




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.





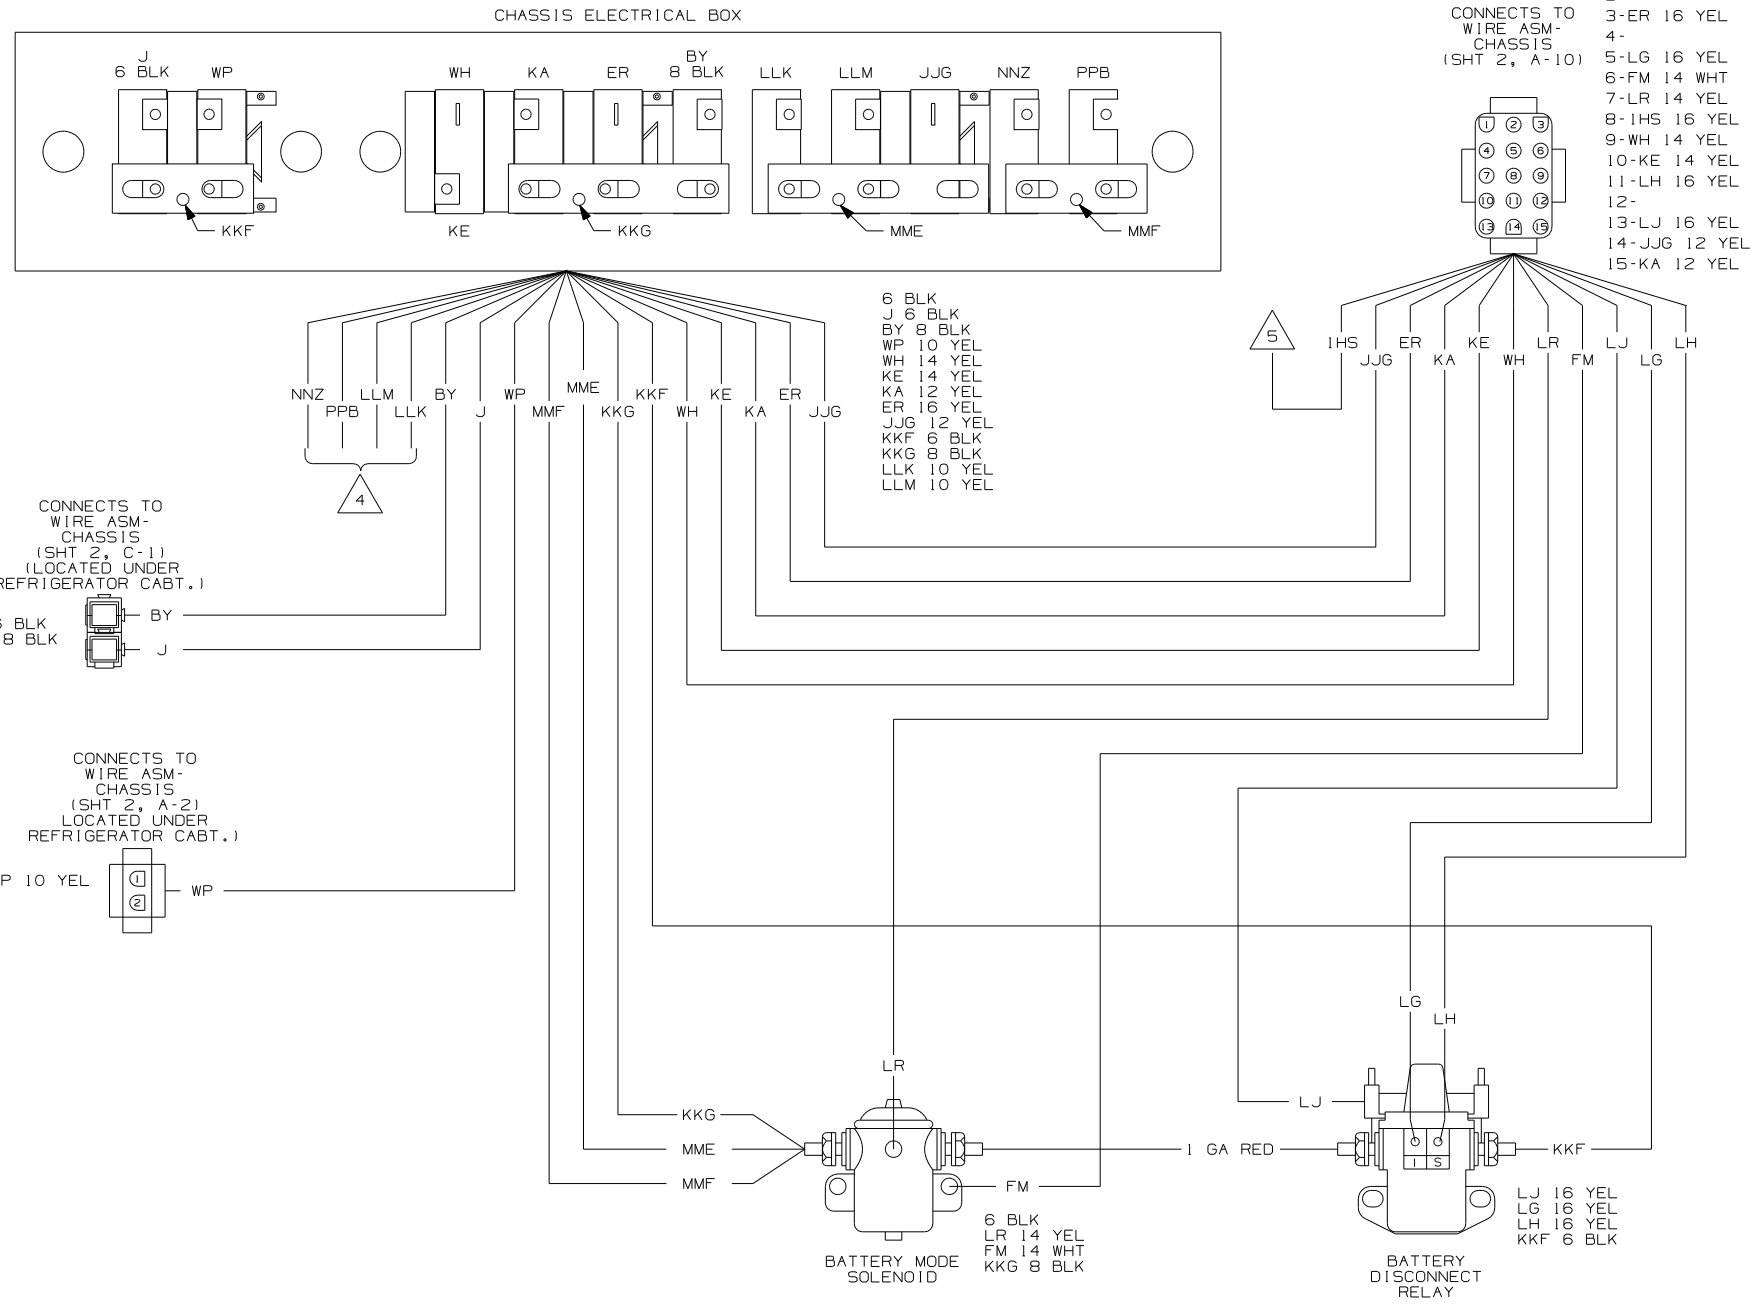


- △ 6 CIRCUITS MME AND MMF ARE PART OF WIRE ASM-SLIDEOUT BREAKERS.
- △ 5 CIRCUIT IS NOT USED.
- △ 4 WIRE IS FROM WIRE ASM-SLIDEOUT POWER.
- △ 3 SEE WIRING DIAGRAM-AUTO FOR ADDITIONAL INFORMATION.
- △ 2 SEE MANUFACTURERS DIAGRAM FOR ADDITIONAL INFORMATION.

NOTES:
1. SPLICES ARE THEORETICAL AND MAY DIFFER IN THE HARNESS.


WIRING DIAGRAM-ELECTRICAL BOX
(WIRE ASM 124125-03 REV-L)
WIRING DIAGRAM-SLIDEOUT BREAKERS △ 6
(WIRE ASM 148561-02 REV D)

WINNEBAGO		COPYRIGHT 2004 WINNEBAGO INDUSTRIES, INC.	
DFTR	ORIG. DATE		
CHKR	P.E.	ALL DIMENSIONS ARE IN MILLIMETERS	
M.E.	DSNR	FIRST USED 06 D34A	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X)	:		
ONE-PLACE (X.X)	:		
TWO-PLACE (X.XX)	:		
ANGLE	:		
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: WIRING DIAGRAM-BODY, 12V			
SHEET 1 of 7	PART NO	154231	
REF:		1 5/9/2005	

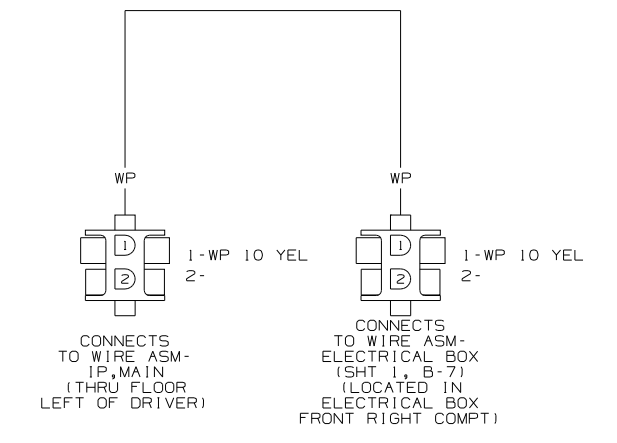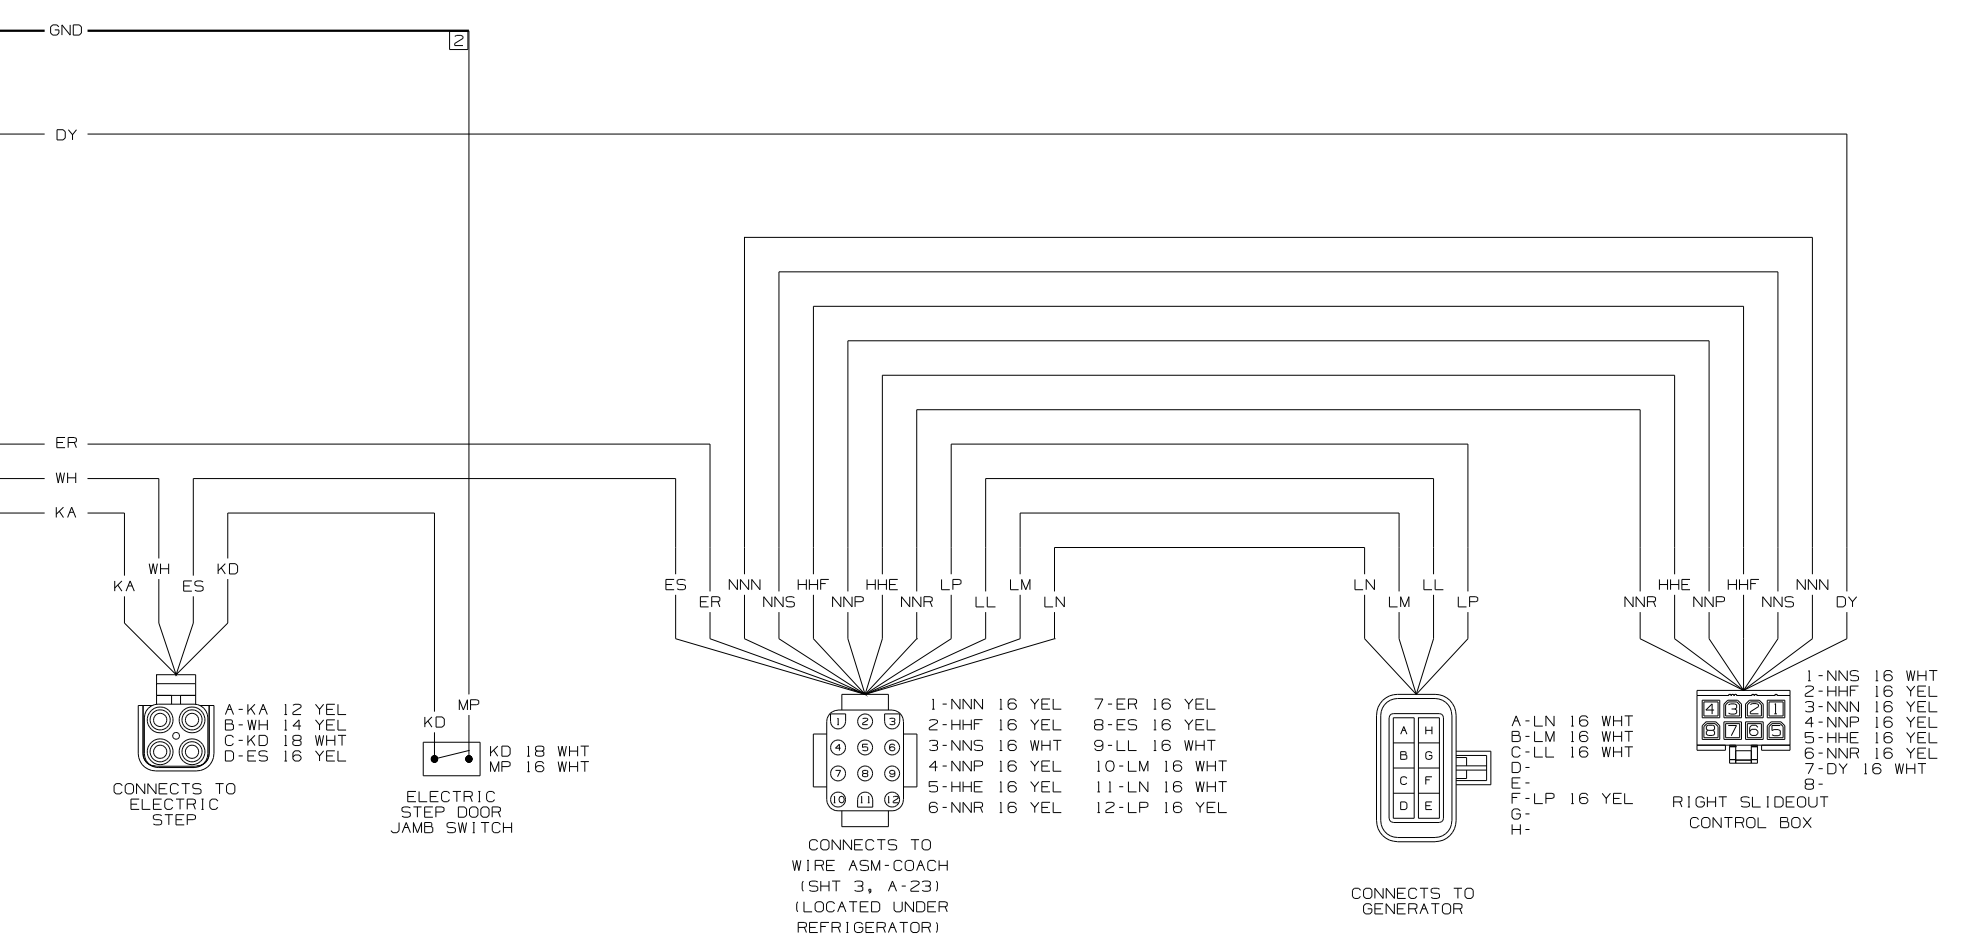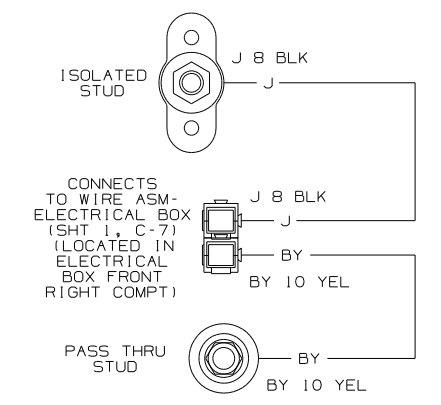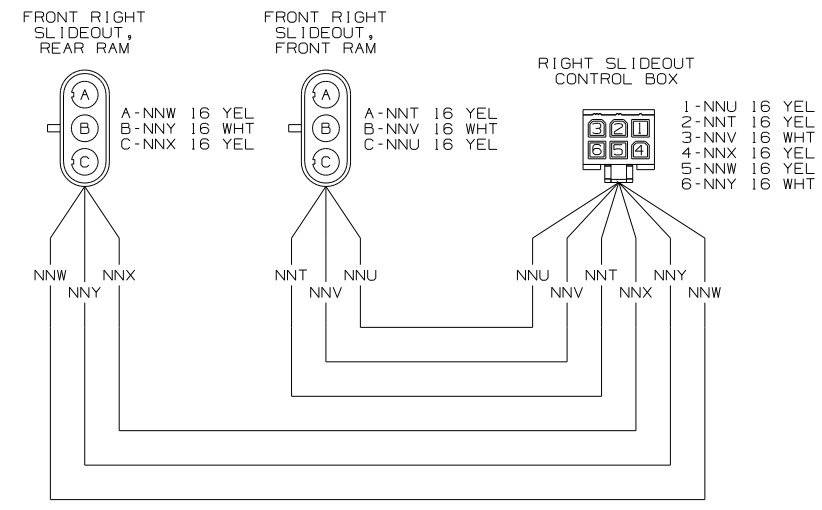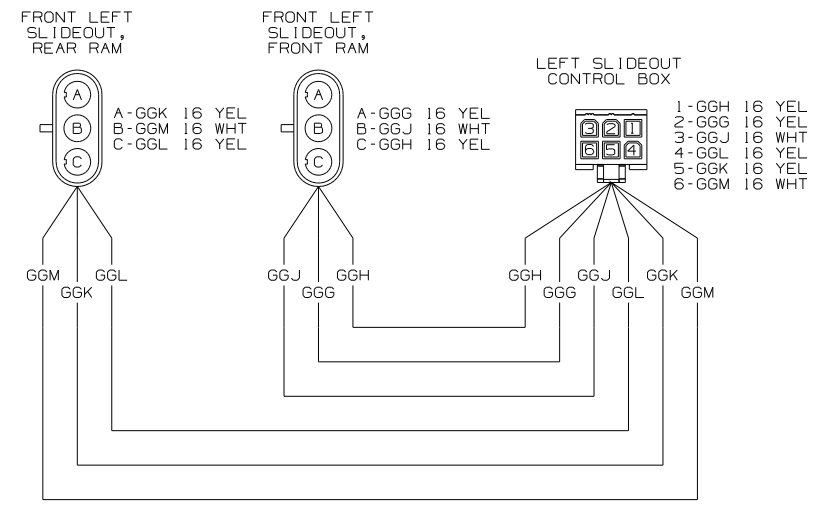

WIRING DIAGRAM-CHASSIS
(WIRE ASM 154233 REV-B)

FIRST USED	06 D34A	
TITLE	DO NOT SCALE DRAWING	
	WIRING DIAGRAM-BODY, 12V	
SHEET 2	PART NO	154231

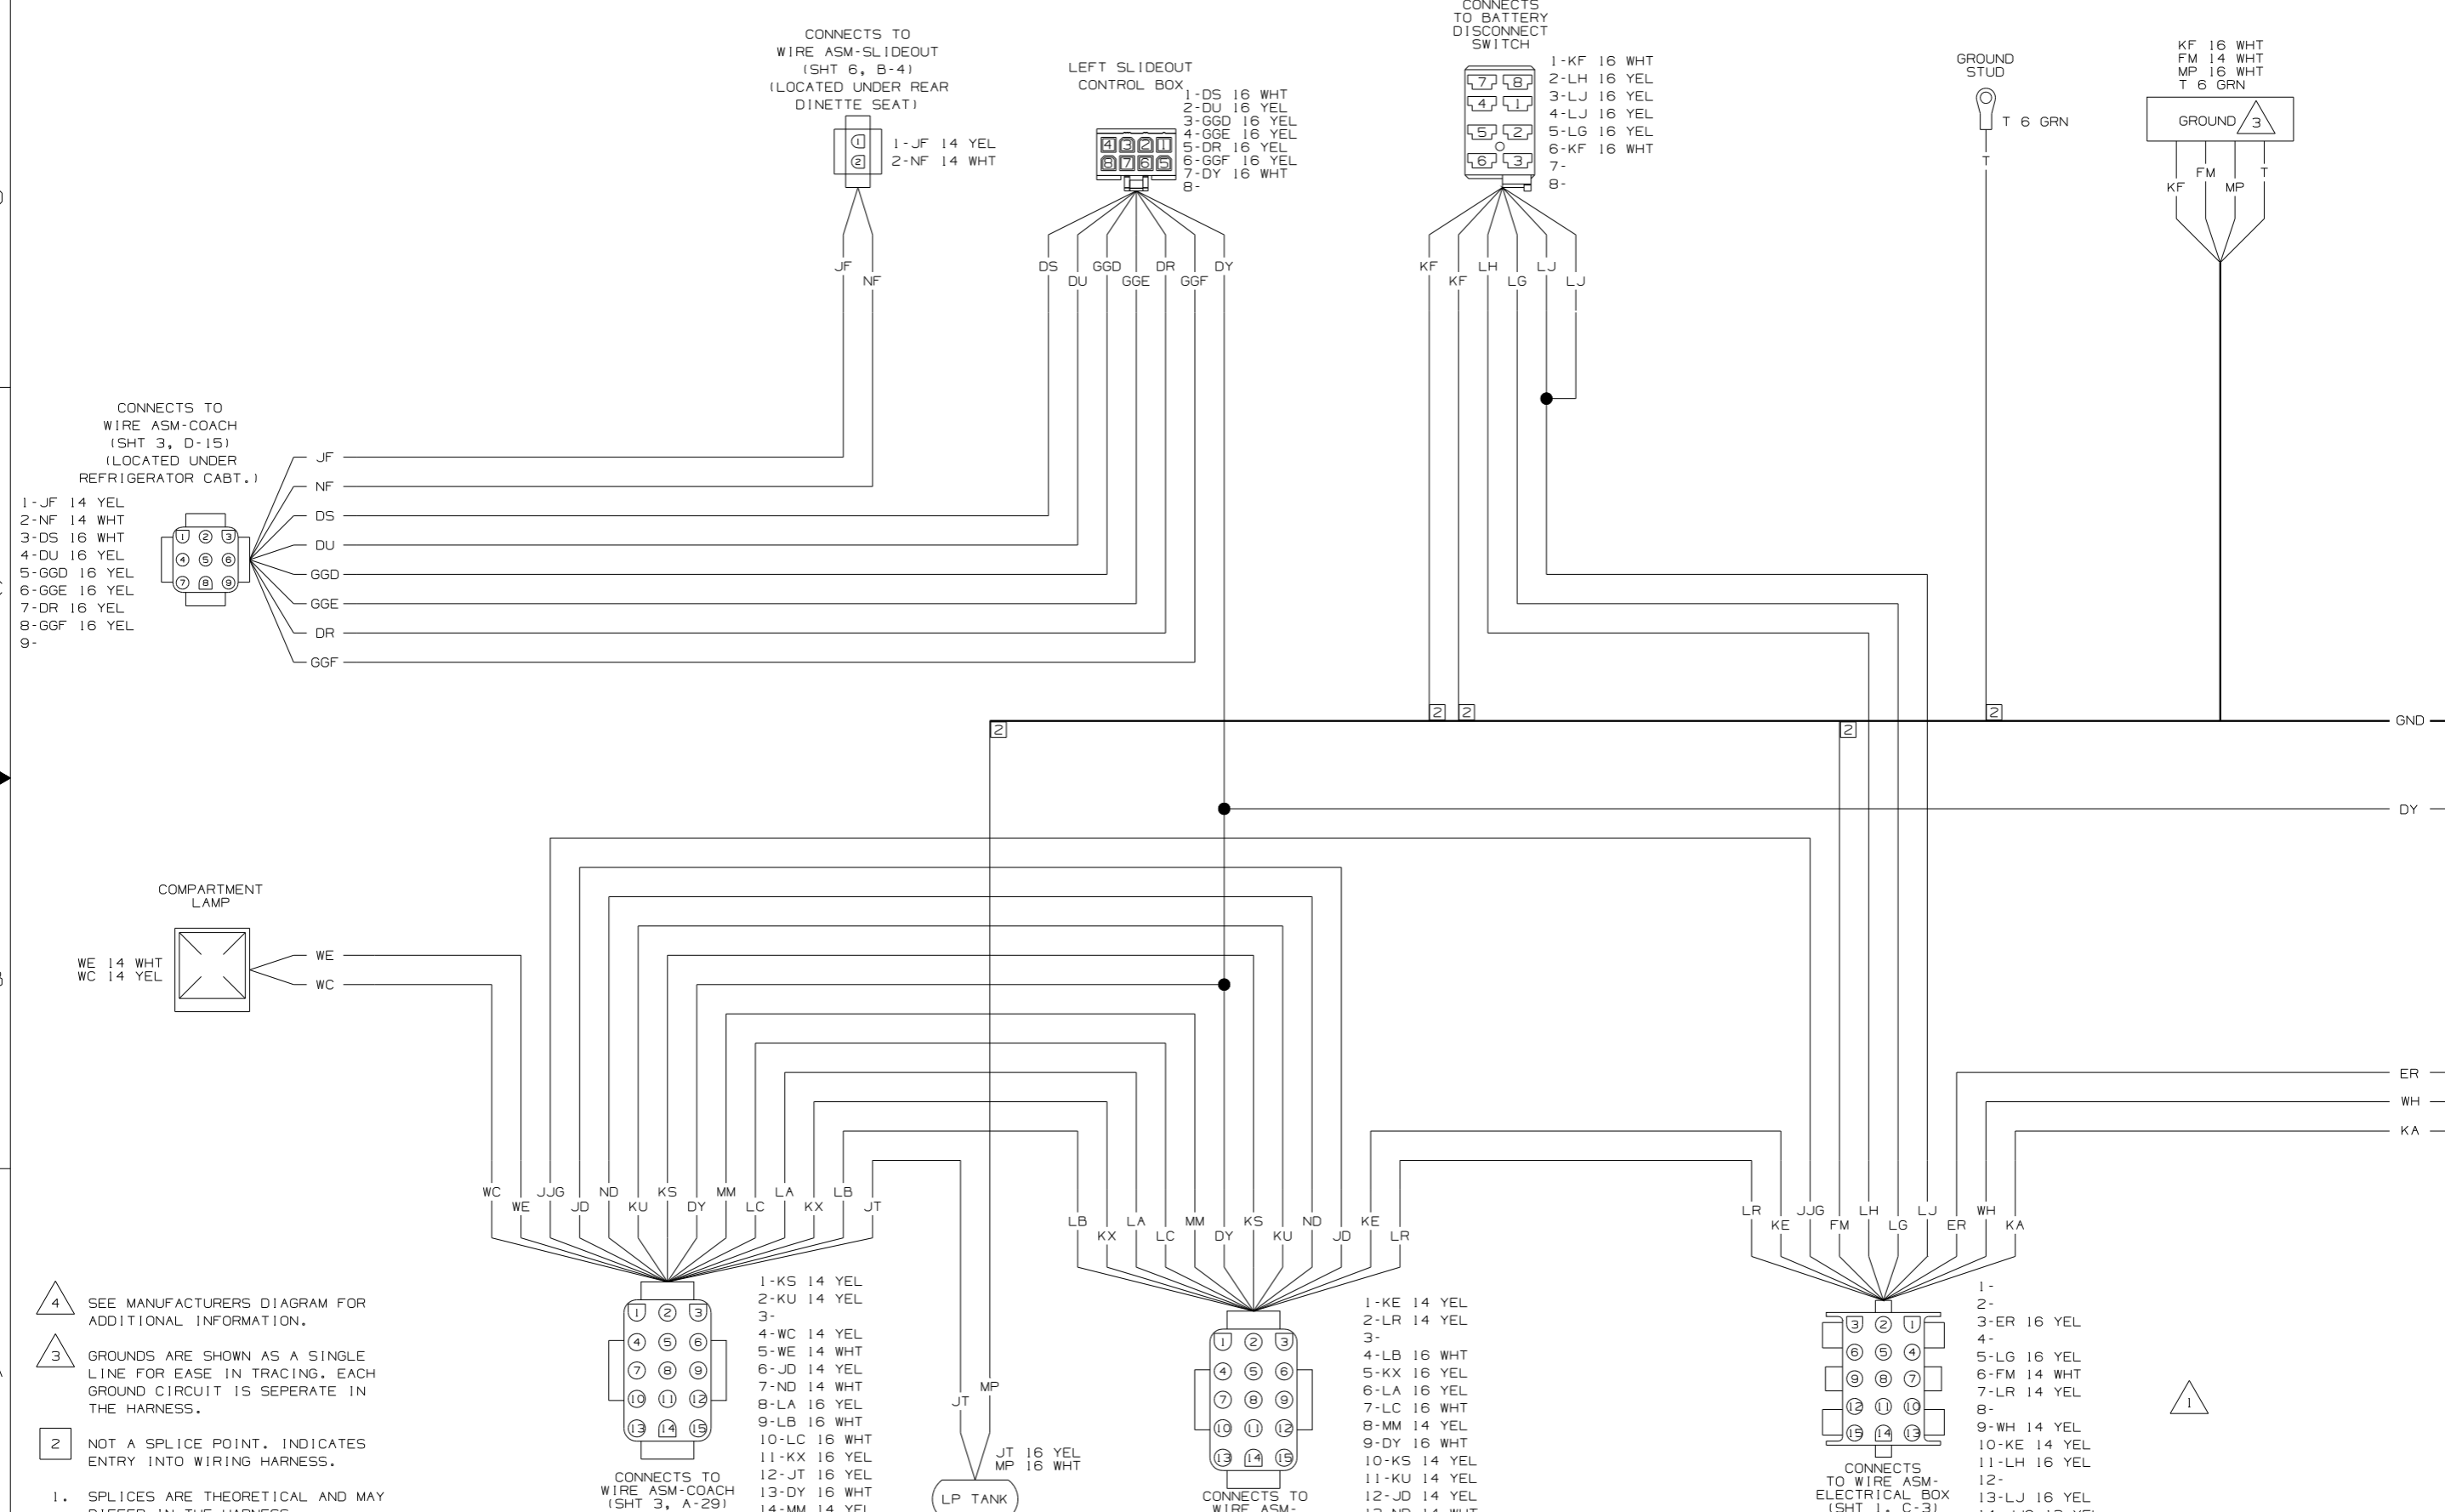

- NOTES:**
- 4 SEE MANUFACTURERS DIAGRAM FOR ADDITIONAL INFORMATION.
 - 3 GROUNDS ARE SHOWN AS A SINGLE LINE FOR EASE IN TRACING. EACH GROUND CIRCUIT IS SEPERATE IN THE HARNESS.
 - 2 NOT A SPLICE POINT. INDICATES ENTRY INTO WIRING HARNESS.
 - 1. SPLICES ARE THEORETICAL AND MAY DIFFER IN THE HARNESS.

PHONE RED 16 YEL
PHONE GRN 16 YEL

PHONE INPUT




PHONE JACK



PHONE RED 16 YEL
PHONE GRN 16 YEL

GND

GL-1

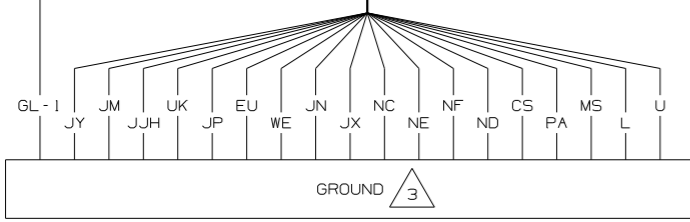


- | | | | |
|-------------|-----------|-----------|-----------|
| JY 12 WHT | JP 14 WHT | NC 14 WHT | PA 14 WHT |
| GL-1 14 WHT | EU 16 WHT | NE 14 WHT | MS 14 WHT |
| JM 14 WHT | WE 14 WHT | NF 14 WHT | L 8 GRN |
| JJH 12 WHT | JN 14 WHT | ND 14 WHT | U 8 GRN |
| UK 16 WHT | JX 14 WHT | CS 14 WHT | |

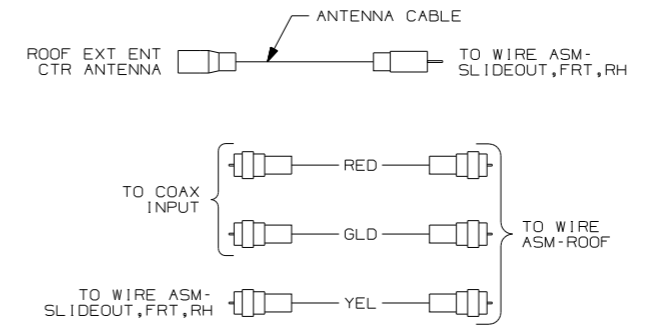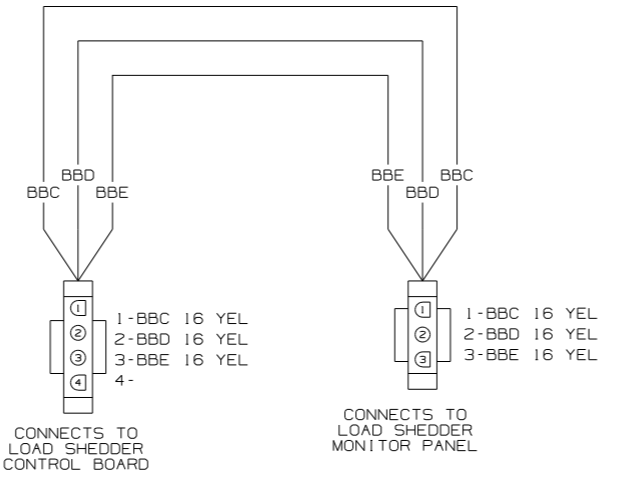




WIRING DIAGRAM-COACH
(WIRE ASM 154238 REV-C)

FIRST USED	06 D34A	
TITLE	DO NOT SCALE DRAWING	
	WIRING DIAGRAM-BODY, 12V	
F1 SHEET 3	PART NO	154231



D
C
B
A

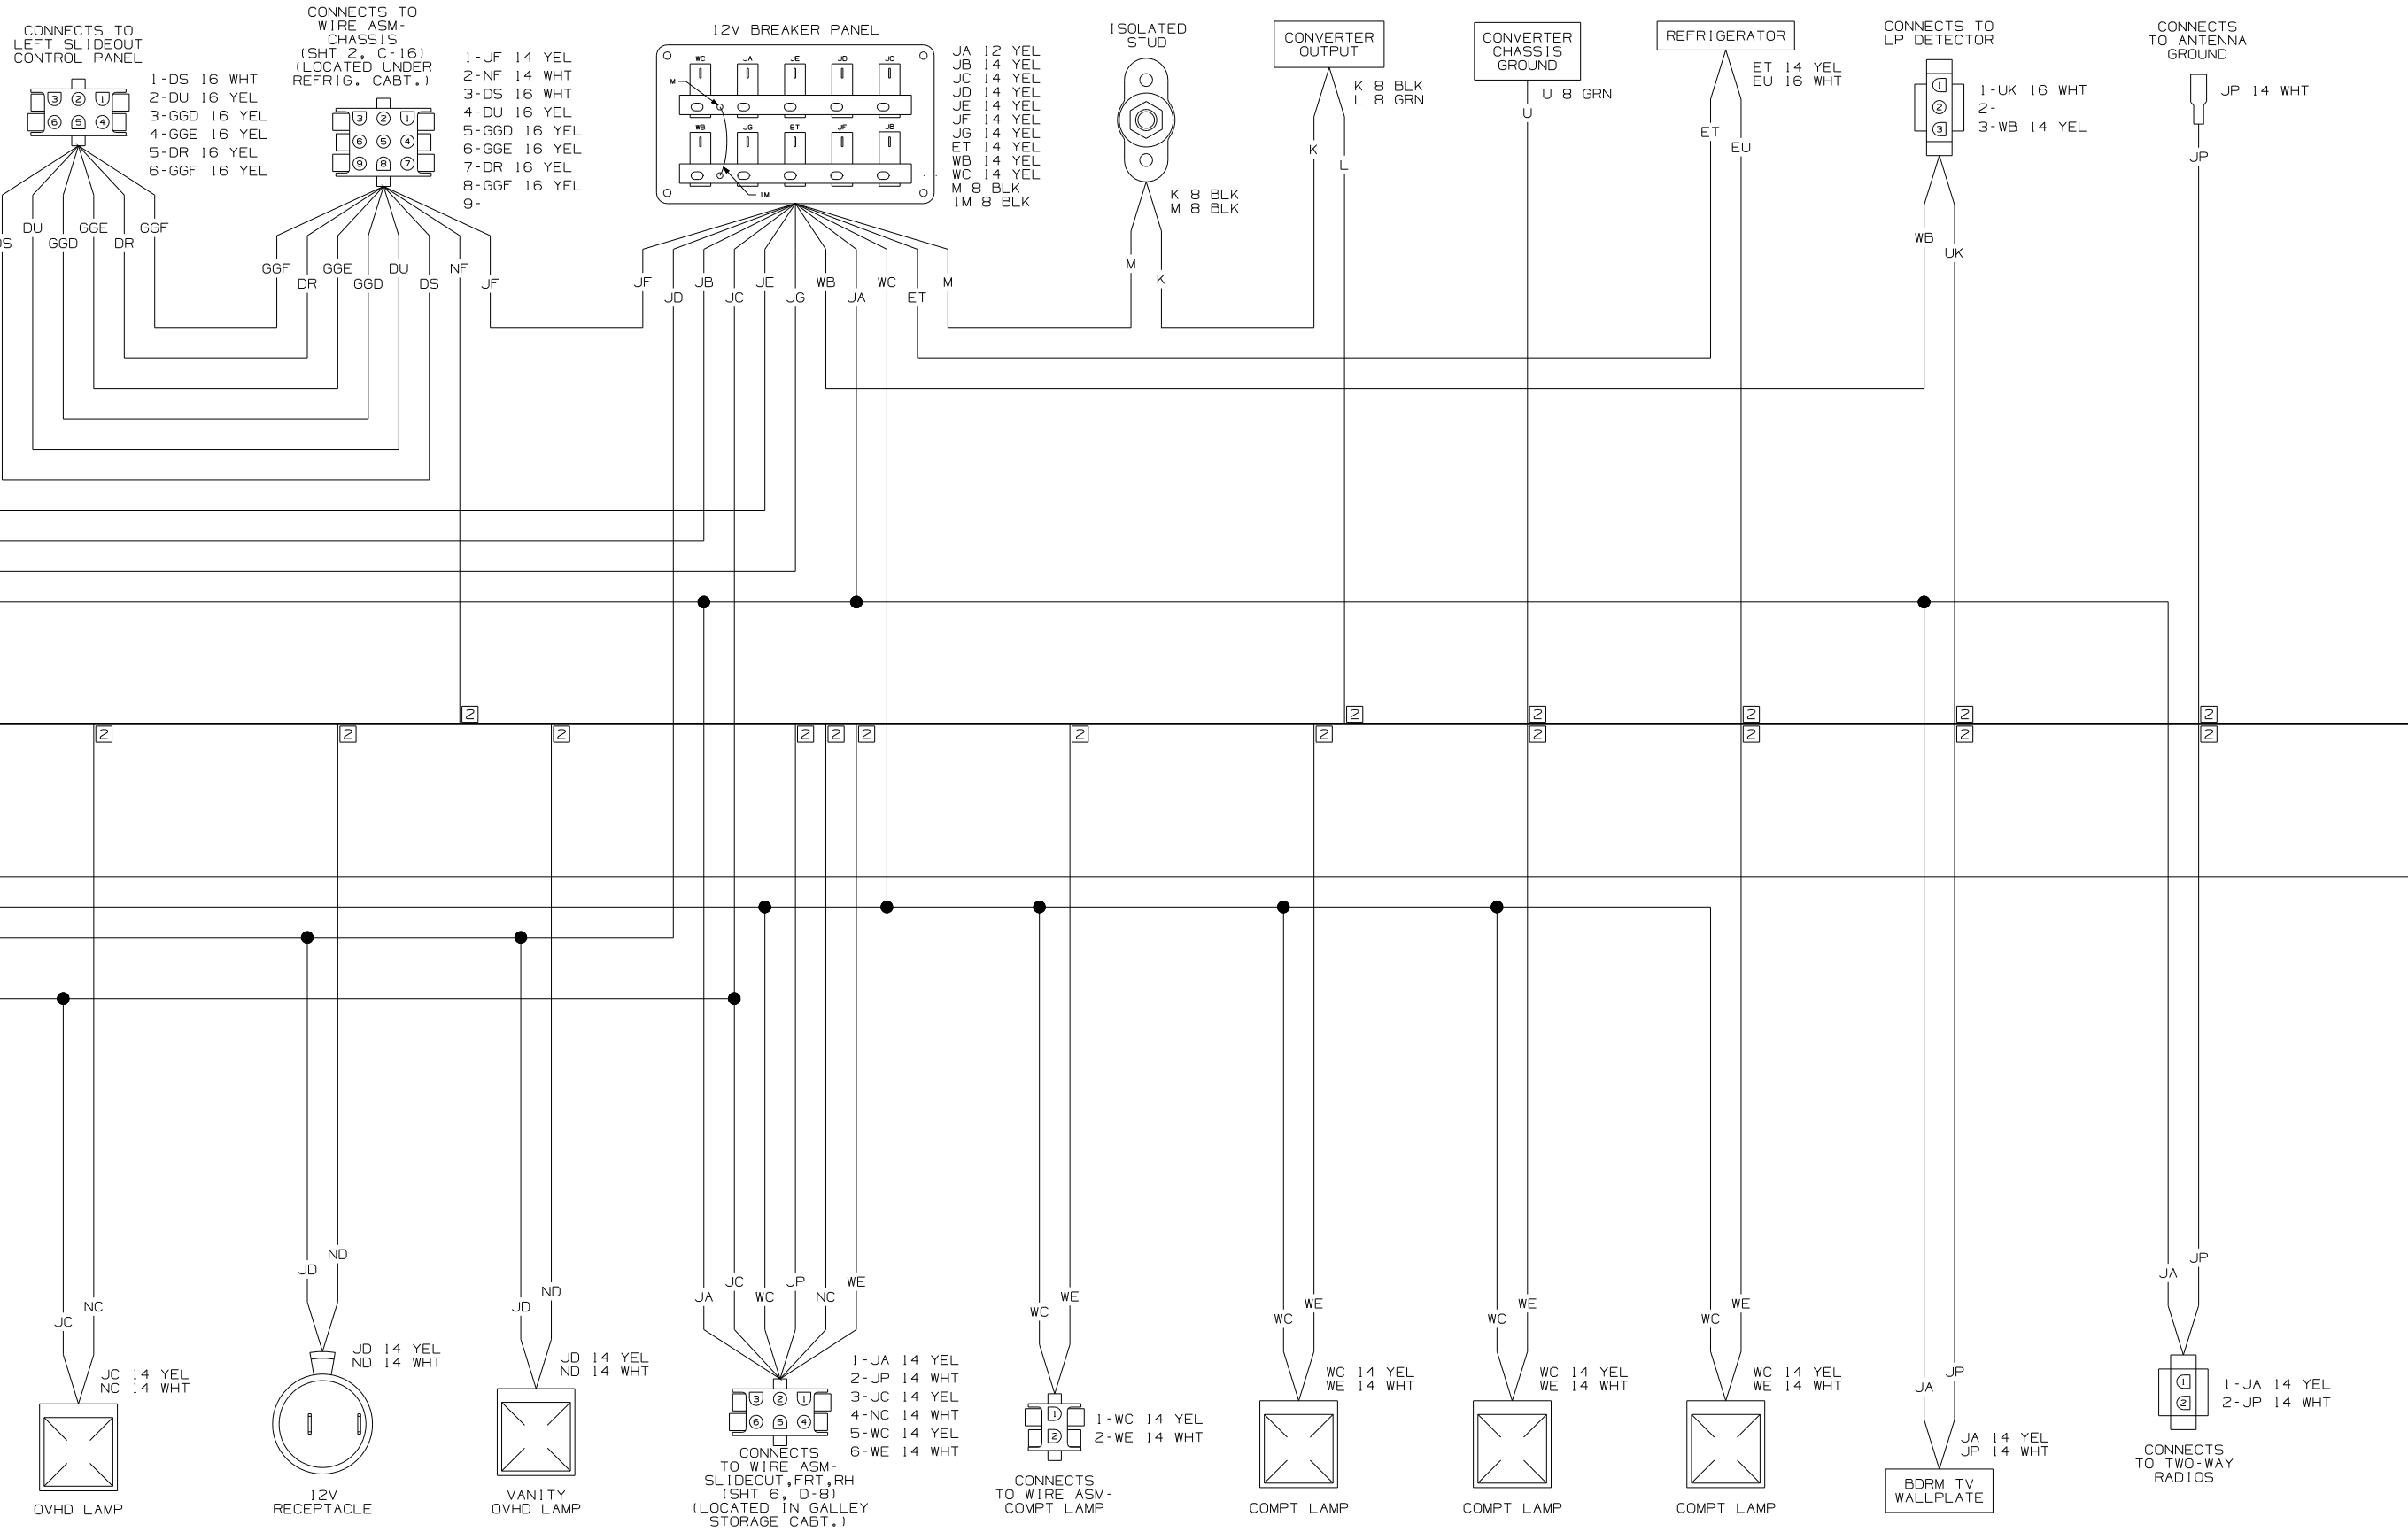

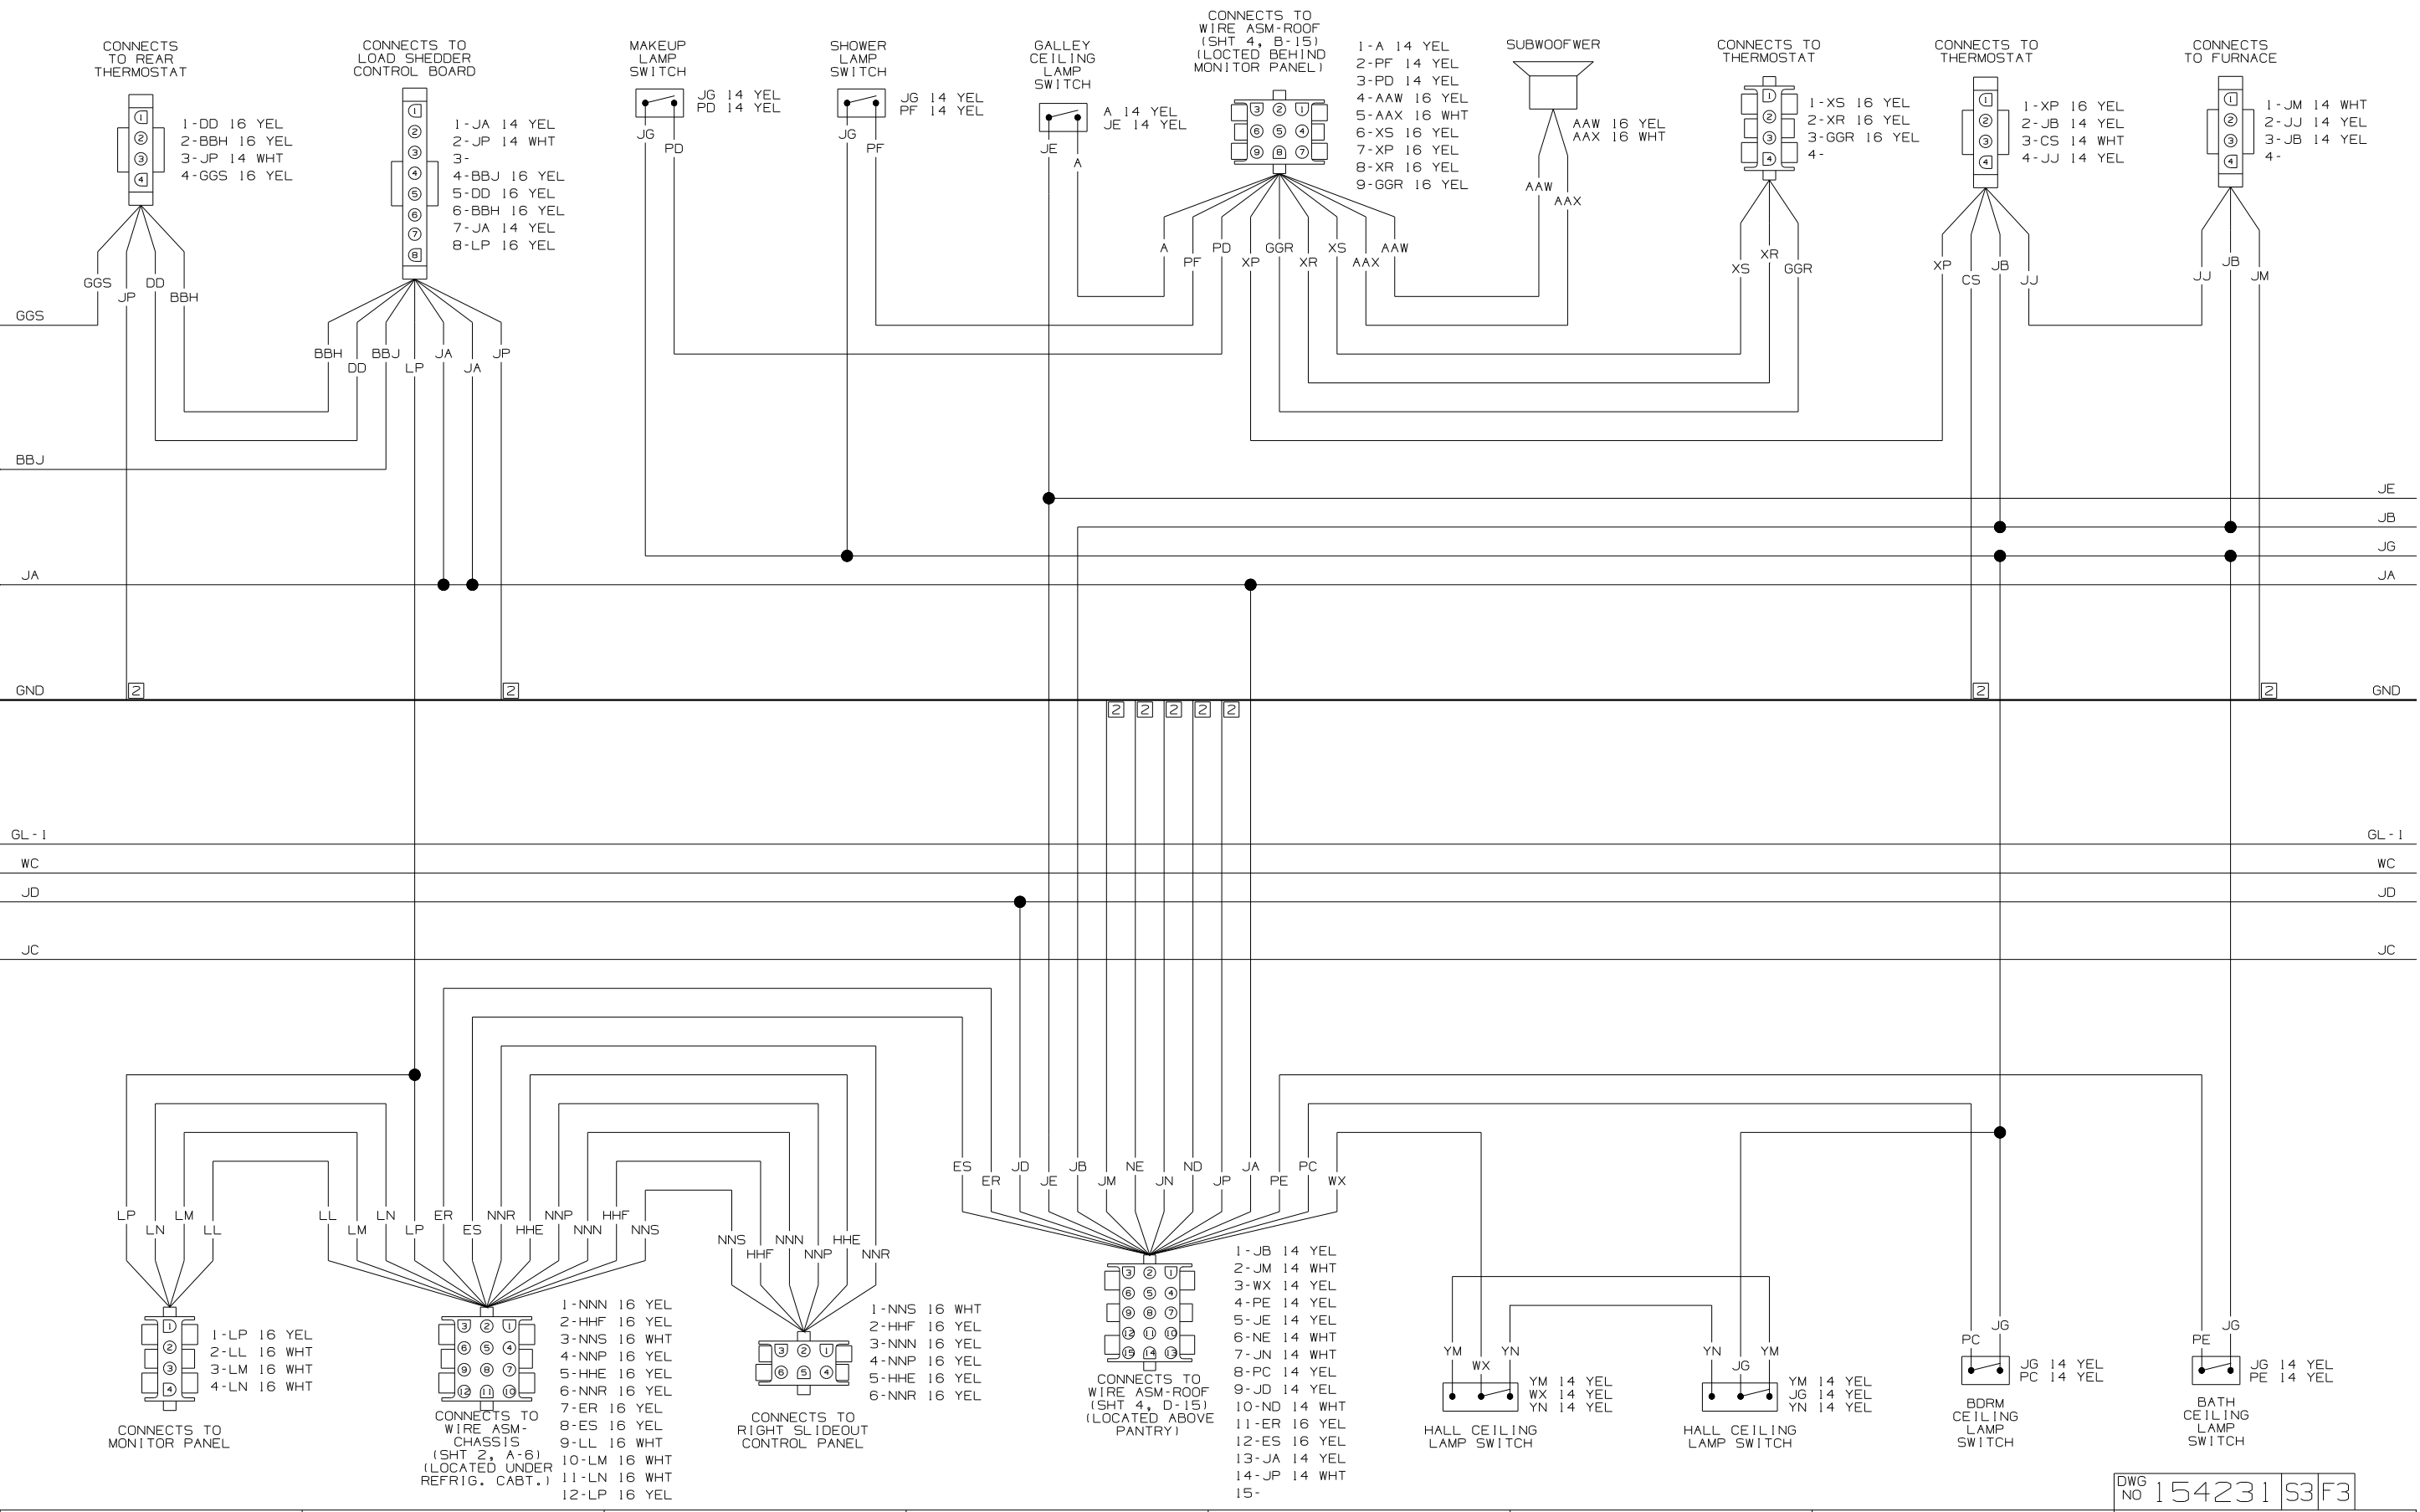

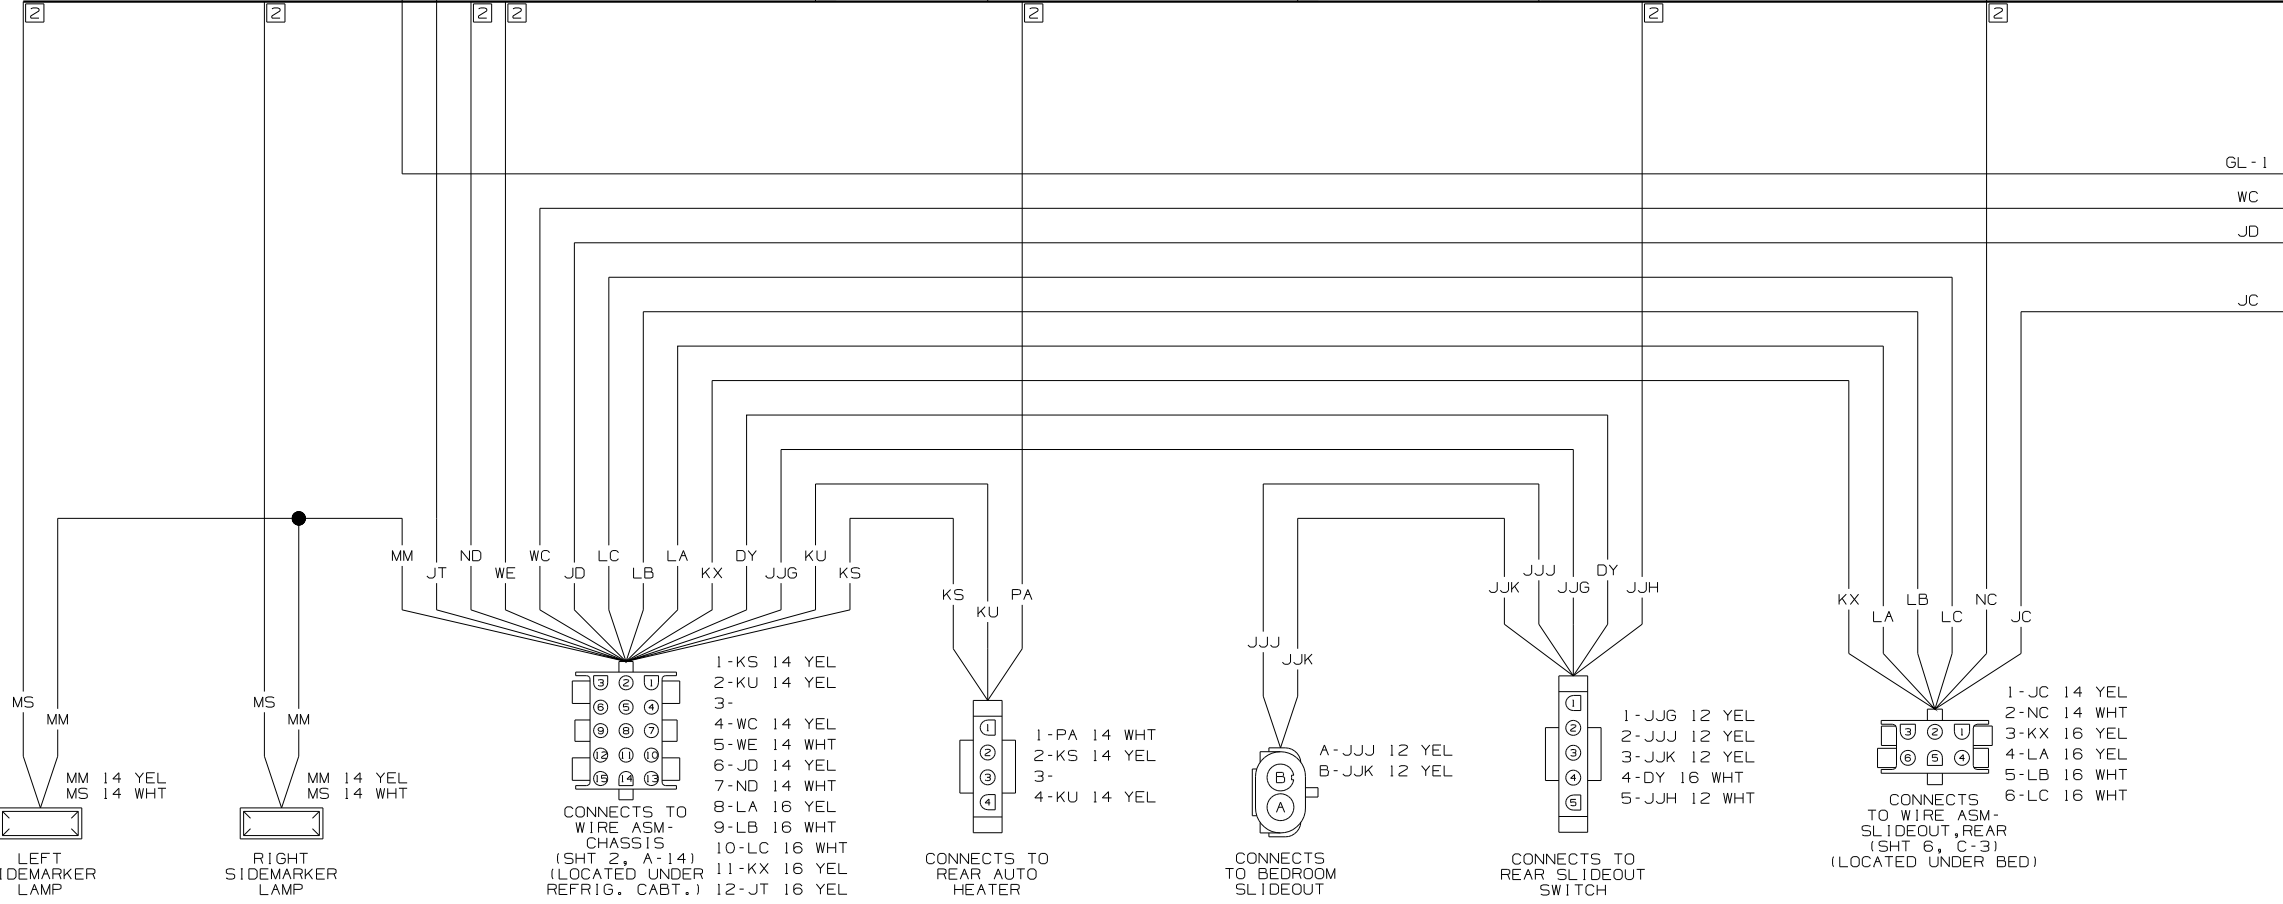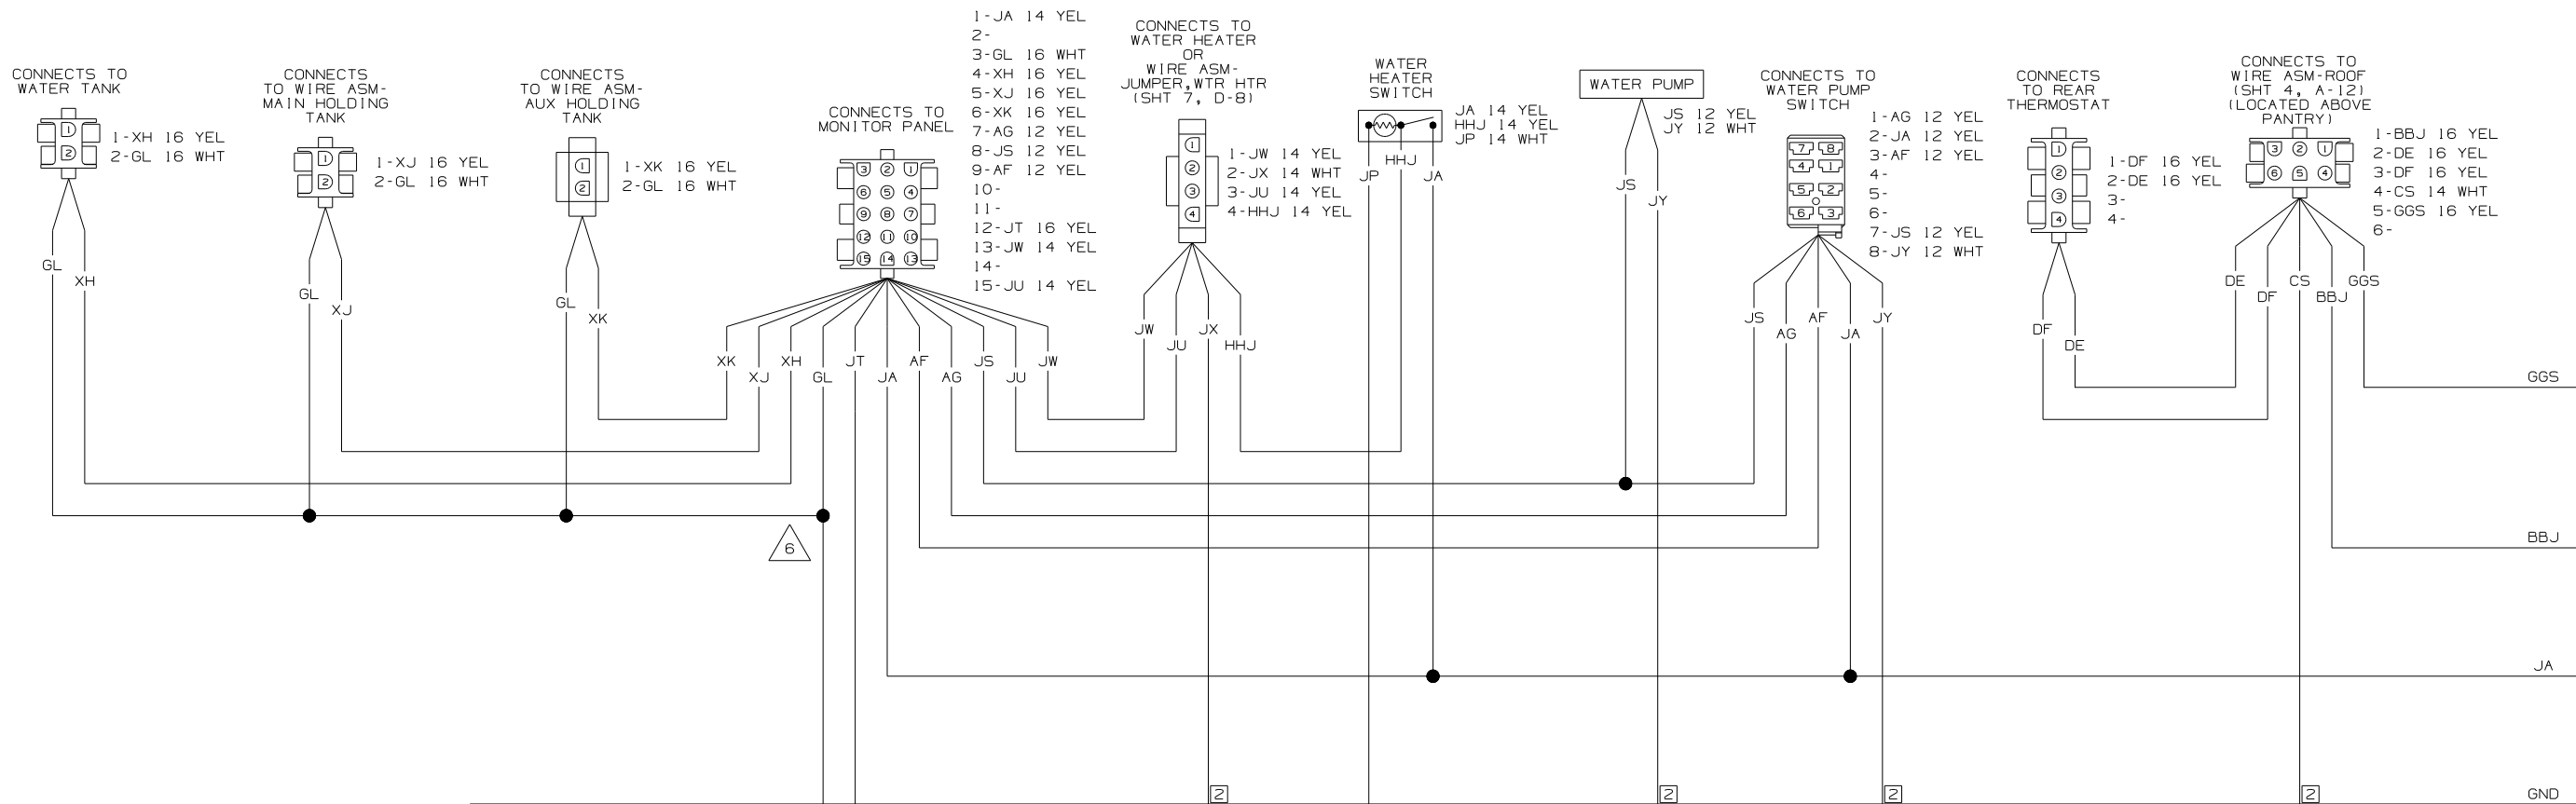

NOTES:
1. SPLICES ARE THEORETICAL AND MAY DIFFER IN THE HARNESS.

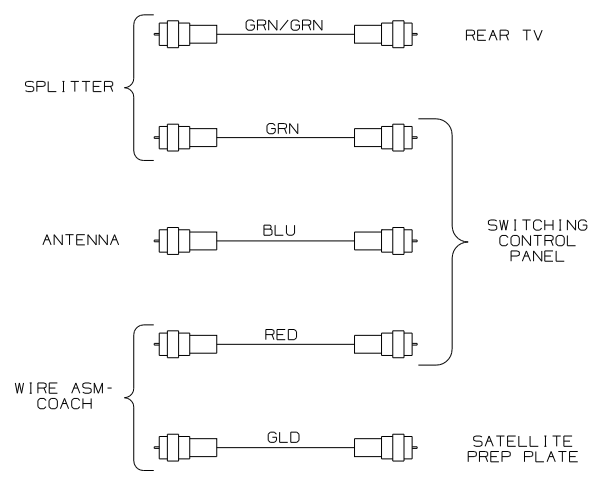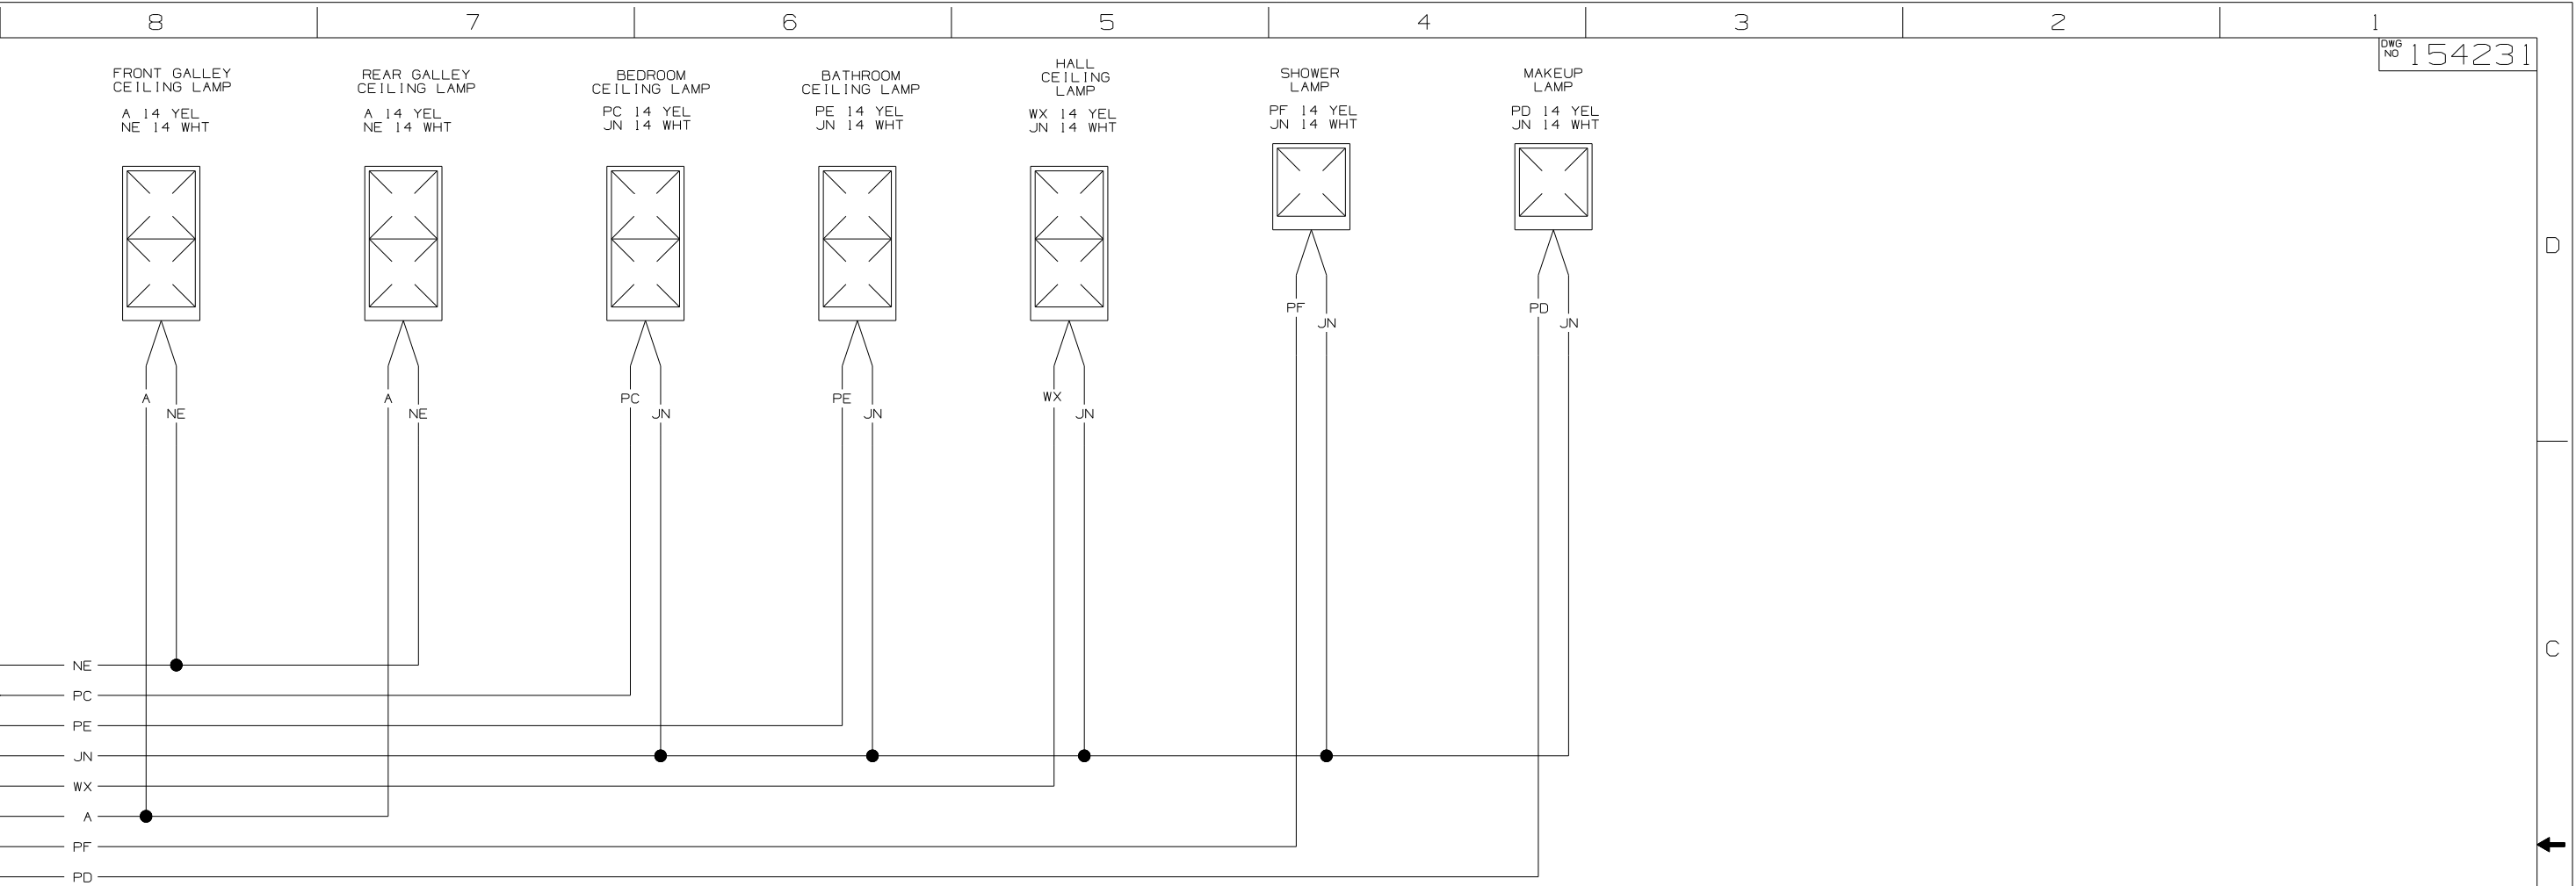

WIRING DIAGRAM-ROOF
WIRE ASM-151669 REV-B

FIRST USED	06 D34A	
TITLE	DO NOT SCALE DRAWING	
	WIRING DIAGRAM-ROOF	
SHEET 4	PART NO	154231

D


C

B

A


CONNECTS TO
WIRE ASM-COACH
(SHT 3, A-21)
(LOCATED ABOVE
PANTRY)

- 1-JB 14 YEL
- 2-JM 14 WHT
- 3-WX 14 YEL
- 4-PE 14 YEL
- 5-JE 14 YEL
- 6-NE 14 WHT
- 7-JN 14 WHT
- 8-PC 14 YEL
- 9-JD 14 YEL
- 10-ND 14 WHT
- 11-ER 16 YEL
- 12-ES 16 YEL
- 13-JA 14 YEL
- 14-JP 14 WHT
- 15-




CONNECTS TO
WIRE ASM-COACH
(SHT 3, D-20)
(LOCATED BEHIND
MONITOR PANEL)

- 1-A 14 YEL
- 2-PF 14 YEL
- 3-PD 14 YEL
- 4-SUB POS (PUR) 16 YEL
- 5-SUB NEG (PUR) 16 WHT
- 6-XS 16 YEL
- 7-XP 16 YEL
- 8-XR 16 YEL
- 9-GGR 16 YEL




DIGITAL
SATILLITE
ELEVATION
SENSOR




JA 14 YEL
JP 14 WHT

SWITCHING
CONTROL
CENTER




JA 14 YEL
JP 14 WHT

BATH VENT
FAN




JB 14 YEL
JM 14 WHT

GALLEY
VENT
FAN




JB 14 YEL
JM 14 WHT

CONNECTS TO
WIRE ASM-SIDEWALL
(SHT 6, A-8)
(LOCATED FRONT
TV OVHD)




- 1-JE 14 YEL
- 2-NE 14 WHT
- 3-ES 16 YEL
- 4-ER 16 YEL
- 5-PL 14 YEL
- 6-

LOUNGE
CEILING
LAMP



PL 14 YEL
NE 14 WHT

WARDROBE
LAMP





JD 14 YEL
ND 14 WHT
PG 14 YEL

WARDROBE
LAMP SWITCH



JD 14 YEL
PG 14 YEL

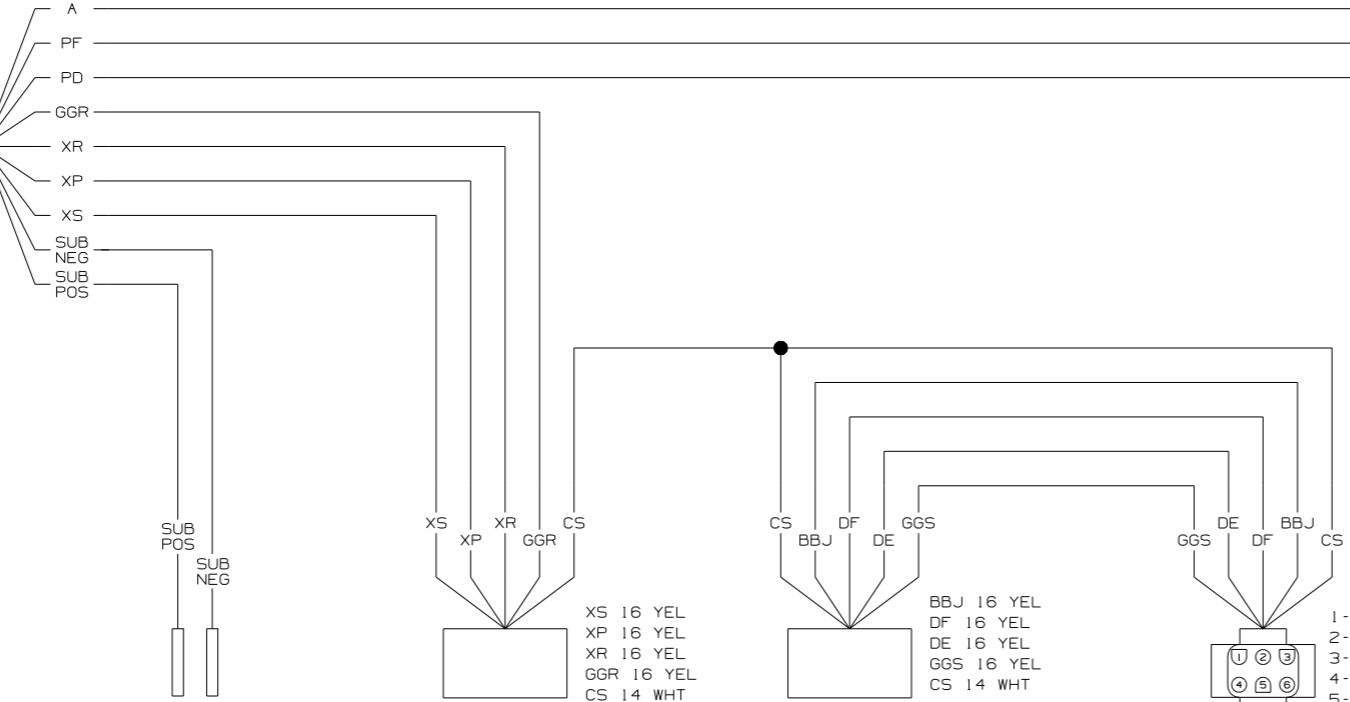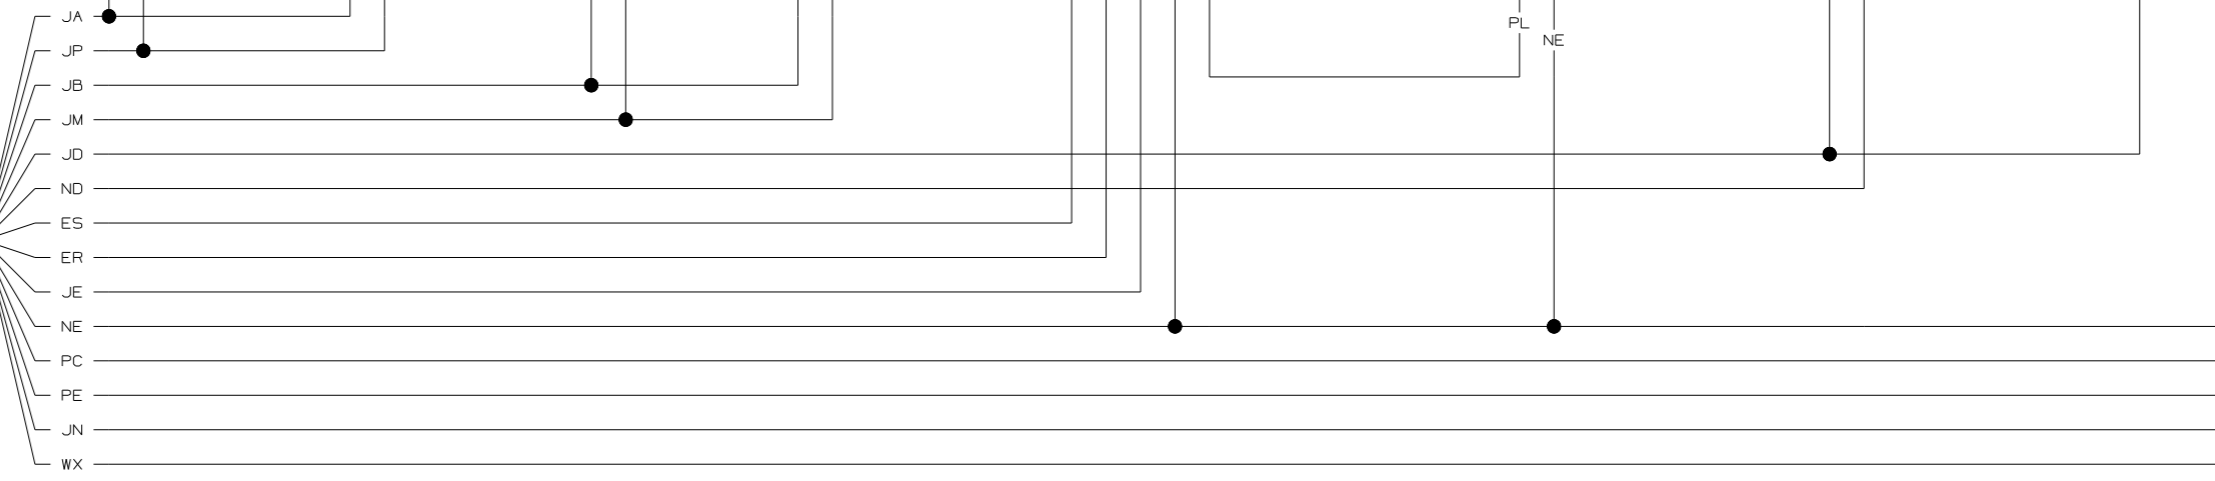









SUB POS (PUR) 16 YEL
SUB NEG (PUR) 16 WHT
HOME THEATER
SUBWOOFWR
OUTPUT

XS 16 YEL
XP 16 YEL
XR 16 YEL
GGR 16 YEL
CS 14 WHT
FRONT A/C






BBJ 16 YEL
DF 16 YEL
DE 16 YEL
GGS 16 YEL
CS 14 WHT
REAR A/C

1-BBJ 16 YEL
2-DE 16 YEL
3-DF 16 YEL
4-CS 14 WHT
5-GGS 16 YEL
6-
CONNECTS TO
WIRE ASM-COACH
(SHT 3, D-25)
(LOCATED ABOVE
PANTRY)


- NE
- PC
- PE
- JN
- WX
- A
- PF
- PD

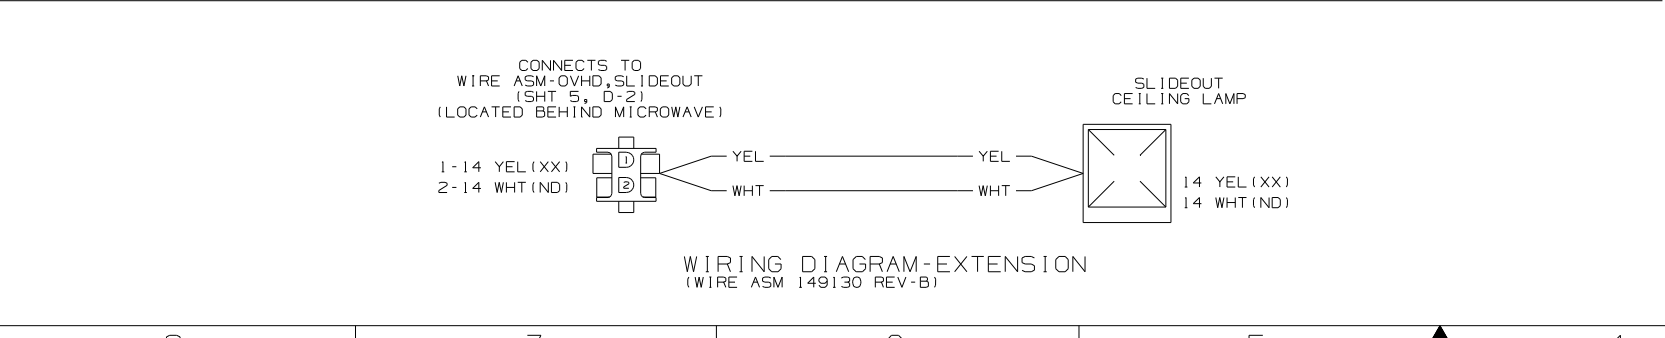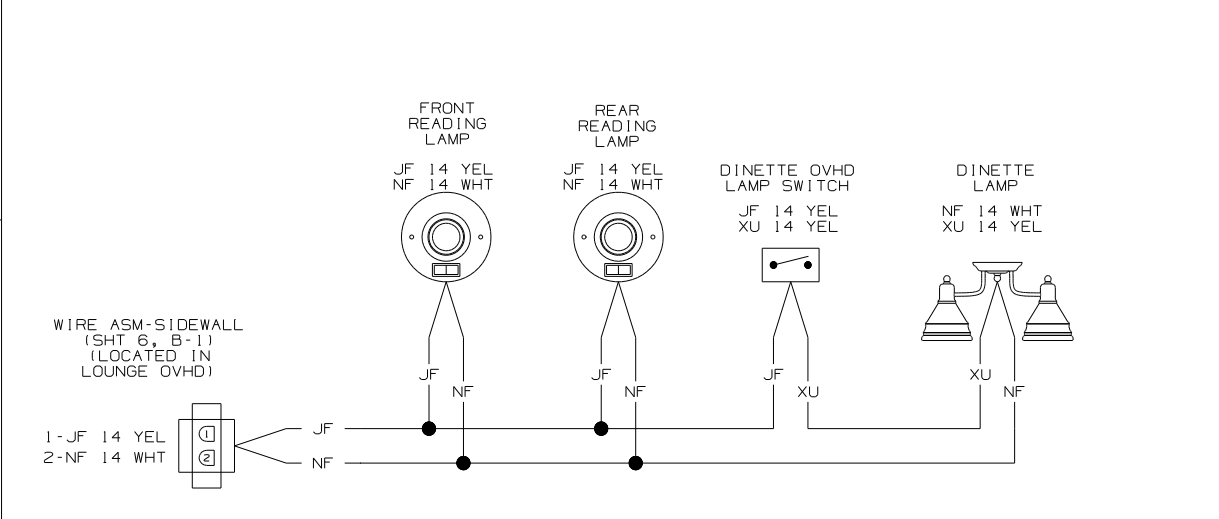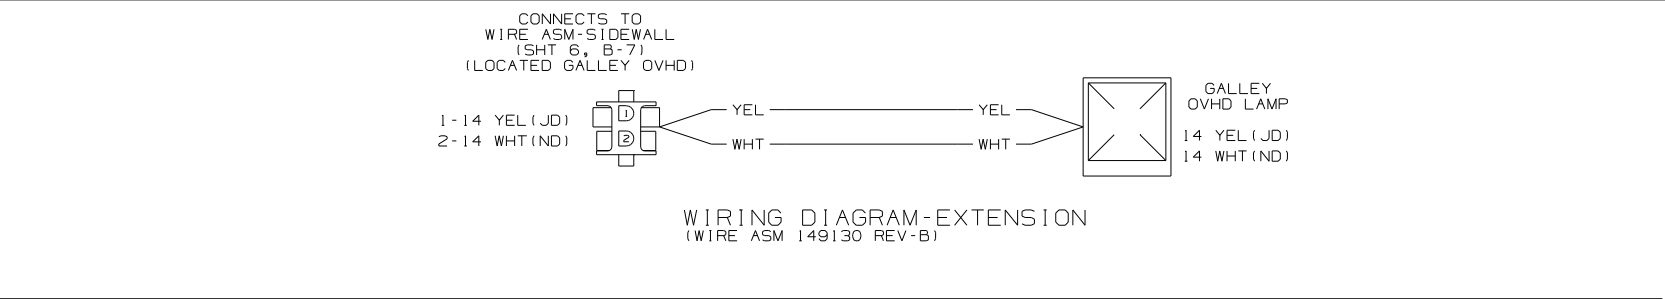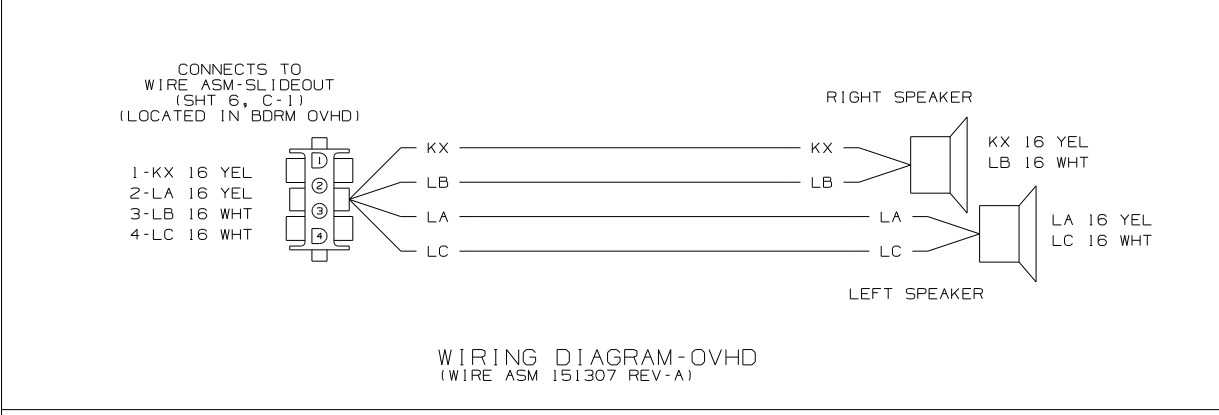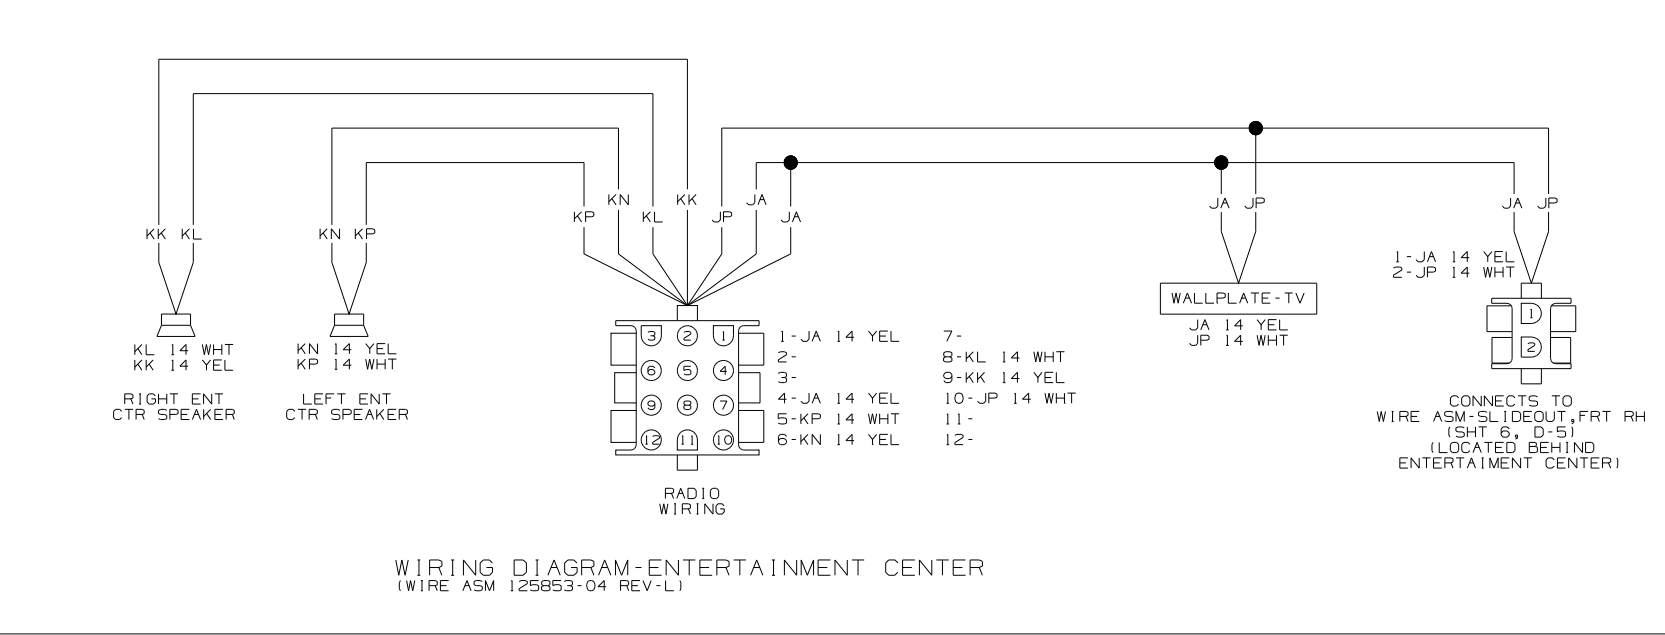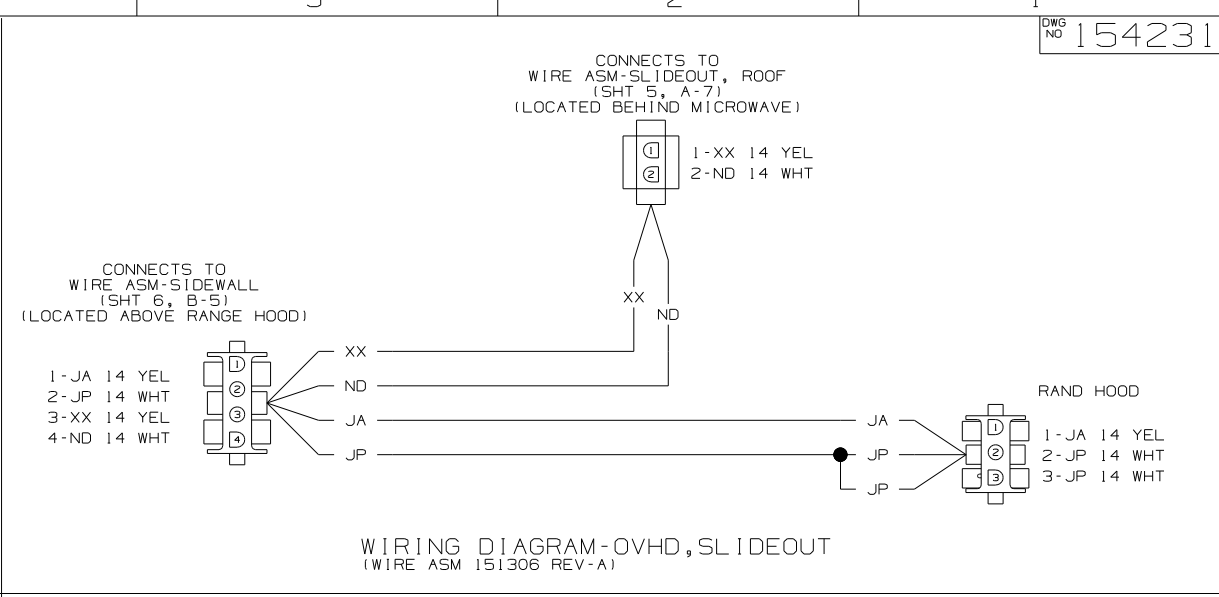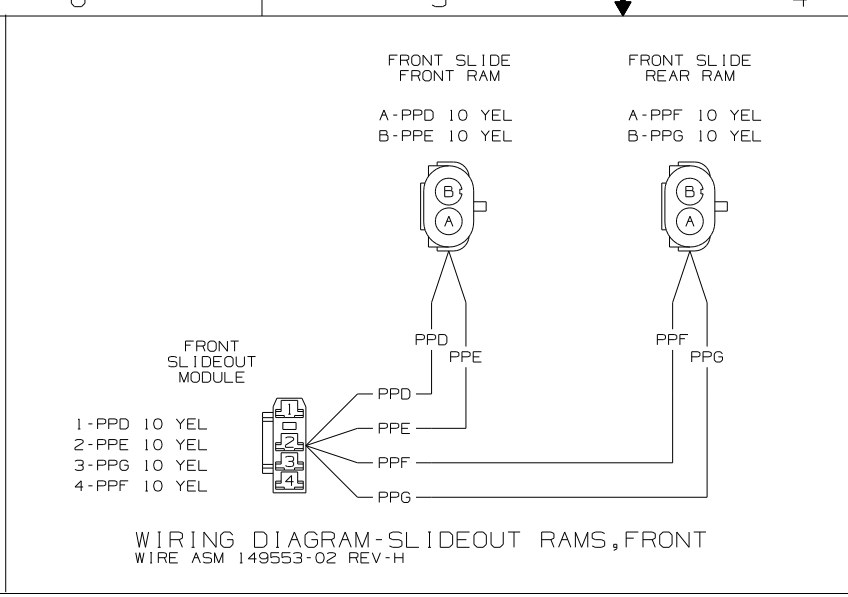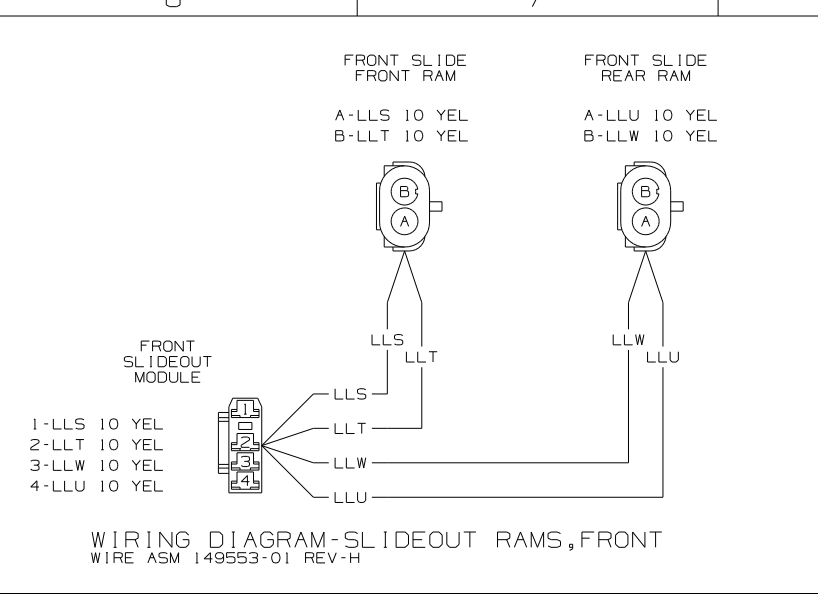

FIRST USED	06 D34A
TITLE	DO NOT SCALE DRAWING
TITLE	WIRING DIAGRAM-BODY 12V
SHEET 5	PART NO 154231

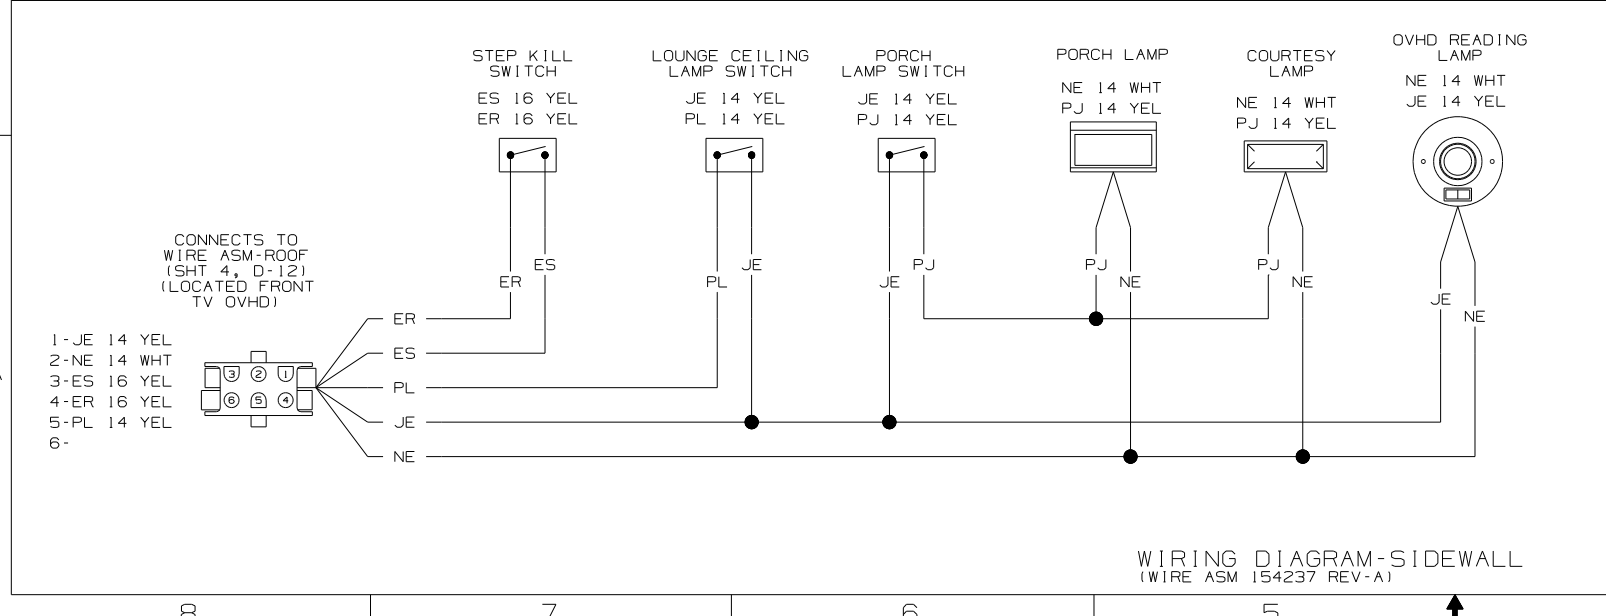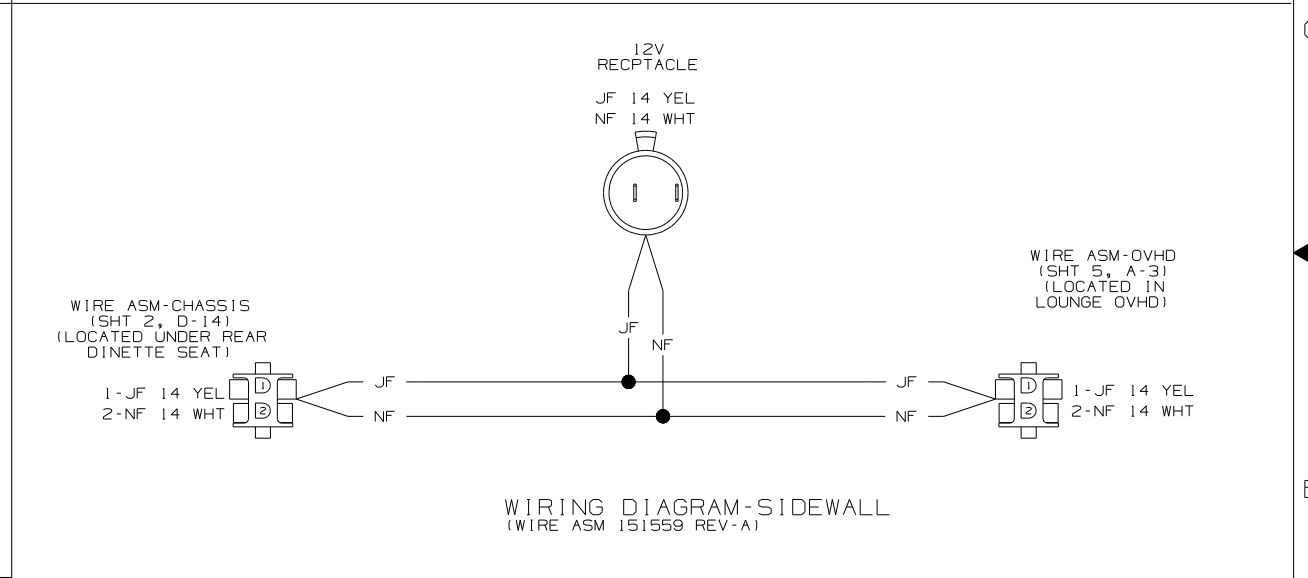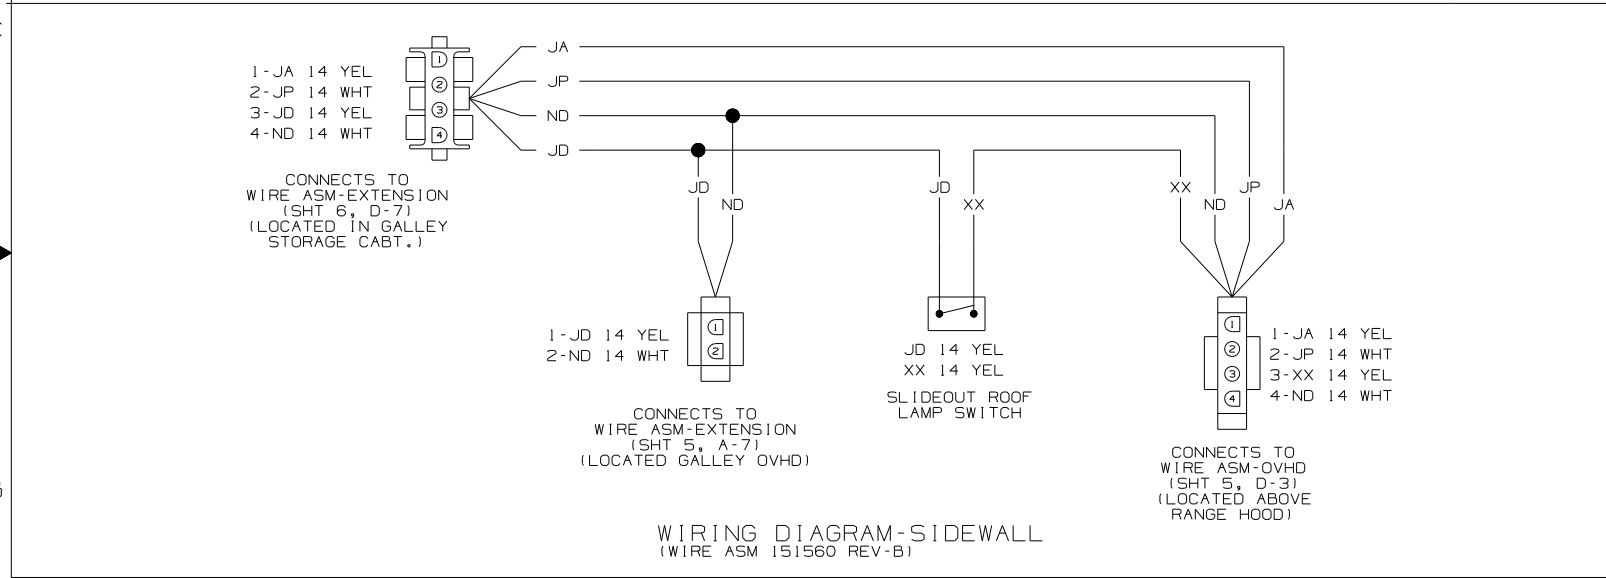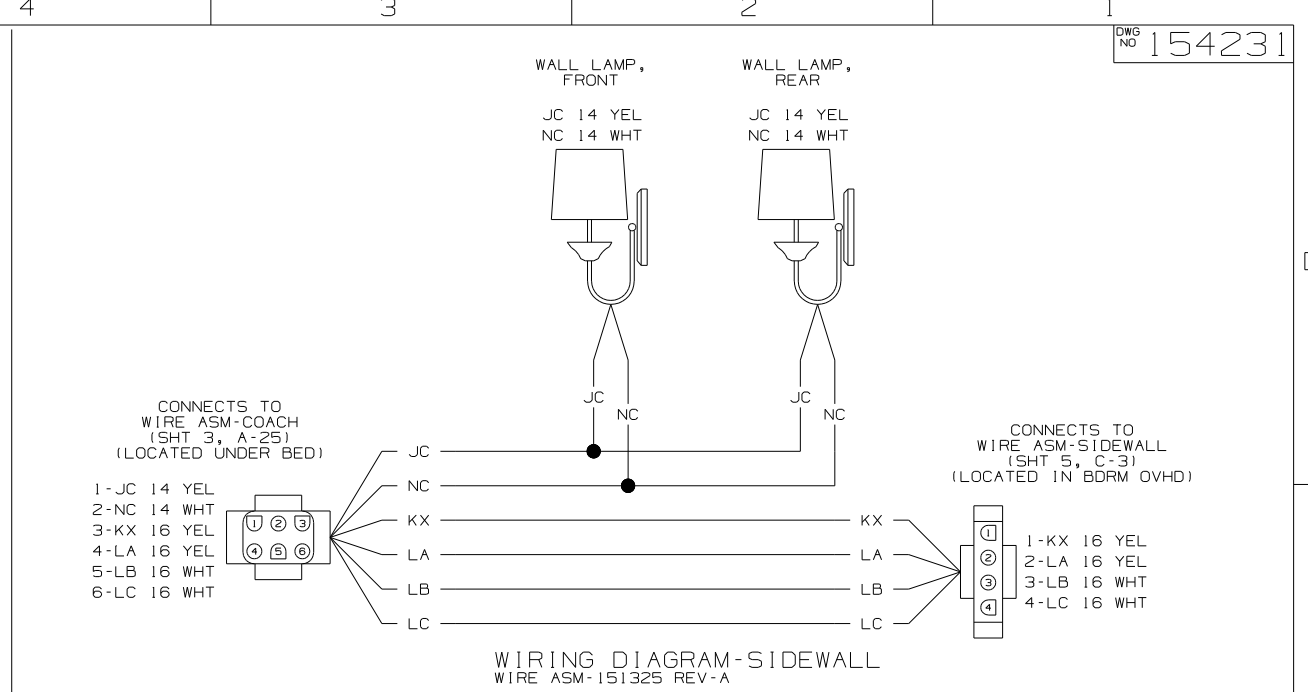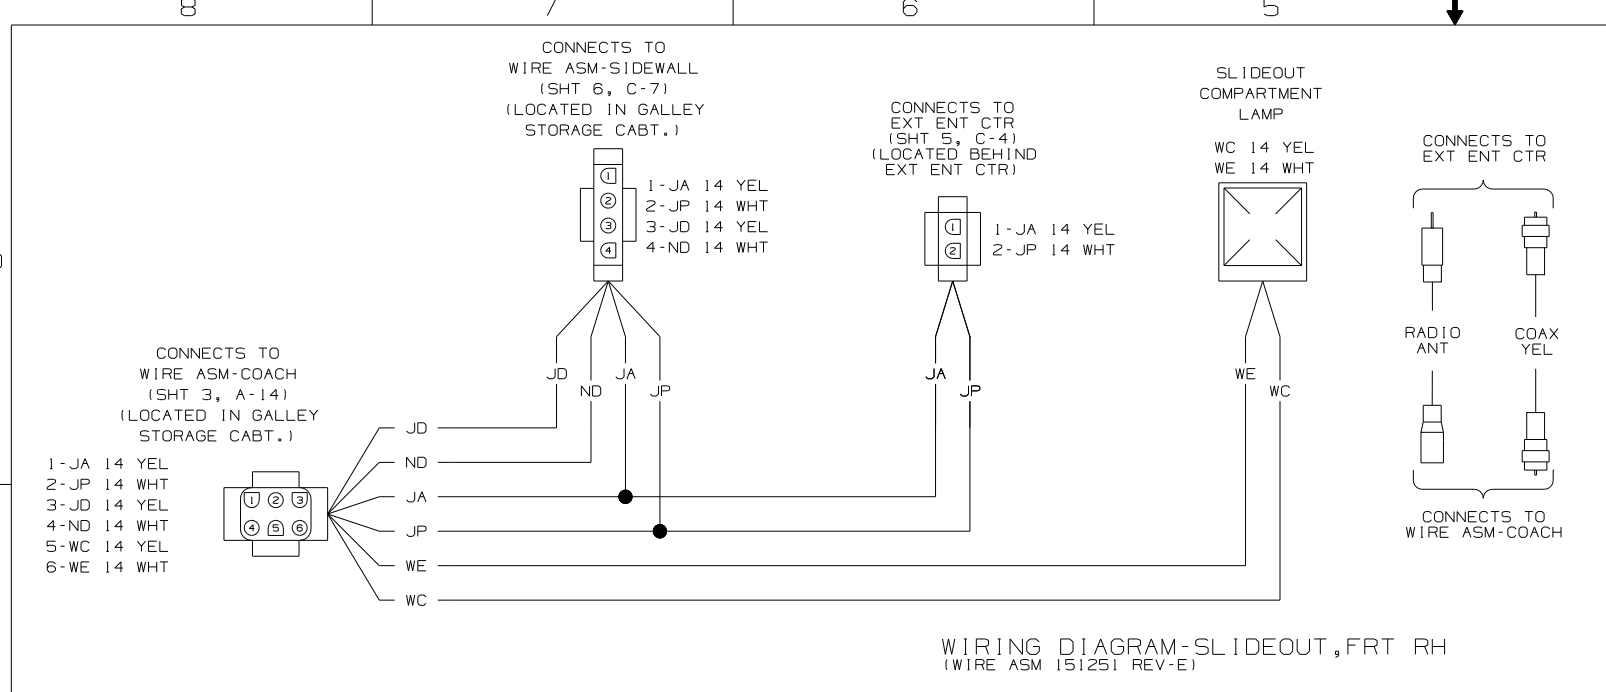


FIRST USED	06 D34A
TITLE	DO NOT SCALE DRAWING
TITLE	WIRING DIAGRAM-BODY 12V
SHEET 6	PART NO 154231

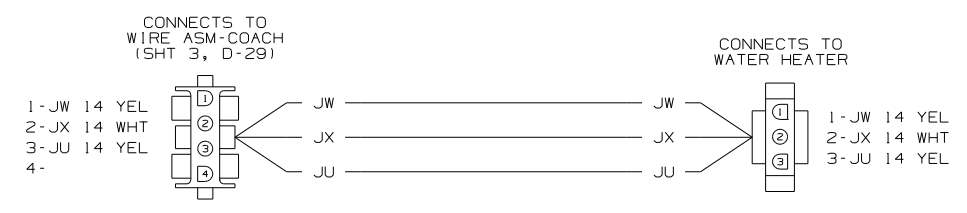

WIRING DIAGRAM-JUMPER, WTR HTR
(WIRE ASM 142263 REV-A)


- 1-LT FRT POS (WHT) 16 YEL
2-LT FRT NEG (WHT) 16 WHT
- 1-CENTER POS (GRN) 16 YEL
2-CENTER NEG (GRN) 16 WHT
- 1-RT FRT POS (RED) 16 YEL
2-RT FRT NEG (RED) 16 WHT
- 1-LT RR POS (BLU) 16 YEL
2-LT RR NEG (BLU) 16 WHT
- 1-RT RR POS (GRY) 16 YEL
2-RT RR NEG (GRY) 16 WHT

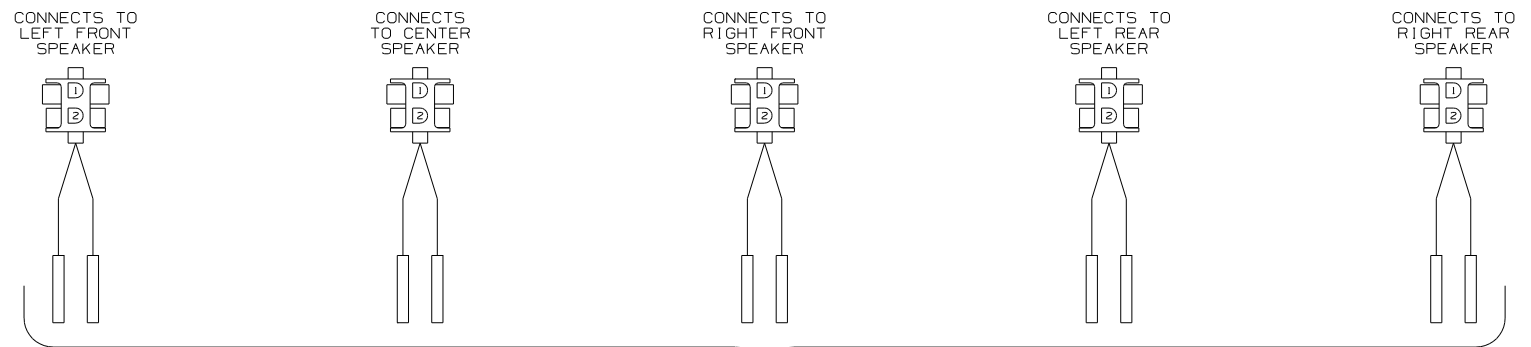


CONNECTS TO
SPEAKER OUTPUTS
ON HOME THEATER
AMPLIFIER

- RT FRT POS (RED) 16 YEL
- RT FRT NEG (RED) 16 WHT
- CENTER POS (GRN) 16 YEL
- CENTER NEG (GRN) 16 WHT
- LT FRT POS (WHT) 16 YEL
- LT FRT NEG (WHT) 16 WHT
- LT RR POS (BLU) 16 YEL
- LT RR NEG (BLU) 16 WHT
- RT RR POS (GRY) 16 YEL
- RT RR NEG (GRY) 16 WHT

WIRING DIAGRAM-HOME THEATER EXTENSION
(WIRE ASM 149963-06 REV-F)

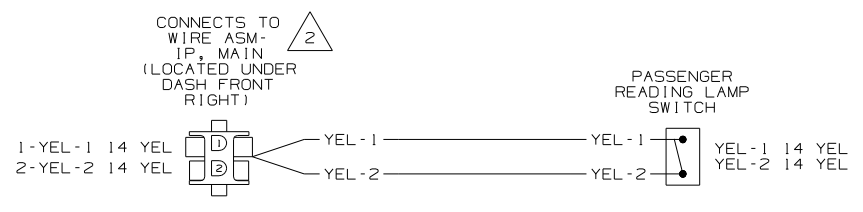

WIRING DIAGRAM-EXTENSION, 2 PIN
(WIRE ASM 147579-02 REV-A)

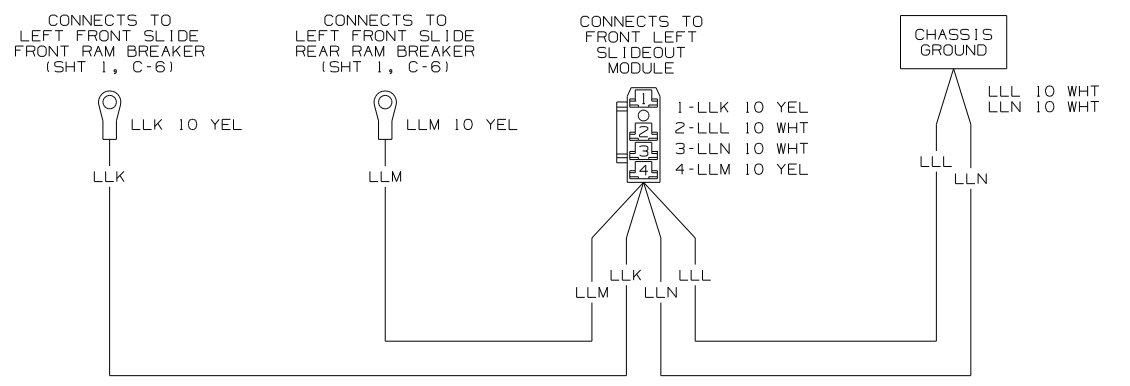

WIRING DIAGRAM-SLIDEOUT POWER
(WIRE ASM 149552-04 REV-L)

FIRST USED	06 D34A
TITLE	DO NOT SCALE DRAWING
SHEET 7	PART NO 154231
	1 5/9/2005