
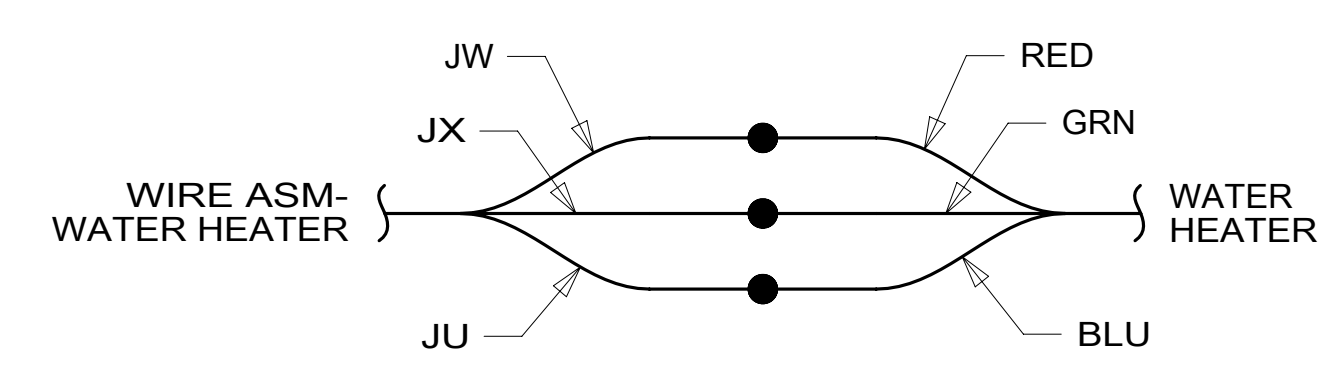
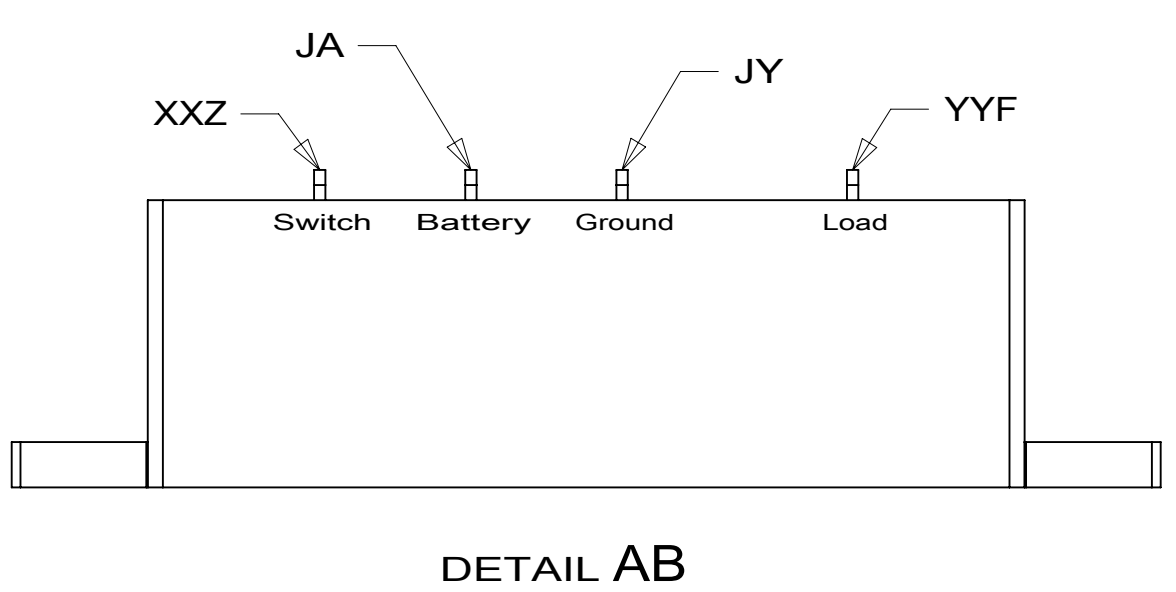


- NOTES:**
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
  2. SEE WIRING DIAGRAM-BODY, 12V FOR ADDITIONAL INFORMATION.
  3. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASS OVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIME WITH PRIMER 94.

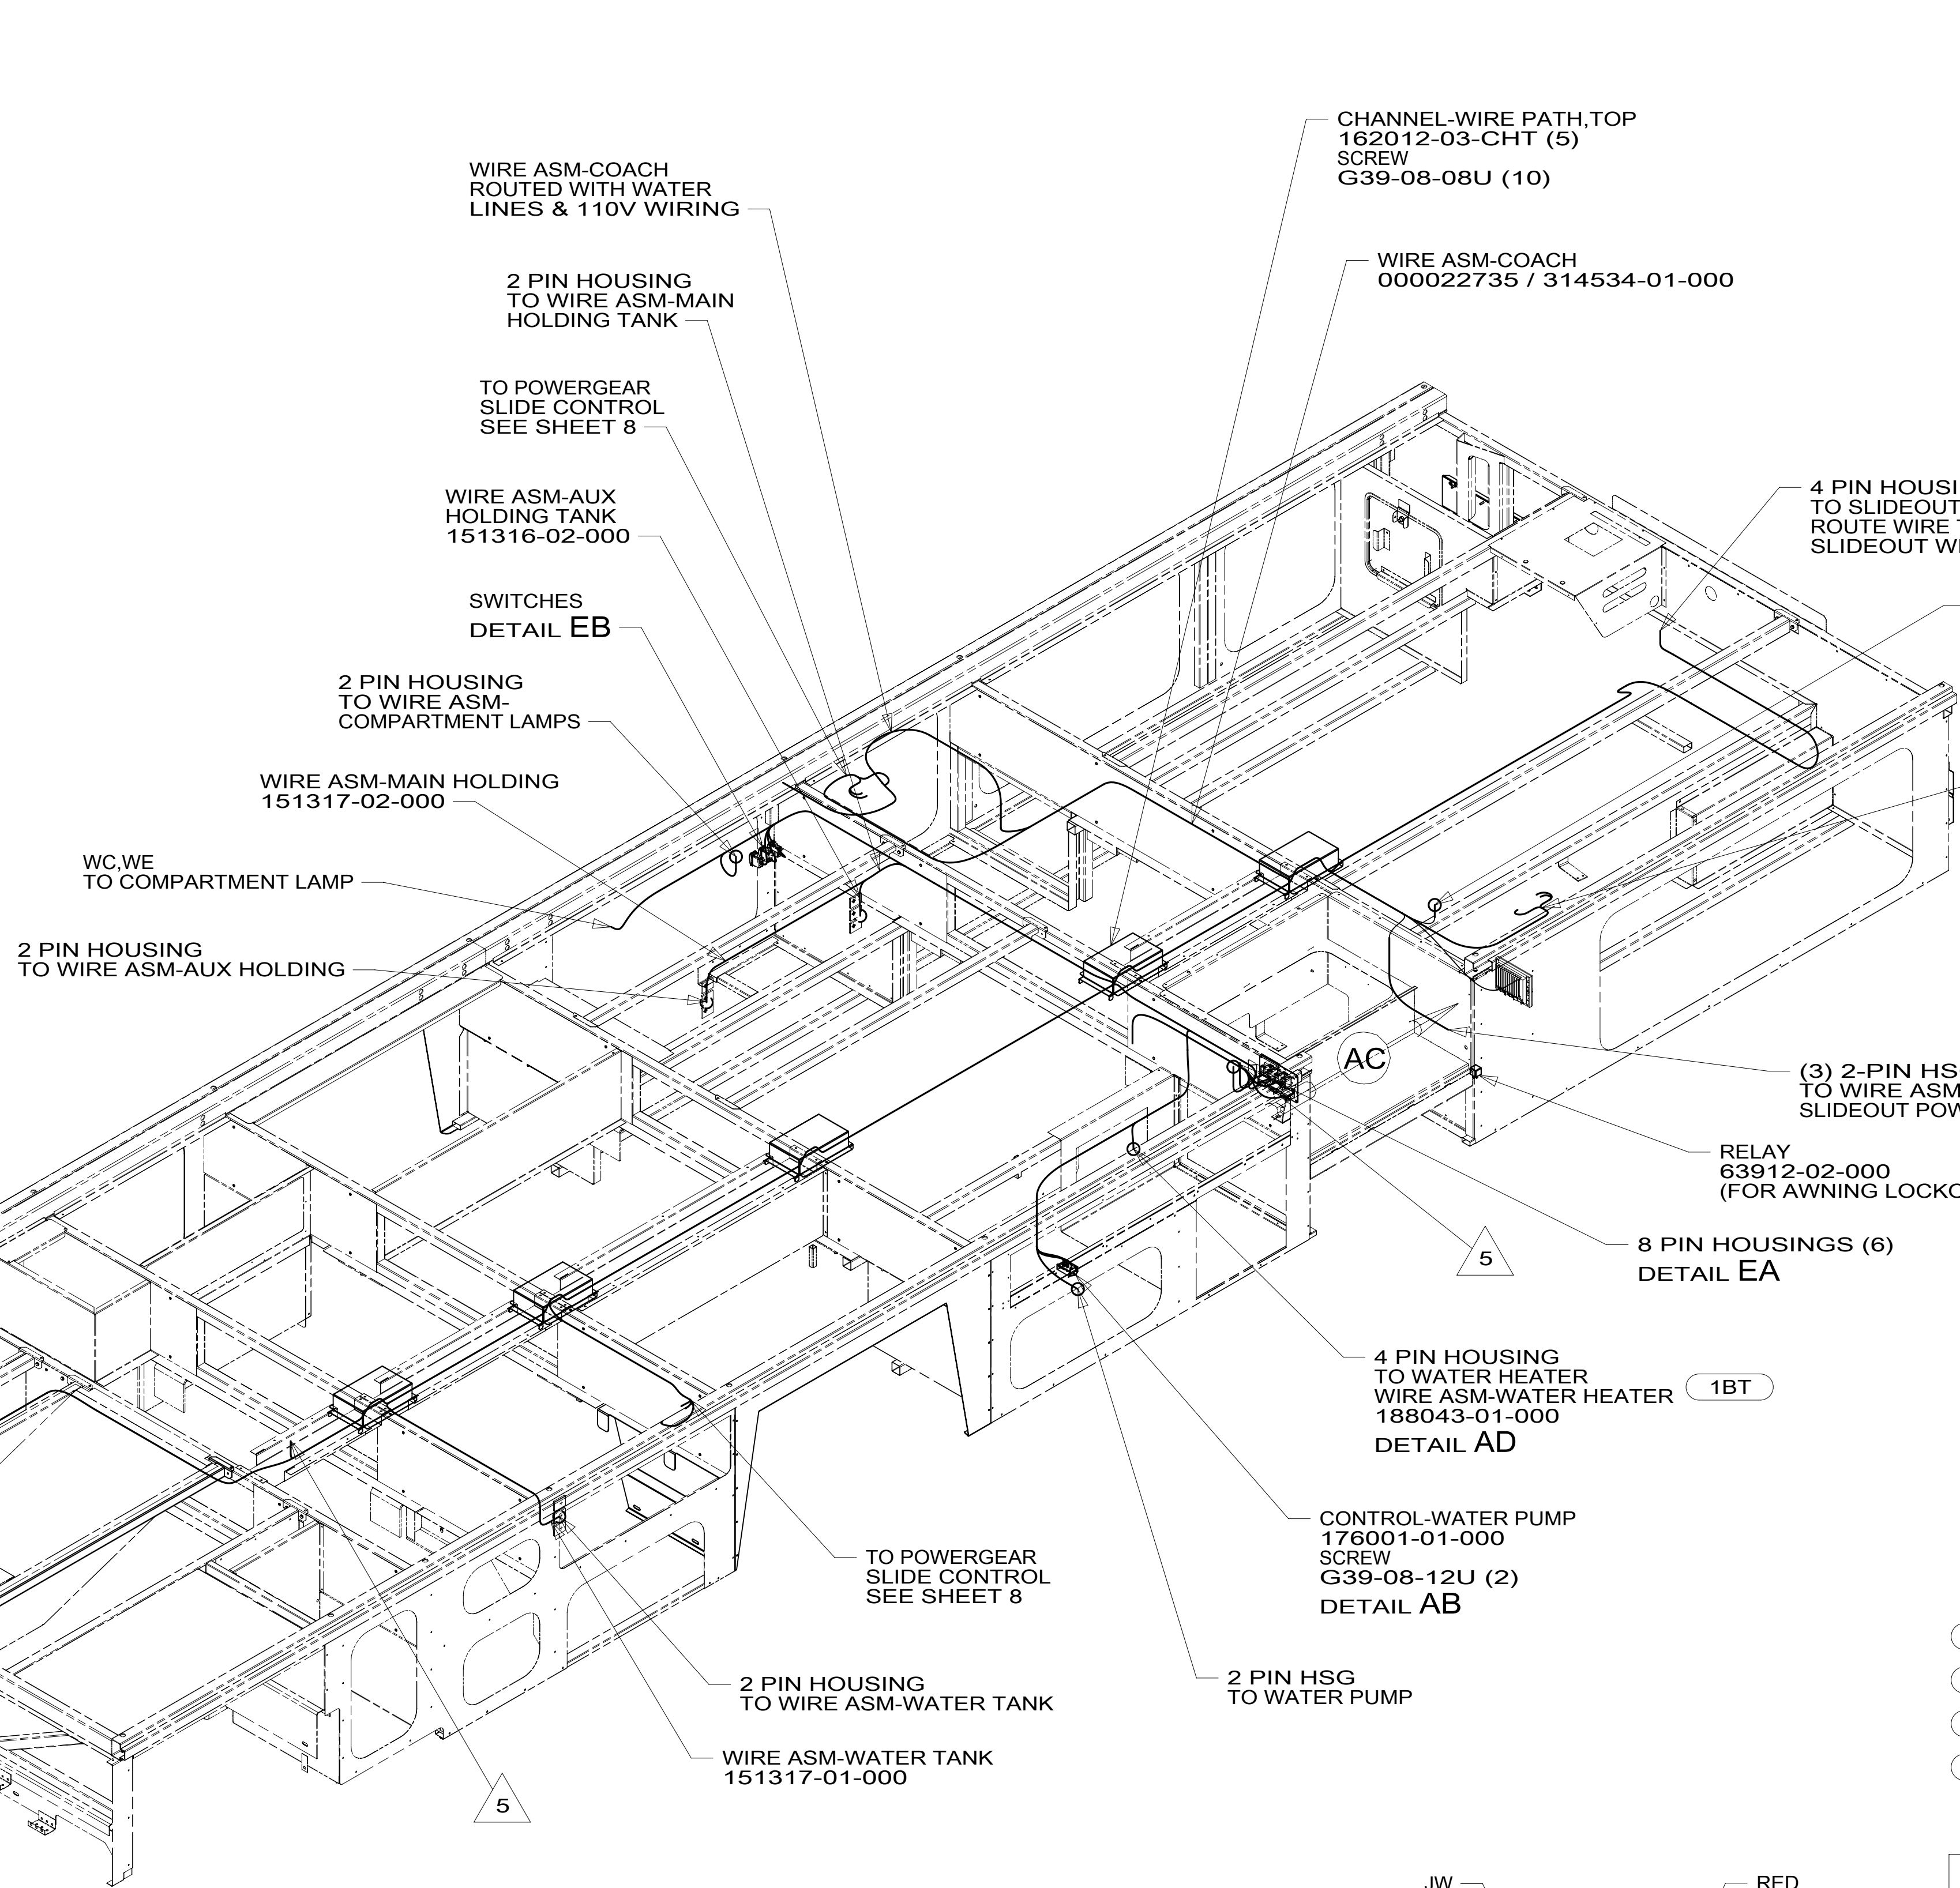


- 282 SOLAR PANEL - 100 WATT
- 1BT WATER HEATER, TANKLESS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

**WINNEBAGO**  
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.


DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		
UNSPECIFIED TOLERANCES:		MATERIAL:
WHOLE DIM (X)	3	
ONE-PLACE (X.X)	1.5	
TWO-PLACE (X.XX)	0.50	
ANGLE	1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:
		16 J35P
<b>DESCRIPTION:</b>		
<b>WIRING INSTL-BODY, 12V</b>		
SHEET:	ITEM/PART NO:	REV:
1 OF 8	000211568 / 30166601000	

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

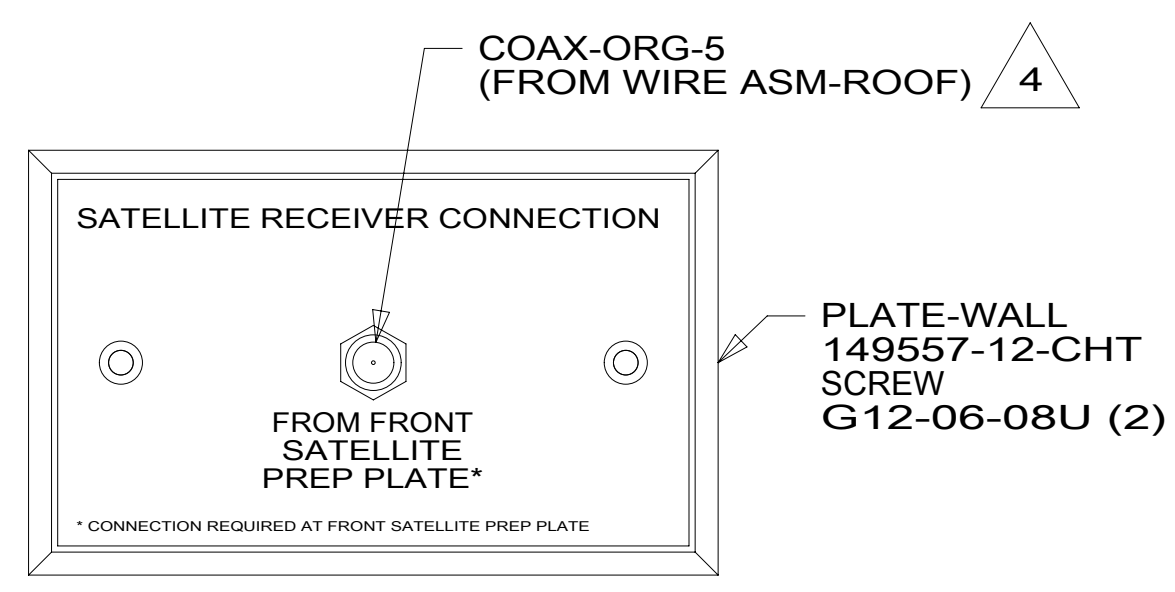

DETAIL BA

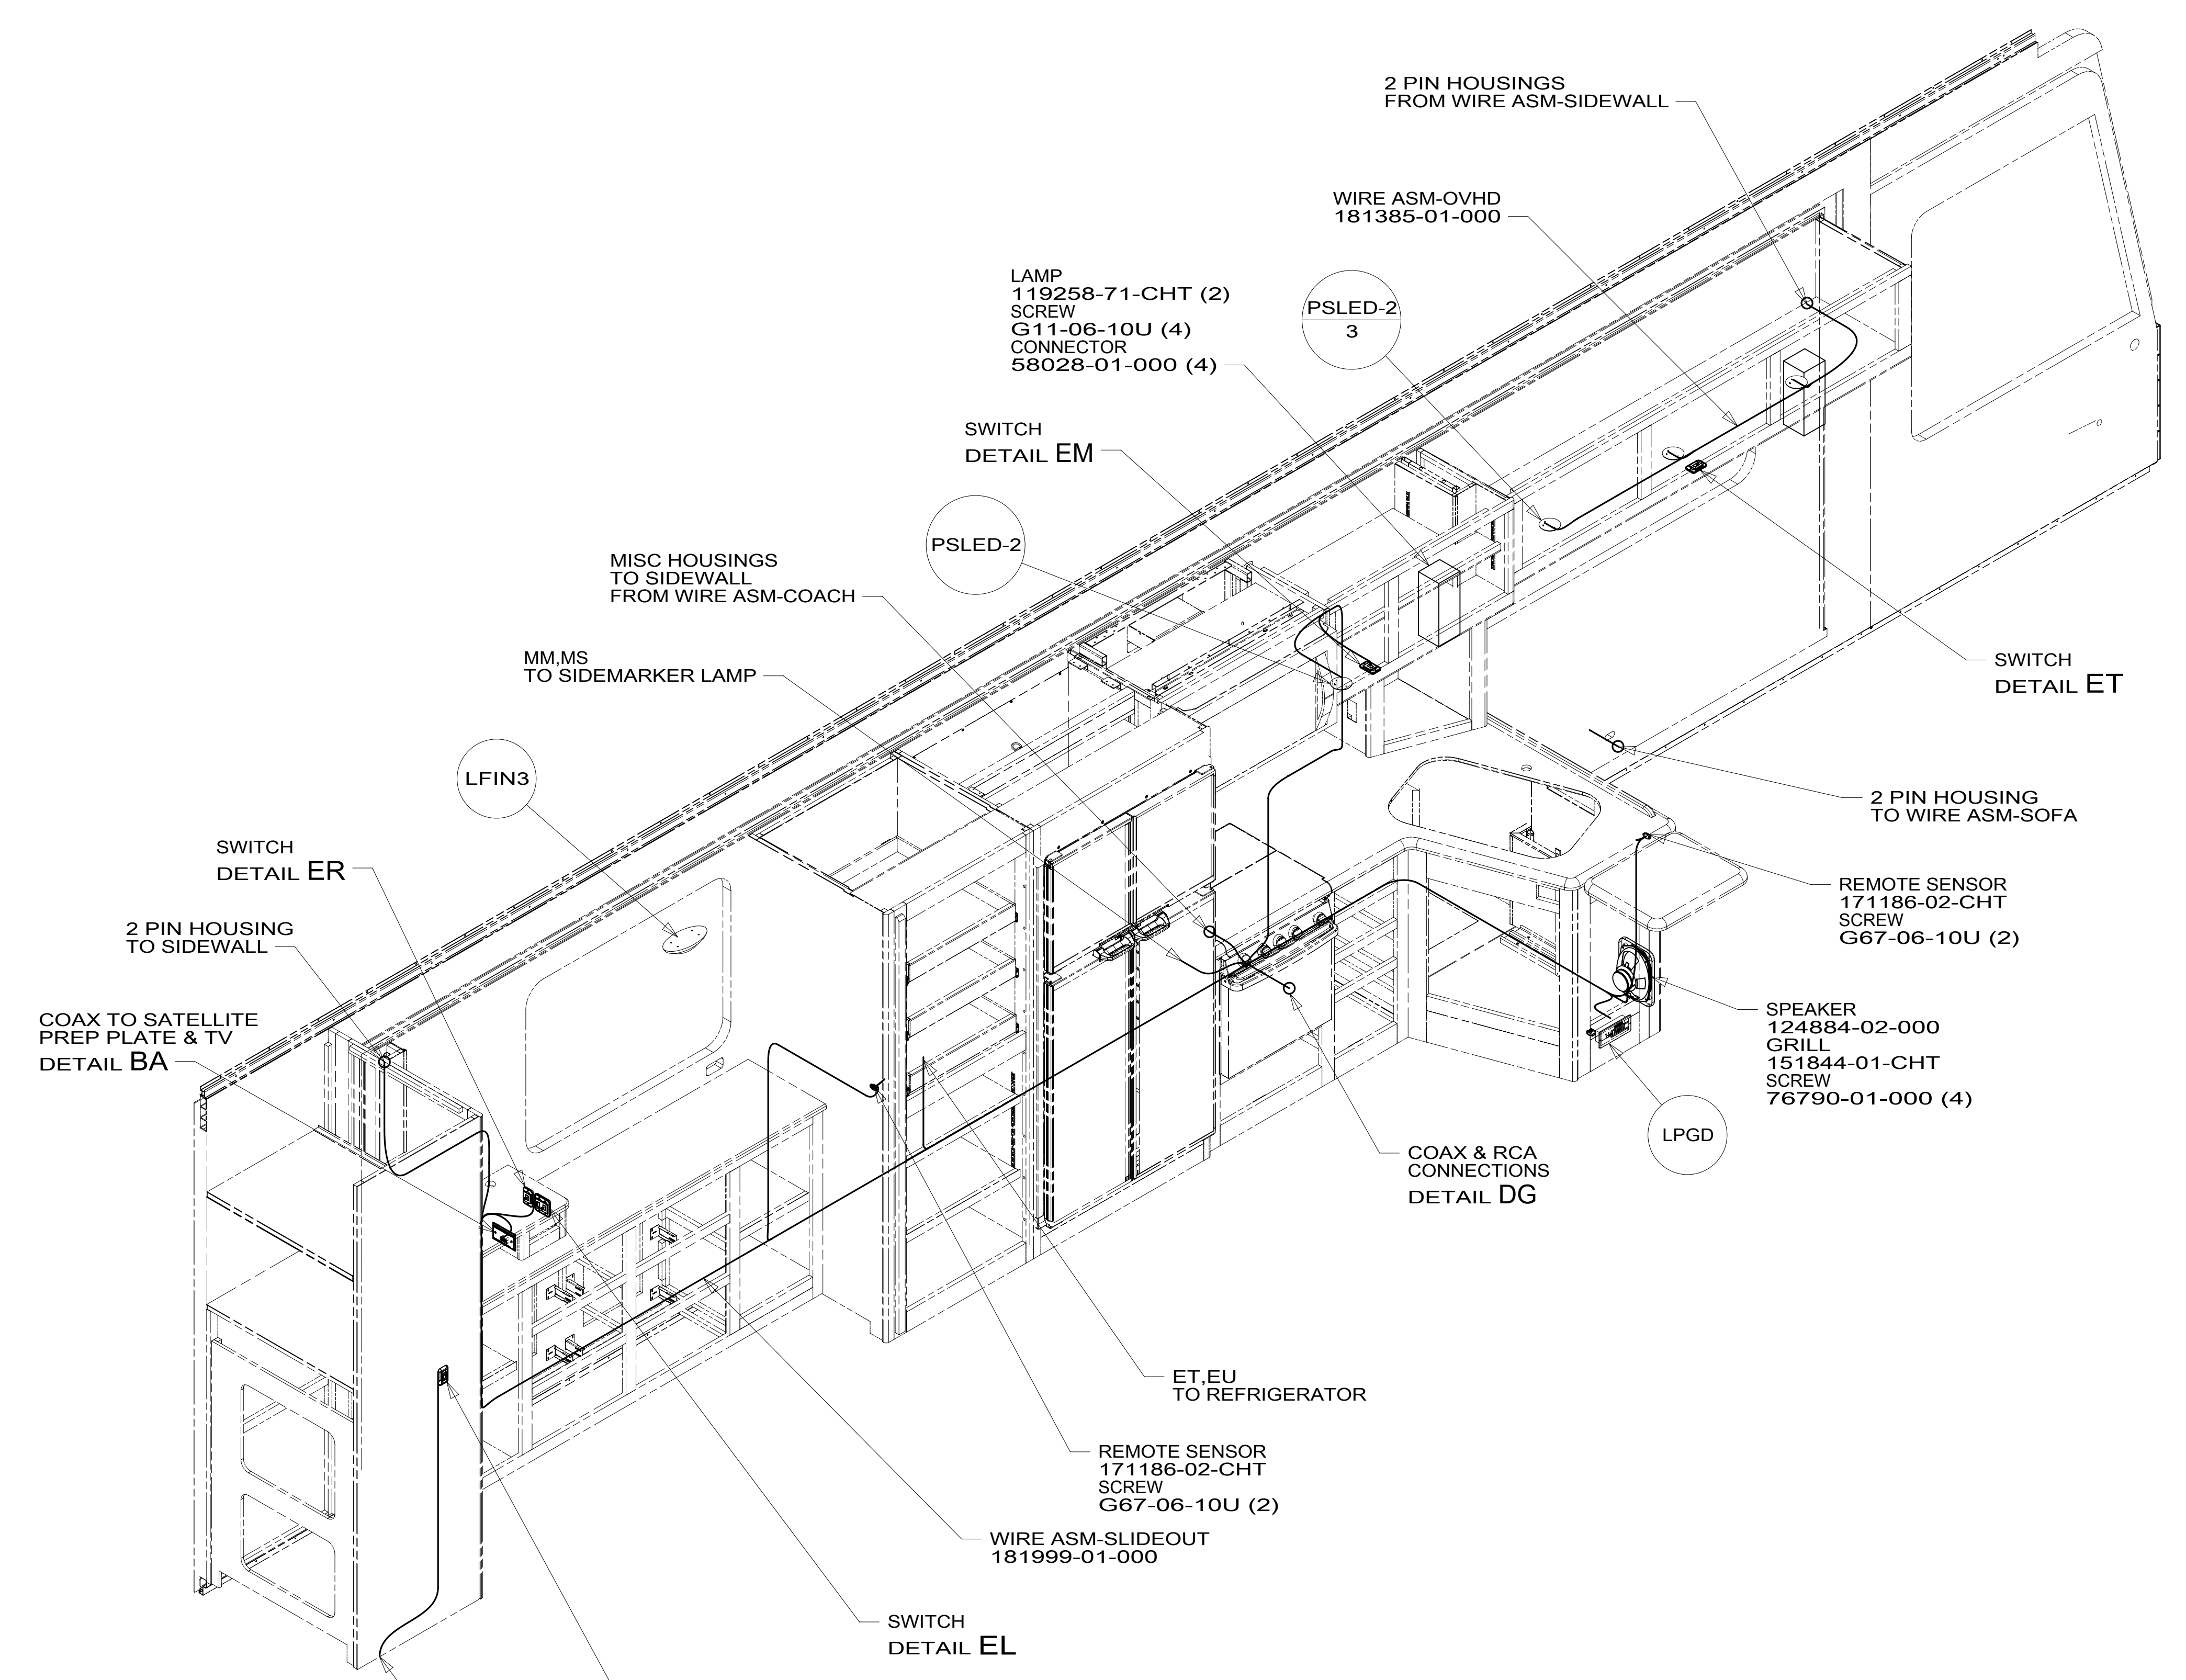

- NOTES:
- 4 CONNECTS TO REAR OF SATELLITE PREP PLATE.
  - 3 WIRE PASSES THROUGH FLOOR AT THIS POINT.
  - 2. SEE WIRING DIAGRAM-BODY, 12V FOR ADDITIONAL INFORMATION.
  - 1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.


265 CODES/STANDARDS-CSA/CMVSS  
 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	1B1 265	
<b>WIRING INSTL-BODY, 12V</b>		
SHEET:	ITEM/PART NO:	REV
2 OF 8	000211568 / 30166601000	



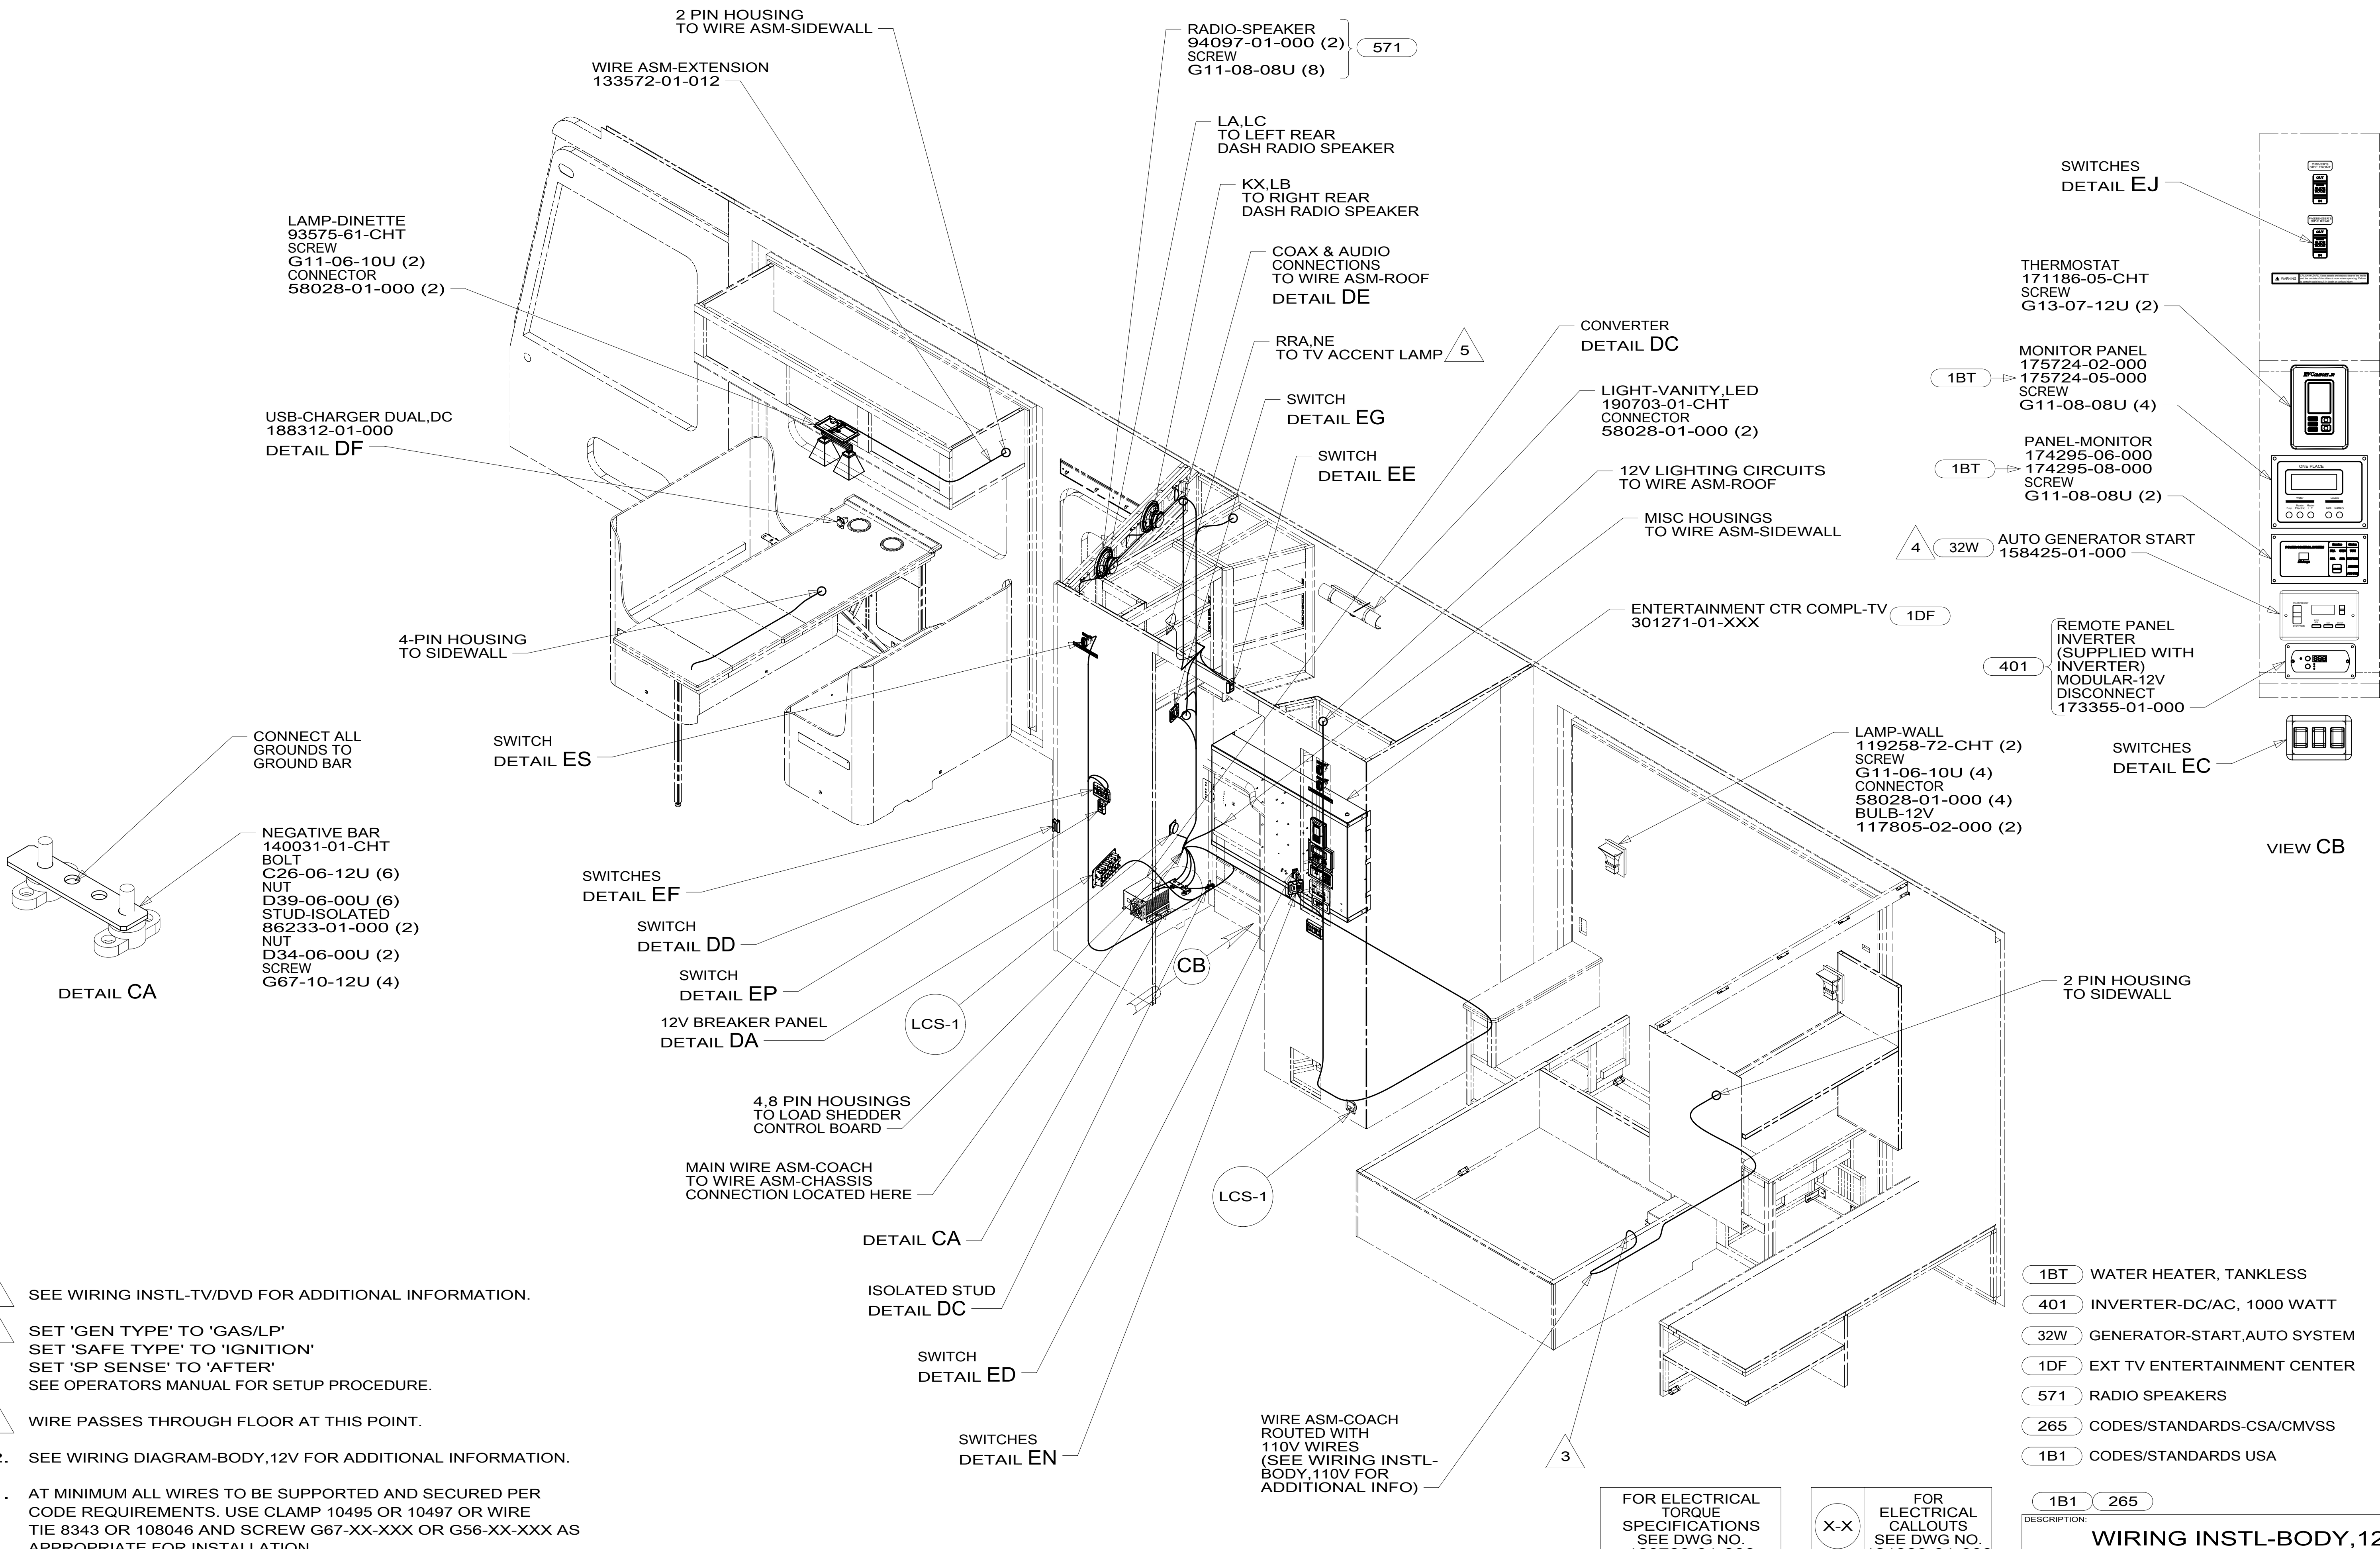

- 5 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
- 4 SET 'GEN TYPE' TO 'GAS/LP'  
SET 'SAFE TYPE' TO 'IGNITION'  
SET 'SP SENSE' TO 'AFTER'  
SEE OPERATORS MANUAL FOR SETUP PROCEDURE.
- 3 WIRE PASSES THROUGH FLOOR AT THIS POINT.
2. SEE WIRING DIAGRAM-BODY, 12V FOR ADDITIONAL INFORMATION.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

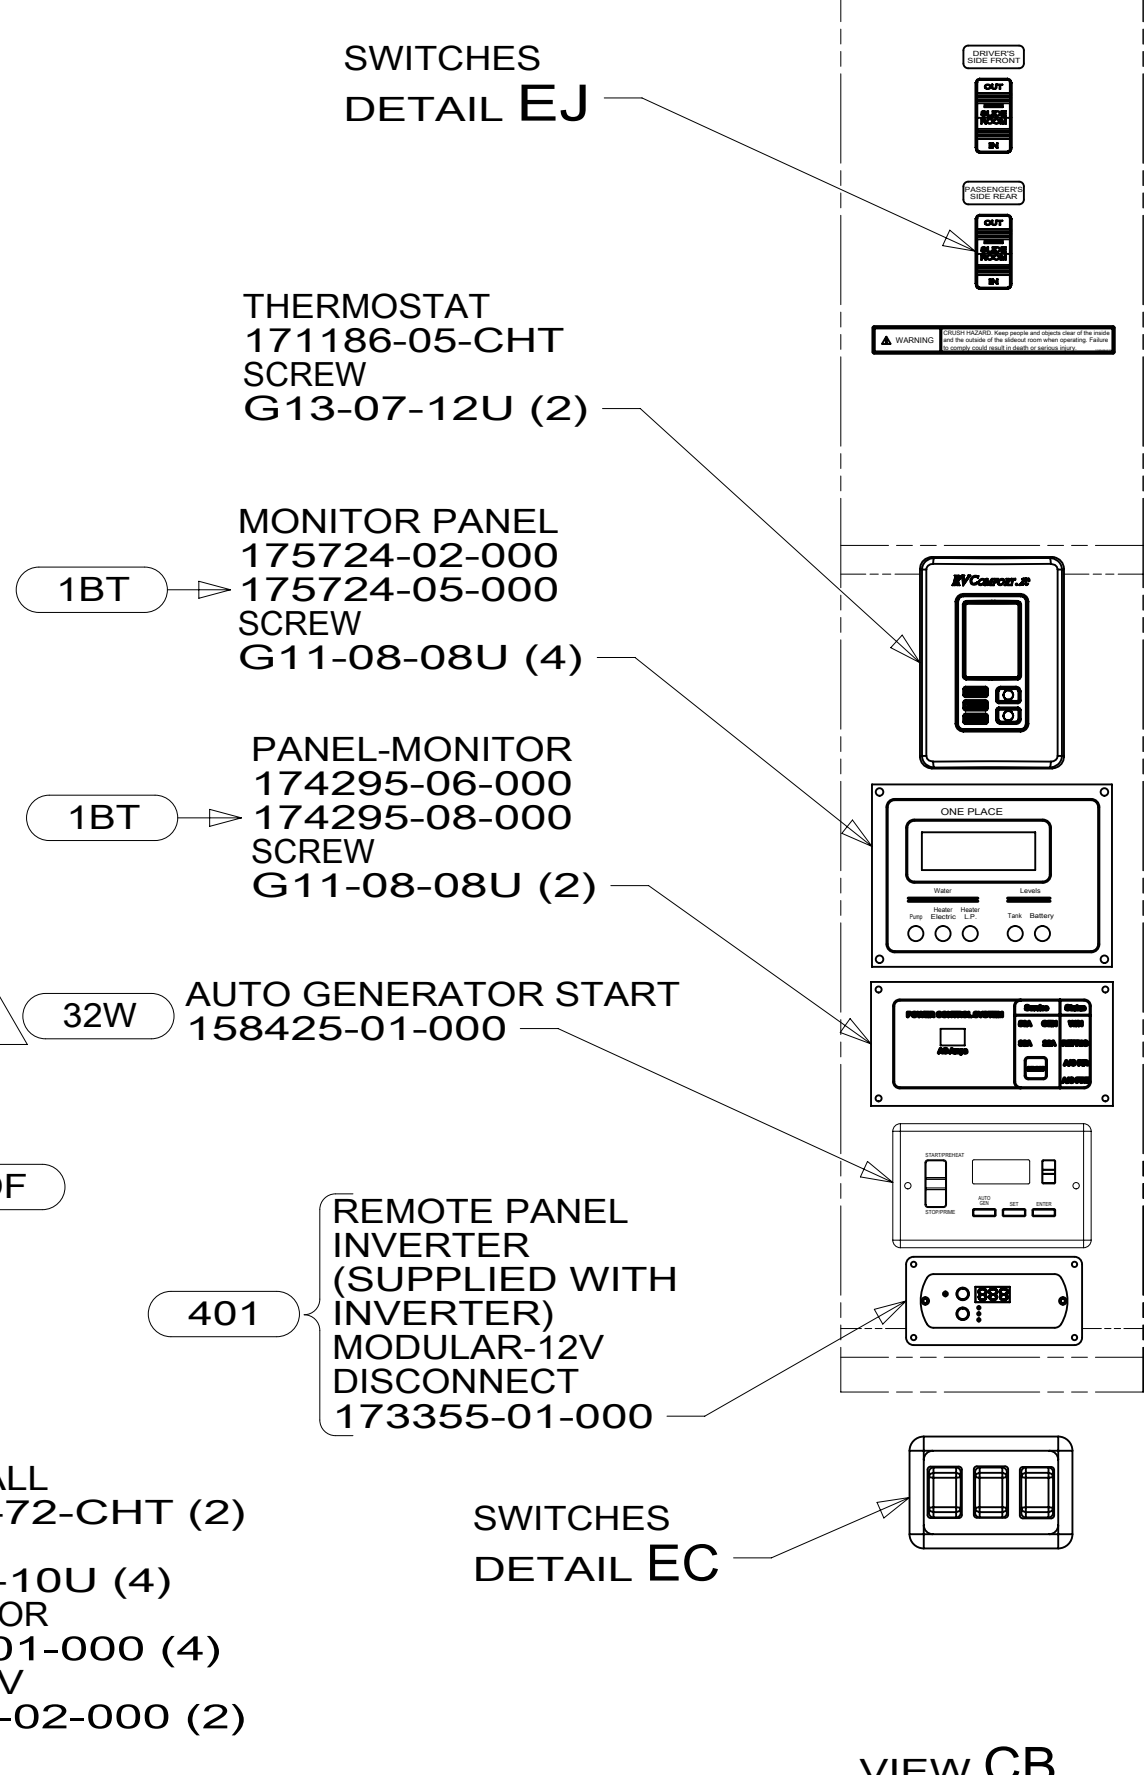

- 1BT WATER HEATER, TANKLESS
- 401 INVERTER-DC/AC, 1000 WATT
- 32W GENERATOR-START,AUTO SYSTEM
- 1DF EXT TV ENTERTAINMENT CENTER
- 571 RADIO SPEAKERS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


1B1 265

DESCRIPTION:  
**WIRING INSTL-BODY, 12V**


SHEET: 3 OF 8    ITEM/PART NO.: 000211568 / 30166601000    REV:

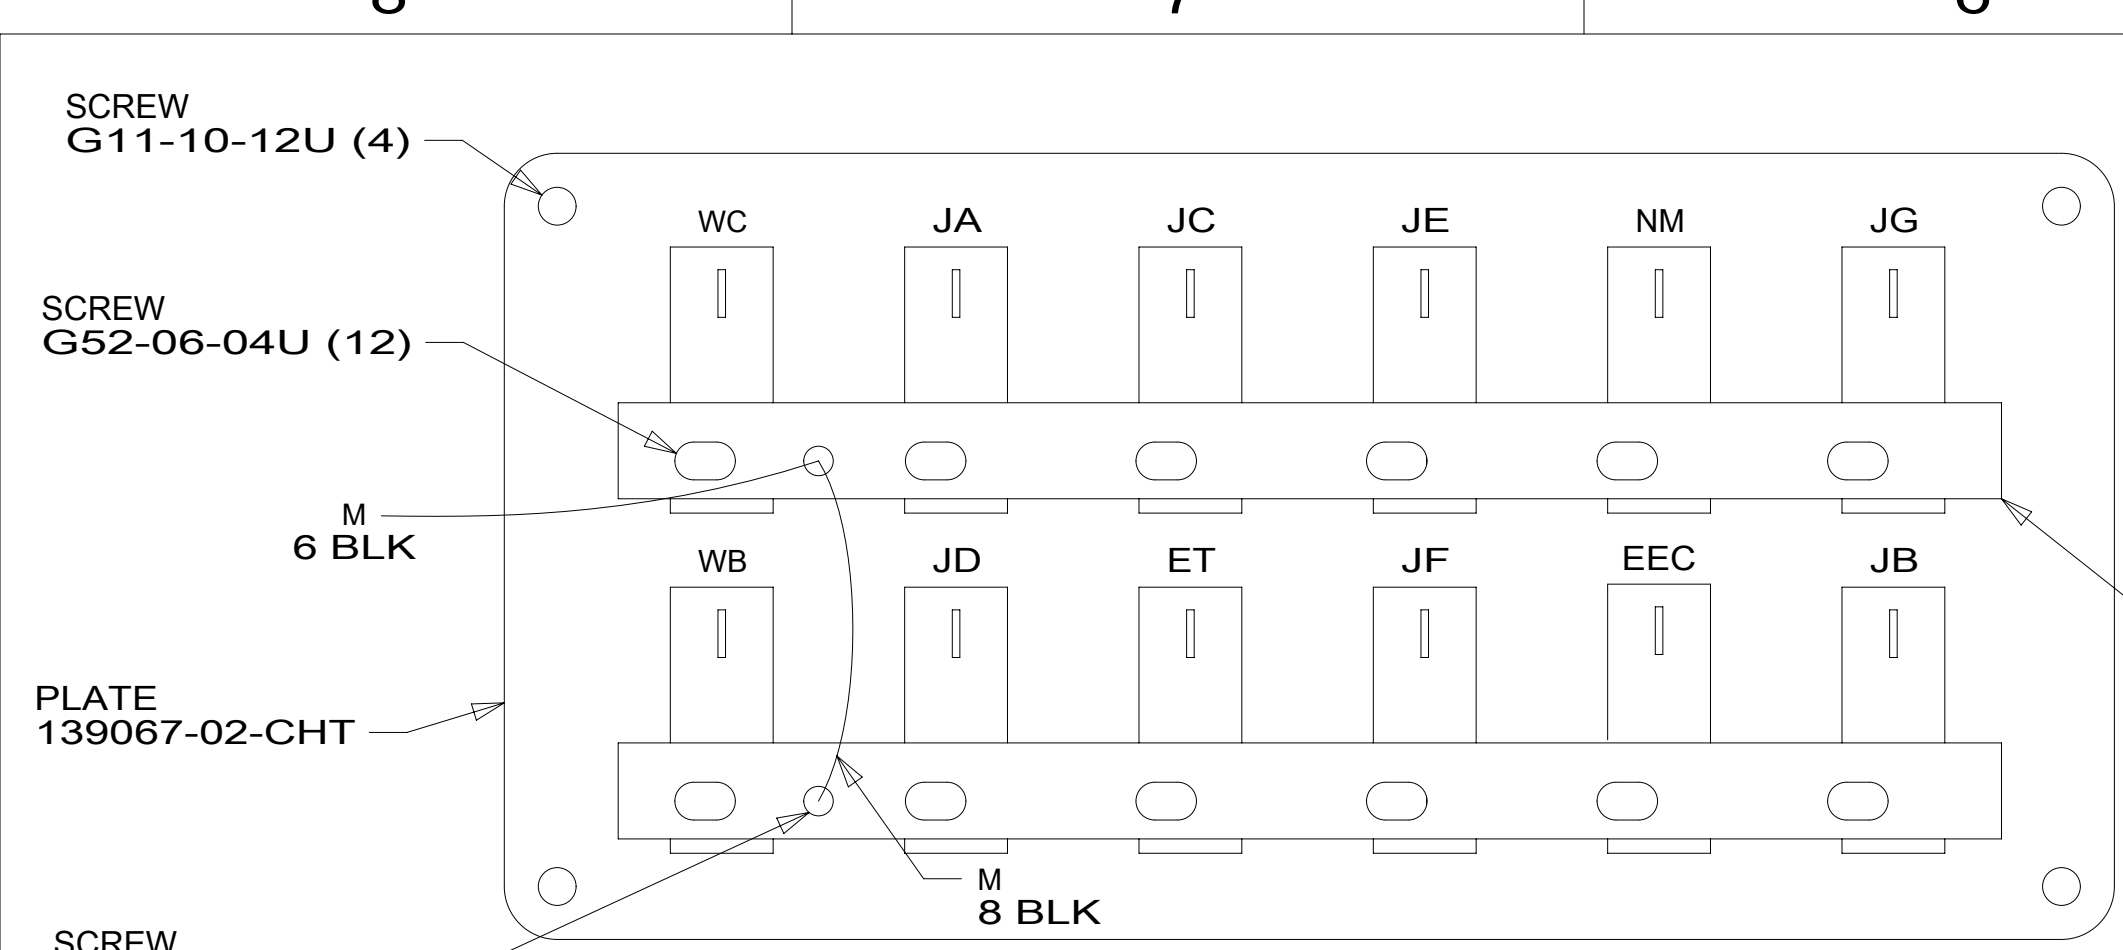


DETAIL DA  
(BACK VIEW)

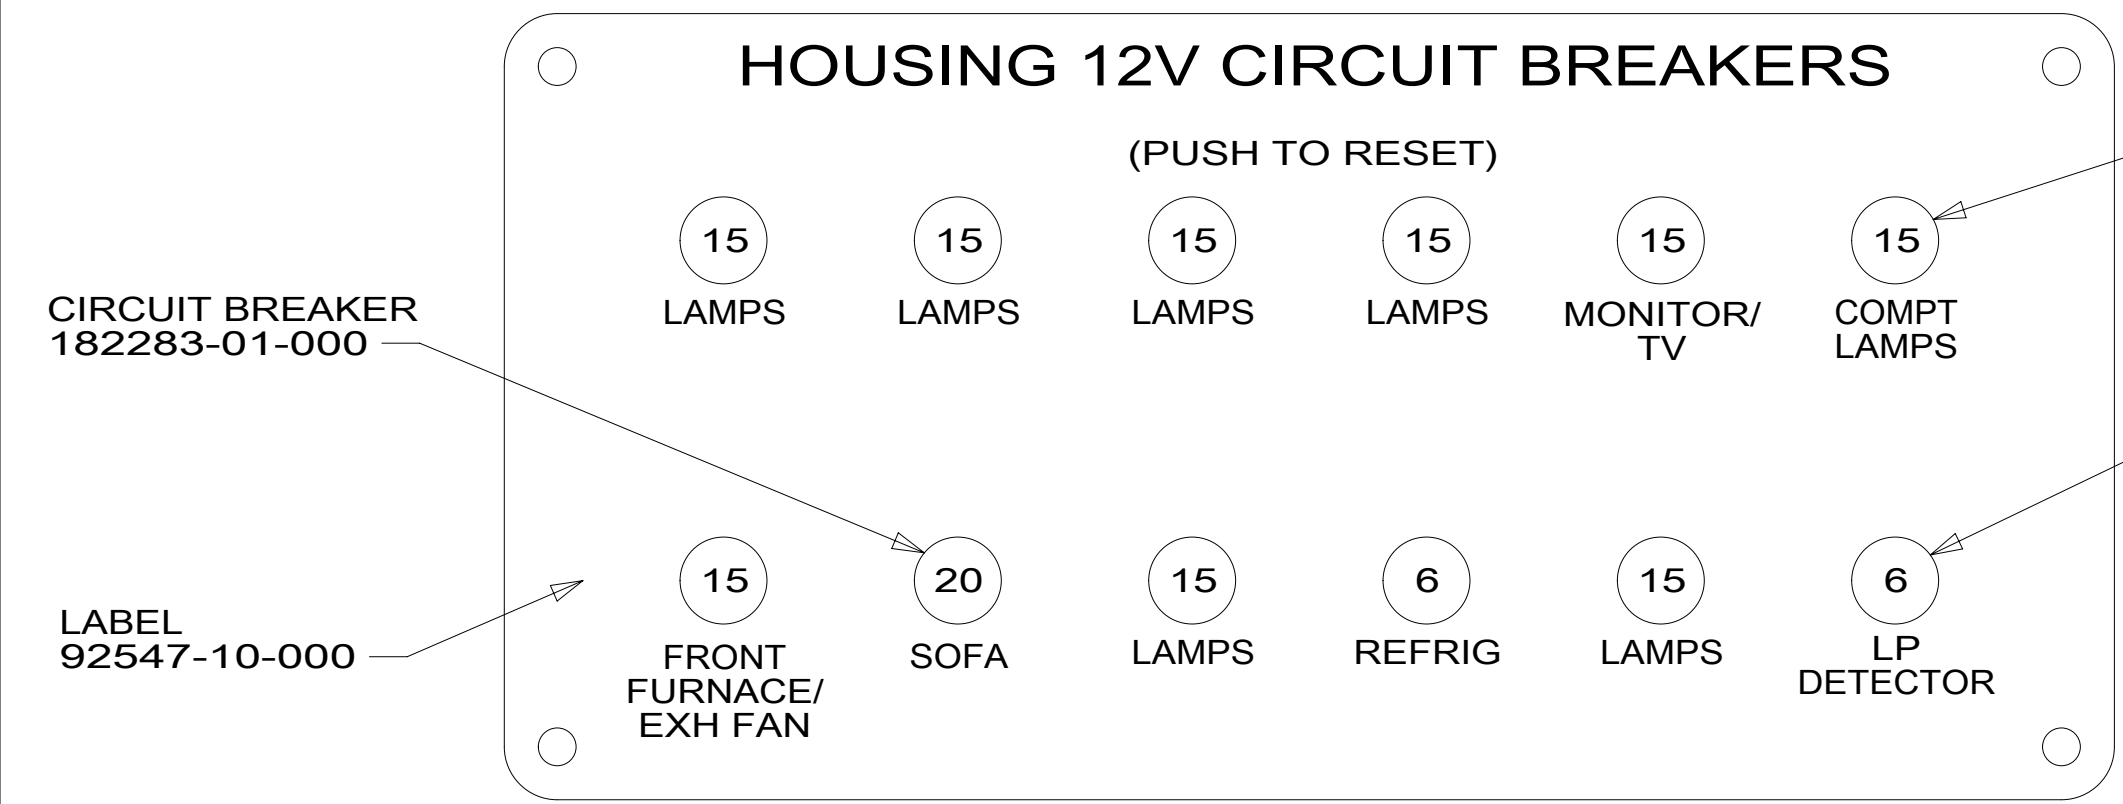


DETAIL DA  
(FRONT VIEW)

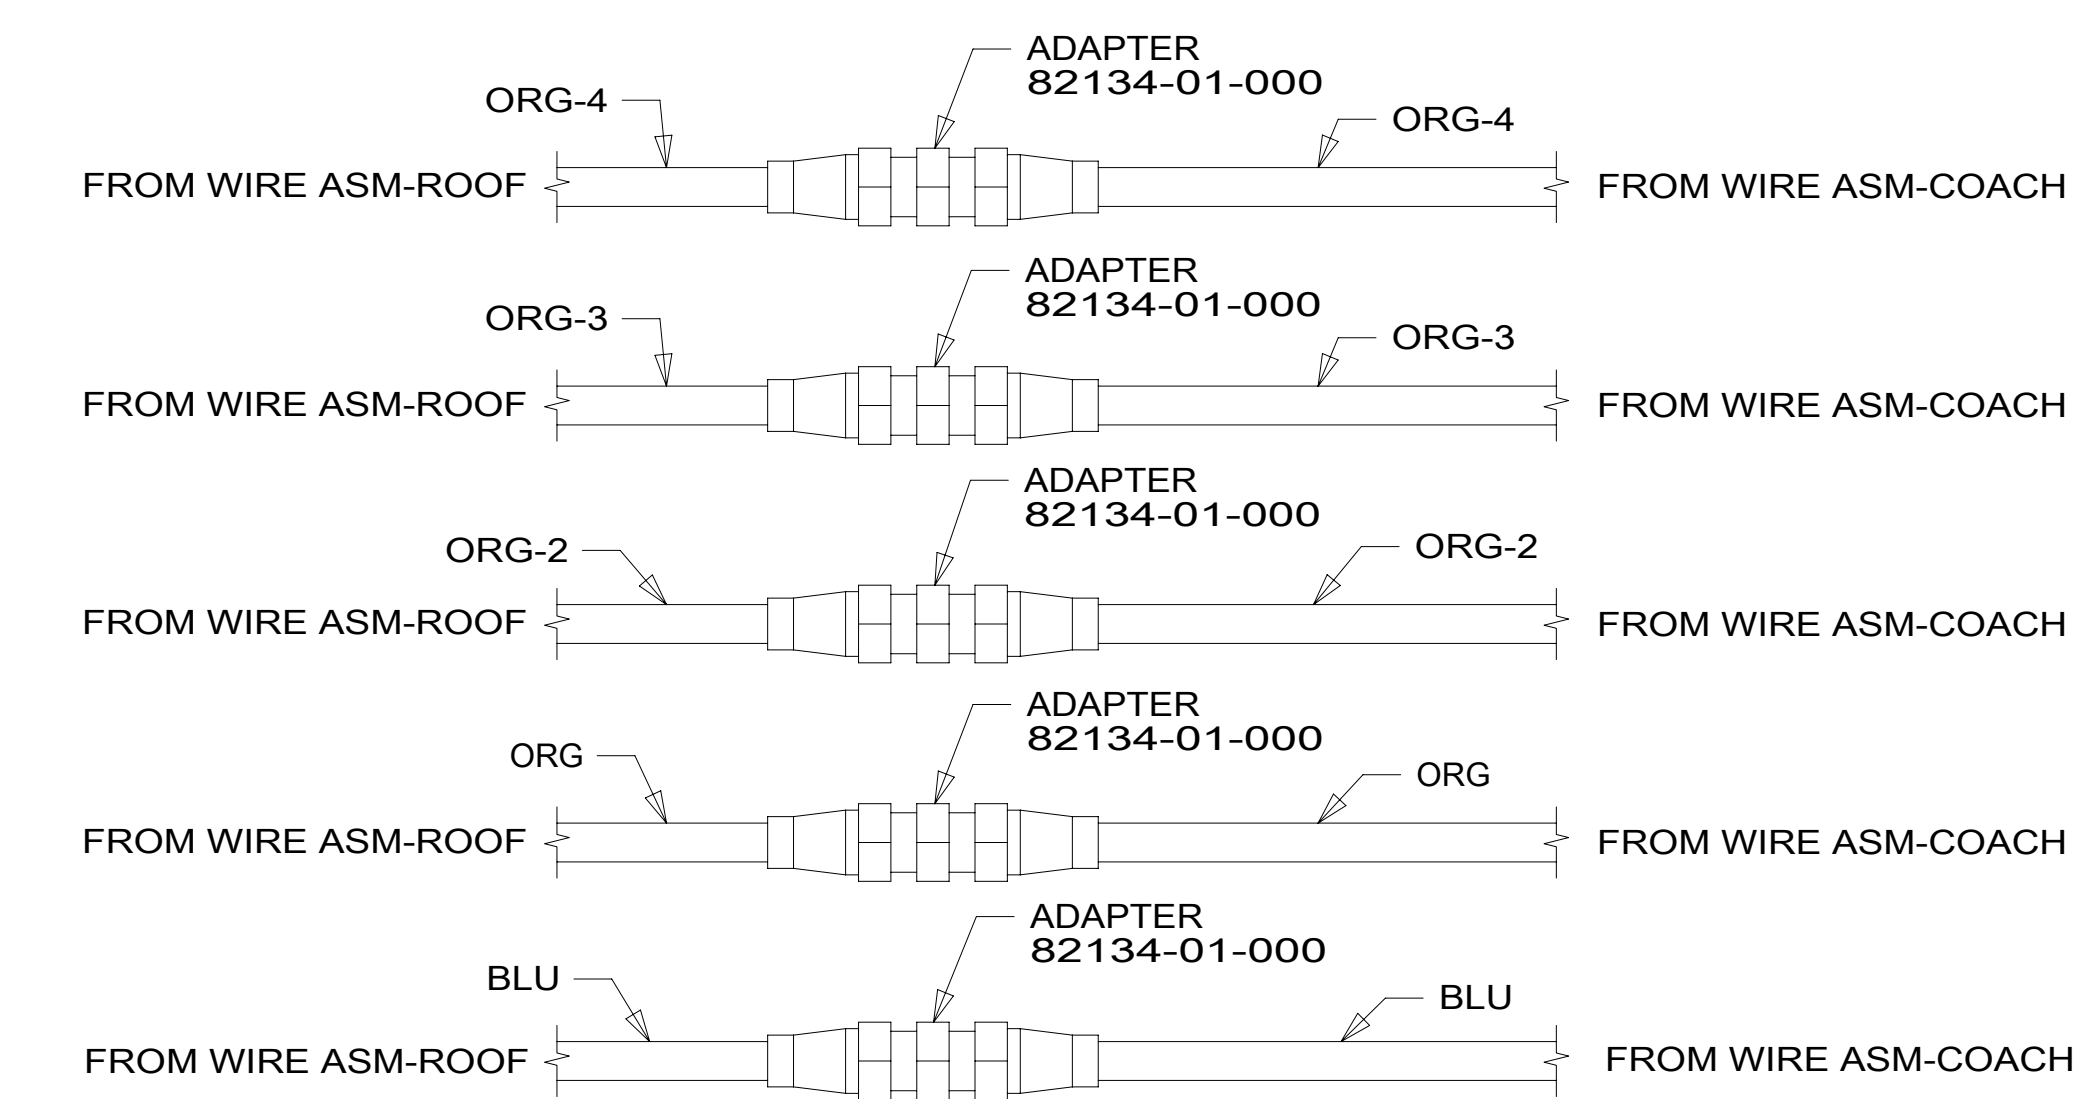


DETAIL DE

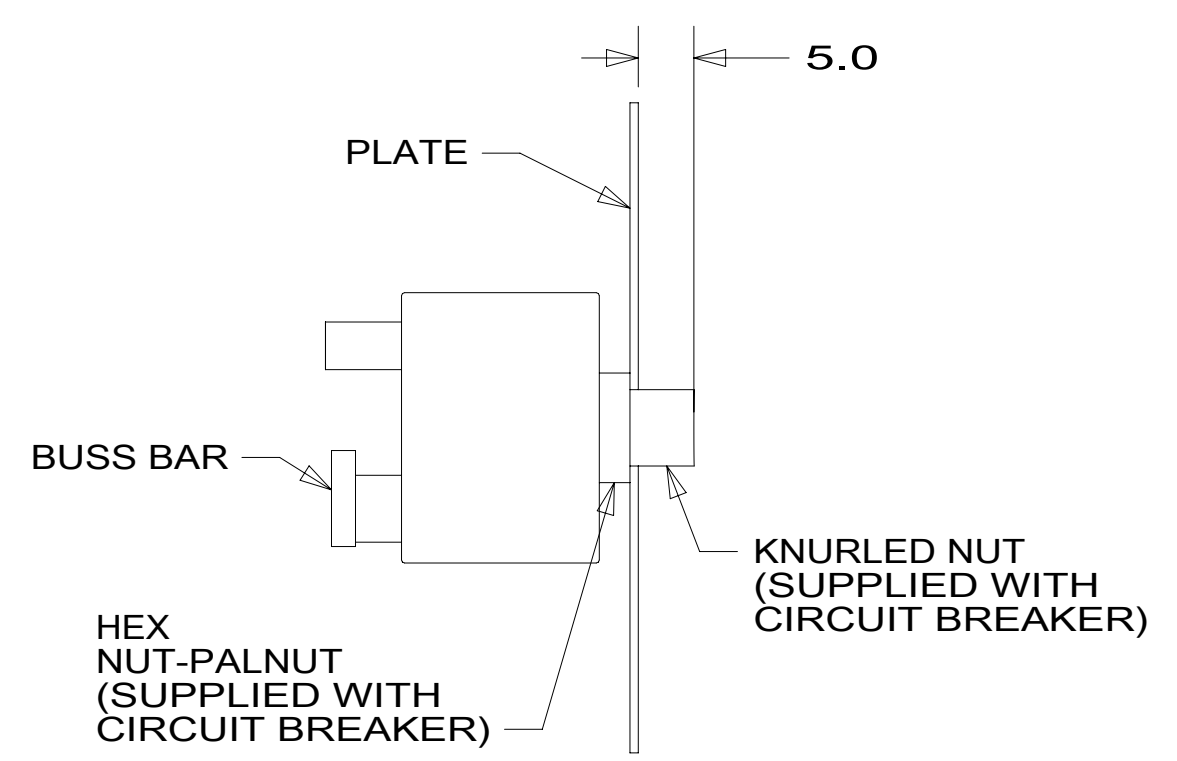


DETAIL DB-DB

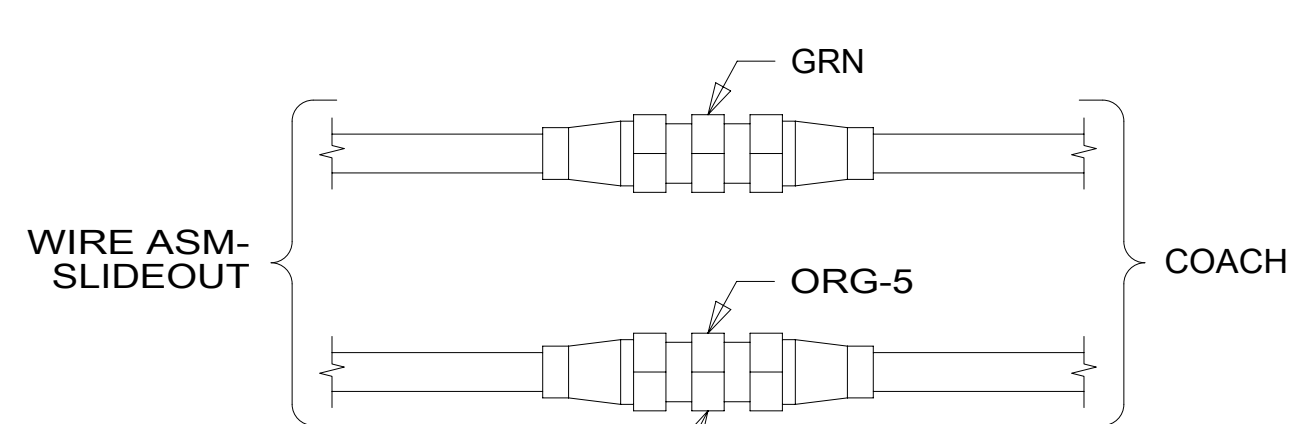


DETAIL DG

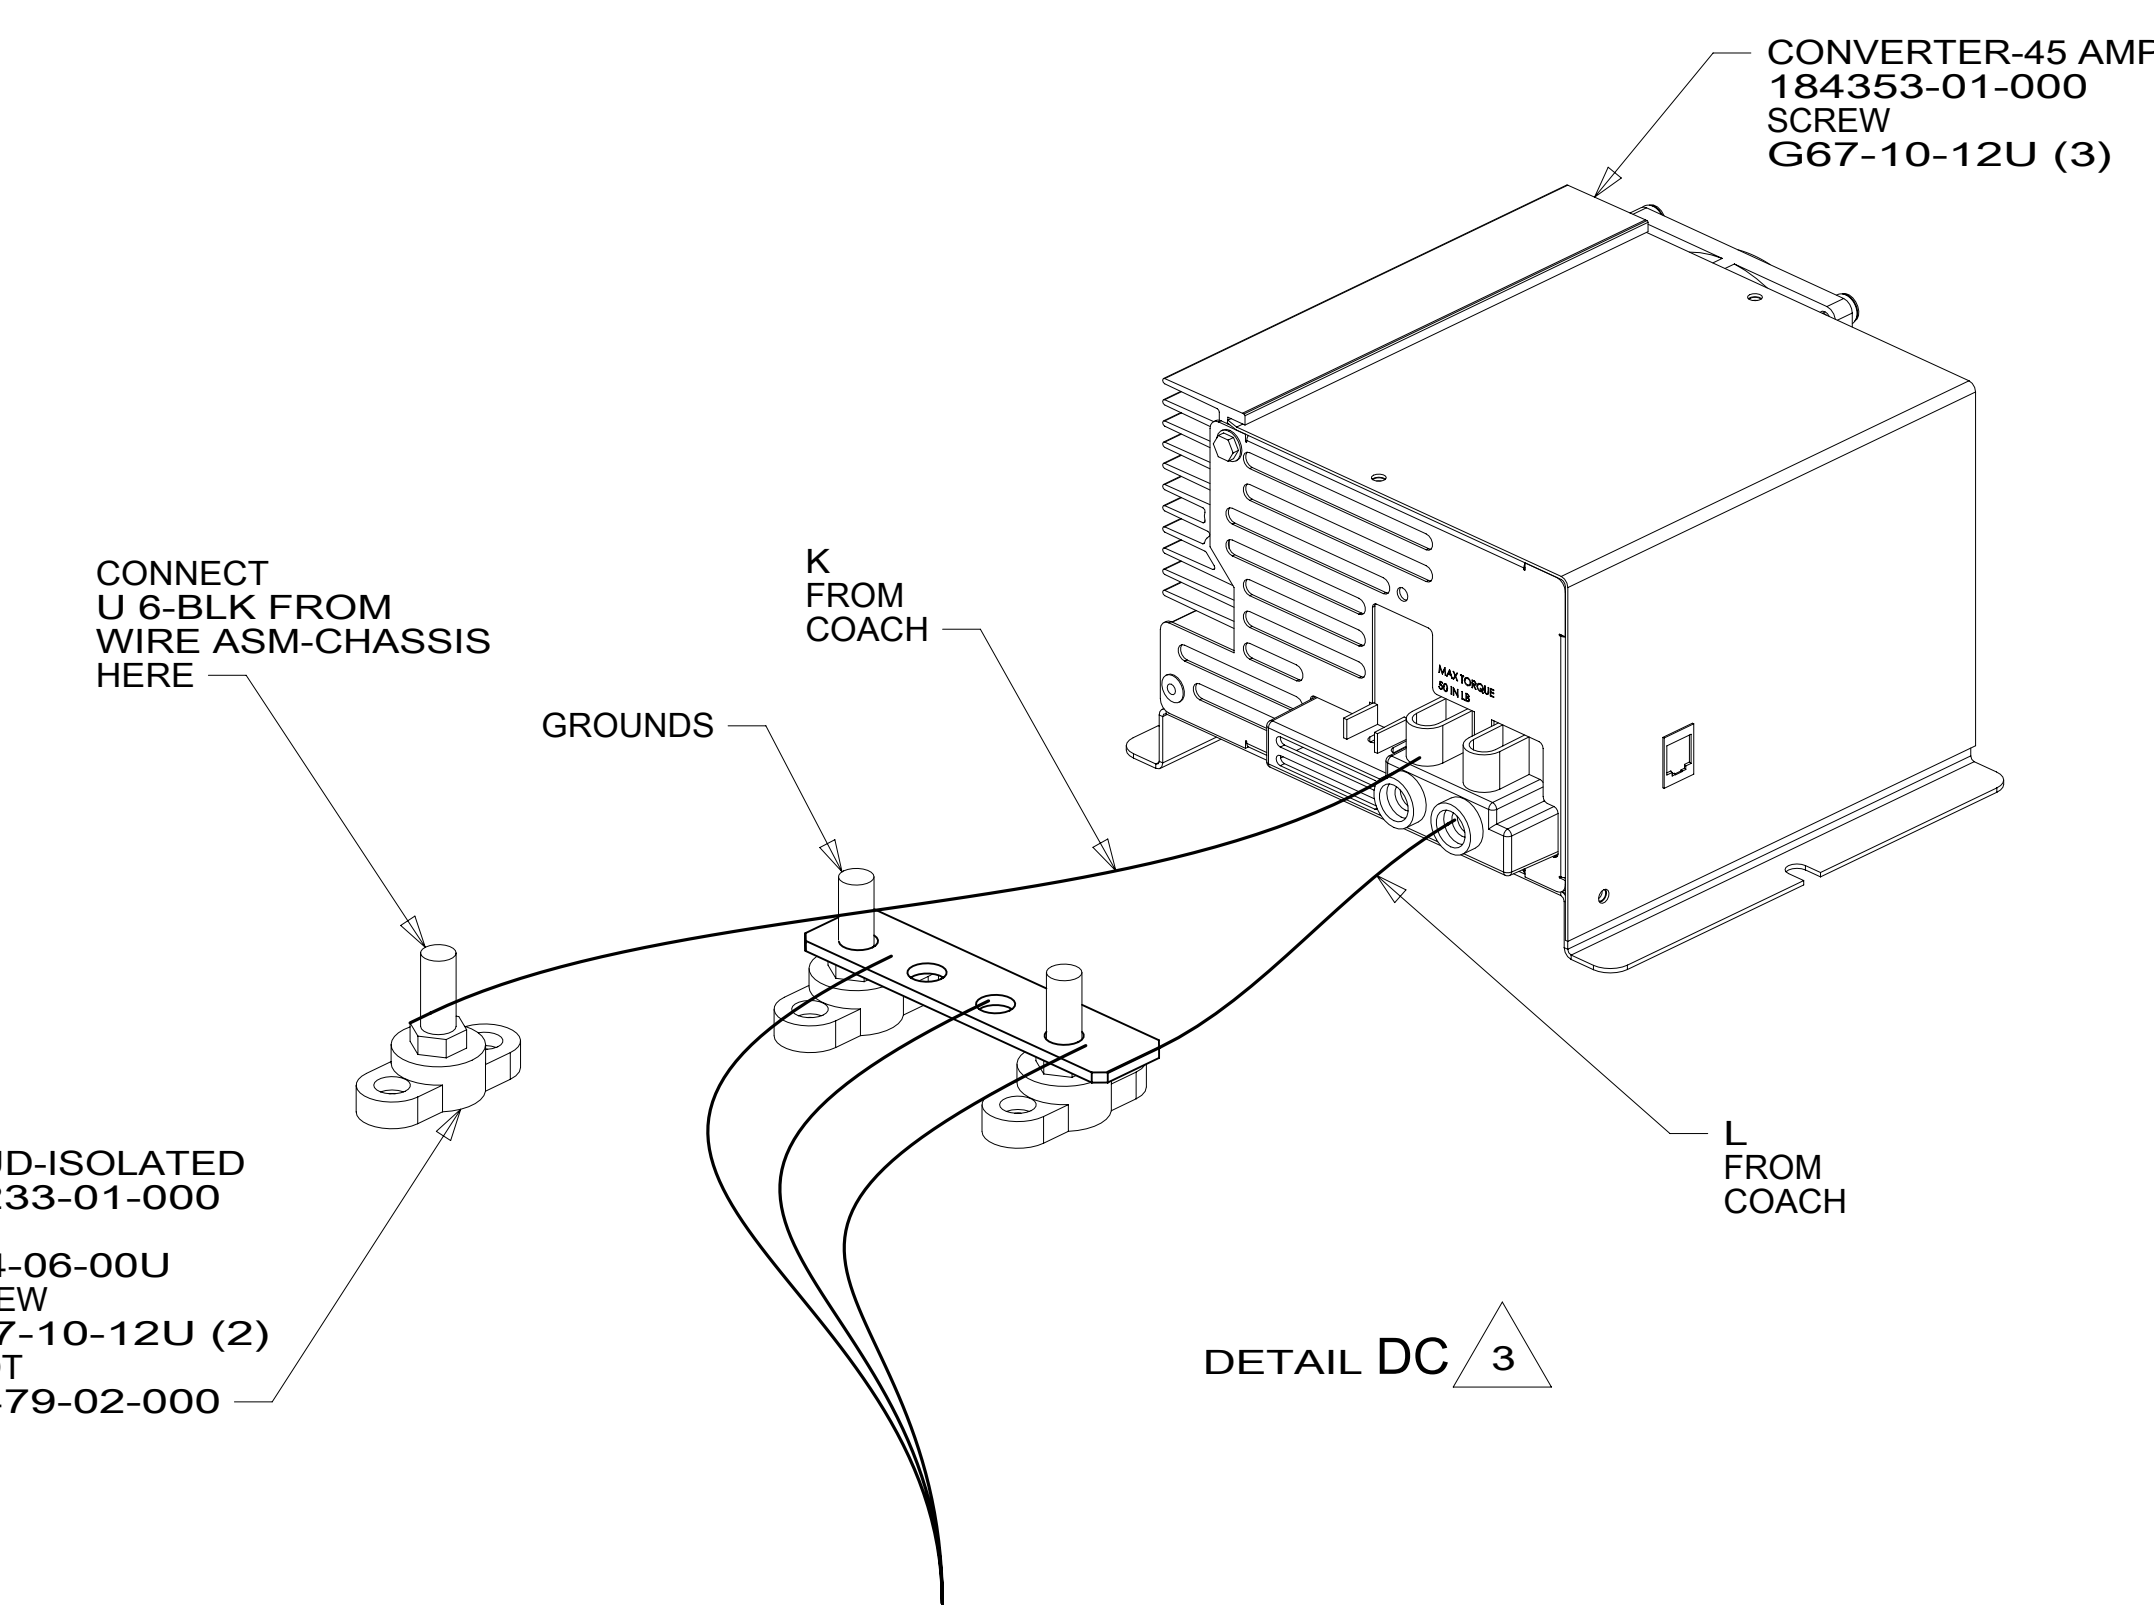

DETAIL DC 3

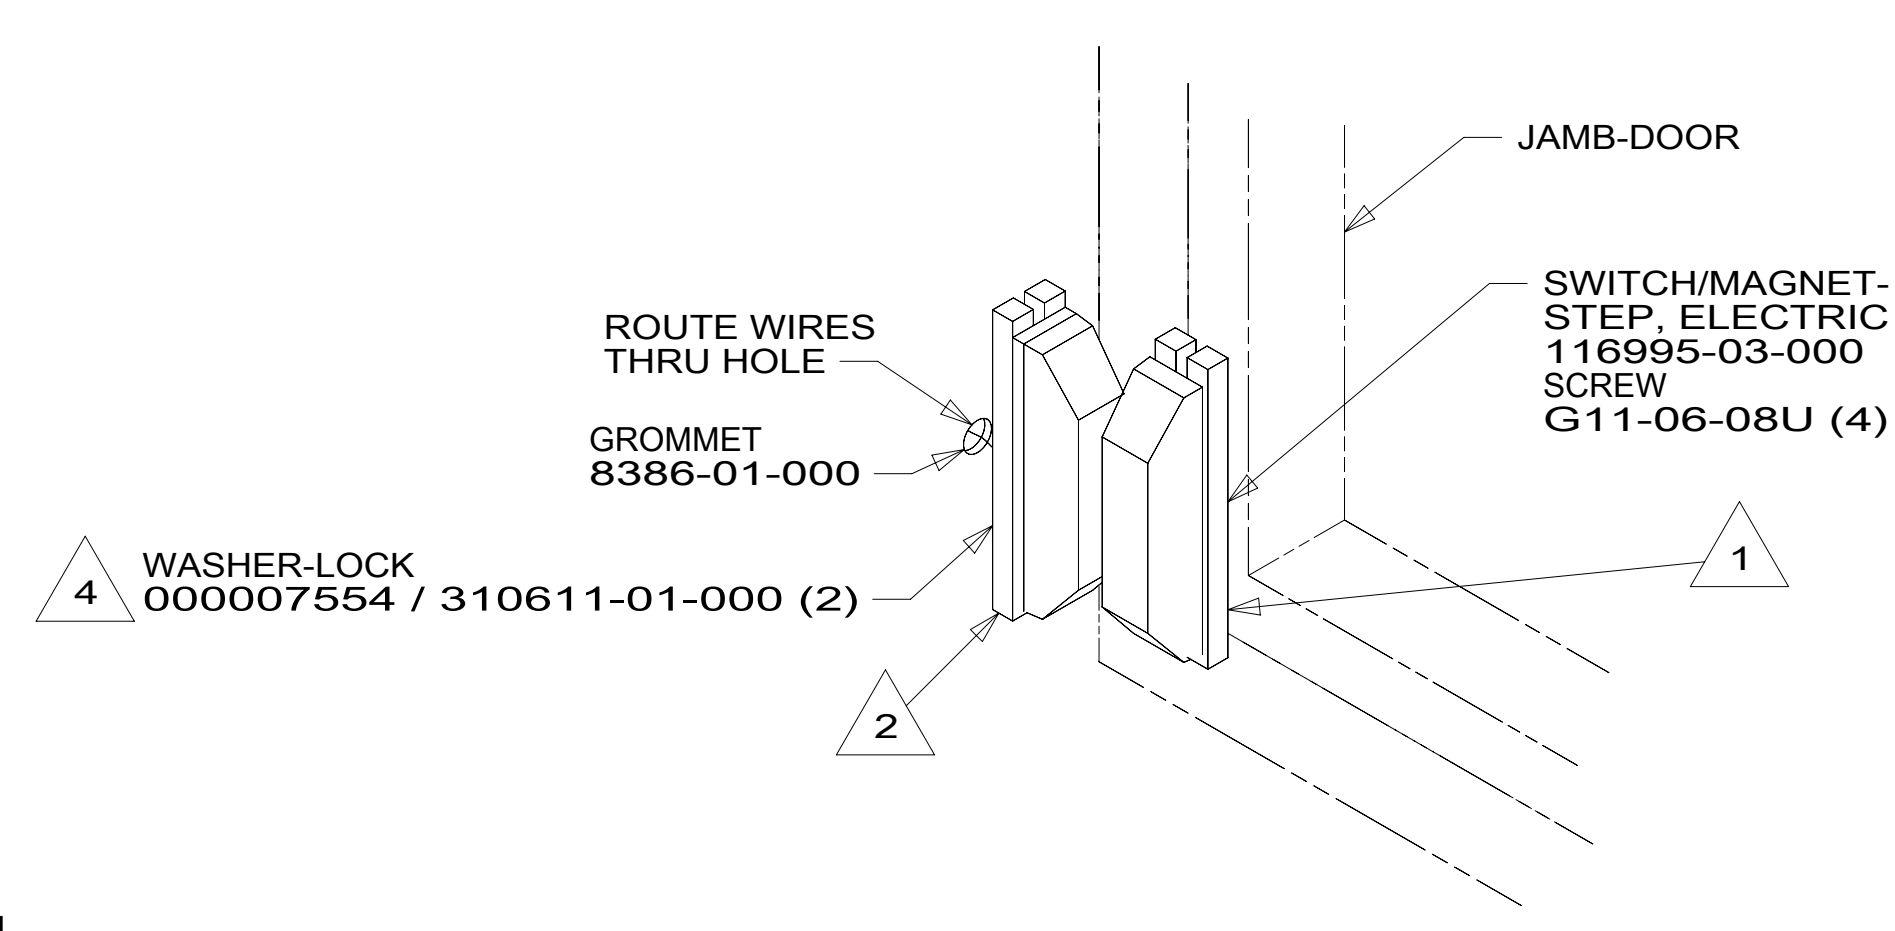

DETAIL DD

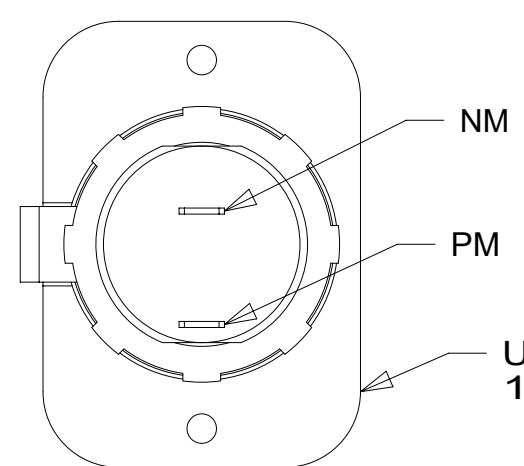

DETAIL DF


- NOTES:
- 4 REMOVE SCREWS FROM MAGNET SWITCH TO INSTALL LOCK WASHER AND RING TERMINALS.
  - 3 FOR POSITIONING DIMENSIONS SEE WIRING INSTL-BODY, 110V.
  - 2 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB ADJUST HEIGHT TO MATCH MAGNET.
  - 1 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

DESCRIPTION:	
<b>WIRING INSTL-BODY, 12V</b>	
SHEET: 4 OF 8	ITEM/PART NO: 000211568 / 30166601000
REV	

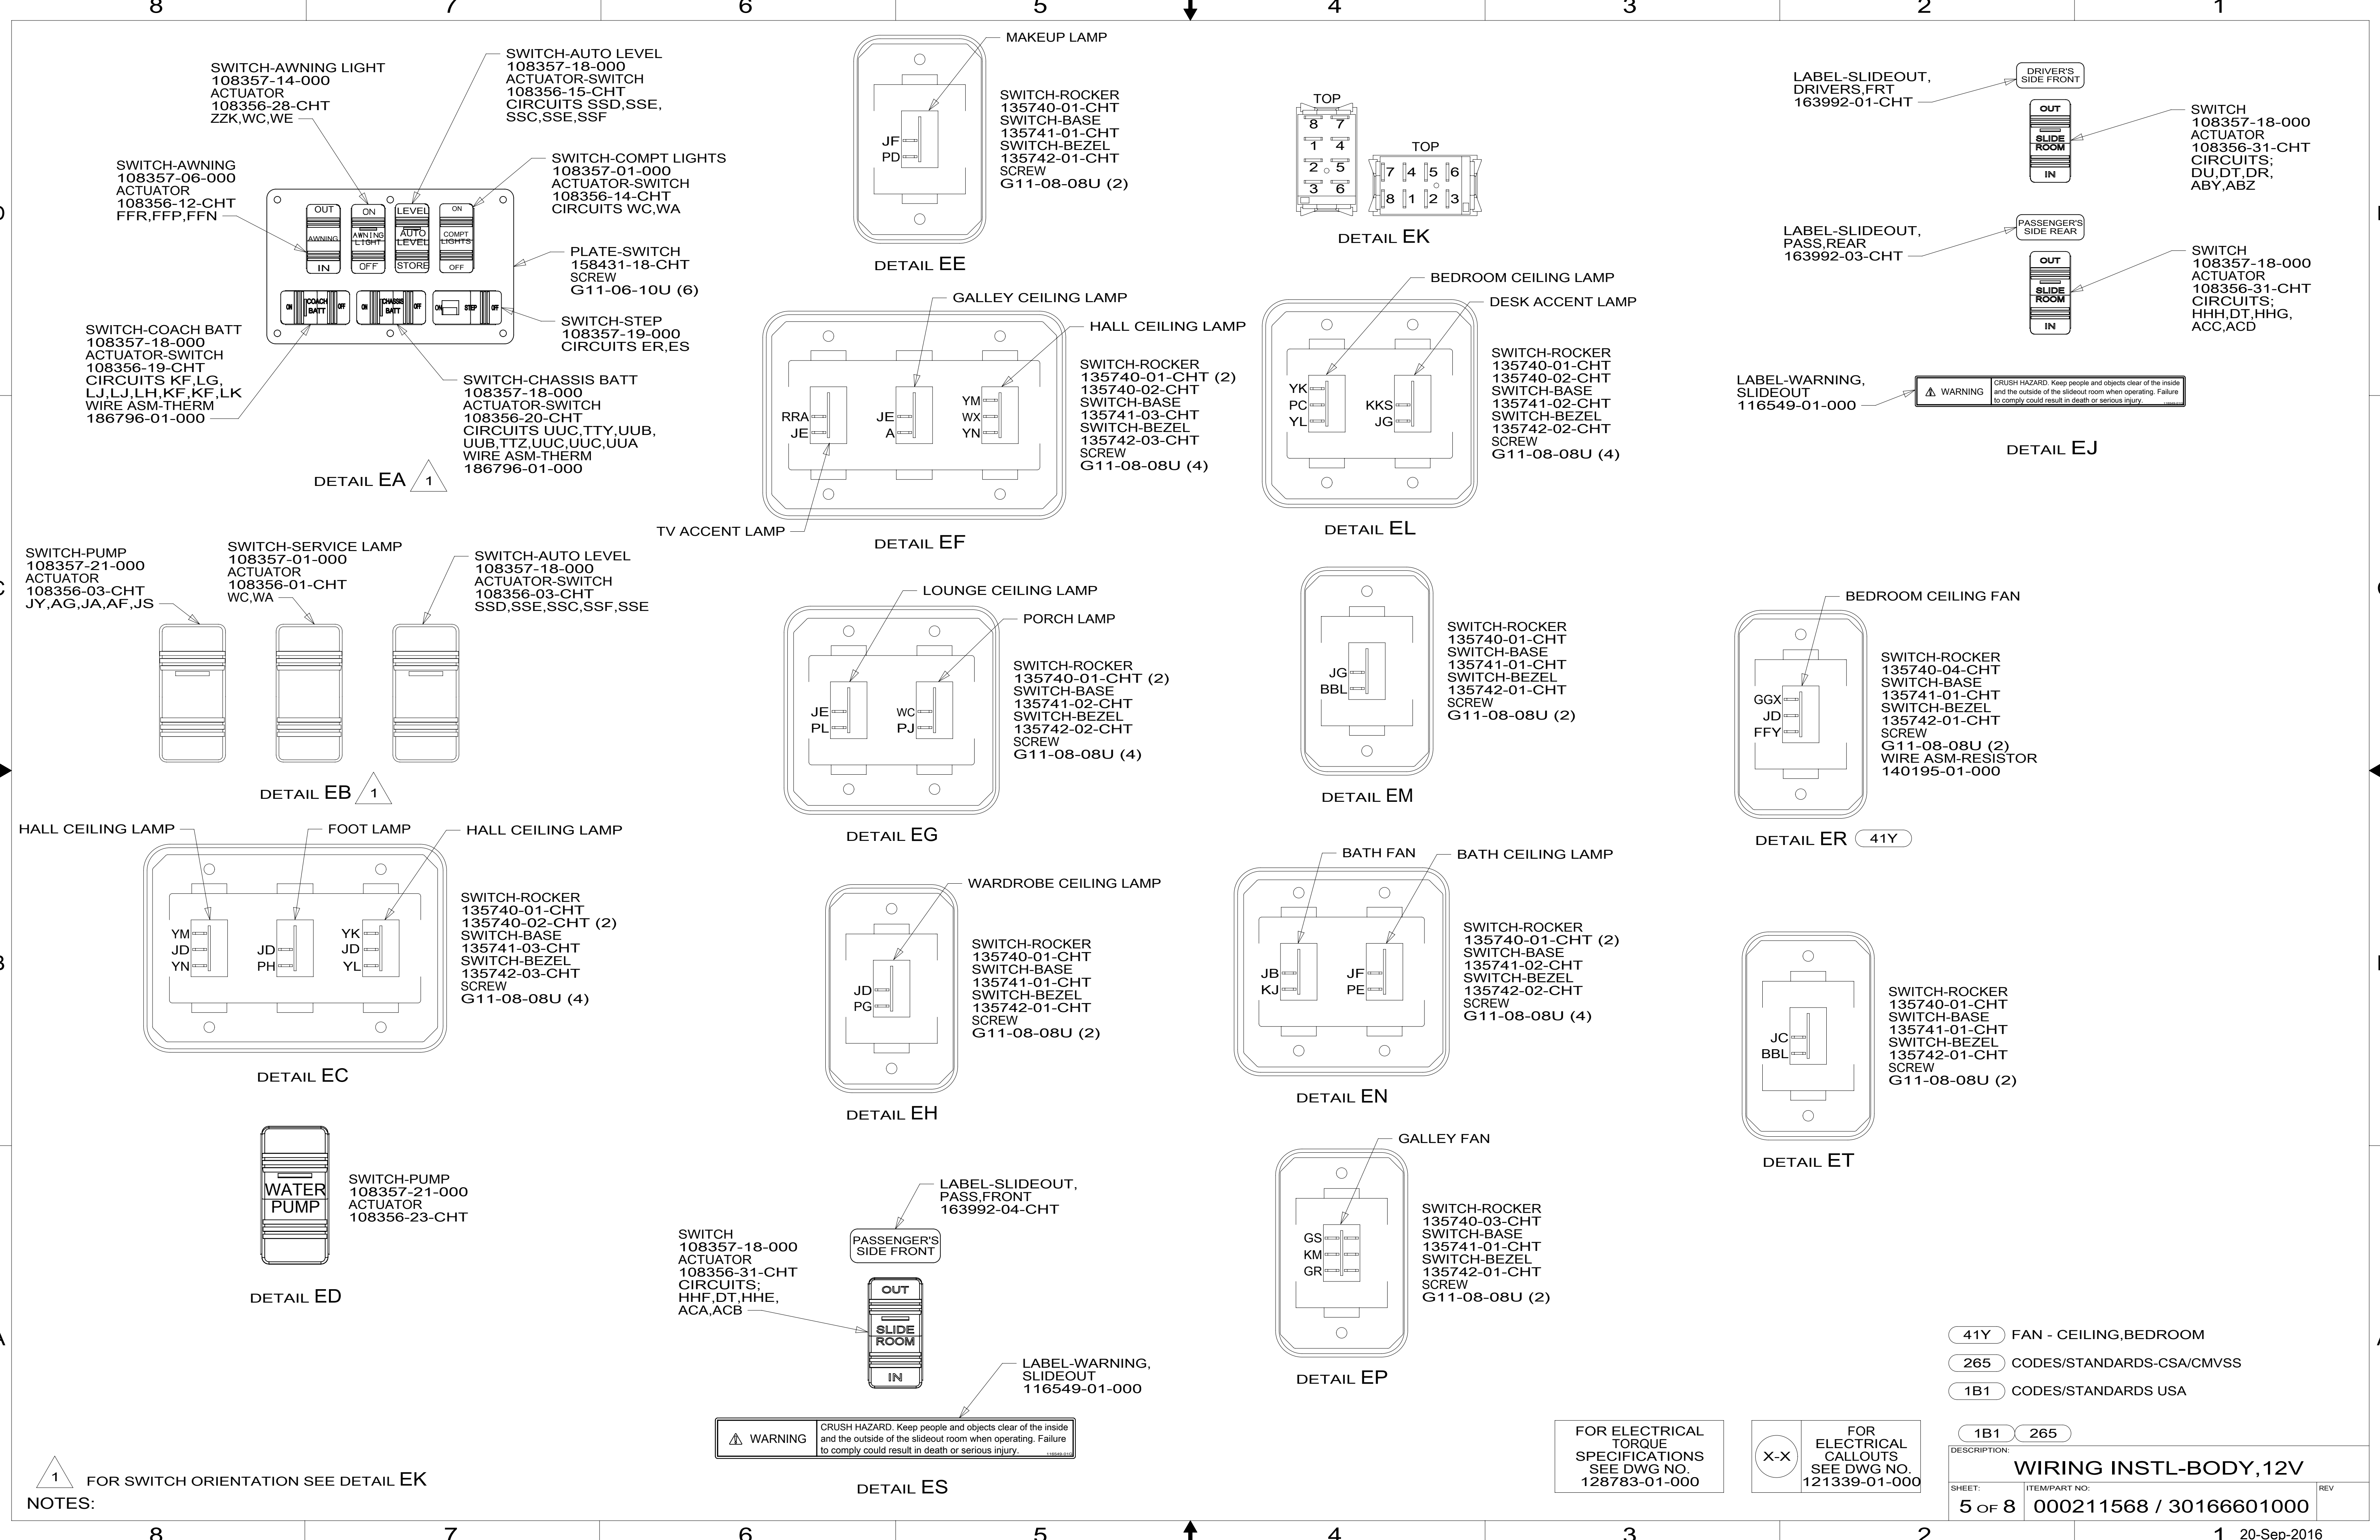

SWITCH-AWNING LIGHT  
108357-14-000  
ACTUATOR  
108356-28-CHT  
ZZK,WC,WE

SWITCH-AUTO LEVEL  
108357-18-000  
ACTUATOR-SWITCH  
108356-15-CHT  
CIRCUITS SSD,SSE,  
SSC,SSE,SSF

SWITCH-AWNING  
108357-06-000  
ACTUATOR  
108356-12-CHT  
FFR,FFP,FFN

SWITCH-COMPT LIGHTS  
108357-01-000  
ACTUATOR-SWITCH  
108356-14-CHT  
CIRCUITS WC,WA

SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

LABEL-SLIDEOUT,  
DRIVERS,FRT  
163992-01-CHT

SWITCH  
108357-18-000  
ACTUATOR  
108356-31-CHT  
CIRCUITS;  
DU,DT,DR,  
ABY,ABZ

SWITCH-COACH BATT  
108357-18-000  
ACTUATOR-SWITCH  
108356-19-CHT  
CIRCUITS KF,LG,  
LJ,LJ,LH,KF,KF,LK  
WIRE ASM-THERM  
186796-01-000

PLATE-SWITCH  
158431-18-CHT  
SCREW  
G11-06-10U (6)

SWITCH-STEP  
108357-19-000  
CIRCUITS ER,ES

LABEL-SLIDEOUT,  
PASS,REAR  
163992-03-CHT

SWITCH  
108357-18-000  
ACTUATOR  
108356-31-CHT  
CIRCUITS;  
HHH,DT,HHG,  
ACC,ACD

DETAIL EA 1

DETAIL EE


DETAIL EK

DETAIL EJ


SWITCH-PUMP  
108357-21-000  
ACTUATOR  
108356-03-CHT  
JY,AG,JA,AF,JS

SWITCH-SERVICE LAMP  
108357-01-000  
ACTUATOR  
108356-01-CHT  
WC,WA

SWITCH-AUTO LEVEL  
108357-18-000  
ACTUATOR-SWITCH  
108356-03-CHT  
SSD,SSE,SSC,SSF,SSE


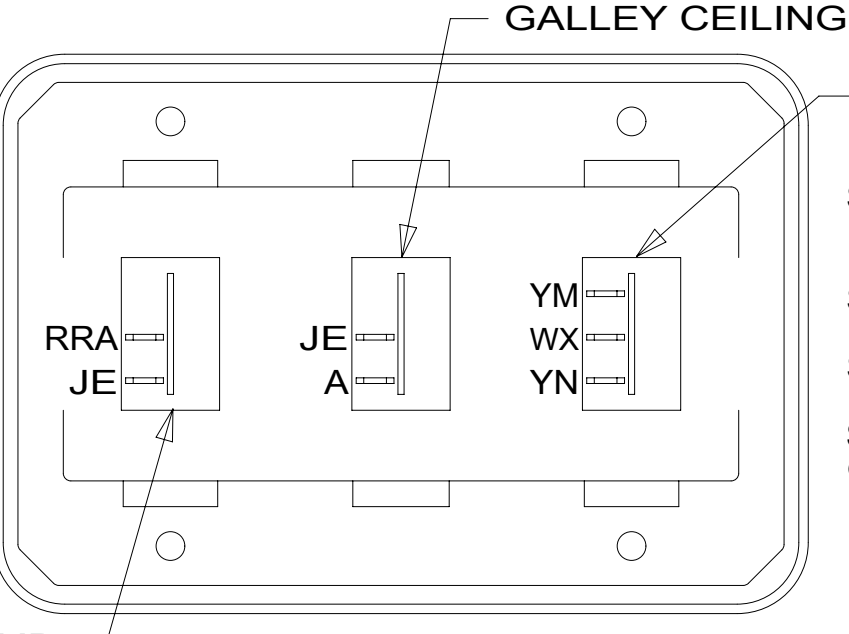


SWITCH-ROCKER  
135740-01-CHT (2)  
135740-02-CHT  
SWITCH-BASE  
135741-03-CHT  
SWITCH-BEZEL  
135742-03-CHT  
SCREW  
G11-08-08U (4)

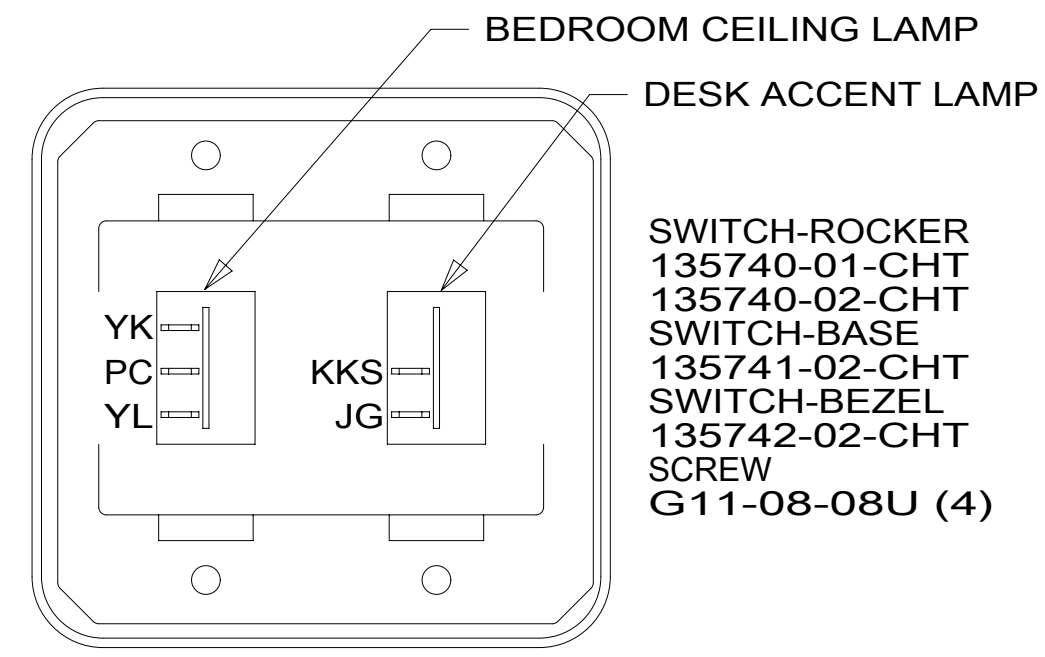


SWITCH-ROCKER  
135740-01-CHT  
135740-02-CHT  
SWITCH-BASE  
135741-02-CHT  
SWITCH-BEZEL  
135742-02-CHT  
SCREW  
G11-08-08U (4)


LABEL-WARNING,  
SLIDEOUT  
116549-01-000

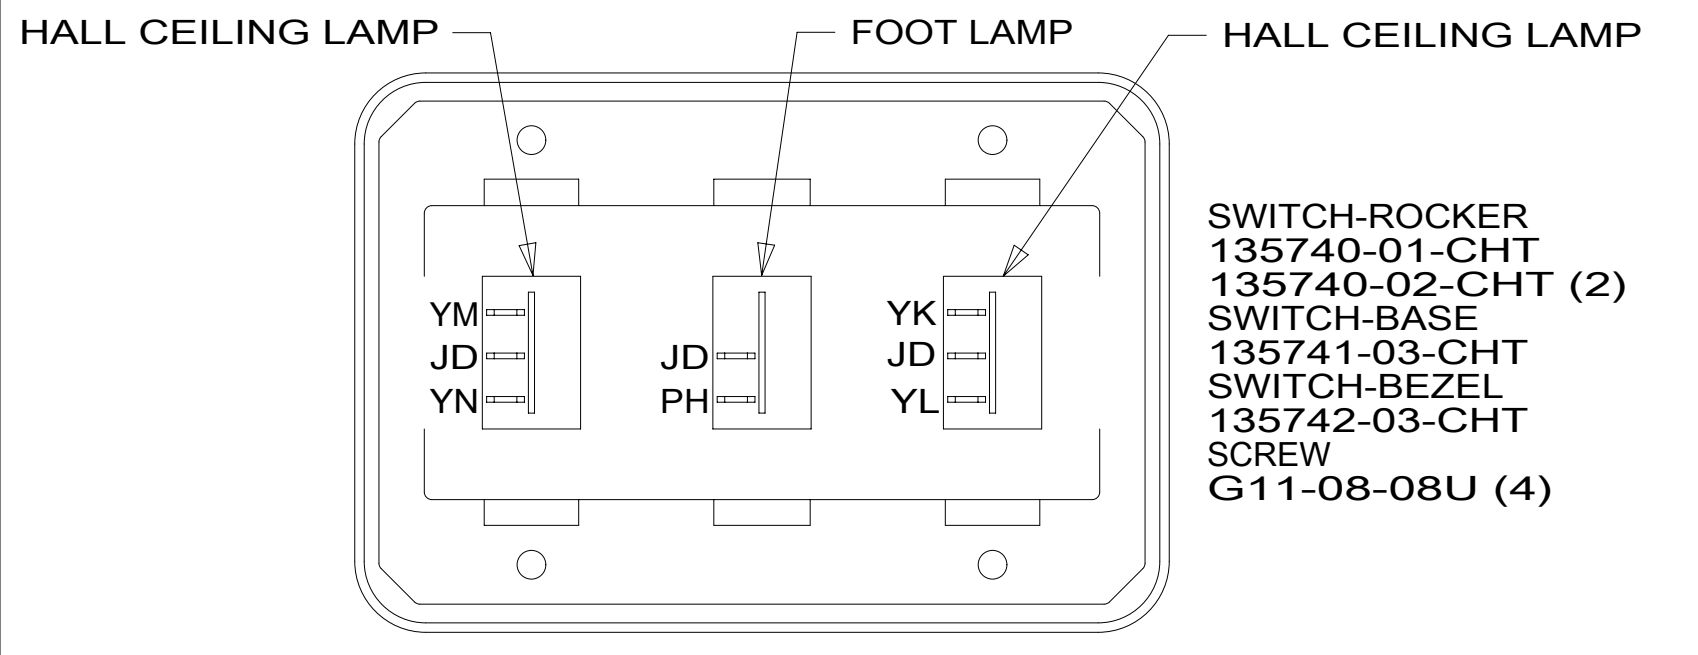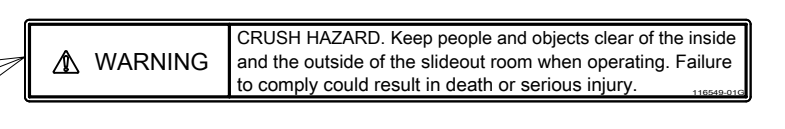


SWITCH-ROCKER  
135740-01-CHT (2)  
135740-02-CHT  
SWITCH-BASE  
135741-03-CHT  
SWITCH-BEZEL  
135742-03-CHT  
SCREW  
G11-08-08U (4)

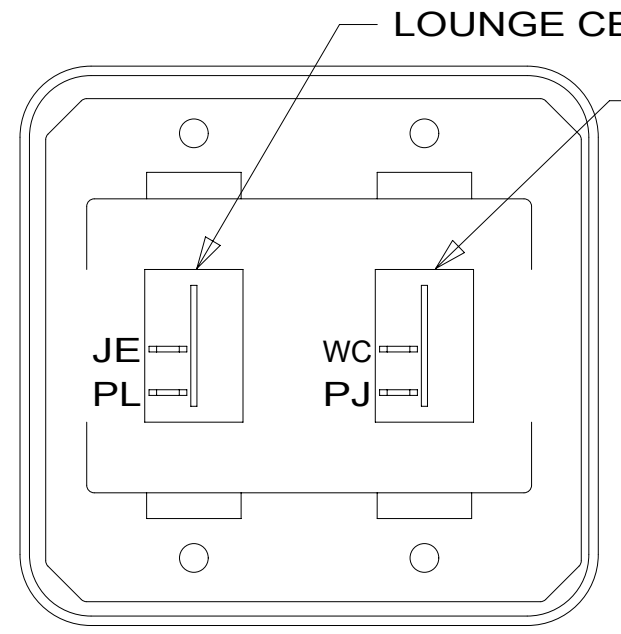


SWITCH-ROCKER  
135740-01-CHT (2)  
SWITCH-BASE  
135741-02-CHT  
SWITCH-BEZEL  
135742-02-CHT  
SCREW  
G11-08-08U (4)

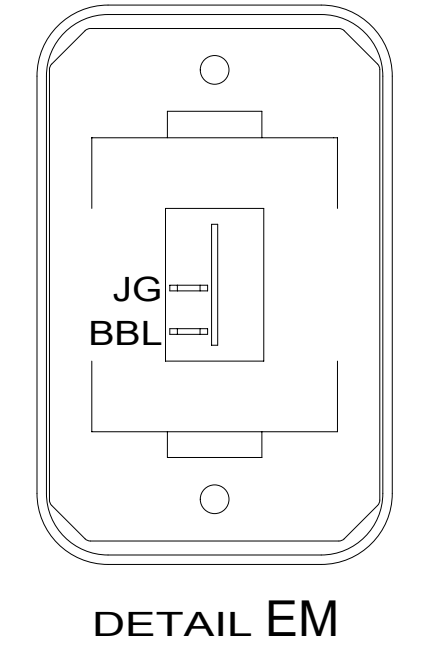


SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

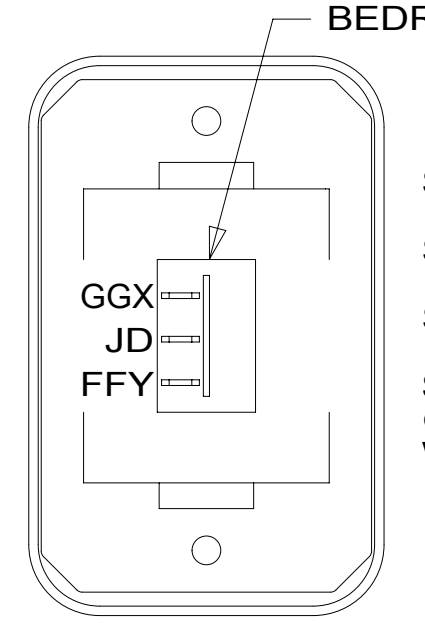


SWITCH-ROCKER  
135740-04-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)  
WIRE ASM-RESISTOR  
140195-01-000

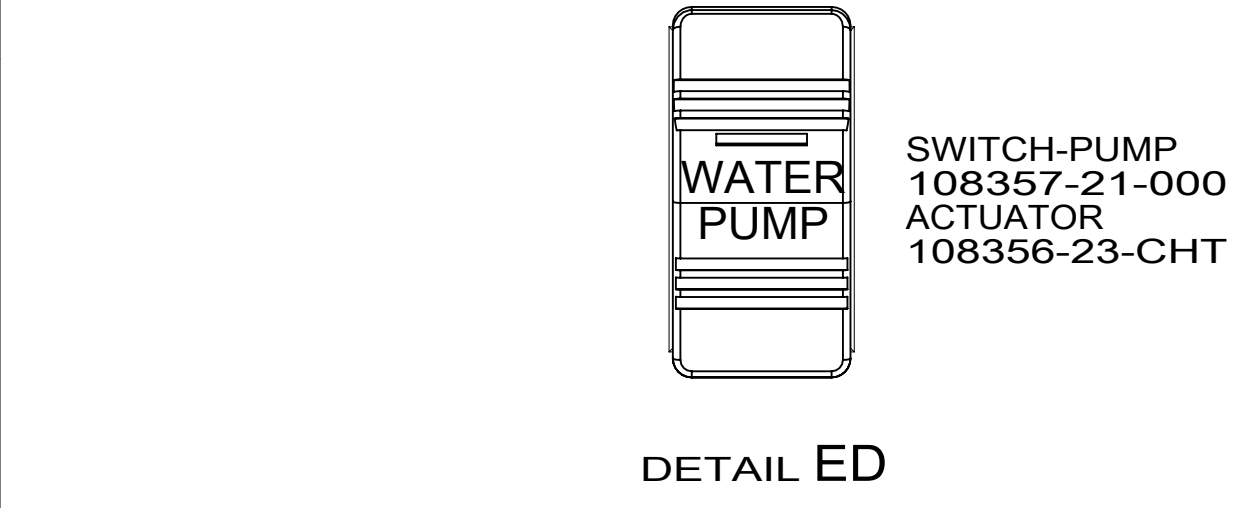


SWITCH-PUMP  
108357-21-000  
ACTUATOR  
108356-23-CHT

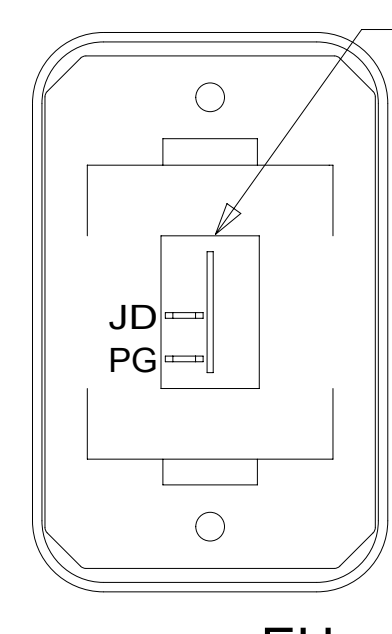


SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

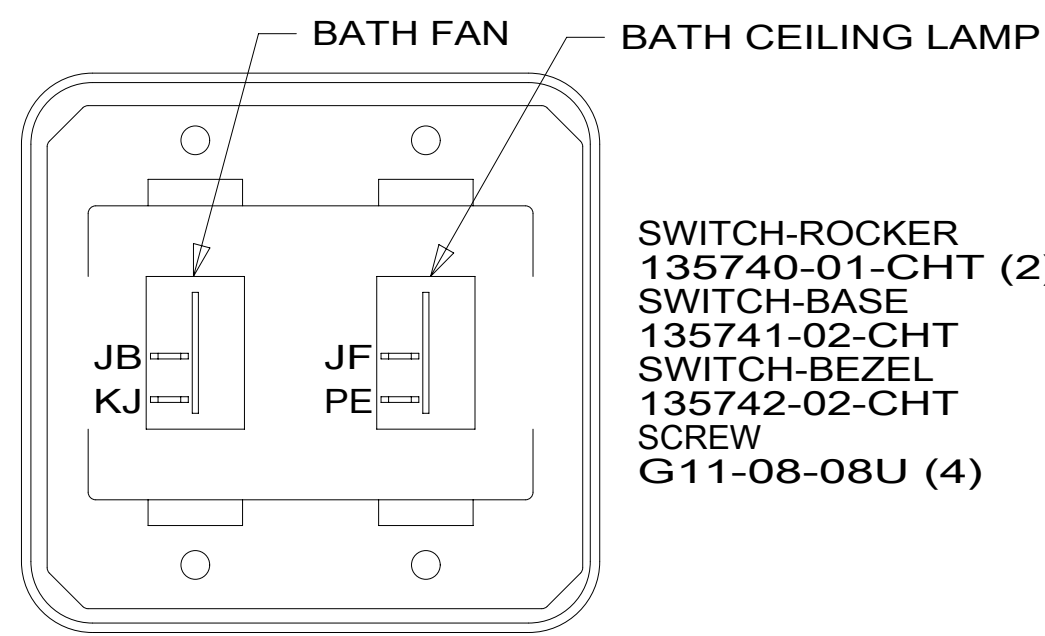


SWITCH-ROCKER  
135740-01-CHT (2)  
SWITCH-BASE  
135741-02-CHT  
SWITCH-BEZEL  
135742-02-CHT  
SCREW  
G11-08-08U (4)

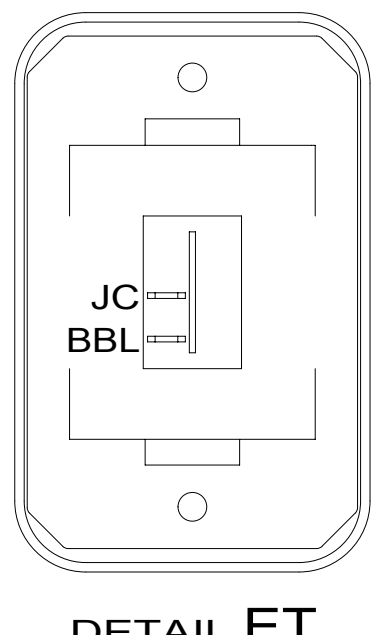



SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

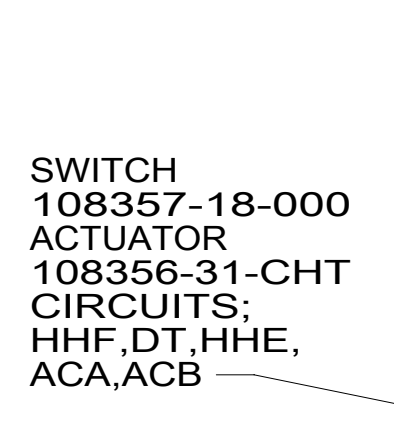

LABEL-SLIDEOUT,  
PASS,FRONT  
163992-04-CHT



LABEL-WARNING,  
SLIDEOUT  
116549-01-000

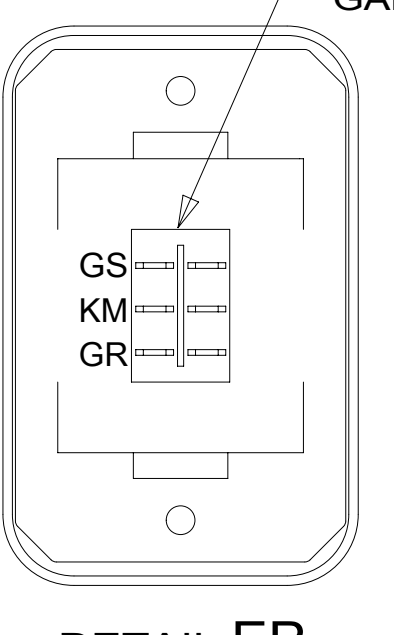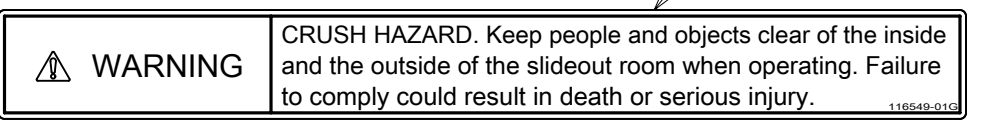

SWITCH-ROCKER  
135740-03-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)


- 41Y FAN - CEILING,BEDROOM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

DESCRIPTION: <b>WIRING INSTL-BODY, 12V</b>	
SHEET: 5 OF 8	ITEM/PART NO: 000211568 / 30166601000
REV 1 20-Sep-2016	

NOTES:  
1 FOR SWITCH ORIENTATION SEE DETAIL EK

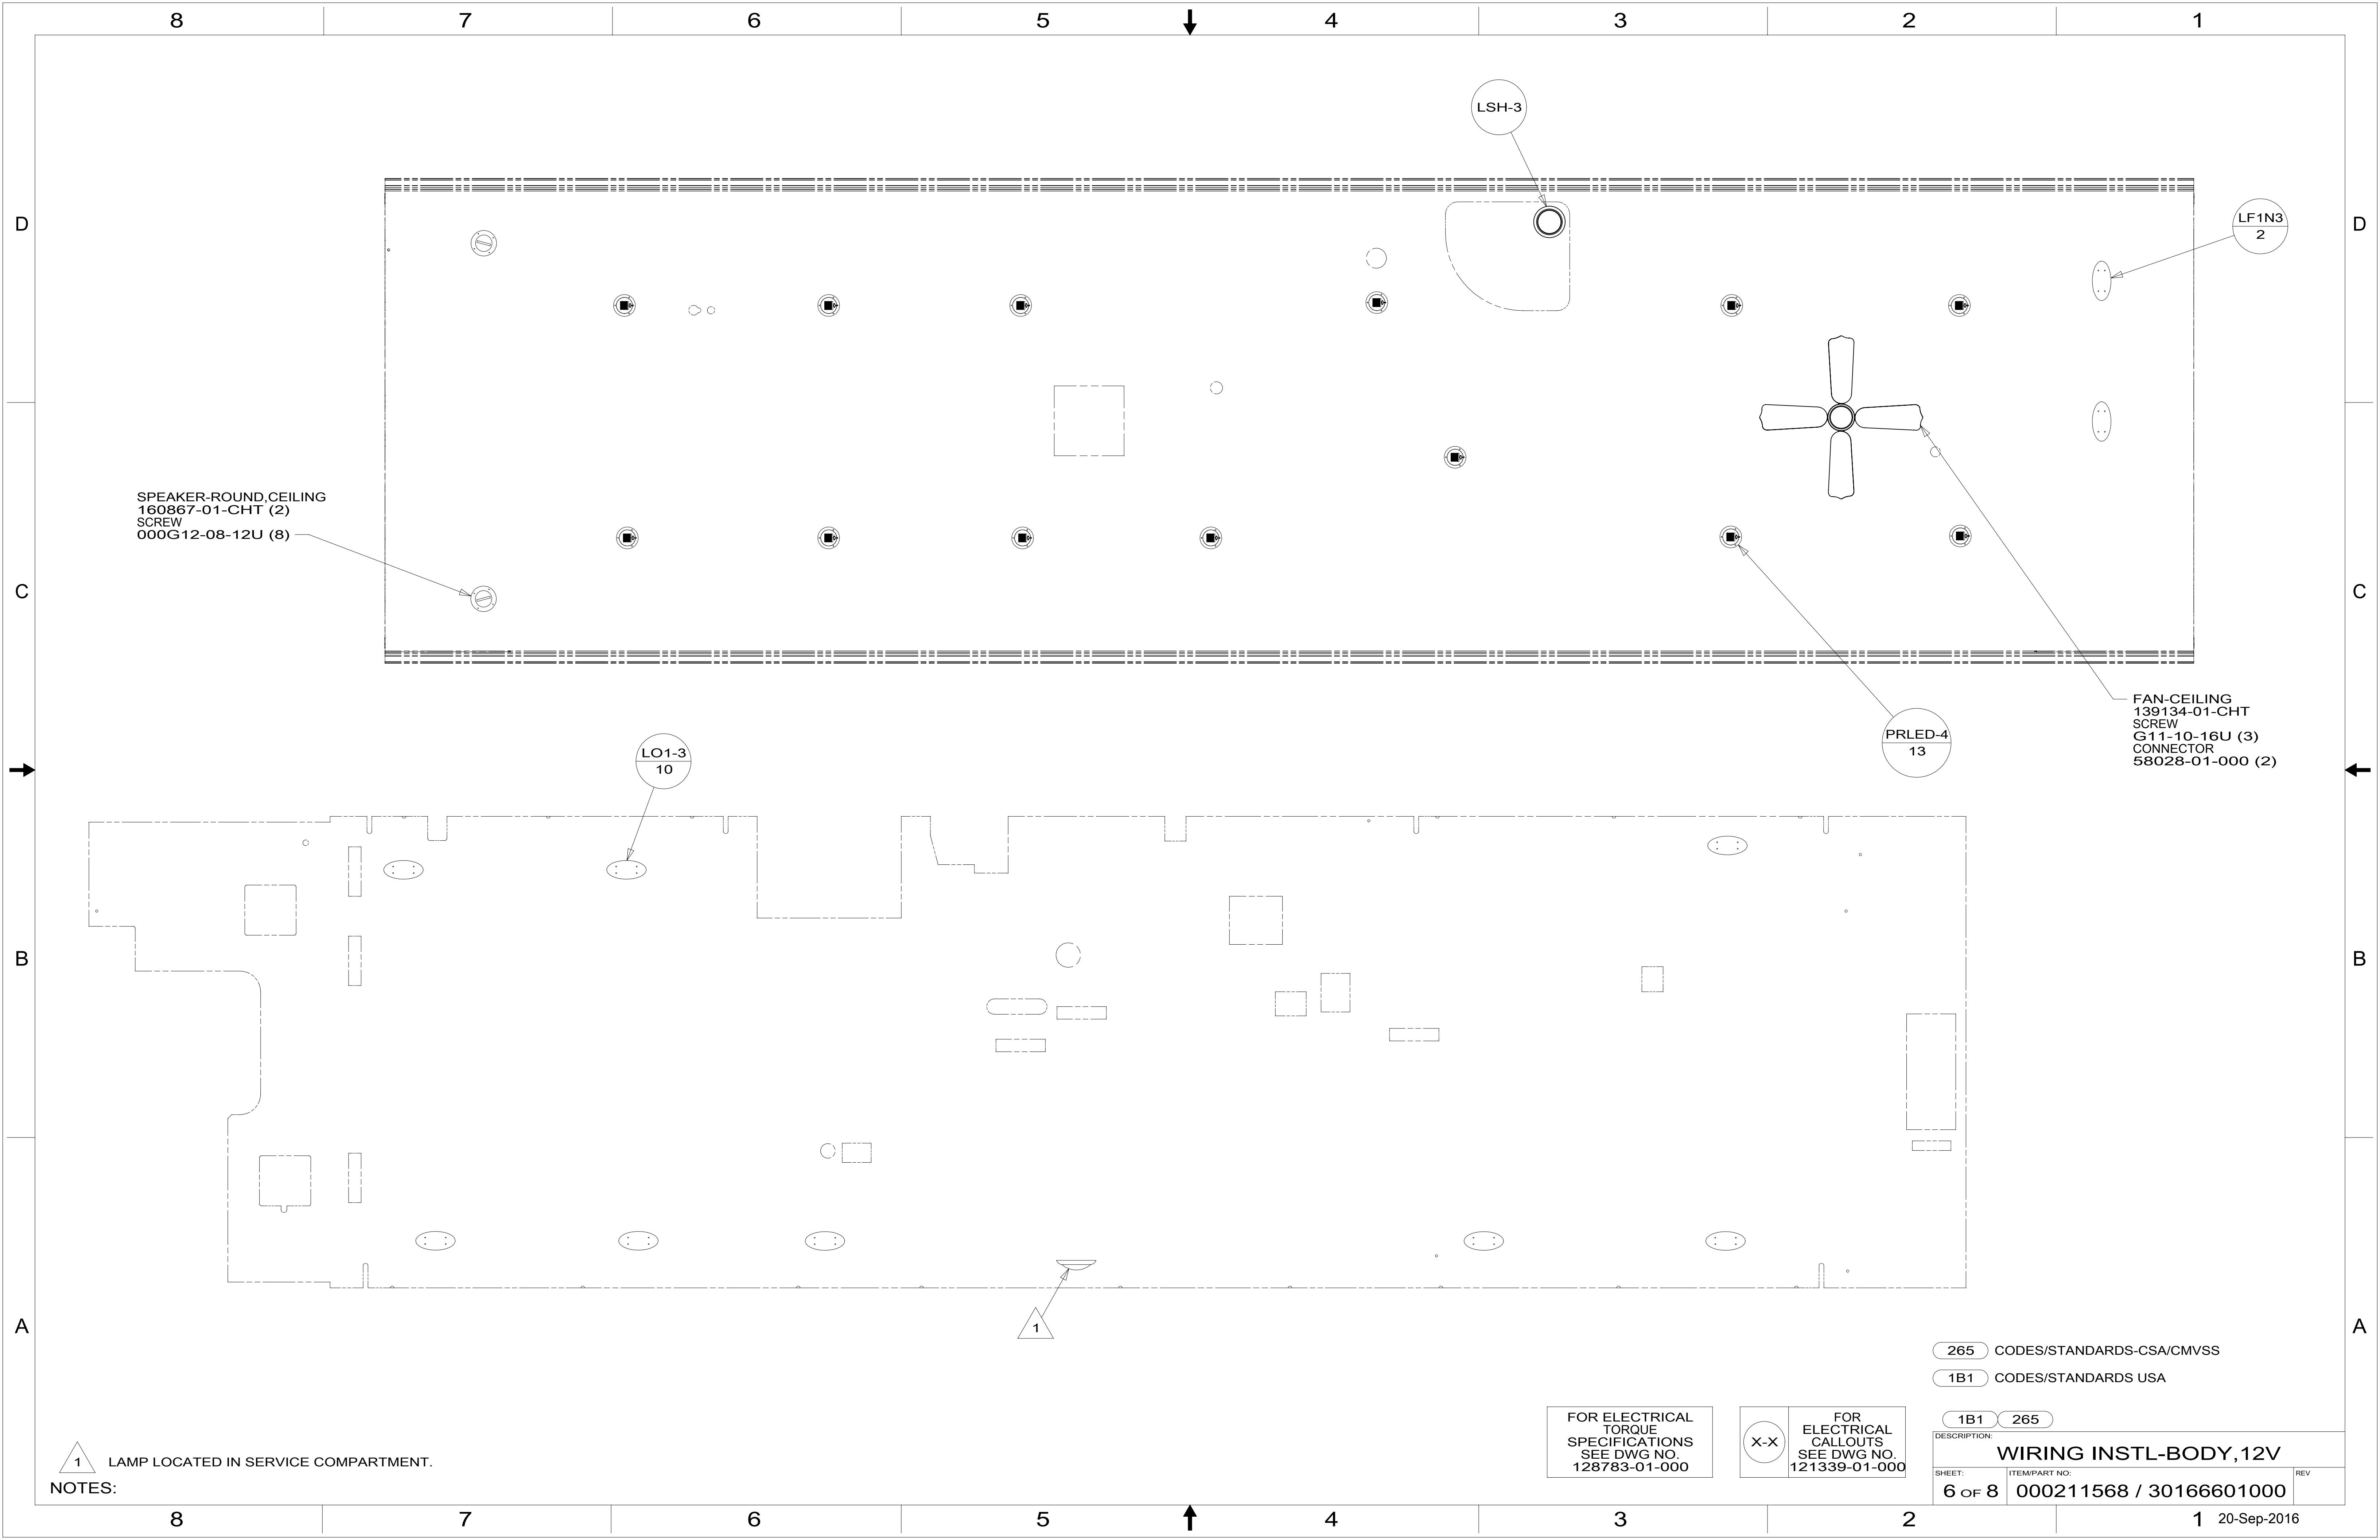

SPEAKER-ROUND,CEILING  
160867-01-CHT (2)  
SCREW  
000G12-08-12U (8)

LSH-3

LF1N3  
2

PRLED-4  
13

FAN-CEILING  
139134-01-CHT  
SCREW  
G11-10-16U (3)  
CONNECTOR  
58028-01-000 (2)

LO1-3  
10

1

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000


FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

DESCRIPTION: <b>WIRING INSTL-BODY, 12V</b>		
SHEET: <b>6 OF 8</b>	ITEM/PART NO: <b>000211568 / 30166601000</b>	REV





1 LAMP LOCATED IN SERVICE COMPARTMENT.

NOTES:



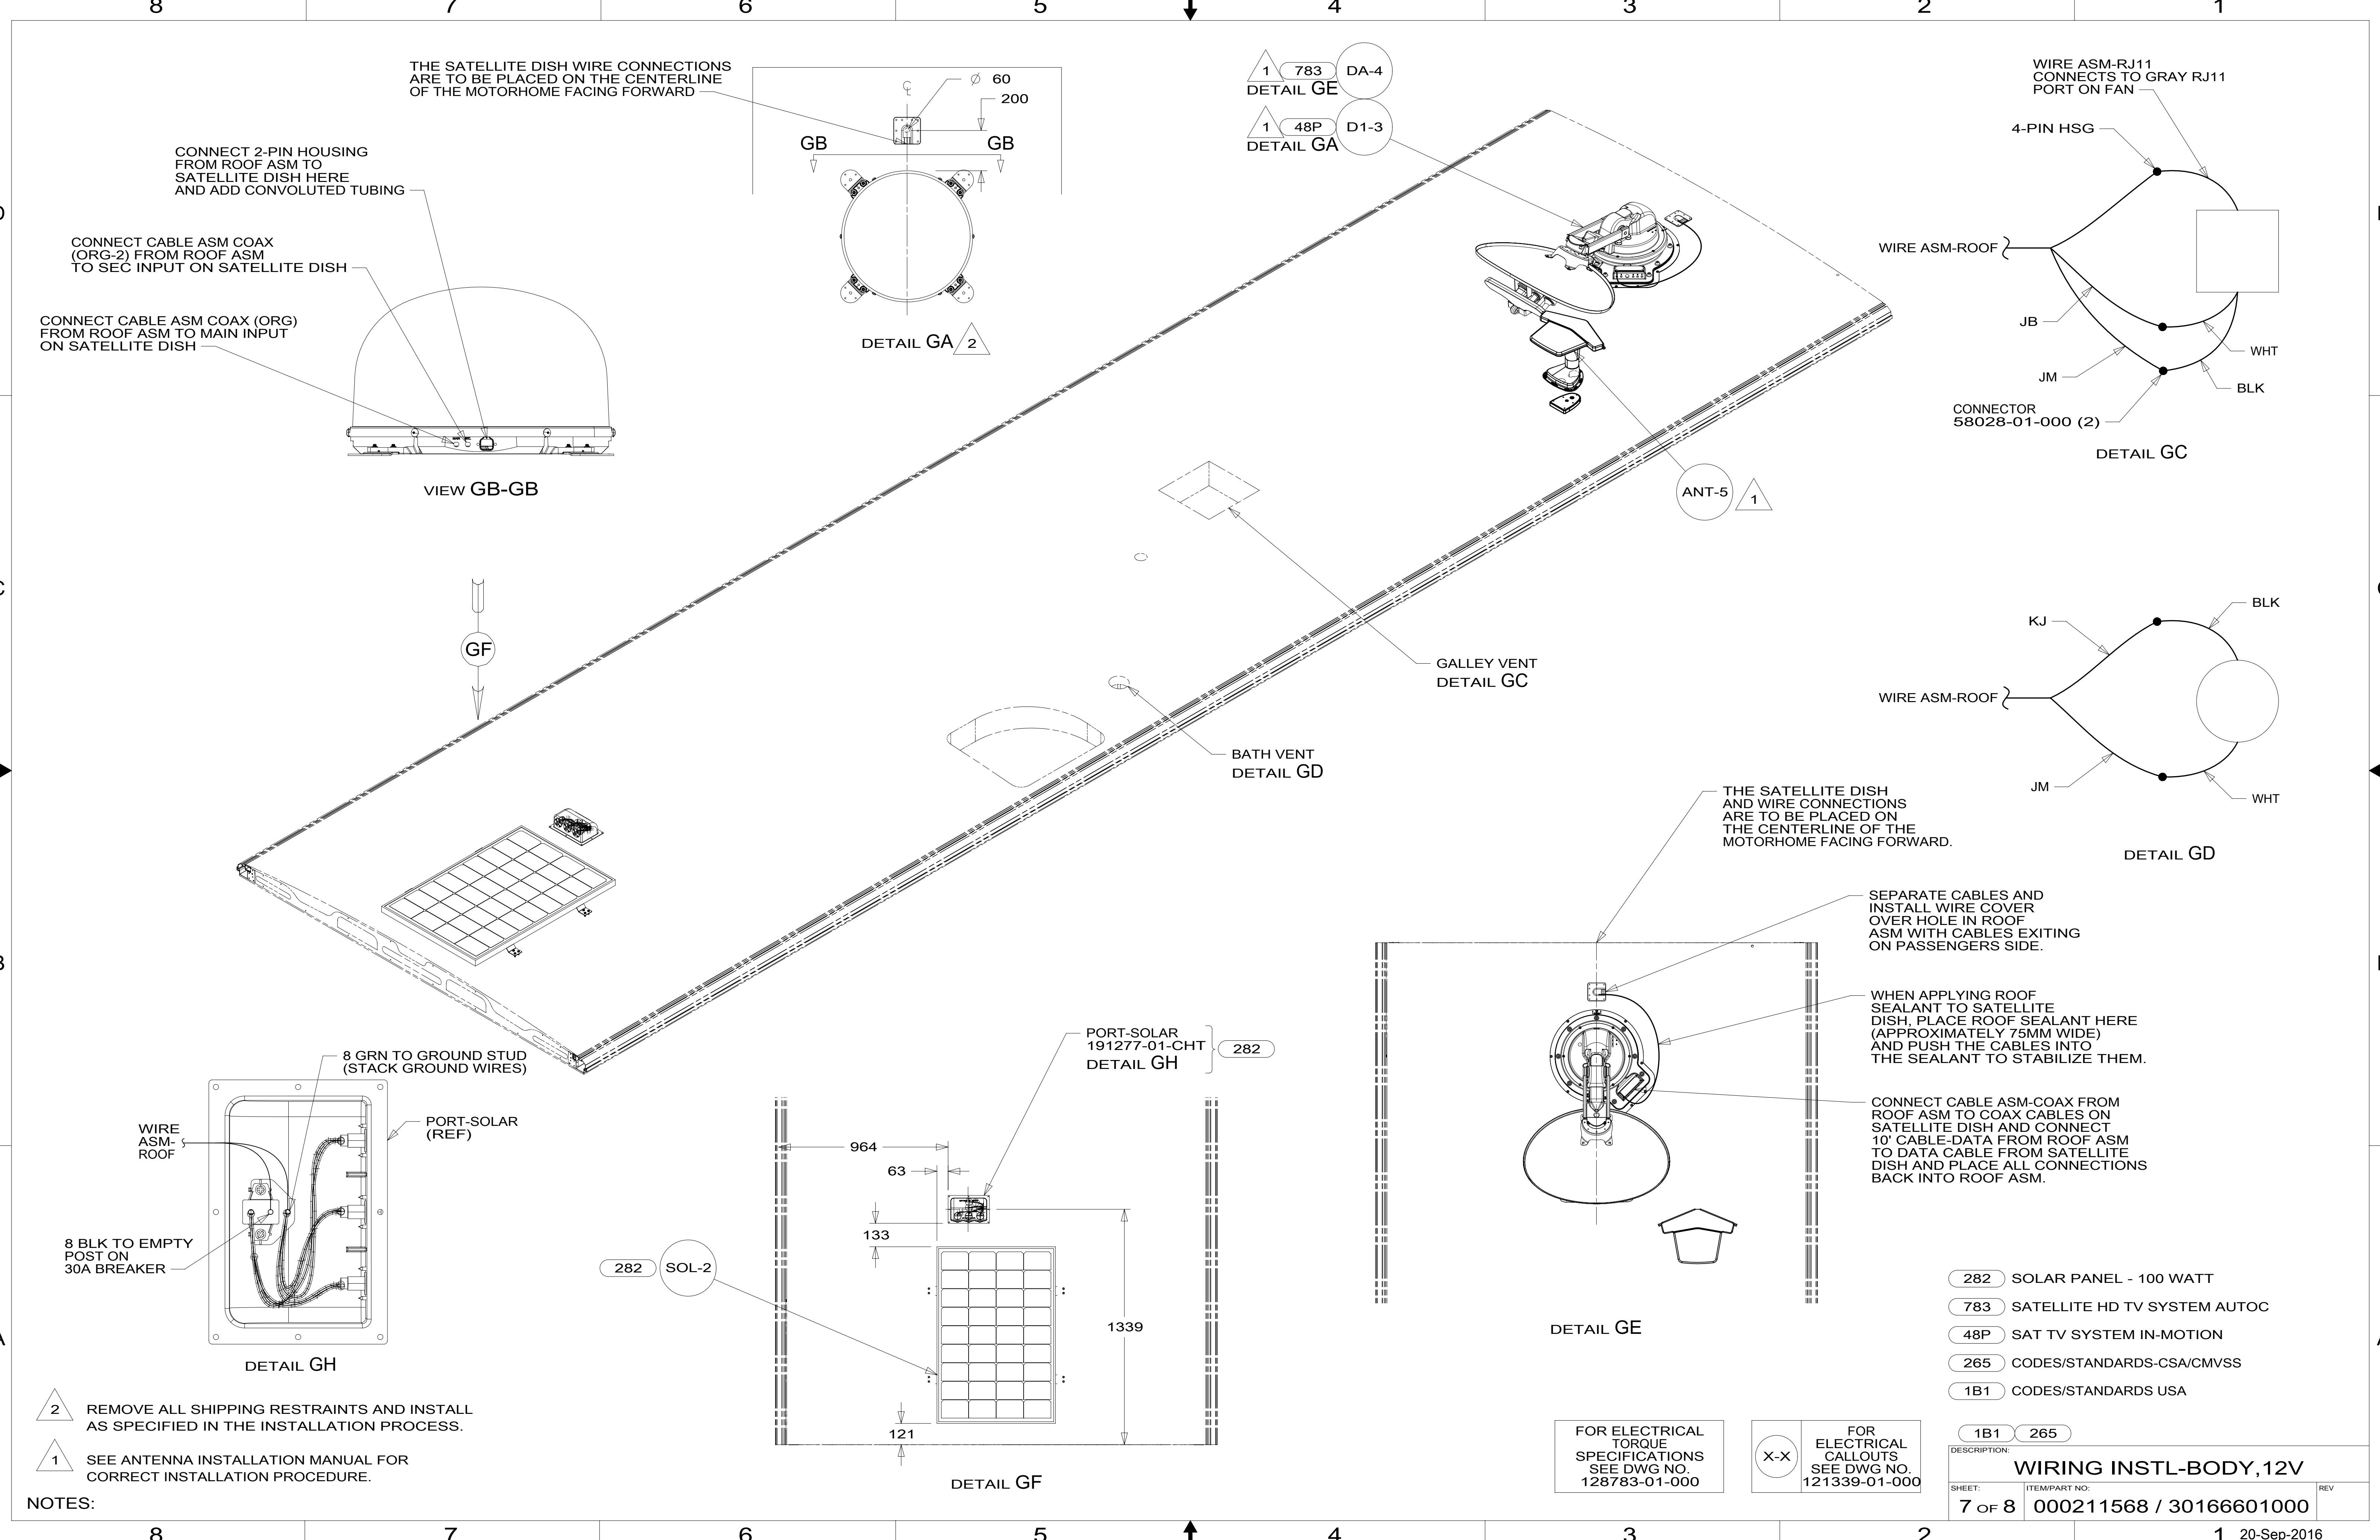

THE SATELLITE DISH WIRE CONNECTIONS ARE TO BE PLACED ON THE CENTERLINE OF THE MOTORHOME FACING FORWARD

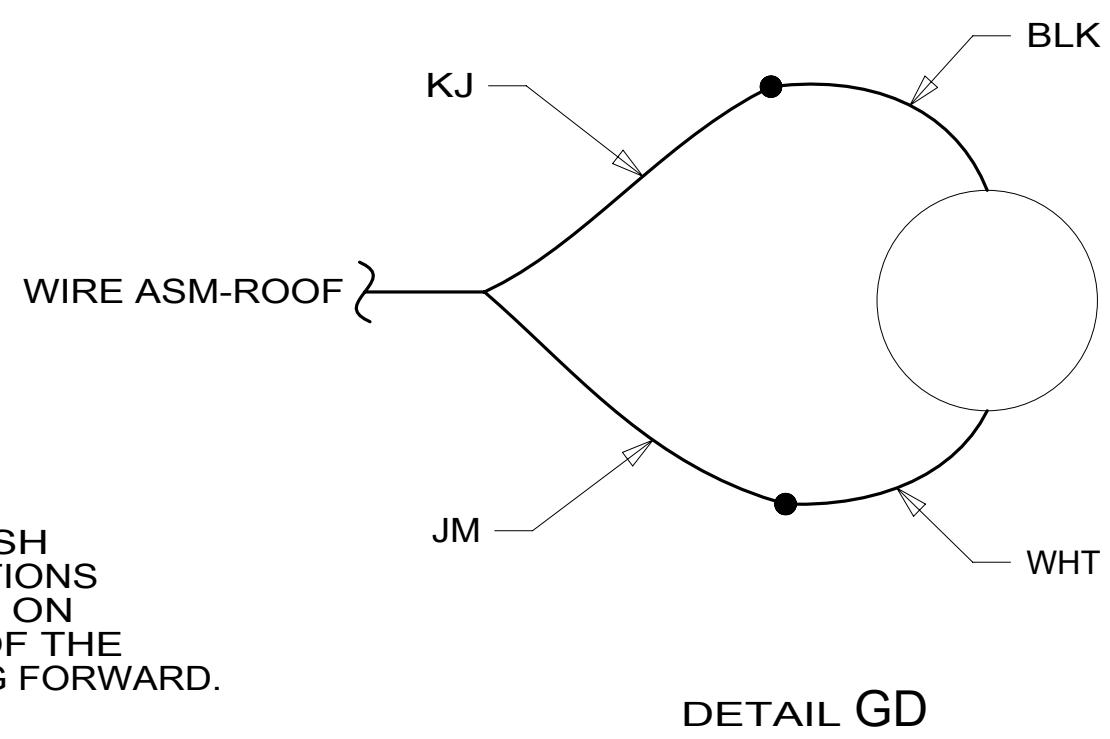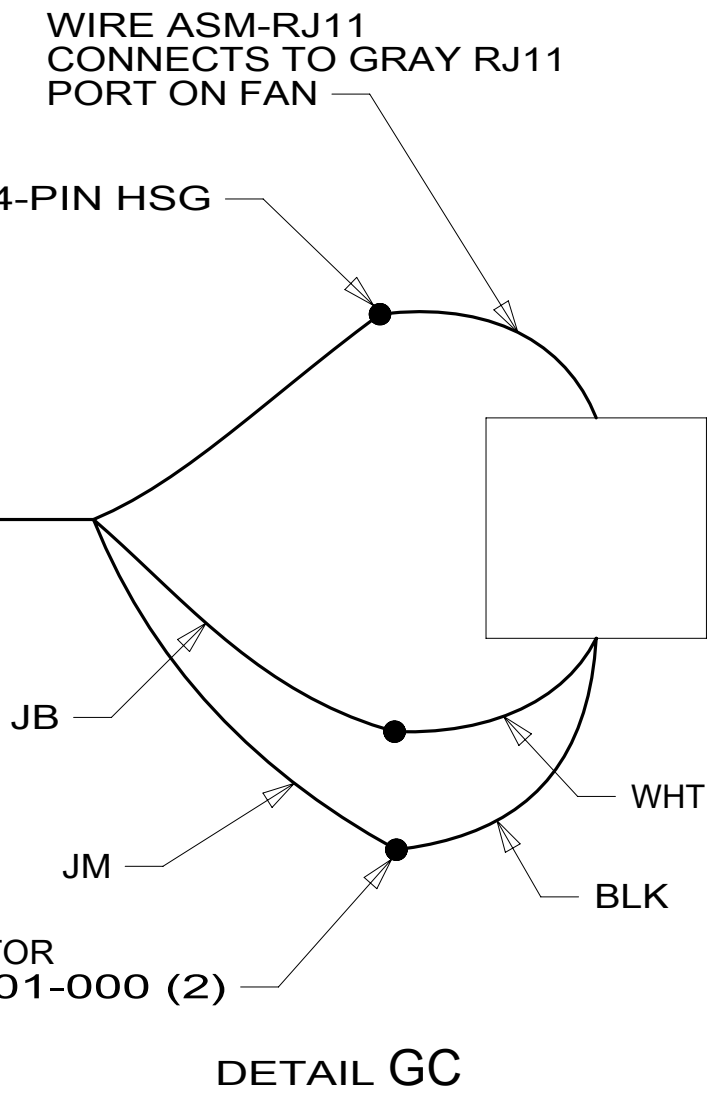
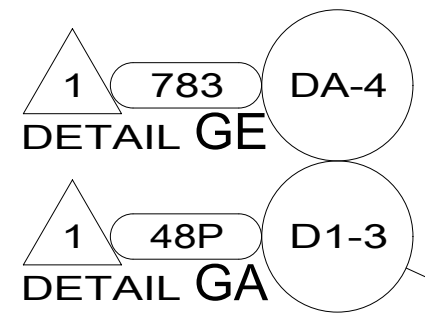
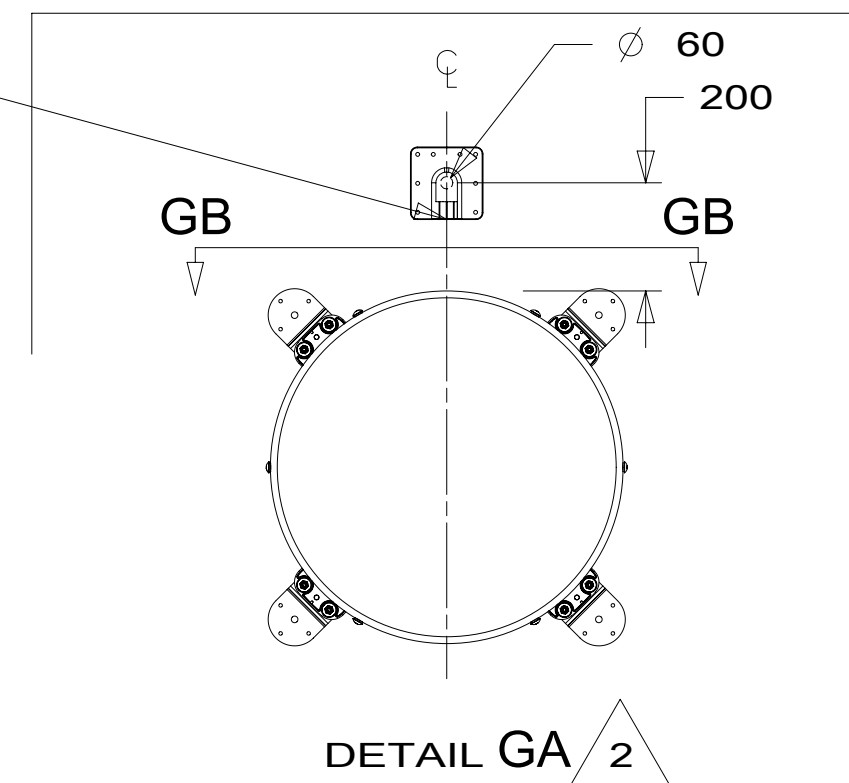


THE SATELLITE DISH AND WIRE CONNECTIONS ARE TO BE PLACED ON THE CENTERLINE OF THE MOTORHOME FACING FORWARD.

SEPARATE CABLES AND INSTALL WIRE COVER OVER HOLE IN ROOF ASM WITH CABLES EXITING ON PASSENGERS SIDE.

WHEN APPLYING ROOF SEALANT TO SATELLITE DISH, PLACE ROOF SEALANT HERE (APPROXIMATELY 75MM WIDE) AND PUSH THE CABLES INTO THE SEALANT TO STABILIZE THEM.

CONNECT CABLE ASM-COAX FROM ROOF ASM TO COAX CABLES ON SATELLITE DISH AND CONNECT 10' CABLE-DATA FROM ROOF ASM TO DATA CABLE FROM SATELLITE DISH AND PLACE ALL CONNECTIONS BACK INTO ROOF ASM.

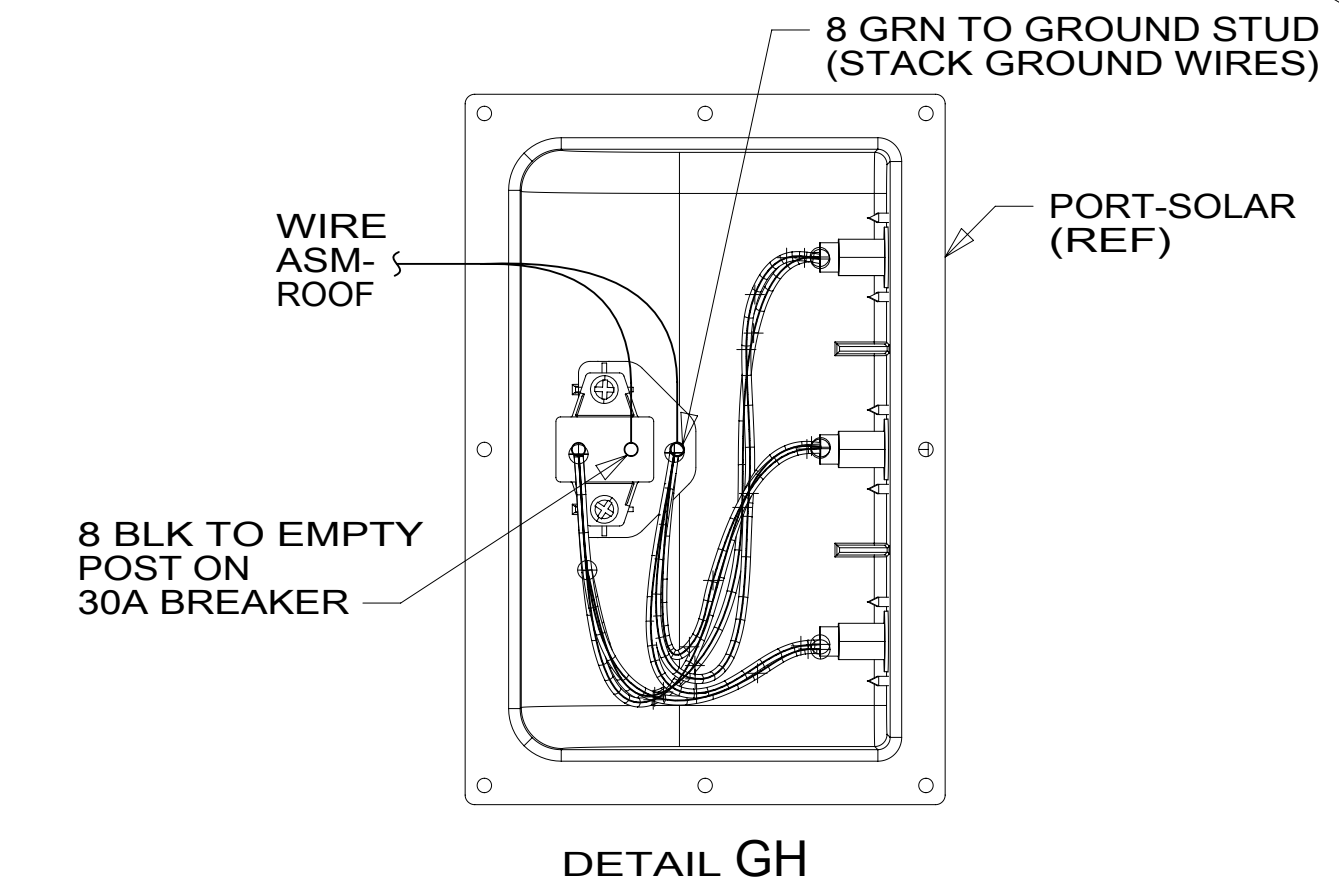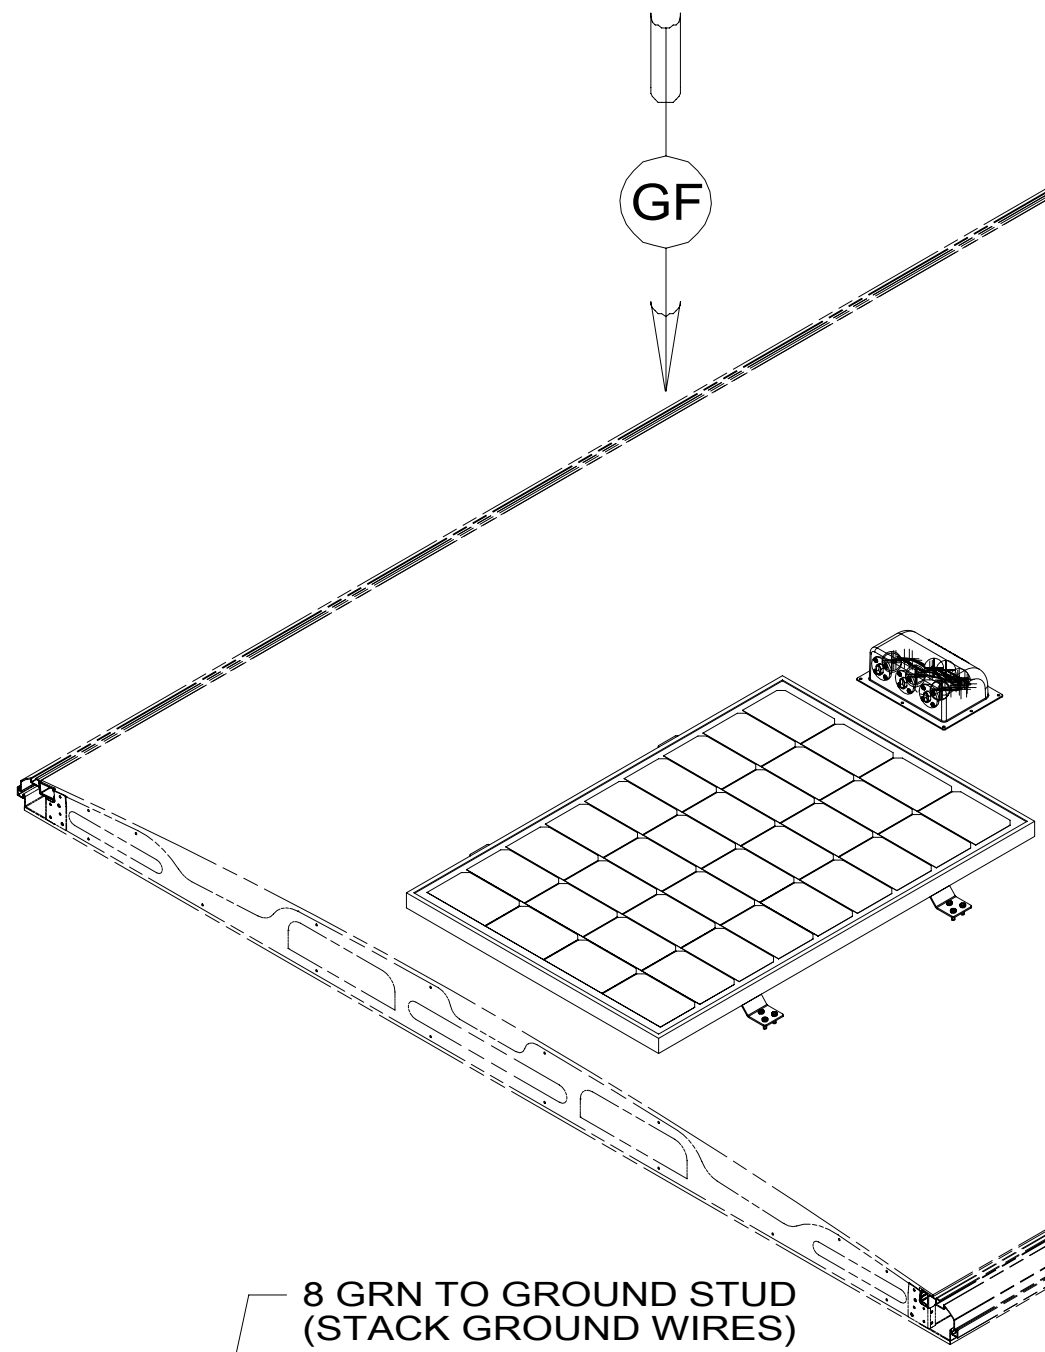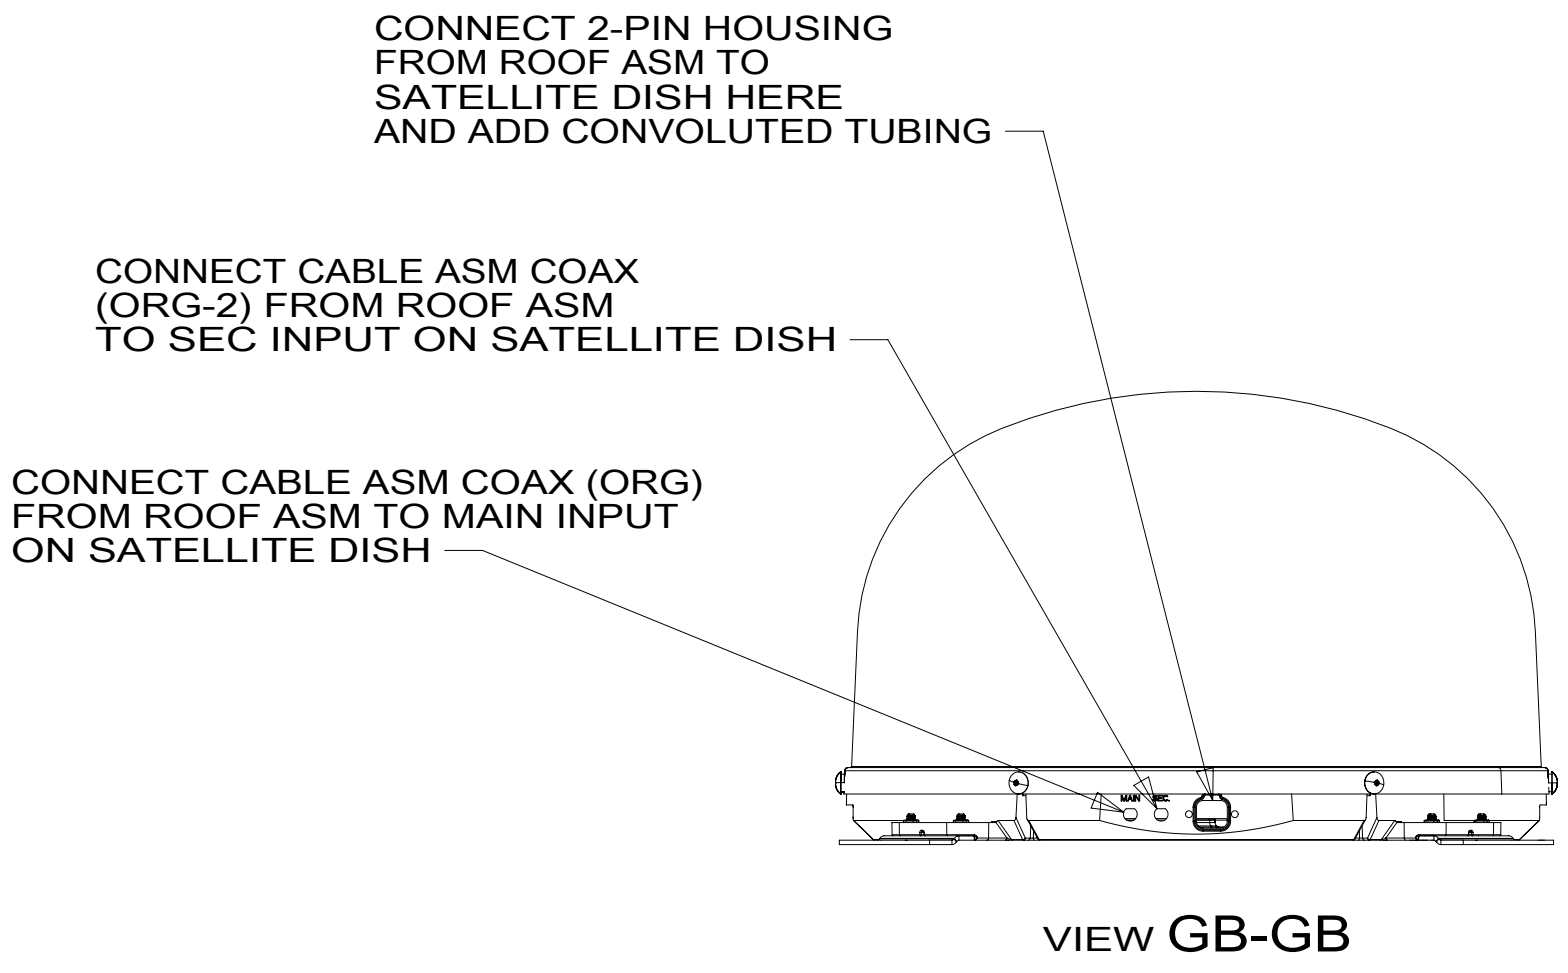


- NOTES:
- 2 REMOVE ALL SHIPPING RESTRAINTS AND INSTALL AS SPECIFIED IN THE INSTALLATION PROCESS.
  - 1 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 783 SATELLITE HD TV SYSTEM AUTOC
- 48P SAT TV SYSTEM IN-MOTION
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: <b>WIRING INSTL-BODY, 12V</b>		
SHEET: 7 OF 8	ITEM/PART NO: 000211568 / 30166601000	REV

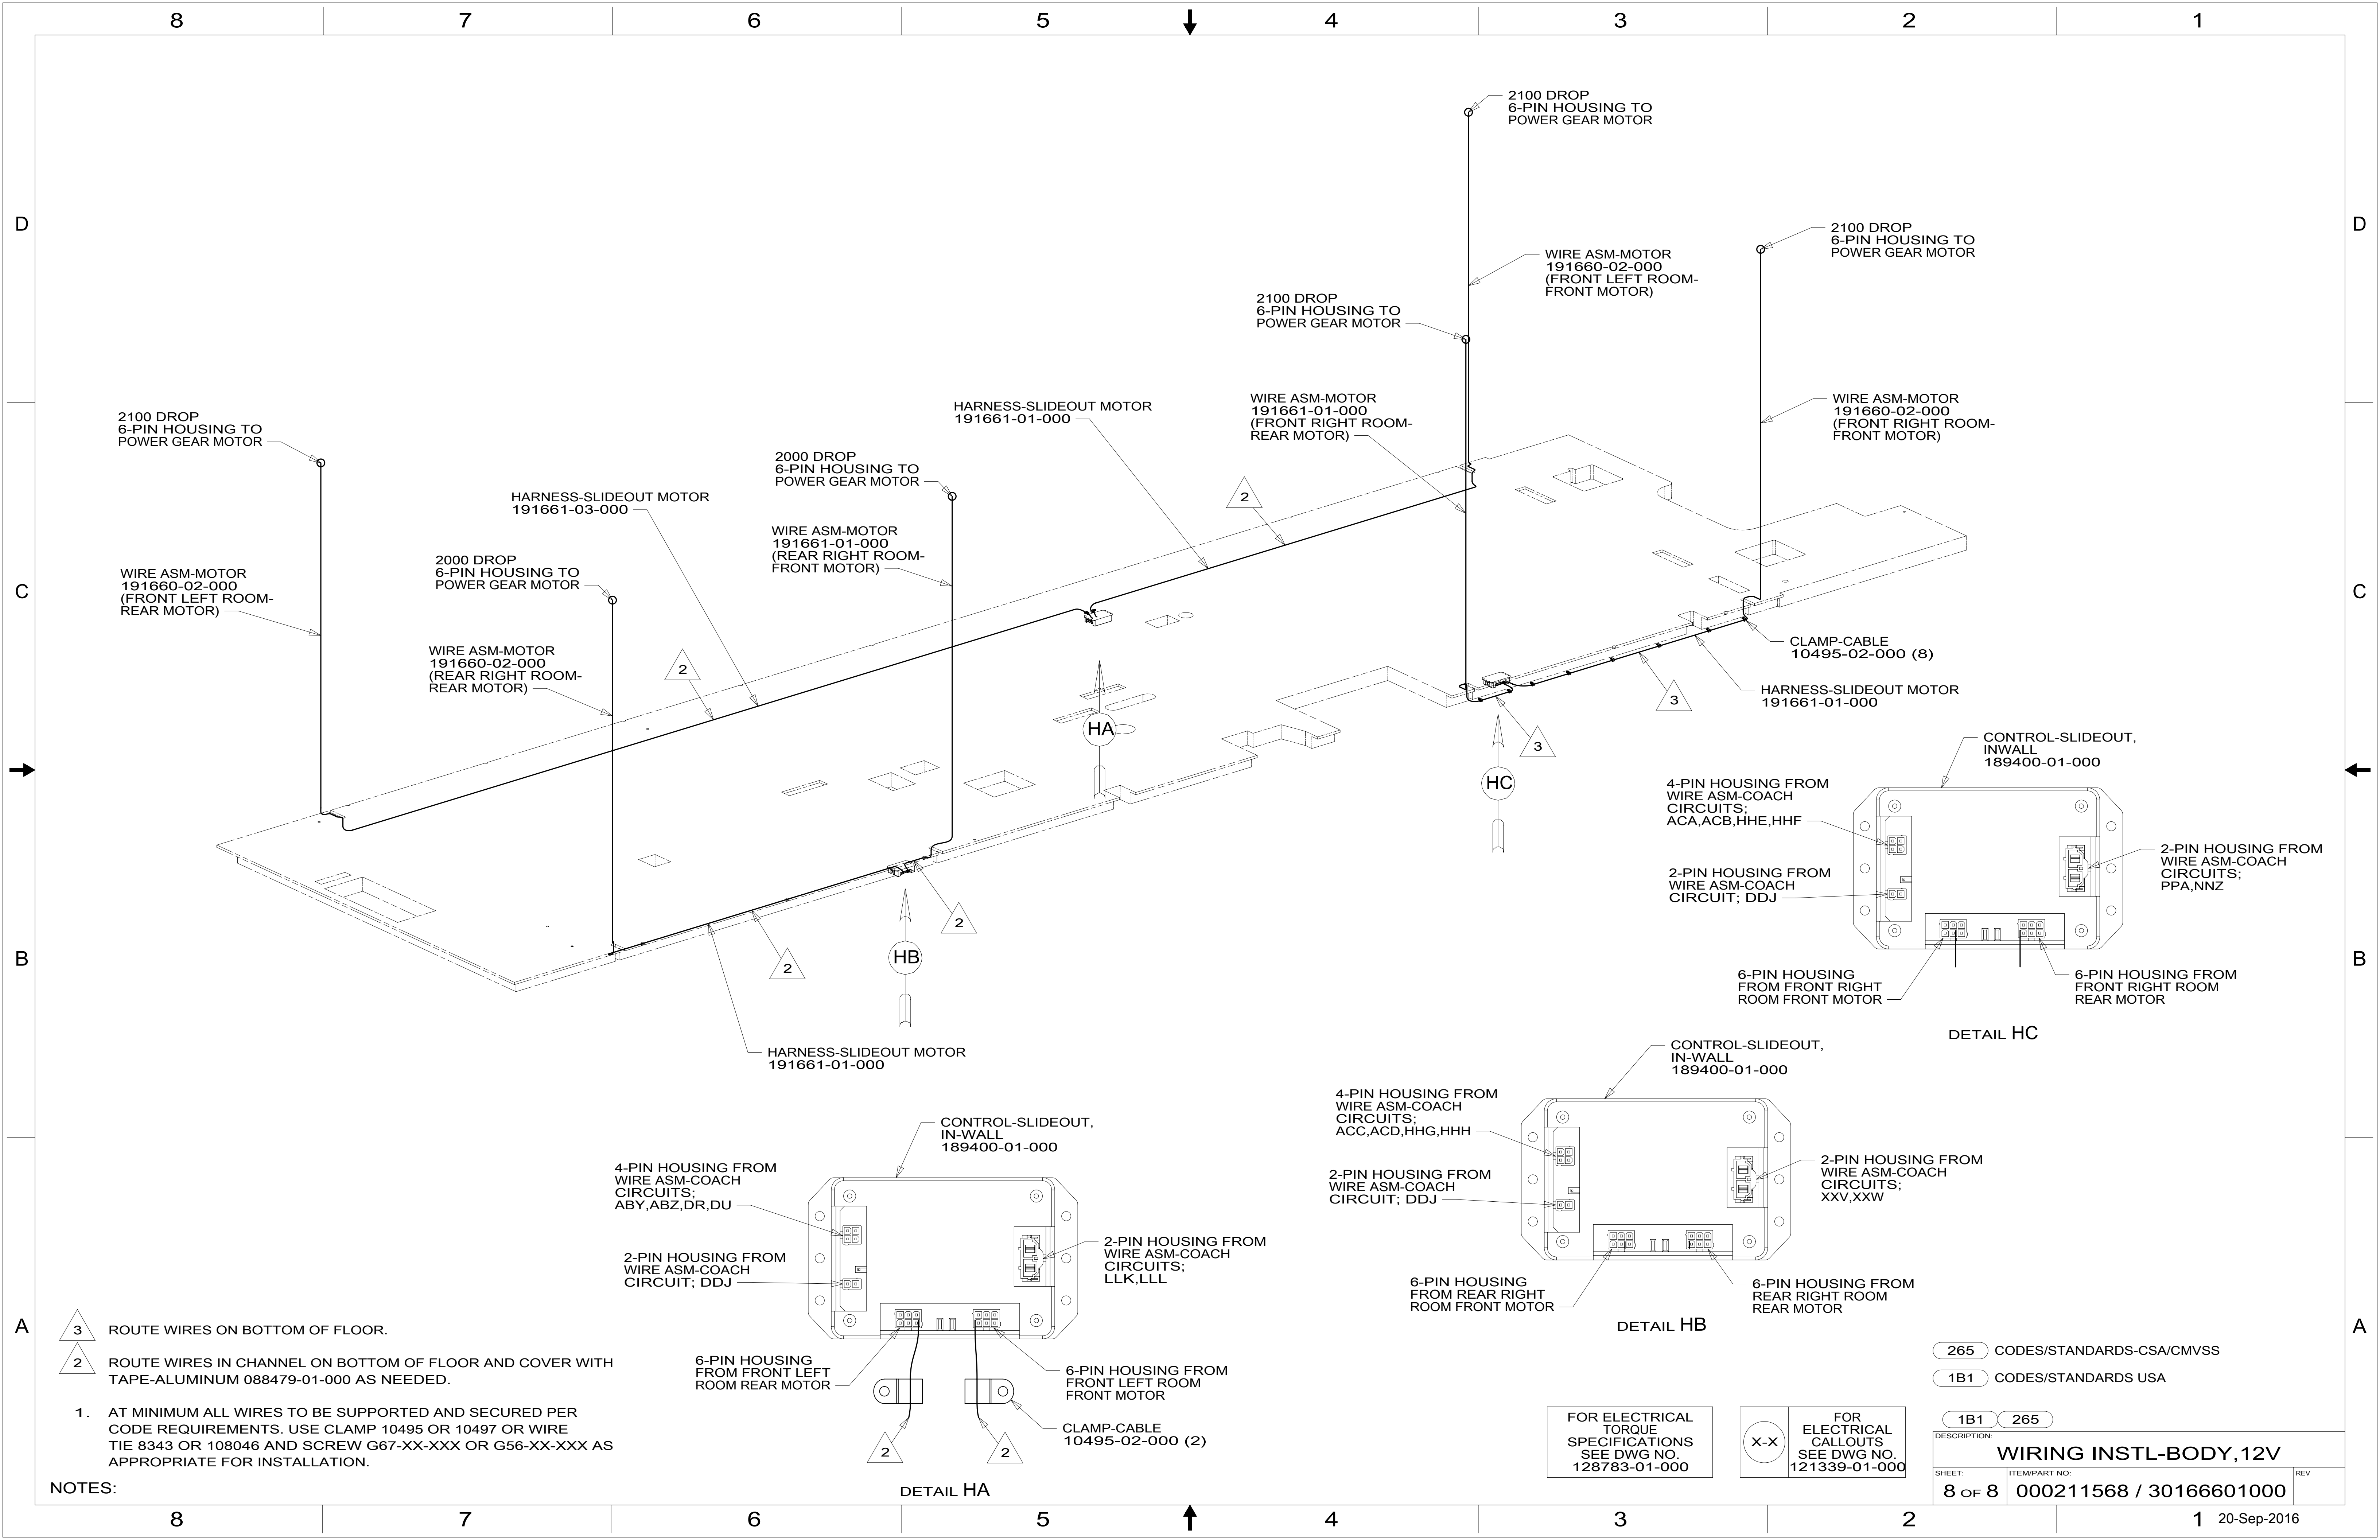

- 3 ROUTE WIRES ON BOTTOM OF FLOOR.
- 2 ROUTE WIRES IN CHANNEL ON BOTTOM OF FLOOR AND COVER WITH TAPE-ALUMINUM 088479-01-000 AS NEEDED.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS  
 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: <b>WIRING INSTL-BODY, 12V</b>		
SHEET: <b>8 OF 8</b>	ITEM/PART NO.: <b>000211568 / 30166601000</b>	REV