

LOAD CENTER-120/240,50A
187504-01-000
WIRE TIE
116673-01-000 $\triangle 8$
SCREW
G67-10-12U (4)

HOLD DOWN
BREAKER BRACKET

CIRCUIT BREAKER 30A
187505-03-000

CIRCUIT BREAKER-15/20A
187505-05-000 (2)

CIRCUIT BREAKER-15/15A
187505-04-000

8 GA BLK
FROM SCRAP
(180 MM)

ALL NEUTRALS


ALL GROUNDS

GROMMET
008385-01-000

GROUND MAIN


$\triangle 1$ LABEL-CONTROL CENTER
000121442 / 323041-01-CHT

LOAD CENTER-COVER
187504-02-000 $\triangle 1$

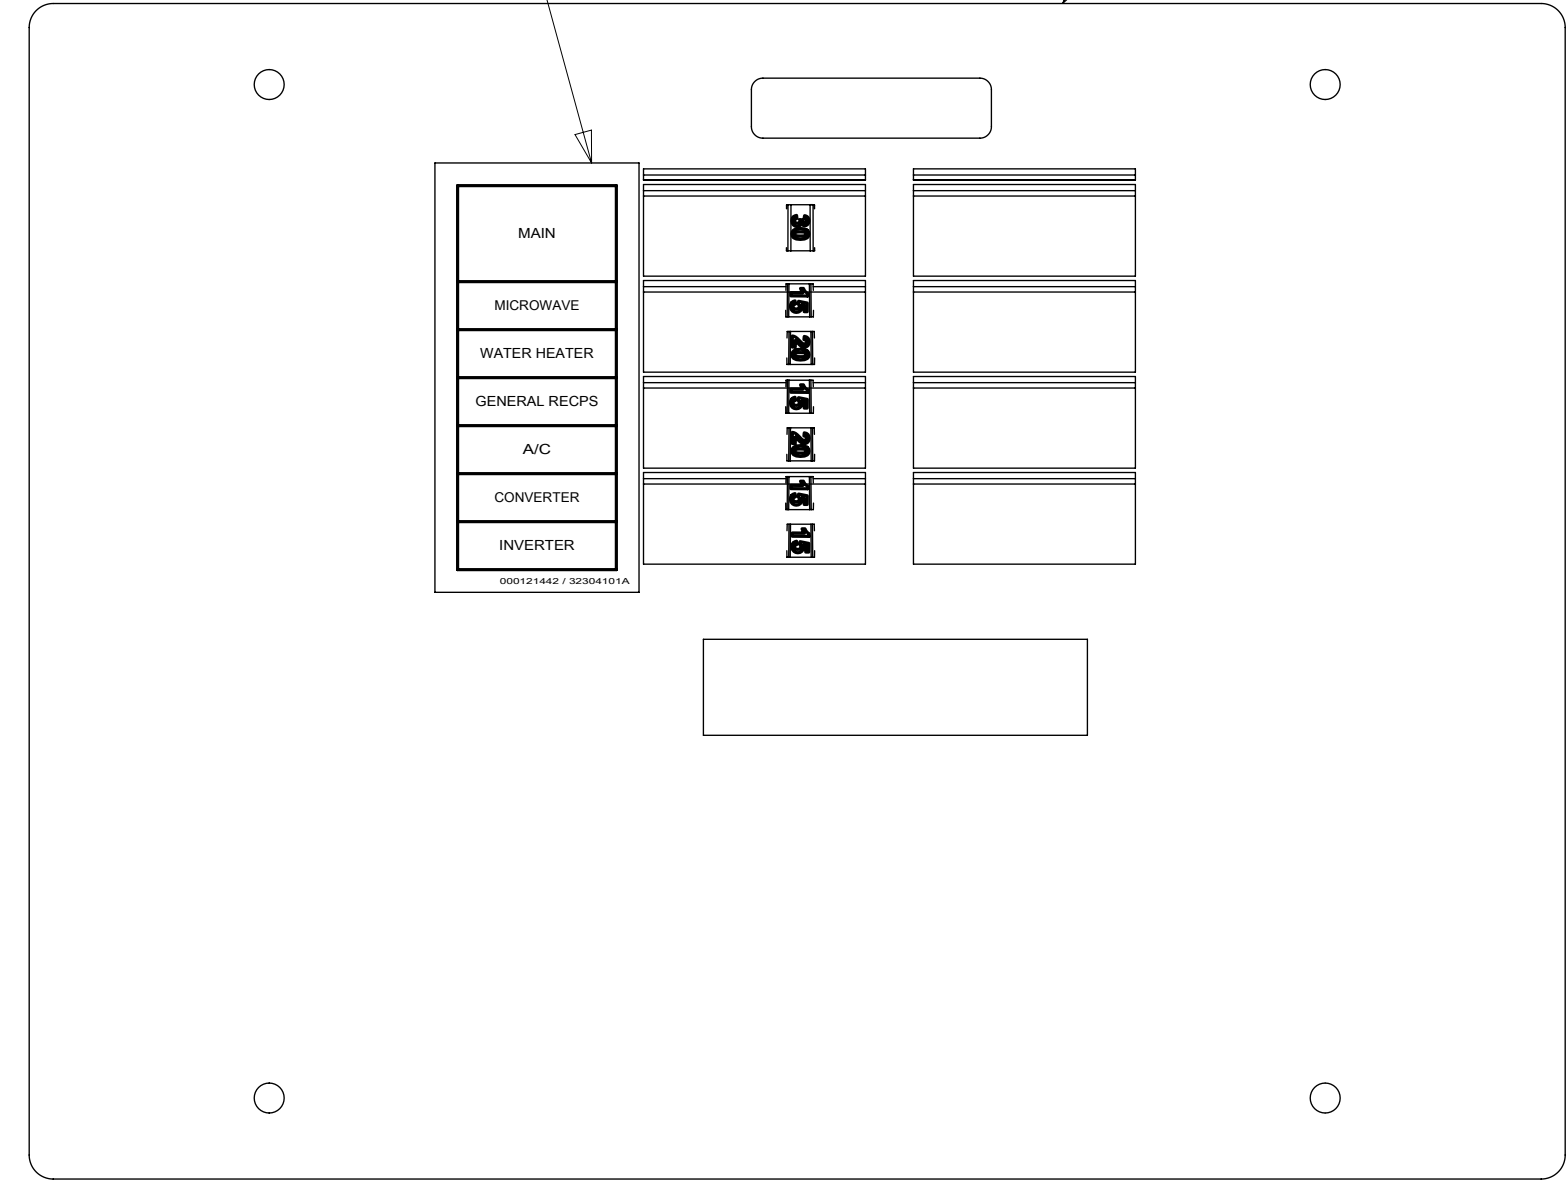

LINE
ENT

YEL
ORG
BLU
RED
BLK
WHT

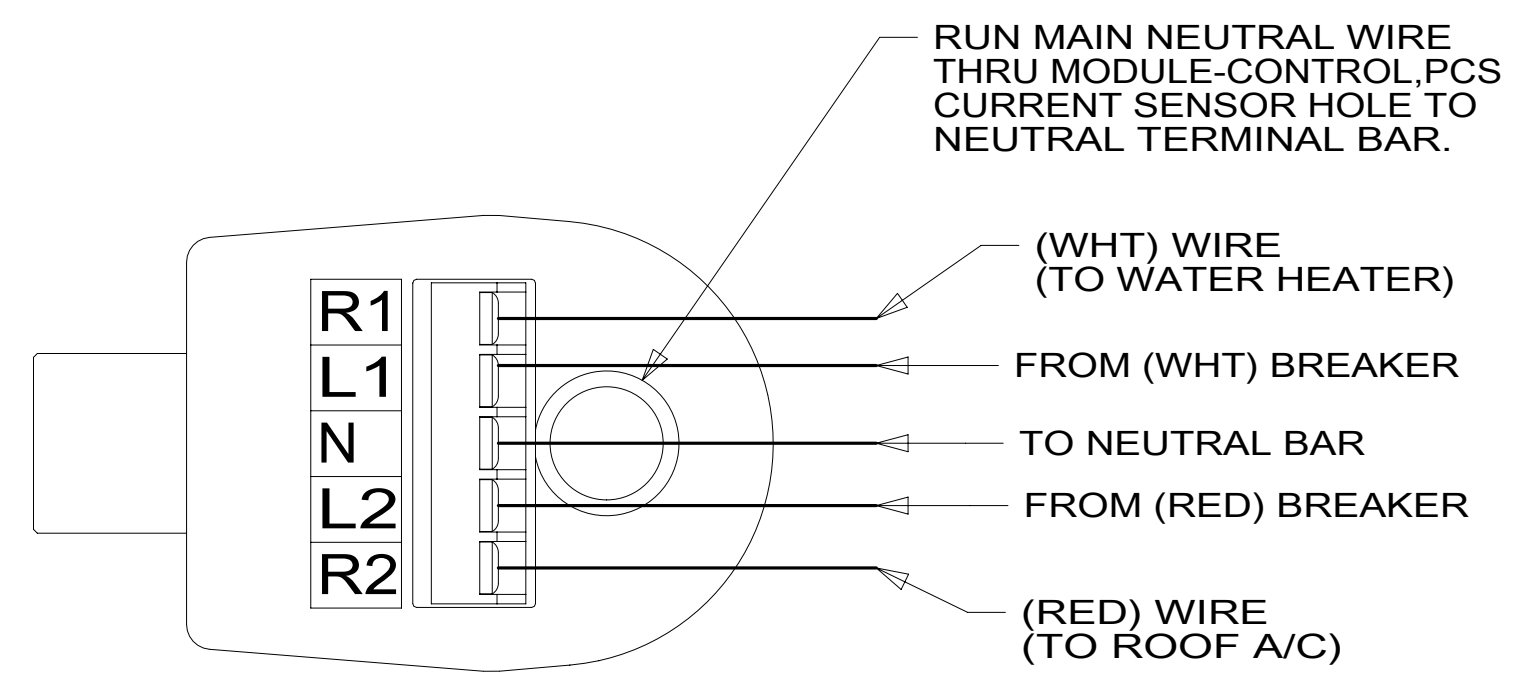

DETAIL BA

- $\triangle 8$ ATTACH TO UNUSED SCREW HOLE ON BACK SIDE OF PANEL TO SECURE WIRES.
- 7. SEE WIRING INSTL-BODY, 110V FOR ADDITIONAL INFORMATION.
- 6. ALL 110V STRANDED WIRE WITHOUT TERMINALS TO BE STRIPPED 10 MM AND SOLDER DIPPED.
- 5. REMOVE 400 MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS.
- 4. ALL WIRES TO BE CLAMPED WITHIN 200 MM OF ATS.
- 3. GROUND WIRES ARE NOT SHOWN FOR CLARITY.
- 2. ALL GROUNDS TO BE COVERED WITH TUBING 8041-02-000.
- $\triangle 1$ INSTALLED BY ASSEMBLY LINE.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

$\square 265$ CODES/STANDARDS-CSA/CMVSS
 $\square 1B1$ CODES/STANDARDS USA

$\square 1B1$ $\square 265$



DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			18 170B
DESCRIPTION: LOAD CENTER ASM			
SHEET:	ITEM/PART NO:	REV	
1 OF 1	000121439 / 32304201000		