

WIRE ASM-SOLAR CHASSIS
000204355 / 338332-01-000

CABLE ASM-(YEL)
COACH BATTERY
DISCONNECT SUPPLY 1

4 PIN HOUSING
TO ELECTRIC STEP

BATTERY INSTL
000204353 / 338331-01-000

HT FROM WIRE ASM-SOLAR CHASSIS

WIRE ASM-GROUNDS
178545-01-080 12D
136145-01-080 073 OR 258

GROUNDS
DETAIL BB

BARE ENDS OF
WIRE ASM-GROUNDS
TO LOAD CENTER

MAIN DROP
TO WIRE ASM-COACH

GROMMET
23942-02-000
SEAL

CABLE ASM-(RED)
CHASSIS BATTERY

SEAL-TRIM
113452-02-000
(153 MM) 8

INVERTER CABLES 1 401

TO FORD SUPPLIED
TAILLAMP CIRCUITS

TO COMPT LIGHT

TO SLIDEOUT MODULE

TO REAR RIGHT
SLIDEOUT REAR
MOTOR

COIL WIRE DROP TO
SLIDEOUT ROOM HERE
FOR FUTURE ROUTING
IN MHP

4 BUTT SPLICES
TO FURNACE

7 PIN HOUSING
TO TRAILER
CONNECTOR

TO GROUND BOLT

8 PIN HOUSING
TO BACKWALL

CABLE ASM (GRN)
GENERATOR 1

8 PIN HOUSING
TO GENERATOR

SEAL-TRIM
113452-02-000
(153 MM) 8

COIL WIRE DROP TO
SLIDEOUT ROOM HERE
FOR FUTURE ROUTING
IN MHP

TO COMPT LIGHT

ROUTE HS FROM WIRE ASM-SOLAR CHASSIS
INTO CHASSIS ELECTRICAL BOX

MISC HOUSINGS
FROM WIRE ASM-CHASSIS
ROUTED THROUGH FRONT
HOLE IN COMPT

CHASSIS ELECTRICAL BOX ASM
000202565 / 337659-01-000

GROMMET
23942-01-000 (7)
SEAL

CABLE ASM (BLU)
LEVEL SYSTEM POWER CABLE

ENGINE GROUND CABLES 10 9

GROUND STUD NUT
D39-05-00B

TOP OF RAIL

CHASSIS SUPPLIED
POSITIVE BATTERY
CABLES 10 7

FUSE HOLDER
188460-01-000
FUSE-200 AMP
188461-05-000
SCREW
G42-04-16U (2)

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

VIEW AA

- 10 SUPPLIED WITH CHASSIS.
- 9 CUT CHASSIS SUPPLIED BATTERY CABLE 700MM FROM BATTERY TERMINAL AND ADD TERMINAL 8348-01-000 TO CUT END.
- 8 COVER SHARP EDGES WHERE WIRE CROSSES FRAME RAILS.
- 7 CUT CHASSIS SUPPLIED POSITIVE BATTERY CABLE 150MM FROM BATTERY TERMINAL END. DISCARD TERMINAL END AND ADD TERMINAL 113738-01-000 TO CUT END. COIL EXCESS ALONG FRAME RAIL JUST BEHIND RADIATOR AND TIE UP WITH TIE-WIRE 8343-04-000.
- 6 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 5 CLAMP 83610-01-000, SCREW G11-10-16B.
- 4. WIRE TIE 8343-04-000. FASTEN EVERY 600MM MINIMUM.
- 3. ALL DIMENSIONS ARE FROM DATUM UNLESS OTHERWISE SPECIFIED.
- 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
- 1 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

- 258 A/C DEVIATION -2 A/C
- 401 INVERTER-DC/AC, 1000 WATT
- 073 COOLING UPGRADE PACKAGE
- 12D ELECTRICAL SYSTEM 30 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.	
DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DIFTR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED:
	21 E32M
WIRING INSTL-CHASSIS	
SHEET: 1 OF 2	ITEM/PART NO: 000204044 / 33825601000
REF:	1 15-Jul-2021

8 7 6 5 4 3 2 1

D

D

C


C

B


B

A

A

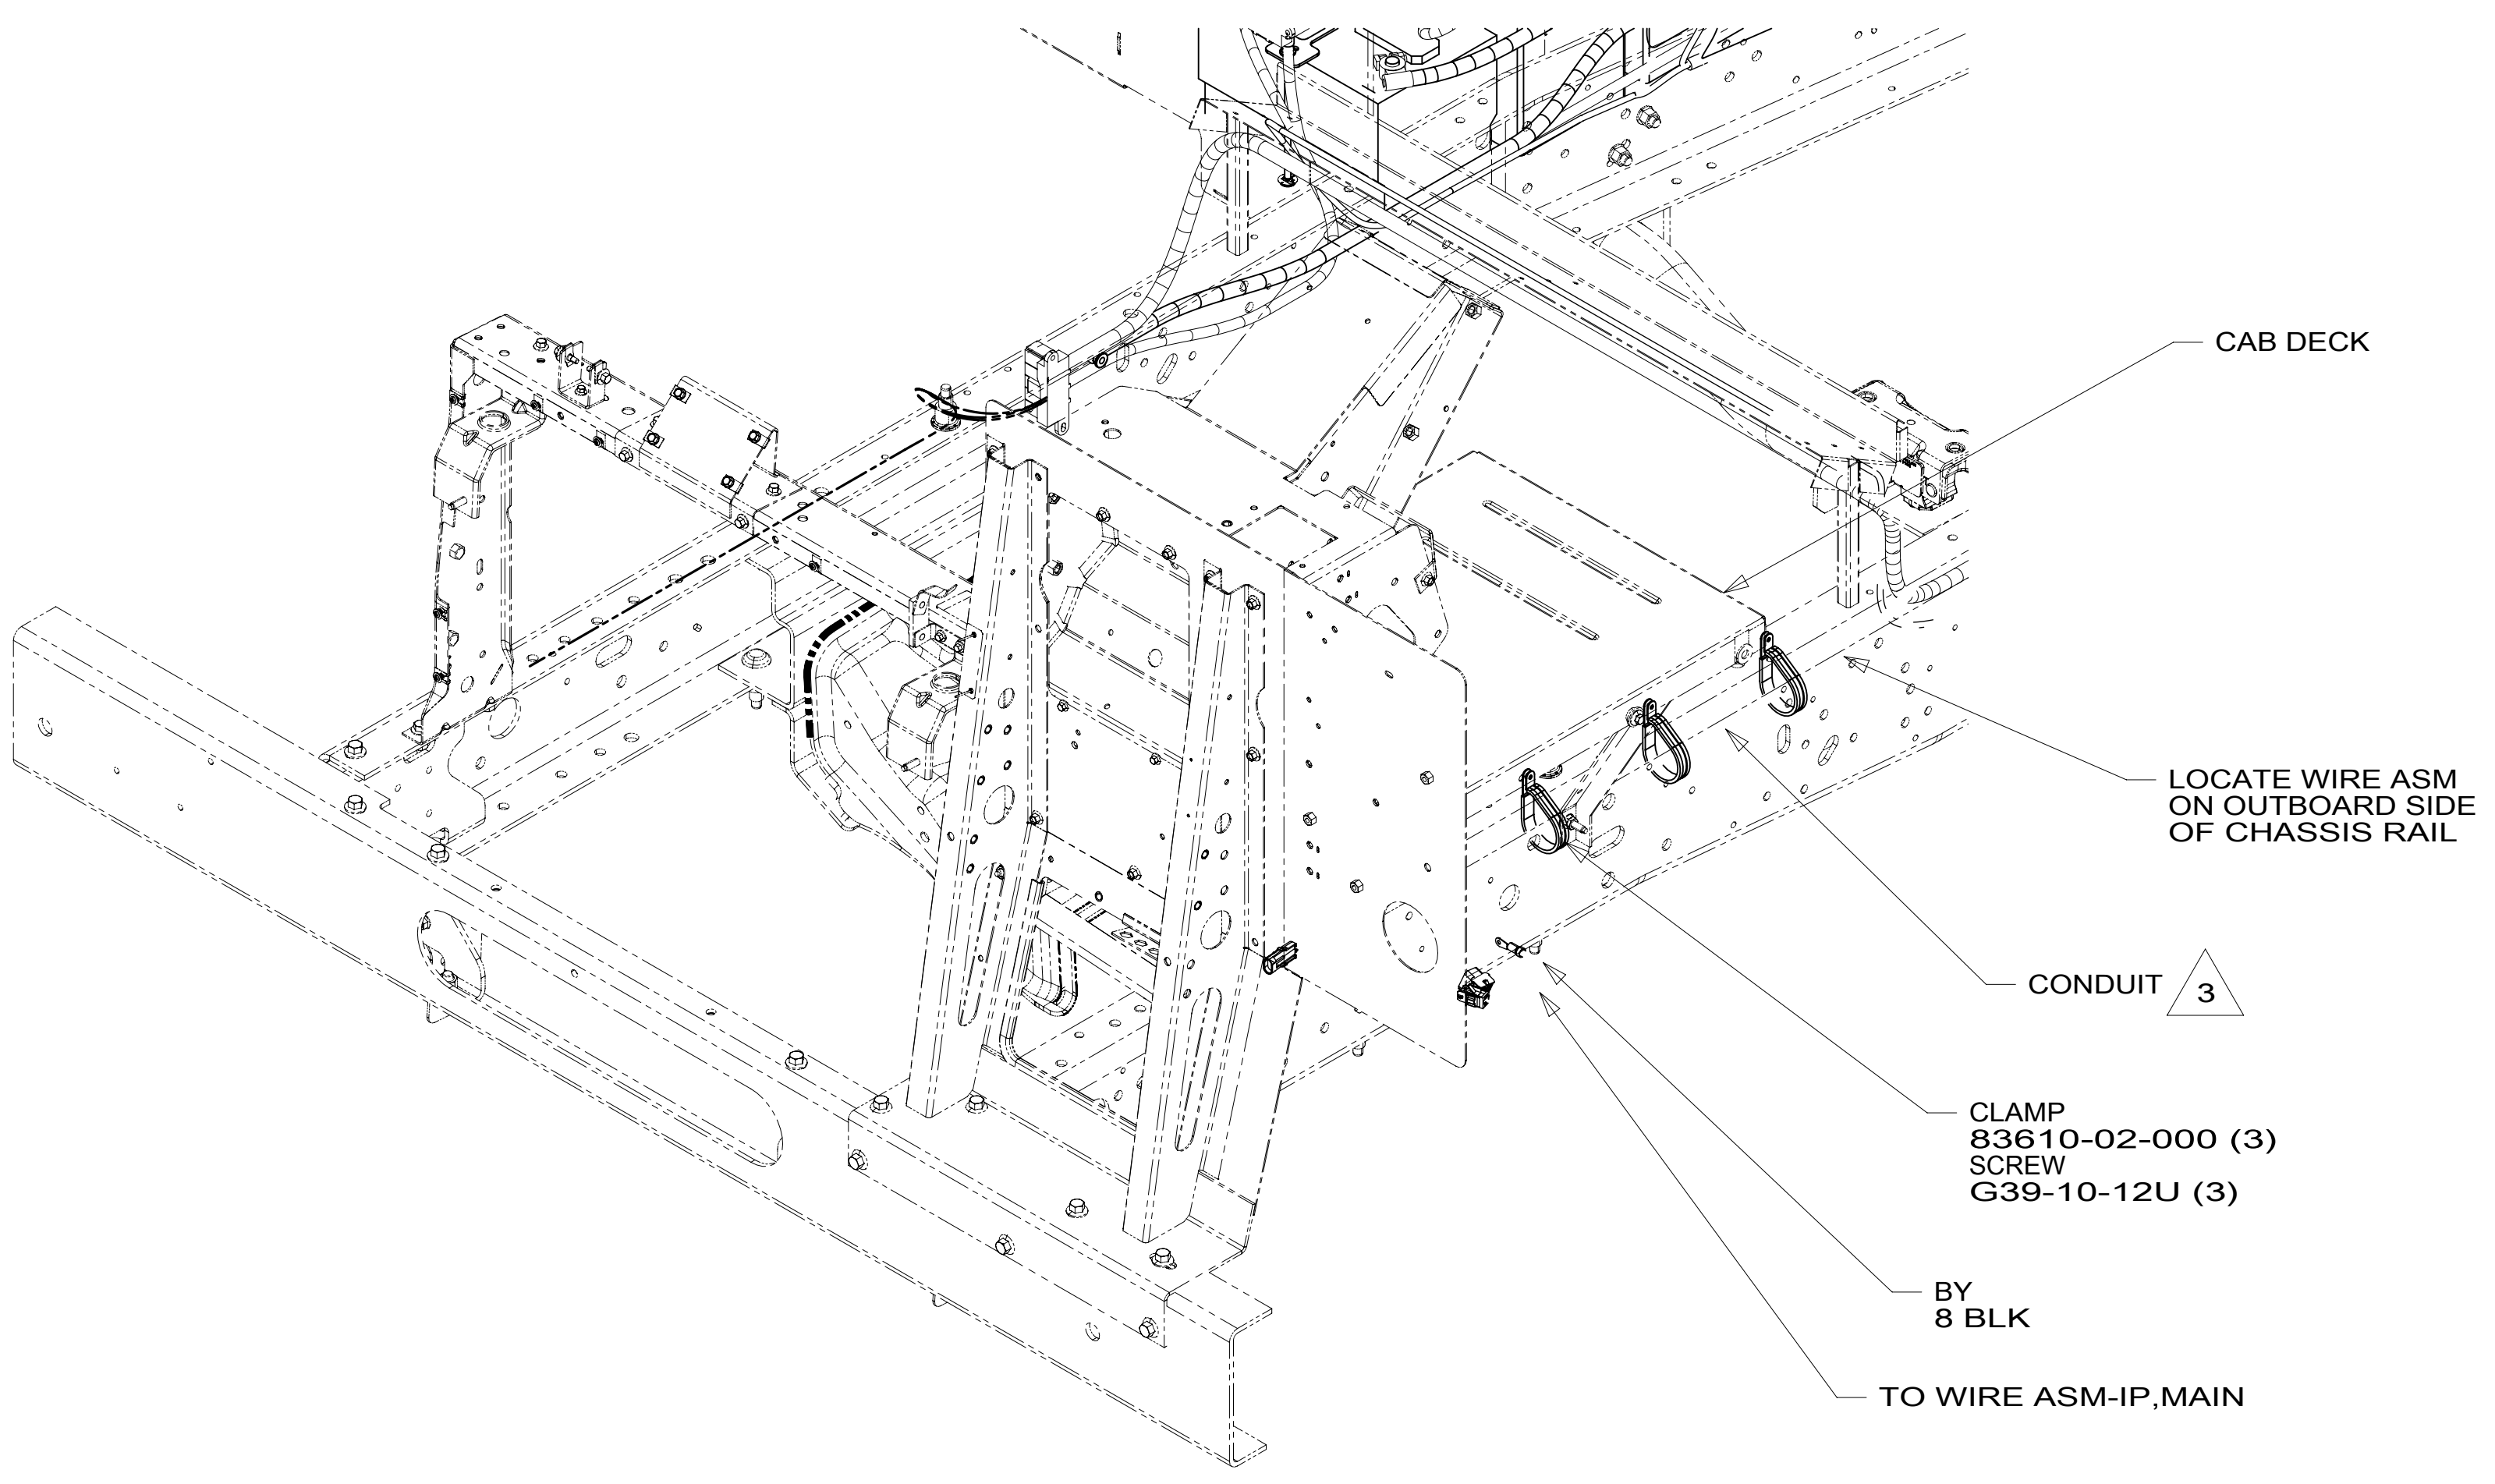

VIEW BA

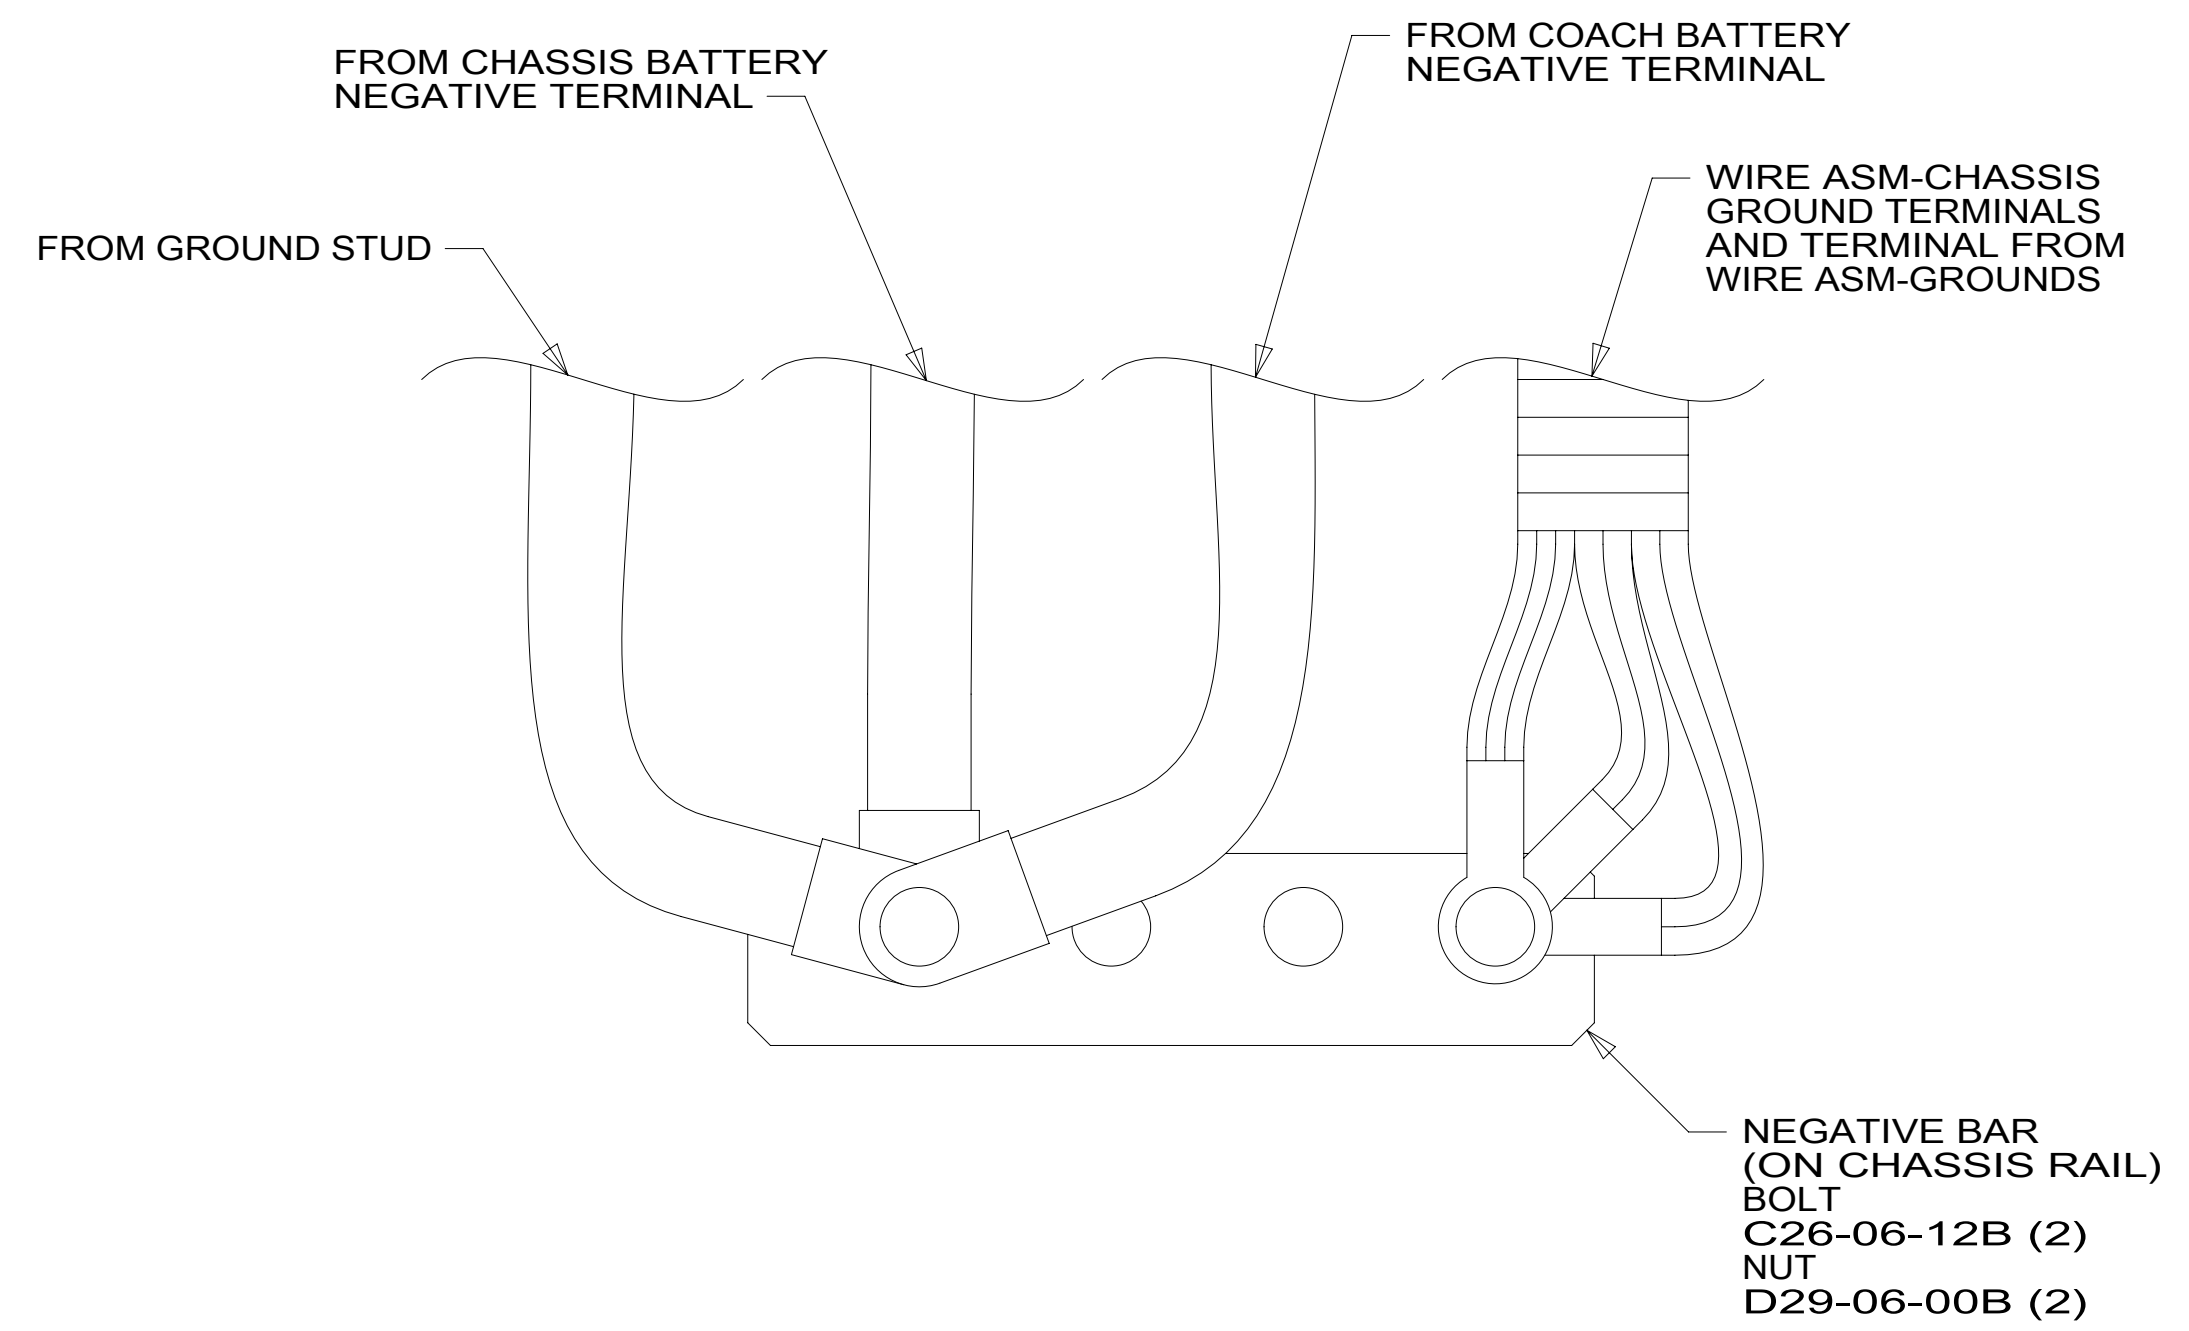

DETAIL BB

3 COVER WITH CONDUIT 41953-10-000 AND 41953-11-000 AS REQUIRED.

2. CONNECT CABLES TO COACH SIDE OF BATTERY DISCONNECT WHEN BATTERY DISCONNECT IS USED.

1. CUT OFF EXCESS END OF WIRE TIE.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: WIRING INSTL-CHASSIS

SHEET: 2 OF 2 ITEM/PART NO: 000204044 / 33825601000 REV

8 7 6 5 4 3 2 1 15-Jul-2021