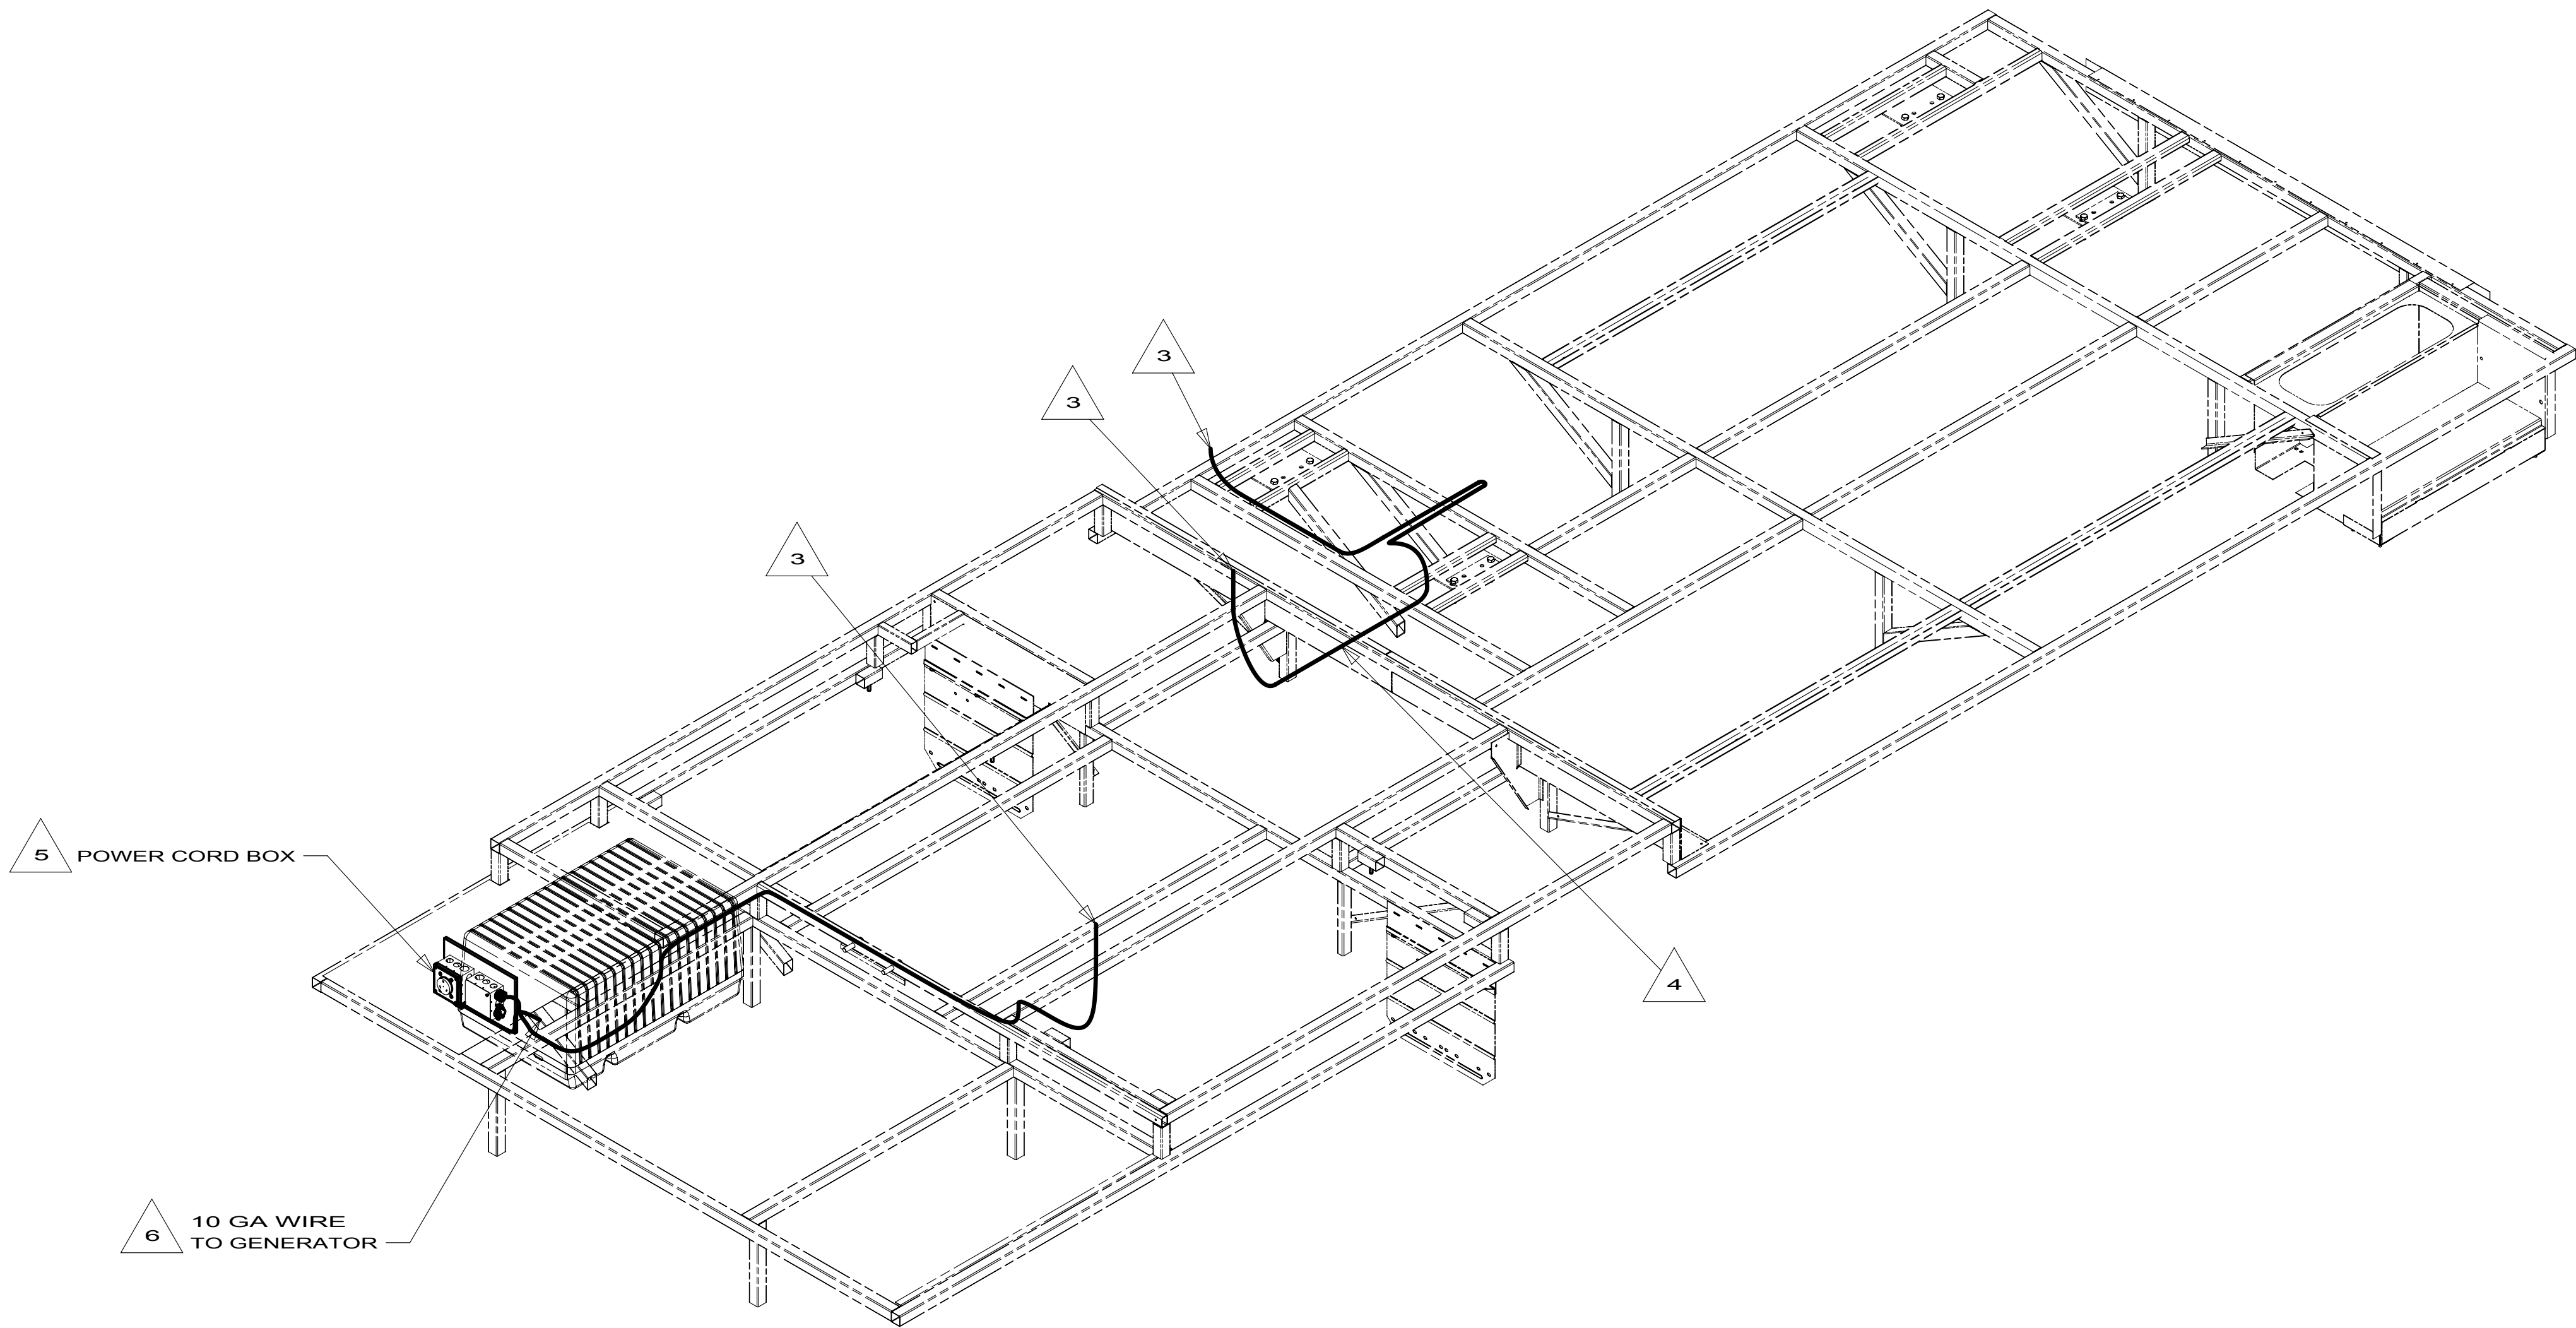


DRAWING NO.	FEATURE
173196-01	-----
173196-11	1B112D
173196-15	26512D

173196



12DELECTRICAL SYSTEM 30 AMP

265CODES/STANDARDS-CSA/CMVSS

1B1CODES/STANDARDS USA

1B1265

6SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.

5SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

4CORD IS PART OF WIRE ASM-CHASSIS.

3ROUTE WIRE THRU FLOOR.

2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 010497-05-000
WITHIN 200MM OF OUTLET BOXES, USE SCREW 000G67-10-12B.

1. ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR
WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX
OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

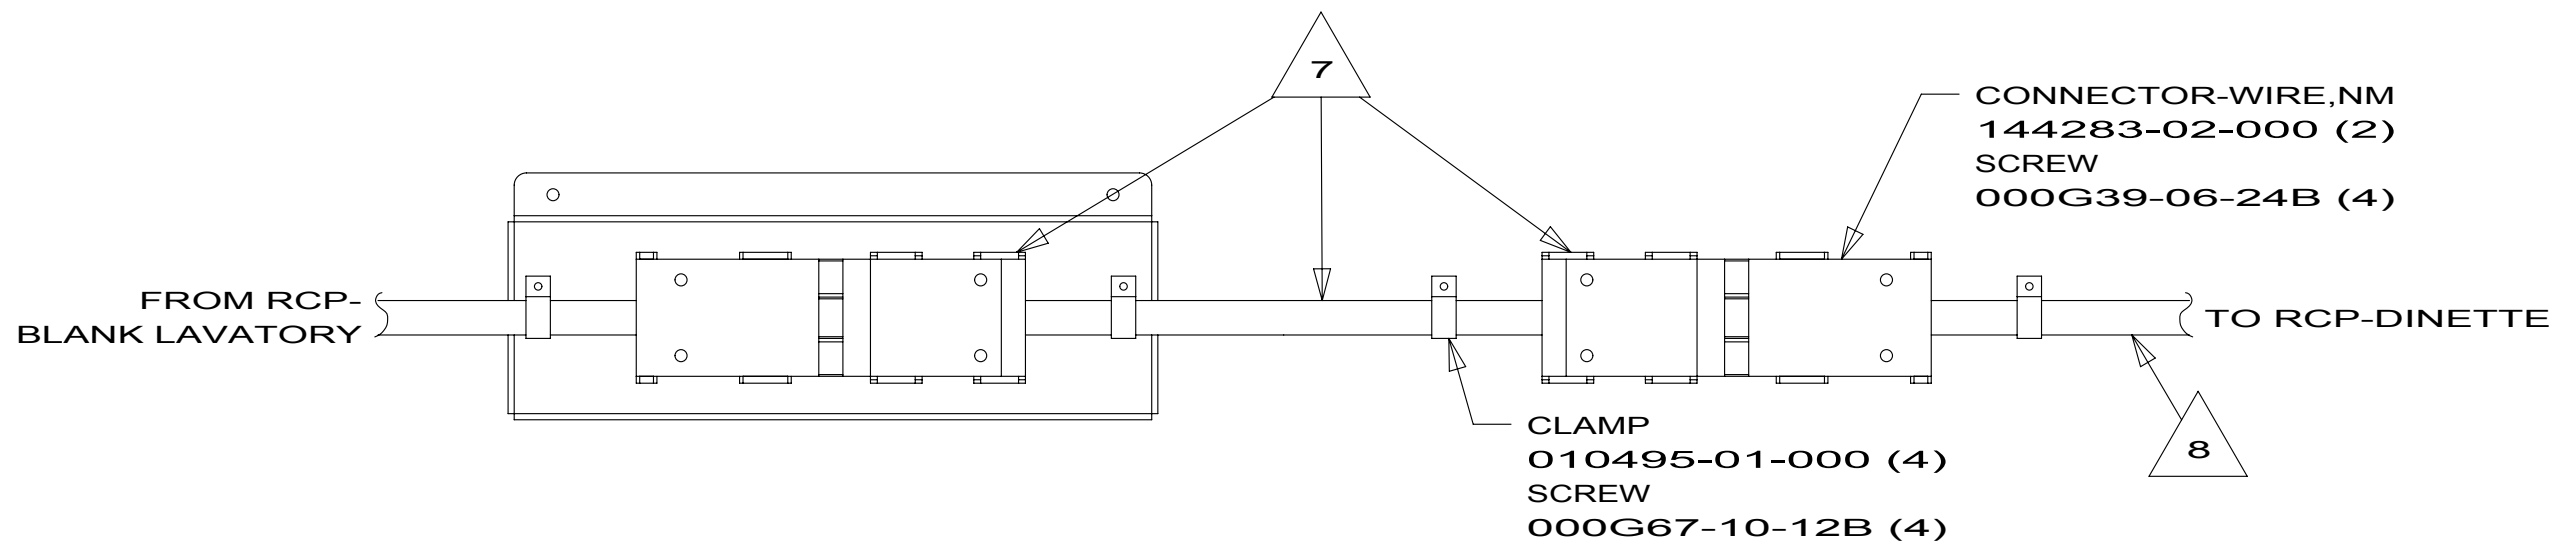
FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


10 231C

WIRING INSTL-BODY,110V

1 3 173196



DETAIL BA

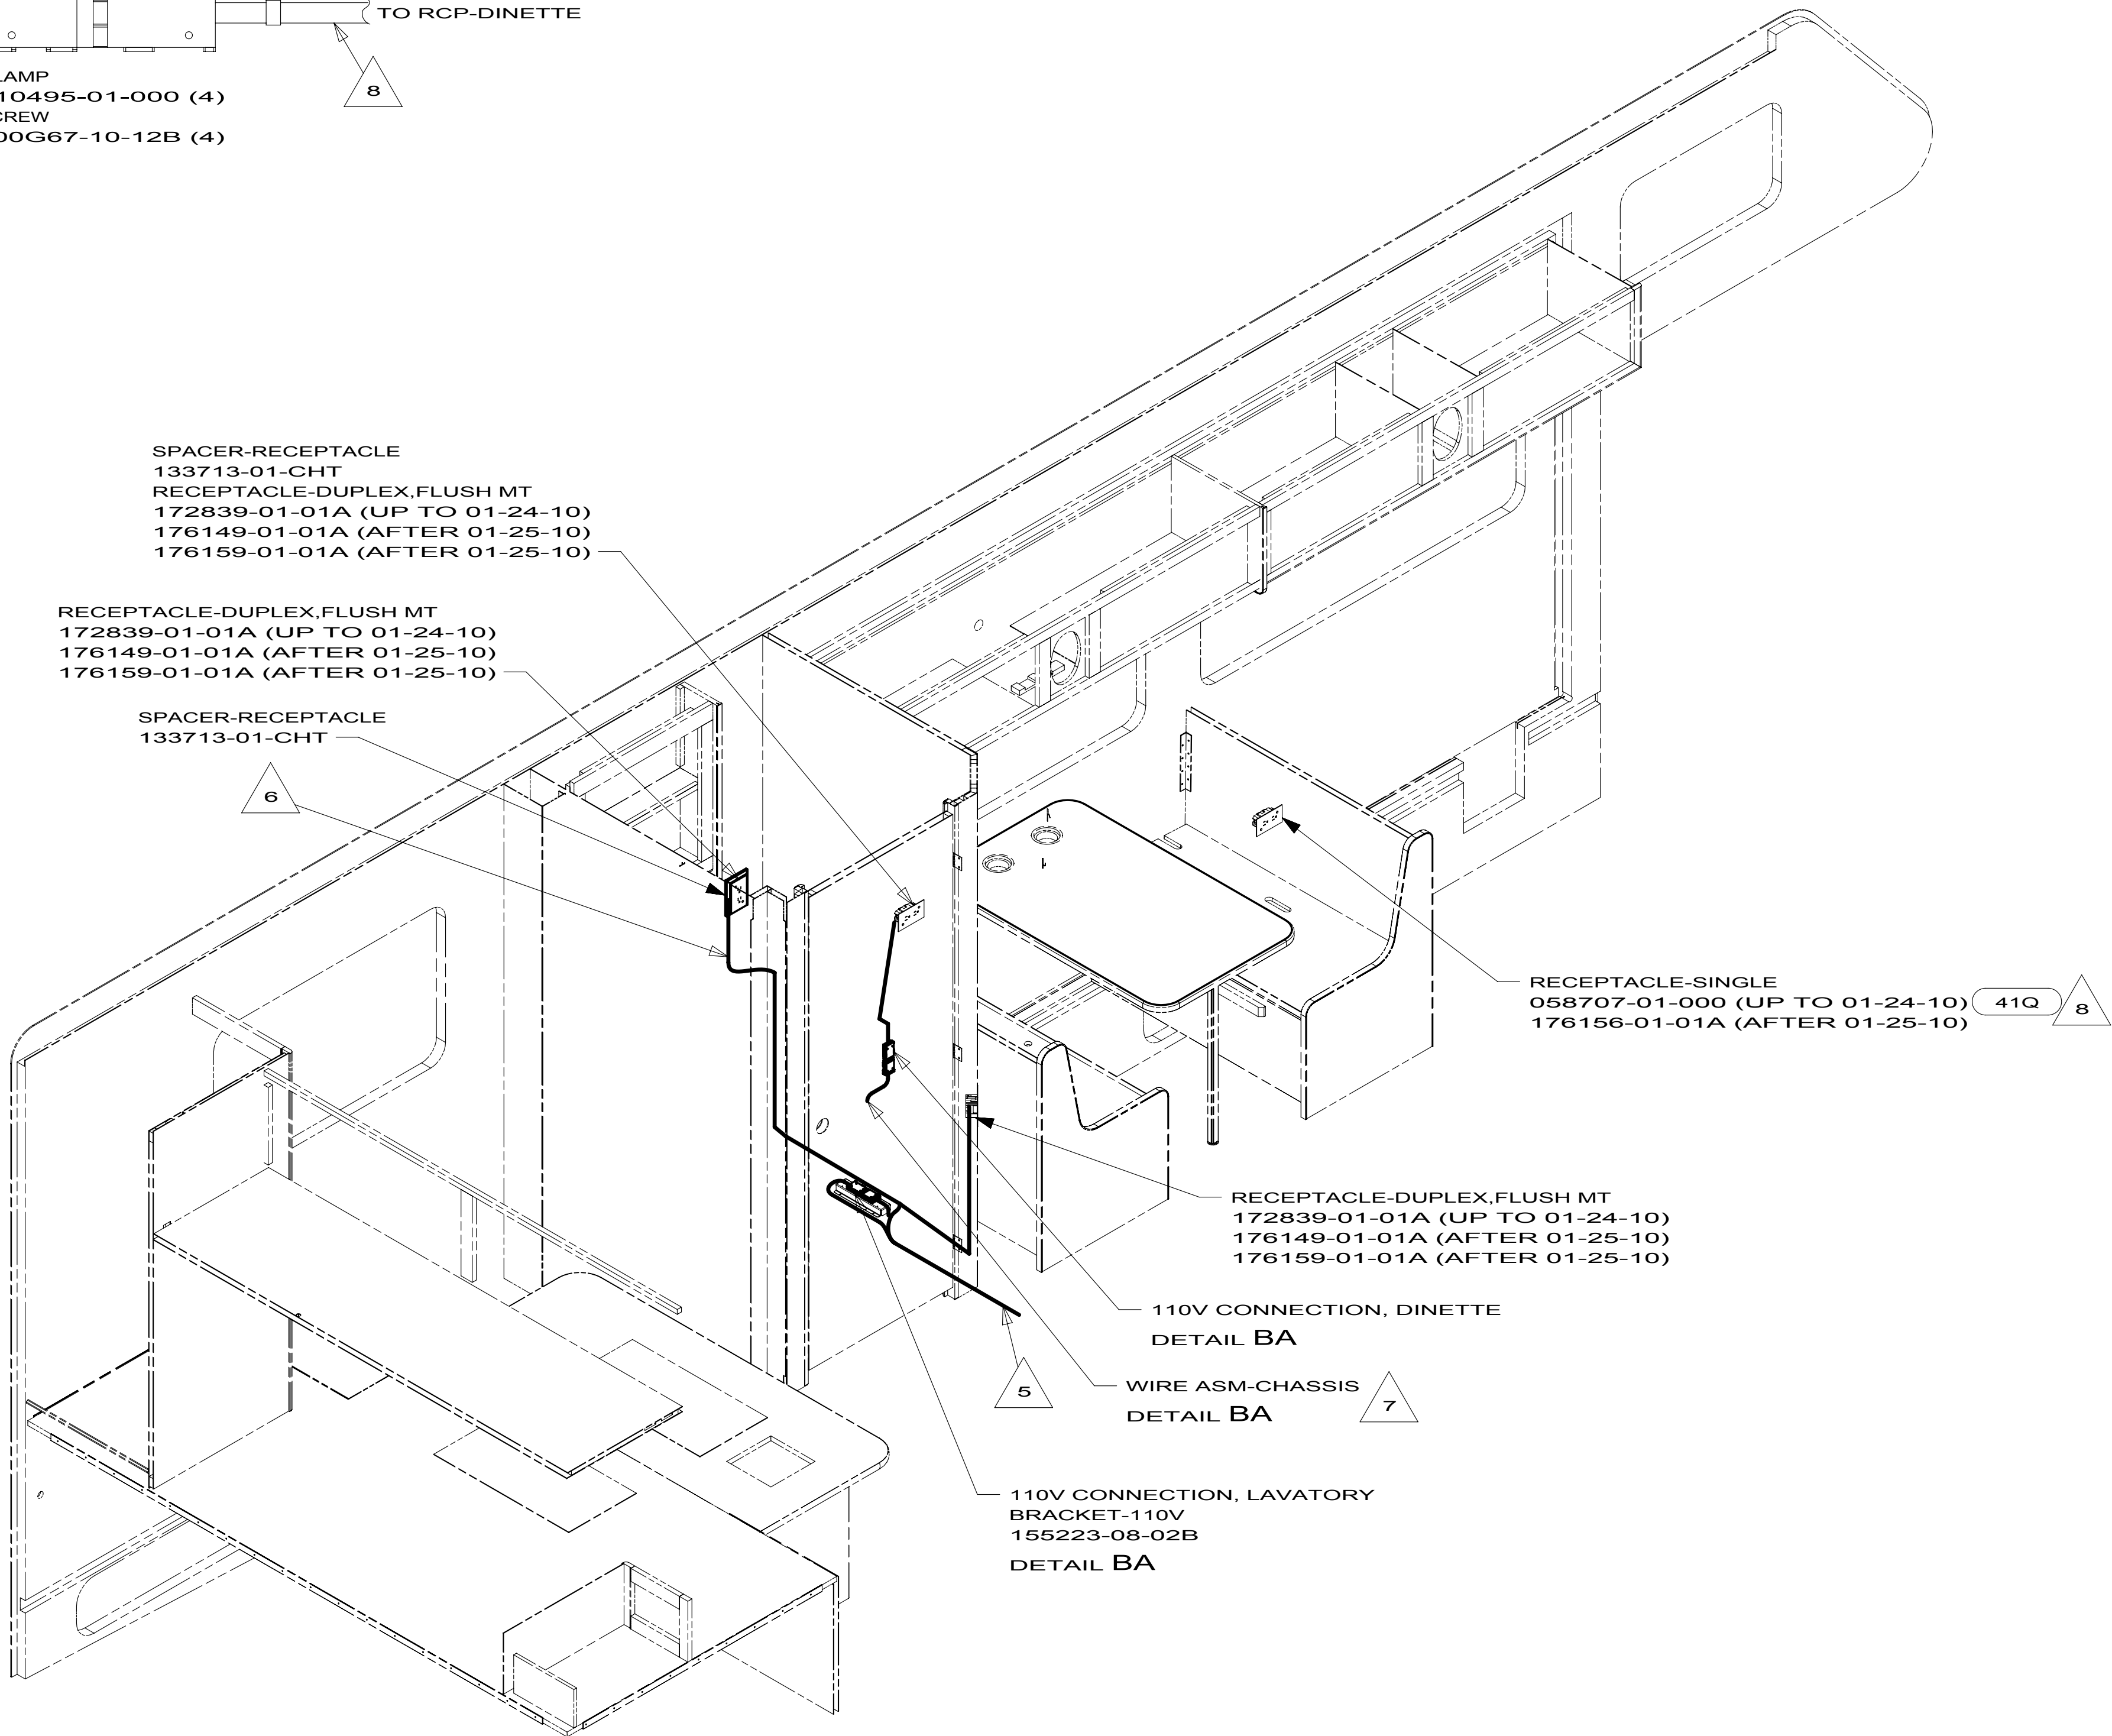

- 8 WIRE IN SIDEWALL.
- 7 CORD & CONNECTORS ARE PART OF WIRE ASM-CHASSIS.
- 6 ROUTE WIRE THRU SIDEWALL.
- 5 ROUTE WIRE THRU FLOOR.
4. FOR MORE INFORMATION SEE WIRING DIAGRAM-BODY,110V.
3. ALL GROUND WIRE TO BE COVERED WITH TUBING 008041-02-000.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 010497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW 000G67-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

- 41Q SOFA/SLEEPER-ULTRALEATHER HP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

10 231C

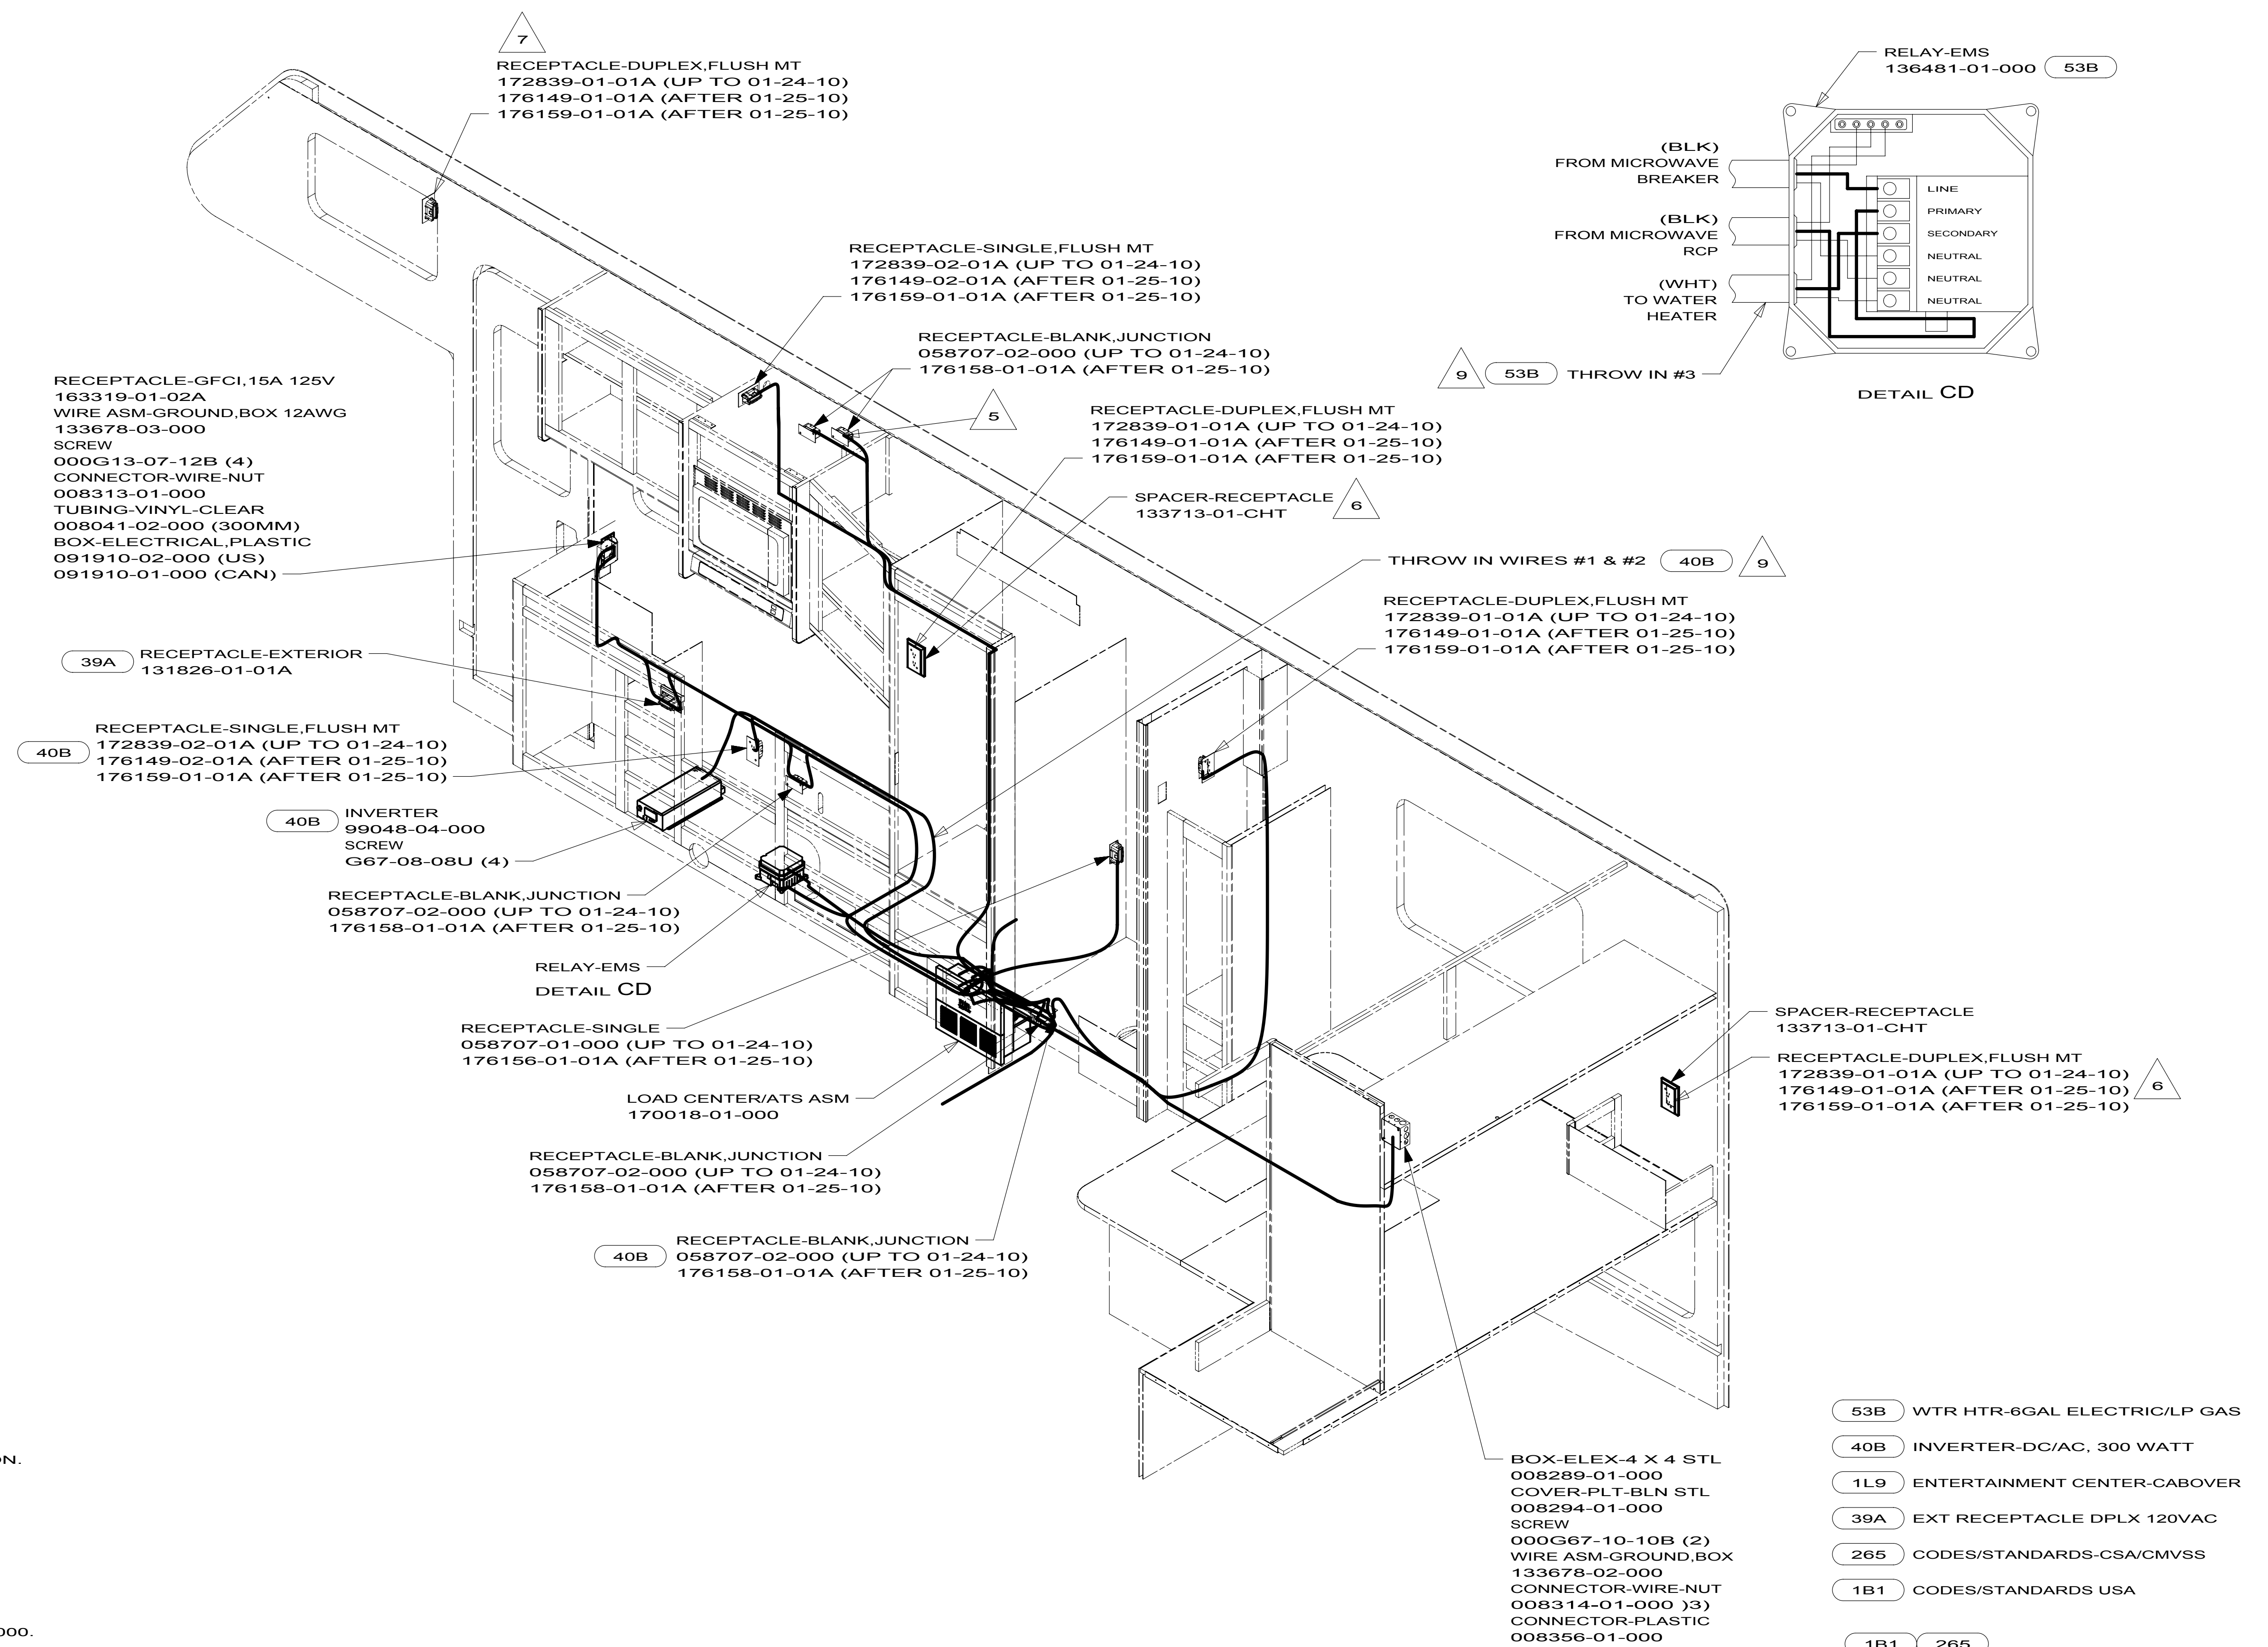
WIRING INSTL-BODY,110V

2

173196

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



- 9 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
 - 8 NOT USED WITH 1L9
 - 7 SEE WIRING INST-TV/DVD,SIDE FOR ADDITIONAL INFORMATION.
 - 6 WIRE ROUTED IN SIDEWALL.
 - 5 WIRE IN ROOF.
 - 4 ROUTE WIRE THRU FLOOR.

3. ALL GROUND WIRE TO BE COVERED WITH TUBING 008041-02-000.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 010497-05-000
WITHIN 200MM OF OUTLET BOXES, USE SCREW 000G67-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR
WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX
OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

10 231C

WIRING INSTL-BODY,110V

3

173196

KEY	PART NUMBER	U/M DESCRIPTION	083208-07-000 VENDOR NO.
	083208-06-701	EA CONVERTER ONLY (LOWER UNIT)	7345R

		329B		331C
GROUND	8-G	136145-02-015		136145-02-022
WIRE ASM 110V US		170895-01-000		170199-01-000
WIRE ASM 110V CA		170895-02-000		170199-02-000
GENEARATOR CABLE ASM	UL	136137-01-025		X
	CA	136138-01-025		X
THROW-IN #1	UL	136135-09-040 53Z		136135-09-020 53Z
	CA	136136-09-040 53Z		136136-09-020 53Z
THROW-IN #2	UL	X		136131-03-025
	CA	X		136134-03-025
THROW-IN #3	UL	X		X
	CA	X		X
THROW-IN #4	UL	X		X
	CA	X		X
THROW-IN #5	UL	X		X
	CA	X		X
THROW-IN #6	UL	X		X
	CA	X		X
THROW-IN #7	UL	X		X
	CA	X		X
SLIDEOUT WIRE #1	UL	136151-03-017 3		136151-03-020 3
	CA	136151-03-017 3		136151-03-020 3
SLIDEOUT WIRE #2	UL	X		X
	CA	X		X
MAIN EXTENSION	UL	X		X
	CA	X		X
CONDUIT		X		X

40N

40N

		224V	229T	231C	231N	231J
GROUND	8-G	136145-02-016	136145-02-012	136145-02-022	136145-02-024	136145-02-021
WIRE ASM 110V US		168359-01-000	168226-01-000	165476-01-000	169106-01-000	168597-01-000
WIRE ASM 110V CA		168359-02-000	168226-02-000	165476-02-000	169106-02-000	168597-02-000
GENEARATOR CABLE ASM	UL	8022-01-000 (4400)	X	X	X	X
	CA	24743-01-000 (4400)	X	X	X	X
CONDUIT		91234-01-000 (4000)	X	X	X	X
THROW-IN #1	UL	136135-09-067 53B	136135-09-050 53B	136131-03-012 40B	136151-03-028 3	136135-09-035 53B
	CA	136136-09-067 53B	136136-09-050 53B	136131-03-012 40B	136151-03-028 3	136136-09-035 53B
THROW-IN #2	UL	136131-02-012 1MB	X	136131-04-015 40B	136131-05-018 2	136131-03-003 2
	CA	136134-02-012 1MB	X	136134-04-015 40B	136134-05-018 2	136134-03-003 2
THROW-IN #3	UL	X	X	136135-09-018 53B	136135-09-022 53B	136131-03-071 2
	CA	X	X	136136-09-018 53B	136136-09-022 53B	136134-03-071 2
THROW-IN #4	UL	X	X	X	136131-03-050 2	X
	CA	X	X	X	136134-03-050 2	X
MAIN EXTENSION	UL	X	8022-01-000 (3400)	8022-01-000 (4000)	8022-01-000 (4600)	8022-01-000 (3500)
	CA	X	24743-01-000 (3400)	24743-01-000 (4000)	24743-01-000 (4600)	24743-01-000 (3500)
CONDUIT		X	91234-01-000 (3000)	91234-01-000 (3600)	91234-01-000 (4200)	91234-01-000 (3200)

40N

40N

40N

- 4

NOT USED WITH 1L6
- 3

FOR CONNECTOR INSTALLATION SEE DETAIL BH.
- 2

FOR CONNECTOR INSTALLATION SEE DETAIL BE.

1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

NOTES:

		728B	730C
GROUND	8-G	136145-02-023	136145-02-015
WIRE ASM 110V US		171925-01-000	166007-01-000
WIRE ASM 110V CA		171925-02-000	166007-02-000
GENEARATOR CABLE ASM	UL	X	X
	CA	X	X
THROW IN #1	UL	136135-09-040 53B	136135-09-040 53B
	CA	136136-09-040 53B	136136-09-040 53B
THROW IN #2	UL	X	X
	CA	X	X
THROW IN #3	UL	X	136135-06-004 41Q
	CA	X	136136-06-004 41Q
THROW IN #4	UL	X	136131-03-003 2
	CA	X	136134-03-003 2
SLIDEOUT WIRE #1		136151-03-020 3	136151-03-020 3

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

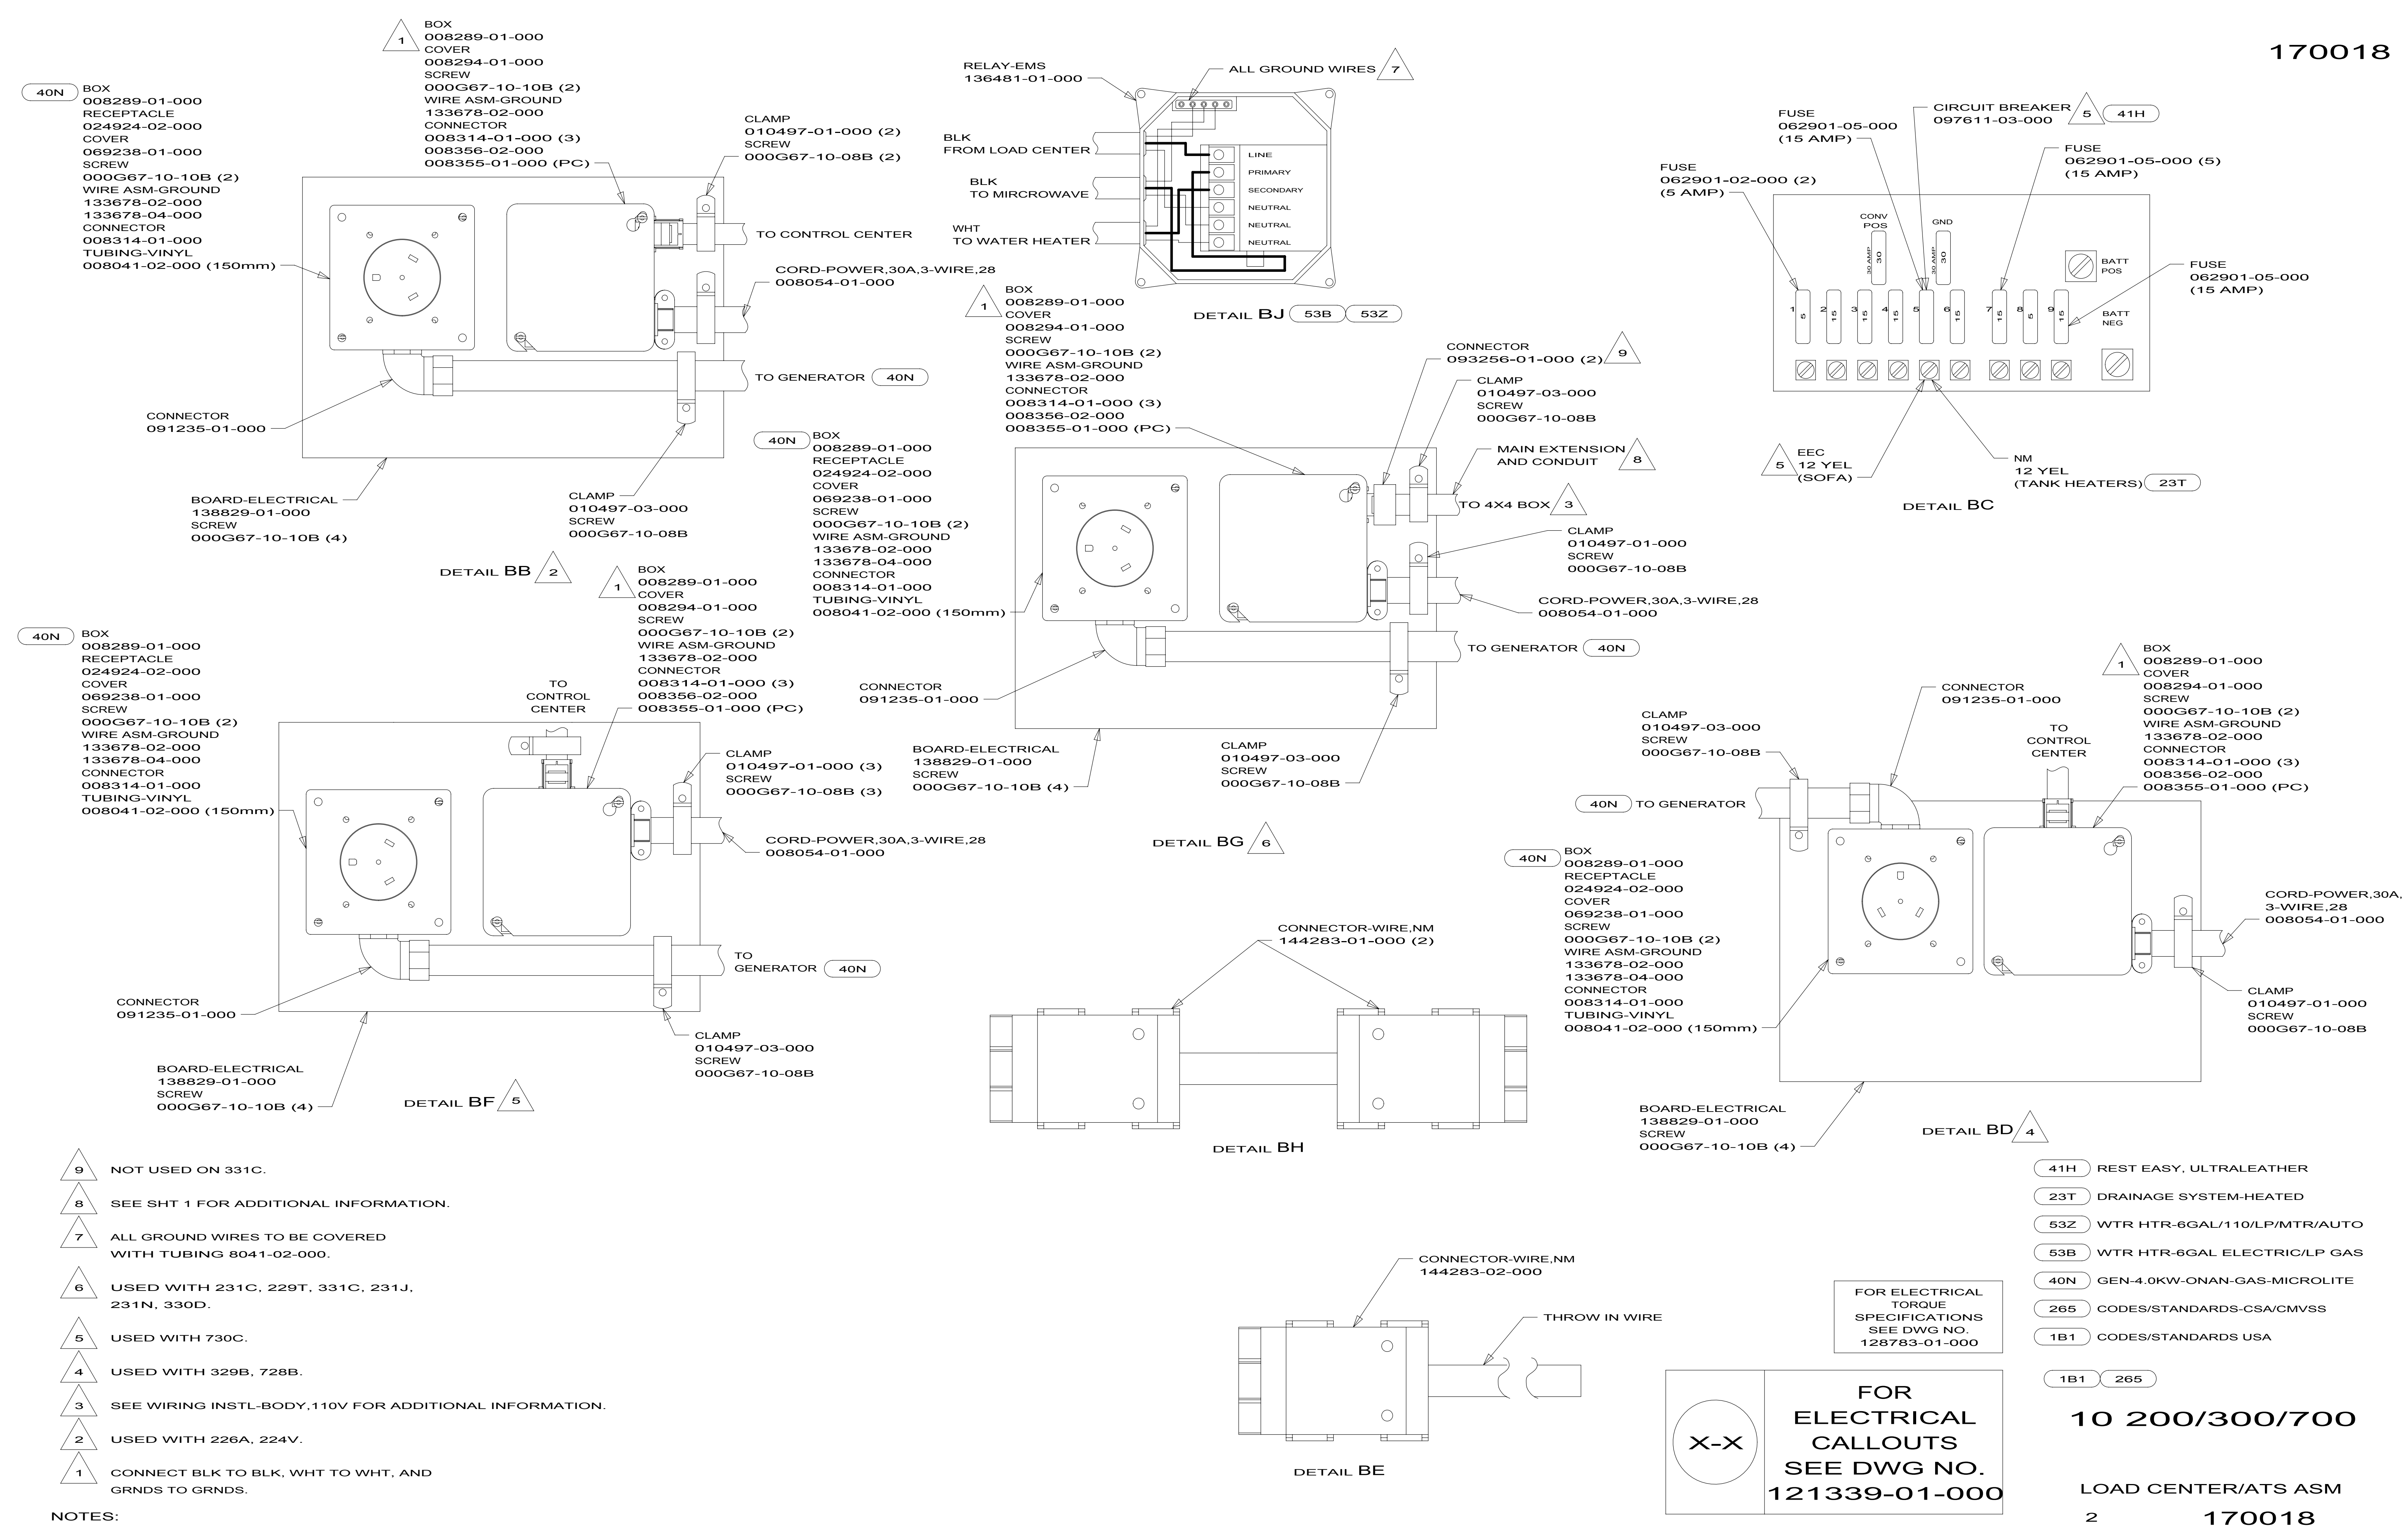
- 41Q SOFA/SLEEPER-ULTRALEATHER HP
- 1L6 TV-15"DC,COLOR,LCD W/REMOTE
- 1MB CUSTOM FLOORPLAN - OFFICE
- 40B INVERTER-DC/AC, 300 WATT
- 53Z WTR HTR-6GAL/110/LP/MTR/AUTO
- 53B WTR HTR-6GAL ELECTRIC/LP GAS
- 23T DRAINAGE SYSTEM-HEATED
- 40N GEN-4.0KW-ONANGAS-MICROQUIET
- 1L6 TV-15"DC,COLOR,LCD W/REMOTE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

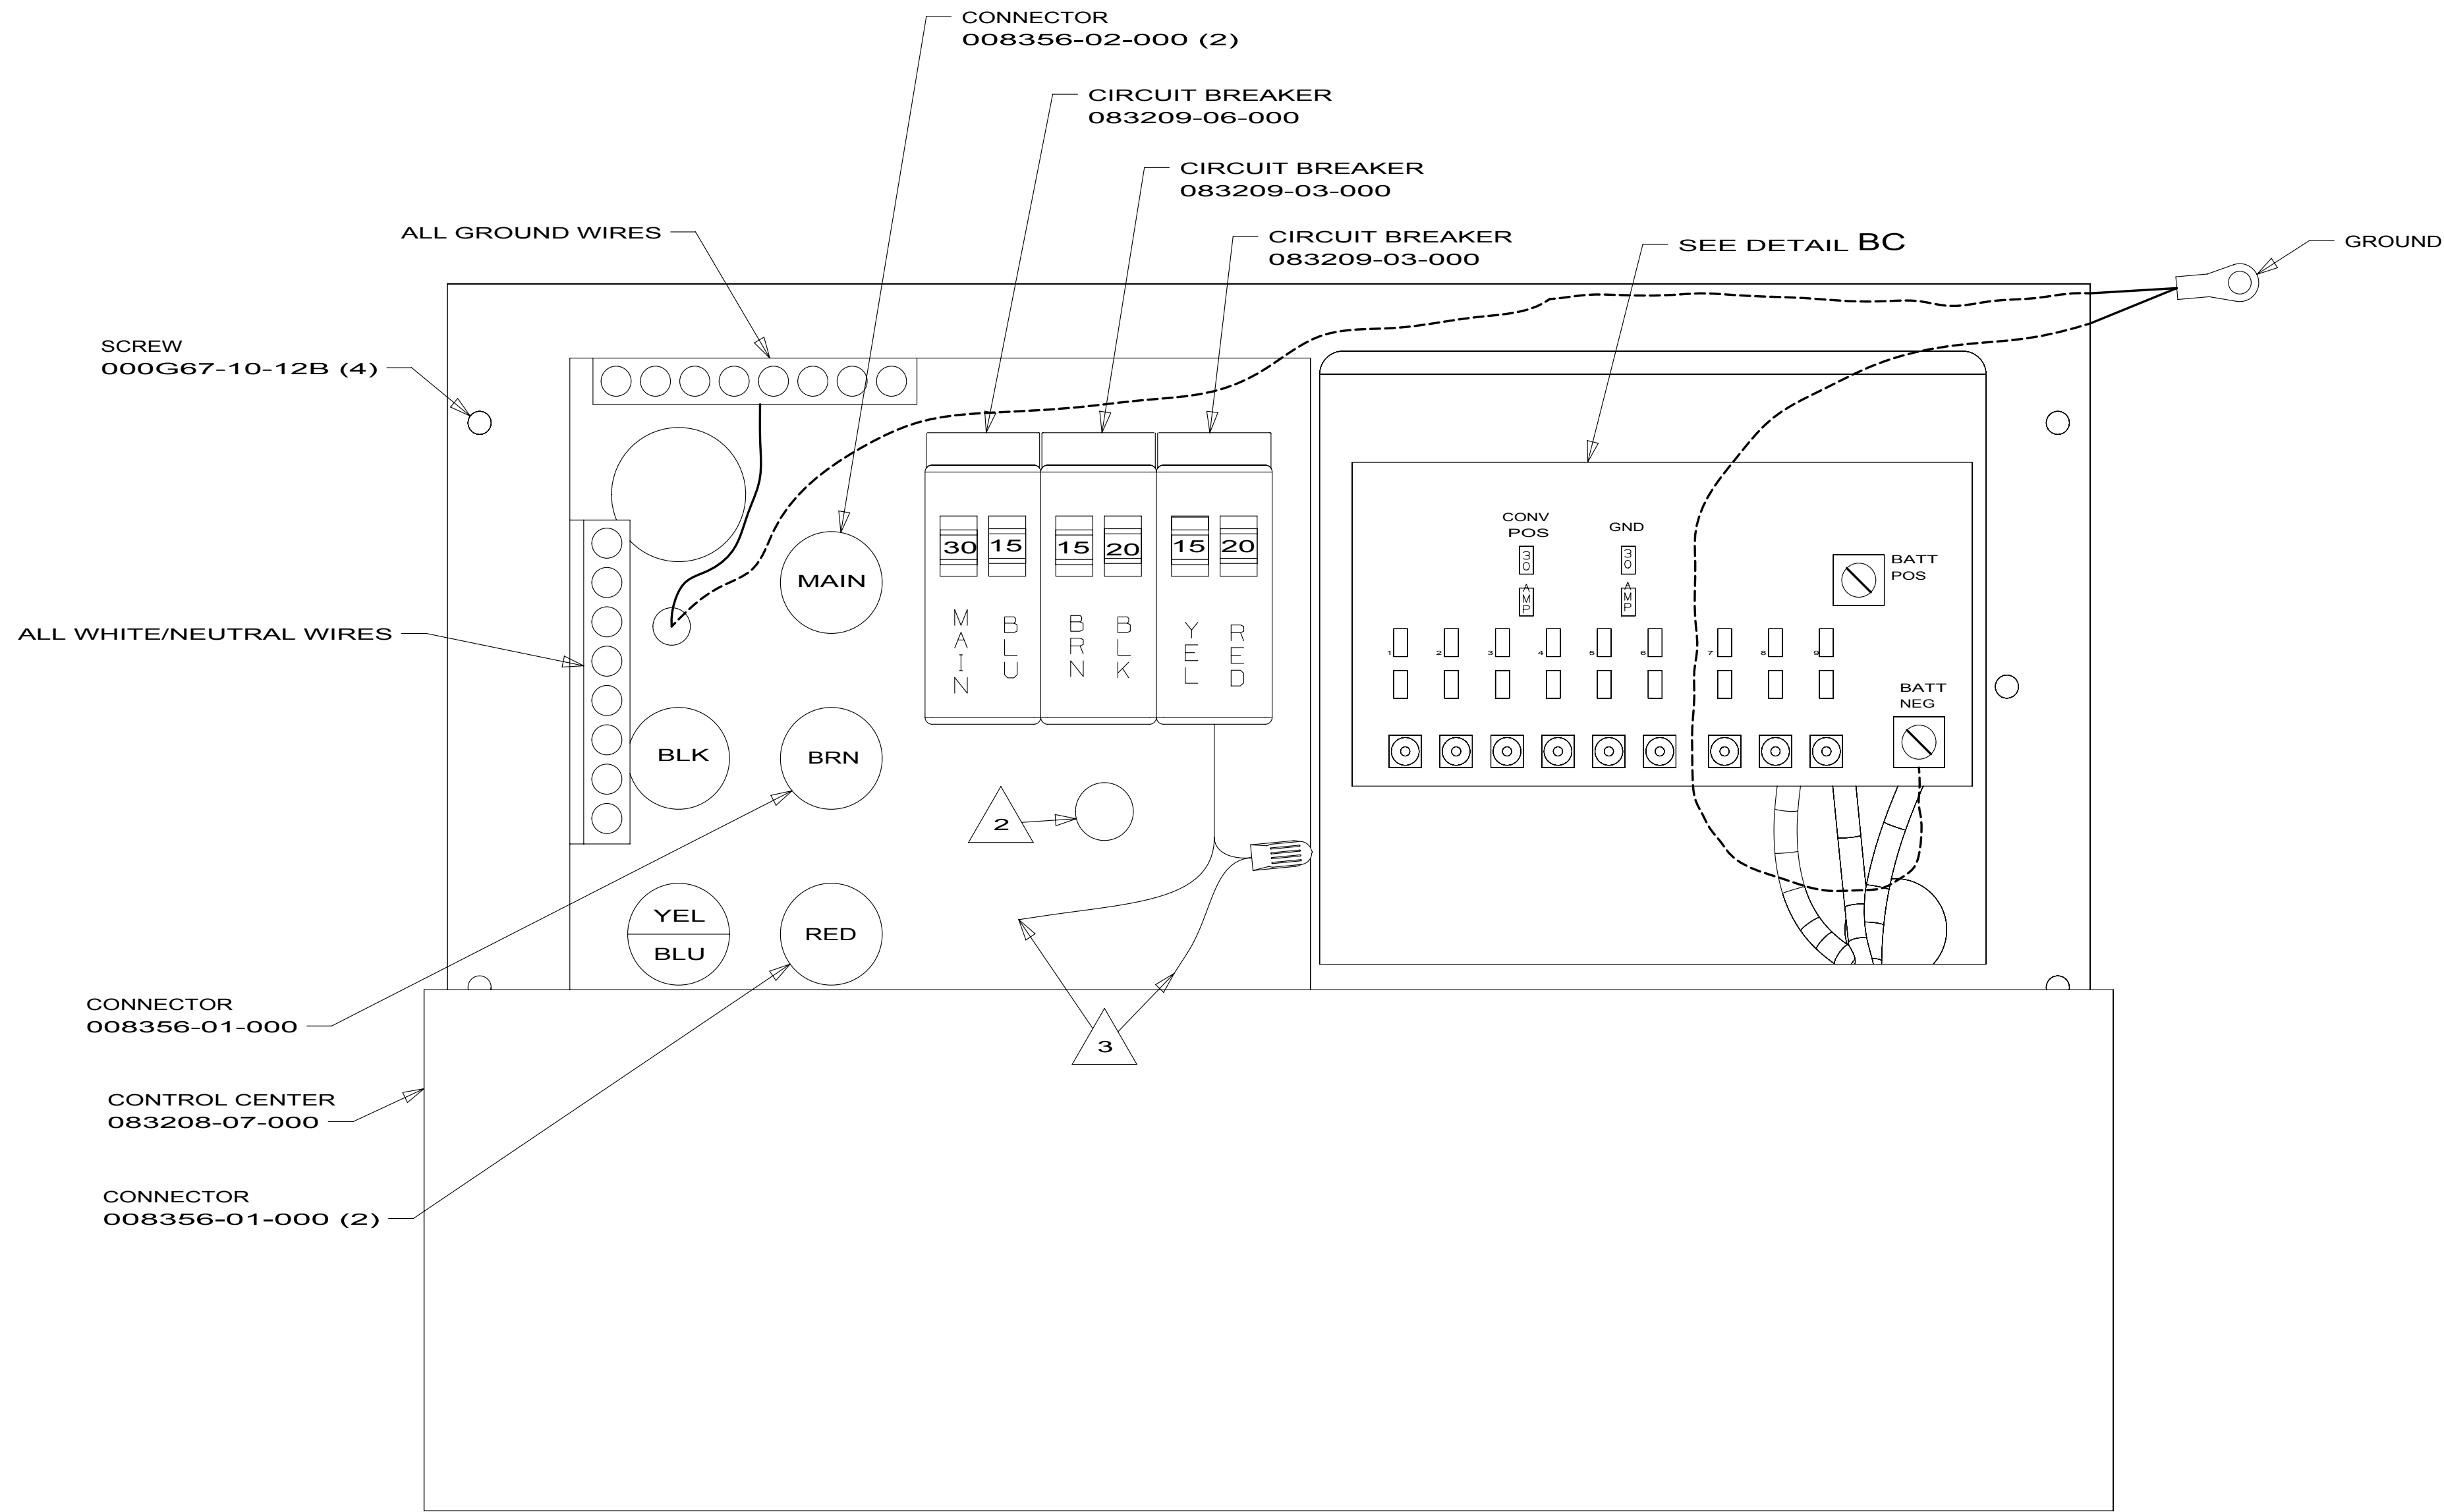
1B1 265

10 200/300/700

LOAD CENTER/ATS ASM

1 3 170018





3 CONNECT CONVERTER POWER INTO YELLOW BREAKER AND USE SUPPLIED WIRE NUT TO CONNECT YELLOW CIRCUIT.

2 SECURE WIRES TO BACKSIDE OF LOAD CENTER WITH WIRE TIE 116673-01-000.

1. ALL GROUND WIRES TO BE COVERED WITH TUBING 008041-02-000.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

10 200/300/700

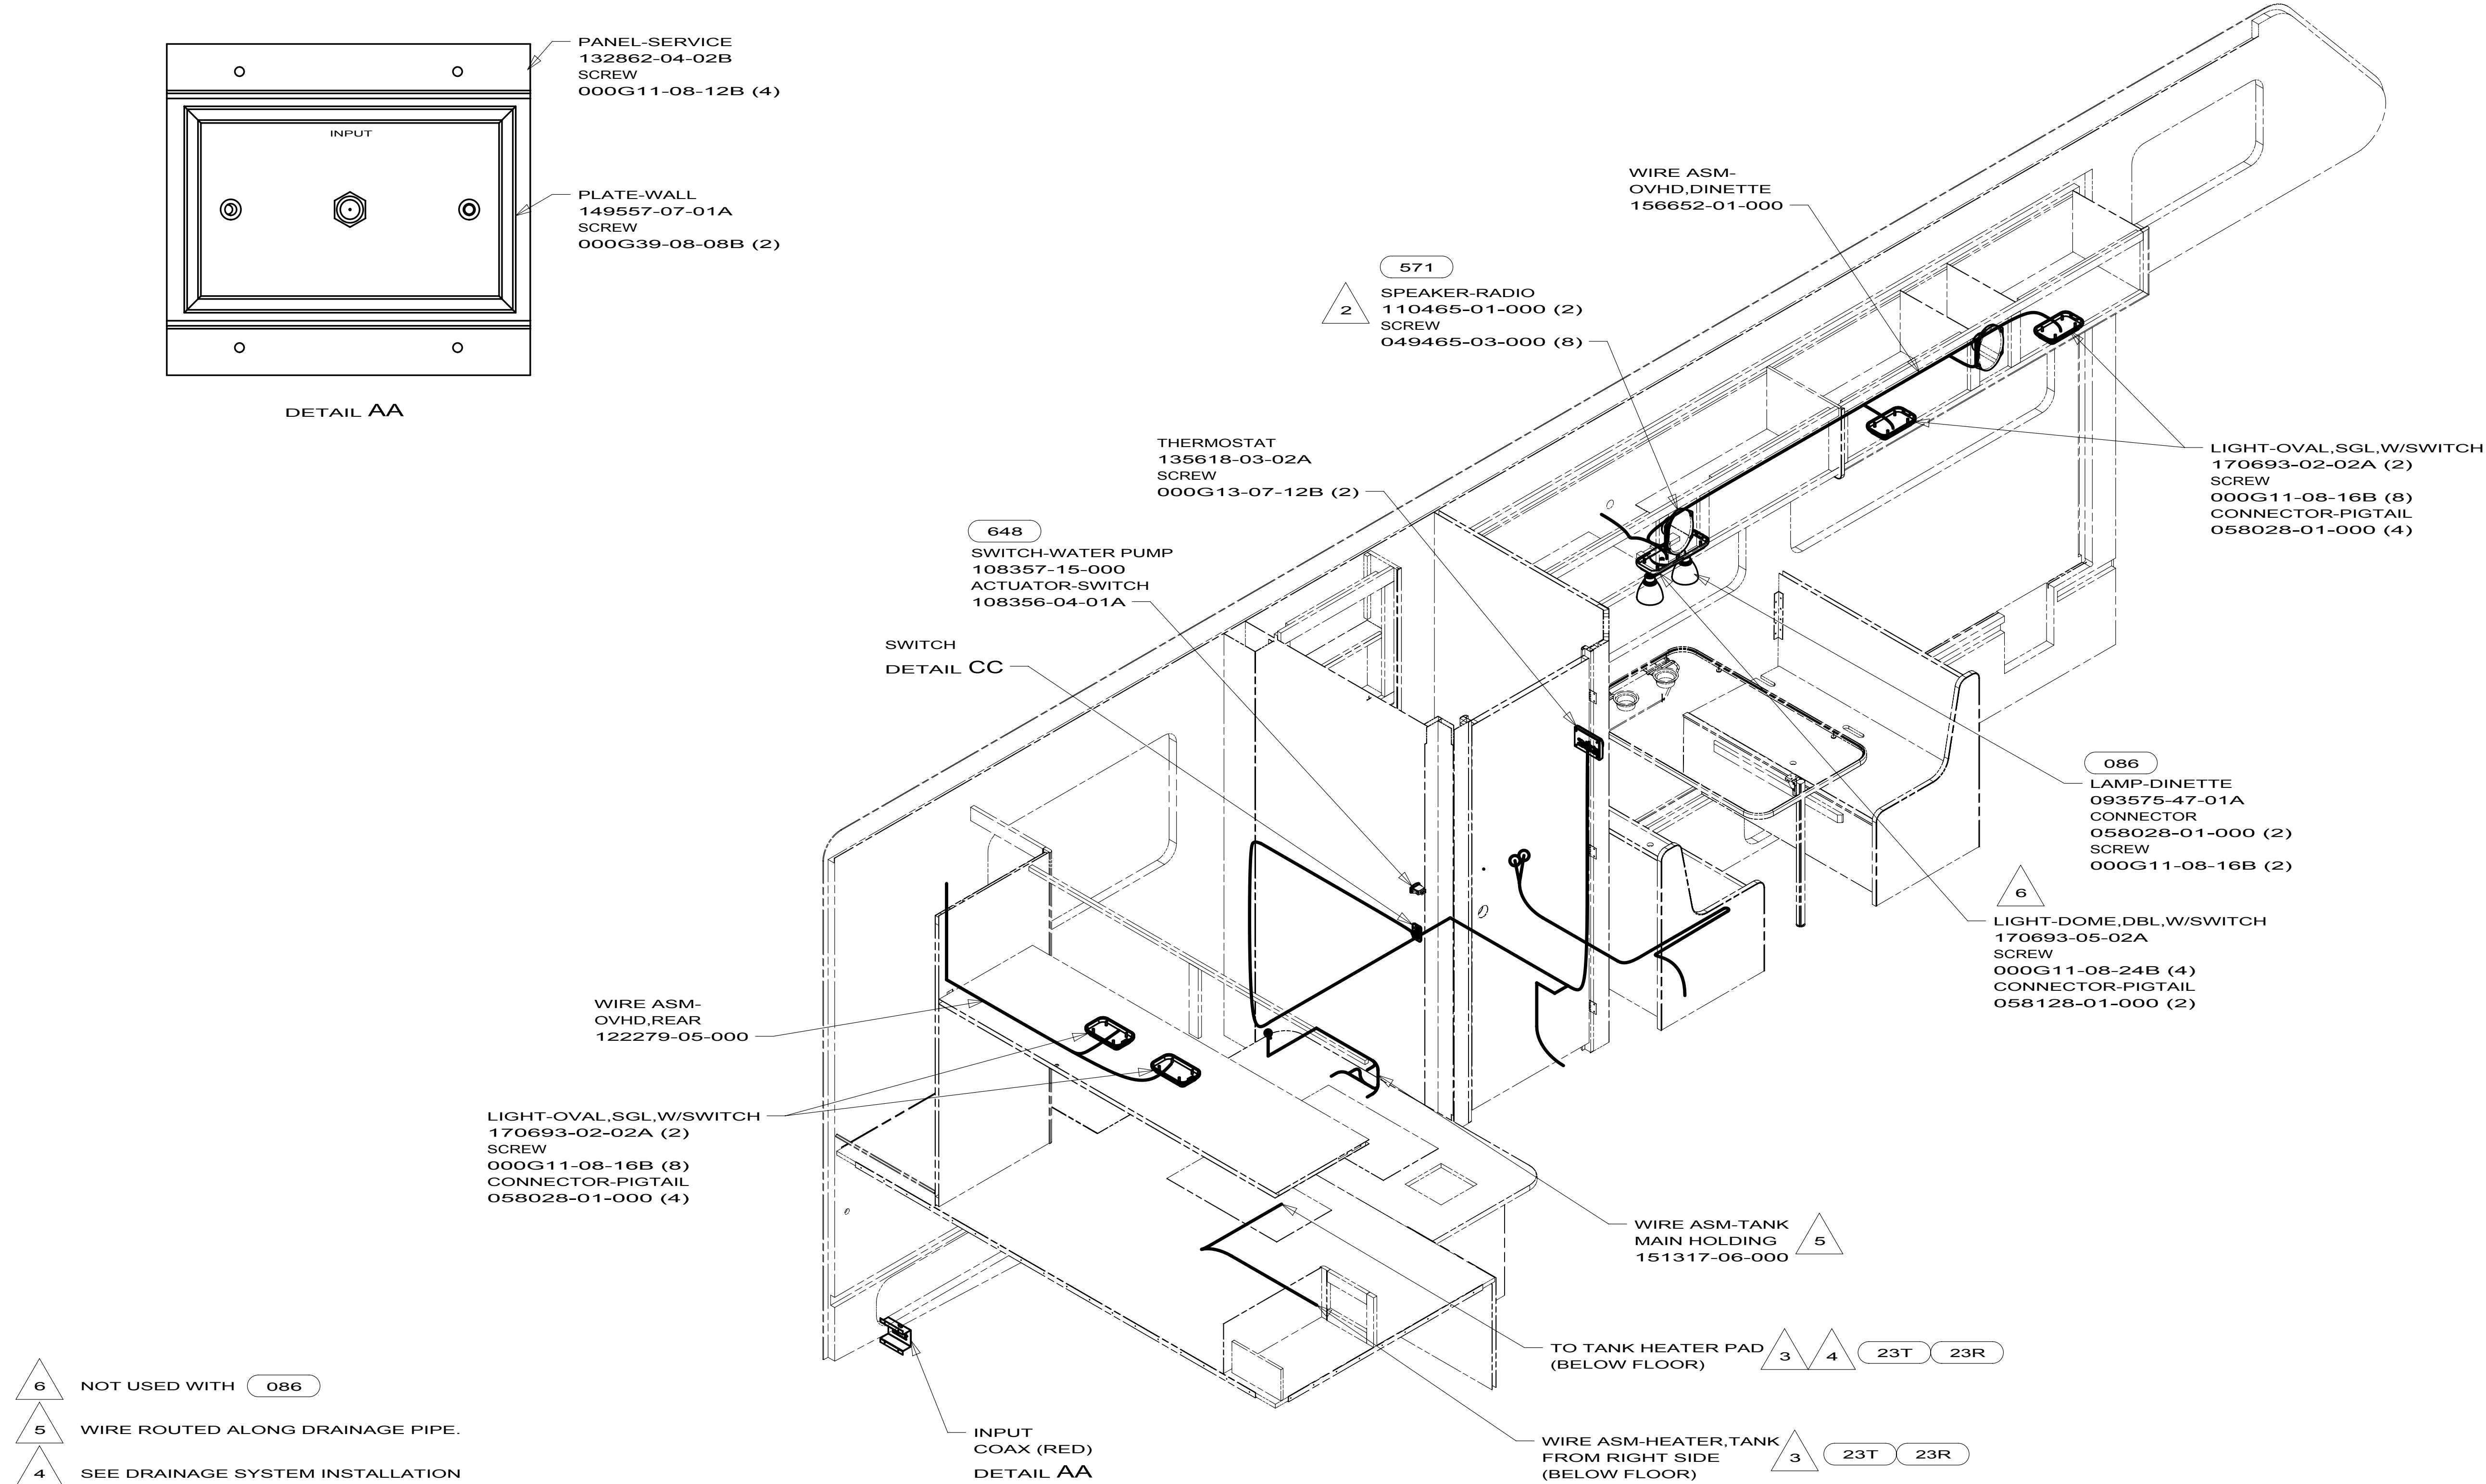
LOAD CENTER/ATS ASM

3

170018

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



- 6 NOT USED WITH 086
- 5 WIRE ROUTED ALONG DRAINAGE PIPE.
- 4 SEE DRAINAGE SYSTEM INSTALLATION FOR ADDITIONAL INFORMATION.
- 3 WIRE ROUTED ALONG DRAINAGE PIPE AND CONNECTED TO PIPE WITH TIE-WIRE 008343-04-000.
- 2 USE ONE OF THE 4 SPEAKER ASM'S PROVIDED IN KIT. SEND SCREW IN THE KIT TO THE SURPLUS STORE TO BE SOLD. SEND THE WIRE ASM W/HSG TO WIRE PREP TO BE INCORPORATED INTO THE NECESSARY WIRE LOOM.

1. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASS OVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 008343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIME WITH PRIMER 94.


NOTES:








- 648 RENTAL - FRASERWAY
- 086 INTERIOR UPGRADE PACKAGE
- 571 RADIO SPEAKERS
- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 23T DRAINAGE SYSTEM-HEATED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000	X-X	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
--	-----	---

WIRING INSTL-BODY,12V

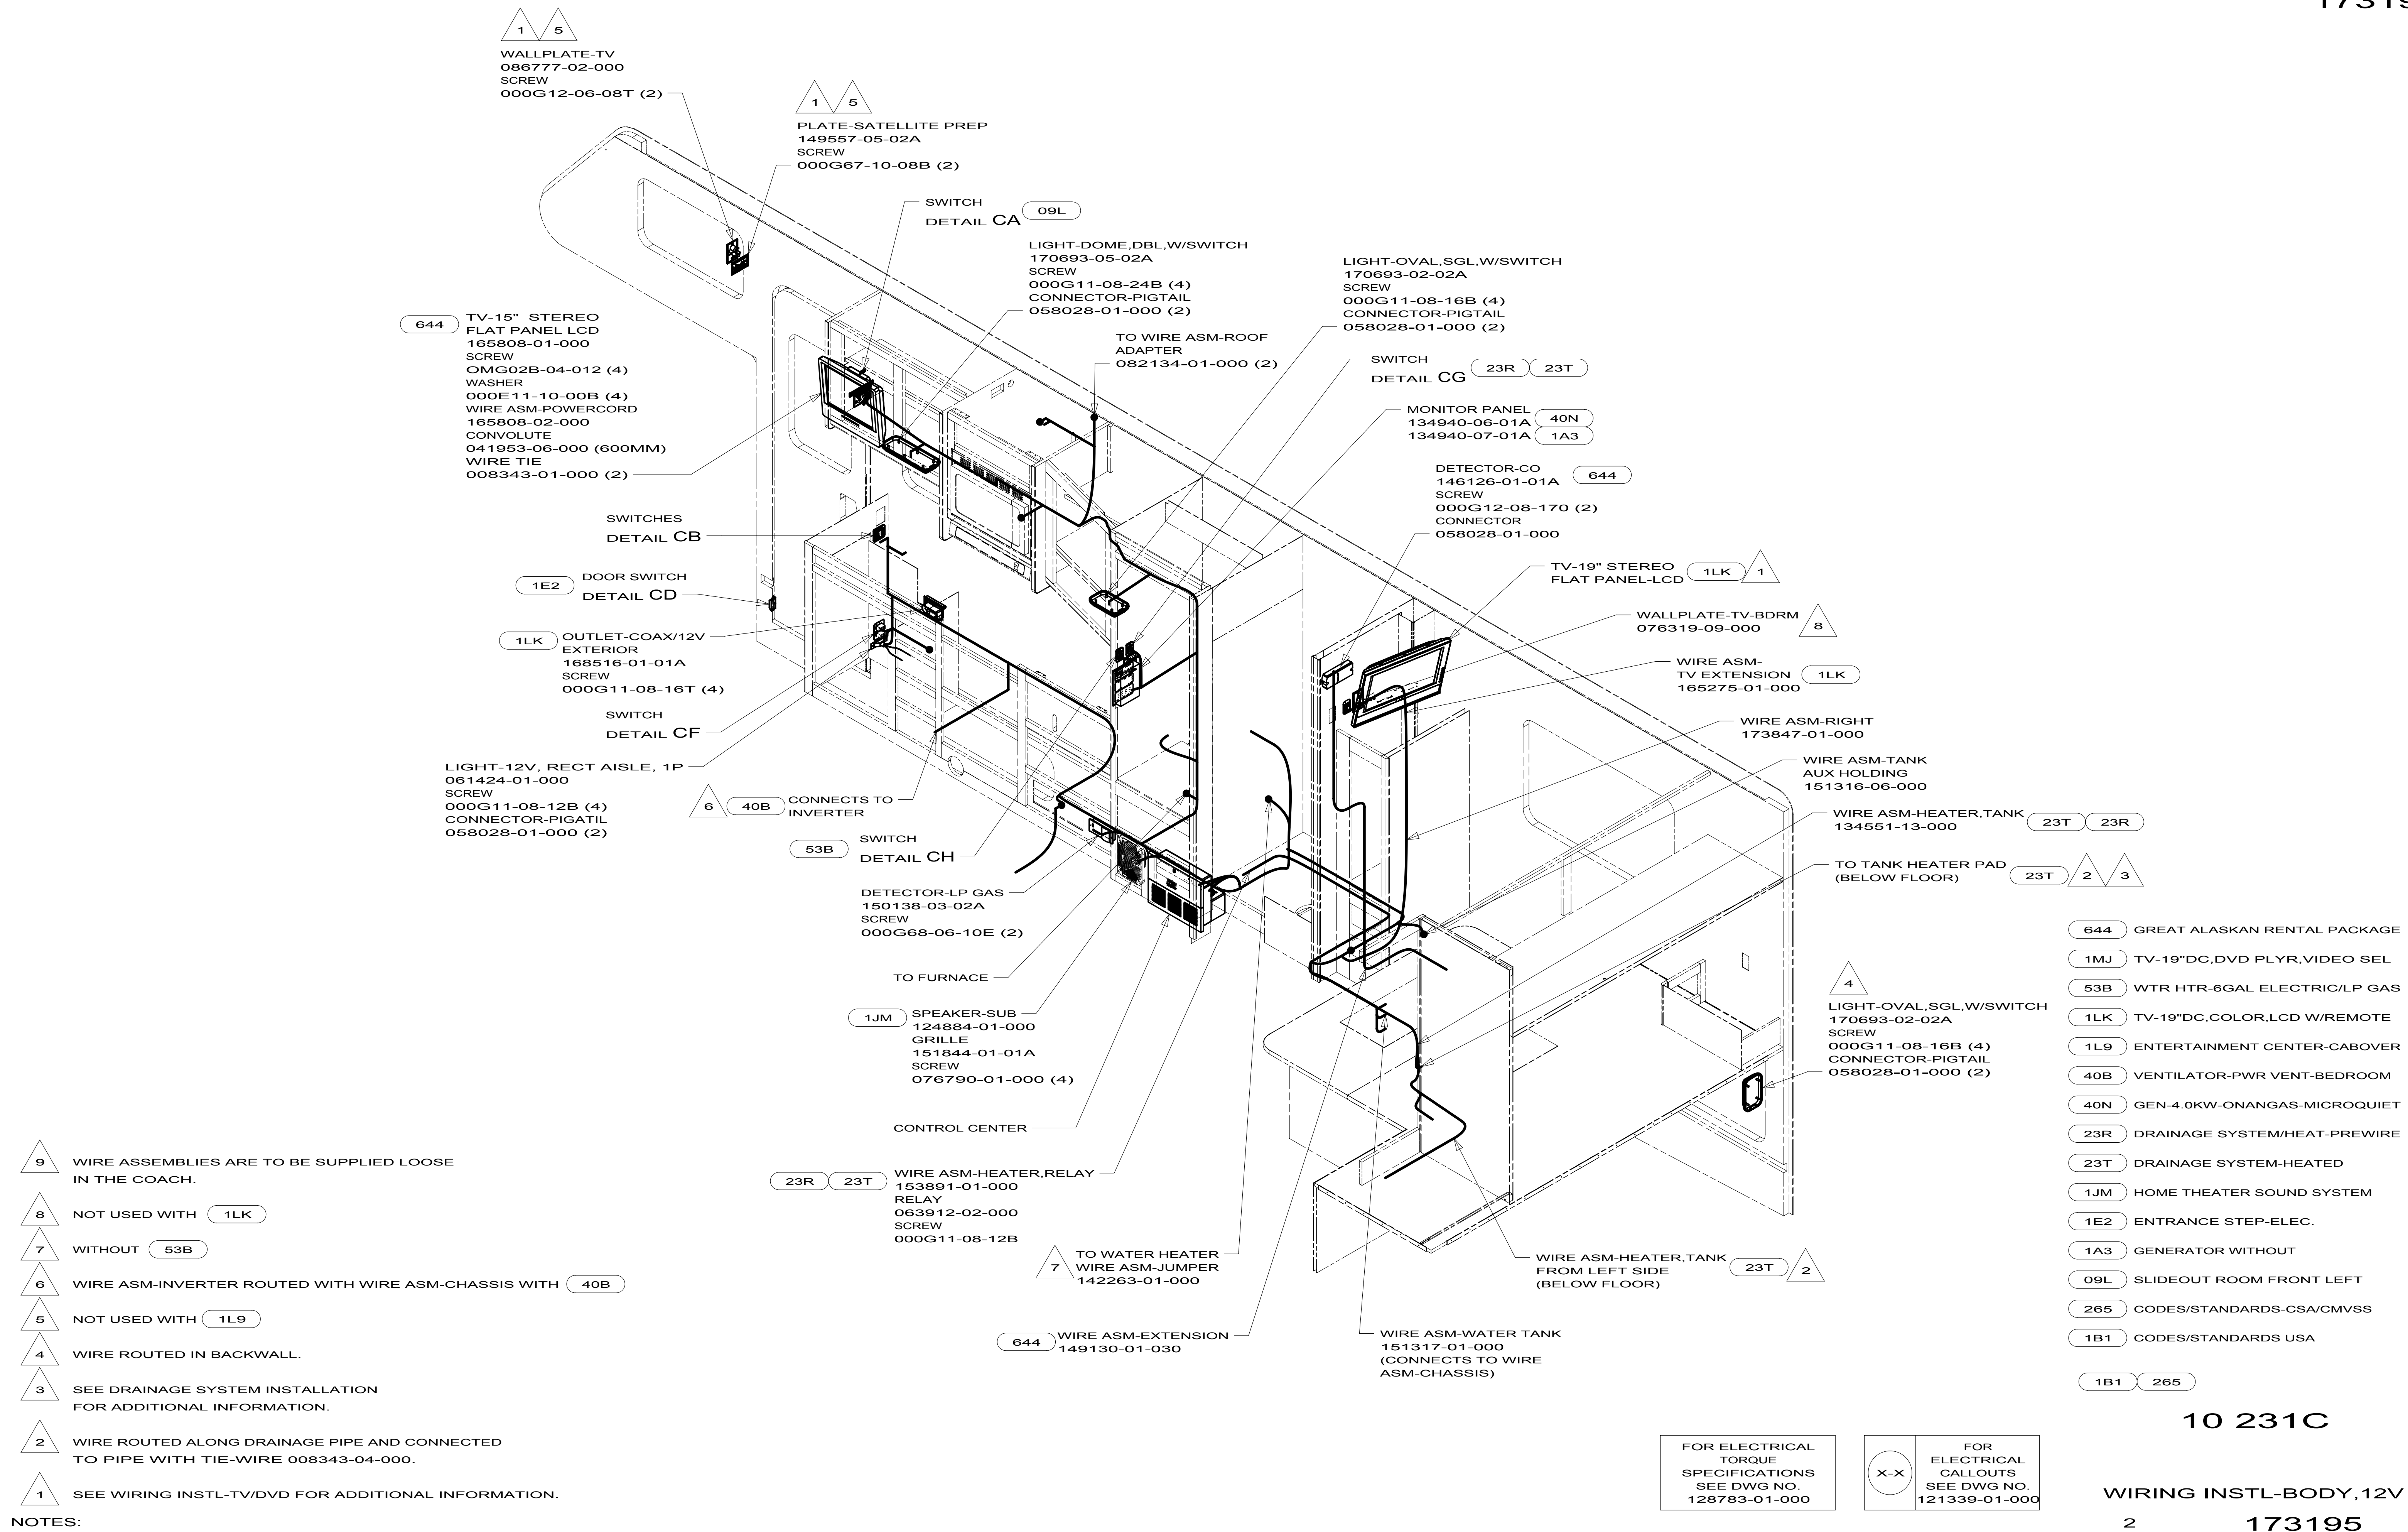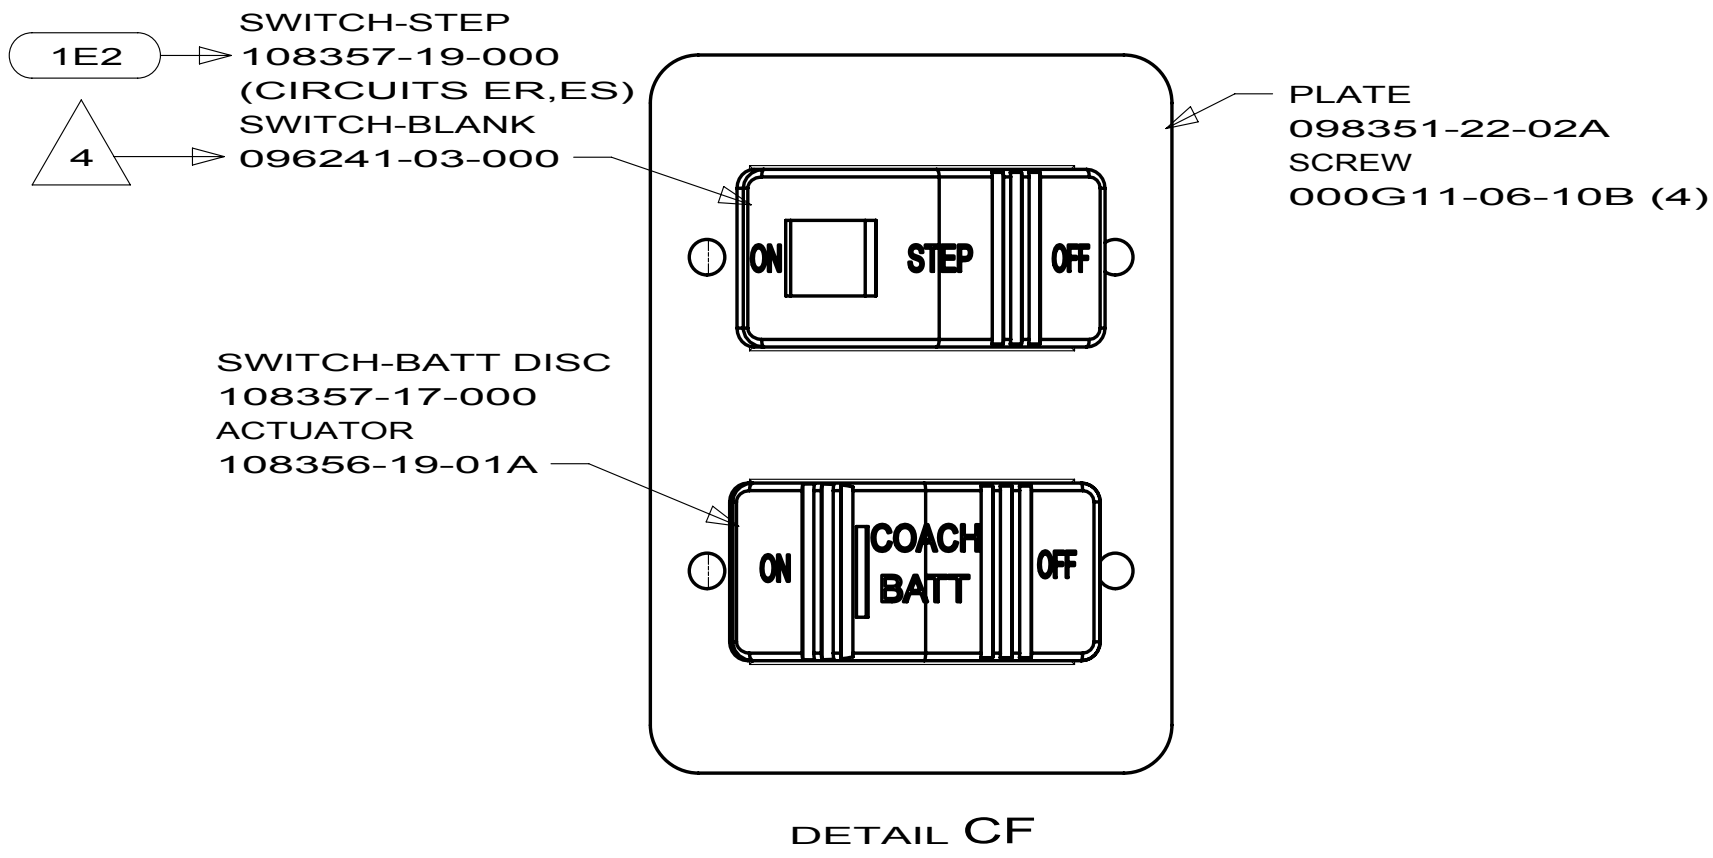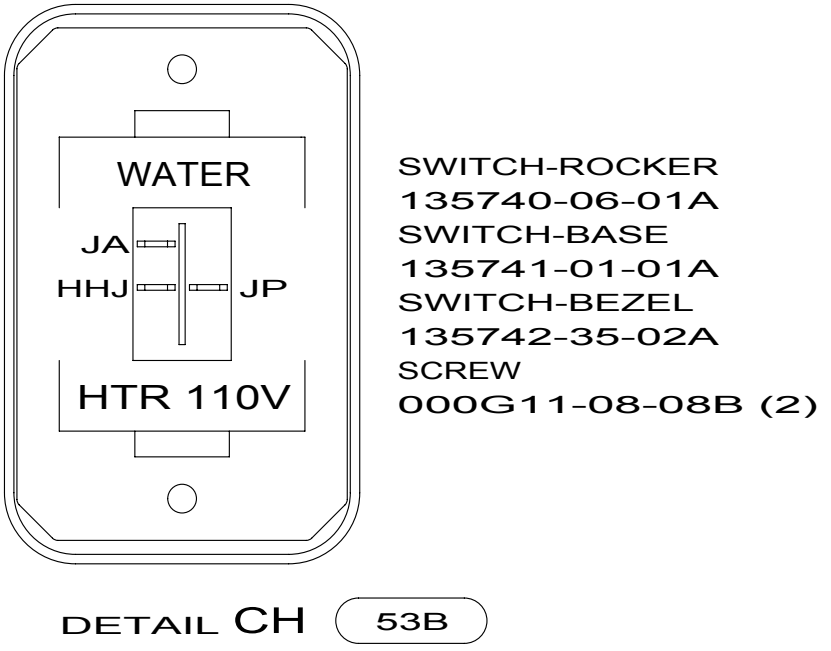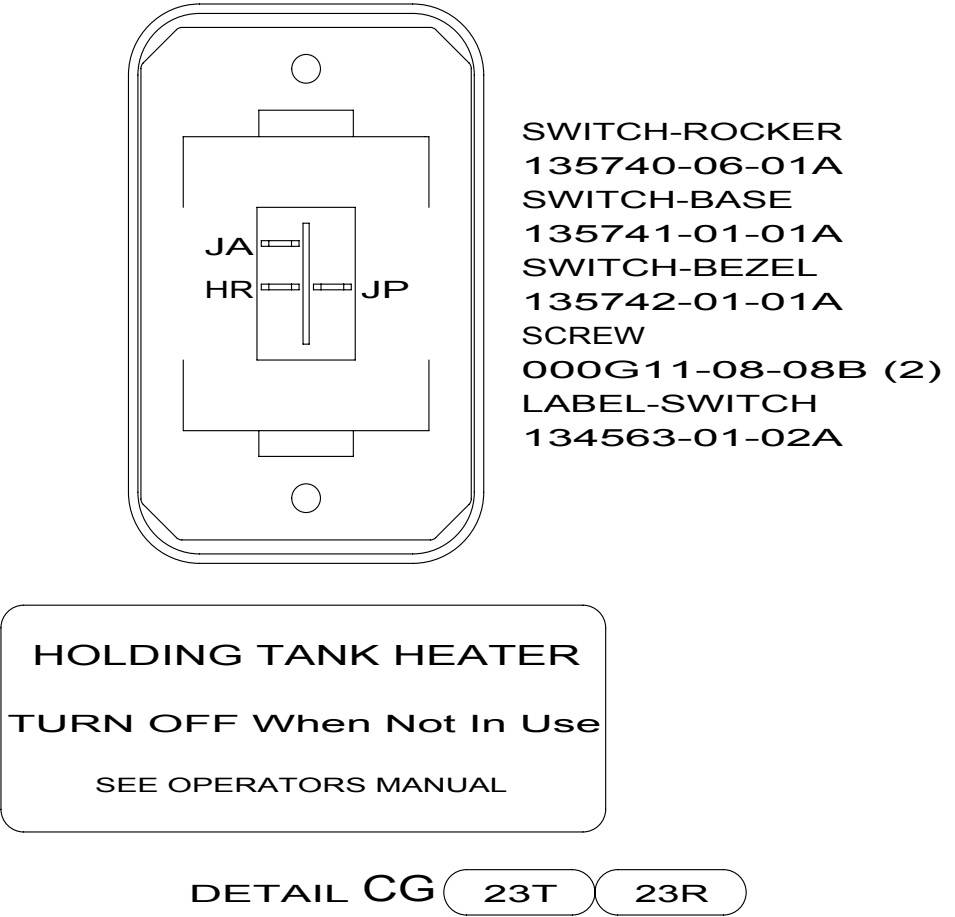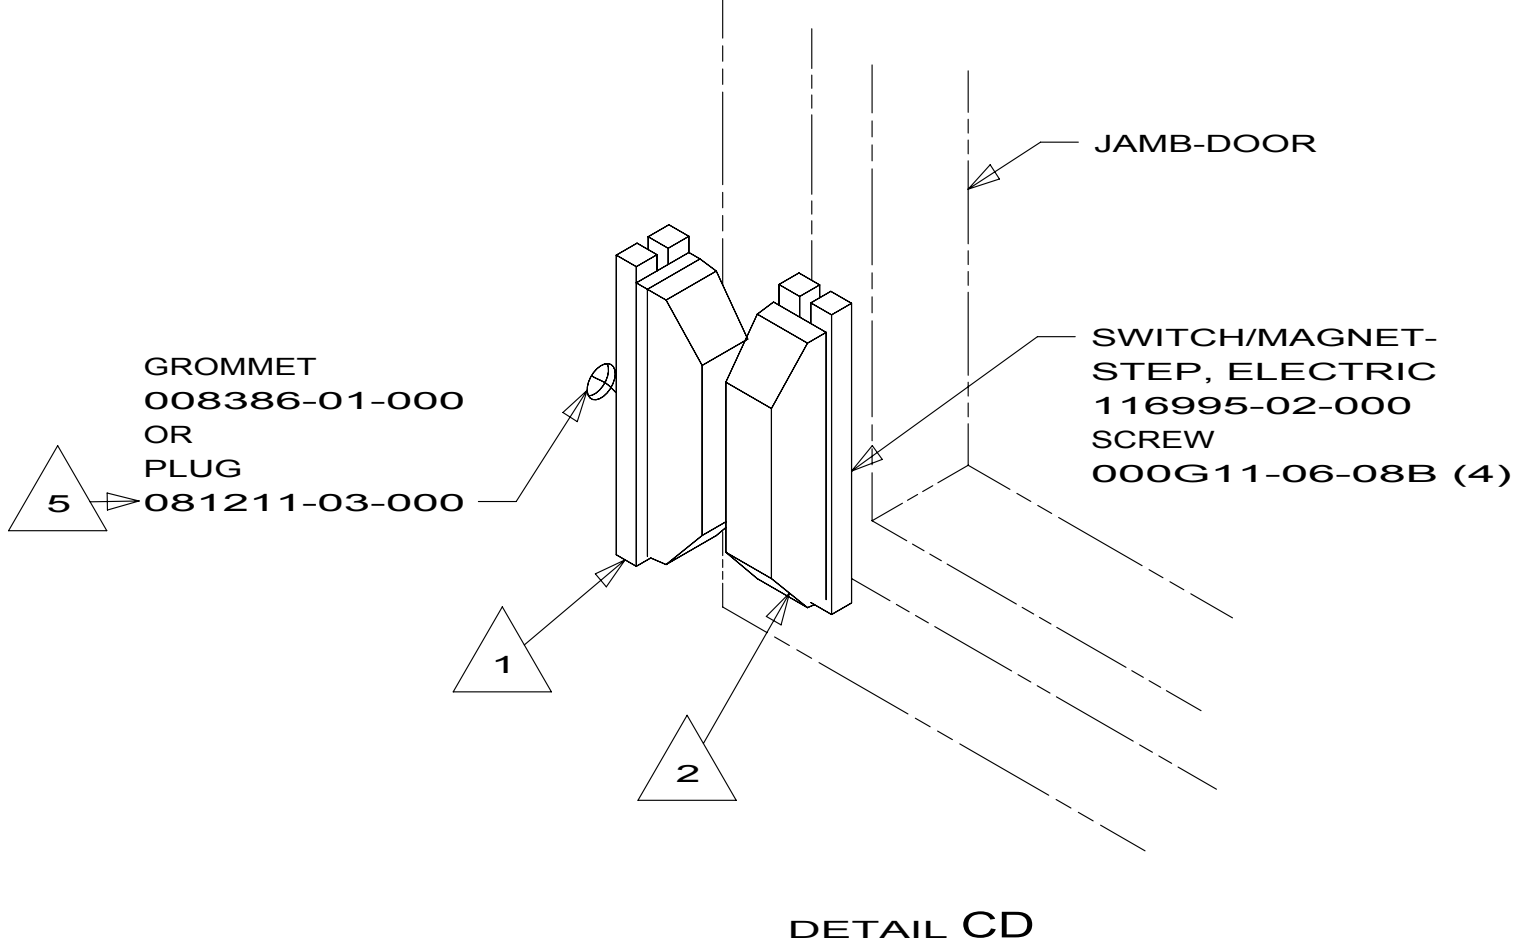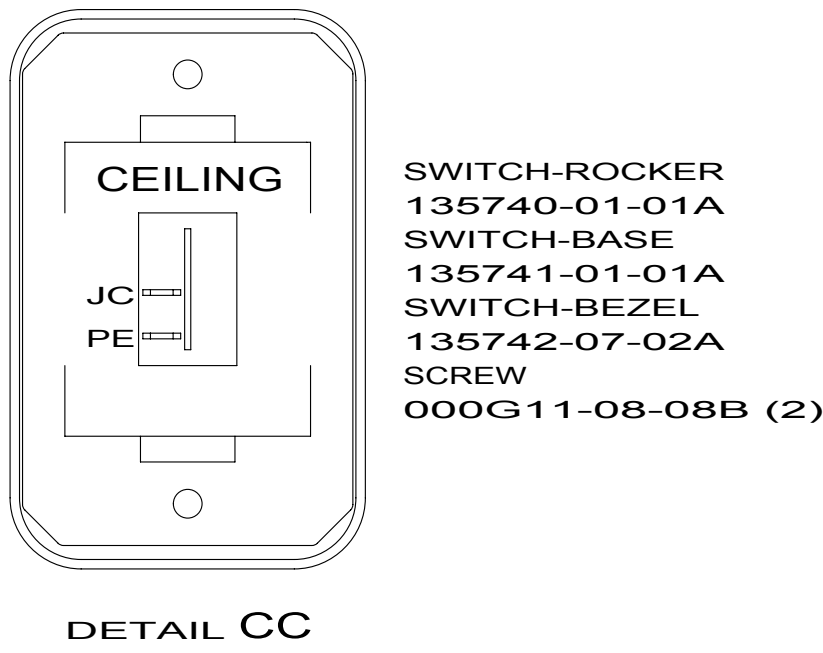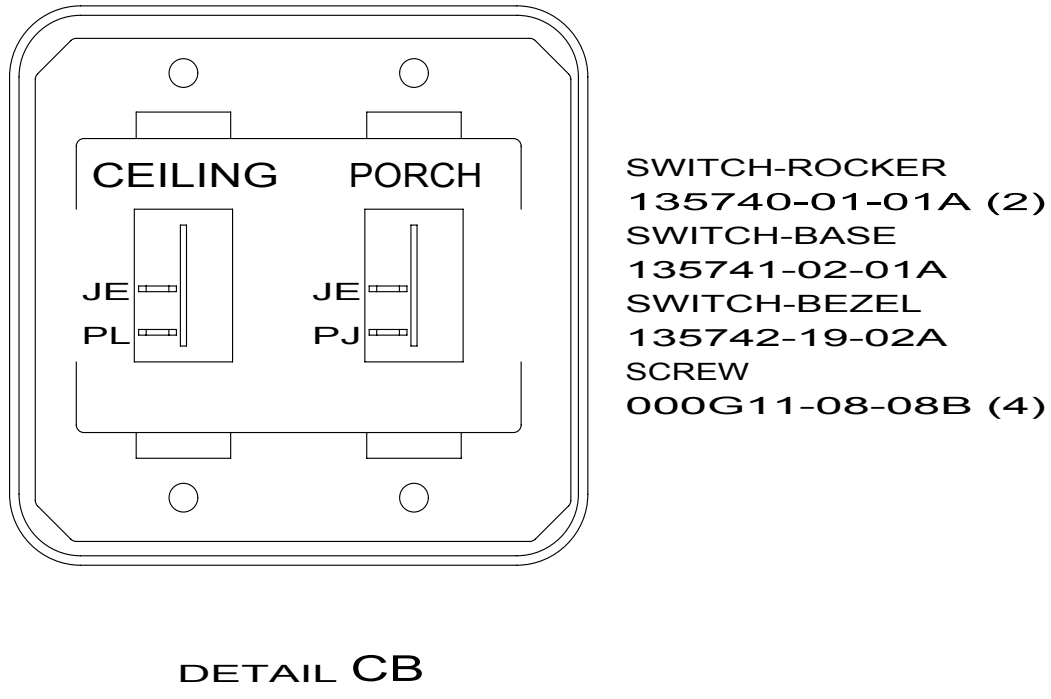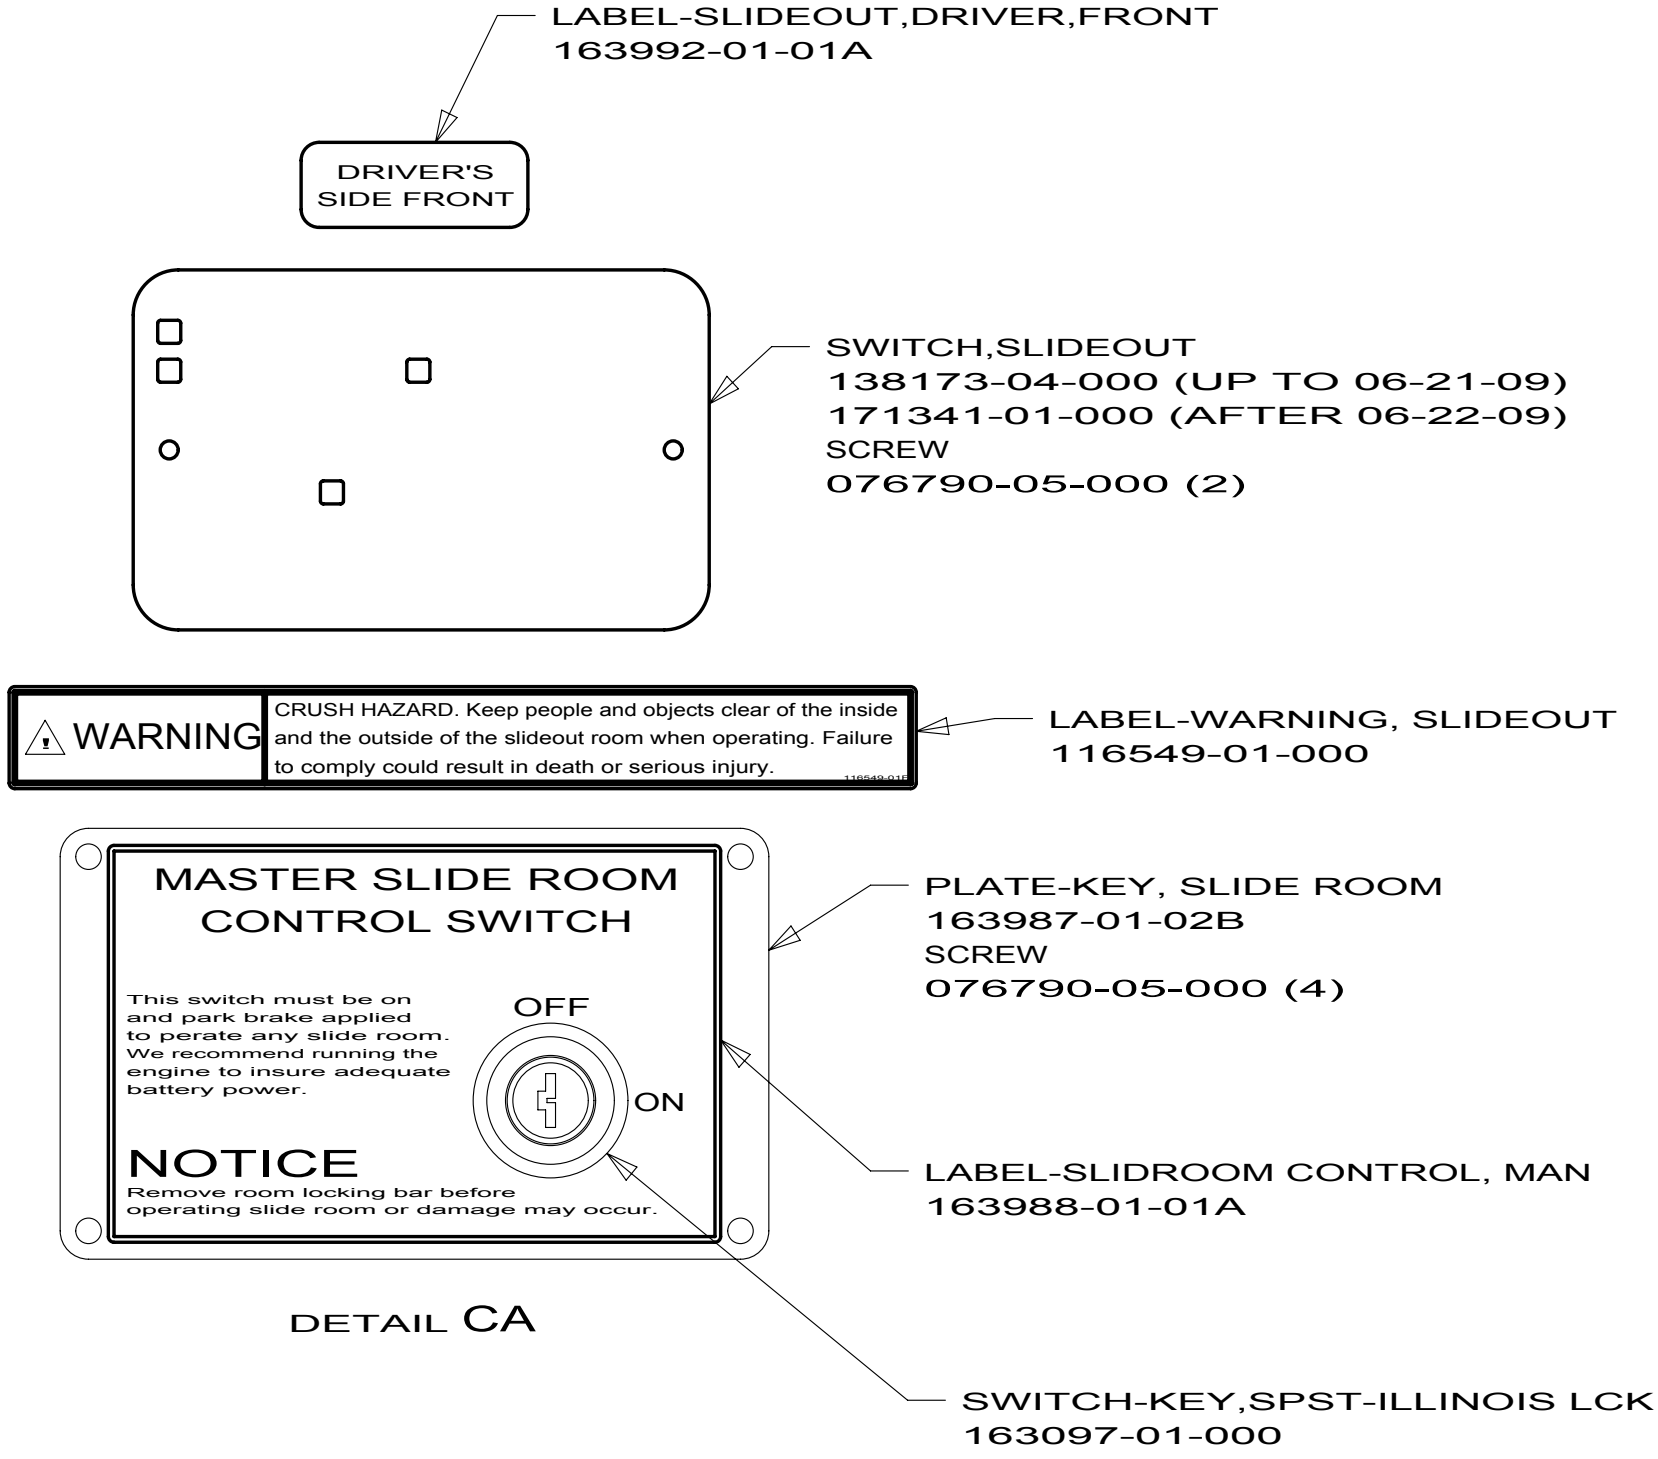1 4 173195





- 53B WTR HTR-6GAL ELECTRIC/LP GAS
- 1LY TV-15" CLR,LCD,REMOTE,REAR
- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 23T DRAINAGE SYSTEM-HEATED
- 1E2 ENTRANCE STEP-ELEC.
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

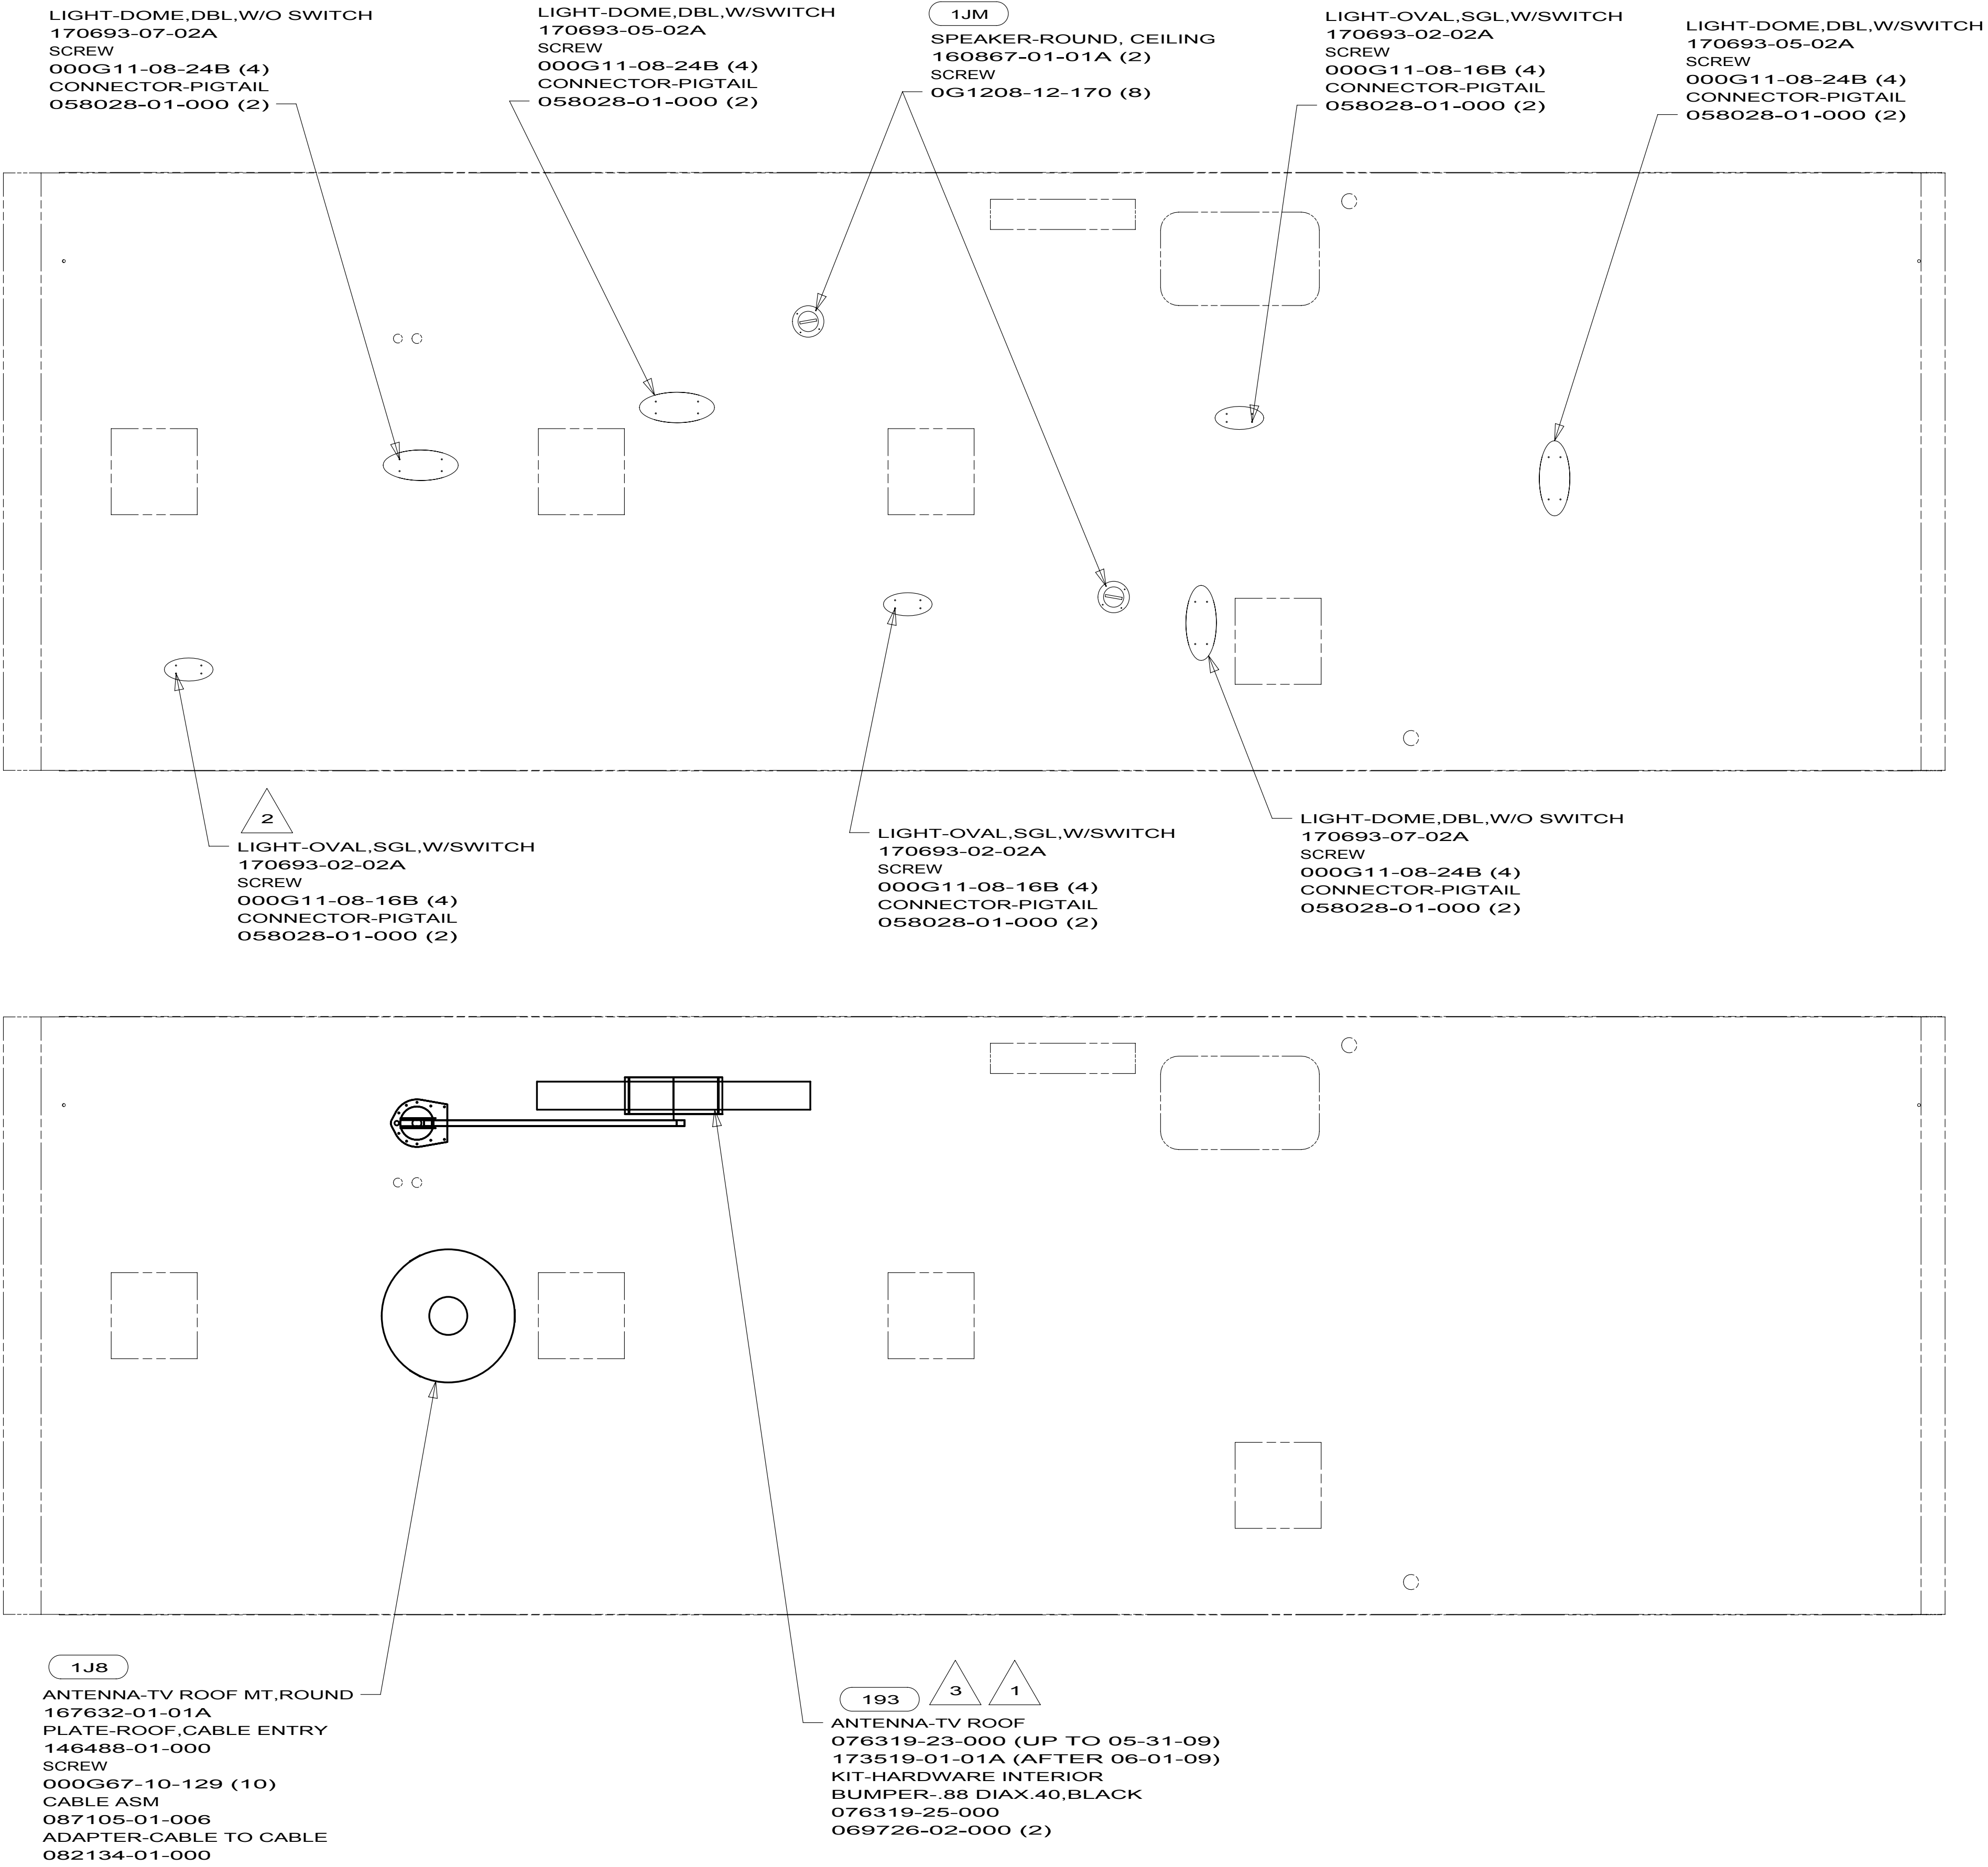
10 231C

WIRING INSTL-BODY, 12V

3 173195

- 5 WITHOUT 1E2, INSTALL PLUG IN HOLE OF STEP BOX.
- 4 NOT USED WITH 1E2
- 3 FOR REFERENCE ONLY. SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 2 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME MOUNT WITH MAGNET TOWARD SWITCH.
- 1 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB ADJUST HEIGHT TO MATCH MAGNET.

NOTES:



- 3** SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.
- 2** NOT USED WITH **1L1**
- 1** NOT USED WITH **1J8**

NOTES:

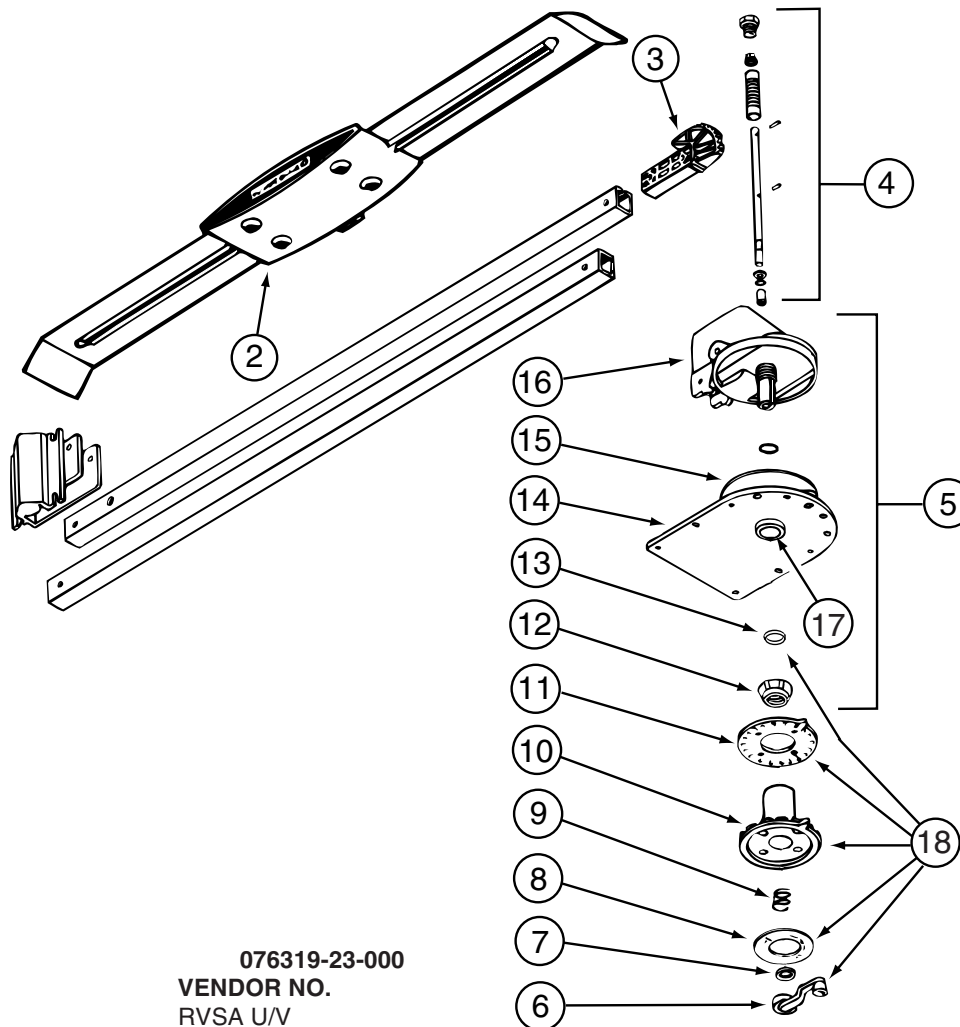
FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1JM** HOME THEATER SOUND SYSTEM
- 1L1** TV-27" W/VIDEO SELECTION SYS
- 193** TV ANTENNA-AMPLIFIED SYSTEM
- 1J8** TV ANTENNA-OMNIDIRECTIONAL
- 265** CODES/STANDARDS-CSA/CMVSS
- 1B1** CODES/STANDARDS USA

10 231C

WIRING INSTL-BODY,12V



KEY PART NUMBER

2	076319-01-700
3	076319-01-701
4	076319-01-702
5	076319-01-711
7	076319-01-705
8	076319-01-708
9	076319-01-707
11	076319-01-712
12	076319-01-715
14	076319-01-713
15	076319-01-703
16	076319-01-714
17	076319-01-704
18	076319-01-709
	076319-01-716


U/M DESCRIPTION

EA	HEAD-ANTENNA, AMPLIFIED
EA	GEAR-ELEVATING, PLASTIC
EA	SHAFT ASM-ELEVATING
EA	BASE & LIFT ASM
EA	GROMMET-NYLON, 7/8"ID
EA	DECAL-CRANK
EA	SPRING-HANDLE
EA	PLATE - CEILING
EA	NUT (GEAR HOUSING)
EA	PLATE-BASE, STEEL
EA	BEARING-NYLON, 5"OD
EA	HOUSING, ROTATING GEAR
EA	BEARING-NYLON, 1.25"OD
EA	HANDLE-HEAD DIRECTIONAL
EA	TUBING, ELEVATING

076319-23-000
VENDOR NO.

RVSA U/V
2200046
RP-4000
2762802
3200658
5413002
2160822
3200608
2200047
3100523
3200656
2200049
3200657
200644
RP-2900

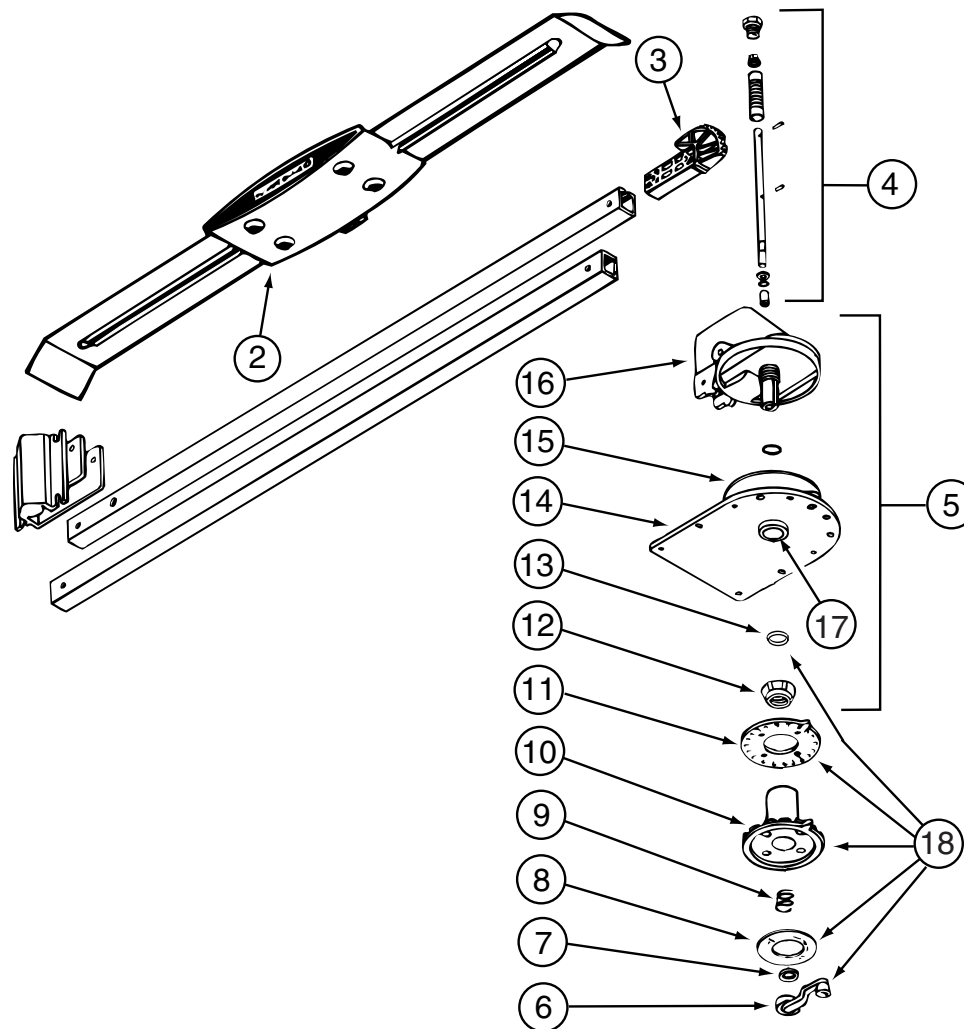CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)



076319-25-000

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
6	076319-01-706	EA	CRANK-W/SET SCREW UNIV/BEIGE	2750897
6	120233-01-710	EA	HANDLE-CRANK W/SCREW - WHITE	RP-6795
8	076319-01-708	EA	DECAL-CRANK	5413002
10	076319-25-700	EA	DIRECTIONAL HANDLE(WHITE)	3200612
11	076319-25-701	EA	PLATE - CEILING(WHITE)	3200609
13	120233-01-709	EA	WASHER-NYLON	RP-2658
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

KEY	PART NUMBER	U/M DESCRIPTION
	093575-46-700	EA GLOBE
	093575-46-701	EA NUT-PLAS. LOCKING


093575-46-01A
VENDOR NO.
 98
 39155

KEY	PART NUMBER	U/M DESCRIPTION
	093575-47-700	EA GLOBE - GLASS

093575-47-01A
VENDOR NO.
 114-GLASS

KEY	PART NUMBER	U/M DESCRIPTION
	093575-52-700	EA SHADE-FABRIC

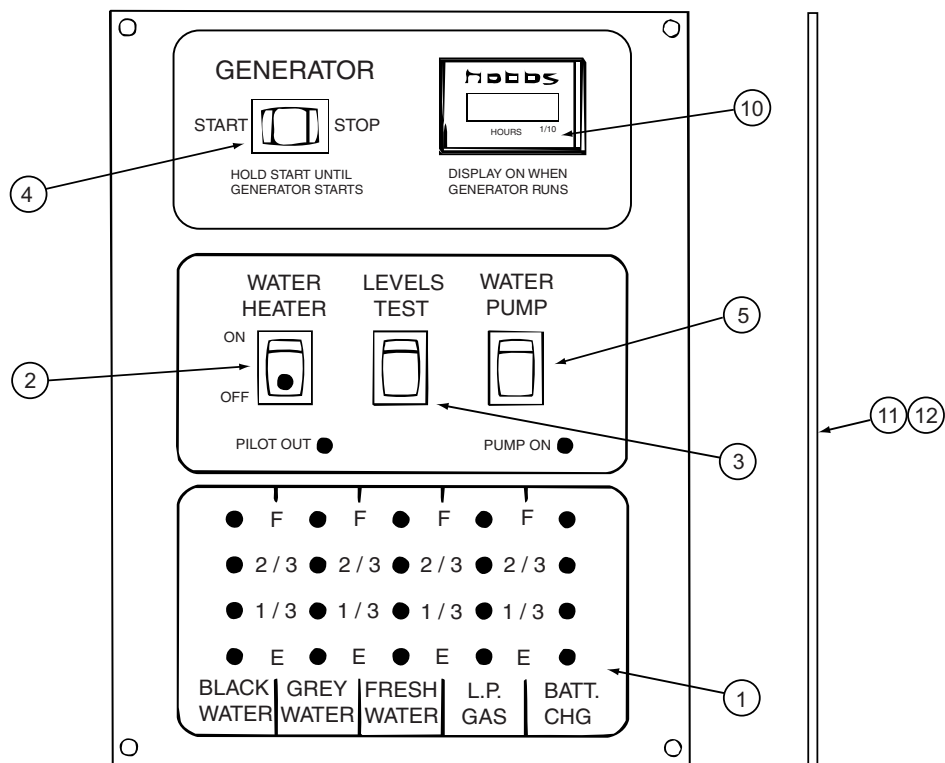093575-52-01A
VENDOR NO.
 H3015



134940-06-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-702	EA	SWITCH - MOM/OFF/MOM/3 TERM	L0112-00
5	096983-01-703	EA	SWITCH - ON/ON	L0115-00
10	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)	L0775-00
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

134940-07-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-703	EA	SWITCH - ON/ON	L0115-00
5	134940-02-700	EA	SWITCH - DUMMY	L0118
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				


KEY	PART NUMBER	U/M	DESCRIPTION	163097-01-000	VENDOR NO.
	163097-01-700	EA	KEY - #2382 (ILLINOIS LOCK)		2382
	163097-01-701	EA	KEY - #2341 (MILLER DIAL)		PART SALES

KEY	PART NUMBER	U/M	DESCRIPTION
	170693-02-700	EA	LENS-OPTIC

170693-02-02A
VENDOR NO
L8106

KEY	PART NUMBER	U/M	DESCRIPTION
	170693-05-700	EA	LENS

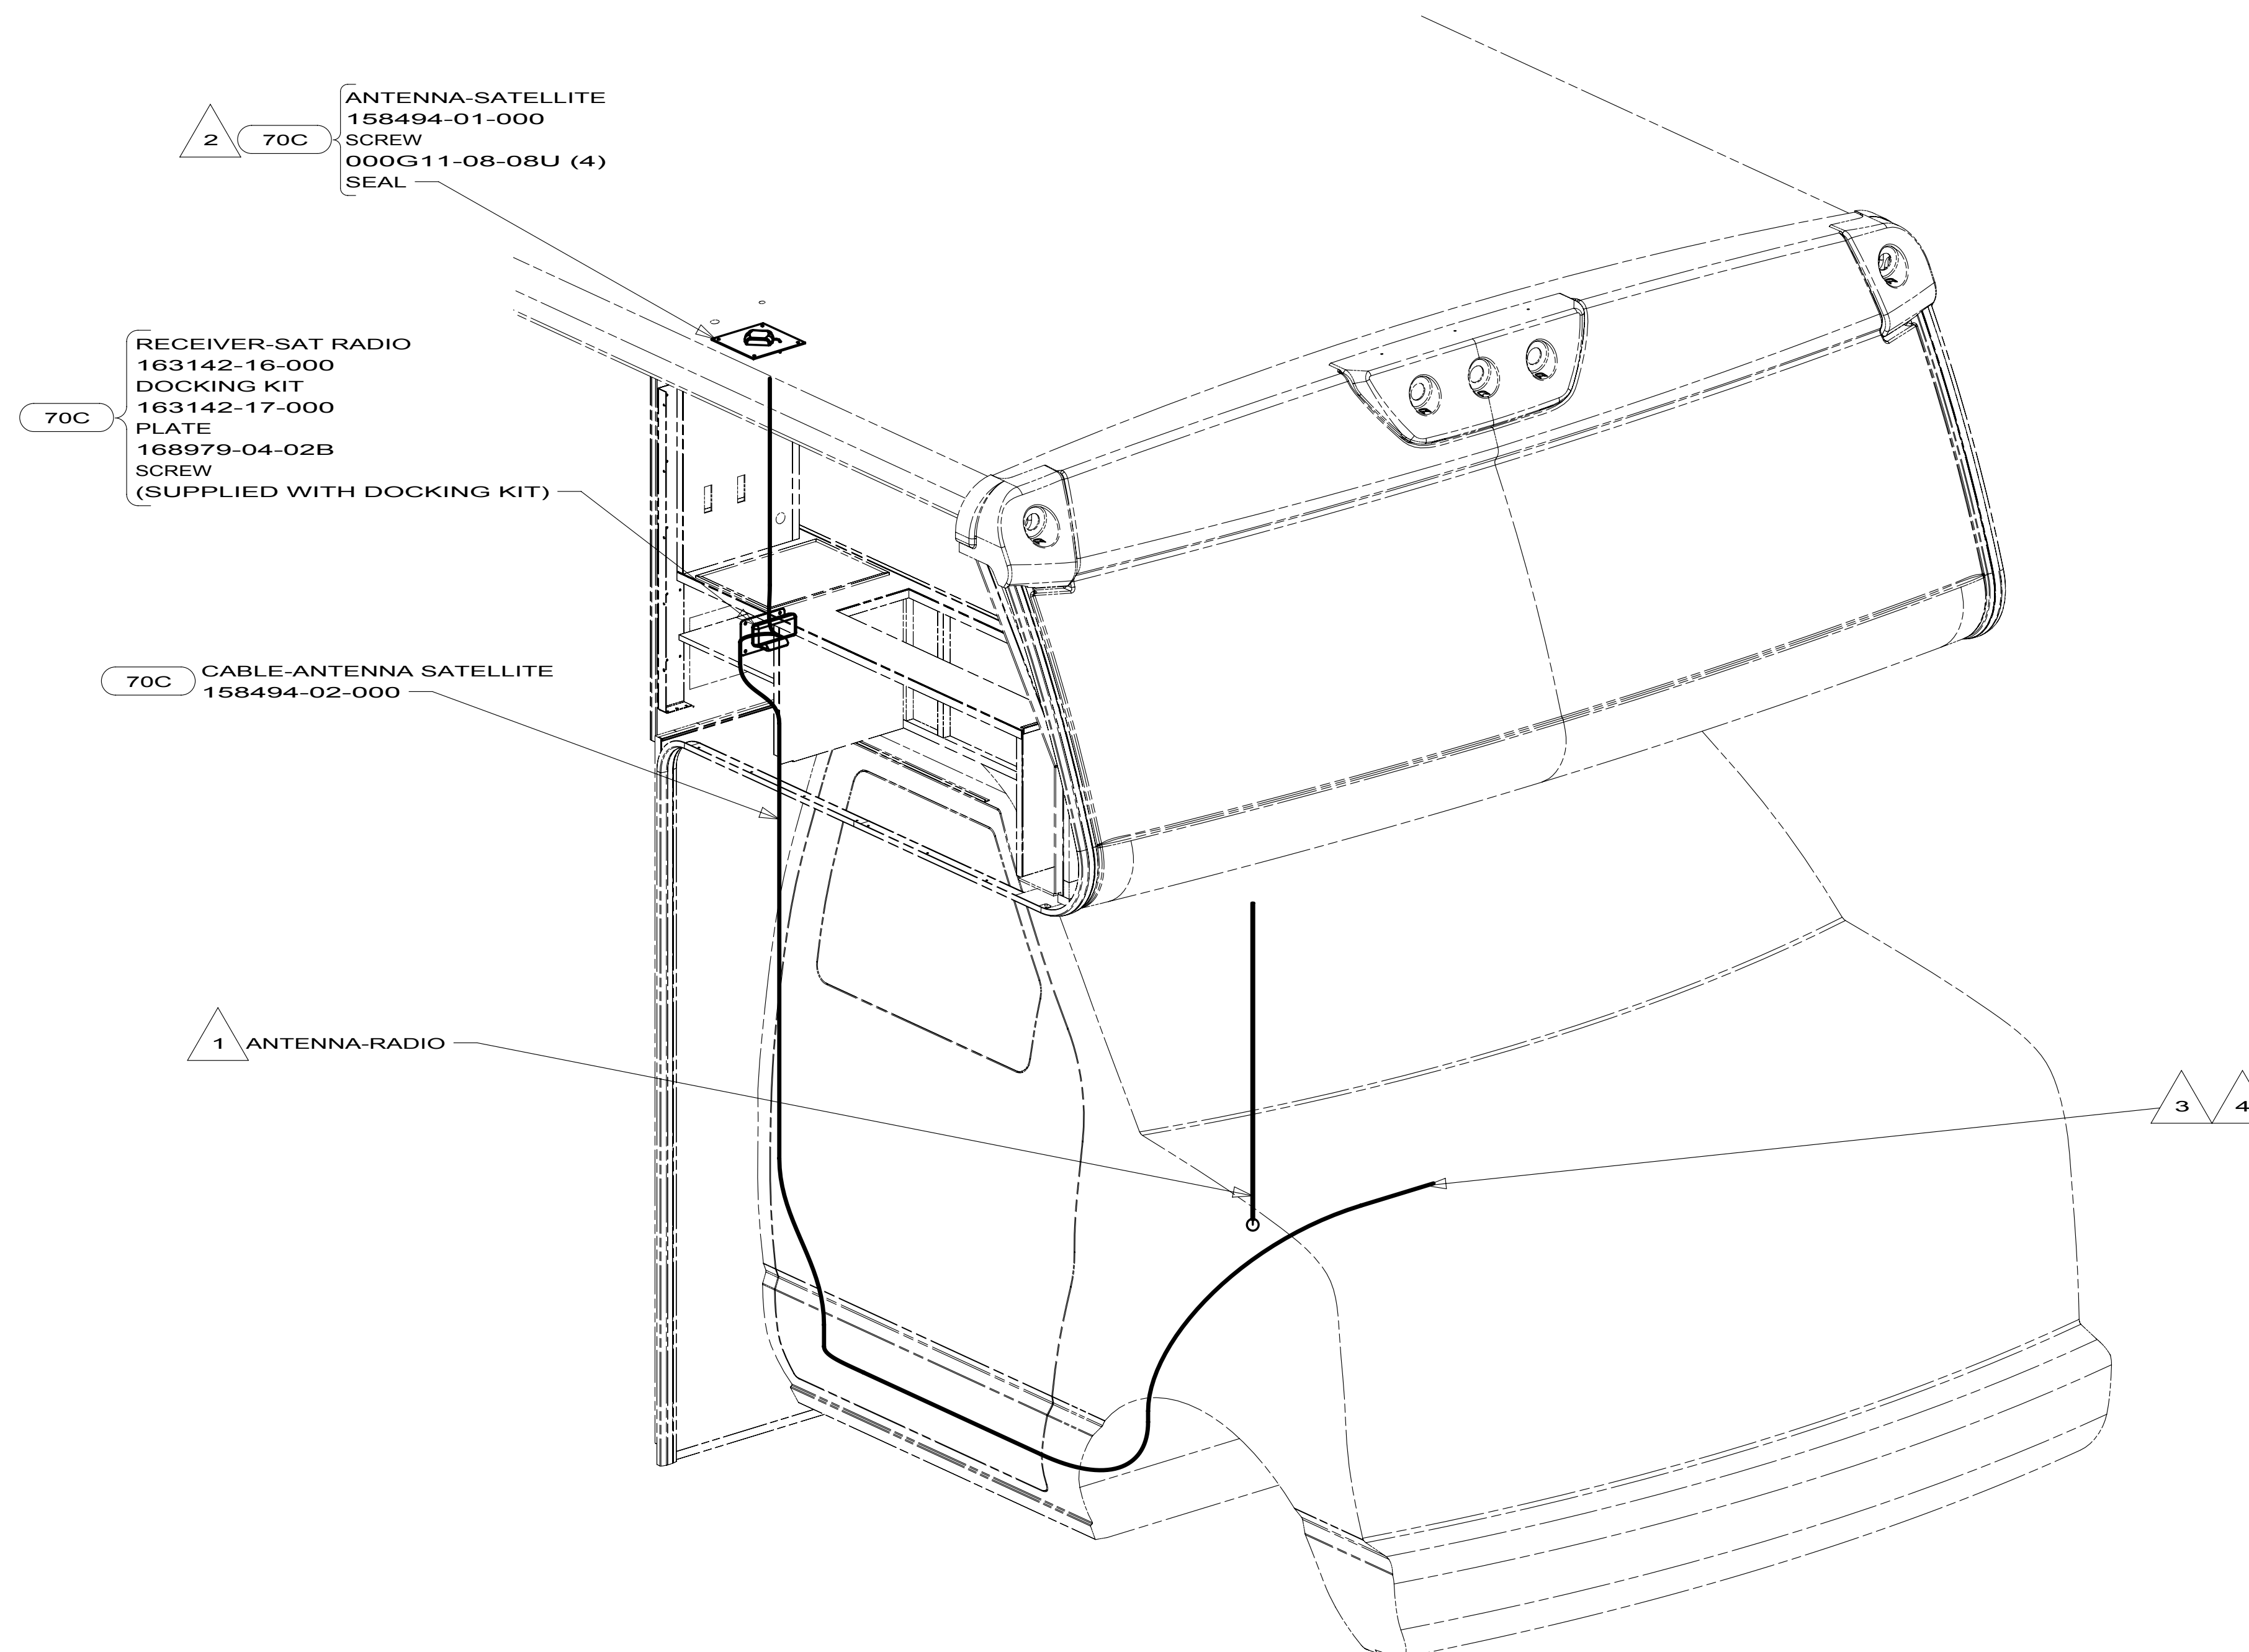170693-05-02A, 171693-07-02A
VENDOR NO
L8105



169848-01
200-SERIES

169848-02
300-SERIES

- 4 ON 300-SERIES ROUTE CABLE FROM RADIO TO PASSENGER'S STEPWELL AREA, UP B-POST, INTO WINGWALL, THROUGH SLEEP BOARD ASM, TO ENTERTAINMENT CENTER.
- 3 RECEIVER CABLE SUPPLIED WITH RECEIVER.
- 2 MOUNT ANTENNA SUCH THAT BASE IS SQUARE WITH ROOF AND HOLE IS DIRECTLY OVER HOLE IN ROOF. SEAL BOTH THE HOLE IN THE ROOF AND ANTENNA BASE AT SCREWS.
- 1 SUPPLIED WITH CHASSIS. USE SHORTEST SUPPLIED ANTENNA.

NOTES:

- 70C RADIO - SATELLITE
 - 265 CODES/STANDARDS-CSA/CMVSS
 - 1B1 CODES/STANDARDS USA

10 MOTORHOMES


ANTENNA INSTL-RADIO AND CB

2

169848

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	---

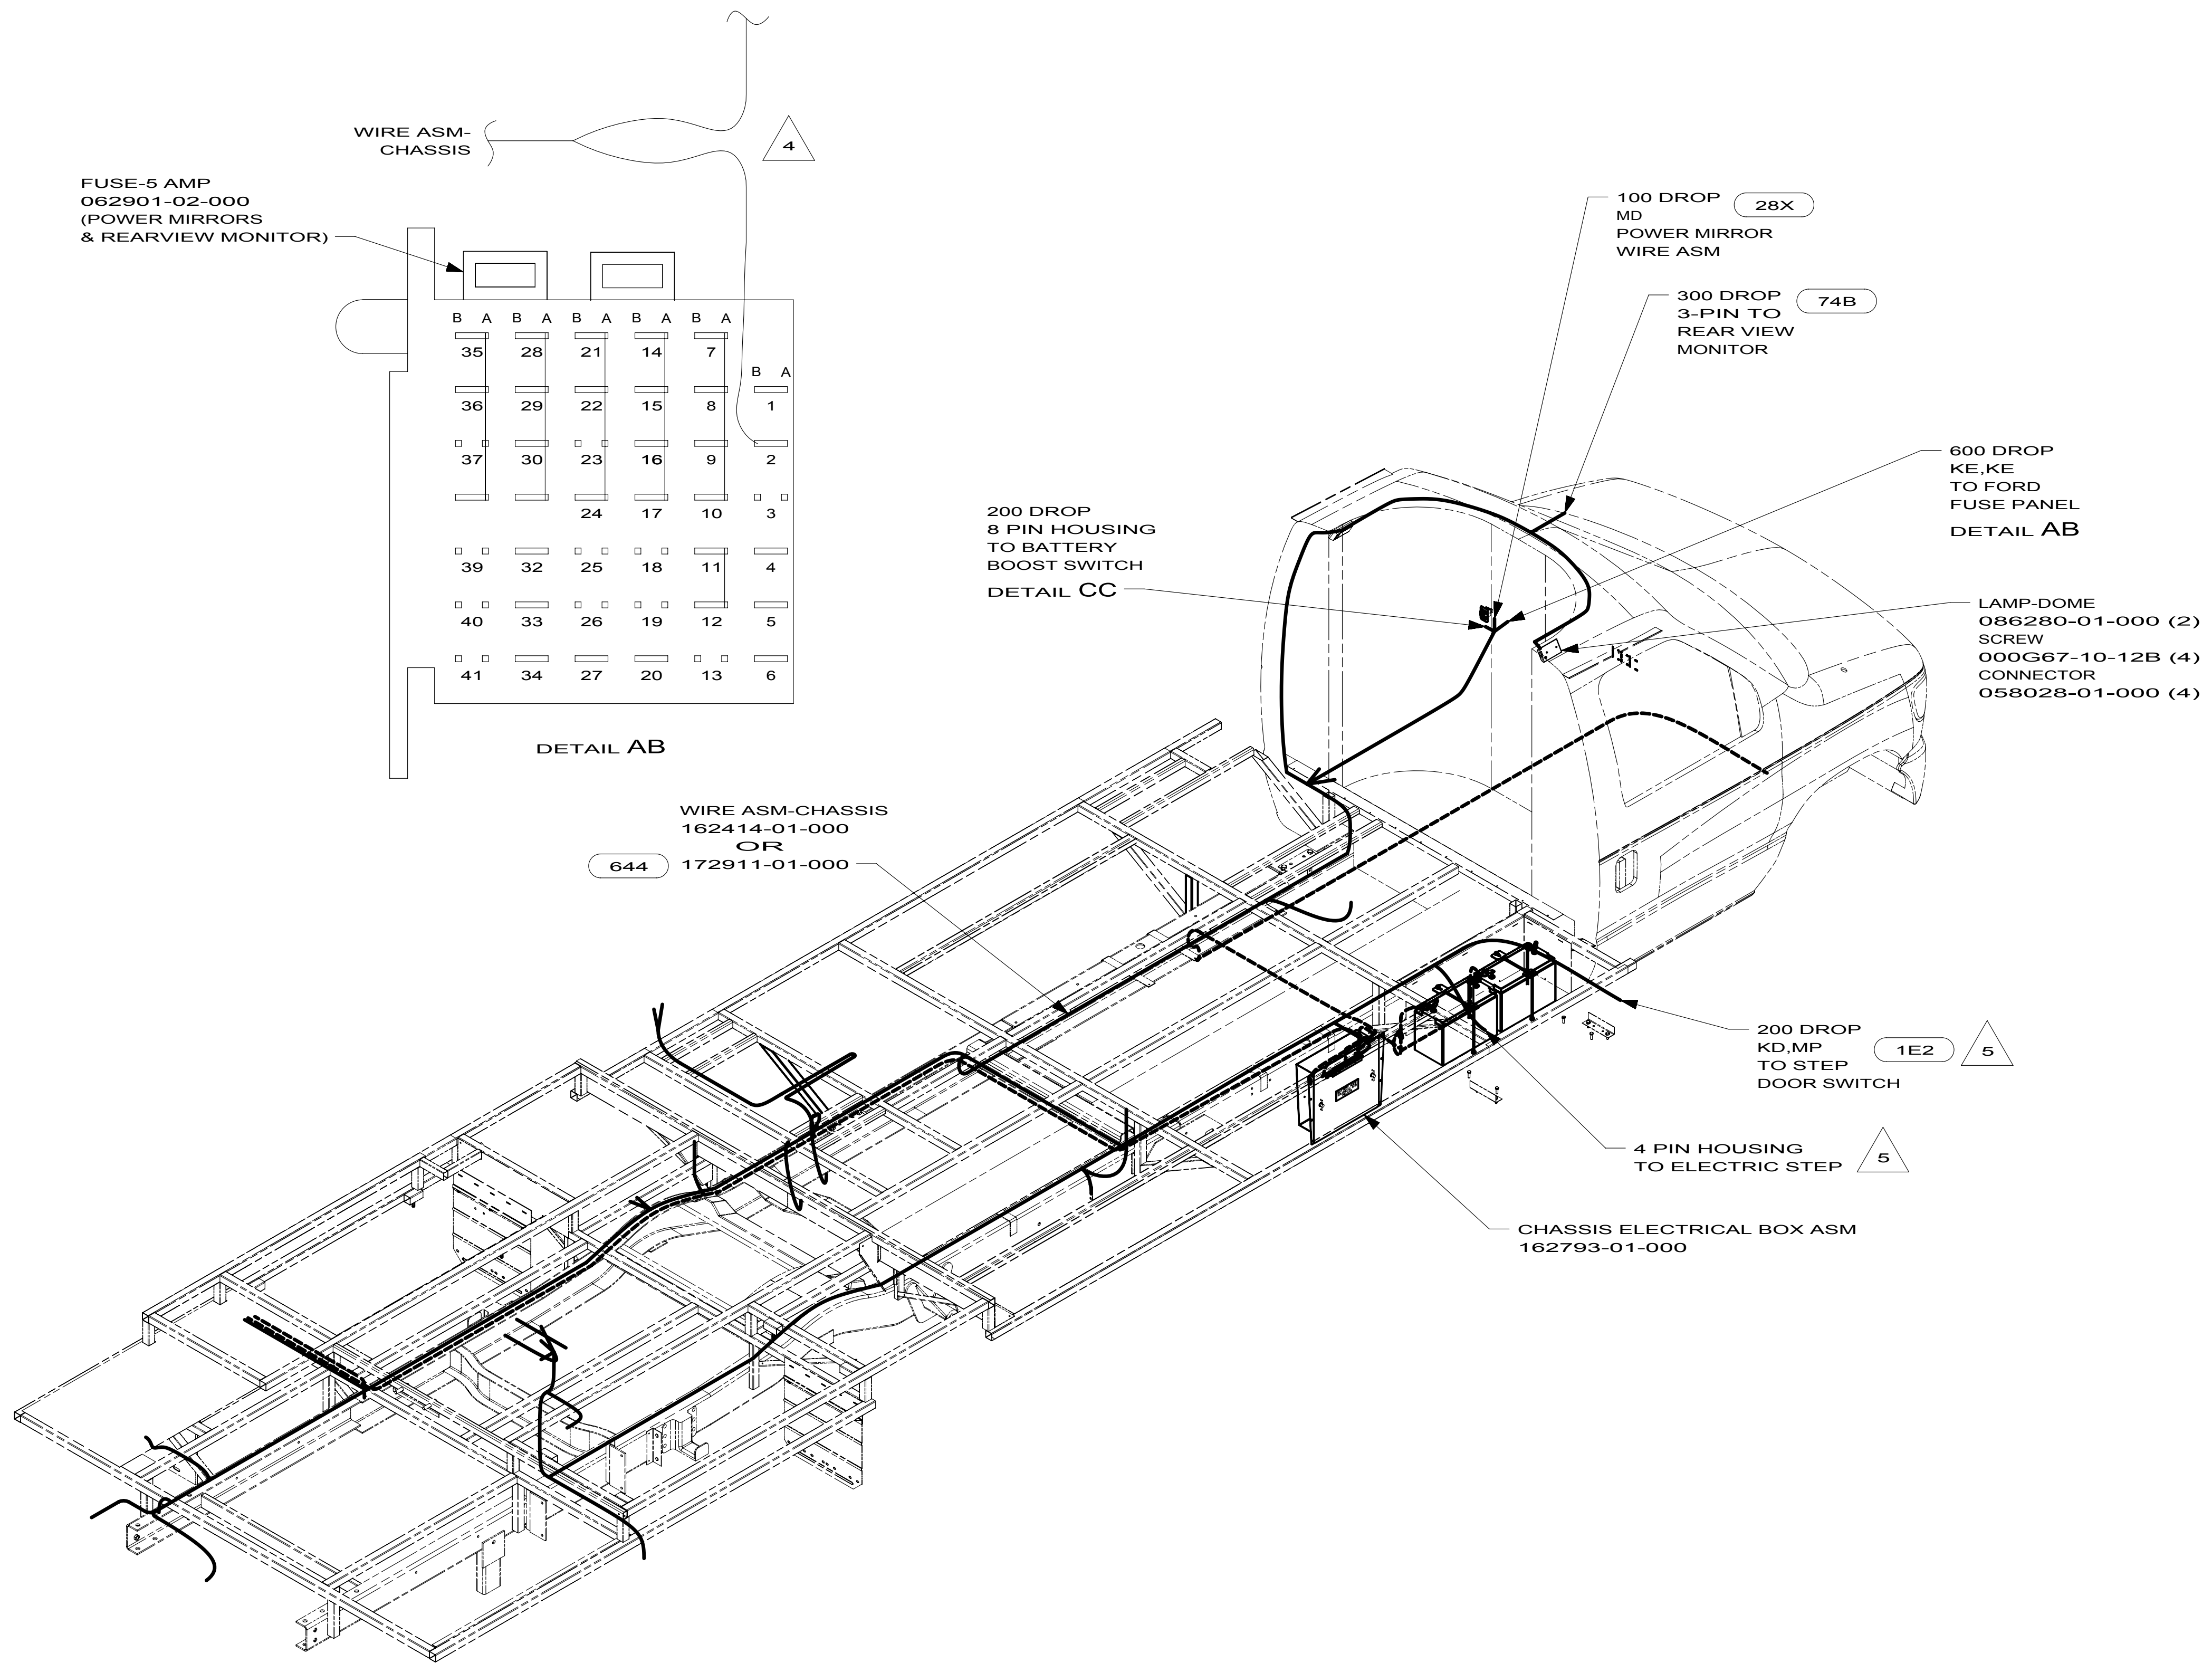

- 644 GREAT ALASKAN RENTAL PACKAGE
 - 74B REARVIEW MONITOR SYSTEM
 - 28X MIRRORS-EXTERIOR W/DEFROST
 - 1E2 ENTRANCE STEP-ELEC.
 - 16Y FORD CHASSIS - 14,500#_GVWR
 - 265 CODES/STANDARDS-CSA/CMVSS
 - 1B1 CODES/STANDARDS USA
- 1B126516Y

- 6

CUT LIGHT GREEN/RED WIRE FROM PARK BRAKE SWITCH AND RECONNECT TO CIRCUIT DY OF CHASSIS ASM AS SHOWN.
- 5

SECURE DROP BACK ALONG RAIL WITHOUT 1E2
- 4

CUT WIRE AND RECONNECT AS SHOWN.

3. USE WIRE TIES 008343-04-000 AND 116673-01-000 APPROXIMATELY 600MM ON CENTER UNLESS OTHERWISE SPECIFIED.
2. SECURE CONDUIT 041953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
1. LEGEND: — WINNEBAGO; - - - - - CABLE; - - - - - CHASSIS SUPPLIED WIRING.

NOTES:

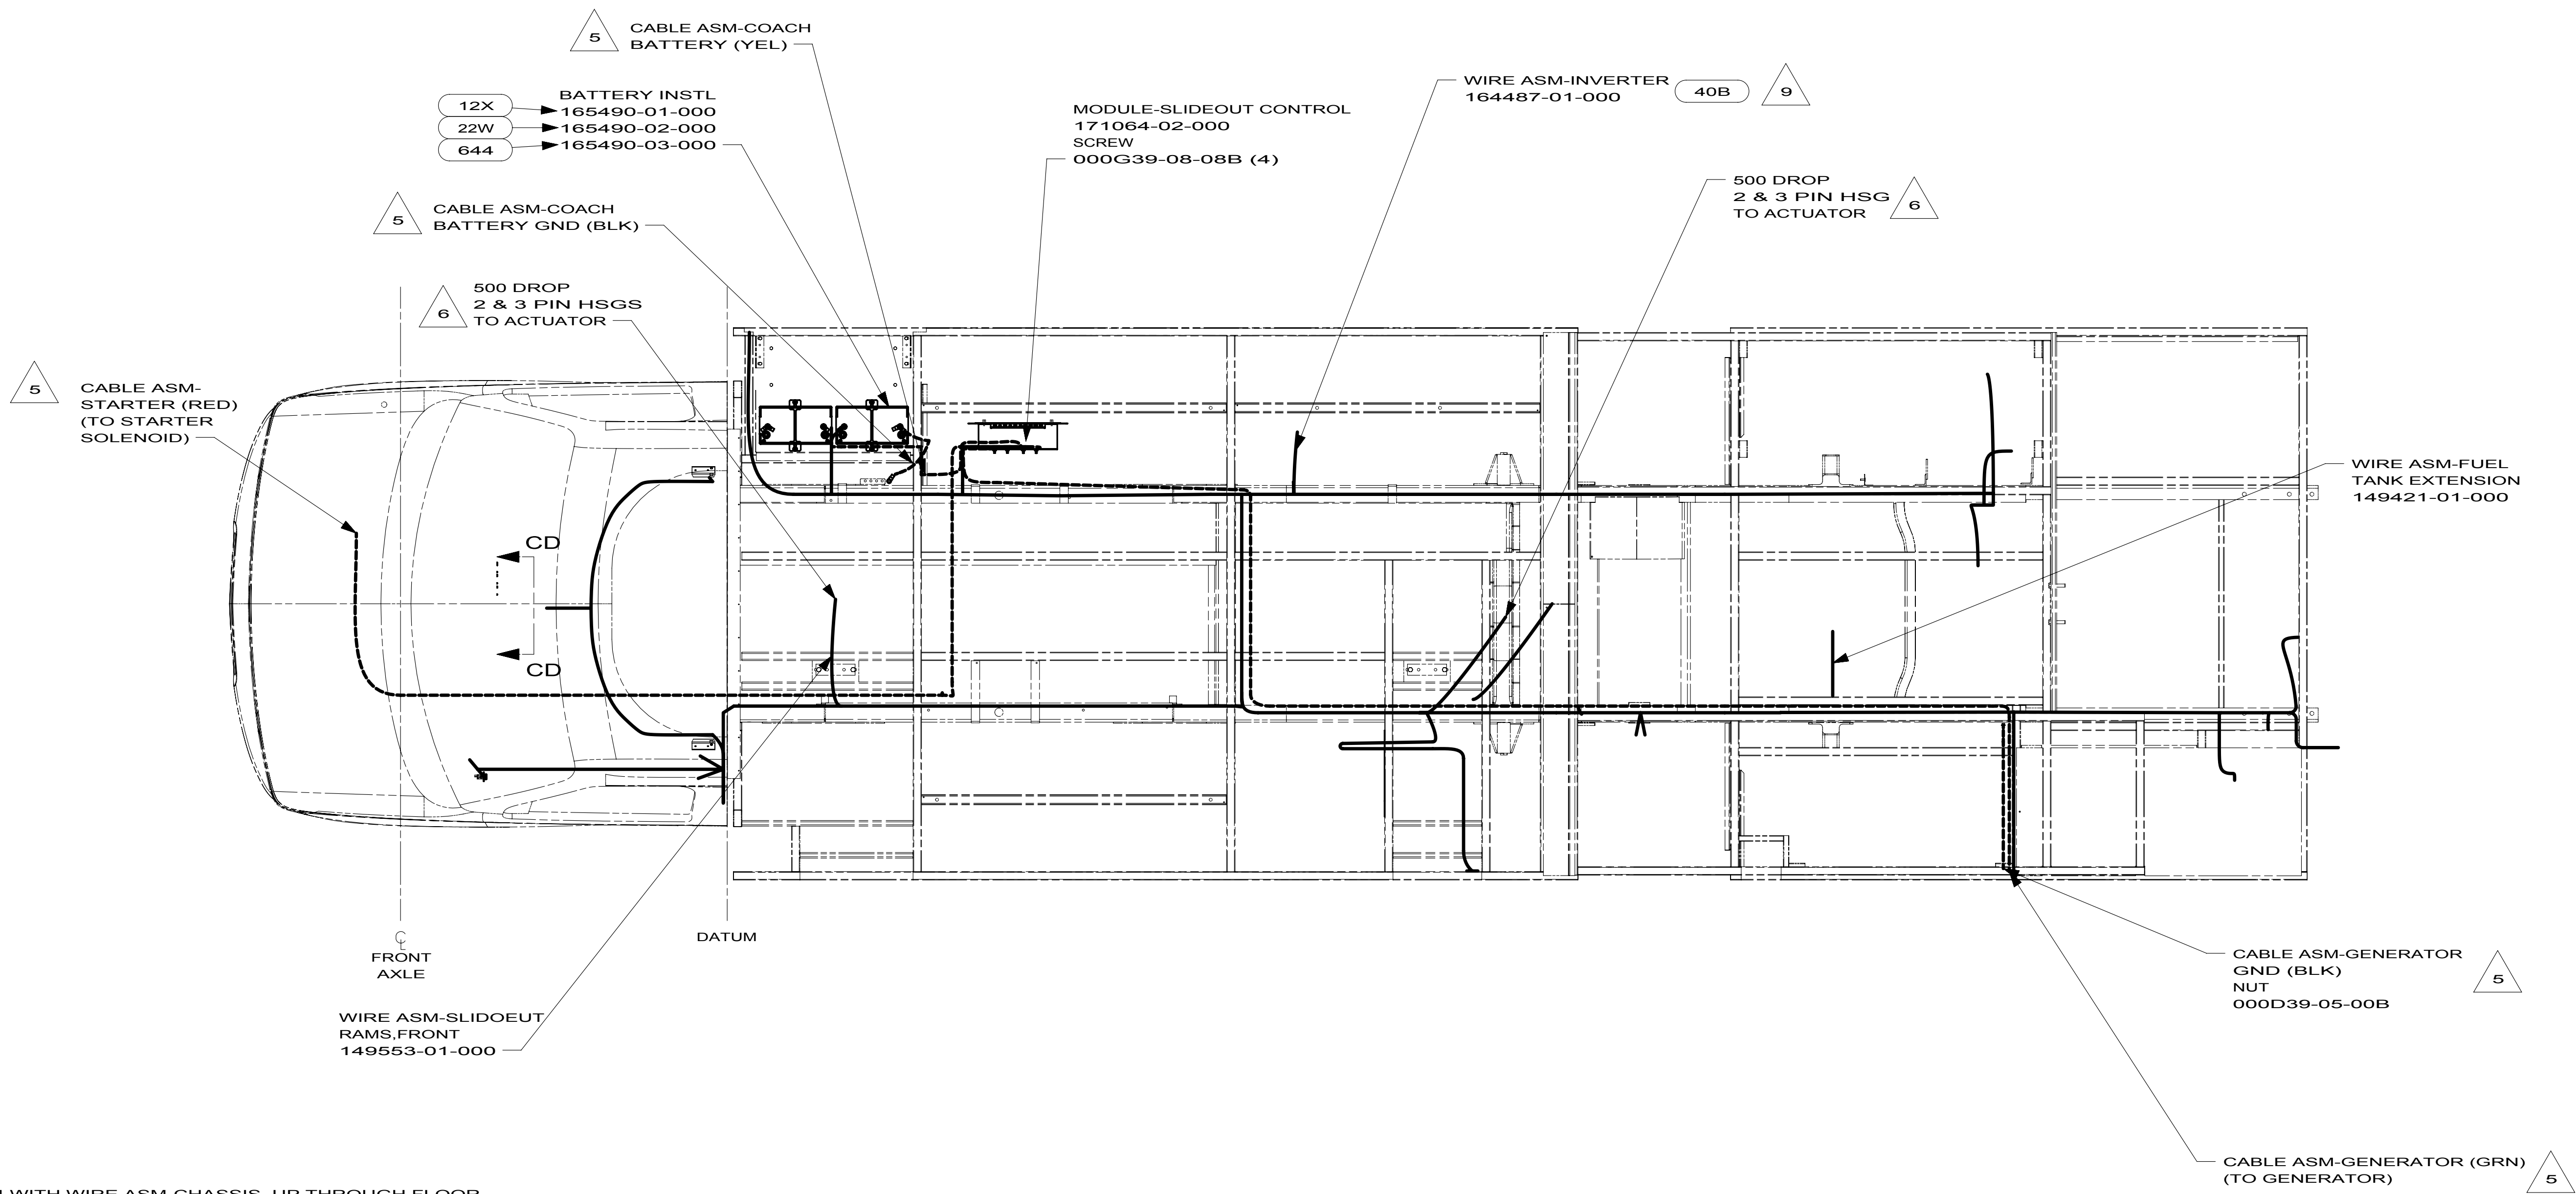
FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

WIRING INSTL-CHASSIS
1 3 165472

09 231C



- 9 ROUTE WIRE ASM-WITH WIRE ASM-CHASSIS, UP THROUGH FLOOR AT 2571, THEN TO INVERTER.
- 8 STRIP END OF FORD WIRING 20MM, THEN DOUBLE OVER BEFOR CRIMPING. HEAT CONNECTIONS WITH HEAT GUN TO SHRINK CONNECTORS. AFTER CONNECTIONS ARE COMPLETE, COVER ALL EXPOSED WIRING WITH CONDUIT 041953-01-000 AND SECURE BOTH ENDS WITH TAPE 008363-01-000 TO WIRE ASM.
- 7 CUT FORD SPEED SENSOR WIRING APPORXIMATELY 150MM BACK FROM CONNECTOR. INSTALL WIRE ASM-SPEED SENSOR IN LINE BETWEEN FORD WIRING AND SPEED SENSOR CONNECTOR, MATCHING THE COLORS OF SPEED SENSOR ASM TO THE FORD WIRE ASM COLORS.
- 6 3 PIN HOUSING IS PART OF WIRE ASM-CHASSIS AND 2 PIN HOUSING IS PART OF WIRE ASM-SLIDEOUT RAMS,FRONT.
- 5 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 4 WIRES TO BE TIED TO CROSS MEMBER USING EXISTING HOLES.
- 3 WIRES TO BE TIED TO TOP OF RAIL USING EXISTING HOLES.
- 2 WIRES TO BE TIED TO INSIDE OF RAIL USING EXISTING HOLES.
- 1 CUT OFF EXCESS END OF WIRE TIE.

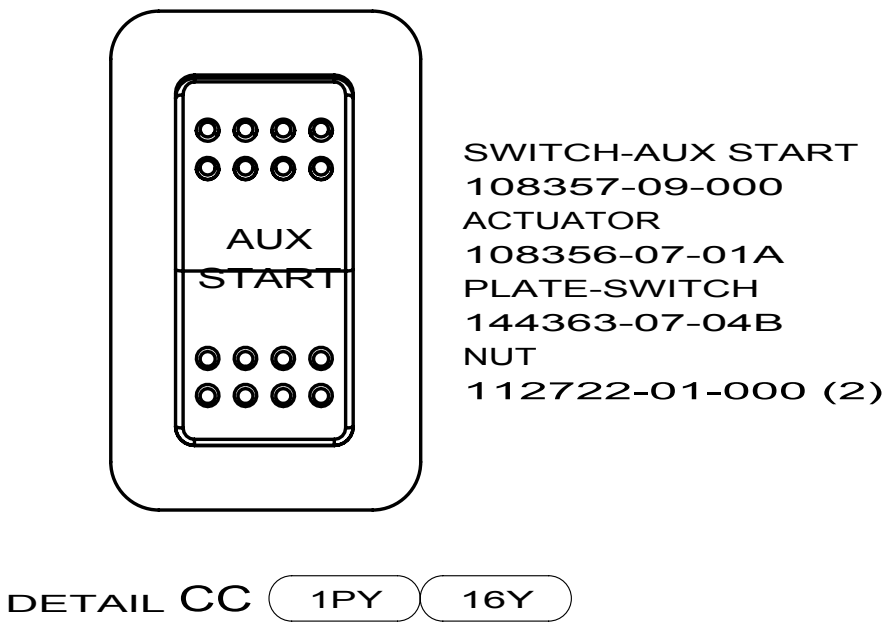
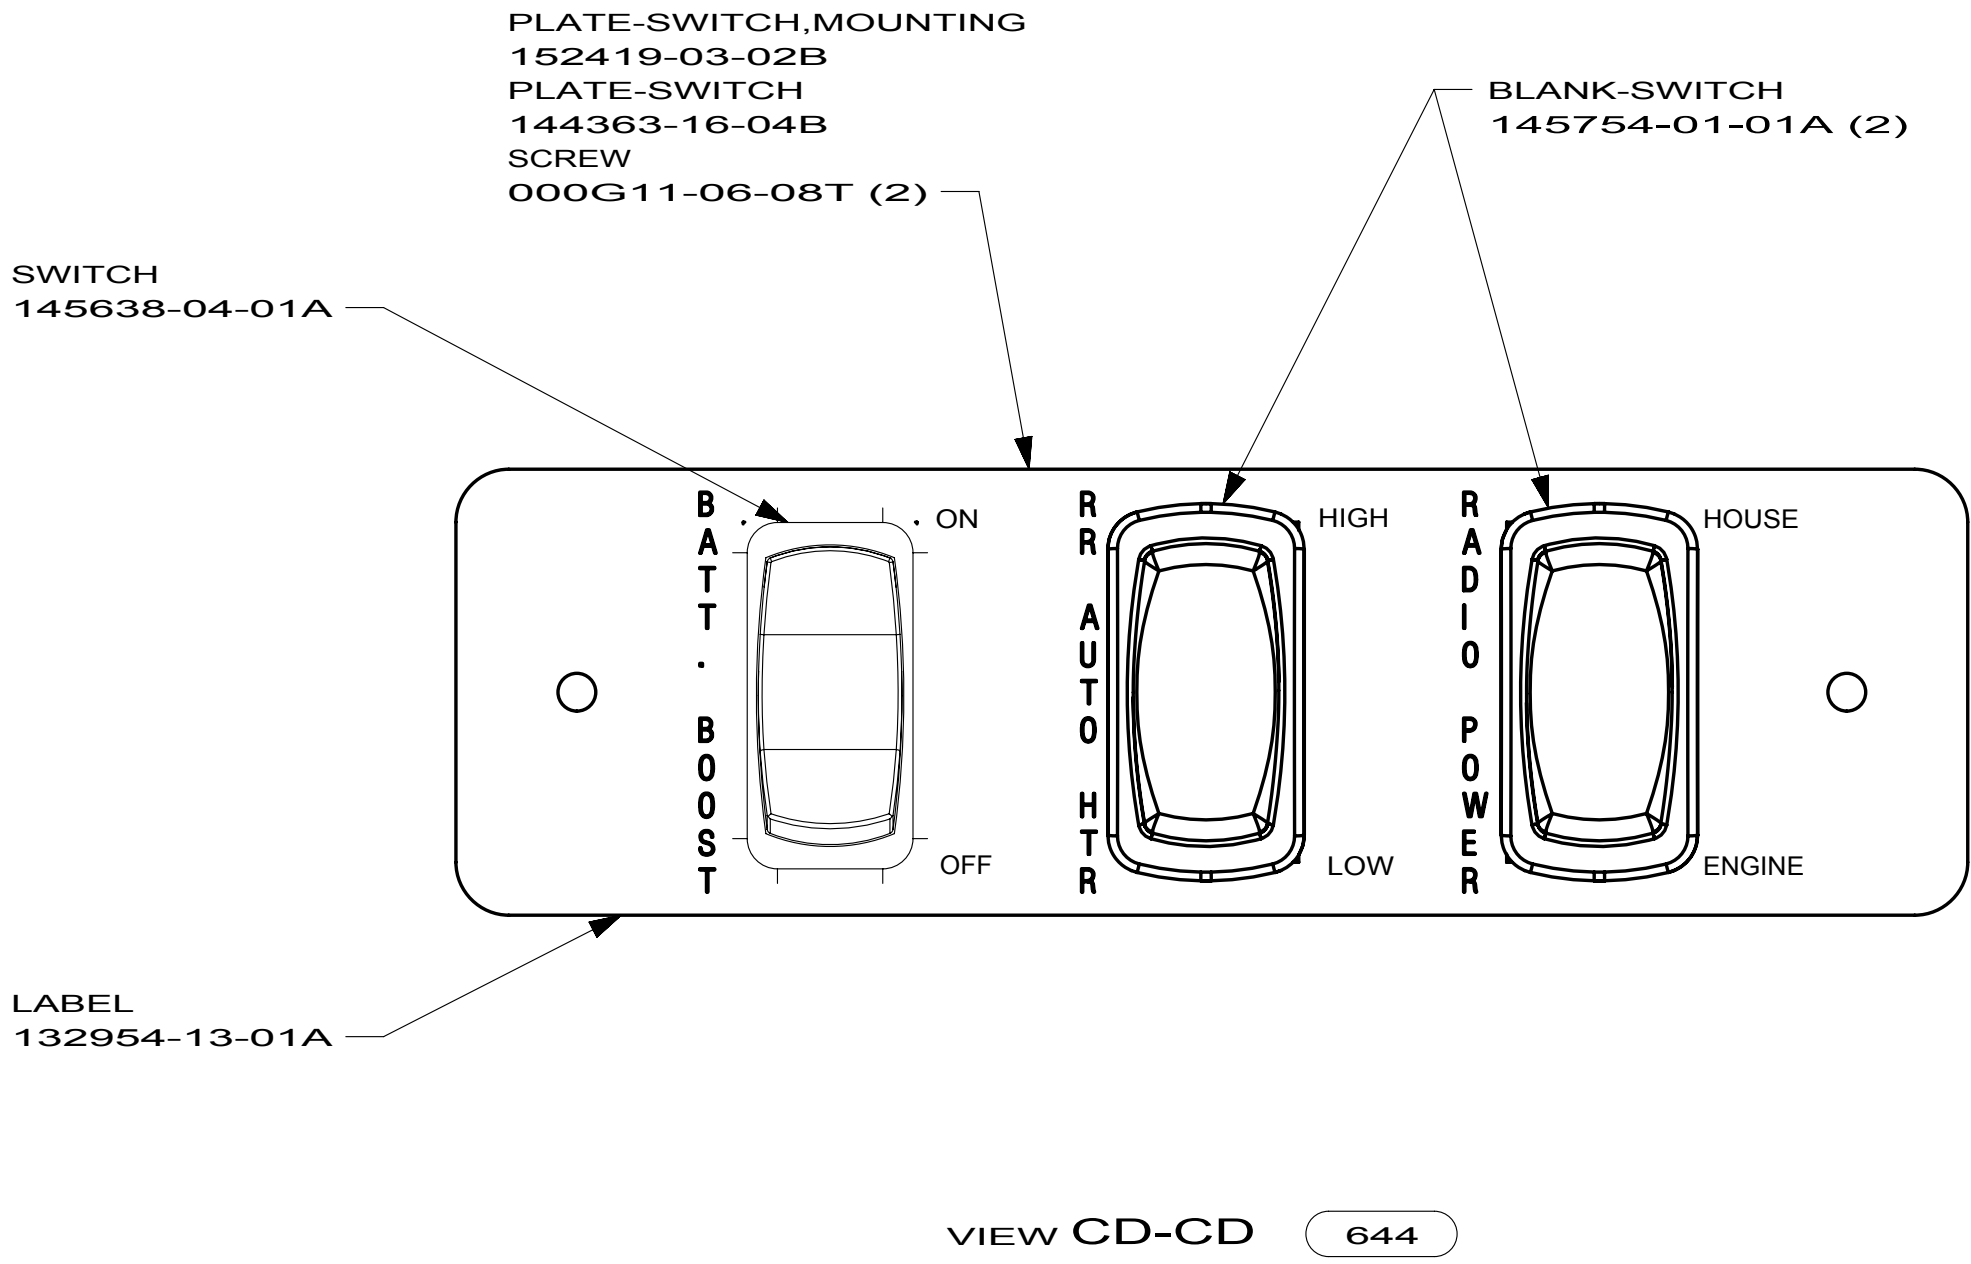
- 40B INVERTER-DC/AC, 300 WATT
- 644 GREAT ALASKAN RENTAL PACKAGE
- 22W BATTERY-SECOND
- 12X BATTERY-ONE
- 16Y FORD CHASSIS - 14,500#_GVWR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265 16Y

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

09 231C

WIRING INSTL-CHASSIS




FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 644 GREAT ALASKAN RENTAL PACKAGE
- 1PY CHEVY CHASSIS 14,050 LB GVWR
- 16Y FORD CHASSIS - 14,500#_GVWR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

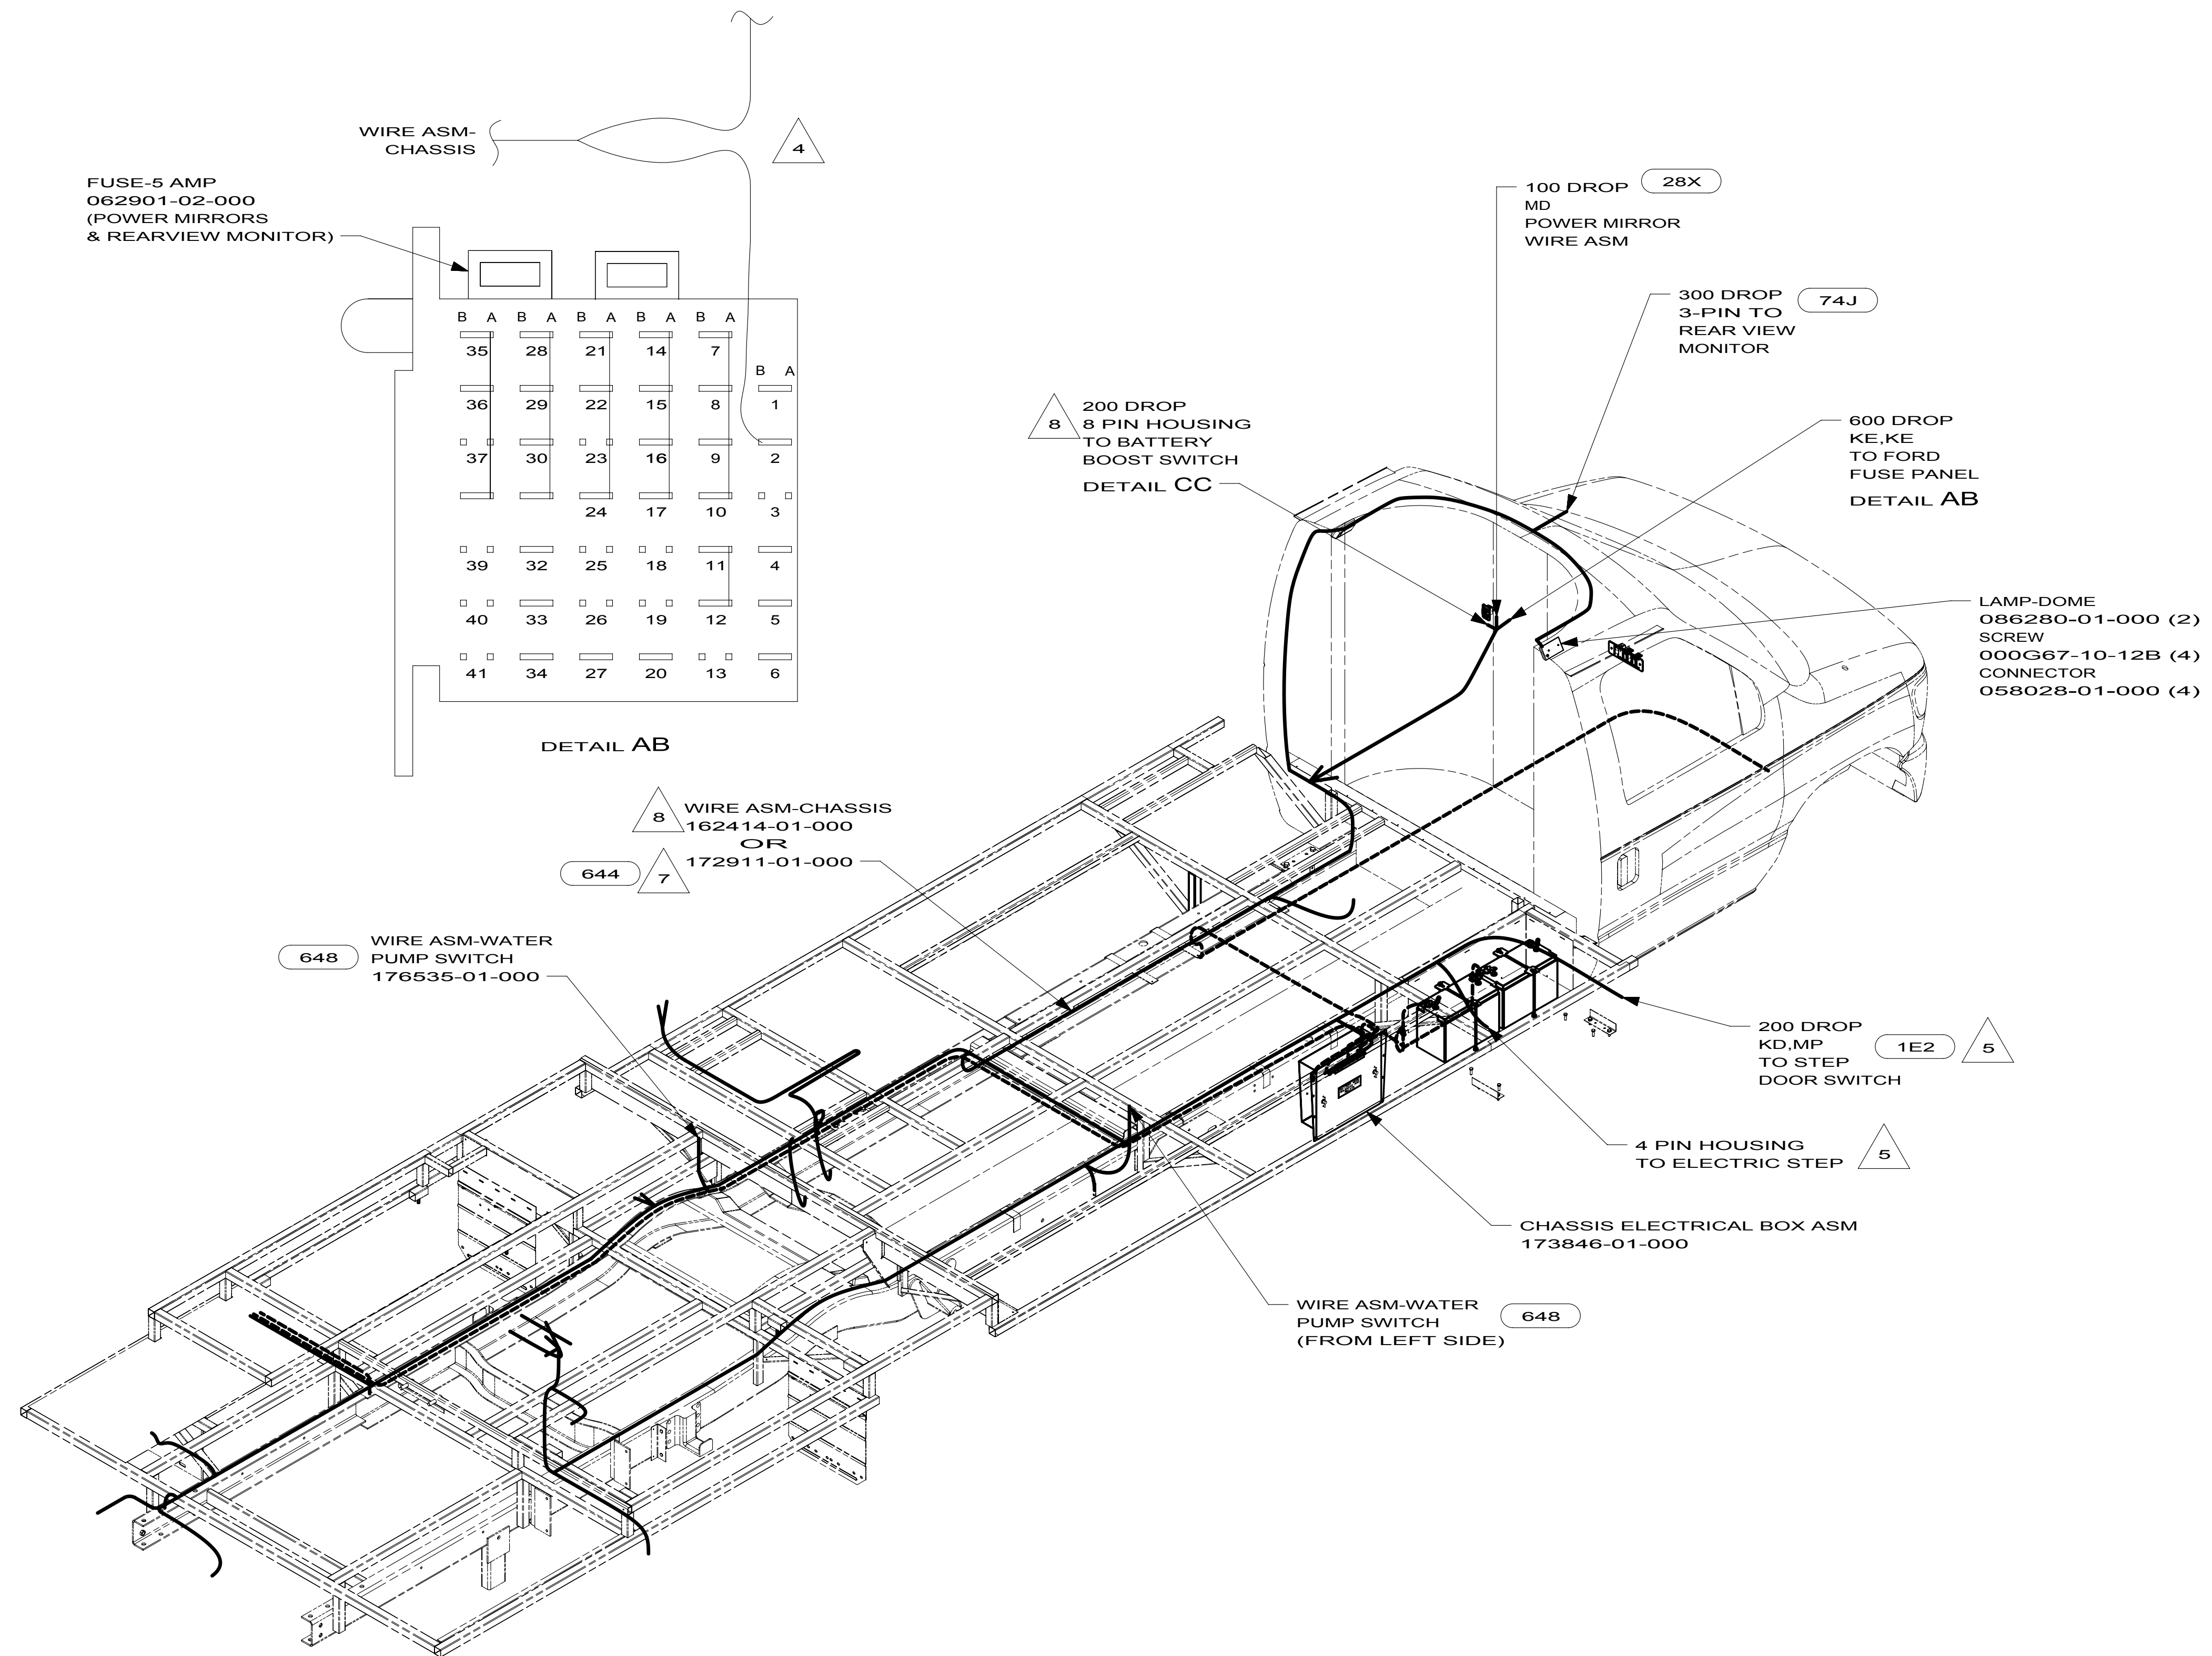09 231C



- 8 USED ON THE 08 FORD CHASSIS.
 - 7 USED ON THE 09 FORD CHASSIS.
 - 6 CUT LIGHT GREEN/RED WIRE FROM PARK BRAKE SWITCH AND RECONNECT TO CIRCUIT DY OF CHASSIS ASM AS SHOWN.
 - 5 SECURE DROP BACK ALONG RAIL WITHOUT 1E2
 - 4 CUT WIRE AND RECONNECT AS SHOWN.

3. USE WIRE TIES 008343-04-000 AND 116673-01-000 APPROXIMATELY 600MM ON CENTER UNLESS OTHERWISE SPECIFIED.

2. SECURE CONDUIT 041953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1. LEGEND: ~~WINNEBAGO~~:-----CABLE: ---CHASSIS SUPPLIED WIRING.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

WIRING INSTL-CHASSIS

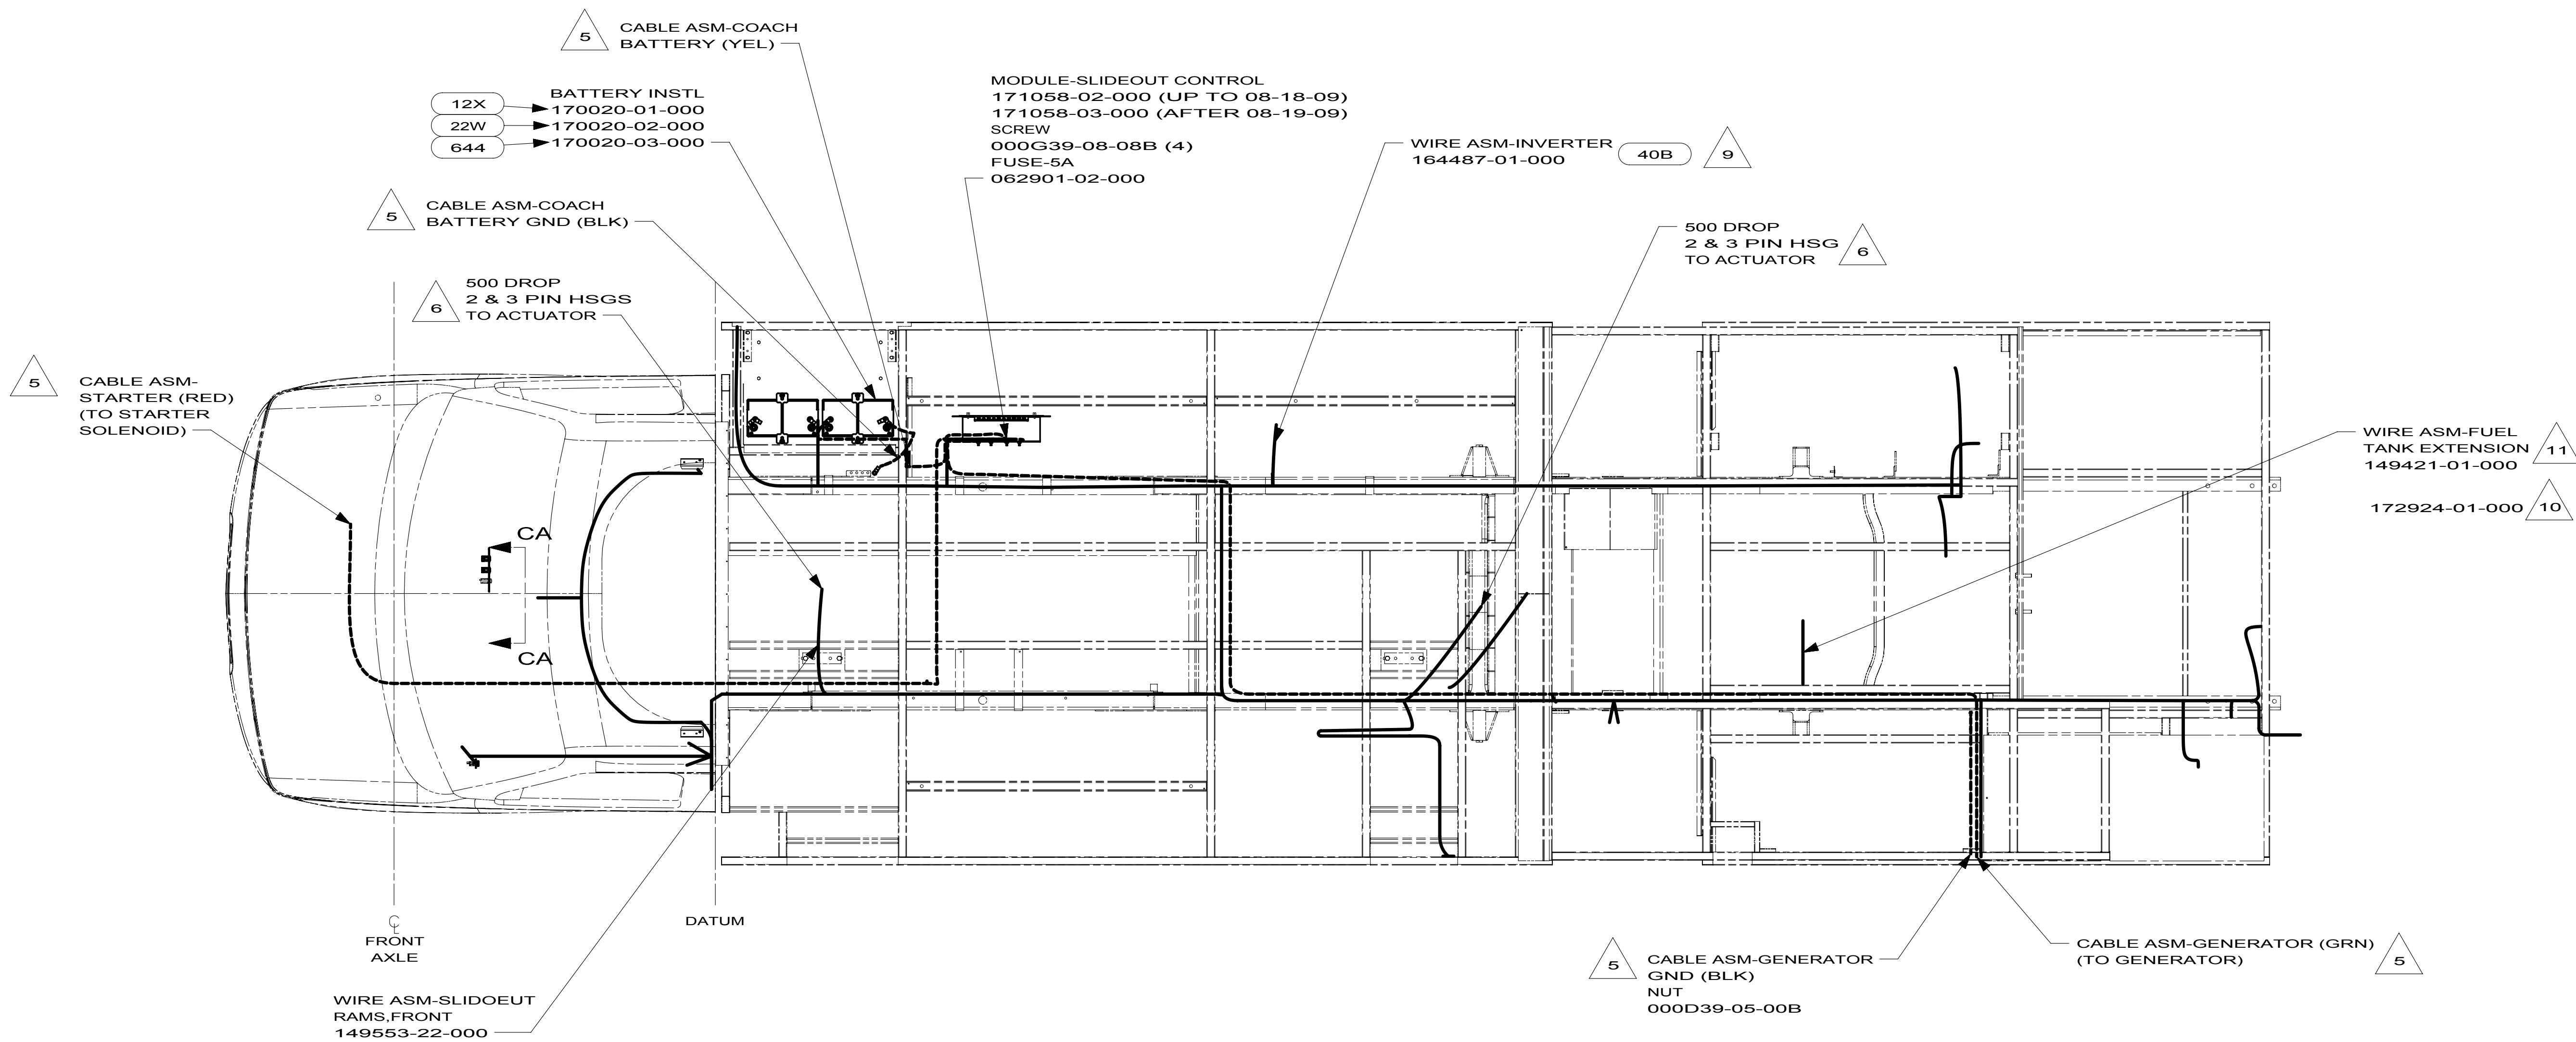1 3 173193



- 11 USED ON THE 08 FORD CHASSIS.
- 10 USED ON THE 09 FORD CHASSIS.
- 9 ROUTE WIRE ASM-WITH WIRE ASM-CHASSIS, UP THROUGH FLOOR AT 2571, THEN TO INVERTER.
- 8 STRIP END OF FORD WIRING 20MM, THEN DOUBLE OVER BEFOR CRIMPING. HEAT CONNECTIONS WITH HEAT GUN TO SHRINK CONNECTORS. AFTER CONNECTIONS ARE COMPLETE, COVER ALL EXPOSED WIRING WITH CONDUIT 041953-01-000 AND SECURE BOTH ENDS WITH TAPE 008363-01-000 TO WIRE ASM.
- 7 CUT FORD SPEED SENSOR WIRING APPORXIMATELY 150MM BACK FROM CONNECTOR. INSTALL WIRE ASM-SPEED SENSOR IN LINE BETWEEN FORD WIRING AND SPEED SENSOR CONNECTOR, MATCHING THE COLORS OF SPEED SENSOR ASM TO THE FORD WIRE ASM COLORS.
- 6 3 PIN HOUSING IS PART OF WIRE ASM-CHASSIS AND 2 PIN HOUSING IS PART OF WIRE ASM-SLIDEOUT RAMS,FRONT.
- 5 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 4 WIRES TO BE TIED TO CROSS MEMBER USING EXISTING HOLES.
- 3 WIRES TO BE TIED TO TOP OF RAIL USING EXISTING HOLES.
- 2 WIRES TO BE TIED TO INSIDE OF RAIL USING EXISTING HOLES.
- 1 CUT OFF EXCESS END OF WIRE TIE.

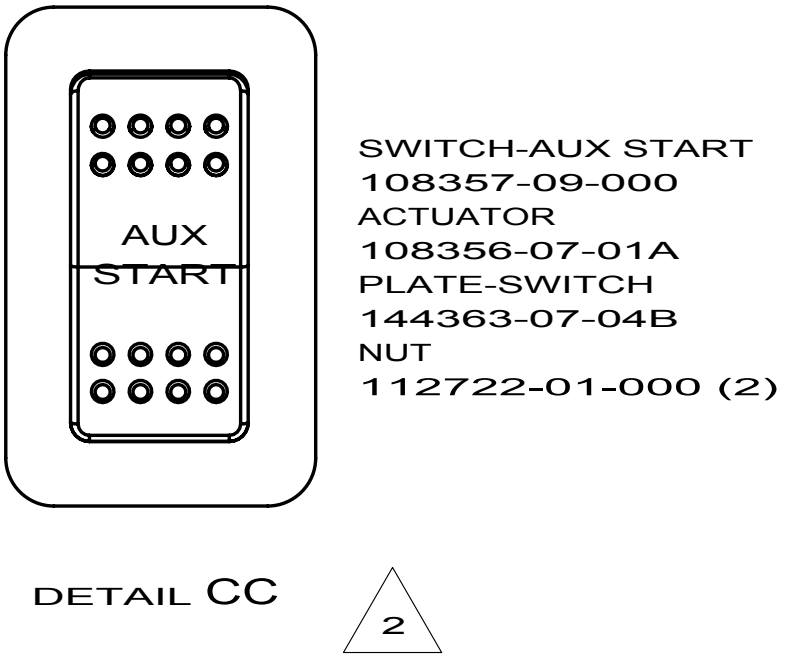
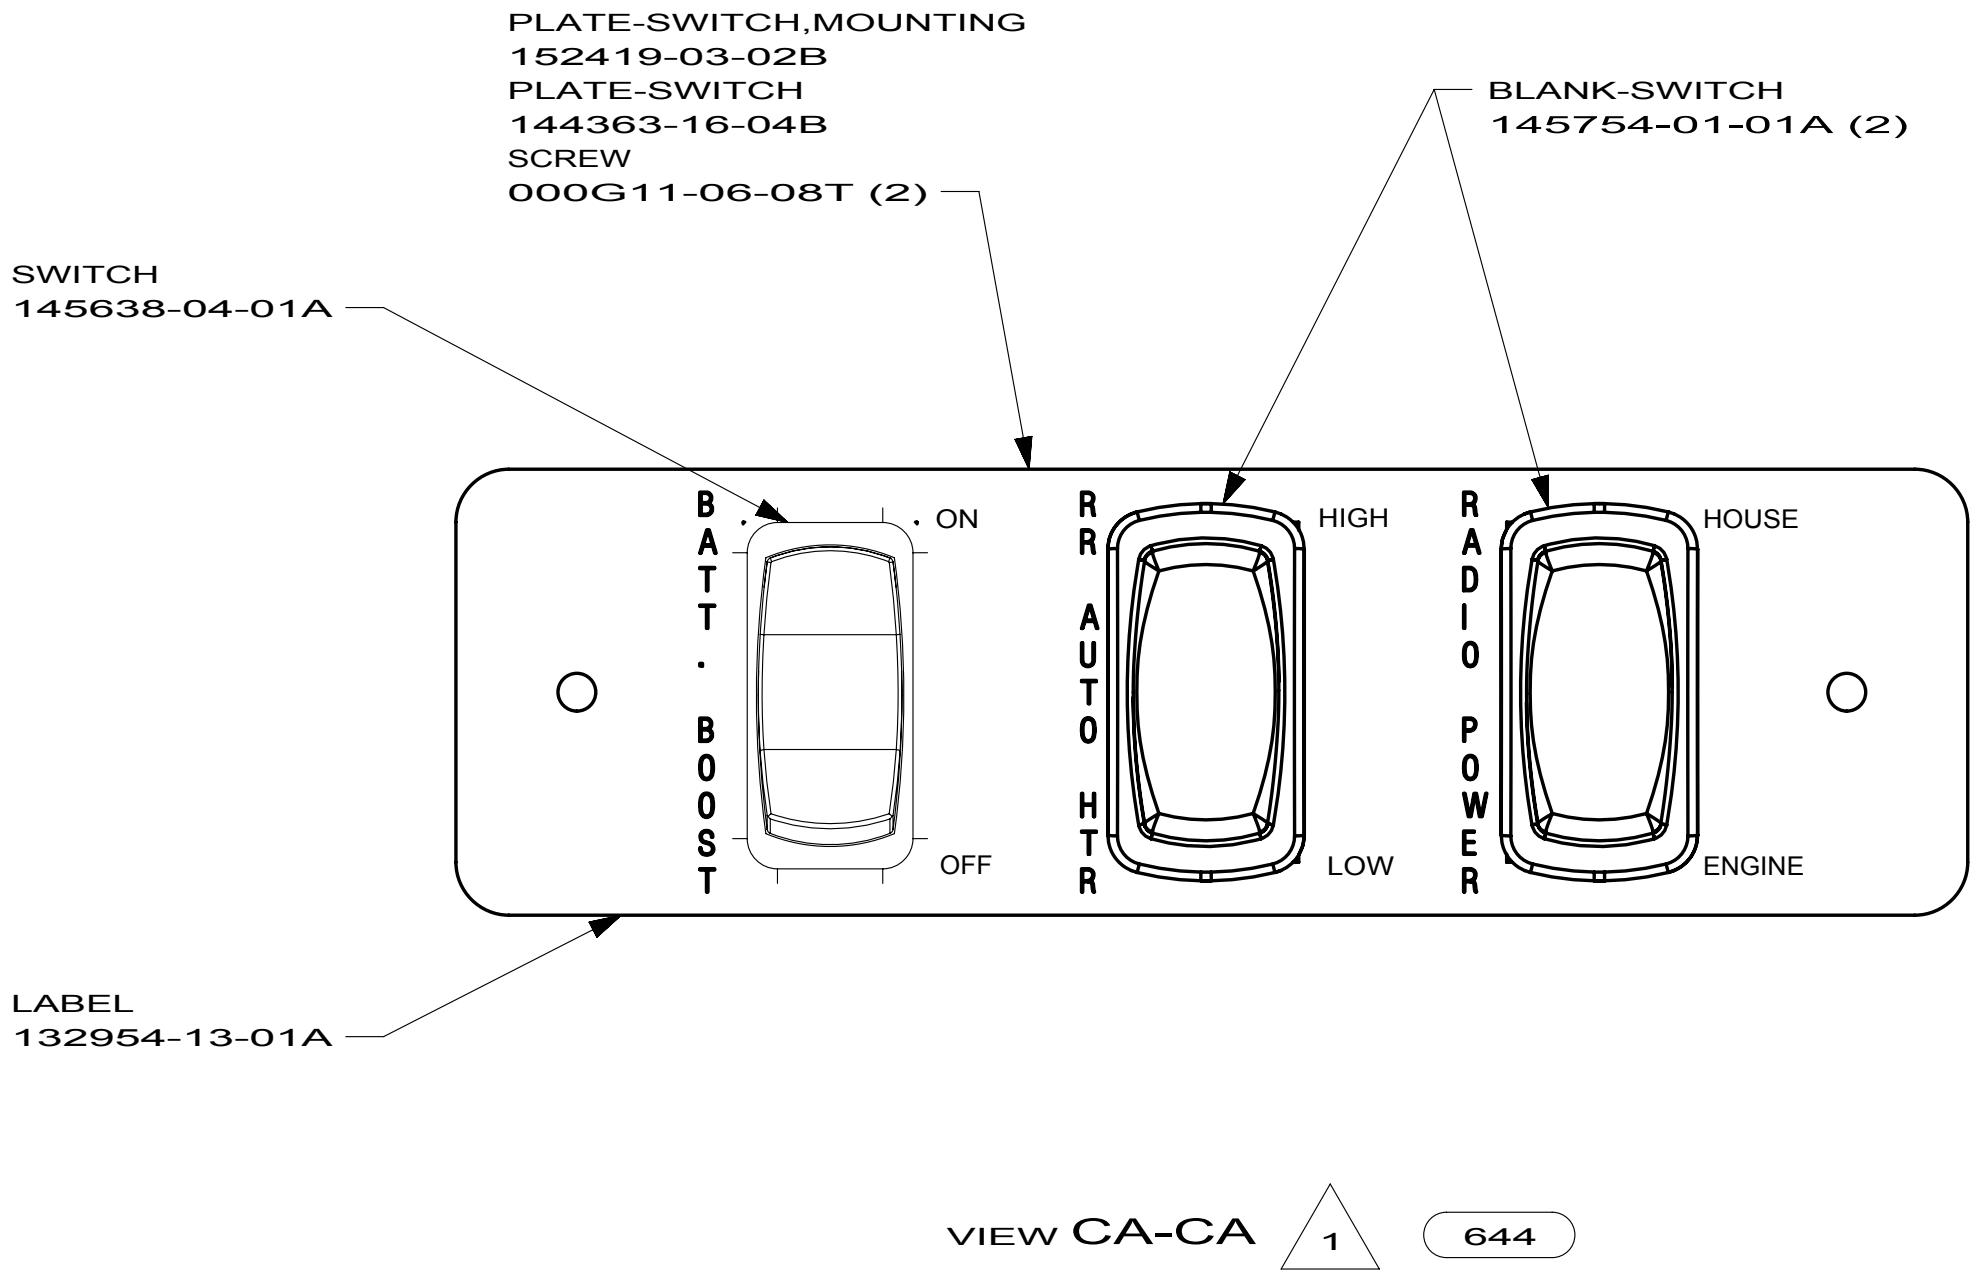
- 40B INVERTER-DC/AC, 300 WATT
 - 644 GREAT ALASKAN RENTAL PACKAGE
 - 22W BATTERY-SECOND
 - 12X BATTERY-ONE
 - 16Y FORD CHASSIS - 14,500#_GVWR
 - 265 CODES/STANDARDS-CSA/CMVSS
 - 1B1 CODES/STANDARDS USA
- 1B1 265 16Y

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

NOTES:



2 USED ON THE 08 FORD CHASSIS.

1 USED ON THE 09 FORD CHASSIS.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 644 GREAT ALASKAN RENTAL PACKAGE
 - 16Y FORD CHASSIS - 14,500#_GVWR
 - 265 CODES/STANDARDS-CSA/CMVSS
 - 1B1 CODES/STANDARDS USA
- 1B1 265


10 231C

WIRING INSTL-CHASSIS

3 173193

KEY	PART NUMBER	U/M DESCRIPTION
	086280-01-700	EA BULB - 12 VOLT - #1414

	086280-01-000
VENDOR NO.	
ARP1089	

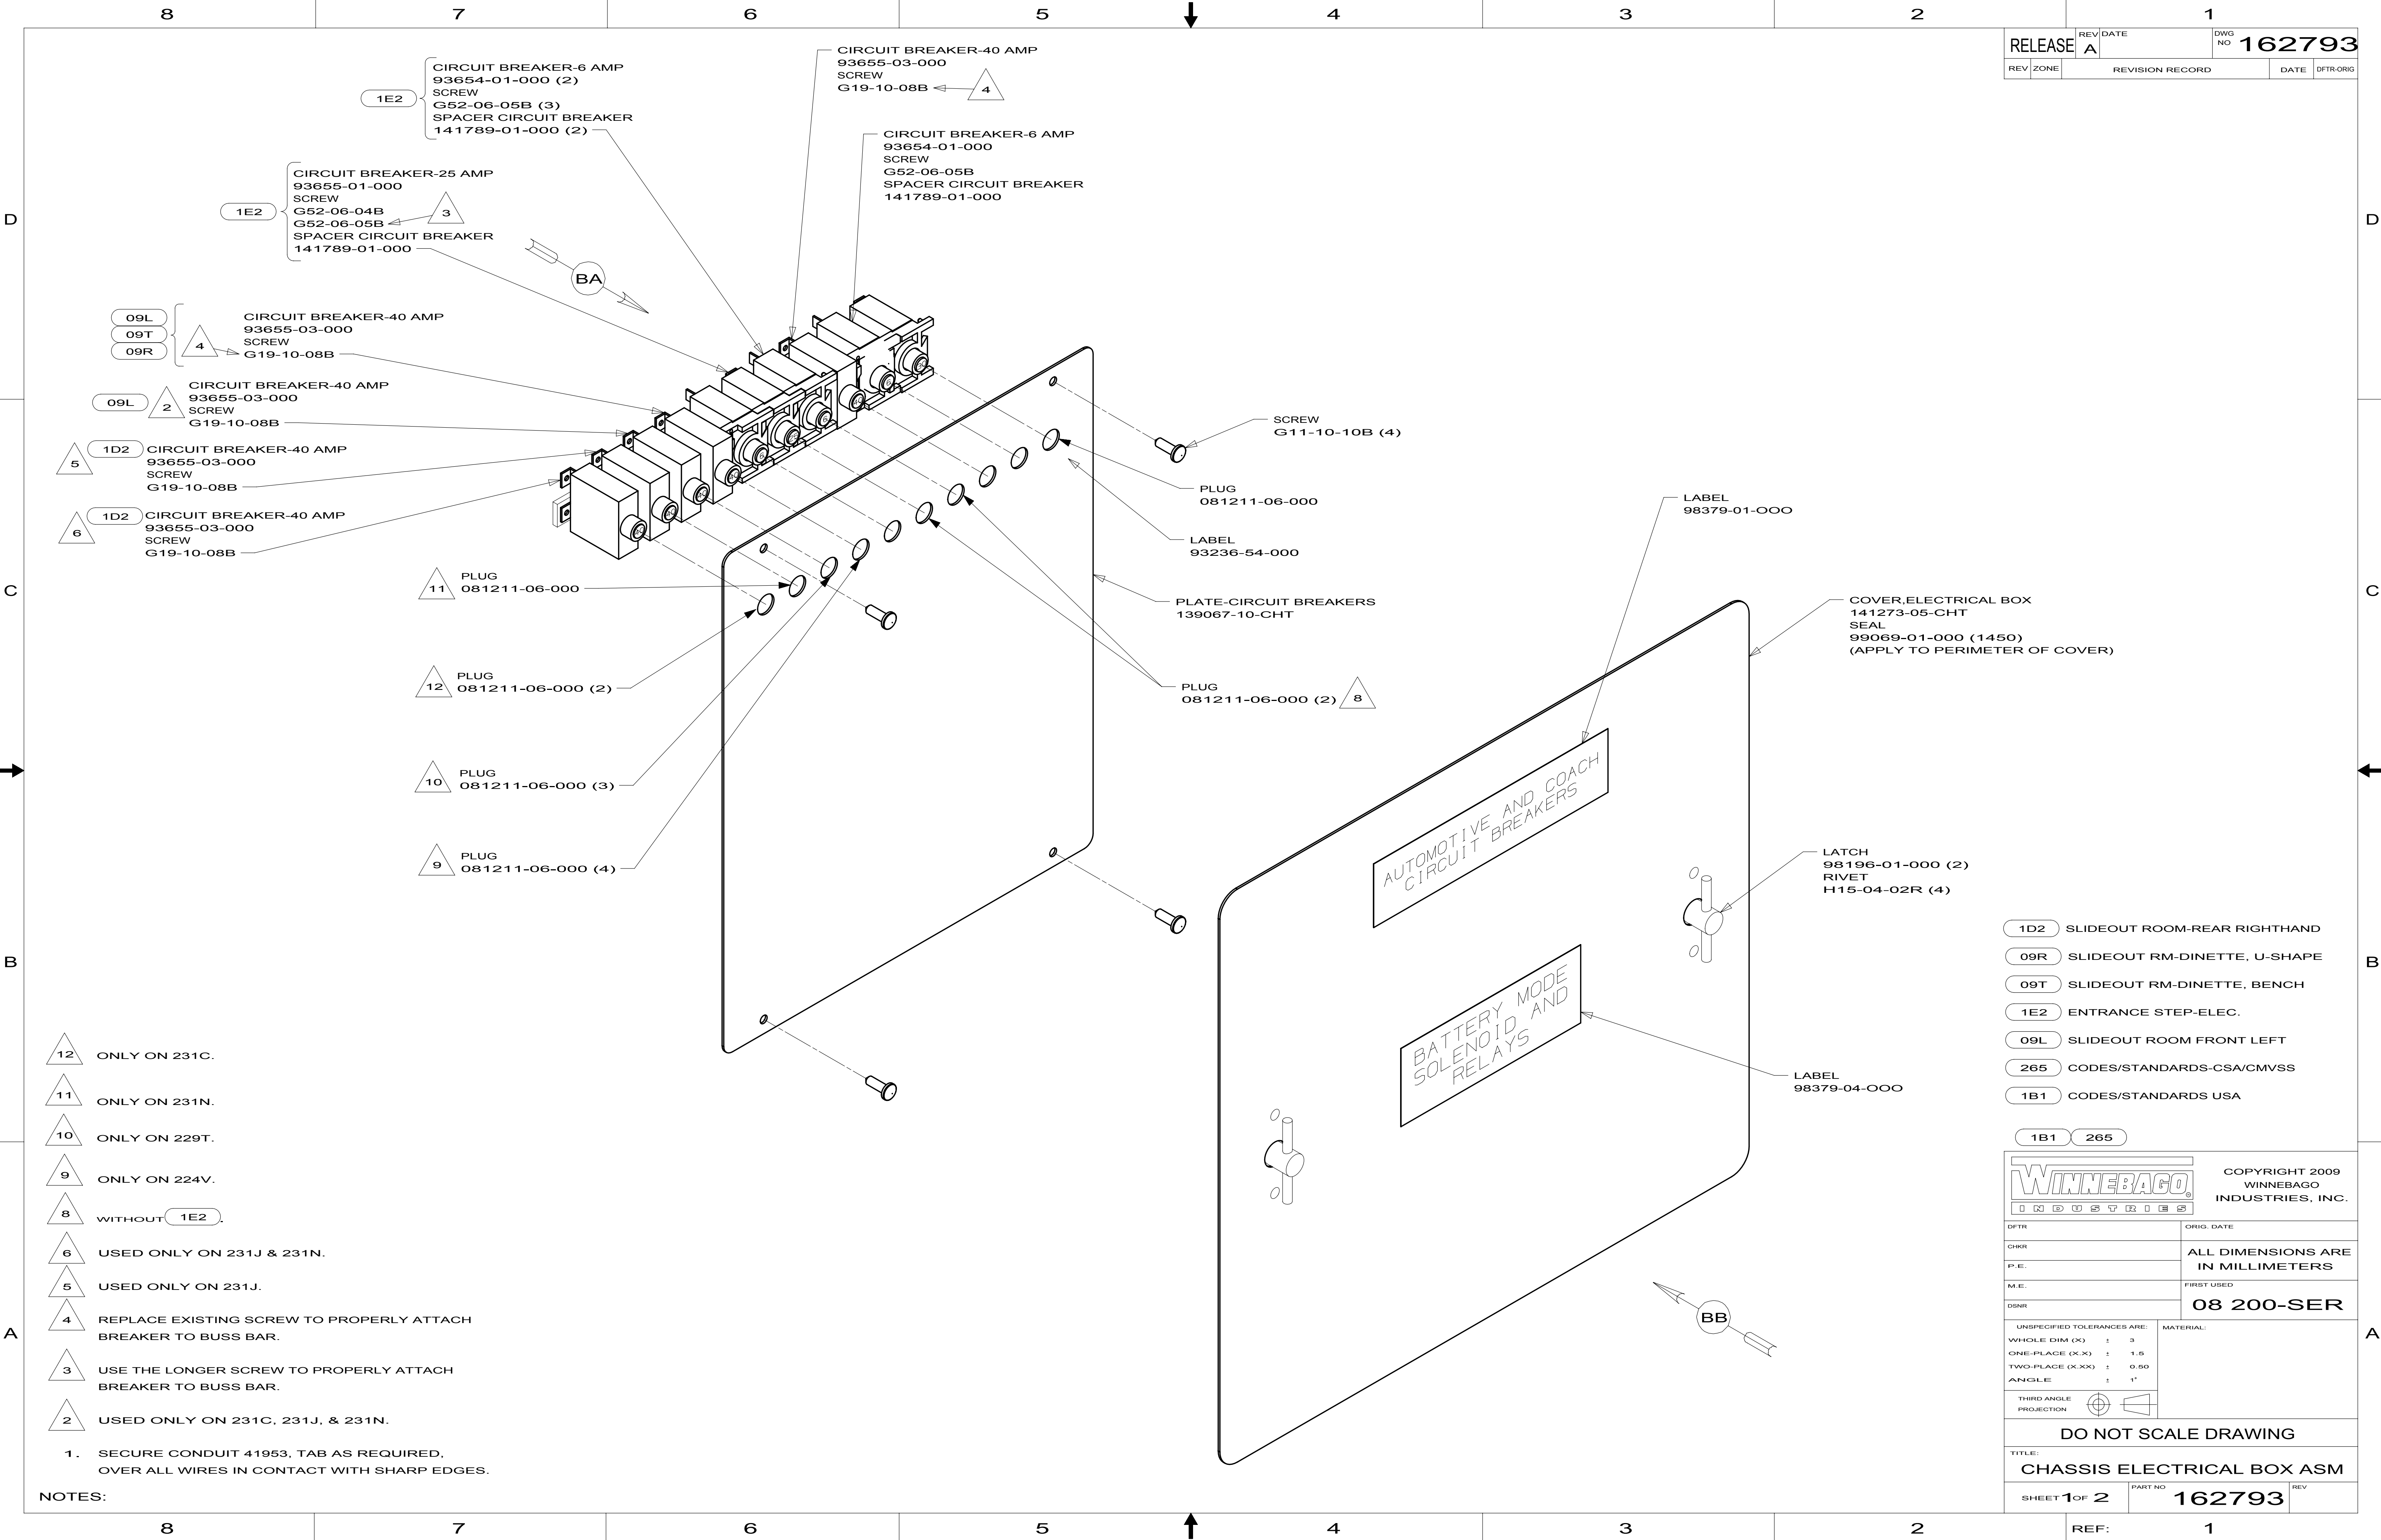

RELEASE		REV	DATE	DWG NO	162793
REV	ZONE	REVISION RECORD		DATE	DFT-ORIG

- 12 ONLY ON 231C.
- 11 ONLY ON 231N.
- 10 ONLY ON 229T.
- 9 ONLY ON 224V.
- 8 WITHOUT 1E2.
- 6 USED ONLY ON 231J & 231N.
- 5 USED ONLY ON 231J.
- 4 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
- 3 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
- 2 USED ONLY ON 231C, 231J, & 231N.



NOTES:

1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

- 1D2 SLIDEOUT ROOM-REAR RIGHTHAND
- 09R SLIDEOUT RM-DINETTE, U-SHAPE
- 09T SLIDEOUT RM-DINETTE, BENCH
- 1E2 ENTRANCE STEP-ELEC.
- 09L SLIDEOUT ROOM FRONT LEFT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265	
WINNEBAGO INDUSTRIES	
COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT-ORIG	ORIG. DATE
CHGR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	08 200-SER
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	

DO NOT SCALE DRAWING	
TITLE: CHASSIS ELECTRICAL BOX ASM	
SHEET 1 OF 2	PART NO 162793
REF:	1

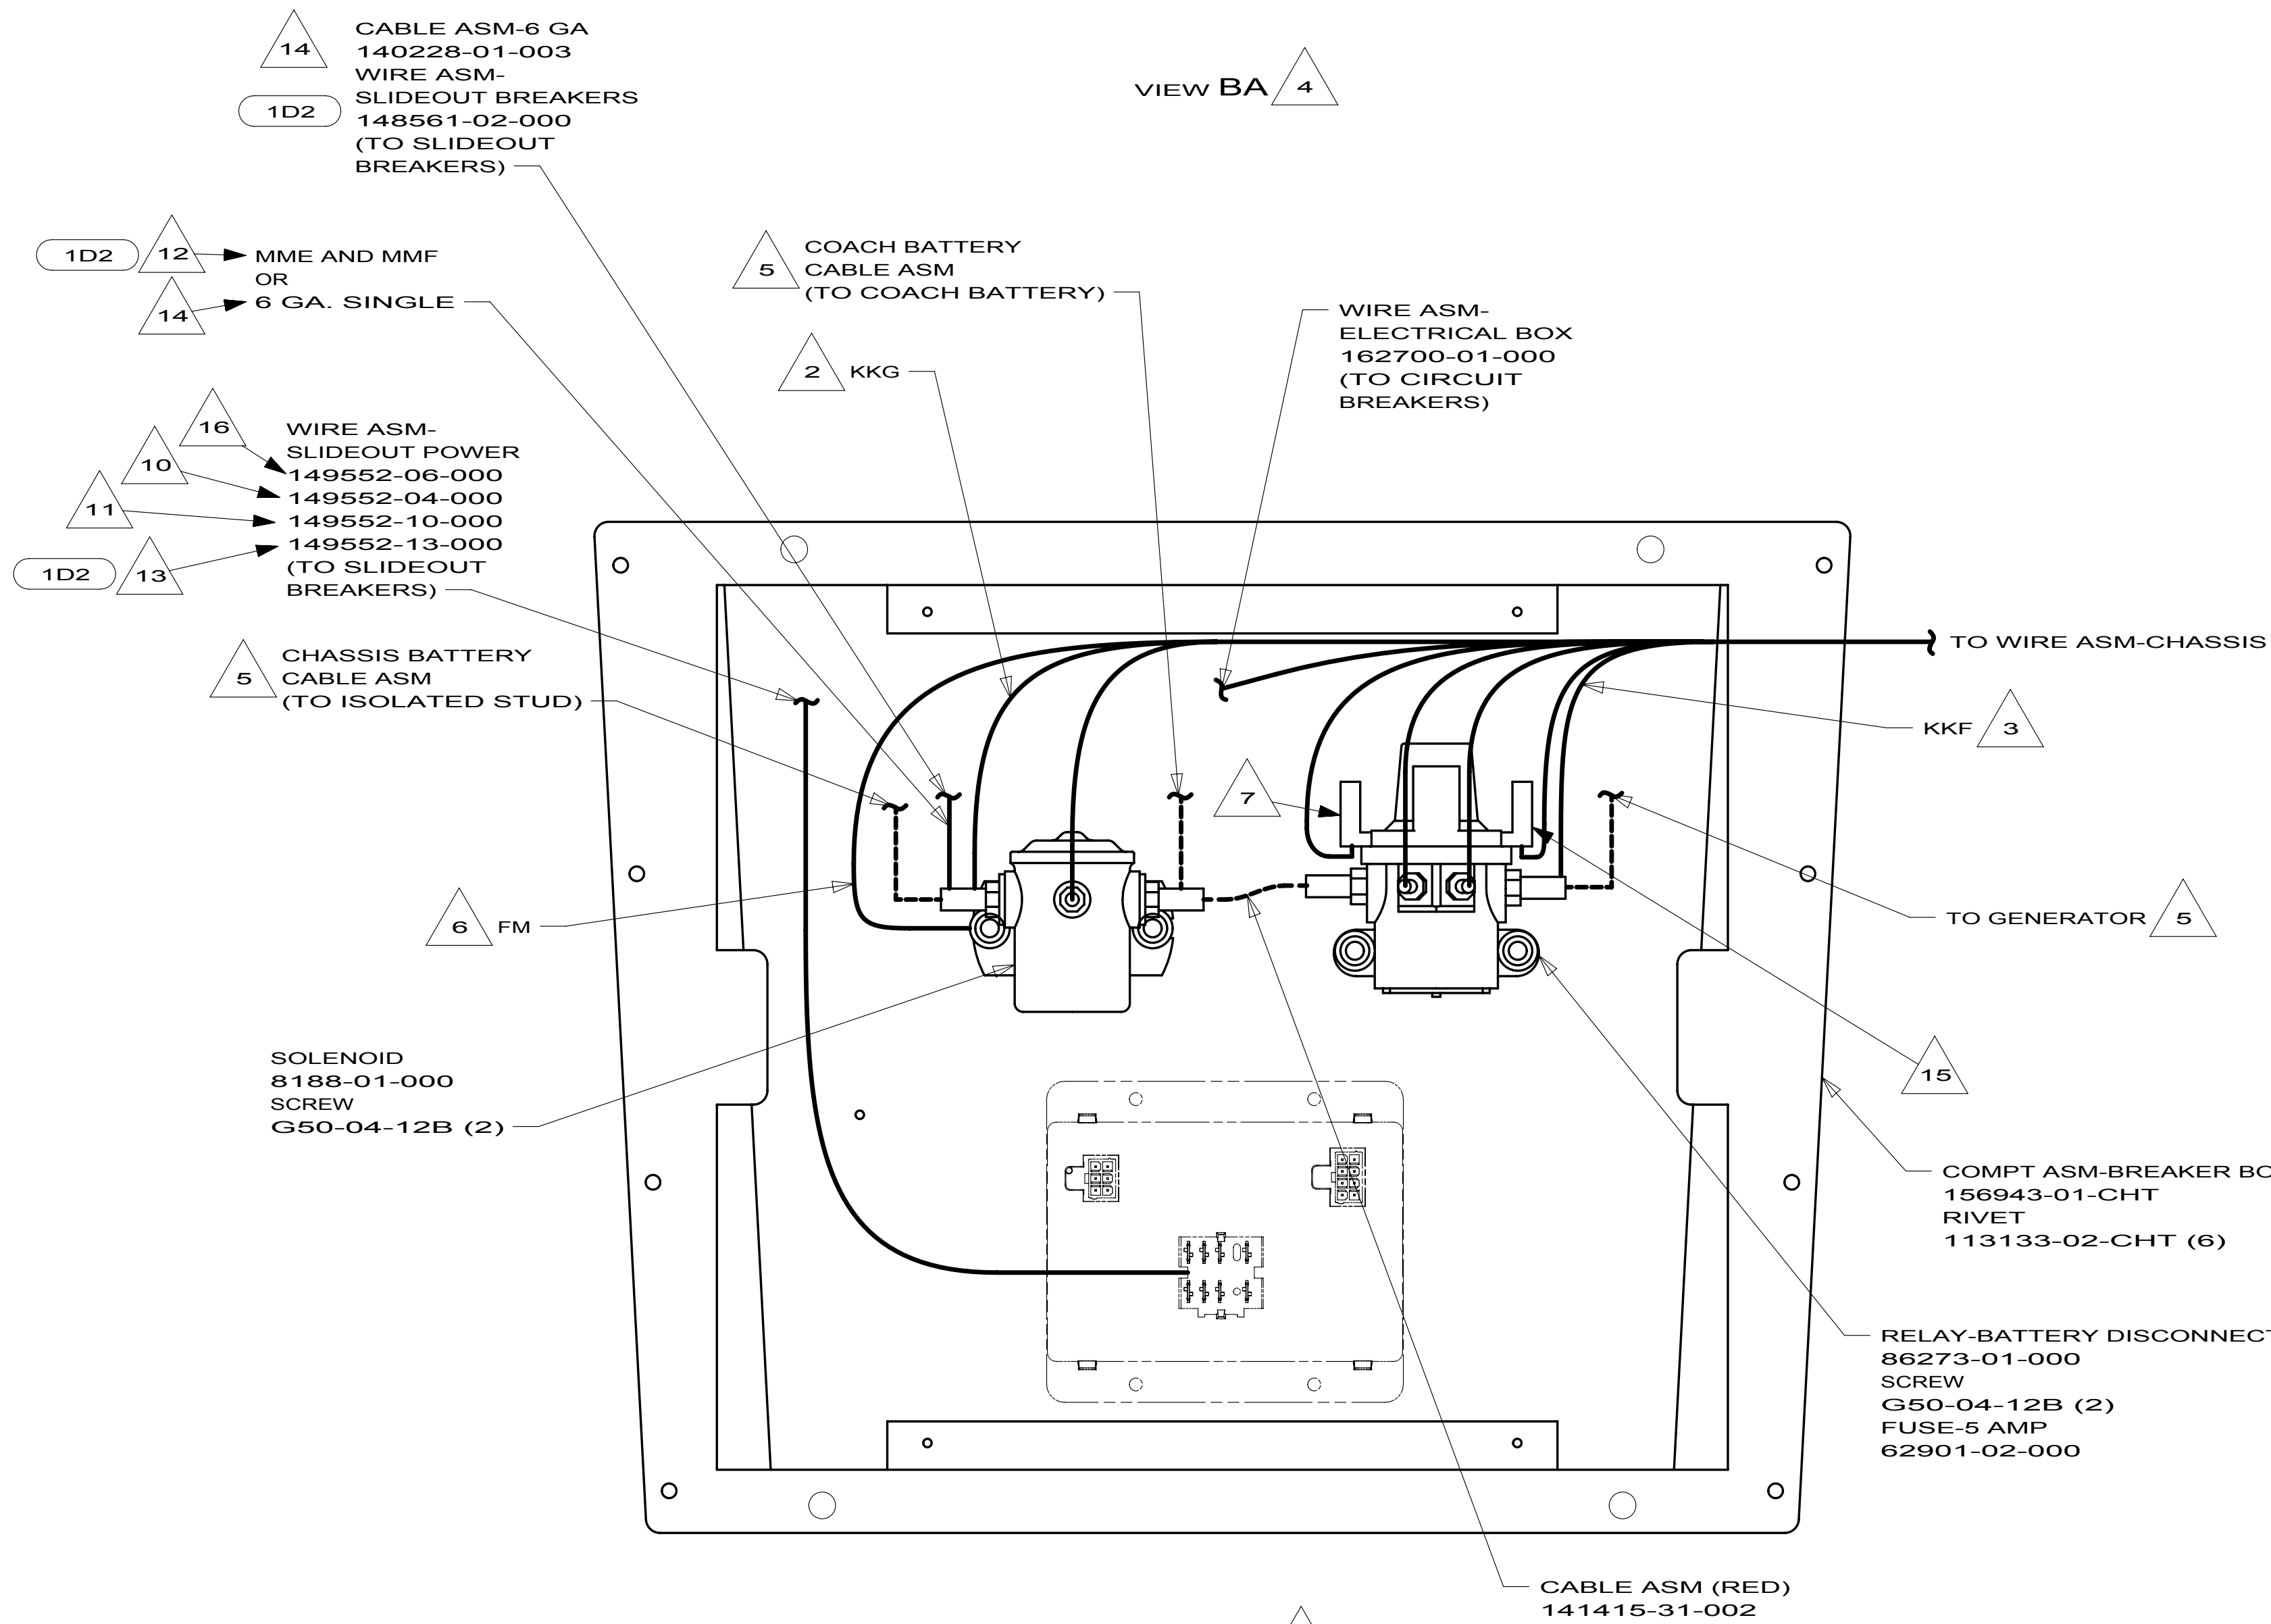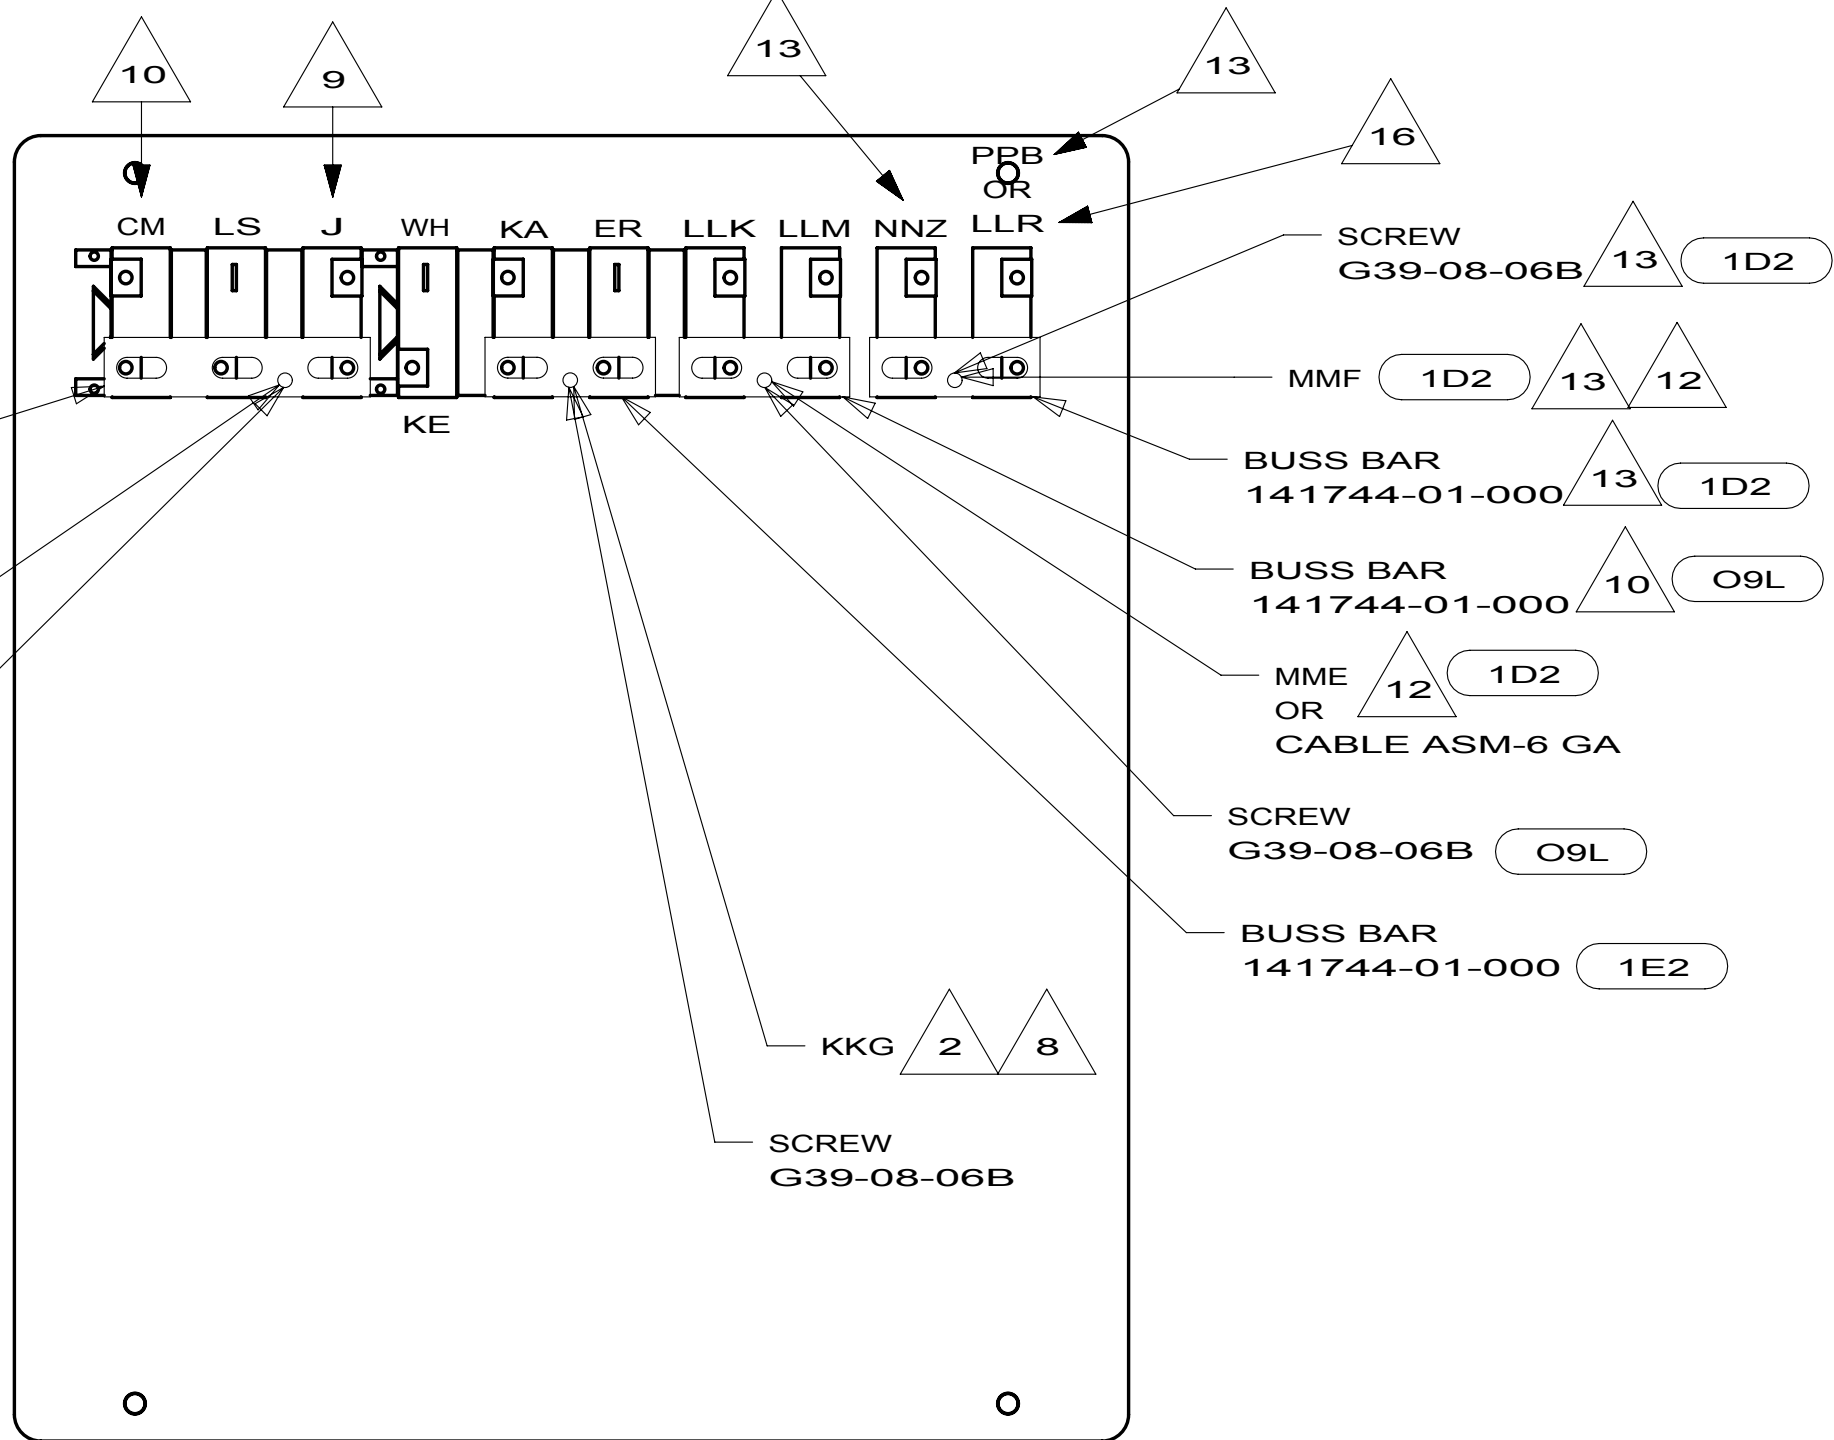

- 16 USED ONLY WITH 231N.
- 15 INSERT TERMINAL FROM CIRCUIT LK INTO FUSEHOLDER SOCKET ON RELAY.
- 14 NOT USED WITH 1D2.
- 13 USED ONLY ON 231J.
- 12 WIRE MARKED WITH RED TAPE.
- 11 USED ONLY ON 229T.
- 10 USED ONLY ON 231C SPECIAL ORDER RENTAL.
- 9 CIRCUIT IS FROM WIRE ASM-CHASSIS.
- 8 IF BUSS BAR IS NOT REQUIRED CONNECT KKG DIRECTLY TO BREAKER.
- 7 INSERT TERMINAL FROM CIRCUIT LJ INTO FUSE HOLDER SOCKET ON RELAY.
- 6 SECURE WITH SOLENOID MOUNTING SCREW.
- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 TAPE BACK UNUSED WIRES TO HARNESS.
- 3 WIRE IS MARKED WITH YELLOW TAPE.
- 2 WIRE IS MARKED WITH PURPLE TAPE.

1. LEGEND: — WINNEBAGO; - - - CABLE; - - - CHASSIS SUPPLIED WIRING.

- 1D2 SLIDEOUT ROOM-REAR RIGHTHAND
- O9R SLIDEOUT RM-DINETTE, U-SHAPE
- O9T SLIDEOUT RM-DINETTE, BENCH
- 1E2 ENTRANCE STEP-ELEC.
- O9L SLIDEOUT ROOM FRONT LEFT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1		265	
FIRST USED			
08 200-SER			
DO NOT SCALE DRAWING			
TITLE:			
CHASSIS ELECTRICAL BOX ASM			
SHEET 2		PART NO 162793	REV

[illegible]



CABLE ASM-COACH
BATTERY GND
(BLK) 2

CABLE ASM-
COACH BATTERY
(YEL) 2

BATTERY
63739-03-000
TIE DOWN
160014-03-CHT
BOLT
51387-06-000 (2)
NUT
D39-05-00B (2)
CLIP
44364-02-000 (2)

BATTERY BOX

VIEW BA

BOLT
C26-05-16B
NUT
D39-05-00B
TO GROUND BAR

12X BATTERY-ONE

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 12X

FIRST USED 09 200/300/700 SER

DO NOT SCALE DRAWING

TITLE: BATTERY INSTL

SHEET 2 PART NO 165490 REV

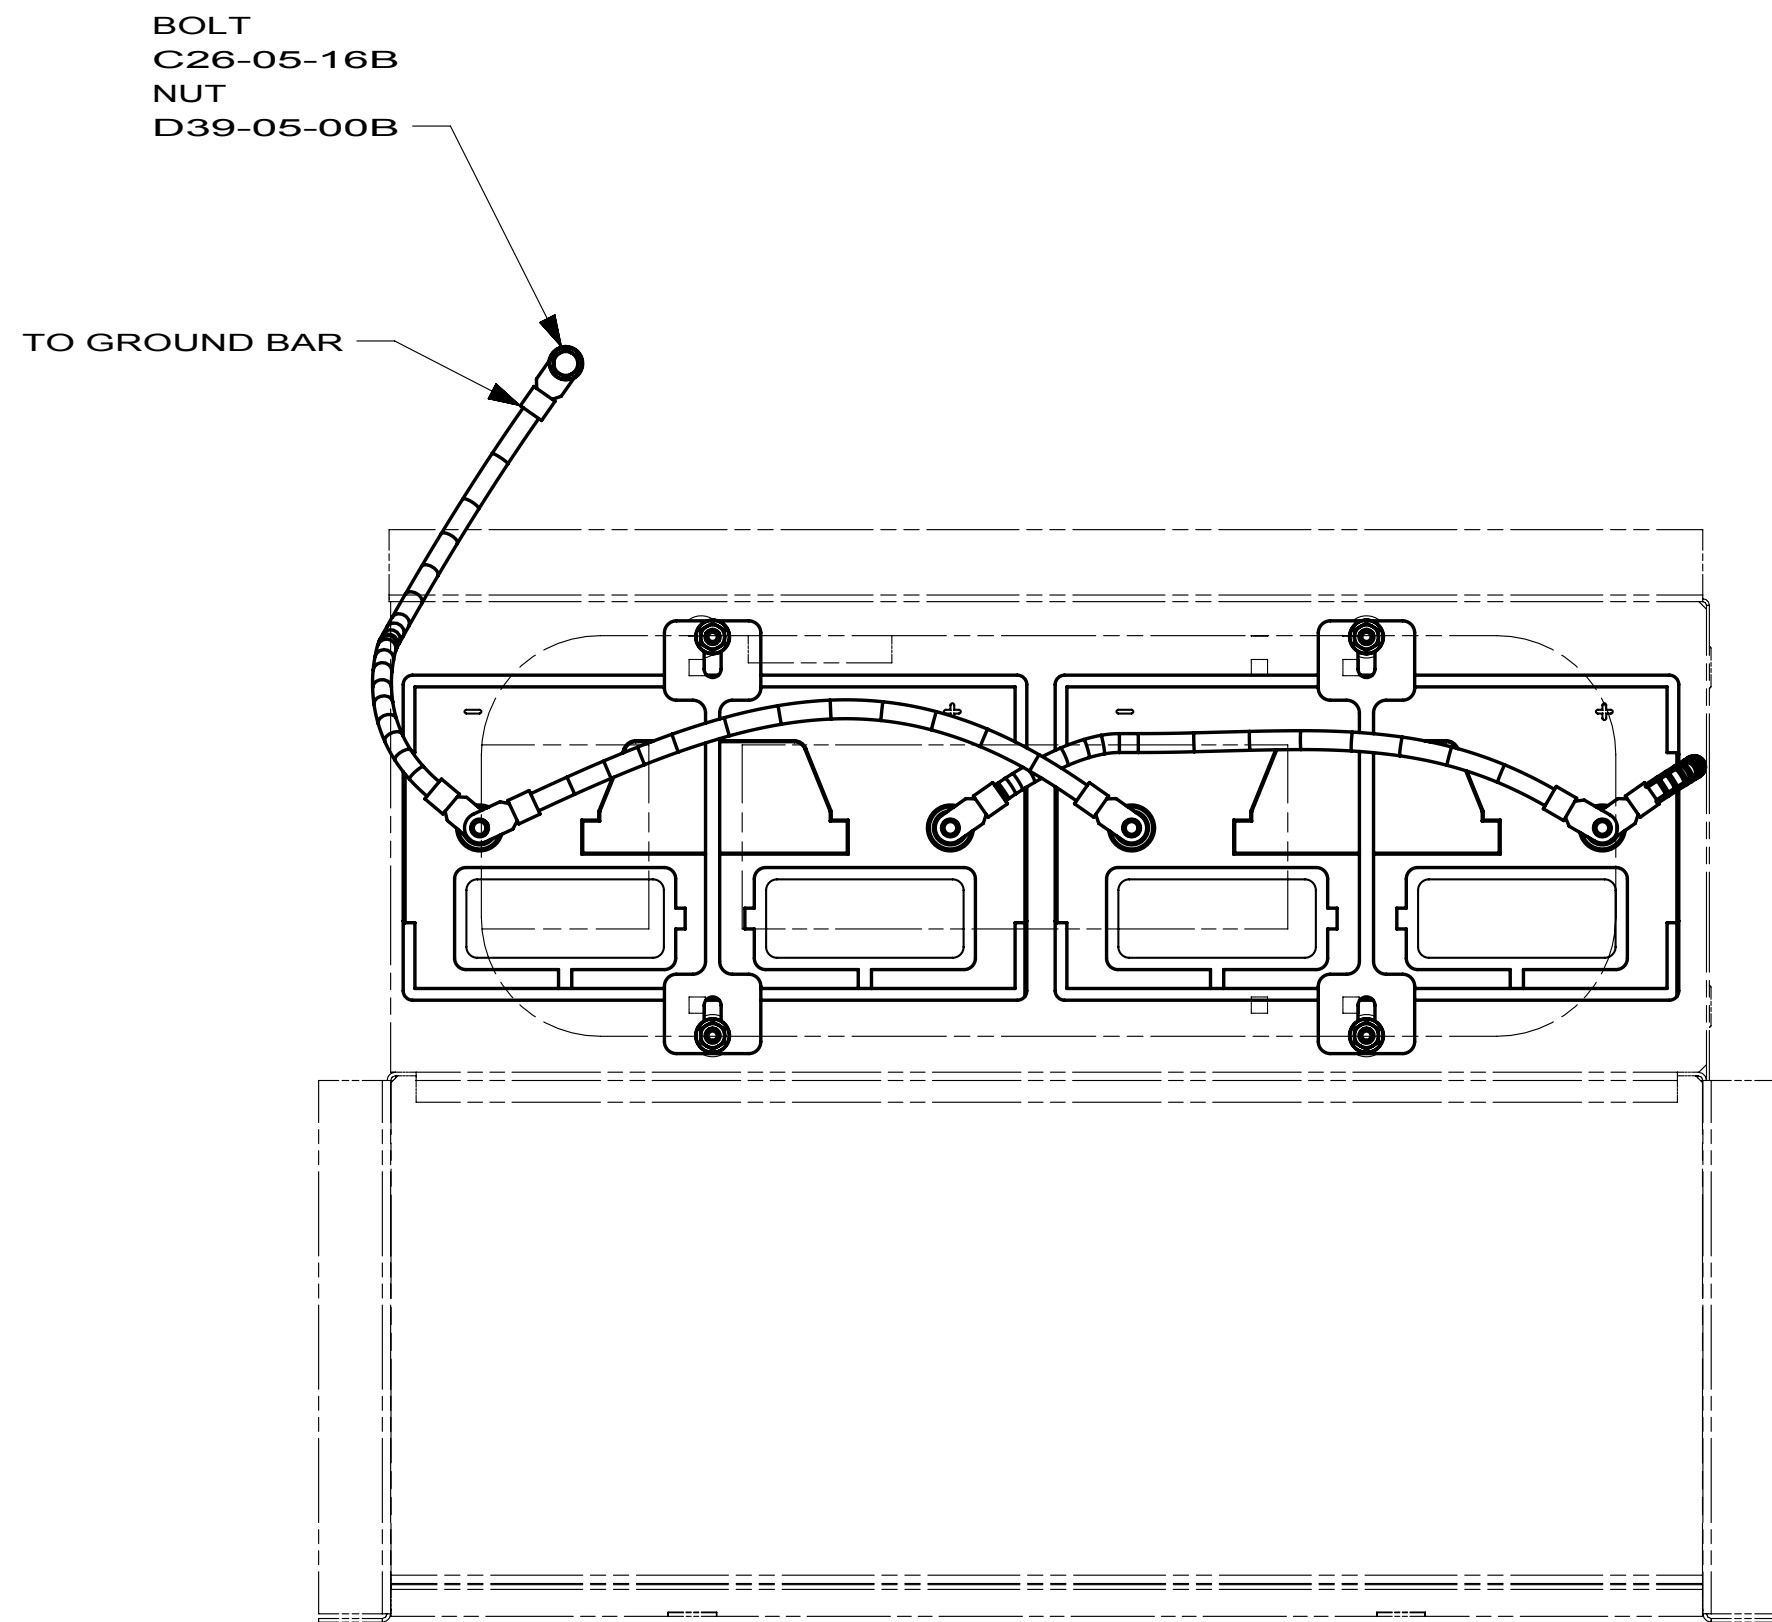

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


2 BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:



VIEW CA  

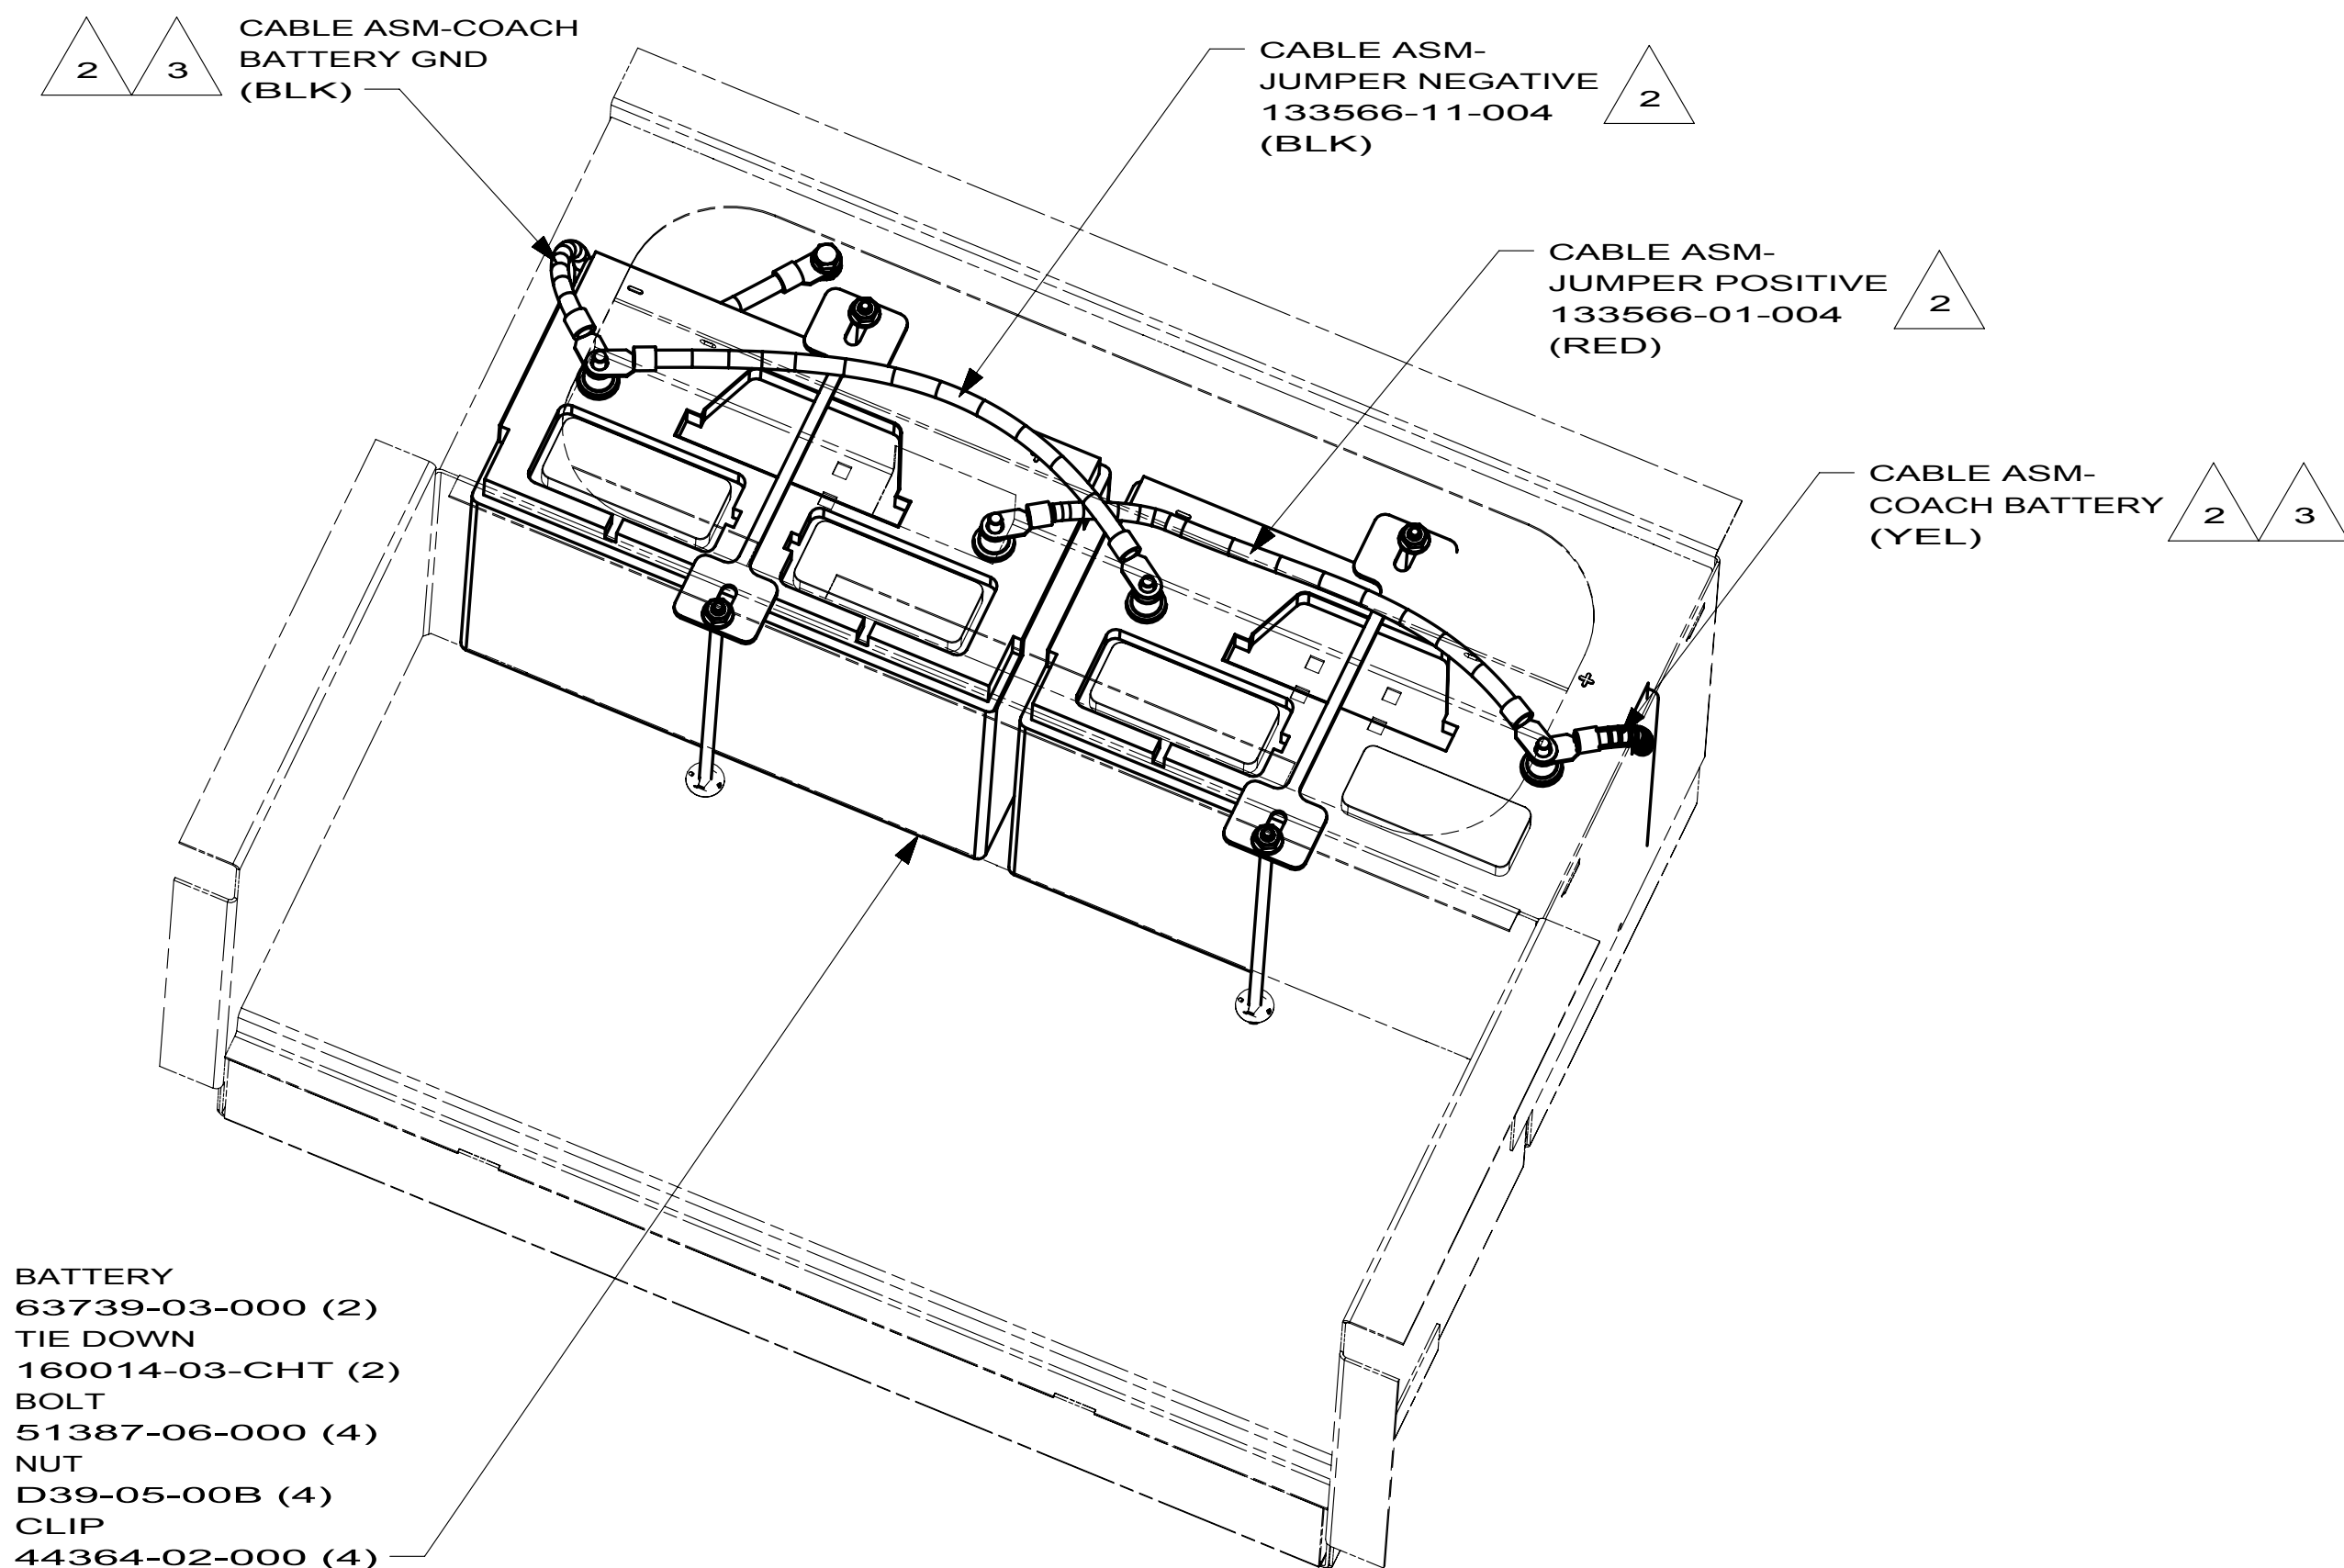

BATTERY BOX

-  THE POSITIVE AND NEGATIVE BATTERY CABLES ARE TO BE TERMINATED ON OPPOSITE BATTERIES.
-  BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

NOTES:

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

22W BATTERY-SECOND

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 22W


FIRST USED
09 200/300/700 SER


DO NOT SCALE DRAWING

TITLE:		
BATTERY INSTL		
SHEET 3	PART NO 165490	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

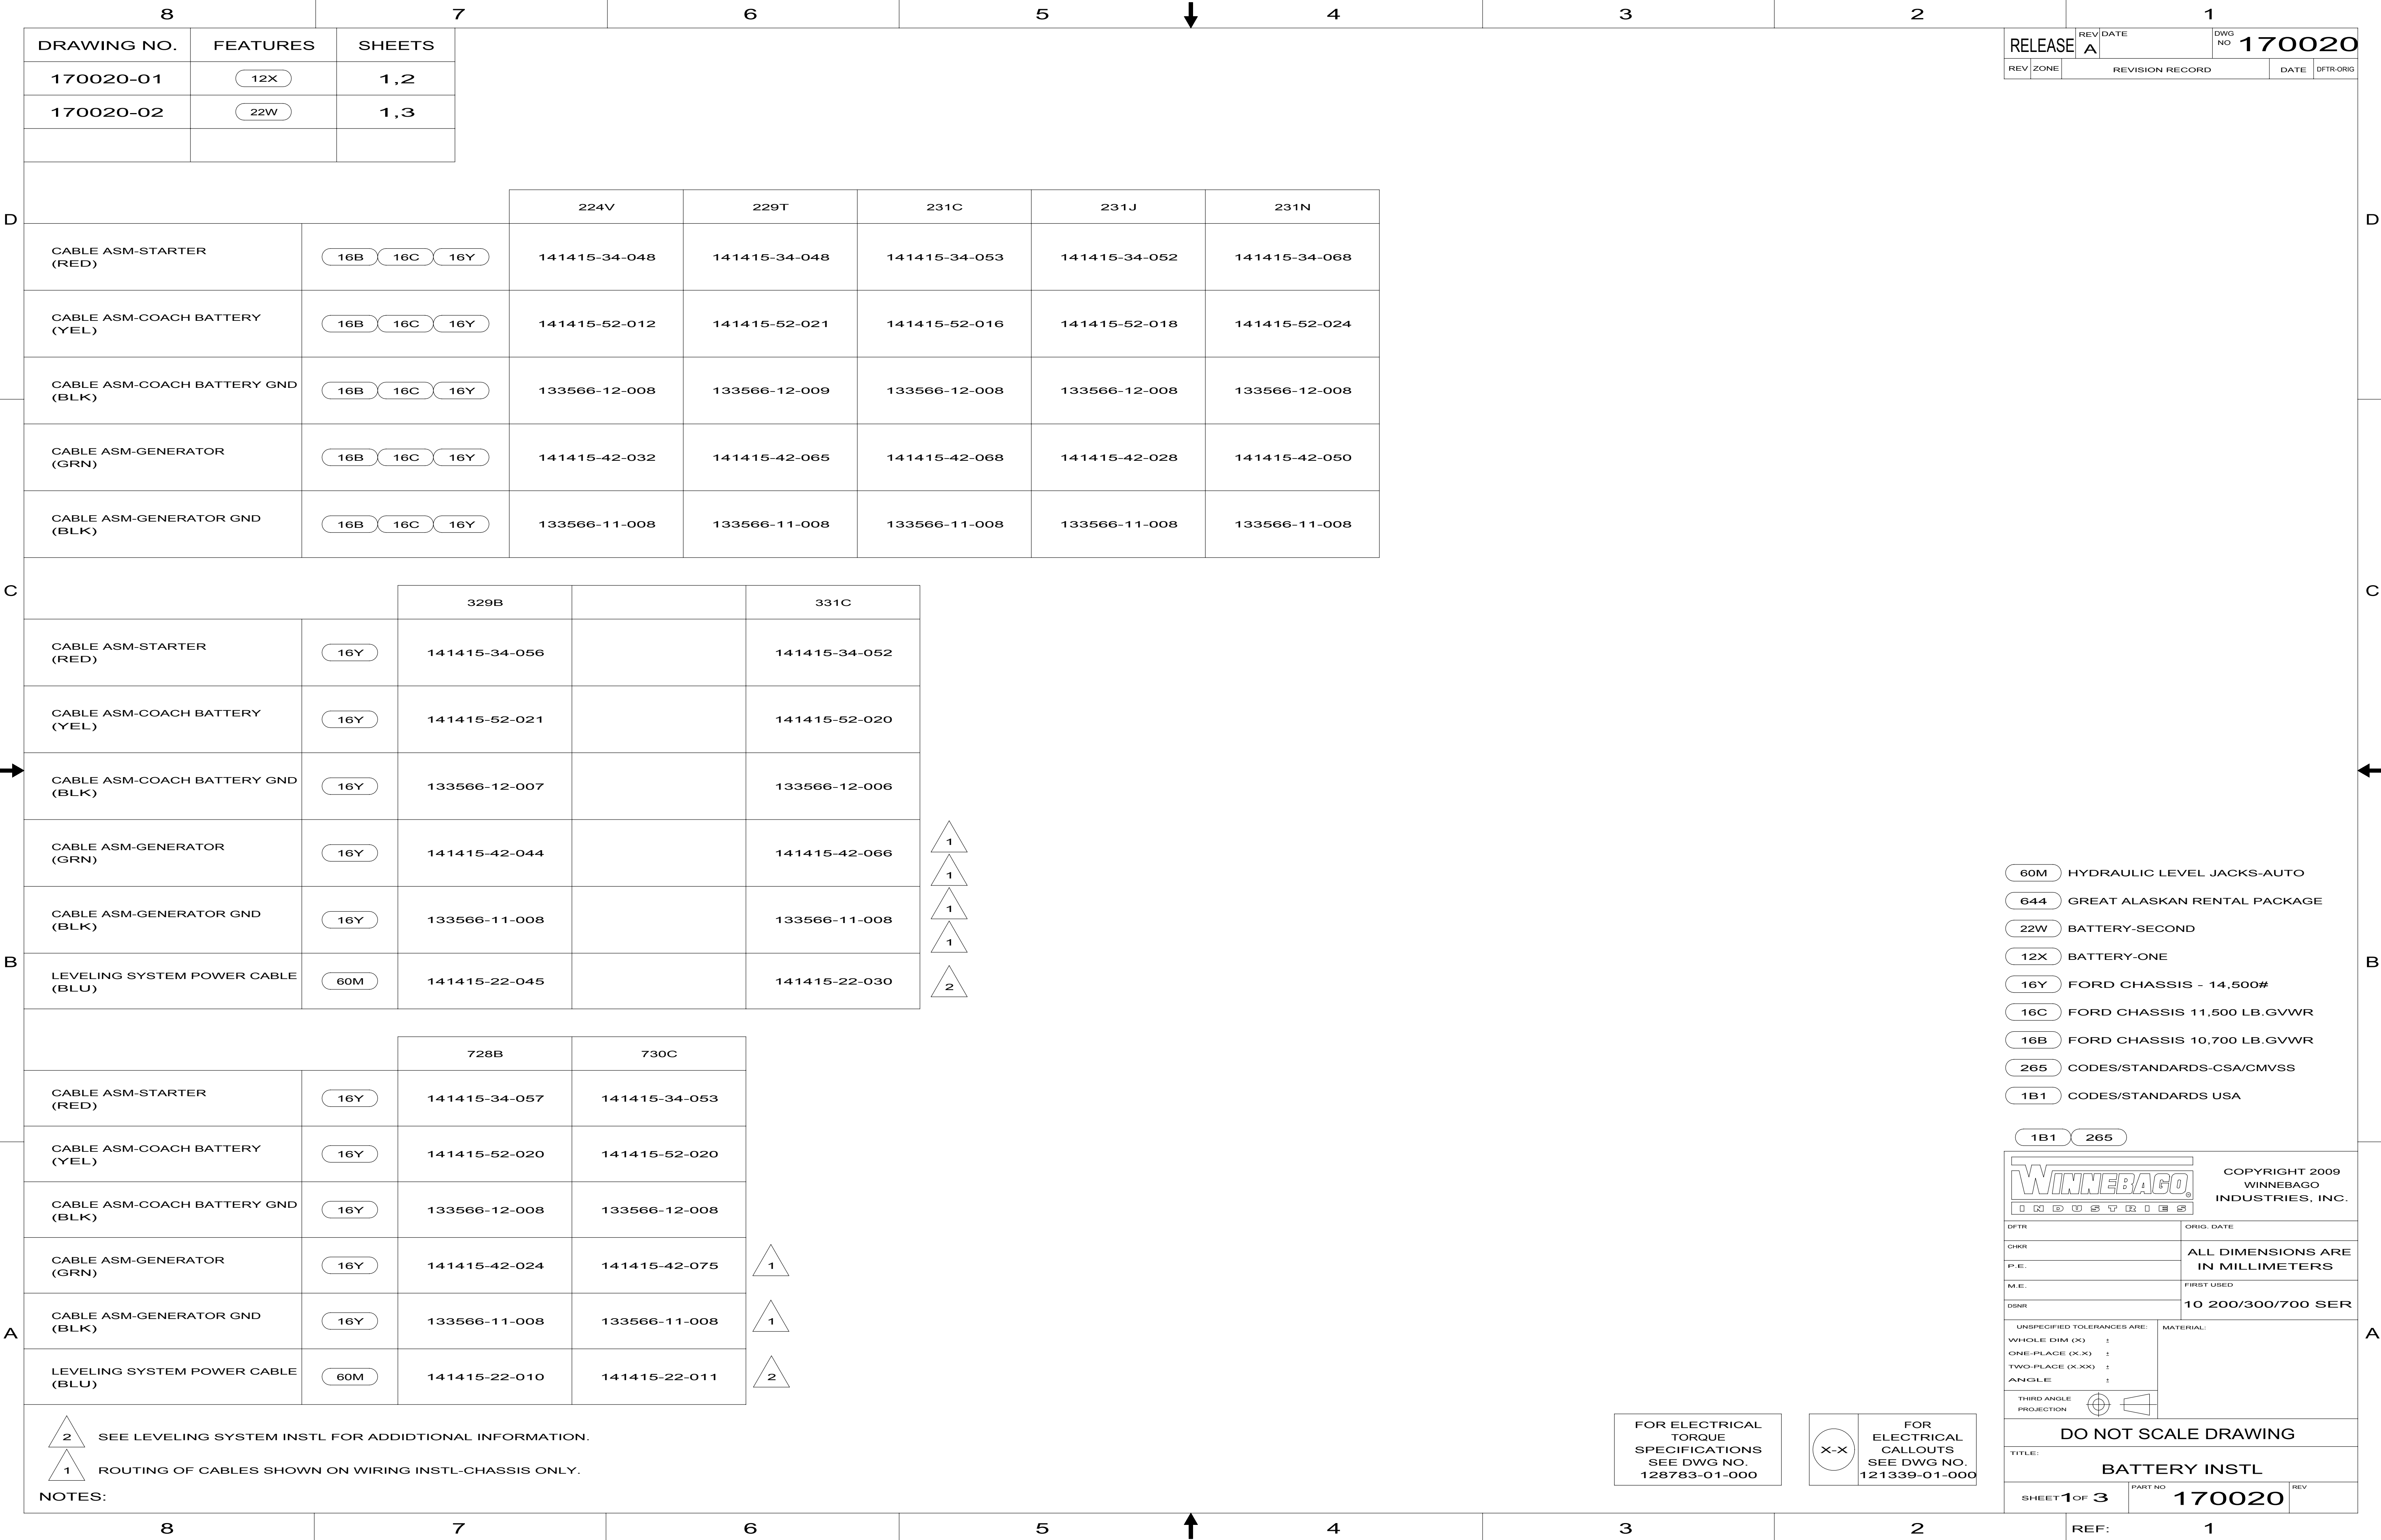FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000







CABLE ASM-COACH
BATTERY GND
(BLK) 2

CABLE ASM-
COACH BATTERY
(YEL) 2

BATTERY
63739-03-000
TIE DOWN
160014-03-CHT
BOLT
51387-06-000 (2)
NUT
D39-05-00B (2)
CLIP
44364-02-000 (2)

BATTERY BOX

VIEW BA

BOLT
C26-05-16B
NUT
D39-05-00B
TO GROUND BAR

2 BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

12X BATTERY-ONE

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

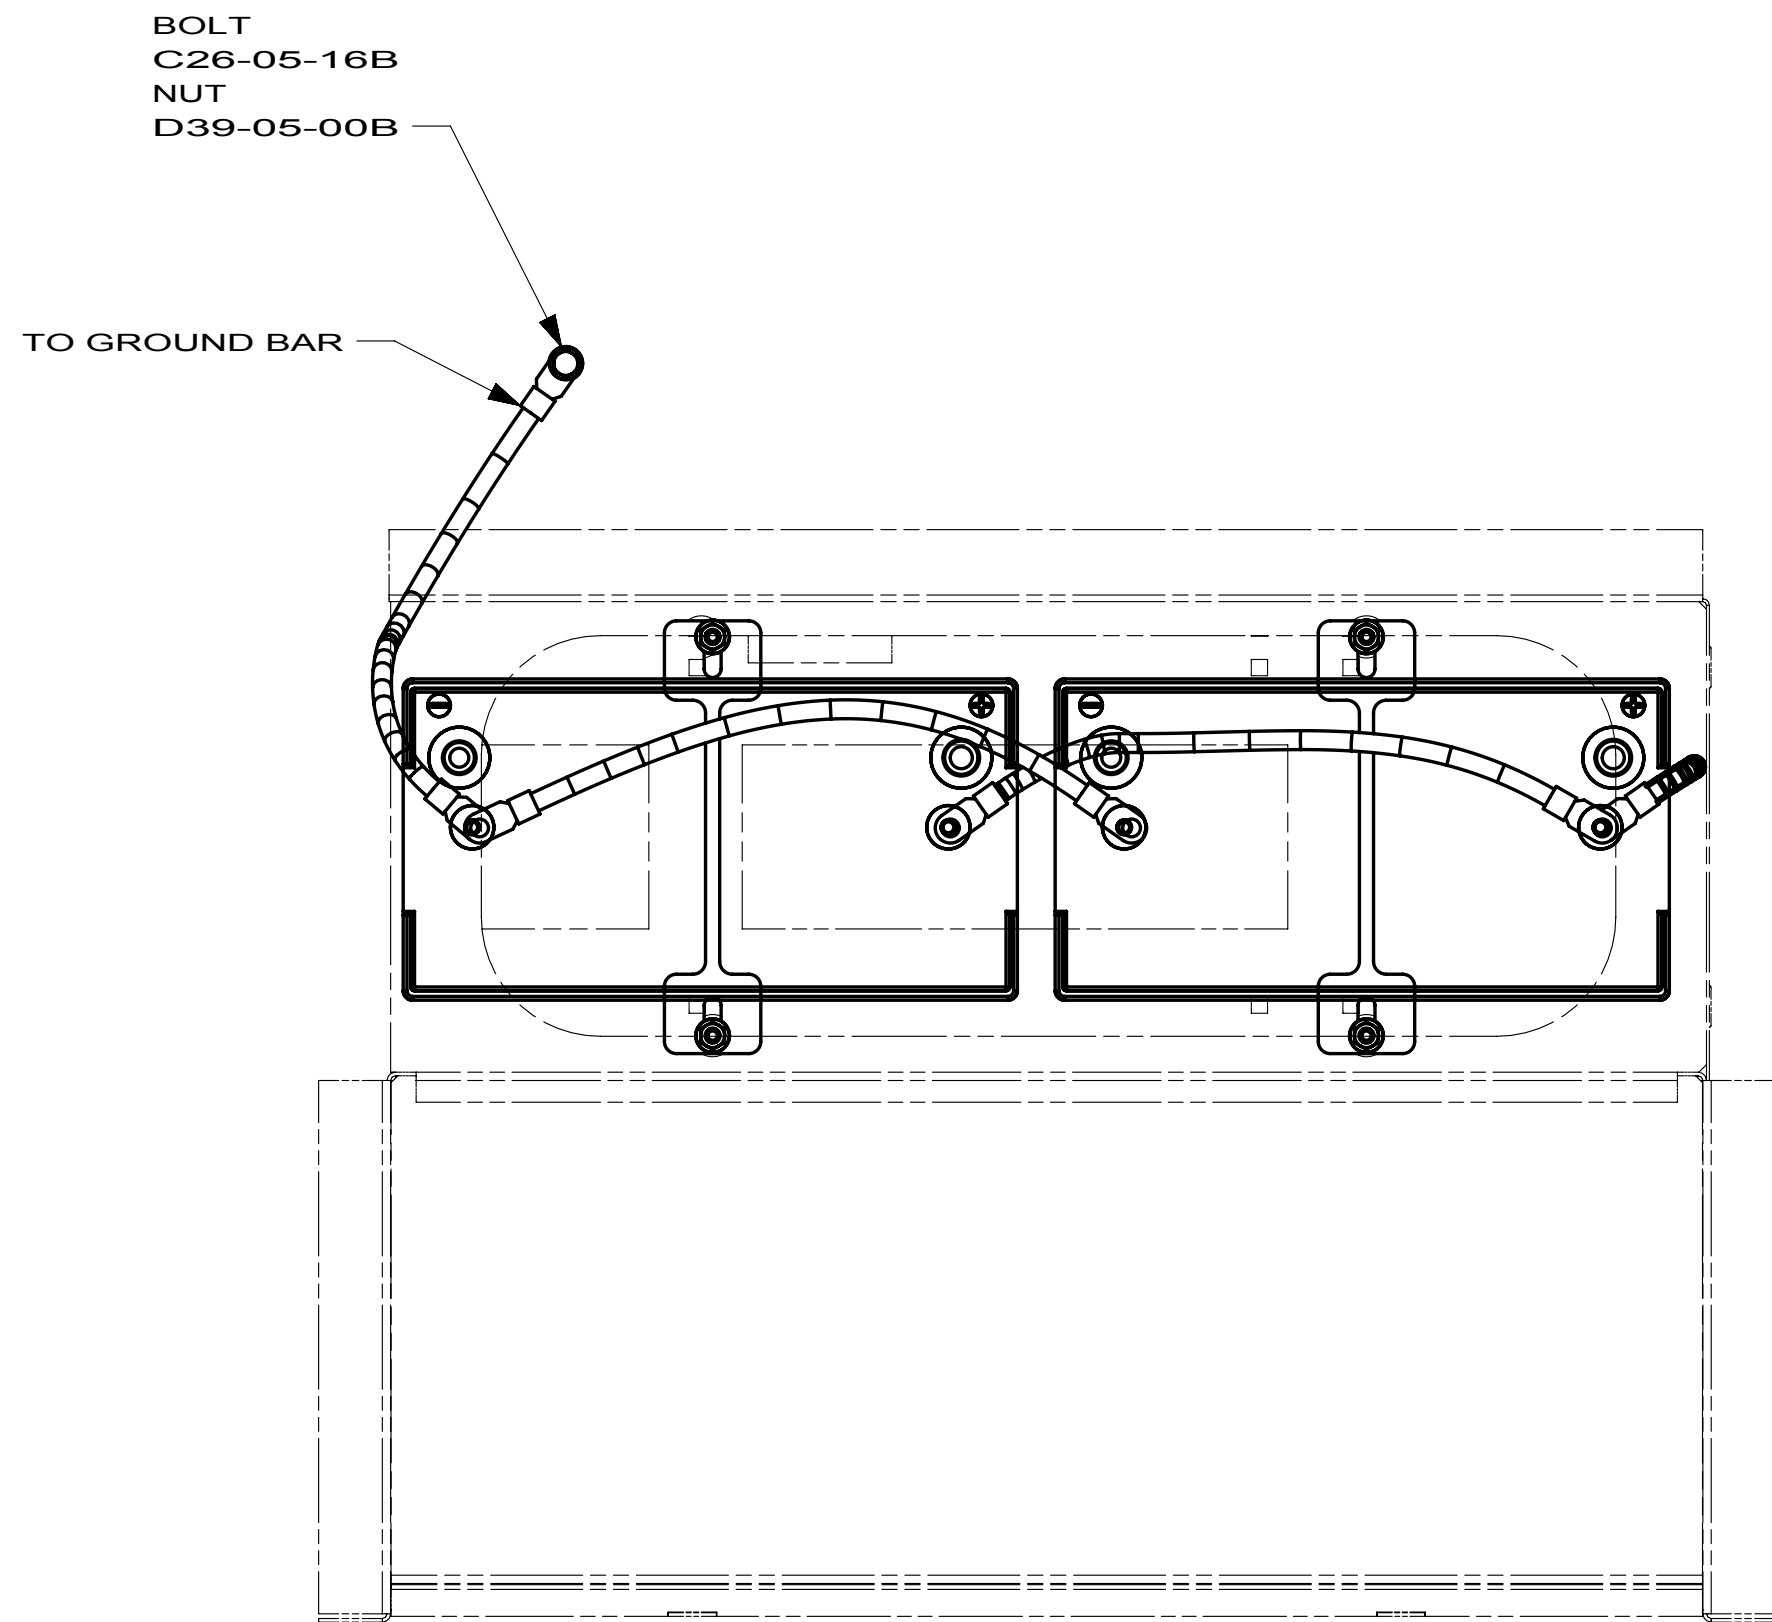

1B1 265 12X

FIRST USED
10 200/300/700 SER


DO NOT SCALE DRAWING

TITLE:
BATTERY INSTL

SHEET 2 PART NO 170020 REV



VIEW CA

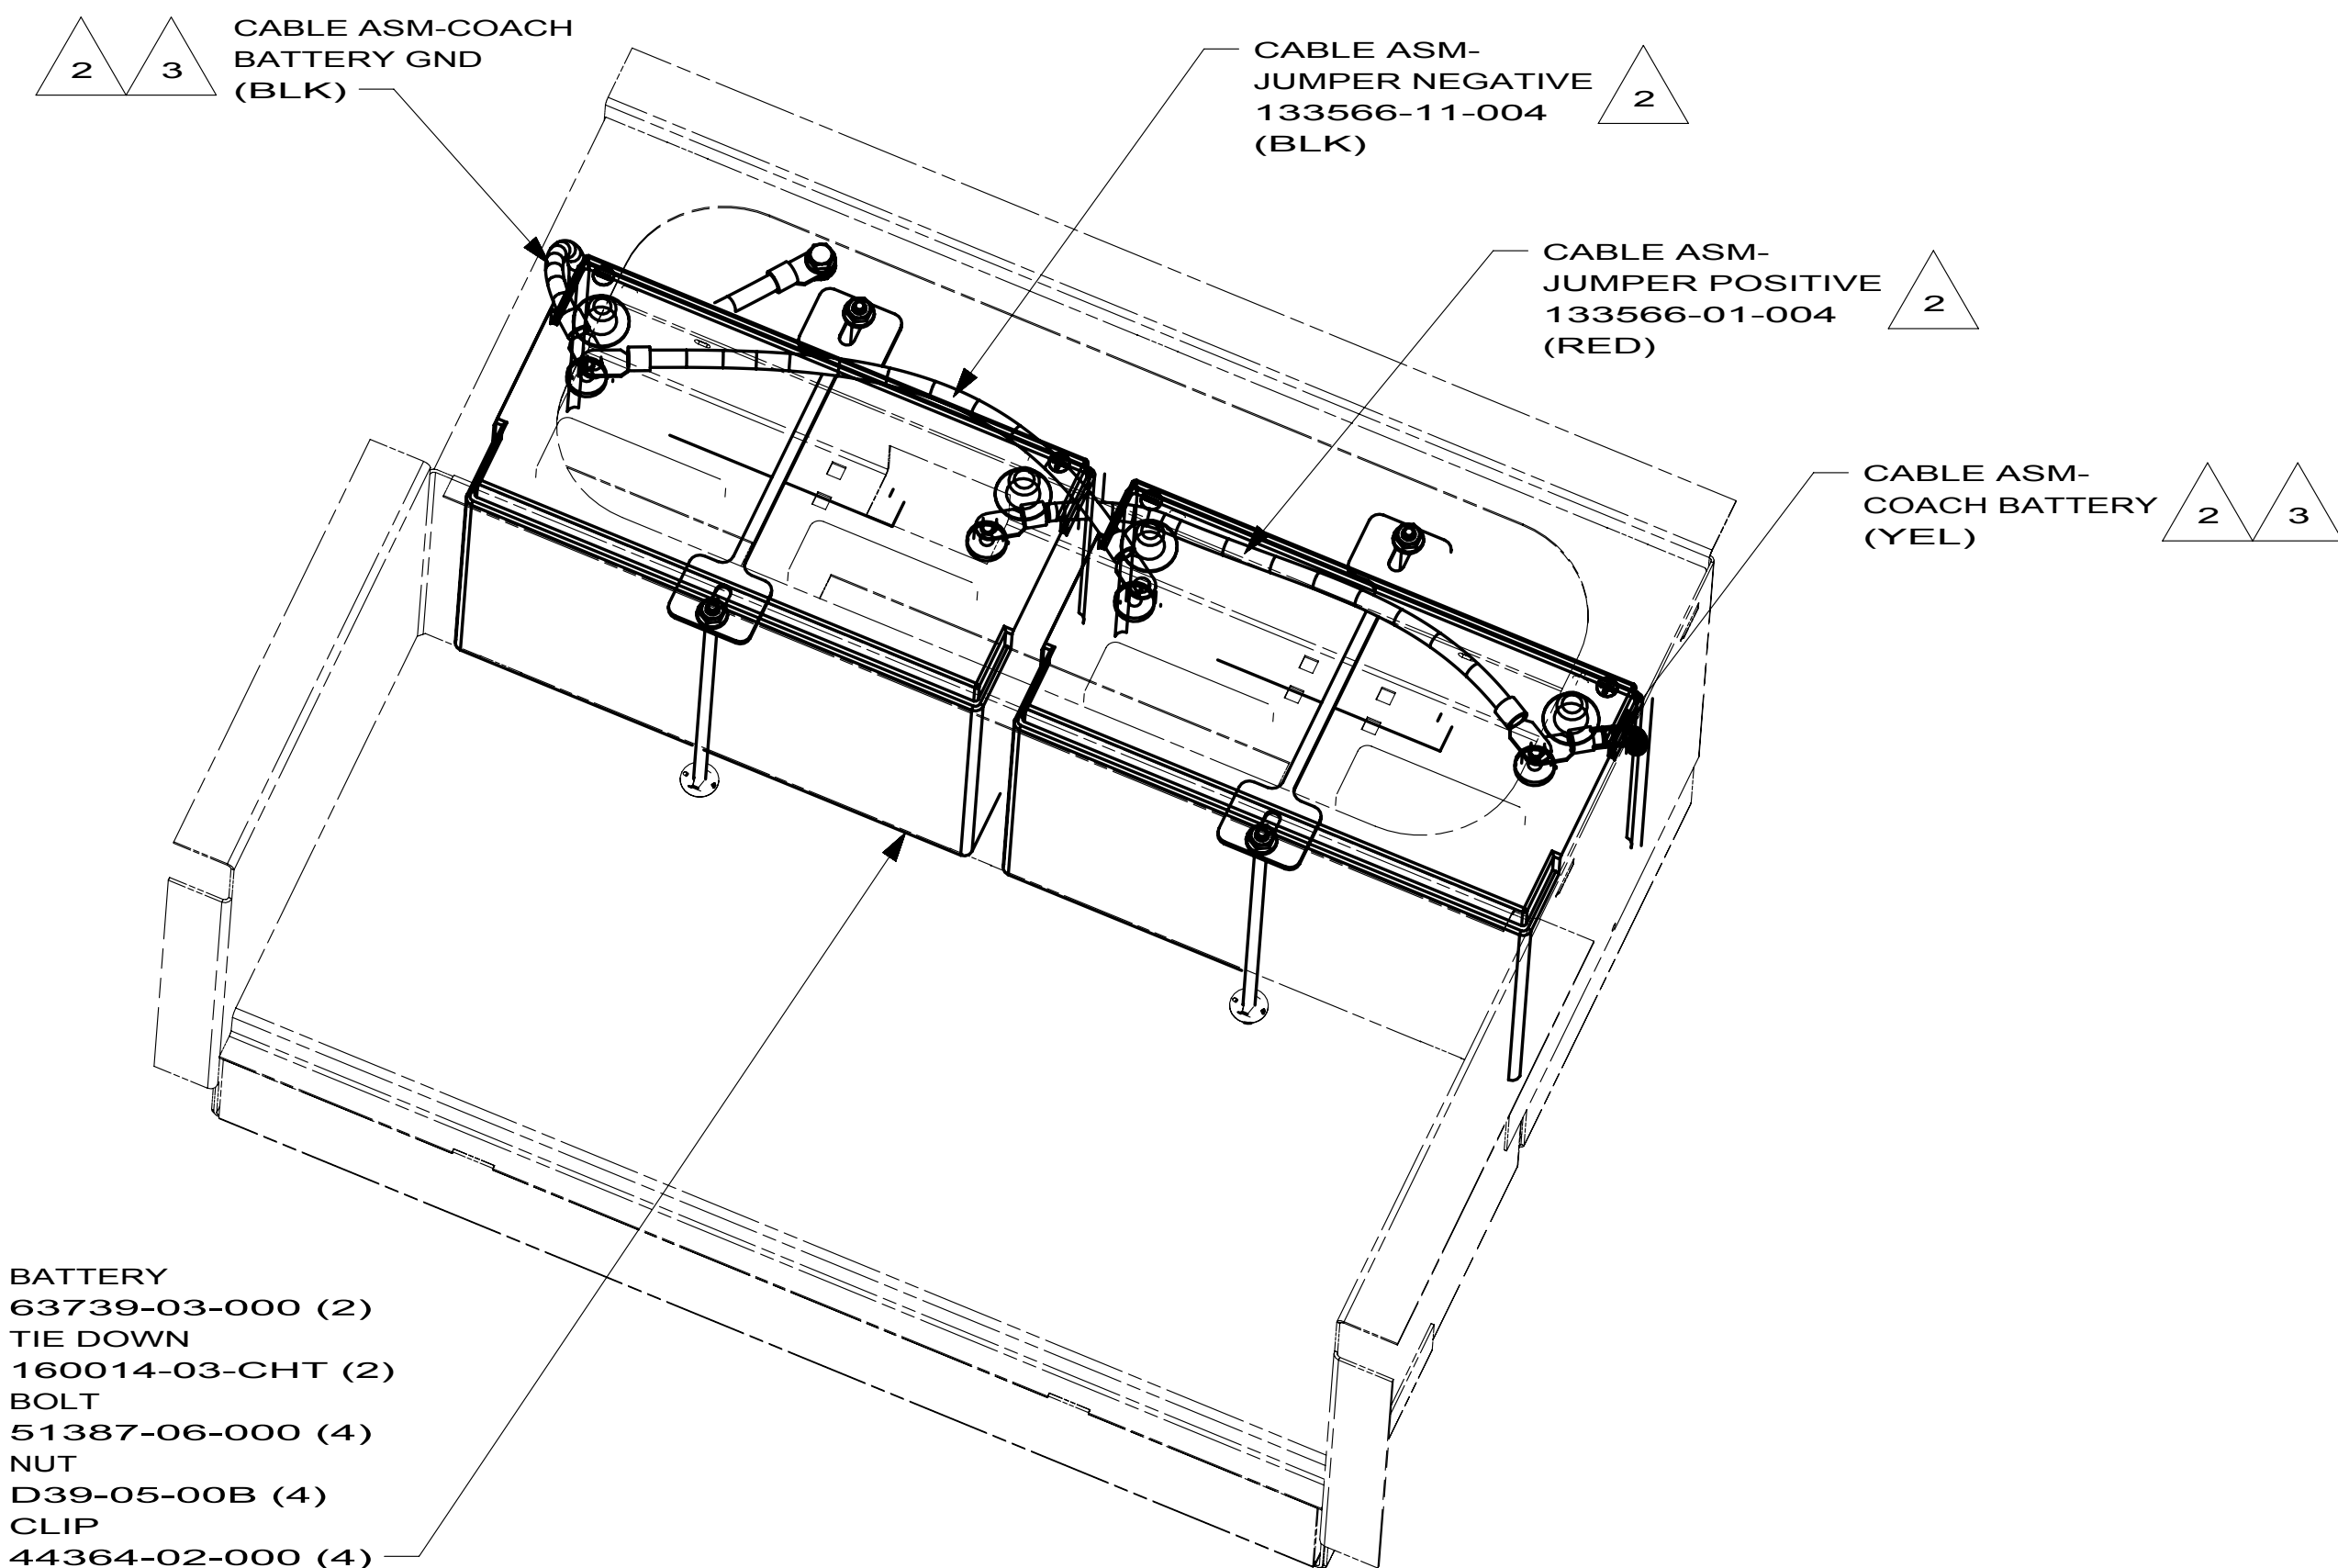

BATTERY BOX

- 3 THE POSITIVE AND NEGATIVE BATTERY CABLES ARE TO BE TERMINATED ON OPPOSITE BATTERIES.
- 2 BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

22W BATTERY-SECOND

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA

1B1 265 22W


FIRST USED		
10 200/300/700 SER		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 3	PART NO 170020	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

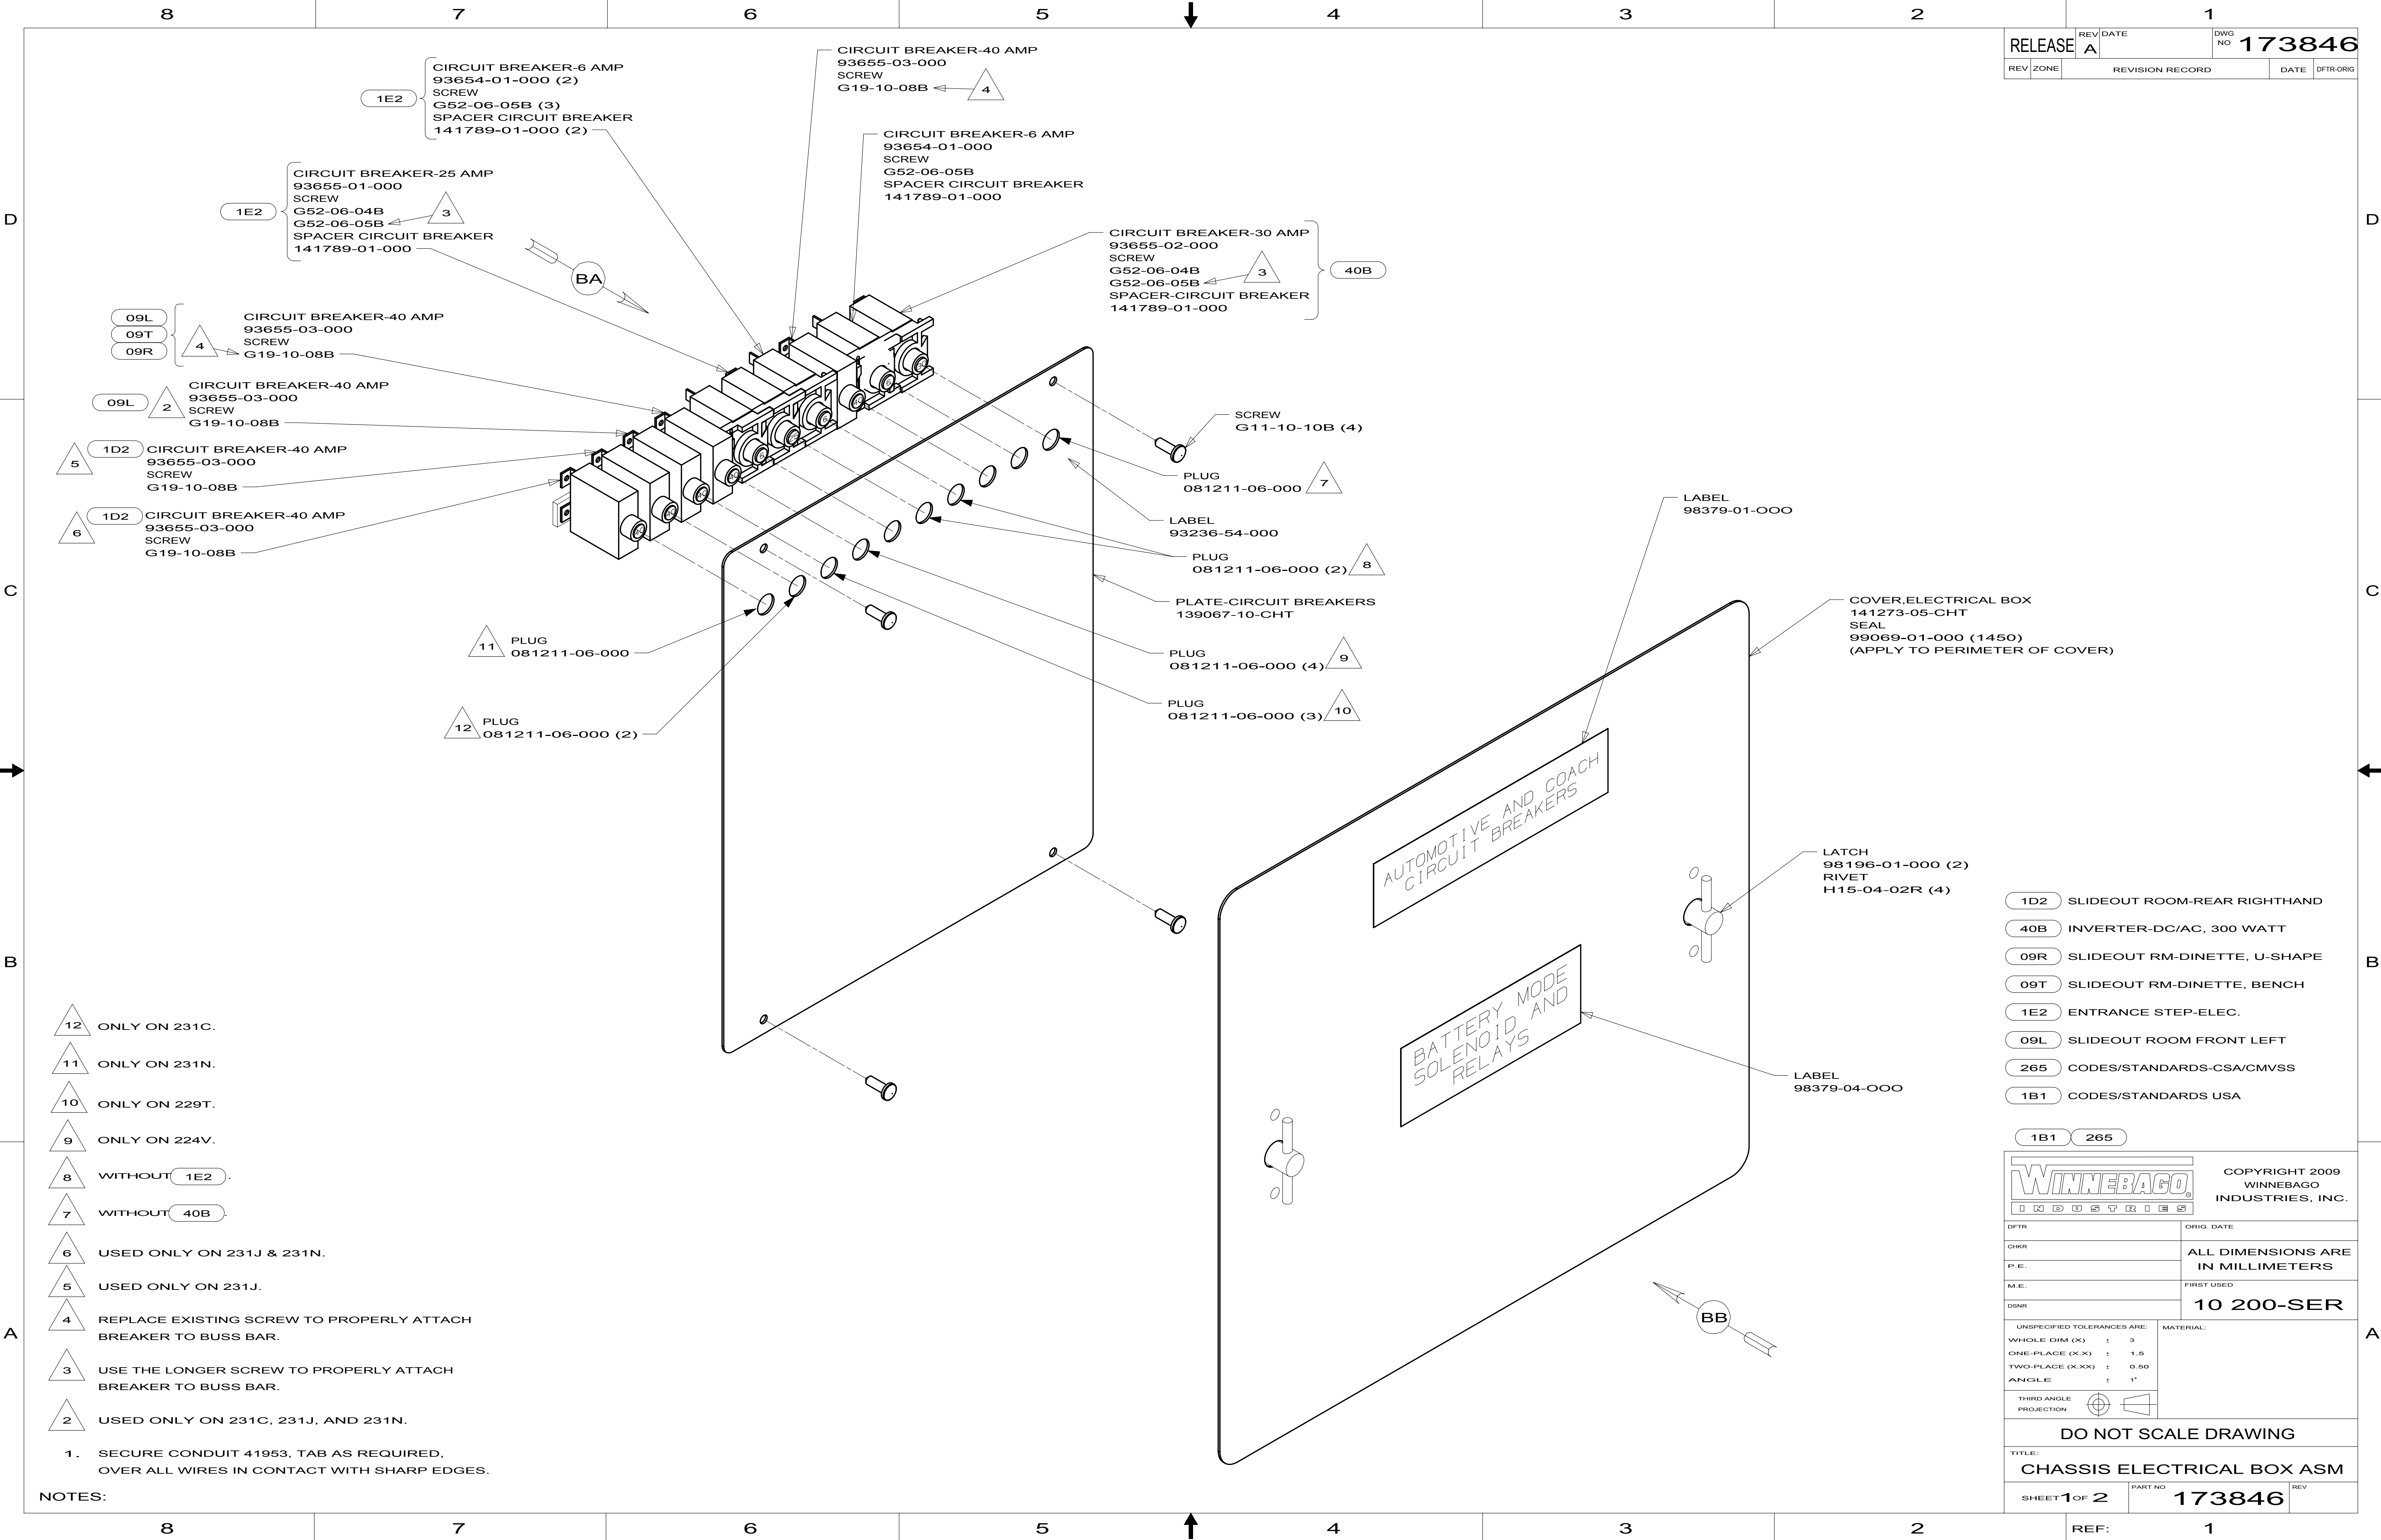FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



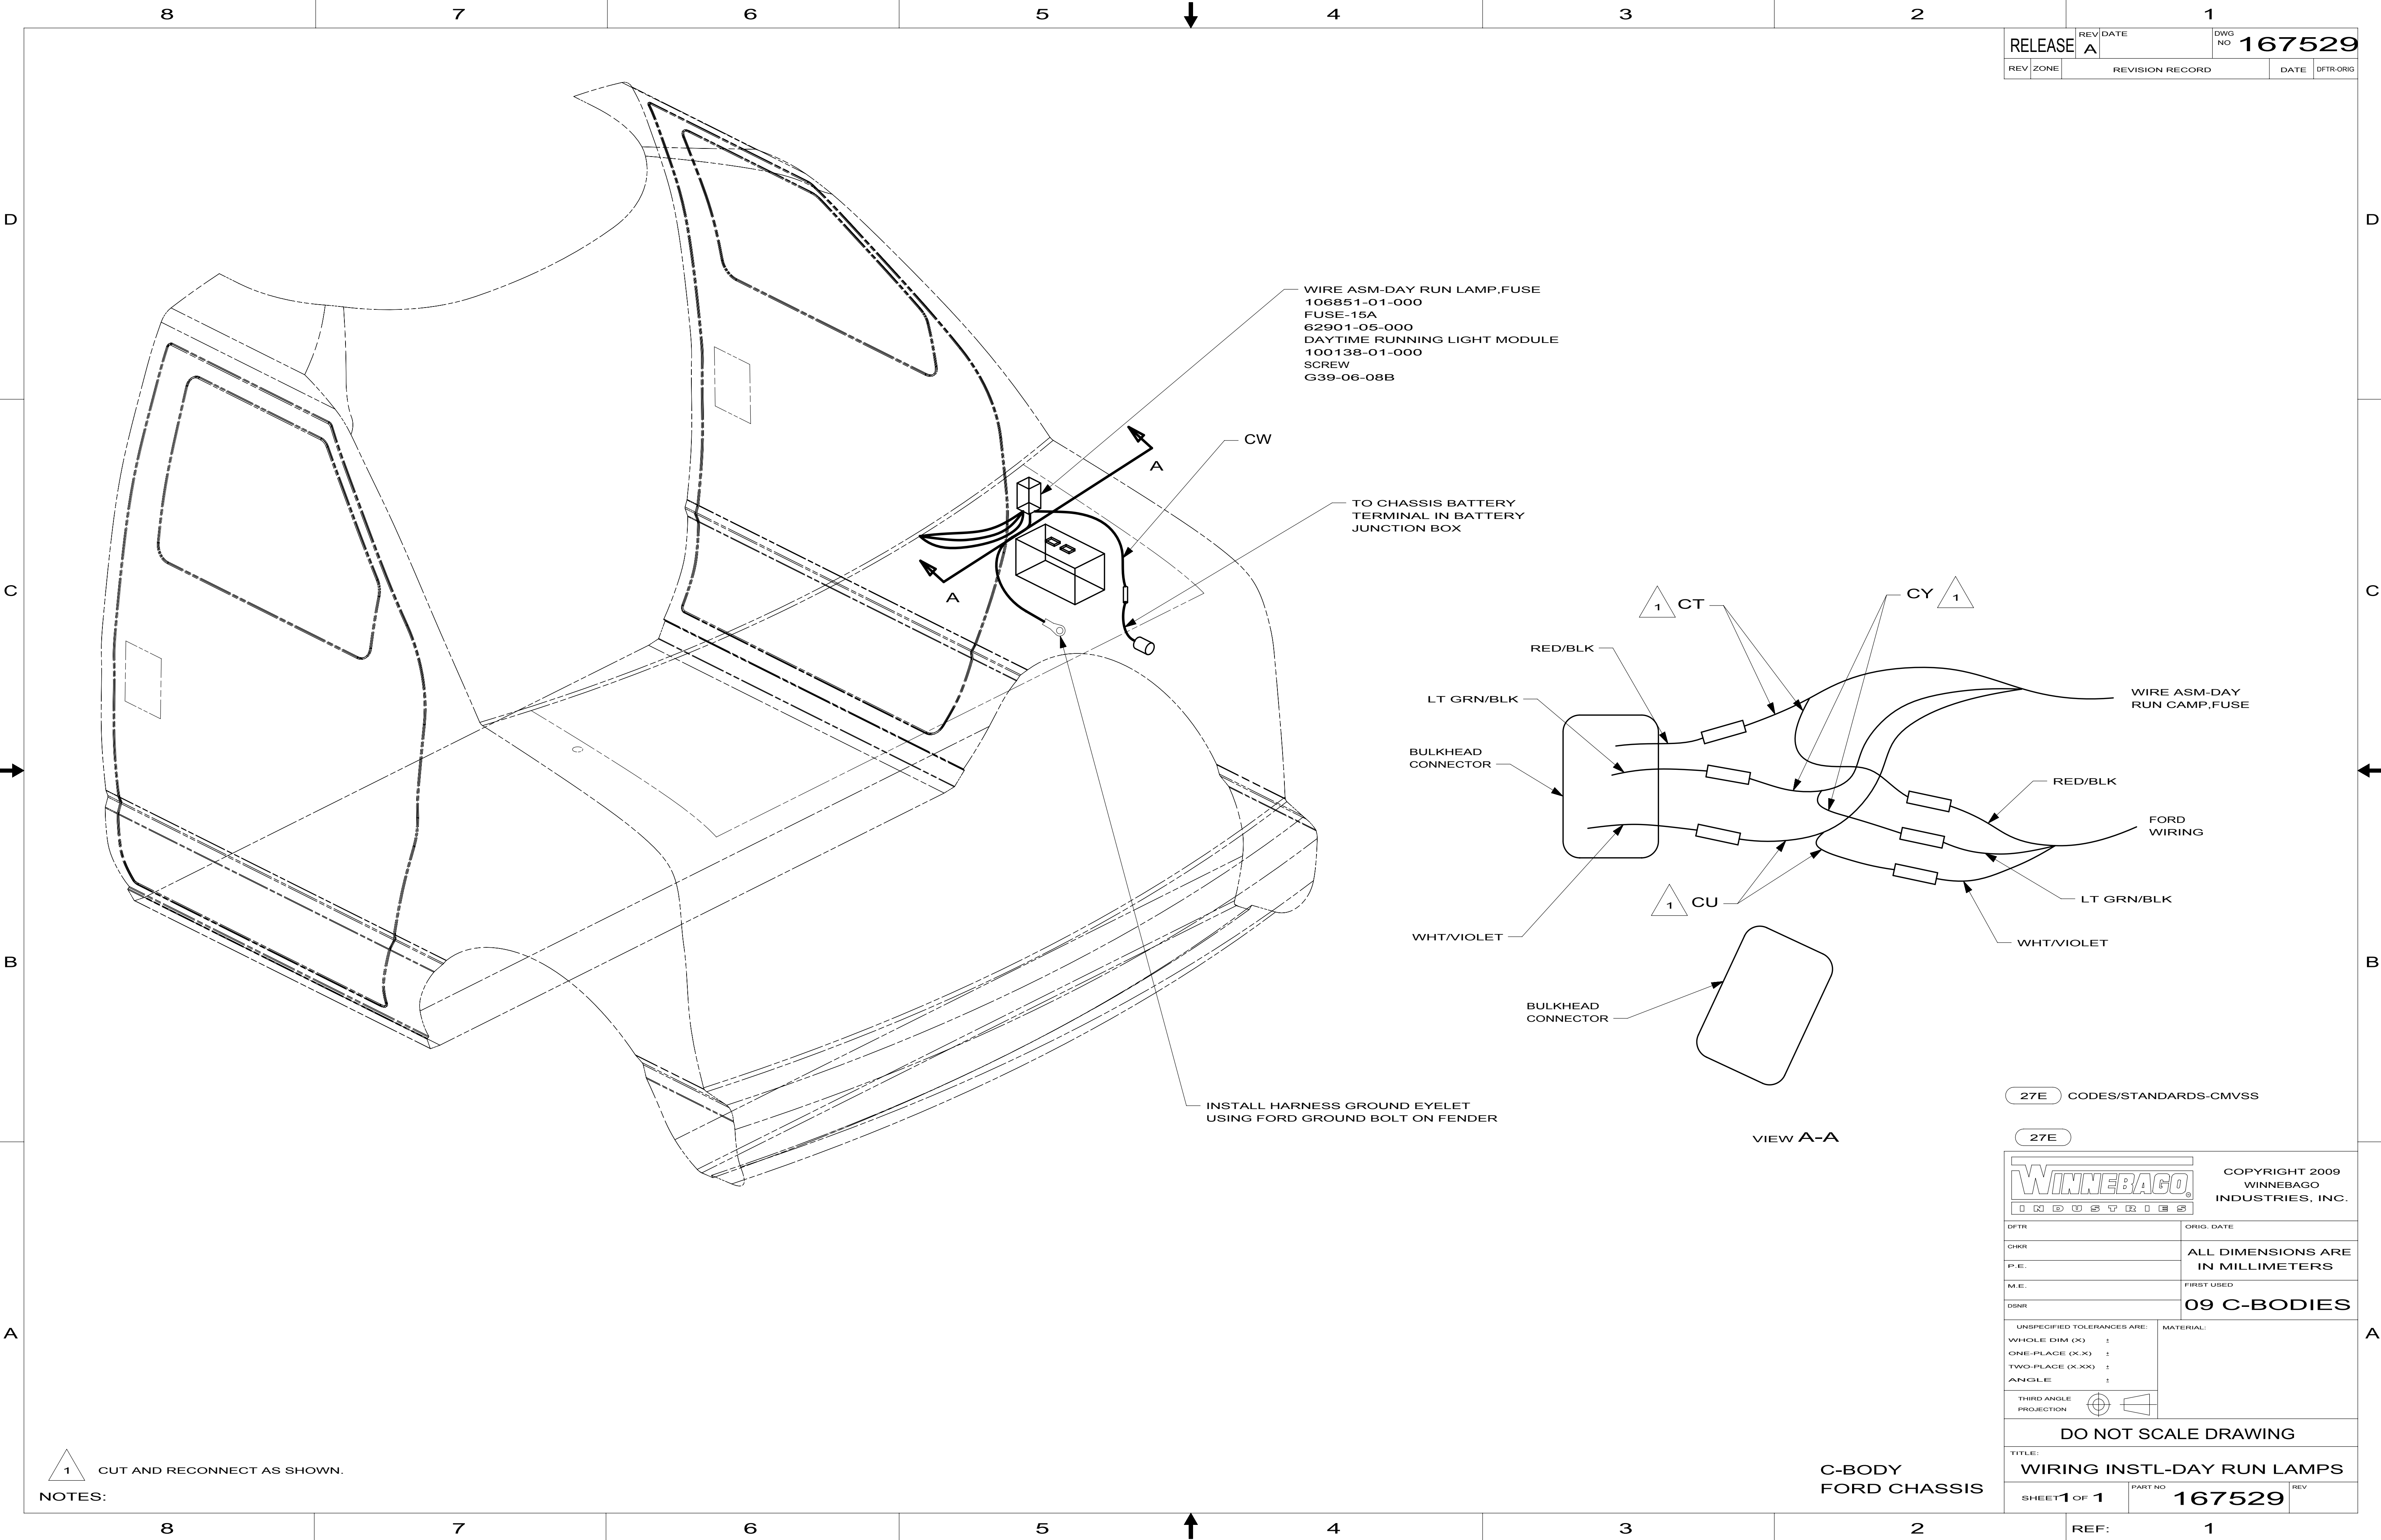
- 1D2 SLIDEOUT ROOM-REAR RIGHTHAND
- 40B INVERTER-DC/AC, 300 WATT
- 09R SLIDEOUT RM-DINETTE, U-SHAPE
- 09T SLIDEOUT RM-DINETTE, BENCH
- 1E2 ENTRANCE STEP-ELEC.
- 09L SLIDEOUT ROOM FRONT LEFT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA



WIRE ASM-DAY RUN LAMP,FUSE
106851-01-000
FUSE-15A
62901-05-000
DAYTIME RUNNING LIGHT MODULE
100138-01-000
SCREW
G39-06-08B

TO CHASSIS BATTERY
TERMINAL IN BATTERY
JUNCTION BOX

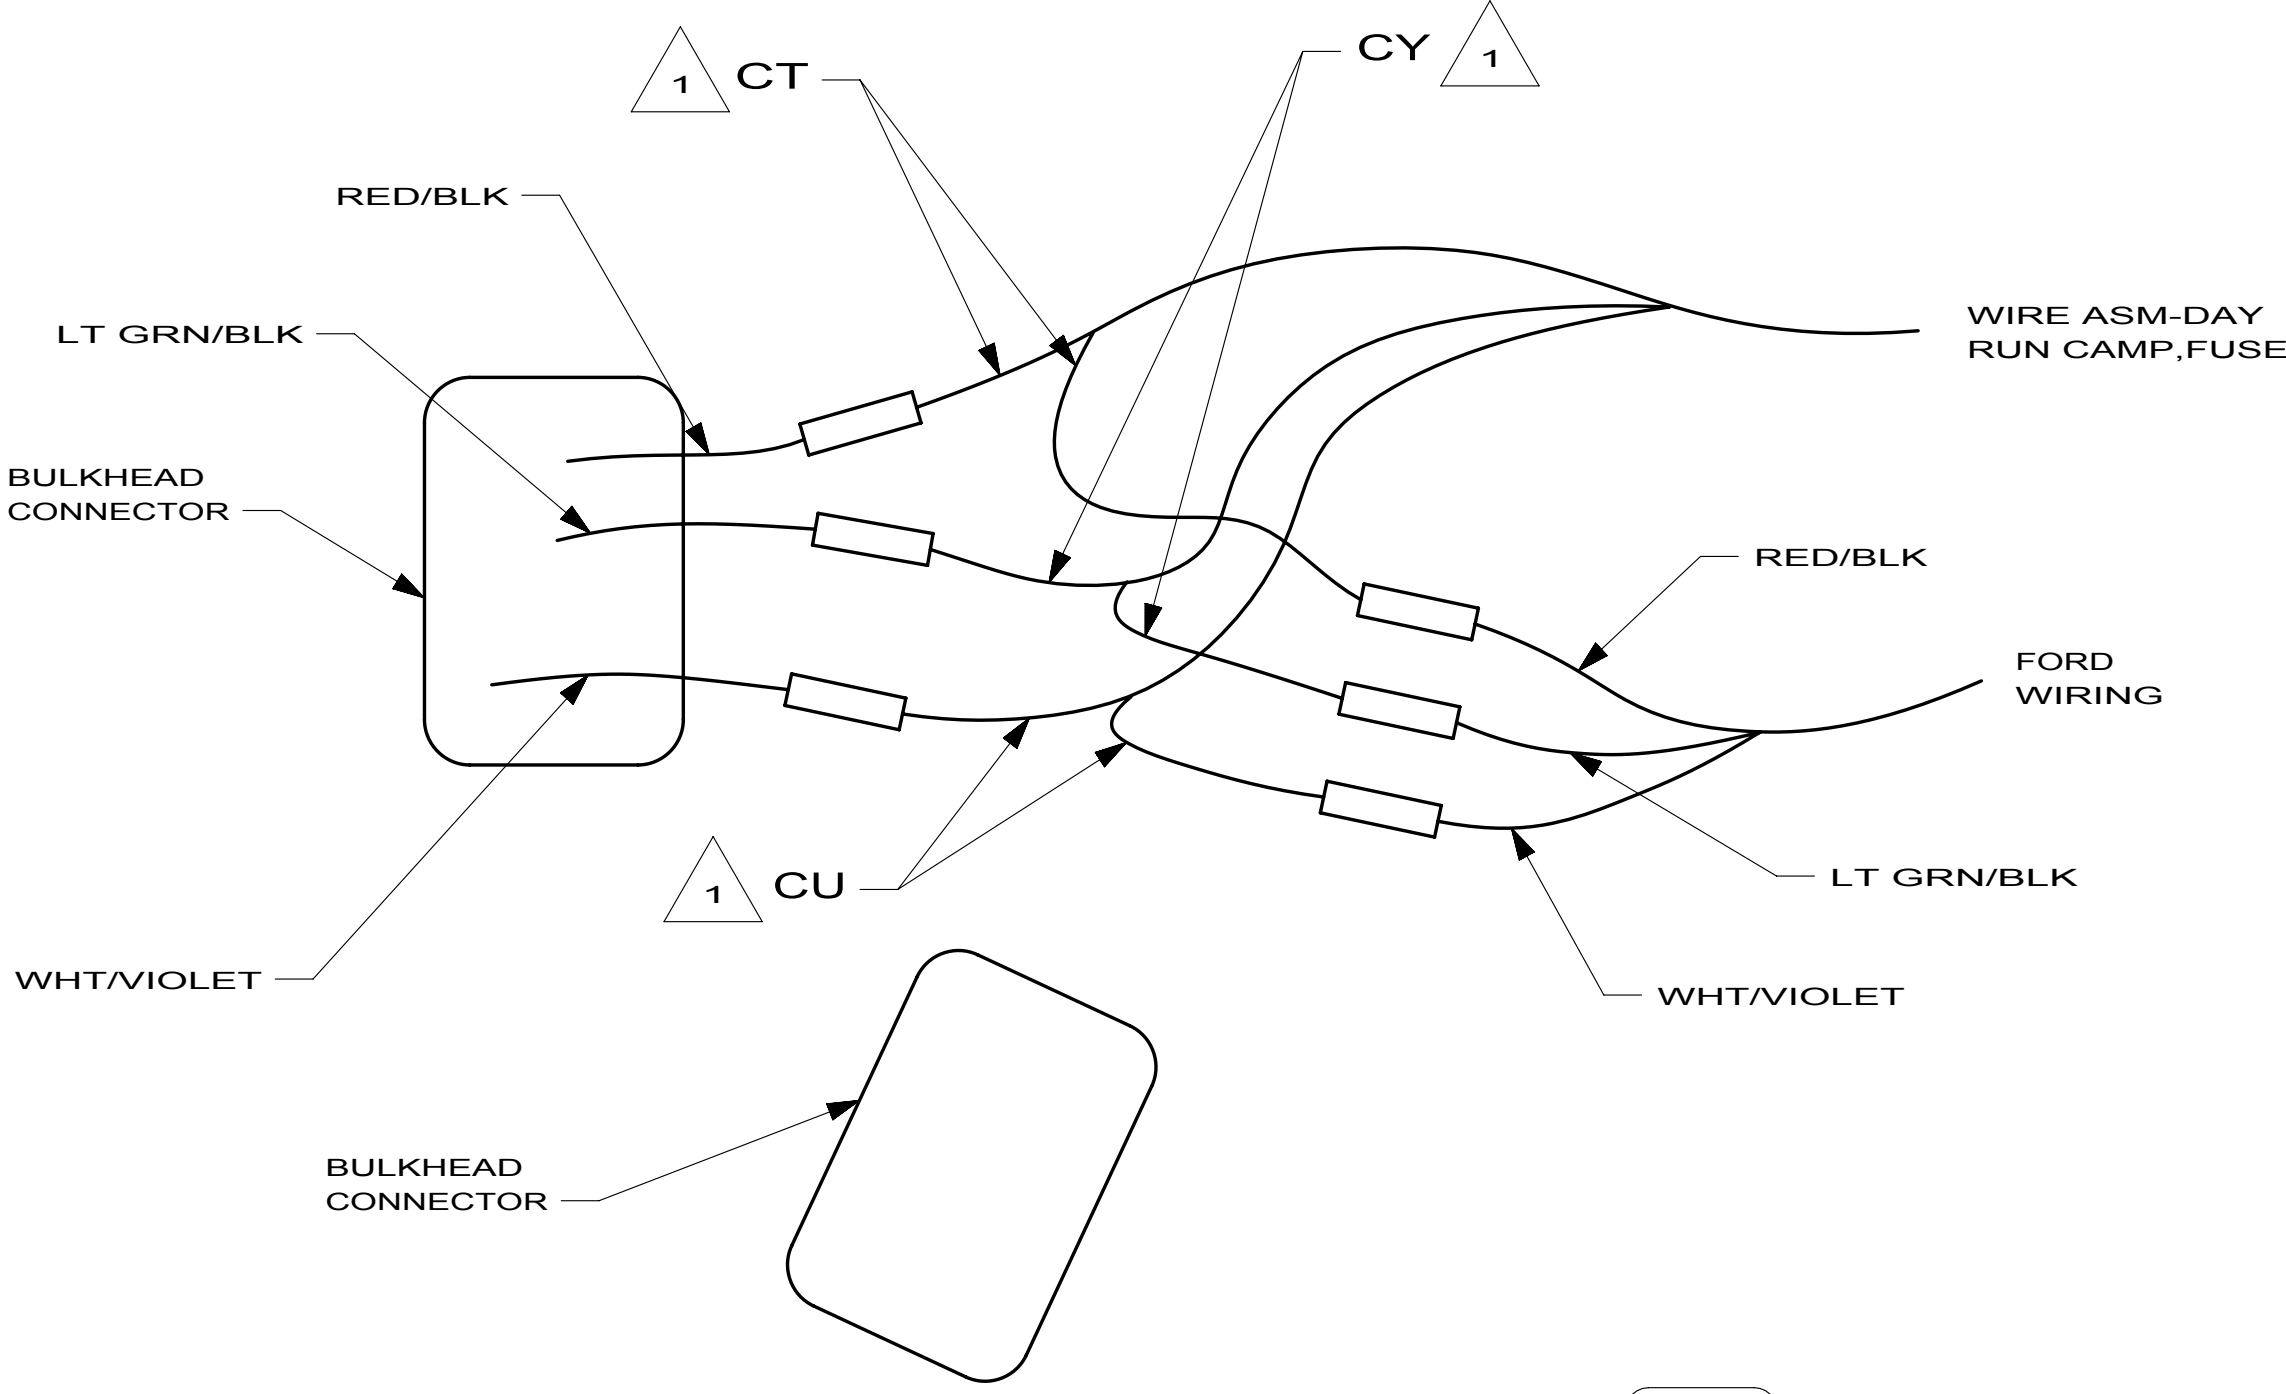INSTALL HARNESS GROUND EYELET
USING FORD GROUND BOLT ON FENDER



VIEW A-A


NOTES:
1 CUT AND RECONNECT AS SHOWN.

C-BODY
FORD CHASSIS

RELEASE		REV	DATE	DWG NO	167529
REV	ZONE	REVISION RECORD			DATE
					DFT-ORIG

27E CODES/STANDARDS-CMVSS

27E

WINNEBAGO® INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.			
DFT-OR				ORIG. DATE	
CHK-OR				ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.					
M.E.				FIRST USED	
DSNR				09 C-BODIES	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:			
WHOLE DIM (X) ±					
ONE-PLACE (X.X) ±					
TWO-PLACE (X.XX) ±					
ANGLE ±					
THIRD ANGLE PROJECTION					
					

DO NOT SCALE DRAWING

TITLE:
WIRING INSTL-DAY RUN LAMPS

SHEET 1 OF 1 PART NO 167529 REV

REF: 1

8

7

6

5

4

3

2

1

TERMINALS

NO.	PART NUMBER	DESCRIPTION
B-1 B-2 B-11 B-12	50003-01 50004-01 50003-02 50004-02	TERMINAL-PIN, 16-14 GA,.156 DIA TERMINAL-RECP, 16-14 GA,.156 DIA TERMINAL-PIN, 16-14 GA,.180 DIA TERMINAL-RECP, 16-14 GA,.180 DIA
WP-1 WP-2 WP-3	106950-01 106950-02 106950-03	TERMINAL-PIN, 16-14 GA TERMINAL-PIN, 10-12 GA TERMINAL-PIN, 8 GA
R-1 R-2 R-3 R-4 R-5 R-6 R-7 R-8 R-9	35416-01 35416-02 35416-03 35416-04 37018-01 102777-01 102777-02 102777-03 33787-01	TERMINAL-RING, #10 STD, 8 GA TERMINAL-RING, #10 STD, 6 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, 5/16 STD, 12-10 GA TERMINAL-RING, #6 STD, 14-16 GA TERMINAL-RING, #6 STD, 10-12 GA TERMINAL-RING, #6 STD, 8 GA TERMINAL-RING, #10 STD, 14 GA
R-60 R-61 R-62 R-63 R-64 R-65 R-66 R-67 R-68 R-69 R-70 R-71	8325-01 8326-01 8327-01 8328-01 8328-02 8329-01 8331-01 8332-01 8332-02 8350-01 99275-02 101397-01	TERMINAL-RING, 1/4 STD, 14-16 GA TERMINAL-RING, 3/8 STD, 14-16 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 8 GA TERMINAL-RING, 3/8 STD, 4 GA TERMINAL-RING, 1/4 STD, 6 GA TERMINAL-RING, 1/4 STD, 10 GA TERMINAL-RING, 3/8 STD, 6 GA TERMINAL-RING, 7/16 STD, 8 GA TERMINAL-RING, #10 STD, 14-16 GA
R-91 R-92 R-93 R-94	88791-01 88791-02 8348-01 99275-01	TERMINAL-RING, 3/8, 90° , 1/0 GA TERMINAL-RING, 3/8, 90° , 2 GA TERMINAL-RING, 3/8 STD, 2 GA TERMINAL-RING, 7/16 STD, 1/0 GA
RF-51 RF-52	7944-01 7945-01	TERMINAL-SPADE, 12-10 GA, #8 STUD TERMINAL-SPADE, 18-14 GA, #8 STUD
TR-1 TR-2 TR-3 TR-11 TR-12	47443-01 47443-02 47443-05 47443-03 47443-04	TERMINAL-RECP, 16-14 GA,.25, INS TERMINAL-RECP, 12-10 GA,.25, INS TERMINAL-RECP, 22-18 GA,.25, INS TERMINAL-RECP, 16-14 GA,.19, INS TERMINAL-RECP, 16-14 GA,.11, INS
TR-21	80015-01	TERMINAL-RECP, 22-18 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-22	80015-02	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-23	80015-03	TERMINAL-RECP, 16-14 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-24	80015-04	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .020
TR-51 TR-52 TR-53 TR-54 TR-55	7940-01 23809-01 23809-02 49270-01 7940-02	TERMINAL-RECP, 16-12 GA,.25, UNINS TERMINAL-RECP, 16-14 GA,.19, UNINS TERMINAL-RECP, 18-20 GA,.25, UNINS TERMINAL-RECP, 18-20 GA,.19, UNINS TERMINAL-RECP, 10 GA, .25, UNINS
TT-1 TT-2 TT-11	85745-02 85745-03 85745-04	TERMINAL-TAB, 16-14 GA,.25, INS TERMINAL-TAB, 10-12 GA,.25, INS TERMINAL-TAB, 18-22 GA,.19, INS
TT-51 TT-52	7942-01 7943-01	TERMINAL-TAB, 16-14 GA,.25, UNINS TERMINAL-TAB, 14-10 GA,.25, UNINS
MF6-1	129236-01	TERMINAL-FEM, M/P, 630, 10-12
MF6-2	129236-02	TERMINAL-FEM, M/P, 630, 14-16

1

2

FOR RECP-BLANK, DET-X DENOTES DETAIL VIEW.

CONTACT WIRE PREP PRIOR TO USING FOR TOOLING PURPOSES.

NOTES:

SPLICES

NO.	PART NUMBER	DESCRIPTION
BS-1 BS-2 BS-3 BS-SB	31876-01 31876-02 31876-03 100070-01	SPLICE-BUTT, 16-14 GA, BLUE SPLICE-BUTT, 12-10 GA, YELLOW SPLICE-BUTT, 22-18 GA, RED SPLICE-BUTT, 14-16 GA, SHRINK,BLUE
BS-RB	112823-01	SPLICE-BUTT, 14-22 GA, REDUCER
BS-RS	173854-01	SPLICE-BUTT, 14-22 GA, REDUCER, SHRINK
S-1 S-2	7946-01 23808-01	SPLICE, 1-6 MM² SPLICE, 6-9 MM²
I-2 I-5	7956-02 7956-05	SHRINK WRAP .375 DIA SHRINK WRAP .25 DIA
SH-1	58028-01	SPLICE-HAT
S-10	101173-01	SPLICE-BARREL, 26300 CMA

NO.	PART NUMBER	DESCRIPTION
SP-1	90986-02	PLUG ASM-ELECTRIC STEP
SP-2	142524-01-000 098261-01-000 098262-07-000 098261-02-000 (3) 098262-01-000 (3)	HOUSING-4 PIN SOCKET-CONNECTOR SEAL-CONNECTOR SOCKET-CONNECTOR SEAL-CONNECTOR
HR-1	63910-01	HOUSING-RELAY
MP-8 MP-10 MPP CAV-1 CON-3	125323-02 125323-01 125324-01 125325-01 98262-03	HOUSING-PIN, 8 CAVITY HOUSING-PIN, 10 CAVITY TERMINAL-MALE, M/P, 150 SEAL-CAVITY, 150-SERIES M/P SEAL-CONNECTOR
LS-8 LS-10	125323-03 125323-04	LOCK-SECONDARY 8 POSITION LOCK-SECONDARY 10 POSITION
H-8 H-12	108355-01 108355-02	HOUSING-SWITCH, 8 POSITION HOUSING-SWITCH, 12 POSITION

NO.	PART NUMBER	DESCRIPTION
GEN-1	125323-02-000 125324-01-000 (4) 098262-03-000 (4) 125325-01-000 (4) 125323-03-000	HOUSING-8 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 8 POSITION
GEN-2	125323-01-000 125324-01-000 (5) 098262-03-000 (5) 125325-01-000 (5) 125323-04-000	HOUSING-10 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 10 POSITION

HOUSINGS AND TERMINALS

NO.	PART NUMBER	DESCRIPTION
HS-2 HS-3 HS-4 HS-5 HS-6 HS-7 HS-9 HS-12 HS-15 HS-2-R	88474-10 88474-09 88474-08 88474-07 88474-06 88474-05 88474-03 88474-01 88474-02	HOUSING-SOCKET, 2 CAVITY HOUSING-SOCKET, 3 CAVITY HOUSING-SOCKET, 4 CAVITY HOUSING-SOCKET, 5 CAVITY HOUSING-SOCKET, 6 CAVITY HOUSING-SOCKET, 6 CAVITY-IN LINE HOUSING-SOCKET, 9 CAVITY HOUSING-SOCKET, 12 CAVITY HOUSING-SOCKET, 15 CAVITY HOUSING-SOCKET, 2 CAVITY-RED
HP-2 HP-3 HP-4 HP-5 HP-6 HP-7 HP-8 HP-9 HP-12 HP-15 HP-2-R HP-3-B HP-3-G HP-3-R	88473-10 88473-09 88473-08 88473-07 88473-06 88473-05 88473-04 88473-03 88473-01 88473-02 88473-15 88473-12 88473-13 88473-14	HOUSING-PIN, 2 CAVITY HOUSING-PIN, 3 CAVITY HOUSING-PIN, 4 CAVITY HOUSING-PIN, 5 CAVITY HOUSING-PIN, 6 CAVITY HOUSING-PIN, 6 CAVITY-IN LINE HOUSING-PIN, 8 CAVITY-IN LINE HOUSING-PIN, 9 CAVITY HOUSING-PIN, 12 CAVITY HOUSING-PIN, 15 CAVITY HOUSING-PIN, 2 CAVITY-RED HOUSING-PIN, 3 CAVITY-BLUE HOUSING-PIN, 3 CAVITY-GREEN HOUSING-PIN, 3 CAVITY-RED
TS-1 TS-2	88476-01 88476-02	SOCKET-CONNECTOR, 20-14 GA SOCKET-CONNECTOR, 12-10 GA
TP-1 TP-2	88475-01 88475-02	PIN-CONNECTOR, 20-14 GA PIN-CONNECTOR, 12-10 GA
HS2HA HP2HA	137208-01 137207-01	HOUSING-SOCKET, 2 CAVITY-HIGH AMP HOUSING-PIN, 2 CAVITY-HIGH AMP
TS-HA TP-HA	137210-01 137209-01	SOCKET-CONNECTOR, 10AWG HIGH AMP PIN-CONNECTOR, 10AWG HIGH AMP
H-HA	104100-01	HOUSING, 1 CAVITY 75 AMP
T-HA	104100-03	TERMINAL 10 AWG - 6 AWG 75 AMP

BALLOON CALLOUT LEGEND

110 V WIRE	TERMINALS/SPLICES	RECEPTACLES
PART NUMBER COLOR LENGTH	PART NUMBER QUANTITY	PART NUMBER CIRCUIT COLOR LOCATION
POWER CORD	CONDUIT	12 V WIRE
WIRE GUAGE LENGTH IN FEET APPROVAL/ LISTING	TYPE DIA IN 1/16" INCREMENTS LENGTH (mm)	CIRCUIT COLOR & WIRE GAUGE HOUSING POSITION/ TERMINATION

WINNEBAGO INDUSTRIES

COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.

DFTB

CHRR

P.E.

M.E.

DSNR

ORIG. DATE

ALL DIMENSIONS ARE IN MILLIMETERS

FIRST USED

96 MH'S

UNSPECIFIED TOLERANCES ARE:

WHOLE DIM (X) ±

ONE-PLACE (X.X) ±

TWO-PLACE (X.XX) ±

ANGLE ±

MATERIAL:

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

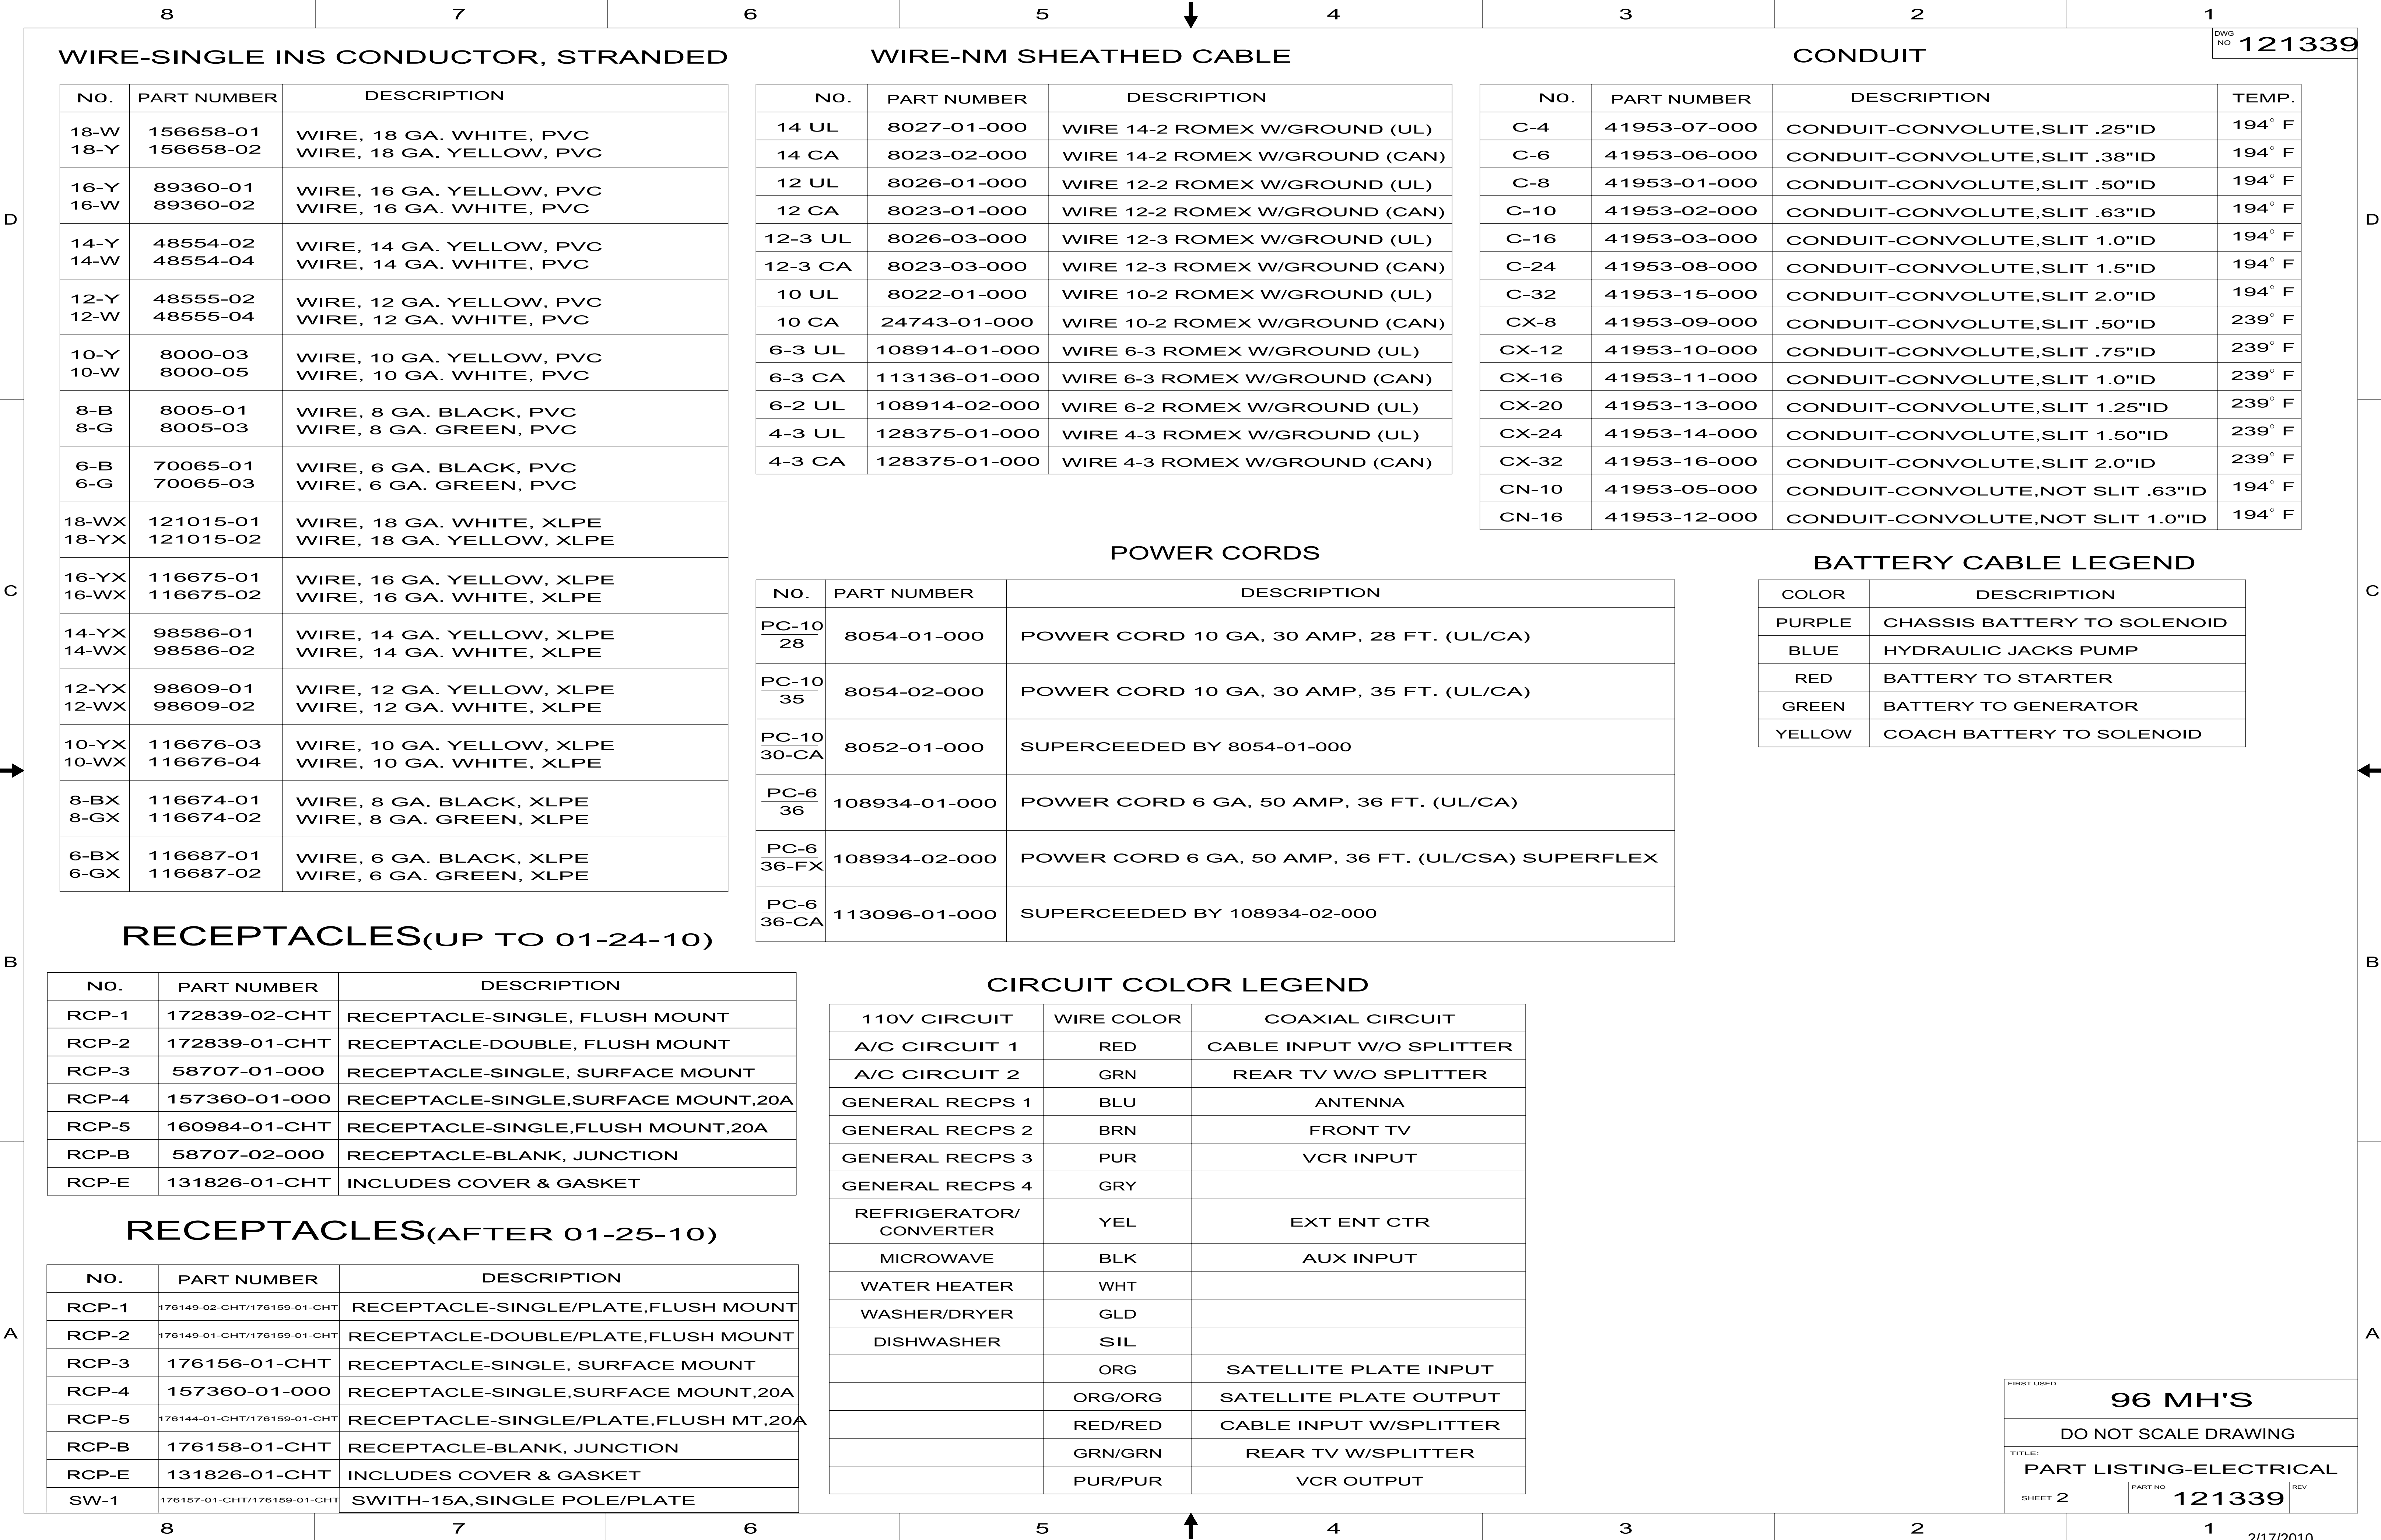
SHEET 1 OF 7

PART NO 121339

REV

REF: 1

2/17/2010



8

7

6

5








4

3


2

1

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-1	LAMP 98024-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-1	LAMP 98024-03-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-1	LAMP 98024-05-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-1	LAMP 98024-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N1	LAMP 98024-07-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LF2N1	LAMP 98024-08-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN1	LAMP 98024-09-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,PORCH

NO	PART NUMBER	DESCRIPTION
LEXT-1	LAMP 97917-01-CHT SCREW G67-10-129 (4) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, SURFACE MOUNT BARGMAN 
LEXT-2UL	LAMP 8089-01-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED UL LIST JRV PROD 
LEXT-2CA	LAMP 8089-02-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED CAN LIST JRV PROD 
LEXT-3	LAMP 171513-01-CHT SCREW G67-10-129 (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH SURFACE MOUNT OPTRONICS

87.0

22.2 R

96

CUT OUT IN PANEL

HALOGEN LAMP

LINE SPRING CLIPS UP WITH RELIEF IN CUT OUT

DETAIL CA

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

XXXXXX

XX

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 3





PART NO121339

REV





DWG NO121339


























2/17/2010

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-2	LAMP 137417-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-2	LAMP 137417-04-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-2	LAMP 137417-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-2	LAMP 137417-05-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N2	LAMP 137417-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN2	LAMP 137417-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,HALOGEN







NO	PART NUMBER	DESCRIPTION
HAL	LAMP 123775-01-CHT SCREW (SUPPLIED) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING 1 BULB 
HAL-S	LAMP 123775-01-CHT SPACER 123775-02-CHT SCREW G13-06-16U (3) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING WITH 3/4" SPACER 1 BULB 
HAL-2	LIGHT-HAL,ROUND 165170-01-CHT SCREW G13-06-12B (2) CONNECTOR 58028-01-000 (2)	LIGHT-HALOGEN, ROUND 3" 
HAL-4	LIGHT-HAL,ROUND 165643-01-CHT SCREW G13-05-16B (3) CONNECTOR 58028-01-000 (2) (SEE DETAIL CA)	LIGHT-HALOGEN, ROUND 4.5" 

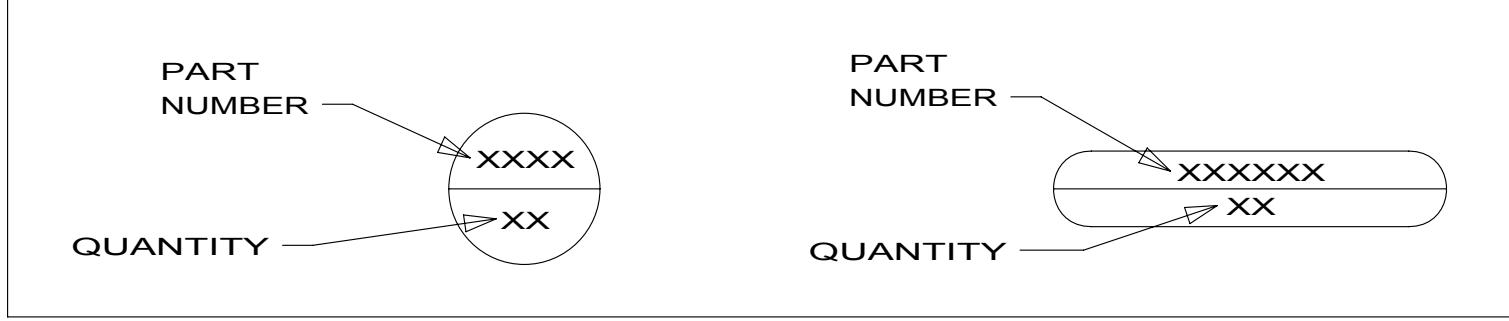8			7			6			5			4			3			2			1																																																					
LAMP ASM-PACKAGE,FLUORESCENT																		LAMP ASM-PACKAGE,MAKEUP LAMP																		LAMP ASM-PACKAGE,OTHER																		LAMP ASM-PACKAGE,PANCAKE																		DWG NO 121339		
NO		PART NUMBER				DESCRIPTION										NO		PART NUMBER				DESCRIPTION										NO		PART NUMBER				DESCRIPTION																																				
FLU-1		LAMP 91936-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH THIN-LITE 										LMU3-1		LAMP 110235-01-CHT SCREW W/SPACER (SUPPLIED) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB (SUPPLIED) PROGRESSIVE DYNAMICS 										LSH-1		LAMP 121935-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-SHOWER PROGRESSIVE DYNAMICS INC. 										LF1-3		LAMP 170693-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH GUSTAFSON 																				
FLU-2		LAMP 91936-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/SWITCH THIN-LITE 										LMM3-2		LAMP 123774-03-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 3 BULB GUSTOFSON 										LSH-2		LAMP 164039-01-CHT SCREW G11-08-16U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER 										LF2-3		LAMP 170693-04-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH GUSTAFSON 																				
FLU-3		LAMP 127327-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 1-12" BULB W/SWITCH THIN-LITE 										LMU3-2		LAMP 138116-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 										LSH-3		LAMP 164040-01-CHT SCREW G13-07-12U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER GLASS 										LO1-3		LAMP 170693-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH GUSTAFSON 																				
FLU-4		LAMP 130338-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT W/SWITCH THIN-LITE 										LMU3-3		LAMP 162446-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 										LCR-1		LAMP 61424-01-000 SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE RAMCO (RECTANGULAR) 										LO2-3		LAMP 170693-05-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH GUSTAFSON 																				
FLU-5		LAMP 153464-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336										LMU4-1		LAMP 110235-02-CHT SCREW G11-08-16U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB PROGRESSIVE DYNAMICS 										LCS-1		LAMP 108354-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE ITC MARINE (SQUARE) 										LF1N3		LAMP 170693-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH GUSTAFSON 																				
FLU-6		LAMP 130338-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT WARM WHITE BULB W/SWITCH THIN-LITE 										LMU4-2		LAMP 138116-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 										READ-1		LIGHT-READING 132427-01-CHT SCREW SUPPLIED W/ LIGHT CLIP-U 141395-02-CHT (2) CONNECTOR 58028-01-000 (2)				LIGHT-READING,SWIVEL,ROUND 1 BULB 										LFSN3		LAMP 170693-06-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH GUSTAFSON 																				
FLU-7		LAMP 153464-05-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336										LMU4-3		LAMP 162446-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 										READ-2		LIGHT-READING 128786-02-CHT SCREW G11-08-16J (2) BULB 123917-01-000 CONNECTOR 58028-01-000 (2)				LIGHT,READING,SWIVEL 										LOSN3		LAMP 170693-07-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 2 BULB W/O SWITCH GUSTAFSON 																				
FLU-8		LAMP 173072-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" ONE 8 WATT BULB W/SWITCH OPTRONICS 										LMM4-2		LAMP 123774-01-CHT SCREW G11-08-16U (2) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 4 BULB GUSTOFSON 										READ-3		LIGHT-READING 170833-01-CHT SCREW SUPPLIED W/LIGHT CONNECTOR 58028-01-000 (2)				LIGHT,READING,HAL 										LO1N3		LAMP 170693-08-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 1 BULB W/O SWITCH GUSTAFSON 																				
FLUN1		LAMP 91936-04-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH THIN-LITE 																																																																				
FLUN2		LAMP 91936-03-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH THIN-LITE 																																																																				
FLUN3		LAMP 153464-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336																																																																				
FLUN4		LAMP 153464-03-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 480																																																																				
FLUN5		LAMP 153464-06-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 480																																																																				
FLUN6		LAMP 153464-04-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336																																																																				
																																				LEGEND																																						
																																																																										
																																																																								</		


87654321

DWG NO121339

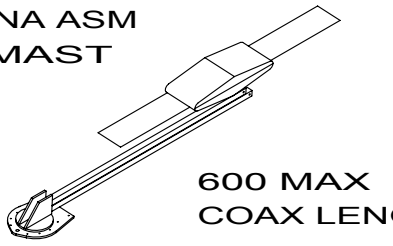
ANTENNA ASM-PACKAGE

NO	PART NUMBER	DESCRIPTION
ANT-1	ANTENNA 76319-24-000 HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) CLIP 80734-02-000	ROOF MOUNT TV ANTENNA ASM 25.5" MAST  600 MAX COAX LENGTH
ANT-2	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANT-2W	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA WEDGE 76319-26-000	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANTA-1	ANTENNA 158270-01-CHT BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-WINGMAN, ACCESSORY 173519-03-CHT	ROOF MOUNT TV ANTENNA ASM AUTOMATIC  600 MAX COAX LENGTH
ANT-3	ANTENNA-TV ROOF MNT.ROUND 167632-01-CHT PLATE-ROOF, CABLE ENTRY 146488-01-000 SCREW G67-10-129 (10) CABLE ASM-COAX 87105-01-006 ADAPTER 82134-01-000	ROOF MOUNT OMNI- DIRECTIONAL ANTENNA MOUNTING SCREWS SUPPLIED WITH ANTENNA 
ANT-4	ANTENNA 173519-01-CHT HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-HANDLE EXTENSION 173519-02-CHT	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH



SENSORS

NO	PART NUMBER	DESCRIPTION
LPGD	LP GAS DETECTOR 150138-03-CHT SCREW G68-06-10U (2)	DETECTOR-LP GAS 



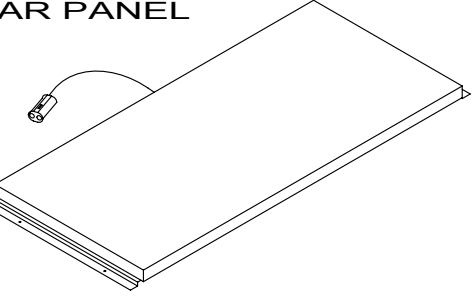
PANELS

NO	PART NUMBER	DESCRIPTION
SOLAR	PANEL-SOLAR 10 WATT 151647-01-000 (UP TO 03-14-10) 176161-01-000 (AFTER 03-15-10) SCREW G11-08-12U (4)	SOLAR PANEL 




ANTENNA ASM-PACKAGE

ANTEXT-1	CABLE ASM-EXTENS 77069-02-000	RADIO ANTENNA CABLE EXTENSION 2400MM USABLE LENGTH 
ANTKIT-1	ADAPTER-PLATE 76319-06-000 SCREW G11-08-08T (6) CLIP-WIRE 80734-02-000 SCREW G11-08-08T	PLATE ASM-ADAPTERS CABLE ROOF MOUNTING PLATE W/ CABLE-CABLE ADAPTER, FITTINGS, AND CABLE RETAINING CLIP 
ANT-R	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT ANTENNA 109889-04-000 BRACKET-ANTENNA GROUND 147741-01-CHT	ROOF MOUNT RADIO ANTENNA 
ANTEXT-2	CABLE ASM-EXTENS 77069-03-000	RADIO ANTENNA CABLE EXTENSION 6600 MM USABLE LENGTH
ANT-A	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT 76 MM 171825-01-000 (2) BRACKET-GROUND 147741-01-CHT NUT OMD01K-06-000 (2)	ROOF MOUNT RADIO ANTENNA THICK ROOF

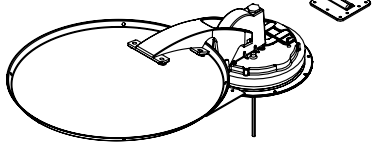SATELLITE DISH INSTL

DM-1	SATELLITE DISH 137135-02-000 SCREW G67-10-12B (8) PLATE & BRACKET (SUPPLIED) SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 
DA-1	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-1	SATELLITE DISH 154474-04-CHT SCREW G39-10-12B (12) PLATE 146488-01-000 SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM IN MOTION SETUP 

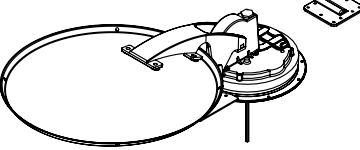SATELLITE DISH INSTL

DA-2	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-2	SATELLITE DISH 154474-04-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DM-2	SATELLITE DISH 137135-05-000 PLATE-ROOF,ENTRY (SUPPLIED WITH SATELLITE DISH) SCREW G67-10-12U (8) (FOR ROOF PLATE) SCREW G67-10-12U (10) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 

LEGEND

PART NUMBER

QUANTITY

PART NUMBER

QUANTITY

1

ADD BUMPER TO BOTTOM SIDE OF ANTENNA WINGS TO PREVENT DAMAGE TO ROOF.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 5

PART NO121339

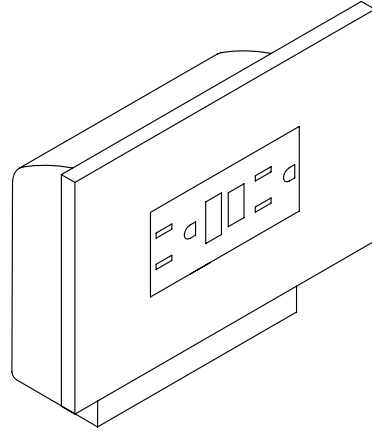
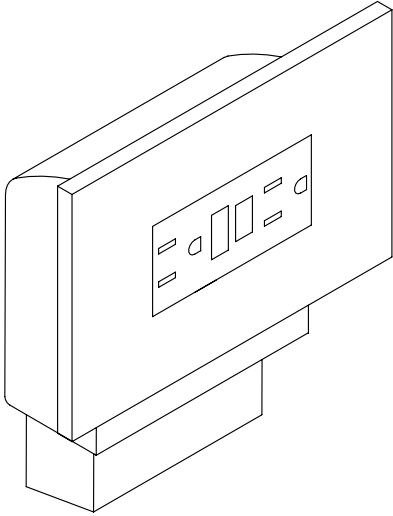
REV

2/17/2010



87654321

DWG NO121339






RECEPTACLE PACKAGE-GFI

NO	PART NUMBER	DESCRIPTION
<u>GFI</u> US	RECEPTACLE 163319-01-CHT BOX 91910-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI</u> CAN	RECEPTACLE 163319-01-CHT BOX 91910-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

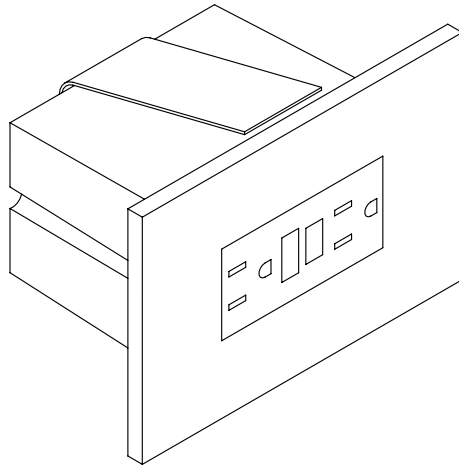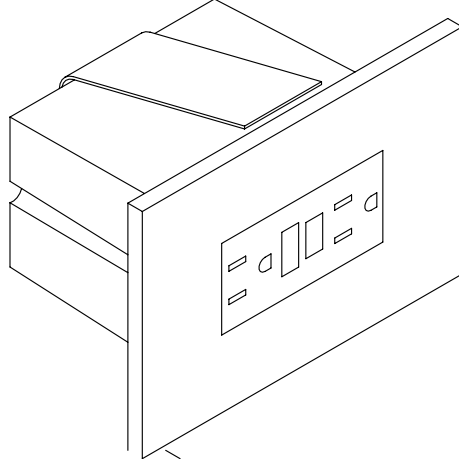RECEPTACLE PACKAGE-GFI


NO	PART NUMBER	DESCRIPTION
<u>GFI-1</u> US	RECEPTACLE 163319-01-CHT BOX 133070-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI-1</u> CAN	RECEPTACLE 163319-01-CHT BOX 133070-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

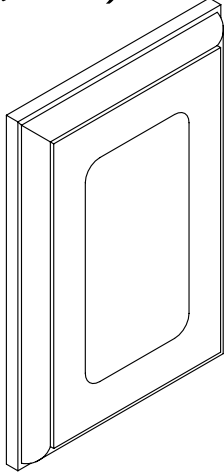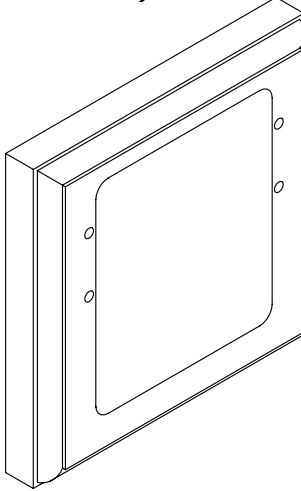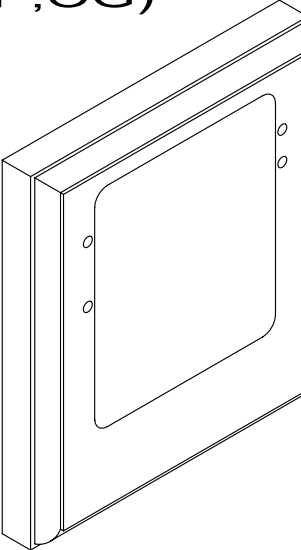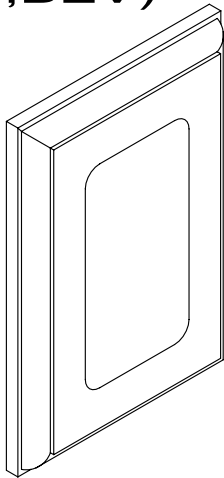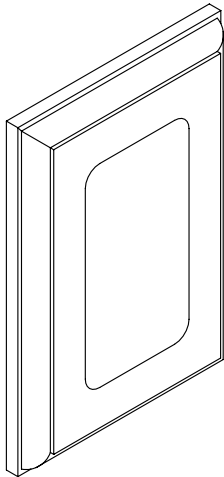SPACERS

NO	PART NUMBER	DESCRIPTION
SP-01	SPACER 102568-01-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,OG) 
SP-02	SPACER 102568-02-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (US) (WOOD,VYL RAP,OG) 
SP-03	SPACER 102568-03-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (CANADA) (WOOD,VYL RAP,OG) 
SP-04	SPACER 133713-01-CHT	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,BEV) 
SP-05	SPACER 133713-20-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,BEV) 

SP-21

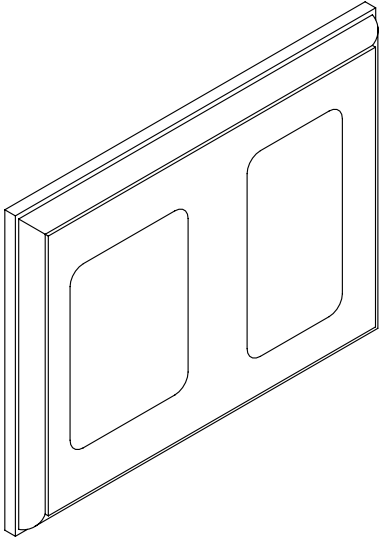SPACER
126052-01-XXX

WOOD SPACER FOR 1 - 110V
RECEPTACLE AND 1 - REAR TV
(12V) JACK
(WOOD,BEV)


LEGEND

MISC.	SPACER
PART NUMBER LISTING XXXX XXX	XXXX PART NUMBER

NOTES:

1

APPLY TUBING TO BARE GROUND WIRES.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 6

PART NO121339

REV

2/17/2010

87654321

D

C


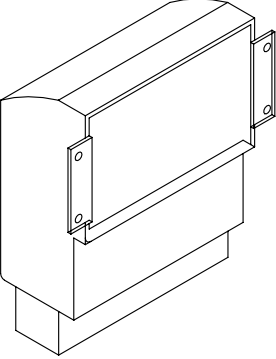
B

A


1

DWG NO121339


PREP-A/C, RECESSED (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP A/C-US	BOX 91910-02-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). US APPLICATION (RECESSED IN ROOF) 
PREP A/C-CAN	BOX 91910-01-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). CANADA APPLICATION (RECESSED IN ROOF) 

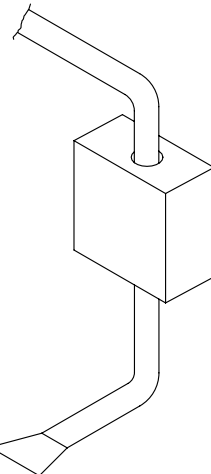
CONNECTION BOX-POWER CORD

NO	PART NUMBER	DESCRIPTION
J-PC 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2)	CONNECTION BOX IN POWER CORD COMPT FOR POWER CORD (US & CA APPLICATION) 
J-PC 30-US	WIRE ASM-GROUND 133678-02-000 CONNECTOR 8314-01-000 (3)	
J-PC 30-CA	CONNECTOR 8356-02-000 CONNECTOR (PC) 8355-01-000	

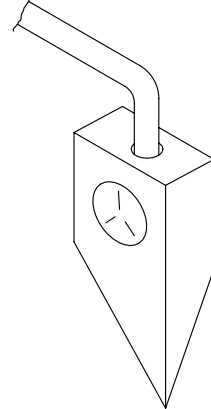
CONNECTION BOX-GENERATOR RECEPTACLE

NO	PART NUMBER	DESCRIPTION
J-RCP 30	BOX 8289-01-000 RECEPTACLE 24924-02-000	CONNECTION BOX IN POWER CORD COMPT FOR THE GENERATOR RECEPTACLE (US & CA APPLICATION) 
J-RCP 30-US	COVER 69238-01-000 SCREW G67-10-10B (2)	
J-RCP 30-CA	WIRE ASM-GROUND 133678-02-000 133678-04-000 CONNECTOR 8314-01-000 TUBING-VINYL 8041-02-000 (150MM)	

CONNECTION BOX, GENERATOR SERVICE FEED

NO	PART NUMBER	DESCRIPTION
J-GEN 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2)	BOX AND EQUIPMENT USED FOR CONNECTING THE GENERATOR LEADS TO THE SERVICE ENTRANCE WIRES (US & CA APPLICATION) 
J-GEN 30-US	WIRE ASM-GROUND 133678-02-000 WIRE NUT-GREY 8314-01-000 (3)	
J-GEN 30-CA	CONNECTOR-WIRE 8356-01-000	

PREP-A/C, SURFACE (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP SURF	BOX 93603-01-000 COVER 53337-01-000 LABEL 91243-01-000 WIRE-BONDING 8019-01-000 SCREW G11-08-12B (2) TERMINAL 8328-01-000 CONNECTOR 8313-01-000 (2) CONNECTOR 8311-01-000	SURFACE MOUNT, US AND CANADA, BOX AND EQUIPMENT FOR A/C PREP (W/OUT FACTORY A/C). TYPICALLY LOCATED ON OVERHEAD CABINET INNER WALL OR ON CEILING. 

LEGEND

PART NUMBER

LISTING

XXXX

XX

NOTES:

1 APPLY TUBING TO BARE GROUND WIRES.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL

SHEET 7

PART NO 121339

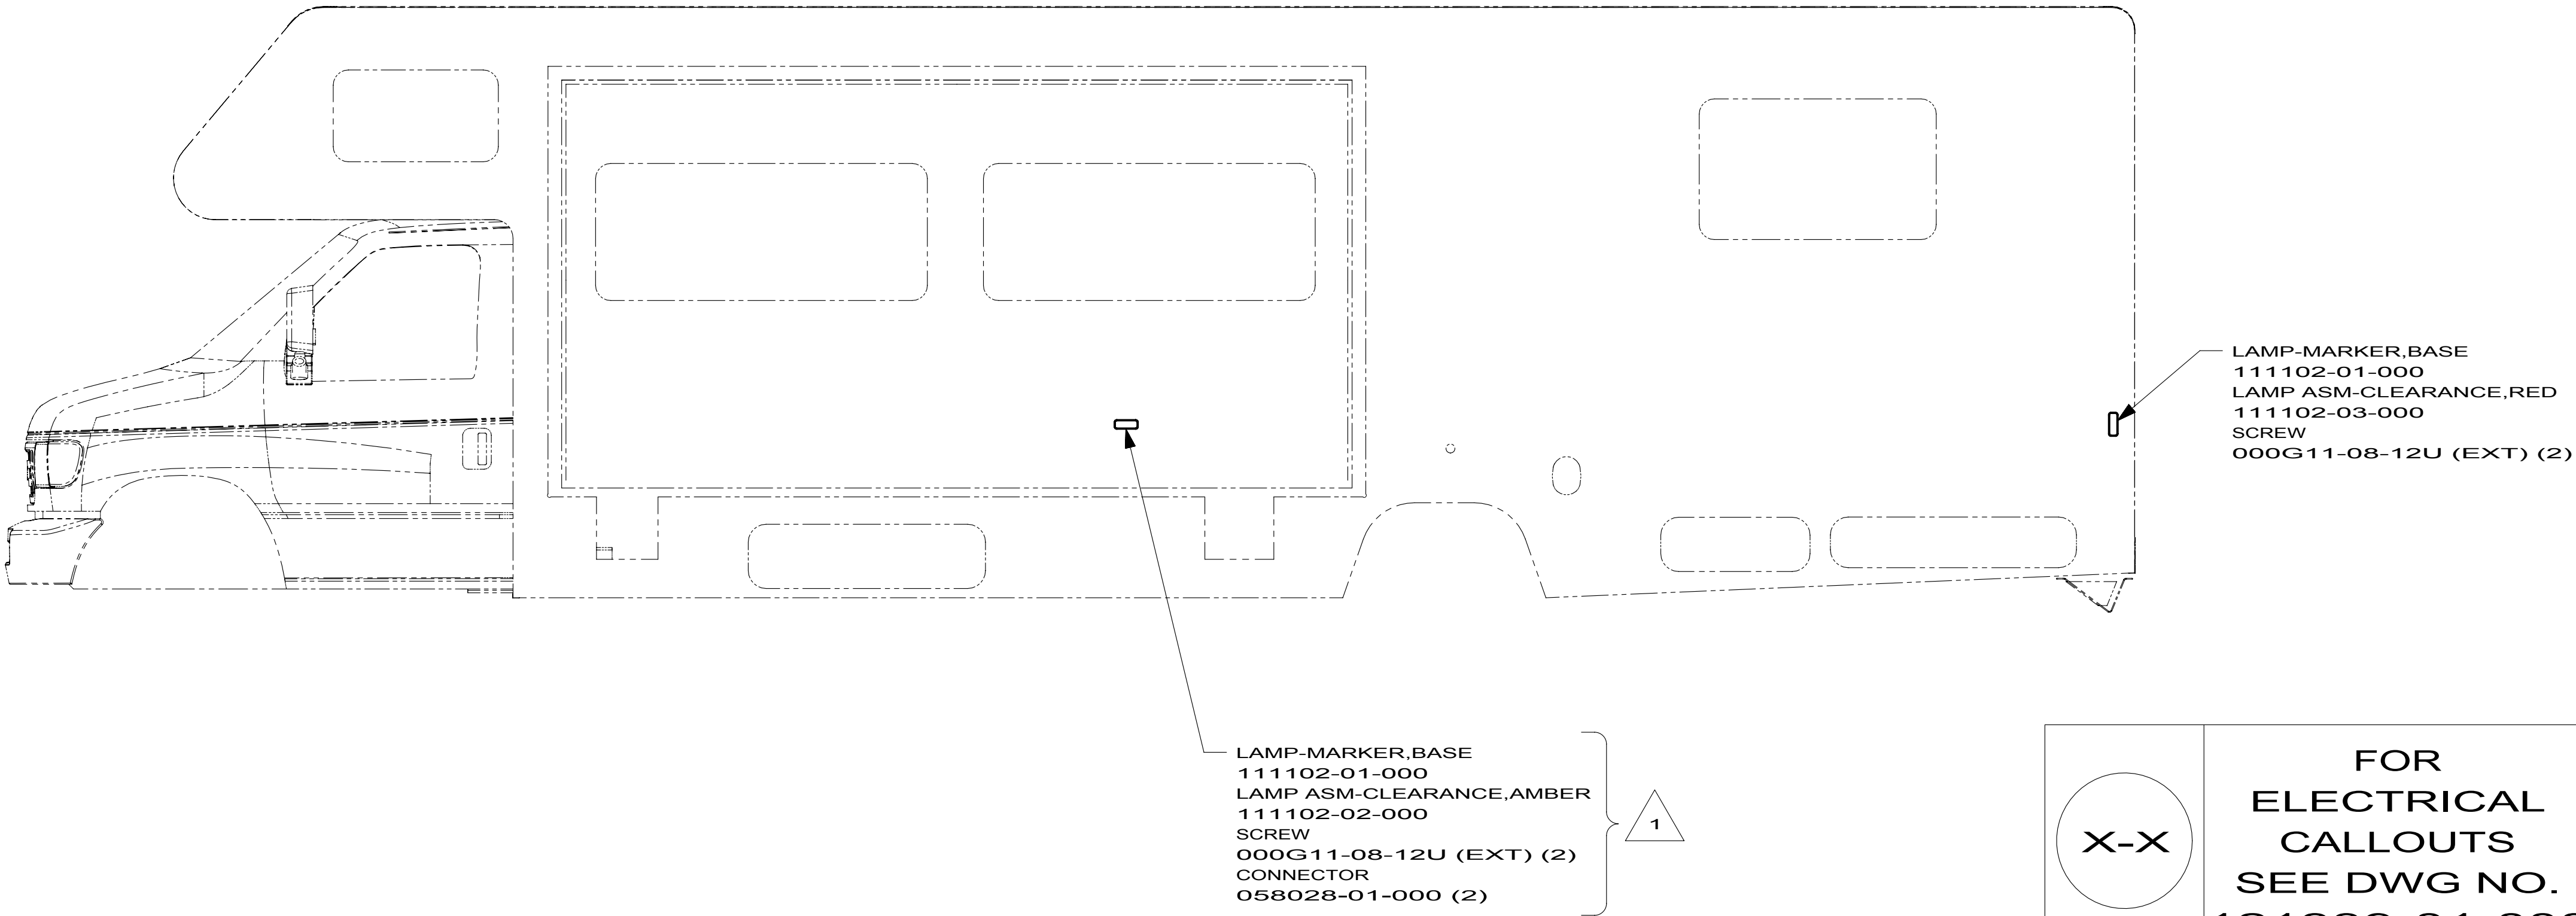
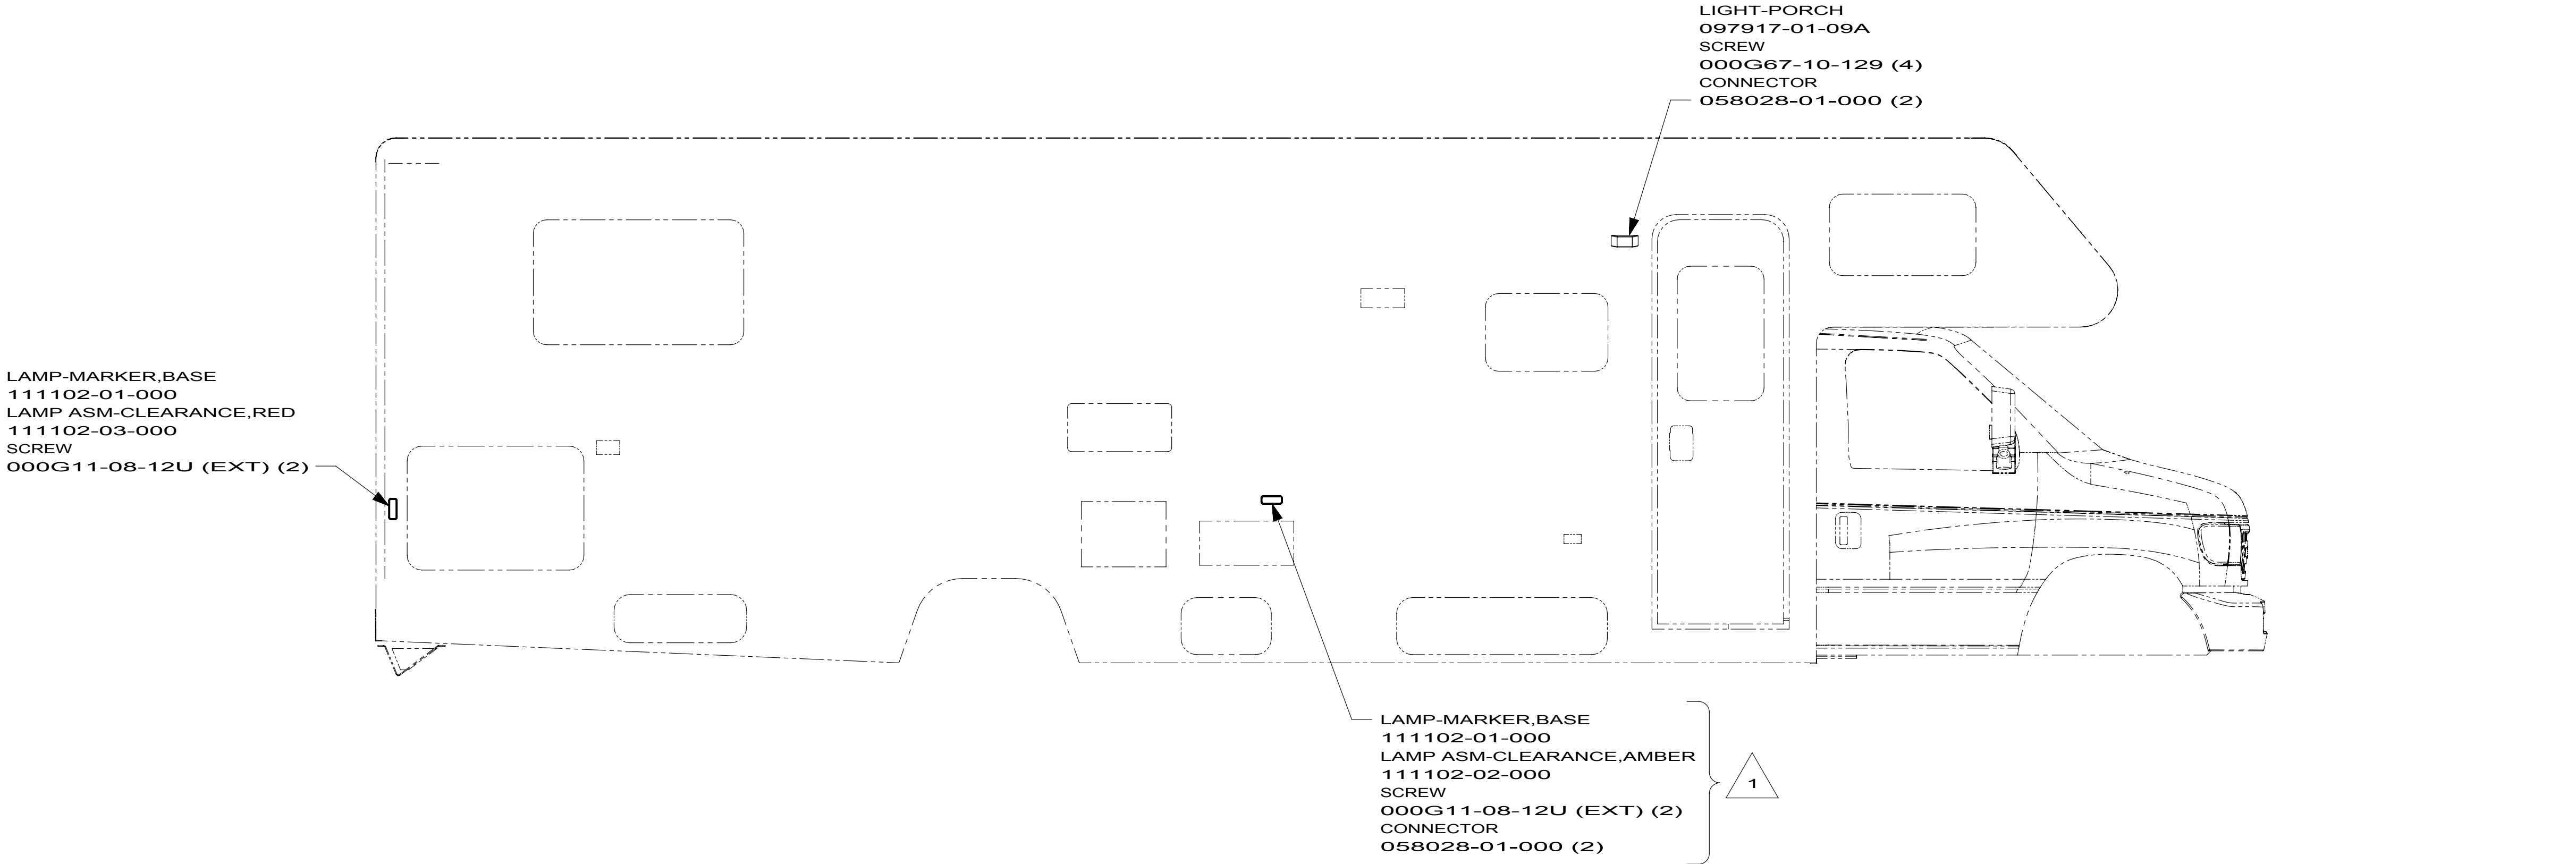
REV

87654321

↑

1

2/17/2010



- 265
- CODES/STANDARDS-CSA/CMVSS

1B1

 CODES/STANDARDS USA

1B1

265

X-X

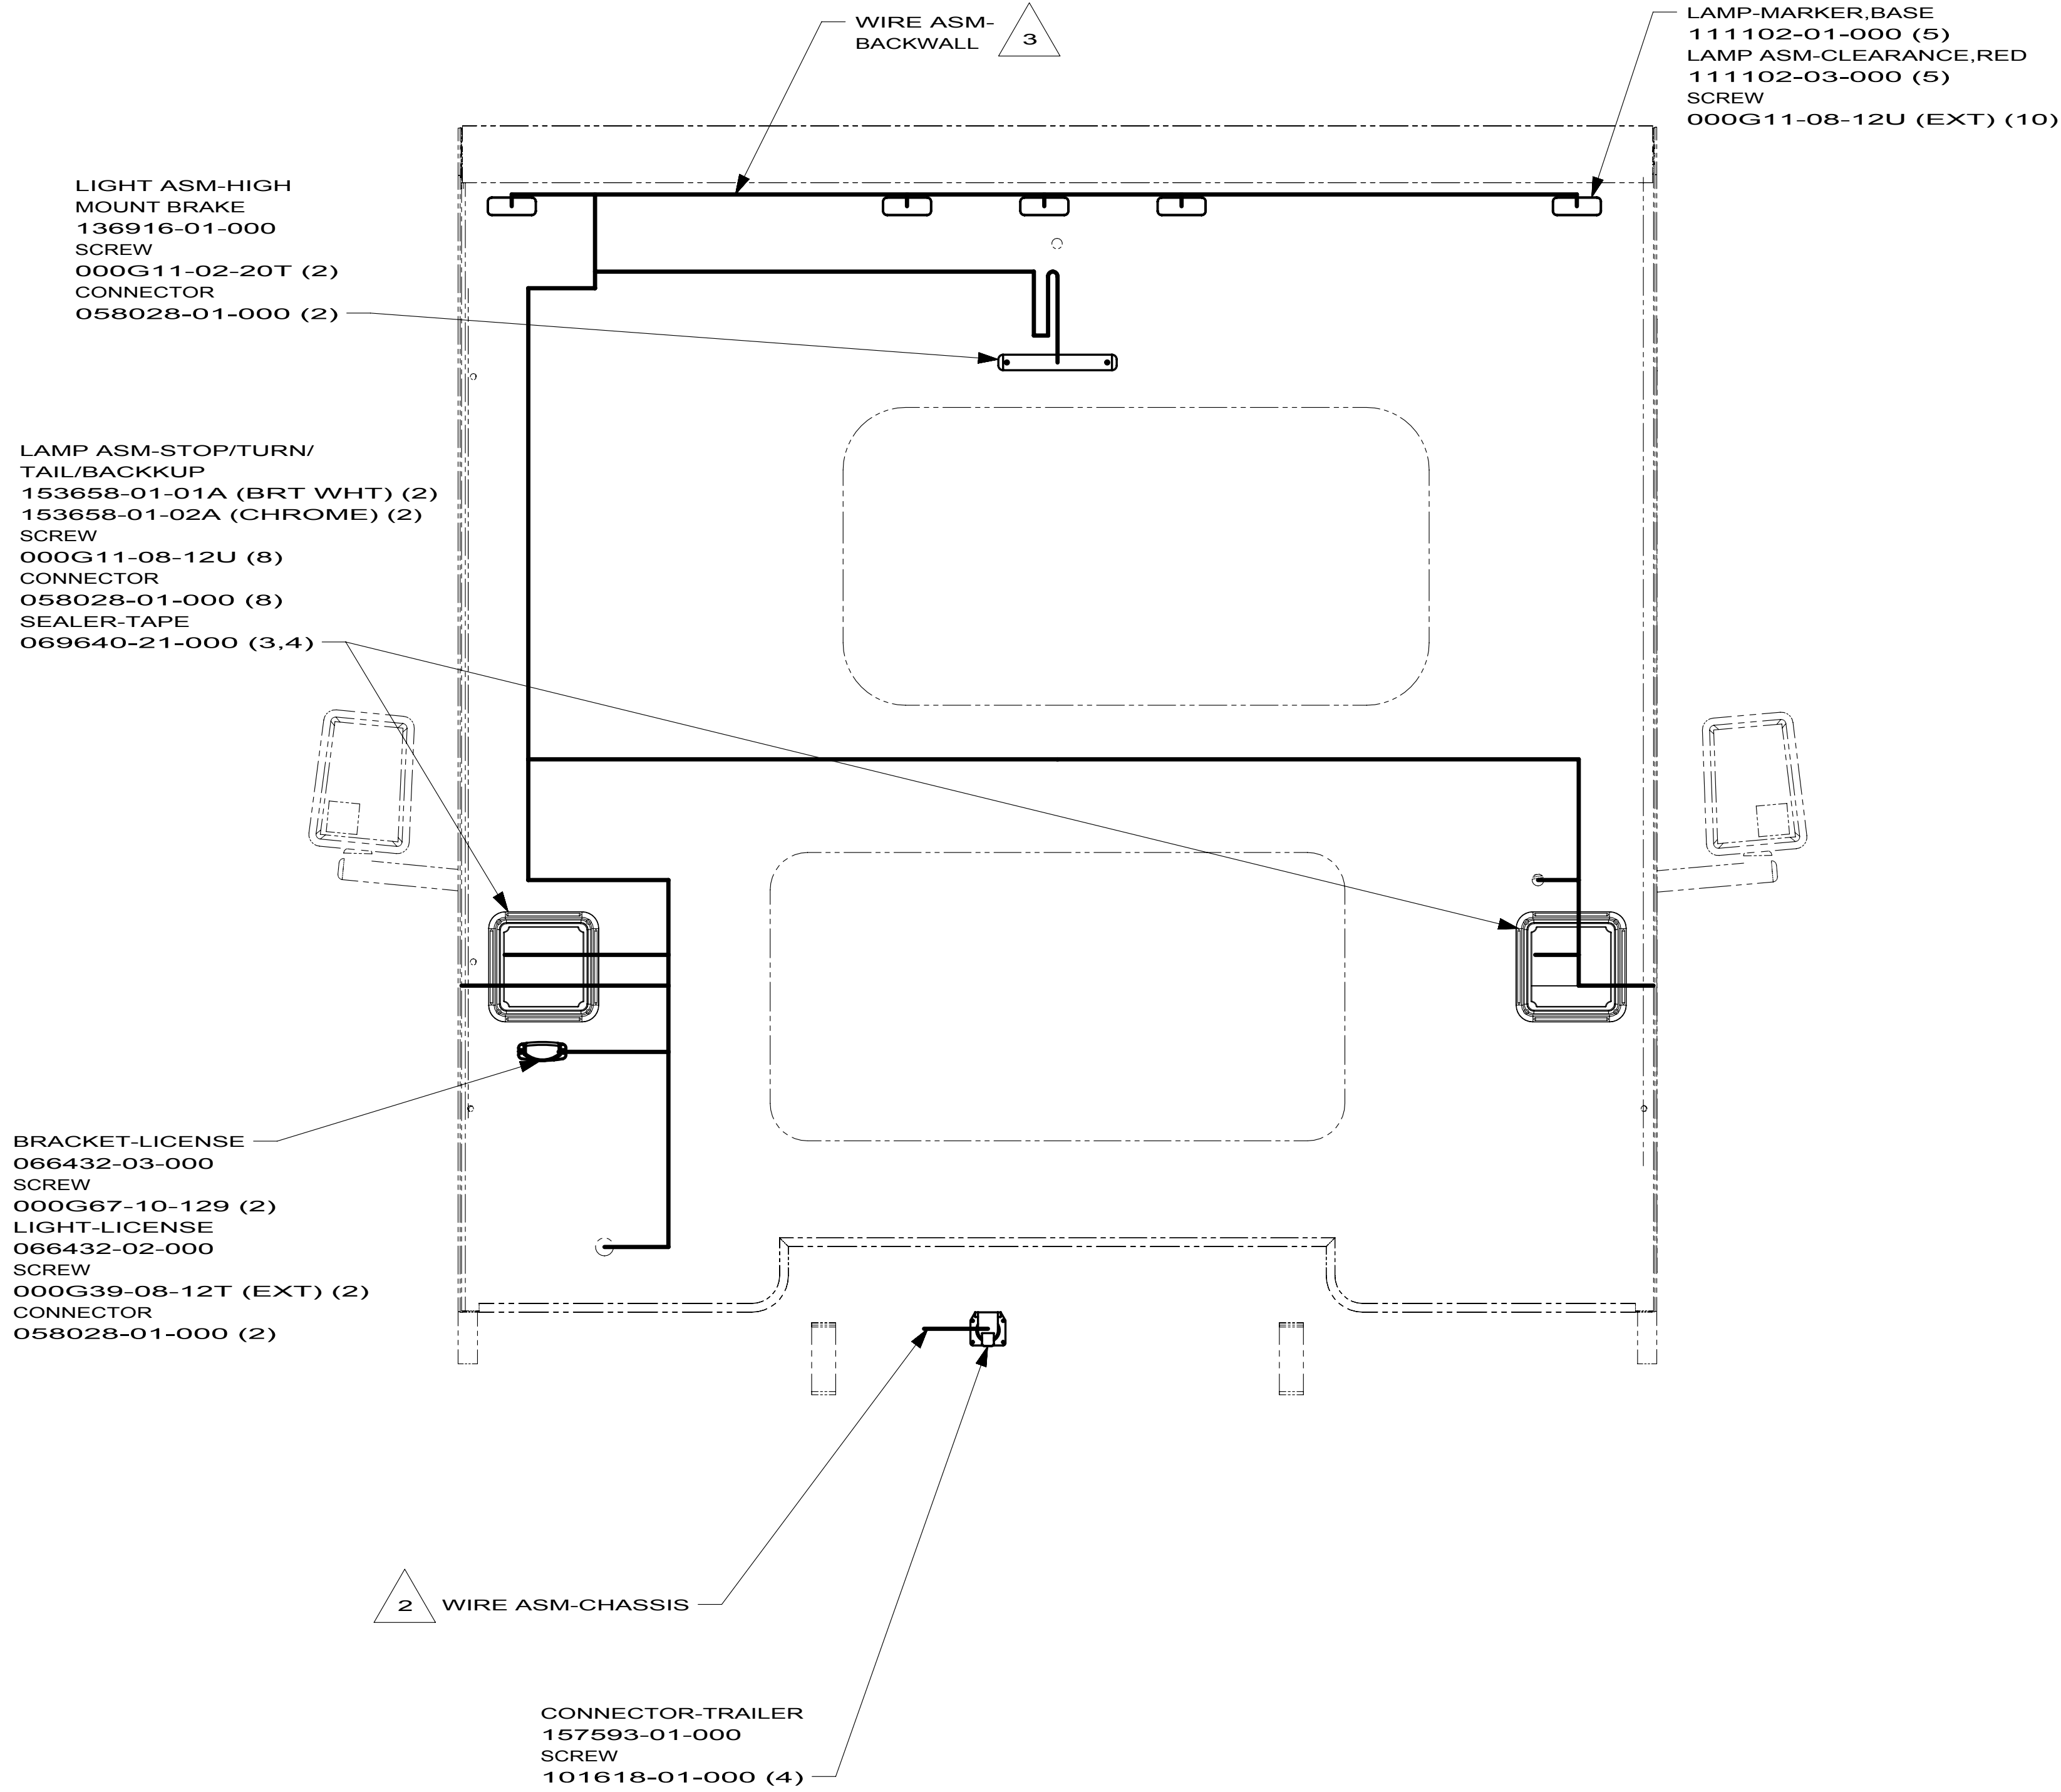
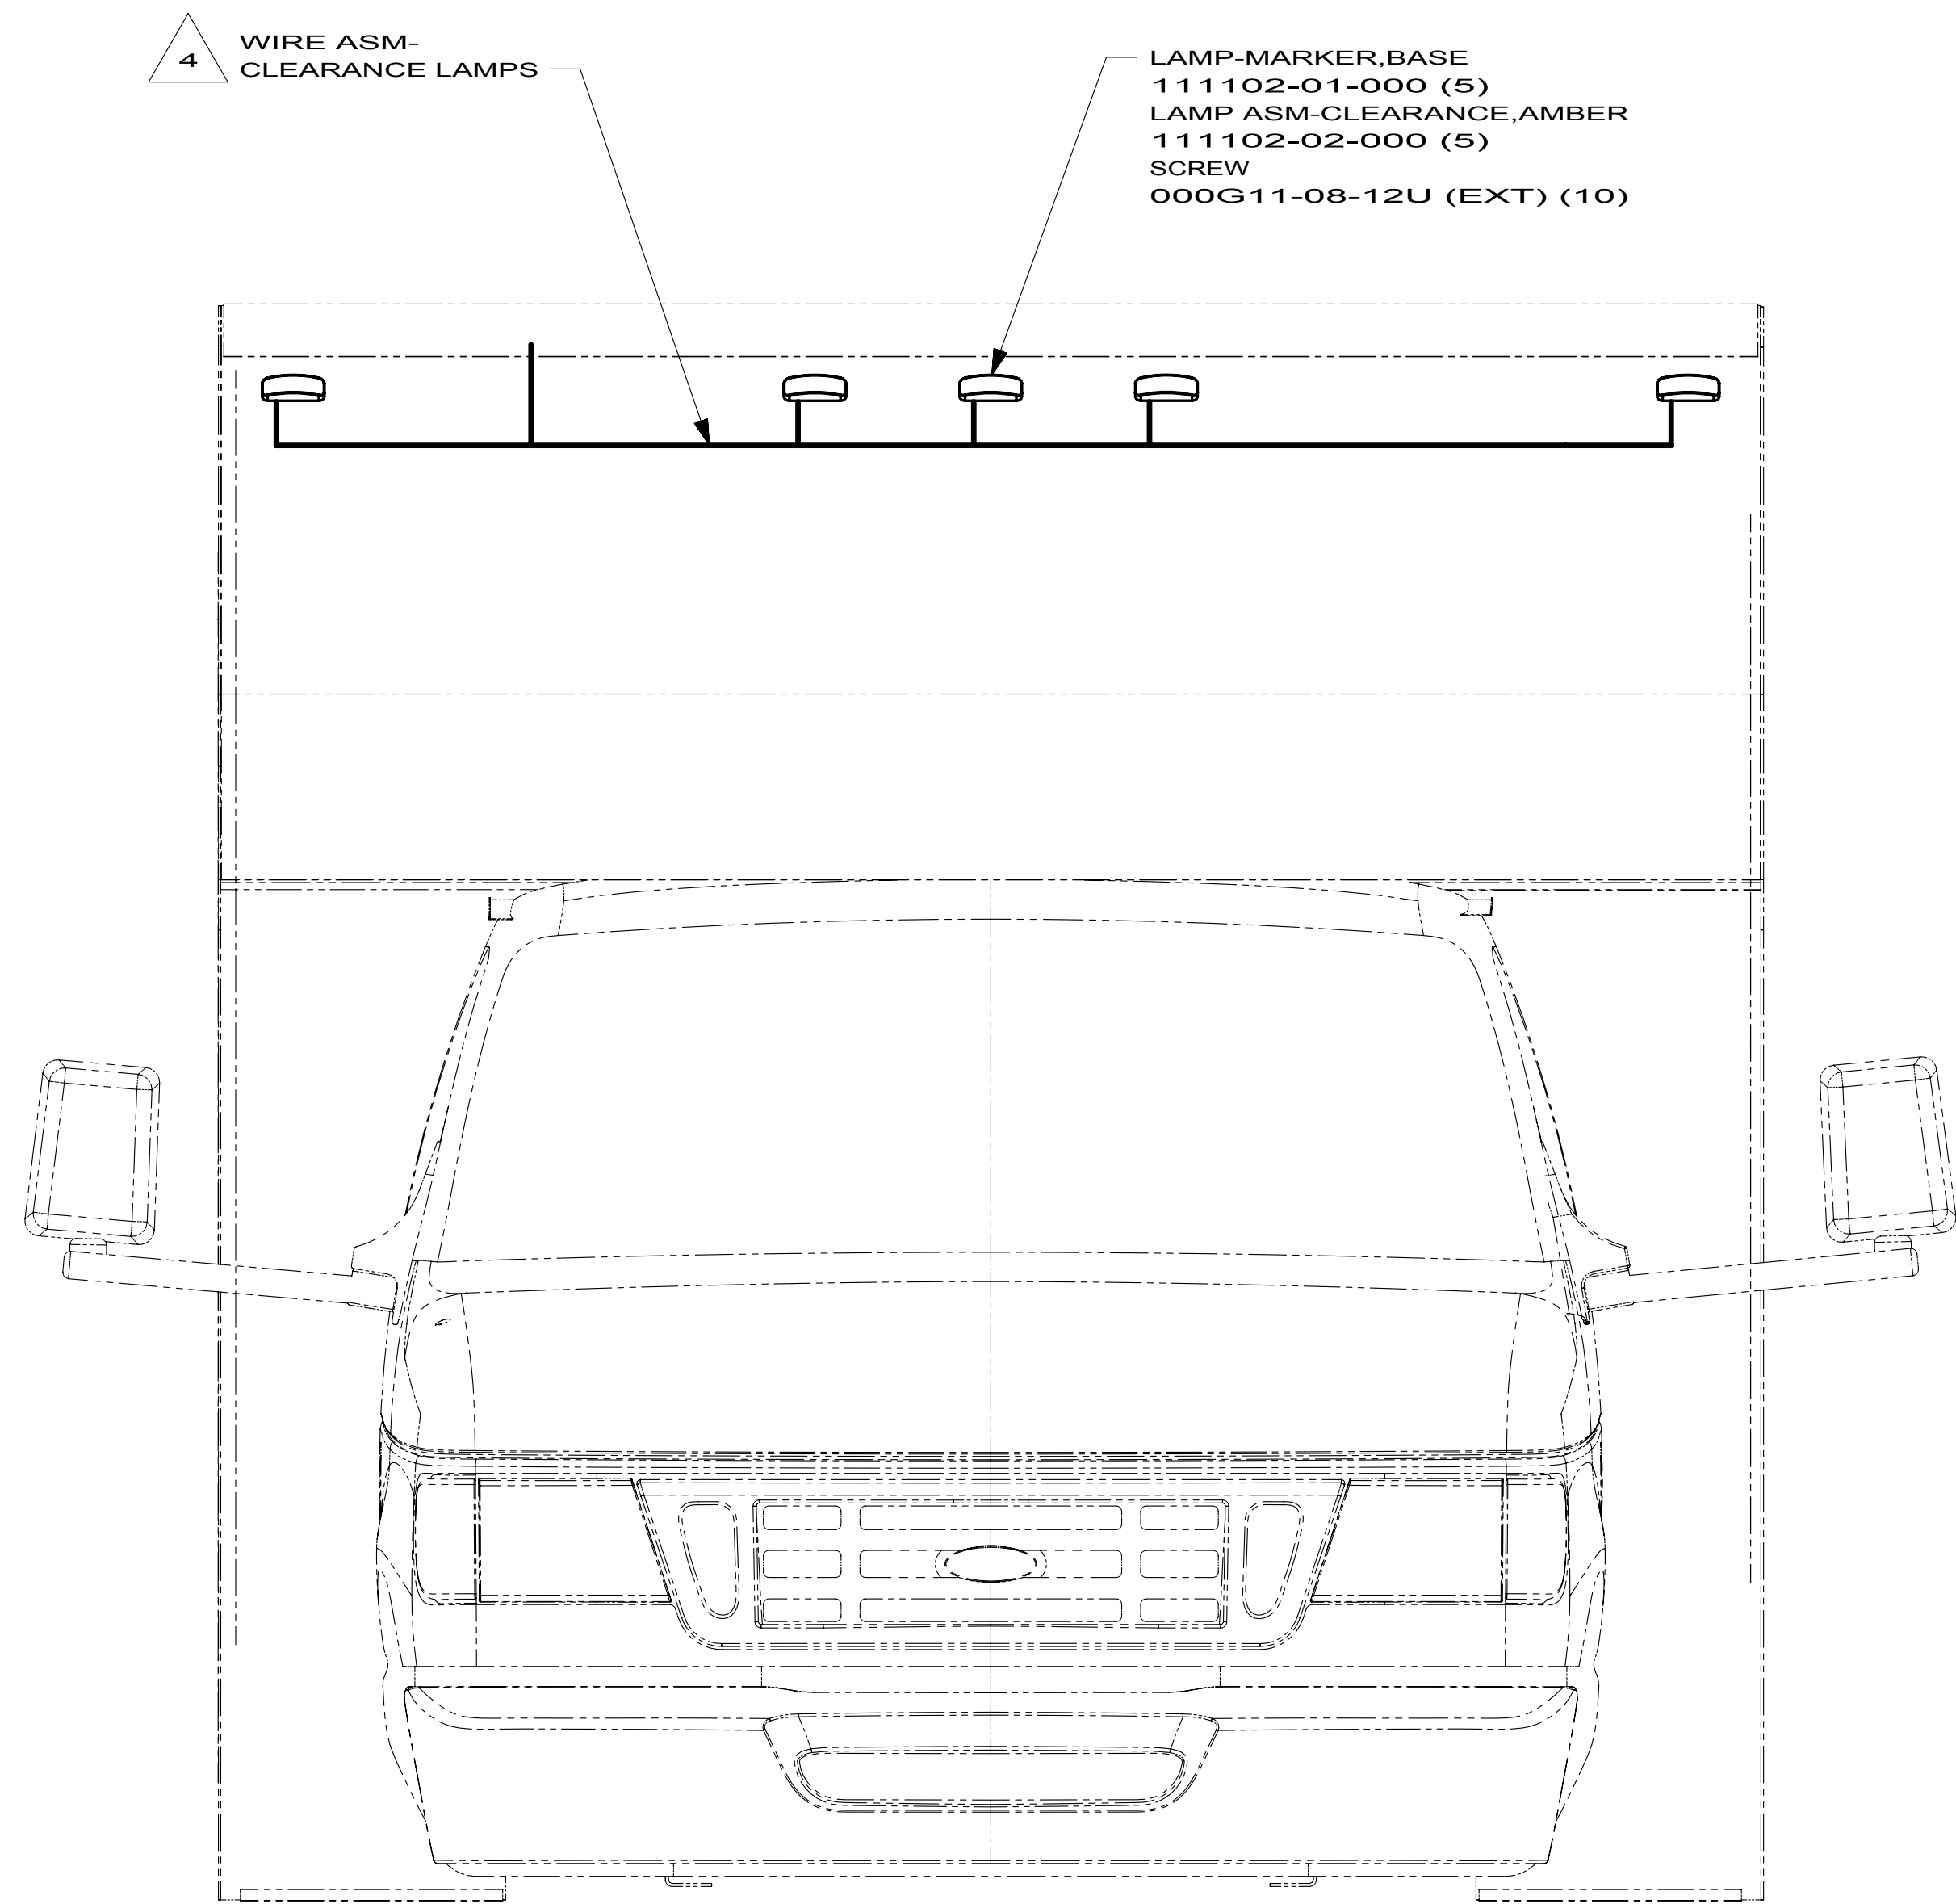
FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

10 200-SER

1 USED ONLY WITH 231C, 231J, 231N & 229T.

NOTES:



- 4 LOCATED IN ROOF ASM-FRONT.
- 3 LOCATED IN BACKWALL ASSEMBLY
- 2 SECURE WIRE BELOW COACH WITH CLAMP
010495-01-000 AND SCREW 000G67-10-12B.

1. CONNECTOR-PLUG,TRAILER 146246-01-000 TO BE SUPPLIED
LOOSE IN OWNERS PACKET WITH TRAILER TOW PACKAGE.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

10 200-SER

WIRING INSTL-EXTERIOR LAMPS

2

170016

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

KEY	PART NUMBER	U/M	DESCRIPTION
	097917-01-700	EA	LENS-LIGHT, CLEAR


097917-01-08A/09A
VENDOR NO.
30-78-021

KEY	PART NUMBER	U/M	DESCRIPTION
	153658-01-700	EA	LENS ONLY

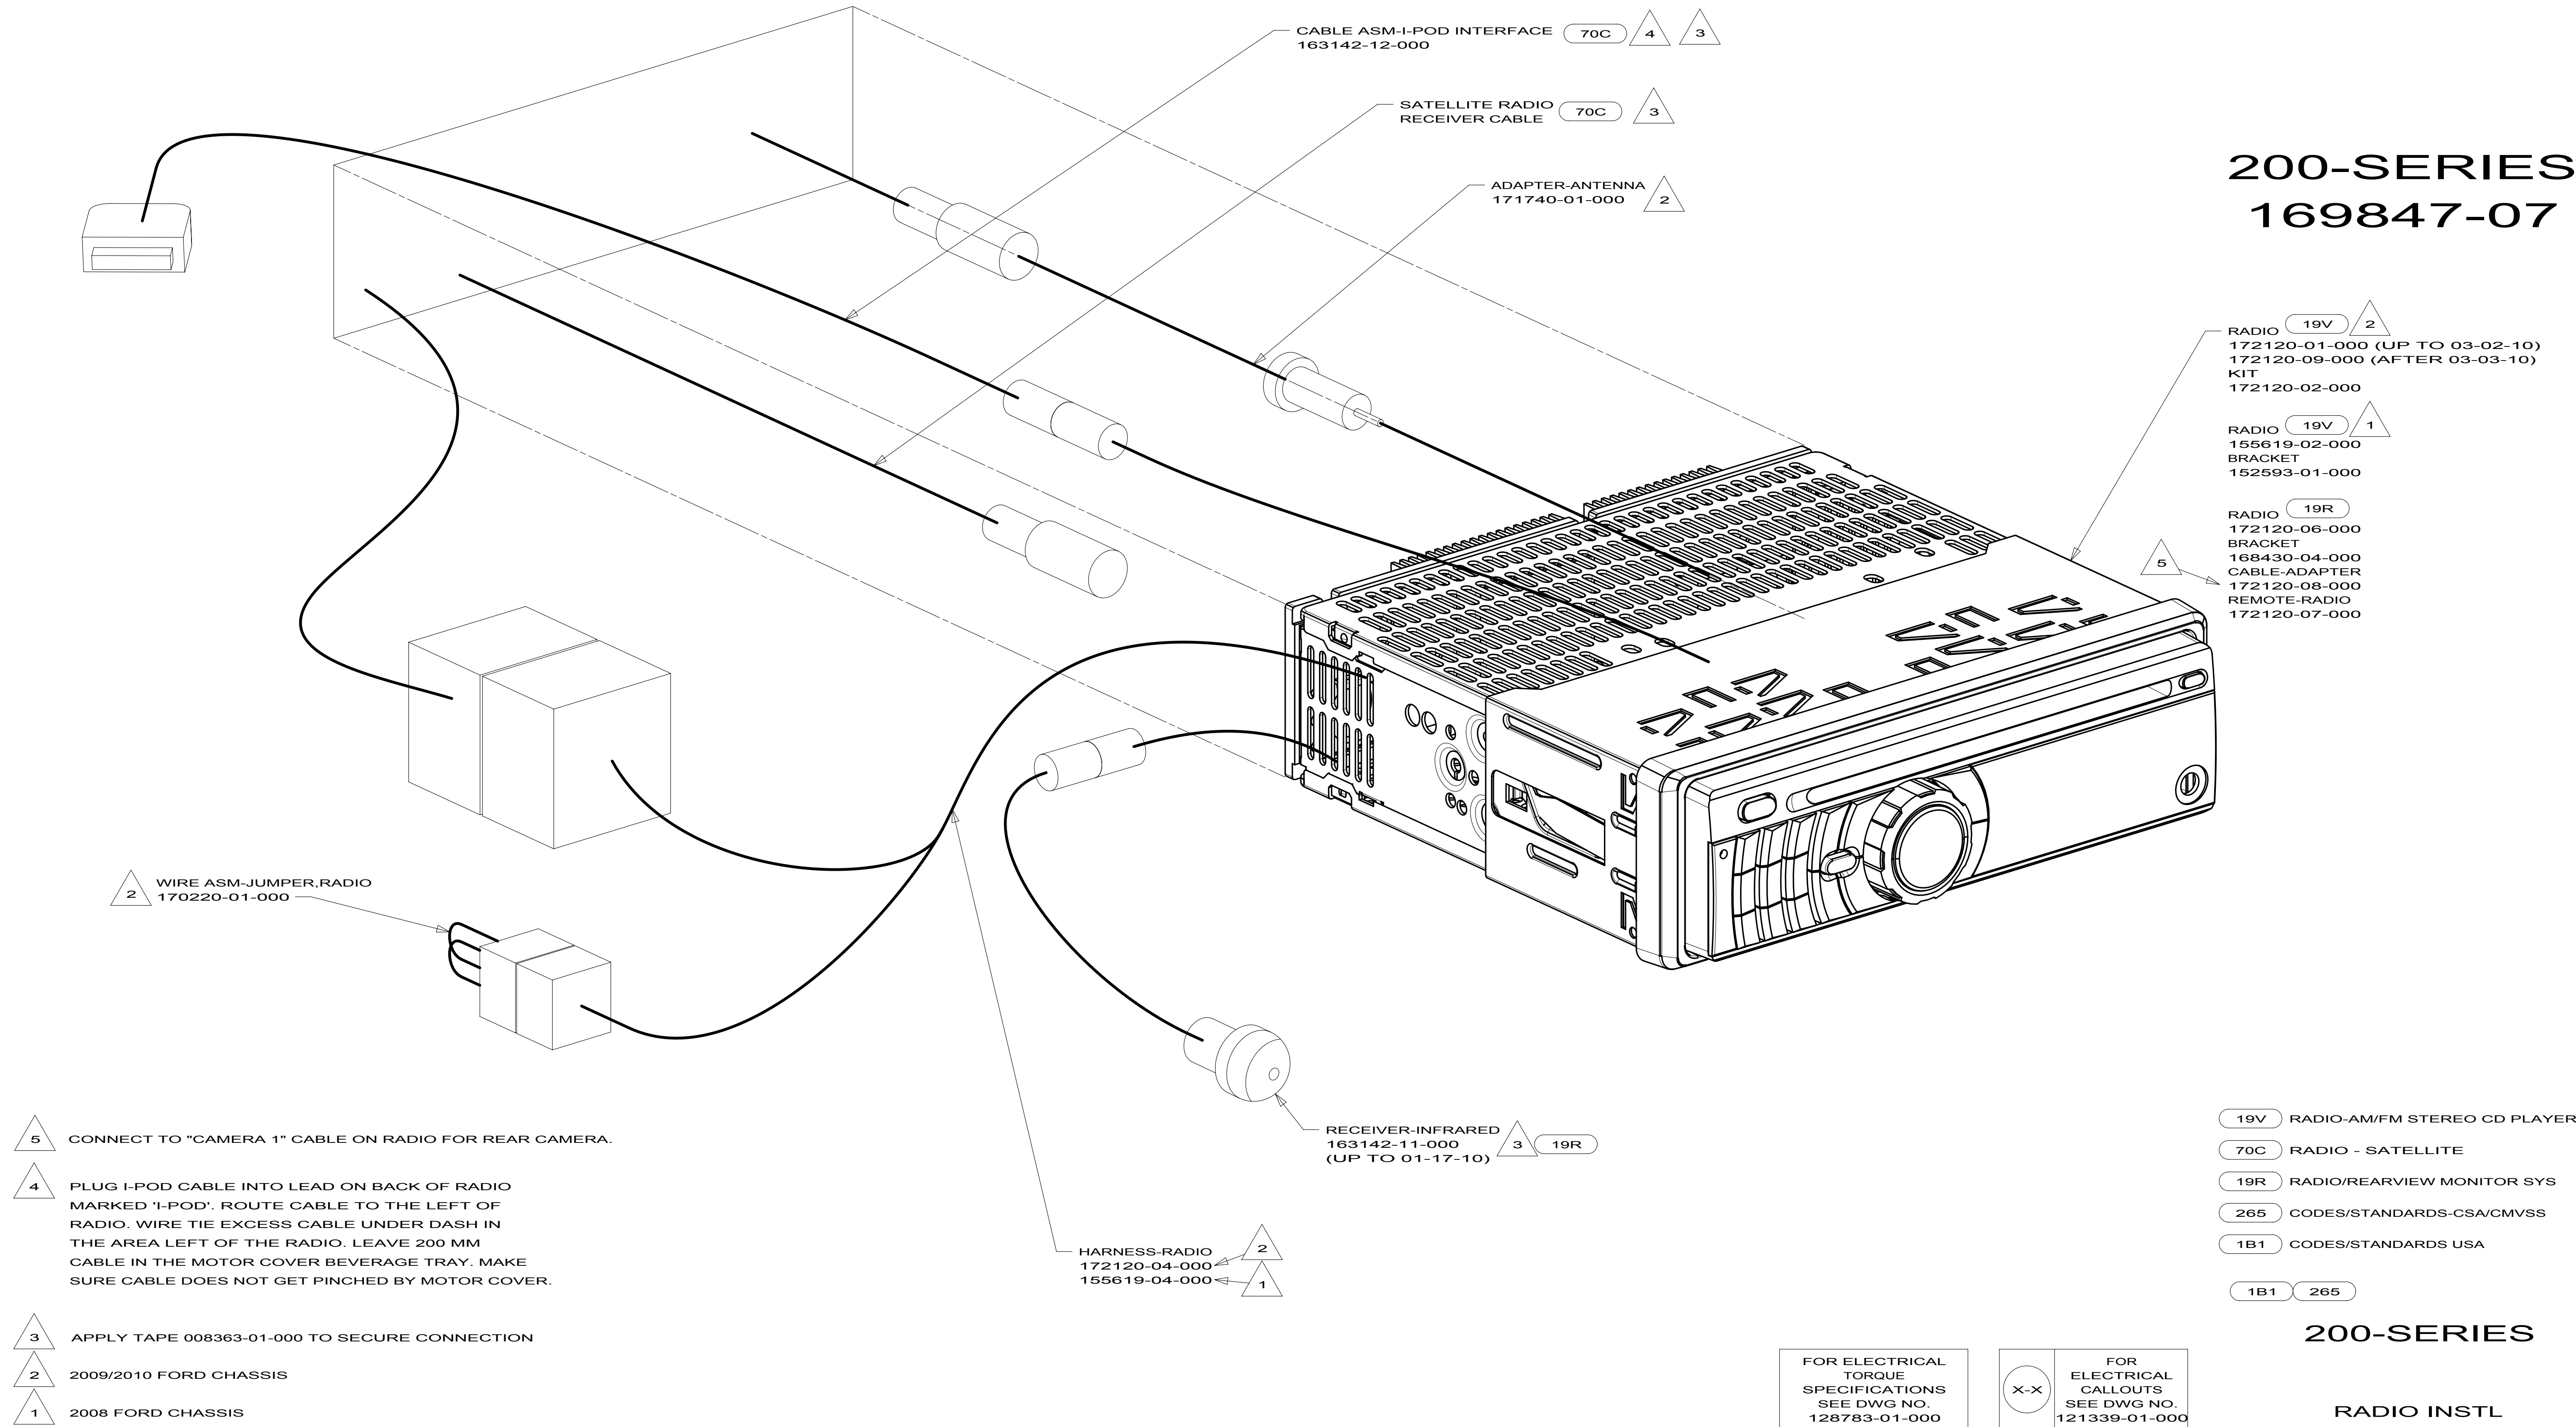
153658-01-01A, 153658-01-02A
VENDOR NO.
8511LRC




KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	172120-01-700	EA	REMOTE - RADIO	REMJC

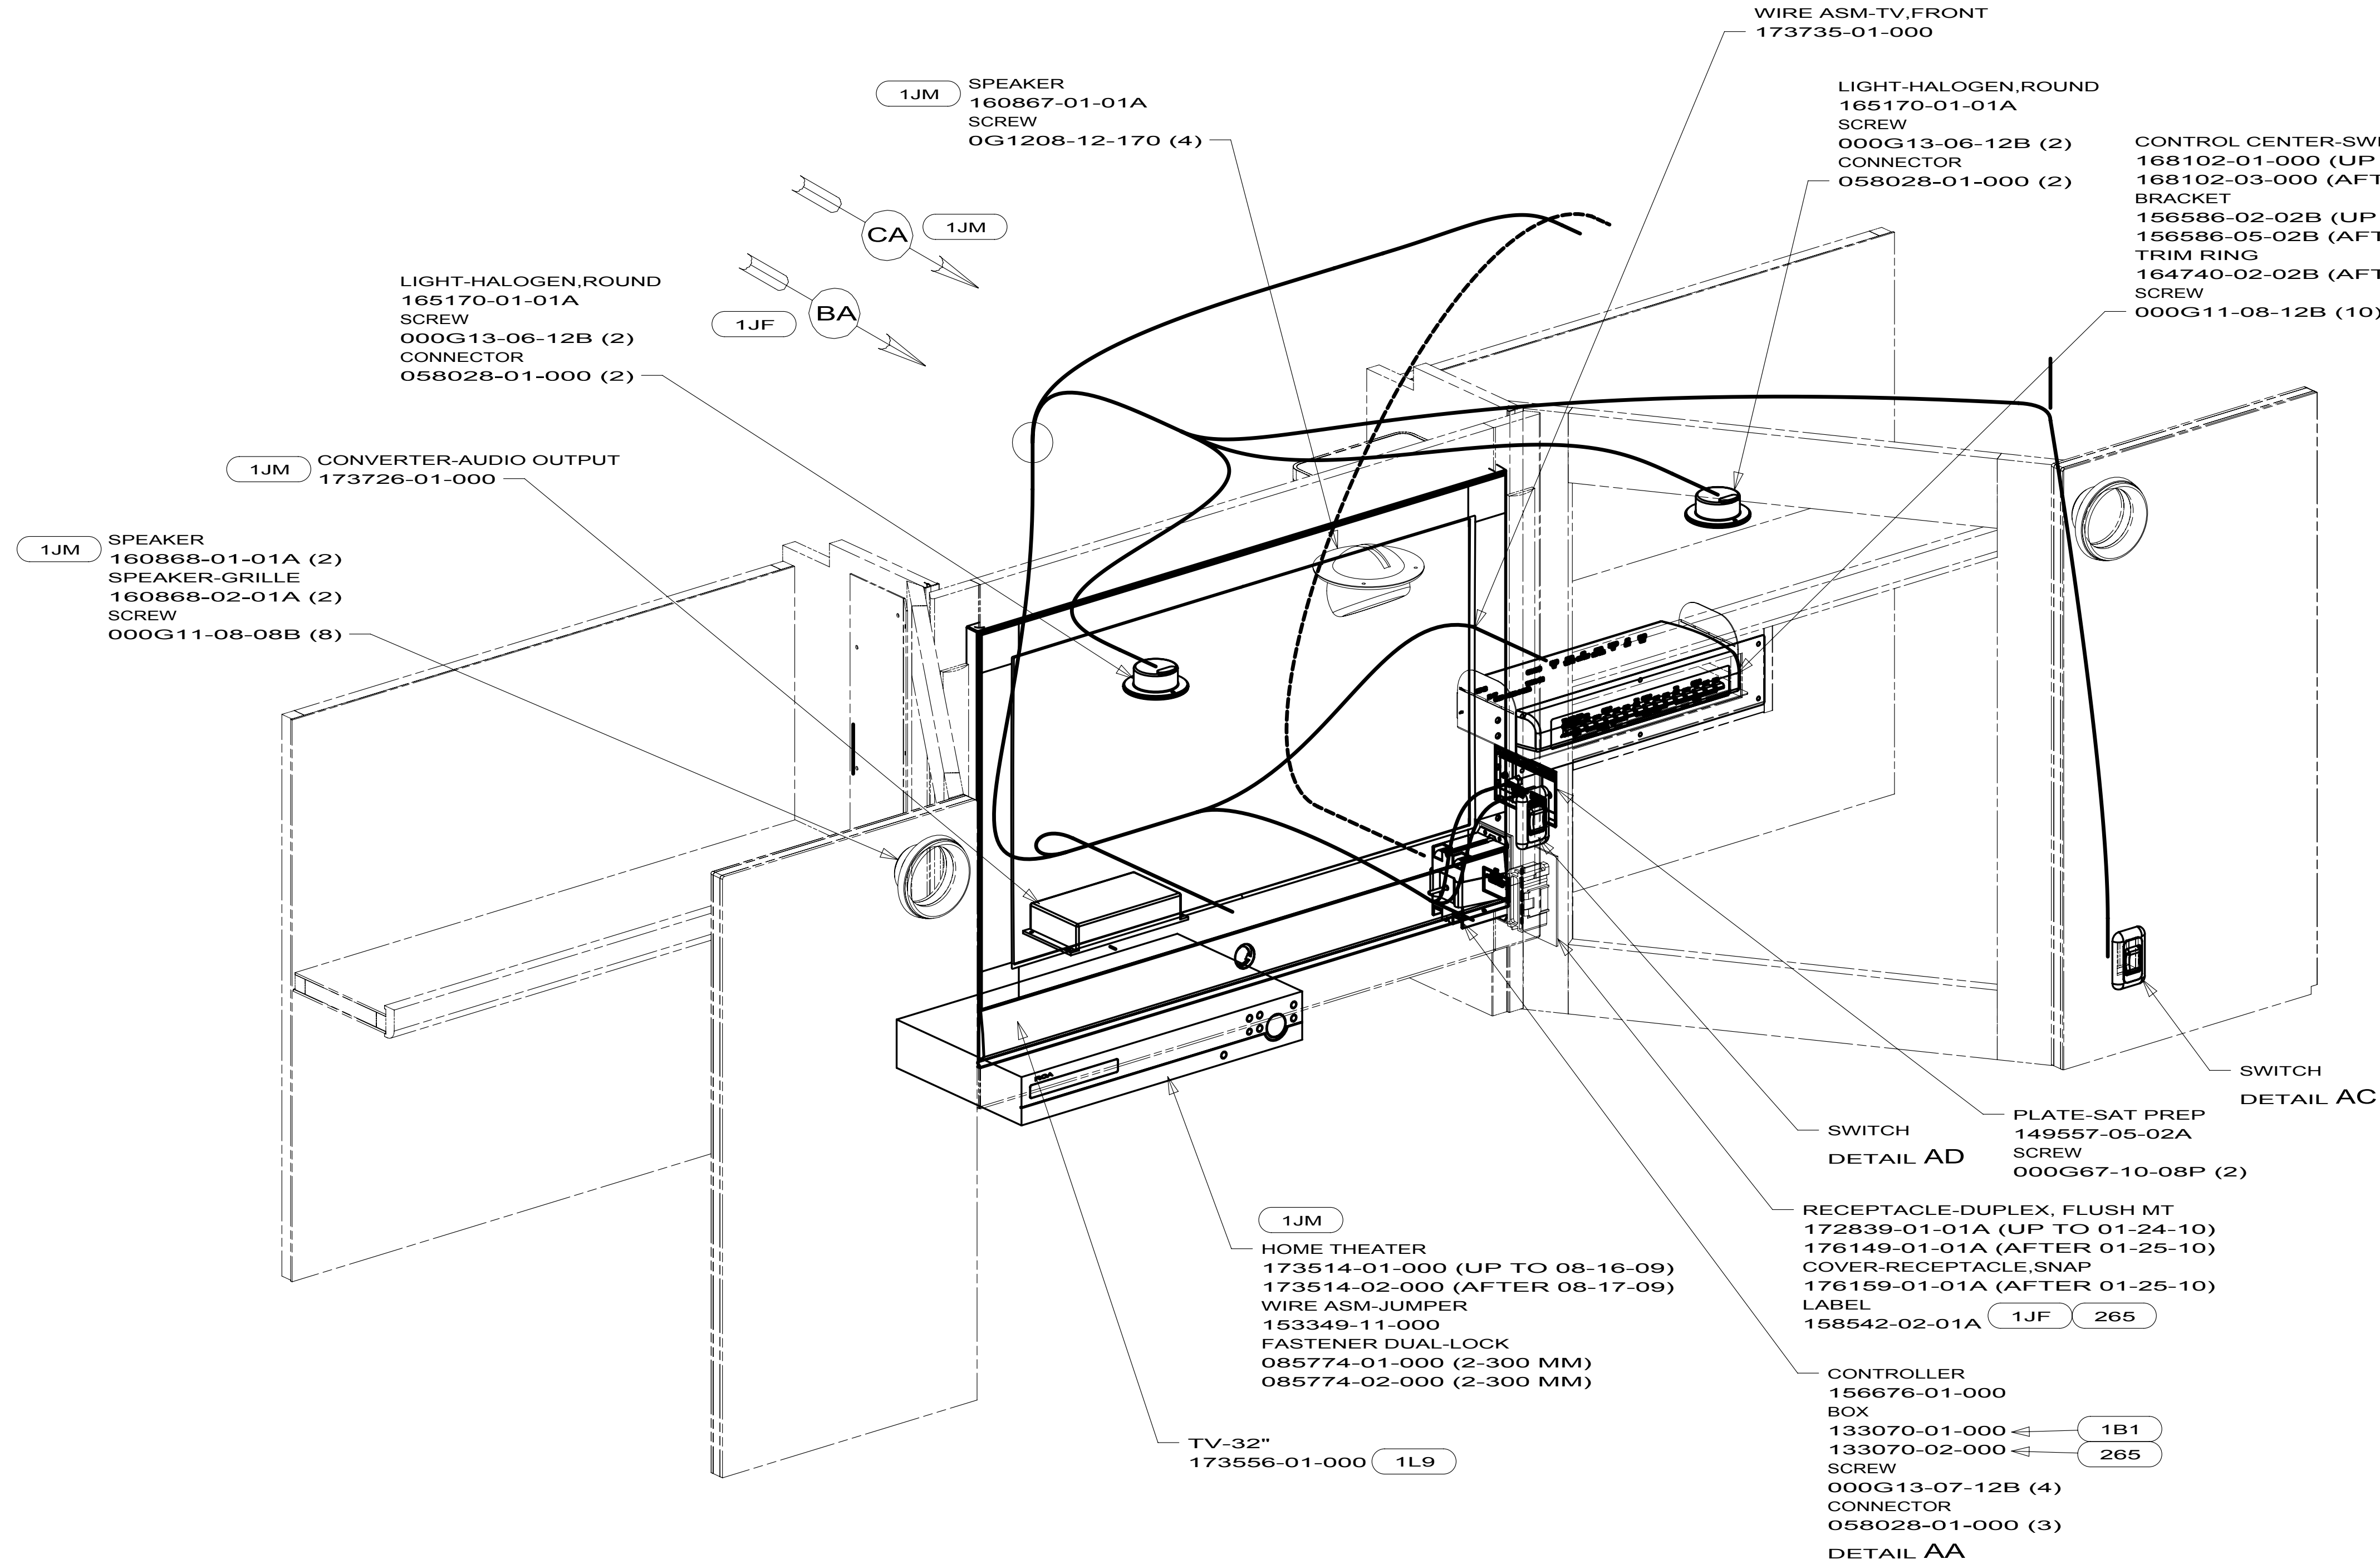

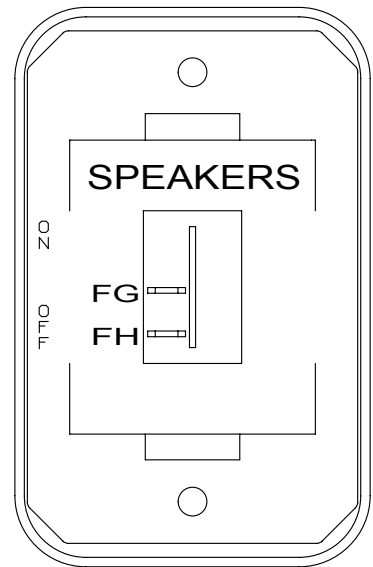
170112-01
170112-02
170112-03
170112-04
170112-05
200-SERIES



DETAIL AD 1JM

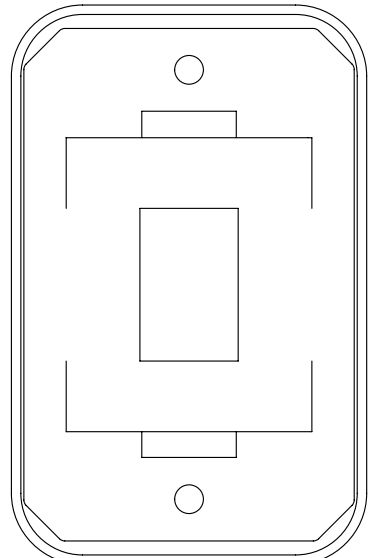

DETAIL AD 1JF

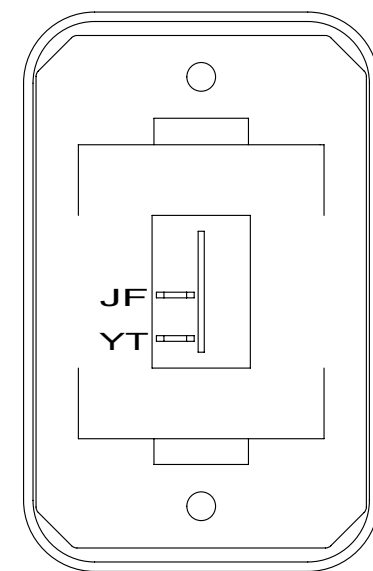

DETAIL AC

SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-60-02A
SCREW
000G11-08-08B (2)

SWITCH-BLANK
138253-01-02A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-01-01A
SCREW
000G11-08-08B (2)

SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-01-01A
SCREW
000G11-08-08B (2)

- 1JM HOME THEATER SOUND SYSTEM
1JF HOME THEATER SYS-WITHOUT
1L9 ENTERTAINMENT CENTER-CABOVER
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

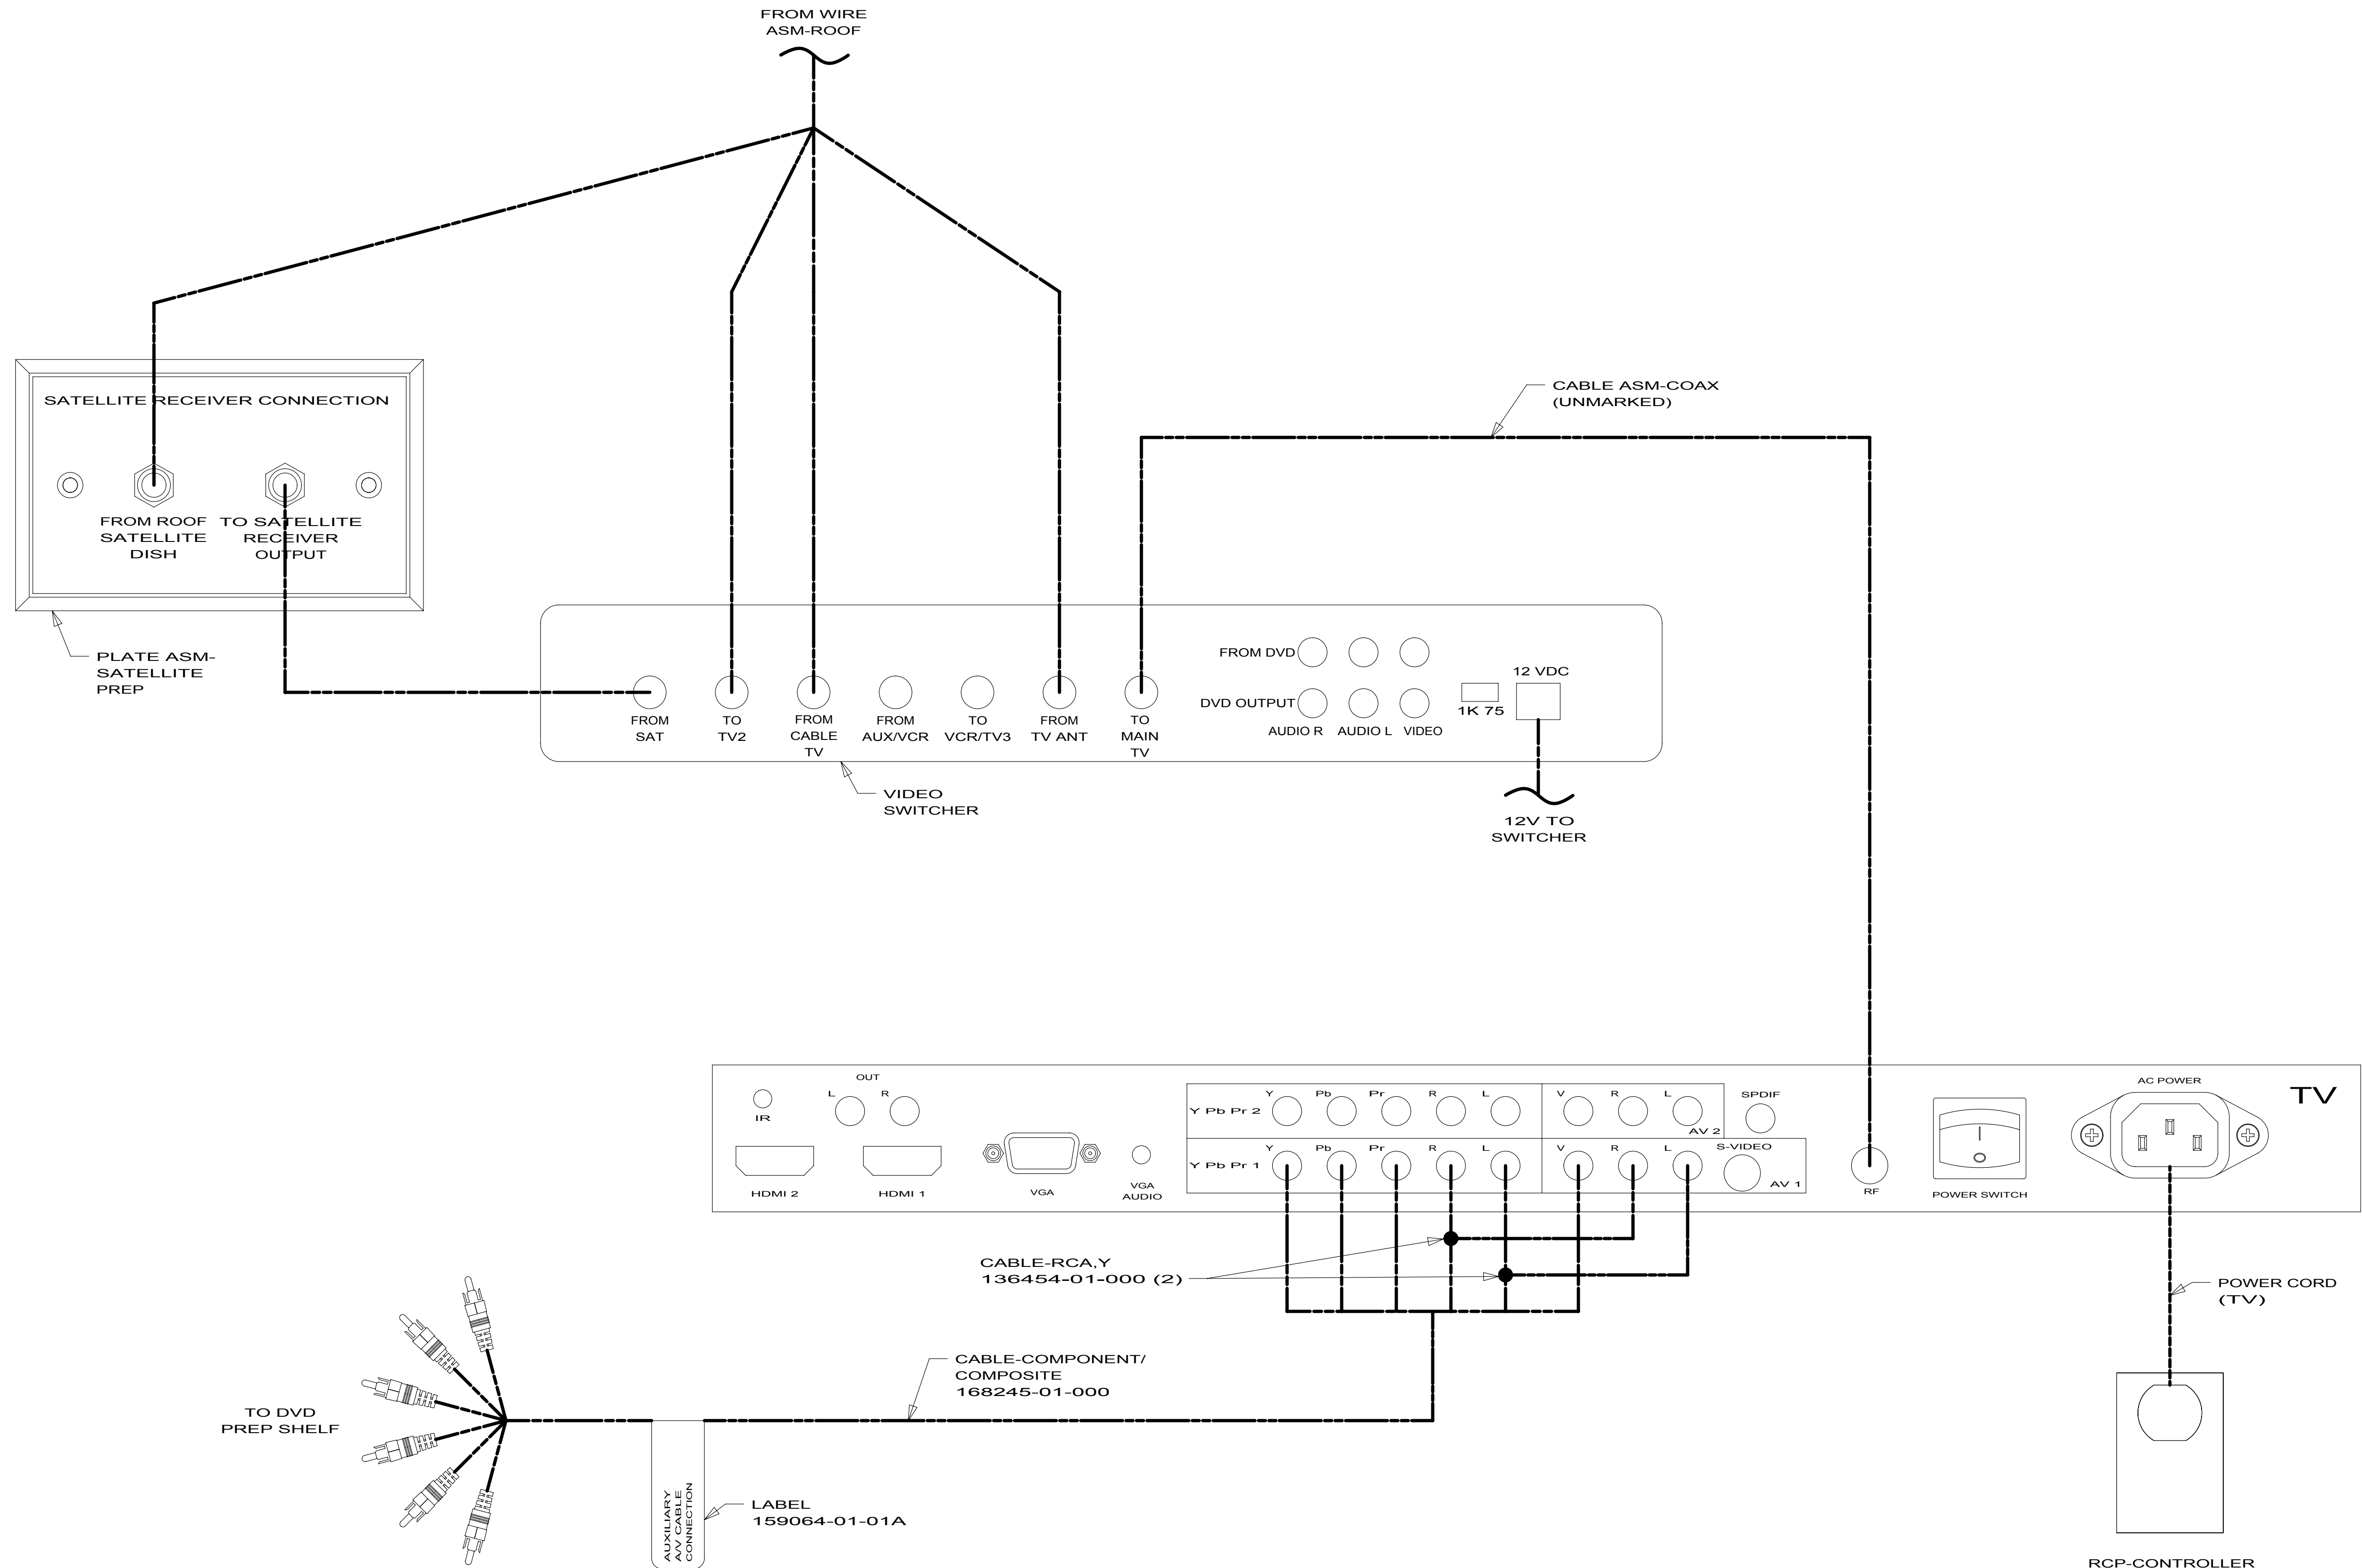
3. ALL WIRES TO BE SECURED WITH CLAMP 010495-01-000 OR CLIP 080734-01-000 EVERY 600MM. USE SCREW 000G67-10-12B UNLESS OTHERWISE SPECIFIED.
2. 110V WIRE TO BE CLAMPED WITH CLAMP 010497-05-000 WITHIN 200MM OF OUTLET BOXES. USE SCREW 000G67-10-12B.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

WIRING INSTL-TV/DVD
1 170112



DETAIL BA

1L9 1JF

170112-01

170112-02

170112-03

170112-04

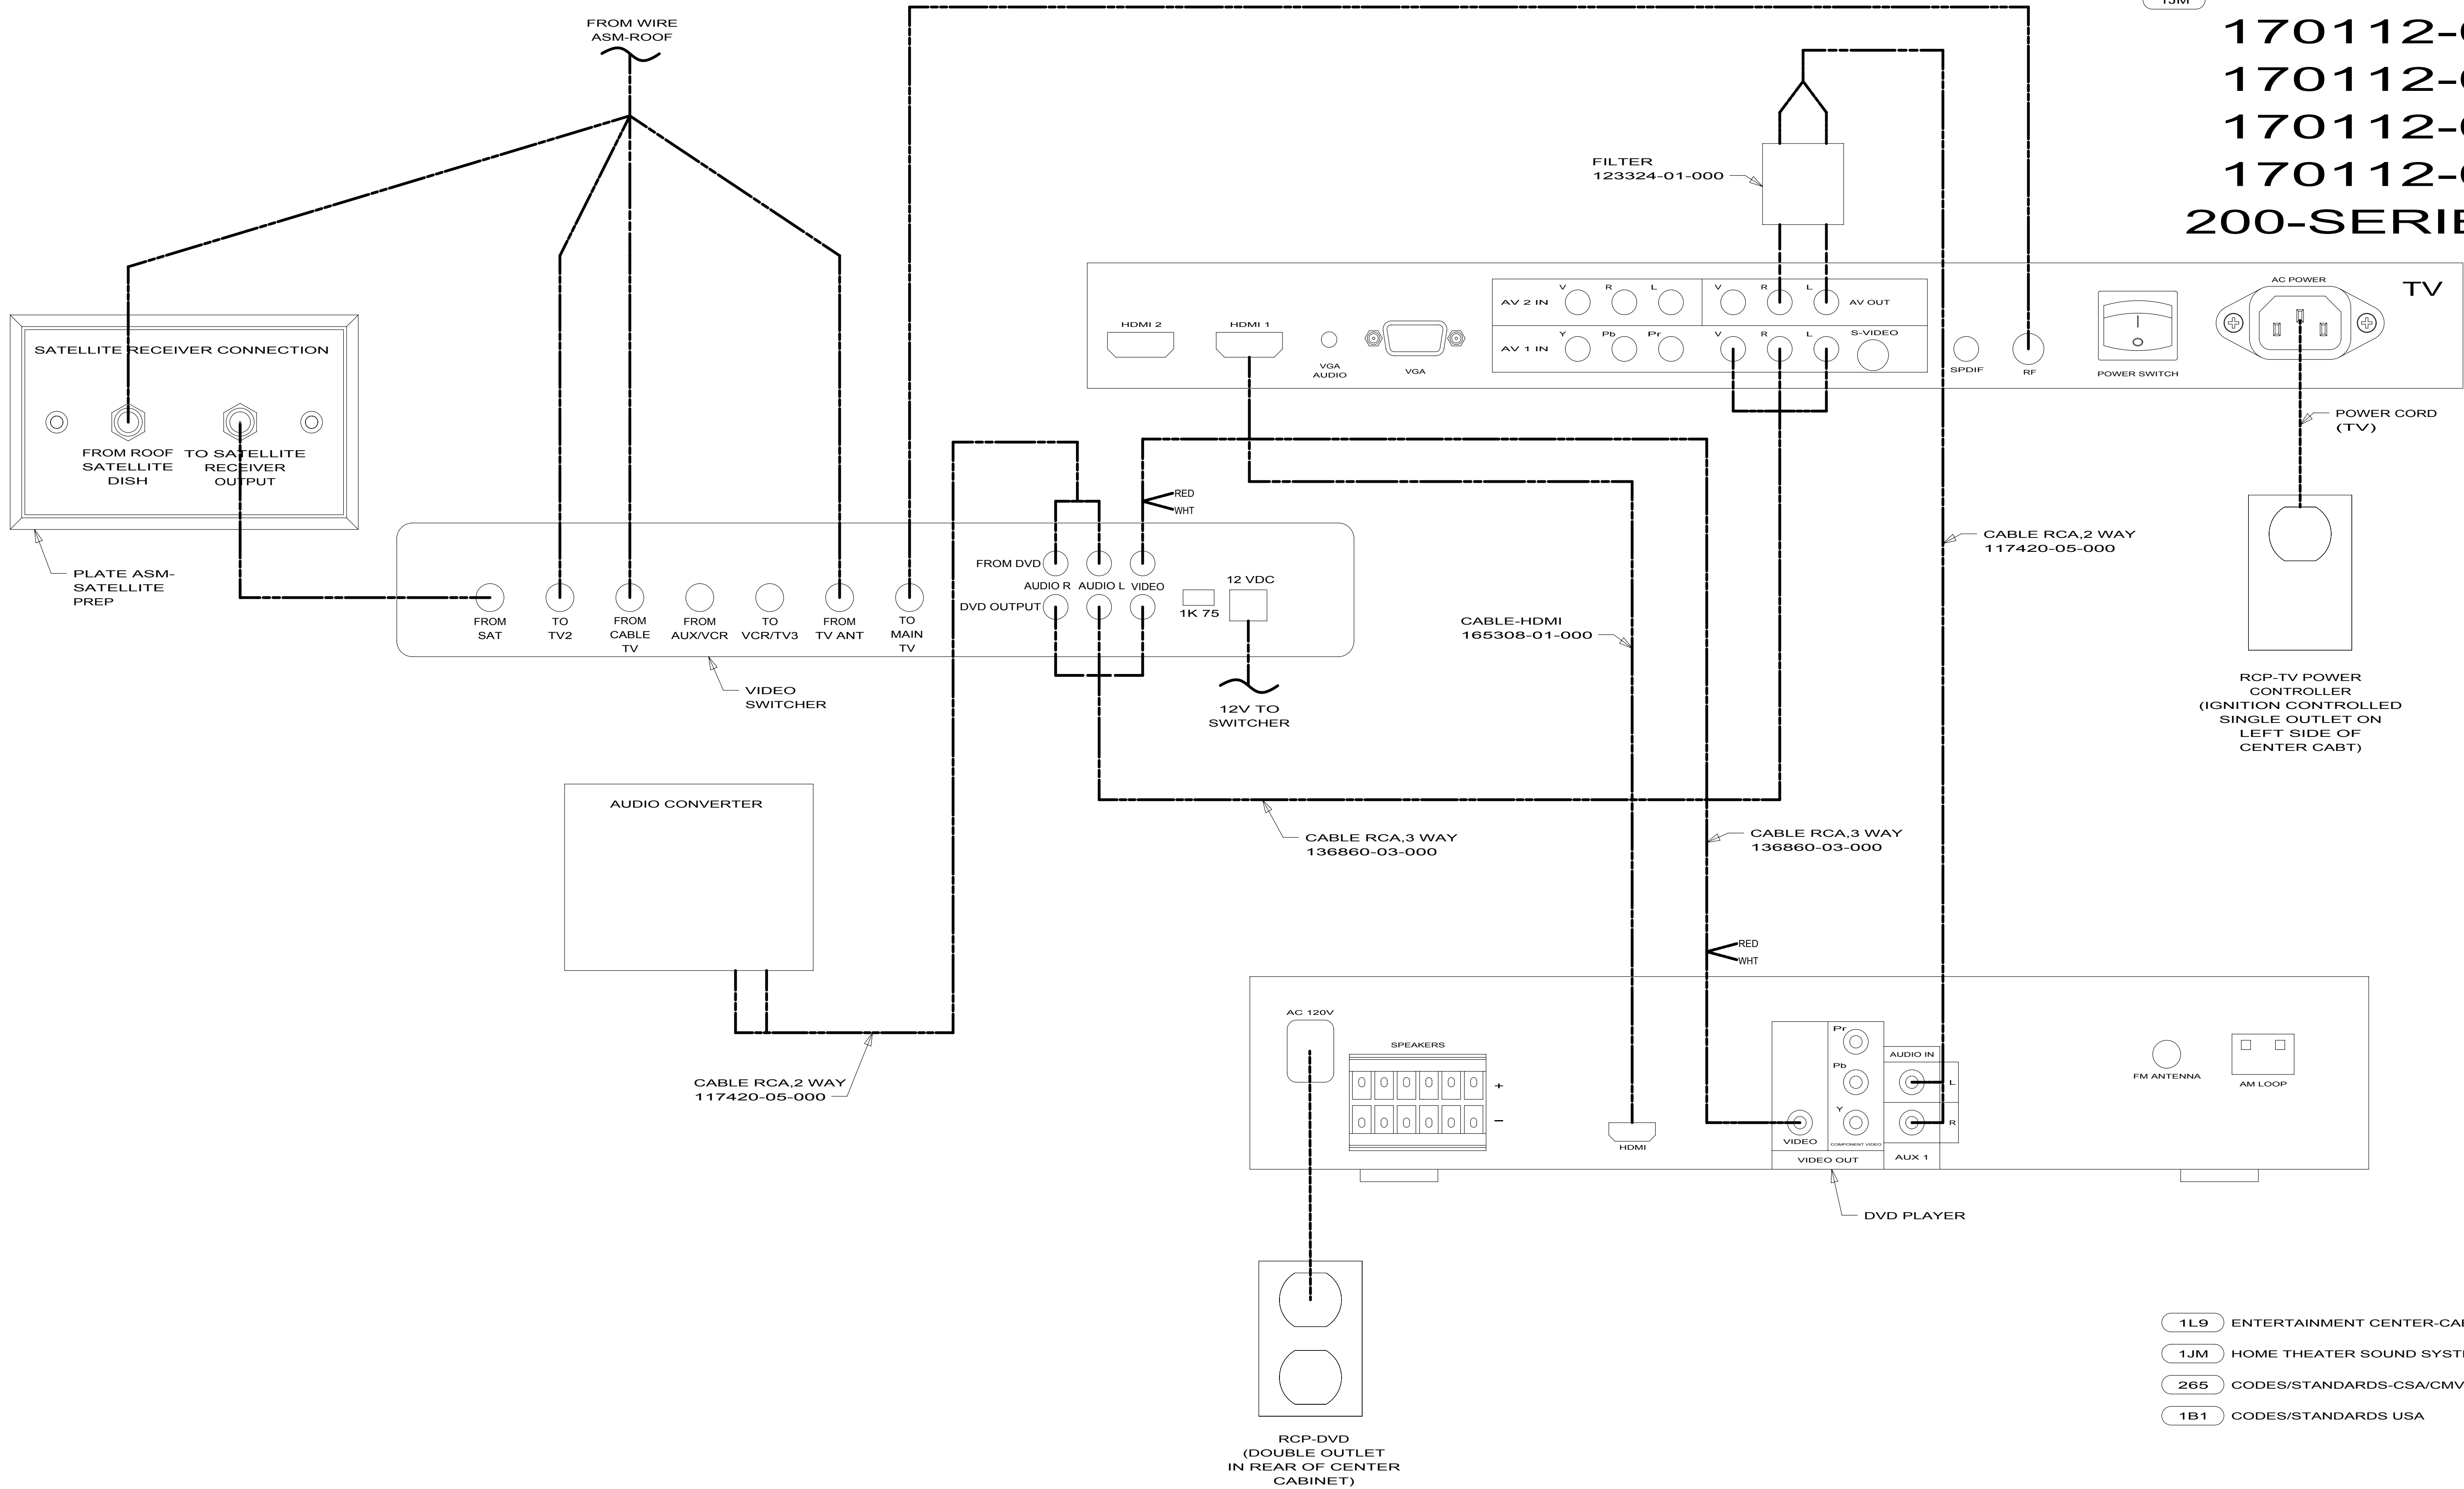
170112-05

200-SERIES

- 1L9 ENTERTAINMENT CENTER-CABOVER
- 1JF HOME THEATER SYS-WITHOUT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



170112-01
170112-02
170112-03
170112-04
170112-05
200-SERIES

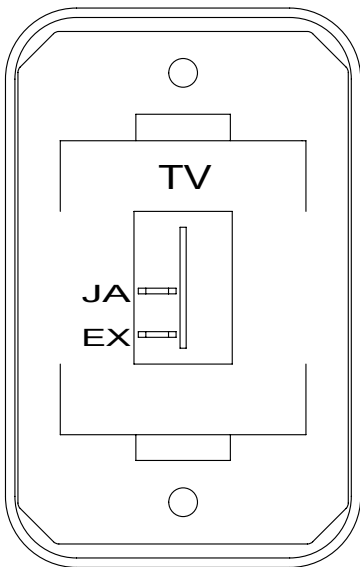
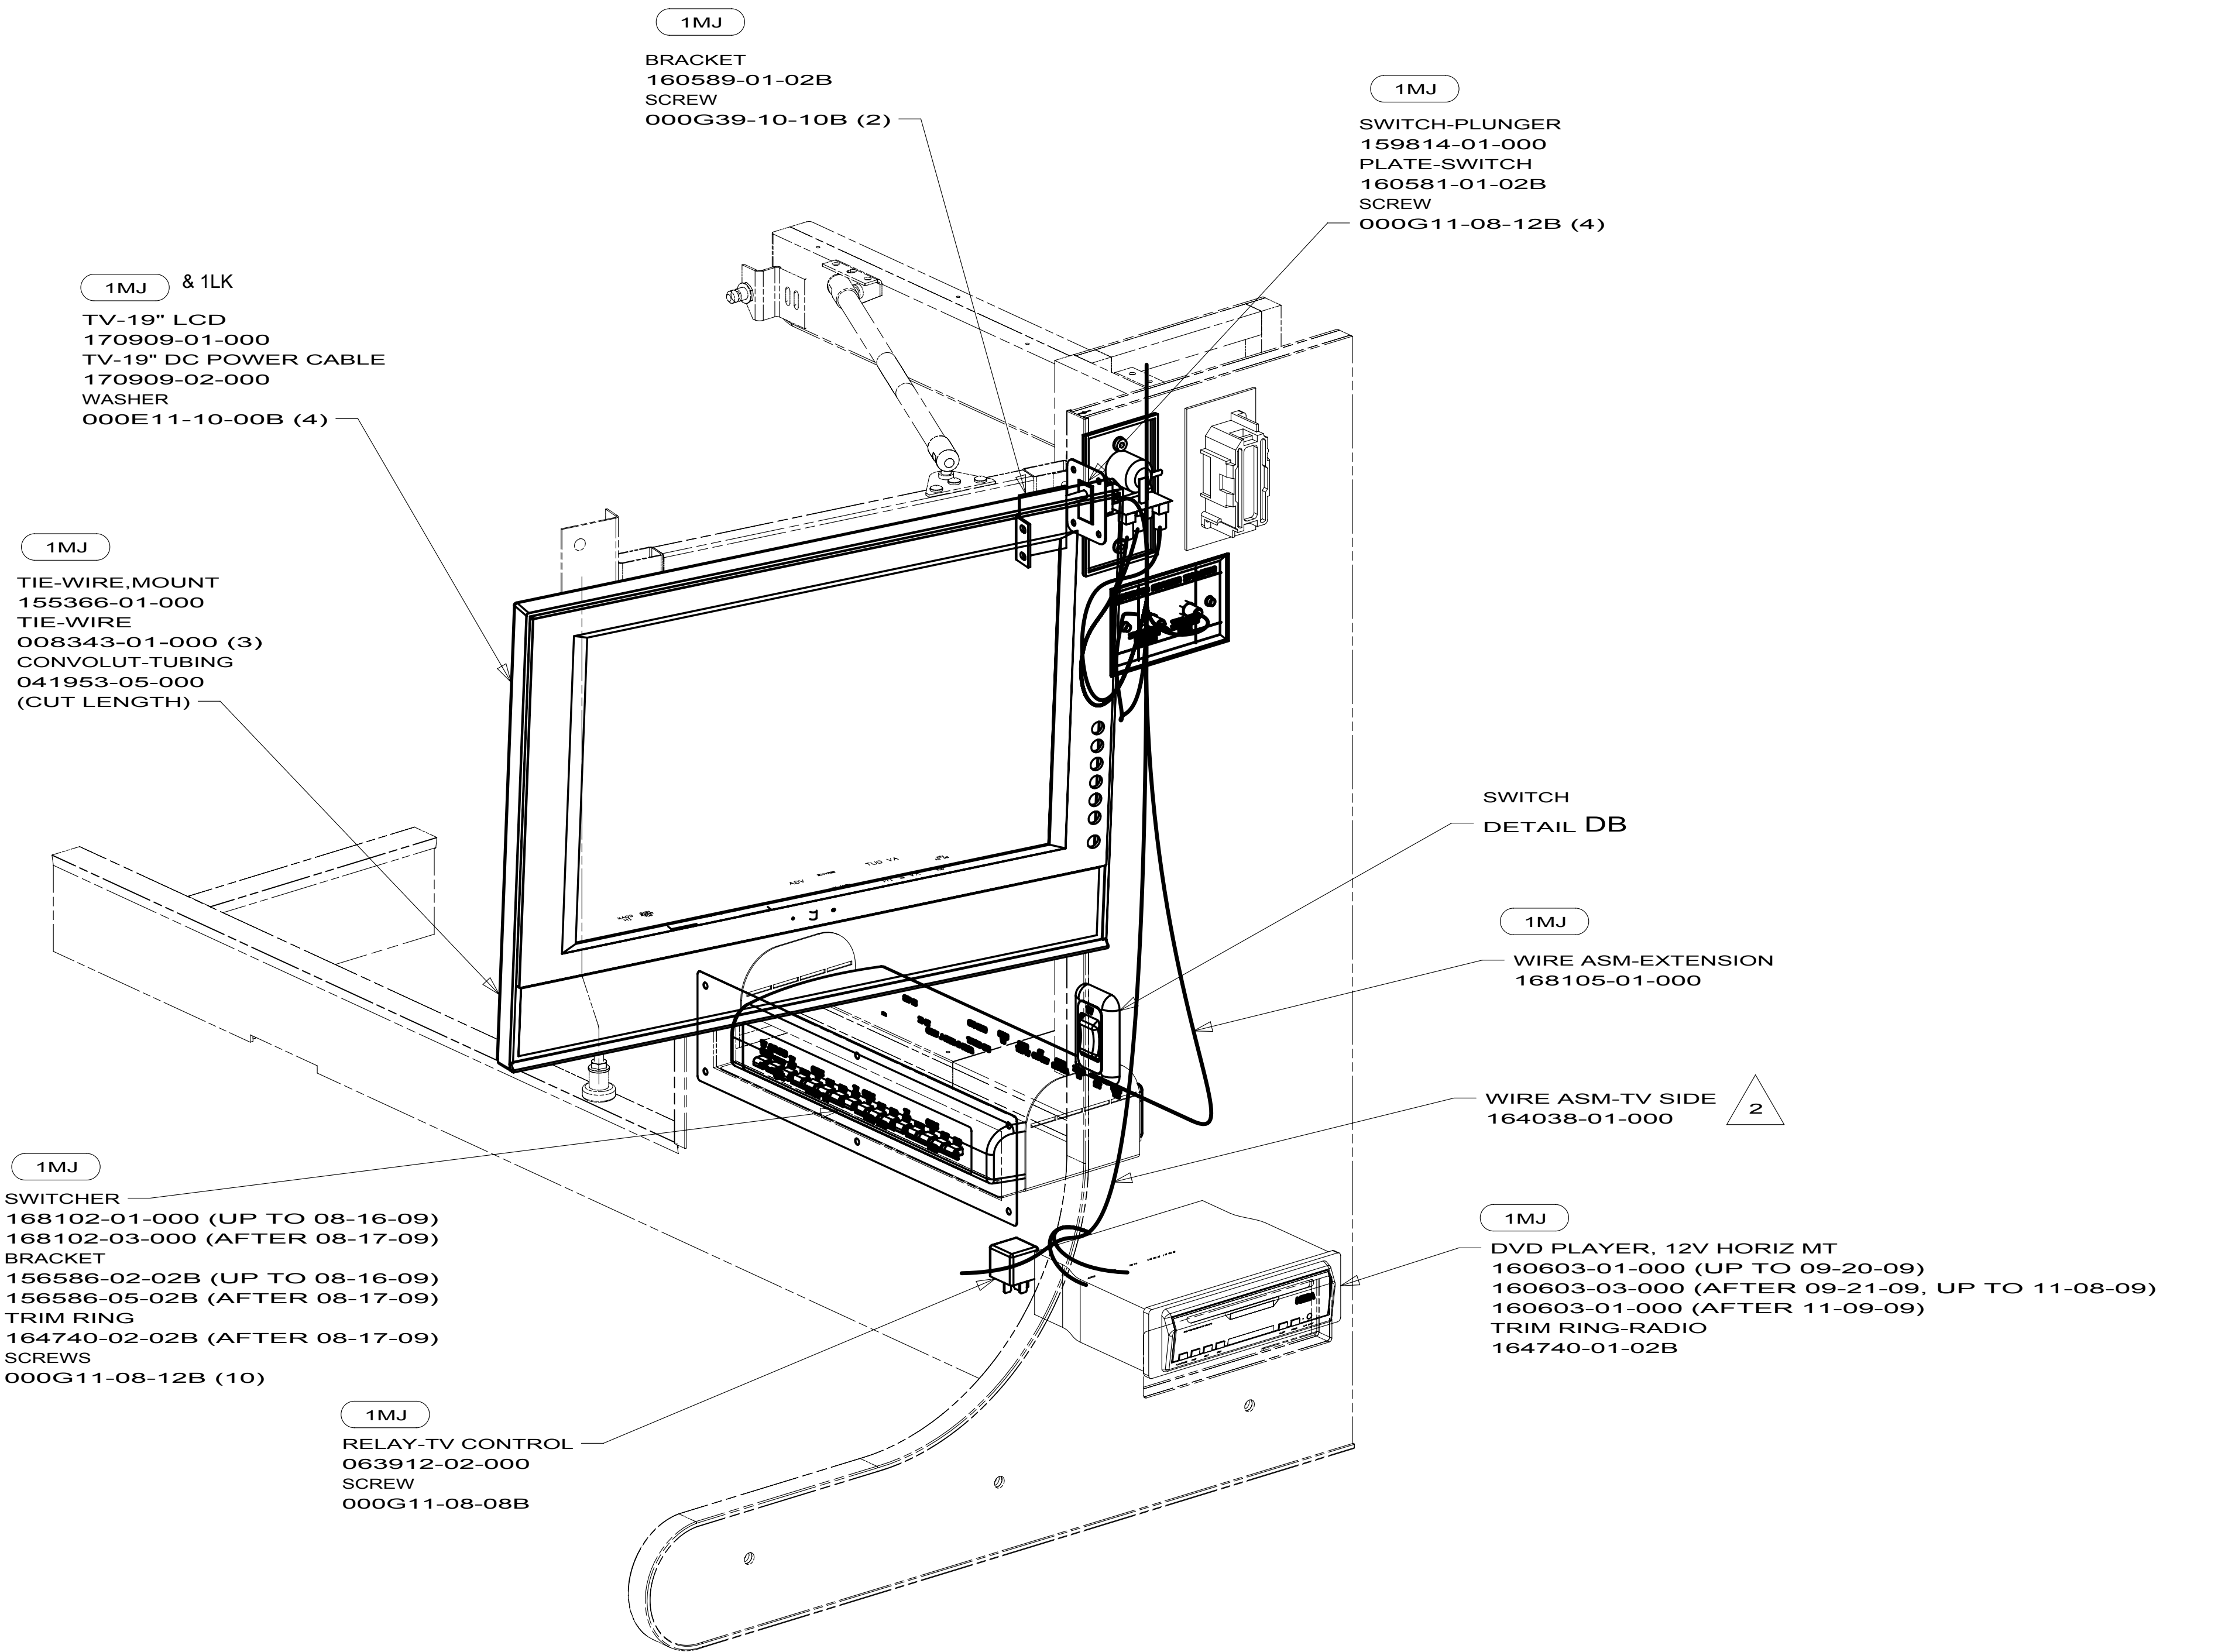
- 1L9 ENTERTAINMENT CENTER-CABOVER
- 1JM HOME THEATER SOUND SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DETAIL CA



DETAIL DB 1MJ & 1LK

SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-45-02A
SCREW
000G11-08-08B (2)

2 USED ON ALL ALASKAN RENTALS EXCEPT 229TR.

1. FOR CONNECTIONS SEE SHEET 5, DETAIL EA.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

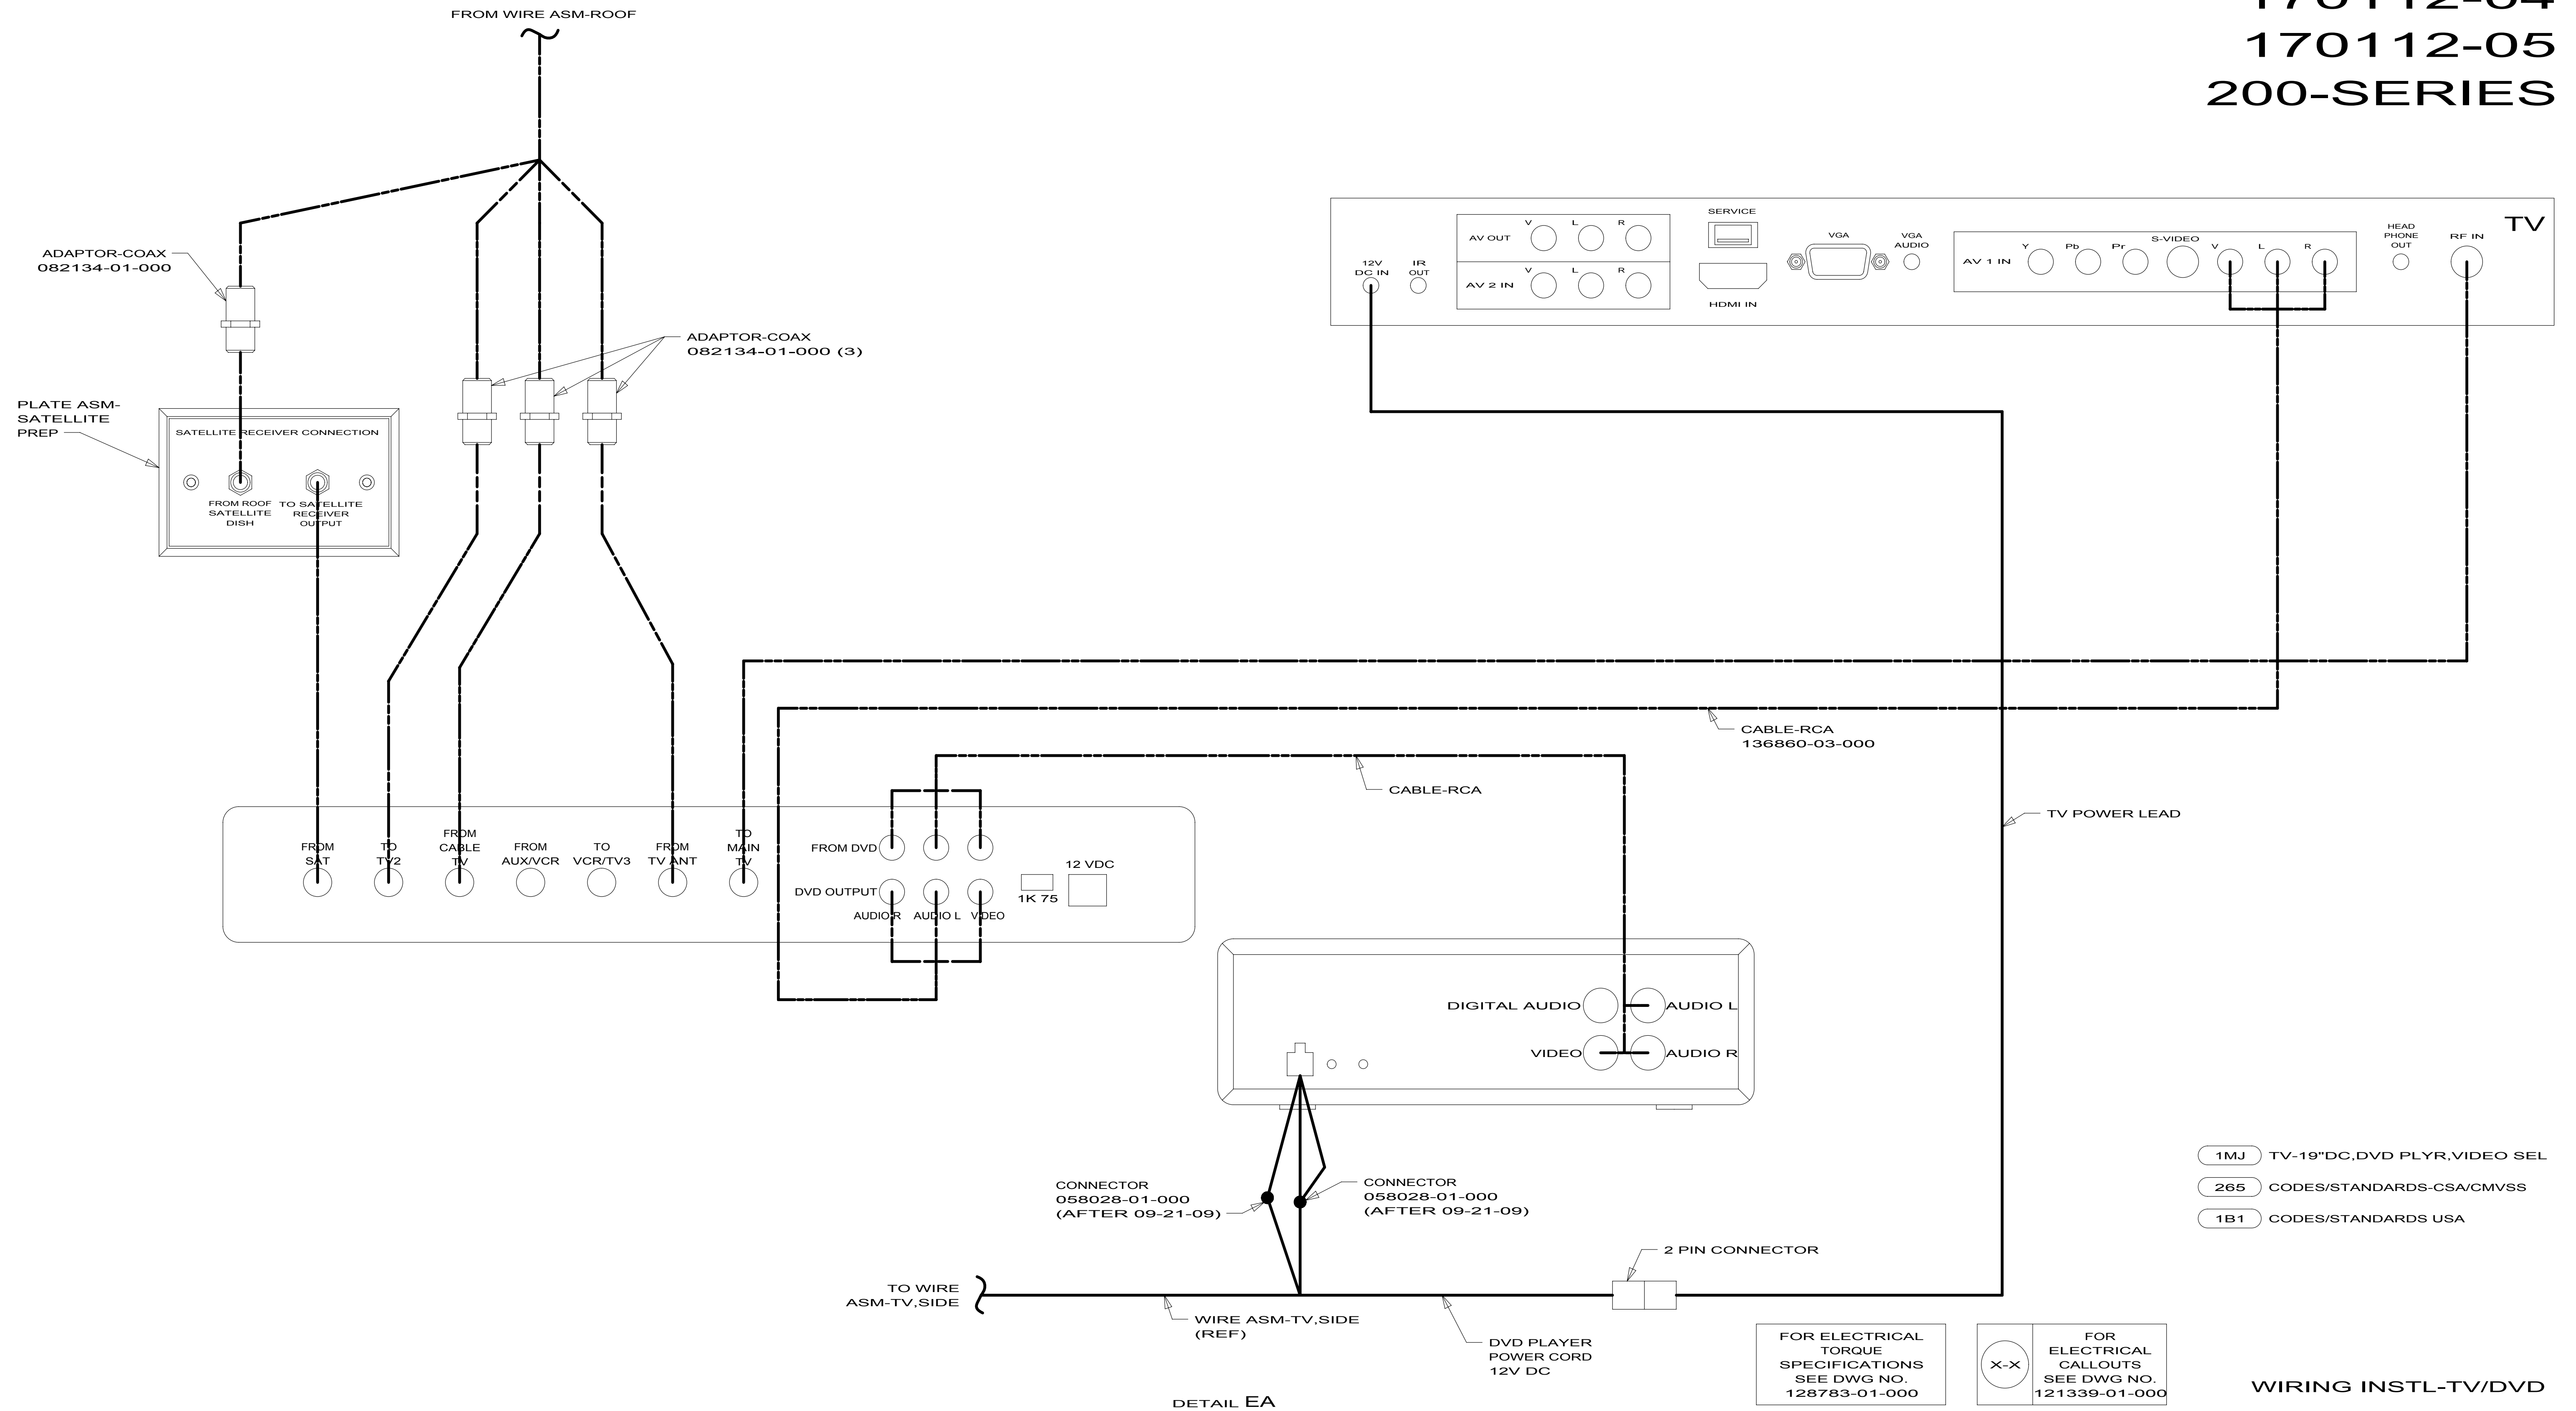
FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

1MJ TV-19"DC,DVD PLYR,VIDEO SEL
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

WIRING INSTL-TV/DVD
4 170112

1MJ


170112-01
170112-02
170112-03
170112-04
170112-05
200-SERIES



- 1MJ TV-19"DC,DVD PLYR,VIDEO SEL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

KEY	PART NUMBER	U/M	DESCRIPTION	160603-01-000
				VENDOR NO.
	160603-01-700	EA	REMOTE	DVD-1002-REM
	160603-01-701	EA	REMOTE SENSOR	DVD-1002-EYE
	160603-01-702	EA	TOOL - REMOVAL, DVD PLAYER	DVD-1002-TOOL

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	123775-01-700	EA	BULB - 10 WATT - HALOGEN	71-JC10
	165170-01-700	EA	LENS	81230-LENS

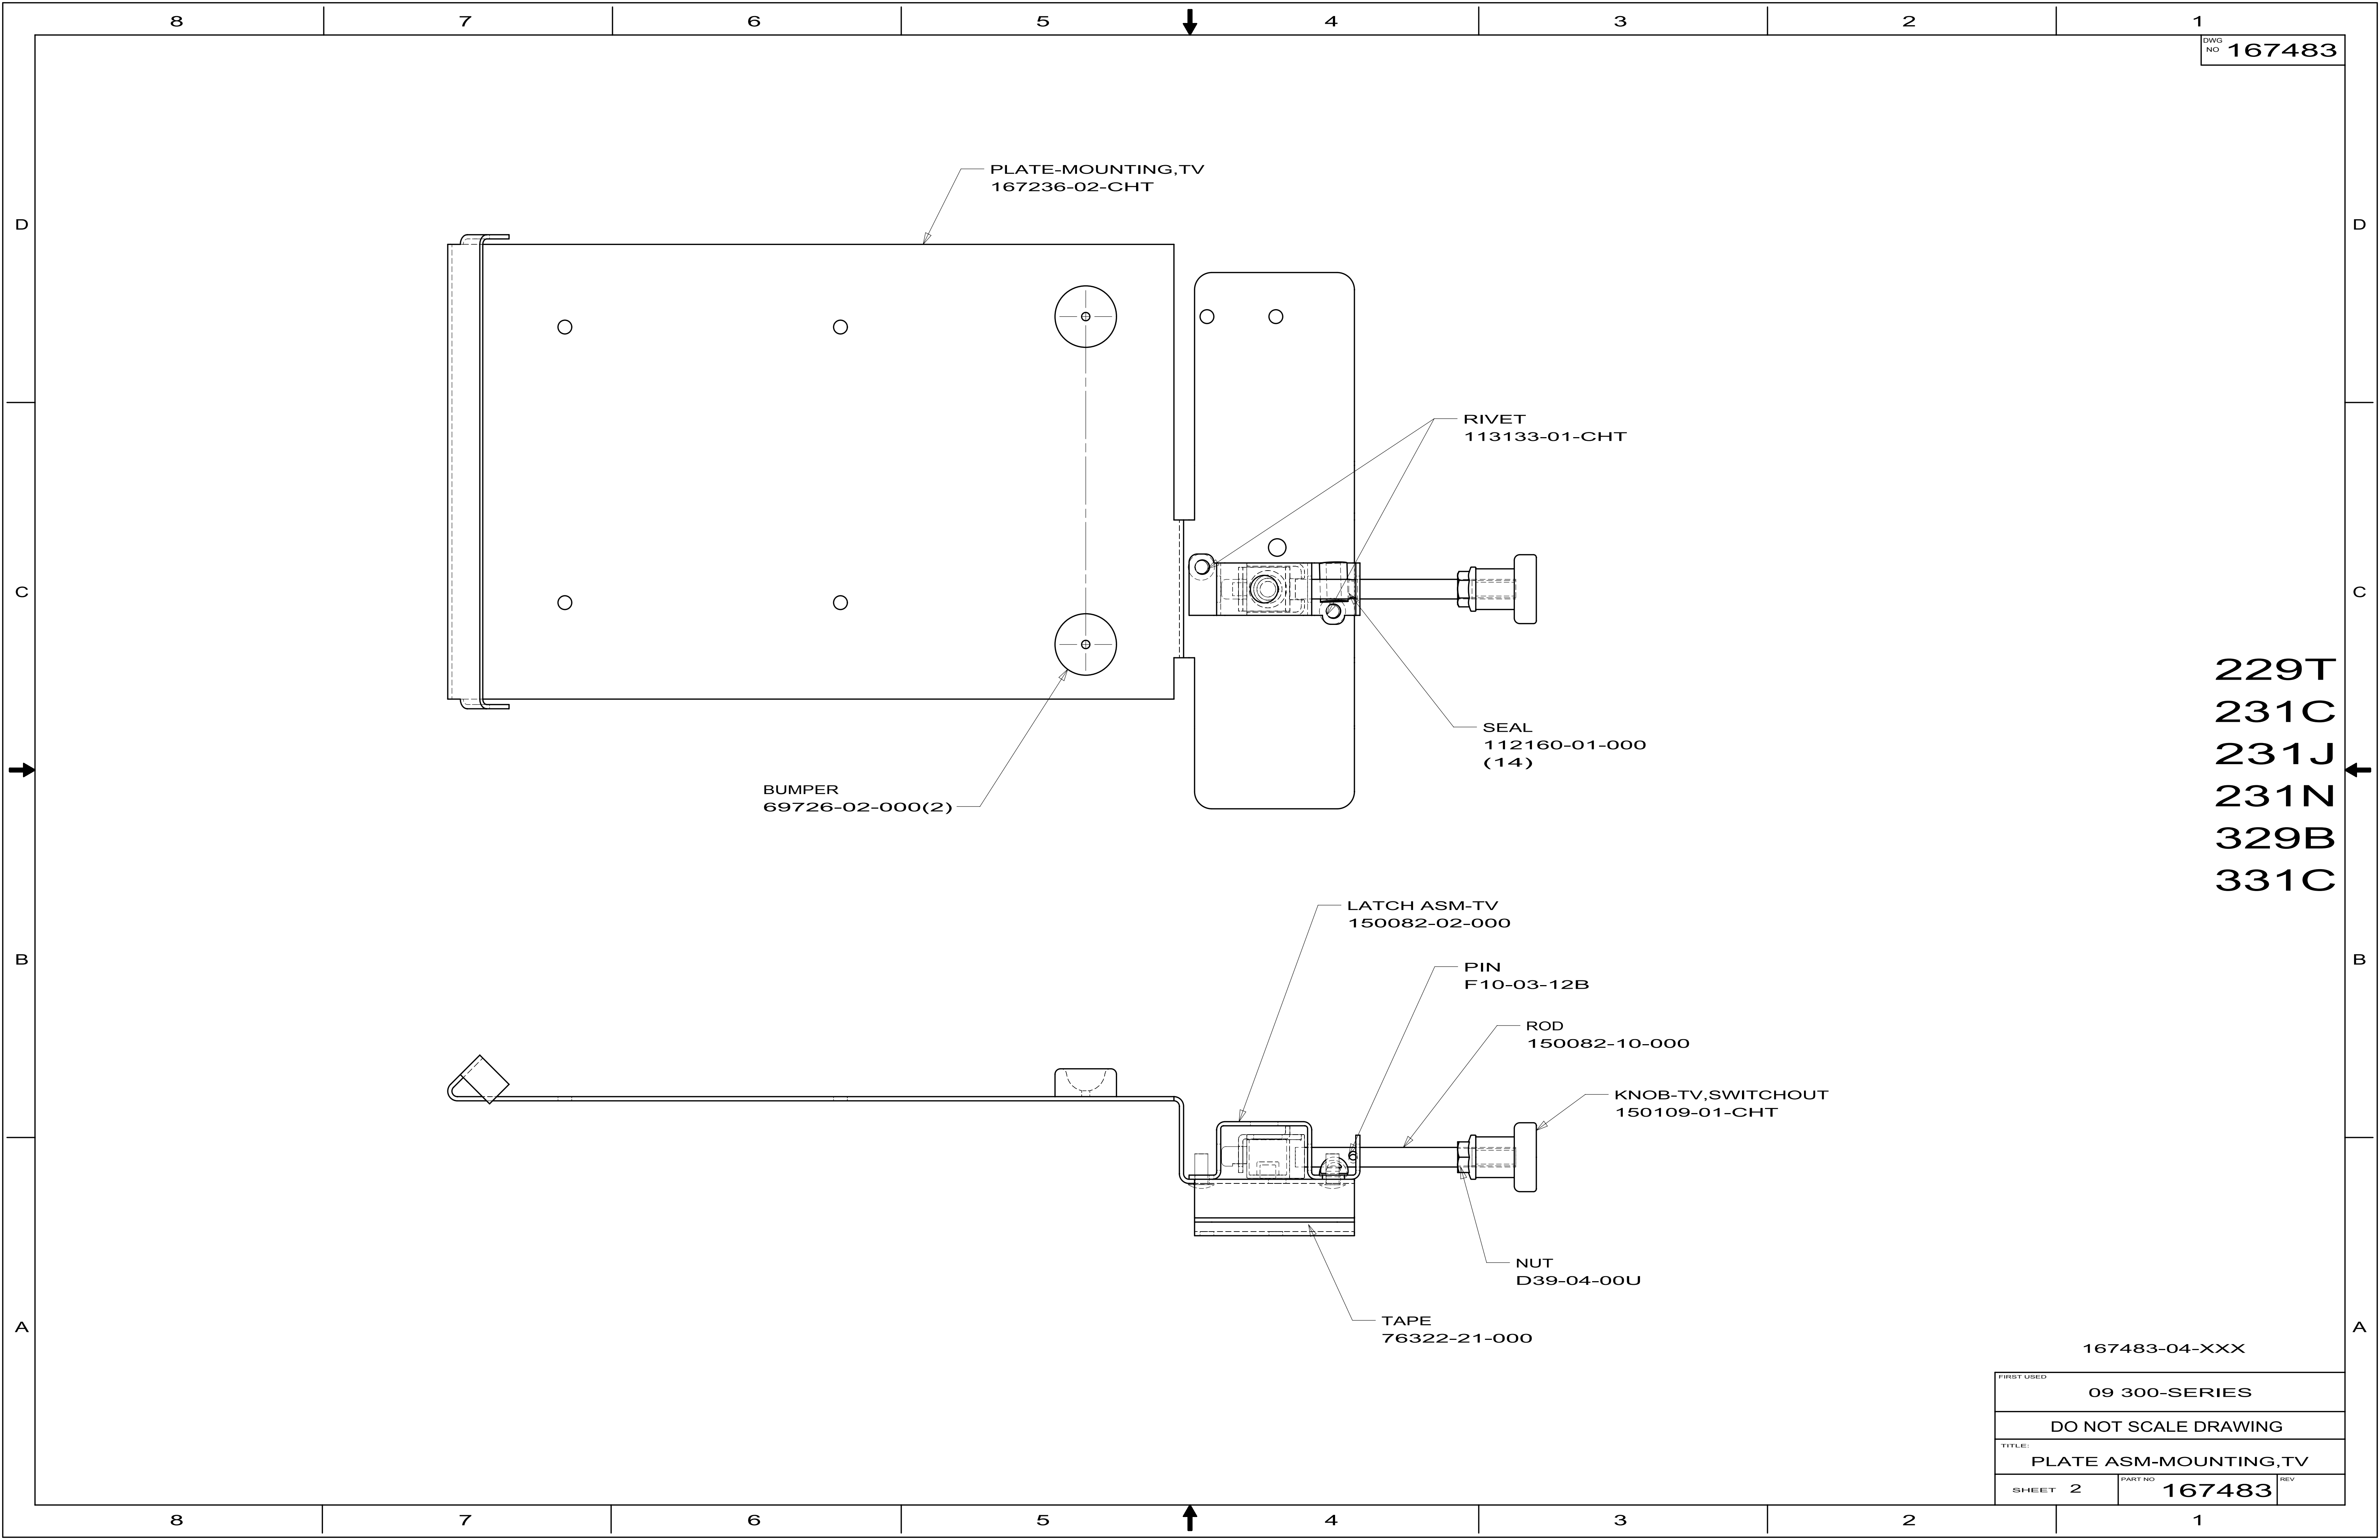

D

C

B

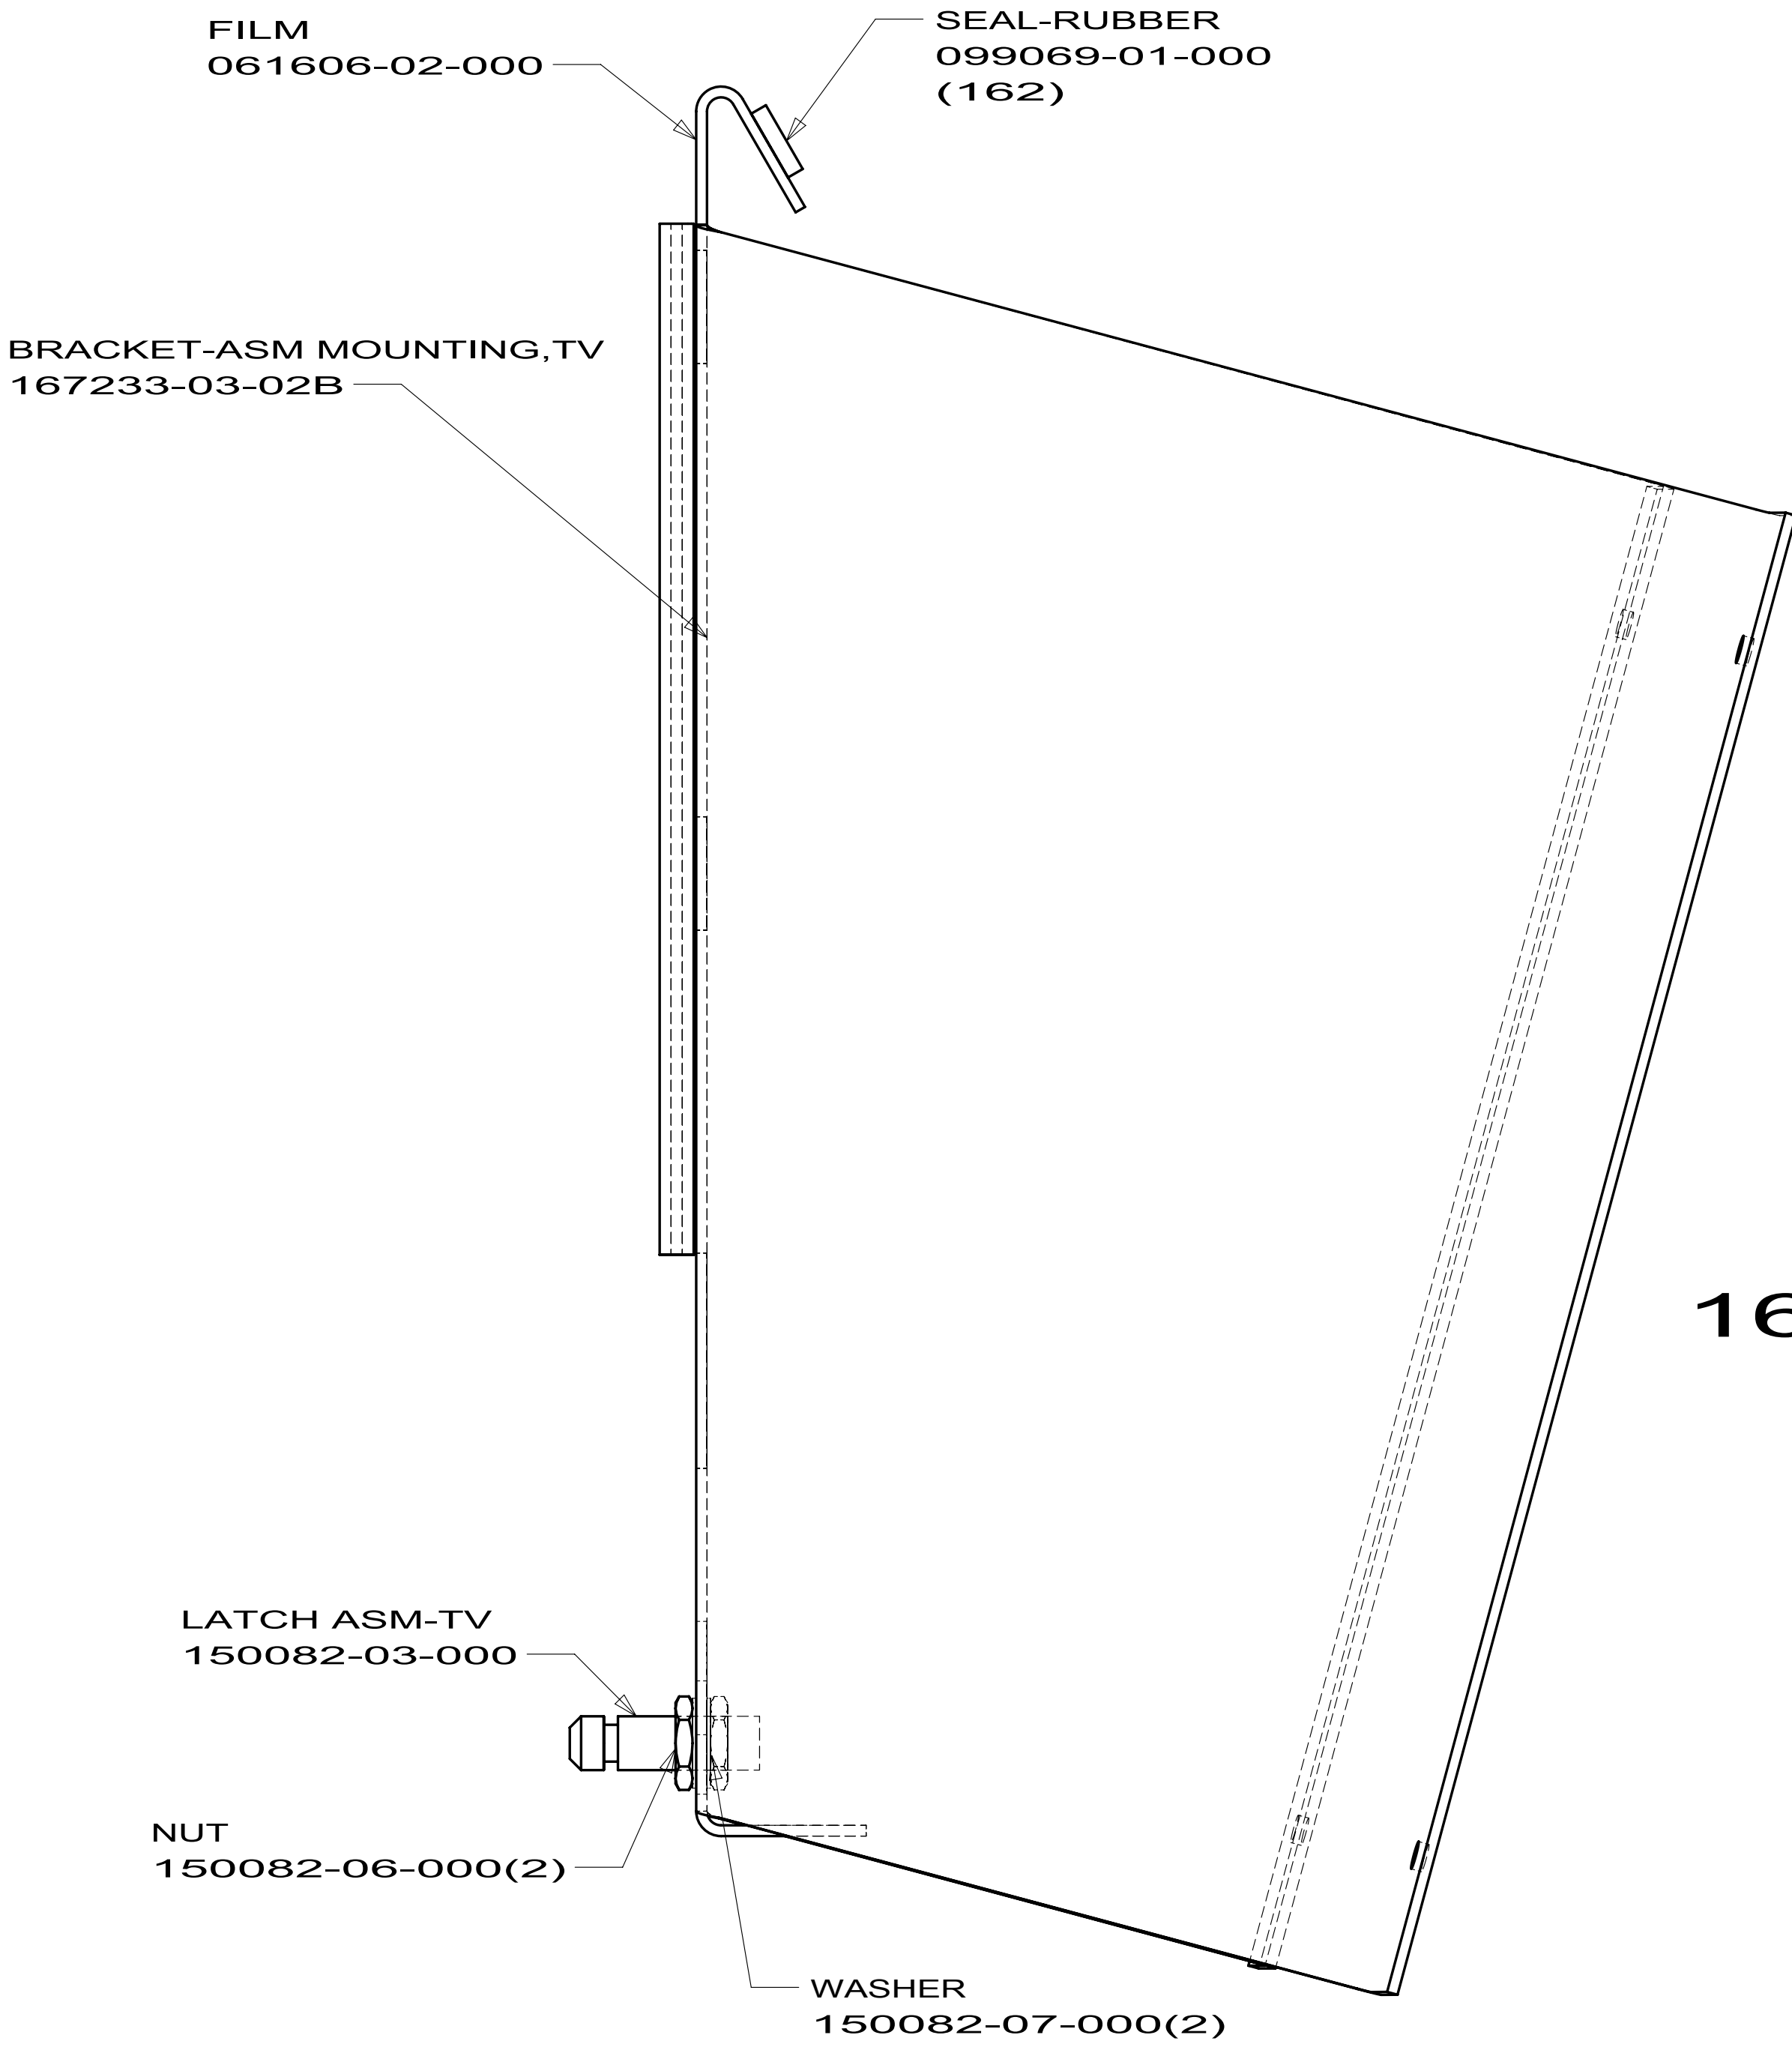
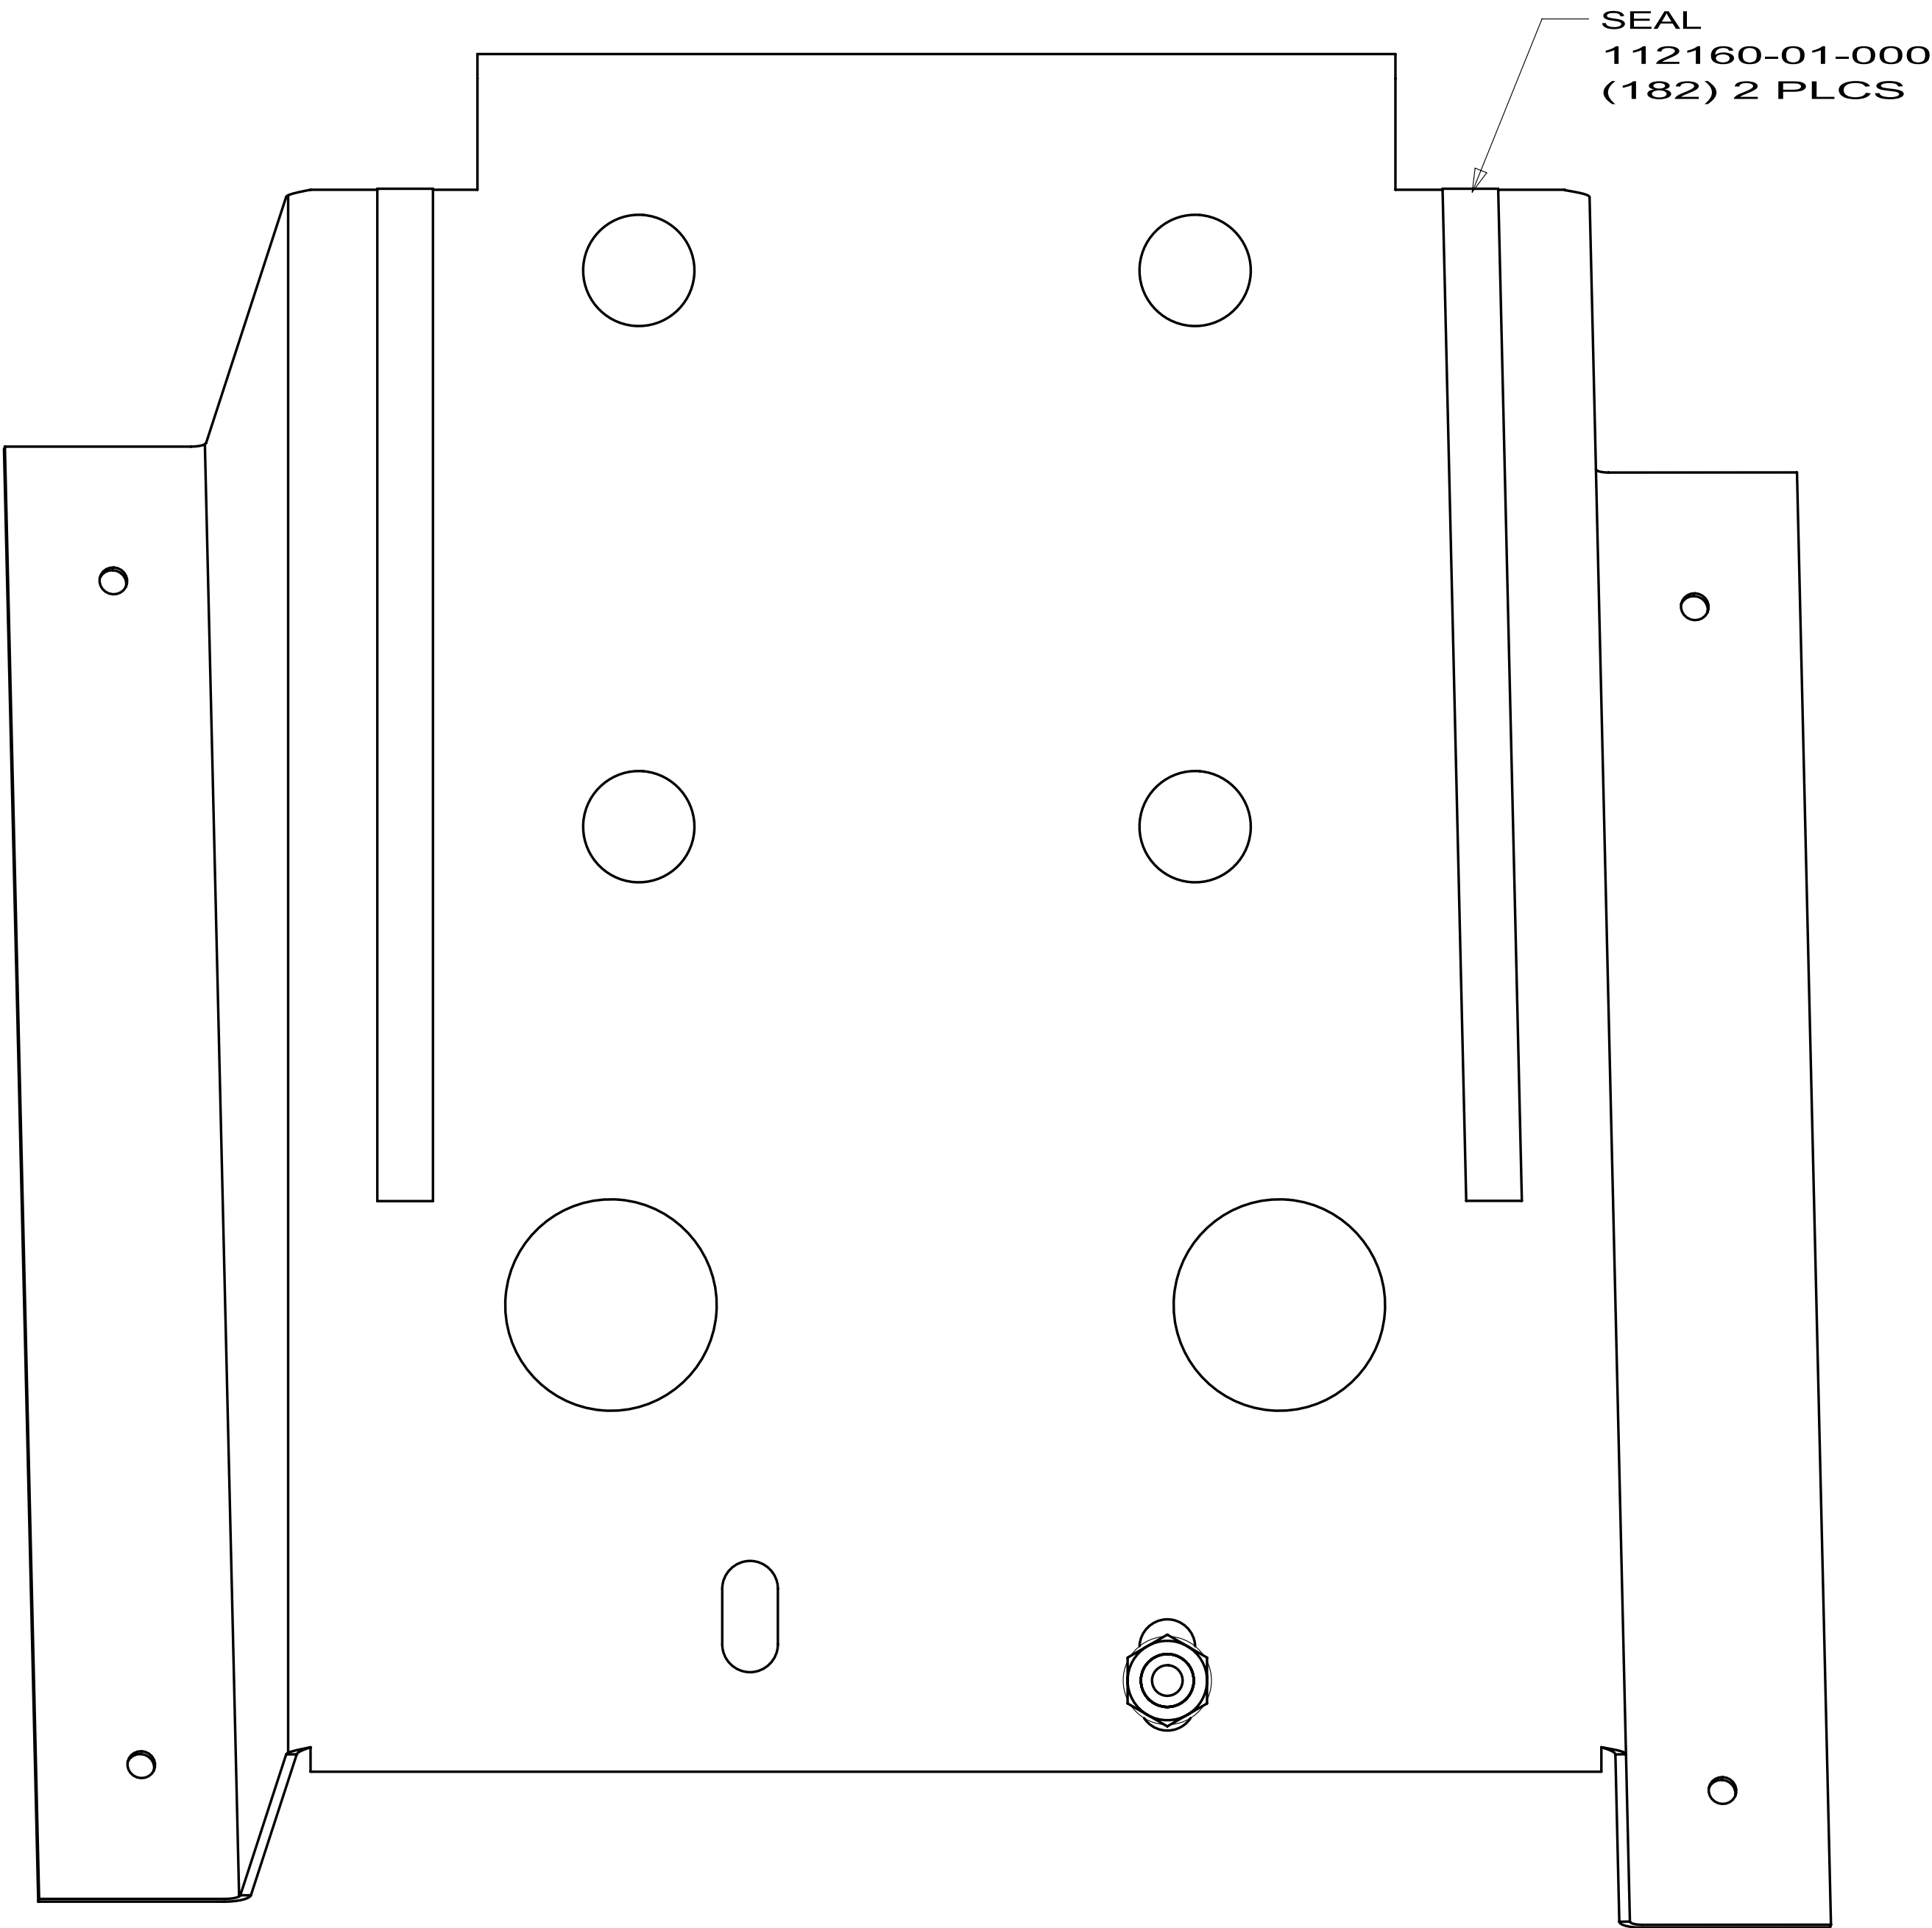
A

D

C

B

A



231C
231N
331C
169316-07

FIRST USED			09 200-SERIES					
DO NOT SCALE DRAWING								
TITLE: SUPPORT ASM-MOUNTING,TV								
SHEET 2		PART NO 169316		REV				

KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	170909-01-700	EA REMOTE - SERVICE PACK	PSVCJE1909

KEY	PART NUMBER	U/M DESCRIPTION	173514-01-000, 173514-02-000
	173514-01-700	EA REMOTE	VENDOR NO. 272041

KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	173556-01-700	EA REMOTE - SERVICE PACK	173556-01-000 PSVCJE3208