


DRAWING NO.	FEATURES
171922-01	-----
171922-11	1B112D
171922-15	26512D

171922

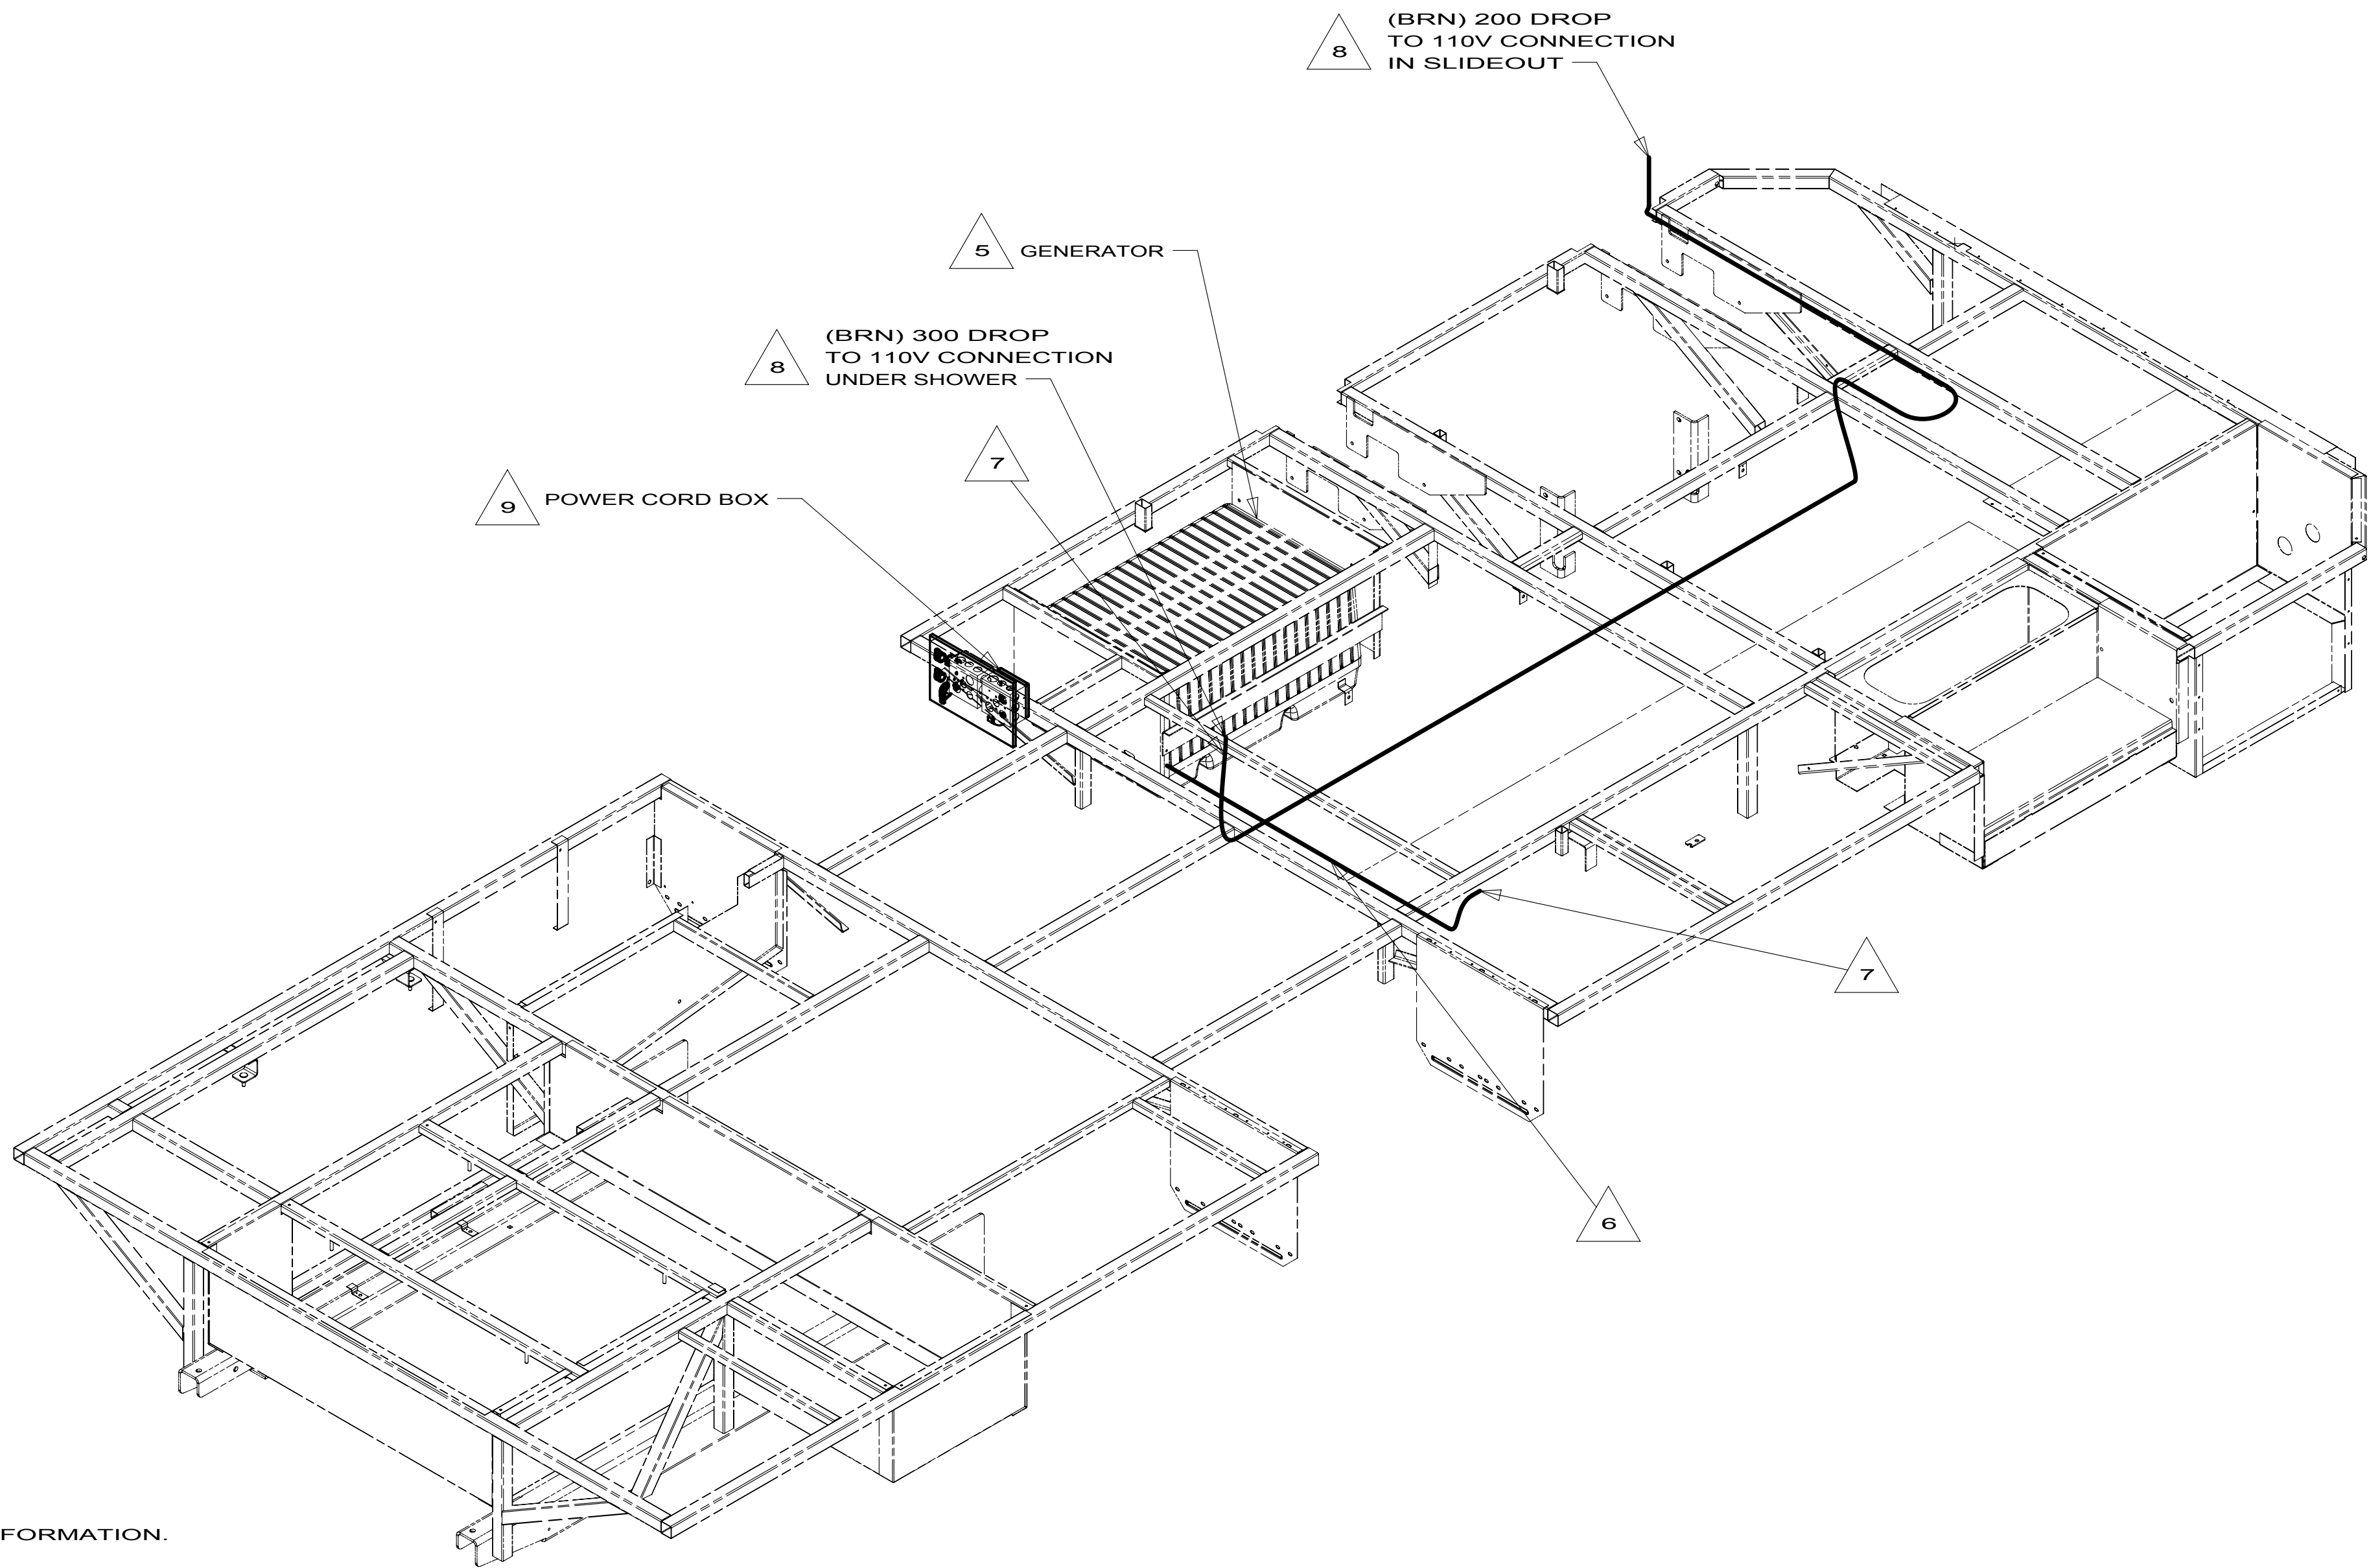

- 9 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 8 FLEX CORD IS PART OF WIRE ASM-CHASSIS.
- 7 WIRE ASM-110V PASSES THROUGH FLOOR IN THIS AREA.
- 6 WIRE ASM-110V ROUTED UNDER FLOOR IN THIS AREA.
- 5 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.

4. SEE WIRING DIAGRAM-BODY,110V FOR ADDITIONAL INFORMATION.
3. ALL GROUND WIRE TO BE COVERED WITH TUBING 008041-02-000.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 010497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW 000G67-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 010495-01-000 OR CLIP 080734-01-000 EVERY 600MM. USE SCREW 000G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:


- 12D ELECTRICAL SYSTEM 30 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B126512D

10 728B

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

WIRING INSTL-BODY,110V
1 4 171922

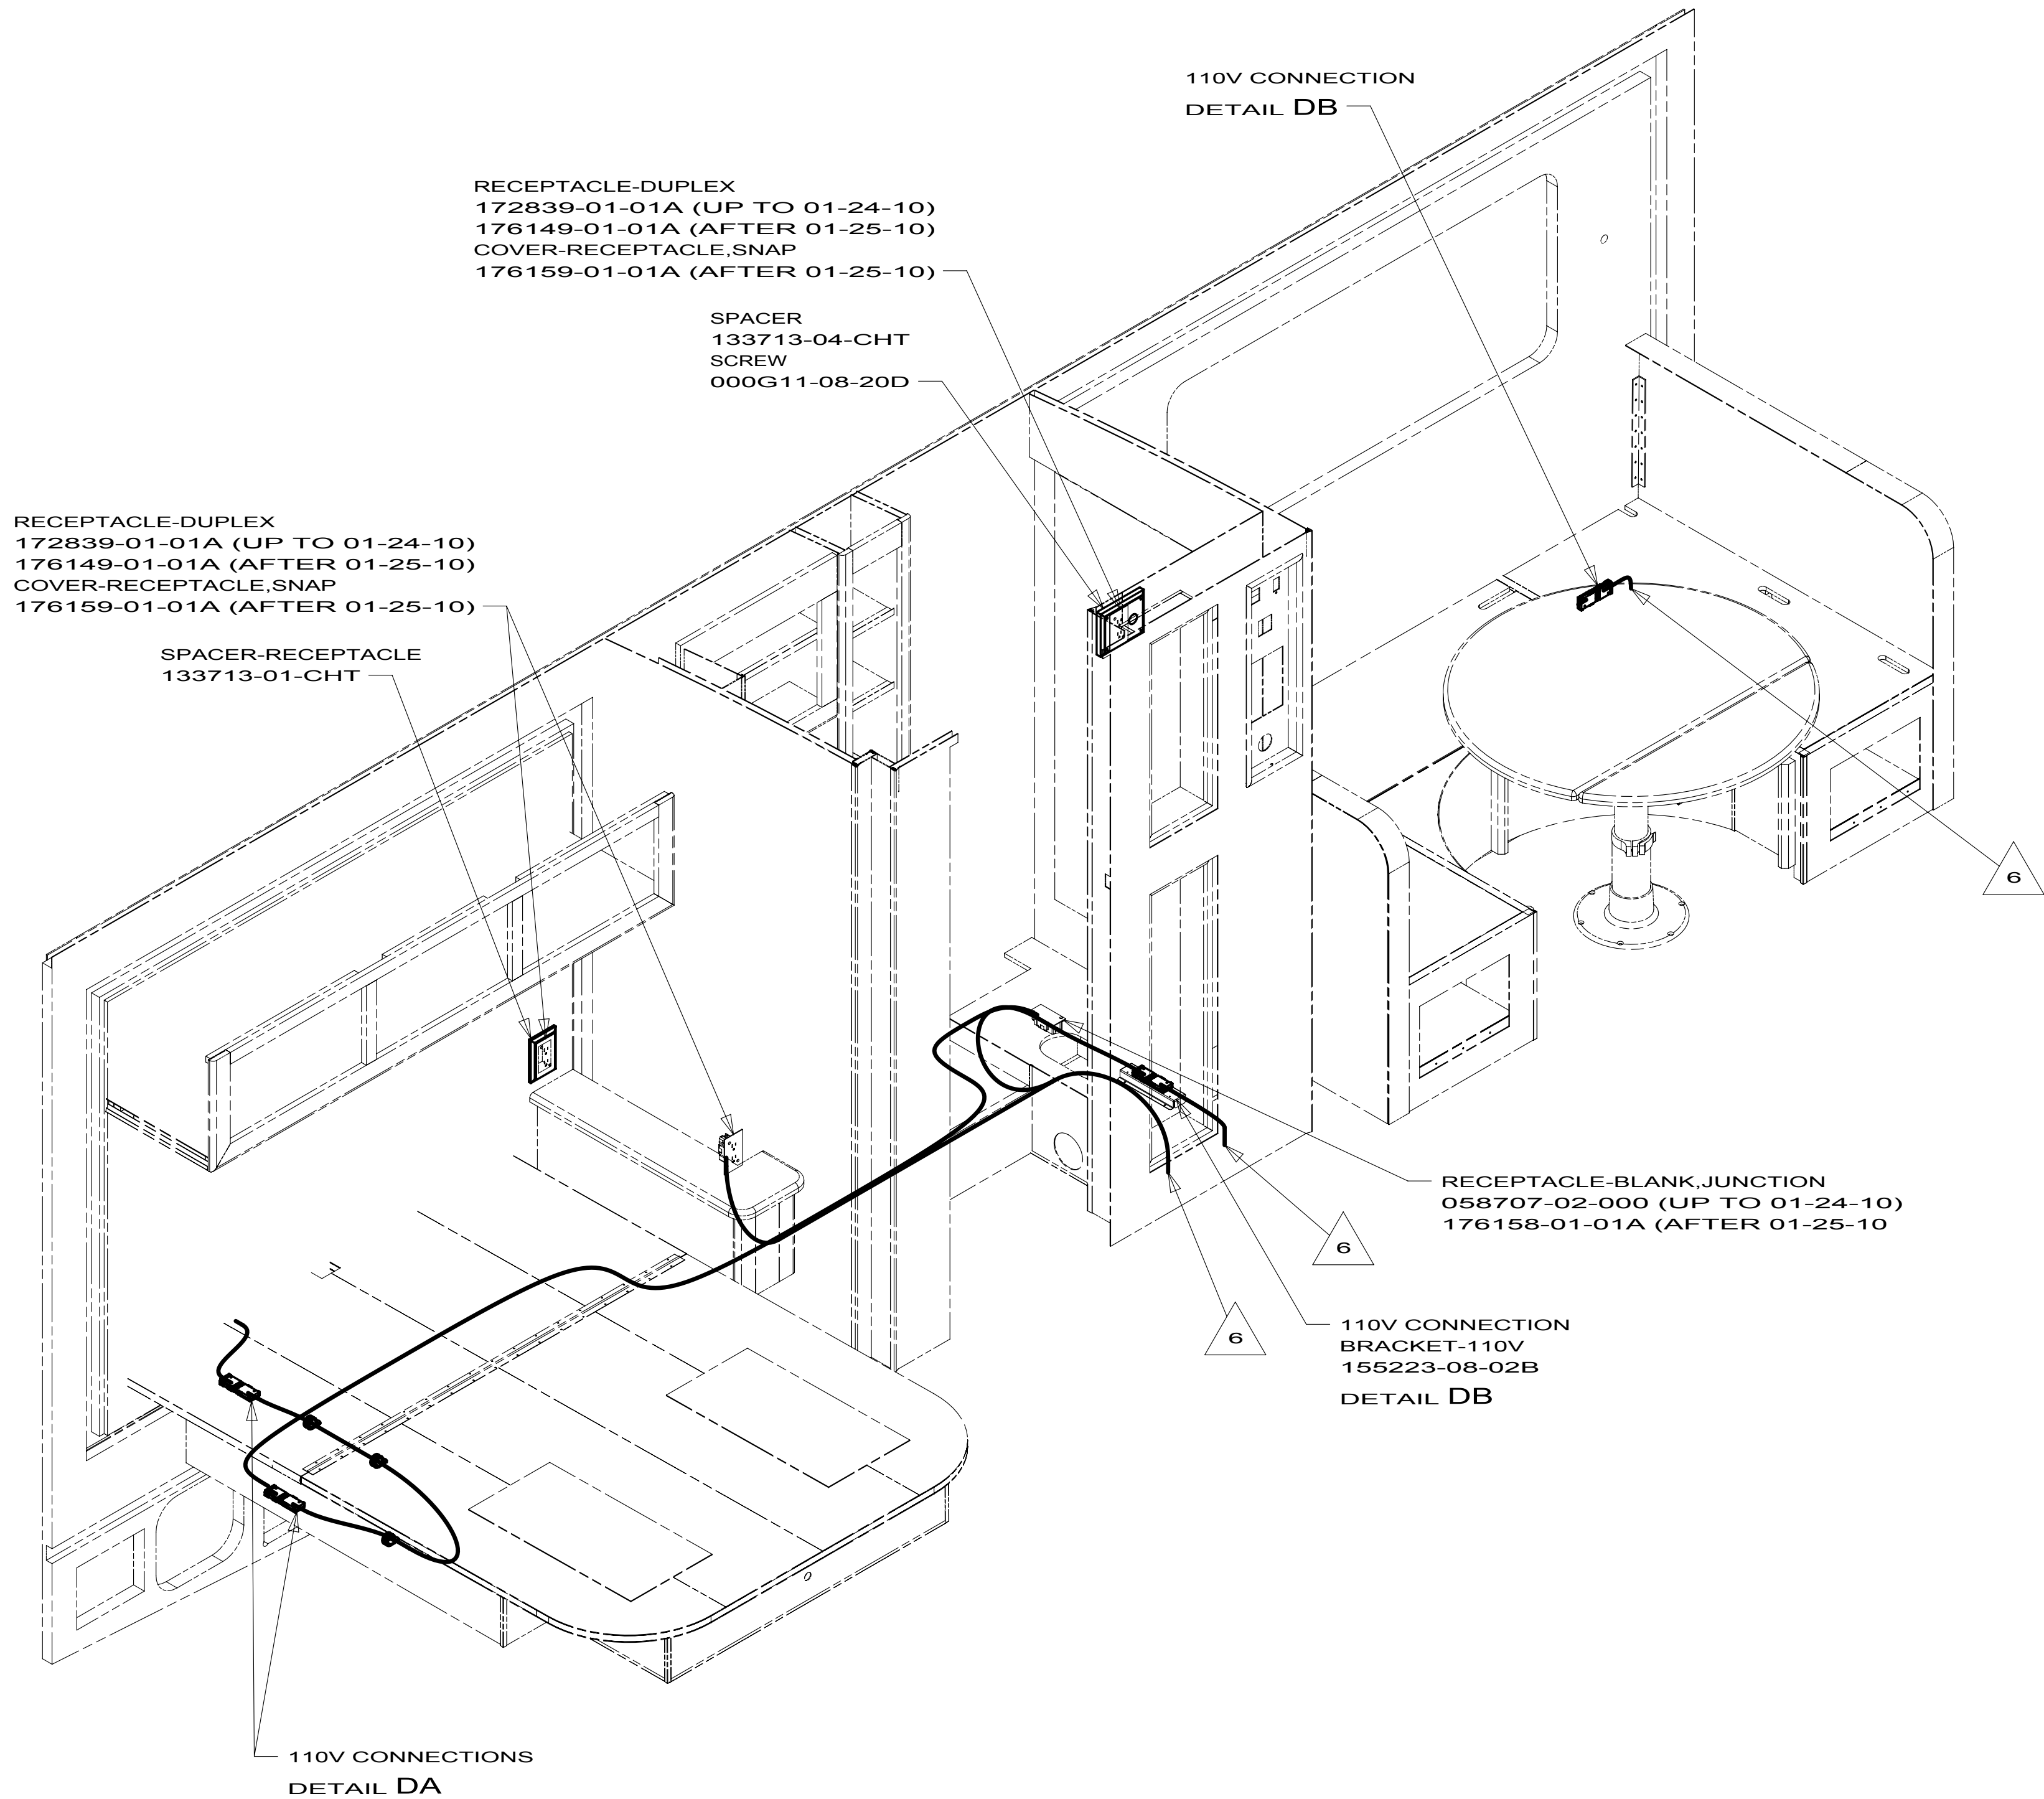

- 6 WIRE ROUTED THROUGH FLOOR AT THIS POINT.
- 5 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
4. SEE WIRING DIAGRAM-BODY,110V FOR ADDITIONAL INFORMATION.
3. ALL GROUND WIRE TO BE COVERED WITH TUBING 008041-02-000.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 010497-05-000
WITHIN 200MM OF OUTLET BOXES, USE SCREW 000G67-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 010495-01-000
OR CLIP 080734-01-000 EVERY 600MM. USE SCREW
000G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

X-X


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


- 40B INVERTER-DC/AC, 300 WATT
- 13B INVERTER/CHARGER-DC/AC W/O
- 12D ELECTRICAL SYSTEM 30 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265 12D

10 728B


WIRING INSTL-BODY,110V

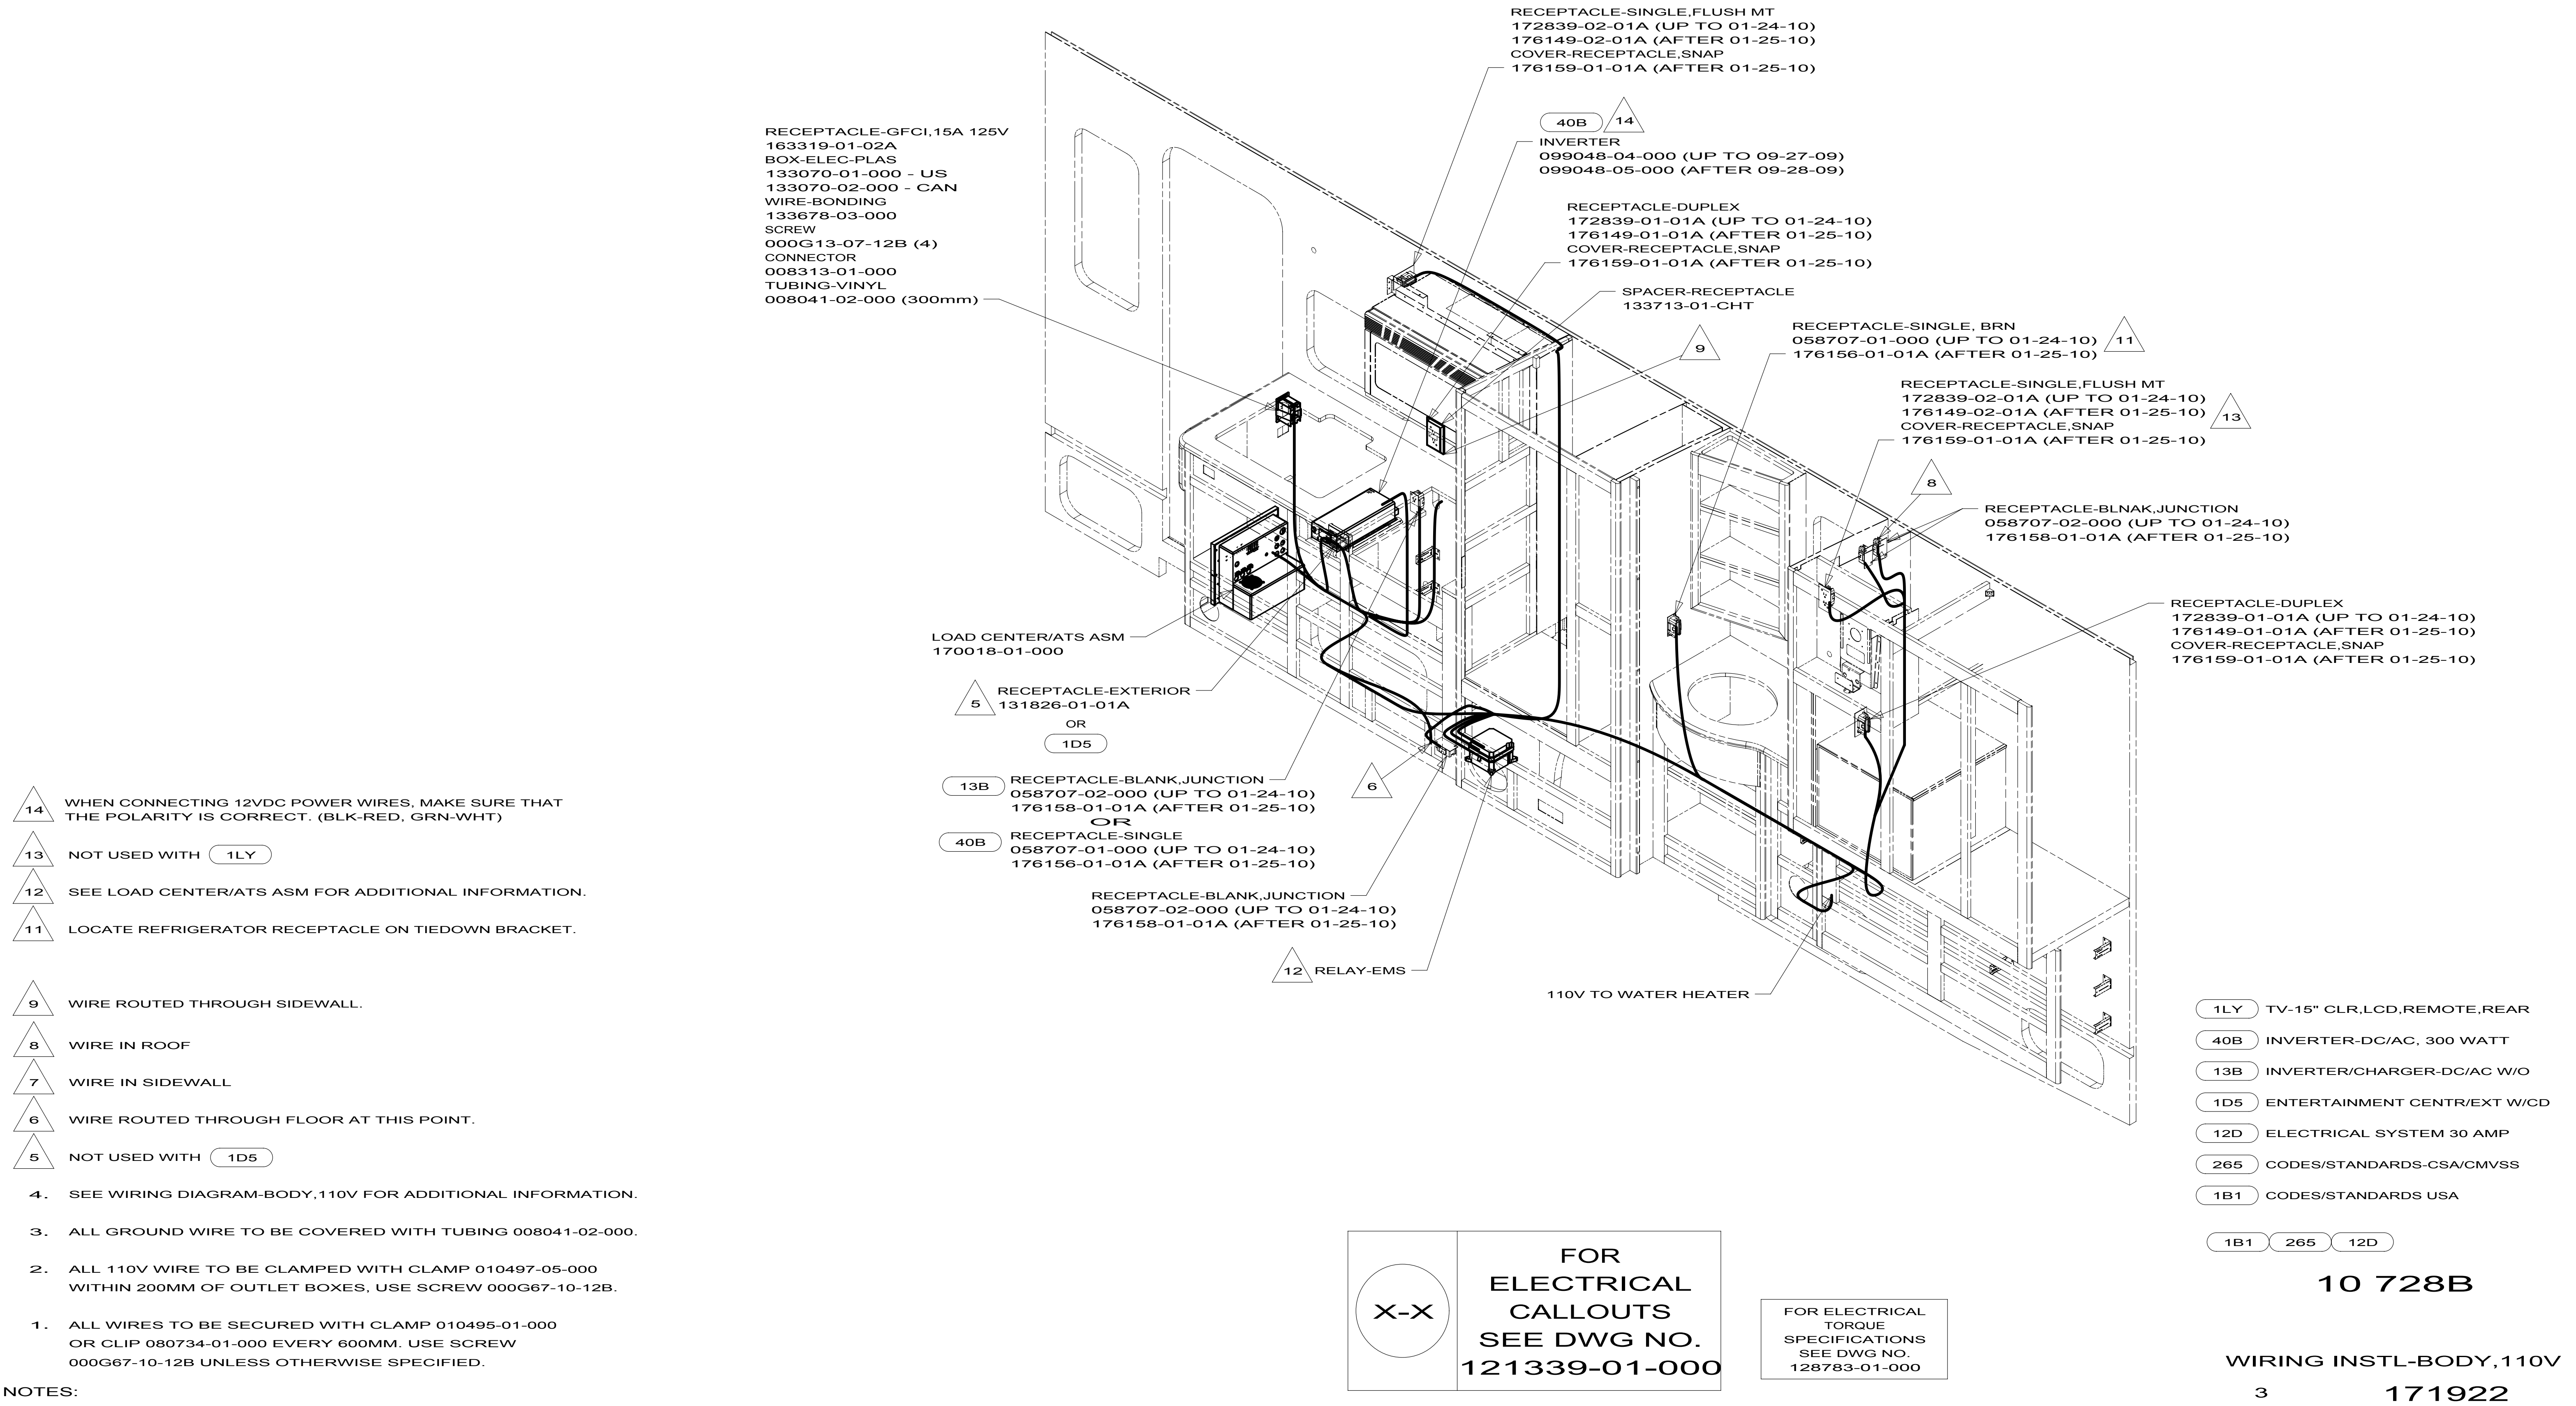

NOTES:

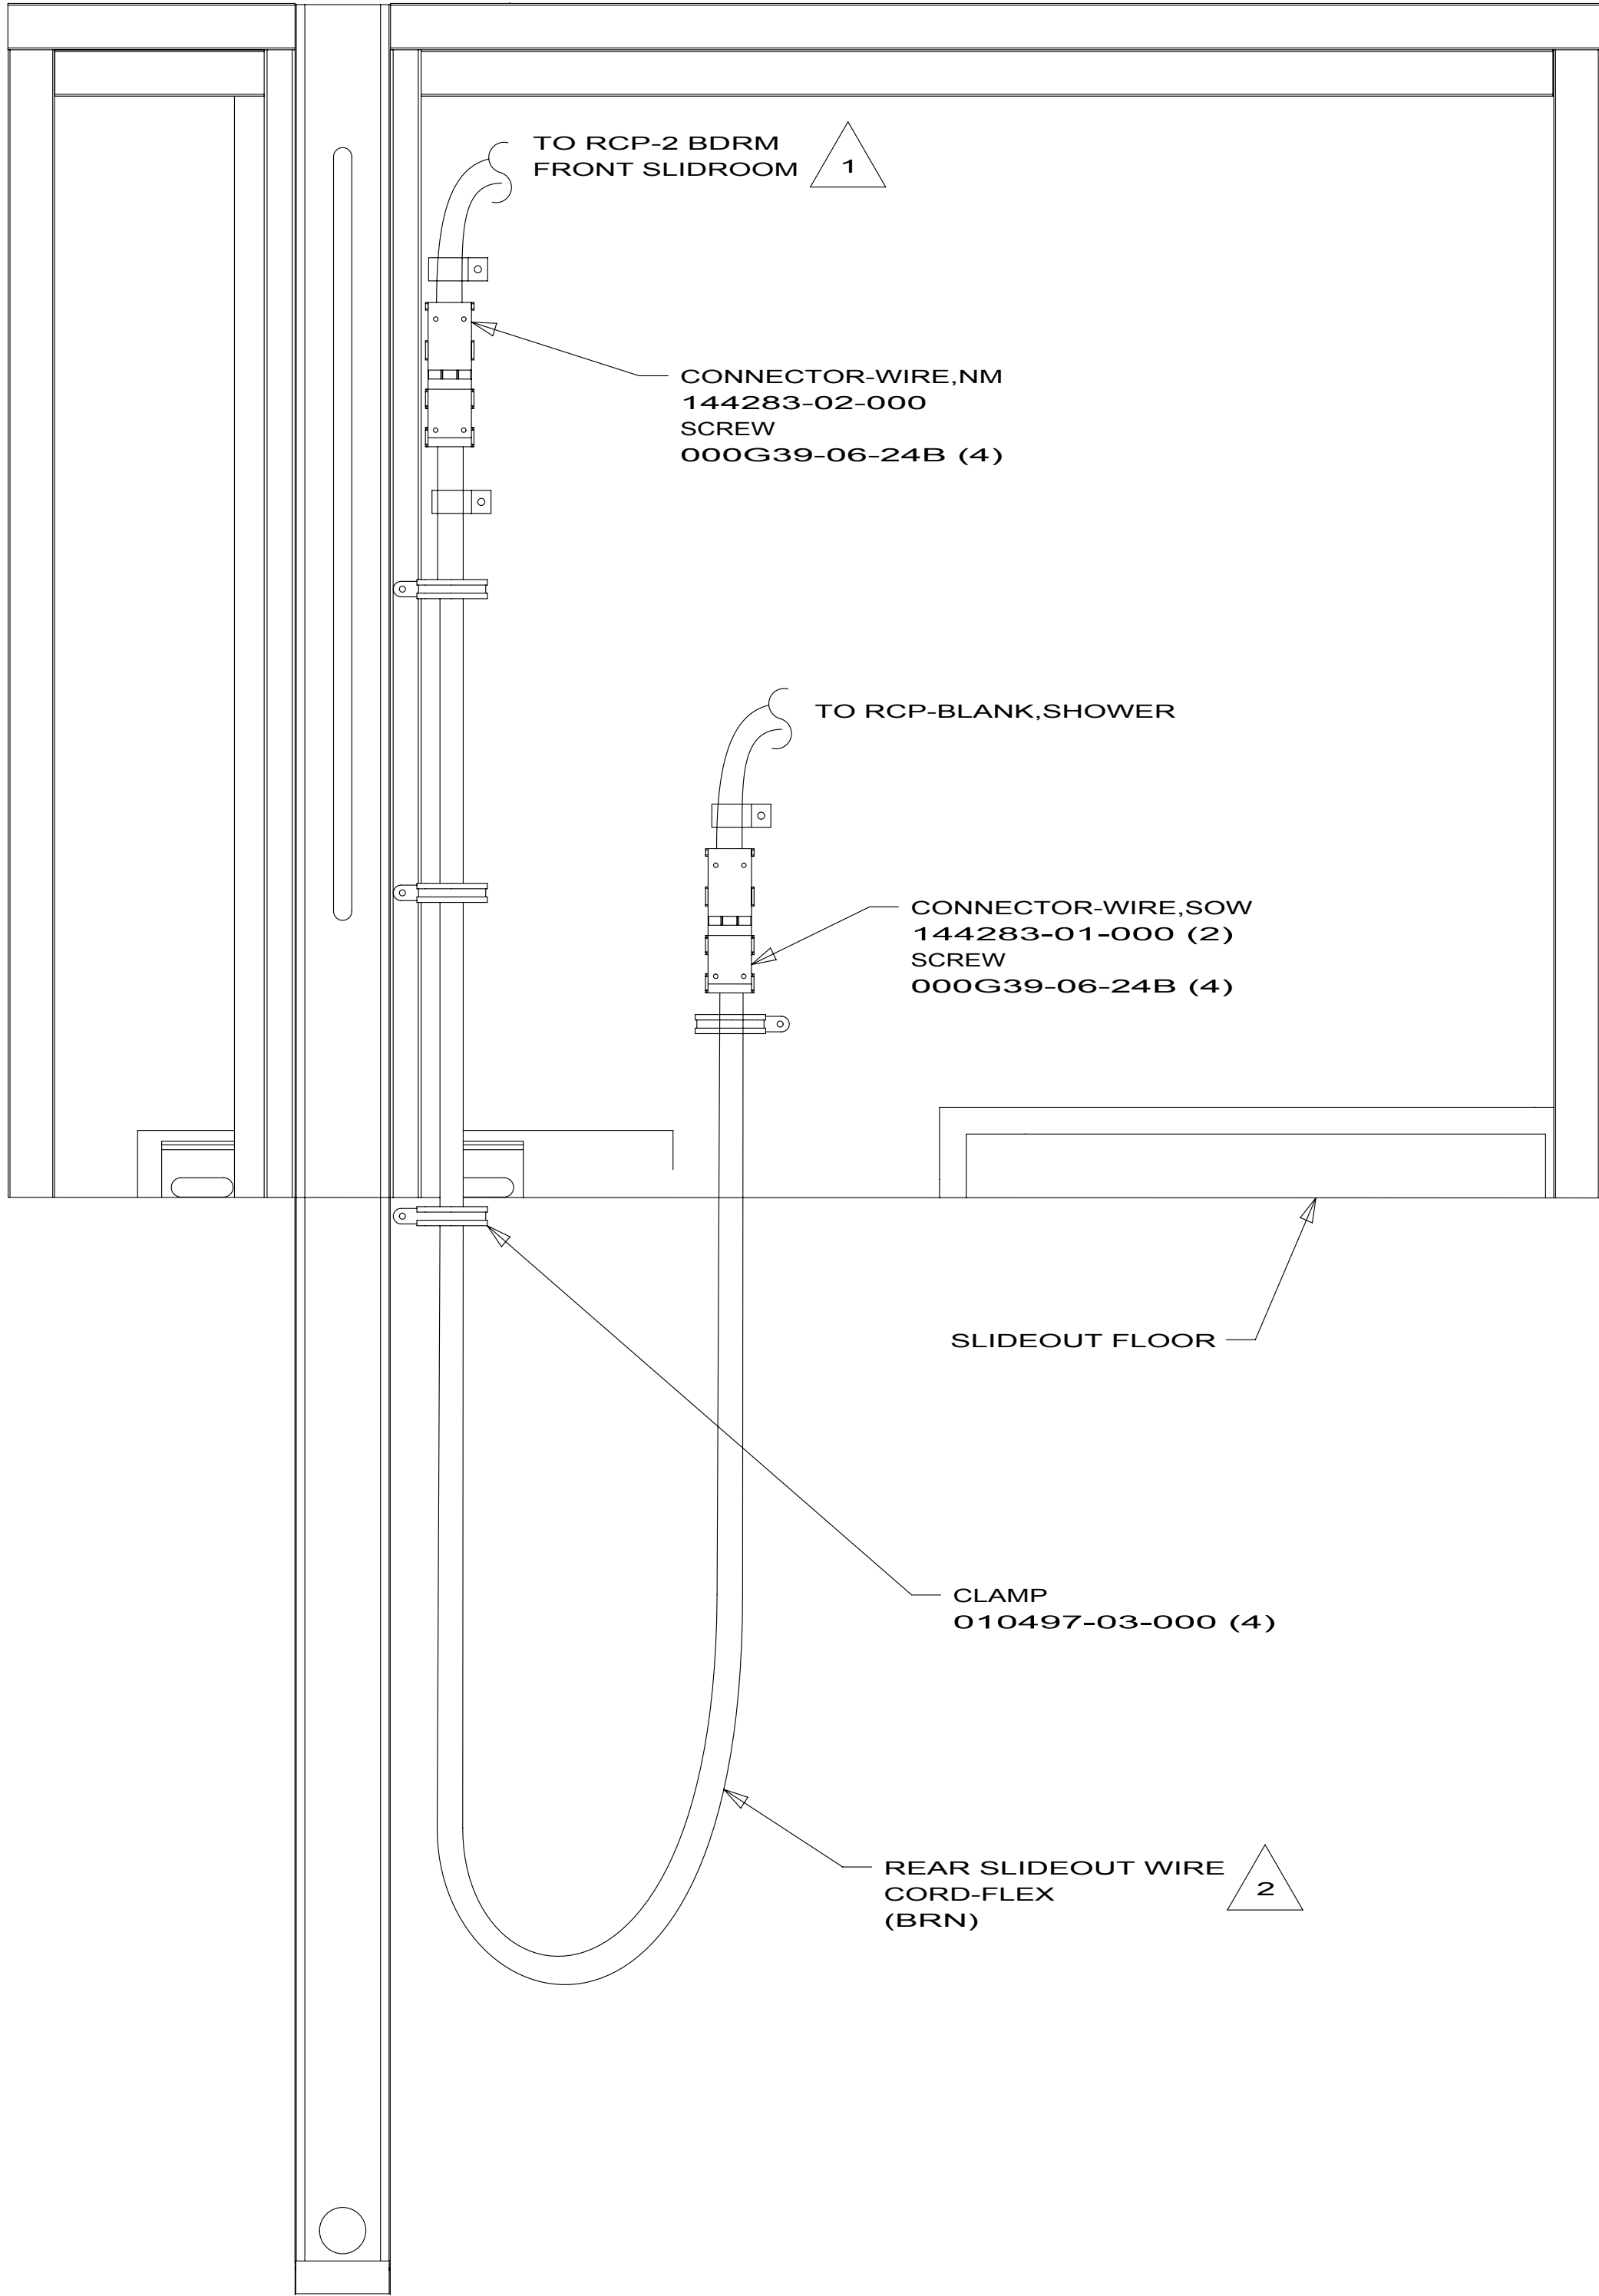

DETAIL DA

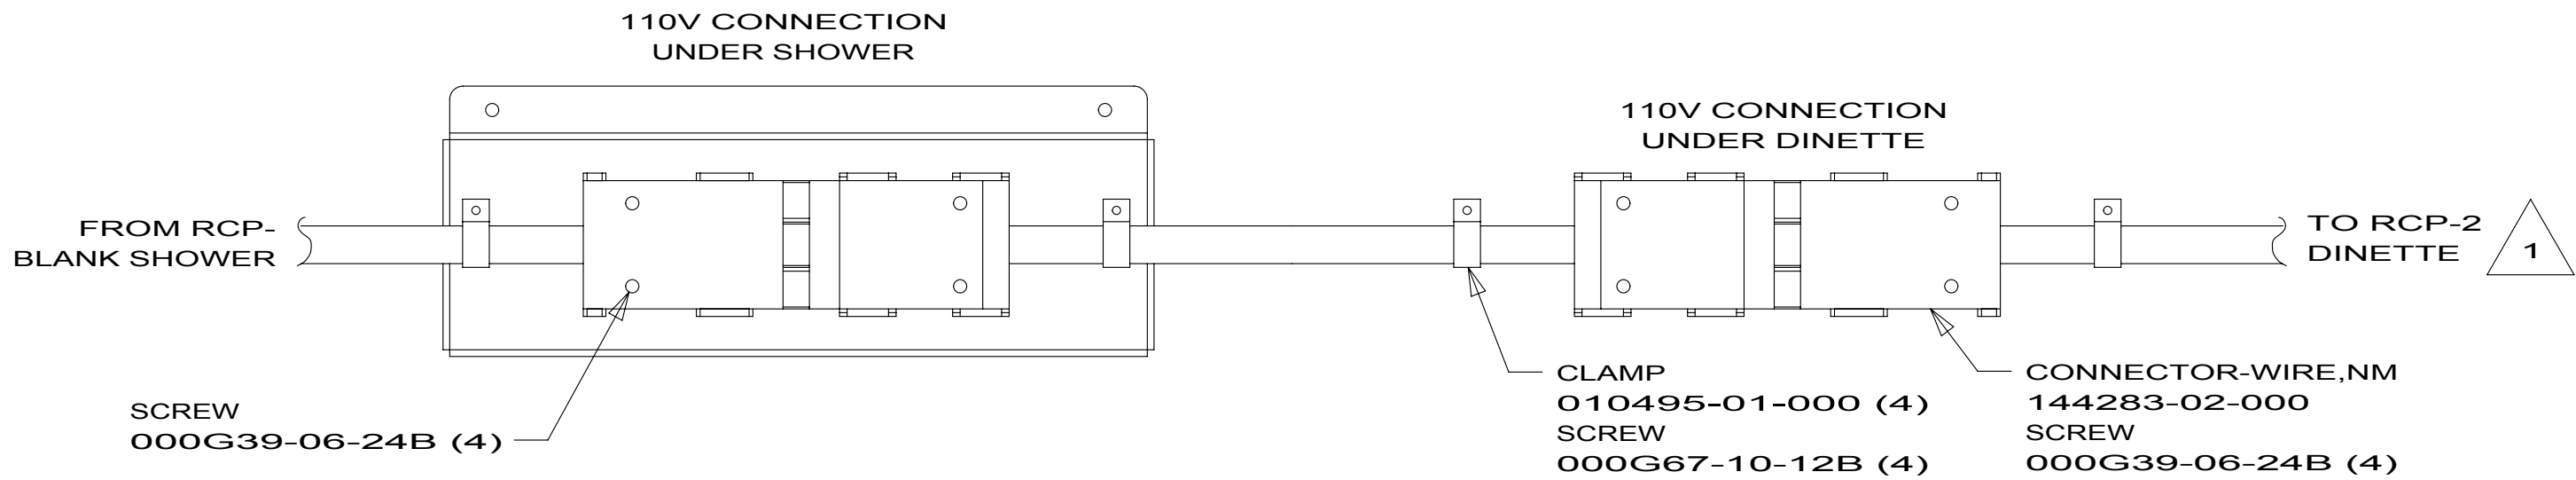

DETAIL DB

- 2** SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 1** WIRE IN SIDEWALL.

NOTES:

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- 12D** ELECTRICAL SYSTEM 30 AMP
- 265** CODES/STANDARDS-CSA/CMVSS
- 1B1** CODES/STANDARDS USA

1B1 **265** **12D**

10 728B

WIRING INSTL-BODY,110V

4

171922

KEY	PART NUMBER	U/M DESCRIPTION	083208-07-000 VENDOR NO.
	083208-06-701	EA CONVERTER ONLY (LOWER UNIT)	7345R

		329B		331C
GROUND	8-G	136145-02-015		136145-02-022
WIRE ASM 110V US		170895-01-000		170199-01-000
WIRE ASM 110V CA		170895-02-000		170199-02-000
GENEARATOR CABLE ASM	UL	136137-01-025		X
	CA	136138-01-025		X
THROW-IN #1	UL	136135-09-040 53Z		136135-09-020 53Z
	CA	136136-09-040 53Z		136136-09-020 53Z
THROW-IN #2	UL	X		136131-03-025
	CA	X		136134-03-025
THROW-IN #3	UL	X		X
	CA	X		X
THROW-IN #4	UL	X		X
	CA	X		X
THROW-IN #5	UL	X		X
	CA	X		X
THROW-IN #6	UL	X		X
	CA	X		X
THROW-IN #7	UL	X		X
	CA	X		X
SLIDEOUT WIRE #1	UL	136151-03-017 3		136151-03-020 3
	CA	136151-03-017 3		136151-03-020 3
SLIDEOUT WIRE #2	UL	X		X
	CA	X		X
MAIN EXTENSION	UL	X		X
	CA	X		X
CONDUIT		X		X

40N

40N

		224V	229T	231C	231N	231J
GROUND	8-G	136145-02-016	136145-02-012	136145-02-022	136145-02-024	136145-02-021
WIRE ASM 110V US		168359-01-000	168226-01-000	165476-01-000	169106-01-000	168597-01-000
WIRE ASM 110V CA		168359-02-000	168226-02-000	165476-02-000	169106-02-000	168597-02-000
GENEARATOR CABLE ASM	UL	8022-01-000 (4400)	X	X	X	X
	CA	24743-01-000 (4400)	X	X	X	X
CONDUIT		91234-01-000 (4000)	X	X	X	X
THROW-IN #1	UL	136135-09-067 53B	136135-09-050 53B	136131-03-012 40B	136151-03-028 3	136135-09-035 53B
	CA	136136-09-067 53B	136136-09-050 53B	136131-03-012 40B	136151-03-028 3	136136-09-035 53B
THROW-IN #2	UL	136131-02-012 1MB	X	136131-04-015 40B	136131-05-018 2	136131-03-003 2
	CA	136134-02-012 1MB	X	136134-04-015 40B	136134-05-018 2	136134-03-003 2
THROW-IN #3	UL	X	X	136135-09-018 53B	136135-09-022 53B	136131-03-071 2
	CA	X	X	136136-09-018 53B	136136-09-022 53B	136134-03-071 2
THROW-IN #4	UL	X	X	X	136131-03-050 2	X
	CA	X	X	X	136134-03-050 2	X
MAIN EXTENSION	UL	X	8022-01-000 (3400)	8022-01-000 (4000)	8022-01-000 (4600)	8022-01-000 (3500)
	CA	X	24743-01-000 (3400)	24743-01-000 (4000)	24743-01-000 (4600)	24743-01-000 (3500)
CONDUIT		X	91234-01-000 (3000)	91234-01-000 (3600)	91234-01-000 (4200)	91234-01-000 (3200)

40N

40N

40N

- 4

NOT USED WITH 1L6
- 3

FOR CONNECTOR INSTALLATION SEE DETAIL BH.
- 2

FOR CONNECTOR INSTALLATION SEE DETAIL BE.

1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

NOTES:

		728B	730C
GROUND	8-G	136145-02-023	136145-02-015
WIRE ASM 110V US		171925-01-000	166007-01-000
WIRE ASM 110V CA		171925-02-000	166007-02-000
GENEARATOR CABLE ASM	UL	X	X
	CA	X	X
THROW IN #1	UL	136135-09-040 53B	136135-09-040 53B
	CA	136136-09-040 53B	136136-09-040 53B
THROW IN #2	UL	X	X
	CA	X	X
THROW IN #3	UL	X	136135-06-004 41Q
	CA	X	136136-06-004 41Q
THROW IN #4	UL	X	136131-03-003 2
	CA	X	136134-03-003 2
SLIDEOUT WIRE #1		136151-03-020 3	136151-03-020 3

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


- 41Q SOFA/SLEEPER-ULTRALEATHER HP
- 1L6 TV-15"DC,COLOR,LCD W/REMOTE
- 1MB CUSTOM FLOORPLAN - OFFICE
- 40B INVERTER-DC/AC, 300 WATT
- 53Z WTR HTR-6GAL/110/LP/MTR/AUTO
- 53B WTR HTR-6GAL ELECTRIC/LP GAS
- 23T DRAINAGE SYSTEM-HEATED
- 40N GEN-4.0KW-ONANGAS-MICROQUIET
- 1L6 TV-15"DC,COLOR,LCD W/REMOTE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


1B1 265

10 200/300/700

LOAD CENTER/ATS ASM

1 3 170018

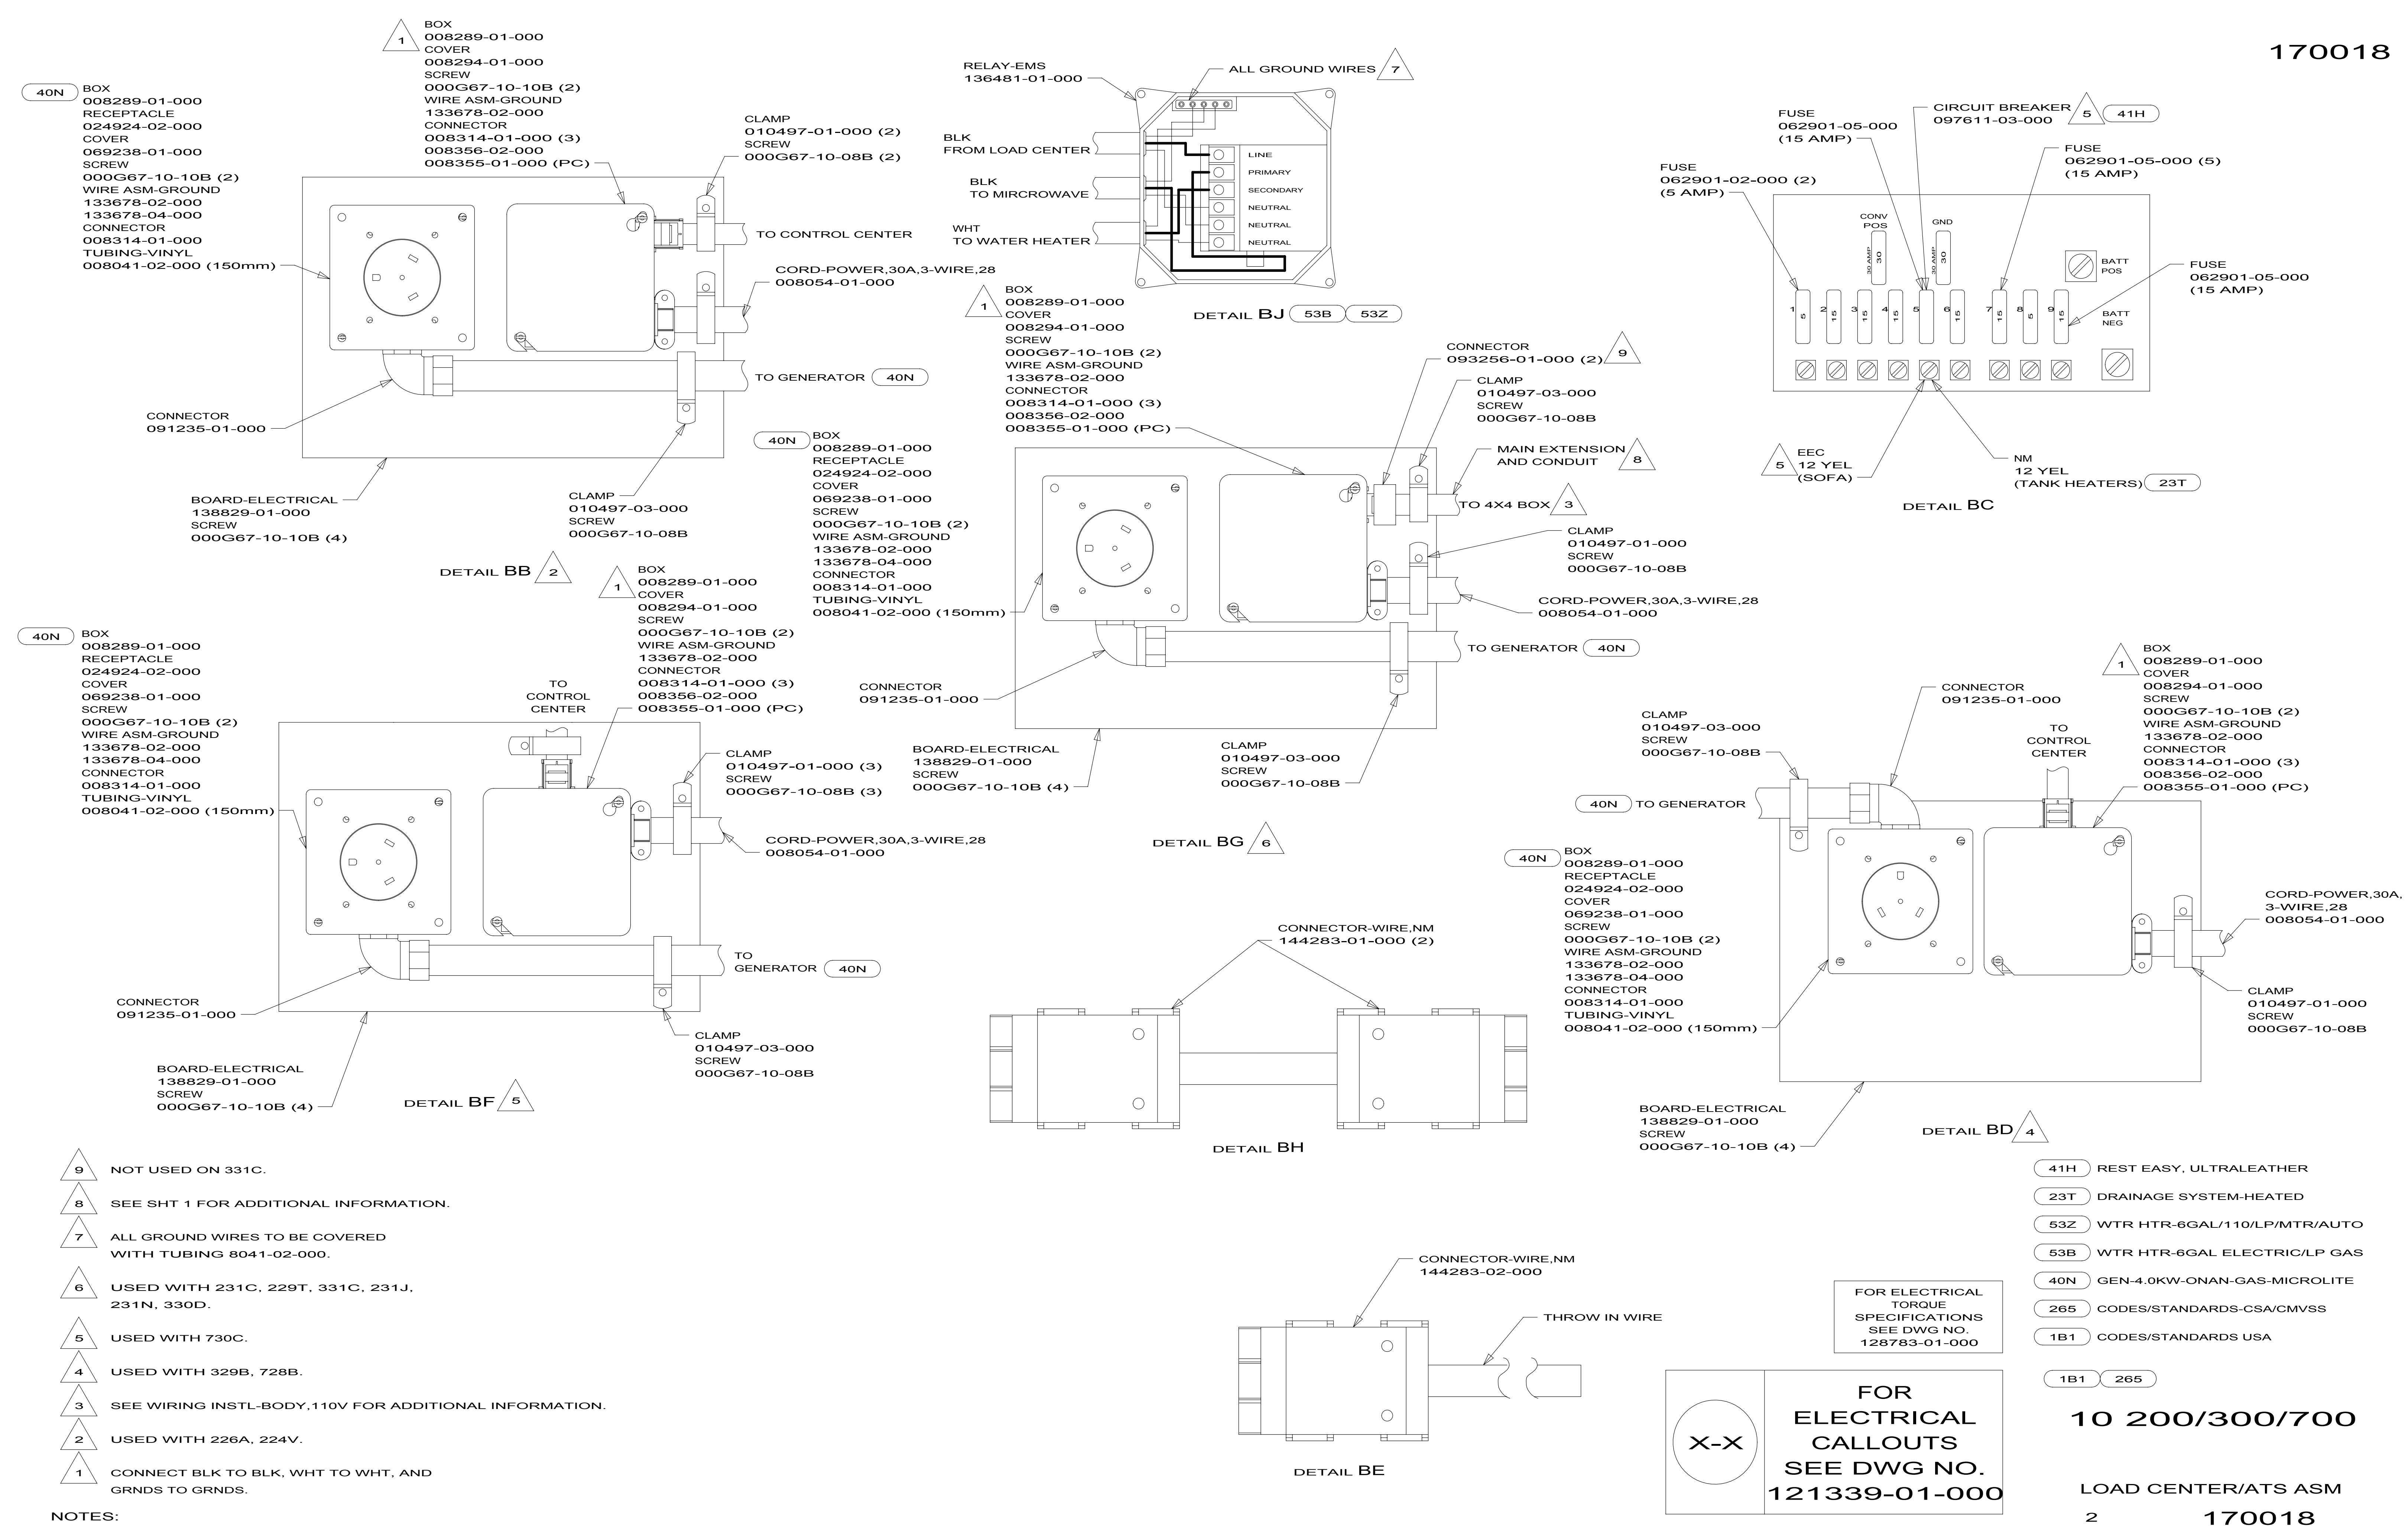

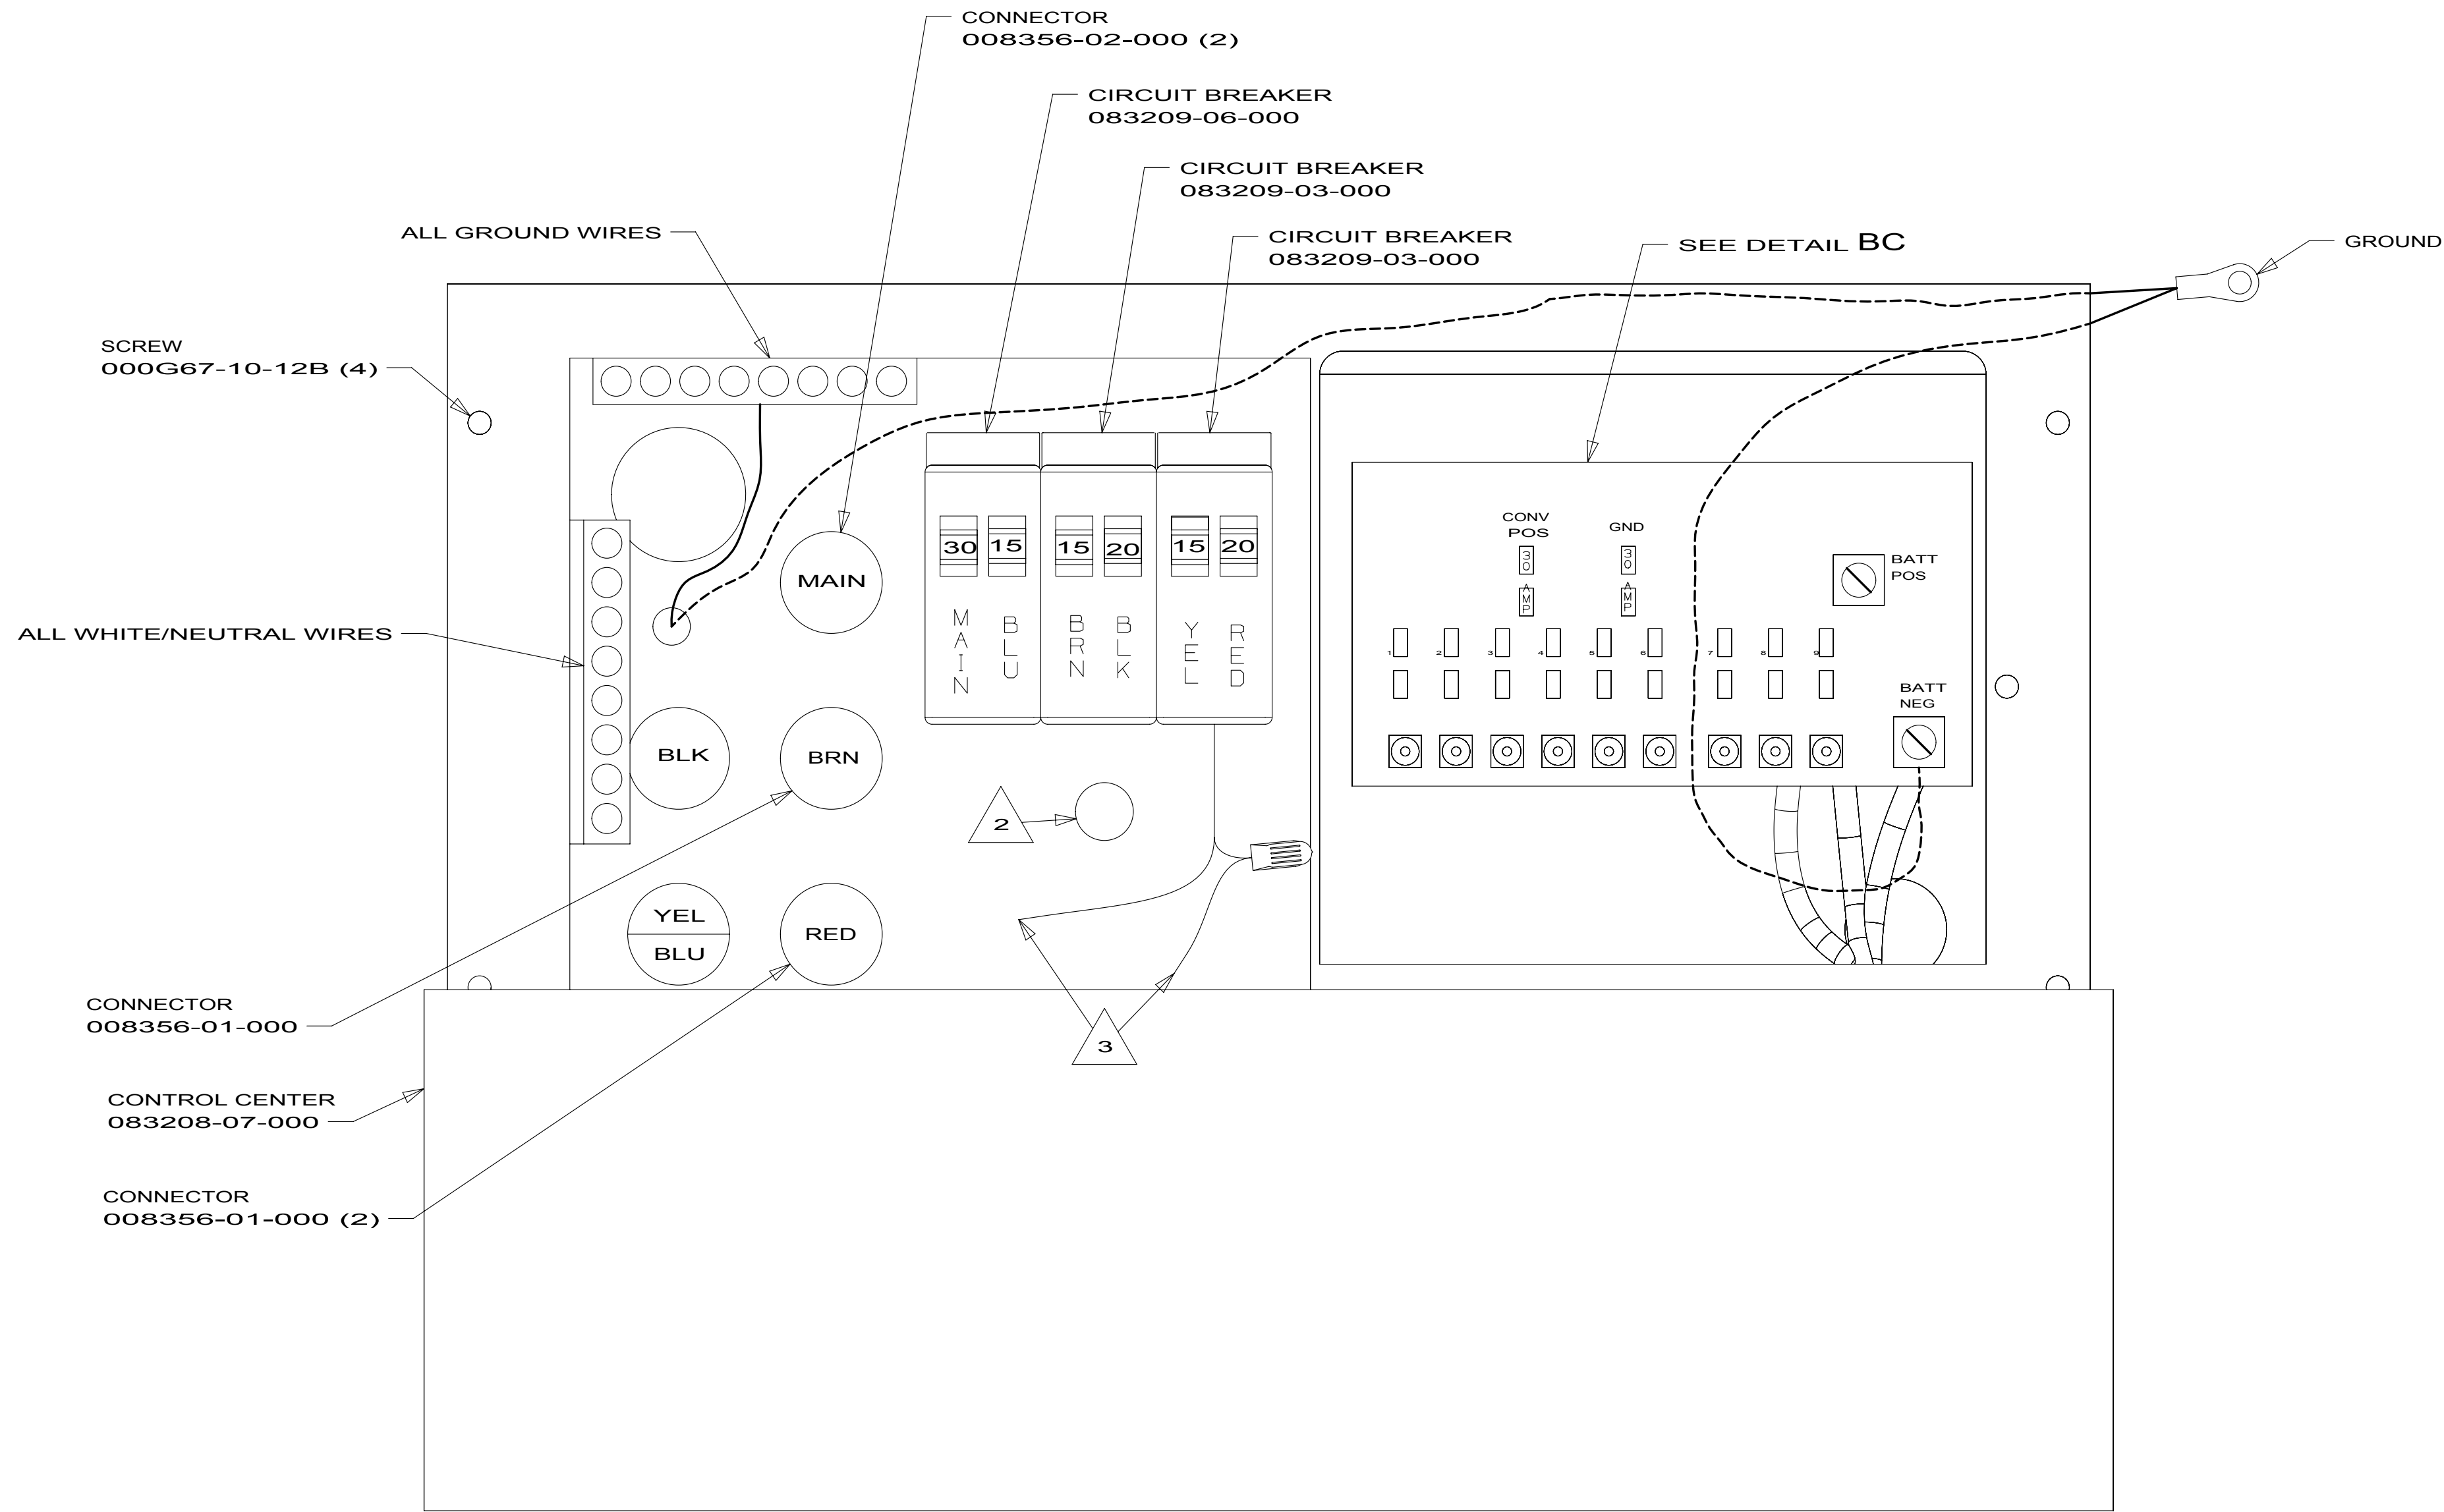

3 CONNECT CONVERTER POWER INTO YELLOW BREAKER AND USE SUPPLIED WIRE NUT TO CONNECT YELLOW CIRCUIT.

2 SECURE WIRES TO BACKSIDE OF LOAD CENTER WITH WIRE TIE 116673-01-000.

1. ALL GROUND WIRES TO BE COVERED WITH TUBING 008041-02-000.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

10 200/300/700


LOAD CENTER/ATS ASM

3


170018

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

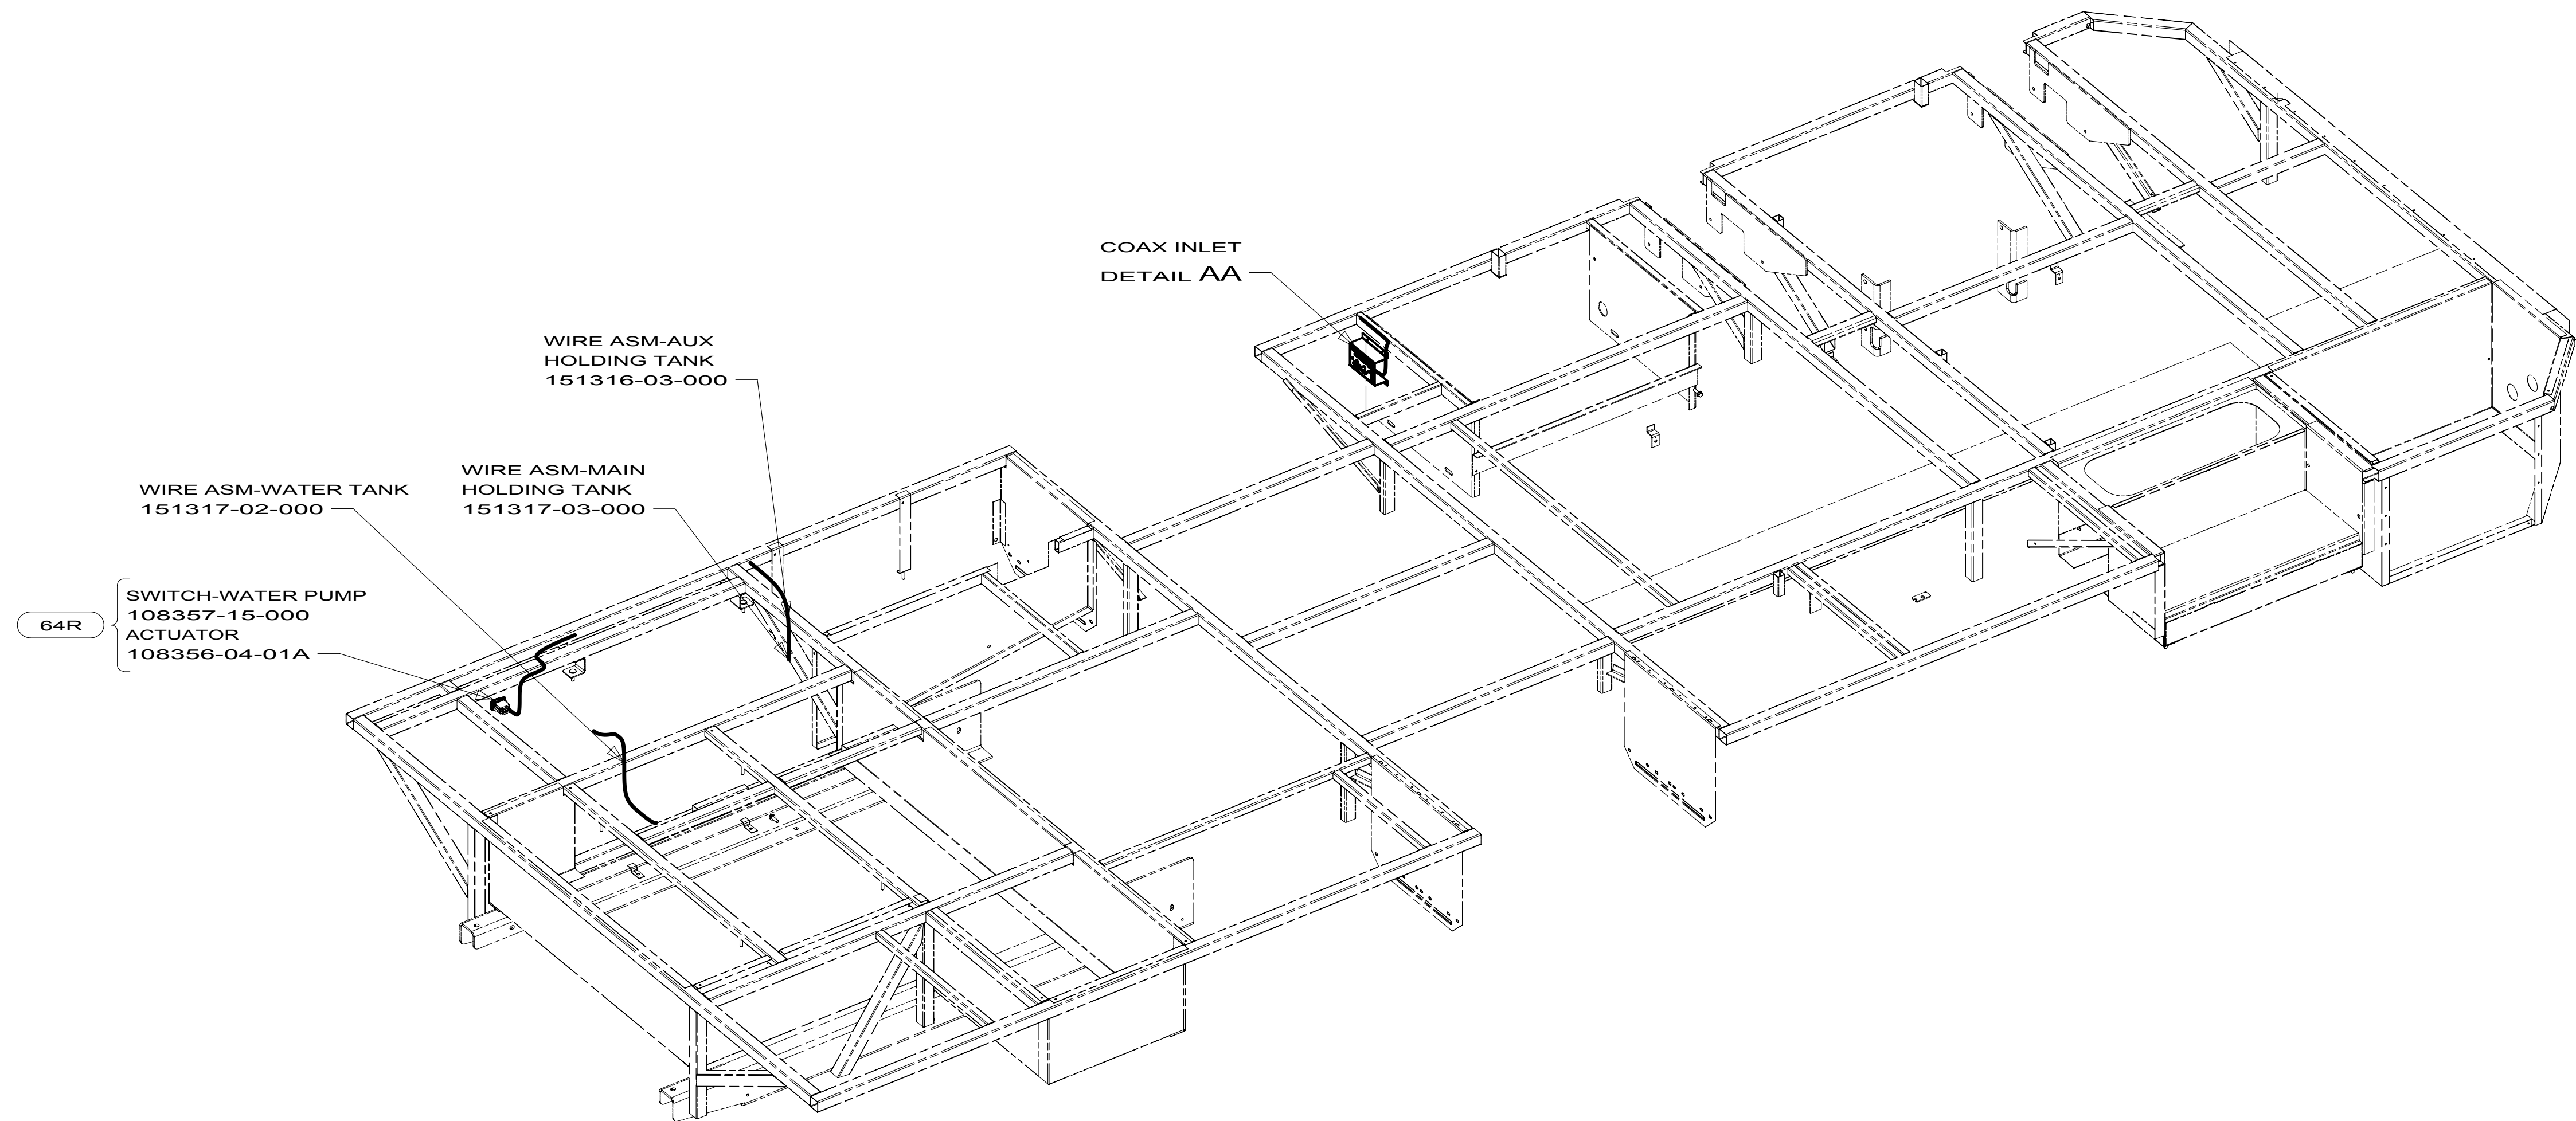

- 64R EXTERIOR WASH STATION
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

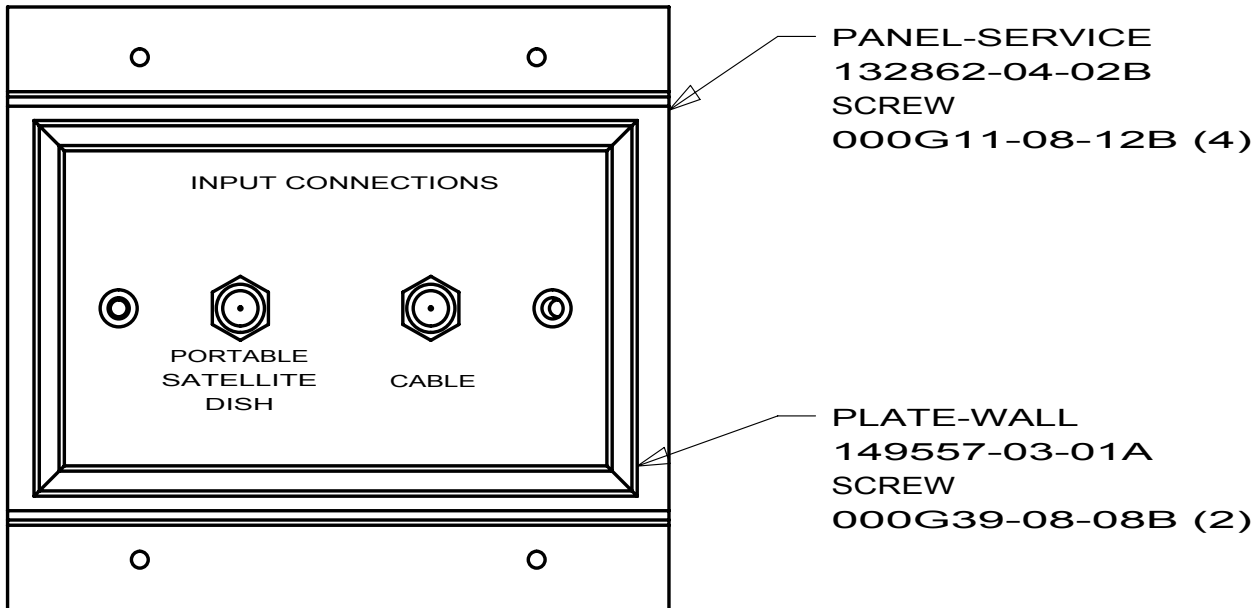

DETAIL AA

X-X

**FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000**


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

10 728B

2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASSOVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 008343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIME WITH PRIMER 94
1. ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

WIRING INSTL-BODY,12V
1 6 171920

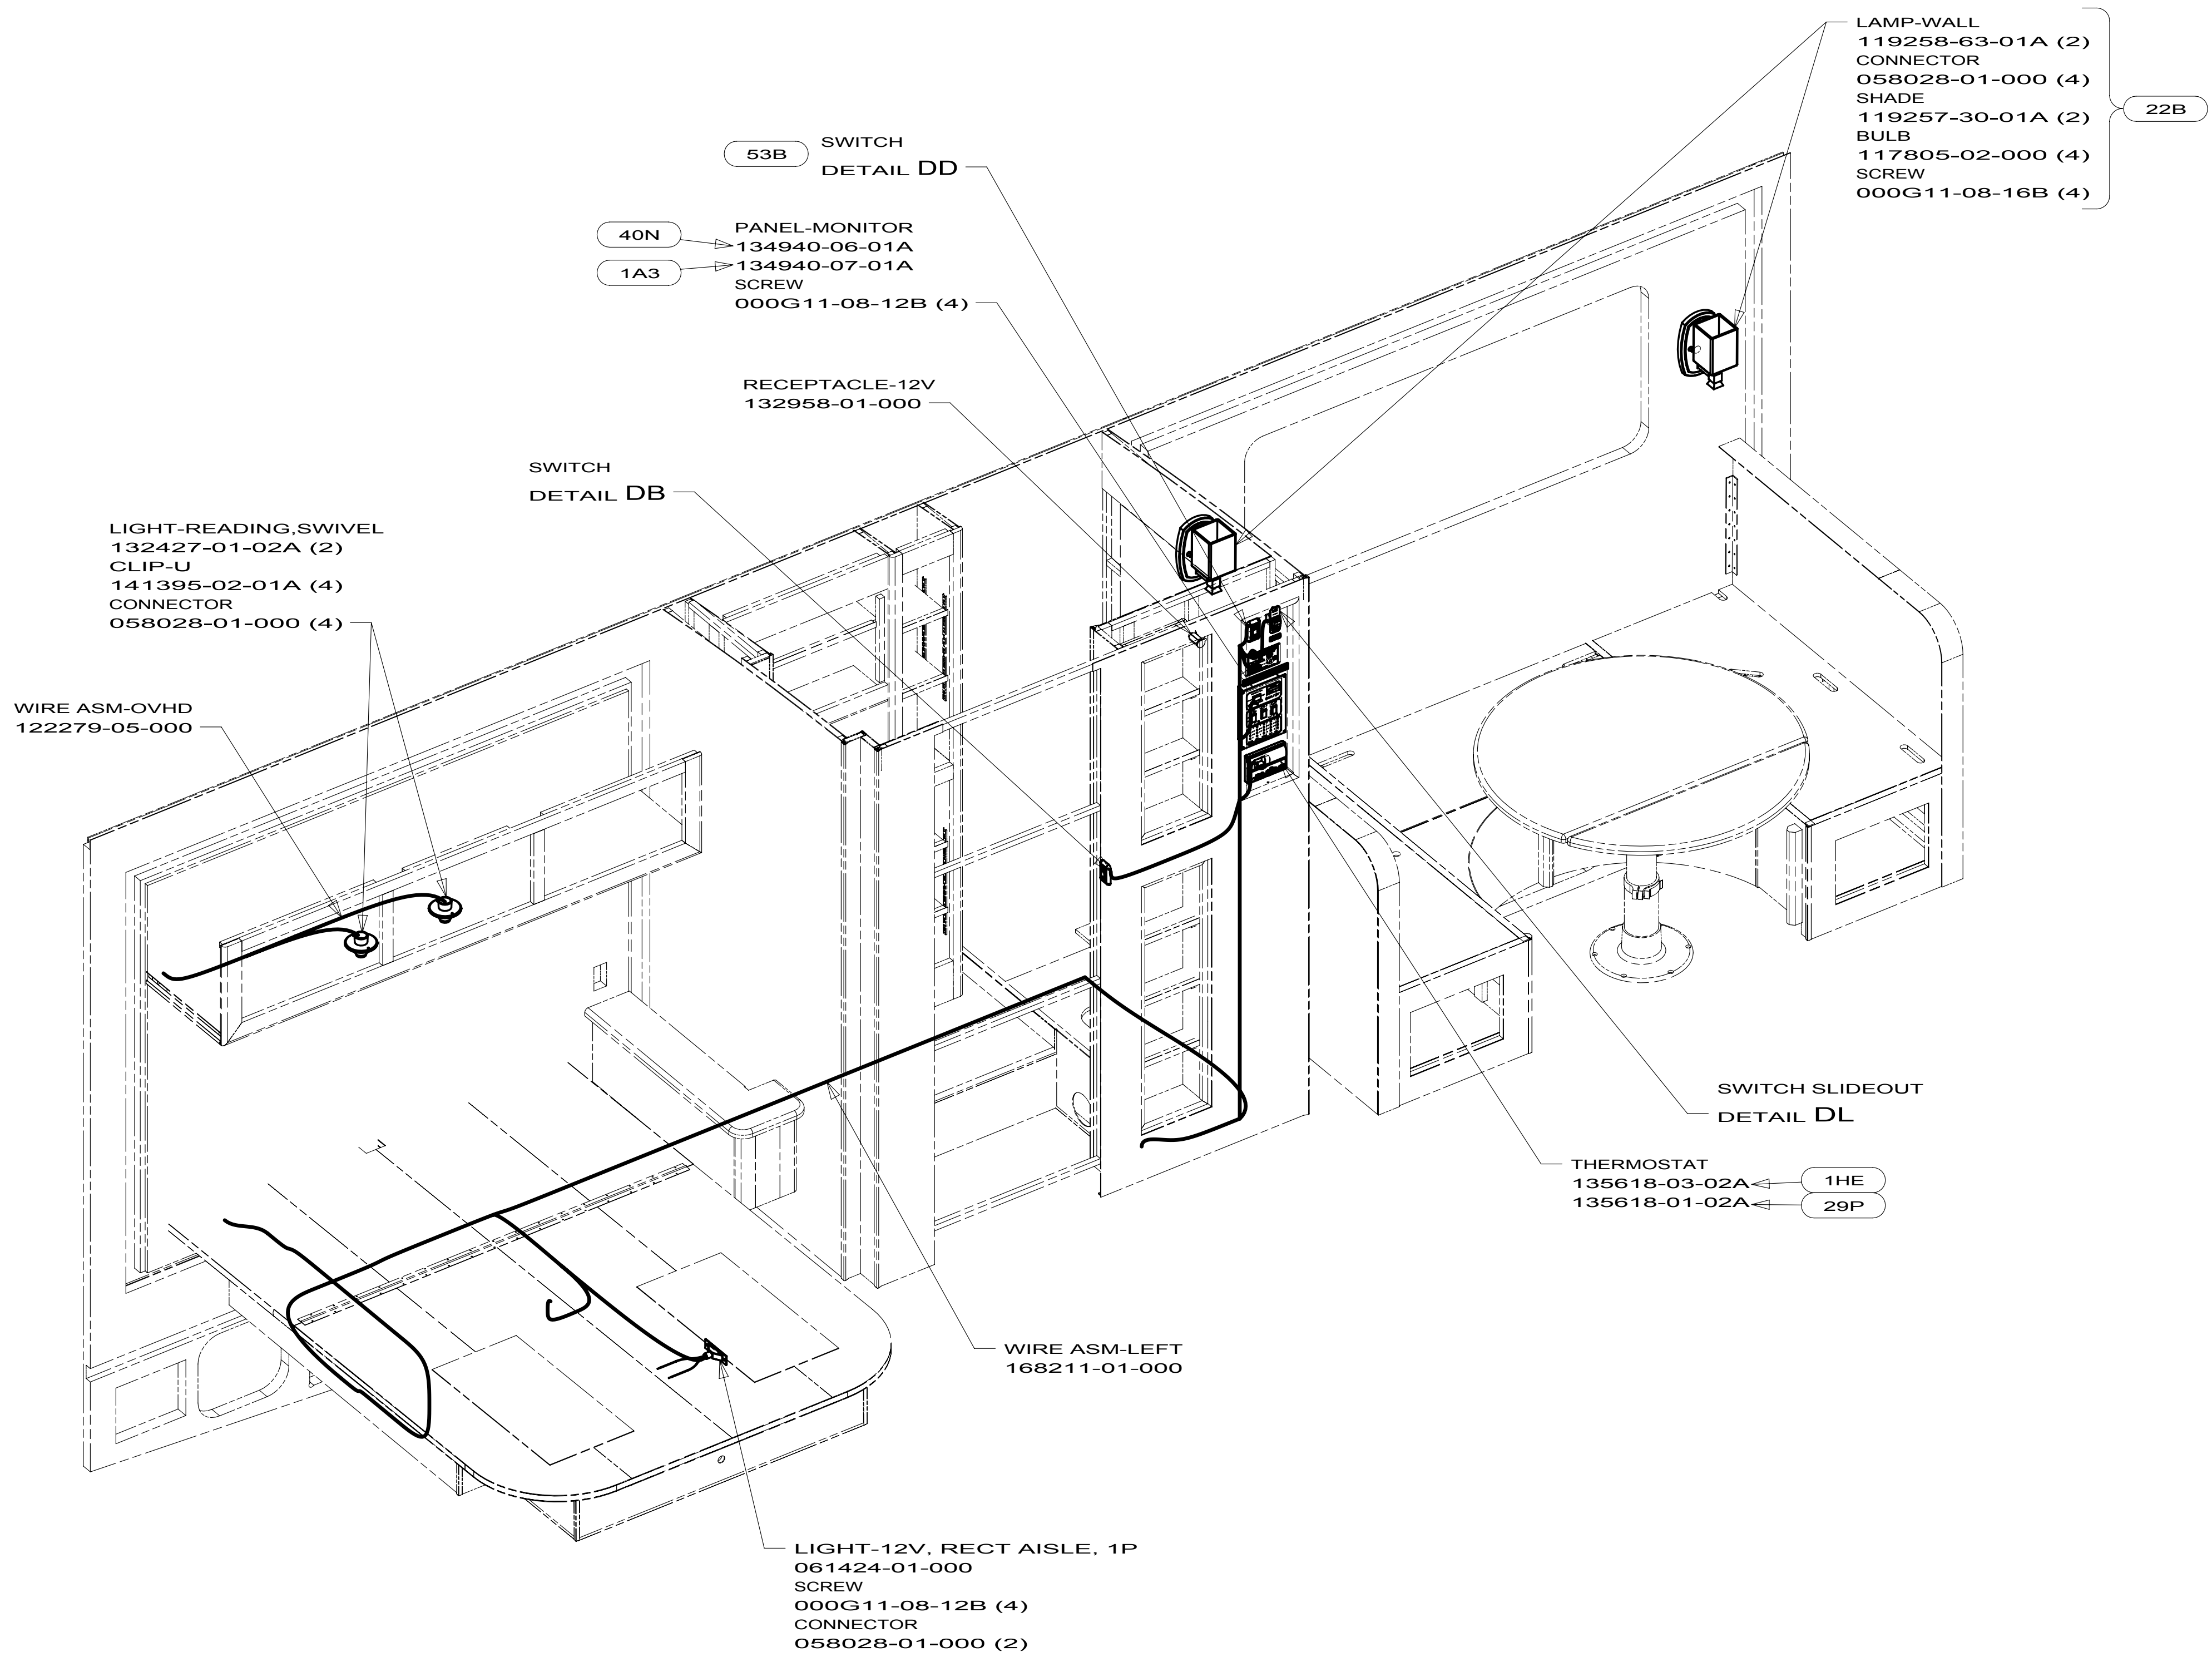

1. ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

X-X


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- 53B WTR HTR-6GAL ELECTRIC/LP GAS
- 40N GEN-4.0KW-ONANGAS-MICROQUIET
- 29P AC HEAT PUMP-HI EFF, LOW PFL
- 22B DINETTE - U-SHAPED
- 1HE A/C ROOF-HI EFF LOW PROFILE
- 1A3 GENERATOR WITHOUT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

10 728B


WIRING INSTL-BODY, 12V

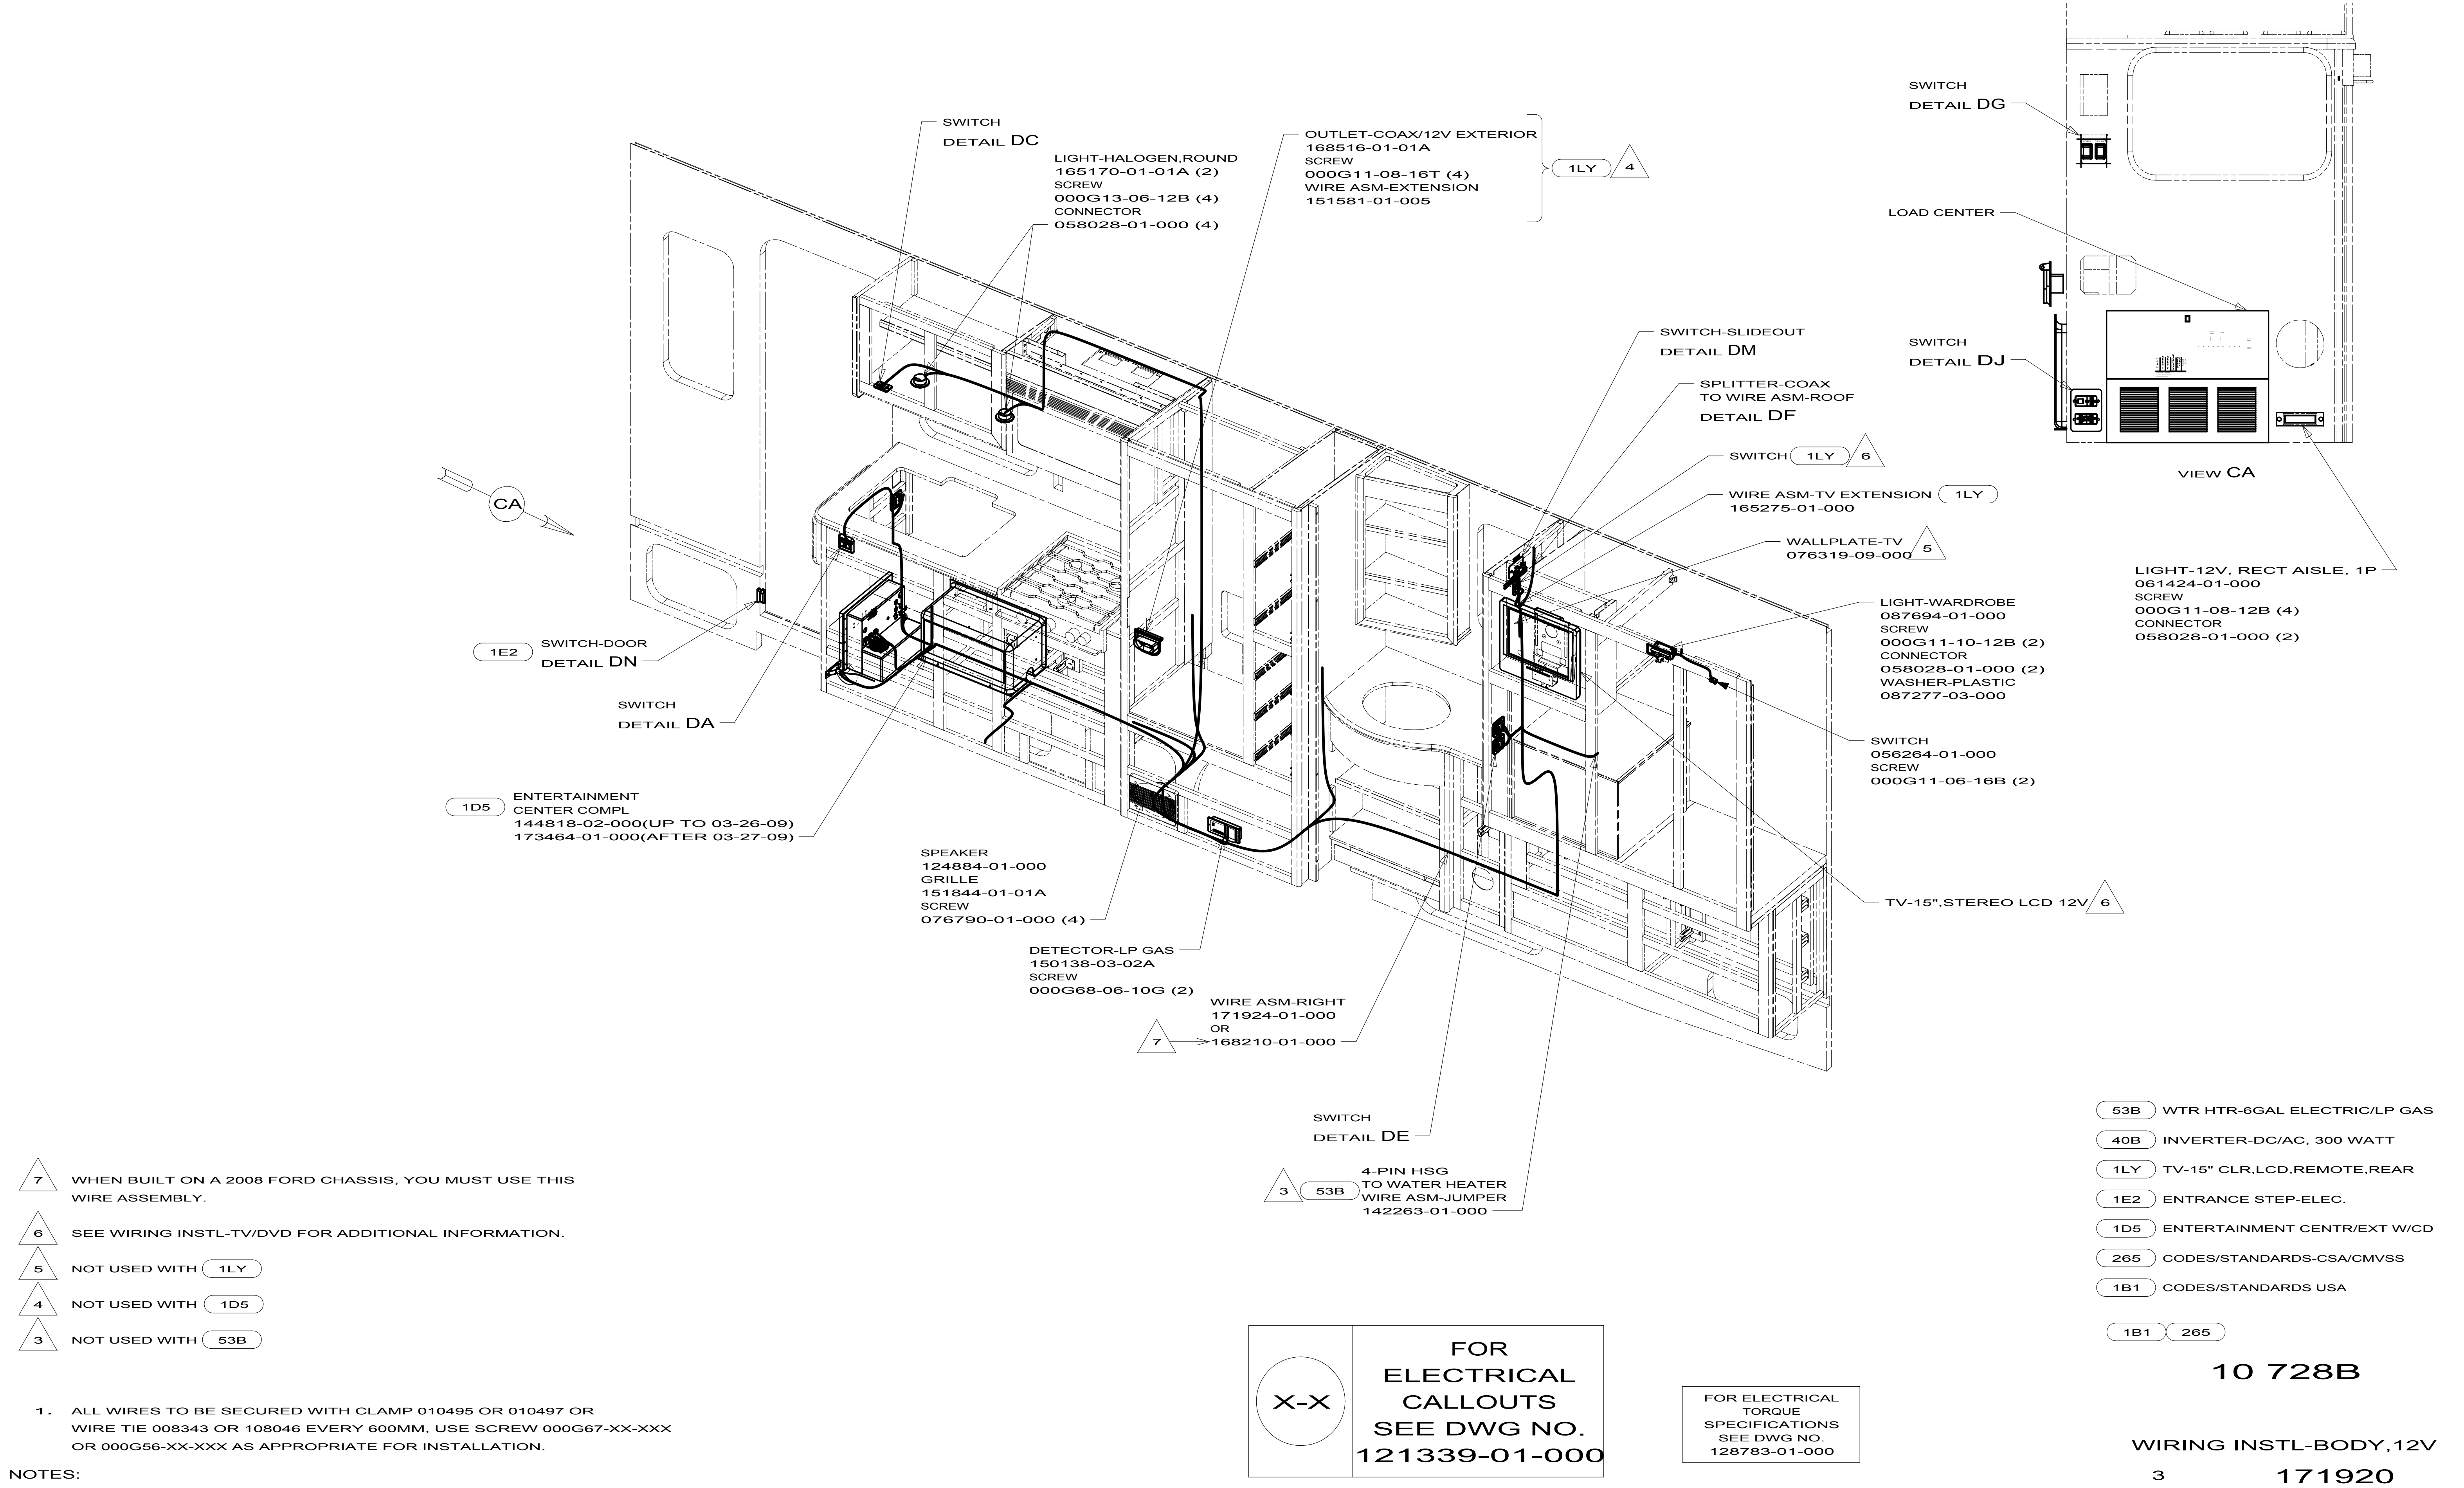

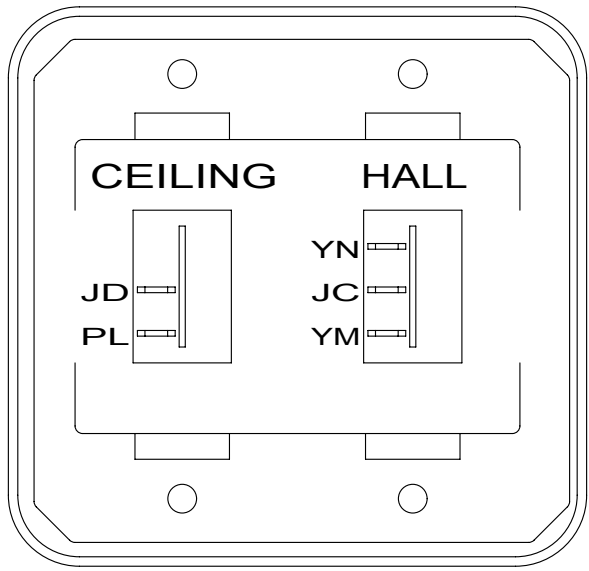


SWITCH-ROCKER
135740-01-01A
135740-02-01A
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-16-02A
SCREW
000G11-08-08B (4)

DETAIL DA

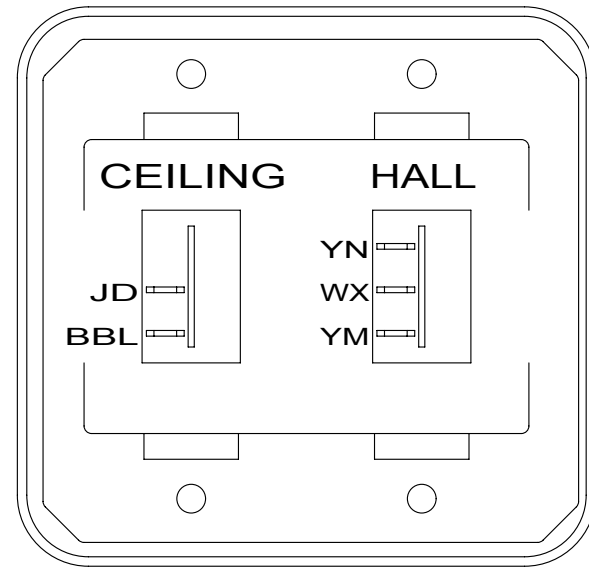


SWITCH-ROCKER
135740-01-01A
135740-02-01A
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-16-02A
SCREW
000G11-08-08B (4)

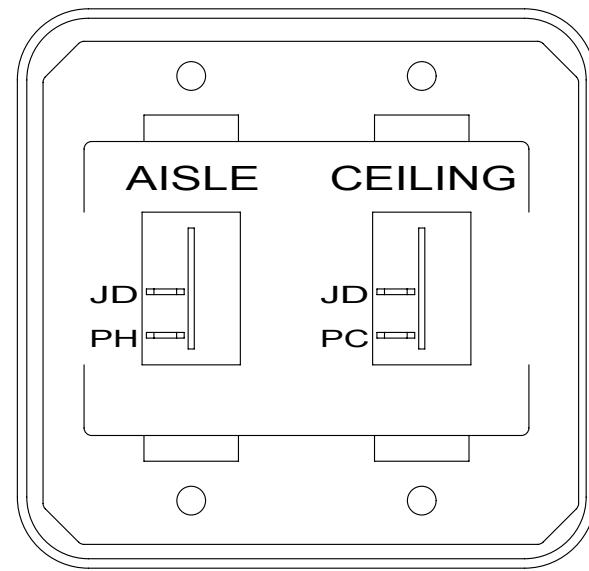


SWITCH-ROCKER
135740-01-01A (2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-13-02A
SCREW
000G11-08-08B (4)

DETAIL DE

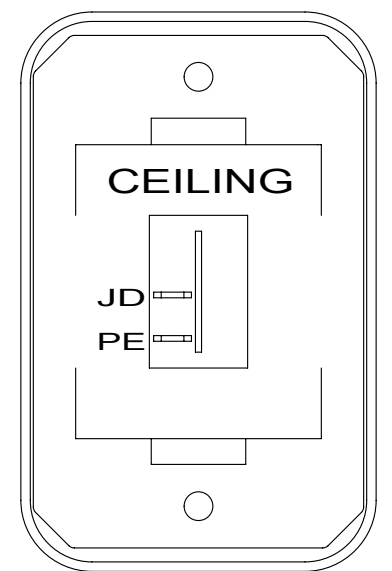


SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-07-02A
SCREW
000G11-08-08B (2)

DETAIL DB

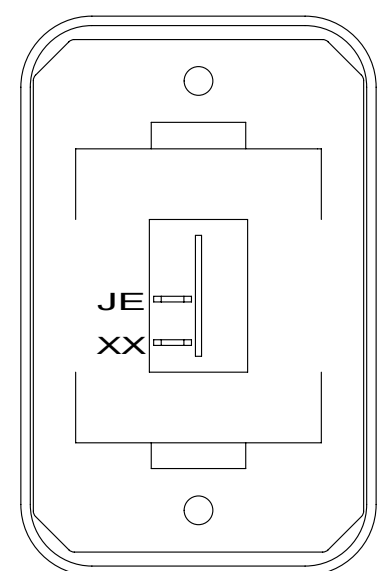


SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-01-01A
SCREW
000G11-08-08B (2)

DETAIL DC

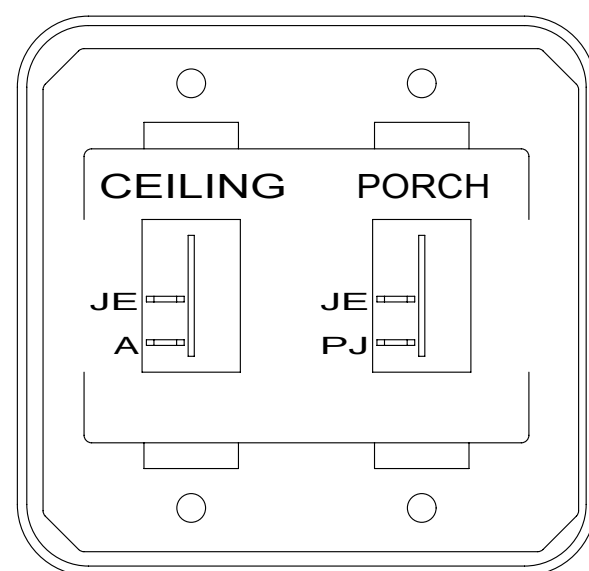

SWITCH-ROCKER
135740-01-01A (2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-19-02A
SCREW
000G11-08-08B (4)

DETAIL DG

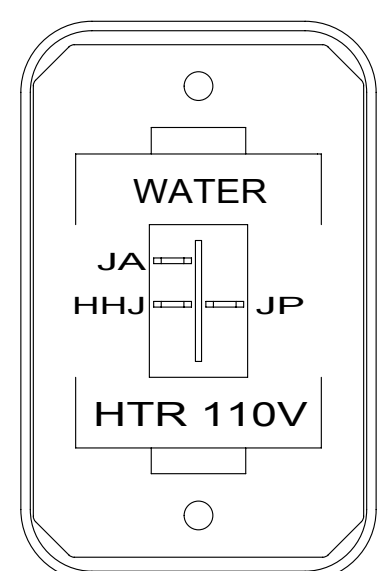

SWITCH-ROCKER
135740-06-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-35-CHT
SCREW
G11-08-08U (2)

DETAIL DD 53B

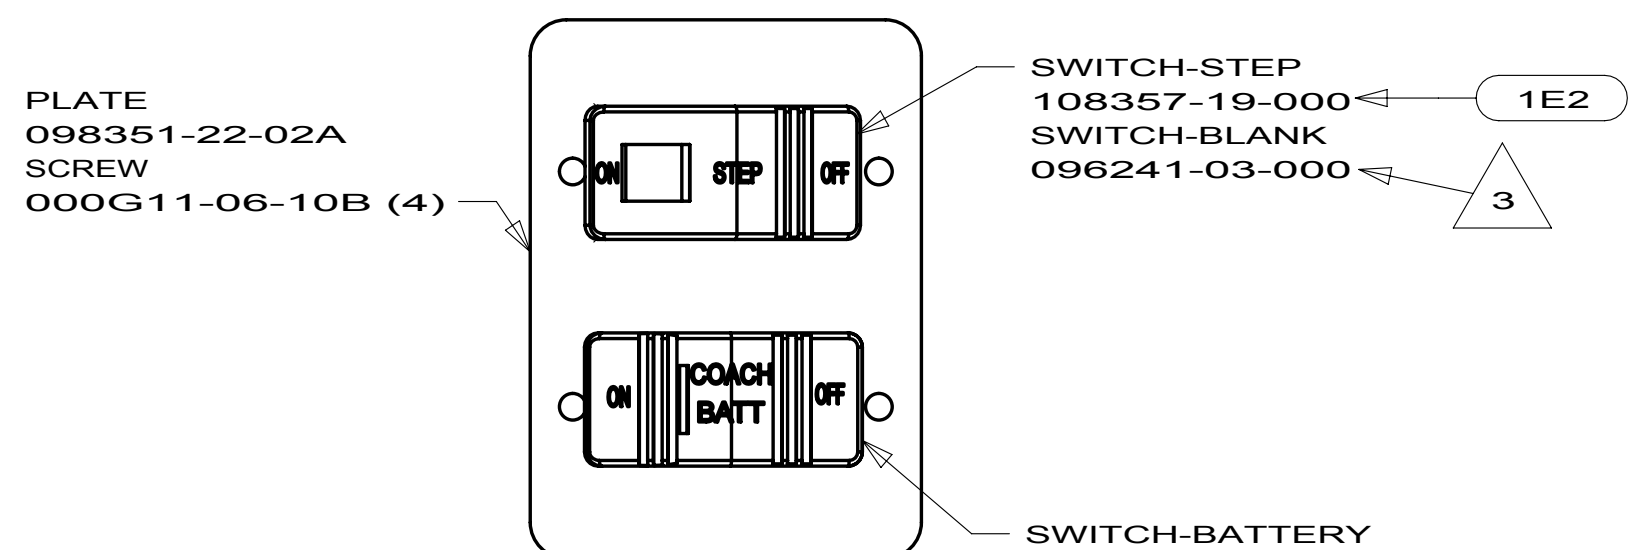


PLATE
098351-22-02A
SCREW
000G11-06-10B (4)

SWITCH-STEP
108357-19-000
SWITCH-BLANK
096241-03-000

1E2

3

SWITCH-BATTERY
108357-17-000
ACTUATOR
108356-19-01A

DETAIL DJ

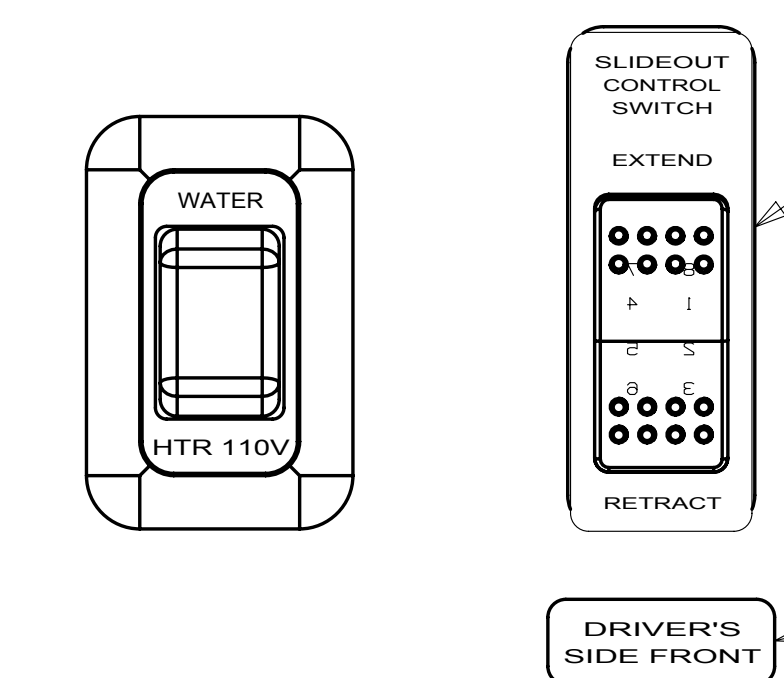


PLATE-SWITCH
144363-09-02B
SWITCH
108357-06-000
ACTUATOR
108356-02-01A
NUT
000D65-08-00B (2)
LABEL
116220-01-000

LABEL
163992-01-01A


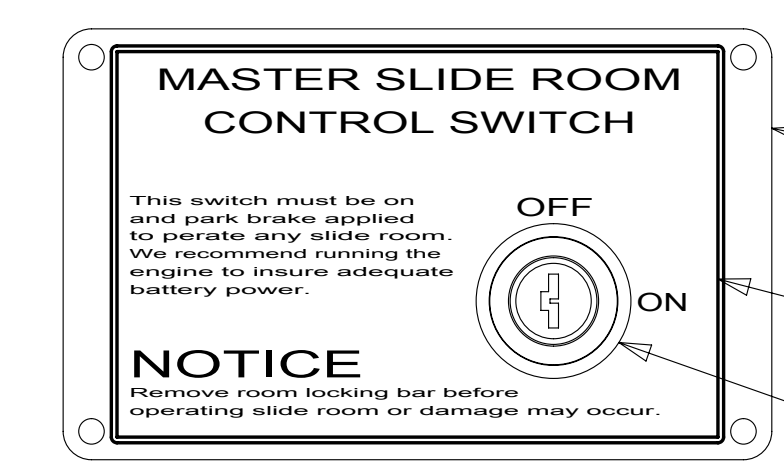


PLATE KEY SLIDEROOM
163987-01-02B
SCREW
076790-05-000 (4)
LABEL-SLIDEROOM CONTROL
163988-01-01A
SWITCH-KEYLOCK
163097-01-000

WARNING CRUSH HAZARD. Keep people and objects clear of the inside and the outside of the slideout room when operating. Failure to comply could result in death or serious injury.

LABEL-WARNING
116549-01-000

DETAIL DL

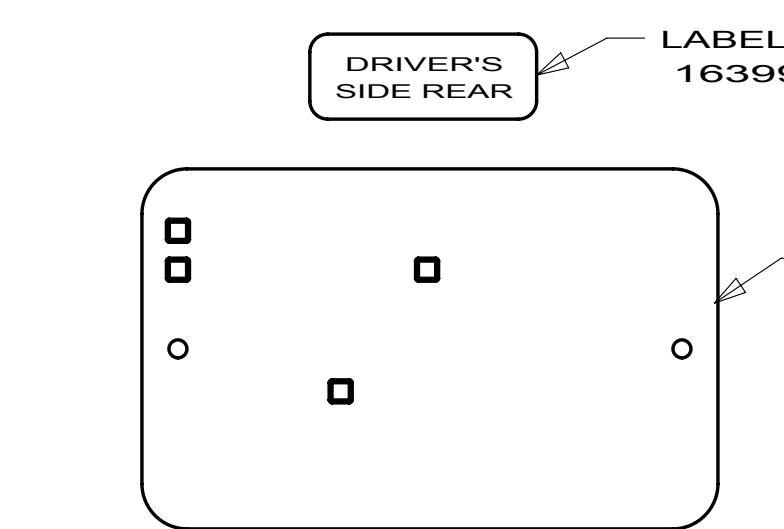


LABEL-SLIDEOUT
163992-02-01A

SWITCH ASM-SLIDEOUT
171341-01-000
LABEL-WARNING
116549-01-000

WARNING CRUSH HAZARD. Keep people and objects clear of the inside and the outside of the slideout room when operating. Failure to comply could result in death or serious injury.

LABEL-WARNING
116549-01-000


DETAIL DM

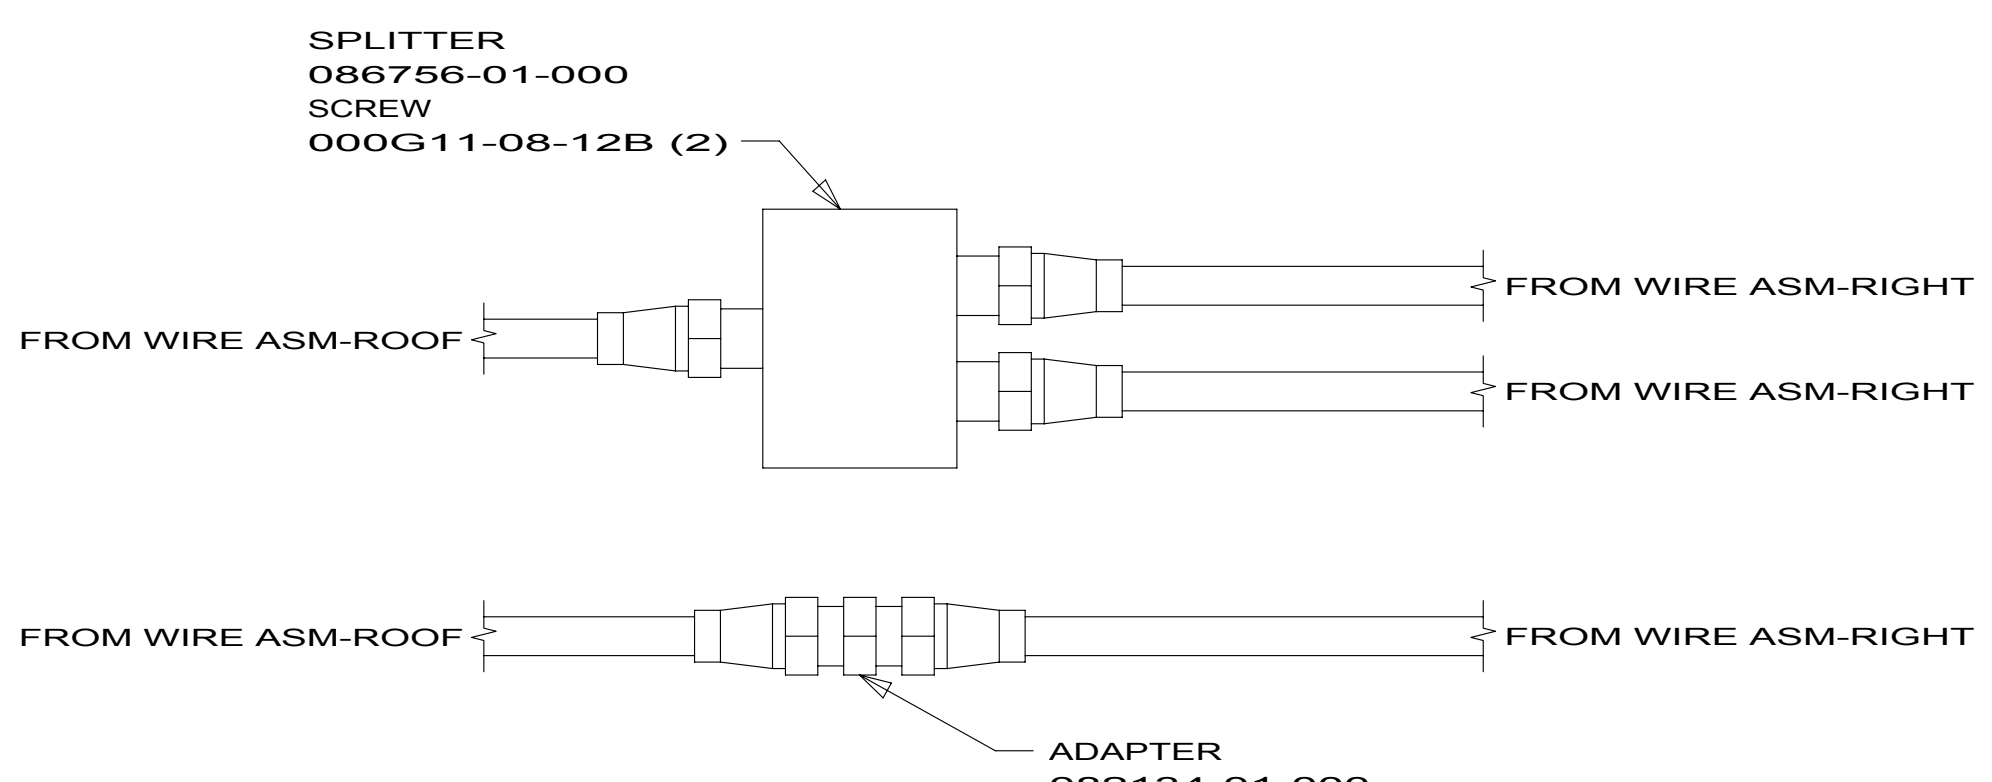

SPLITTER
086756-01-000
SCREW
000G11-08-12B (2)

ADAPTER
082134-01-000

DETAIL DF

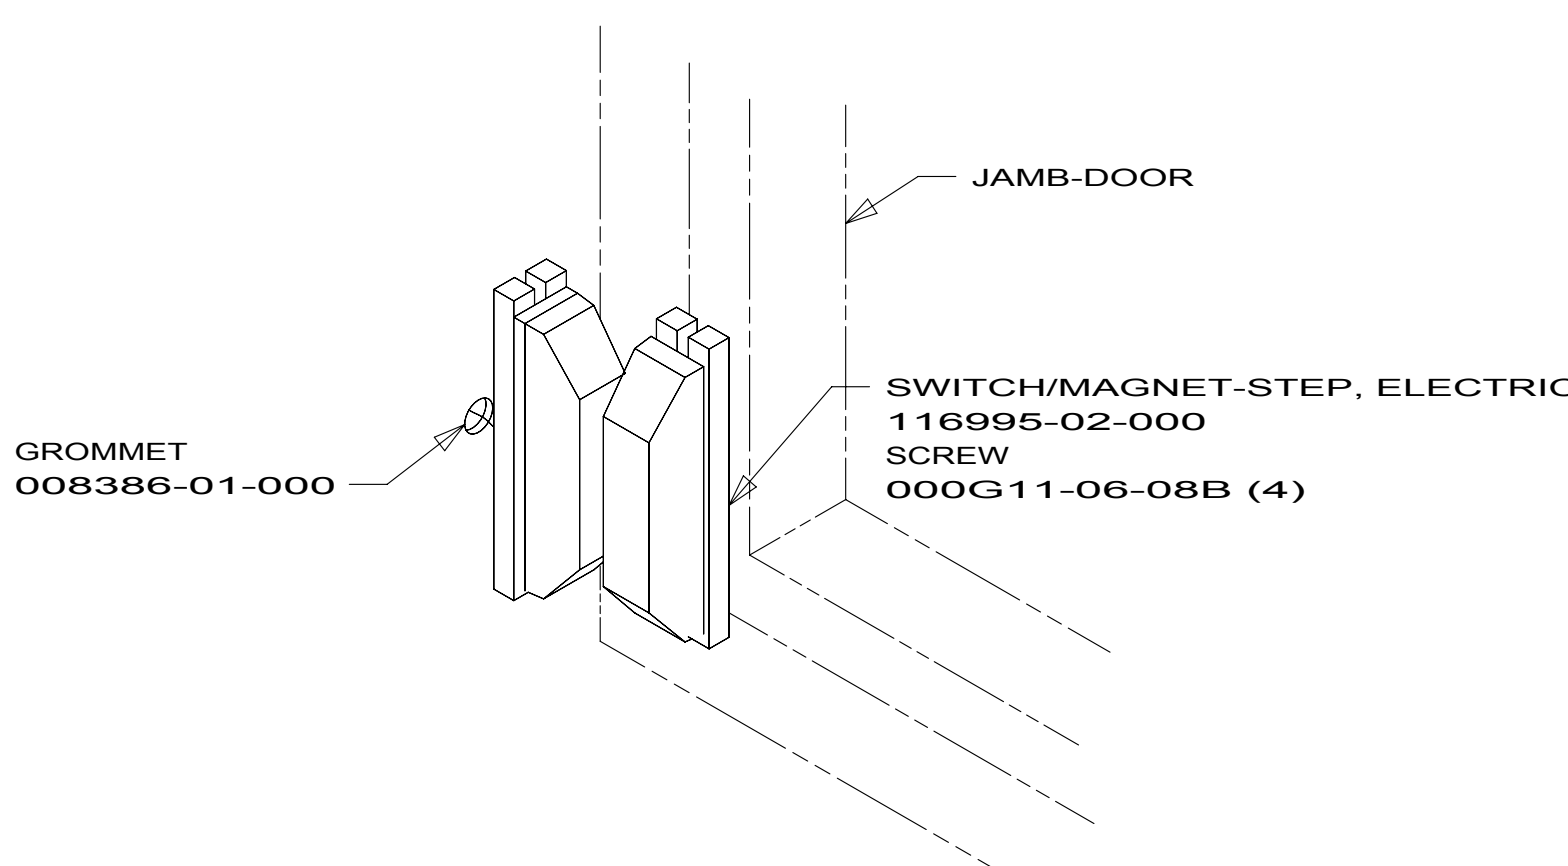

JAMB-DOOR

SWITCH/MAGNET-STEP, ELECTRIC
116995-02-000
SCREW
000G11-06-08B (4)

GROMMET
008386-01-000

DETAIL DN 1E2

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 1LY TV-15" CLR,LCD,REMOTE,REAR
- 53B WTR HTR-6GAL ELECTRIC/LP GAS
- 1E2 ENTRANCE STEP-ELEC.
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


1B1 265

10 728B

WIRING INSTL-BODY,12V

NOT USED WITH 1E2

NOTES:

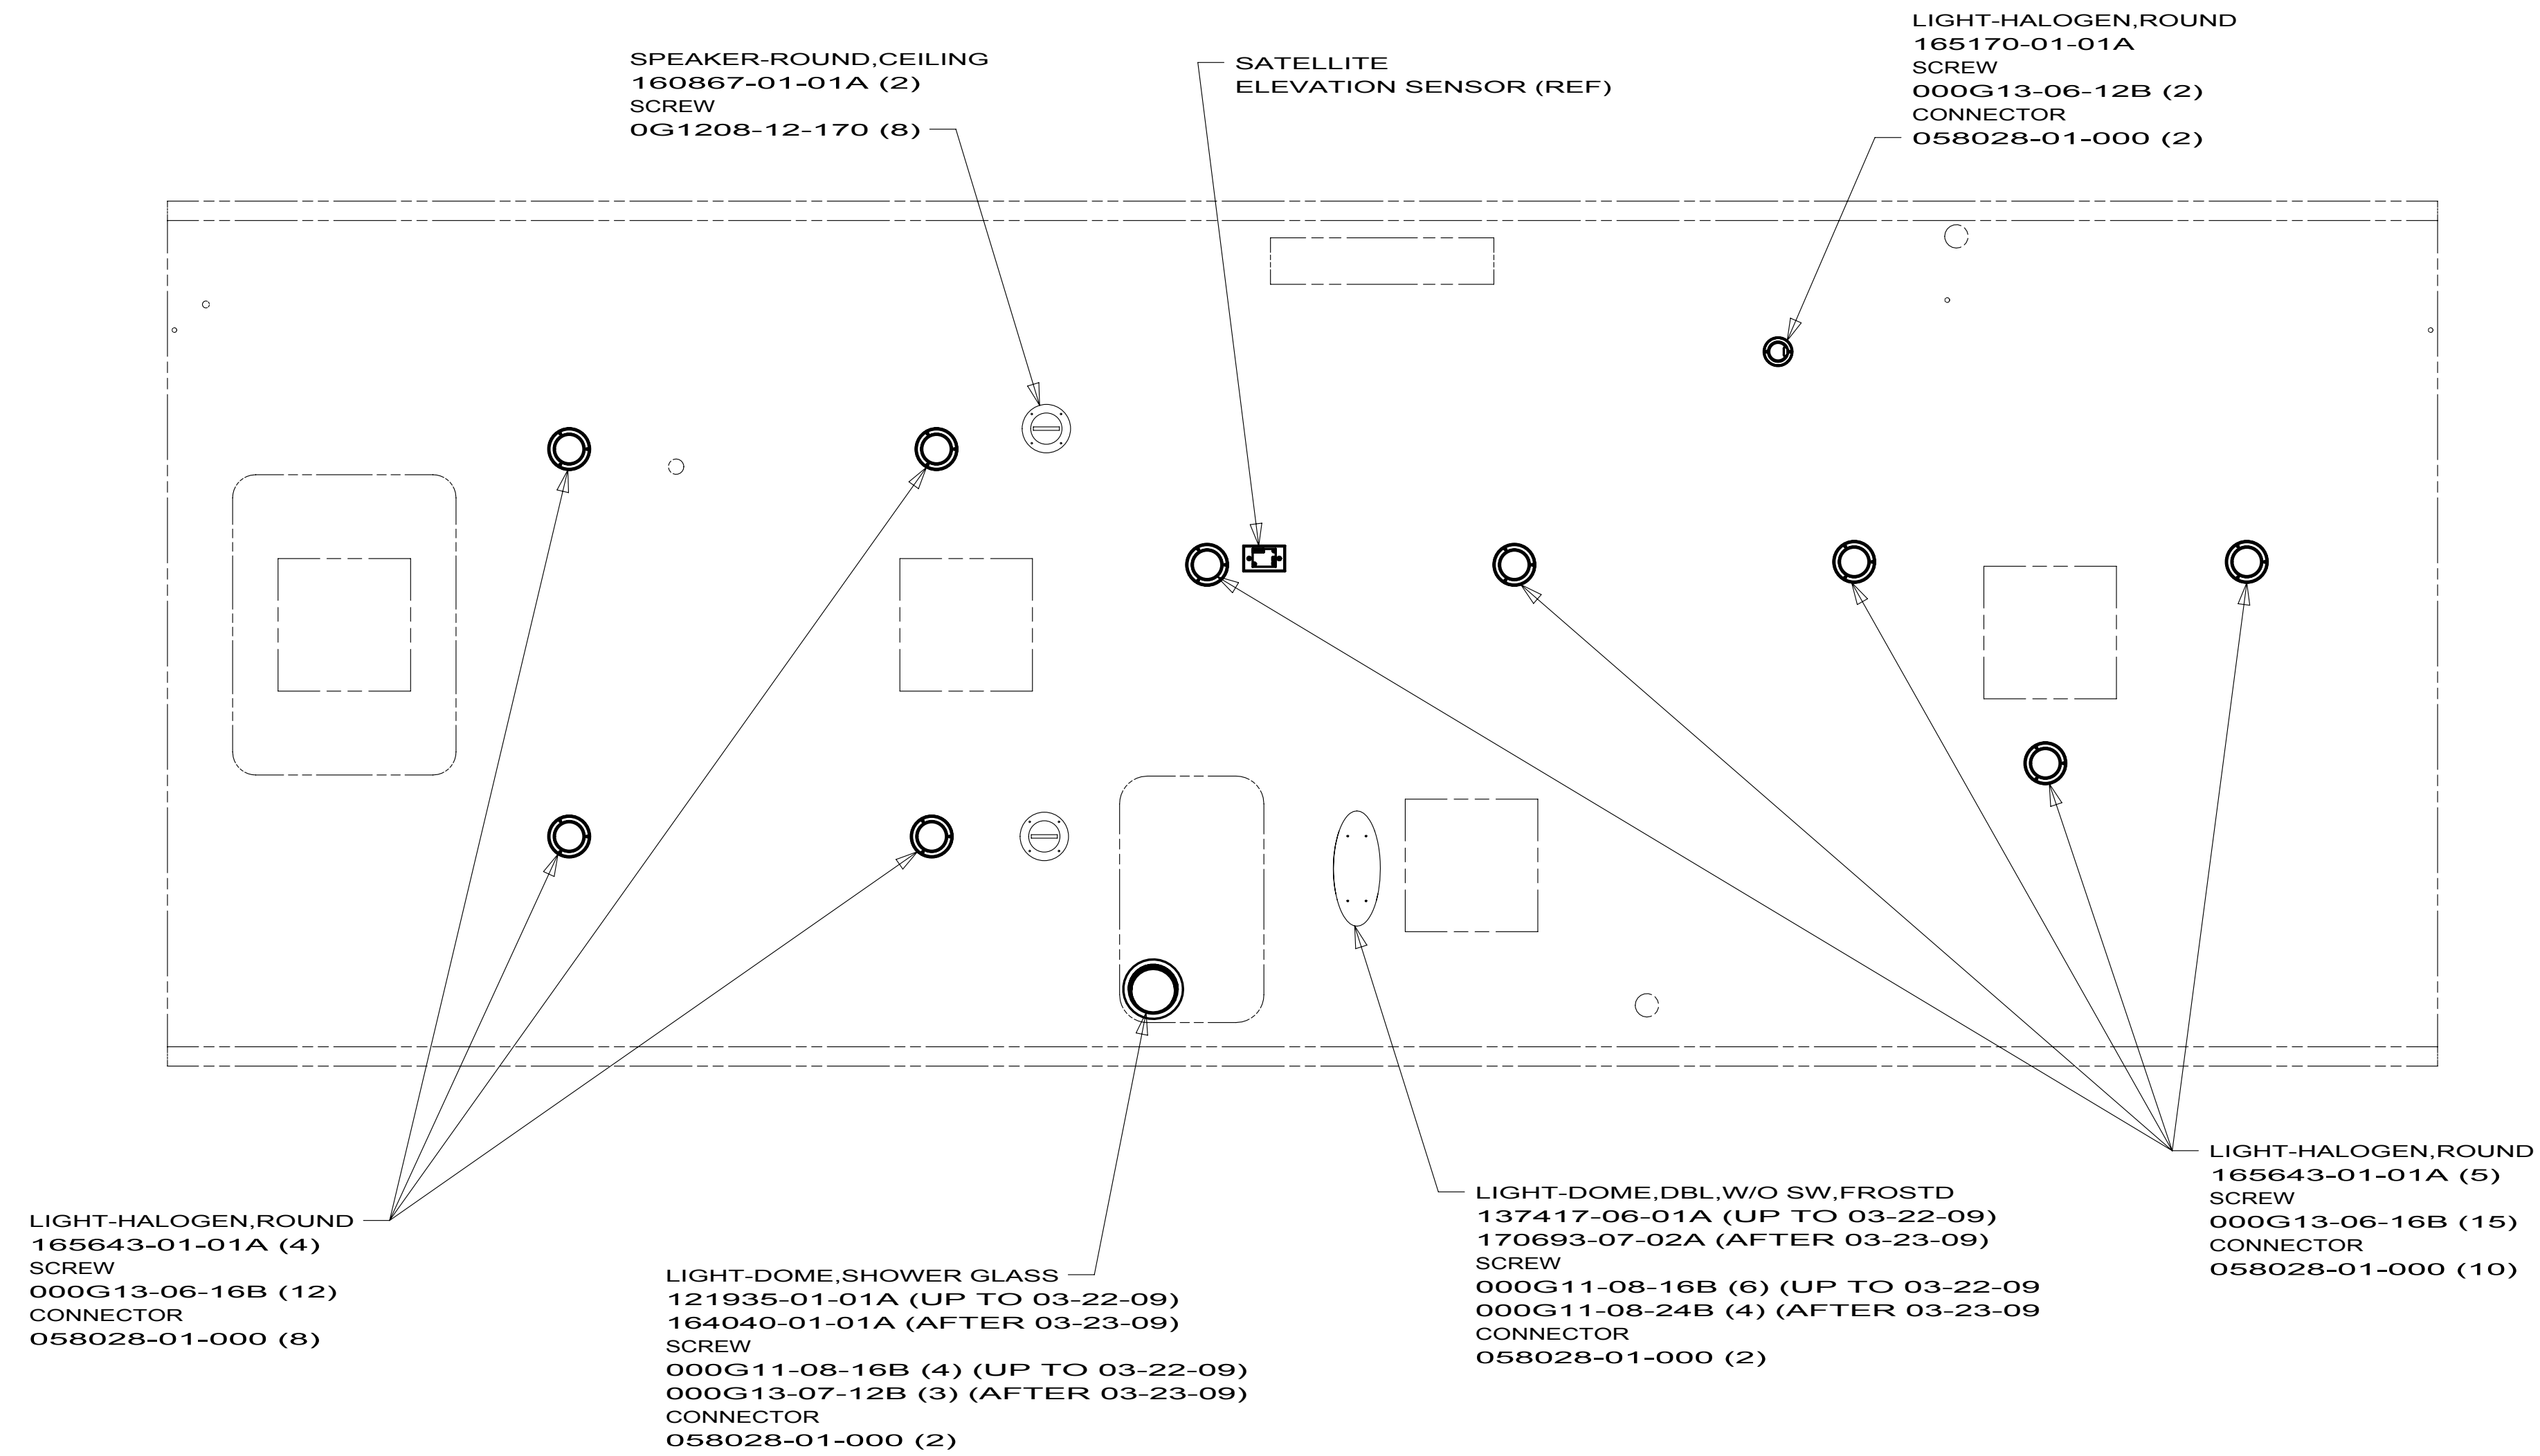

**FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000**

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

48Q SATELLITE DISH & ELEV.SENSOR


265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

10 728B

WIRING INSTL-BODY,12V

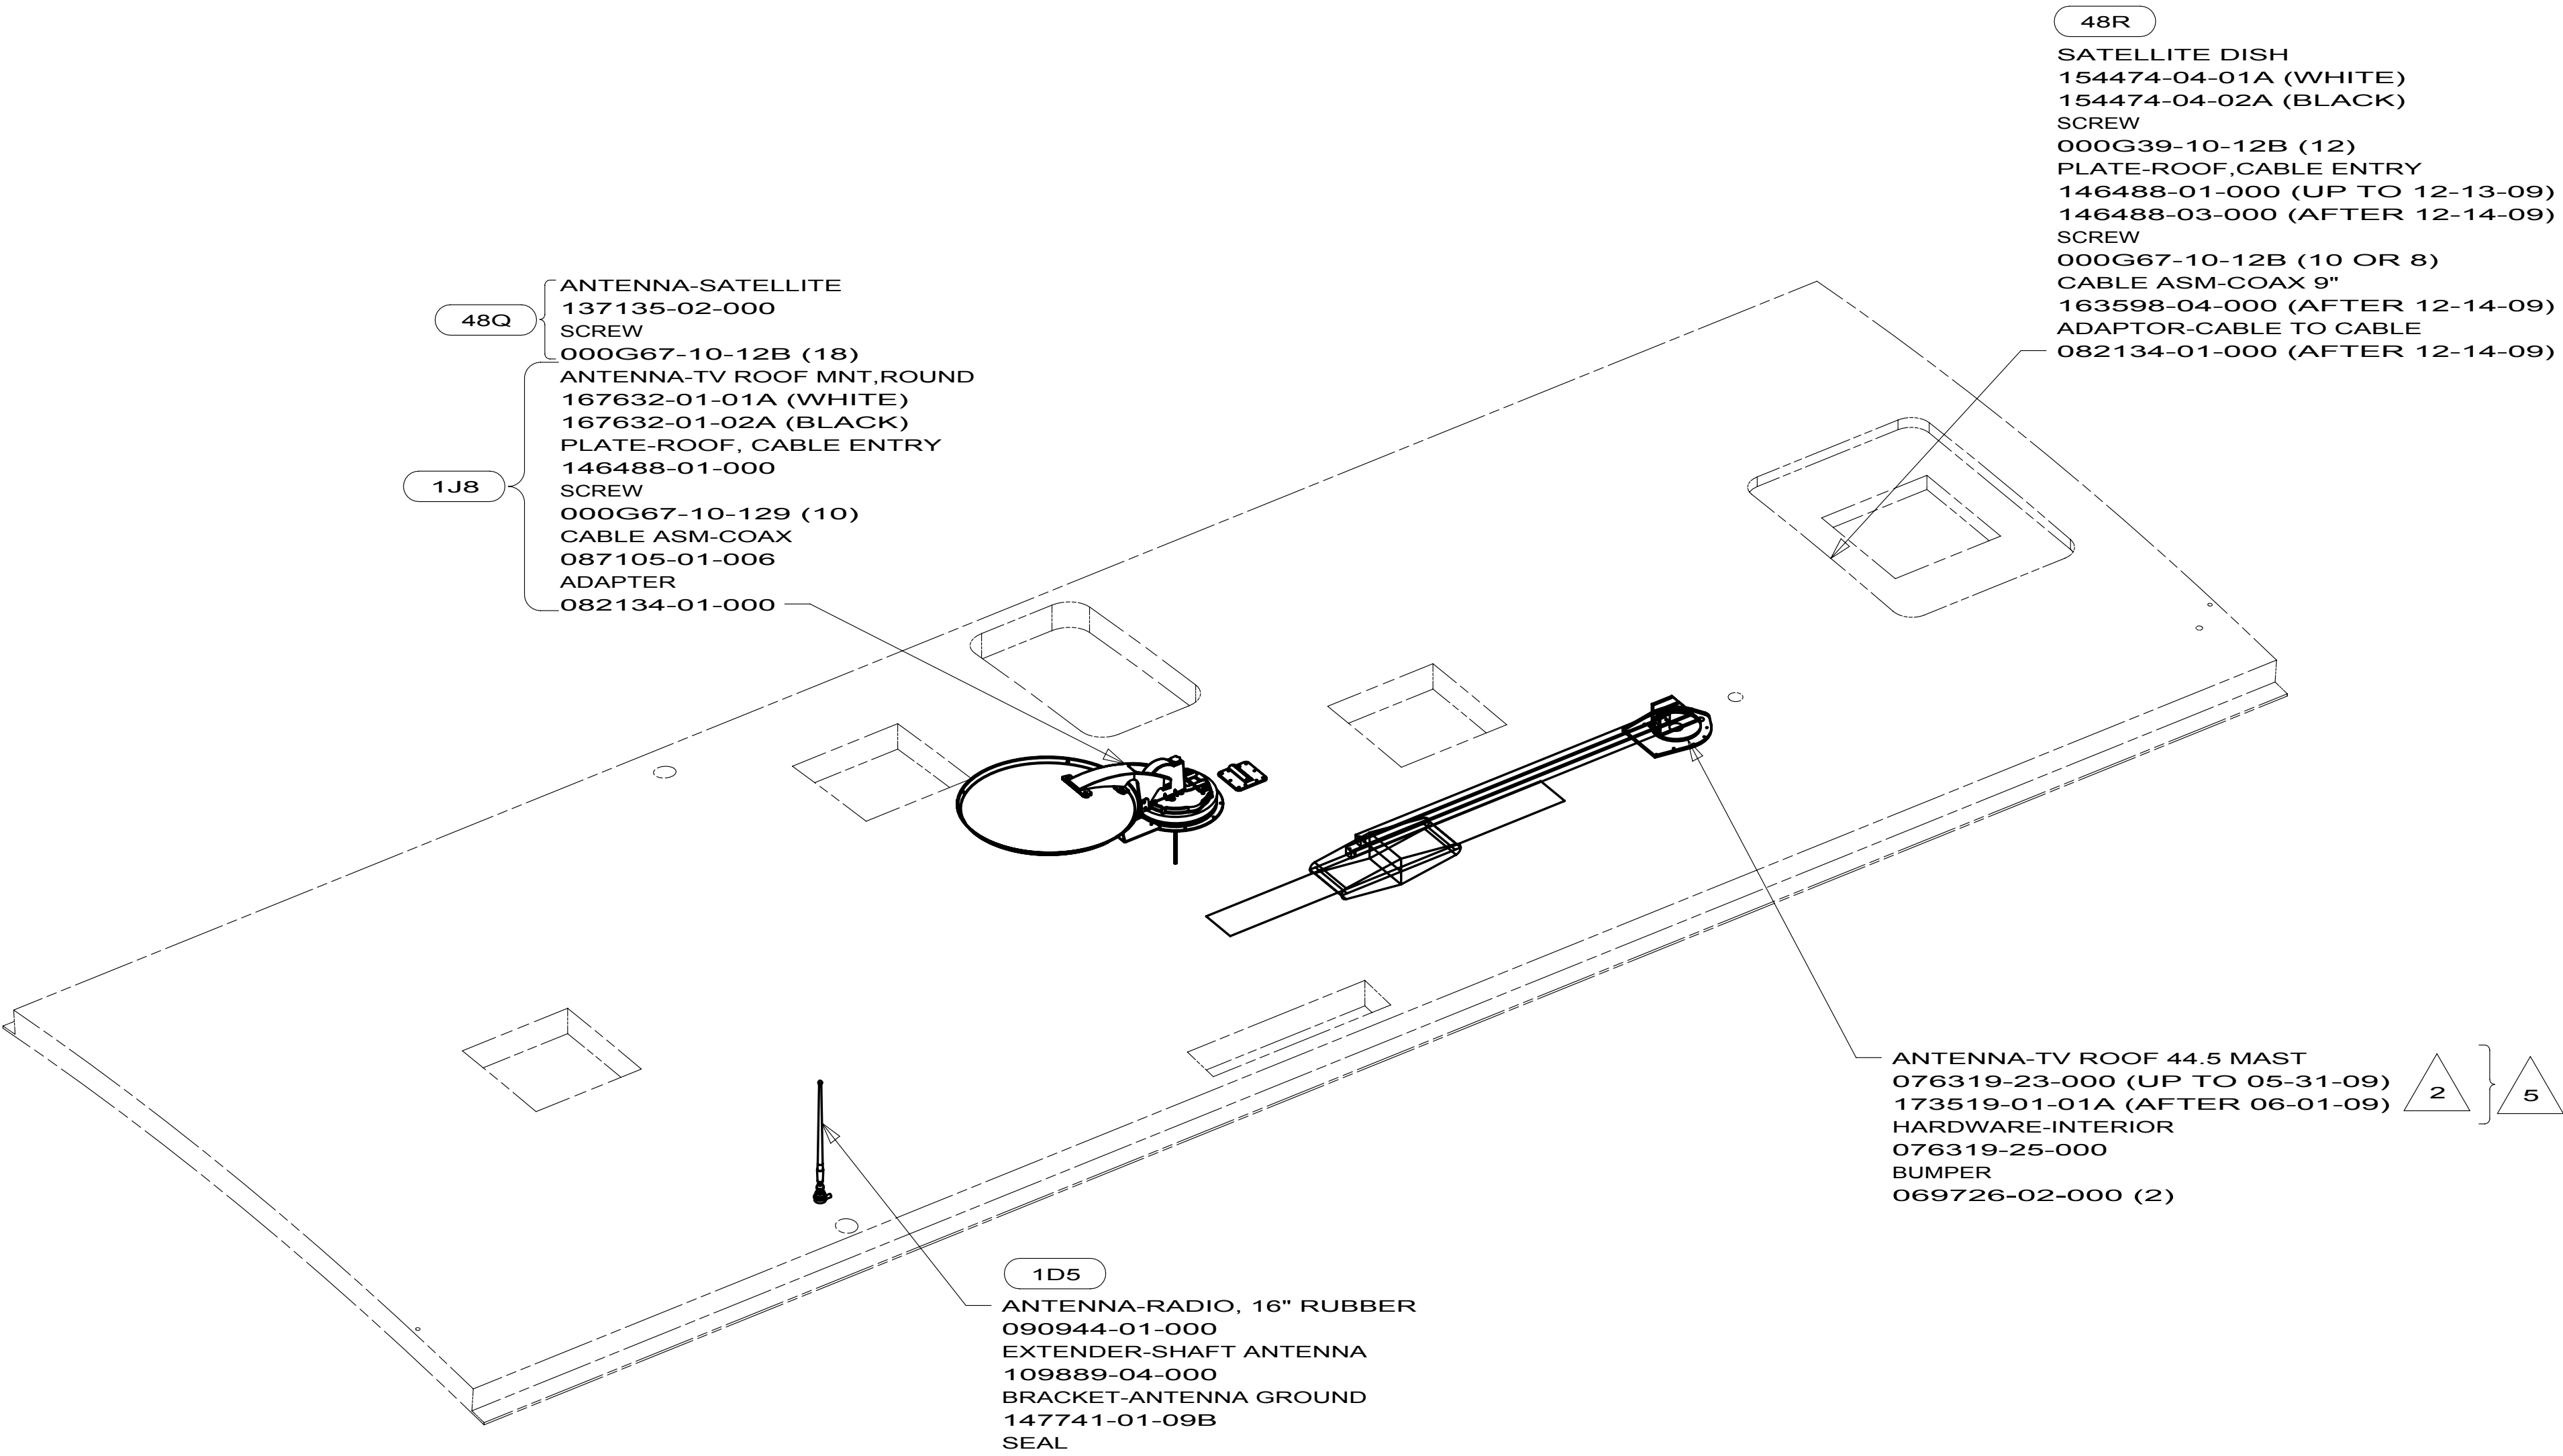

5 NOT USED WITH 1J8

2 SEE DRAWING 076319-01-000 FOR INSTALLATION OF TV ANTENNA.

NOTES:

X-X


FOR ELECTRICAL CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL TORQUE SPECIFICATIONS
SEE DWG NO.
128783-01-000

- 48R SAT TV SYSTEM IN-MOTION
- 48Q SATELLITE DISH & ELEV.SENSOR
- 1J8 TV ANTENNA-OMNIDIRECTIONAL
- 1D5 ENTERTAINMENT CENTR/EXT W/CD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

10 728B

WIRING INSTL-BODY,12V

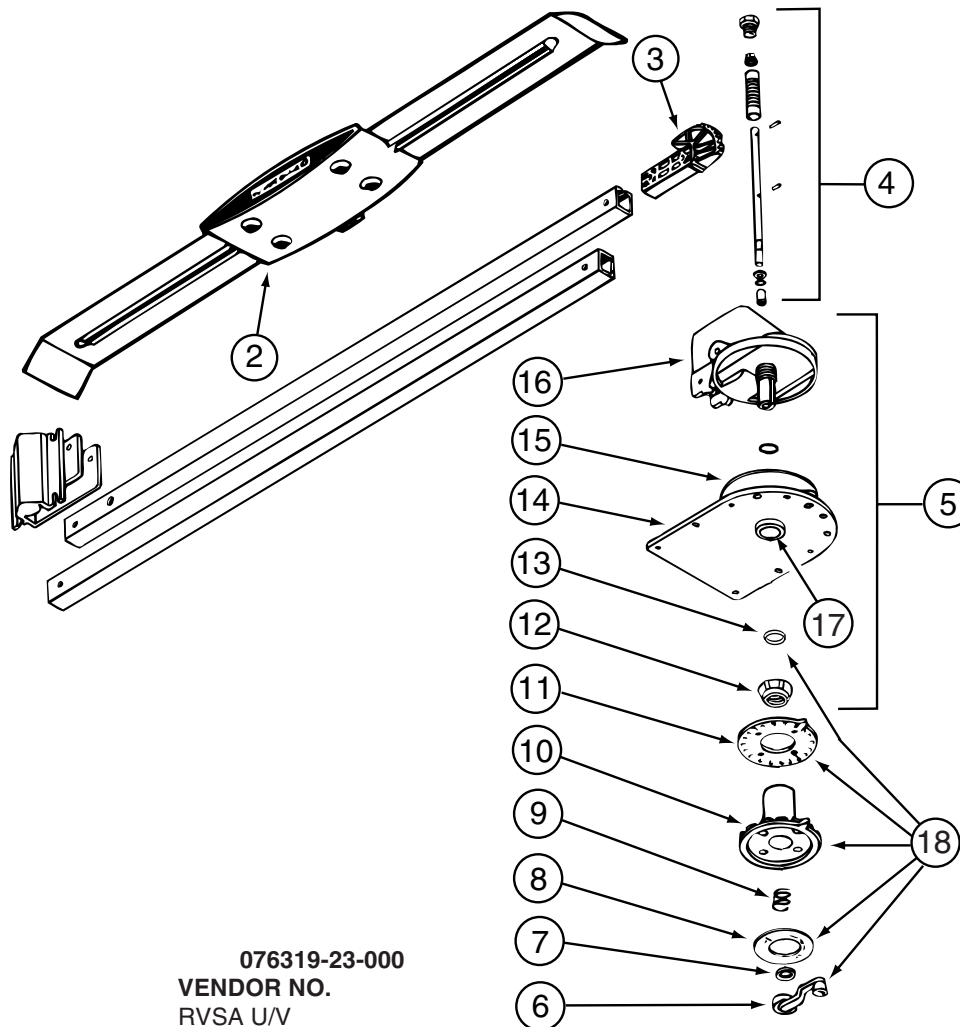


KEY PART NUMBER

2	076319-01-700	EA	HEAD-ANTENNA, AMPLIFIED
3	076319-01-701	EA	GEAR-ELEVATING, PLASTIC
4	076319-01-702	EA	SHAFT ASM-ELEVATING
5	076319-01-711	EA	BASE & LIFT ASM
7	076319-01-705	EA	GROMMET-NYLON, 7/8"ID
8	076319-01-708	EA	DECAL-CRANK
9	076319-01-707	EA	SPRING-HANDLE
11	076319-01-712	EA	PLATE - CEILING
12	076319-01-715	EA	NUT (GEAR HOUSING)
14	076319-01-713	EA	PLATE-BASE, STEEL
15	076319-01-703	EA	BEARING-NYLON, 5"OD
16	076319-01-714	EA	HOUSING, ROTATING GEAR
17	076319-01-704	EA	BEARING-NYLON, 1.25"OD
18	076319-01-709	EA	HANDLE-HEAD DIRECTIONAL
	076319-01-716	EA	TUBING, ELEVATING

076319-23-000
VENDOR NO.

RVSA U/V
2200046
RP-4000
2762802
3200658
5413002
2160822
3200608
2200047
3100523
3200656
2200049
3200657
200644
RP-2900

CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)

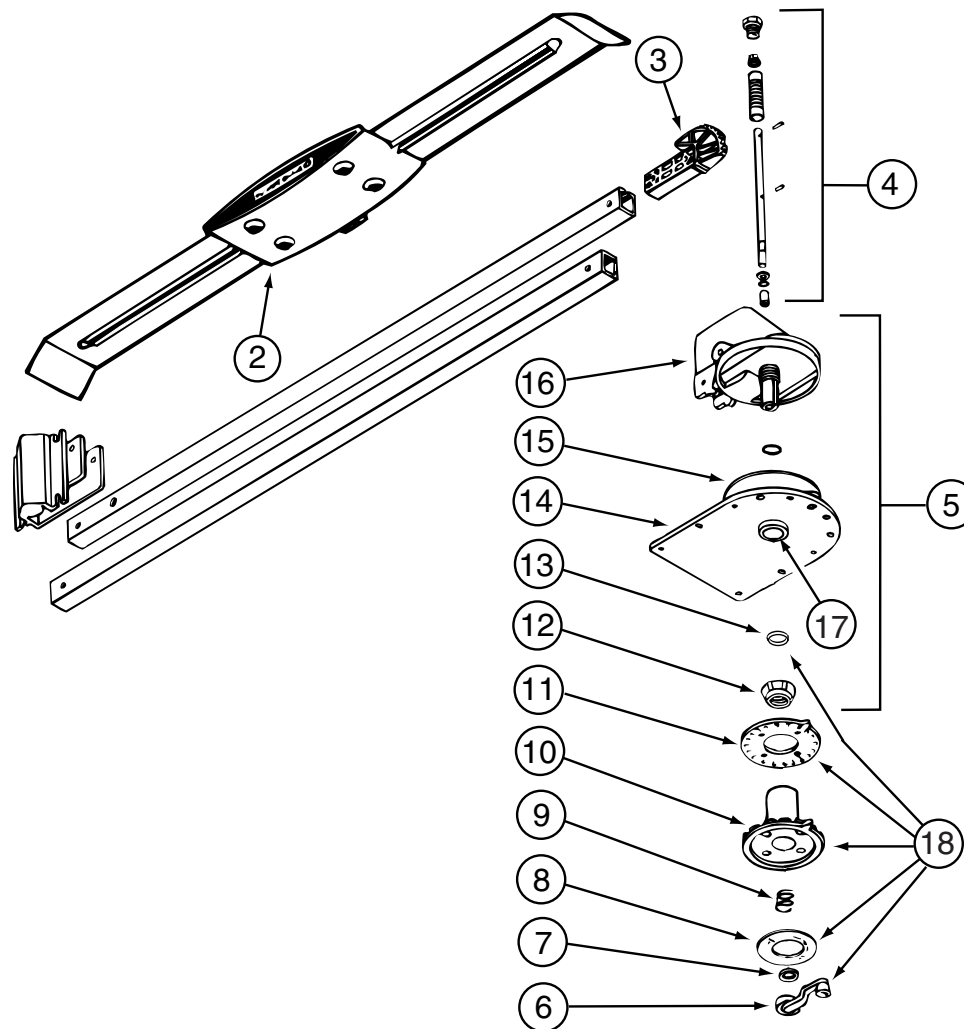


076319-25-000

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
6	076319-01-706	EA	CRANK-W/SET SCREW UNIV/BEIGE	2750897
6	120233-01-710	EA	HANDLE-CRANK W/SCREW - WHITE	RP-6795
8	076319-01-708	EA	DECAL-CRANK	5413002
10	076319-25-700	EA	DIRECTIONAL HANDLE(WHITE)	3200612
11	076319-25-701	EA	PLATE - CEILING(WHITE)	3200609
13	120233-01-709	EA	WASHER-NYLON	RP-2658
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

KEY	PART NUMBER	U/M	DESCRIPTION
	087694-01-700	EA	BULB

087694-01-000
VENDOR NO.
GE561

KEY	PART NUMBER	U/M DESCRIPTION	121935-01-01A VENDOR NO.
	121935-01-700	EA LENS ONLY - W/CENTER HOLE	809511

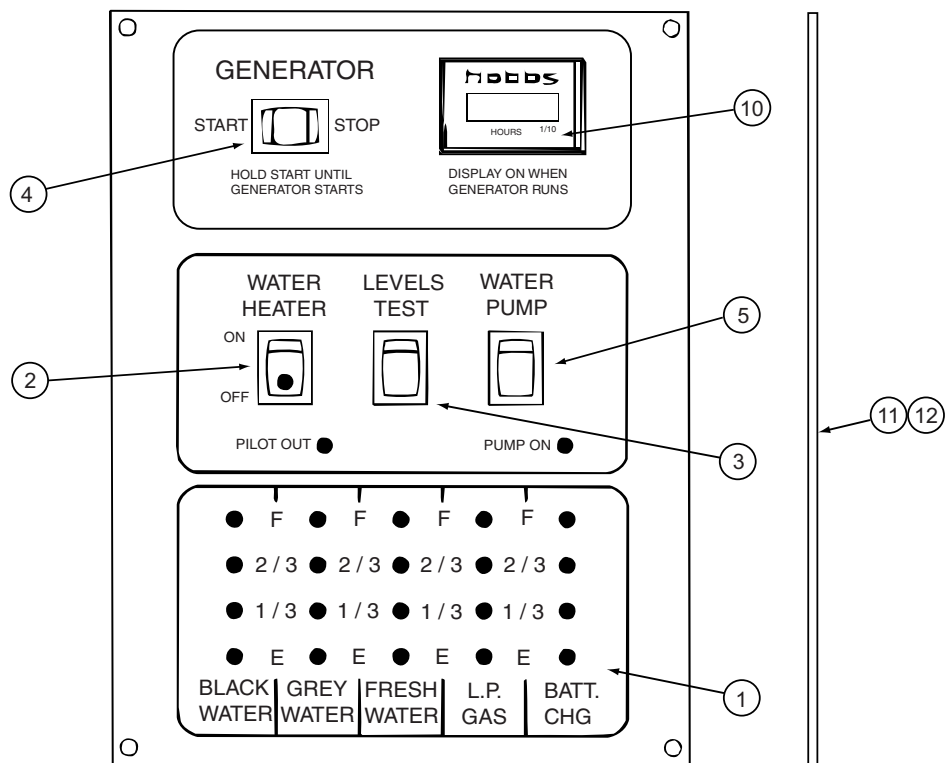

134940-06-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-702	EA	SWITCH - MOM/OFF/MOM/3 TERM	L0112-00
5	096983-01-703	EA	SWITCH - ON/ON	L0115-00
10	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)	L0775-00
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

134940-07-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-703	EA	SWITCH - ON/ON	L0115-00
5	134940-02-700	EA	SWITCH - DUMMY	L0118
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

137135-05-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	120233-01-714	EA CLIP-E	5160818
	120233-01-737	EA PLATE/INT-W/DIRECTIONAL HDLE	RK-CEIL
	120233-01-738	EA HDW PKG-HANDLE/SPRING/WASHER	RK-HAND
	120233-04-703	EA KIT-DIRECTIONAL HDL UPGRADE	RP-RM46
	137135-01-703	EA KIT ELEV-SHAFT/PLUG/SPRING	RP-4400
	137135-01-704	EA PIN - 1/4" X 3.25"	2160813
	137135-01-708	EA TURRET	3100728
	137135-01-710	EA PLATE - ROTATE LIMIT	3720052
	137135-01-712	EA BEARING - OUTER	2590347
	137135-01-713	EA TURRET BASE	3100730
	137135-01-714	EA GEAR - ELEVATING SHAFT	2200465
	137135-01-715	EA BEARING - INNER	2590348
	137135-01-717	EA BOLT - FLAT HEAD	2160362
	137135-01-719	EA BRACKET - PIVOT	2744945
	137135-01-722	EA CLAMP	2590343

KEY	PART NUMBER	U/M DESCRIPTION
	137417-01-700	EA LENS - SINGLE (FROSTED)


137417-01-01A, 137417-03-01A
VENDOR NO.
810868

KEY	PART NUMBER	U/M DESCRIPTION
	137417-02-700	EA LENS - SINGLE OPTIC

137417-02-01A
VENDOR NO.
810844

KEY	PART NUMBER	U/M DESCRIPTION
	137417-05-700	EA LENS - DOUBLE OPTIC

137417-05-01A
VENDOR NO.
810845

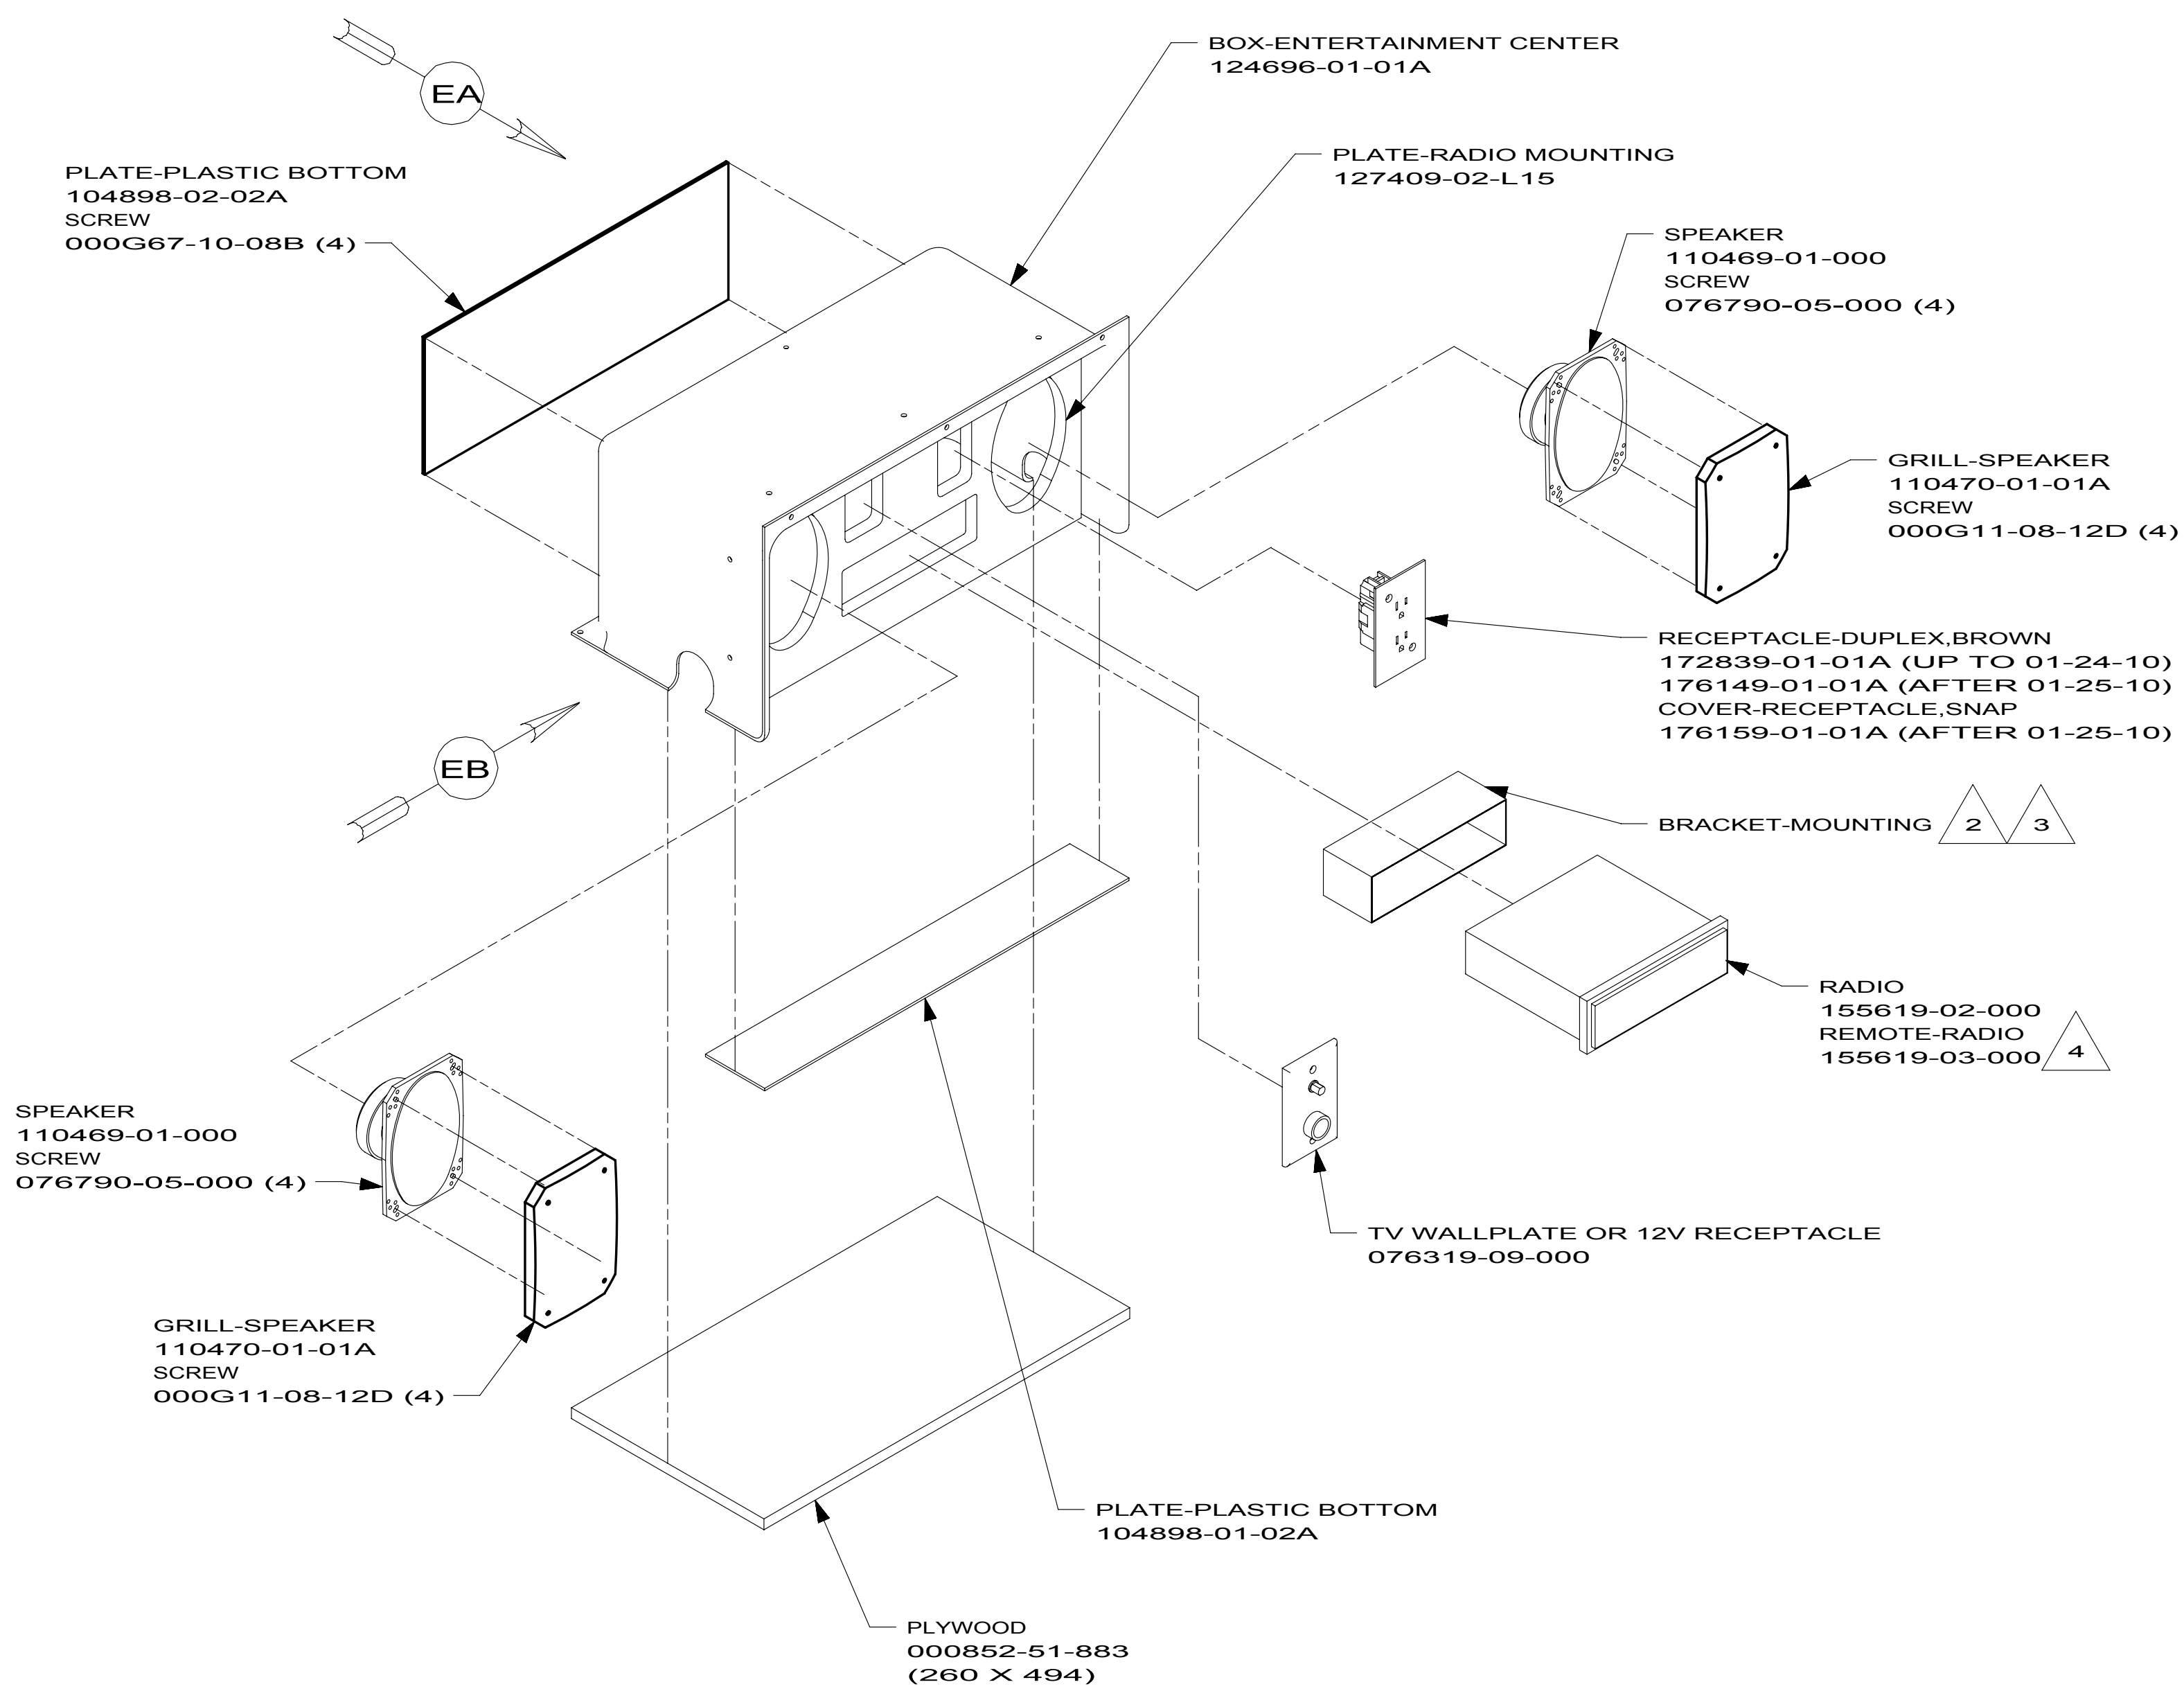

144818-02
331C
728B

- 4 PUT IN INFO CASE.
- 3 SUPPLIED WITH RADIO
- 2 BEND TABS ON MOUNTING BRACKET SUPPLIED WITH RADIO, TO HOLD IN PLACE.
1. SEE WIRING INSTL-BODY FOR ADDITIONAL INFORMATION.

NOTES:

1D5 ENTERTAINMENT CENTER/EXT W/CD

04 MOTORHOMES


ENTERTAINMENT CENTER COMPL

1


144818

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

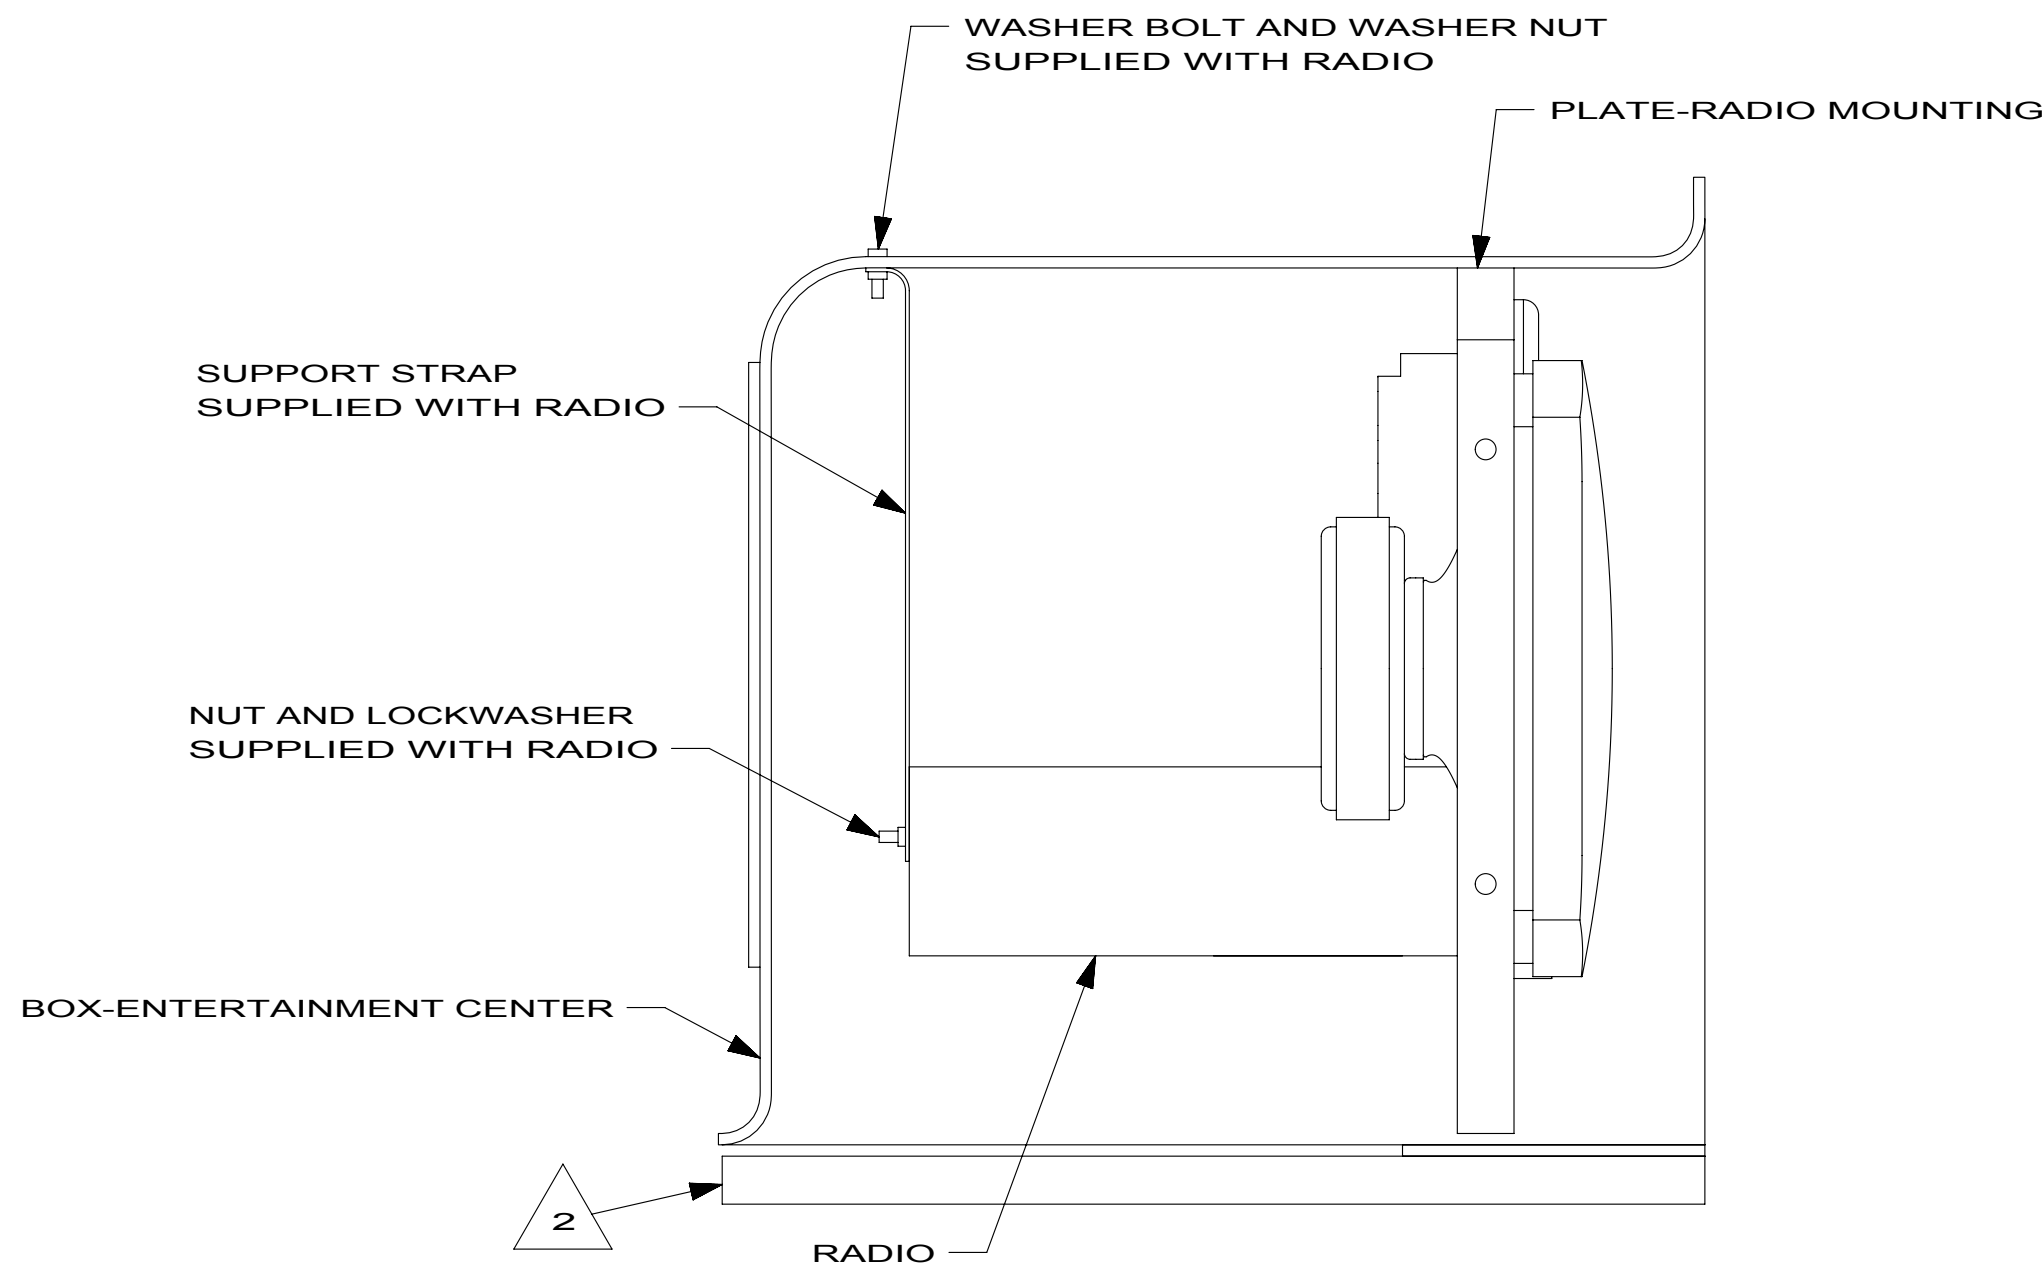


DETAIL EB

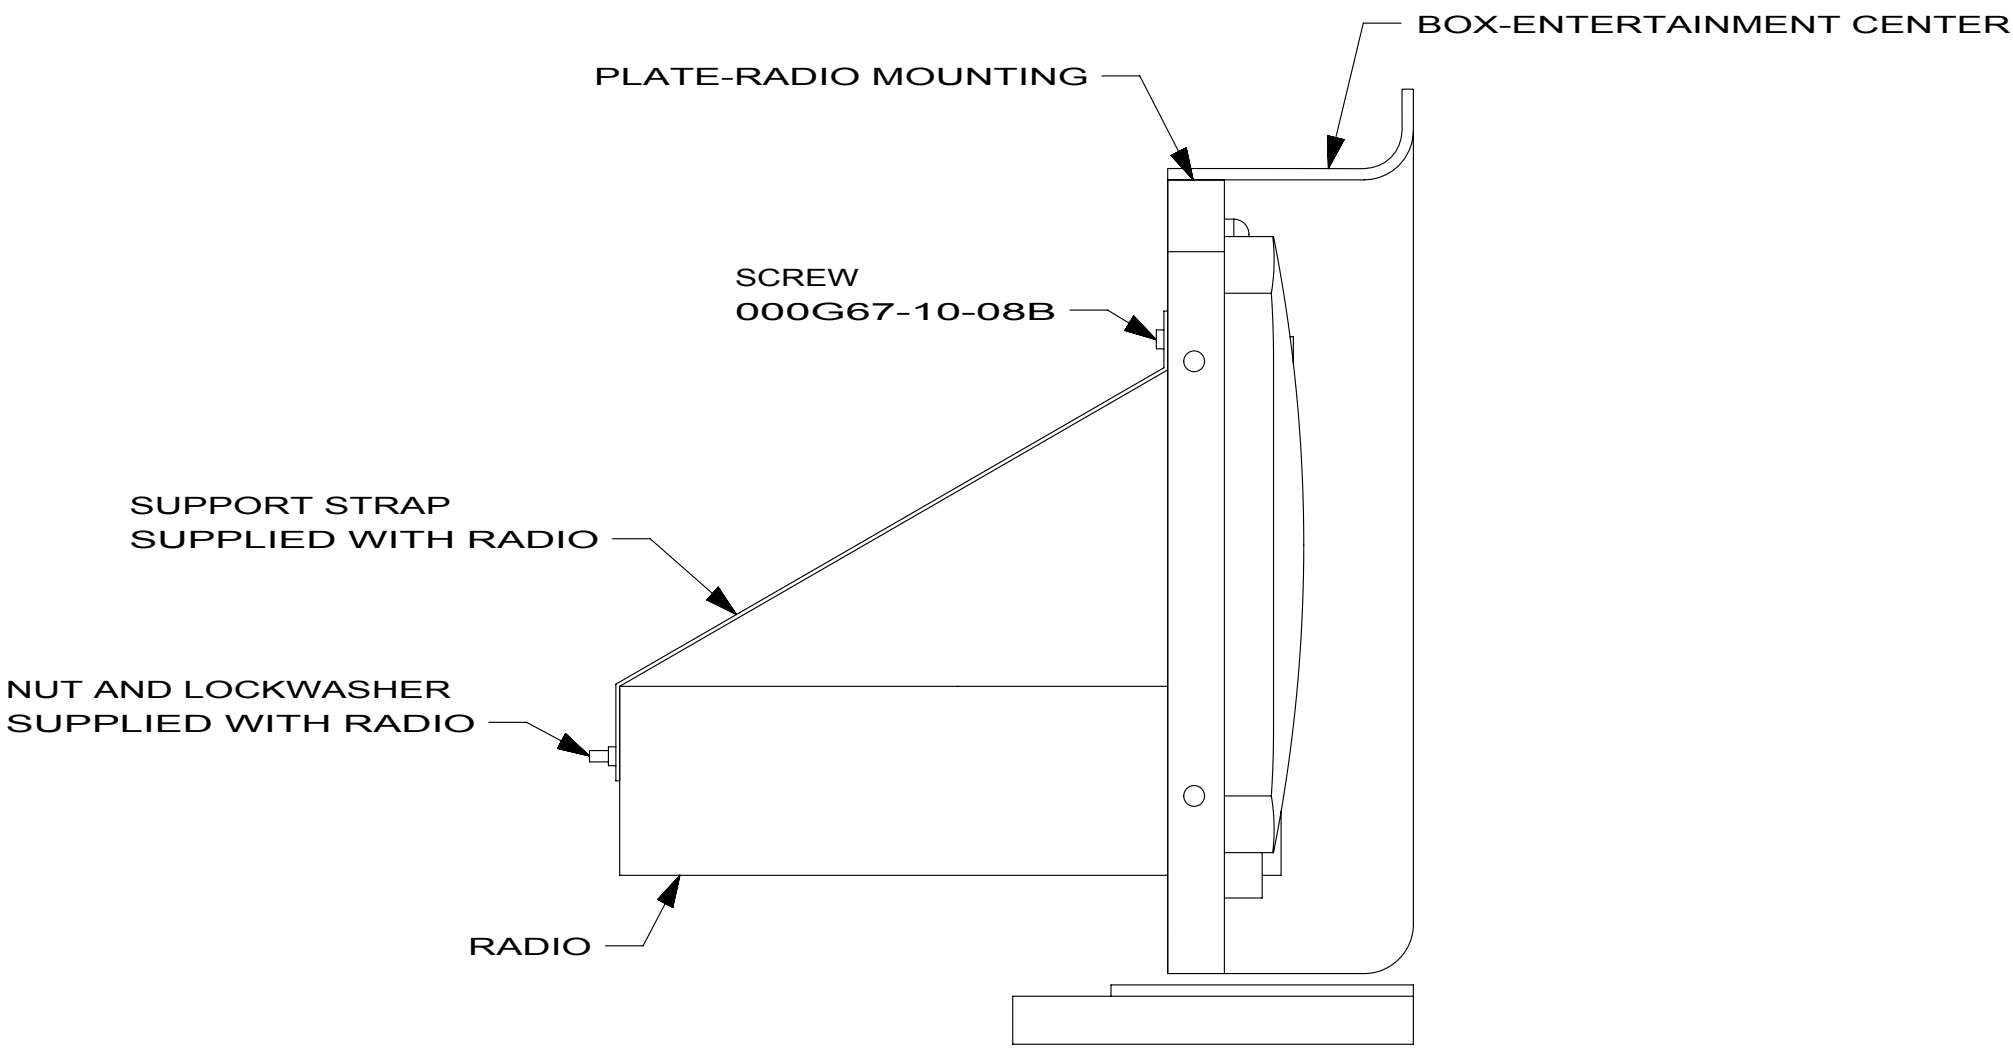

DETAIL ED

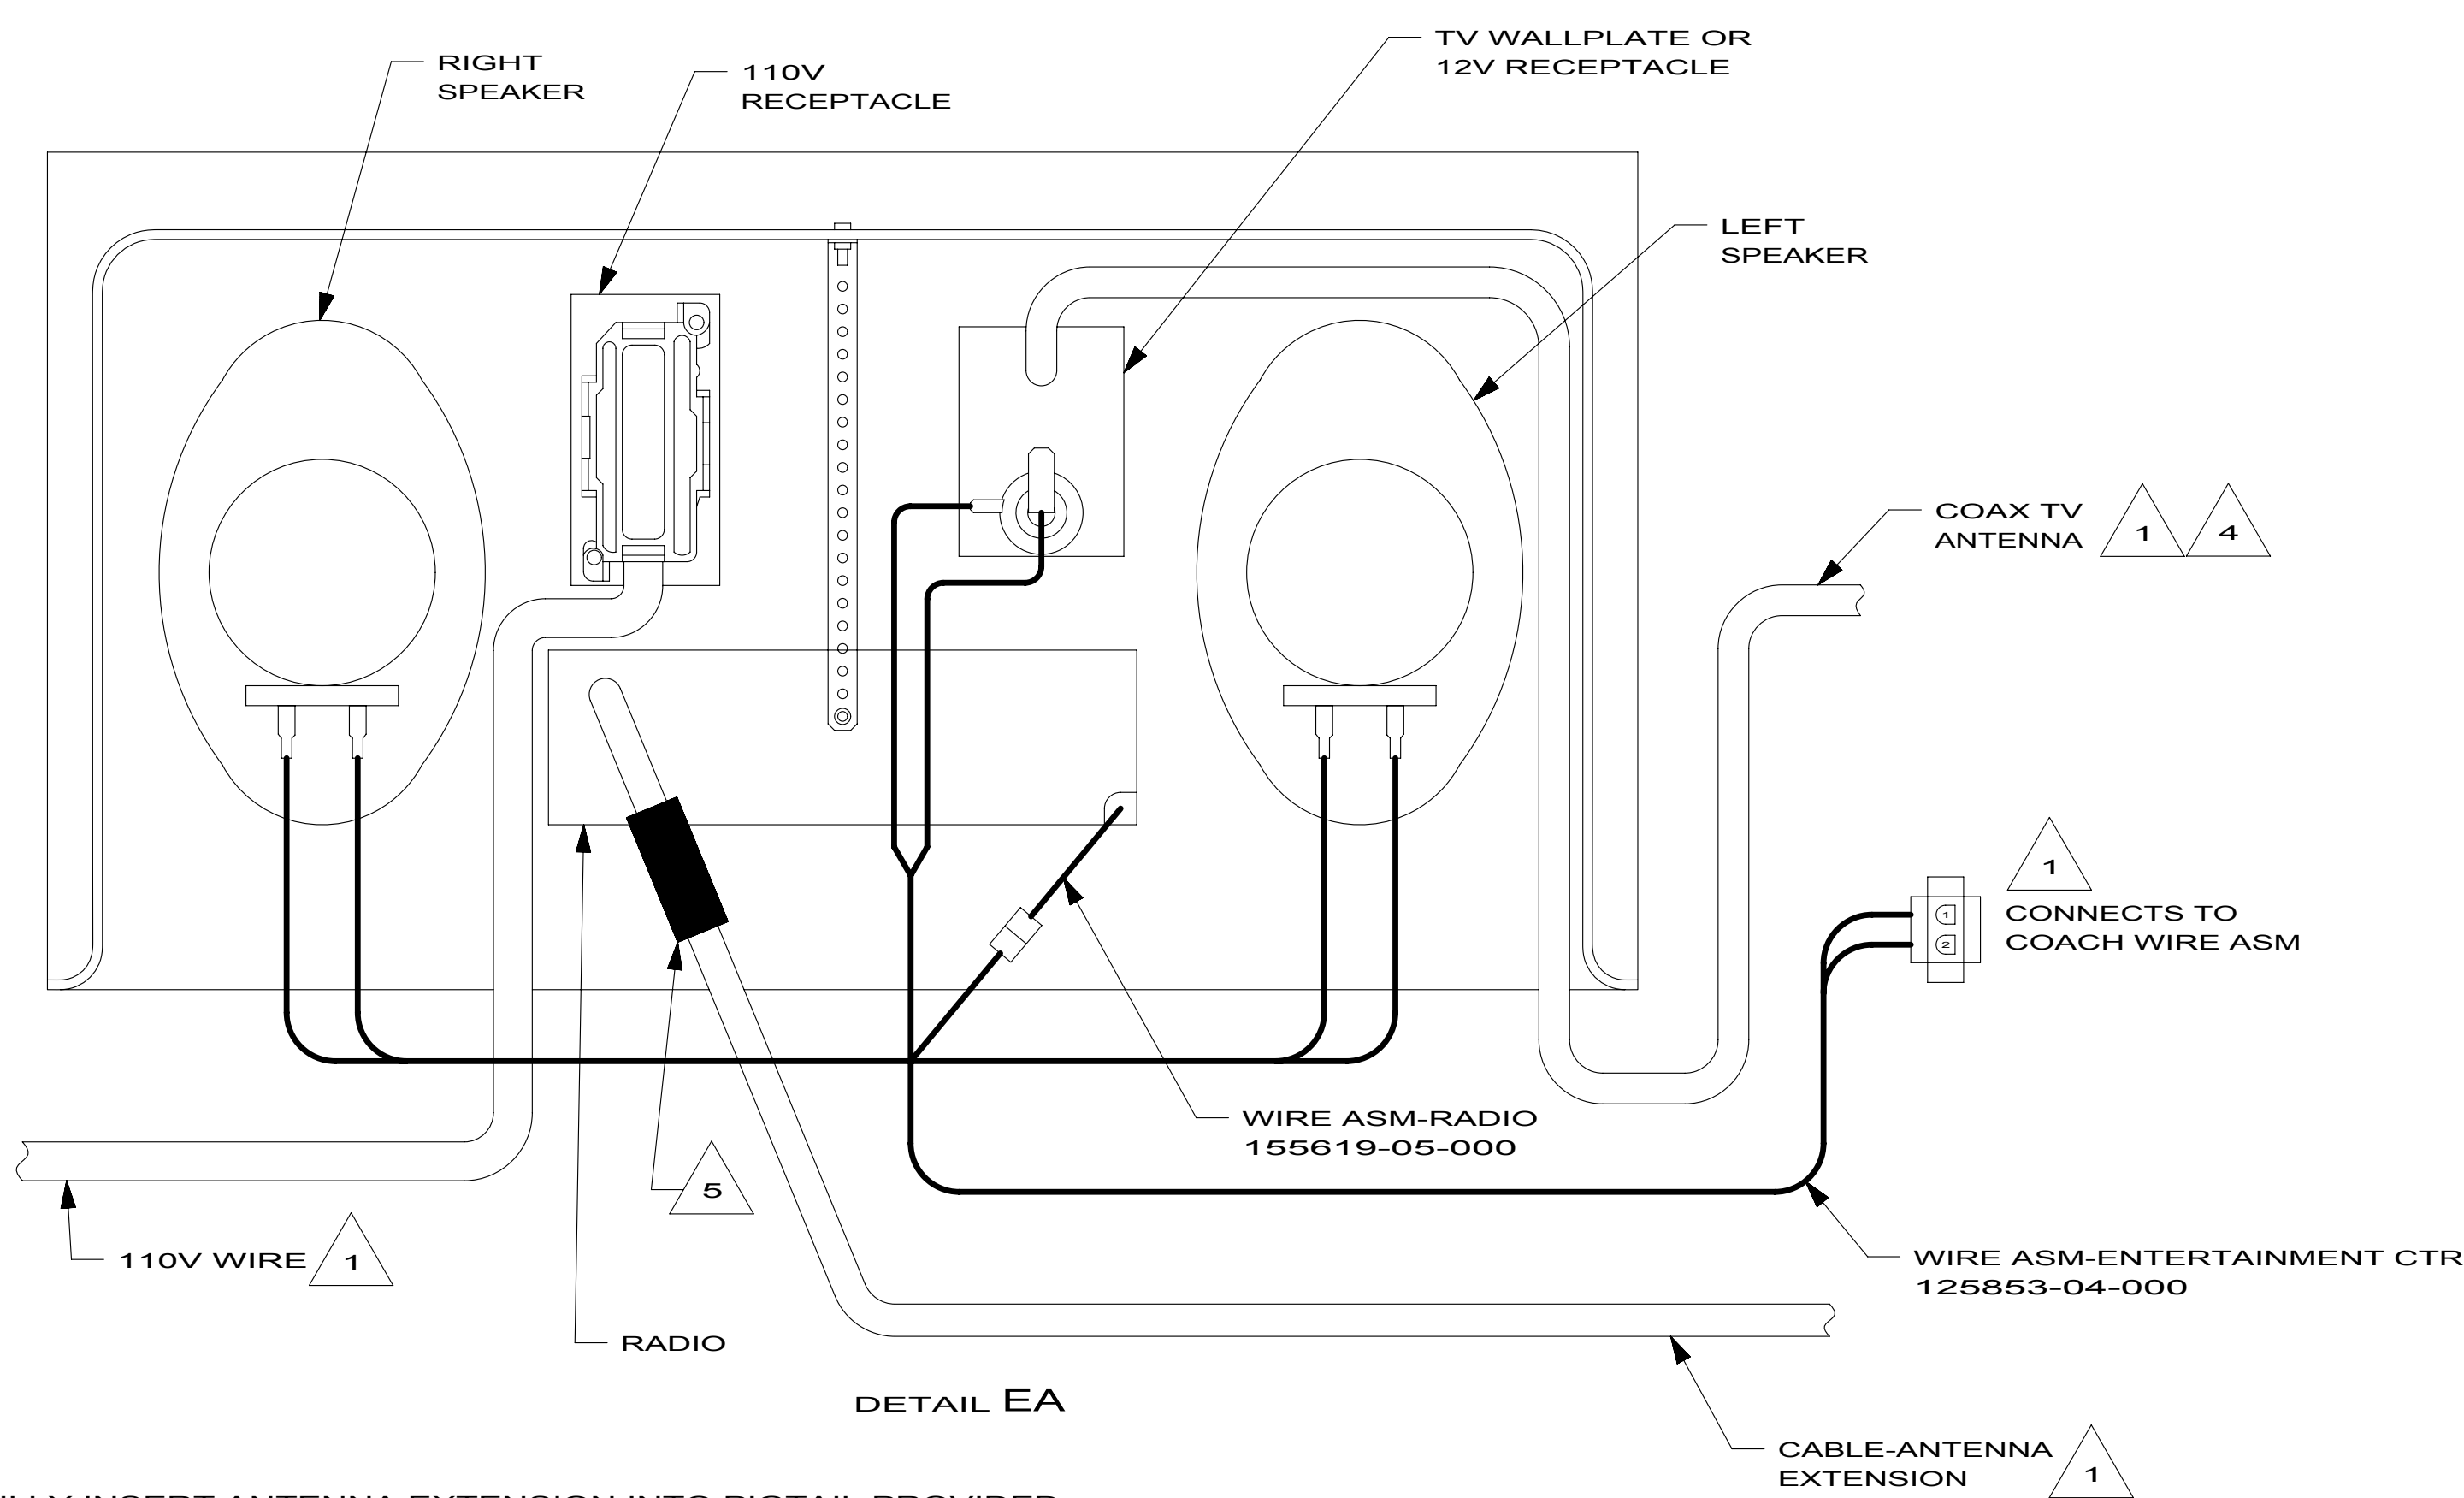

DETAIL EA

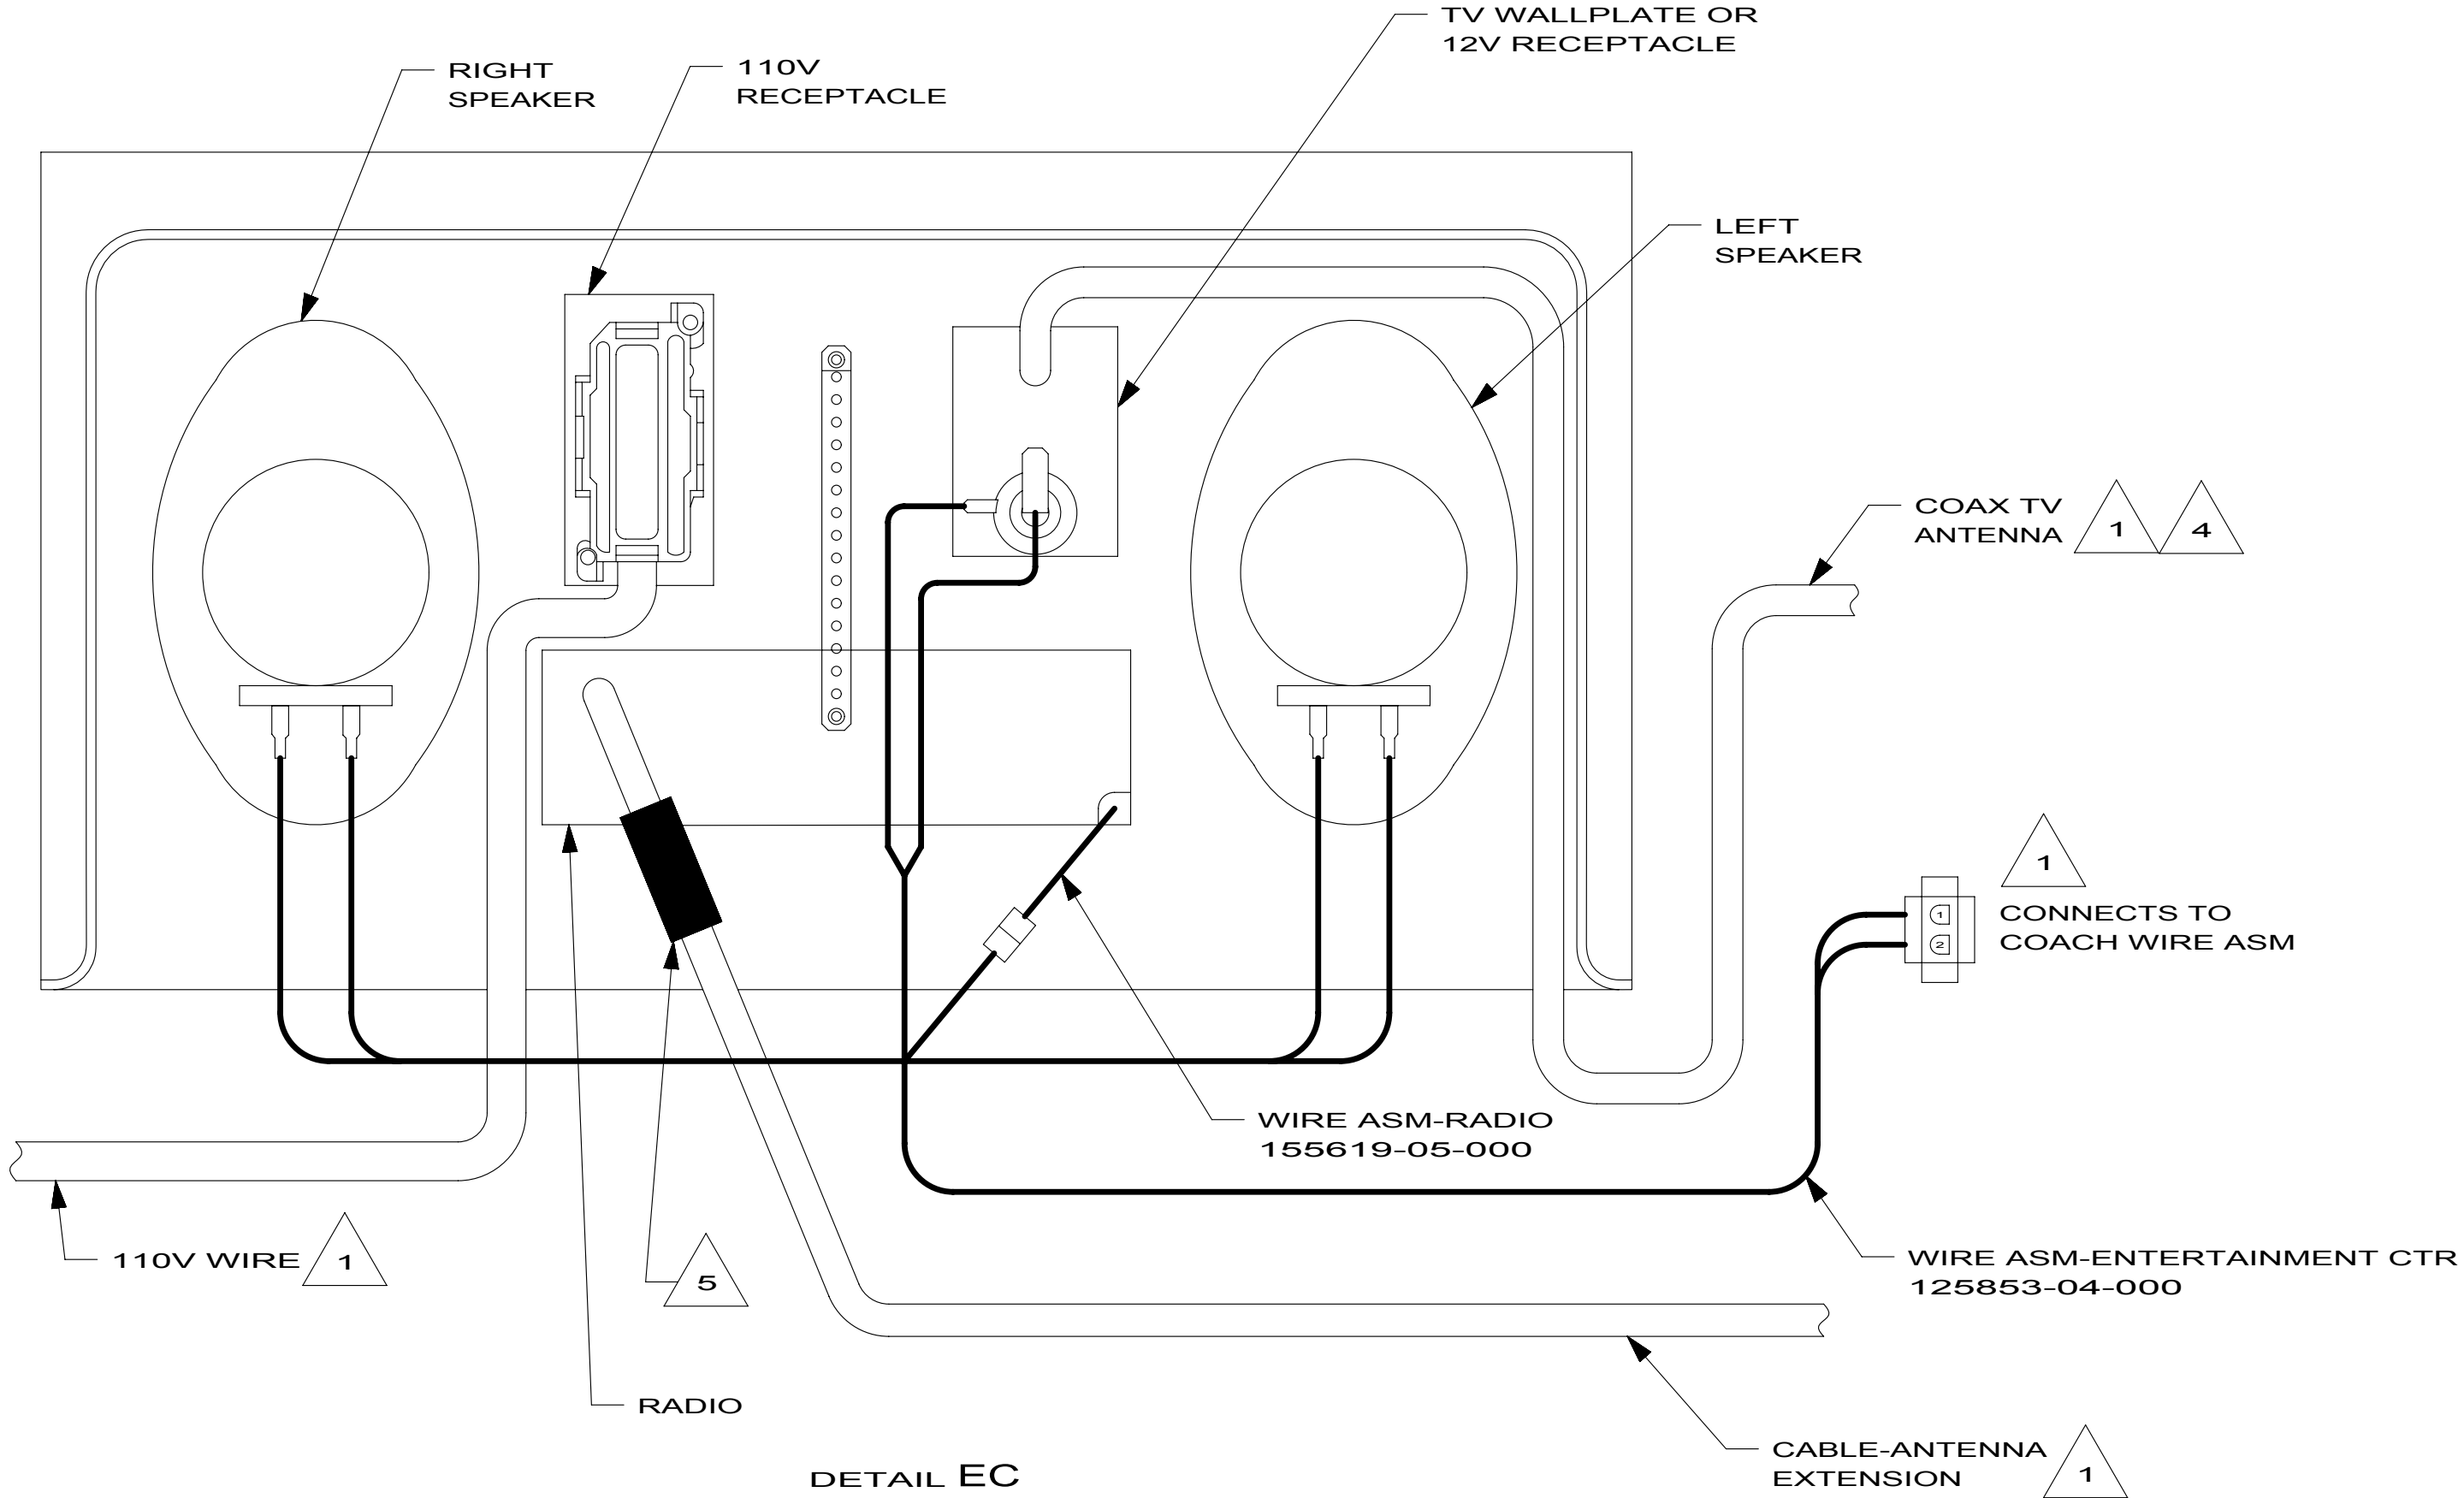

DETAIL EC

- 5 FULLY INSERT ANTENNA EXTENSION INTO PIGTAIL PROVIDED ON RADIO & WRAP WITH TAPE 008363-01-000 (100mm).
- 4 COAX ON TABS -02, & -03 ONLY.
- 2 PLYWOOD ON TAB -02 ONLY.
- 1 SEE WIRING INSTL-BODY FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

04 MOTORHOMES

ENTERTAINMENT CENTER COMPL

154474-04-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	154474-04-703	EA BOARD RF ASSEMBLY N/C	100087
	154474-04-705	EA CABLE OUT DUAL TOP PCBA N/C	20034-1
	154474-04-706	EA LNB DUAL EAGLE ASPEN N/C	1863-1

154474-04-02A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	154474-04-702	EA DOME ONLY-REPLACEMENT-BLACK	1850-B-LP-FS
	154474-04-703	EA BOARD RF ASSEMBLY N/C	100087
	154474-04-705	EA CABLE OUT DUAL TOP PCBA N/C	20034-1
	154474-04-706	EA LNB DUAL EAGLE ASPEN N/C	1863-1

KEY	PART NUMBER	U/M	DESCRIPTION	163097-01-000	VENDOR NO.
	163097-01-700	EA	KEY - #2382 (ILLINOIS LOCK)		2382
	163097-01-701	EA	KEY - #2341 (MILLER DIAL)		PART SALES

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	123775-01-700	EA	BULB - 10 WATT - HALOGEN	71-JC10
	165170-01-700	EA	LENS	81230-LENS

165643-01-01A			
KEY	PART NUMBER	U/M	DESCRIPTION
	165643-01-700	EA	LENS
	165643-01-701	EA	BULB HALOGEN 20 WATT
			VENDOR NO.
			81232-LENS
			88002


KEY	PART NUMBER	U/M	DESCRIPTION
	170693-02-700	EA	LENS-OPTIC

170693-02-02A
VENDOR NO
L8106

KEY	PART NUMBER	U/M	DESCRIPTION
	170693-05-700	EA	LENS

170693-05-02A, 171693-07-02A
VENDOR NO
L8105

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	172120-01-700	EA	REMOTE - RADIO	REMJC

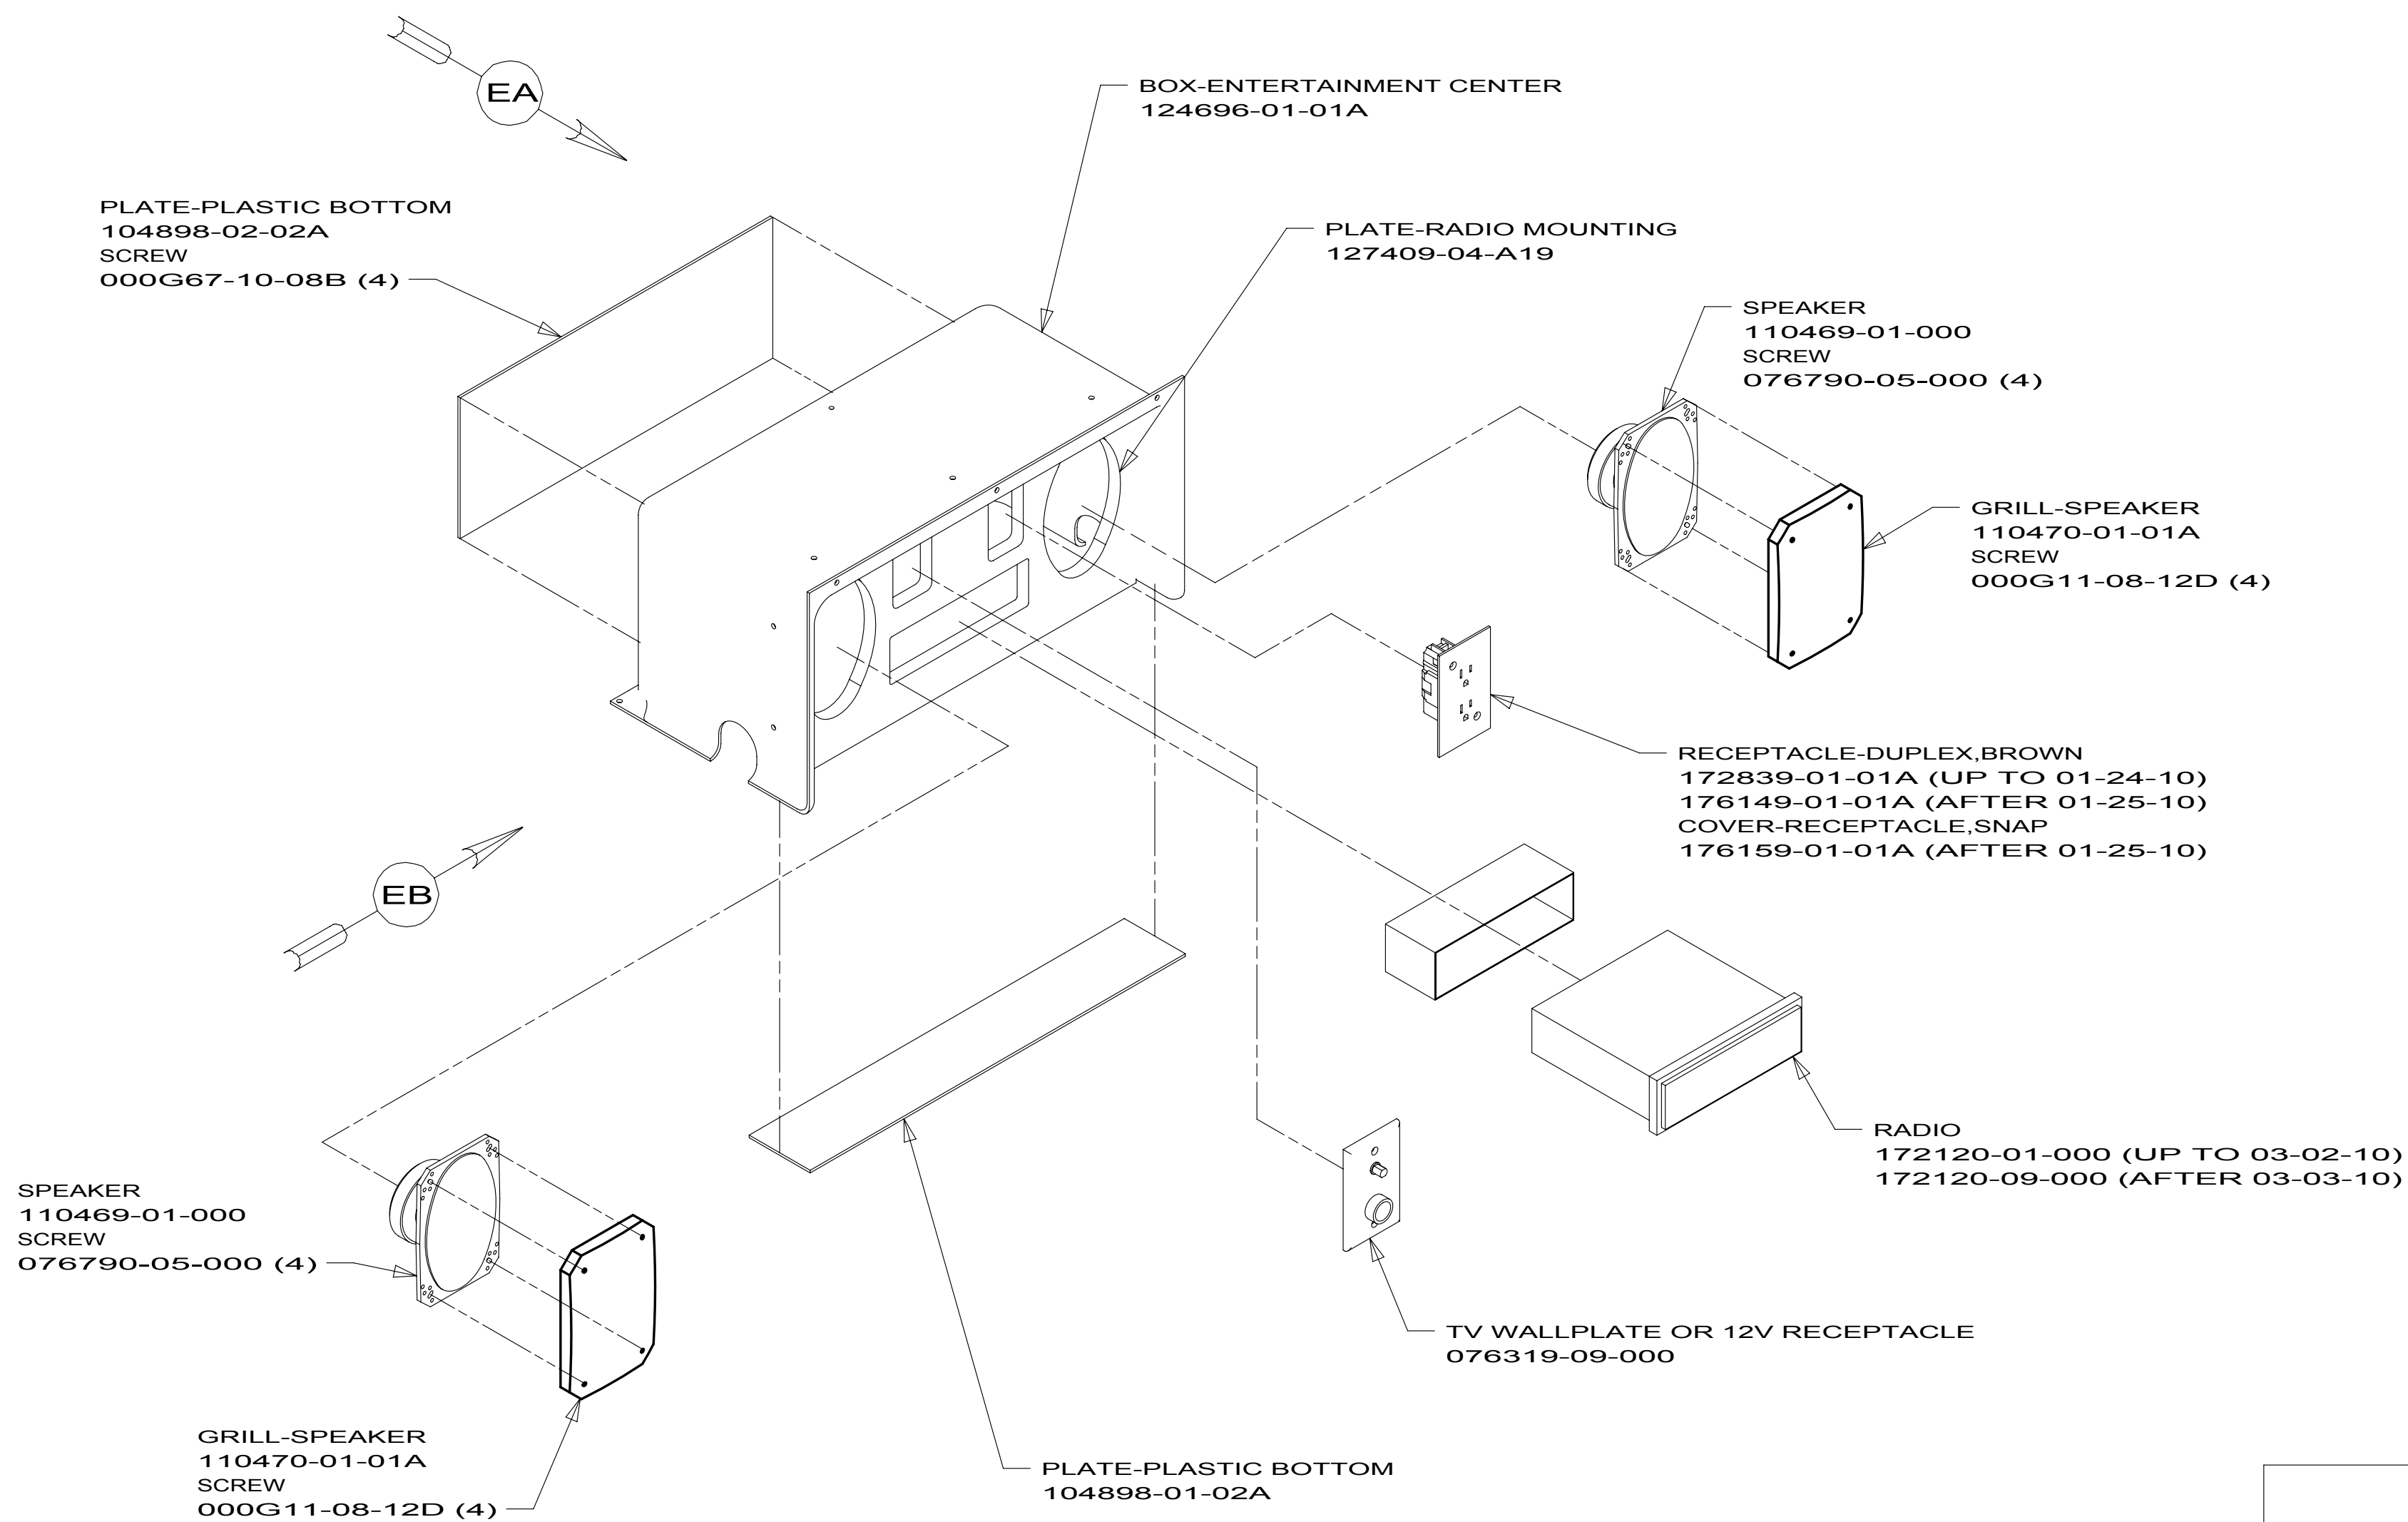

173464-01
331C
728B

1D5 ENTERTAINMENT CENTER/EXT W/CD

1. SEE WIRING INSTL-BODY FOR ADDITIONAL INFORMATION.



NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000



X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

ENTERTAINMENT CENTER COMPL

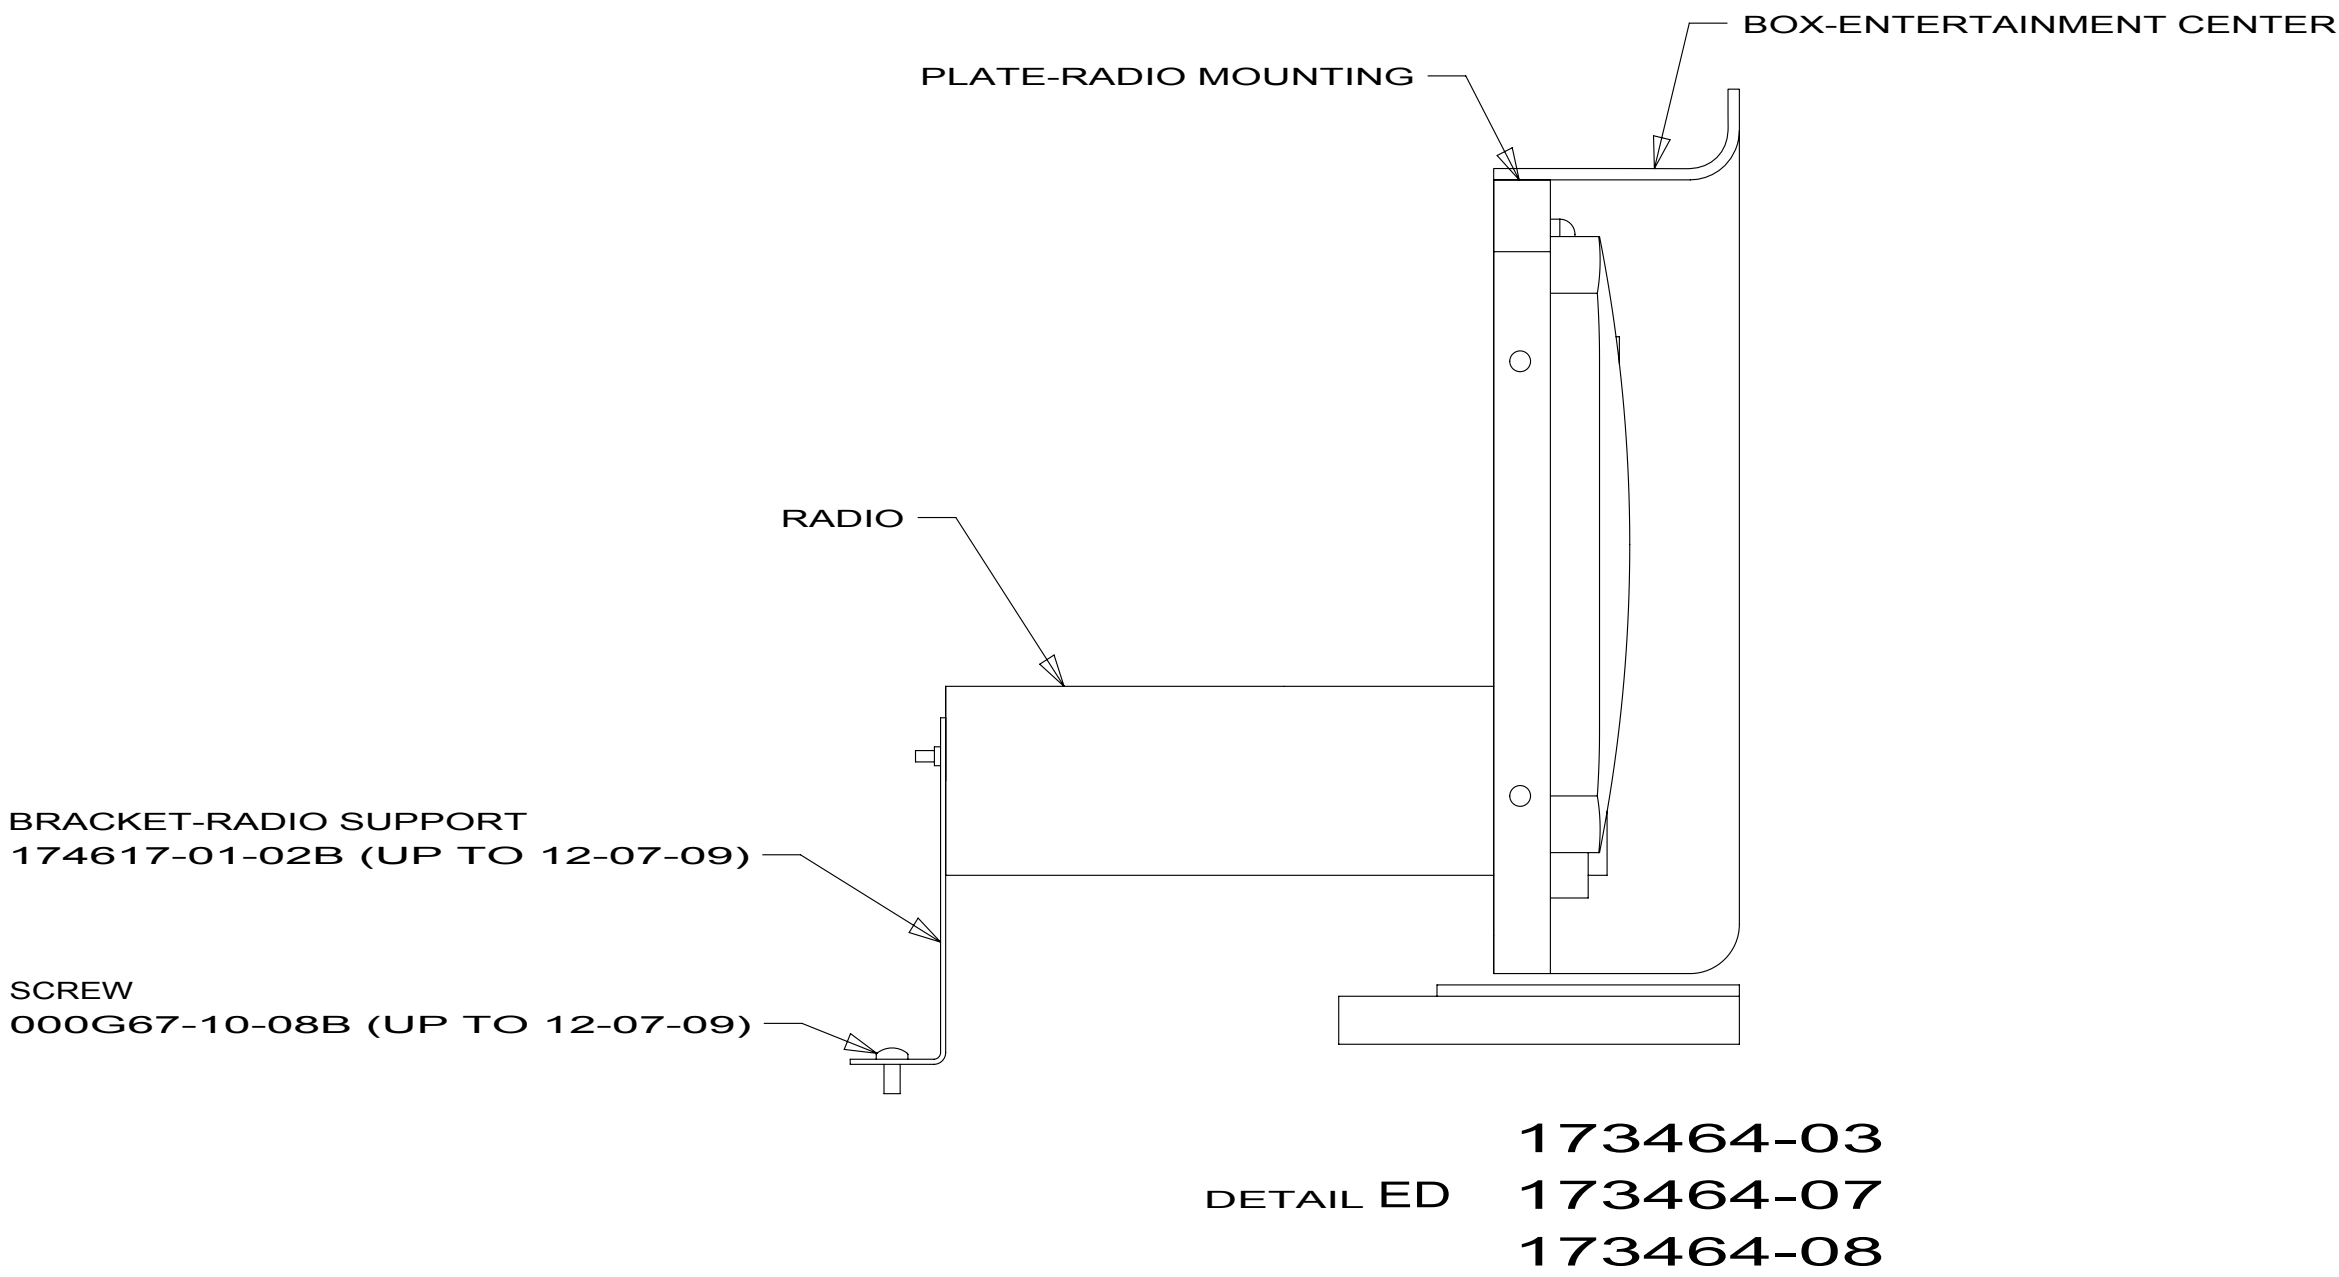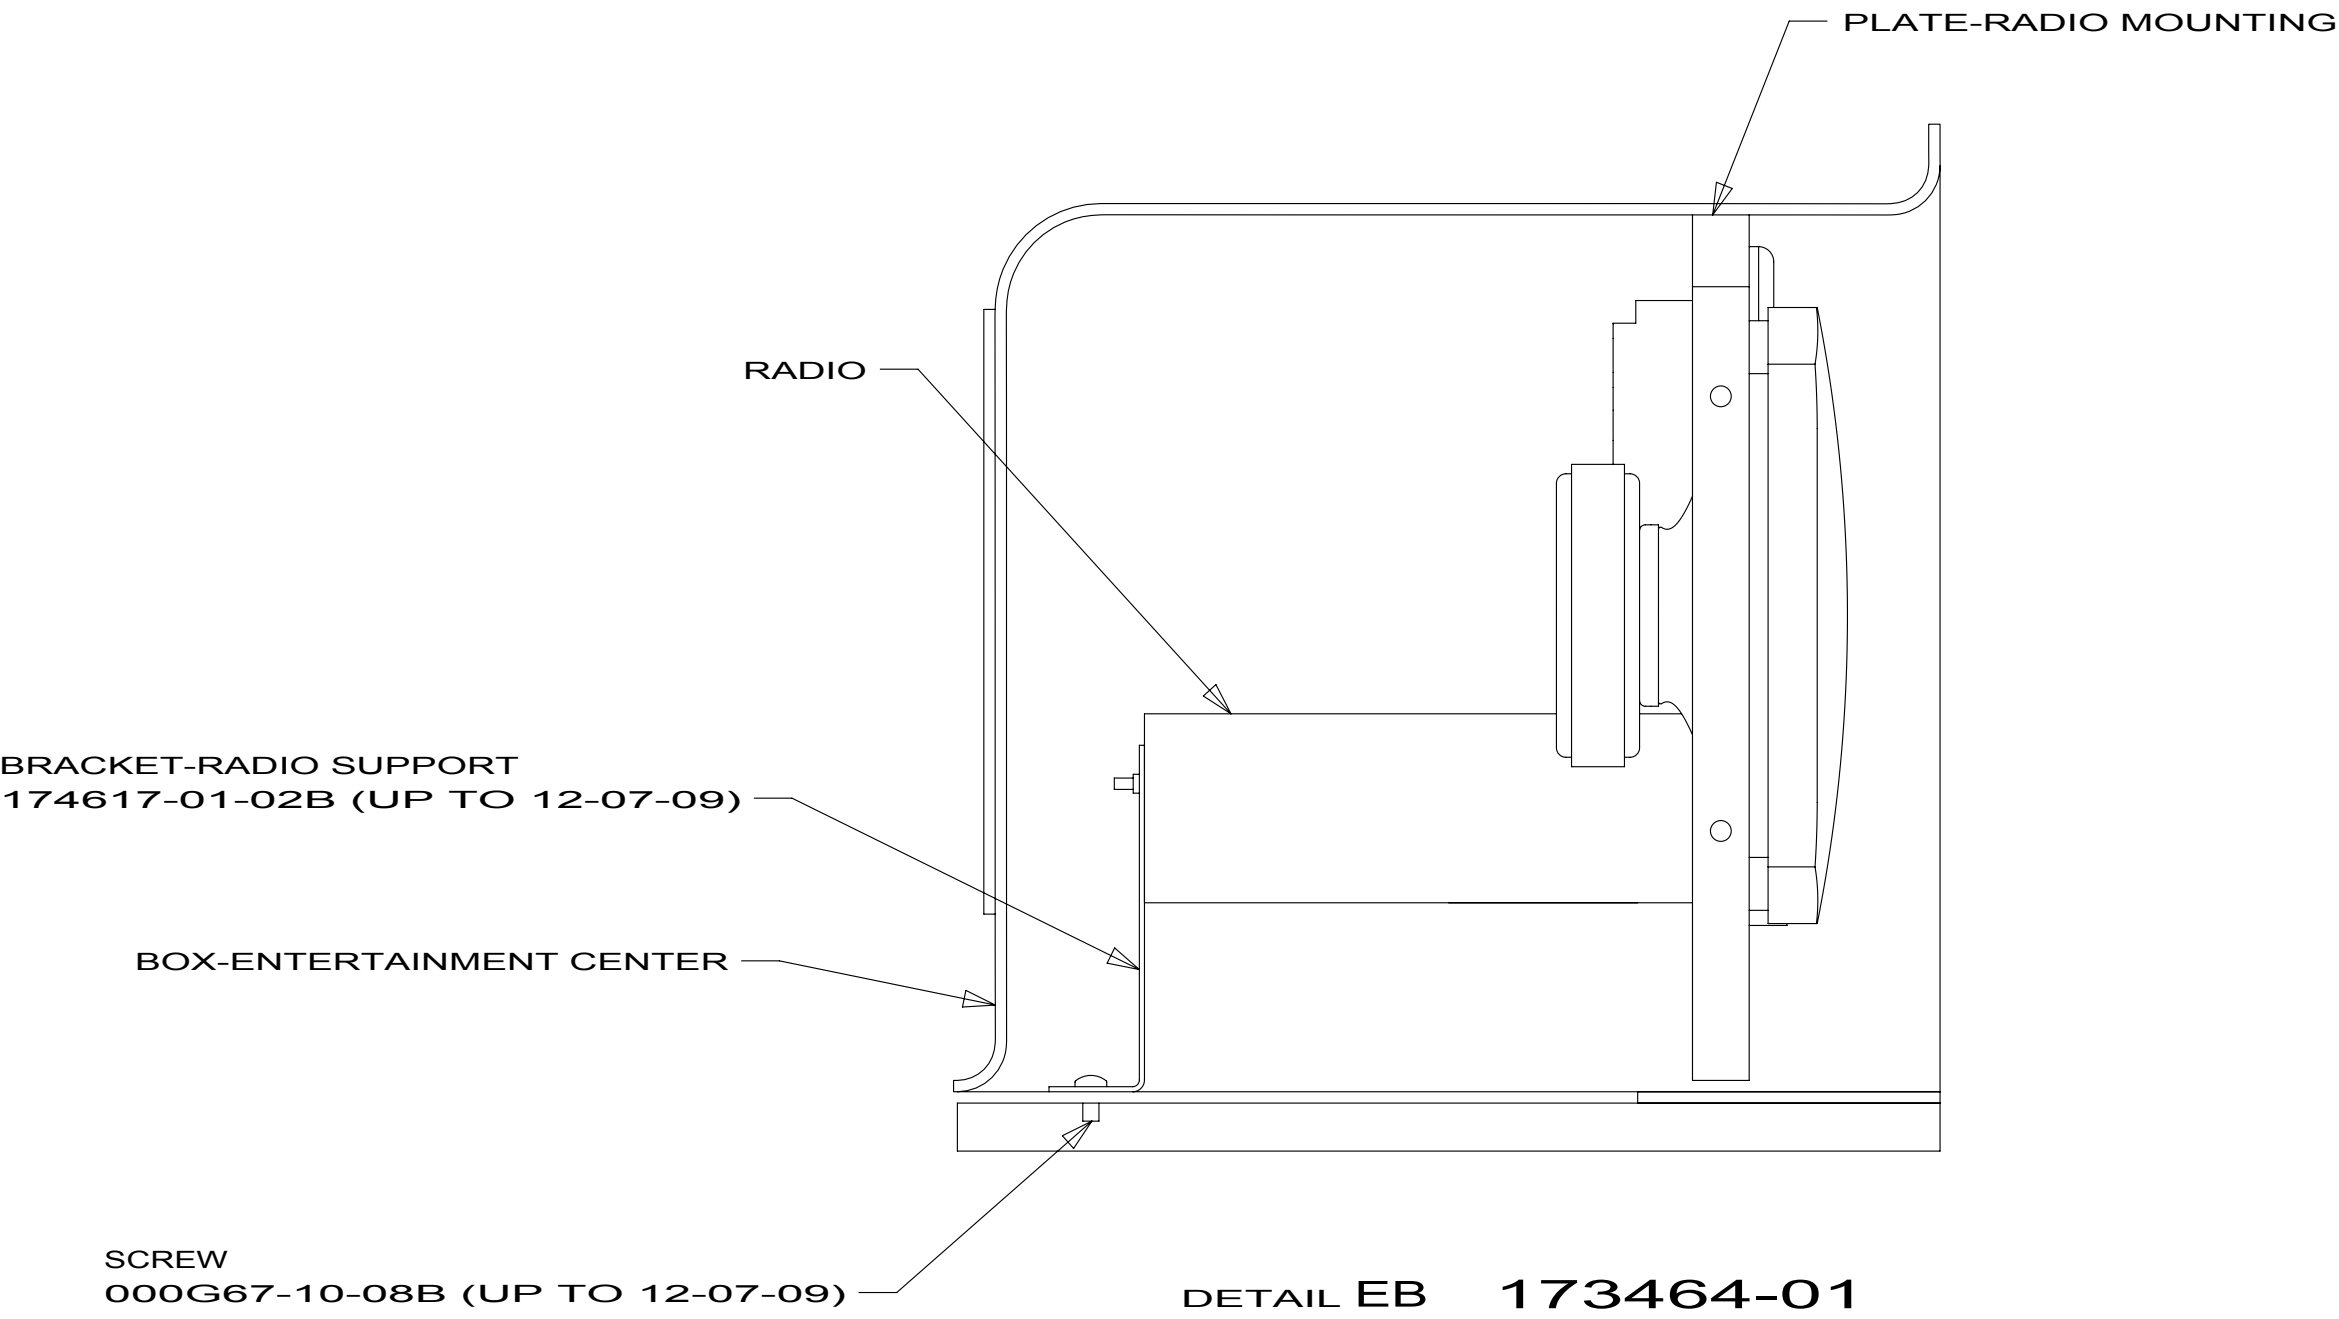

173464-01
173464-03
173464-07
173464-08

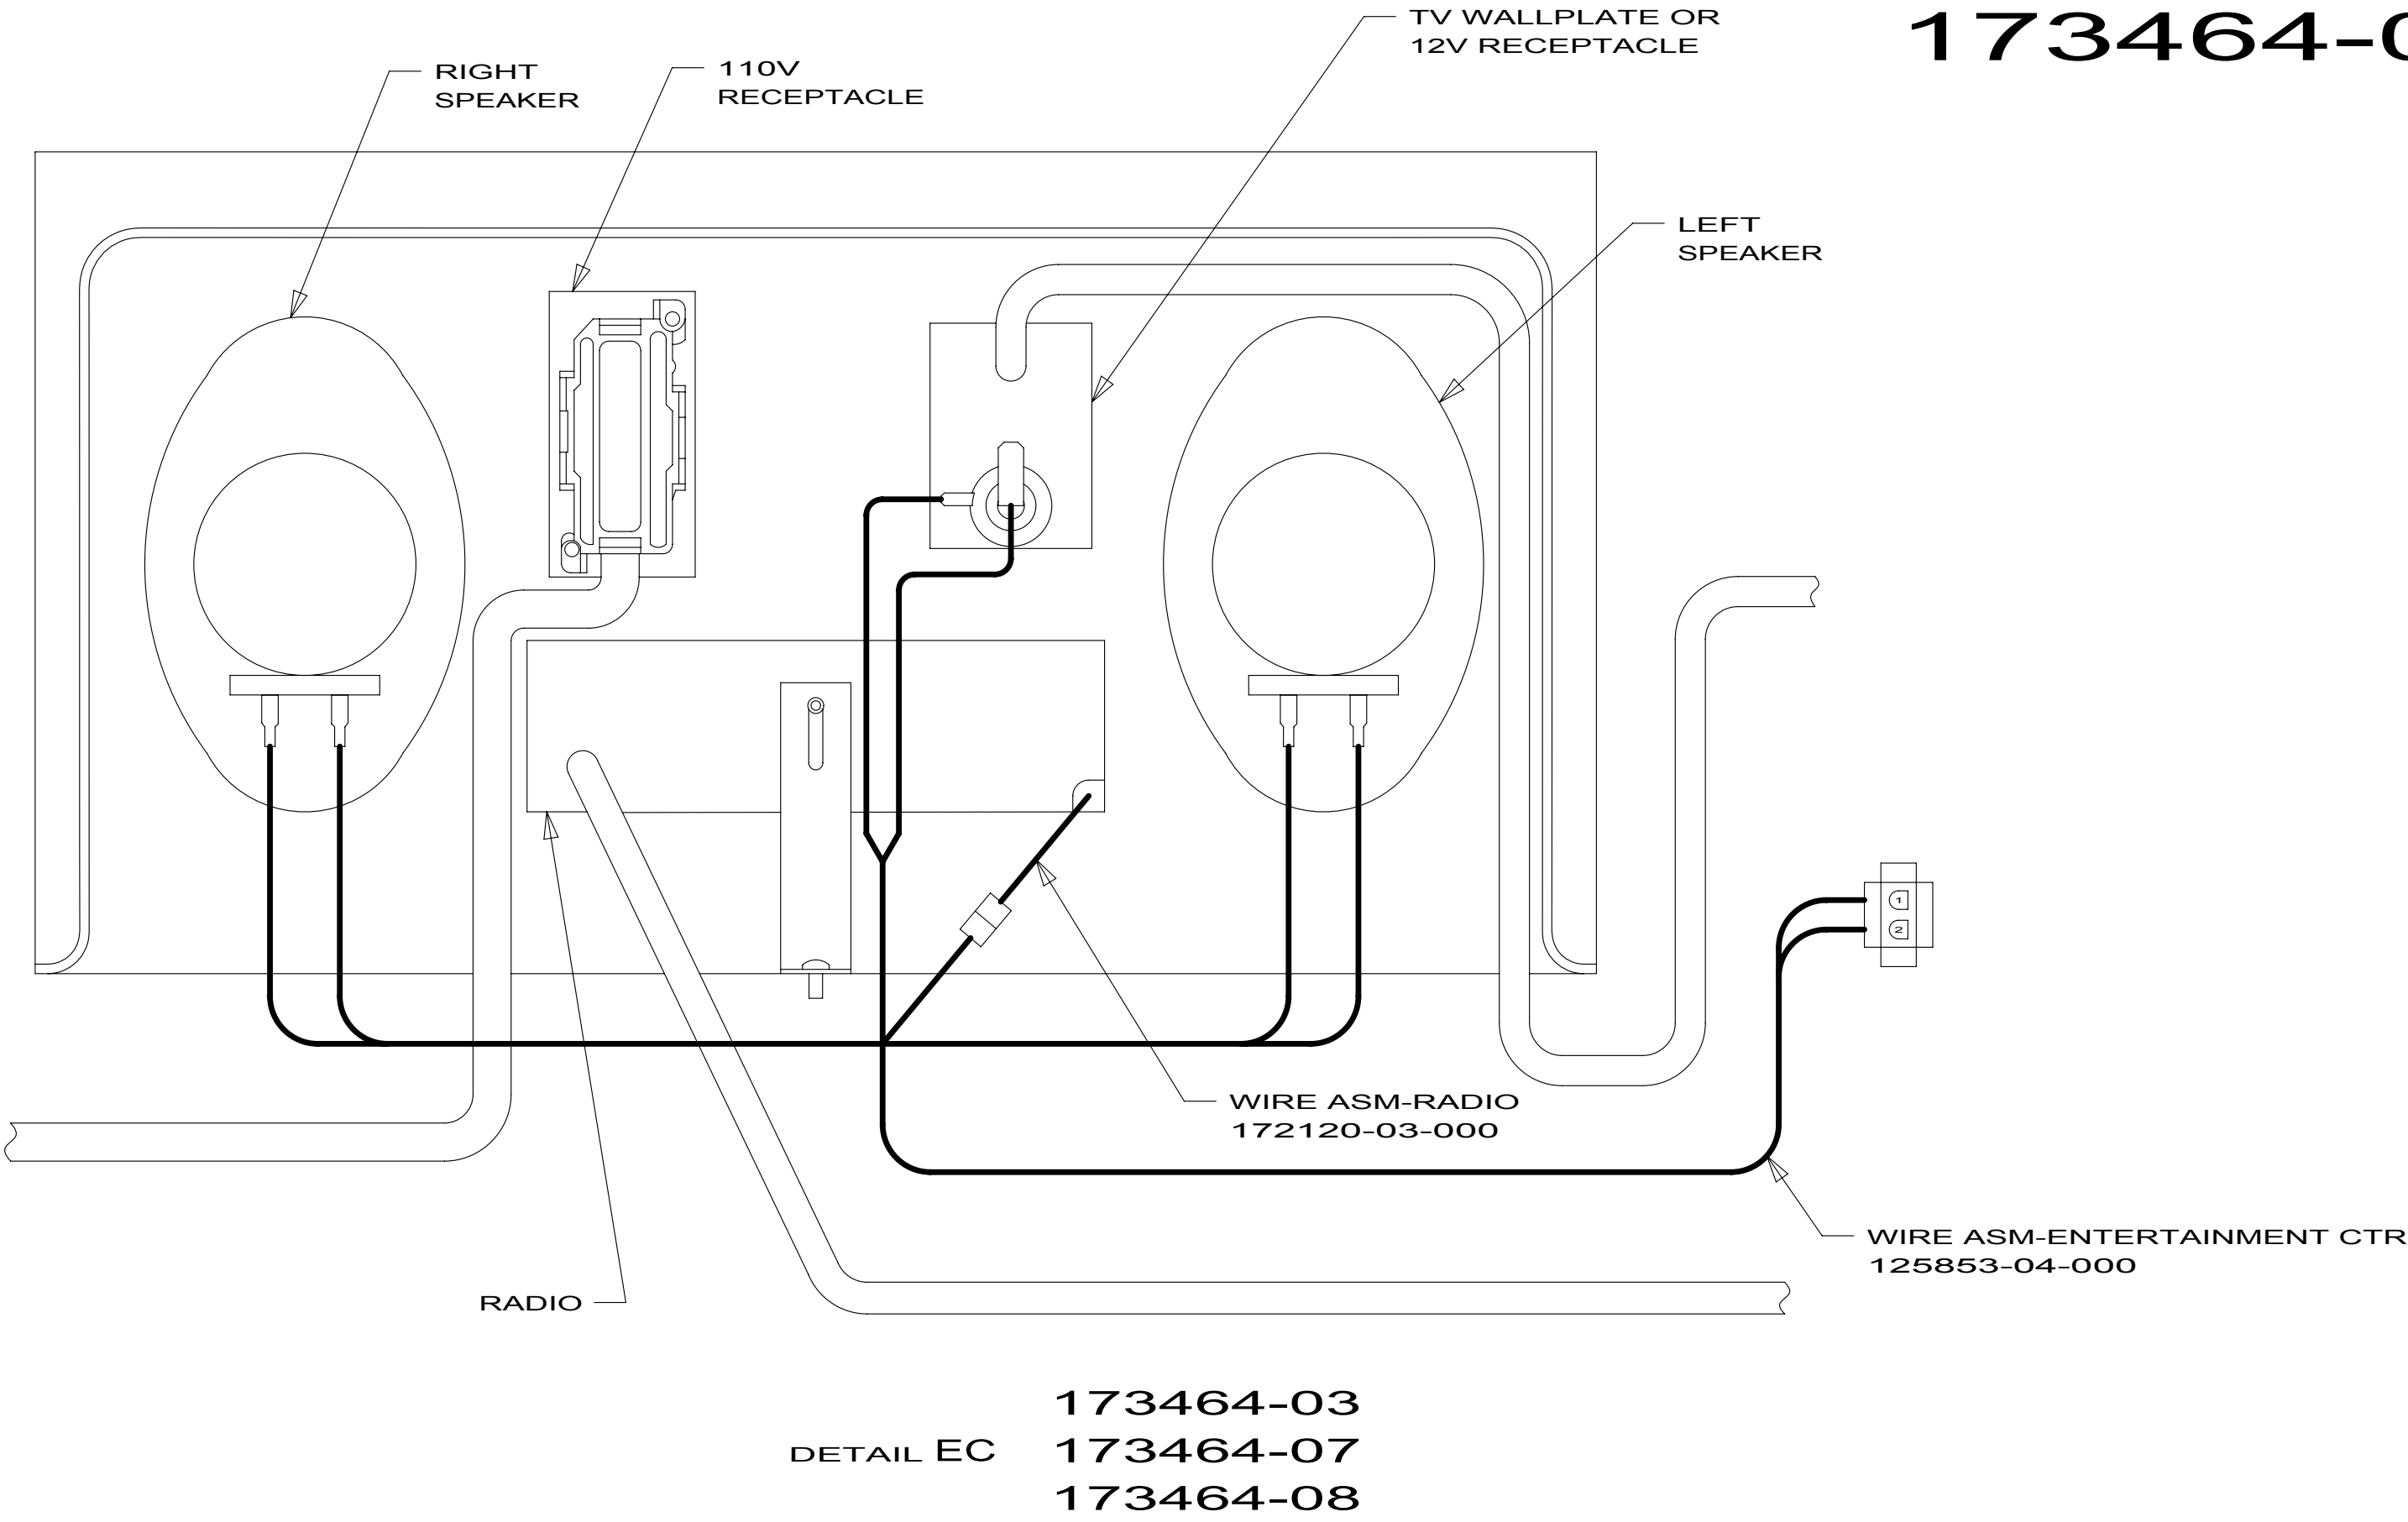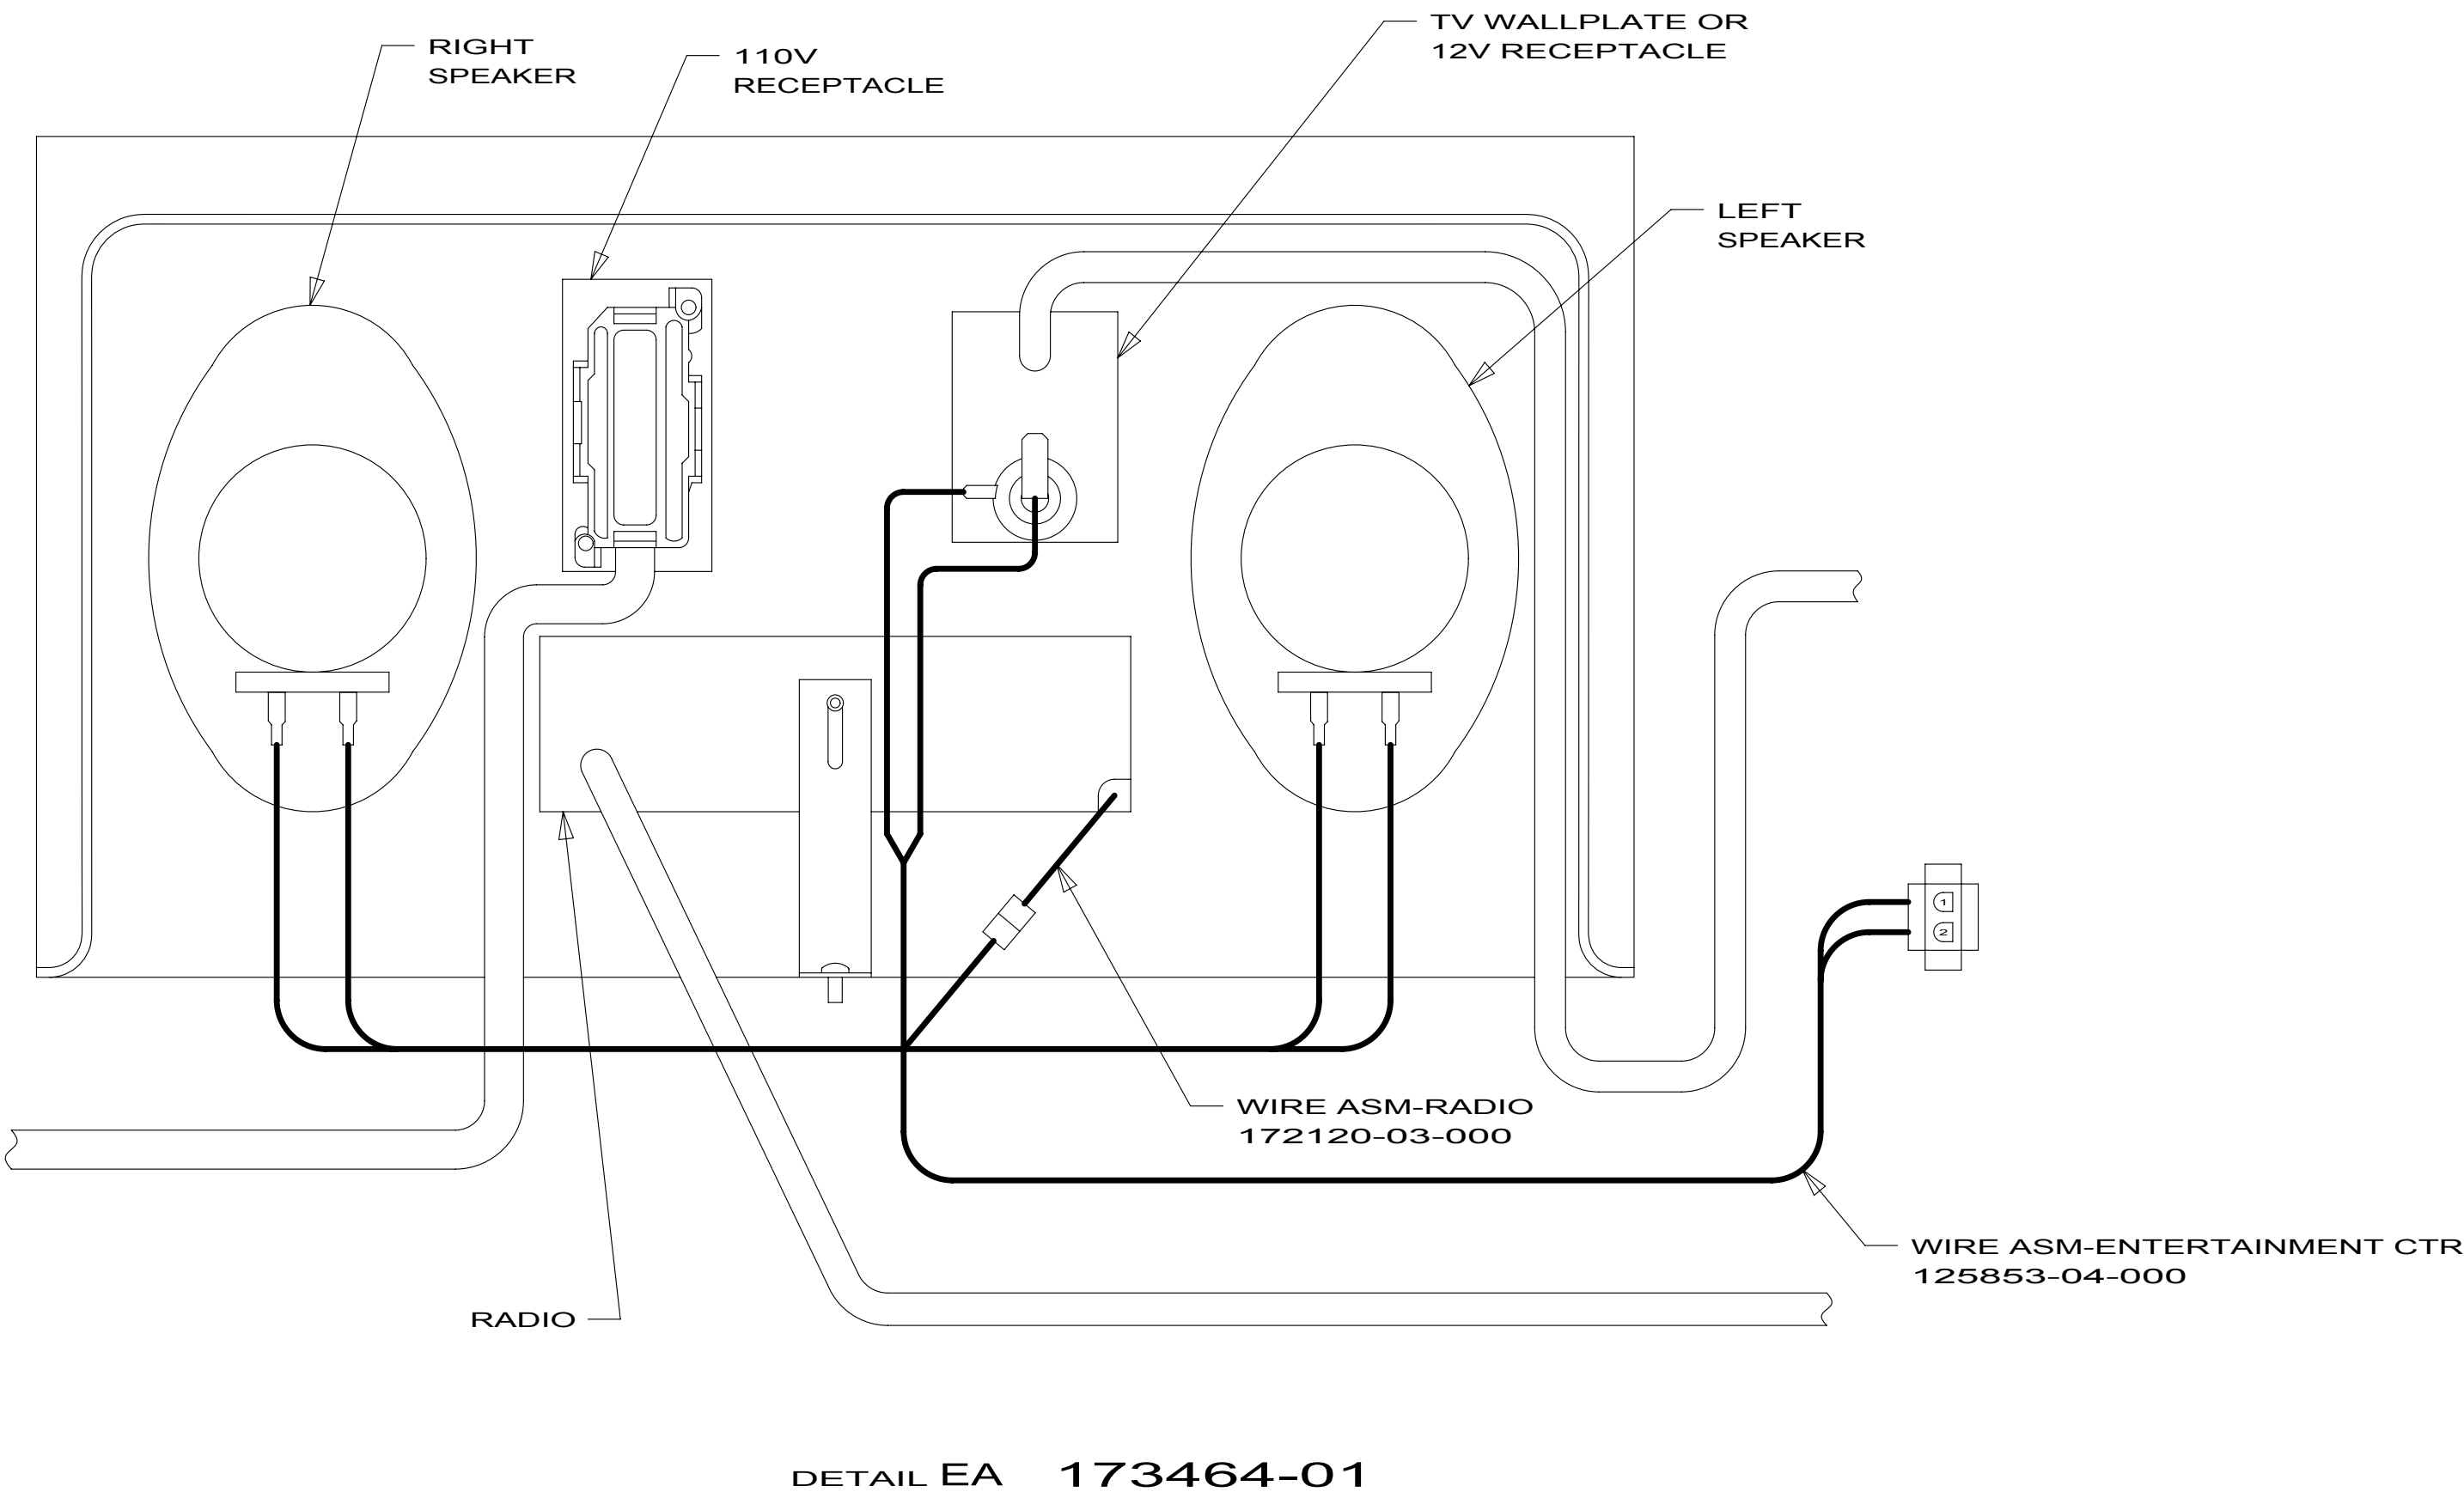

1D5 ENTERTAINMENT CENTER/EXT W/CD


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

10 MOTORHOMES

ENTERTAINMENT CENTER COMPL

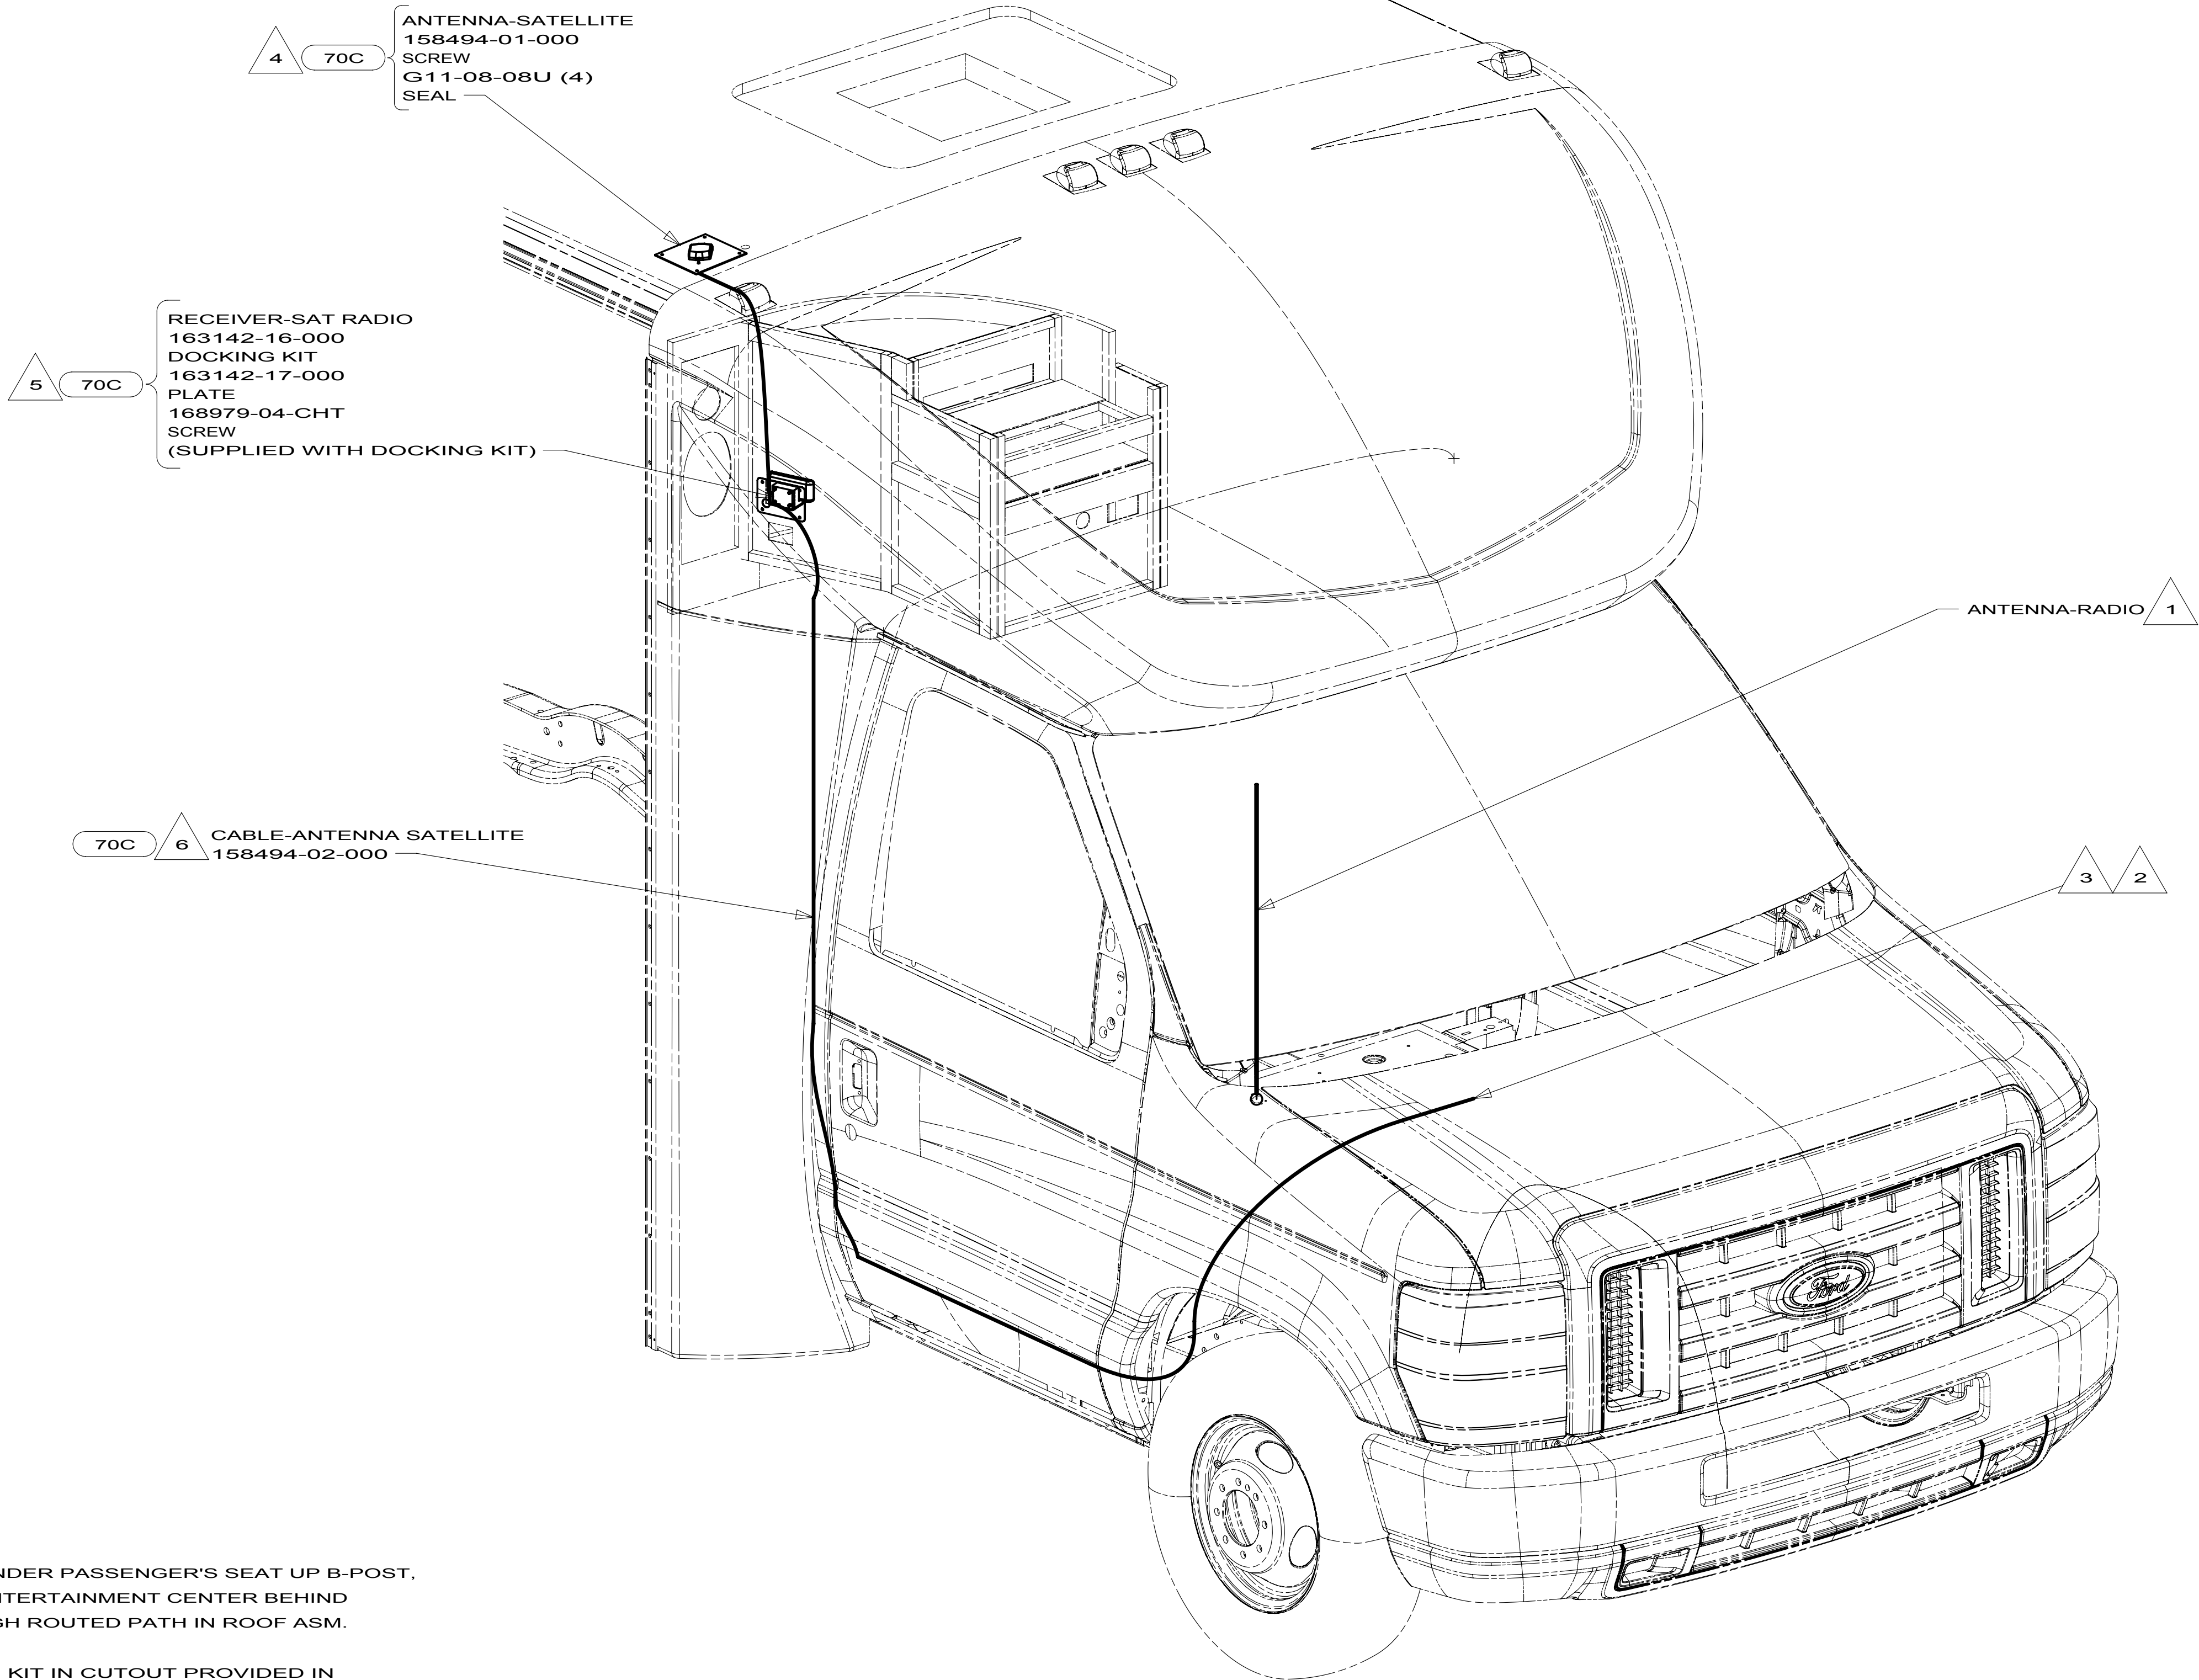

700-Series 169848-04

- 6 ROUTE ANTENNA CABLE FROM UNDER PASSENGER'S SEAT UP B-POST, INTO WINGWALL, UP THROUGH ENTERTAINMENT CENTER BEHIND SPEAKER, ROUTE CABLE THROUGH ROUTED PATH IN ROOF ASM.
- 5 MOUNT SAT RECEIVER DOCKING KIT IN CUTOUT PROVIDED IN THE FRONT ENTERTAINMENT CENTER.
- 4 MOUNT ANTENNA SUCH THAT BASE IS SQUARE WITH ROOF AND HOLE IS DIRECTLY OVER HOLE IN ROOF. SEAL BOTH THE HOLE IN THE ROOF AND ANTENNA BASE AT SCREWS.
- 3 RECEIVER CABLE SUPPLIED WITH RECEIVER.
- 2 ROUTE RECEIVER CABLE ALONG WITH CHASSIS HARNESS TO BATTERY BOOST SWITCH, CONTINUE RECEIVER CABLE TO DASH RADIO.
- 1 SUPPLIED WITH CHASSIS. USE SHORTEST ANTENNA.


NOTES:

- 70C RADIO - SATELLITE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ANTENNA INSTL-RADIO AND CB		
SHEET 4	PART NO 169848	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

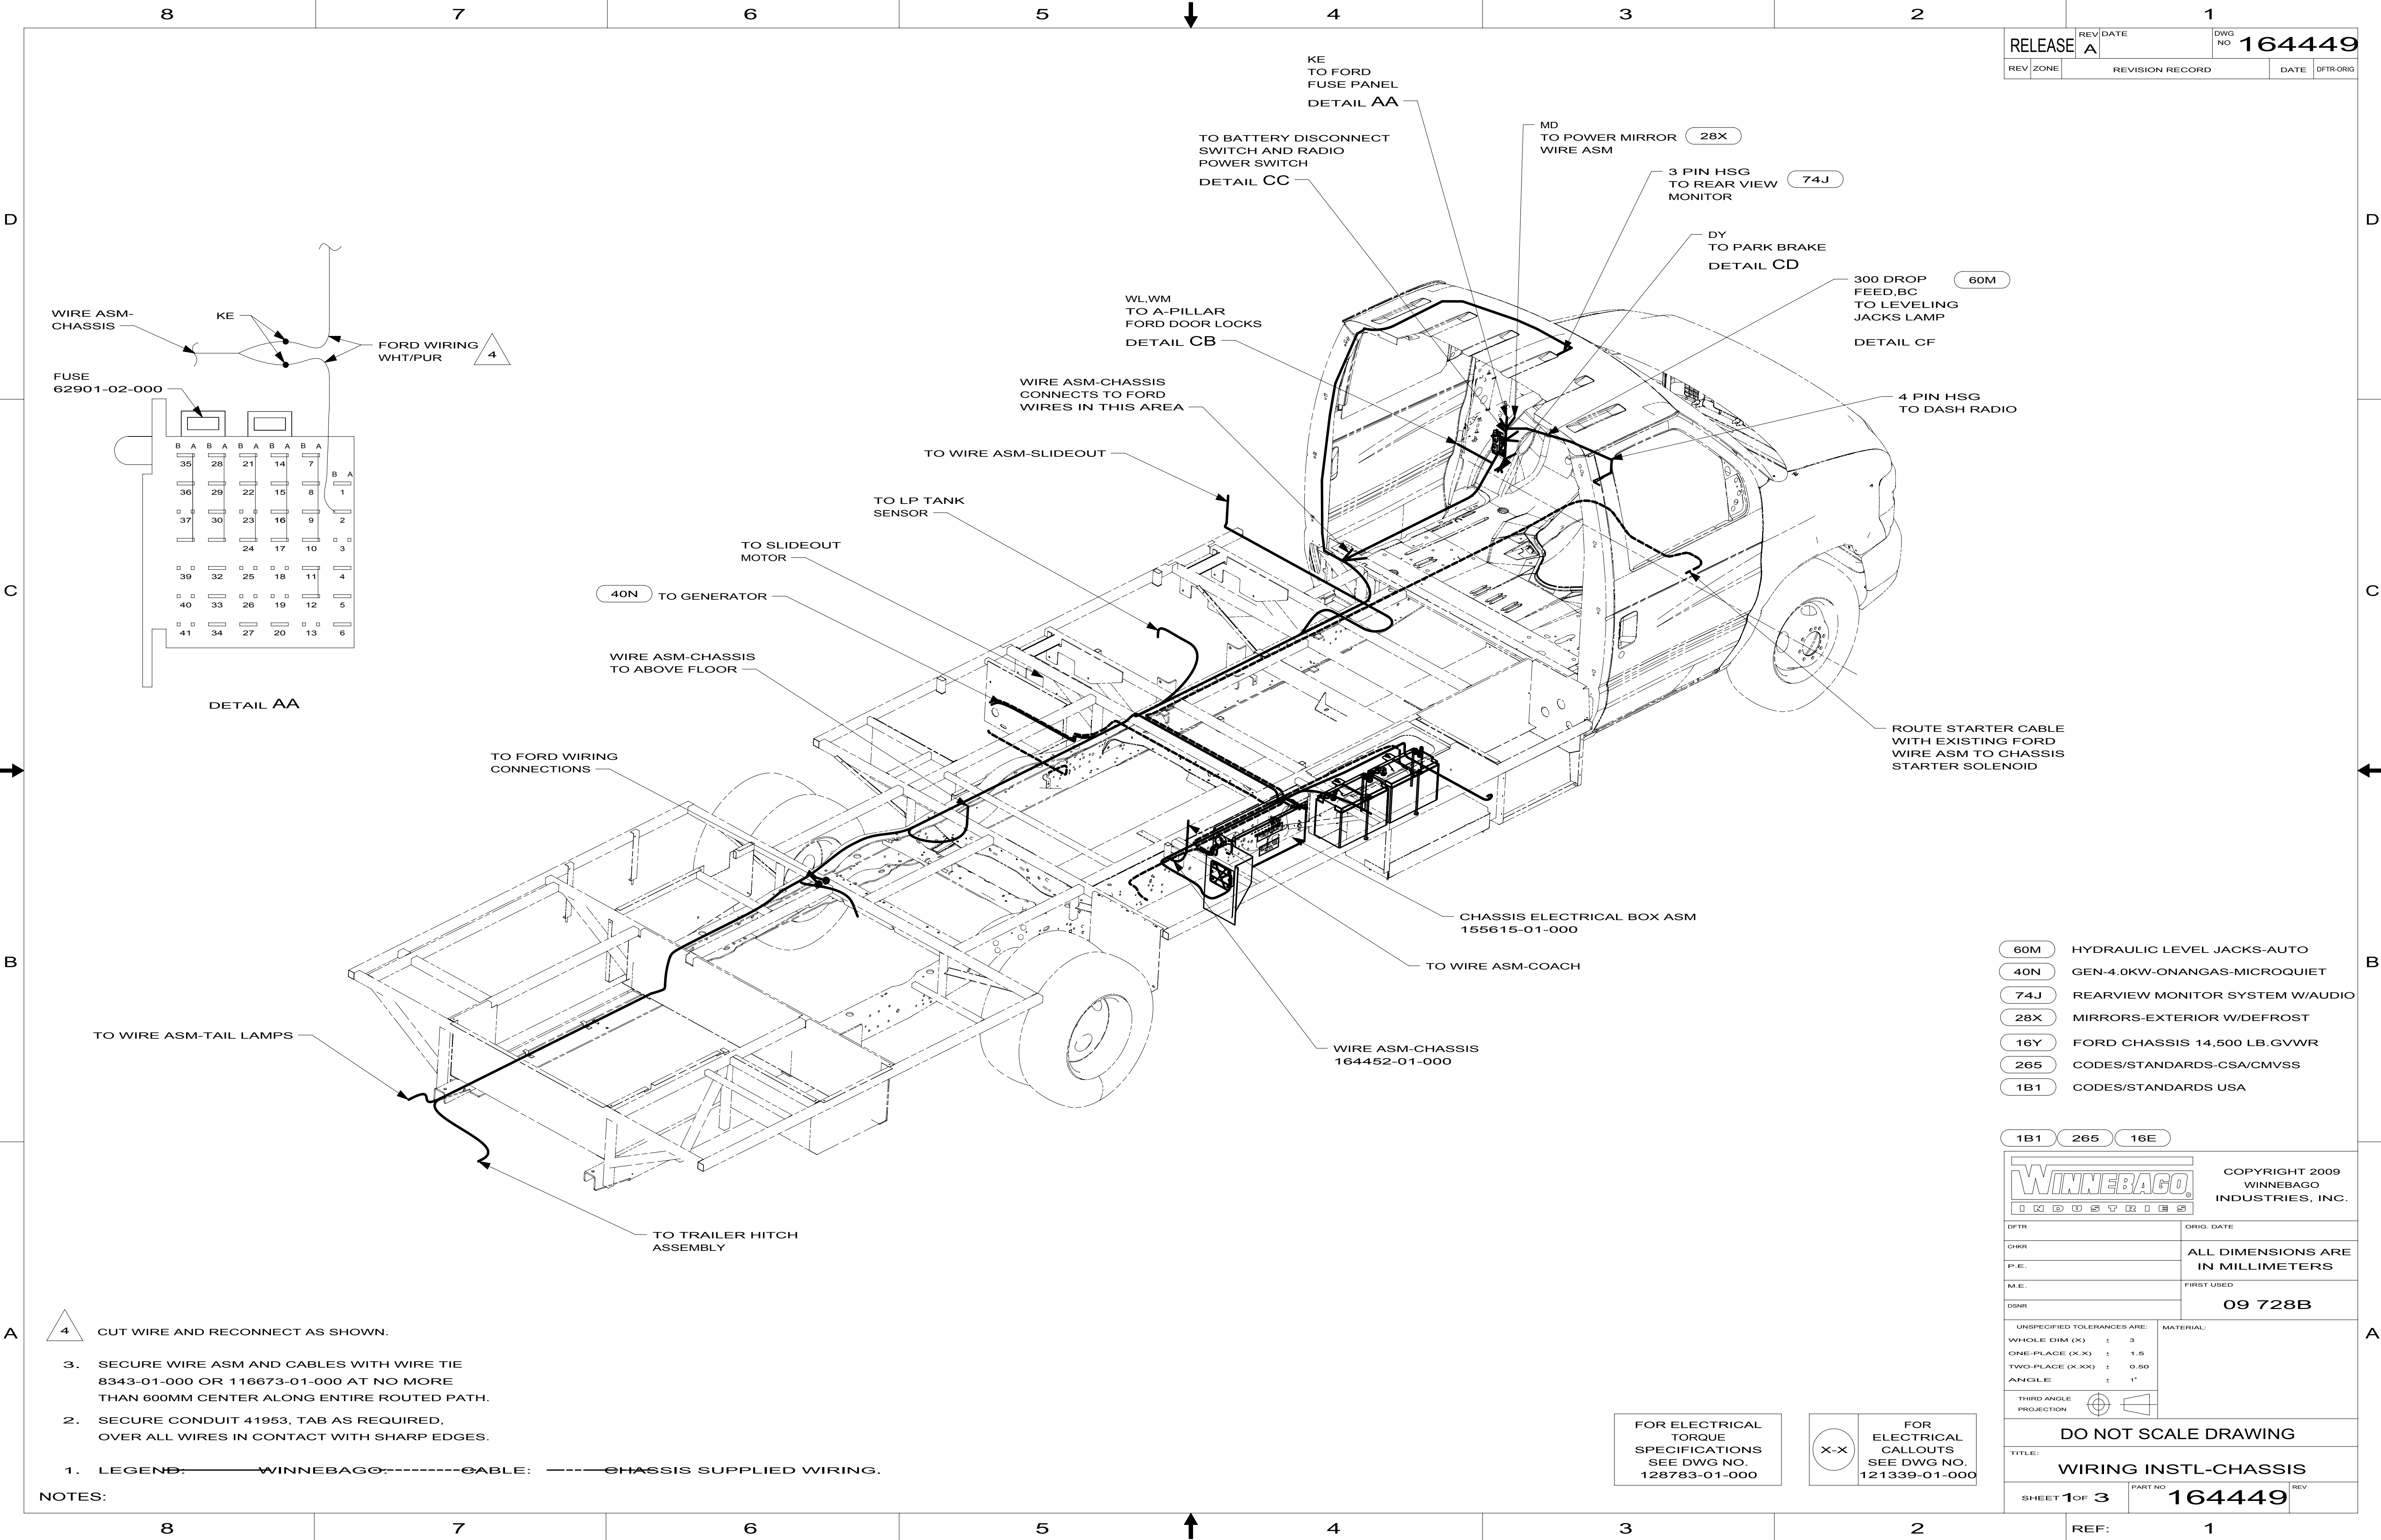

- 60M HYDRAULIC LEVEL JACKS-AUTO
- 40N GEN-4.0KW-ONANGAS-MICROQUIET
- 74J REARVIEW MONITOR SYSTEM W/AUDIO
- 28X MIRRORS-EXTERIOR W/DEFROST
- 16Y FORD CHASSIS 14,500 LB.GVWR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.


DFT-ORIG	ORIG. DATE
CHK-OR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	
DSNR	FIRST USED
09 728B	
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	

- NOTES:
- 4 CUT WIRE AND RECONNECT AS SHOWN.
3. SECURE WIRE ASM AND CABLES WITH WIRE TIE 8343-01-000 OR 116673-01-000 AT NO MORE THAN 600MM CENTER ALONG ENTIRE ROUTED PATH.
2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
1. LEGEND: — WINNEBAGO; - - - - - CABLE; - - - - - CHASSIS SUPPLIED WIRING.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

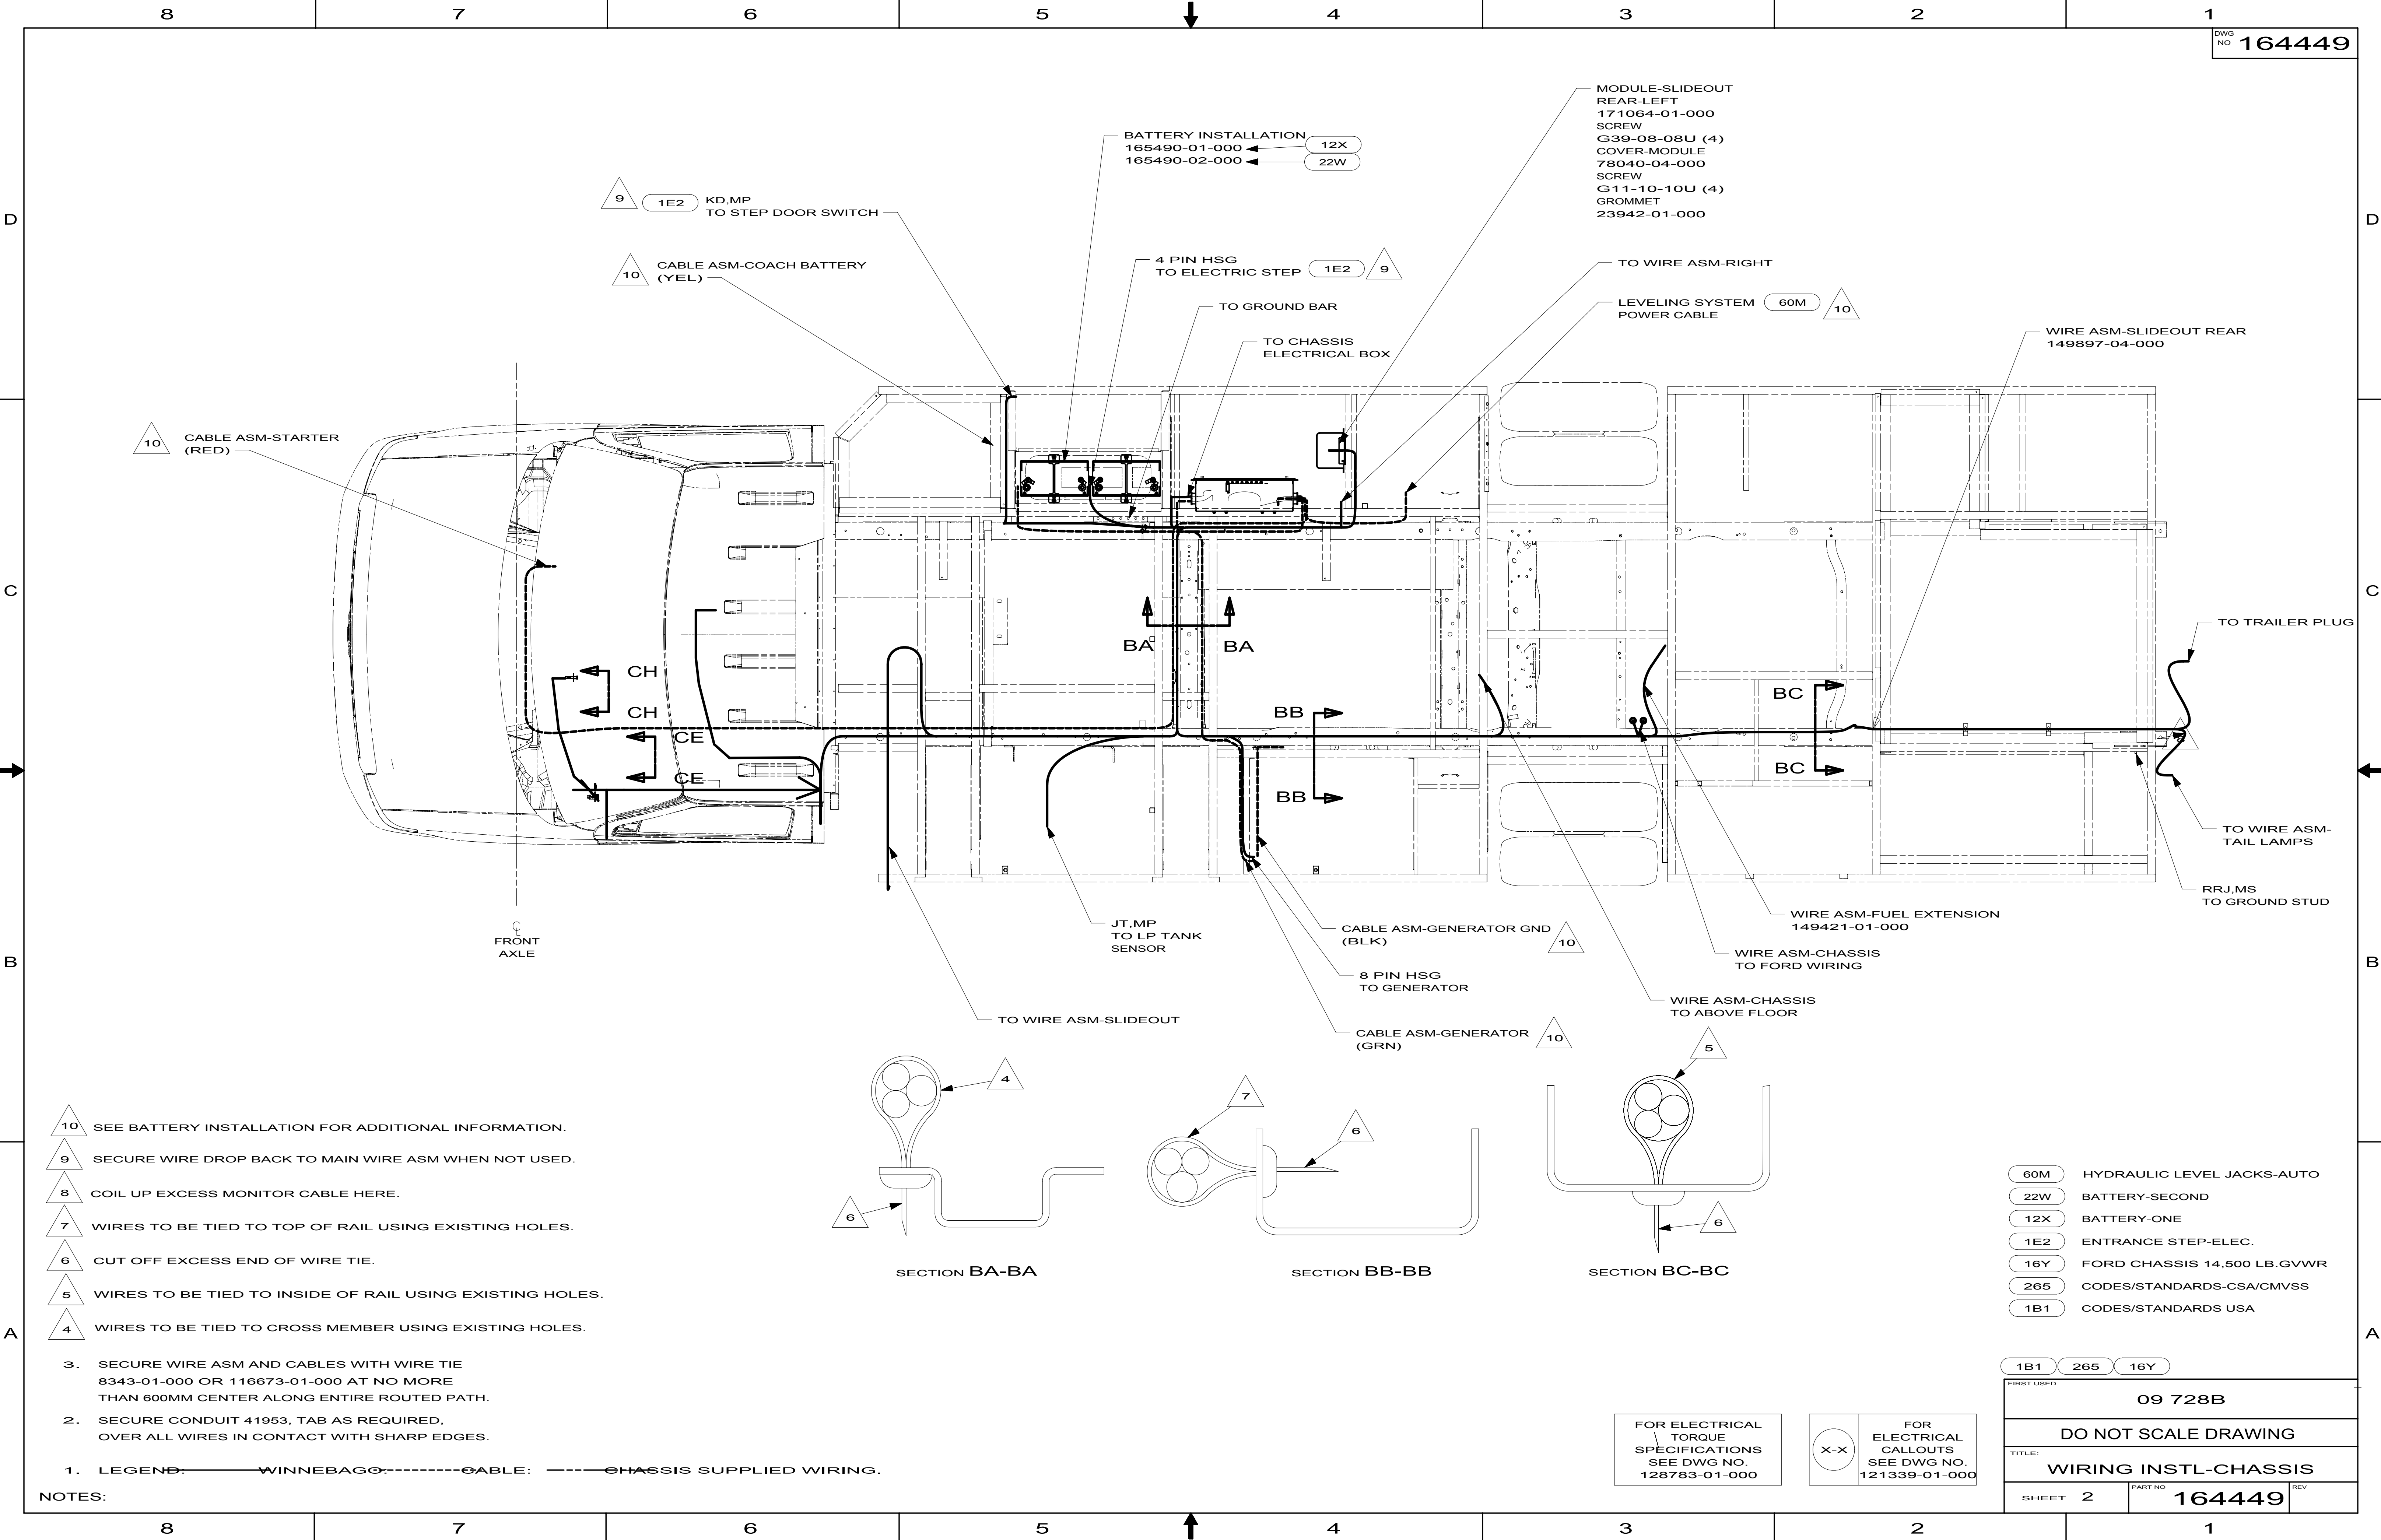


NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED		09 728B	
DO NOT SCALE DRAWING			
TITLE:		WIRING INSTL-CHASSIS	
SHEET 2	PART NO	164449	REV

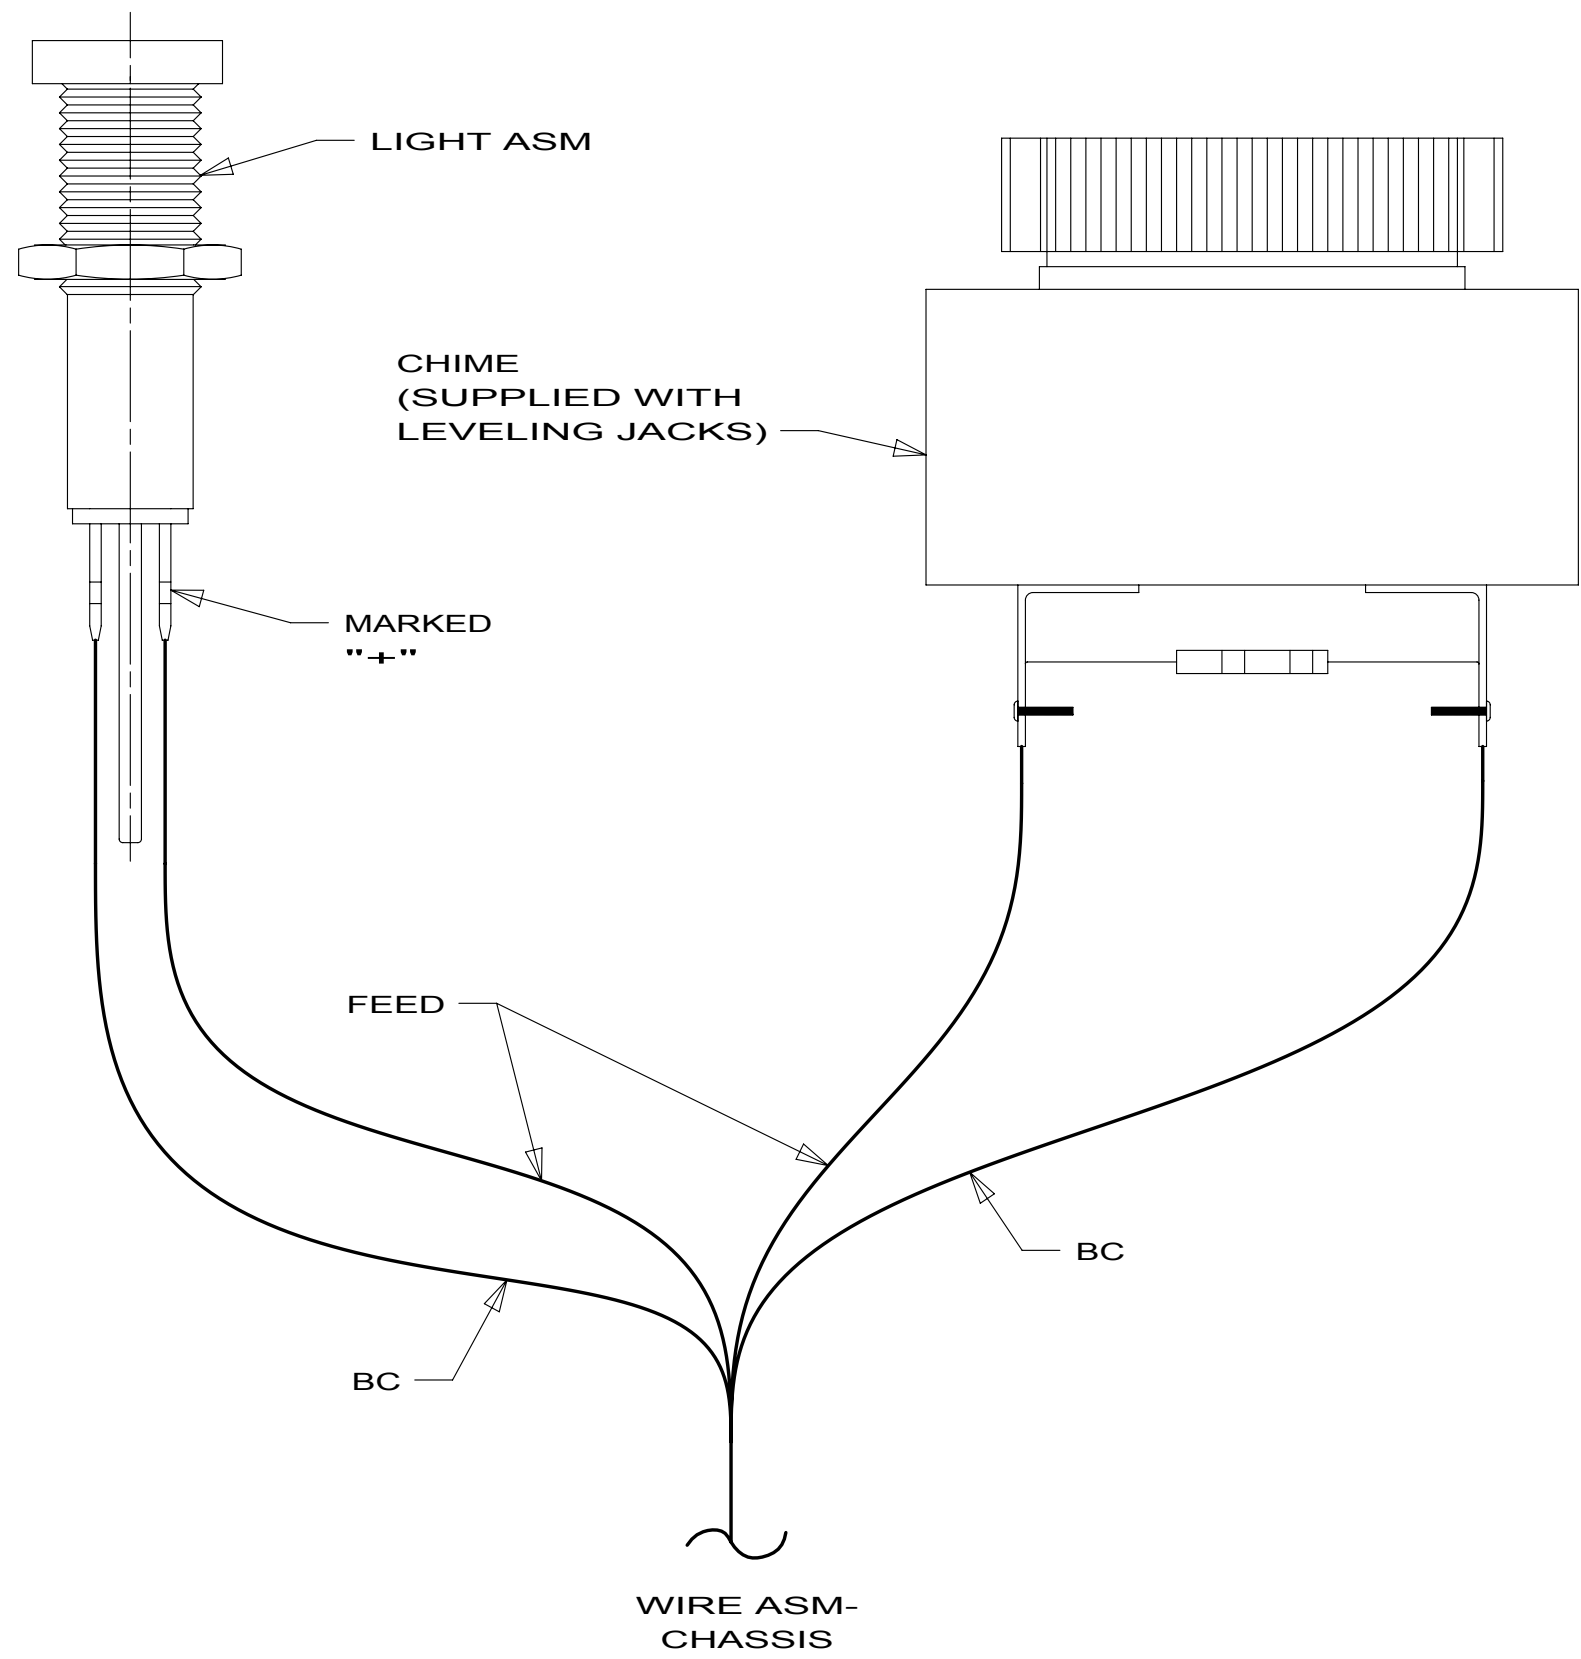


DETAIL CG 60M

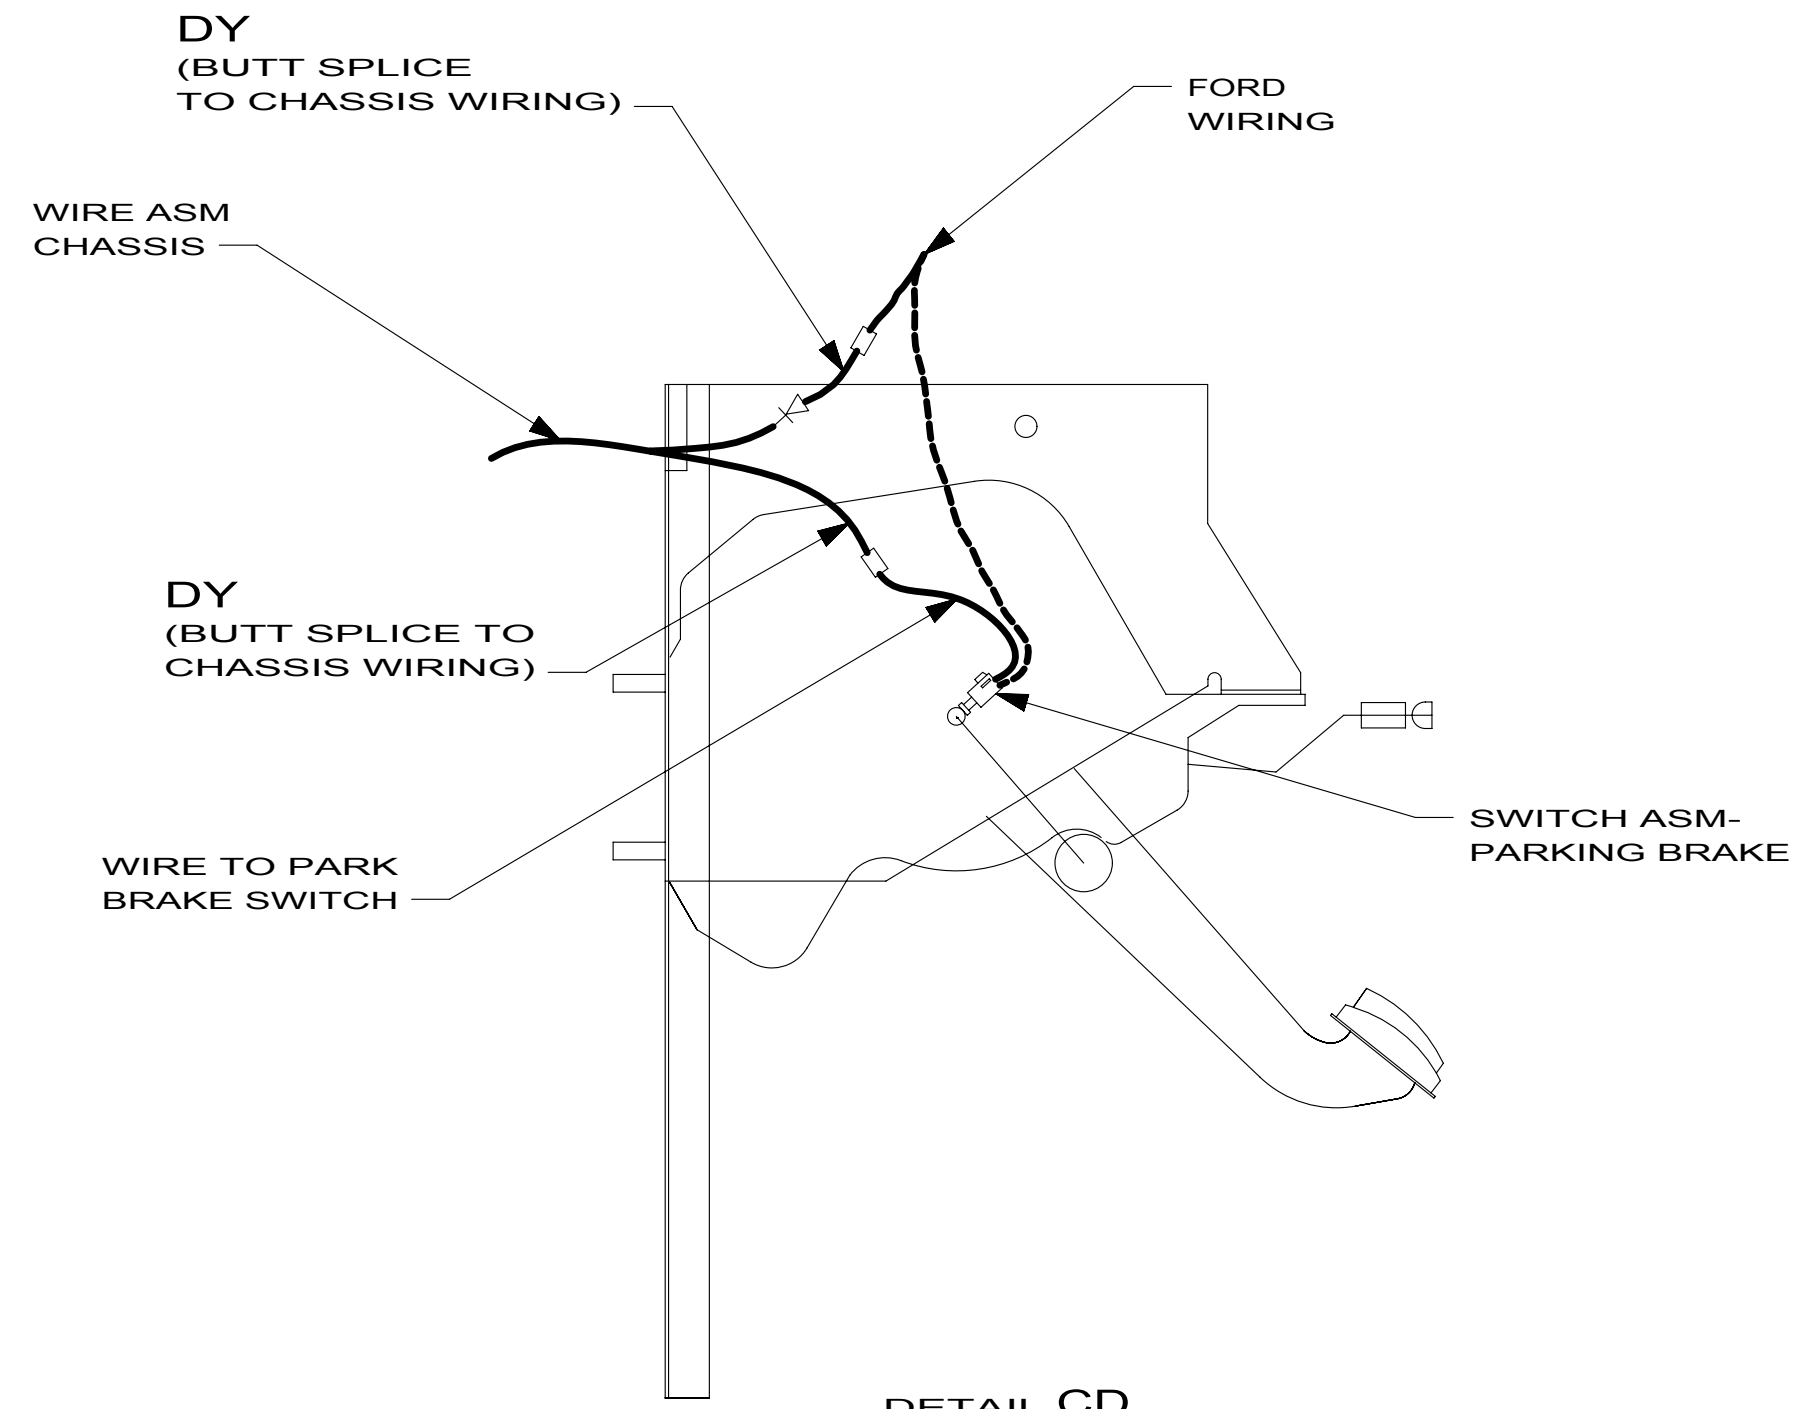


DETAIL CD


WIRE ASM-CHASSIS
(REF)

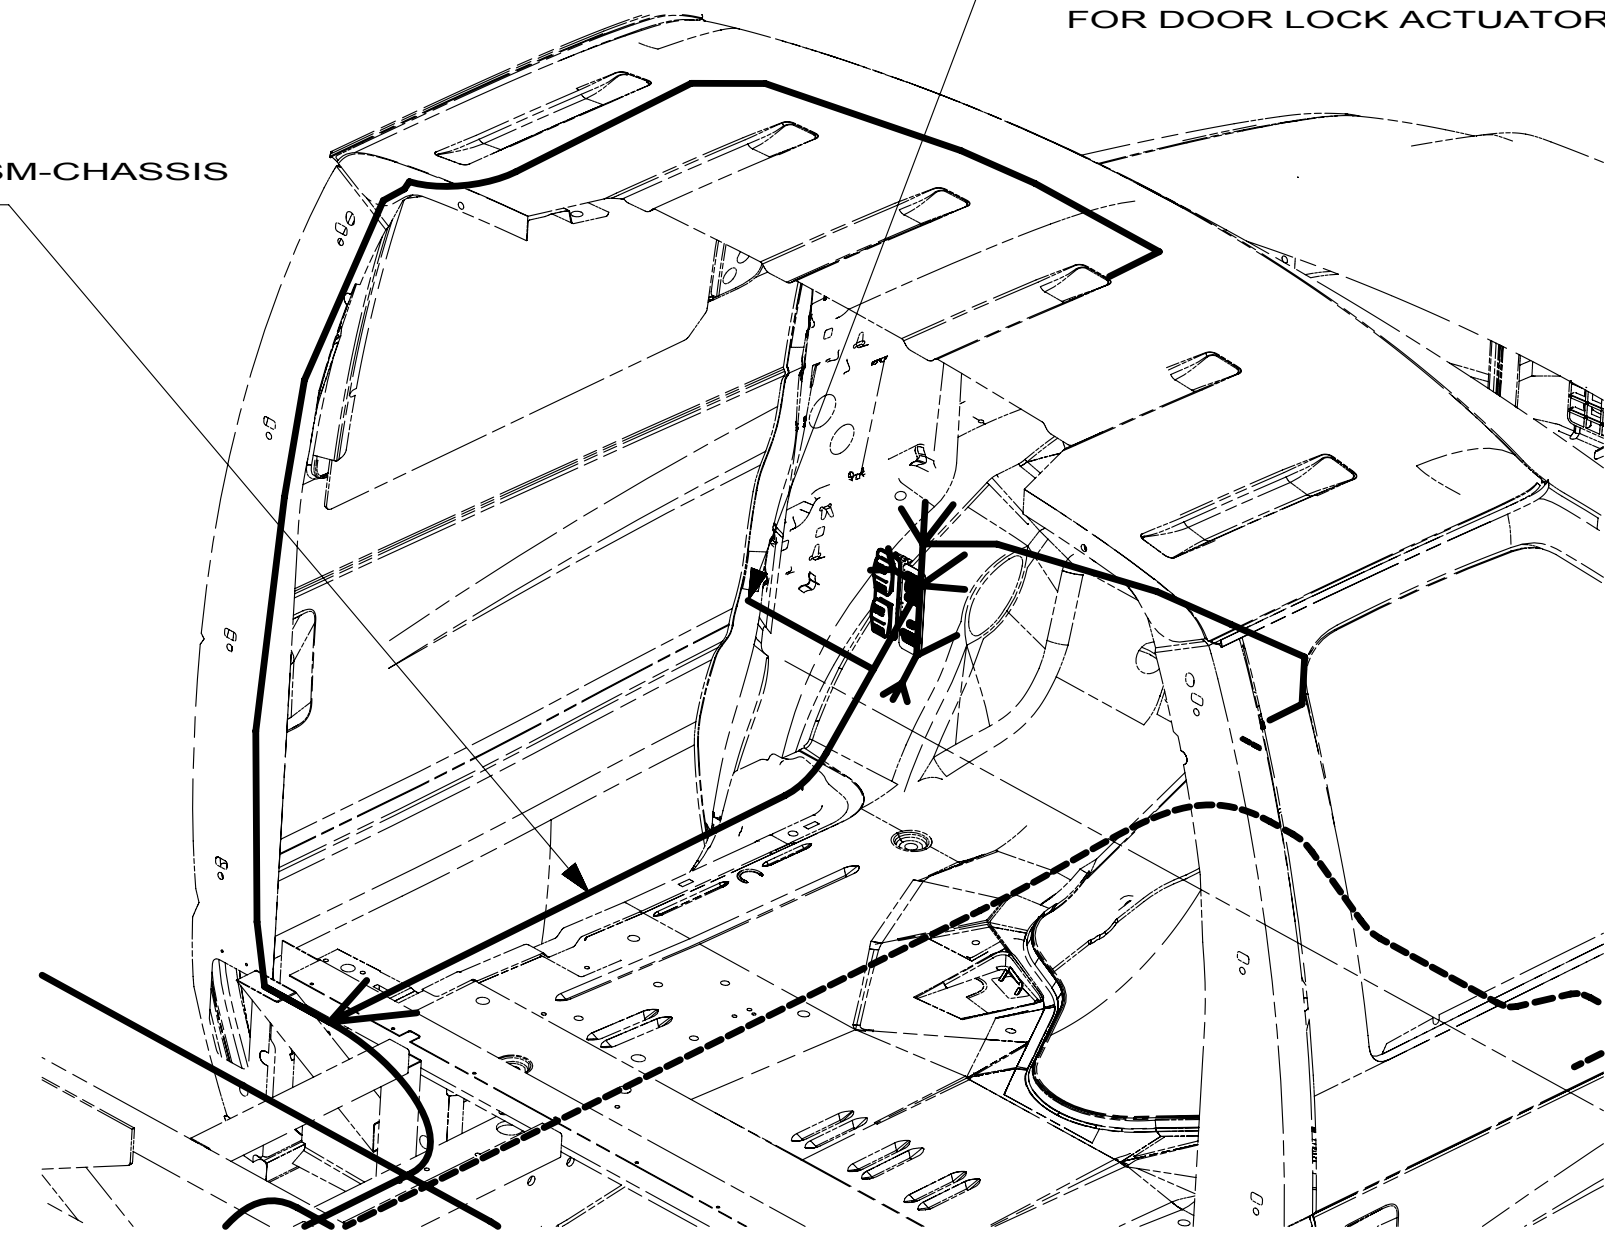


DETAIL CB 16E

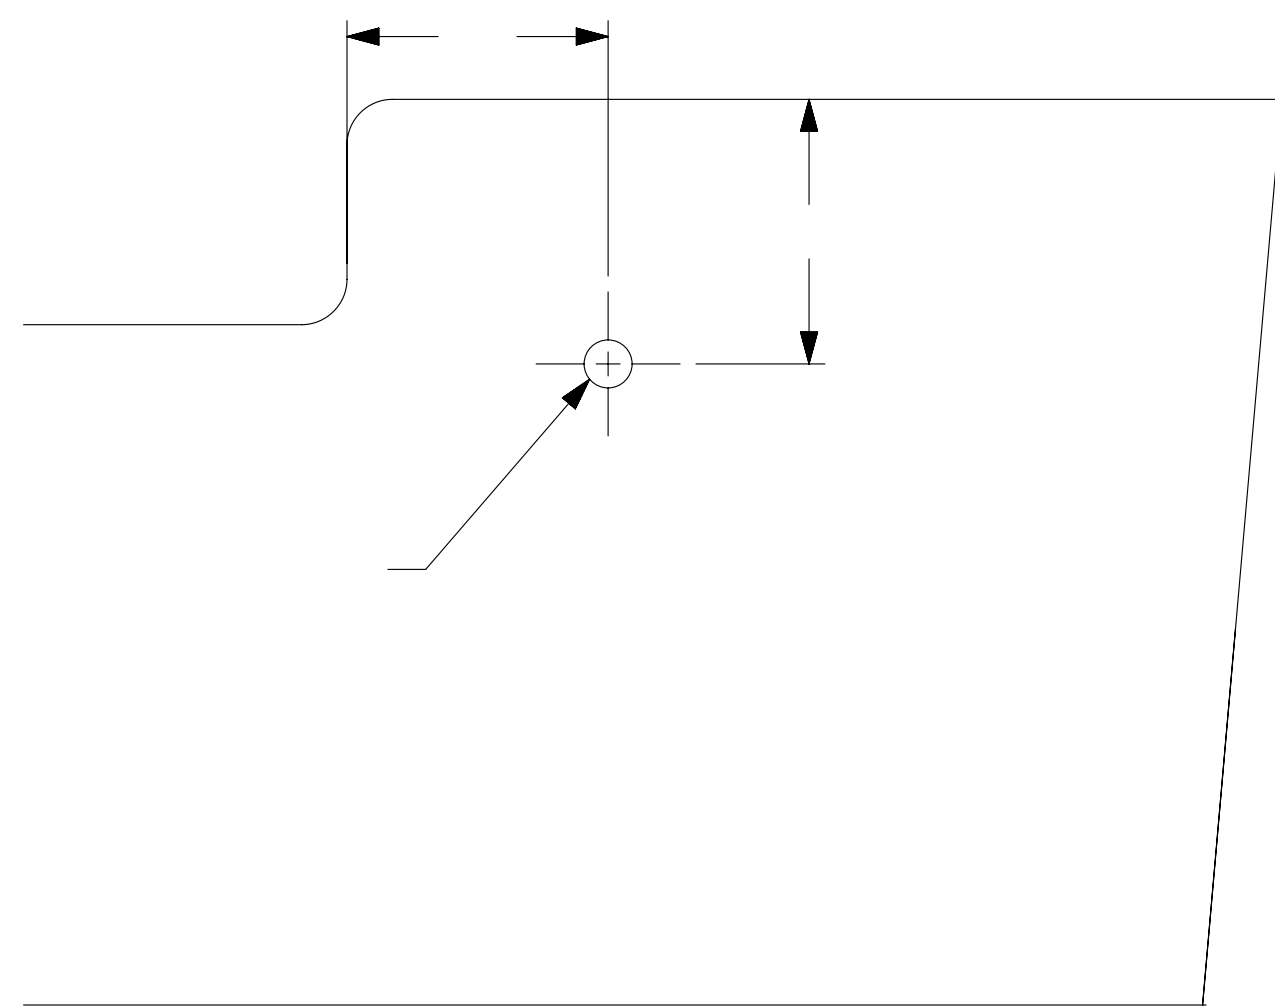

DETAIL CH 60M

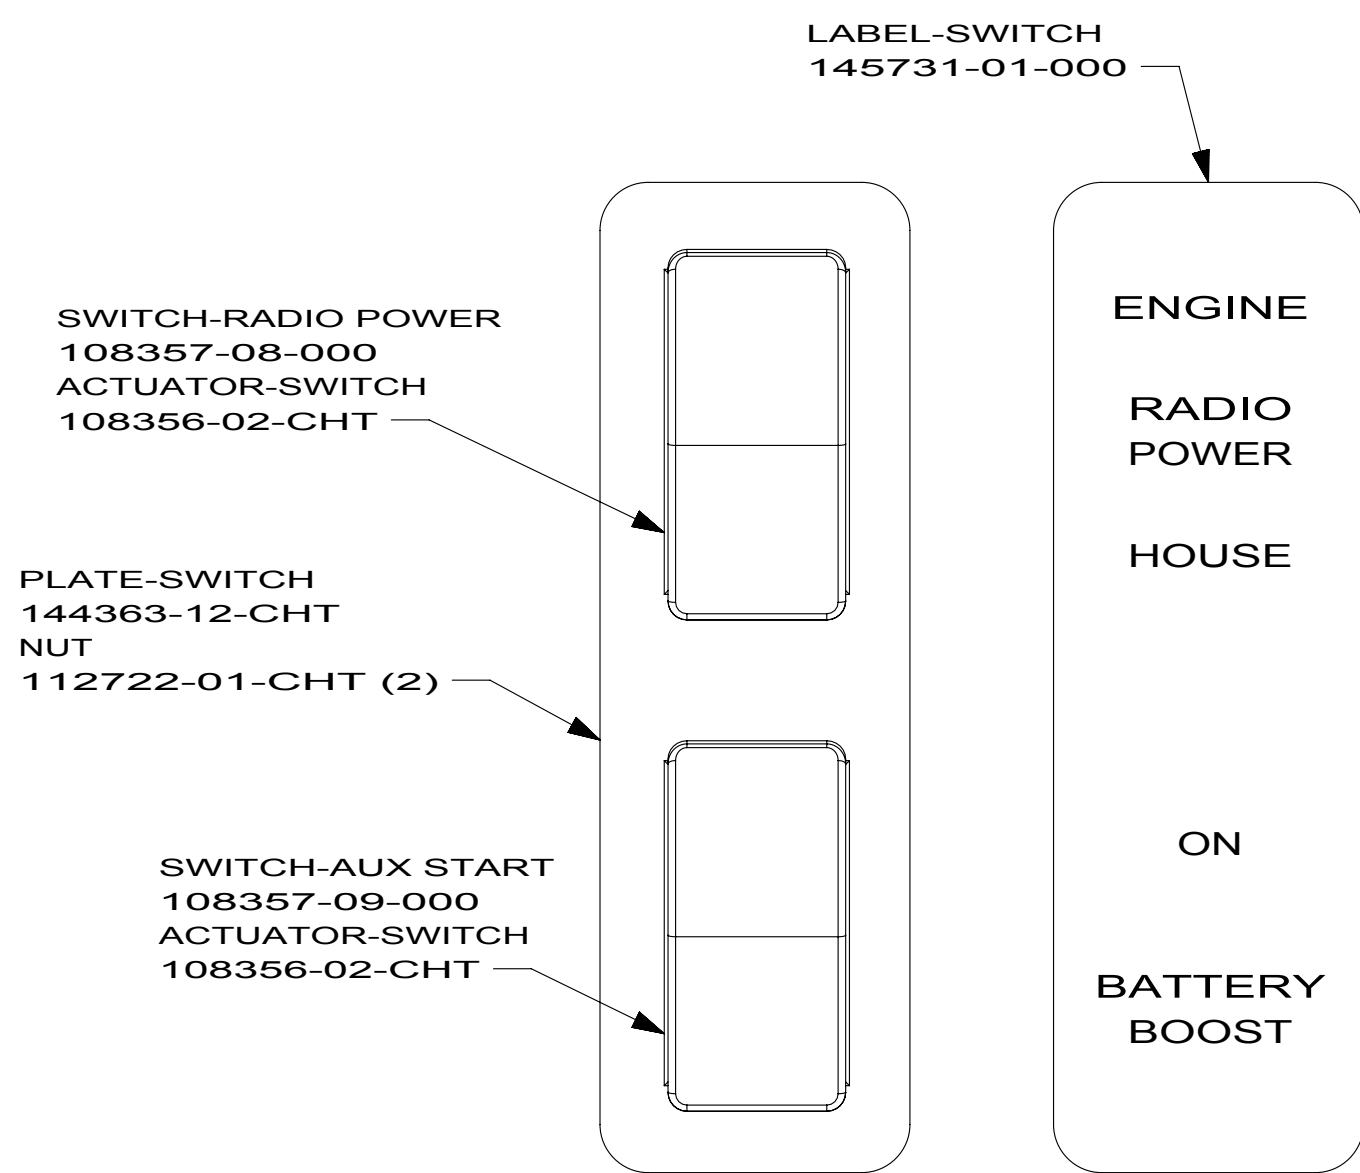

DETAIL CC 16Y

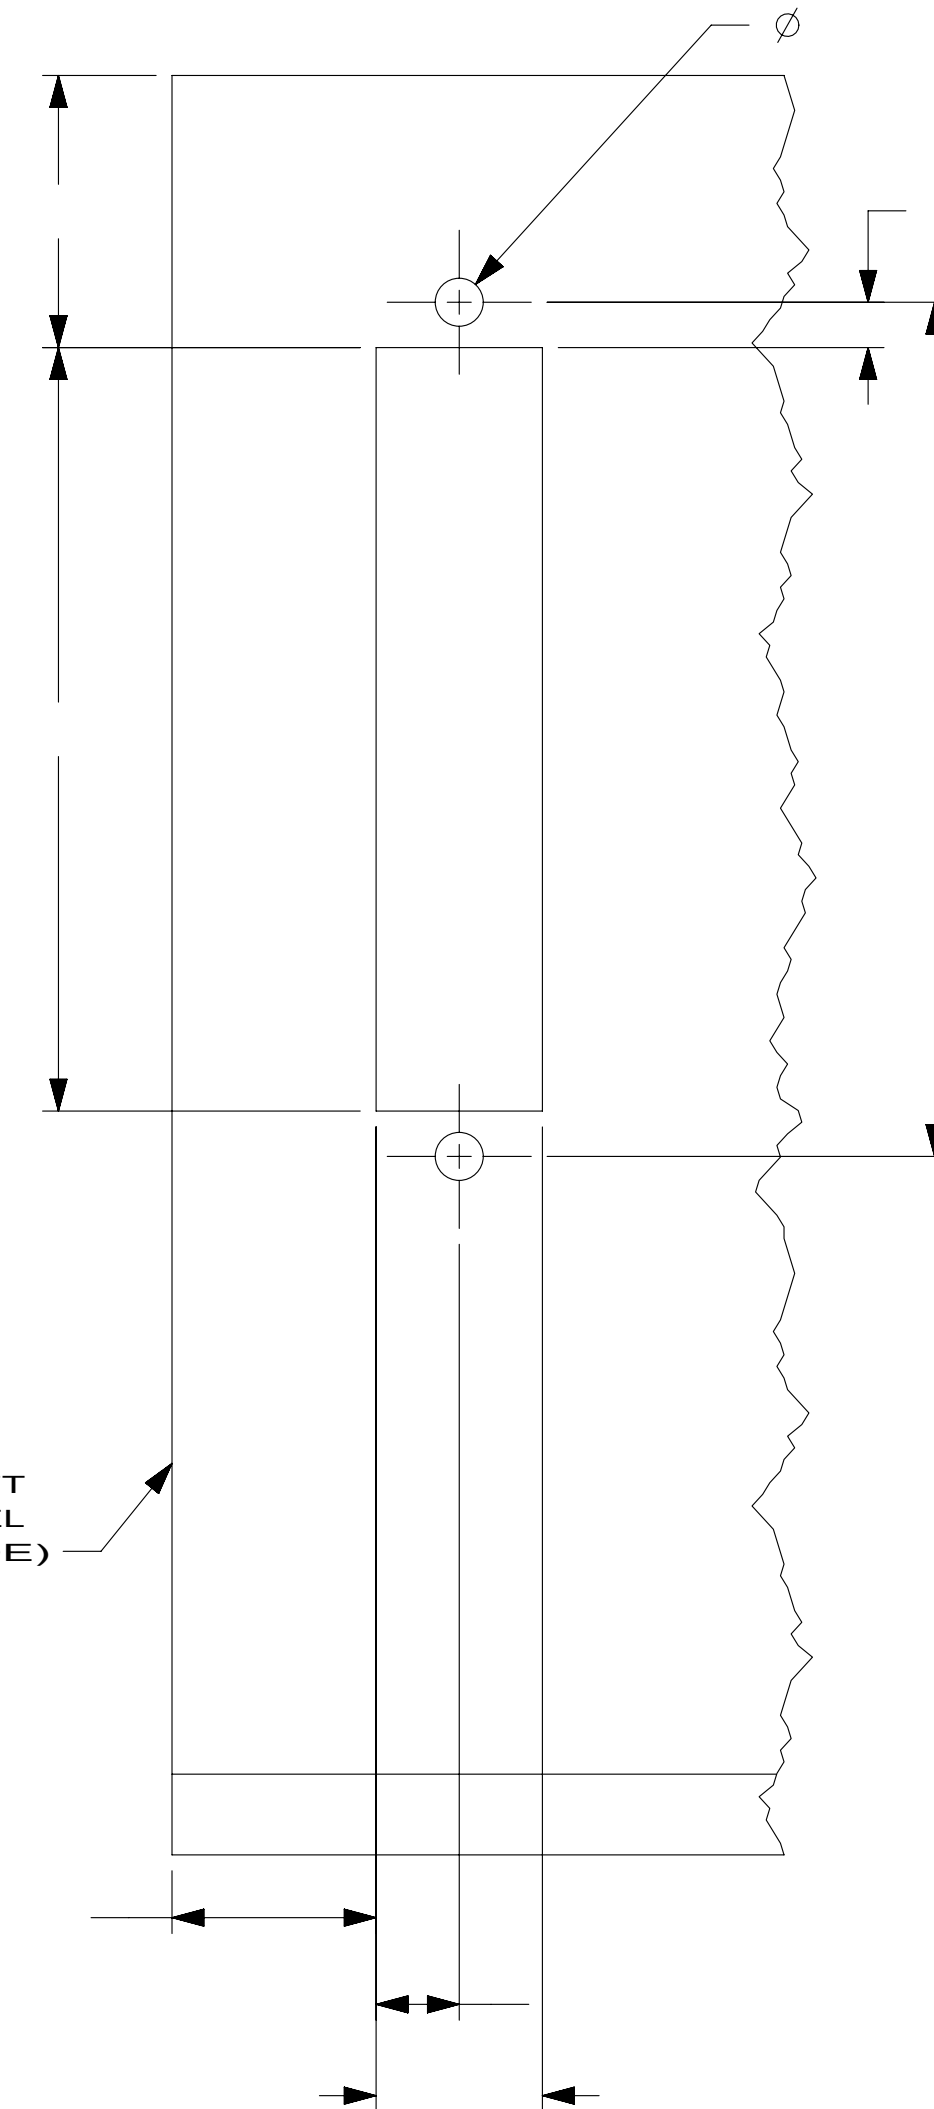

DETAIL CF 60M

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

16Y FORD CHASSIS 14,500 LB.GVWR
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265


FIRST USED 09 728B

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-CHASSIS

SHEET 3 PART NO. 164449 REV


NOTES:

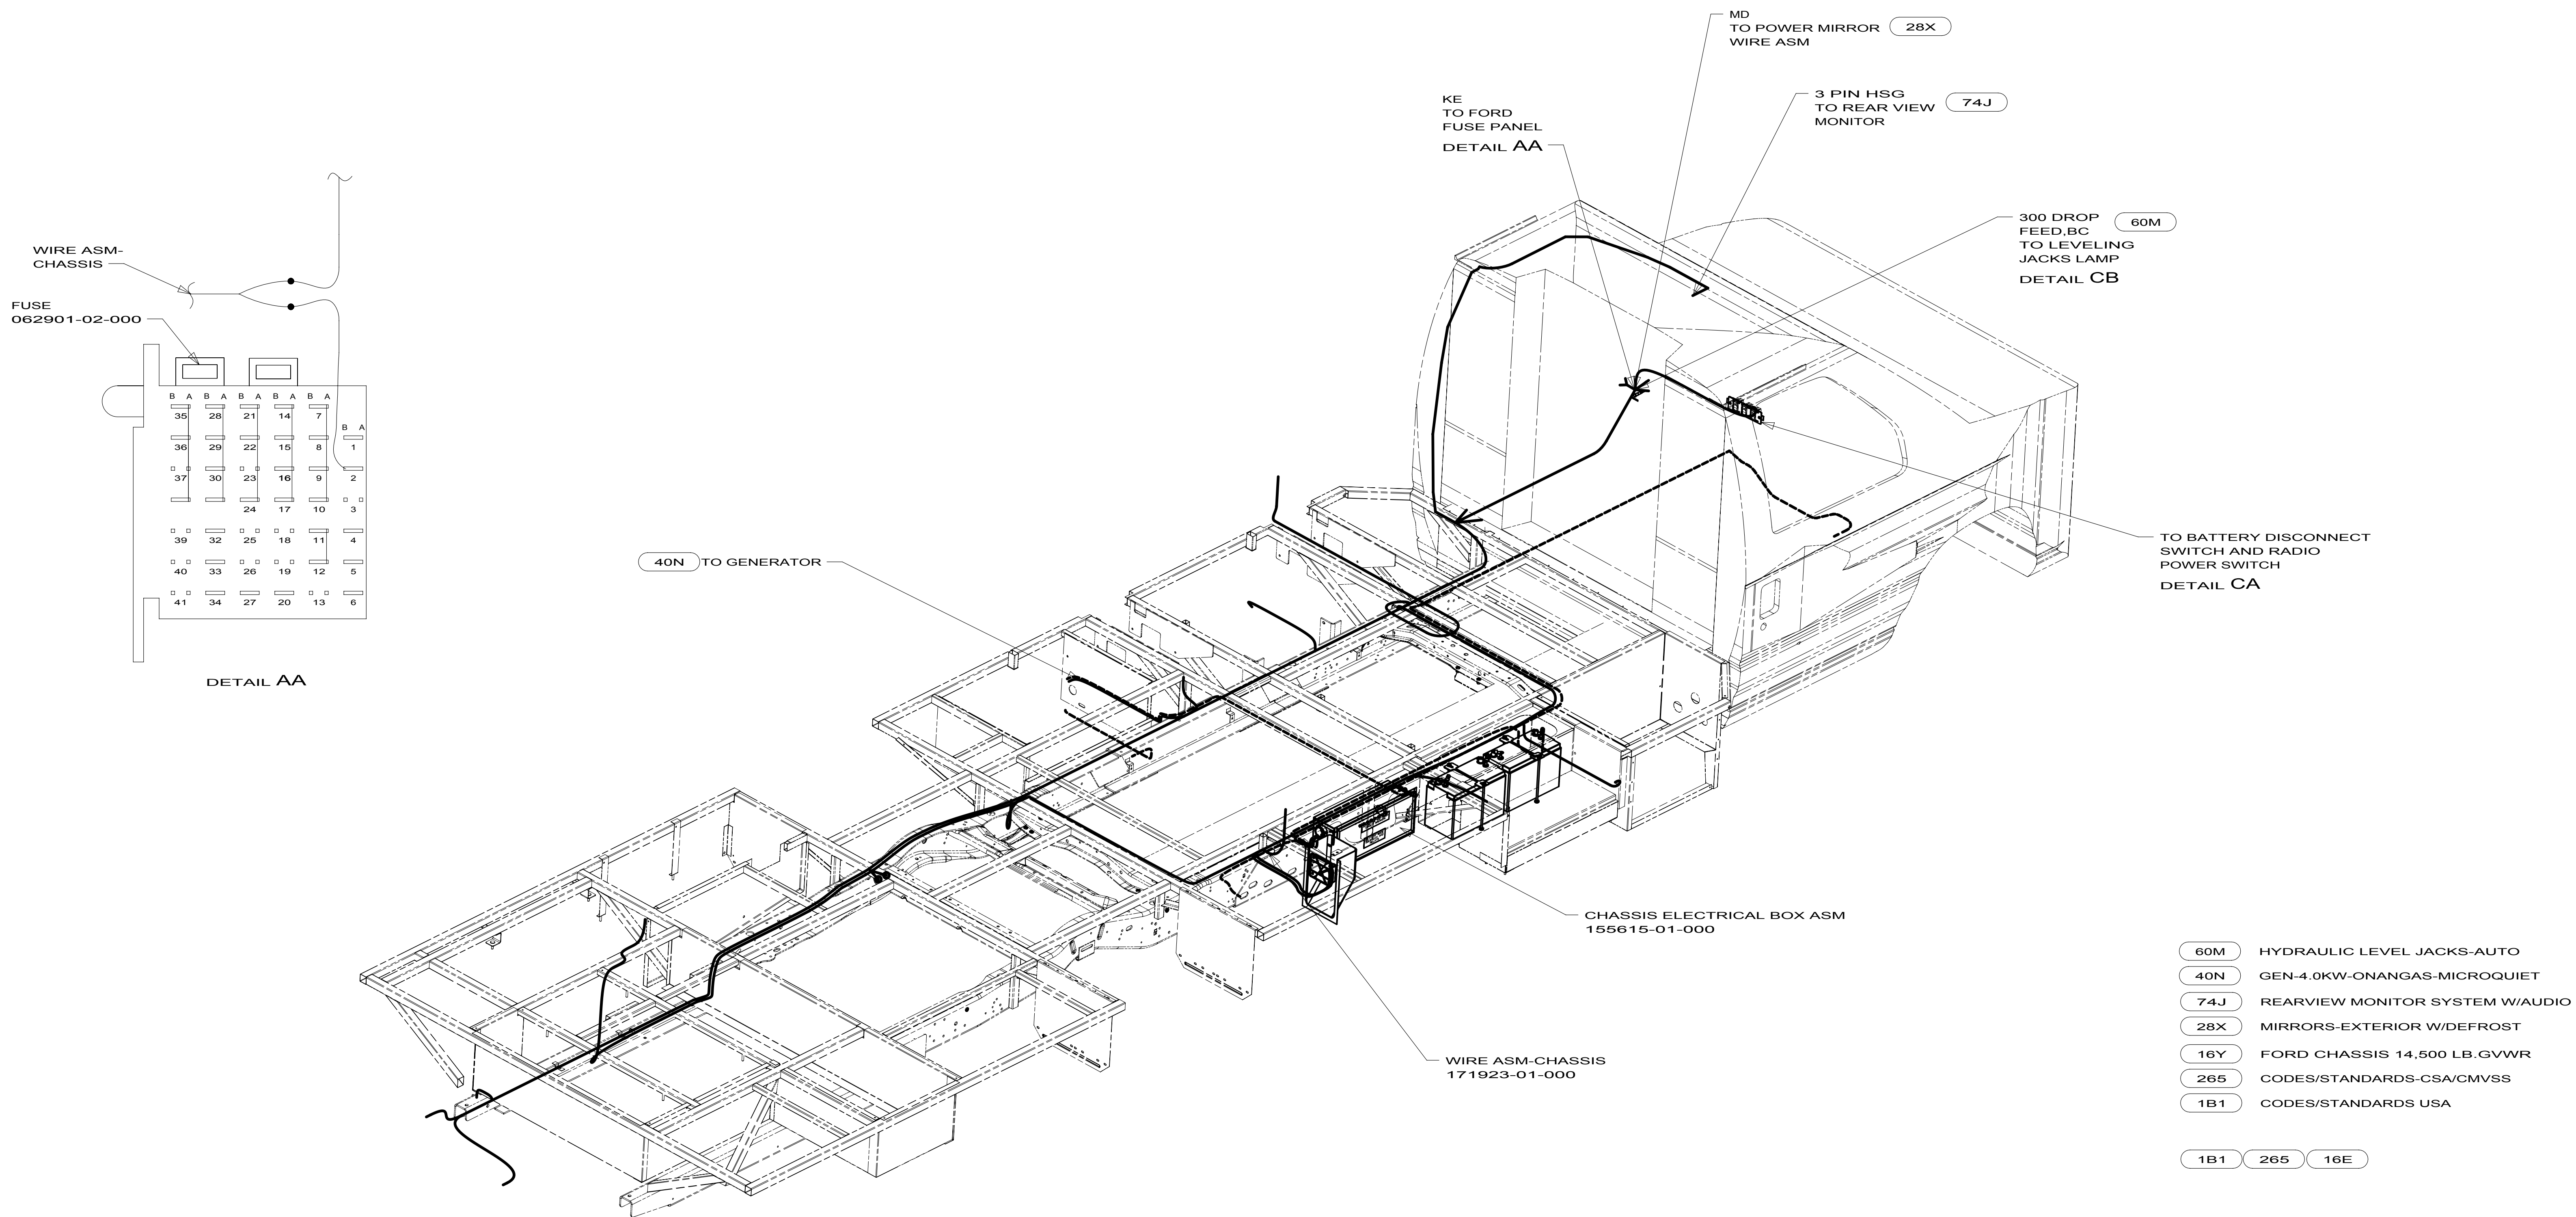

3. SECURE WIRE ASM AND CABLES WITH WIRE TIE 008343-01-000 OR 116673-01-000 AT NO MORE THAN 600MM CENTER ALONG ENTIRE ROUTED PATH.
2. SECURE CONDUIT 041953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
1. LEGEND: — WINNEBAGO; - - - - - CABLE; CHASSIS SUPPLIED WIRING.
- NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

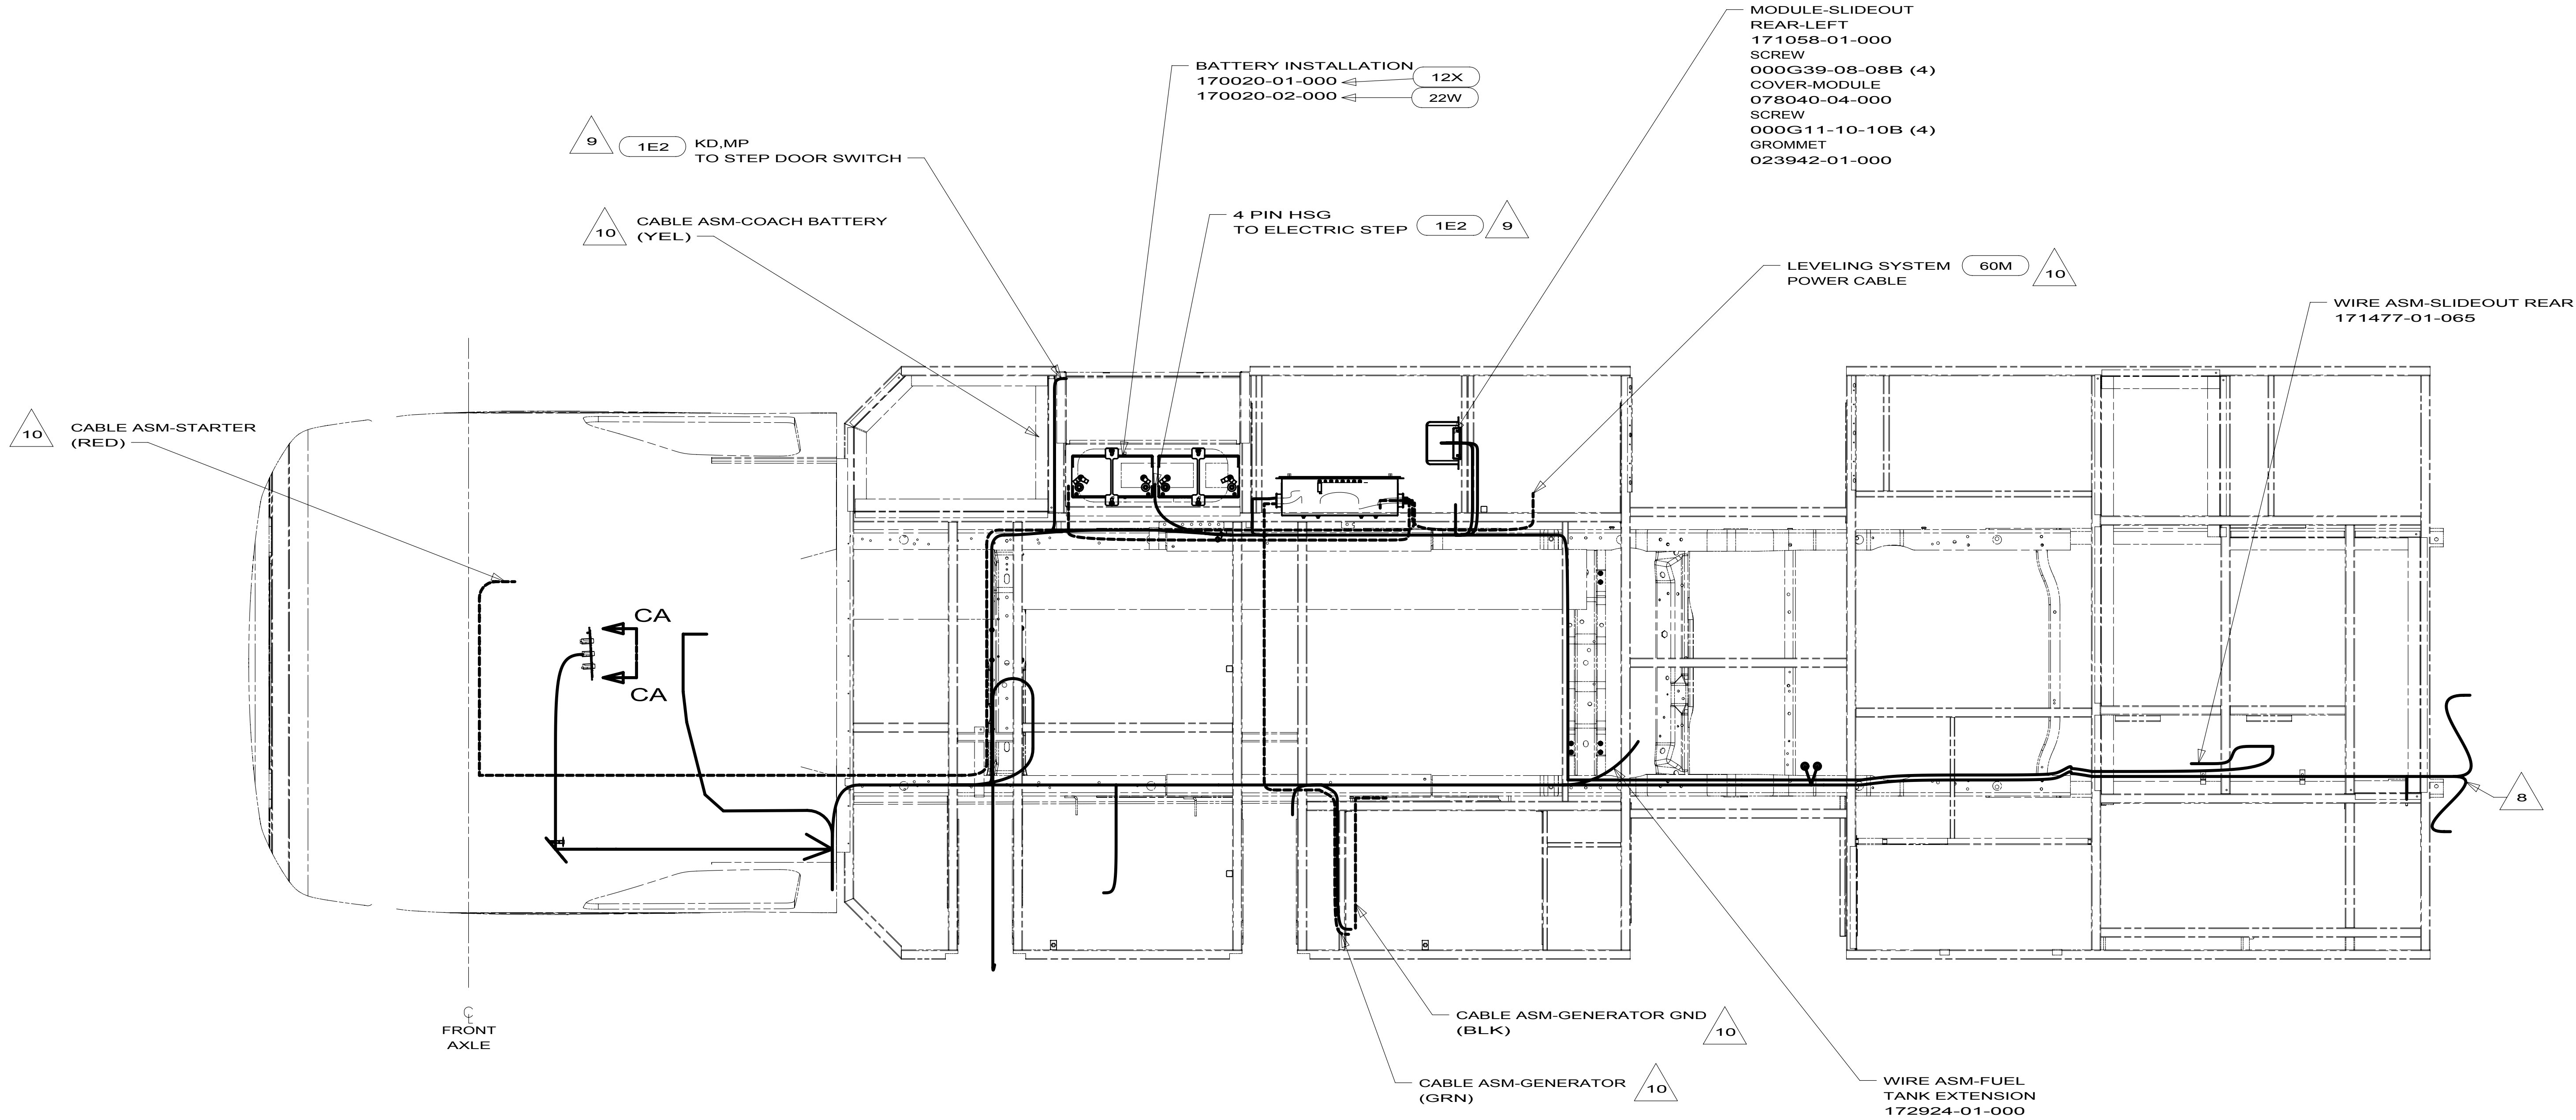

- 10 SEE BATTERY INSTALLATION FOR ADDITIONAL INFORMATION.
- 9 SECURE WIRE DROP BACK TO MAIN WIRE ASM WHEN NOT USED.
- 8 COIL UP EXCESS MONITOR CABLE HERE.

3. SECURE WIRE ASM AND CABLES WITH WIRE TIE 008343-01-000 OR 116673-01-000 AT NO MORE THAN 600MM CENTER ALONG ENTIRE ROUTED PATH.
2. SECURE CONDUIT 041953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.


1. LEGEND: — WINNEBAGO; - - - - - CABLE; - - - - - CHASSIS SUPPLIED WIRING.

- 60M HYDRAULIC LEVEL JACKS-AUTO
- 22W BATTERY-SECOND
- 12X BATTERY-ONE
- 1E2 ENTRANCE STEP-ELEC.
- 16Y FORD CHASSIS 14,500 LB.GVWR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


1B1 265 16Y

10 728B


WIRING INSTL-CHASSIS

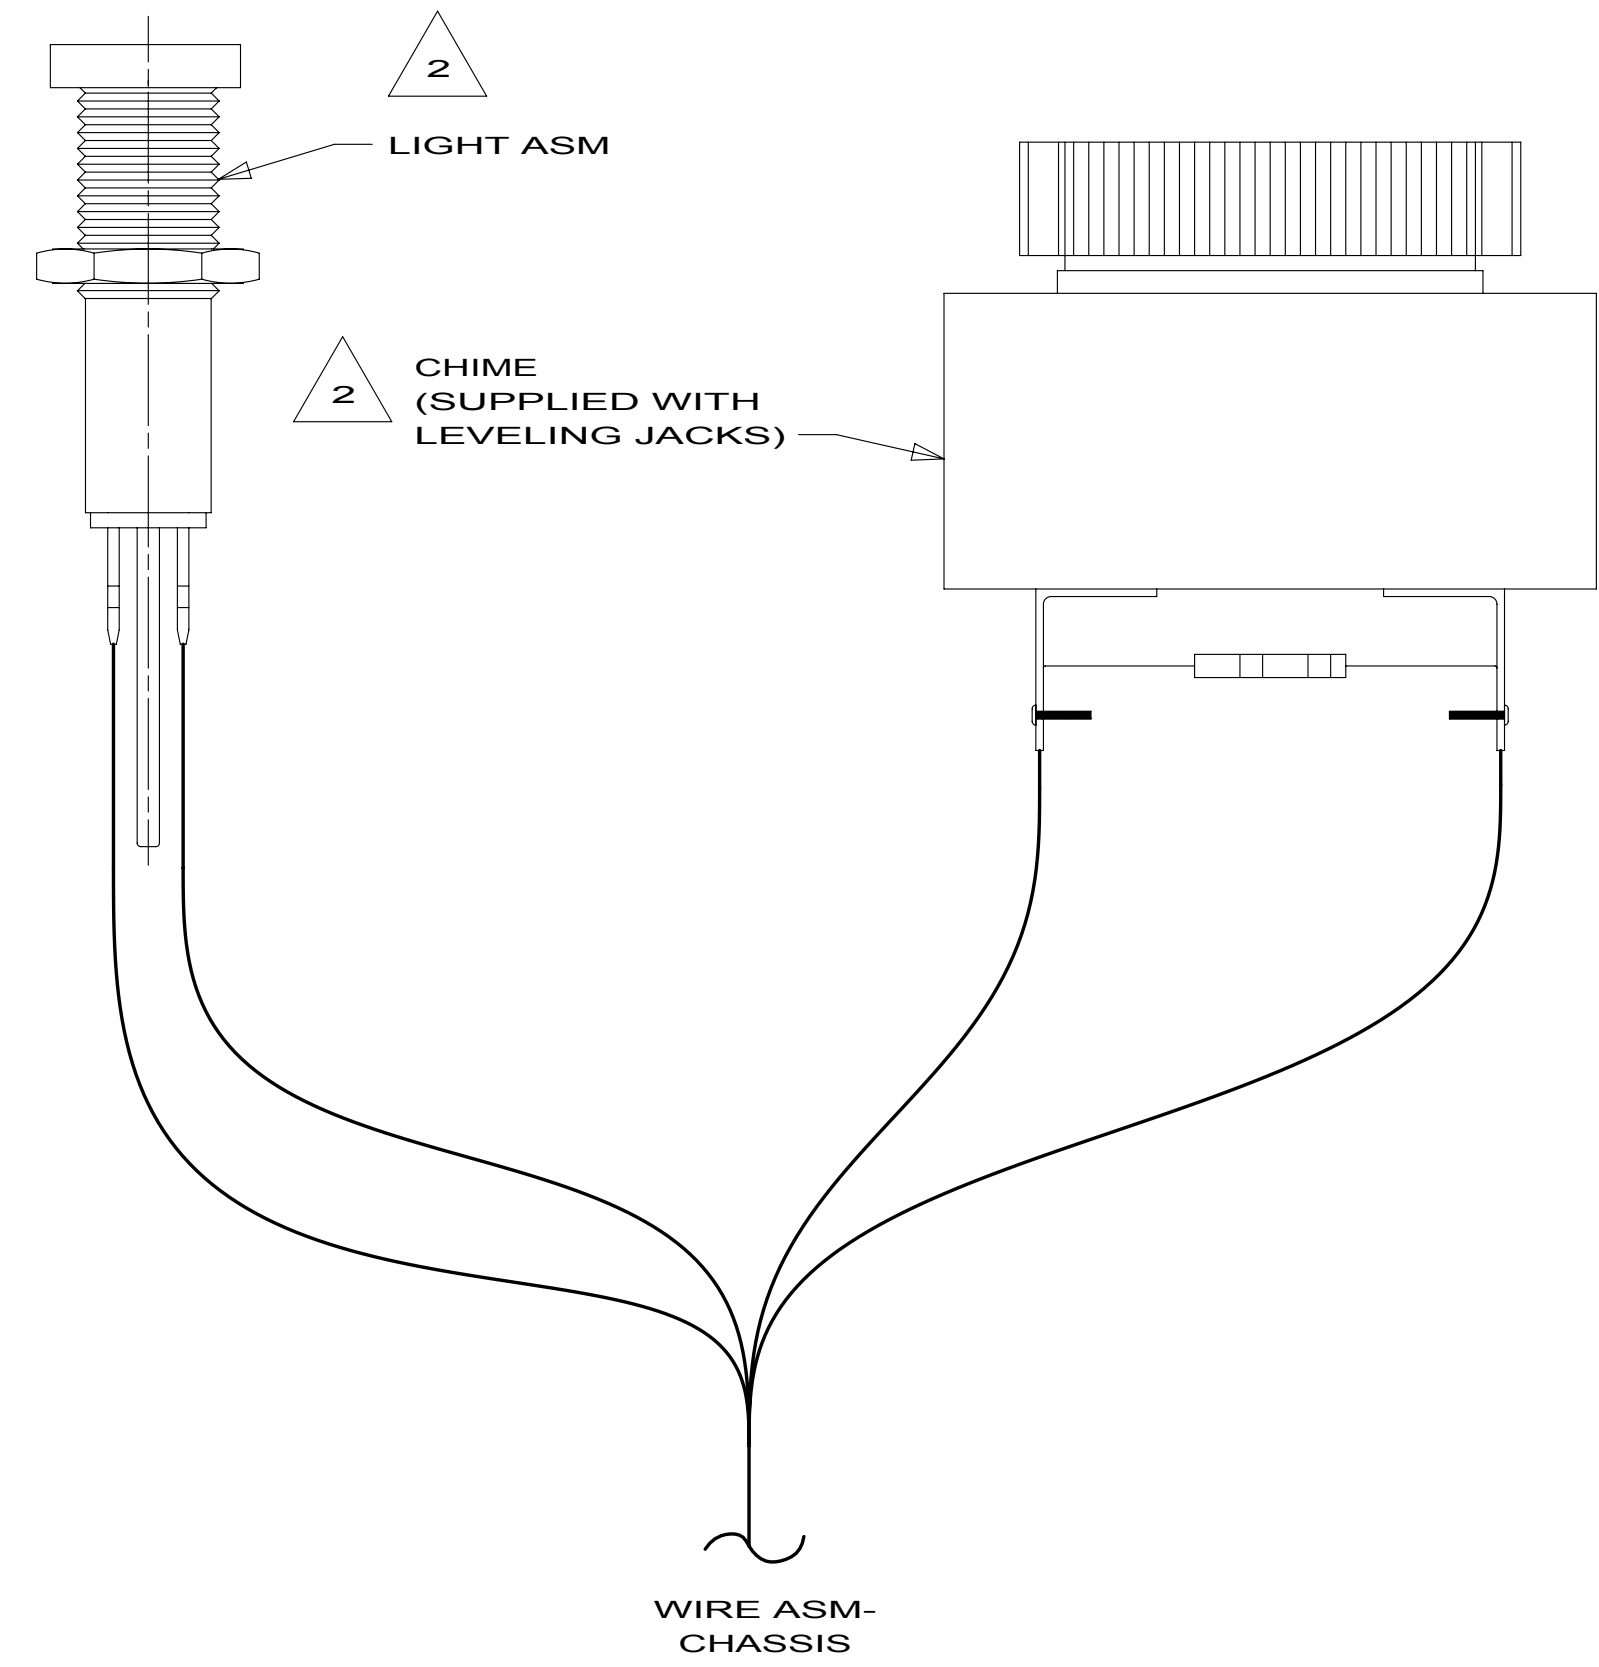

DETAIL CC 60M

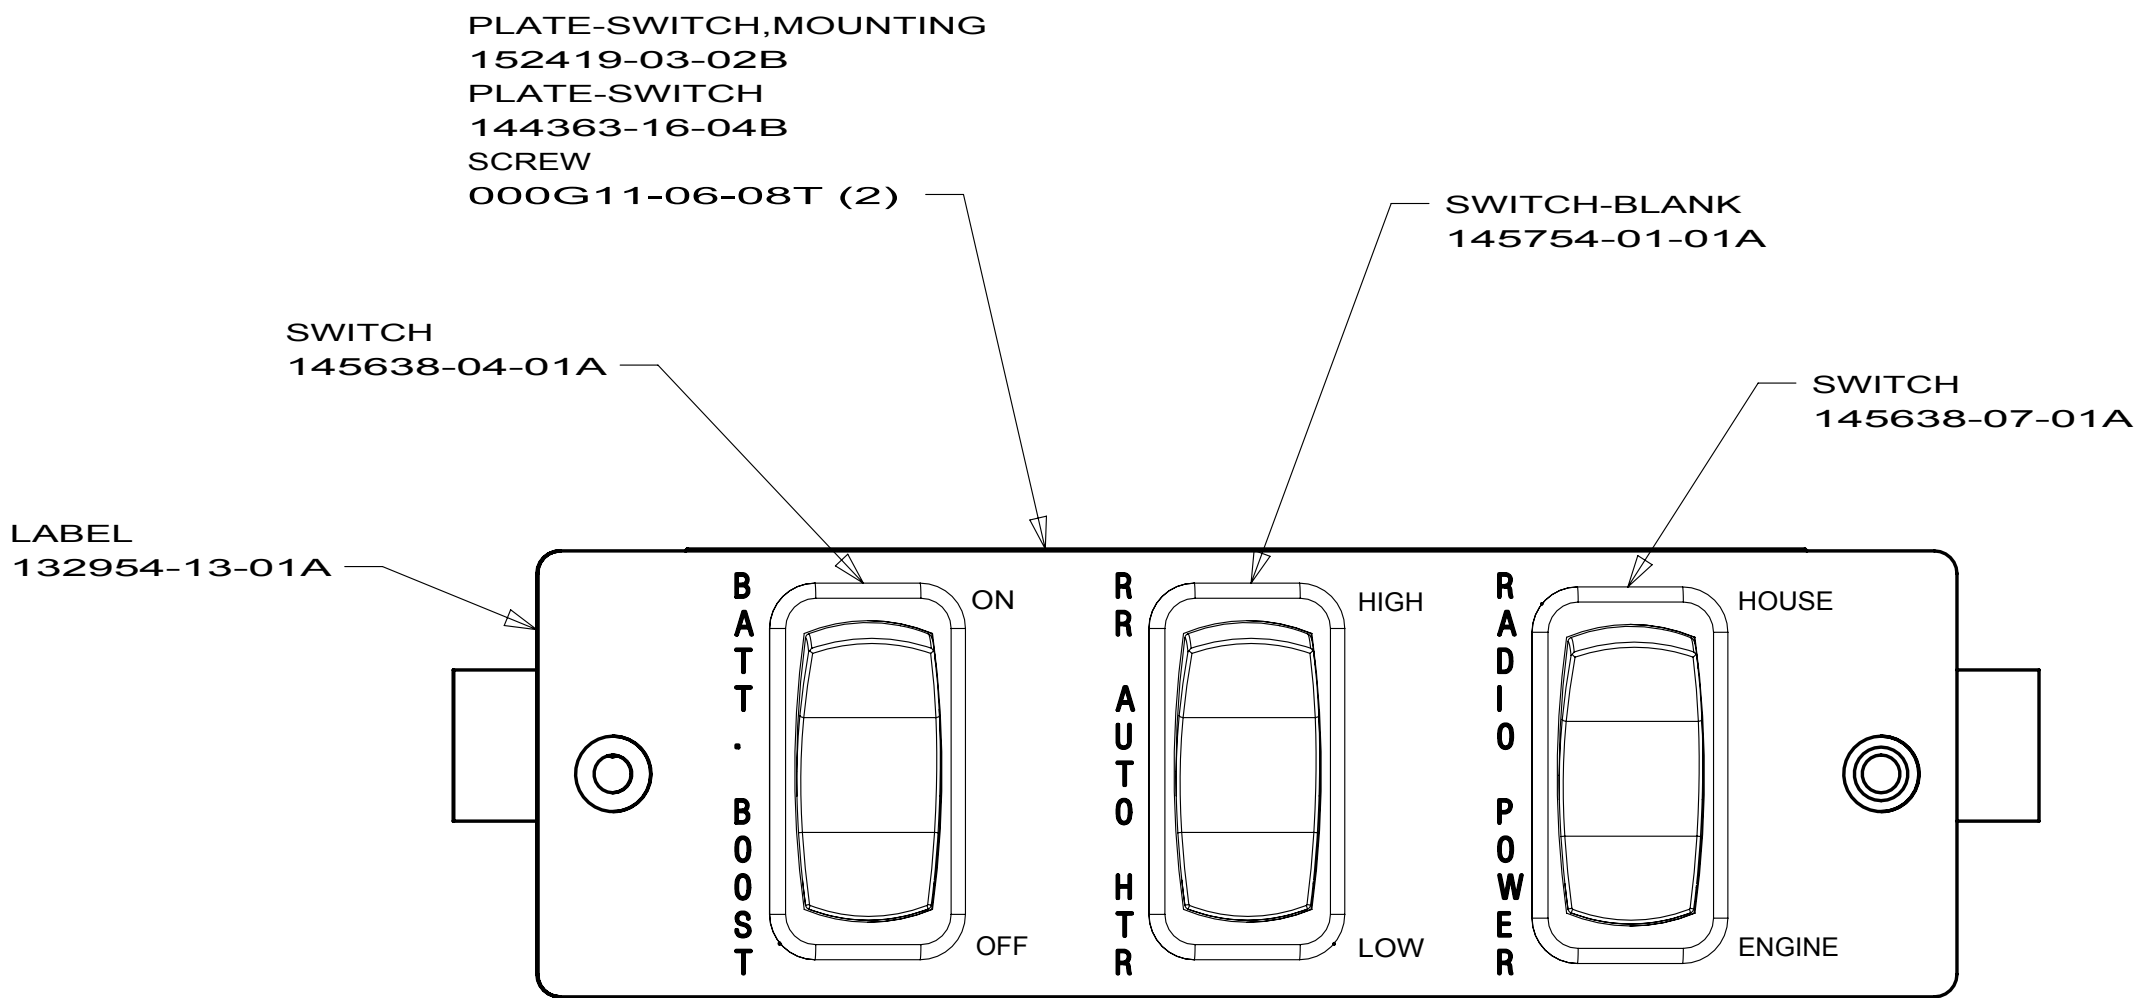

DETAIL CA

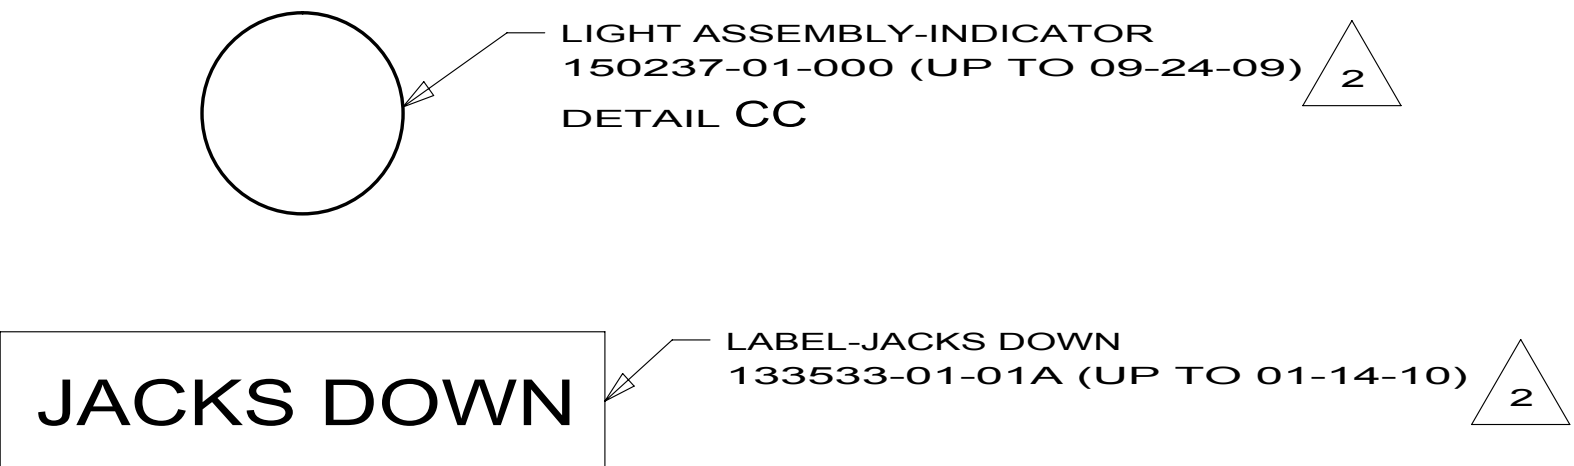

DETAIL CB 60M

2 SUPPLIED WITH LEVELING SYSTEM.


- 60M HYDRAULIC LEVEL JACKS-AUTO
- 16Y FORD CHASSIS 14,500 LB.GVWR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

10 728B

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

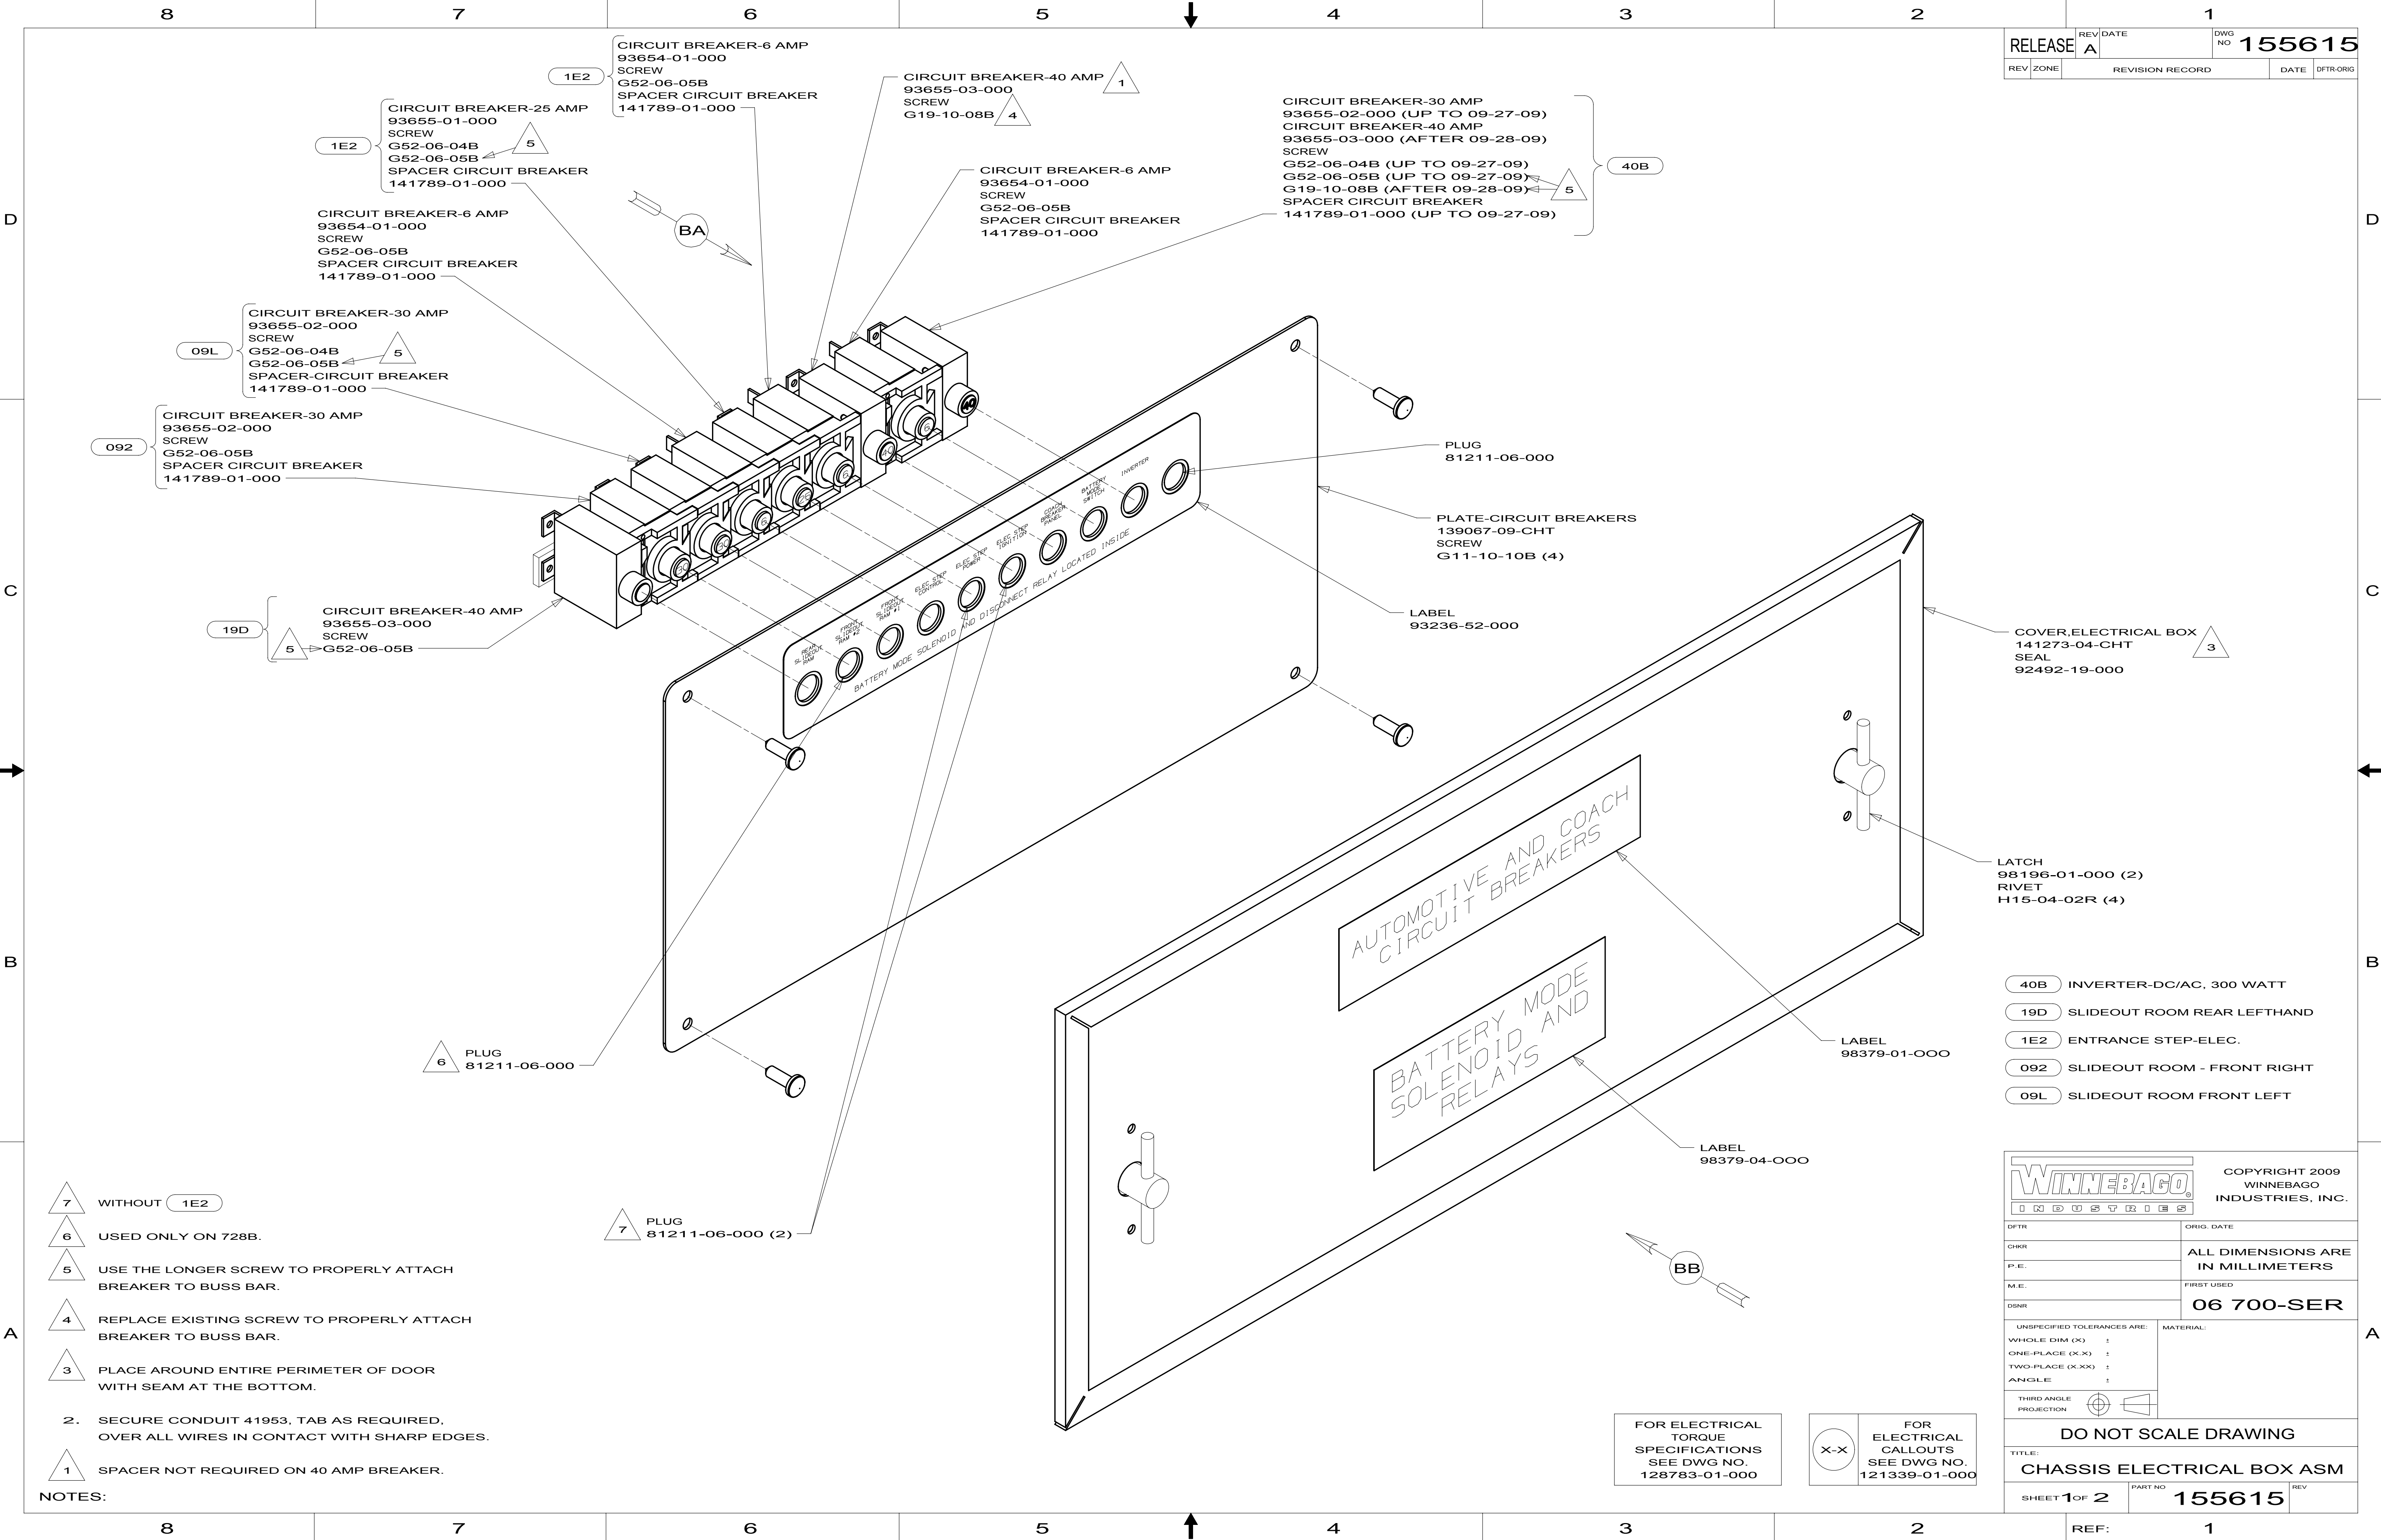

RELEASE		REV A	DATE		DWG NO	155615	
REV	ZONE	REVISION RECORD				DATE	DFTR-ORIG

- 40B INVERTER-DC/AC, 300 WATT
- 19D SLIDEOUT ROOM REAR LEFTHAND
- 1E2 ENTRANCE STEP-ELEC.
- 092 SLIDEOUT ROOM - FRONT RIGHT
- 09L SLIDEOUT ROOM FRONT LEFT

WINNEBAGO

INDUSTRIES

COPYRIGHT 2009

WINNEBAGO

INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHGR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	06 700-SER
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	:
ONE-PLACE (X.X)	:
TWO-PLACE (X.XX)	:
ANGLE	:
THIRD ANGLE PROJECTION	

DO NOT SCALE DRAWING

TITLE:		CHASSIS ELECTRICAL BOX ASM	
SHEET 1 OF 2	PART NO	155615	REV


REF: 1

- 7 WITHOUT 1E2
 - 6 USED ONLY ON 728B.
 - 5 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
 - 4 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
 - 3 PLACE AROUND ENTIRE PERIMETER OF DOOR WITH SEAM AT THE BOTTOM.
2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
- 1 SPACER NOT REQUIRED ON 40 AMP BREAKER.


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

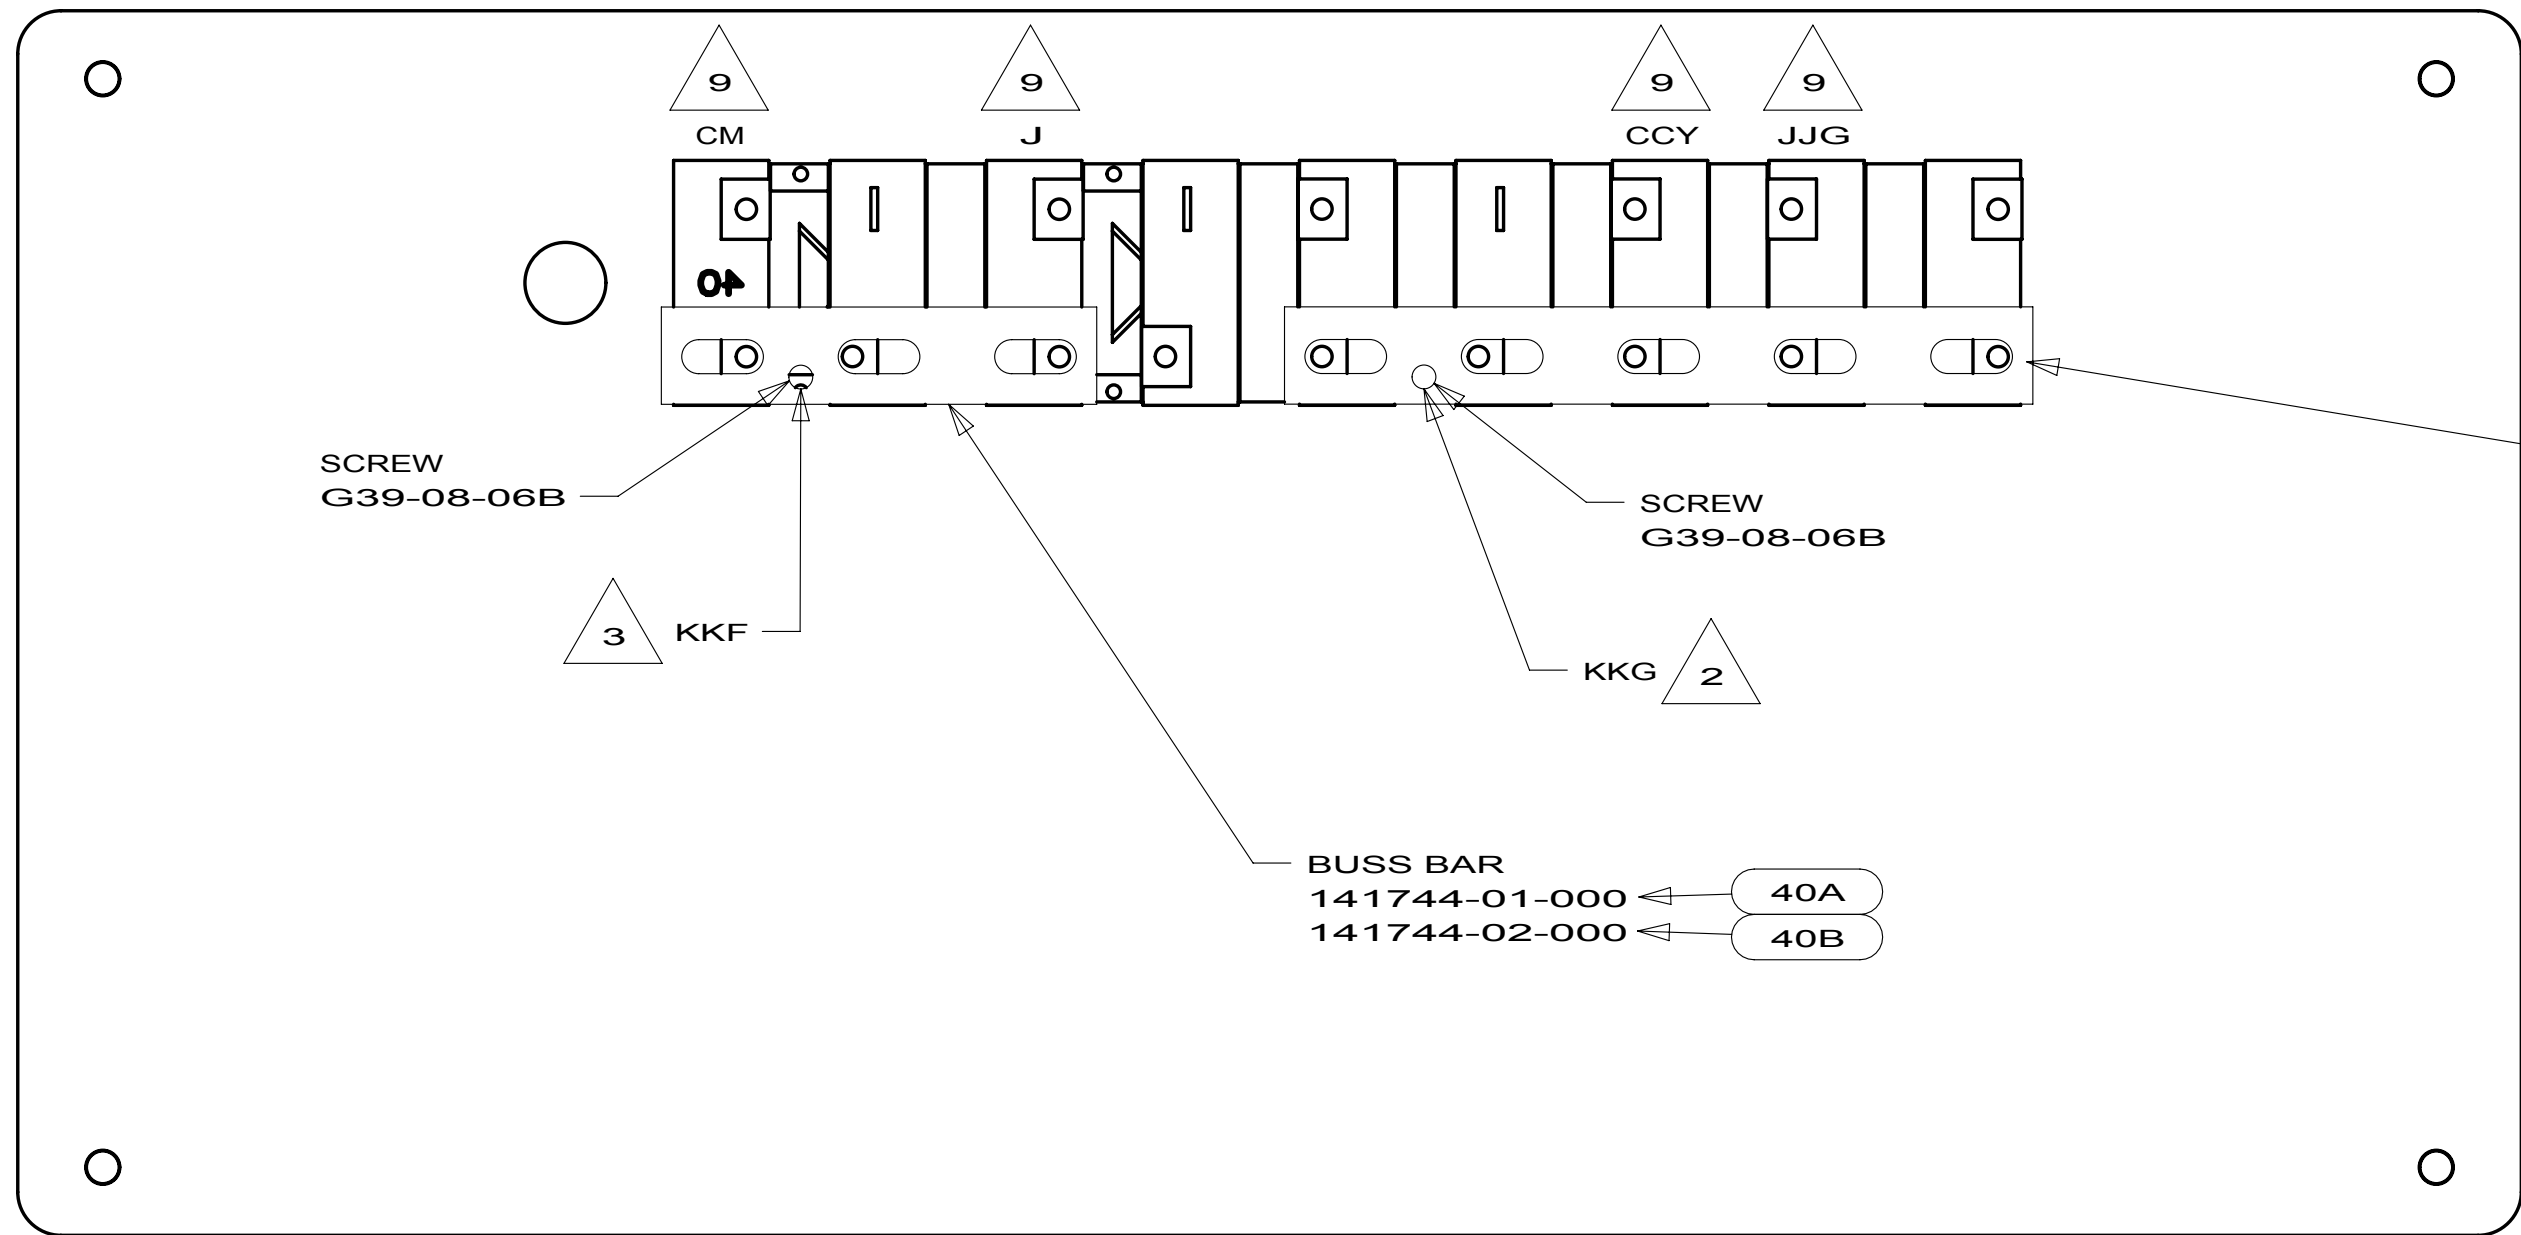

VIEW BA 4

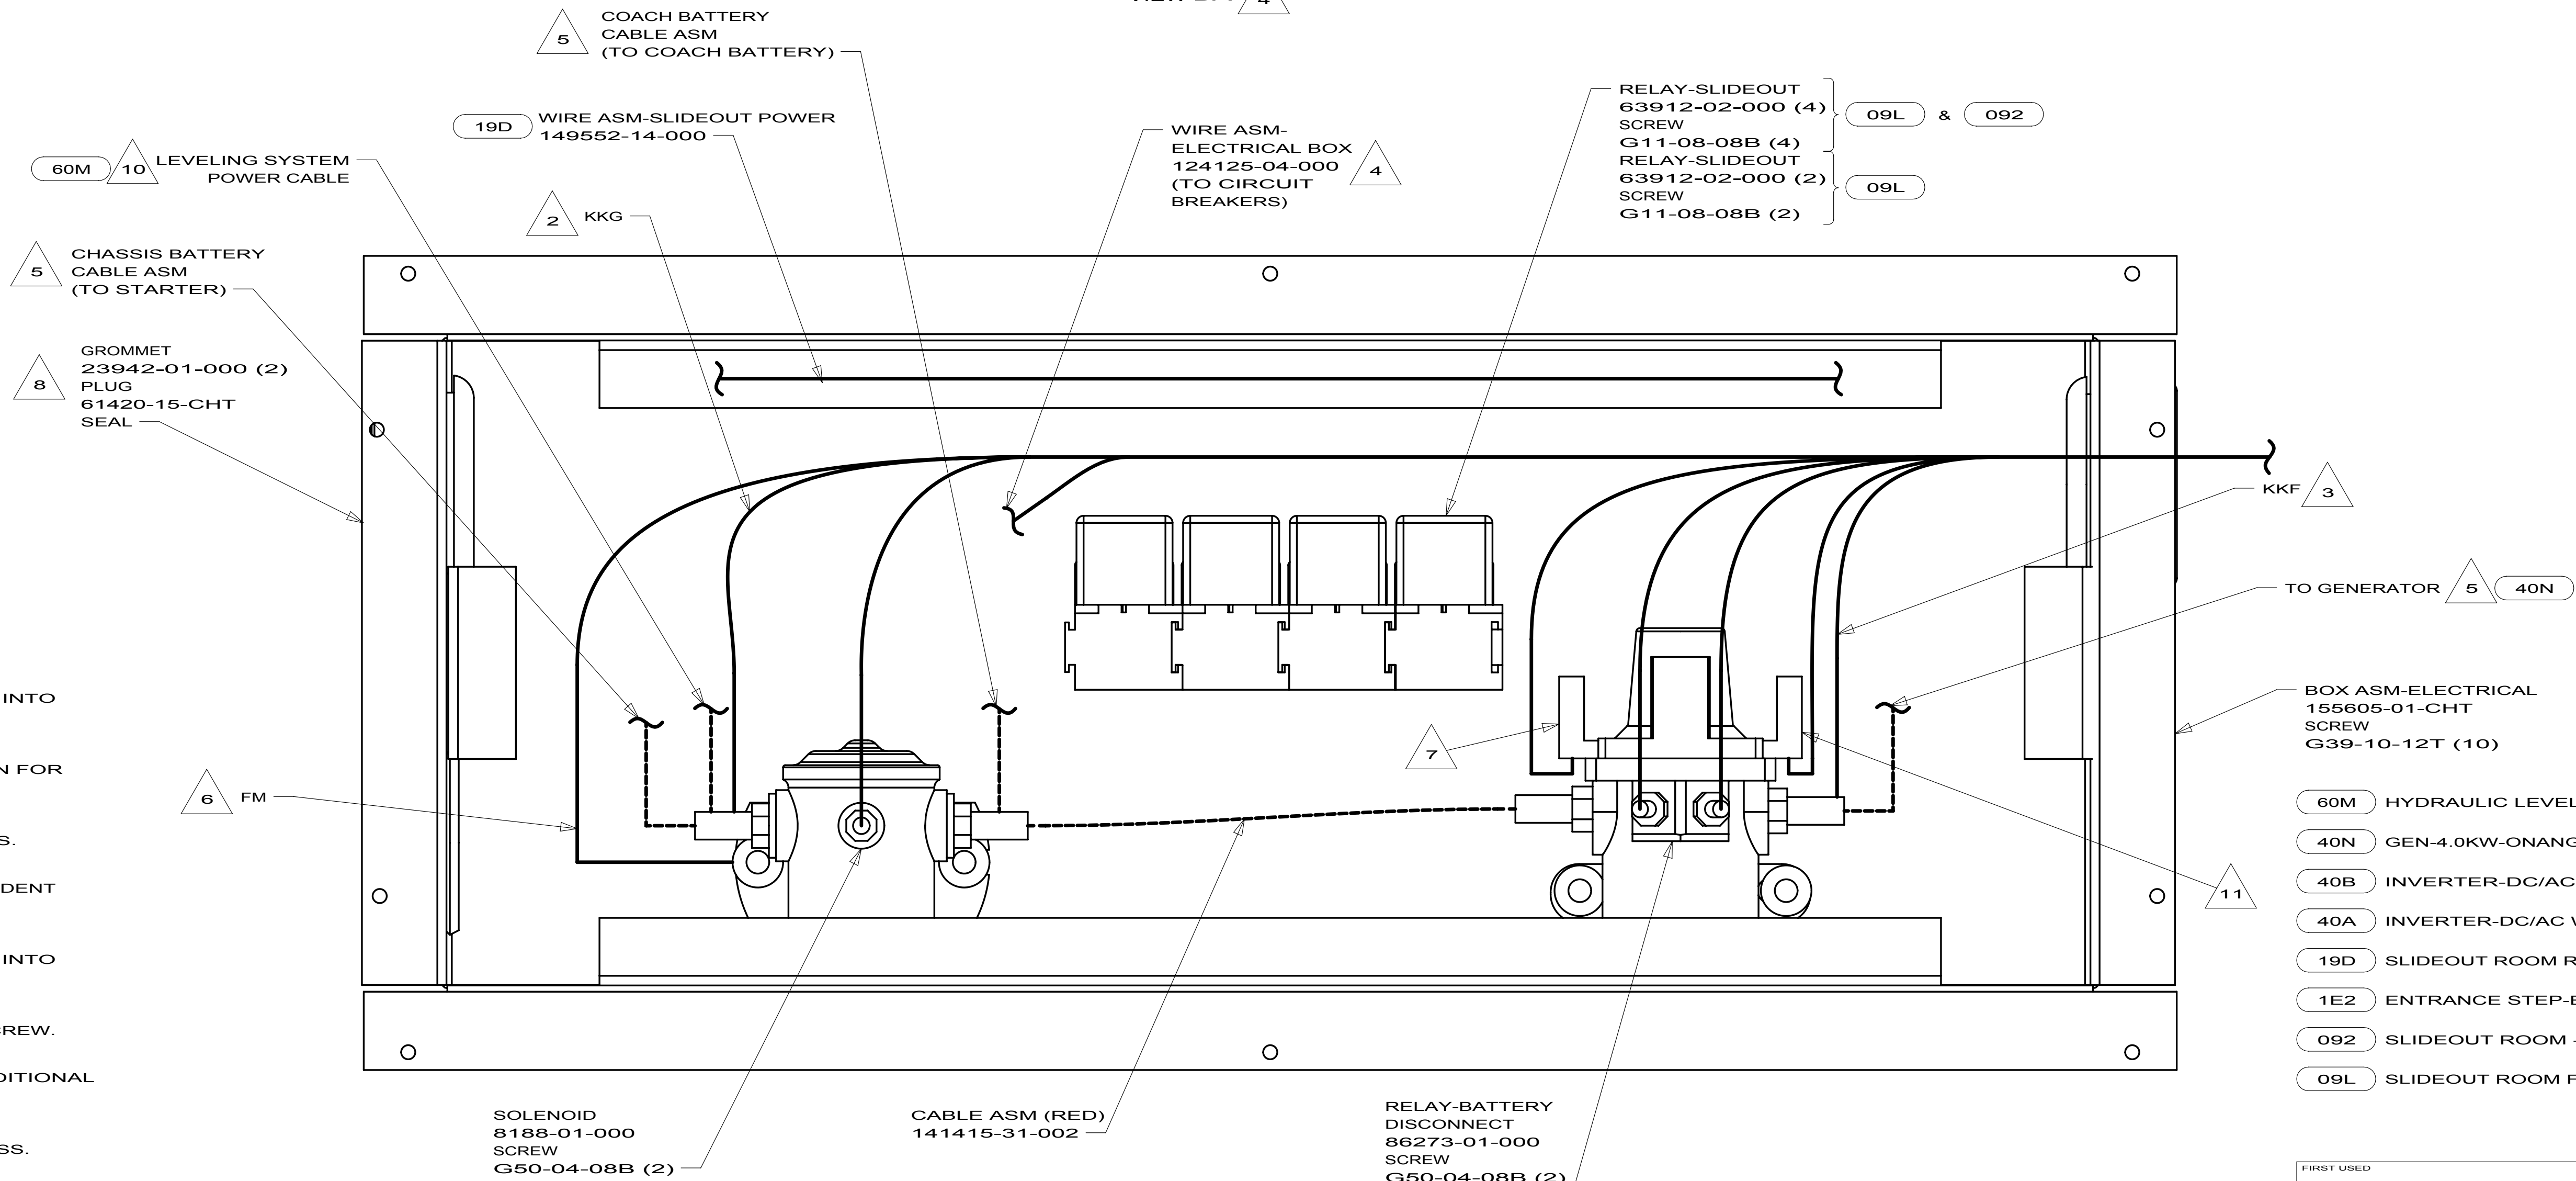

VIEW BB 4

- 12 USED ON ALL 2009 700-SERIES.
- 11 INSERT TERMINAL FROM CIRCUIT LK INTO FUSE HOLDER SOCKET ON RELAY.
- 10 SEE LEVELING SYSTEM INSTALLATION FOR ADDITIONAL INFORMATION
- 9 CIRCUIT IS FROM WIRE ASM-CHASSIS.
- 8 LOCATION OF GROMMET & PLUG DEPENDENT ON LOCATION OF BOX.
- 7 INSERT TERMINAL FROM CIRCUIT LJ INTO FUSE HOLDER SOCKET ON RELAY.
- 6 SECURE WITH SOLENOID MOUNTING SCREW.
- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 TAPE BACK UNUSED WIRES TO HARNESS.
- 3 WIRE IS MARKED WITH YELLOW TAPE.
- 2 WIRE IS MARKED WITH PURPLE TAPE.

- 60M HYDRAULIC LEVEL JACKS-AUTO
- 40N GEN-4.0KW-ONANGAS-MICROQUIET
- 40B INVERTER-DC/AC, 300 WATT
- 40A INVERTER-DC/AC WITHOUT
- 19D SLIDEOUT ROOM REAR LEFTHAND
- 1E2 ENTRANCE STEP-ELEC.
- 092 SLIDEOUT ROOM - FRONT RIGHT
- 09L SLIDEOUT ROOM FRONT LEFT

NOTES:
1. LEGEND: — WINNEBAGO CABLE: — CHASSIS SUPPLIED WIRING.


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


FIRST USED		
06 700-SER		
DO NOT SCALE DRAWING		
TITLE: CHASSIS ELECTRICAL BOX ASM		
SHEET 2	PART NO 155615	REV

8			7			6			5			4			3			2			1		
DRAWING NO.		FEATURES		SHEETS																			
165490-01		12X		1,2																			
165490-02		22W		1,3																			
				222B		224V		229T		231C		231J		231N									
CABLE ASM-STARTER (RED)		16B 16C 16Y		141415-34-056		141415-34-048		141415-34-056		141415-34-053		141415-34-052		141415-34-068									
		1PY		-----		141415-34-025		141415-34-029		141415-34-036		-----		-----									
CABLE ASM-COACH BATTERY (YEL)		16B 16C 16Y		141415-52-016		141415-52-012		141415-52-021		141415-52-016		141415-52-018		141415-52-024									
		1PY		-----		141415-52-012		141415-52-021		141415-52-016		-----		-----									
CABLE ASM-COACH BATTERY GND (BLK)		16B 16C 16Y		133566-12-008		133566-12-008		133566-12-009		133566-12-008		133566-12-008		133566-12-008									
		1PY		-----		133566-12-008		133566-12-009		133566-12-008		-----		-----									
CABLE ASM-GENERATOR (GRN)		16B 16C 16Y		141415-42-032		141415-42-032		141415-42-064		141415-42-068		141415-42-028		141415-42-050		1							
		1PY		-----		141415-42-032		141415-42-064		141415-42-068		-----		-----		1							
CABLE ASM-GENERATOR GND (BLK)		16B 16C 16Y		133566-11-008		133566-11-008		133566-11-008		133566-11-008		133566-11-008		133566-11-008		1							
		1PY		-----		133566-11-008		133566-11-008		133566-11-008		-----		-----		1							
				329B		330D		331C															
CABLE ASM-STARTER (RED)		16Y		141415-34-056		141415-34-050		141415-34-049															
		1PY		141415-34-029		-----		141415-34-032															
CABLE ASM-COACH BATTERY (YEL)		16Y		141415-52-021		141415-52-017		141415-52-016															
		1PY		141415-52-021		-----		141415-52-016															
CABLE ASM-COACH BATTERY GND (BLK)		16Y		133566-12-007		133566-12-008		133566-12-006															
		1PY		133566-12-007		-----		133566-12-006															
CABLE ASM-GENERATOR (GRN)		16Y		141415-42-044		141415-42-077		141415-42-068		1													
		1PY		141415-42-044		-----		141415-42-068		1													
CABLE ASM-GENERATOR GND (BLK)		16Y		133566-11-008		133566-11-008		133566-11-008		1													
		1PY		133566-11-008		-----		133566-11-008		1													
LEVELING SYSTEM POWER CABLE (BLU)		60M		141415-22-045		141415-22-022		141415-22-025		2													
				728B		730C																	
CABLE ASM-STARTER (RED)		16Y		141415-34-057		141415-34-053																	
CABLE ASM-COACH BATTERY (YEL)		16Y		141415-52-020		141415-52-020																	
CABLE ASM-COACH BATTERY GND (BLK)		16Y		133566-12-008		133566-12-008																	
CABLE ASM-GENERATOR (GRN)		16Y		141415-42-024		141415-42-075		1															
CABLE ASM-GENERATOR GND (BLK)		16Y		133566-11-008		133566-11-008		1															
LEVELING SYSTEM POWER CABLE (BLU)		60M		141415-22-010		141415-22-011		2															
2		SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.																					
1		ROUTING OF CABLES SHOWN ON WIRING INSTL-CHASSIS ONLY.																					
NOTES:																							
8			7			6			5			4			3			2			1		

RELEASE		REV	DATE		DWG NO		1	
A						165490		
REV	ZONE	REVISION RECORD				DATE	DFTR.ORG	

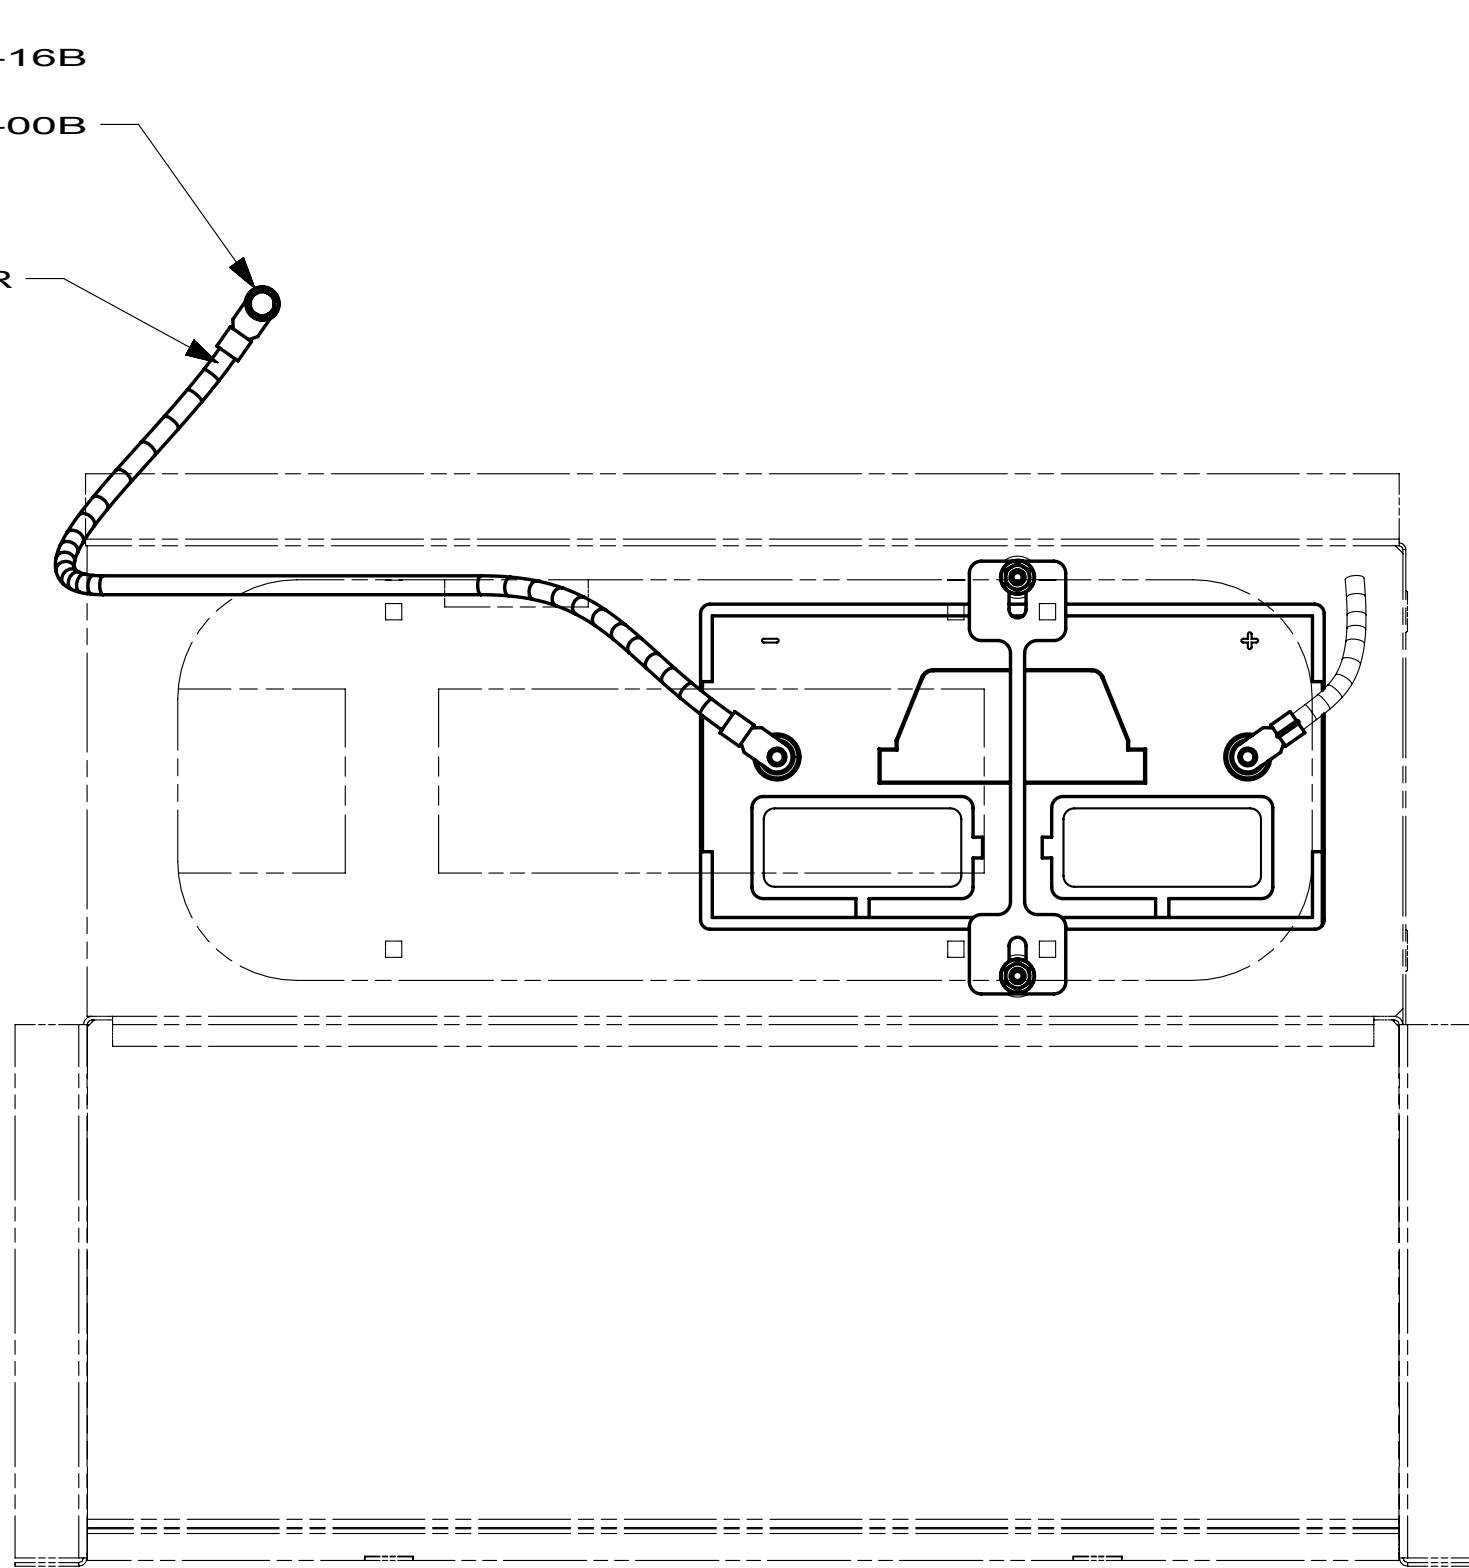

VIEW BA

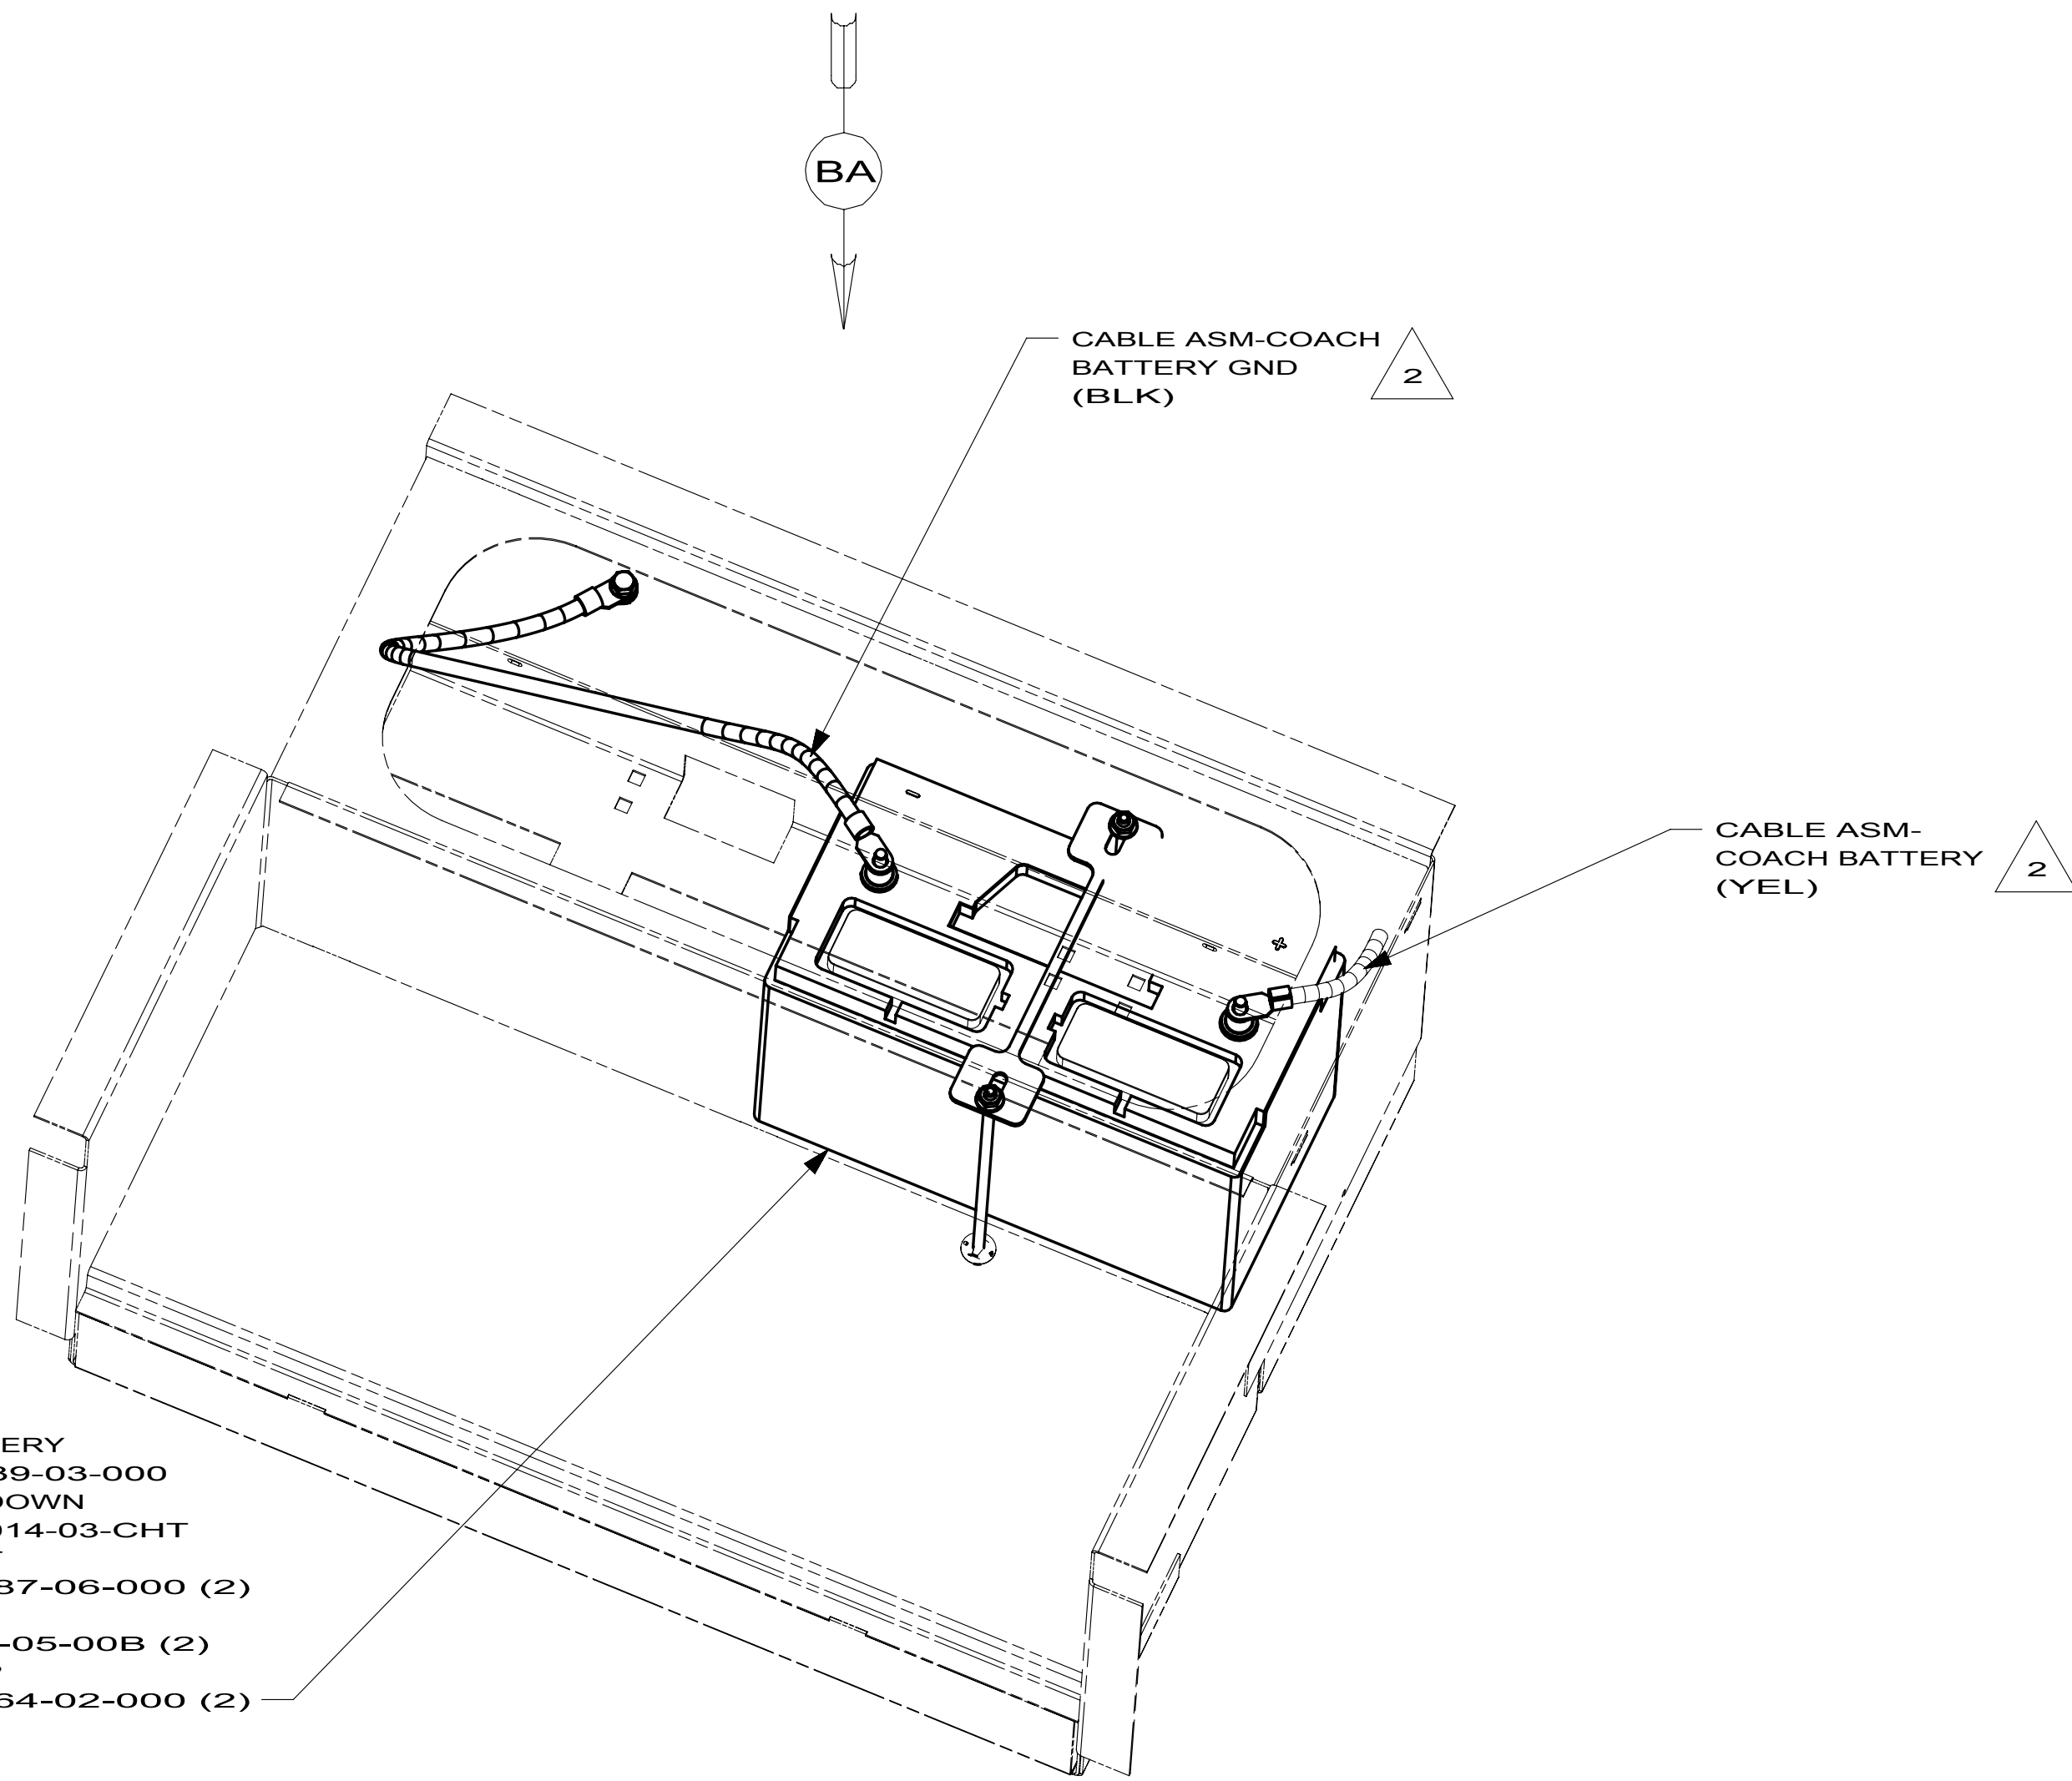

BATTERY BOX

2 BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

12X BATTERY-ONE

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA



1B1 265 12X

FIRST USED 09 200/300/700 SER


DO NOT SCALE DRAWING

TITLE: BATTERY INSTL

SHEET 2 PART NO 165490 REV

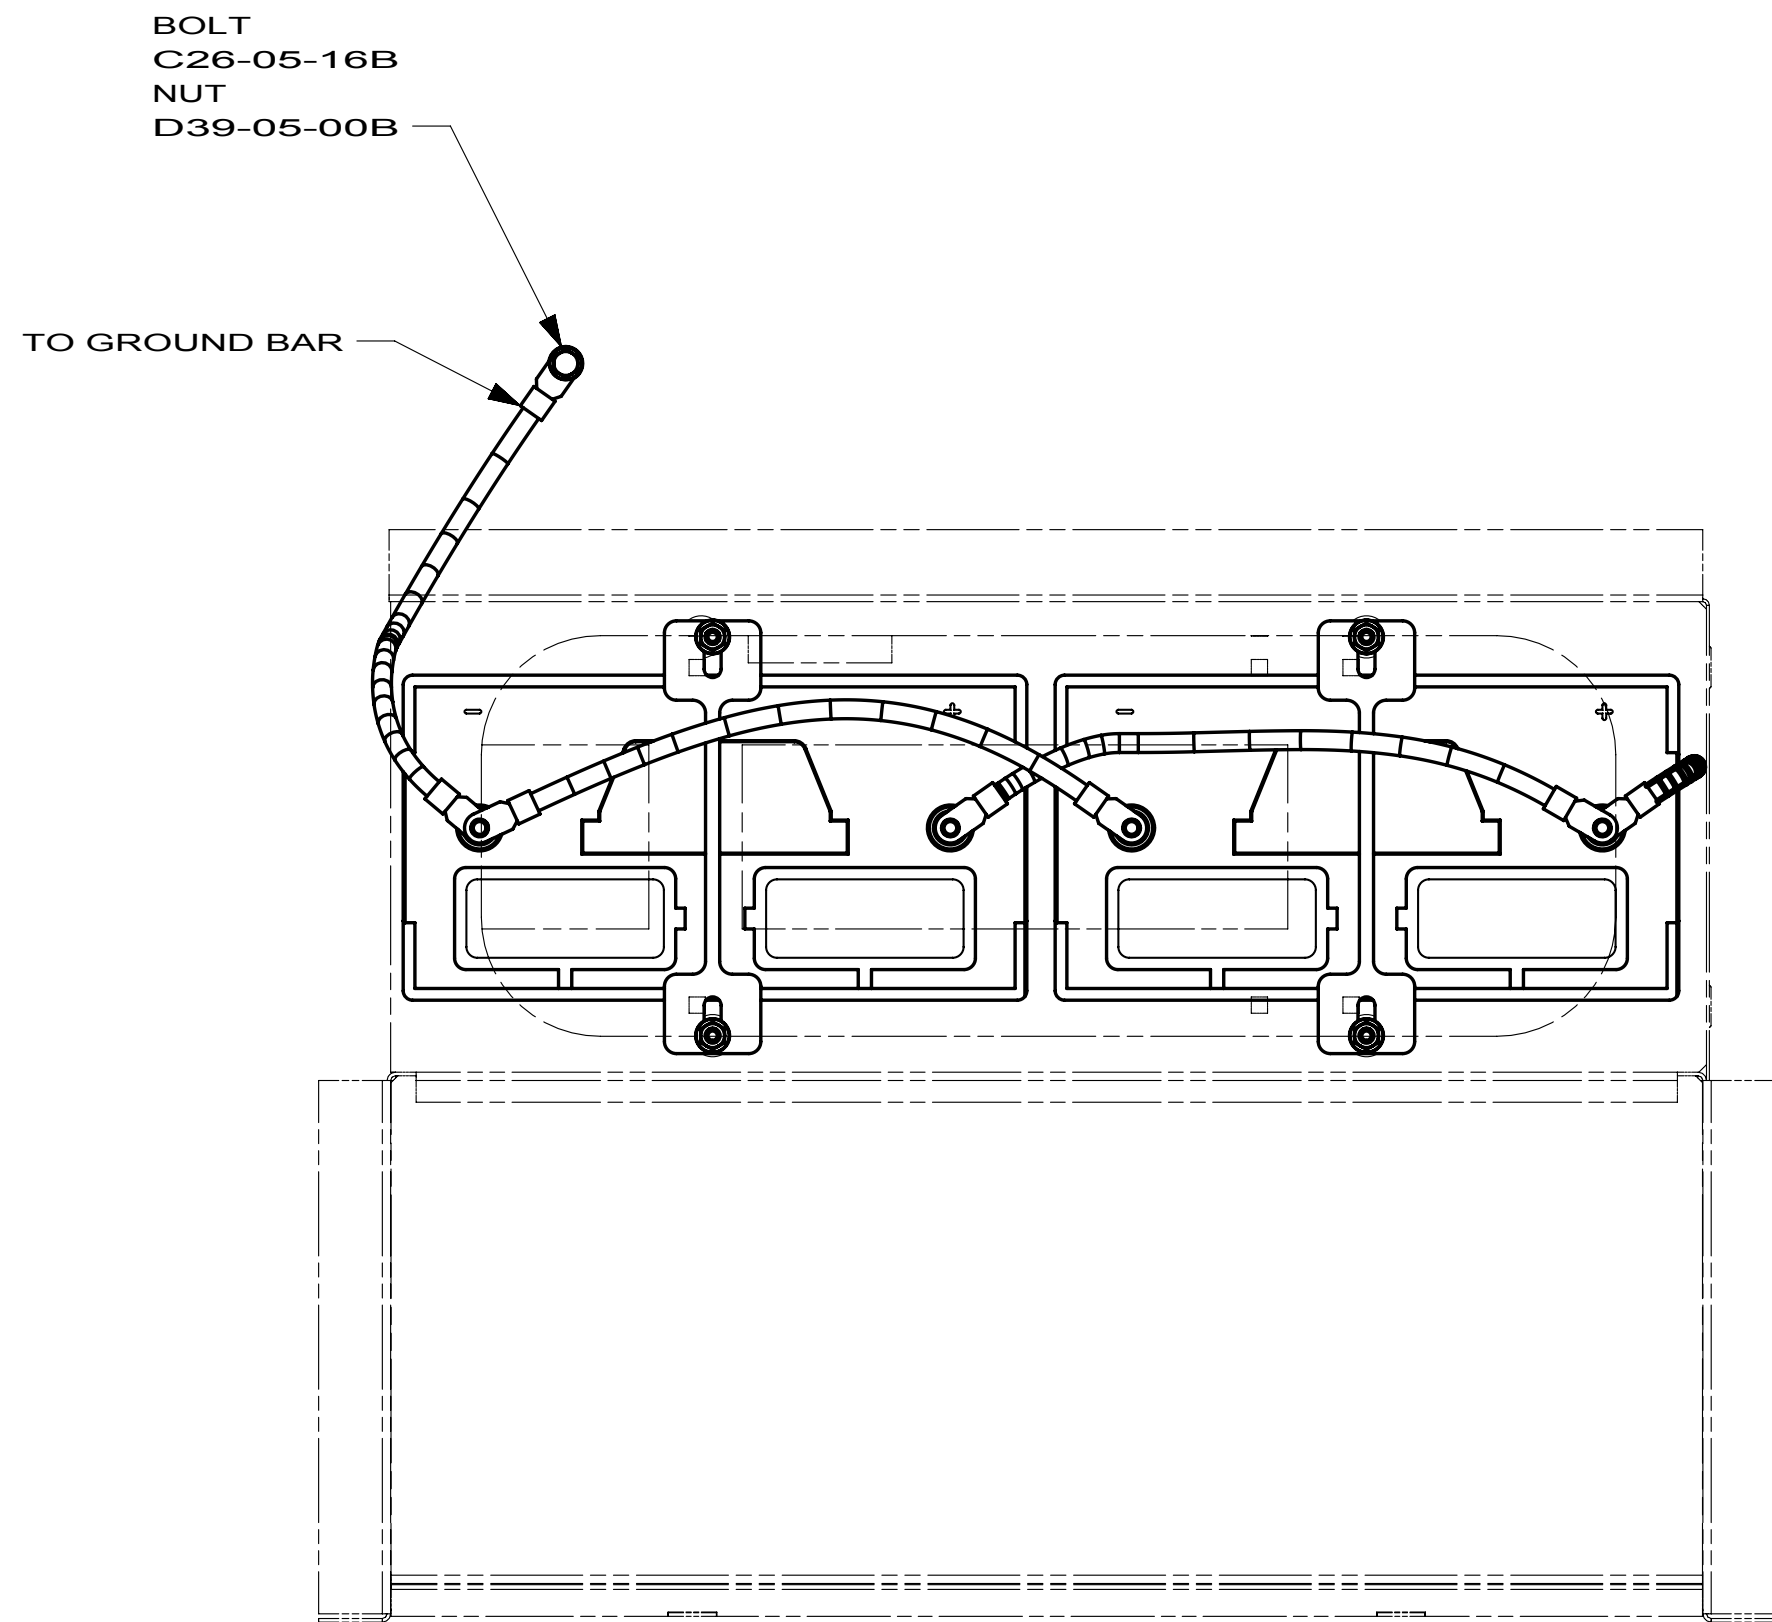

VIEW CA

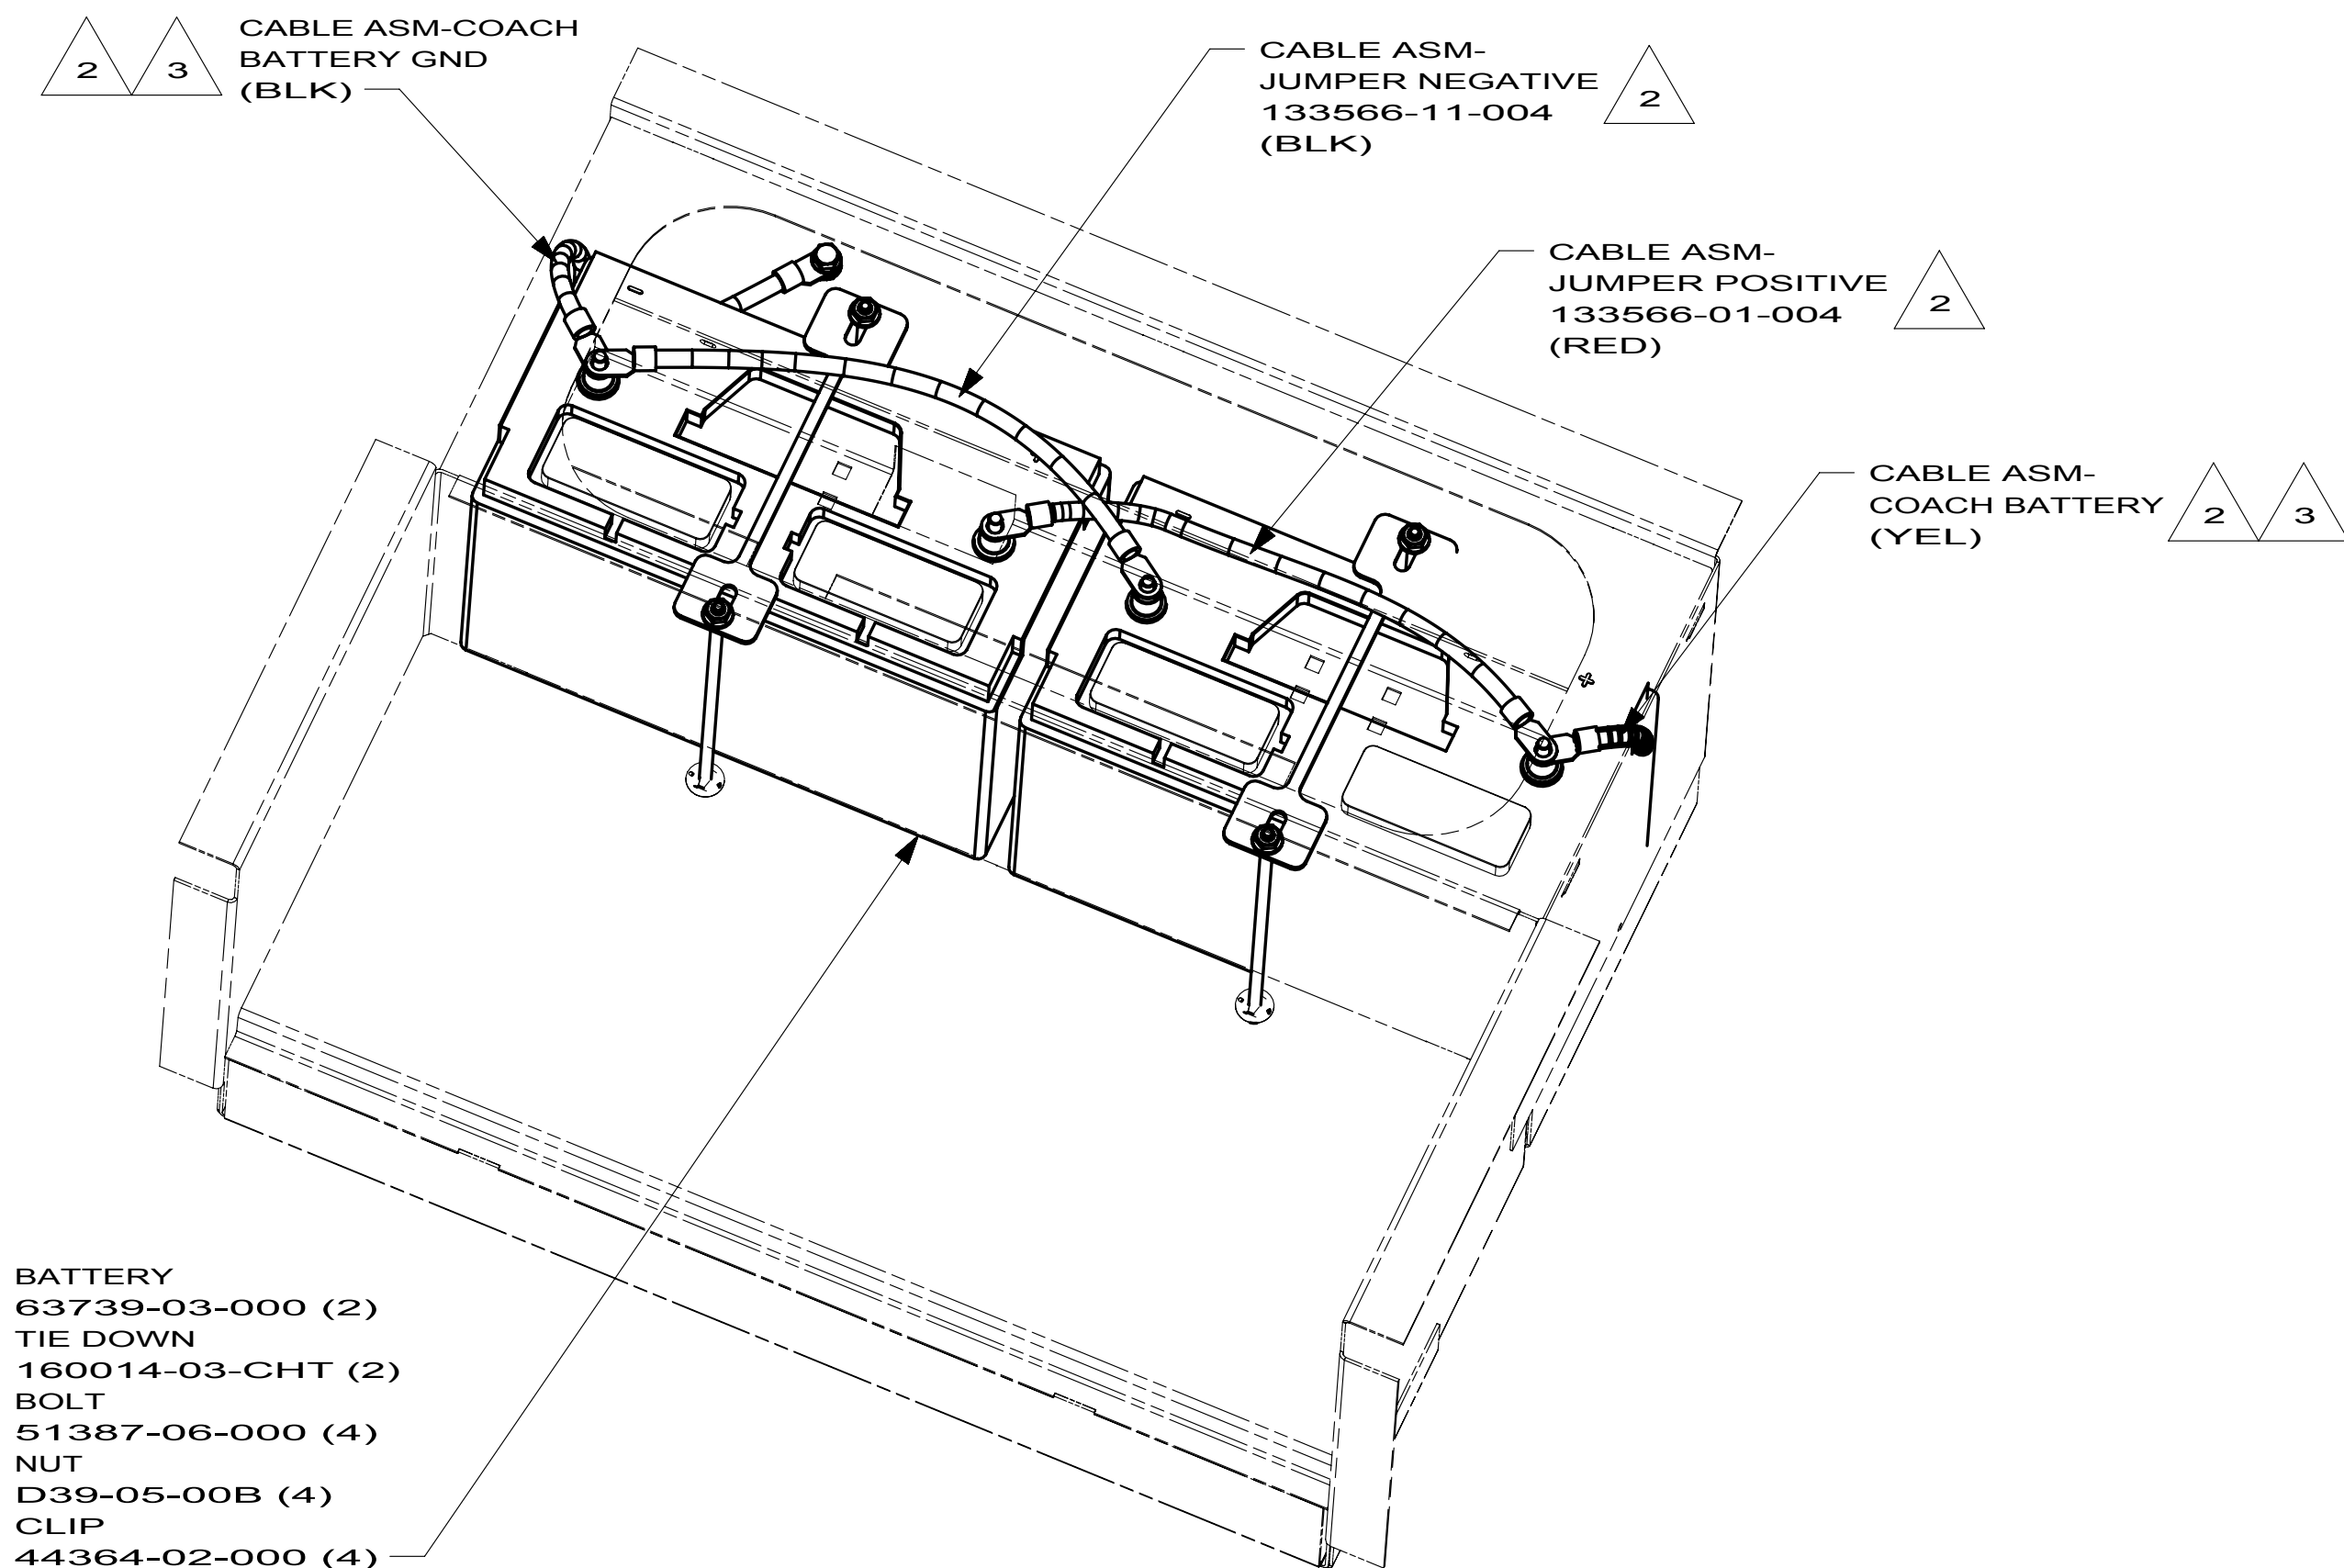

BATTERY BOX

- 3 THE POSITIVE AND NEGATIVE BATTERY CABLES ARE TO BE TERMINATED ON OPPOSITE BATTERIES.
- 2 BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

NOTES:

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

22W BATTERY-SECOND

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 22W

FIRST USED		
09 200/300/700 SER		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 3	PART NO 165490	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

8			7			6			5			4			3			2			1		
DRAWING NO.		FEATURES		SHEETS																			
170020-01		12X		1,2																			
170020-02		22W		1,3																			
						224V		229T		231C		231J		231N									
CABLE ASM-STARTER (RED)		16B 16C 16Y				141415-34-048		141415-34-048		141415-34-053		141415-34-052		141415-34-068									
CABLE ASM-COACH BATTERY (YEL)		16B 16C 16Y				141415-52-012		141415-52-021		141415-52-016		141415-52-018		141415-52-024									
CABLE ASM-COACH BATTERY GND (BLK)		16B 16C 16Y				133566-12-008		133566-12-009		133566-12-008		133566-12-008		133566-12-008									
CABLE ASM-GENERATOR (GRN)		16B 16C 16Y				141415-42-032		141415-42-065		141415-42-068		141415-42-028		141415-42-050									
CABLE ASM-GENERATOR GND (BLK)		16B 16C 16Y				133566-11-008		133566-11-008		133566-11-008		133566-11-008		133566-11-008									
				329B				331C															
CABLE ASM-STARTER (RED)		16Y		141415-34-056				141415-34-052															
CABLE ASM-COACH BATTERY (YEL)		16Y		141415-52-021				141415-52-020															
CABLE ASM-COACH BATTERY GND (BLK)		16Y		133566-12-007				133566-12-006															
CABLE ASM-GENERATOR (GRN)		16Y		141415-42-044				141415-42-066															
CABLE ASM-GENERATOR GND (BLK)		16Y		133566-11-008				133566-11-008															
LEVELING SYSTEM POWER CABLE (BLU)		60M		141415-22-045				141415-22-030															
				728B		730C																	
CABLE ASM-STARTER (RED)		16Y		141415-34-057		141415-34-053																	
CABLE ASM-COACH BATTERY (YEL)		16Y		141415-52-020		141415-52-020																	
CABLE ASM-COACH BATTERY GND (BLK)		16Y		133566-12-008		133566-12-008																	
CABLE ASM-GENERATOR (GRN)		16Y		141415-42-024		141415-42-075																	
CABLE ASM-GENERATOR GND (BLK)		16Y		133566-11-008		133566-11-008																	
LEVELING SYSTEM POWER CABLE (BLU)		60M		141415-22-010		141415-22-011																	
2 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.																							
1 ROUTING OF CABLES SHOWN ON WIRING INSTL-CHASSIS ONLY.																							
NOTES:																							
8			7			6			5			4			3			2			1		

RELEASE

REV A

DATE

DWG NO 170020

REV

ZONE

REVISION RECORD

DATE

DFTR.Orig

60M

HYDRAULIC LEVEL JACKS-AUTO

644

GREAT ALASKAN RENTAL PACKAGE

22W

BATTERY-SECOND

12X

BATTERY-ONE

16Y

FORD CHASSIS - 14,500#

16C

FORD CHASSIS 11,500 LB.GVWR

16B

FORD CHASSIS 10,700 LB.GVWR

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

WINNEBAGO INDUSTRIES

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.

DFTR

CHKR

P.E.

M.E.

DSNR

ORIG. DATE

ALL DIMENSIONS ARE IN MILLIMETERS

FIRST USED

10 200/300/700 SER

UNSPECIFIED TOLERANCES ARE:

WHOLE DIM (X) ±

ONE-PLACE (X.X) ±

TWO-PLACE (X.XX) ±

ANGLE ±

MATERIAL:

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

TITLE:

BATTERY INSTL

SHEET 1 OF 3

PART NO 170020

REV

REF:

1


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000




BOLT
C26-05-16B
NUT
D39-05-00B
TO GROUND BAR

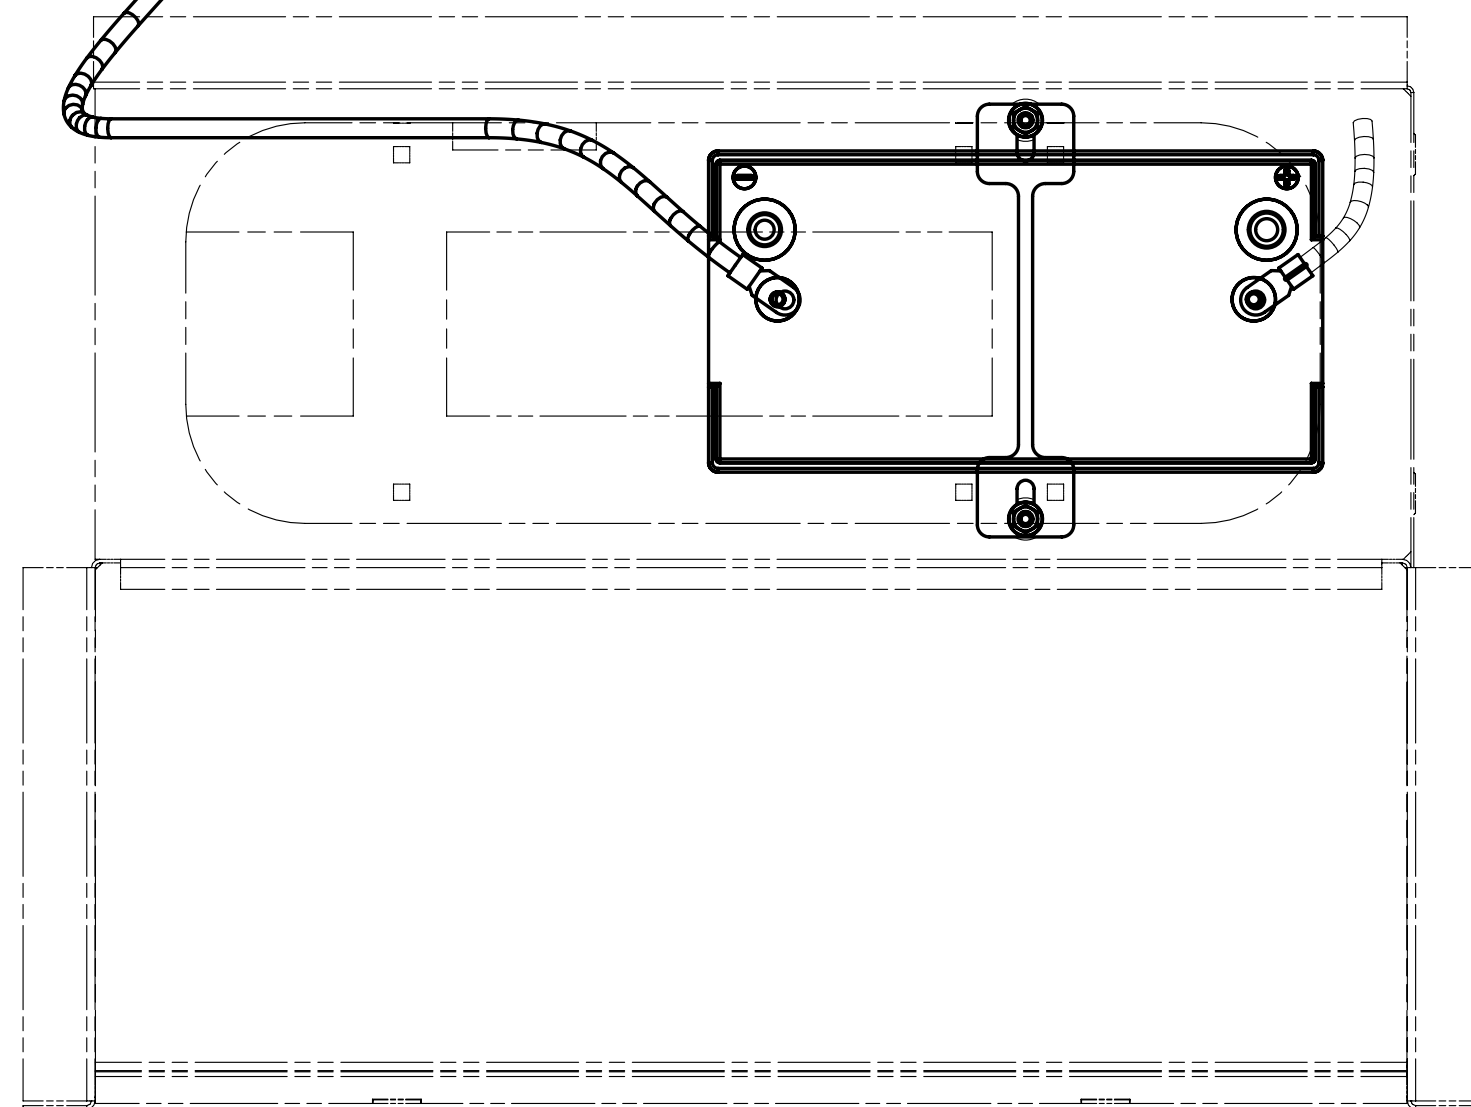

VIEW BA

BATTERY
63739-03-000
TIE DOWN
160014-03-CHT
BOLT
51387-06-000 (2)
NUT
D39-05-00B (2)
CLIP
44364-02-000 (2)

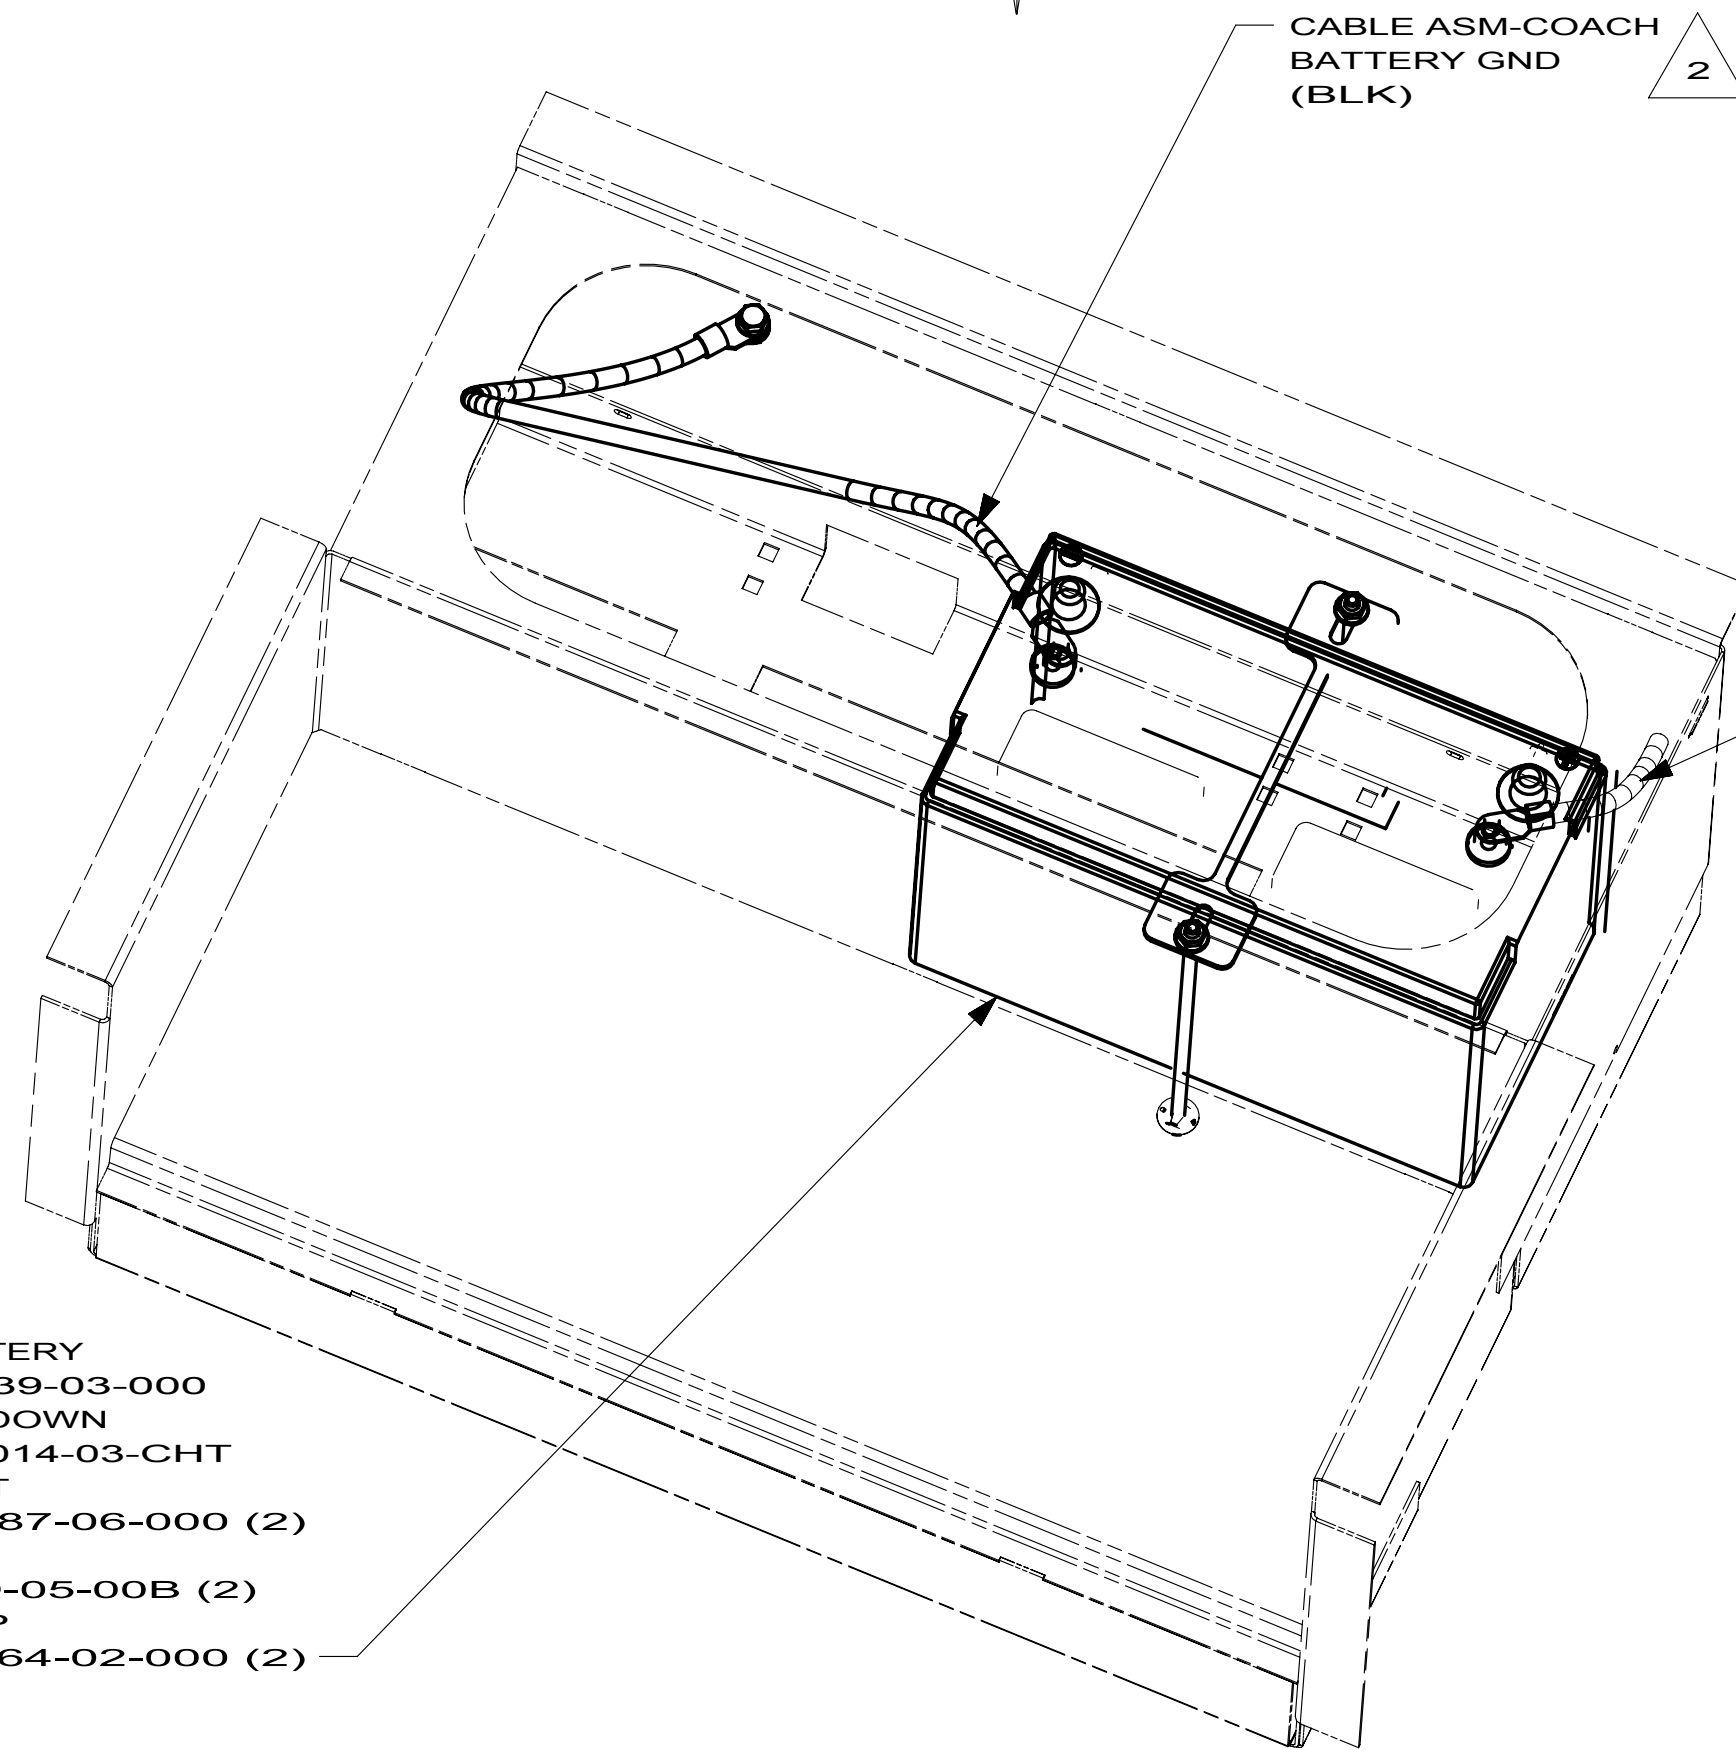

BATTERY BOX

CABLE ASM-COACH
BATTERY GND
(BLK)

2

CABLE ASM-
COACH BATTERY
(YEL)

2

2 BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

12X BATTERY-ONE
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA


1B1 265 12X

FIRST USED
10 200/300/700 SER


DO NOT SCALE DRAWING

TITLE:
BATTERY INSTL

SHEET 2 PART NO 170020 REV

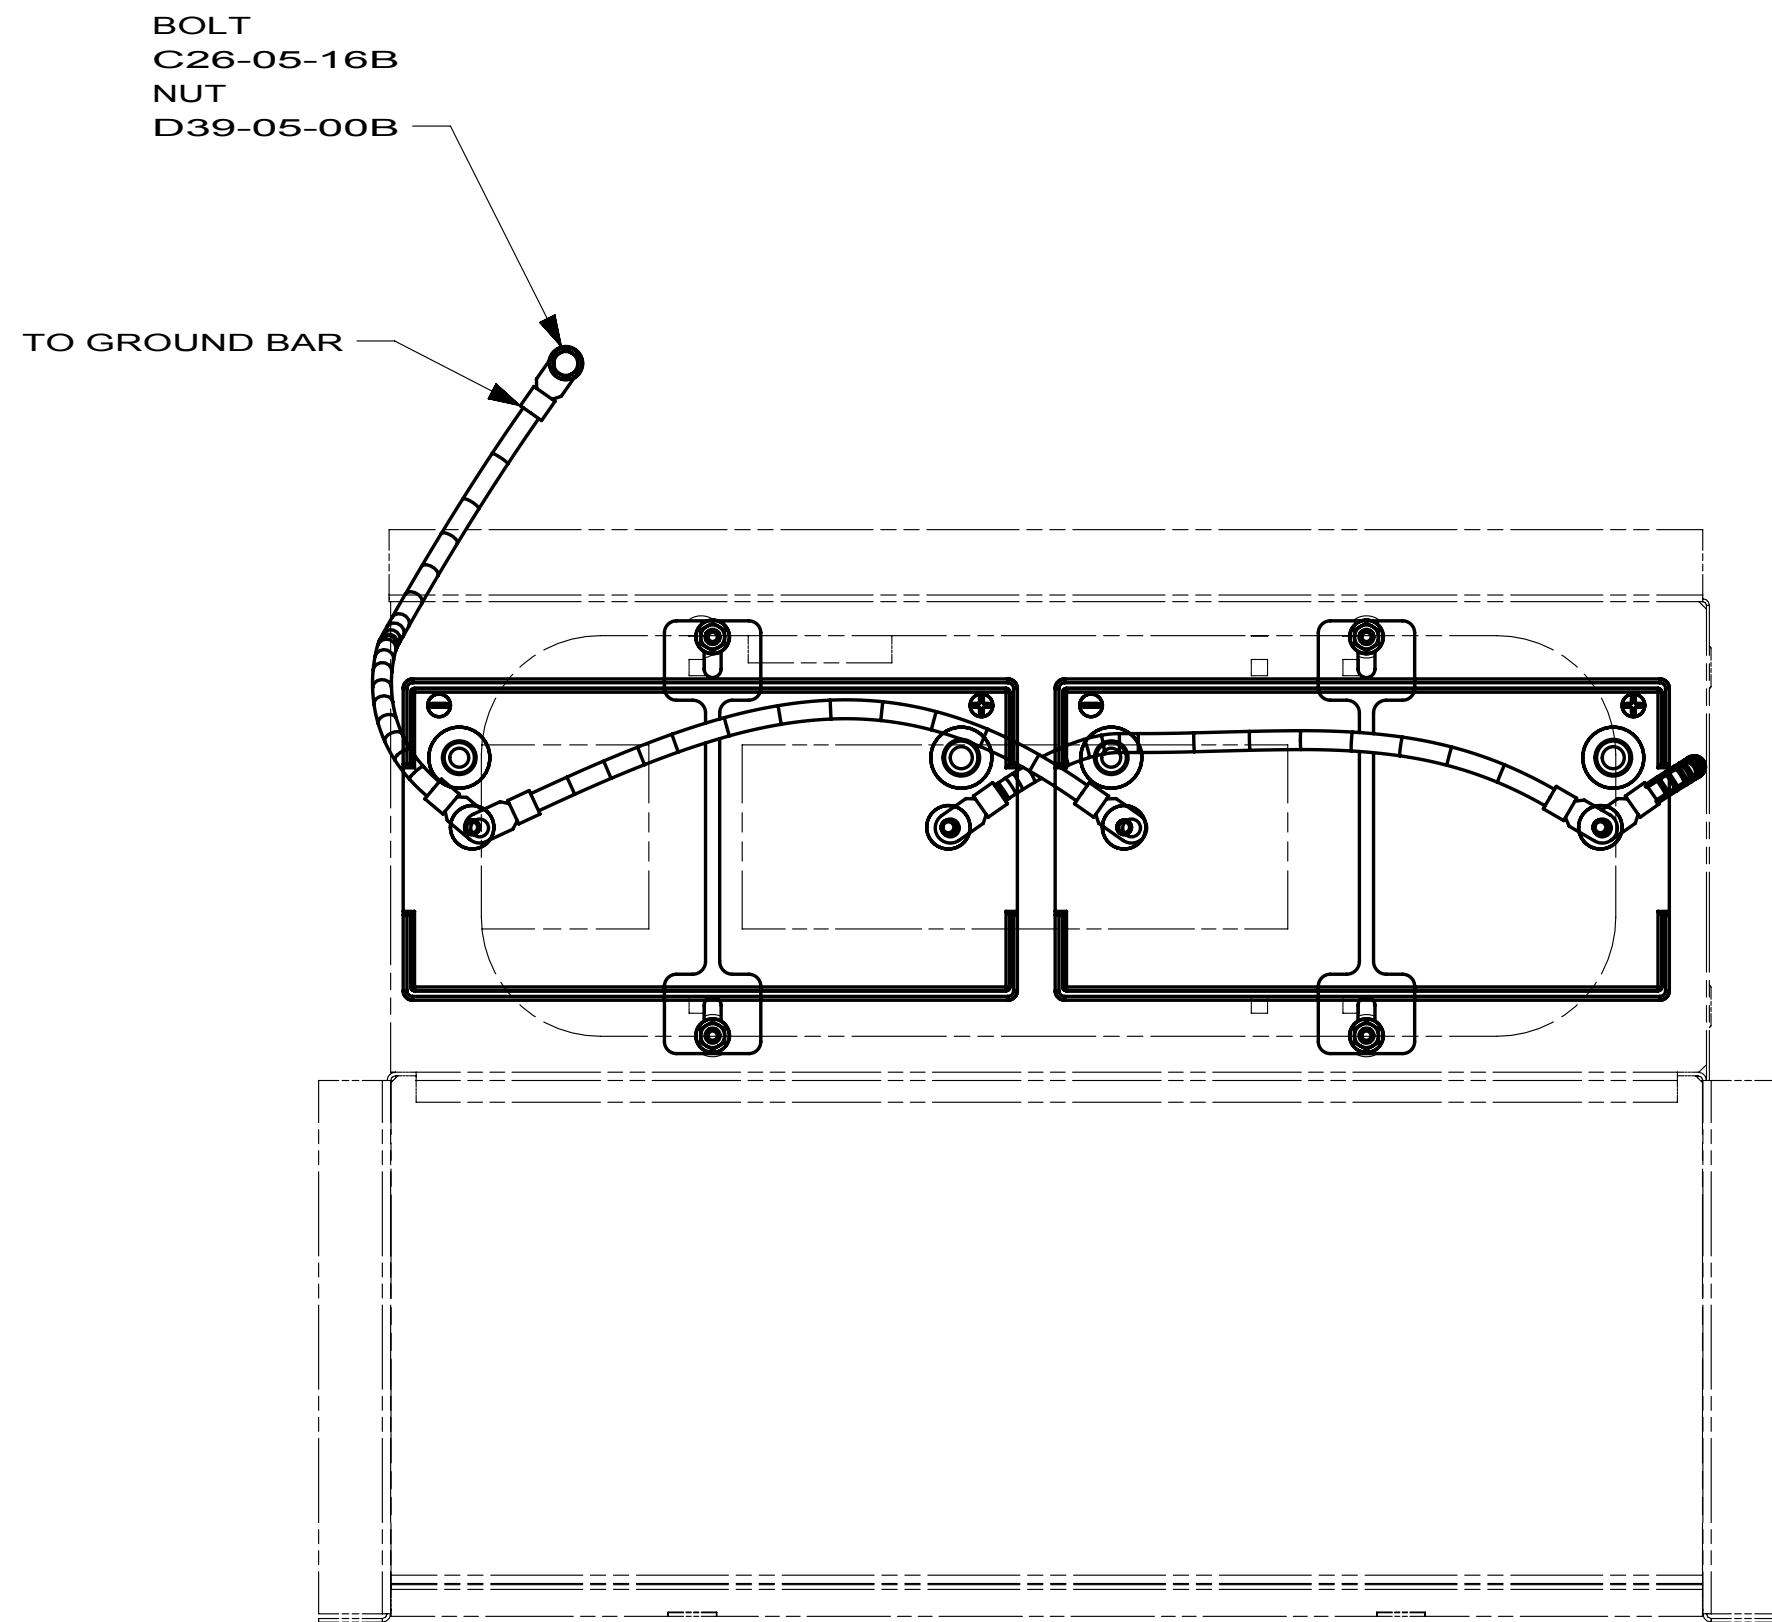

VIEW CA

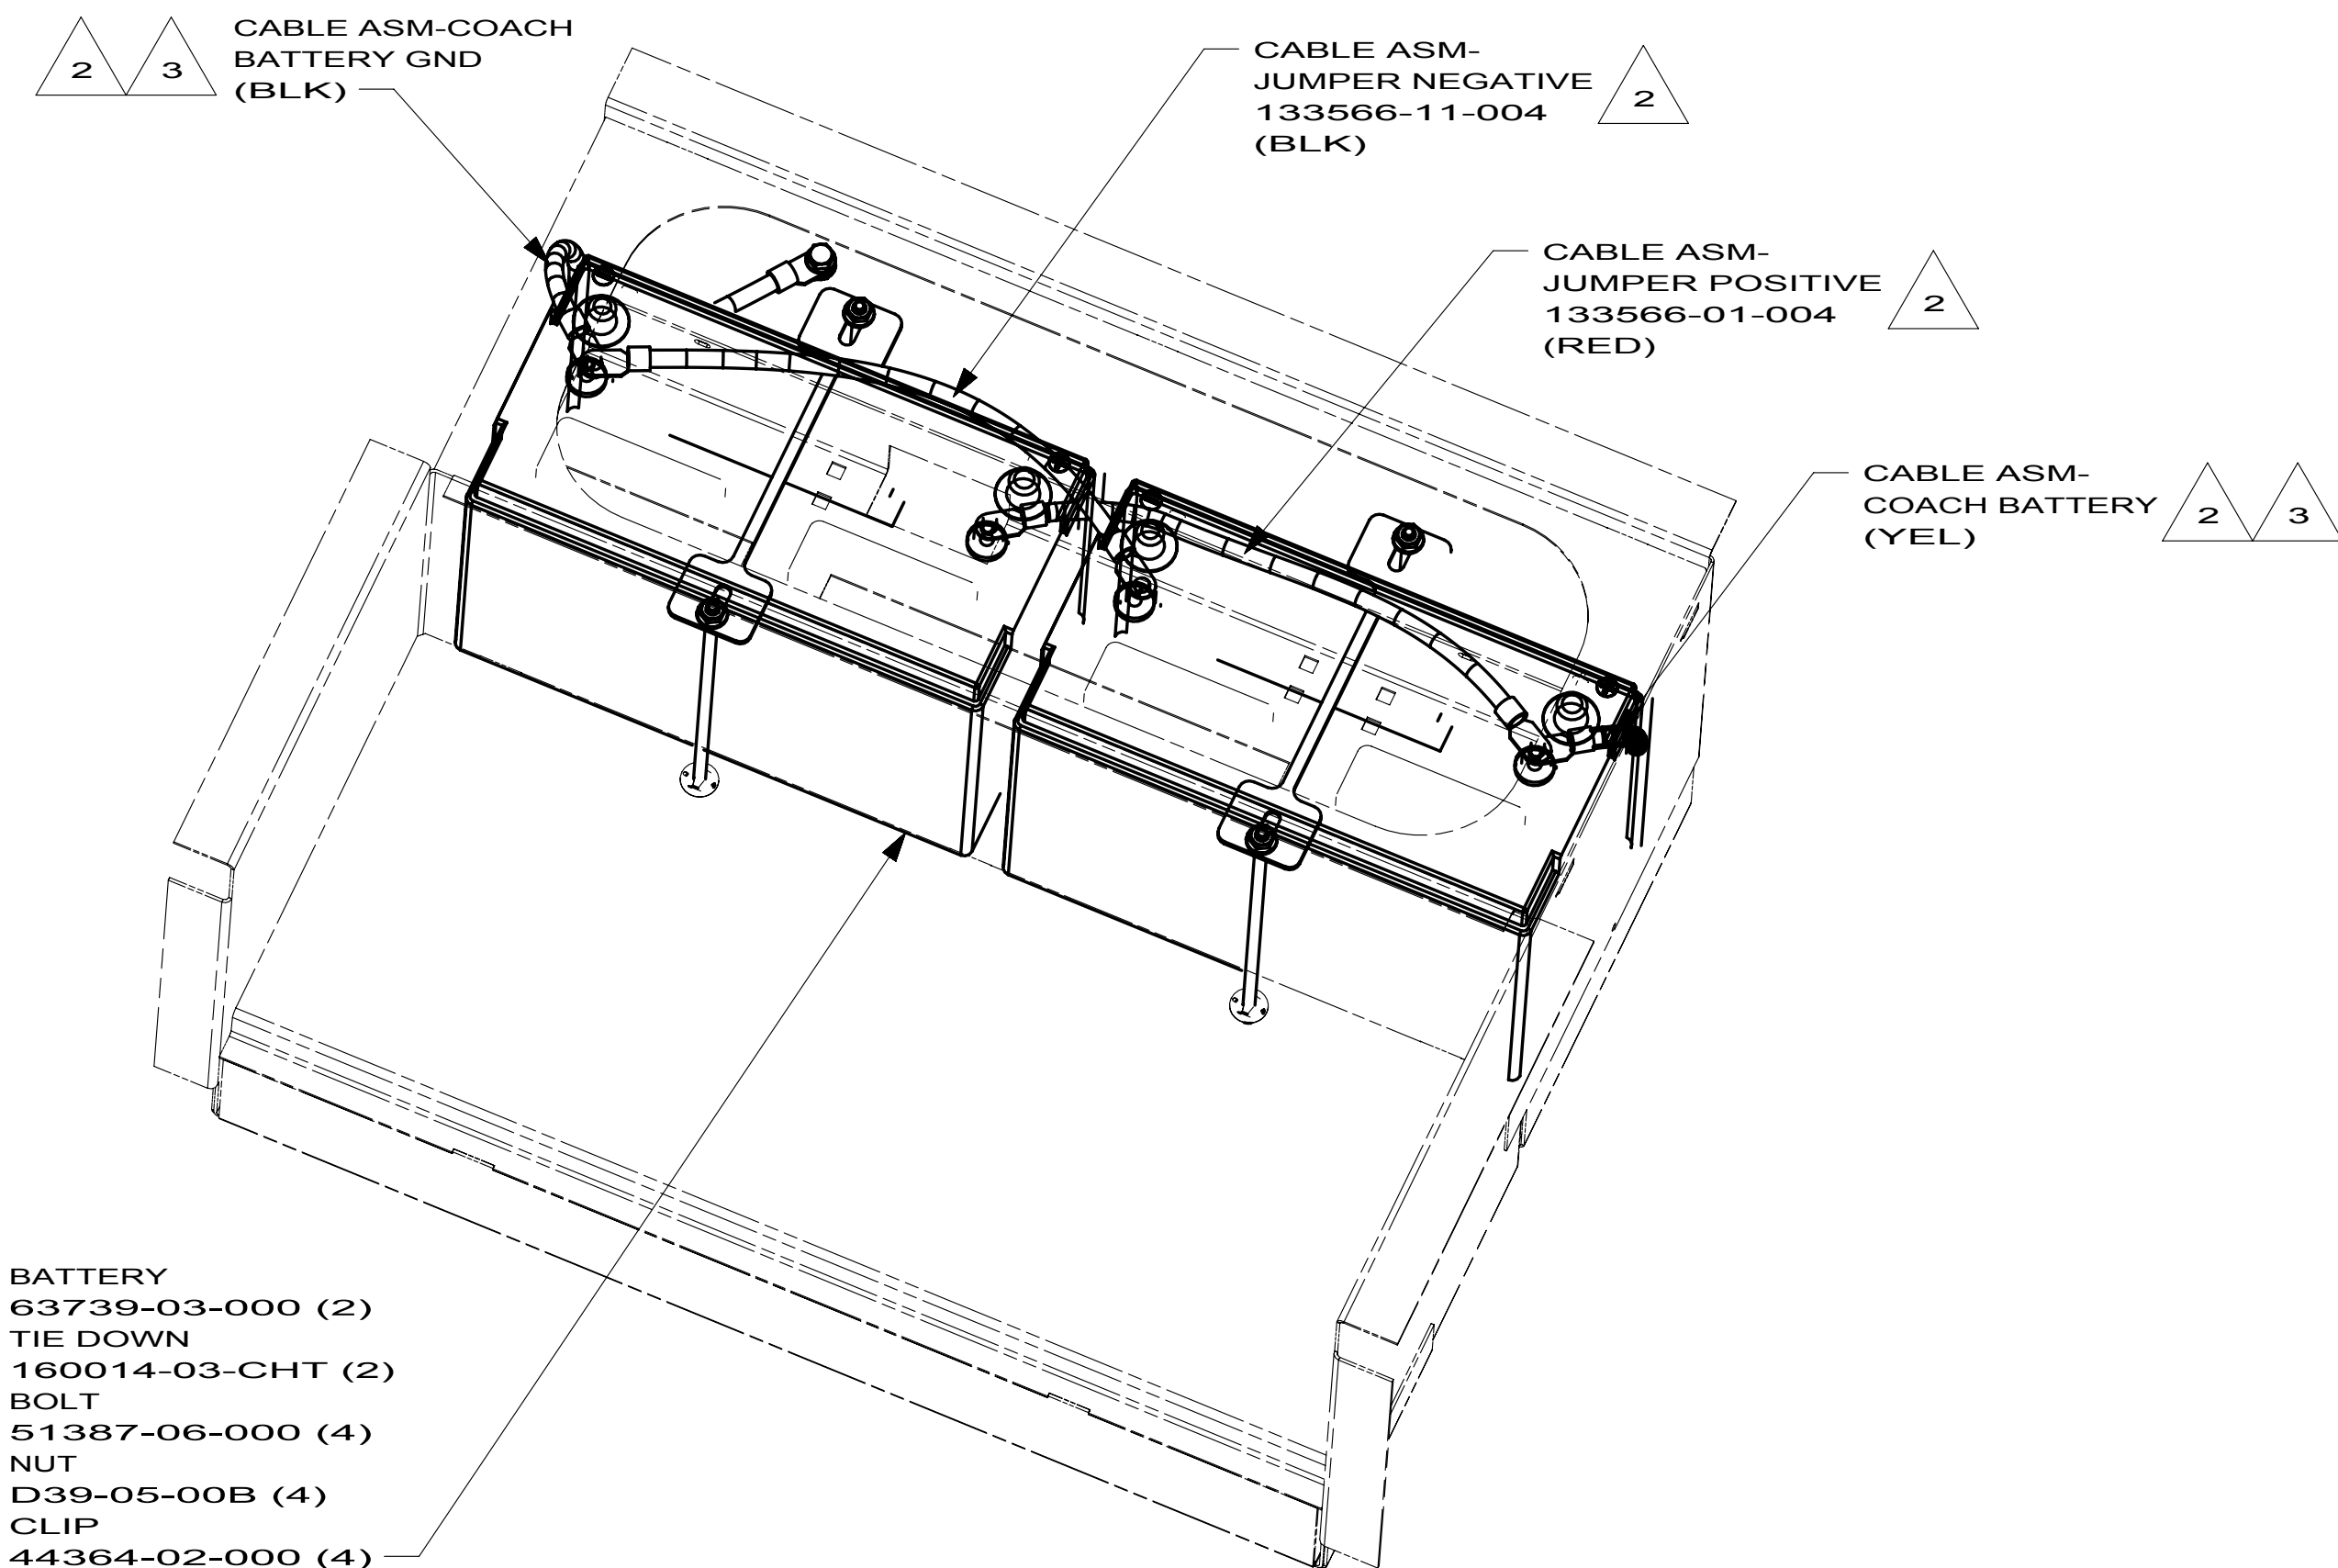

BATTERY BOX

- 3 THE POSITIVE AND NEGATIVE BATTERY CABLES ARE TO BE TERMINATED ON OPPOSITE BATTERIES.
- 2 BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

22W BATTERY-SECOND

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA


1B1 265 22W

FIRST USED		
10 200/300/700 SER		
DO NOT SCALE DRAWING		
TITLE:		
BATTERY INSTL		
SHEET 3	PART NO 170020	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000




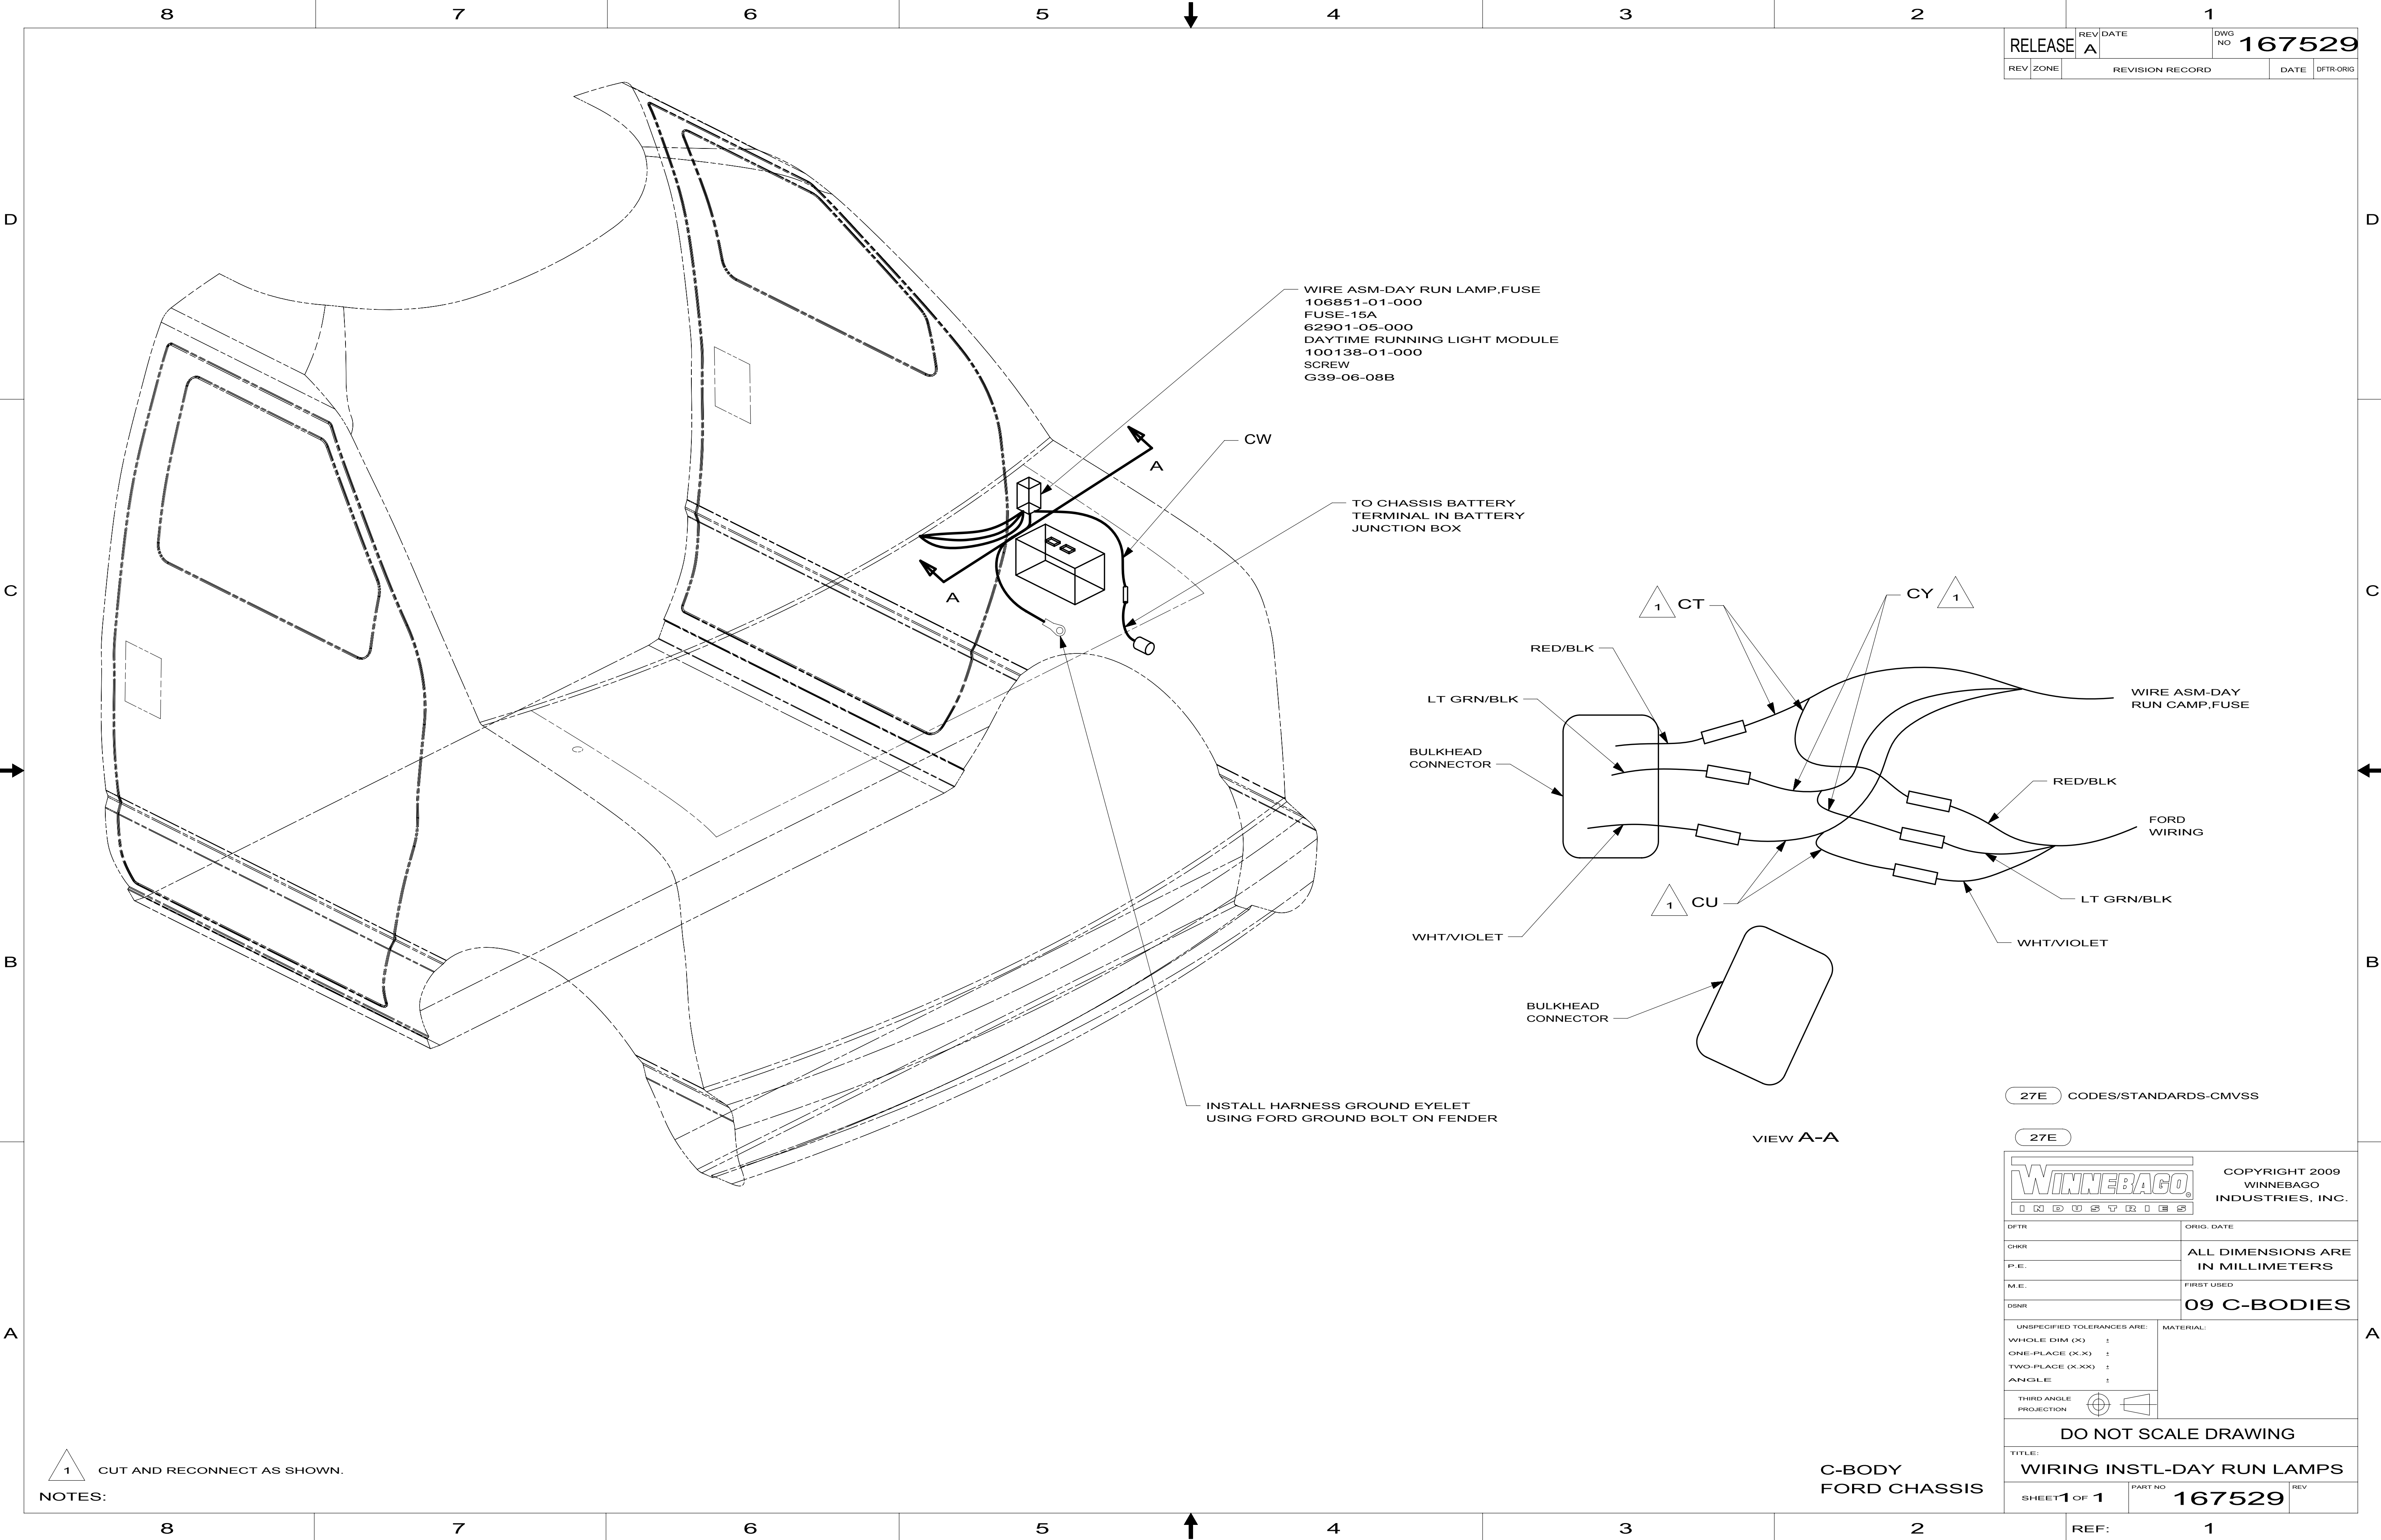

WIRE ASM-DAY RUN LAMP, FUSE
106851-01-000
FUSE-15A
62901-05-000
DAYTIME RUNNING LIGHT MODULE
100138-01-000
SCREW
G39-06-08B

TO CHASSIS BATTERY
TERMINAL IN BATTERY
JUNCTION BOX

INSTALL HARNESS GROUND EYELET
USING FORD GROUND BOLT ON FENDER

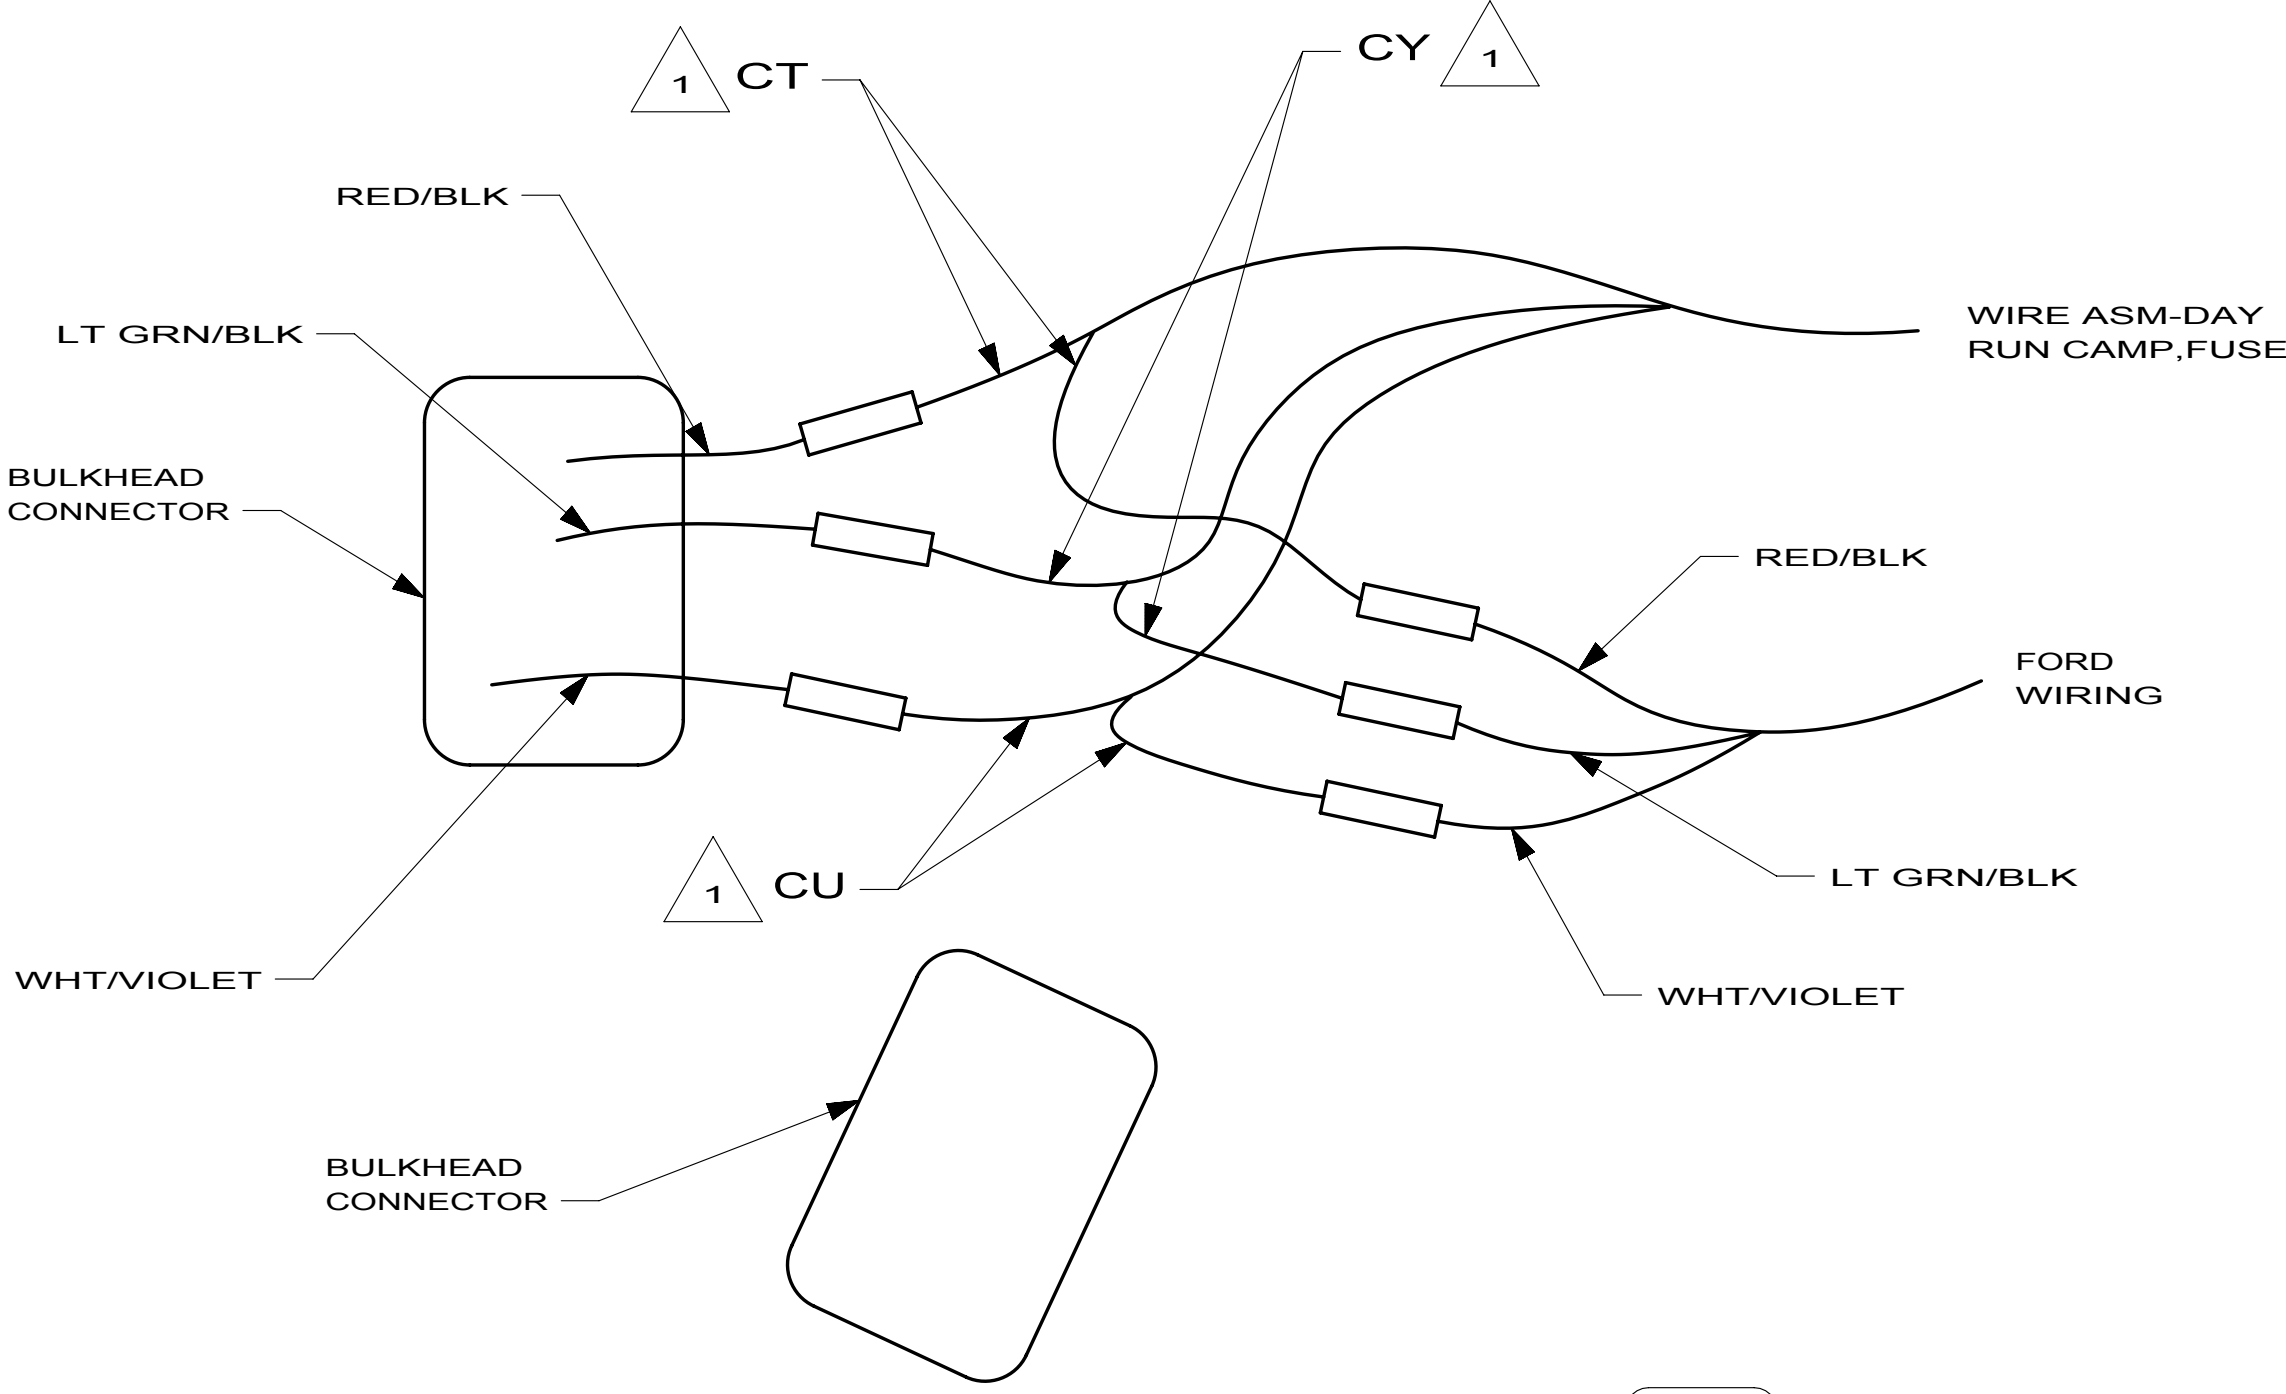

VIEW A-A

NOTES:
1 CUT AND RECONNECT AS SHOWN.

C-BODY
FORD CHASSIS

RELEASE		REV	DATE	DWG NO	167529
REV	ZONE	REVISION RECORD			DATE
					DFT-ORIG

27E CODES/STANDARDS-CMVSS

27E

		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT-ORIG		ORIG. DATE	
CHKR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.		FIRST USED	
DSNR		09 C-BODIES	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ±			
ONE-PLACE (X.X) ±			
TWO-PLACE (X.XX) ±			
ANGLE ±			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-DAY RUN LAMPS			
SHEET 1 OF 1		PART NO	167529
REF:		1	

8

7

6

5

4

3

2

1

TERMINALS

NO.	PART NUMBER	DESCRIPTION
B-1 B-2 B-11 B-12	50003-01 50004-01 50003-02 50004-02	TERMINAL-PIN, 16-14 GA,.156 DIA TERMINAL-RECP, 16-14 GA,.156 DIA TERMINAL-PIN, 16-14 GA,.180 DIA TERMINAL-RECP, 16-14 GA,.180 DIA
WP-1 WP-2 WP-3	106950-01 106950-02 106950-03	TERMINAL-PIN, 16-14 GA TERMINAL-PIN, 10-12 GA TERMINAL-PIN, 8 GA
R-1 R-2 R-3 R-4 R-5 R-6 R-7 R-8 R-9	35416-01 35416-02 35416-03 35416-04 37018-01 102777-01 102777-02 102777-03 33787-01	TERMINAL-RING, #10 STD, 8 GA TERMINAL-RING, #10 STD, 6 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, 5/16 STD, 12-10 GA TERMINAL-RING, #6 STD, 14-16 GA TERMINAL-RING, #6 STD, 10-12 GA TERMINAL-RING, #6 STD, 8 GA TERMINAL-RING, #10 STD, 14 GA
R-60 R-61 R-62 R-63 R-64 R-65 R-66 R-67 R-68 R-69 R-70 R-71	8325-01 8326-01 8327-01 8328-01 8328-02 8329-01 8331-01 8332-01 8332-02 8350-01 99275-02 101397-01	TERMINAL-RING, 1/4 STD, 14-16 GA TERMINAL-RING, 3/8 STD, 14-16 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 8 GA TERMINAL-RING, 3/8 STD, 4 GA TERMINAL-RING, 1/4 STD, 6 GA TERMINAL-RING, 1/4 STD, 10 GA TERMINAL-RING, 3/8 STD, 6 GA TERMINAL-RING, 7/16 STD, 8 GA TERMINAL-RING, #10 STD, 14-16 GA
R-91 R-92 R-93 R-94	88791-01 88791-02 8348-01 99275-01	TERMINAL-RING, 3/8, 90° , 1/0 GA TERMINAL-RING, 3/8, 90° , 2 GA TERMINAL-RING, 3/8 STD, 2 GA TERMINAL-RING, 7/16 STD, 1/0 GA
RF-51 RF-52	7944-01 7945-01	TERMINAL-SPADE, 12-10 GA, #8 STUD TERMINAL-SPADE, 18-14 GA, #8 STUD
TR-1 TR-2 TR-3 TR-11 TR-12	47443-01 47443-02 47443-05 47443-03 47443-04	TERMINAL-RECP, 16-14 GA,.25, INS TERMINAL-RECP, 12-10 GA,.25, INS TERMINAL-RECP, 22-18 GA,.25, INS TERMINAL-RECP, 16-14 GA,.19, INS TERMINAL-RECP, 16-14 GA,.11, INS
TR-21	80015-01	TERMINAL-RECP, 22-18 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-22	80015-02	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-23	80015-03	TERMINAL-RECP, 16-14 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-24	80015-04	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .020
TR-51 TR-52 TR-53 TR-54 TR-55	7940-01 23809-01 23809-02 49270-01 7940-02	TERMINAL-RECP, 16-12 GA,.25, UNINS TERMINAL-RECP, 16-14 GA,.19, UNINS TERMINAL-RECP, 18-20 GA,.25, UNINS TERMINAL-RECP, 18-20 GA,.19, UNINS TERMINAL-RECP, 10 GA, .25, UNINS
TT-1 TT-2 TT-11	85745-02 85745-03 85745-04	TERMINAL-TAB, 16-14 GA,.25, INS TERMINAL-TAB, 10-12 GA,.25, INS TERMINAL-TAB, 18-22 GA,.19, INS
TT-51 TT-52	7942-01 7943-01	TERMINAL-TAB, 16-14 GA,.25, UNINS TERMINAL-TAB, 14-10 GA,.25, UNINS
MF6-1	129236-01	TERMINAL-FEM, M/P, 630, 10-12
MF6-2	129236-02	TERMINAL-FEM, M/P, 630, 14-16

SPLICES

NO.	PART NUMBER	DESCRIPTION
BS-1 BS-2 BS-3 BS-SB	31876-01 31876-02 31876-03 100070-01	SPLICE-BUTT, 16-14 GA, BLUE SPLICE-BUTT, 12-10 GA, YELLOW SPLICE-BUTT, 22-18 GA, RED SPLICE-BUTT, 14-16 GA, SHRINK,BLUE
BS-RB	112823-01	SPLICE-BUTT, 14-22 GA, REDUCER
BS-RS	173854-01	SPLICE-BUTT, 14-22 GA, REDUCER, SHRINK
S-1 S-2	7946-01 23808-01	SPLICE, 1-6 MM² SPLICE, 6-9 MM²
I-2 I-5	7956-02 7956-05	SHRINK WRAP .375 DIA SHRINK WRAP .25 DIA
SH-1	58028-01	SPLICE-HAT
S-10	101173-01	SPLICE-BARREL, 26300 CMA

NO.	PART NUMBER	DESCRIPTION
SP-1	90986-02	PLUG ASM-ELECTRIC STEP
SP-2	142524-01-000 098261-01-000 098262-07-000 098261-02-000 (3) 098262-01-000 (3)	HOUSING-4 PIN SOCKET-CONNECTOR SEAL-CONNECTOR SOCKET-CONNECTOR SEAL-CONNECTOR
HR-1	63910-01	HOUSING-RELAY
MP-8 MP-10 MPP CAV-1 CON-3	125323-02 125323-01 125324-01 125325-01 98262-03	HOUSING-PIN, 8 CAVITY HOUSING-PIN, 10 CAVITY TERMINAL-MALE, M/P, 150 SEAL-CAVITY, 150-SERIES M/P SEAL-CONNECTOR
LS-8 LS-10	125323-03 125323-04	LOCK-SECONDARY 8 POSITION LOCK-SECONDARY 10 POSITION
H-8 H-12	108355-01 108355-02	HOUSING-SWITCH, 8 POSITION HOUSING-SWITCH, 12 POSITION

NO.	PART NUMBER	DESCRIPTION
GEN-1	125323-02-000 125324-01-000 (4) 098262-03-000 (4) 125325-01-000 (4) 125323-03-000	HOUSING-8 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 8 POSITION
GEN-2	125323-01-000 125324-01-000 (5) 098262-03-000 (5) 125325-01-000 (5) 125323-04-000	HOUSING-10 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 10 POSITION

HOUSINGS AND TERMINALS

NO.	PART NUMBER	DESCRIPTION
HS-2 HS-3 HS-4 HS-5 HS-6 HS-7 HS-9 HS-12 HS-15 HS-2-R	88474-10 88474-09 88474-08 88474-07 88474-06 88474-05 88474-03 88474-01 88474-02	HOUSING-SOCKET, 2 CAVITY HOUSING-SOCKET, 3 CAVITY HOUSING-SOCKET, 4 CAVITY HOUSING-SOCKET, 5 CAVITY HOUSING-SOCKET, 6 CAVITY HOUSING-SOCKET, 6 CAVITY-IN LINE HOUSING-SOCKET, 9 CAVITY HOUSING-SOCKET, 12 CAVITY HOUSING-SOCKET, 15 CAVITY HOUSING-SOCKET, 2 CAVITY-RED
HP-2 HP-3 HP-4 HP-5 HP-6 HP-7 HP-8 HP-9 HP-12 HP-15 HP-2-R HP-3-B HP-3-G HP-3-R	88473-10 88473-09 88473-08 88473-07 88473-06 88473-05 88473-04 88473-03 88473-01 88473-02 88473-15 88473-12 88473-13 88473-14	HOUSING-PIN, 2 CAVITY HOUSING-PIN, 3 CAVITY HOUSING-PIN, 4 CAVITY HOUSING-PIN, 5 CAVITY HOUSING-PIN, 6 CAVITY HOUSING-PIN, 6 CAVITY-IN LINE HOUSING-PIN, 8 CAVITY-IN LINE HOUSING-PIN, 9 CAVITY HOUSING-PIN, 12 CAVITY HOUSING-PIN, 15 CAVITY HOUSING-PIN, 2 CAVITY-RED HOUSING-PIN, 3 CAVITY-BLUE HOUSING-PIN, 3 CAVITY-GREEN HOUSING-PIN, 3 CAVITY-RED
TS-1 TS-2	88476-01 88476-02	SOCKET-CONNECTOR, 20-14 GA SOCKET-CONNECTOR, 12-10 GA
TP-1 TP-2	88475-01 88475-02	PIN-CONNECTOR, 20-14 GA PIN-CONNECTOR, 12-10 GA
HS2HA HP2HA	137208-01 137207-01	HOUSING-SOCKET, 2 CAVITY-HIGH AMP HOUSING-PIN, 2 CAVITY-HIGH AMP
TS-HA TP-HA	137210-01 137209-01	SOCKET-CONNECTOR, 10AWG HIGH AMP PIN-CONNECTOR, 10AWG HIGH AMP
H-HA	104100-01	HOUSING, 1 CAVITY 75 AMP
T-HA	104100-03	TERMINAL 10 AWG - 6 AWG 75 AMP

BALLOON CALLOUT LEGEND

110 V WIRE	TERMINALS/SPLICES	RECEPTACLES
PART NUMBER COLOR LENGTH	PART NUMBER QUANTITY	PART NUMBER CIRCUIT COLOR LOCATION
POWER CORD	CONDUIT	12 V WIRE
WIRE GAUGE LENGTH IN FEET APPROVAL/ LISTING	TYPE DIA IN 1/16" INCREMENTS LENGTH (mm)	CIRCUIT COLOR & WIRE GAUGE HOUSING POSITION/ TERMINATION

NOTES:

1

FOR RECP-BLANK, DET-X DENOTES DETAIL VIEW.

2

CONTACT WIRE PREP PRIOR TO USING FOR TOOLING PURPOSES.

8

7

6

5

4

3

2

1

REF:

1

2/17/2010

8

7

6

5








4

3


2

1

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-1	LAMP 98024-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-1	LAMP 98024-03-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-1	LAMP 98024-05-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-1	LAMP 98024-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N1	LAMP 98024-07-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LF2N1	LAMP 98024-08-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN1	LAMP 98024-09-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,PORCH

NO	PART NUMBER	DESCRIPTION
LEXT-1	LAMP 97917-01-CHT SCREW G67-10-129 (4) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, SURFACE MOUNT BARGMAN 
LEXT-2UL	LAMP 8089-01-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED UL LIST JRV PROD 
LEXT-2CA	LAMP 8089-02-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED CAN LIST JRV PROD 
LEXT-3	LAMP 171513-01-CHT SCREW G67-10-129 (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH SURFACE MOUNT OPTRONICS

87.0

22.2 R

96

CUT OUT IN PANEL

HALOGEN LAMP

LINE SPRING CLIPS UP WITH RELIEF IN CUT OUT

DETAIL CA

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

XXXXXX

XX

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 3





PART NO121339

REV





DWG NO121339

2/17/2010

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-2	LAMP 137417-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-2	LAMP 137417-04-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-2	LAMP 137417-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-2	LAMP 137417-05-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N2	LAMP 137417-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN2	LAMP 137417-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,HALOGEN

NO	PART NUMBER	DESCRIPTION
HAL	LAMP 123775-01-CHT SCREW (SUPPLIED) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING 1 BULB 
HAL-S	LAMP 123775-01-CHT SPACER 123775-02-CHT SCREW G13-06-16U (3) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING WITH 3/4" SPACER 1 BULB 
HAL-2	LIGHT-HAL,ROUND 165170-01-CHT SCREW G13-06-12B (2) CONNECTOR 58028-01-000 (2)	LIGHT-HALOGEN, ROUND 3" 
HAL-4	LIGHT-HAL,ROUND 165643-01-CHT SCREW G13-05-16B (3) CONNECTOR 58028-01-000 (2) (SEE DETAIL CA)	LIGHT-HALOGEN, ROUND 4.5" 

8

7

6

























5

4

3

2







1

8			7			6			5			4			3			2			1																													
LAMP ASM-PACKAGE,FLUORESCENT												LAMP ASM-PACKAGE,MAKEUP LAMP												LAMP ASM-PACKAGE,OTHER												LAMP ASM-PACKAGE,PANCAKE												DWG NO 121339		
NO		PART NUMBER				DESCRIPTION						NO		PART NUMBER				DESCRIPTION						NO		PART NUMBER				DESCRIPTION																				
FLU-1		LAMP 91936-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH THIN-LITE 						LMU3-1		LAMP 110235-01-CHT SCREW W/SPACER (SUPPLIED) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB (SUPPLIED) PROGRESSIVE DYNAMICS 						LSH-1		LAMP 121935-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-SHOWER PROGRESSIVE DYNAMICS INC. 						LF1-3		LAMP 170693-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH GUSTAFSON 								
FLU-2		LAMP 91936-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/SWITCH THIN-LITE 						LMM3-2		LAMP 123774-03-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 3 BULB GUSTOFSON 						LSH-2		LAMP 164039-01-CHT SCREW G11-08-16U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER 						LF2-3		LAMP 170693-04-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH GUSTAFSON 								
FLU-3		LAMP 127327-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 1-12" BULB W/SWITCH THIN-LITE 						LMU3-2		LAMP 138116-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 						LSH-3		LAMP 164040-01-CHT SCREW G13-07-12U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER GLASS 						LO1-3		LAMP 170693-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH GUSTAFSON 								
FLU-4		LAMP 130338-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT W/SWITCH THIN-LITE 						LMU3-3		LAMP 162446-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 						LCR-1		LAMP 61424-01-000 SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE RAMCO (RECTANGULAR) 						L02-3		LAMP 170693-05-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH GUSTAFSON 								
FLU-5		LAMP 153464-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336						LMU4-1		LAMP 110235-02-CHT SCREW G11-08-16U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB PROGRESSIVE DYNAMICS 						LCS-1		LAMP 108354-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE ITC MARINE (SQUARE) 						LF1N3		LAMP 170693-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH GUSTAFSON 								
FLU-6		LAMP 130338-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT WARM WHITE BULB W/SWITCH THIN-LITE 						LMU4-2		LAMP 138116-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 						READ-1		LIGHT-READING 132427-01-CHT SCREW SUPPLIED W/ LIGHT CLIP-U 141395-02-CHT (2) CONNECTOR 58028-01-000 (2)				LIGHT-READING,SWIVEL,ROUND 1 BULB 						LFSN3		LAMP 170693-06-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH GUSTAFSON 								
FLU-7		LAMP 153464-05-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336						LMU4-3		LAMP 162446-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 						READ-2		LIGHT-READING 128786-02-CHT SCREW G11-08-16J (2) BULB 123917-01-000 CONNECTOR 58028-01-000 (2)				LIGHT,READING,SWIVEL 						LOS3		LAMP 170693-07-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 2 BULB W/O SWITCH GUSTAFSON 								
FLU-8		LAMP 173072-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" ONE 8 WATT BULB W/SWITCH OPTRONICS 						LMM4-2		LAMP 123774-01-CHT SCREW G11-08-16U (2) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 4 BULB GUSTOFSON 						READ-3		LIGHT-READING 170833-01-CHT SCREW SUPPLIED W/LIGHT CONNECTOR 58028-01-000 (2)				LIGHT,READING,HAL						LO1N3		LAMP 170693-08-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 1 BULB W/O SWITCH GUSTAFSON 								
FLUN1		LAMP 91936-04-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH THIN-LITE 																																												
FLUN2		LAMP 91936-03-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH THIN-LITE 																																												
FLUN3		LAMP 153464-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336																																												
FLUN4		LAMP 153464-03-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 480																																												
FLUN5		LAMP 153464-06-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 480																																												
FLUN6		LAMP 153464-04-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336																																												



87654321

DWG NO121339




ANTENNA ASM-PACKAGE

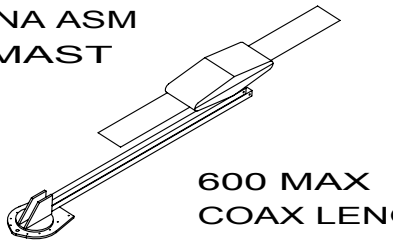NO	PART NUMBER	DESCRIPTION
ANT-1	ANTENNA 76319-24-000 HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) CLIP 80734-02-000	ROOF MOUNT TV ANTENNA ASM 25.5" MAST  600 MAX COAX LENGTH
ANT-2	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANT-2W	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA WEDGE 76319-26-000	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANTA-1	ANTENNA 158270-01-CHT BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-WINGMAN, ACCESSORY 173519-03-CHT	ROOF MOUNT TV ANTENNA ASM AUTOMATIC  600 MAX COAX LENGTH
ANT-3	ANTENNA-TV ROOF MNT.ROUND 167632-01-CHT PLATE-ROOF, CABLE ENTRY 146488-01-000 SCREW G67-10-129 (10) CABLE ASM-COAX 87105-01-006 ADAPTER 82134-01-000	ROOF MOUNT OMNI- DIRECTIONAL ANTENNA MOUNTING SCREWS SUPPLIED WITH ANTENNA 
ANT-4	ANTENNA 173519-01-CHT HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-HANDLE EXTENSION 173519-02-CHT	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH




ANTENNA ASM-PACKAGE

ANTEXT-1	CABLE ASM-EXTENS 77069-02-000	RADIO ANTENNA CABLE EXTENSION 2400MM USABLE LENGTH 
ANTKIT-1	ADAPTER-PLATE 76319-06-000 SCREW G11-08-08T (6) CLIP-WIRE 80734-02-000 SCREW G11-08-08T	PLATE ASM-ADAPTERS CABLE ROOF MOUNTING PLATE W/ CABLE-CABLE ADAPTER, FITTINGS, AND CABLE RETAINING CLIP 
ANT-R	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT ANTENNA 109889-04-000 BRACKET-ANTENNA GROUND 147741-01-CHT	ROOF MOUNT RADIO ANTENNA 
ANTEXT-2	CABLE ASM-EXTENS 77069-03-000	RADIO ANTENNA CABLE EXTENSION 6600 MM USABLE LENGTH
ANT-A	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT 76 MM 171825-01-000 (2) BRACKET-GROUND 147741-01-CHT NUT OMD01K-06-000 (2)	ROOF MOUNT RADIO ANTENNA THICK ROOF


SATELLITE DISH INSTL

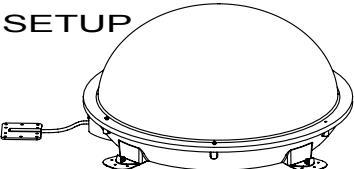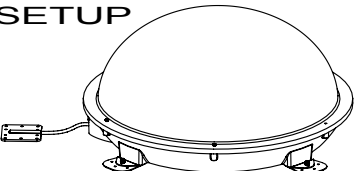DM-1	SATELLITE DISH 137135-02-000 SCREW G67-10-12B (8) PLATE & BRACKET (SUPPLIED) SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 
DA-1	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-1	SATELLITE DISH 154474-04-CHT SCREW G39-10-12B (12) PLATE 146488-01-000 SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM IN MOTION SETUP 


SATELLITE DISH INSTL

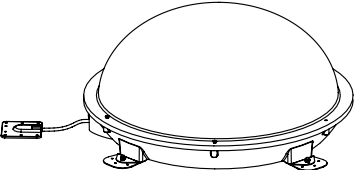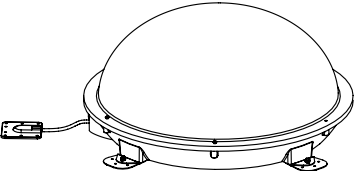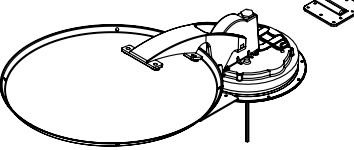DA-2	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-2	SATELLITE DISH 154474-04-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DM-2	SATELLITE DISH 137135-05-000 PLATE-ROOF,ENTRY (SUPPLIED WITH SATELLITE DISH) SCREW G67-10-12U (8) (FOR ROOF PLATE) SCREW G67-10-12U (10) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 

SENSORS

LPGD	LP GAS DETECTOR 150138-03-CHT SCREW G68-06-10U (2)	DETECTOR-LP GAS 
------	---	--

PANELS

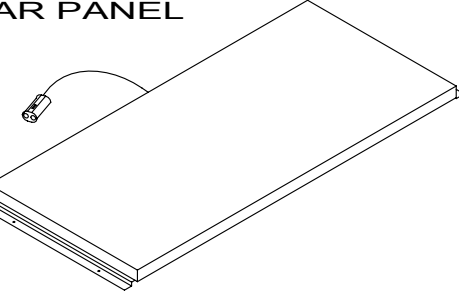SOLAR	PANEL-SOLAR 10 WATT 151647-01-000 (UP TO 03-14-10) 176161-01-000 (AFTER 03-15-10) SCREW G11-08-12U (4)	SOLAR PANEL 
-------	--	--

LEGEND

PART NUMBER

QUANTITY

PART NUMBER

QUANTITY

1

ADD BUMPER TO BOTTOM SIDE OF ANTENNA WINGS TO PREVENT DAMAGE TO ROOF.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL

SHEET 5

PART NO 121339

REV



87654321

2/17/2010



87654321

DWG NO121339






RECEPTACLE PACKAGE-GFI

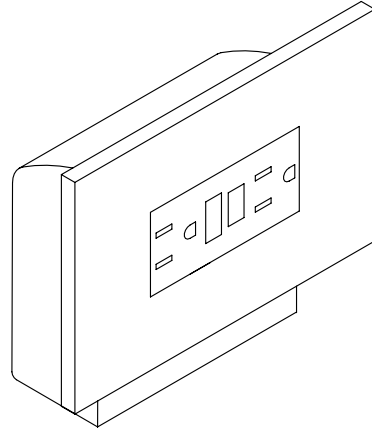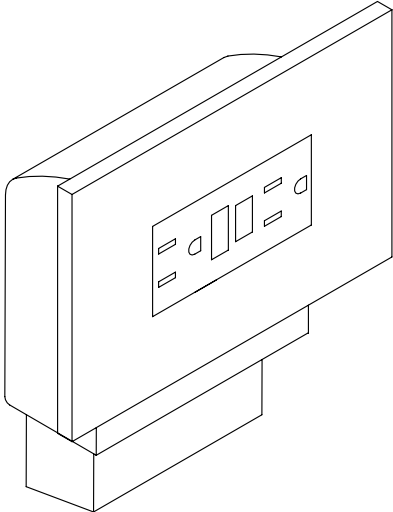NO	PART NUMBER	DESCRIPTION
<u>GFI</u> US	RECEPTACLE 163319-01-CHT BOX 91910-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI</u> CAN	RECEPTACLE 163319-01-CHT BOX 91910-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

RECEPTACLE PACKAGE-GFI

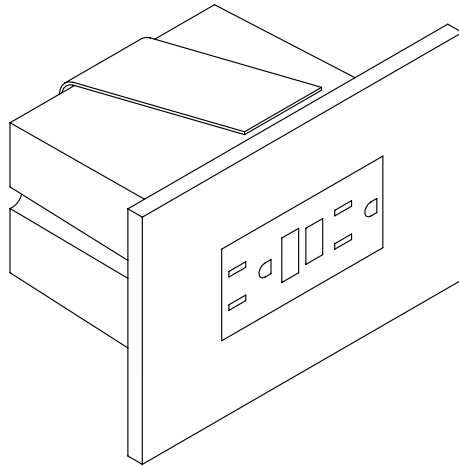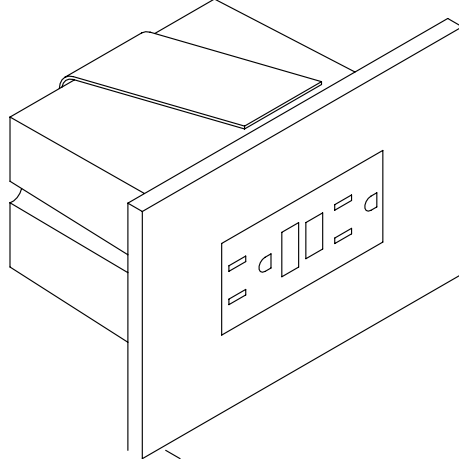
NO	PART NUMBER	DESCRIPTION
<u>GFI-1</u> US	RECEPTACLE 163319-01-CHT BOX 133070-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI-1</u> CAN	RECEPTACLE 163319-01-CHT BOX 133070-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

SPACERS

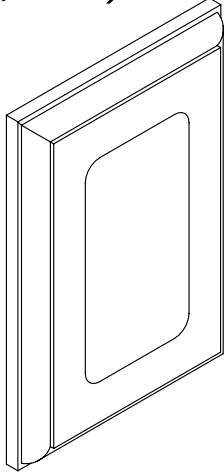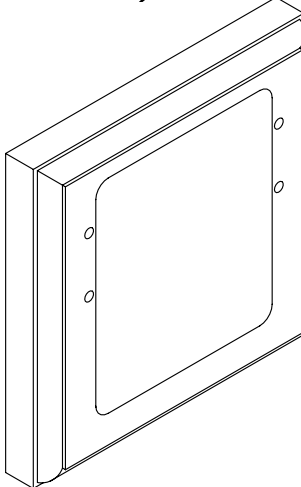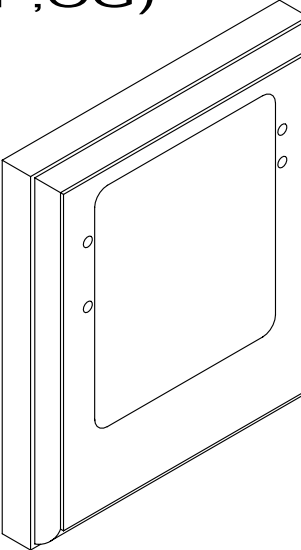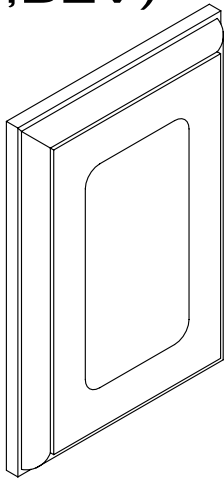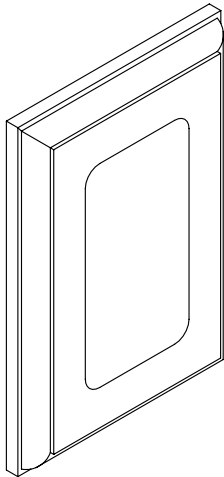NO	PART NUMBER	DESCRIPTION
SP-01	SPACER 102568-01-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,OG) 
SP-02	SPACER 102568-02-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (US) (WOOD,VYL RAP,OG) 
SP-03	SPACER 102568-03-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (CANADA) (WOOD,VYL RAP,OG) 
SP-04	SPACER 133713-01-CHT	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,BEV) 
SP-05	SPACER 133713-20-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,BEV) 

SP-21

SPACER
126052-01-XXX

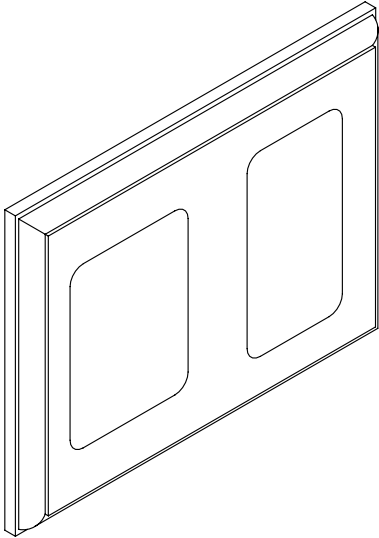WOOD SPACER FOR 1 - 110V
RECEPTACLE AND 1 - REAR TV
(12V) JACK
(WOOD,BEV)


LEGEND

MISC.	SPACER
PART NUMBER LISTING XXXX XXX	XXXX PART NUMBER

NOTES:

1

APPLY TUBING TO BARE GROUND WIRES.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 6

PART NO121339

REV

2/17/2010

87654321

D

C



B

A


1

DWG NO121339


PREP-A/C, RECESSED (W/OUT FACTORY A/C)

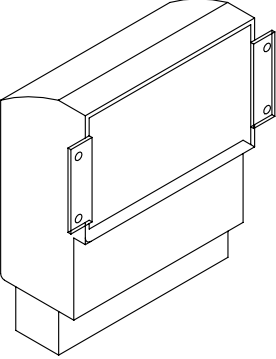NO	PART NUMBER	DESCRIPTION
PREP A/C-US	BOX 91910-02-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). US APPLICATION (RECESSED IN ROOF) 
PREP A/C-CAN	BOX 91910-01-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). CANADA APPLICATION (RECESSED IN ROOF) 


CONNECTION BOX-POWER CORD

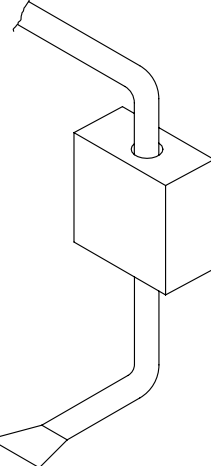NO	PART NUMBER	DESCRIPTION
J-PC 30	BOX 8289-01-000 COVER 53337-01-000 LABEL 91243-01-000 WIRE-BONDING 8019-01-000 SCREW G11-08-12B (2) TERMINAL 8328-01-000 CONNECTOR 8313-01-000 (2) CONNECTOR 8311-01-000	CONNECTION BOX IN POWER CORD COMPT FOR POWER CORD (US & CA APPLICATION) 


CONNECTION BOX-GENERATOR RECEPTACLE

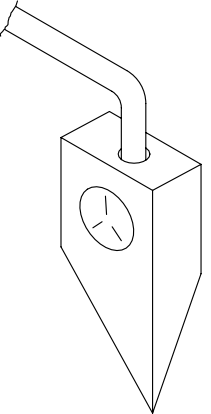NO	PART NUMBER	DESCRIPTION
J-RCP 30	BOX 8289-01-000 RECEPTACLE 24924-02-000 COVER 69238-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 133678-04-000 CONNECTOR 8314-01-000 TUBING-VINYL 8041-02-000 (150MM)	CONNECTION BOX IN POWER CORD COMPT FOR THE GENERATOR RECEPTACLE (US & CA APPLICATION) 

CONNECTION BOX, GENERATOR SERVICE FEED

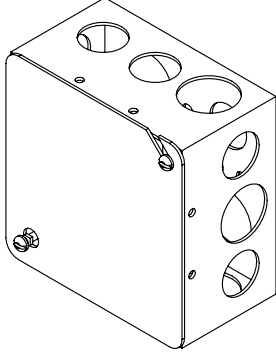NO	PART NUMBER	DESCRIPTION
J-GEN 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 WIRE NUT-GREY 8314-01-000 (3) CONNECTOR-WIRE 8356-01-000	BOX AND EQUIPMENT USED FOR CONNECTING THE GENERATOR LEADS TO THE SERVICE ENTRANCE WIRES (US & CA APPLICATION) 

PREP-A/C, SURFACE (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP SURF	BOX 93603-01-000 COVER 53337-01-000 LABEL 91243-01-000 WIRE-BONDING 8019-01-000 SCREW G11-08-12B (2) TERMINAL 8328-01-000 CONNECTOR 8313-01-000 (2) CONNECTOR 8311-01-000	SURFACE MOUNT, US AND CANADA, BOX AND EQUIPMENT FOR A/C PREP (W/OUT FACTORY A/C). TYPICALLY LOCATED ON OVERHEAD CABINET INNER WALL OR ON CEILING. 

LEGEND

PART NUMBER

LISTING

XXXX

XX

NOTES:

1 APPLY TUBING TO BARE GROUND WIRES.

96 MH'S

DO NOT SCALE DRAWING



TITLE: PART LISTING-ELECTRICAL

SHEET 7PART NO121339REV

87654321

↑

2/17/2010

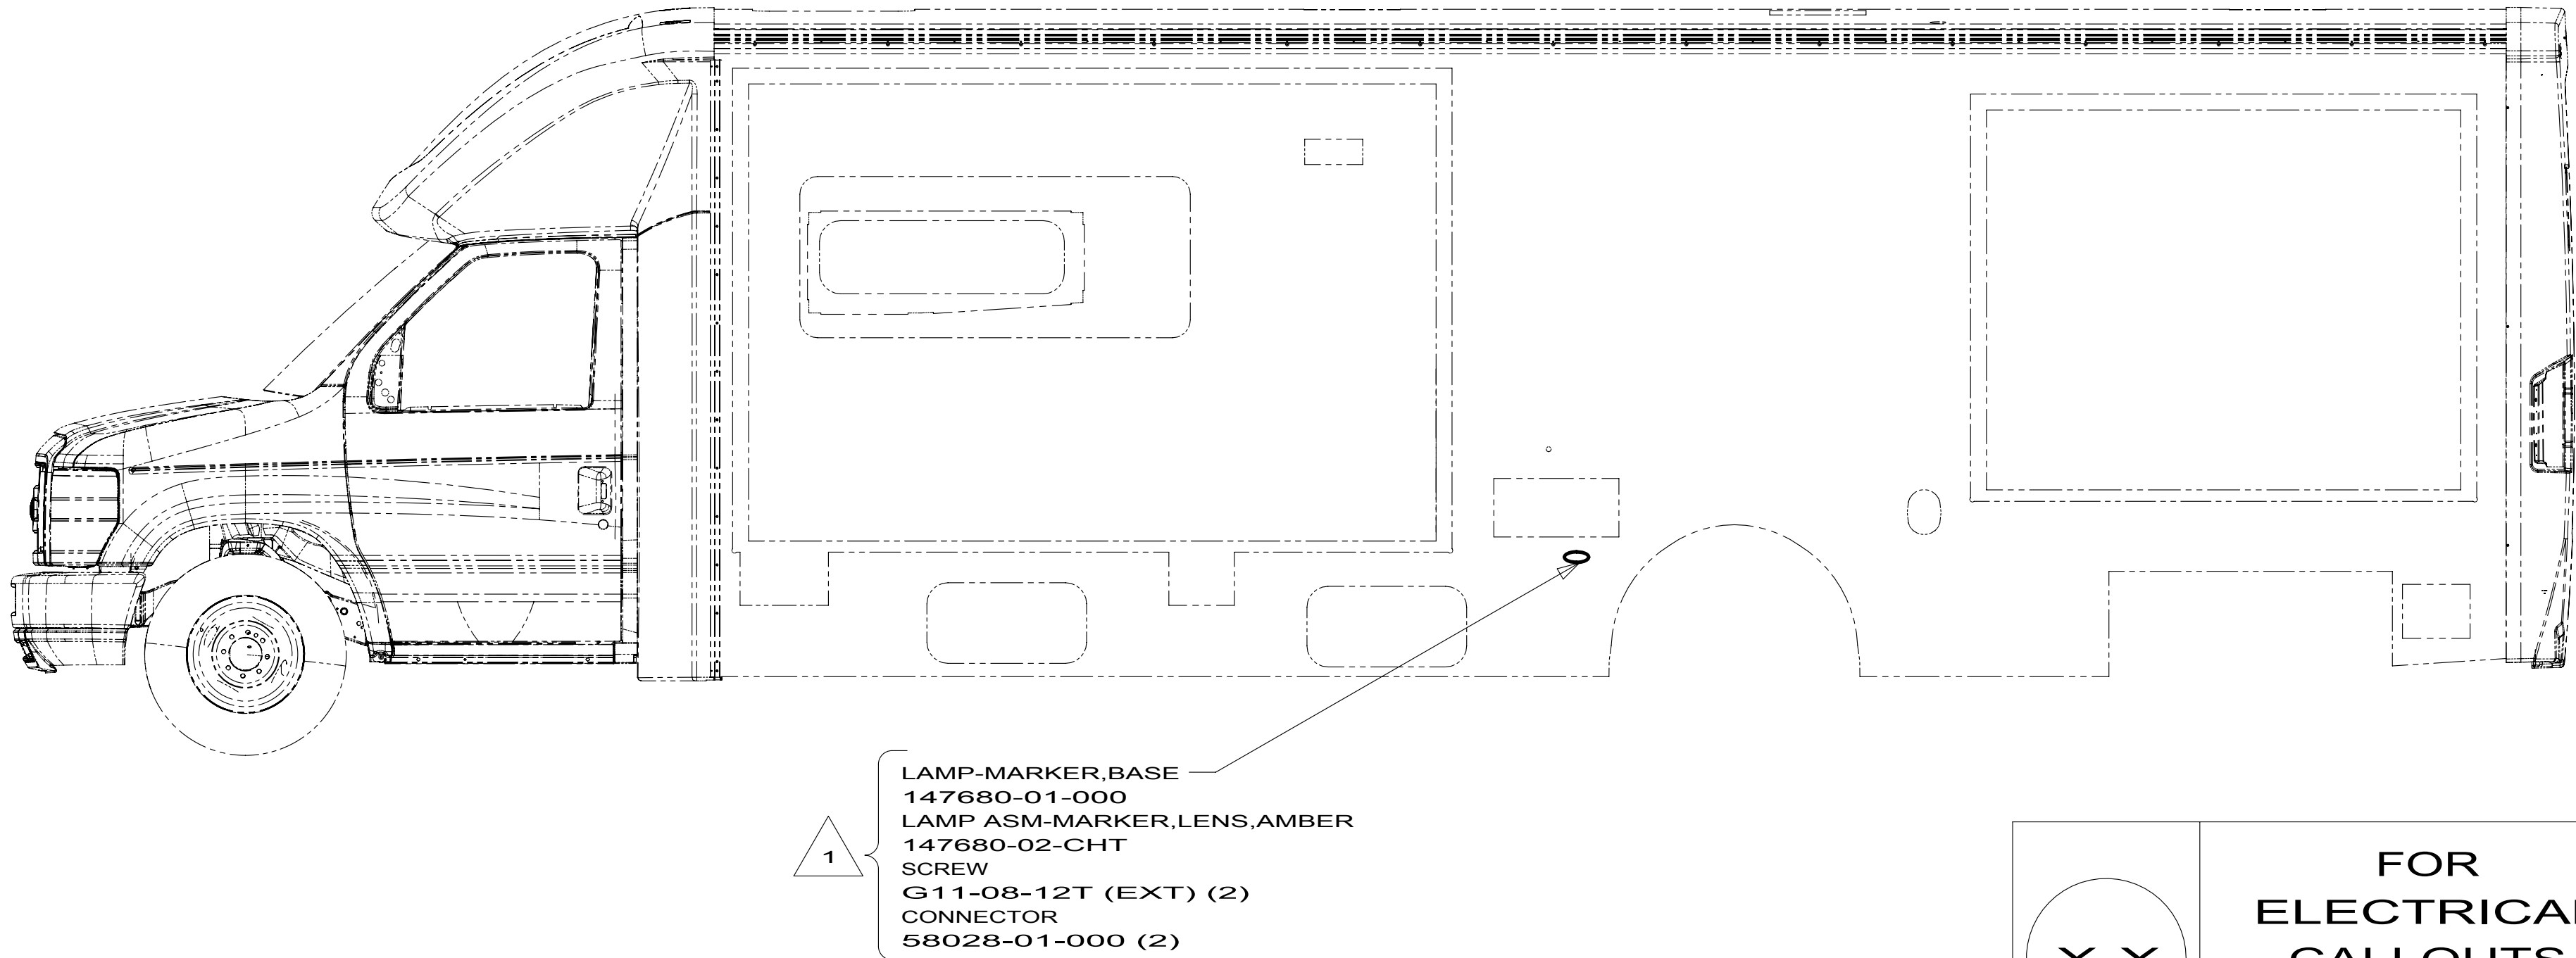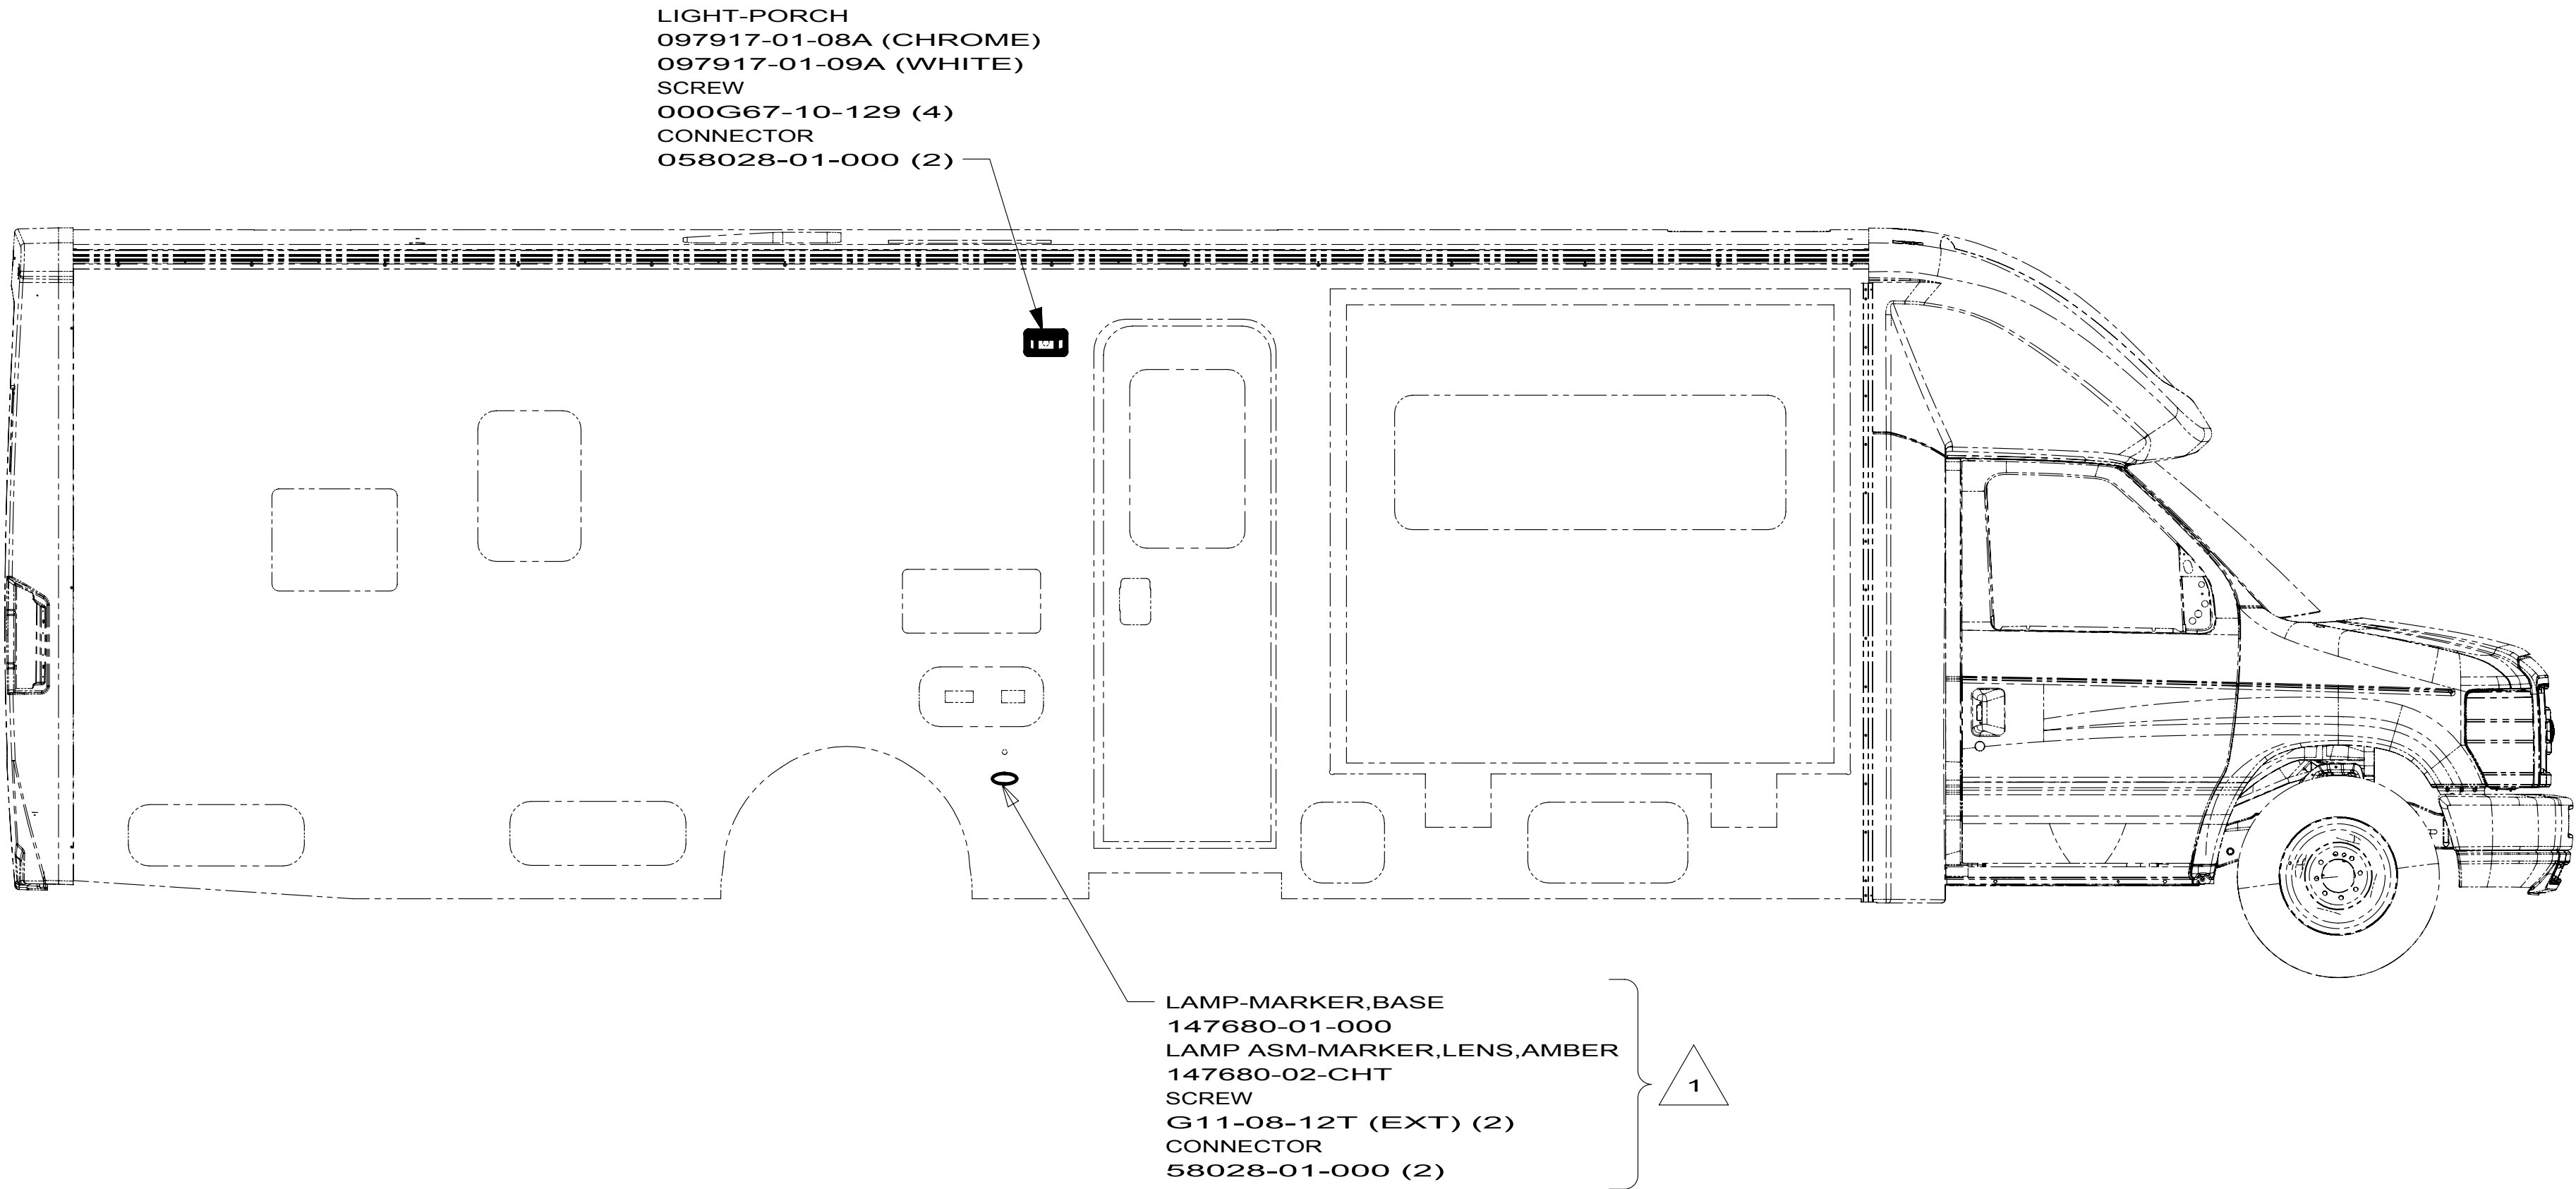

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000



10 700 SERIES

WIRING INSTL-EXTERIOR LAMPS

1 2 171948

1 USED ON 730C ONLY.

NOTES:

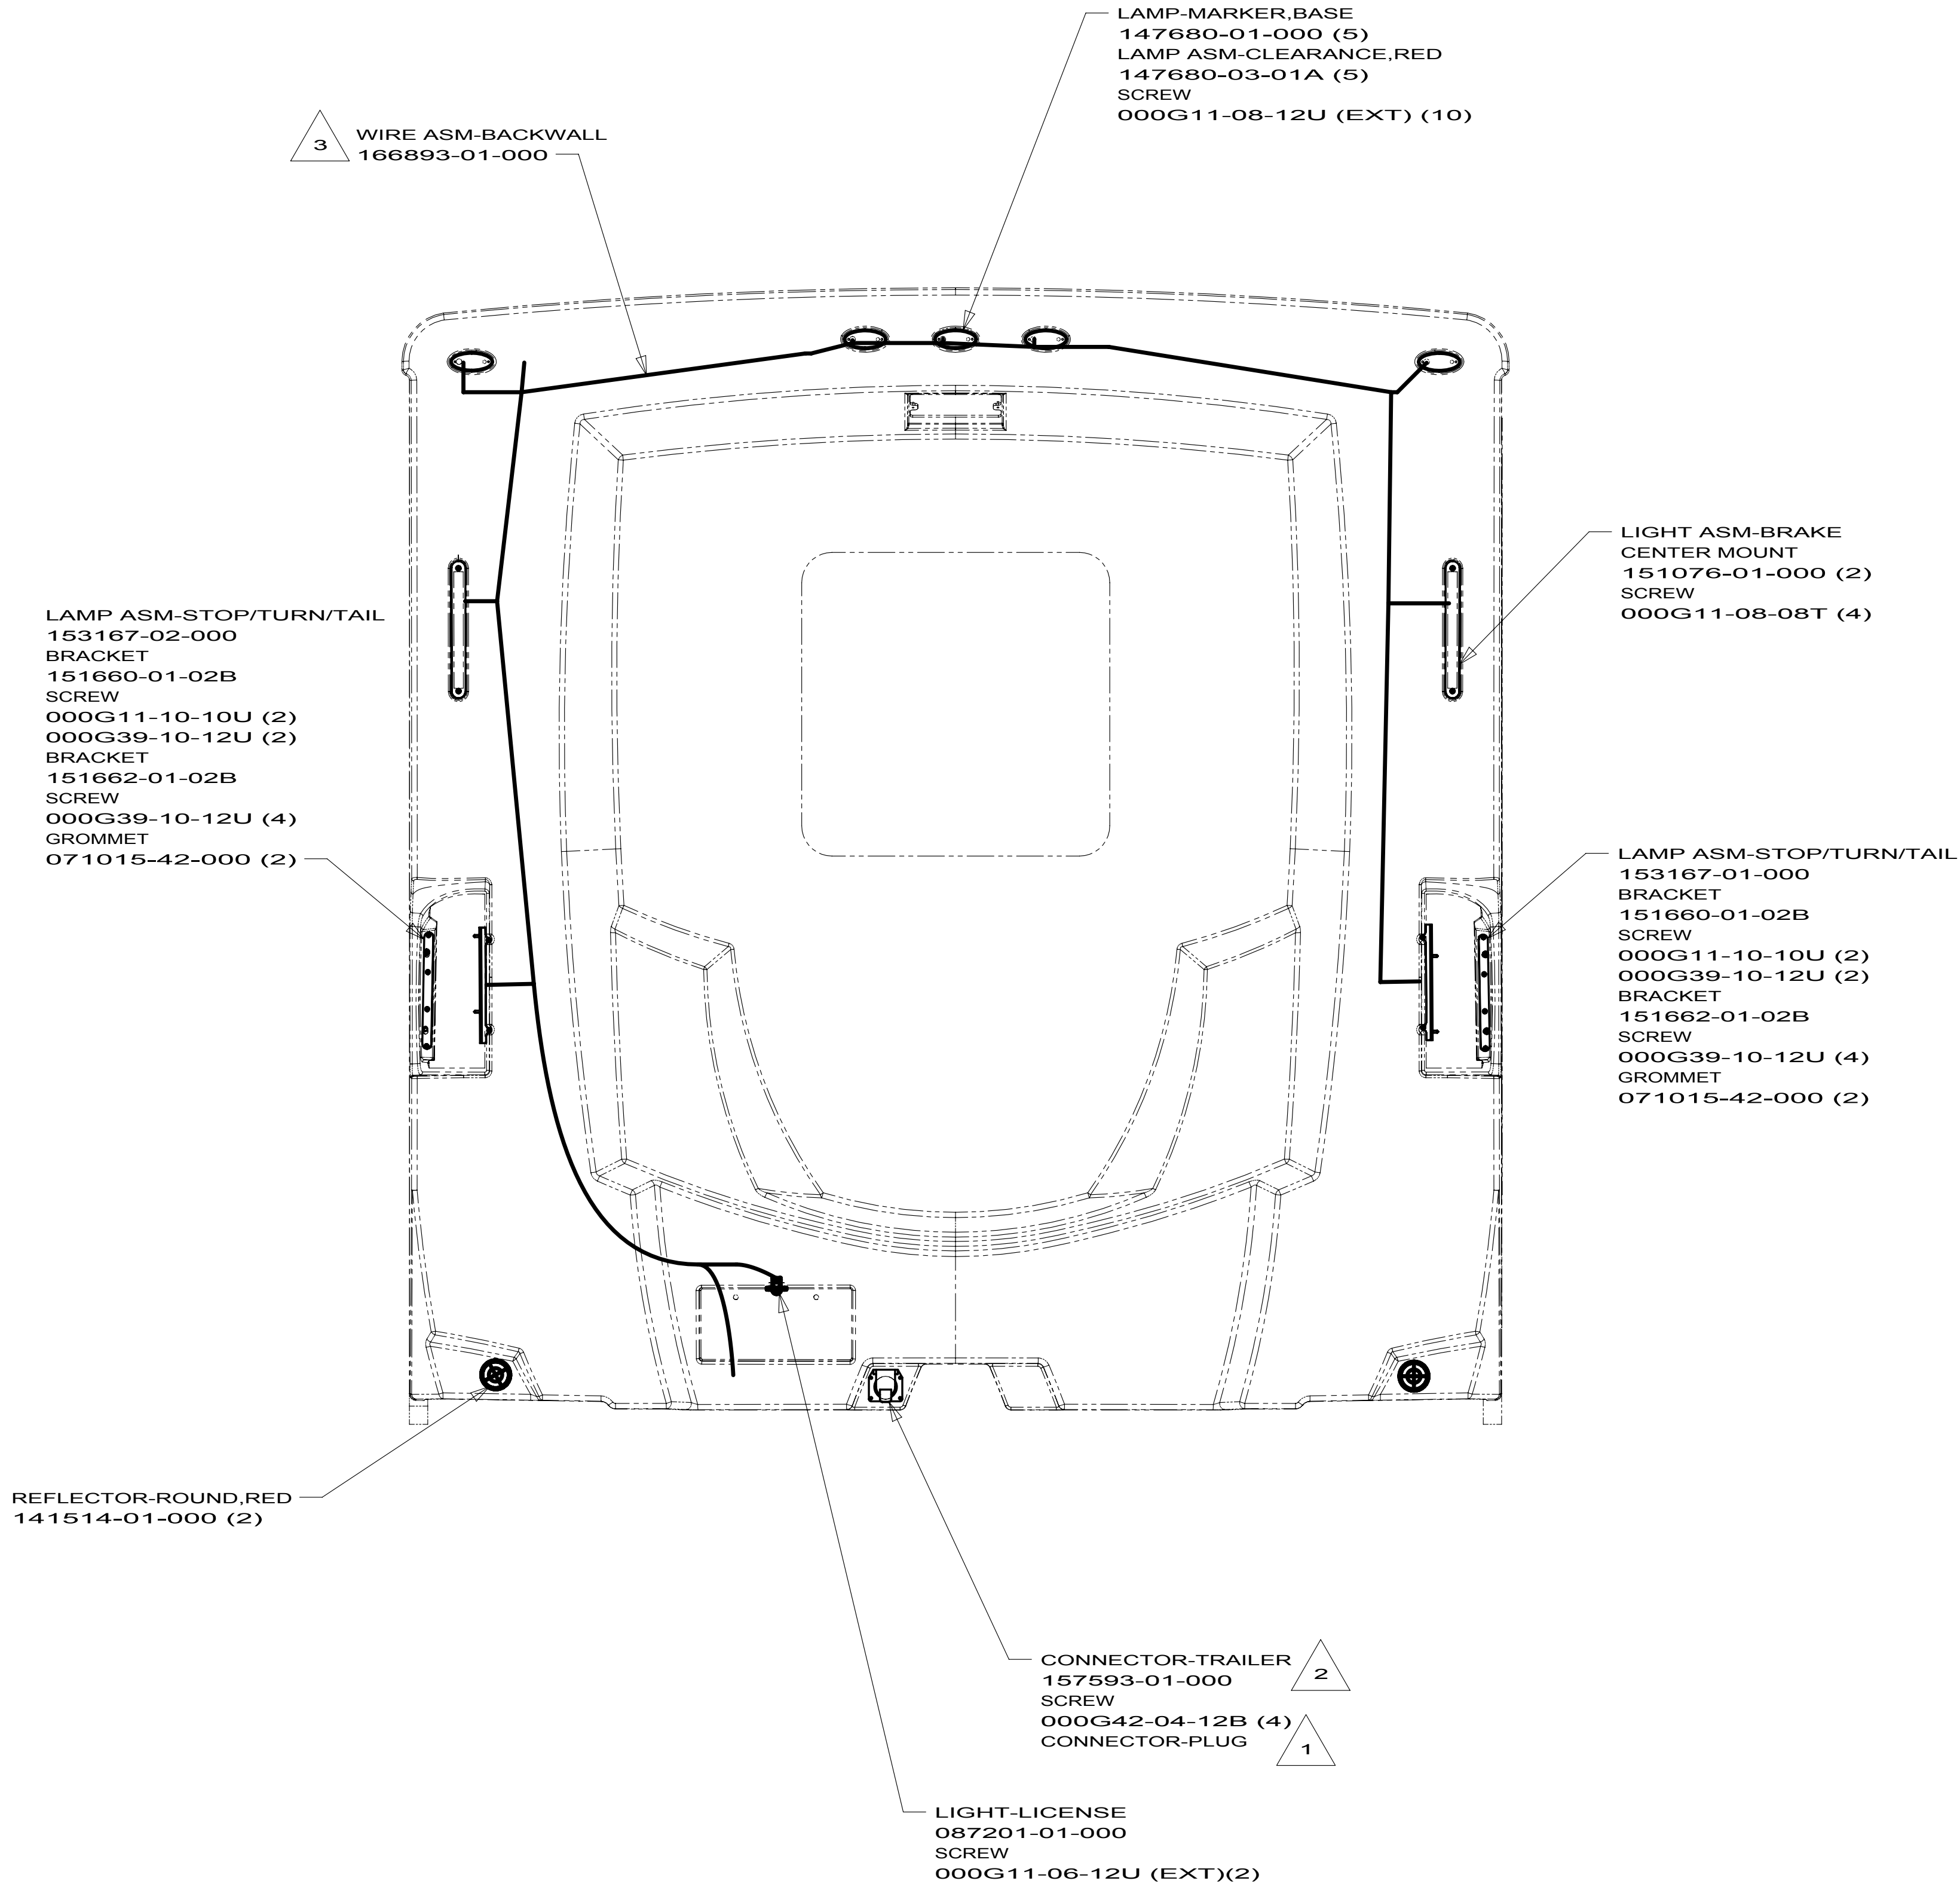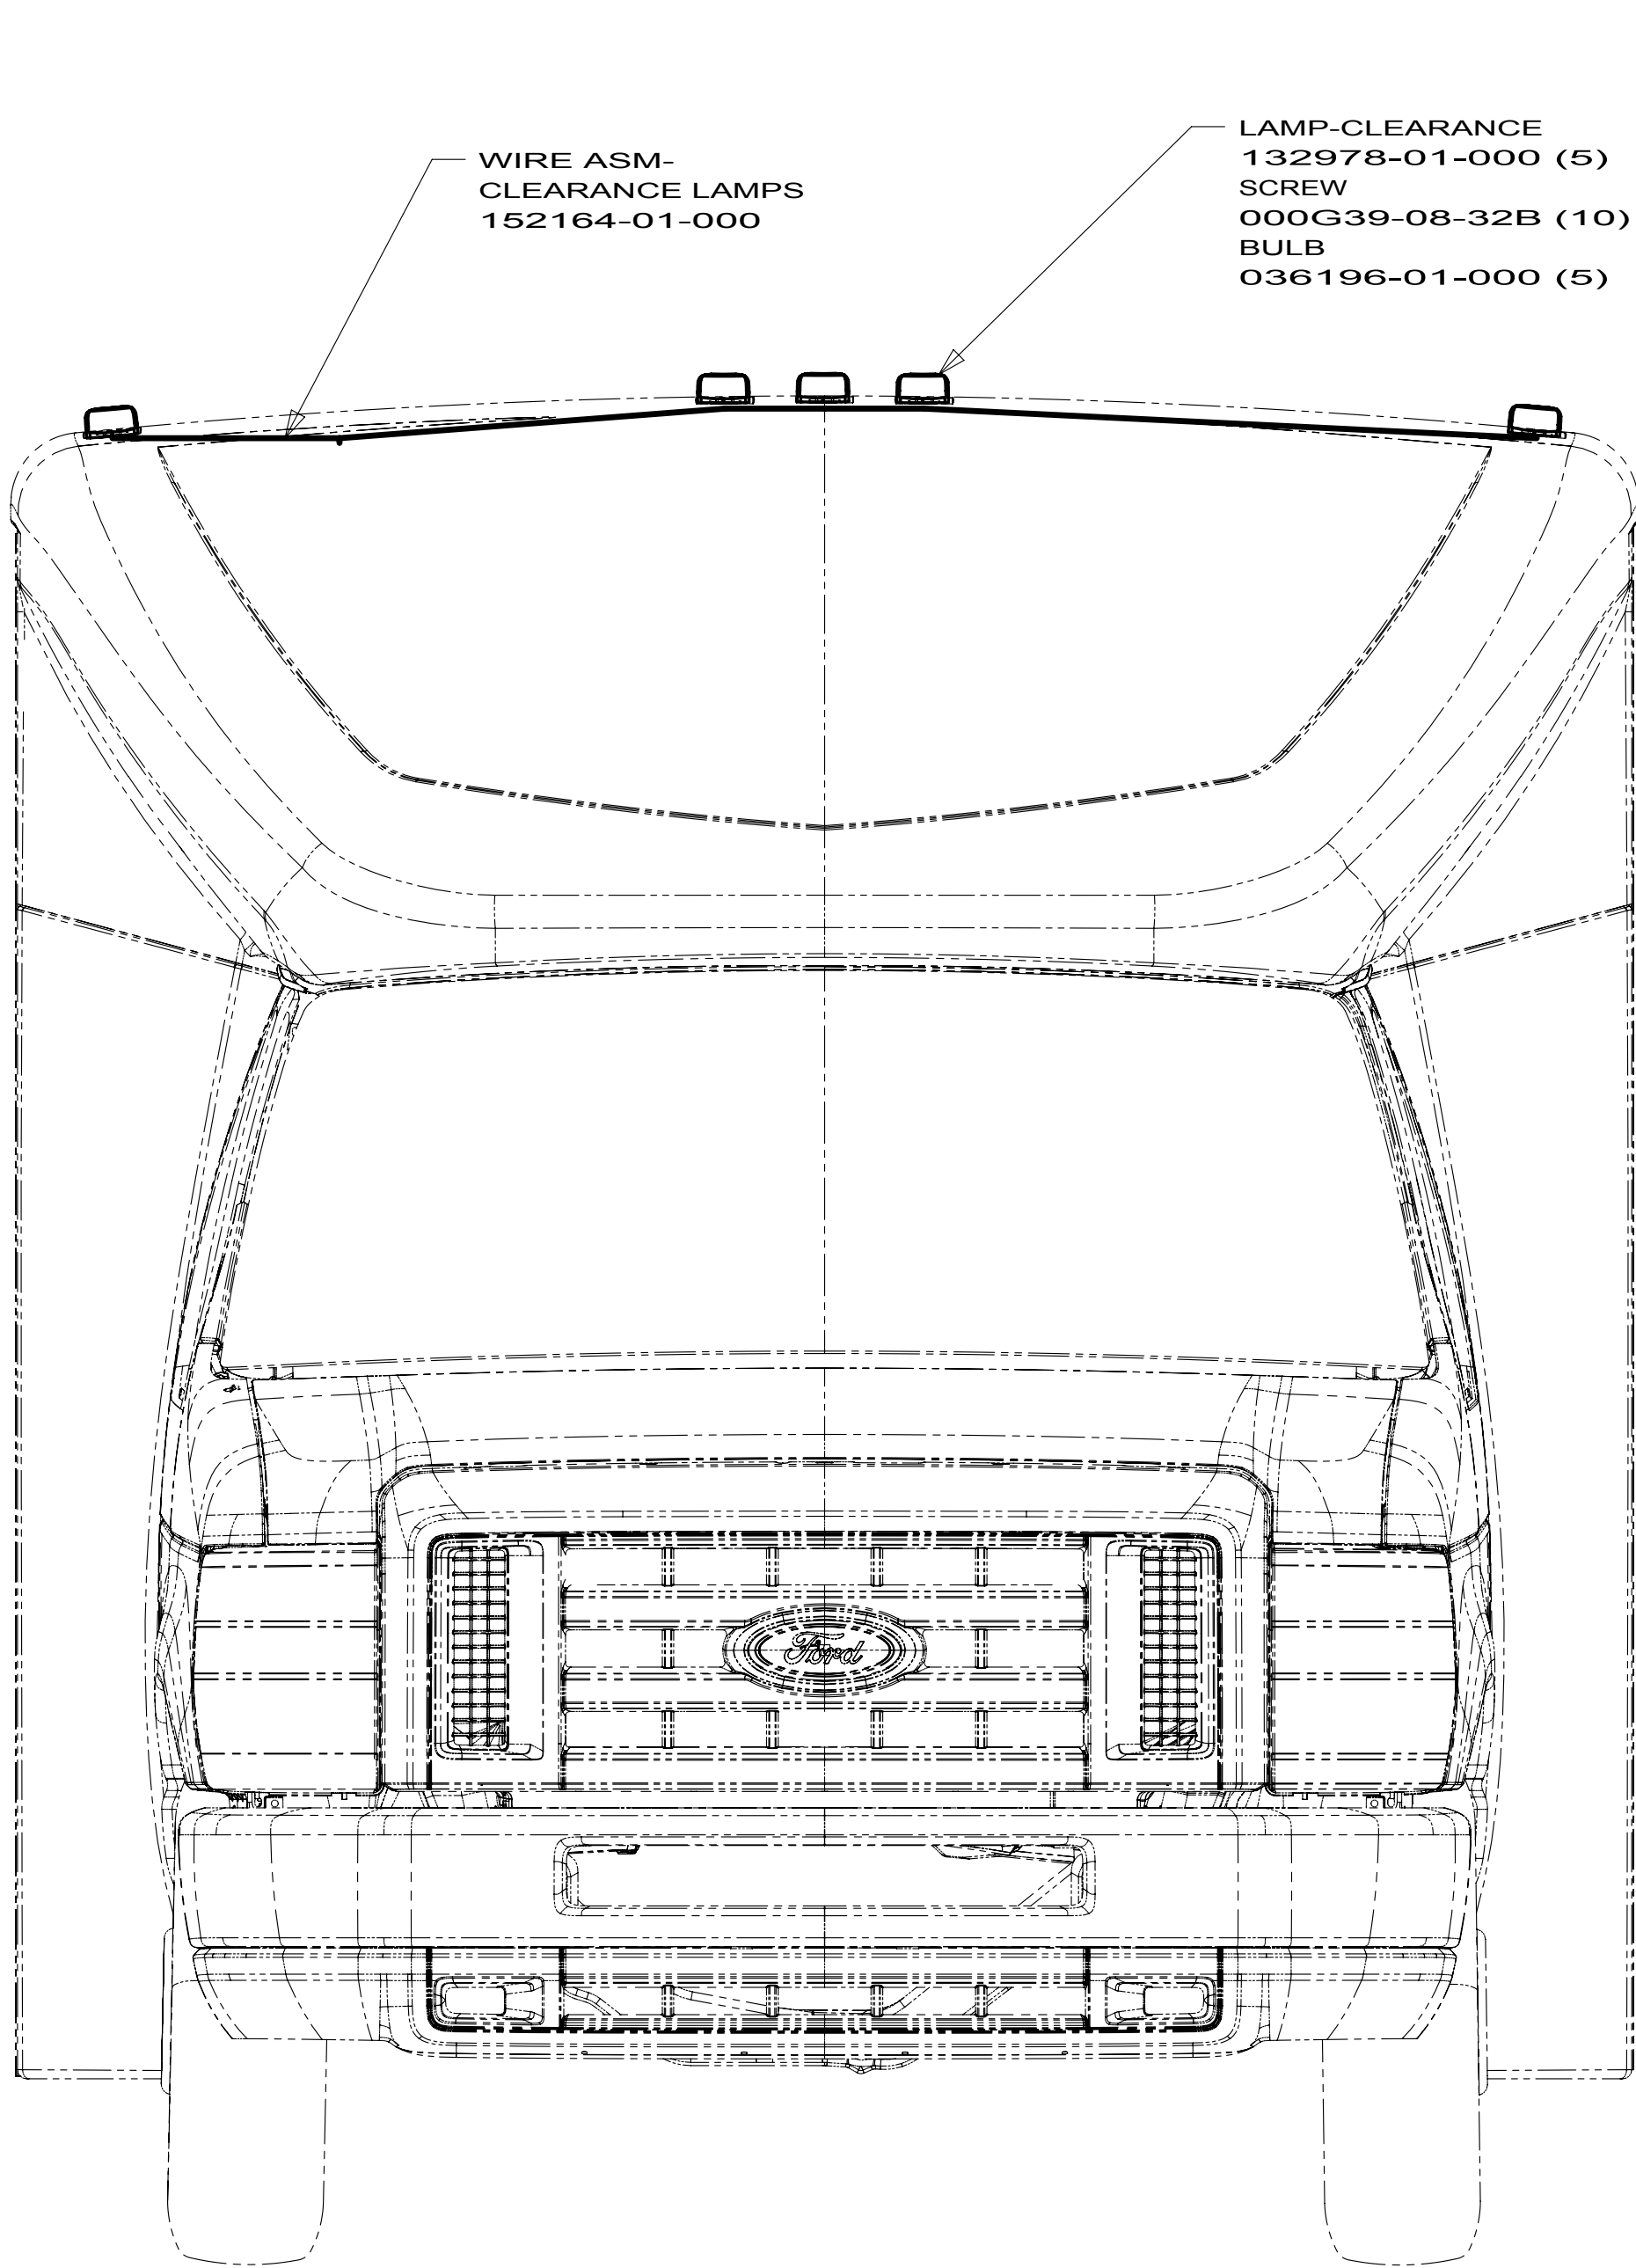

- 3 LOCATED IN REAR CAP.
- 2 SECURE WIRE BELOW COACH WITH CLAMP
010495-01-000 AND SCREW 000G67-10-12B.
- 1 CONNECTOR-PLUG, TRAILER 146246-01-000 TO BE SUPPLIED
LOOSE IN COACH WITH TRAILER TOW PACKAGE.

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

10 700 SERIES

WIRING INSTL-EXTERIOR LAMPS


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

KEY	PART NUMBER	U/M	DESCRIPTION
	097917-01-700	EA	LENS-LIGHT, CLEAR

097917-01-08A/09A
VENDOR NO.
30-78-021

300-Series
700-Series
169847-02

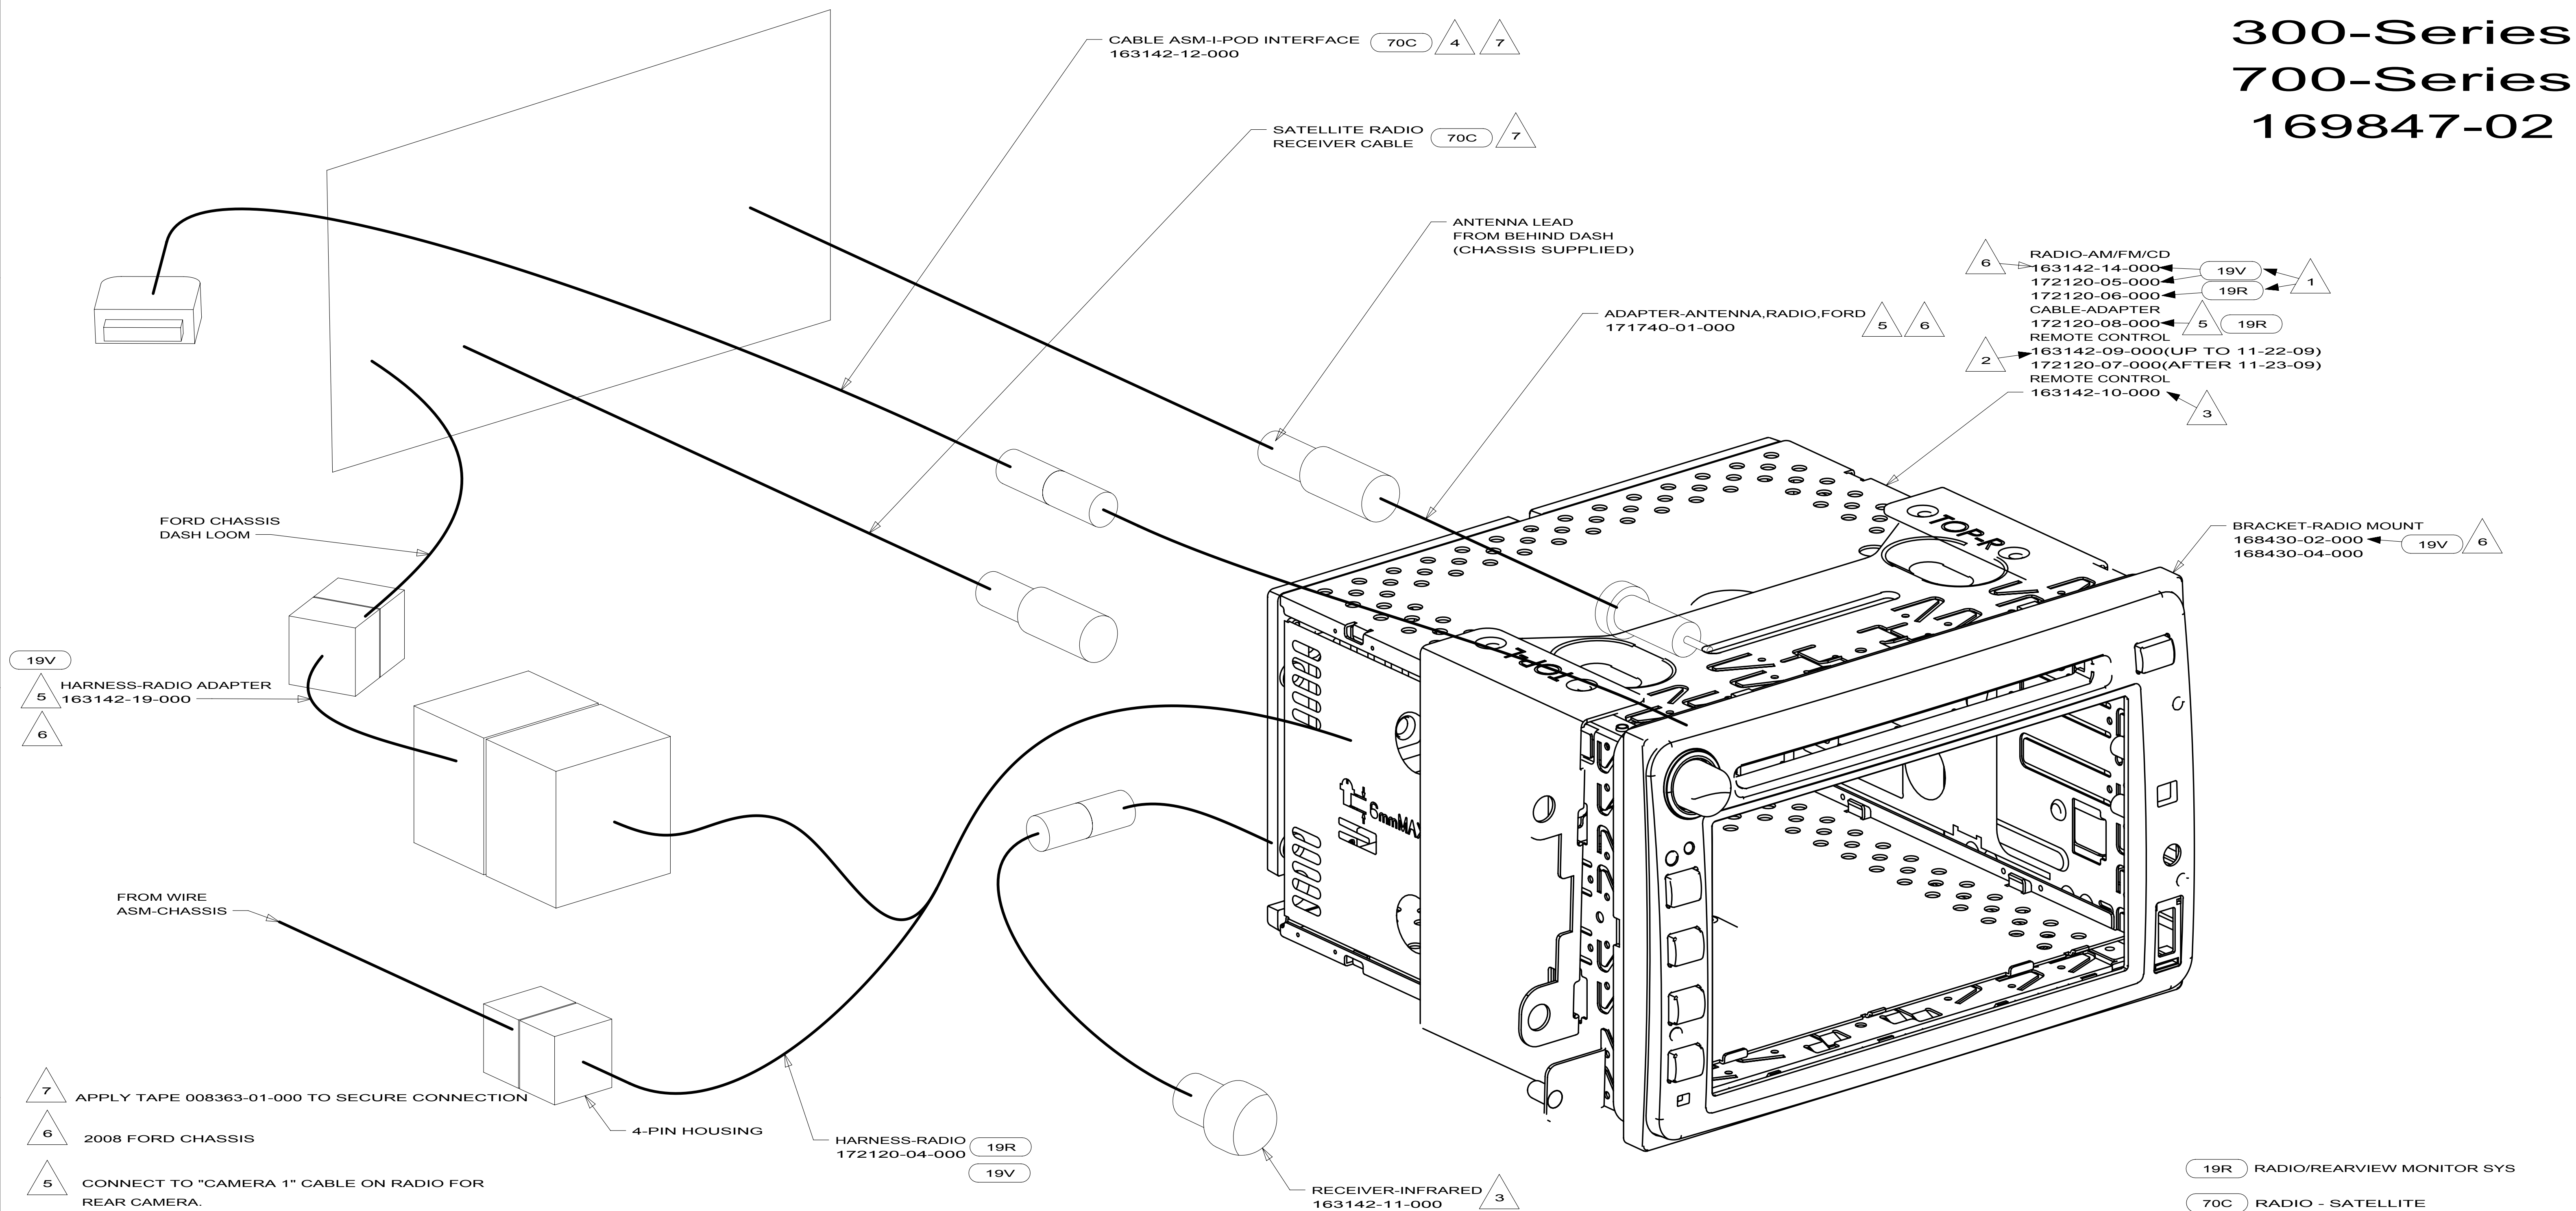


- NOTES:
- 7 APPLY TAPE 008363-01-000 TO SECURE CONNECTION
 - 6 2008 FORD CHASSIS
 - 5 CONNECT TO "CAMERA 1" CABLE ON RADIO FOR REAR CAMERA.
 - 4 PLUG I-POD CABLE INTO LEAD ON BACK OF RADIO MARKED 'I-POD'. ROUTE CABLE TO THE LEFT OF RADIO. WIRE TIE EXCESS CABLE UNDER DASH IN THE AREA LEFT OF THE RADIO. LEAVE 200 MM OF CABLE IN THE MOTOR COVER BEVERAGE TRAY. MAKE SURE CABLE DOES NOT GET PINCHED BY MOTOR COVER.
 - 3 INSTALL PER DRAWING 170205.
 - 2 TO BE SUPPLIED LOOSE IN WINNEBAGO OWNERS CASE.
 - 1 ENGAGE T-RAIL ON BOTTOM OF RADIO UNTIL LOCKED IN PLACE.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

19R	RADIO/REARVIEW MONITOR SYS
70C	RADIO - SATELLITE
19V	RADIO-AM/FM STEREO CD PLAYER
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265
FIRST USED	
300,700-SERIES	
DO NOT SCALE DRAWING	
TITLE:	
RADIO INSTL	
SHEET 2	PART NO 169847 REV

728B/730C

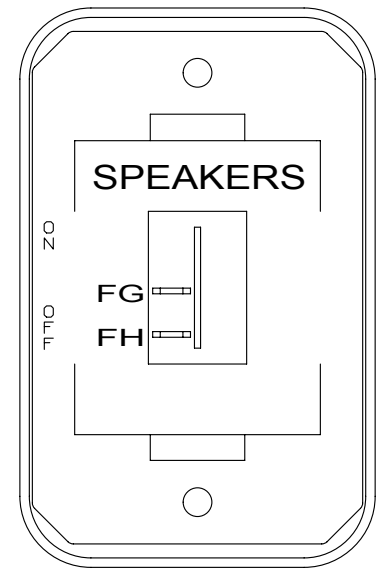

DETAIL AC

SWITCH-ROCKER
135740-01-01A (AFTER 06-01-09)
SWITCH-BASE
135741-01-01A (AFTER 06-01-09)
SWITCH-BEZEL
135742-60-02A (AFTER 06-01-09)
SCREW
000G11-08-08B (2) (AFTER 06-01-09)

CONVERTER-AUDIO OUTPUT
173726-01-000 (AFTER 06-01-09)

SPEAKER-ROUND
160867-01-01A
SCREW
0G1208-12-170 (4)


RECEPTACLE-DUPLEX
172839-01-01A

SWITCH
DETAIL AC

VIDEO SWITCHER
168102-01-000 (UP TO 08-16-09)
168102-03-000 (AFTER 08-17-09)
BRACKET
156586-02-02B (UP TO 08-16-09)
156586-05-02B (AFTER 08-17-09)
TRIM RING
164740-02-02B (AFTER 08-17-09)
SCREW
000G11-08-12B (10)


SPEAKER-ROUND
160868-01-01A
GRILLE
160868-02-01A
SCREW
000G11-08-08B (4)

571
SPEAKER
110465-01-000
SCREW
049465-03-000 (4)

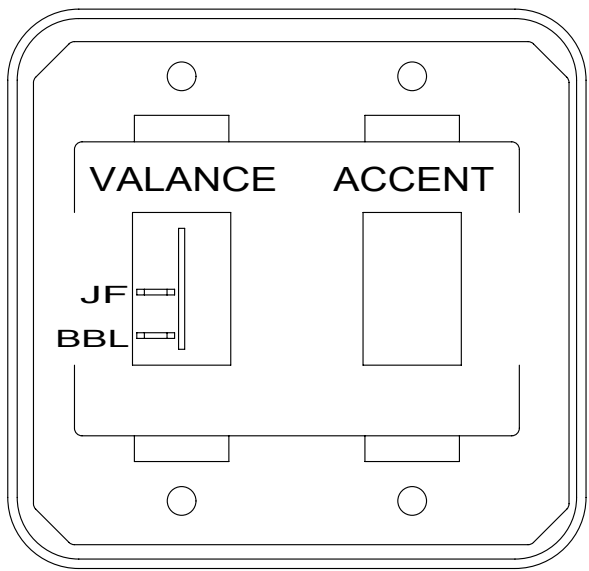

DETAIL AB

SWITCH-ROCKER
135740-01-01A
SWITCH-BLANK
138253-01-02A
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-36-02A
SCREW
000G11-08-08B (4)

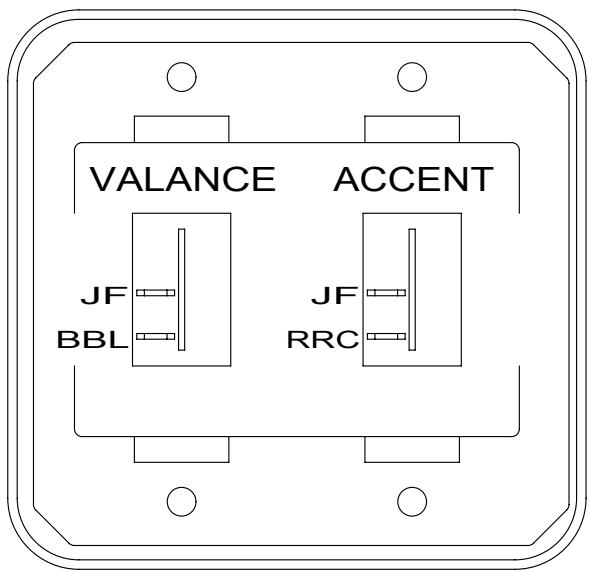

DETAIL AB 086

SWITCH-ROCKER
135740-01-01A (2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-36-02A
SCREW
000G11-08-08B (4)

PLATE-SAT PREP
149557-04-02A
SCREW
000G67-10-08B (2)

RECEPTACLE-DUPLEX
172839-01-01A (UP TO 01-24-10)
176149-01-01A (AFTER 01-25-10)
COVER-RECEPTACLE,SNAP
176159-01-01A (AFTER 01-25-10)

SPEAKER-ROUND
160868-01-01A
GRILLE
160868-02-01A
SCREW
000G11-08-08B (4)

3 48R SWITCH-CONTROL PANEL
IN MOTION SATELLITE

571 SPEAKER
110465-01-000
SCREW
049465-03-000 (4)

48R CONTROL-IN MOTION SATELLITE
FASTENER-DUAL LOCK
085774-01-000(2-150MM)
(FASTEN TO CARPETED PANEL)

LIGHT-HALOGEN,ROUND
165170-01-01A (2)
SCREW
000G13-06-12B 4)
CONNECTOR
058028-01-000 (4)

1JM HOME THEATER
164270-01-000 (UP TO 05-31-09)
173514-01-000 (AFTER 06-01-09, UP TO 08-16-09)
173514-02-000 (AFTER 08-17-09)
WIRE ASM-JUMPER
153349-11-000
FASTENER-DUAL LOCK
085774-01-000 (2-300MM)
085774-02-000 (2-300MM)

086 2
LAMP-ROPE
160259-01-066
(CUT LENGTH OF 66 INCHES)
SILICONE-SEALANT
131264-05-02A
CONNECTOR-LIGHT
146514-02-000
LIGHT-FLEX,ROUND
146514-03-000

086 2
LAMP-ROPE
160259-02-066
(CUT LENGTH OF
66 INCHES)
SILICONE-SEALANT
131264-05-02A
CONNECTOR-LIGHT
146514-02-000
LIGHT-FLEX,ROUND
146514-03-000

TV-LCD 26"
171727-01-000
SCREW
OMC04K-05-016 (4)
(MAIN TV SUPPORT)
SCREW
OMG02B-04-016 (2)
(LOWER TV SUPPORT)
WASHER
000E14-10-00B (6)

5. ALL WIRES TO BE SECURED WITH CLAMP 010495-01-000 OR CLIP 080734-01-000 EVERY 600MM. USE SCREW 000G67-10-12B UNLESS OTHERWISE SPECIFIED.

4. 110V WIRE TO BE CLAMPED WITH CLAMP 010497-05-000 WITHIN 200MM OF OUTLET BOXES. USE SCREW 000G67-10-12B.

3 PARTS ARE SUPPLIED WITH SATELLITE KIT 154474-02-000.

2 STAPLE ROPE LAMP TO CABINET EVERY 150MM SO THAT ROPE LAMP FOLLOWS CONTOUR OF CABINET.

1. SEE WIRING INSTL-BODY,12 & 110V FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

10 700-SERIES


X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

WIRING INSTL-TV/DVD

1 4 172029

(UP TO 05-31-09)
728B/730C

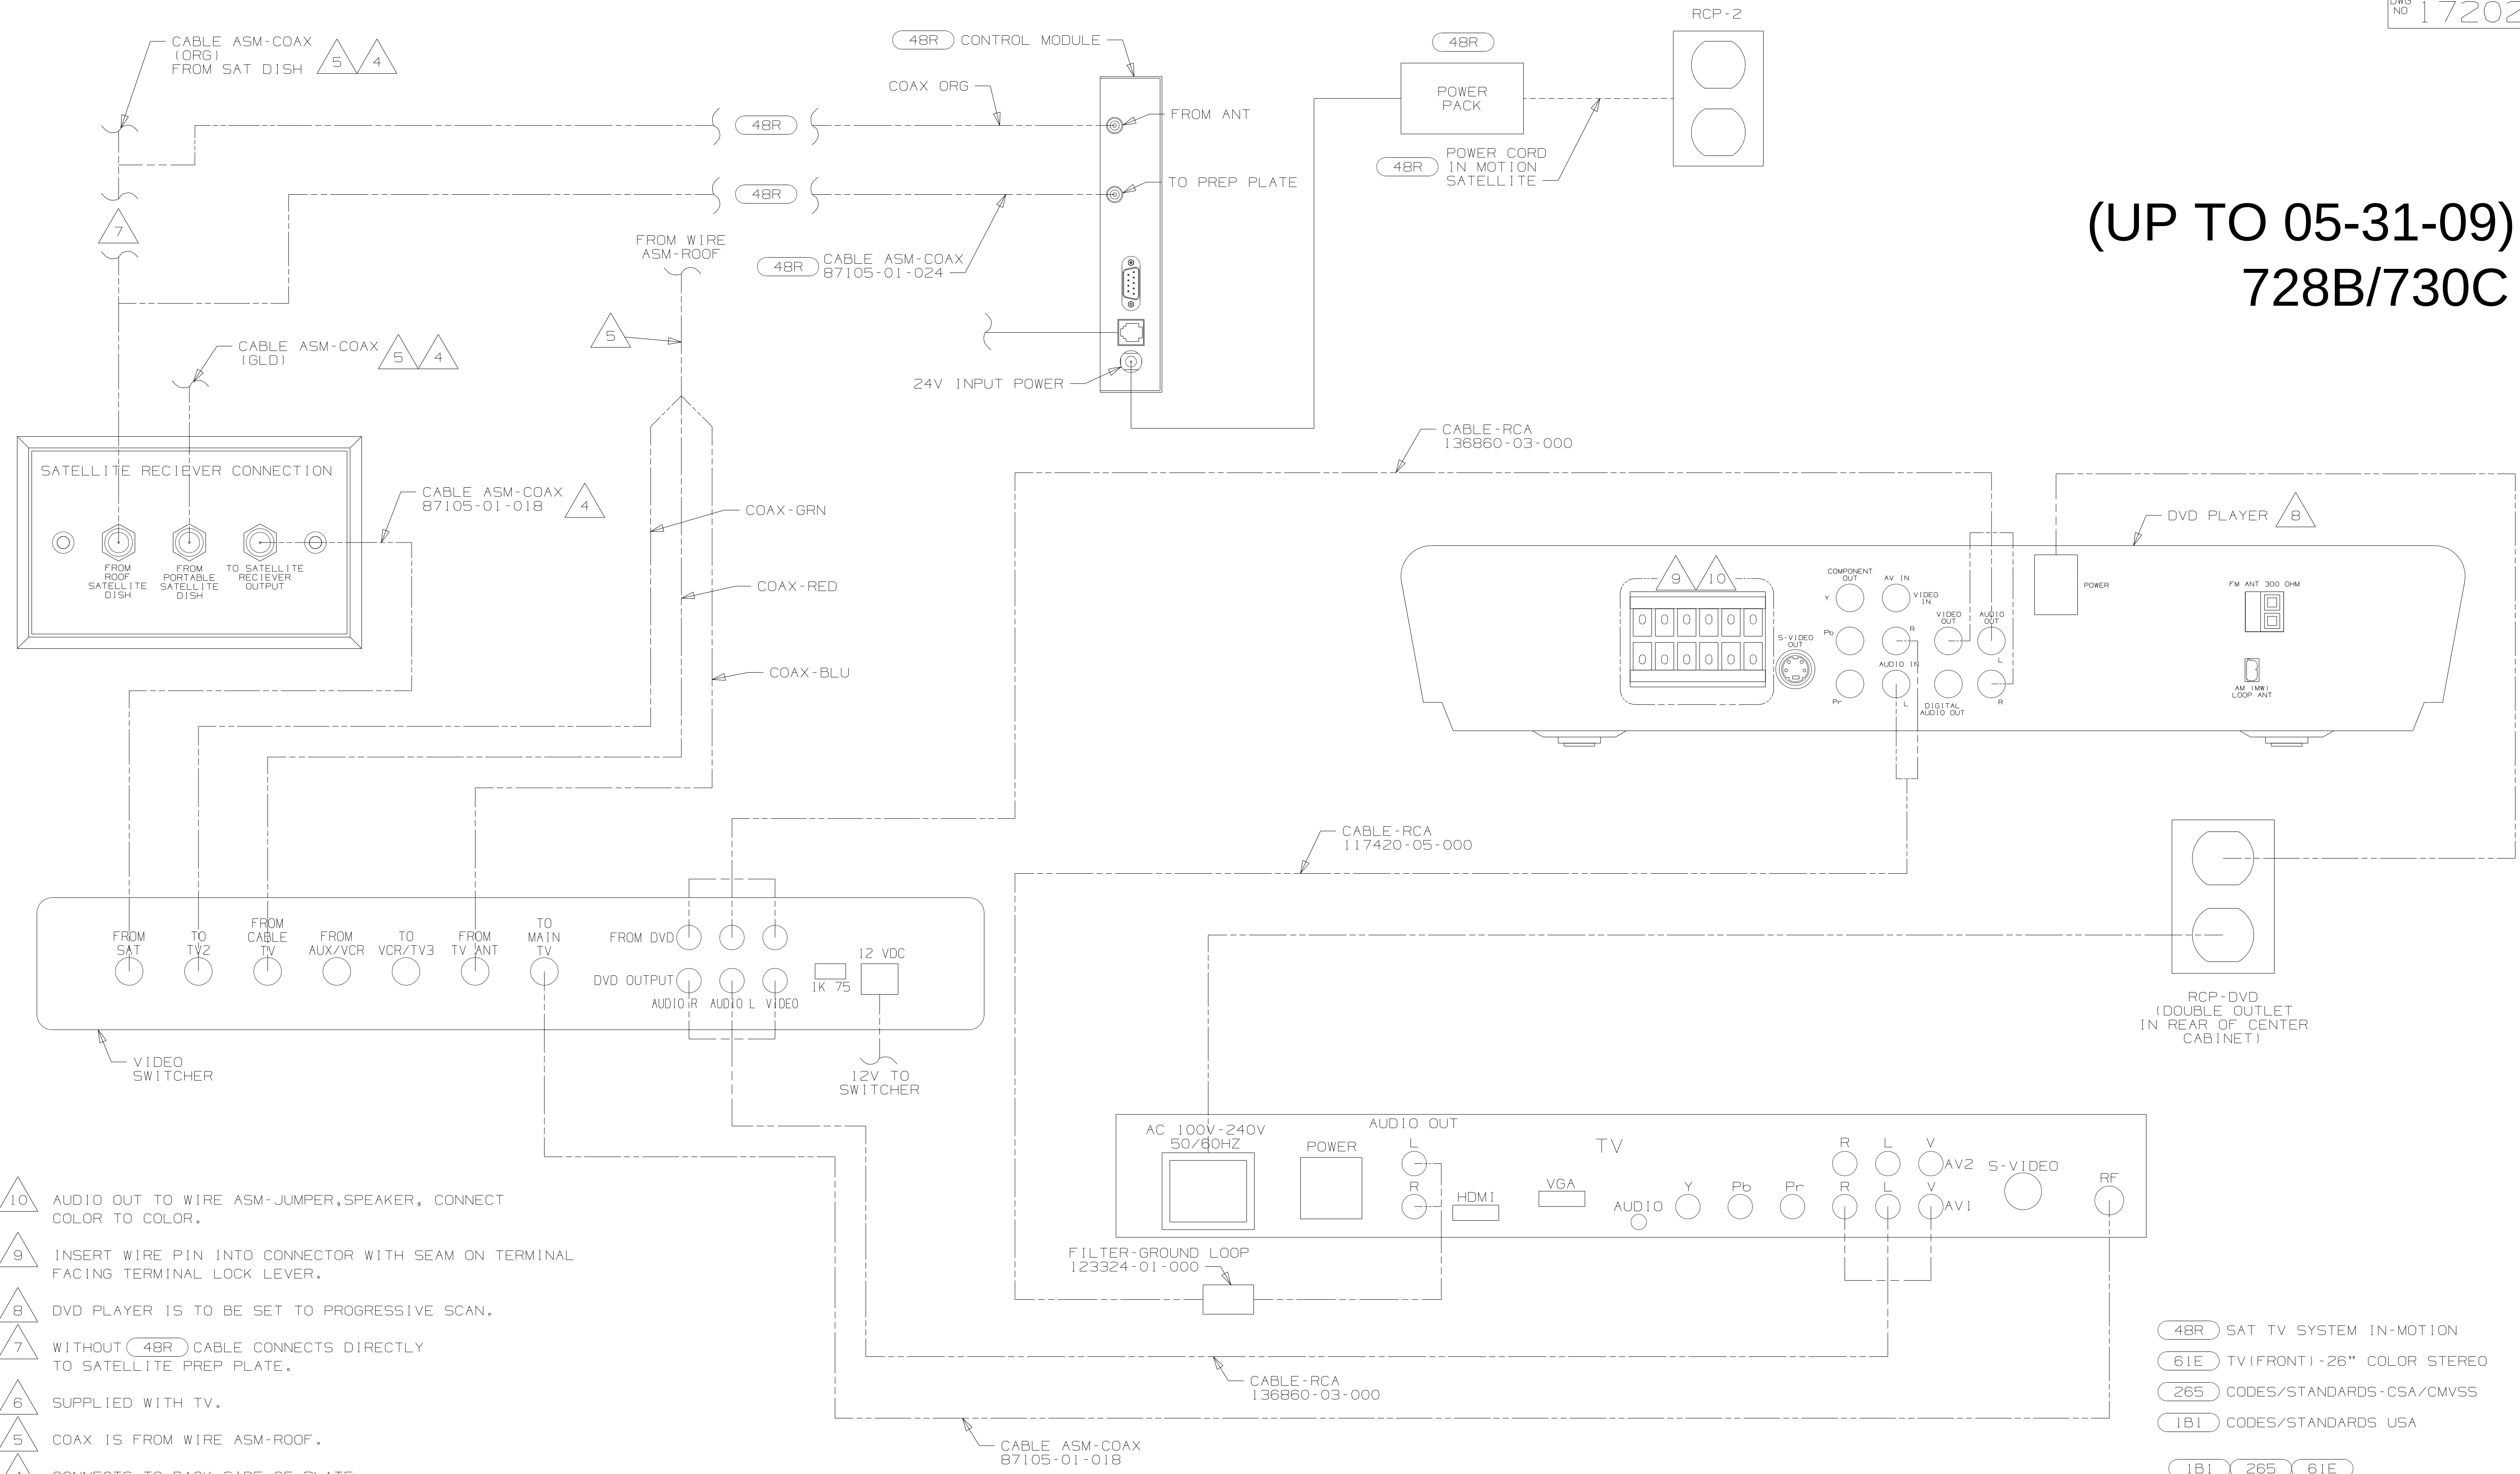

- 48R SAT TV SYSTEM IN-MOTION
- 61E TV (FRONT) - 26" COLOR STEREO
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 61E


FIRST USED 10 700-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-TV/DVD		
SHEET 2A	PART NO 172029	REV C

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

VIEW BA

(AFTER 06-01-09)
728B/730C

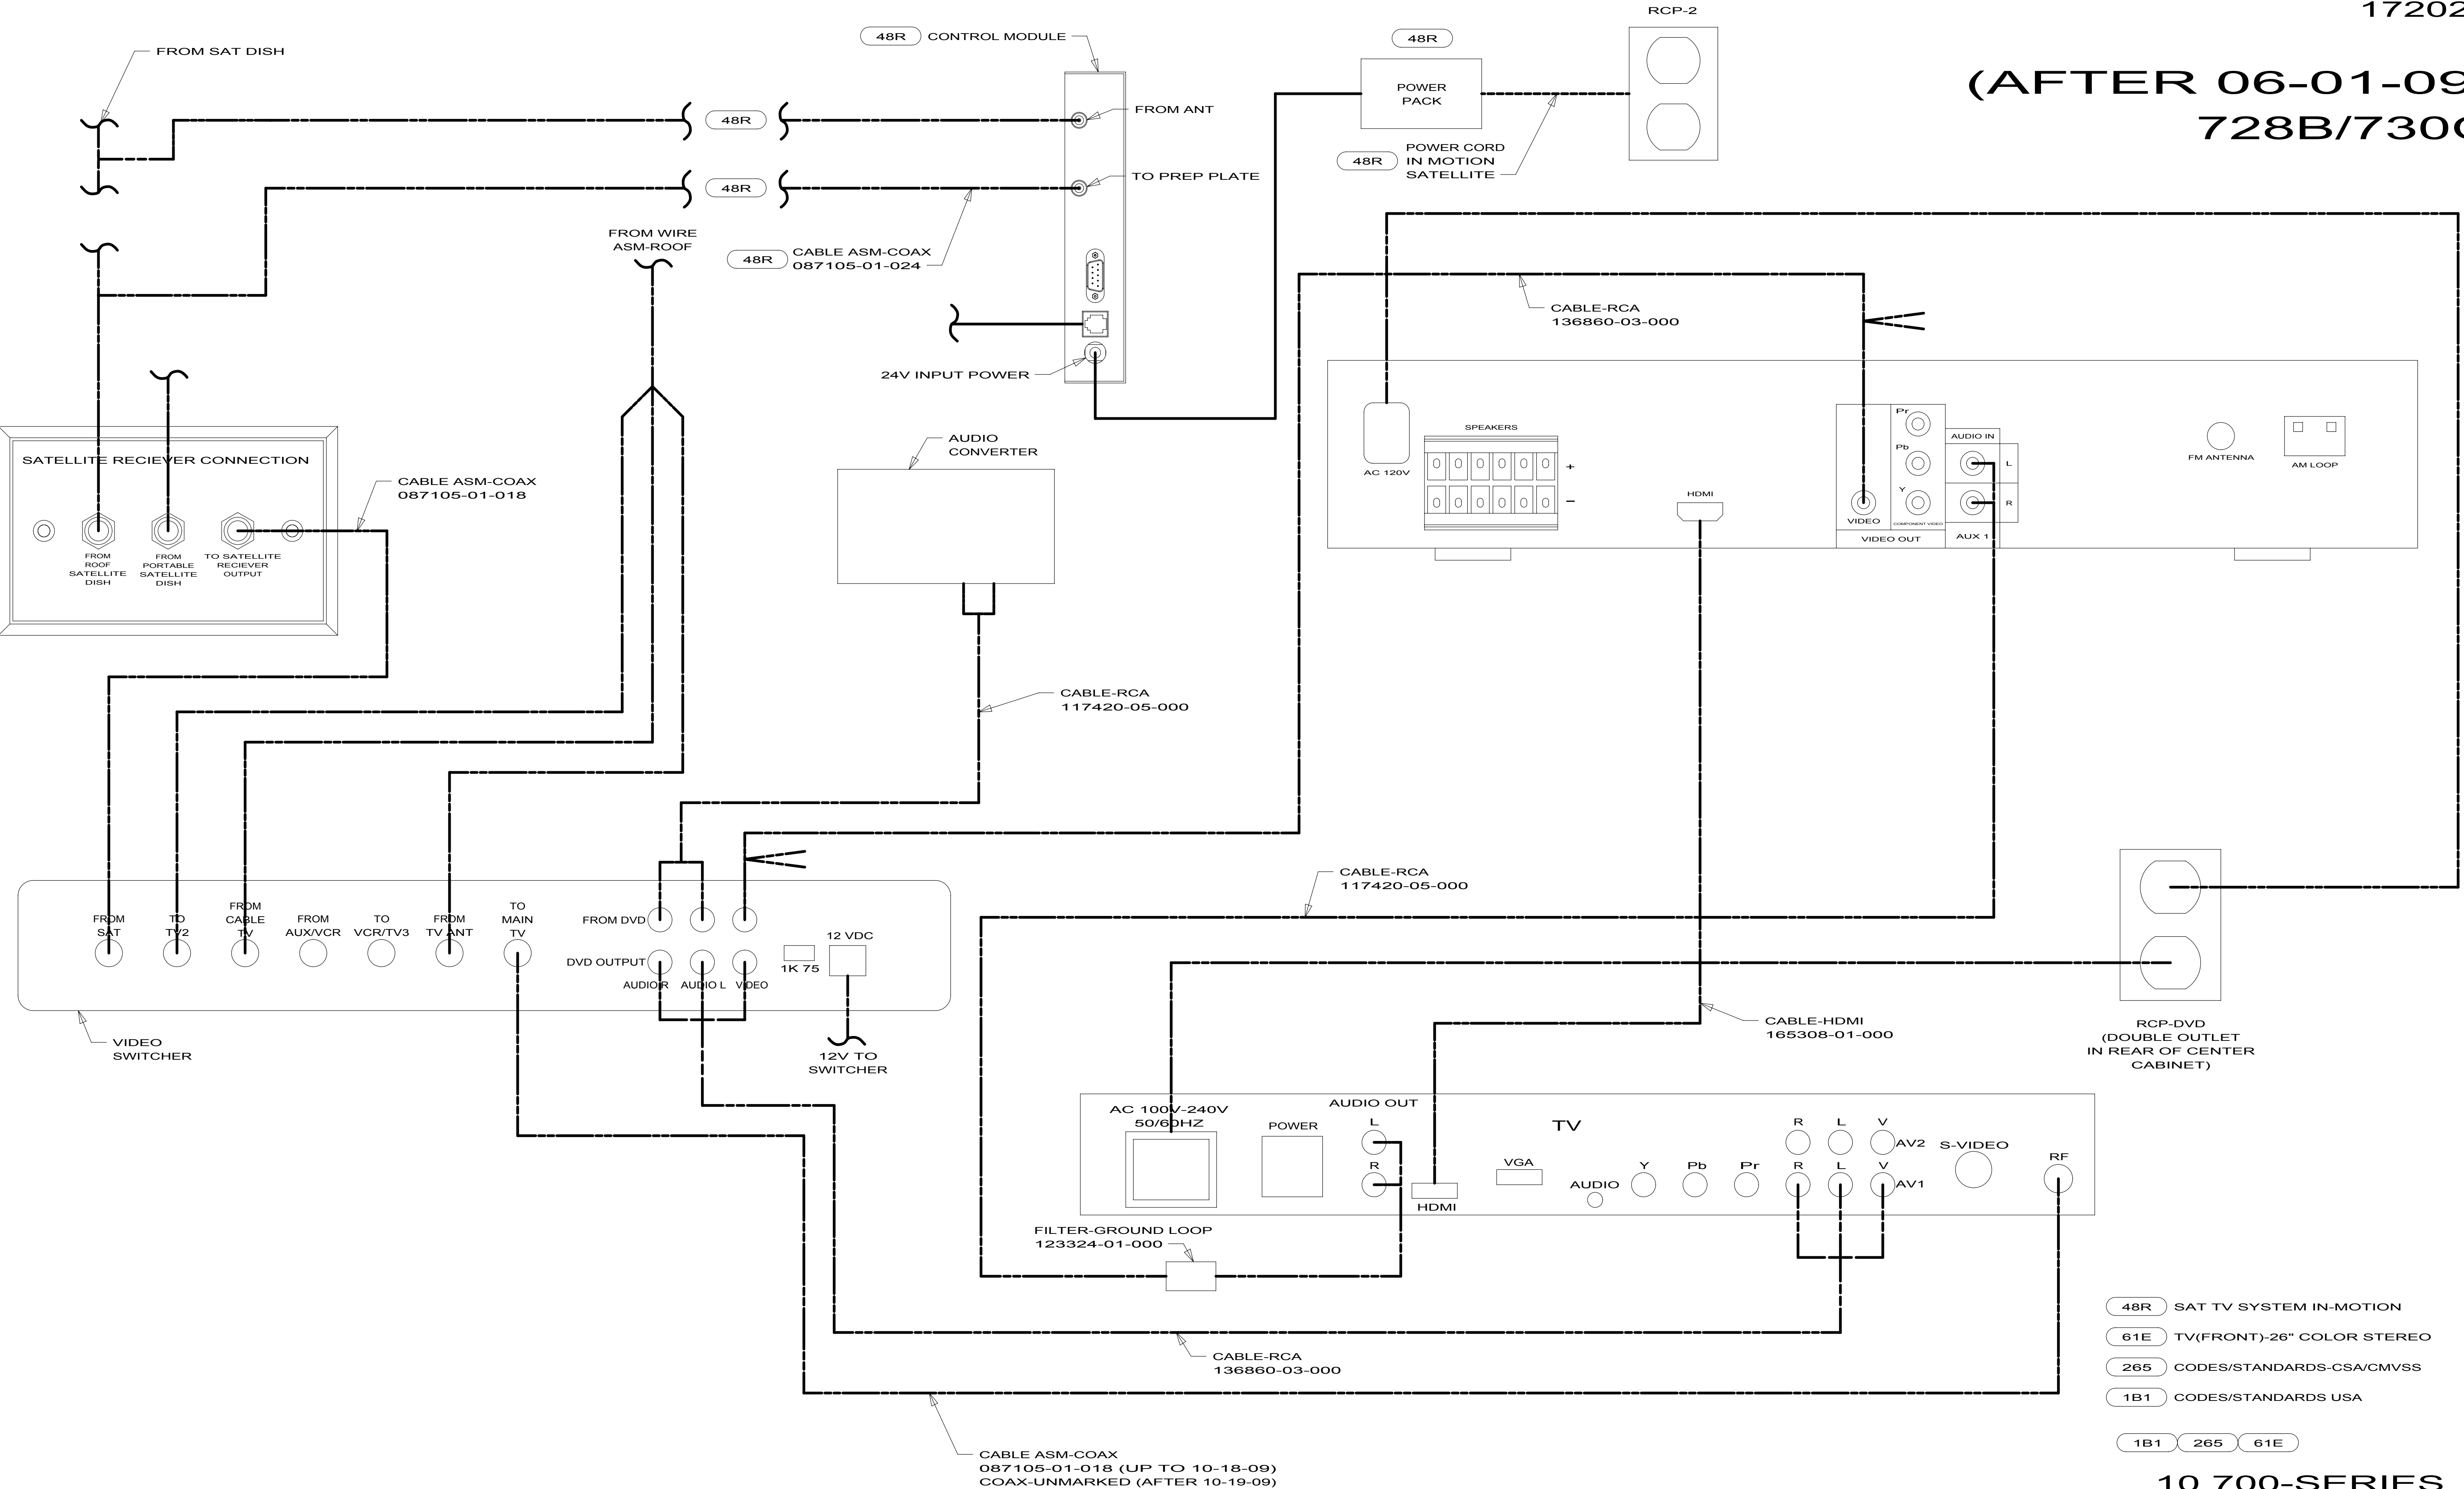

- 48R SAT TV SYSTEM IN-MOTION
- 61E TV(FRONT)-26" COLOR STEREO
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 61E

10 700-SERIES

WIRING INSTL-TV/DVD
2B 172029

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

VIEW BA

KEY	PART NUMBER	U/M	DESCRIPTION
	164270-01-700	EA	REMOTE

164270-01-000
VENDOR NO.
STS2891REM

KEY	PART NUMBER	U/M	DESCRIPTION
	164598-01-700	EA	REMOTE

164598-01-000
VENDOR NO.
RRMCGA546WJSA

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	123775-01-700	EA	BULB - 10 WATT - HALOGEN	71-JC10
	165170-01-700	EA	LENS	81230-LENS

KEY	PART NUMBER	U/M	DESCRIPTION	165808-01-000	VENDOR NO.
	165808-01-700	EA	REMOTE - TV		043-R54733W010

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	171727-01-700	EA	REMOTE	PR7ATSC

KEY	PART NUMBER	U/M DESCRIPTION	173514-01-000, 173514-02-000
	173514-01-700	EA REMOTE	VENDOR NO. 272041