
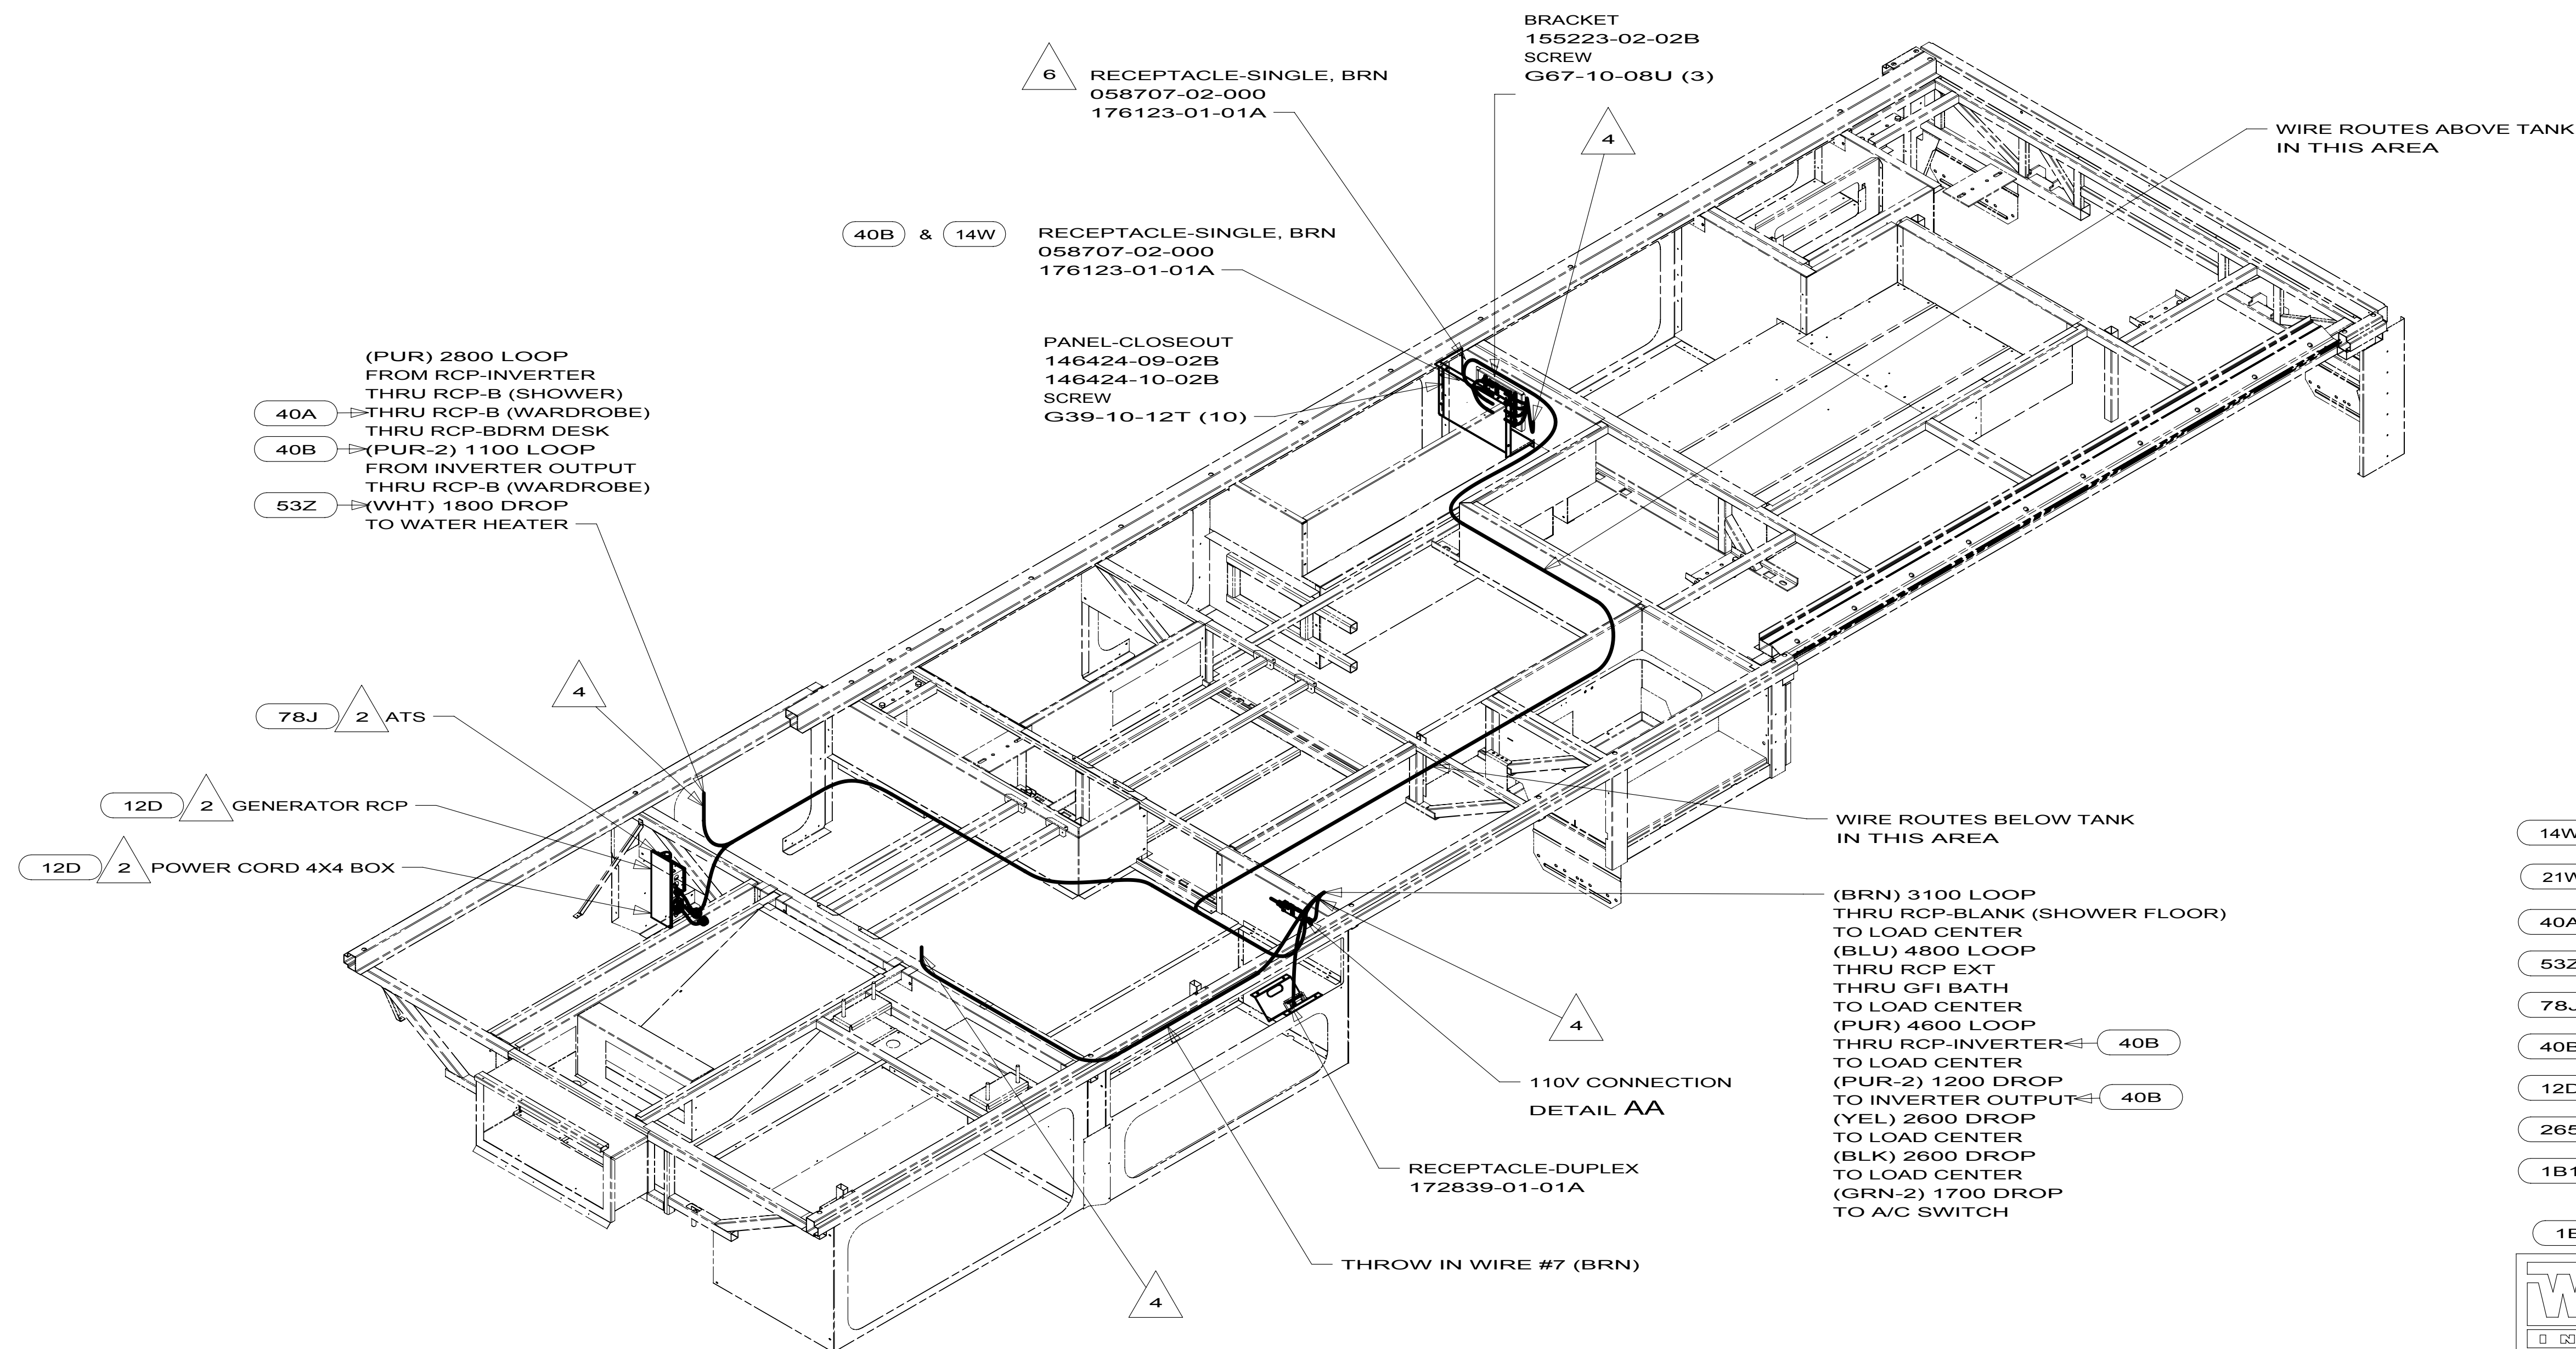
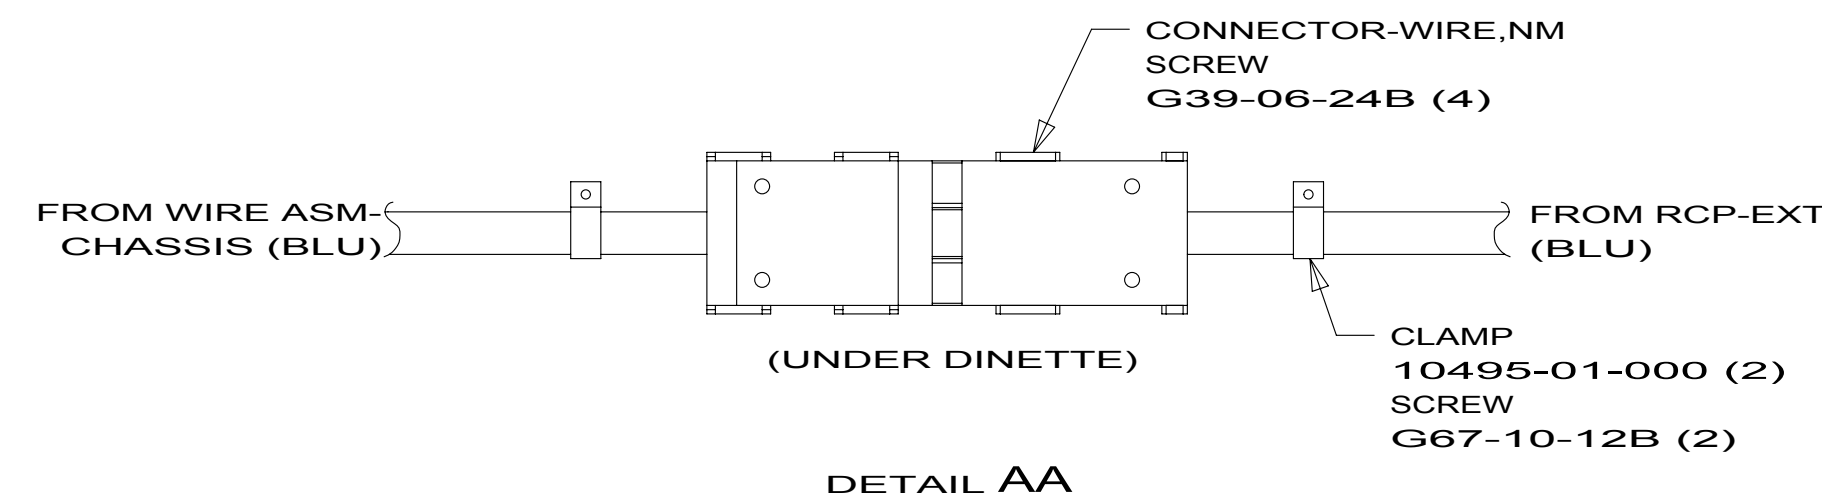


8	
DRAWING NO.	FEATURE
171594-11	1B1 12D
171594-12	1B1 78J
171594-15	265 12D
171594-16	265 78J

				1	
RELEASE		REV A	DATE	DWG NO	171594
REV	ZONE	REVISION RECORD			DATE DFT-ORIG



- | | |
|-----|------------------------------|
| 14W | DINETTE |
| 21W | DINING/BUFFET/TV |
| 40A | INVERTER-DC/AC WITHOUT |
| 53Z | WTR HTR-6GAL/110/LP/MTR/AUTO |
| 78J | ELECTRICAL SYSTEM-50 AMP |
| 40B | INVERTER-DC/AC, 300 WATT |
| 12D | ELECTRICAL SYSTEM 30 AMP |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |

		COPY RIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFTTR		ORIG. DATE	
CHKRR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
M.E.		10 D33C	
DSNRR		MATERIAL:	
UNSPECIFIED TOLERANCES ARE: WHOLE DIM (X) ± 3 ONE-PLACE (X.X) ± 1.5 TWO-PLACE (X.XX) ± 0.50 ANGLE ± 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-BODY,110V			
SHEET 1 of 5		PART NO 171594	
		REV	

△ NOT USED W/ 40A & 21W

5. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM. USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

4 WIRE ROUTED THROUGH FLOOR IN THIS AREA.

3 WIRE IN SIDEWALL.

2 SEE LOAD CENTER/ATS FOR ADDITIONAL INFORMATION.

1. WIRES ROUTED UNDER FLOOR.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000



	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-BODY,110V

SHEET 1 OF 5	PART NO 171594	REV
----------------------------	--------------------------	-----



REF: 1 1/21/2010

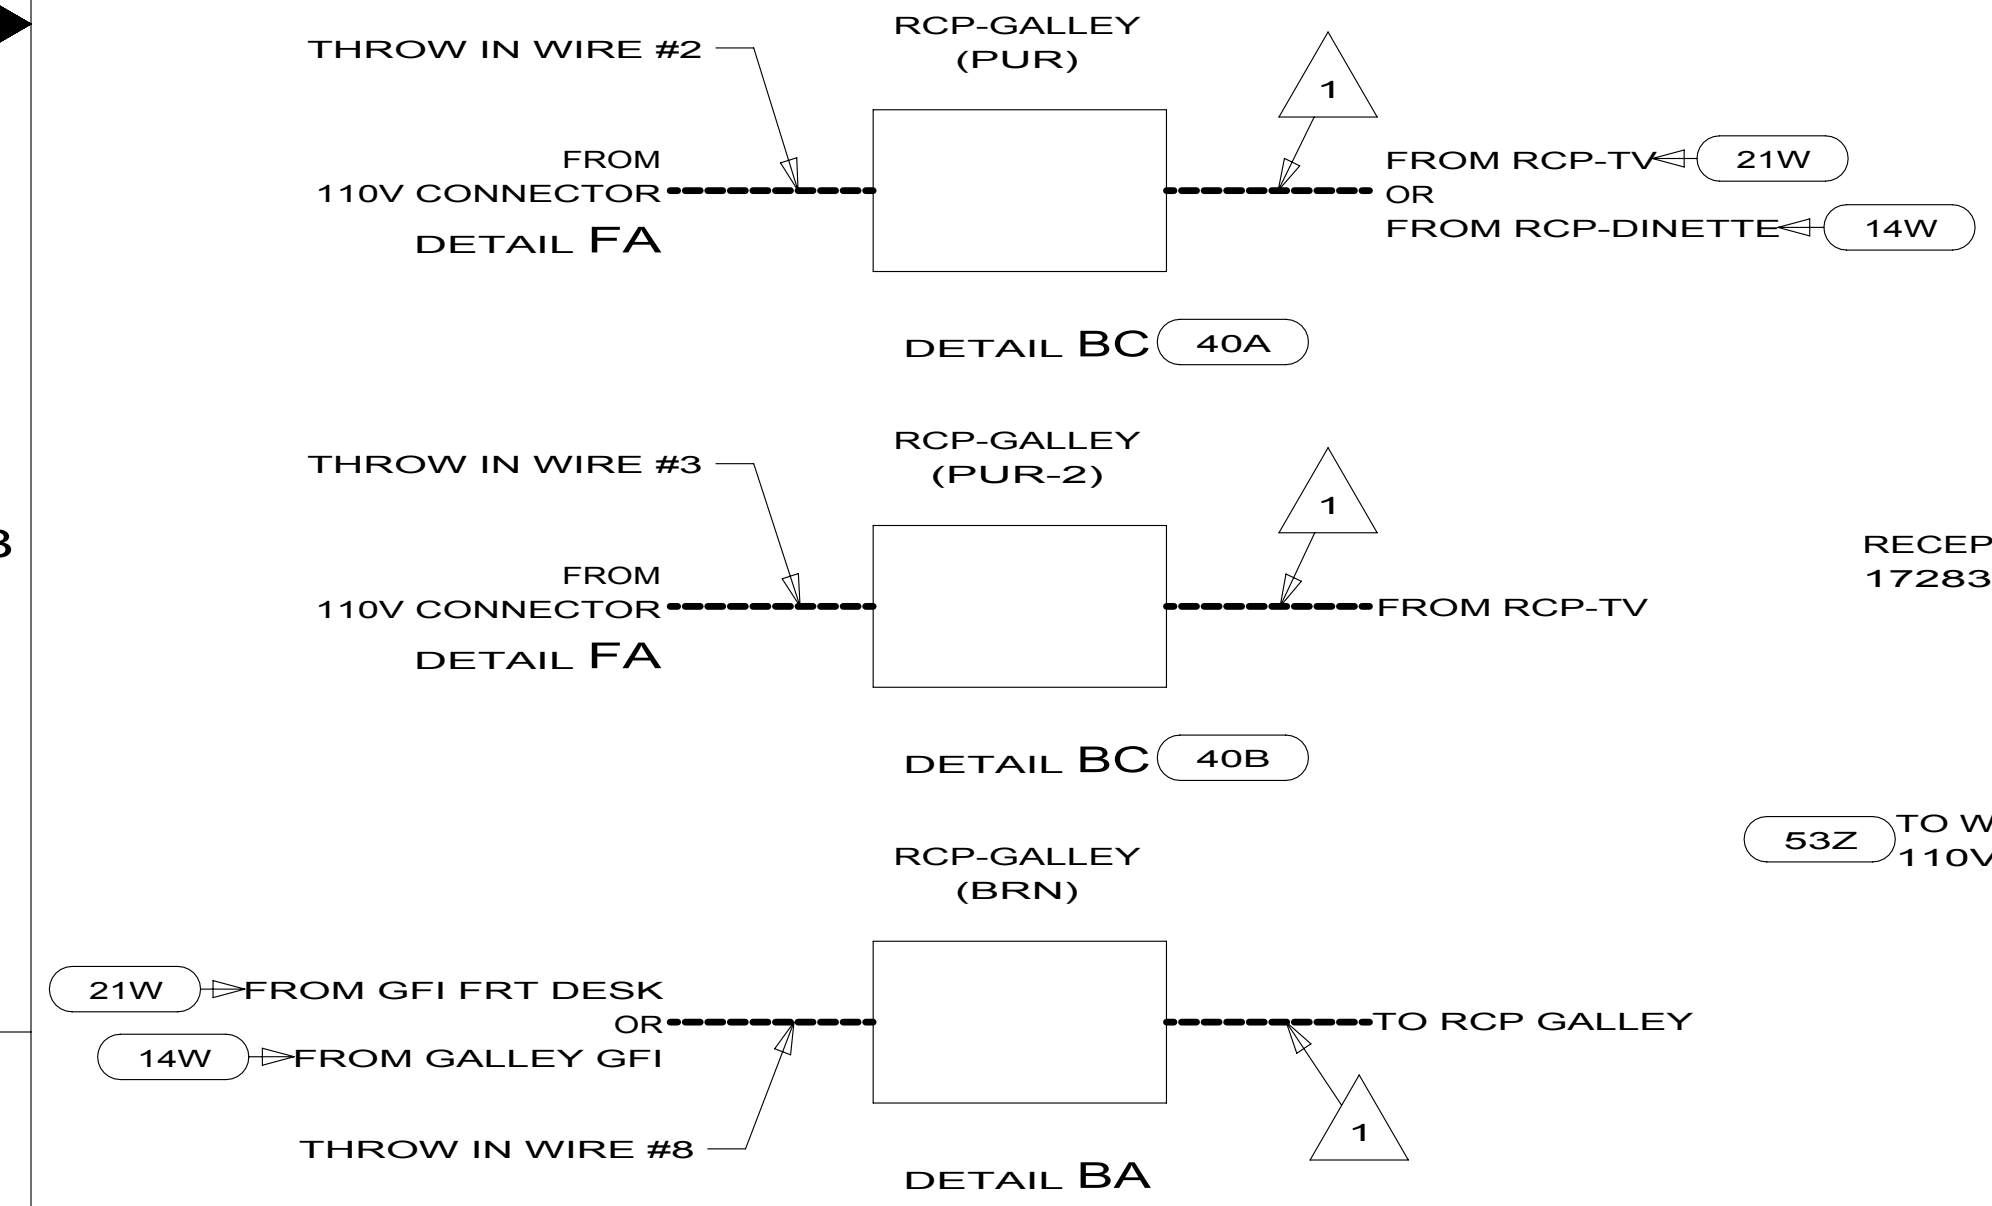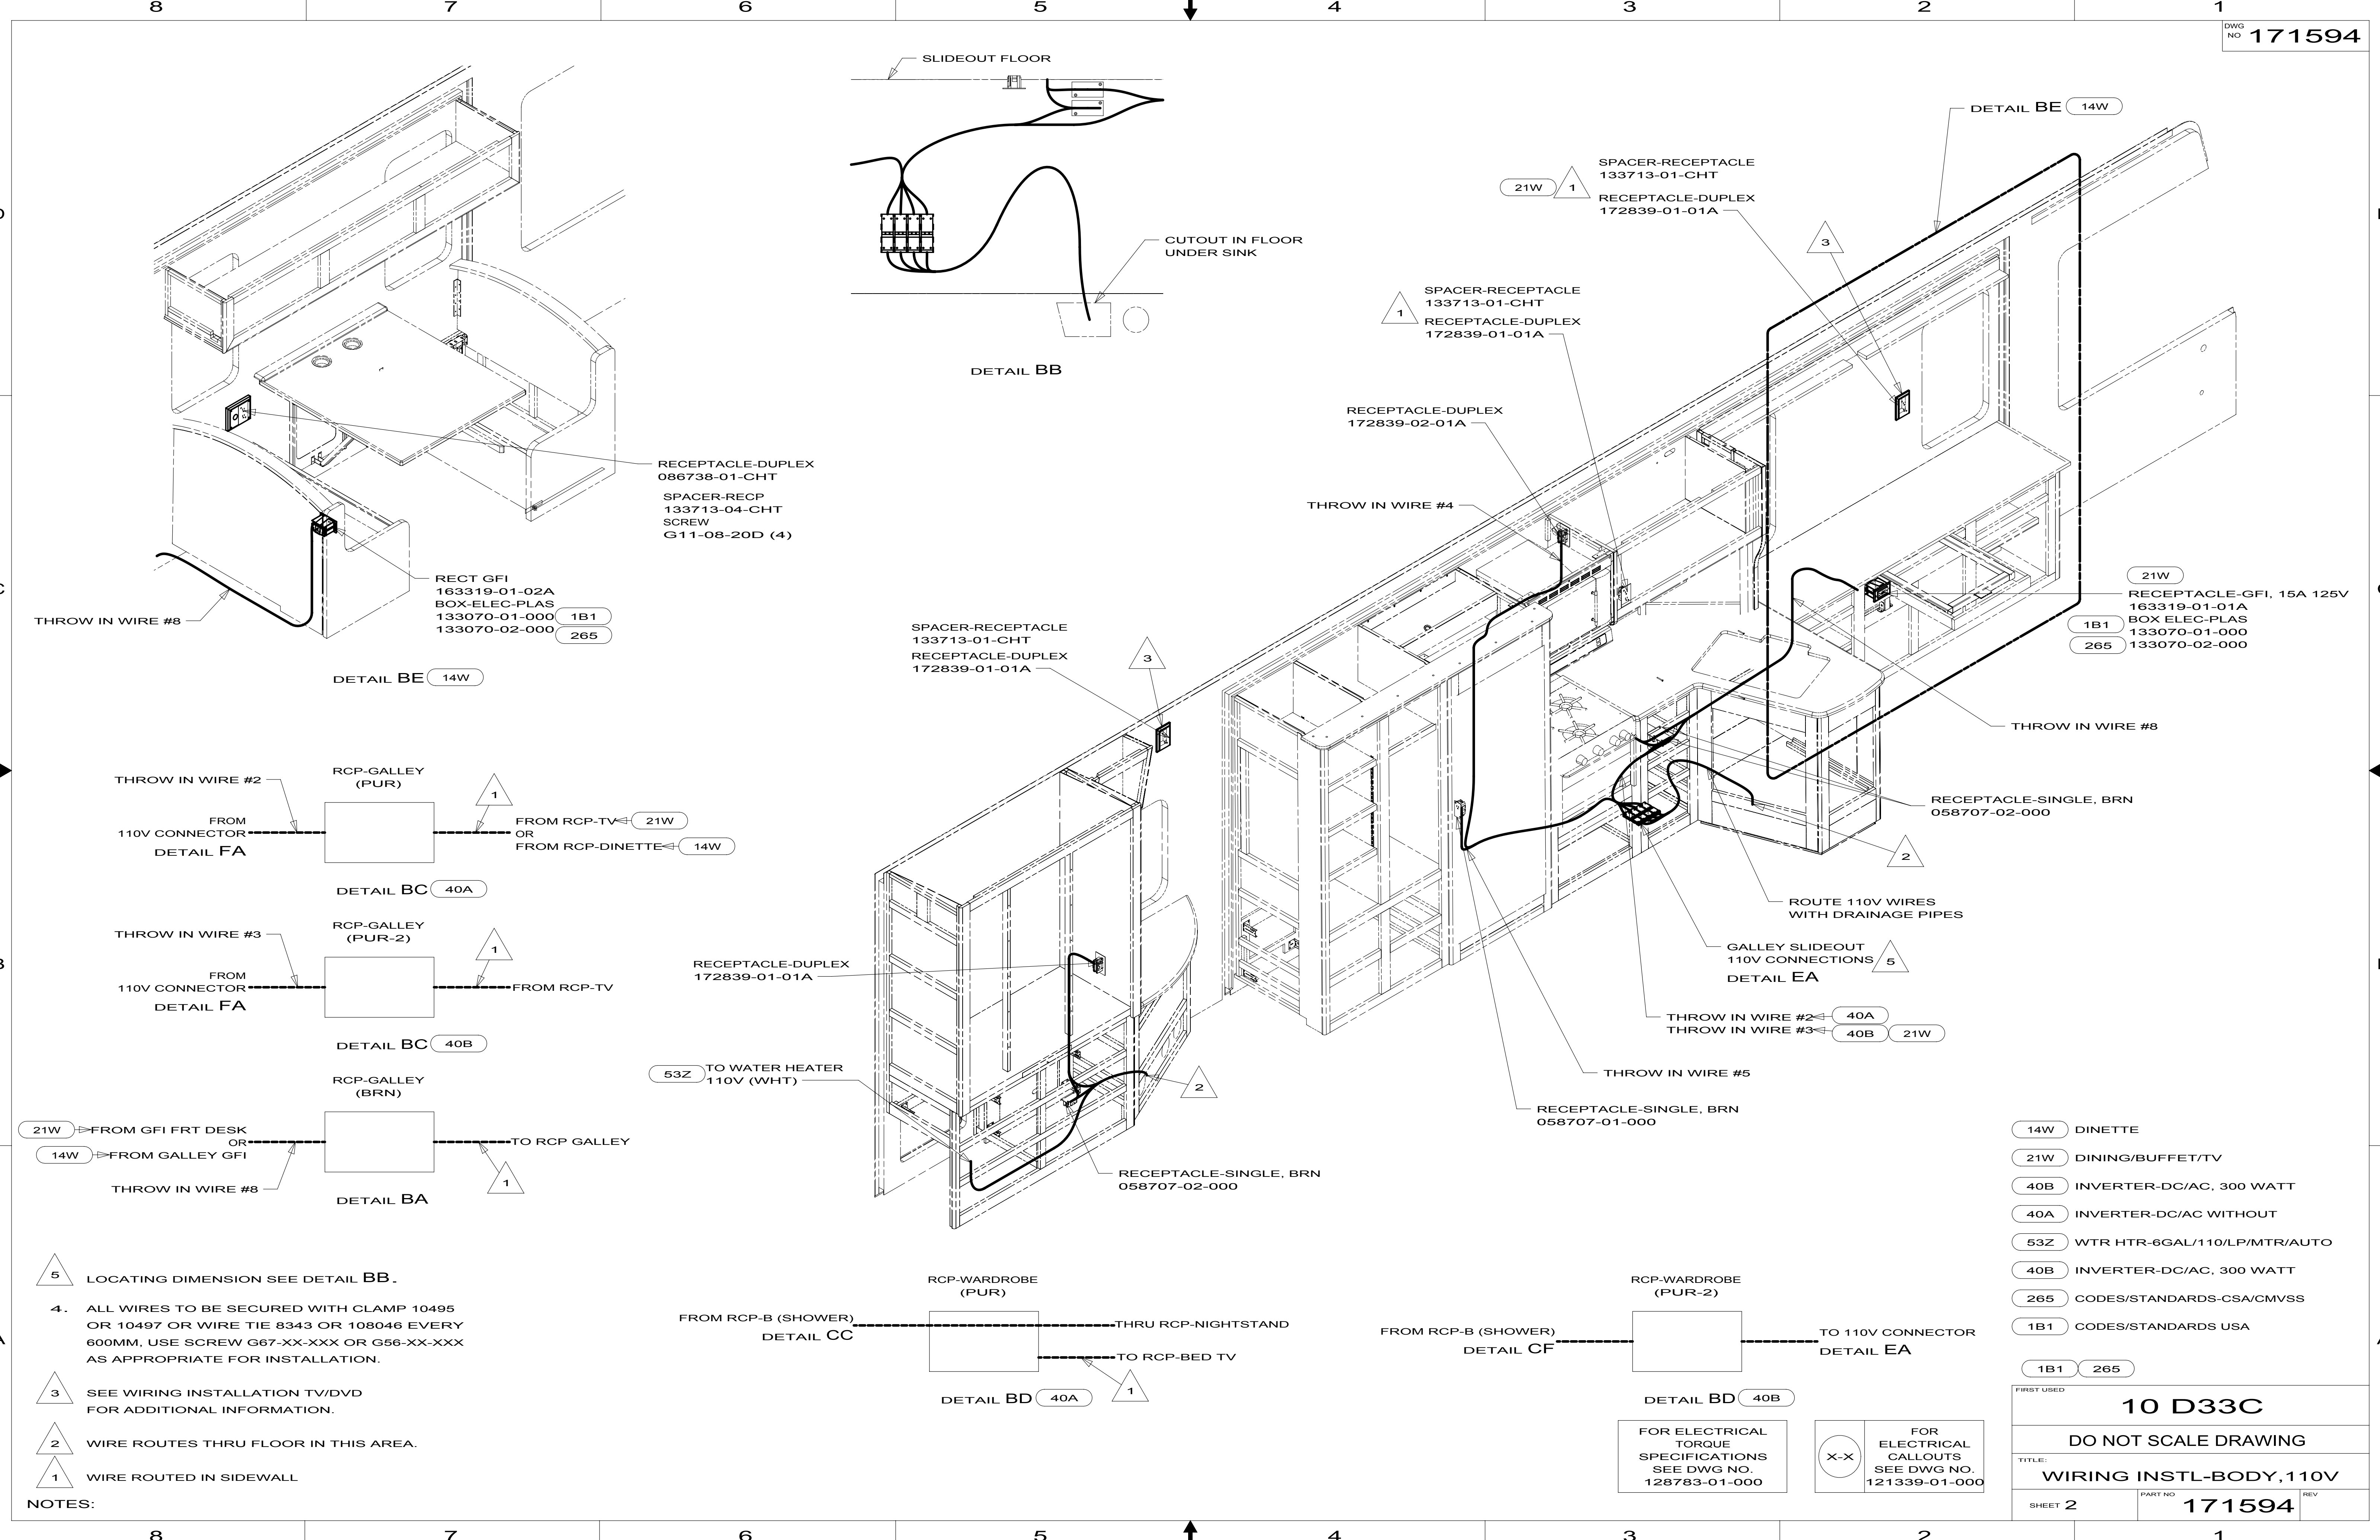

- 5 LOCATING DIMENSION SEE DETAIL BB.
4. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
- 3 SEE WIRING INSTALLATION TV/DVD FOR ADDITIONAL INFORMATION.
- 2 WIRE ROUTES THRU FLOOR IN THIS AREA.
- 1 WIRE ROUTED IN SIDEWALL

NOTES:

14W	DINETTE
21W	DINING/BUFFET/TV
40B	INVERTER-DC/AC, 300 WATT
40A	INVERTER-DC/AC WITHOUT
53Z	WTR HTR-6GAL/110/LP/MTR/AUTO
40B	INVERTER-DC/AC, 300 WATT
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265
FIRST USED	
10 D33C	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY, 110V	
SHEET 2	PART NO 171594

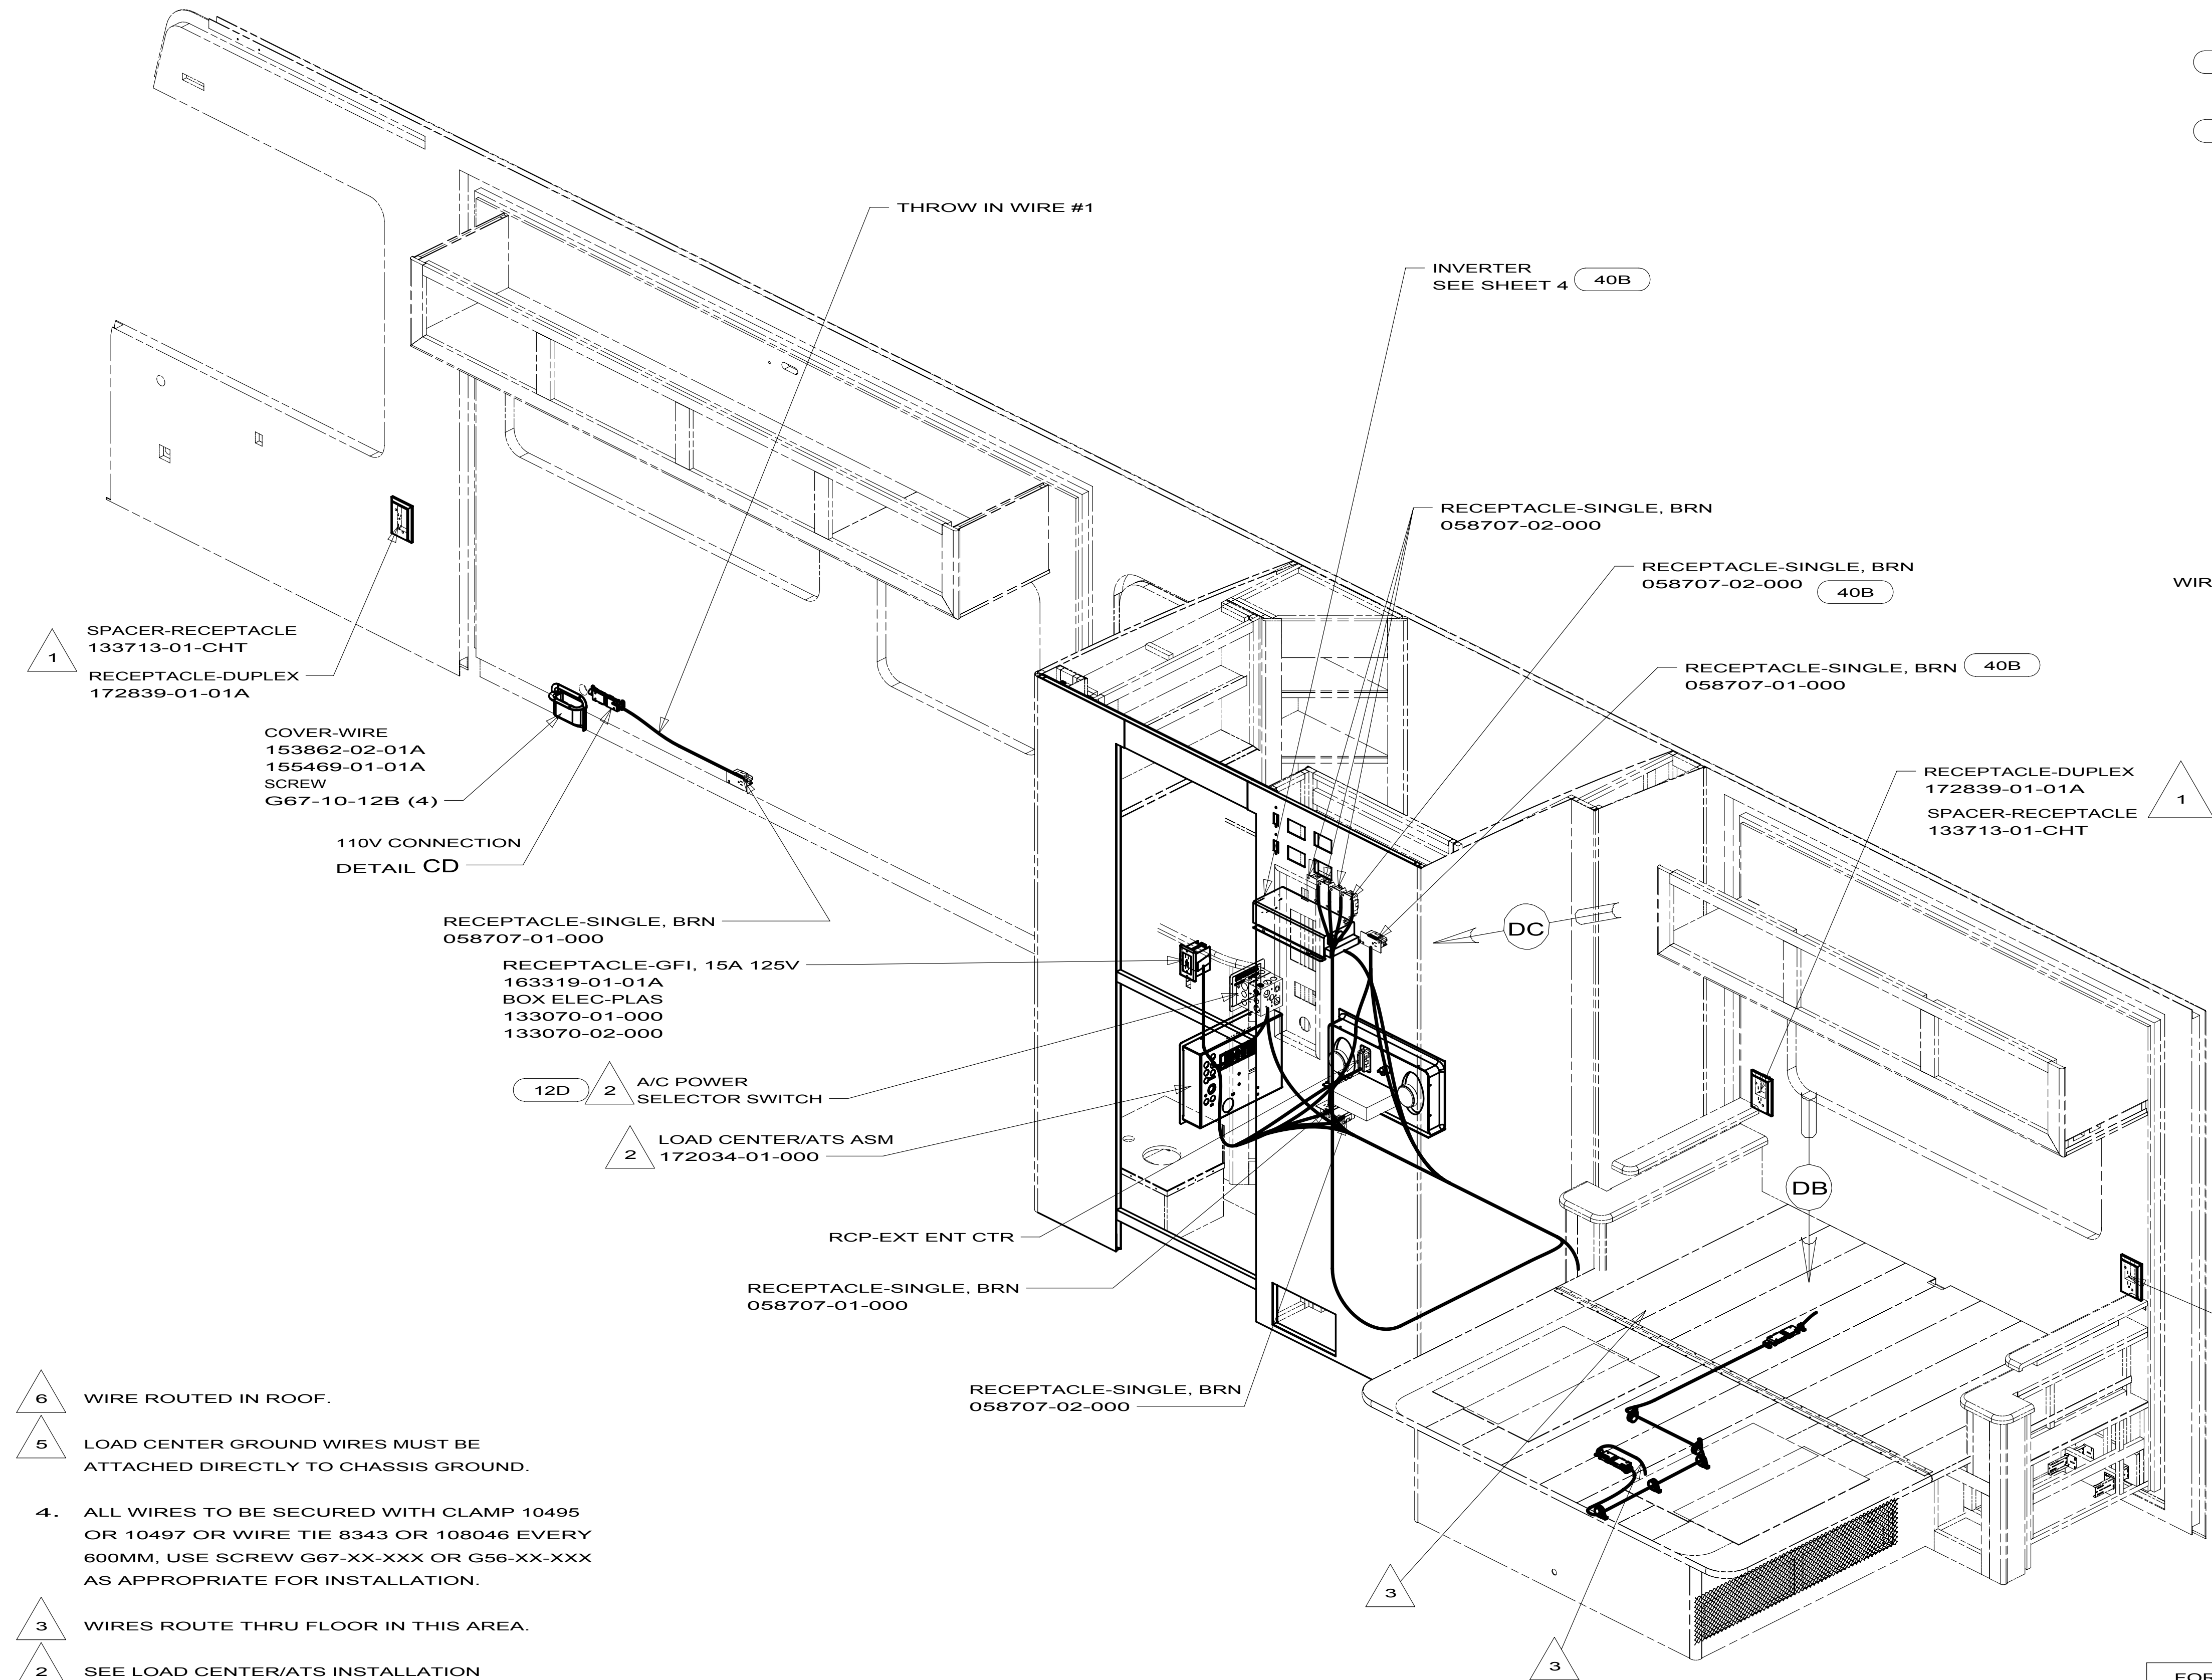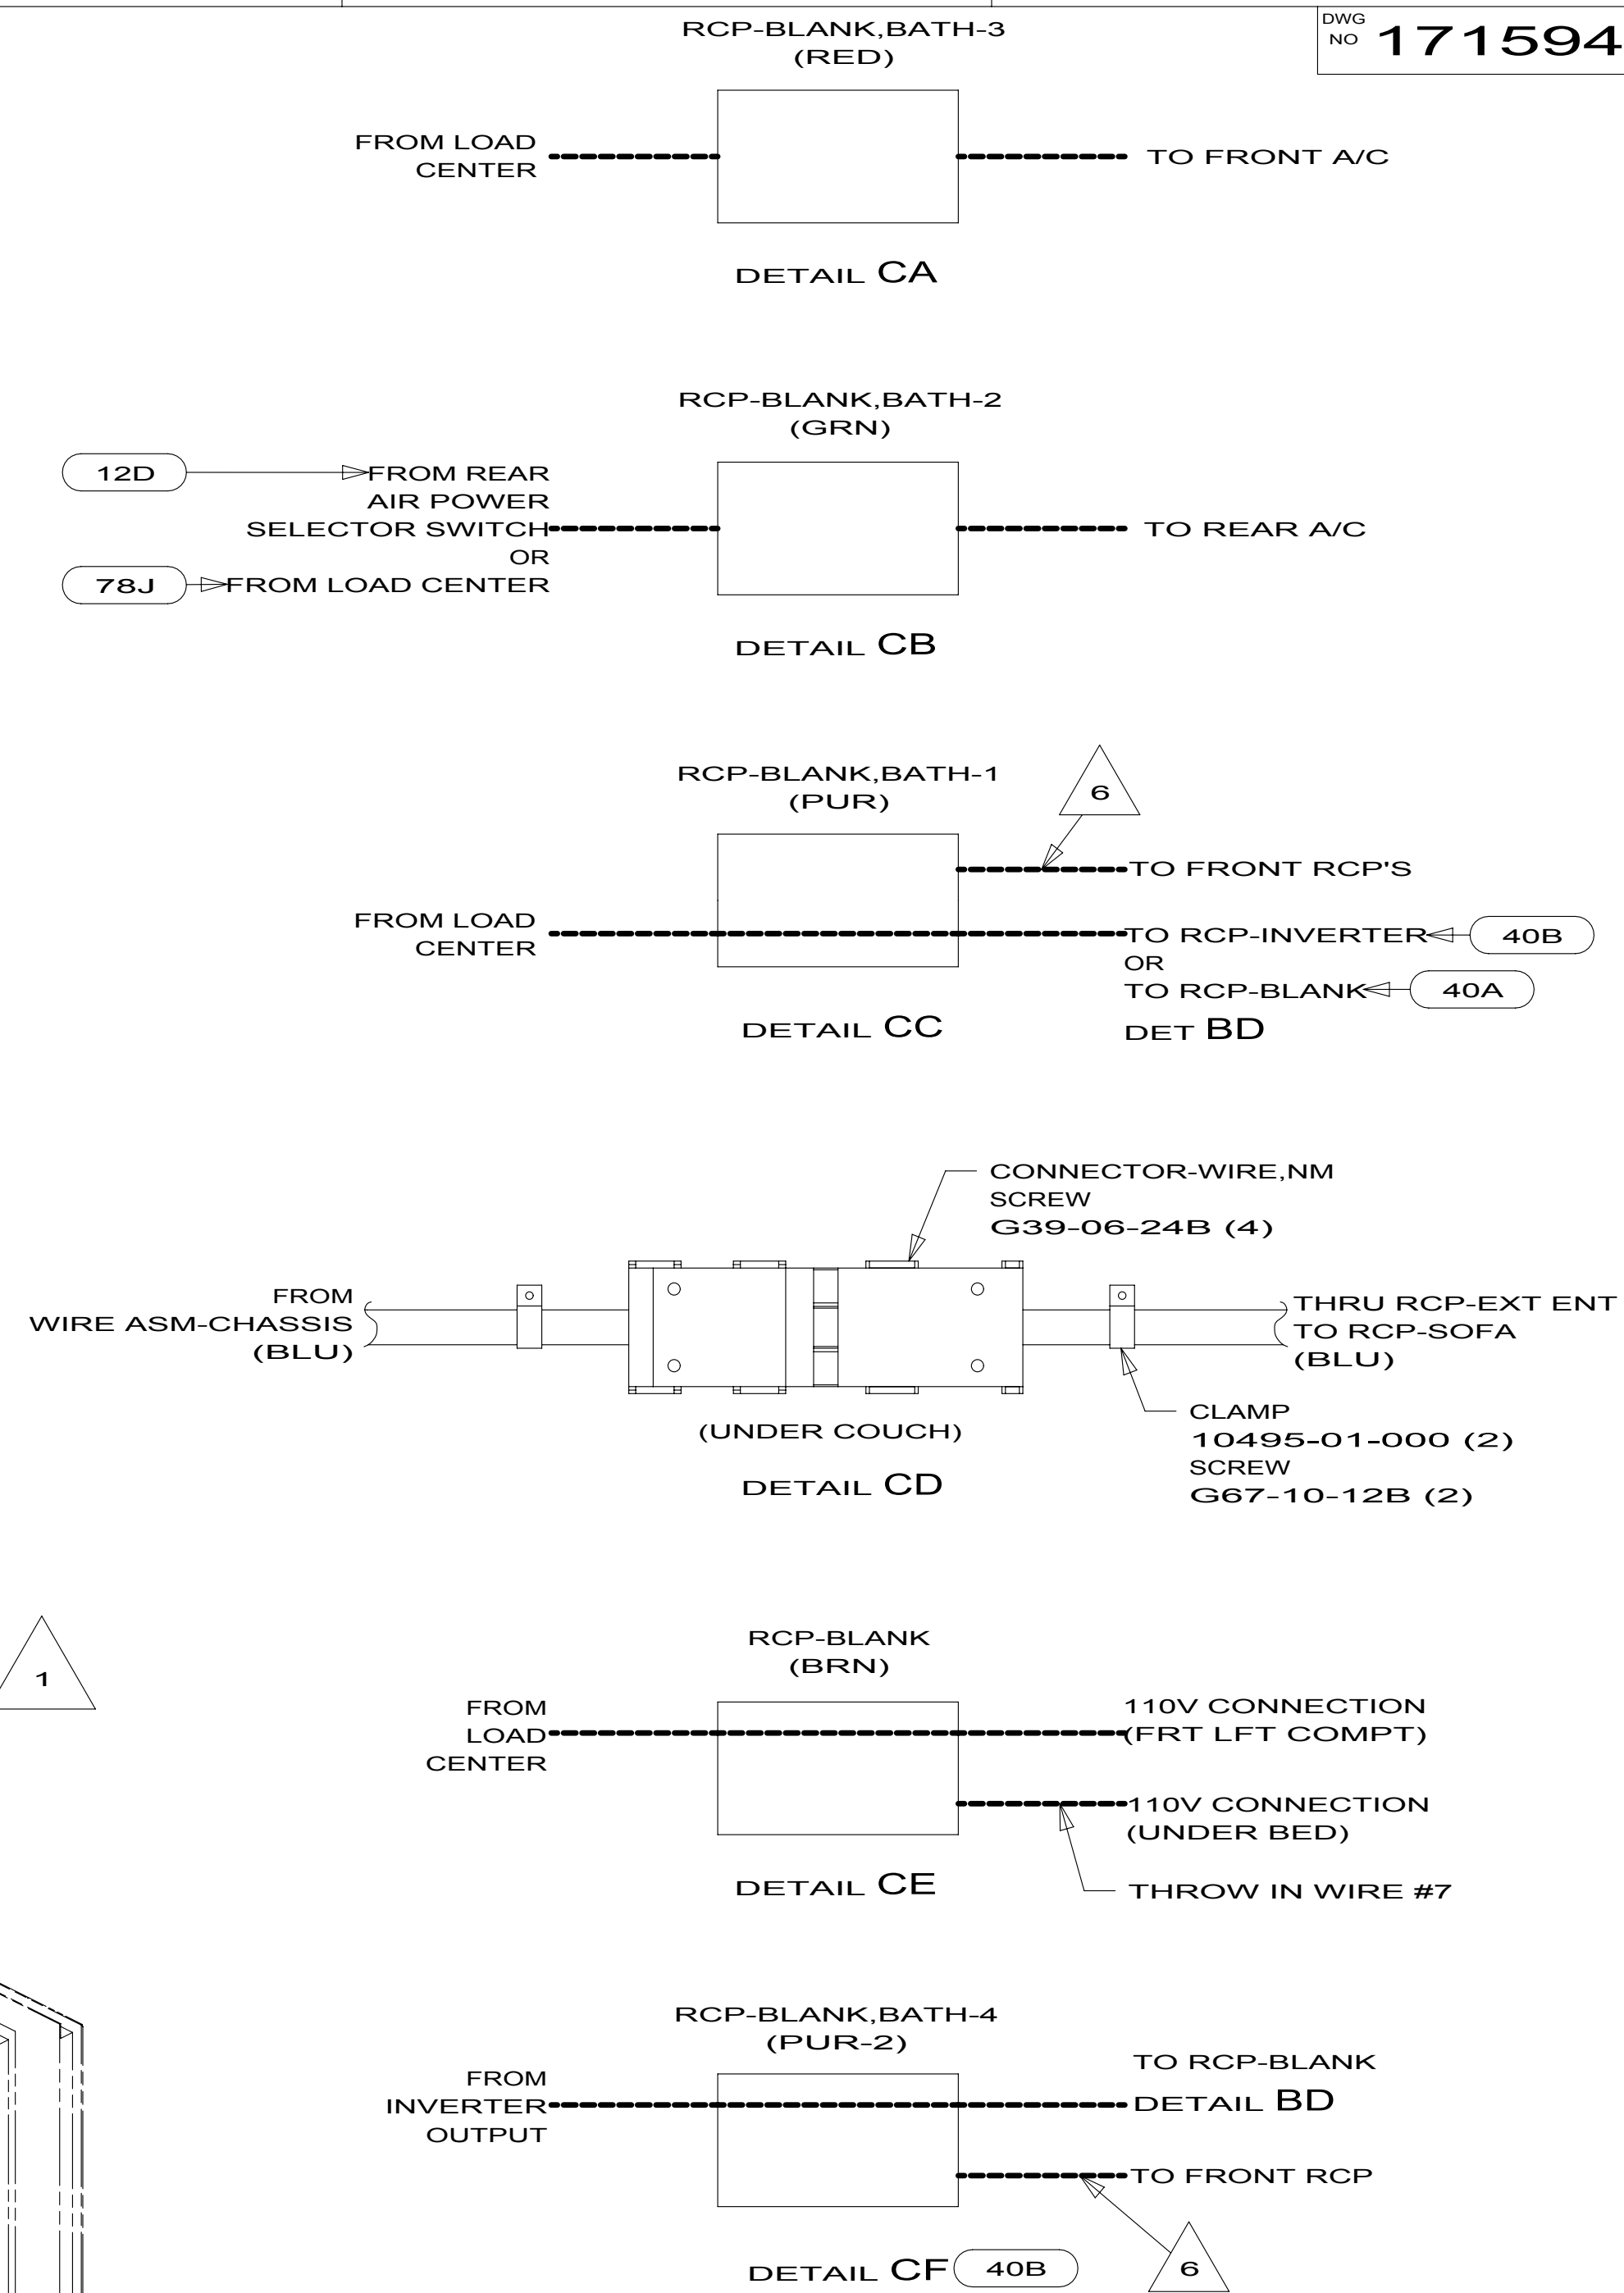

- 6 WIRE ROUTED IN ROOF.
- 5 LOAD CENTER GROUND WIRES MUST BE ATTACHED DIRECTLY TO CHASSIS GROUND.
4. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
- 3 WIRES ROUTE THRU FLOOR IN THIS AREA.
- 2 SEE LOAD CENTER/ATS INSTALLATION FOR ADDITIONAL INFORMATION.
- 1 WIRE ROUTED IN SIDEWALL.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 78J ELECTRICAL SYSTEM-50 AMP
- 12D ELECTRICAL SYSTEM 30 AMP
- 40A INVERTER-DC/AC WITHOUT
- 40B INVERTER-DC/AC, 300 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FIRST USED		
10 D33C		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 3	PART NO 171594	REV

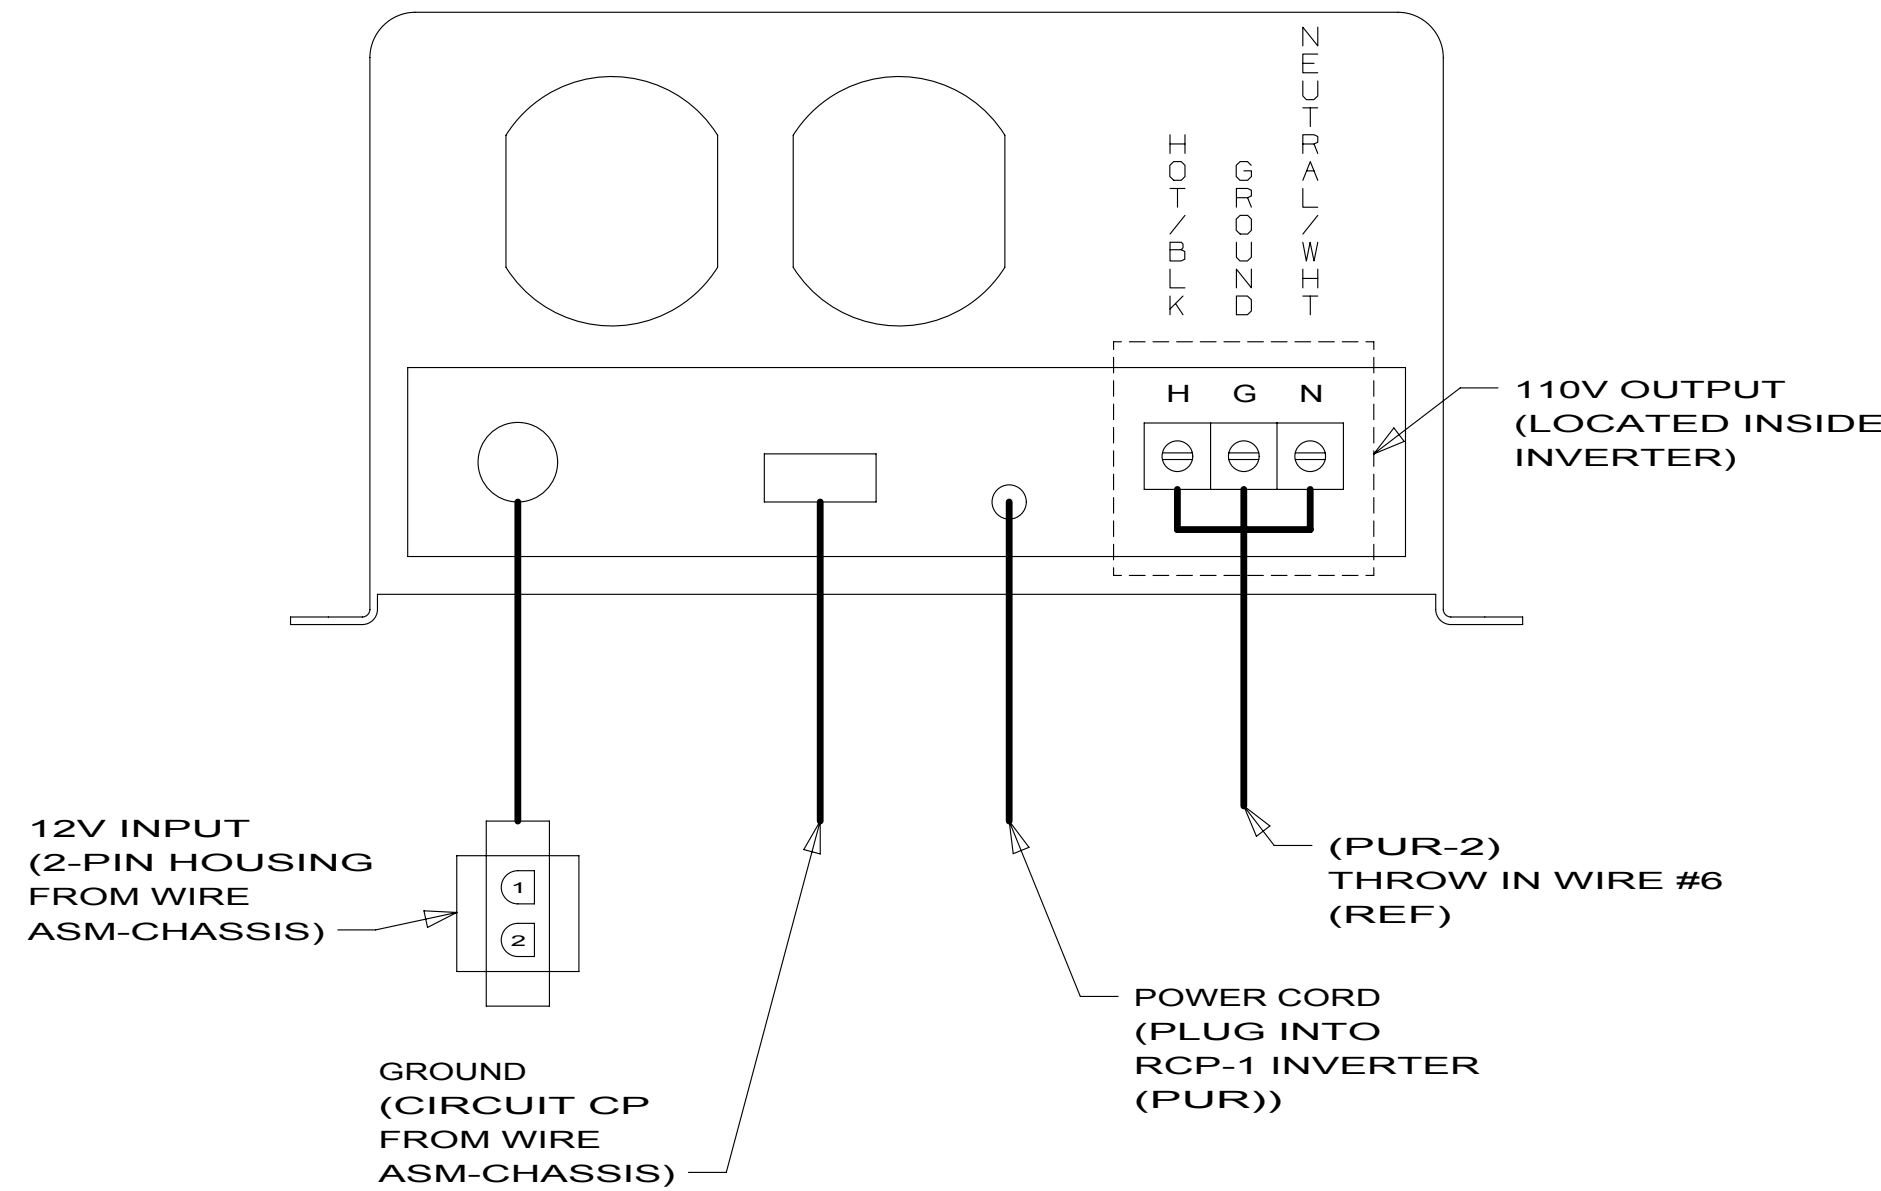

DETAIL DA 40B

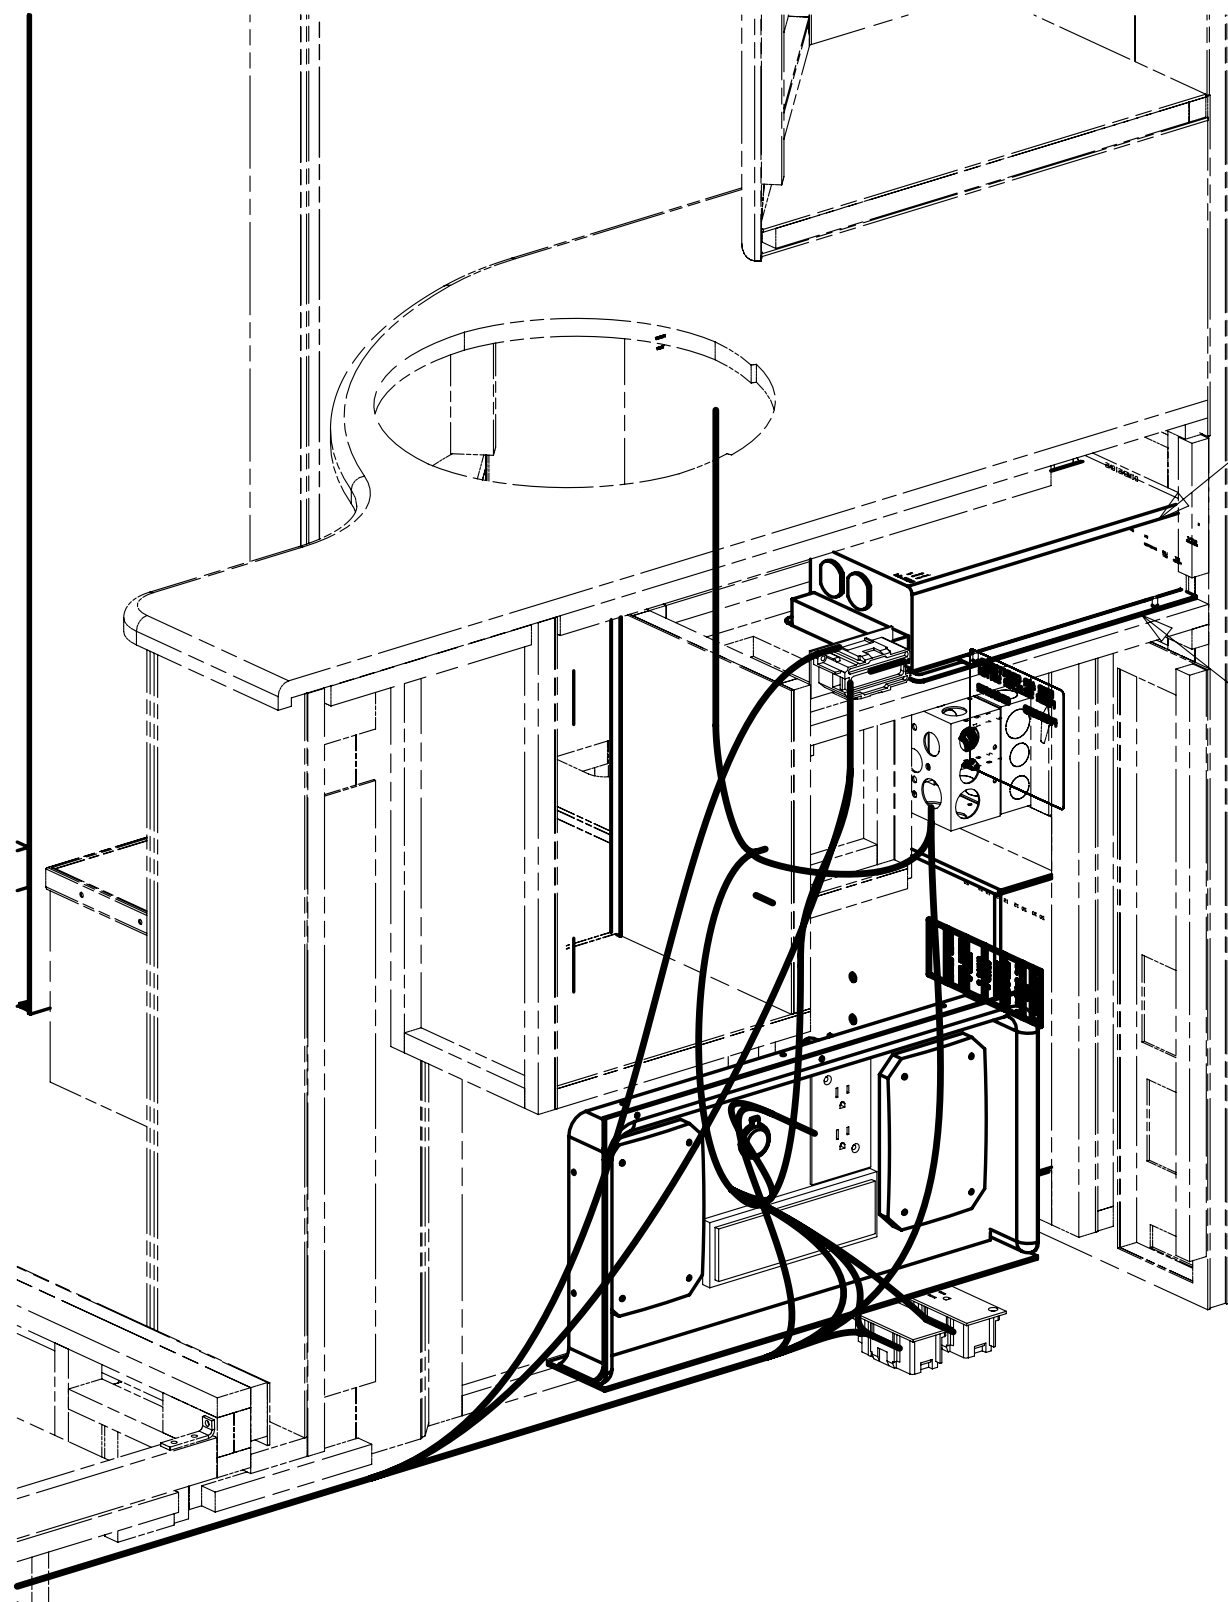

DETAIL DC 40B

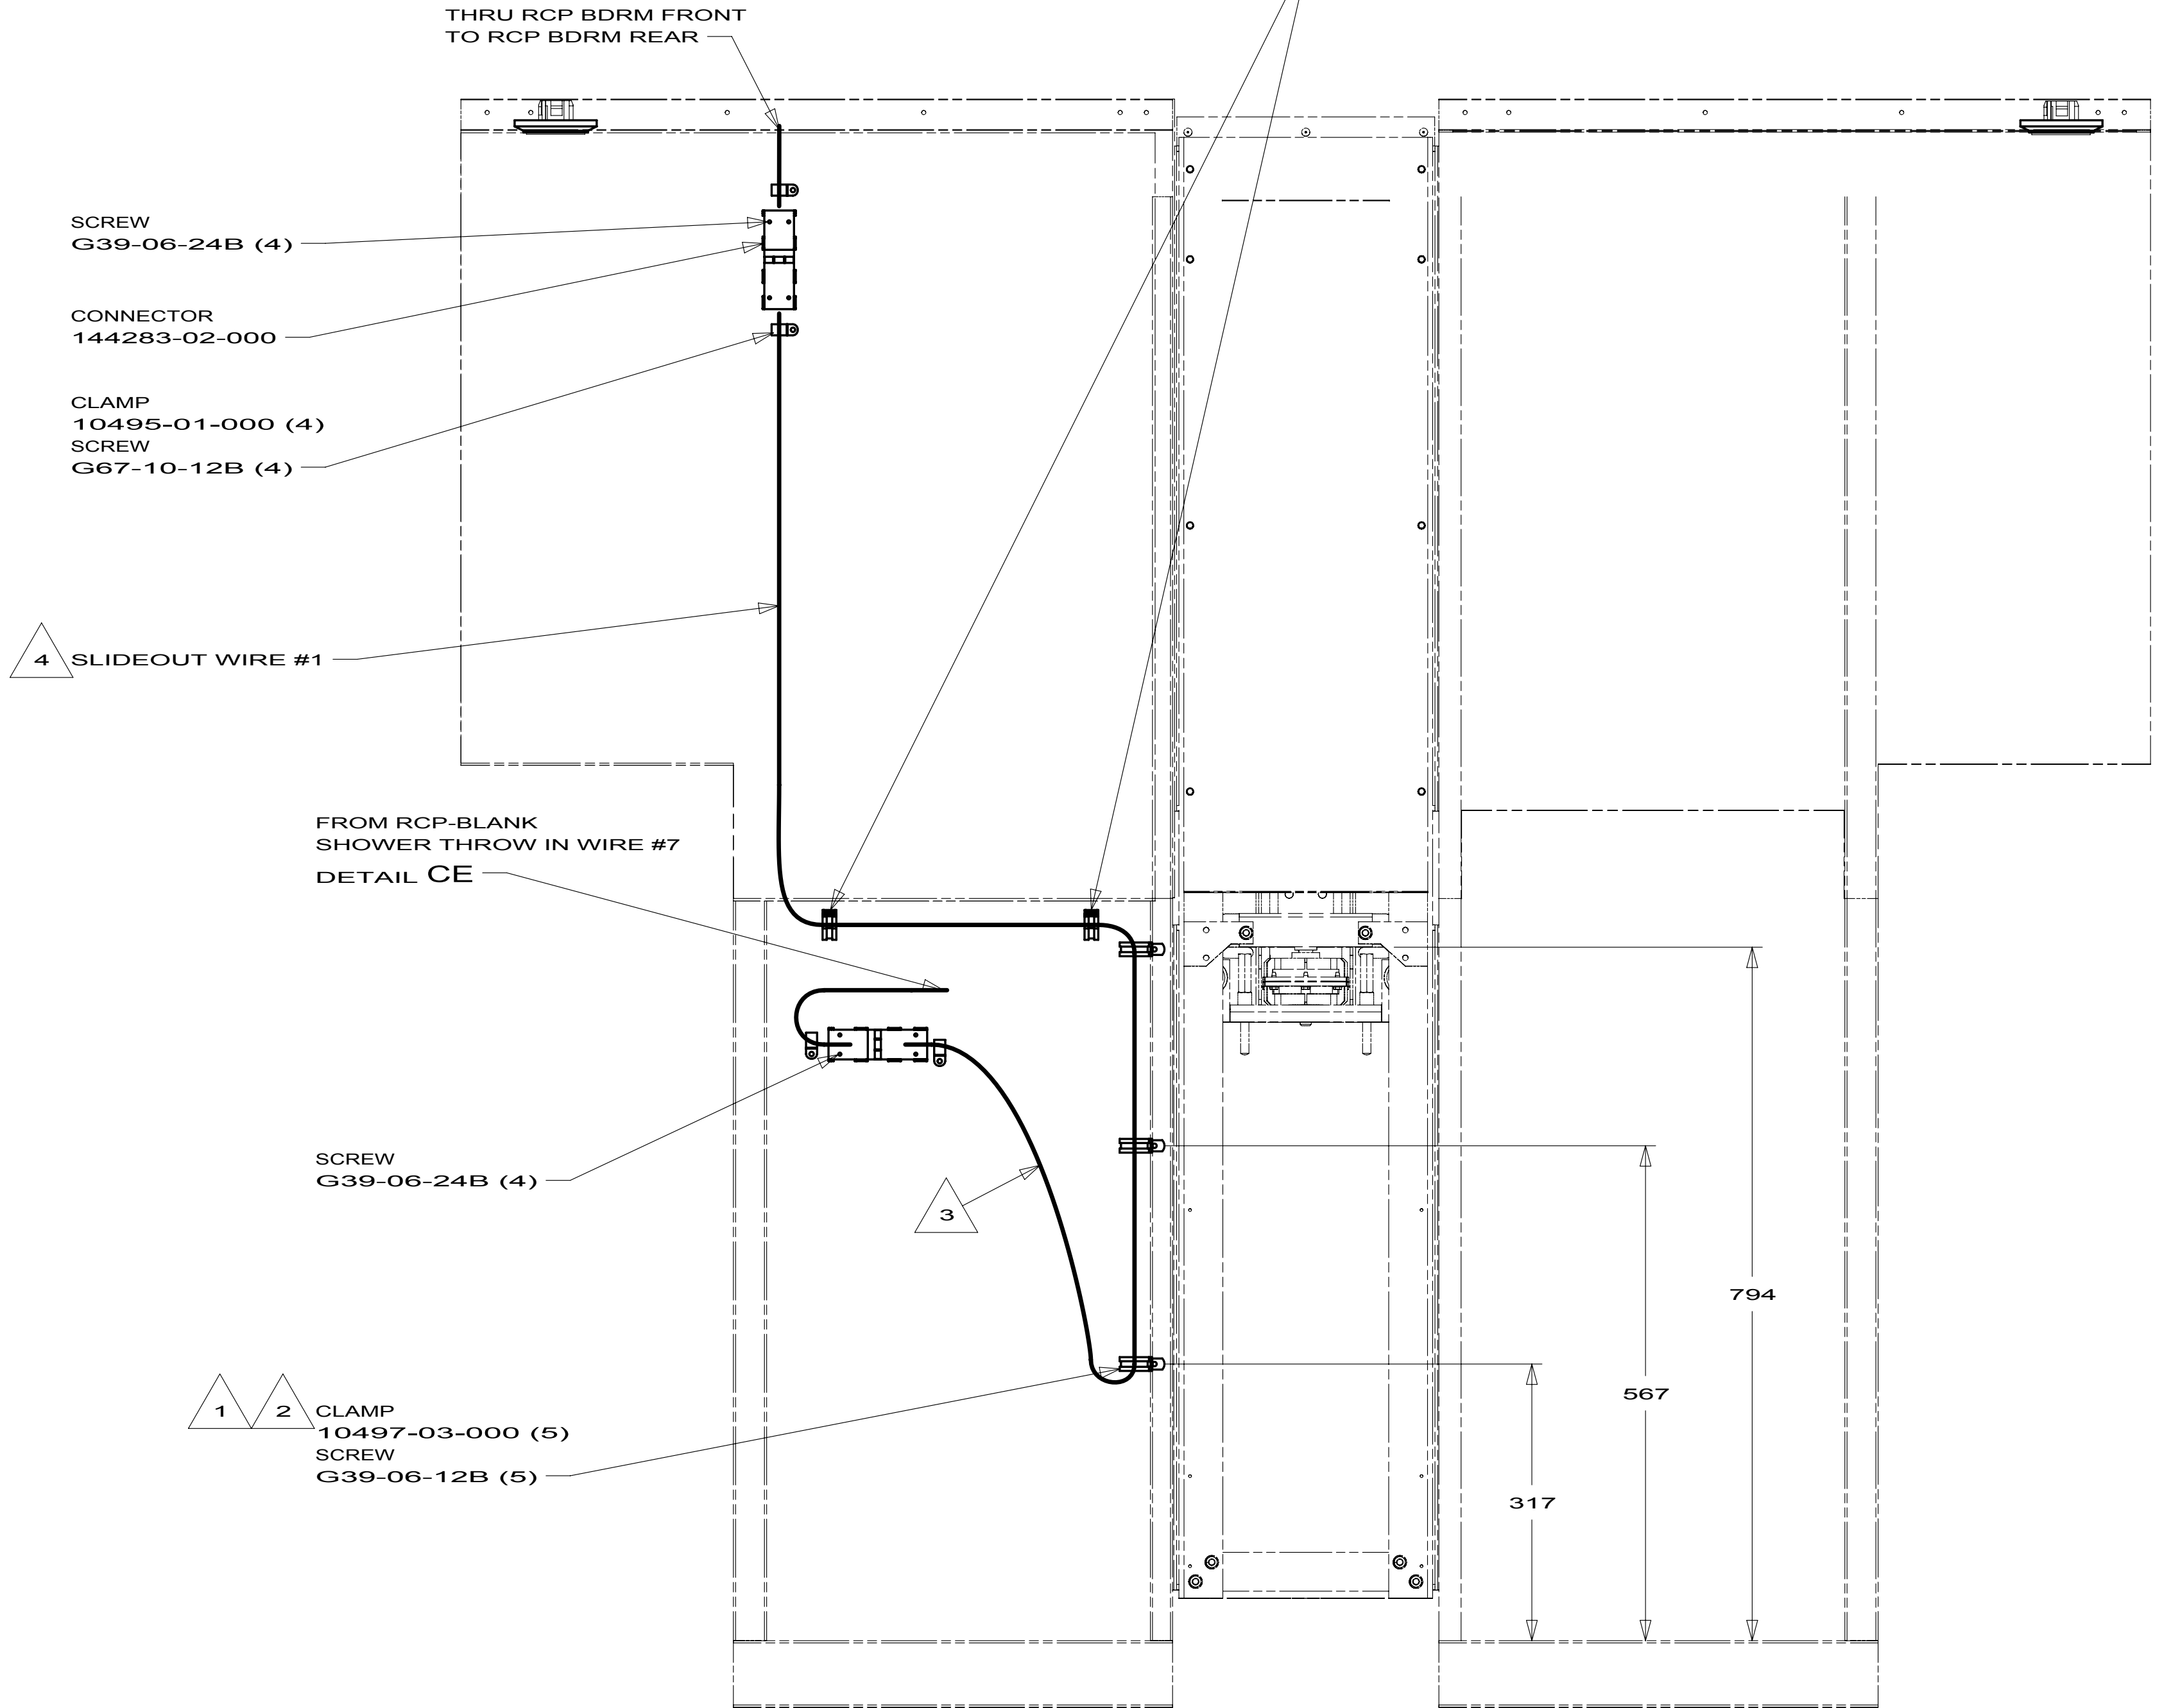

VIEW DB

- 4 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 3 MAKE LOOP AS SMALL AS POSSIBLE WHEN SLIDEOUT IS COMPLETELY RETRACTED.
- 2 RUN 12V WIRE ALONG WITH SLIDEOUT WIRE #3.
- 1 WIRE MUST BE ROUTED THROUGH CLAMPS AS SHOWN.

NOTES:



- 40B INVERTER-DC/AC, 300 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D33C		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 4	PART NO 171594	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

[illegible]

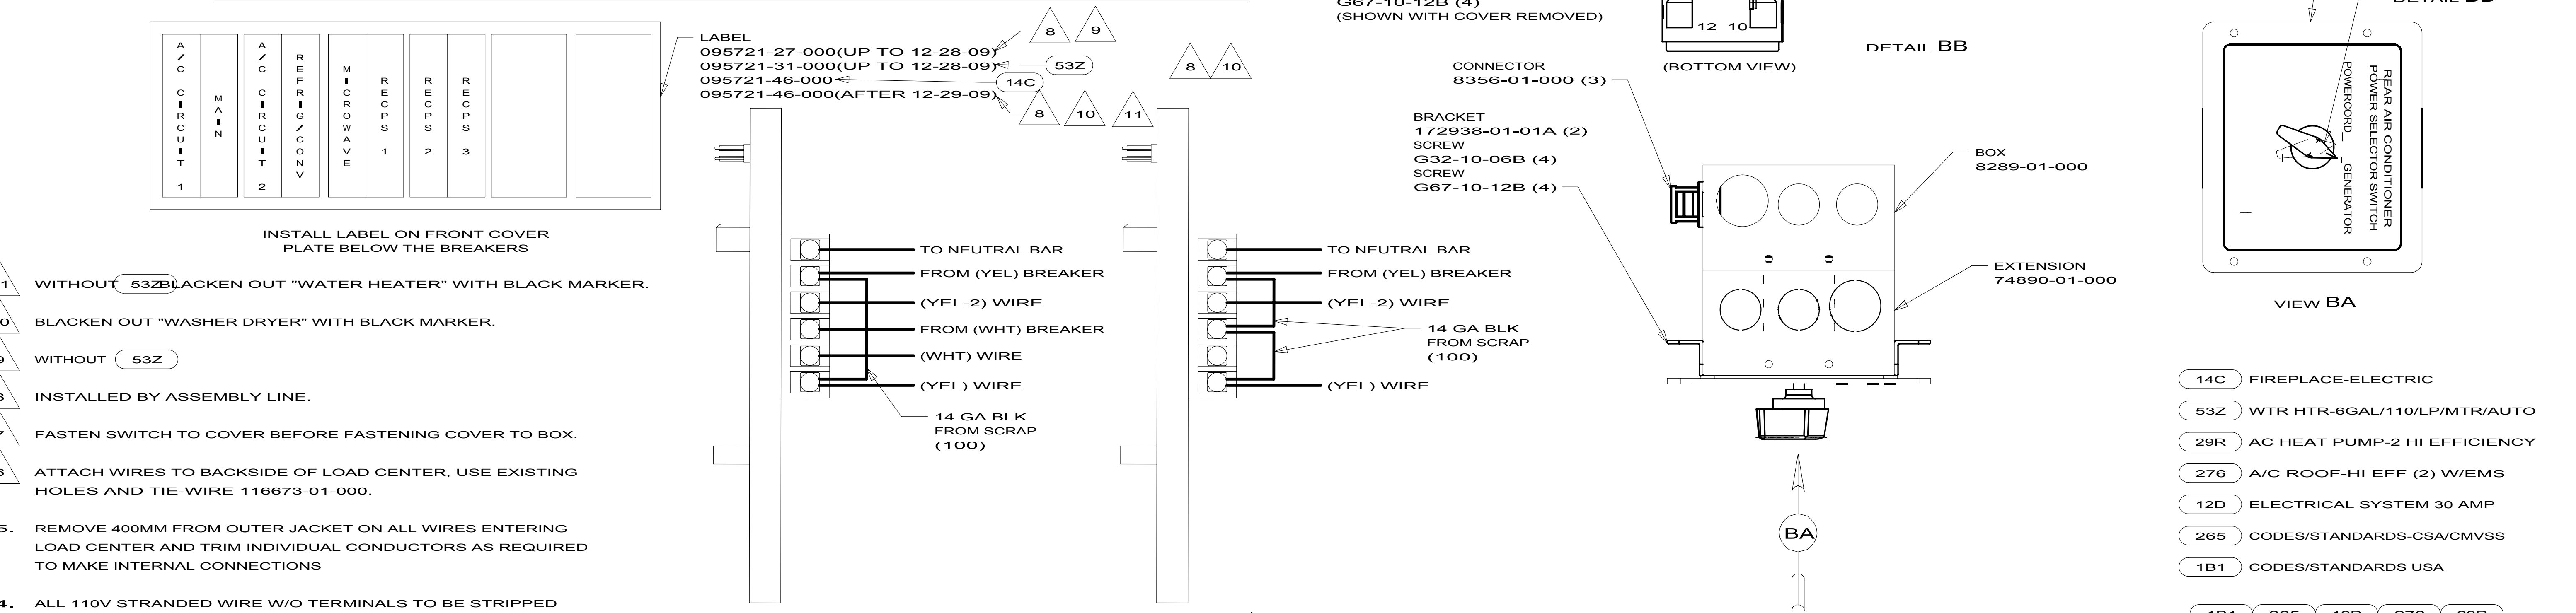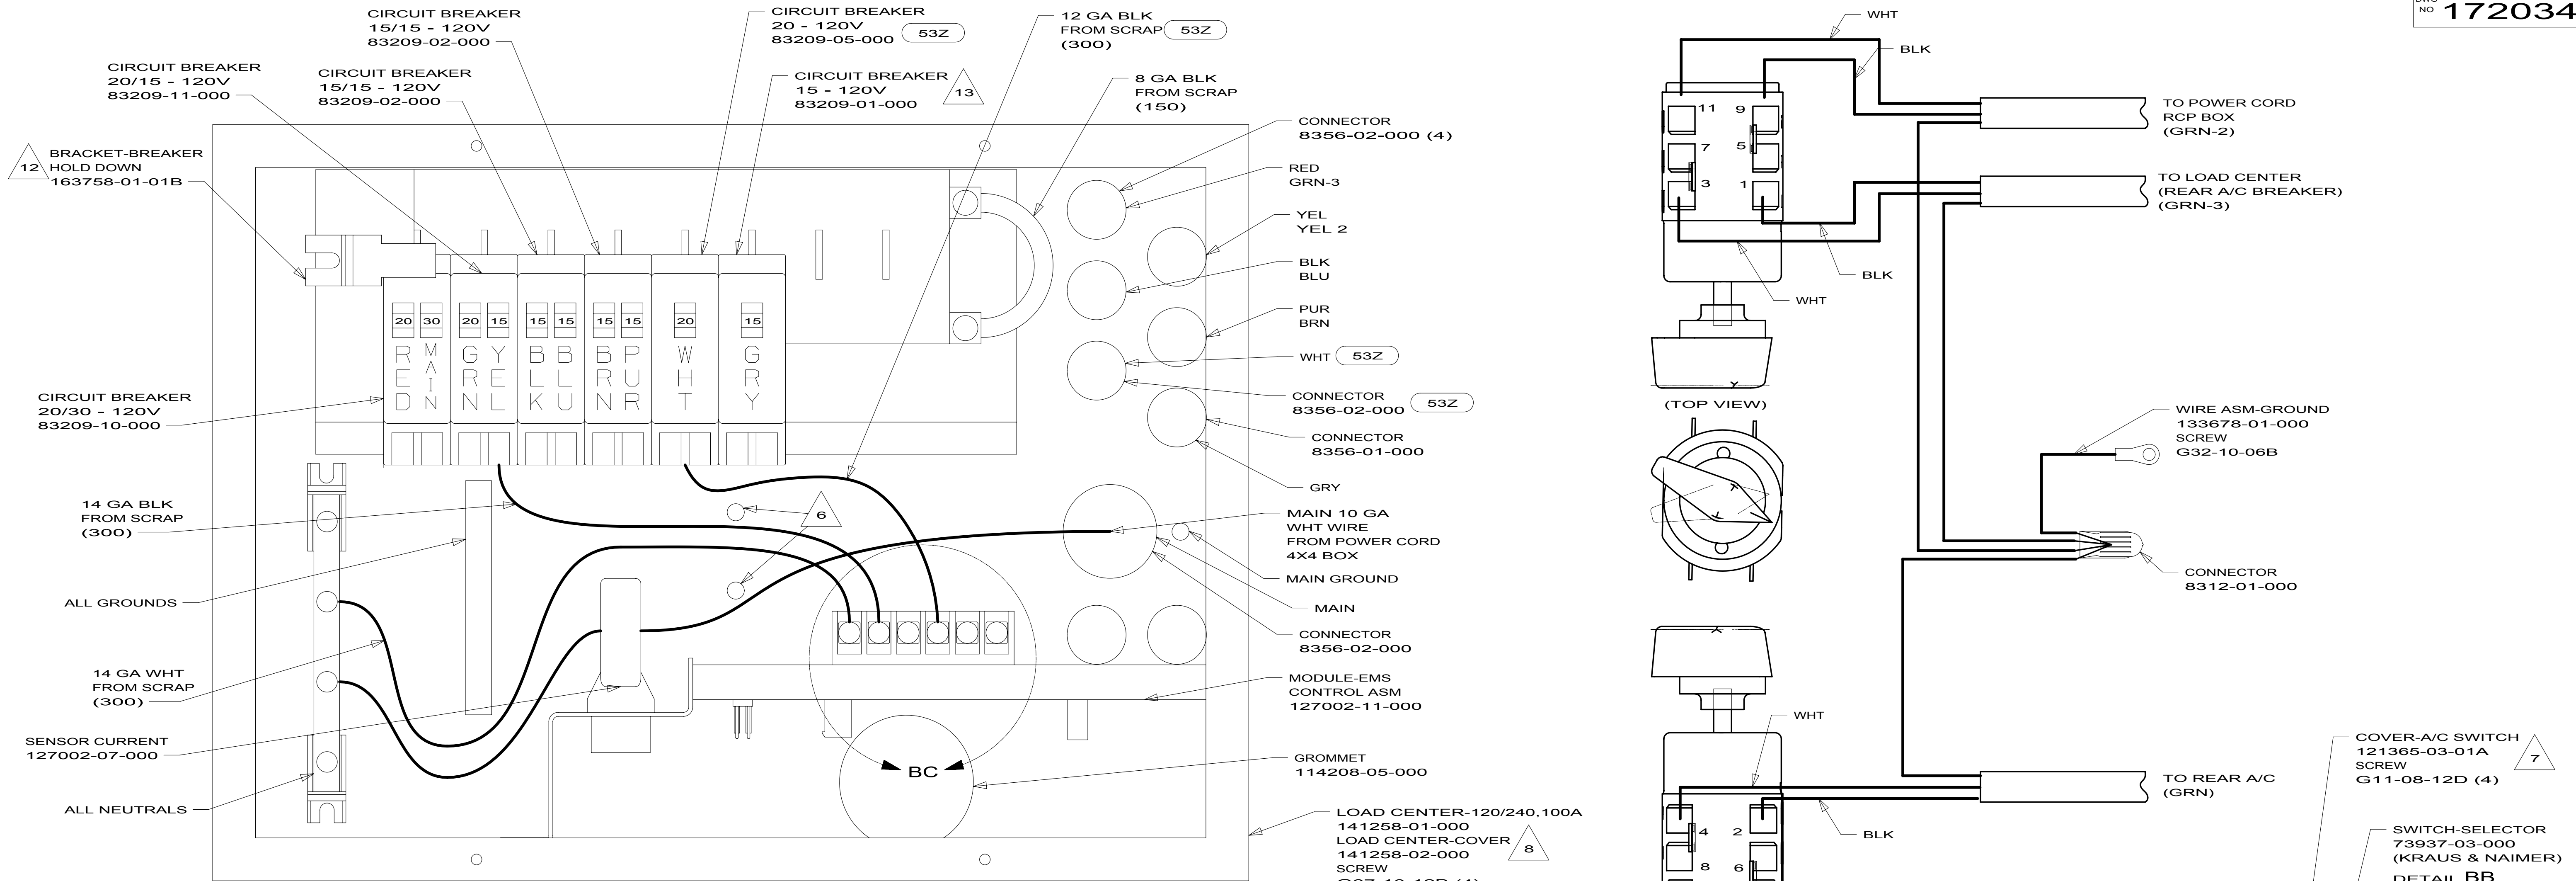

NOTES:

1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
2. GROUND WIRES ARE NOT SHOWN FOR CLARITY.
3. ALL WIRES TO BE CLAMPED WITHIN 200MM OF ATS.
4. ALL 110V STRANDED WIRE W/O TERMINALS TO BE STRIPPED 10MM AND SOLDER DIPPED.
5. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS

DETAIL BC 53Z

13 USED ON D37L ONLY

12 LOOSEN LEFT BUSS BAR MOUNTING SCREW, INSERT BRACKET-BREAKER HOLD DOWN UNDER SCREW, ORIENTATE BRACKET TOWARD MAIN BREAKER AS SHOWN AND TIGHTEN SCREW.

DETAIL BB

VIEW BA

REAR A/C SELECTOR SWITCH

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


14C	FIREPLACE-ELECTRIC
53Z	WTR HTR-6GAL/110/LP/MTR/AUTO
29R	AC HEAT PUMP-2 HI EFFICIENCY
276	A/C ROOF-HI EFF (2) W/EMS
12D	ELECTRICAL SYSTEM 30 AMP
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA

10 D-SERIES

DO NOT SCALE DRAWING


TITLE: **LOAD CENTER/ATS ASM**

SHEET 2 PART NO **172034** REV

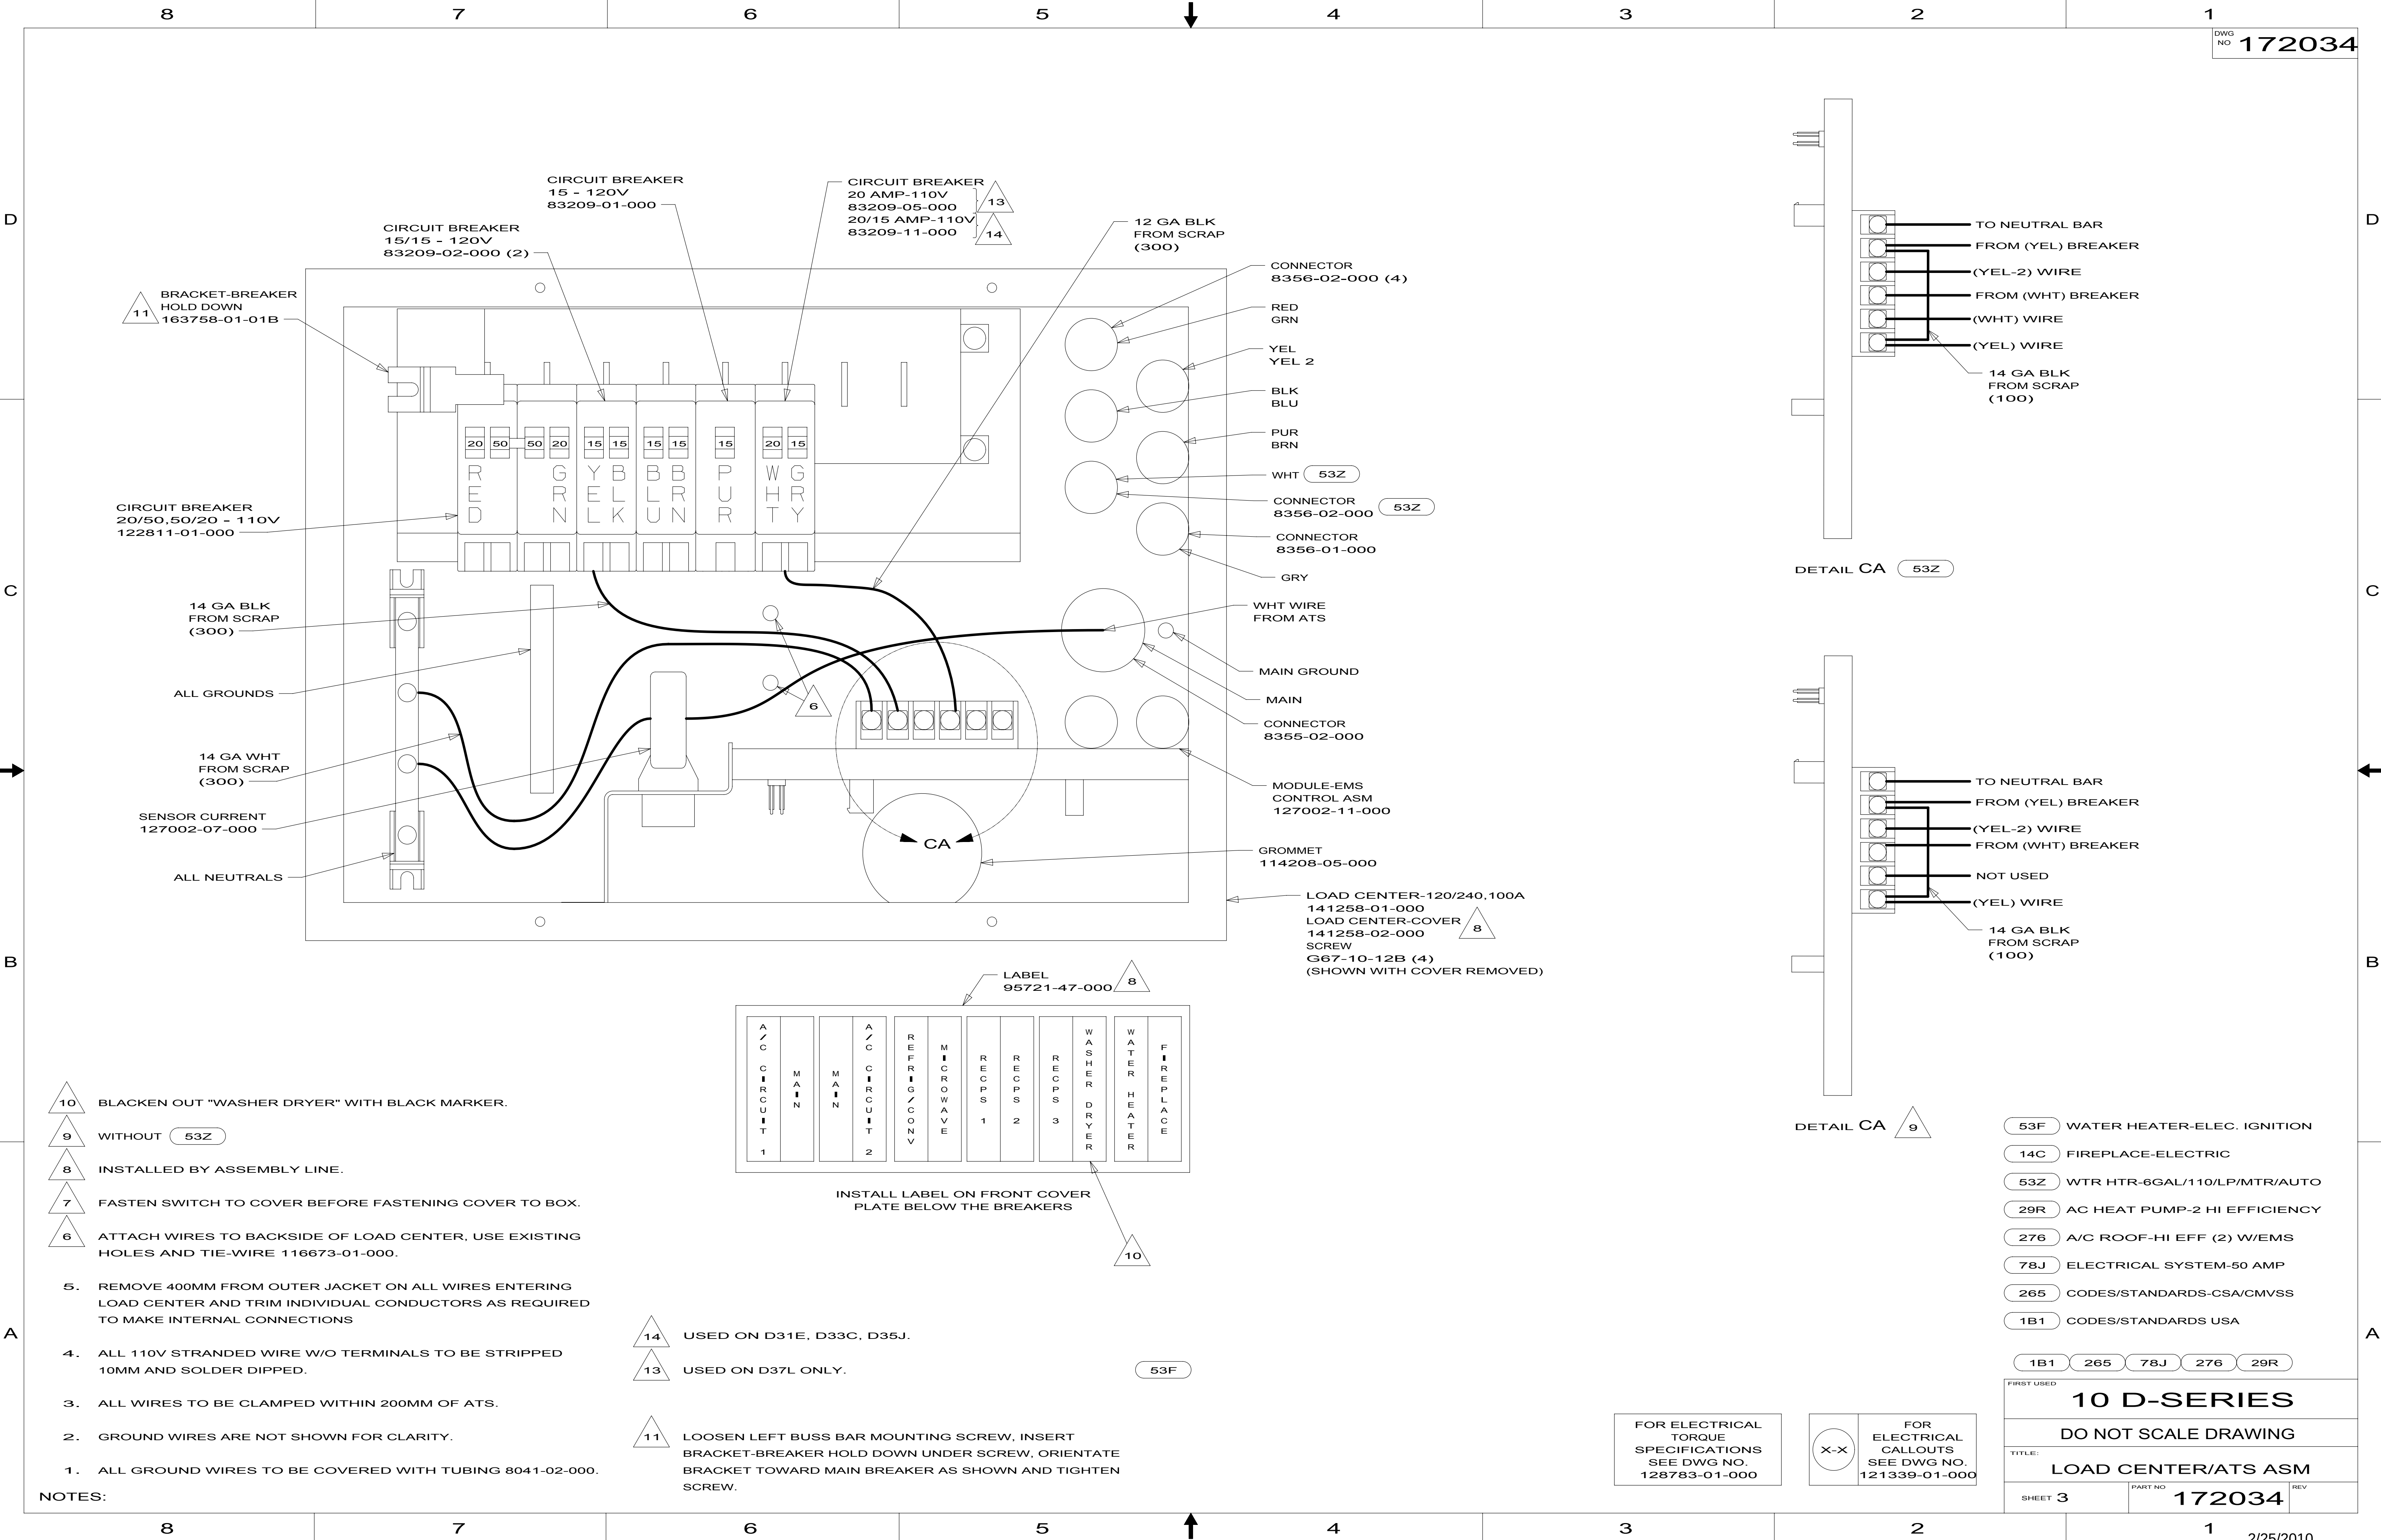


- NOTES:
- 1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 - 2. GROUND WIRES ARE NOT SHOWN FOR CLARITY.
 - 3. ALL WIRES TO BE CLAMPED WITHIN 200MM OF ATS.
 - 4. ALL 110V STRANDED WIRE W/O TERMINALS TO BE STRIPPED 10MM AND SOLDER DIPPED.
 - 5. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS
- 10 BLACKEN OUT "WASHER DRYER" WITH BLACK MARKER.
- 9 WITHOUT 53Z
- 8 INSTALLED BY ASSEMBLY LINE.
- 7 FASTEN SWITCH TO COVER BEFORE FASTENING COVER TO BOX.
- 6 ATTACH WIRES TO BACKSIDE OF LOAD CENTER, USE EXISTING HOLES AND TIE-WIRE 116673-01-000.


- 14 USED ON D31E, D33C, D35J.
- 13 USED ON D37L ONLY.
- 11 LOOSEN LEFT BUSS BAR MOUNTING SCREW, INSERT BRACKET-BREAKER HOLD DOWN UNDER SCREW, ORIENTATE BRACKET TOWARD MAIN BREAKER AS SHOWN AND TIGHTEN SCREW.

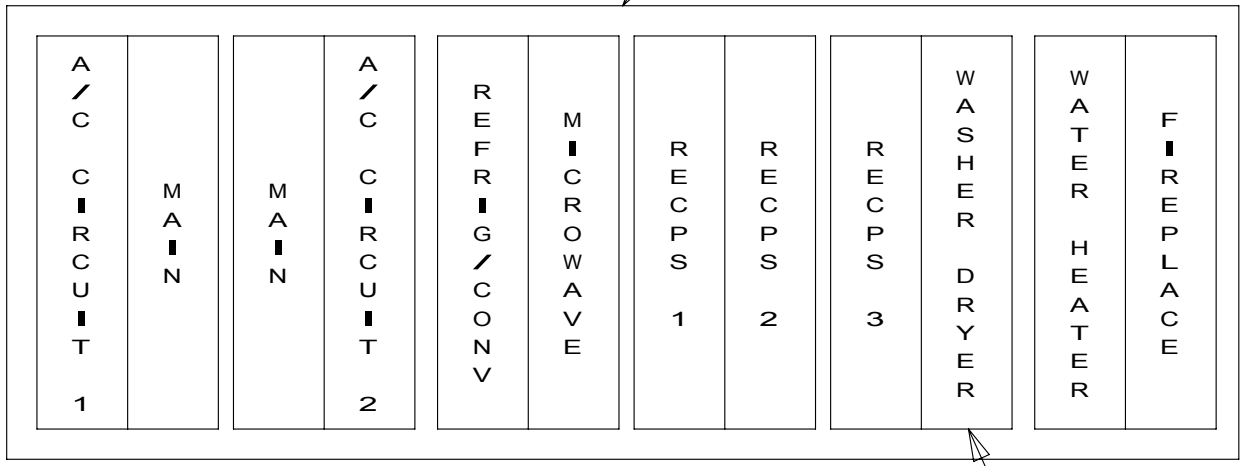

INSTALL LABEL ON FRONT COVER PLATE BELOW THE BREAKERS

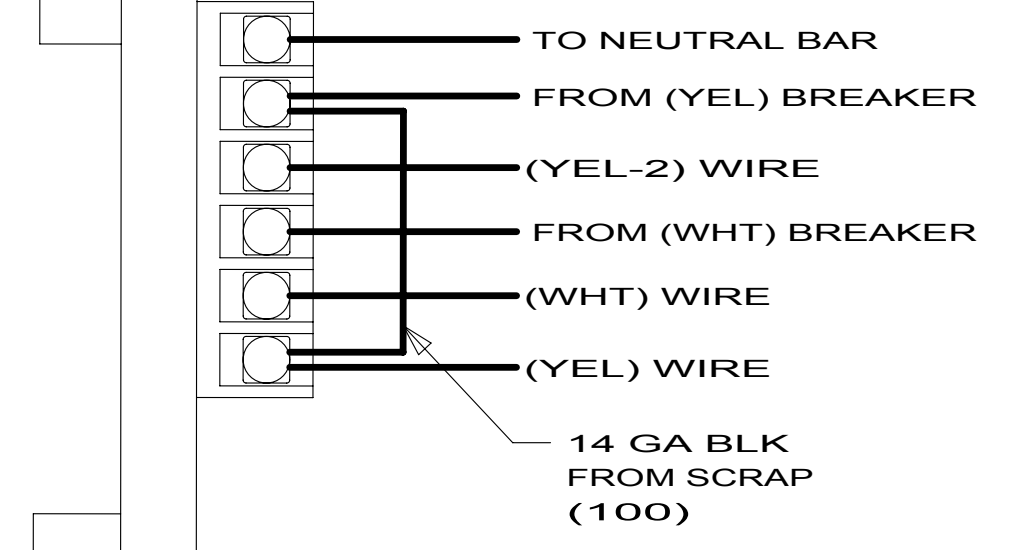

DETAIL CA 53Z

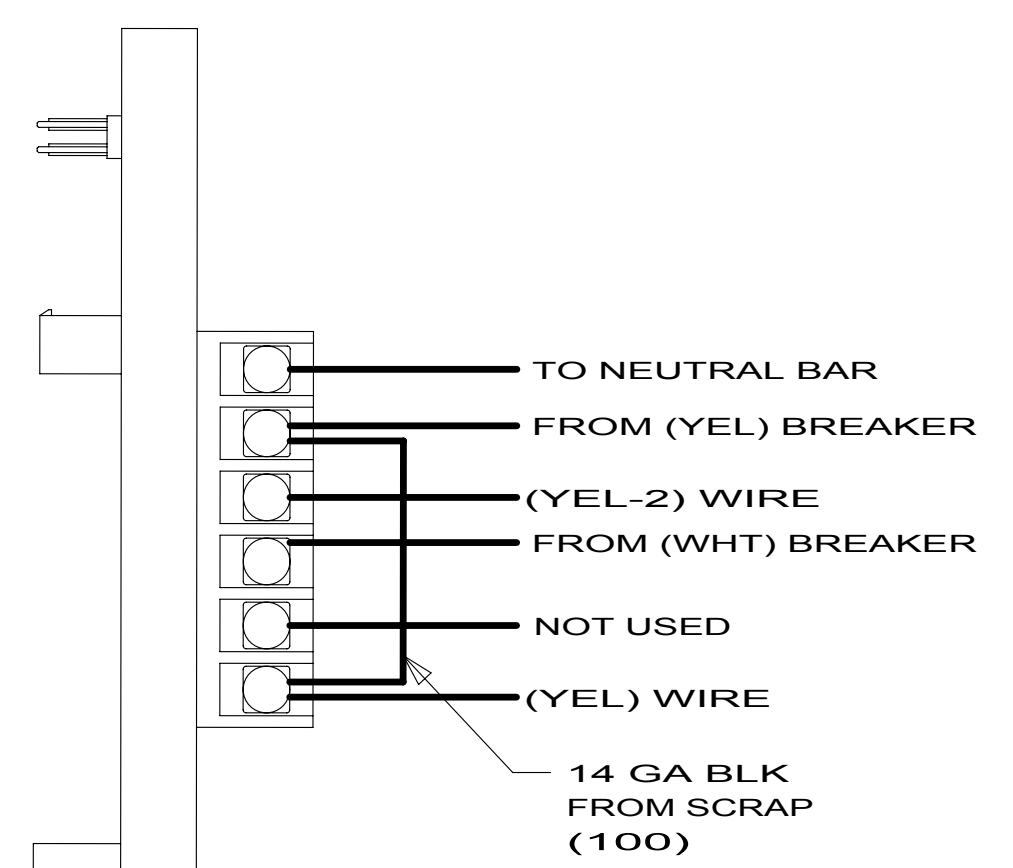


DETAIL CA 9

- 53F WATER HEATER-ELEC. IGNITION
- 14C FIREPLACE-ELECTRIC
- 53Z WTR HTR-6GAL/110/LP/MTR/AUTO
- 29R AC HEAT PUMP-2 HI EFFICIENCY
- 276 A/C ROOF-HI EFF (2) W/EMS
- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FIRST USED		
10 D-SERIES		
DO NOT SCALE DRAWING		
TITLE: LOAD CENTER/ATS ASM		
SHEET 3	PART NO 172034	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


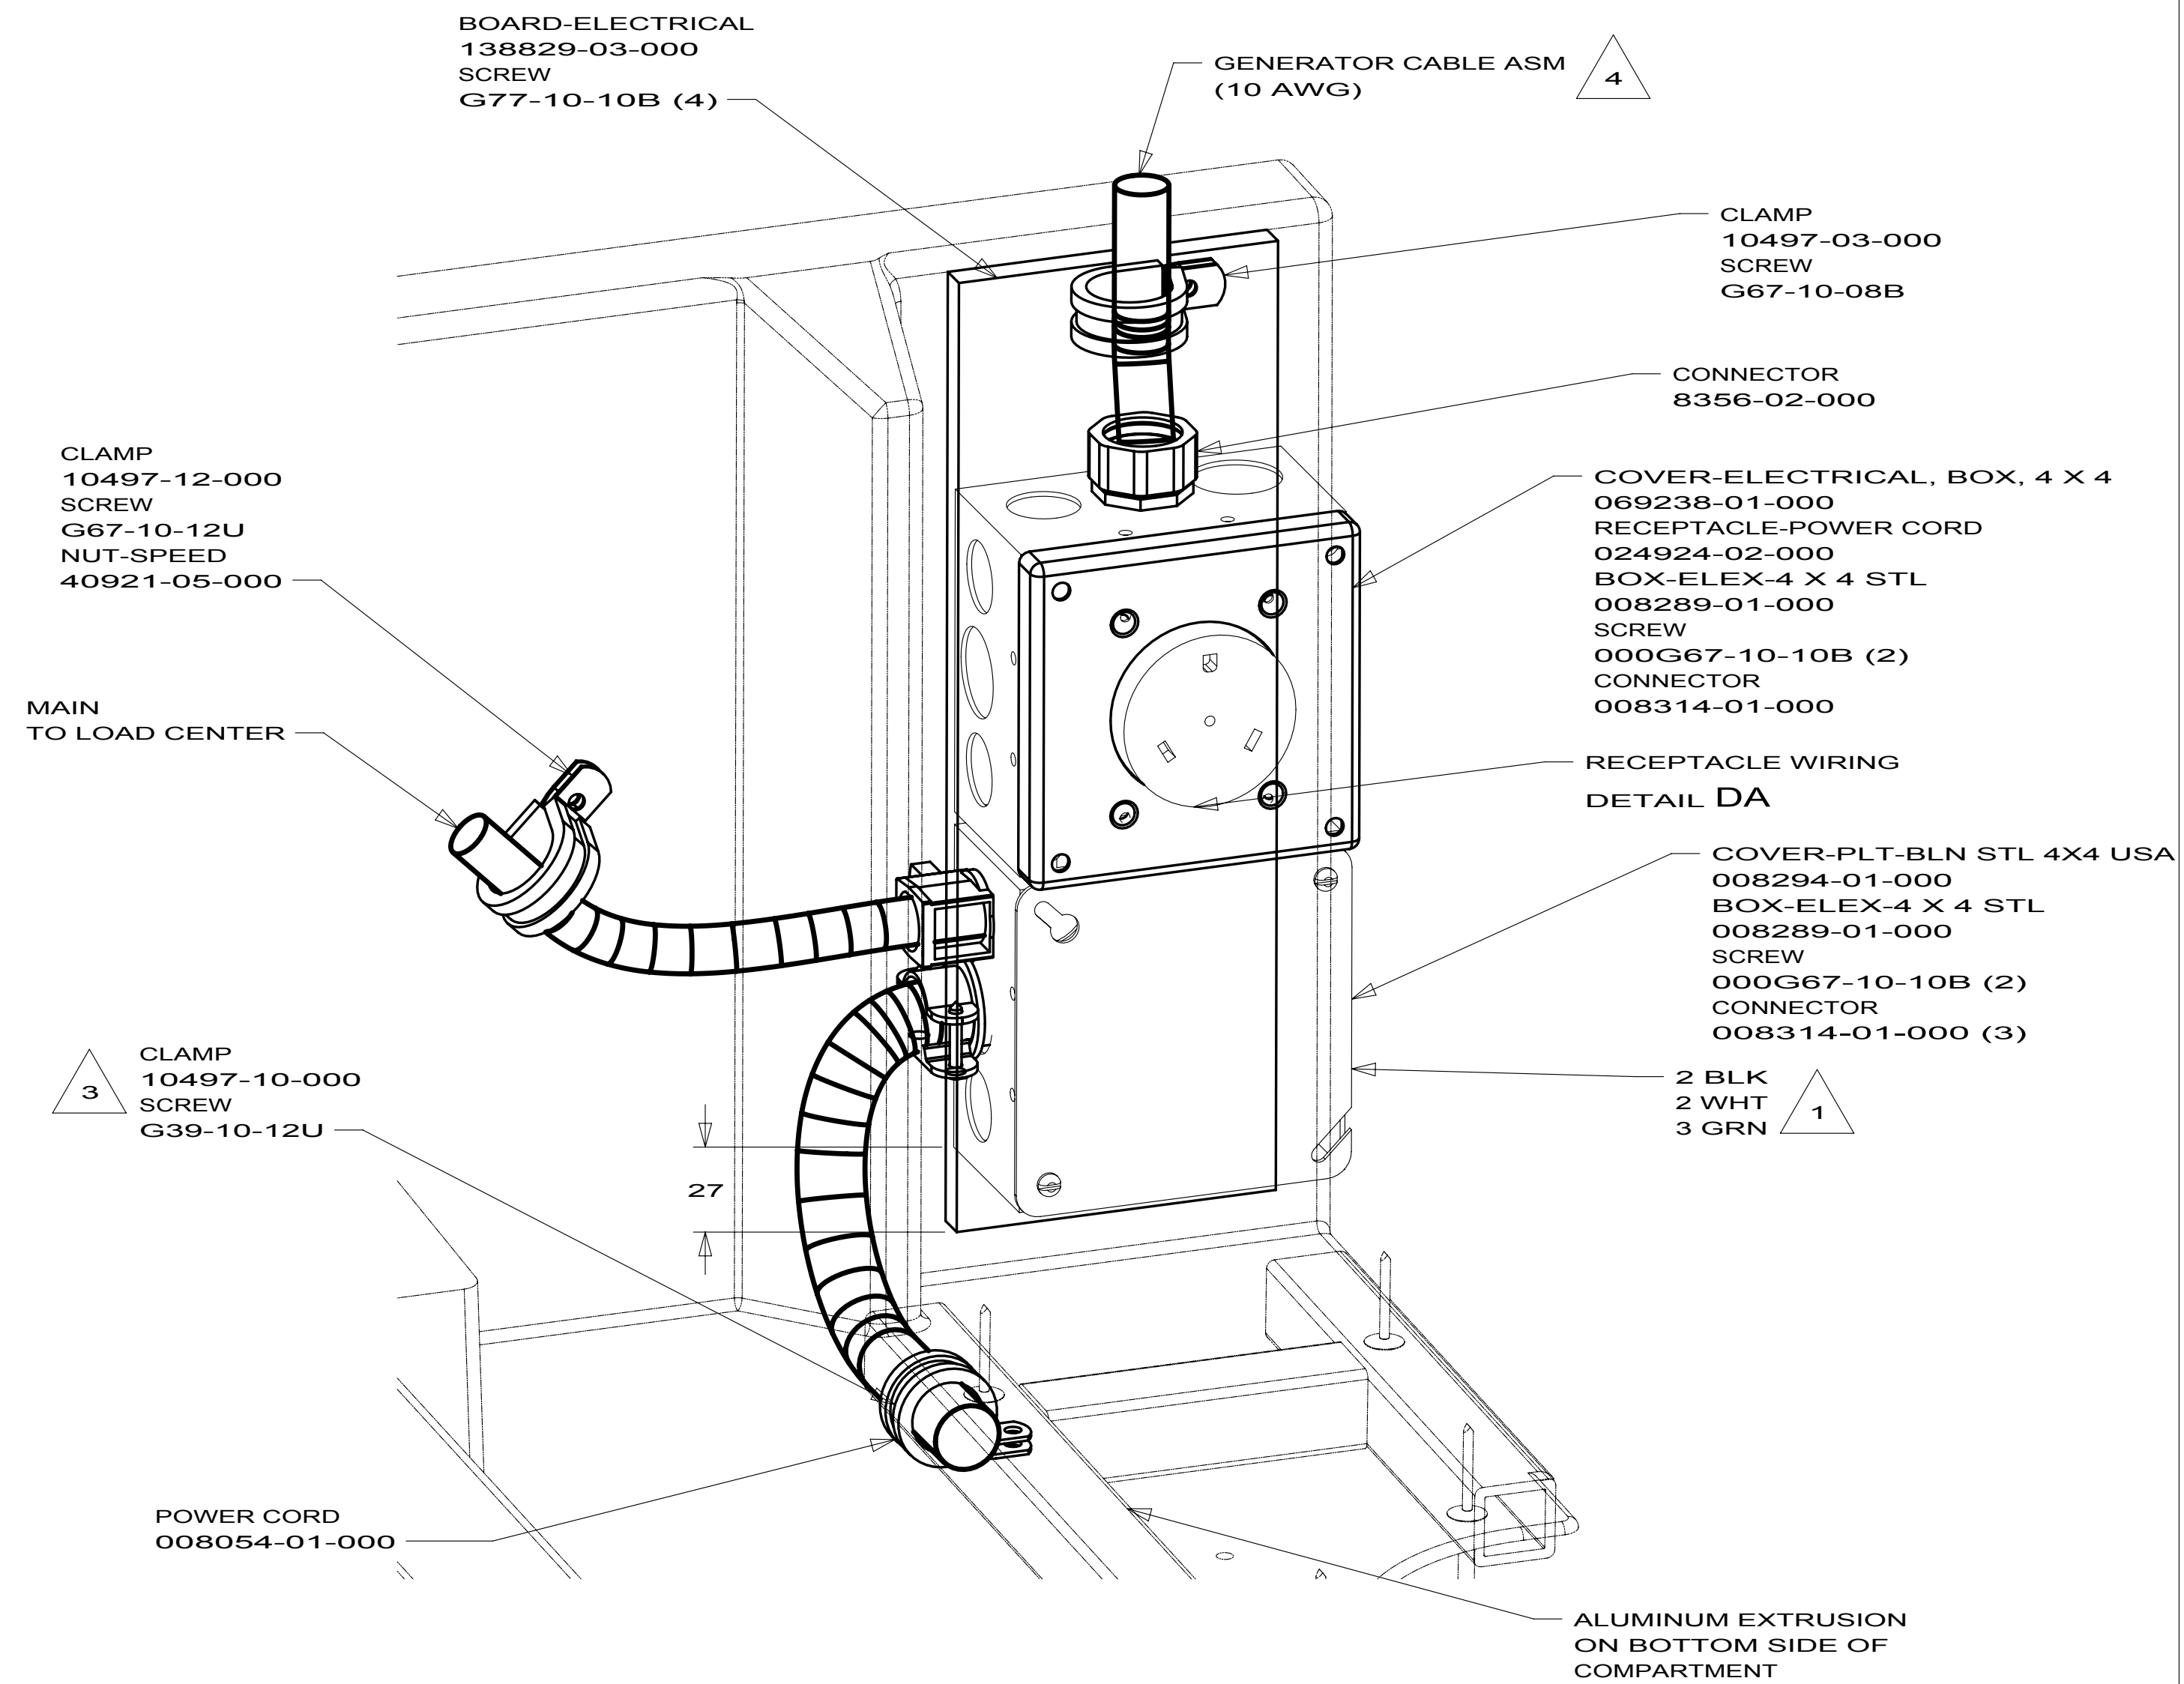


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

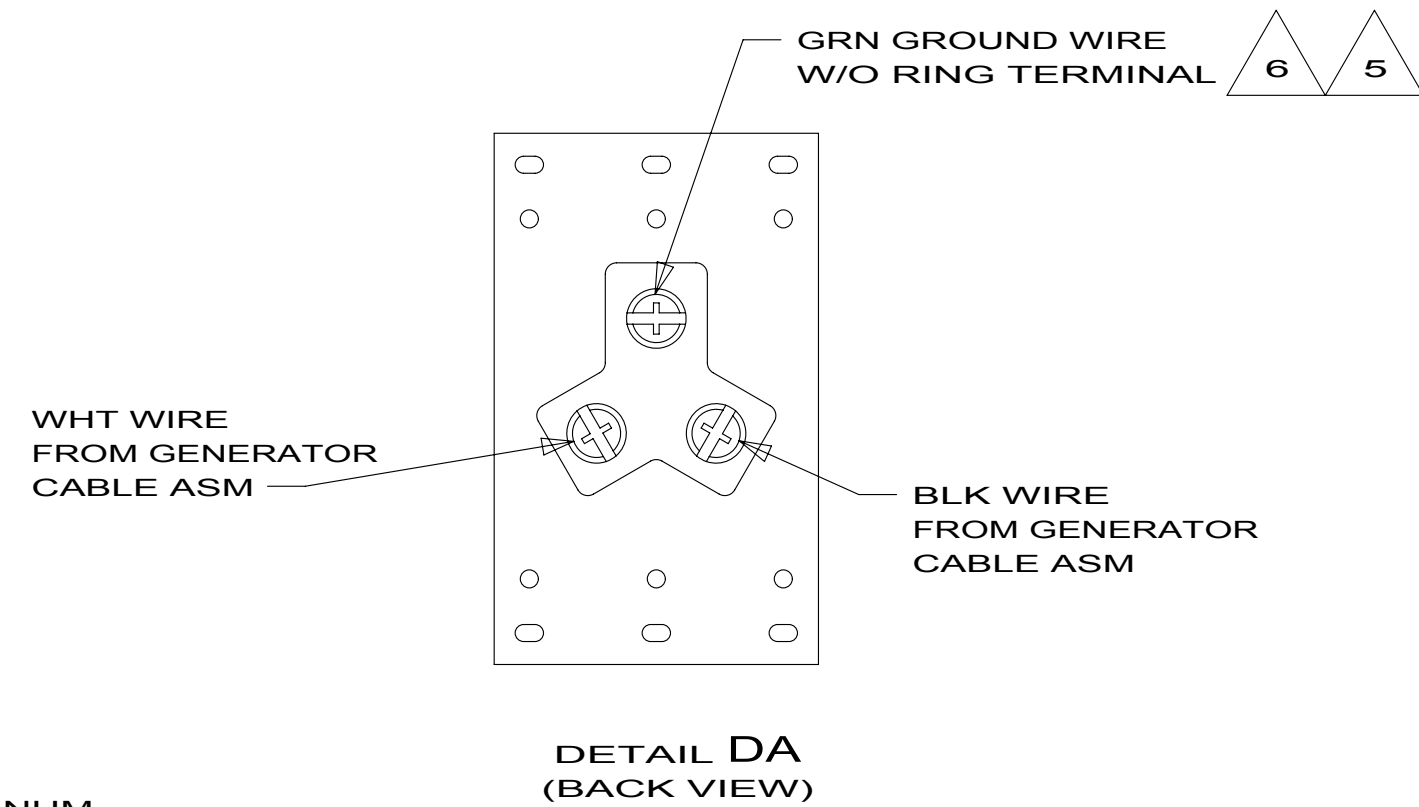

- 6 CONNECT RECEPTACLE GROUND, BOX GROUND, AND GENERATOR GROUND TOGETHER WITH WIRE CONNECTOR.
- 5 PART OF J-RCP CALLOUT.
- 4 SEE WIRING INSTL-BODY, 110V FOR ADDITIONAL INFORMATION.
- 3 SCREW CLAMP ON TO THE FLOOR OF COMPARTMENT INTO THE ALUMINUM EXTRUSION ON BOTTOM SIDE OF COMPARTMENT.
- 2 CONNECT CB-2 BLACK WIRE FROM GENERATOR TO BLACK OF GRN-2 WITH CONNECTOR 8311-01-000 AND WHITES TO WHITES AND GROUNDS TO GROUNDS.
- 1 CONNECT BLACK TO BLACK, WHITE TO WHITE, AND GROUNDS TO GROUNDS.

D31E

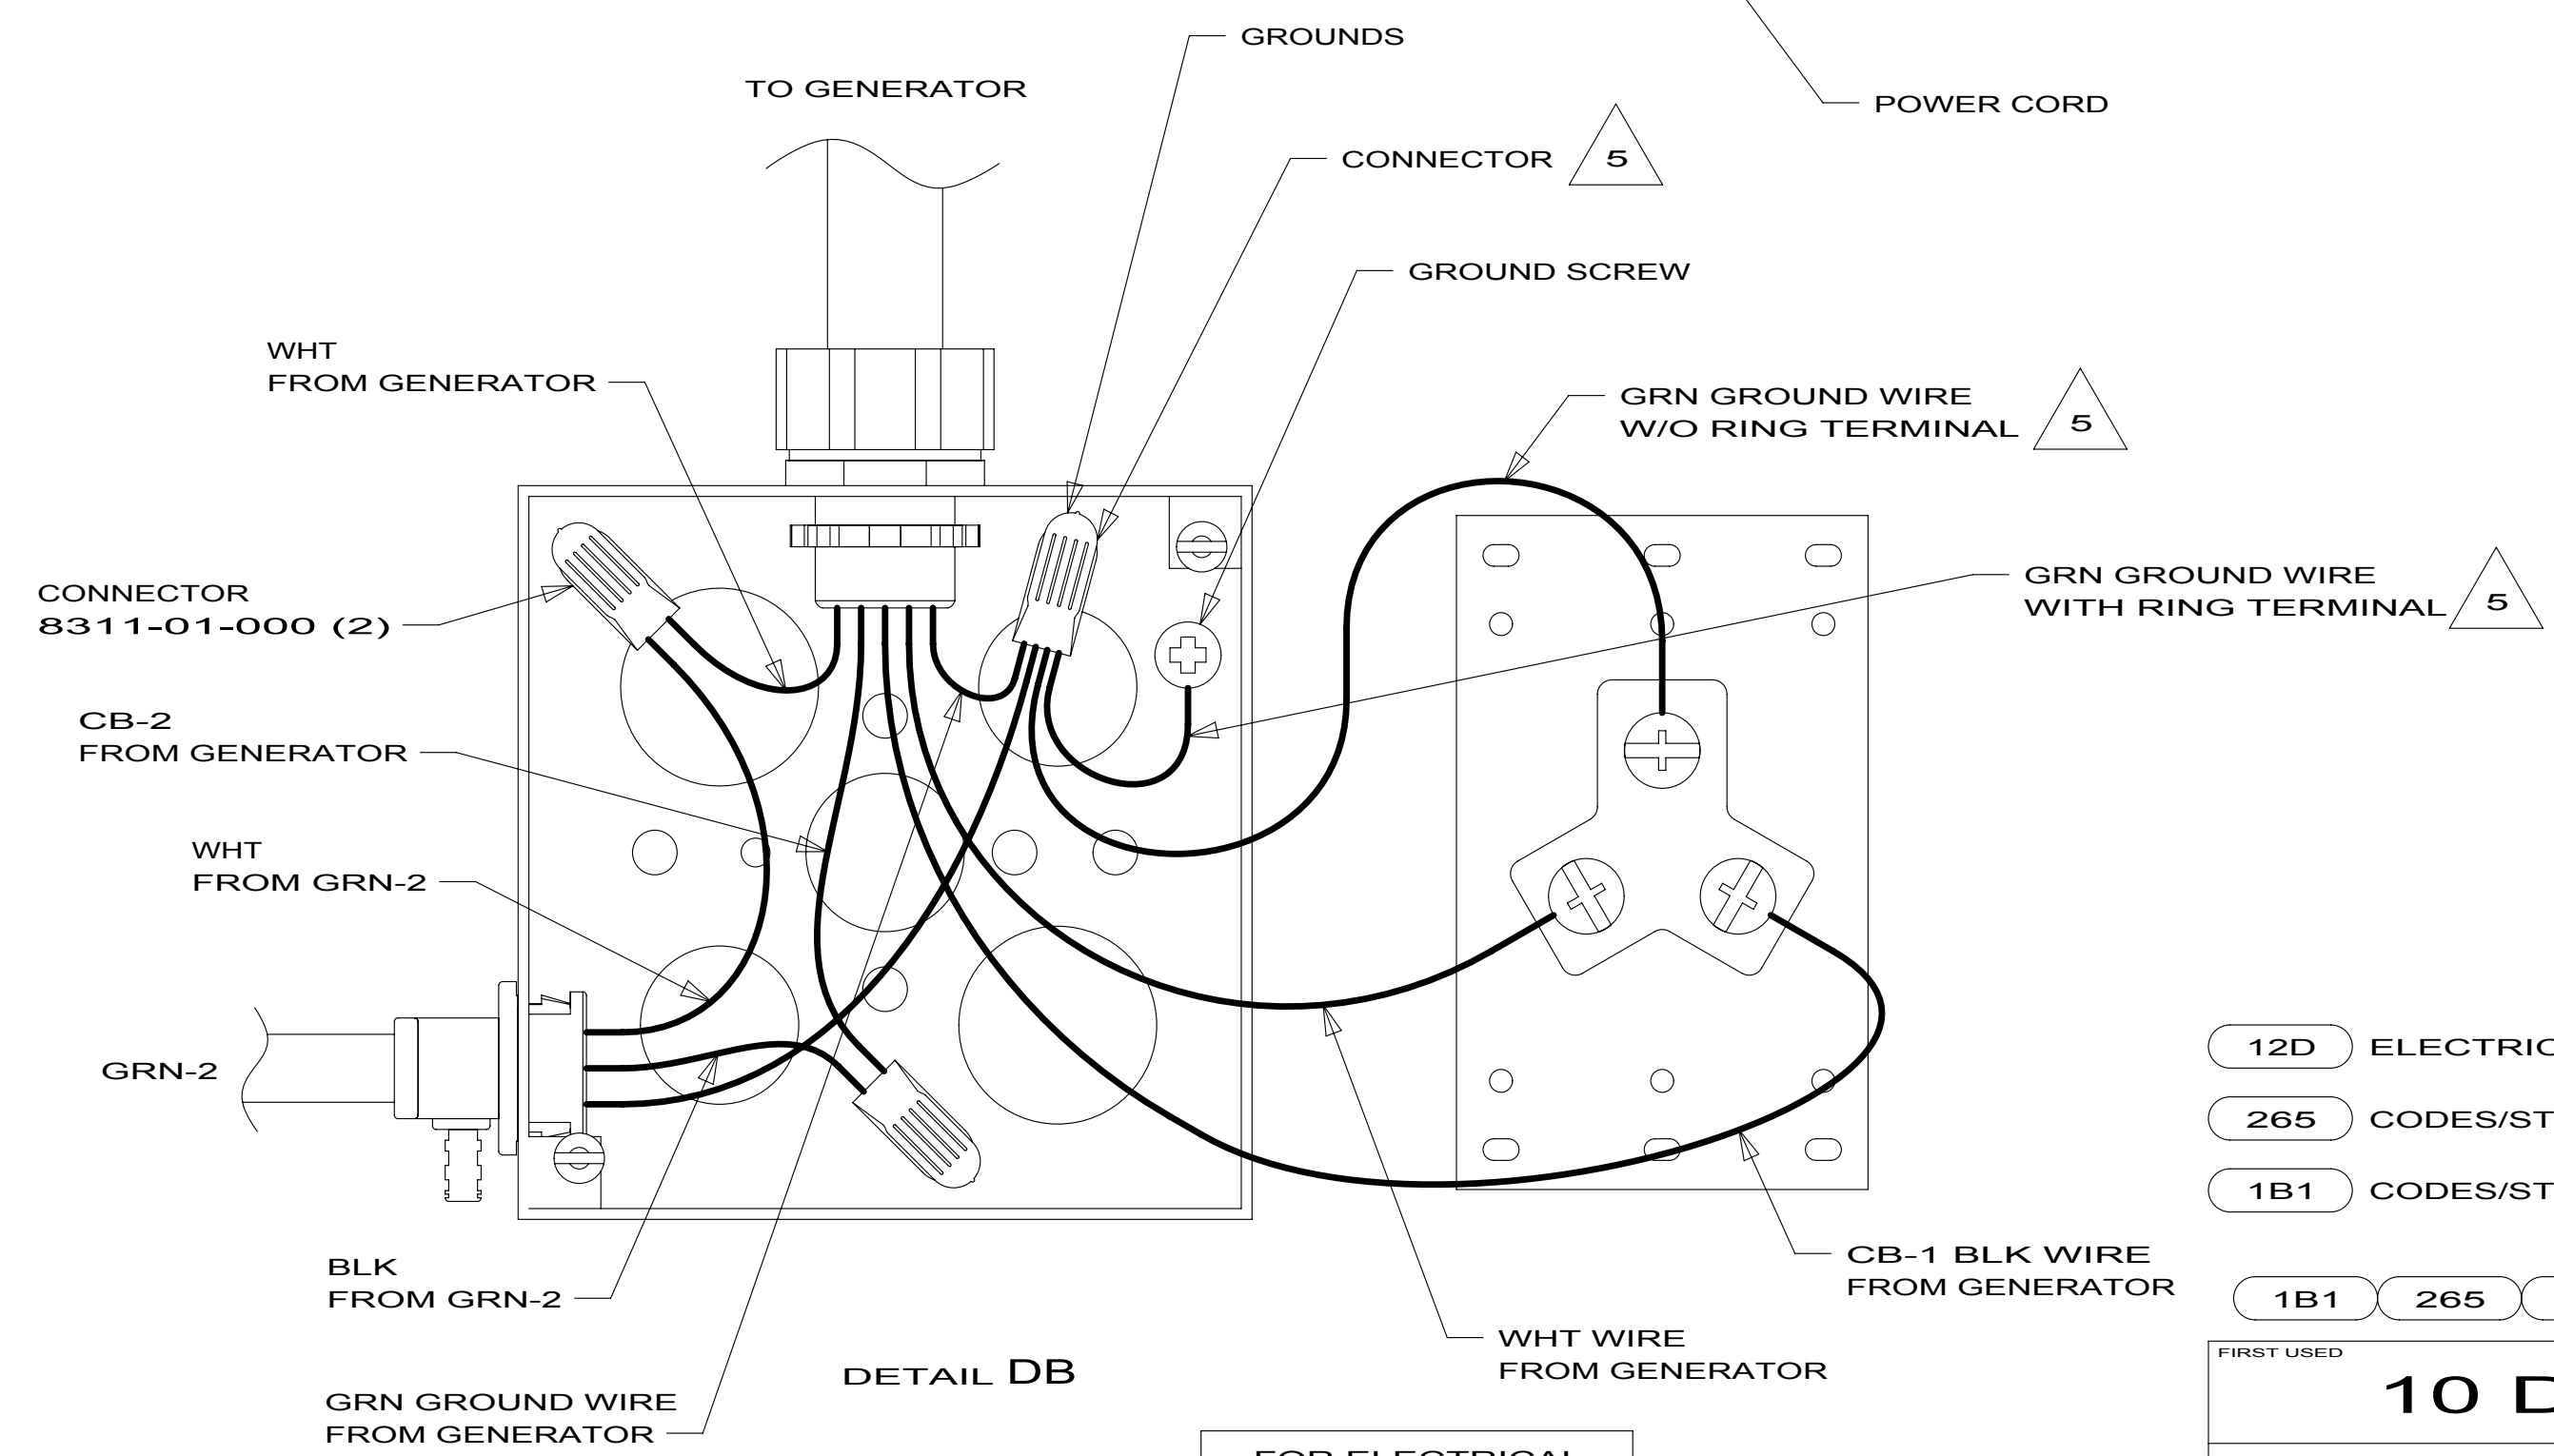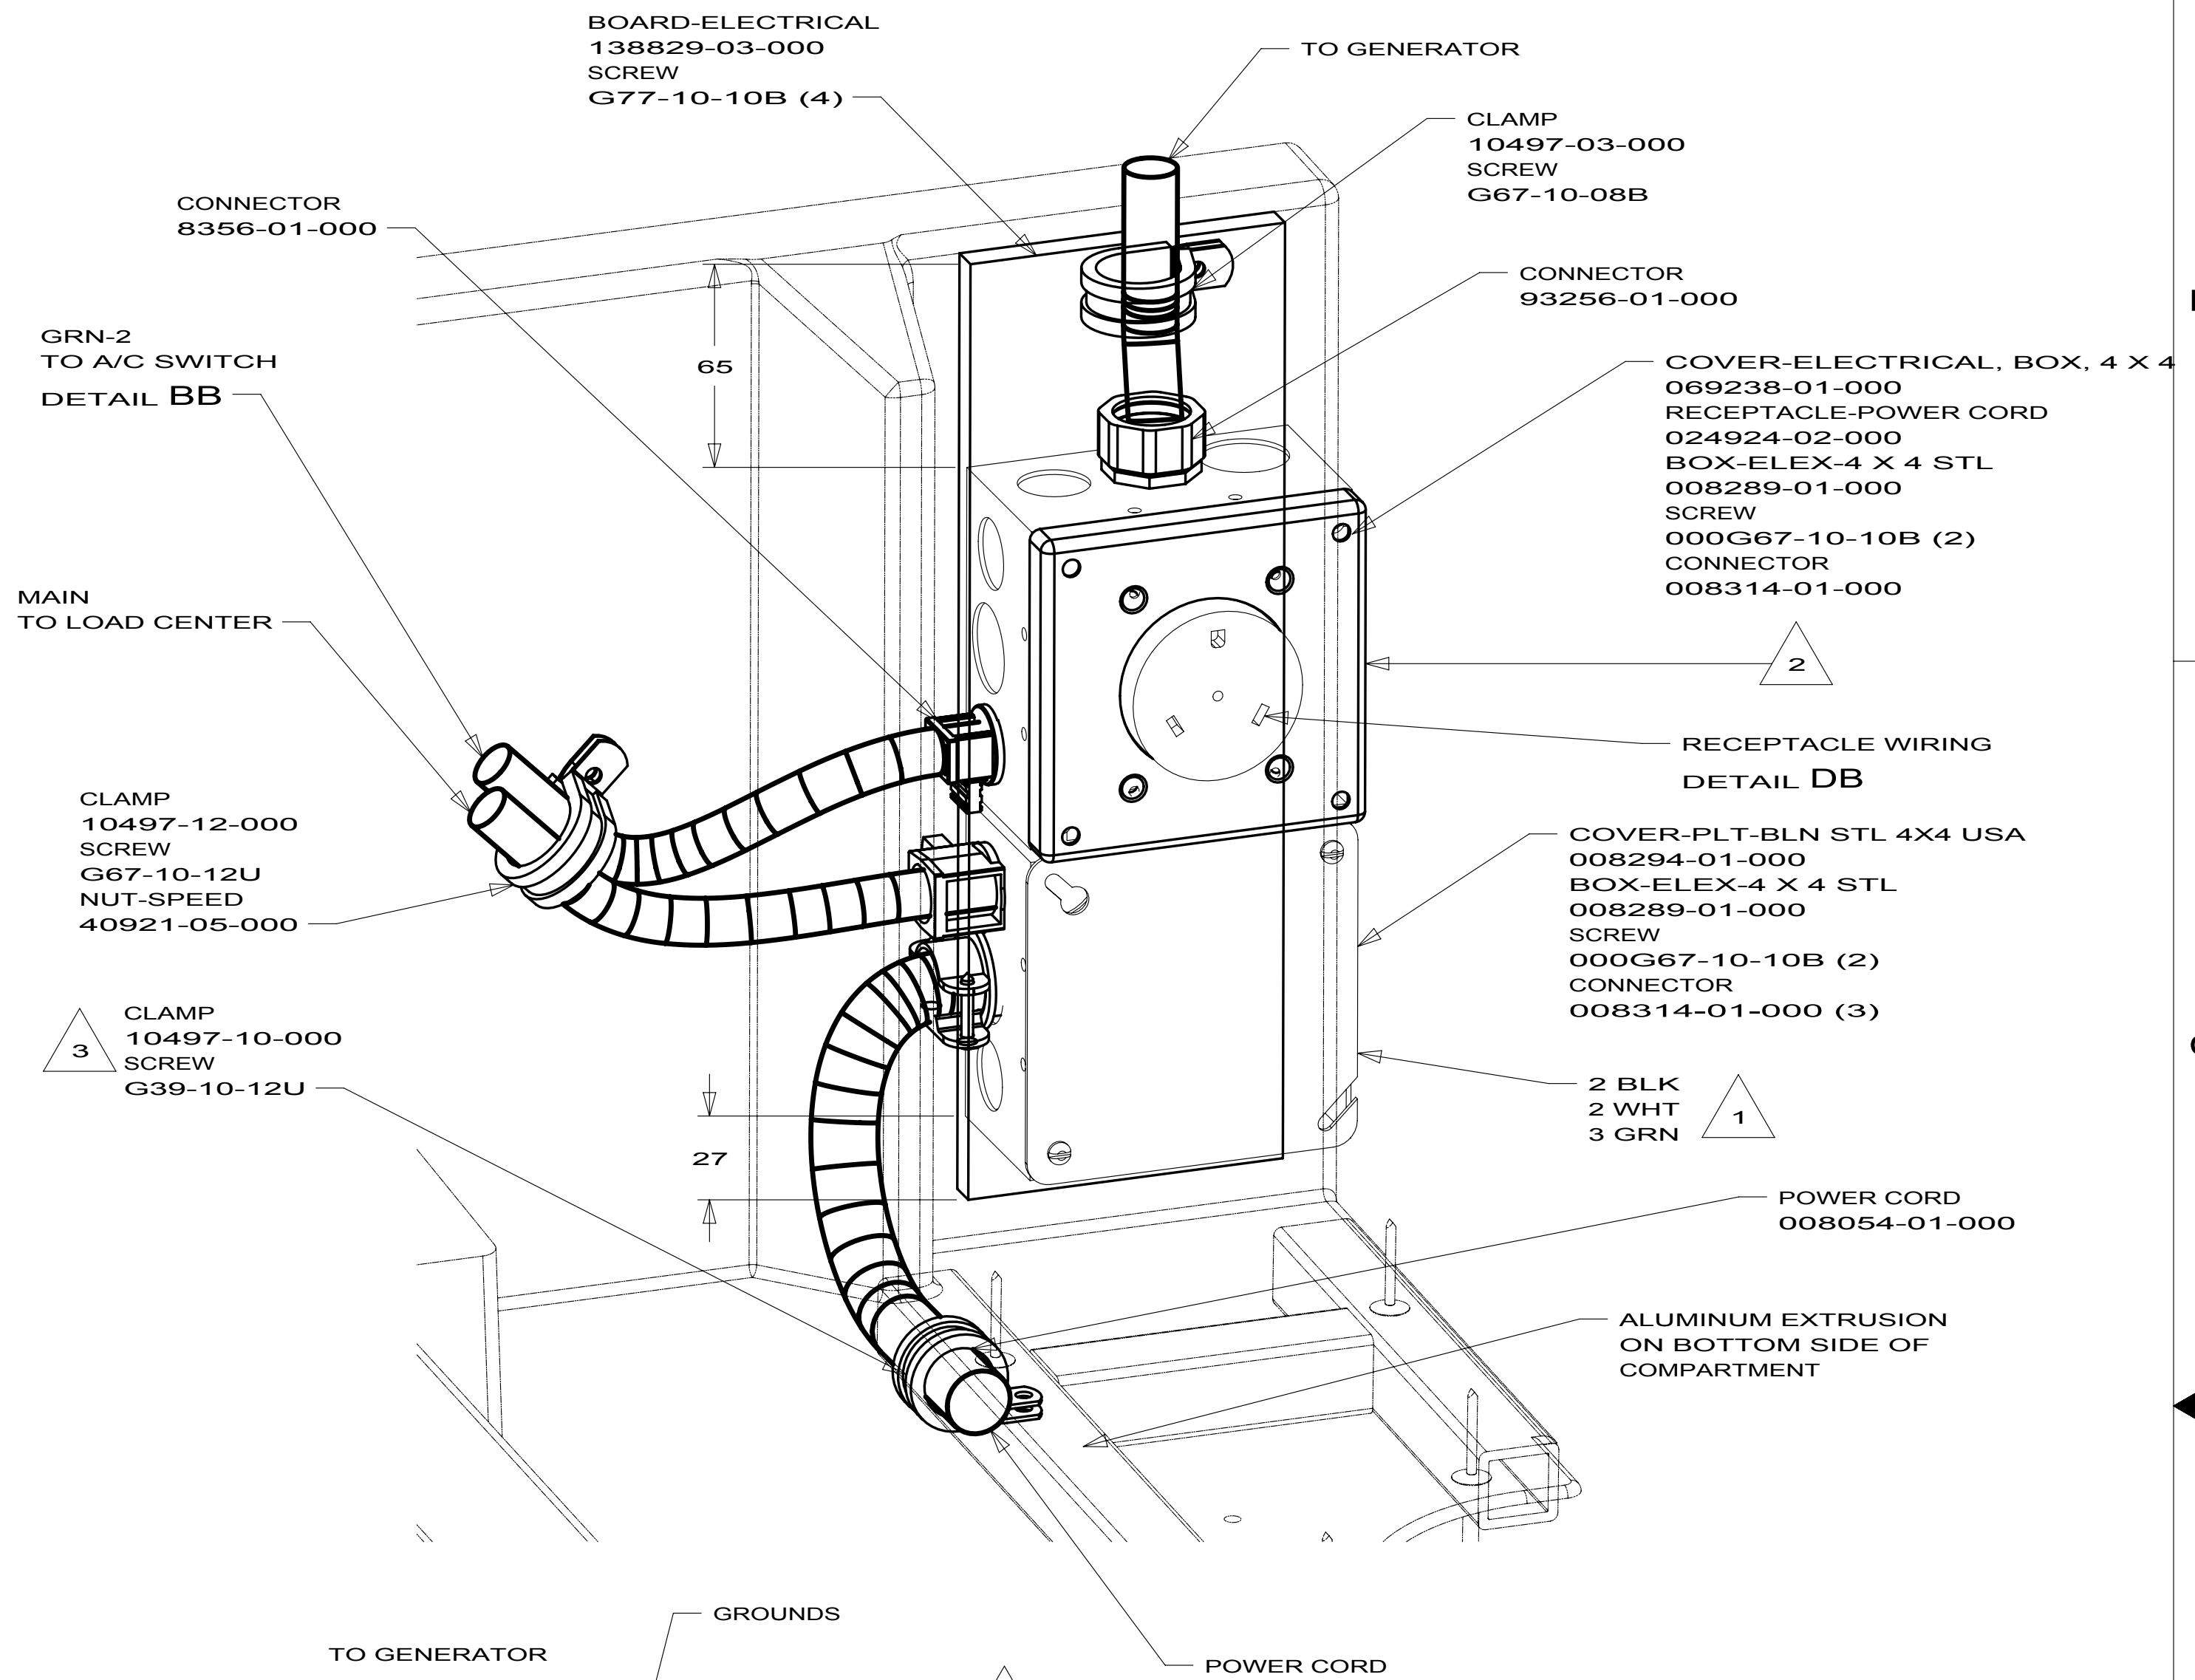



FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- 12D ELECTRICAL SYSTEM 30 AMP
 - 265 CODES/STANDARDS-CSA/CMVSS
 - 1B1 CODES/STANDARDS USA



10 D-SERIES

DO NOT SCALE DRAWING

TITLE: **LOAD CENTER/ATS ASM**

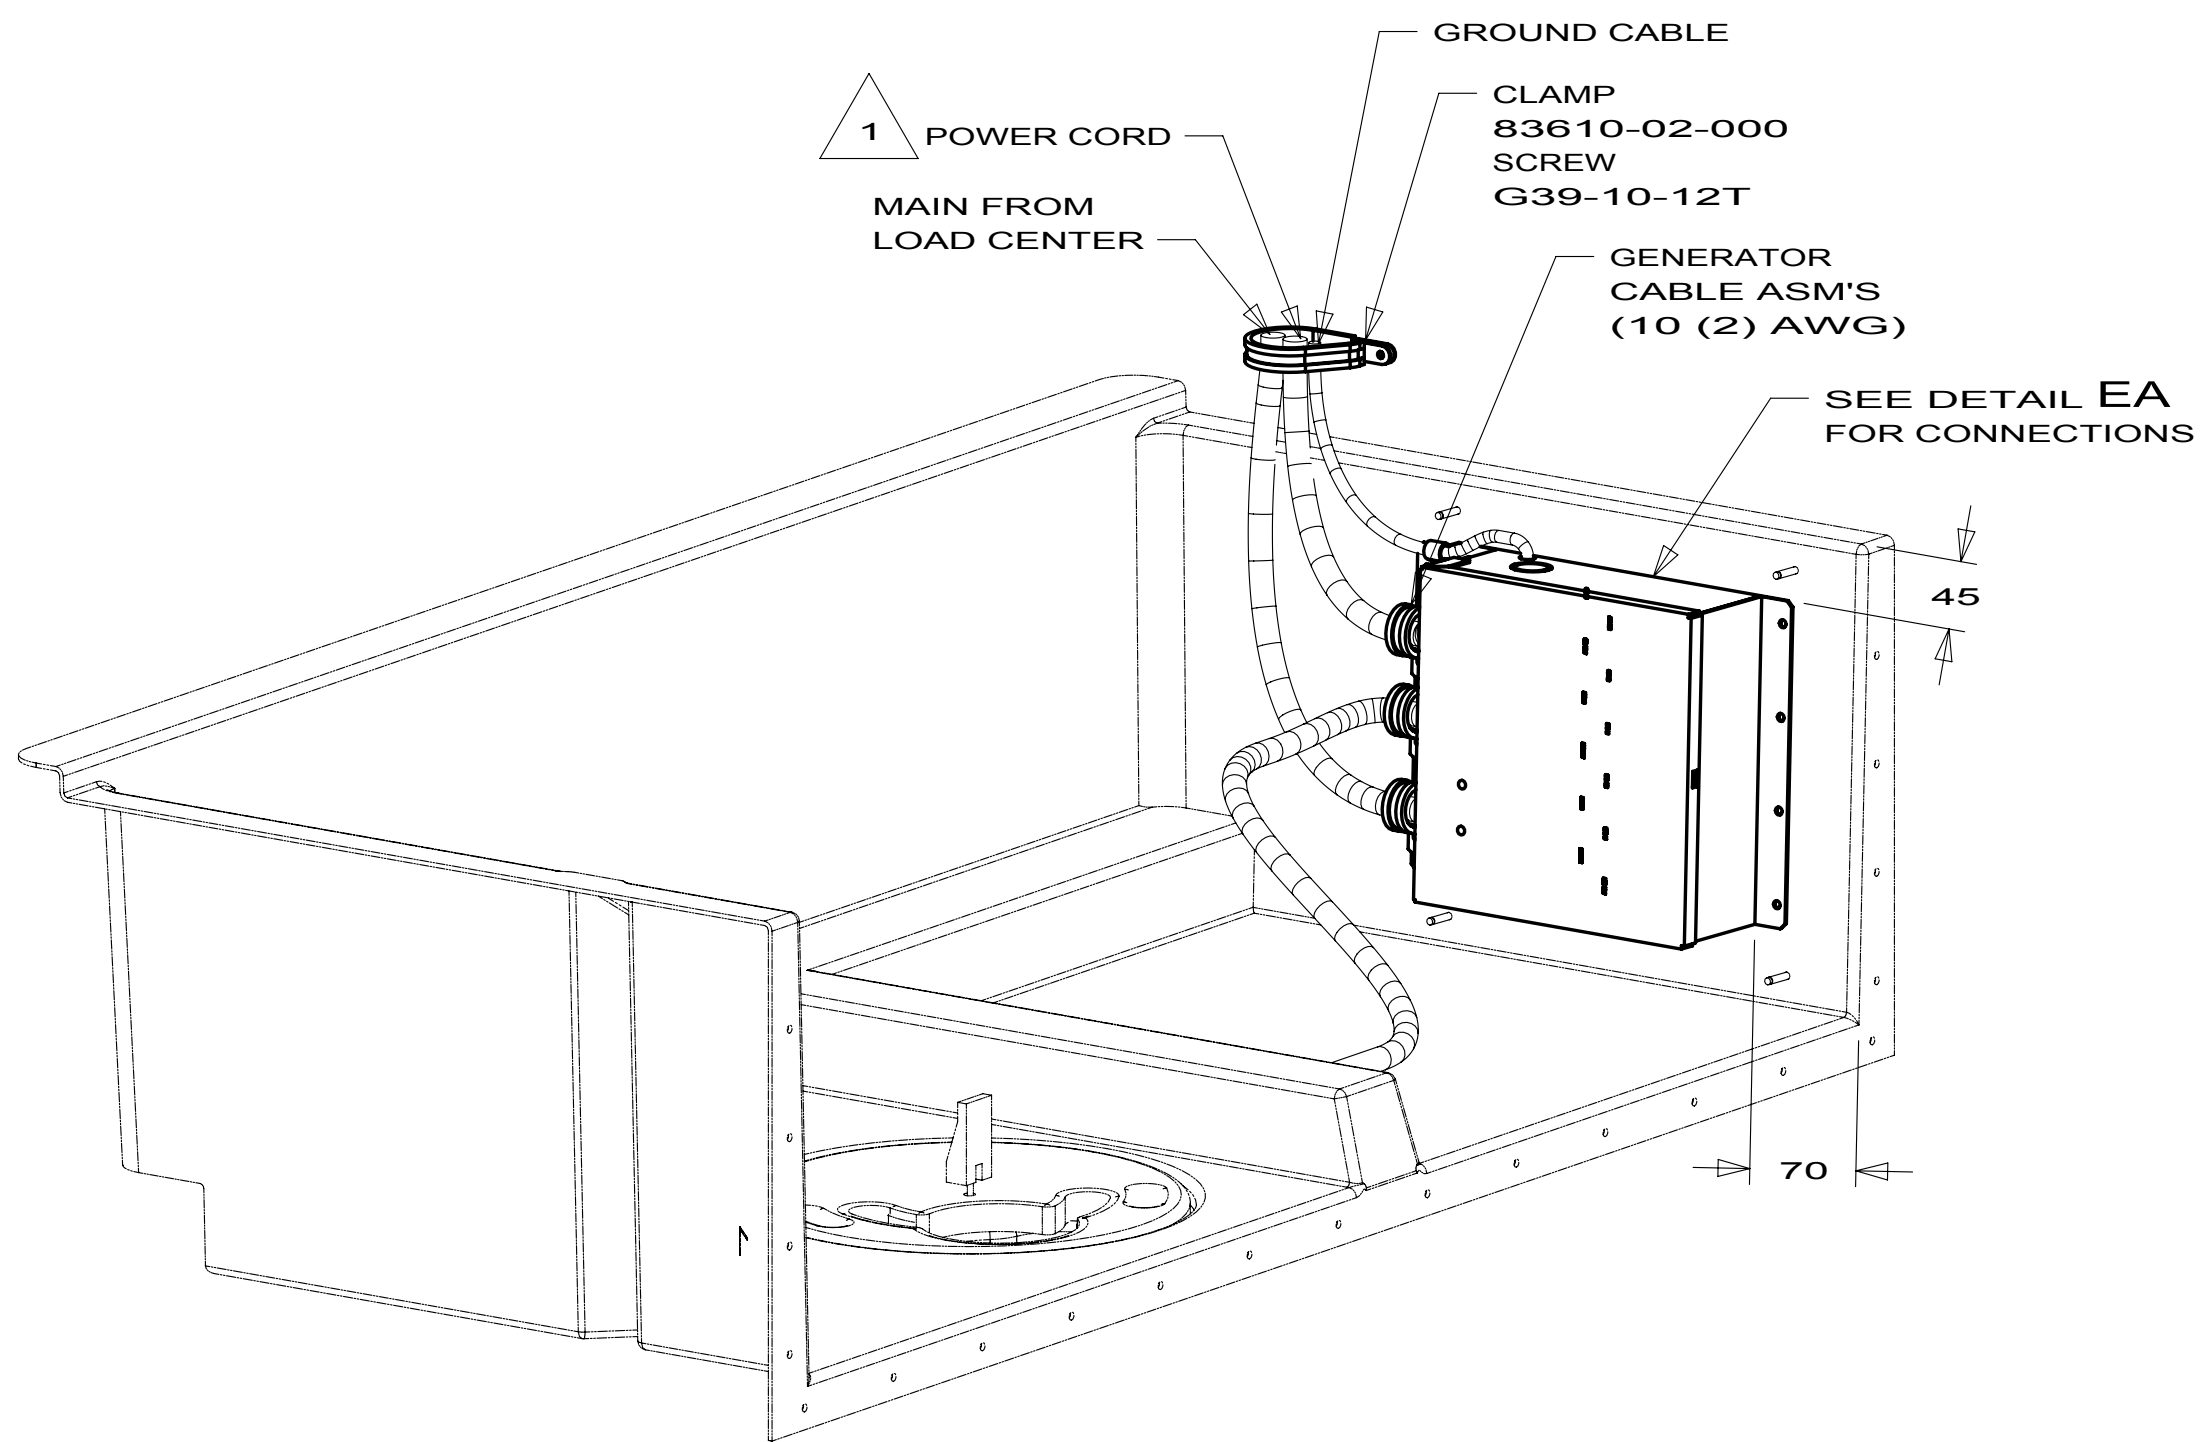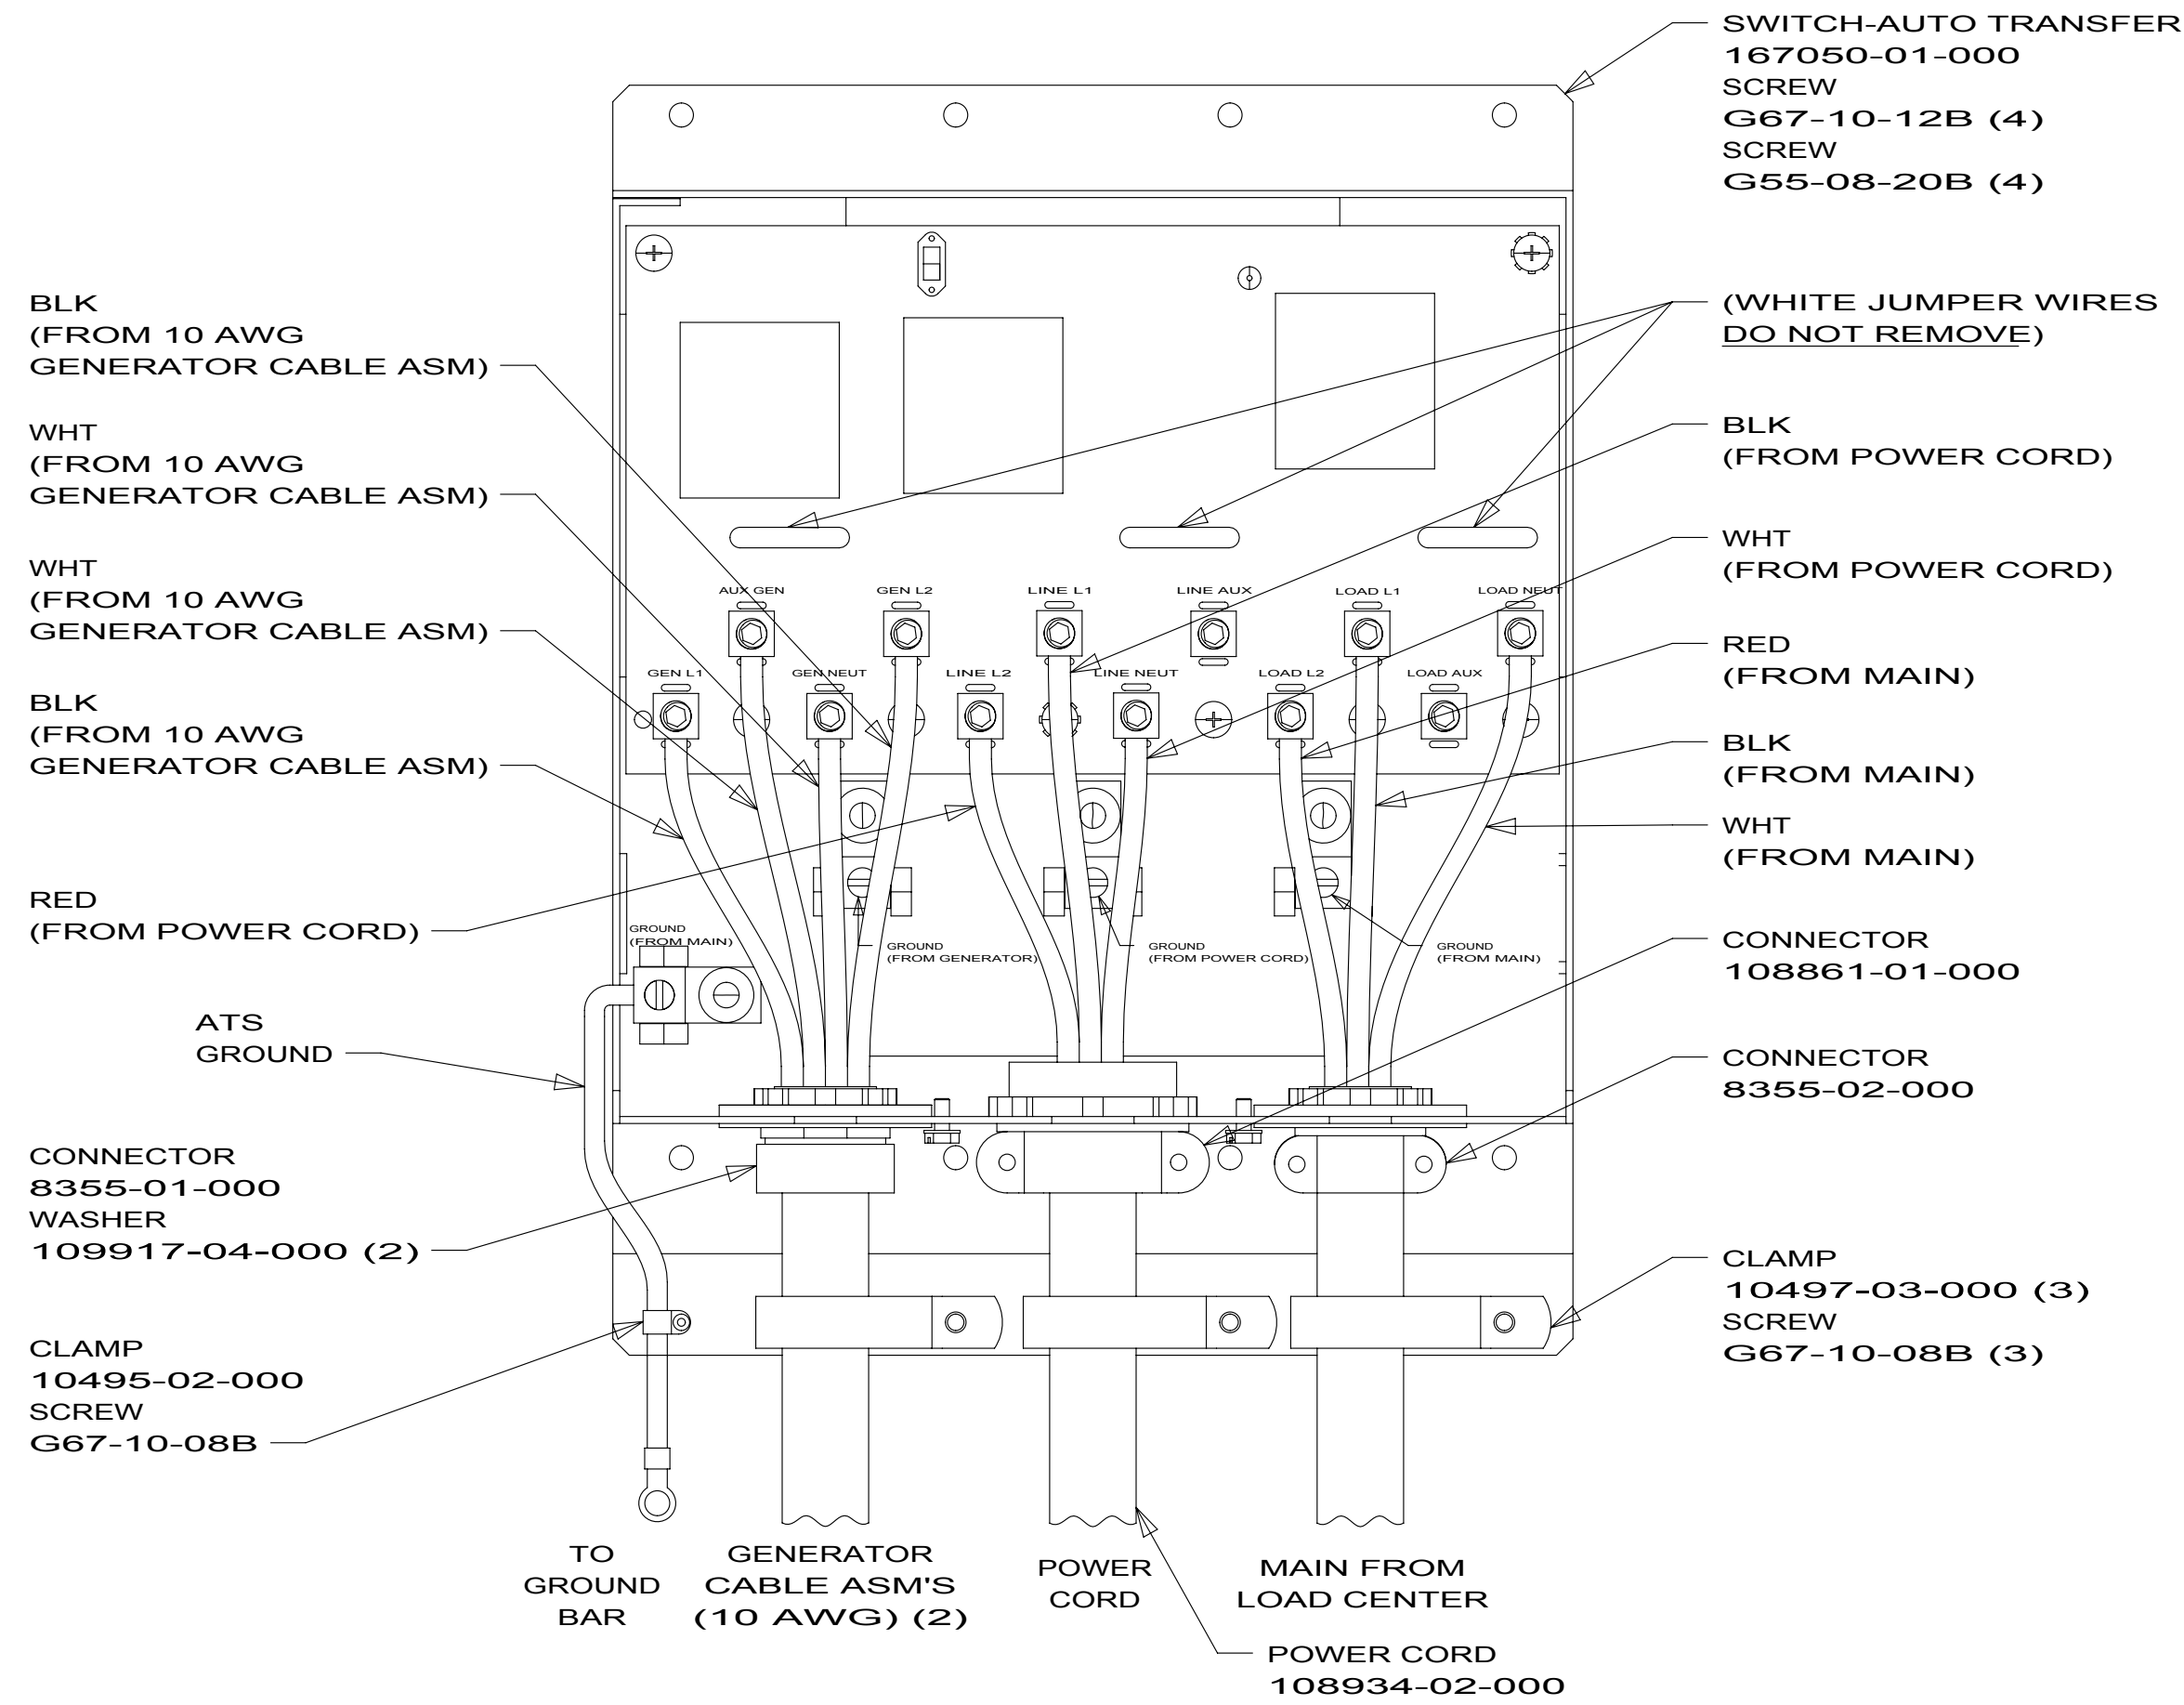

D31E

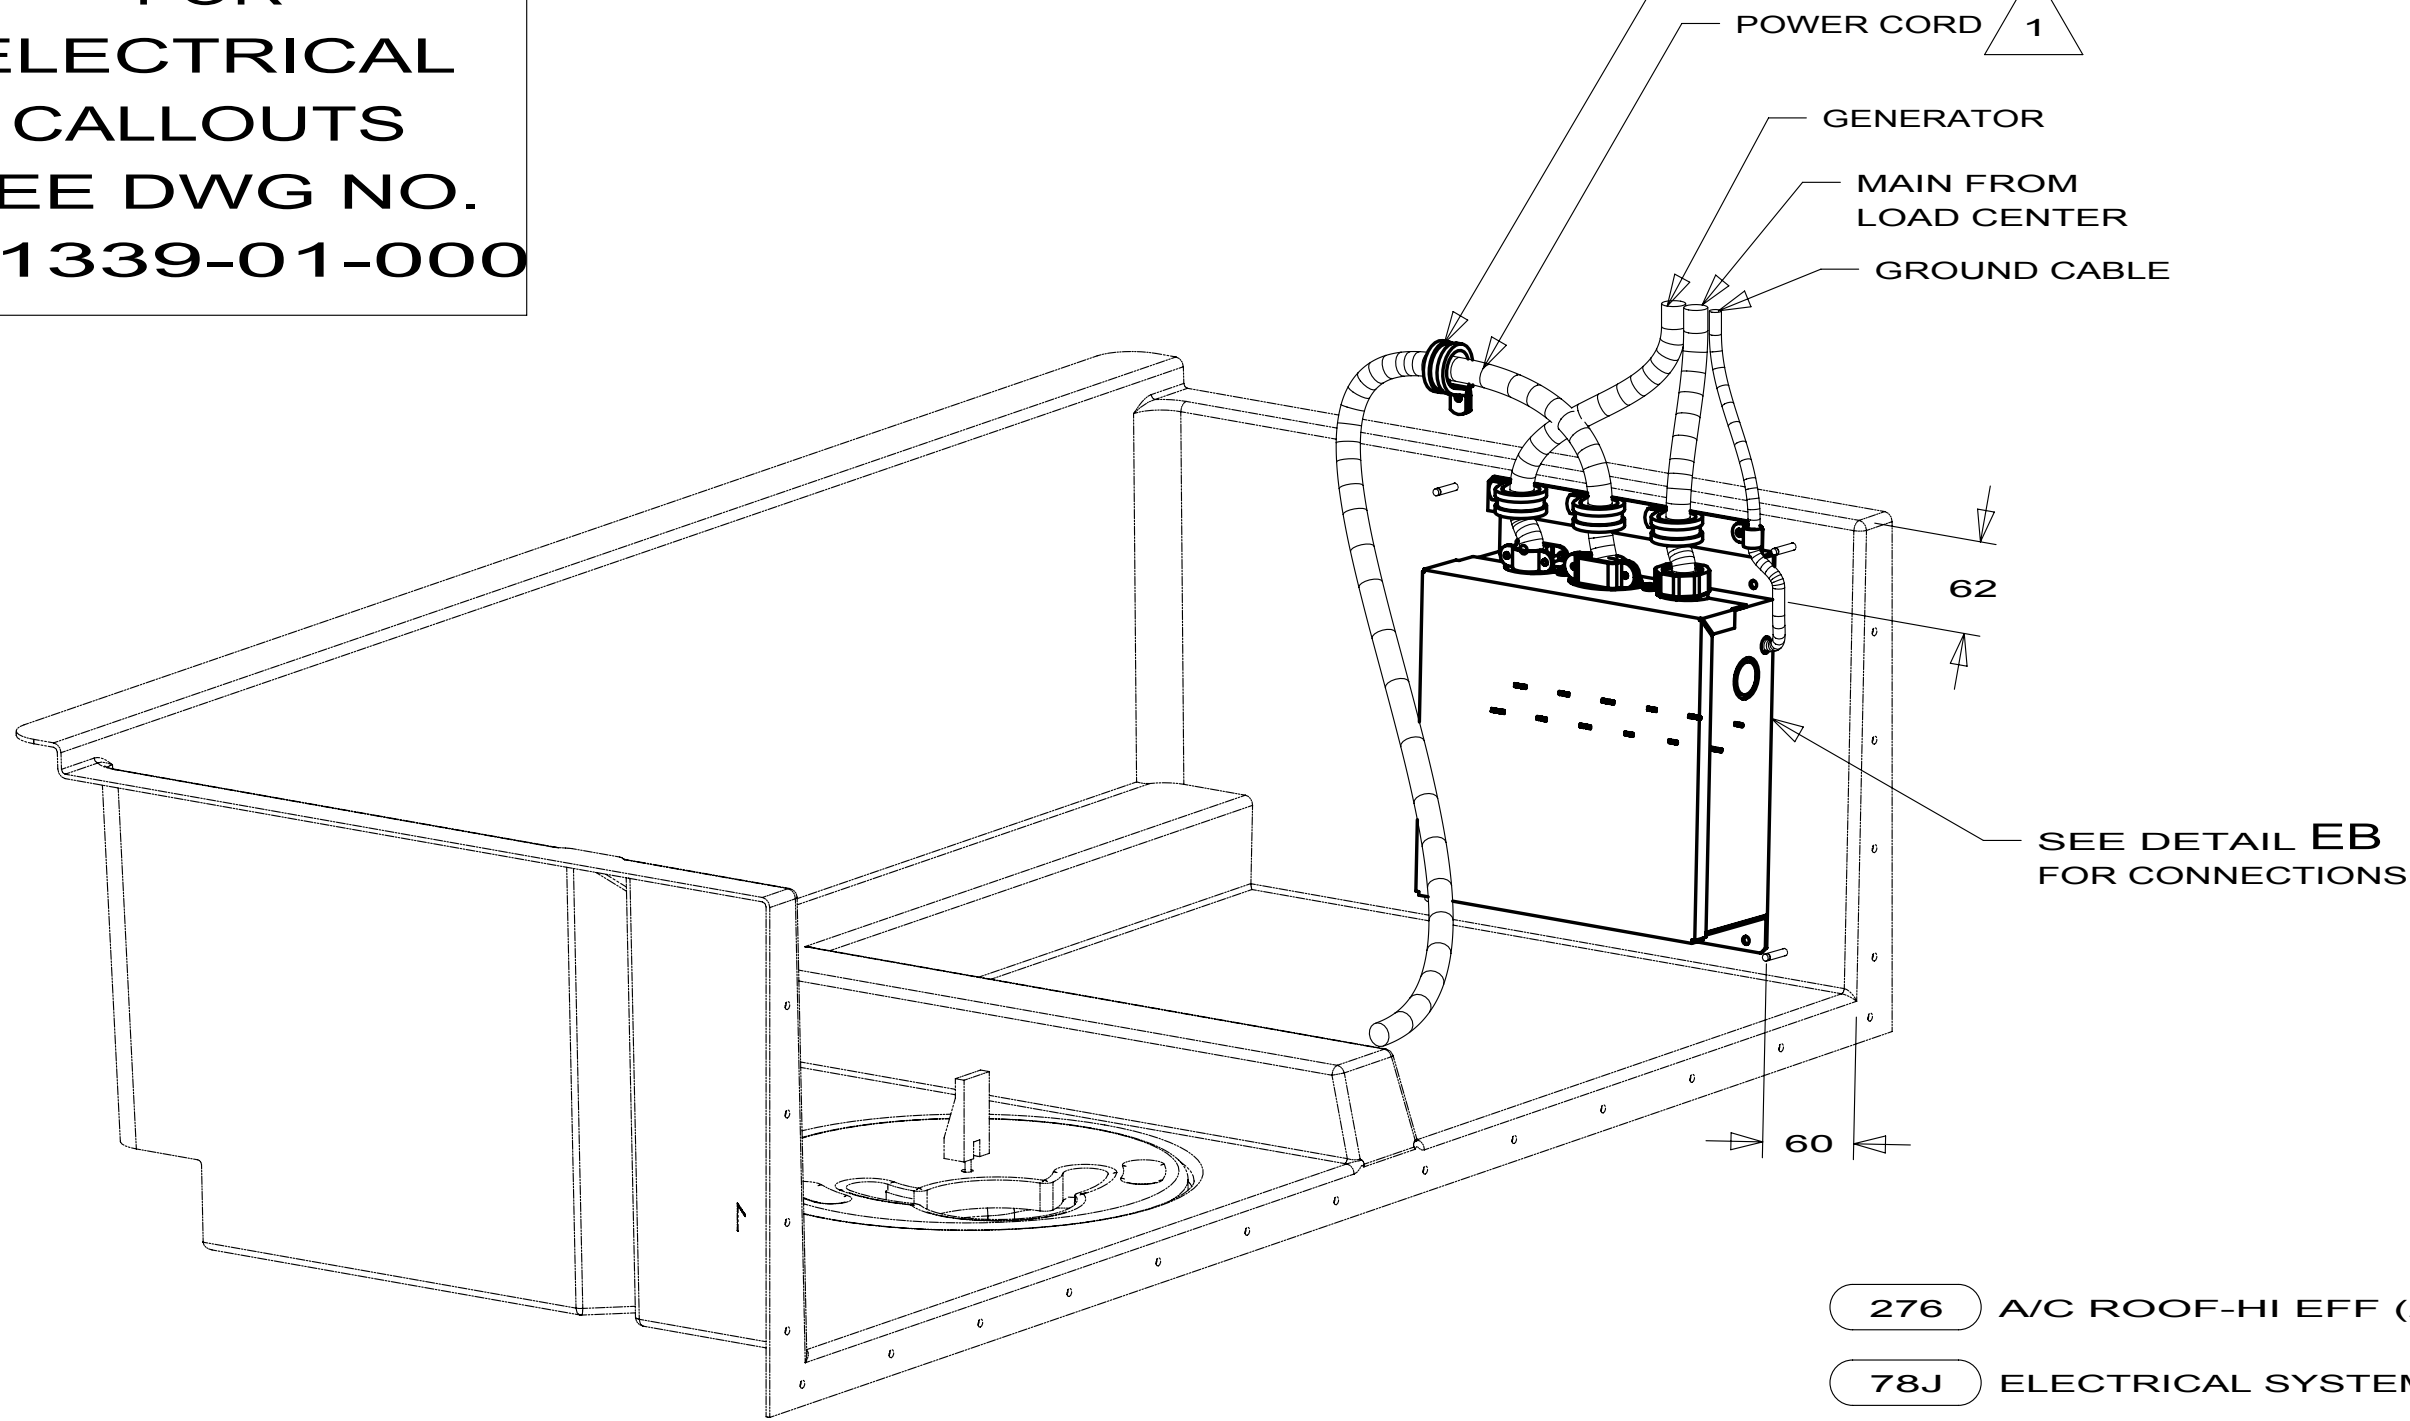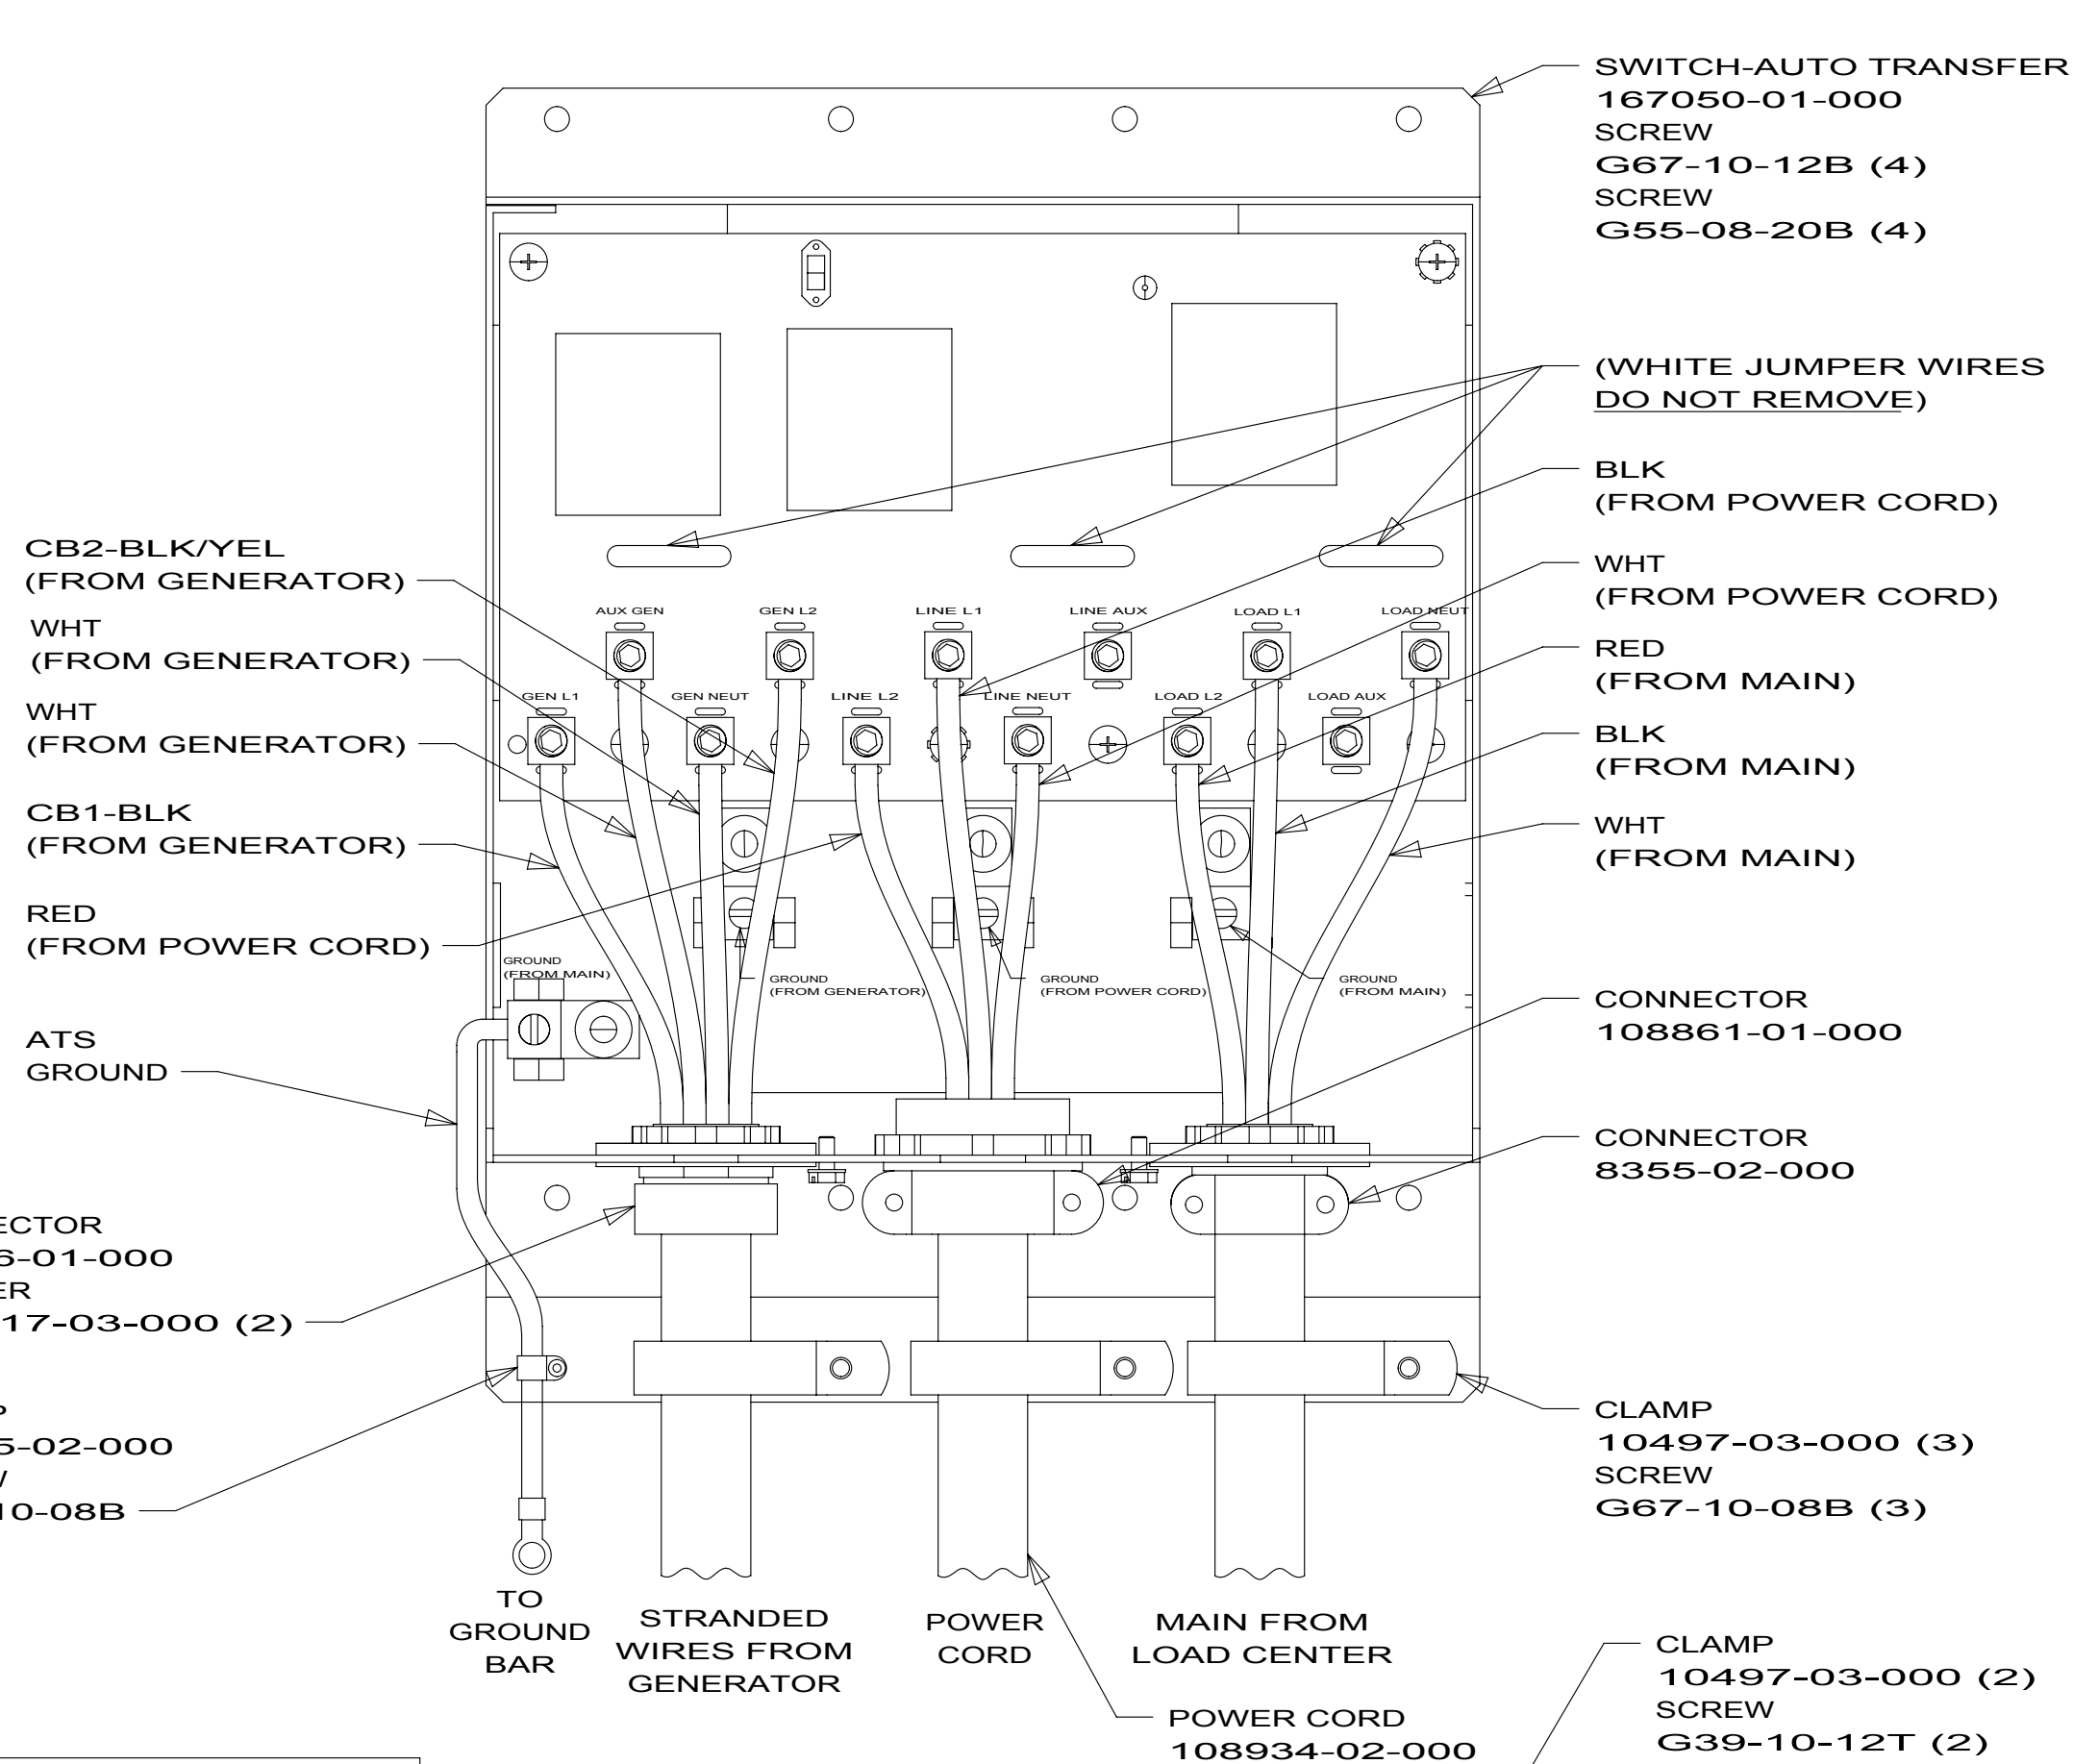

D35J,D37L,D33C


FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- 276 A/C ROOF-HI EFF (2) W/EMS
- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 78J 276



FIRST USED		
10 D-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
LOAD CENTER/ATS ASM		
SHEET 5	PART NO. 172034	REV

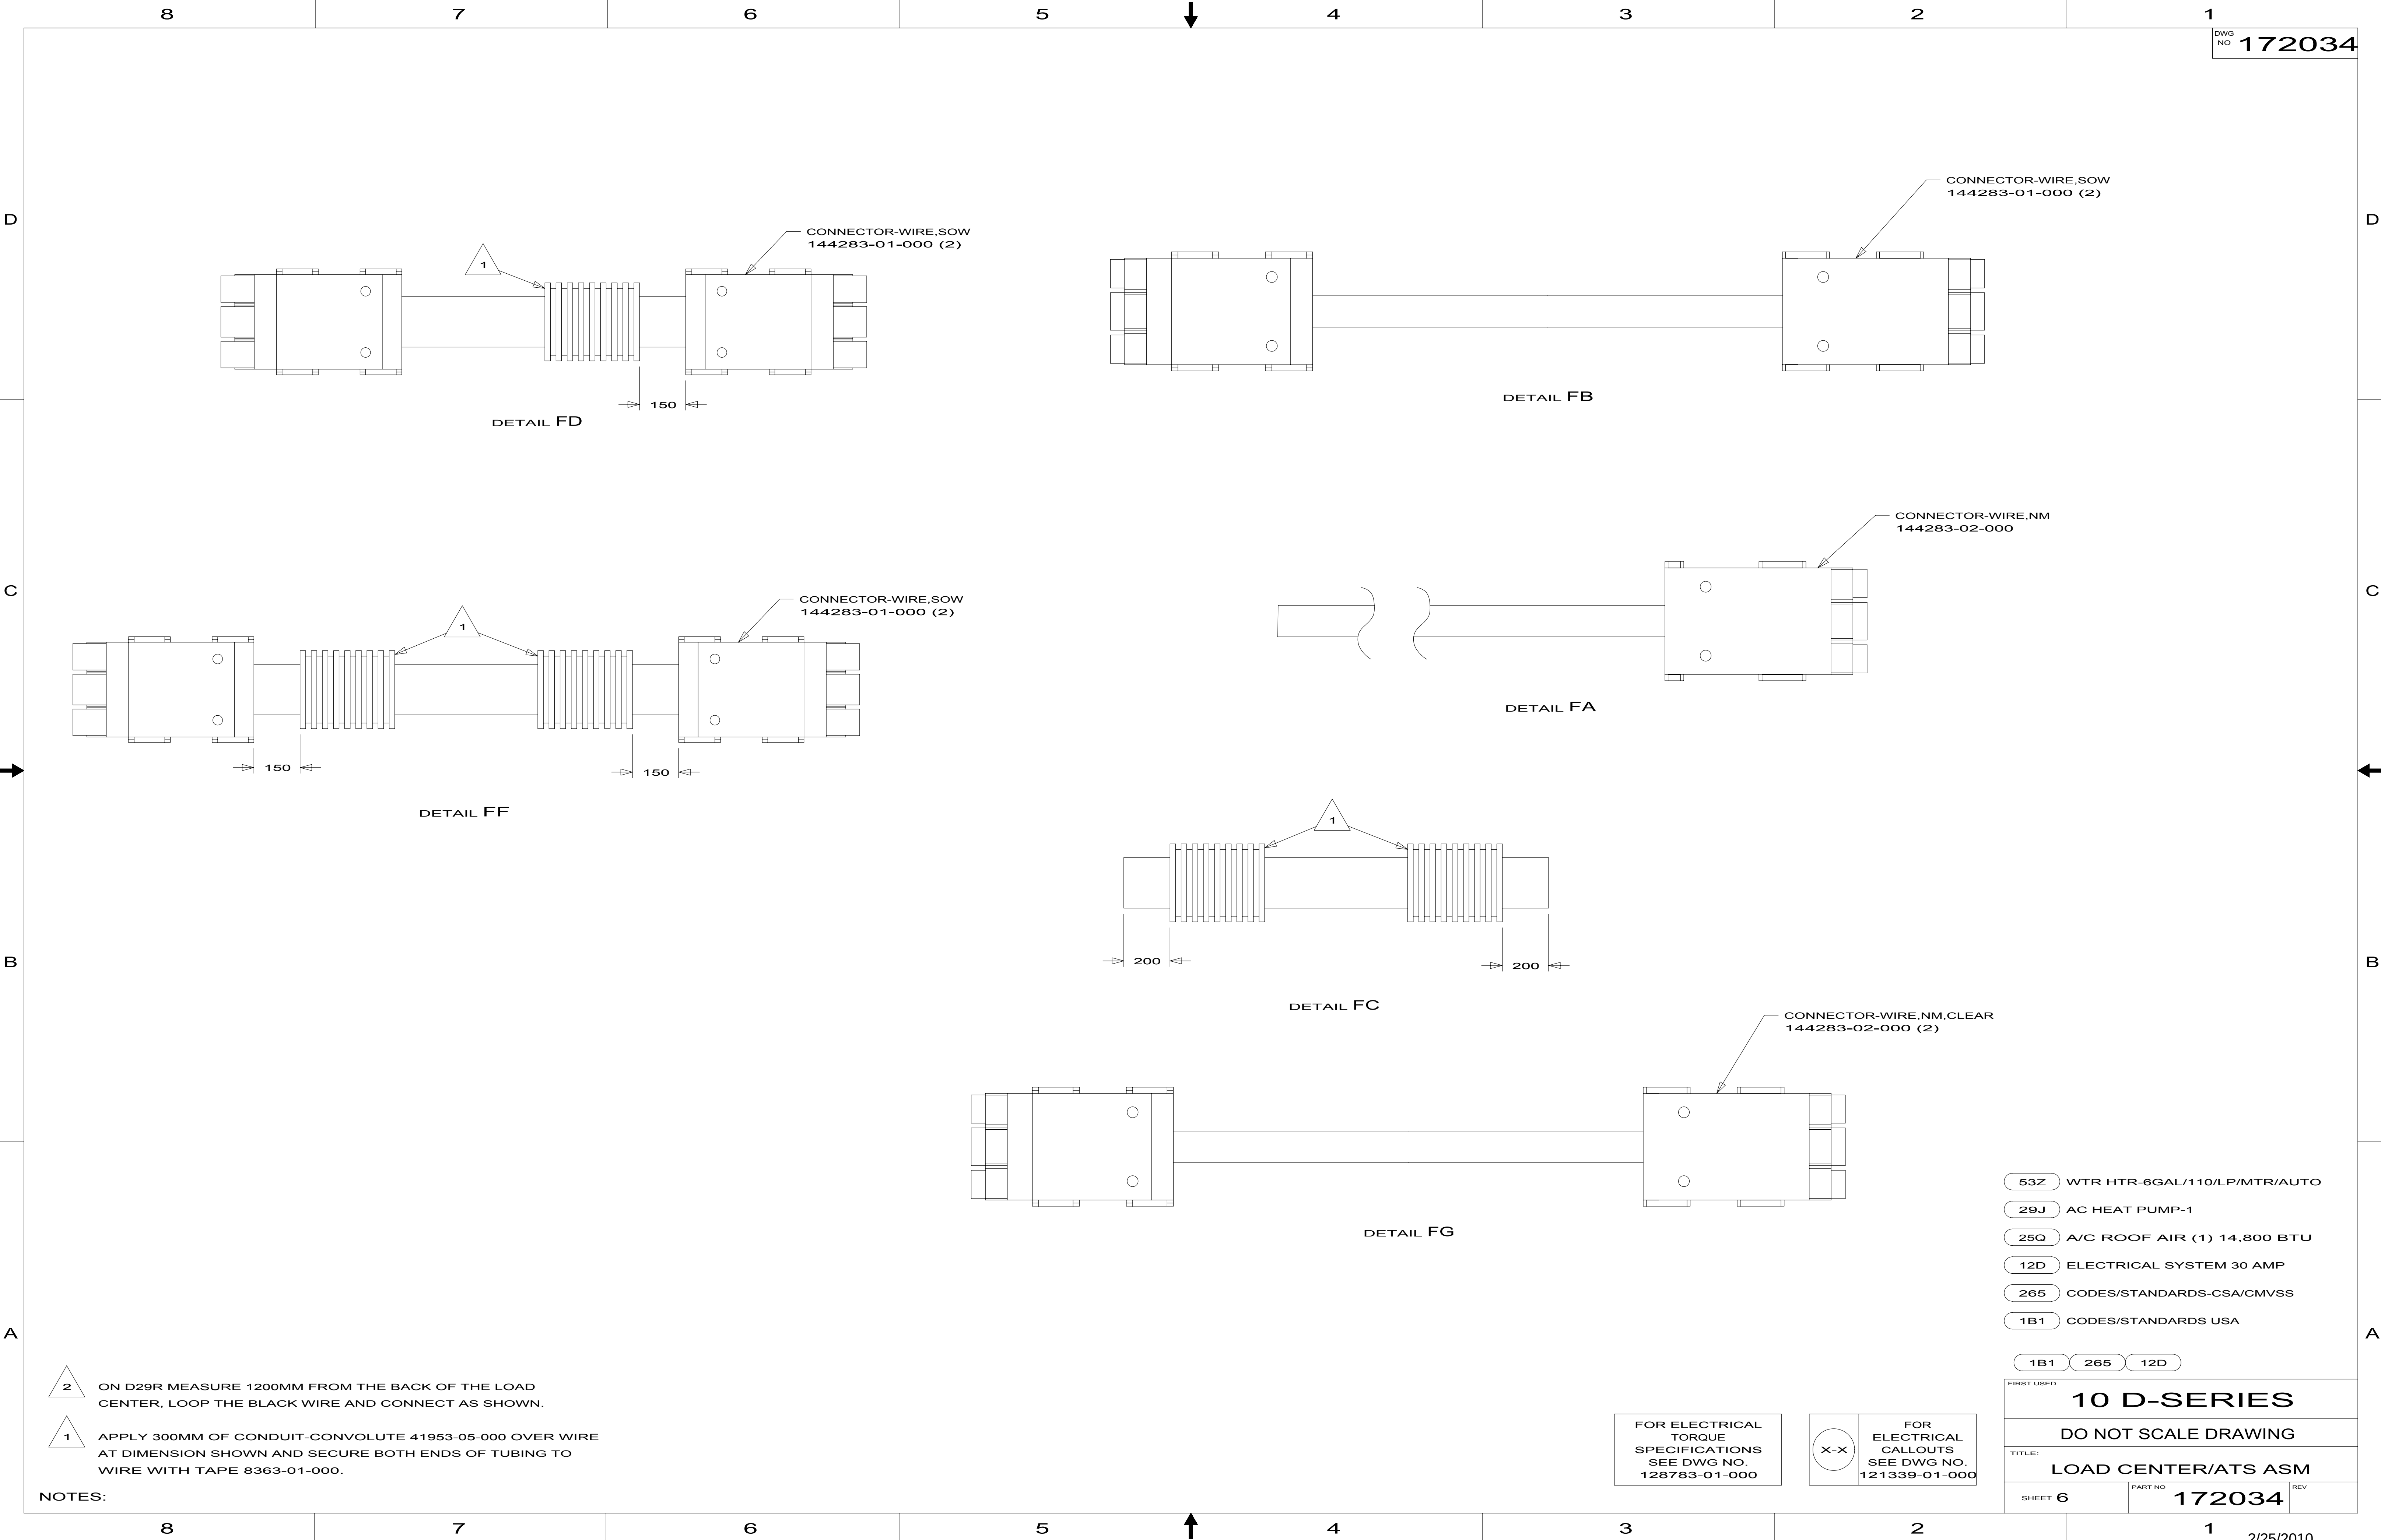

- 53Z WTR HTR-6GAL/110/LP/MTR/AUTO
- 29J AC HEAT PUMP-1
- 25Q A/C ROOF AIR (1) 14,800 BTU
- 12D ELECTRICAL SYSTEM 30 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 12D

FIRST USED		
10 D-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
LOAD CENTER/ATS ASM		
SHEET 6	PART NO 172034	REV

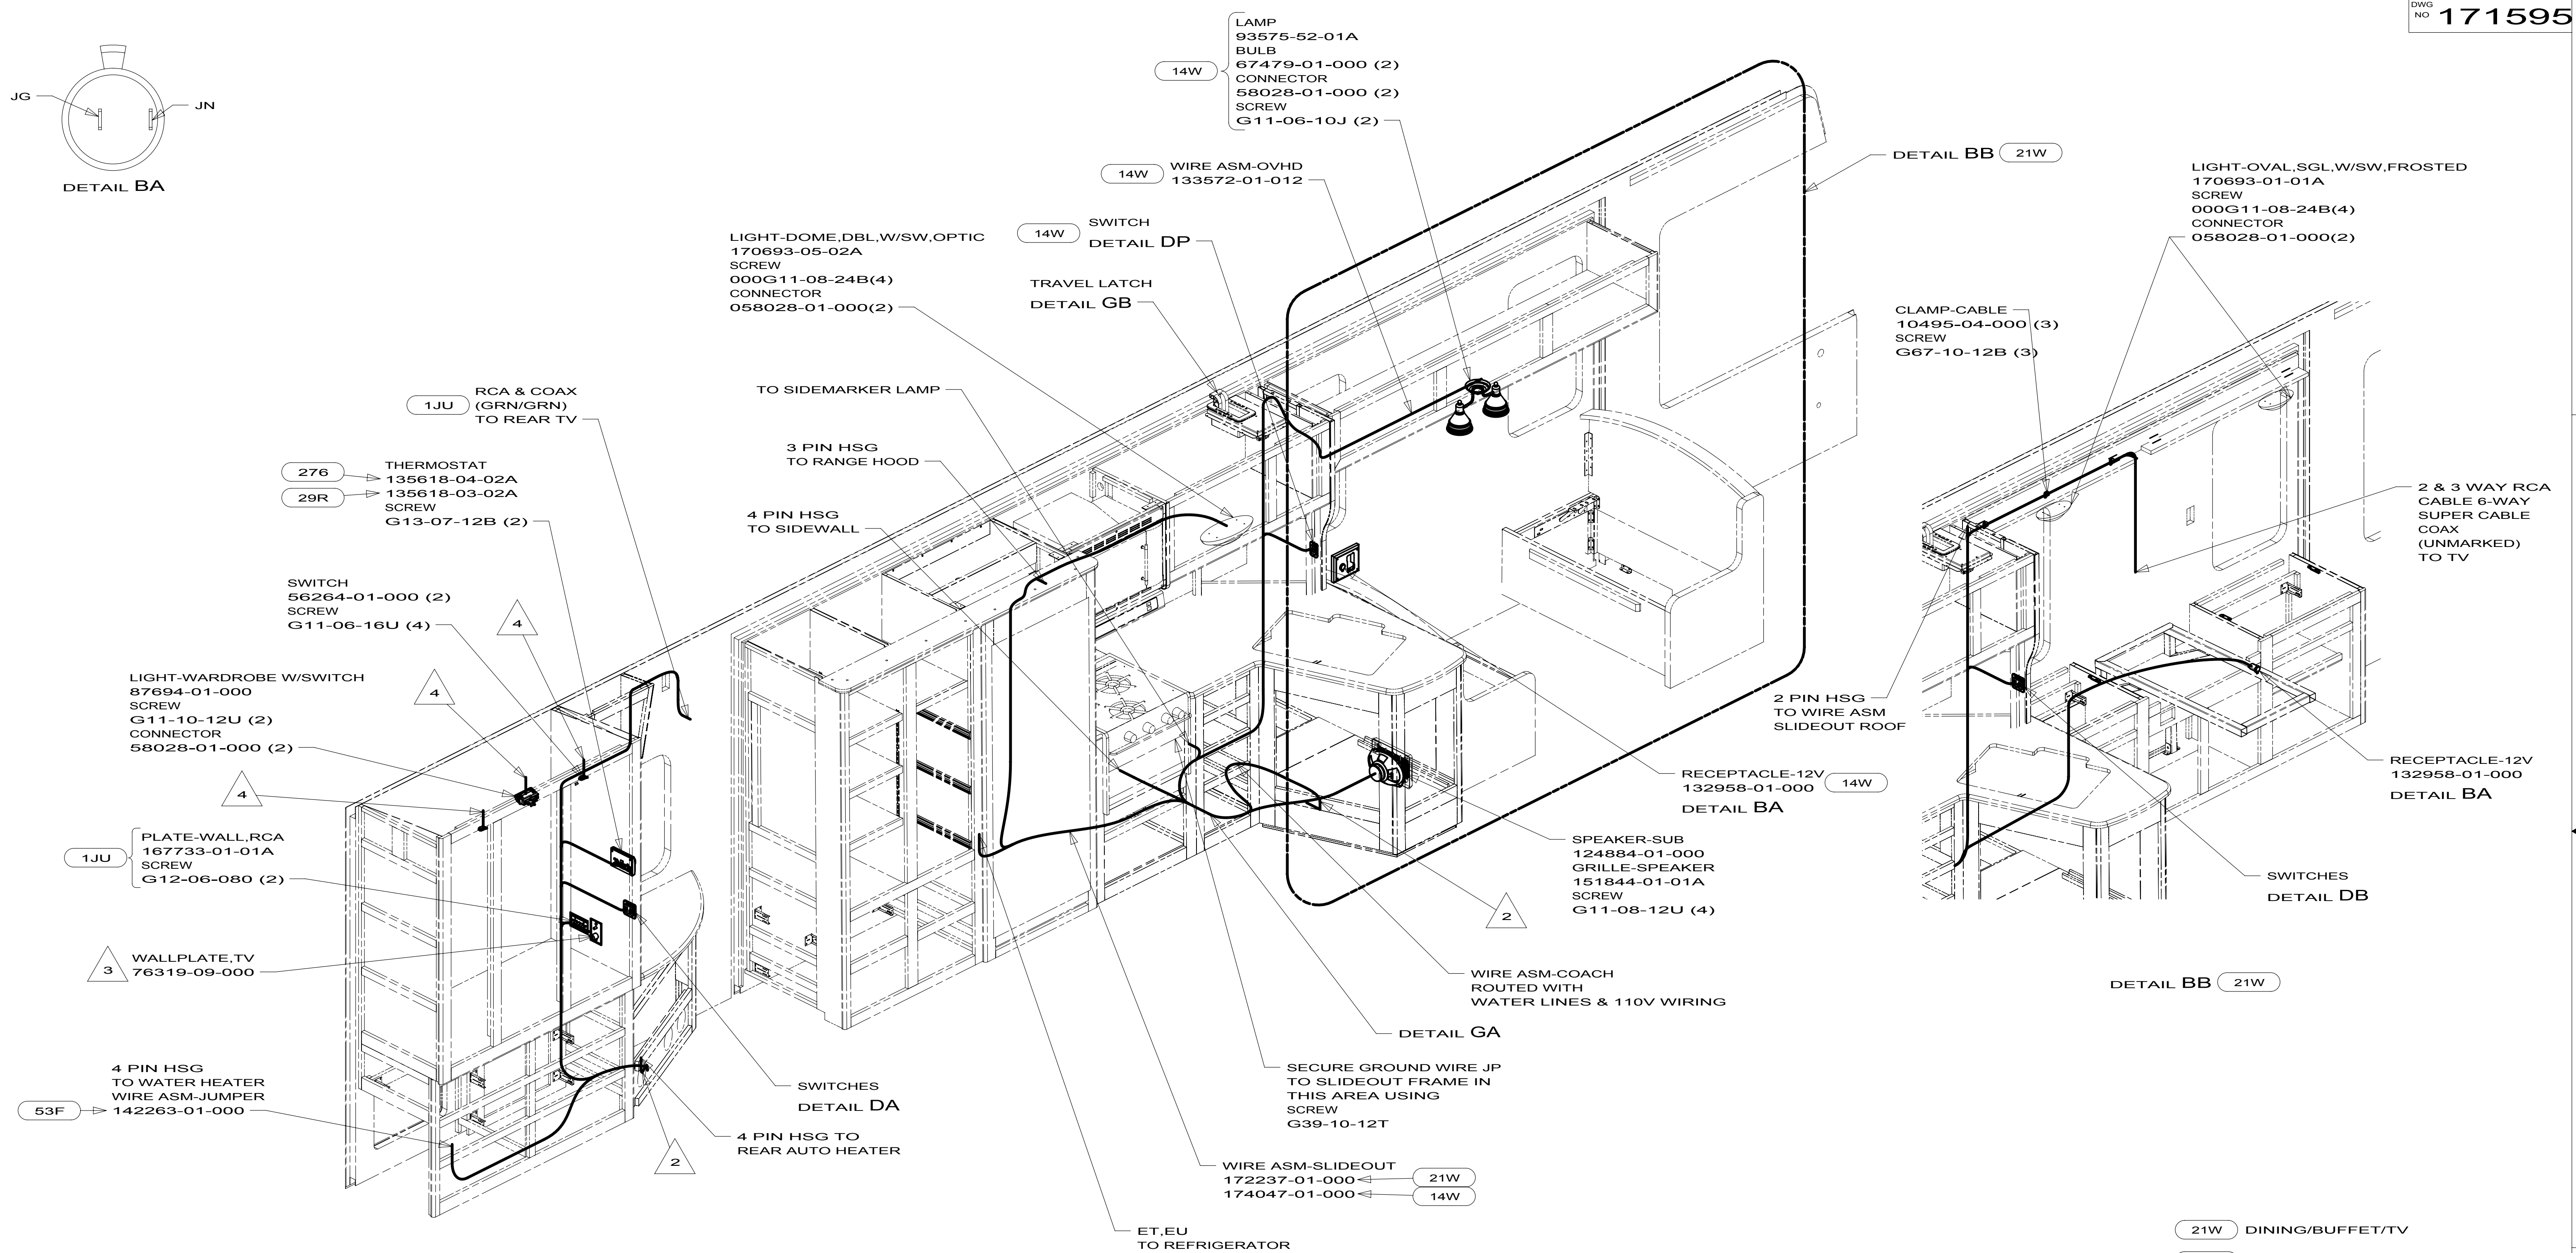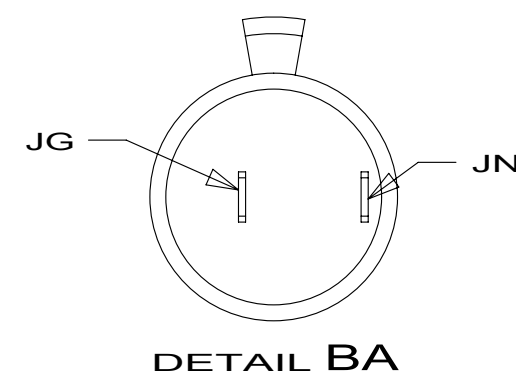

- | | |
|-----|------------------------------|
| 21W | DINING/BUFFET/TV |
| 14W | DINETTE |
| 1JU | TV (REAR)-19"COLOR, STEREO |
| 53F | WATER HEATER-ELEC. IGNITION |
| 29R | AC HEAT PUMP-2 HI EFFICIENCY |
| 276 | A/C ROOF-HI EFF (2) W/EMS |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |


1B1		265	
FIRST USED			
10 D33C			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-BODY,12V			
SHEET 2		PART NO	REV
		171595	

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

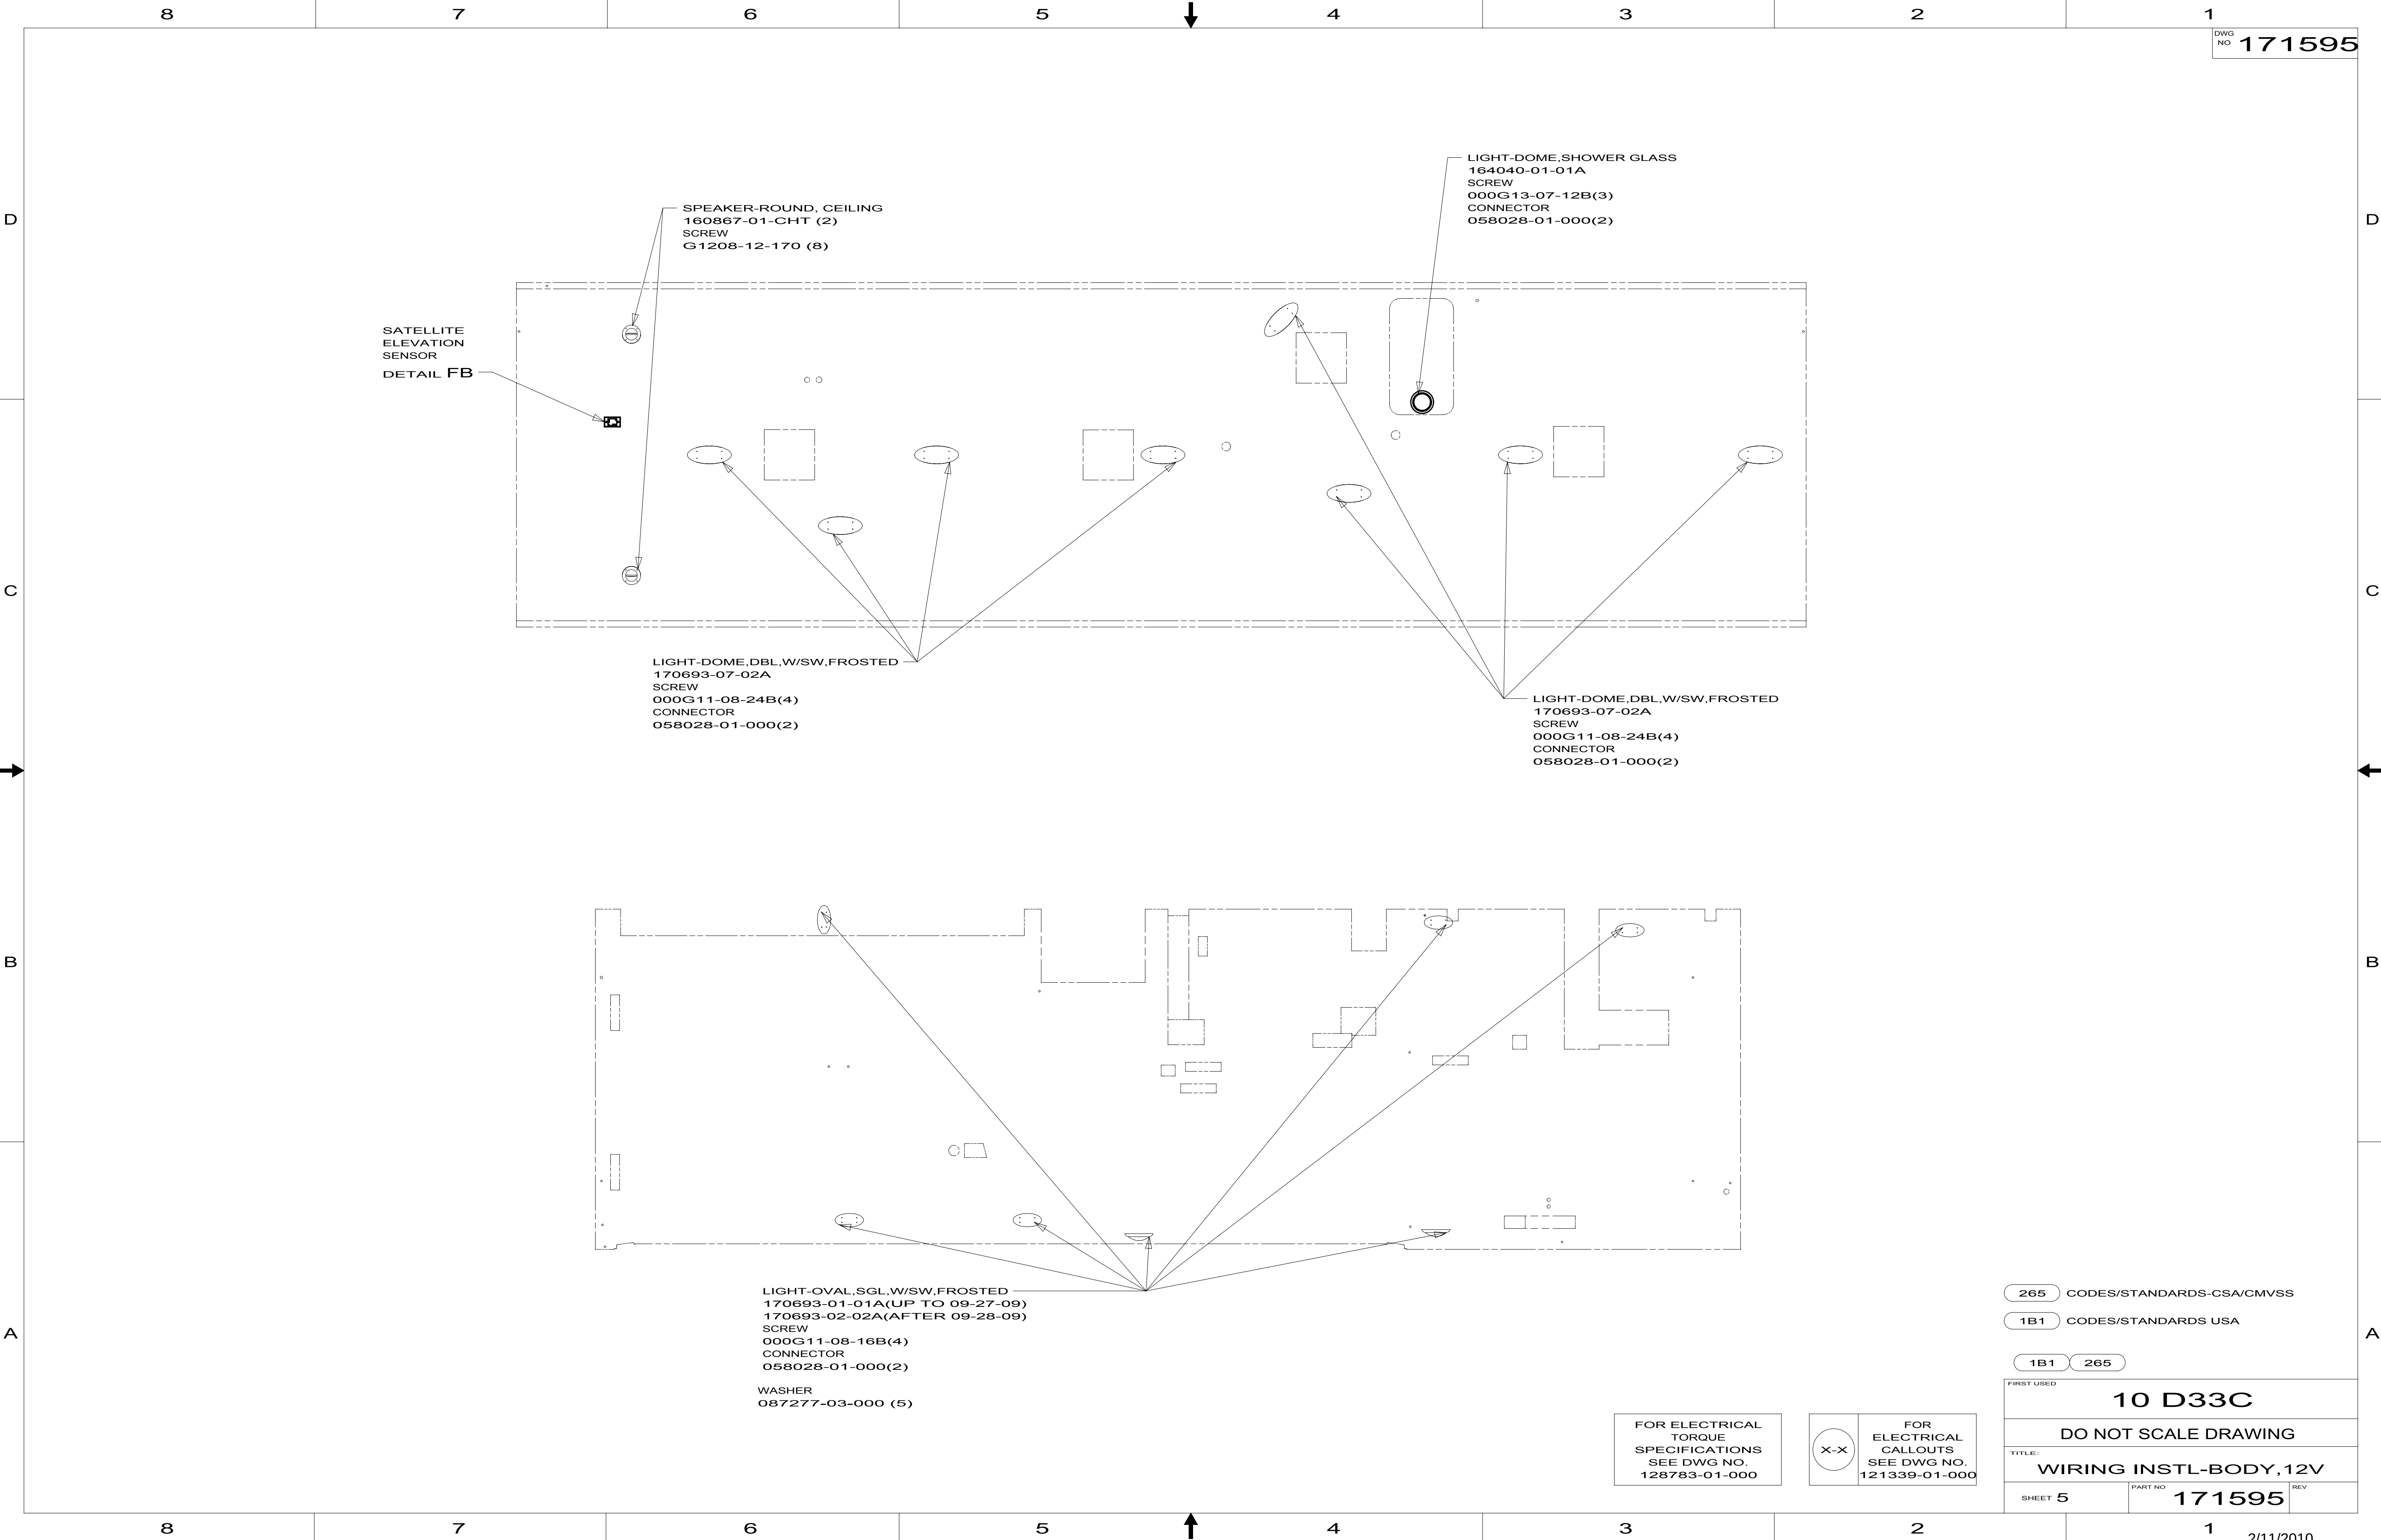

SATELLITE
ELEVATION
SENSOR
DETAIL FB

SPEAKER-ROUND, CEILING
160867-01-CHT (2)
SCREW
G1208-12-170 (8)

LIGHT-DOME,SHOWER GLASS
164040-01-01A
SCREW
000G13-07-12B(3)
CONNECTOR
058028-01-000(2)

LIGHT-DOME,DBL,W/SW,FROSTED
170693-07-02A
SCREW
000G11-08-24B(4)
CONNECTOR
058028-01-000(2)

LIGHT-DOME,DBL,W/SW,FROSTED
170693-07-02A
SCREW
000G11-08-24B(4)
CONNECTOR
058028-01-000(2)

LIGHT-OVAL,SGL,W/SW,FROSTED
170693-01-01A(UP TO 09-27-09)
170693-02-02A(AFTER 09-28-09)
SCREW
000G11-08-16B(4)
CONNECTOR
058028-01-000(2)

WASHER
087277-03-000 (5)

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 D33C		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 5	PART NO 171595	REV

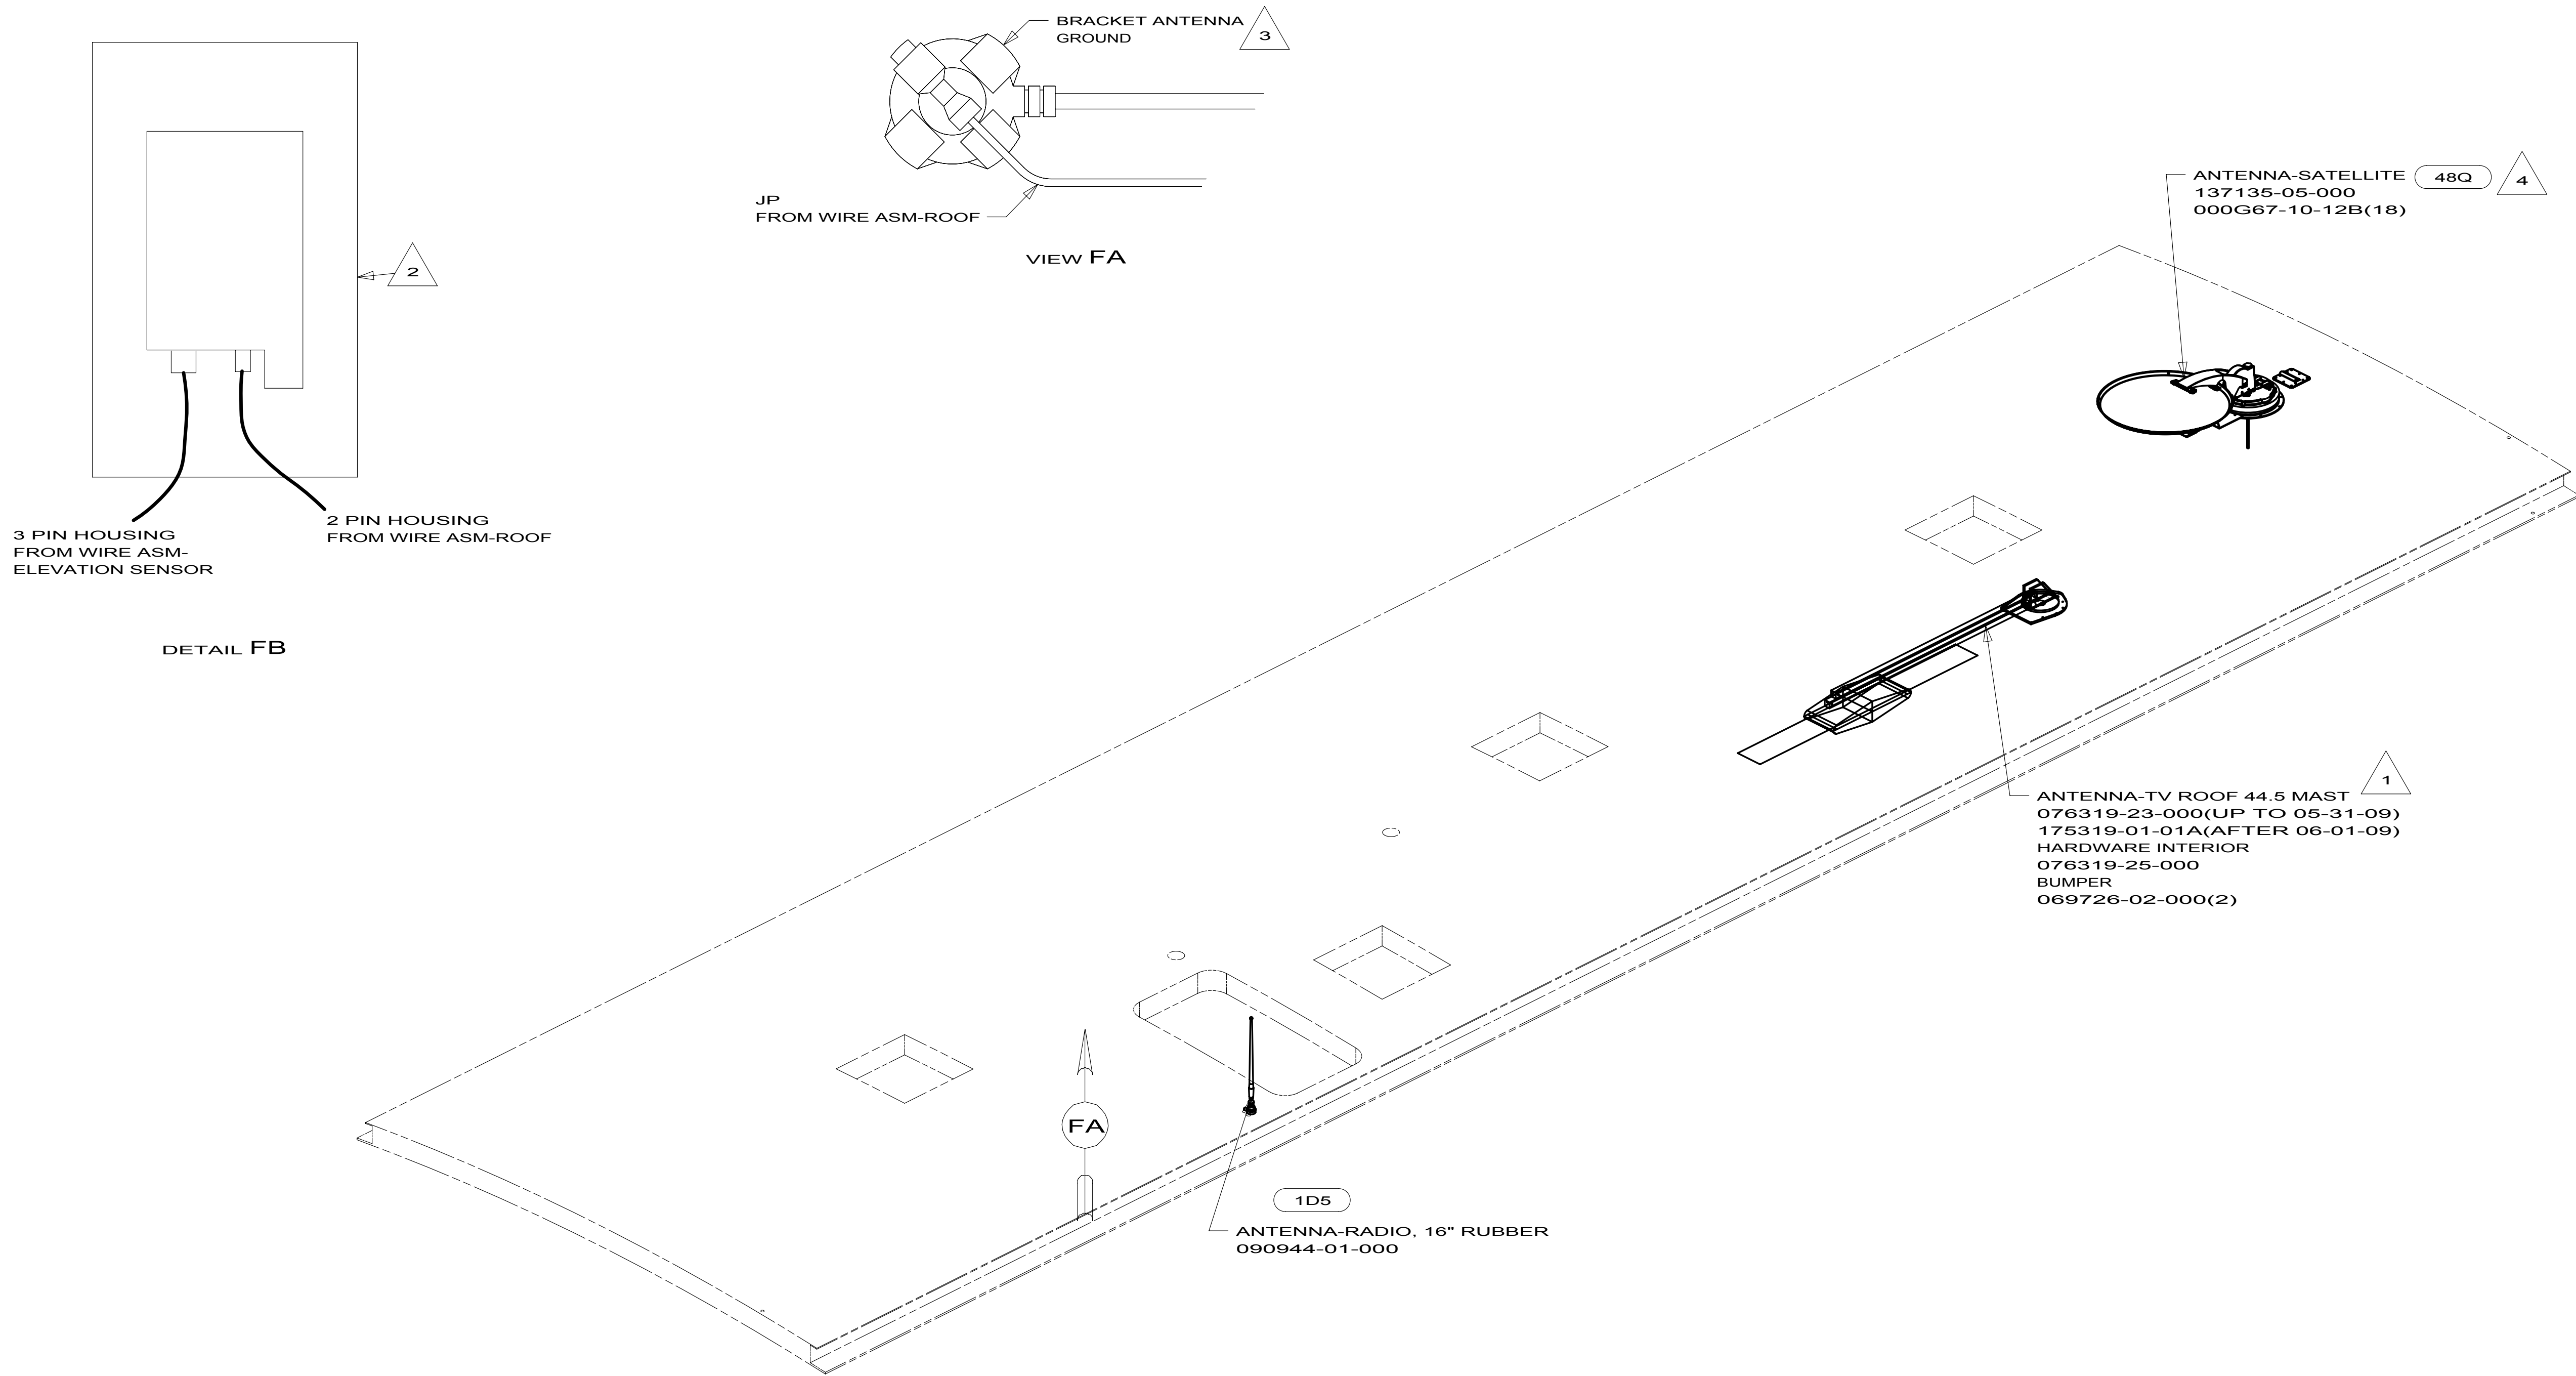

- 4 CONNECT THE ORANGE COAX FROM ROOF ASM TO ONE OF THE 2 GRAY COAX CABLES ON THE SATELLITE DISH, THE OTHER GRAY COAX IS NOT USED.
- 3 WRAP LEGS AROUND ANTENNA BASE.
- 2 SENSOR SUPPLIED WITH SATELLITE ASSEMBLY.
- 1 SEE DWG 76319-01-000 FOR INSTALLATION INSTRUCTIONS.


NOTES:


- 48Q SATELLITE DISH & ELEV.SENSOR
- 1D5 ENTERTAINMENT CENTR/EXT W/CD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D33C		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 6	PART NO 171595	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

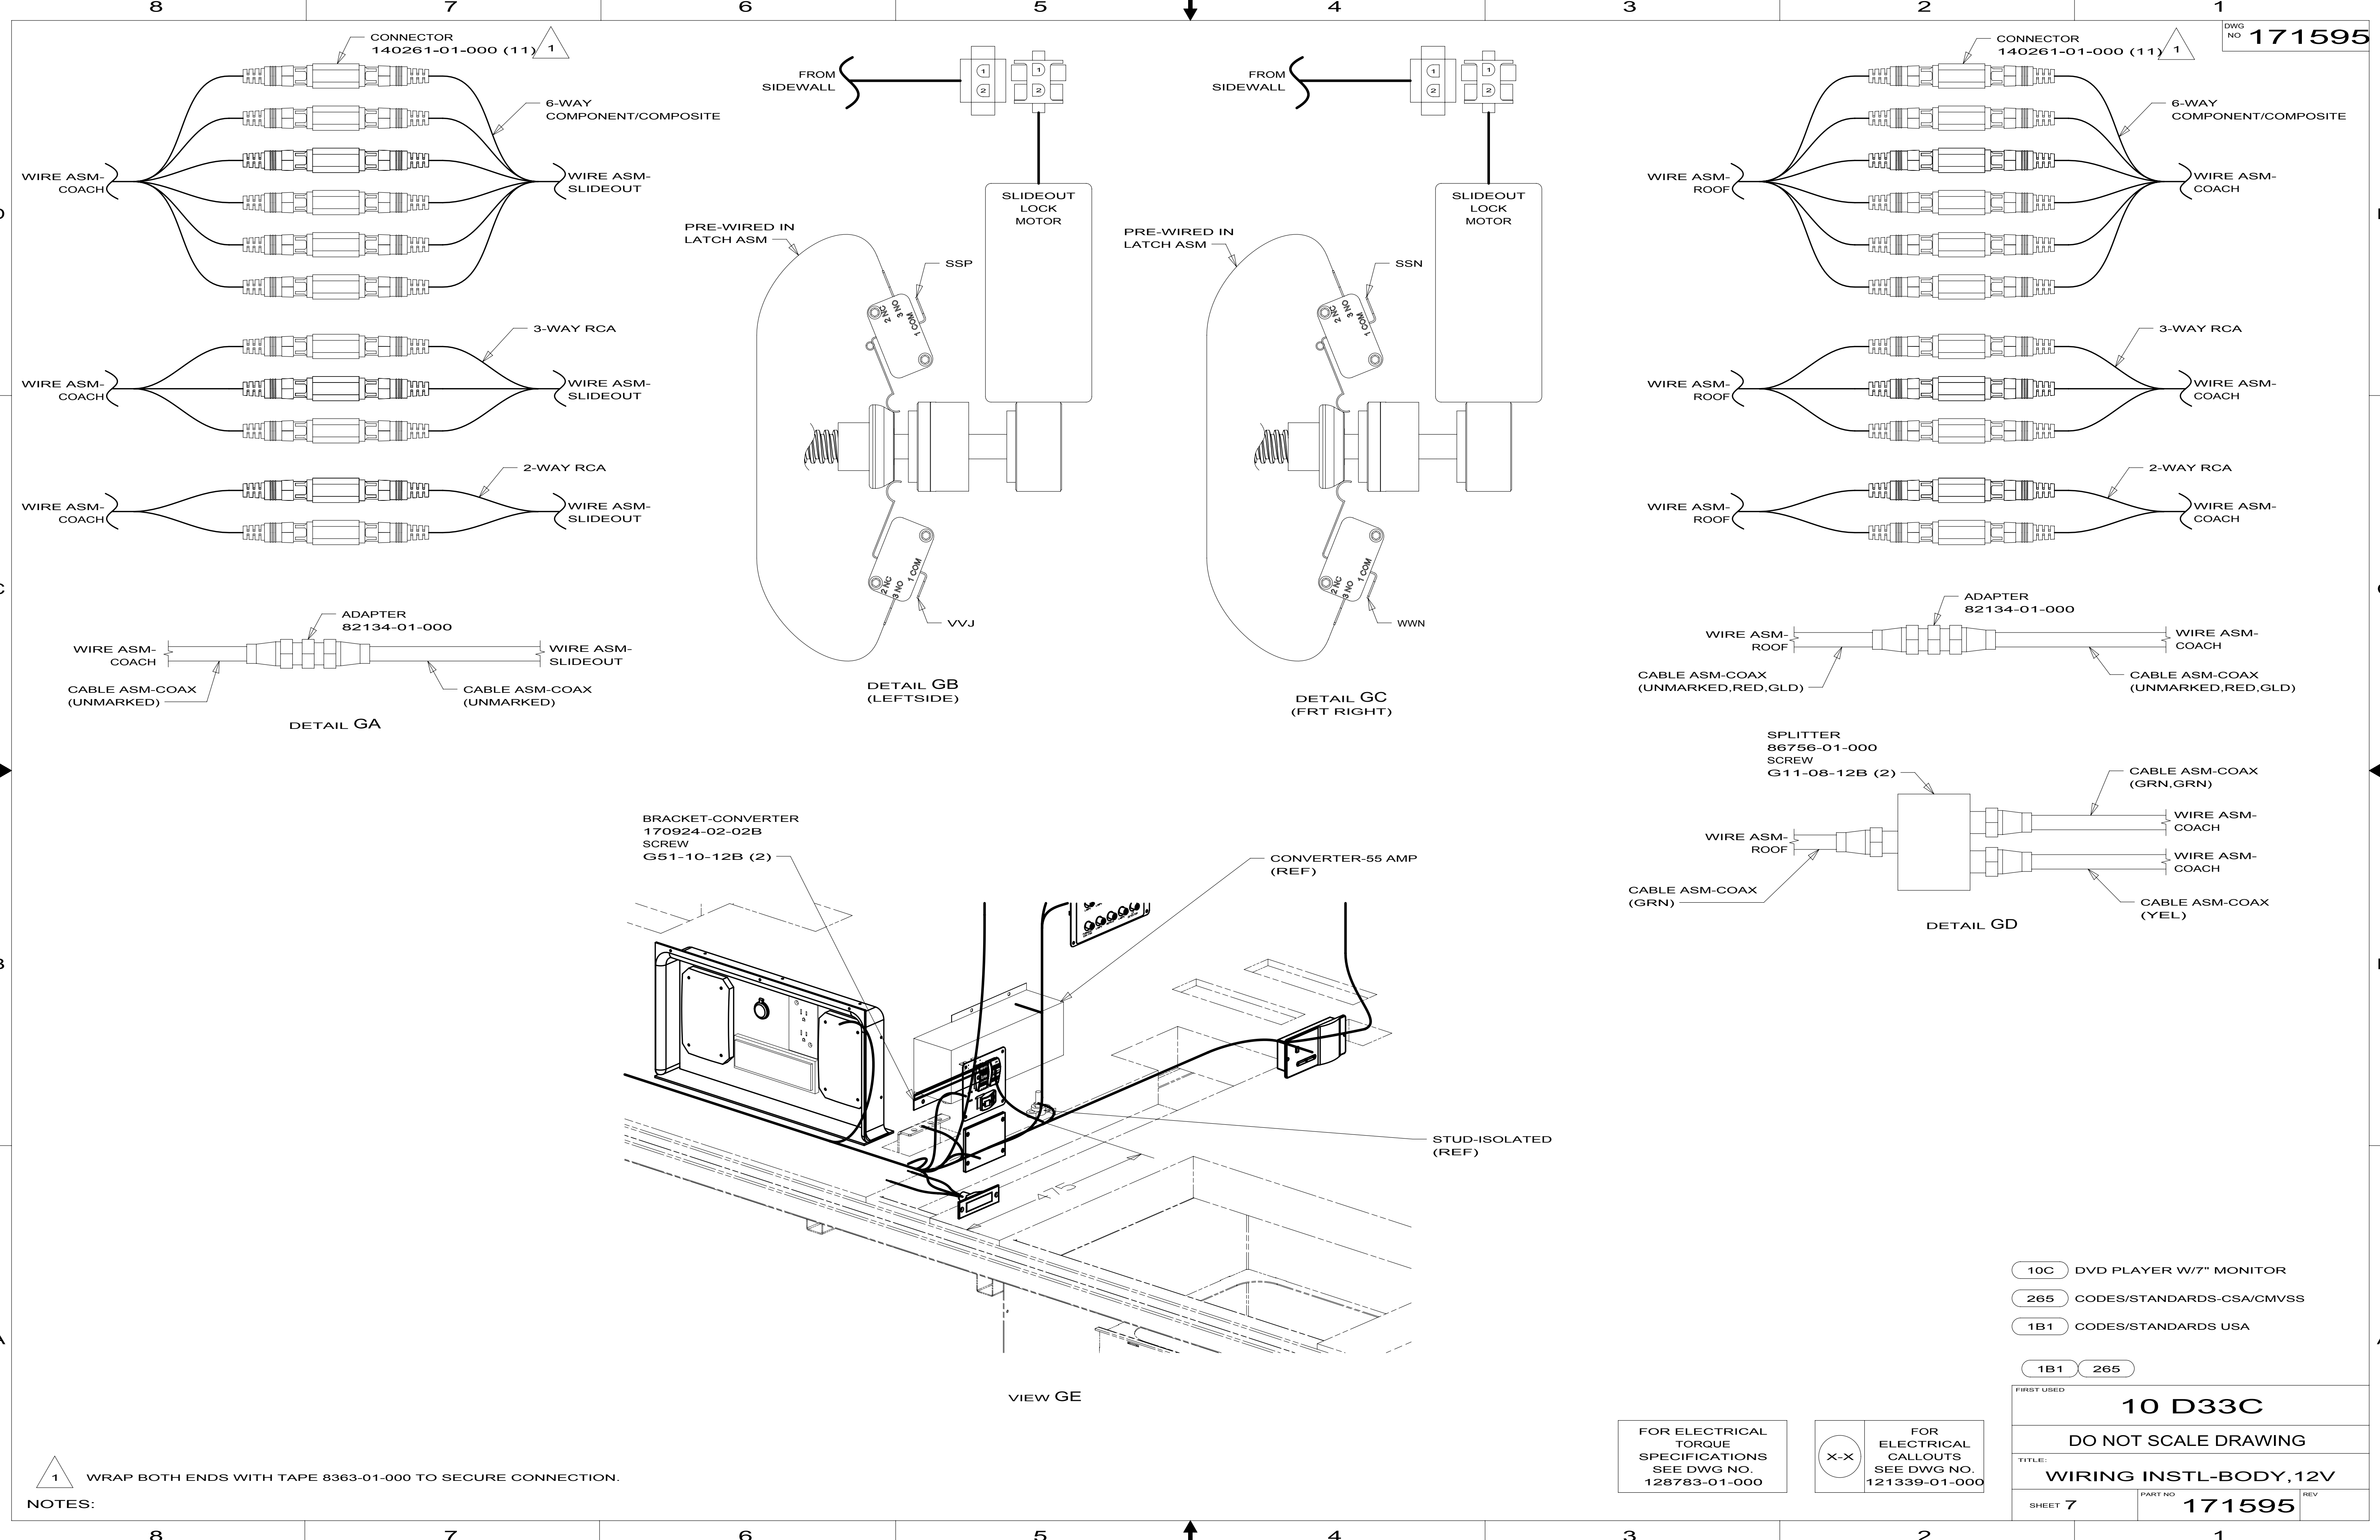

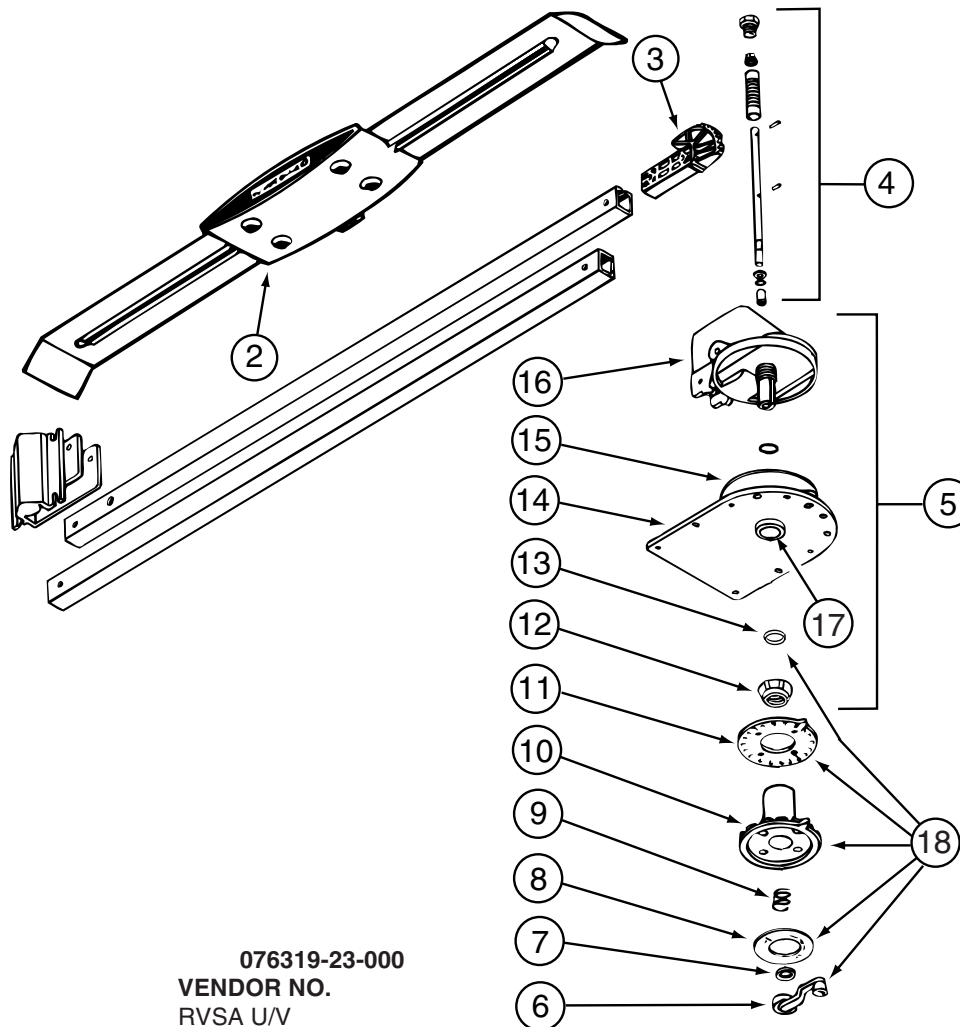


KEY PART NUMBER

2	076319-01-700	EA	HEAD-ANTENNA, AMPLIFIED
3	076319-01-701	EA	GEAR-ELEVATING, PLASTIC
4	076319-01-702	EA	SHAFT ASM-ELEVATING
5	076319-01-711	EA	BASE & LIFT ASM
7	076319-01-705	EA	GROMMET-NYLON, 7/8"ID
8	076319-01-708	EA	DECAL-CRANK
9	076319-01-707	EA	SPRING-HANDLE
11	076319-01-712	EA	PLATE - CEILING
12	076319-01-715	EA	NUT (GEAR HOUSING)
14	076319-01-713	EA	PLATE-BASE, STEEL
15	076319-01-703	EA	BEARING-NYLON, 5"OD
16	076319-01-714	EA	HOUSING, ROTATING GEAR
17	076319-01-704	EA	BEARING-NYLON, 1.25"OD
18	076319-01-709	EA	HANDLE-HEAD DIRECTIONAL
	076319-01-716	EA	TUBING, ELEVATING

076319-23-000
VENDOR NO.

RVSA U/V
2200046
RP-4000
2762802
3200658
5413002
2160822
3200608
2200047
3100523
3200656
2200049
3200657
200644
RP-2900

CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)

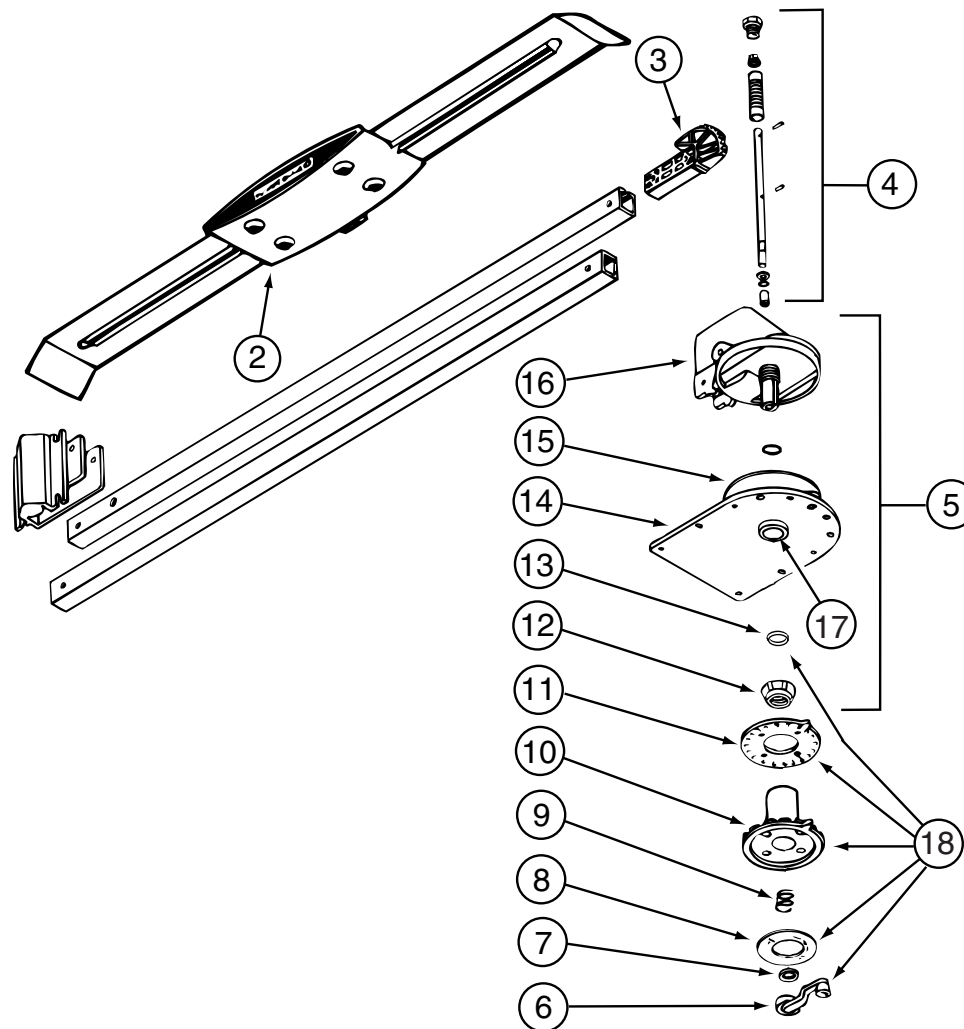

076319-25-000

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
6	076319-01-706	EA	CRANK-W/SET SCREW UNIV/BEIGE	2750897
6	120233-01-710	EA	HANDLE-CRANK W/SCREW - WHITE	RP-6795
8	076319-01-708	EA	DECAL-CRANK	5413002
10	076319-25-700	EA	DIRECTIONAL HANDLE(WHITE)	3200612
11	076319-25-701	EA	PLATE - CEILING(WHITE)	3200609
13	120233-01-709	EA	WASHER-NYLON	RP-2658
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

KEY	PART NUMBER	U/M	DESCRIPTION
	087694-01-700	EA	BULB

087694-01-000
VENDOR NO.
GE561

KEY	PART NUMBER	U/M DESCRIPTION
	093575-46-700	EA GLOBE
	093575-46-701	EA NUT-PLAS. LOCKING


093575-46-01A
VENDOR NO.
 98
 39155

KEY	PART NUMBER	U/M DESCRIPTION
	093575-47-700	EA GLOBE - GLASS

093575-47-01A
VENDOR NO.
 114-GLASS

KEY	PART NUMBER	U/M DESCRIPTION
	093575-52-700	EA SHADE-FABRIC

093575-52-01A
VENDOR NO.
 H3015

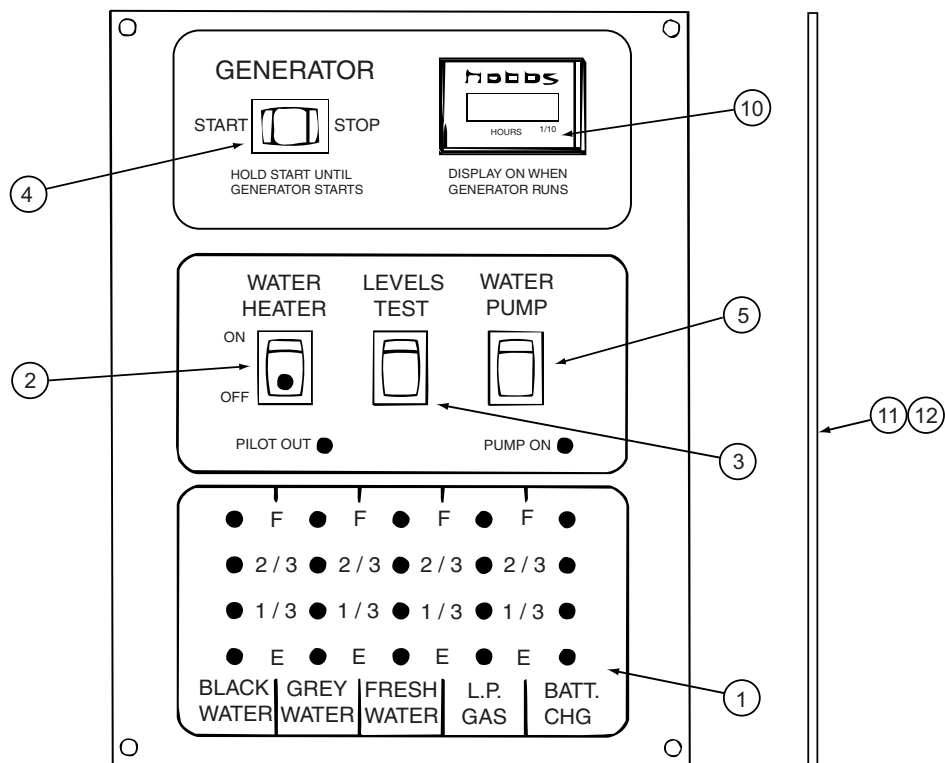


134940-06-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-702	EA	SWITCH - MOM/OFF/MOM/3 TERM	L0112-00
5	096983-01-703	EA	SWITCH - ON/ON	L0115-00
10	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)	L0775-00
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

134940-07-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-703	EA	SWITCH - ON/ON	L0115-00
5	134940-02-700	EA	SWITCH - DUMMY	L0118
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

134940-08-01A				
KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-04-700	EA	CHASSIS - SILKSCREENED	CE0136-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-702	EA	SWITCH - MOM/OFF/MOM/3 TERM	L0112-00
5	096983-01-703	EA	SWITCH - ON/ON	L0115-00
10	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)	L0775-00
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
12	134940-04-701	EA	BOARD - PC - SOLAR LIGHT	L5121-01
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

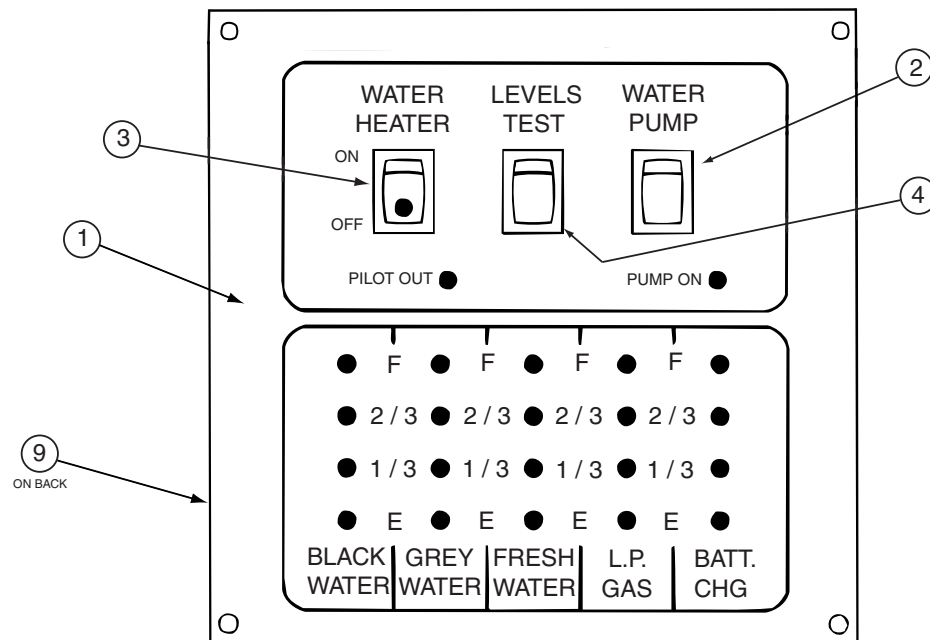


134940-10-01A				
KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-10-700	EA	SILKSCREENED CHASSIS	CE0129-00
2	096983-01-703	EA	SWITCH - ON/ON	L0115-00
3	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
4	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
9	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

137135-05-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	120233-01-714	EA CLIP-E	5160818
	120233-01-737	EA PLATE/INT-W/DIRECTIONAL HDLE	RK-CEIL
	120233-01-738	EA HDW PKG-HANDLE/SPRING/WASHER	RK-HAND
	120233-04-703	EA KIT-DIRECTIONAL HDL UPGRADE	RP-RM46
	137135-01-703	EA KIT ELEV-SHAFT/PLUG/SPRING	RP-4400
	137135-01-704	EA PIN - 1/4" X 3.25"	2160813
	137135-01-708	EA TURRET	3100728
	137135-01-710	EA PLATE - ROTATE LIMIT	3720052
	137135-01-712	EA BEARING - OUTER	2590347
	137135-01-713	EA TURRET BASE	3100730
	137135-01-714	EA GEAR - ELEVATING SHAFT	2200465
	137135-01-715	EA BEARING - INNER	2590348
	137135-01-717	EA BOLT - FLAT HEAD	2160362
	137135-01-719	EA BRACKET - PIVOT	2744945
	137135-01-722	EA CLAMP	2590343
	137135-02-700	EA DE-SENSOR	2780096

KEY	PART NUMBER	U/M	DESCRIPTION	163097-01-000	VENDOR NO.
	163097-01-700	EA	KEY - #2382 (ILLINOIS LOCK)		2382
	163097-01-701	EA	KEY - #2341 (MILLER DIAL)		PART SALES

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	172120-01-700	EA	REMOTE - RADIO	REMJC

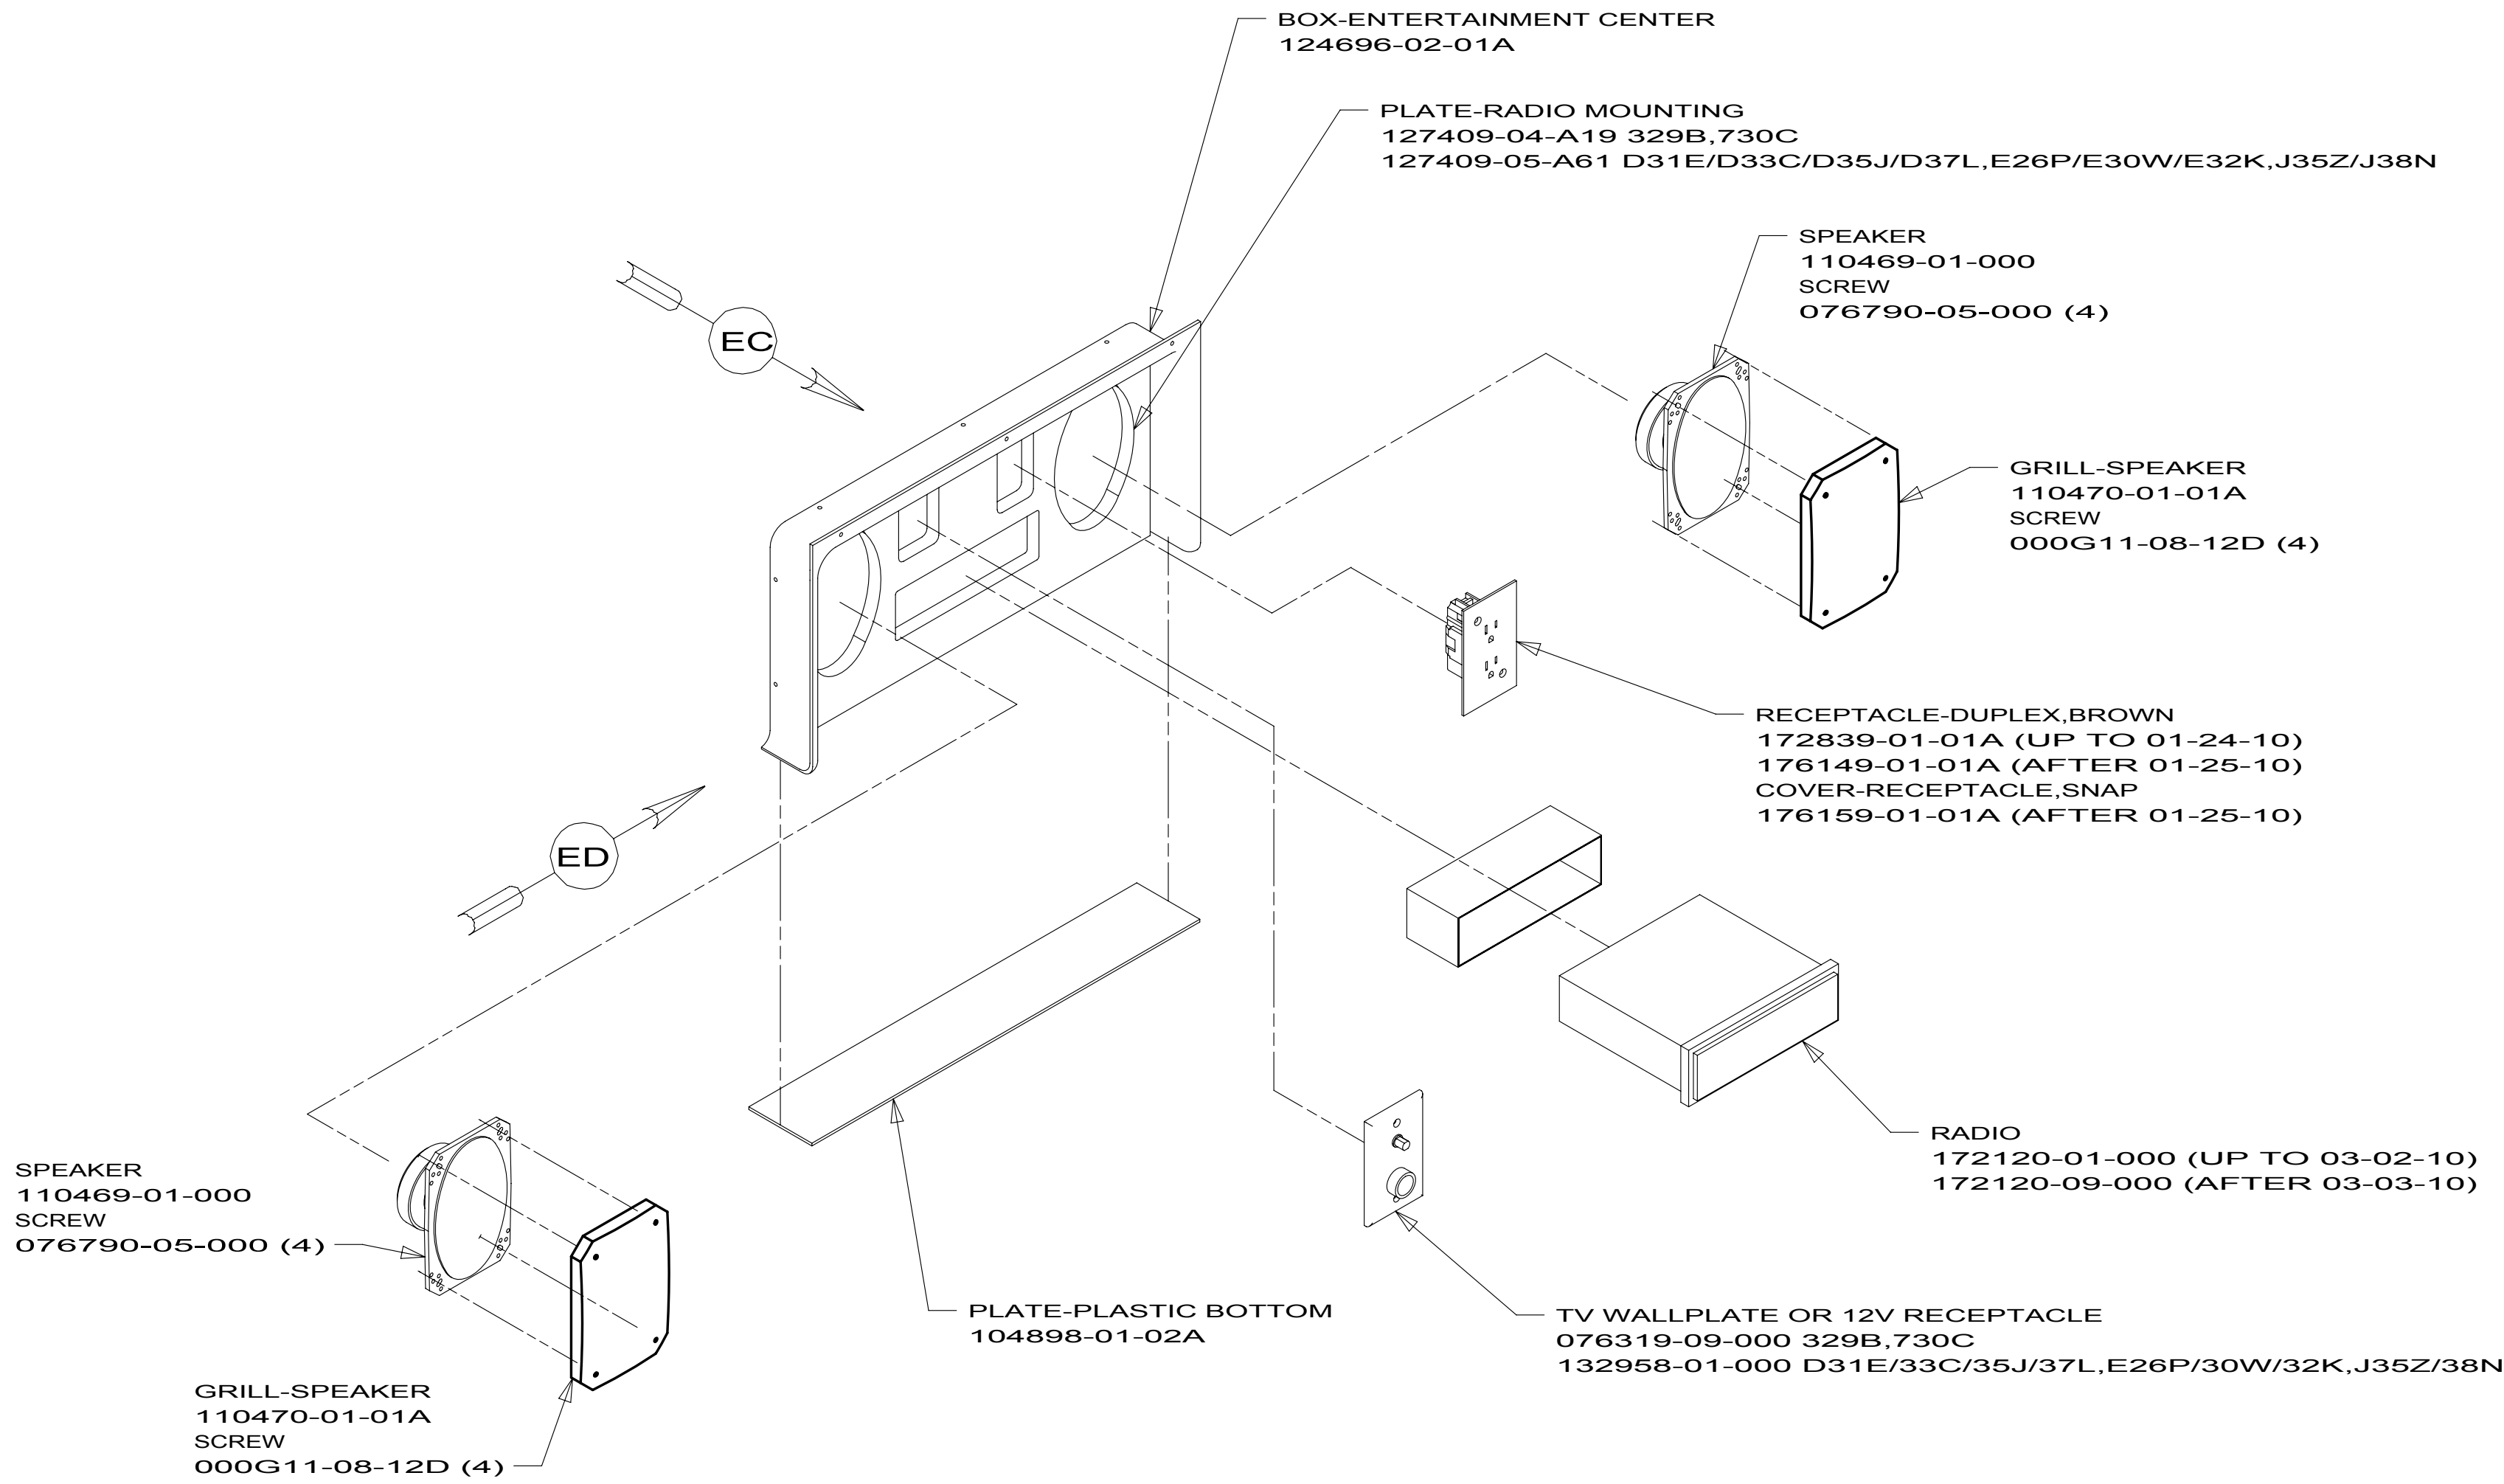

173464-03
329B
730C

173464-07
D31E
D33C
D35J
D37L
E26P
E30W
E32K
J35Z
J38N

1. SEE WIRING INSTL-BODY FOR ADDITIONAL INFORMATION.
NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


1D5 ENTERTAINMENT CENTER/EXT W/CD

10 MOTORHOMES

ENTERTAINMENT CENTER COMPL

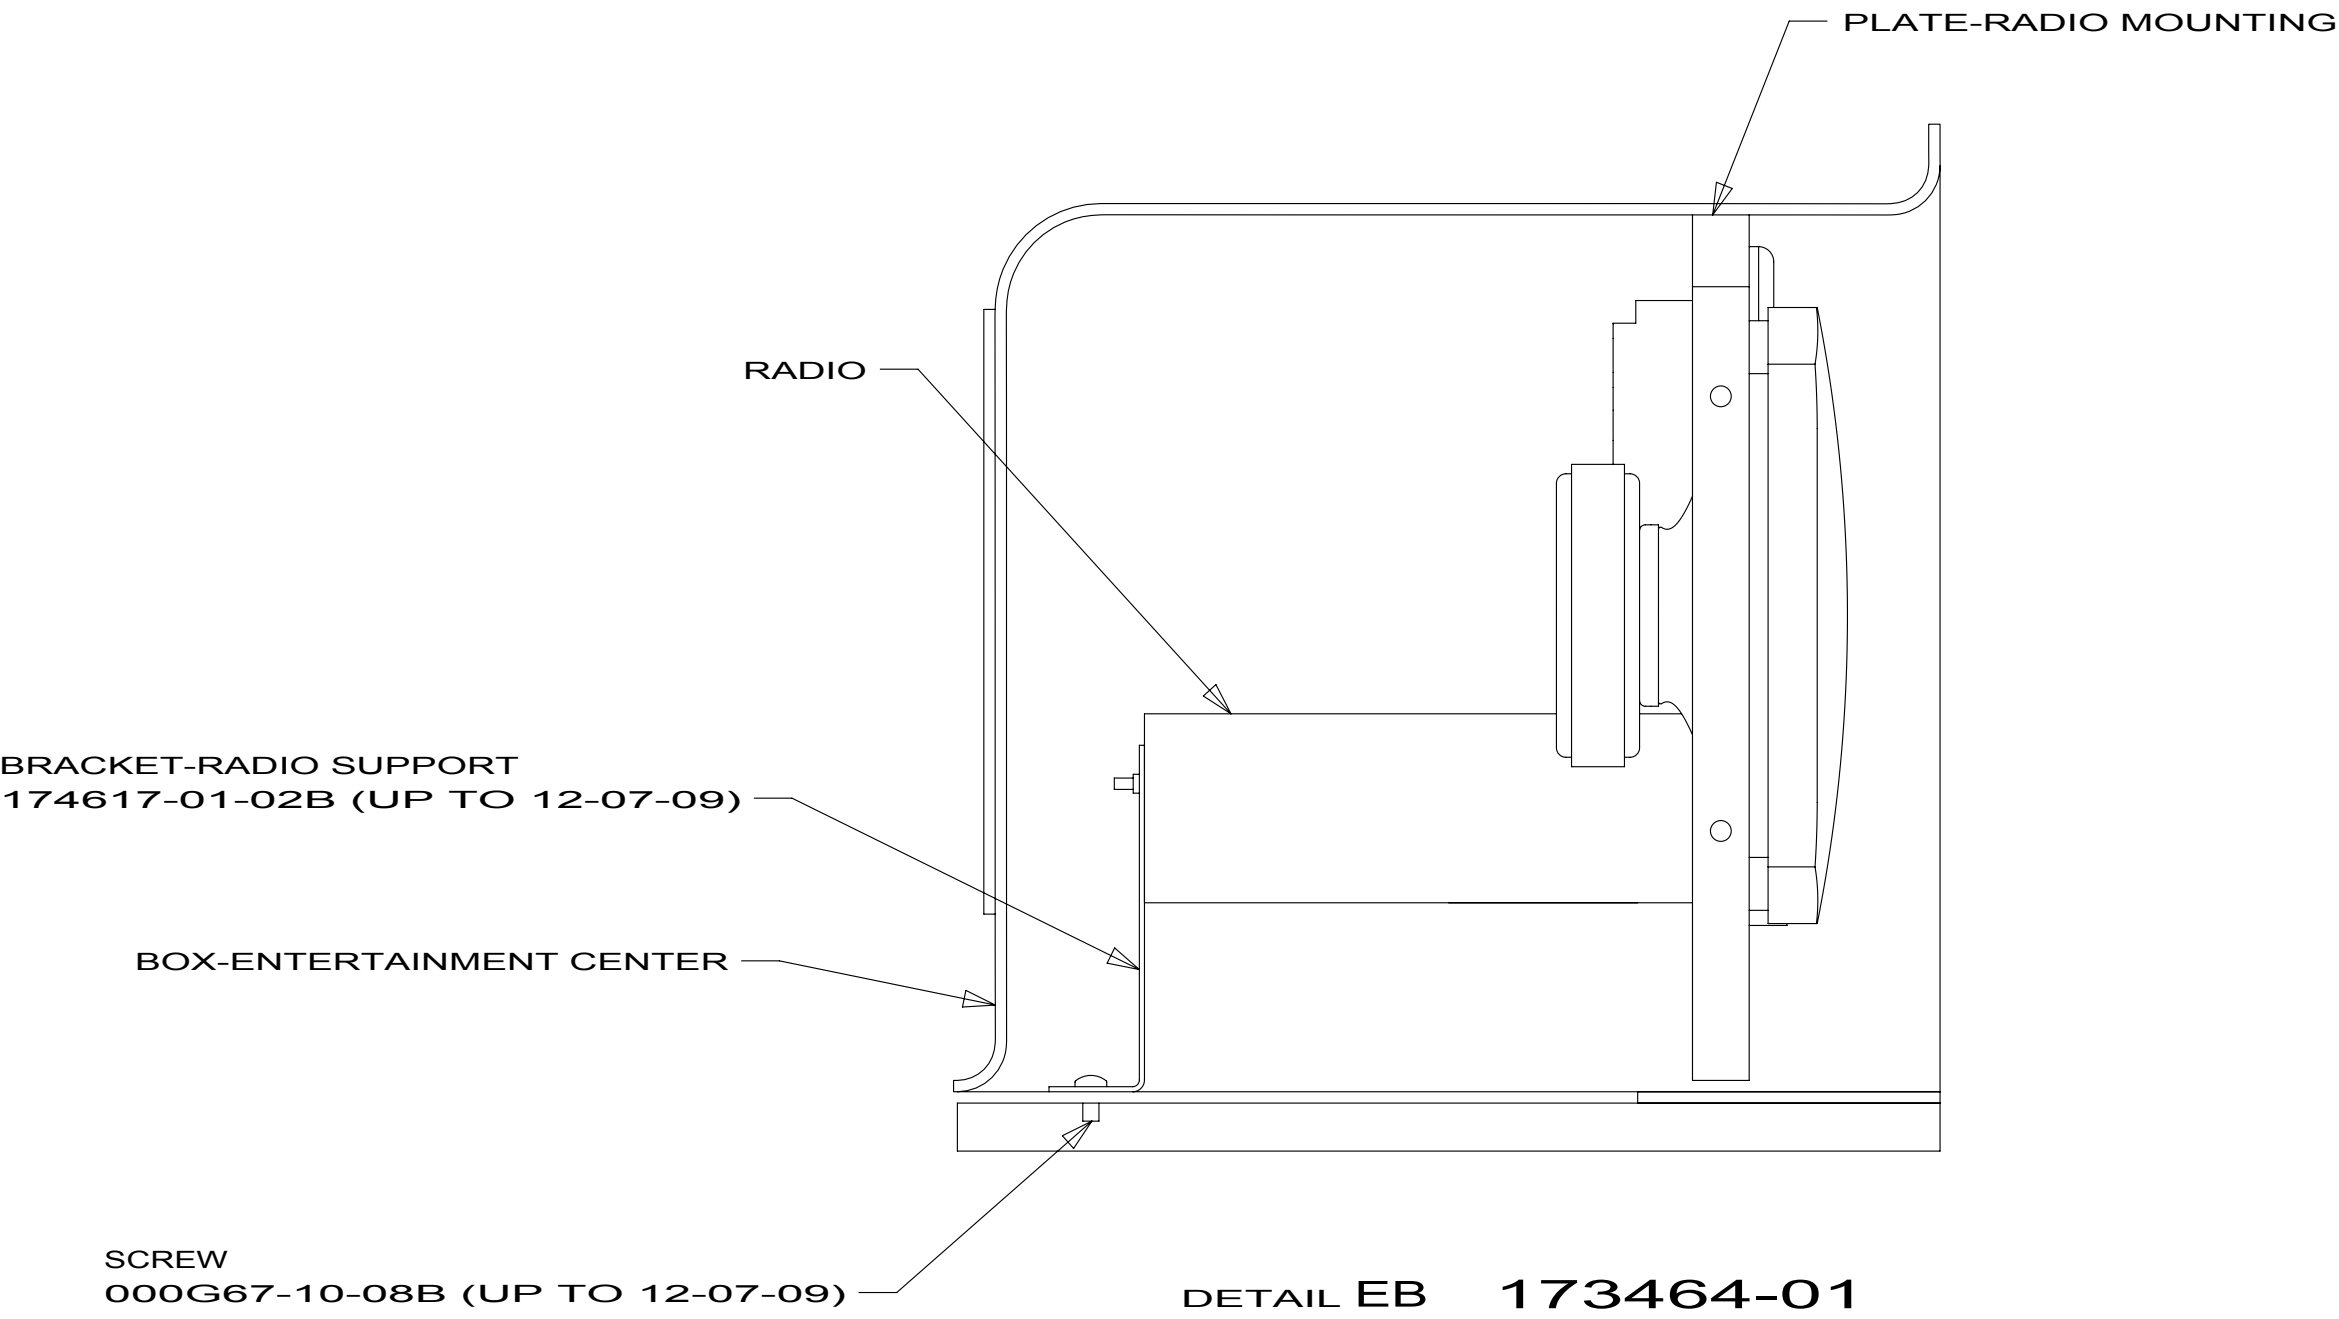


DETAIL EB 173464-01

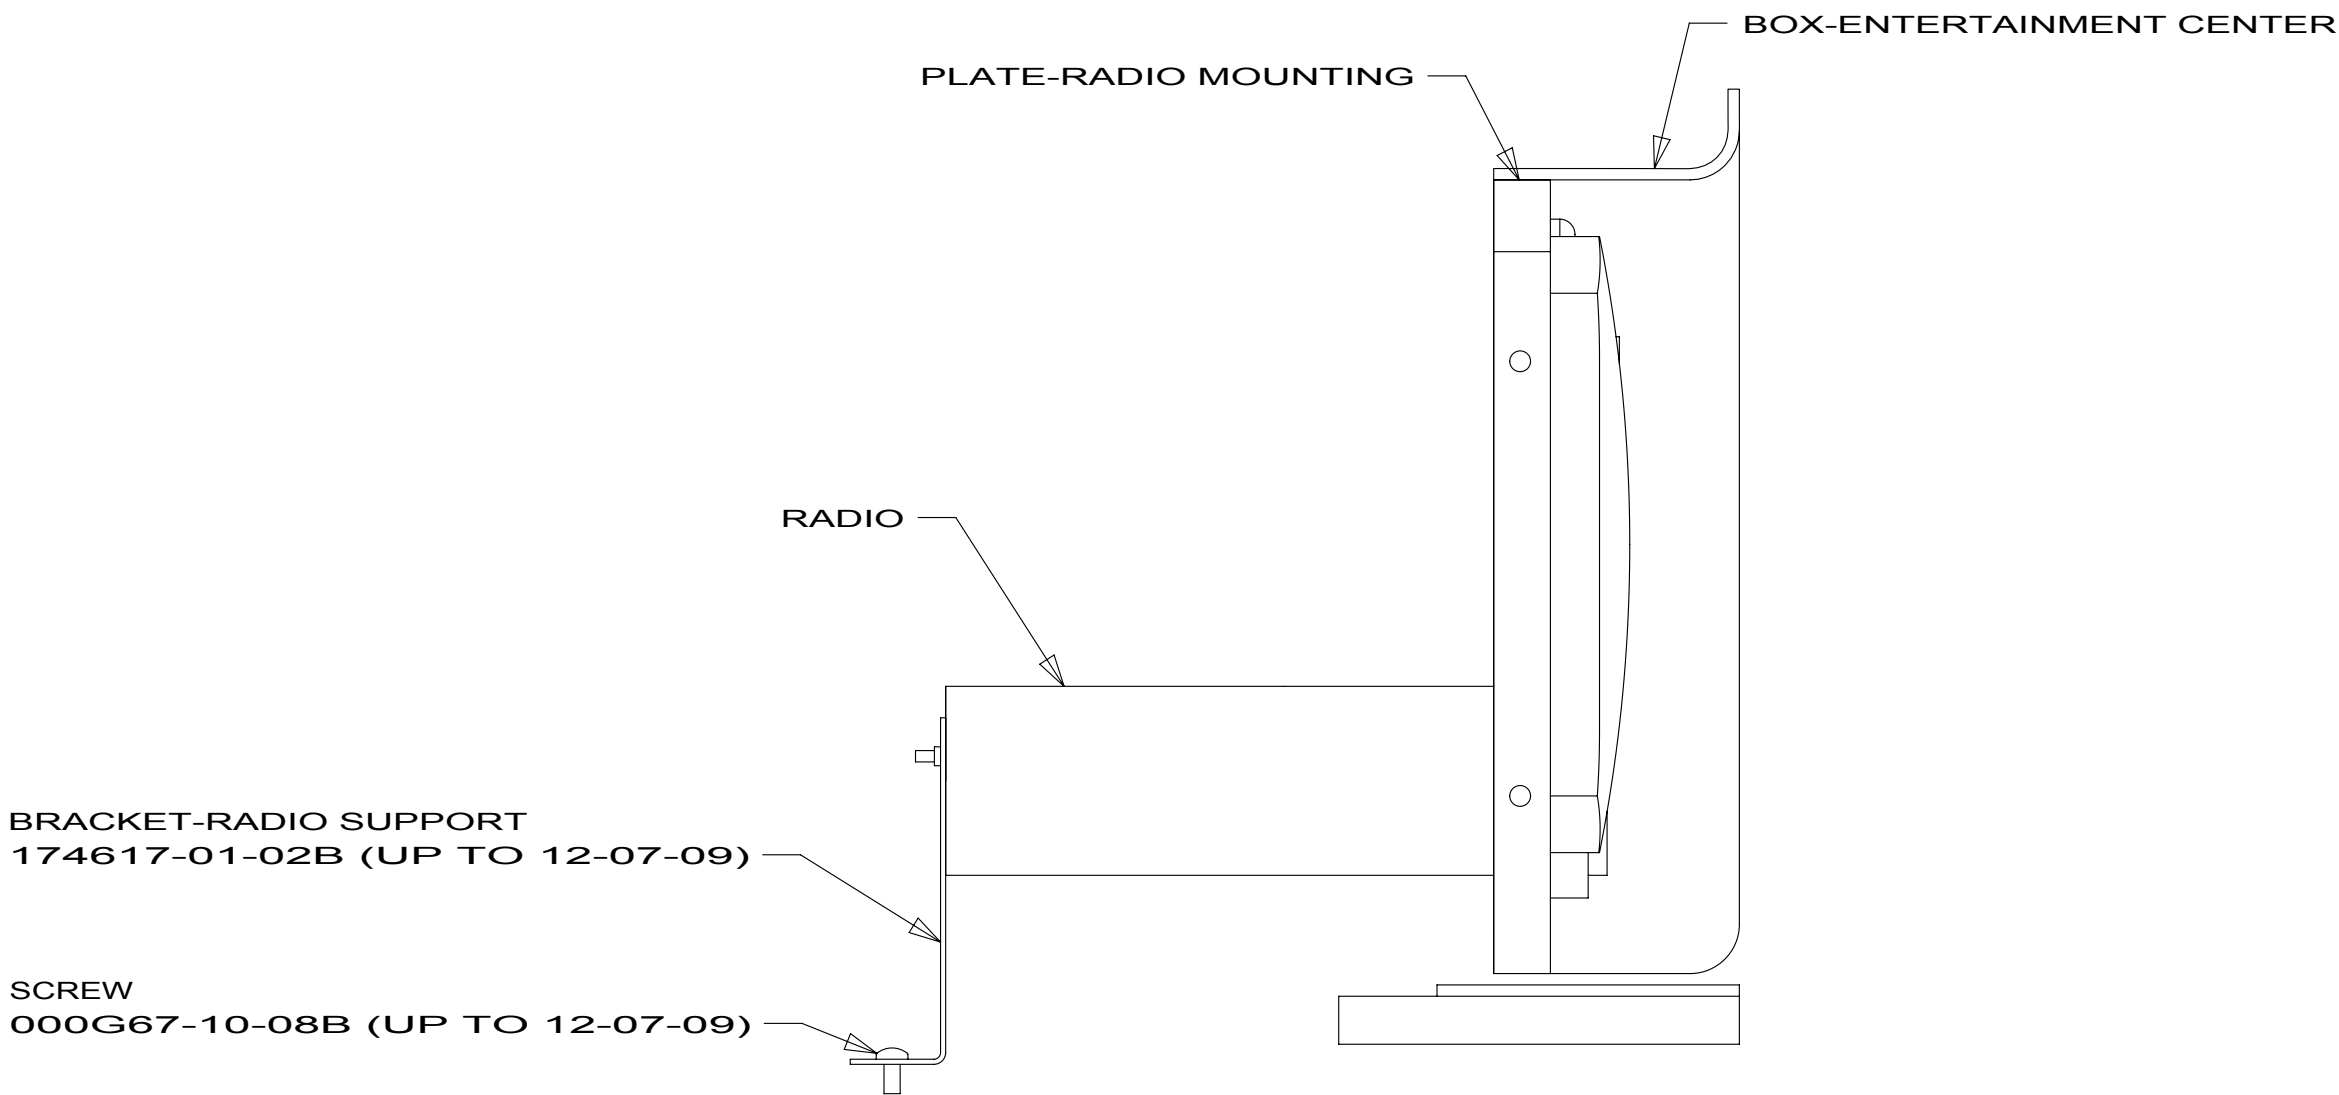


DETAIL ED 173464-03
173464-07
173464-08

173464-01
173464-03
173464-07
173464-08

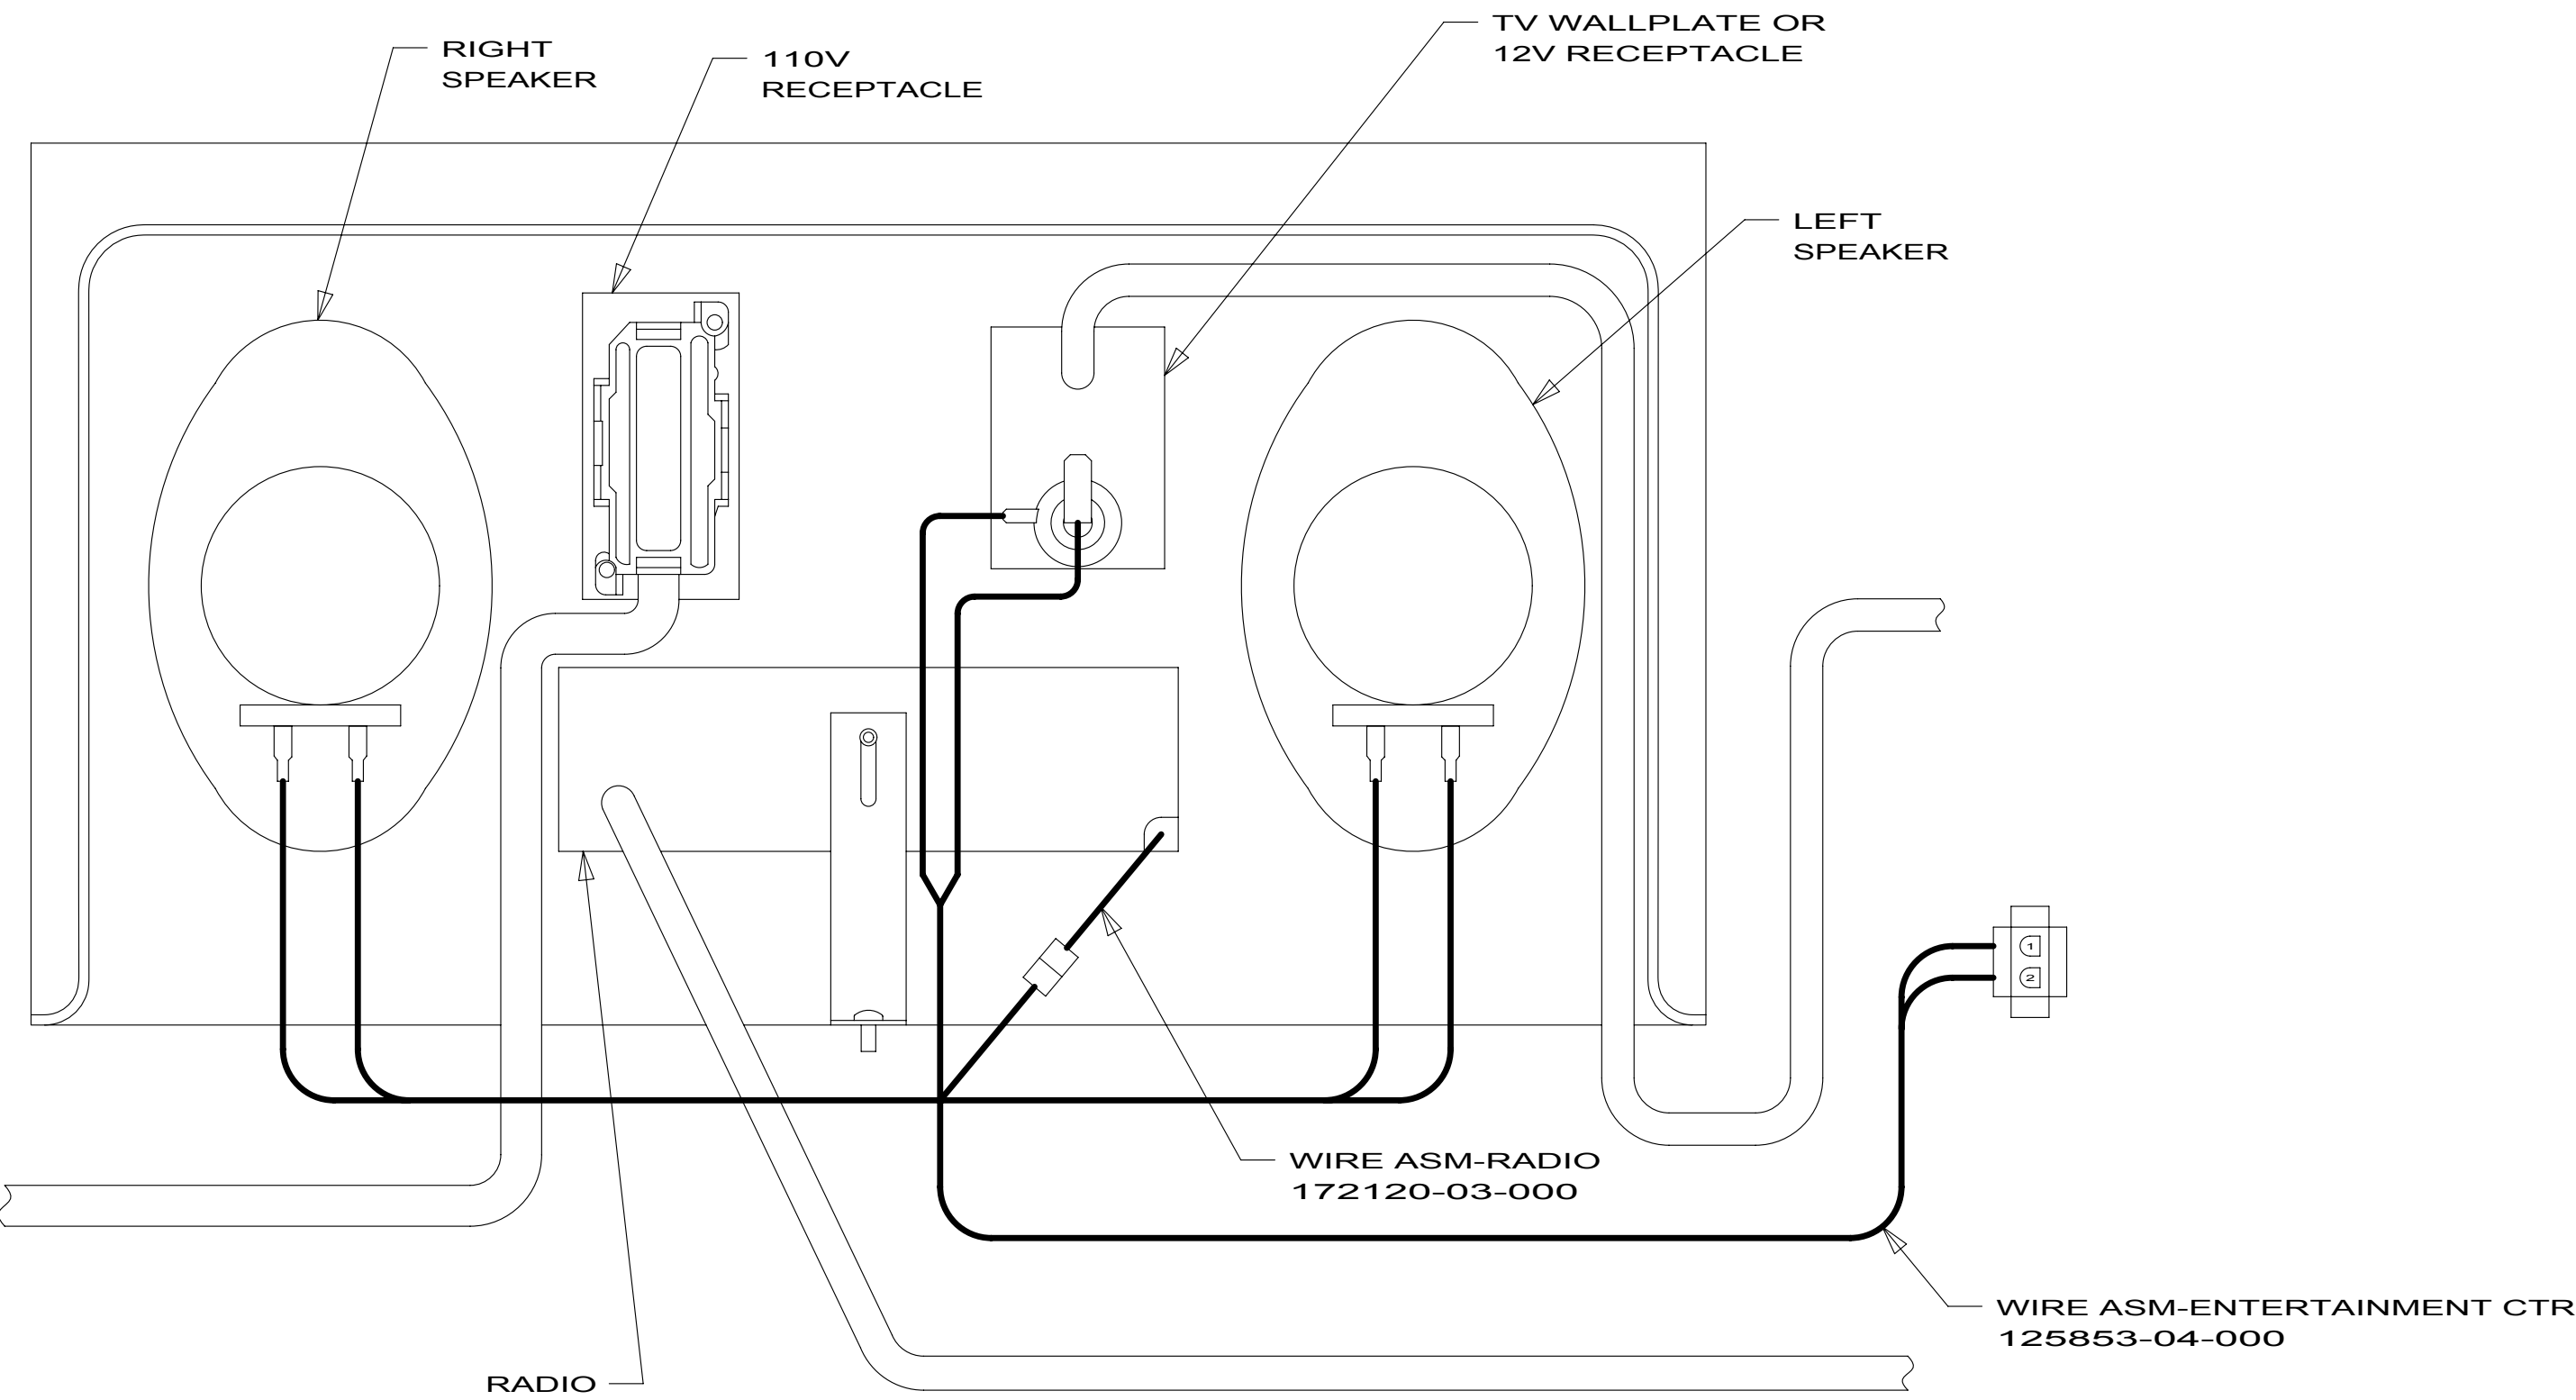

DETAIL EA 173464-01

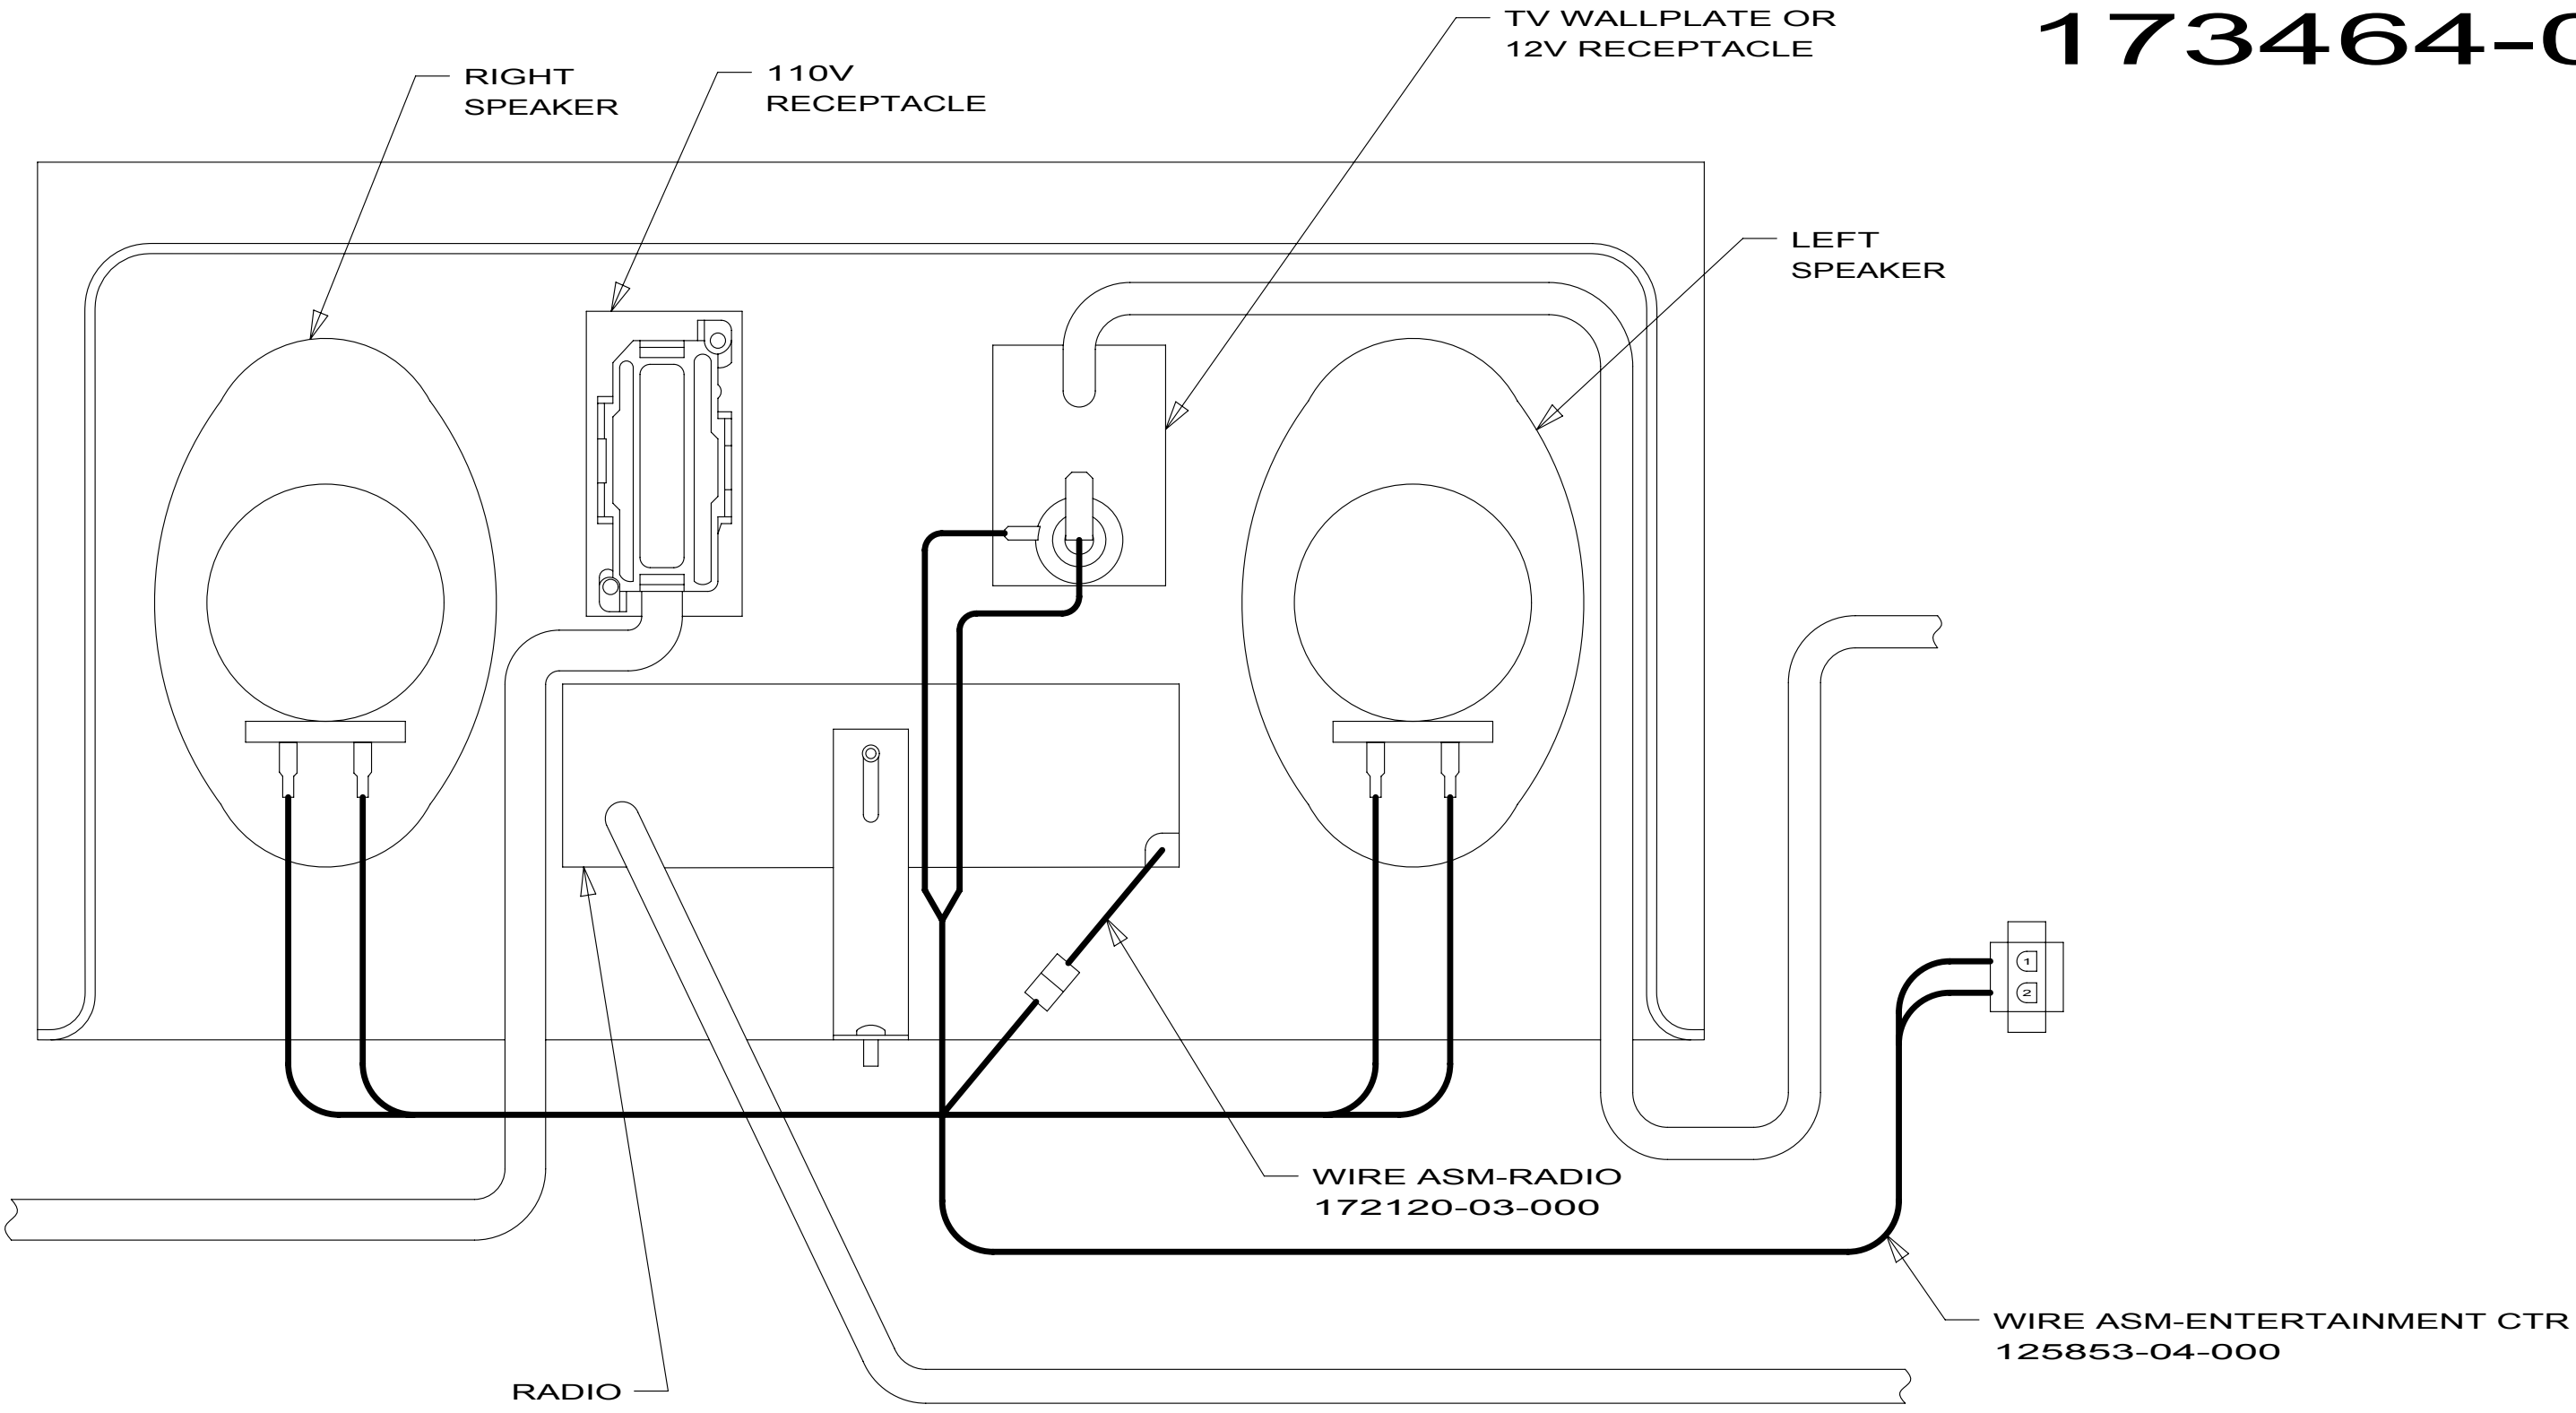

DETAIL EC 173464-03
173464-07
173464-08

1D5 ENTERTAINMENT CENTER/EXT W/CD


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


X-X


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

10 MOTORHOMES

ENTERTAINMENT CENTER COMPL

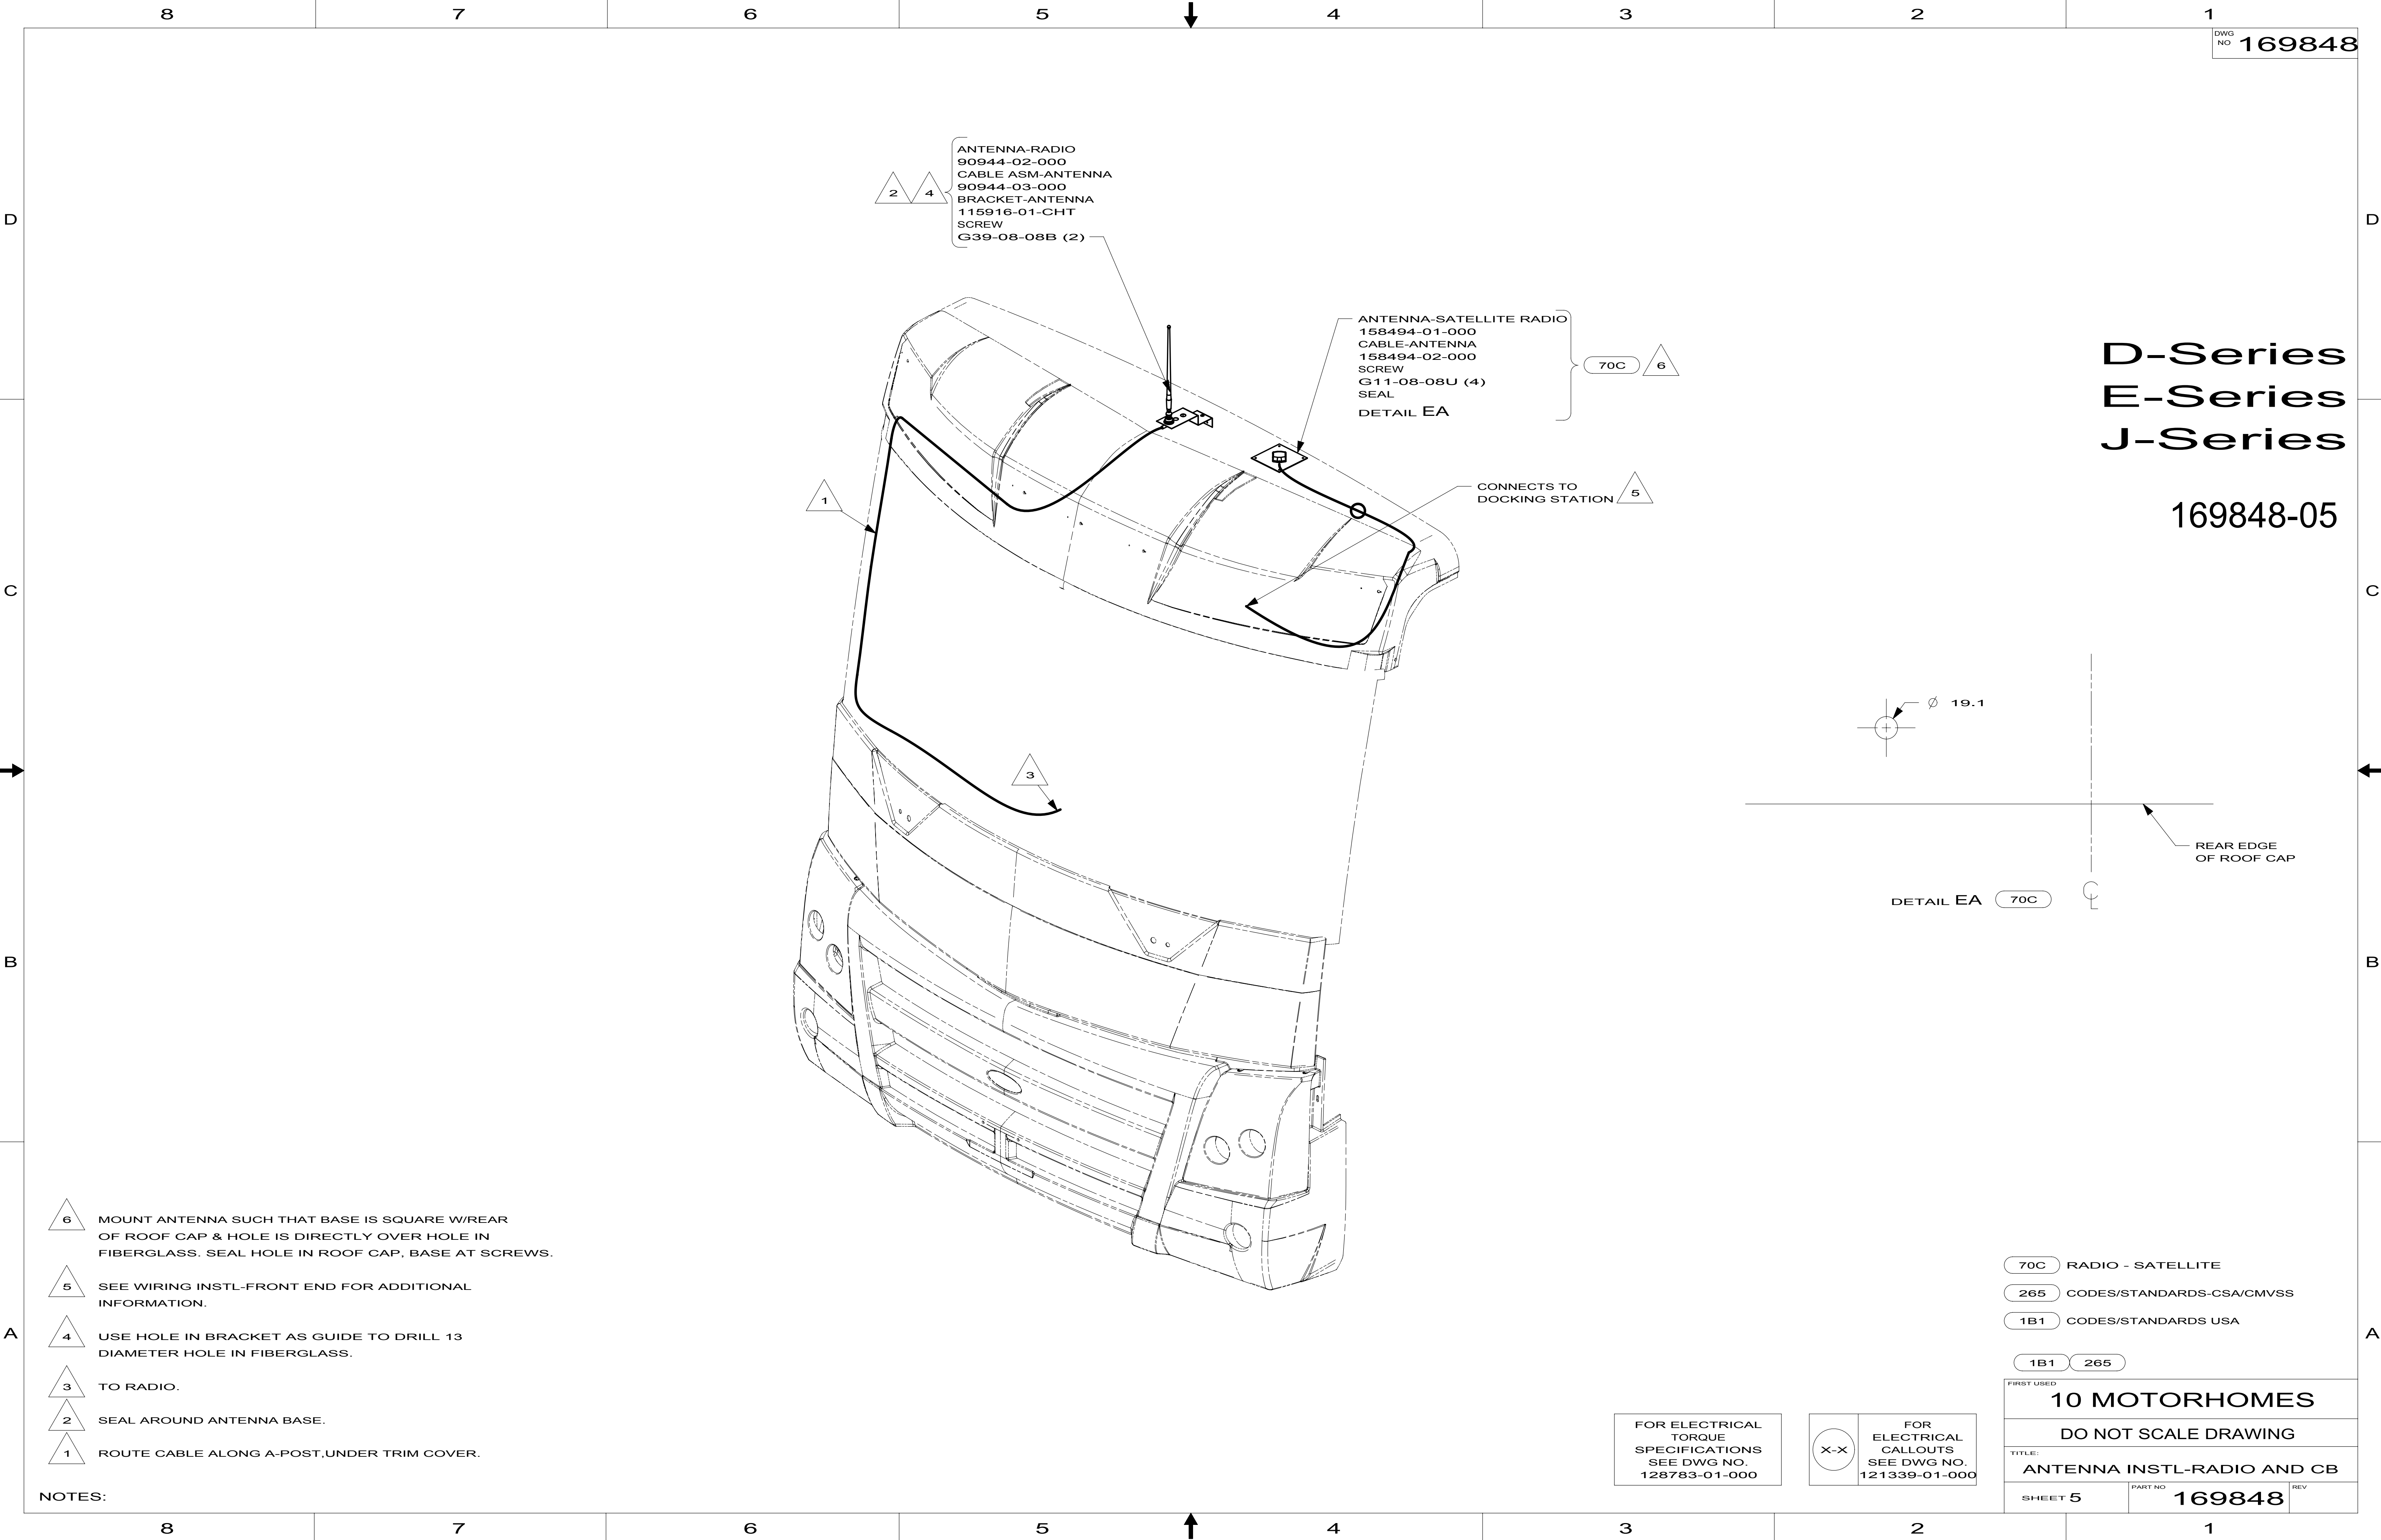

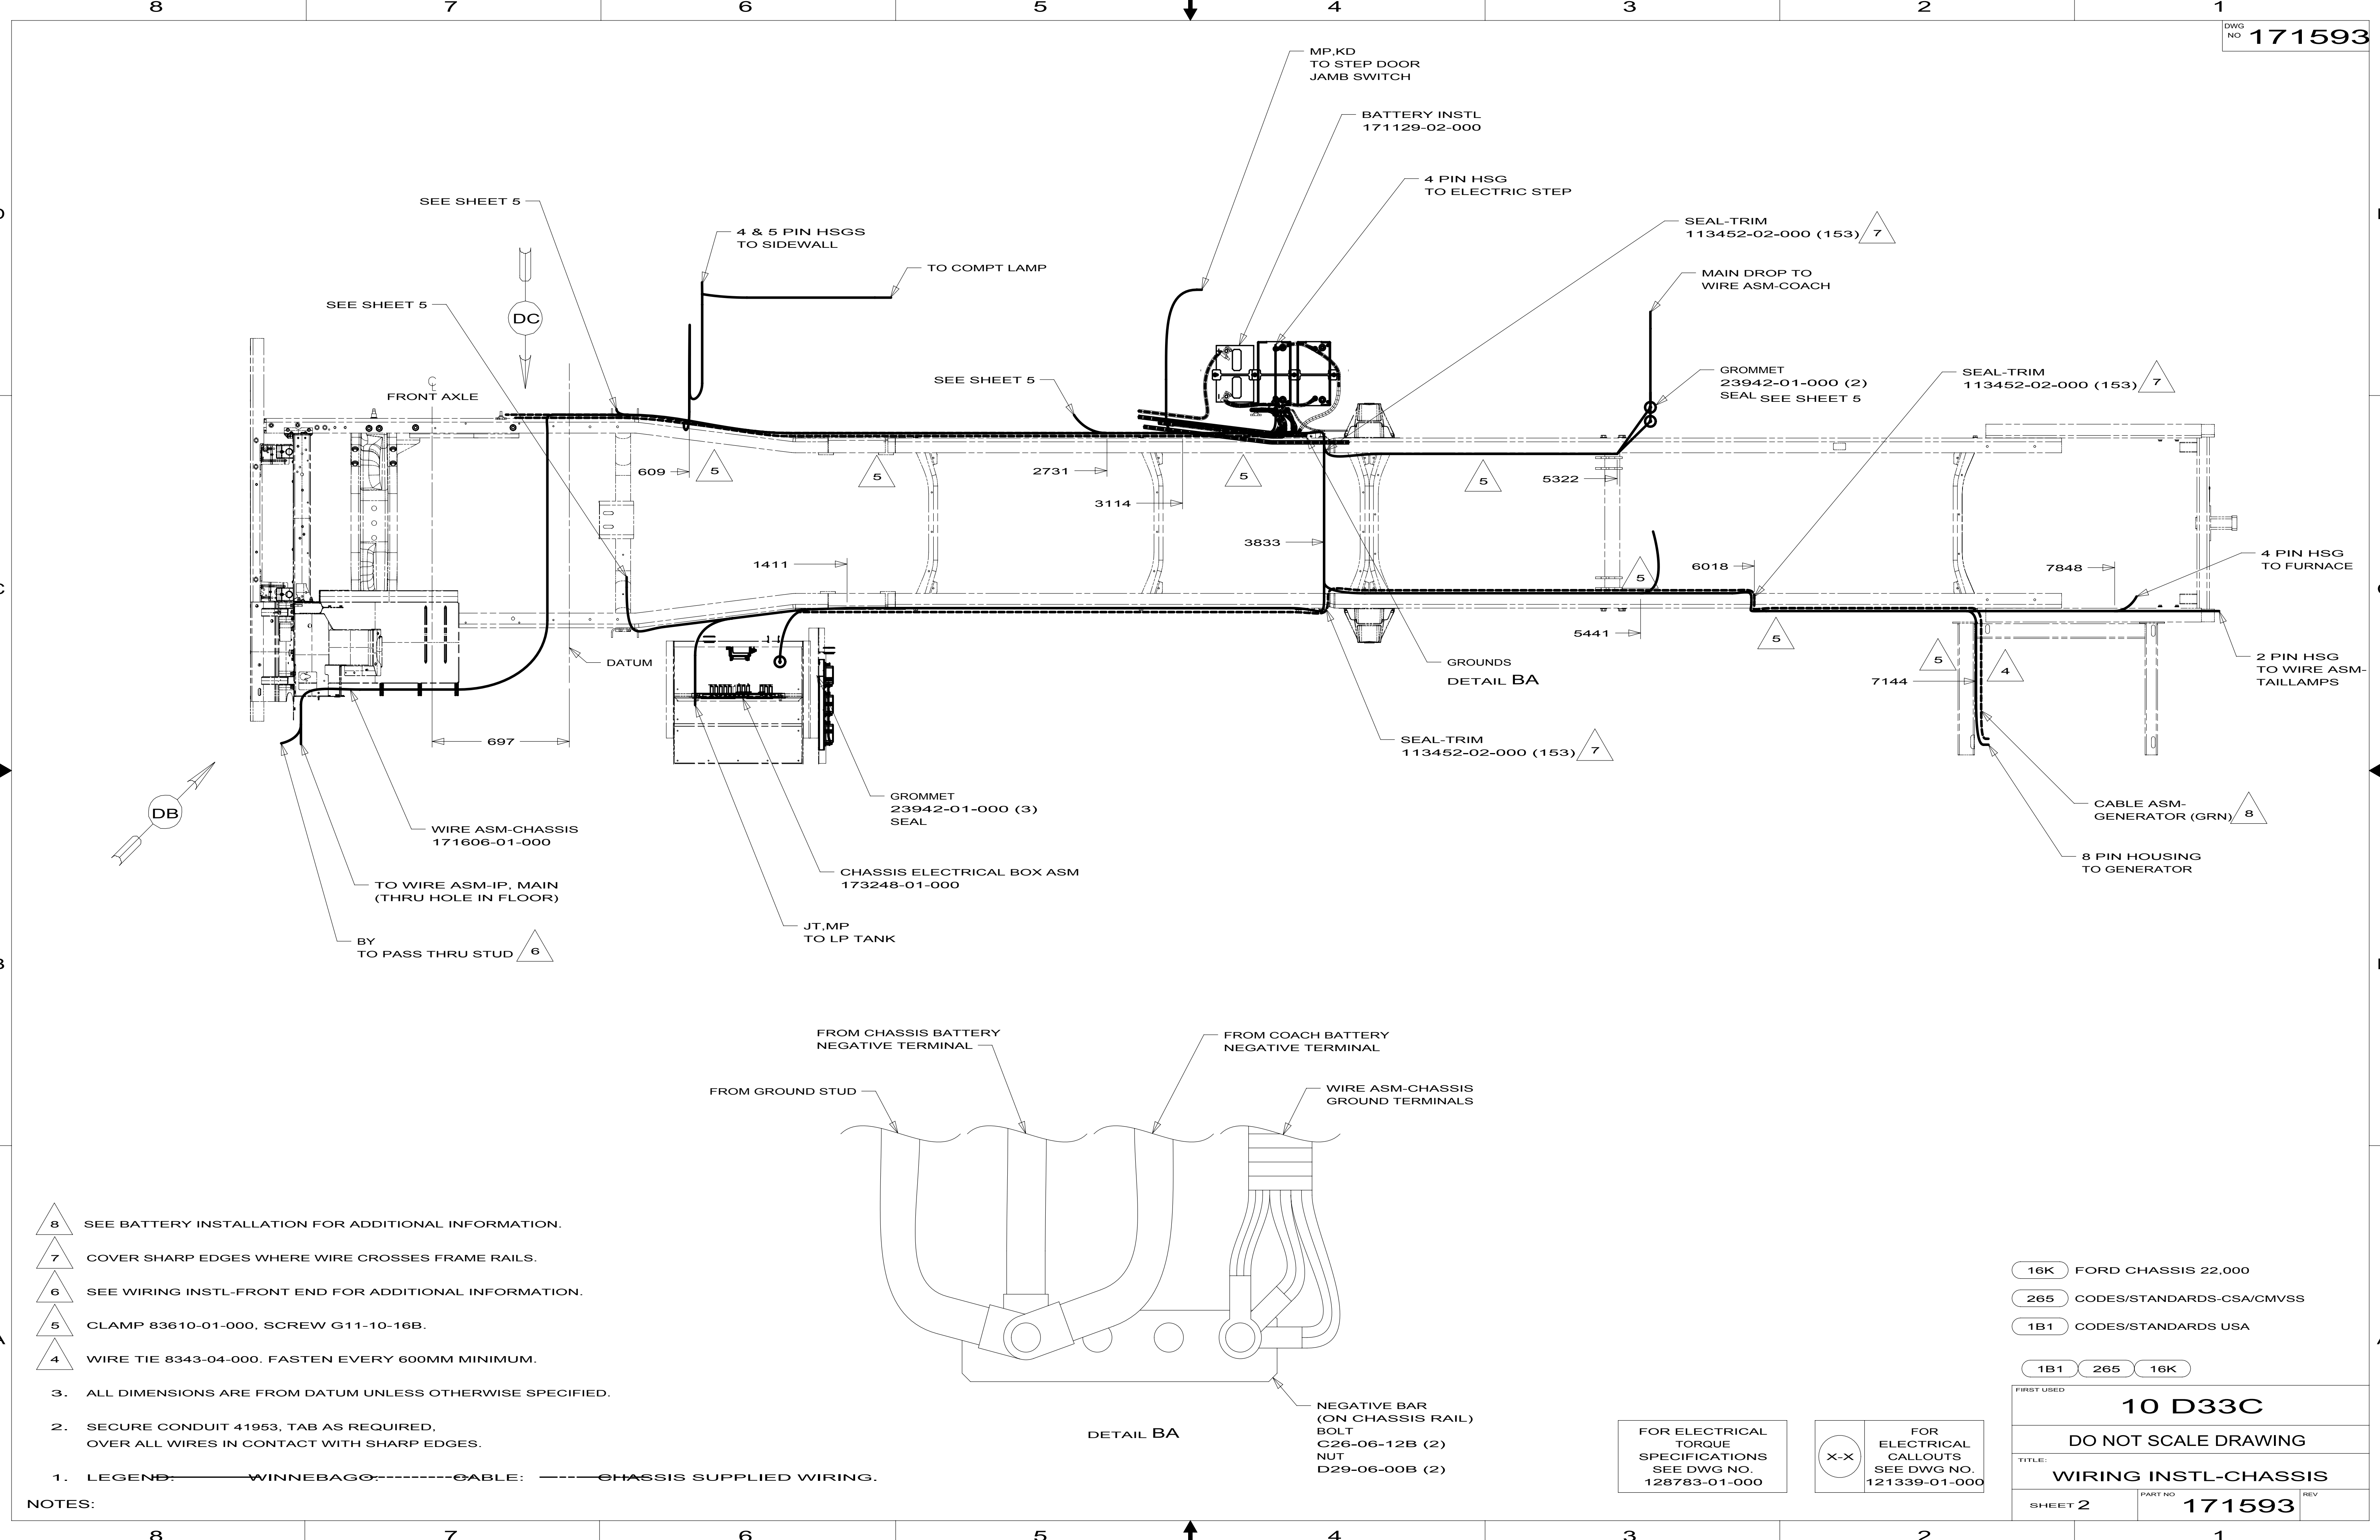


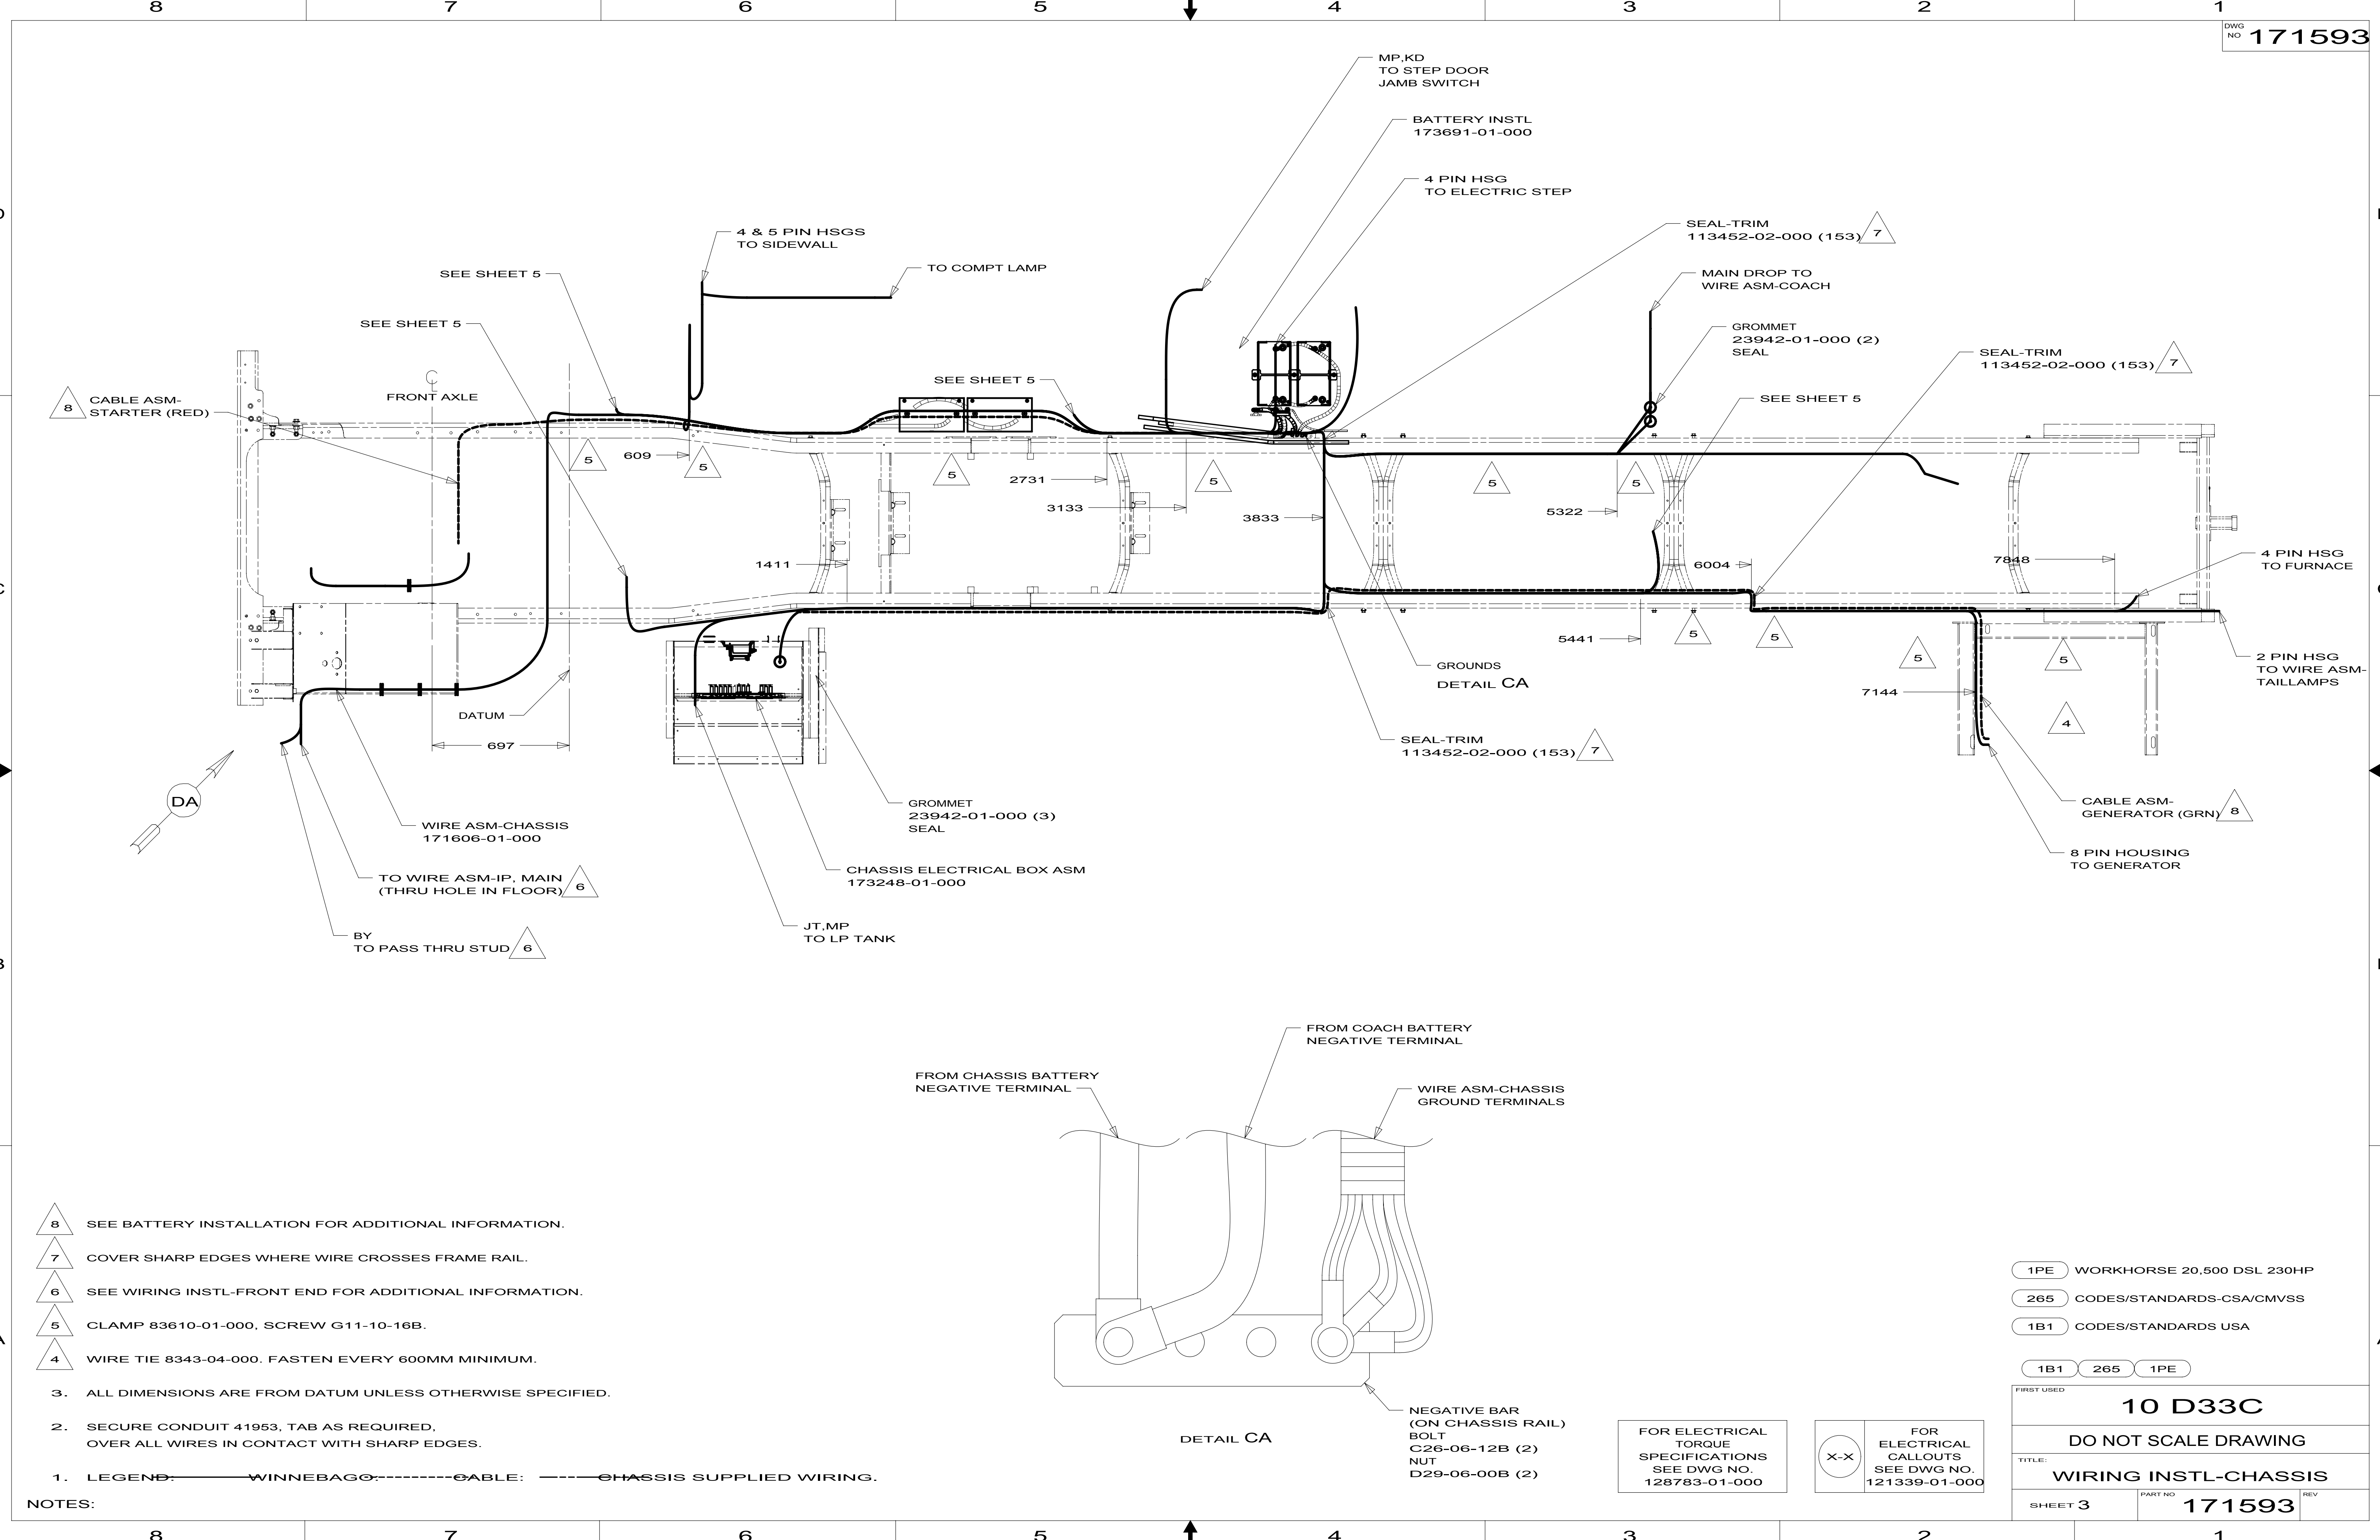

- 8 SEE BATTERY INSTALLATION FOR ADDITIONAL INFORMATION.
- 7 COVER SHARP EDGES WHERE WIRE CROSSES FRAME RAIL.
- 6 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 5 CLAMP 83610-01-000, SCREW G11-10-16B.
- 4 WIRE TIE 8343-04-000. FASTEN EVERY 600MM MINIMUM.

- 3. ALL DIMENSIONS ARE FROM DATUM UNLESS OTHERWISE SPECIFIED.
- 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
- 1. LEGEND: — WINNEBAGO — CABLE: — CHASSIS SUPPLIED WIRING.

NOTES:

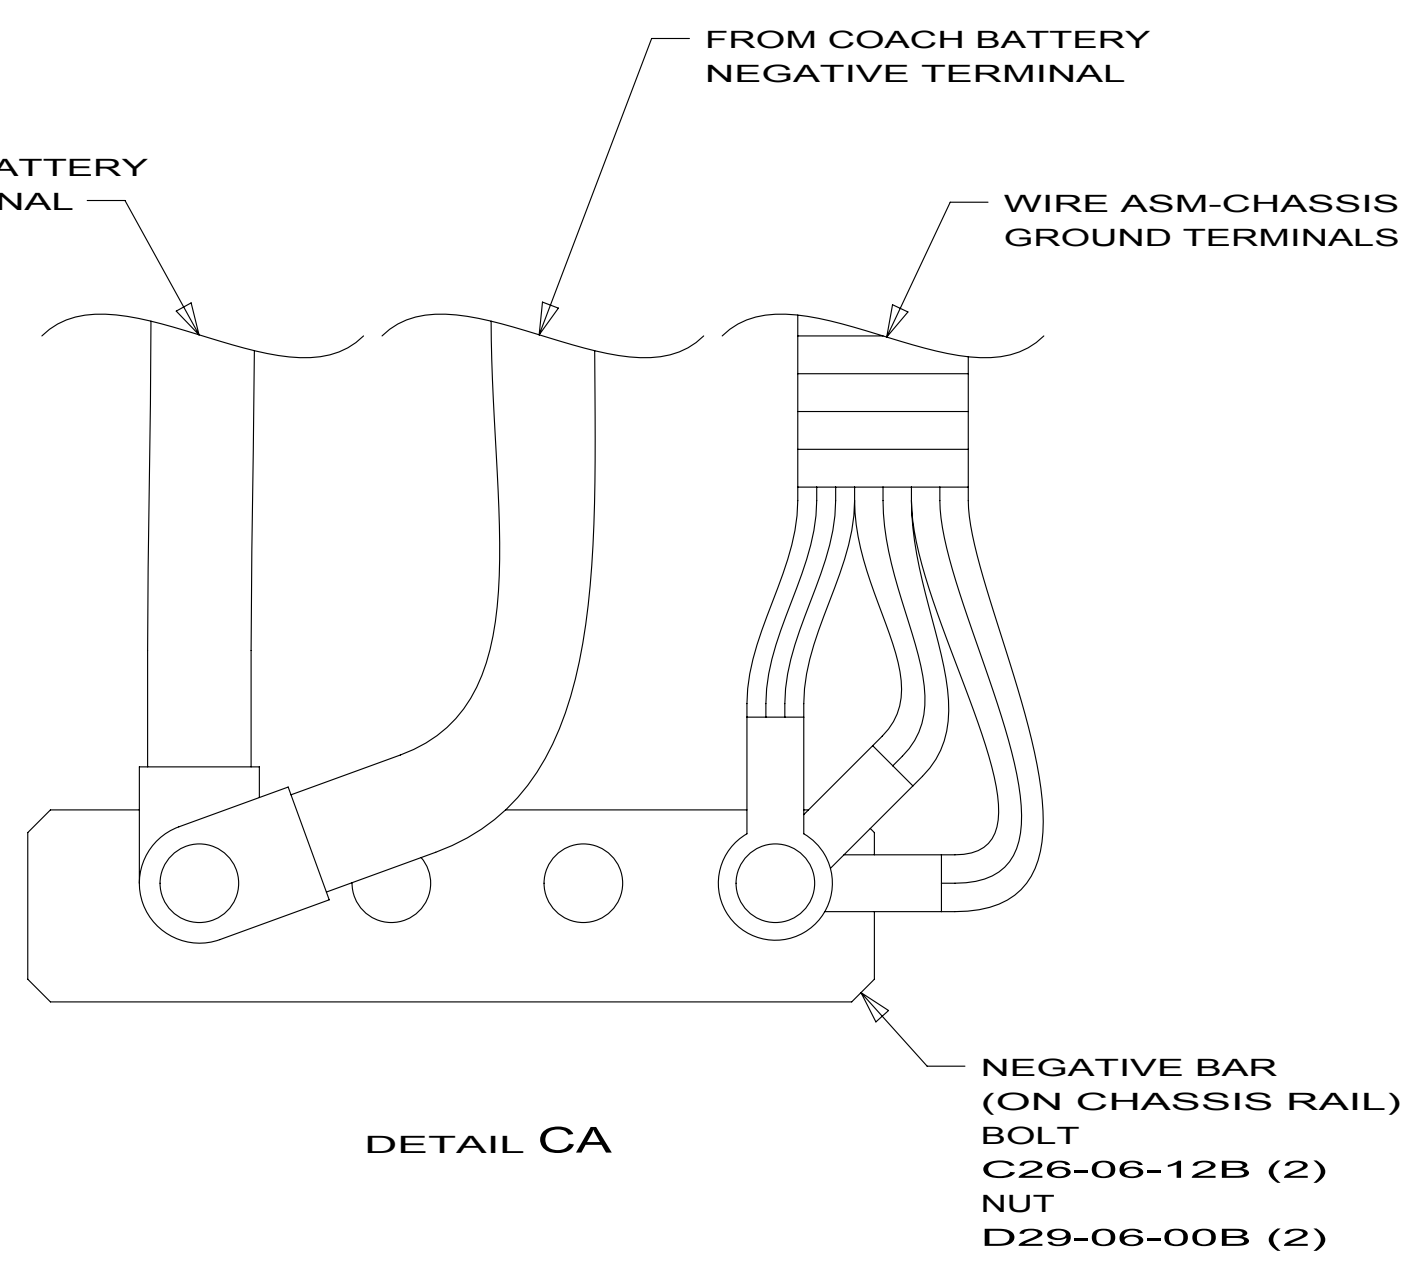




FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1PE WORKHORSE 20,500 DSL 230HP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 1PE

FIRST USED		
10 D33C		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-CHASSIS		
SHEET 3	PART NO 171593	REV

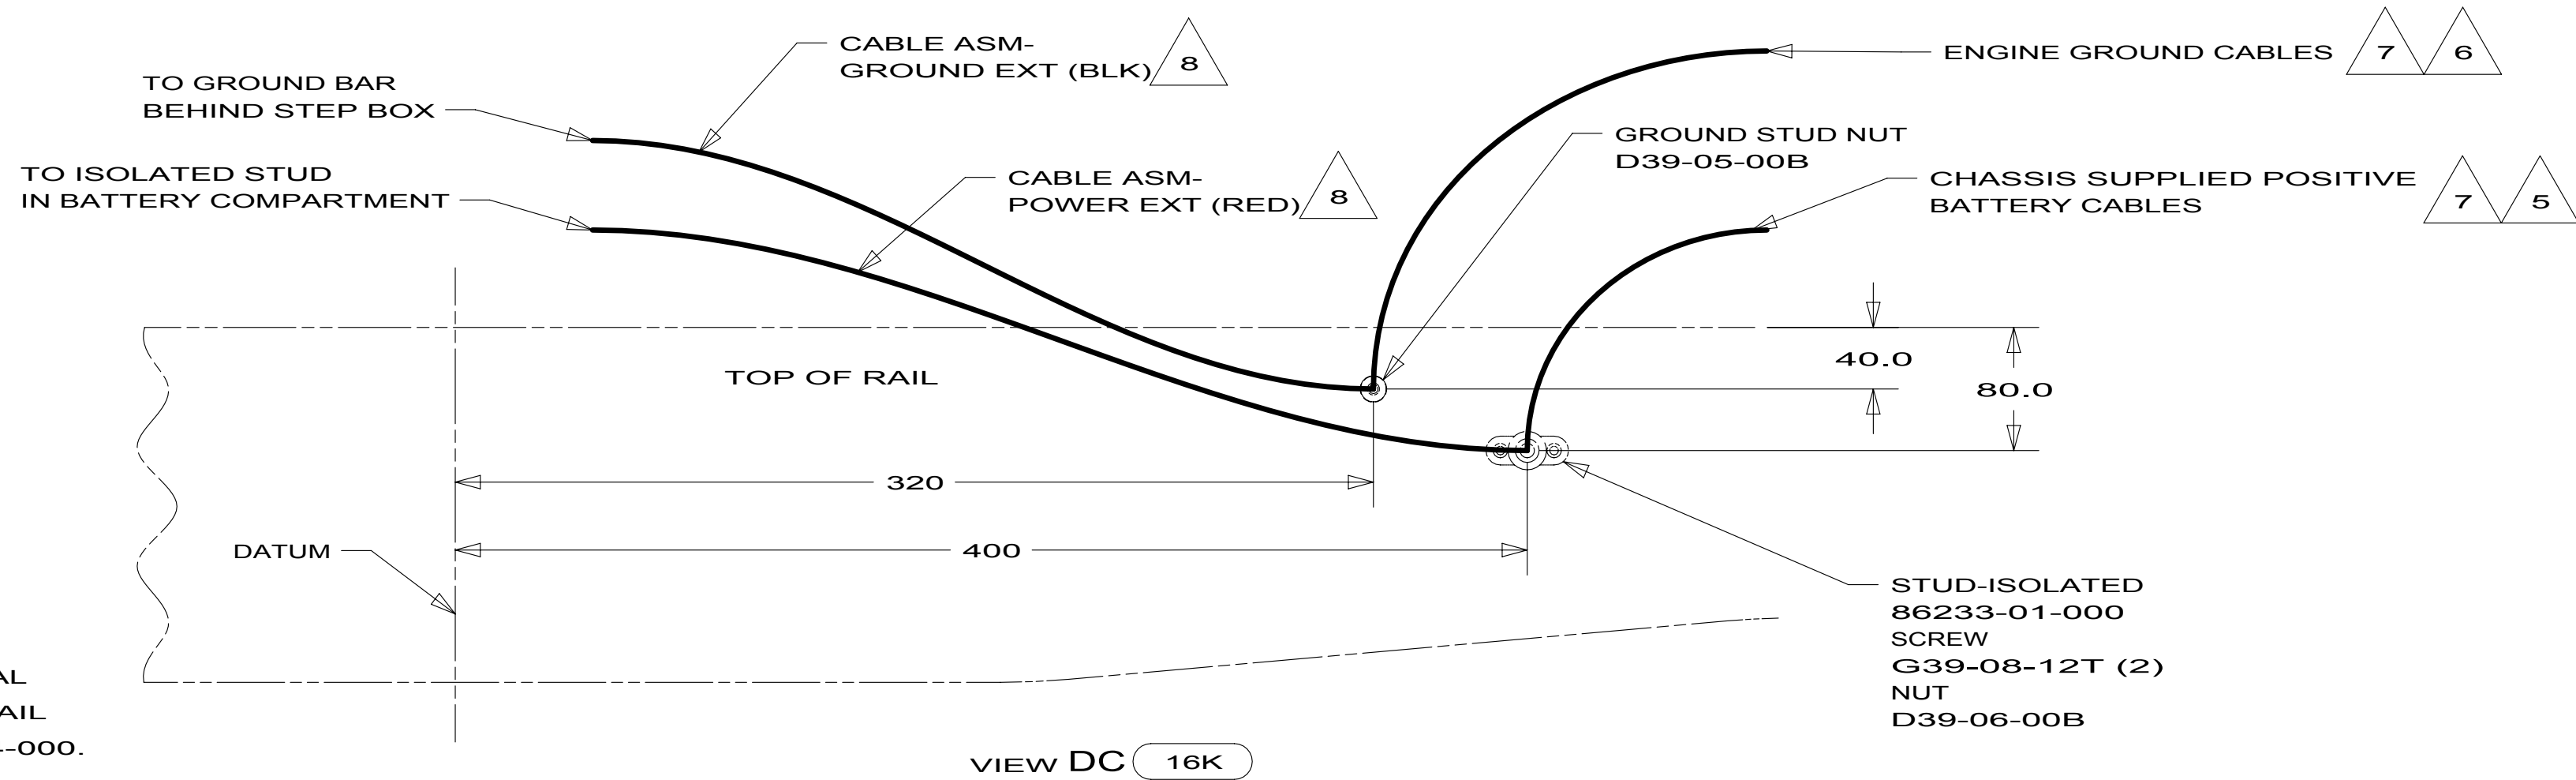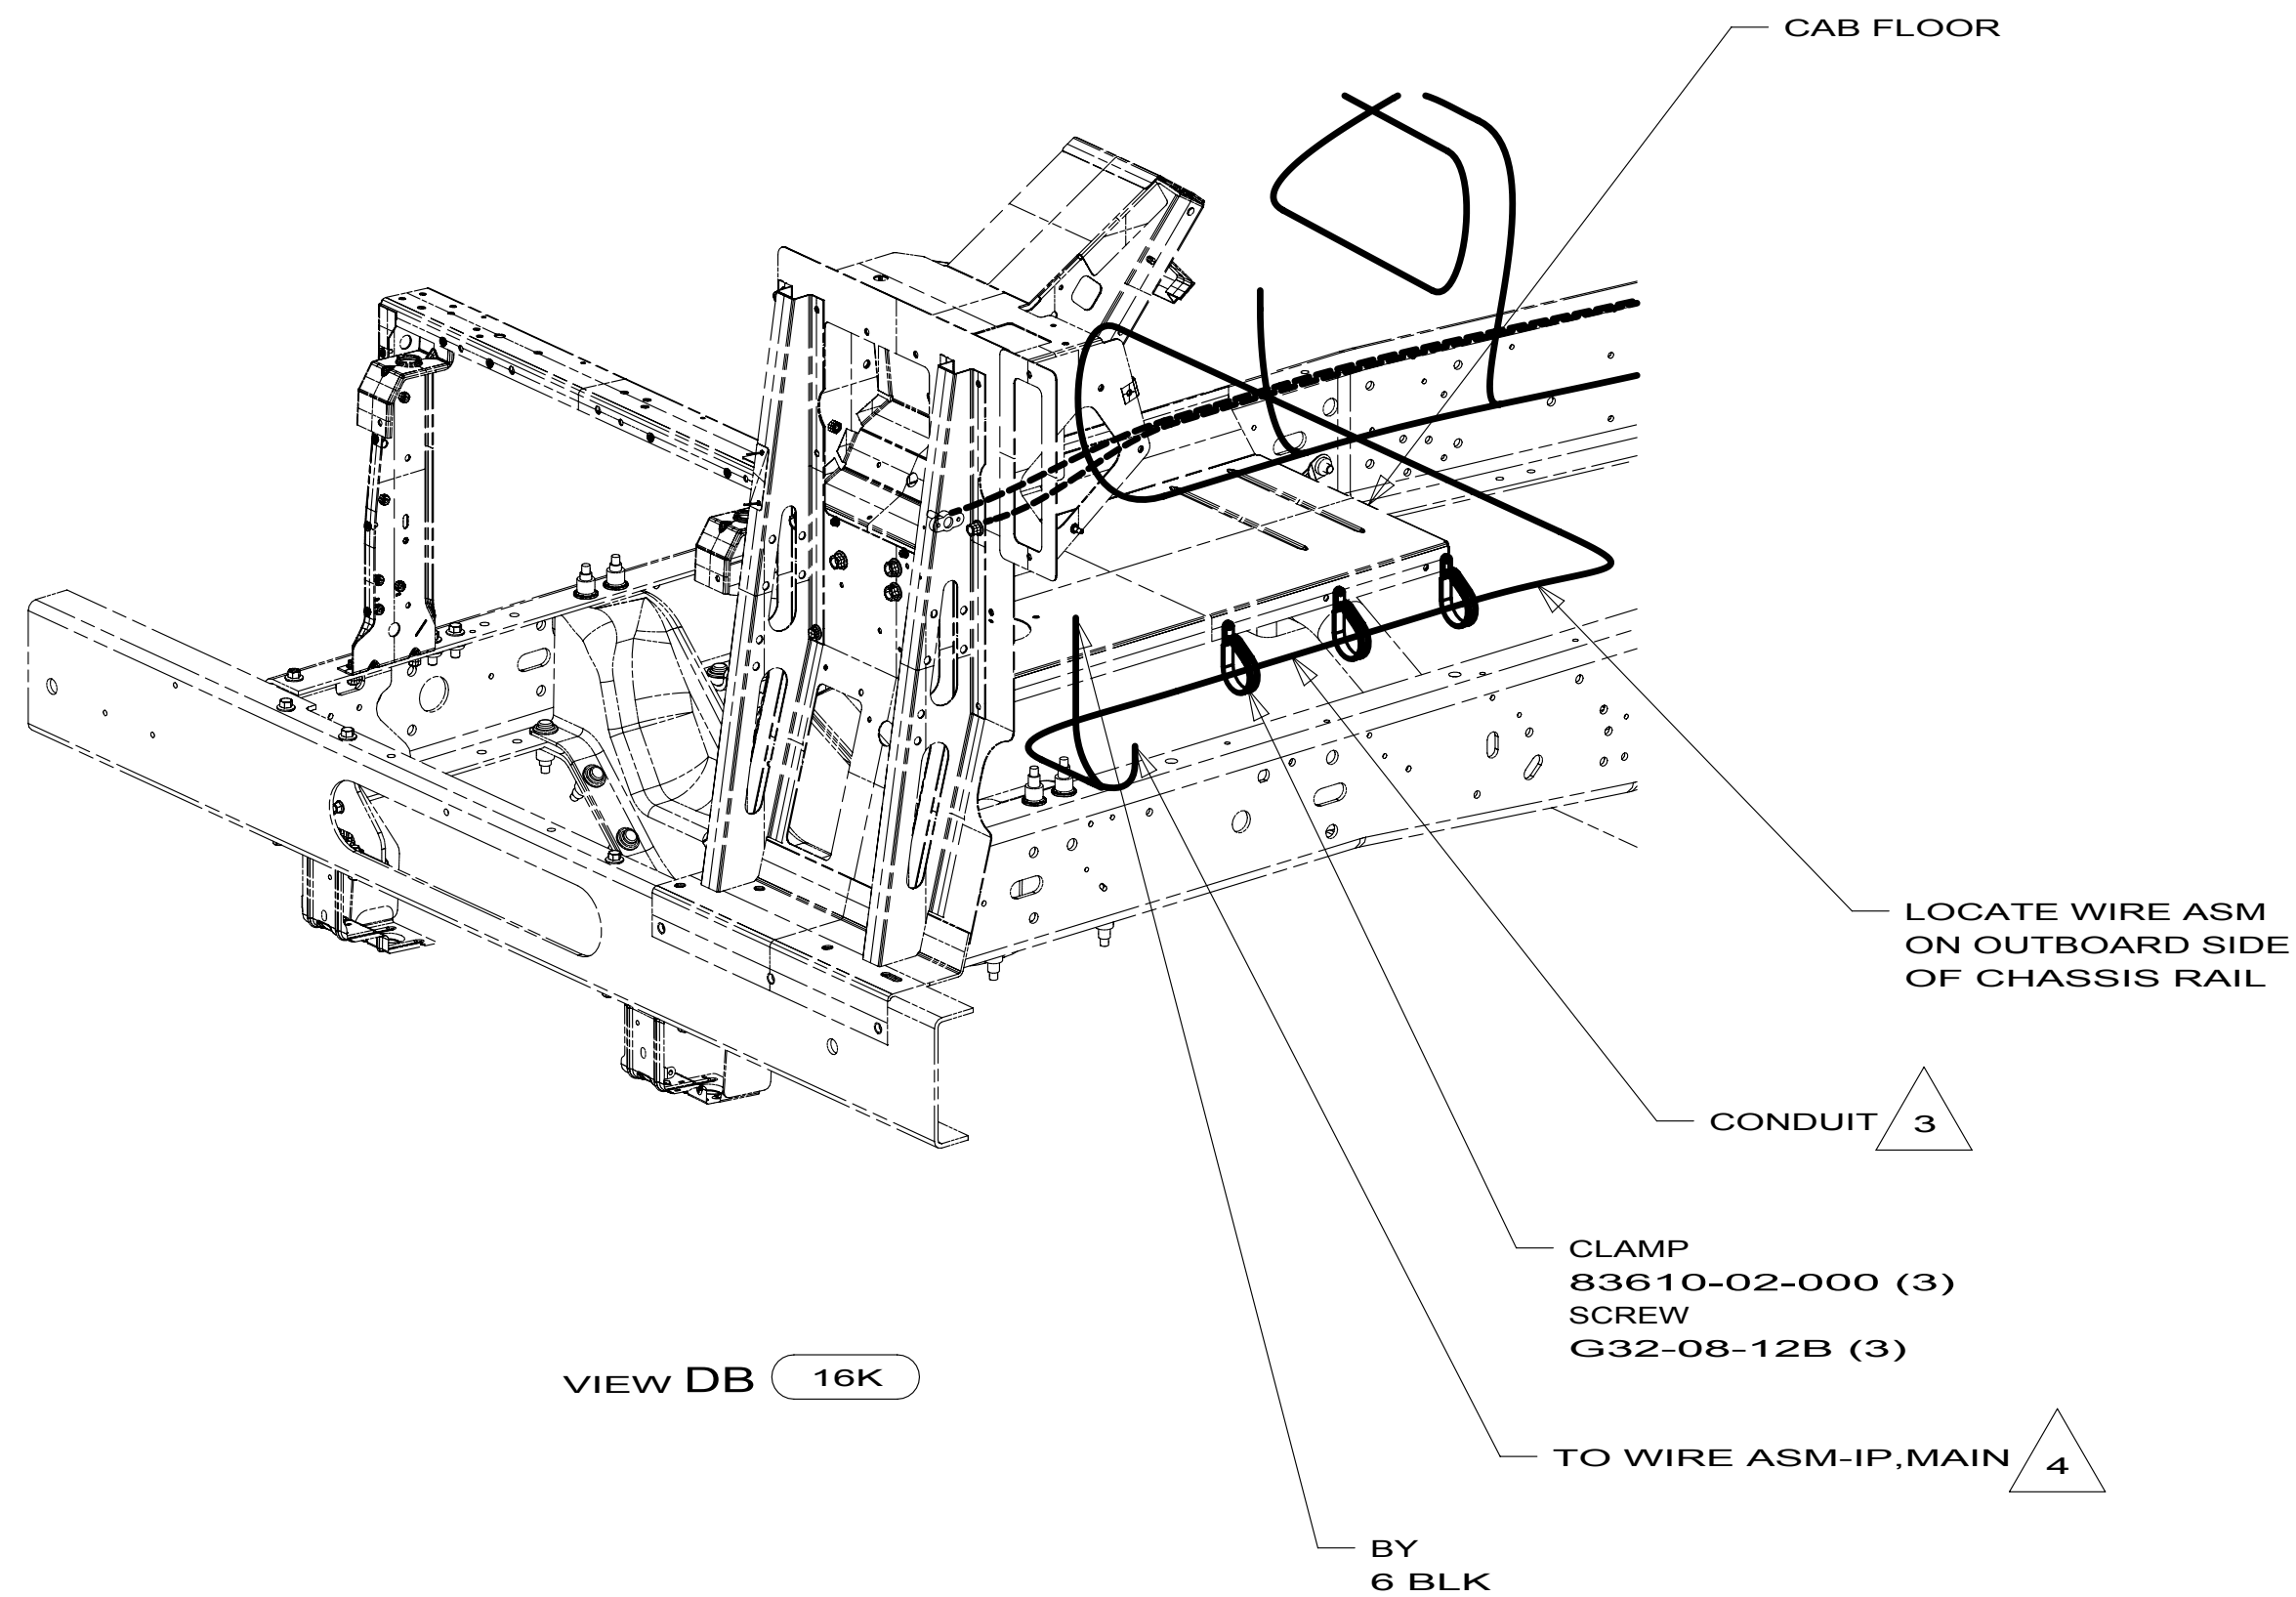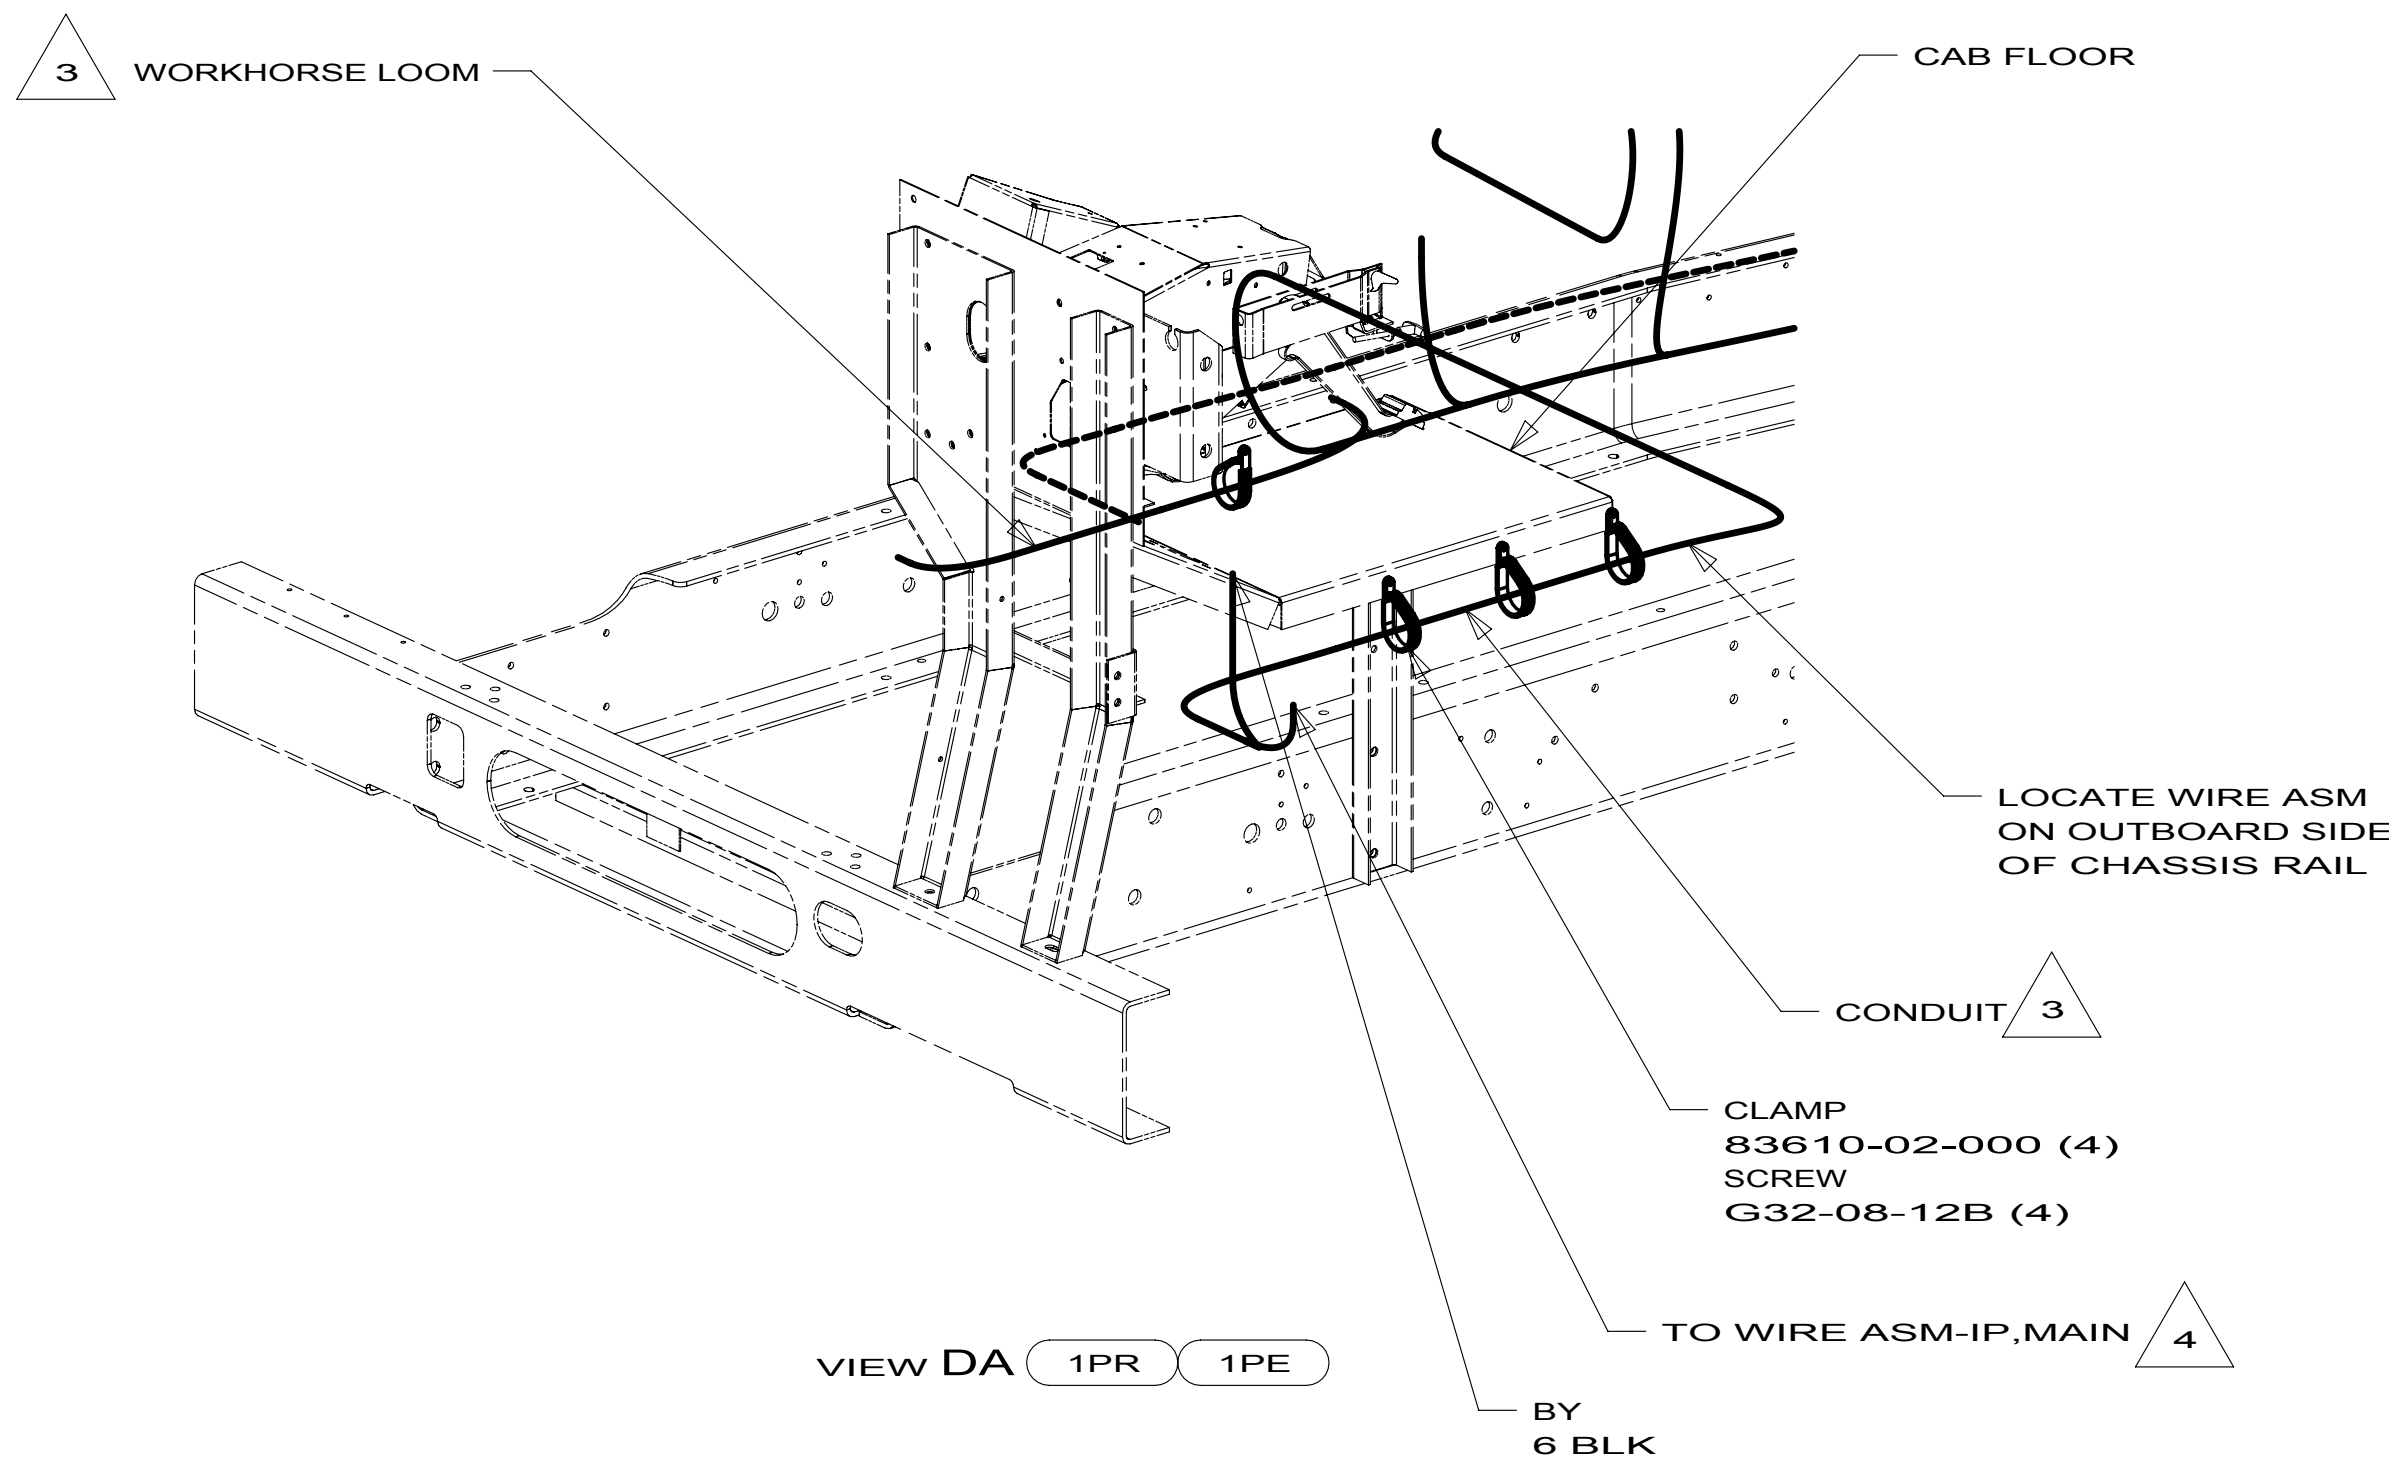

- 8 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 7 SUPPLIED WITH CHASSIS
- 6 CUT CHASSIS SUPPLIED BATTERY GROUND CABLE 700MM FROM BATTERY TERMINAL AND ADD TERMINAL 8348-01-000 TO CUT END.
- 5 CUT CHASSIS SUPPLIED POSITIVE BATTERY CABLE 150MM FROM BATTERY TERMINAL END. DISCARD TERMINAL END AND ADD TERMINAL 113738-01-000 TO CUT END. COIL EXCESS CABLE ALONG FRAME RAIL JUST BEHIND THE RADIATOR AND TIE UP WITH TIE-WIRE 8343-04-000.
- 4 ROUTE WIRE THRU HOLE IN CAB FLOOR.
- 3 COVER WITH CONDUIT 41953-10-000 AND 41953-11-000 AS REQUIRED.

2. CONNECT CABLES TO COACH SIDE OF BATTERY DISCONNECT WHEN BATTERY DISCONNECT IS USED.
1. CUT OFF EXCESS END OF WIRE TIE.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALL-OUTS
SEE DWG NO.
121339-01-000

- 1PE WORKHORSE 20,500 DSL 230HP
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 16K FORD CHASSIS 22,000
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D33C		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-CHASSIS		
SHEET 4	PART NO 171593	REV

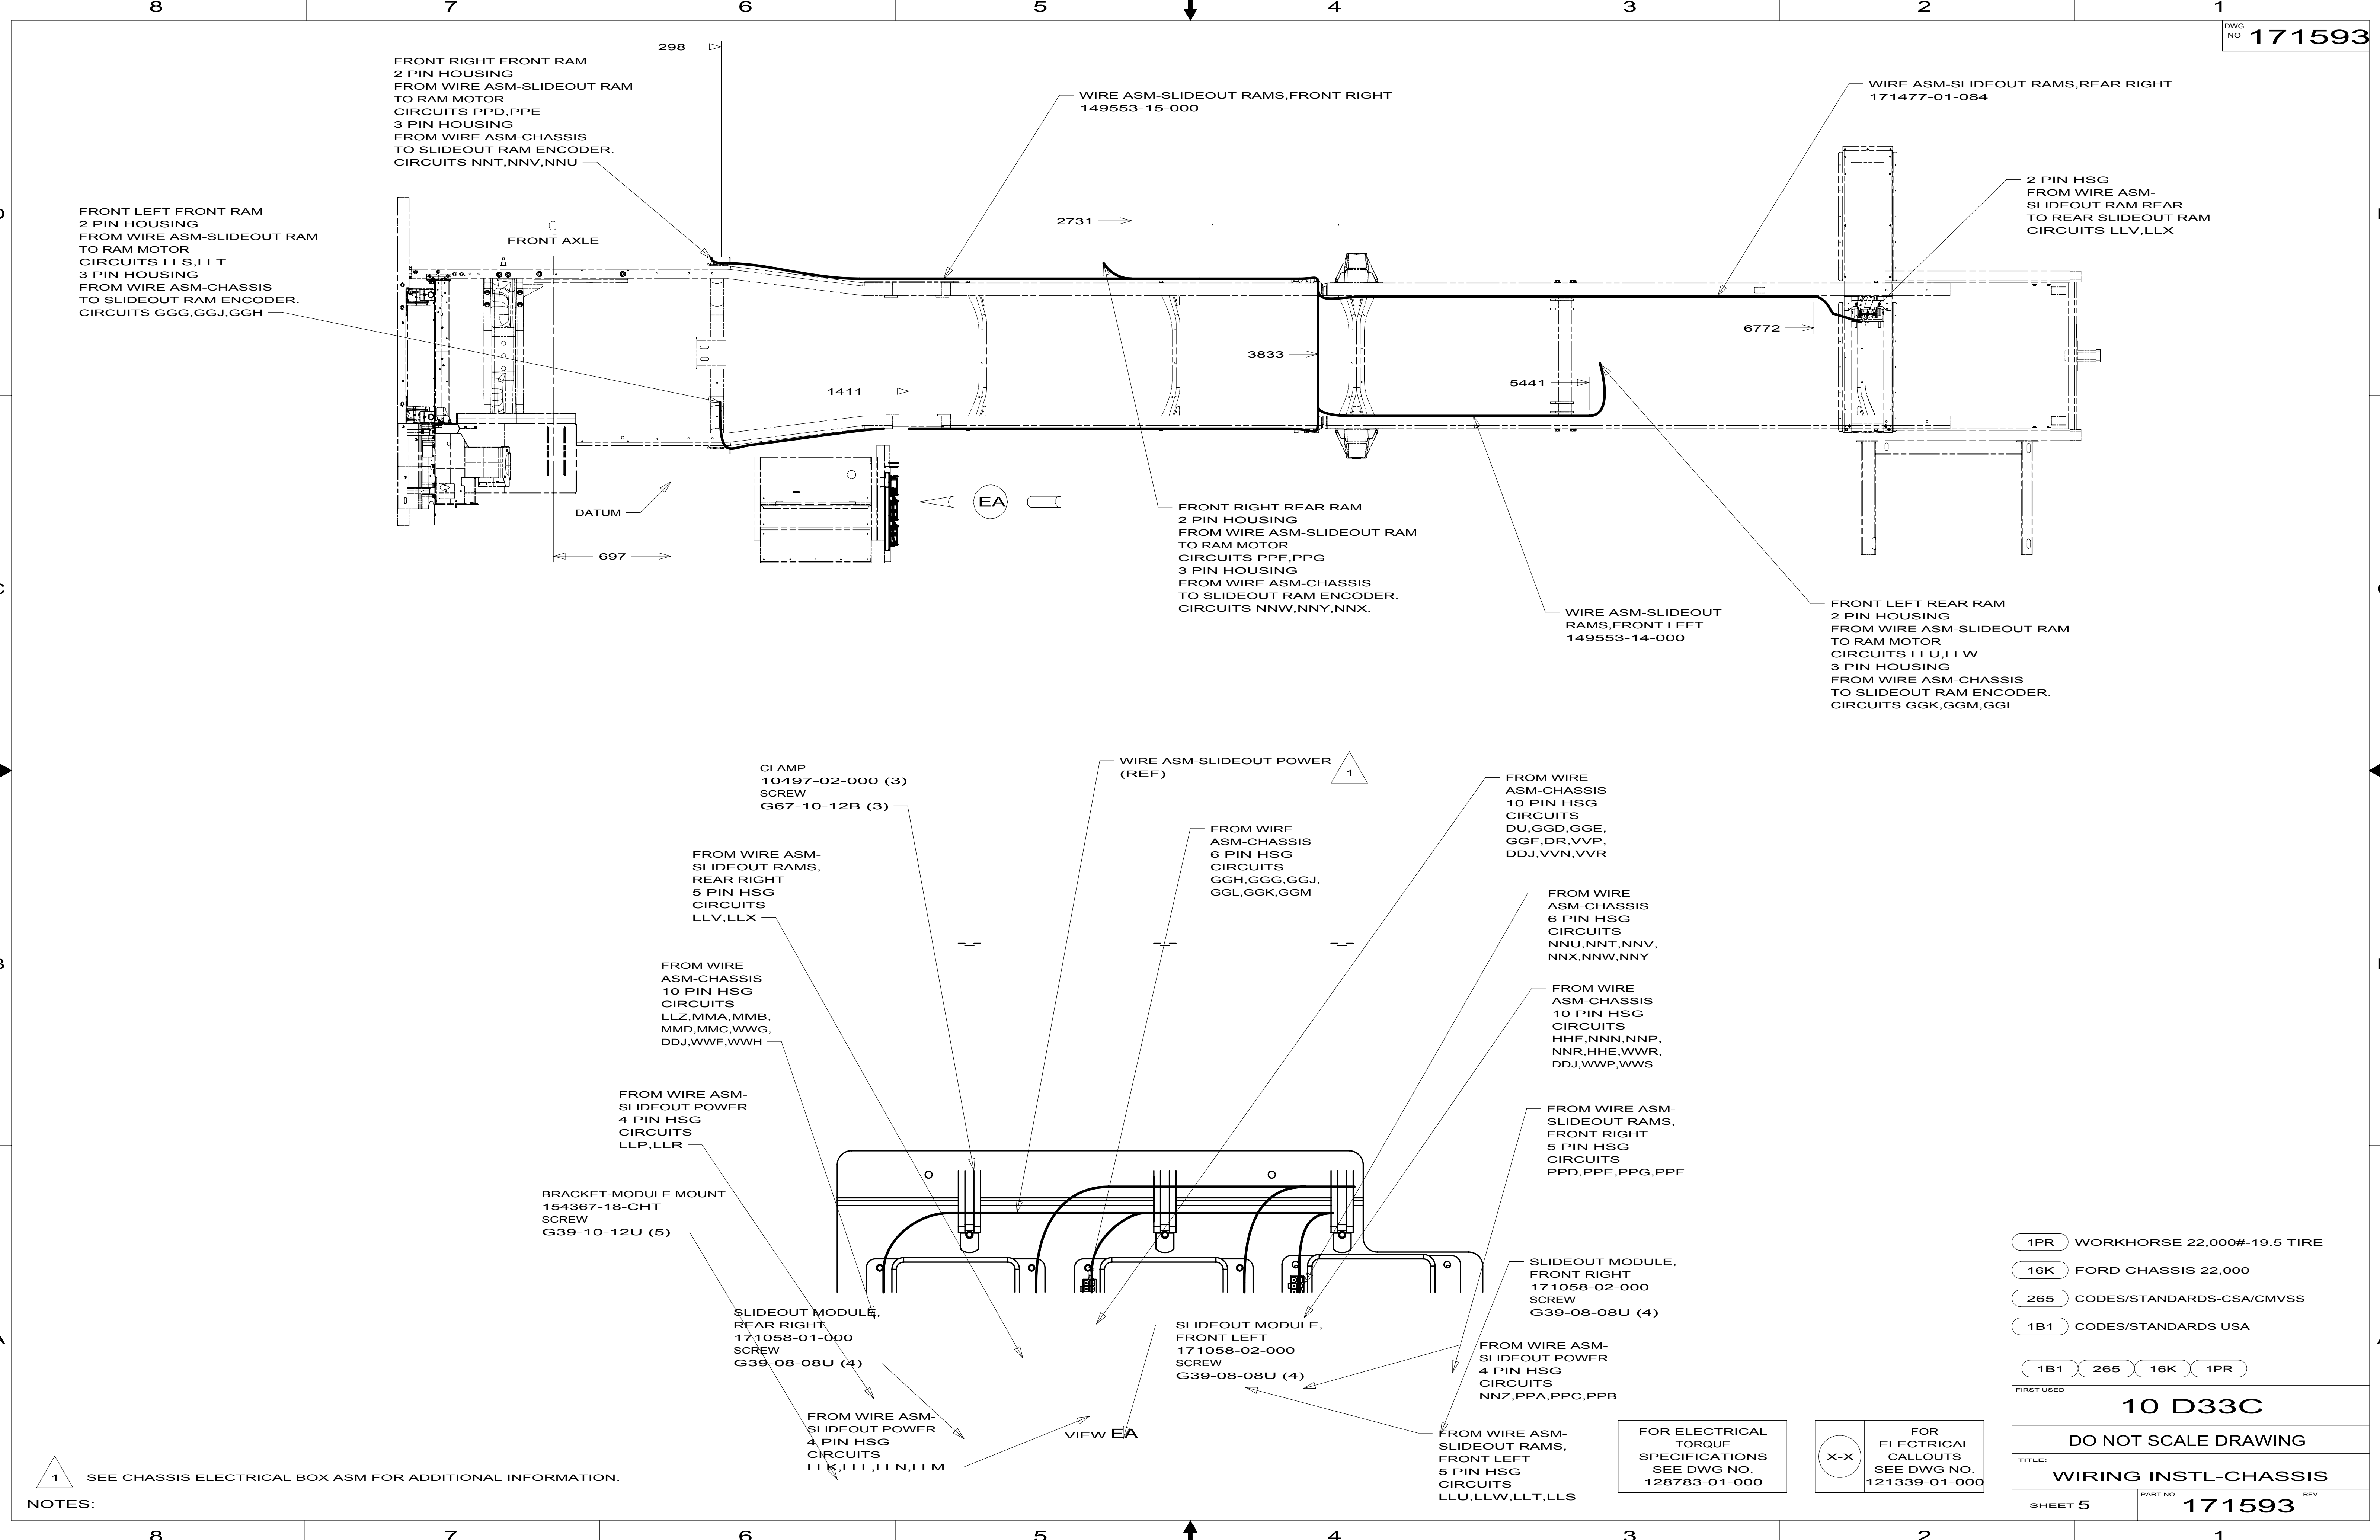

8

7

6

5

4

3

2

1

DRAWING NO.

FEATURES

SHEETS

171129-01

1PS1PR

1,2,4

171129-02

16H16L16K

1,3,4

RELEASE

REV A

DATE

DWG NO

171129

REV

ZONE

REVISION RECORD

DATE

DFTR-ORIG

D

D-SERIES

		D31E	D33C	D35J	D37L
CABLE ASM-CHASSIS GND EXT (BLK)	16K16L	133566-12-019	133566-12-042	133566-12-019	133566-12-034
CABLE ASM-CHASSIS POWER EXT (RED)	16K16L	141415-32-018	141415-32-047	141415-32-017	141415-32-038
CABLE ASM-CHASSIS BATTERY DISCONNECT SUPPLY (RED)	16K16L	141415-32-013	141415-32-055	141415-32-013	141415-32-034
CHASSIS SUPPLIED POSITIVE CABLE CHASSIS BATTERY DISCONNECT SUPPLY (RED)	1PS1PR	1300	141415-38-0533	1300	141415-38-0343
CABLE ASM-STARTER (RED)	1PS1PR	141415-35-024	141415-35-052	141415-35-023	141415-35-042
CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL)	16K1PR16L1PS	141416-52-014	141416-52-051	141416-52-014	141416-52-035
CABLE ASM-COACH BATTERY GND (BLK)	16K1PR16L1PS	133567-12-008	133567-12-008	133567-12-008	133567-12-008
CABLE ASM-CHASSIS BATTERY DISCONNECT RETURN (PUR)	16K1PR16L1PS	141415-12-012	141415-12-053	141415-12-012	141415-12-036
CABLE ASM-GENERATOR (GRN)	16K1PR16L1PS	141415-42-089	141415-42-083	141415-42-095	141415-42-105
LEVELING SYSTEM POWER CABLE (BLU)	60M	141415-22-037	141415-22-065	141415-22-033	141415-22-063
LEVELING SYSTEM GND CABLE (BLK)	60M	133566-11-008	133566-11-008	133566-11-008	133566-11-008
WIRE ASM-INVERTER	40D	-----	-----	-----	154845-01-025

C

→

E-SERIES

		E26P	E30W	E32K
CABLE ASM-CHASSIS GND EXT (BLK)	16H16K16N	133566-12-018	133566-12-032	133566-12-031
CABLE ASM-CHASSIS POWER EXT (RED)	16H16K16N	141415-32-020	141415-32-036	141415-32-033
CABLE ASM-CHASSIS BATTERY DISCONNECT SUPPLY (RED)	16H16K16N	141415-32-015	141415-32-024	141415-32-027
CHASSIS SUPPLIED POSITIVE CABLE CHASSIS BATTERY DISCONNECT SUPPLY (RED)	1PJ1PL1PR	1300	141415-38-0253	141415-38-0273
CABLE ASM-STARTER (RED)	1PJ1PL1PR	141415-35-025	141415-35-042	141415-35-038
CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL)	16H16K16N1PJ1PL1PR	141416-52-014	141416-52-027	141416-52-030
CABLE ASM-COACH BATTERY GND (BLK)	16H16K16N1PJ1PL1PR	133567-12-008	133567-12-008	133567-12-008
CABLE ASM-CHASSIS BATTERY DISCONNECT RETURN (PUR)	16H16K16N1PJ1PL1PR	141415-12-012	141415-12-027	141415-12-026
CABLE ASM-GENERATOR (GRN)	16H16K16N1PJ1PL1PR	141415-42-074	141415-42-075	141415-42-089
CABLE ASM-GENERATOR GND (BLK)	16H16K16N1PJ1PL1PR	133566-12-008	133566-12-008	-----
LEVELING SYSTEM POWER CABLE (BLU)	60M	141415-22-035	141415-22-052	141415-22-049
LEVELING SYSTEM GND CABLE (BLK)	60M	133566-11-008	133566-11-008	133566-11-008

B

3

2

1

SEE DETAIL DA FOR CONNECTORS INFORMATION.

LOCATE CHASSIS SUPPLIED POSITIVE CABLE; REDUCE LENGTH TO DIMENSION IN COLUMN AND ADD TERMINAL 68070-01-000 TO THE CUT END (1800MM CHASSIS SUPPLIED LENGTH)

BATTERY CABLES MUST BE INSTALLED TO STARTER MOTOR BEFORE ENGINE WIRING HARNESS AND ROUTED IN SUCH A MANNER AS TO PREVENT ANY POSSIBLE DEGRADATION FROM THE EXHUAUST SYSTEM.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DO NOT SCALE DRAWING

TITLE:

BATTERY INSTL

SHEET 1 OF 4

PART NO 171129

REV

REF:

1

10/31/2009

D

D

C

C

B

B

A


A

→

←

↑

↓

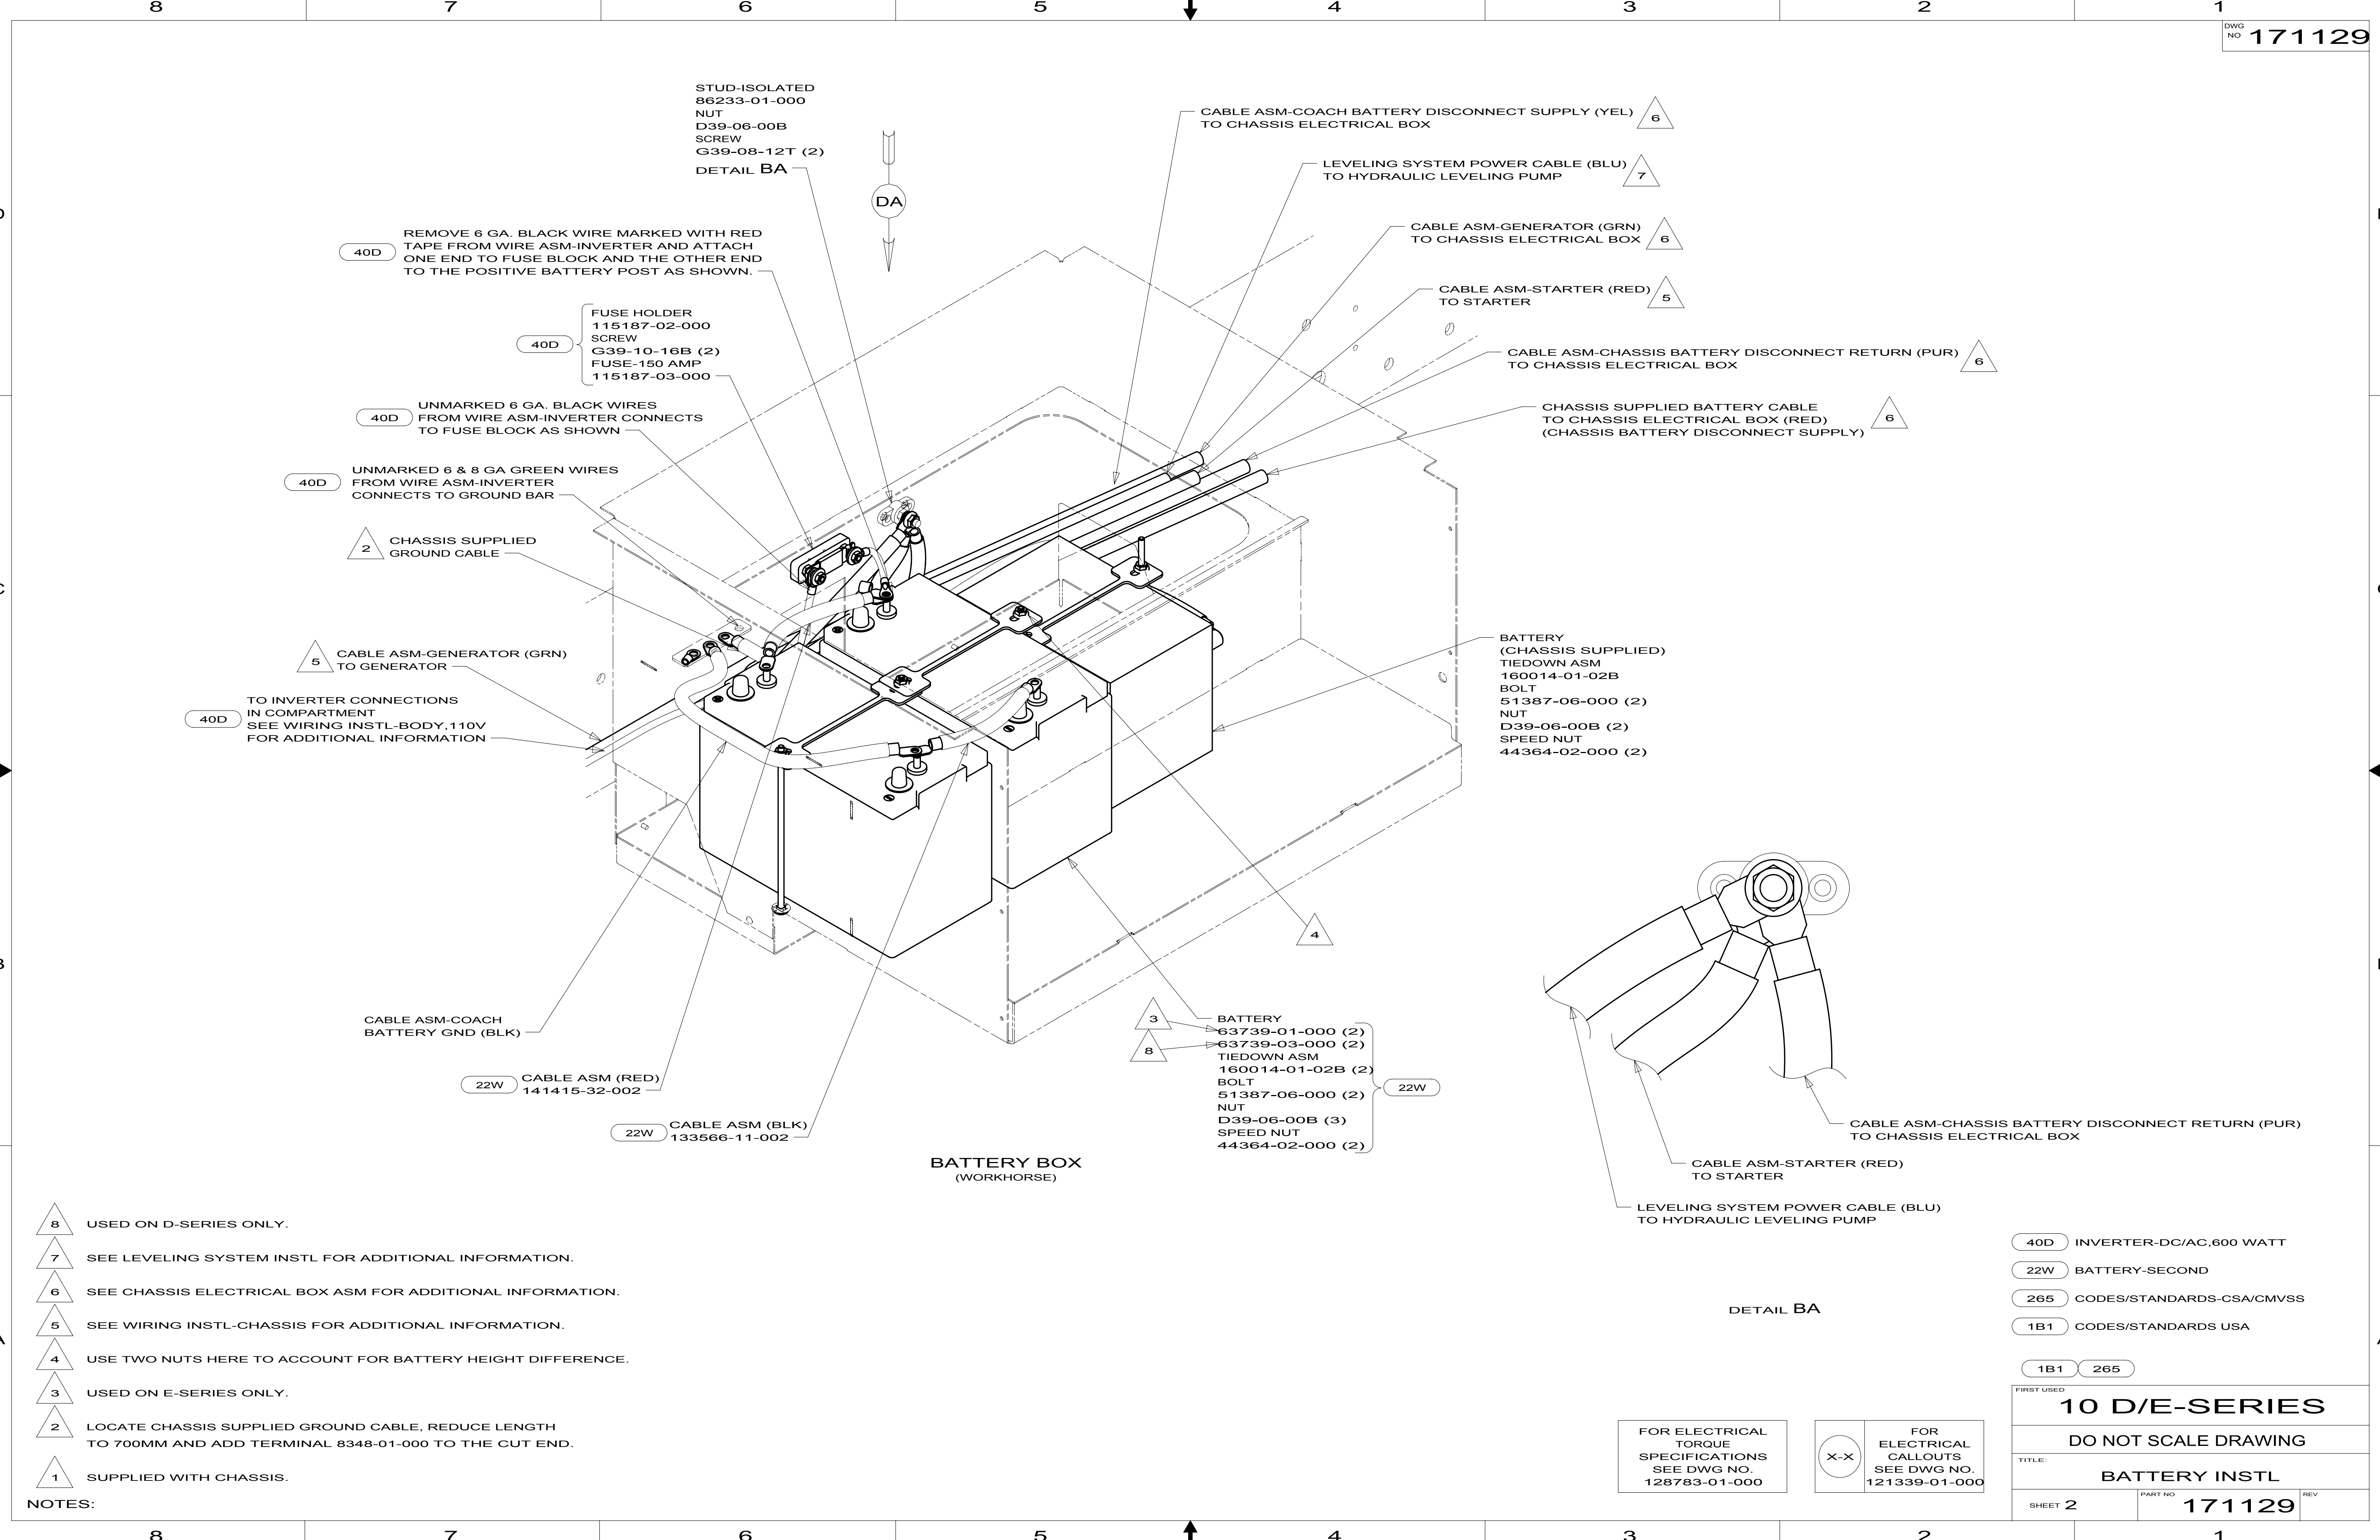

- 8 USED ON D-SERIES ONLY.
- 7 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.
- 6 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 USE TWO NUTS HERE TO ACCOUNT FOR BATTERY HEIGHT DIFFERENCE.
- 3 USED ON E-SERIES ONLY.
- 2 LOCATE CHASSIS SUPPLIED GROUND CABLE, REDUCE LENGTH TO 700MM AND ADD TERMINAL 8348-01-000 TO THE CUT END.
- 1 SUPPLIED WITH CHASSIS.

NOTES:

DETAIL BA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 40D INVERTER-DC/AC,600 WATT
- 22W BATTERY-SECOND
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D/E-SERIES		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 2	PART NO 171129	REV

D

C

B

A

D

C

B

A



8

7

6


5

4

3

2

1

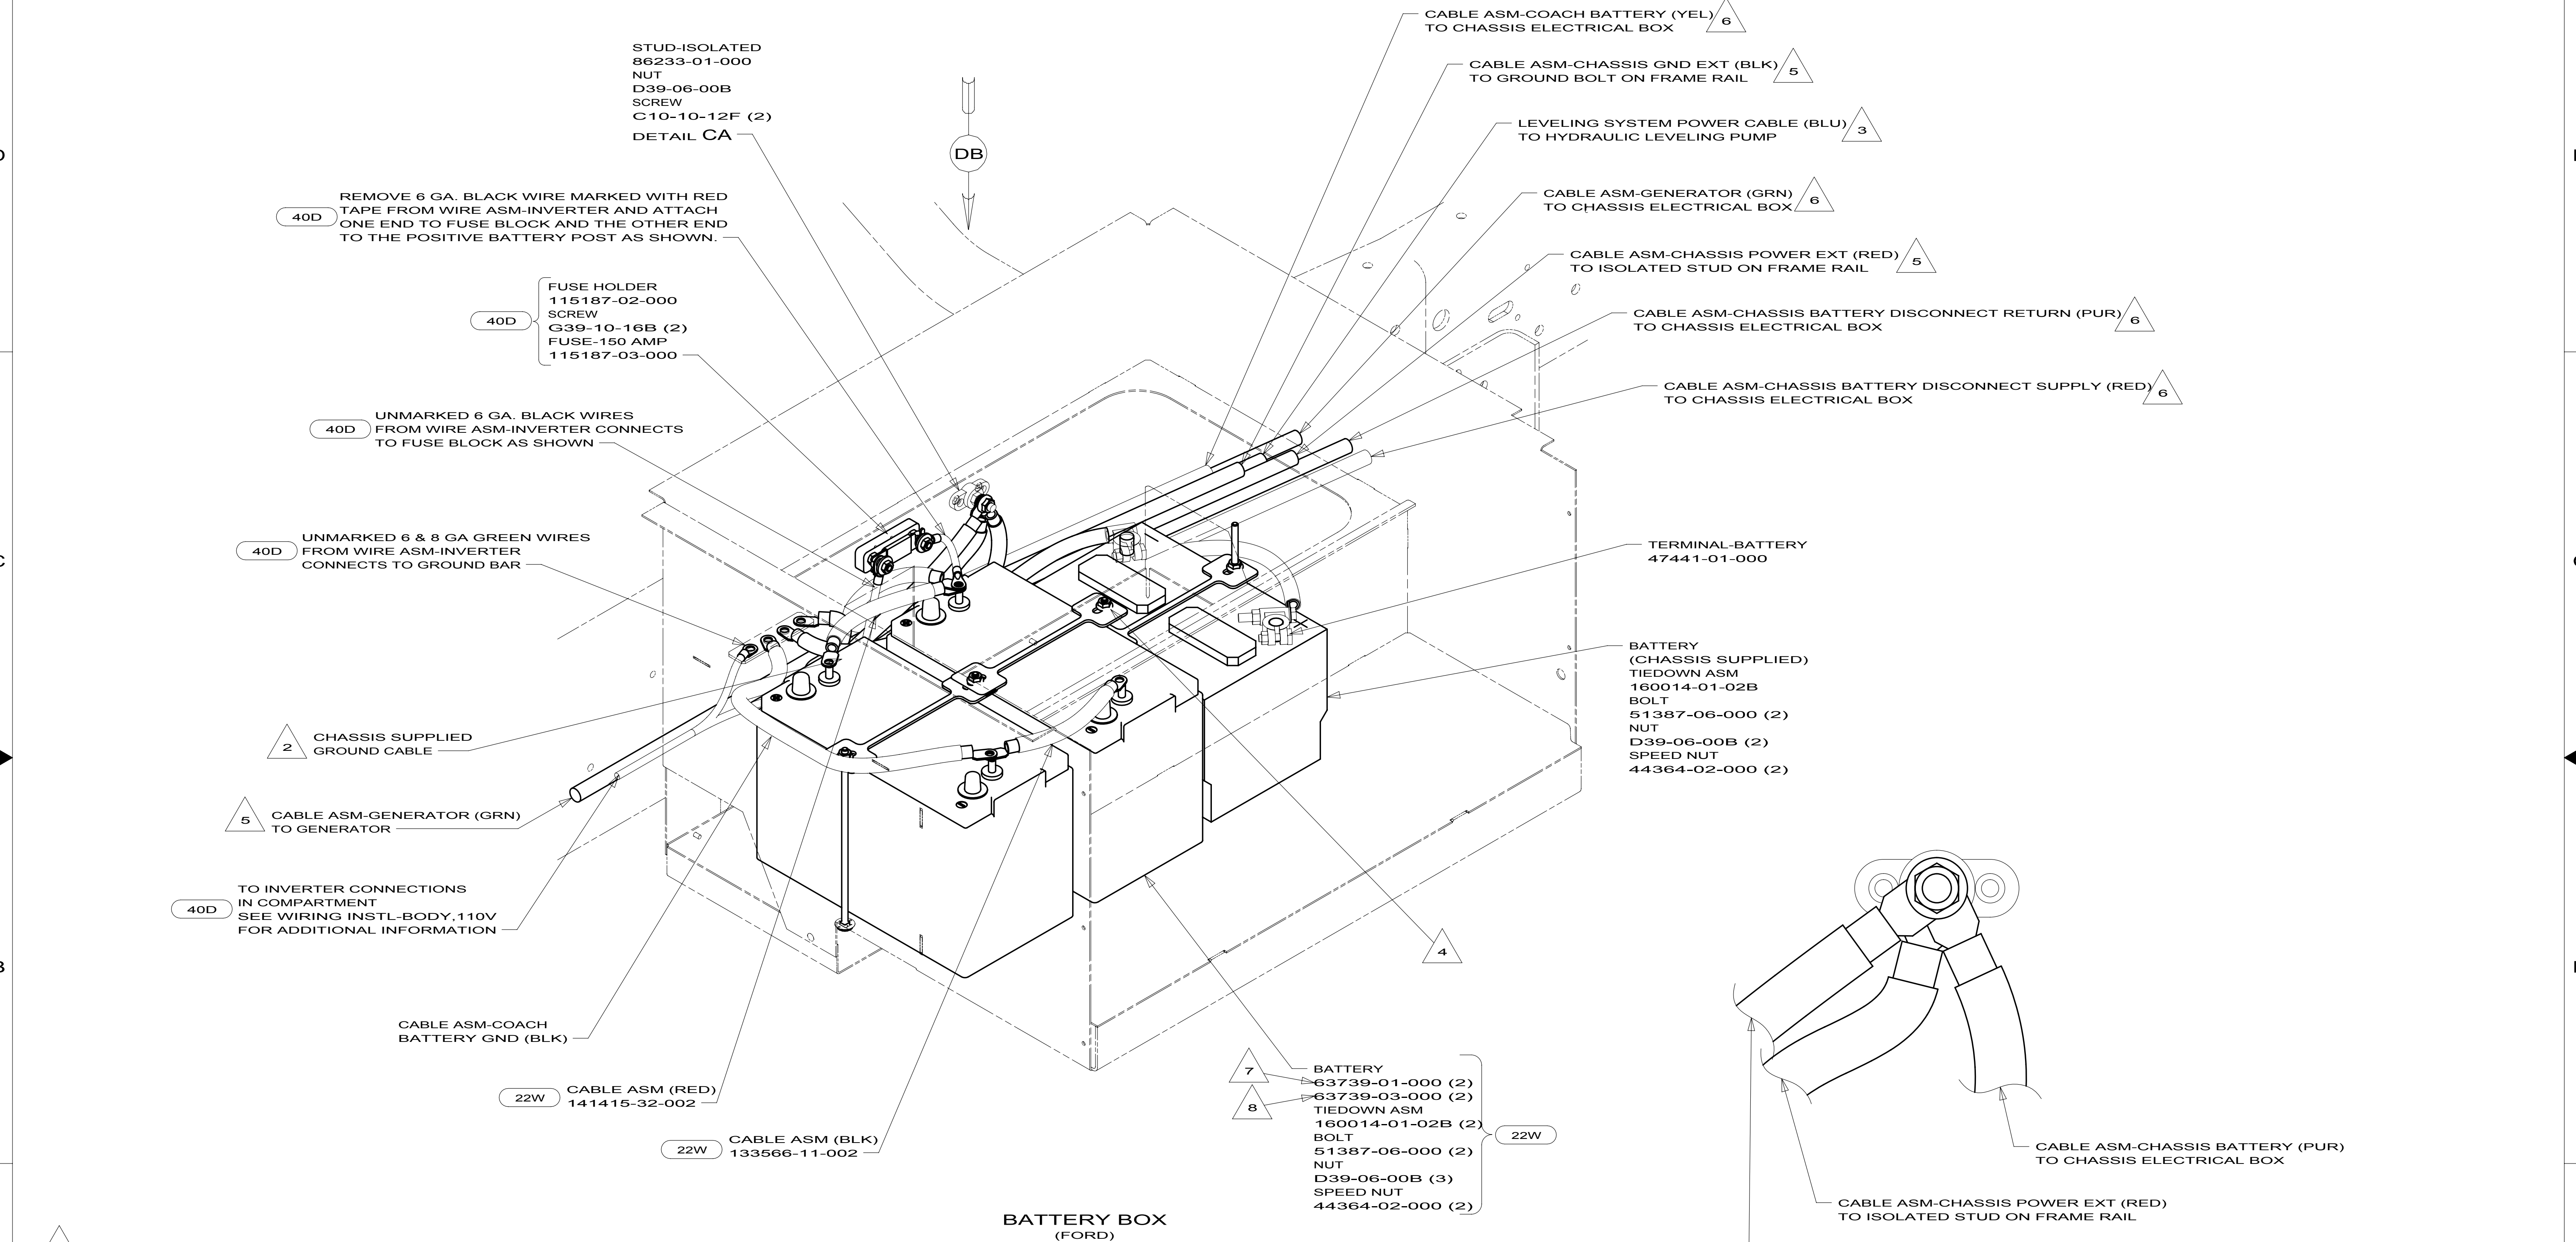

- 8 USED ON D-SERIES ONLY.
- 7 USED ON E-SERIES ONLY.
- 6 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 USE TWO NUTS HERE TO ACCOUNT FOR BATTERY HEIGHT DIFFERENCE.
- 3 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.
- 2 LOCATE CHASSIS SUPPLIED GROUND CABLE, REDUCE LENGTH TO 700MM AND ADD TERMINAL 8348-01-000 TO THE CUT END.
- 1 SUPPLIED WITH CHASSIS.

NOTES:


DETAIL CA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 40D INVERTER-DC/AC,600 WATT
- 22W BATTERY-SECOND
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D/E-SERIES		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 3	PART NO 171129	REV

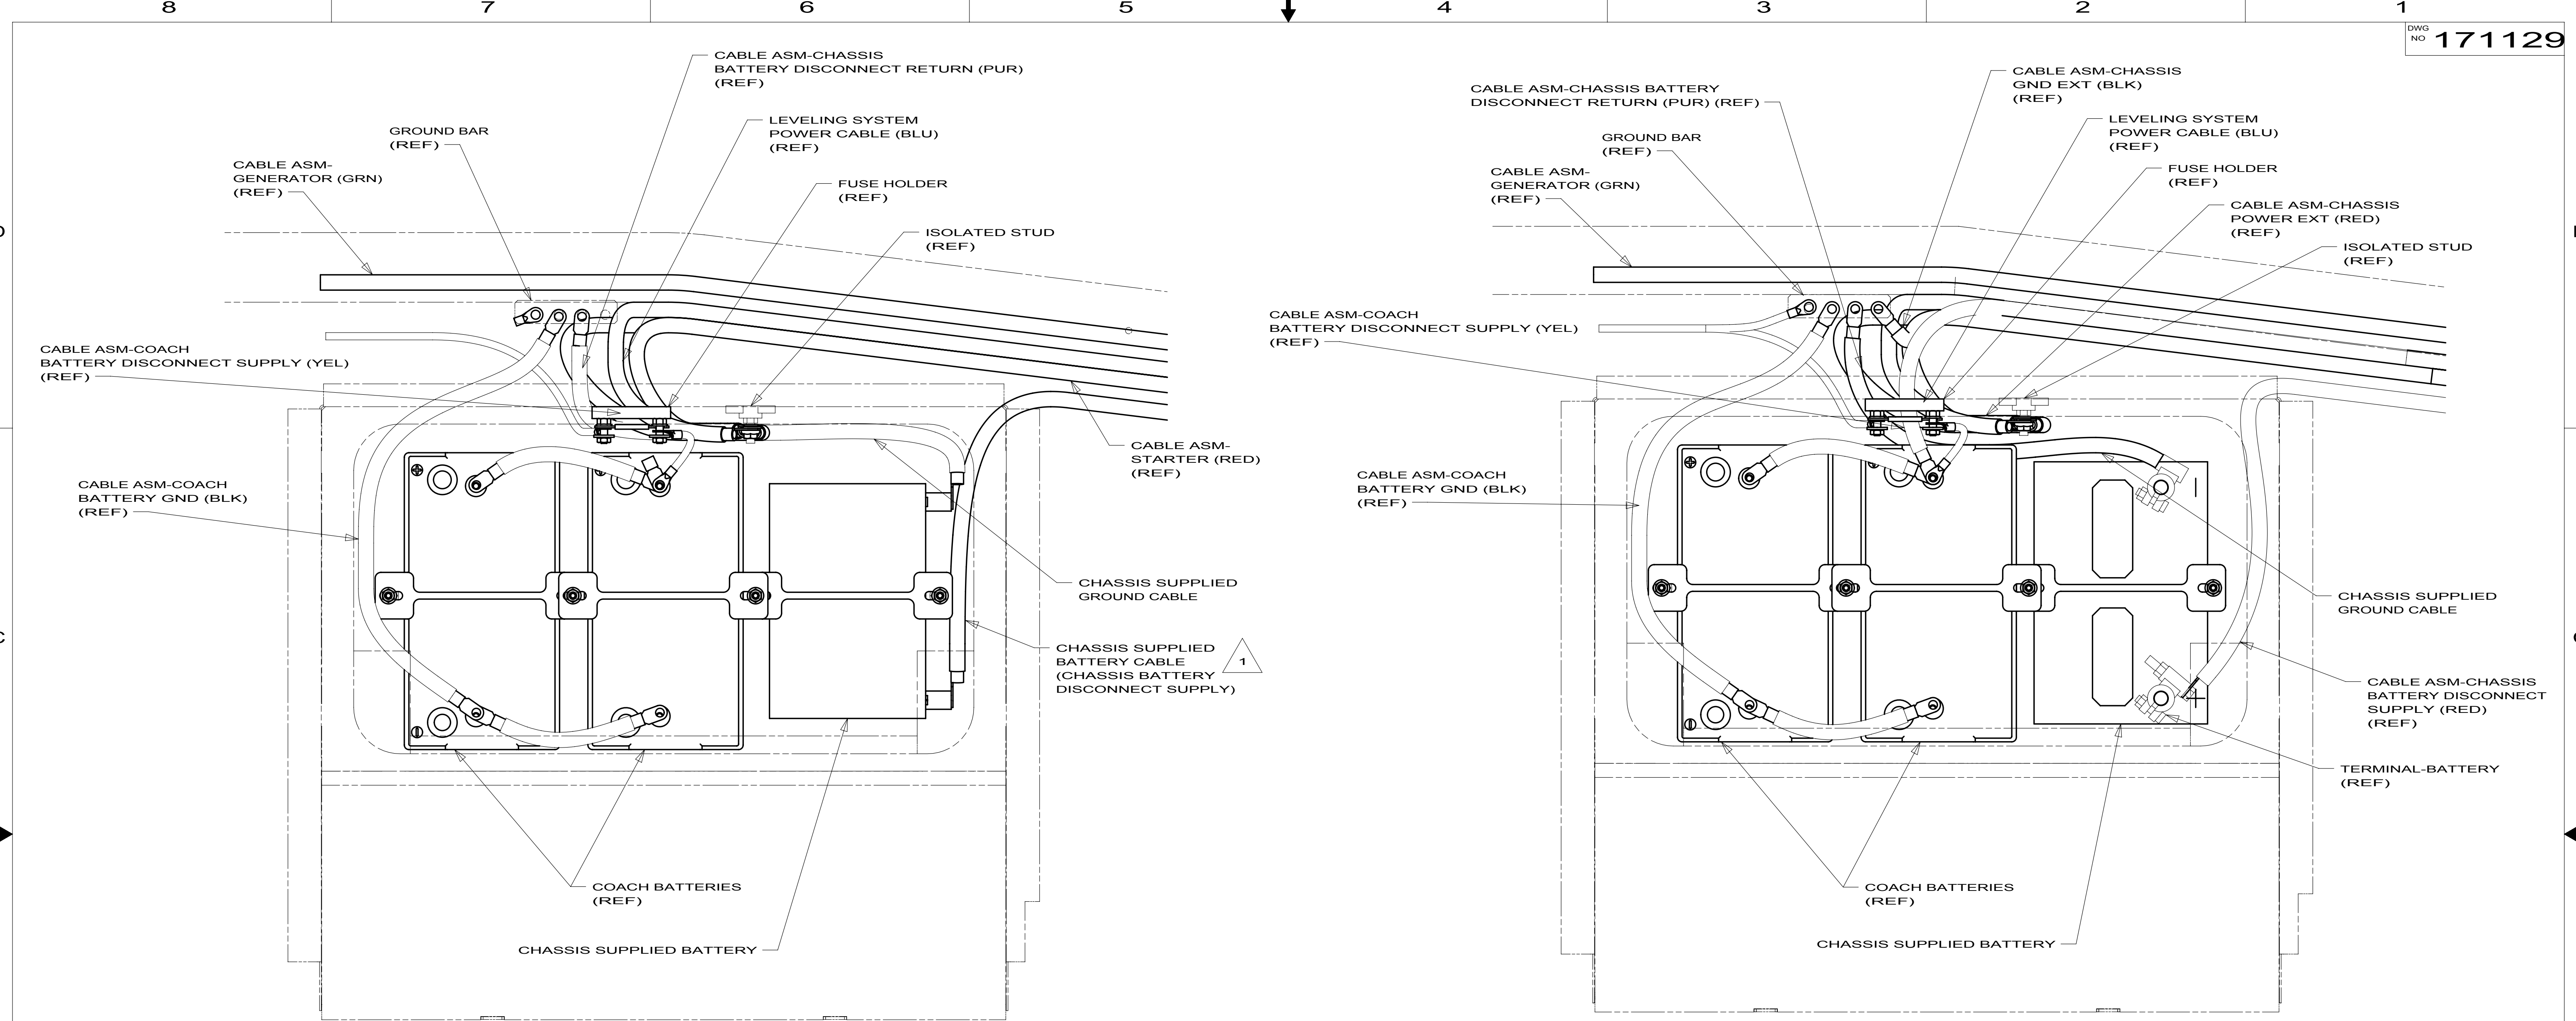

VIEW DA
(WORKHORSE)

VIEW DB
(FORD)

1 ON D29R & D37L ONLY, DISCONNECT CHASSIS SUPPLIED CABLE AND REPLACE WITH CABLE ASM ON SHT 1. SECURE RING TERMINAL TO BATTERY USING SIDEPOST BOLT 166472-02-000.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

10 D/E-SERIES

DO NOT SCALE DRAWING

TITLE:


BATTERY INSTL

SHEET 4

PART NO

171129

REV


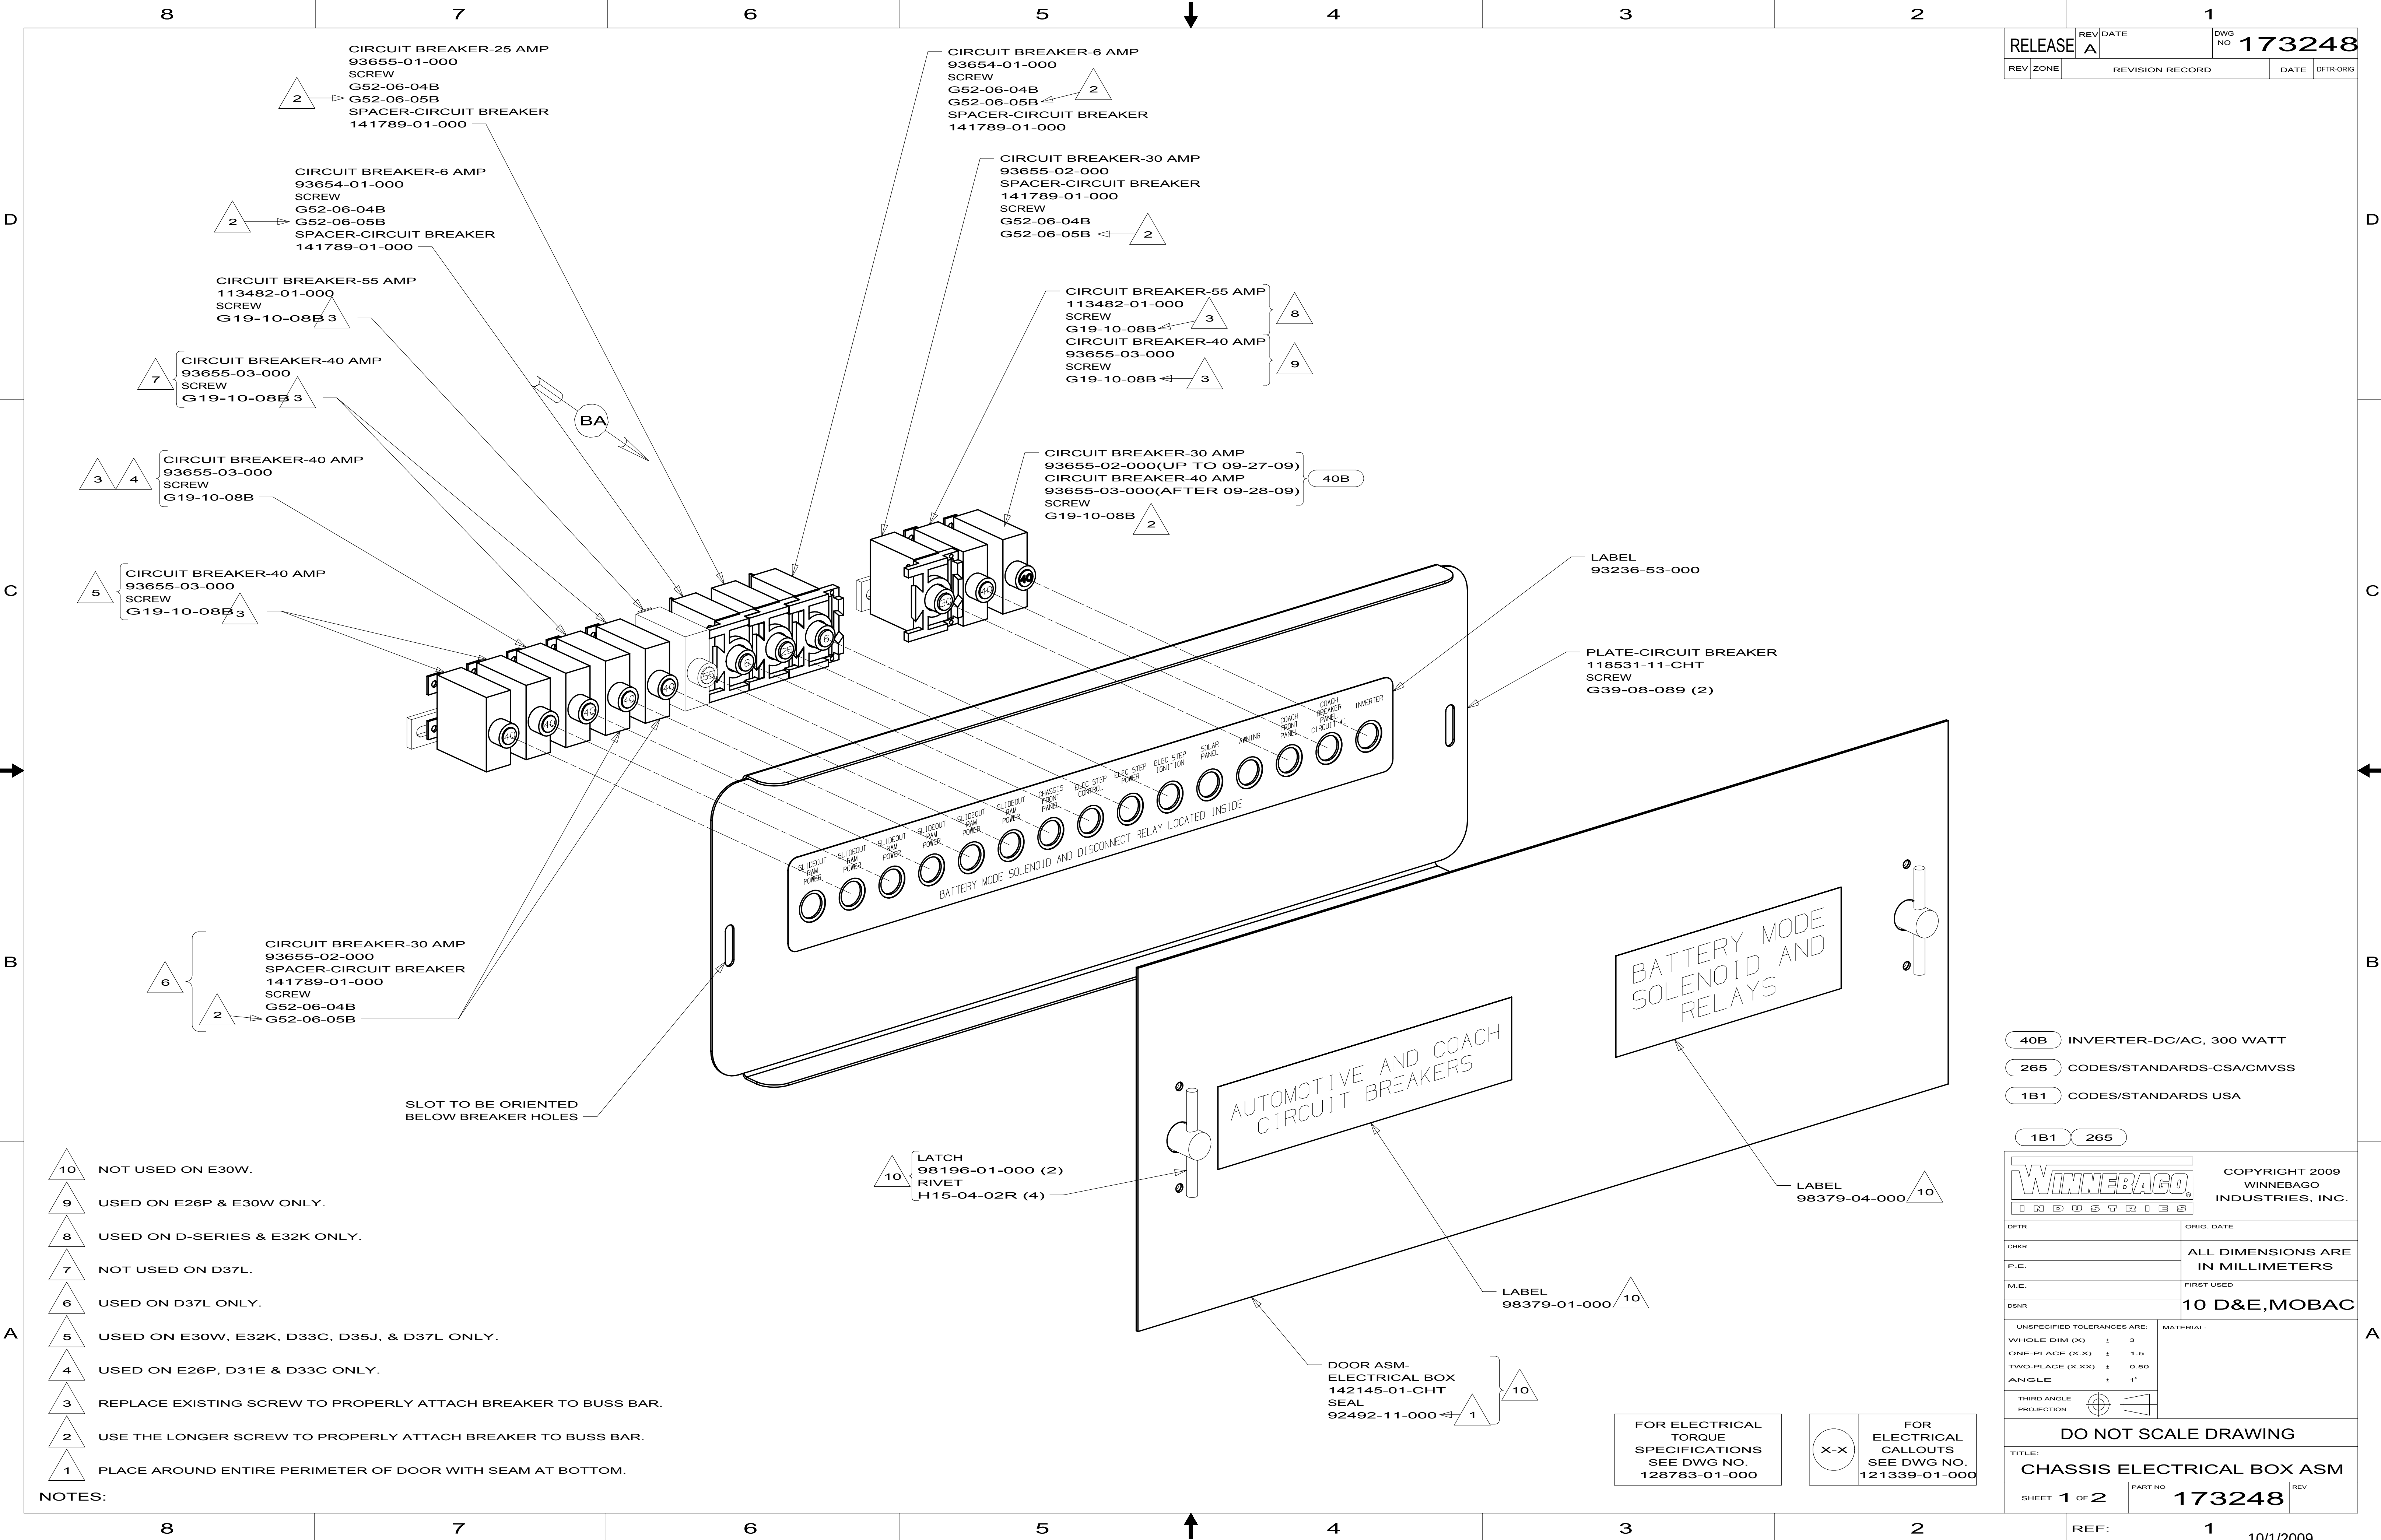


RELEASE		REV	DATE	DWG NO	173248
REV	ZONE	REVISION RECORD		DATE	DFT-ORIG

- 40B INVERTER-DC/AC, 300 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT-OR	ORIG. DATE
CHGR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	FIRST USED
M.E.	10 D&E,MOBAC
DSNR	
UNSPECIFIED TOLERANCES ARE:	MATERIAL:
WHOLE DIM (X) ± 3	
ONE-PLACE (X.X) ± 1.5	
TWO-PLACE (X.XX) ± 0.50	
ANGLE ± 1°	
THIRD ANGLE PROJECTION	

DO NOT SCALE DRAWING	
TITLE: CHASSIS ELECTRICAL BOX ASM	
SHEET 1 OF 2	PART NO 173248

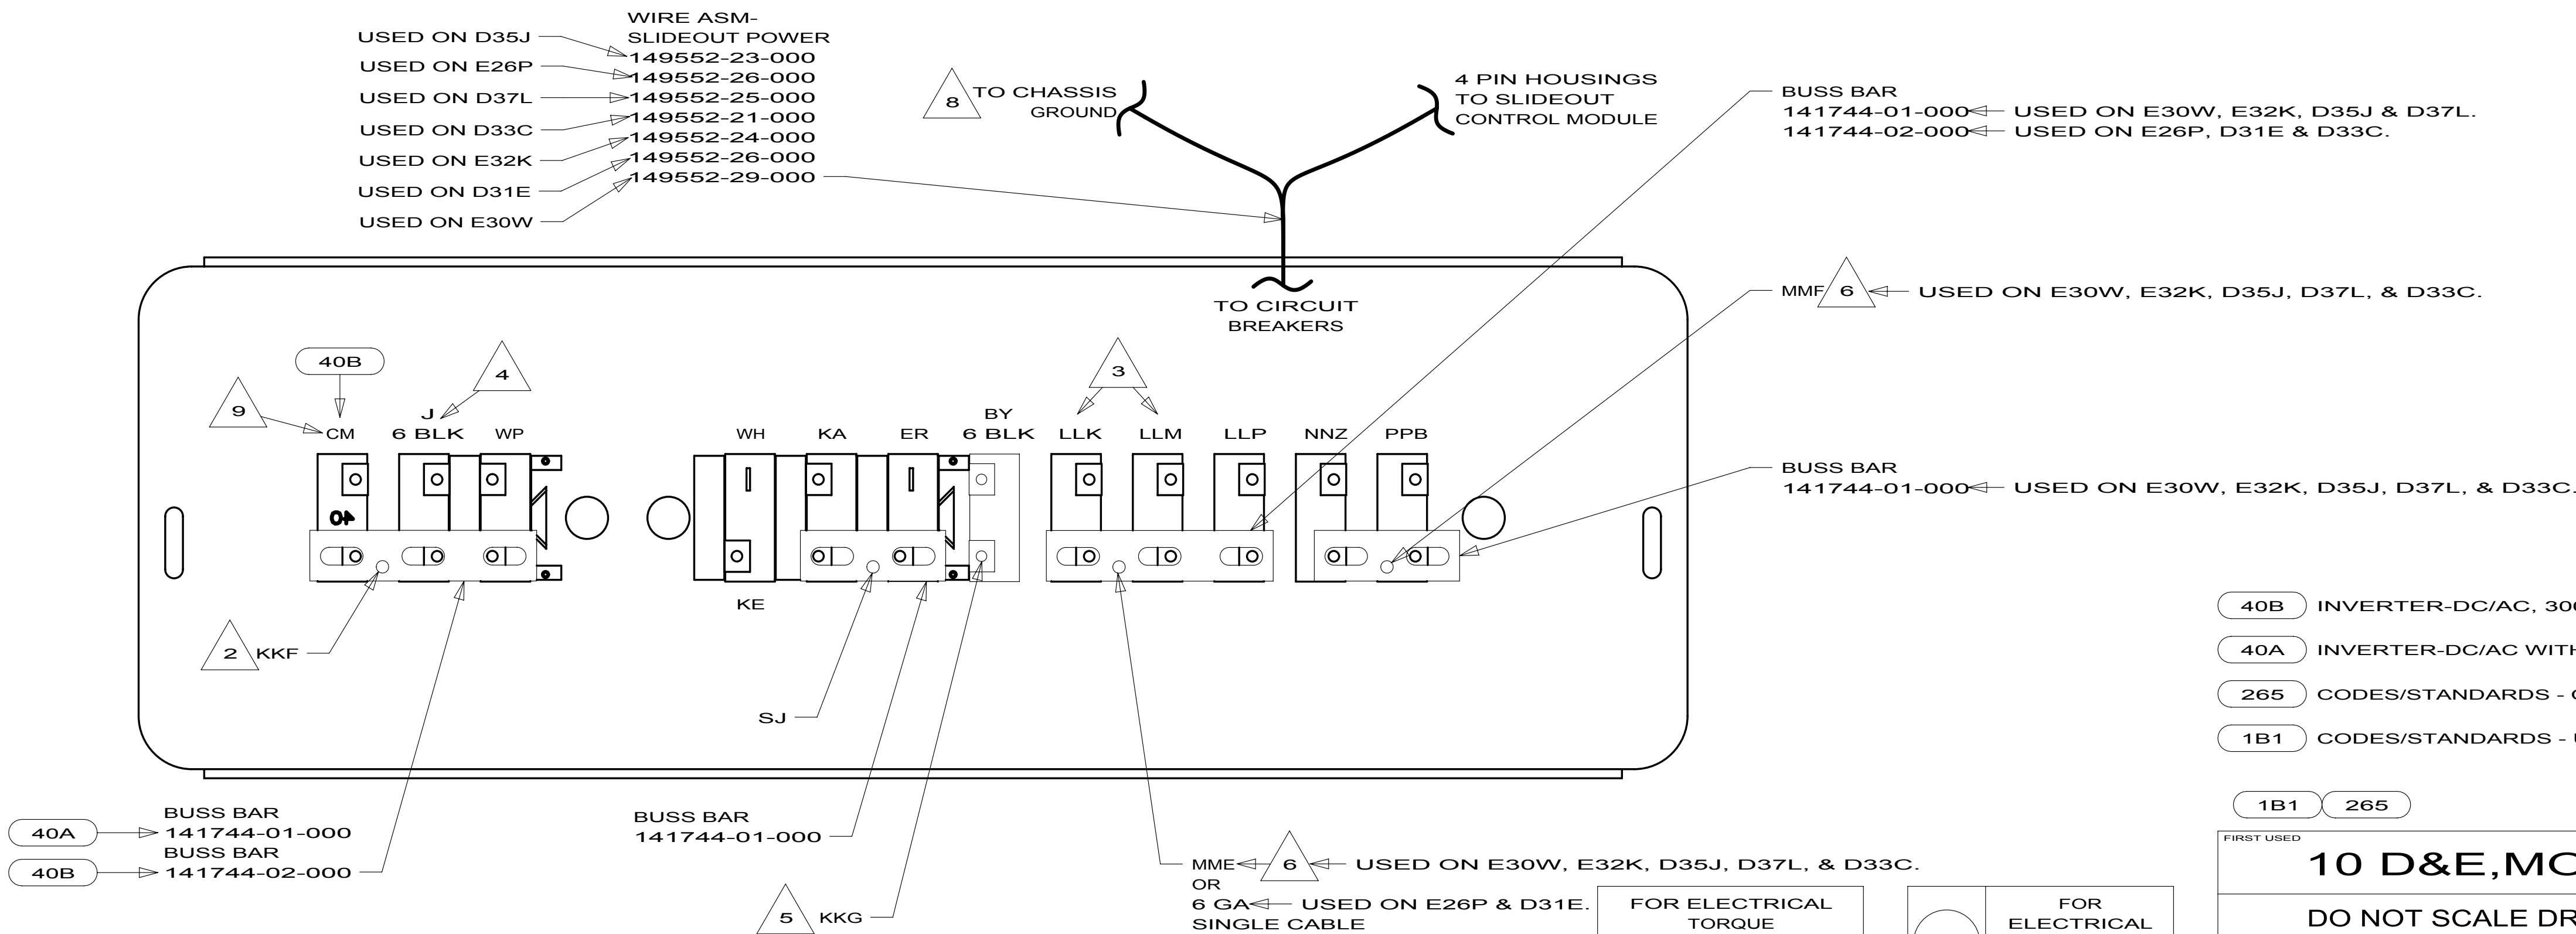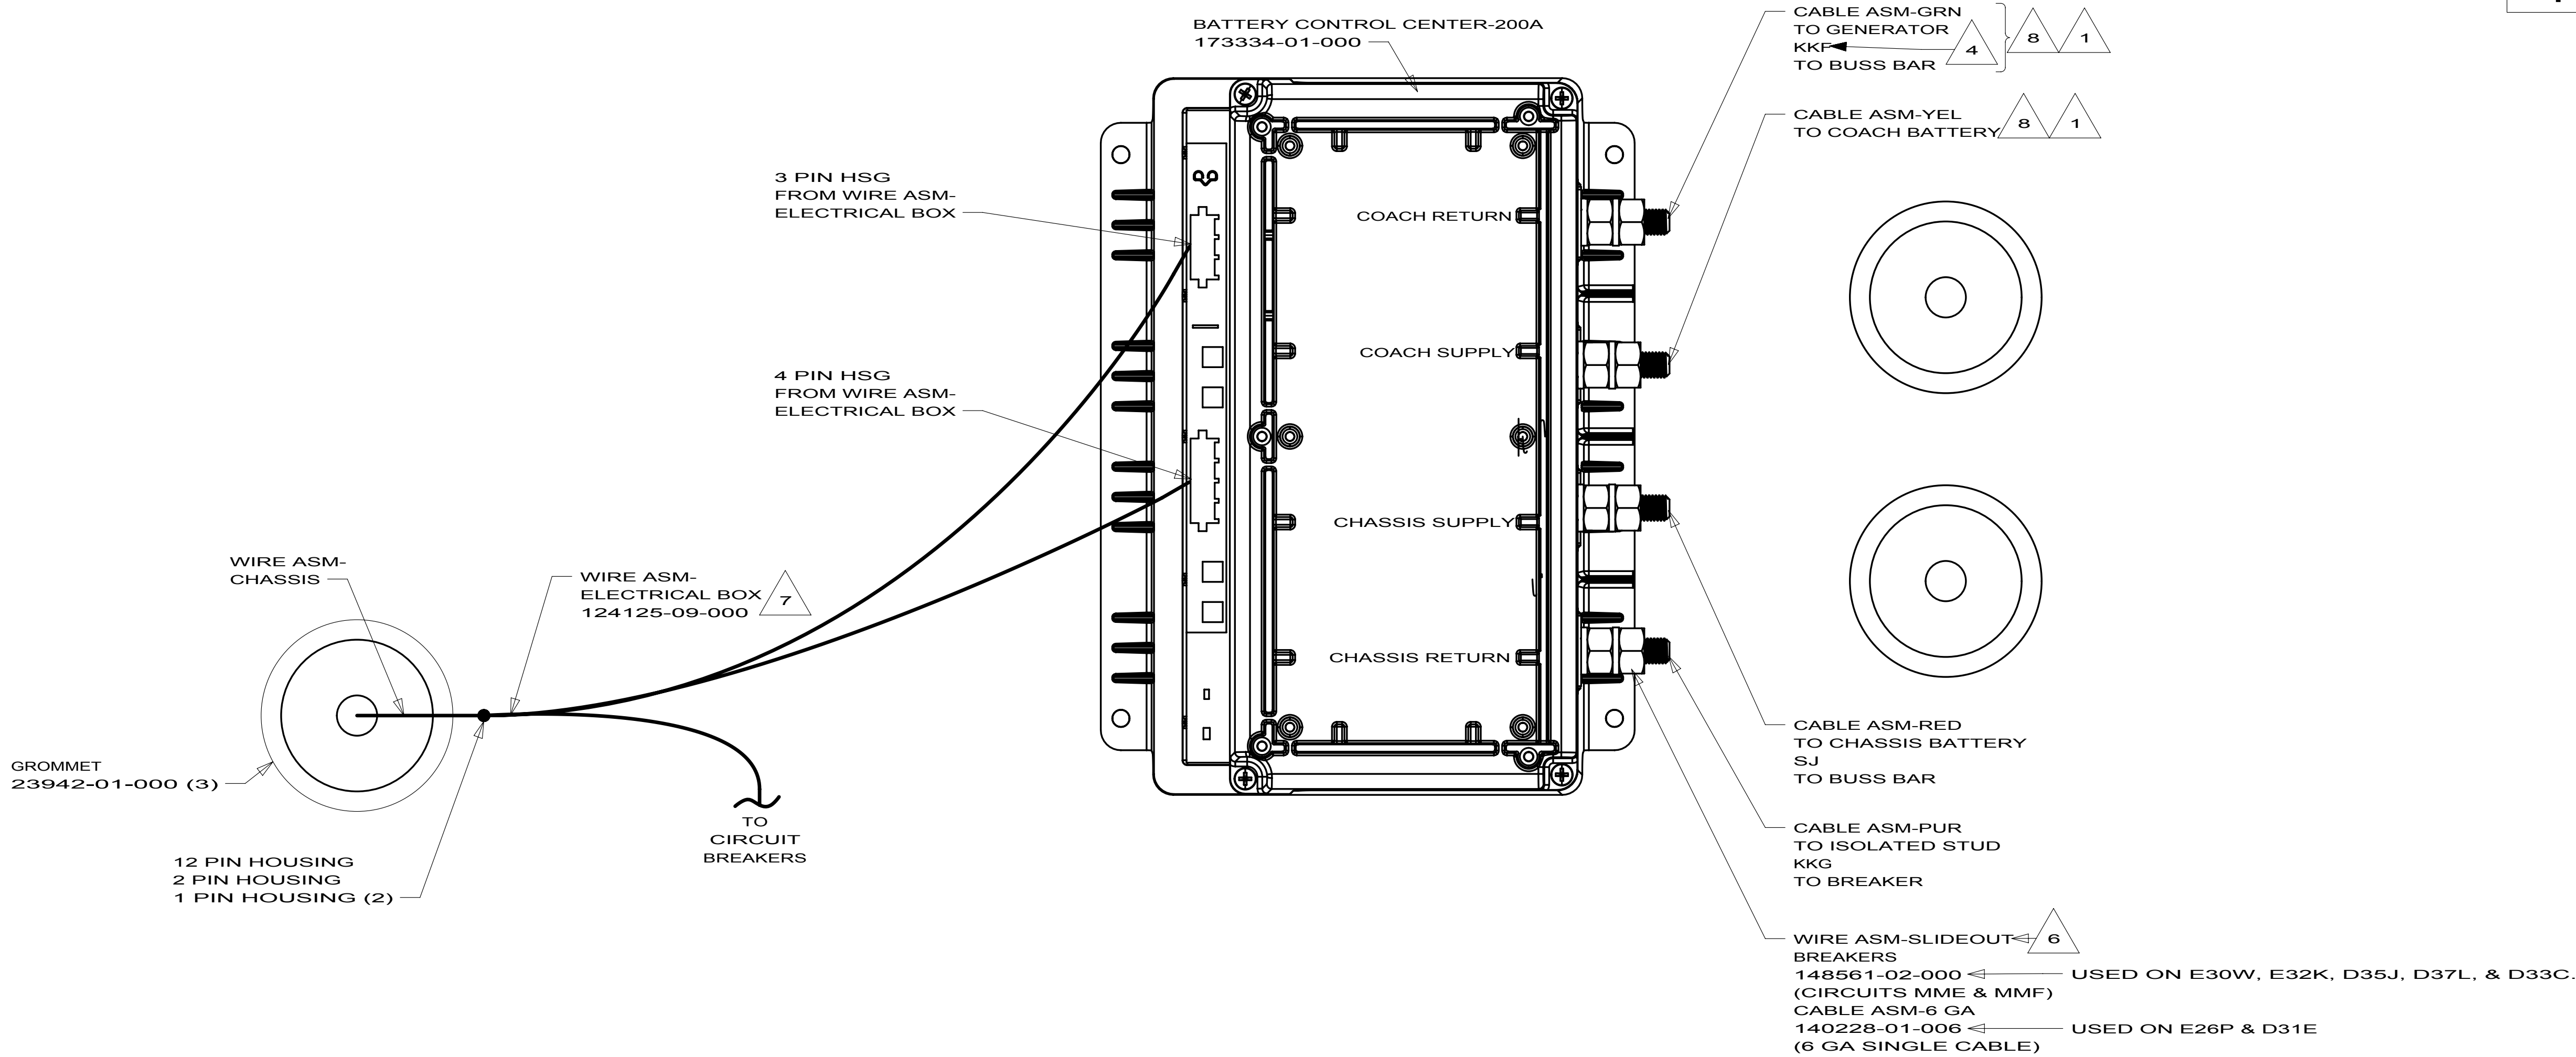

- 9 FROM WIRE ASM-CHASSIS.
- 8 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL IFORMATION.
- 7 IF CIRCUIT NOT USED, TAPE BACK TO HARNESS.
- 6 WIRE MARKED WITH RED TAPE.
- 5 WIRE MARKED WITH PURPLE TAPE.
- 4 WIRE MARKED WITH YELLOW TAPE.
- 3 FROM WIRE ASM-CHASSIS ON D37L.
- 2 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.
- 1 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

NOTES:

FIRST USED		
10 D&E,MOBAC		
DO NOT SCALE DRAWING		
TITLE:		
CHASSIS ELECTRICAL BOX ASM		
SHEET 2	PART NO	REV
	173248	

87654321

RELEASE

REV

DATE

DWG NO

173691

REV

ZONE

REVISION RECORD

DATE

DFTR-ORIG

1

2

3

4

5

6

7

8

D

D-SERIES

		D31E	D33C	D35J	D37L
CHASSIS BATTERY NEGATIVE JUMPER		-----	-----	-----	133568-11-008
CHASSIS BATTERY POSITIVE JUMPER		-----	-----	-----	133568-01-008
CHASSIS SUPPLIED GROUND CABLE		800	1800	800	1000
CHASSIS SUPPLIED POSITIVE CABLE CHASSIS BATTERY DISCONNECT SUPPLY (RED)		141417-32-026 ³	141417-32-063 ³	141417-32-026 ³	1700 ²
CABLE ASM-STARTER (RED)		141417-36-038	141417-36-066	141417-36-036	141417-36-059
CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL)		141416-52-014	141416-52-051	141416-52-014	141416-52-039
CABLE ASM-COACH BATTERY GND (BLK)		133567-12-008	133567-12-008	133567-12-008	133567-12-008
CABLE ASM-CHASSIS BATTERY DISCONNECT RETURN (PUR)		141417-12-012	141417-12-053	141417-12-012	141417-12-040
CABLE ASM-GENERATOR (GRN)		141415-42-092	141415-42-081	141415-42-098	141415-42-109
LEVELING SYSTEM POWER CABLE (BLU)	60M	141415-22-037	141415-22-068	141415-22-033	141415-22-067
LEVELING SYSTEM GND CABLE (BLK)	60M	133566-11-008	-----	133566-11-008	133566-11-008
WIRE ASM-INVERTER	40D	-----	-----	-----	154845-01-025

C

→

E-SERIES

		E30W	E32K
CHASSIS BATTERY NEGATIVE JUMPER		133568-11-008	----
CHASSIS BATTERY POSITIVE JUMPER		133568-01-008	----
CHASSIS SUPPLIED GROUND CABLE		800	1300
CHASSIS SUPPLIED POSITIVE CABLE CHASSIS BATTERY DISCONNECT SUPPLY (RED)		1900	1700
CABLE ASM-STARTER (RED)		141417-36-046	141417-36-055
CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL)		141416-52-041	141416-52-034
CABLE ASM-COACH BATTERY GND (BLK)		133567-12-008	133567-12-008
CABLE ASM-CHASSIS BATTERY DISCONNECT RETURN (PUR)		141417-12-041	141417-12-030
CABLE ASM-GENERATOR (GRN)		141415-42-089	141415-42-093
CABLE ASM-GENERATOR GND (BLK)		133566-12-008	-----
LEVELING SYSTEM POWER CABLE (BLU)	60M	141415-22-056	141415-22-053
LEVELING SYSTEM GND CABLE (BLK)	60M	133566-11-008	133566-11-008

B

4

LOCATE CHASSIS SUPPLIED GROUND CABLE; REDUCE LENGTH TO DIMENSION IN COLUMN AND ADD TERMINAL 113738-01-000 TO THE CUT END (1800MM CHASSIS SUPPLIED LENGTH).

3

SEE DETAIL **DA** FOR CONNECTORS INFORMATION.

2

LOCATE CHASSIS SUPPLIED POSITIVE CABLE; REDUCE LENGTH TO DIMENSION IN COLUMN AND ADD TERMINAL 113738-01-000 TO THE CUT END (2500MM CHASSIS SUPPLIED LENGTH)

1

BATTERY CABLES MUST BE INSTALLED TO STARTER MOTOR BEFORE ENGINE WIRING HARNESS AND ROUTED IN SUCH A MANNER AS TO PREVENT ANY POSSIBLE DEGRADATION FROM THE EXHUAST SYSTEM.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1B1

265

WINNEBAGO INDUSTRIES

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.

DFTR

ORIG. DATE

CHGR

ALL DIMENSIONS ARE IN MILLIMETERS

P.E.

FIRST USED

M.E.

10 D/E-SERIES

DSNR

UNSPECIFIED TOLERANCES ARE:
WHOLE DIM (X) ± 3
ONE-PLACE (X.X) ± 1.5
TWO-PLACE (X.XX) ± 0.50
ANGLE ± 1°

MATERIAL:

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

TITLE:
BATTERY INSTL,WH DIESEL

SHEET**1** OF **4**

PART NO
173691

REV

REF:
1

D

C

B

A

D

C

B

A

8

7

6

5

4

3

2

1

→

←

↑

STUD-ISOLATED
86233-01-000
NUT
D39-06-00B
SCREW
G39-08-12T (2)
DETAIL BA

DA

REMOVE 6 GA. BLACK WIRE MARKED WITH RED
TAPE FROM WIRE ASM-INVERTER AND ATTACH
ONE END TO FUSE BLOCK AND THE OTHER END
TO THE POSITIVE BATTERY POST AS SHOWN.

FUSE HOLDER
115187-02-000
SCREW
G39-10-16B (2)
FUSE-50 AMP
115187-03-000

UNMARKED 6 GA. BLACK WIRES
FROM WIRE ASM-INVERTER CONNECTS
TO FUSE BLOCK AS SHOWN

CABLE ASM (RED)
141415-32-002

UNMARKED 6 & 8 GA GREEN WIRES
FROM WIRE ASM-INVERTER
CONNECTS TO GROUND BAR

CABLE ASM (BLK)
133566-11-002

CABLE ASM-GENERATOR (GRN)
TO GENERATOR

TO INVERTER CONNECTIONS
IN COMPARTMENT
SEE WIRING INSTL-BODY, 110V
FOR ADDITIONAL INFORMATION

CABLE ASM-COACH
BATTERY GND (BLK)

CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL)
TO CHASSIS ELECTRICAL BOX

LEVELING SYSTEM POWER CABLE (BLU)
TO HYDRAULIC LEVELING PUMP

CABLE ASM-GENERATOR (GRN)
TO CHASSIS ELECTRICAL BOX

CABLE ASM-STARTER (RED)
TO STARTER

CABLE ASM-CHASSIS BATTERY DISCONNECT RETURN (PUR)
TO CHASSIS ELECTRICAL BOX

BATTERY
63739-01-000 (2)
63739-03-000 (2)
TIEDOWN ASM
160014-01-CHT (2)
BOLT
51387-06-000 (2)
NUT
D39-06-00B (3)
SPEED NUT
44364-02-000 (2)

LEVELING SYSTEM POWER CABLE (BLU)
TO HYDRAULIC LEVELING PUMP

CABLE ASM-STARTER (RED)
TO STARTER

CABLE ASM-CHASSIS BATTERY DISCONNECT RETURN (PUR)
TO CHASSIS ELECTRICAL BOX

DETAIL BA

- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 3 USED ON E-SERIES ONLY.
- 2 USED ON D-SERIES ONLY.
- 1 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.

NOTES:


- 40D INVERTER-DC/AC, 600 WATT
- 22W BATTERY-SECOND
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FIRST USED		
10 D/E-SERIES		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL,WH DIESEL		
SHEET 2	PART NO 173691	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

X-X

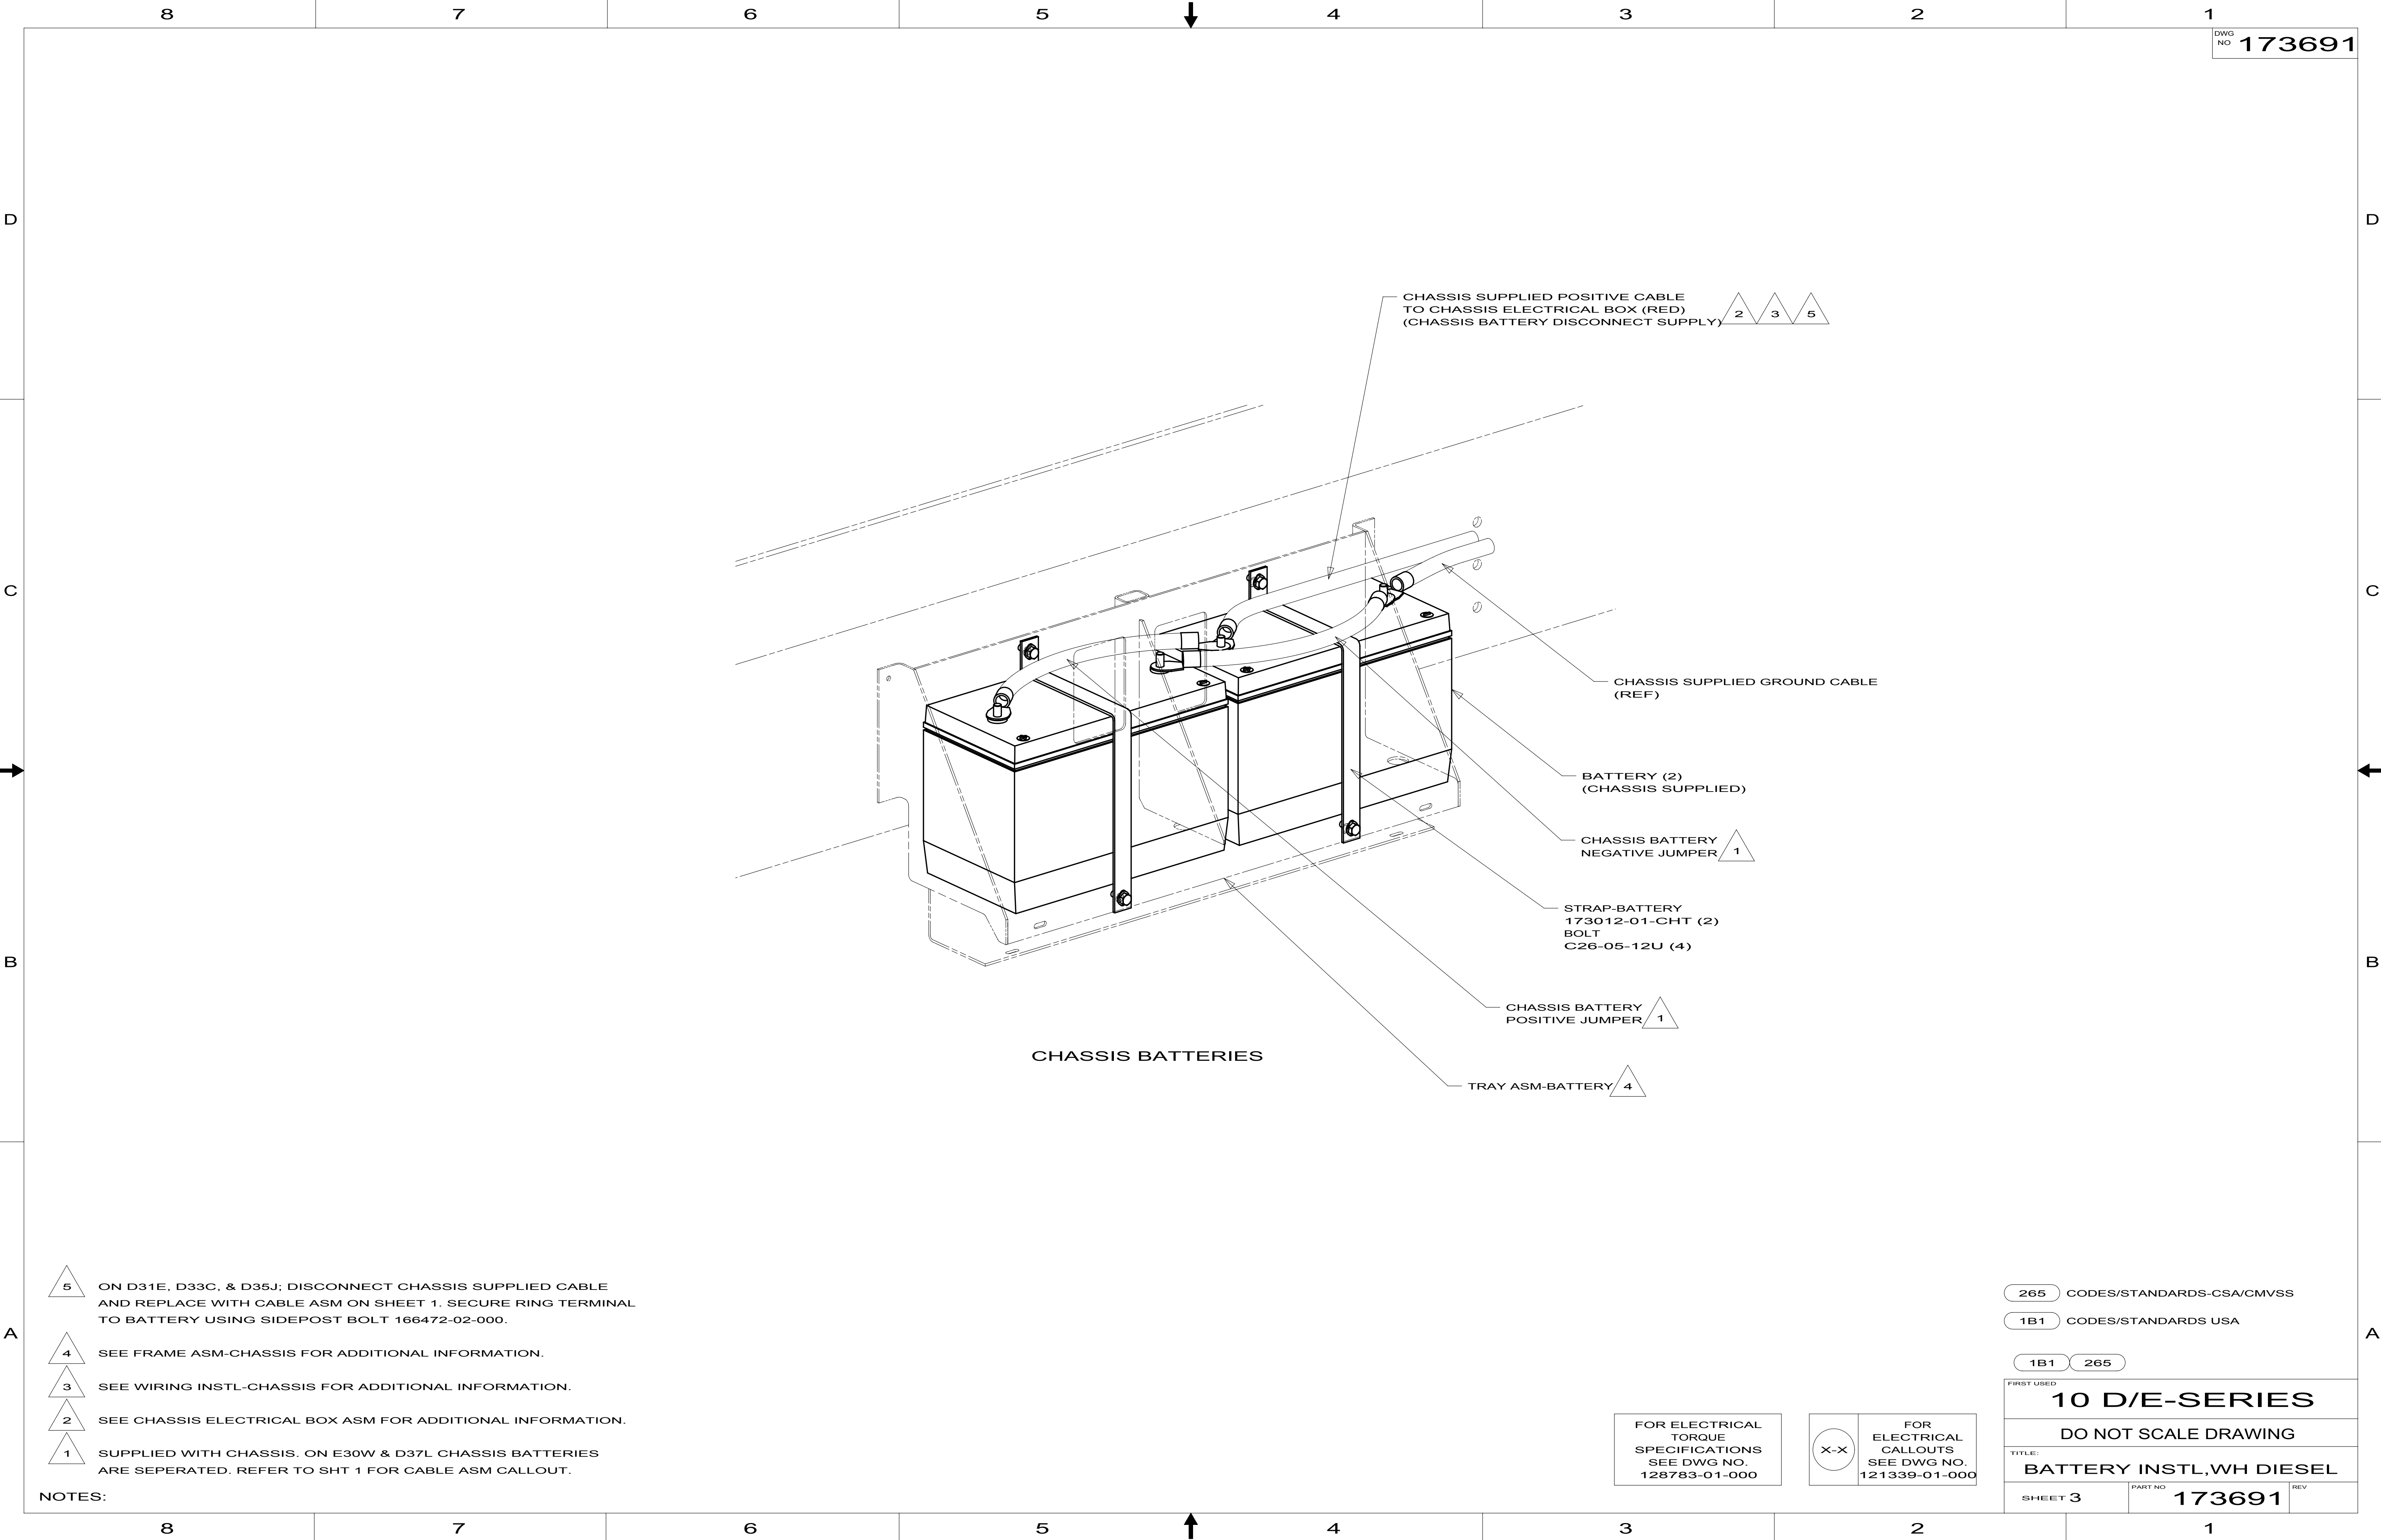

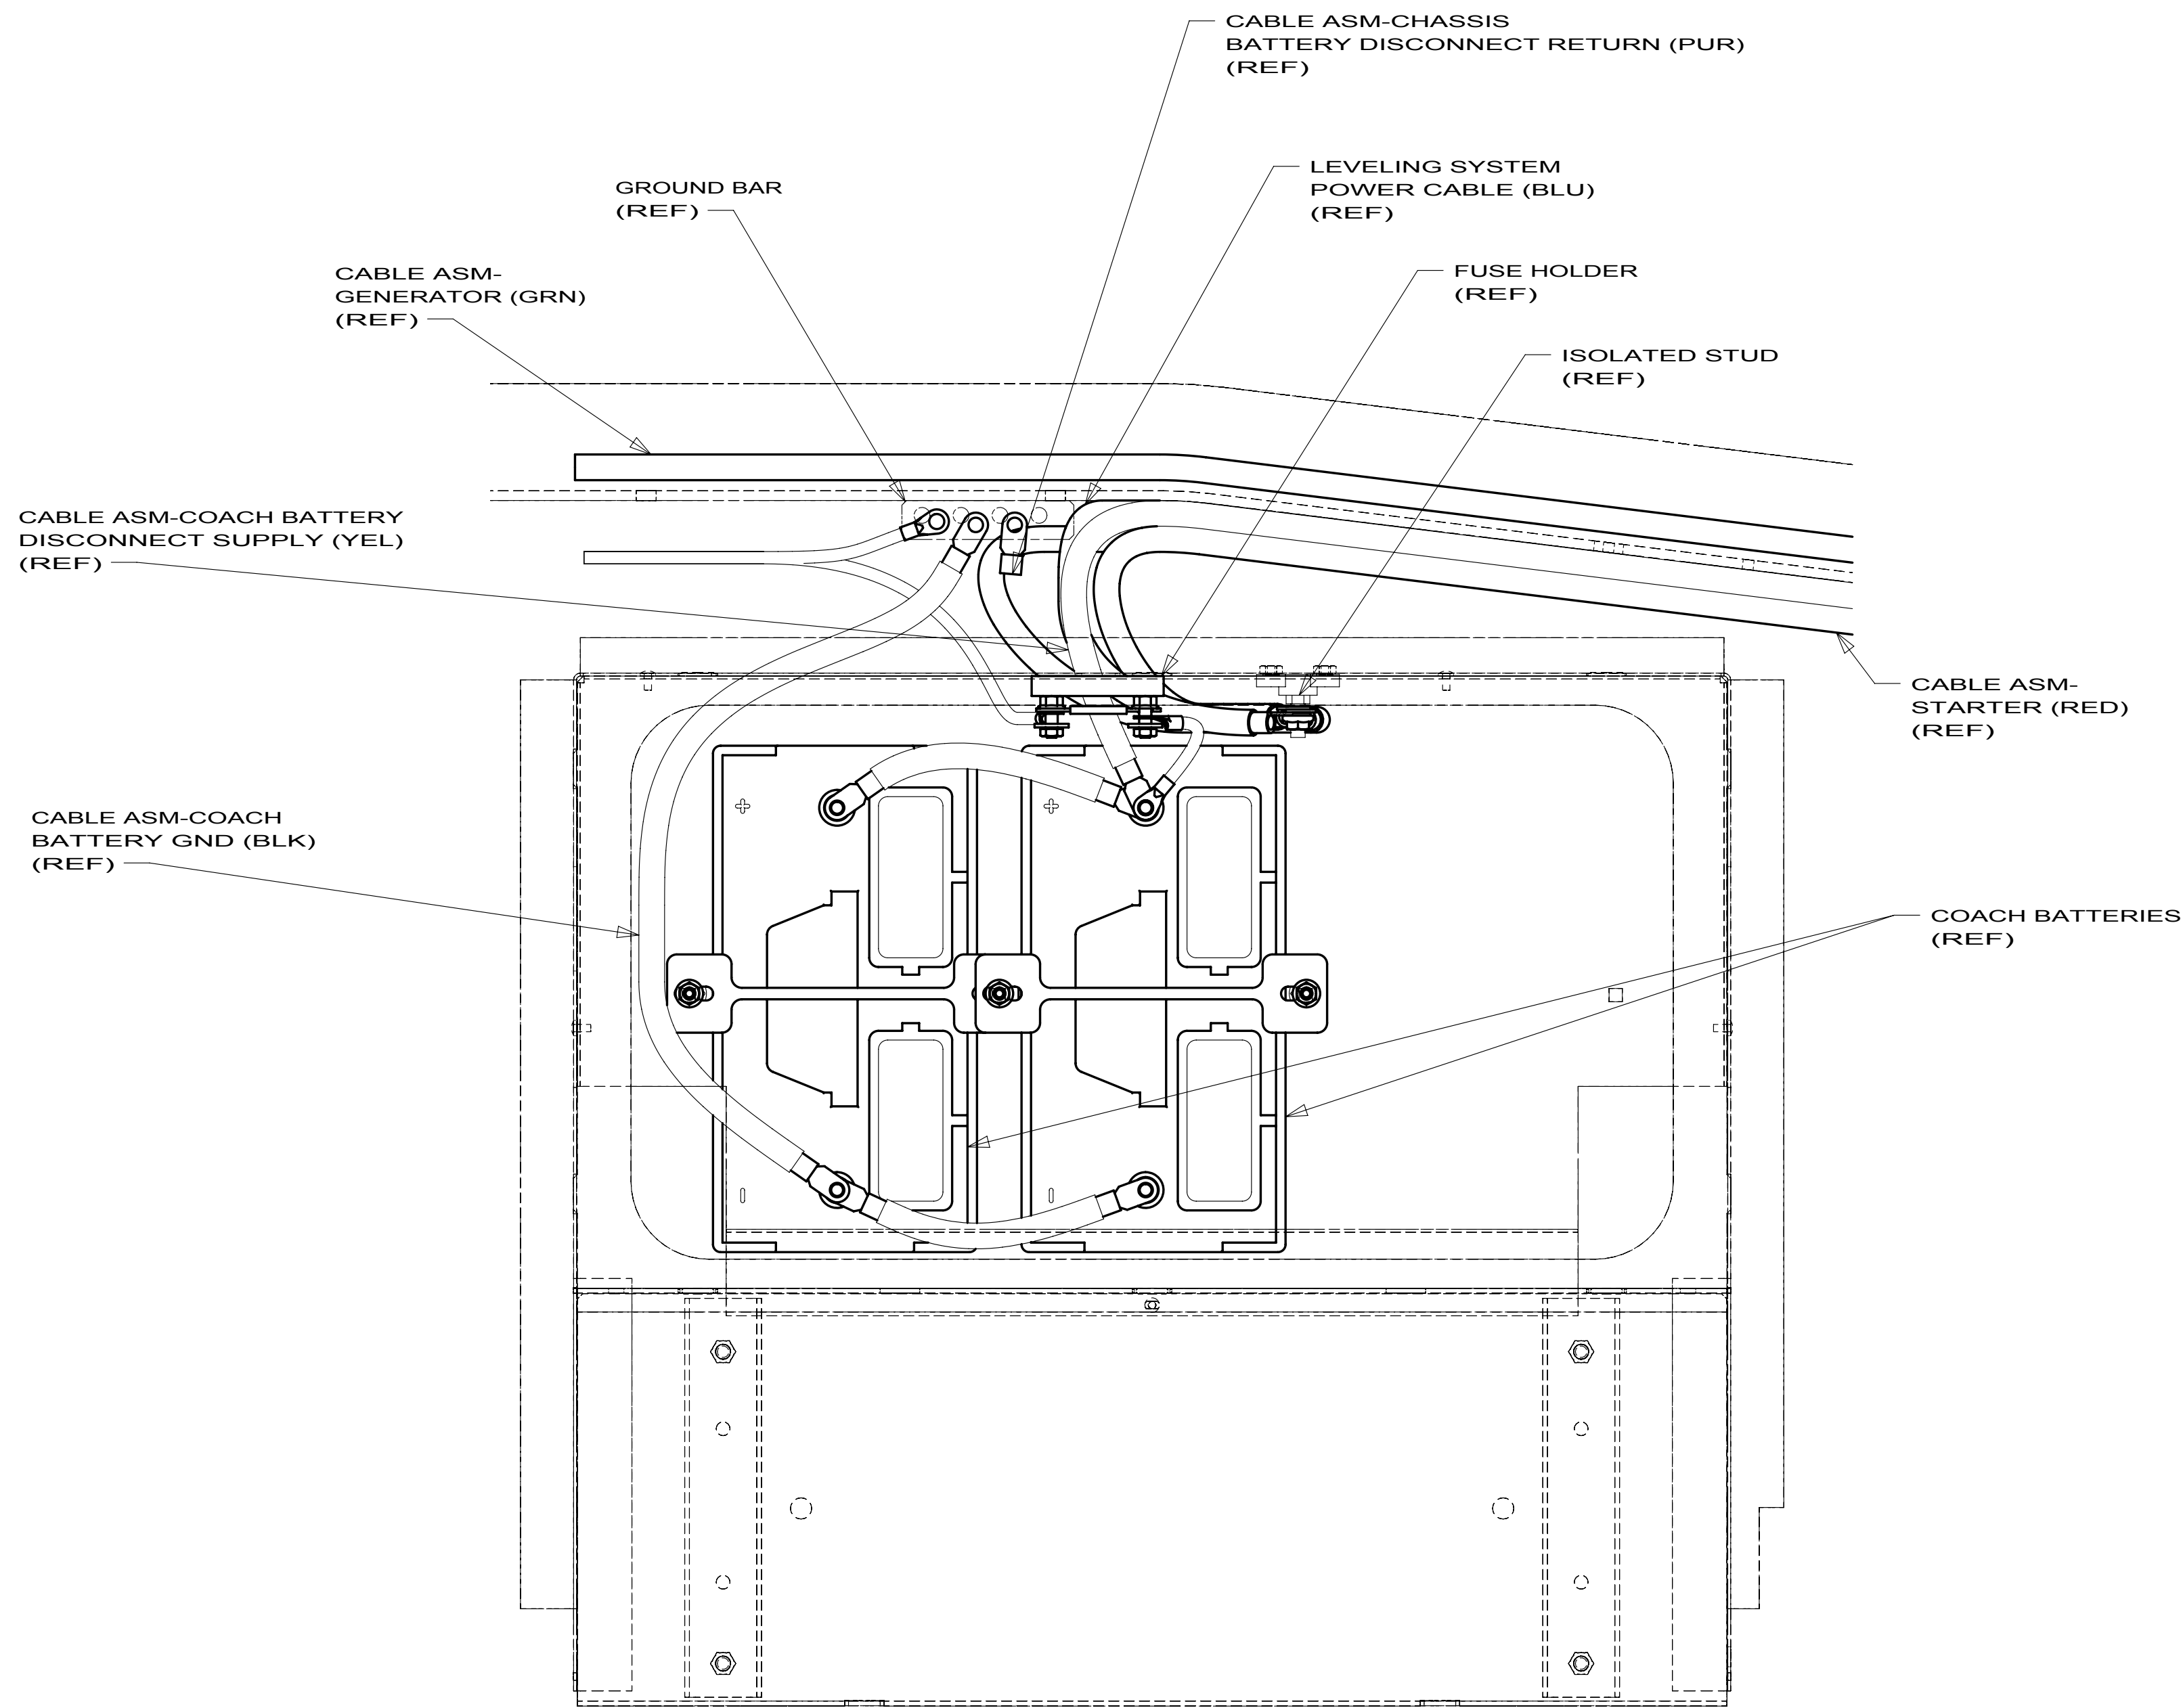

VIEW DA
(COACH BATTERIES)

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED
10 D/E-SERIES

DO NOT SCALE DRAWING

TITLE:
BATTERY INSTL,WH DIESEL

SHEET 4

PART NO
173691

REV

8

7

6

5

4

3

2

1

TERMINALS

NO.	PART NUMBER	DESCRIPTION
B-1	50003-01	TERMINAL-PIN, 16-14 GA,.156 DIA
B-2	50004-01	TERMINAL-RECP, 16-14 GA,.156 DIA
B-11	50003-02	TERMINAL-PIN, 16-14 GA,.180 DIA
B-12	50004-02	TERMINAL-RECP, 16-14 GA,.180 DIA
WP-1	106950-01	TERMINAL-PIN, 16-14 GA
WP-2	106950-02	TERMINAL-PIN, 10-12 GA
WP-3	106950-03	TERMINAL-PIN, 8 GA
R-1	35416-01	TERMINAL-RING, #10 STD, 8 GA
R-2	35416-02	TERMINAL-RING, #10 STD, 6 GA
R-3	35416-03	TERMINAL-RING, #10 STD, 10-12 GA
R-4	35416-04	TERMINAL-RING, #10 STD, 14-16 GA
R-5	37018-01	TERMINAL-RING, 5/16 STD, 12-10 GA
R-6	102777-01	TERMINAL-RING, #6 STD, 14-16 GA
R-7	102777-02	TERMINAL-RING, #6 STD, 10-12 GA
R-8	102777-03	TERMINAL-RING, #6 STD, 8 GA
R-9	33787-01	TERMINAL-RING, #10 STD, 14 GA
R-60	8325-01	TERMINAL-RING, 1/4 STD, 14-16 GA
R-61	8326-01	TERMINAL-RING, 3/8 STD, 14-16 GA
R-62	8327-01	TERMINAL-RING, #10 STD, 14-16 GA
R-63	8328-01	TERMINAL-RING, #10 STD, 10-12 GA
R-64	8328-02	TERMINAL-RING, 3/8 STD, 10-12 GA
R-65	8329-01	TERMINAL-RING, 3/8 STD, 8 GA
R-66	8331-01	TERMINAL-RING, 3/8 STD, 4 GA
R-67	8332-01	TERMINAL-RING, 1/4 STD, 6 GA
R-68	8332-02	TERMINAL-RING, 1/4 STD, 10 GA
R-69	8350-01	TERMINAL-RING, 3/8 STD, 6 GA
R-70	99275-02	TERMINAL-RING, 7/16 STD, 8 GA
R-71	101397-01	TERMINAL-RING, #10 STD, 14-16 GA
R-91	88791-01	TERMINAL-RING, 3/8, 90°, 1/0 GA
R-92	88791-02	TERMINAL-RING, 3/8, 90°, 2 GA
R-93	8348-01	TERMINAL-RING, 3/8 STD, 2 GA
R-94	99275-01	TERMINAL-RING, 7/16 STD, 1/0 GA
RF-51	7944-01	TERMINAL-SPADE, 12-10 GA, #8 STUD
RF-52	7945-01	TERMINAL-SPADE, 18-14 GA, #8 STUD
TR-1	47443-01	TERMINAL-RECP, 16-14 GA,.25, INS
TR-2	47443-02	TERMINAL-RECP, 12-10 GA,.25, INS
TR-3	47443-05	TERMINAL-RECP, 22-18 GA,.25, INS
TR-11	47443-03	TERMINAL-RECP, 16-14 GA,.19, INS
TR-12	47443-04	TERMINAL-RECP, 16-14 GA,.11, INS
TR-21	80015-01	TERMINAL-RECP, 22-18 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-22	80015-02	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-23	80015-03	TERMINAL-RECP, 16-14 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-24	80015-04	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .020
TR-51	7940-01	TERMINAL-RECP, 16-12 GA,.25, UNINS
TR-52	23809-01	TERMINAL-RECP, 16-14 GA,.19, UNINS
TR-53	23809-02	TERMINAL-RECP, 18-20 GA,.25, UNINS
TR-54	49270-01	TERMINAL-RECP, 18-20 GA,.19, UNINS
TR-55	7940-02	TERMINAL-RECP, 10 GA, .25, UNINS
TT-1	85745-02	TERMINAL-TAB, 16-14 GA,.25, INS
TT-2	85745-03	TERMINAL-TAB, 10-12 GA,.25, INS
TT-11	85745-04	TERMINAL-TAB, 18-22 GA,.19, INS
TT-51	7942-01	TERMINAL-TAB, 16-14 GA,.25, UNINS
TT-52	7943-01	TERMINAL-TAB, 14-10 GA,.25, UNINS
MF6-1	129236-01	TERMINAL-FEM, M/P, 630, 10-12
MF6-2	129236-02	TERMINAL-FEM, M/P, 630, 14-16

SPLICES

NO.	PART NUMBER	DESCRIPTION
BS-1	31876-01	SPLICE-BUTT, 16-14 GA, BLUE
BS-2	31876-02	SPLICE-BUTT, 12-10 GA, YELLOW
BS-3	31876-03	SPLICE-BUTT, 22-18 GA, RED
BS-SB	100070-01	SPLICE-BUTT, 14-16 GA, SHRINK,BLUE
BS-RB	112823-01	SPLICE-BUTT, 14-22 GA, REDUCER
BS-RS	173854-01	SPLICE-BUTT, 14-22 GA, REDUCER, SHRINK
S-1	7946-01	SPLICE, 1-6 MM ²
S-2	23808-01	SPLICE, 6-9 MM ²
I-2	7956-02	SHRINK WRAP .375 DIA
I-5	7956-05	SHRINK WRAP .25 DIA
SH-1	58028-01	SPLICE-HAT
S-10	101173-01	SPLICE-BARREL, 26300 CMA
SP-1	90986-02	PLUG ASM-ELECTRIC STEP
SP-2	142524-01-000 098261-01-000 098262-07-000 098261-02-000 (3) 098262-01-000 (3)	HOUSING-4 PIN SOCKET-CONNECTOR SEAL-CONNECTOR SOCKET-CONNECTOR SEAL-CONNECTOR
HR-1	63910-01	HOUSING-RELAY
MP-8	125323-02	HOUSING-PIN, 8 CAVITY
MP-10	125323-01	HOUSING-PIN, 10 CAVITY
MPP	125324-01	TERMINAL-MALE, M/P, 150
CAV-1	125325-01	SEAL-CAVITY, 150-SERIES M/P
CON-3	98262-03	SEAL-CONNECTOR
LS-8	125323-03	LOCK-SECONDARY 8 POSITION
LS-10	125323-04	LOCK-SECONDARY 10 POSITION
H-8	108355-01	HOUSING-SWITCH, 8 POSITION
H-12	108355-02	HOUSING-SWITCH, 12 POSITION

HOUSINGS AND TERMINALS

NO.	PART NUMBER	DESCRIPTION
HS-2	88474-10	HOUSING-SOCKET, 2 CAVITY
HS-3	88474-09	HOUSING-SOCKET, 3 CAVITY
HS-4	88474-08	HOUSING-SOCKET, 4 CAVITY
HS-5	88474-07	HOUSING-SOCKET, 5 CAVITY
HS-6	88474-06	HOUSING-SOCKET, 6 CAVITY
HS-7	88474-05	HOUSING-SOCKET, 6 CAVITY-IN LINE
HS-9	88474-03	HOUSING-SOCKET, 9 CAVITY
HS-12	88474-01	HOUSING-SOCKET, 12 CAVITY
HS-15	88474-02	HOUSING-SOCKET, 15 CAVITY
HS-2-R	88474-12	HOUSING-SOCKET, 2 CAVITY-RED
HP-2	88473-10	HOUSING-PIN, 2 CAVITY
HP-3	88473-09	HOUSING-PIN, 3 CAVITY
HP-4	88473-08	HOUSING-PIN, 4 CAVITY
HP-5	88473-07	HOUSING-PIN, 5 CAVITY
HP-6	88473-06	HOUSING-PIN, 6 CAVITY
HP-7	88473-05	HOUSING-PIN, 6 CAVITY-IN LINE
HP-8	88473-04	HOUSING-PIN, 8 CAVITY-IN LINE
HP-9	88473-03	HOUSING-PIN, 9 CAVITY
HP-12	88473-01	HOUSING-PIN, 12 CAVITY
HP-15	88473-02	HOUSING-PIN, 15 CAVITY
HP-2-R	88473-15	HOUSING-PIN, 2 CAVITY-RED
HP-3-B	88473-12	HOUSING-PIN, 3 CAVITY-BLUE
HP-3-G	88473-13	HOUSING-PIN, 3 CAVITY-GREEN
HP-3-R	88473-14	HOUSING-PIN, 3 CAVITY-RED
TS-1	88476-01	SOCKET-CONNECTOR, 20-14 GA
TS-2	88476-02	SOCKET-CONNECTOR, 12-10 GA
TP-1	88475-01	PIN-CONNECTOR, 20-14 GA
TP-2	88475-02	PIN-CONNECTOR, 12-10 GA
HS2HA	137208-01	HOUSING-SOCKET, 2 CAVITY-HIGH AMP
HP2HA	137207-01	HOUSING-PIN, 2 CAVITY-HIGH AMP
TS-HA	137210-01	SOCKET-CONNECTOR, 10AWG HIGH AMP
TP-HA	137209-01	PIN-CONNECTOR, 10AWG HIGH AMP
H-HA	104100-01	HOUSING, 1 CAVITY 75 AMP
T-HA	104100-03	TERMINAL 10 AWG - 6 AWG 75 AMP

1

2

FOR RECP-BLANK, DET-X DENOTES DETAIL VIEW.

CONTACT WIRE PREP PRIOR TO USING FOR TOOLING PURPOSES.

NOTES:

8

7

6

5

4

3

2

1

110 V WIRE

PART NUMBER

COLOR

LENGTH

POWER CORD

WIRE GAUGE

APPROVAL/ LISTING

LENGTH IN FEET

TERMINALS/SPLICES

PART NUMBER

QUANTITY

CONDUIT

TYPE

DIA IN 1/16" INCREMENTS

LENGTH (mm)

RECEPTACLES

PART NUMBER

CIRCUIT COLOR

LOCATION

12 V WIRE

CIRCUIT

COLOR & WIRE GAUGE

HOUSING POSITION/ TERMINATION

WINNEBAGO INDUSTRIES

COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.

DFTR

CHRR

P.E.

M.E.

DSNR

ORIG. DATE

ALL DIMENSIONS ARE IN MILLIMETERS

FIRST USED

96 MH'S

UNSPECIFIED TOLERANCES ARE:

MATERIAL:

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 1 OF 7


PART NO 121339

REV

REF:

1

2/16/2010

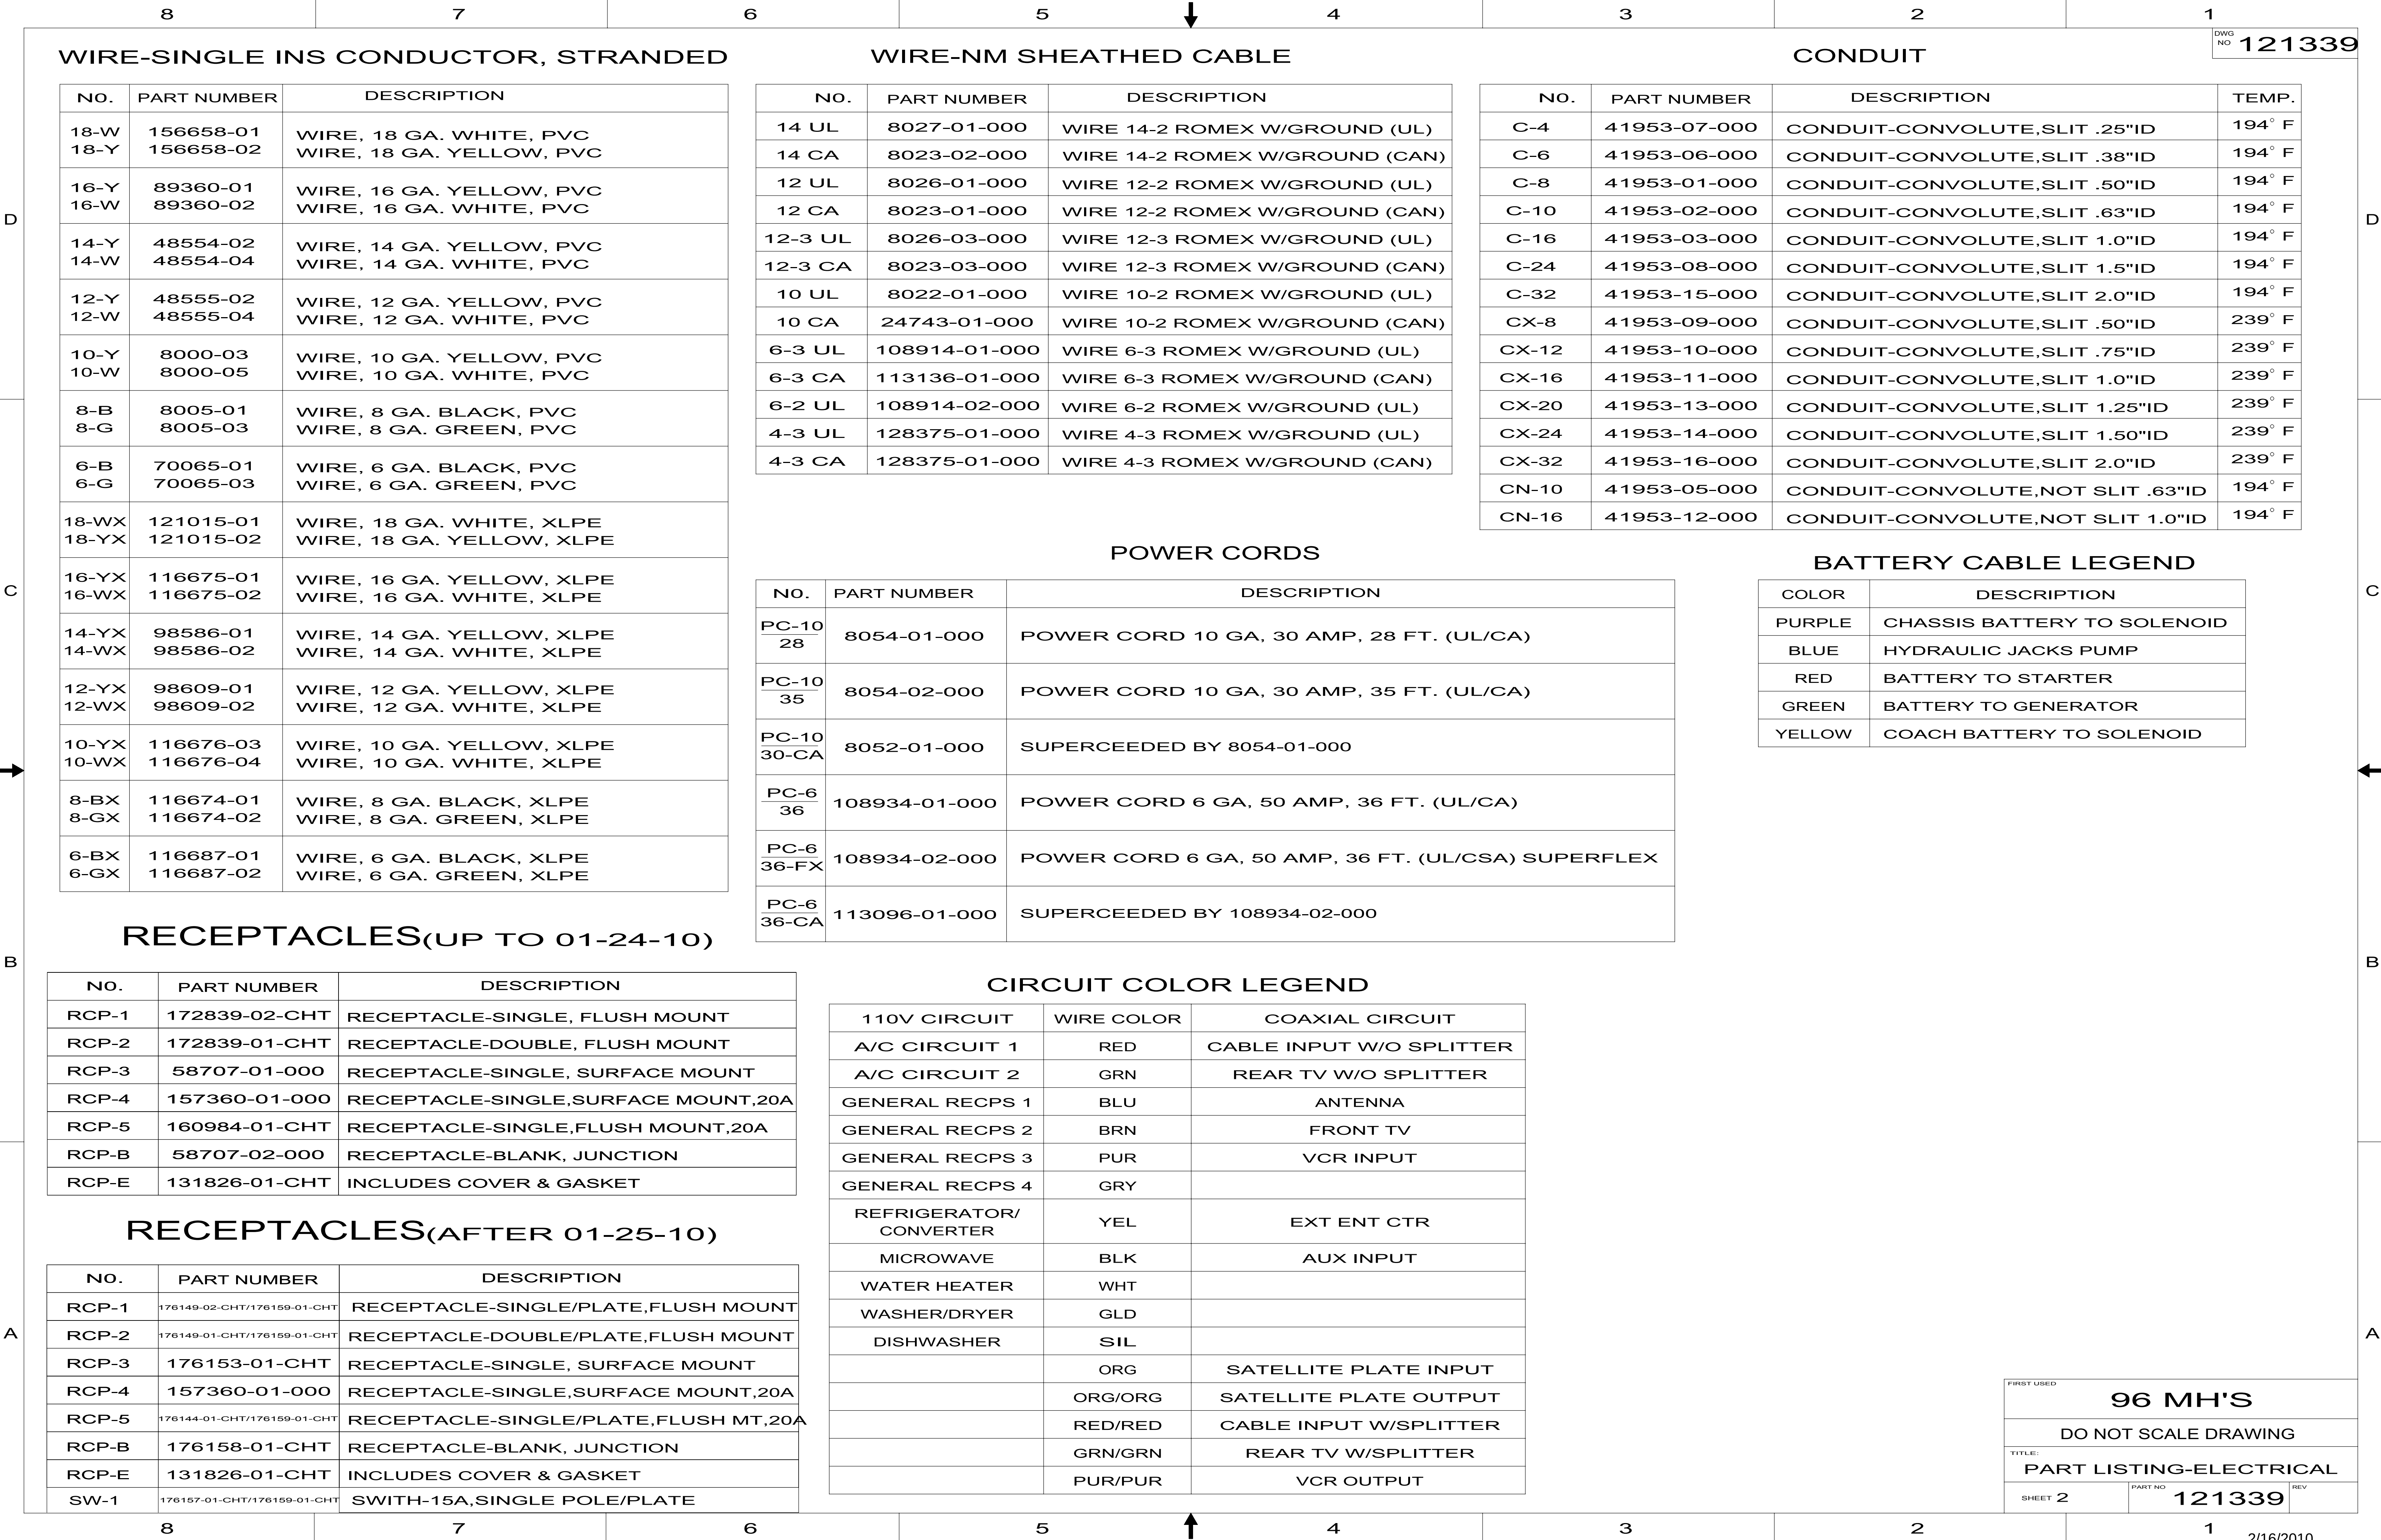

8

7

6

5








4

3




2

1

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-1	LAMP 98024-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-1	LAMP 98024-03-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-1	LAMP 98024-05-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-1	LAMP 98024-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N1	LAMP 98024-07-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LF2N1	LAMP 98024-08-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN1	LAMP 98024-09-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,PORCH

NO	PART NUMBER	DESCRIPTION
LEXT-1	LAMP 97917-01-CHT SCREW G67-10-129 (4) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, SURFACE MOUNT BARGMAN 
LEXT-2UL	LAMP 8089-01-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED UL LIST JRV PROD 
LEXT-2CA	LAMP 8089-02-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED CAN LIST JRV PROD 
LEXT-3	LAMP 171513-01-CHT SCREW G67-10-129 (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH SURFACE MOUNT OPTRONICS

87.0

22.2 R

96

CUT OUT IN PANEL

HALOGEN LAMP

LINE SPRING CLIPS UP WITH RELIEF IN CUT OUT

DETAIL CA

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

XXXXXX

XX

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 3





PART NO121339

REV





DWG NO121339

2/16/2010







LAMP ASM-PACKAGE,PANCAKE


NO	PART NUMBER	DESCRIPTION
LF1-2	LAMP 137417-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-2	LAMP 137417-04-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-2	LAMP 137417-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-2	LAMP 137417-05-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N2	LAMP 137417-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN2	LAMP 137417-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 


LAMP ASM-PACKAGE,HALOGEN




NO	PART NUMBER	DESCRIPTION
HAL	LAMP 123775-01-CHT SCREW (SUPPLIED) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING 1 BULB 
HAL-S	LAMP 123775-01-CHT SPACER 123775-02-CHT SCREW G13-06-16U (3) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING WITH 3/4" SPACER 1 BULB 
HAL-2	LIGHT-HAL,ROUND 165170-01-CHT SCREW G13-06-12B (2) CONNECTOR 58028-01-000 (2)	LIGHT-HALOGEN, ROUND 3" 
HAL-4	LIGHT-HAL,ROUND 165643-01-CHT SCREW G13-05-16B (3) CONNECTOR 58028-01-000 (2) (SEE DETAIL CA)	LIGHT-HALOGEN, ROUND 4.5" 




<

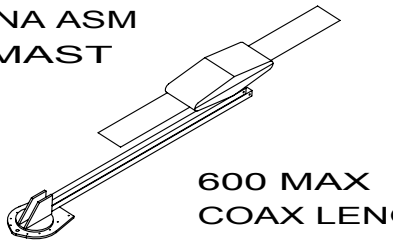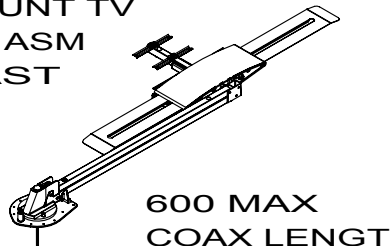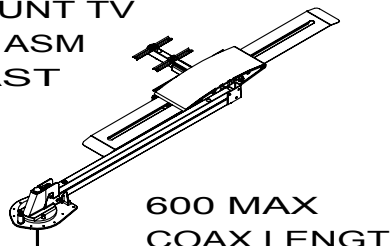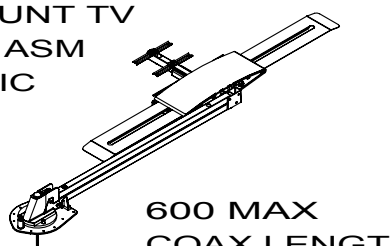

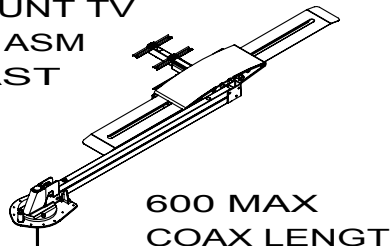
ANTENNA ASM-PACKAGE		
NO	PART NUMBER	DESCRIPTION
ANT-1	ANTENNA 76319-24-000 HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ¹ CLIP 80734-02-000	ROOF MOUNT TV ANTENNA ASM 25.5" MAST  600 MAX COAX LENGTH
	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ¹ ADAPTER SUPPLIED W/ANTENNA	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANT-2W	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ¹ ADAPTER SUPPLIED W/ANTENNA WEDGE 76319-26-000	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANTA-1	ANTENNA 158270-01-CHT BUMPER 69726-02-000 (2) ¹ ADAPTER SUPPLIED W/ANTENNA ANTENNA-WINGMAN, ACCESSORY 173519-03-CHT	ROOF MOUNT TV ANTENNA ASM AUTOMATIC  600 MAX COAX LENGTH
ANT-3	ANTENNA-TV ROOF MNT.ROUND 167632-01-CHT PLATE-ROOF, CABLE ENTRY 146488-01-000 SCREW G67-10-129 (10) CABLE ASM-COAX 87105-01-006 ADAPTER 82134-01-000	ROOF MOUNT OMNI- DIRECTIONAL ANTENNA MOUNTING SCREWS SUPPLIED WITH ANTENNA 
ANT-4	ANTENNA 173519-01-CHT HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ¹ ADAPTER SUPPLIED W/ANTENNA ANTENNA-HANDLE EXTENSION 173519-02-CHT	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH

SENSORS		
NO	PART NUMBER	DESCRIPTION
LPGD	LP GAS DETECTOR 150138-03-CHT SCREW G68-06-10U (2)	DETECTOR-LP GAS 

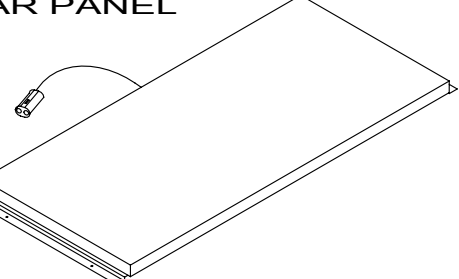PANELS		
NO	PART NUMBER	DESCRIPTION
SOLAR	PANEL-SOLAR 10 WATT 151647-01-000 SCREW G11-08-12U (4)	SOLAR PANEL 

ANTENNA ASM-PACKAGE		
ANTEXT-1	CABLE ASM-EXTENS 77069-02-000	RADIO ANTENNA CABLE EXTENSION 2400MM USABLE LENGTH 
ANTKIT-1	ADAPTER-PLATE 76319-06-000 SCREW G11-08-08T (6) CLIP-WIRE 80734-02-000 SCREW G11-08-08T	PLATE ASM-ADAPTERS CABLE ROOF MOUNTING PLATE W/ CABLE-CABLE ADAPTER, FITTINGS, AND CABLE RETAINING CLIP 
ANT-R	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT ANTENNA 109889-04-000 BRACKET-ANTENNA GROUND 147741-01-CHT	ROOF MOUNT RADIO ANTENNA 
ANTEXT-2	CABLE ASM-EXTENS 77069-03-000	RADIO ANTENNA CABLE EXTENSION 6600 MM USABLE LENGTH
ANT-A	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT 76 MM 171825-01-000 (2) BRACKET-GROUND 147741-01-CHT NUT OMD01K-06-000 (2)	ROOF MOUNT RADIO ANTENNA THICK ROOF

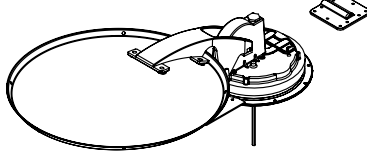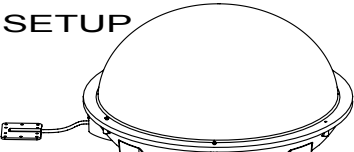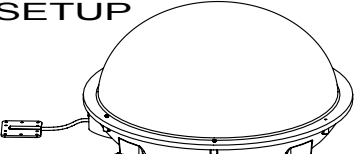SATELLITE DISH INSTL		
NO	PART NUMBER	DESCRIPTION
DM-1	SATELLITE DISH 137135-02-000 SCREW G67-10-12B (8) PLATE & BRACKET (SUPPLIED) SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 
DA-1	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-1	SATELLITE DISH 154474-04-CHT SCREW G39-10-12B (12) PLATE 146488-01-000 SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM IN MOTION SETUP 

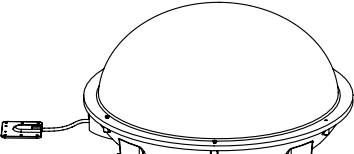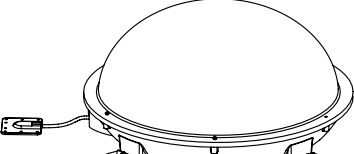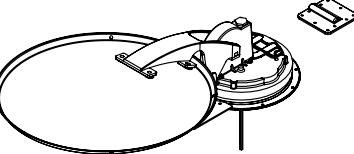SATELLITE DISH INSTL		
NO	PART NUMBER	DESCRIPTION
DA-2	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-2	SATELLITE DISH 154474-04-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DM-2	SATELLITE DISH 137135-05-000 PLATE-ROOF,ENTRY (SUPPLIED WITH SATELLITE DISH) SCREW G67-10-12U (8) (FOR ROOF PLATE) SCREW G67-10-12U (10) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

XXXXXX



XX

¹ ADD BUMPER TO BOTTOM SIDE OF ANTENNA WINGS TO PREVENT DAMAGE TO ROOF.



87654321

DWG NO121339






RECEPTACLE PACKAGE-GFI

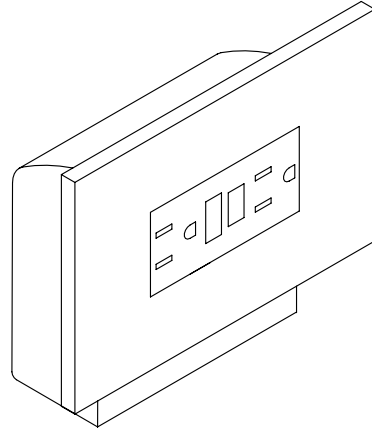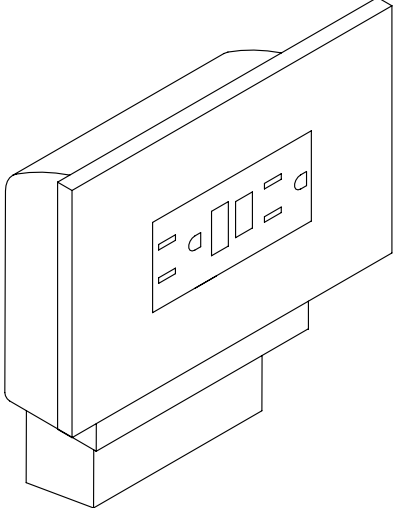NO	PART NUMBER	DESCRIPTION
<u>GFI</u> US	RECEPTACLE 163319-01-CHT BOX 91910-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI</u> CAN	RECEPTACLE 163319-01-CHT BOX 91910-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

RECEPTACLE PACKAGE-GFI

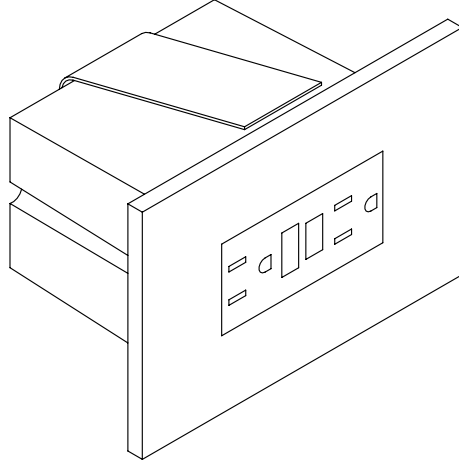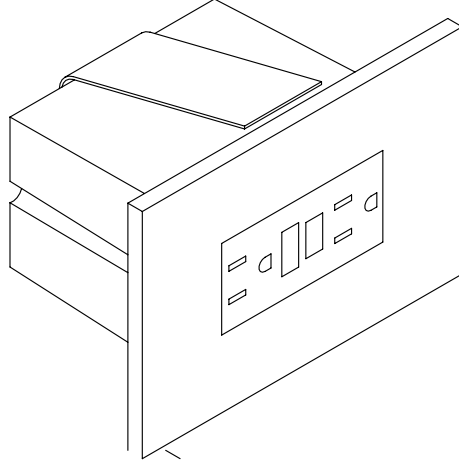
NO	PART NUMBER	DESCRIPTION
<u>GFI-1</u> US	RECEPTACLE 163319-01-CHT BOX 133070-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI-1</u> CAN	RECEPTACLE 163319-01-CHT BOX 133070-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

SPACERS

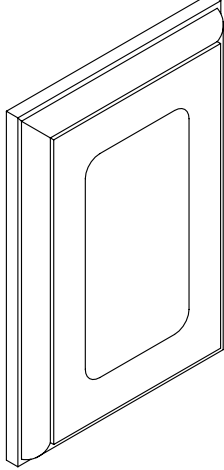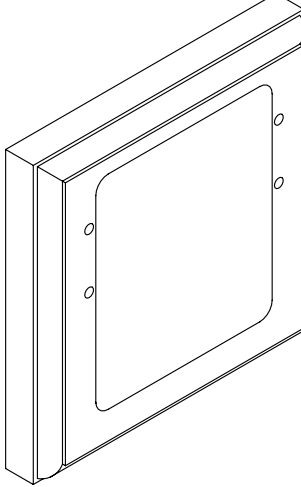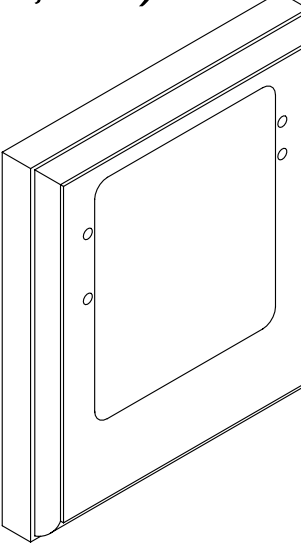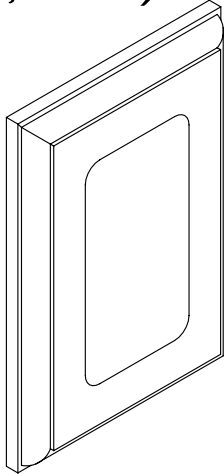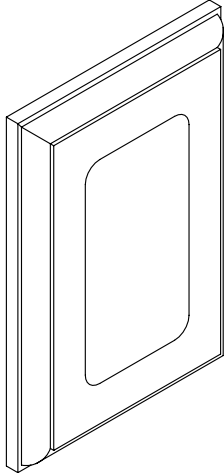NO	PART NUMBER	DESCRIPTION
SP-01	SPACER 102568-01-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,OG) 
SP-02	SPACER 102568-02-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (US) (WOOD,VYL RAP,OG) 
SP-03	SPACER 102568-03-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (CANADA) (WOOD,VYL RAP,OG) 
SP-04	SPACER 133713-01-CHT	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,BEV) 
SP-05	SPACER 133713-20-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,BEV) 

SP-21

SPACER
126052-01-XXX

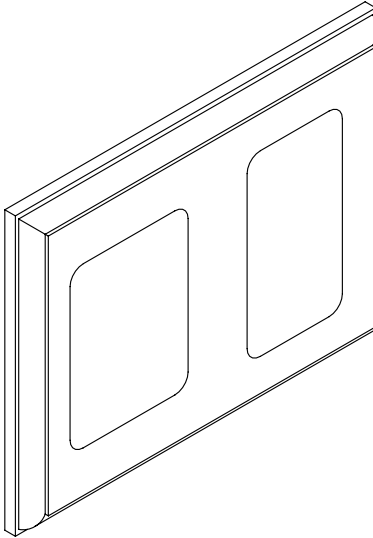WOOD SPACER FOR 1 - 110V
RECEPTACLE AND 1 - REAR TV
(12V) JACK
(WOOD,BEV)


LEGEND

MISC.	SPACER
PART NUMBER LISTING XXXX XXX	XXXX PART NUMBER

NOTES:

1

APPLY TUBING TO BARE GROUND WIRES.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 6

PART NO121339

REV

2/16/2010

87654321

D

C



B

A


1

DWG NO121339


PREP-A/C, RECESSED (W/OUT FACTORY A/C)

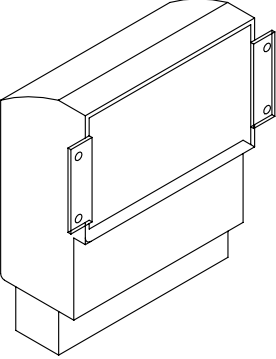NO	PART NUMBER	DESCRIPTION
PREP A/C-US	BOX 91910-02-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). US APPLICATION (RECESSED IN ROOF) 
PREP A/C-CAN	BOX 91910-01-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). CANADA APPLICATION (RECESSED IN ROOF) 


CONNECTION BOX-POWER CORD

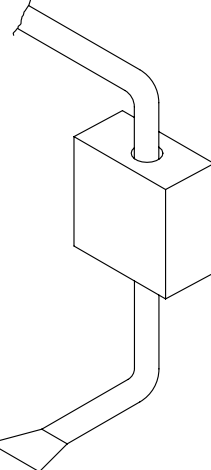NO	PART NUMBER	DESCRIPTION
J-PC 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 CONNECTOR 8314-01-000 (3) CONNECTOR 8356-02-000 CONNECTOR (PC) 8355-01-000	CONNECTION BOX IN POWER CORD COMPT FOR POWER CORD (US & CA APPLICATION) 
J-PC 30-US		
J-PC 30-CA		


CONNECTION BOX-GENERATOR RECEPTACLE

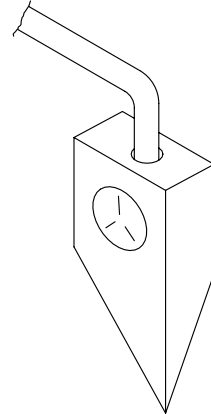NO	PART NUMBER	DESCRIPTION
J-RCP 30	BOX 8289-01-000 RECEPTACLE 24924-02-000 COVER 69238-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 133678-04-000 CONNECTOR 8314-01-000 TUBING-VINYL 8041-02-000 (150MM)	CONNECTION BOX IN POWER CORD COMPT FOR THE GENERATOR RECEPTACLE (US & CA APPLICATION) 
J-RCP 30-US		
J-RCP 30-CA		

CONNECTION BOX, GENERATOR SERVICE FEED

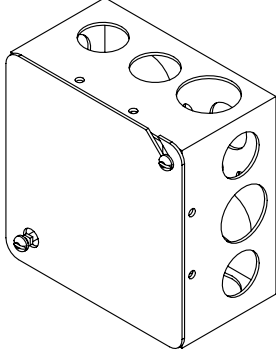NO	PART NUMBER	DESCRIPTION
J-GEN 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 WIRE NUT-GREY 8314-01-000 (3) CONNECTOR-WIRE 8356-01-000	BOX AND EQUIPMENT USED FOR CONNECTING THE GENERATOR LEADS TO THE SERVICE ENTRANCE WIRES (US & CA APPLICATION) 
J-GEN 30-US		
J-GEN 30-CA		

PREP-A/C, SURFACE (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP SURF	BOX 93603-01-000 COVER 53337-01-000 LABEL 91243-01-000 WIRE-BONDING 8019-01-000 SCREW G11-08-12B (2) TERMINAL 8328-01-000 CONNECTOR 8313-01-000 (2) CONNECTOR 8311-01-000	SURFACE MOUNT, US AND CANADA, BOX AND EQUIPMENT FOR A/C PREP (W/OUT FACTORY A/C). TYPICALLY LOCATED ON OVERHEAD CABINET INNER WALL OR ON CEILING. 

LEGEND

PART NUMBER

LISTING

XXXX

XX

NOTES:

1 APPLY TUBING TO BARE GROUND WIRES.


96 MH'S

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL

SHEET 7PART NO121339REV

2/16/2010

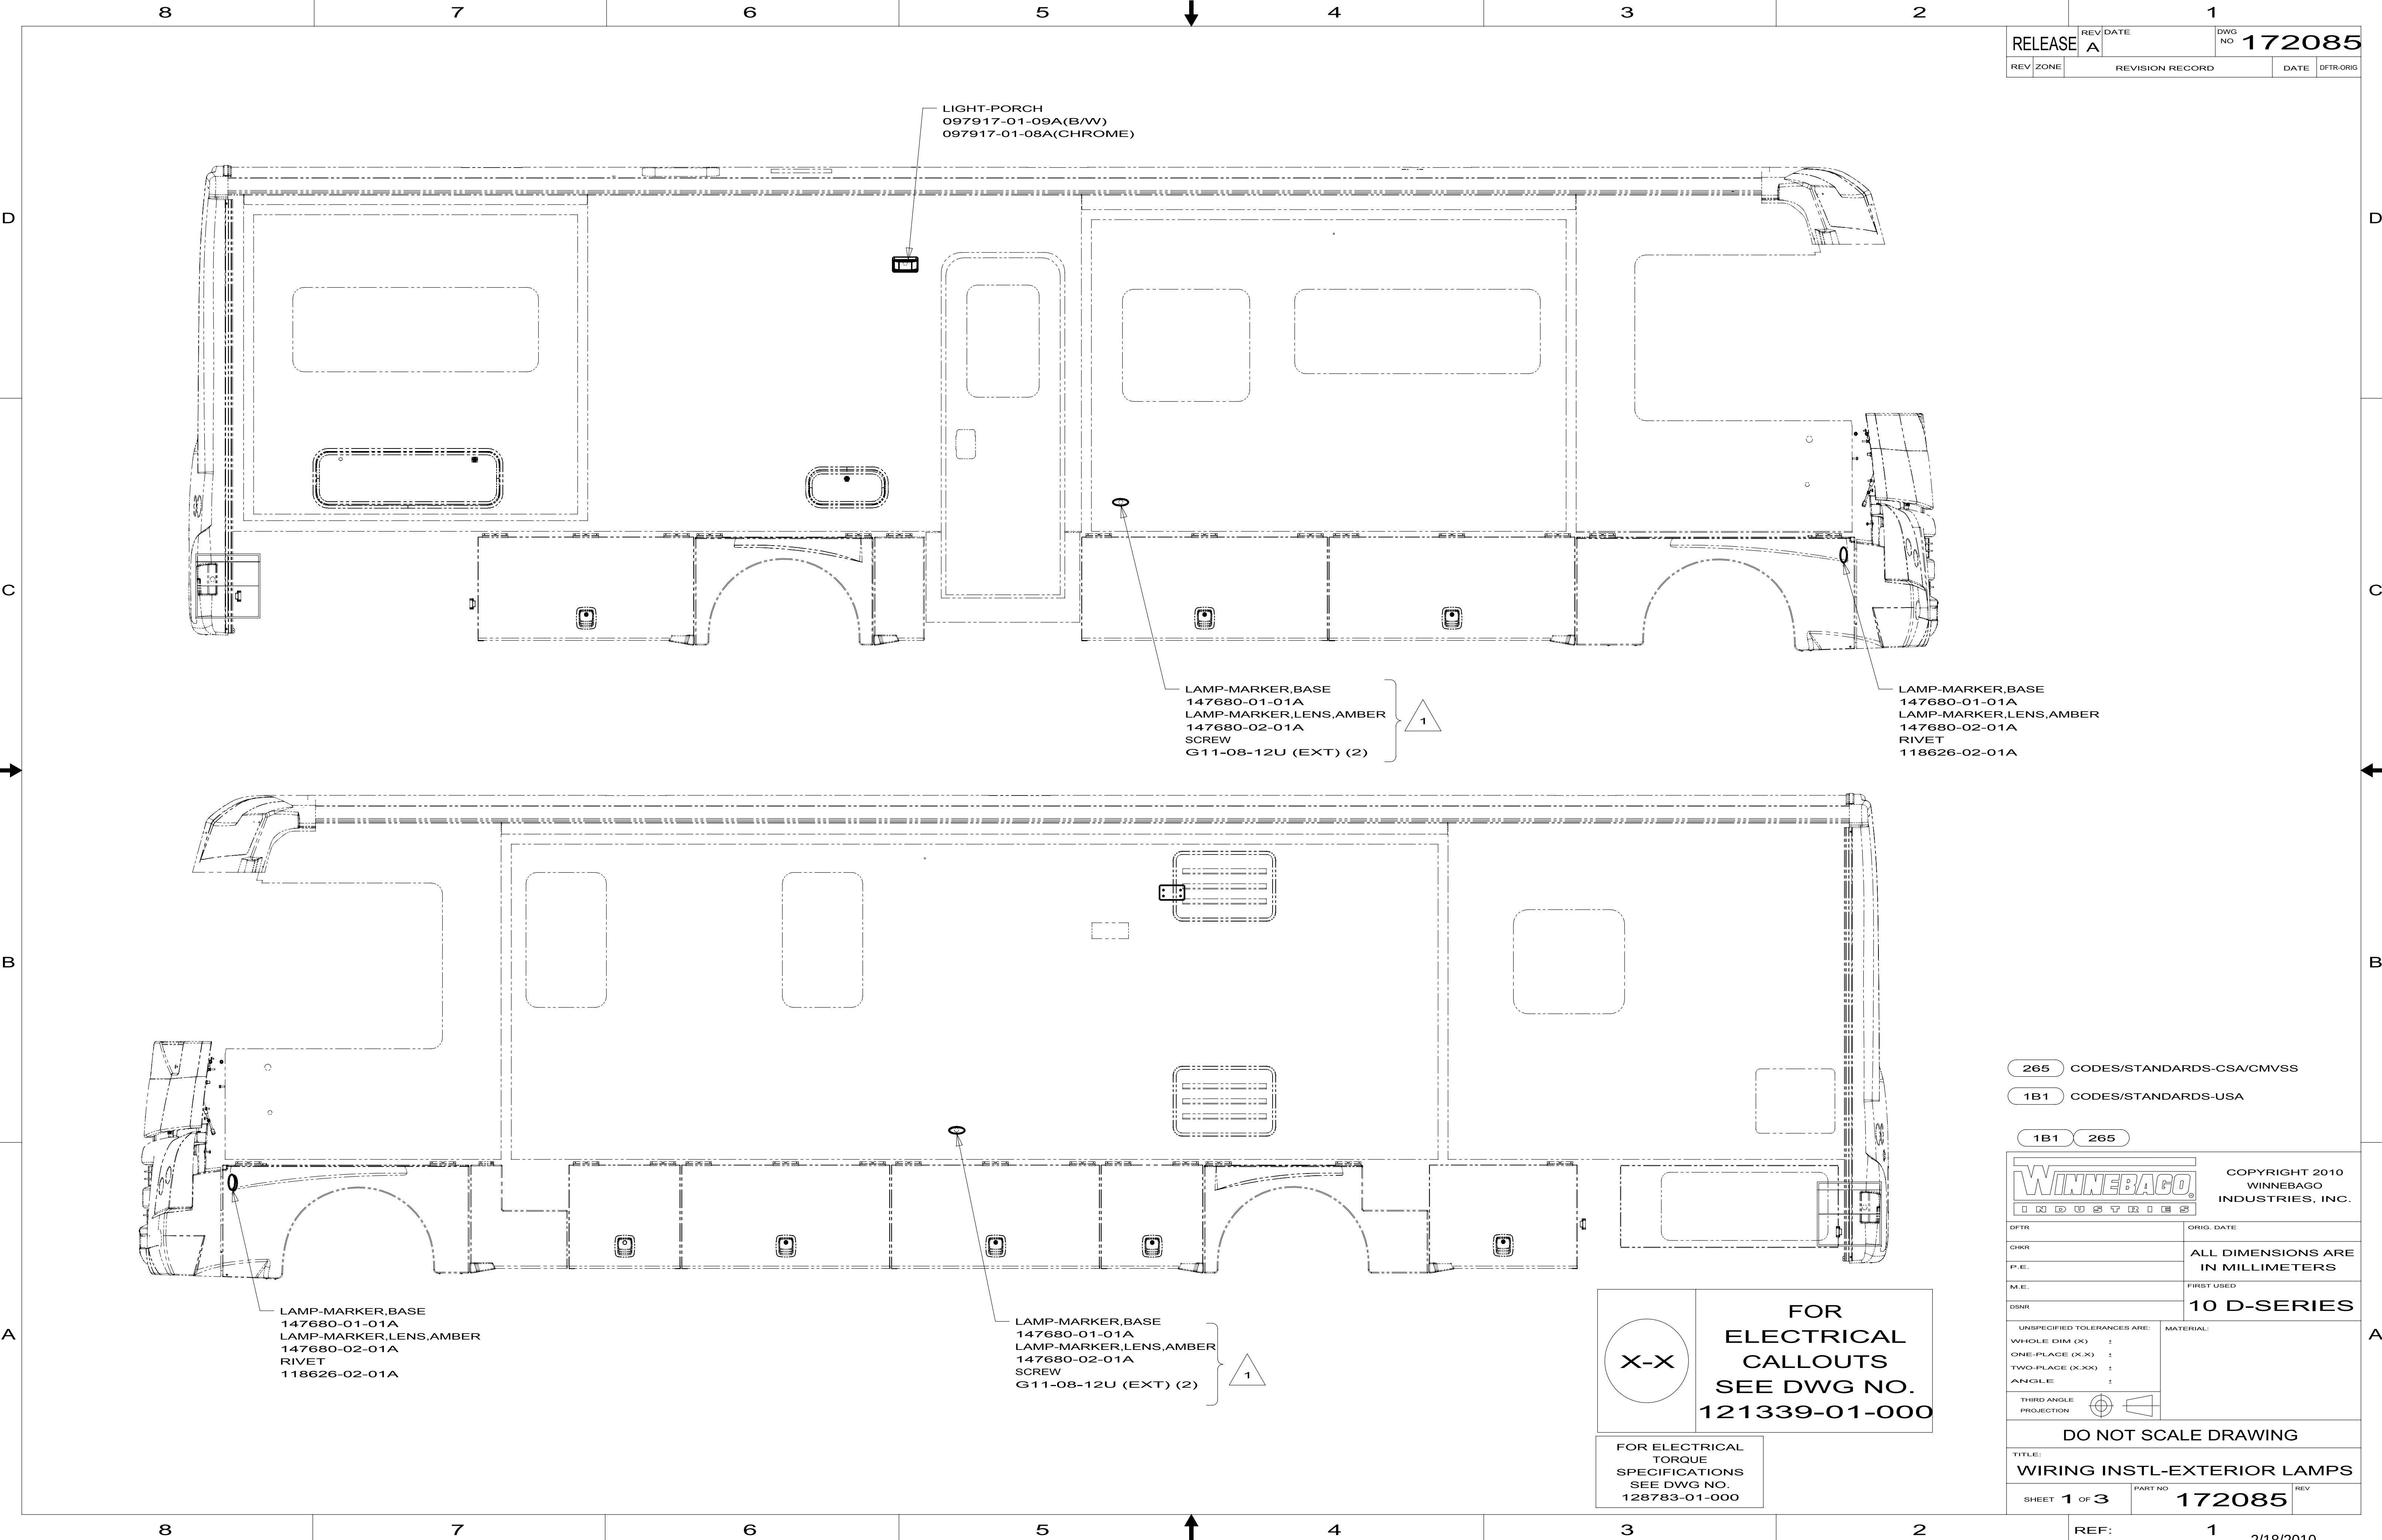

LAMP-MARKER,BASE
147680-01-01A (5)
LAMP-MARKER,LENS,AMBER
147680-02-01A (5)
SCREW
G11-08-12U (EXT) (10)
CONNECTOR
58028-01-000 (10)

WIRE ASM-CLEARANCE LAMPS
129943-01-000

2 PIN HOUSING
TO WIRE ASM-
IP, MAIN

CHASSIS HOUSING
TO CHASSIS HEADLAMP
CONNECTOR

HEADLAMP ASM-HIGH
146527-02-000 (2)

HEADLAMP ASM-LOW
146527-01-000 (2)

TO RIGHT SIDE
MARKER LAMP

LAMP ASM-PARK/TURN
146560-03-000 (2)
BULB
112708-01-000 (2)

RING TERMINAL
TO GROUND BOLT

TO LEFT SIDE
MARKER LAMP

LAMP-BACKUP
172560-04-000

LIGHT ASM-STOP/TURN
172560-02-000

LAMP-MARKER,RED
117826-01-000 (2)
GASKET-MARKER LIGHT
117826-03-000 (2)
BULB
36196-01-000 (2)
SCREW
G11-08-12U (EXT) (4)

REFLECTOR-STICK ON-RED
106646-02-000 (2)

LIGHT-LICENSE
066432-02-000
SCREW
G39-08-12T (EXT) (2)
CONNECTOR
58028-01-000 (2)

LAMP-LICENSE PLATE
87201-01-000
SCREW
G11-06-12U (EXT) (2)

CONNECTOR-TRAILER
157593-01-000
SCREW
101618-01-000

LAMP-MARKER,BASE
147680-01-01A (5)
LAMP-MARKER,LENS,RED
147680-03-01A (5)
SCREW
G11-08-12U (EXT) (10)
CONNECTOR
58028-01-000 (10)

LAMP ASM-BRAKE
136916-01-000
SCREW
G11-08-20T (2)
CONNECTOR
58028-01-000 (2)
BLK/WHT TO YEL
BLK TO WHT

LIGHT ASM-STOP/TURN
172560-01-000

LAMP-BACKUP
172560-03-000

SCREW
157288-01-01A (7)

SCREW
157288-02-CHT

SCREW
157288-01-01A (7)

SCREW
157288-02-CHT

NUT
76327-01-000 (3)

HEADLAMPS
(BACK VIEW)

- 12 CONNECT 4 PIN HSG WITH WRAP OF RED TAPE TO THE STOP/TURN/TAILLAMP.
- 11 MOUNT LIGHT SUCH THAT THE MOLDED CONNECTOR ON LIGHT IS TOWARD THE BOTTOM.
- 10 USED ON D33C ONLY.
- 9 USED ON D31E, D35J, D37L.
- 8 THE 2 PIN HOUSING WITH CIRCUITS NB & DDM, FOR THE RIGHT SIDE, AND NB & DDL FOR THE LEFT SIDE IS TO BE PLUGGED INTO THE OUTBOARD LOW BEAM HEADLAMP.
- 7 THE 2 PIN HOUSING WITH CIRCUITS NA & DDM, FOR THE RIGHT SIDE, AND NA & DDL FOR THE LEFT SIDE IS TO BE PLUGGED INTO THE OUTBOARD LOW BEAM HEADLAMP.
- 5 CONNECTOR-PLUG,TRAILER 146246-01-000 TO BE SUPPLIED IN COACH WITH 240
- 4 MOUNT LIGHT SUCH THAT THE MOLDED CONNECTOR ON LIGHT IS TOWARD THE TOP.
- 3 SECURE WIRE ASM APPROX. EVERY 450 TO BATTERY CABLES AND BRACKETS. USE TIE-WIRE 8343-01-000 OR 93147-01-000 AS APPROPRIATE.
- 2 CLEAN PAINT OFF METAL (BOLT) BEFORE CONNECTING GROUND TO INSURE CONTACT. ALSO MOUNT CHASSIS SUPPLIED HORN TO GROUND BOLT.

1. GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS AND BUNDLE AND SECURE WITH TIE-WIRE 8343-01-000 OR 93147-01-000.

NOTES:

1PU	WKHRSE 22K 230HP DSL 22.5TIR
1PE	WORKHORSE 20,500 DSL 230HP
1PS	WORKHORSE 22,000#-22.5 TIRE
16L	FORD 22,000#-22.5 AL WHL
1PR	WORKHORSE 22,000#-19.5 TIRE
16K	FORD CHASSIS 22,000
240	TRAILER HITCH
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA

1B1 265

FIRST USED

10 D-SERIES

DO NOT SCALE DRAWING

TITLE:


WIRING INSTL-EXTERIOR LAMPS

SHEET 2

PART NO

172085

REV

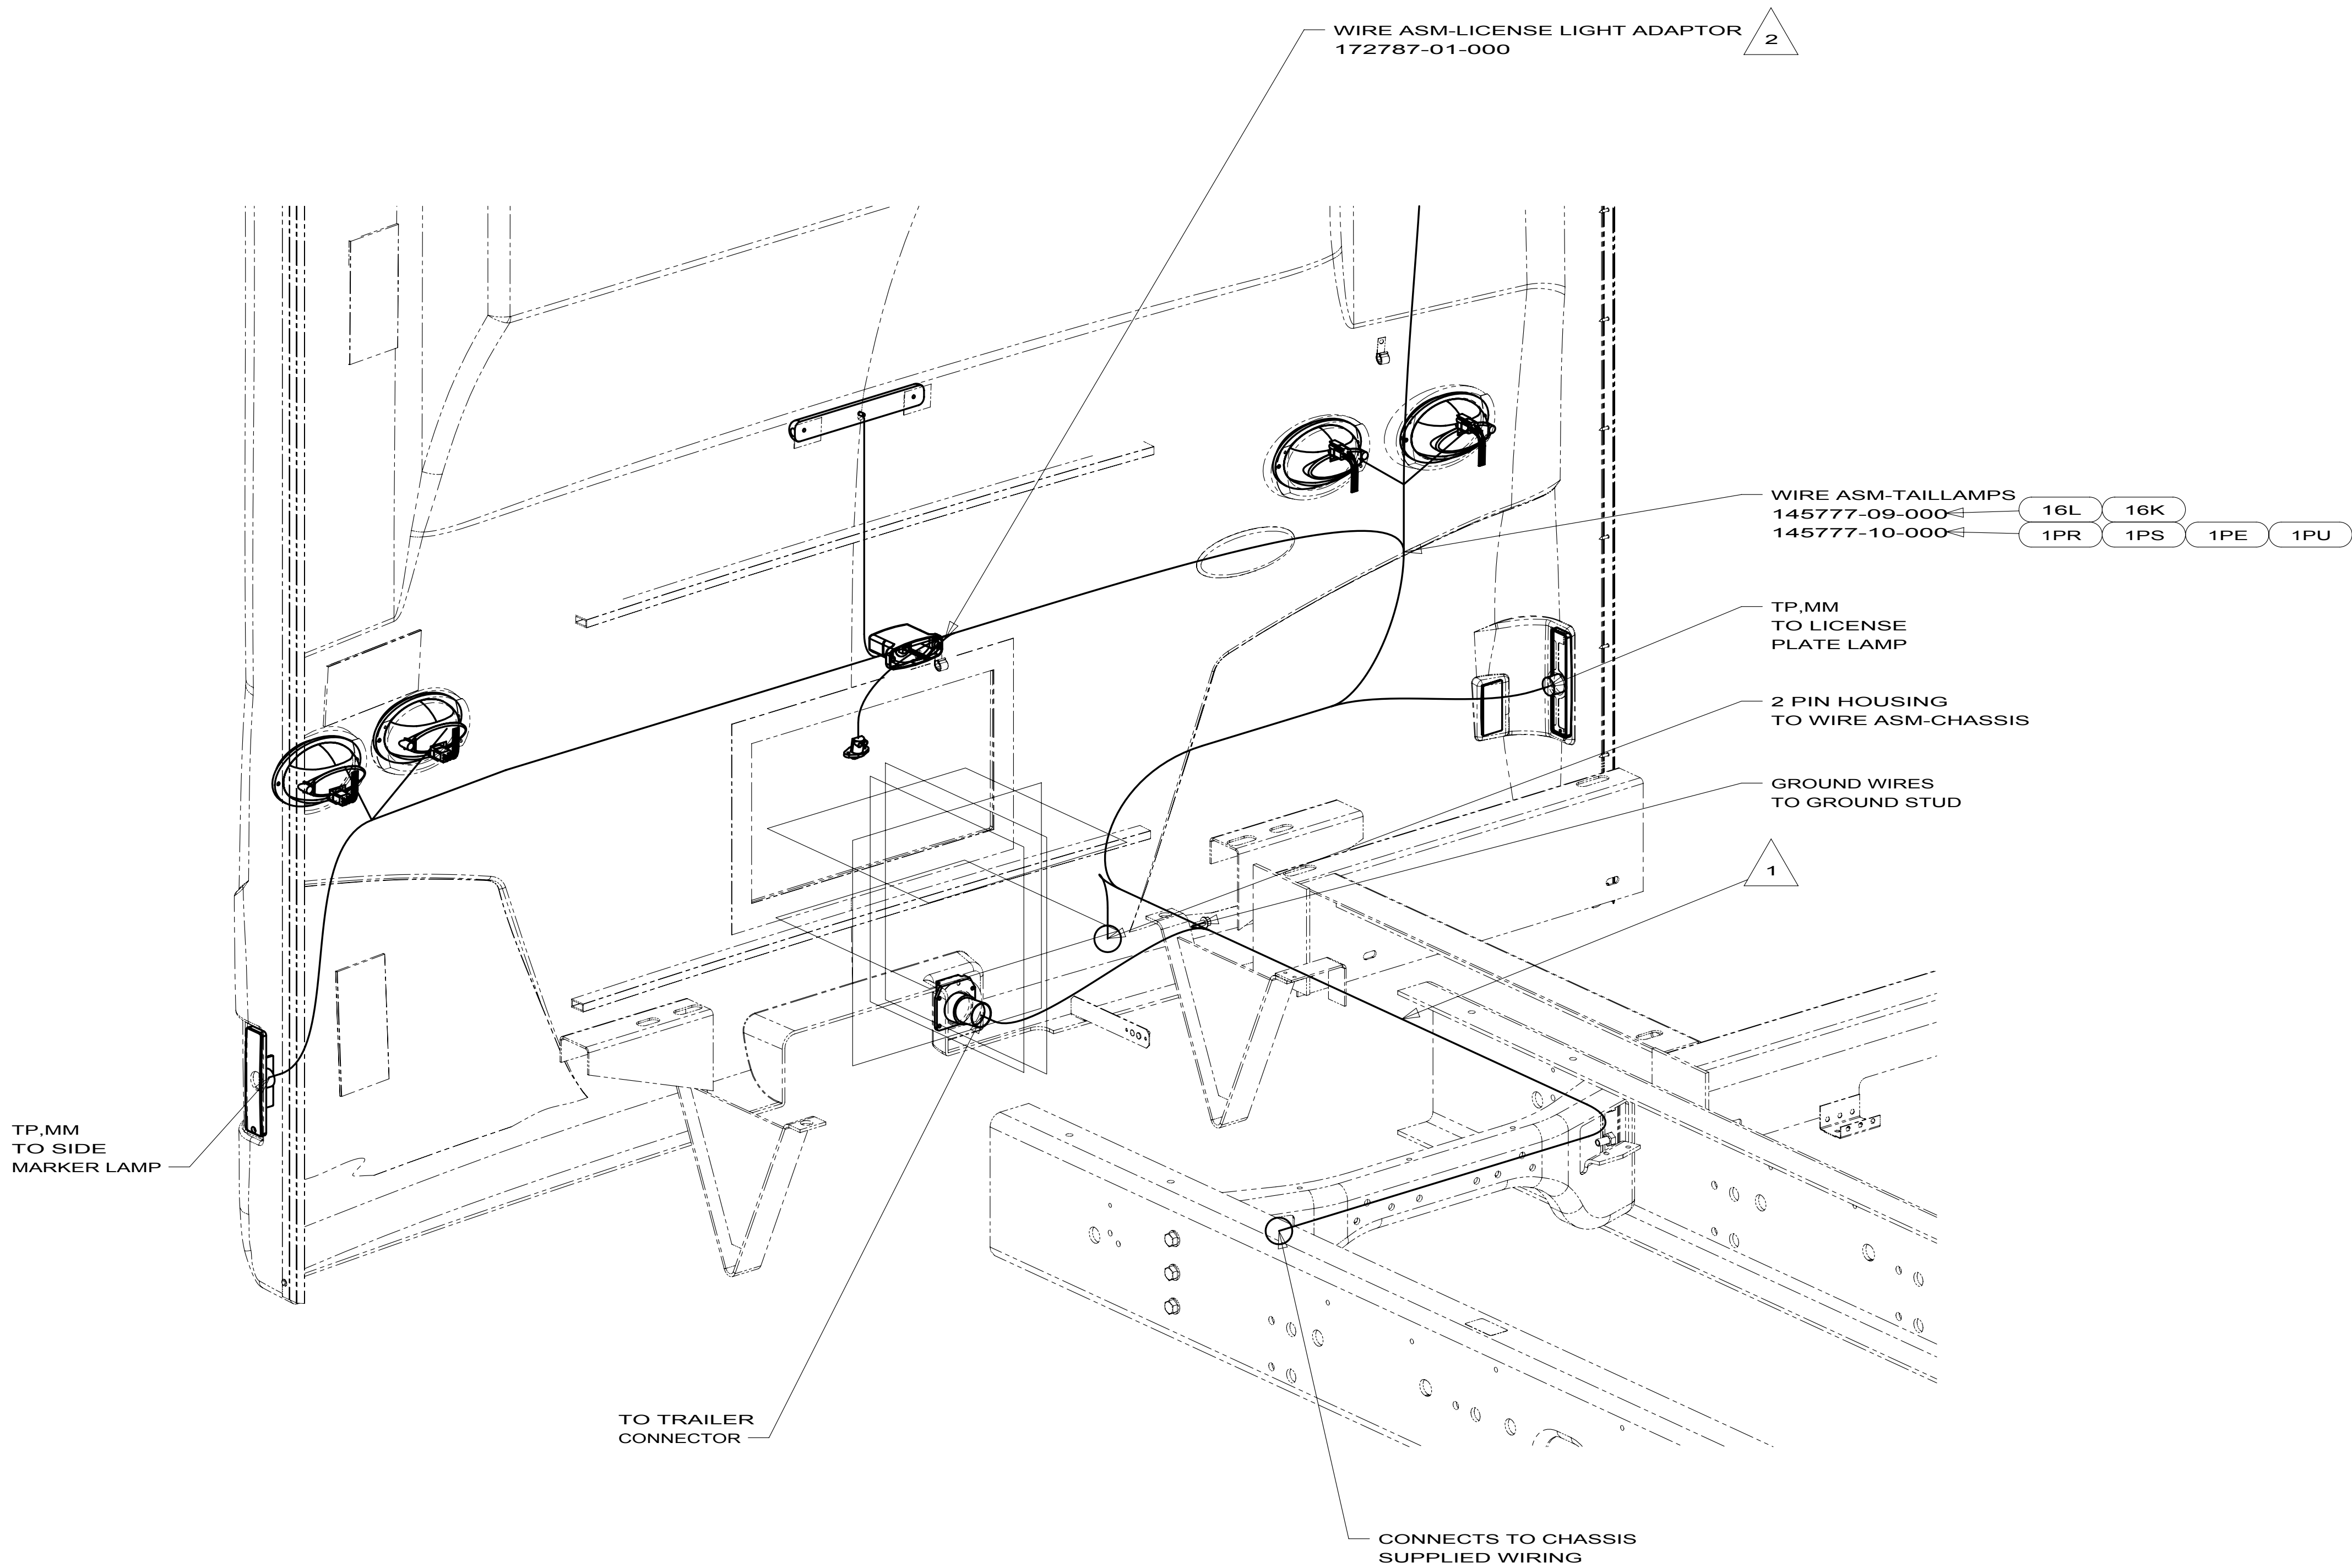

2 USED ON D33C ONLY.

1 WIRE TIE 8343-02. FASTEN TO FRAME AT LEAST ONCE EVERY 600MM.

NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1PE WORKHORSE 20,500 DSL 230HP
- 1PU WKHRSE 22K 230HP DSL 22.5TIR
- 1PS WORKHORSE 22,000#-22.5 TIRE
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 16K FORD CHASSIS 22,000
- 16L FORD 22,000#-22.5 AL WHL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-EXTERIOR LAMPS		
SHEET 3	PART NO 172085	REV


DRAWING NO.	MODEL	SHEETS
169925-01	D-SERIES	1,2,3,4,9
169925-02	J-SERIES	5,6,7,8,9
169925-03	NOT USED	NOT USED

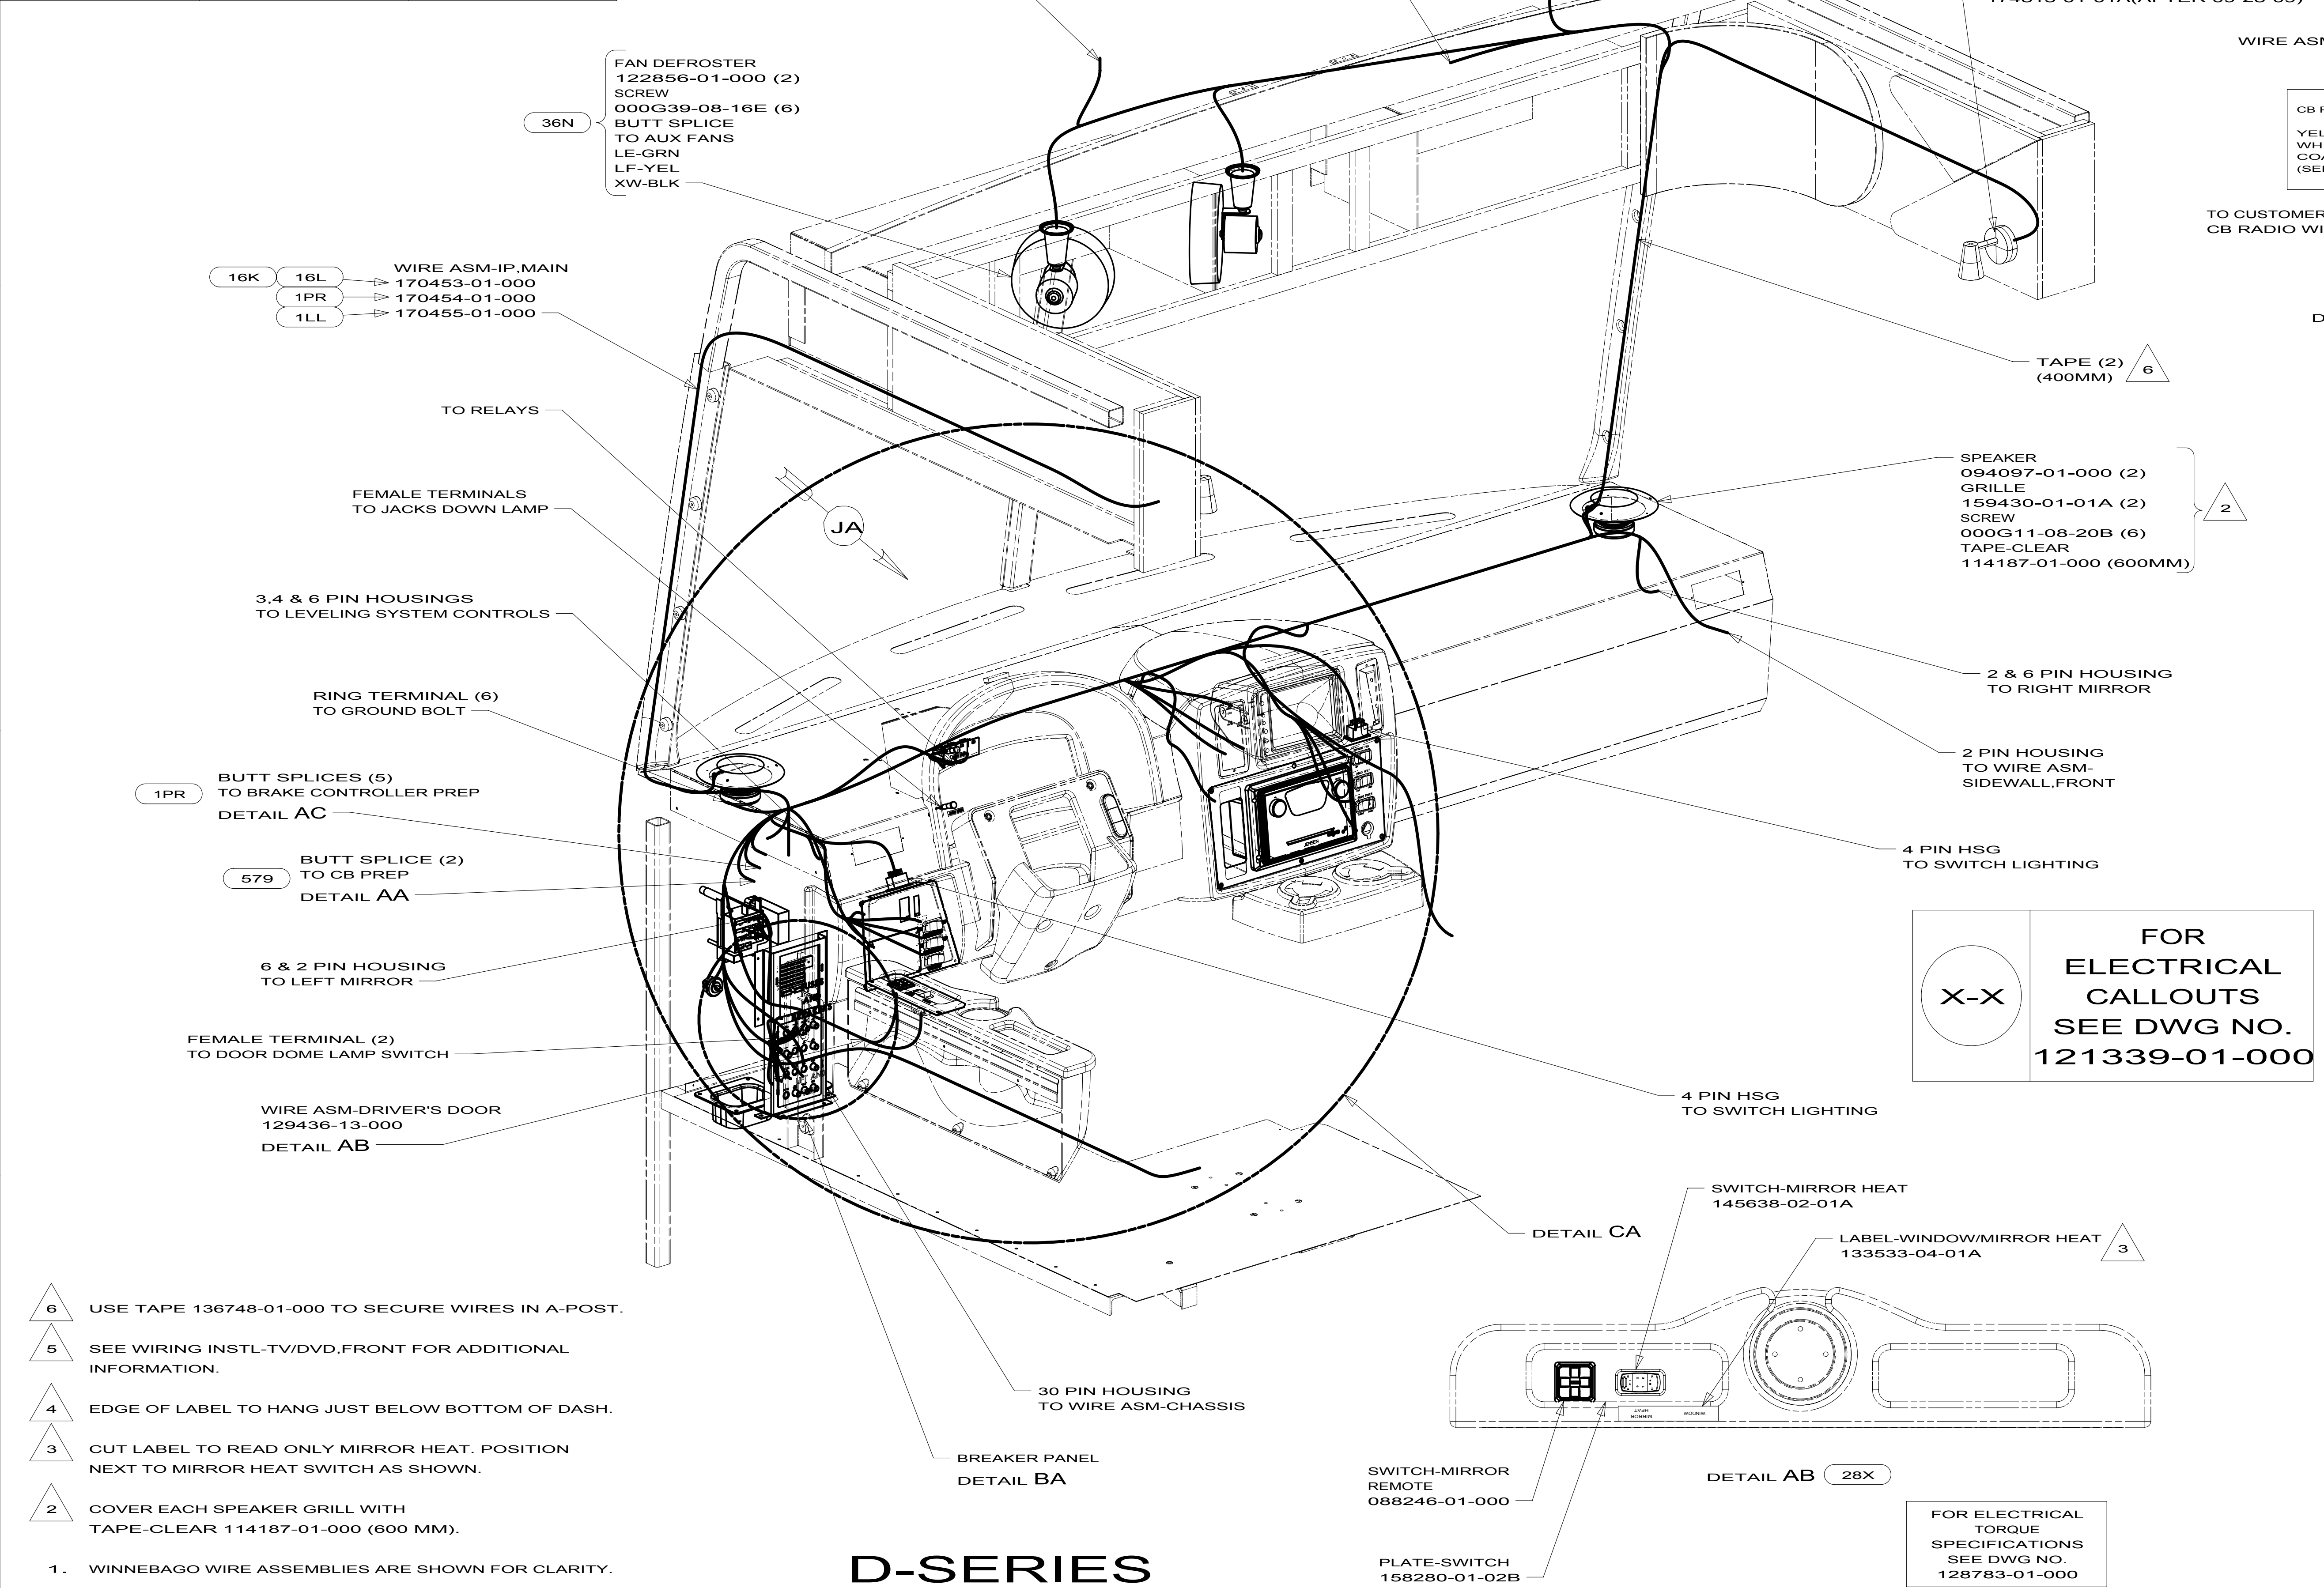

RELEASE	REV	DATE	DWG NO	169925
REV	ZONE	REVISION RECORD	DATE	DFT-ORIG

CB POWER PROVISION
YELLOW +12V
WHITE GROUND
COAX ANTENNA
(SEE REVERSE SIDE ALSO)

WIRE ASM-IP, MAIN

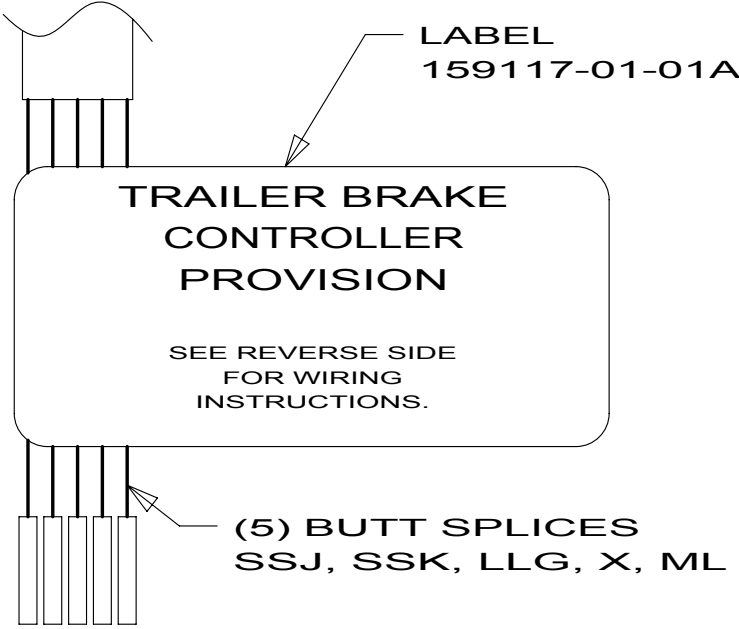

DETAIL AC 1PR

- 64Q SEAT PED-6-WAY POWER DRIVER
- 579 RADIO - CB WIRE PREP
- 36N FANS-DEFROSTER, AUXILIARY
- 12L DOOR-DRIVER
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 1LL FRTL(FRED) 27,000#-22.5 TIRE
- 16L FORD 22,000#-22.5 AL WHL
- 16K FORD CHASSIS 22,000
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


1B1 265


WINNEBAGO INDUSTRIES	COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.
DFT-ORIG	ORIG. DATE
CHGR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	FIRST USED
M.E.	10 D,J,K-SER
DSNR	UNSPECIFIED TOLERANCES ARE:
	WHOLE DIM (X) ± 3
	ONE-PLACE (X.X) ± 1.5
	TWO-PLACE (X.XX) ± 0.50
	ANGLE ± 1°
	THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

TITLE:	WIRING INSTL-FRONT END
SHEET 1 OF 9	PART NO 169925
REF:	1


2/18/2010

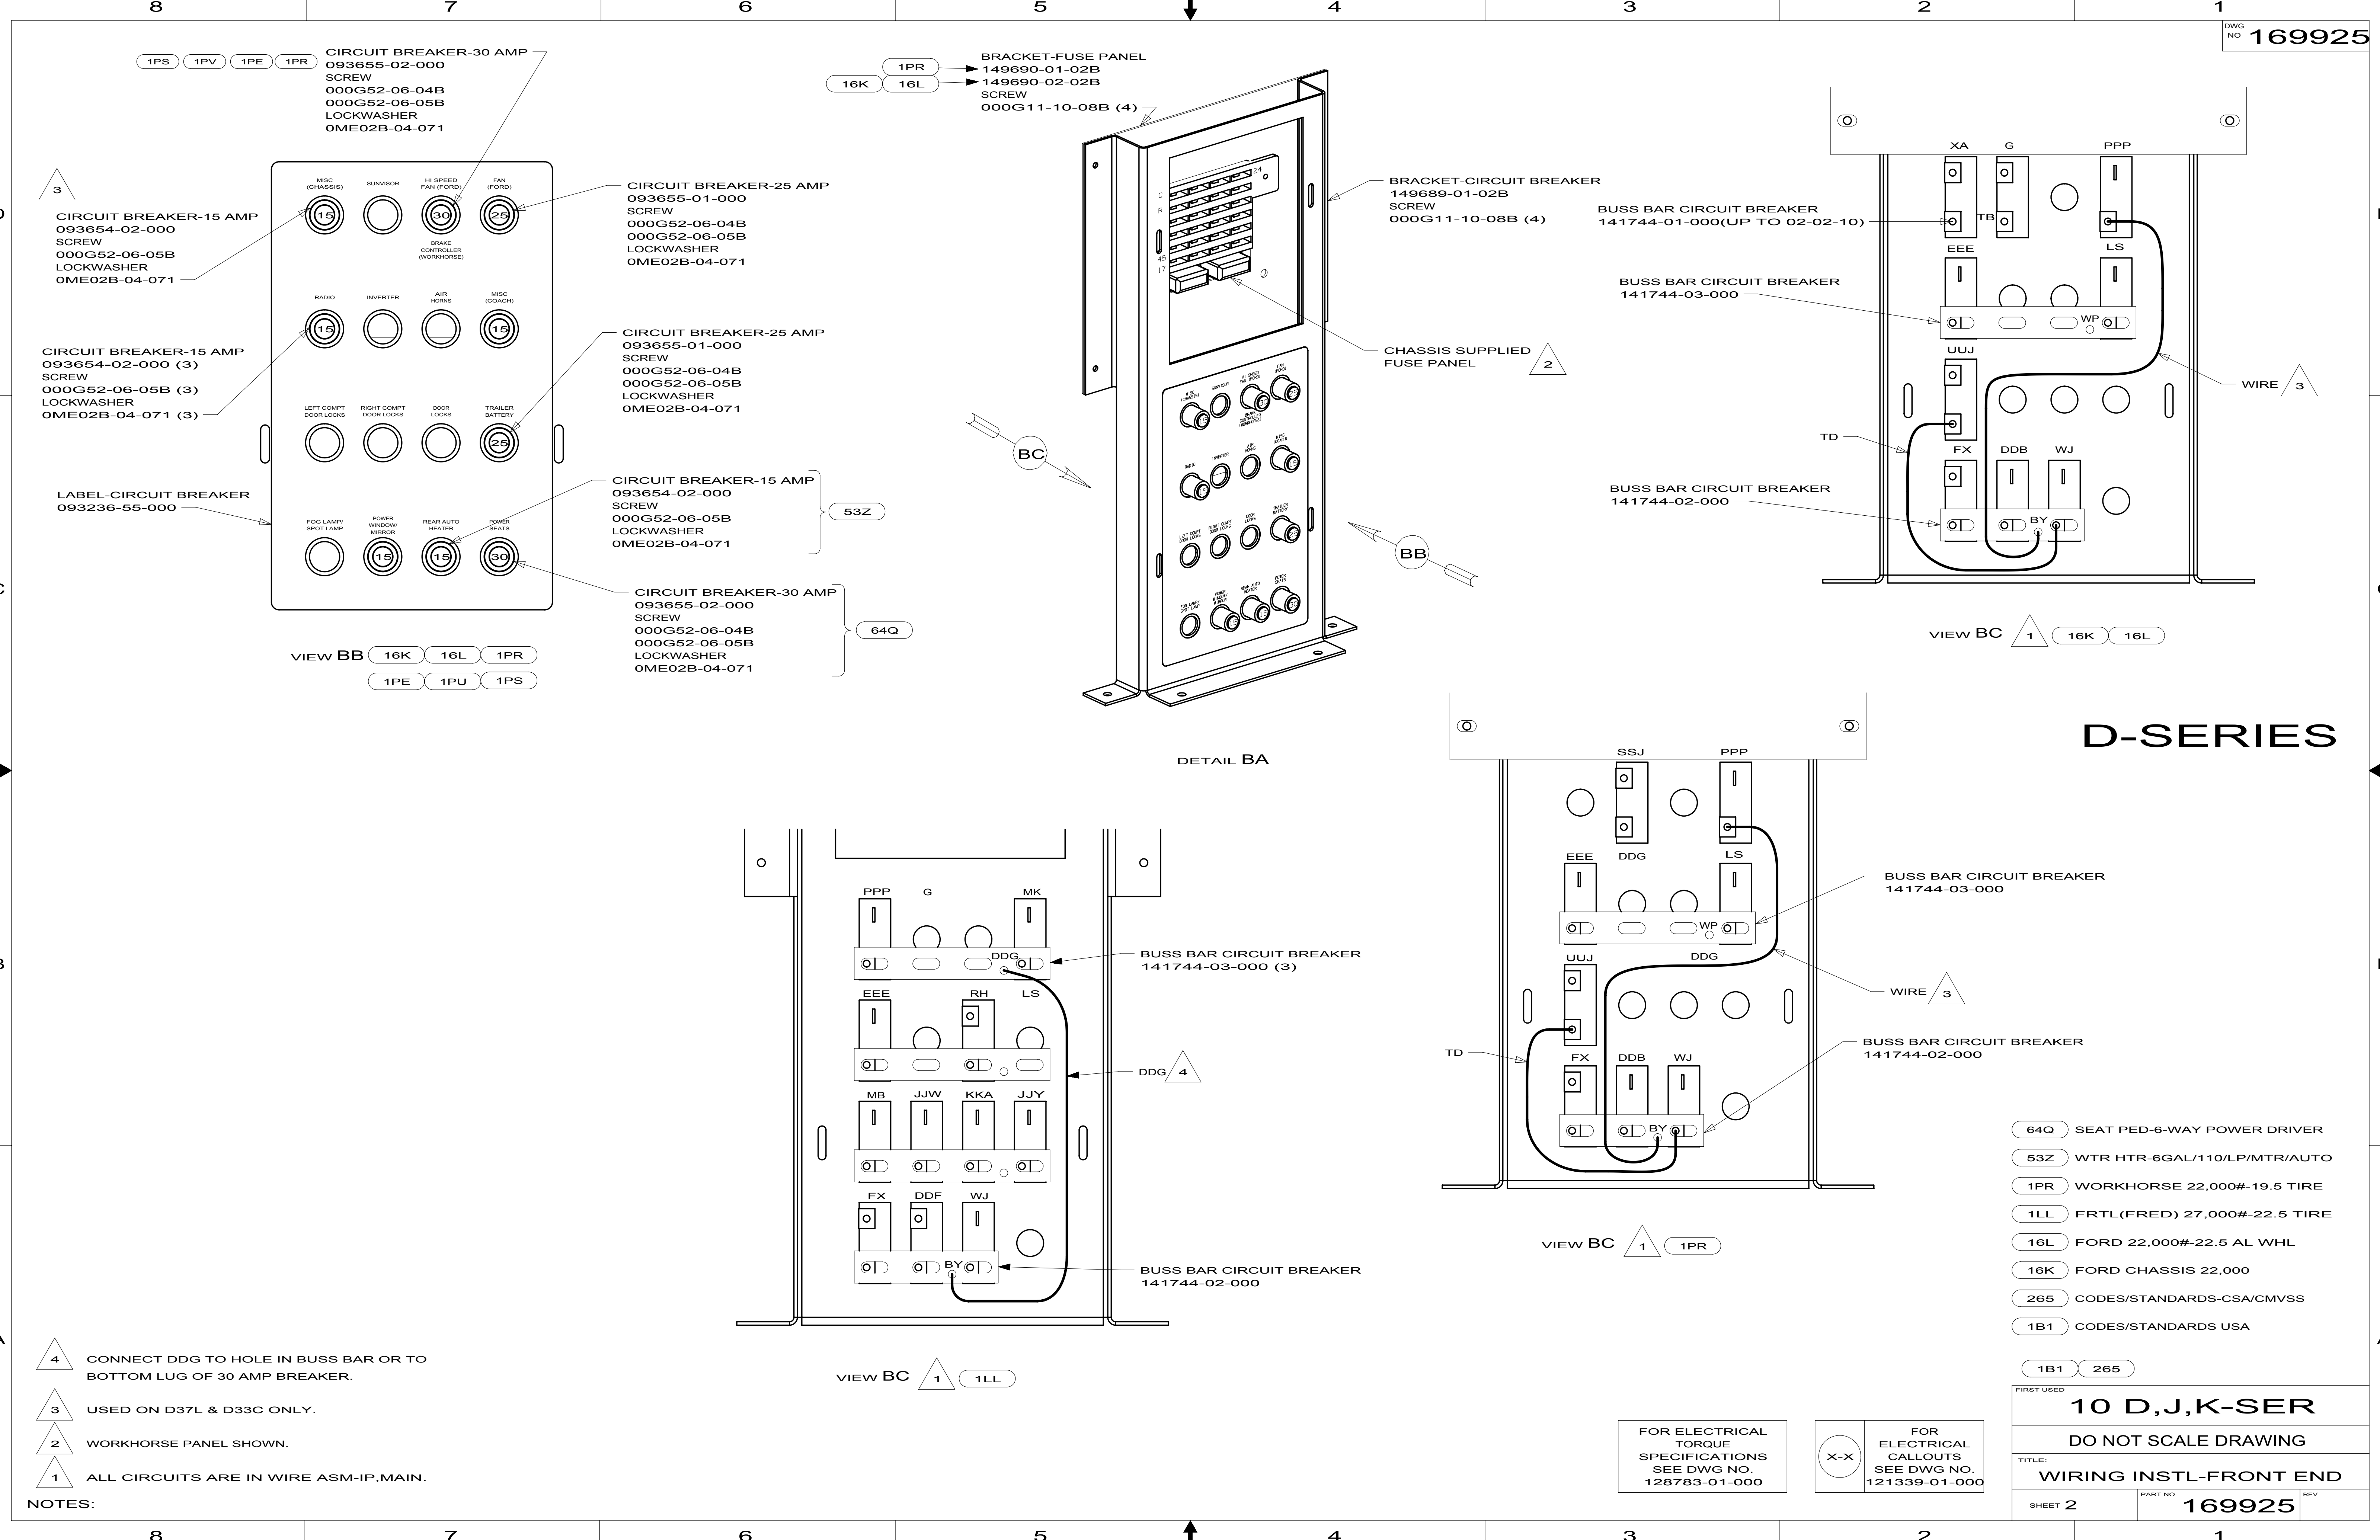

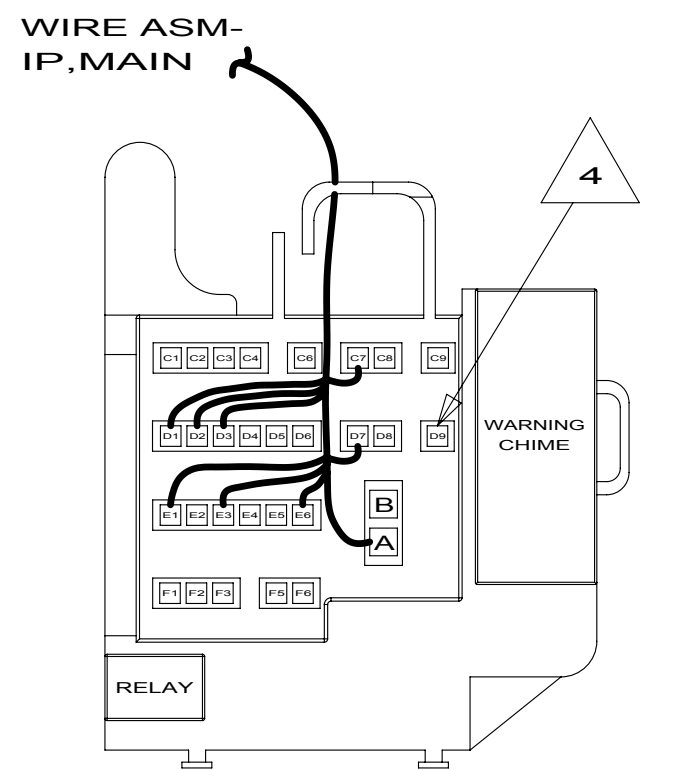

VIEW CB
COURTESY CENTER
(CHASSIS SUPPLIED) 1PR

D-SERIES

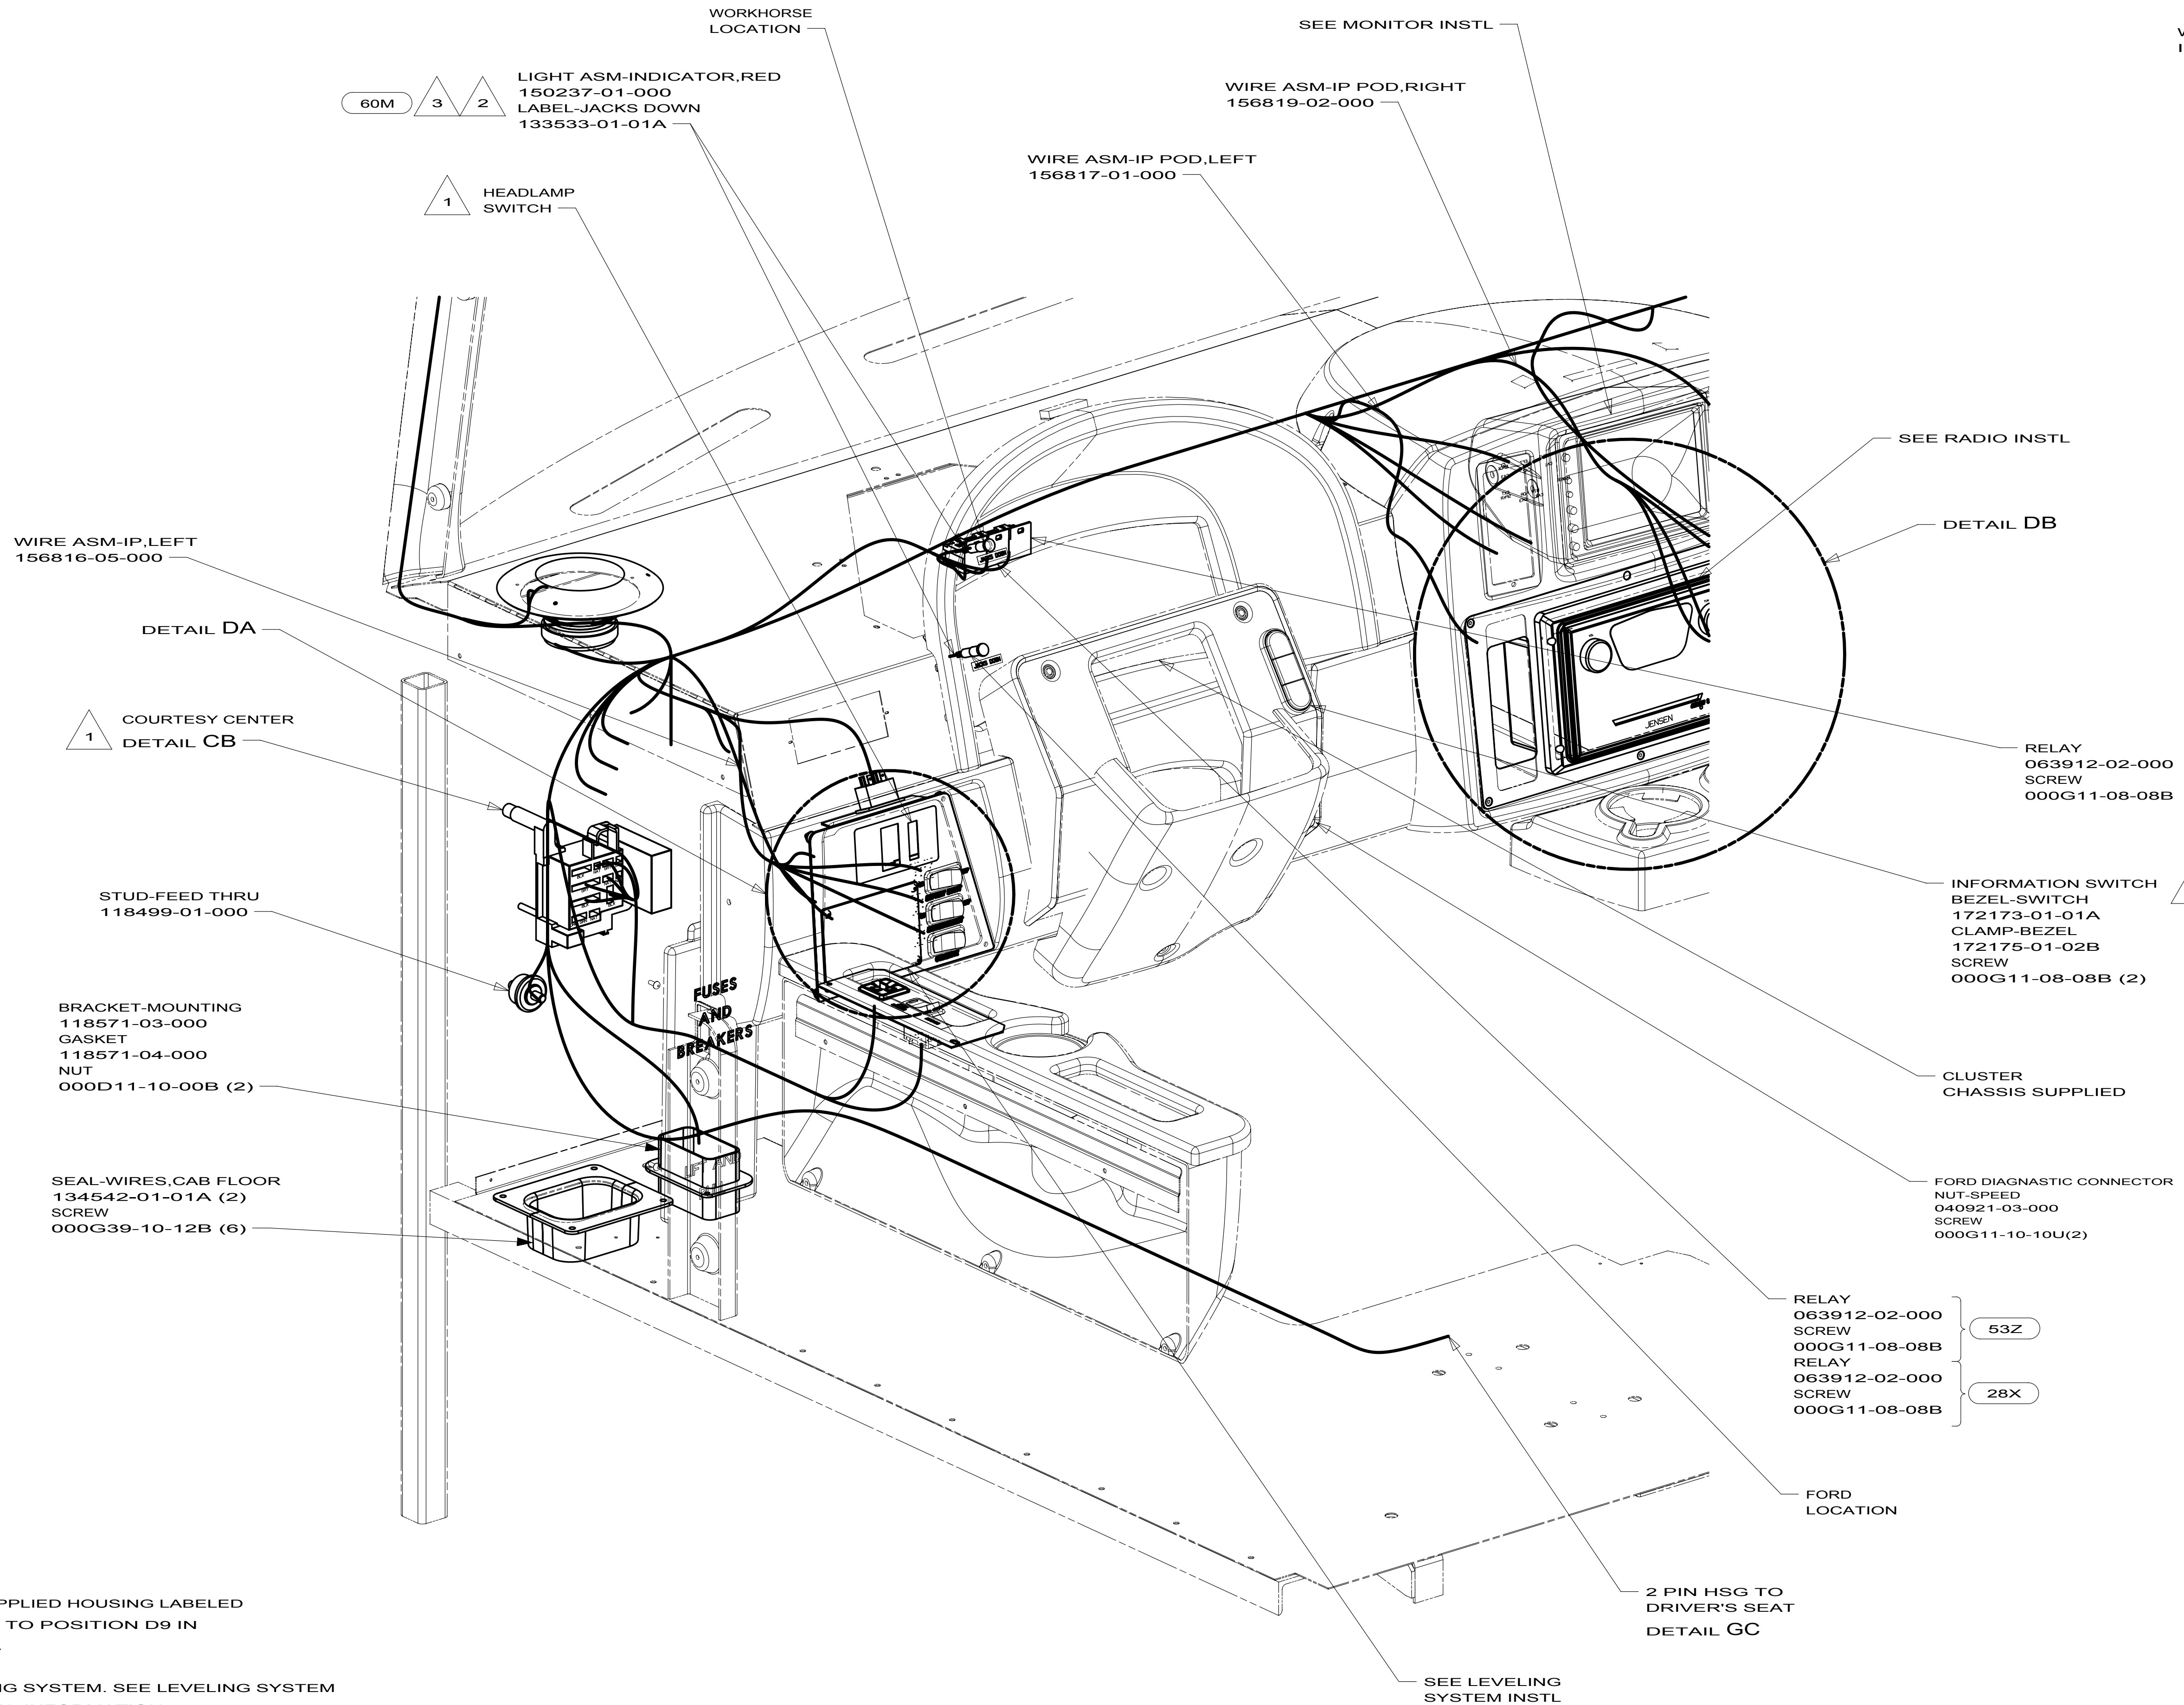


- NOTES:
- 5 2009 FORD CHASSIS.
 - 4 CONNECT CHASSIS SUPPLIED HOUSING LABELED "SEAT BELT BYPASS" TO POSITION D9 IN CONVENIENCE CENTER.
 - 3 WIRING FROM LEVELING SYSTEM. SEE LEVELING SYSTEM INSTL. FOR ADDITIONAL INFORMATION
 - 2 CONNECT POSITIVE WIRE TO TERMINAL MARKED WITH A "+".
 - 1 CHASSIS SUPPLIED

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 60M HYDRAULIC LEVEL JACKS-AUTO
- 53Z WTR HTR-6GAL/110/LP/MTR/AUTO
- 28X MIRRORS-EXTERIOR W/DEFROST
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D,J,K-SER		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 3	PART NO 169925	REV

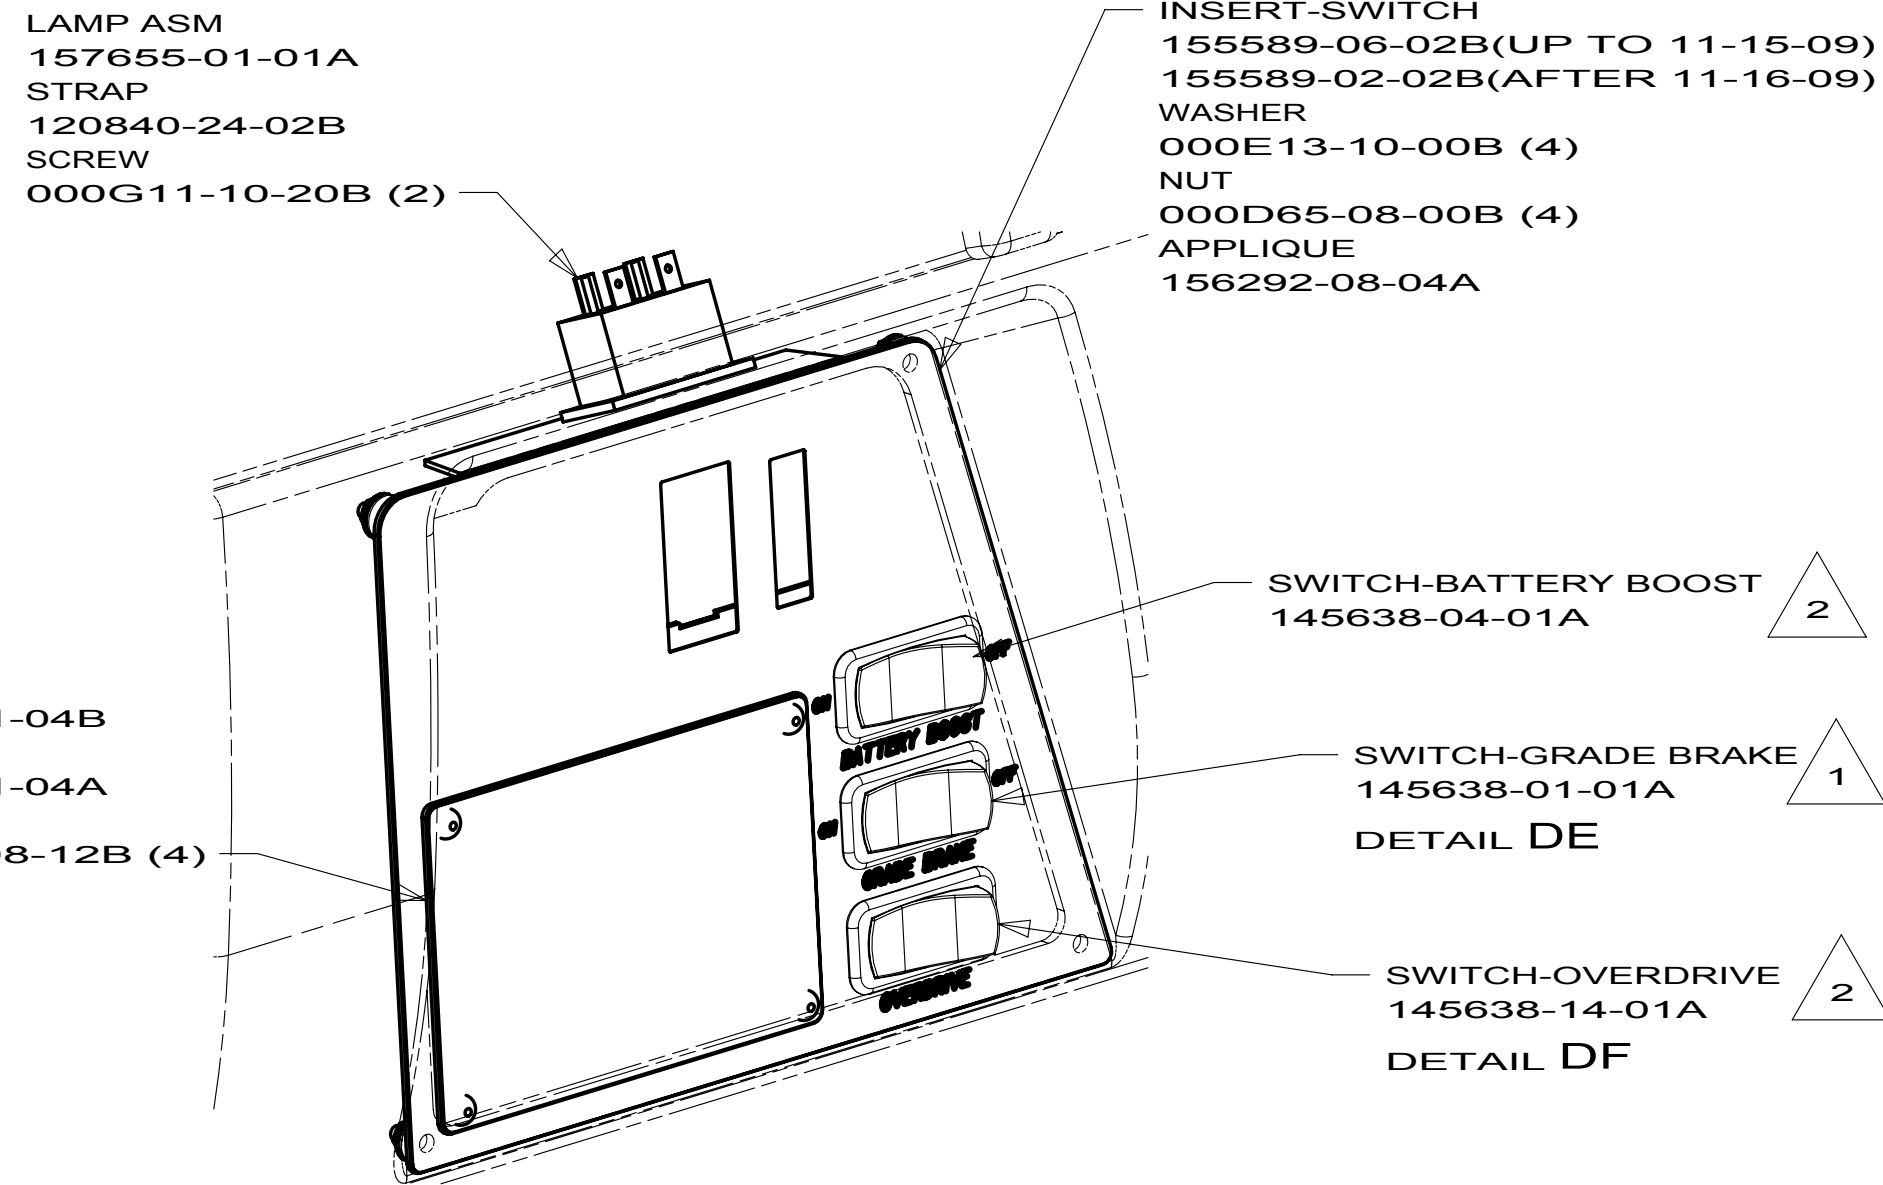

DETAIL DA 1PR

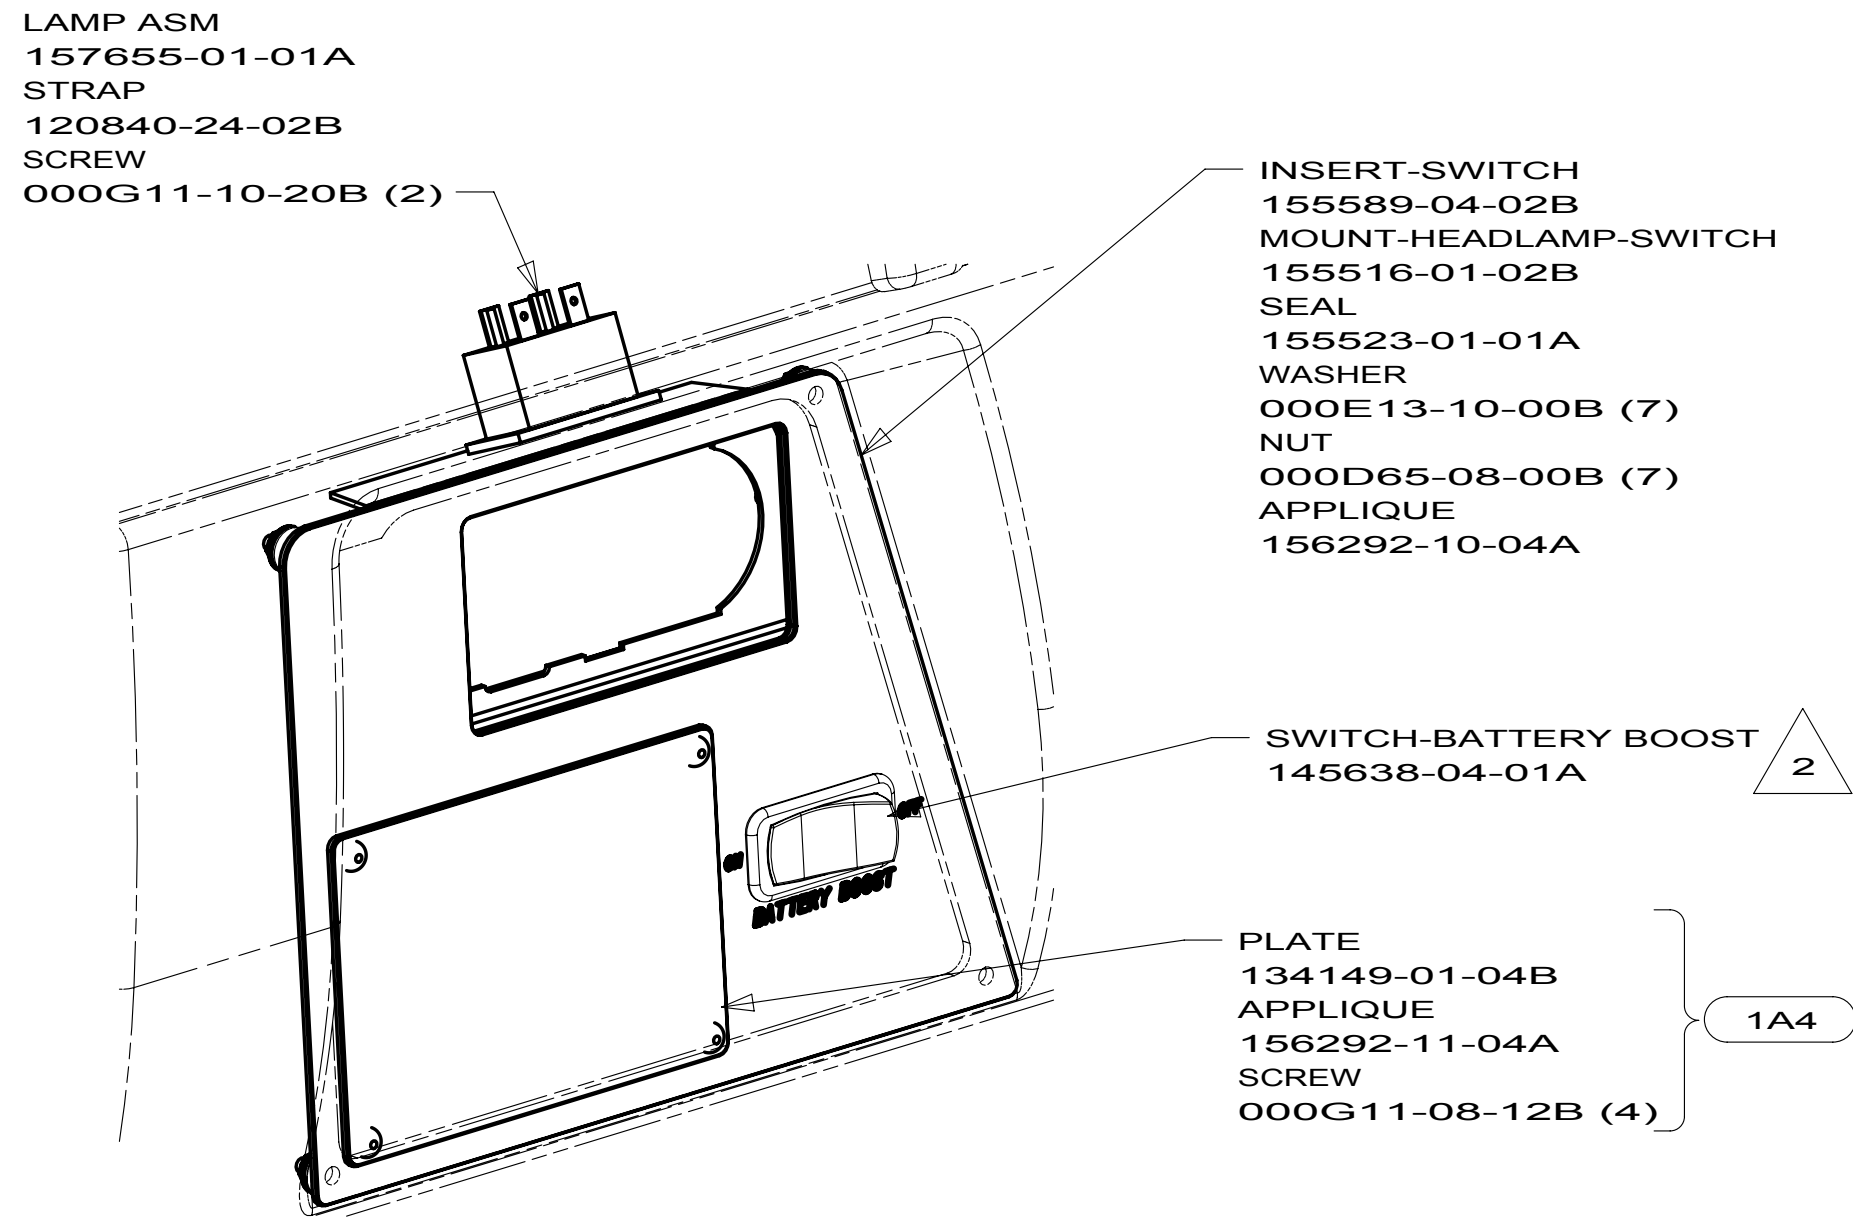

DETAIL DA 16L

LAMP ASM
157655-01-01A
STRAP
120840-24-02B
SCREW
000G11-10-20B (2)

SWITCH-BLANK
145754-01-01A

INSERT-SWITCH
155589-06-02B(UP TO 11-15-09)
155589-08-02B(AFTER 11-16-09)
WASHER
000E13-10-00B (4)
NUT
000D65-08-00B (4)
APPLIQUE
156292-21-04A

HEADLAMP-SWITCH
REF
NUT
000D27-08-00B (3)

SWITCH-BATTERY BOOST
145638-04-01A


SWITCH-EXHAUST BRAKE
145638-08-01A
WIRE ASM-EXHAUST BRAKE
157534-02-000

DETAIL DA 1LL

PLATE
134149-01-04B
APPLIQUE
156292-11-04A
SCREW
000G11-08-12B (4)

1A4

D-SERIES

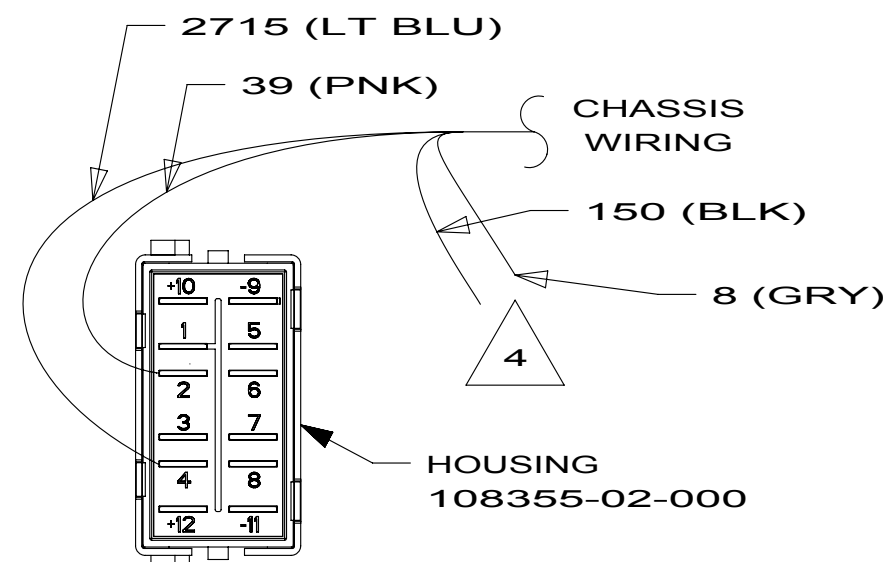

DETAIL DE
(GRADE BRAKE
SWITCH)

HEATER A/C
CONTROLS

SEE RADIO INSTL

SWITCH-DEFROST FAN
145638-03-01A

SWITCH-BLANK
145754-01-01A

36N

3

SWITCH-REAR
AUTO HEATER
145638-03-01A

SWITCH-BLANK
145754-01-01A

53Z

53F

SWITCH-RADIO POWER
145638-07-01A

1

RECEPTACLE-12V
111414-01-000

APPLIQUE-BEZEL
156292-15-04A(UP TO 02-02-10)
156292-27-04A(AFTER 02-03-10)

DETAIL DB

7 WITH SWITCH INSTALLED THIS SIDE
OF SWITCH WILL FACE LEFT SIDEWALL.

6 DETAIL IS LOOKING AT SWITCH FROM
THE BACK SIDE OF SWITCH AS ITS INSTALLED.

5 POSITIONS NOTED IN PARENTHESIS ARE LOCATIONS
IN WORKHORSE SUPPLIED HOUSING.






4 REMOVE TERMINALS & TAPE BACK TO LOOM.

3 WITHOUT 36N

2 SEE DETAIL DC FOR ORIENTATION.

1 SEE DETAIL DD FOR ORIENTATION.

NOTES:

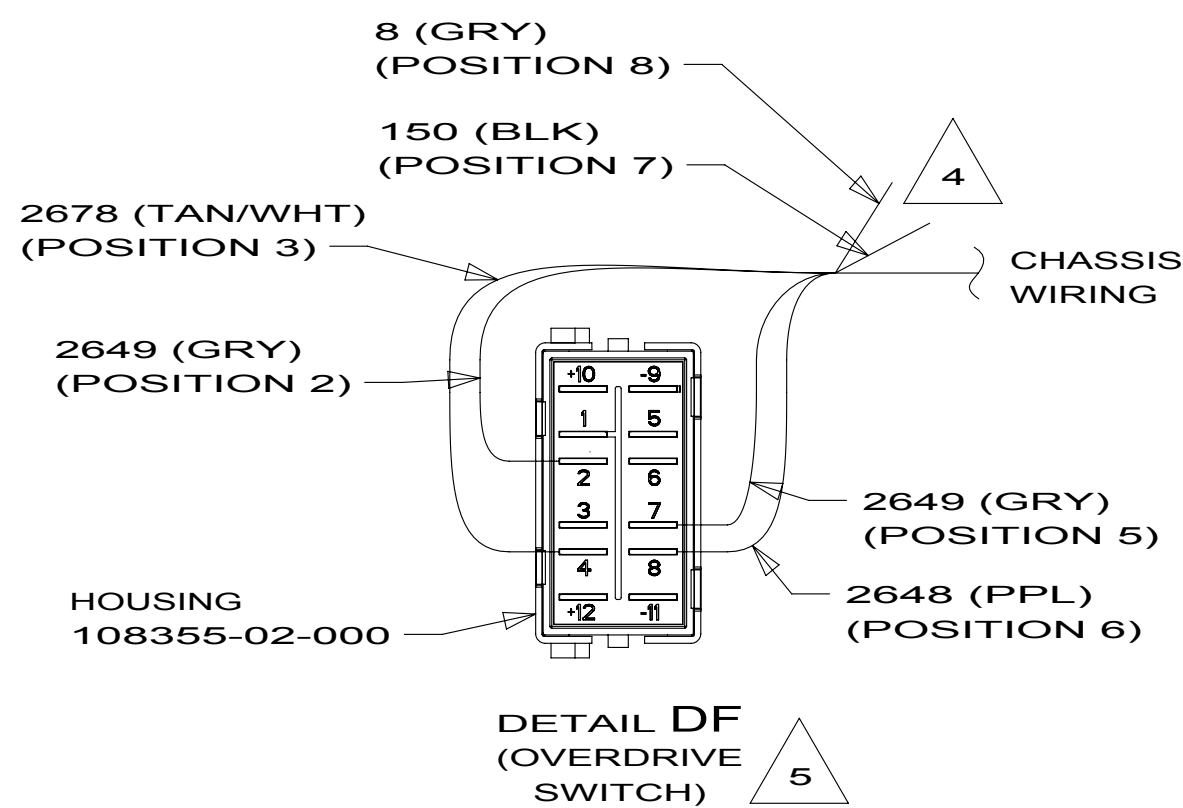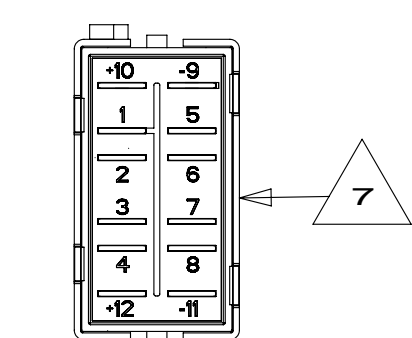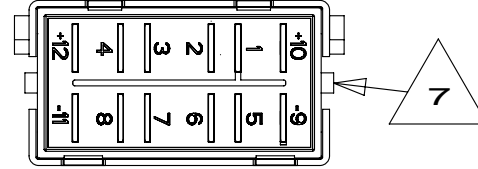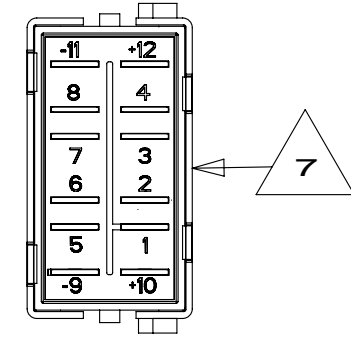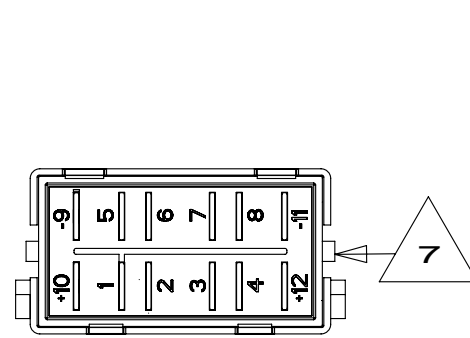

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 53Z WTR HTR-6GAL/110/LP/MTR/AUTO
- 53F WATER HEATER-ELEC. IGNITION
- 36N FANS-DEFROSTER, AUXILIARY
- 1A4 LEVELING JACK WITHOUT
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 1LL FRTL(FRED) 27,000#-22.5 TIRE
- 16L FORD 22,000#-22.5 AL WHL
- 16K FORD CHASSIS 22,000
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

10 D,J,K-SER

DO NOT SCALE DRAWING


TITLE:
WIRING INSTL-FRONT END

SHEET 4

PART NO

169925

REV

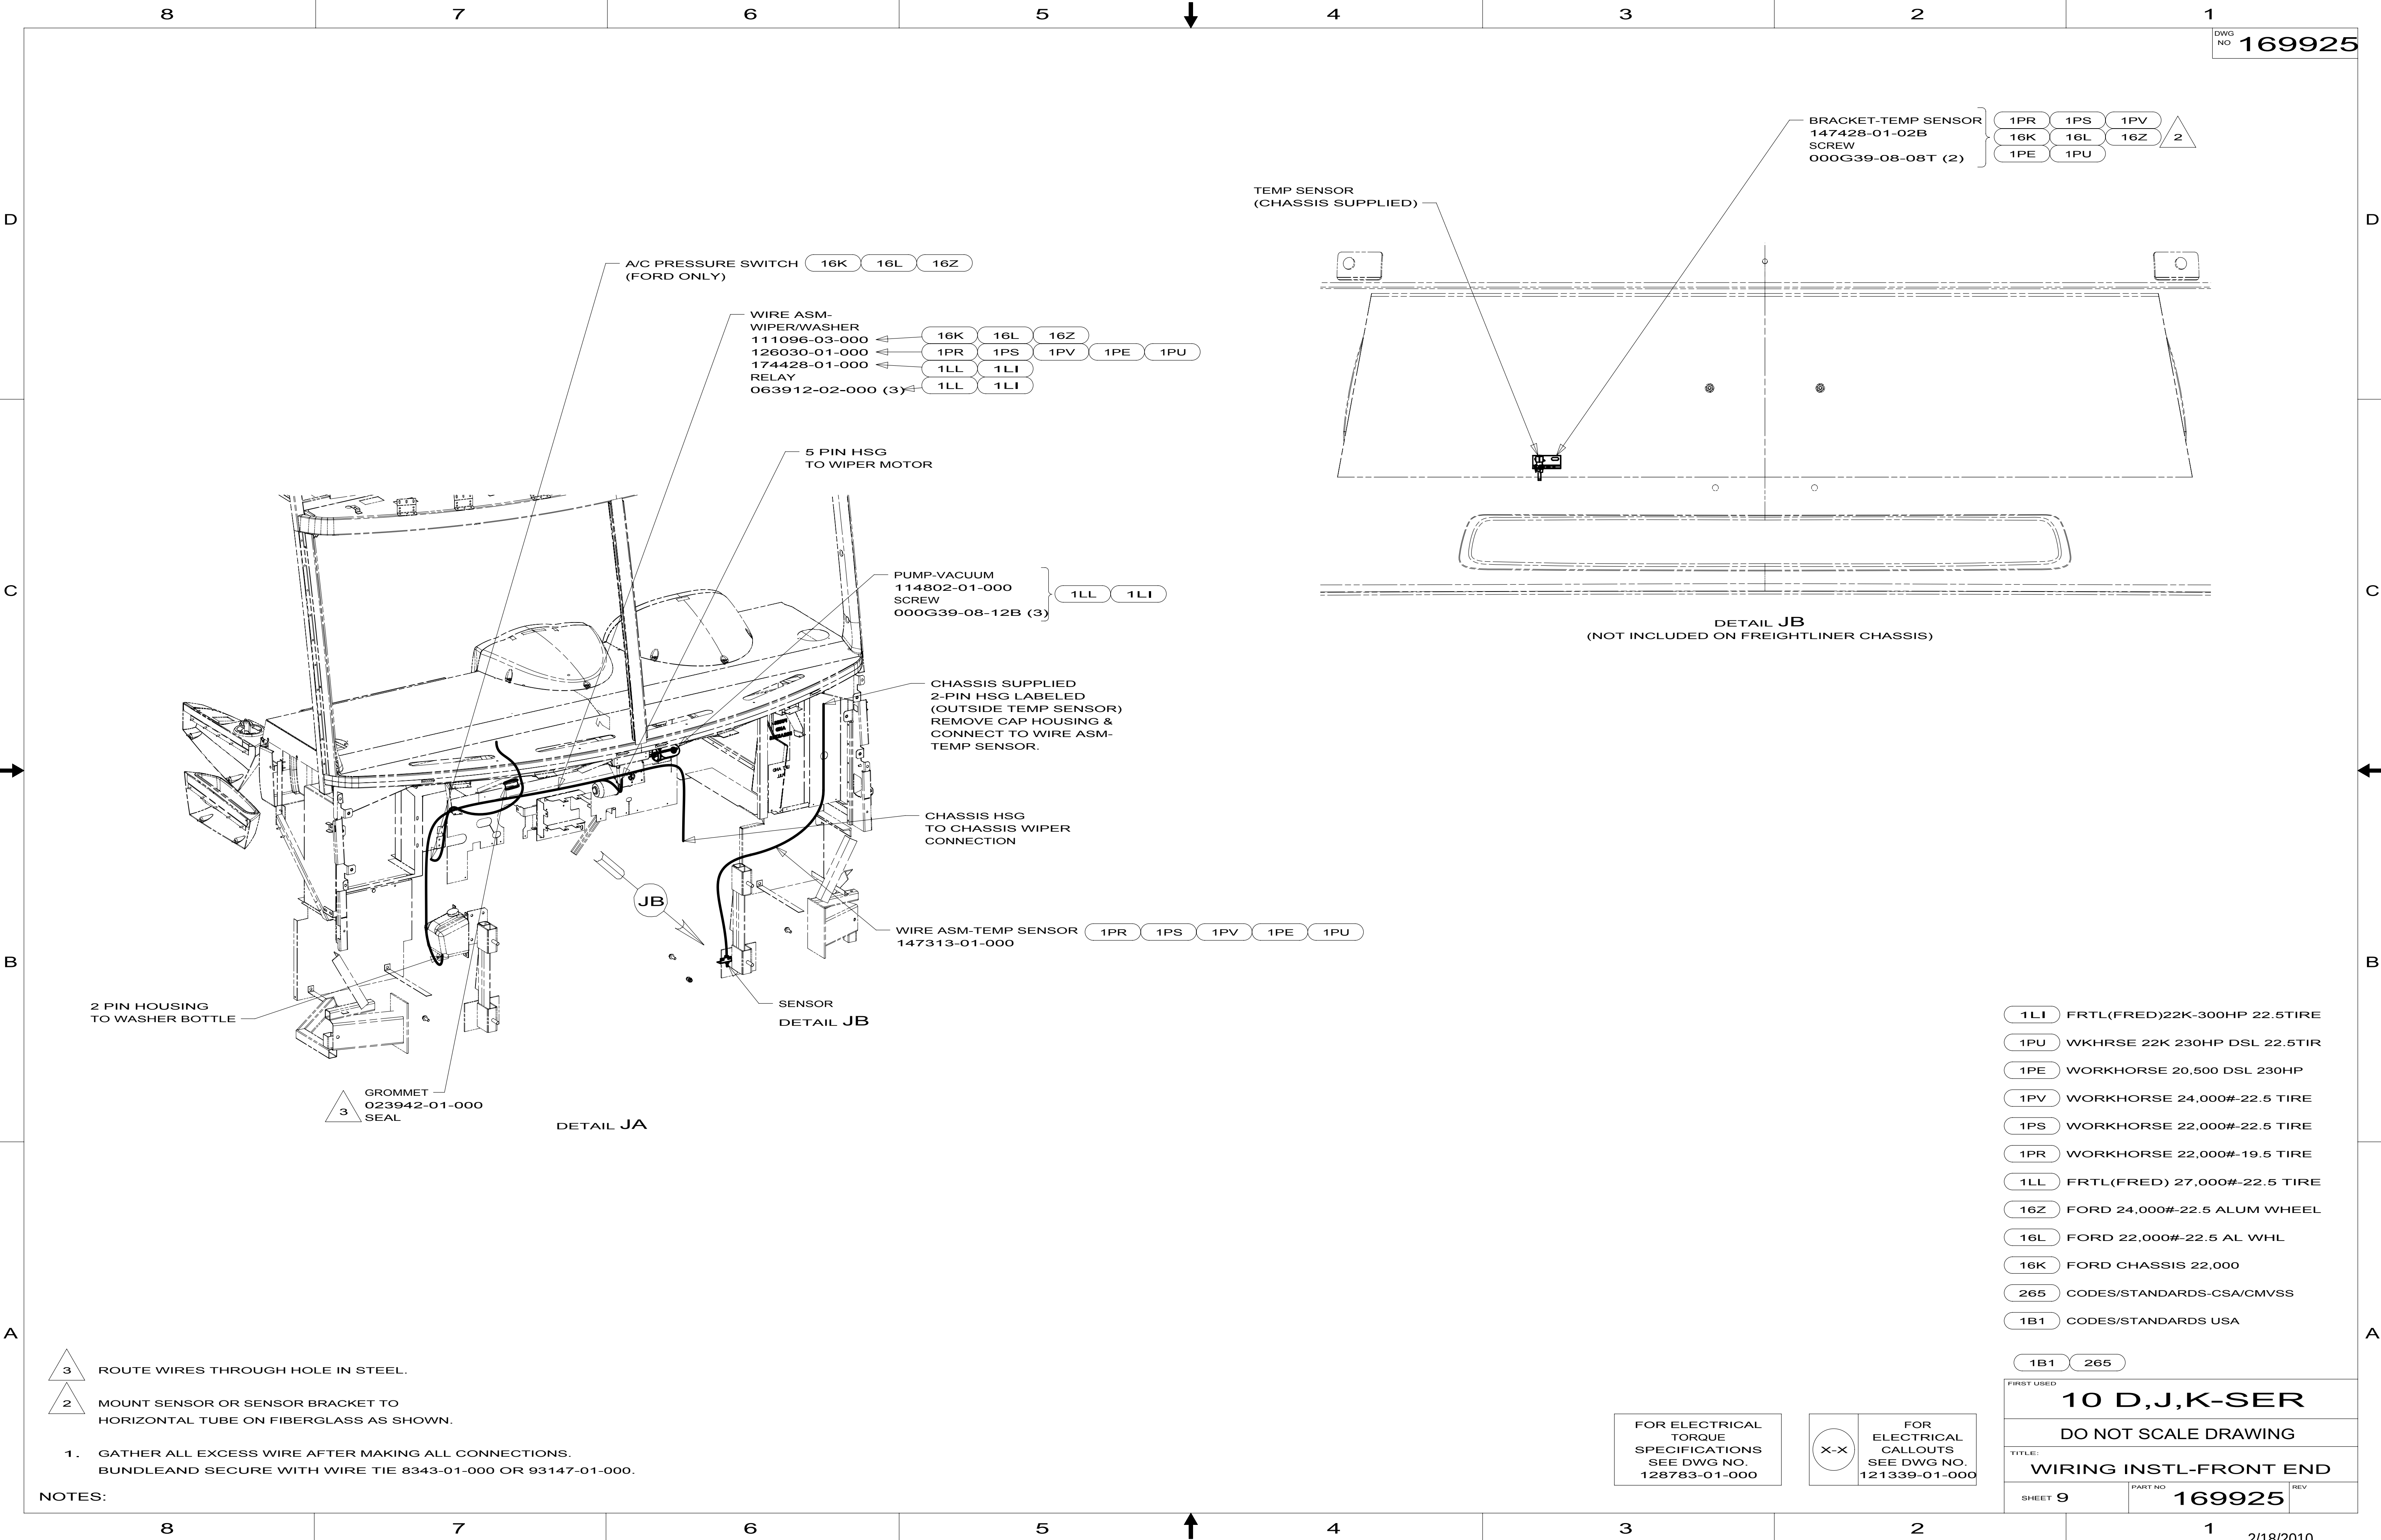

- 3 ROUTE WIRES THROUGH HOLE IN STEEL.
- 2 MOUNT SENSOR OR SENSOR BRACKET TO HORIZONTAL TUBE ON FIBERGLASS AS SHOWN.

- GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS. BUNDLEAND SECURE WITH WIRE TIE 8343-01-000 OR 93147-01-000.





NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1LI FRTL(FRED)22K-300HP 22.5TIRE
- 1PU WKHRSE 22K 230HP DSL 22.5TIR
- 1PE WORKHORSE 20,500 DSL 230HP
- 1PV WORKHORSE 24,000#-22.5 TIRE
- 1PS WORKHORSE 22,000#-22.5 TIRE
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 1LL FRTL(FRED) 27,000#-22.5 TIRE
- 16Z FORD 24,000#-22.5 ALUM WHEEL
- 16L FORD 22,000#-22.5 AL WHL
- 16K FORD CHASSIS 22,000
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D,J,K-SER		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 9	PART NO 169925	REV

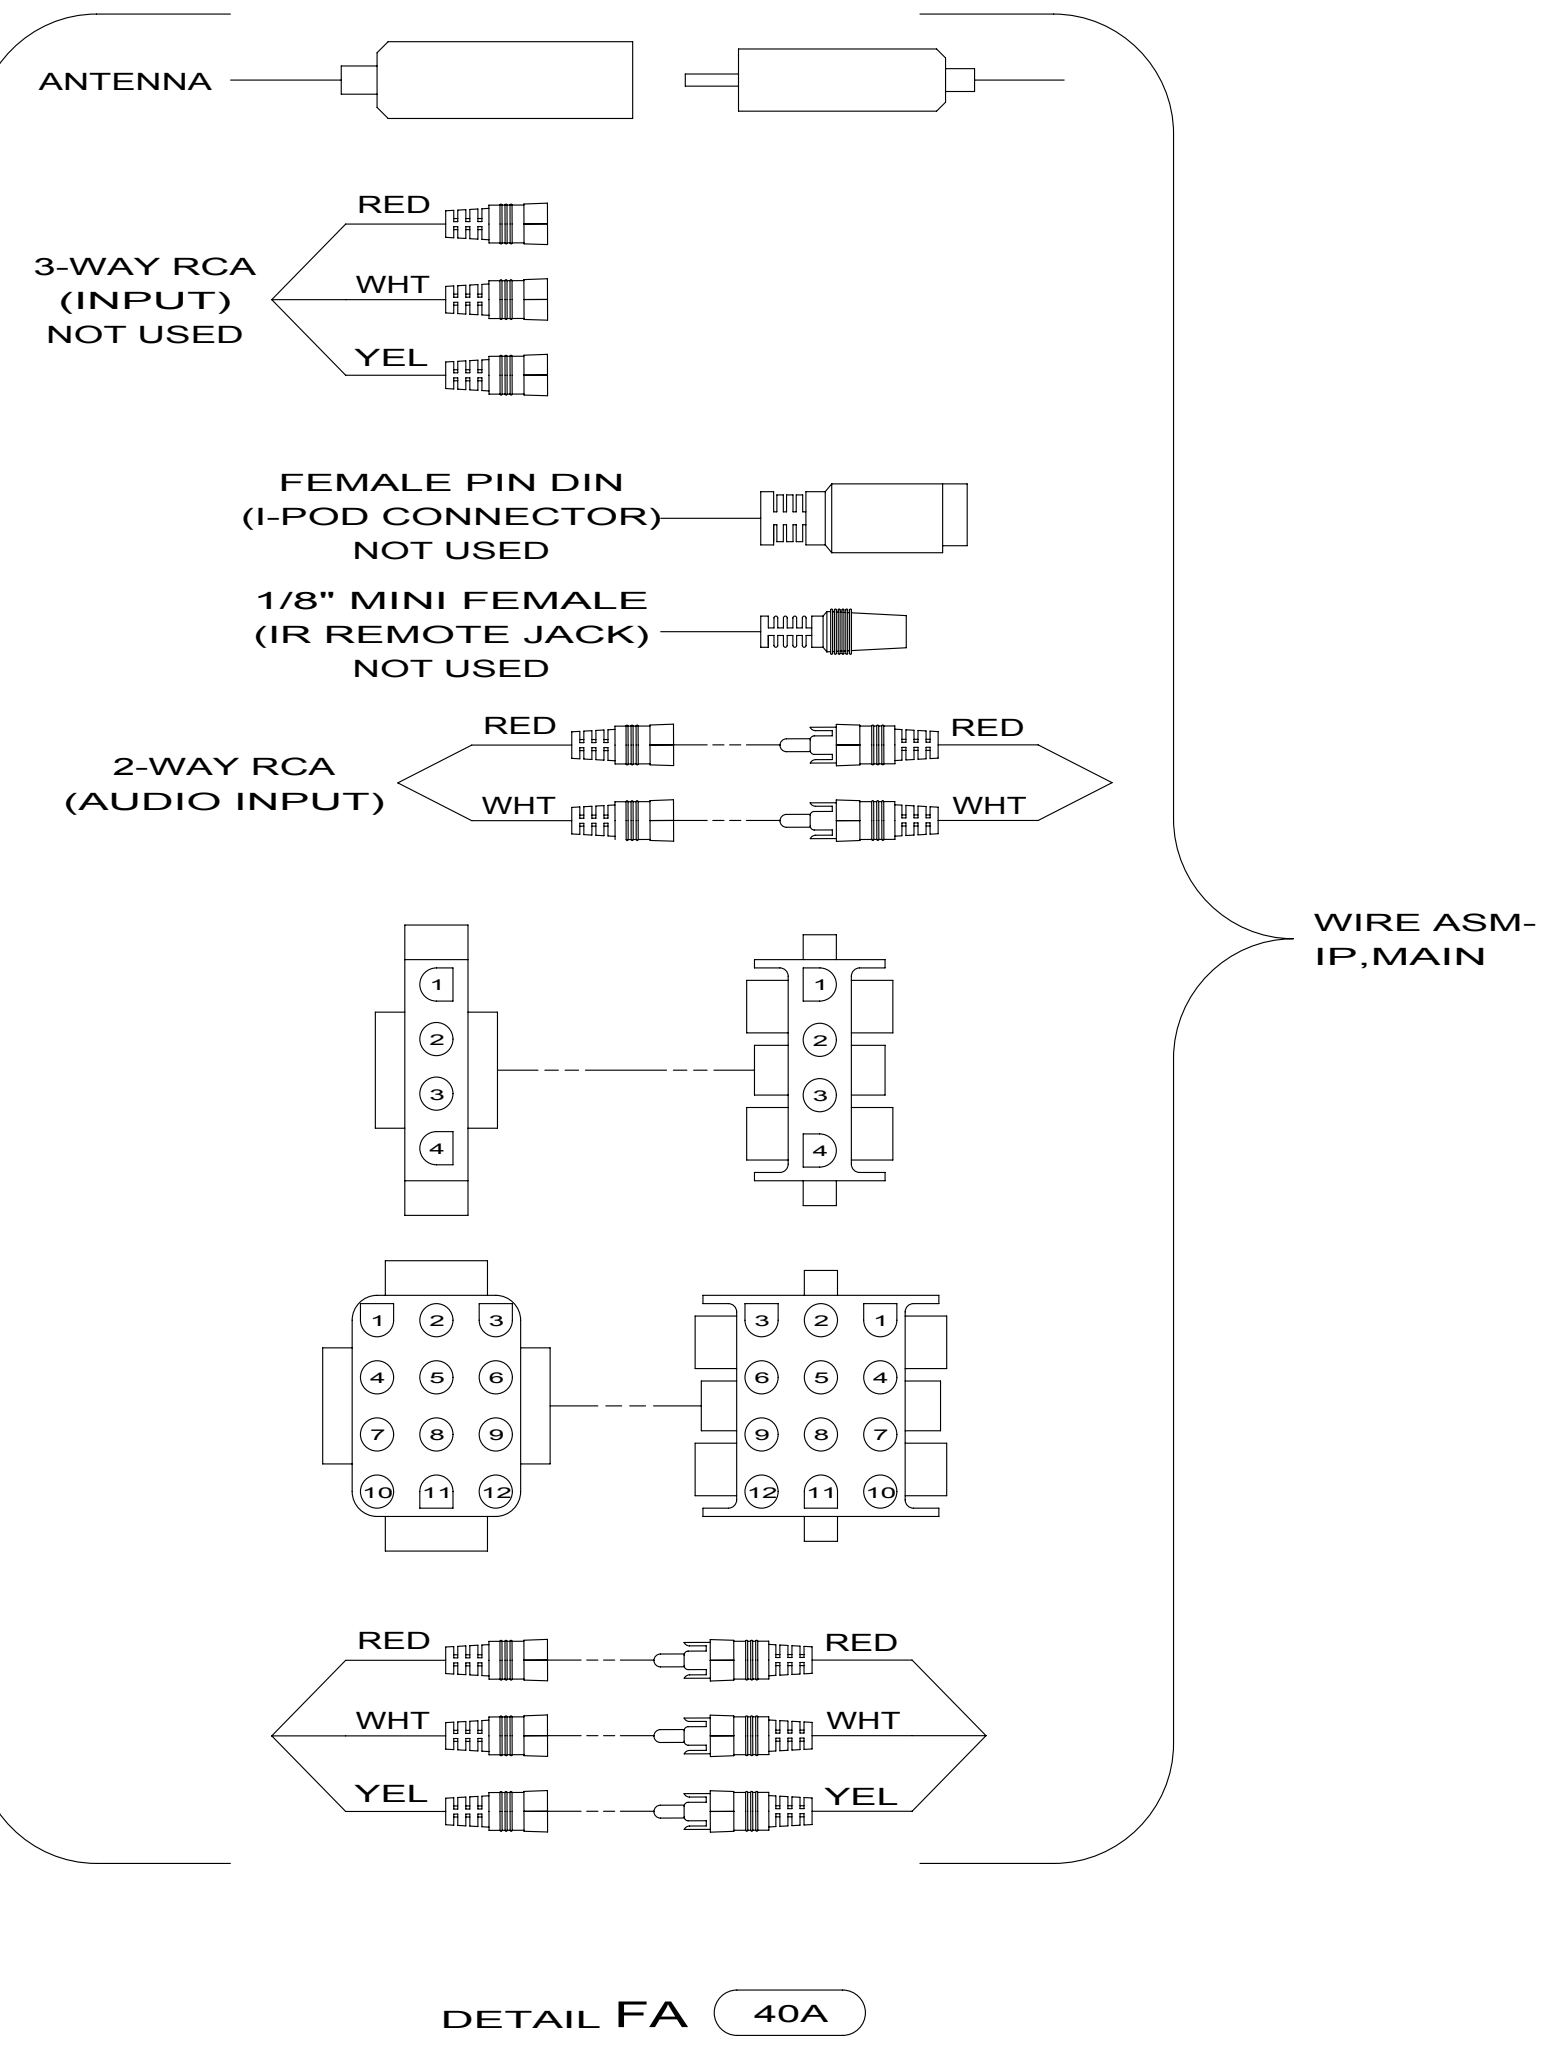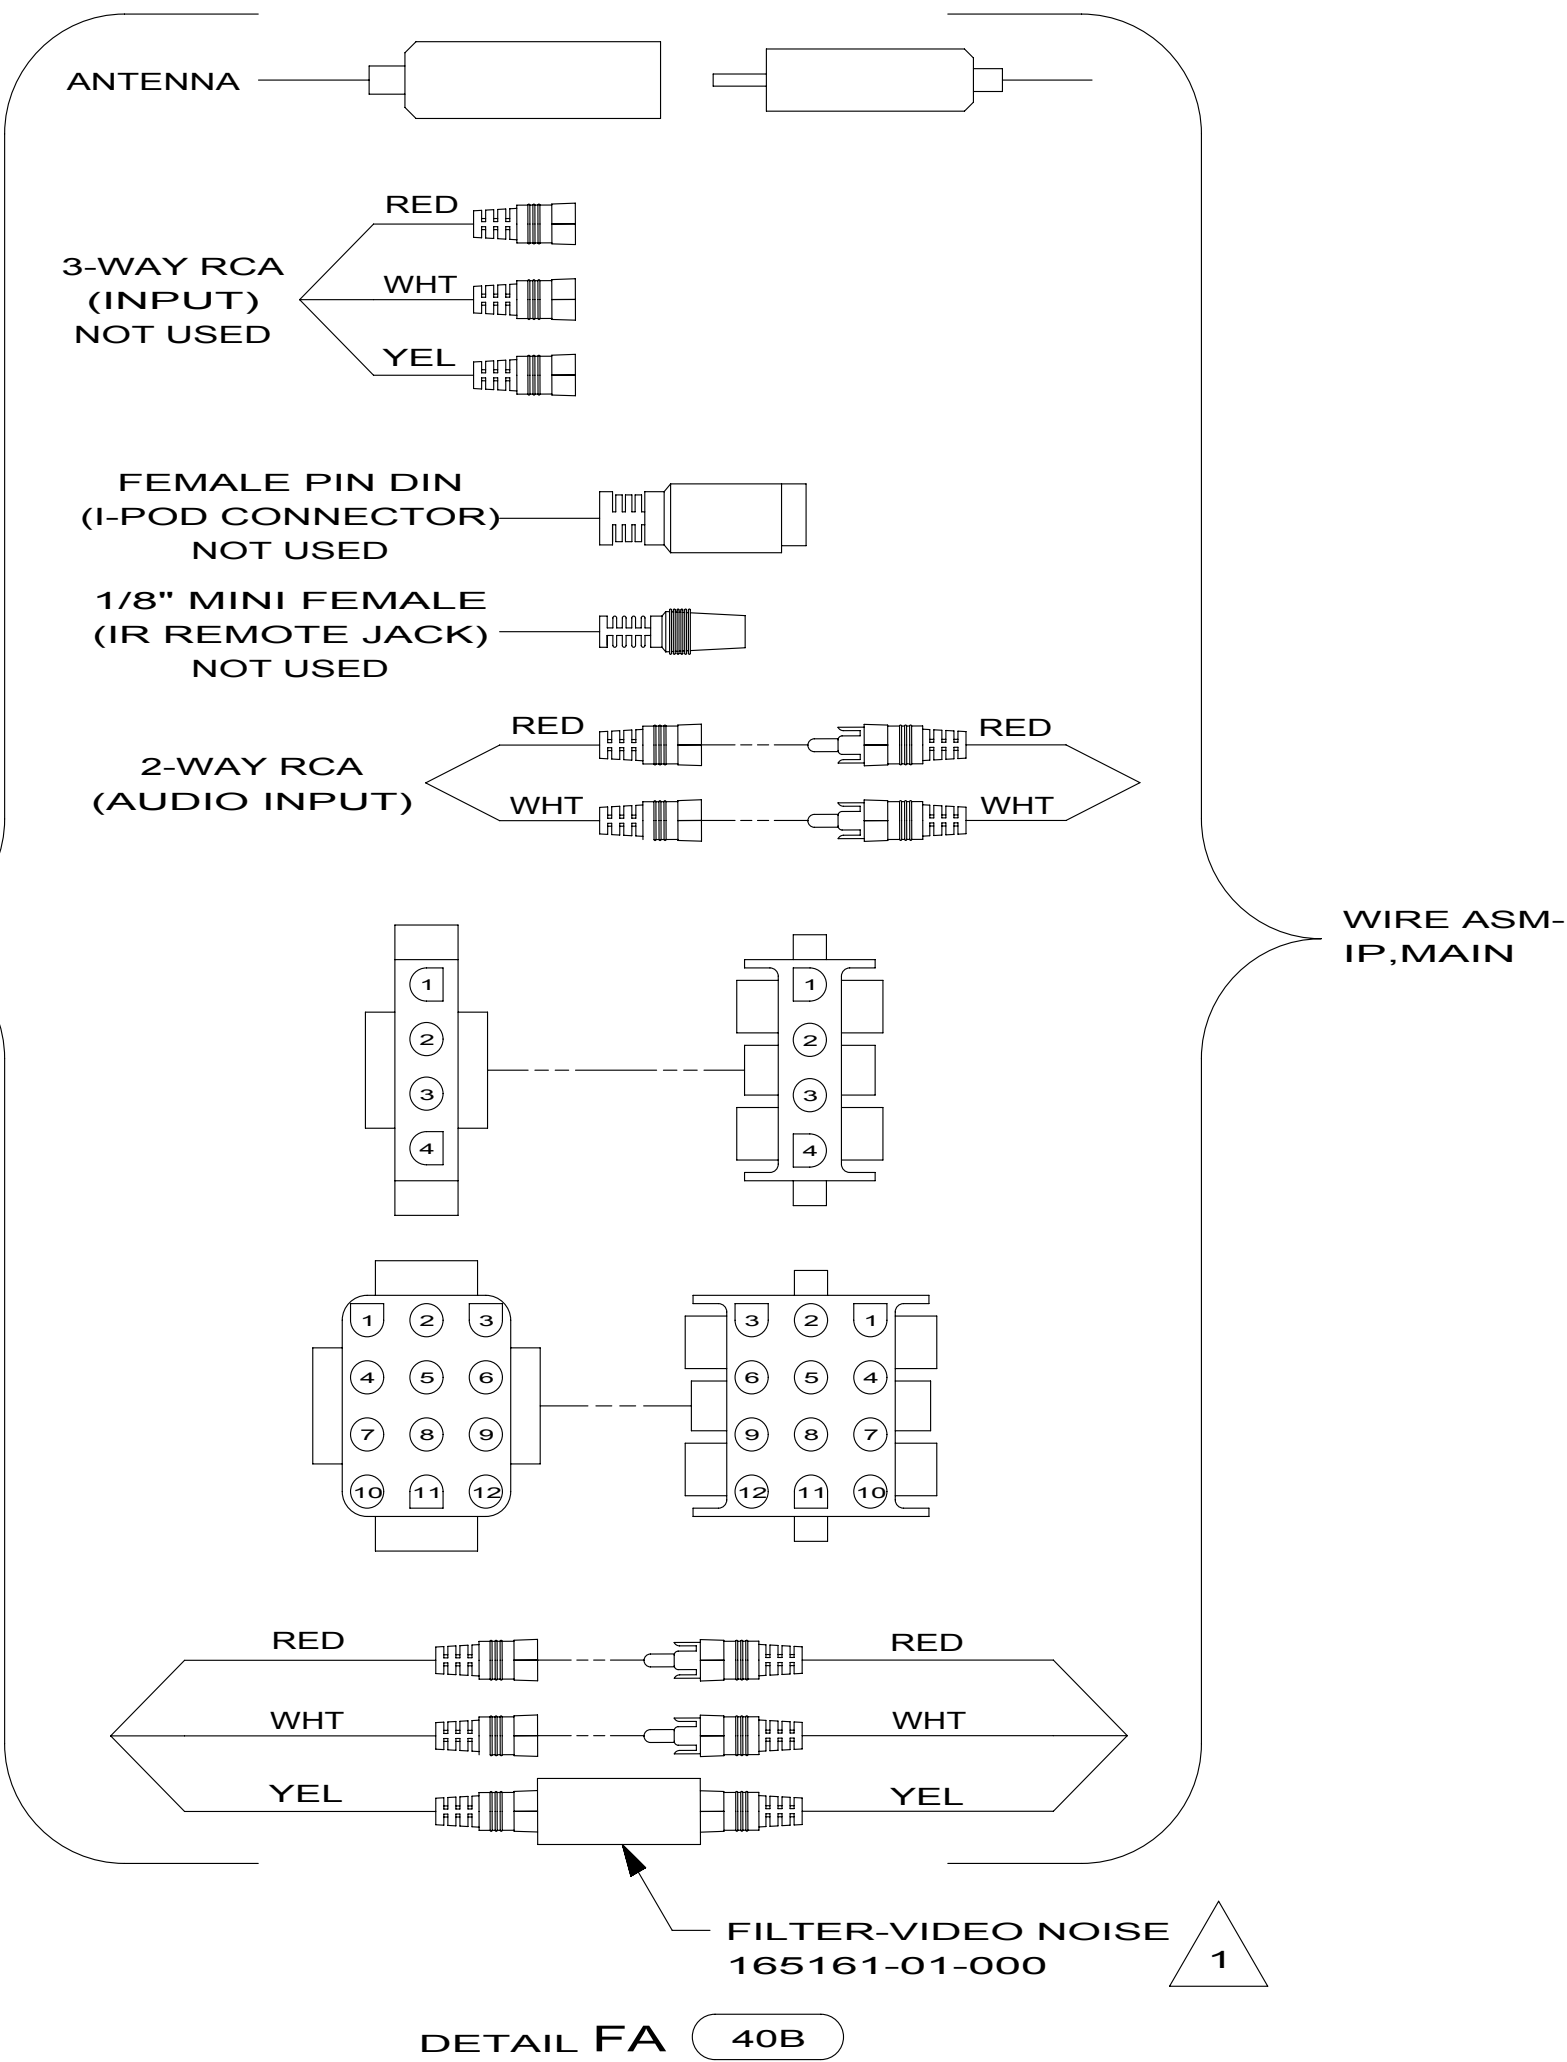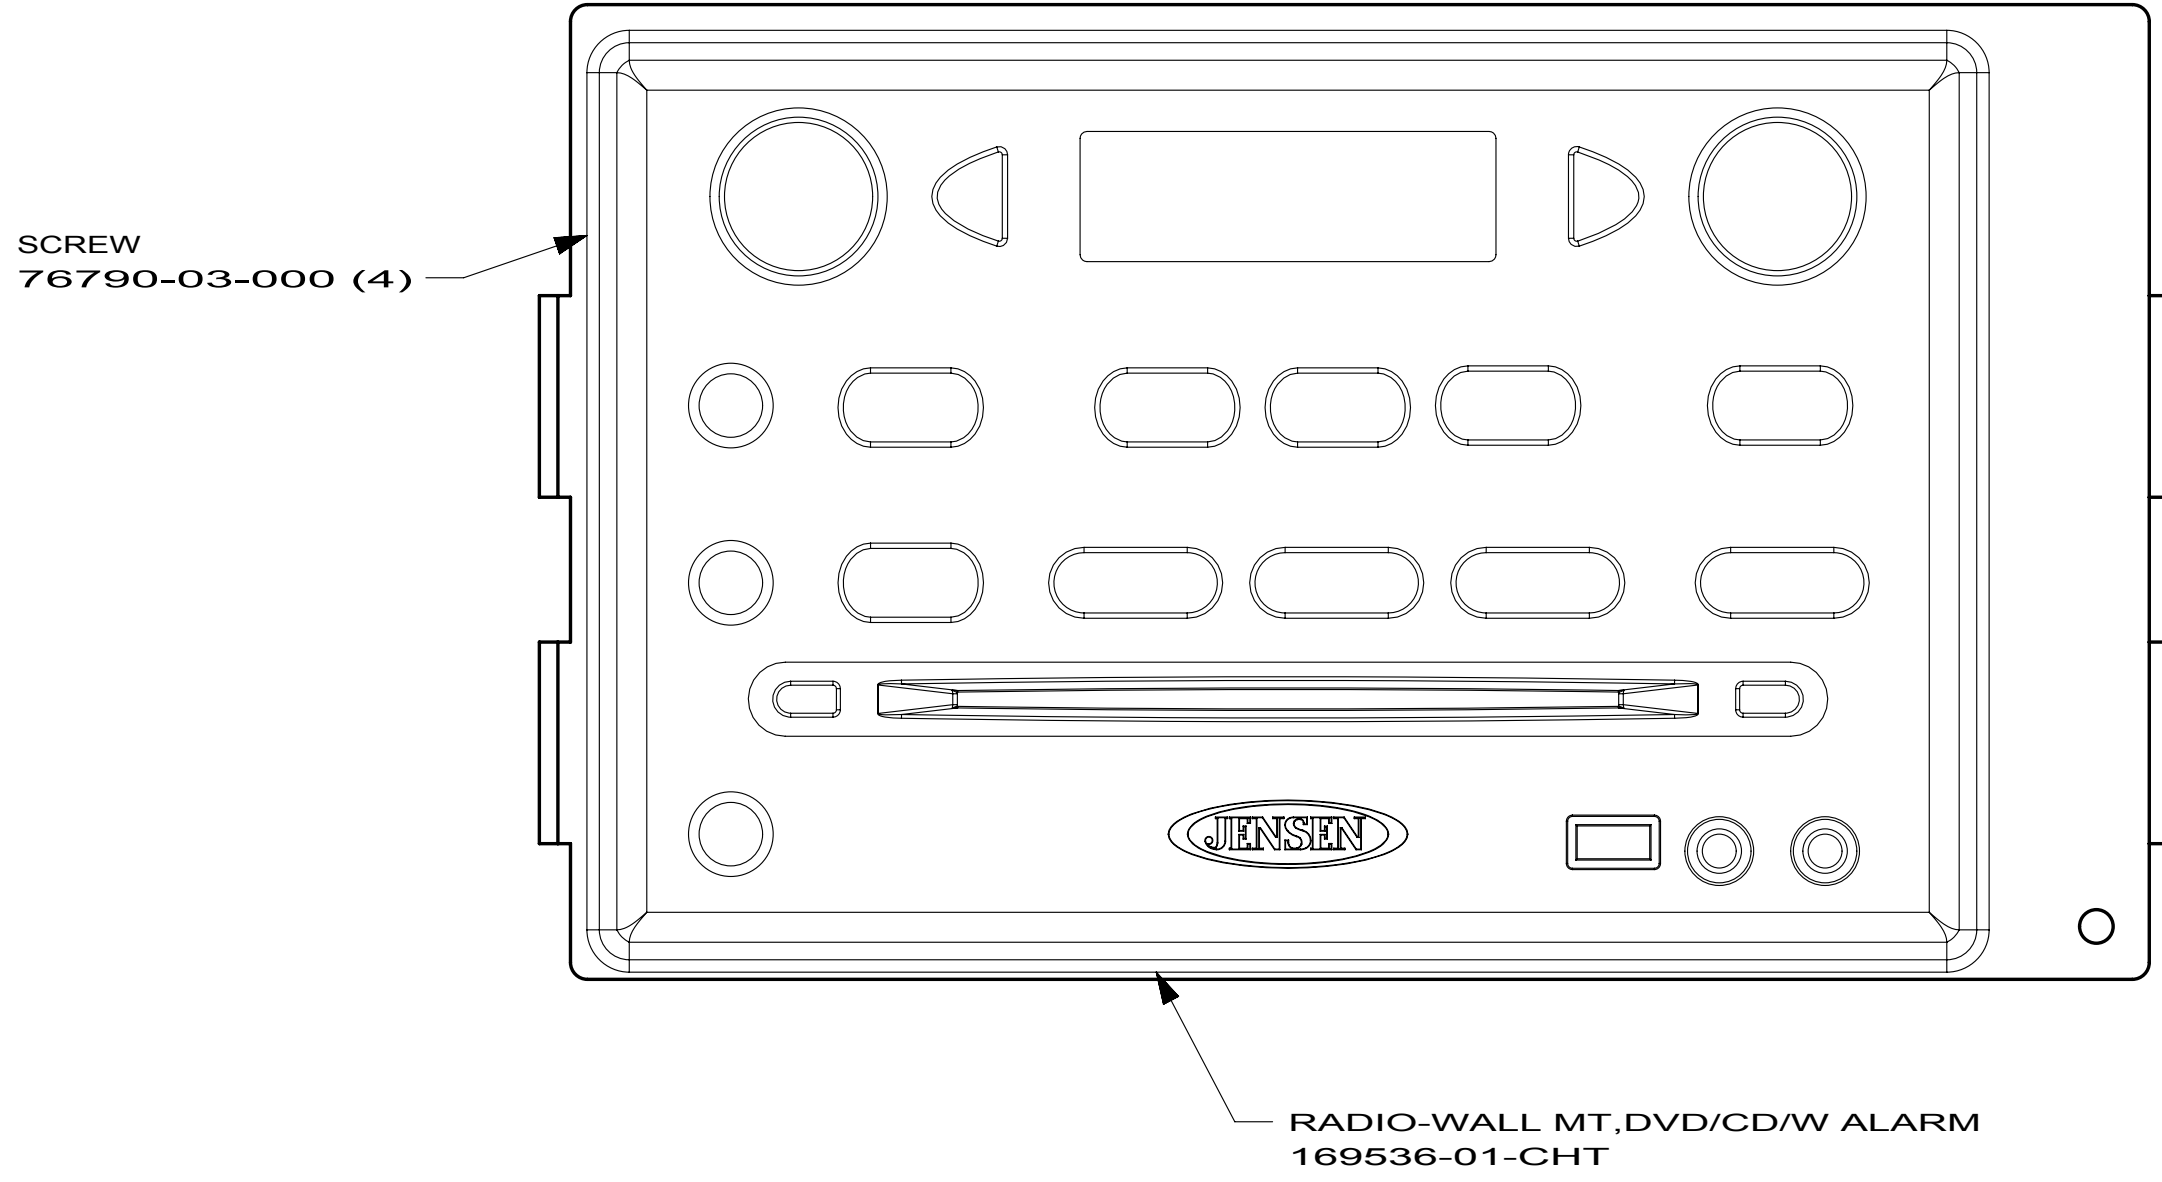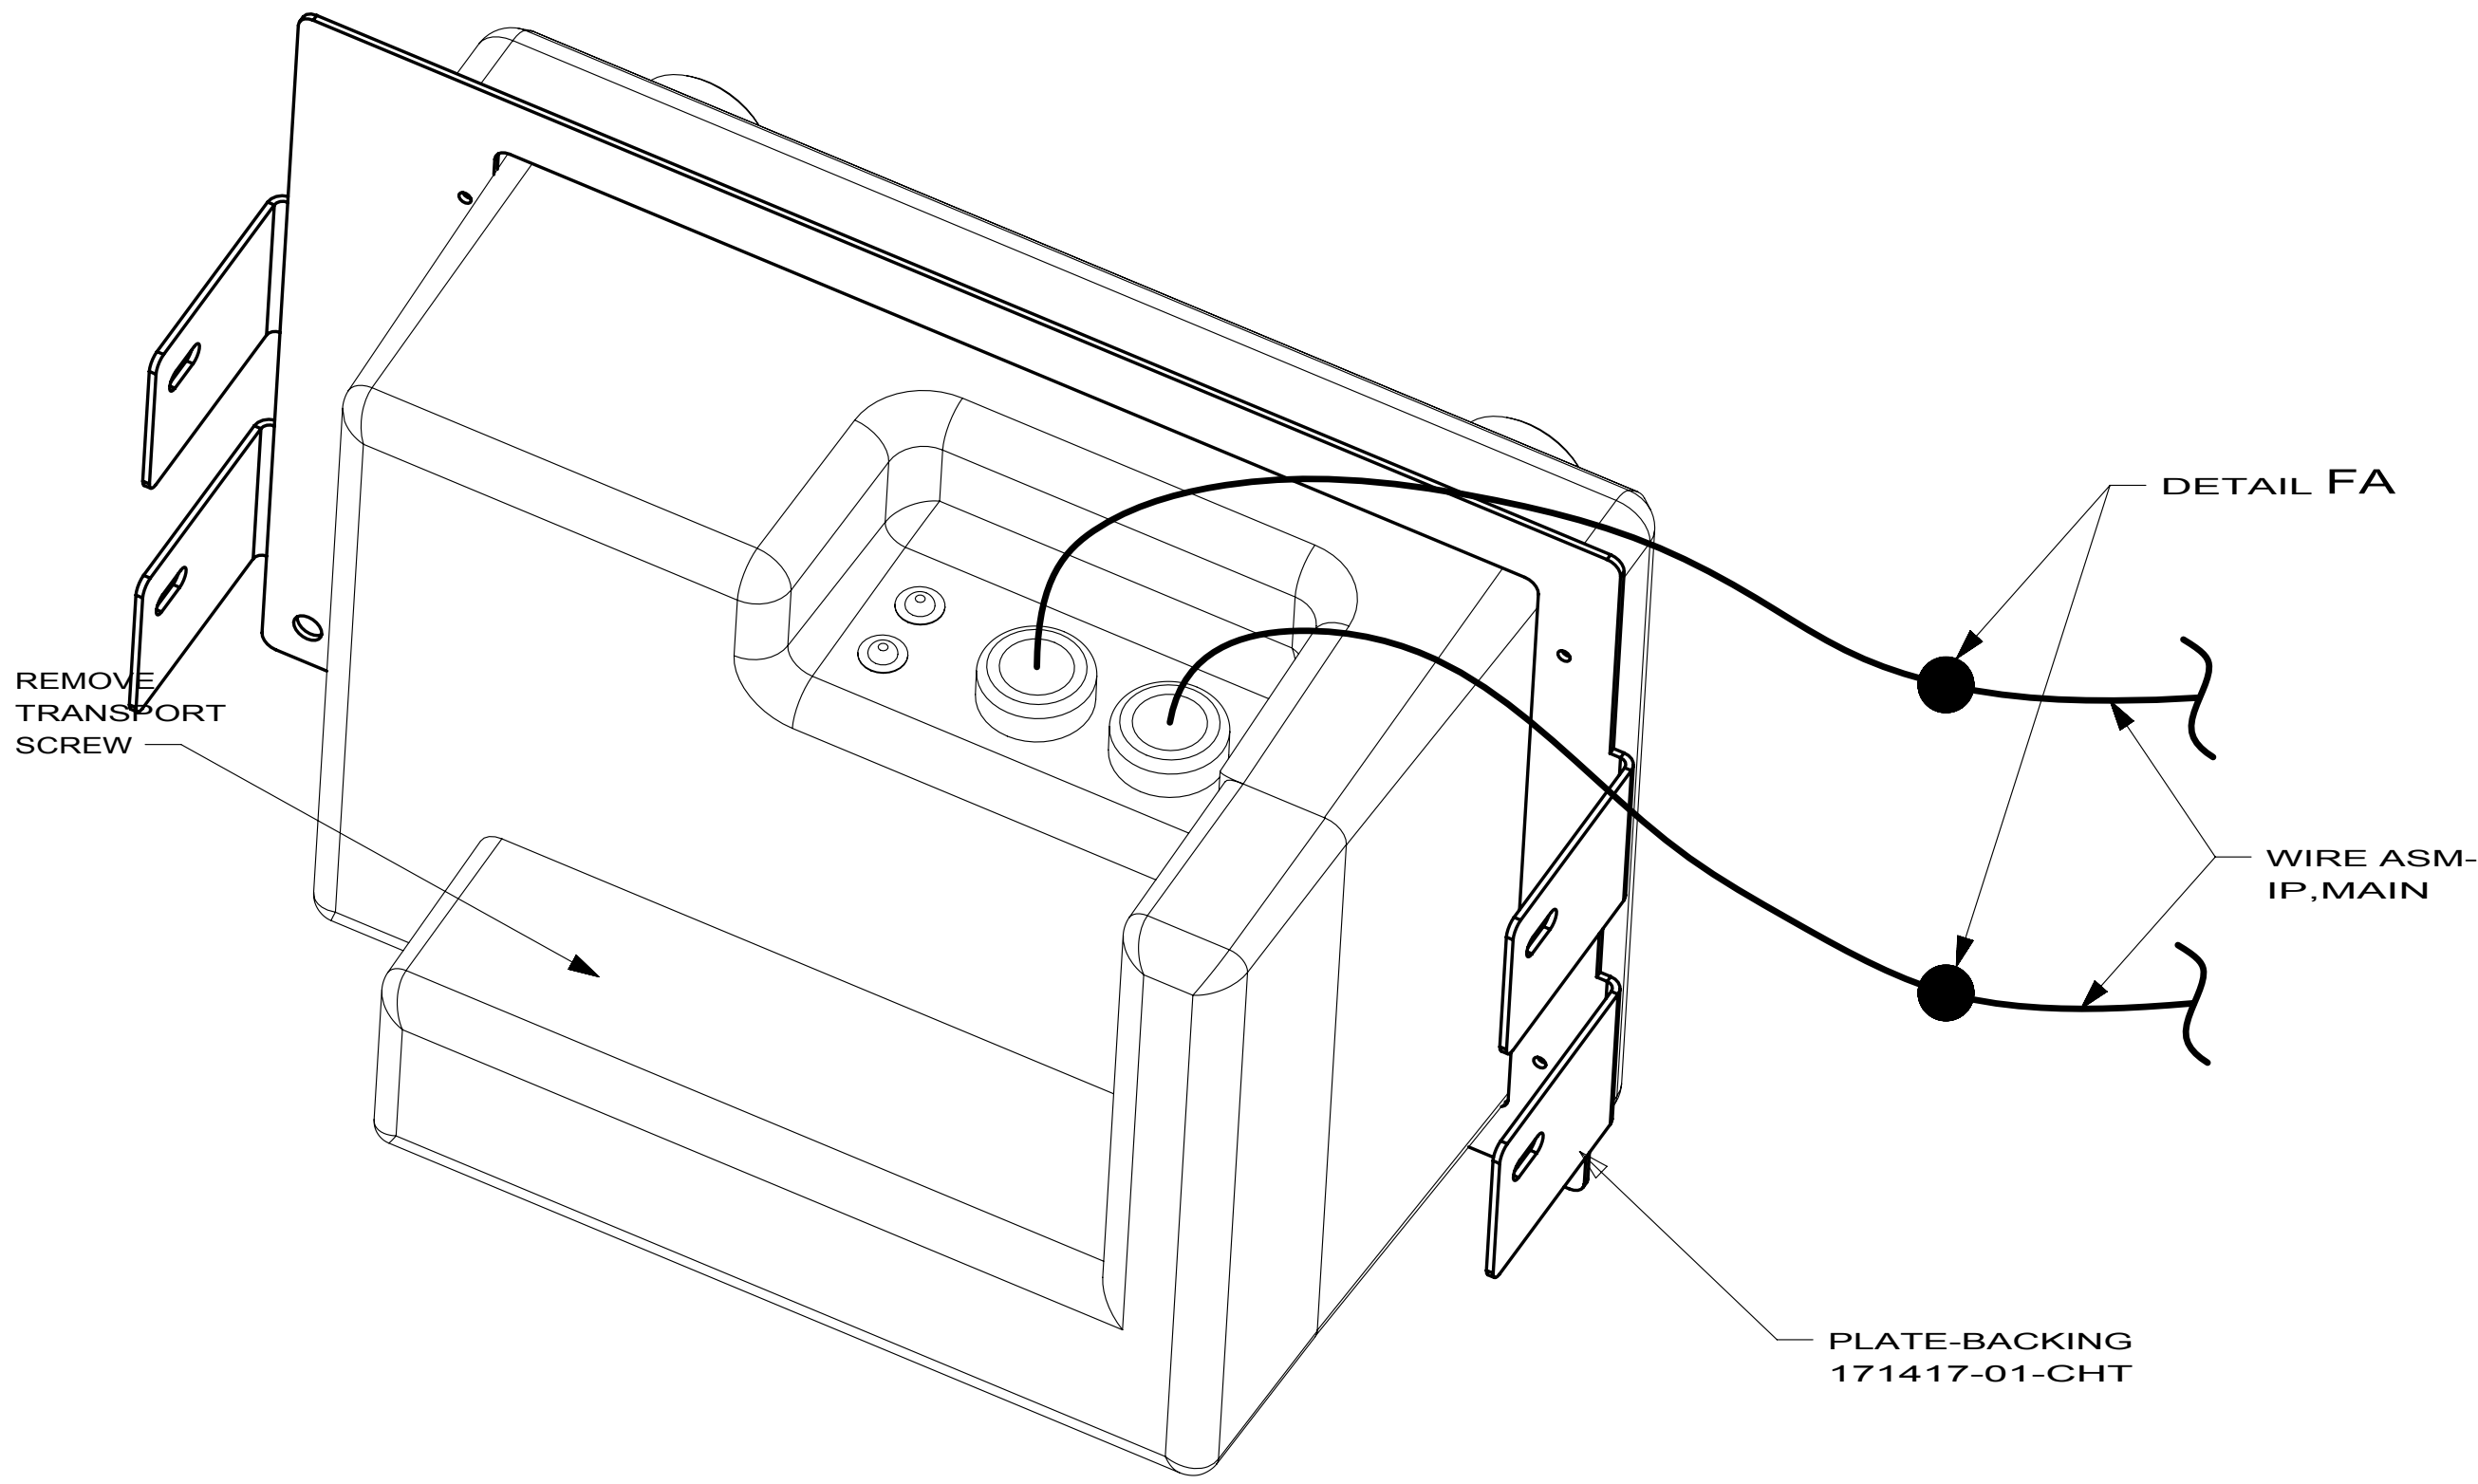


255 D-SERIES
255 E-SERIES
169847-05

- 255 RADIO/AM/FM/CD/DVD PLAYER
- 40B INVERTER-DC/AC, 300 WATT
- 40A INVERTER-DC/AC WITHOUT
- 255 RADIO/AM/FM/CD/DVD PLAYER




FIRST USED		
09 D,E-SERIES		
DO NOT SCALE DRAWING		
TITLE: RADIO INSTL		
SHEET 5	PART NO 169847	REV

1 CONNECTS IN-LINE OF YELLOW VIDEO CABLE.
WRAP BOTH ENDS OF FILTER CONNECTIONS WITH
TAPE 8363-01-000 TO SECURE FILTER TO WIRE ASM.

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	169536-01-700	EA	REMOTE - SERVICE PACK	PSVCAWM970

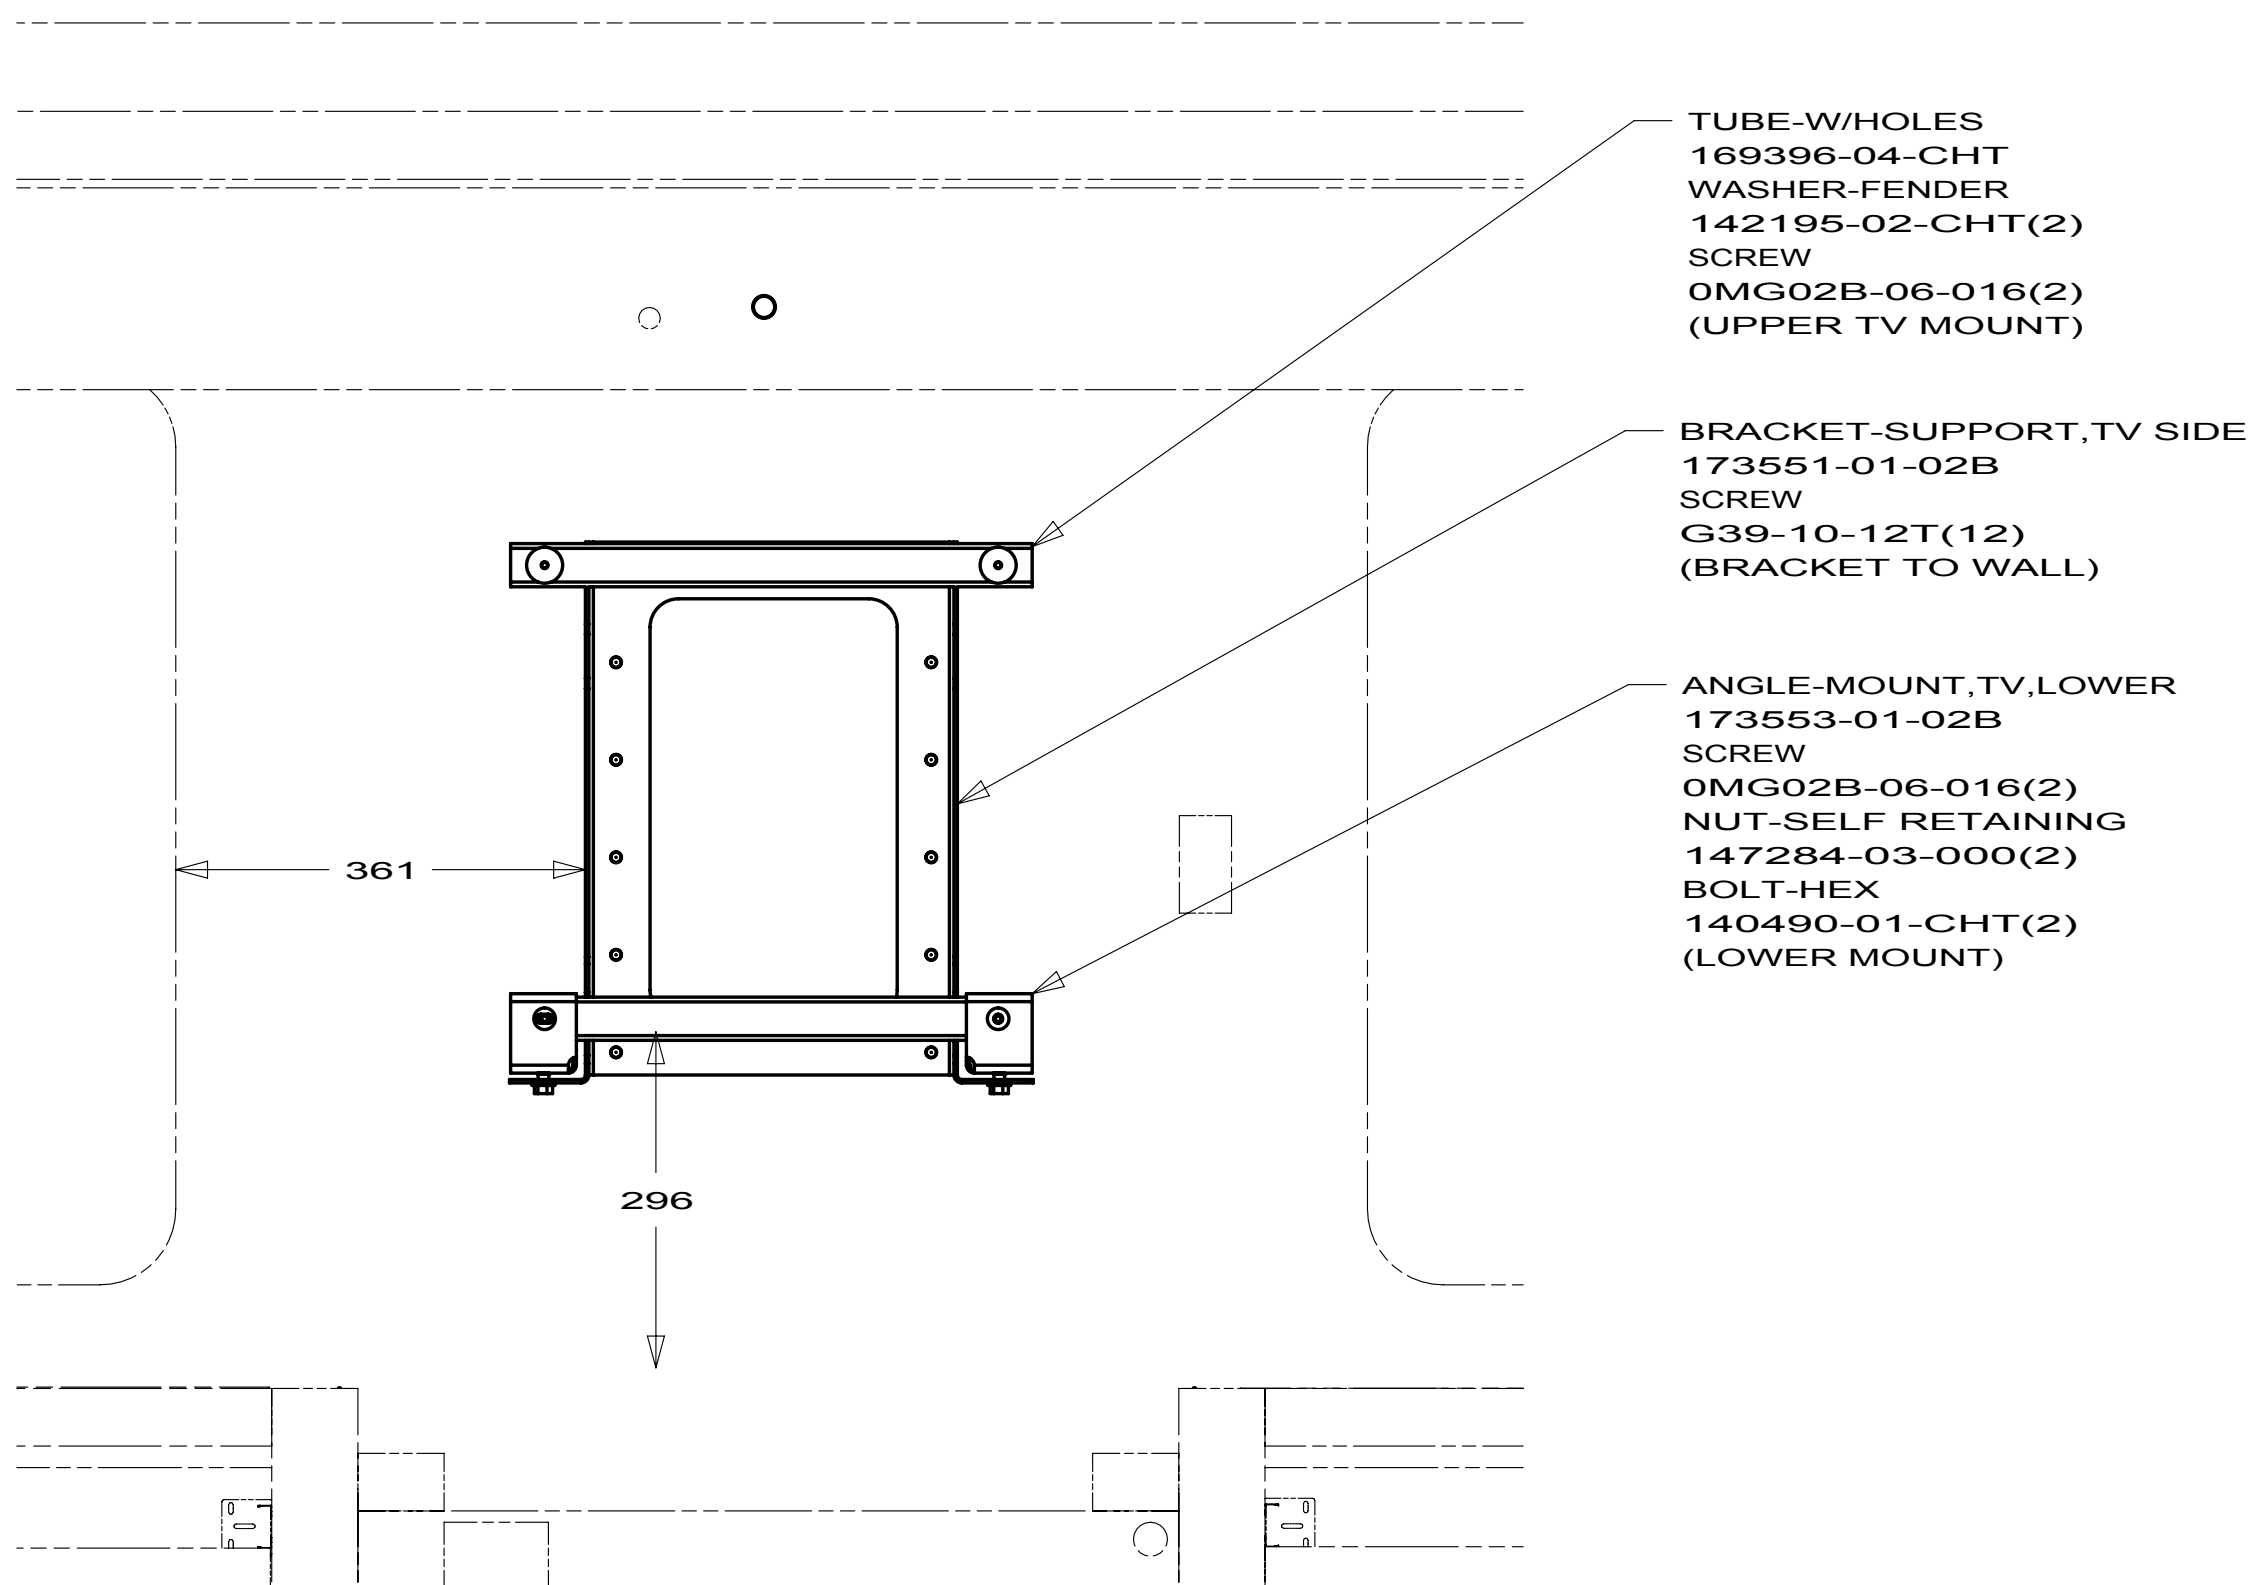

VIEW BA
21W

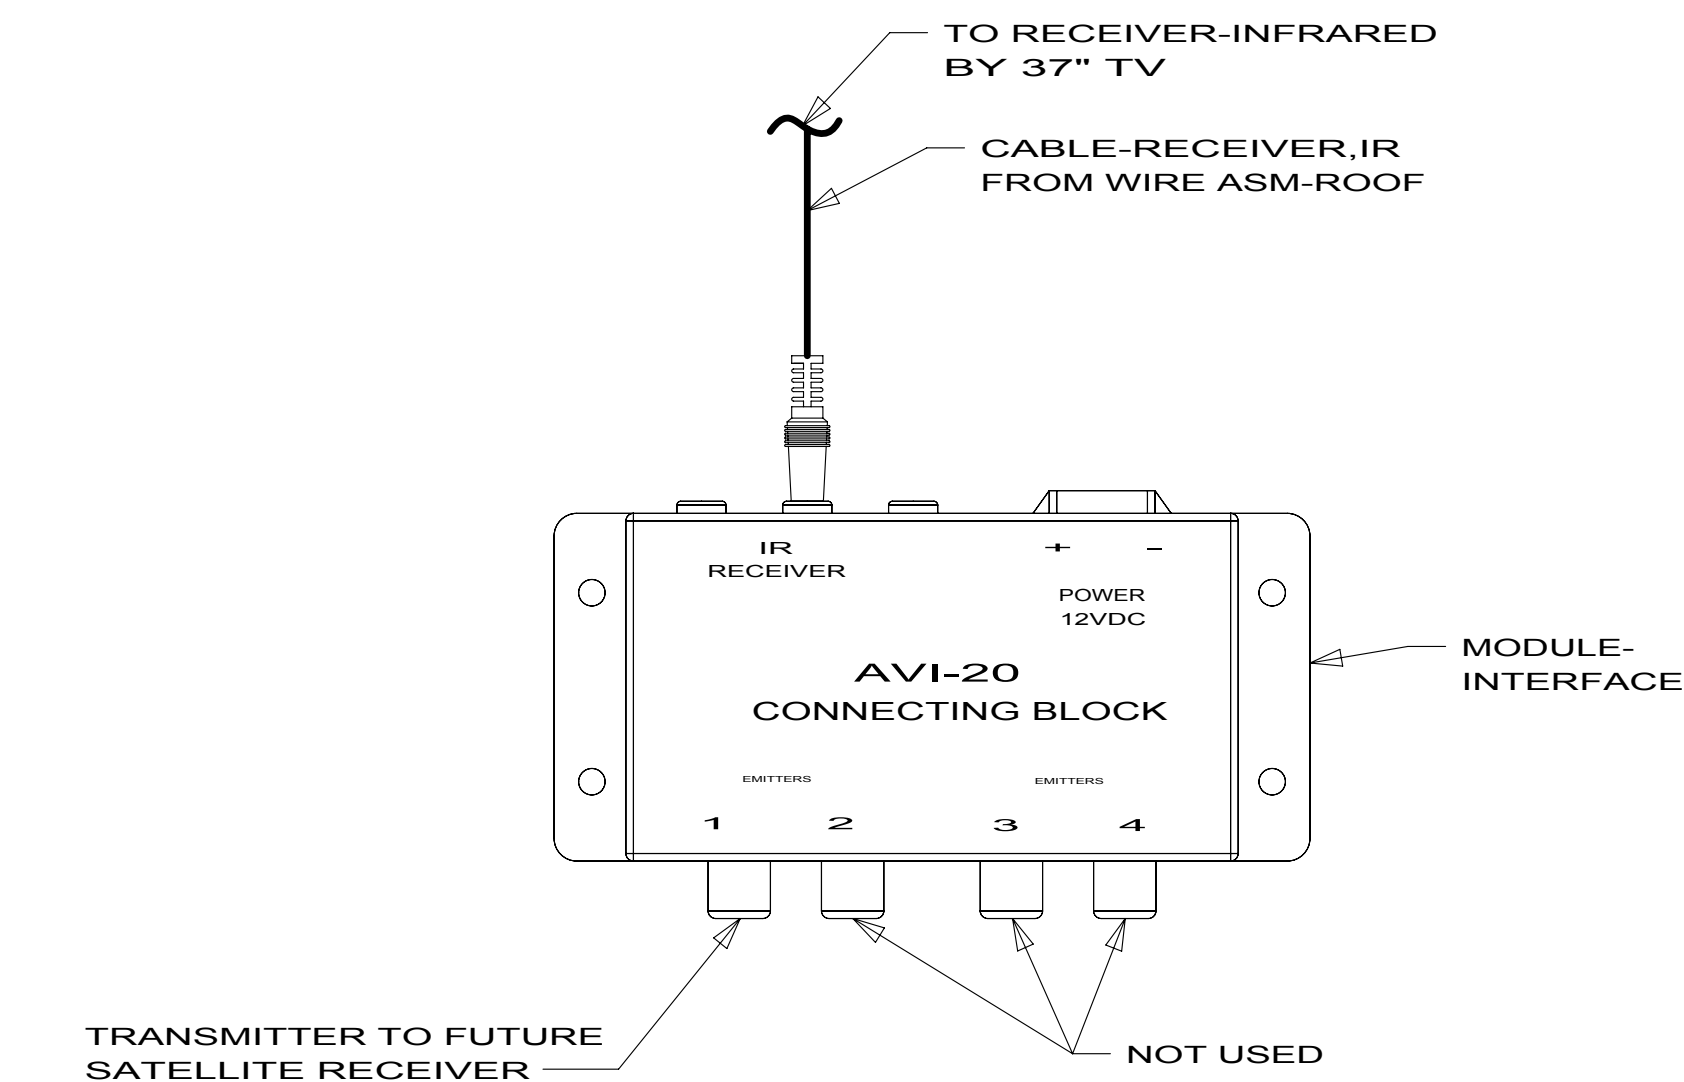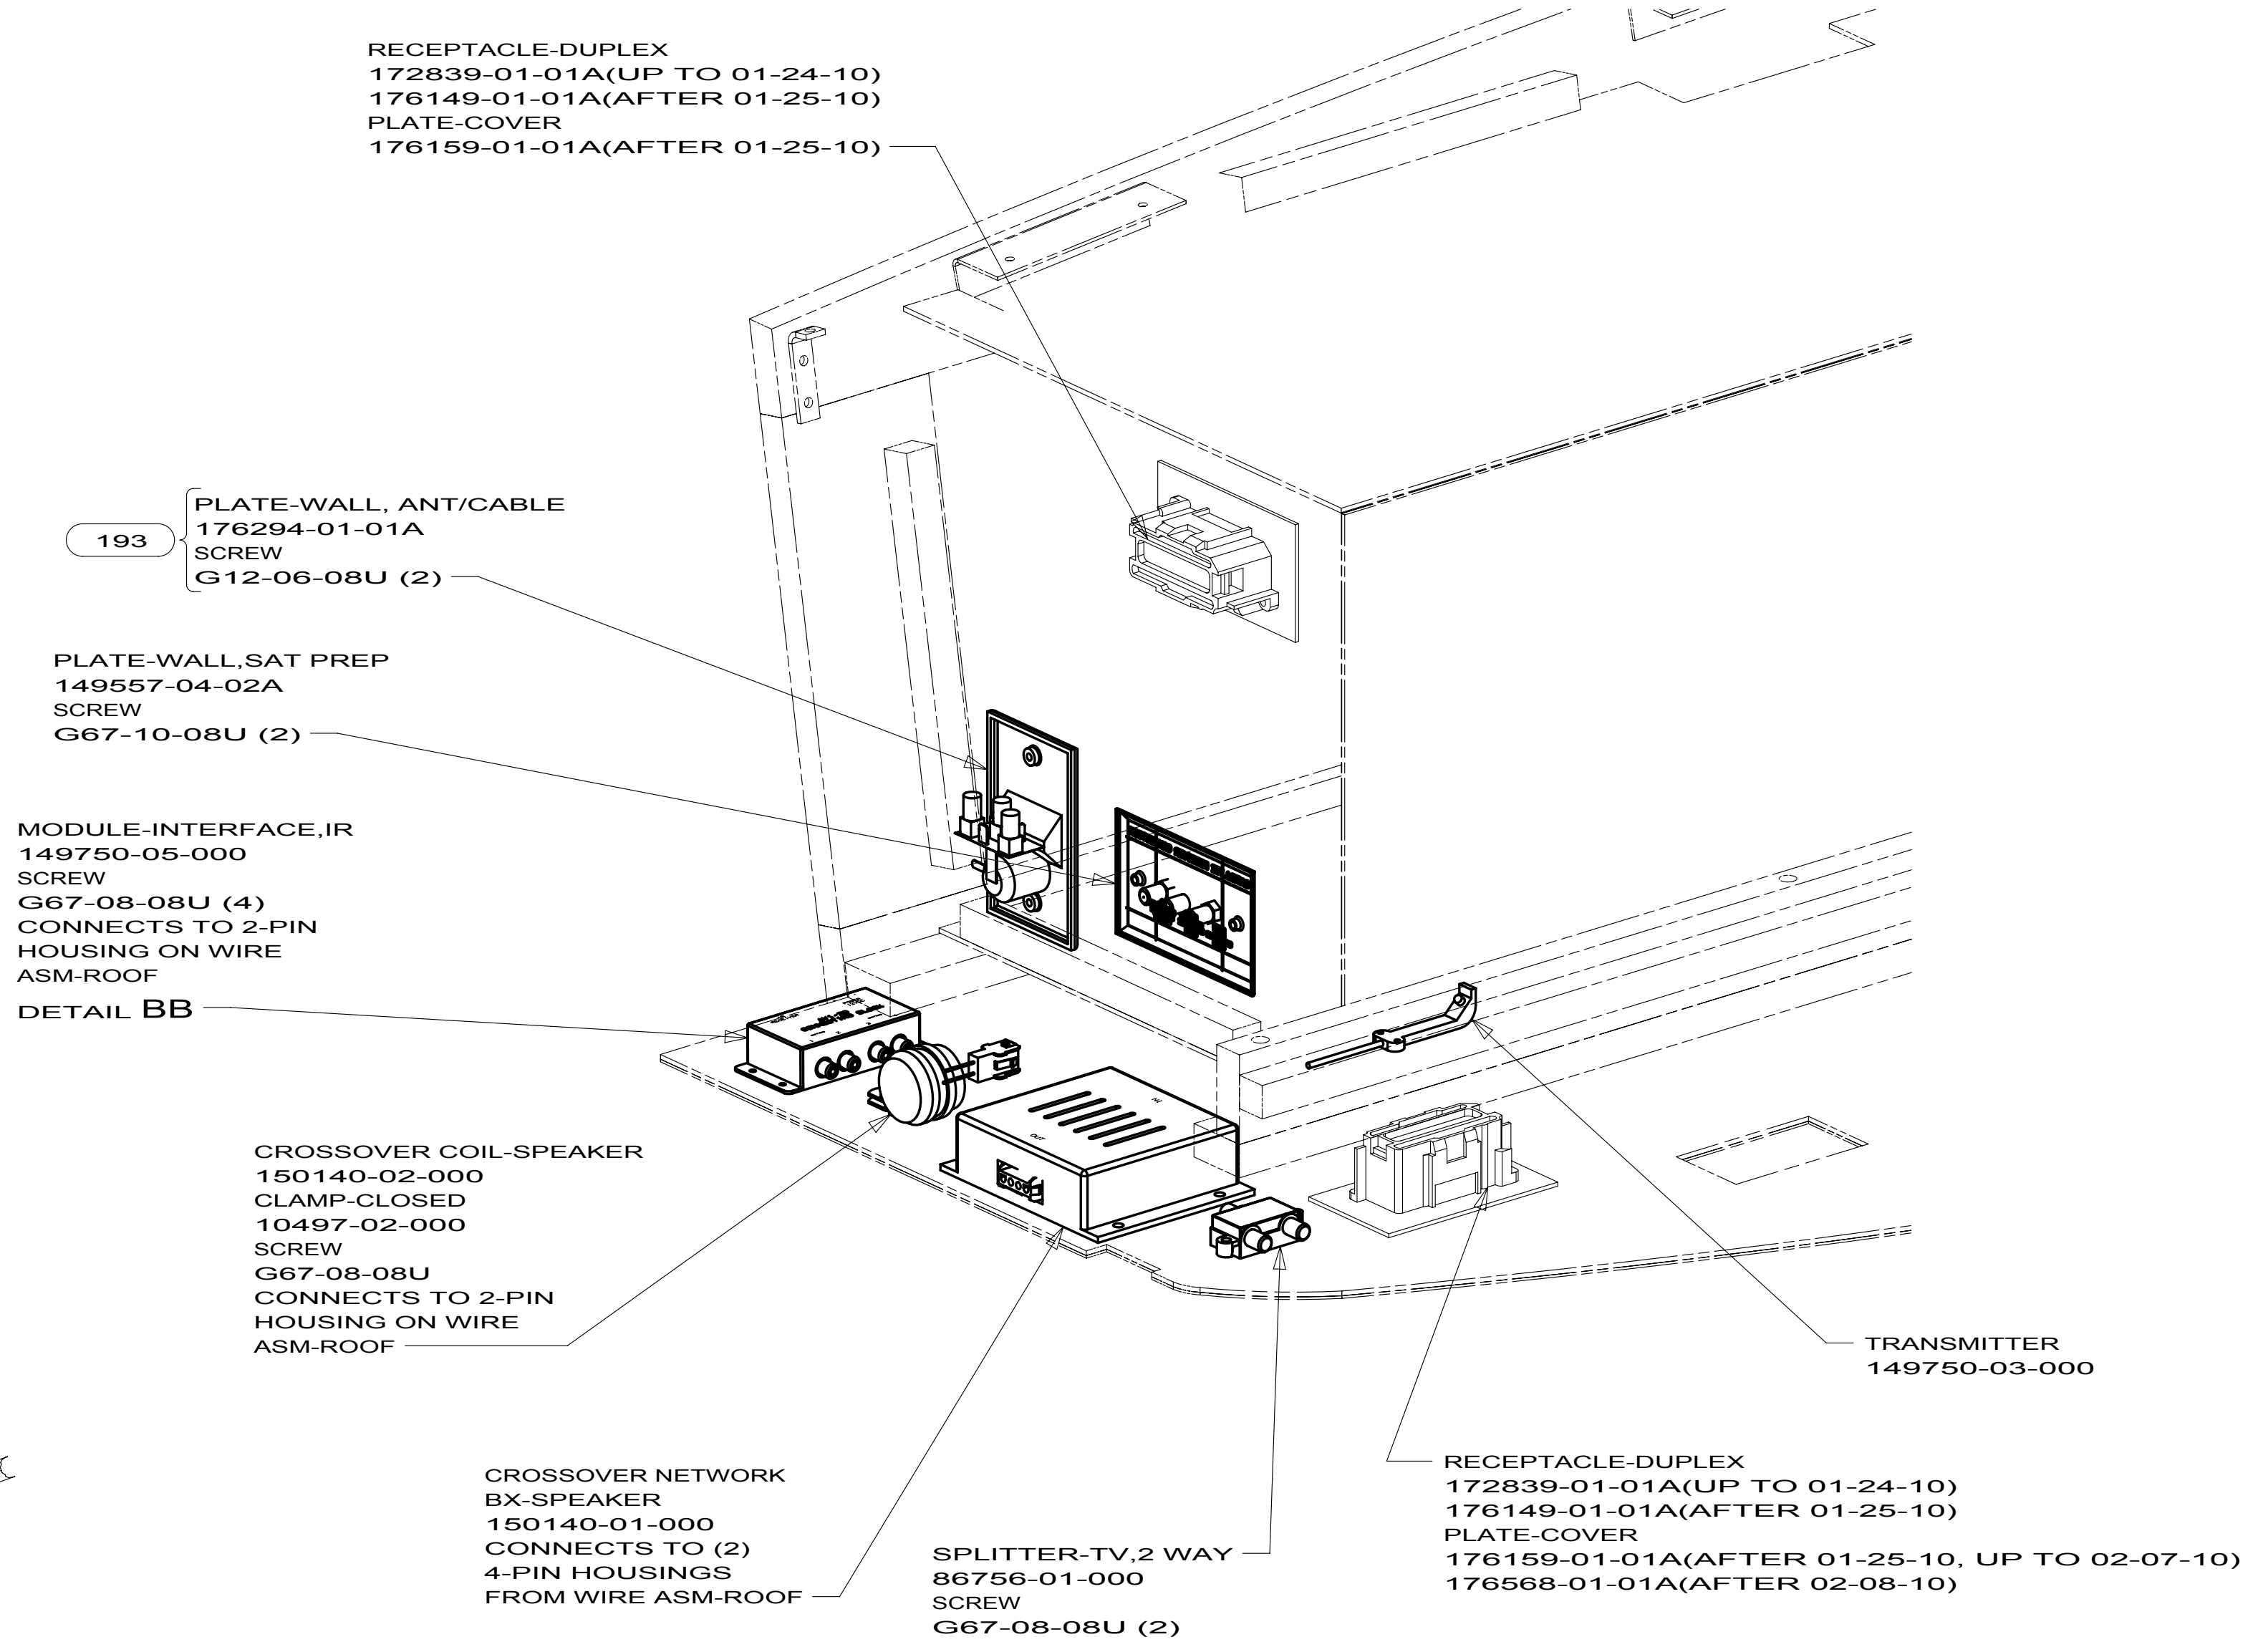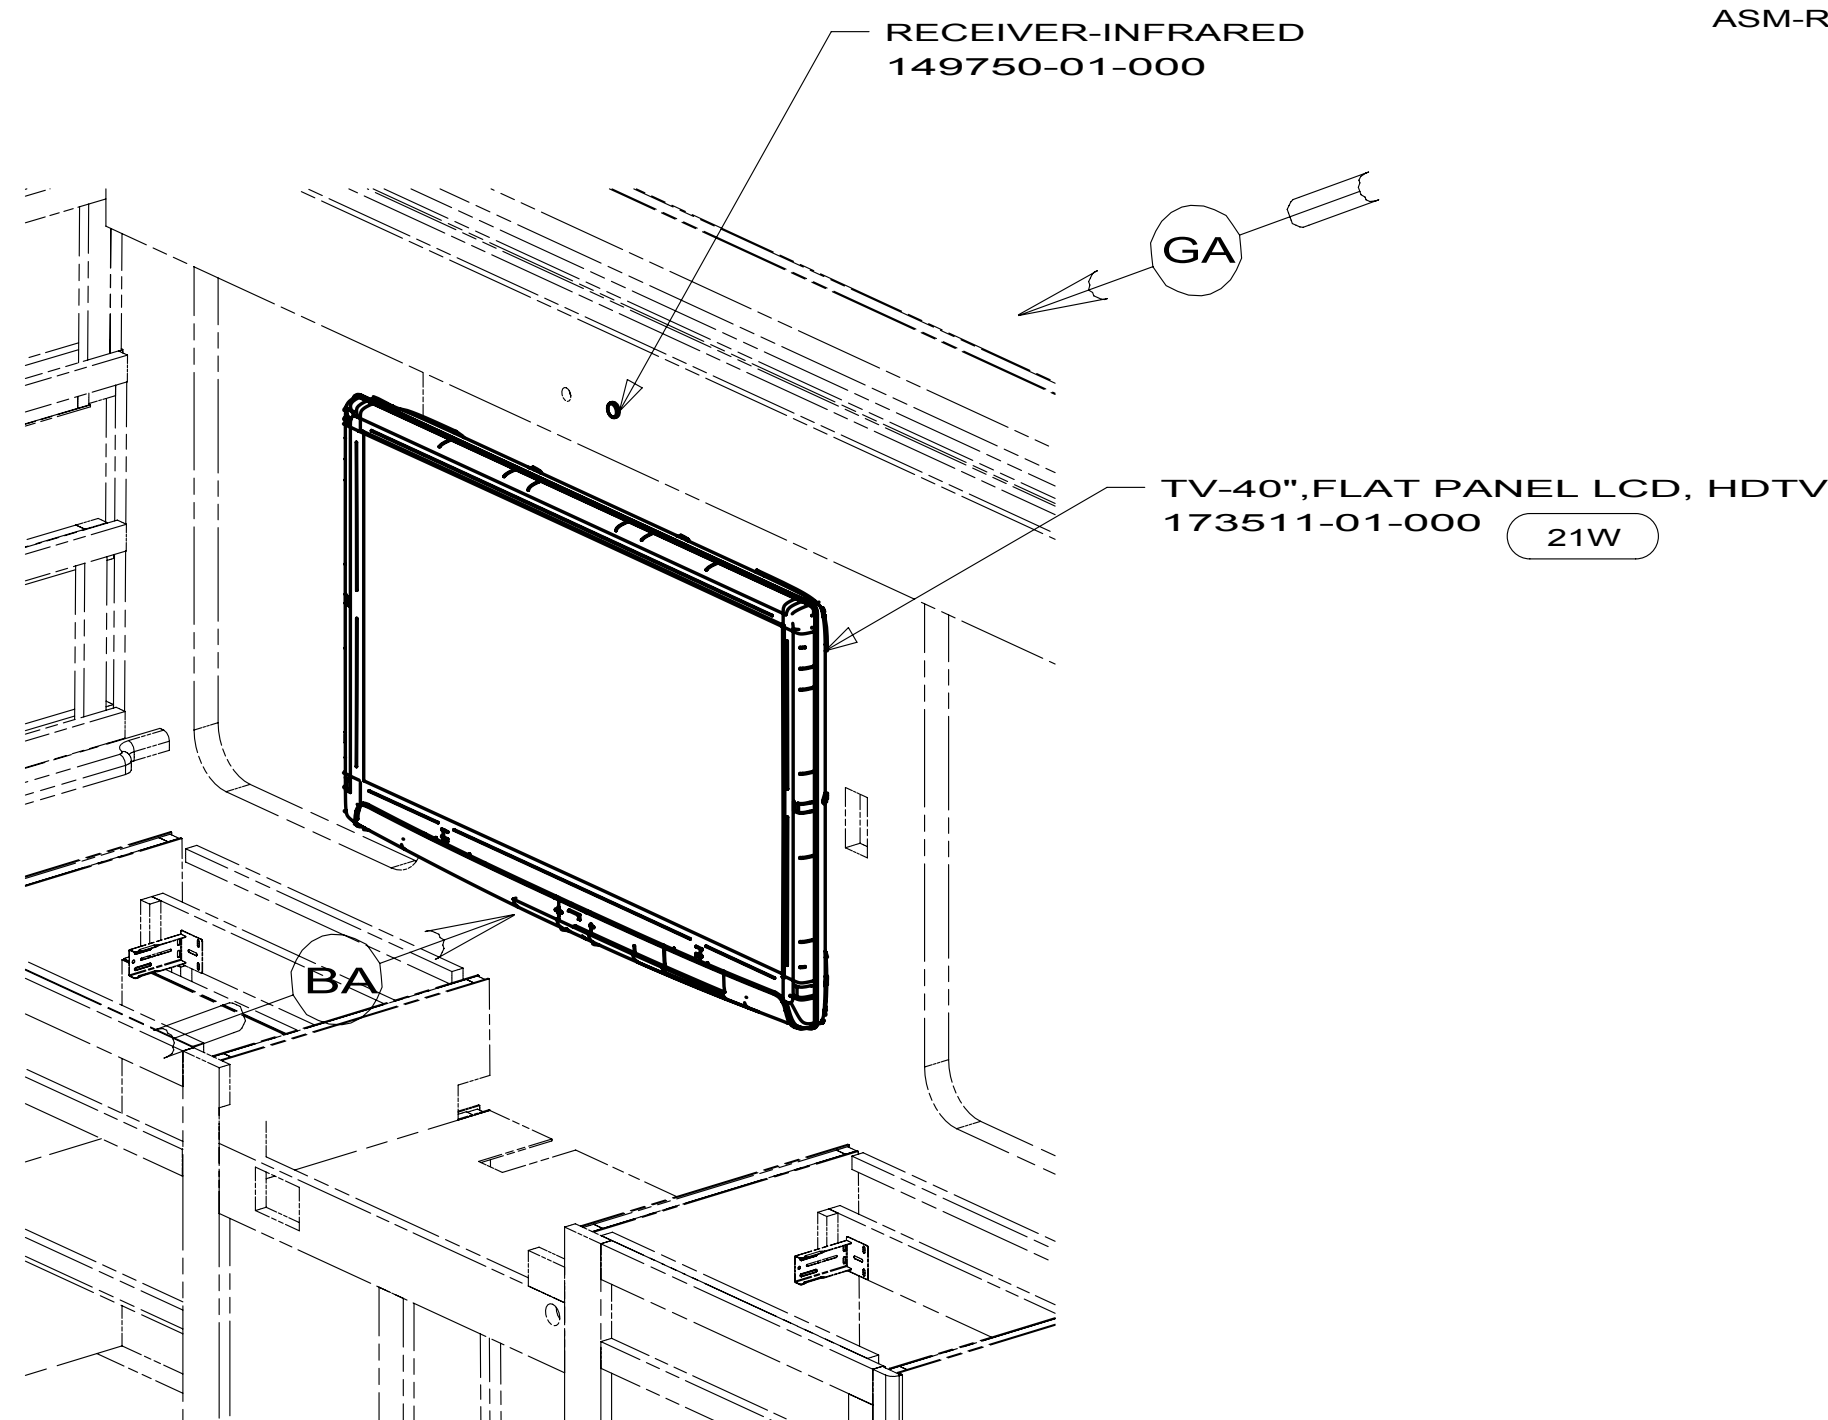

DETAIL BB


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 193 TV ANTENNA-AMPLIFIED SYSTEM
- 21W TV-40" COLOR, STEREO W/REMOTE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-TV/DVD		
SHEET 2	PART NO 169914	REV



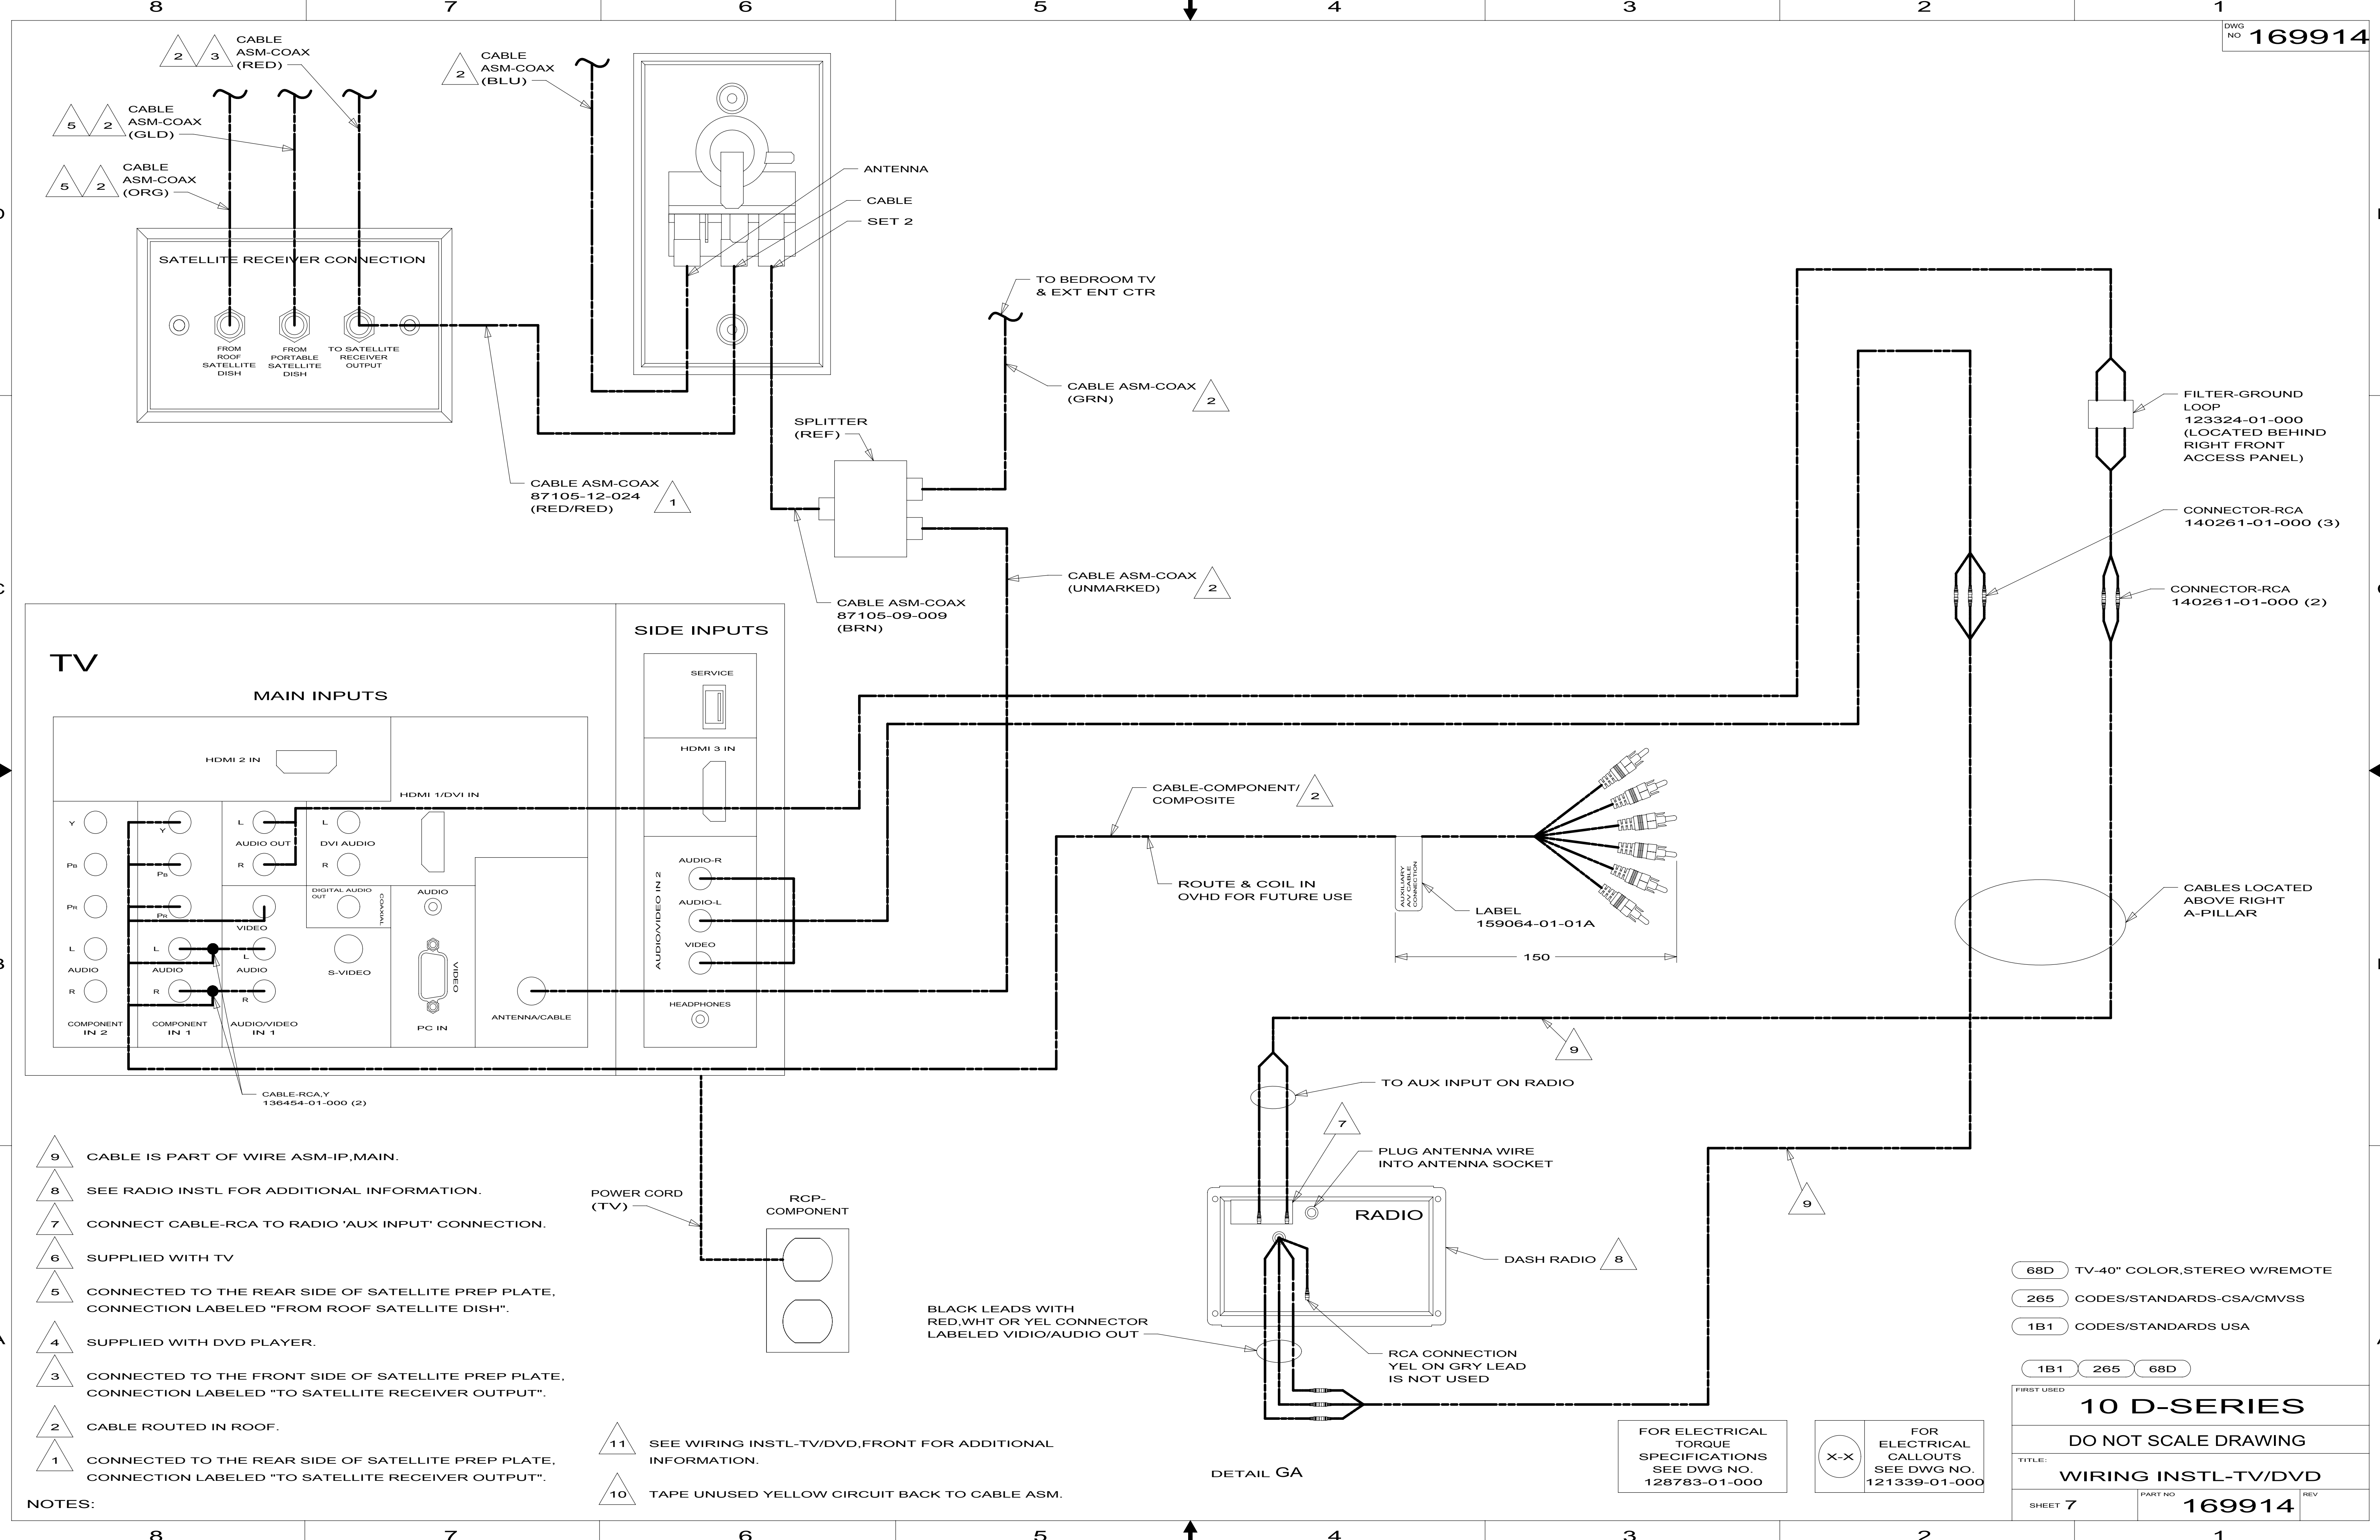

- NOTES:
- 9 CABLE IS PART OF WIRE ASM-IP,MAIN.
 - 8 SEE RADIO INSTL FOR ADDITIONAL INFORMATION.
 - 7 CONNECT CABLE-RCA TO RADIO 'AUX INPUT' CONNECTION.
 - 6 SUPPLIED WITH TV
 - 5 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED "FROM ROOF SATELLITE DISH".
 - 4 SUPPLIED WITH DVD PLAYER.
 - 3 CONNECTED TO THE FRONT SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED "TO SATELLITE RECEIVER OUTPUT".
 - 2 CABLE ROUTED IN ROOF.
 - 1 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED "TO SATELLITE RECEIVER OUTPUT".

- 11 SEE WIRING INSTL-TV/DVD,FRONT FOR ADDITIONAL INFORMATION.
- 10 TAPE UNUSED YELLOW CIRCUIT BACK TO CABLE ASM.


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 68D TV-40" COLOR,STEREO W/REMOTE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-TV/DVD		
SHEET 7	PART NO 169914	REV

UP TO 05-31-09

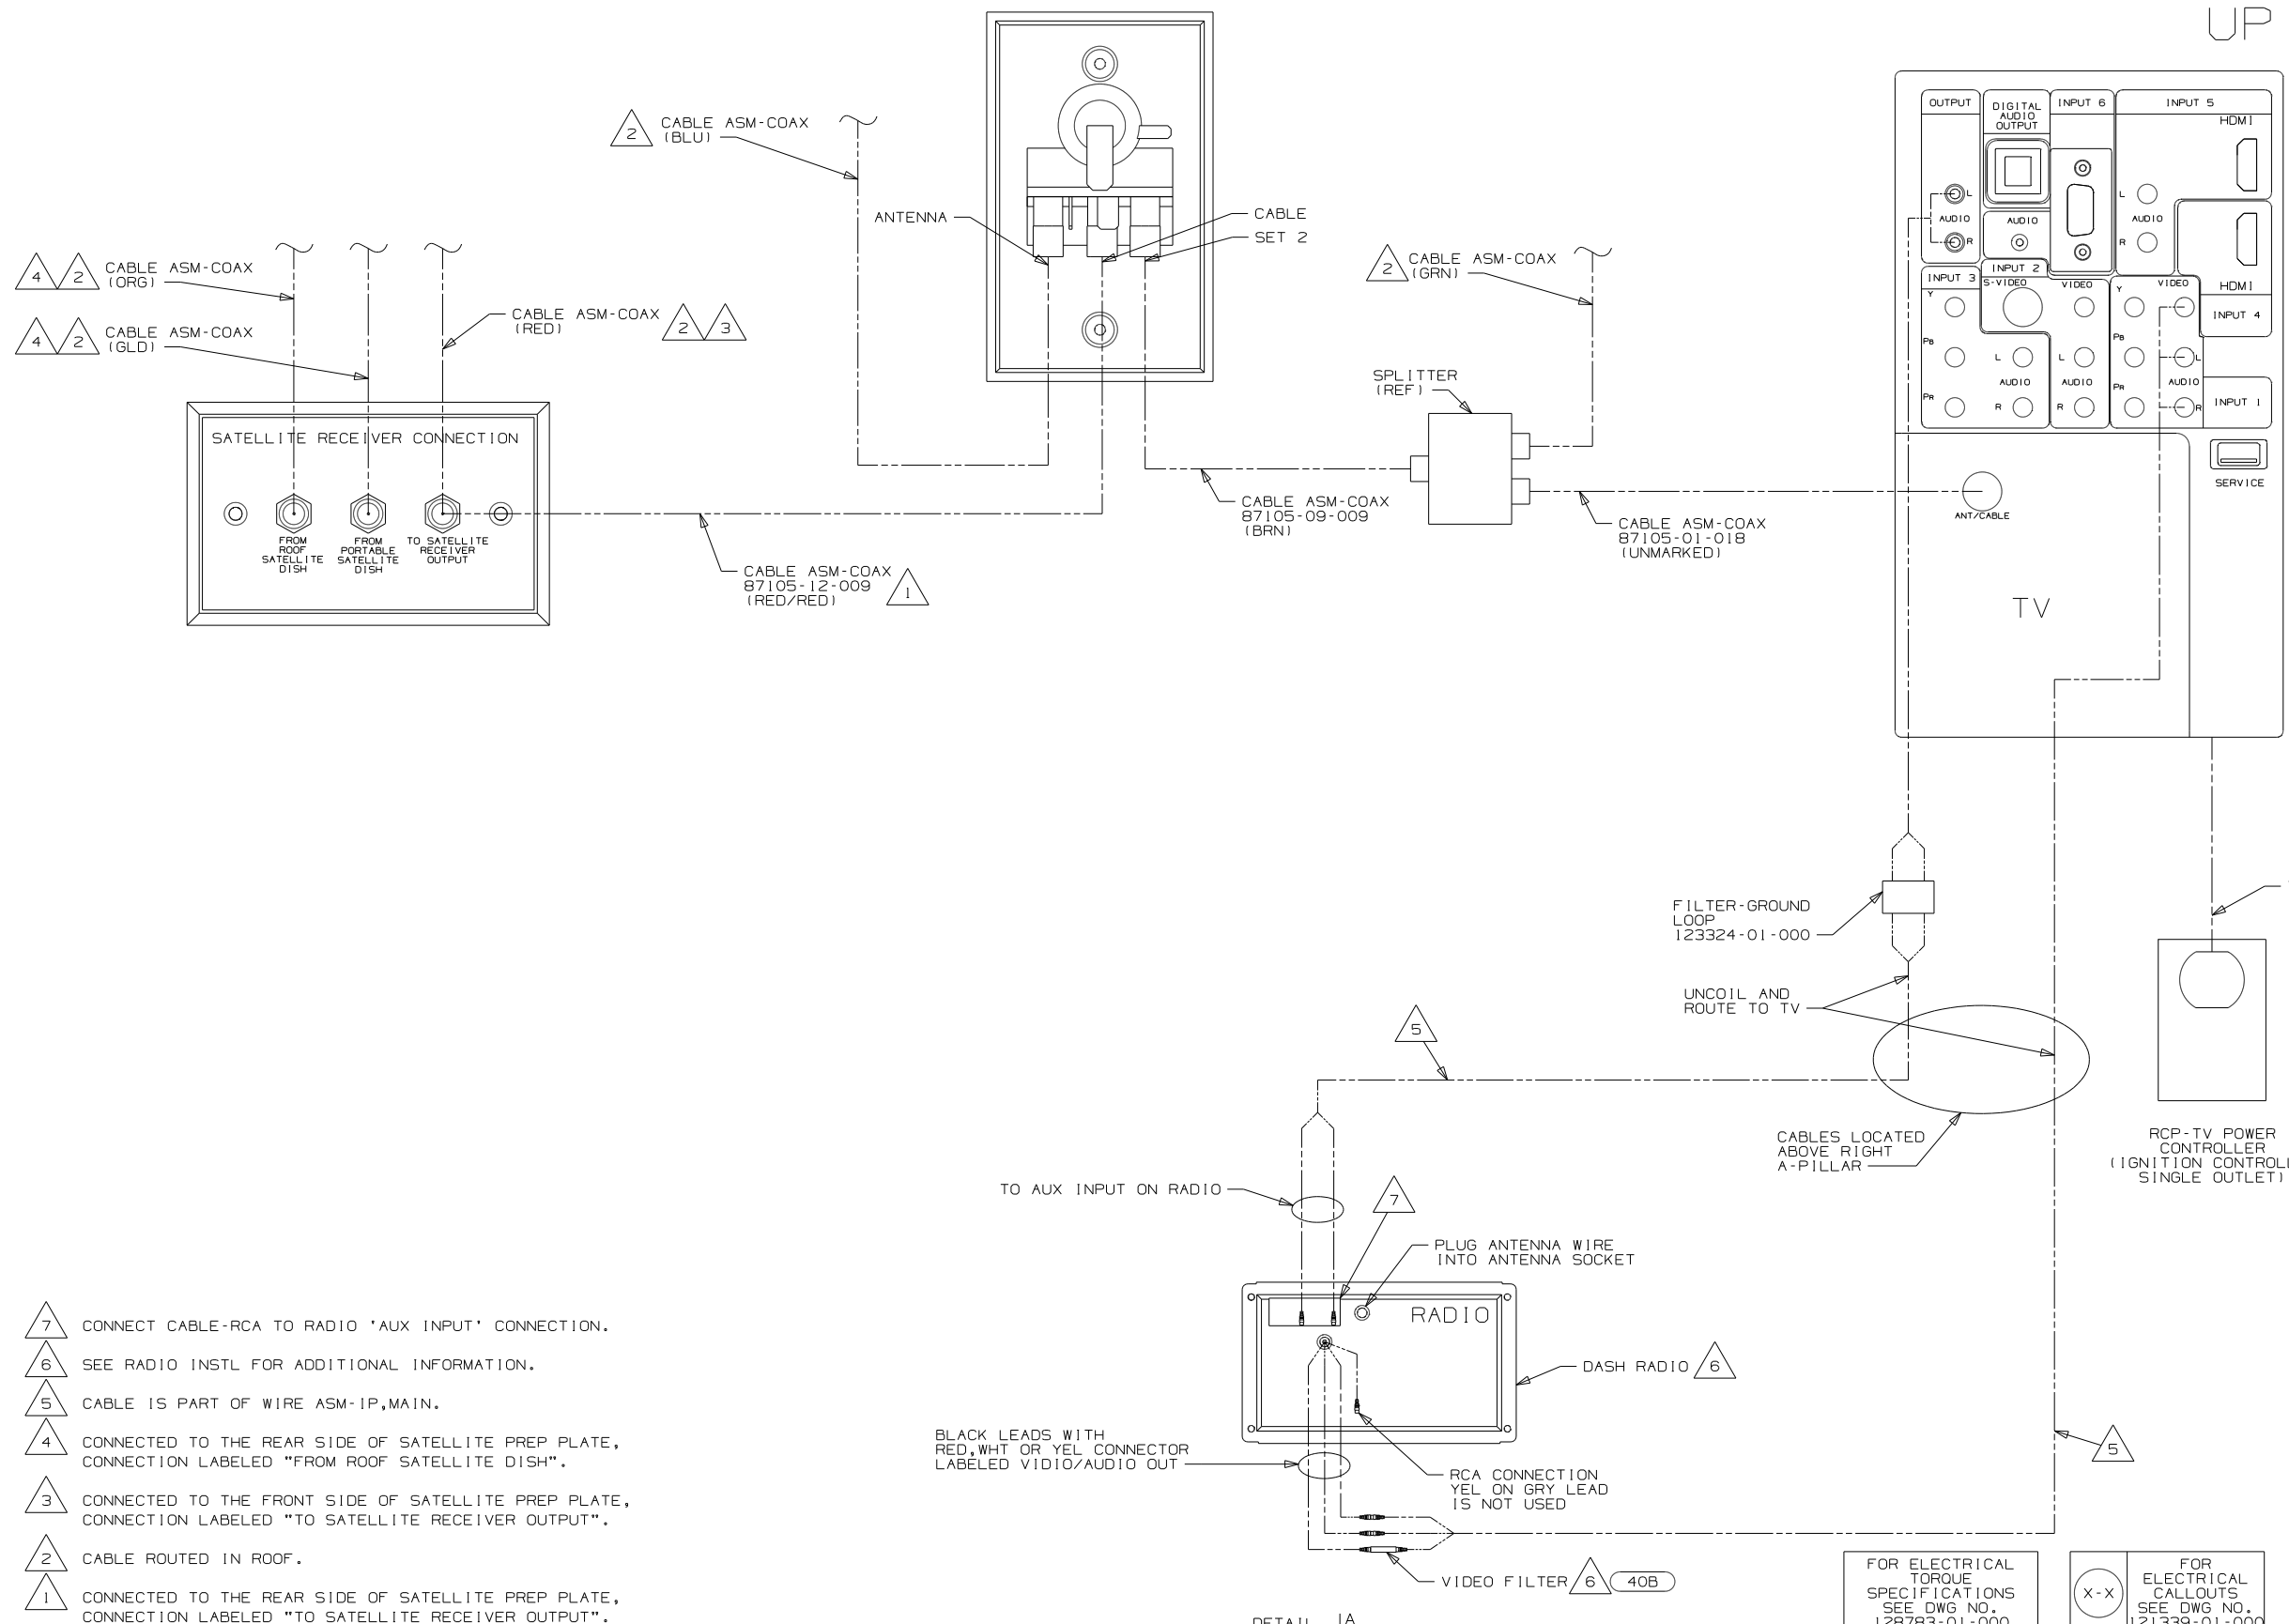


- NOTES:
- 7 CONNECT CABLE-RCA TO RADIO 'AUX INPUT' CONNECTION.
 - 6 SEE RADIO INSTL FOR ADDITIONAL INFORMATION.
 - 5 CABLE IS PART OF WIRE ASM-IP,MAIN.
 - 4 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED "FROM ROOF SATELLITE DISH".
 - 3 CONNECTED TO THE FRONT SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED "TO SATELLITE RECEIVER OUTPUT".
 - 2 CABLE ROUTED IN ROOF.
 - 1 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED "TO SATELLITE RECEIVER OUTPUT".

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 42K TV-32" COLOR,STEREO W/REMOTE
- 40B INVERTER-DC/AC, 300 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		10 D-SERIES	
		DO NOT SCALE DRAWING	
TITLE:		WIRING INSTL-TV/DVD	
SHEET 9A	PART NO	169914	REV

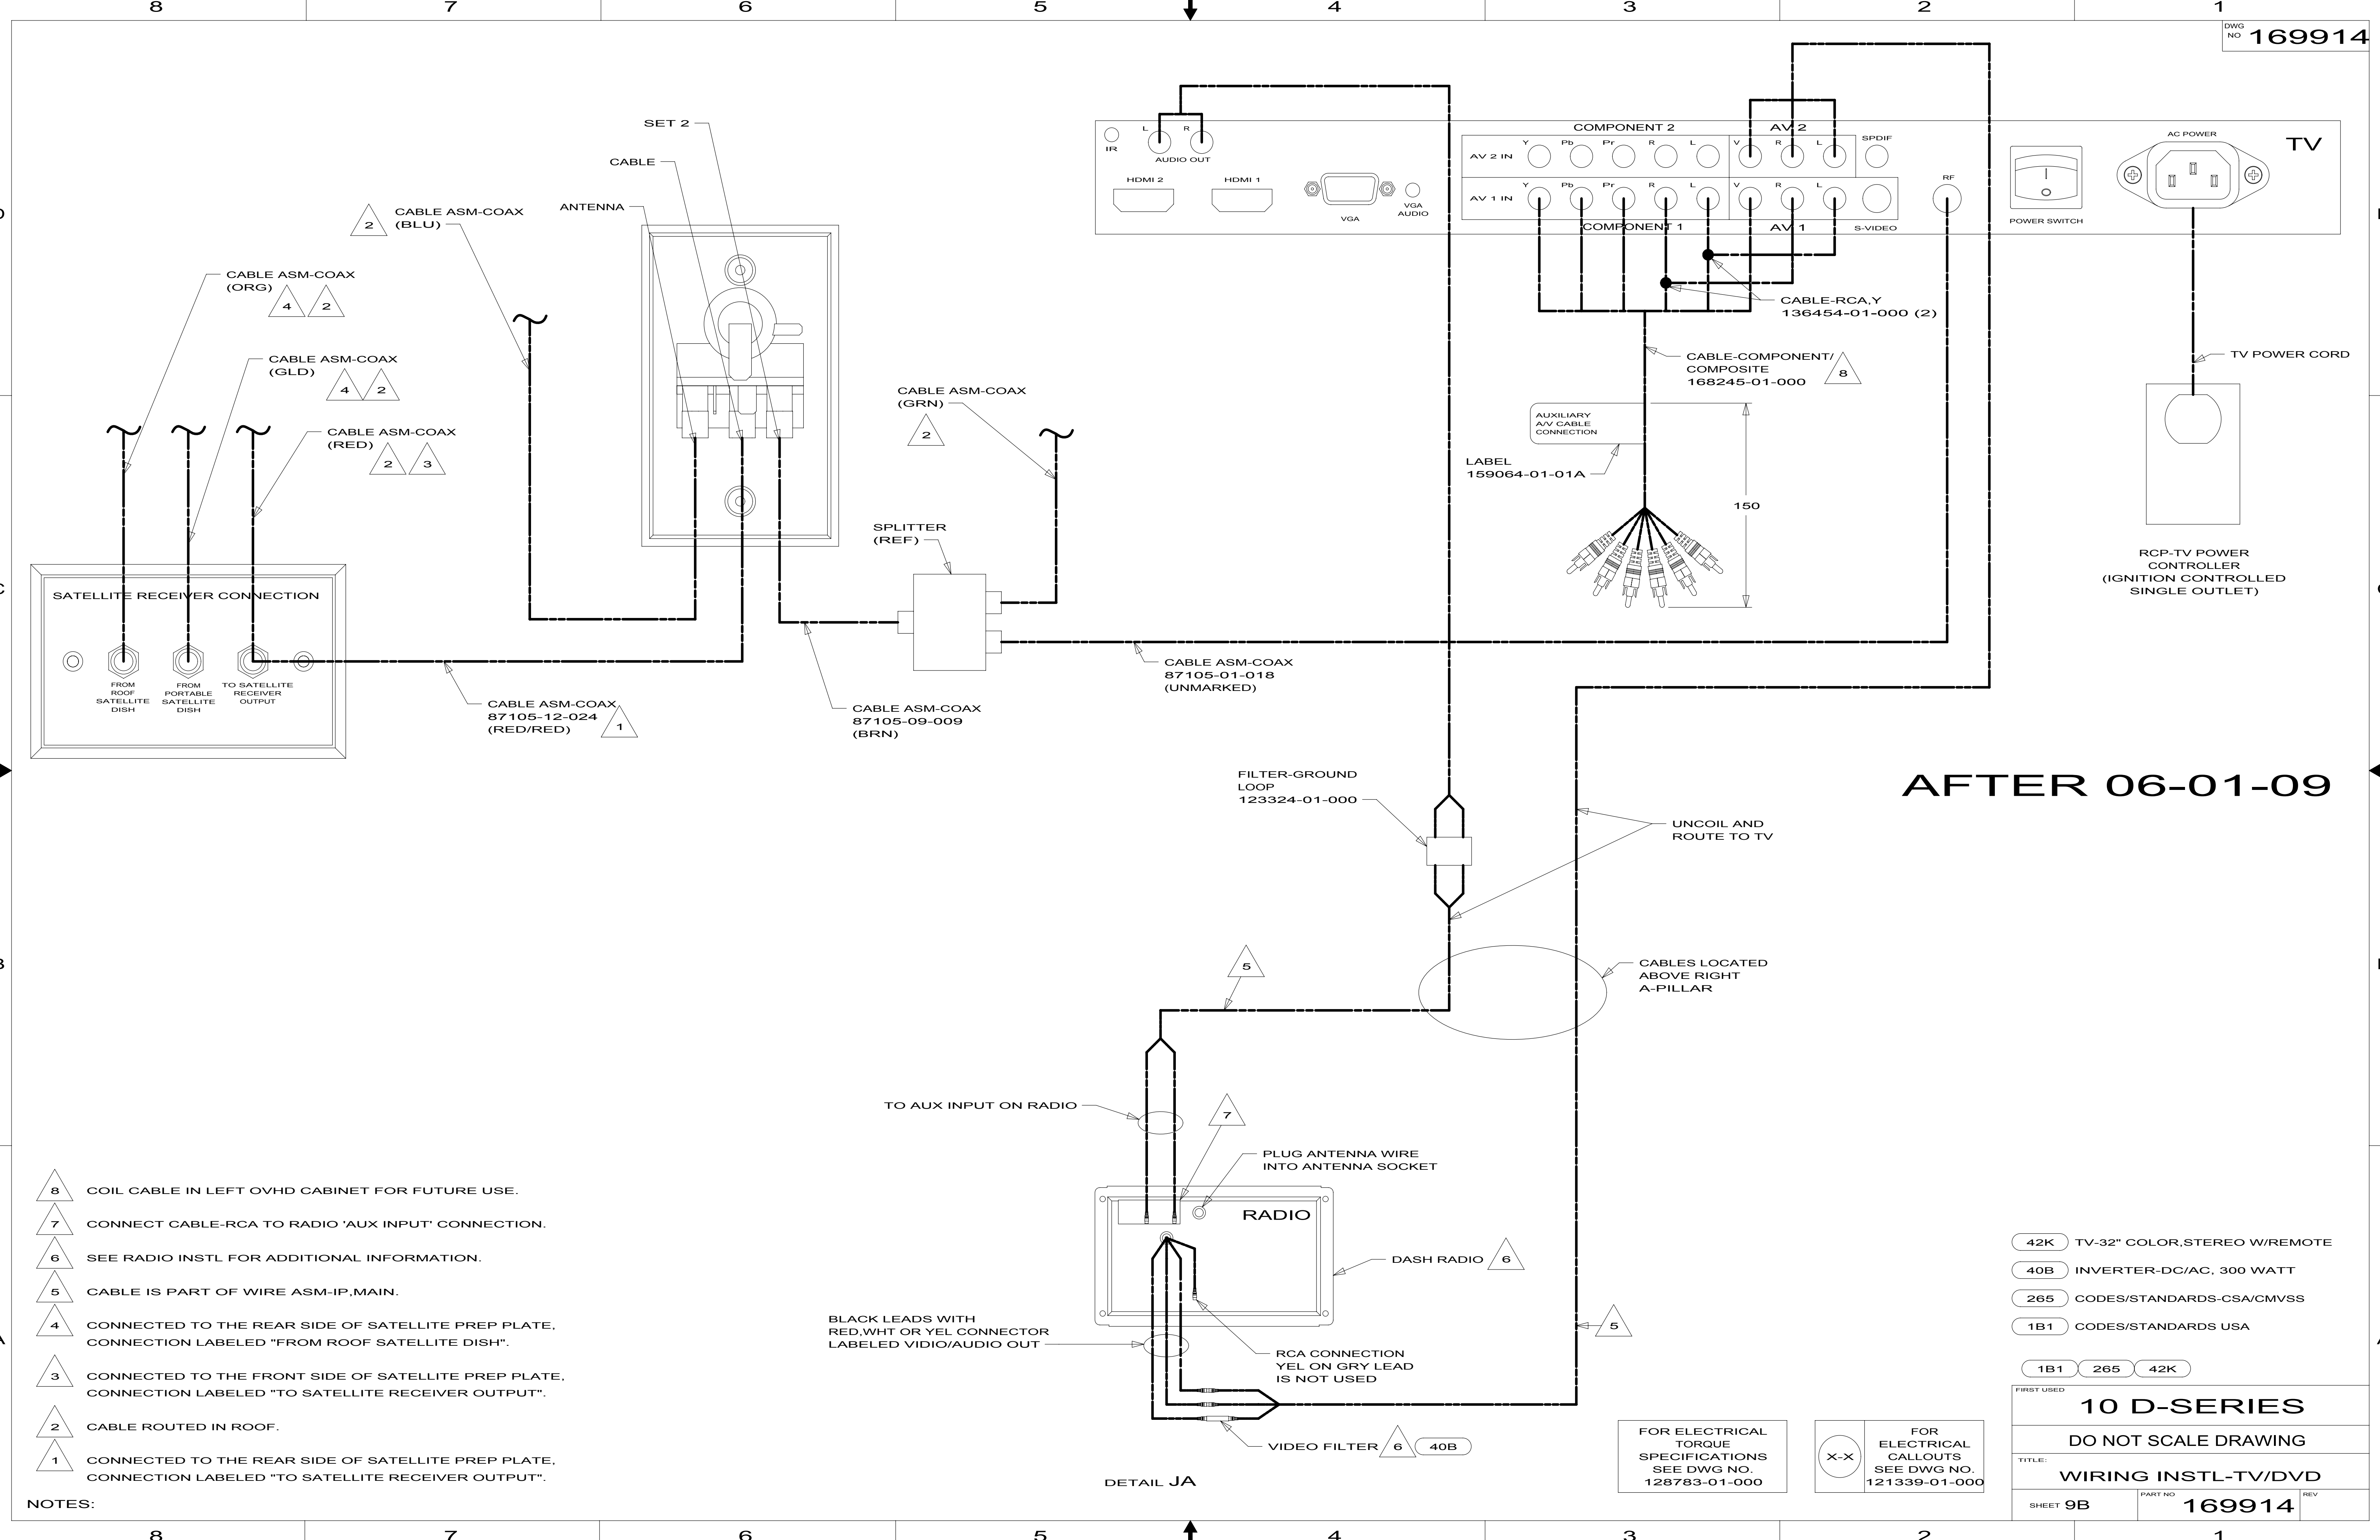

- NOTES:
- 8 COIL CABLE IN LEFT OVHD CABINET FOR FUTURE USE.
 - 7 CONNECT CABLE-RCA TO RADIO 'AUX INPUT' CONNECTION.
 - 6 SEE RADIO INSTL FOR ADDITIONAL INFORMATION.
 - 5 CABLE IS PART OF WIRE ASM-IP,MAIN.
 - 4 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED "FROM ROOF SATELLITE DISH".
 - 3 CONNECTED TO THE FRONT SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED "TO SATELLITE RECEIVER OUTPUT".
 - 2 CABLE ROUTED IN ROOF.
 - 1 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED "TO SATELLITE RECEIVER OUTPUT".


DETAIL JA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 42K TV-32" COLOR,STEREO W/REMOTE
- 40B INVERTER-DC/AC, 300 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-TV/DVD		
SHEET 9B	PART NO 169914	REV

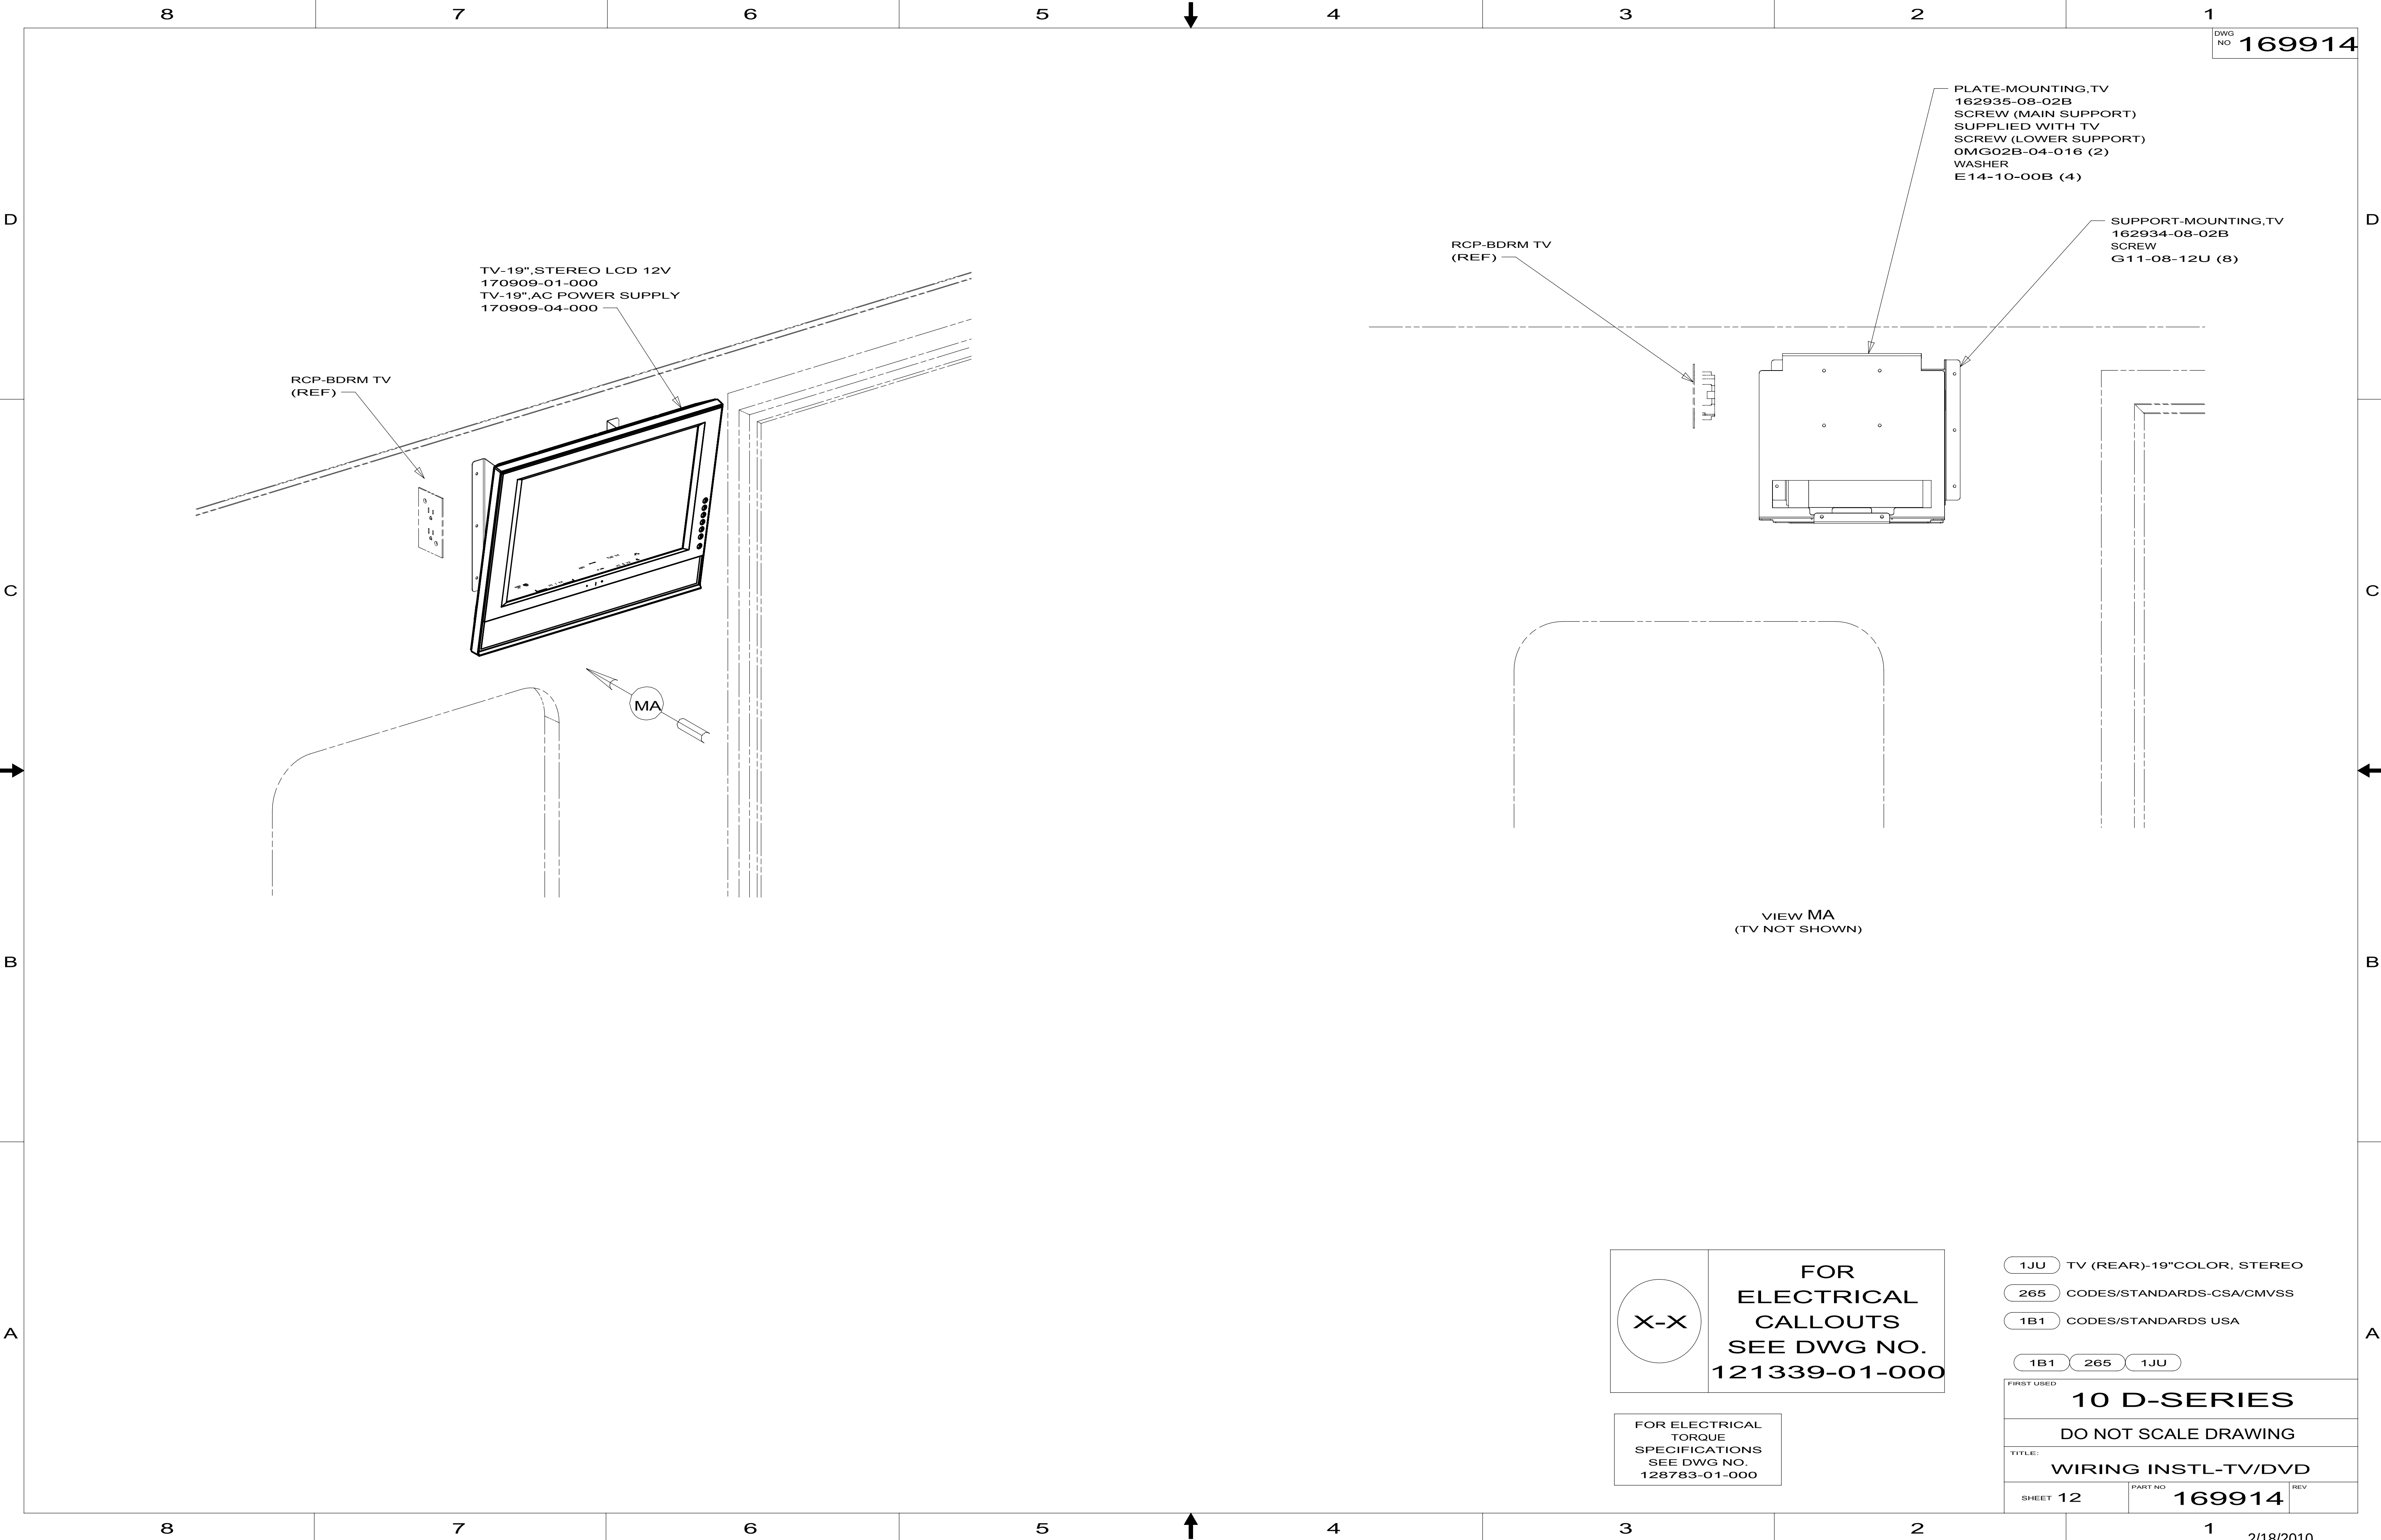

DWG NO. 169914

PLATE-MOUNTING,TV
162935-08-02B
SCREW (MAIN SUPPORT)
SUPPLIED WITH TV
SCREW (LOWER SUPPORT)
OMG02B-04-016 (2)
WASHER
E14-10-00B (4)

SUPPORT-MOUNTING,TV
162934-08-02B
SCREW
G11-08-12U (8)

TV-19",STEREO LCD 12V
170909-01-000
TV-19",AC POWER SUPPLY
170909-04-000

RCP-BDRM TV
(REF)

RCP-BDRM TV
(REF)

VIEW MA
(TV NOT SHOWN)

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

1JU TV (REAR)-19"COLOR, STEREO
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265 1JU

FIRST USED		
10 D-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-TV/DVD		
SHEET 12	PART NO. 169914	REV

KEY	PART NUMBER	U/M	DESCRIPTION
	169154-01-700	EA	REMOTE - TV

169151-01-000, 169151-02-000
VENDOR NO.
RRMCGA667WJSA

KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	173556-01-700	EA REMOTE - SERVICE PACK	PSVCJE3208