



DRAWING NO.	FEATURE
173224-01	-----
173224-11	1B1 12D
173224-15	265 12D

RELEASE		REV	DATE	DWG NO	173224
REV	ZONE	REVISION RECORD		DATE	DFT-ORIG

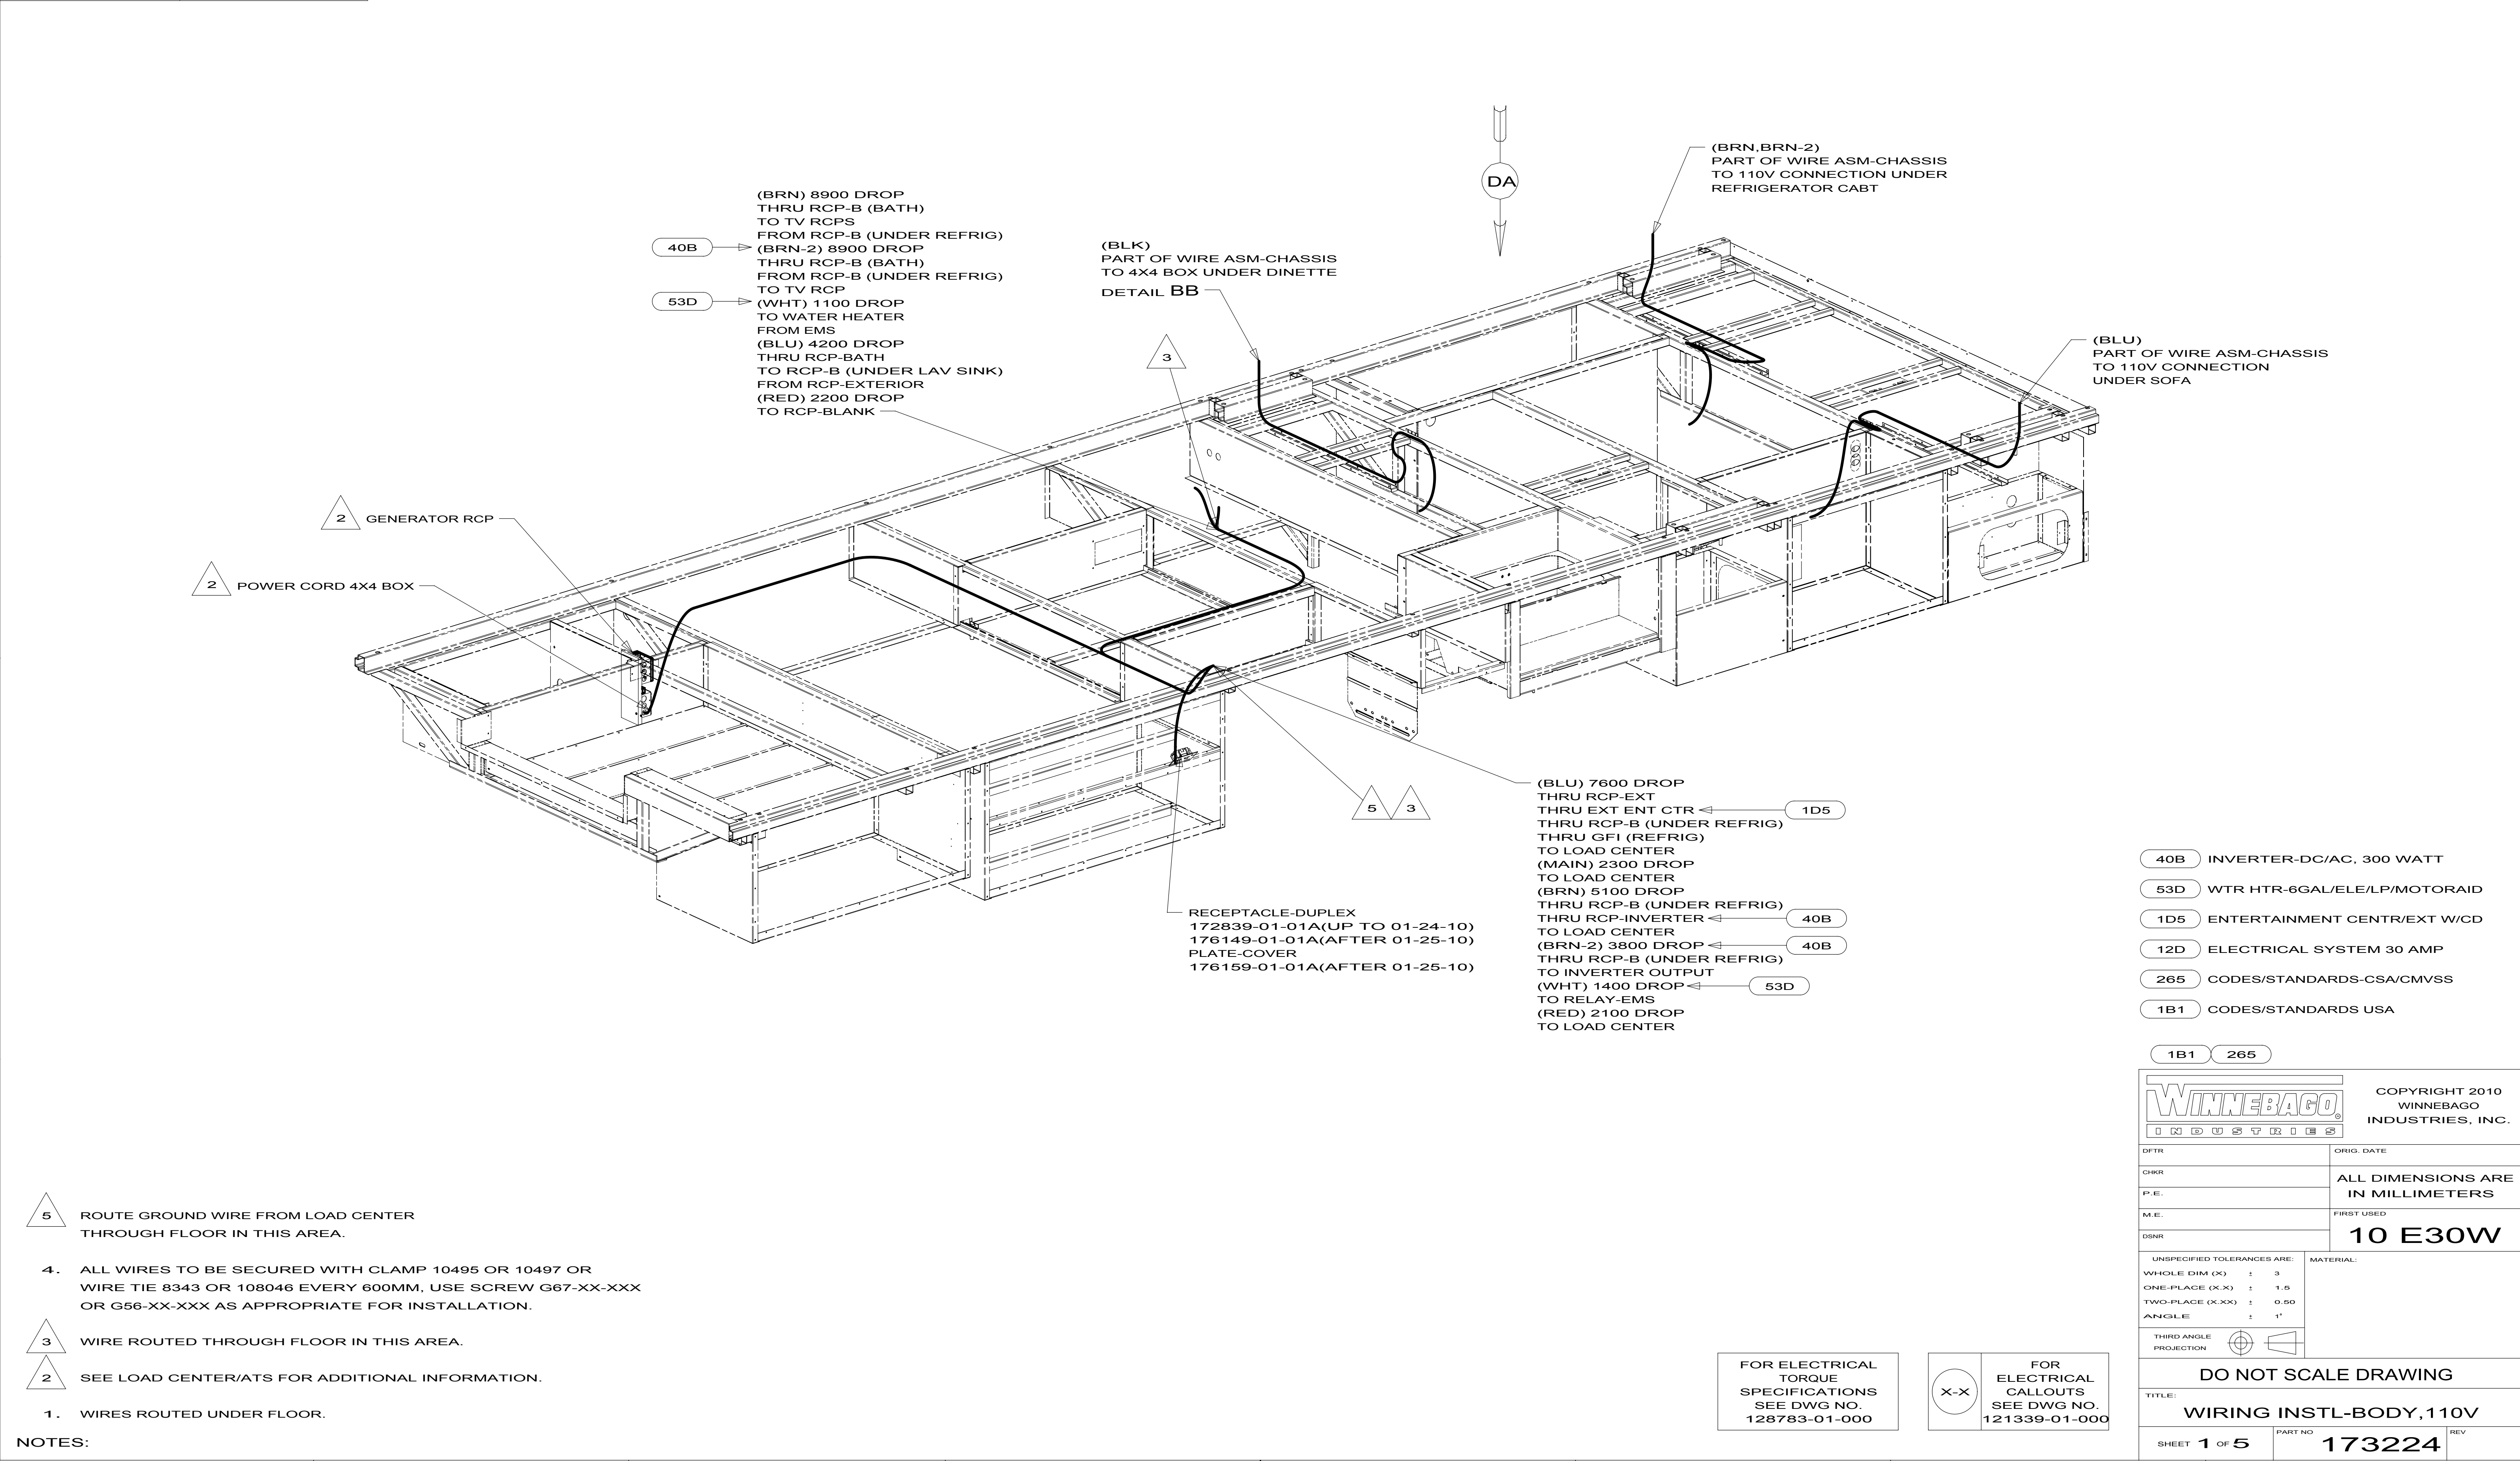

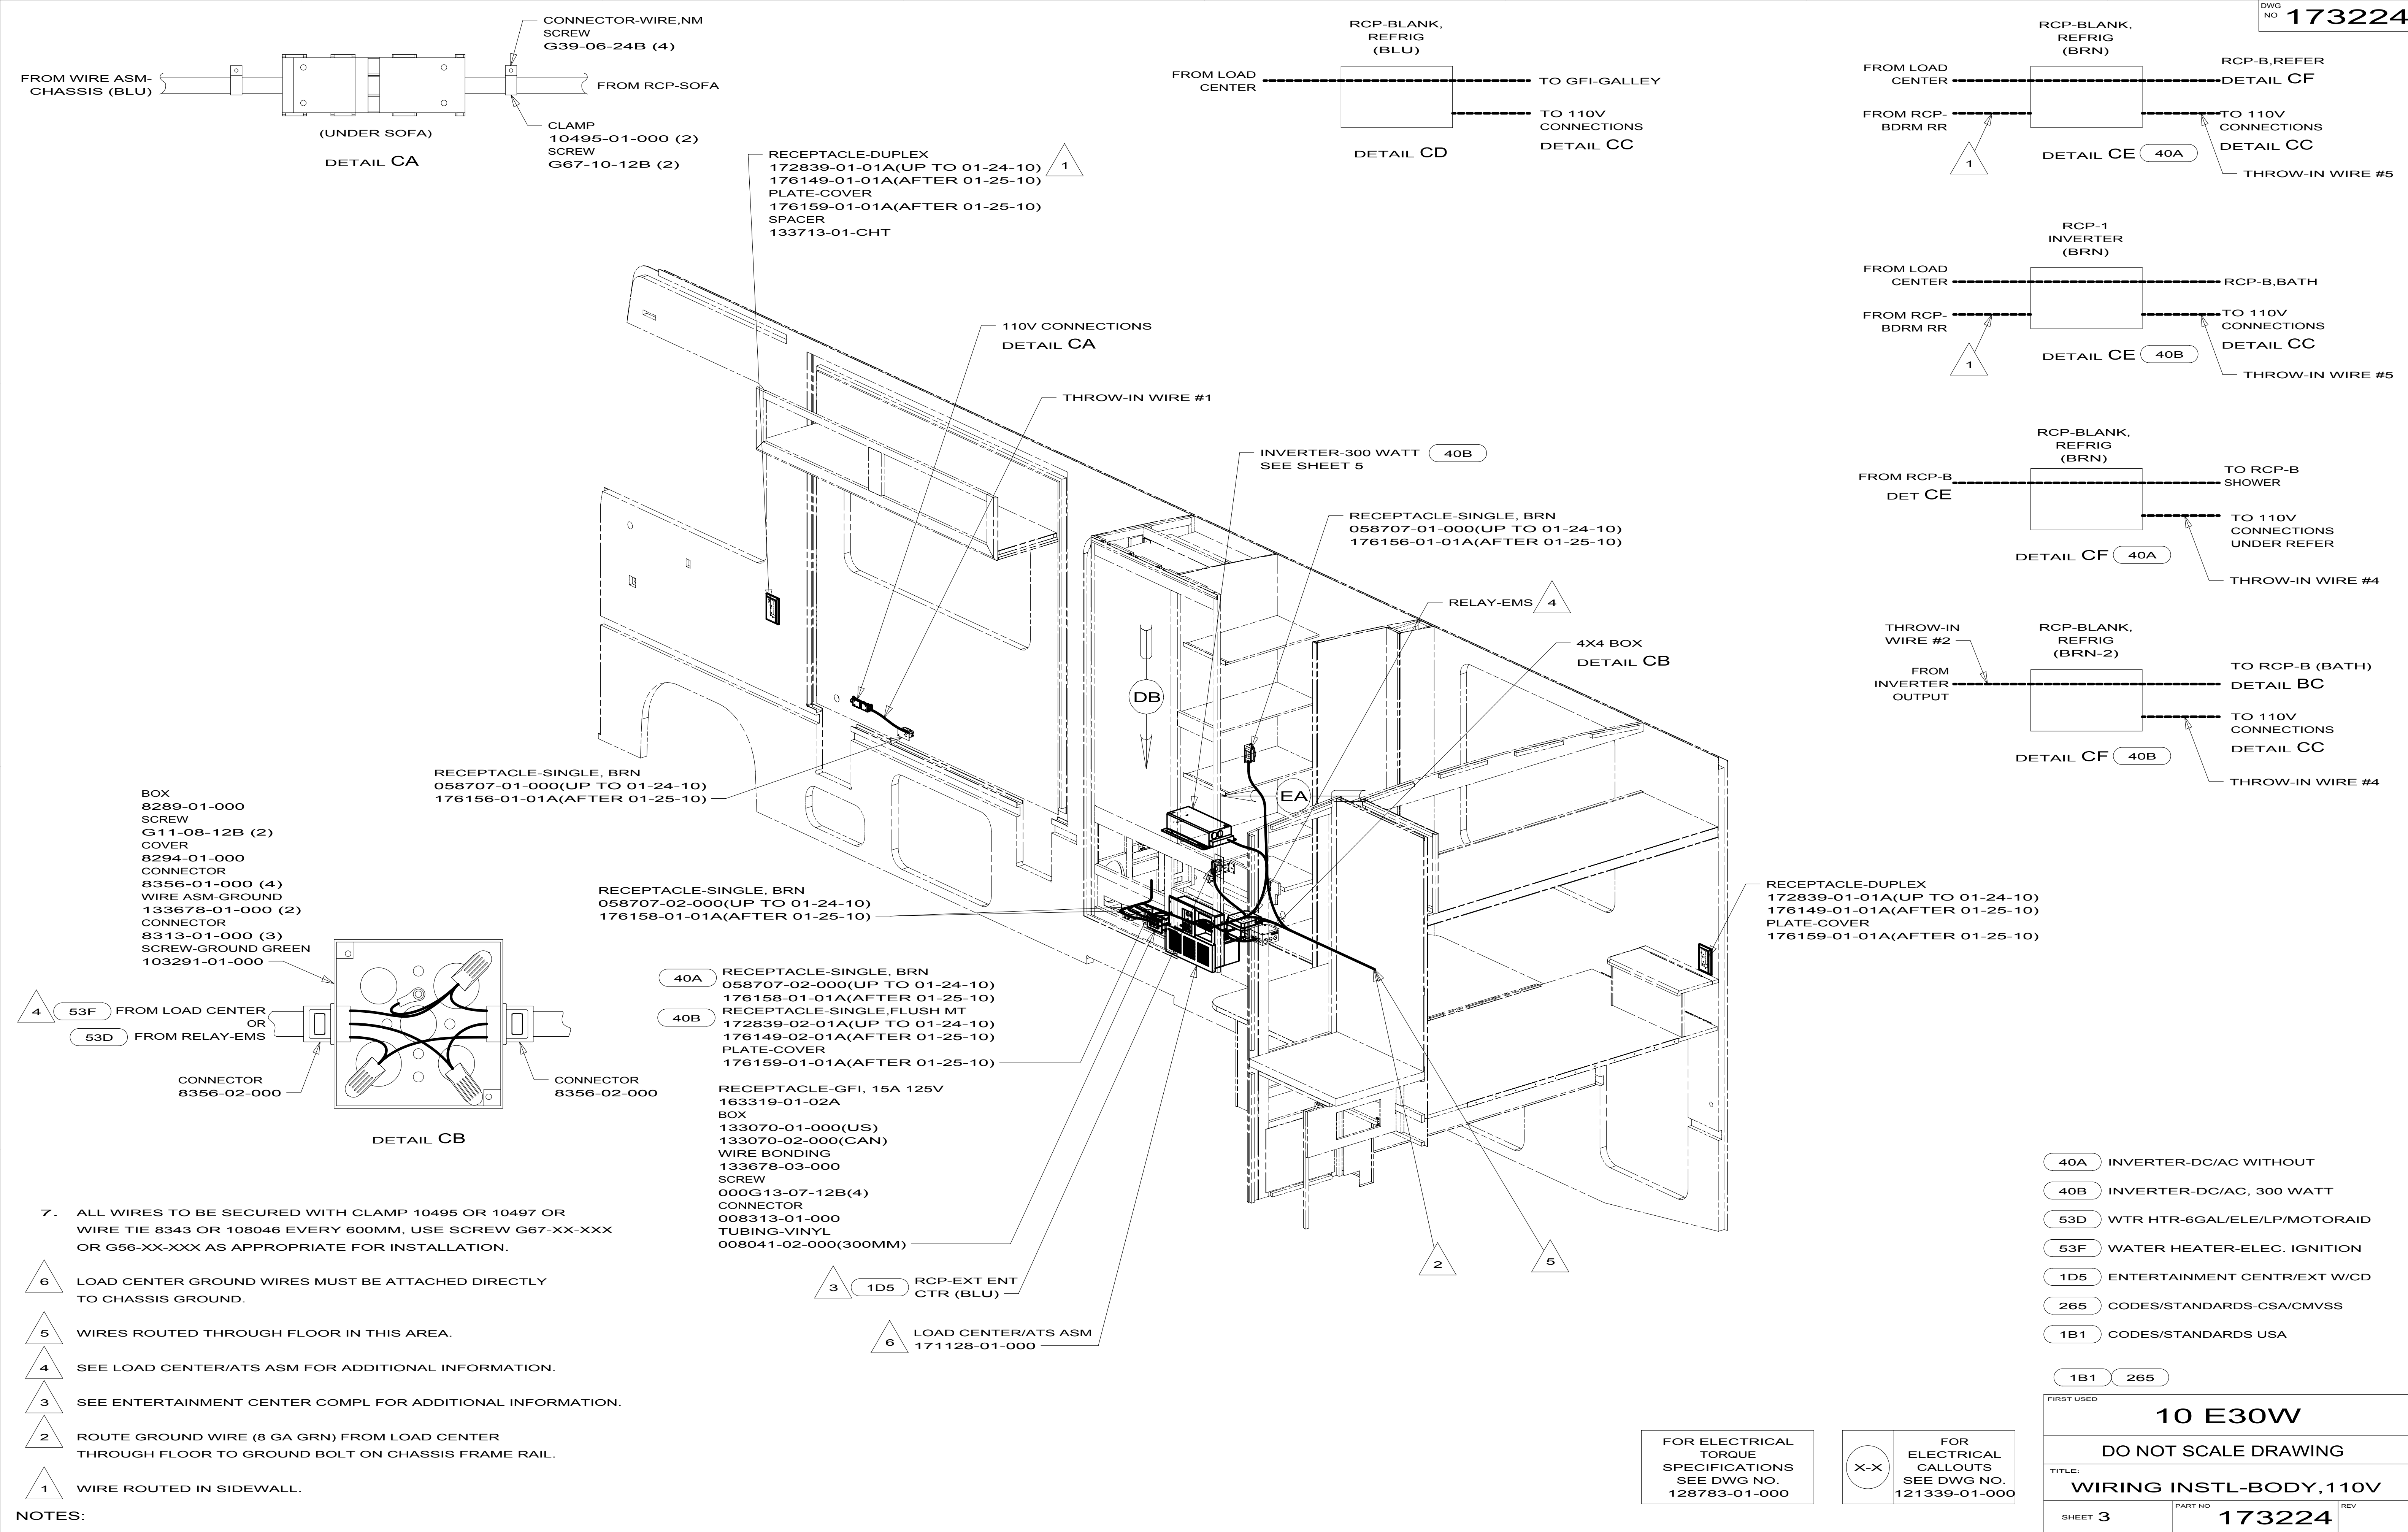

D

C

B

A

D

C

B

A

7. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
- 6 LOAD CENTER GROUND WIRES MUST BE ATTACHED DIRECTLY TO CHASSIS GROUND.
- 5 WIRES ROUTED THROUGH FLOOR IN THIS AREA.
- 4 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 3 SEE ENTERTAINMENT CENTER COMPL FOR ADDITIONAL INFORMATION.
- 2 ROUTE GROUND WIRE (8 GA GRN) FROM LOAD CENTER THROUGH FLOOR TO GROUND BOLT ON CHASSIS FRAME RAIL.
- 1 WIRE ROUTED IN SIDEWALL.



NOTES:

- 40A INVERTER-DC/AC WITHOUT
- 40B INVERTER-DC/AC, 300 WATT
- 53D WTR HTR-6GAL/ELE/LP/MOTORAID
- 53F WATER HEATER-ELEC. IGNITION
- 1D5 ENTERTAINMENT CENTR/EXT W/CD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FIRST USED		
10 E30W		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 3	PART NO 173224	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

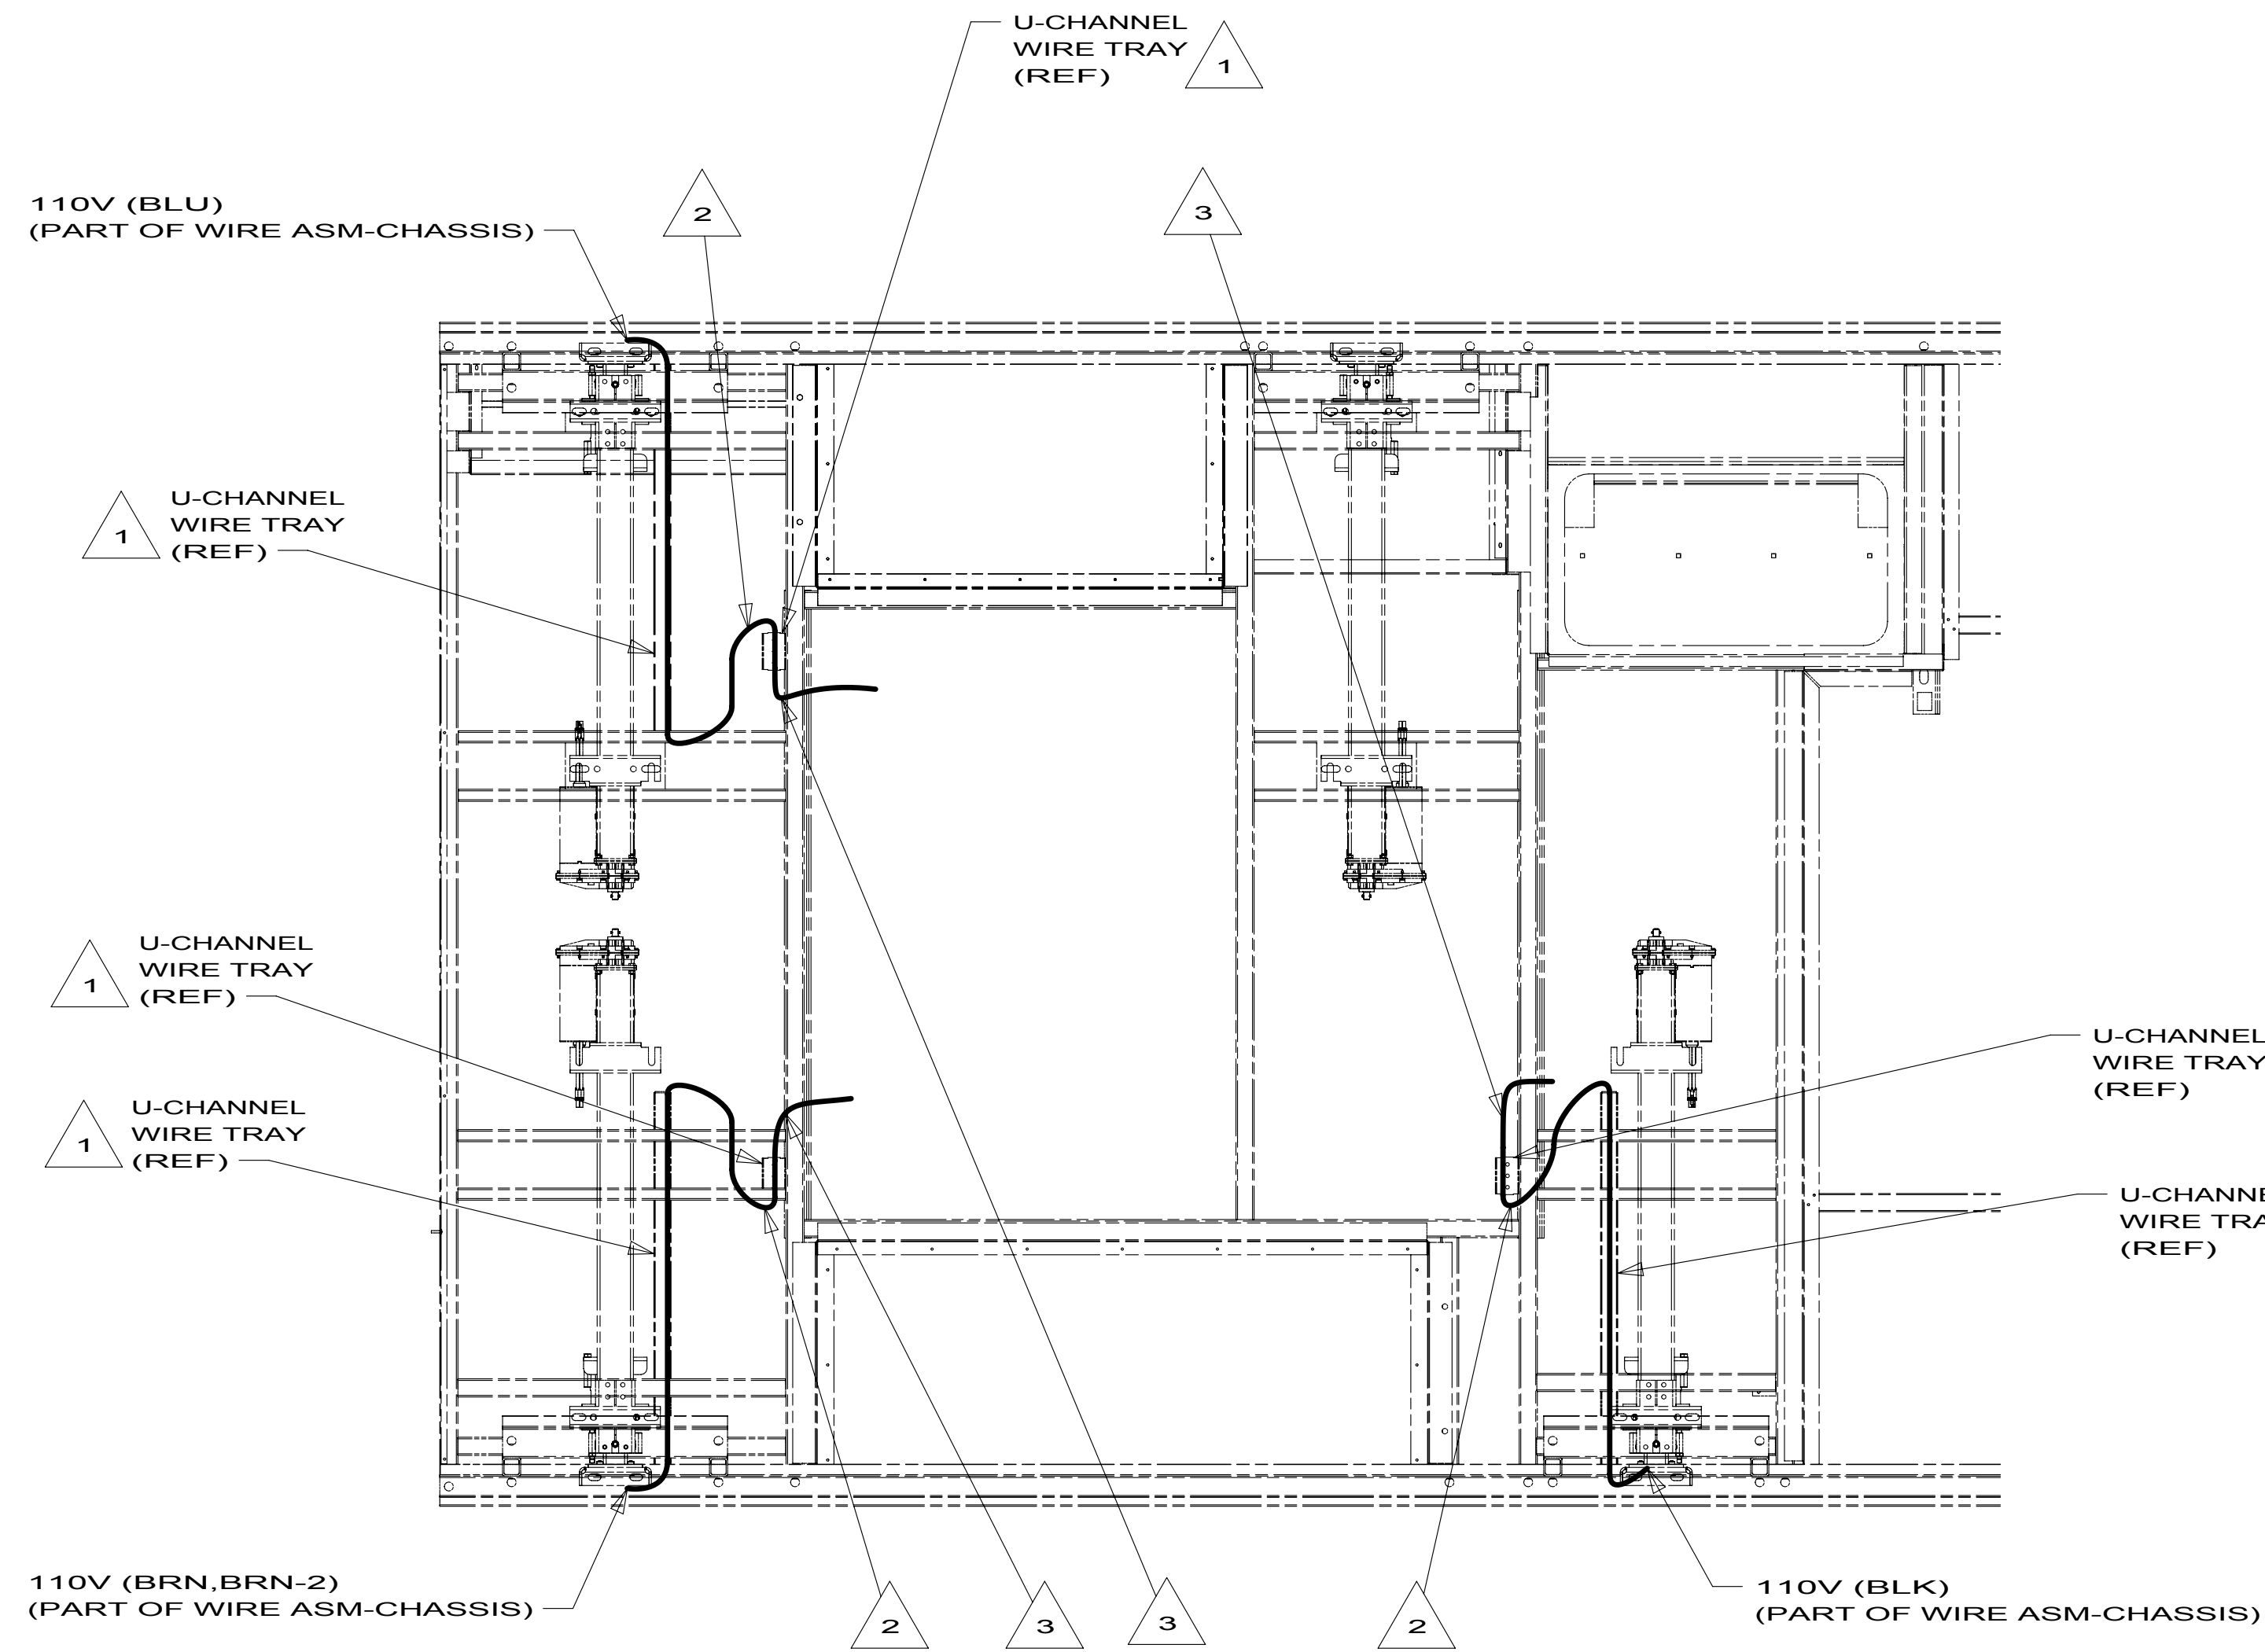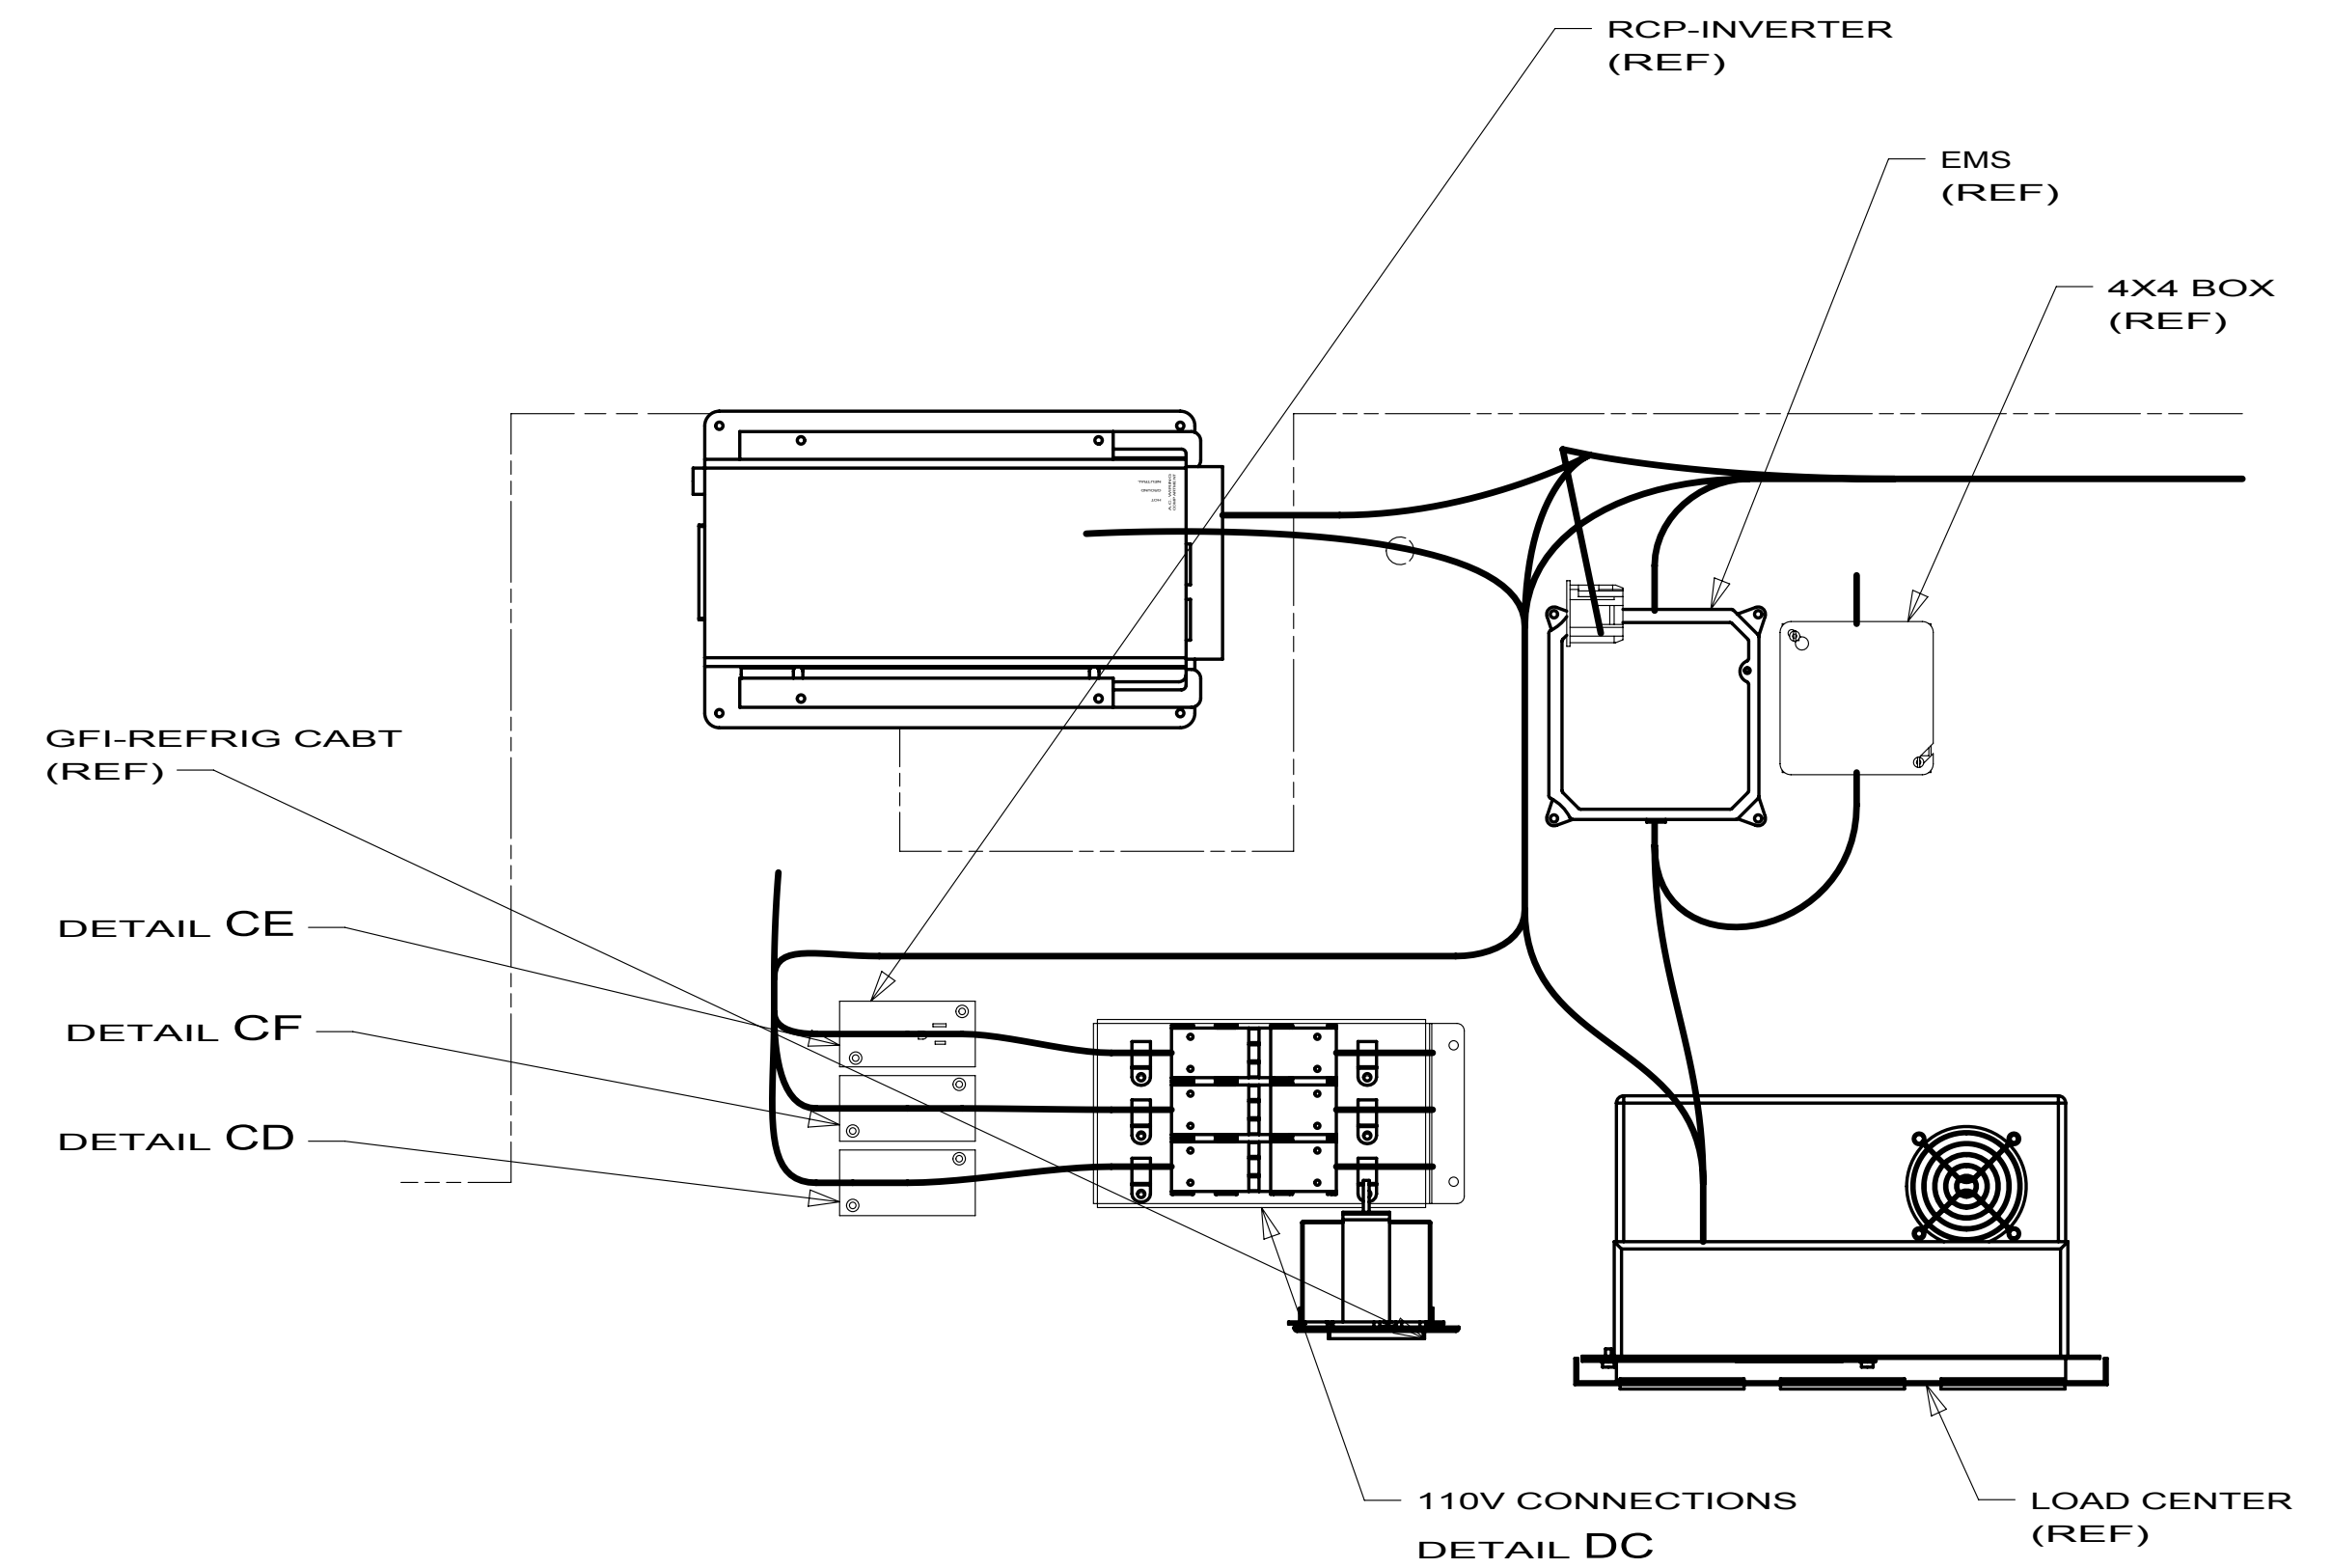[VIEW DA](#)

VIEW DB

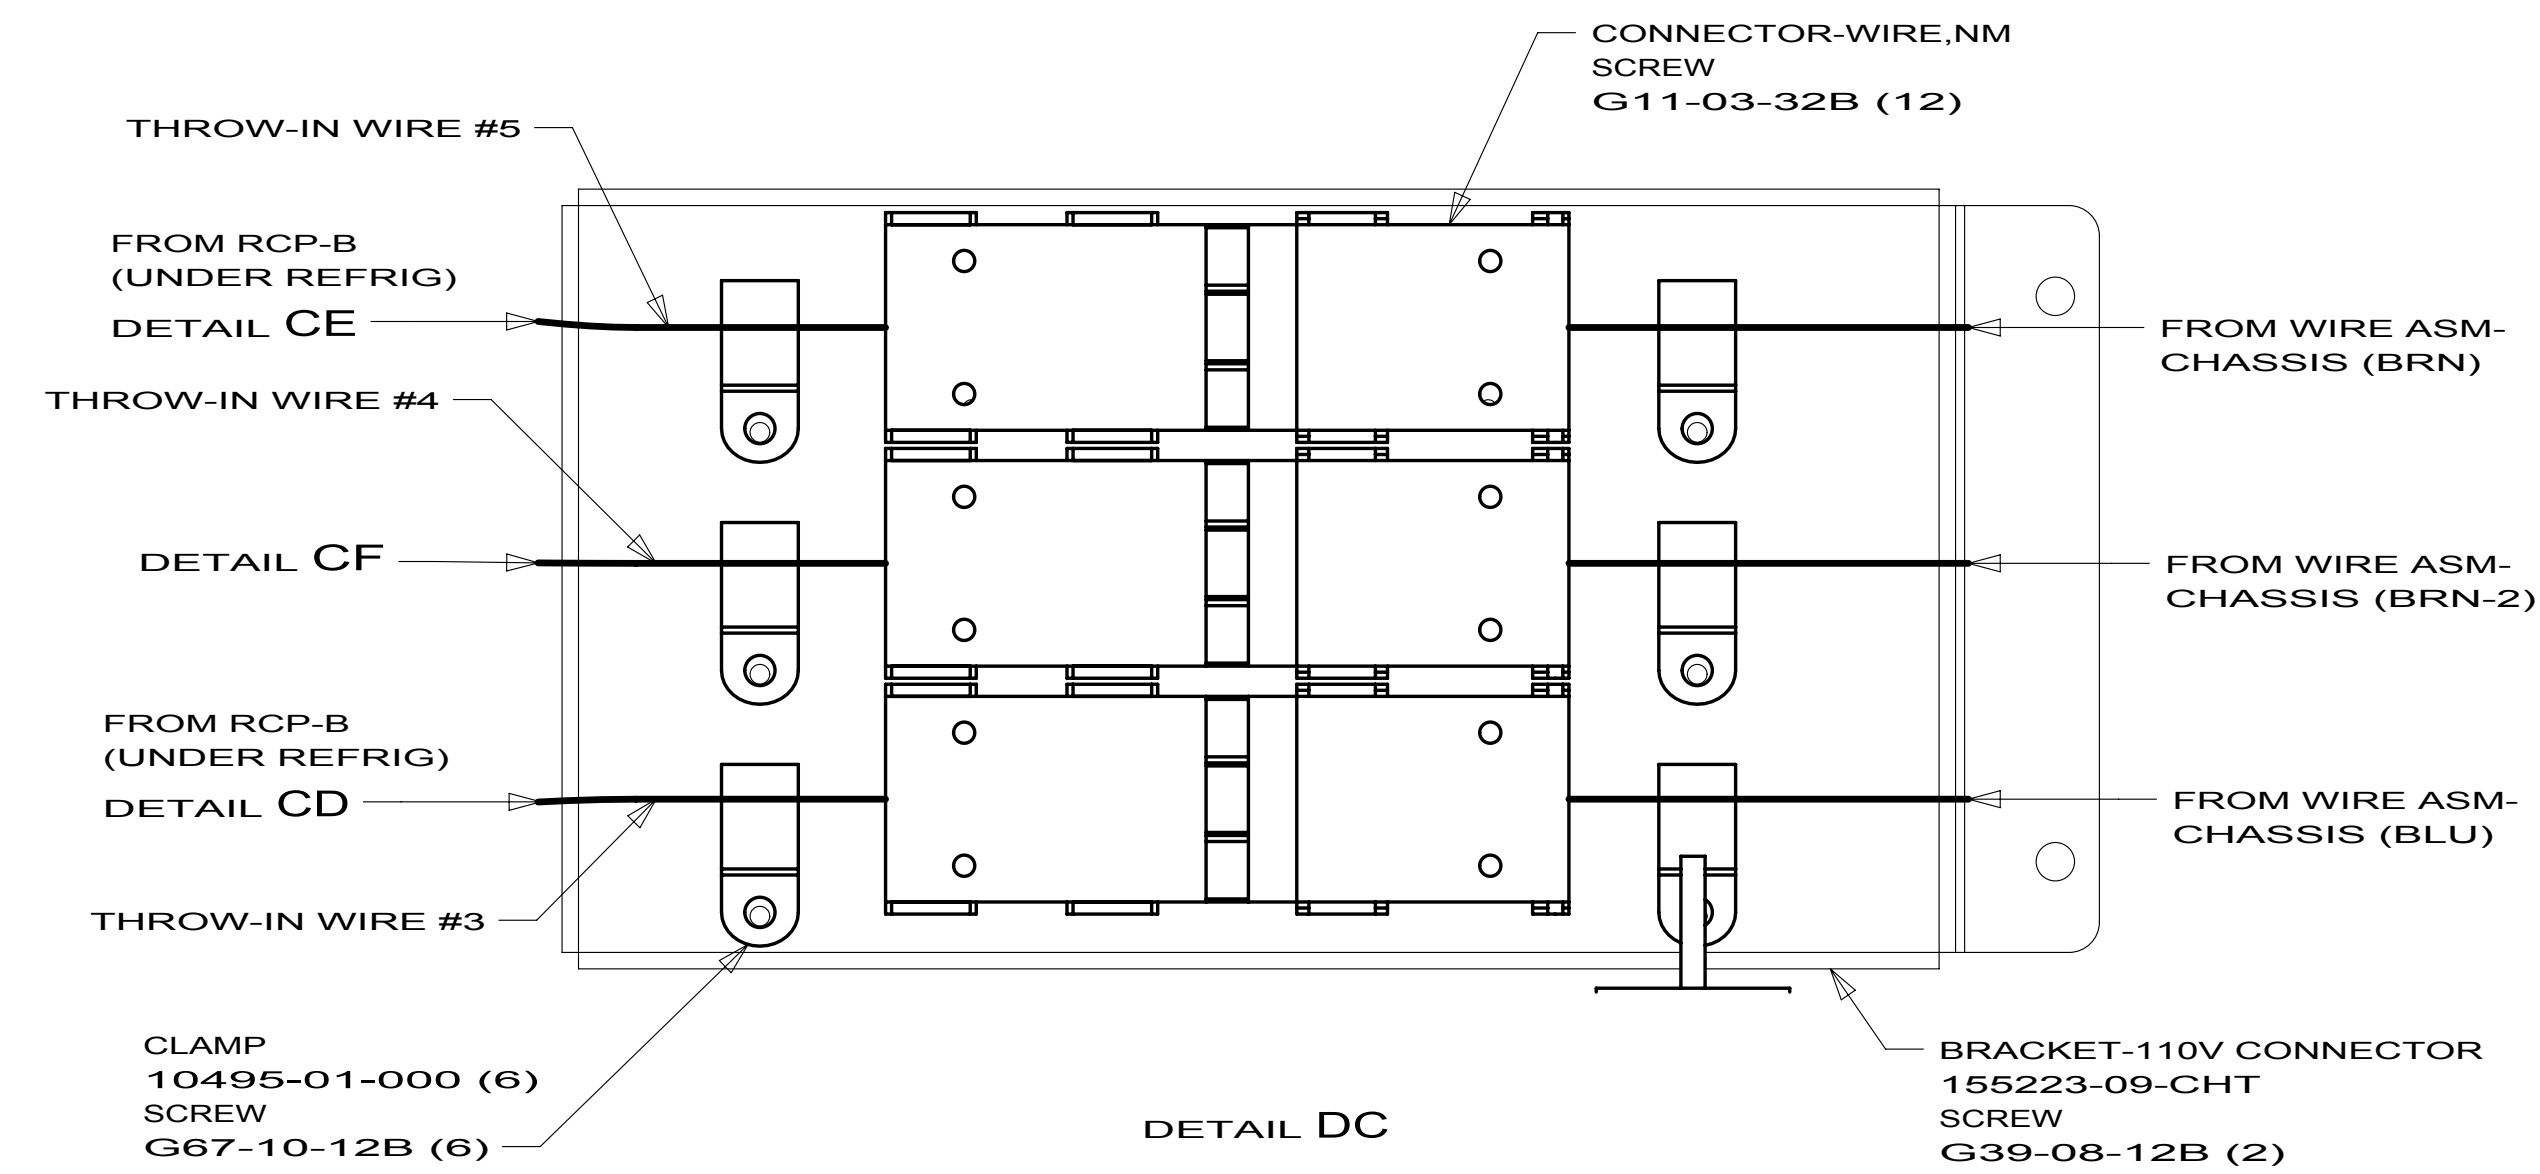

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265


FIRST USED

10 E30W

DO NOT SCALE DRAWING

TITLE:
WIRING INSTL-BODY,110V

SHEET 4	PART NO 173224	REV
---------	----------------	-----

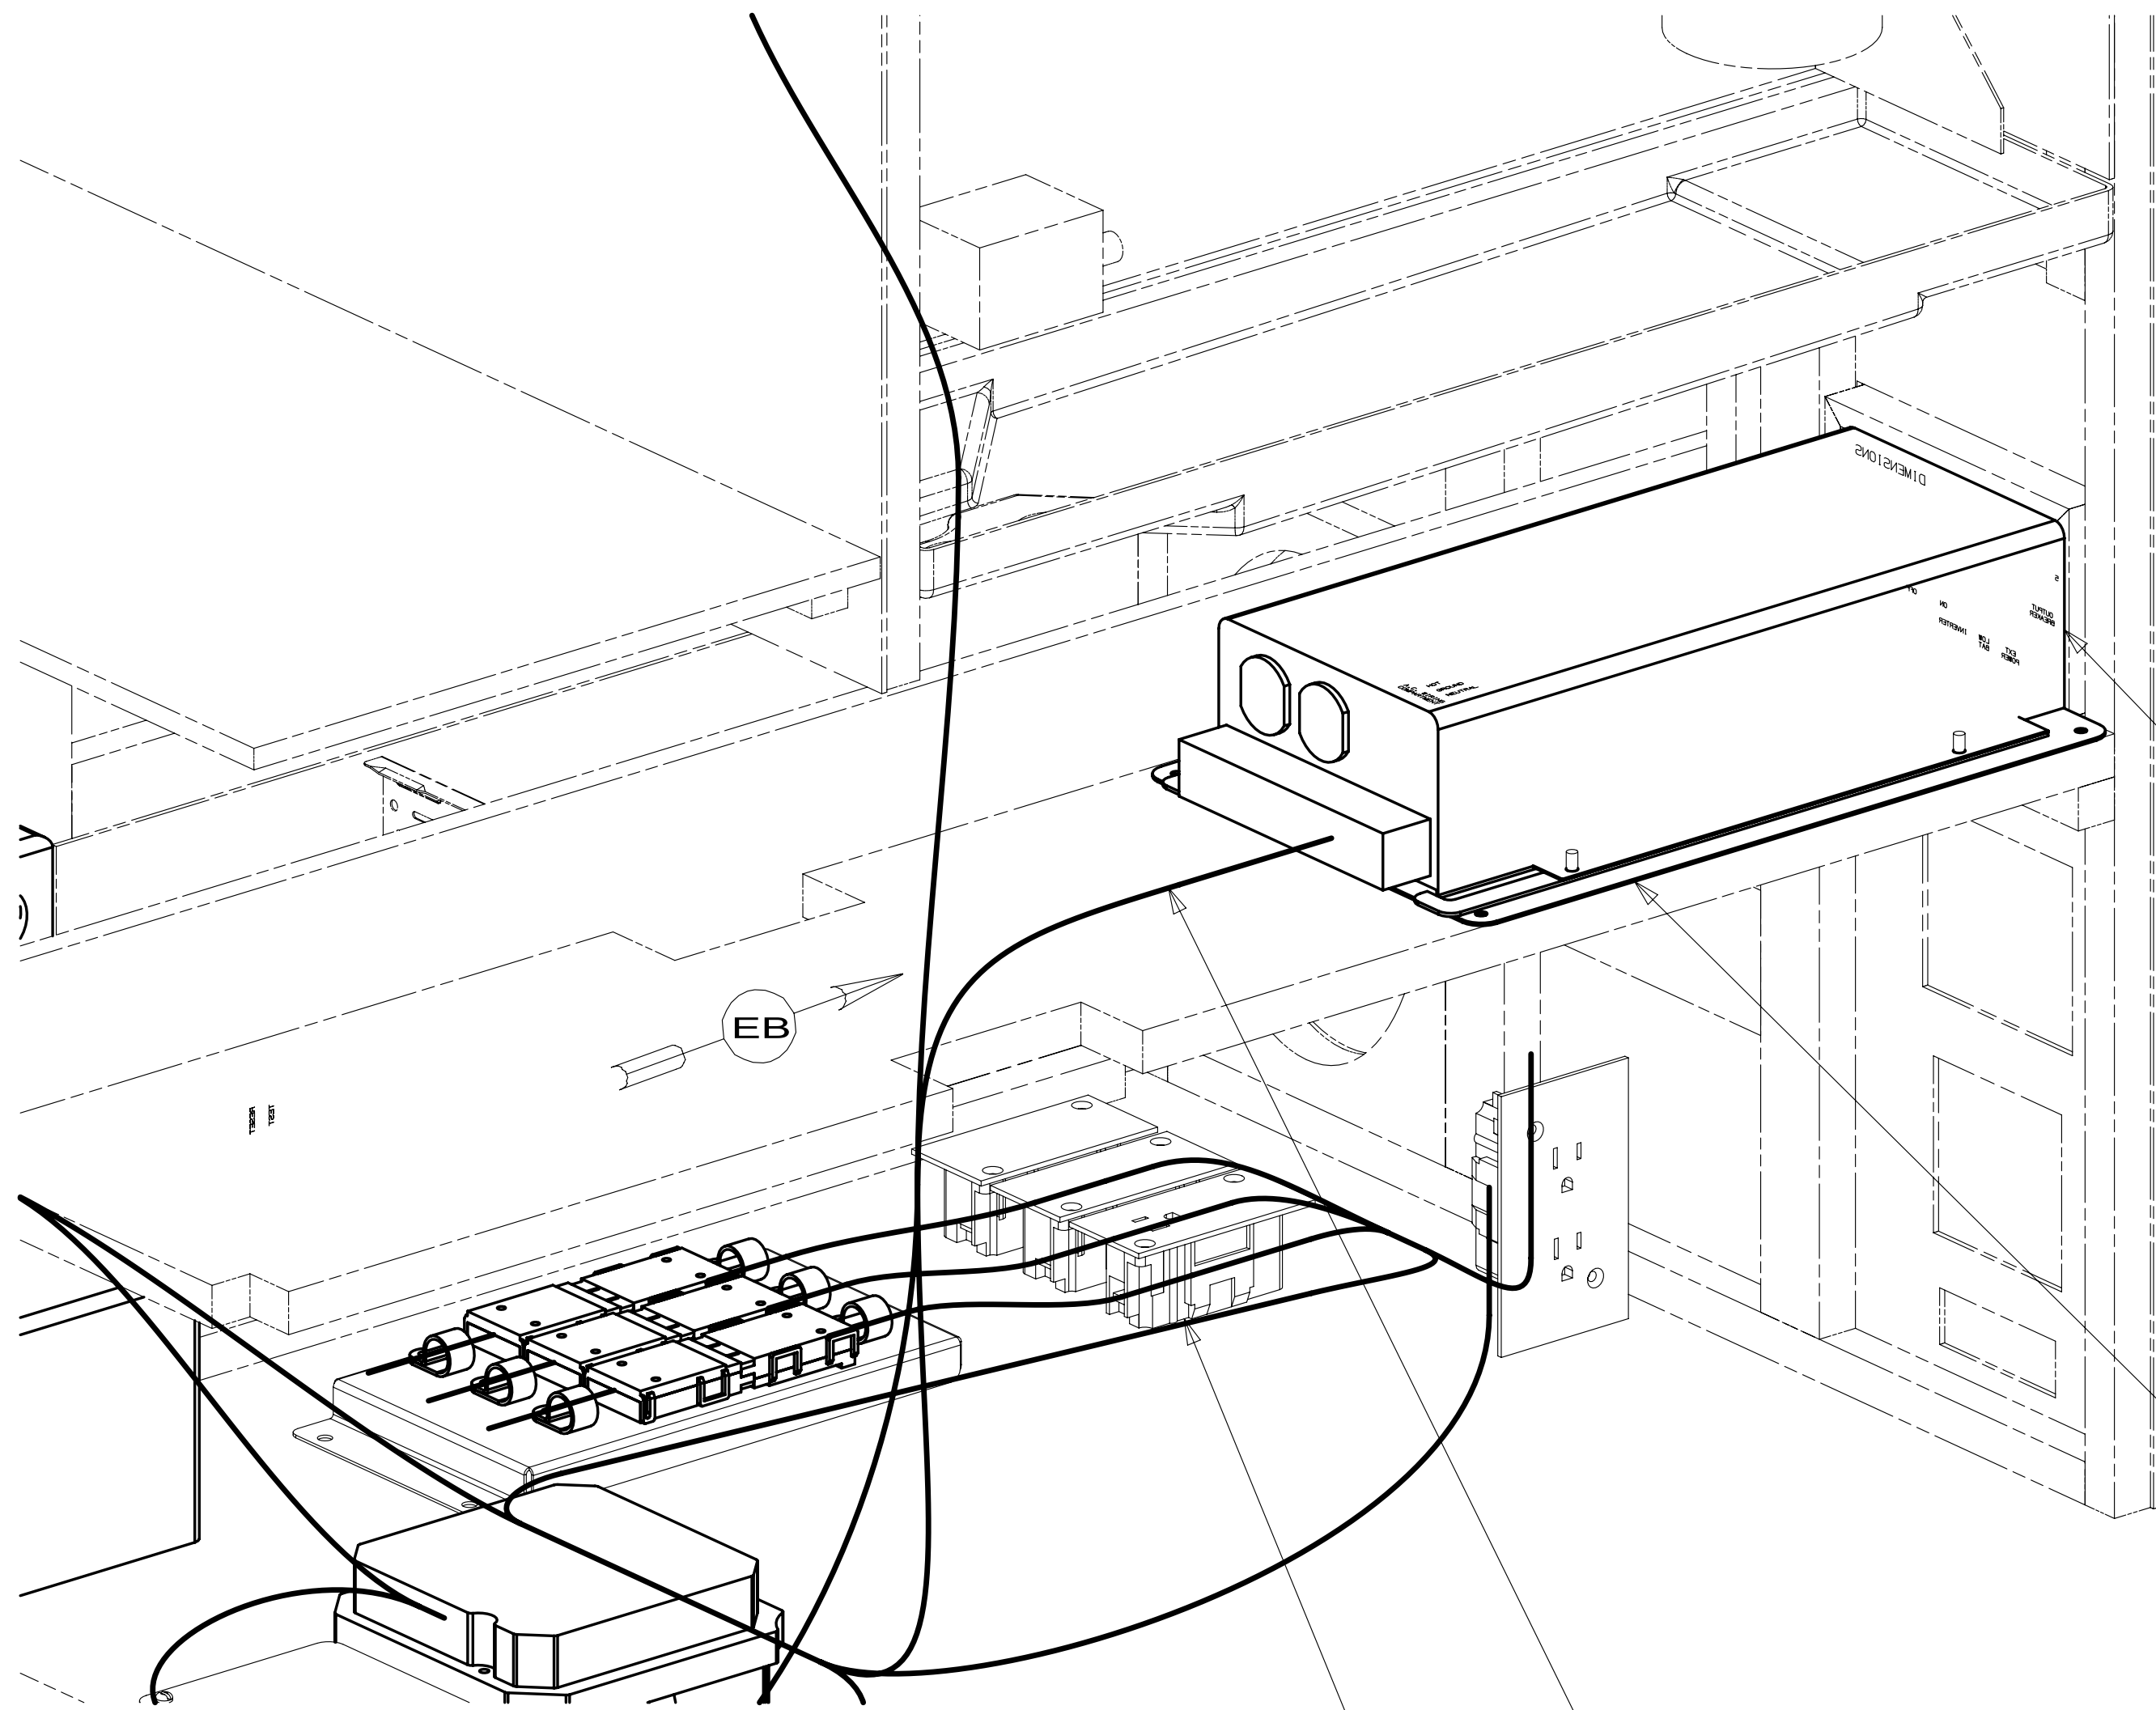

INVERTER-300 WATT
099048-04-000(UP TO 09-27-09)
099048-05-000(AFTER 09-28-09)

PANEL ASM-INVERTER
165488-01-CHT
SCREW
G67-08-12B (6)
(LINE UP WITH PLYWOOD
BASE ON CABINET)

(BRN-2)
TO INVERTER OUTPUT
THROW IN WIRE #2 (REF)

(BRN)
RCP-3 INVERTER
(REF)

VIEW EA

WIRE ASM-
CHASSIS

GRN
BLK

WHT

RED

GROUND
(CIRCUIT CP
FROM WIRE
ASM-CHASSIS)

110V OUTPUT
(LOCATED INSIDE
INVERTER)

(BRN-2)
THROW IN WIRE #2
(REF)

POWER CORD
(PLUG INTO
RCP-1 INVERTER
(BRN))

DETAIL EB

1 WHEN CONNECTING 12VDC POWER WIRES MAKE SURE THAT
THE POLARITY IS CORRECT. (BLK-RED, GRN-WHT)

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


40B INVERTER-DC/AC, 300 WATT
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA


1B1 265 40B

FIRST USED		
10 E30W		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 5	PART NO 173224	REV

KEY	PART NUMBER	U/M DESCRIPTION	083208-07-000 VENDOR NO.
	083208-06-701	EA CONVERTER ONLY (LOWER UNIT)	7345R

[illegible]

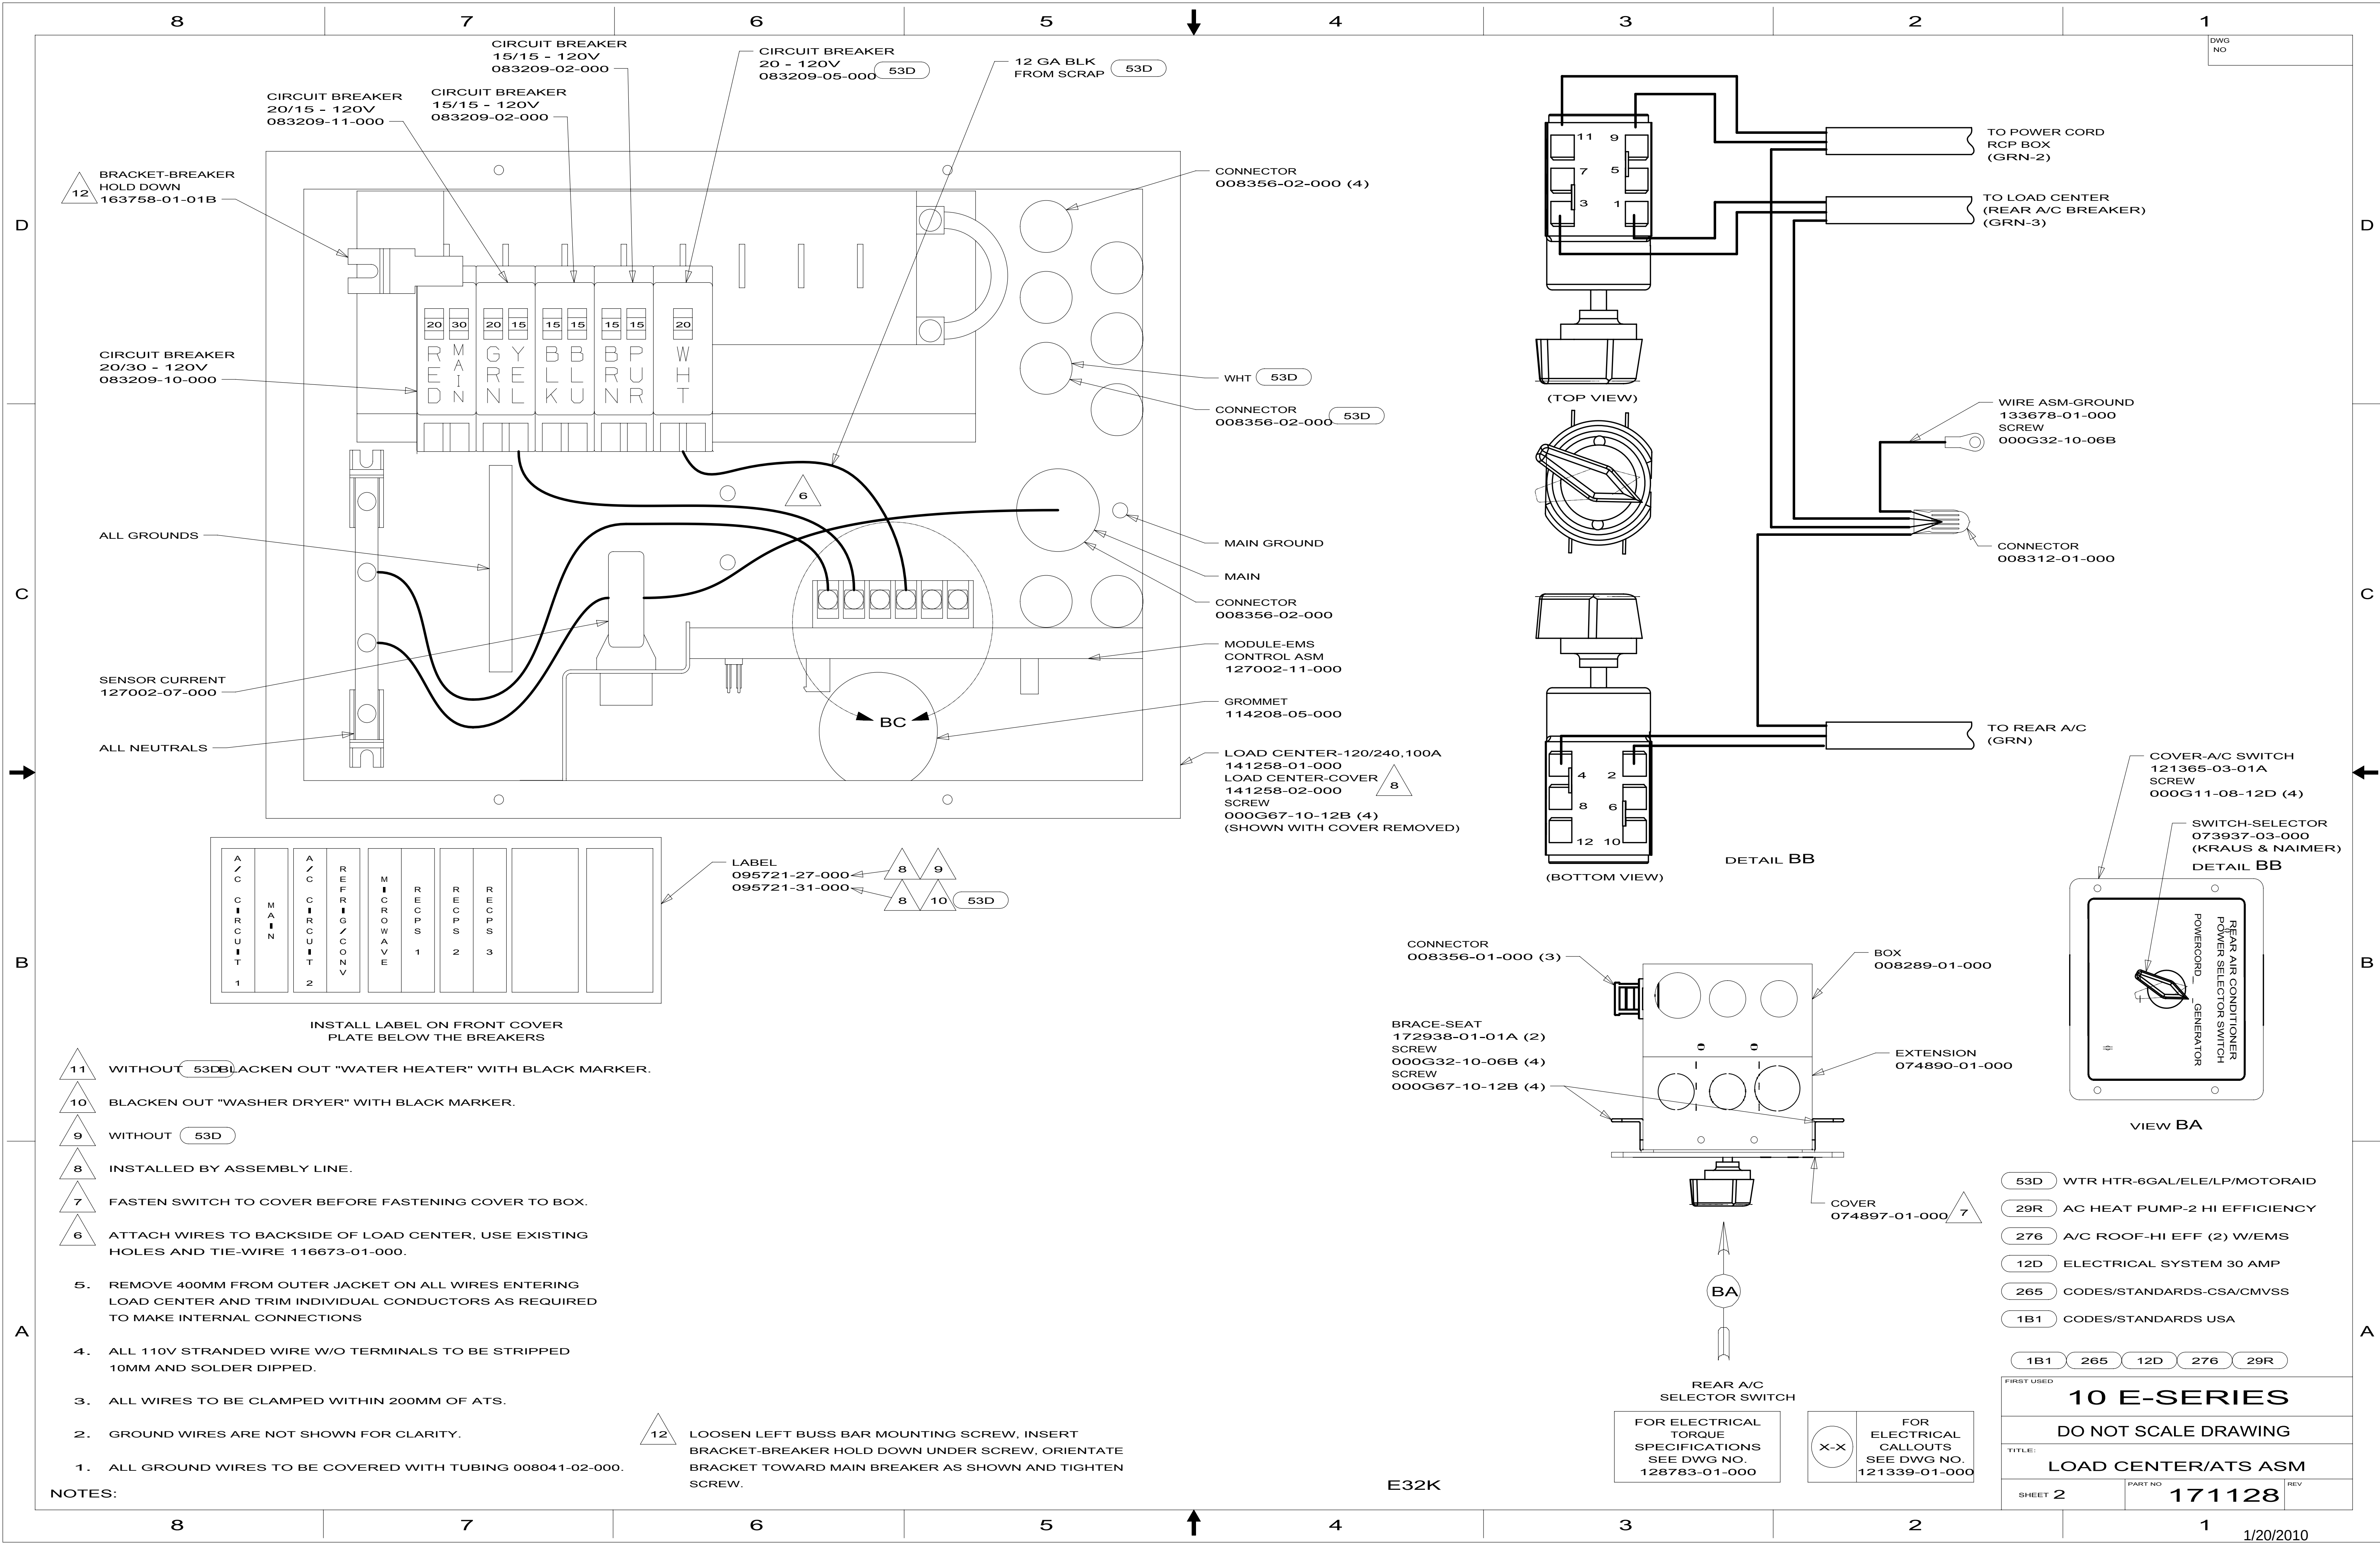


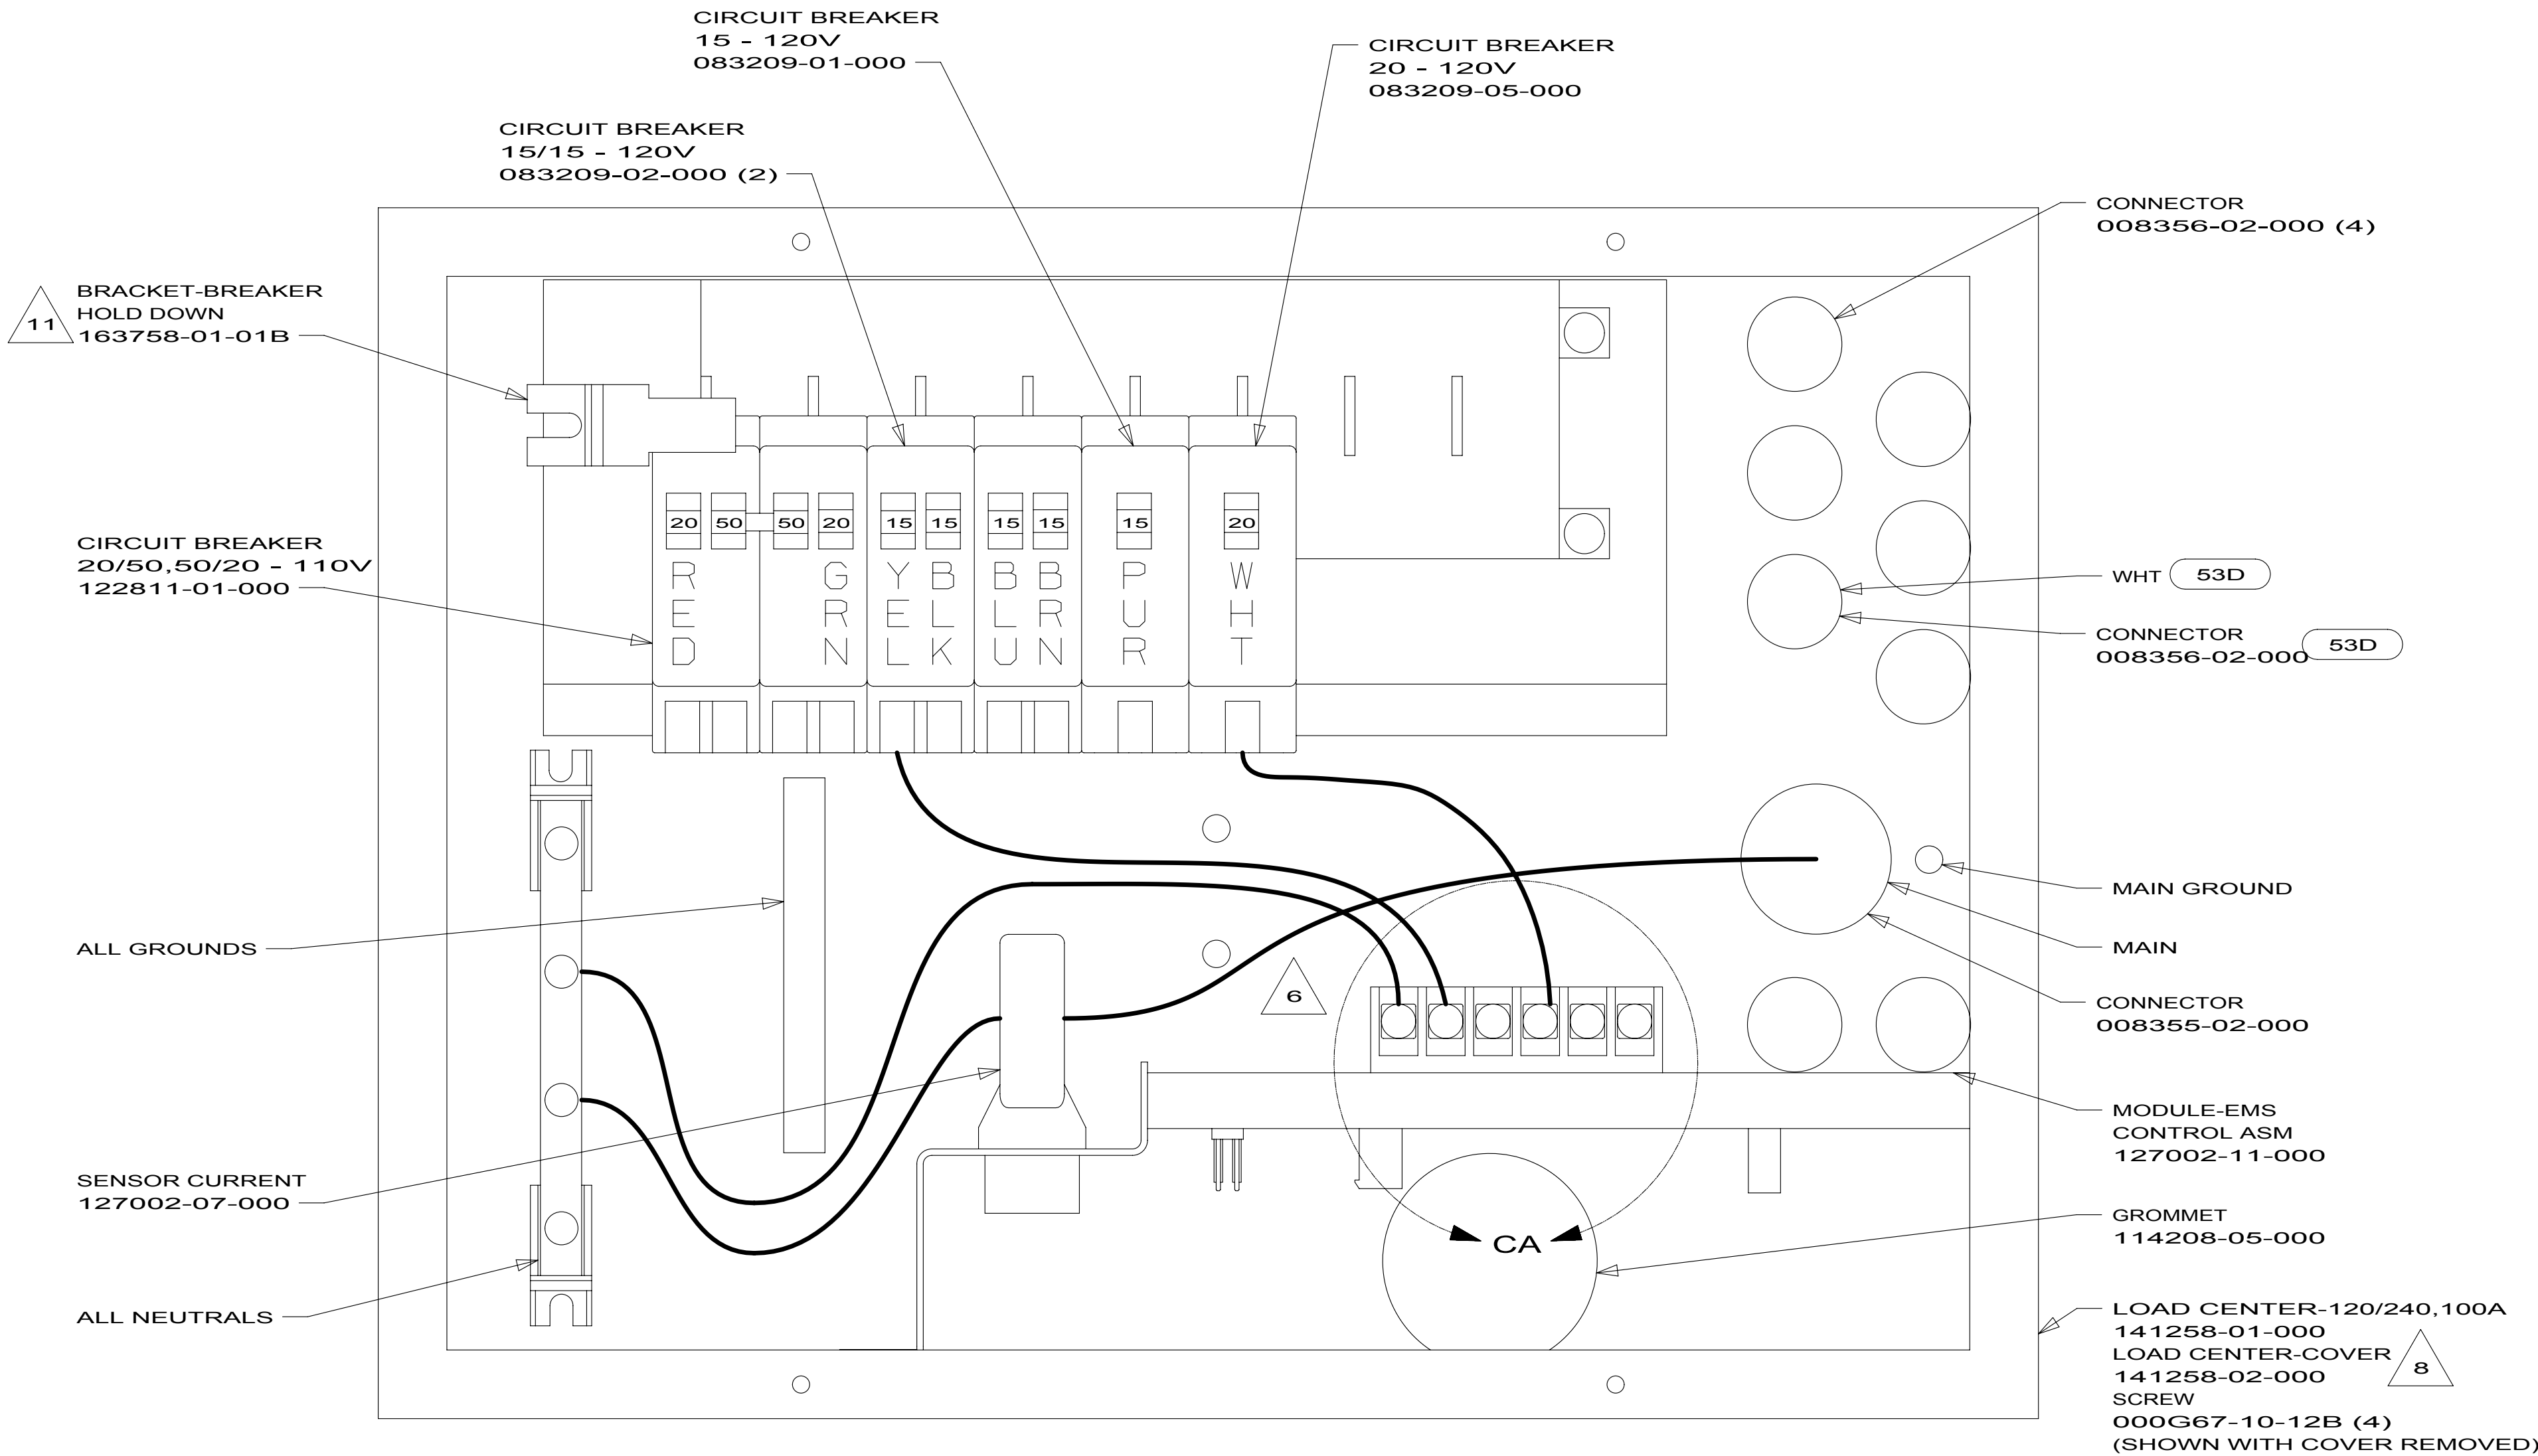

- 10 BLACKEN OUT "WASHER DRYER" WITH BLACK MARKER.
- 9 WITHOUT 53D
- 8 INSTALLED BY ASSEMBLY LINE.
- 7 FASTEN SWITCH TO COVER BEFORE FASTENING COVER TO BOX.
- 6 ATTACH WIRES TO BACKSIDE OF LOAD CENTER, USE EXISTING HOLES AND TIE-WIRE 116673-01-000.

5. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS
4. ALL 110V STRANDED WIRE W/O TERMINALS TO BE STRIPPED 10MM AND SOLDER DIPPED.
3. ALL WIRES TO BE CLAMPED WITHIN 200MM OF ATS.
2. GROUND WIRES ARE NOT SHOWN FOR CLARITY.
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

- 12 BLACKEN OUT "WATER HEATER" WITHOUT 53D
- 11 LOOSEN LEFT BUSS BAR MOUNTING SCREW, INSERT BRACKET-BREAKER HOLD DOWN UNDER SCREW, ORIENTATE BRACKET TOWARD MAIN BREAKER AS SHOWN AND TIGHTEN SCREW.

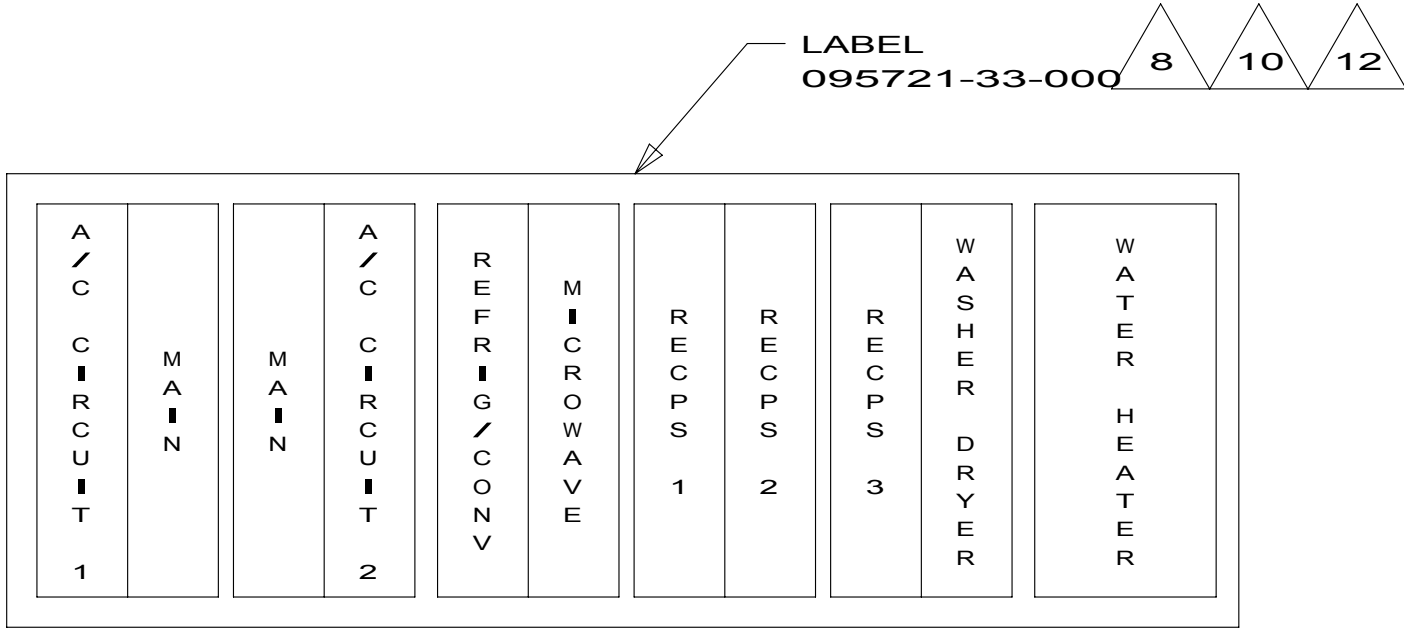

INSTALL LABEL ON FRONT COVER PLATE BELOW THE BREAKERS



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 53D WTR HTR-6GAL/ELE/LP/MOTORAID
- 29R AC HEAT PUMP-2 HI EFFICIENCY
- 276 A/C ROOF-HI EFF (2) W/EMS
- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 E-SERIES		
DO NOT SCALE DRAWING		
TITLE: LOAD CENTER/ATS ASM		
SHEET 3	PART NO 171128	REV

E32K

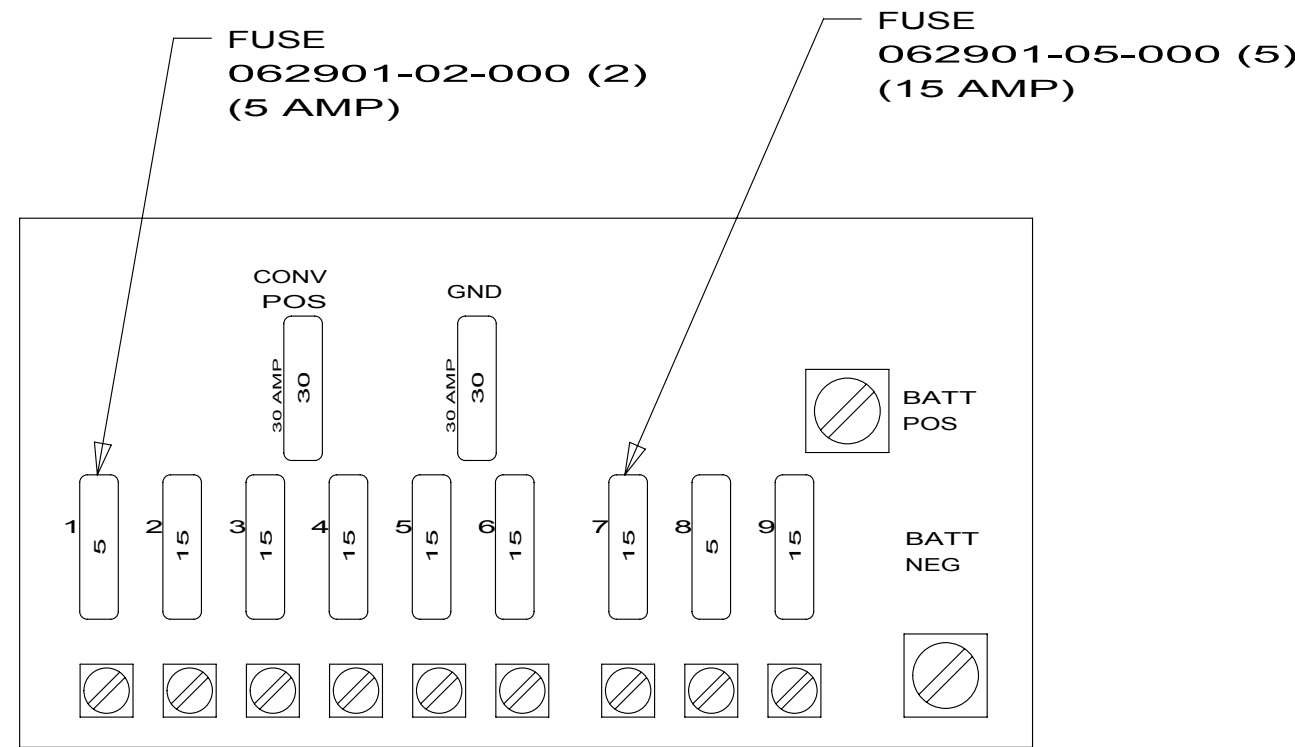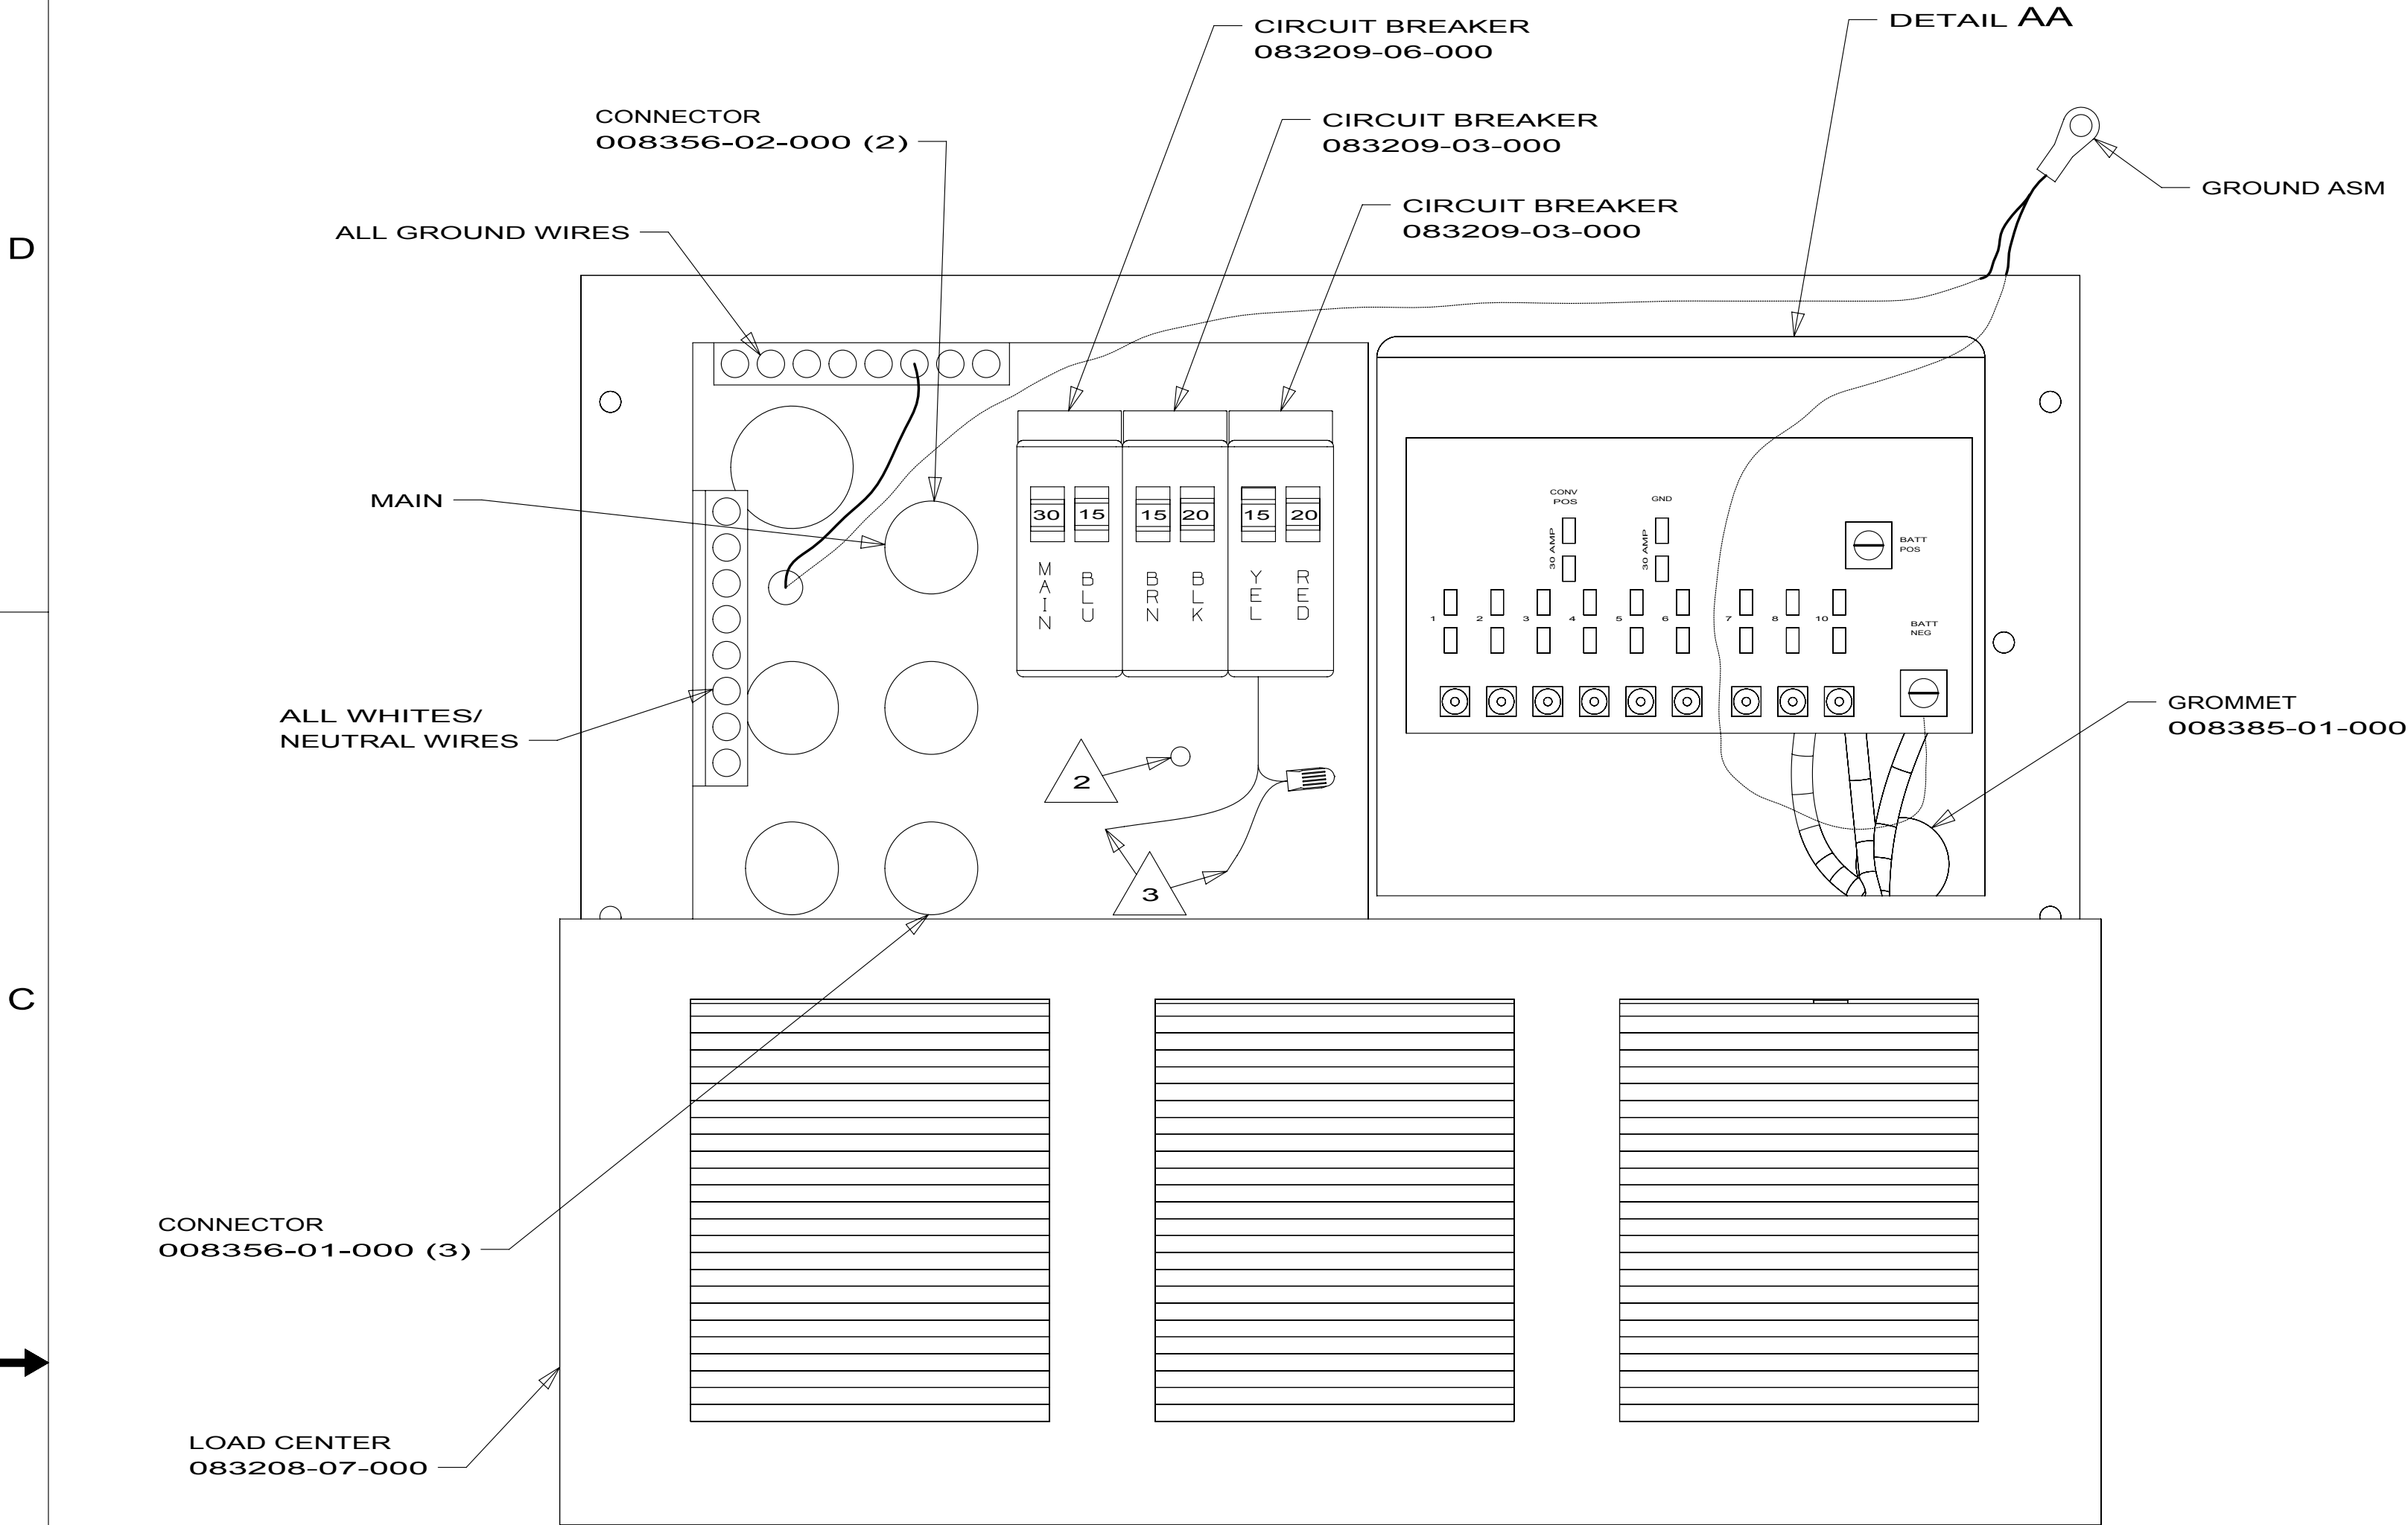

DETAIL AA

- 3 CONNECT CONVERTER POWER CIRCUIT INTO YELLOW BREAKER AND USE SUPPLIED NUT TO CONNECT YELLOW CIRCUIT.
- 2 SECURE WIRES TO BACKSIDE OF LOAD CENTER WITH WIRE TIE 116673-01-000.
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 008041-02-000.

NOTES:

E26P & E30W




- 29J AC HEAT PUMP-1
- 25Q A/C ROOF AIR (1) 14,800 BTU
- 12D ELECTRICAL SYSTEM 30 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 12D 25Q 29J

FIRST USED		
10 E-SERIES		
DO NOT SCALE DRAWING		
TITLE: LOAD CENTER/ATS ASM		
SHEET 4	PART NO 171128	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

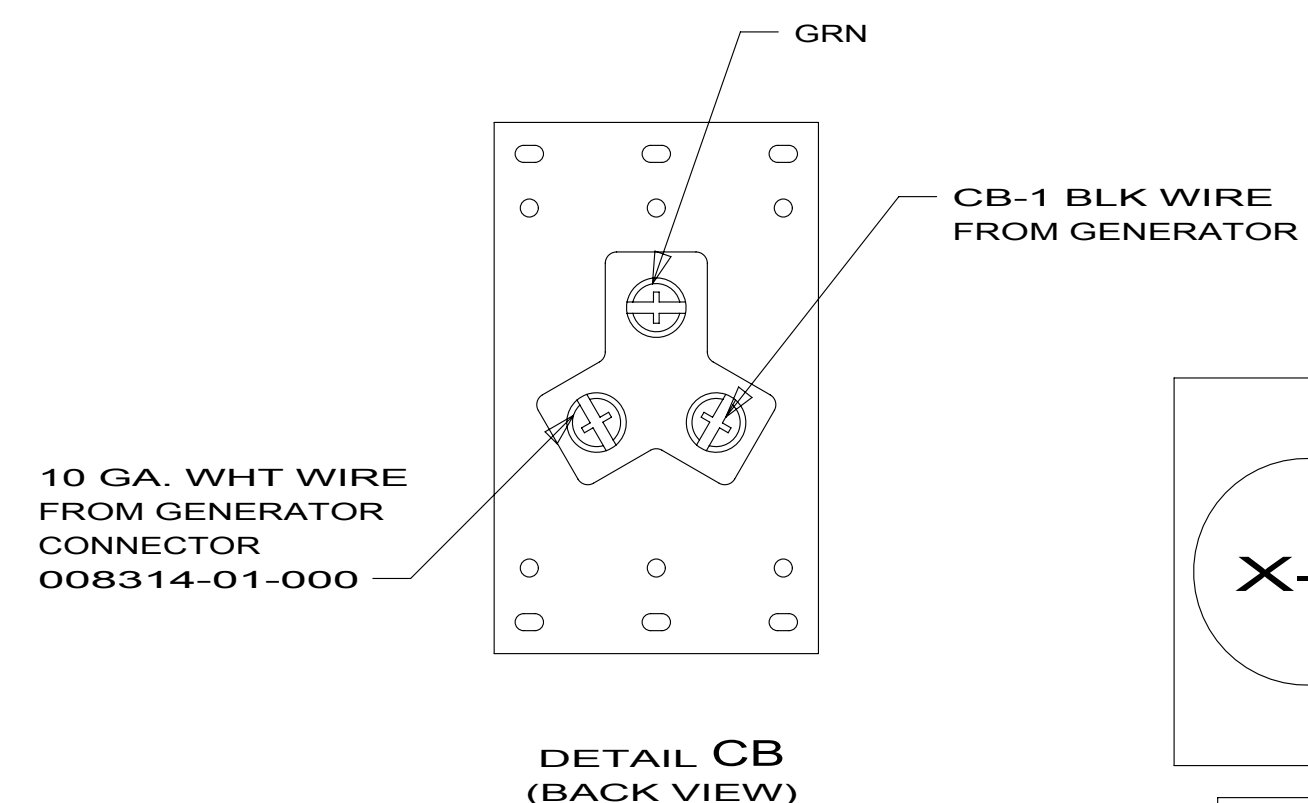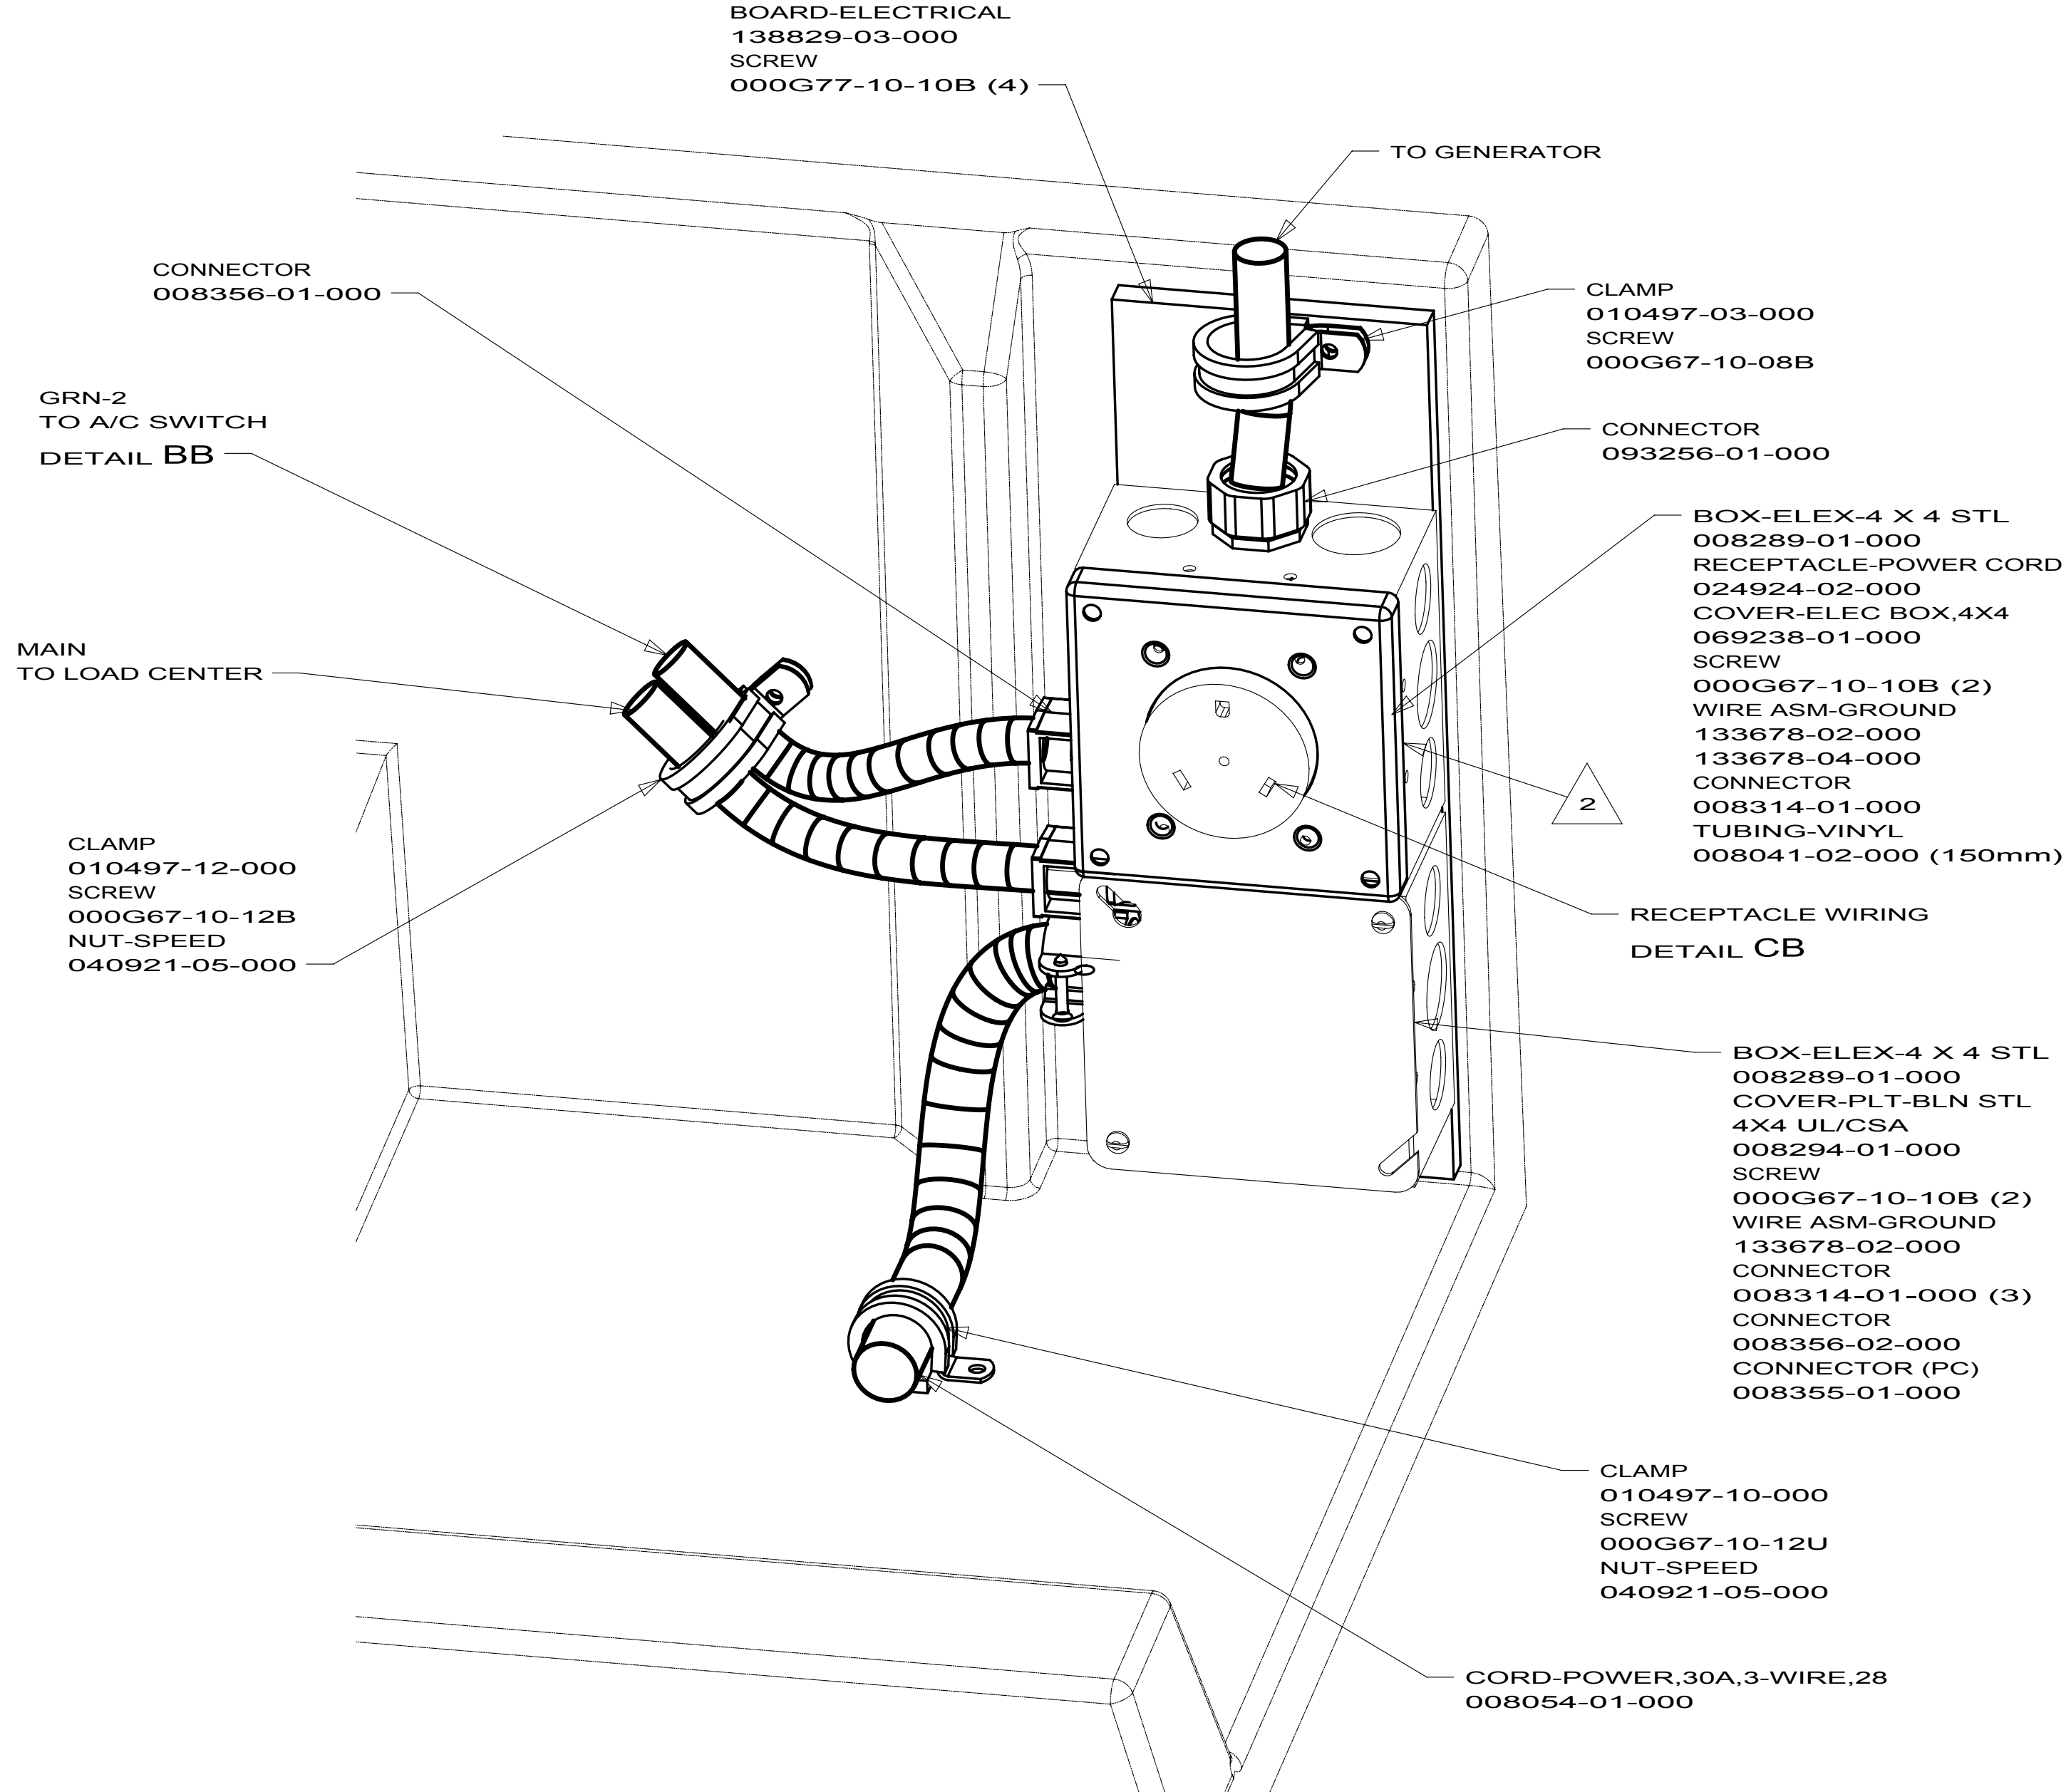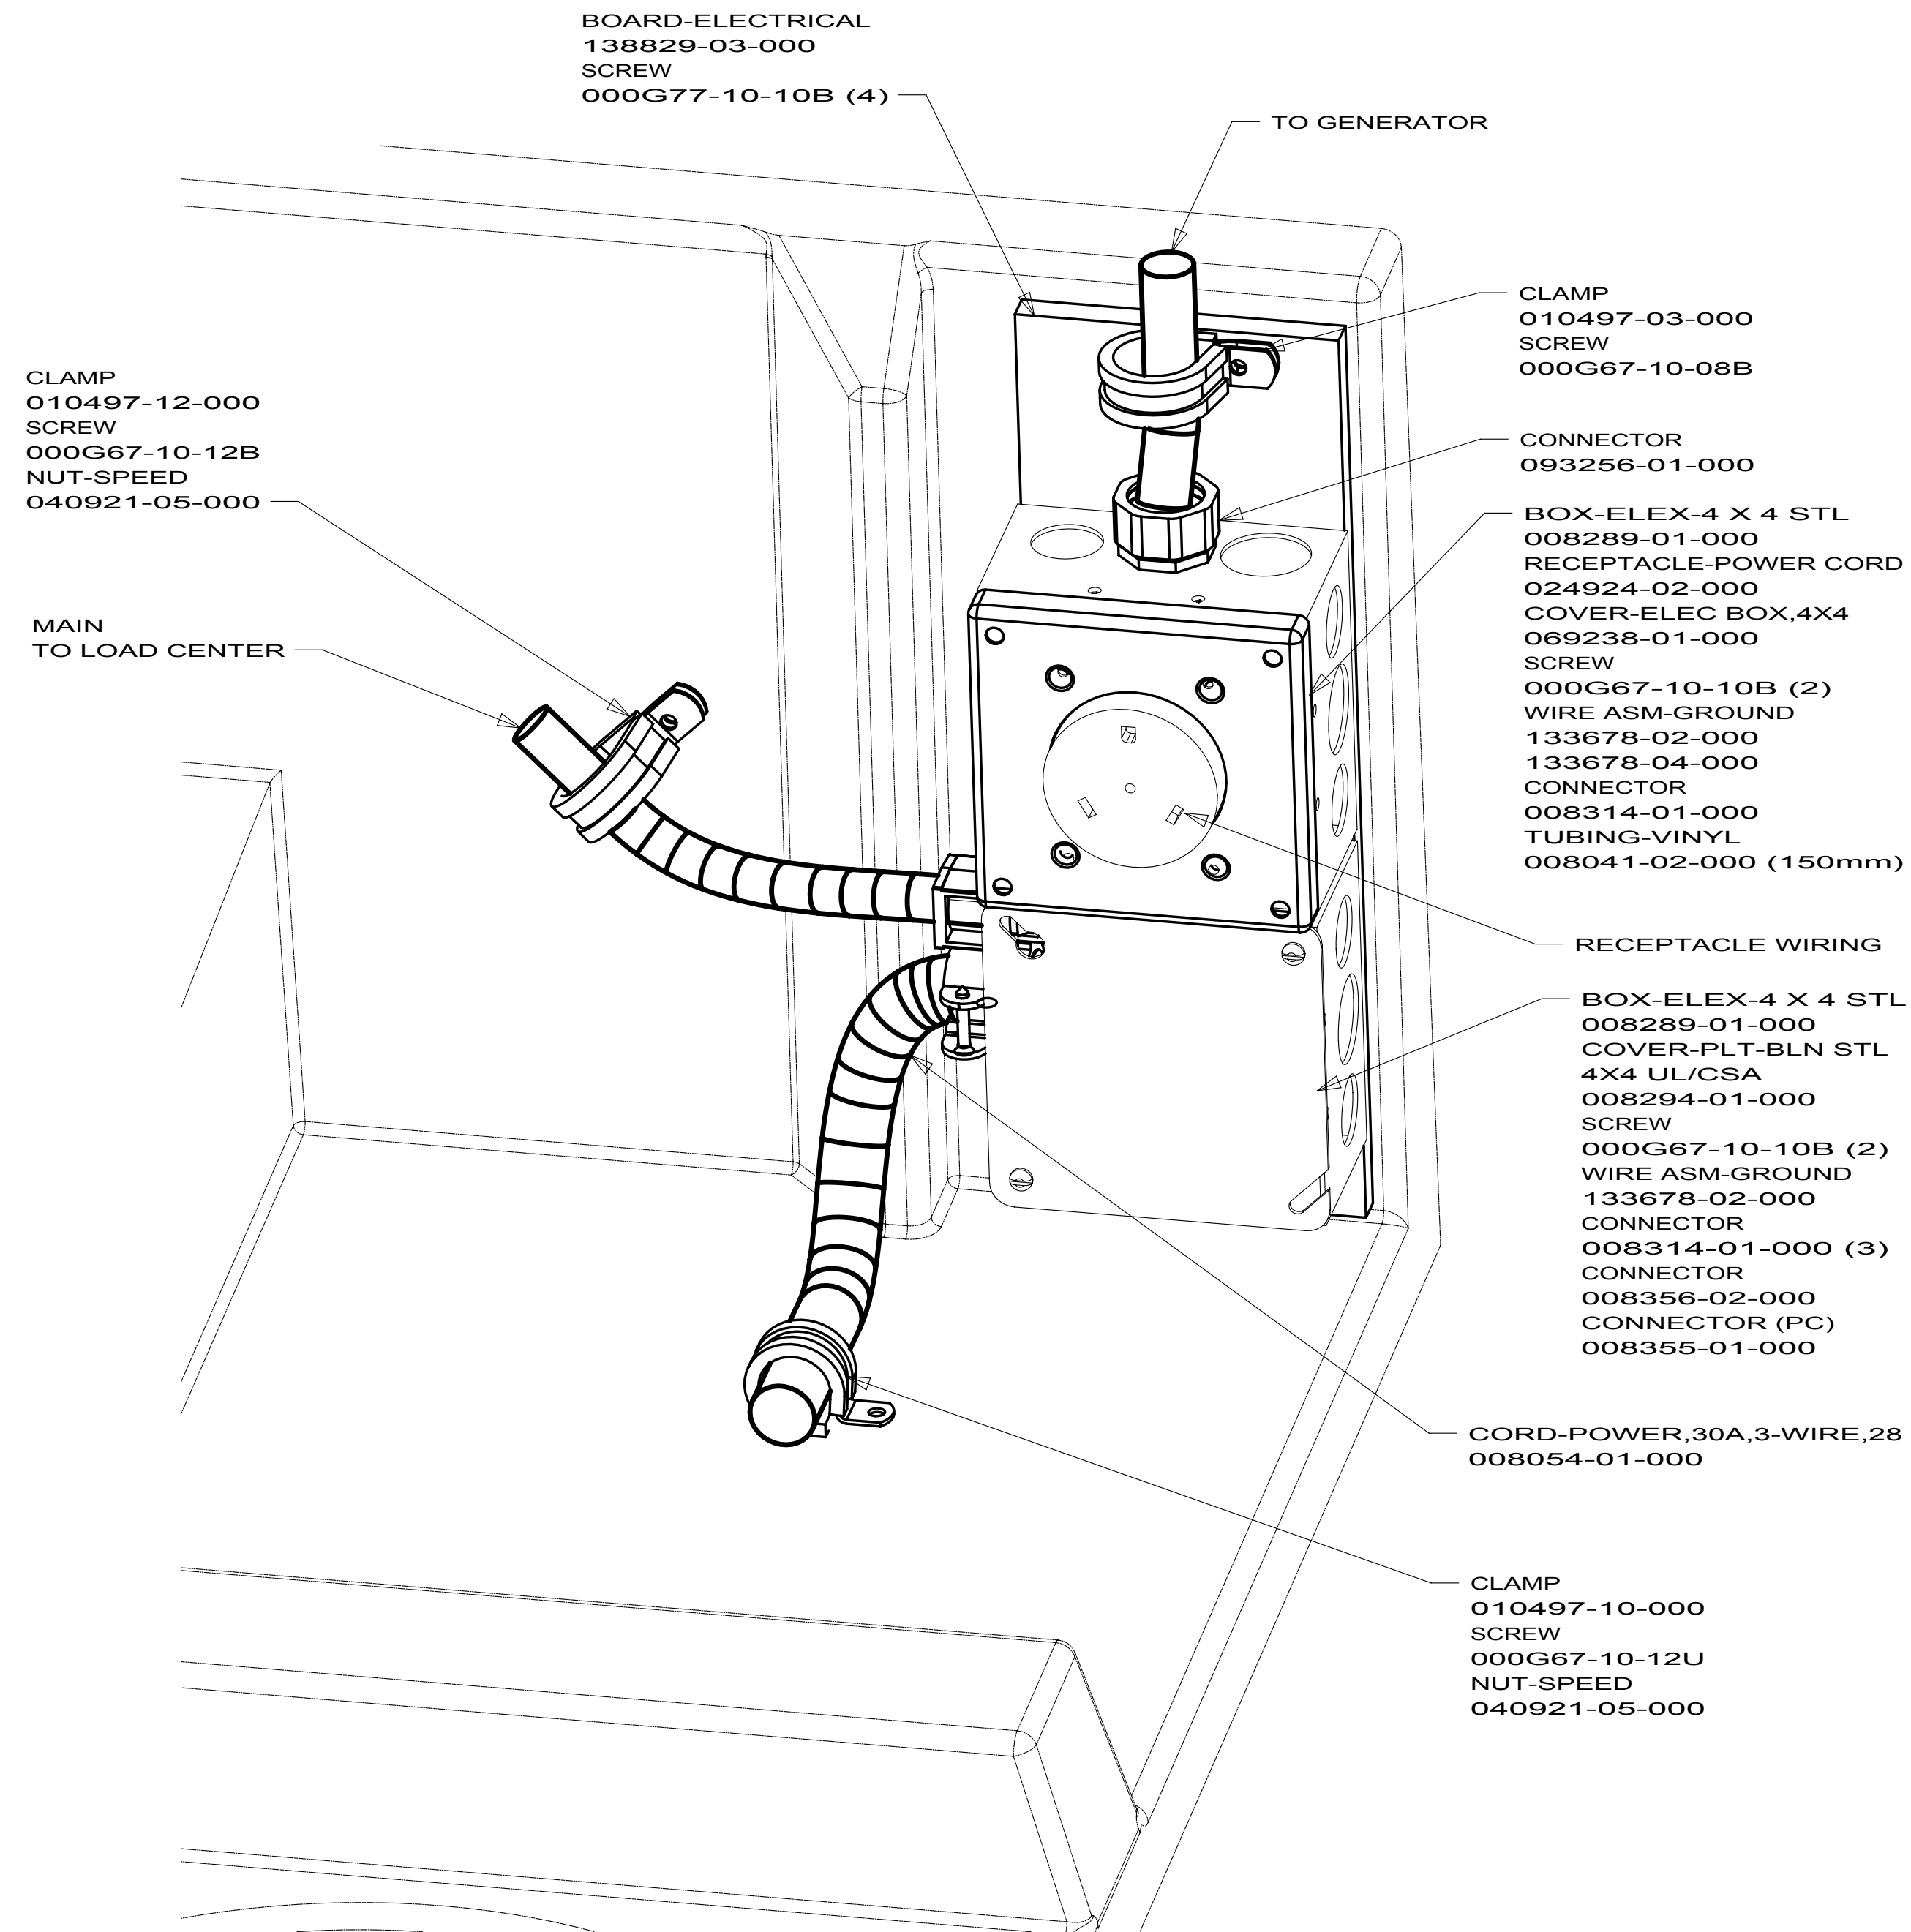



FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

2 CONNECT CB-2 BLACK WIRE FROM GENERATOR TO BLACK OF GRN-2 WITH CONNECTOR 008311-01-000 AND WHITES TO WHITES AND GROUNDS TO GROUNDS.

- 29J AC HEAT PUMP-1
- 29R AC HEAT PUMP-2 HI EFFICIENCY
- 25Q A/C ROOF AIR (1) 14,800 BTU
- 276 A/C ROOF-HI EFF (2) W/EMS
- 12D ELECTRICAL SYSTEM 30 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 E-SERIES		
DO NOT SCALE DRAWING		
TITLE: LOAD CENTER/ATS ASM		
SHEET 5	PART NO 171128	REV

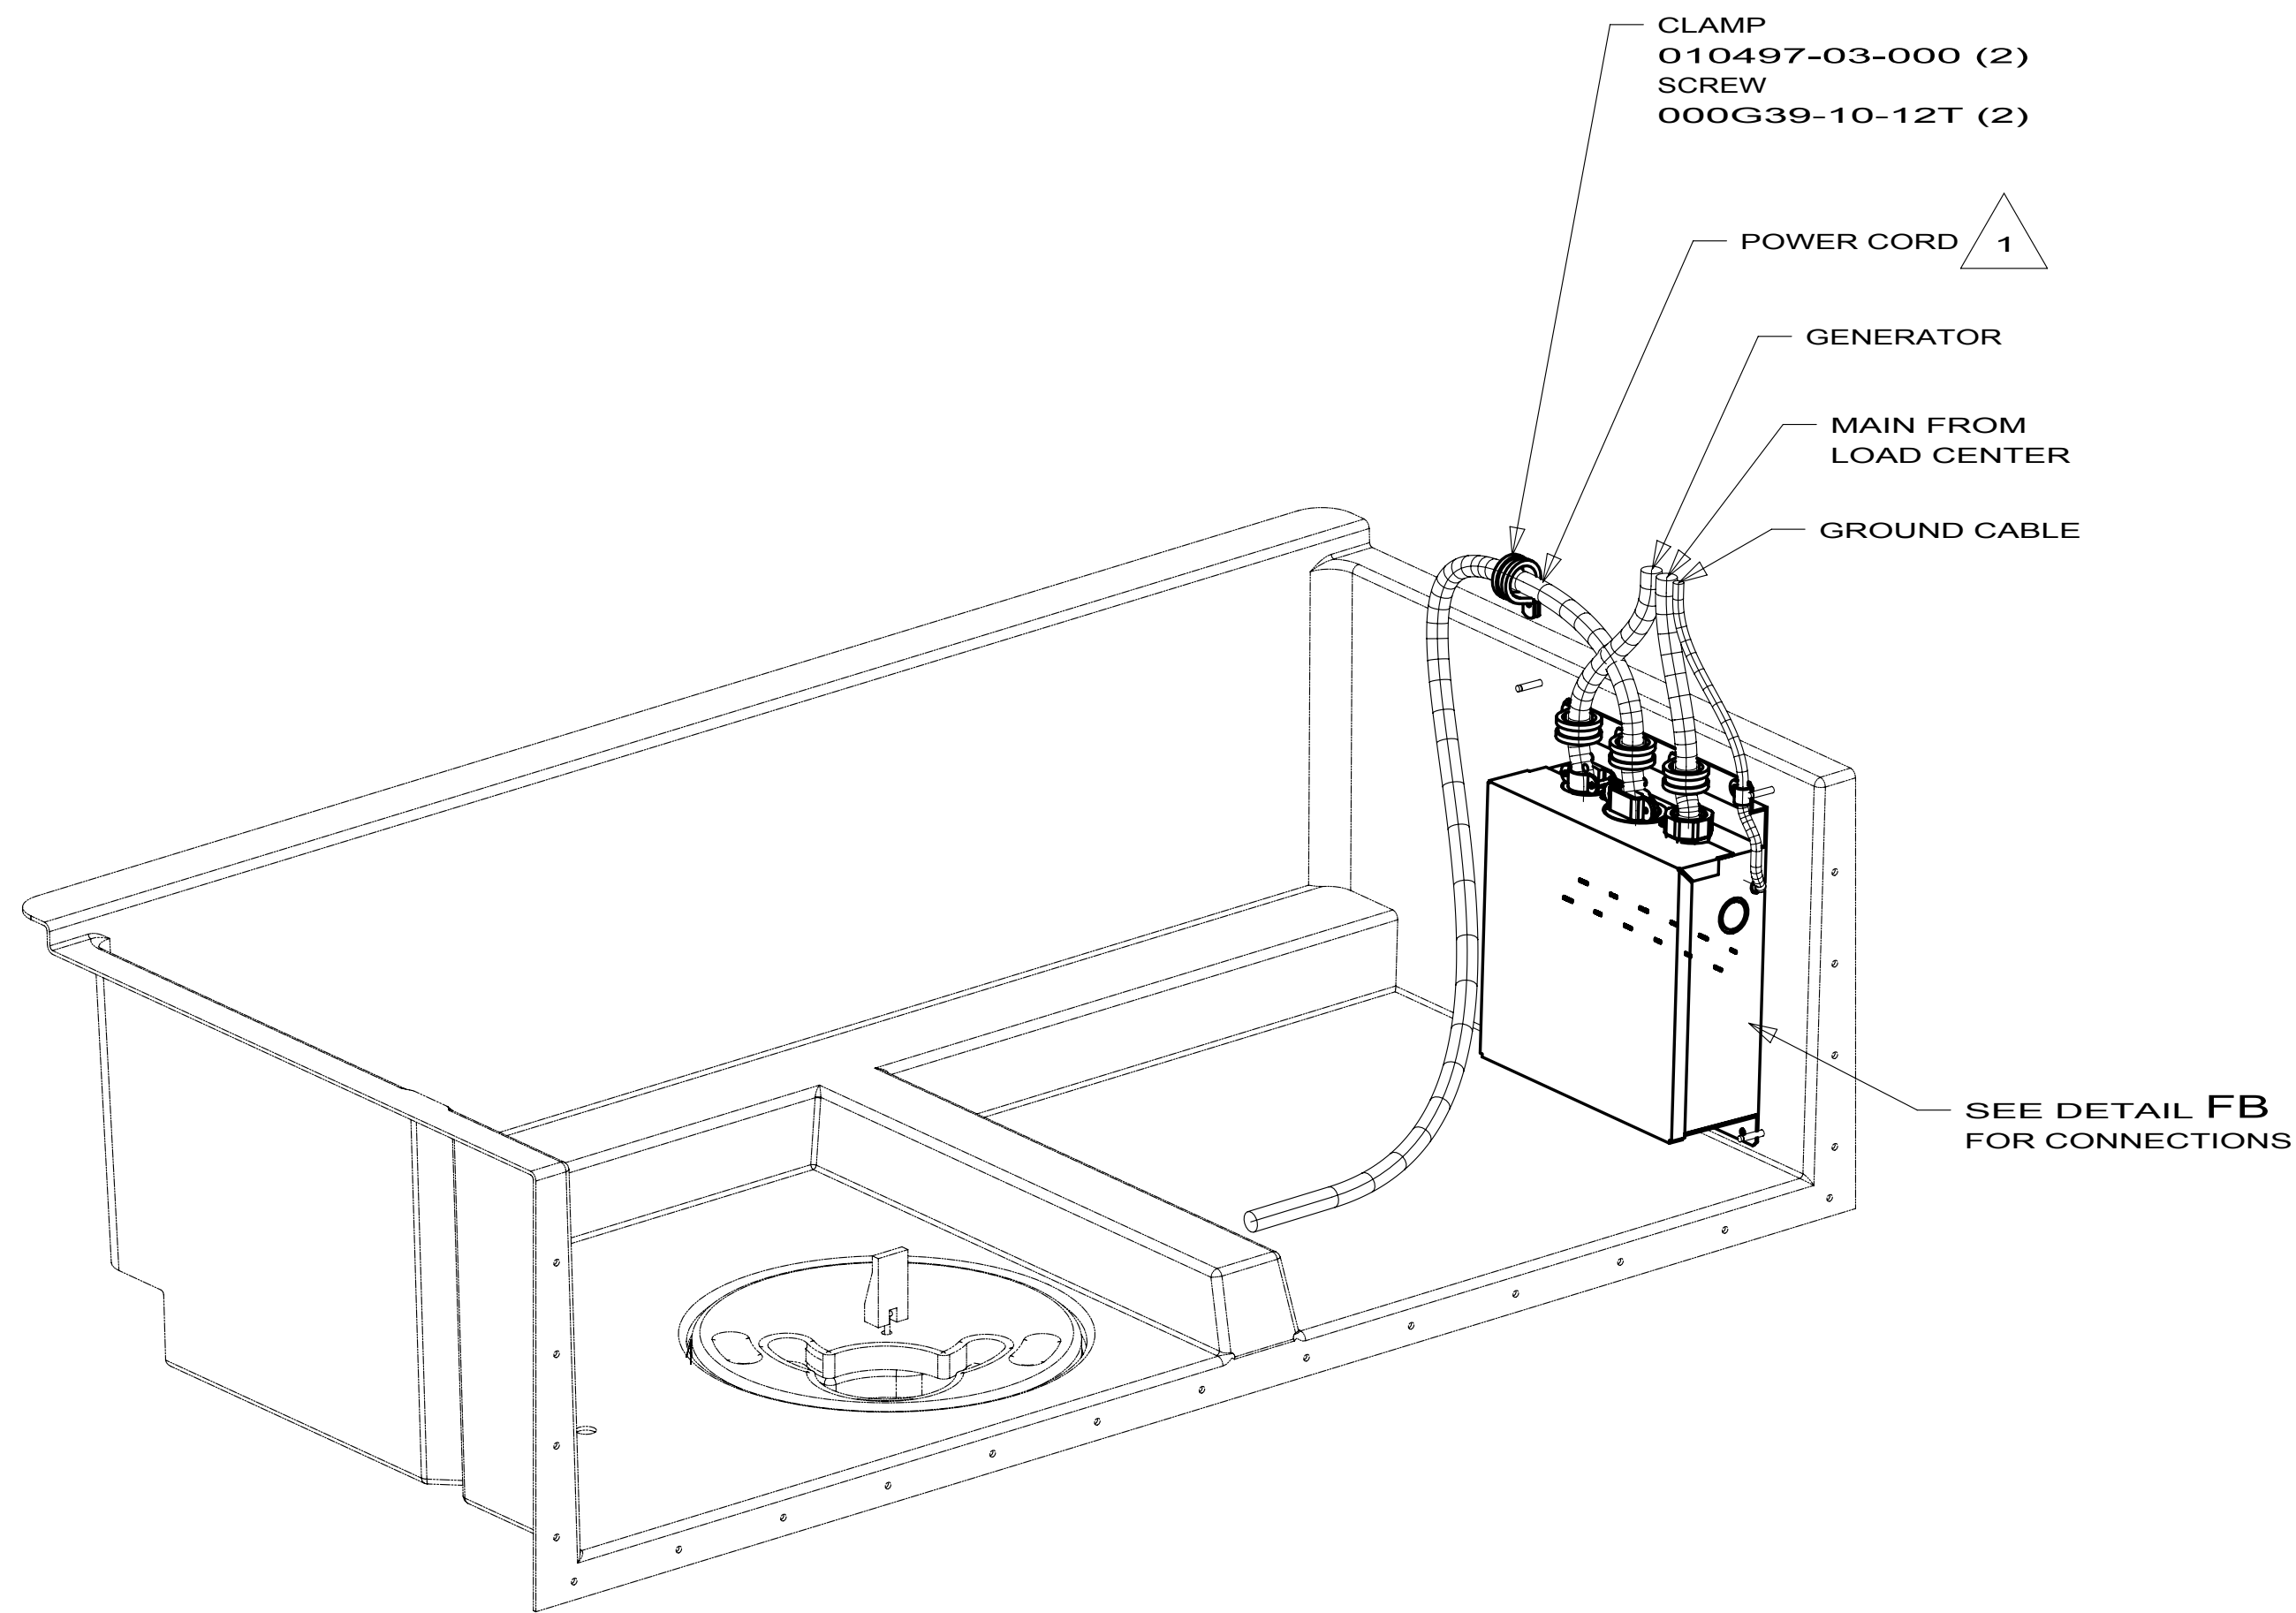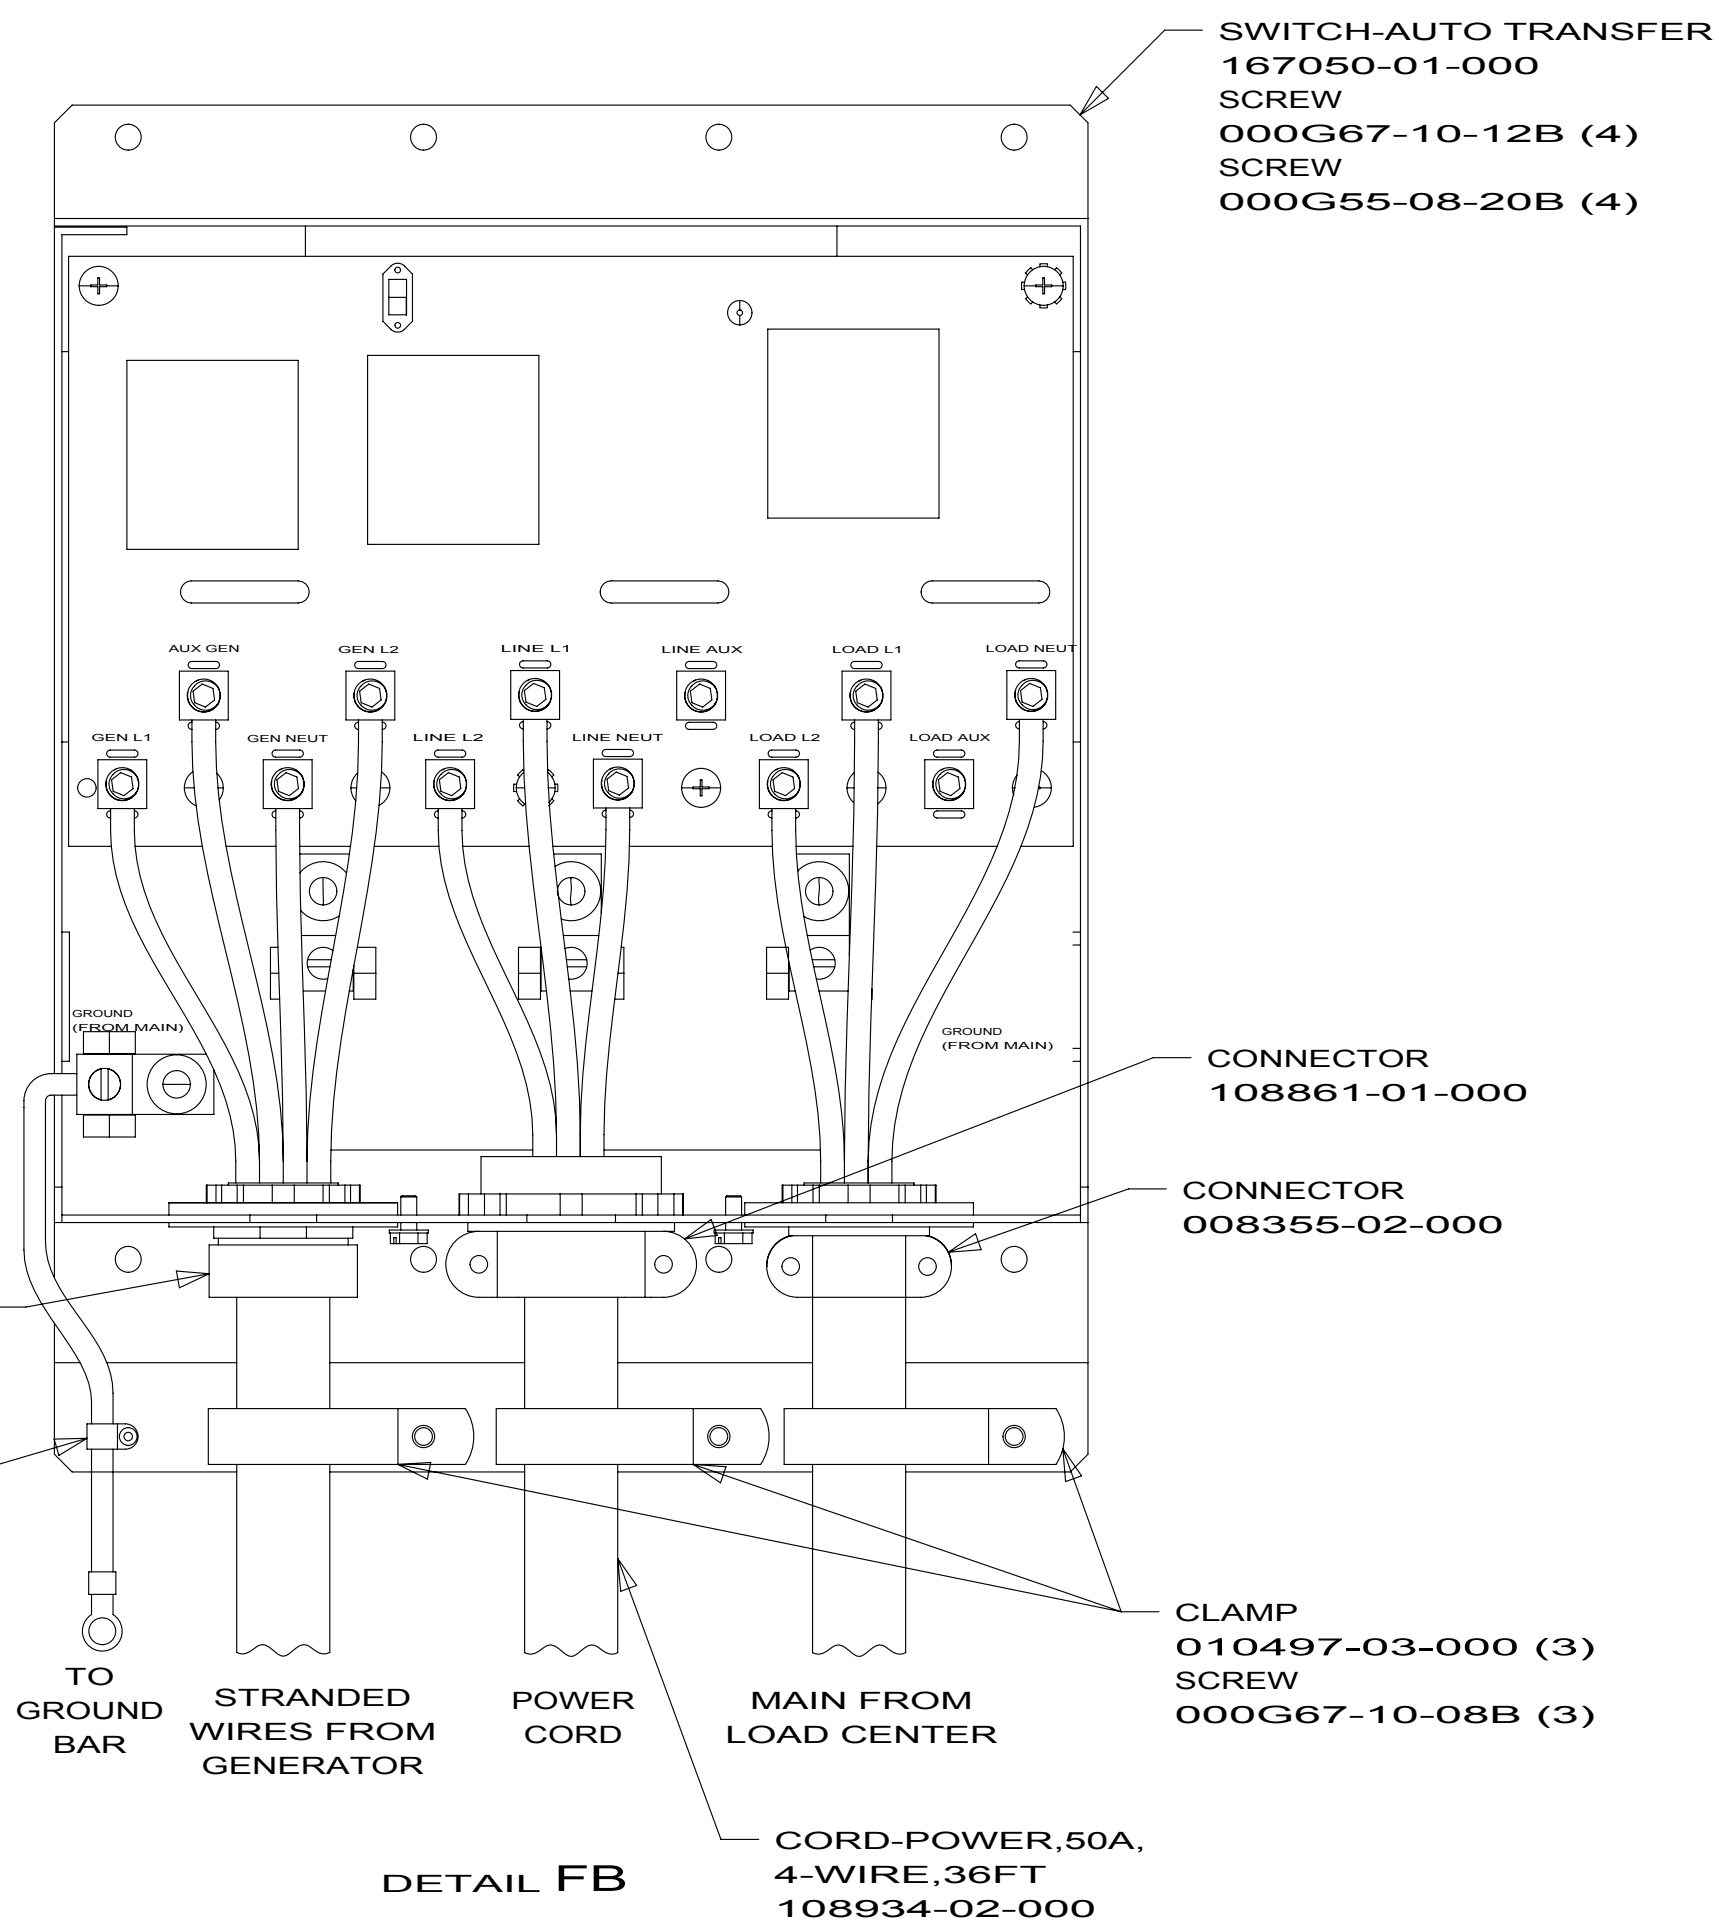

1 ROUTE POWER CORD BEHIND WATER CENTER PANEL.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 276 A/C ROOF-HI EFF (2) W/EMS
- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 78J 276

FIRST USED		
10 E-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
LOAD CENTER/ATS ASM		
SHEET 6	PART NO. 171128	REV

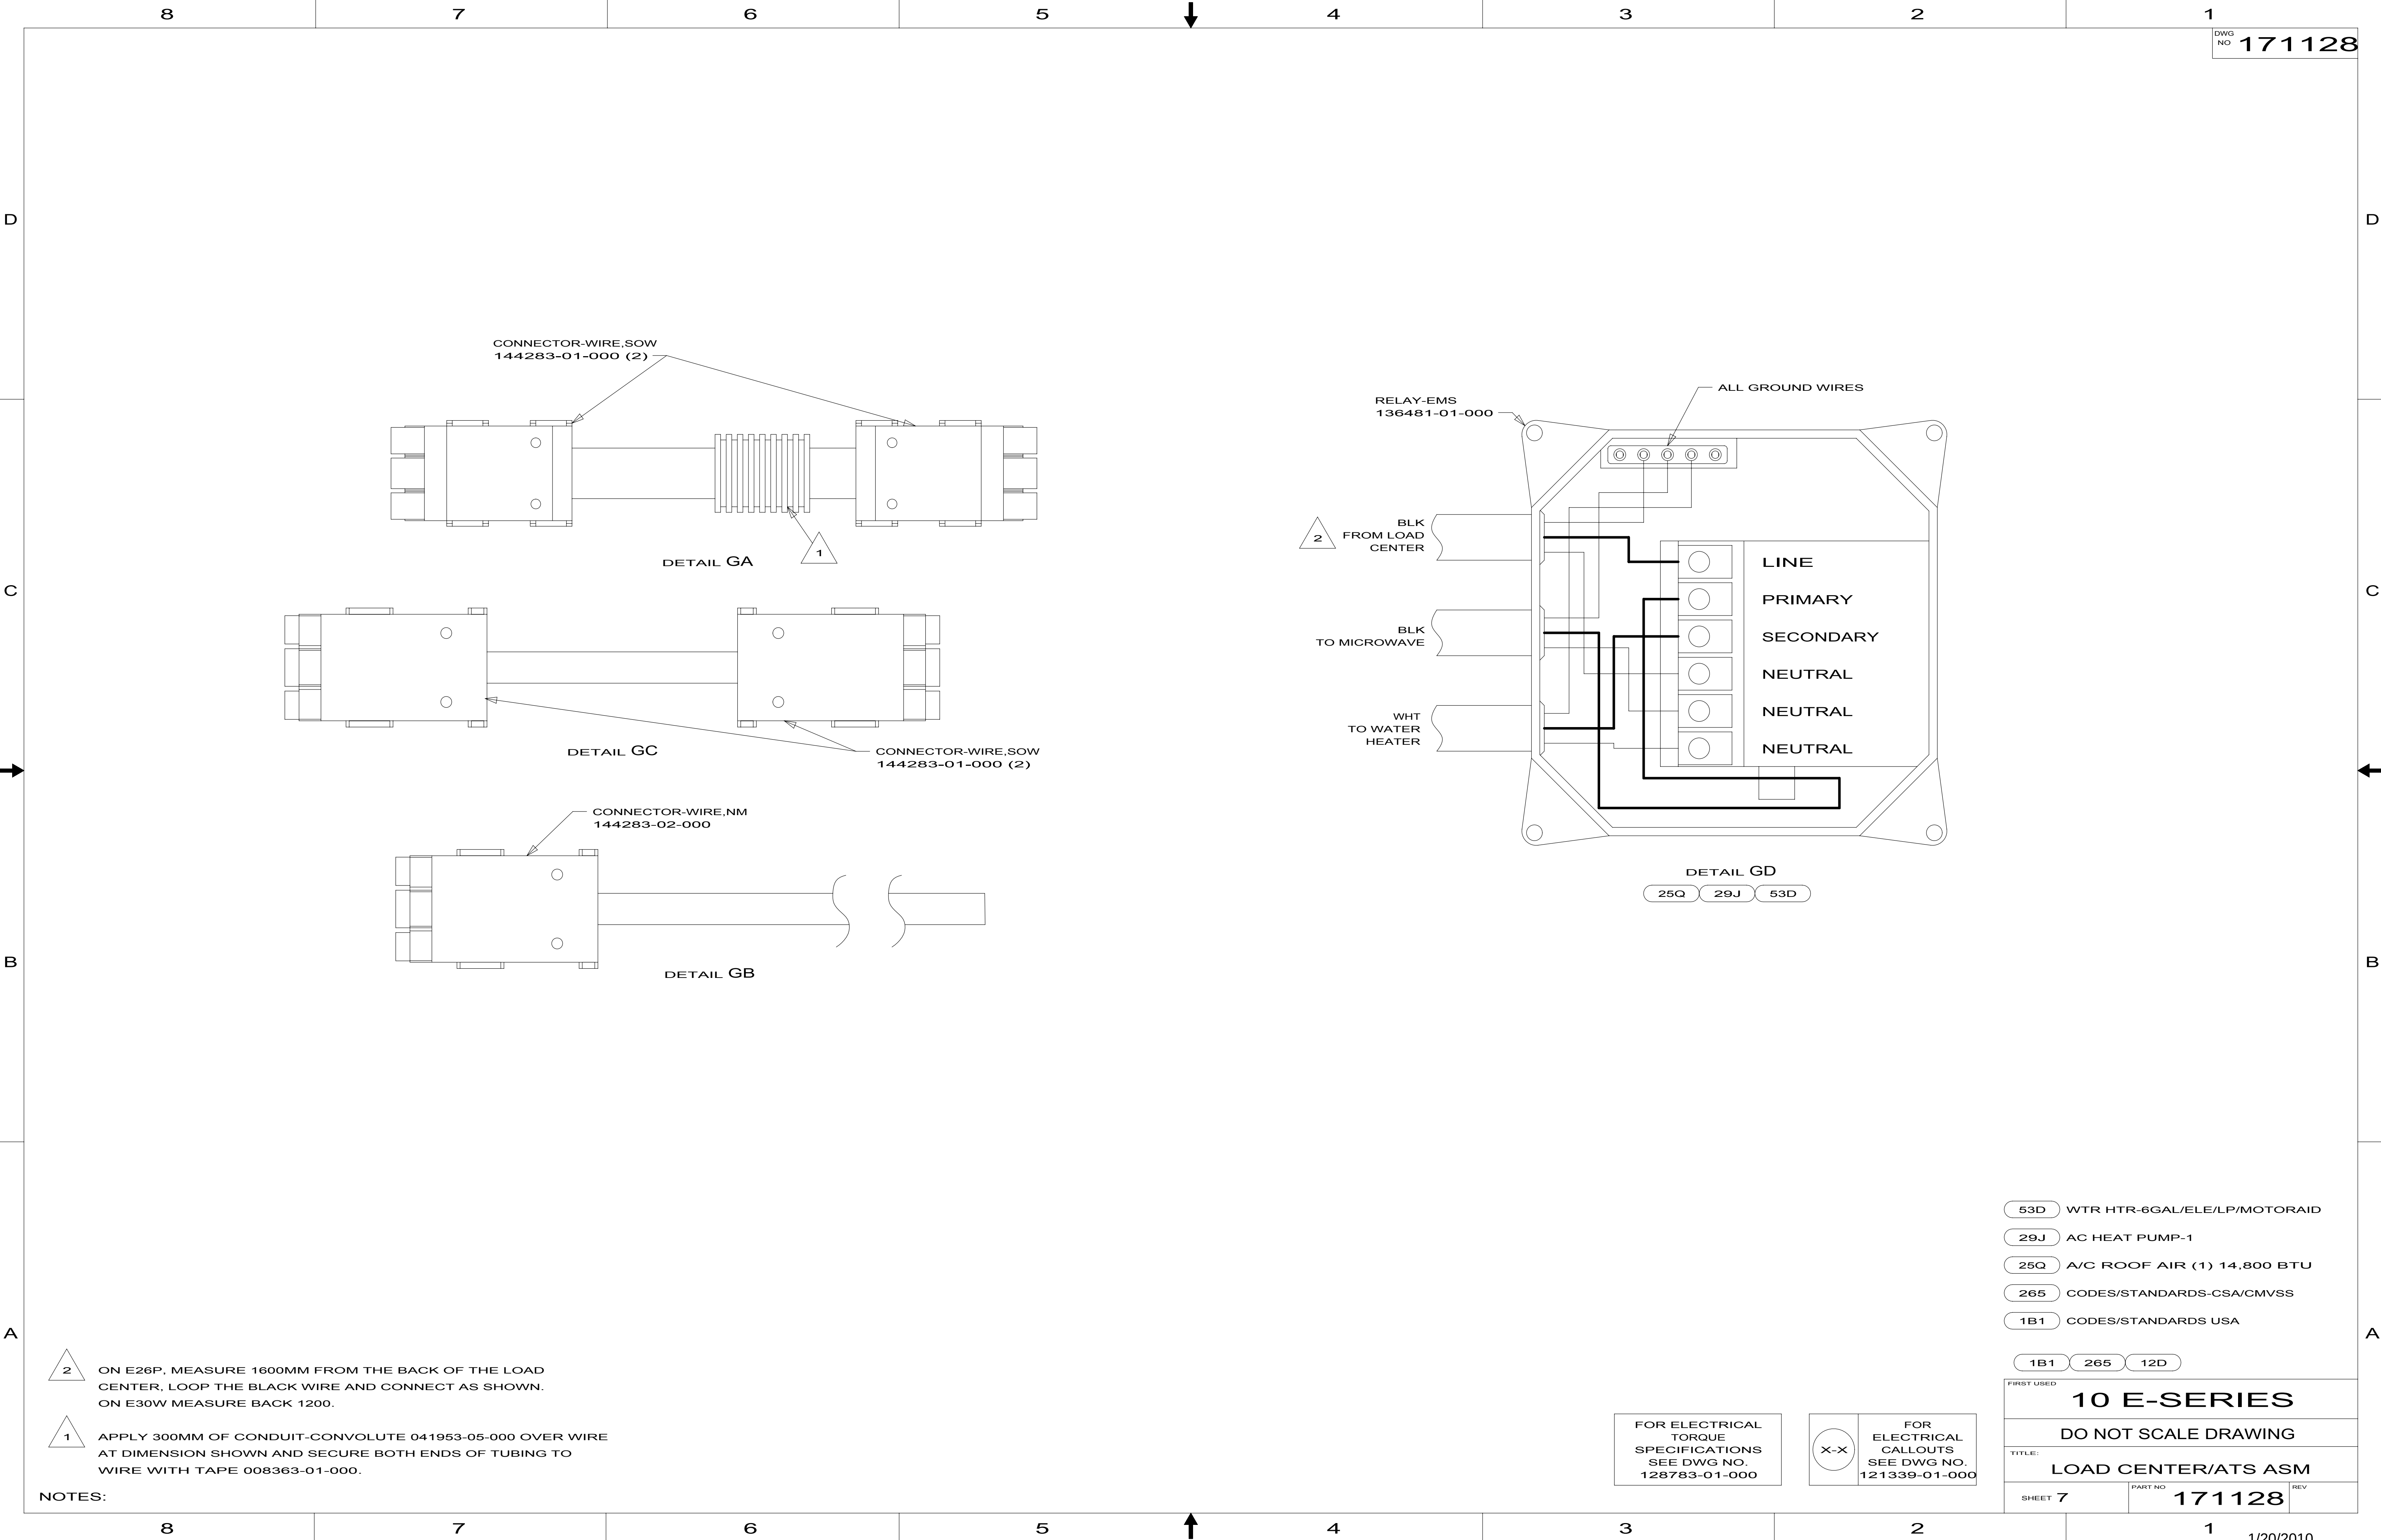

2

ON E26P, MEASURE 1600MM FROM THE BACK OF THE LOAD CENTER, LOOP THE BLACK WIRE AND CONNECT AS SHOWN. ON E30W MEASURE BACK 1200.

1

APPLY 300MM OF CONDUIT-CONVOLUTE 041953-05-000 OVER WIRE AT DIMENSION SHOWN AND SECURE BOTH ENDS OF TUBING TO WIRE WITH TAPE 008363-01-000.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 53D WTR HTR-6GAL/ELE/LP/MOTORAID
- 29J AC HEAT PUMP-1
- 25Q A/C ROOF AIR (1) 14,800 BTU
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 E-SERIES		
DO NOT SCALE DRAWING		
TITLE: LOAD CENTER/ATS ASM		
SHEET 7	PART NO 171128	REV

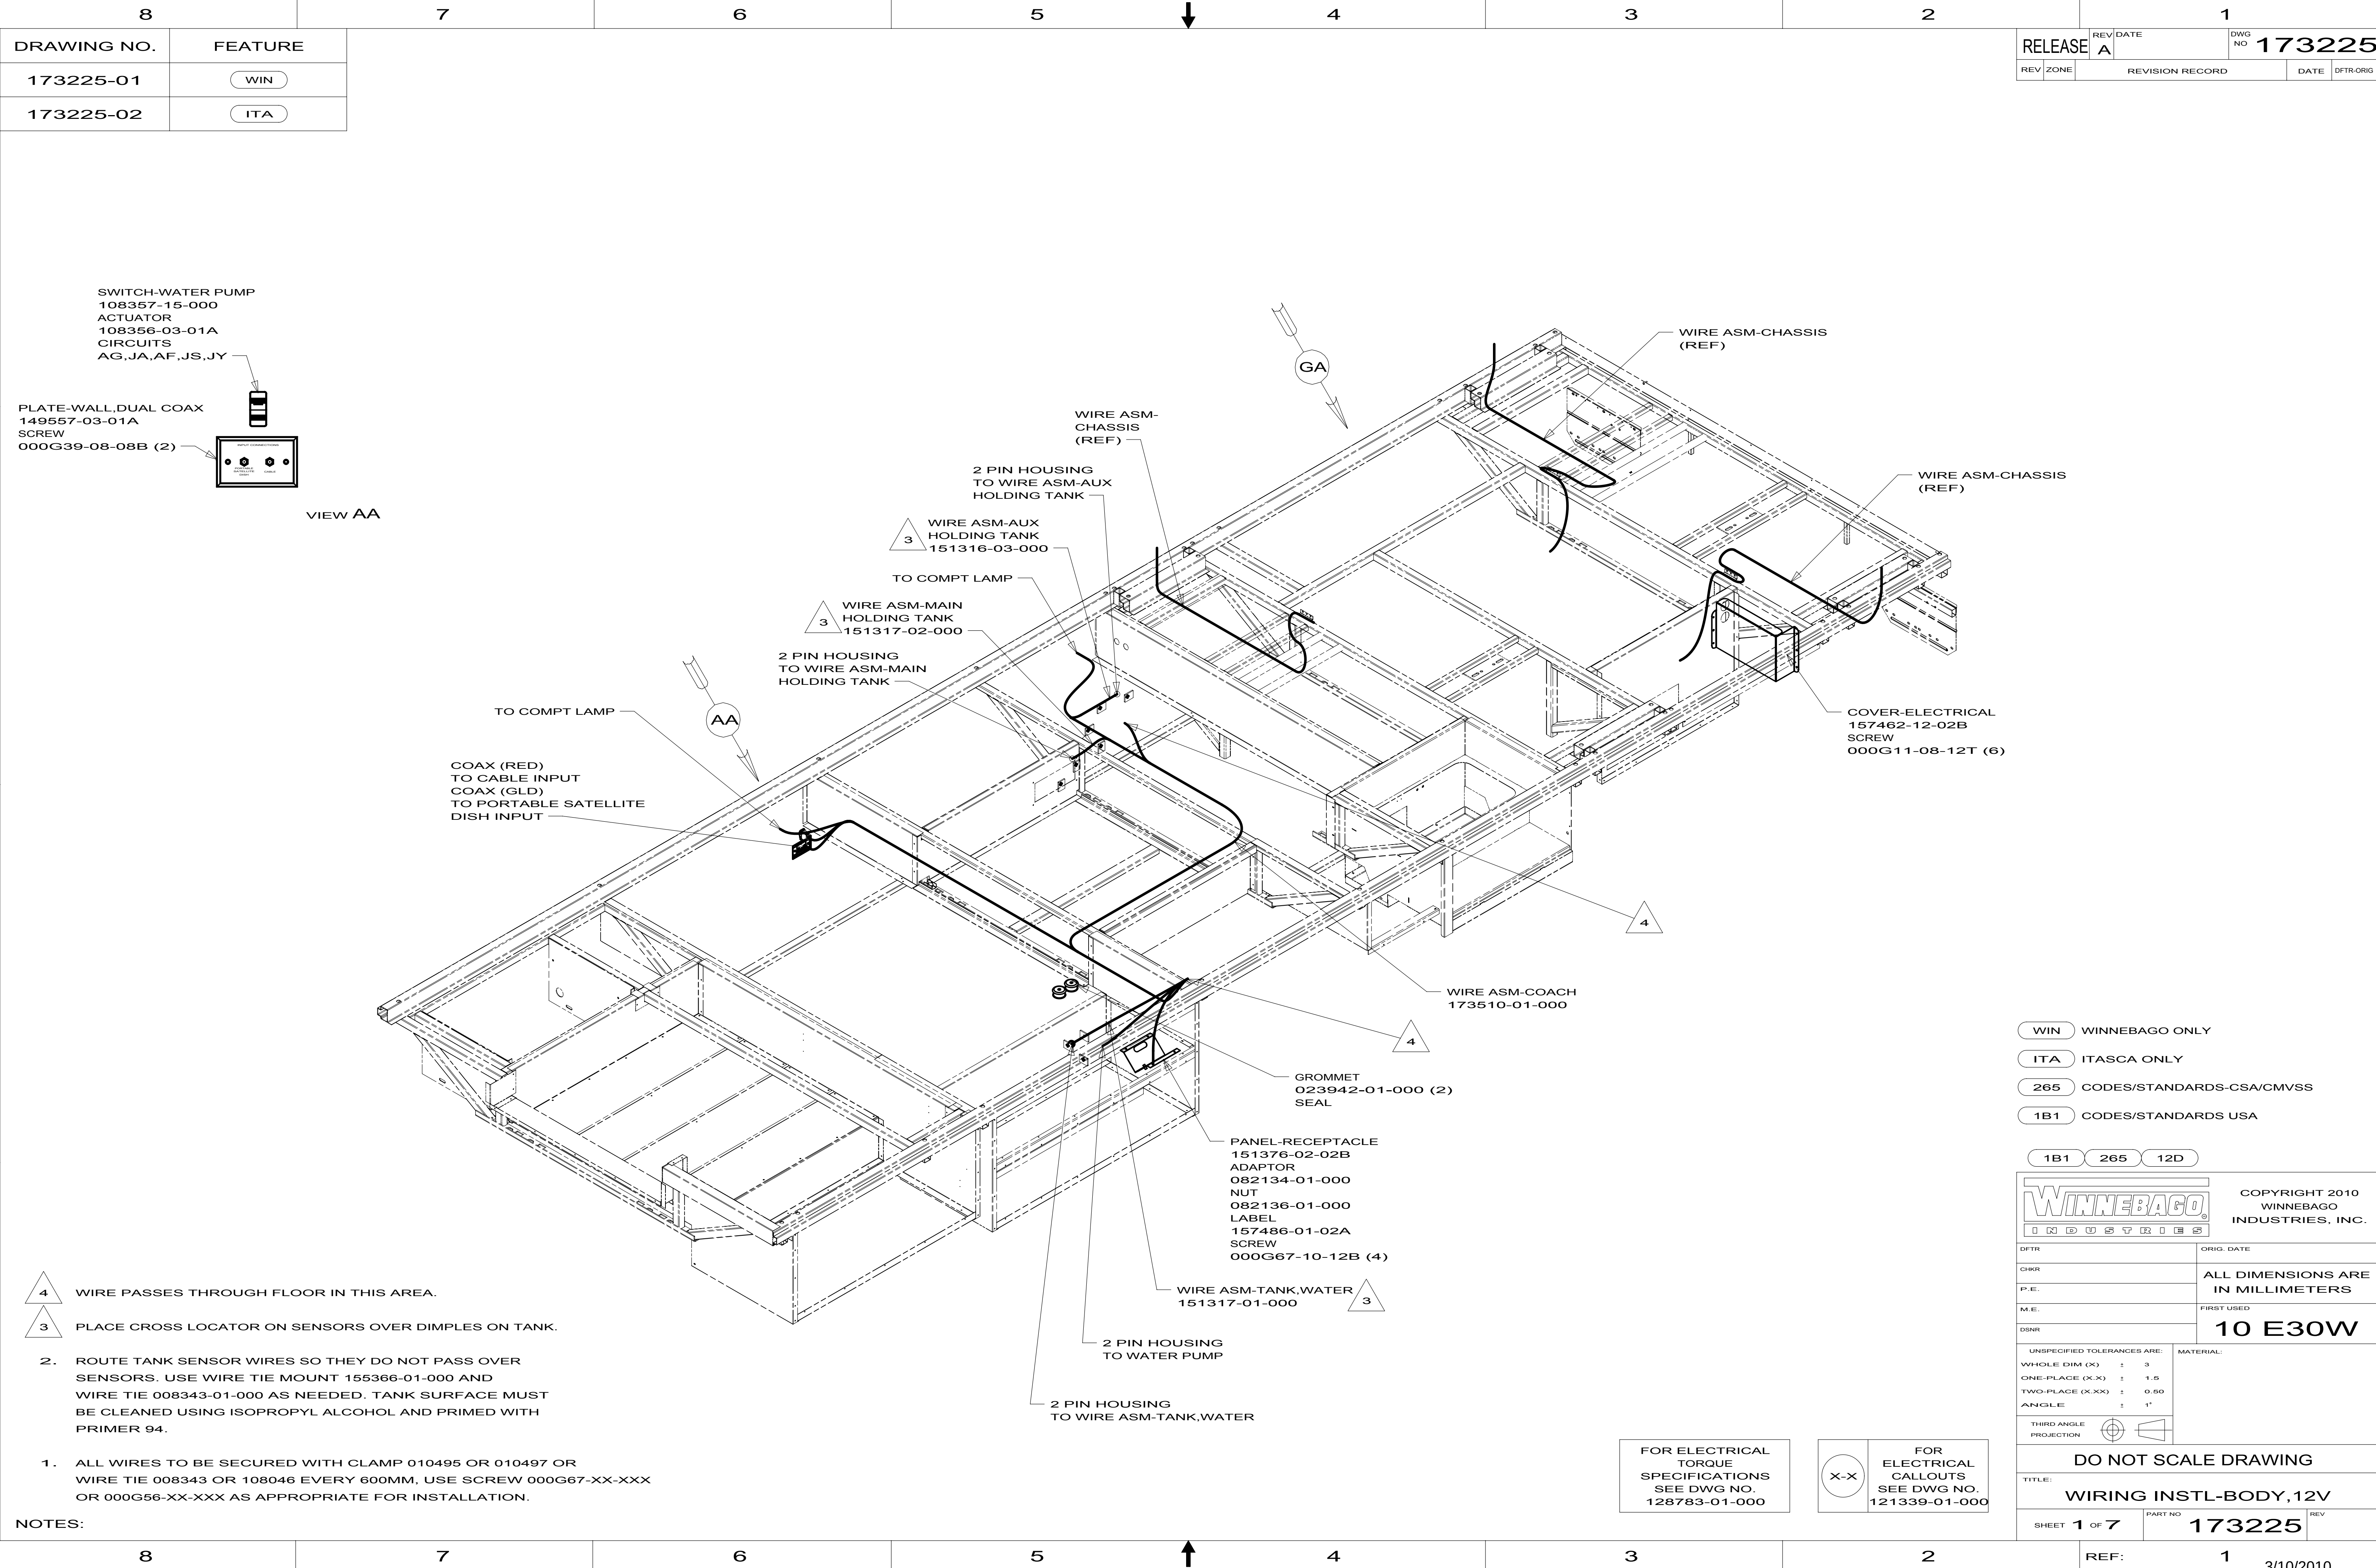

DRAWING NO.	FEATURE
173225-01	WIN
173225-02	ITA

RELEASE	REV A	DATE	DWG NO 173225
REV	ZONE	REVISION RECORD	DATE DFT-ORIG

- NOTES:
- ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
 - ROUTE TANK SENSOR WIRES SO THEY DO NOT PASS OVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 008343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

WIN WINNEBAGO ONLY

ITA ITASCA ONLY

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA

1B126512D

COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHK-OR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	
DSNR	
FIRST USED	
10 E30W	
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY,12V	
SHEET 1 OF 7	PART NO 173225
REF: 1	

3/10/2010

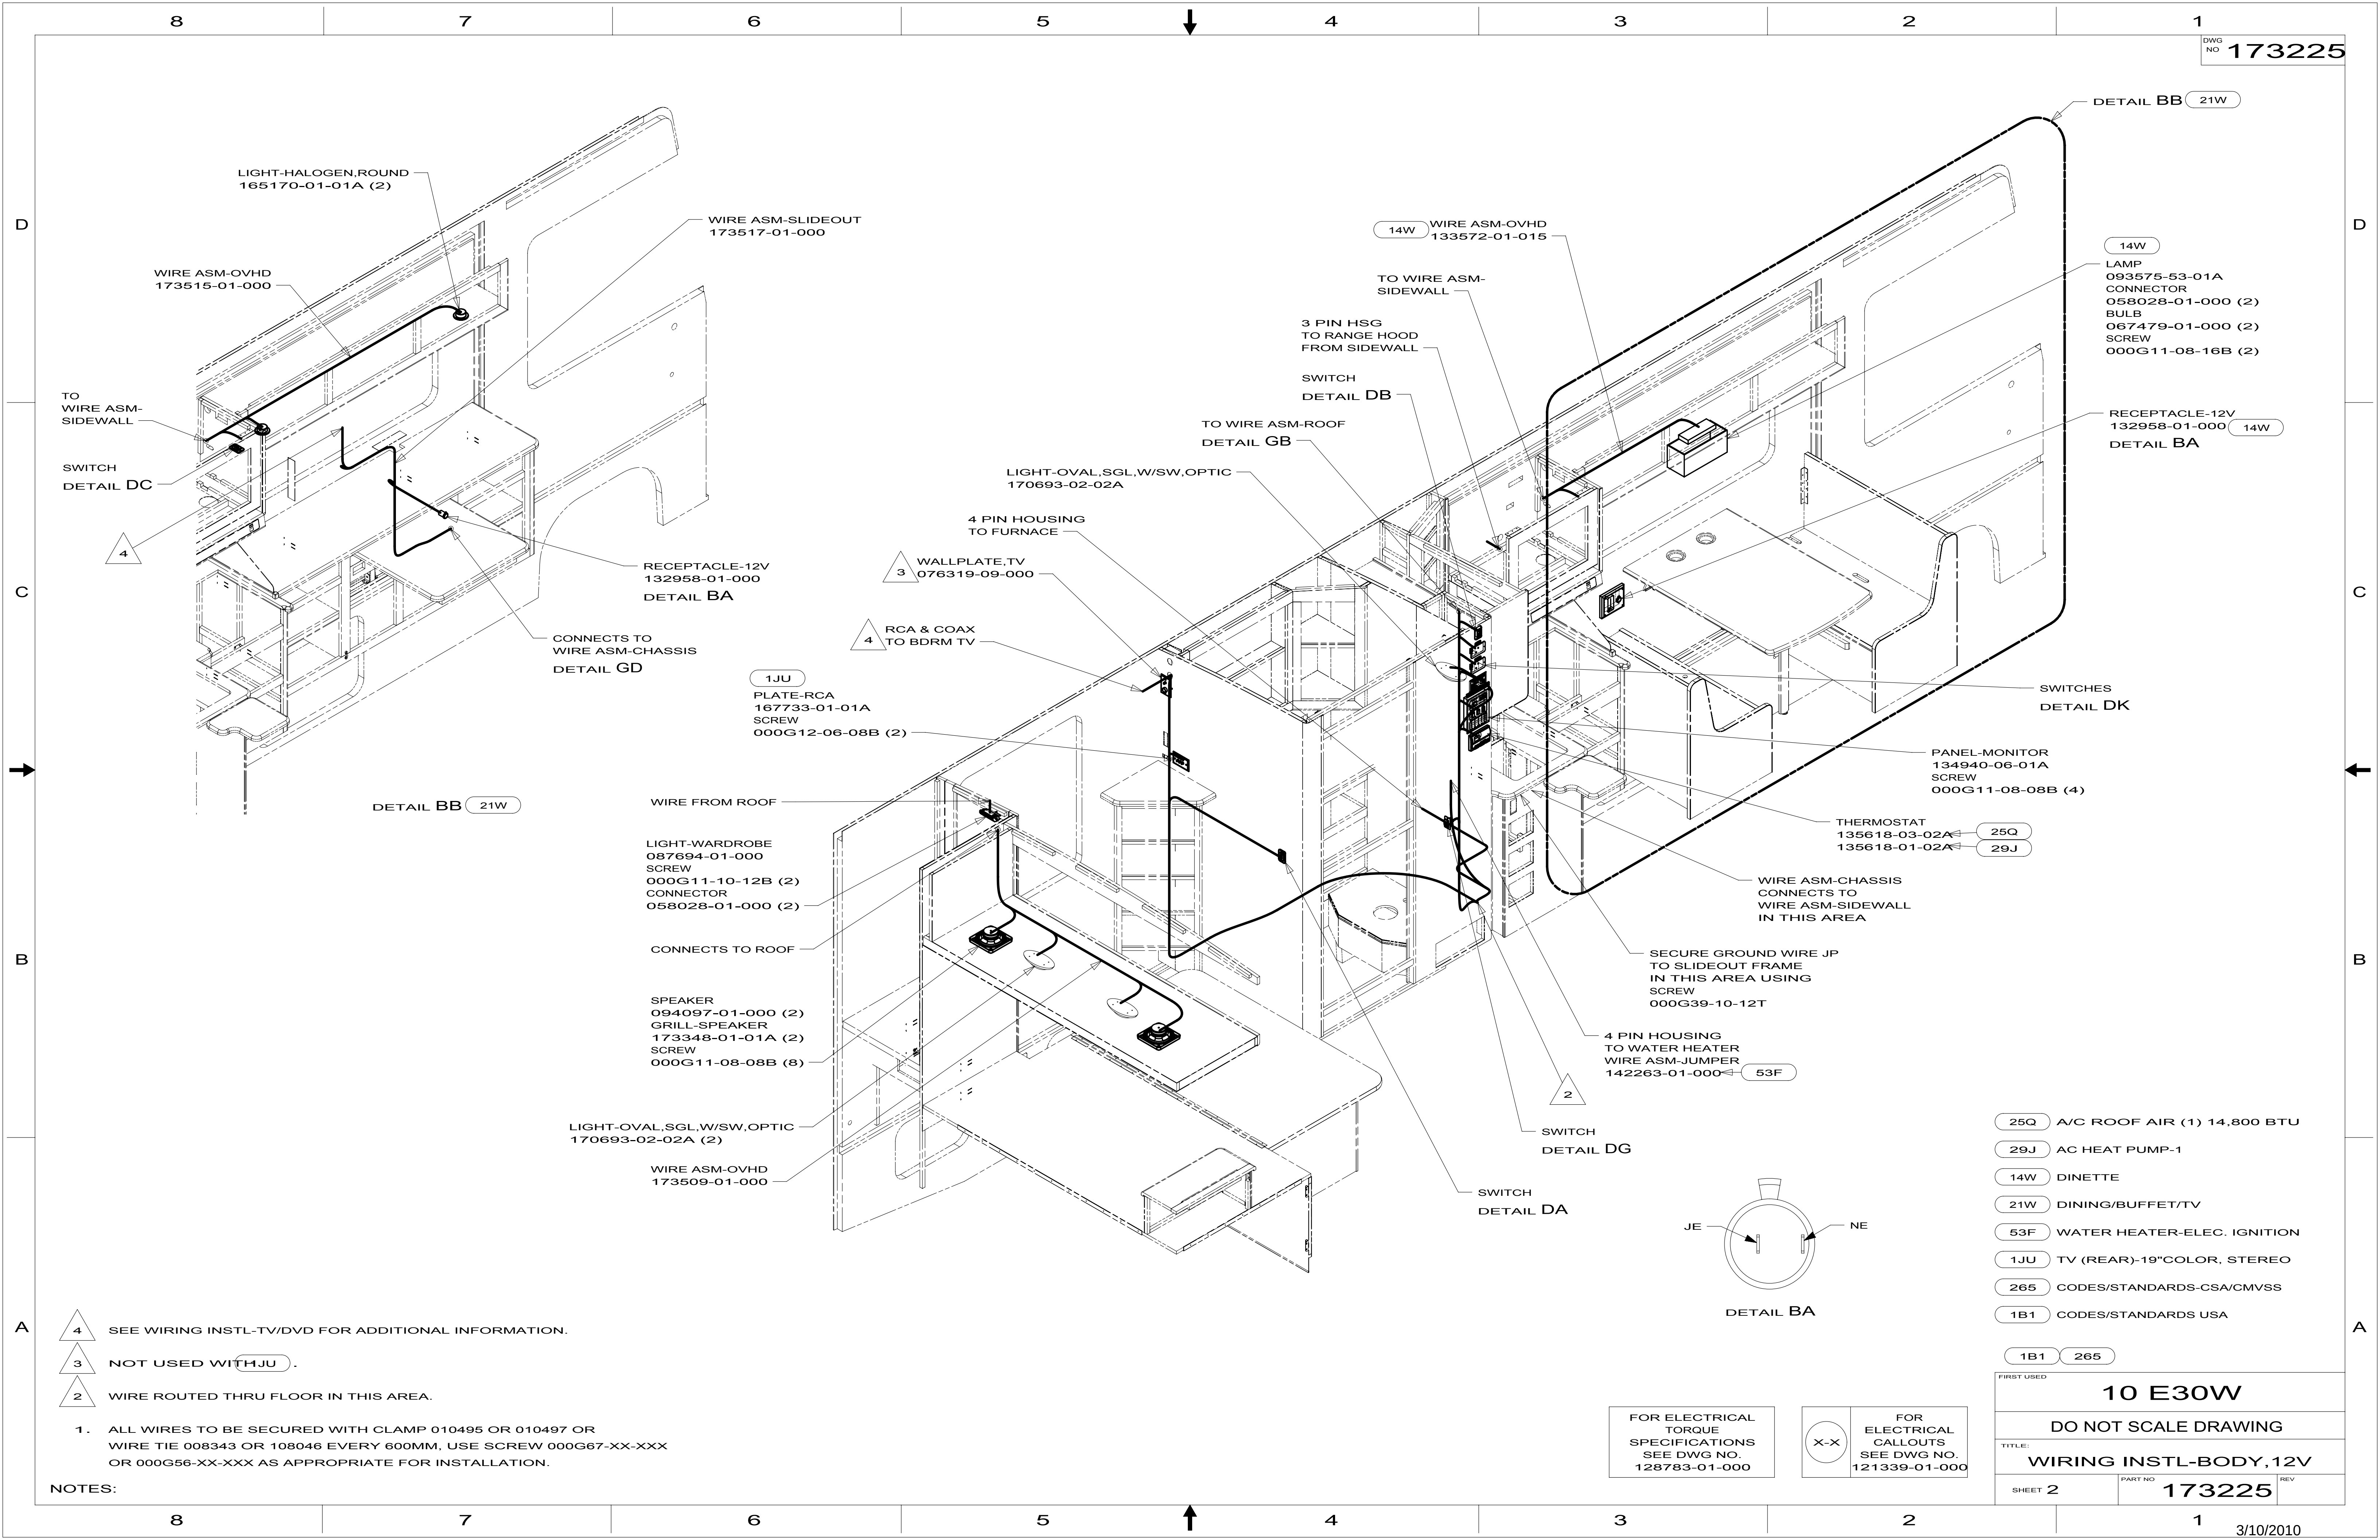


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED	10 E30W		
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-BODY, 12V			
SHEET 2	PART NO	173225	REV

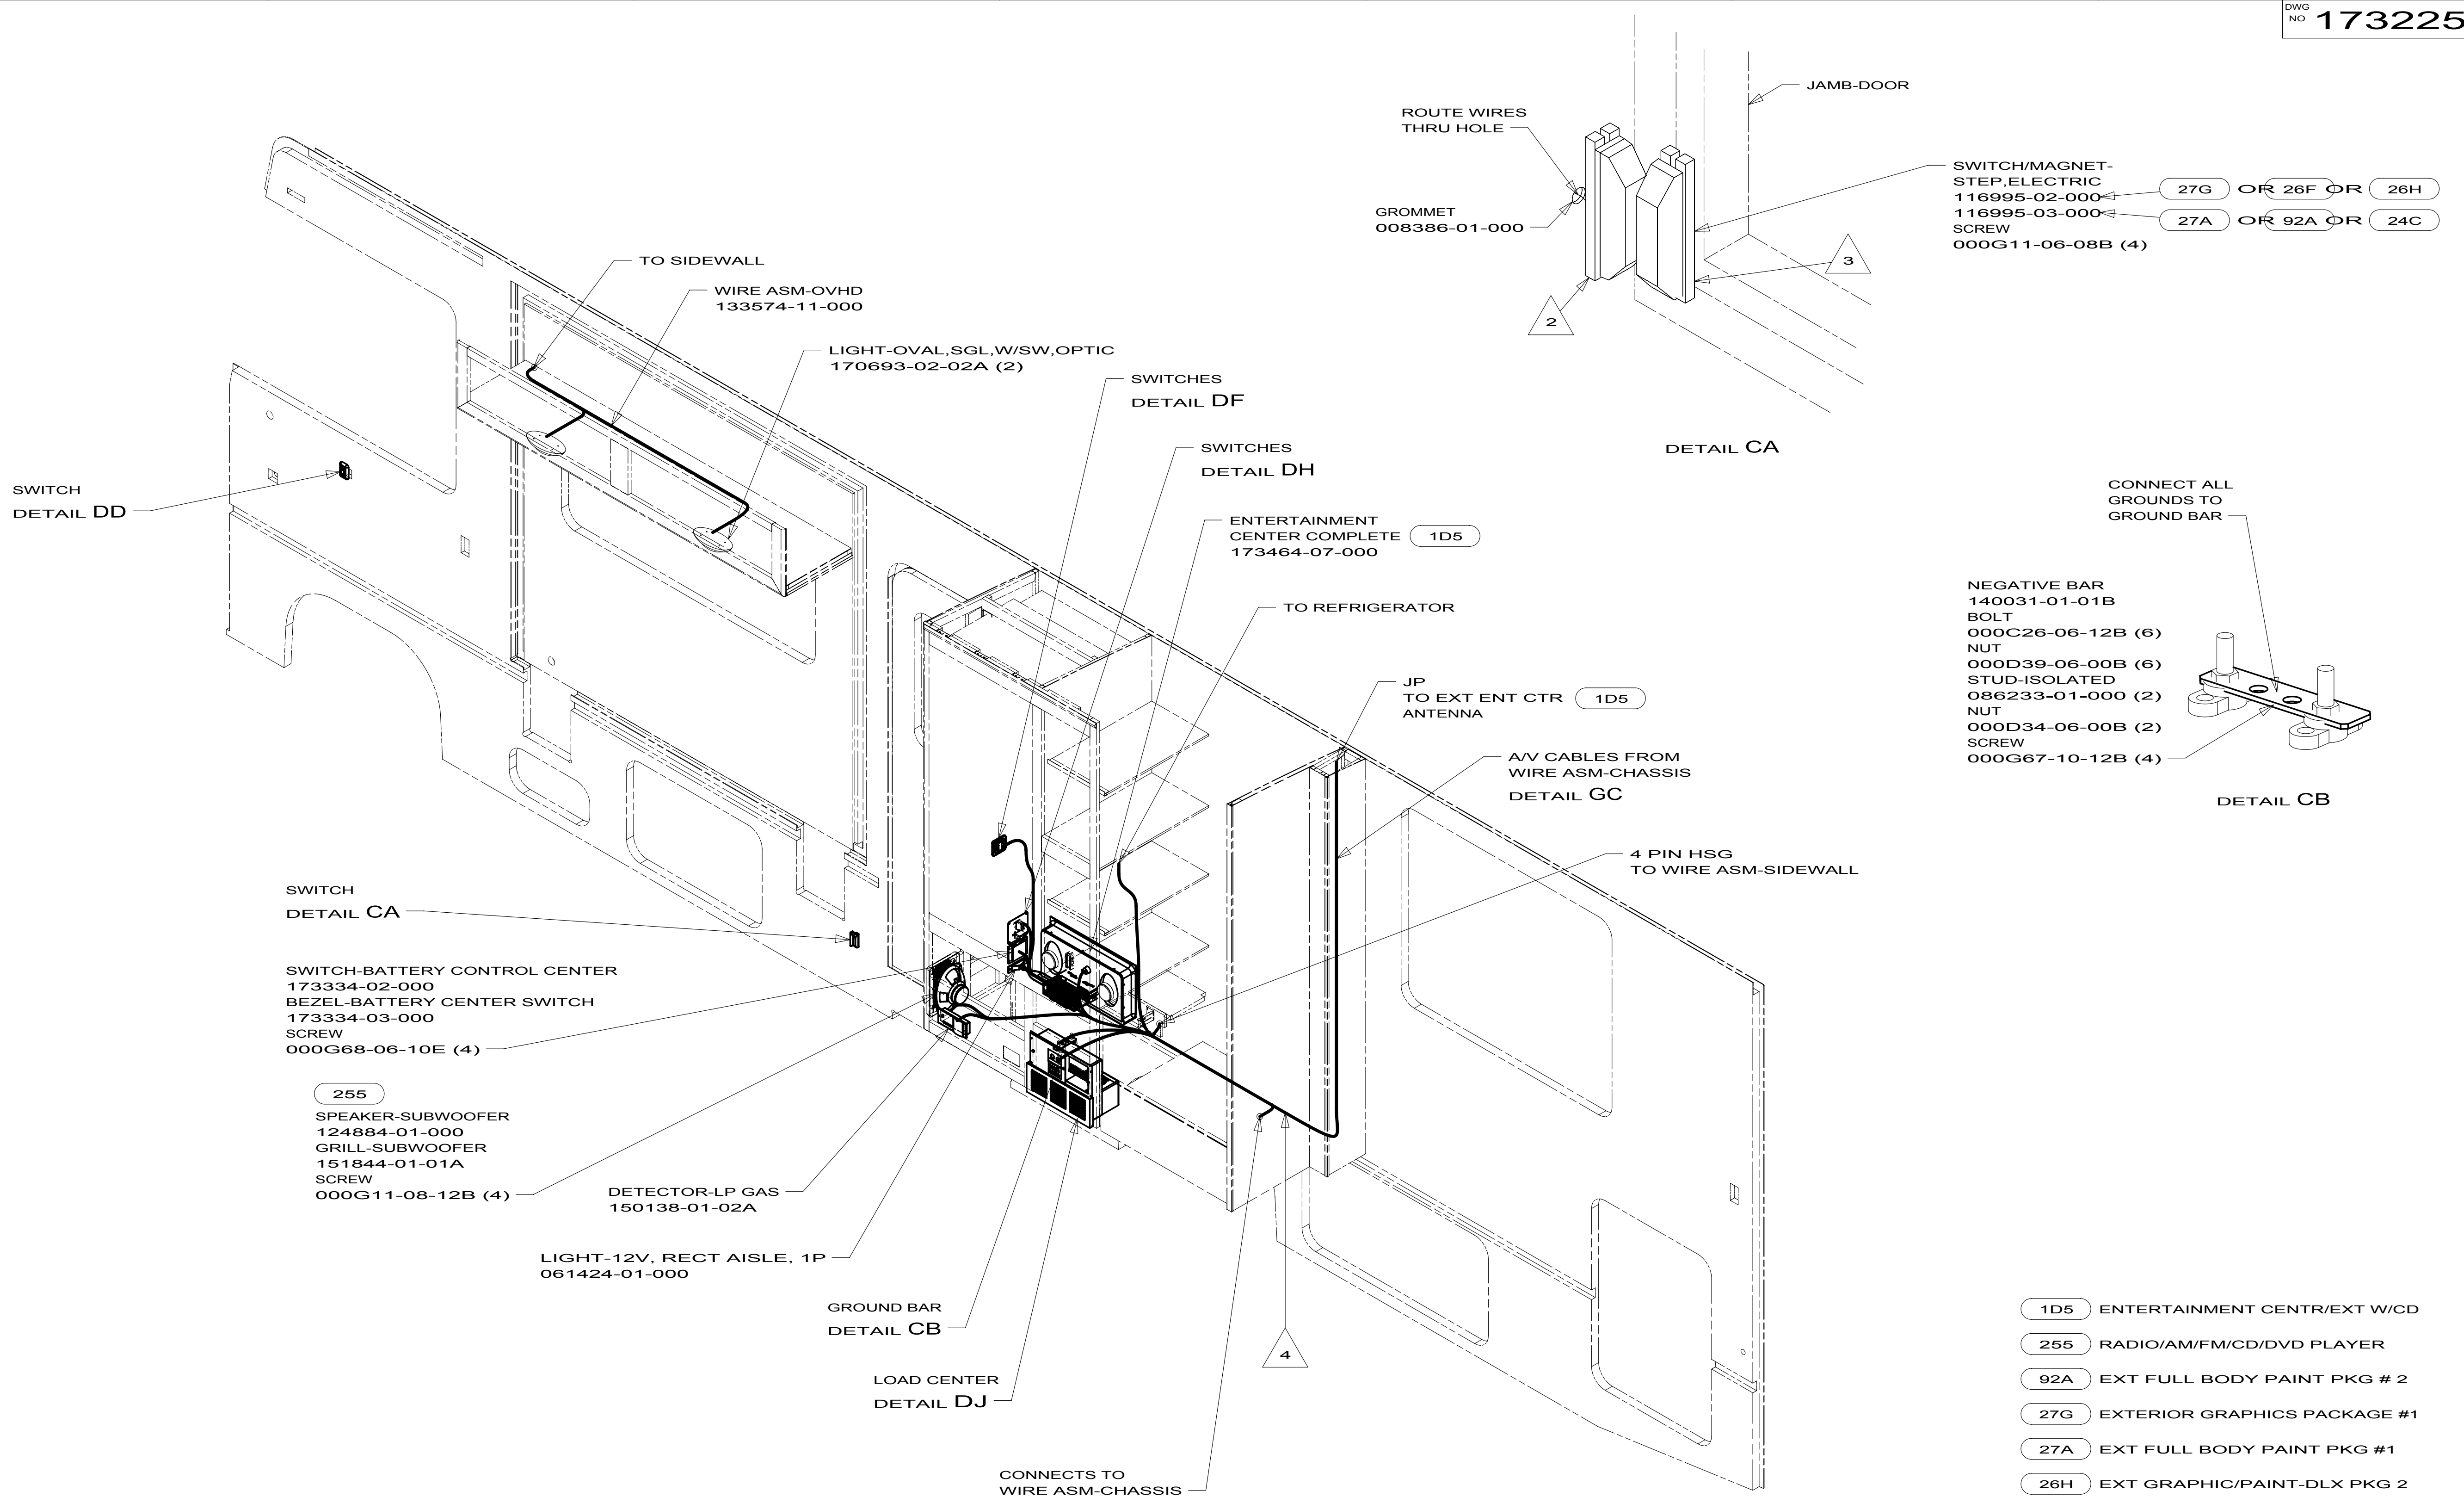

- 1D5 ENTERTAINMENT CENTR/EXT W/CD
- 255 RADIO/AM/FM/CD/DVD PLAYER
- 92A EXT FULL BODY PAINT PKG # 2
- 27G EXTERIOR GRAPHICS PACKAGE #1
- 27A EXT FULL BODY PAINT PKG #1
- 26H EXT GRAPHIC/PAINT-DLX PKG 2
- 26F EXT GRAPHIC/PAINT DLX PKG 1
- 24C EXT FULL BODY PAINT PKG # 3
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 E30W		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 3	PART NO 173225	REV


- 4 WIRES ROUTED THROUGH FLOOR IN THIS AREA.
- 3 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME, MOUNT WITH MAGNET TOWARD SWITCH.
- 2 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB, ADJUST HEIGHT TO MATCH MAGNET.

- ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600mm, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

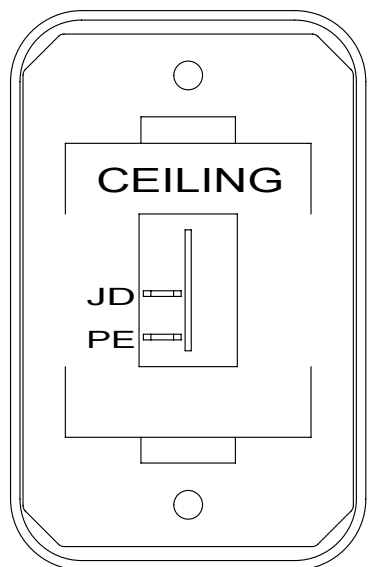


SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-07-02A
SCREW
000G11-08-08B (2)

DETAIL DA

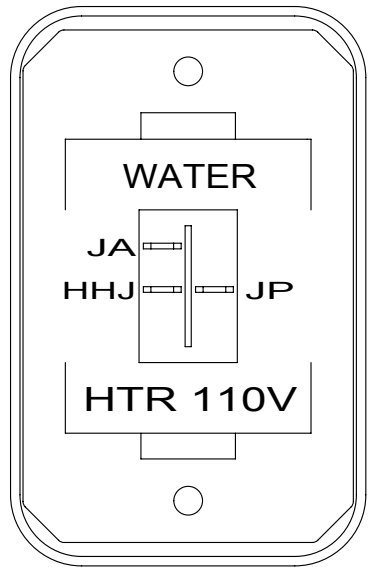


SWITCH-ROCKER
135740-06-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-35-02A
SCREW
000G11-08-08B (2)

DETAIL DB 53D

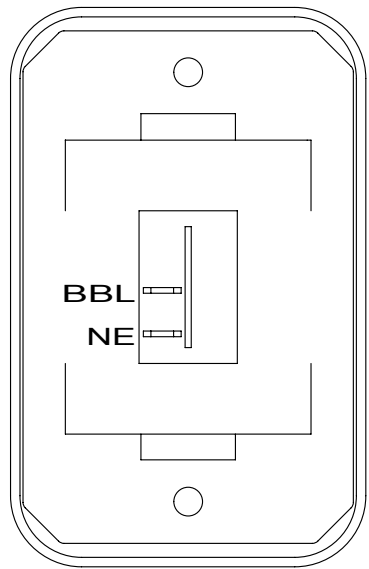


SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-01-01A
SCREW
000G11-08-08B (2)

DETAIL DC 21W

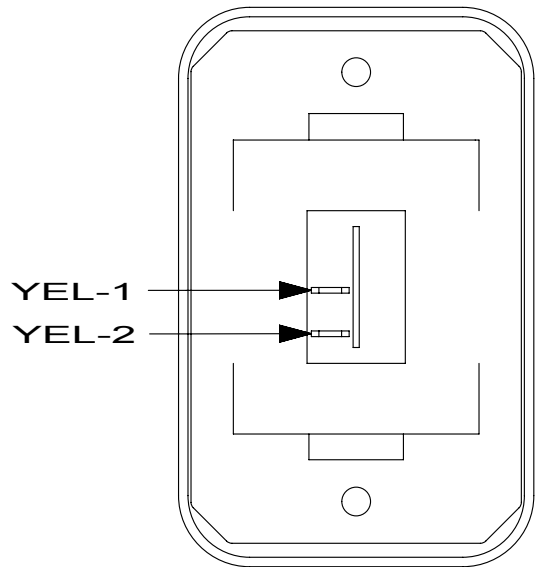


SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-01-01A
SCREW
000G11-08-08B (2)


DETAIL DD

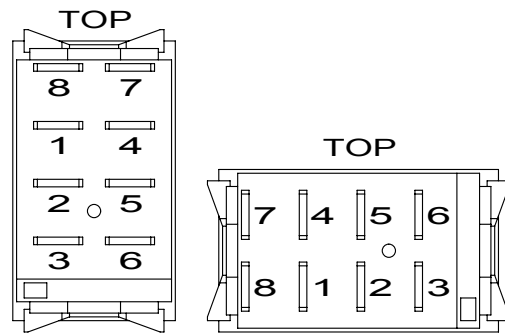


DETAIL DE

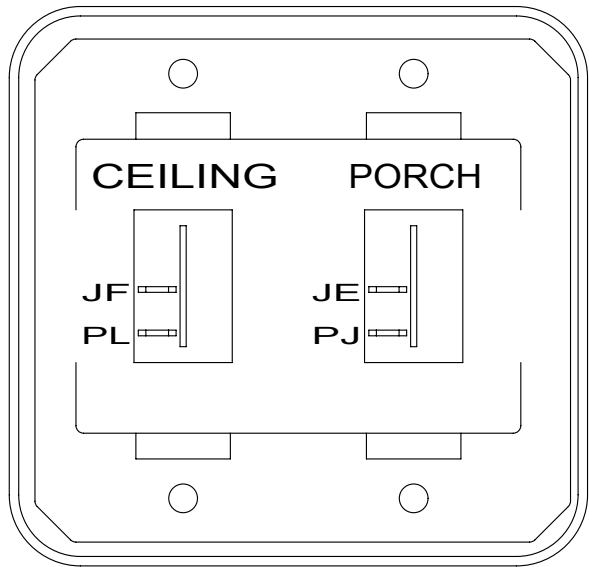

DETAIL DF

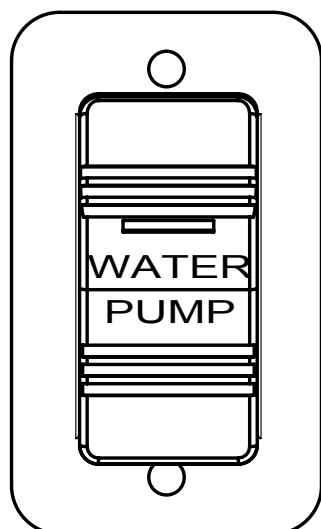

DETAIL DG

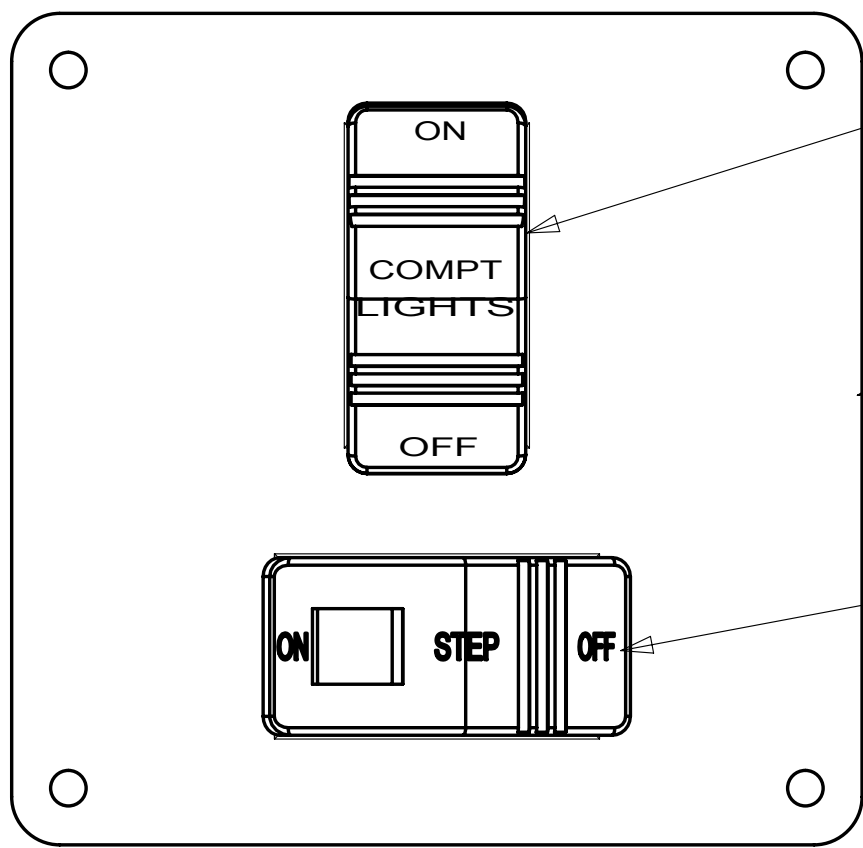


DETAIL DH 2





SWITCH-COMPT LIGHTS
108357-01-000
ACTUATOR-SWITCH
108356-14-01A
CIRCUITS WC,NW

PLATE-SWITCH
158431-20-04B
SCREW
000G11-06-10B (6)

SWITCH-STEP
108357-19-000
CIRCUITS ER,ES

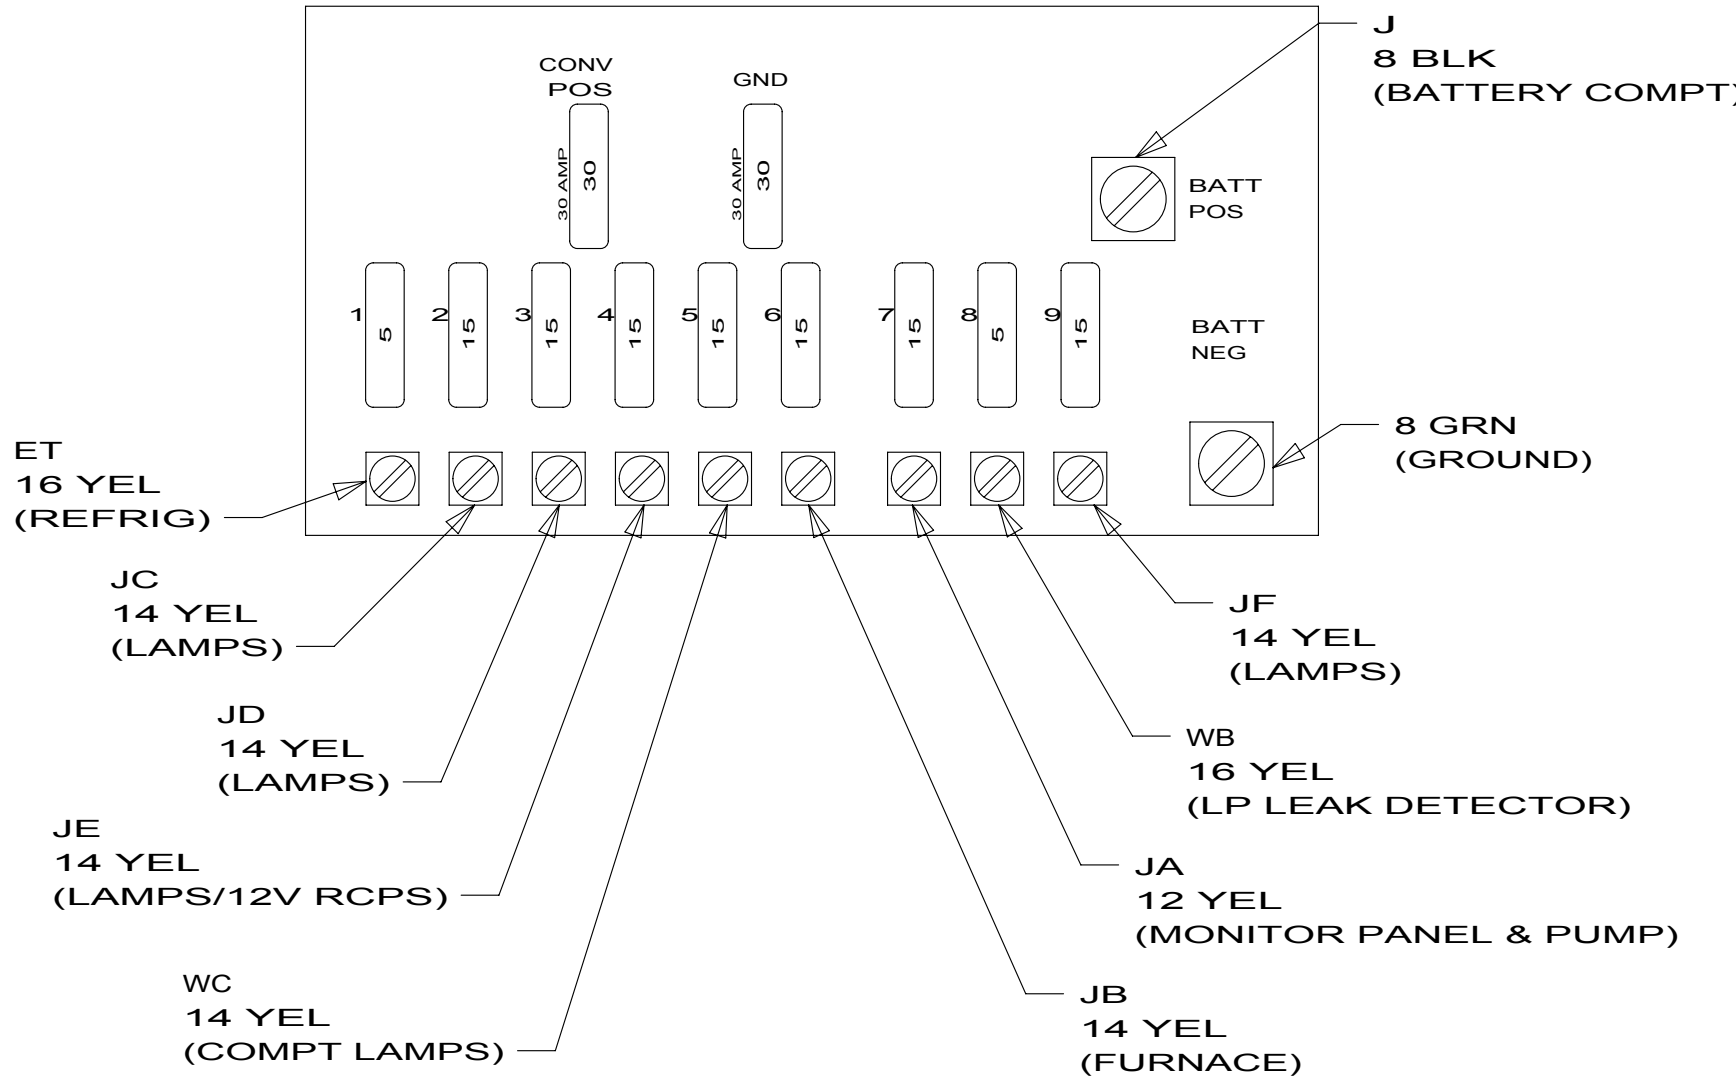

DETAIL DJ 1

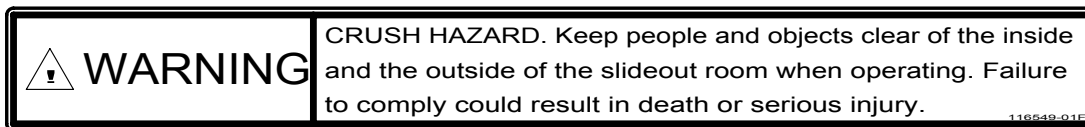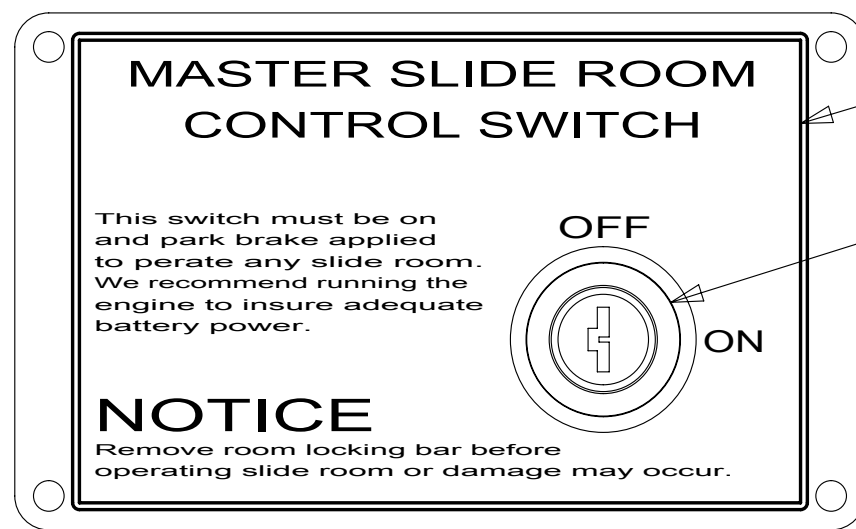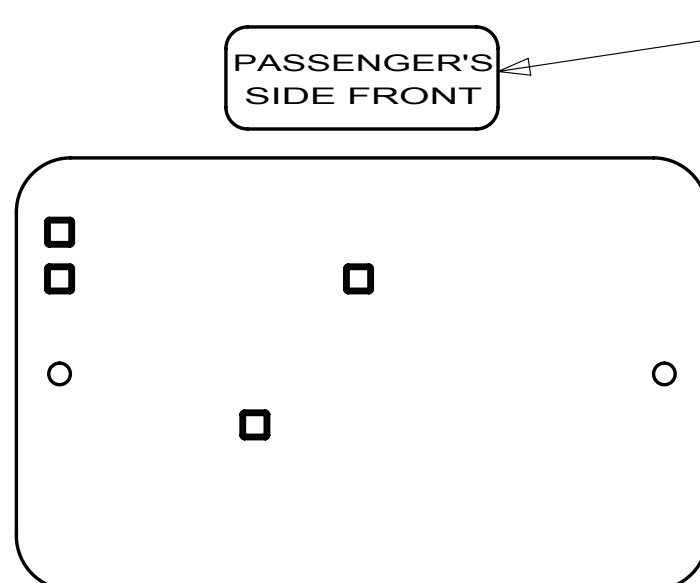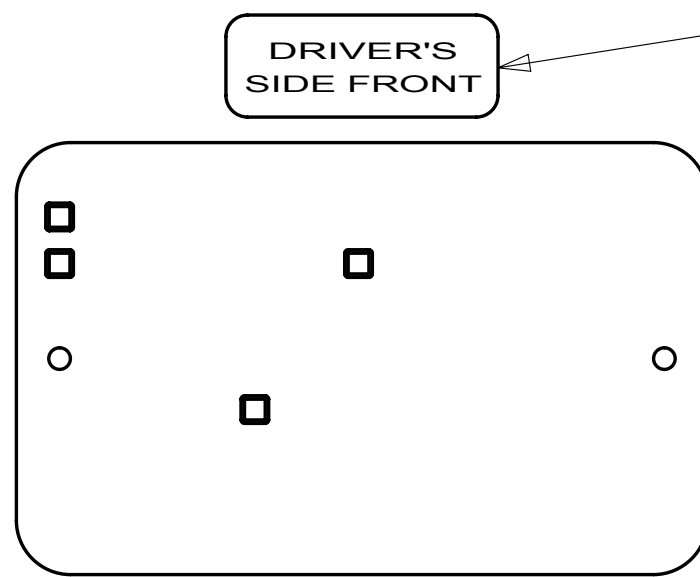

DETAIL DK

LABEL-SLIDROOM CONTROL, MAN
163988-01-01A

SWITCH-KEY, SPST-ILLINOIS LCK
163097-01-000
(CONNECTS TO CIRCUITS DY & DDJ)

PLATE-KEY, SLIDE ROOM
163987-01-02B
SCREW
076790-05-000 (4)

LABEL-WARNING, SLIDEOUT
116549-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 21W DINING/BUFFET/TV
- 53D WTR HTR-6GAL/ELE/LP/MOTORAID
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 E30W		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 4	PART NO 173225	REV

2 FOR SWITCH ORIENTATION SEE DETAIL DE
1 FOR REFERENCE ONLY. SEE LOAD CENTER
ASM FOR ADDITIONAL INFORMATION.

NOTES:

255
SPEAKER-ROUND,CEILING
160867-01-01A (2)
SCREW
OG1208-12-170 (8)

SATELLITE
ELEVATION
SENSOR
DETAIL EA

LIGHT-DOME,DBL,W/O SW,FROSTD
170693-05-02A (5)

LIGHT-DOME,DBL,W/SW,FROSTED
170693-07-02A

LIGHT-DOME,DBL,W/SW,FROSTED
170693-07-02A

3 PIN HOUSING
FROM WIRE ASM-
ELEVATION SENSOR

2 PIN HOUSING
FROM WIRE ASM-ROOF

DETAIL EA

LIGHT-OVAL,SGL,W/SW,FROSTED
170693-01-01A (UP TO 09-27-09)
LIGHT-OVAL,SGL,W/SW,OPTIC
170693-02-02A (AFTER 09-28-09)

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

255 RADIO/AM/FM/CD/DVD PLAYER

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

10 E30W

DO NOT SCALE DRAWING

TITLE:

WIRING INSTL-BODY,12V

SHEET 5


PART NO

173225

REV

1 SENSOR SUPPLIED WITH SATELLITE ASSEMBLY.

NOTES:

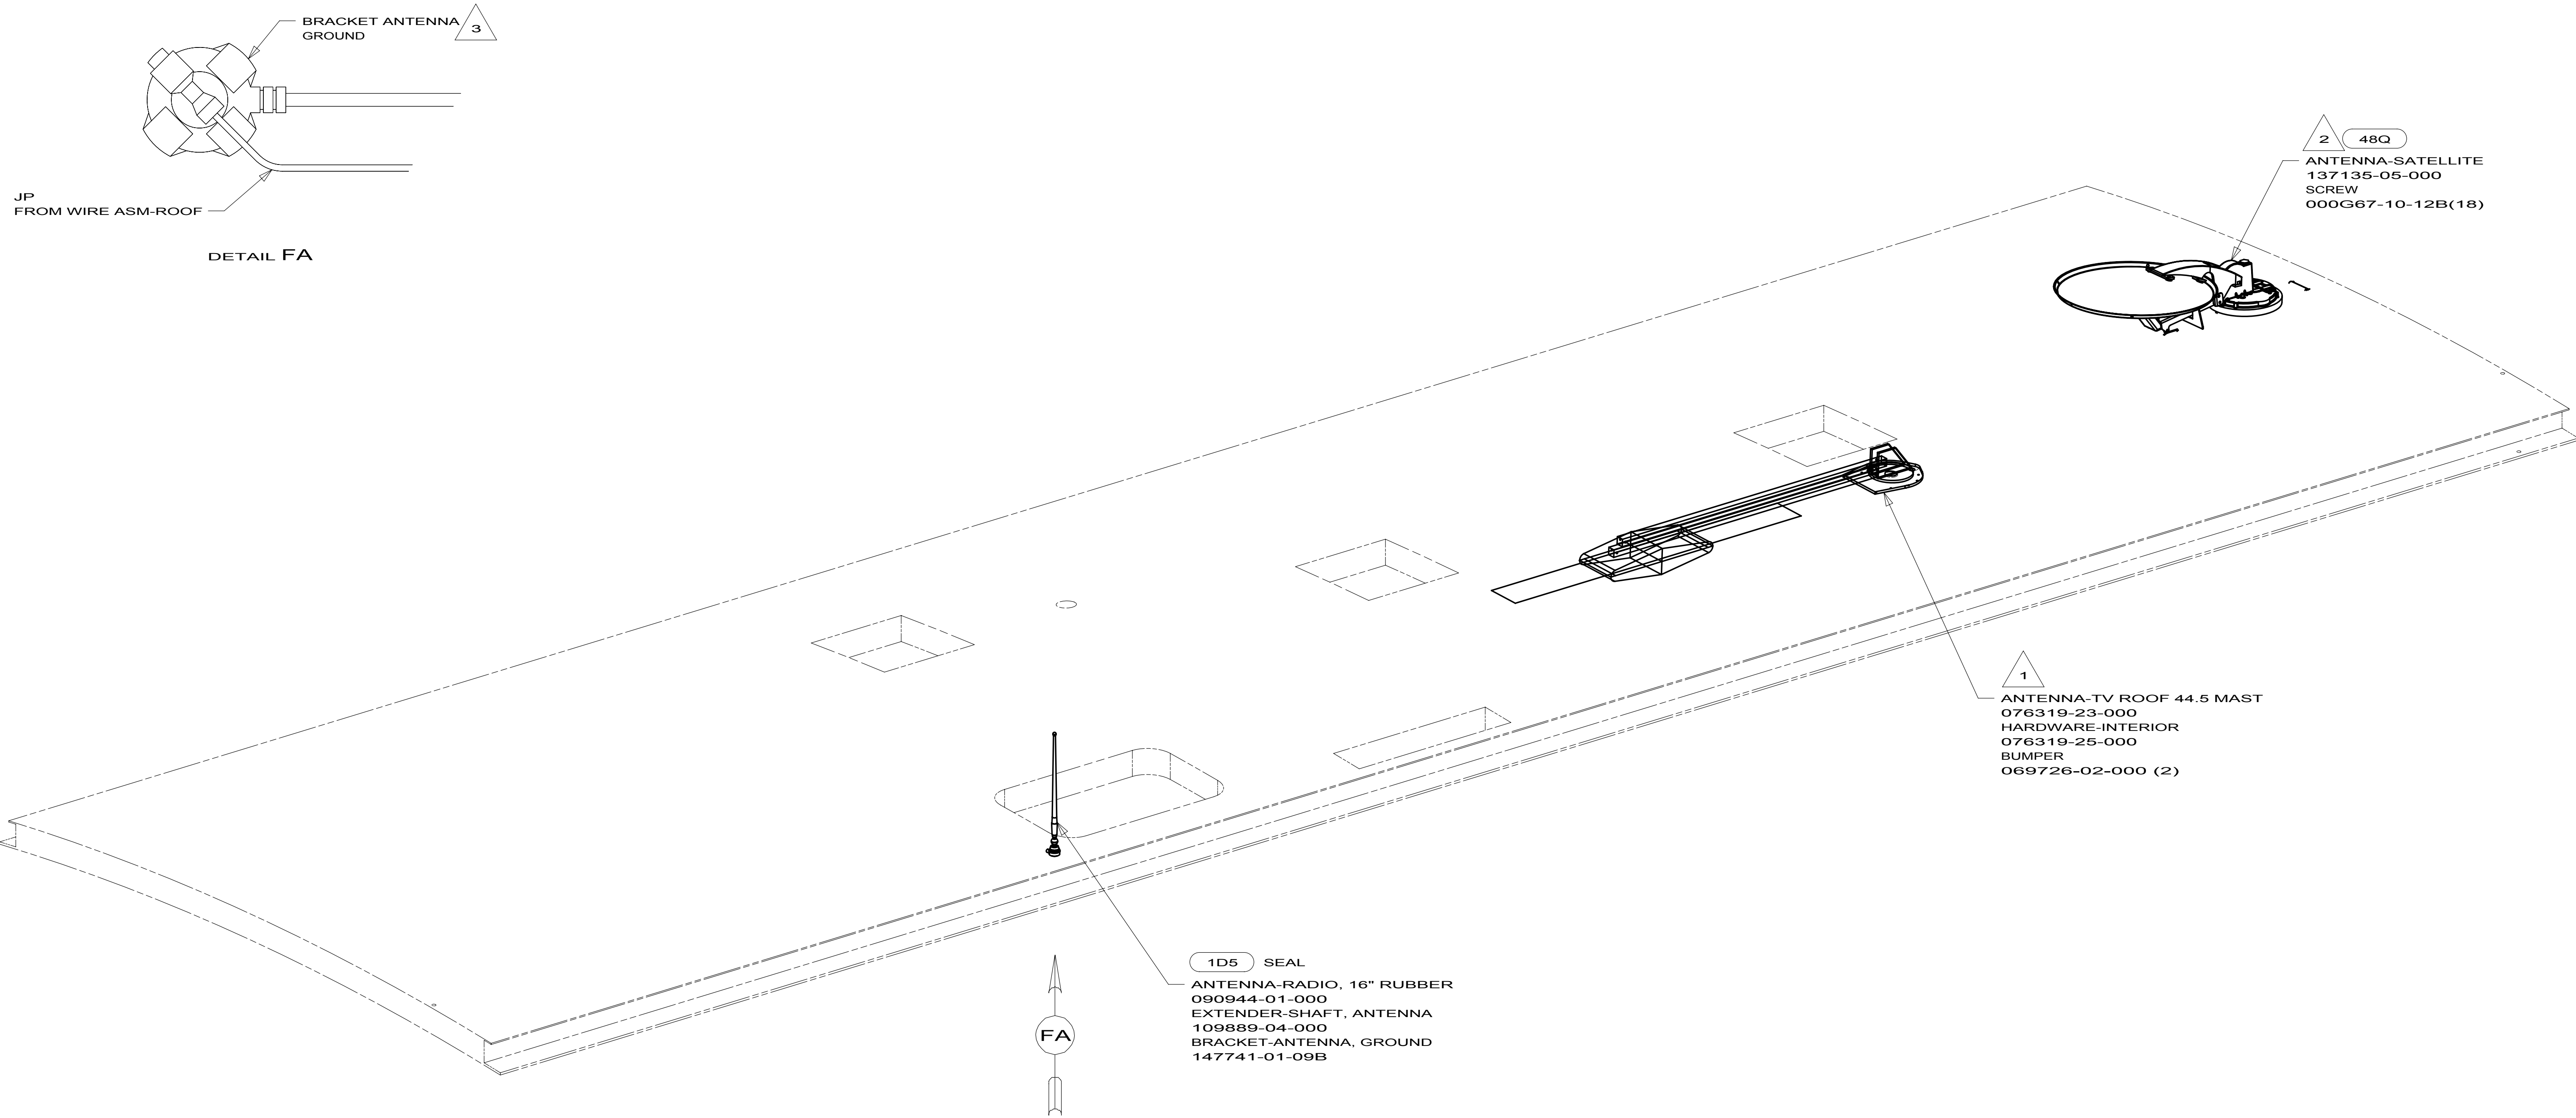

- 3 WRAP BRACKET LEGS AROUND ANTENNA BASE.
- 2 CONNECT THE ORANGE COAX FROM ROOF ASM TO ONE OF THE 2 GRAY COAX CABLES ON THE SATELLITE DISH, THE OTHER GRAY COAX IS NOT USED.
- 1 SEE DWG 076319-01-000 FOR INSTALLATION INSTRUCTIONS.

NOTES:

- 48Q SATELLITE DISH & ELEV.SENSOR
- 1D5 ENTERTAINMENT CENTR/EXT W/CD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FIRST USED		
10 E30W		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 6	PART NO 173225	REV

D


C

B





A

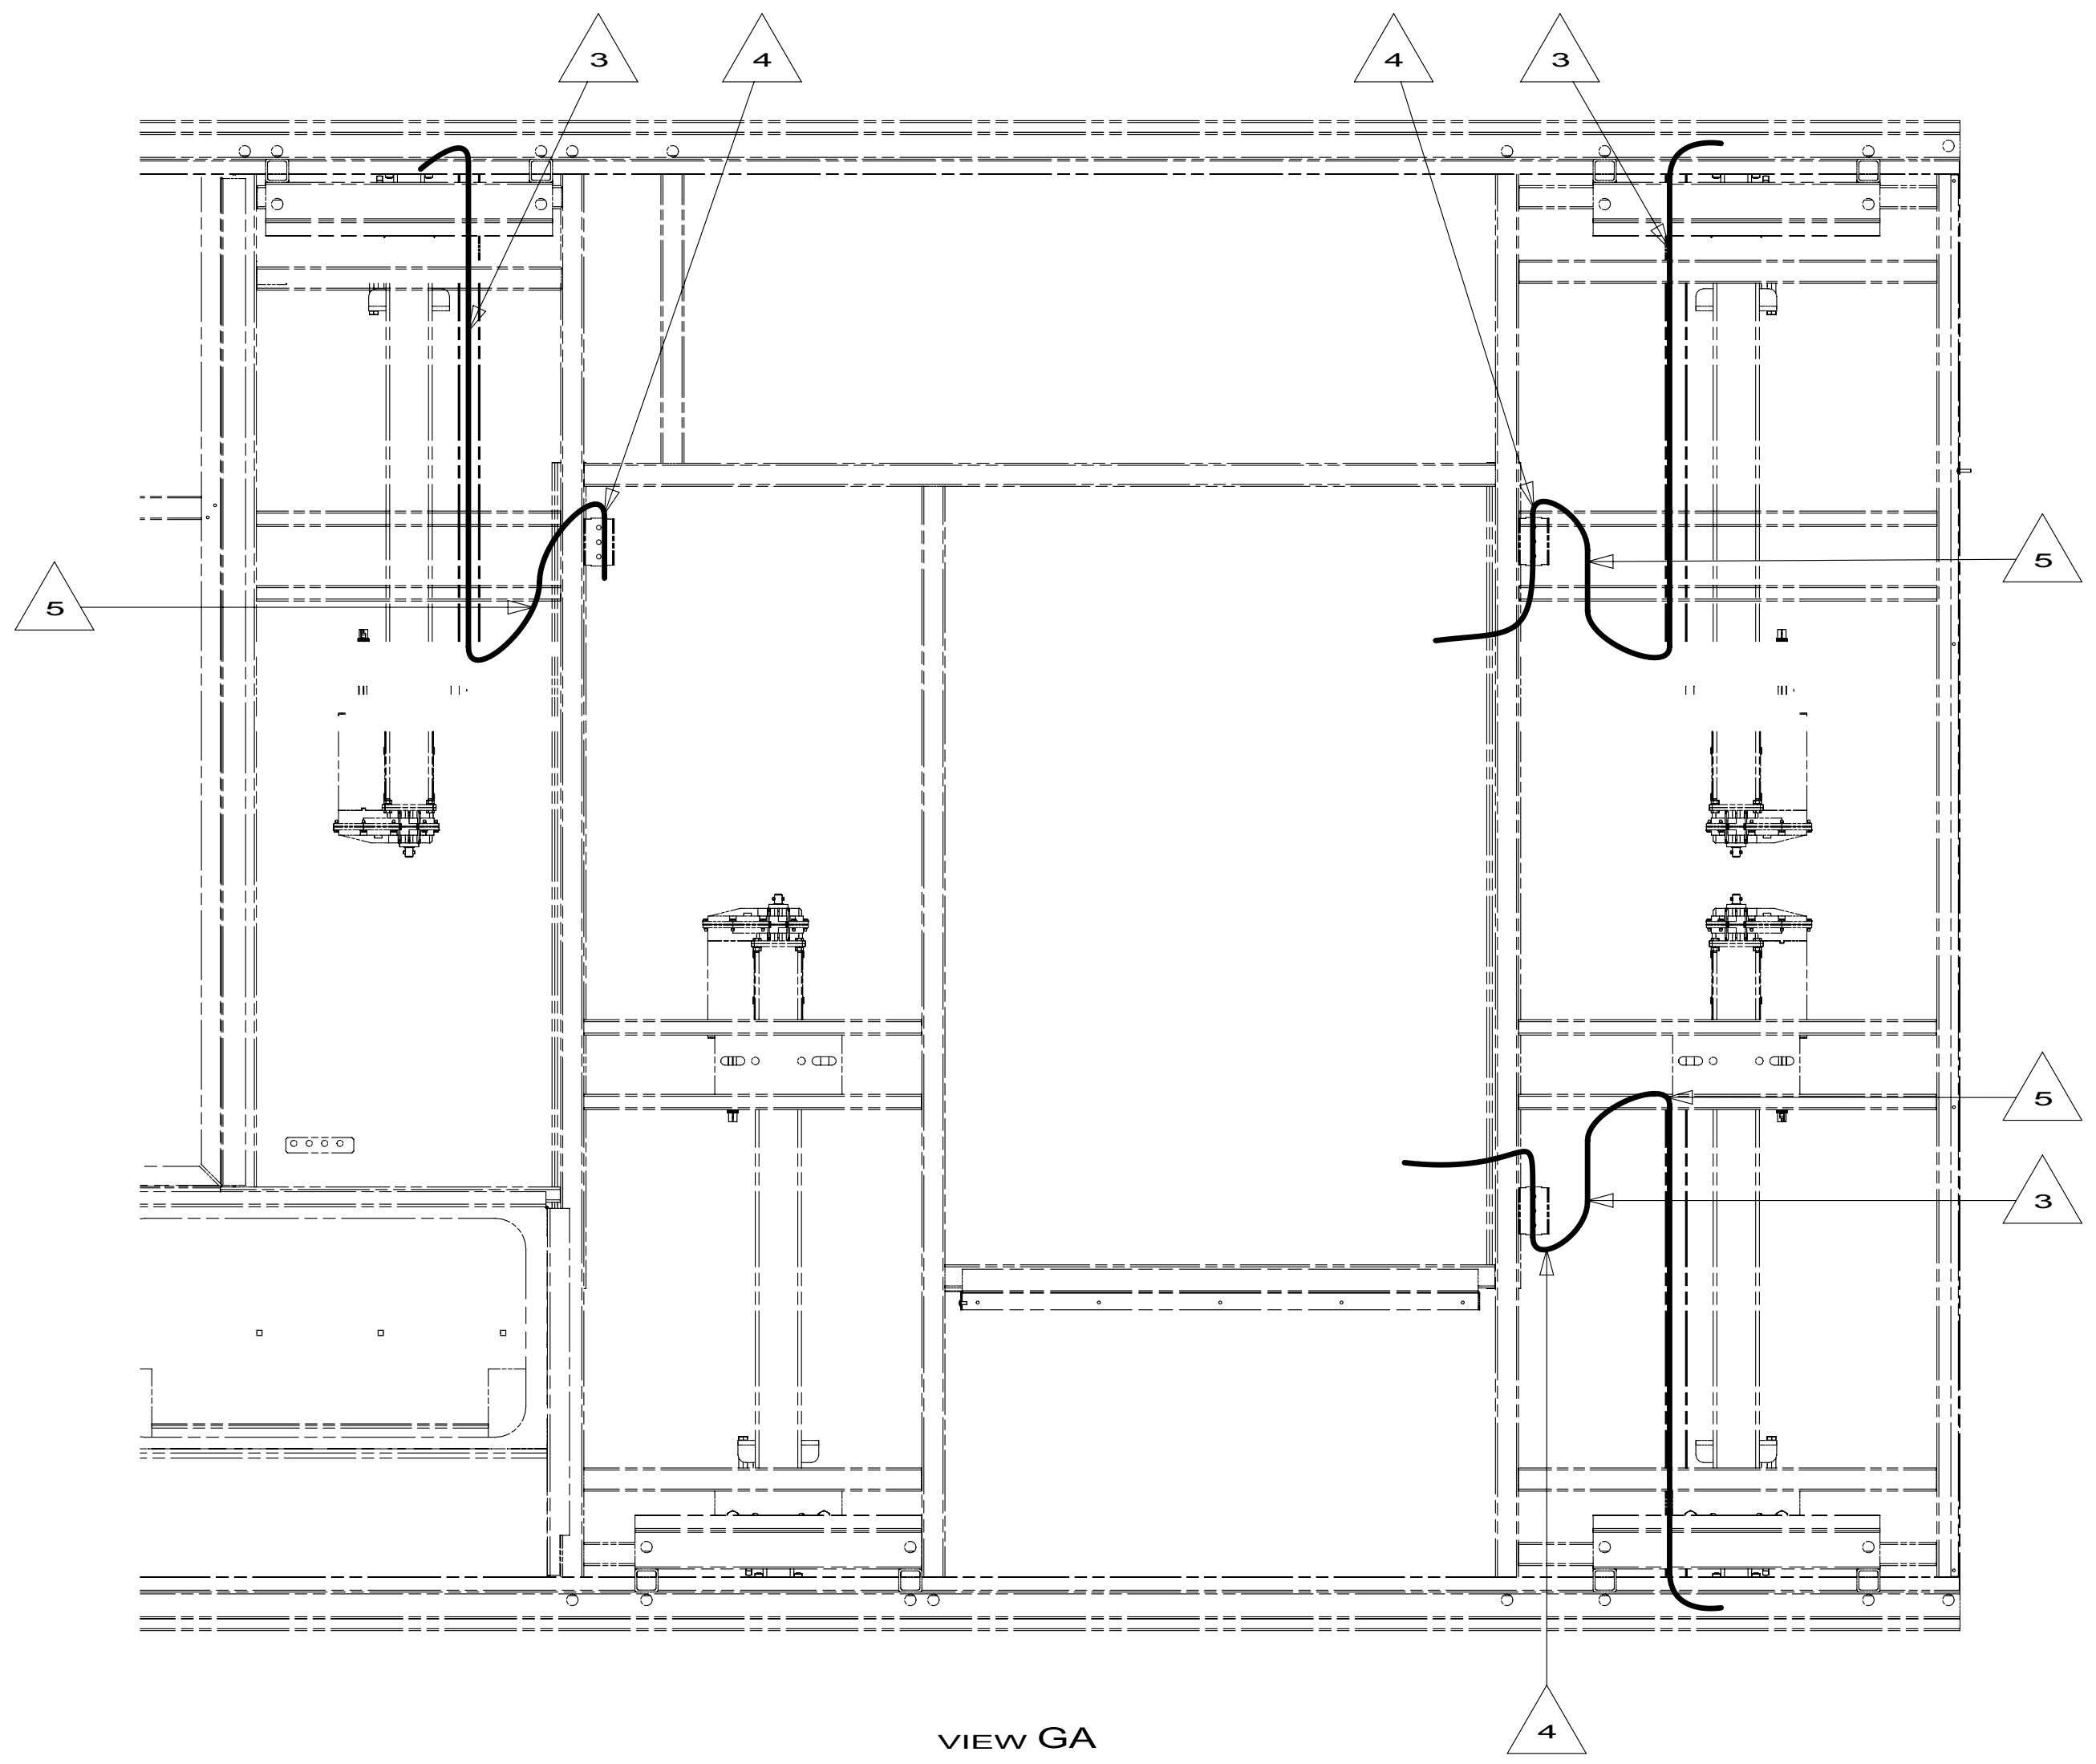





VIEW GA

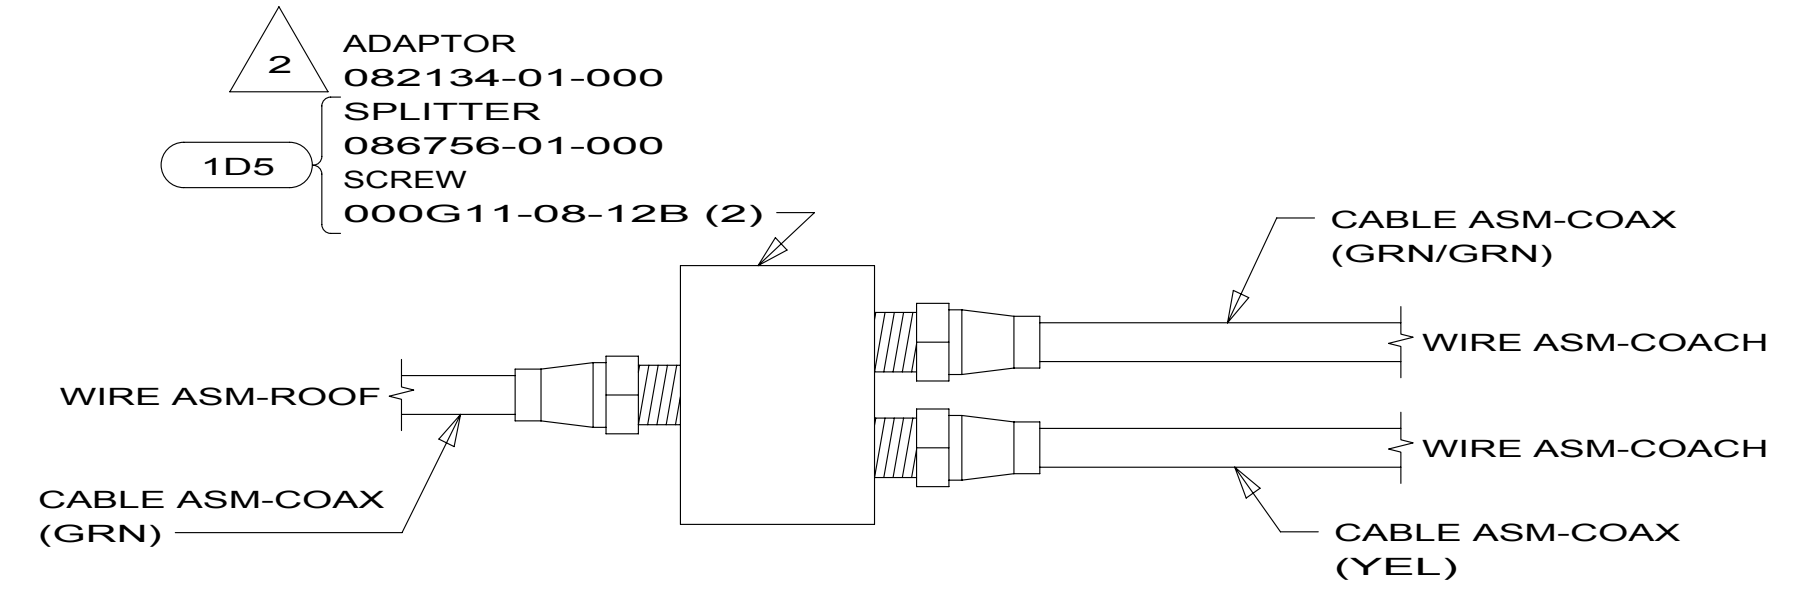

DETAIL GB

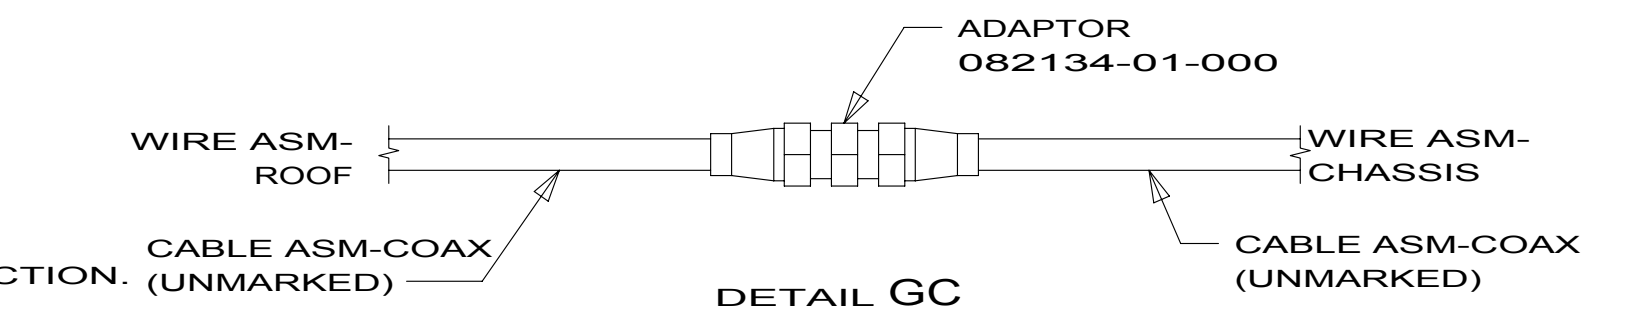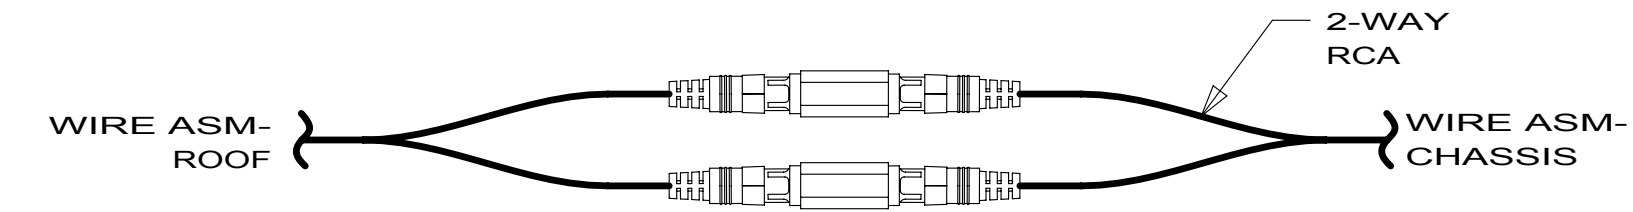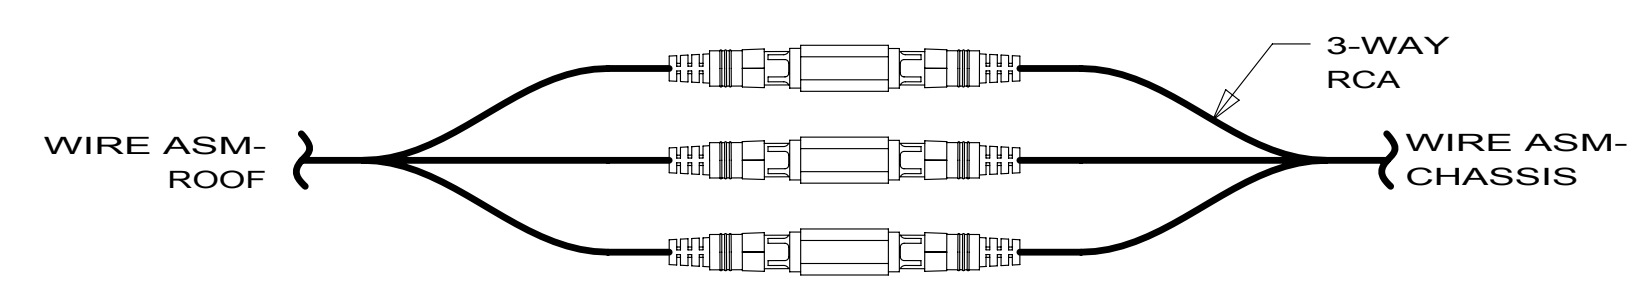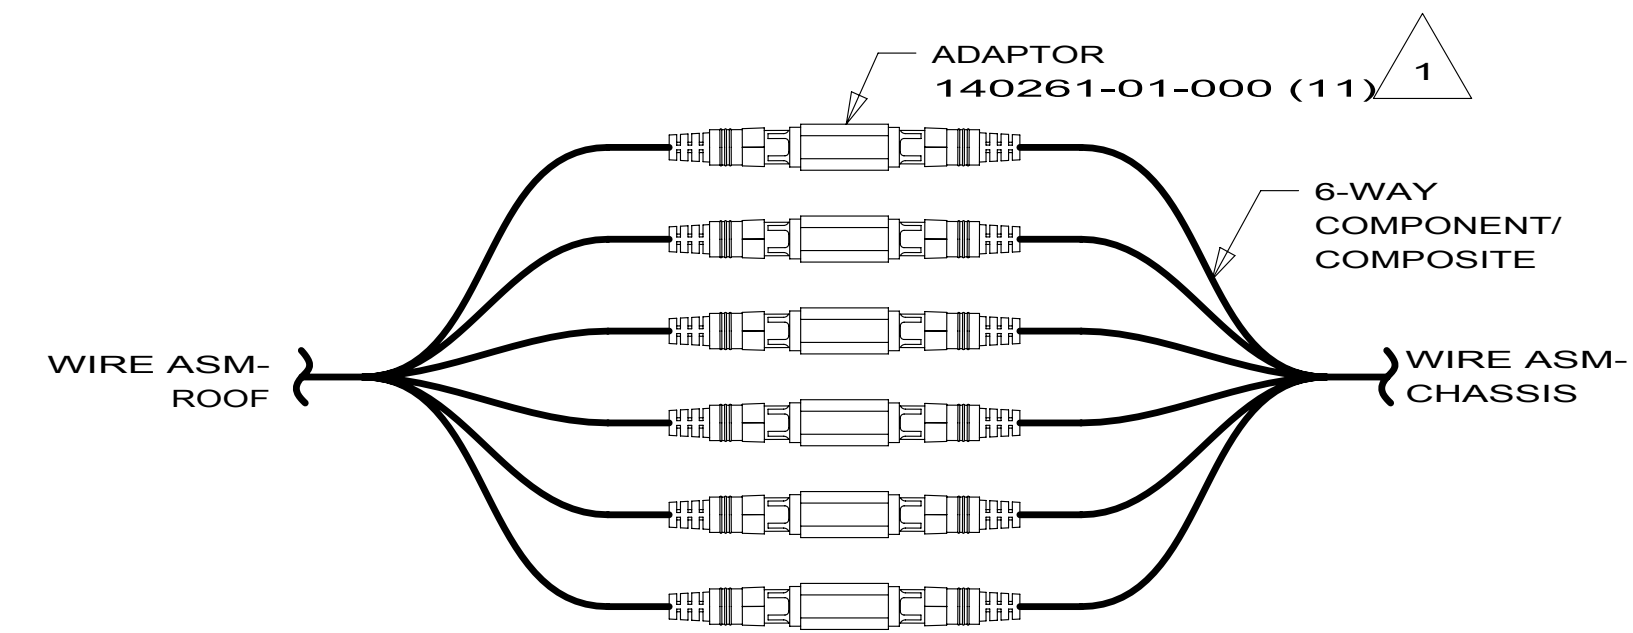

DETAIL GC

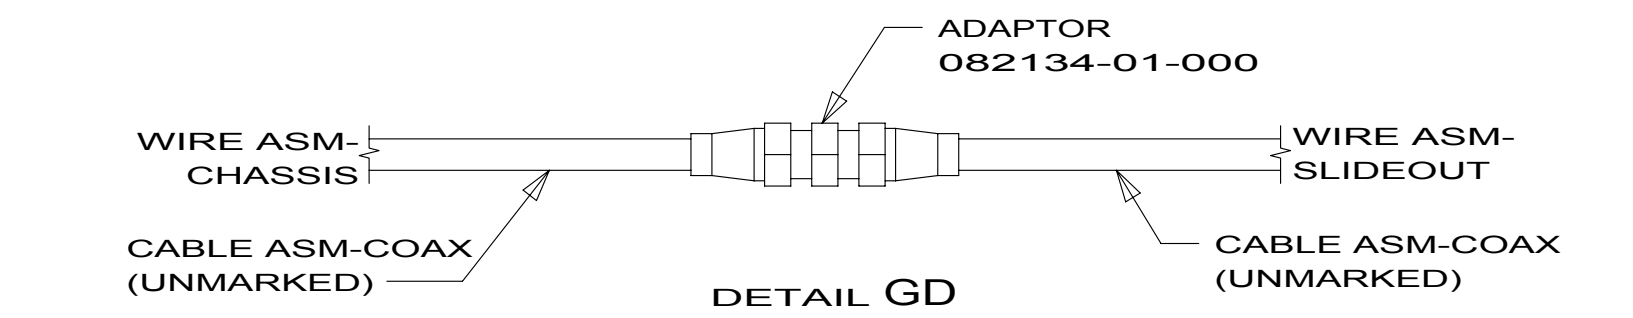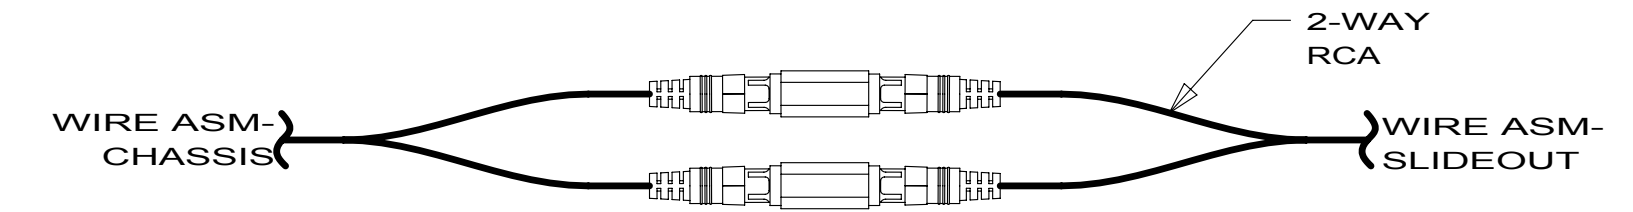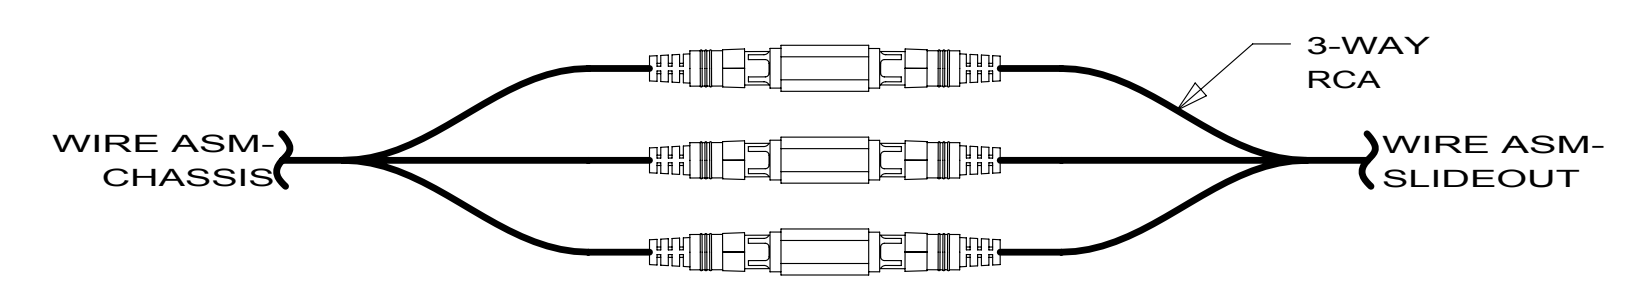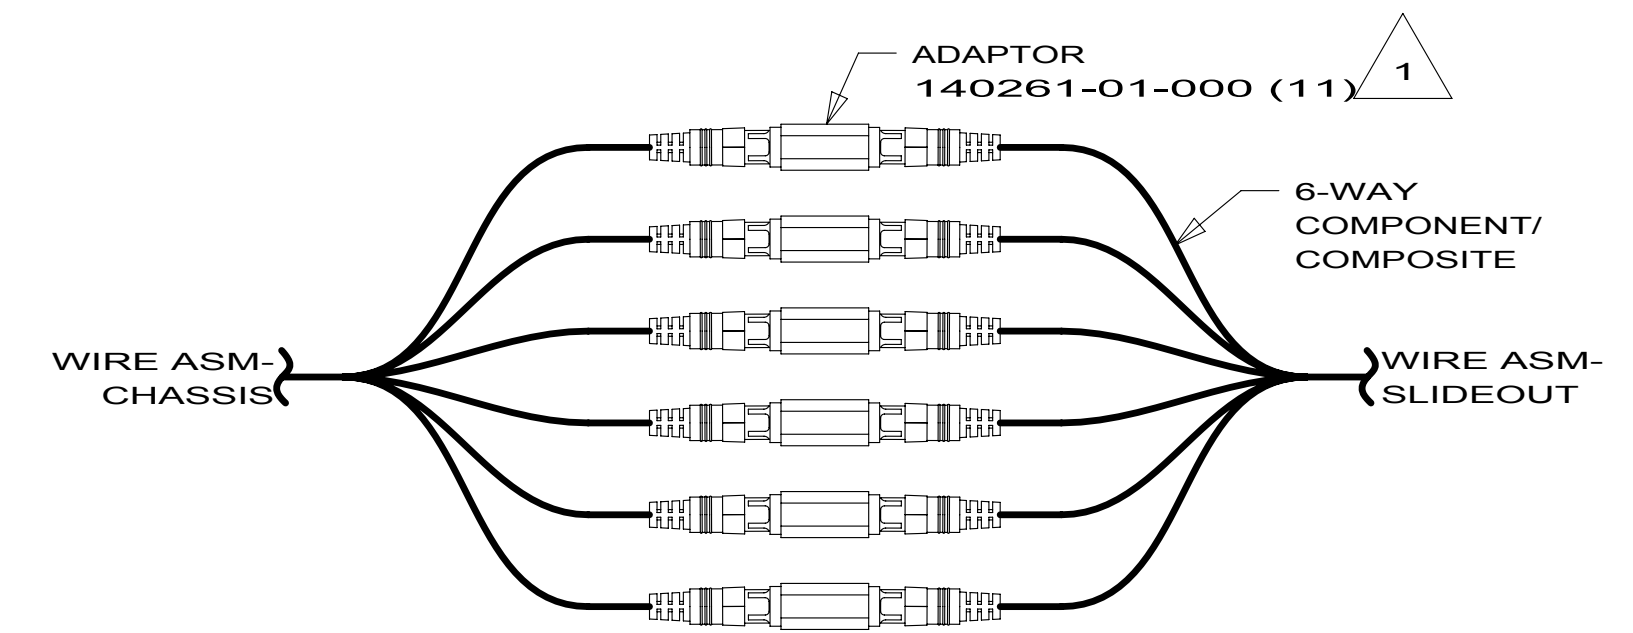


DETAIL GD

6. USE WIRE TIE 008343-02-000 AND SECURE WIRE HARNESS TO WIRE TRAYS.
- 5 WITH SLIDEOUT ROOM IN, ALLOW 400 MM OF WIRE BETWEEN U-CHANNEL, WIRE TRAY AND SUPPORT ASM-WIRE FOR PROPER OPERATION.
- 4 CONVOLUTE TUBING STOPS HERE AND BRAIDED SLEEVING STARTS
- 3 WIRES PART OF WIRE ASM-CHASIS
- 2 WITHOUT 1D5 USE ADAPTOR AND CONNECT GRN COAX TO GRN/GRN COAX.
- 1 WRAP BOTH ENDS OF ADAPTOR WITH TAPE 008363-01-000 TO SECURE CONNECTION.

NOTES:

1D5	ENTERTAINMENT CENTR/EXT W/CD
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265

FIRST USED		
10 E30W		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 7	PART NO 173225	REV

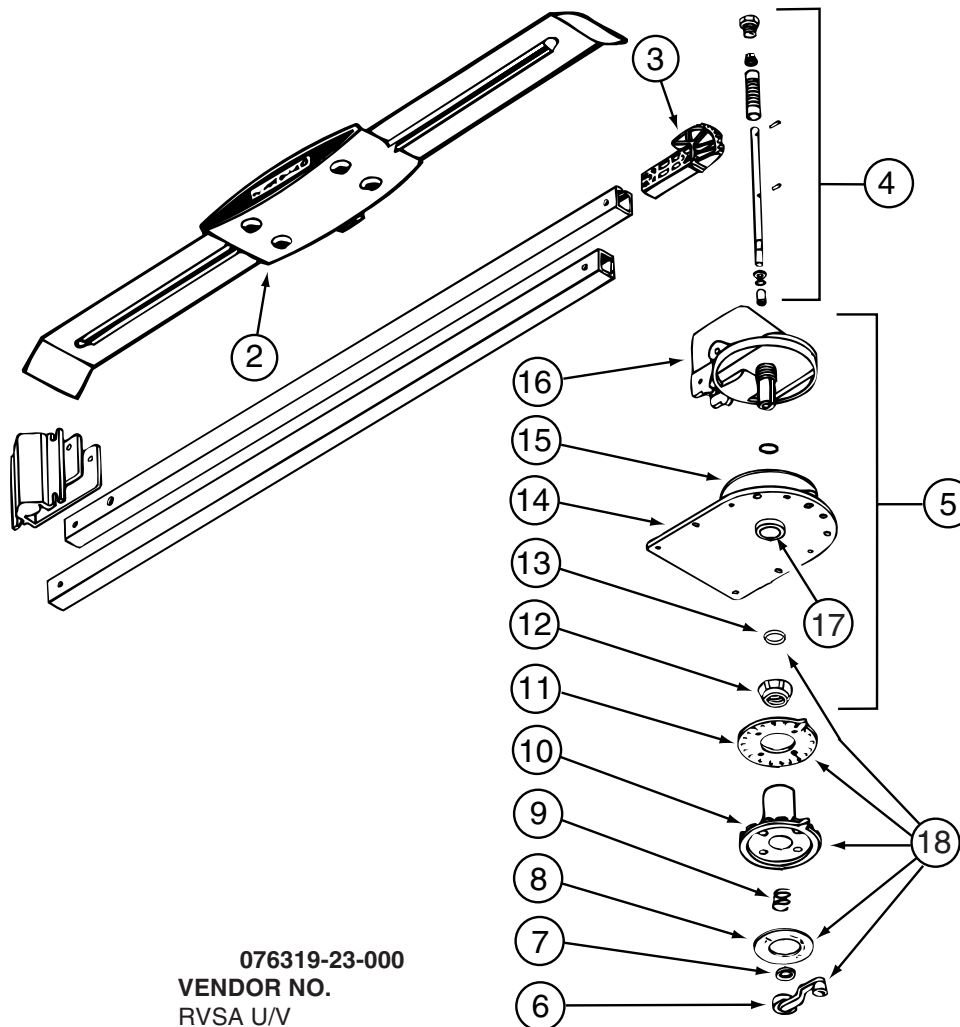


KEY PART NUMBER

2	076319-01-700	EA	HEAD-ANTENNA, AMPLIFIED
3	076319-01-701	EA	GEAR-ELEVATING, PLASTIC
4	076319-01-702	EA	SHAFT ASM-ELEVATING
5	076319-01-711	EA	BASE & LIFT ASM
7	076319-01-705	EA	GROMMET-NYLON, 7/8"ID
8	076319-01-708	EA	DECAL-CRANK
9	076319-01-707	EA	SPRING-HANDLE
11	076319-01-712	EA	PLATE - CEILING
12	076319-01-715	EA	NUT (GEAR HOUSING)
14	076319-01-713	EA	PLATE-BASE, STEEL
15	076319-01-703	EA	BEARING-NYLON, 5"OD
16	076319-01-714	EA	HOUSING, ROTATING GEAR
17	076319-01-704	EA	BEARING-NYLON, 1.25"OD
18	076319-01-709	EA	HANDLE-HEAD DIRECTIONAL
	076319-01-716	EA	TUBING, ELEVATING

076319-23-000
VENDOR NO.

RVSA U/V
2200046
RP-4000
2762802
3200658
5413002
2160822
3200608
2200047
3100523
3200656
2200049
3200657
200644
RP-2900

CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)

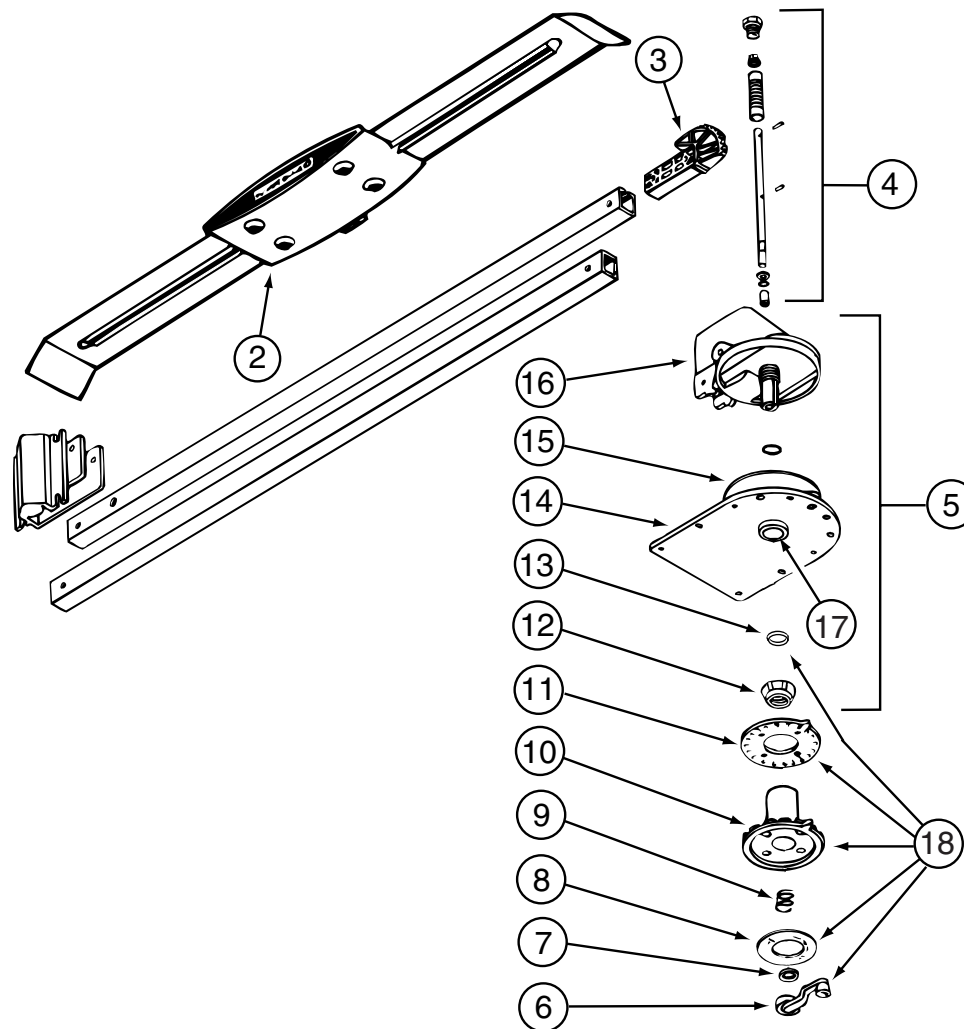


076319-25-000

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
6	076319-01-706	EA	CRANK-W/SET SCREW UNIV/BEIGE	2750897
6	120233-01-710	EA	HANDLE-CRANK W/SCREW - WHITE	RP-6795
8	076319-01-708	EA	DECAL-CRANK	5413002
10	076319-25-700	EA	DIRECTIONAL HANDLE(WHITE)	3200612
11	076319-25-701	EA	PLATE - CEILING(WHITE)	3200609
13	120233-01-709	EA	WASHER-NYLON	RP-2658
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

KEY	PART NUMBER	U/M	DESCRIPTION
	087694-01-700	EA	BULB

087694-01-000
VENDOR NO.
GE561

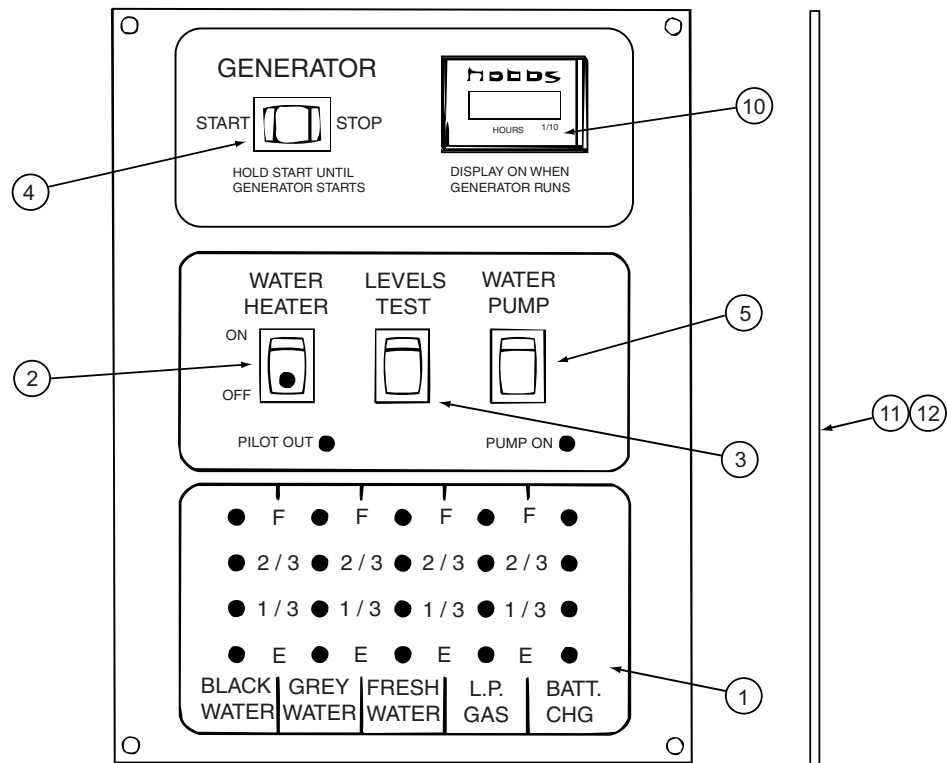


134940-06-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-702	EA	SWITCH - MOM/OFF/MOM/3 TERM	L0112-00
5	096983-01-703	EA	SWITCH - ON/ON	L0115-00
10	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)	L0775-00
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

134940-07-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-703	EA	SWITCH - ON/ON	L0115-00
5	134940-02-700	EA	SWITCH - DUMMY	L0118
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

134940-08-01A				
KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-04-700	EA	CHASSIS - SILKSCREENED	CE0136-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-702	EA	SWITCH - MOM/OFF/MOM/3 TERM	L0112-00
5	096983-01-703	EA	SWITCH - ON/ON	L0115-00
10	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)	L0775-00
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
12	134940-04-701	EA	BOARD - PC - SOLAR LIGHT	L5121-01
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

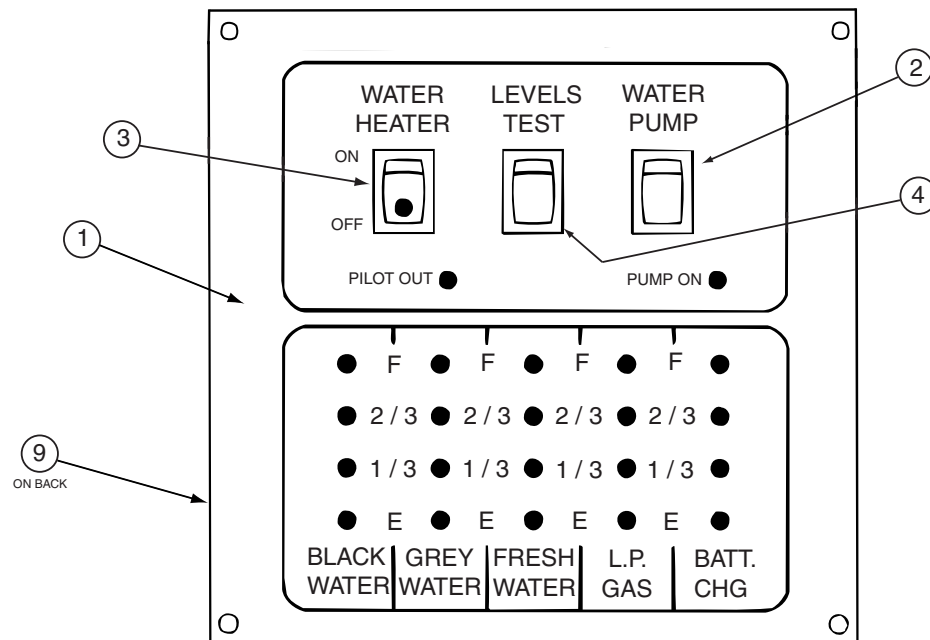

134940-10-01A				
KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-10-700	EA	SILKSCREENED CHASSIS	CE0129-00
2	096983-01-703	EA	SWITCH - ON/ON	L0115-00
3	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
4	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
9	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

137135-05-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	120233-01-714	EA CLIP-E	5160818
	120233-01-737	EA PLATE/INT-W/DIRECTIONAL HDLE	RK-CEIL
	120233-01-738	EA HDW PKG-HANDLE/SPRING/WASHER	RK-HAND
	120233-04-703	EA KIT-DIRECTIONAL HDL UPGRADE	RP-RM46
	137135-01-703	EA KIT ELEV-SHAFT/PLUG/SPRING	RP-4400
	137135-01-704	EA PIN - 1/4" X 3.25"	2160813
	137135-01-708	EA TURRET	3100728
	137135-01-710	EA PLATE - ROTATE LIMIT	3720052
	137135-01-712	EA BEARING - OUTER	2590347
	137135-01-713	EA TURRET BASE	3100730
	137135-01-714	EA GEAR - ELEVATING SHAFT	2200465
	137135-01-715	EA BEARING - INNER	2590348
	137135-01-717	EA BOLT - FLAT HEAD	2160362
	137135-01-719	EA BRACKET - PIVOT	2744945
	137135-01-722	EA CLAMP	2590343


KEY	PART NUMBER	U/M	DESCRIPTION	163097-01-000	VENDOR NO.
	163097-01-700	EA	KEY - #2382 (ILLINOIS LOCK)		2382
	163097-01-701	EA	KEY - #2341 (MILLER DIAL)		PART SALES

KEY	PART NUMBER	U/M	DESCRIPTION
	165170-01-700	EA	LENS

165170-01-01A
VENDOR NO.
81230-LENS

KEY	PART NUMBER	U/M	DESCRIPTION	170693-02-02A	VENDOR NO
	170693-02-700	EA	LENS-OPTIC		L8106

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	172120-01-700	EA	REMOTE - RADIO	REMJC

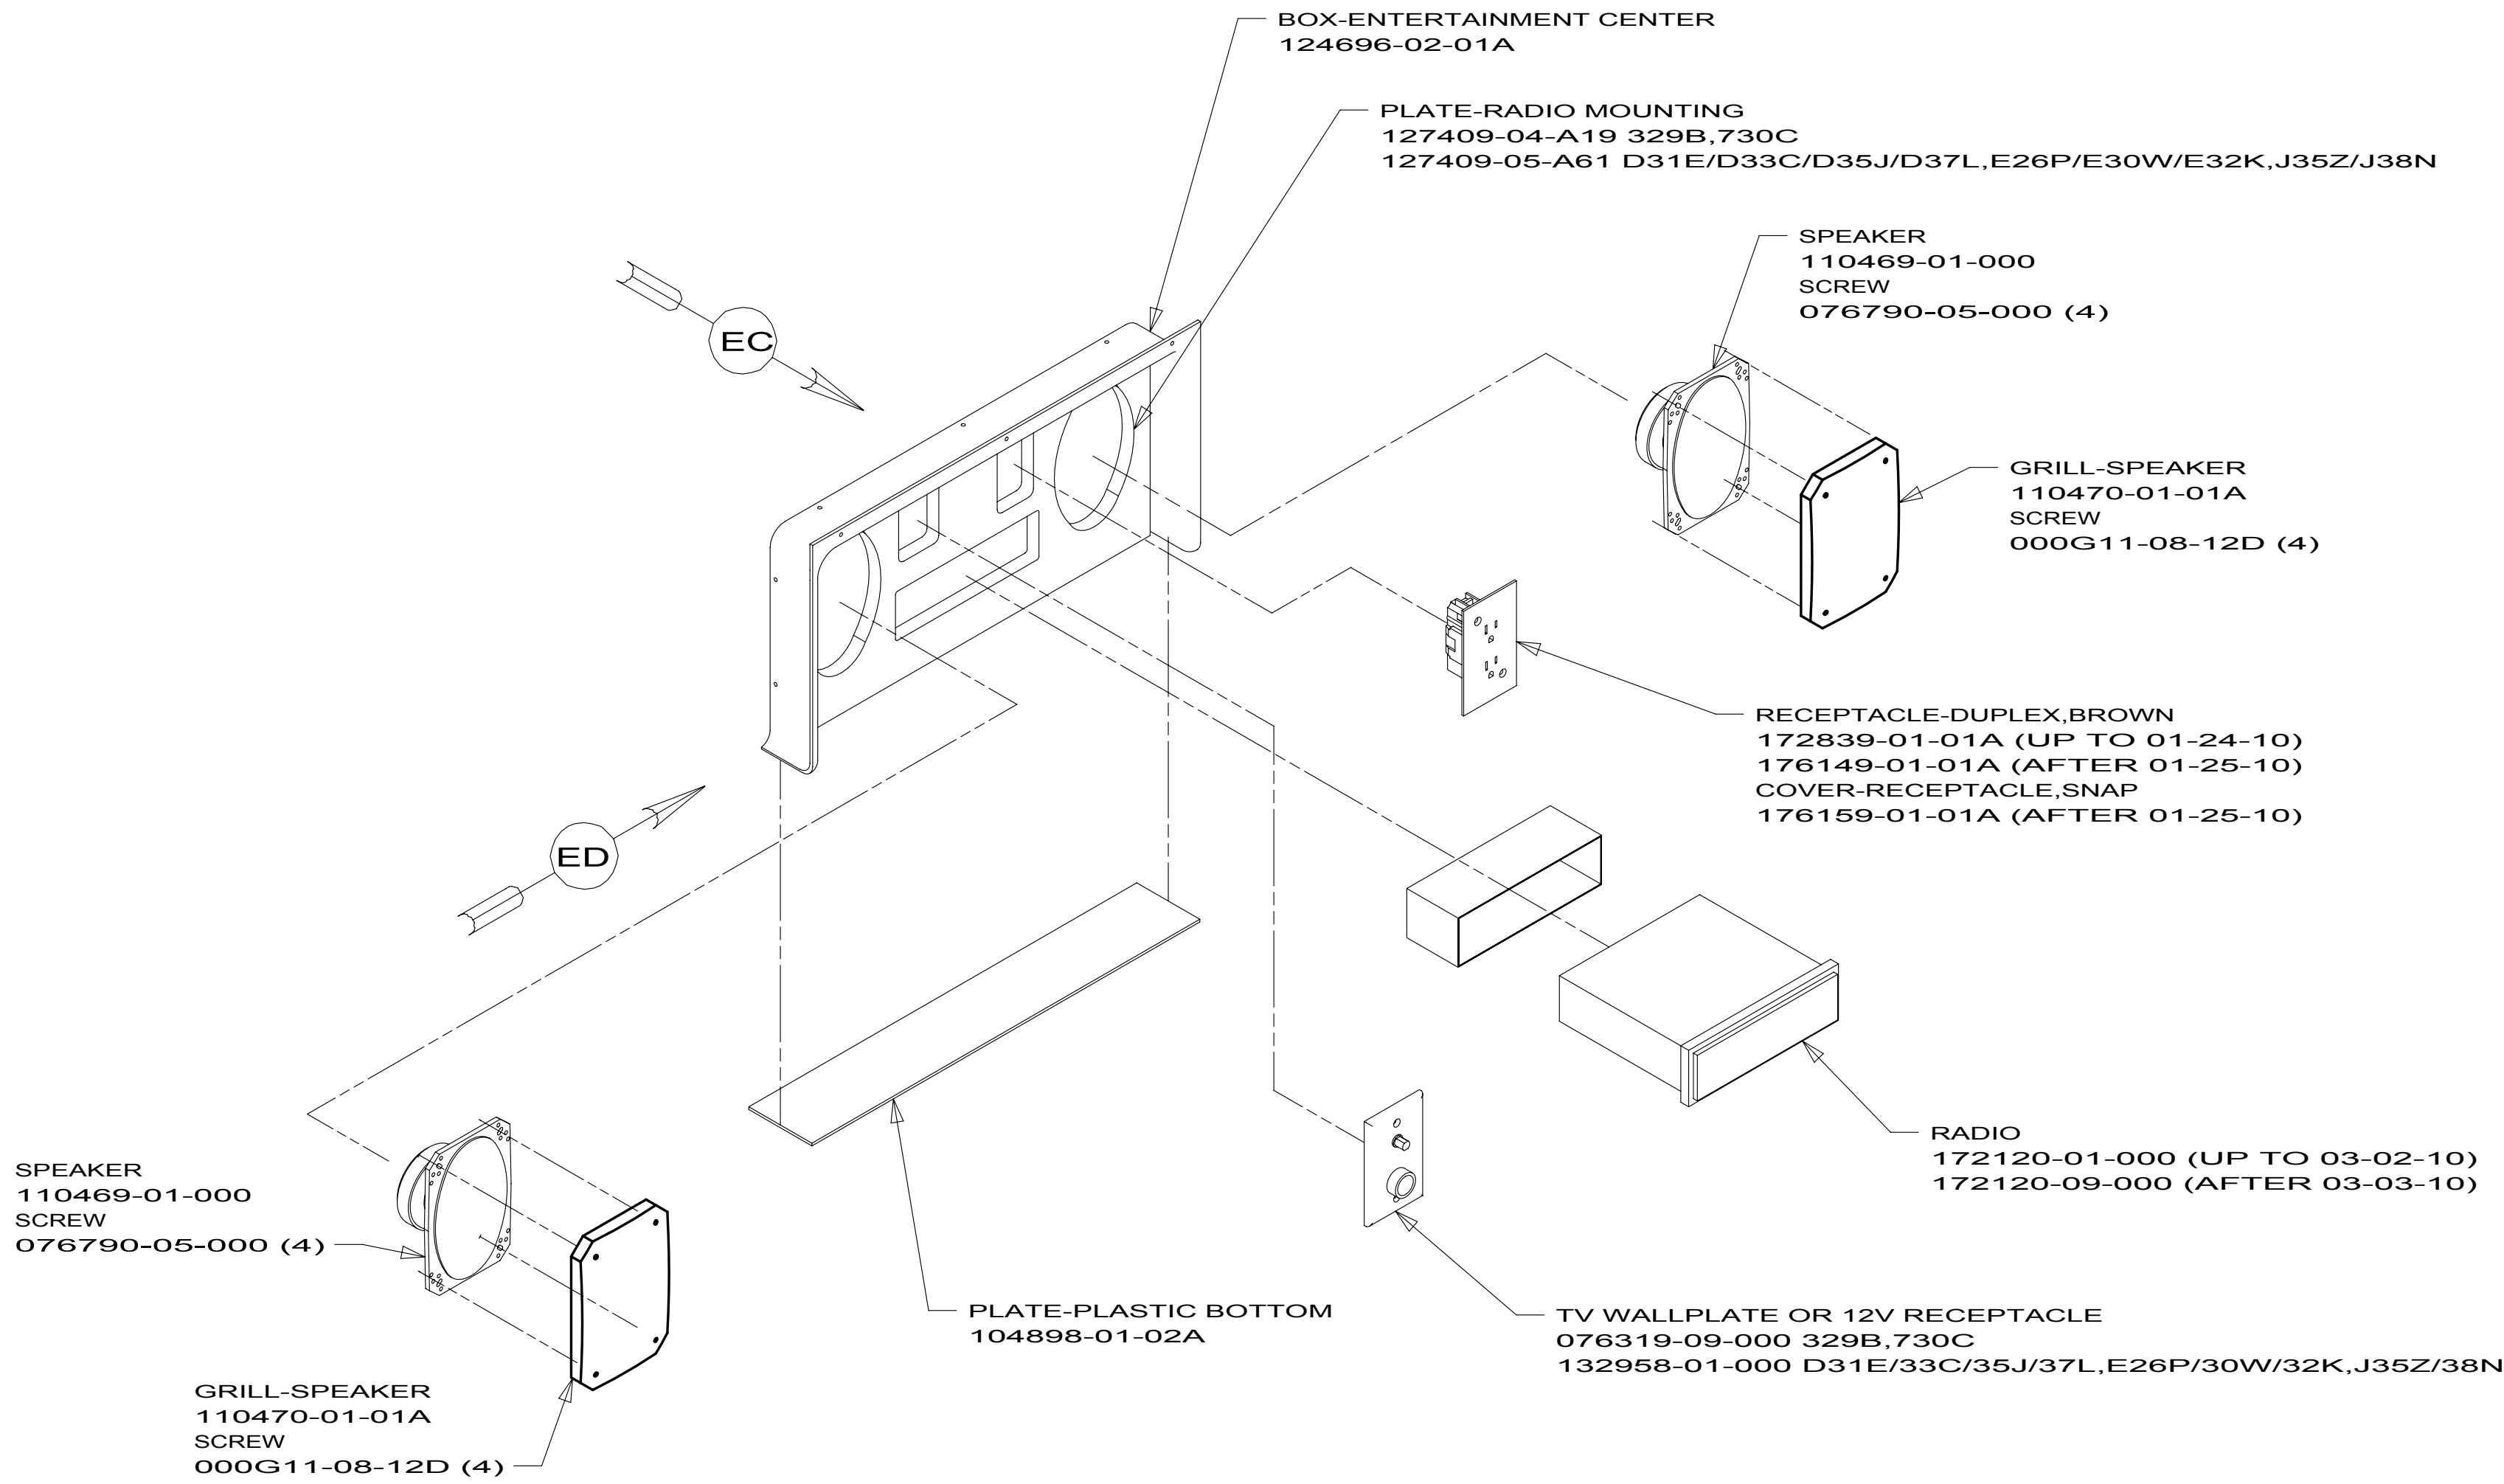

173464-03
329B
730C

173464-07
D31E
D33C
D35J
D37L
E26P
E30W
E32K
J35Z
J38N

1. SEE WIRING INSTL-BODY FOR ADDITIONAL INFORMATION.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


1D5 ENTERTAINMENT CENTER/EXT W/CD

10 MOTORHOMES

ENTERTAINMENT CENTER COMPL

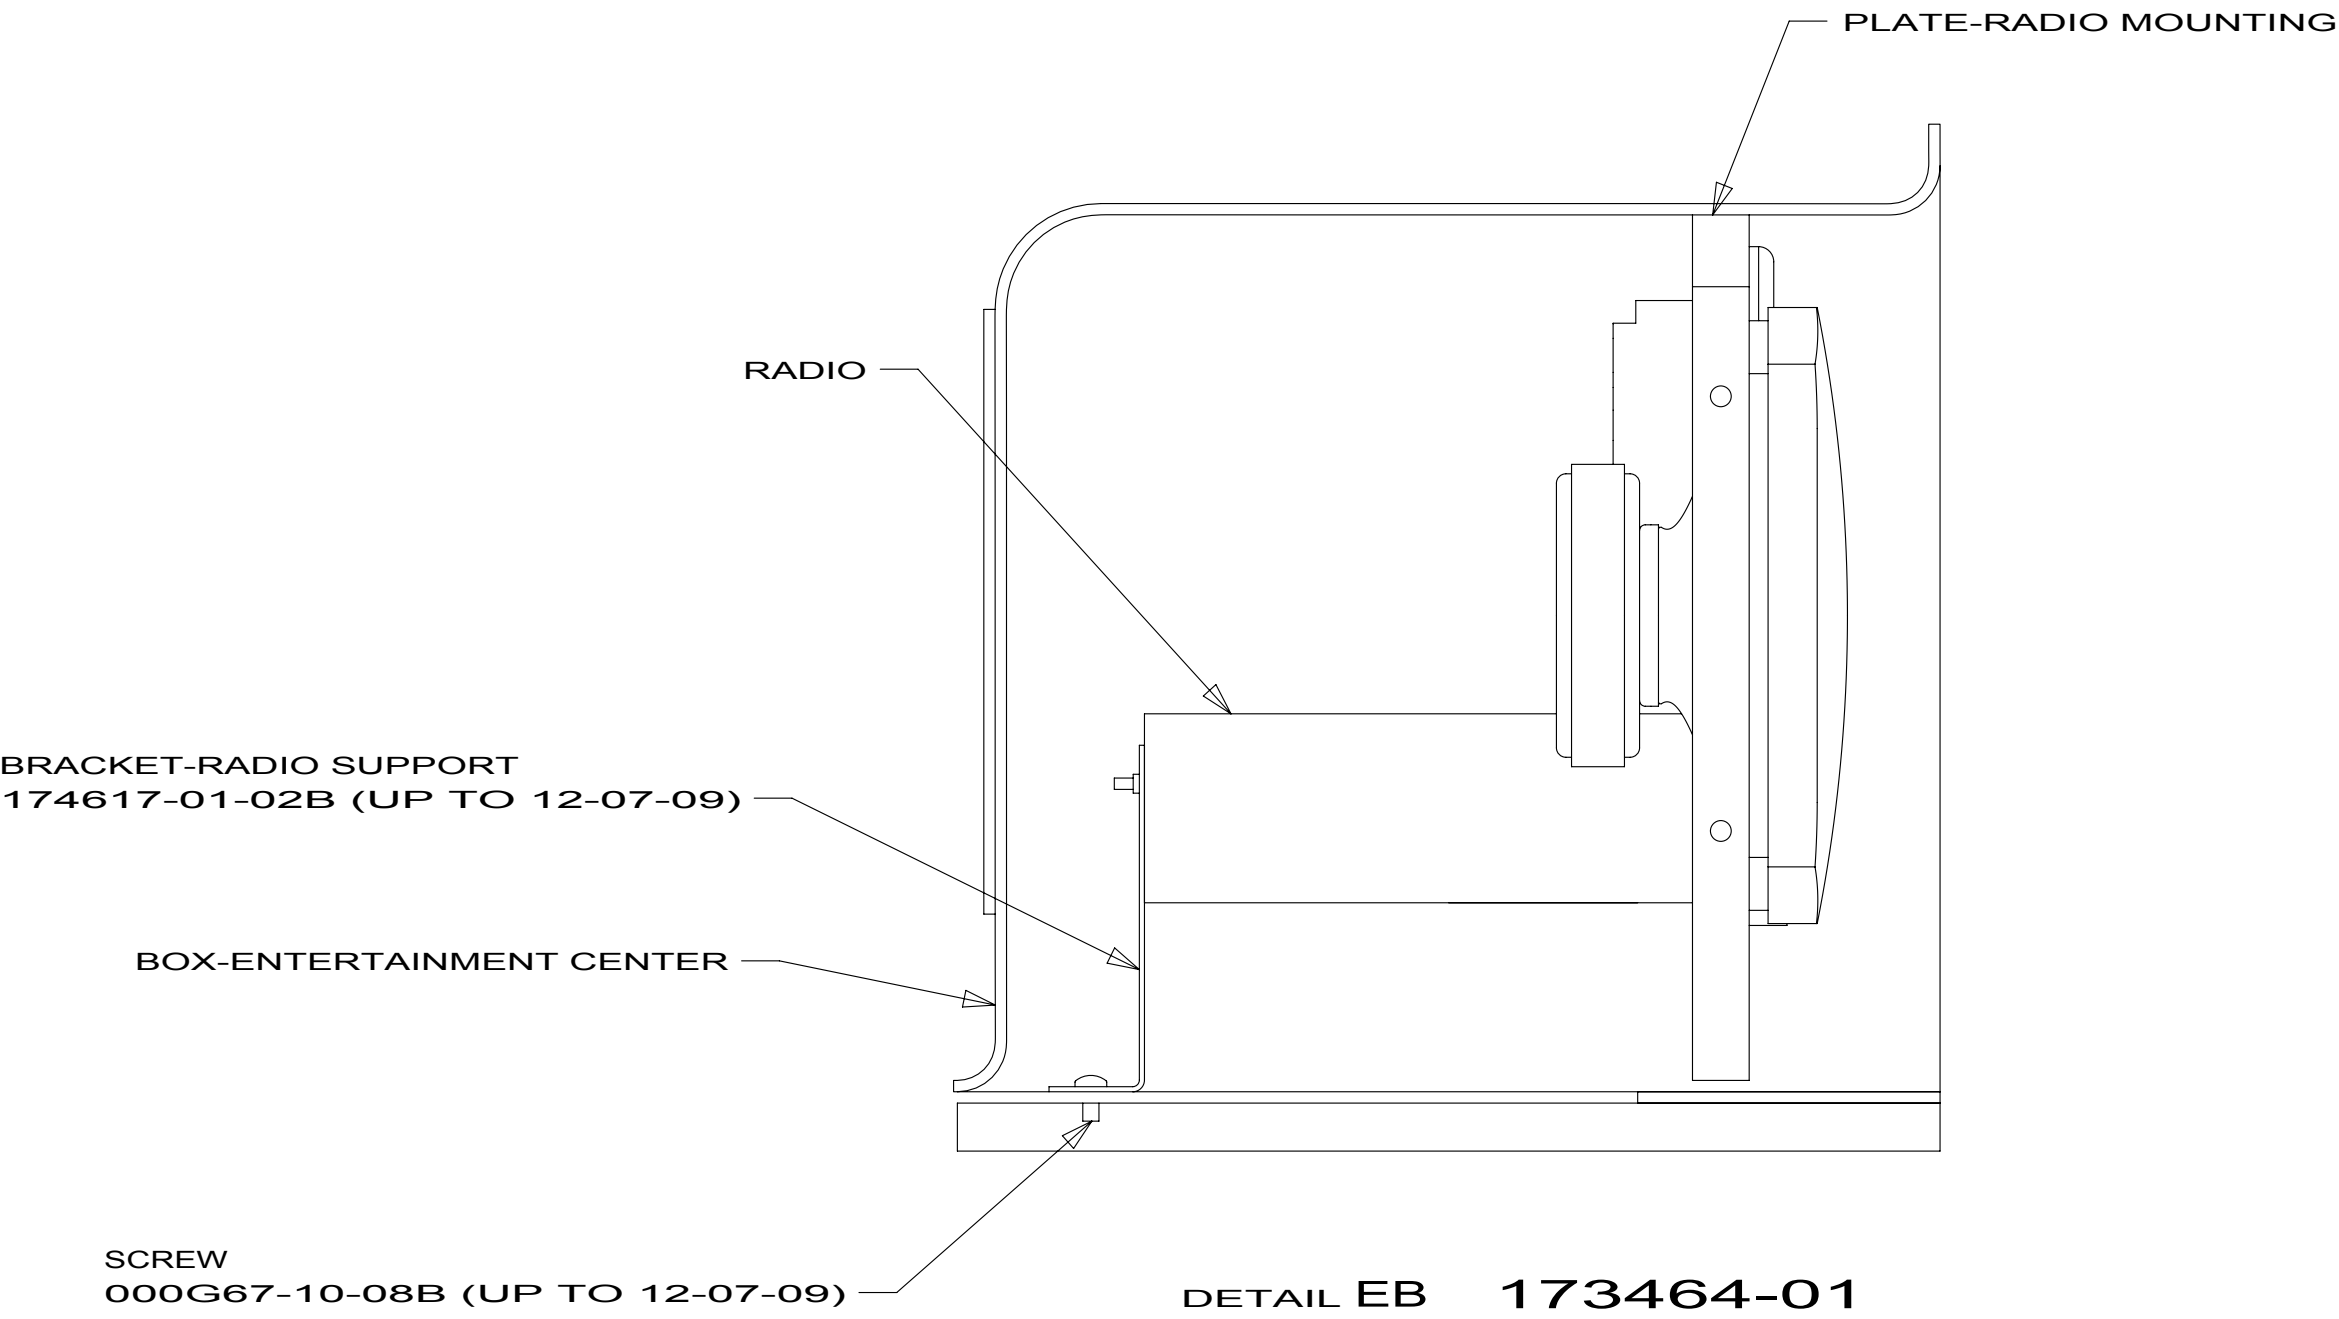


DETAIL EB 173464-01

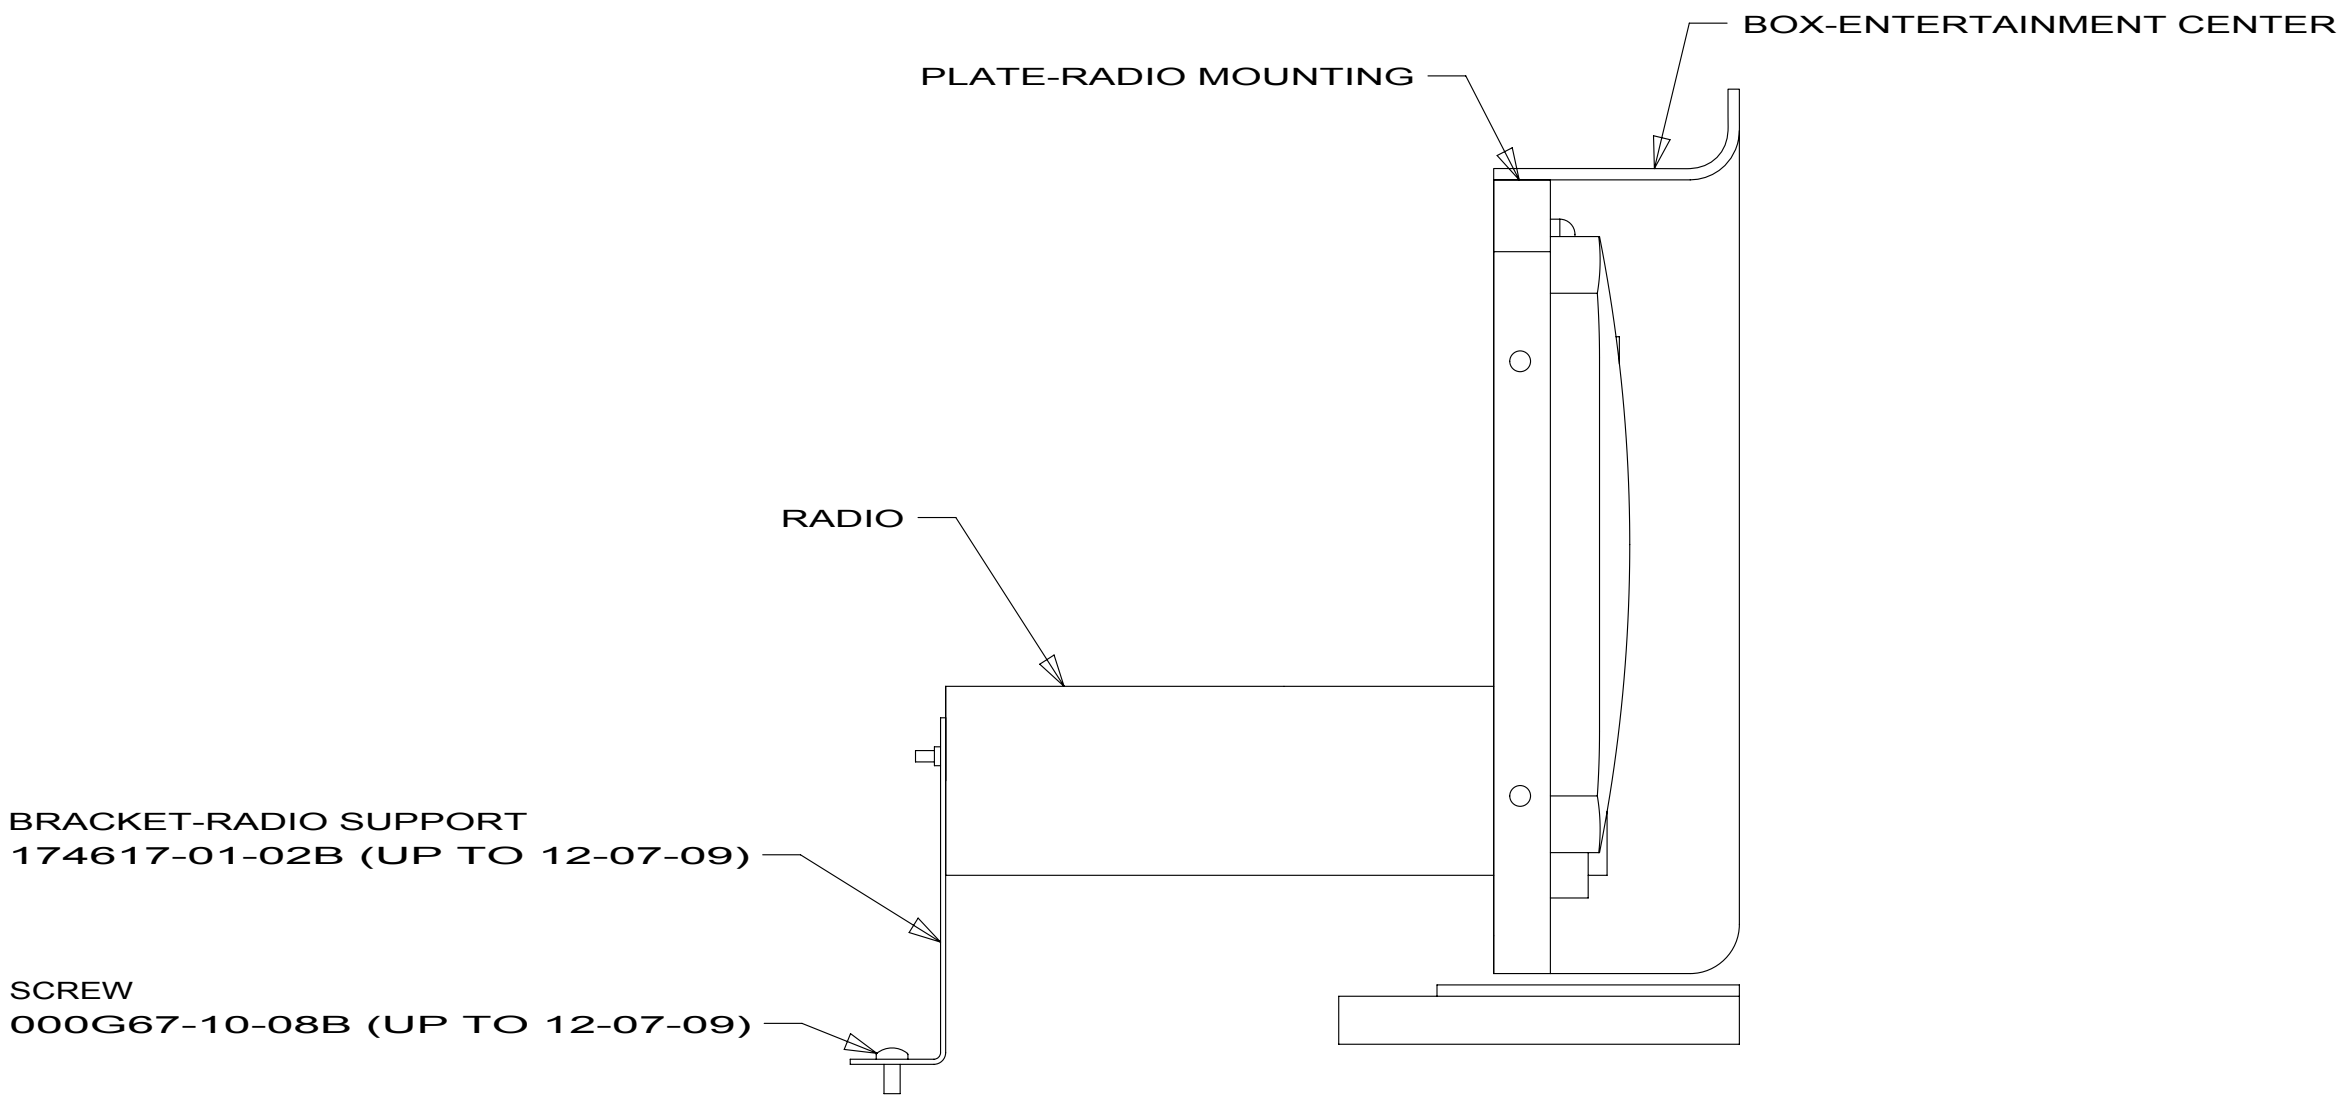


DETAIL ED 173464-03
173464-07
173464-08

173464-01
173464-03
173464-07
173464-08

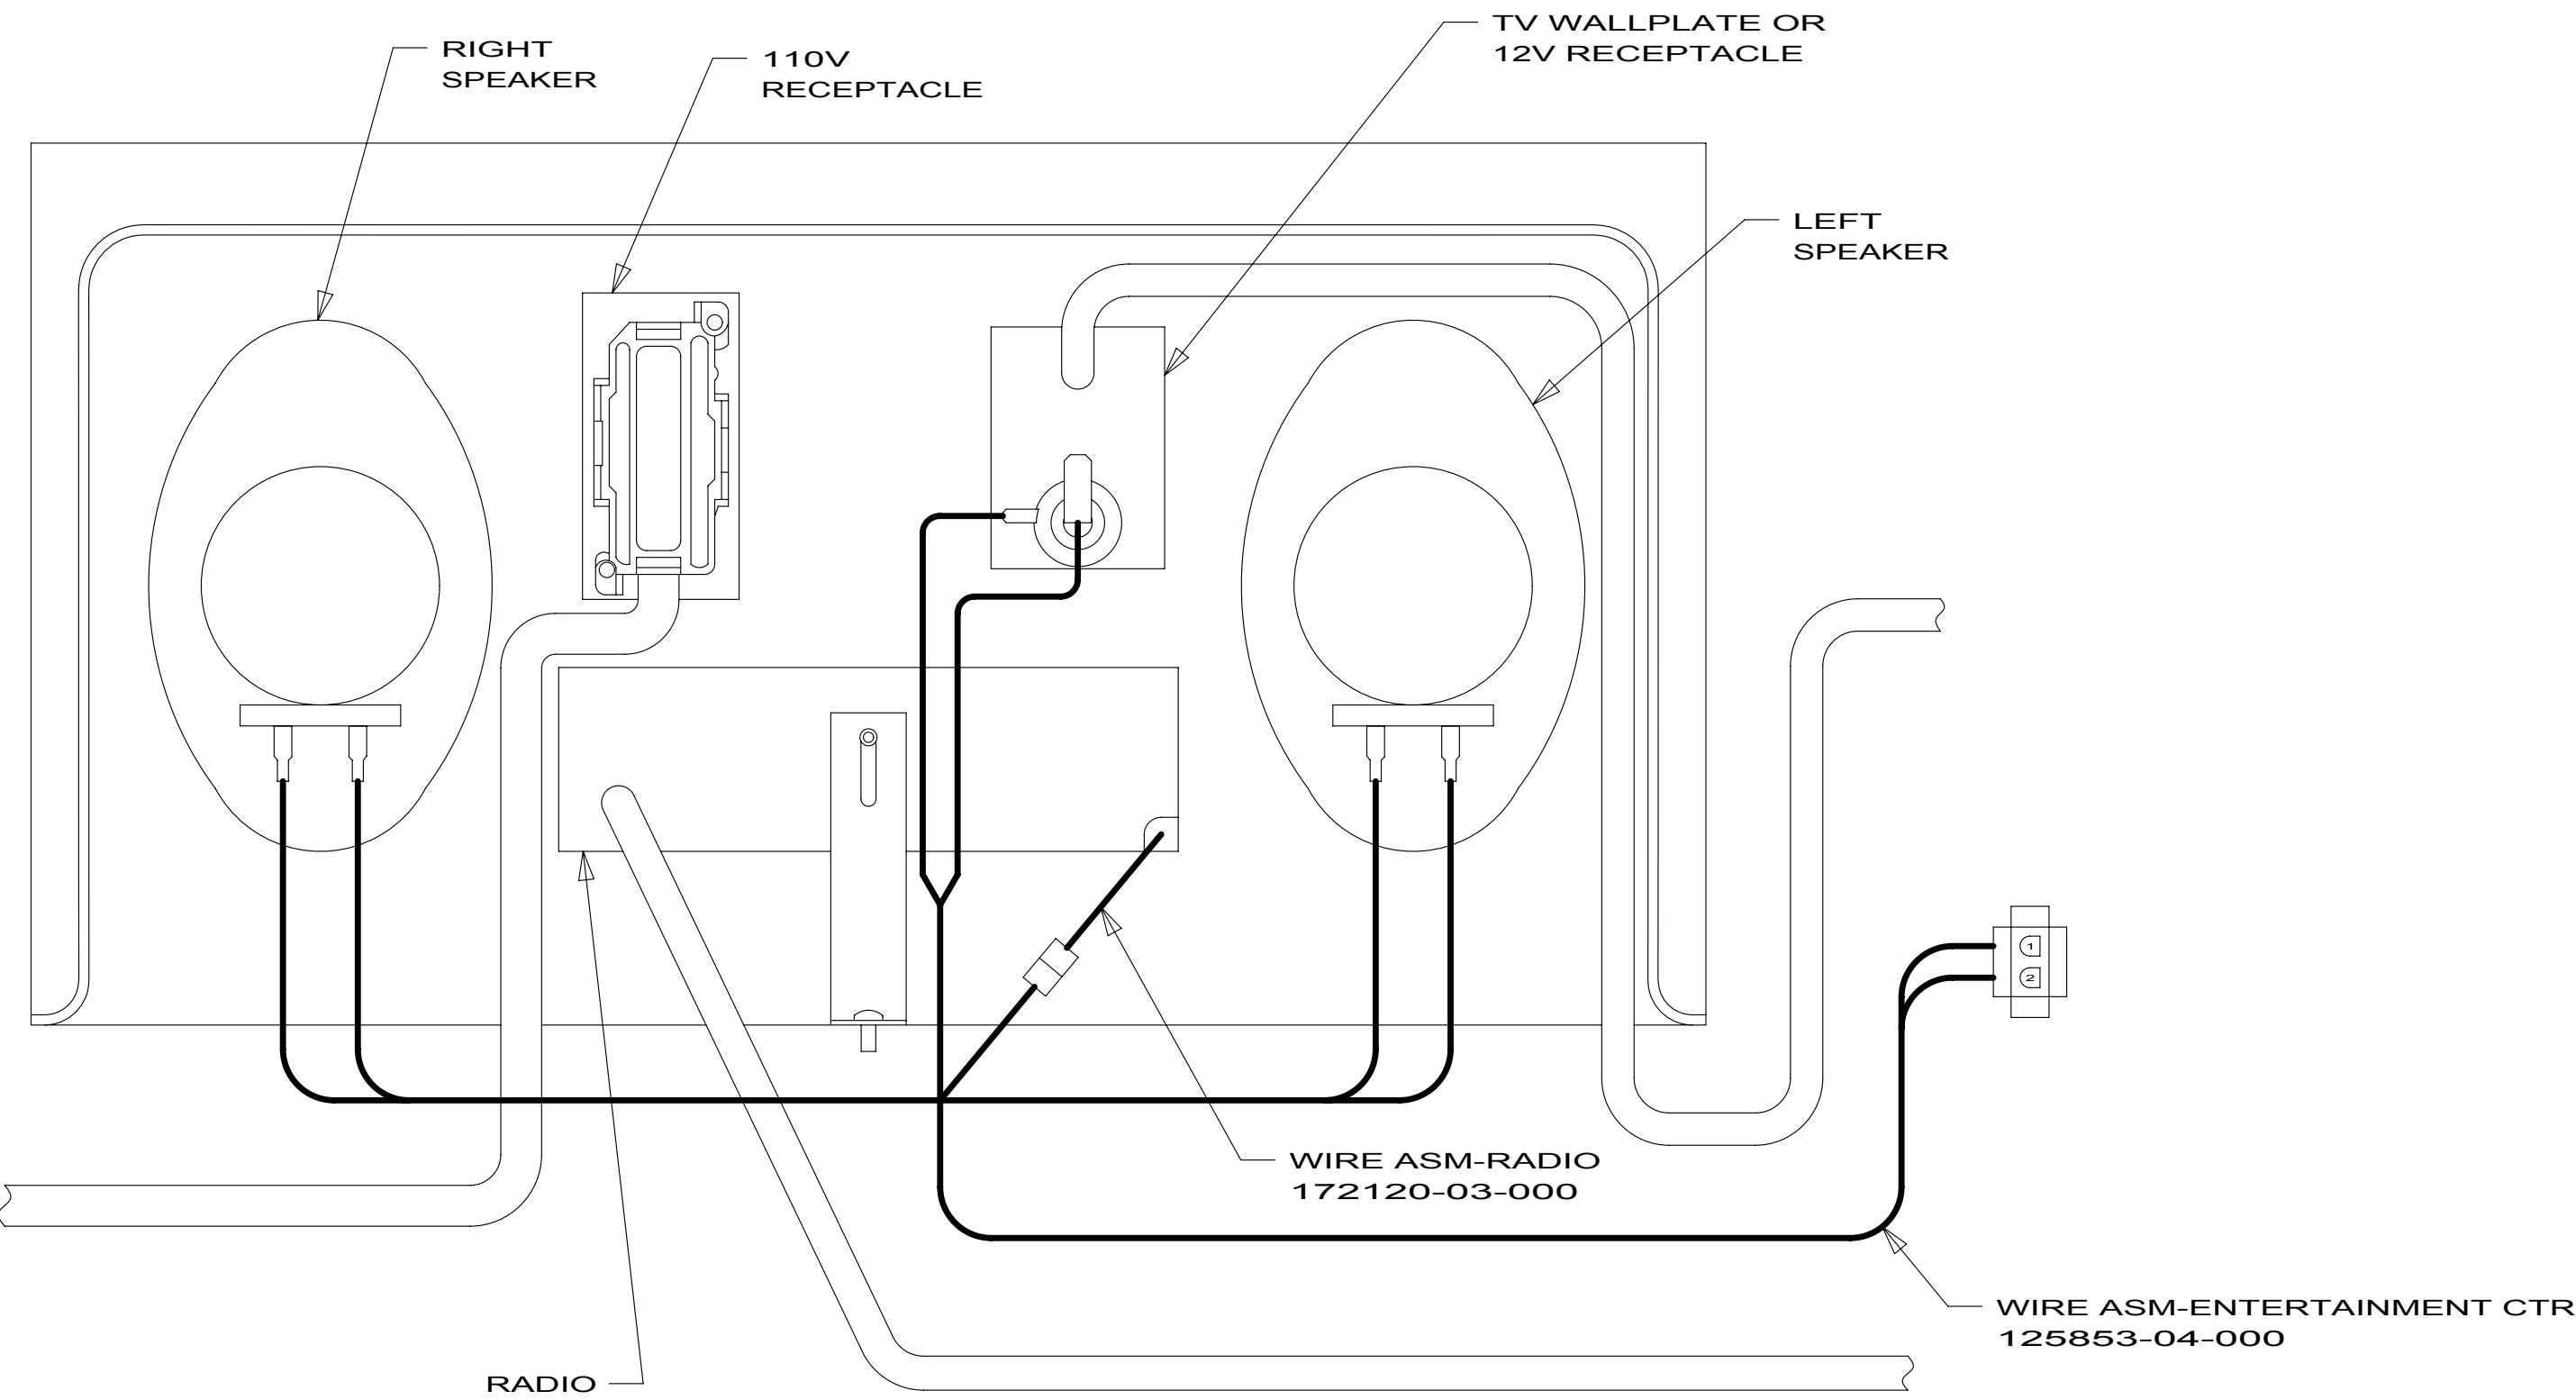

DETAIL EA 173464-01

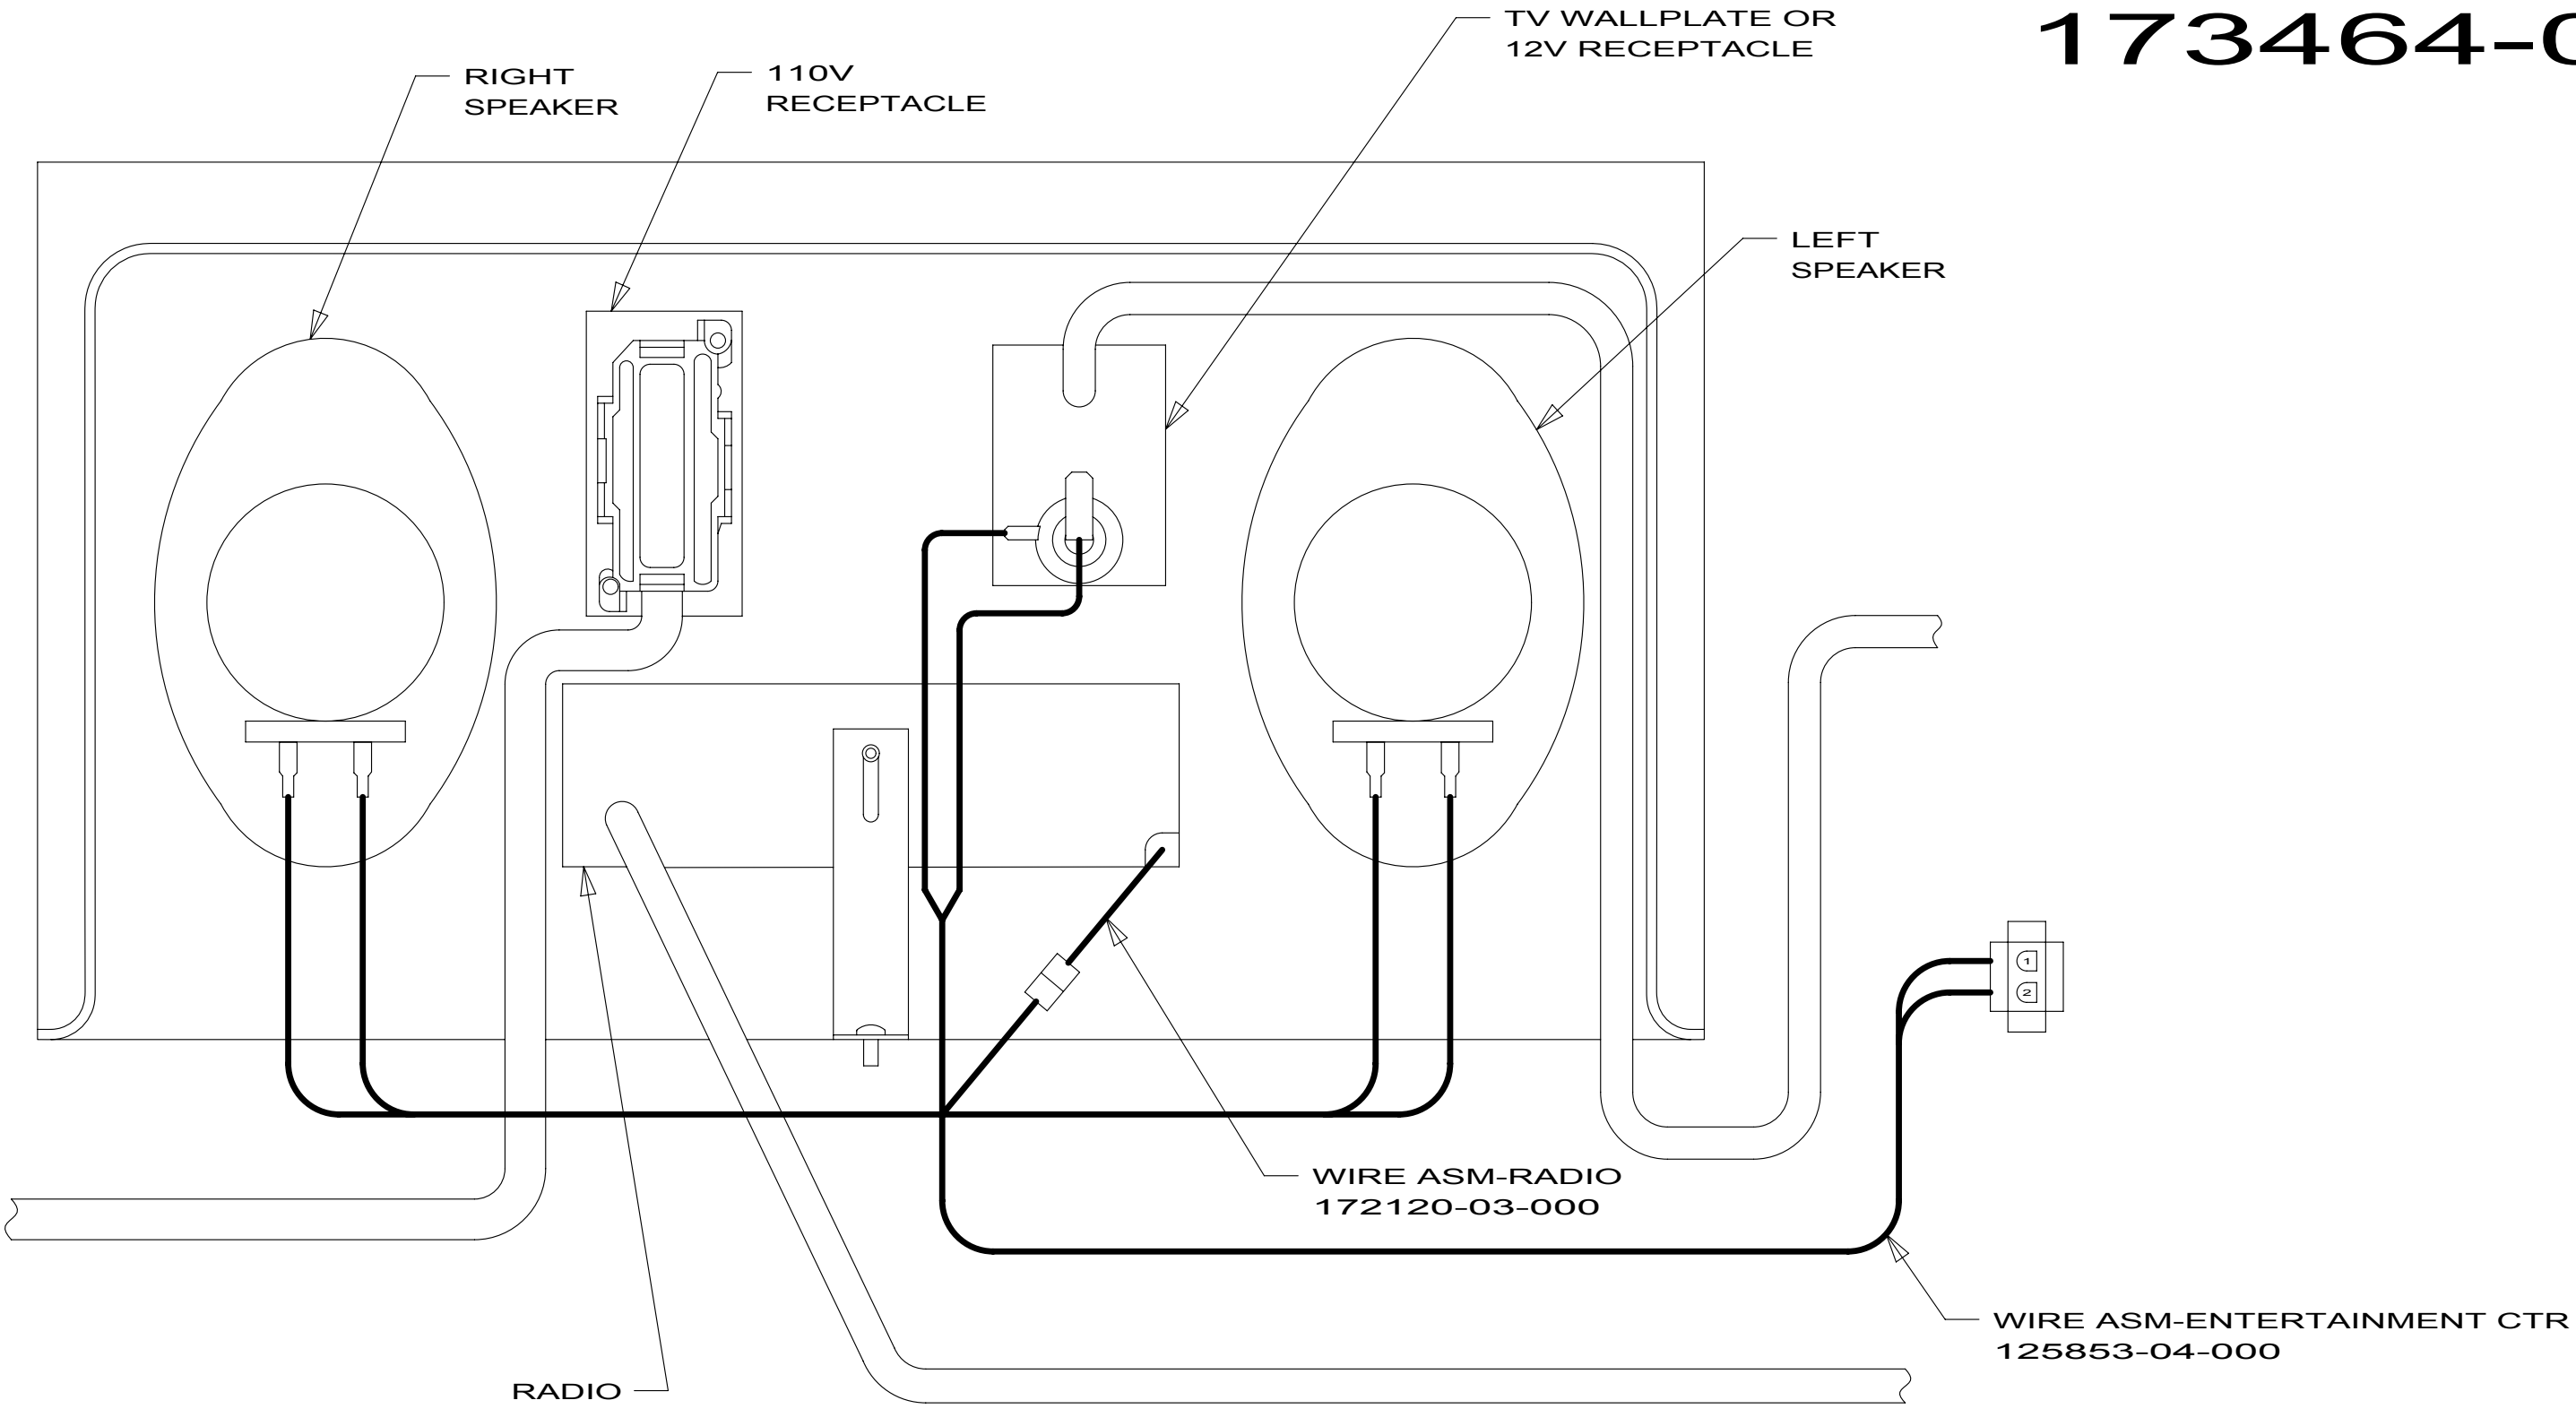

DETAIL EC 173464-03
173464-07
173464-08

1D5 ENTERTAINMENT CENTER/EXT W/CD

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

10 MOTORHOMES

ENTERTAINMENT CENTER COMPL

D-Series
E-Series
J-Series
169848-05

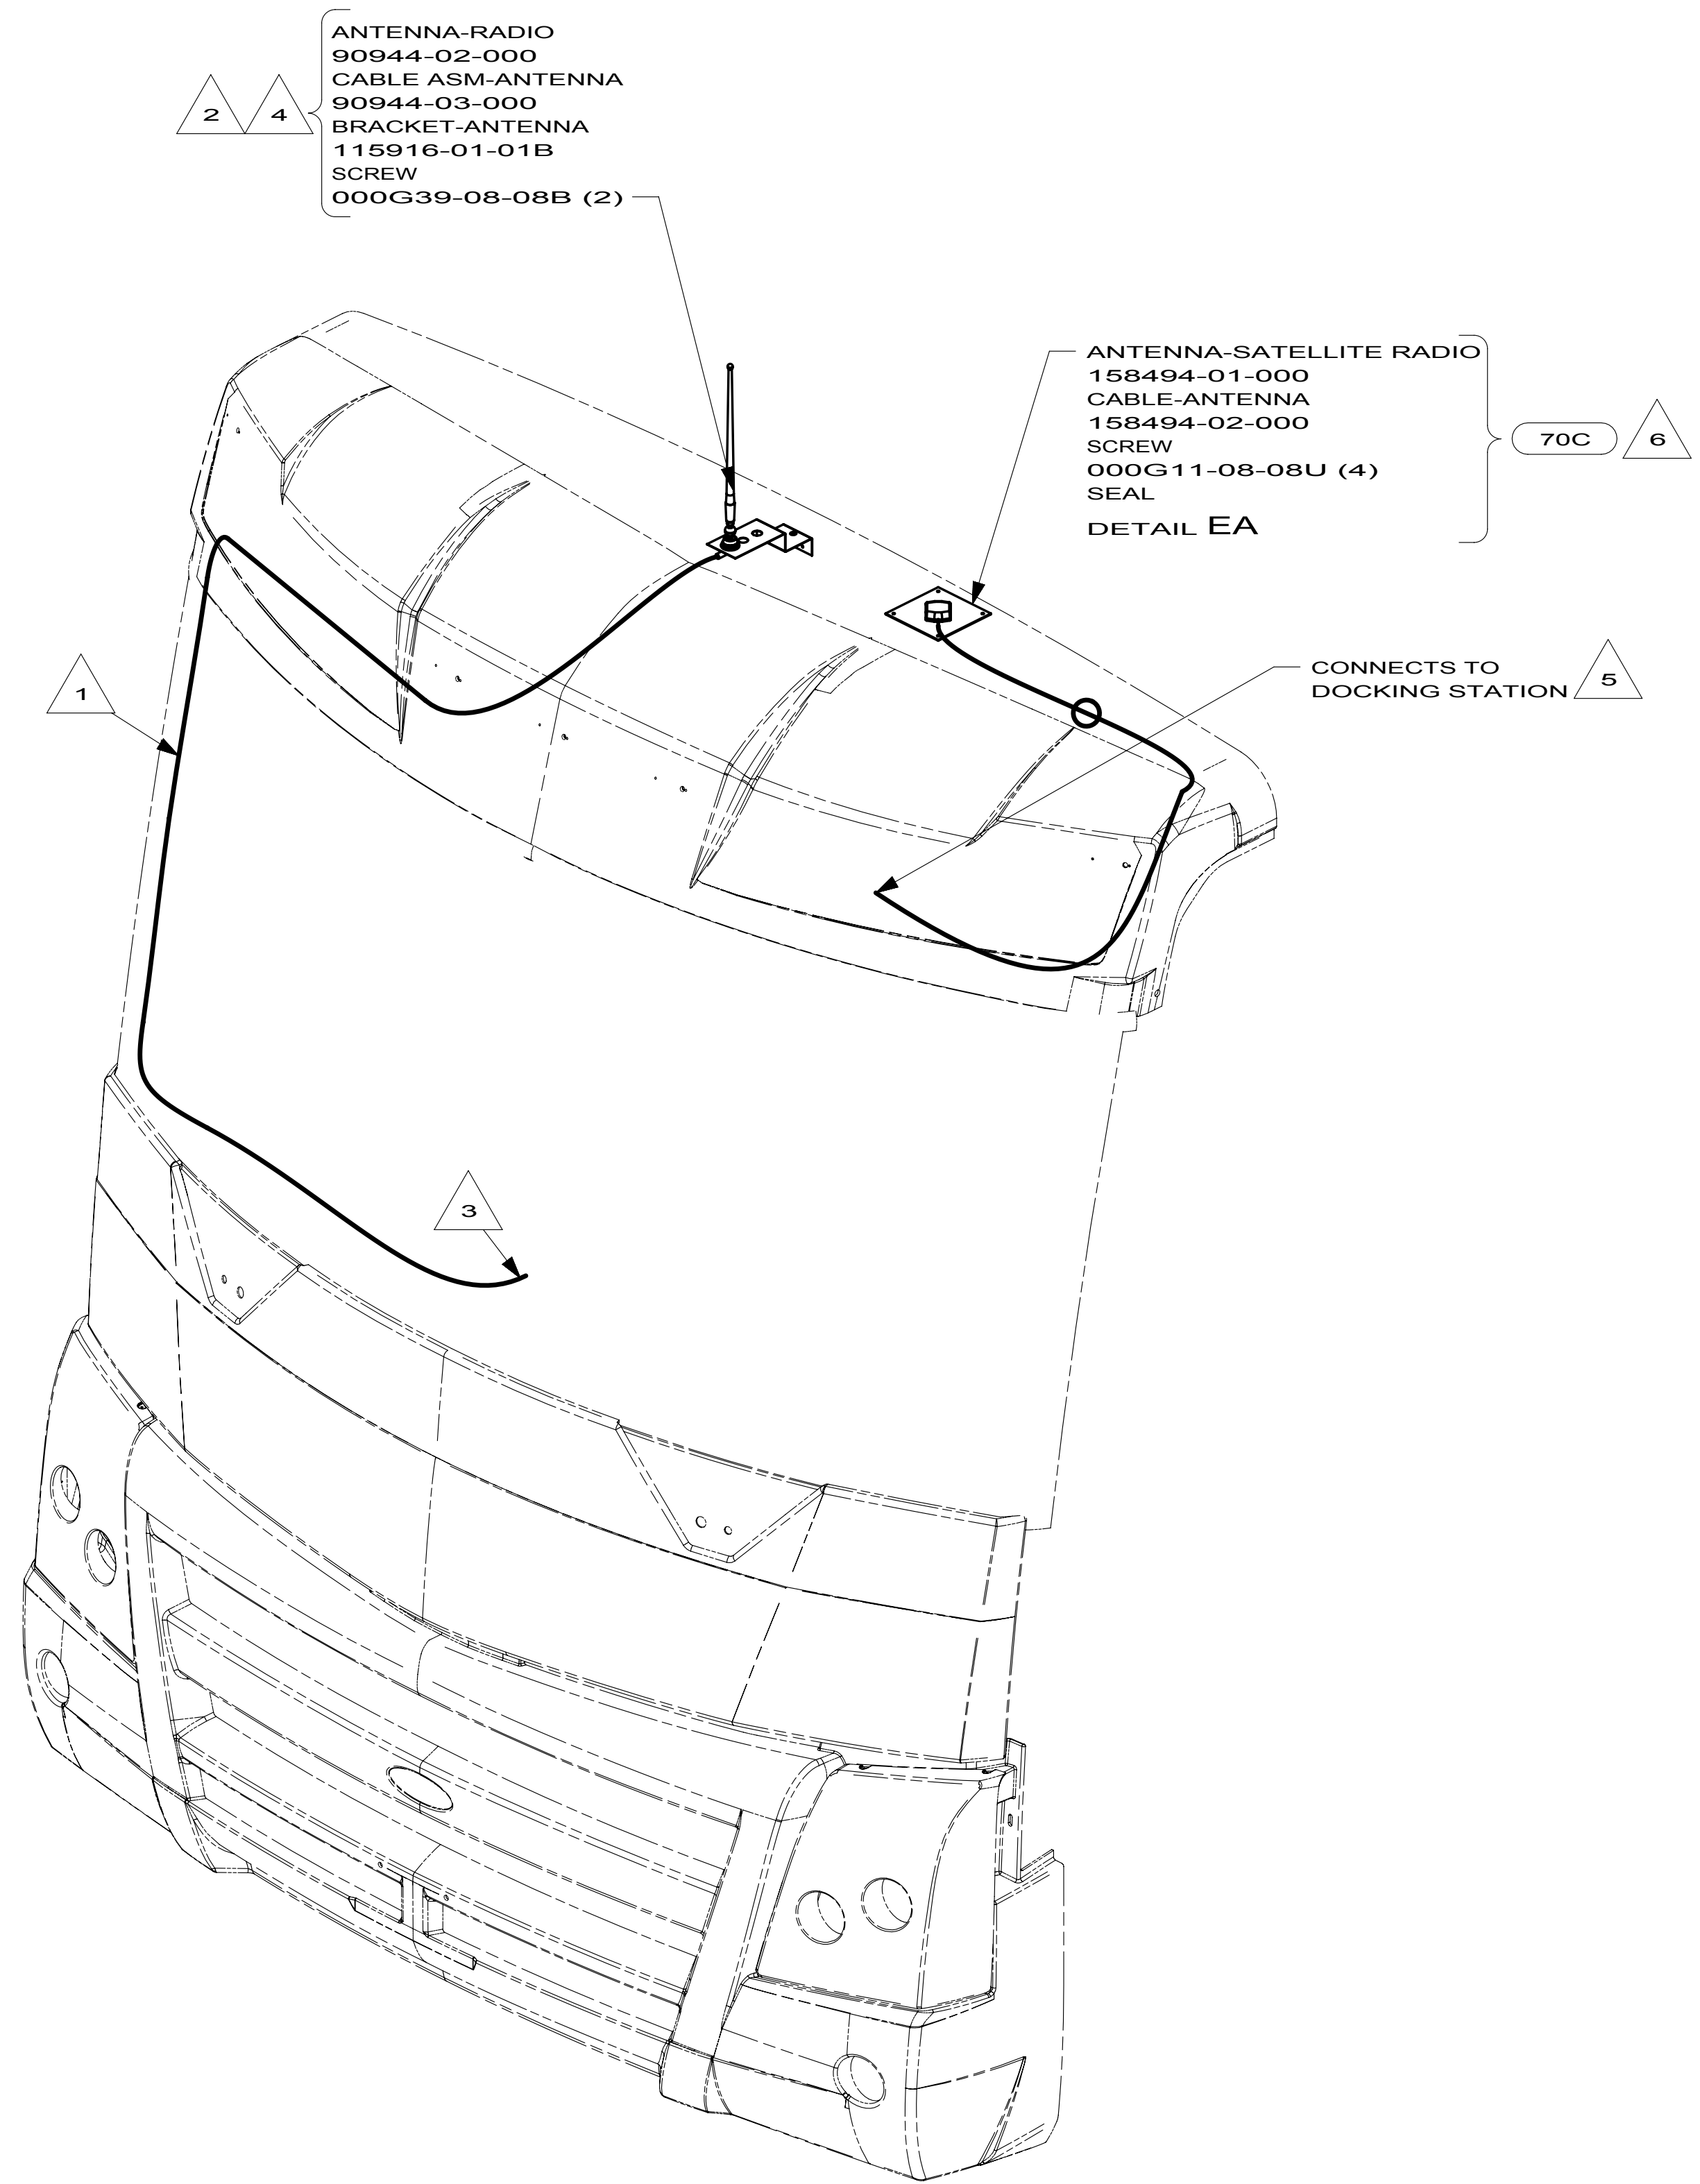

- 6 MOUNT ANTENNA SUCH THAT BASE IS SQUARE W/REAR OF ROOF CAP & HOLE IS DIRECTLY OVER HOLE IN FIBERGLASS. SEAL HOLE IN ROOF CAP, BASE AT SCREWS.
- 5 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 4 USE HOLE IN BRACKET AS GUIDE TO DRILL 13 DIAMETER HOLE IN FIBERGLASS.
- 3 TO RADIO.
- 2 SEAL AROUND ANTENNA BASE.
- 1 ROUTE CABLE ALONG A-POST, UNDER TRIM COVER.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


- 70C RADIO - SATELLITE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ANTENNA INSTL-RADIO AND CB		
SHEET 5	PART NO 169848	REV

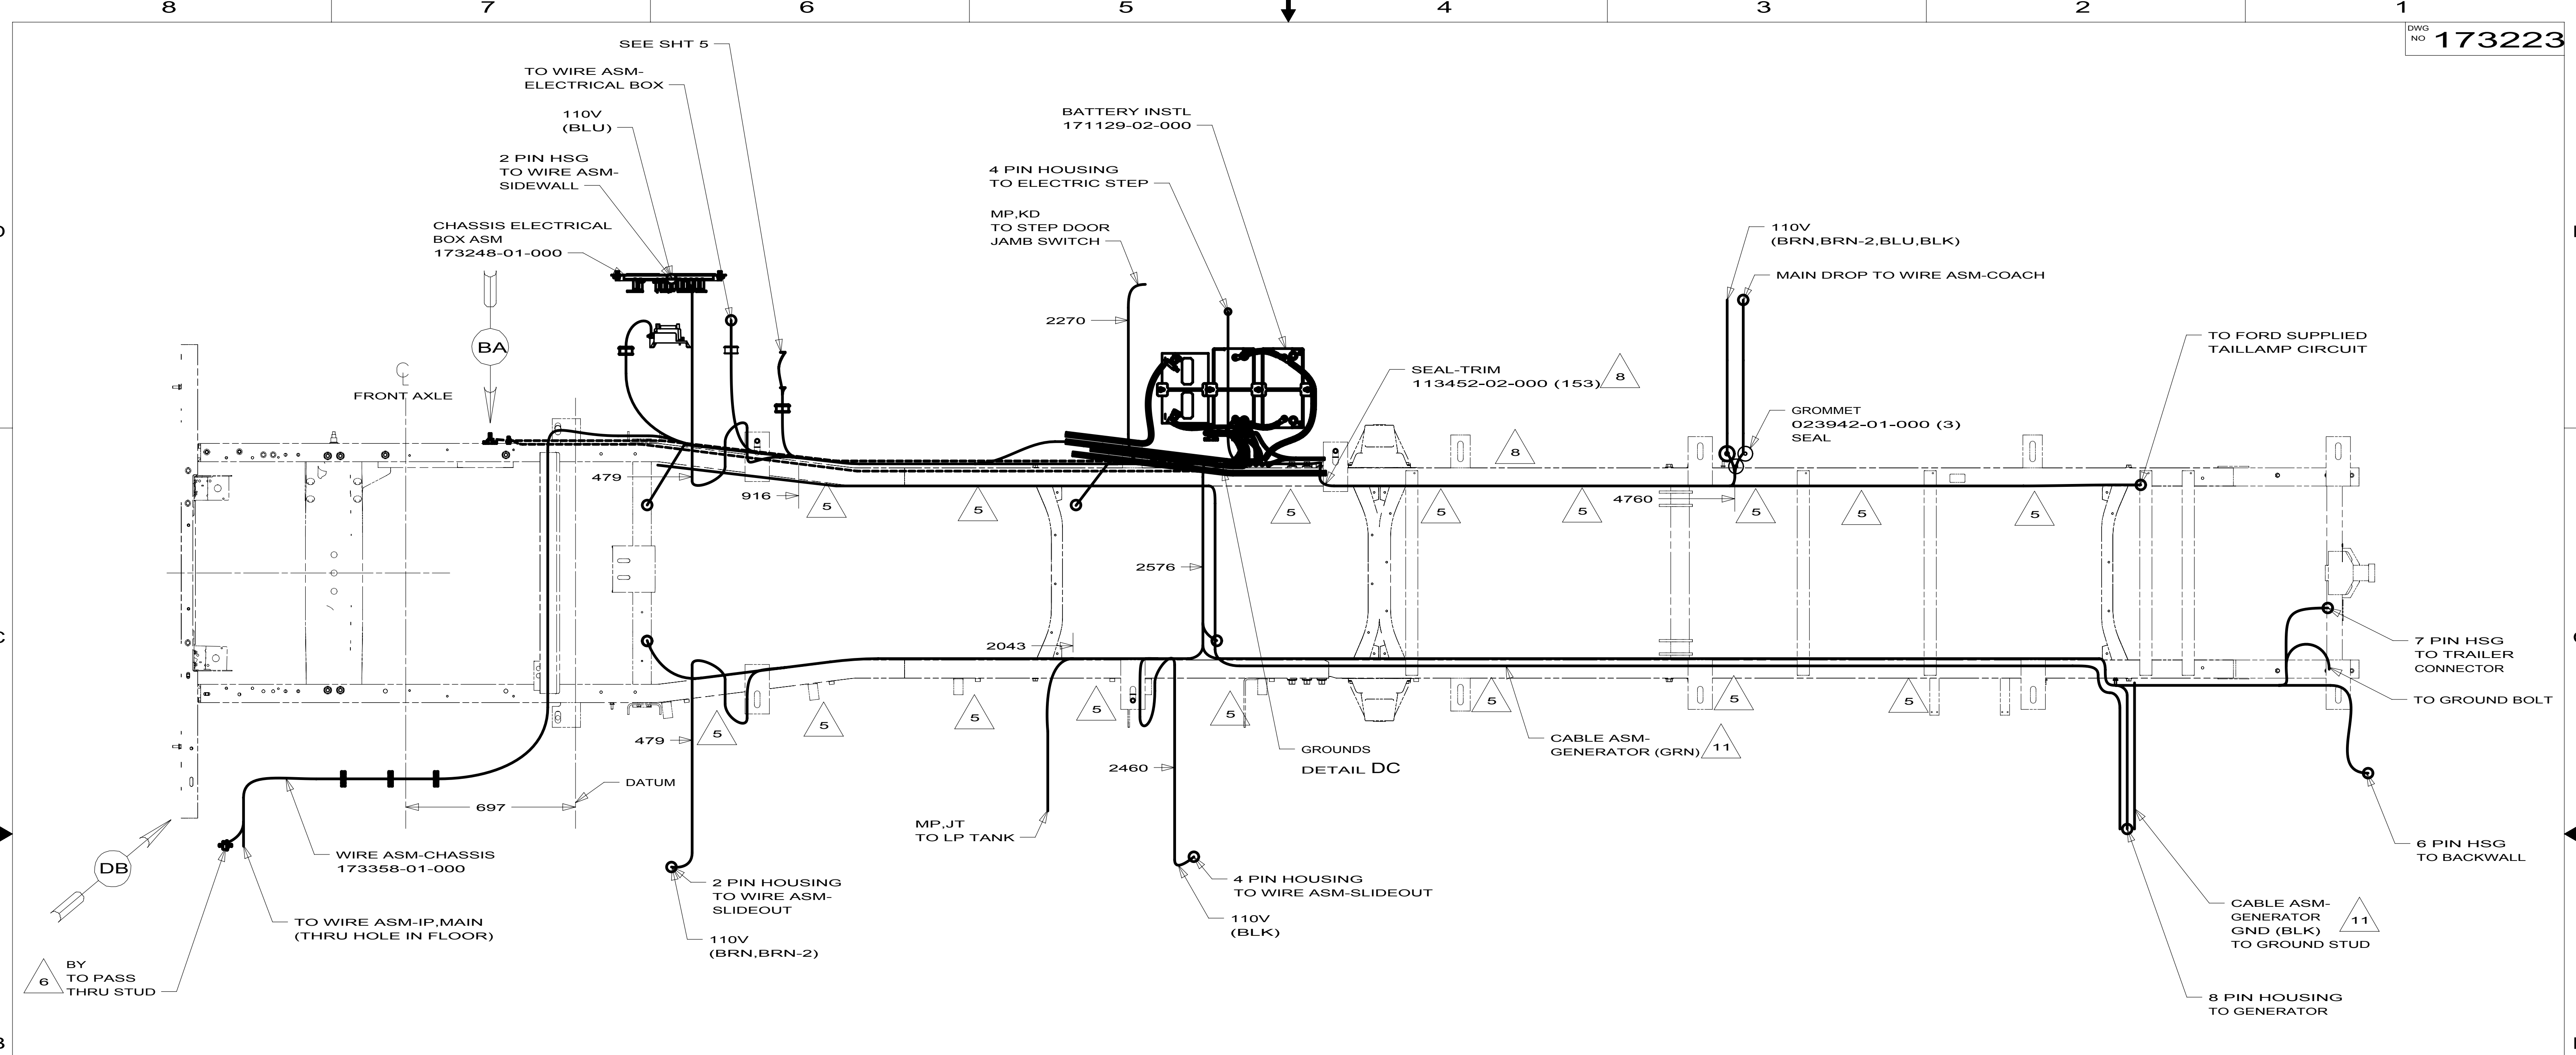

173223-02

- 11 SEE BATTERY INSTALLATION FOR ADDITIONAL INFORMATION.
- 10 SUPPLIED WITH CHASSIS
- 9 CUT CHASSIS SUPPLIED BATTERY CABLE 700MM FROM BATTERY TERMINAL AND ADD TERMINAL 008348-01-000 TO CUT END.
- 8 COVER SHARP EDGES WHERE WIRE CROSSES FRAME RAILS.
- 7 CUT CHASSIS SUPPLIED POSITIVE BATTERY CABLE 150MM FROM BATTERY TERMINAL END. DISCARD TERMINAL END AND ADD TERMINAL 113738-01-000 TO CUT END. COIL EXCESS ALONG FRAME RAIL JUST BEHIND THE RADIATOR AND TIE UP WITH WIRE-TIE 008343-04-000.
- 6 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 5 CLAMP 083610-01-000, SCREW 000G11-10-16B.
- 4 WIRE TIE 008343-04-000. FASTEN EVERY 600MM MINIMUM.

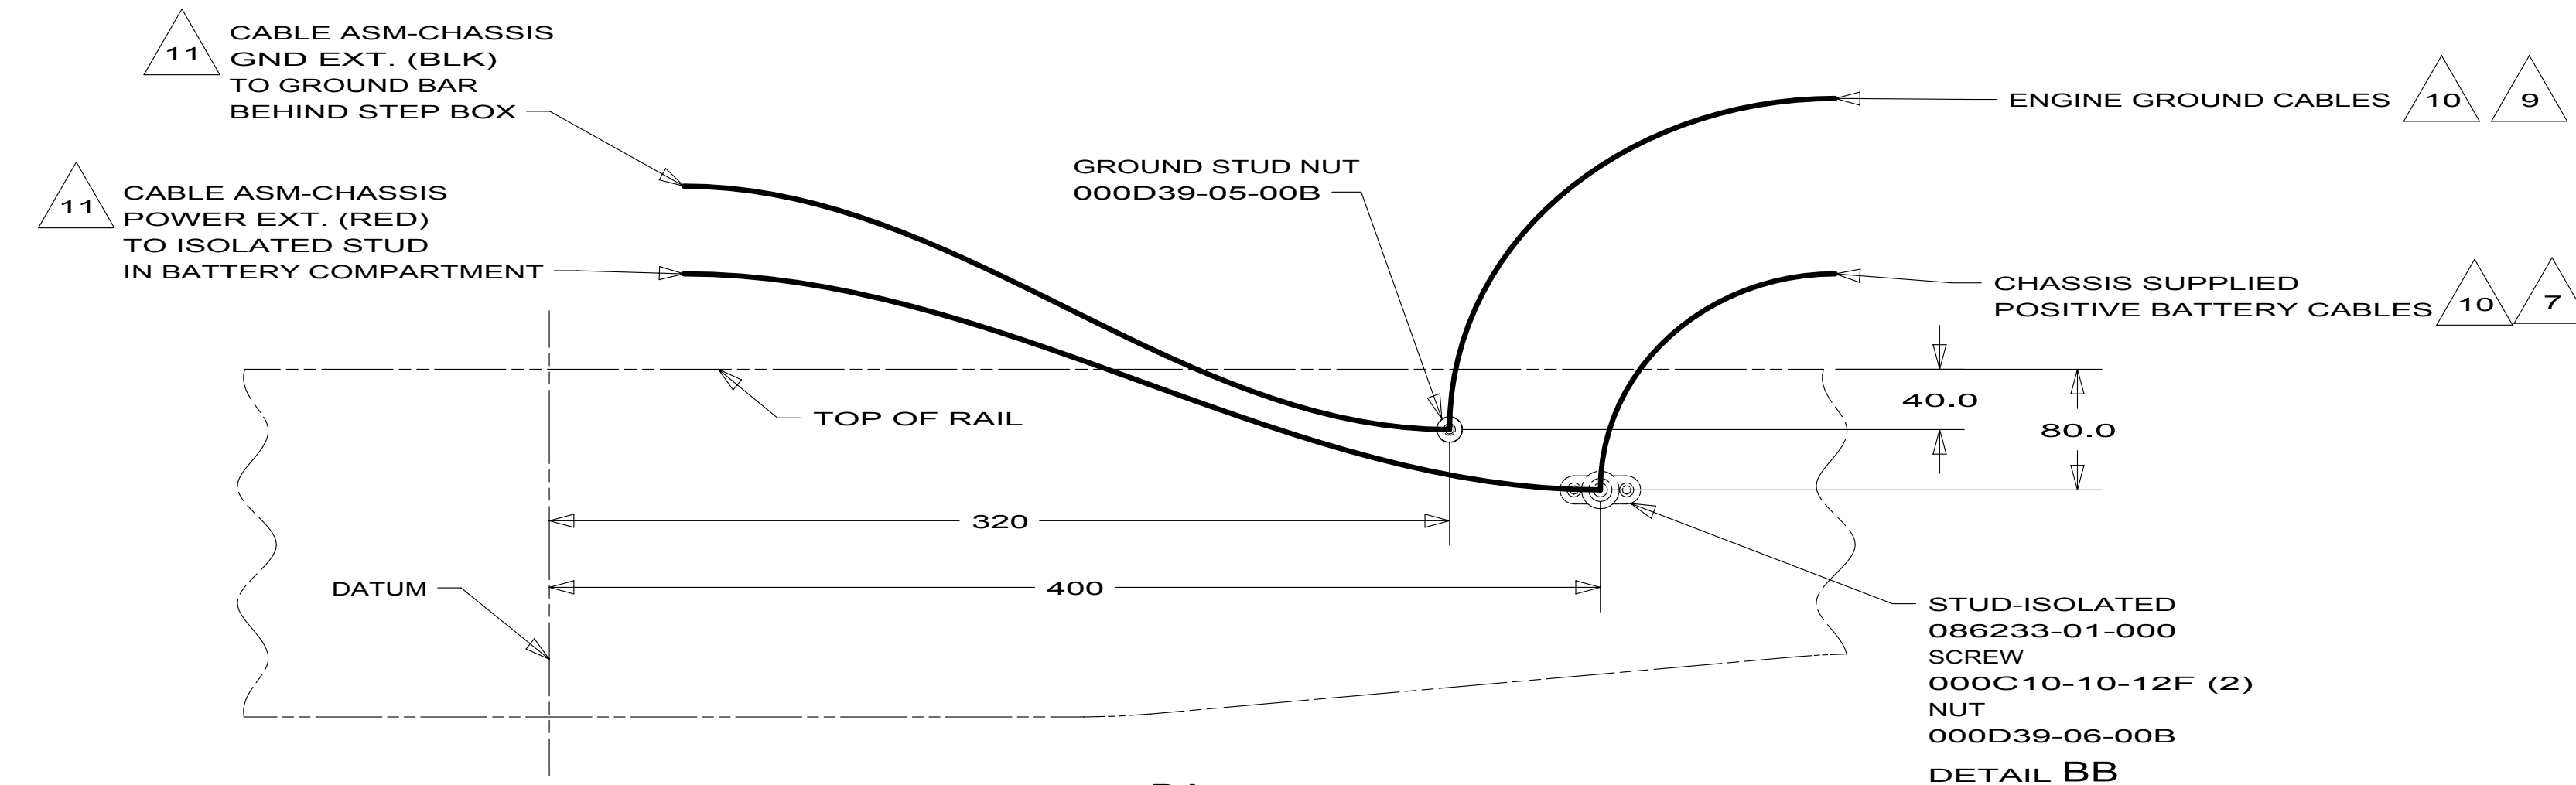

- 3. ALL DIMENSIONS ARE FROM DATUM UNLESS OTHERWISE SPECIFIED.
- 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
- 1. LEGEND: — WINNEBAGO — CABLE: — CHASSIS SUPPLIED WIRING.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

60M	HYDRAULIC LEVEL JACKS-AUTO	
16H	FORD CHASSIS 18,000#/V10 ENG	
265	CODES/STANDARDS-CSA/CMVSS	
1B1	CODES/STANDARDS USA	
1B1	265	16H
FIRST USED		
10 E30W		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-CHASSIS		
SHEET 1	PART NO	REV
	173223	

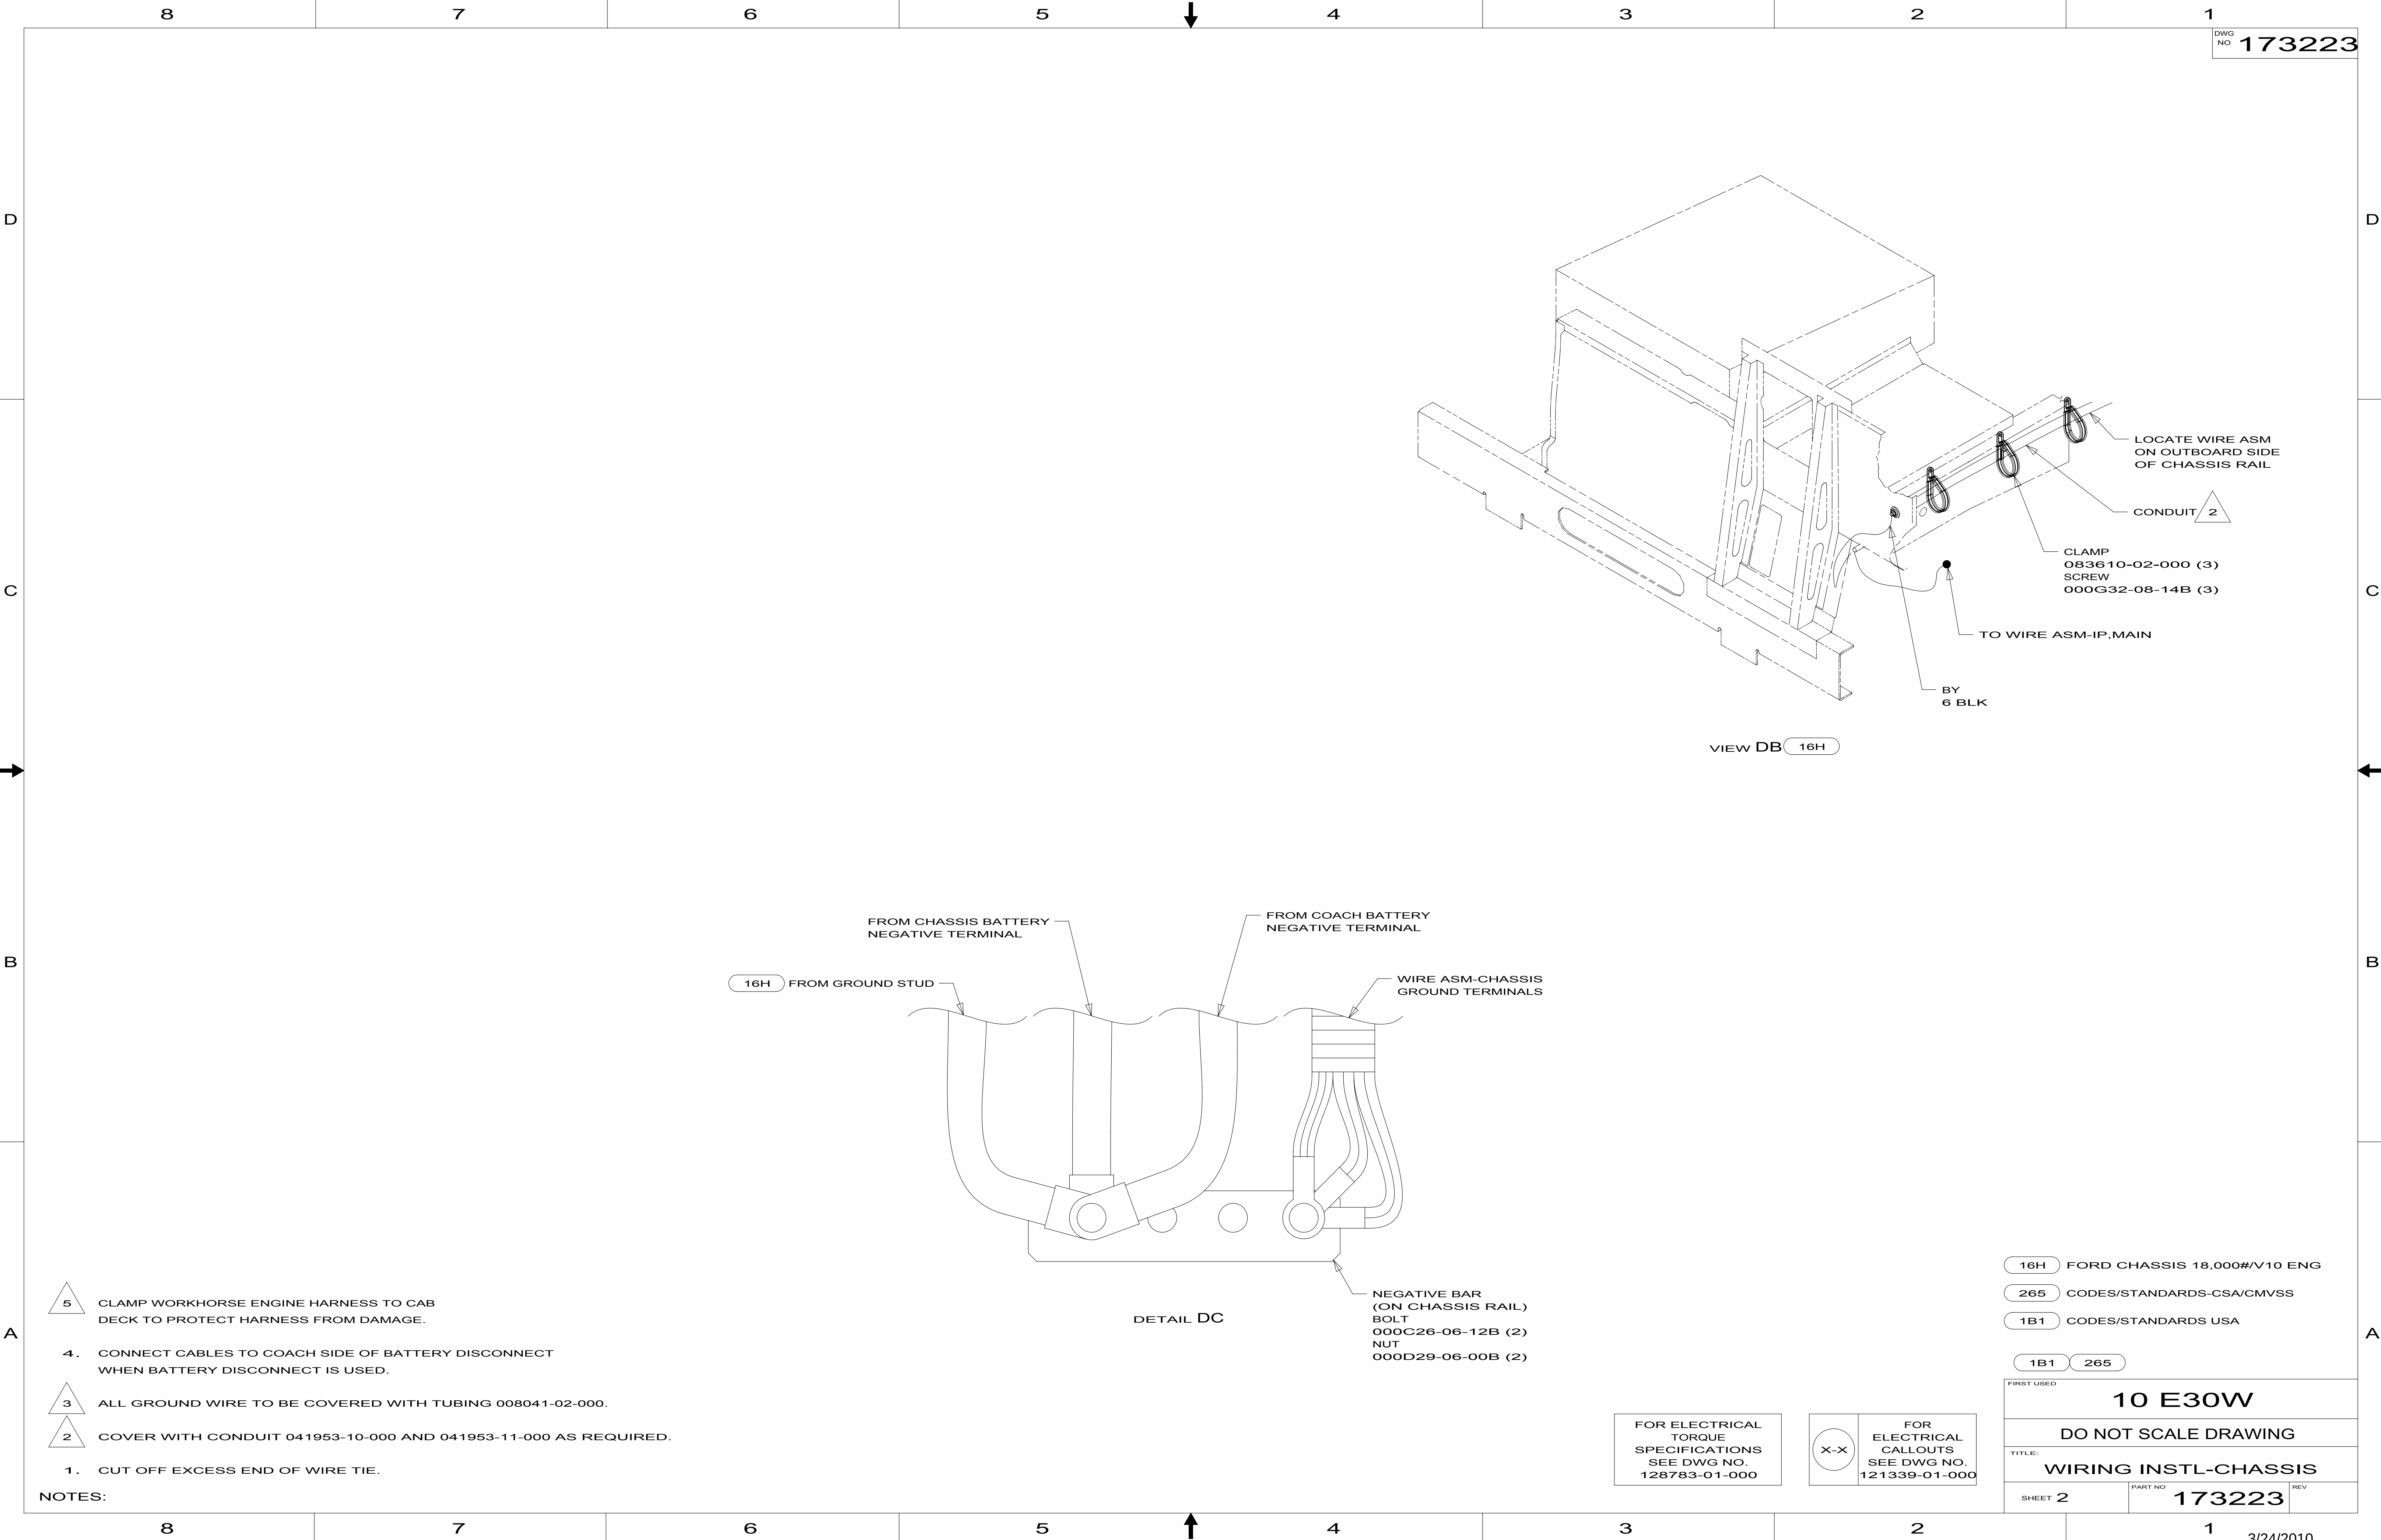

RIGHT FRONT RAM
2 PIN HOUSING
FROM WIRE ASM-SLIDEOUT RAM
TO RAM MOTOR
CIRCUITS PPD,PPE
3 PIN HOUSING
FROM WIRE ASM-CHASSIS
TO SLIDEOUT RAM ENCODER.
CIRCUITS NNT,NNV,NNU

WIRE ASM-
SLIDEOUT RAM,RIGHT
149553-23-000

RIGHT REAR RAM
2 PIN HOUSING
FROM WIRE ASM-SLIDEOUT RAM
TO RAM MOTOR
CIRCUITS PPF,PPG
3 PIN HOUSING
FROM WIRE ASM-CHASSIS
TO SLIDEOUT RAM ENCODER.
CIRCUITS NNW,NNY,NNX.

FRONT LEFT FRONT RAM
2 PIN HSG
FROM WIRE ASM-SLIDEOUT RAM
TO RAM MOTOR
CIRCUITS LLS,LLT
3 PIN HSG
FROM WIRE ASM-CHASSIS
TO SLIDEOUT RAM ENCODER.
CIRCUITS GGG,GGJ,GGH.

FRONT LEFT REAR RAM
2 PIN HSG
FROM WIRE ASM-SLIDEOUT RAM
TO RAM MOTOR
CIRCUITS LLU,LLW
3 PIN HSG
FROM WIRE ASM-CHASSIS
TO SLIDEOUT RAM ENCODER.
CIRCUITS G GK,GGM,GGL.

WIRE ASM-
SLIDEOUT RAM,LEFT
149553-24-000

GROMMET
023942-01-000 (2)

CLAMP
010497-02-000 (2)
SCREW
000G67-10-12B (3)

BRACKET-MODULE MOUNT
154367-20-02B
SCREW
000G39-10-12B (5)

WIRE ASM-
SLIDEOUT POWER 1

SLIDEOUT MODULE RIGHT
171058-02-000(UP TO 08-21-09)
171058-03-000(AFTER 08-22-09)
SCREW
000G39-08-08B (4)

FROM WIRE ASM-
CHASSIS
6 PIN HSG
CIRCUITS
NNU,NNT,NNV,
NNX,NNW,NNY

FROM WIRE ASM-
CHASSIS
10 PIN HSG
CIRCUITS
HHF,NNN,NNP,
NNR,HHE,WWR,
DDJ,WWP,WWWS

FROM WIRE ASM-
SLIDEOUT POWER
4 PIN HSG
CIRCUITS
NNZ,PPA,PPC,PPB

FROM WIRE ASM-
SLIDEOUT RAM,
RIGHT
5 PIN HSG
CIRCUITS
PPD,PPE,PPG,PPF

FROM WIRE ASM-
CHASSIS
6-PIN HSG
CIRCUITS
GGH,GGG,GGJ,
GGL,GGK,GGM

SLIDEOUT MODULE LEFT
171058-03-000(UP TO 01-22-10)
171058-02-000(AFTER 01-23-10)
SCREW
000G39-08-08B (4)

FROM WIRE ASM-
CHASSIS
10-PIN HSG
CIRCUITS
DU,GGD,GGE,GGF,
DR,VVP,DDJ,VVN,VVR

FROM WIRE ASM-
SLIDEOUT RAM, FRONT
5 PIN HSG
CIRCUITS
LLS,LLT,LLW,LLU

FROM WIRE ASM-
SLIDEOUT POWER
4 PIN HSG
CIRCUITS
LLK,LLL,LLM,LLN

VIEW EA

VIEW EB

1 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X
FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

16H FORD CHASSIS 18,000#/V10 ENG

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 16H

FIRST USED		
10 E30W		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-CHASSIS		
SHEET 3	PART NO 173223	REV

8

7

6

5

4

3

2

1

DRAWING NO.

FEATURES

SHEETS

171129-01

1PS1PR

1,2,4

171129-02

16H16L16K

1,3,4

RELEASE

REV A

DATE

DWG NO

171129

REV

ZONE

REVISION RECORD

DATE

DFTR-ORIG

D

D-SERIES

		D31E	D33C	D35J	D37L
CABLE ASM-CHASSIS GND EXT (BLK)	16K16L	133566-12-019	133566-12-042	133566-12-019	133566-12-034
CABLE ASM-CHASSIS POWER EXT (RED)	16K16L	141415-32-018	141415-32-047	141415-32-017	141415-32-038
CABLE ASM-CHASSIS BATTERY DISCONNECT SUPPLY (RED)	16K16L	141415-32-013	141415-32-055	141415-32-013	141415-32-034
CHASSIS SUPPLIED POSITIVE CABLE CHASSIS BATTERY DISCONNECT SUPPLY (RED)	1PS1PR	1300	141415-38-0533	1300	141415-38-0343
CABLE ASM-STARTER (RED)	1PS1PR	141415-35-024	141415-35-052	141415-35-023	141415-35-042
CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL)	16K1PR16L1PS	141416-52-014	141416-52-051	141416-52-014	141416-52-035
CABLE ASM-COACH BATTERY GND (BLK)	16K1PR16L1PS	133567-12-008	133567-12-008	133567-12-008	133567-12-008
CABLE ASM-CHASSIS BATTERY DISCONNECT RETURN (PUR)	16K1PR16L1PS	141415-12-012	141415-12-053	141415-12-012	141415-12-036
CABLE ASM-GENERATOR (GRN)	16K1PR16L1PS	141415-42-089	141415-42-083	141415-42-095	141415-42-105
LEVELING SYSTEM POWER CABLE (BLU)	60M	141415-22-037	141415-22-065	141415-22-033	141415-22-063
LEVELING SYSTEM GND CABLE (BLK)	60M	133566-11-008	133566-11-008	133566-11-008	133566-11-008
WIRE ASM-INVERTER	40D	-----	-----	-----	154845-01-025

C

→

E-SERIES

		E26P	E30W	E32K
CABLE ASM-CHASSIS GND EXT (BLK)	16H16K16N	133566-12-018	133566-12-032	133566-12-031
CABLE ASM-CHASSIS POWER EXT (RED)	16H16K16N	141415-32-020	141415-32-036	141415-32-033
CABLE ASM-CHASSIS BATTERY DISCONNECT SUPPLY (RED)	16H16K16N	141415-32-015	141415-32-024	141415-32-027
CHASSIS SUPPLIED POSITIVE CABLE CHASSIS BATTERY DISCONNECT SUPPLY (RED)	1PJ1PL1PR	1300	141415-38-0253	141415-38-0273
CABLE ASM-STARTER (RED)	1PJ1PL1PR	141415-35-025	141415-35-042	141415-35-038
CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL)	16H16K16N1PJ1PL1PR	141416-52-014	141416-52-027	141416-52-030
CABLE ASM-COACH BATTERY GND (BLK)	16H16K16N1PJ1PL1PR	133567-12-008	133567-12-008	133567-12-008
CABLE ASM-CHASSIS BATTERY DISCONNECT RETURN (PUR)	16H16K16N1PJ1PL1PR	141415-12-012	141415-12-027	141415-12-026
CABLE ASM-GENERATOR (GRN)	16H16K16N1PJ1PL1PR	141415-42-074	141415-42-075	141415-42-089
CABLE ASM-GENERATOR GND (BLK)	16H16K16N1PJ1PL1PR	133566-12-008	133566-12-008	-----
LEVELING SYSTEM POWER CABLE (BLU)	60M	141415-22-035	141415-22-052	141415-22-049
LEVELING SYSTEM GND CABLE (BLK)	60M	133566-11-008	133566-11-008	133566-11-008

B

3

2

1

SEE DETAIL DA FOR CONNECTORS INFORMATION.

LOCATE CHASSIS SUPPLIED POSITIVE CABLE; REDUCE LENGTH TO DIMENSION IN COLUMN AND ADD TERMINAL 68070-01-000 TO THE CUT END (1800MM CHASSIS SUPPLIED LENGTH)

BATTERY CABLES MUST BE INSTALLED TO STARTER MOTOR BEFORE ENGINE WIRING HARNESS AND ROUTED IN SUCH A MANNER AS TO PREVENT ANY POSSIBLE DEGRADATION FROM THE EXHUAUST SYSTEM.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DO NOT SCALE DRAWING

TITLE:

BATTERY INSTL

SHEET 1 OF 4

PART NO 171129

REV

REF:

1

10/31/2009

D

D

C

C

B

B

A


A

→

←

↑

↓

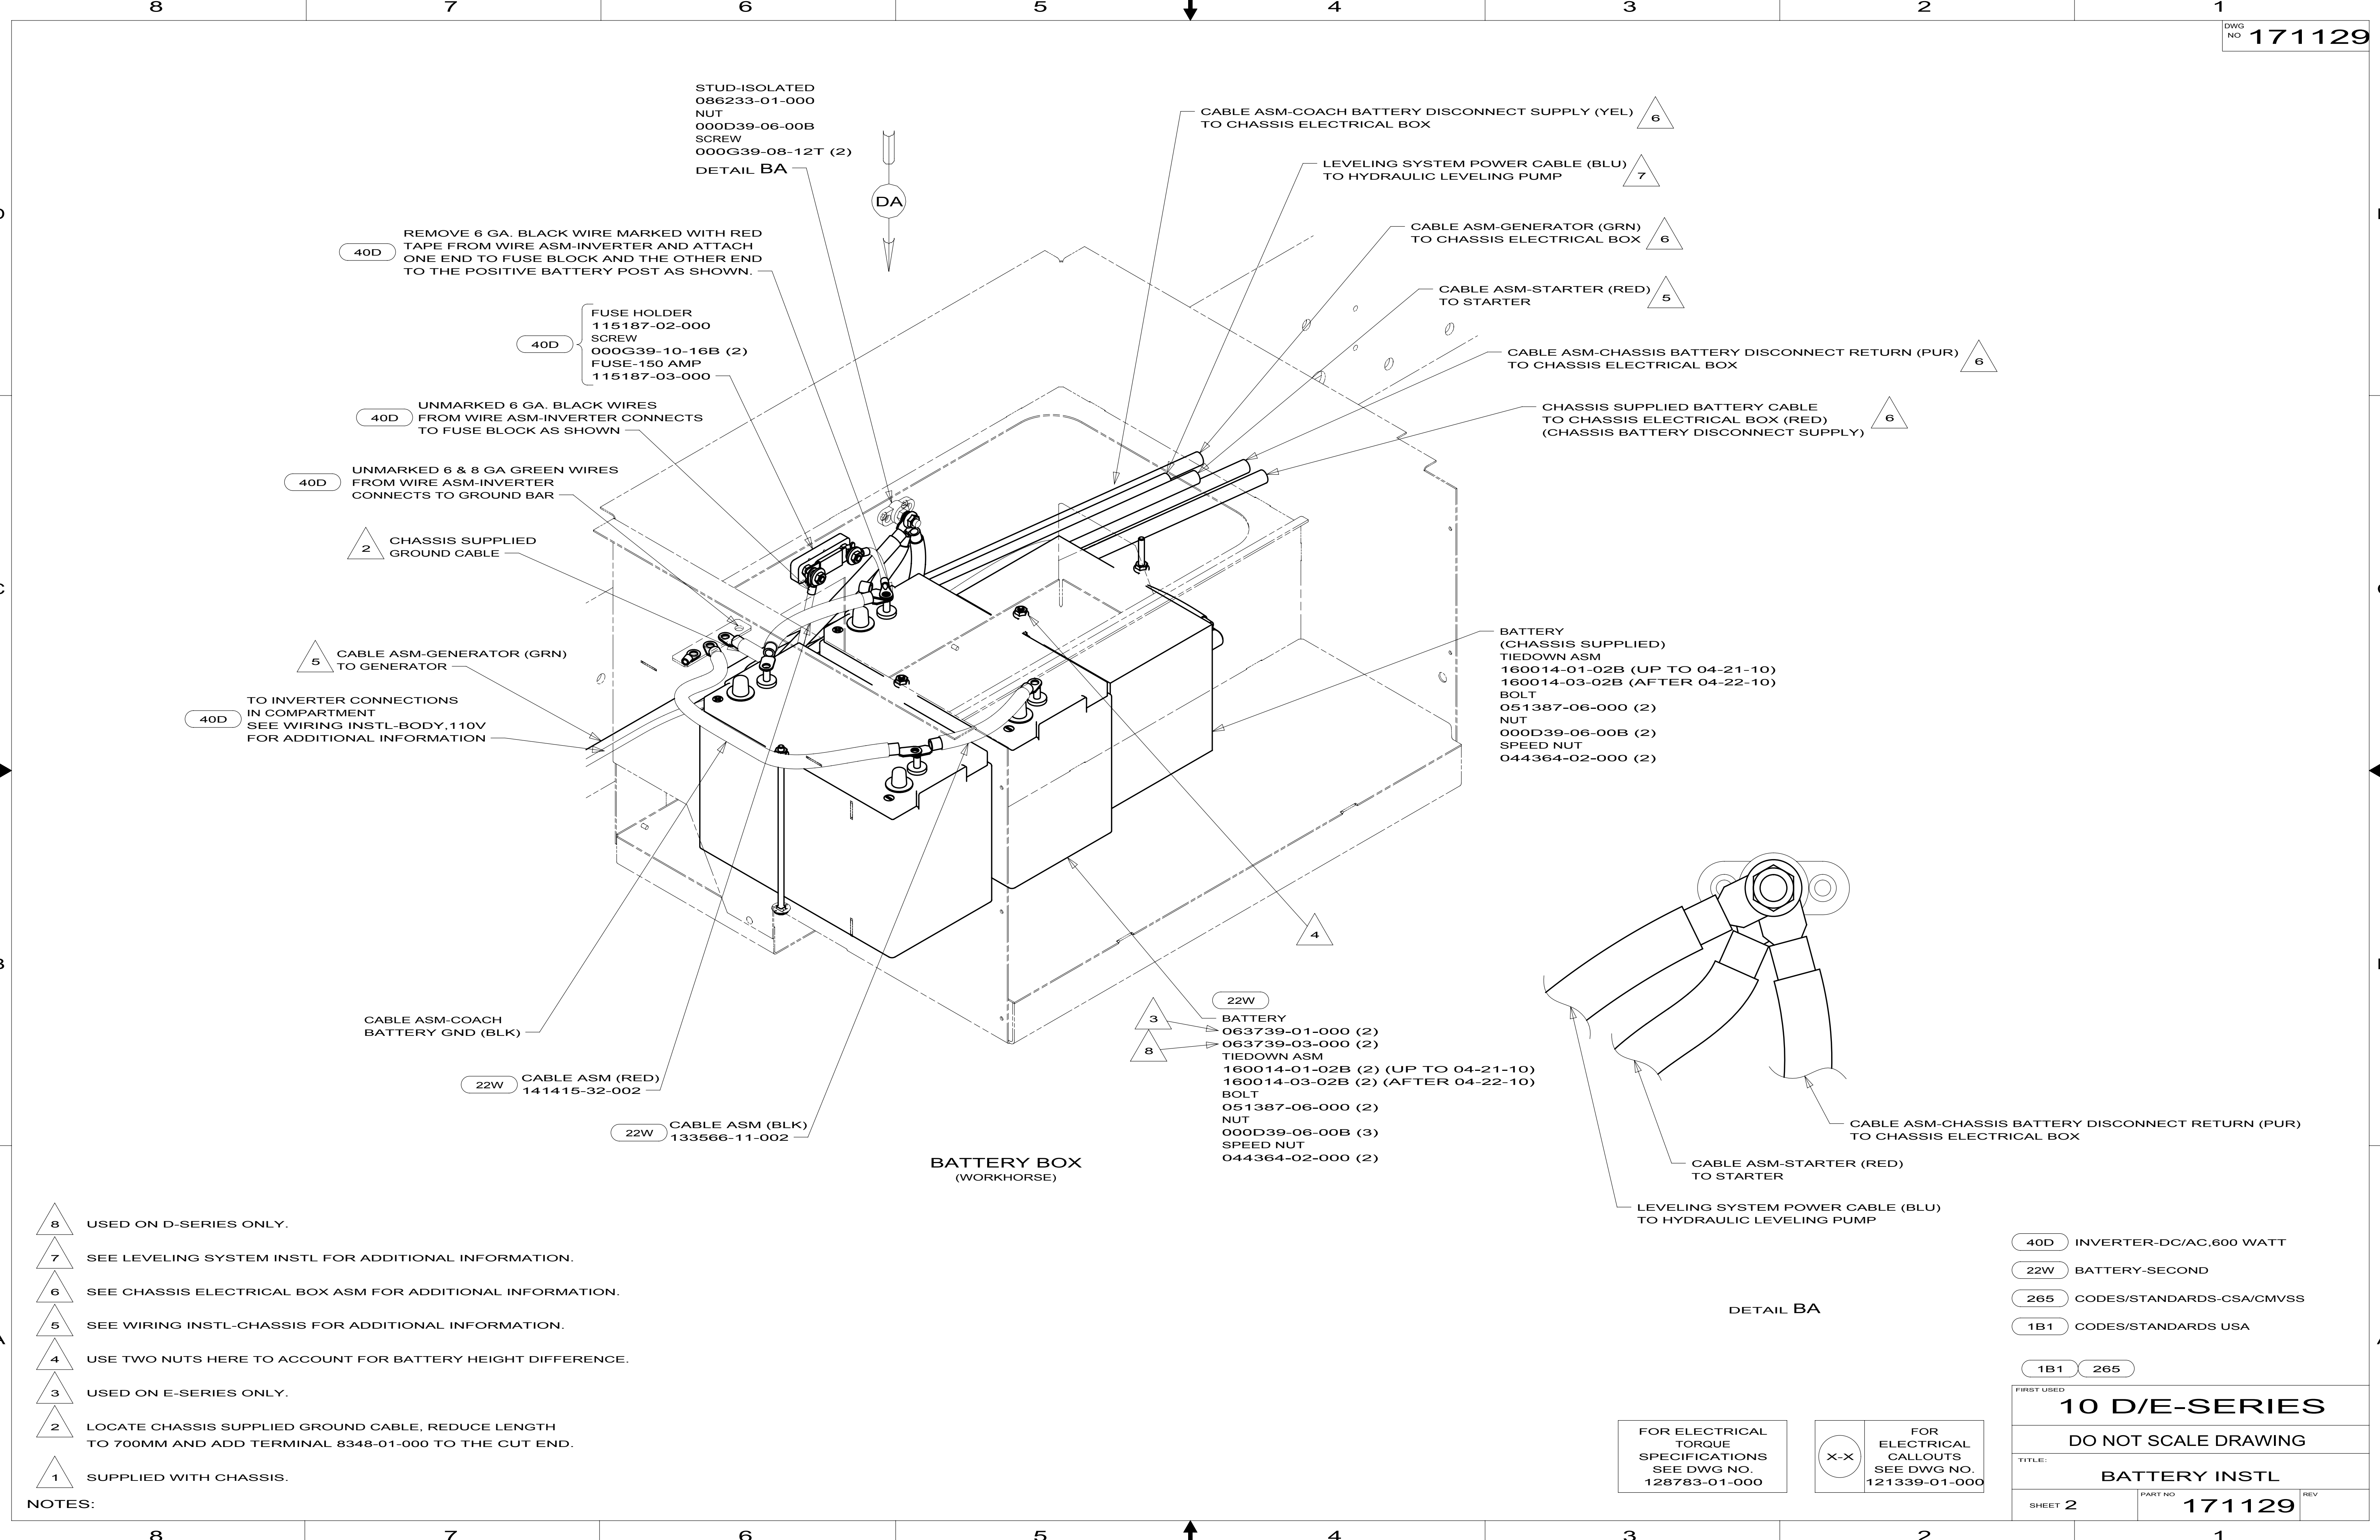

- 8 USED ON D-SERIES ONLY.
- 7 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.
- 6 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 USE TWO NUTS HERE TO ACCOUNT FOR BATTERY HEIGHT DIFFERENCE.
- 3 USED ON E-SERIES ONLY.
- 2 LOCATE CHASSIS SUPPLIED GROUND CABLE, REDUCE LENGTH TO 700MM AND ADD TERMINAL 8348-01-000 TO THE CUT END.
- 1 SUPPLIED WITH CHASSIS.

NOTES:

DETAIL BA

- 40D INVERTER-DC/AC,600 WATT
- 22W BATTERY-SECOND
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D/E-SERIES		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 2	PART NO 171129	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

D

D

C

C

B

B


A

A



A

A

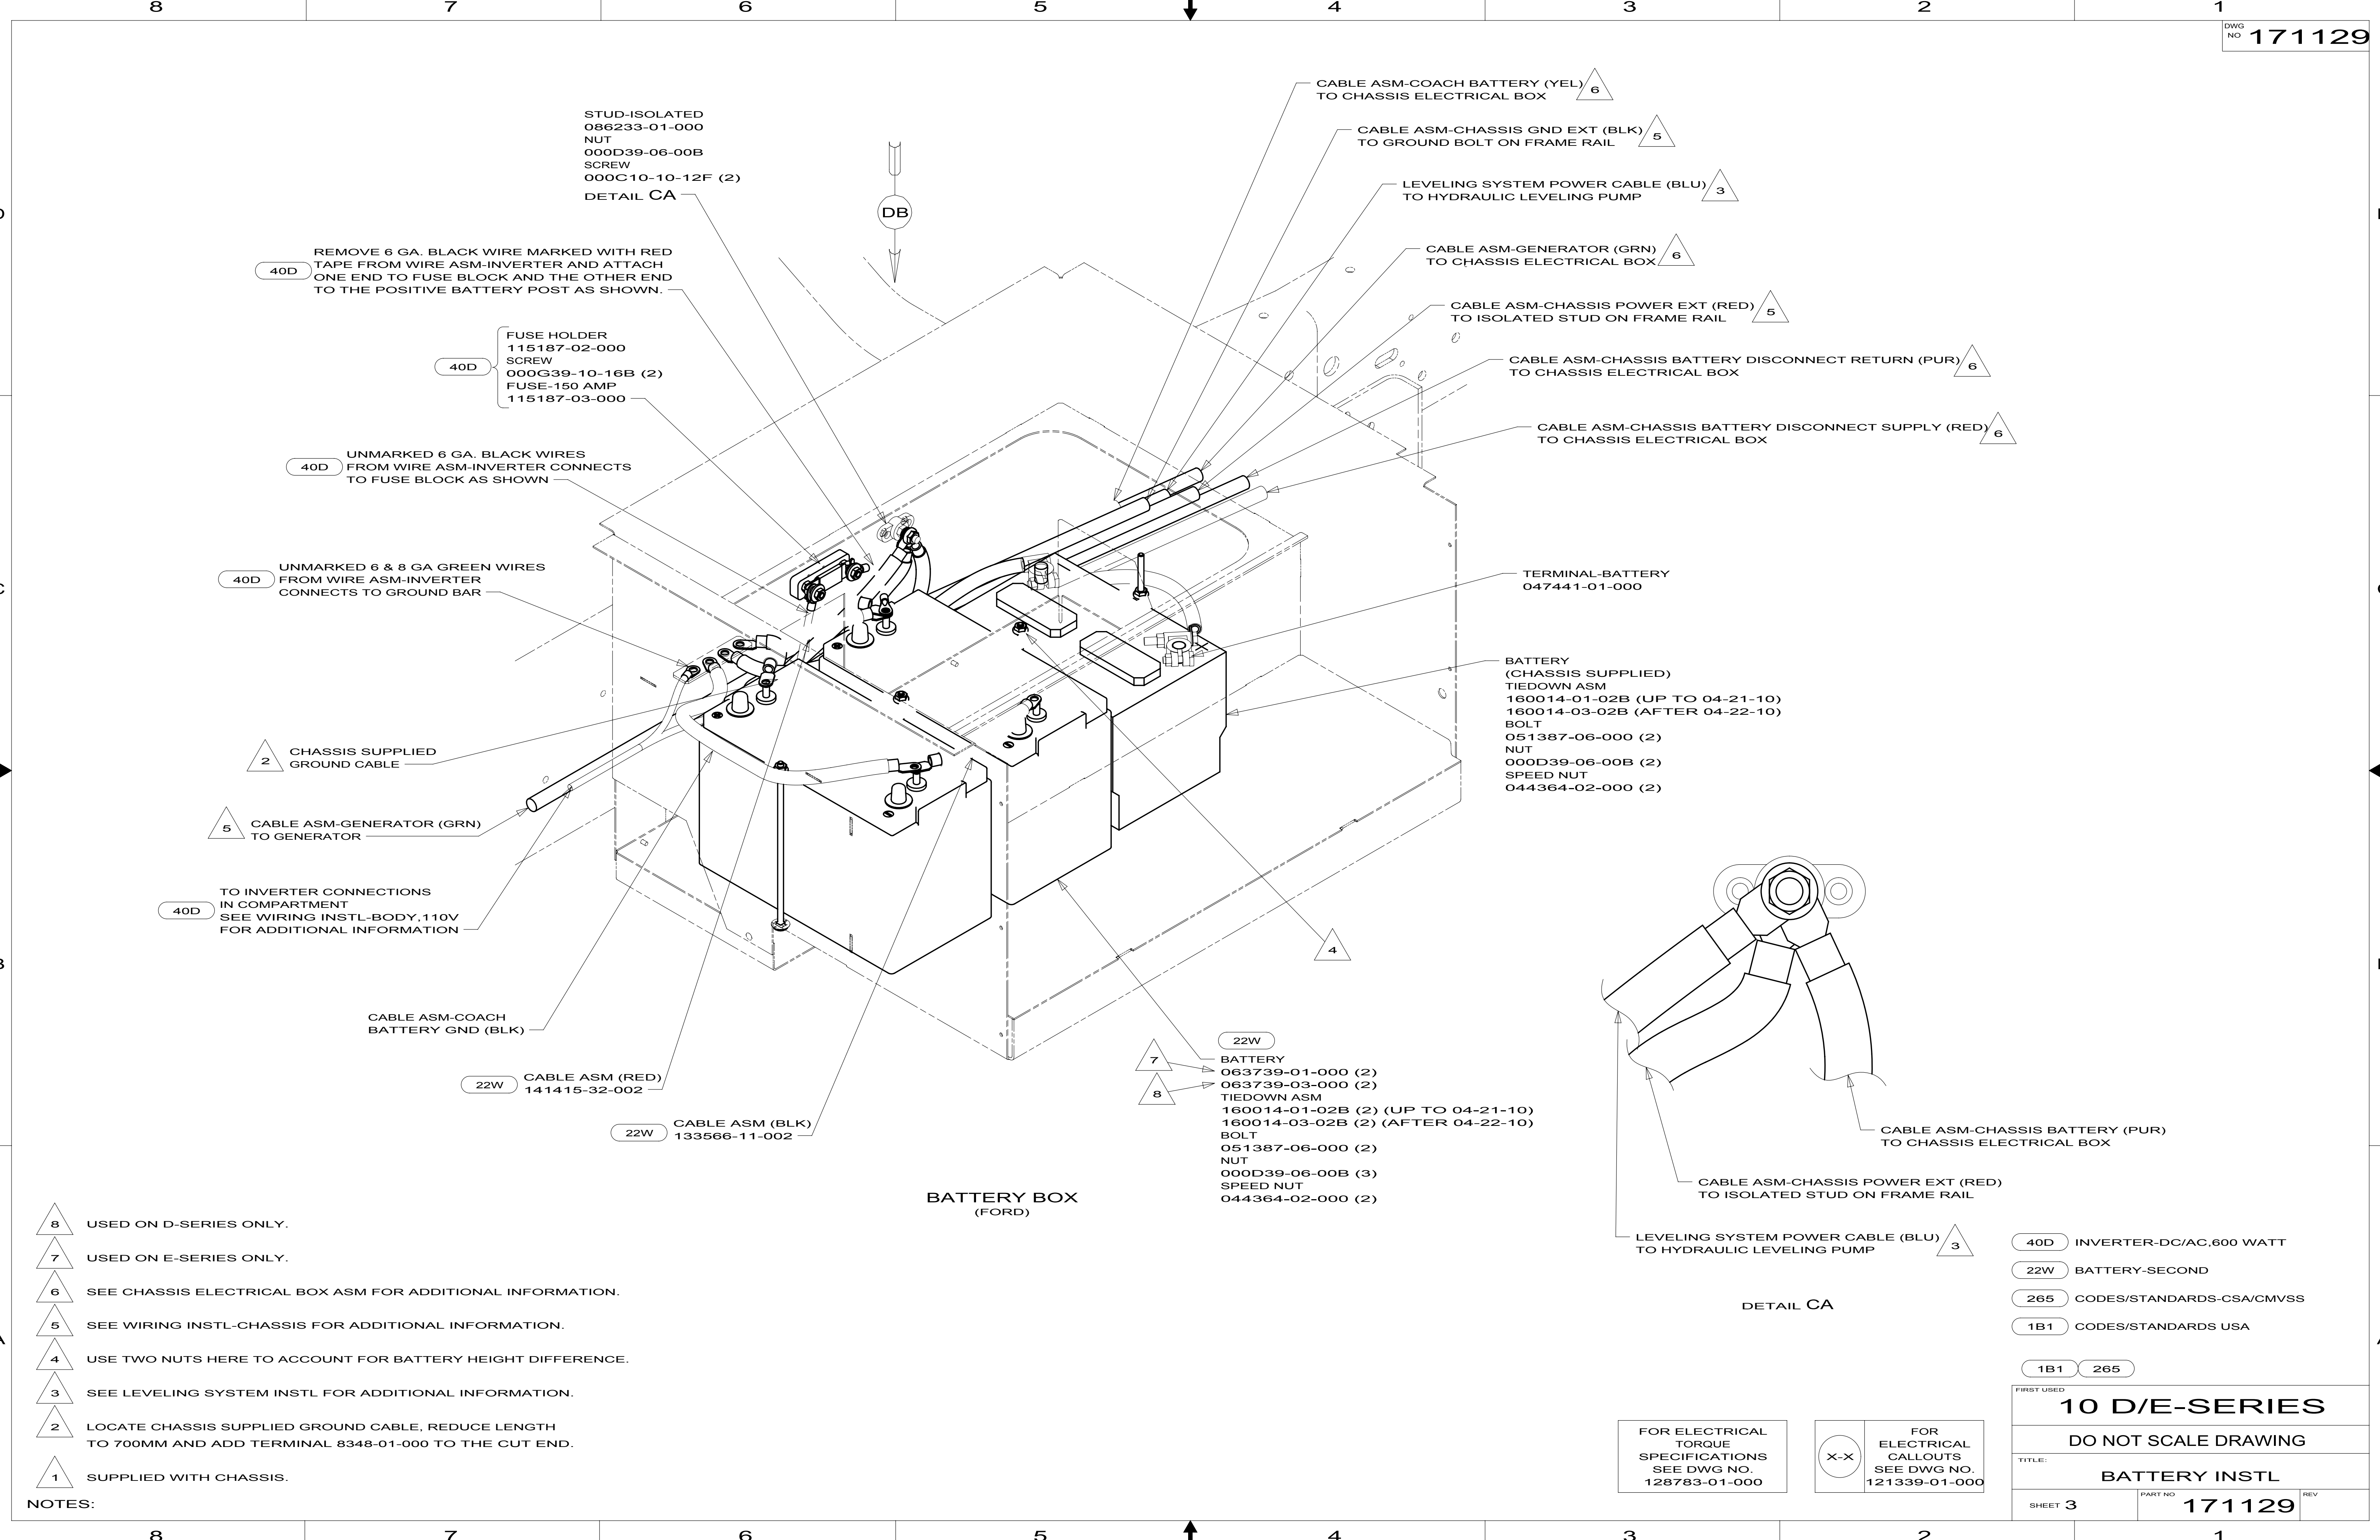

- 8 USED ON D-SERIES ONLY.
- 7 USED ON E-SERIES ONLY.
- 6 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 USE TWO NUTS HERE TO ACCOUNT FOR BATTERY HEIGHT DIFFERENCE.
- 3 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.
- 2 LOCATE CHASSIS SUPPLIED GROUND CABLE, REDUCE LENGTH TO 700MM AND ADD TERMINAL 8348-01-000 TO THE CUT END.
- 1 SUPPLIED WITH CHASSIS.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

40D INVERTER-DC/AC,600 WATT

22W BATTERY-SECOND

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

10 D/E-SERIES


DO NOT SCALE DRAWING

TITLE: BATTERY INSTL

SHEET 3

PART NO 171129

REV

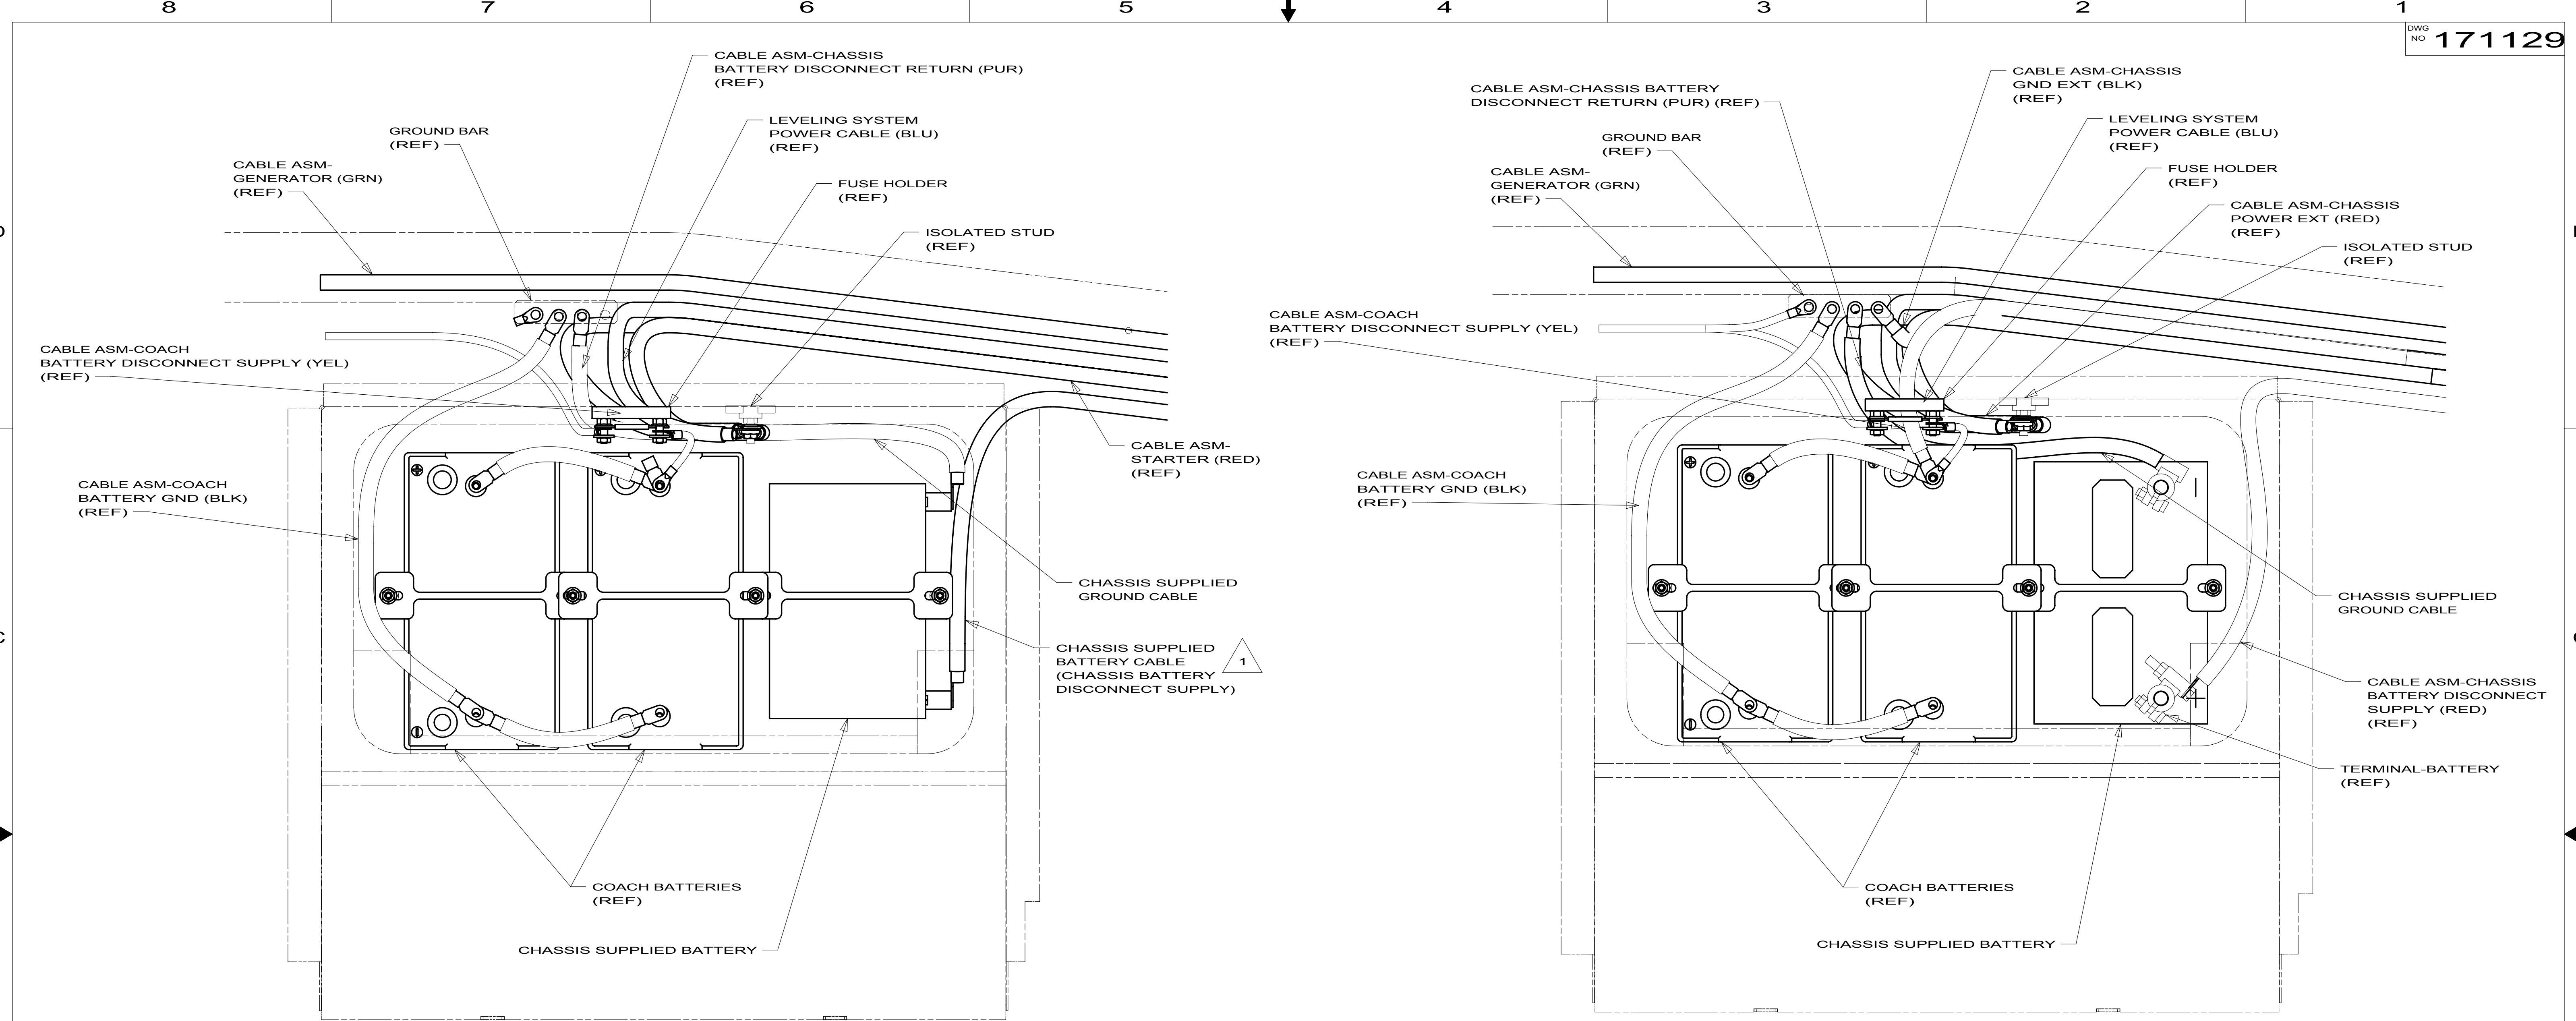

VIEW DA
(WORKHORSE)

VIEW DB
(FORD)

1

ON D29R & D37L ONLY, DISCONNECT CHASSIS SUPPLIED CABLE
AND REPLACE WITH CABLE ASM ON SHT 1. SECURE RING TERMINAL
TO BATTERY USING SIDEPOST BOLT 166472-02-000.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

10 D/E-SERIES

DO NOT SCALE DRAWING

TITLE:


BATTERY INSTL

SHEET 4

PART NO

171129

REV

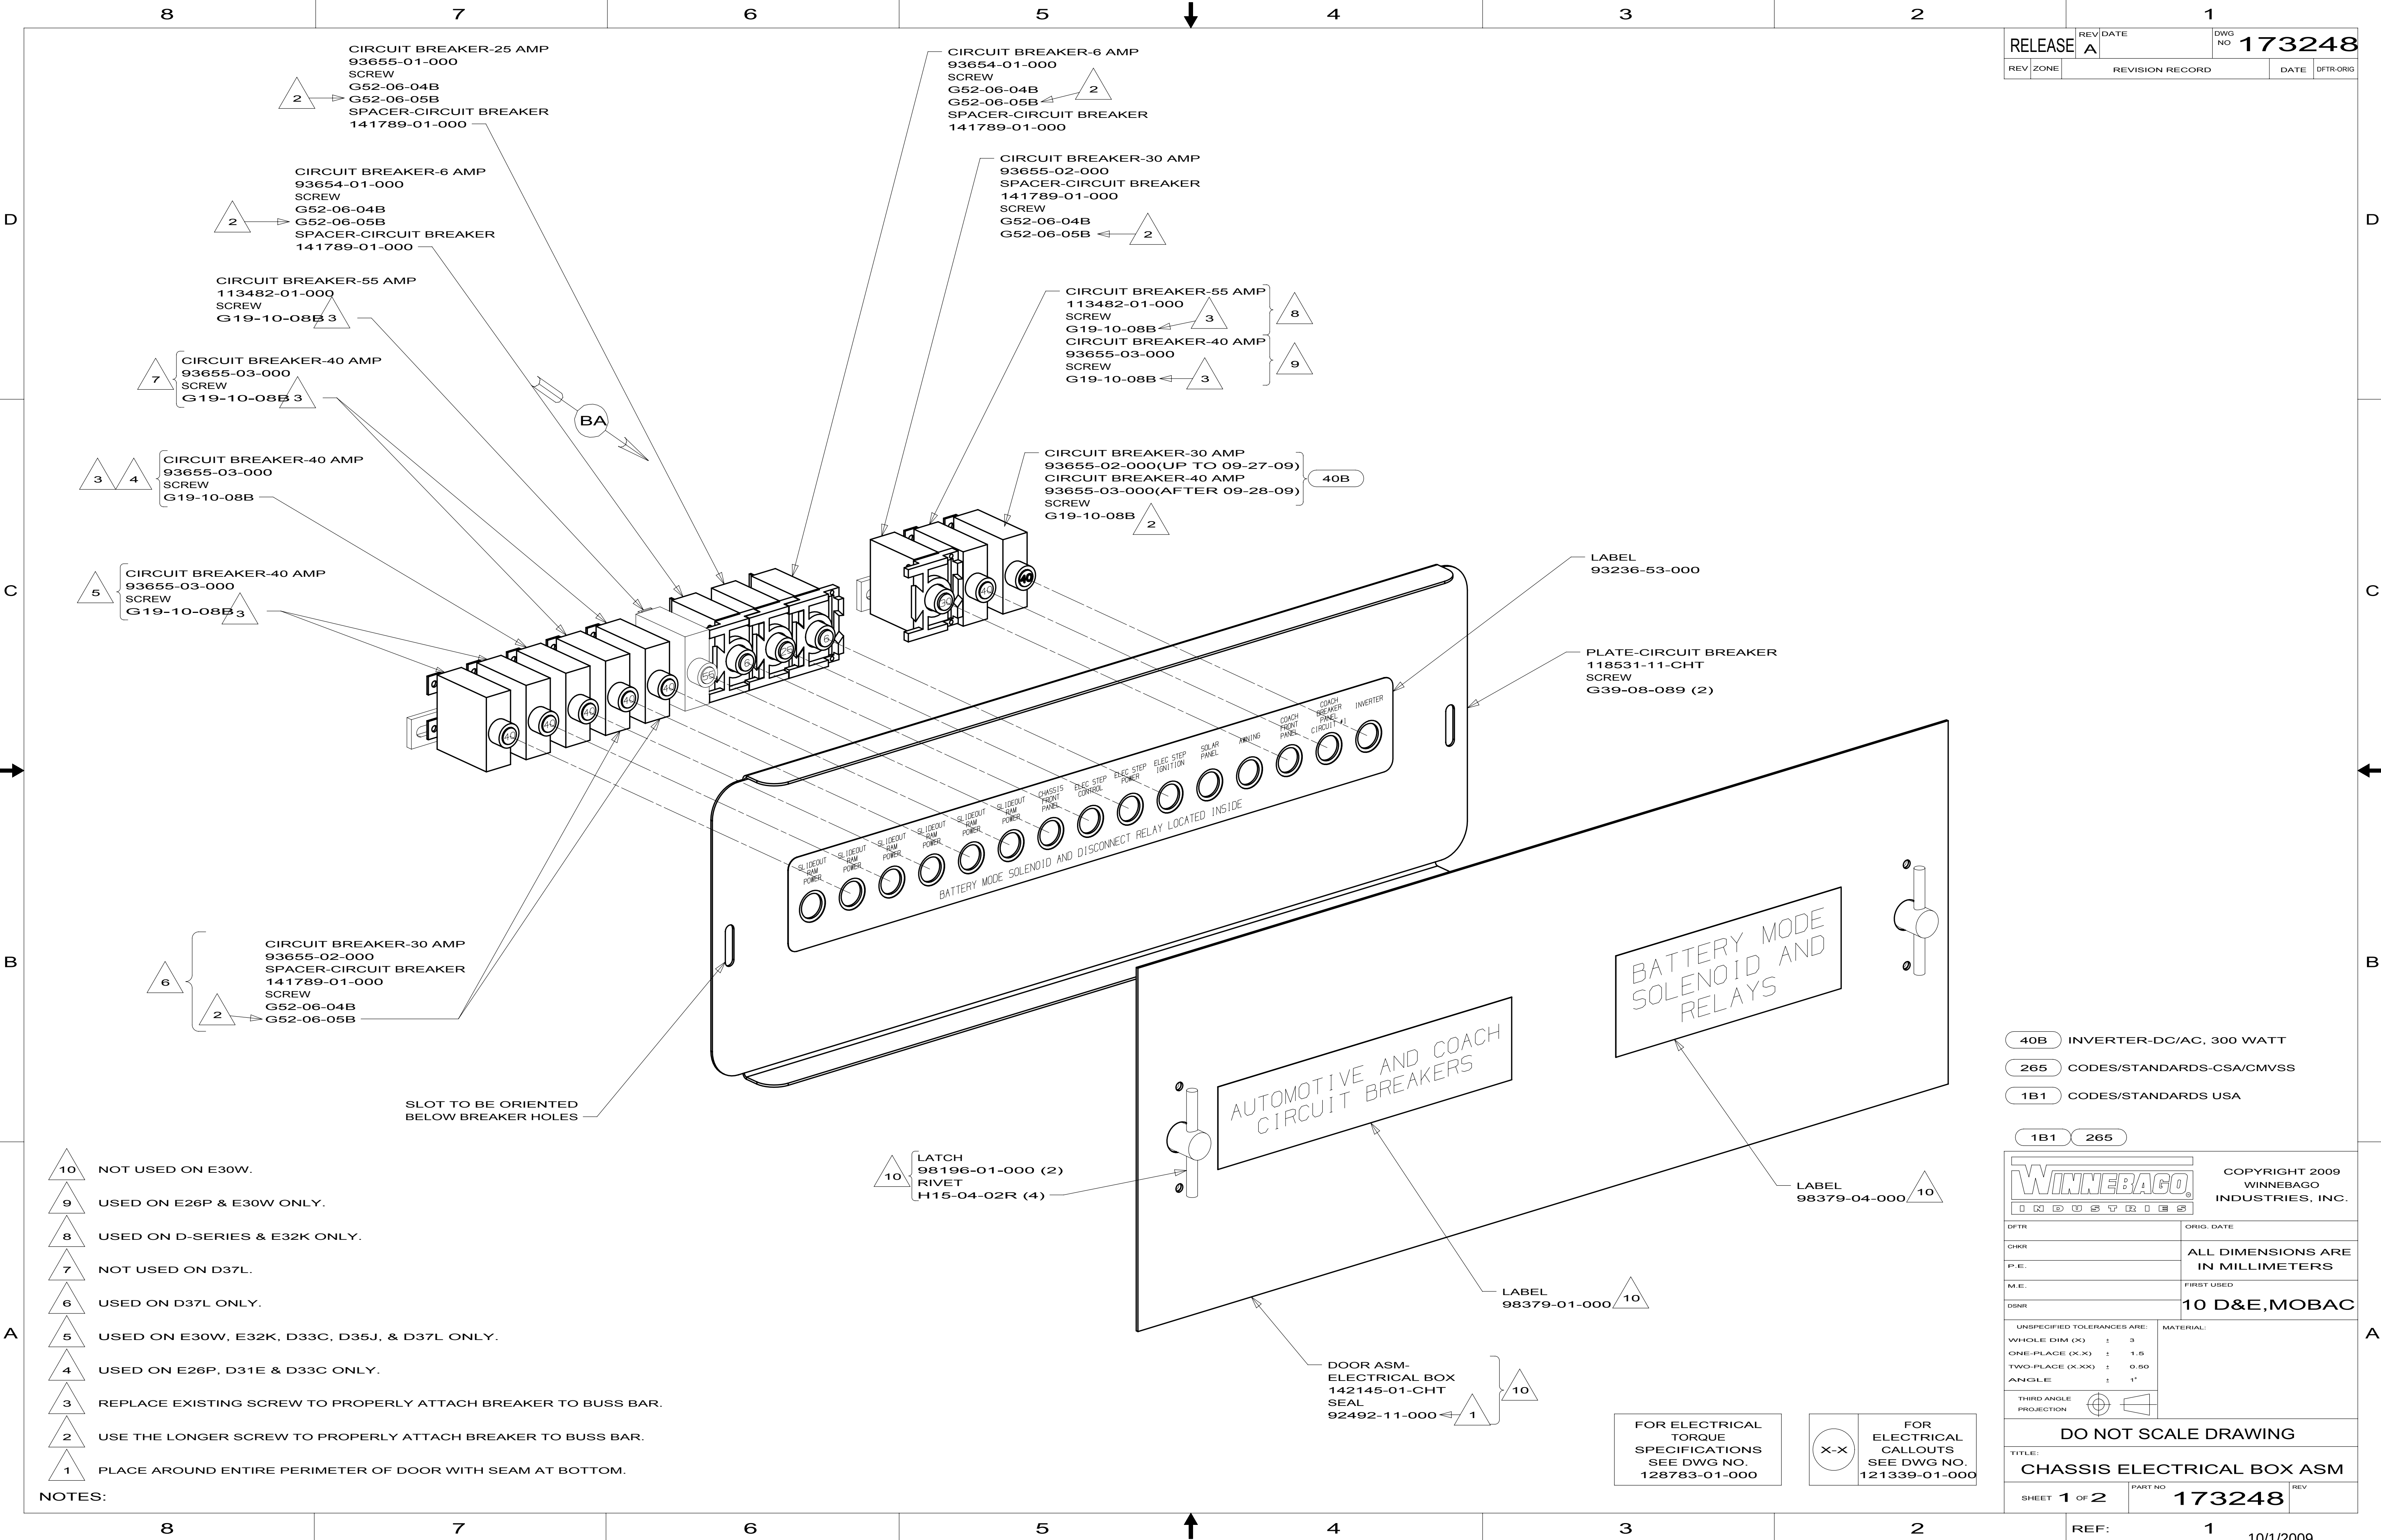

RELEASE		REV	DATE	DWG NO	173248	
REV	ZONE	REVISION RECORD			DATE	DFT-ORIG

- NOTES:
- 10 NOT USED ON E30W.
 - 9 USED ON E26P & E30W ONLY.
 - 8 USED ON D-SERIES & E32K ONLY.
 - 7 NOT USED ON D37L.
 - 6 USED ON D37L ONLY.
 - 5 USED ON E30W, E32K, D33C, D35J, & D37L ONLY.
 - 4 USED ON E26P, D31E & D33C ONLY.
 - 3 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
 - 2 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
 - 1 PLACE AROUND ENTIRE PERIMETER OF DOOR WITH SEAM AT BOTTOM.

40B

INVERTER-DC/AC, 300 WATT

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

WINNEBAGO INDUSTRIES

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHGR	
P.E.	ALL DIMENSIONS ARE IN MILLIMETERS
M.E.	FIRST USED
DSNR	10 D&E,MOBAC
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	

DO NOT SCALE DRAWING

TITLE: CHASSIS ELECTRICAL BOX ASM	
SHEET 1 OF 2	PART NO 173248



REF: 1

10/1/2009

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

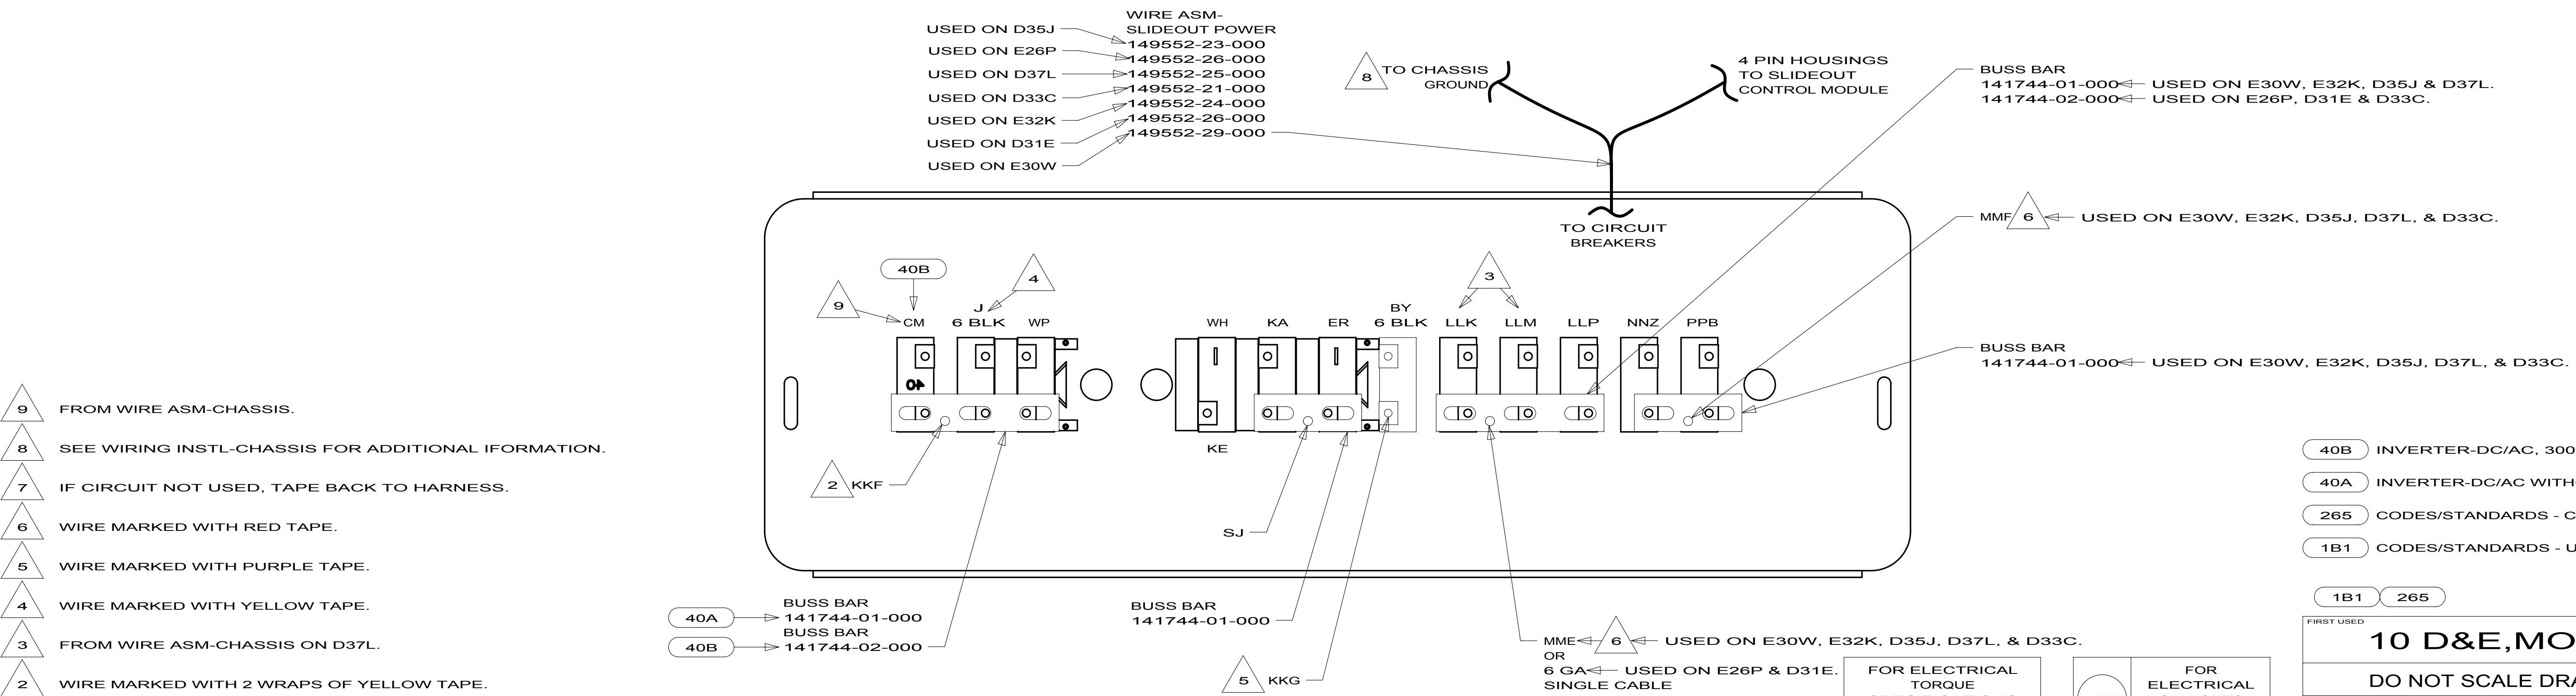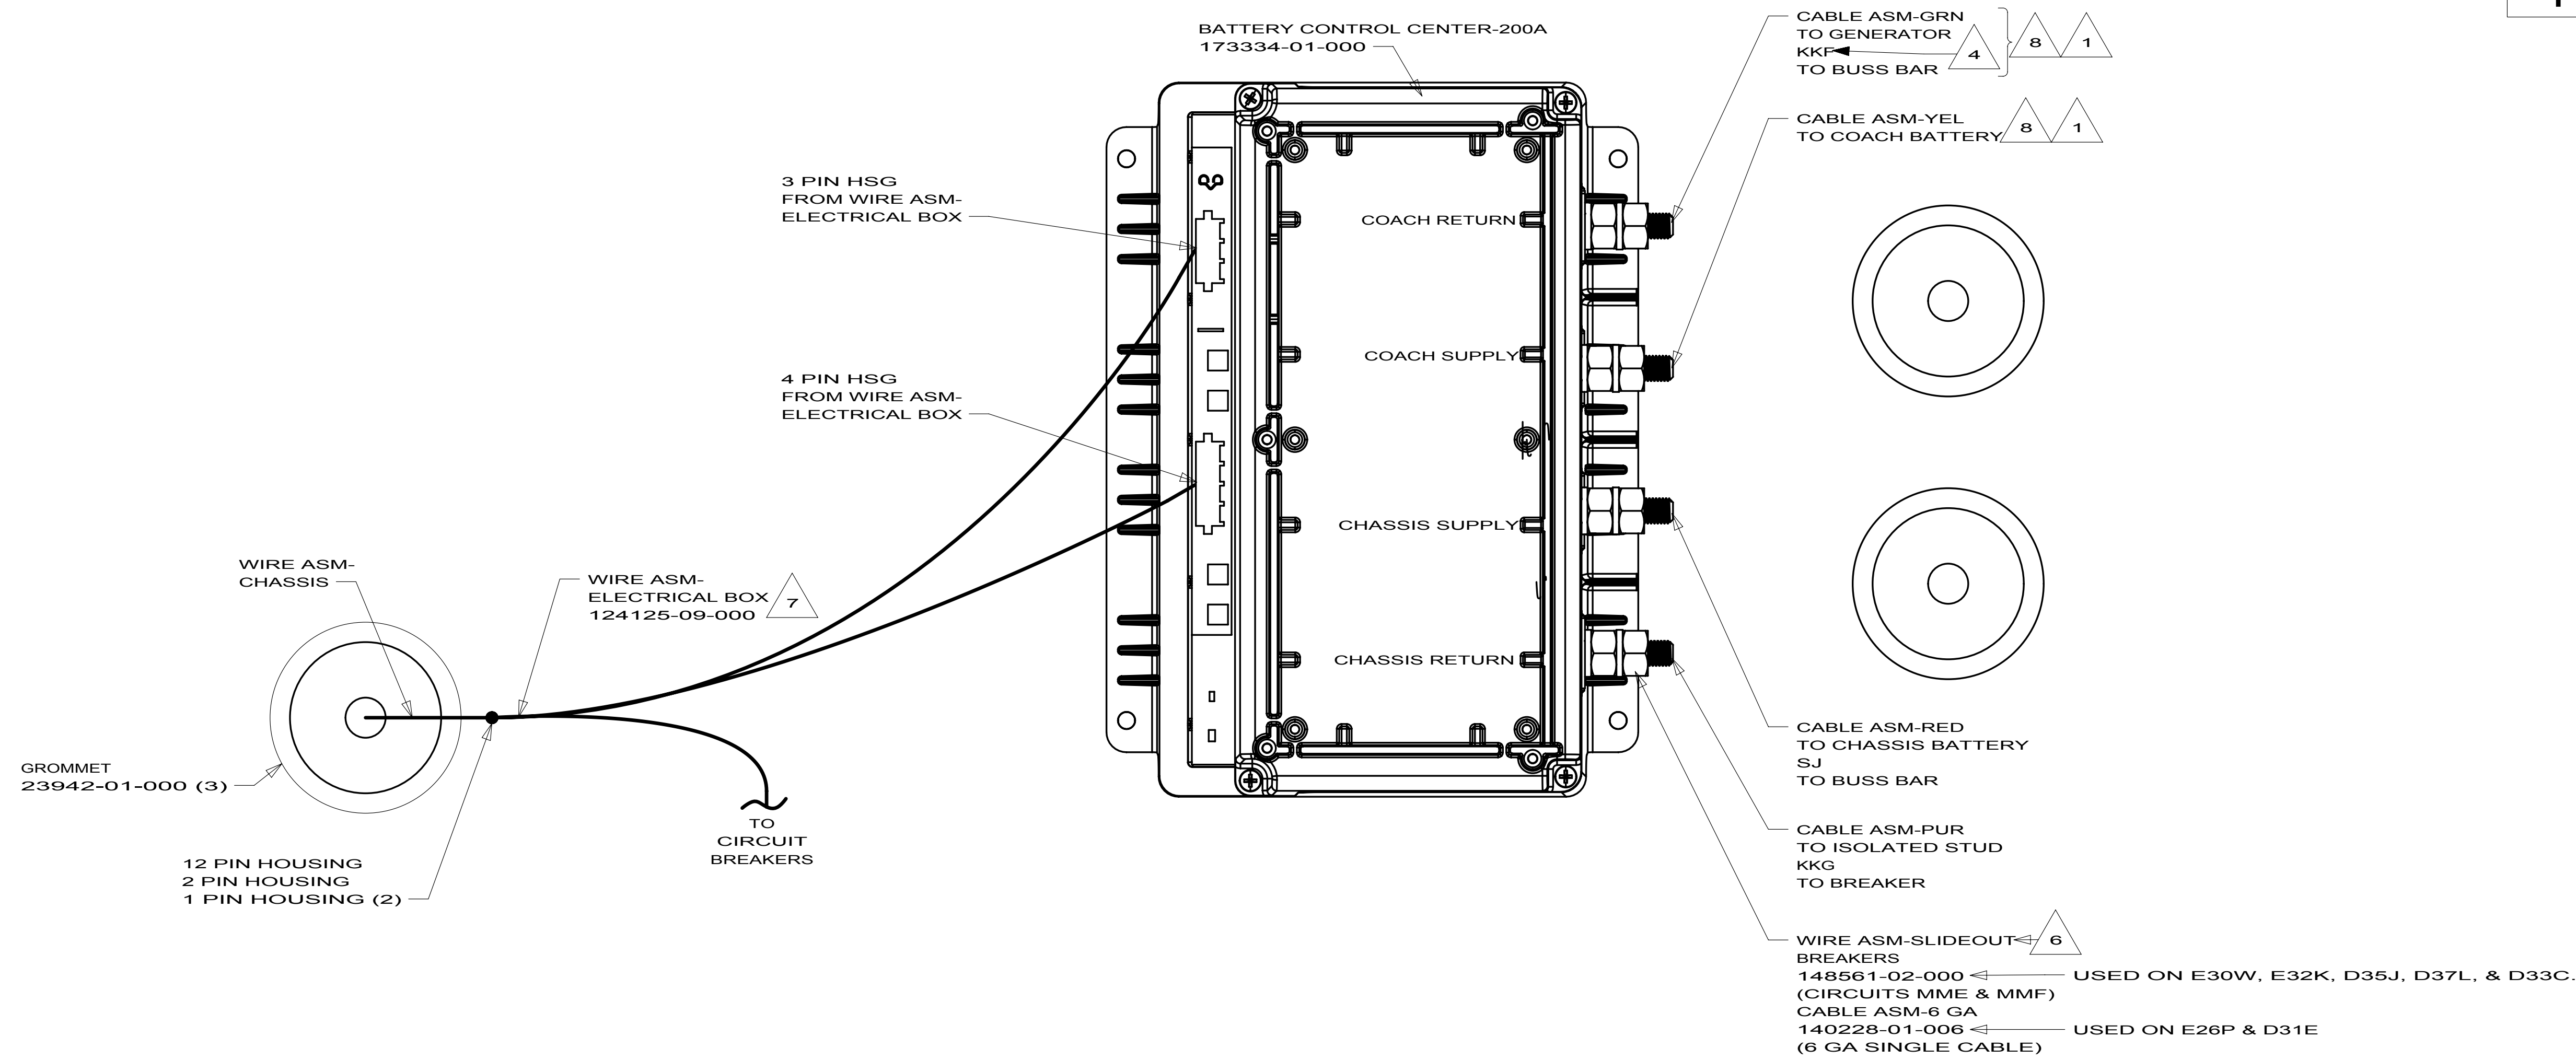

- NOTES:
- 9 FROM WIRE ASM-CHASSIS.
 - 8 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL IFORMATION.
 - 7 IF CIRCUIT NOT USED, TAPE BACK TO HARNESS.
 - 6 WIRE MARKED WITH RED TAPE.
 - 5 WIRE MARKED WITH PURPLE TAPE.
 - 4 WIRE MARKED WITH YELLOW TAPE.
 - 3 FROM WIRE ASM-CHASSIS ON D37L.
 - 2 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.
 - 1 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

- 40B INVERTER-DC/AC, 300 WATT
- 40A INVERTER-DC/AC WITHOUT
- 265 CODES/STANDARDS - CSA/CMVSS
- 1B1 CODES/STANDARDS - USA


FIRST USED		
10 D&E,MOBAC		
DO NOT SCALE DRAWING		
TITLE:		
CHASSIS ELECTRICAL BOX ASM		
SHEET 2	PART NO	REV
	173248	

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DETAIL BA

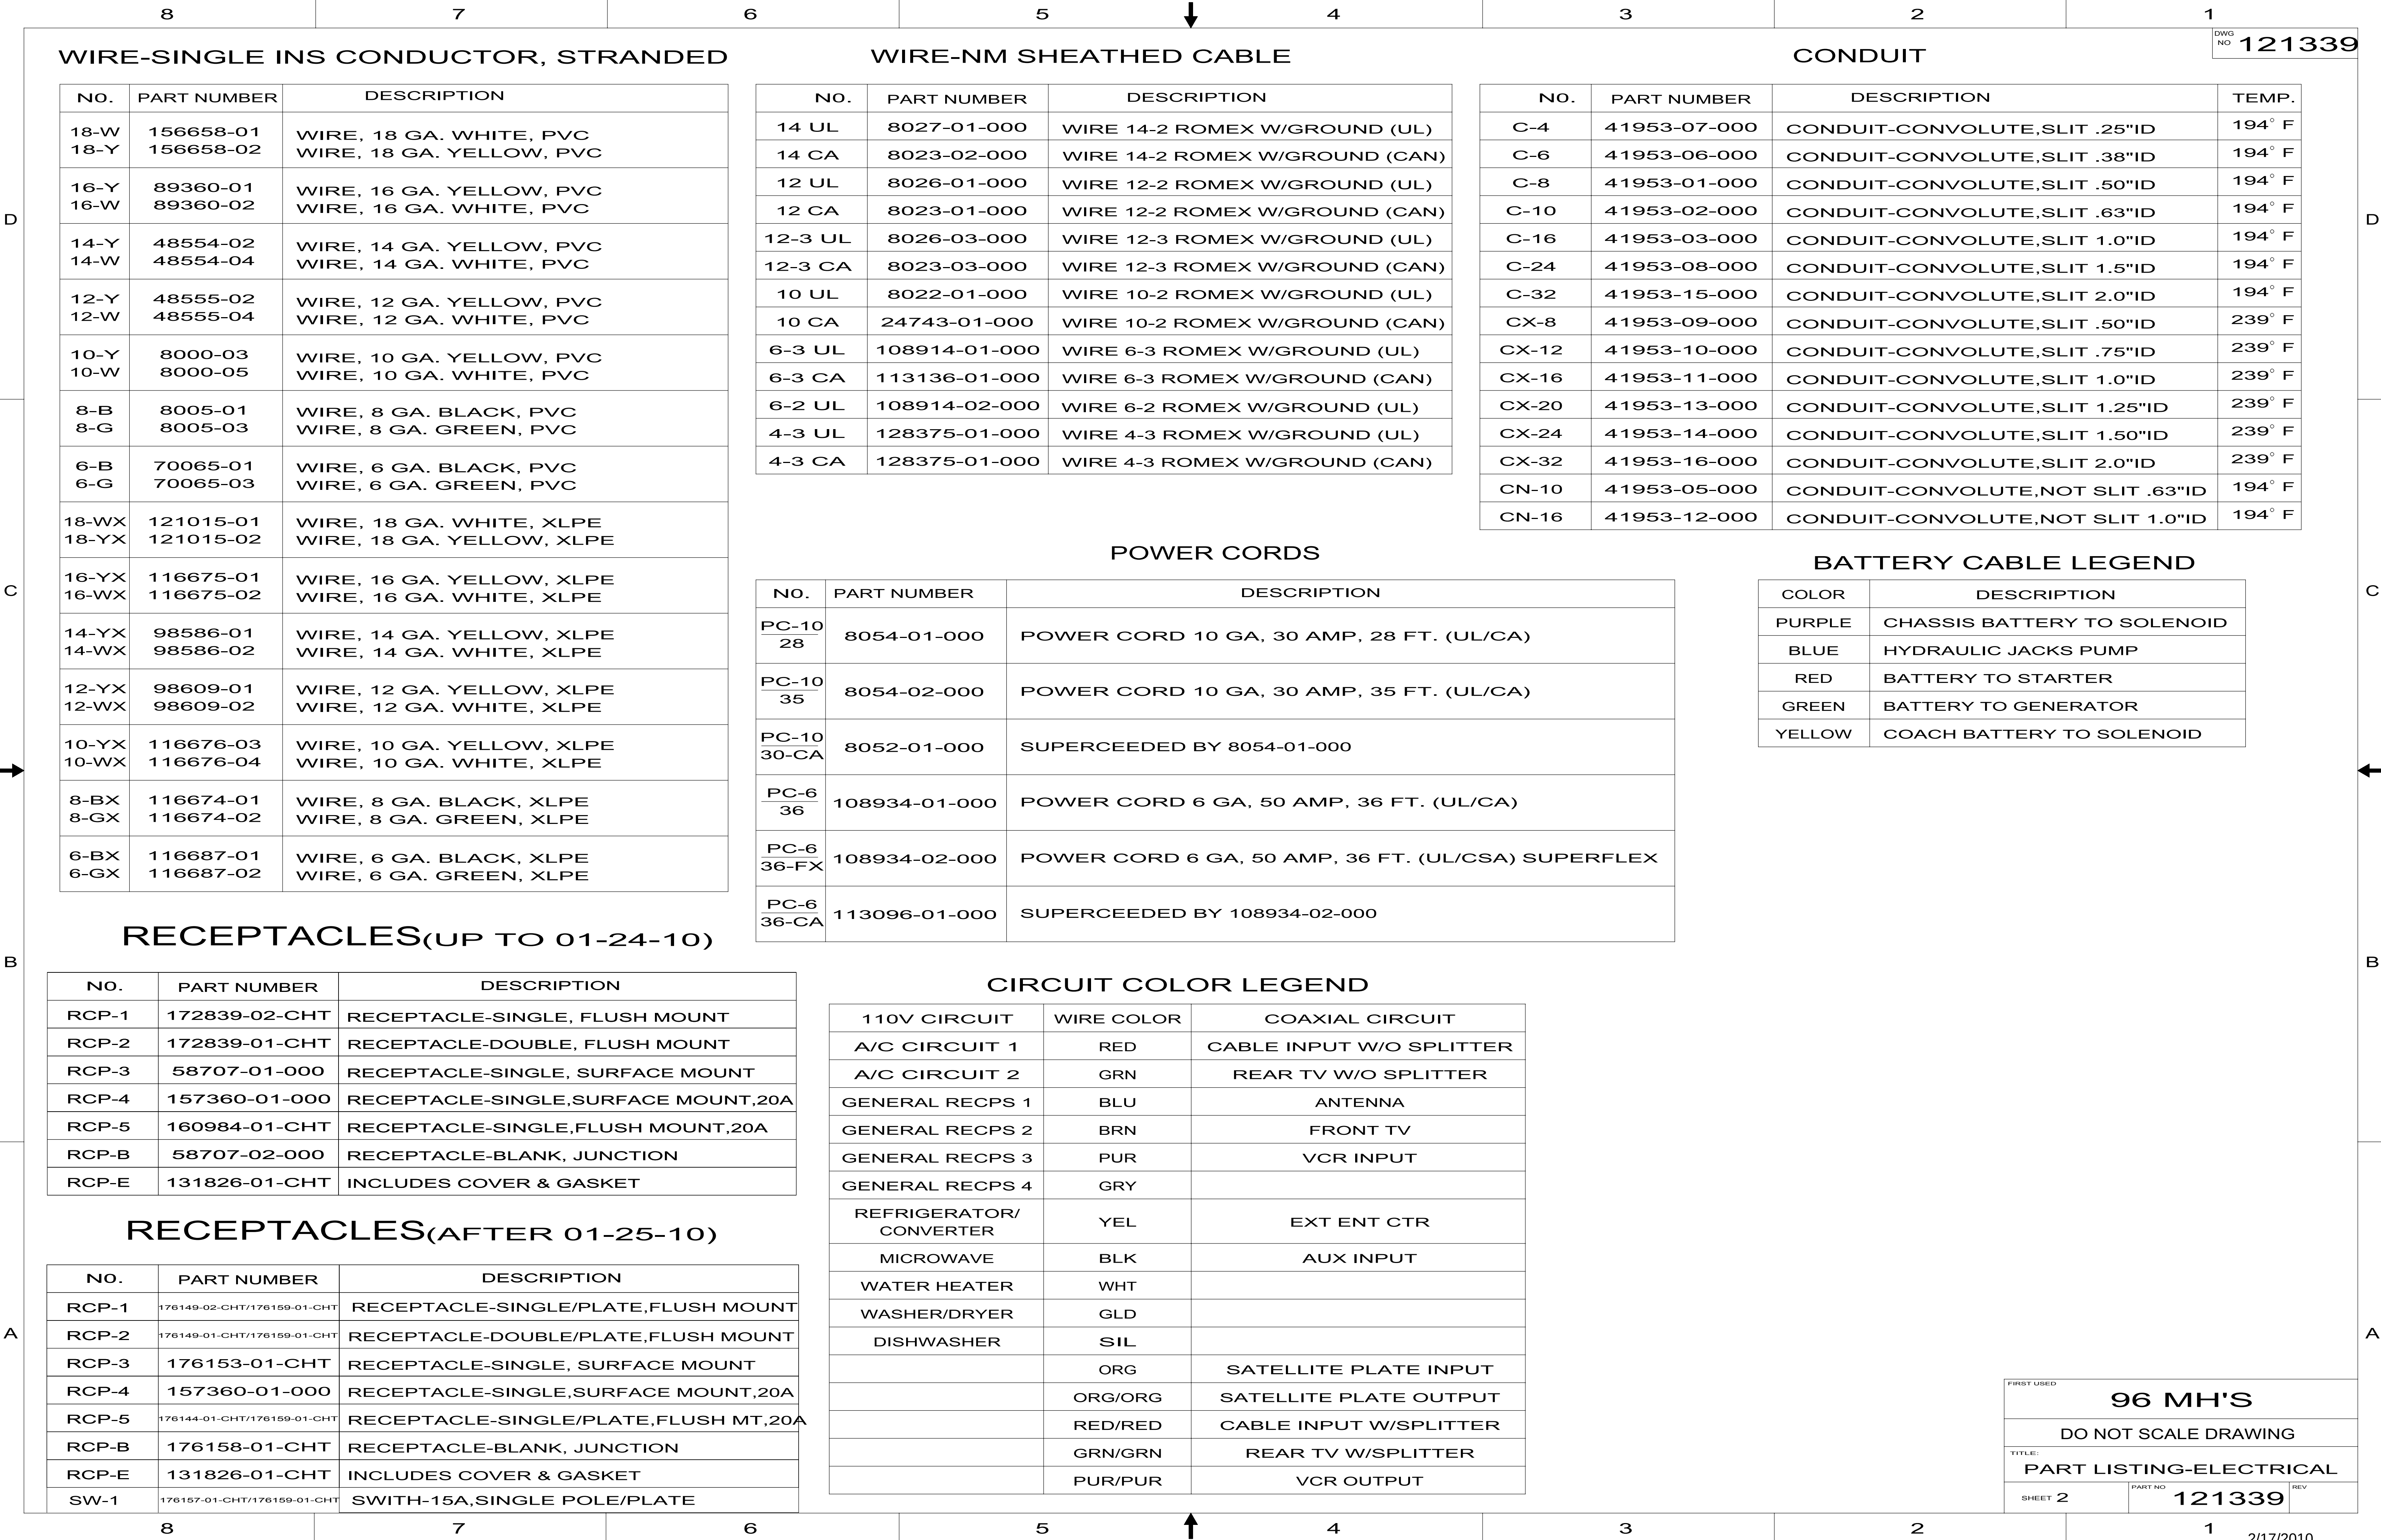

8

7

6

5








4

3


2

1

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-1	LAMP 98024-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-1	LAMP 98024-03-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-1	LAMP 98024-05-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-1	LAMP 98024-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N1	LAMP 98024-07-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LF2N1	LAMP 98024-08-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN1	LAMP 98024-09-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,PORCH

NO	PART NUMBER	DESCRIPTION
LEXT-1	LAMP 97917-01-CHT SCREW G67-10-129 (4) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, SURFACE MOUNT BARGMAN 
LEXT-2UL	LAMP 8089-01-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED UL LIST JRV PROD 
LEXT-2CA	LAMP 8089-02-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED CAN LIST JRV PROD 
LEXT-3	LAMP 171513-01-CHT SCREW G67-10-129 (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH SURFACE MOUNT OPTRONICS

87.0

22.2 R

96

CUT OUT IN PANEL

HALOGEN LAMP

LINE SPRING CLIPS UP WITH RELIEF IN CUT OUT

DETAIL CA

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

XXXXXX

XX

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 3





PART NO121339

REV





DWG NO121339
























2/17/2010

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-2	LAMP 137417-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-2	LAMP 137417-04-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-2	LAMP 137417-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-2	LAMP 137417-05-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N2	LAMP 137417-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN2	LAMP 137417-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,HALOGEN

NO	PART NUMBER	DESCRIPTION
HAL	LAMP 123775-01-CHT SCREW (SUPPLIED) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING 1 BULB 
HAL-S	LAMP 123775-01-CHT SPACER 123775-02-CHT SCREW G13-06-16U (3) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING WITH 3/4" SPACER 1 BULB 
HAL-2	LIGHT-HAL,ROUND 165170-01-CHT SCREW G13-06-12B (2) CONNECTOR 58028-01-000 (2)	LIGHT-HALOGEN, ROUND 3" 
HAL-4	LIGHT-HAL,ROUND 165643-01-CHT SCREW G13-05-16B (3) CONNECTOR 58028-01-000 (2) (SEE DETAIL CA)	LIGHT-HALOGEN, ROUND 4.5" 

8			7			6			5			4			3			2			1																													
LAMP ASM-PACKAGE,FLUORESCENT												LAMP ASM-PACKAGE,MAKEUP LAMP												LAMP ASM-PACKAGE,OTHER												LAMP ASM-PACKAGE,PANCAKE												DWG NO 121339		
NO		PART NUMBER				DESCRIPTION						NO		PART NUMBER				DESCRIPTION						NO		PART NUMBER				DESCRIPTION																				
FLU-1		LAMP 91936-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH THIN-LITE 						LMU3-1		LAMP 110235-01-CHT SCREW W/SPACER (SUPPLIED) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB (SUPPLIED) PROGRESSIVE DYNAMICS 						LSH-1		LAMP 121935-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-SHOWER PROGRESSIVE DYNAMICS INC. 						LF1-3		LAMP 170693-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH GUSTAFSON 								
FLU-2		LAMP 91936-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/SWITCH THIN-LITE 						LMM3-2		LAMP 123774-03-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 3 BULB GUSTOFSON 						LSH-2		LAMP 164039-01-CHT SCREW G11-08-16U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER 						LF2-3		LAMP 170693-04-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH GUSTAFSON 								
FLU-3		LAMP 127327-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 1-12" BULB W/SWITCH THIN-LITE 						LMU3-2		LAMP 138116-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 						LSH-3		LAMP 164040-01-CHT SCREW G13-07-12U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER GLASS 						LO1-3		LAMP 170693-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH GUSTAFSON 								
FLU-4		LAMP 130338-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT W/SWITCH THIN-LITE 						LMU3-3		LAMP 162446-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 						LCR-1		LAMP 61424-01-000 SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE RAMCO (RECTANGULAR) 						L02-3		LAMP 170693-05-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH GUSTAFSON 								
FLU-5		LAMP 153464-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336						LMU4-1		LAMP 110235-02-CHT SCREW G11-08-16U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB PROGRESSIVE DYNAMICS 						LCS-1		LAMP 108354-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE ITC MARINE (SQUARE) 						LF1N3		LAMP 170693-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH GUSTAFSON 								
FLU-6		LAMP 130338-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT WARM WHITE BULB W/SWITCH THIN-LITE 						LMU4-2		LAMP 138116-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 						READ-1		LIGHT-READING 132427-01-CHT SCREW SUPPLIED W/ LIGHT CLIP-U 141395-02-CHT (2) CONNECTOR 58028-01-000 (2)				LIGHT-READING,SWIVEL,ROUND 1 BULB 						LFSN3		LAMP 170693-06-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH GUSTAFSON 								
FLU-7		LAMP 153464-05-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336						LMU4-3		LAMP 162446-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 						READ-2		LIGHT-READING 128786-02-CHT SCREW G11-08-16J (2) BULB 123917-01-000 CONNECTOR 58028-01-000 (2)				LIGHT,READING,SWIVEL 						LOS N3		LAMP 170693-07-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 2 BULB W/O SWITCH GUSTAFSON 								
FLU-8		LAMP 173072-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" ONE 8 WATT BULB W/SWITCH OPTRONICS 						LMM4-2		LAMP 123774-01-CHT SCREW G11-08-16U (2) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 4 BULB GUSTOFSON 						READ-3		LIGHT-READING 170833-01-CHT SCREW SUPPLIED W/LIGHT CONNECTOR 58028-01-000 (2)				LIGHT,READING,HAL						LO1N3		LAMP 170693-08-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 1 BULB W/O SWITCH GUSTAFSON 								
FLUN1		LAMP 91936-04-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH THIN-LITE 																																												
FLUN2		LAMP 91936-03-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH THIN-LITE 																																												
FLUN3		LAMP 153464-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336																																												
FLUN4		LAMP 153464-03-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 480																																												
FLUN5		LAMP 153464-06-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 480																																												
FLUN6		LAMP 153464-04-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336																																												
</																																																		

87654321

DWG NO121339

ANTENNA ASM-PACKAGE

NO	PART NUMBER	DESCRIPTION
ANT-1	ANTENNA 76319-24-000 HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) CLIP 80734-02-000	ROOF MOUNT TV ANTENNA ASM 25.5" MAST 600 MAX COAX LENGTH
ANT-2	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA	ROOF MOUNT TV ANTENNA ASM 44.5" MAST 600 MAX COAX LENGTH
ANT-2W	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA WEDGE 76319-26-000	ROOF MOUNT TV ANTENNA ASM 44.5" MAST 600 MAX COAX LENGTH
ANTA-1	ANTENNA 158270-01-CHT BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-WINGMAN, ACCESSORY 173519-03-CHT	ROOF MOUNT TV ANTENNA ASM AUTOMATIC 600 MAX COAX LENGTH
ANT-3	ANTENNA-TV ROOF MNT.ROUND 167632-01-CHT PLATE-ROOF, CABLE ENTRY 146488-01-000 SCREW G67-10-129 (10) CABLE ASM-COAX 87105-01-006 ADAPTER 82134-01-000	ROOF MOUNT OMNI- DIRECTIONAL ANTENNA MOUNTING SCREWS SUPPLIED WITH ANTENNA 600 MAX COAX LENGTH
ANT-4	ANTENNA 173519-01-CHT HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-HANDLE EXTENSION 173519-02-CHT	ROOF MOUNT TV ANTENNA ASM 44.5" MAST 600 MAX COAX LENGTH

ANTENNA ASM-PACKAGE

ANTEXT-1	CABLE ASM-EXTENS 77069-02-000	RADIO ANTENNA CABLE EXTENSION 2400MM USABLE LENGTH
ANTKIT-1	ADAPTER-PLATE 76319-06-000 SCREW G11-08-08T (6) CLIP-WIRE 80734-02-000 SCREW G11-08-08T	PLATE ASM-ADAPTERS CABLE ROOF MOUNTING PLATE W/ CABLE-CABLE ADAPTER, FITTINGS, AND CABLE RETAINING CLIP
ANT-R	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT ANTENNA 109889-04-000 BRACKET-ANTENNA GROUND 147741-01-CHT	ROOF MOUNT RADIO ANTENNA
ANTEXT-2	CABLE ASM-EXTENS 77069-03-000	RADIO ANTENNA CABLE EXTENSION 6600 MM USABLE LENGTH
ANT-A	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT 76 MM 171825-01-000 (2) BRACKET-GROUND 147741-01-CHT NUT OMD01K-06-000 (2)	ROOF MOUNT RADIO ANTENNA THICK ROOF

SATELLITE DISH INSTL

DA-2	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP
DI-2	SATELLITE DISH 154474-04-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP
DM-2	SATELLITE DISH 137135-05-000 PLATE-ROOF,ENTRY (SUPPLIED WITH SATELLITE DISH) SCREW G67-10-12U (8) (FOR ROOF PLATE) SCREW G67-10-12U (10) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM MANUAL SETUP

SENSORS

NO	PART NUMBER	DESCRIPTION
LPGD	LP GAS DETECTOR 150138-03-CHT SCREW G68-06-10U (2)	DETECTOR-LP GAS

PANELS

NO	PART NUMBER	DESCRIPTION
SOLAR	PANEL-SOLAR 10 WATT 151647-01-000 (UP TO 03-14-10) 176161-01-000 (AFTER 03-15-10) SCREW G11-08-12U (4)	SOLAR PANEL

LEGEND

PART NUMBER

QUANTITY

PART NUMBER

QUANTITY

1

ADD BUMPER TO BOTTOM SIDE OF ANTENNA WINGS TO PREVENT DAMAGE TO ROOF.

87654321

96 MH'S

DO NOT SCALE DRAWING

PART LISTING-ELECTRICAL

SHEET 5

PART NO121339



REV

2/17/2010



87654321

DWG NO121339






RECEPTACLE PACKAGE-GFI

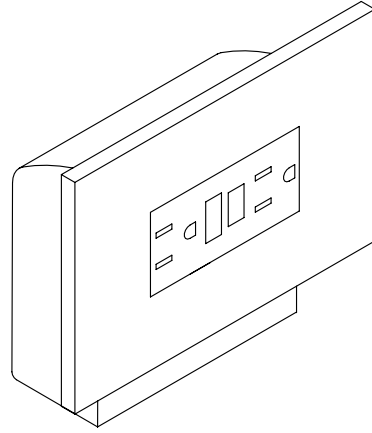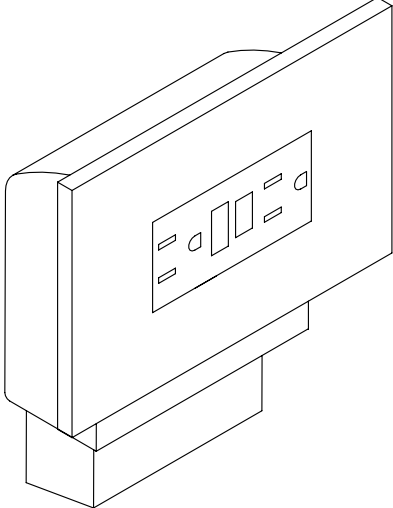NO	PART NUMBER	DESCRIPTION
<u>GFI</u> US	RECEPTACLE 163319-01-CHT BOX 91910-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI</u> CAN	RECEPTACLE 163319-01-CHT BOX 91910-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

RECEPTACLE PACKAGE-GFI

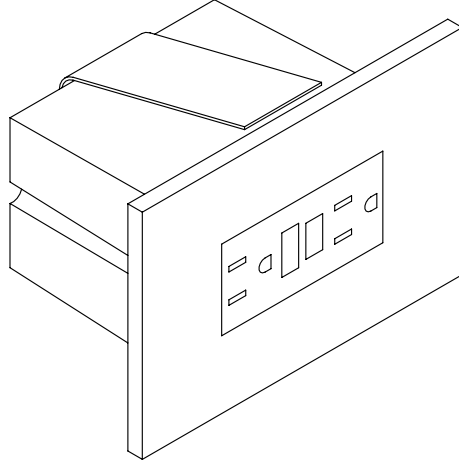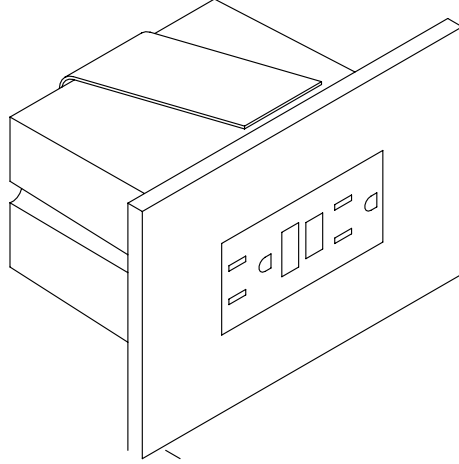
NO	PART NUMBER	DESCRIPTION
<u>GFI-1</u> US	RECEPTACLE 163319-01-CHT BOX 133070-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI-1</u> CAN	RECEPTACLE 163319-01-CHT BOX 133070-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

SPACERS

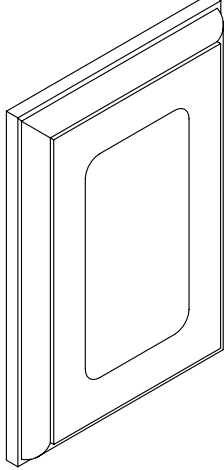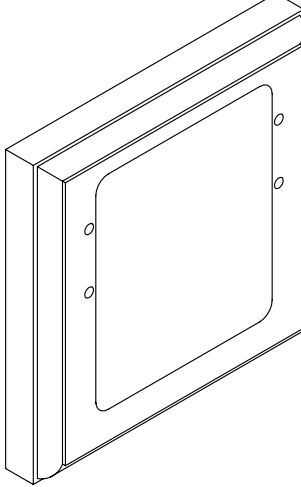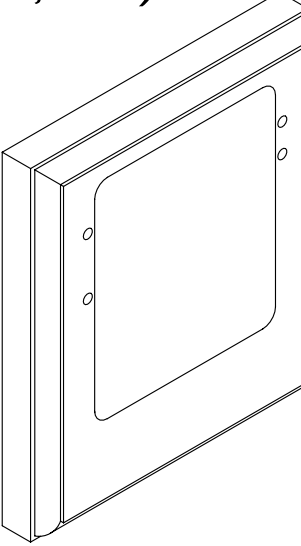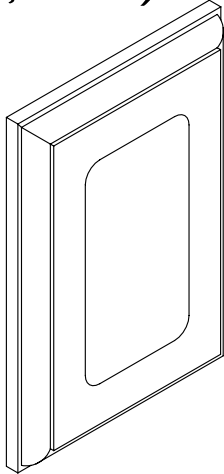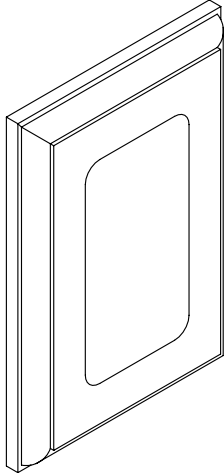NO	PART NUMBER	DESCRIPTION
SP-01	SPACER 102568-01-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,OG) 
SP-02	SPACER 102568-02-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (US) (WOOD,VYL RAP,OG) 
SP-03	SPACER 102568-03-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (CANADA) (WOOD,VYL RAP,OG) 
SP-04	SPACER 133713-01-CHT	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,BEV) 
SP-05	SPACER 133713-20-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,BEV) 

SP-21

SPACER
126052-01-XXX

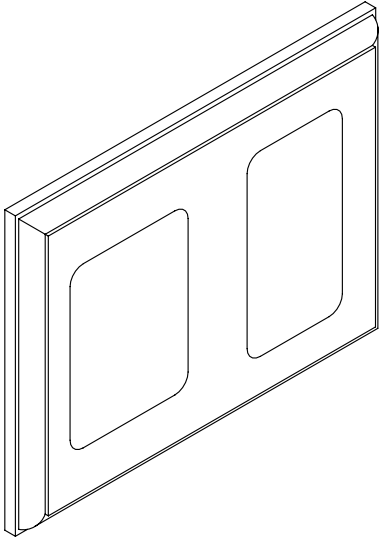WOOD SPACER FOR 1 - 110V
RECEPTACLE AND 1 - REAR TV
(12V) JACK
(WOOD,BEV)


LEGEND

MISC.	SPACER
PART NUMBER LISTING XXXX XXX	XXXX PART NUMBER

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:
PART LISTING-ELECTRICAL

SHEET 6

PART NO121339

REV

NOTES:

1

APPLY TUBING TO BARE GROUND WIRES.

87654321



2/17/2010

87654321

121339


DWG NO

PREP-A/C, RECESSED (W/OUT FACTORY A/C)

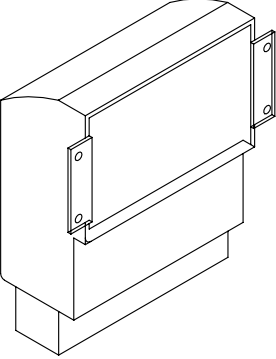
NO	PART NUMBER	DESCRIPTION
PREP A/C-US	BOX 91910-02-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). US APPLICATION (RECESSED IN ROOF) 
PREP A/C-CAN	BOX 91910-01-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). CANADA APPLICATION (RECESSED IN ROOF) 

CONNECTION BOX, GENERATOR SERVICE FEED

NO	PART NUMBER	DESCRIPTION
J-GEN 30	BOX 8289-01-000 COVER	BOX AND EQUIPMENT USED FOR CONNECTING THE GENERATOR LEADS TO THE SERVICE ENTRANCE WIRES (US & CA APPLICATION)
J-GEN 30-US	8294-01-000 SCREW G67-10-10B (2)	
J-GEN 30-CA	WIRE ASM-GROUND 133678-02-000 WIRE NUT-GREY 8314-01-000 (3) CONNECTOR-WIRE 8356-01-000	

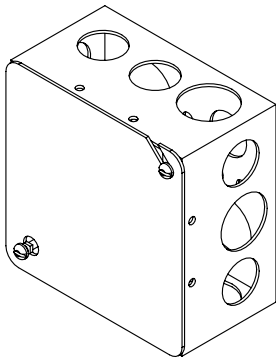


PREP-A/C, SURFACE (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP SURF	BOX 93603-01-000 COVER 53337-01-000 LABEL 91243-01-000 WIRE-BONDING 8019-01-000 SCREW G11-08-12B (2) TERMINAL 8328-01-000 CONNECTOR 8313-01-000 (2) CONNECTOR 8311-01-000	SURFACE MOUNT, US AND CANADA, BOX AND EQUIPMENT FOR A/C PREP (W/OUT FACTORY A/C). TYPICALLY LOCATED ON OVERHEAD CABINET INNER WALL OR ON CEILING. 


CONNECTION BOX-POWER CORD

NO	PART NUMBER	DESCRIPTION
J-PC 30	BOX 8289-01-000 COVER	CONNECTION BOX IN POWER CORD COMPT FOR POWER CORD (US & CA APPLICATION)
J-PC 30-US	8294-01-000 SCREW G67-10-10B (2)	
J-PC 30-CA	WIRE ASM-GROUND 133678-02-000 CONNECTOR 8314-01-000 (3) CONNECTOR 8356-02-000 CONNECTOR (PC) 8355-01-000	

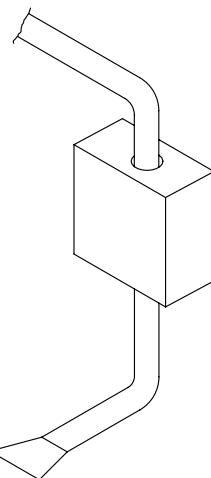

CONNECTION BOX-GENERATOR RECEPTACLE

NO	PART NUMBER	DESCRIPTION
J-RCP 30	BOX 8289-01-000 RECEPTACLE	CONNECTION BOX IN POWER CORD COMPT FOR THE GENERATOR RECEPTACLE (US & CA APPLICATION)
J-RCP 30-US	24924-02-000 COVER 69238-01-000 SCREW G67-10-10B (2)	
J-RCP 30-CA	WIRE ASM-GROUND 133678-02-000 133678-04-000 CONNECTOR 8314-01-000 TUBING-VINYL 8041-02-000 (150MM)	

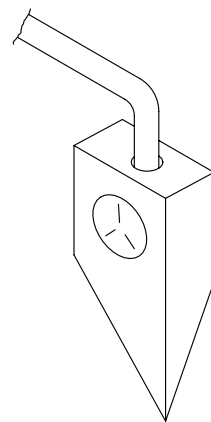

1

APPLY TUBING TO BARE GROUND WIRES.

LEGEND

PART
NUMBER

LISTING

XXXX

XX

NOTES:

1

96 MH'S

DO NOT SCALE DRAWING

TITLE:
PART LISTING-ELECTRICAL

SHEET 7



PART NO
121339

REV

87654321

1

2/17/2010

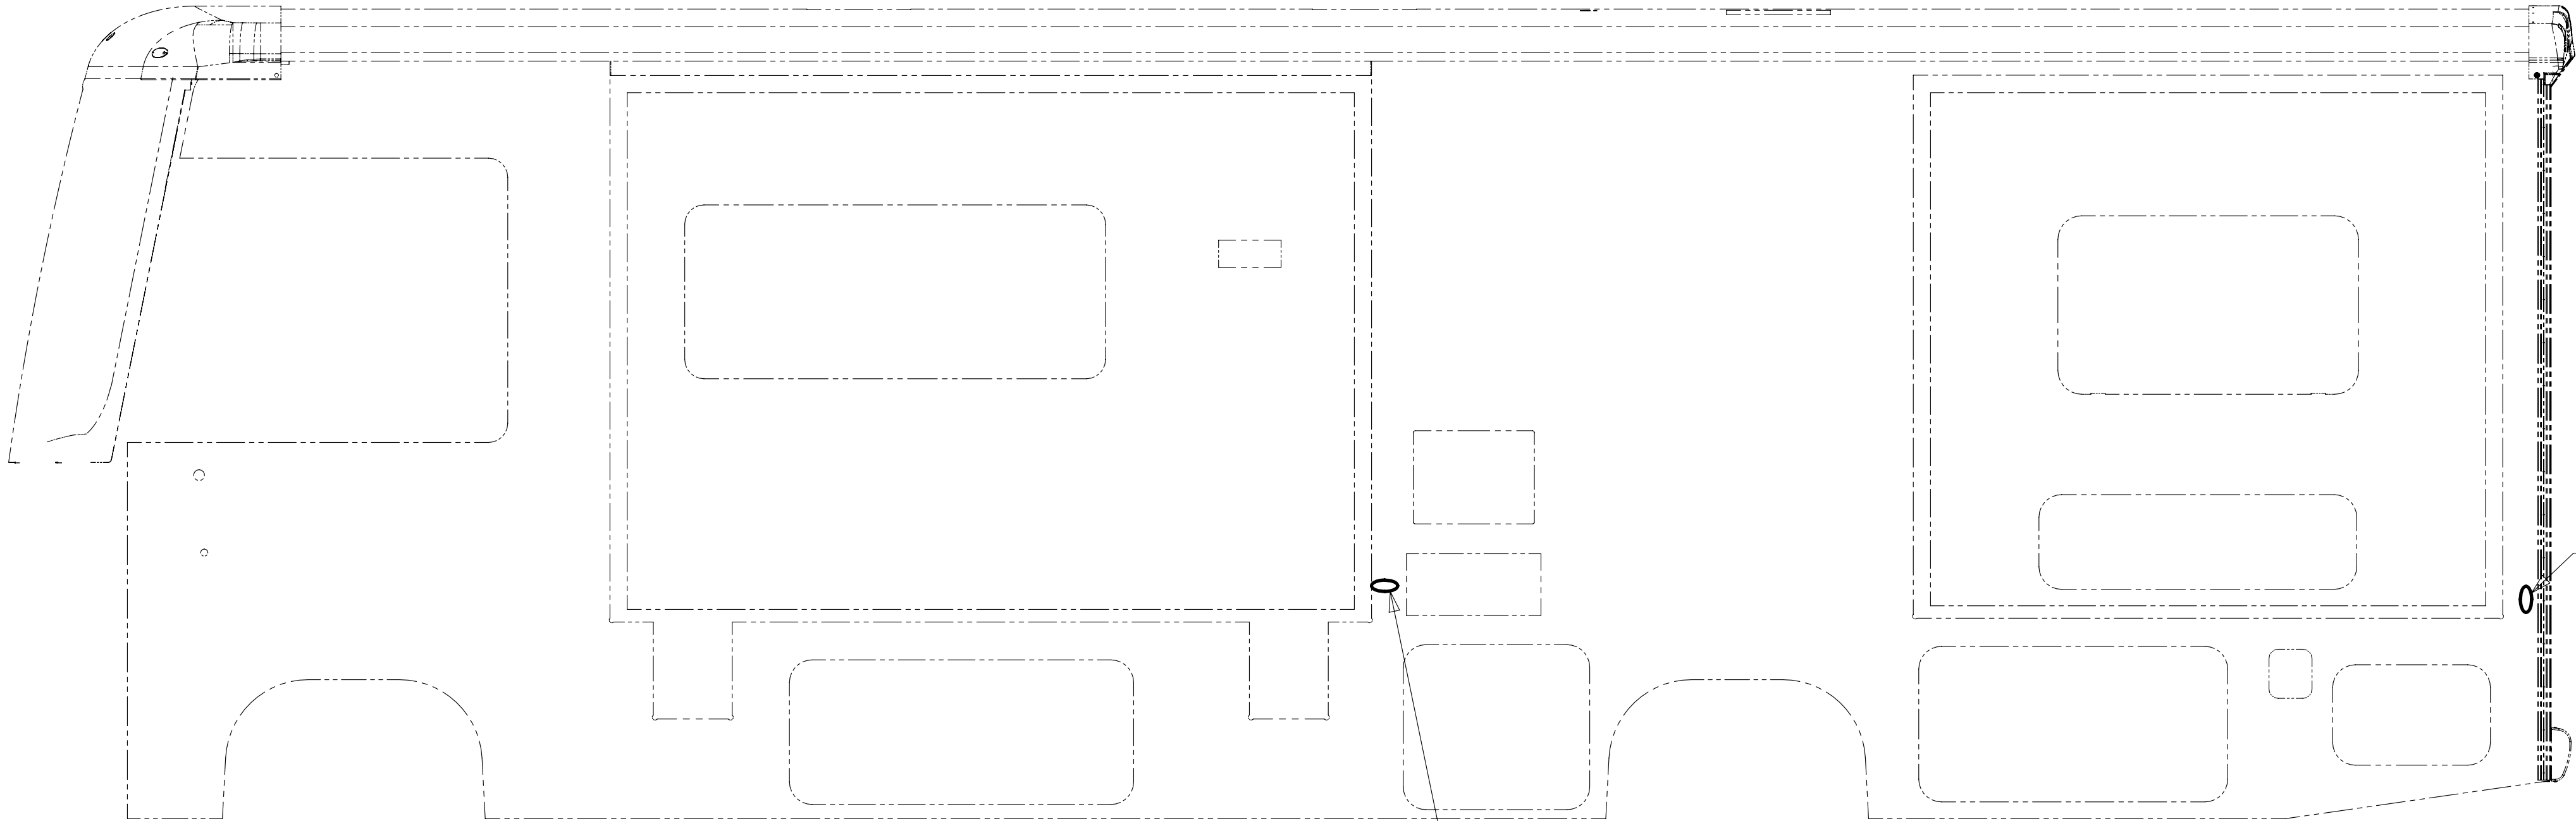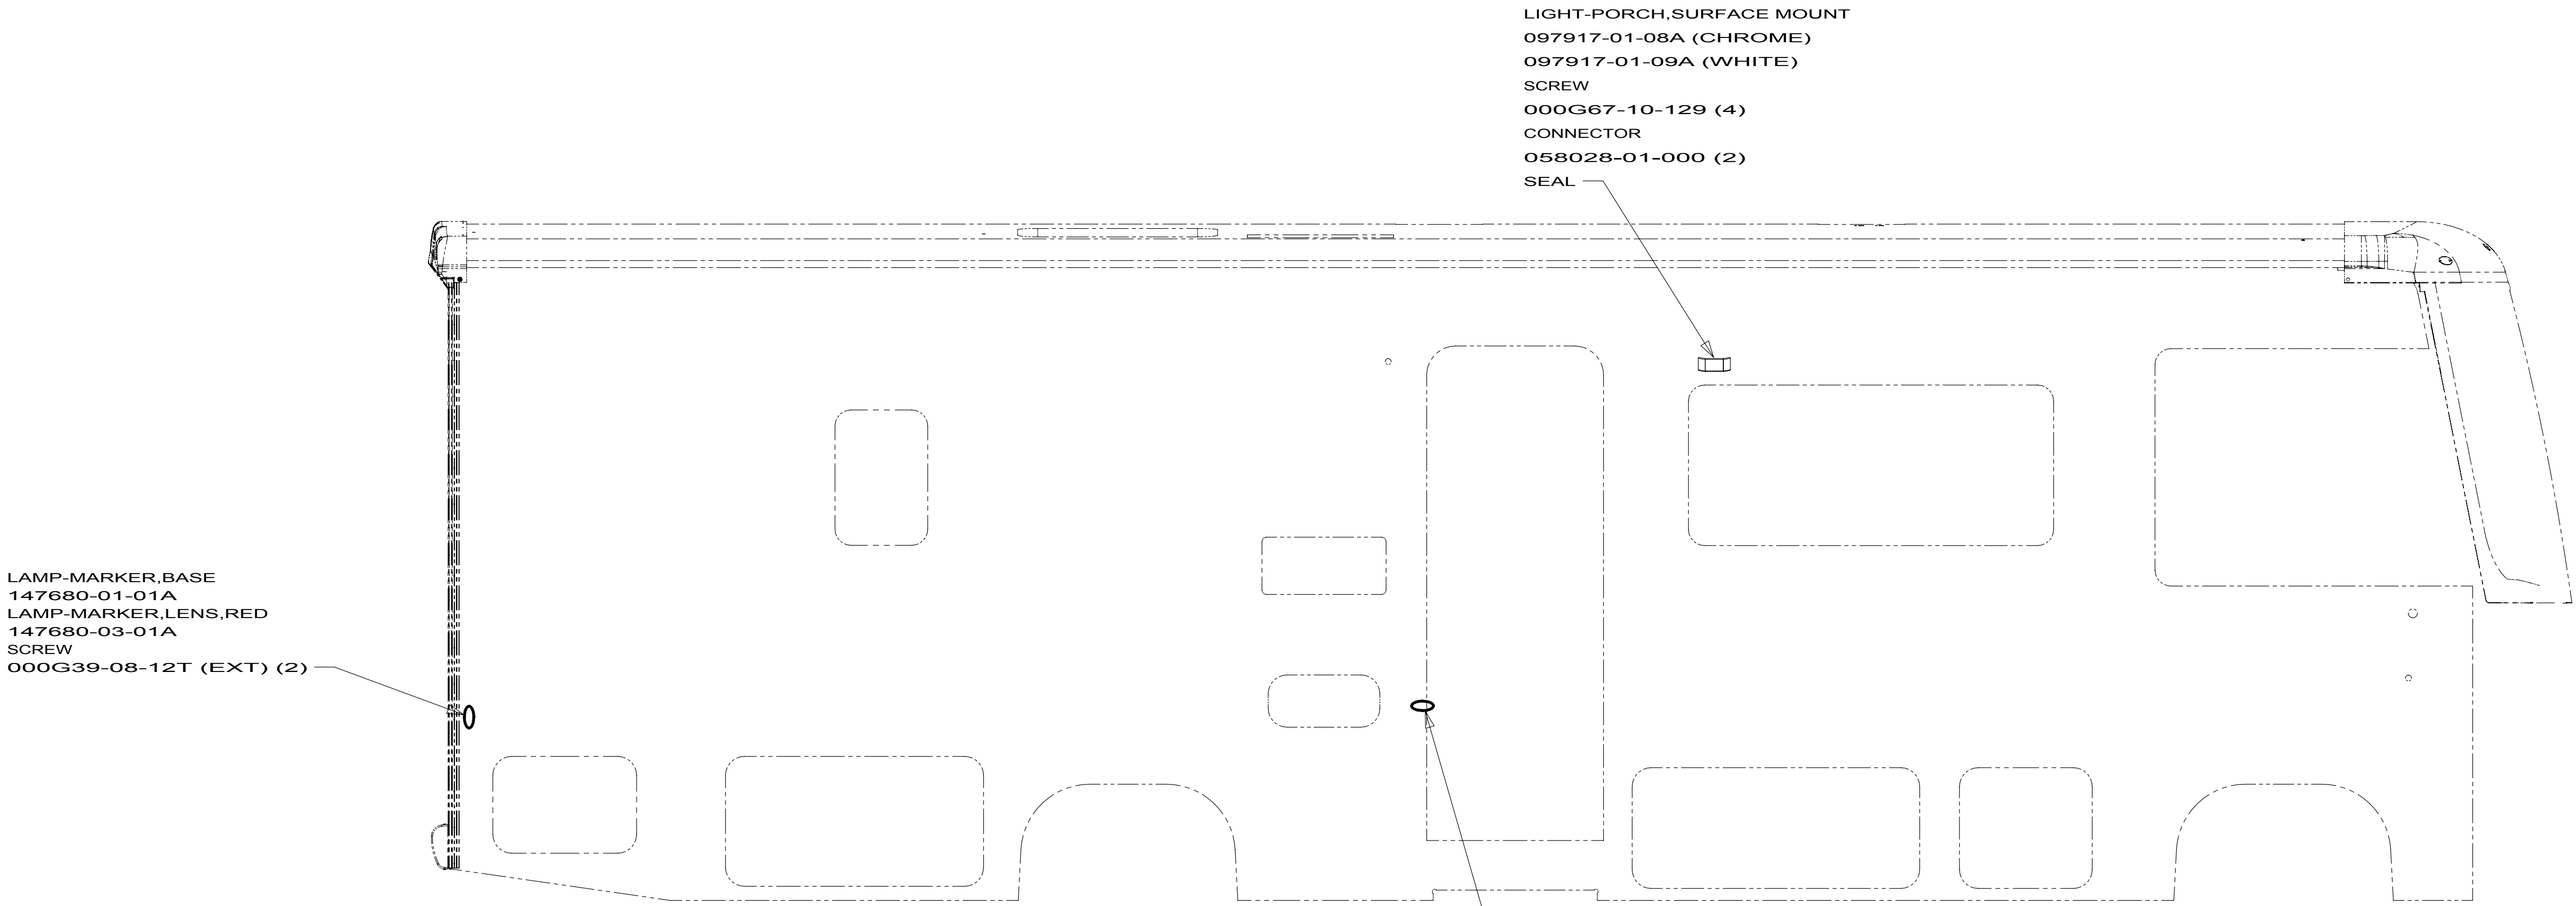

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS-USA

1B1 265

10 E-SERIES


1 NOT USED ON E26P, E29R.

NOTES:

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

WIRING INSTL-EXTERIOR LAMPS 1 2 171500

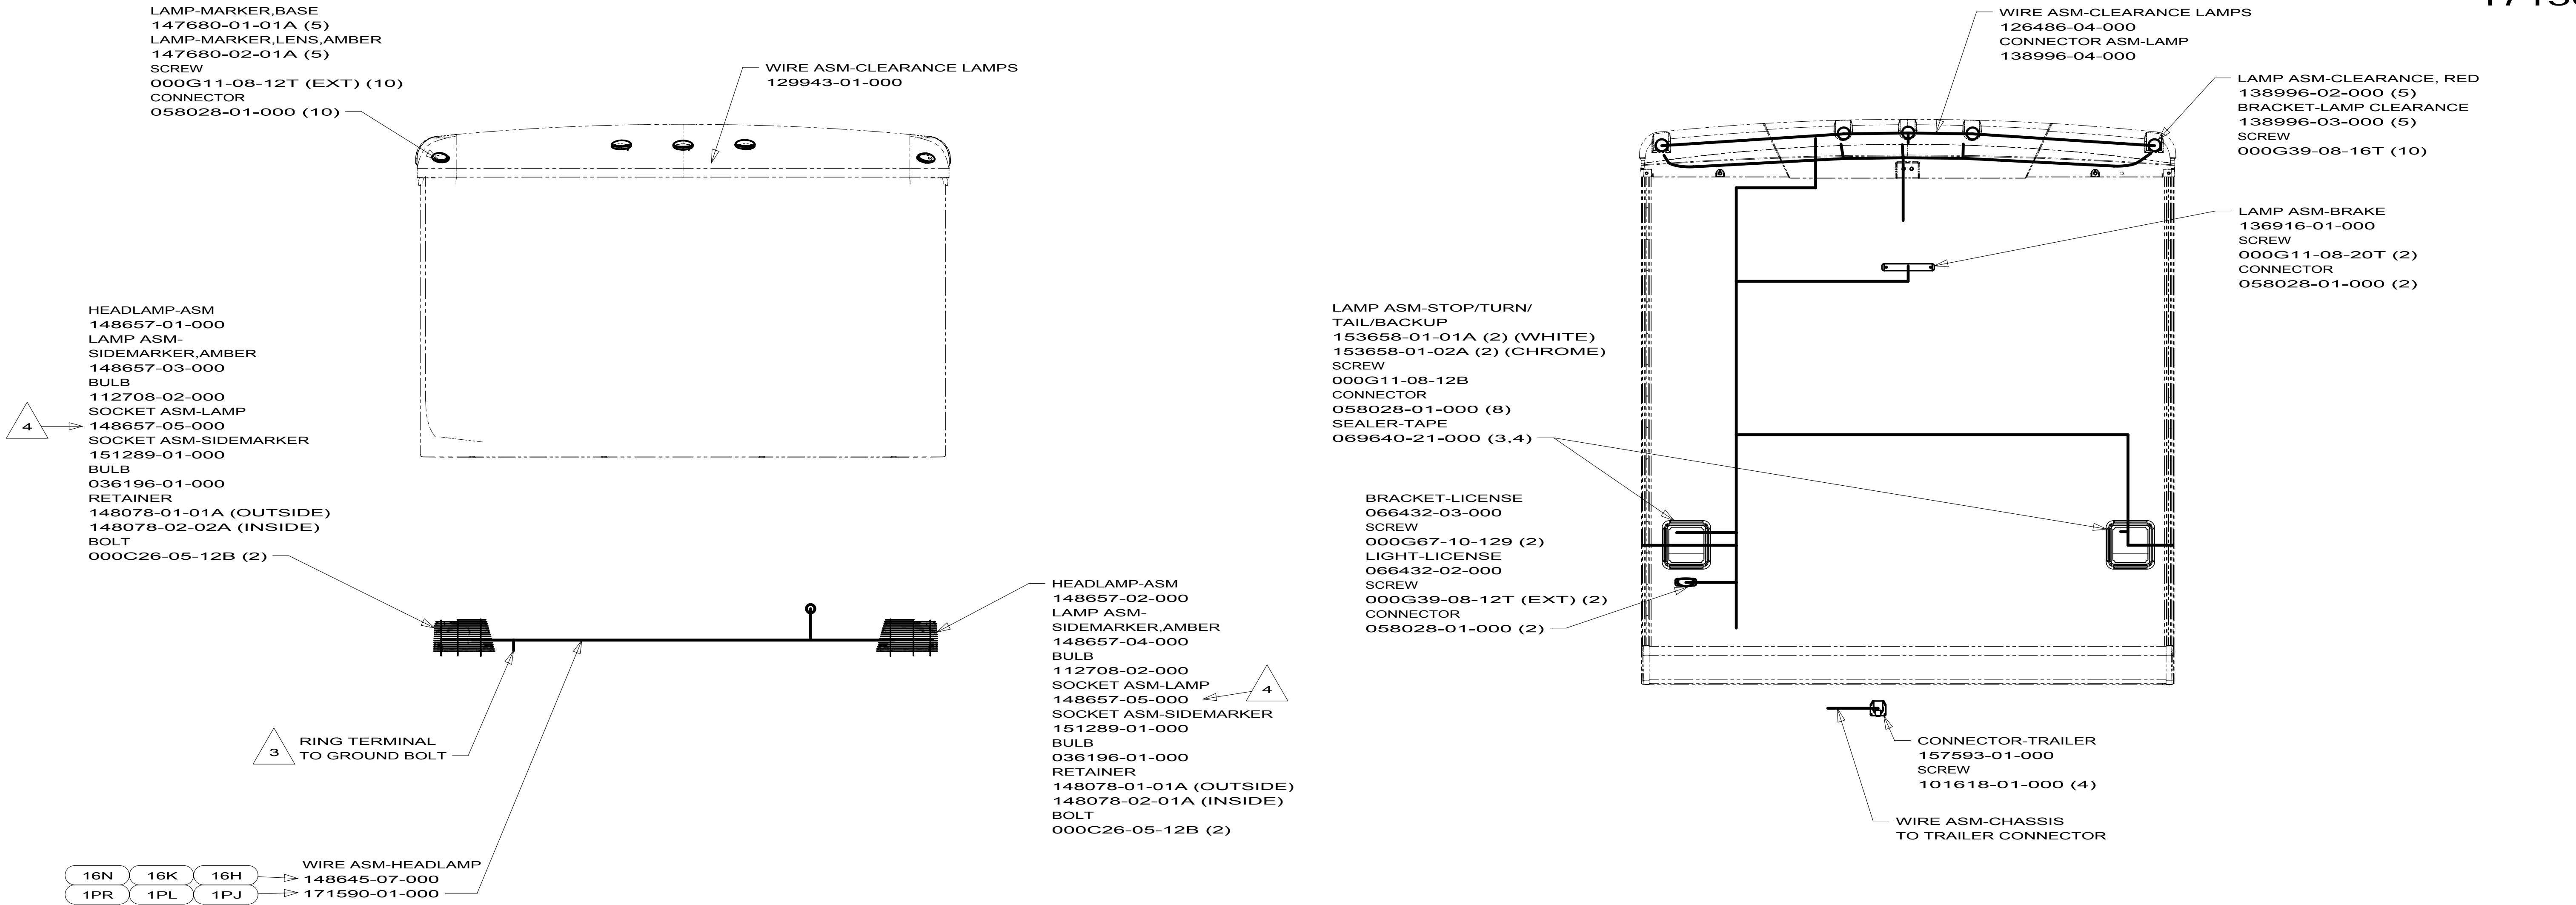

- 4 NOTE! SOCKET BODY ON THE 148657-05-000 IS LONGER THAN 112709-04-000, DO NOT MIX!
- 3 CLEAN PAINT OFF METAL (BOLT) BEFORE CONNECTING GROUND TO INSURE CONTACT. ALSO MOUNT CHASSIS SUPPLIED HORN TO GROUND BOLT.
2. CONNECTOR-PLUG, TRAILER 146246-01-000 TO BE SUPPLIED LOOSE IN OWNERS PACKET WITH TRAILER TOW PACKAGE.
1. GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS AND BUNDLE AND SECURE WITH TIE-WIRE 008343-01-000 OR 093147-01-000.

NOTES:

- 1PL WORKHORSE 18,000# GVWR (W18)
- 1PJ WORKHORSE 16,000# GVWR (W16)
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 16N FORD CHASSIS-16,000 LB. GVWR
- 16K FORD CHASSIS 22,000
- 16H FORD CHASSIS 18,000#/V10 ENG
- 240 TRAILER HITCH
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

10 E-SERIES

WIRING INSTL-EXTERIOR LAMPS

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X



FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

KEY	PART NUMBER	U/M	DESCRIPTION
	097917-01-700	EA	LENS-LIGHT, CLEAR

097917-01-08A/09A
VENDOR NO.
30-78-021

KEY	PART NUMBER	U/M	DESCRIPTION
	153658-01-700	EA	LENS ONLY

153658-01-01A, 153658-01-02A
VENDOR NO.
8511LRC

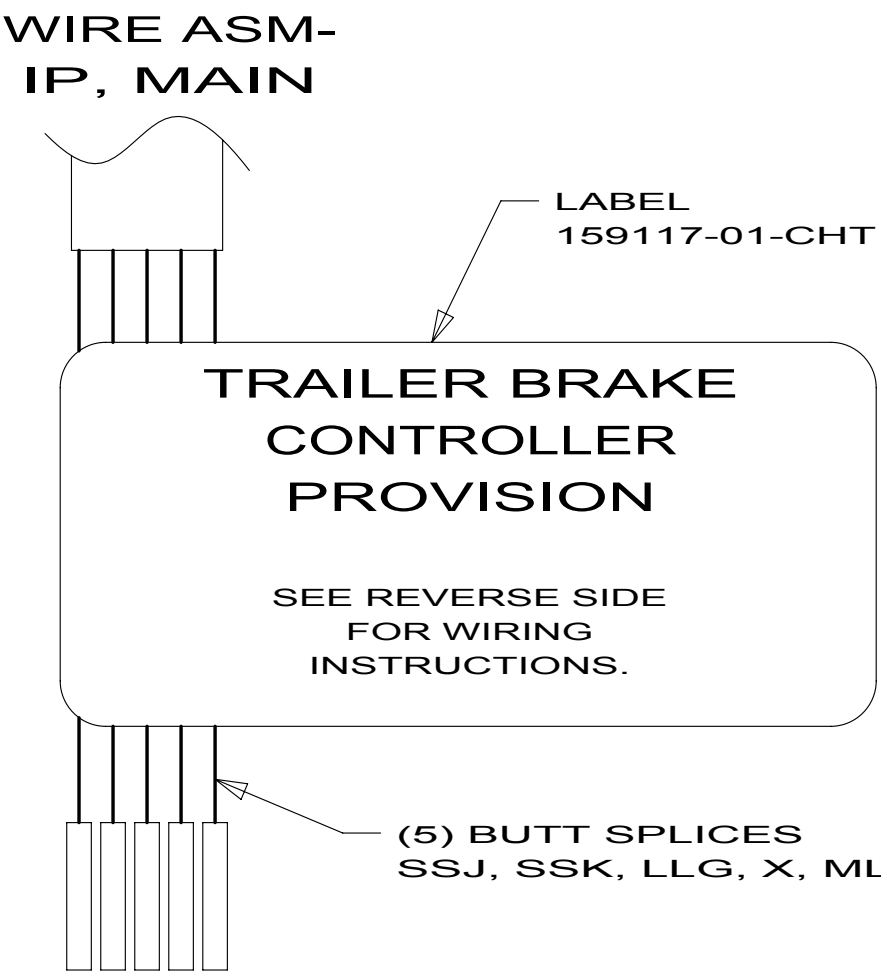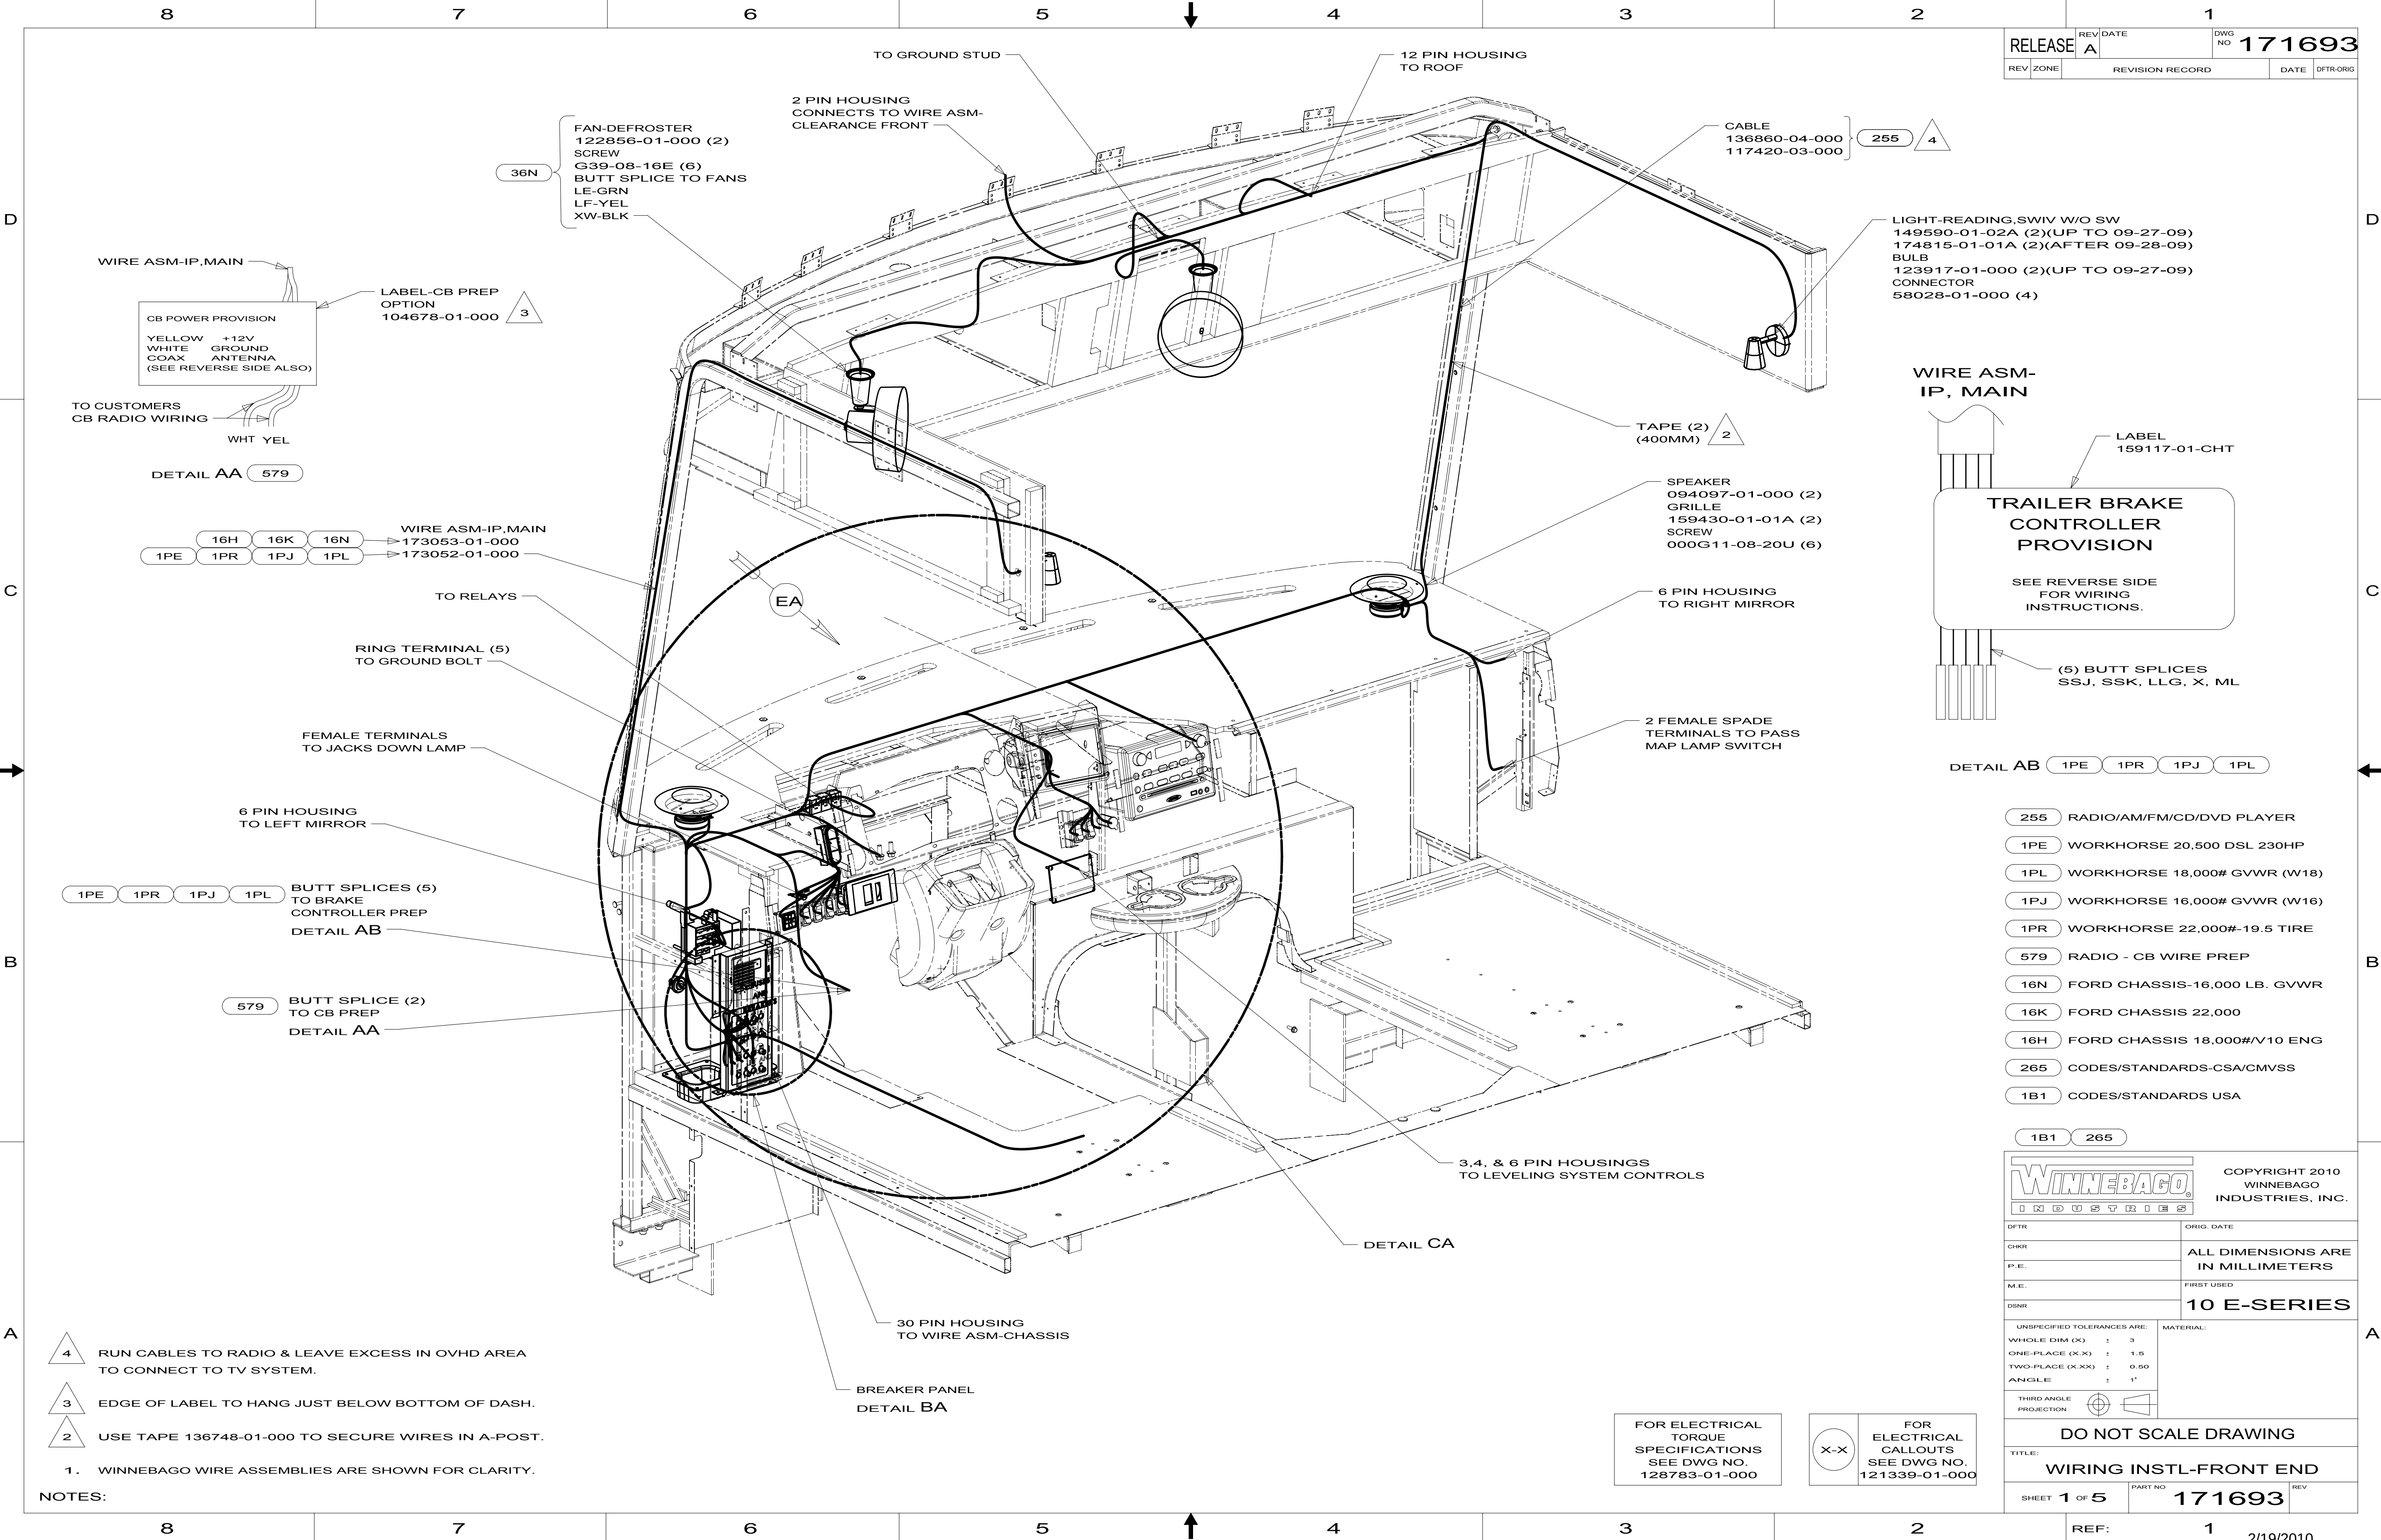

DETAIL AB 1PE 1PR 1PJ 1PL

- 255 RADIO/AM/FM/CD/DVD PLAYER
- 1PE WORKHORSE 20,500 DSL 230HP
- 1PL WORKHORSE 18,000# GVWR (W18)
- 1PJ WORKHORSE 16,000# GVWR (W16)
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 579 RADIO - CB WIRE PREP
- 16N FORD CHASSIS-16,000 LB. GVWR
- 16K FORD CHASSIS 22,000
- 16H FORD CHASSIS 18,000#/V10 ENG
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

WINNEBAGO INDUSTRIES		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFT-ORIG	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHKR			
P.E.			
M.E.	FIRST USED		
DSNR		10 E-SERIES	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-FRONT END	
SHEET 1 OF 5	PART NO 171693
REF:	1

- 4 RUN CABLES TO RADIO & LEAVE EXCESS IN OVHD AREA TO CONNECT TO TV SYSTEM.
- 3 EDGE OF LABEL TO HANG JUST BELOW BOTTOM OF DASH.
- 2 USE TAPE 136748-01-000 TO SECURE WIRES IN A-POST.

NOTES:
1. WINNEBAGO WIRE ASSEMBLIES ARE SHOWN FOR CLARITY.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
--	---

D

C

B





A

D

C

B

A

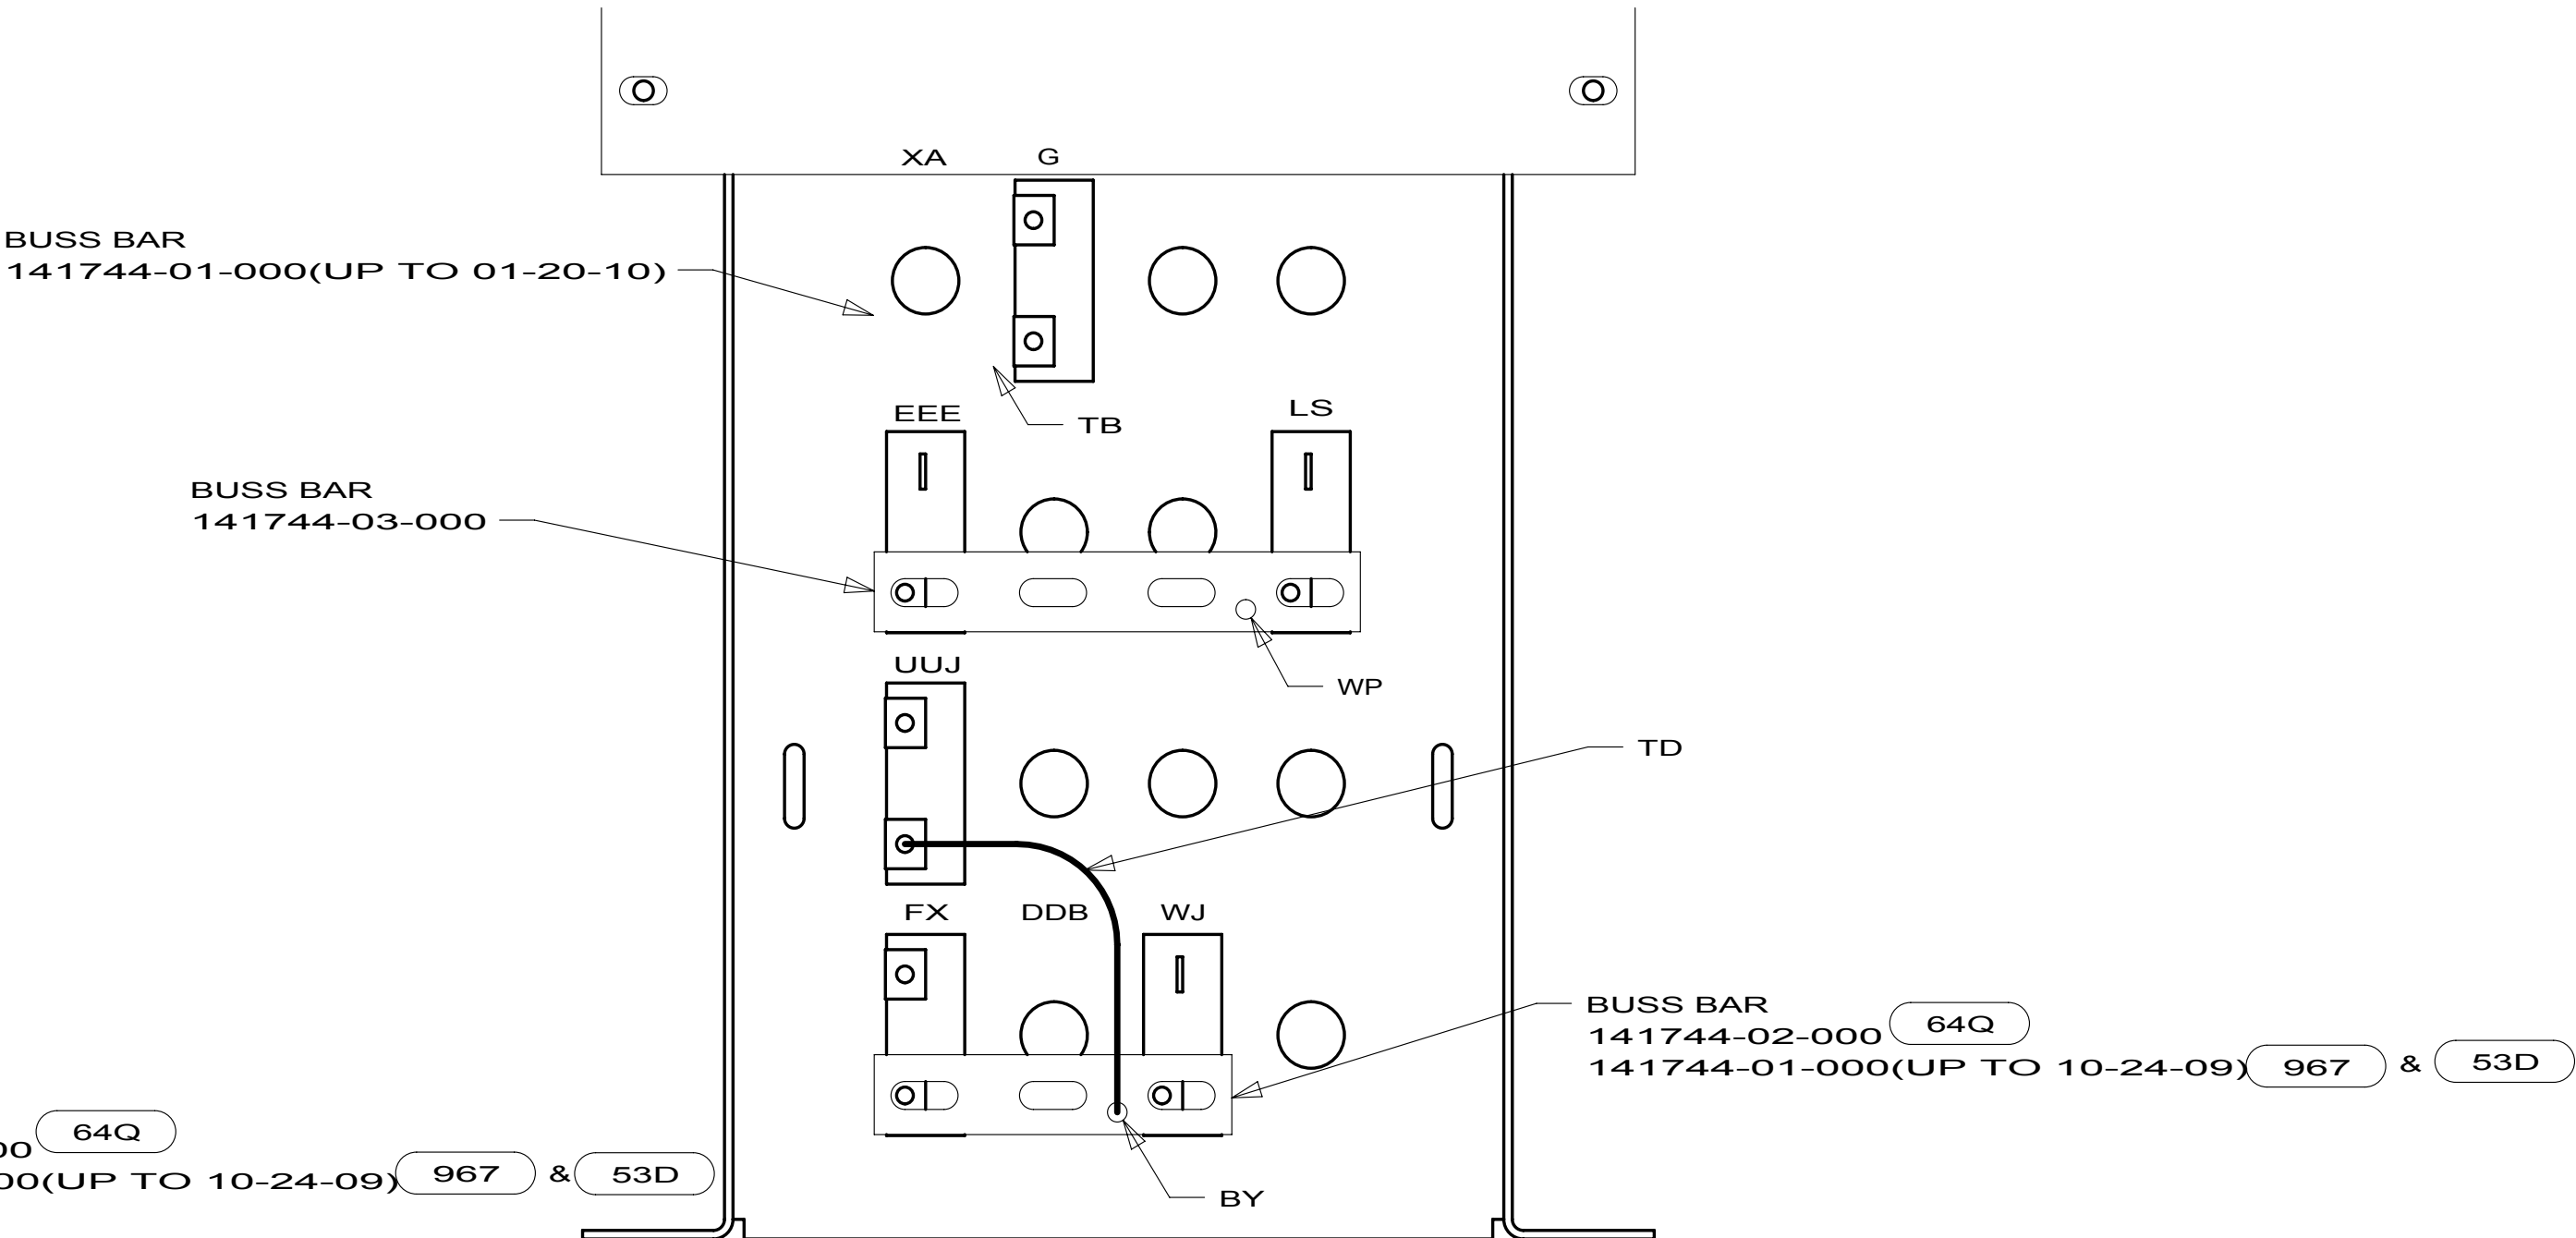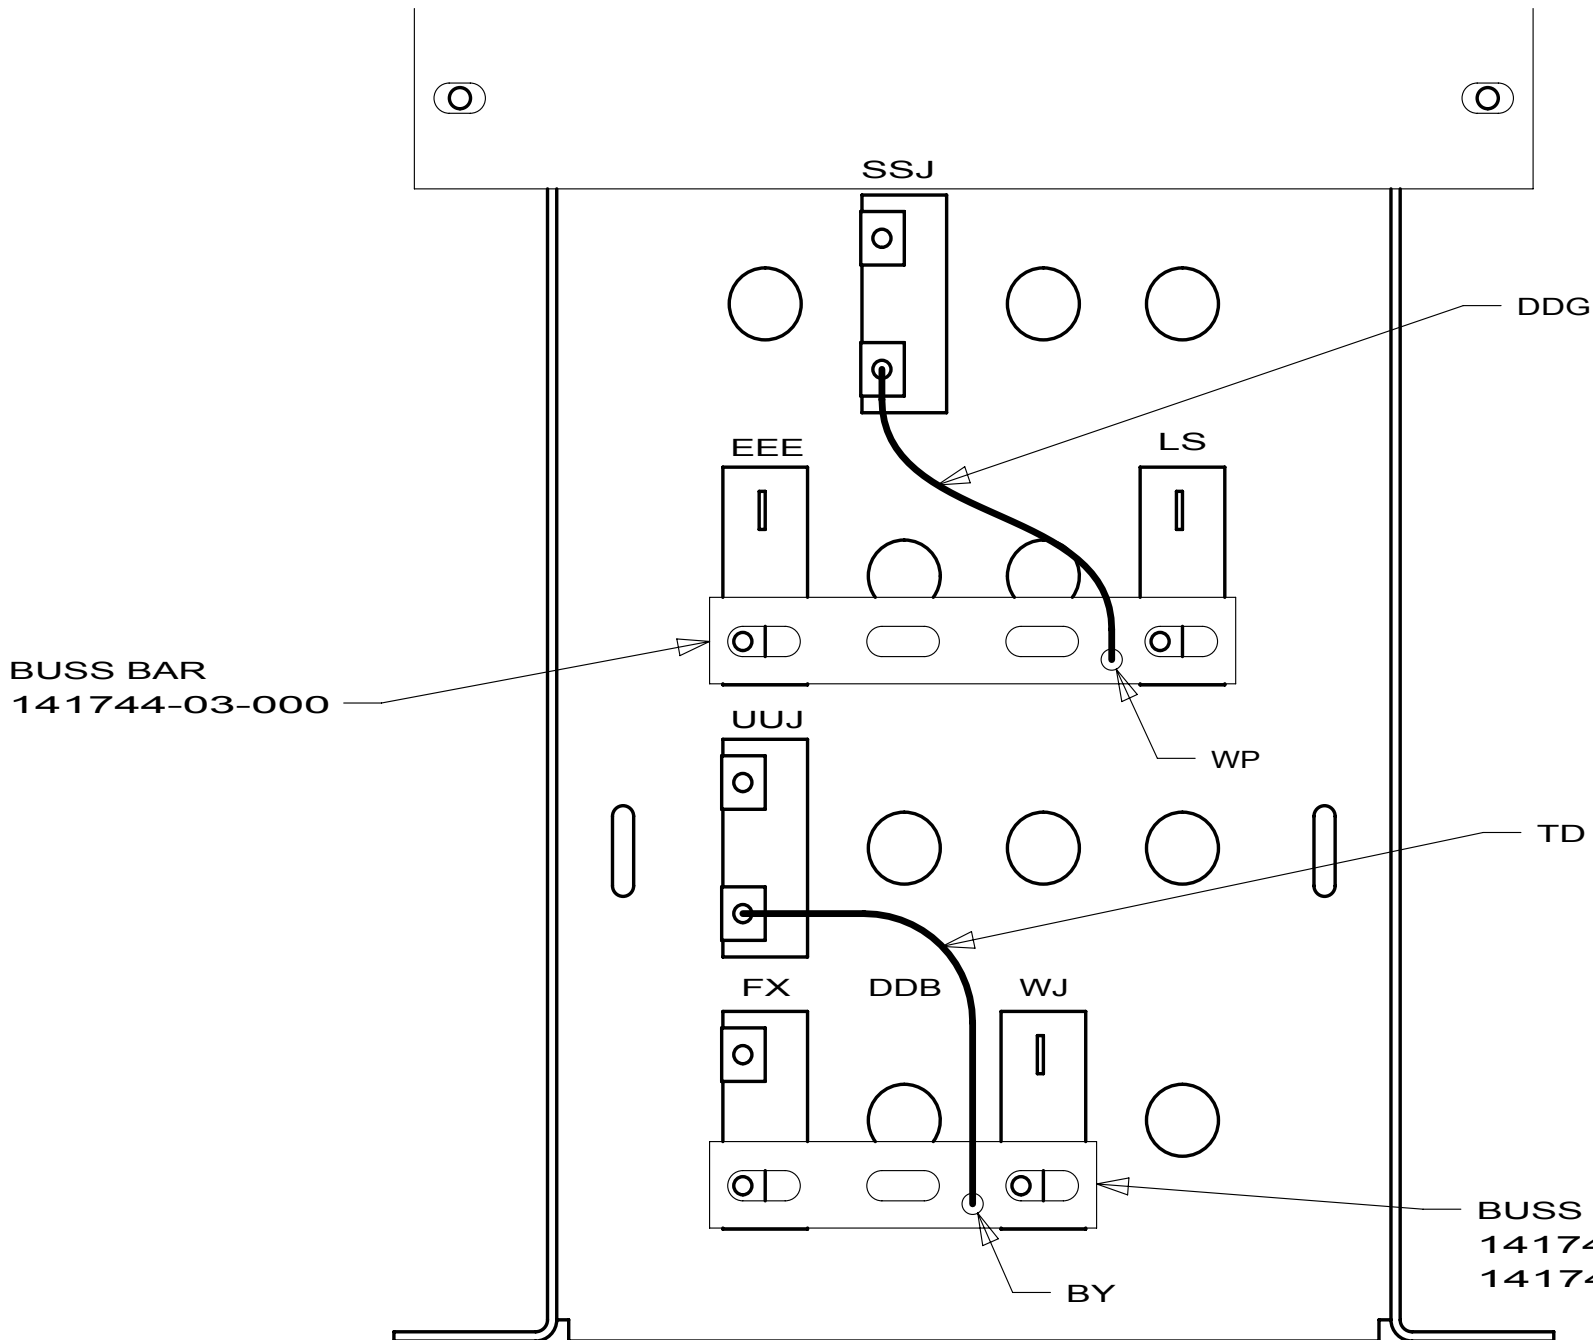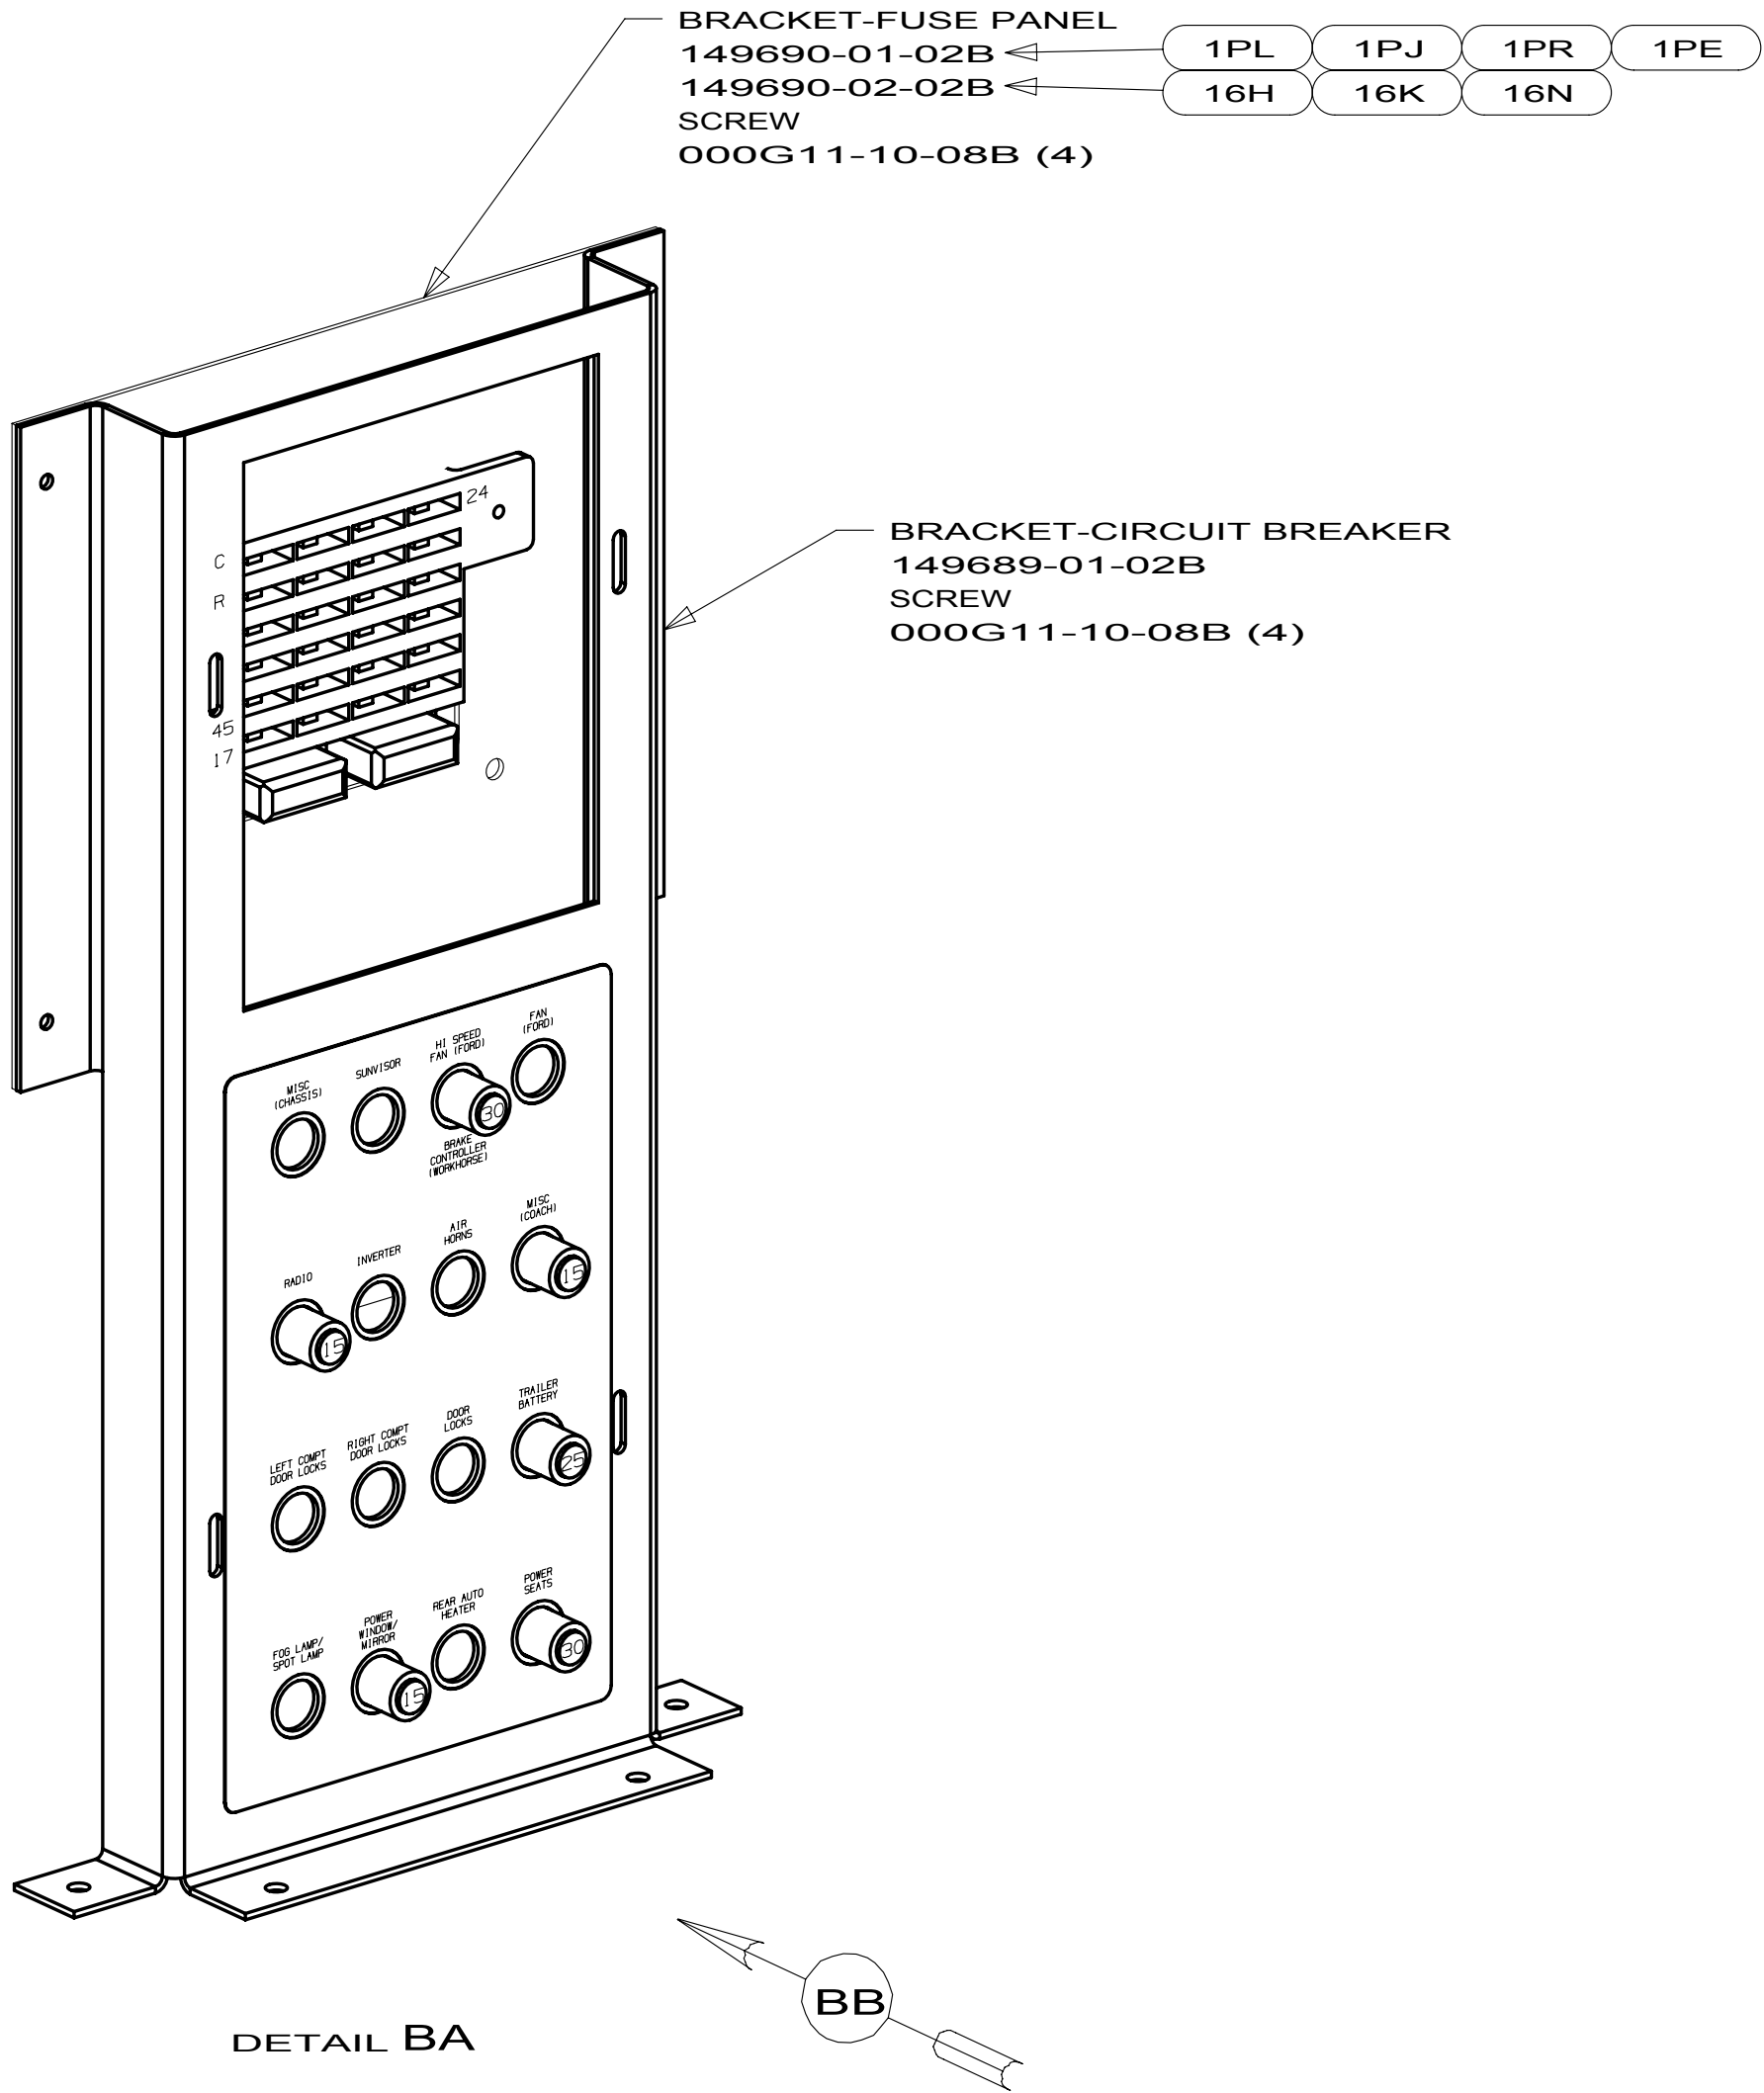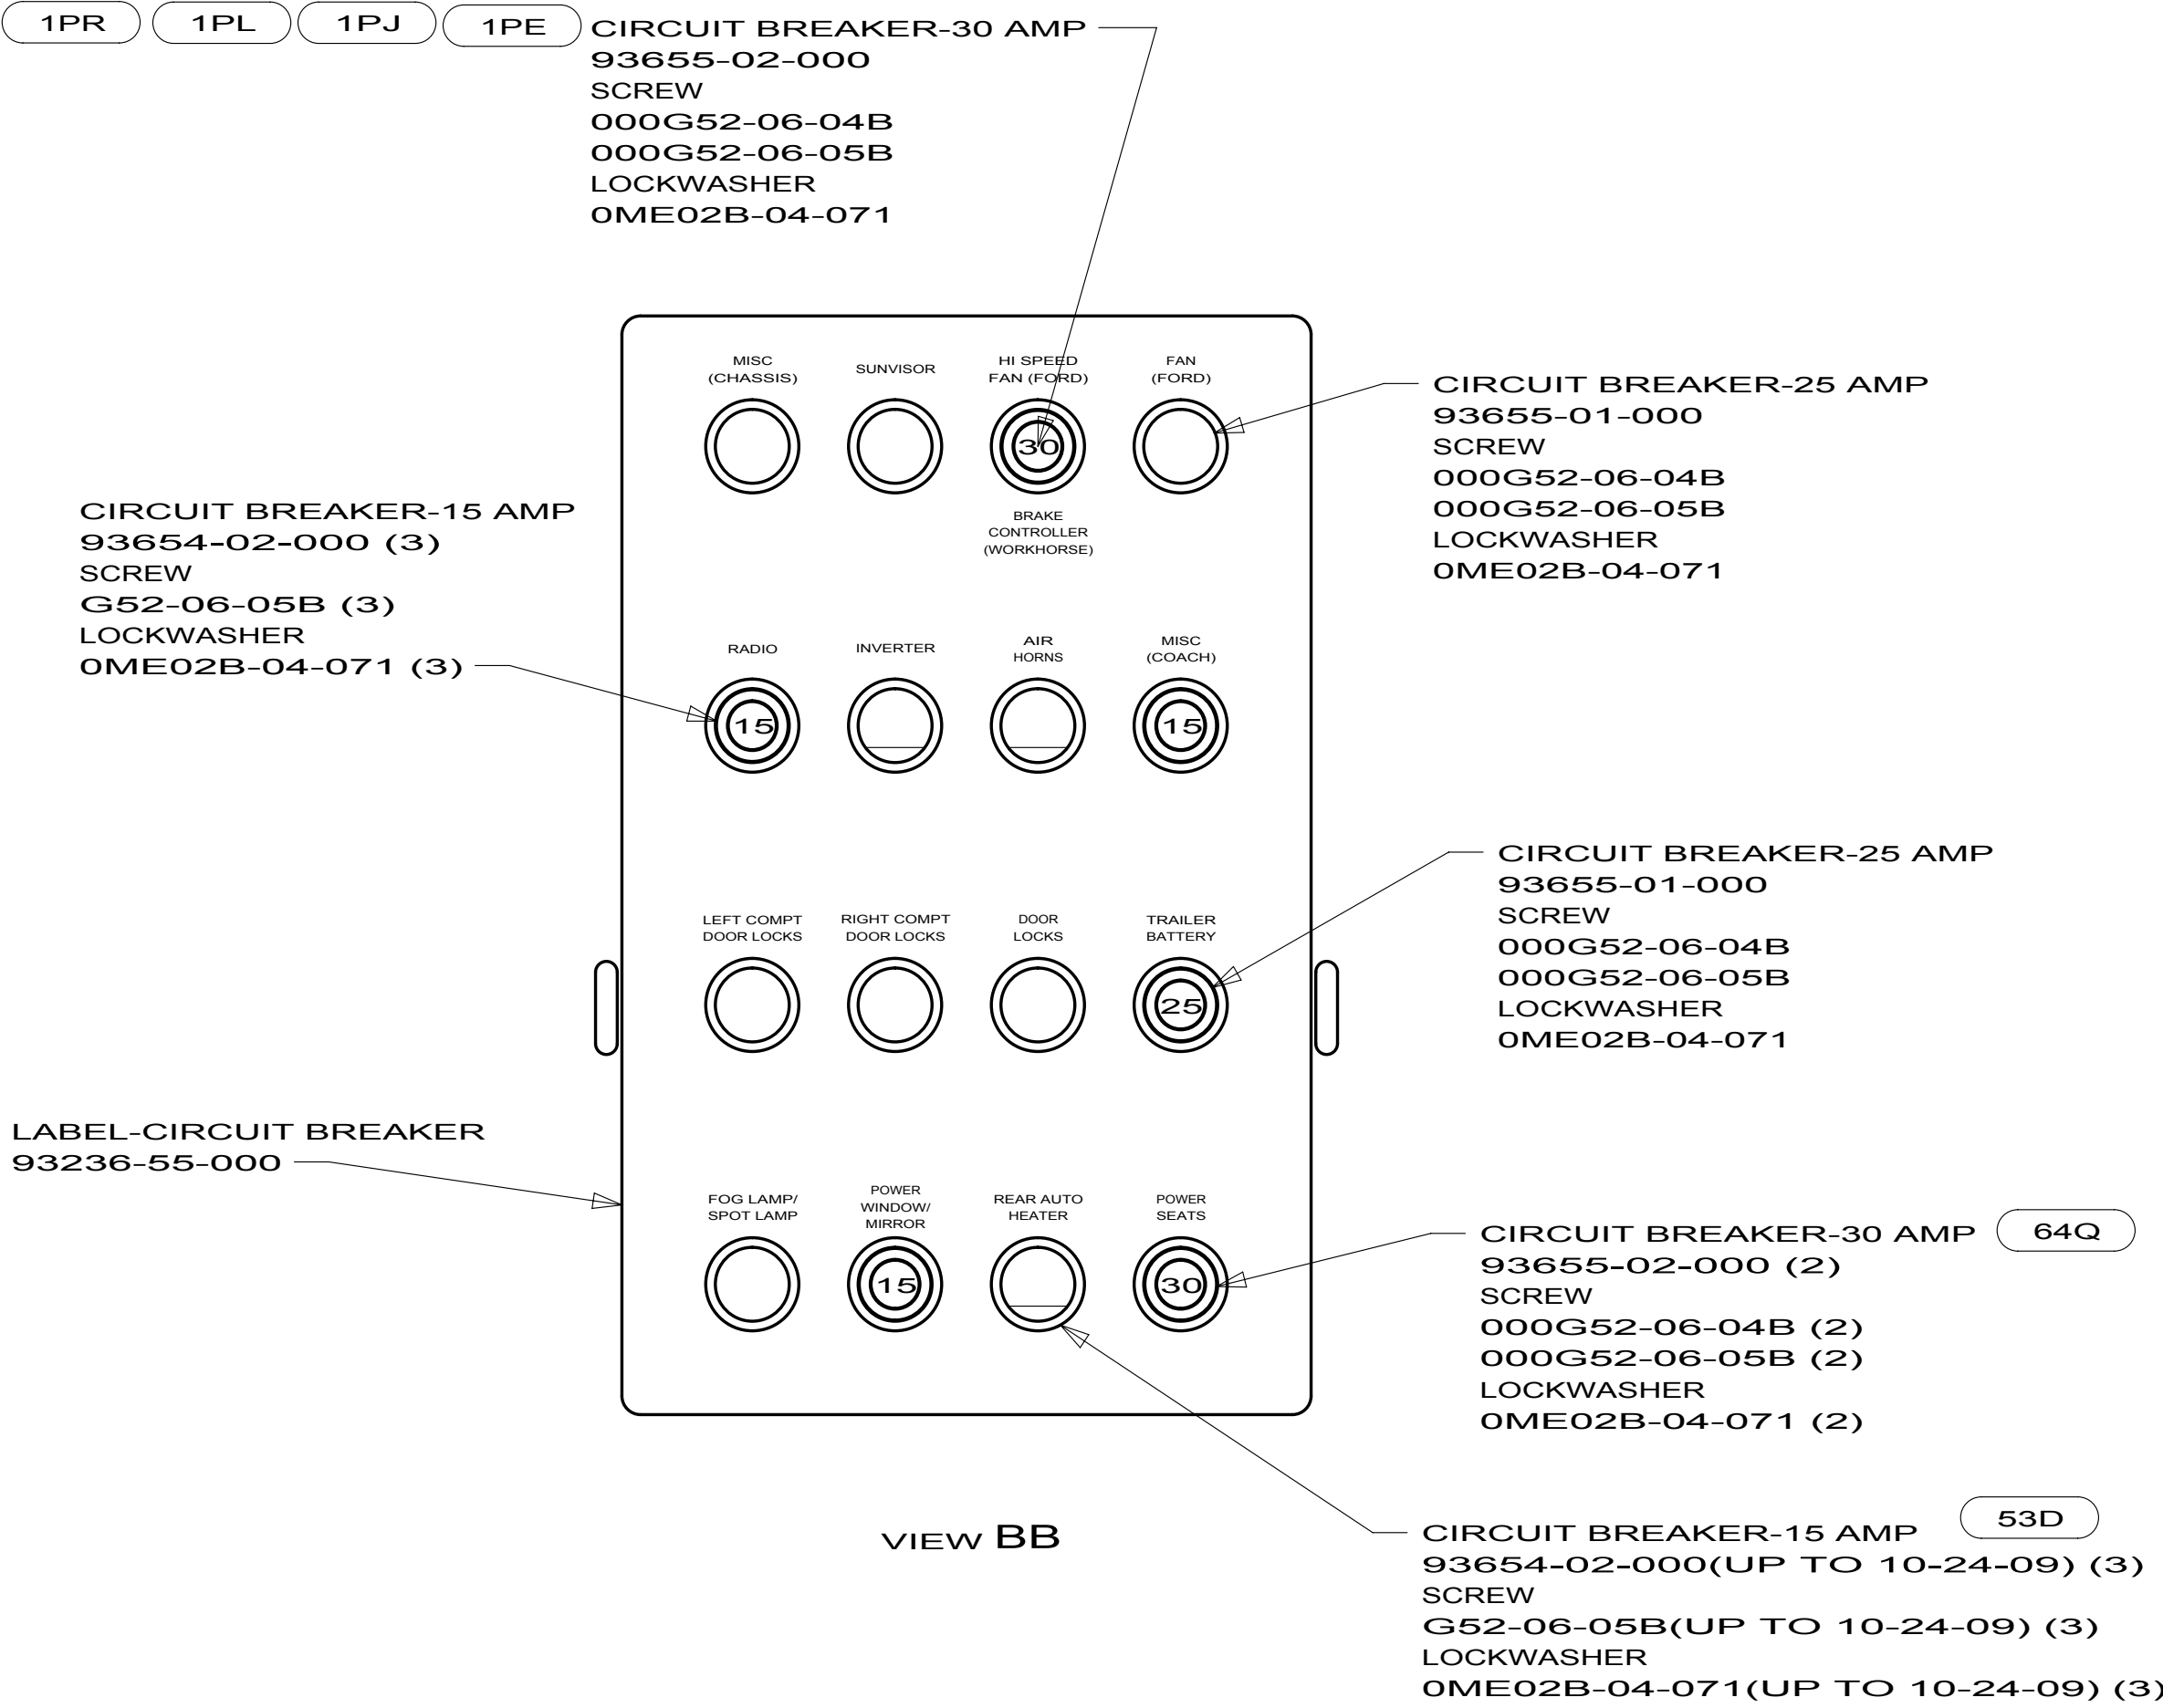


1 ALL CIRCUITS ARE IN WIRE ASM-IP.MAIN.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 967 SEAT PEDESTALS
- 64Q SEAT PED-6-WAY POWER DRIVER
- 53D WTR HTR-6GAL/ELE/LP/MOTORAIID
- 1PE WORKHORSE 20,500 DSL 230HP
- 1PL WORKHORSE 18,000# GVWR (W18)
- 1PJ WORKHORSE 16,000# GVWR (W16)
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 16N FORD CHASSIS-16,000 LB. GVWR
- 16K FORD CHASSIS 22,000
- 16H FORD CHASSIS 18,000#/V10 ENG
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 E-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 2	PART NO 171693	REV

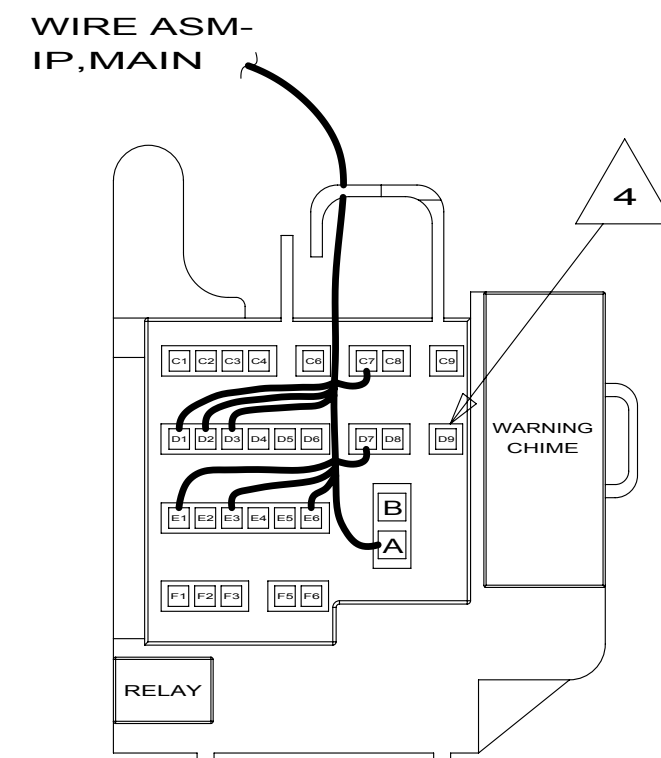


VIEW CB
COURTESY CENTER
(CHASSIS SUPPLIED)

1PR 1PJ 1PL 1PE

- 53Z WTR HTR-6GAL/110/LP/MTR/AUTO
- 1PE WORKHORSE 20,500 DSL 230HP
- 1PL WORKHORSE 18,000# GVWR (W18)
- 1PJ WORKHORSE 16,000# GVWR (W16)
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 60M HYDRAULIC LEVEL JACKS-AUTO
- 28X MIRRORS-EXTERIOR W/DEFROST
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 E-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 3	PART NO 171693	REV

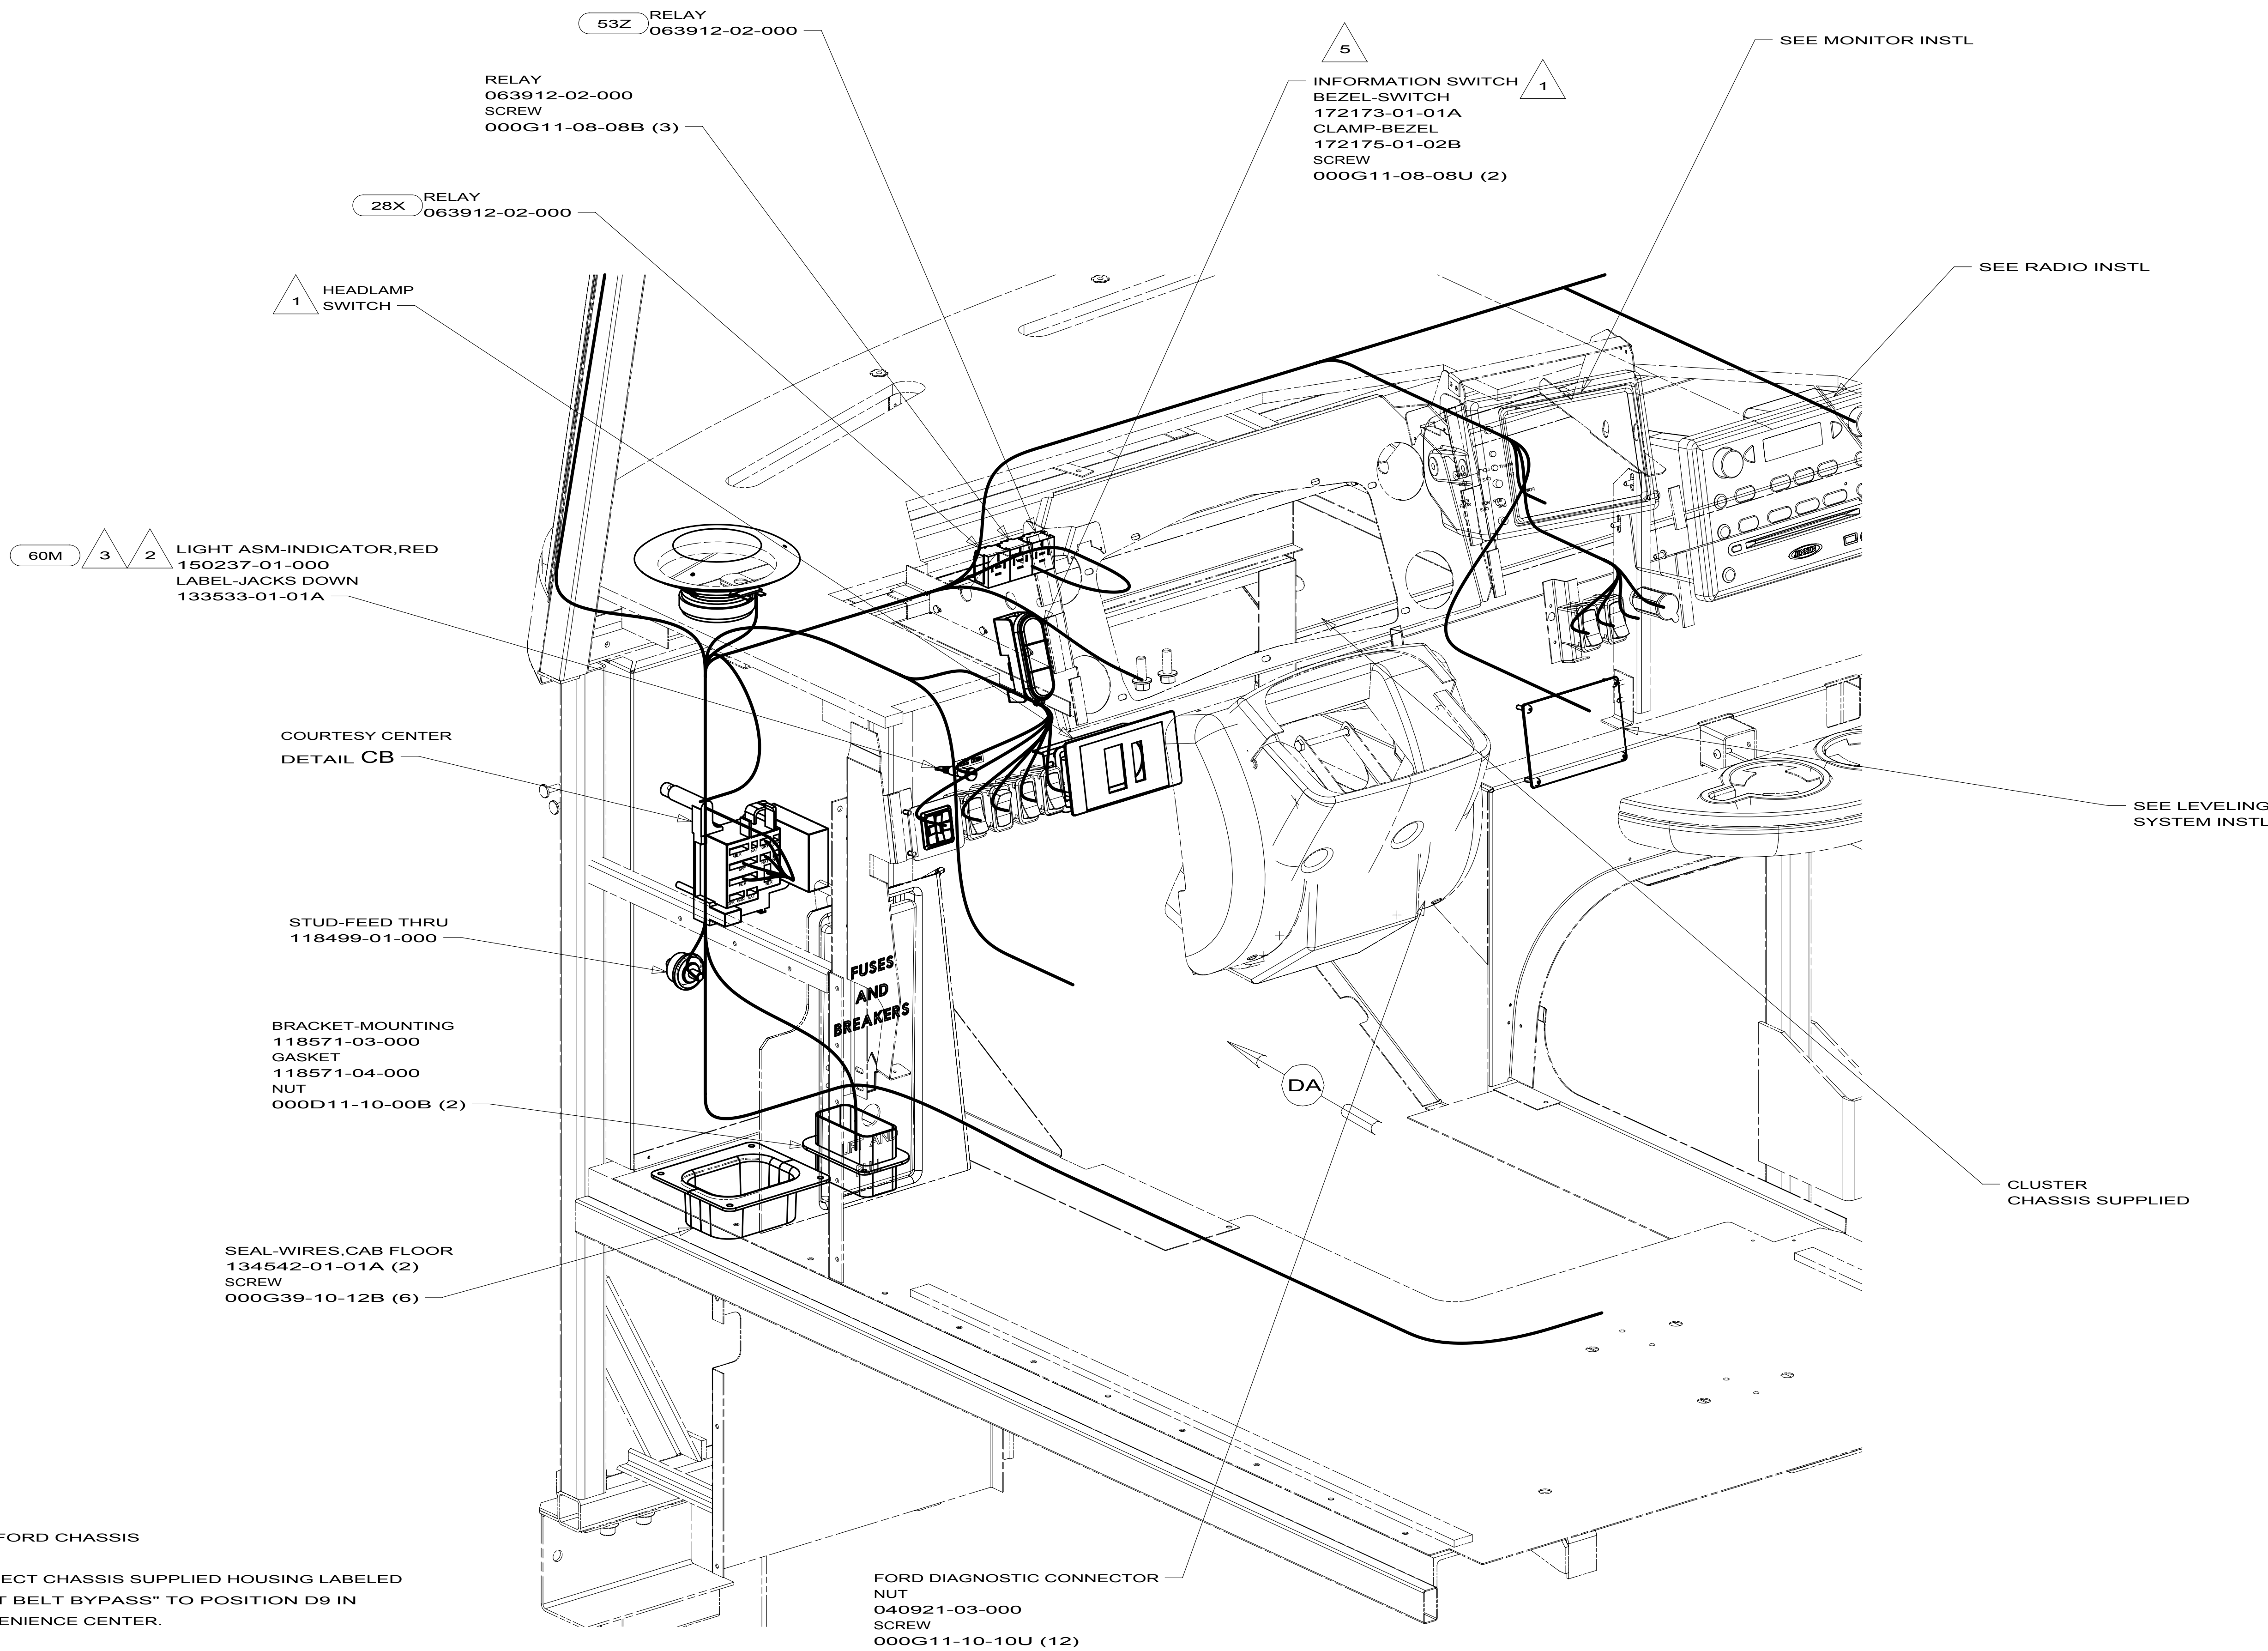


- 5 2009 FORD CHASSIS
- 4 CONNECT CHASSIS SUPPLIED HOUSING LABELED "SEAT BELT BYPASS" TO POSITION D9 IN CONVENIENCE CENTER.
- 3 WIRING FROM LEVELING SYSTEM. SEE LEVELING SYSTEM INSTL. FOR ADDITIONAL INFORMATION
- 2 CONNECT POSITIVE WIRE TO TERMINAL MARKED WITH A "+".
- 1 CHASSIS SUPPLIED


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DETAIL CA

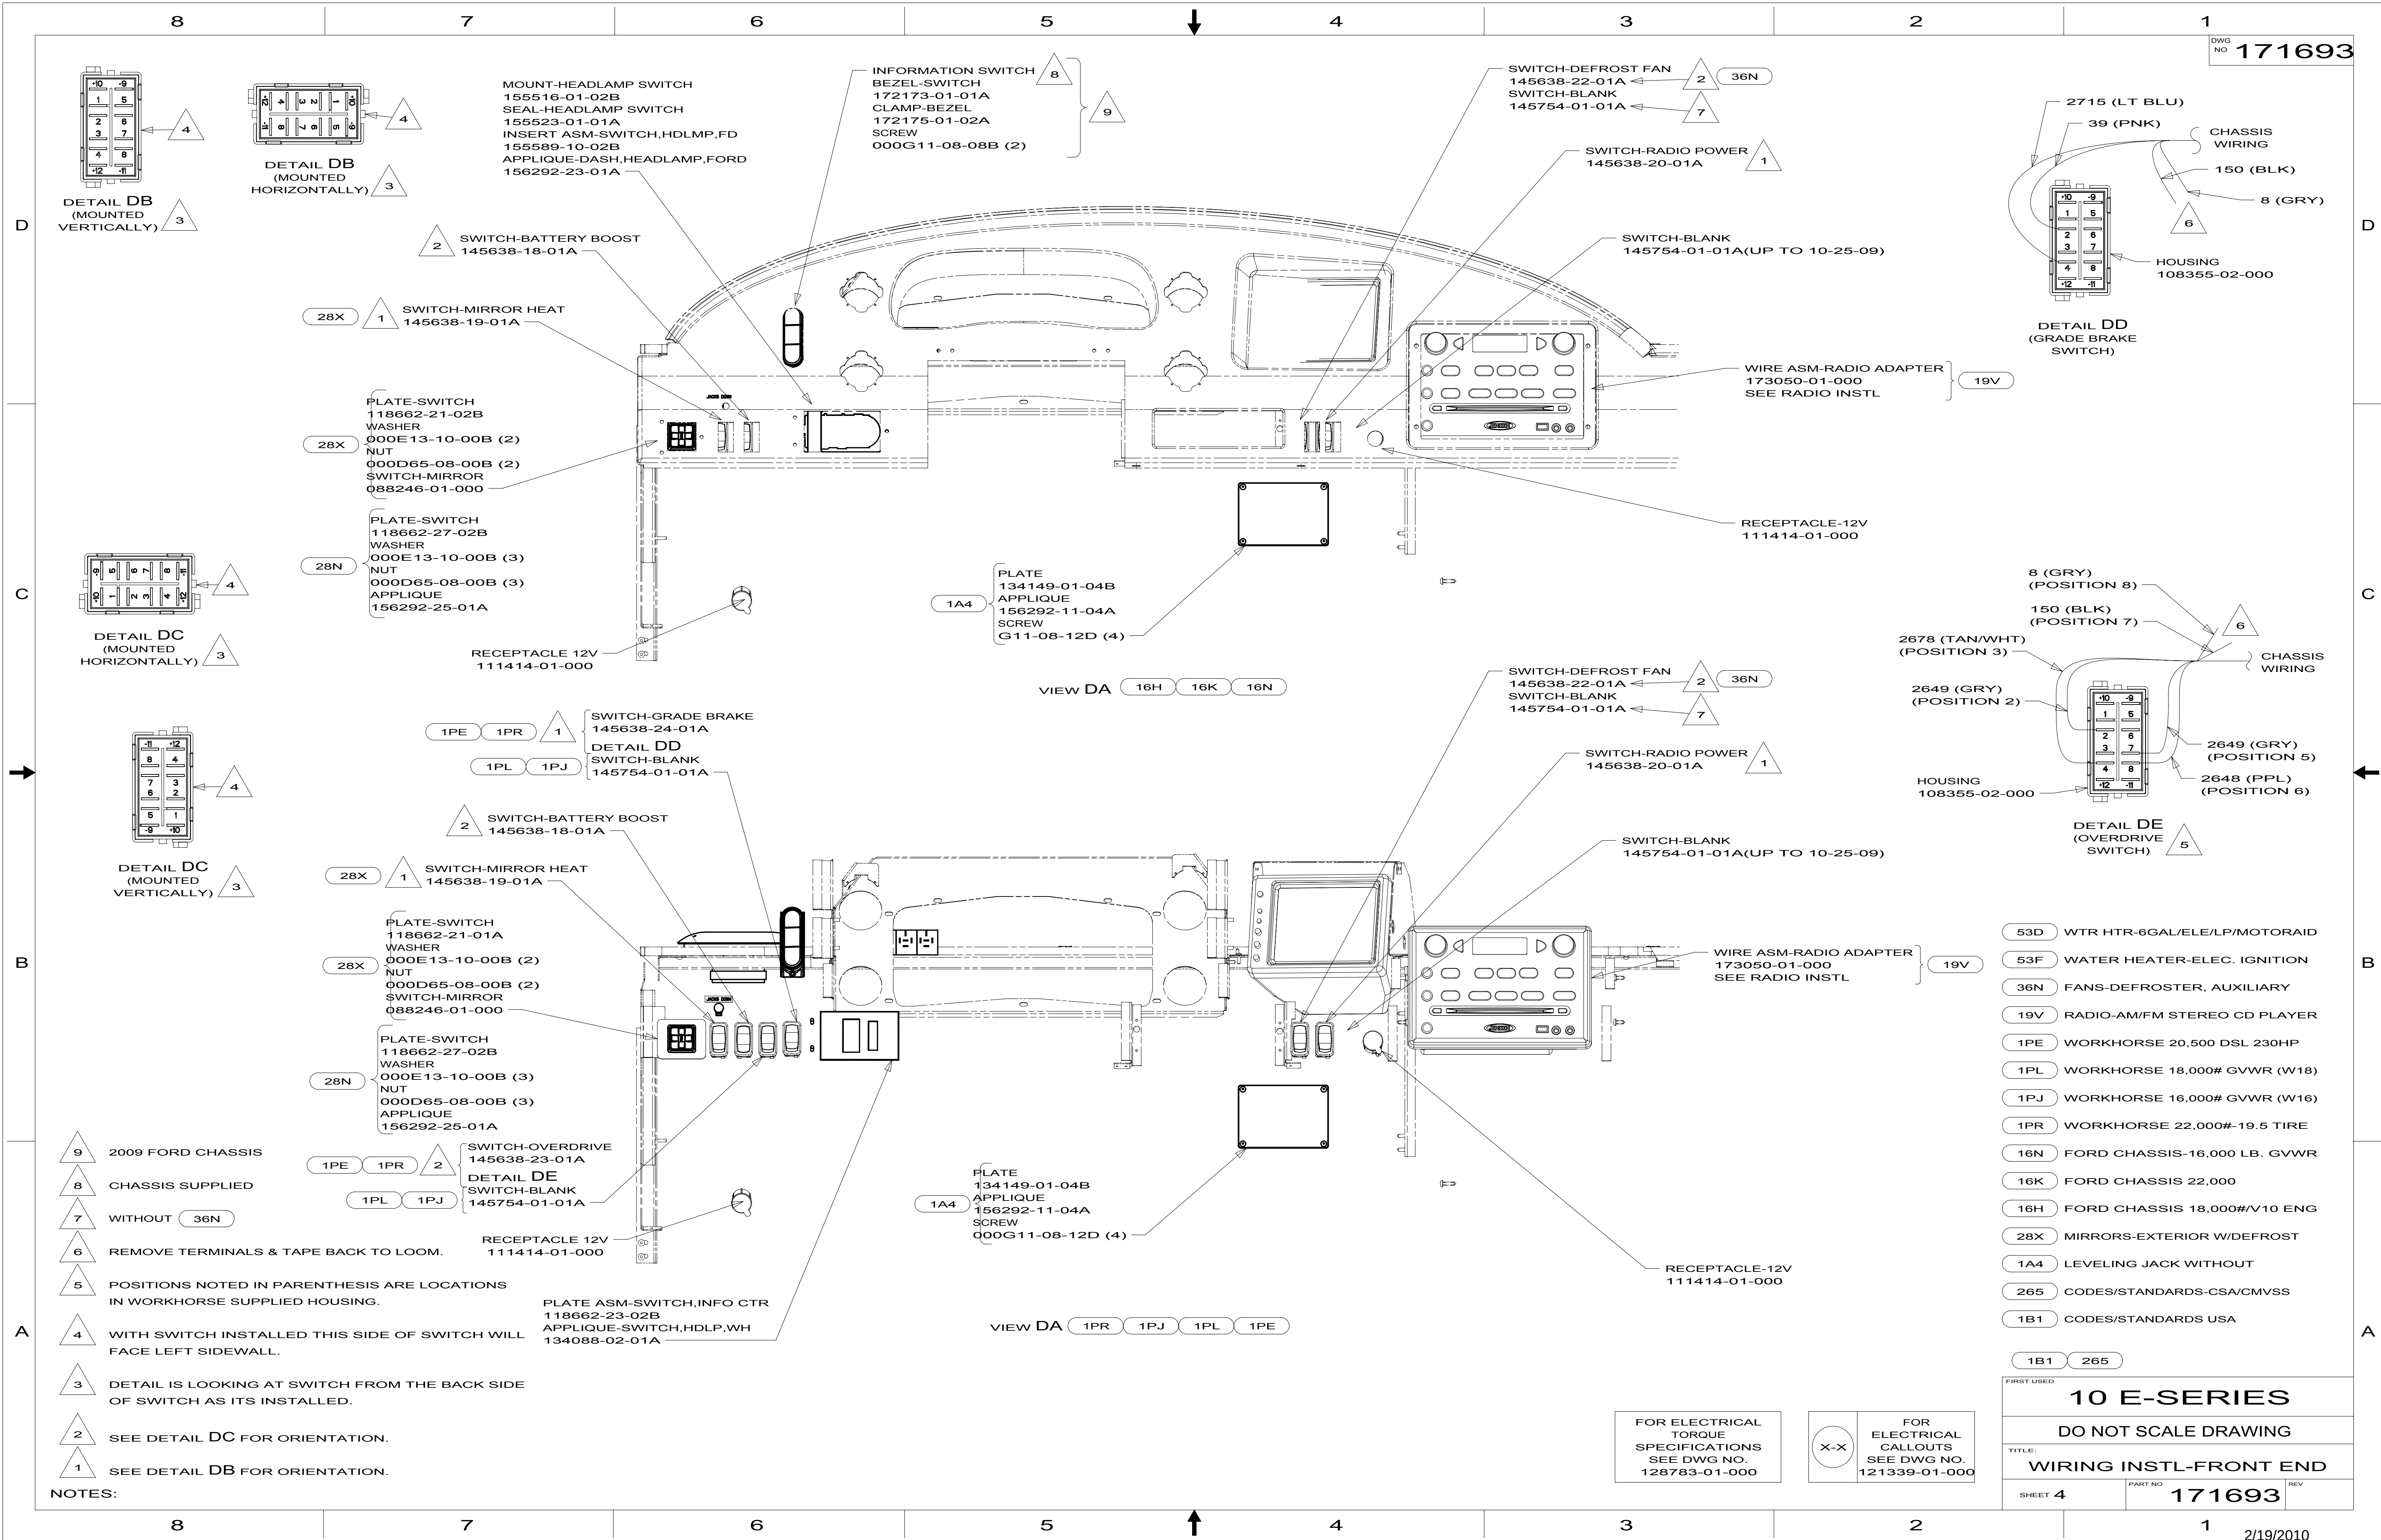

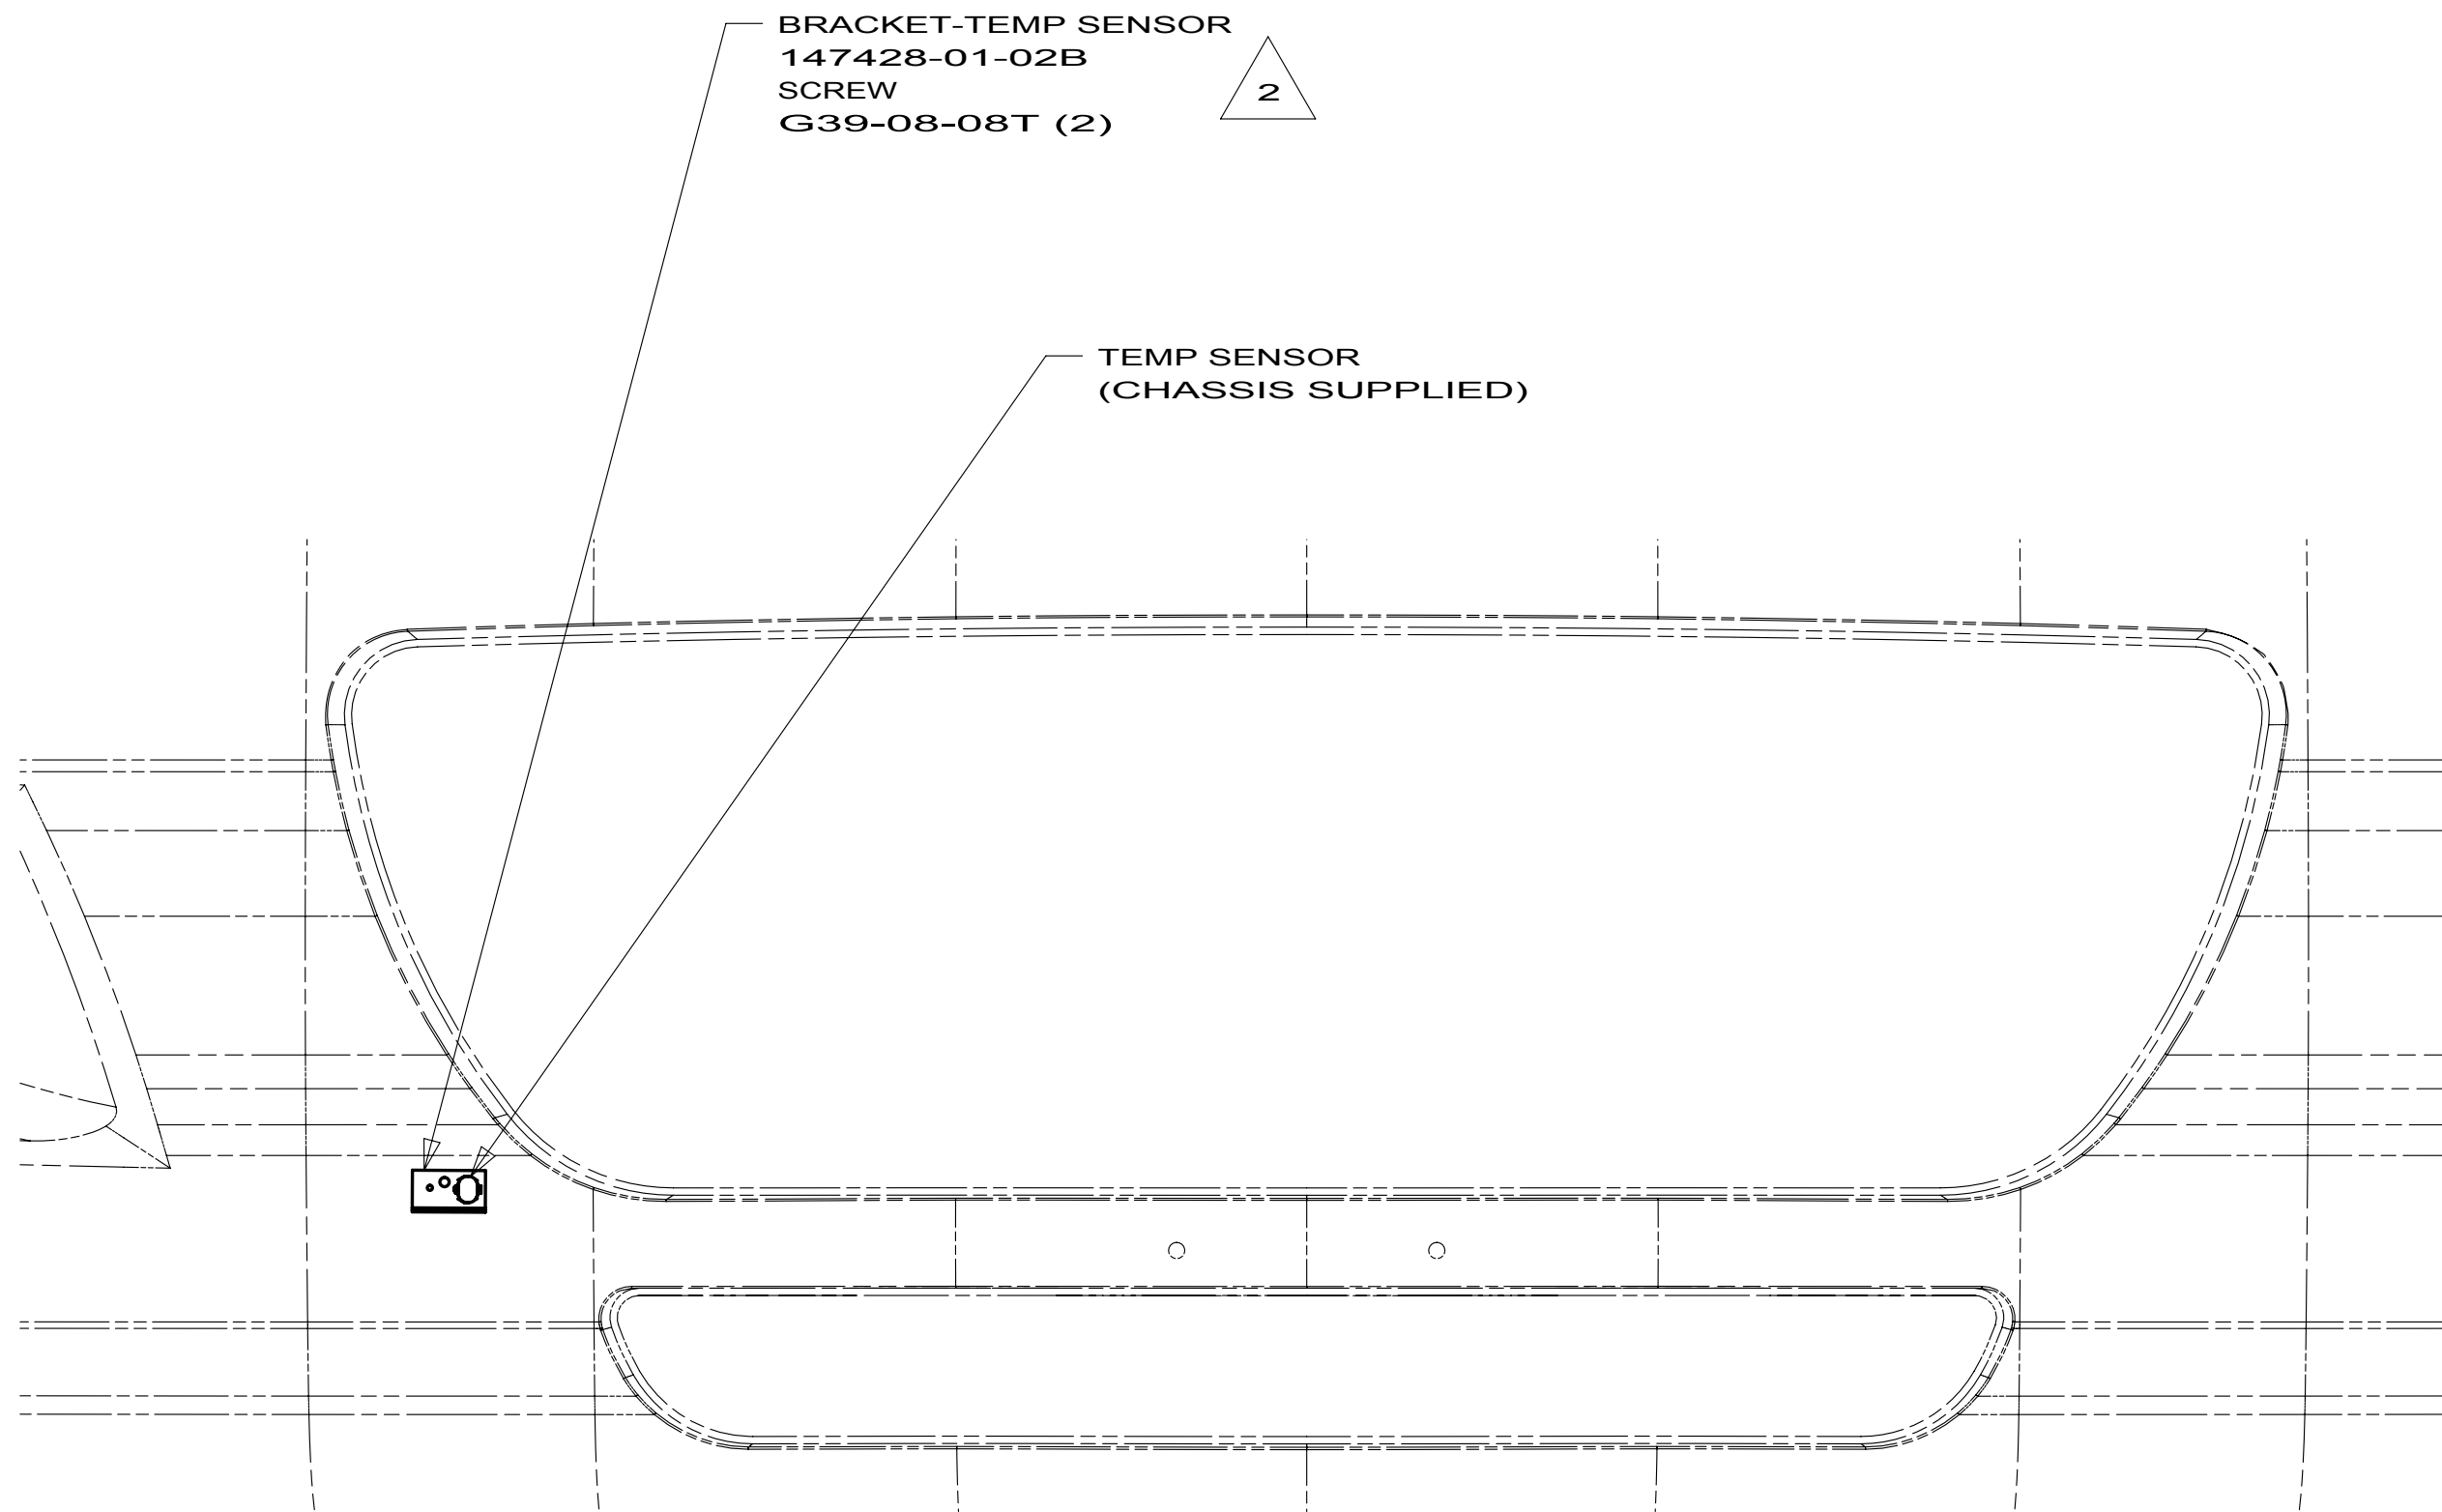

DETAIL EB

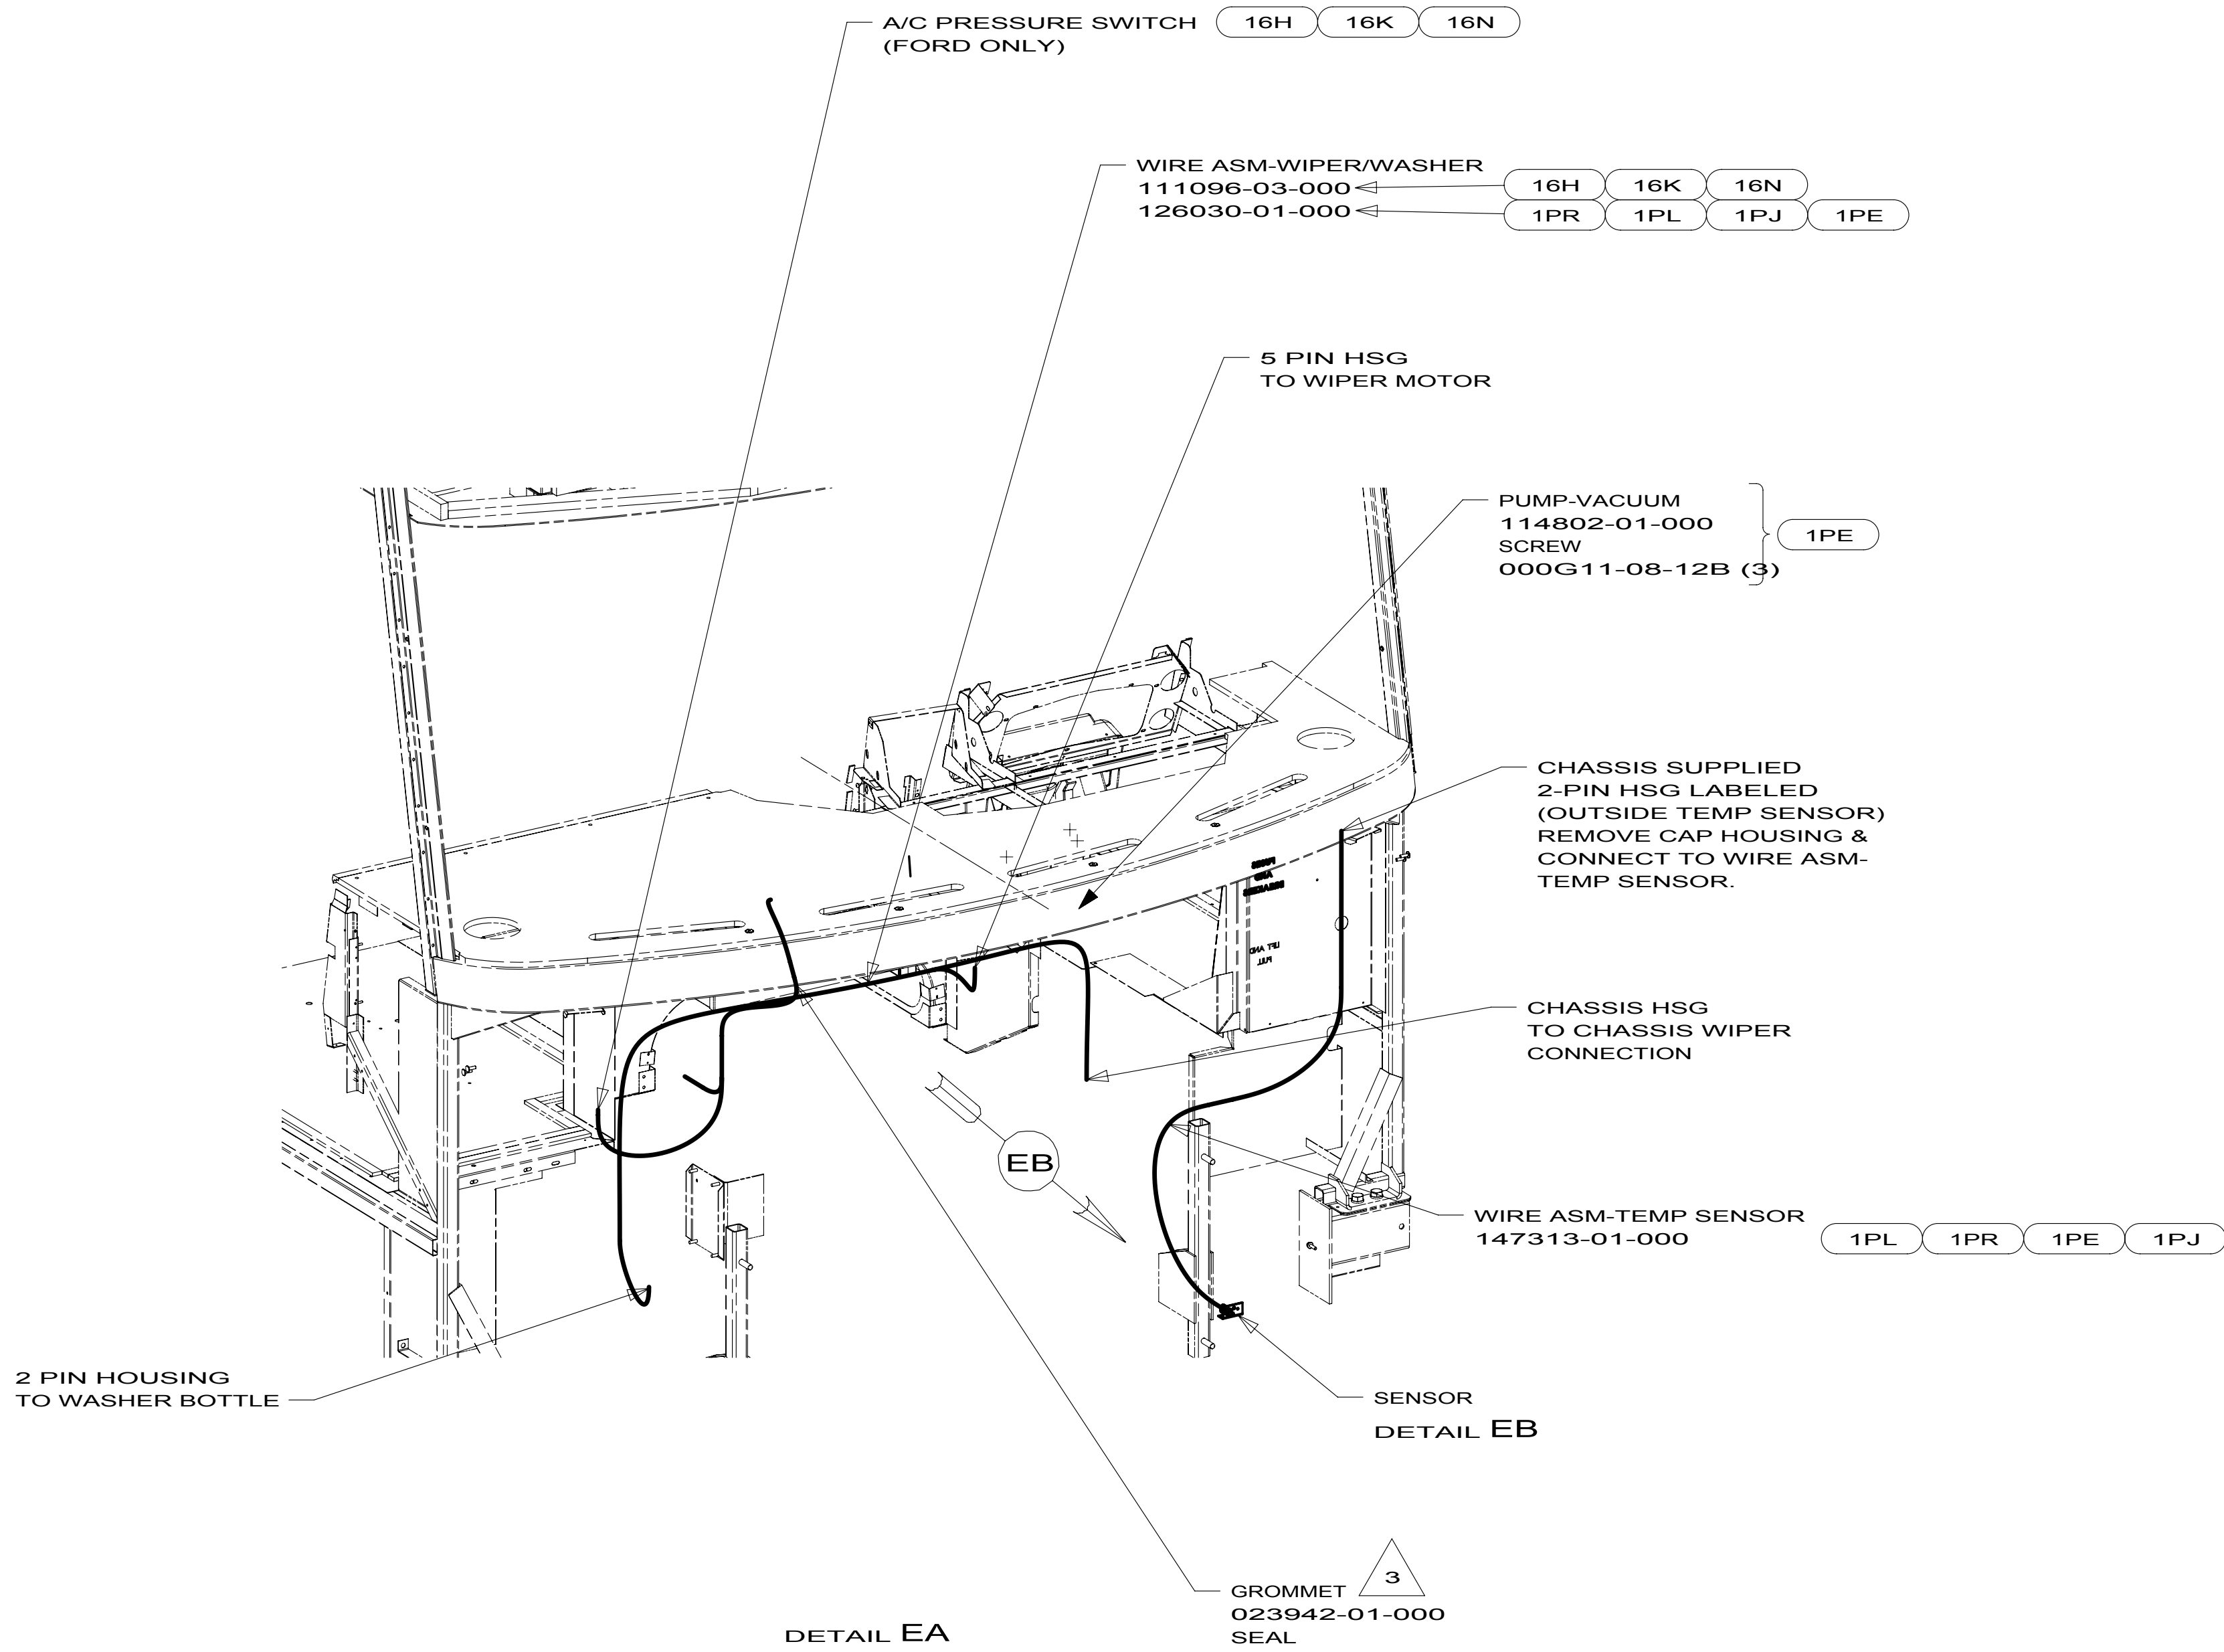

DETAIL EA

- 3 ROUTE WIRES THROUGH HOLE IN STEEL.
- 2 MOUNT SENSOR OR SENSOR BRACKET TO HORIZONTAL TUBE ON FIBERGLASS AS SHOWN.

1. GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS. BUNDLE AND SECURE WITH WIRE TIE 008343-01-000 OR 093147-01-000.

NOTES:


- 1PE WORKHORSE 20,500 DSL 230HP
- 1PJ WORKHORSE 16,000# GVWR (W16)
- 1PL WORKHORSE 18,000# GVWR (W18)
- 1PR WORKHORSE 22,000#-19.5 TIRE
- 16N FORD CHASSIS-16,000 LB. GVWR
- 16K FORD CHASSIS 22,000
- 16H FORD CHASSIS 18,000#/V10 ENG
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 E-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 5	PART NO 171693	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

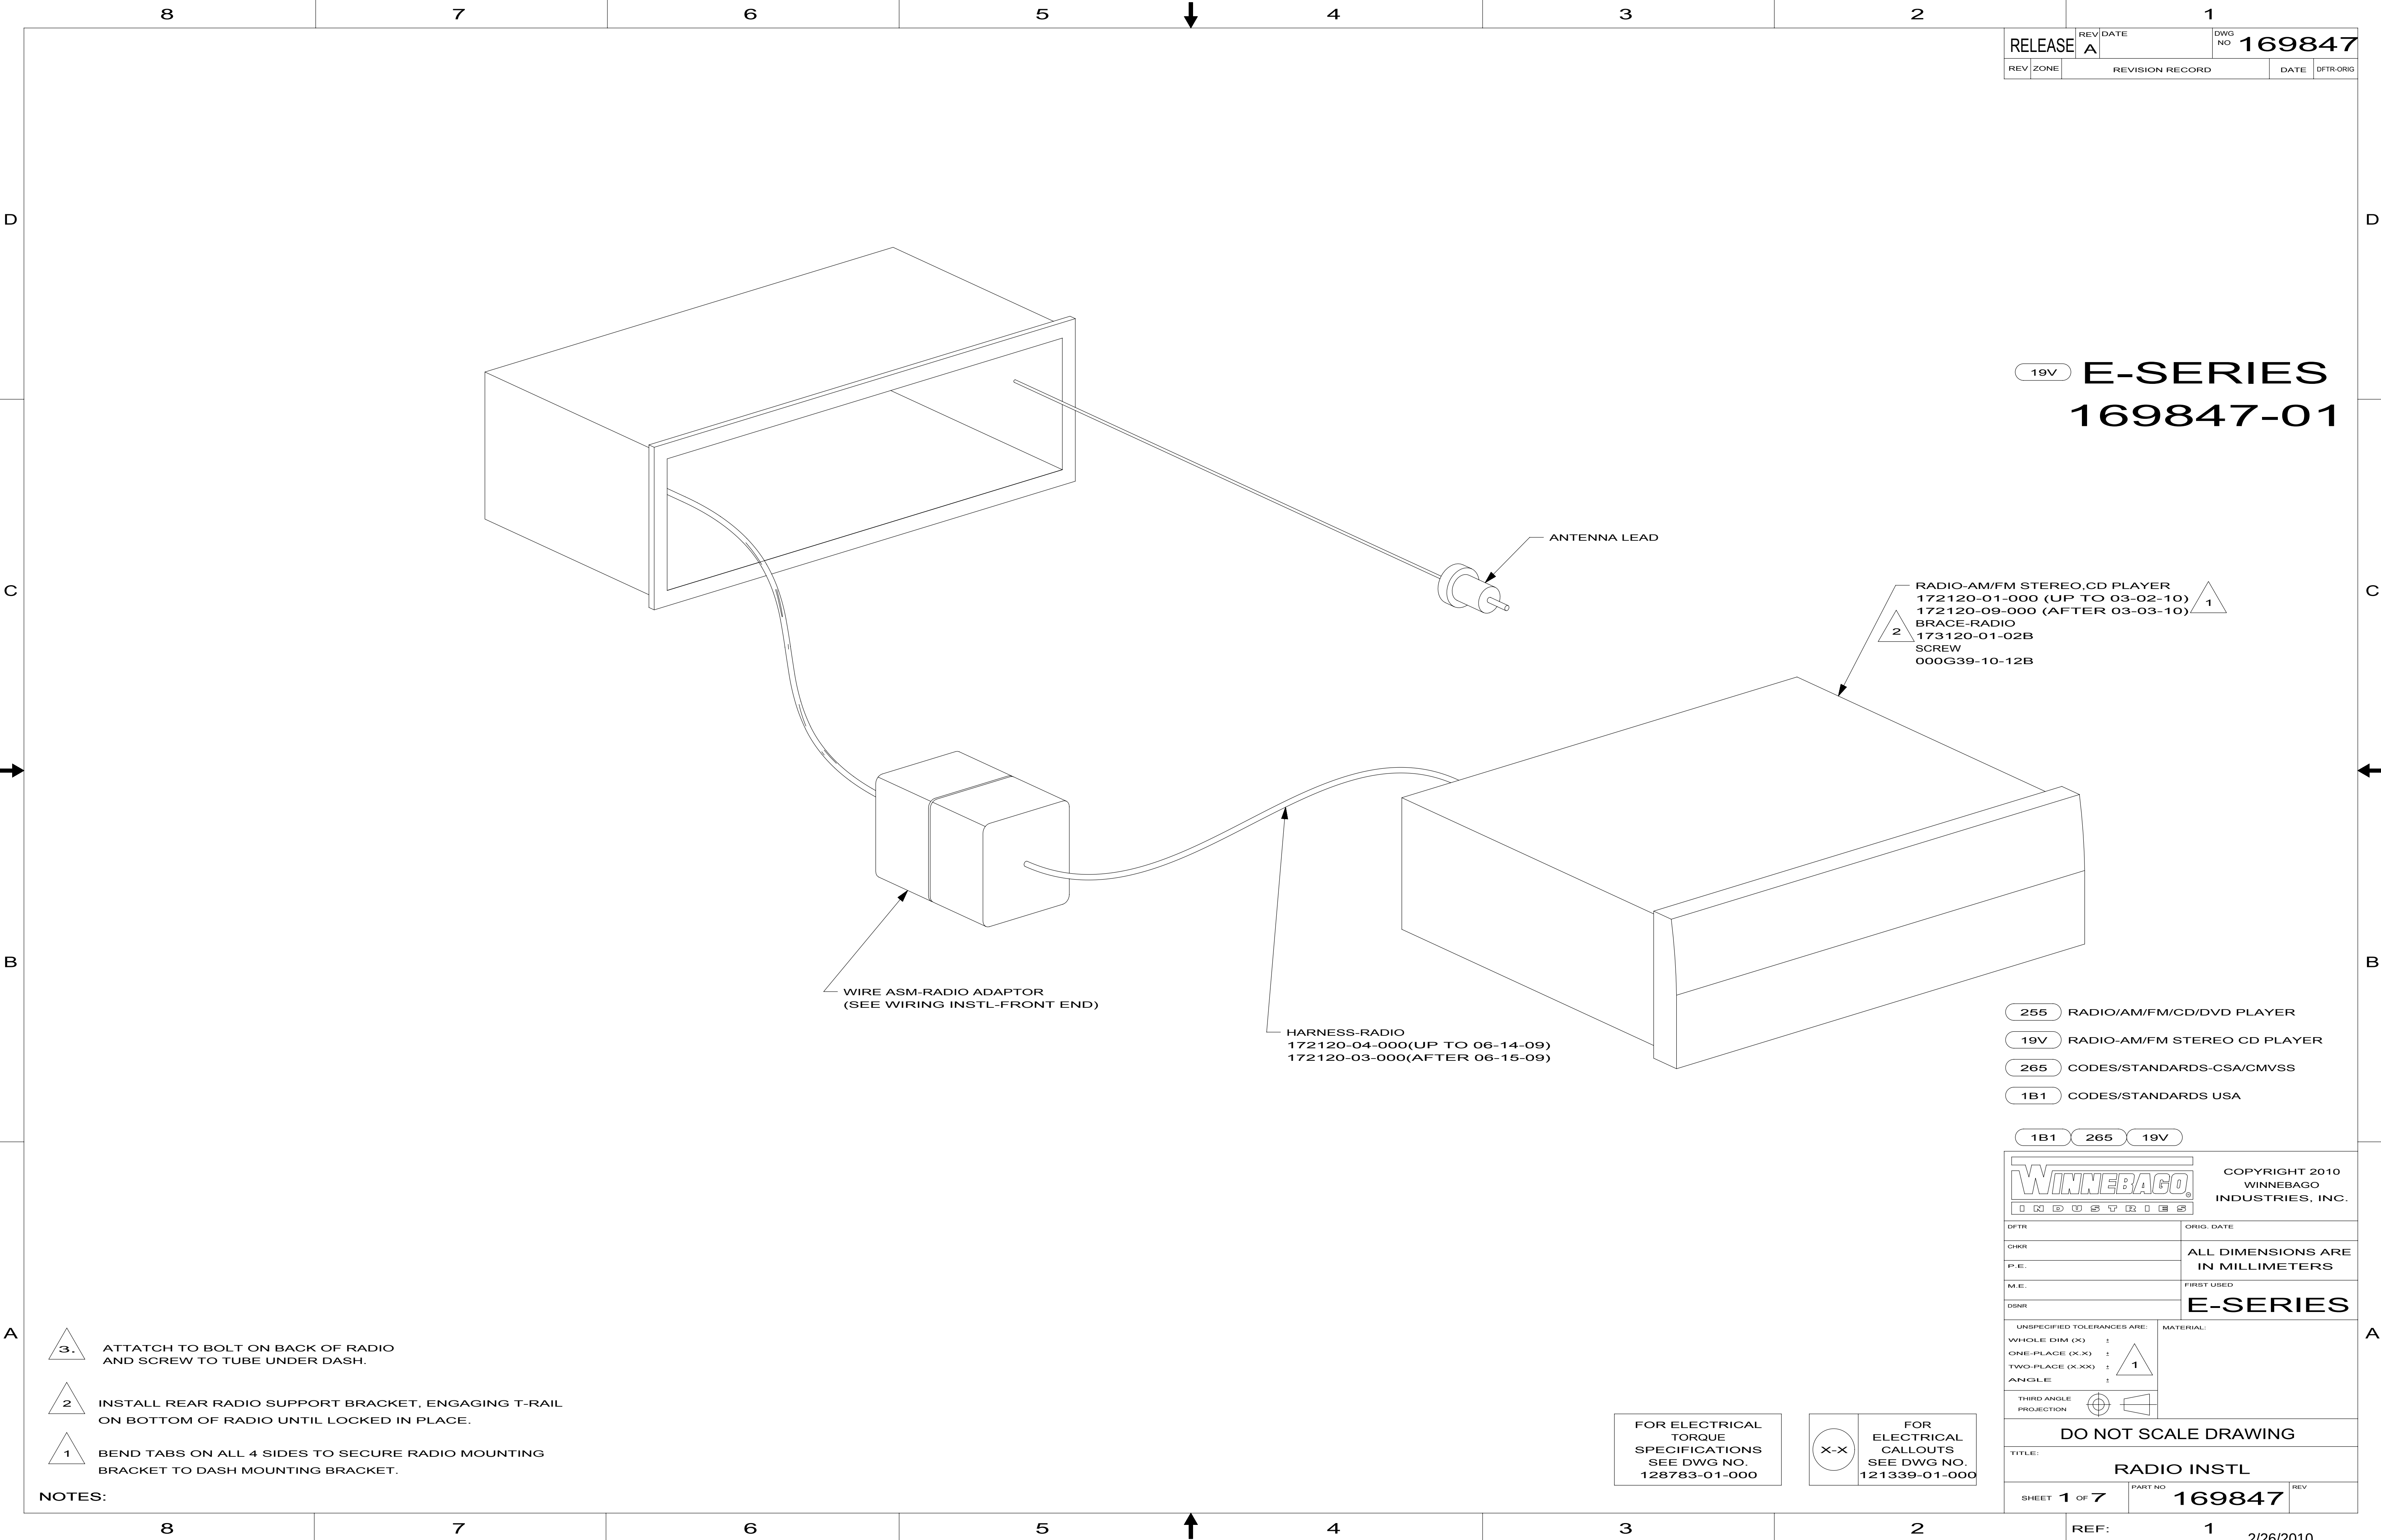



RELEASE		REV	DATE	DWG NO	169847
REV	ZONE	REVISION RECORD			DATE
					DFTR-ORIG

E-SERIES

169847-01

19V RADIO-AM/FM STEREO,CD PLAYER
172120-01-000 (UP TO 03-02-10)
172120-09-000 (AFTER 03-03-10)
BRACE-RADIO
173120-01-02B
SCREW
000G39-10-12B

- 255 RADIO-AM/FM/CD/DVD PLAYER
- 19V RADIO-AM/FM STEREO CD PLAYER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1		265		19V			
						COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
I N D U S T R I E S							
DFTR		ORIG. DATE					
CHGR		ALL DIMENSIONS ARE IN MILLIMETERS					
P.E.							
M.E.		FIRST USED					
DSNR		E-SERIES					
UNSPECIFIED TOLERANCES ARE:						MATERIAL:	
WHOLE DIM (X)		±					
ONE-PLACE (X.X)		±					
TWO-PLACE (X.XX)		±					
ANGLE		±					
THIRD ANGLE PROJECTION							





DO NOT SCALE DRAWING

TITLE:		RADIO INSTL	
SHEET	1 OF 7	PART NO	169847
		REV	

- NOTES:
- 1 BEND TABS ON ALL 4 SIDES TO SECURE RADIO MOUNTING BRACKET TO DASH MOUNTING BRACKET.
 - 2 INSTALL REAR RADIO SUPPORT BRACKET, ENGAGING T-RAIL ON BOTTOM OF RADIO UNTIL LOCKED IN PLACE.
 - 3 ATTATCH TO BOLT ON BACK OF RADIO AND SCREW TO TUBE UNDER DASH.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

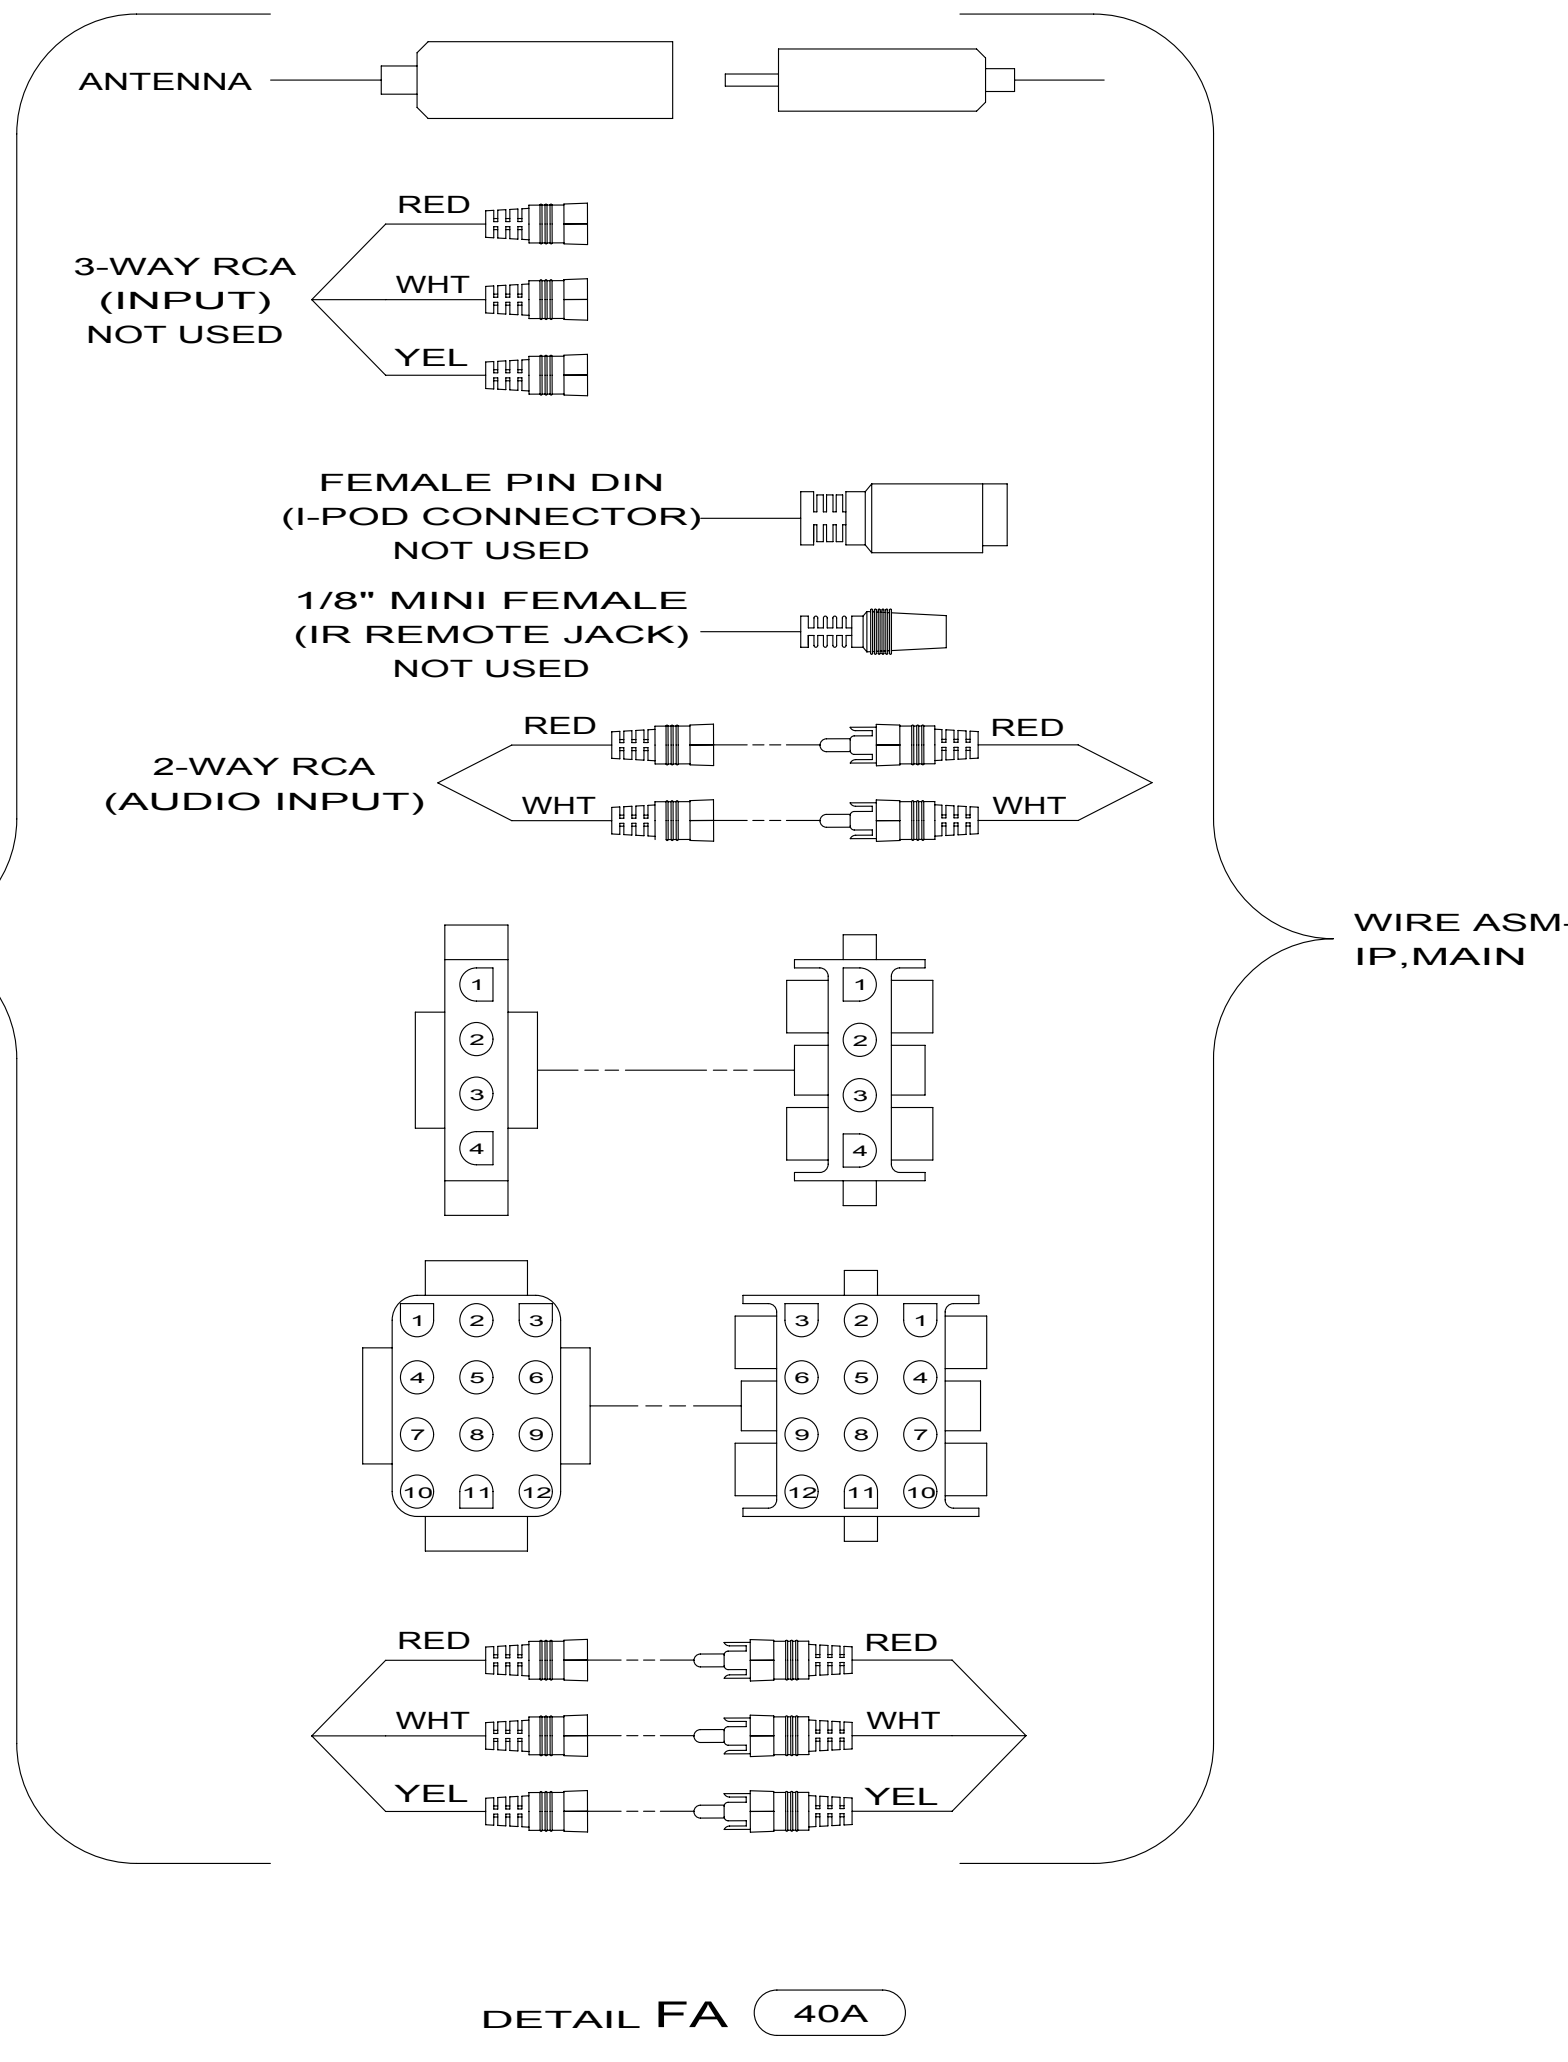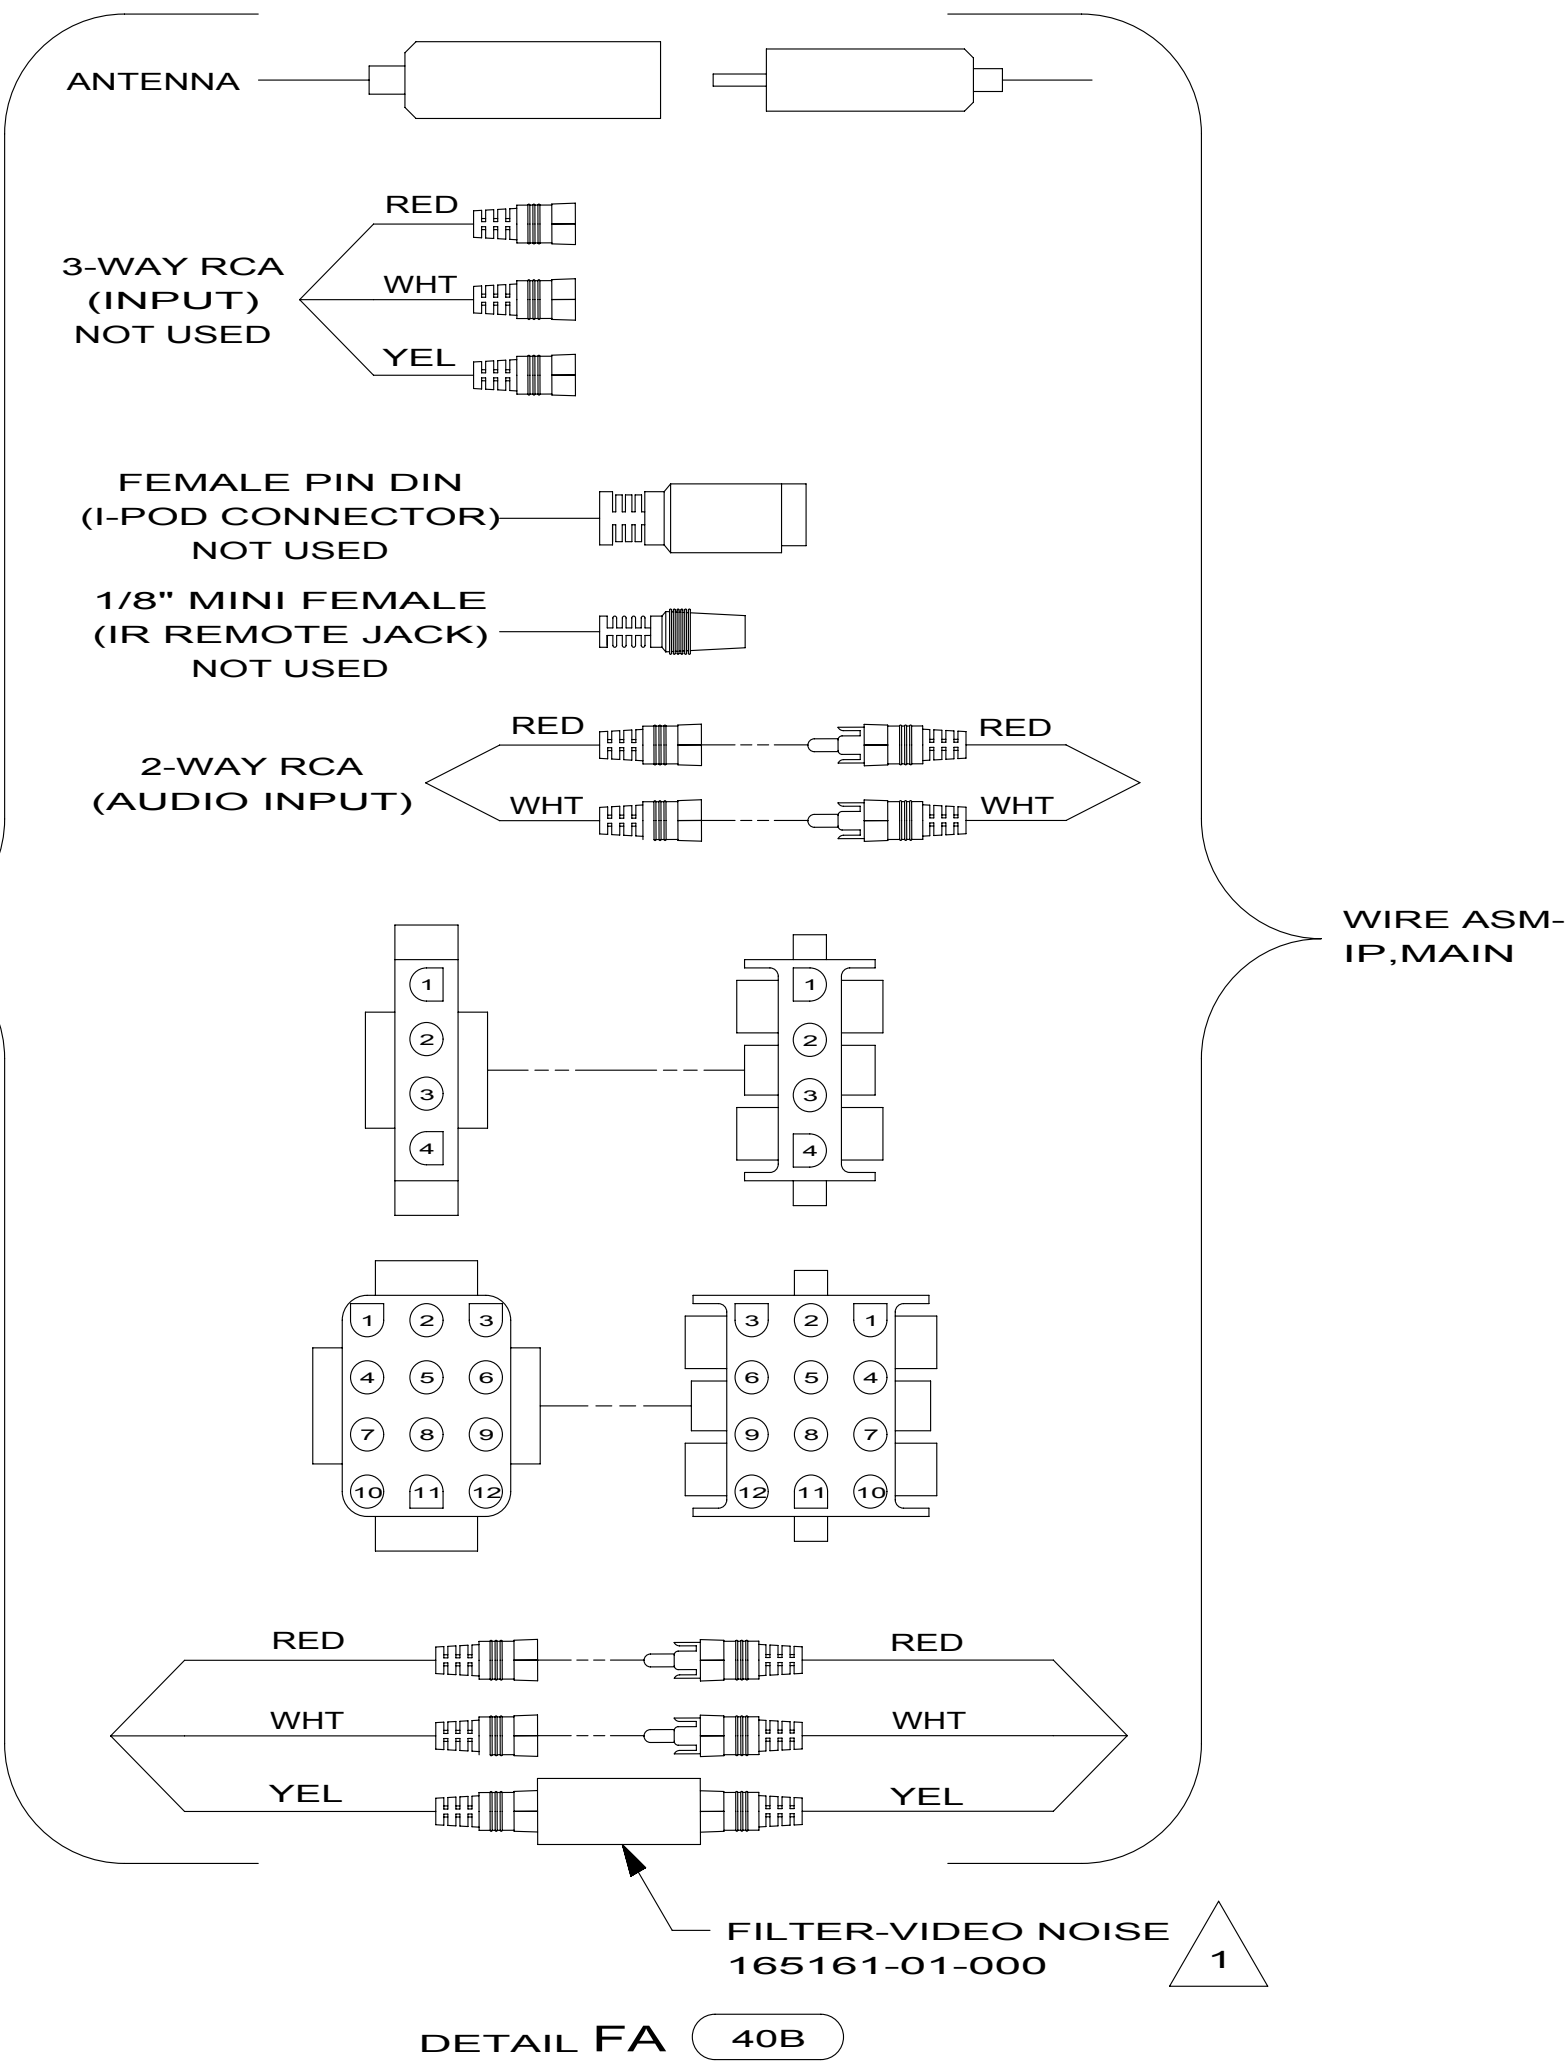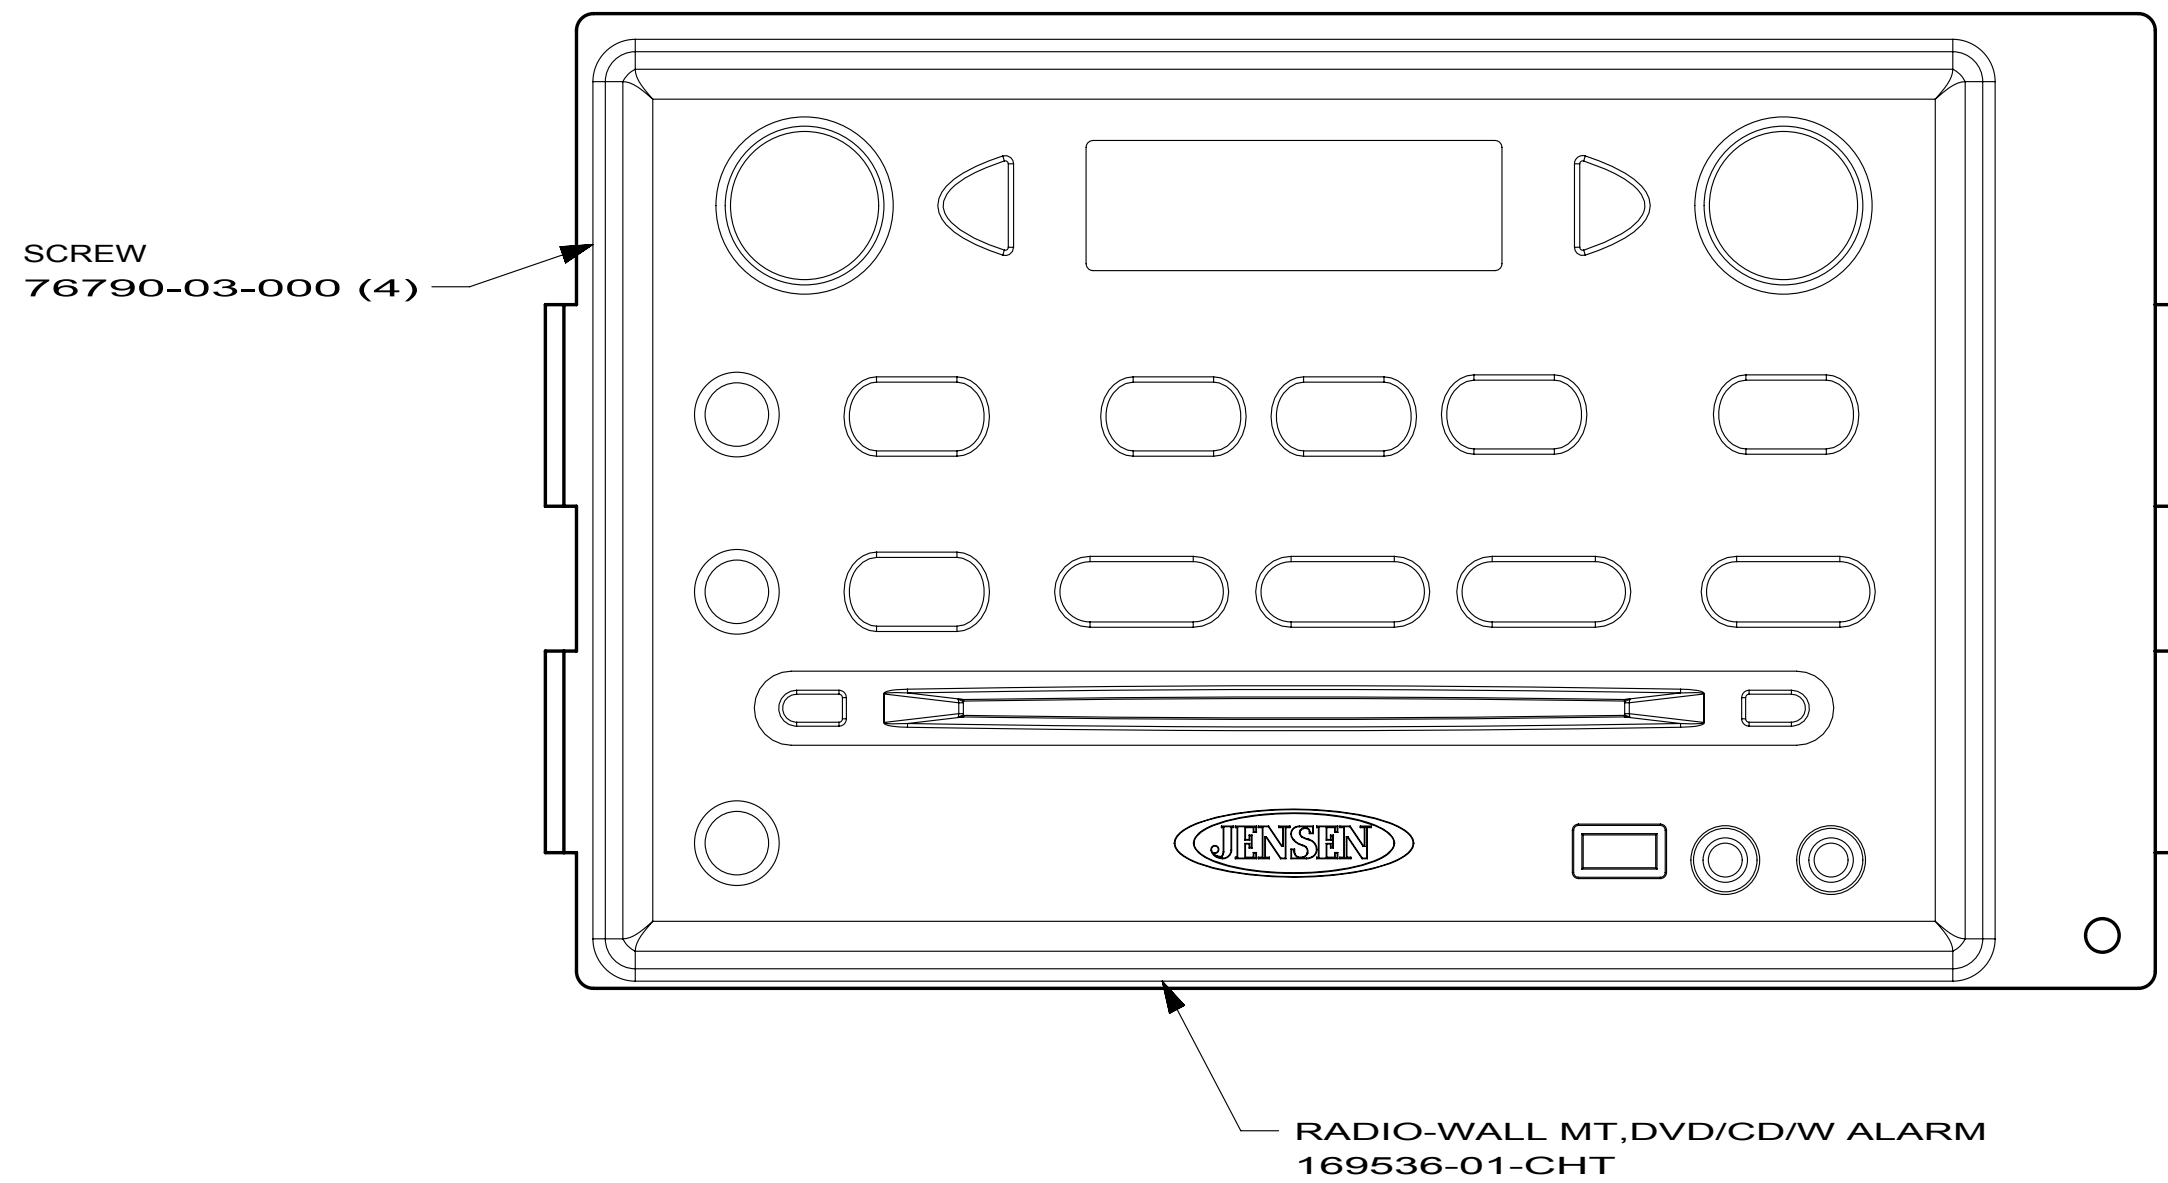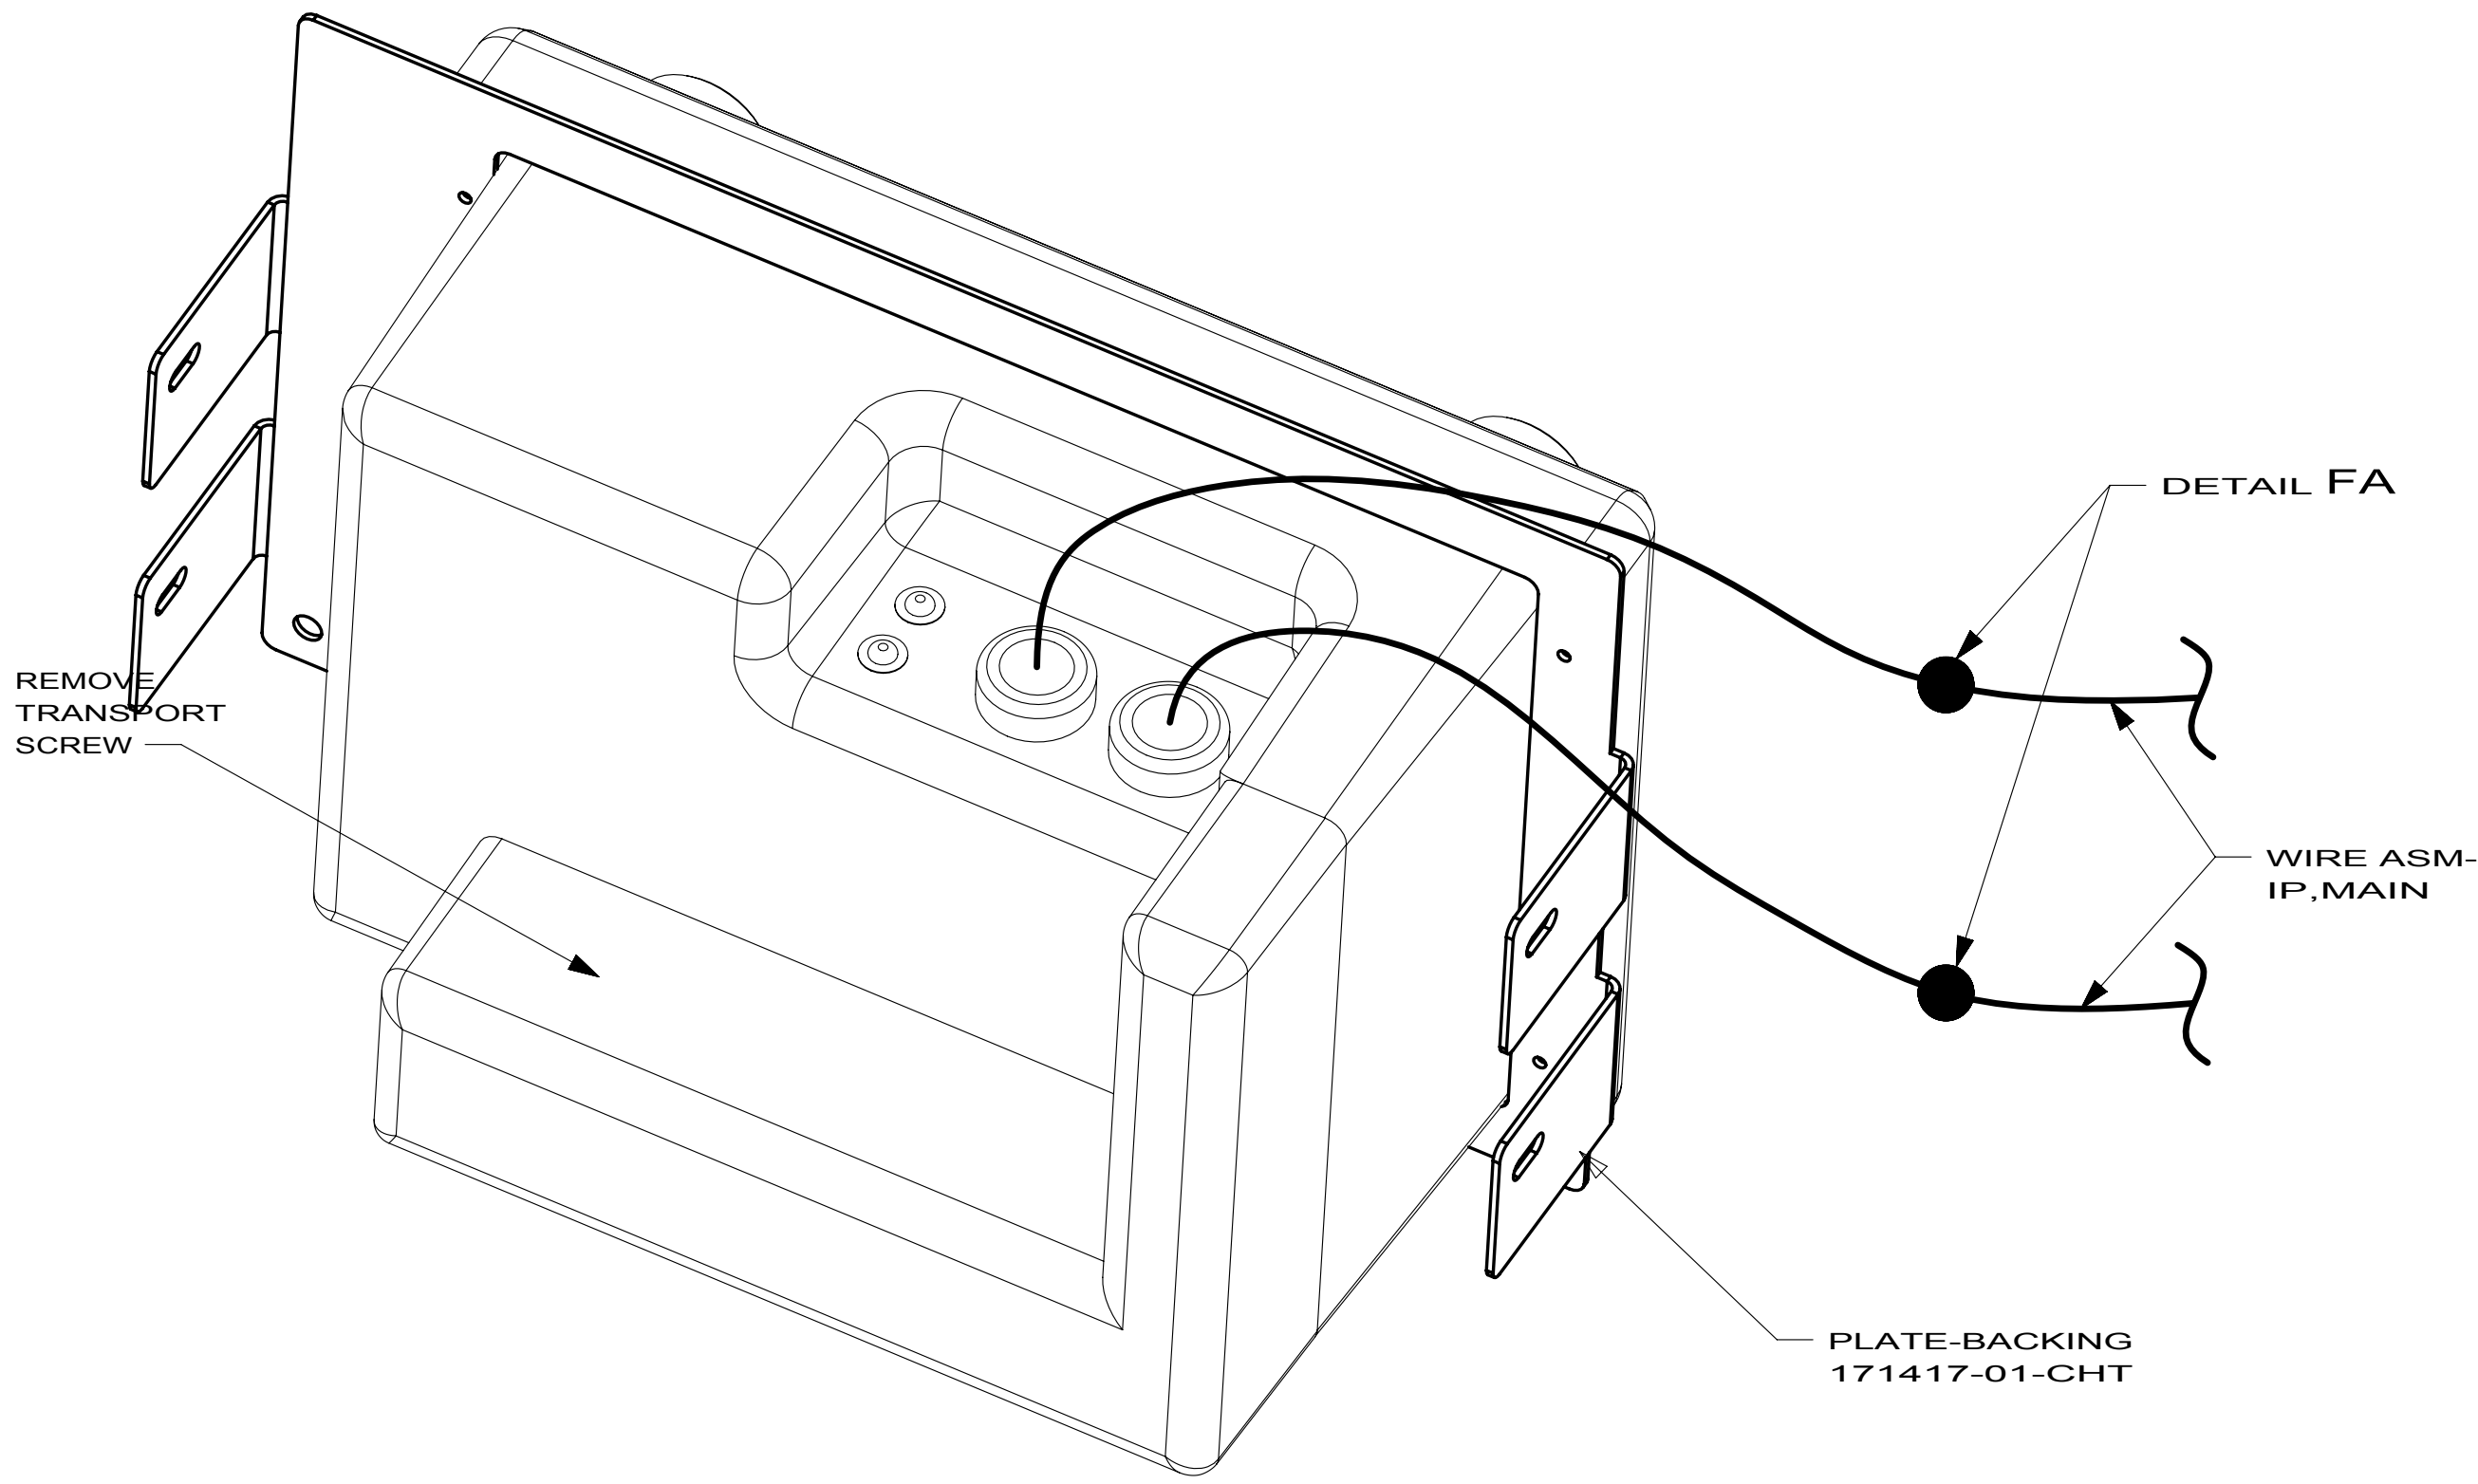

255 D-SERIES
255 E-SERIES
169847-05


- 255 RADIO/AM/FM/CD/DVD PLAYER
- 40B INVERTER-DC/AC, 300 WATT
- 40A INVERTER-DC/AC WITHOUT
- 255 RADIO/AM/FM/CD/DVD PLAYER

FIRST USED		
09 D,E-SERIES		
DO NOT SCALE DRAWING		
TITLE: RADIO INSTL		
SHEET 5	PART NO 169847	REV


1 CONNECTS IN-LINE OF YELLOW VIDEO CABLE.
WRAP BOTH ENDS OF FILTER CONNECTIONS WITH
TAPE 8363-01-000 TO SECURE FILTER TO WIRE ASM.

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	169536-01-700	EA	REMOTE - SERVICE PACK	PSVCAWM970

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	172120-01-700	EA	REMOTE - RADIO	REMJC

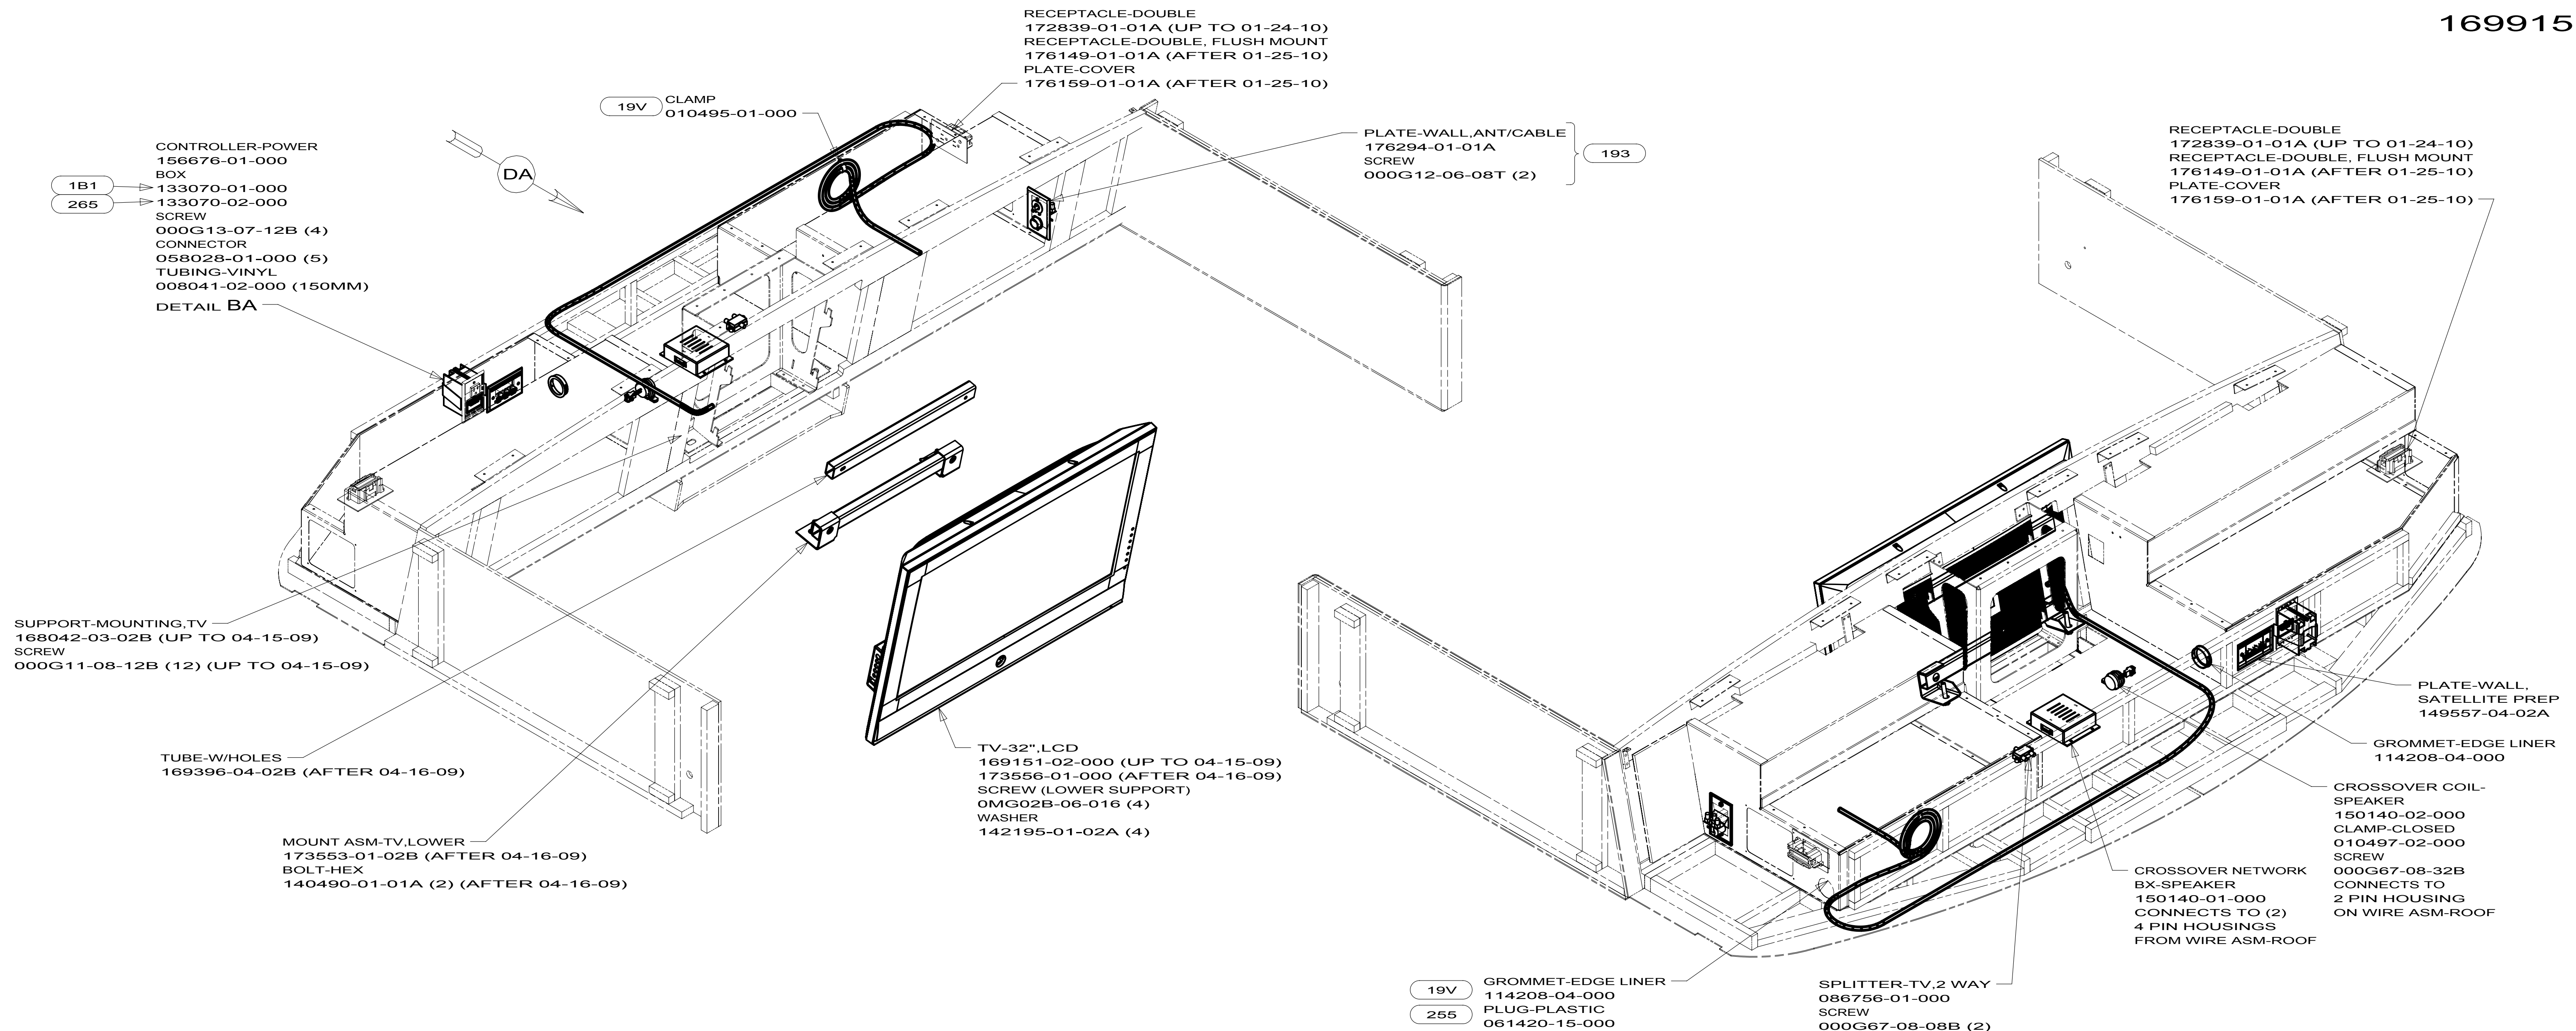

169915-01 E26P
169915-03 E30W
169915-04 E32K

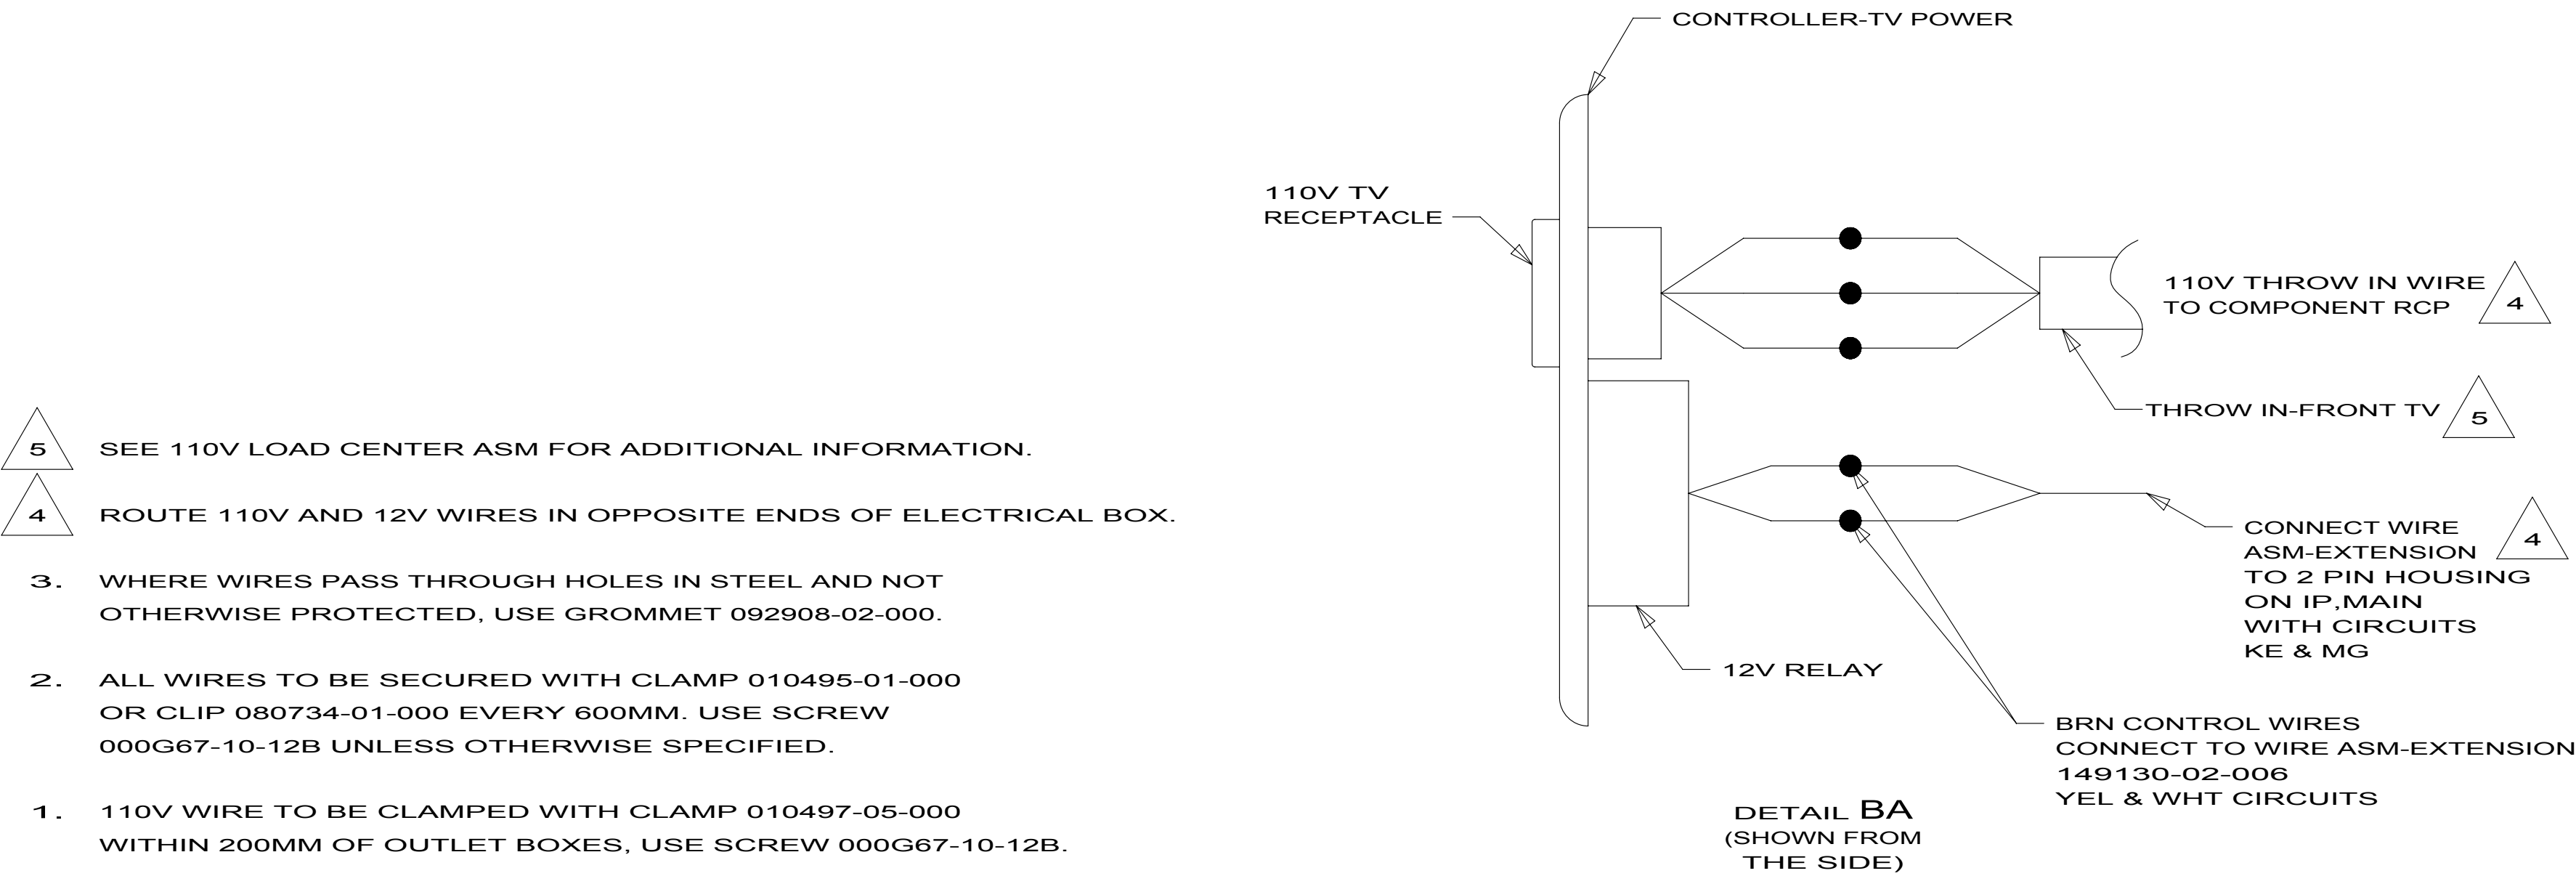

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 255 RADIO/AM/FM/CD/DVD PLAYER
- 19V RADIO-AM/FM STEREO CD PLAYER
- 40B INVERTER-DC/AC, 300 WATT
- 40A INVERTER-DC/AC WITHOUT
- 193 TV ANTENNA-AMPLIFIED SYSTEM
- 42K TV-32" COLOR,STEREO W/REMOTE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

10 E-SERIES

WIRING INSTL-TV/DVD

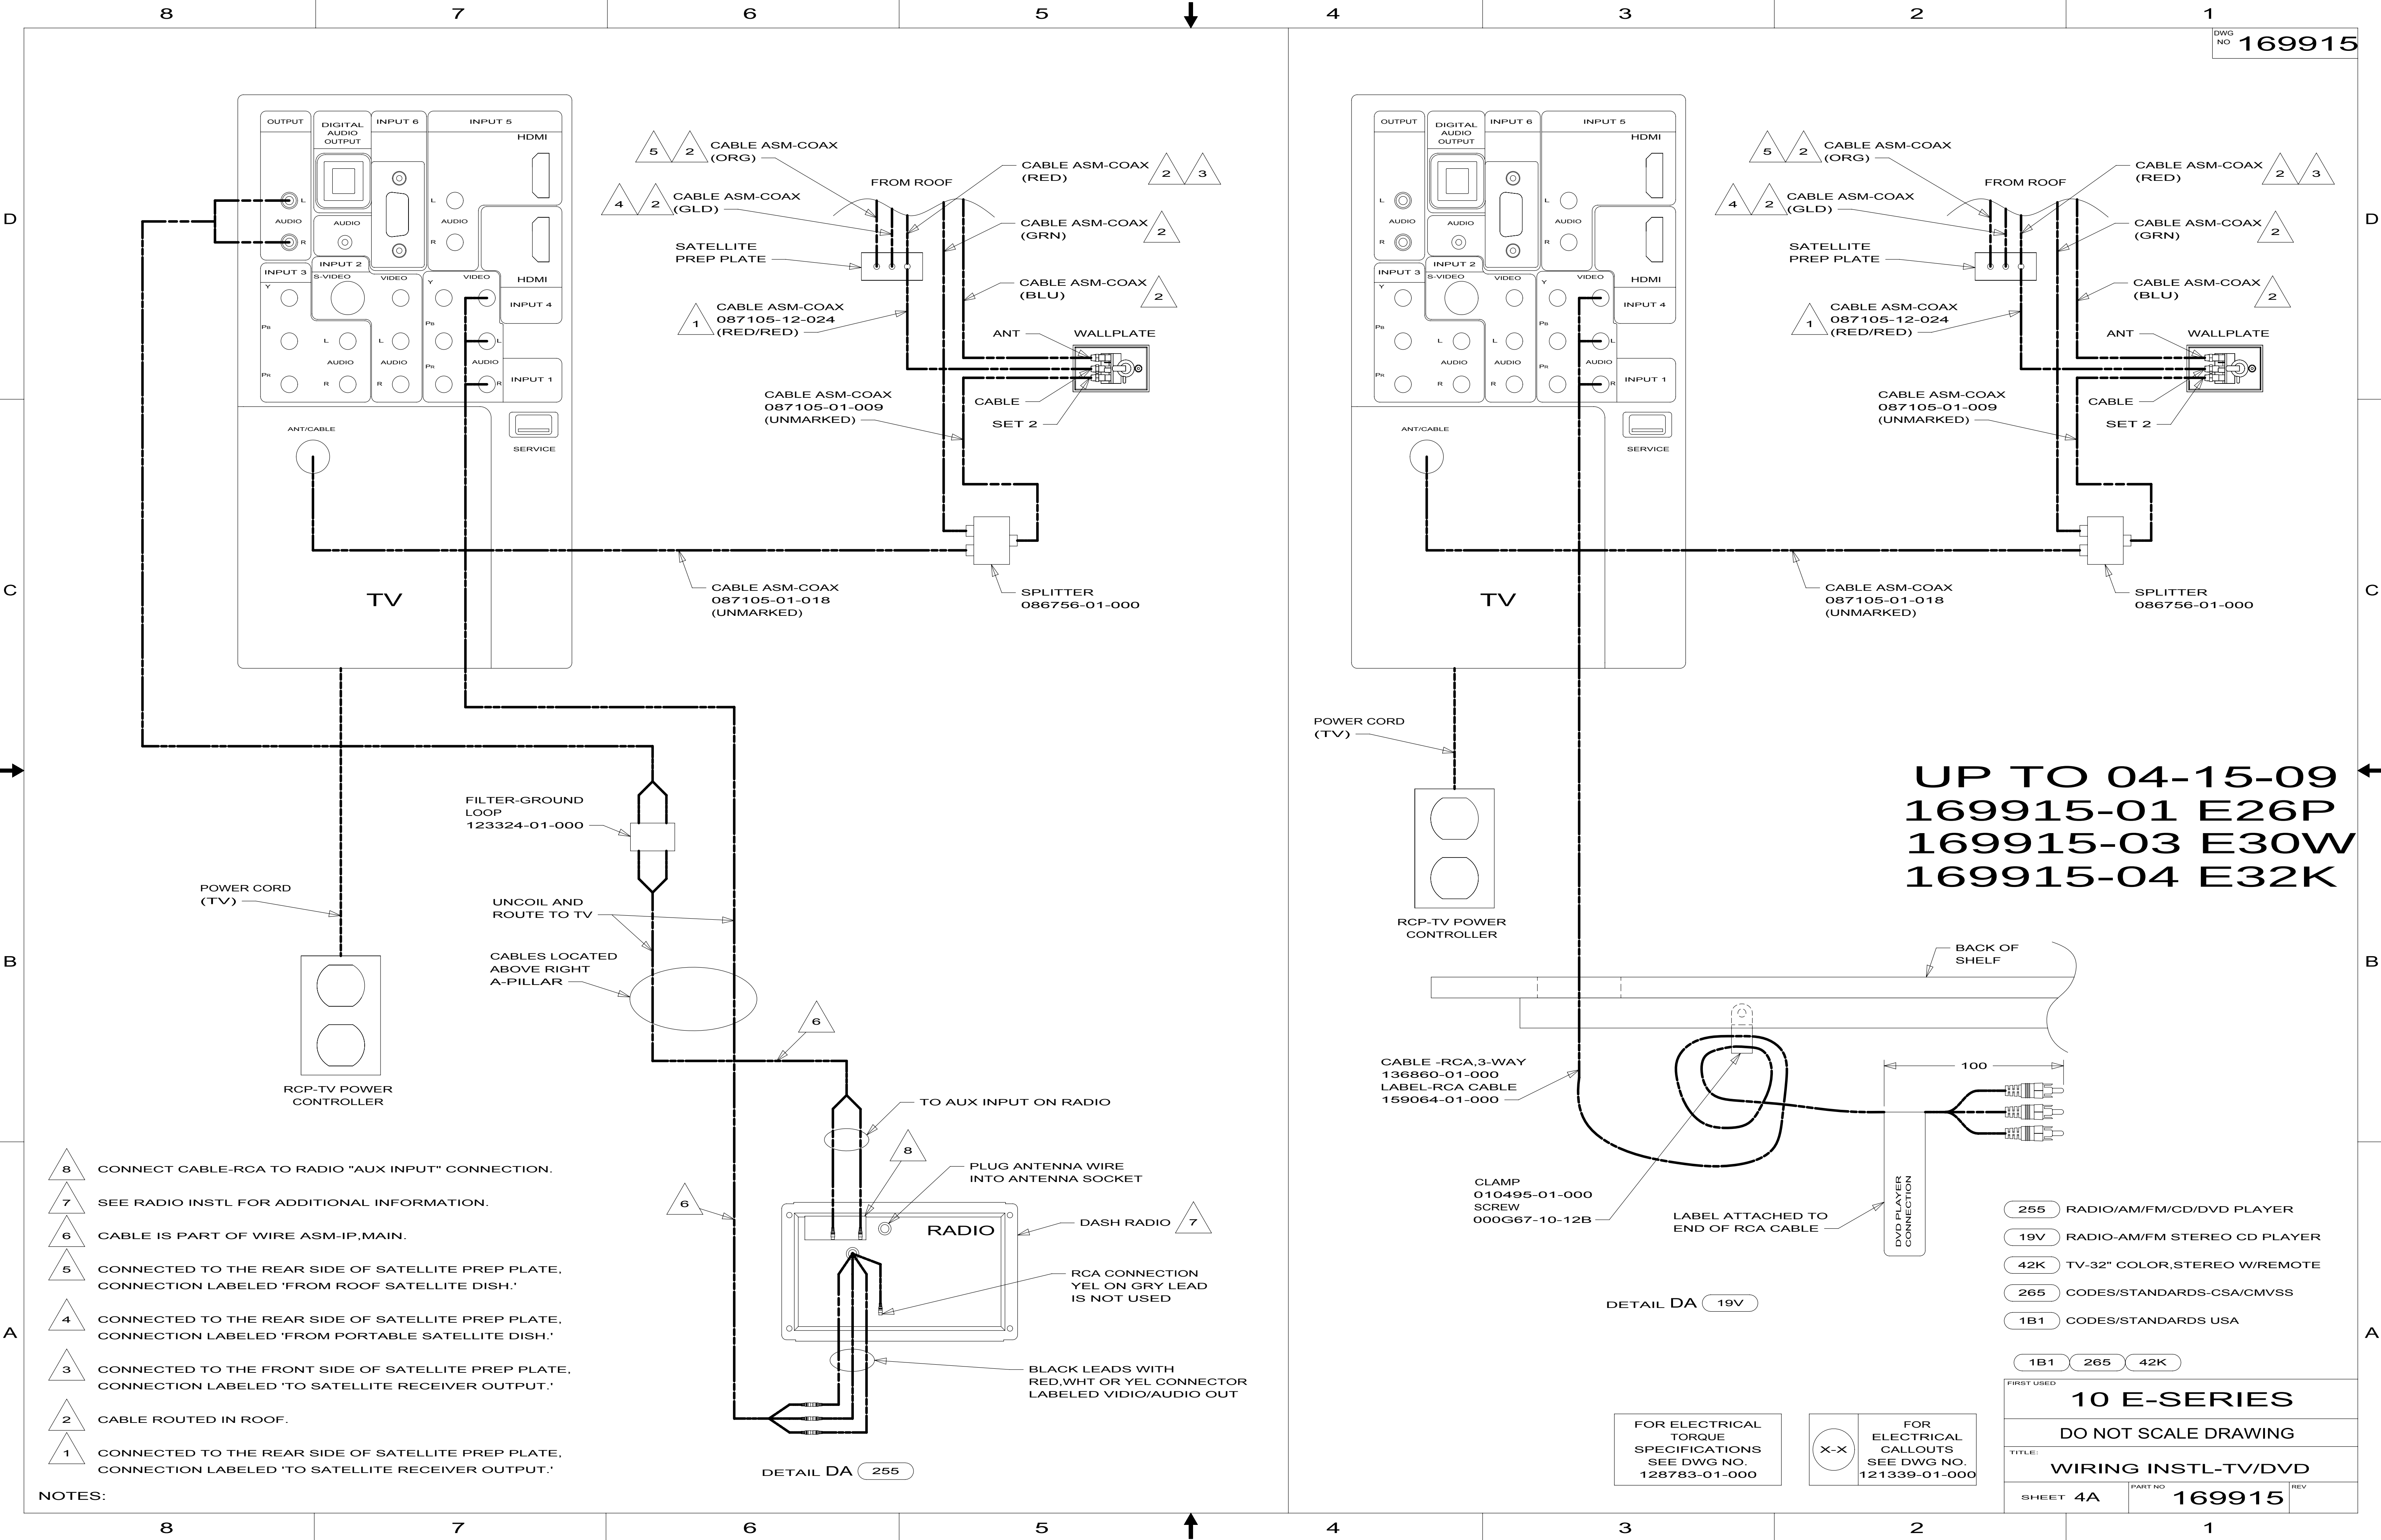


UP TO 04-15-09
169915-01 E26P
169915-03 E30W
169915-04 E32K


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED		
10 E-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-TV/DVD		
SHEET 4A	PART NO 169915	REV

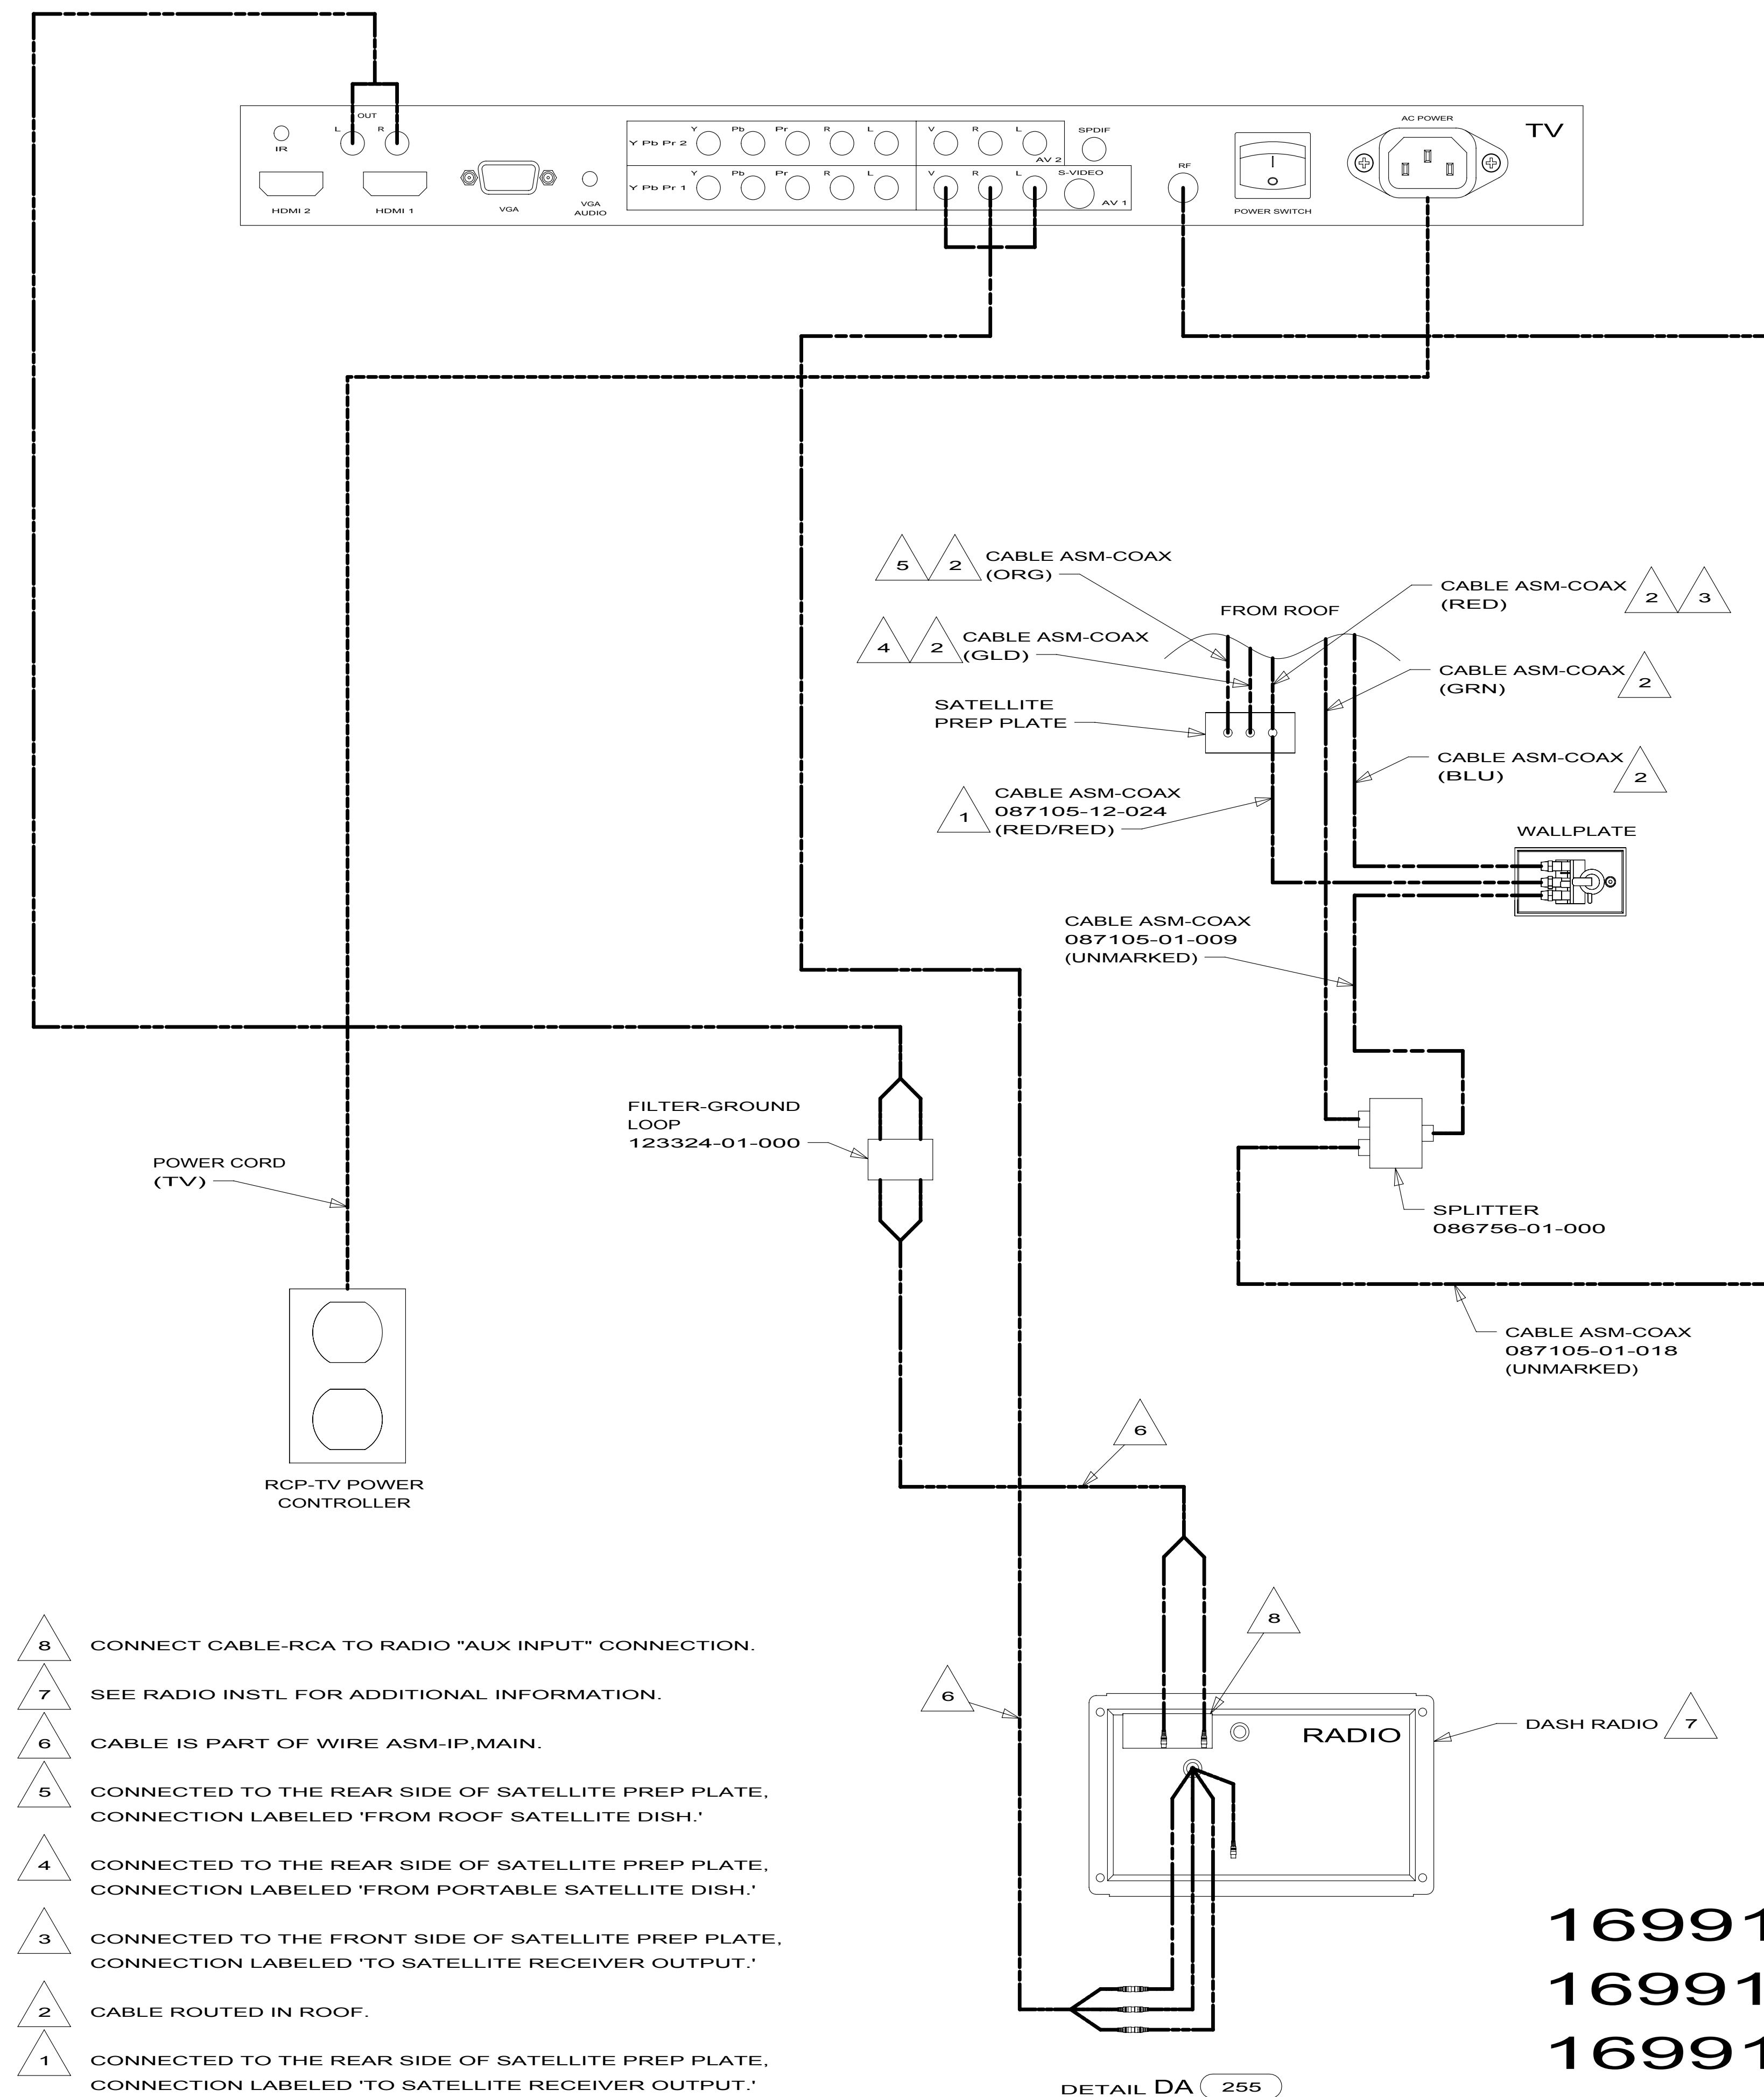

NOTES:

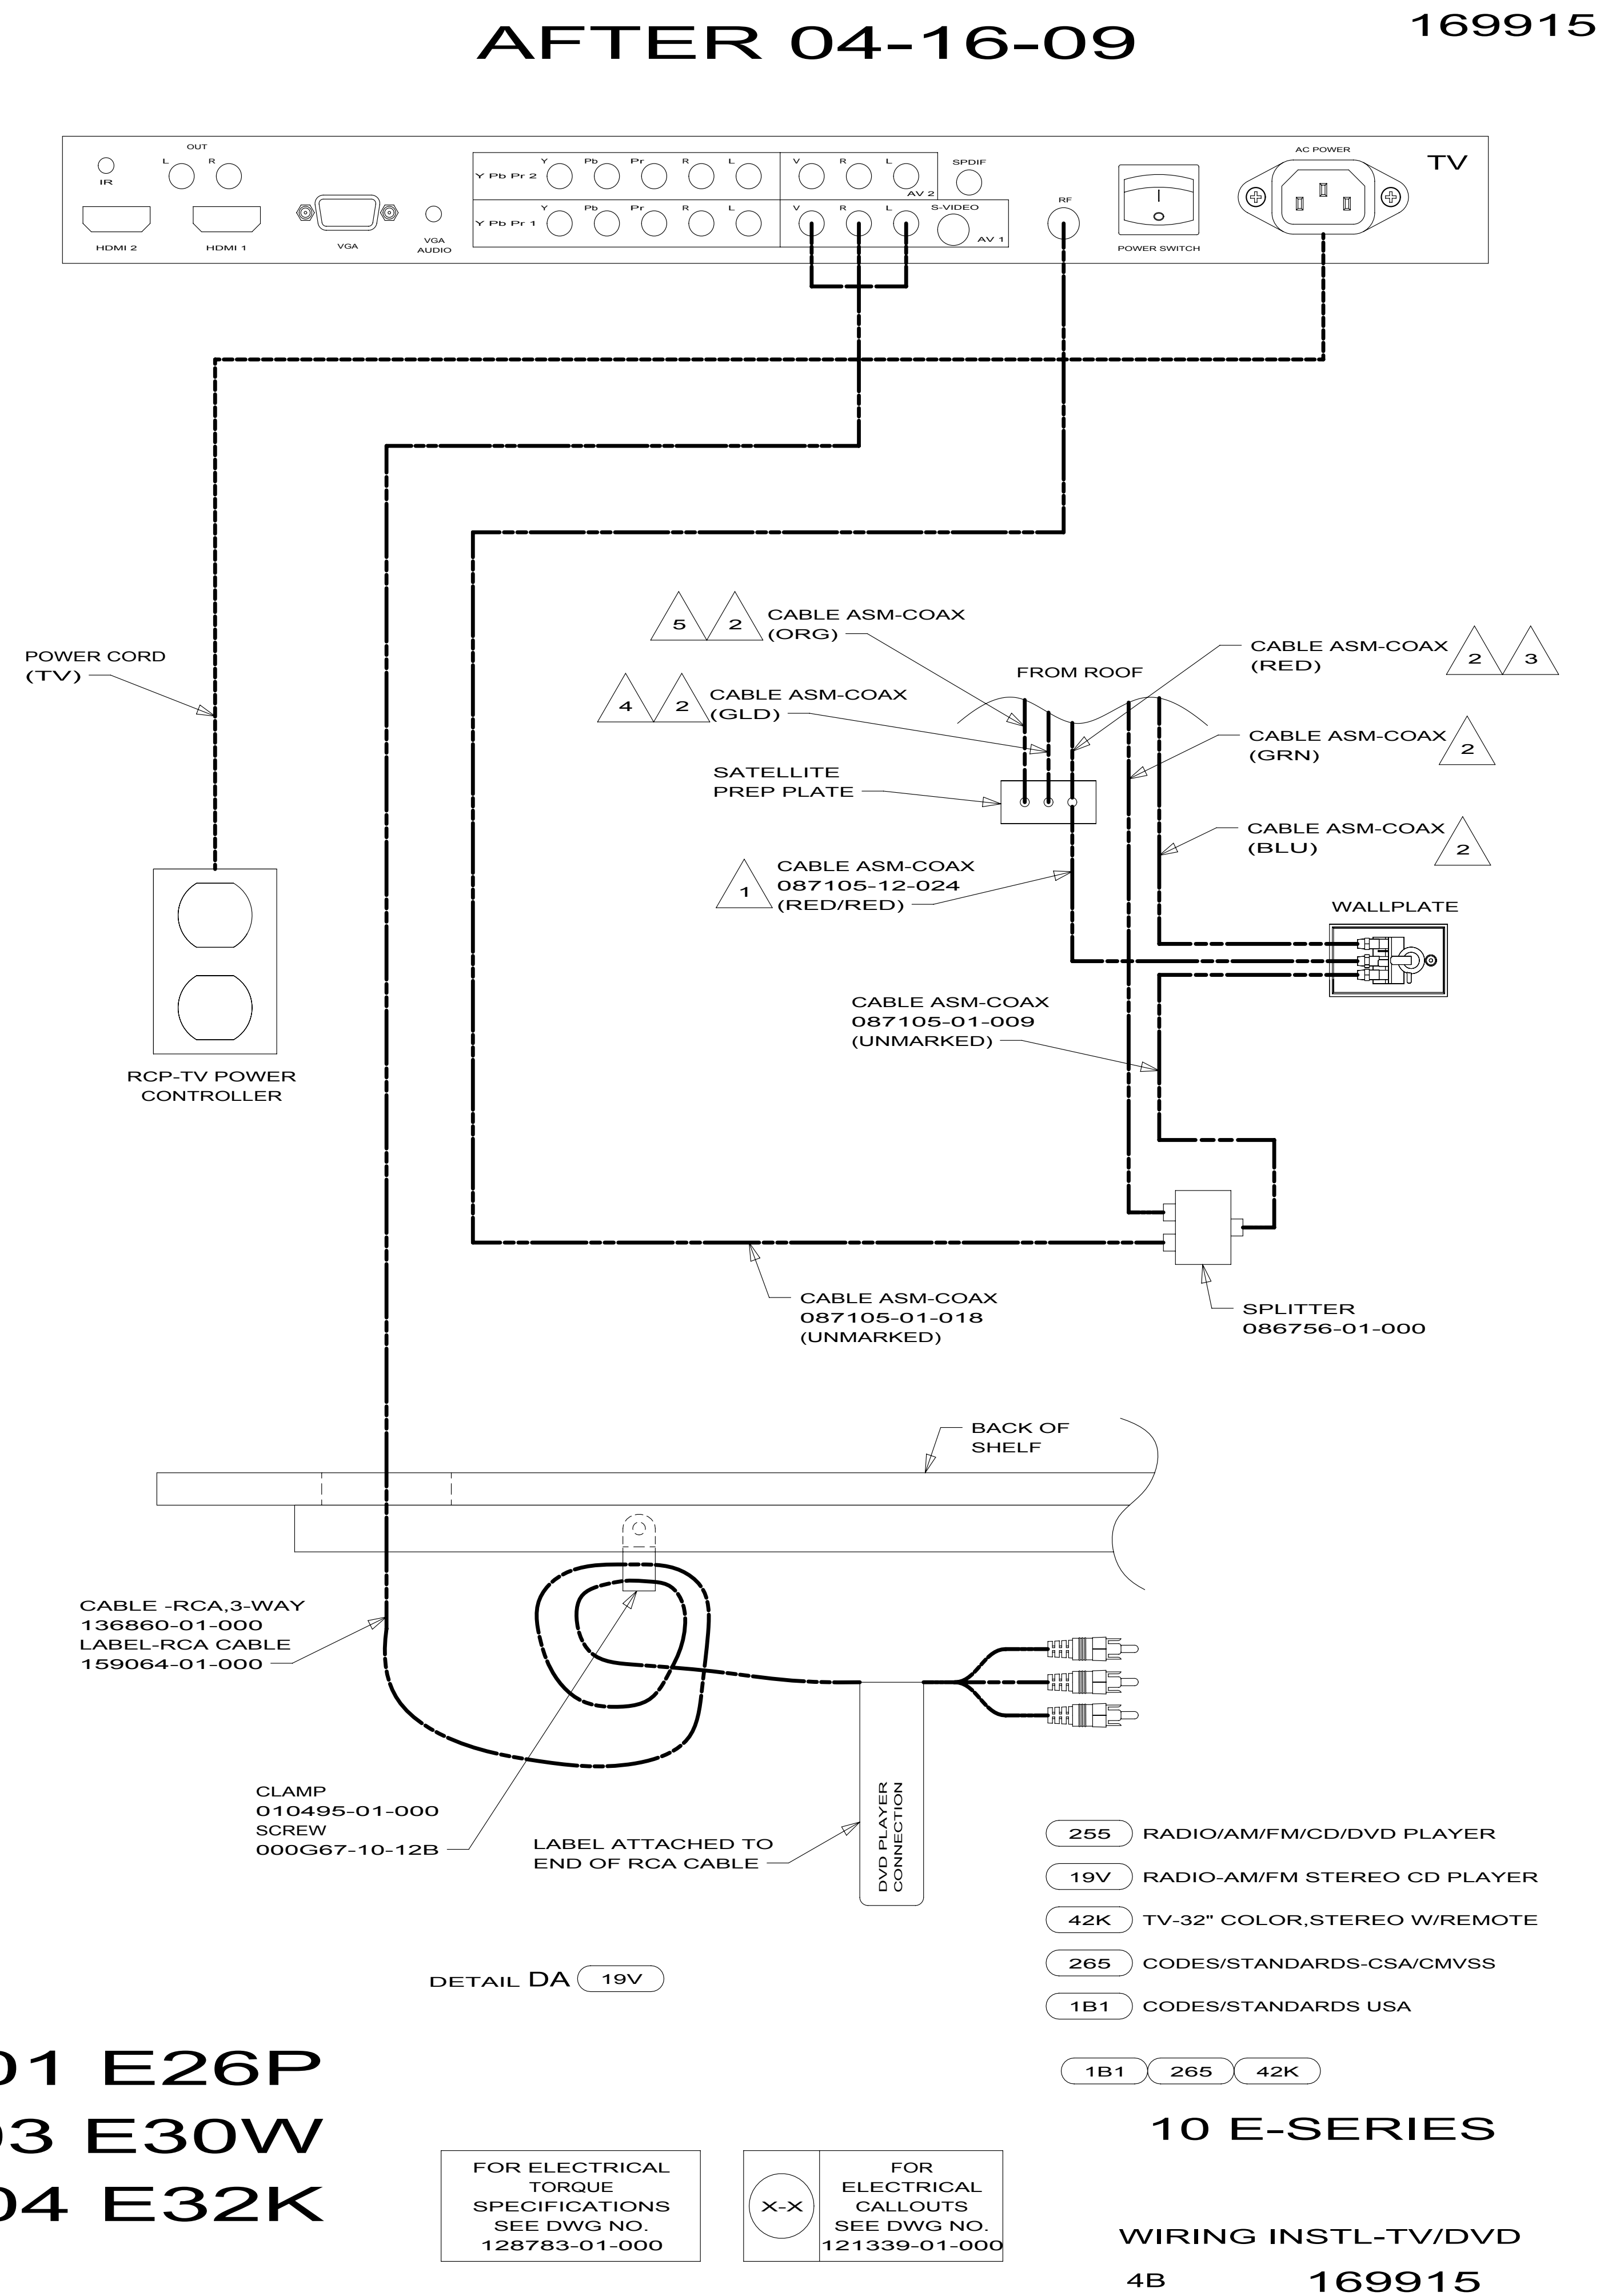

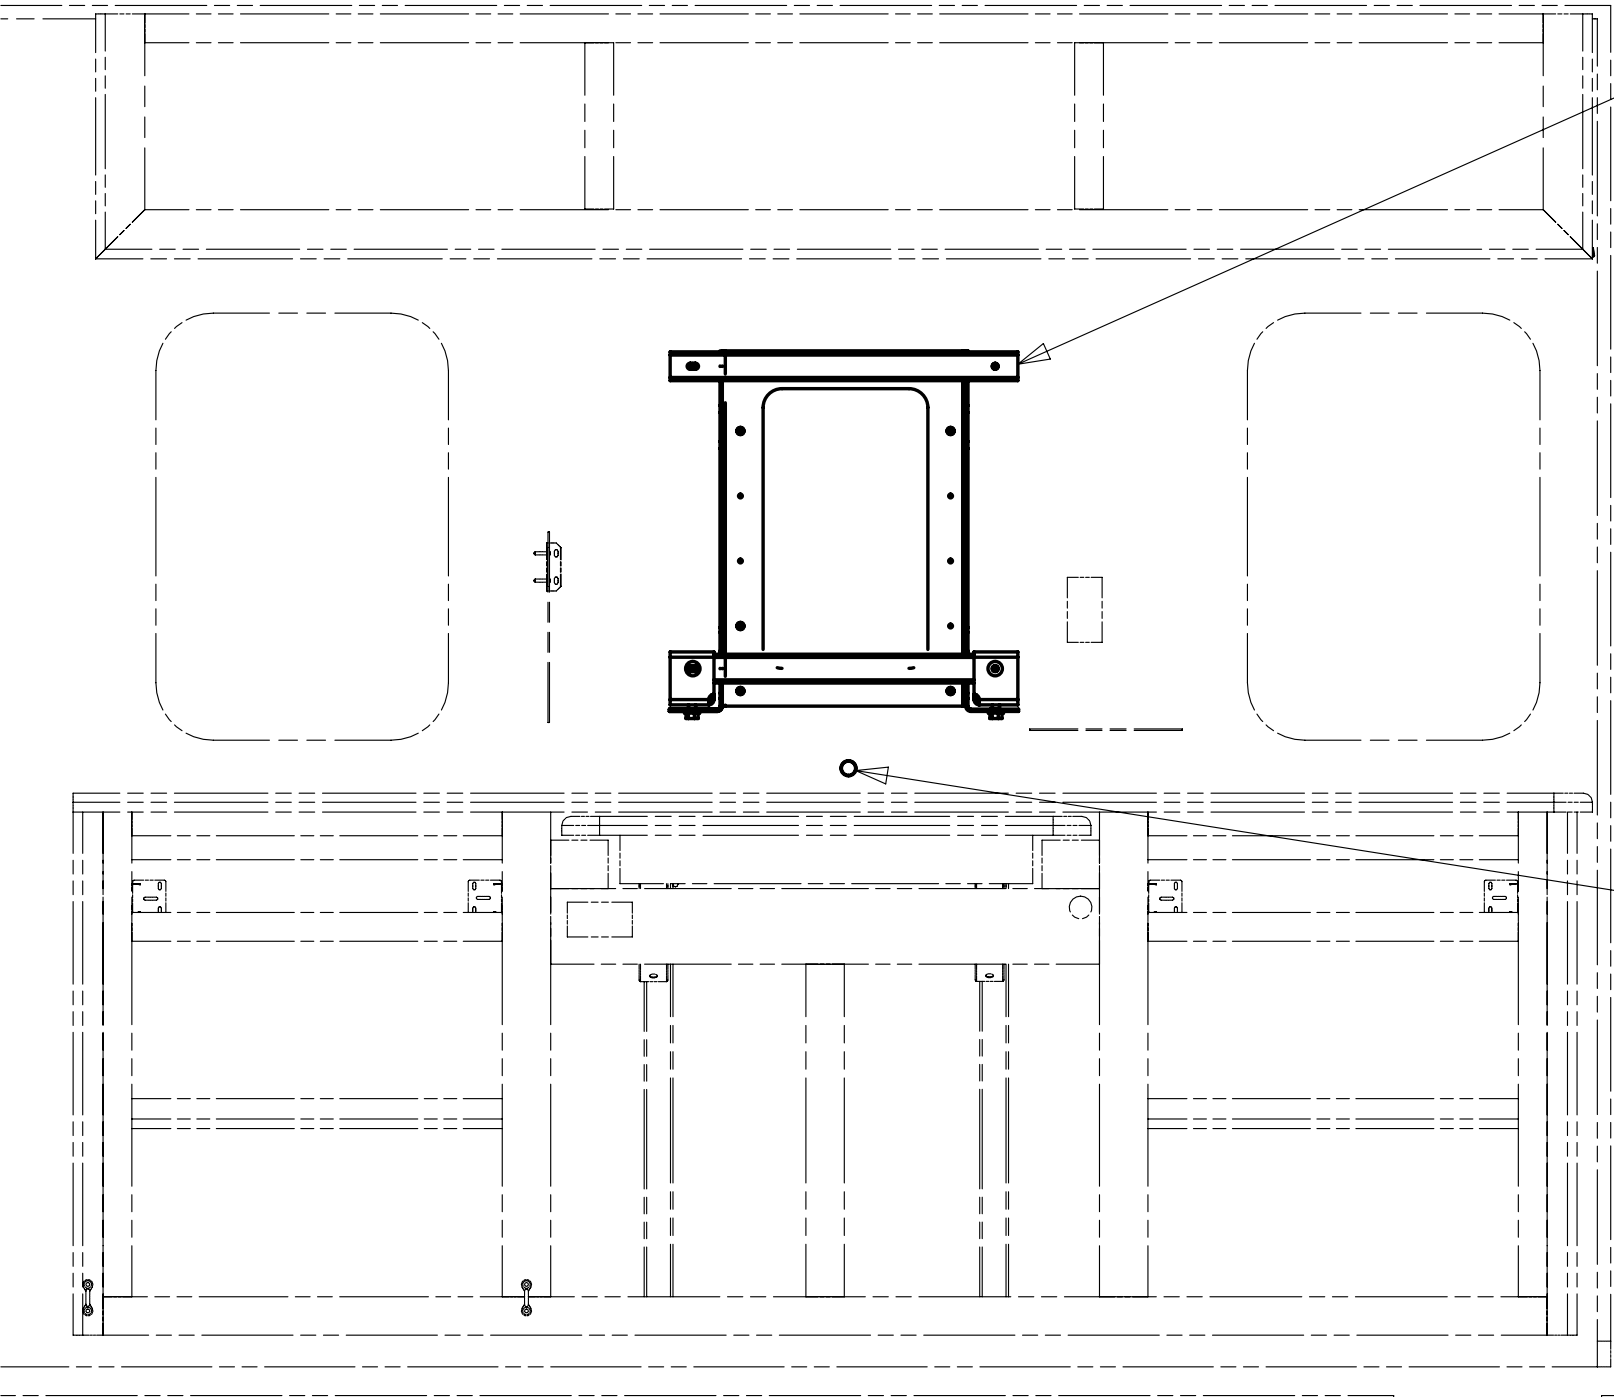

BRACKET-SUPPORT,TV SIDE
173551-01-02B
SCREW
000G39-10-12B (12)
TUBE-W/HOLES
169396-04-02B
SCREW
OMG02B-06-016 (2)
MOUNT ASM-TV,LOWER
173553-01-02B
SCREW
OMG02B-06-016 (2)
BOLT
140490-01-01A (2)

RECEIVER-INFRARED
149750-01-000

VIEW EA

RECEPTACLE-DOUBLE
172839-01-01A (UP TO 01-24-10)
RECEPTACLE-DOUBLE, FLUSH MOUNT
176149-01-01A (AFTER 01-25-10)
PLATE-COVER
176159-01-01A (AFTER 01-25-10)

193 PLATE-WALL,ANT/CABLE
176294-01-01A
SCREW
000G12-06-08T (2)

1B1 CONTROLLER-POWER
265 156676-01-000
BOX
133070-01-000
133070-02-000
SCREW
000G13-07-12B (4)
CONNECTOR
058028-01-000 (5)
TUBING-VINYL
8041-02-000 (150MM)
DETAIL BA

CROSSOVER COIL-
SPEAKER
150140-02-000
CLAMP-CLOSED
010497-02-000
SCREW
000G67-08-32B
CONNECTS TO
2 PIN HOUSING
ON WIRE ASM-ROOF

RECEPTACLE-DOUBLE
172839-01-01A (UP TO 01-24-10)
RECEPTACLE-DOUBLE, FLUSH MOUNT
176149-01-01A (AFTER 01-25-10)
PLATE-COVER
176159-01-01A (AFTER 01-25-10)

PLATE-WALL,
SATELLITE PREP
149557-04-02A
SCREW
000G67-10-08B (2)

GROMMET-EDGE LINER
114208-04-000


MODULE-INTERFACE,IR
149750-05-000
SCREW
000G67-08-32B (4)

19V GROMMET-EDGE, LINER
255 114208-04-000
PLUG-PLASTIC
061420-15-000

SPLITTER-TV,2 WAY
086756-01-000
SCREW
000G67-08-32B (2)

CROSSOVER NETWORK
BX-SPEAKER
150140-01-000
CONNECTS TO (2)
4 PIN HOUSINGS
FROM WIRE ASM-ROOF

TV-40",FLAT PANEL LCD
173511-01-000

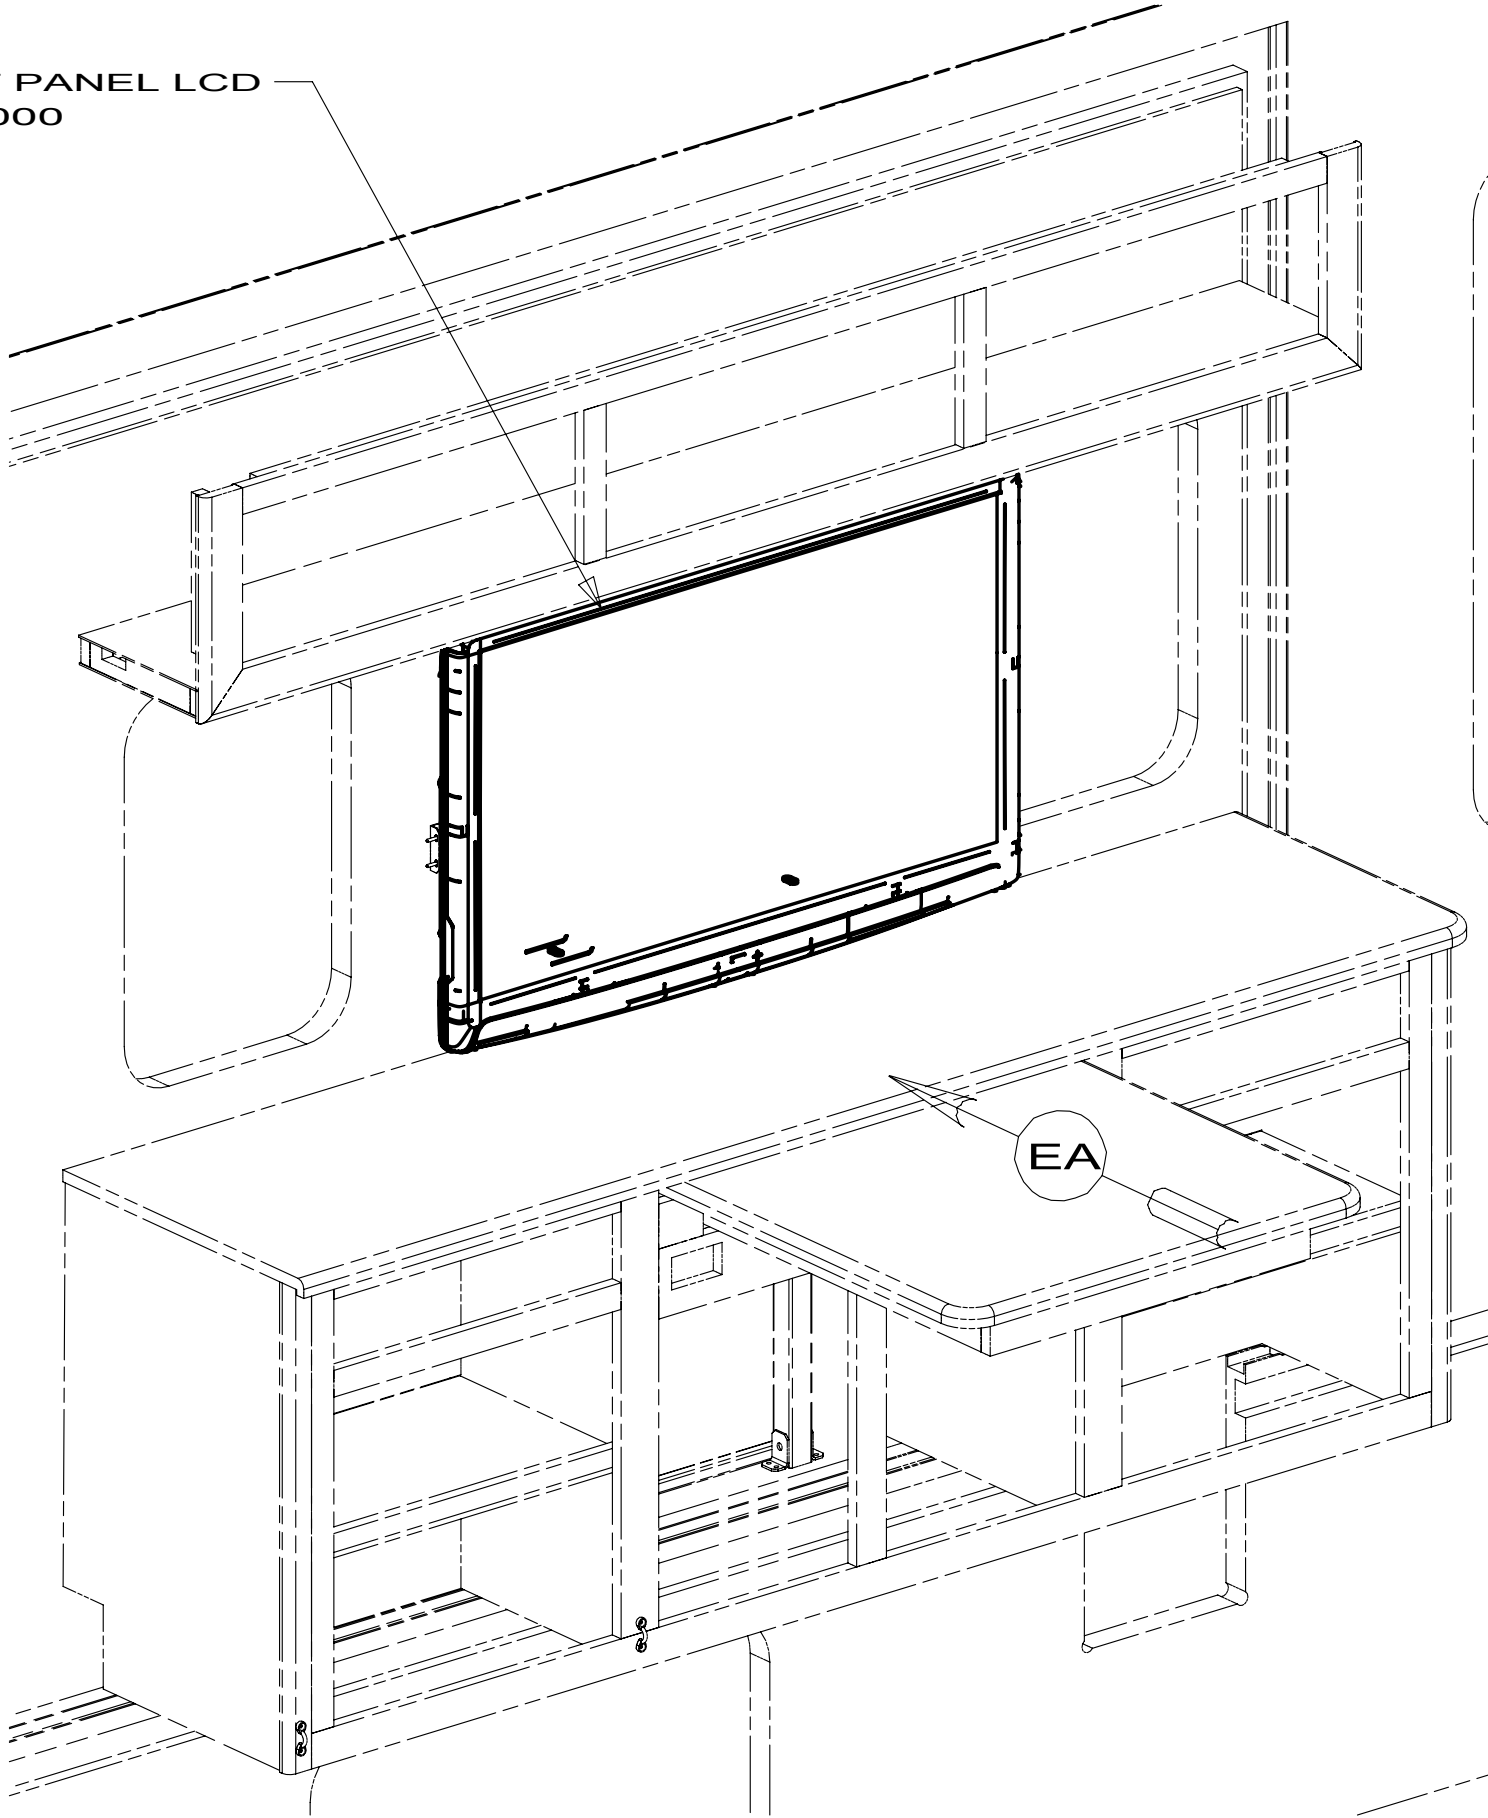

EA

169915-03 E30W

255 RADIO/AM/FM/CD/DVD PLAYER

40B INVERTER-DC/AC, 300 WATT

40A INVERTER-DC/AC WITHOUT

193 TV ANTENNA-AMPLIFIED SYSTEM

1H5 TV, FRONT-WITHOUT

21W DINING/BUFFET/TV

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 21W 1H5


10 E-SERIES



WIRING INSTL-TV/DVD

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

169915-03 E30W

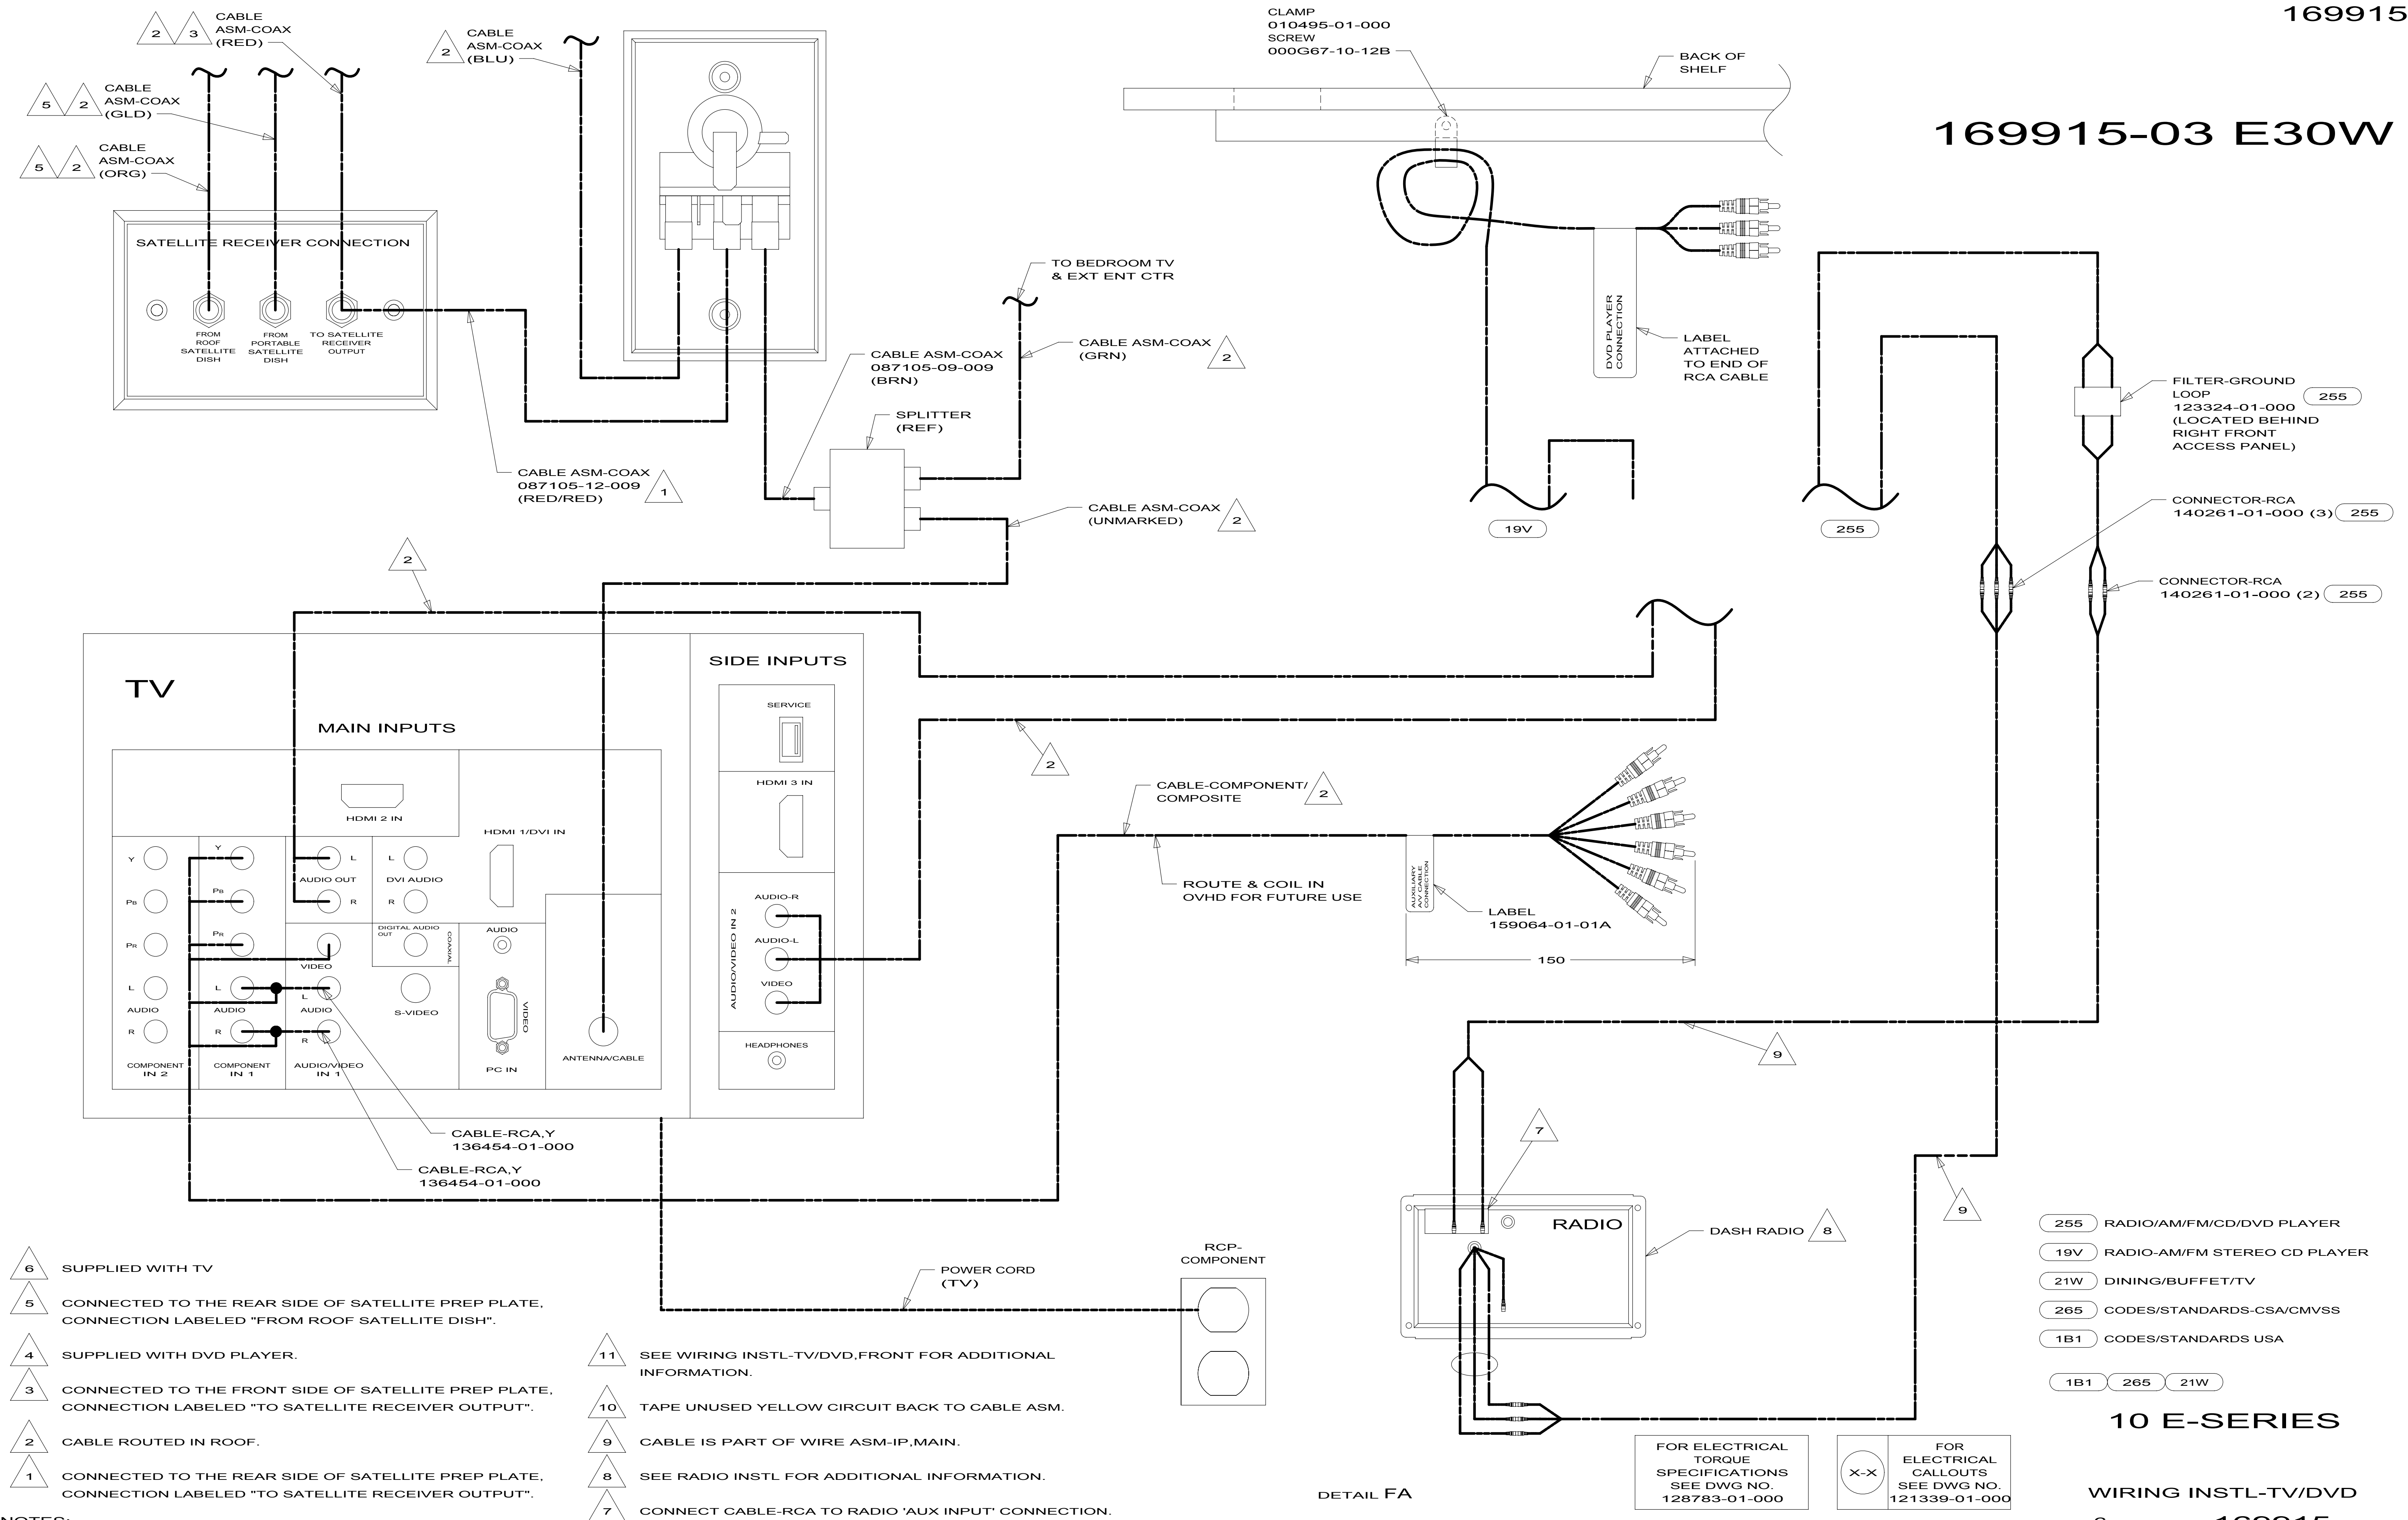

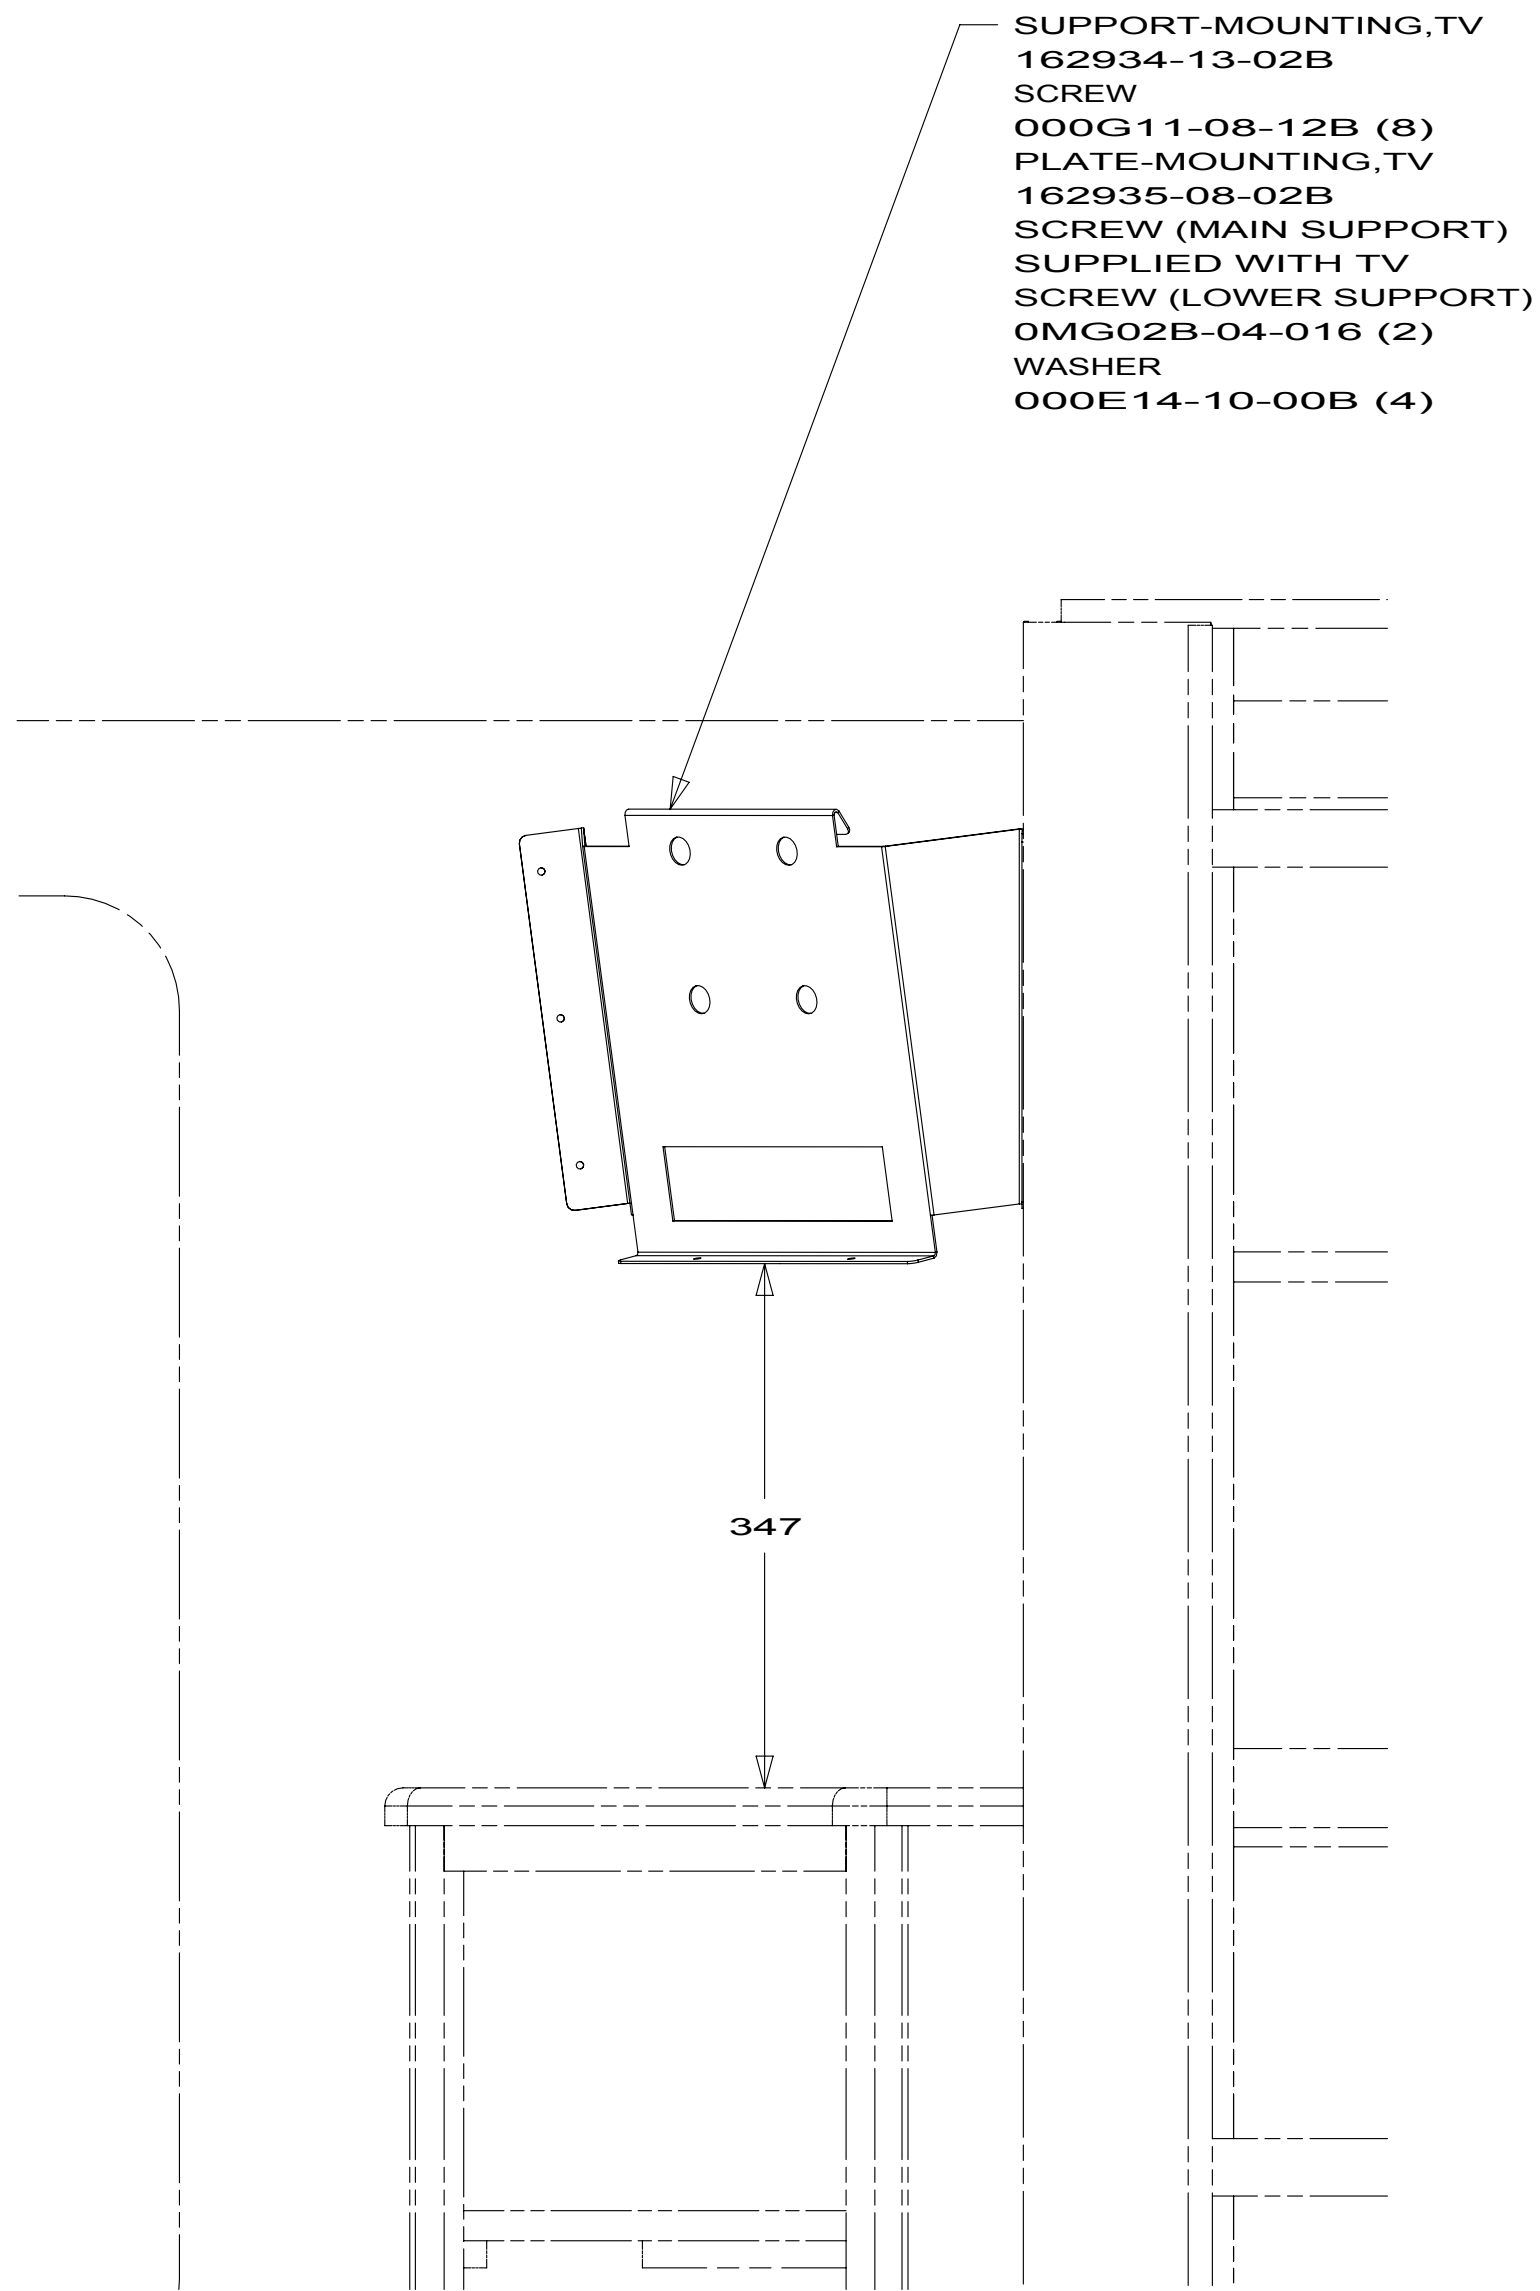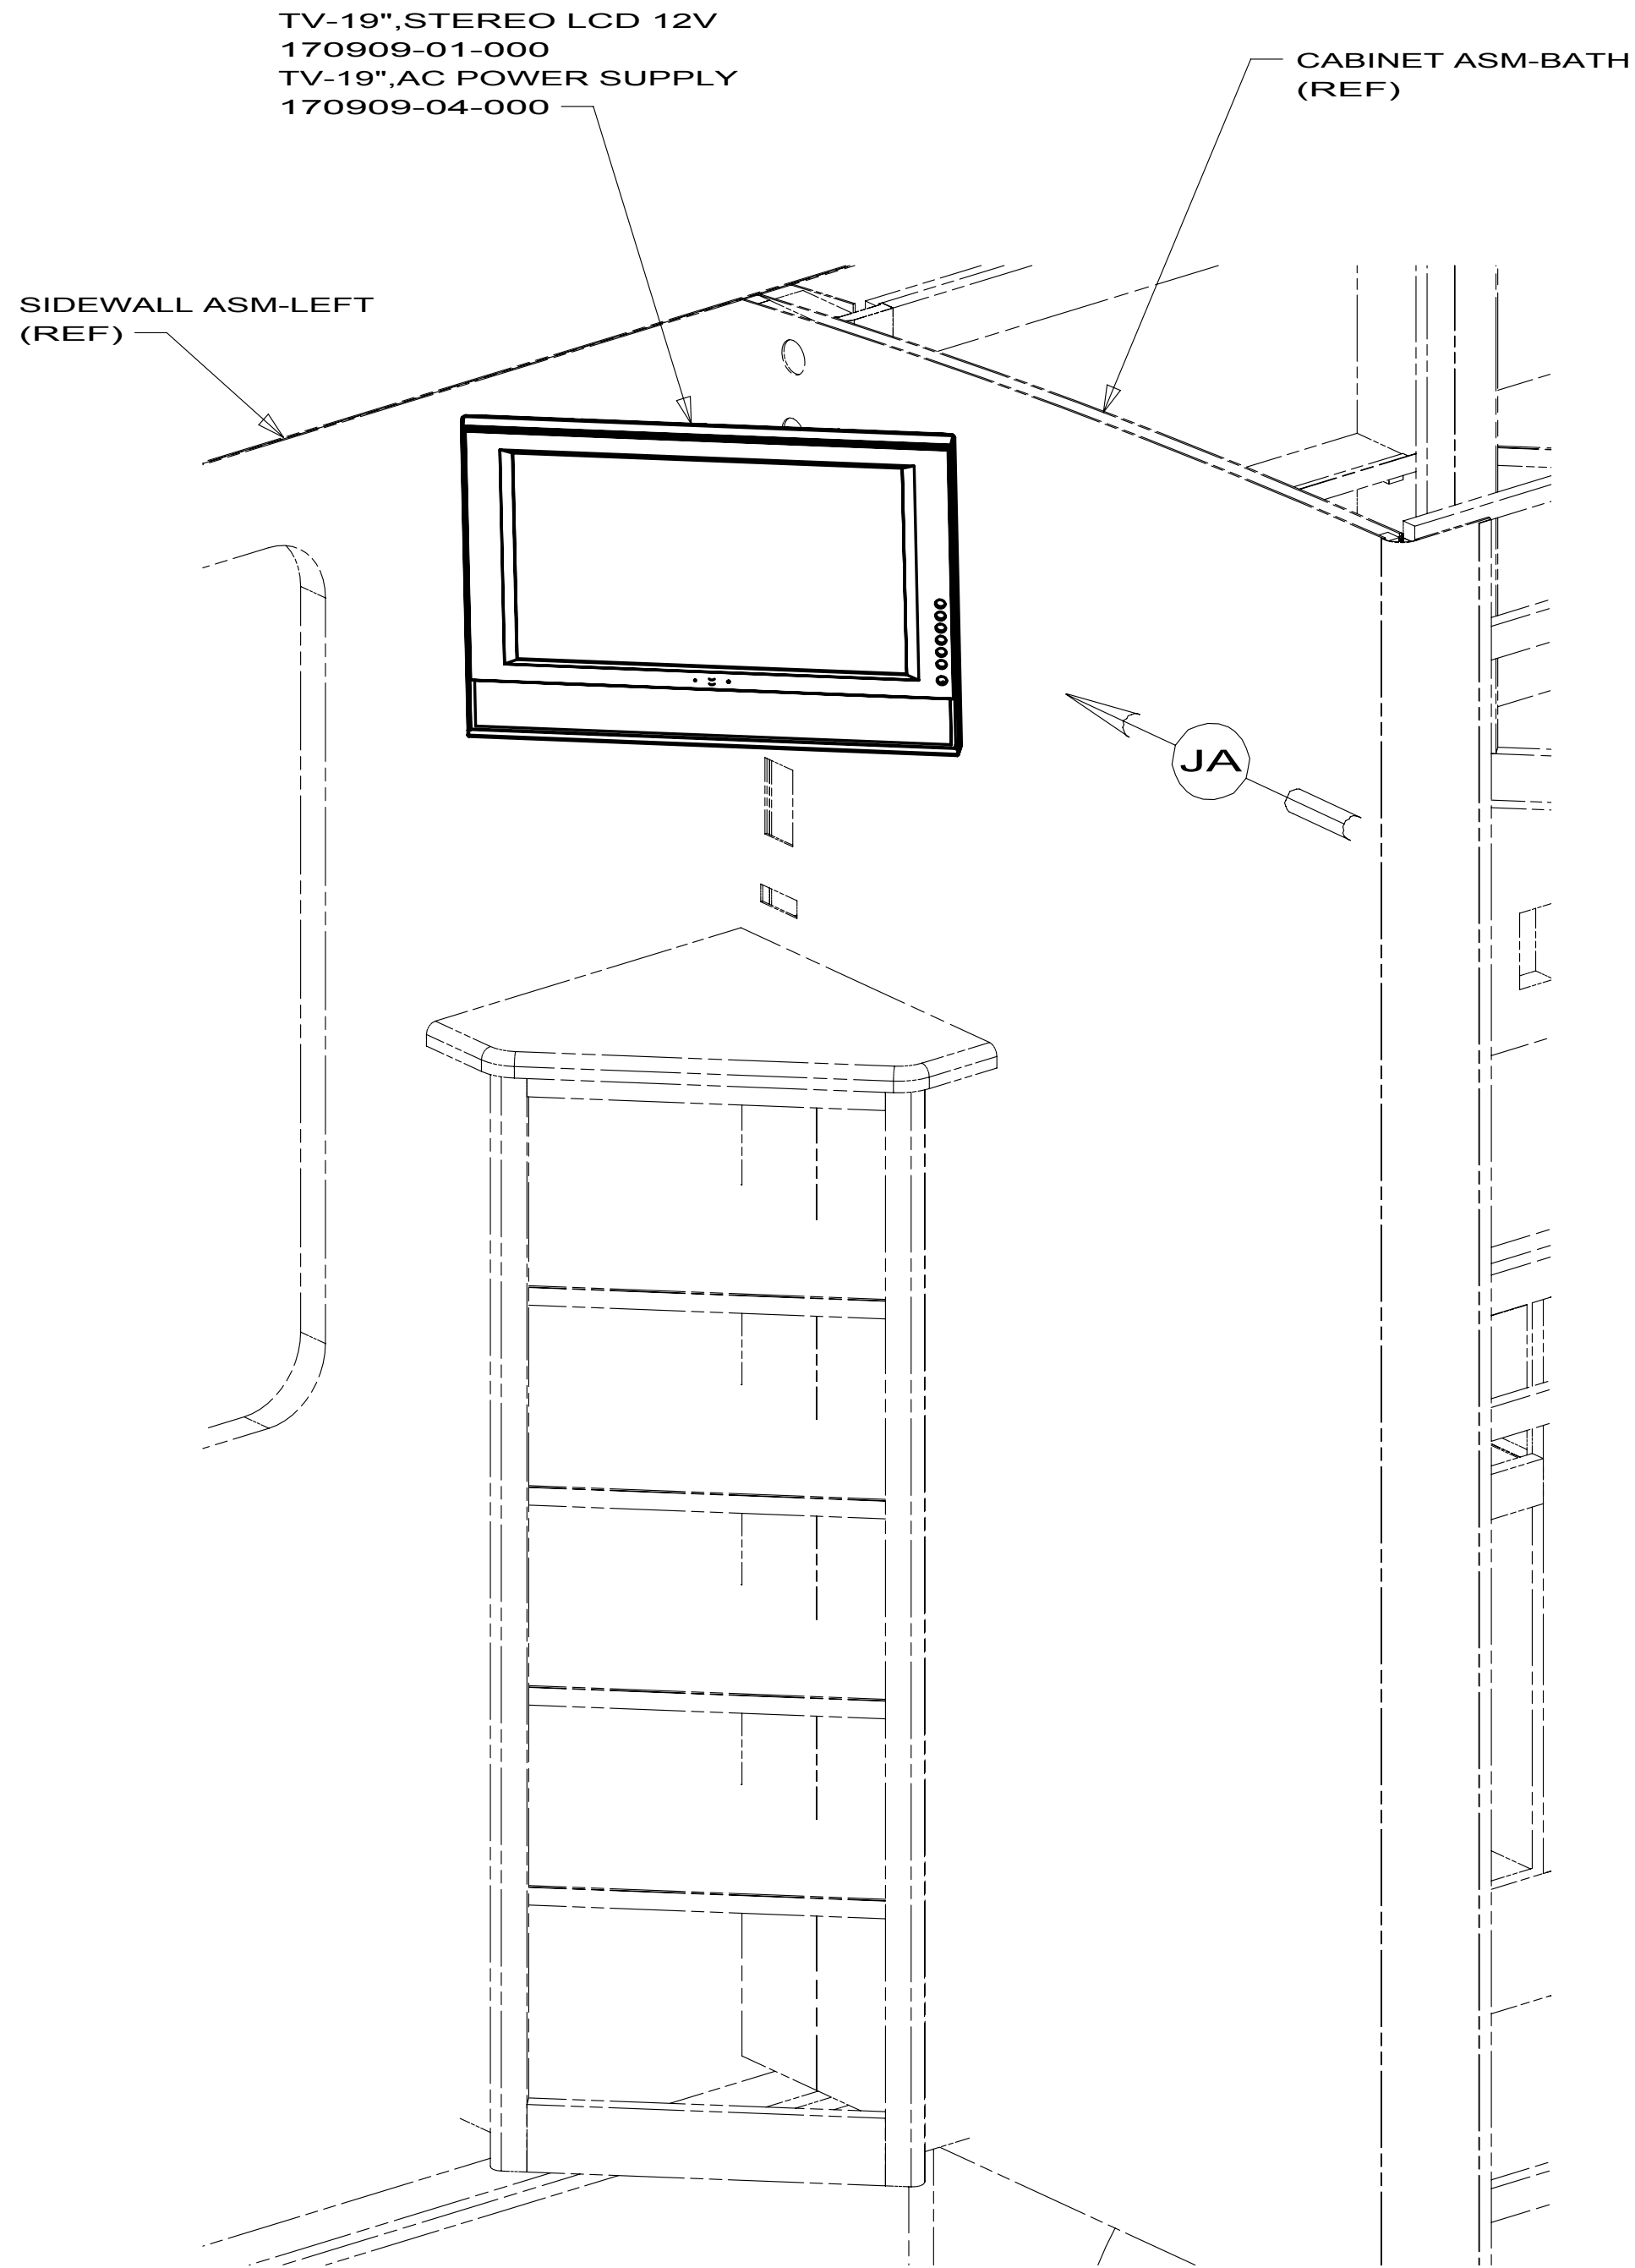

VIEW JA

169915-03 E30W

1JU TV (REAR)-19"COLOR, STEREO

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 1JU

10 E-SERIES

WIRING INSTL-TV/DVD

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

KEY	PART NUMBER	U/M	DESCRIPTION
	169154-01-700	EA	REMOTE - TV

169151-01-000, 169151-02-000
VENDOR NO.
RRMCGA667WJSA

KEY	PART NUMBER	U/M	DESCRIPTION
	170909-01-700	EA	REMOTE - SERVICE PACK

170909-01-000
VENDOR NO.
PSVCJE1909

KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	173556-01-700	EA REMOTE - SERVICE PACK	PSVCJE3208