



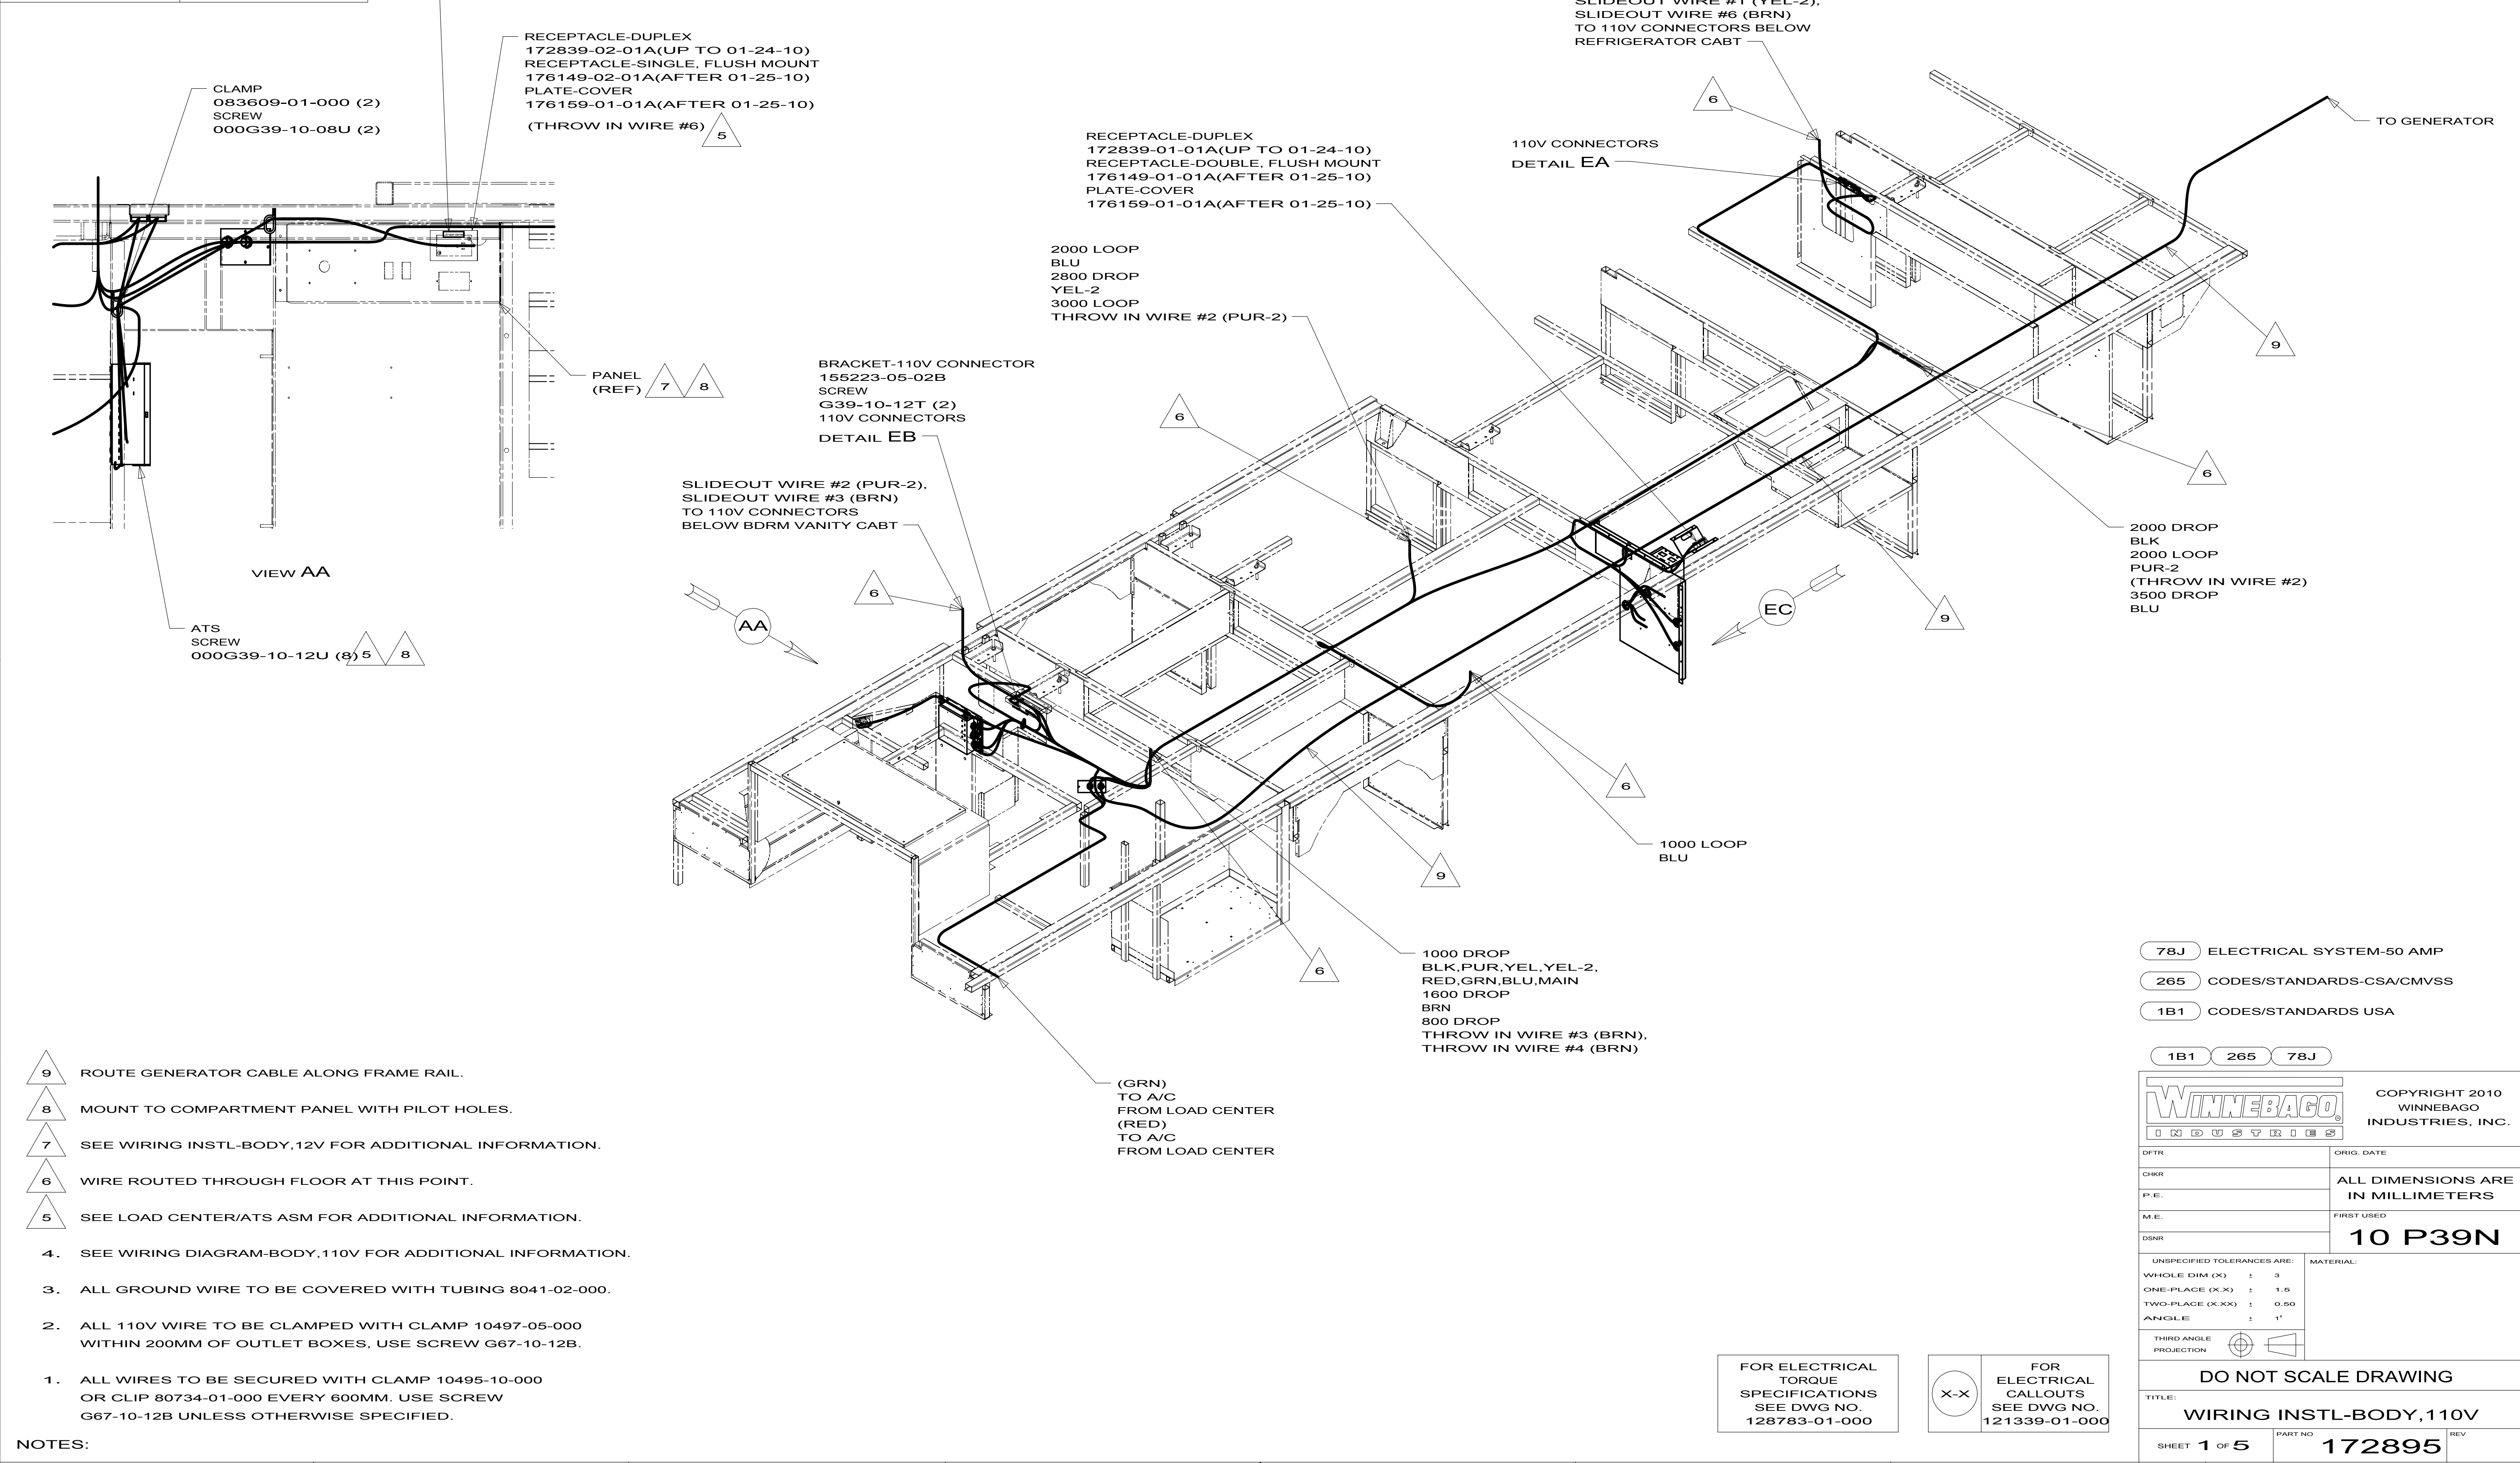

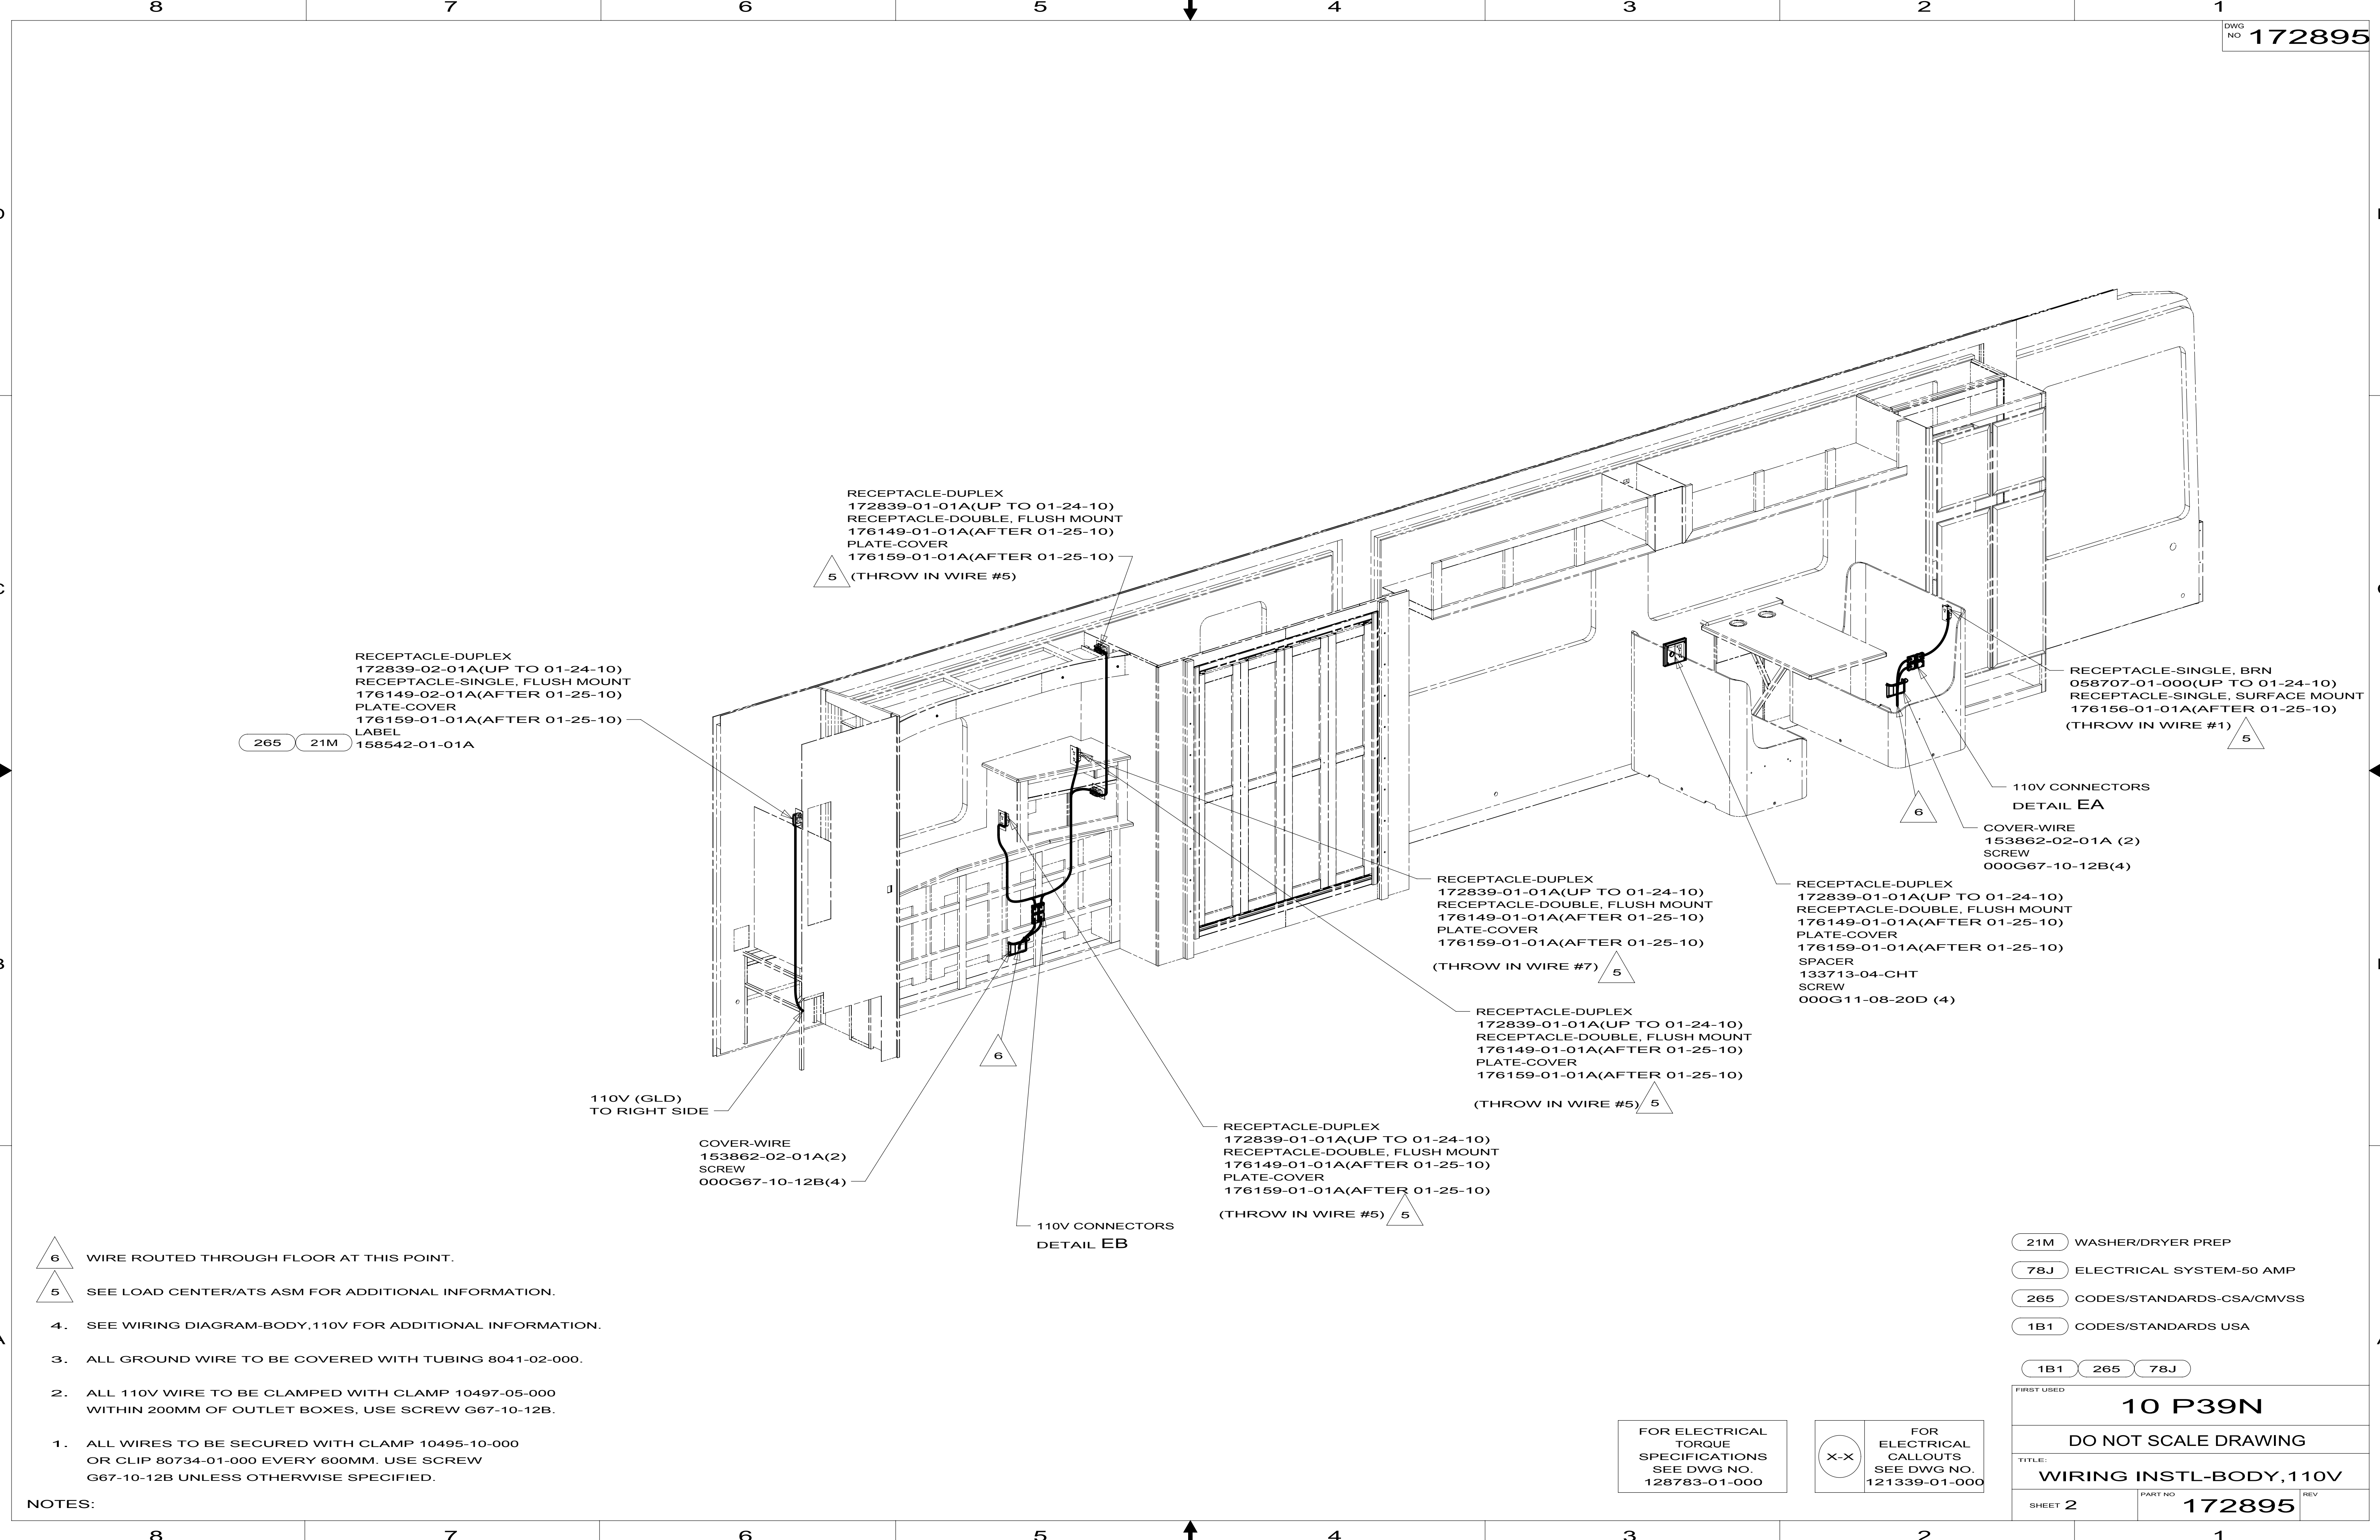

8 7 6 5 4 3 2 1

D

C

B

A

8 7 6 5 4 3 2 1

172895

RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE, FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)
5 (THROW IN WIRE #5)

RECEPTACLE-DUPLEX
172839-02-01A(UP TO 01-24-10)
RECEPTACLE-SINGLE, FLUSH MOUNT
176149-02-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)
LABEL
158542-01-01A
265 21M

RECEPTACLE-SINGLE, BRN
058707-01-000(UP TO 01-24-10)
RECEPTACLE-SINGLE, SURFACE MOUNT
176156-01-01A(AFTER 01-25-10)
(THROW IN WIRE #1) 5

110V CONNECTORS
DETAIL EA

COVER-WIRE
153862-02-01A (2)
SCREW
000G67-10-12B(4)

RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE, FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)
(THROW IN WIRE #7) 5

RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE, FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)
(THROW IN WIRE #5) 5

RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE, FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)
(THROW IN WIRE #5) 5

110V (GLD)
TO RIGHT SIDE

COVER-WIRE
153862-02-01A(2)
SCREW
000G67-10-12B(4)

110V CONNECTORS
DETAIL EB

6 WIRE ROUTED THROUGH FLOOR AT THIS POINT.

5 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

4. SEE WIRING DIAGRAM-BODY,110V FOR ADDITIONAL INFORMATION.

3. ALL GROUND WIRE TO BE COVERED WITH TUBING 8041-02-000.

2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000
WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.

1. ALL WIRES TO BE SECURED WITH CLAMP 10495-10-000
OR CLIP 80734-01-000 EVERY 600MM. USE SCREW
G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

21M WASHER/DRYER PREP

78J ELECTRICAL SYSTEM-50 AMP

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 78J

FIRST USED

10 P39N

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-BODY,110V


SHEET 2 PART NO. 172895 REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

3/11/2010

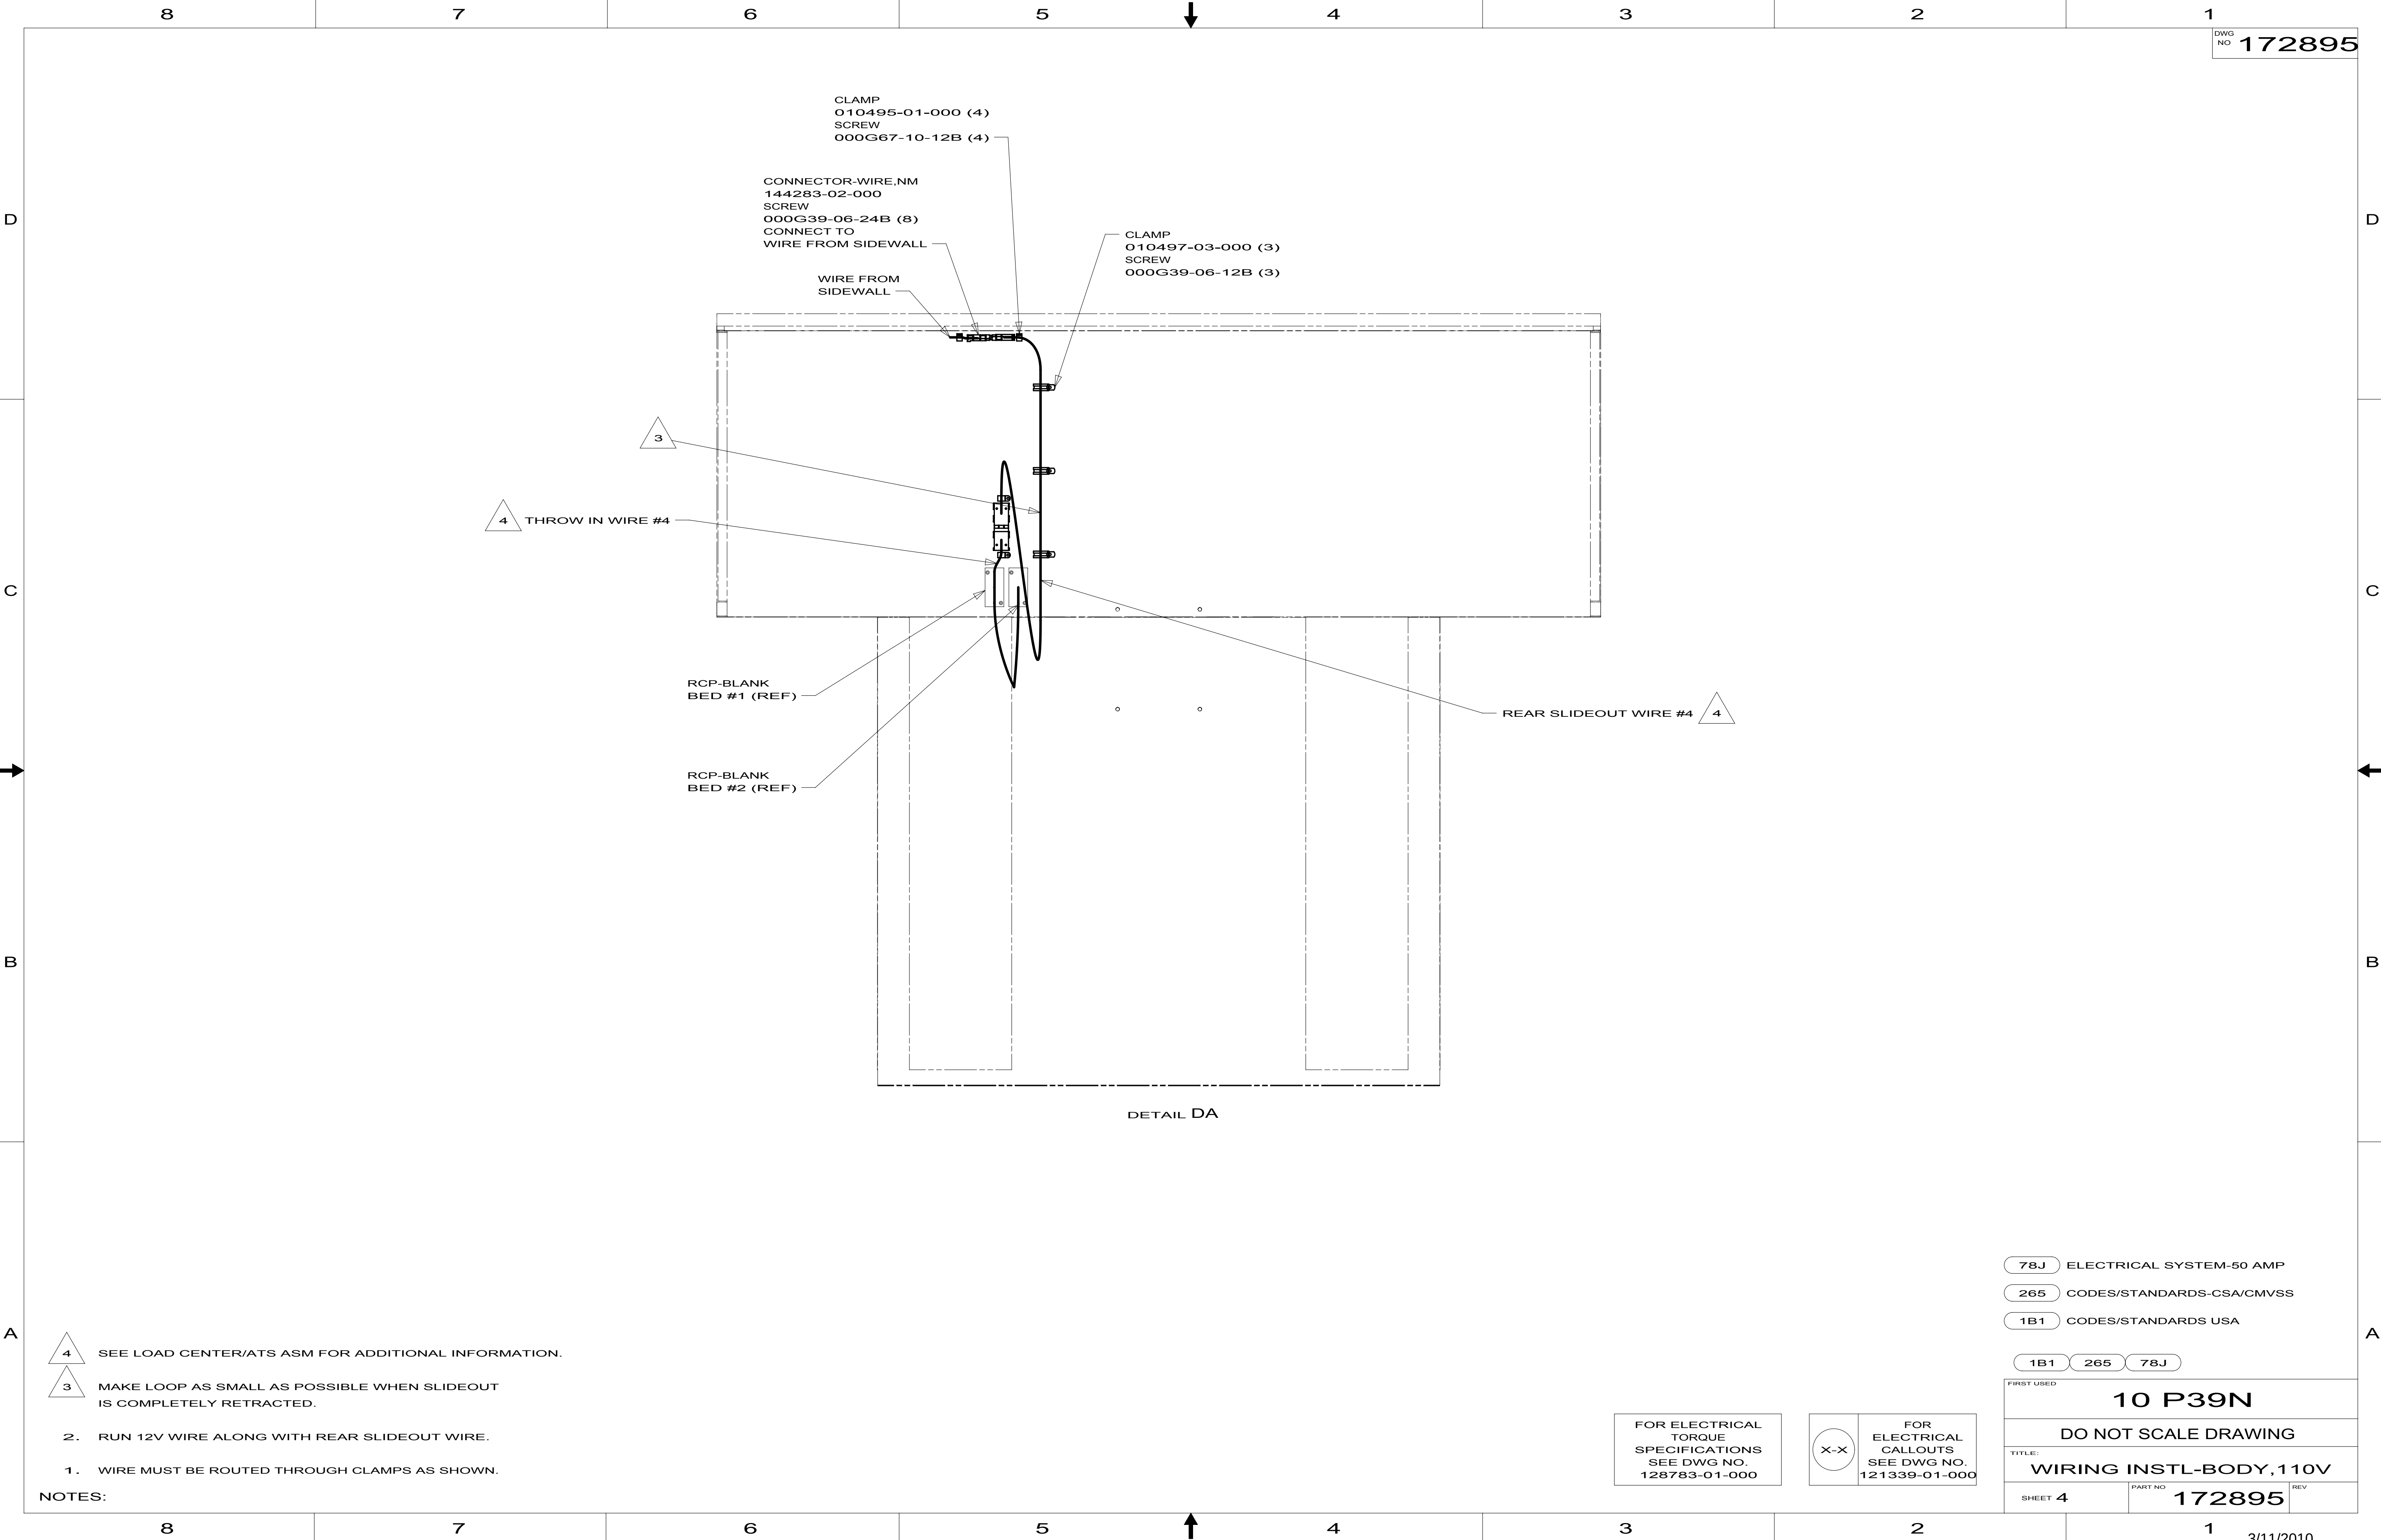

- 4 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 3 MAKE LOOP AS SMALL AS POSSIBLE WHEN SLIDEOUT IS COMPLETELY RETRACTED.
2. RUN 12V WIRE ALONG WITH REAR SLIDEOUT WIRE.
1. WIRE MUST BE ROUTED THROUGH CLAMPS AS SHOWN.

NOTES:








- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 78J

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,110V		
SHEET 4	PART NO 172895	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

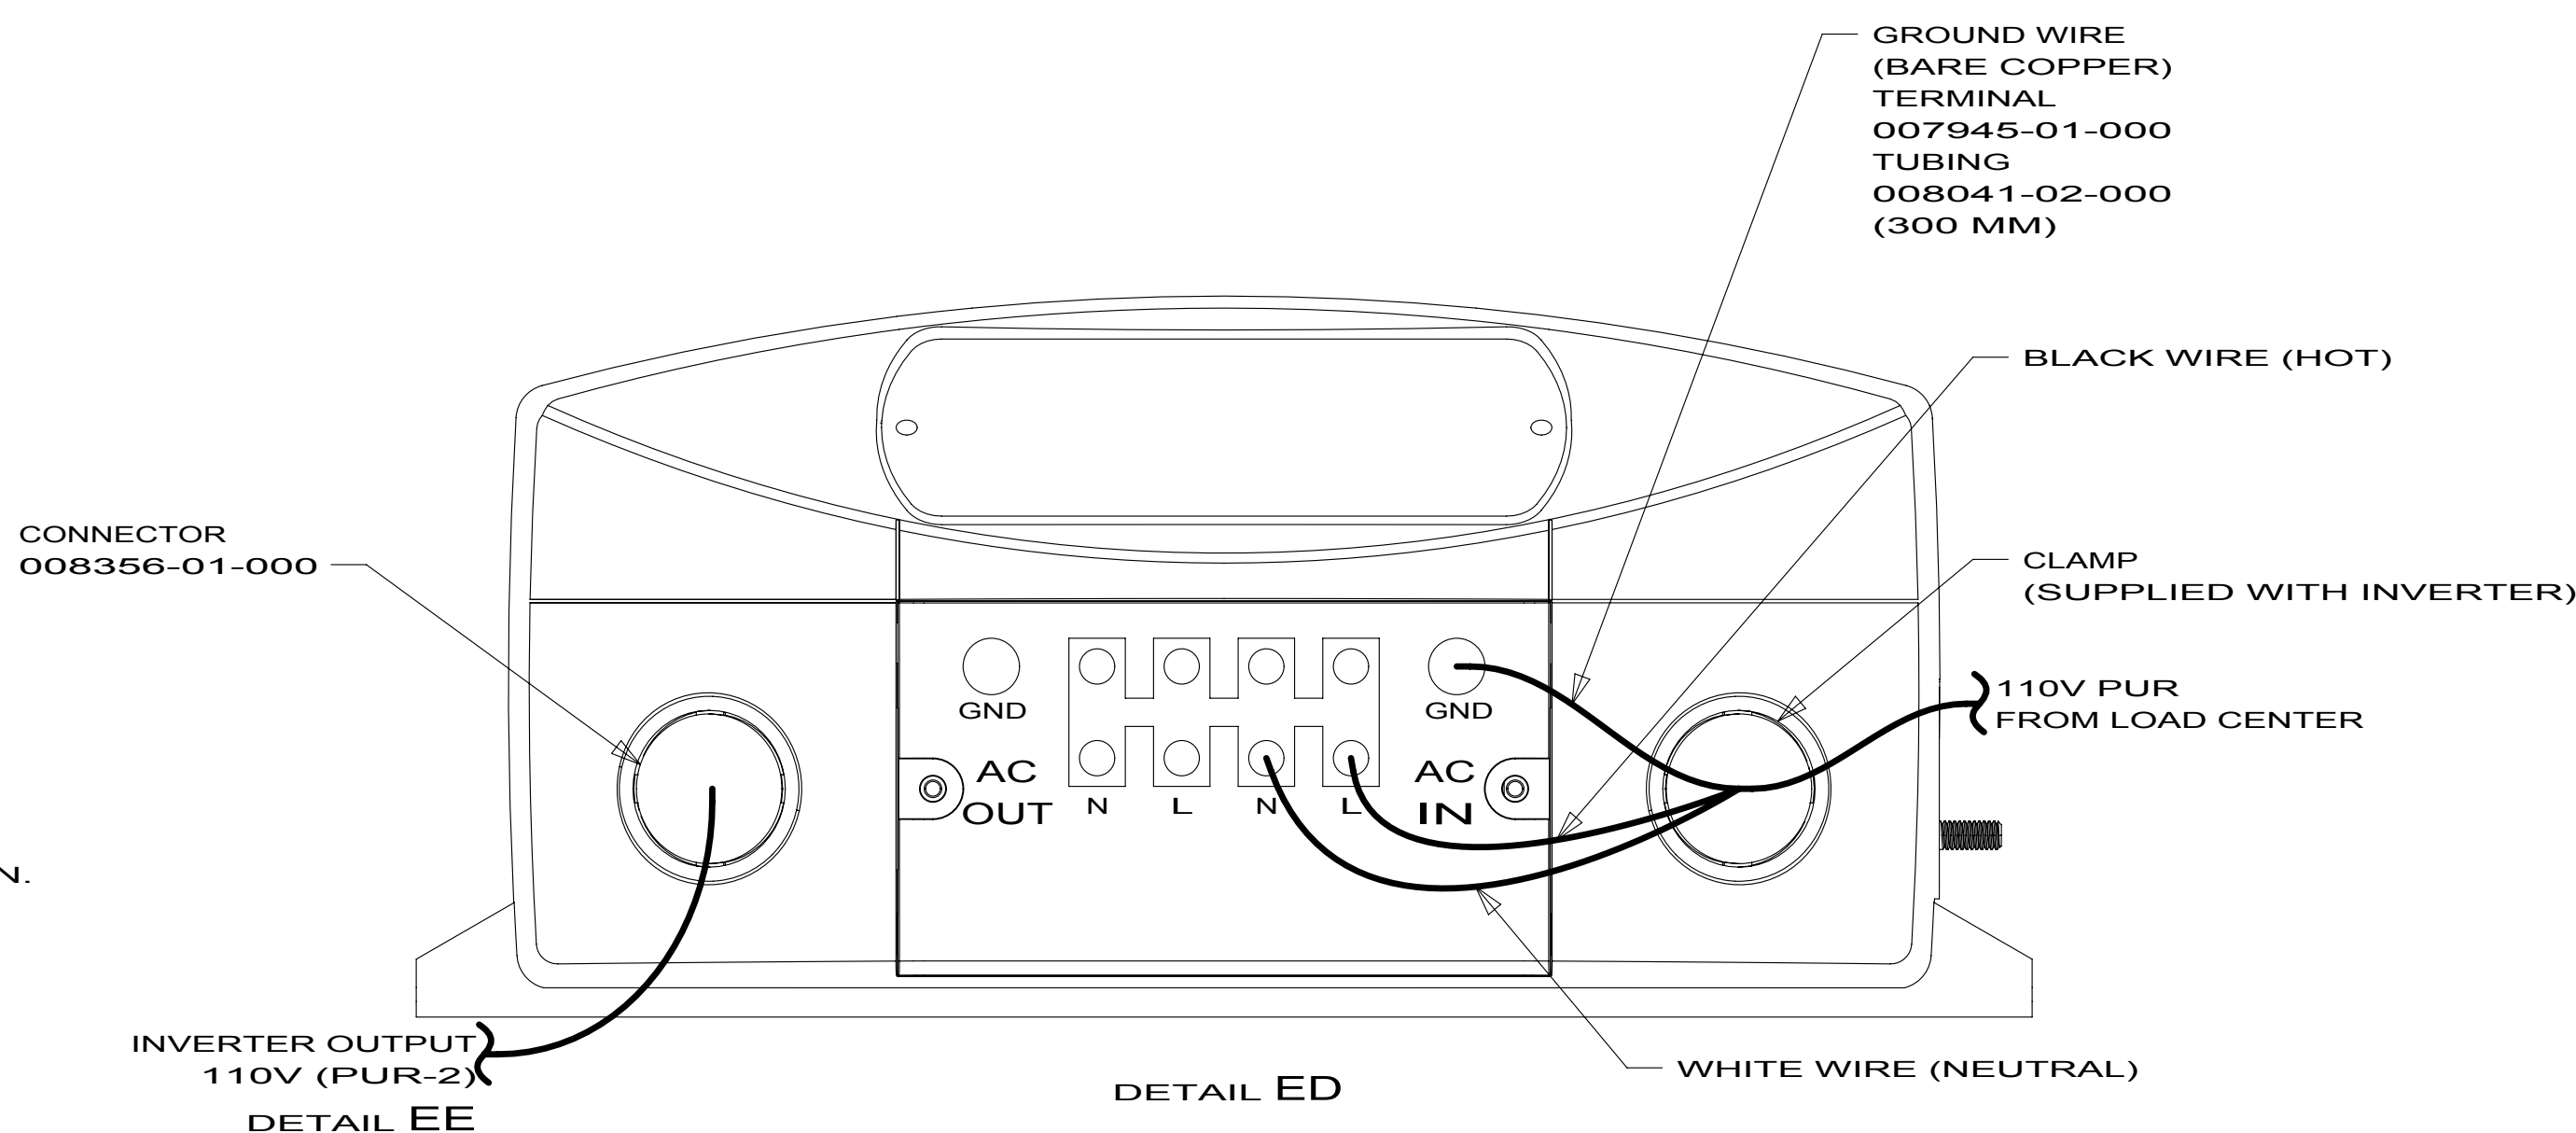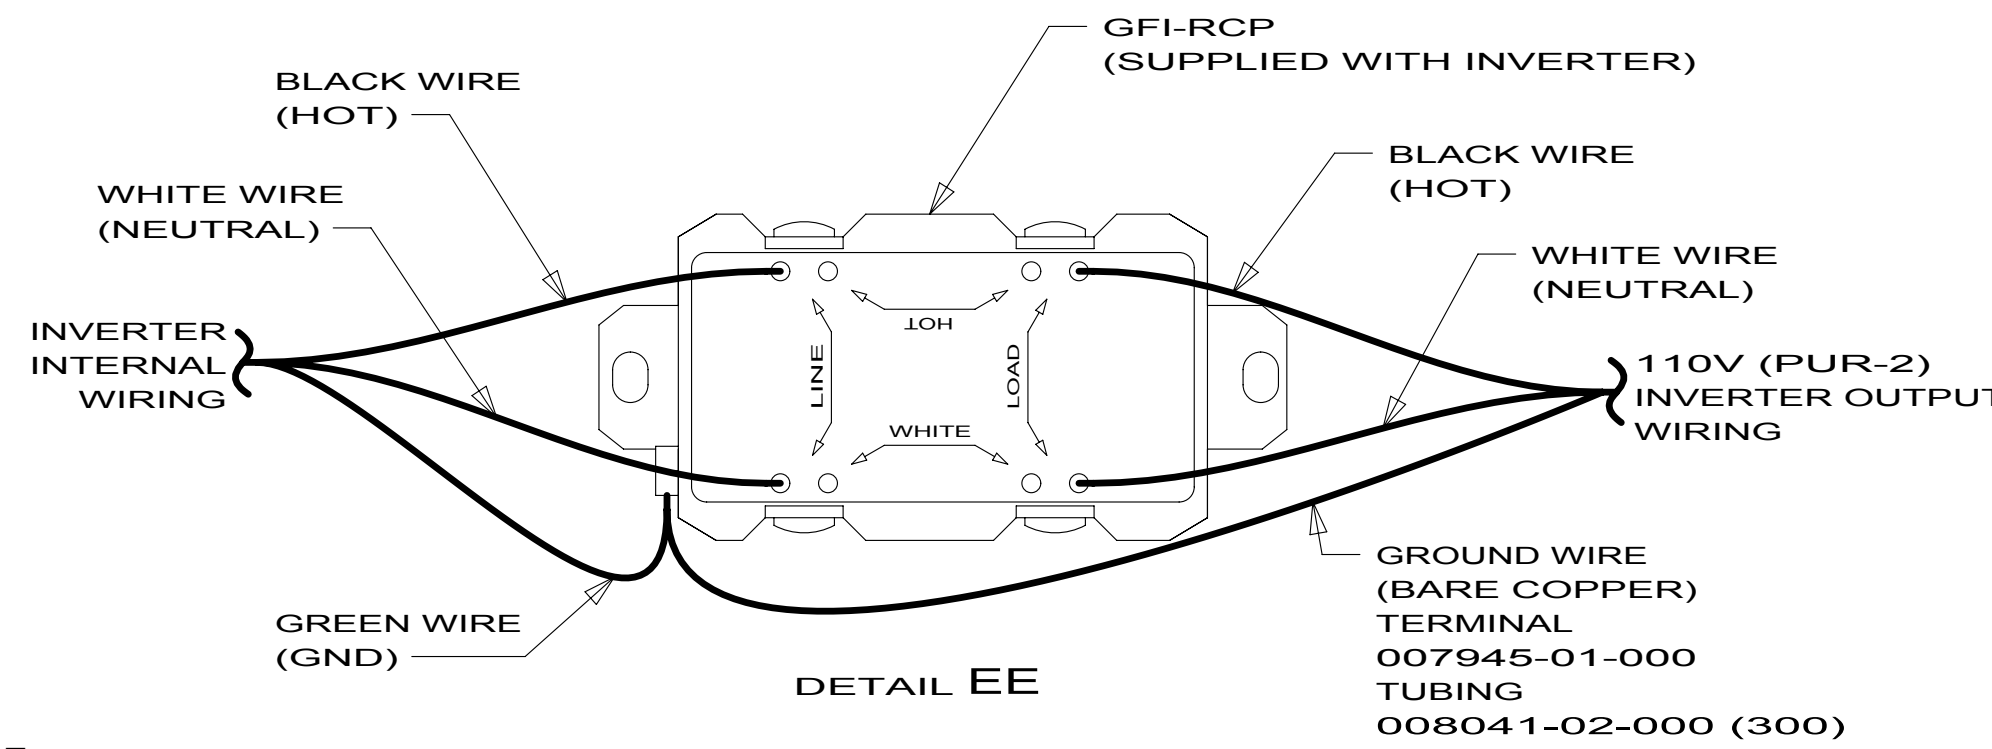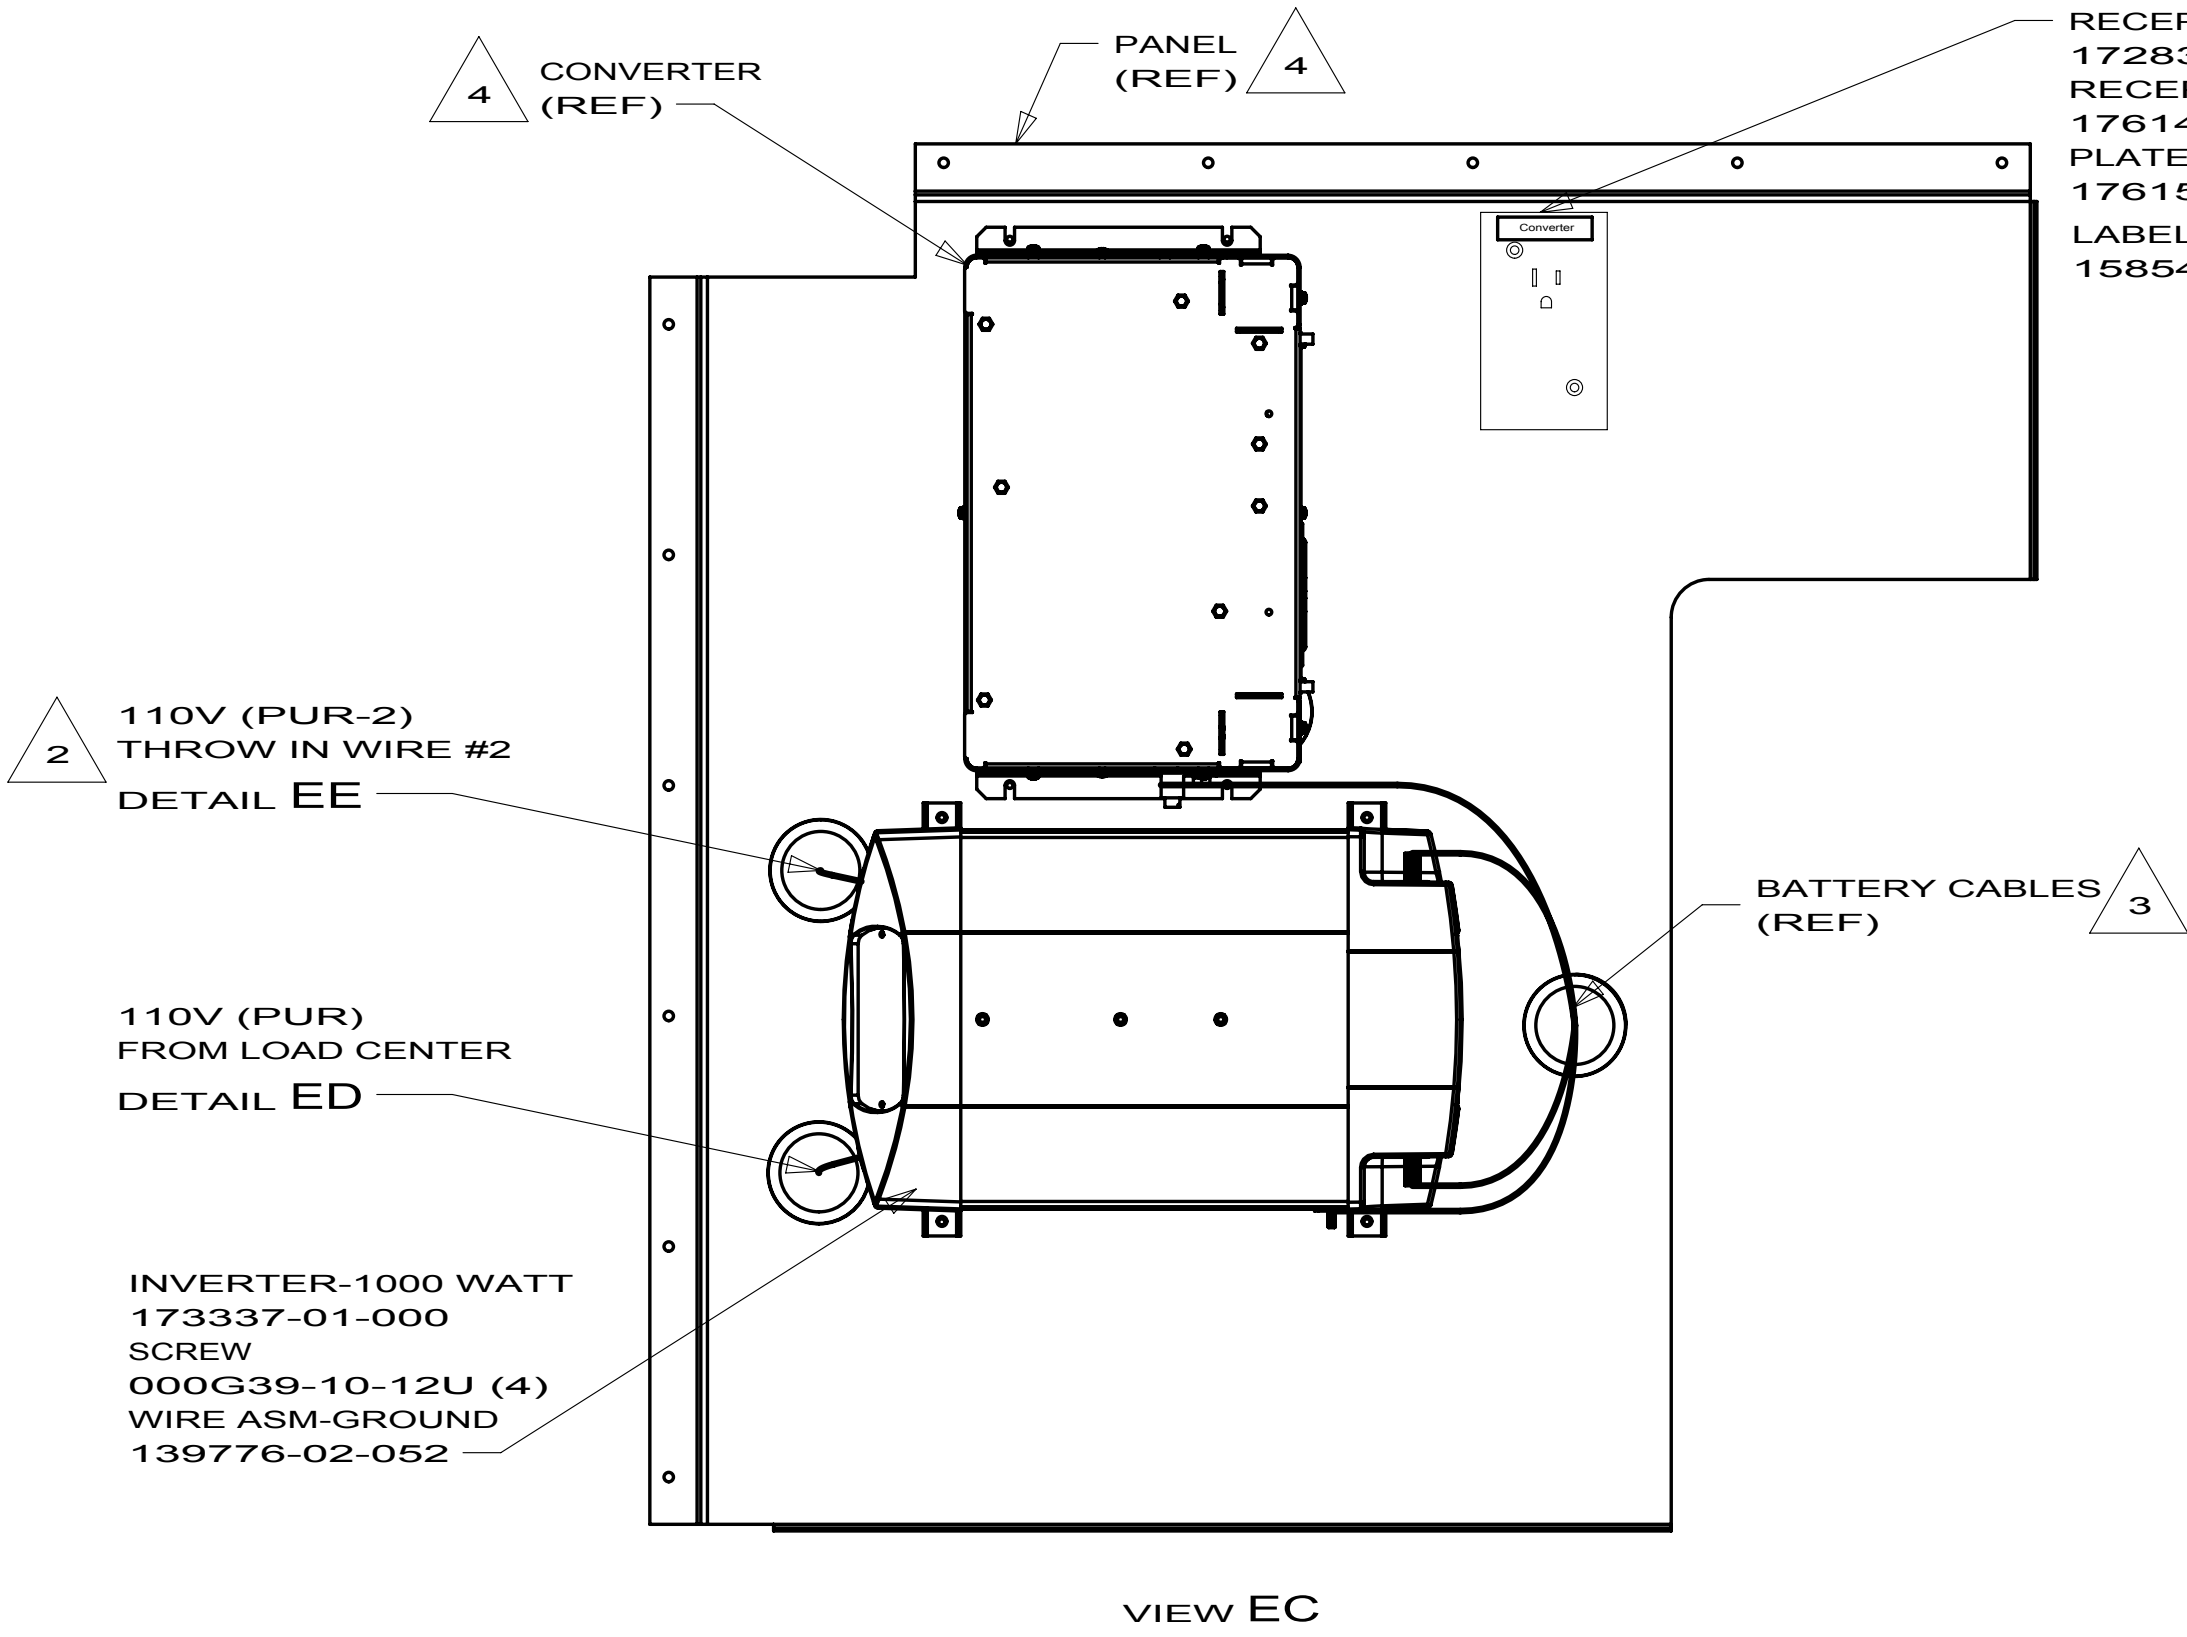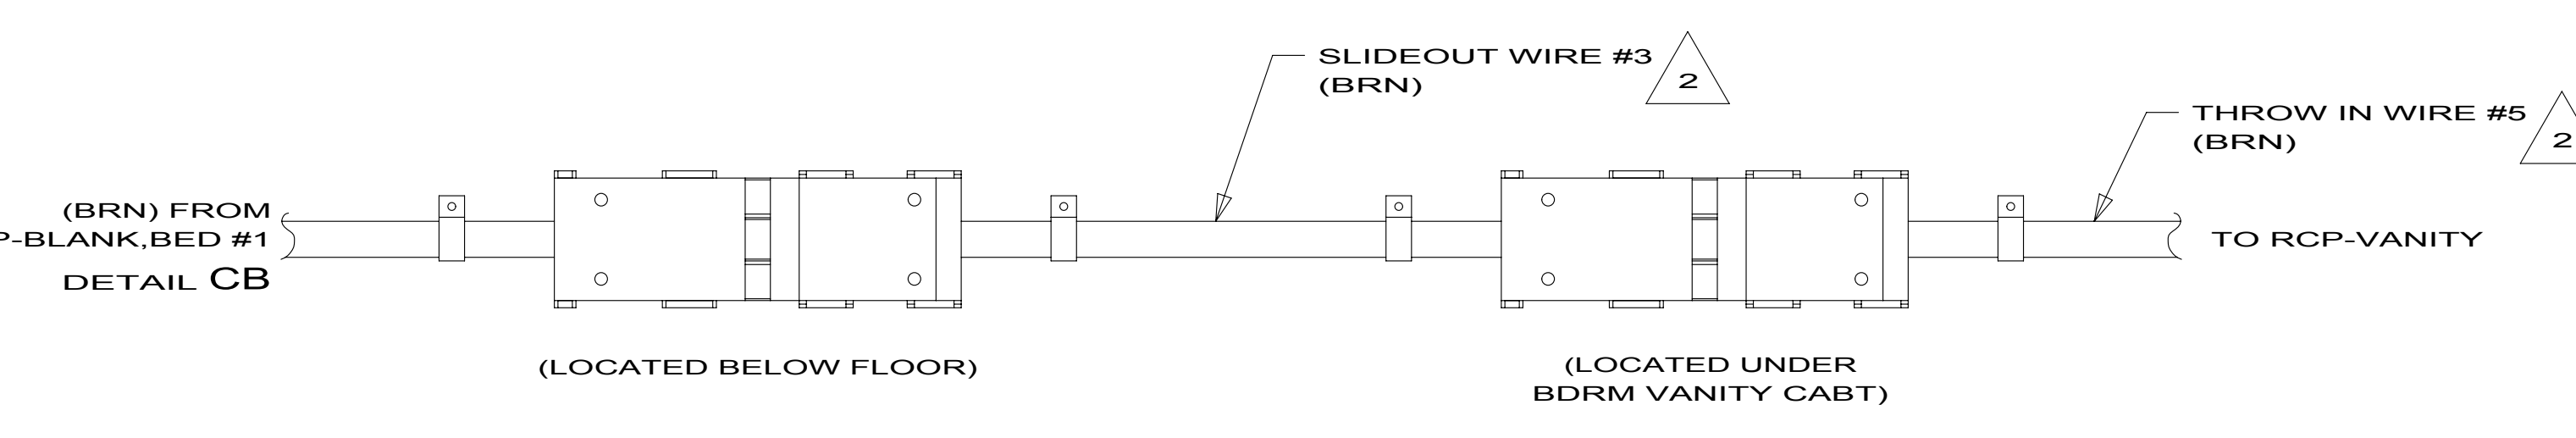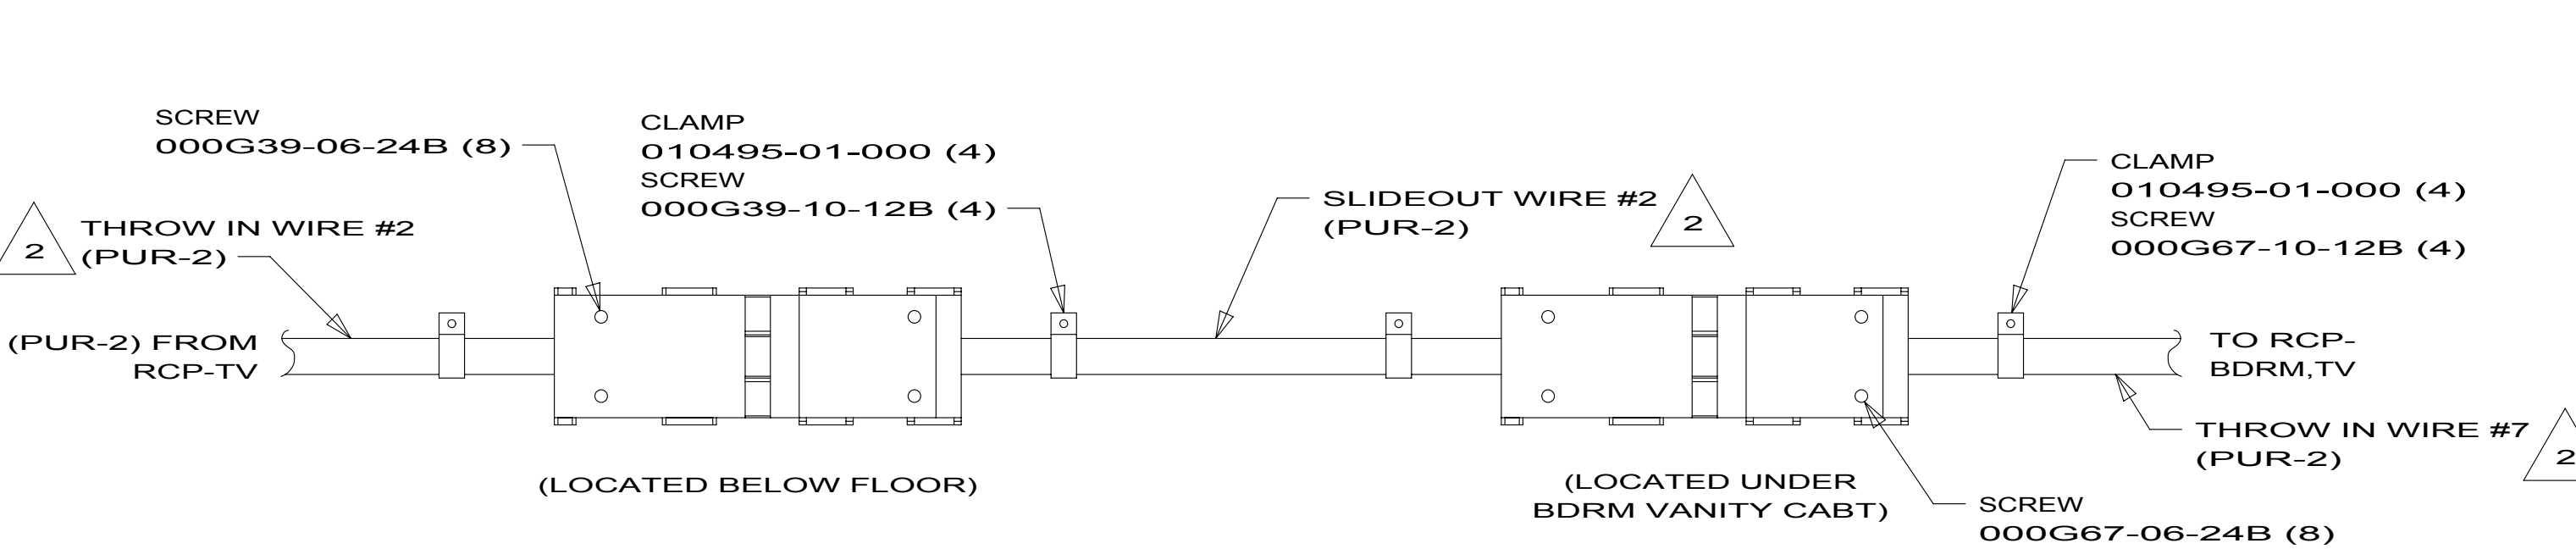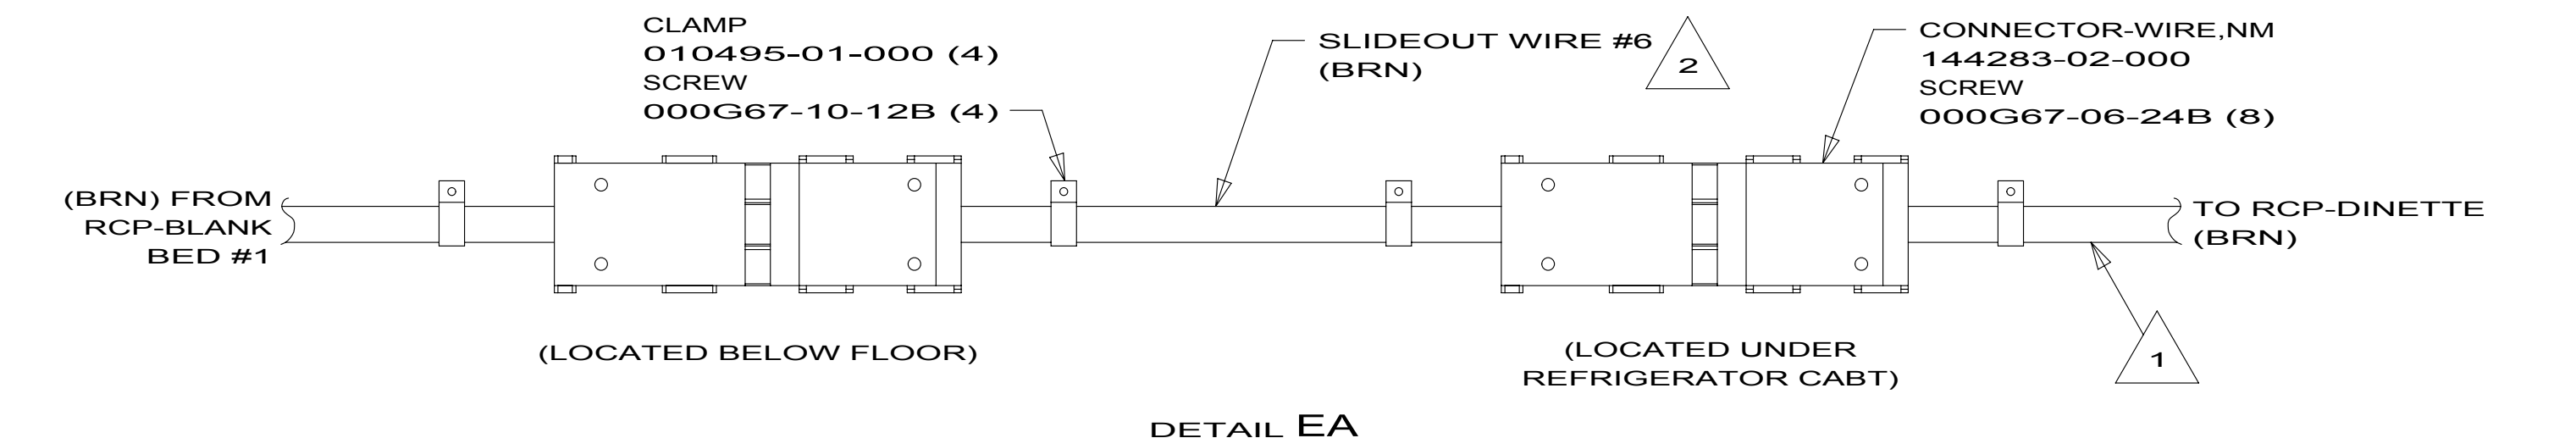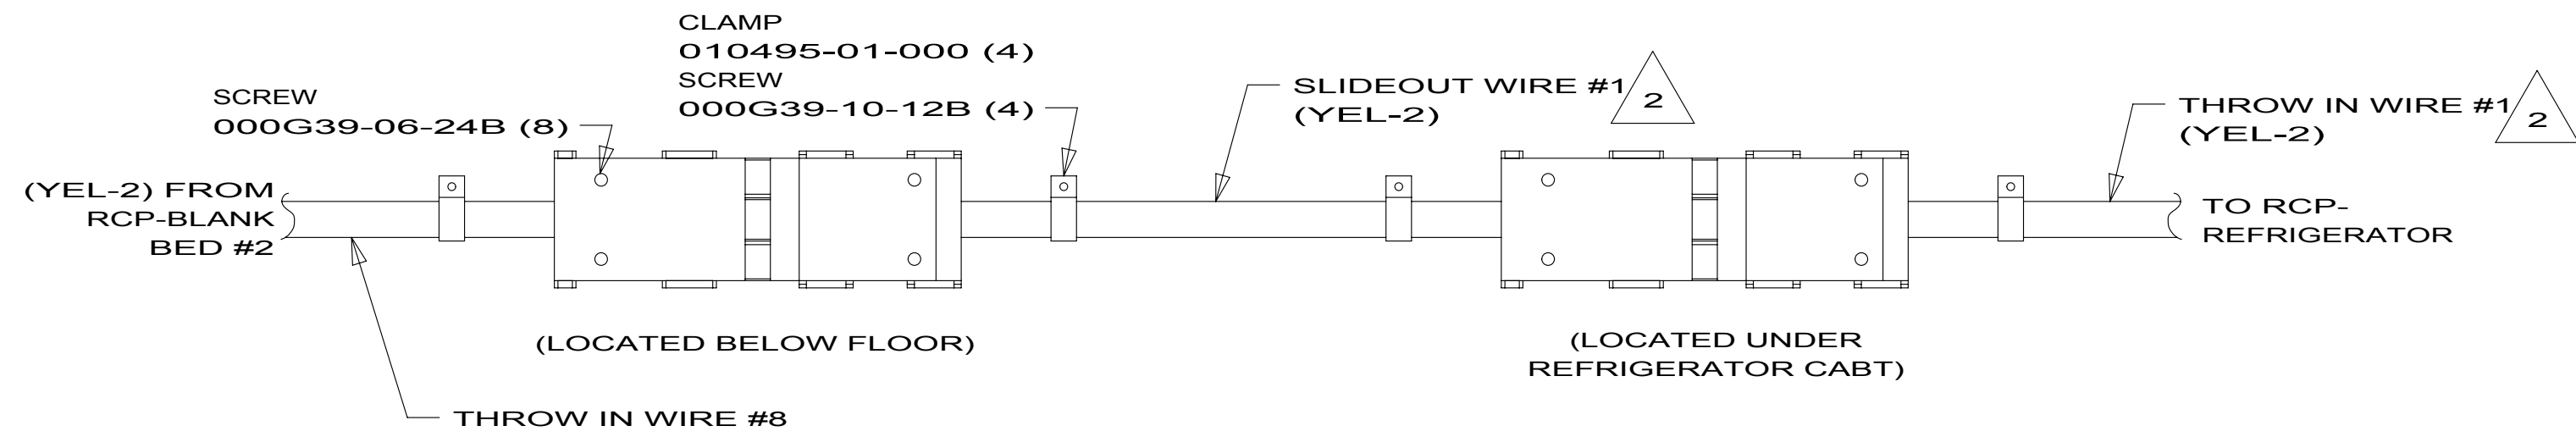

- NOTES:
- 4 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
 - 3 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
 - 2 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
 - 1 WIRE ROUTED IN SIDEWALL.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 1D3 ENTERTAIN CENTR/EXT TV-DVD
- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 5	PART NO 172895	REV

D

C

B

A

D

C

B

A

		P34Y	P39N	P40L	P40T
RED	12-UL	136135-07-050	136135-07-058	136135-07-050	136135-07-085
	12-CA	136136-07-050	136136-07-058	136136-07-050	136136-07-085
MAIN	4-3 UL	136141-01-033	136141-01-033	136141-01-032	136141-01-060
	4-3 CA	136142-01-033	136142-01-033	136142-01-032	136142-01-060
GRN	12-UL	136135-08-050	136135-08-058	136135-08-050	136135-08-085
	12-CA	136136-08-050	136136-08-058	136136-08-050	136136-08-085
YEL	14-UL	136131-05-035	136131-05-065	136131-05-020	136131-05-020
	14-CA	136134-05-035	136134-05-065	136134-05-020	136134-05-020
YEL-2	14-UL	136131-13-126	136131-13-150	136131-13-045	136131-13-110
	14-CA	136134-13-126	136134-13-150	136134-13-045	136134-13-110
GLD	12-UL	136135-10-078	136135-10-078	136135-10-050	136135-10-075
	12-CA	136136-10-078	136136-10-078	136136-10-050	136136-10-075
WHT	12 UL	136135-09-063	136135-09-063	136135-09-080	136135-09-095
	12 CA	136136-09-063	136136-09-063	136136-09-080	136136-09-095
BLU	14-UL	136131-02-095	136131-02-215	136131-02-096	136131-02-200
	14-CA	136134-02-095	136134-02-215	136134-02-096	136134-02-200
BRN	14-UL	136131-03-068	136131-03-130	136131-03-080	136131-03-260
	14-CA	136134-03-068	136134-03-130	136134-03-080	136134-03-260
PUR	14-UL	136131-04-045	136131-04-075	136131-04-092	136131-04-135
	14-CA	136134-04-045	136134-04-075	136134-04-092	136134-04-135
BLK	14-UL	136131-06-068	136131-06-100	136131-06-040	136131-06-120
	14-CA	136134-06-068	136134-06-100	136134-06-040	136134-06-120
INVERTER CHARGER MAIN	10-UL	-----	-----	136137-01-040	136137-01-075
	10-CA	-----	-----	136138-01-040	136138-01-075
INVERTER CHARGER SUB MAIN	10-UL	-----	-----	136137-01-040	136137-01-075
	10-CA	-----	-----	136138-01-040	136138-01-075
ORG	14-UL	-----	-----	136131-16-165	136131-16-300
	14-CA	-----	-----	136134-16-165	136134-16-300
GRY	14-UL	-----	-----	136131-15-055	-----
	14-CA	-----	-----	136134-15-055	-----

14C

14C

1 SEE DETAIL BA FOR CONNECTOR INSTALLATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 14C FIREPLACE-ELECTRIC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

WINNEBAGO

INDUSTRIES

COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFT-ORIG

ORIG. DATE

CHGR

ALL DIMENSIONS ARE
IN MILLIMETERS

P.E.

M.E.

FIRST USED

DSNR

10 P-SERIES

UNSPECIFIED TOLERANCES ARE:

MATERIAL:

WHOLE DIM (X) : 3

ONE-PLACE (X.X) : 1.5

TWO-PLACE (X.XX) : 0.50

ANGLE : 1°

THIRD ANGLE
PROJECTION

DO NOT SCALE DRAWING

TITLE:
LOAD CENTER/ATS ASM

SHEET 1 OF 5

PART NO 171529

REV

REF:

1

2/26/2010

8

7

6

5

4

3

2

1

GROUND MAIN

ATS GROUND

GENERATOR CABLE ASM

CONDUIT ASM-CENTRAL A/C

THROW IN WIRE #1

THROW IN WIRE #2

THROW IN WIRE #3

THROW IN WIRE #4

THROW IN WIRE #5

THROW IN WIRE #6

THROW IN WIRE #7

THROW IN WIRE #8

THROW IN WIRE #9

THROW IN WIRE #10

GROUND SUB MAIN

SLIDEOUT WIRE #1

SLIDEOUT WIRE #2

SLIDEOUT WIRE #3

SLIDEOUT WIRE #4

SLIDEOUT WIRE #5

SLIDEOUT WIRE #6

P34Y

P39N

P40L

P40T

136145-01-025

136145-01-020

136145-01-026

136145-01-072

136145-01-030

136145-01-025

136145-01-010

136145-01-020

136148-02-108

136148-02-125

136148-02-112

136148-02-085

151704-01-030

151704-01-030

151704-01-026

151704-01-028

136131-13-020

136131-13-009

136131-13-045

136131-13-012

136134-13-020

136134-13-009

136134-13-045

136134-13-012

136131-12-120

136131-12-200

136131-06-040

136134-12-120

136134-12-200

136134-06-040

136131-12-035

136131-03-030

136131-04-120

136131-04-050

136134-12-035

136134-03-030

136134-04-120

136134-04-050

136131-12-060

136131-03-010

136131-03-060

136131-03-060

136134-12-060

136134-03-010

136134-03-060

136134-03-060

136131-12-030

136131-03-055

136131-02-075

136134-12-030

136134-03-055

136134-02-075

136131-12-030

136131-12-030

136131-02-090

136134-12-030

136134-12-030

136134-02-090

136131-03-110

136131-12-020

136131-03-005

136131-03-005

136134-03-110

136134-12-020

136134-03-005

136134-03-005

136131-13-065

136131-13-100

136131-04-032

136134-13-065

136134-13-100

136134-04-032

136131-02-006

136131-04-035

136134-02-006

136134-04-035

136131-02-055

136131-02-018

136134-02-055

136134-02-018

136145-01-026

136145-01-078

136151-13-038

136151-13-030

136151-05-023

136151-13-030

136151-12-038

136151-12-030

136151-06-023

136151-03-023

136151-03-038

136151-03-030

136151-02-023

136151-04-023

136151-06-038

136151-03-020

136151-03-030

136151-03-030

136151-02-020

136151-03-030

136151-03-020

136151-02-030

136151-04-023

171529

DETAIL BA

DETAIL BB

DETAIL BC

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

10 P-SERIES



DO NOT SCALE DRAWING

LOAD CENTER/ATS ASM

SHEET 2

171529


2/26/2010

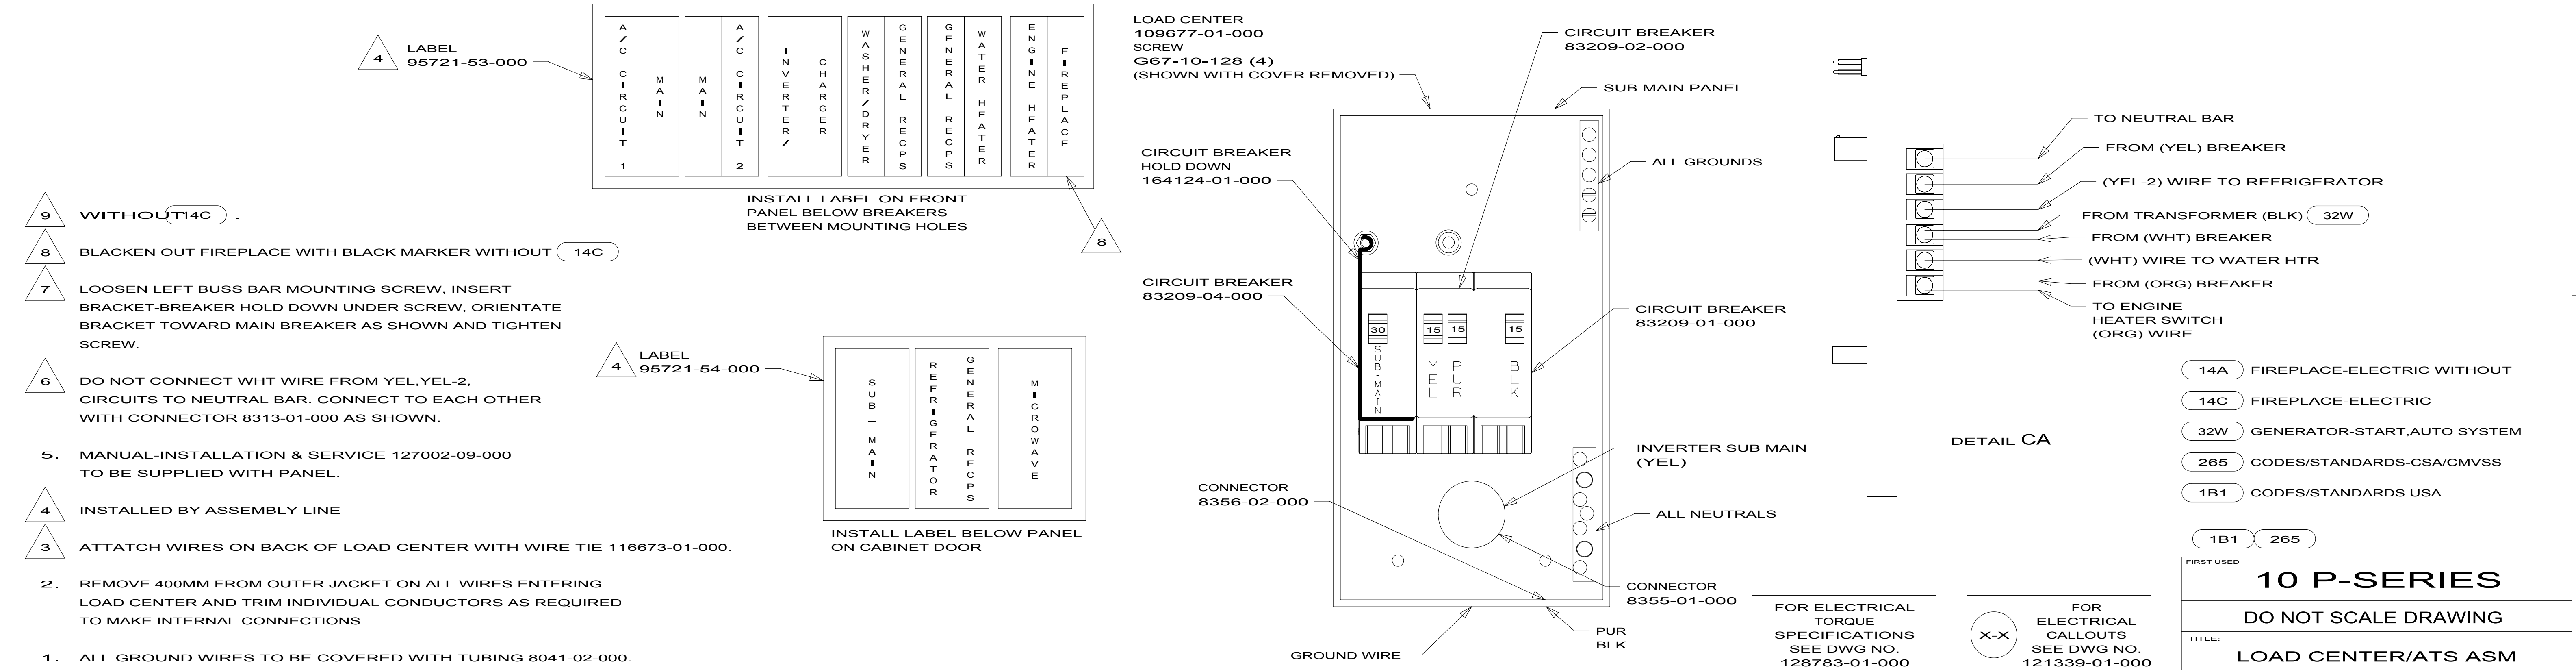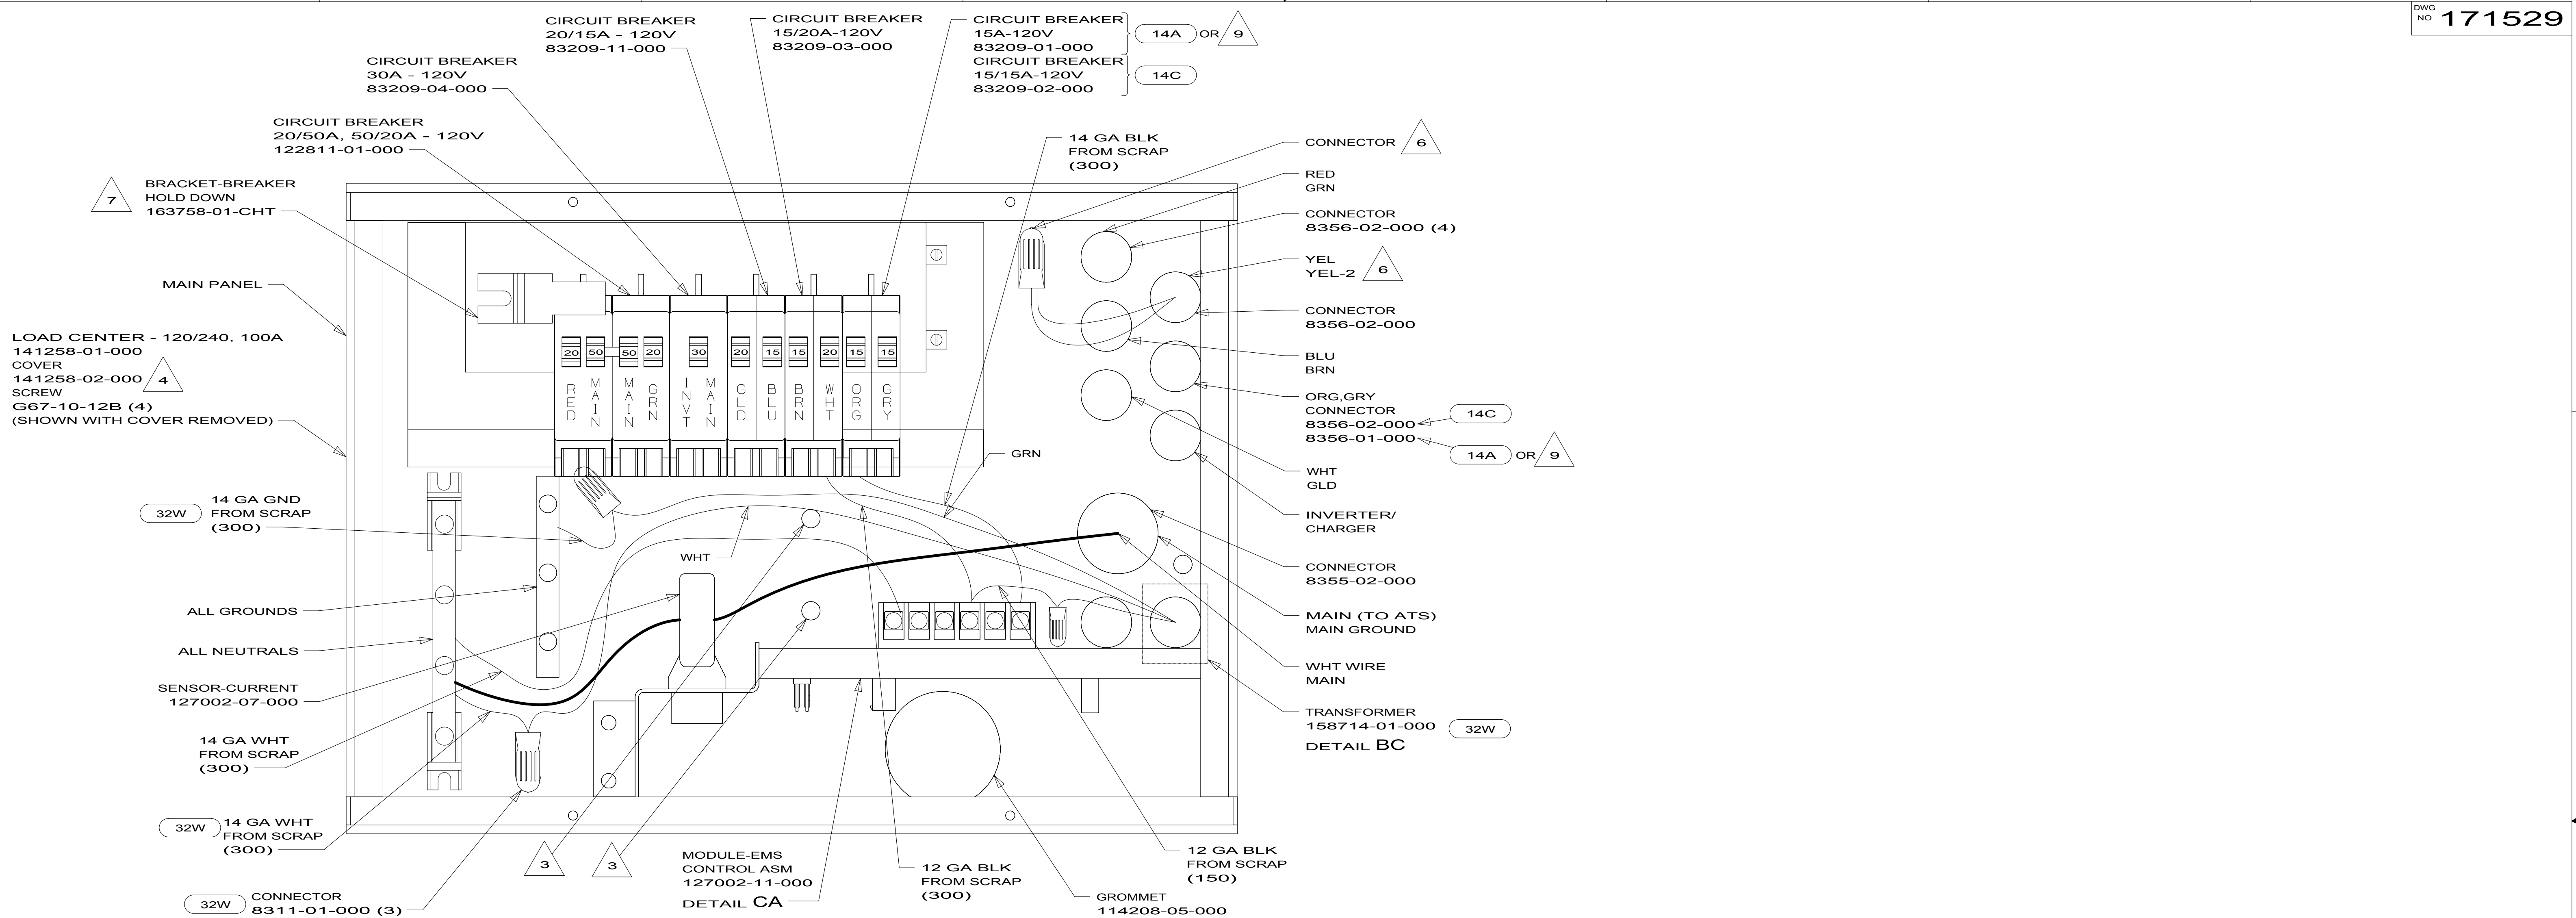

- NOTES:

8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---

SHEET 3
171529
2/26/2010

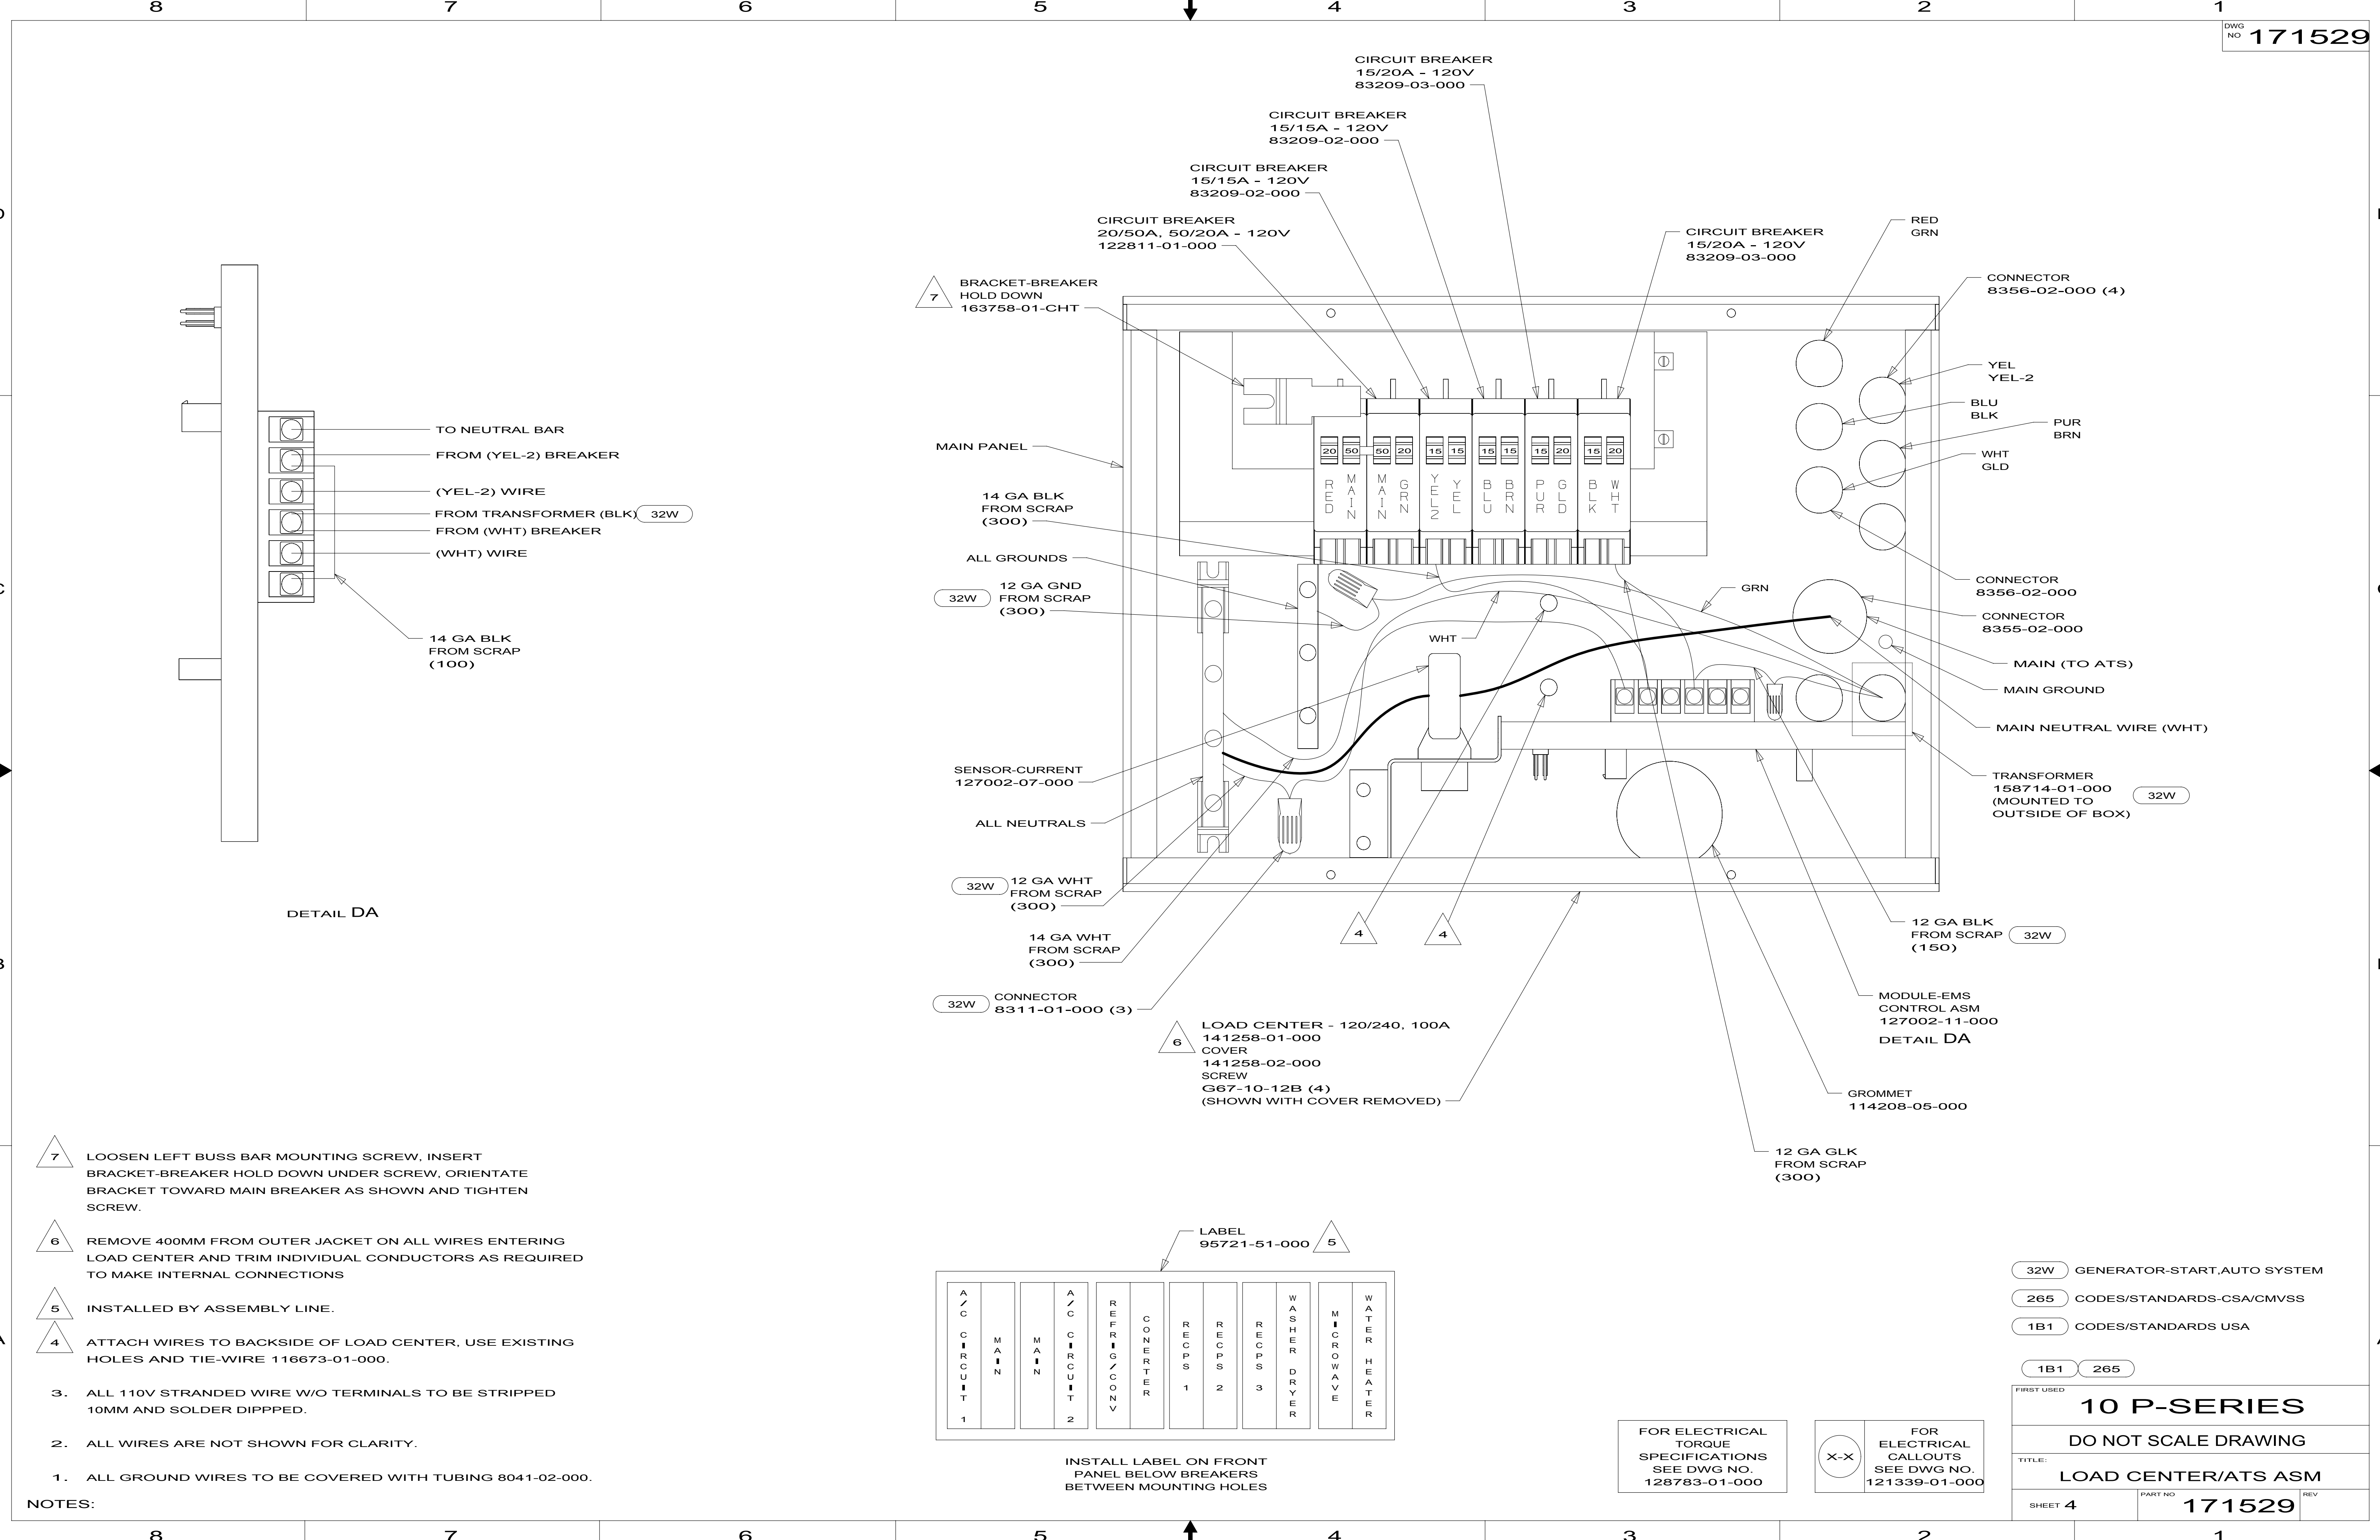

DETAIL DA

DETAIL DA

7. LOOSEN LEFT BUSS BAR MOUNTING SCREW, INSERT BRACKET-BREAKER HOLD DOWN UNDER SCREW, ORIENTATE BRACKET TOWARD MAIN BREAKER AS SHOWN AND TIGHTEN SCREW.
6. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS
5. INSTALLED BY ASSEMBLY LINE.
4. ATTACH WIRES TO BACKSIDE OF LOAD CENTER, USE EXISTING HOLES AND TIE-WIRE 116673-01-000.
3. ALL 110V STRANDED WIRE W/O TERMINALS TO BE STRIPPED 10MM AND SOLDER DIPPED.
2. ALL WIRES ARE NOT SHOWN FOR CLARITY.
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

NOTES:

A / C	M A I N	A / C	R E F R I G / C O N V	R E C P S 1	R E C P S 2	R E C P S 3	W A S H E R D R Y E R	M I C R O W A V E	W A T E R H E A T E R
1		2							

INSTALL LABEL ON FRONT PANEL BELOW BREAKERS BETWEEN MOUNTING HOLES


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 32W GENERATOR-START,AUTO SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: LOAD CENTER/ATS ASM		
SHEET 4	PART NO 171529	REV

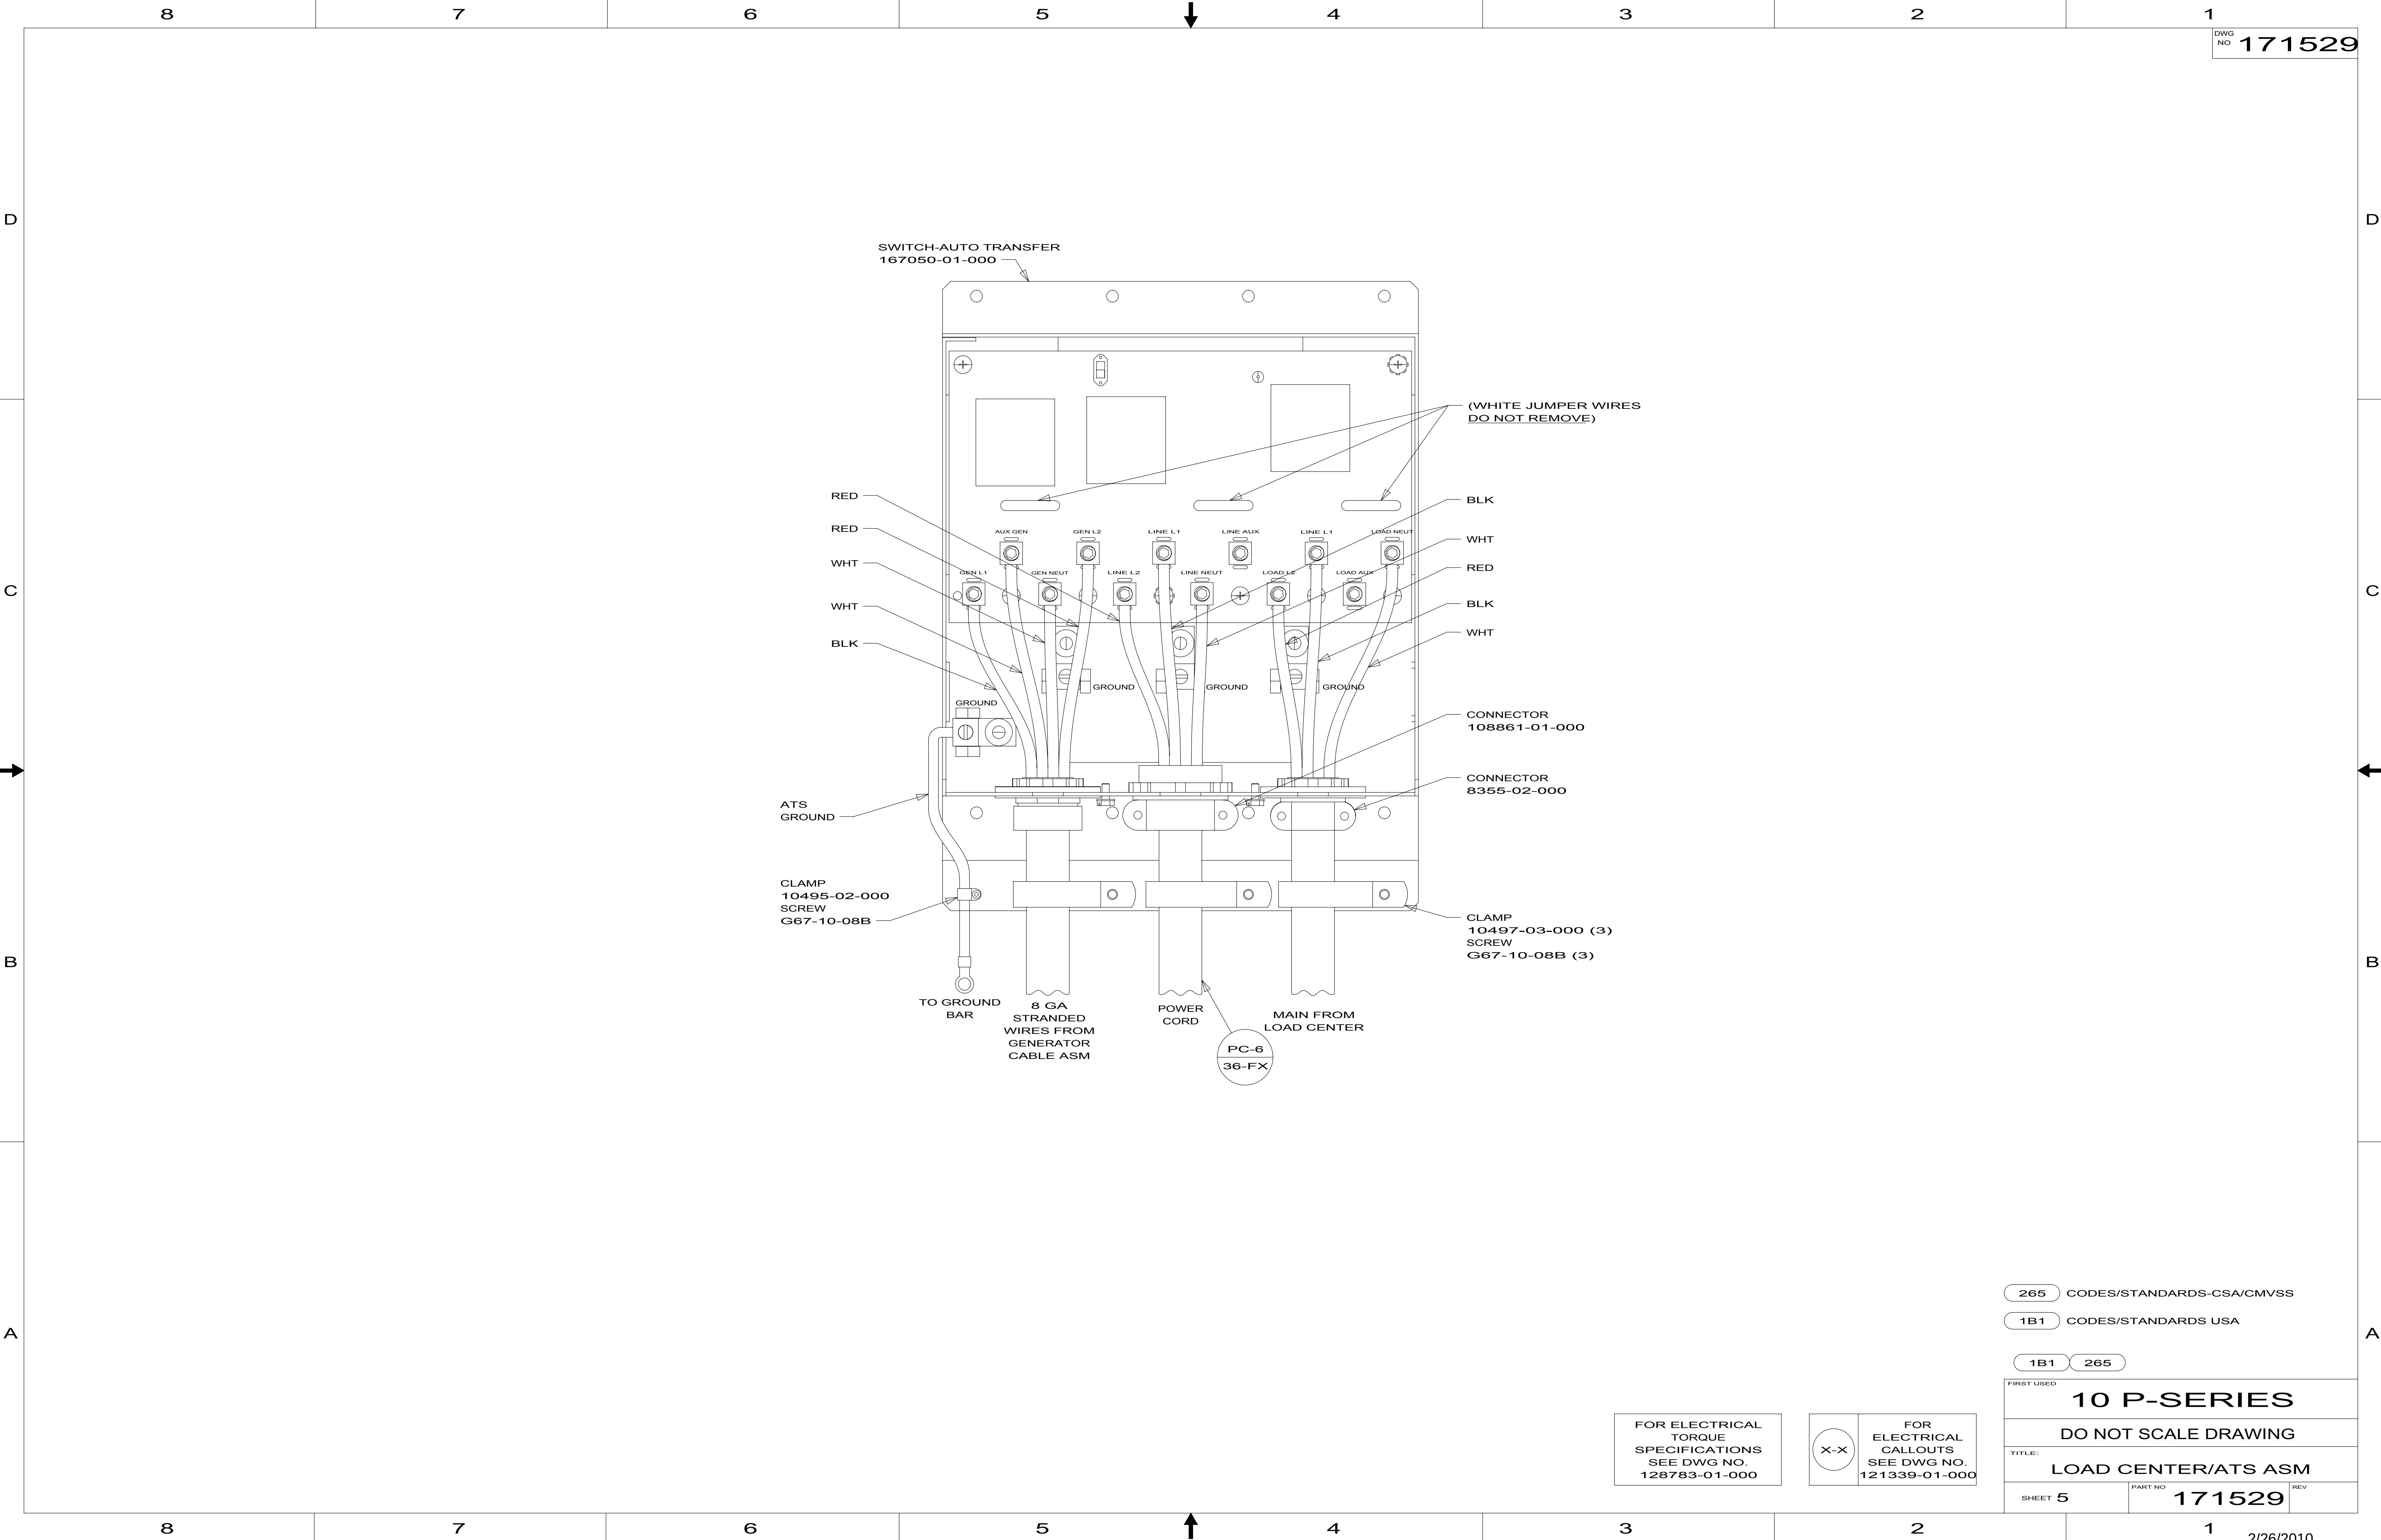

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
LOAD CENTER/ATS ASM		
SHEET 5	PART NO 171529	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

SWITCH-SERVICE LAMP
108357-05-000
ACTUATOR-SWITCH
108356-01-01A
(8 PIN HSG WITH
CIRCUITS KKH,WC,KKJ)

SWITCH-AUTO LEVEL
108357-18-000
ACTUATOR
108356-03-01A
(8 PIN HSG WITH
CIRCUITS SSD,SSE,
SSC,SSF,SSE)

SWITCH-PUMP
108357-15-000
ACTUATOR
108356-03-01A
(8 PIN HSG WITH
CIRCUITS AG,AF,
JS,HHB)

SWITCH-SERVICE LAMP
108357-05-000
ACTUATOR
108356-01-01A
(8 PIN HSG WITH
CIRCUITS KKH,BBZ,KKJ)

PLATE-WALL
149557-03-01A
SCREW
000G39-08-08B (2)

PANEL
167669-02-02B
SCREW
000G39-10-10T (4)

LABEL
117628-05-000

PANEL-RECEPTACLE
151376-02-02B
ADAPTOR
082134-01-000
NUT
082136-01-000
LABEL
157486-01-02A
SCREW
000G67-10-12B (4)

WIRE ASM-AUX
HOLDING TANK #1
151316-05-000

INVERTER CONTROL
CABLE TO REMOTE PANEL

2 PIN HSG
TO WATER PUMP

WIRE ASM-MAIN
HOLDING TANK
151317-02-000

GROMMET
023942-01-000

WIRE ASM-COACH
TO SLIDEOUT ROOM

WIRE ASM-AUX
HOLDING TANK #2
151316-02-000

4 PIN HSG
TO FURNACE

GROMMET
023942-01-000

COAX (YEL-2)
TO EXTERIOR OUTPUT

INVERTER CONTROL
CABLE TO INVERTER

WIRE ASM-
WATER TANK
151317-05-000

WIRE ASM-COACH
173434-01-000

WIRE ASM-THERMOSTAT
135131-02-000

TO CENTRAL A/C

- 6 PLACE CROSS LOCATOR ON SENSORS OVER DIMPLES ON TANK.
- 5 FOR MORE INFORMATION SEE A/C INSTL.
- 4 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION.
- 3 WIRE PASSES UP THRU FLOOR IN THIS AREA.

2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASS OVER SENSORS.
USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000
AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL
ALCOHOL AND PRIMED WITH PRIMER 94.

1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR
WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX
OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

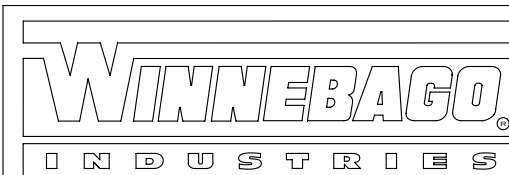


COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHK-OR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	10 P39N
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	

DO NOT SCALE DRAWING

TITLE:		WIRING INSTL-BODY,12V	
SHEET 1 OF 10	PART NO	172894	REV

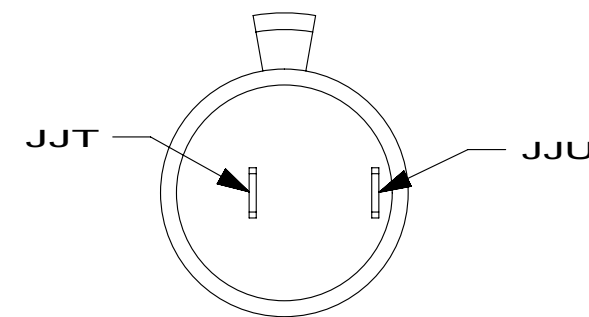

DETAIL BA

LIGHT-READING,SWIVEL
132427-01-02A(2)

WIRE ASM-OVHD
172140-01-000

SPEAKER
094097-01-000
GRILLE
159430-01-02A
SCREW
000G11-08-08B (4)

TRAVEL LATCH
DETAIL JD

DVD-FLIPDOWN
164136-01-000 (2)
SCREW
000G11-08-16T (4)
000G39-08-32T (4)

SWITCH
DETAIL EB

BRACKET-WIRE COVER
168824-02-02B
SCREW
000G11-08-12B (2)

TRAVEL LATCH
DETAIL JE

PLATE-WALL,COAX
149557-08-02A
SCREW
000G67-10-08B (2)
(COAX ORG-2 TO
WALLPLATE)

LIGHT-HALOGEN,ROUND
165170-01-01A(2)

PLATE-RCA, 6-WAY
169065-02-01A (UP TO 05-03-10)
SCREW
000G13-05-10B (4)

SWITCH
DETAIL EA

2 PIN HSG TO
WIRE ASM-SIDEWALL

LIGHT-OVAL,SGL,W/SW,FROSTED
170693-01-01A (UP TO 9-27-09)
170693-01-02A (AFTER 9-28-09)

MM,MS
TO SIDEMARKER LAMP

WIRE ASM-SLIDEOUT
169889-01-000

WALLPLATE-TV
076319-09-000 (2)
SCREW
000G12-06-08B (4)

RADIO-WALLMOUNT
169536-01-01A
SCREW
076790-03-000 (4)
FILTER-VIDEO NOISE
165161-01-000

TO WIRE ASM-COACH
DETAIL BB

ET,EU
TO REFRIGERATOR

TO WIRE ASM-SIDEWALL

DETECTOR-LP GAS
150138-01-02A

LAMP
093575-46-01A
SCREW
147584-01-01A (2)
CONNECTOR
058028-01-000 (2)

RECEPTACLE-12V
132958-01-000
DETAIL BA

SPLITTER
086756-02-000
SCREW
000G11-08-12B (2)

COAX (GRN)
WIRE ASM-COACH

COAX (GRN)
WIRE ASM-SLIDEOUT
COAX (GRN/GRN)
WIRE ASM-SLIDEOUT
COAX (GRN/GRN/GRN)
WIRE ASM-SLIDEOUT

COAX (ORG/ORG)
WIRE ASM-COACH

COAX (ORG/ORG)
WIRE ASM-SLIDEOUT

ADAPTER
082134-01-000

DETAIL BB

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



- ITA ITASCA ONLY
- WIN WINNEBAGO ONLY
- 25D STEREO SYSTEM/W/CD/DVD REAR
- 10C DVD PLAYERS(2)W/LCD MONITORS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 2	PART NO 172894	REV

- ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

- 4 TO BE USED FOR TOP BUNK DVD.
- 3 TO BE USED FOR BOTTOM BUNK DVD.
- 2 CONNECT INLINE OF THE YELLOW VIDEO CABLE. WRAP BOTH ENDS OF FILTER CONNECTIONS WITH TAPE 8363-01-000 TO SECURE FILTER.

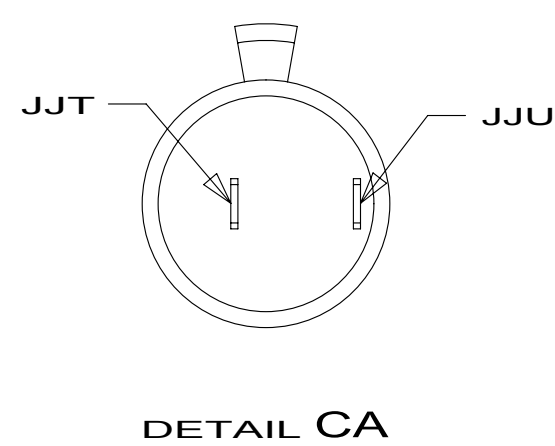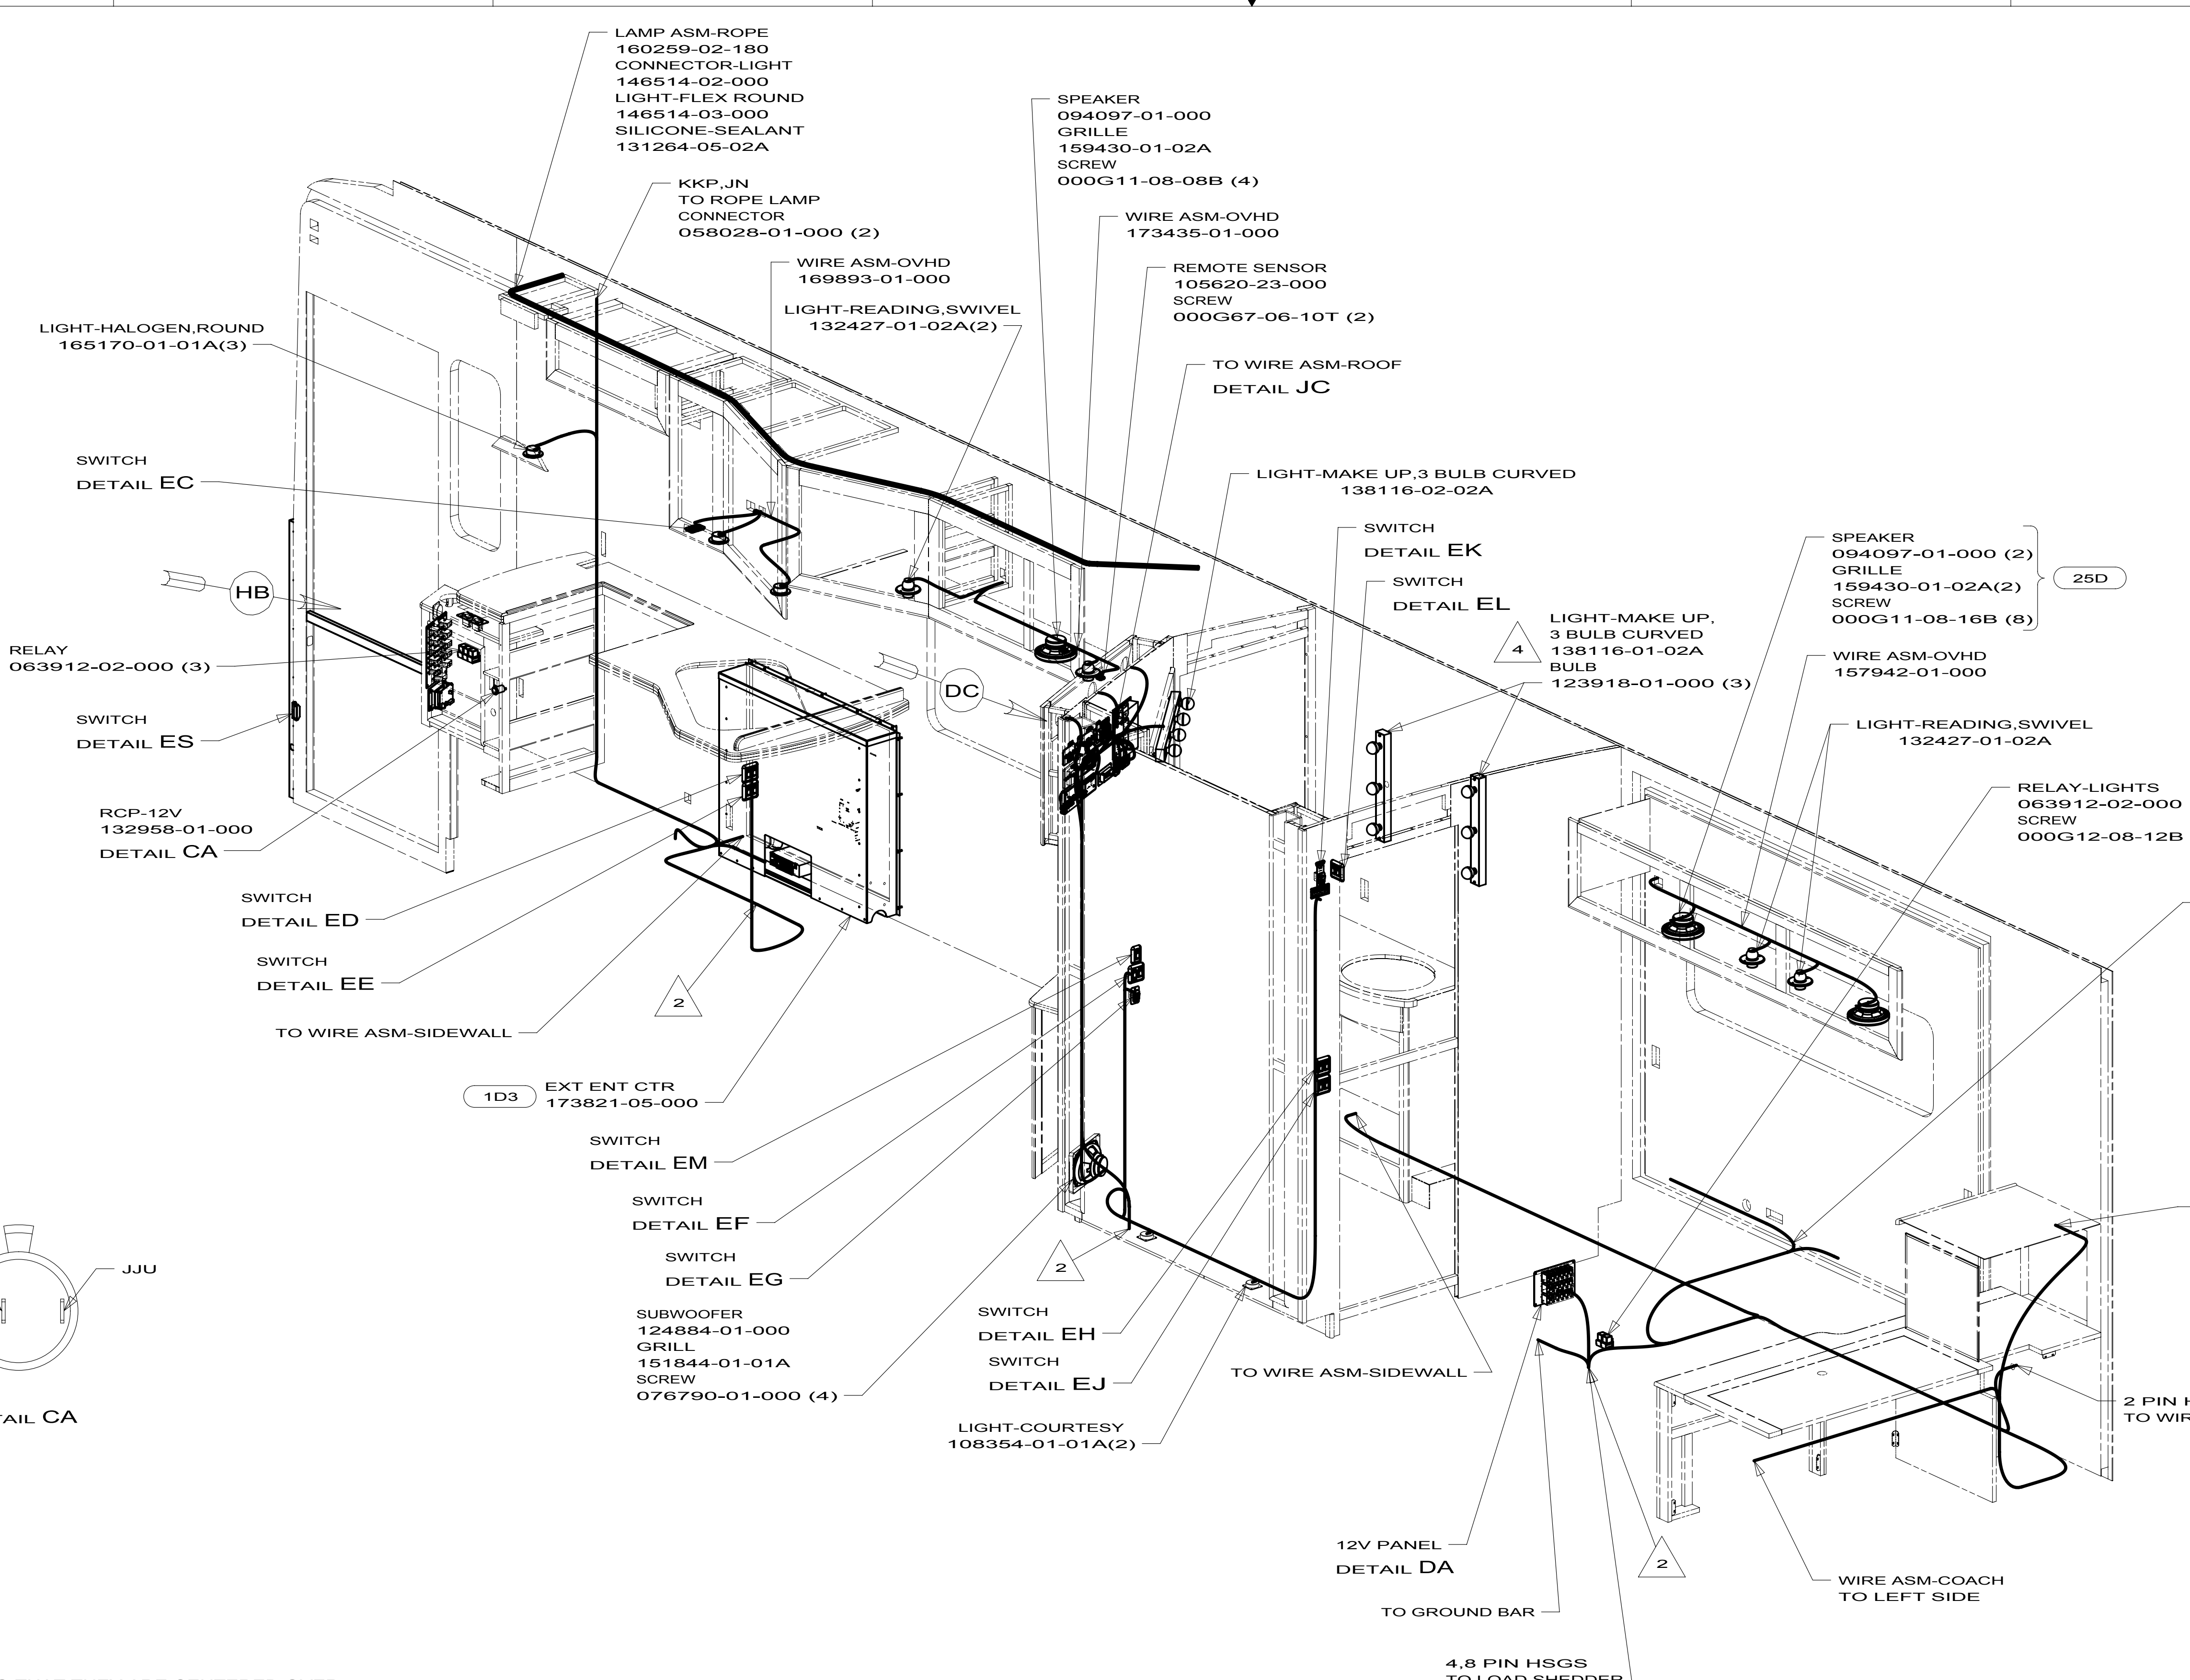

- 4 MOUNT LIGHTS SO THAT THEY ARE CENTERED OVER HOLES IN SIDEWALL.
- 3 WITHOUT 23B PLUG TWO 3-PIN HSGS TOGETHER.
- 2 WIRE PASSES THRU FLOOR IN THIS AREA.

1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


- 1D3 ENTERTAIN CENTR/EXT TV-DVD
- 25D STEREO SYSTEM/W/CD/DVD REAR
- 23B BED-KING SIDEWALL (POWERED)
- 1D3 ENTERTAIN CENTR/EXT TV-DVD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 3	PART NO 172894	REV


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

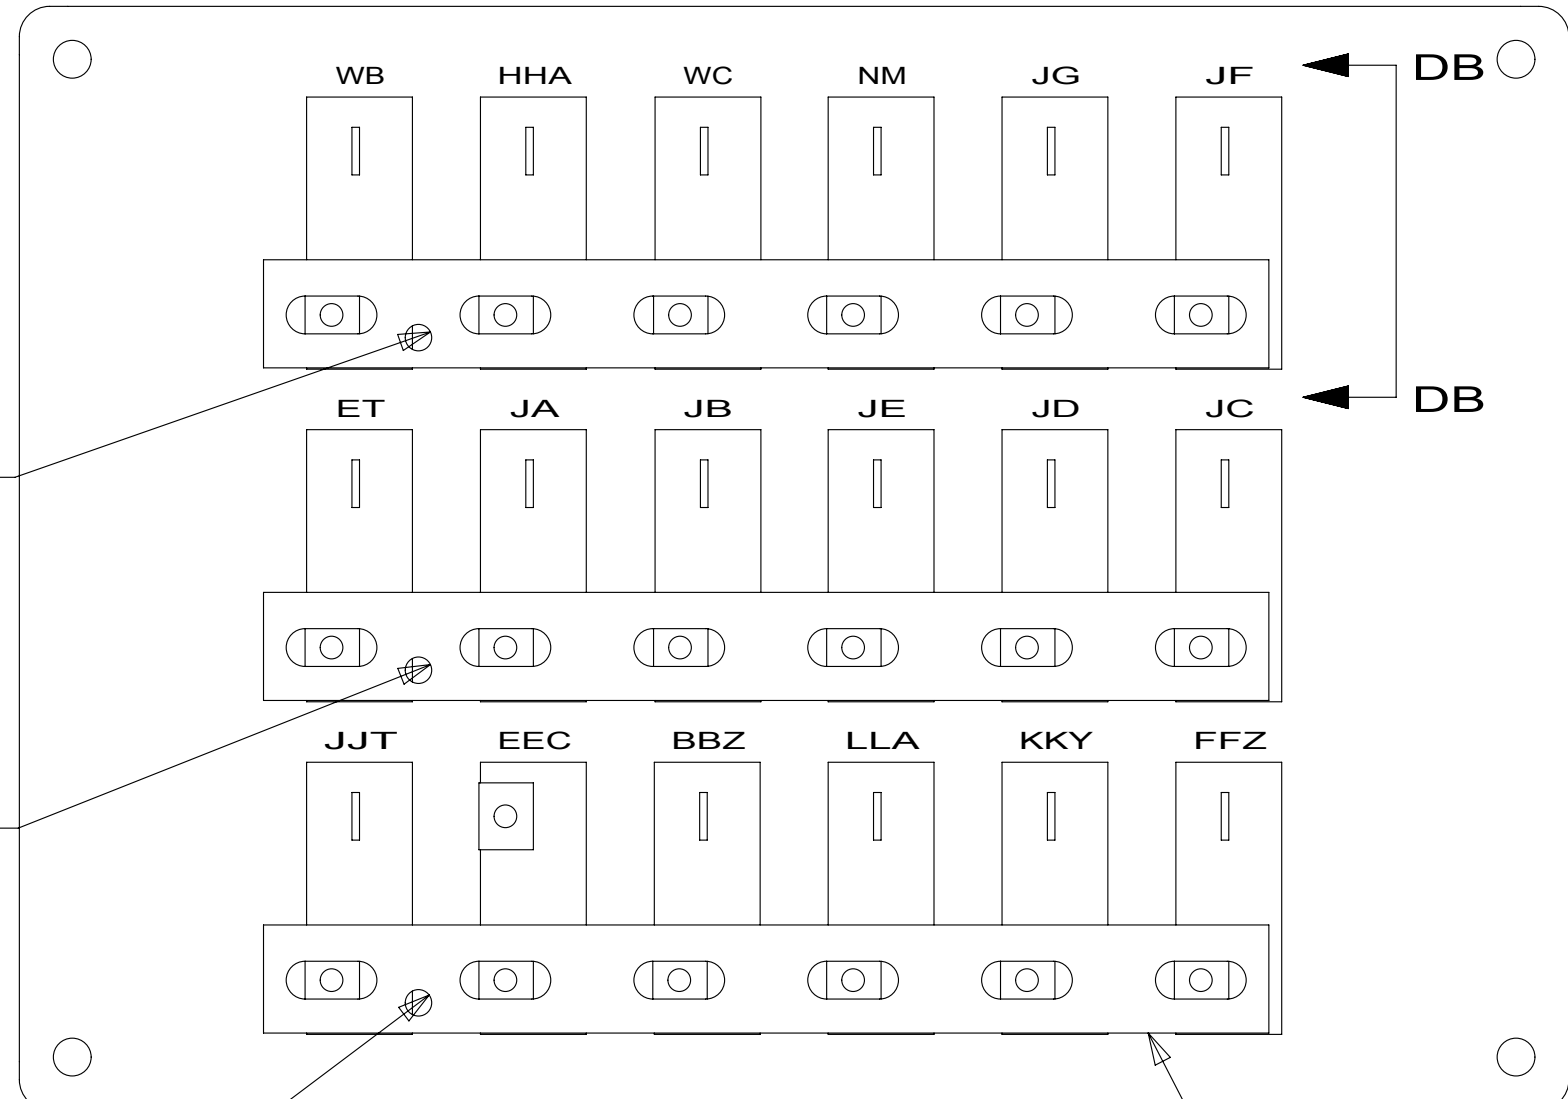

DETAIL DA
(BACK VIEW)

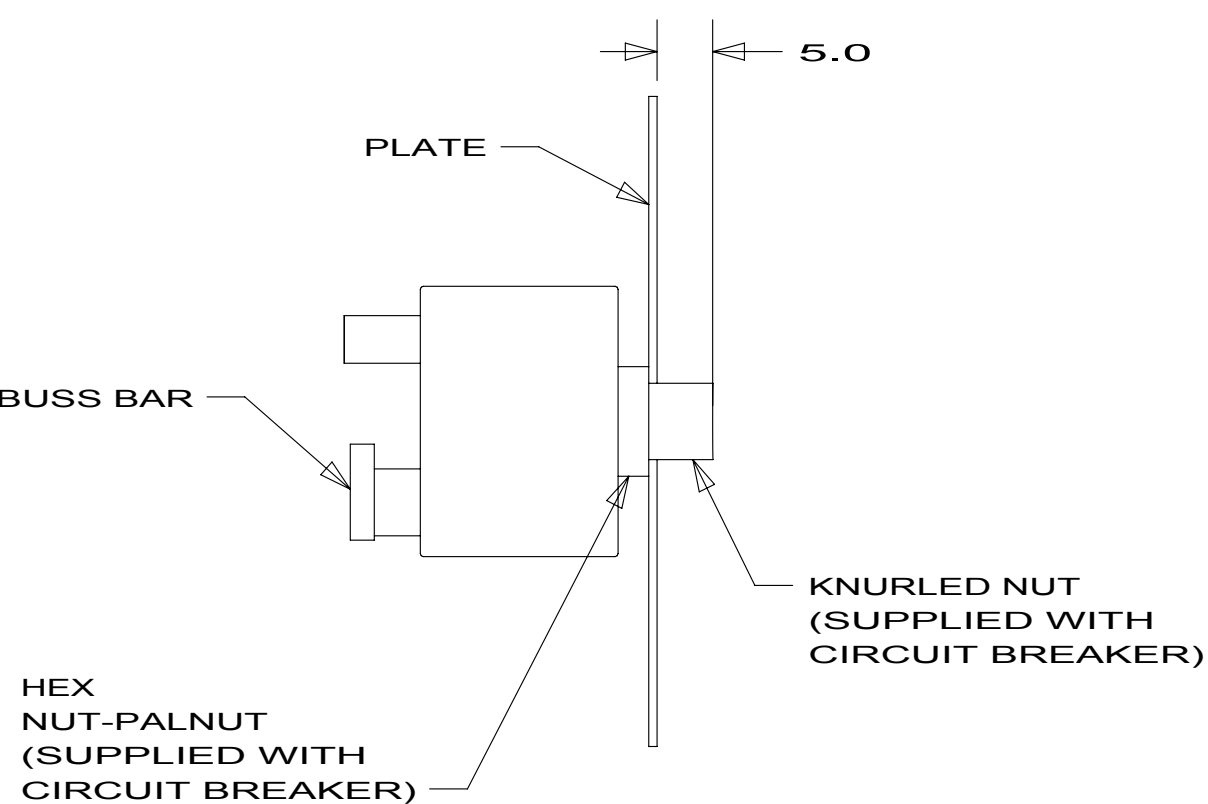


DETAIL DB-DB

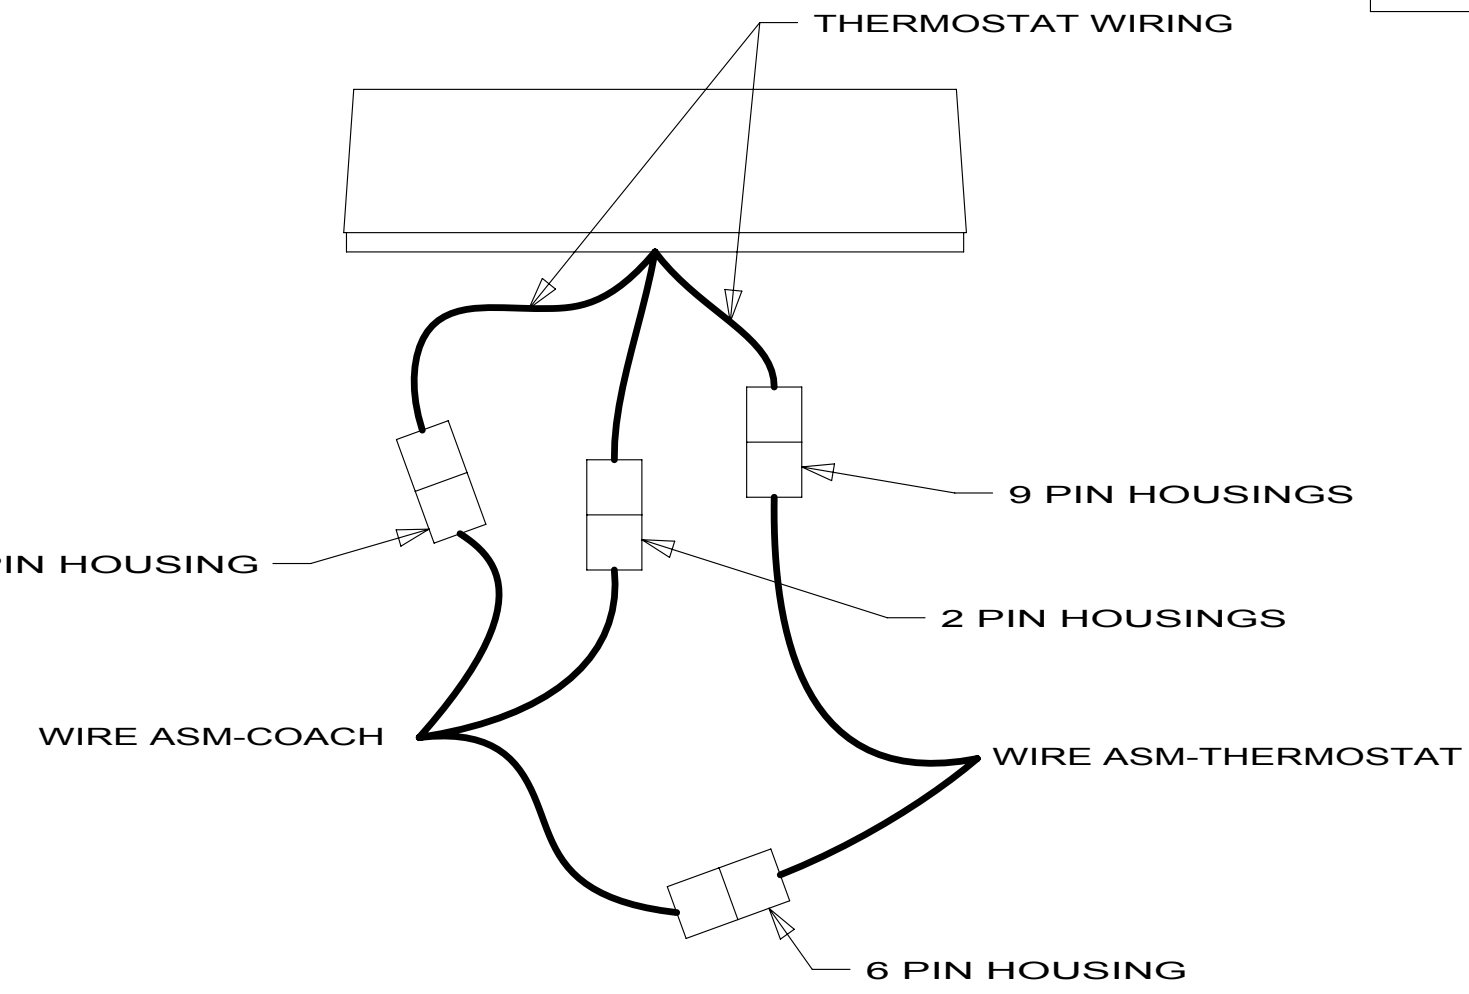

DETAIL DD

CIRCUIT BREAKER
093654-02-000 (15)
(15 AMP)
SCREW
000G52-06-04B (15)

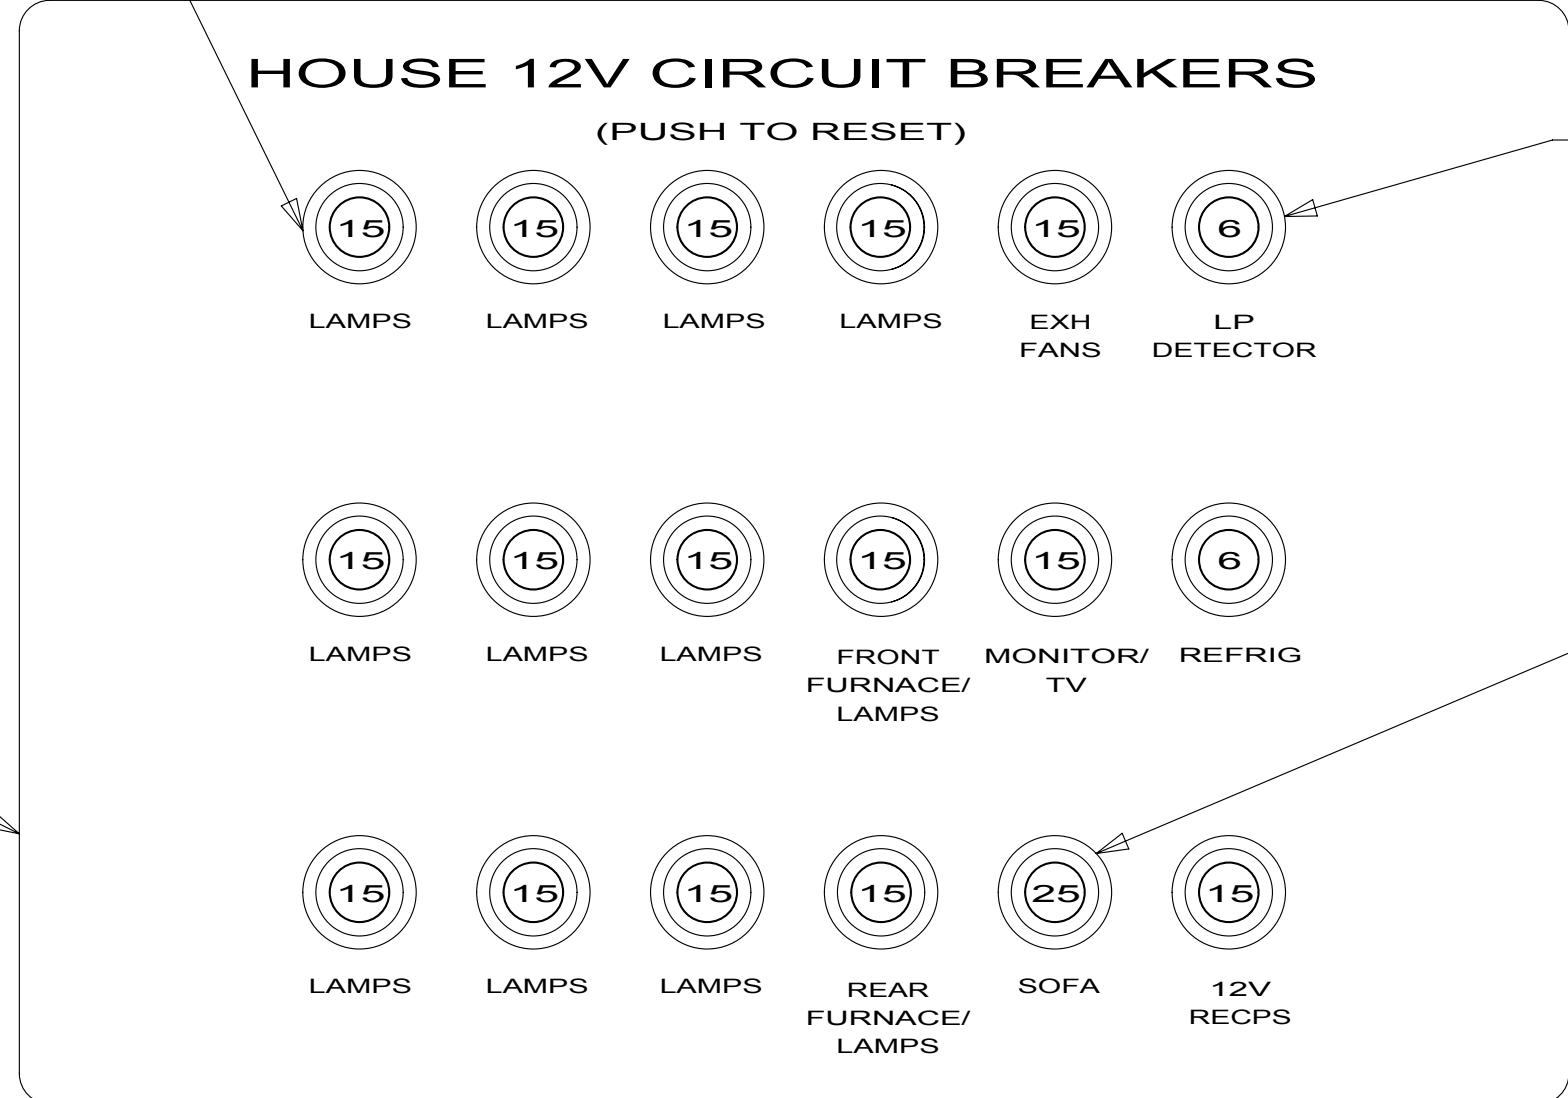

DETAIL DA
(FRONT VIEW)

CIRCUIT BREAKER
093654-01-000 (2)
(6 AMP)
SCREW
000G52-06-04B (2)

CIRCUIT BREAKER
093655-01-000 (25 AMP)
SCREW
000G52-06-04B
WASHER
OME02B

PLATE
139067-06-02B
LABEL
092547-14-000
SCREW
000G11-10-12B (4)

LABEL-CAUTION,NO EXIT
174054-01-01A

LABEL
116549-02-000

PANEL-MONITOR
134940-08-01A
SCREW
000G11-08-08U (4)

PLATE
163987-01-02B
SWITCH-KEY LOCK
163097-01-000
LABEL
163988-02-01A
SCREW
076790-05-000 (4)

PLATE-SWITCH
144363-09-02B
SWITCH
108357-06-000
ACTUATOR
108356-01-01A
NUT
000D65-08-00B (2)
LABEL
116220-02-000
(CIRCUITS
PPM,PPS,PPN,
PPN,PPT,PPM,
SSA,PPM)

LABEL
163992-01-01A

SWITCH-SLIDEOUT
171341-01-000
SCREW
076790-05-000 (2)
(CIRCUITS SSP,DU,
GGD,GGE,DR,GGF)


PLATE-SWITCH
144363-09-02B
SWITCH
108357-06-000
ACTUATOR
108356-01-01A
NUT
000D65-08-00B (2)
LABEL
116220-02-000
(CIRCUITS
PPP,PPV,PPN,
PPN,PPU,PPP,
SSB,PPP)

LABEL
163992-02-01A

SWITCH-SLIDEOUT
171341-01-000
SCREW
076790-05-000 (2)
(CIRCUITS SSN,HHF,
NNN,NNP,HHE,NNR)

MODULE
158425-01-000 32W

THERMOSTAT
105620-21-000
GASKET
134588-09-000
DETAIL DD

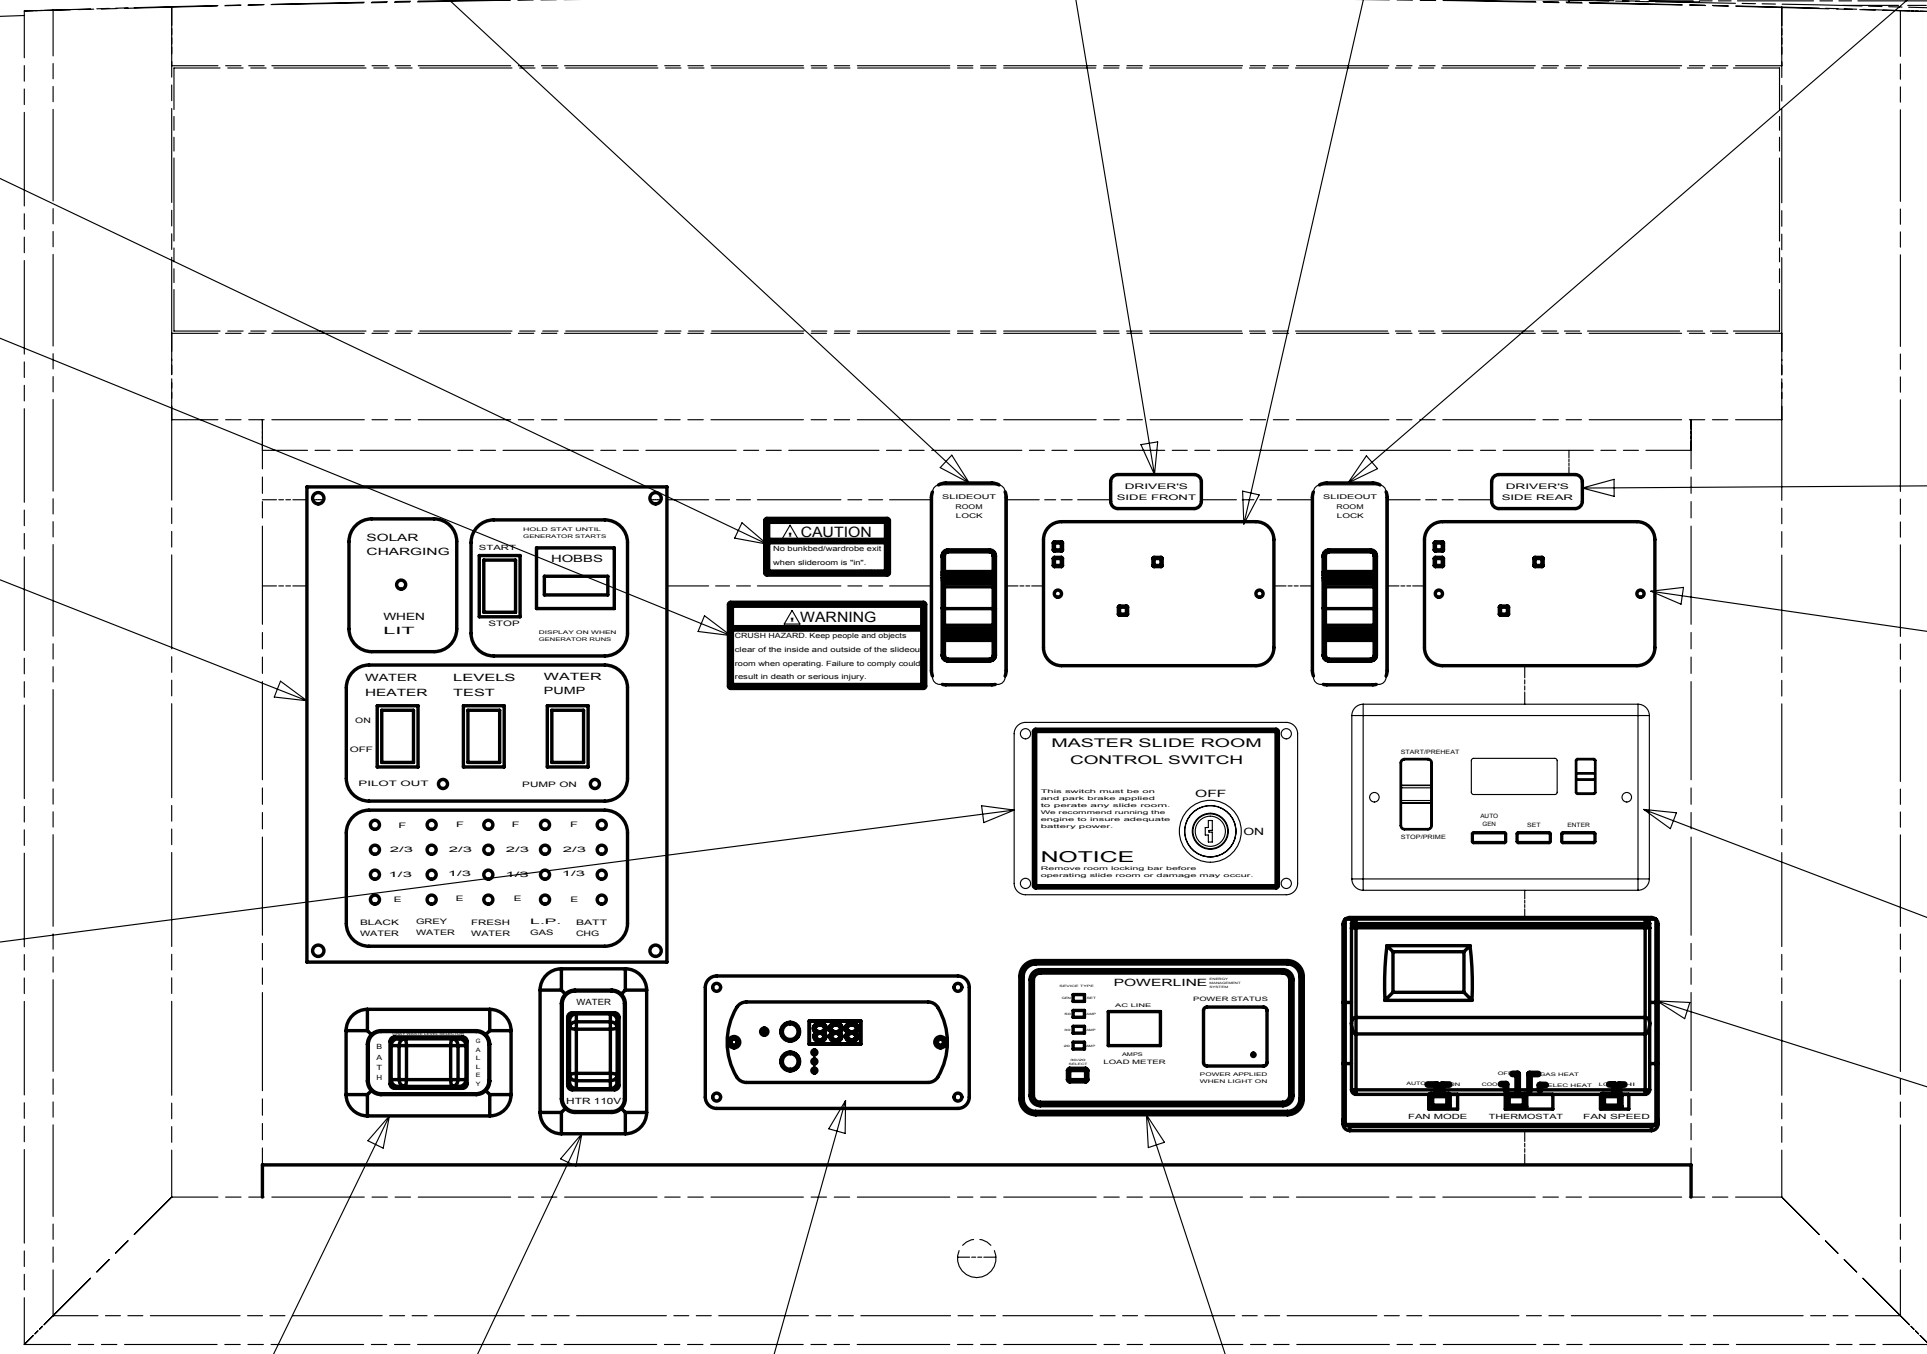

SWITCH
DETAIL EP

SWITCH
DETAIL EN

REMOTE PANEL-INVERTER
173337-02-000
MODULE-12V DISCONNECT
173355-01-000
DETAIL JB

VIEW DC

1 INSTALL GASKET ON BACKSIDE OF ONE PLACE AFTER INSTALLATION OF THERMOSTAT, MAKING SURE THAT THE GASKET COVERS AND SEALS THE HOLE THAT THE WIRES PASS THROUGH.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 32W GENERATOR-START,AUTO SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


1B1 265

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 4	PART NO 172894	REV

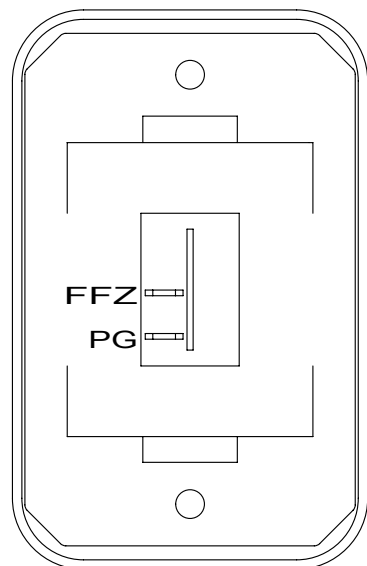


SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-01-01A
SCREW
000G11-08-08B (2)

DETAIL EA

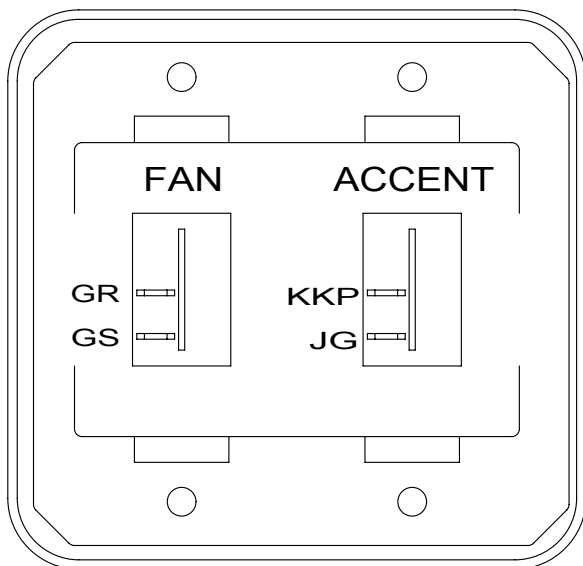


SWITCH-ROCKER
135740-01-01A(2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-49-02A
SCREW
000G11-06-16B (4)

DETAIL EE

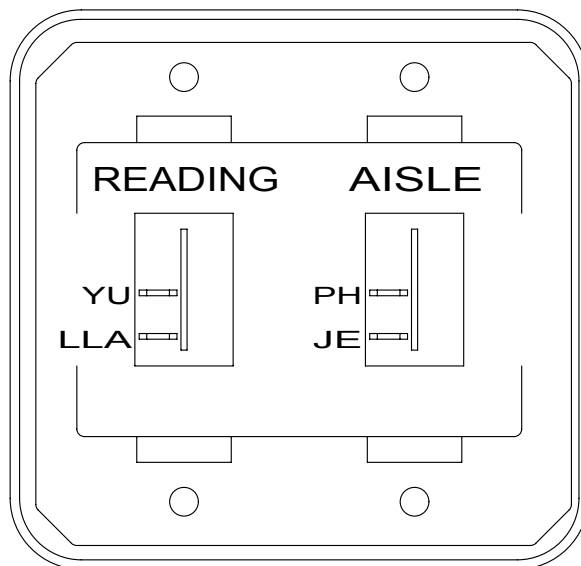


SWITCH-ROCKER
135740-01-01A(2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-21-02A
SCREW
000G11-08-08B (4)

DETAIL EJ

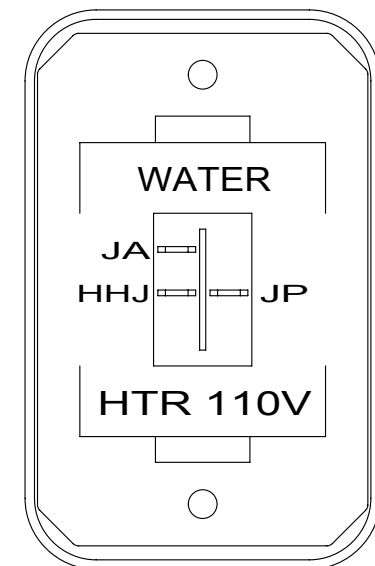

SWITCH-ROCKER
135740-06-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-35-02A
SCREW
000G11-08-08B (2)


DETAIL EN

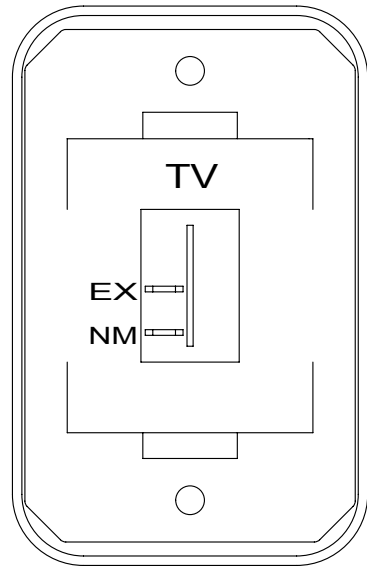

SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-45-02A
SCREW
000G11-08-08B (2)


DETAIL EB

10C

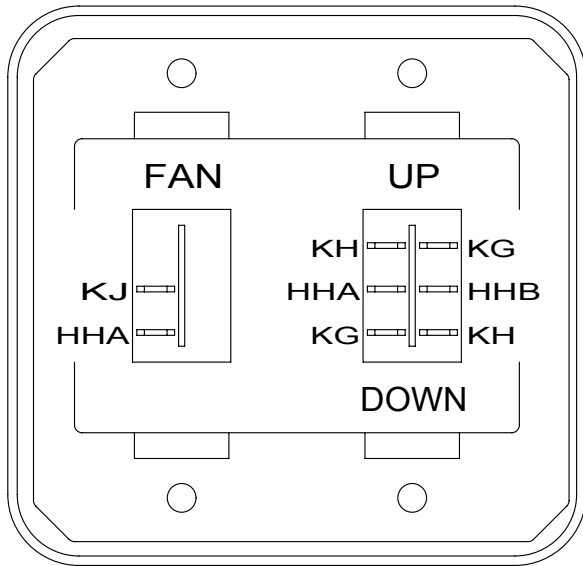


SWITCH-ROCKER
135740-01-01A
135740-03-01A
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-17-02A
SCREW
000G11-08-08B (4)

DETAIL EF

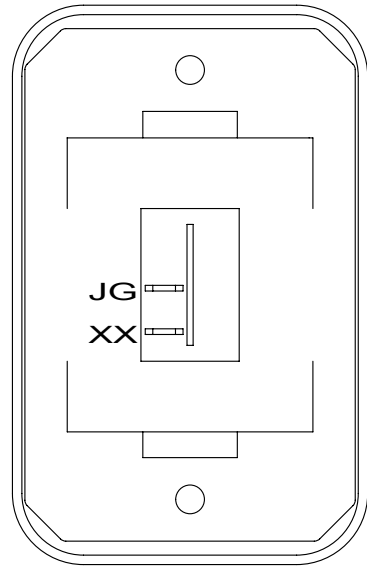


SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-01-01A
SCREW
000G11-08-08B (2)

DETAIL EC

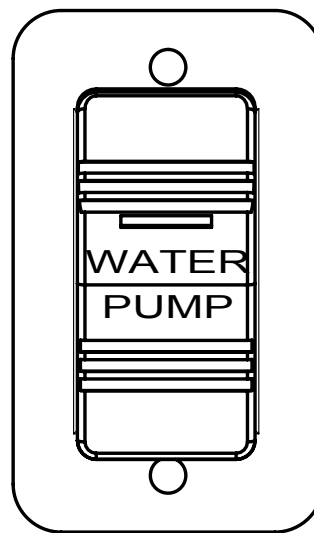

SWITCH-PUMP
108357-15-000
ACTUATOR
108356-23-02A
PLATE
098351-07-03A
SCREW
000G11-06-10B (2)

DETAIL EG

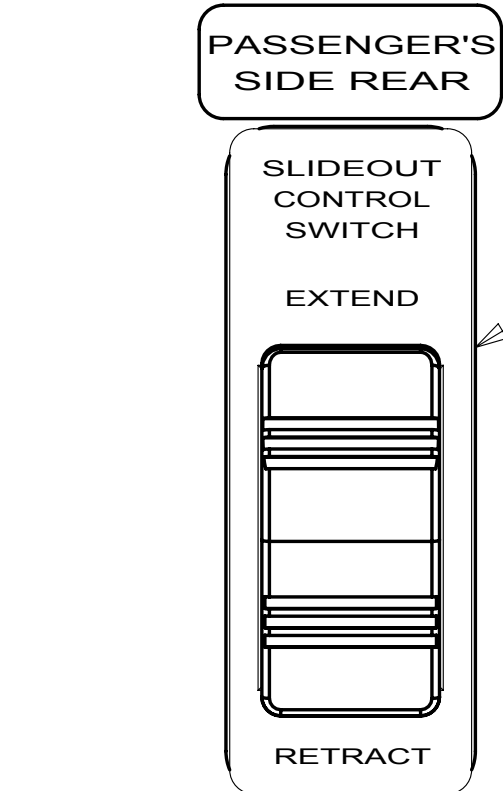


LABEL-SLIDEOUT,PASS,REAR
163992-03-01A

PLATE-SWITCH
144363-09-02B
SWITCH
108357-07-01A
ACTUATOR
108356-01-01A
NUT
000D65-08-00B (2)
LABEL
116220-01-000
(CIRCUITS MMA,PPW,MMC)




LABEL-CAUTION,SWINGOUT TV
116549-02-000

DETAIL EK

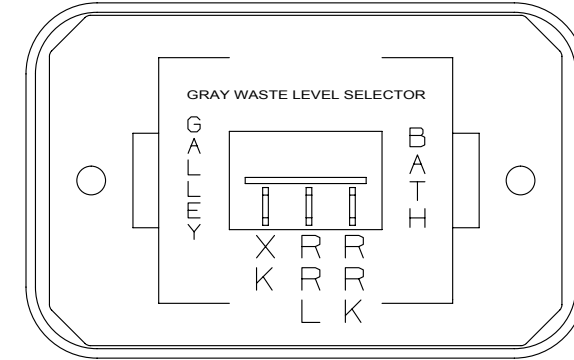


SWITCH-ROCKER
135740-02-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-52-02A
SCREW
000G11-08-08B (2)

DETAIL EP

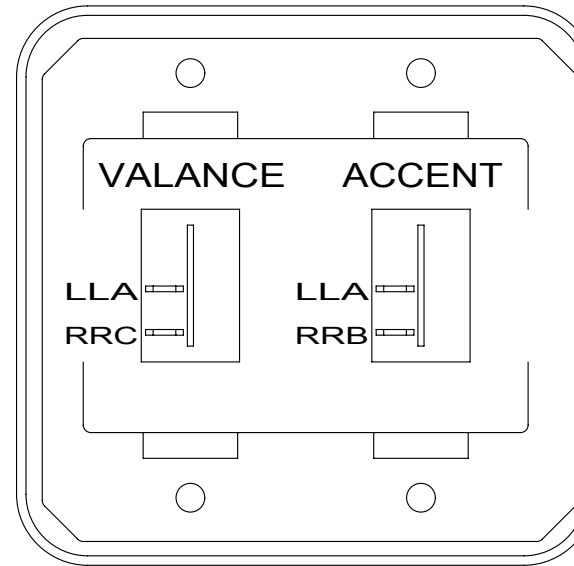


SWITCH-ROCKER
135740-01-01A (2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-36-02A
SCREW
000G11-08-08B (4)

DETAIL ER

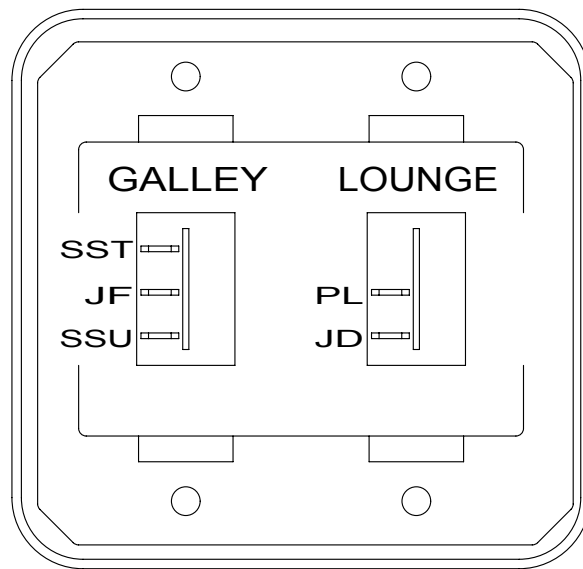


SWITCH-ROCKER
135740-01-01A
135740-02-01A
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-18-02A
SCREW
000G11-08-08B (4)

DETAIL ED

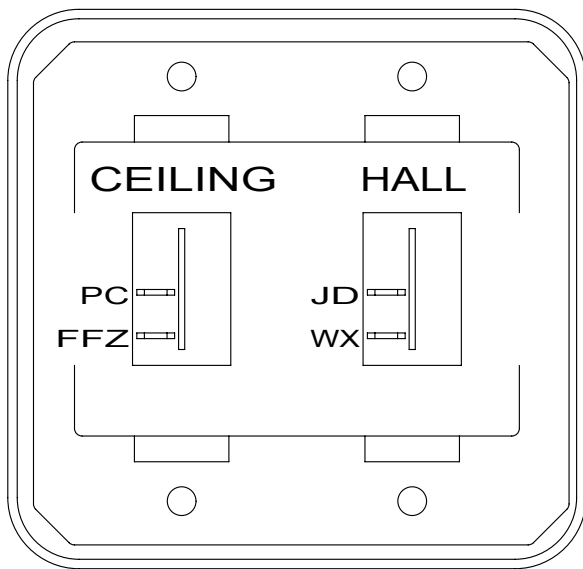


SWITCH-ROCKER
135740-01-01A(2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-16-02A
SCREW
000G11-08-08B (4)

DETAIL EH

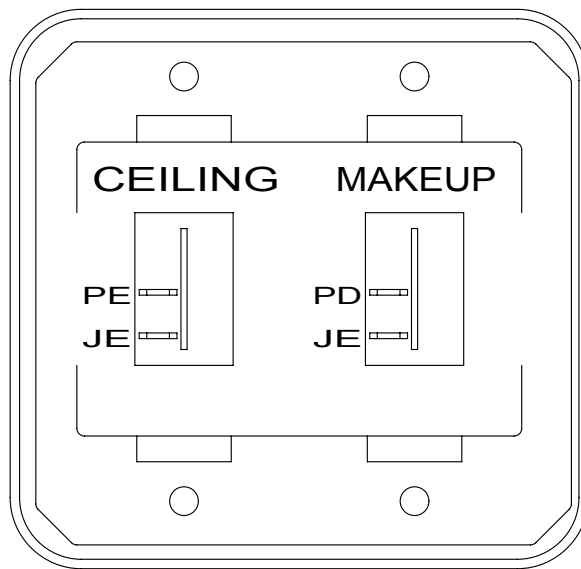


SWITCH-ROCKER
135740-01-01A (2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-14-02A
SCREW
000G11-08-08B (4)

DETAIL EL

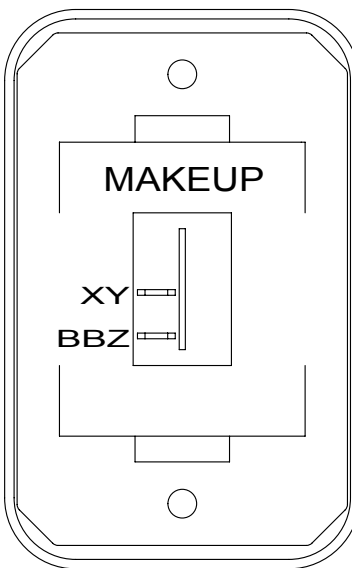

SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-08-02A
SCREW
000G11-08-08B (2)

DETAIL EM

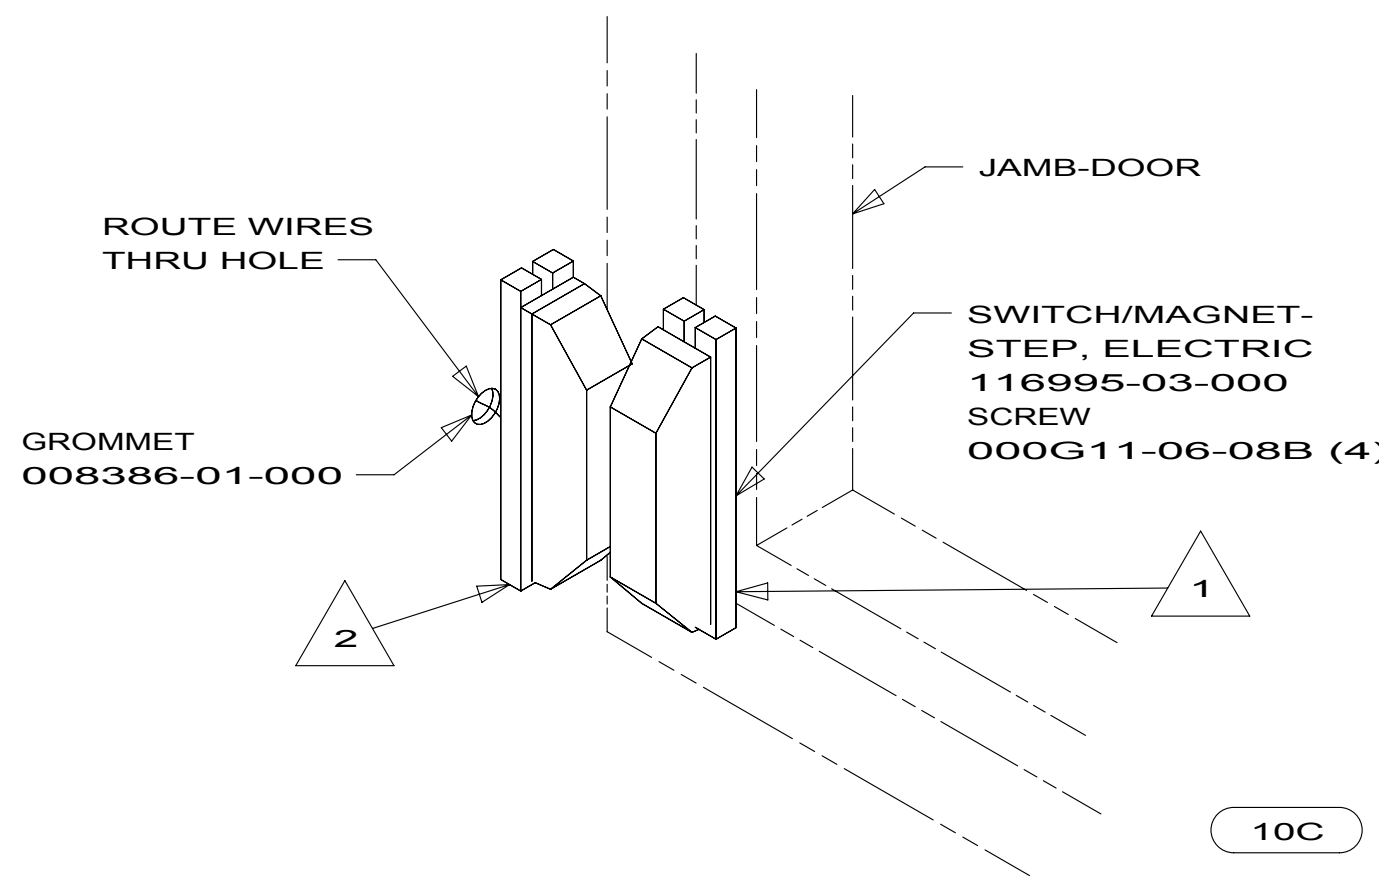

DETAIL ES

- 2 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB
ADJUST HEIGHT TO MATCH MAGNET.
- 1 MOUNT MAGNET USING PILOT HOLES IN SCREEN
DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X
FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 10C DVD PLAYERS(2)W/LCD MONITORS
- 23B BED-KING SIDEWALL (POWERED)
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 5	PART NO 172894	REV

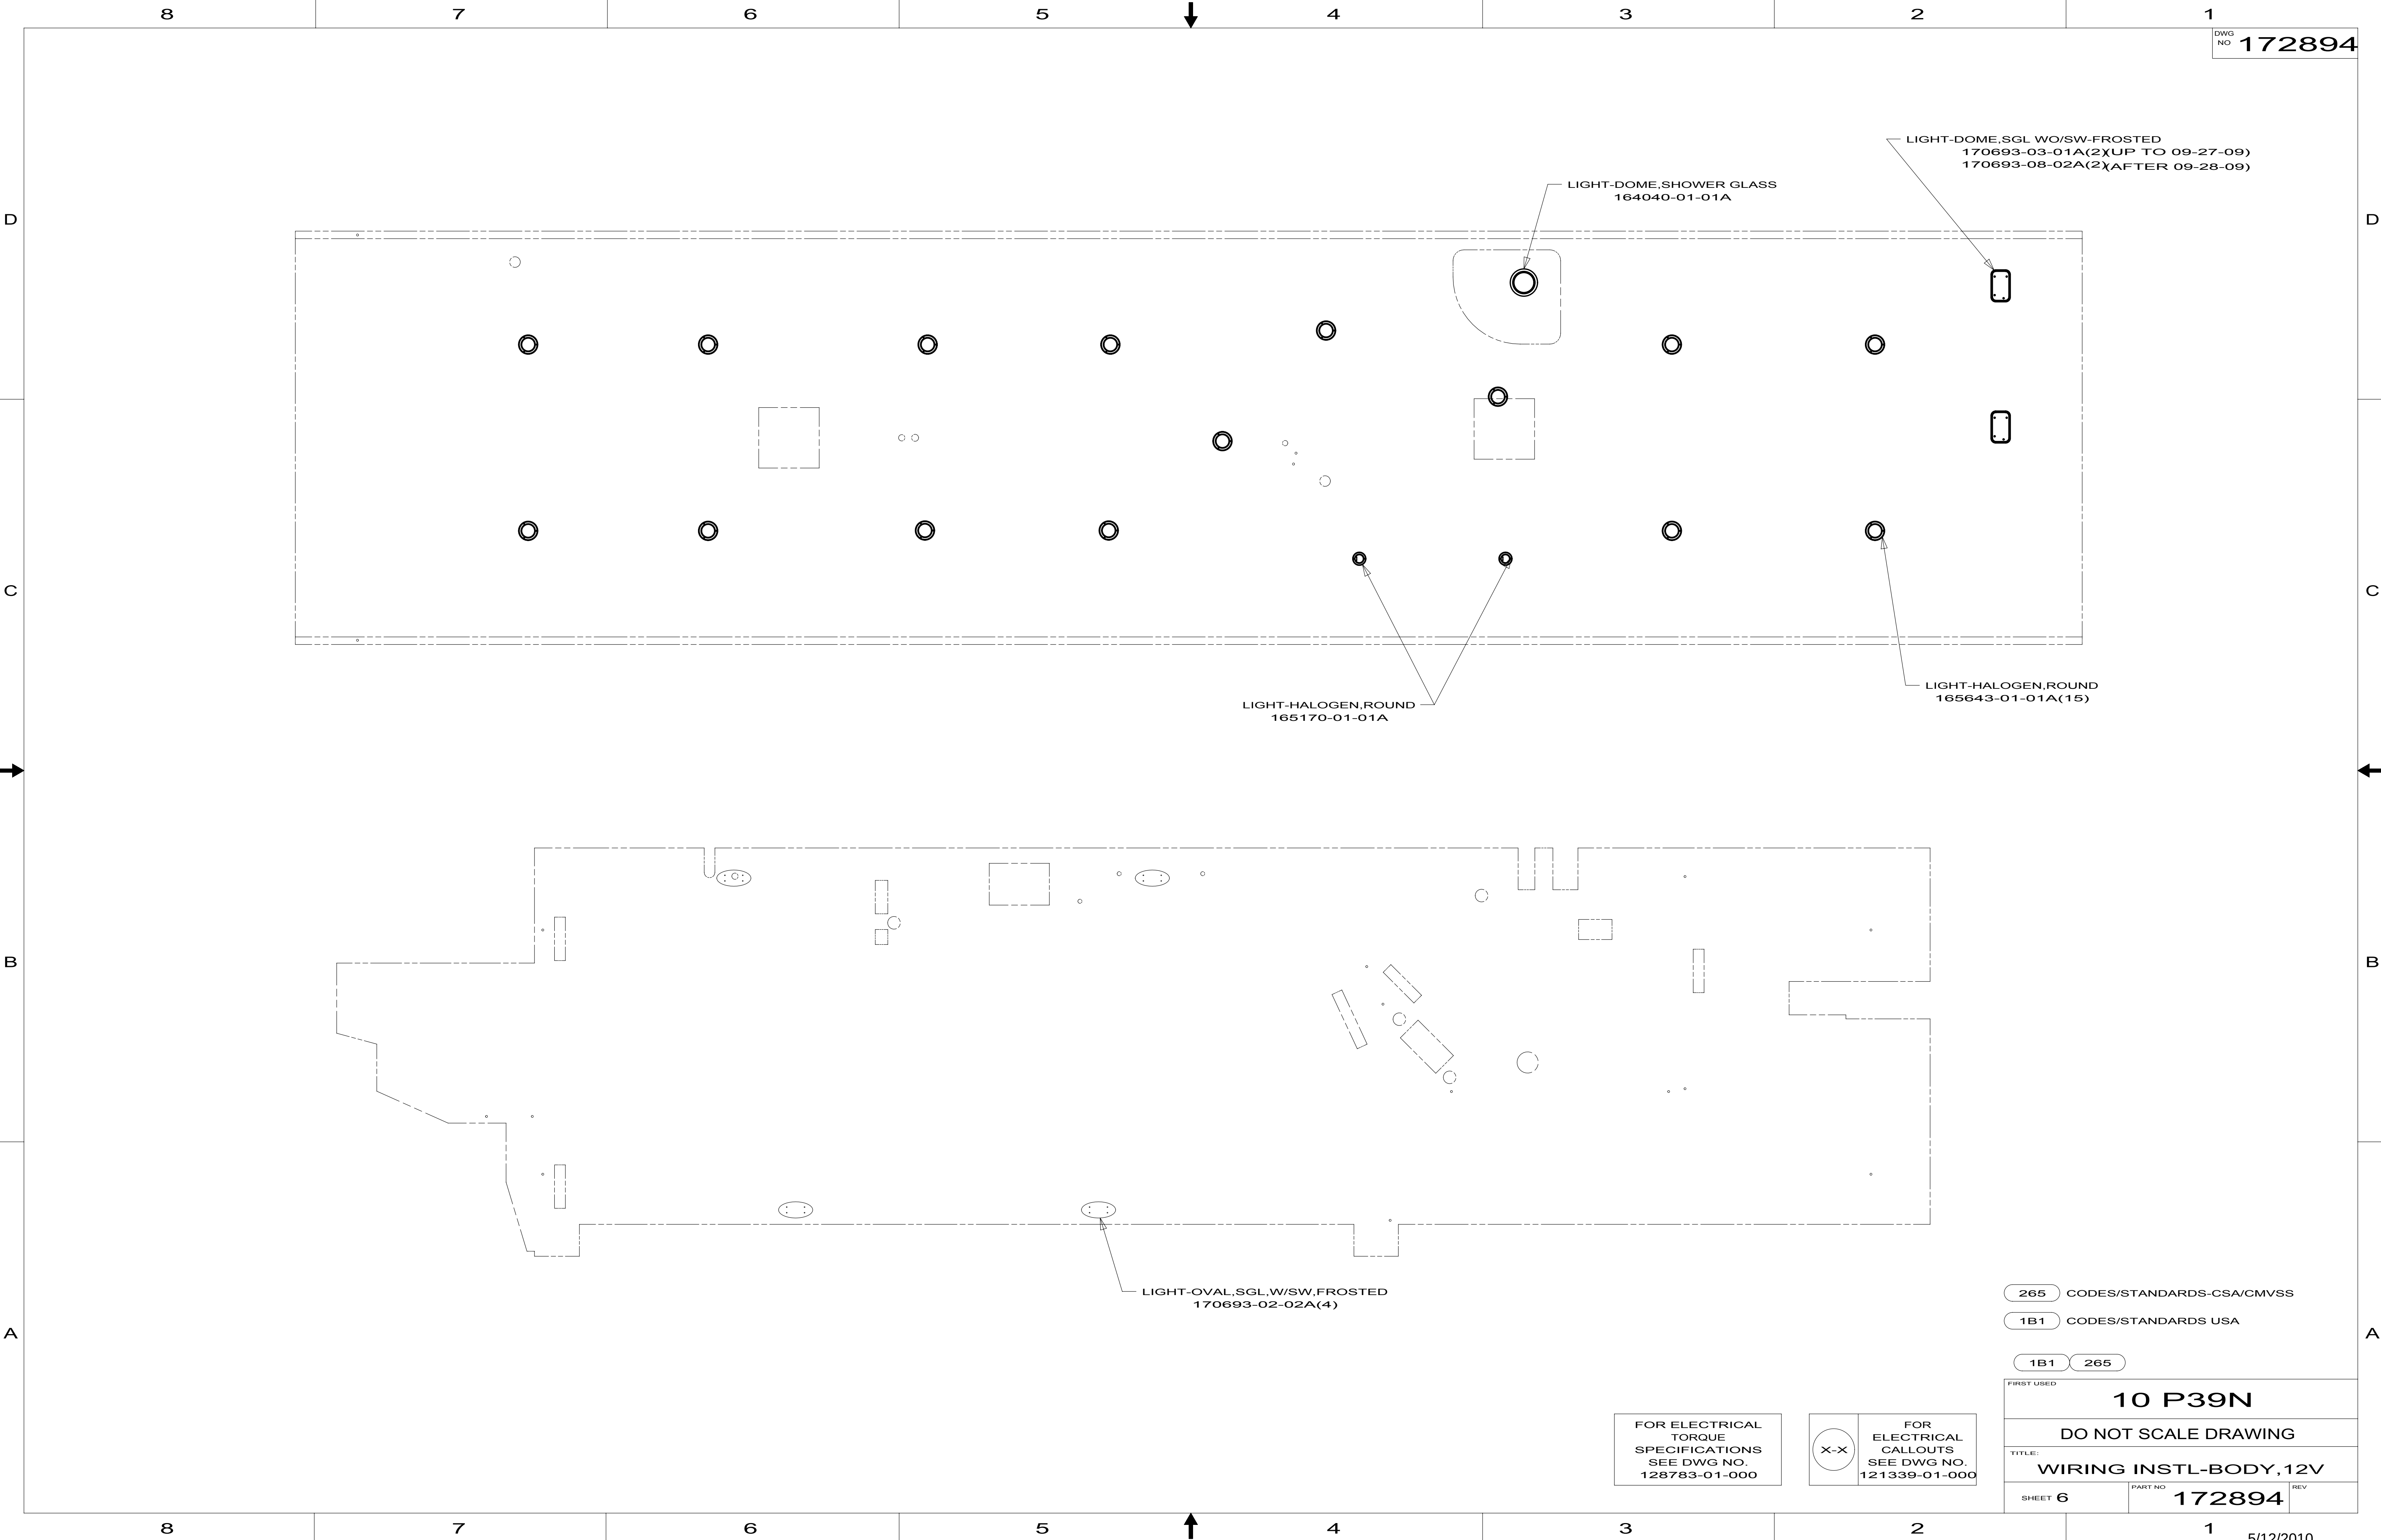

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 6	PART NO 172894	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


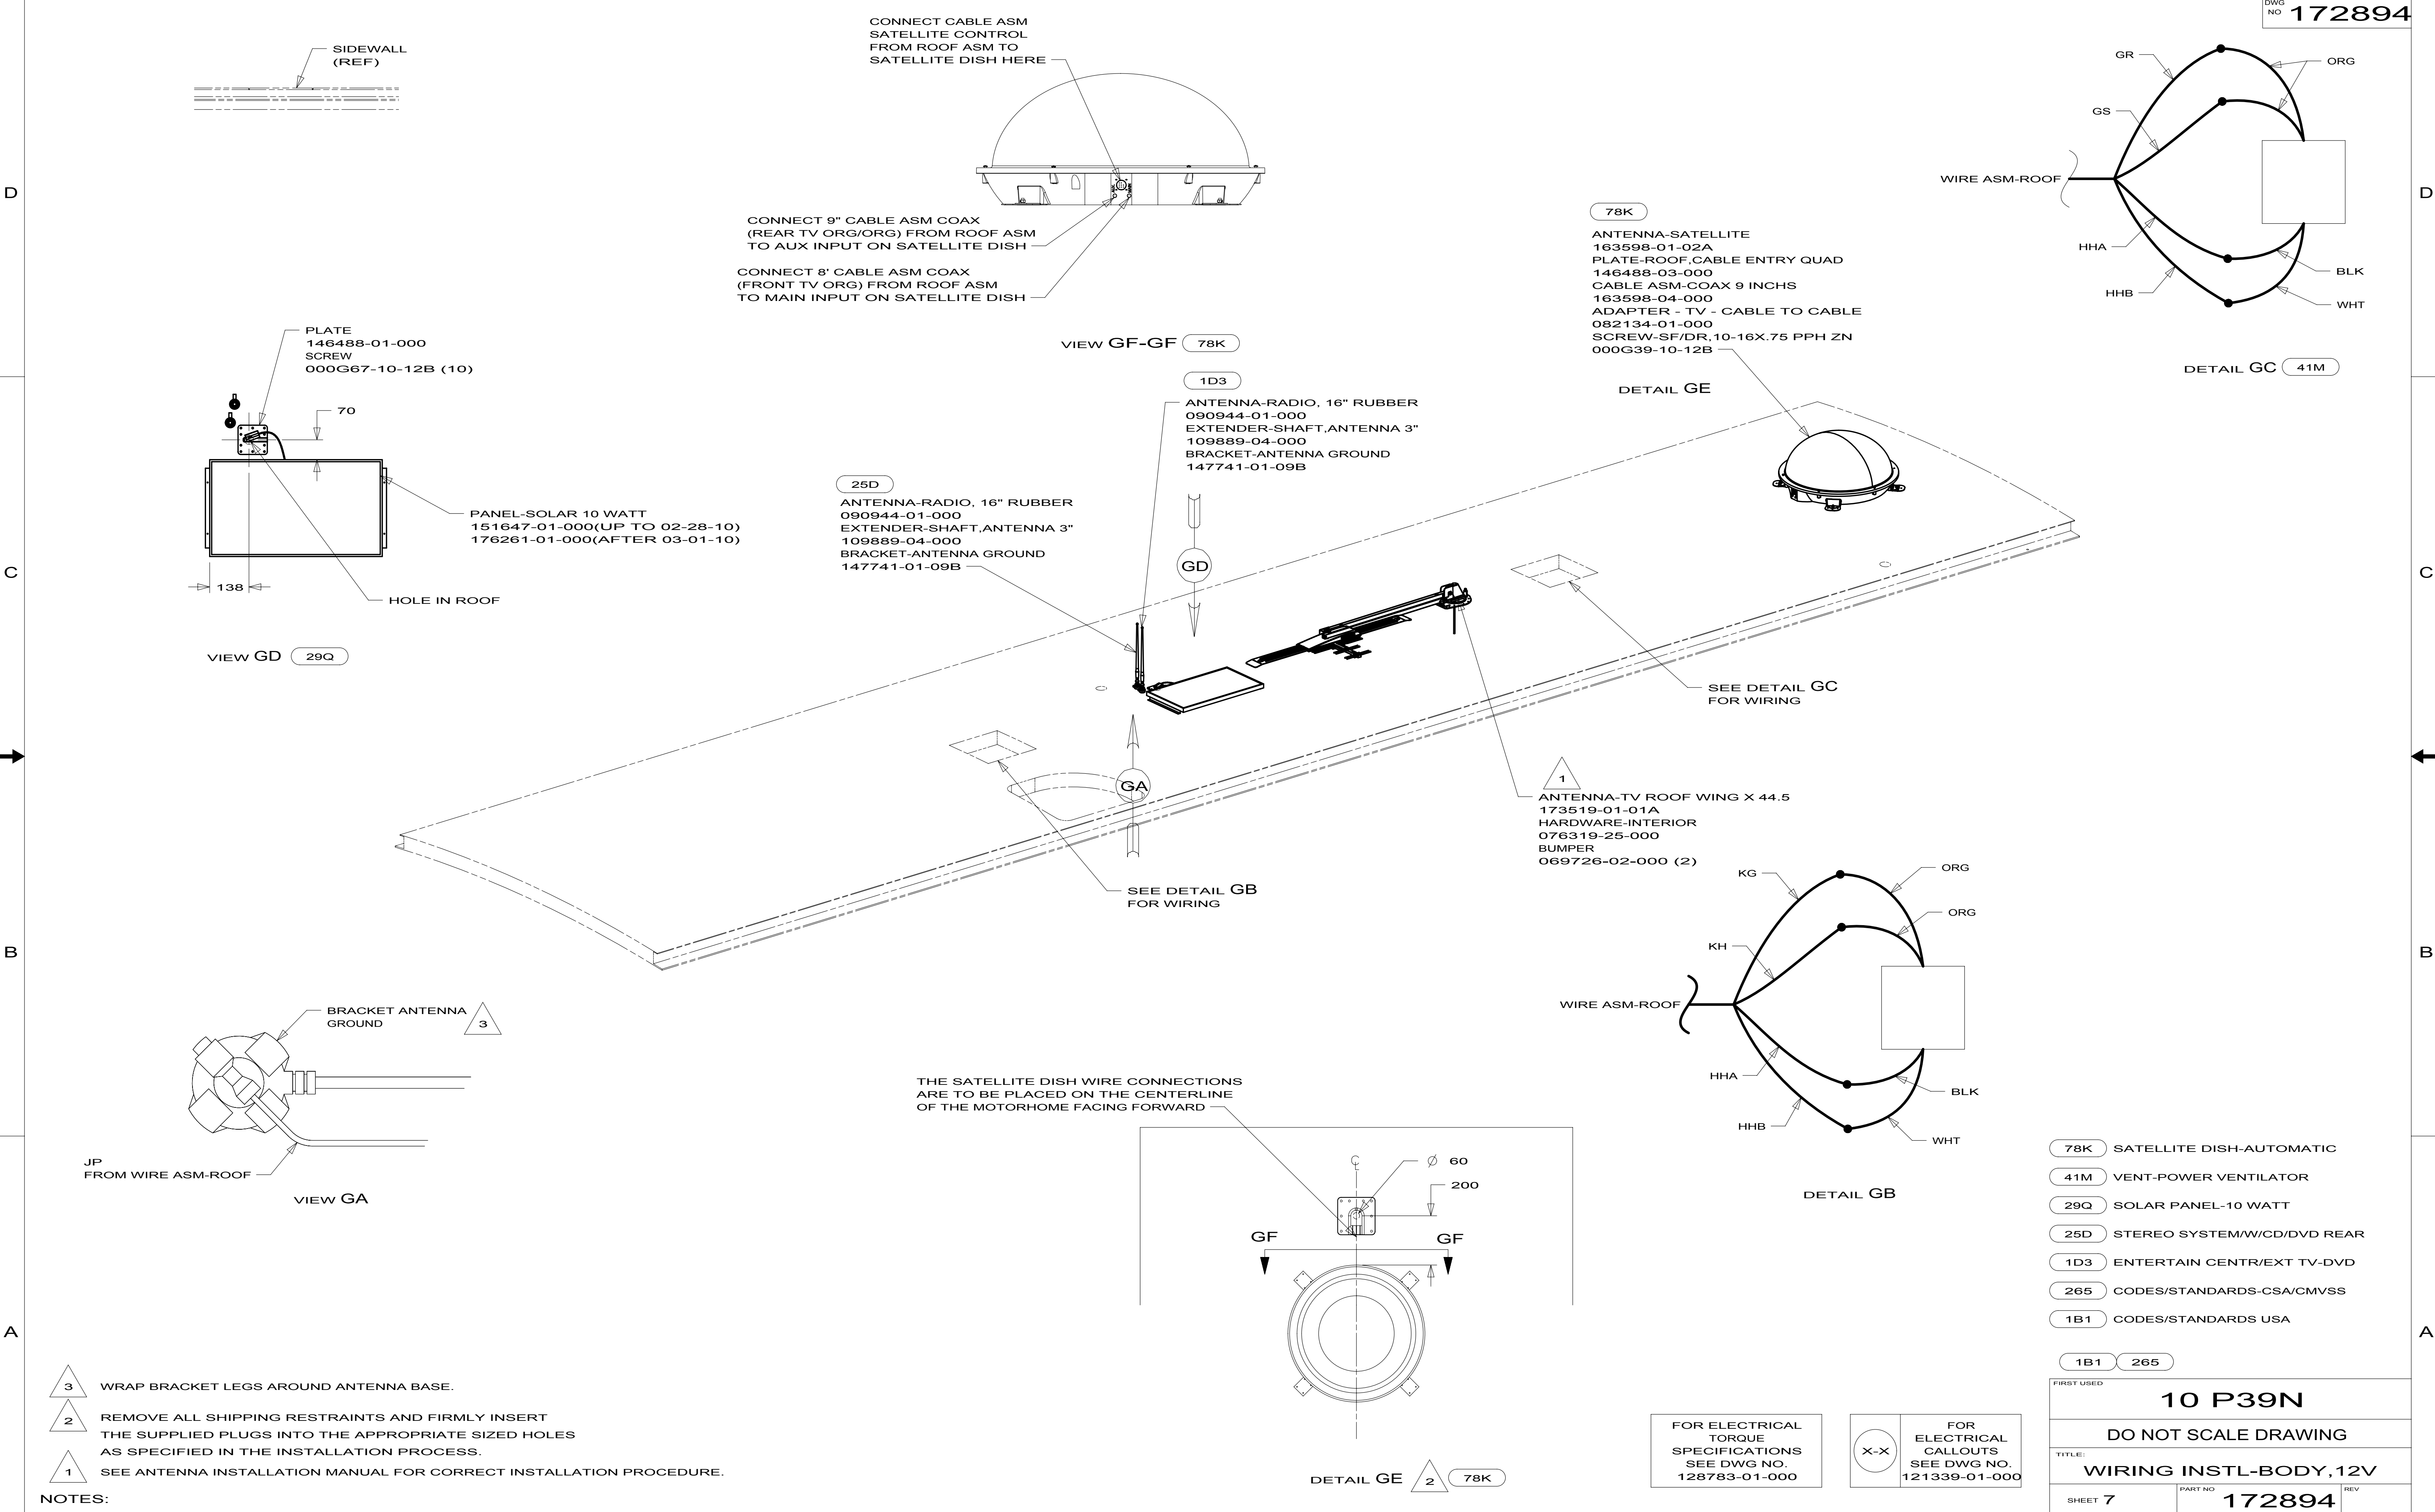











NOTES:

3 WRAP BRACKET LEGS AROUND ANTENNA BASE.

2 REMOVE ALL SHIPPING RESTRAINTS AND FIRMLY INSERT THE SUPPLIED PLUGS INTO THE APPROPRIATE SIZED HOLES AS SPECIFIED IN THE INSTALLATION PROCESS.

1 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.

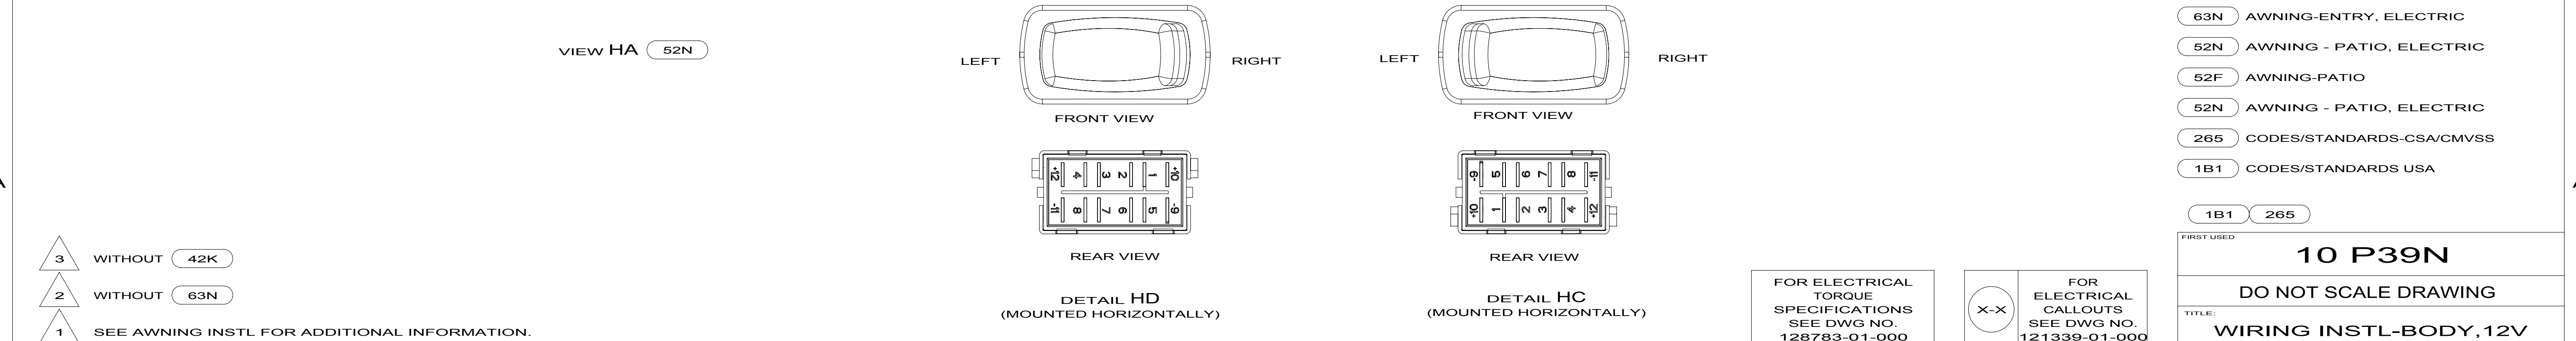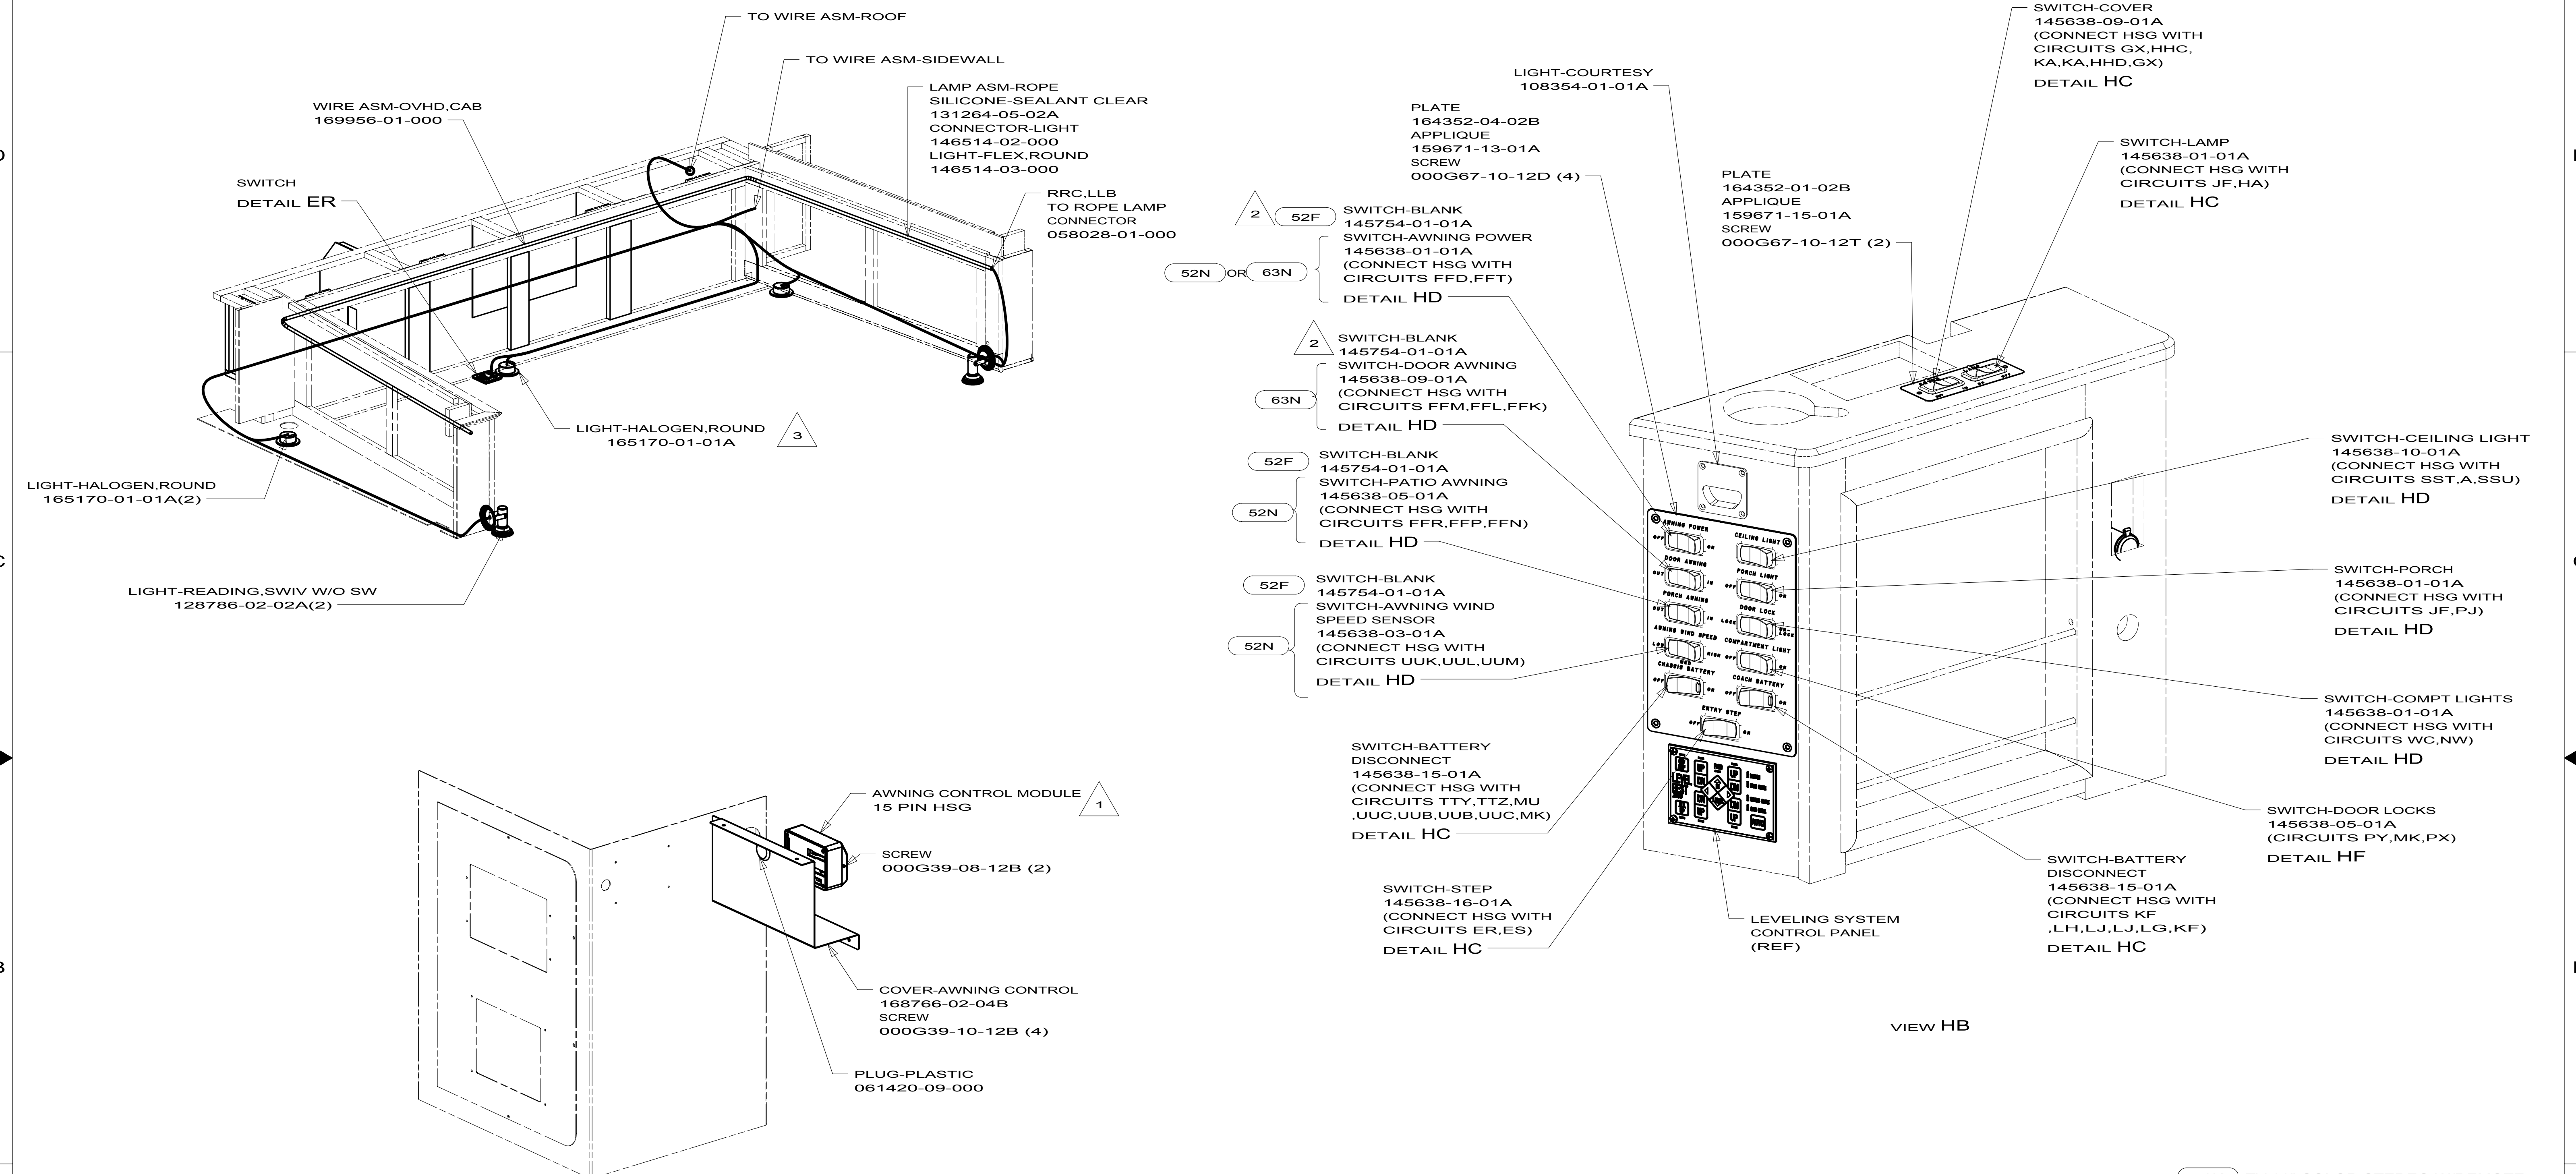

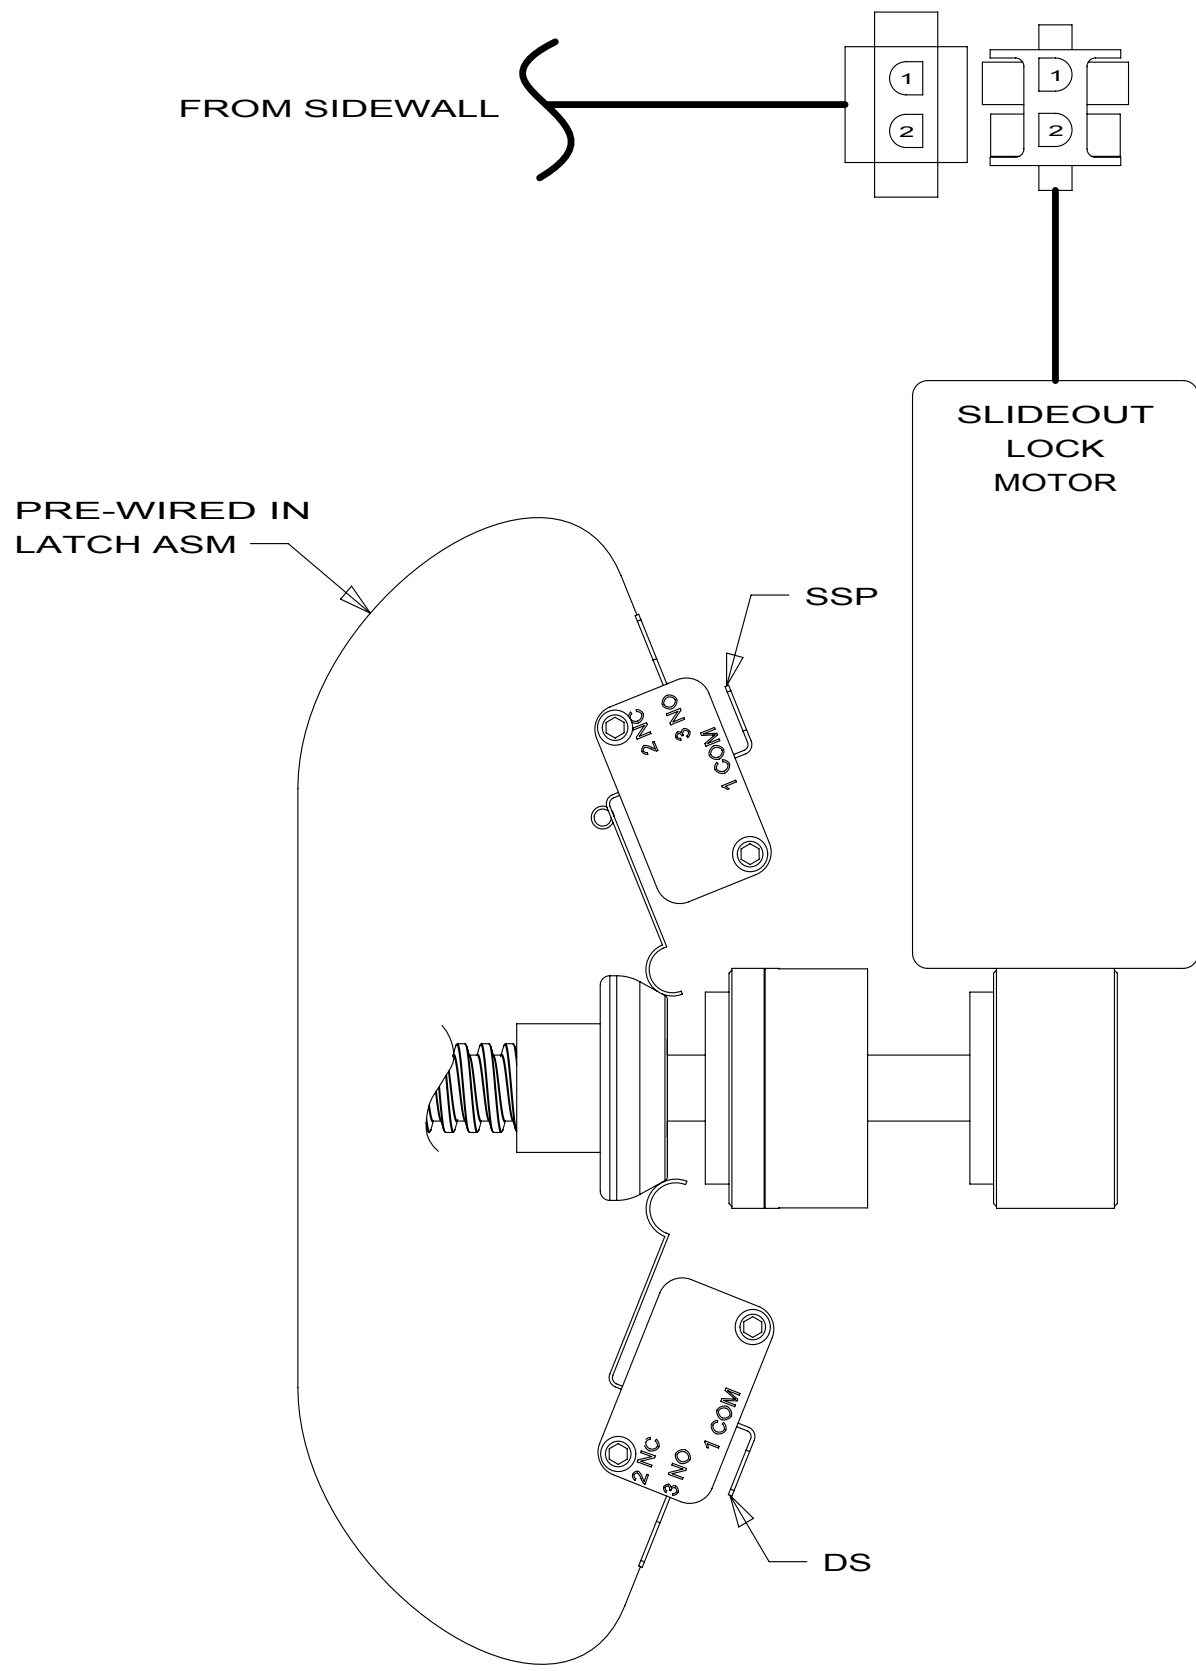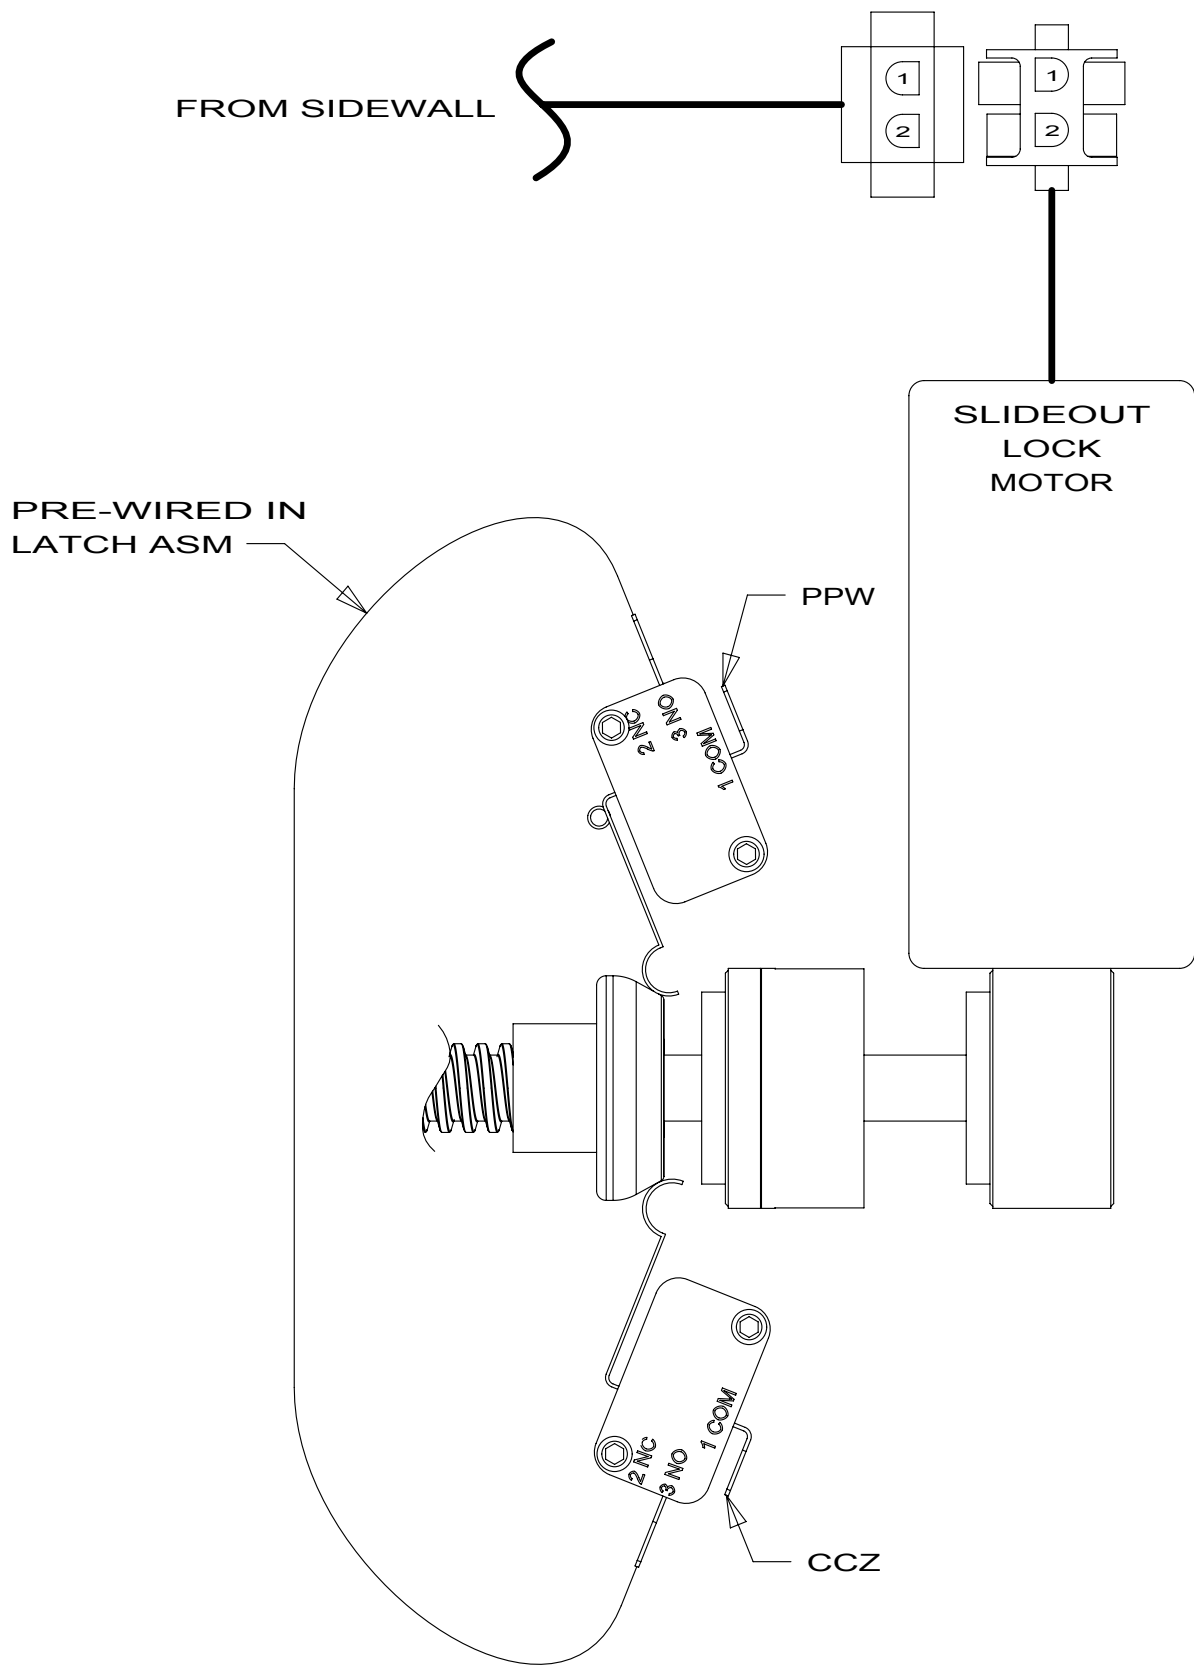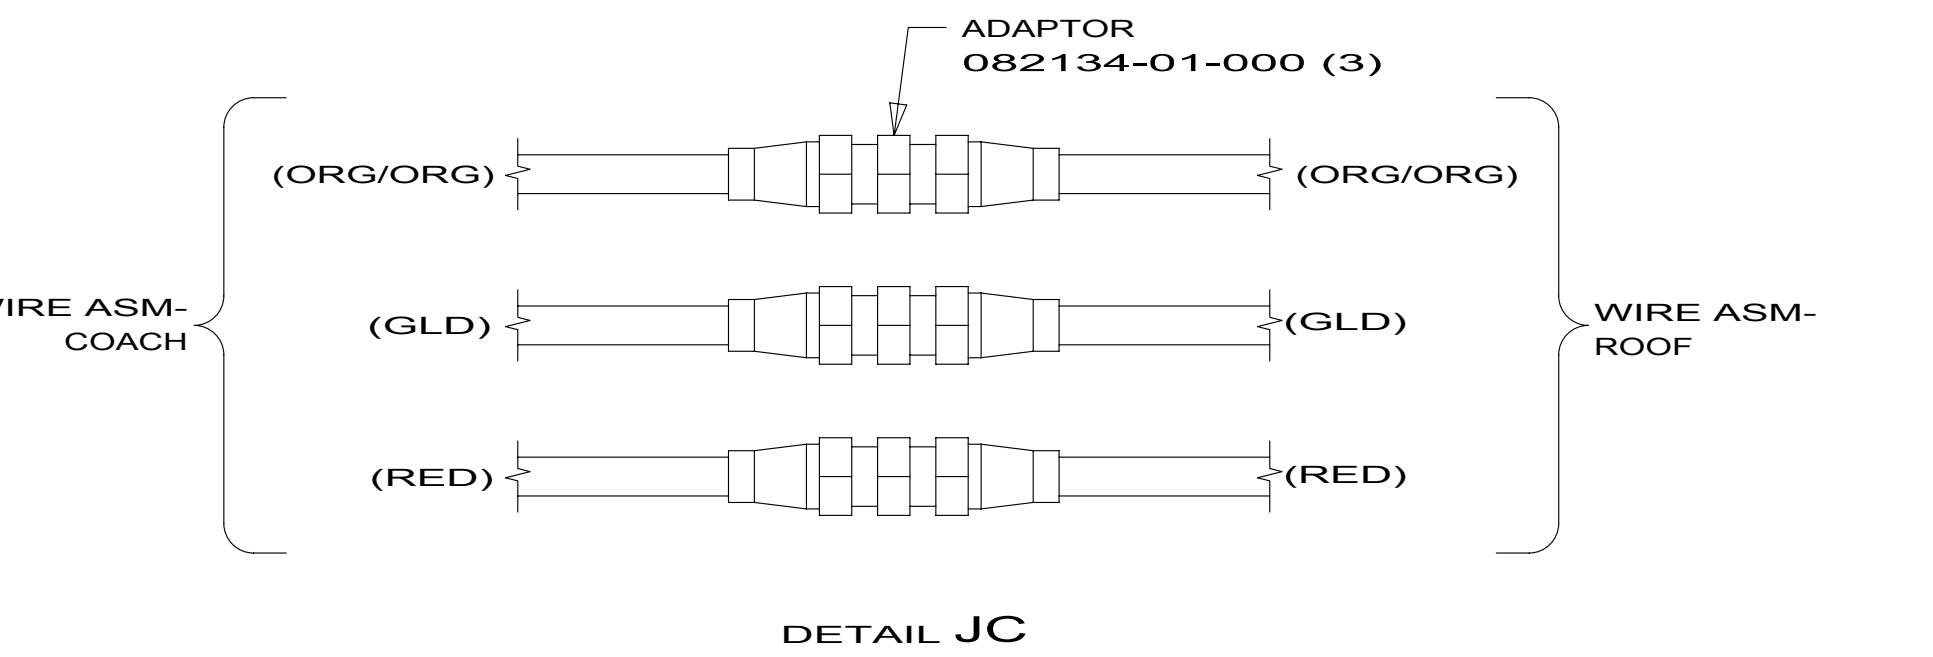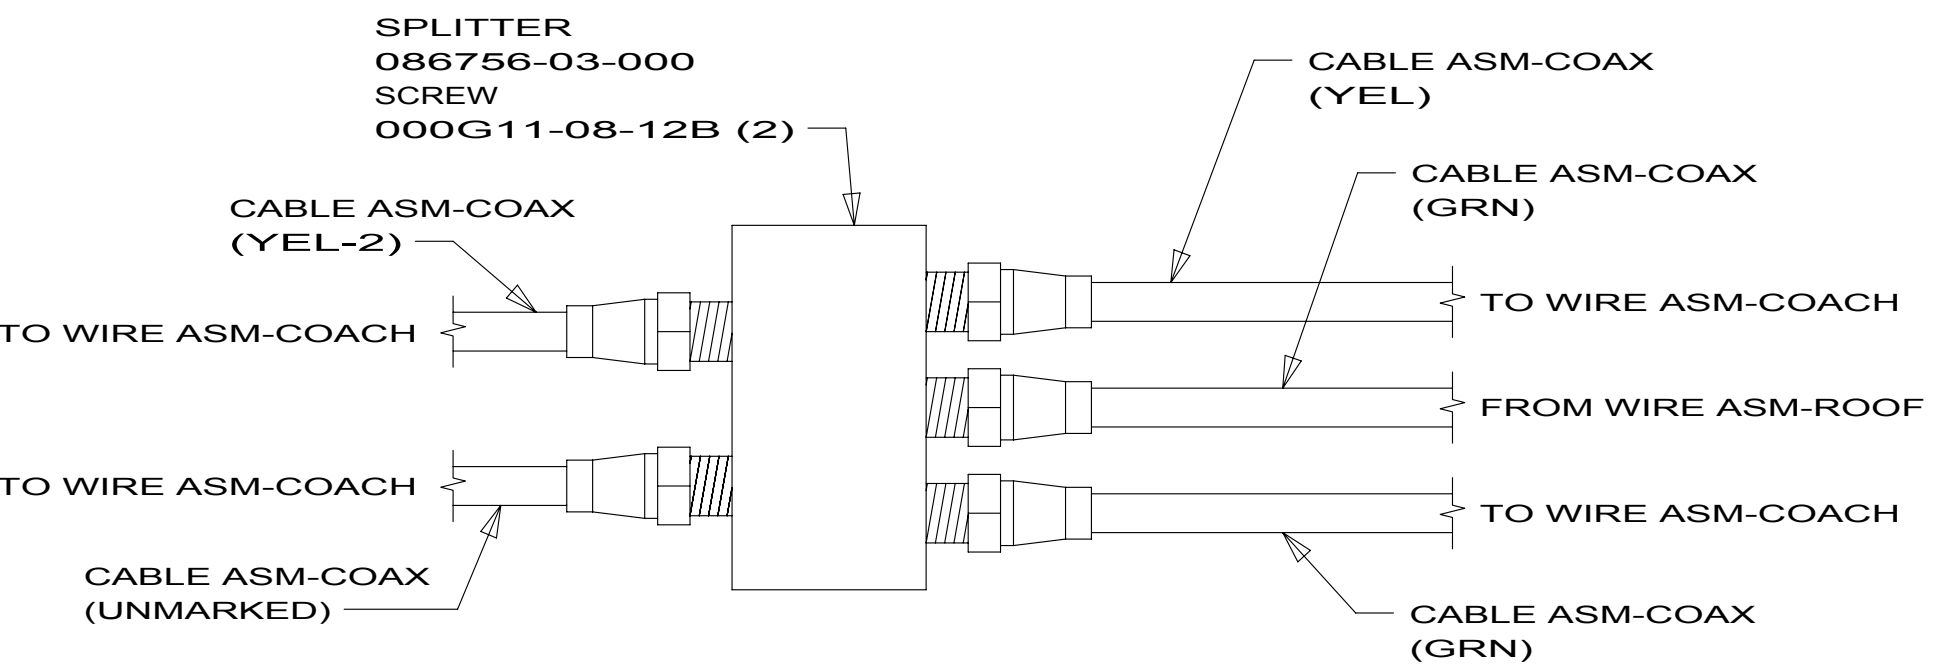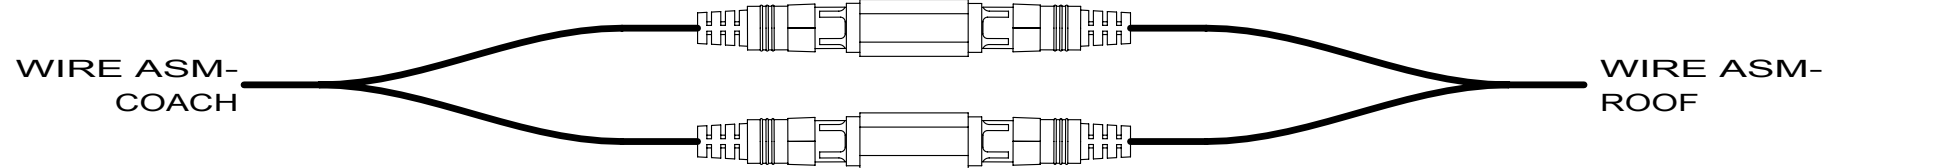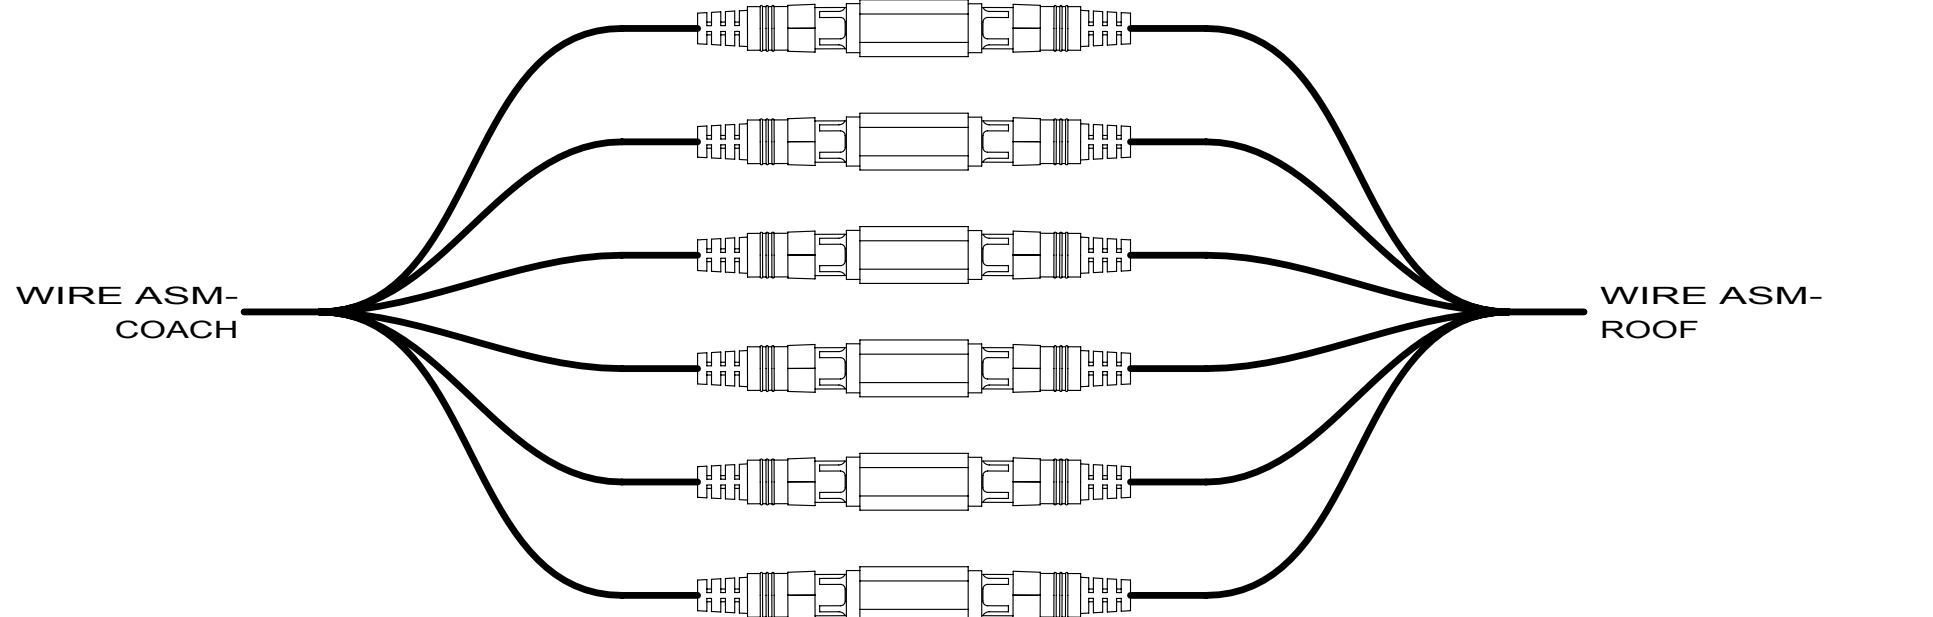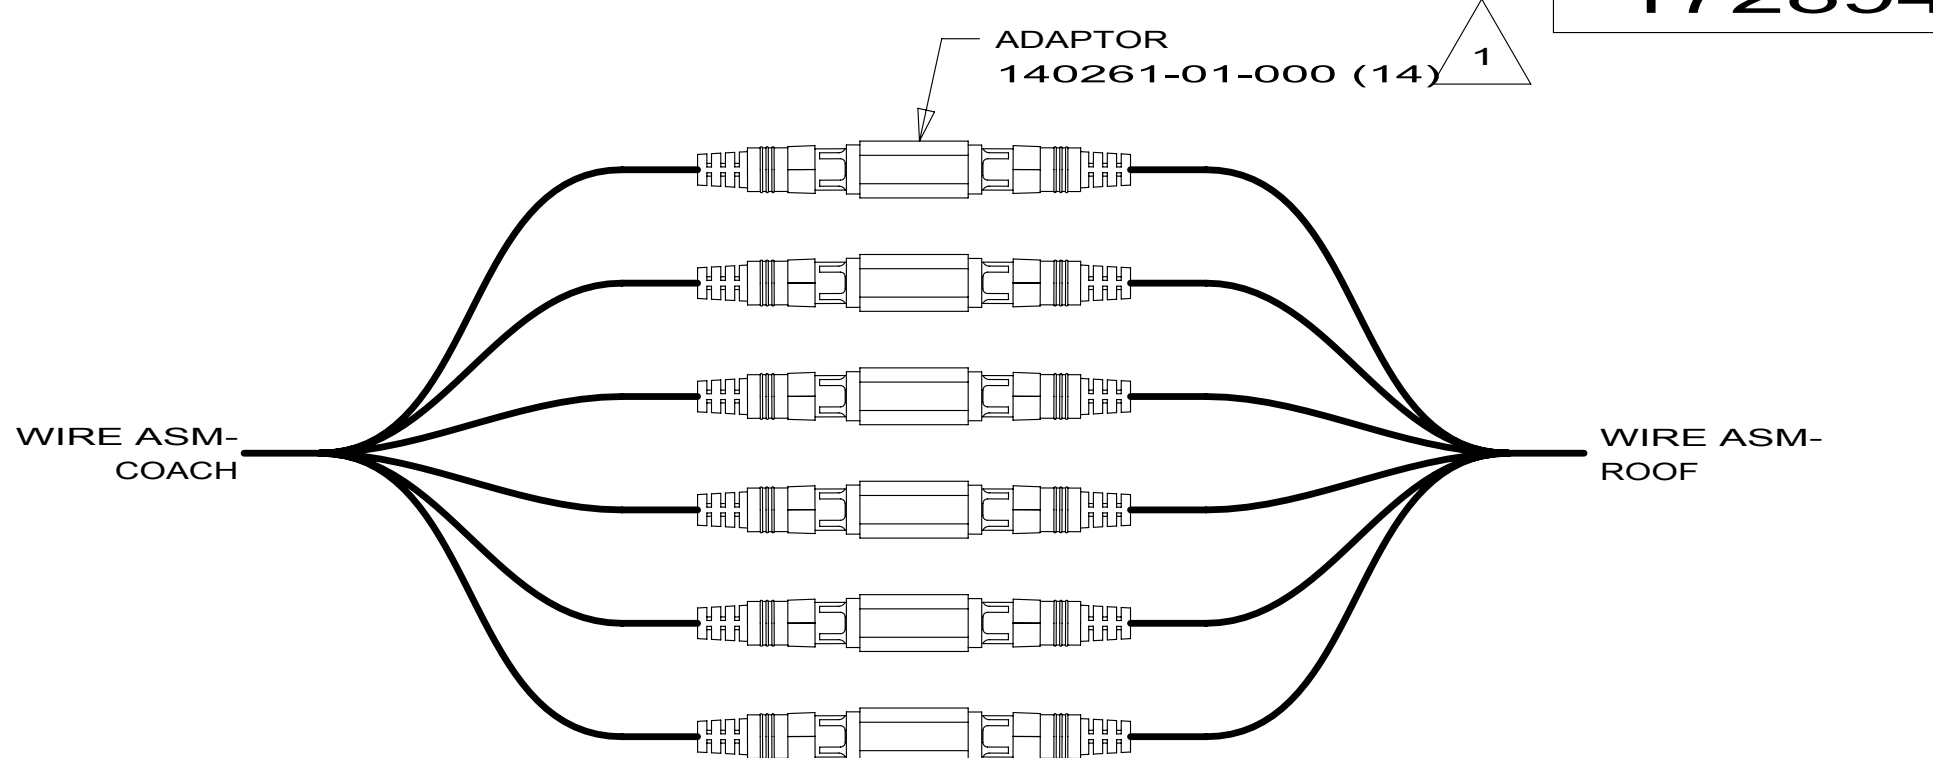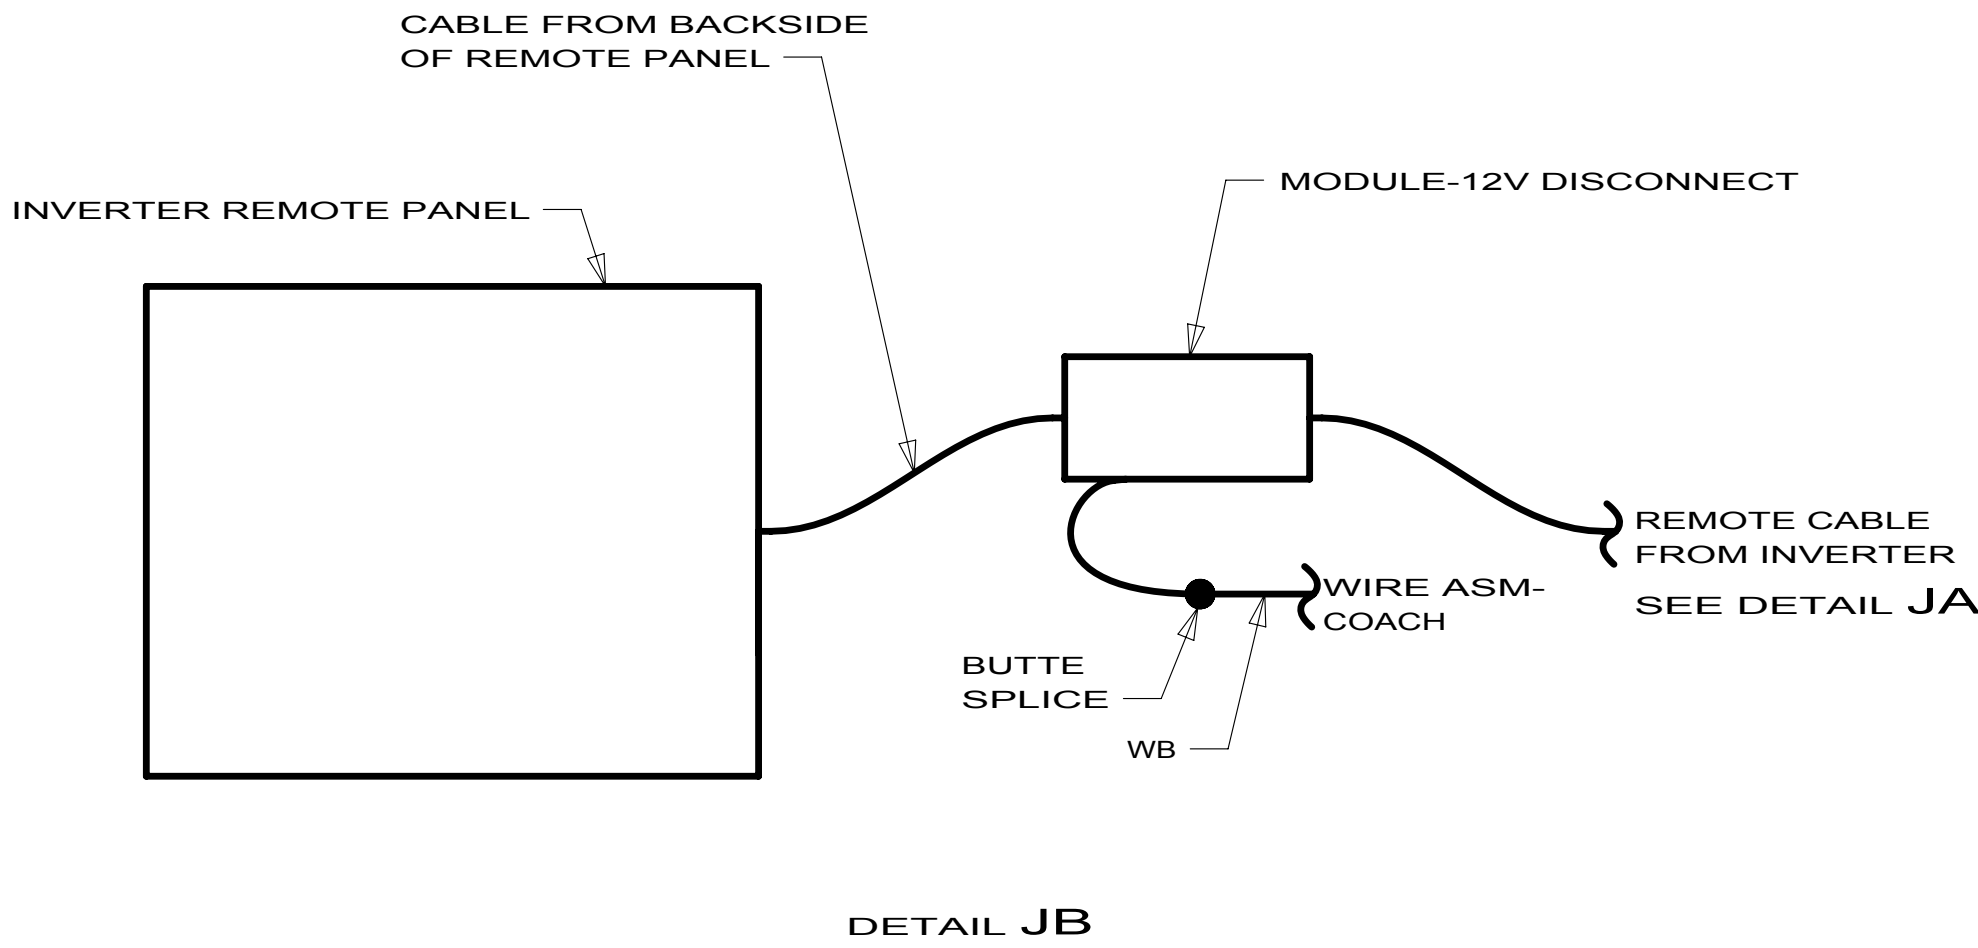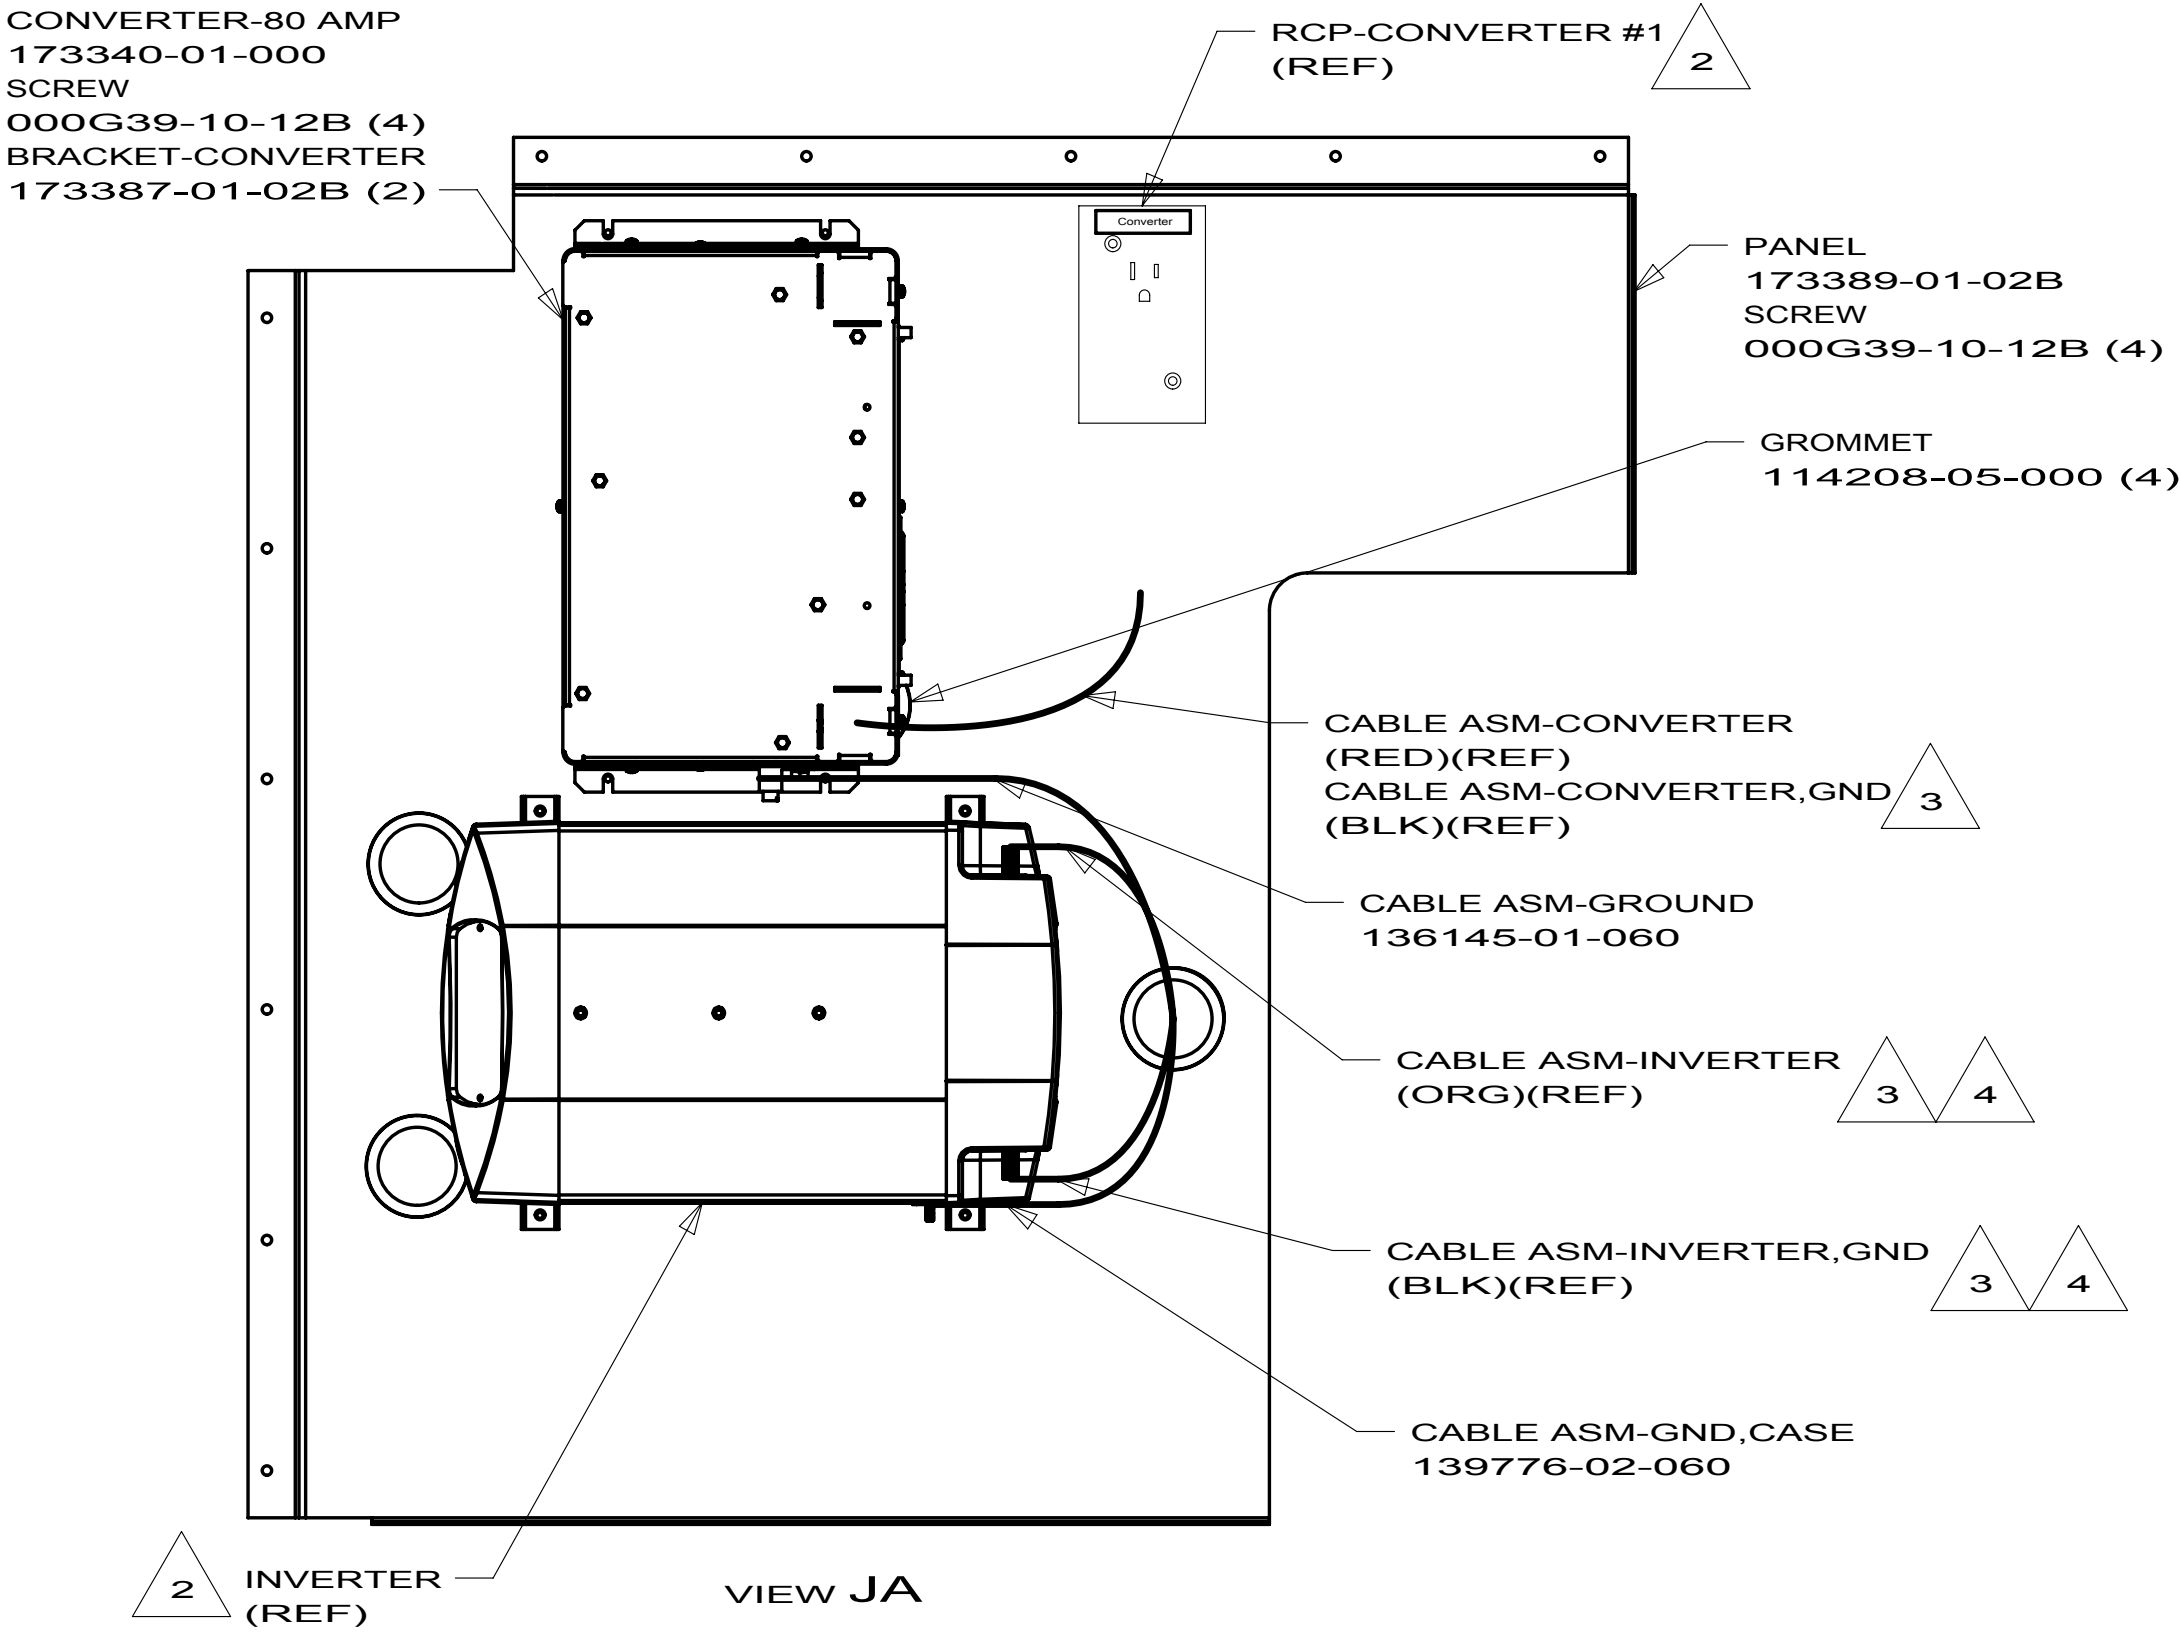

- 4 USE BATTERY CABLE BOOTS SUPPLIED WITH INVERTER.
- 3 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 2 SEE WIRING INSTL-BODY, 110V FOR ADDITIONAL INFORMATION.
- 1 WRAP BOTH ENDS OF ADAPTOR WITH TAPE 8363-01-000 TO SECURE CONNECTION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-BODY, 12V		
SHEET 9	PART NO	REV
	172894	

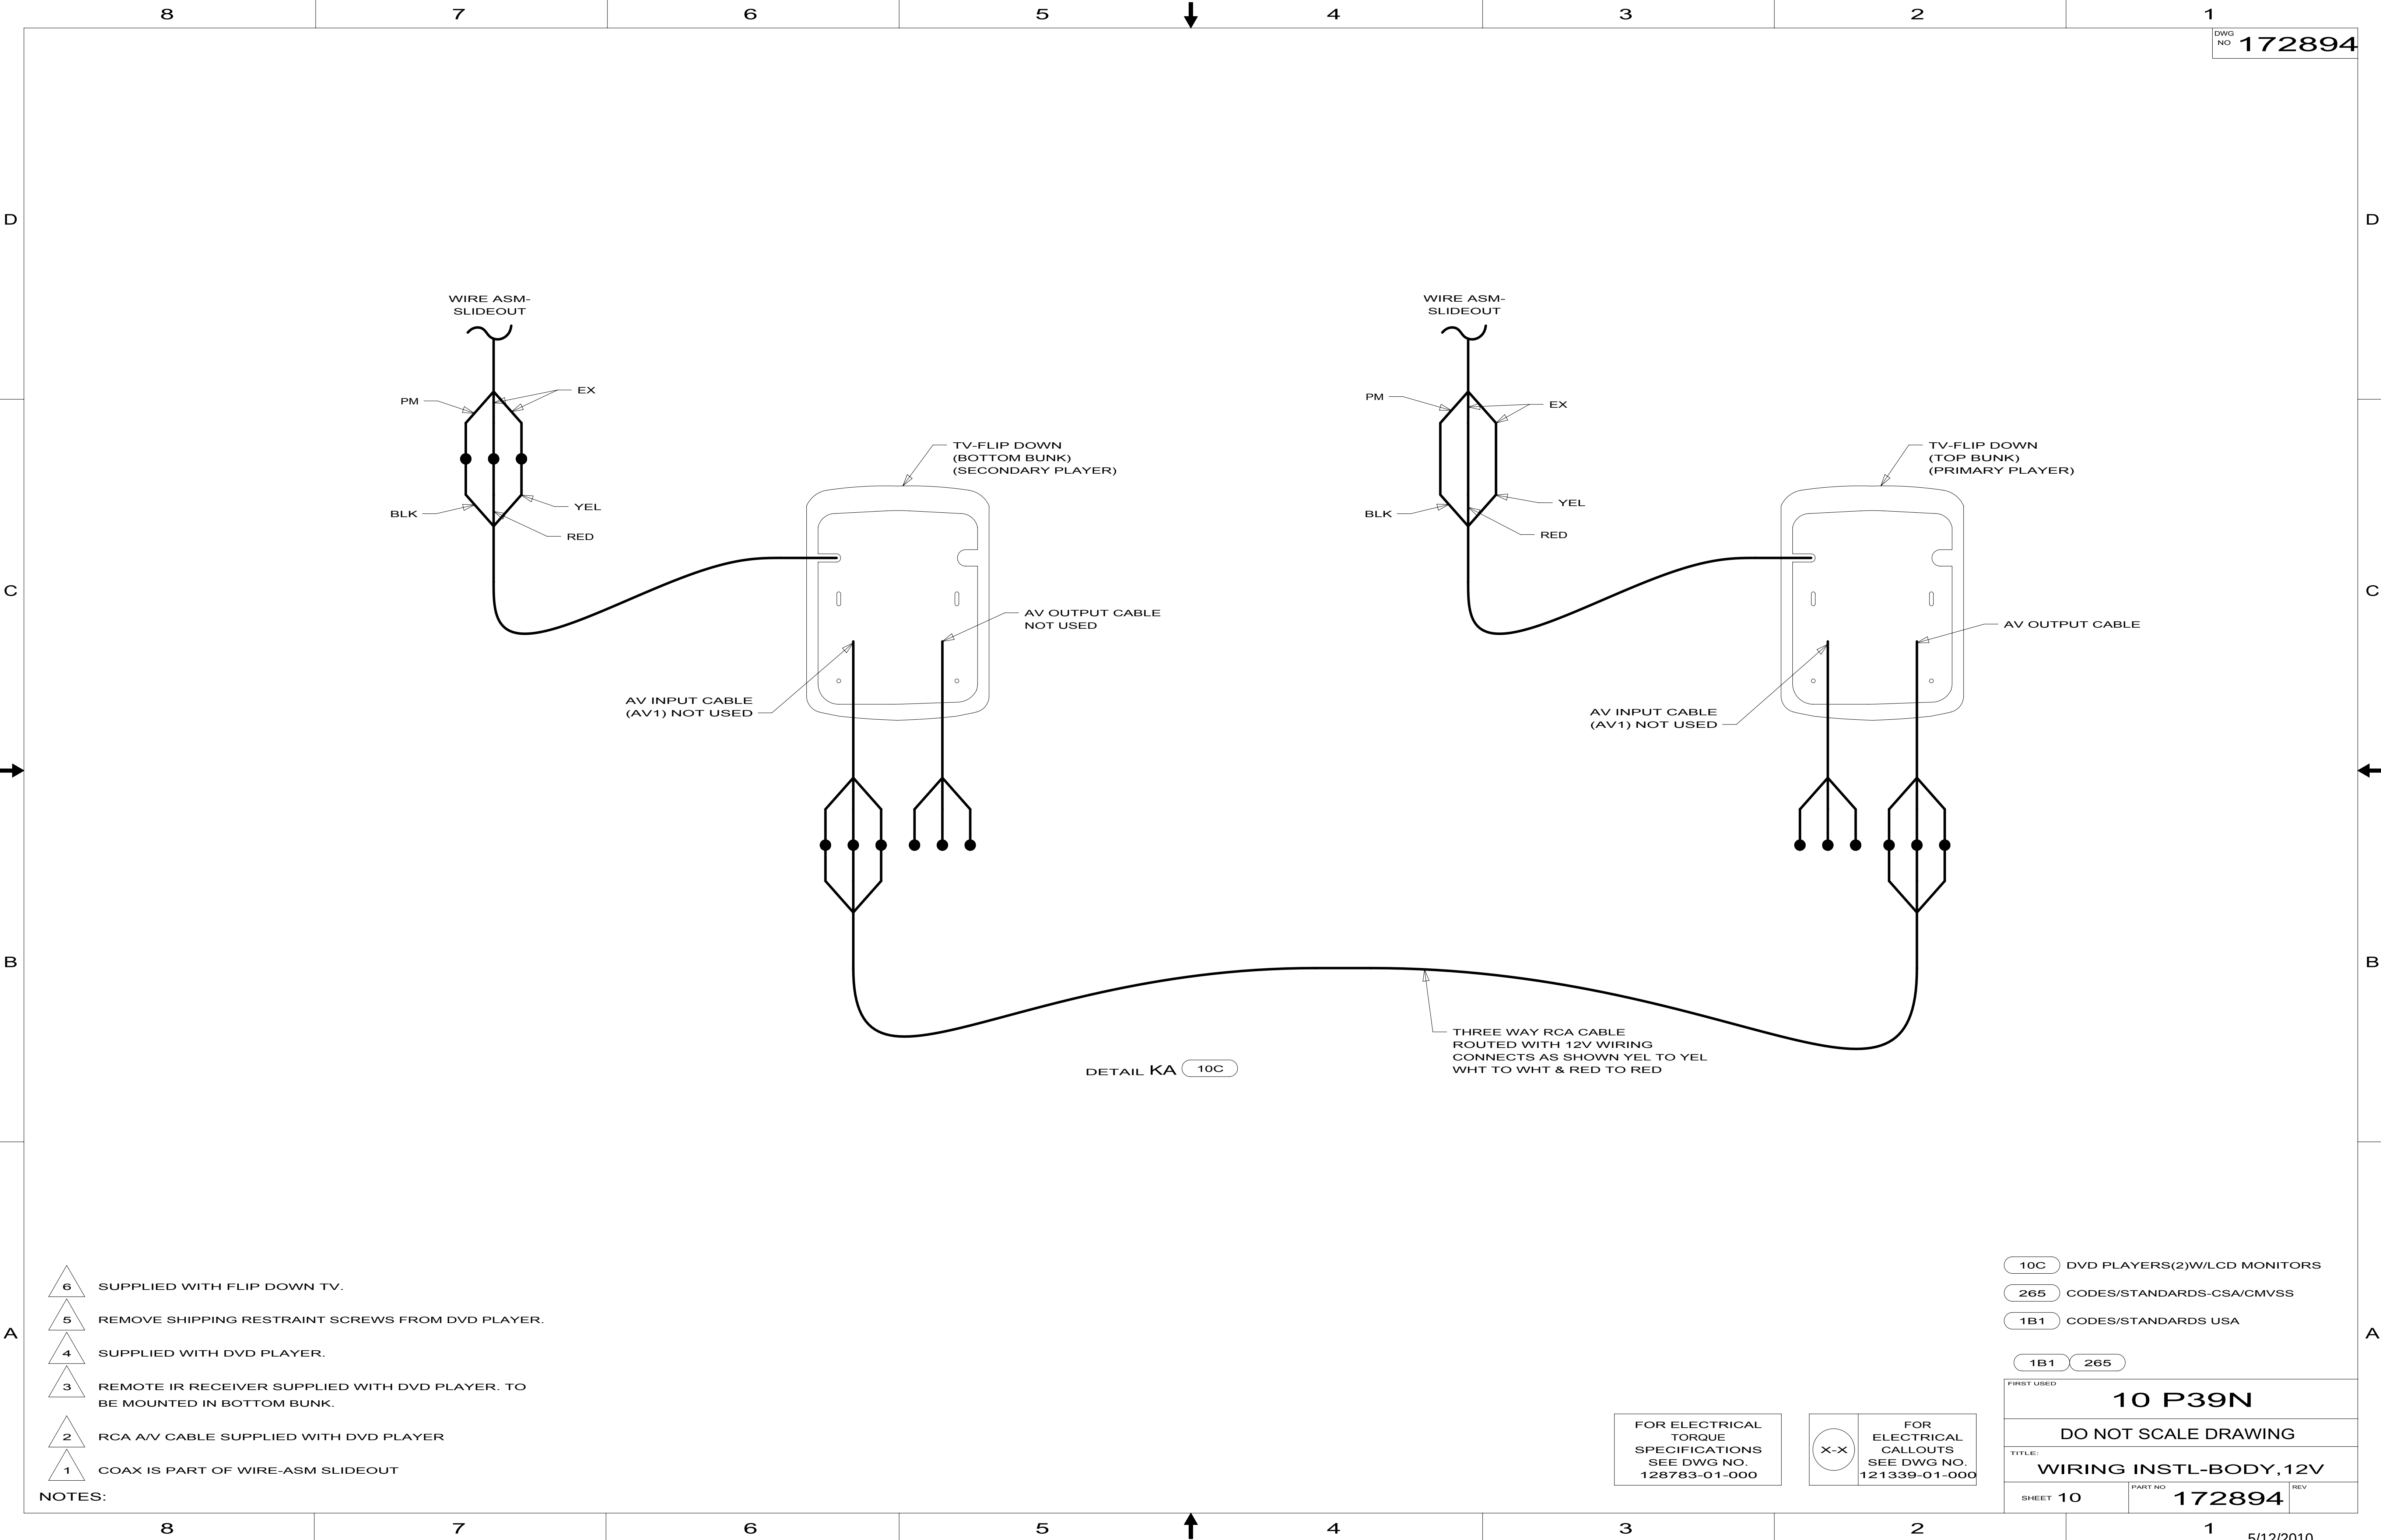

- NOTES:
- 6 SUPPLIED WITH FLIP DOWN TV.
 - 5 REMOVE SHIPPING RESTRAINT SCREWS FROM DVD PLAYER.
 - 4 SUPPLIED WITH DVD PLAYER.
 - 3 REMOTE IR RECEIVER SUPPLIED WITH DVD PLAYER. TO BE MOUNTED IN BOTTOM BUNK.
 - 2 RCA A/V CABLE SUPPLIED WITH DVD PLAYER
 - 1 COAX IS PART OF WIRE-ASM SLIDEOUT

- 10C DVD PLAYERS(2)W/LCD MONITORS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 10	PART NO 172894	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

KEY	PART NUMBER	U/M DESCRIPTION
	093575-46-700	EA GLOBE
	093575-46-701	EA NUT-PLAS. LOCKING

093575-46-01A
VENDOR NO.
 98
 39155

KEY	PART NUMBER	U/M DESCRIPTION
	093575-47-700	EA GLOBE - GLASS


093575-47-01A
VENDOR NO.
 114-GLASS

KEY	PART NUMBER	U/M DESCRIPTION
	093575-52-700	EA SHADE-FABRIC

093575-52-01A
VENDOR NO.
 H3015

KEY	PART NUMBER	U/M	DESCRIPTION	108354-01-01A	VENDOR NO.
	108354-01-700	EA	BULB-COURTESY LIGHT		395-B

134940-08-01A				
KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-04-700	EA	CHASSIS - SILKSCREENED	CE0136-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-702	EA	SWITCH - MOM/OFF/MOM/3 TERM	L0112-00
5	096983-01-703	EA	SWITCH - ON/ON	L0115-00
10	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)	L0775-00
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
12	134940-04-701	EA	BOARD - PC - SOLAR LIGHT	L5121-01
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

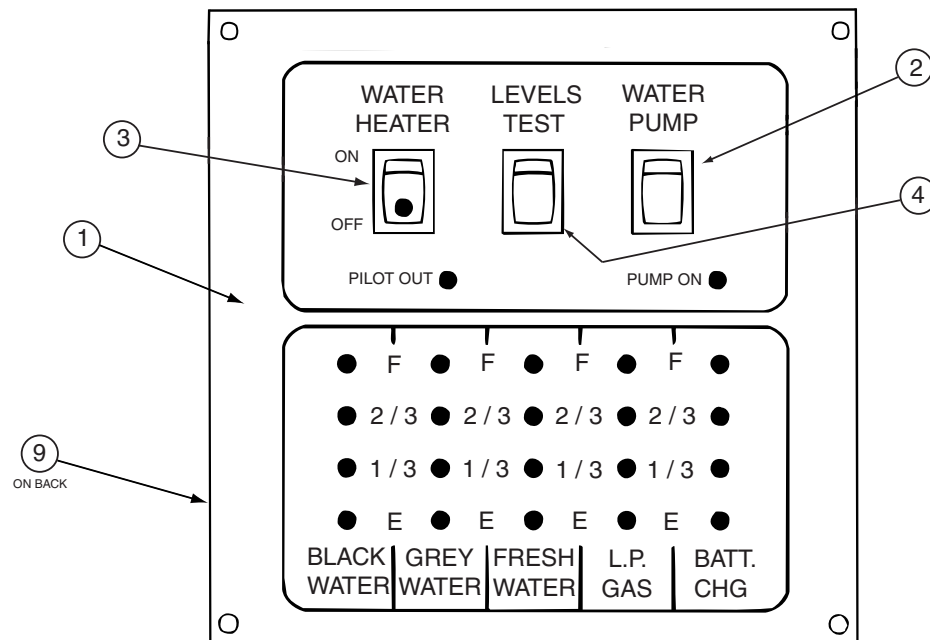

134940-10-01A				
KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-10-700	EA	SILKSCREENED CHASSIS	CE0129-00
2	096983-01-703	EA	SWITCH - ON/ON	L0115-00
3	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
4	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
9	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

KEY	PART NUMBER	U/M	DESCRIPTION	163097-01-000	VENDOR NO.
	163097-01-700	EA	KEY - #2382 (ILLINOIS LOCK)		2382
	163097-01-701	EA	KEY - #2341 (MILLER DIAL)		PART SALES

163598-01-01A			
KEY	PART NUMBER	U/M	DESCRIPTION
	154474-04-706	EA	LNB DUAL EAGLE ASPEN N/C
	163598-01-700	EA	BOARD CIRCUIT N/C
	163598-01-701	EA	STUFFED PCB,CWIM DVB N/C
VENDOR NO.			
			1863-1
			1990-RF-LP KIT
			438

163598-01-02A			
KEY	PART NUMBER	U/M	DESCRIPTION
	154474-04-702	EA	DOME ONLY-REPLACEMENT-BLACK
	154474-04-706	EA	LNB DUAL EAGLE ASPEN N/C
	163598-01-700	EA	BOARD CIRCUIT N/C
	163598-01-701	EA	STUFFED PCB,CWIM DVB N/C
VENDOR NO.			
			1850-B-LP-FS
			1863-1
			1990-RF-LP KIT
			438


			164136-01-000
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	164136-01-700	EA HEADPHONE	OHD88204
	164136-01-701	EA REMOTE - FLIPDOWN TV	OHD800B

KEY	PART NUMBER	U/M	DESCRIPTION
	165170-01-700	EA	LENS

165170-01-01A
VENDOR NO.
81230-LENS

KEY	PART NUMBER	U/M	DESCRIPTION
1	168408-01-700	EA	REMOTE

168408-01-000
VENDOR NO.
PSVCDV2007 SVC PK

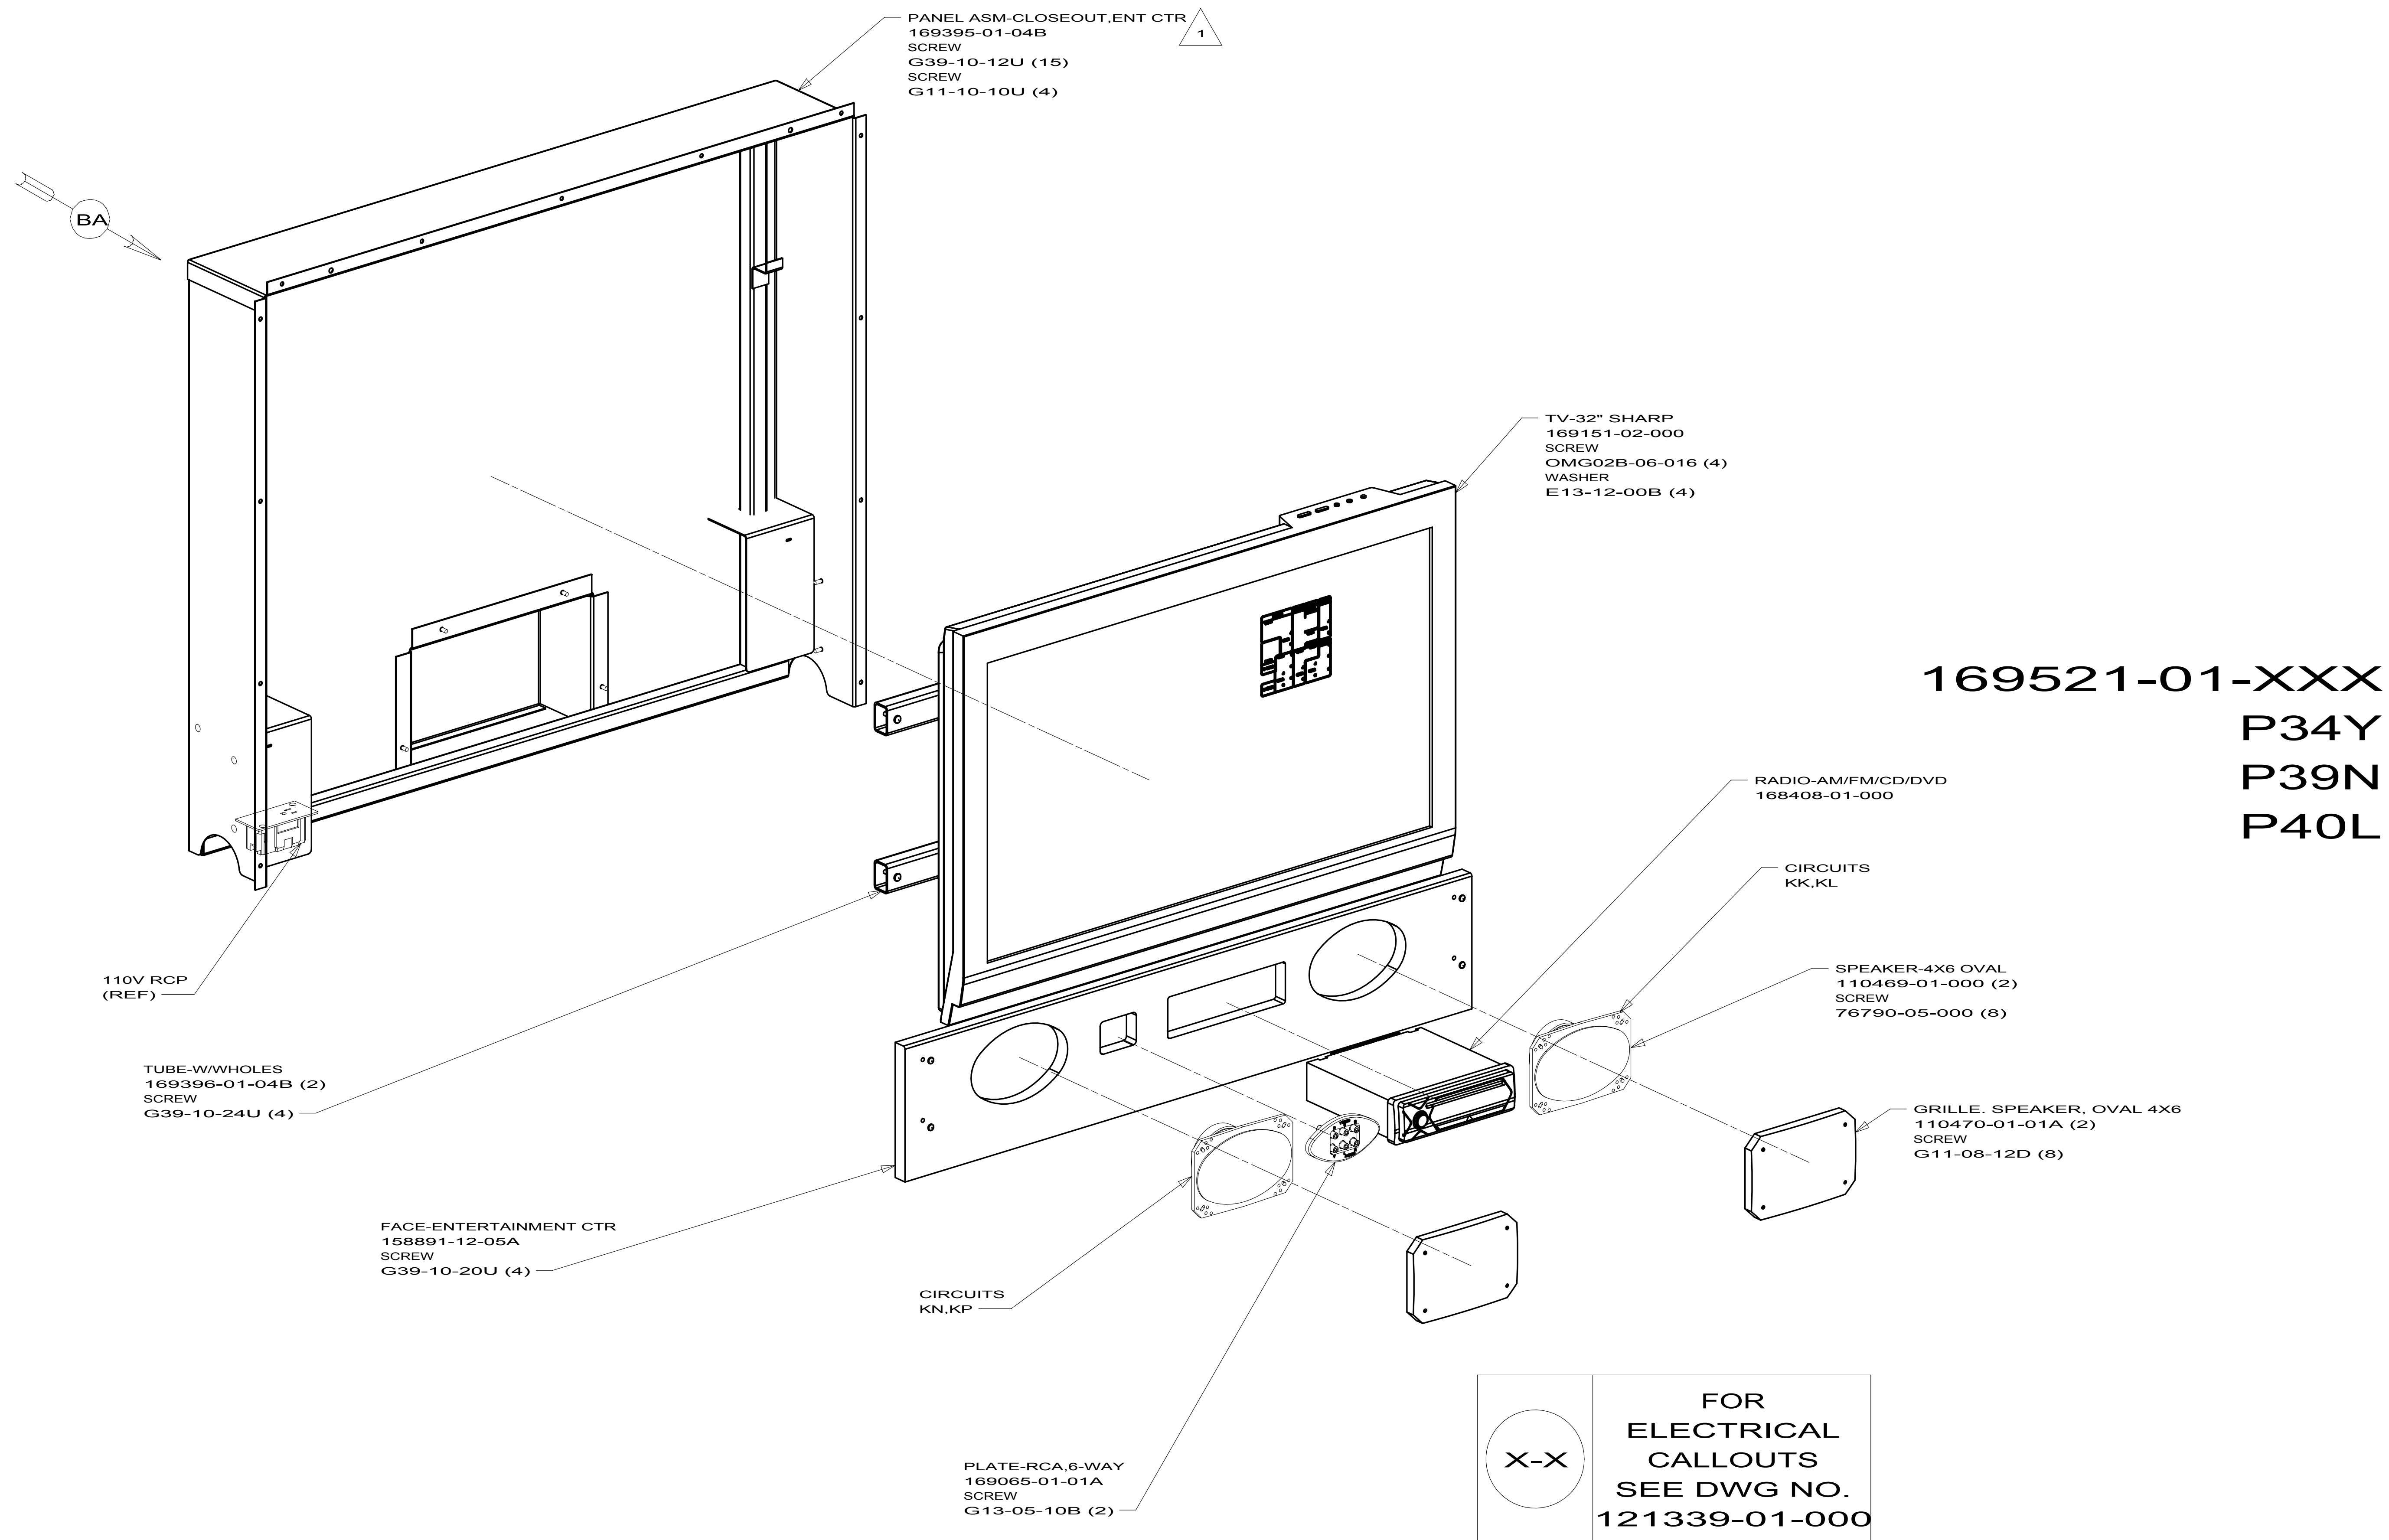


1 INSTALL ON LINE IF IN SIDEWALL, INSTALL IN 803 IF IN SLIDEOUT.

NOTES:

169521

10/28/2009

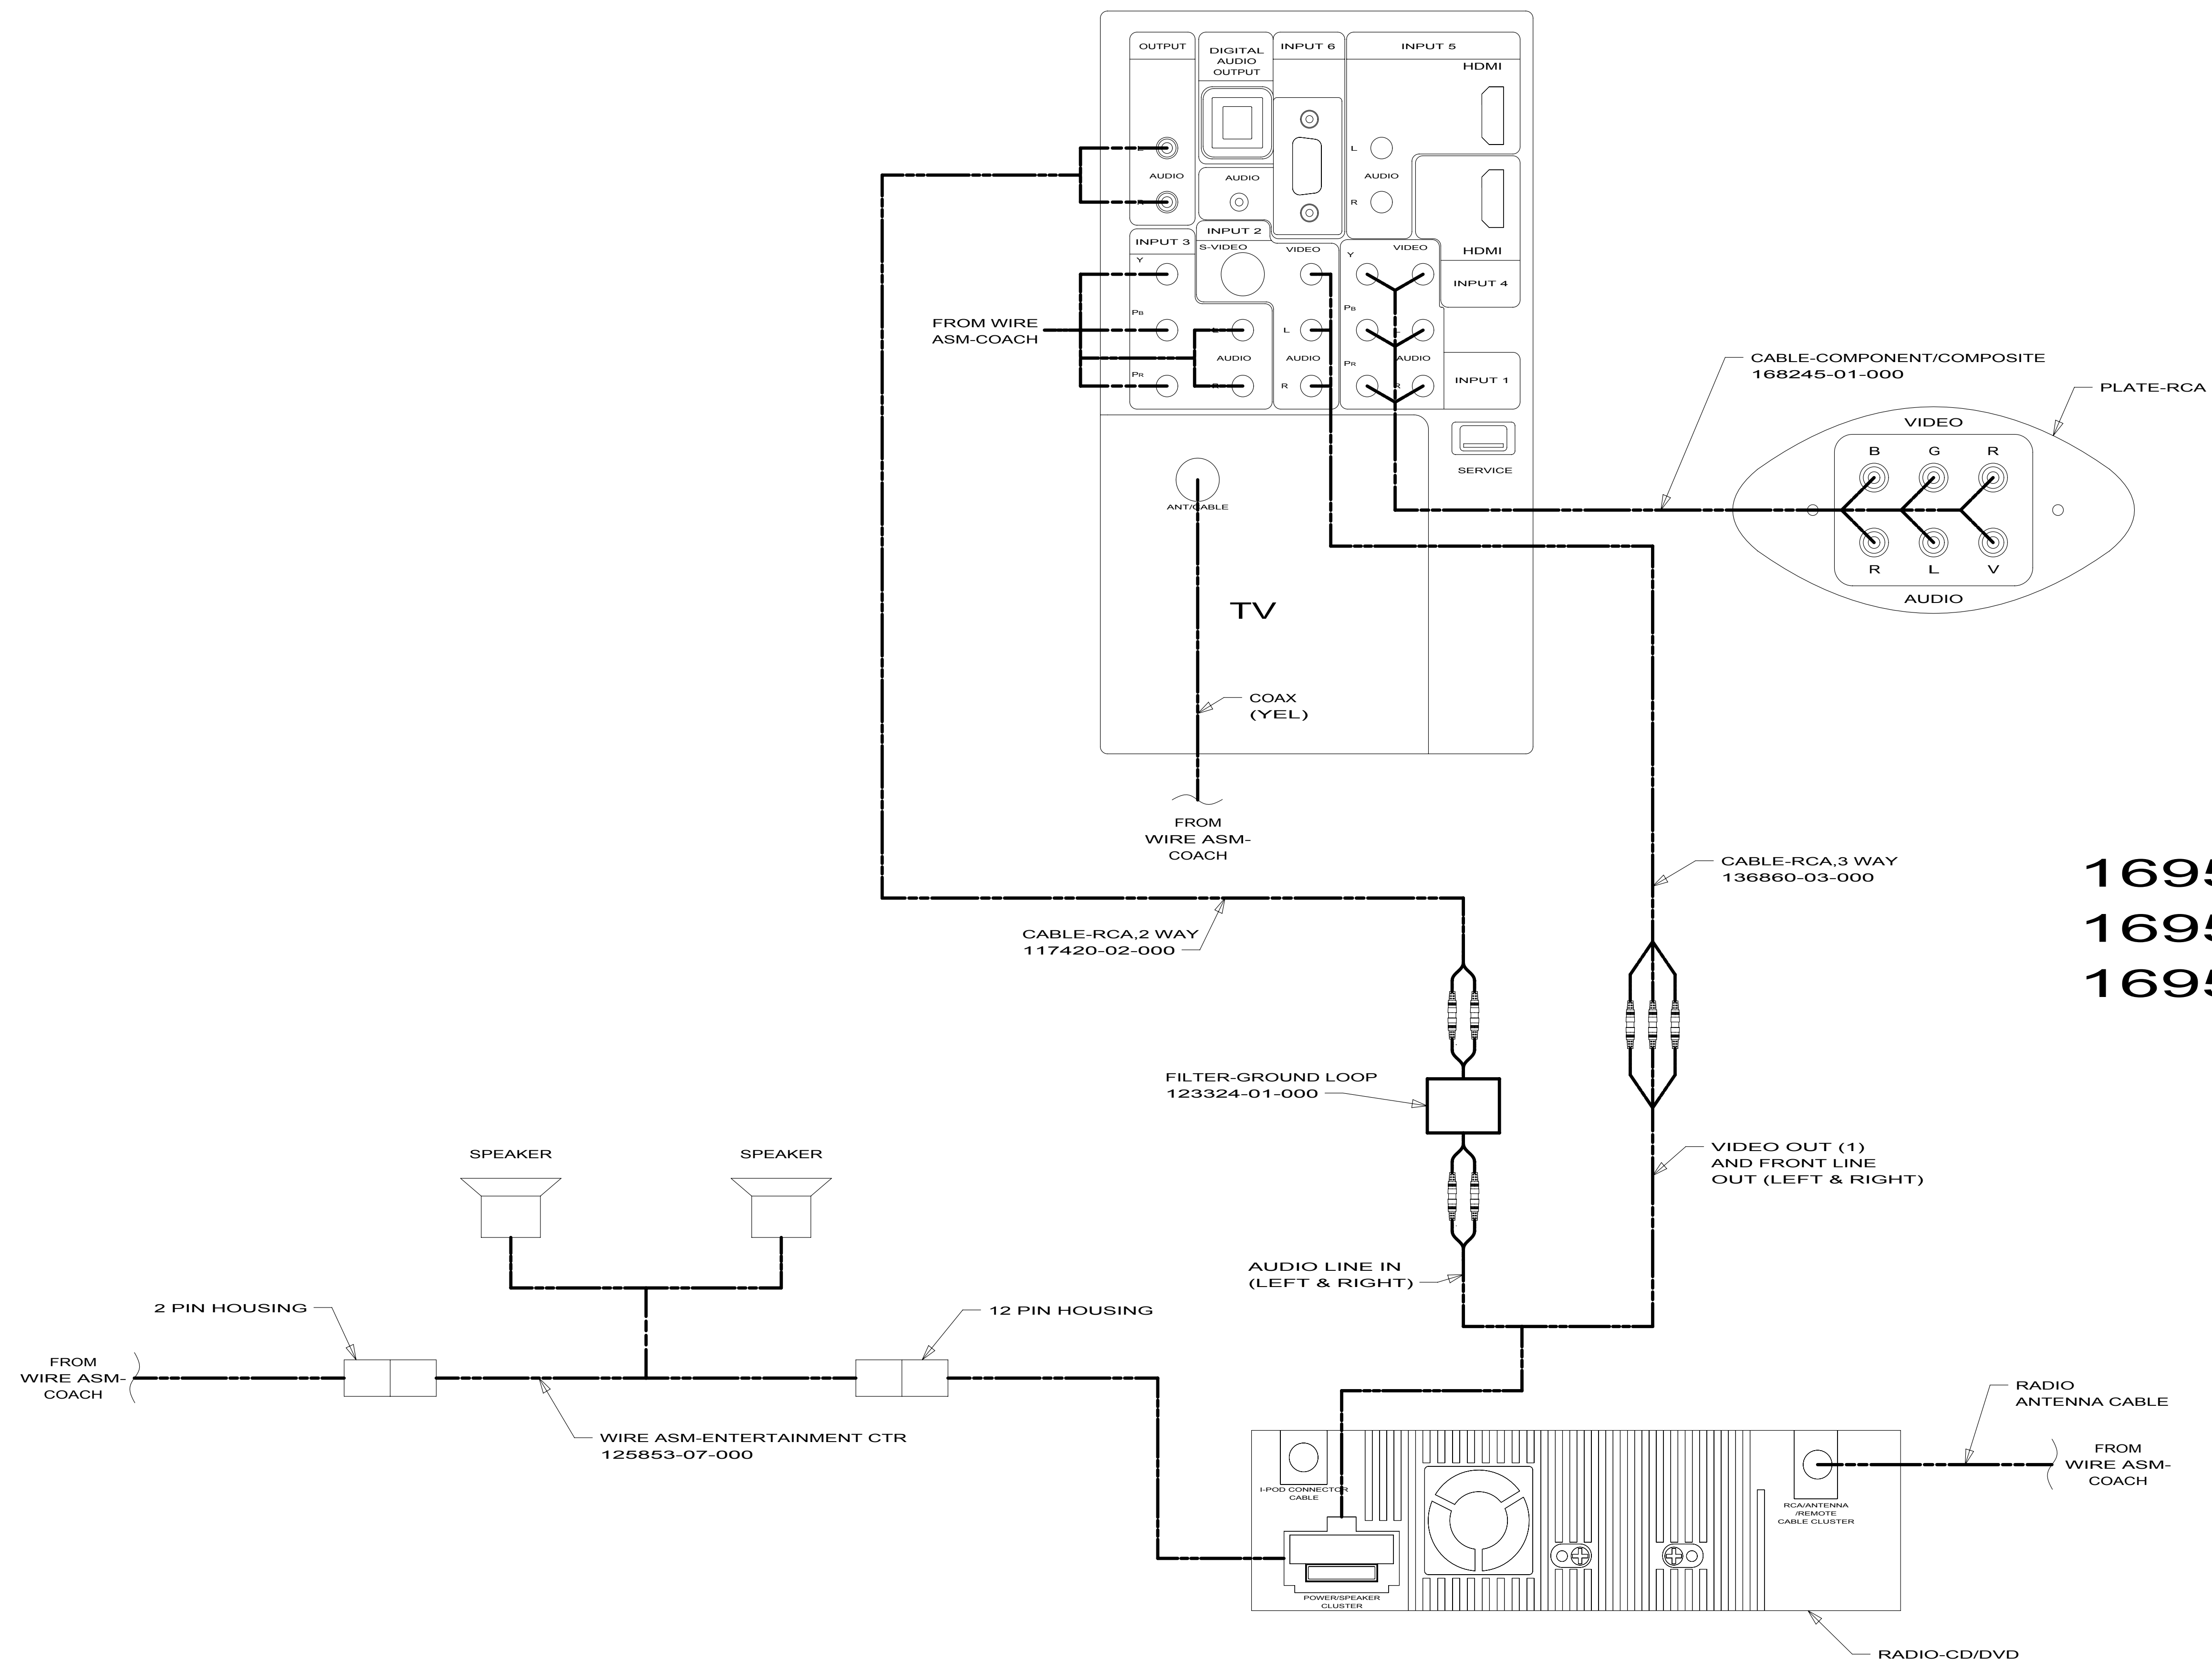

VIEW BA


169521-01-XXX
169521-02-XXX
169521-03-XXX
P-SERIES
R-SERIES

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	169536-01-700	EA	REMOTE - SERVICE PACK	PSVCAWM970

173821-05
P34Y
P39N
P40L(AFTER 03-29-10)

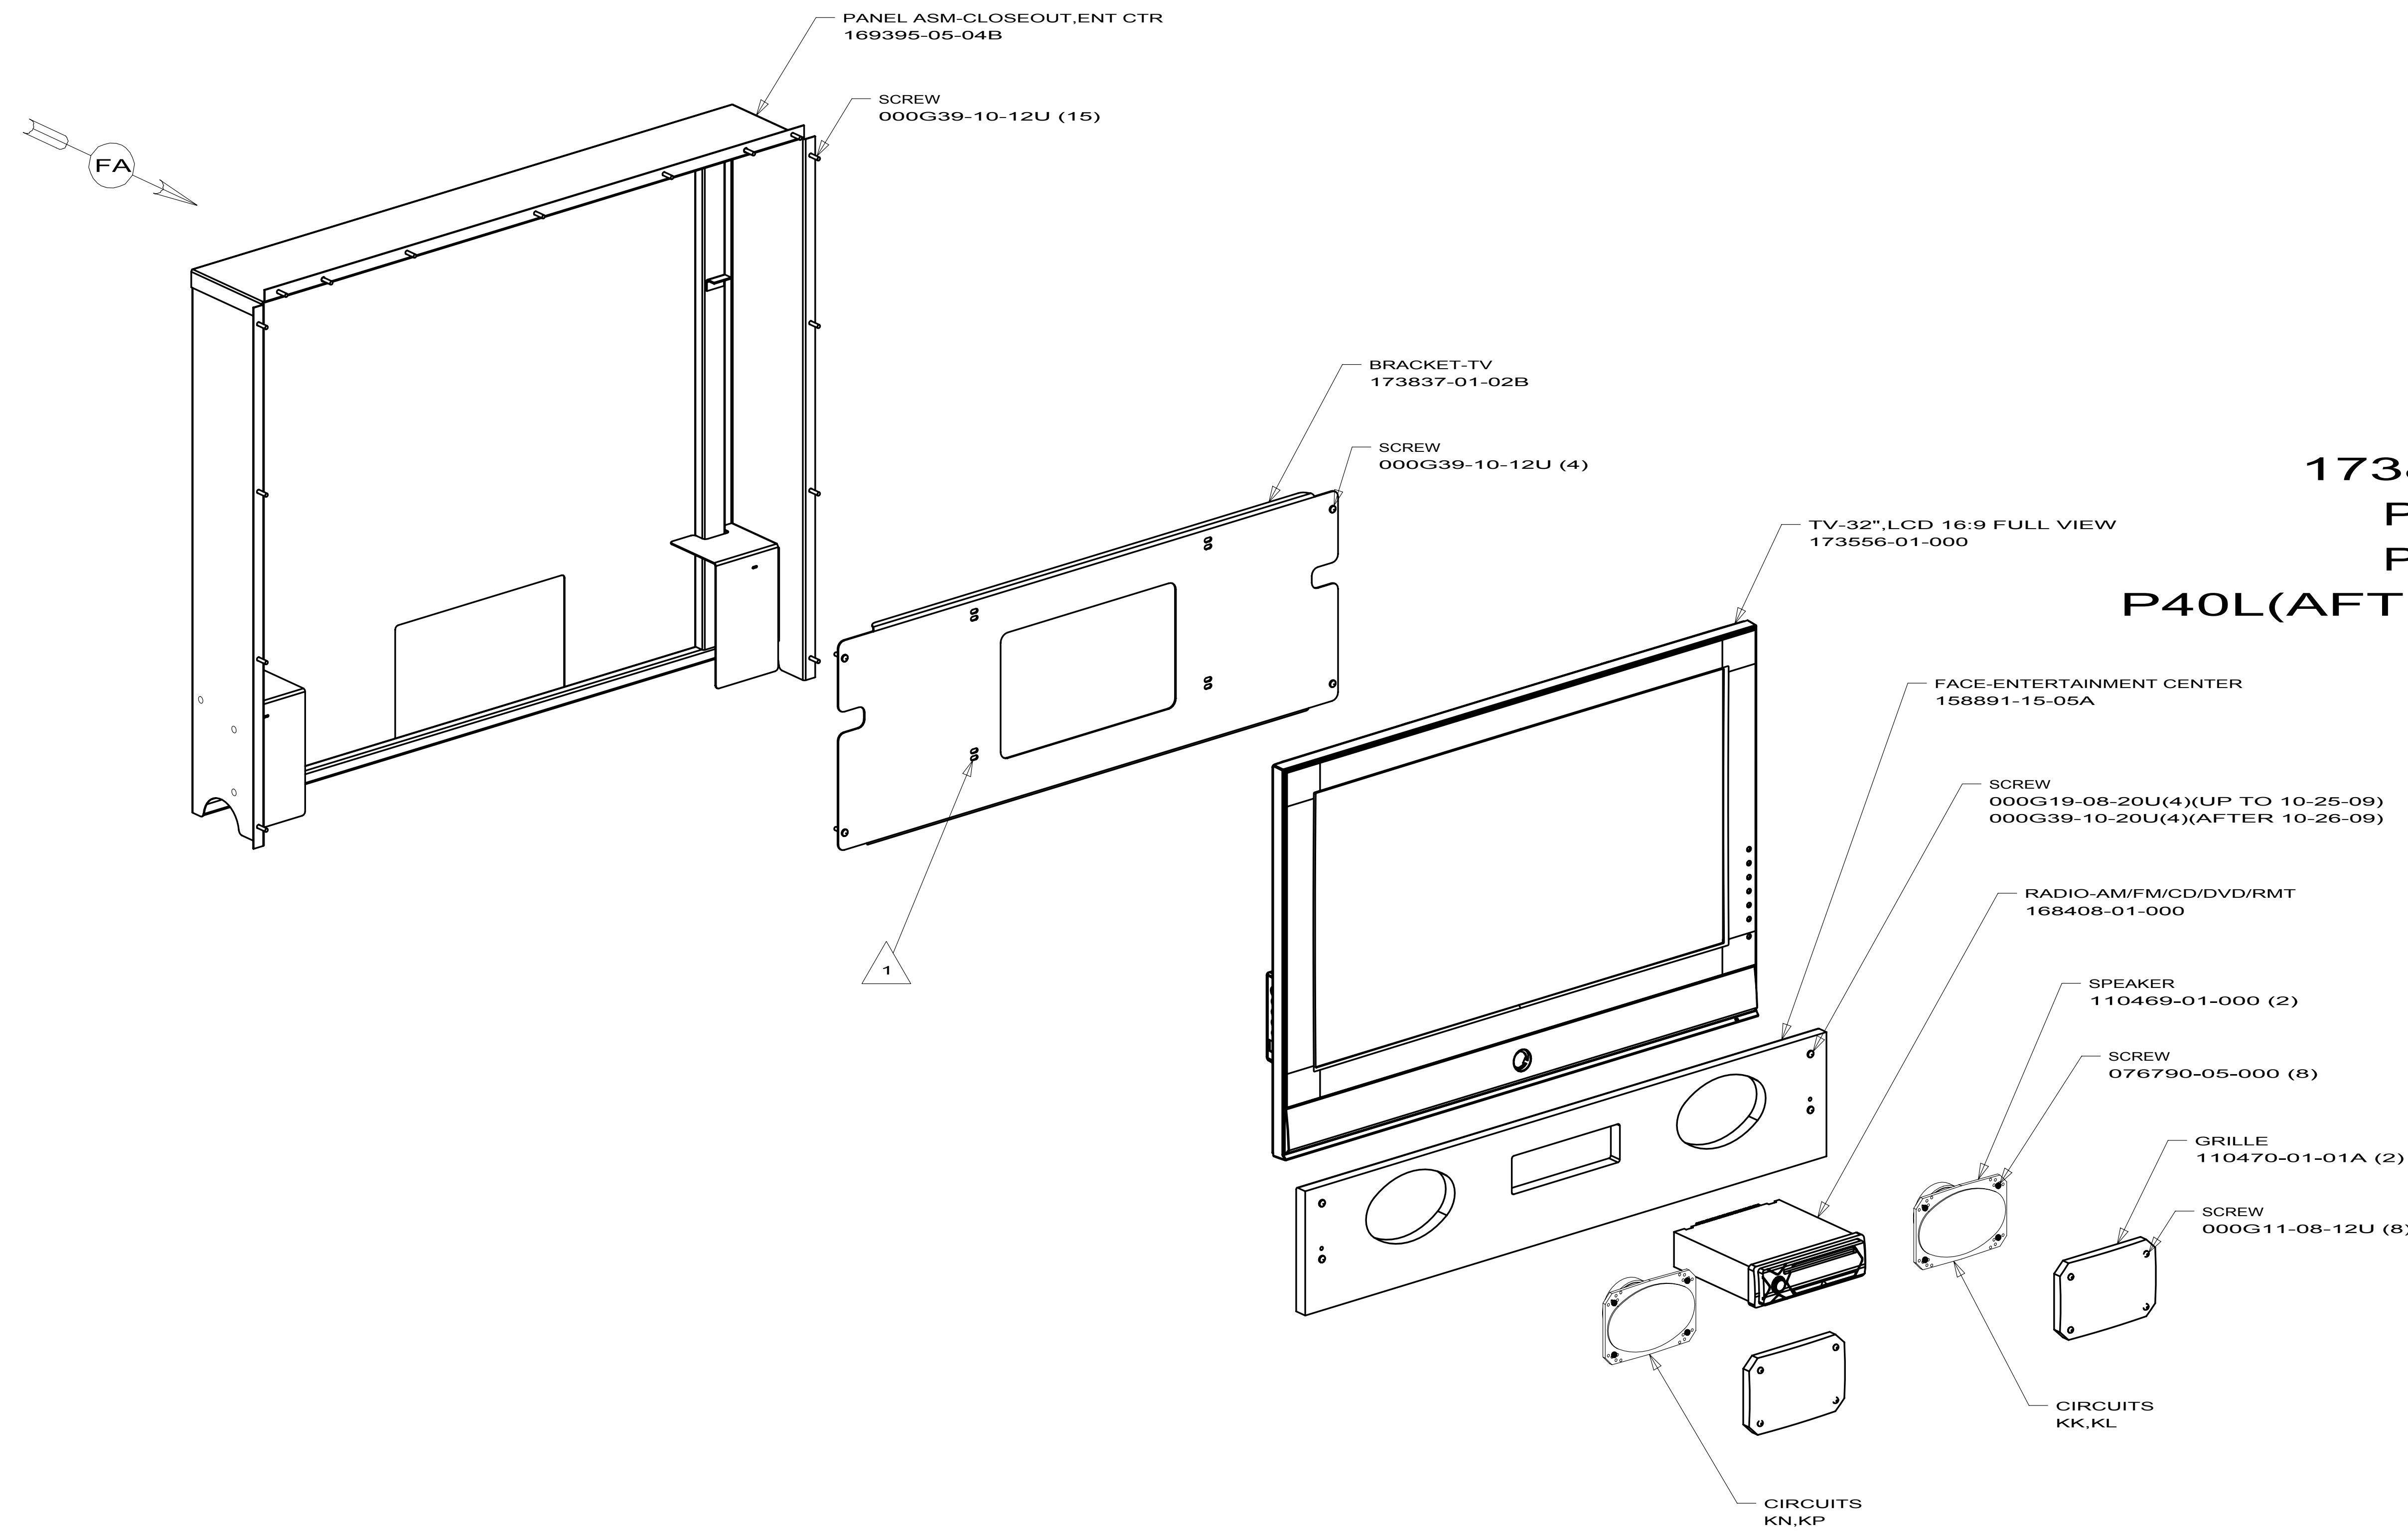





1 SCREWS SUPPLIED WITH TV. USE UPPER SET OF HOLES.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
ENTERTAINMENT CTR COMPL-TV		
SHEET	7	PART NO
		173821
		REV

P-Series
R-Series
169848-06

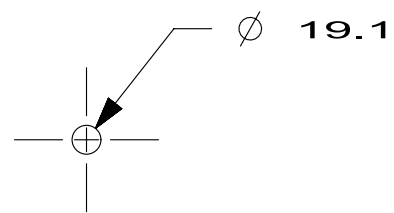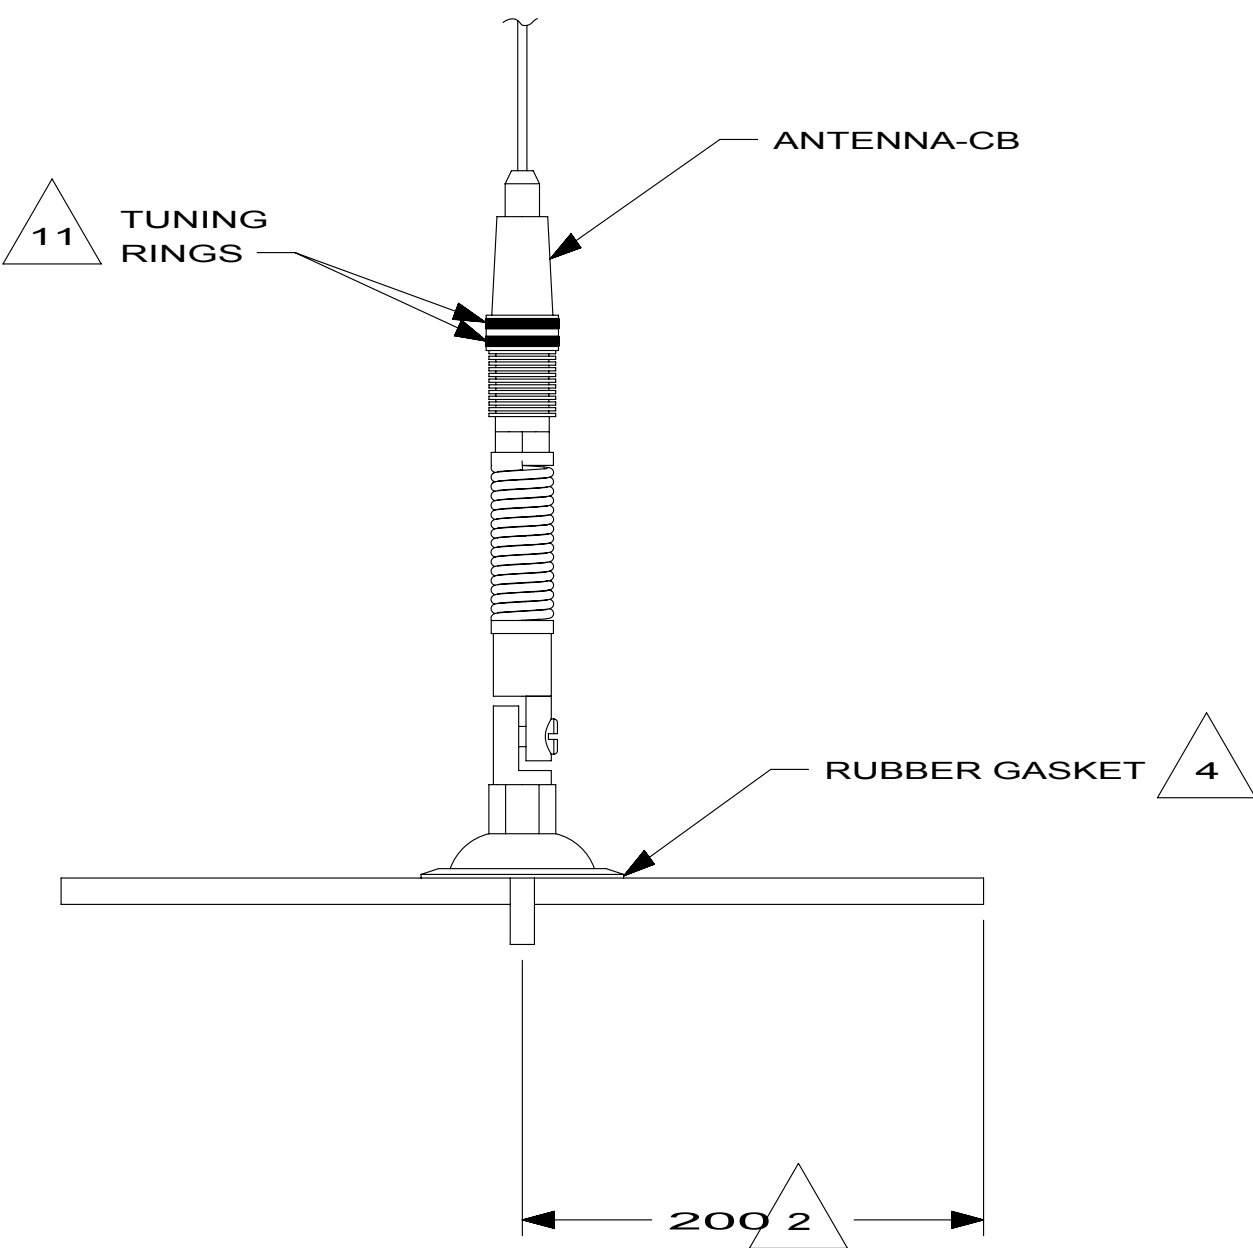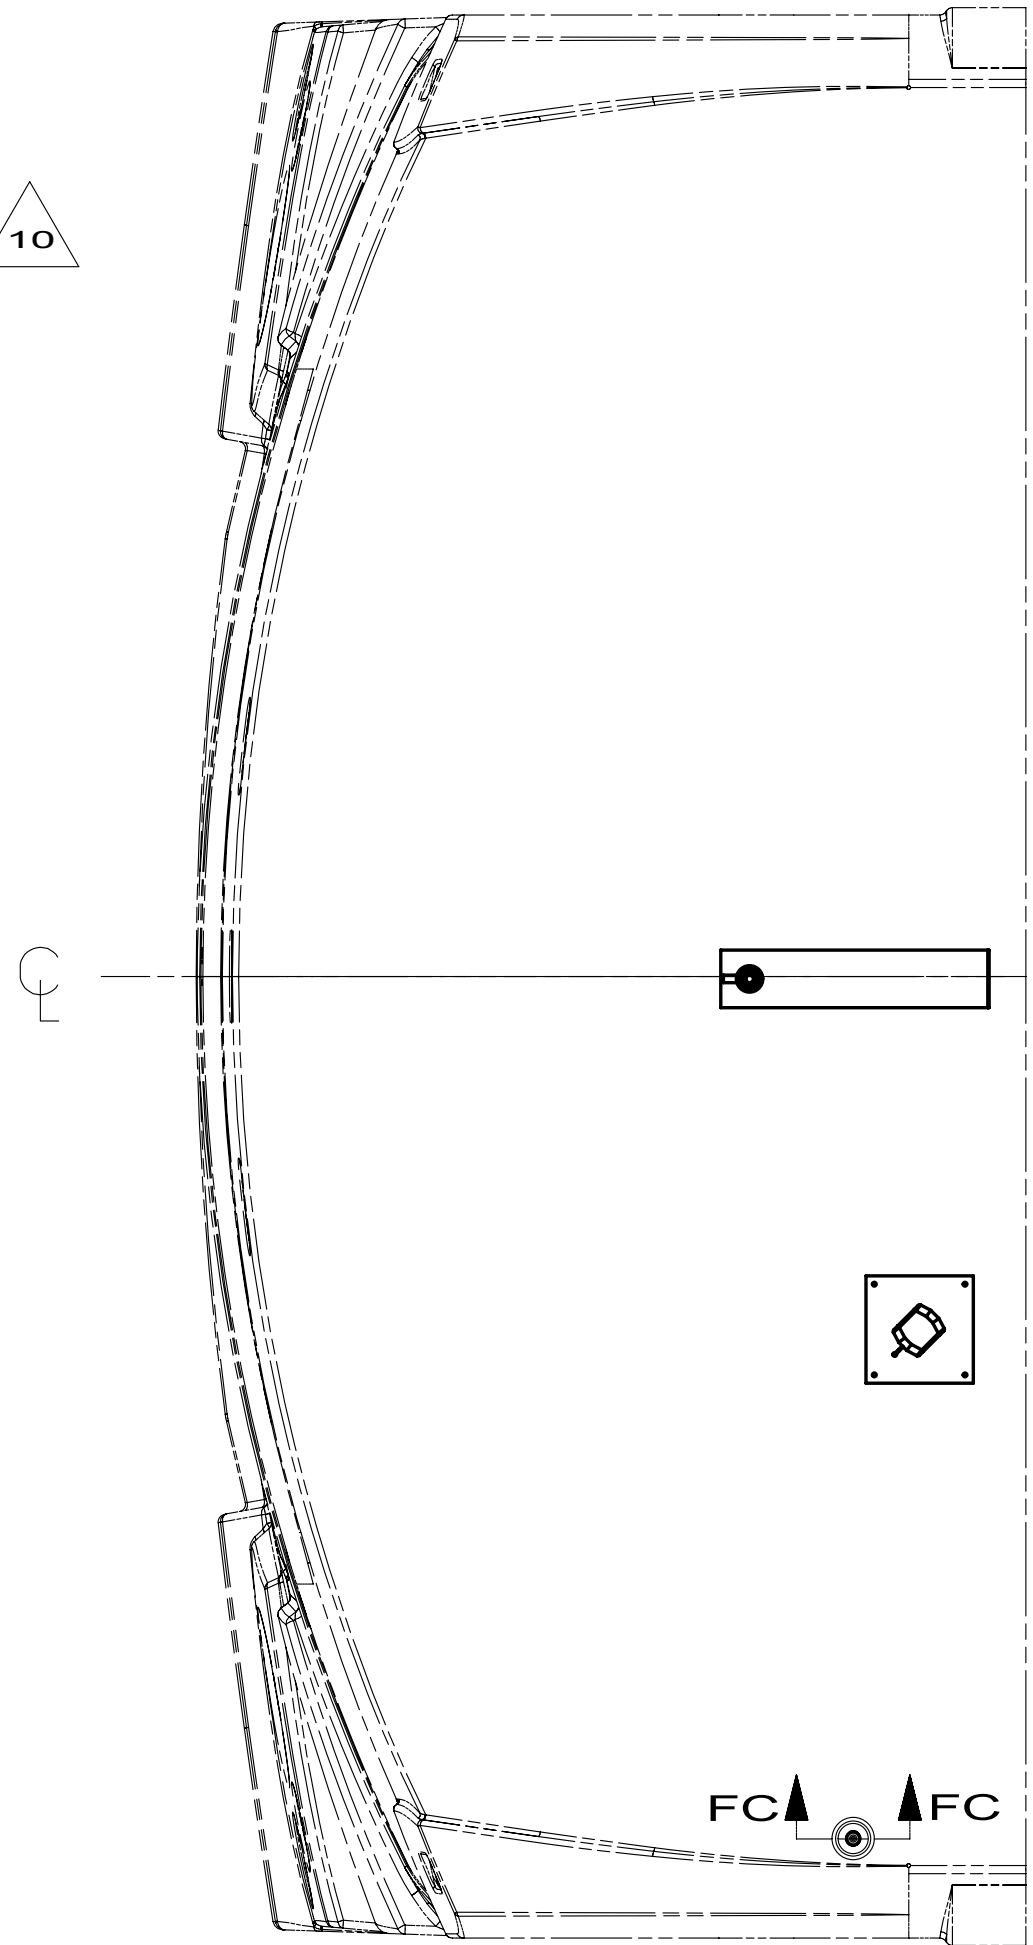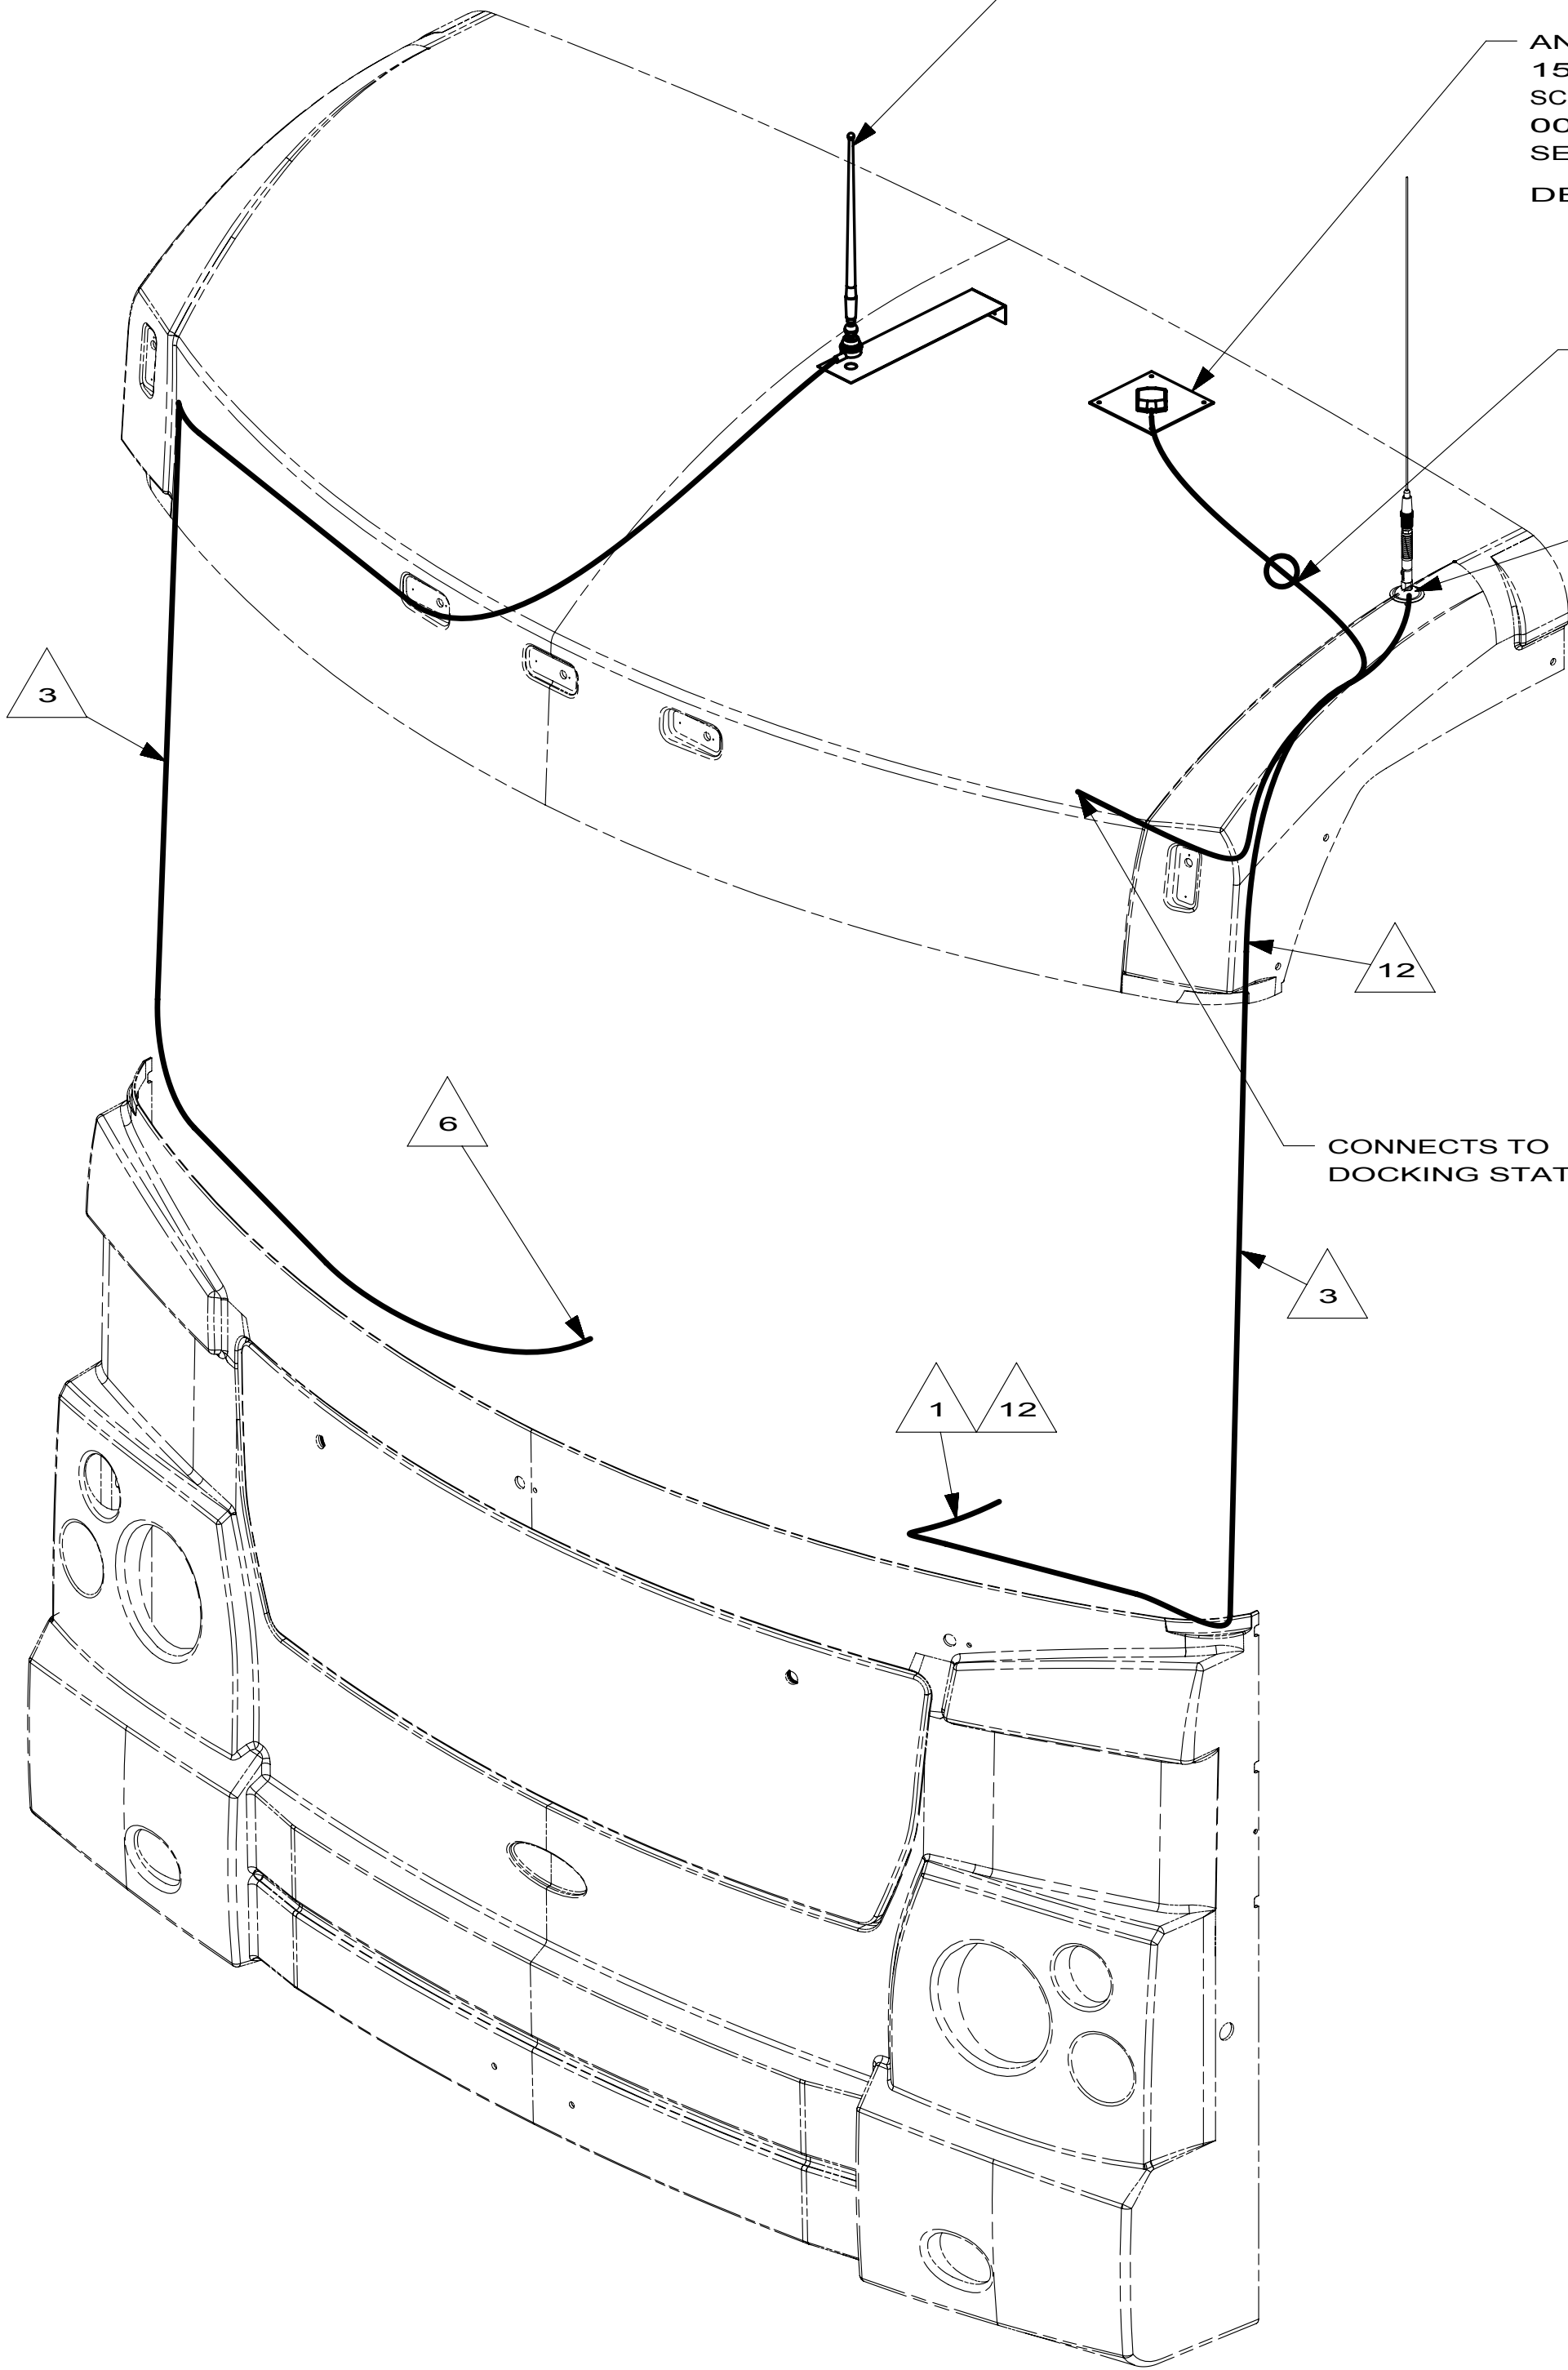

REAR EDGE
OF ROOF CAP

DETAIL FA 70C

- 12 PROVIDE A 1000 MM DROP OF CB ANTENNA CABLE FROM THE TOP OF THE A-PILLAR TO CONNECT TO THE ANTENNA AND PLACE THE EXCESS CABLE IN THE CB PREP BAG LOCATED UNDER THE DASH.
- 11 TUNING RINGS ARE TO BE BOTH ADJUSTED TO THE TOP OF THEIR TRAVEL AND TIGHTENED AGAINST EACH OTHER.
- 10 TIGHTEN JOINTS BETWEEN ANTENNA BASE AND ANTENNA PIVOT AND ALSO THE MAST AND ANTENNA PLATE.
- 9 MOUNT ANTENNA SUCH THAT BASE IS SQUARE W/REAR OF ROOF CAP & HOLE IS DIRECTLY OVER HOLE IN FIBERGLASS. SEAL HOLE IN ROOF CAP, BASE AT SCREWS.
- 8 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 7 USE HOLE IN BRACKET AS GUIDE TO DRILL 13 DIAMETER HOLE IN FIBERGLASS.
- 6 TO RADIO.
- 5 ATTACH ANTENNA-CB GROUND WIRE TO CAB FRAME, USE SCREW 000G39-08-08B.
- 4 SEAL AROUND ANTENNA BASE.
- 3 ROUTE CABLE ALONG A-POST, UNDER TRIM COVER.
- 2 MEASURED FROM REAR EDGE OF FIBERGLASS CAP.
- 1 SEE WIRING INSTL-FRONT END FOR LOCATION OF COAX END AND LABEL.

- 14 USED ON P&R SERIES.
- 13 USED ON M-SERIES.

NOTES:

- ANTENNA-RADIO
090944-02-000
CABLE ASM-ANTENNA
090944-03-000
BRACKET-ANTENNA
140600-06-01B
140600-08-02B
SCREW
000G39-08-08B (2)

- ANTENNA-SATELLITE RADIO
158494-01-000
SCREW
000G11-08-08U (4)
SEAL
DETAIL FA

CONNECT TO CABLE-
ANTENNA SATELLITE

- ANTENNA-CB
123256-01-000
CABLE-CB COAX
123256-02-000

CONNECTS TO
DOCKING STATION


- 70C RADIO - SATELLITE
- 40C RADIO - CB
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ANTENNA INSTL-RADIO AND CB		
SHEET 6	PART NO 169848	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

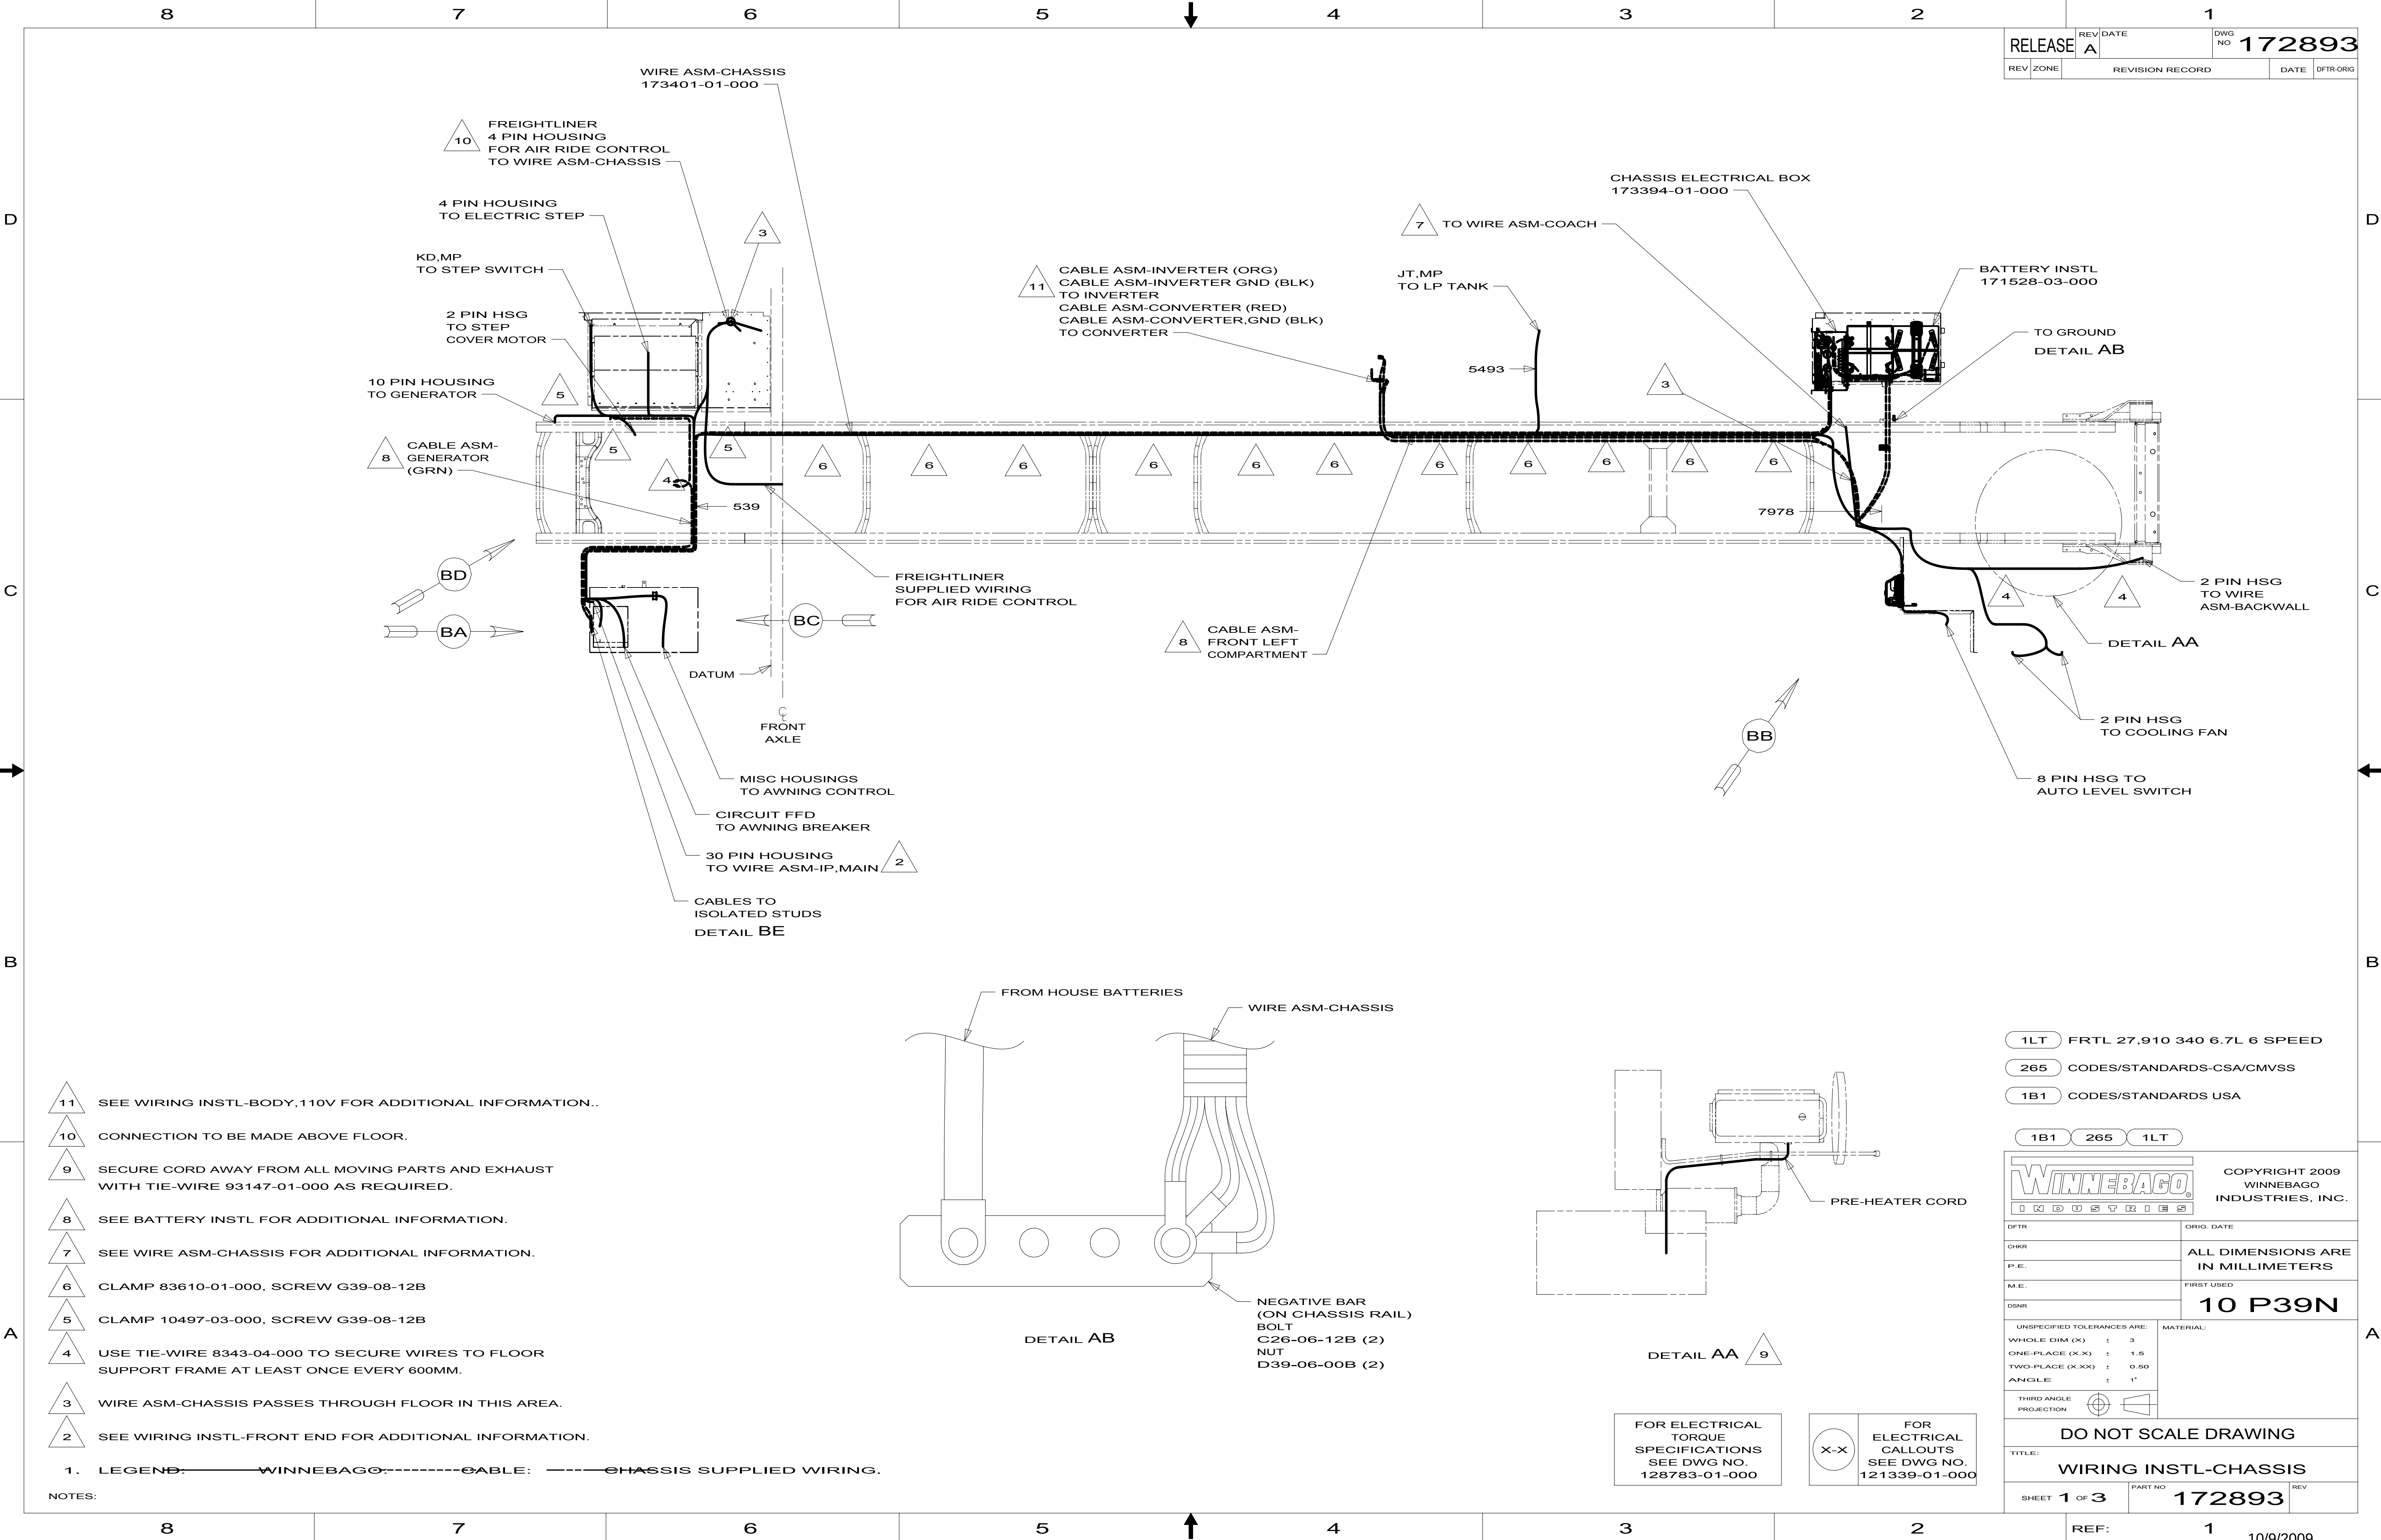

RELEASE		REV DATE	DWG NO	172893
REV	ZONE	REVISION RECORD		DATE DFR-ORIG

- 11

SEE WIRING INSTL-BODY, 110V FOR ADDITIONAL INFORMATION..
- 10

CONNECTION TO BE MADE ABOVE FLOOR.
- 9

SECURE CORD AWAY FROM ALL MOVING PARTS AND EXHAUST WITH TIE-WIRE 93147-01-000 AS REQUIRED.
- 8

SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 7

SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION.
- 6

CLAMP 83610-01-000, SCREW G39-08-12B
- 5

CLAMP 10497-03-000, SCREW G39-08-12B
- 4

USE TIE-WIRE 8343-04-000 TO SECURE WIRES TO FLOOR SUPPORT FRAME AT LEAST ONCE EVERY 600MM.
- 3

WIRE ASM-CHASSIS PASSES THROUGH FLOOR IN THIS AREA.
- 2

SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.

1. LEGEND: — WINNEBAGO; - - - - - CABLE; - - - - - CHASSIS SUPPLIED WIRING.

NOTES:

- 1LT FRTL 27,910 340 6.7L 6 SPEED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B12651LT

WINNEBAGO

INDUSTRIES

COPYRIGHT 2009

WINNEBAGO

INDUSTRIES, INC.

DFTR	ORIG. DATE
CHGR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	
DSNR	
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	


10 P39N

MATERIAL:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

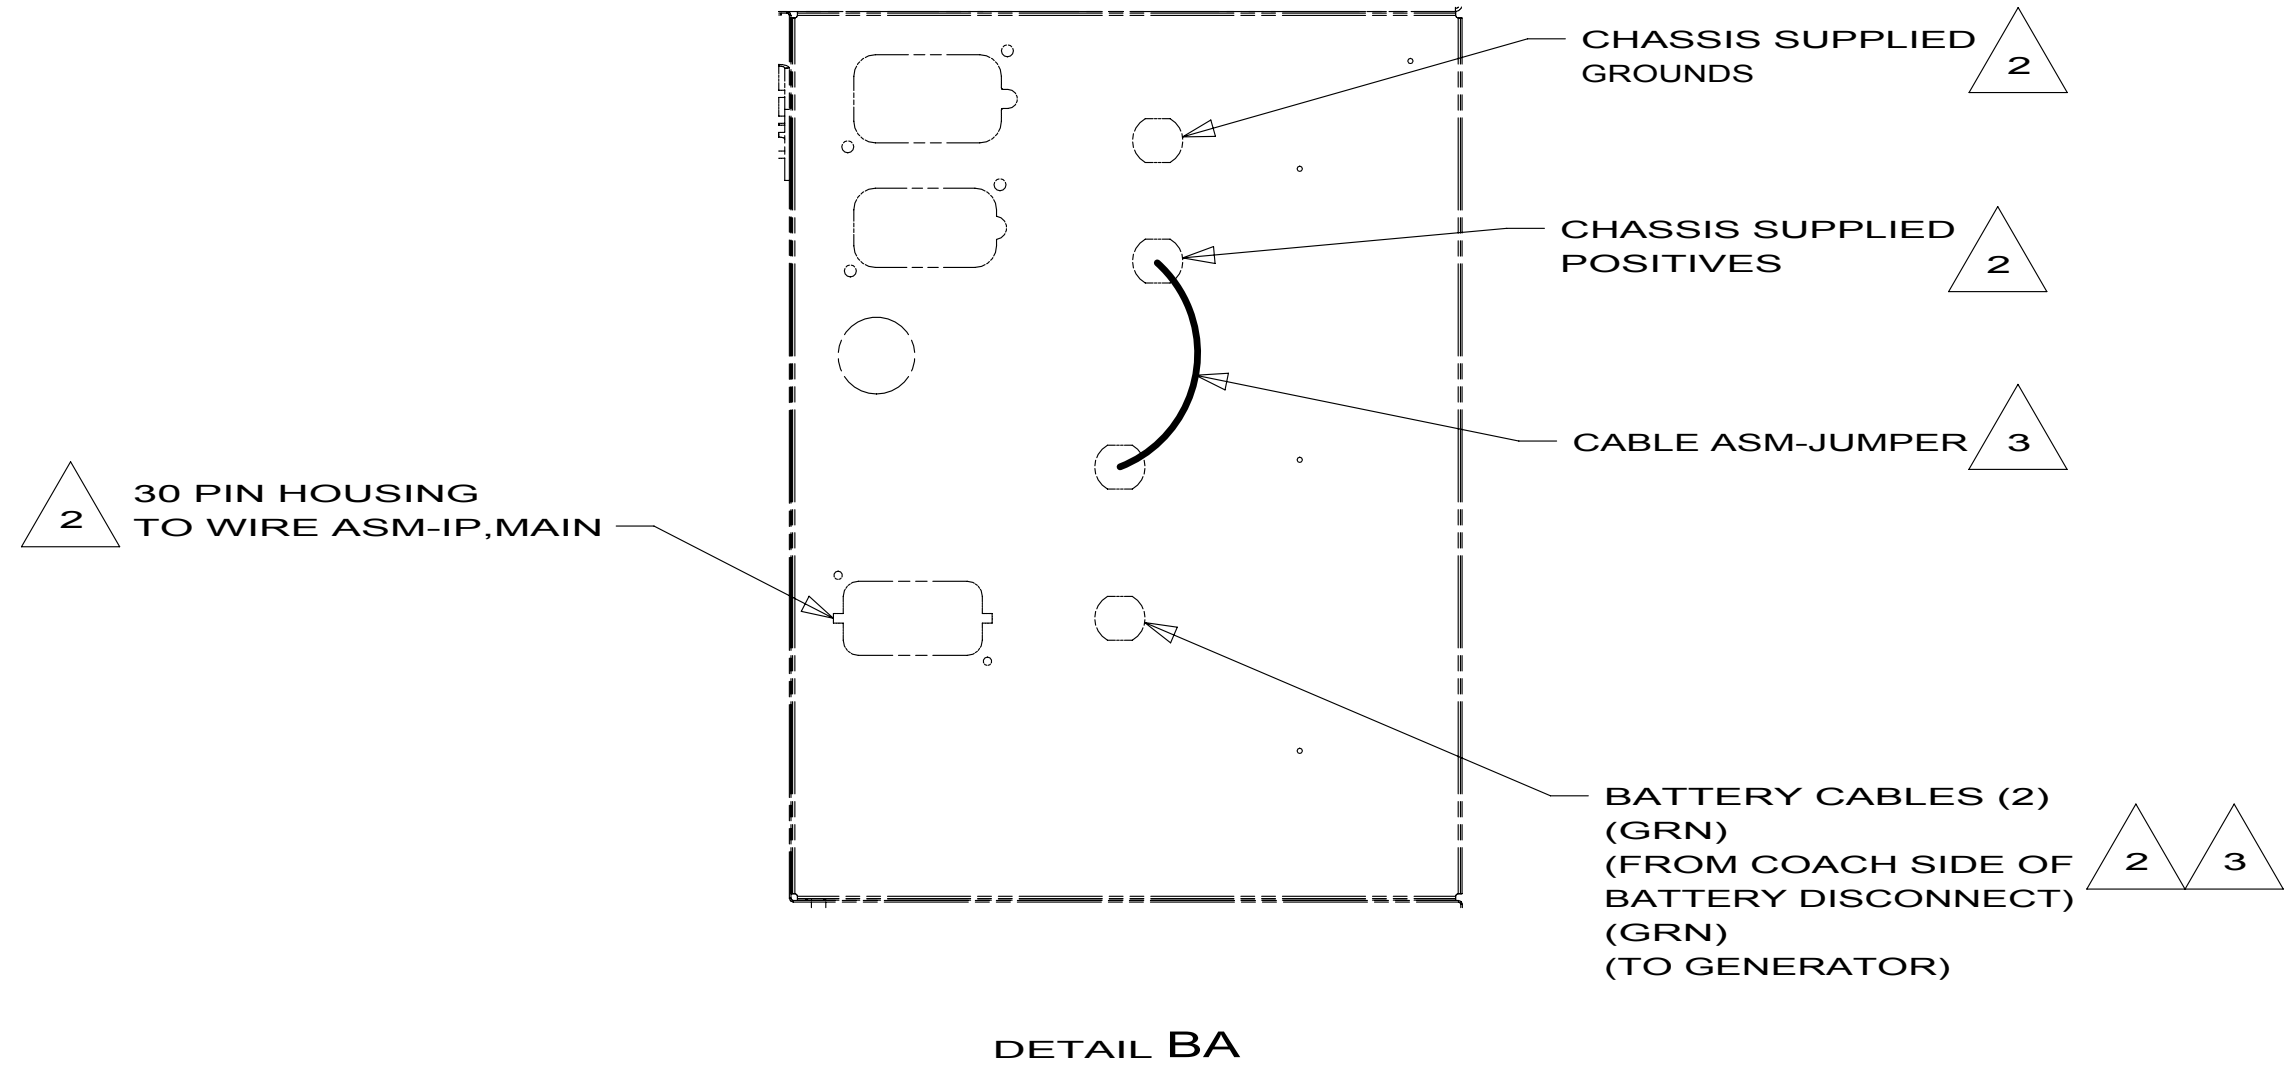


DETAIL BA

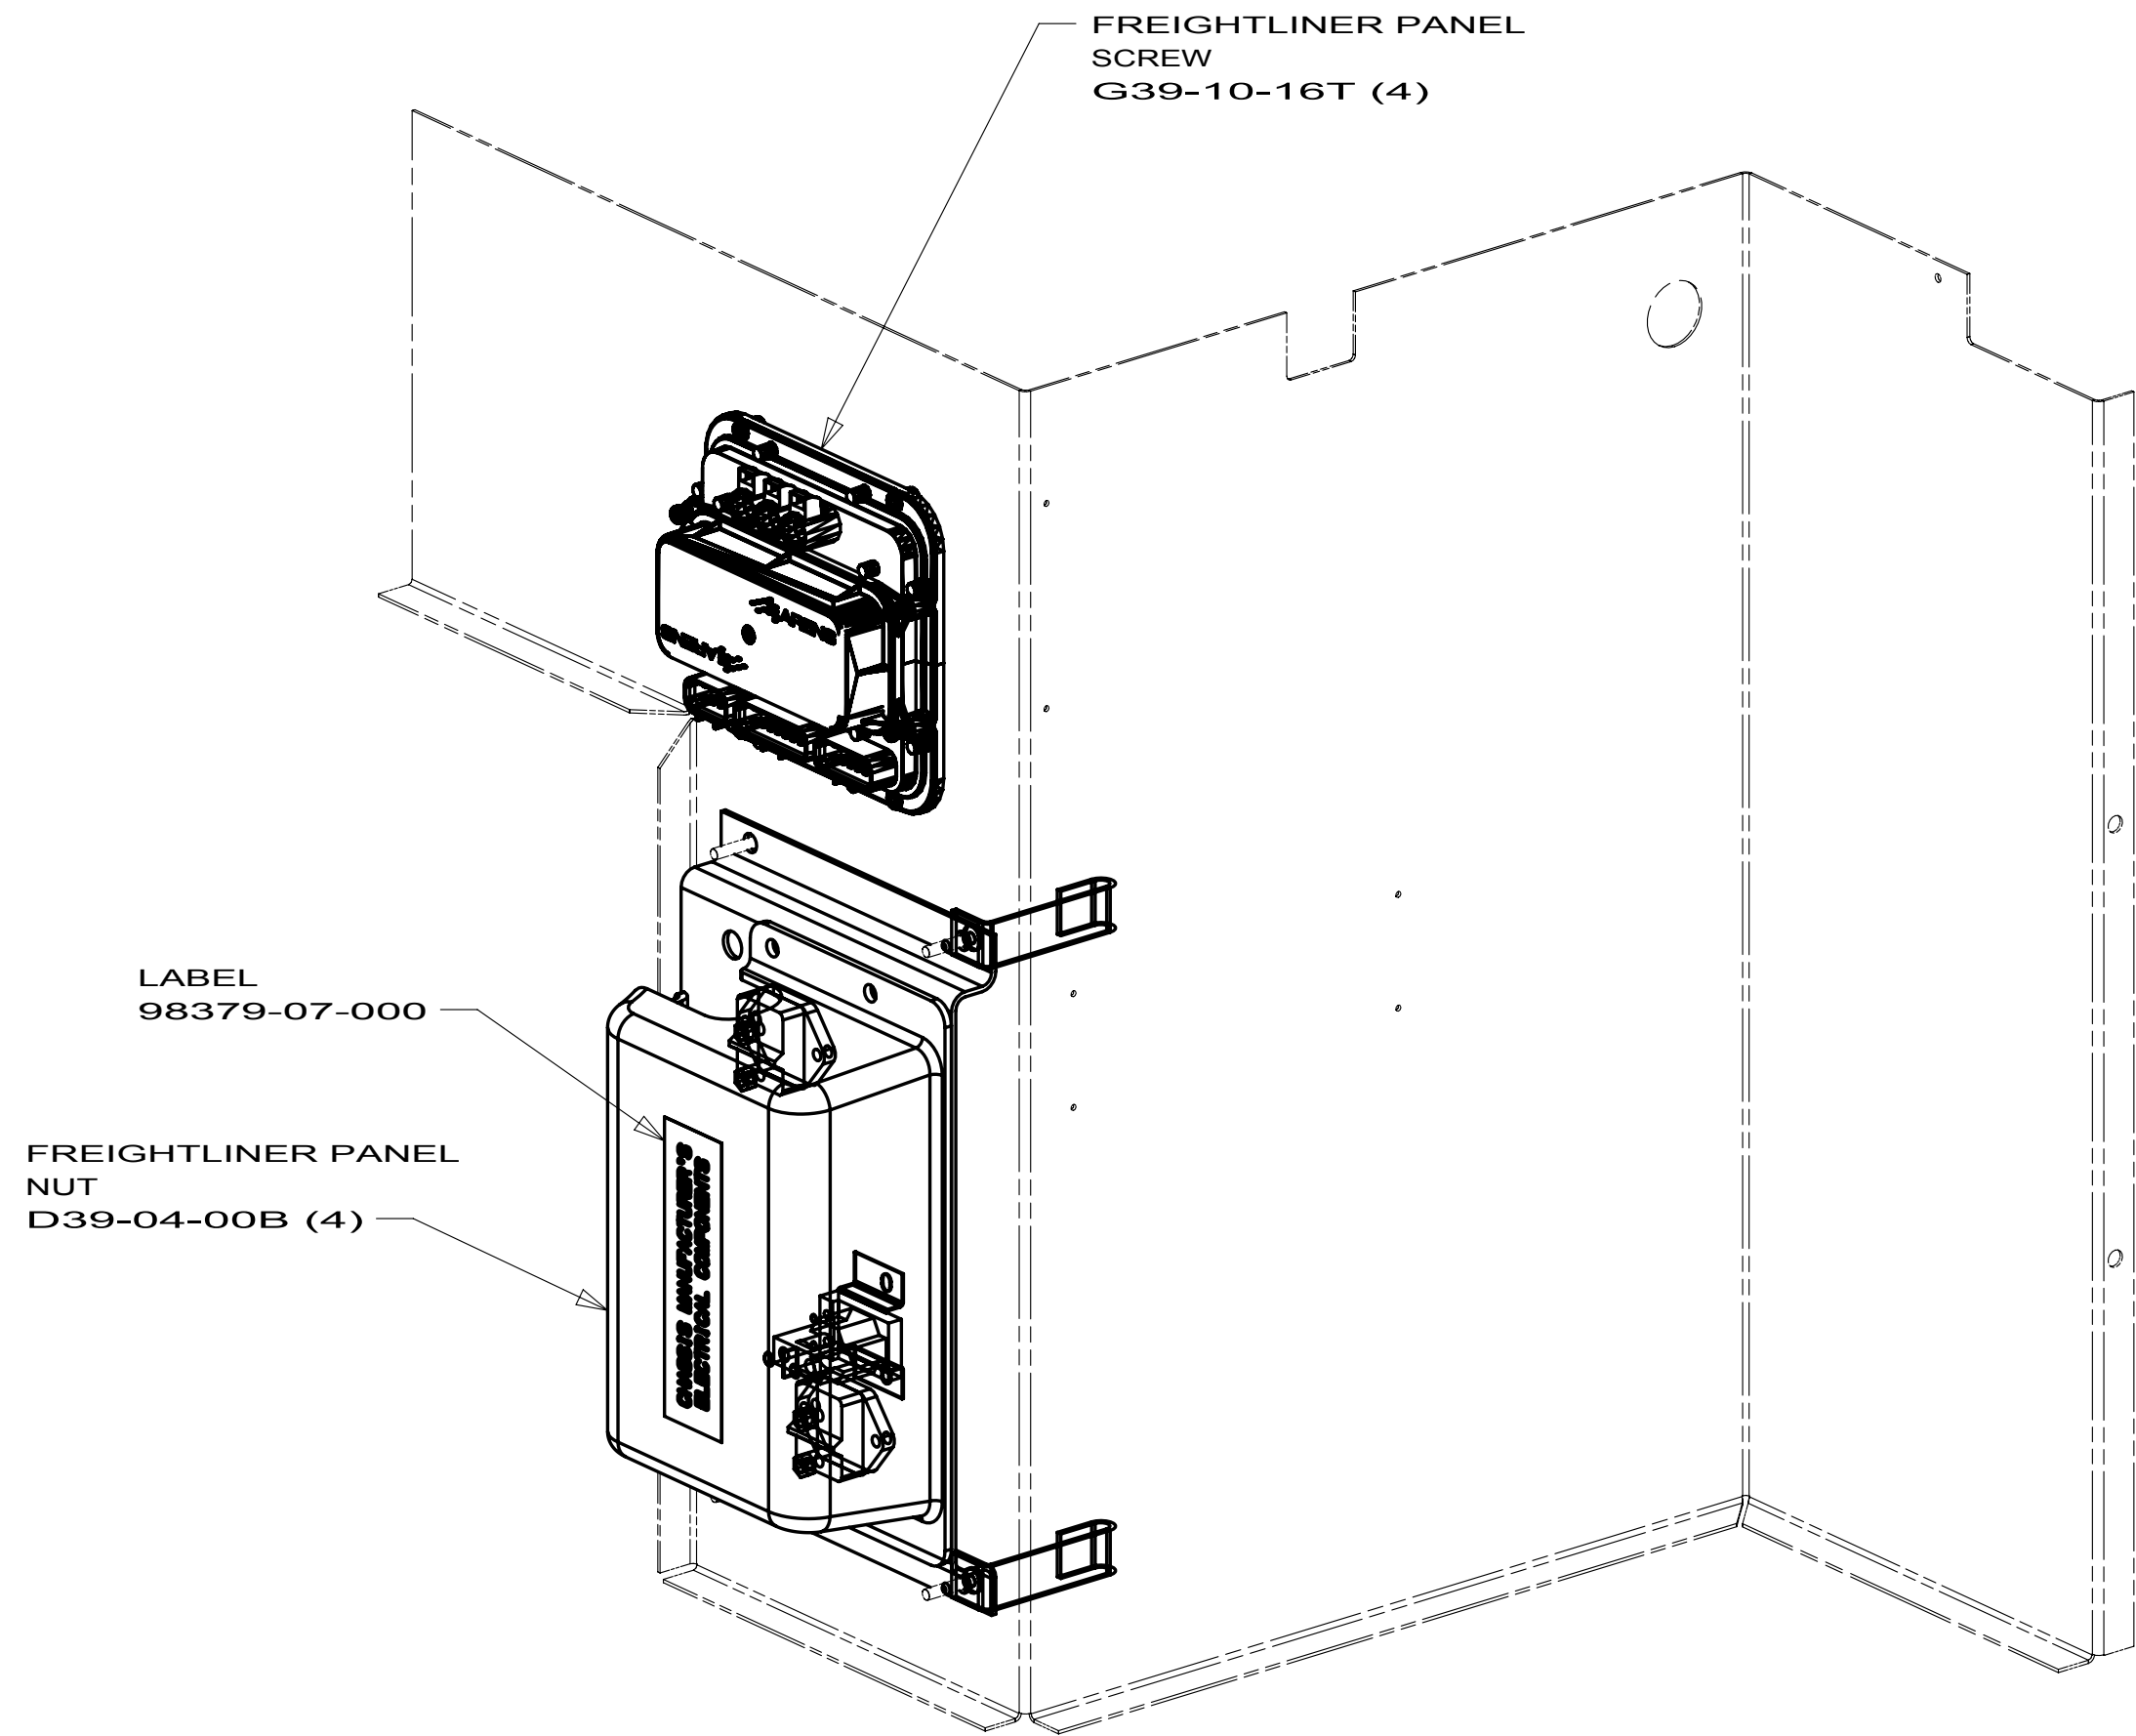


VIEW BB

- 4 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 3 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 2 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 1 CIRCUITS BRANCH FROM WIRE ASM-CHASSIS.

NOTES:

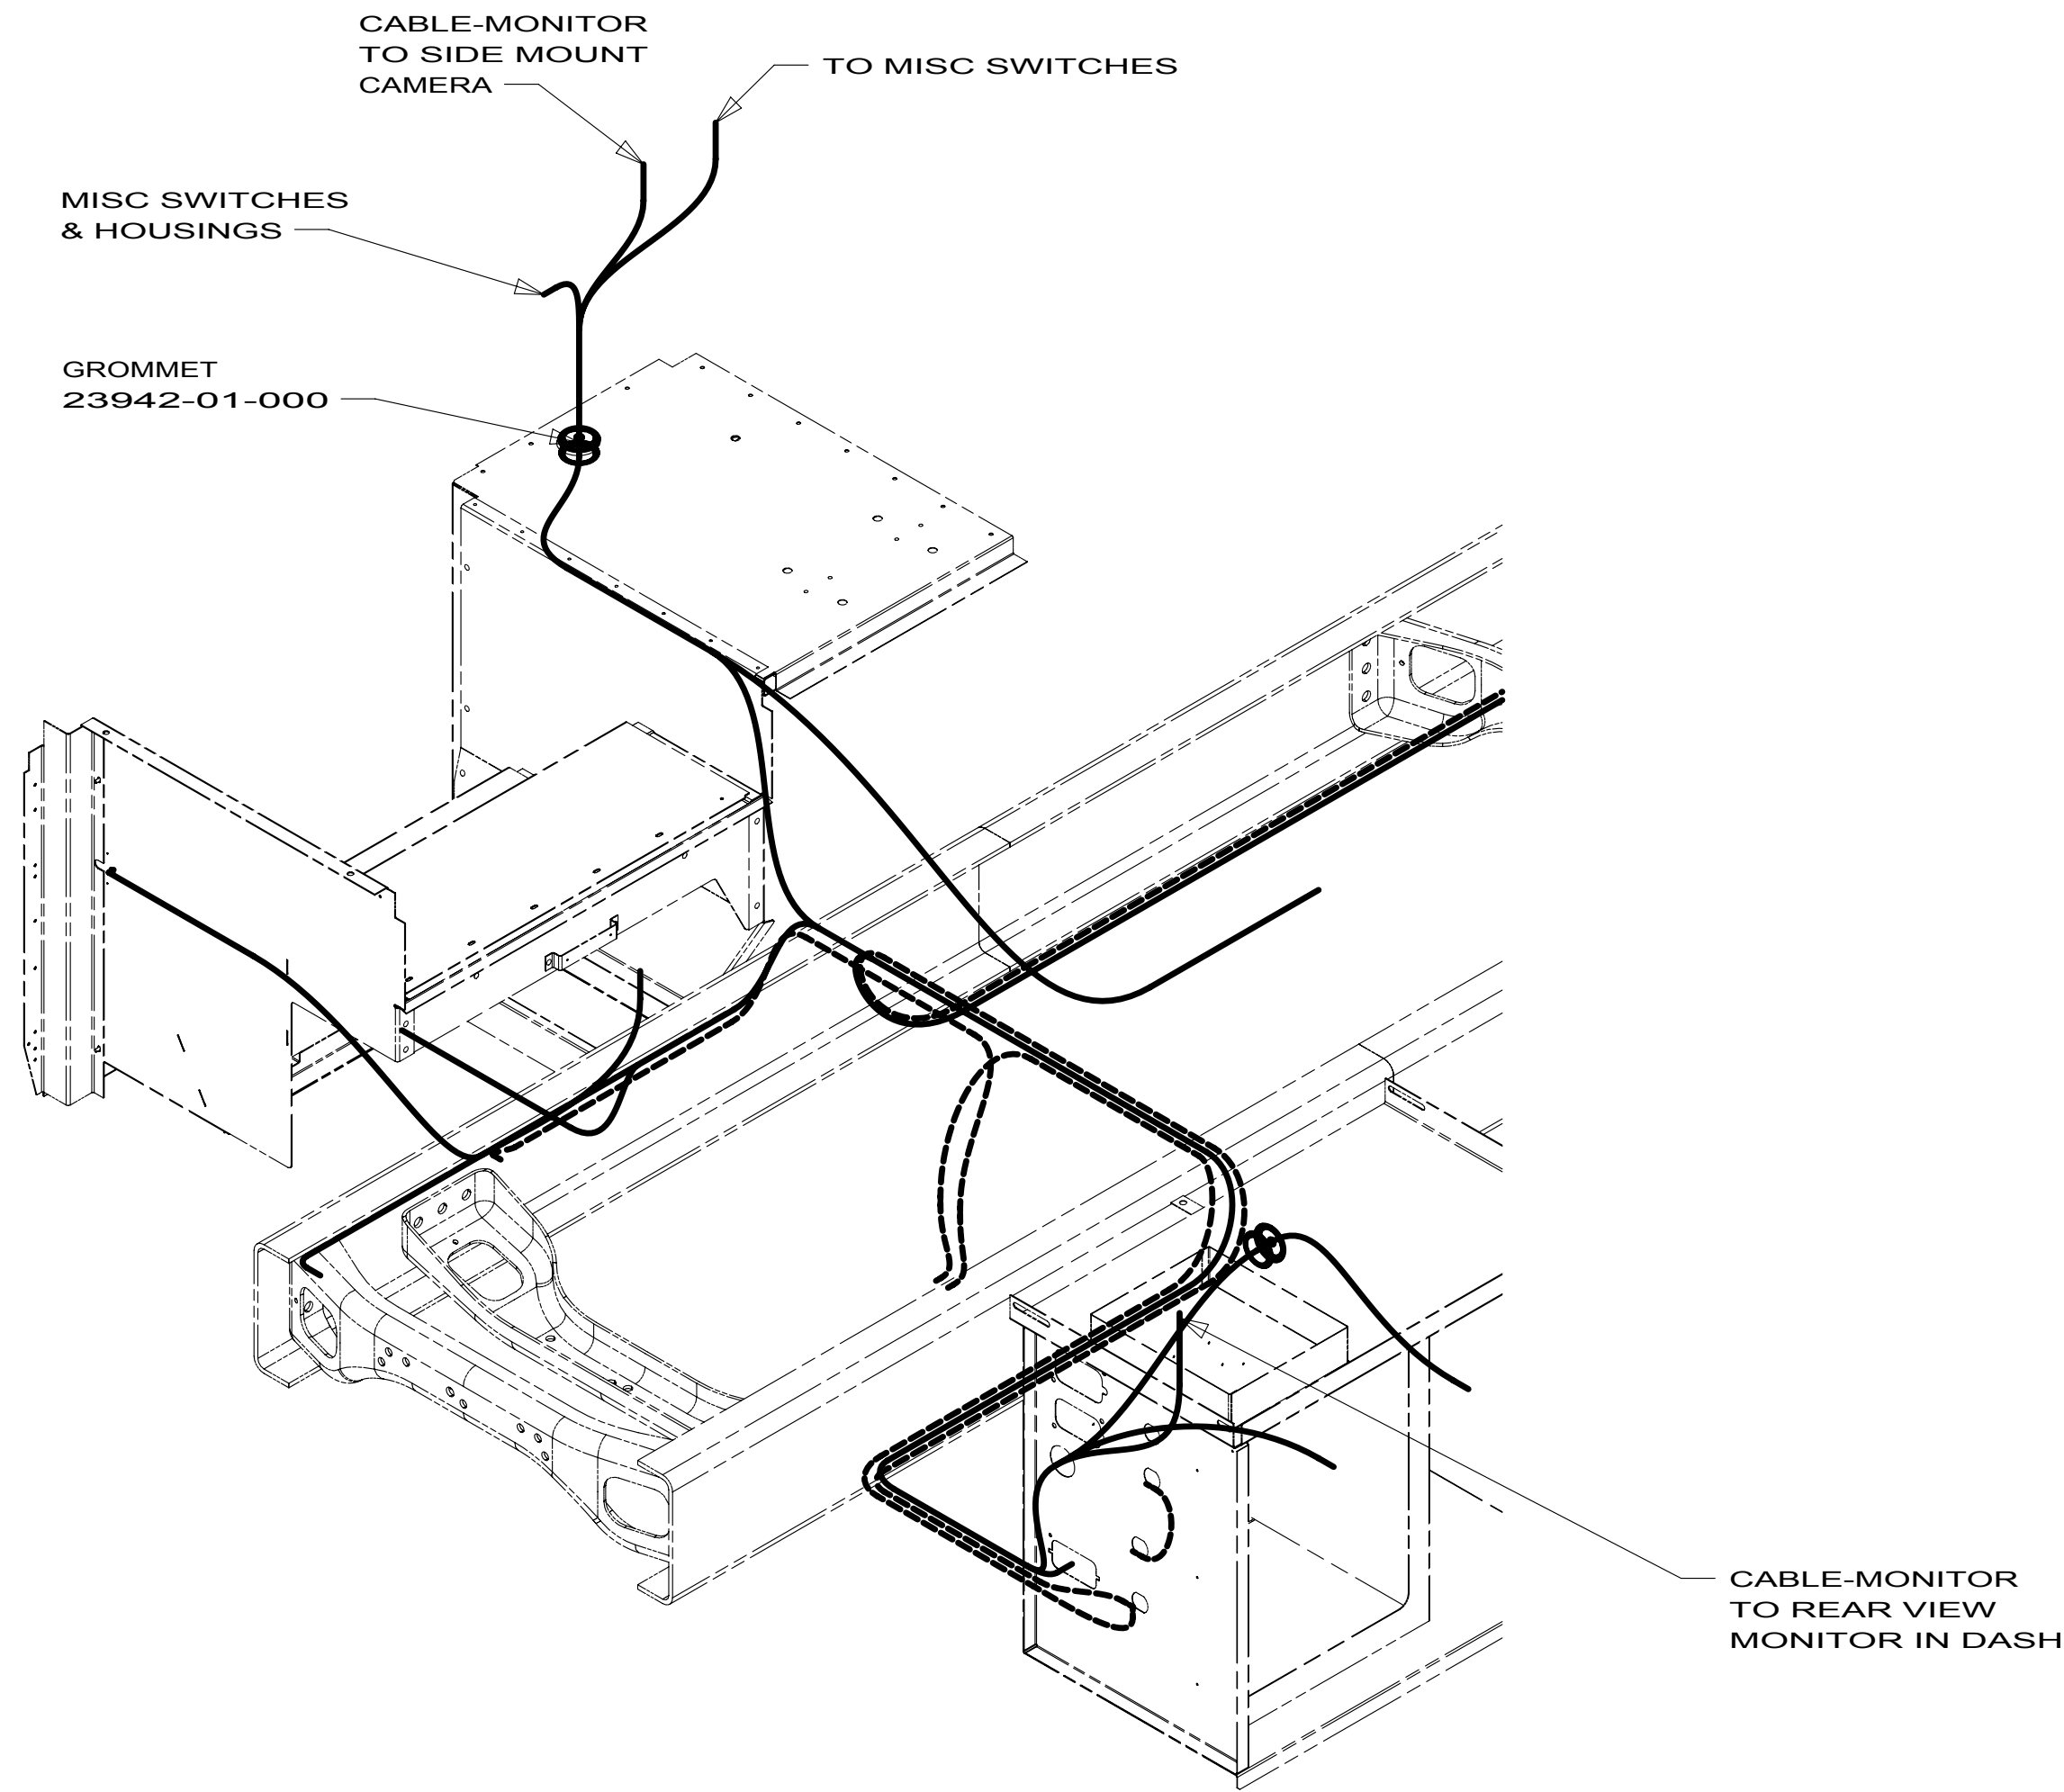

VIEW BD

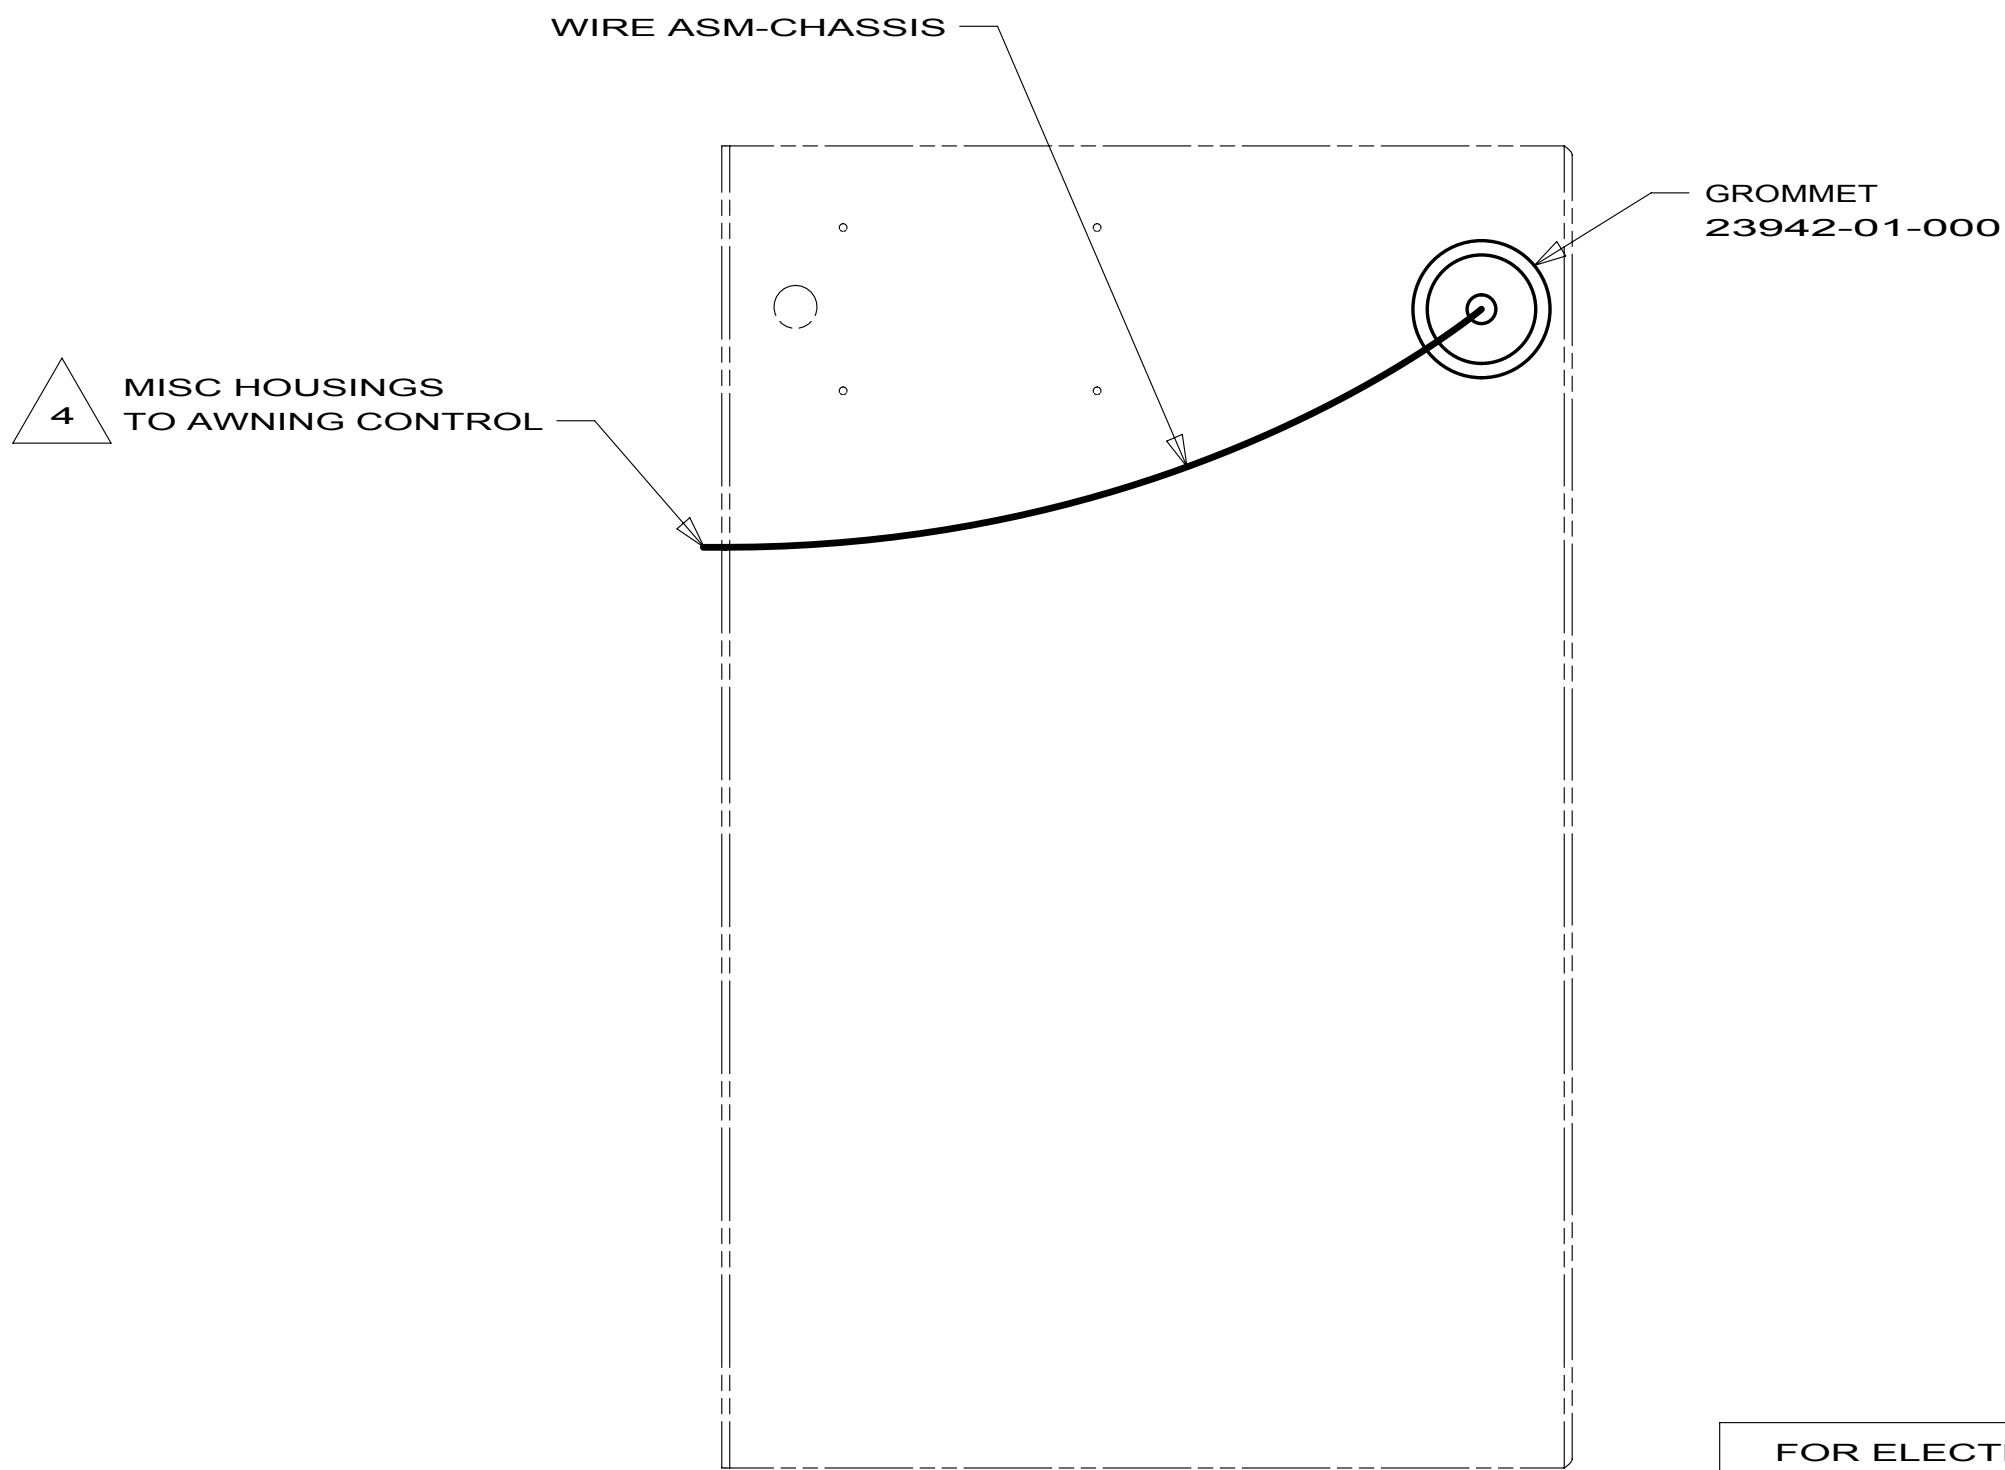

VIEW BC



FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 1LT FRTL 27,910 340 6.7L 6 SPEED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

- 1B1 265 1LT

FIRST USED		
10 P39N		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-CHASSIS		
SHEET 2	PART NO 172893	REV

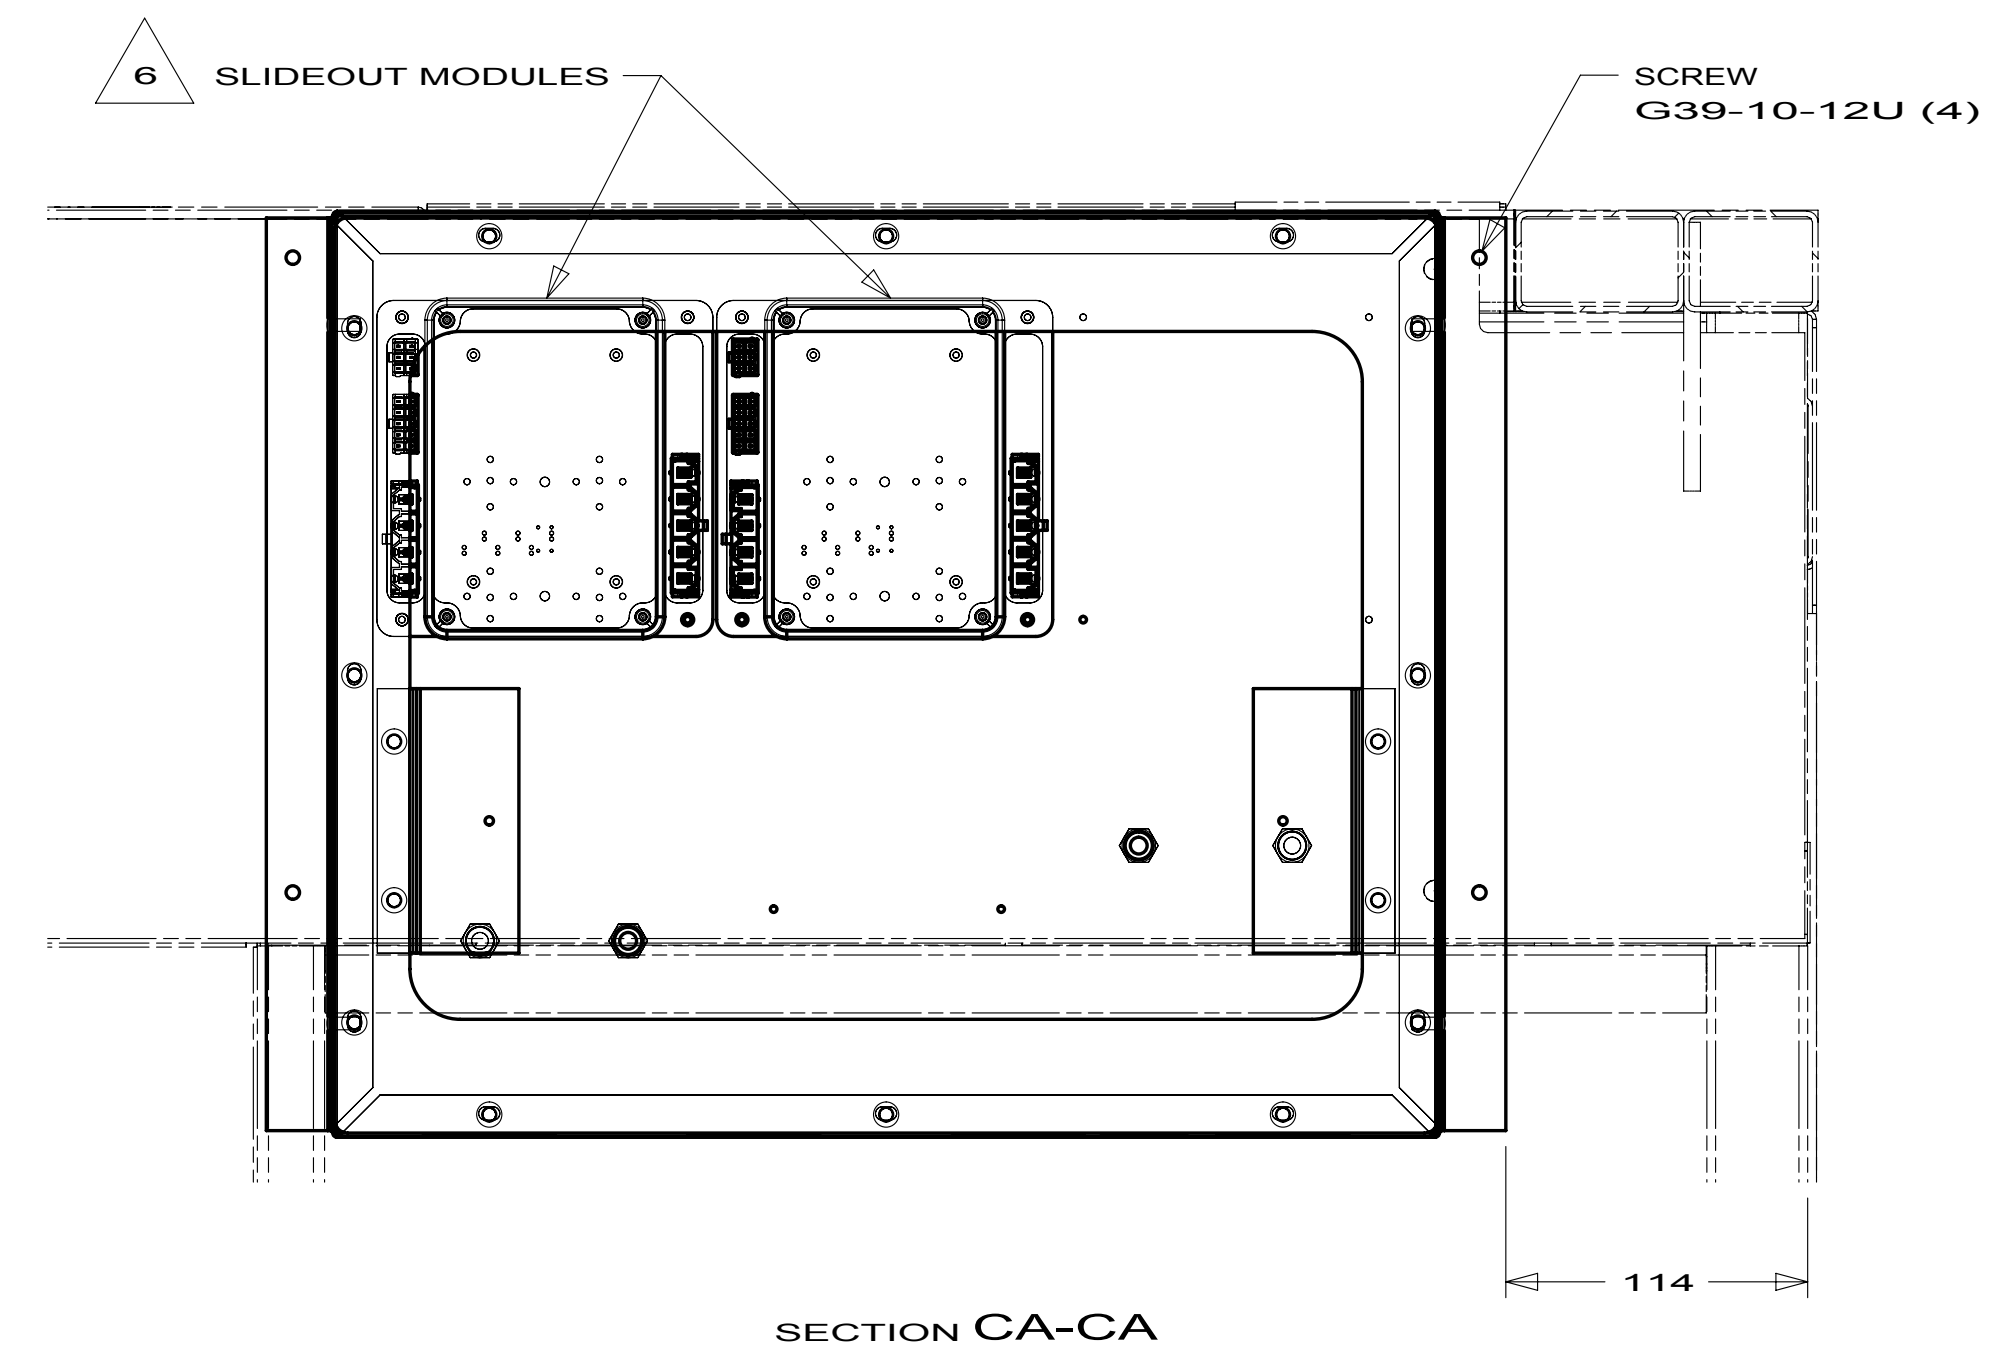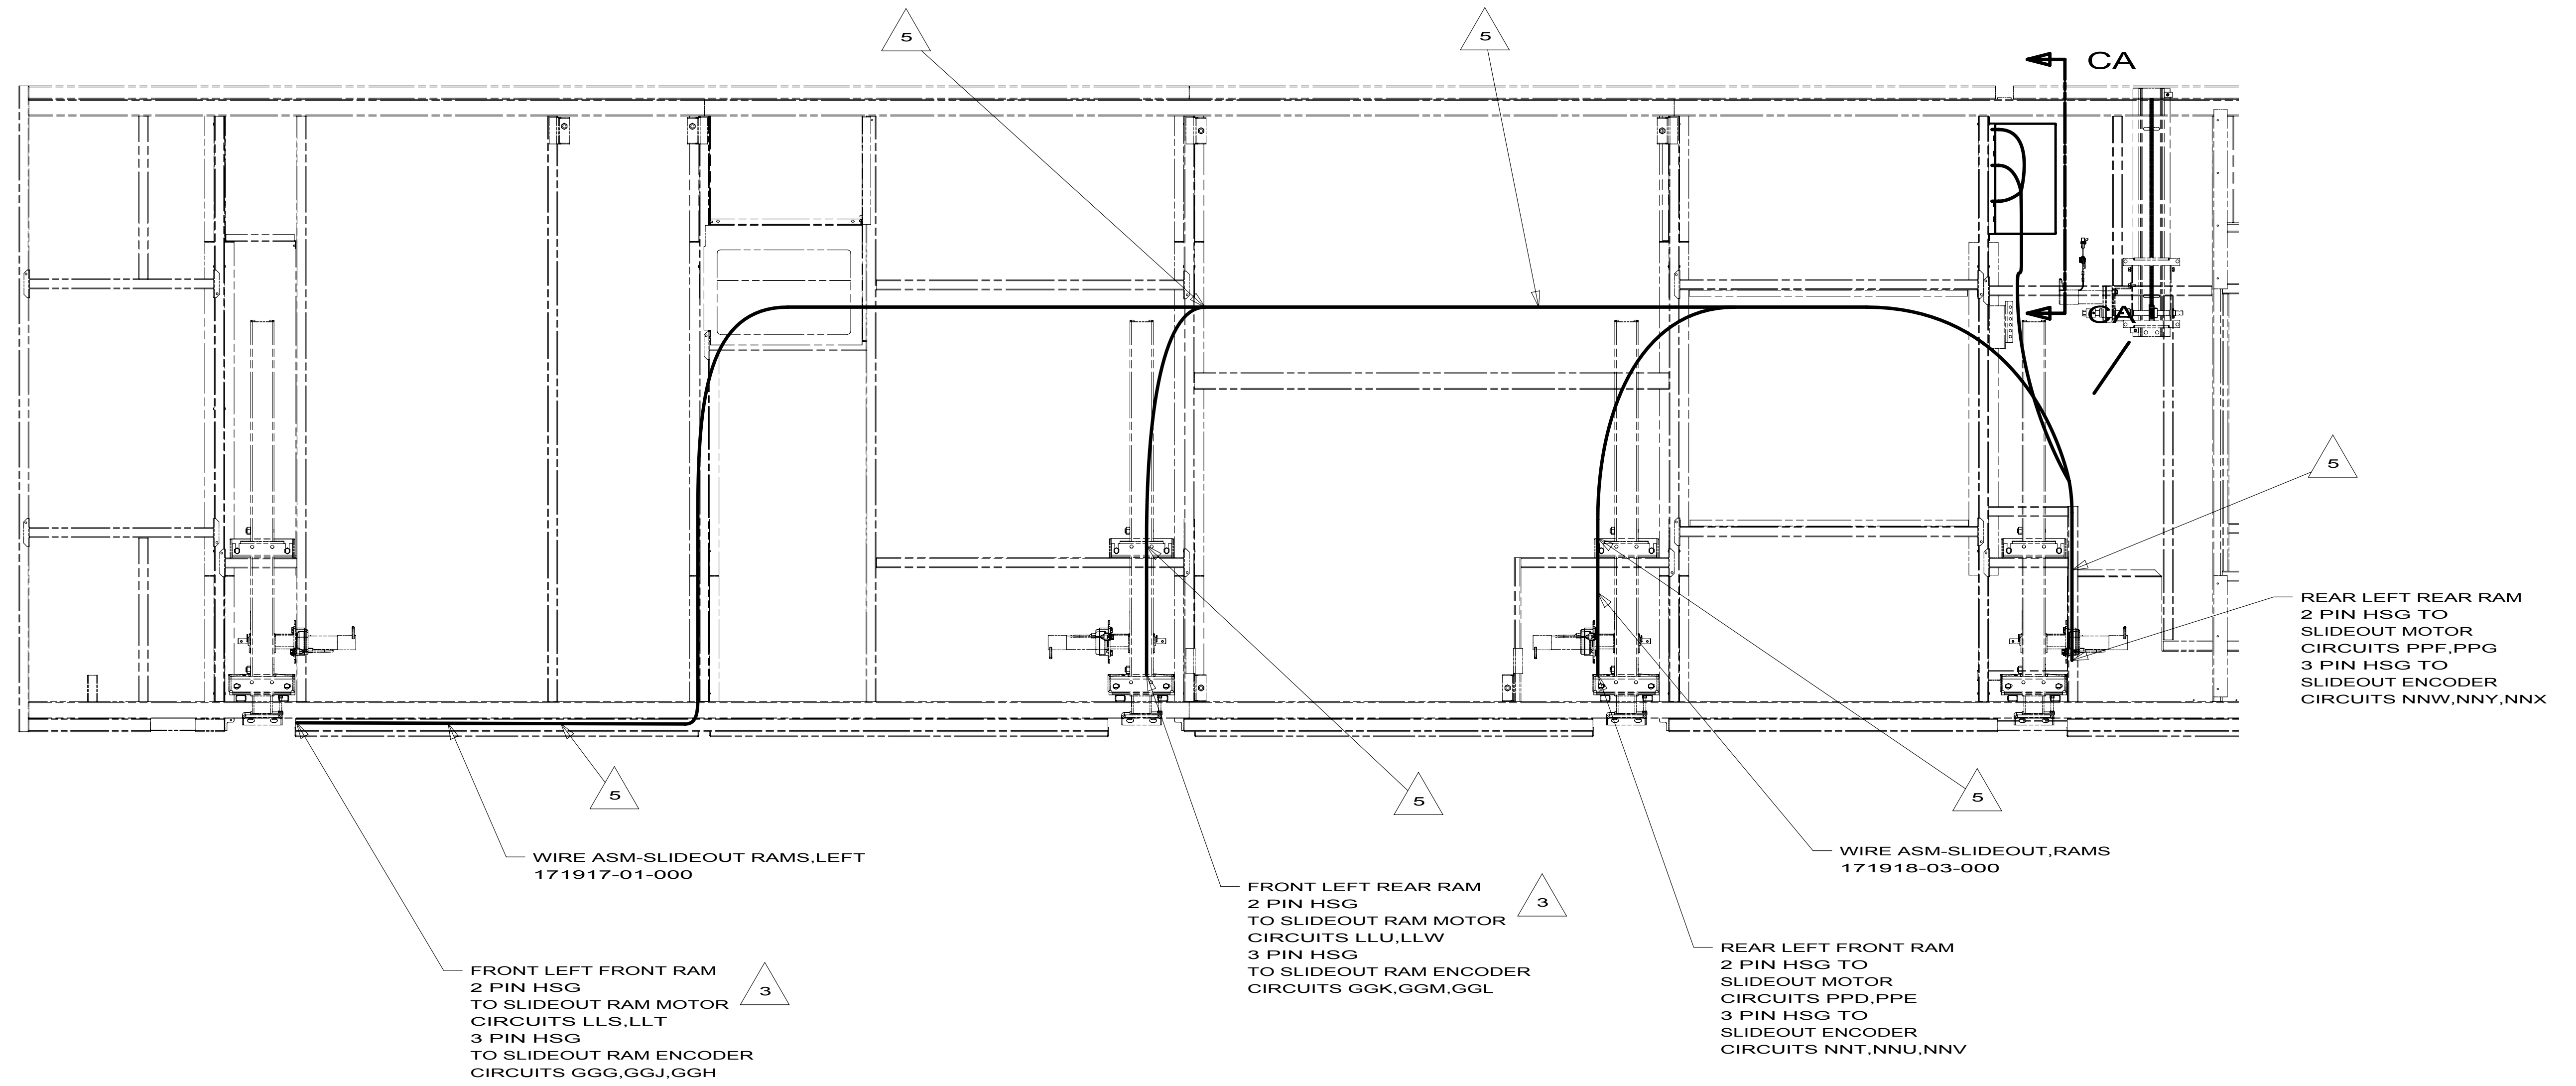

- 6 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 5 WIRES ROUTED IN COMPARTMENTS IN THIS AREA.
- 4 ROUTE WIRES AT GIVEN DIMENSION SO THAT THE WIRES ARE NOT PINCHED BY HOLDING TANK.
- 3 SECURE SLIDEOUT RAM WIRES TO SLIDEOUT MOTOR WITH WIRE TIE 8343-04-000.
- 2 SEE WIRING DIAGRAM-BODY, 12V FOR ADDITIONAL INFORMATION.

1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000
OR WIRE TIE 8343-02-000 EVERY 600MM, UNLESS OTHERWISE
SPECIFIED.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

1LT FRTL 27,910 340 6.7L 6 SPEED

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 1LT

10 P39N

DO NOT SCALE DRAWING

TITLE: **WIRING INSTL-CHASSIS**

0/9/2009

8

7

6

5

4

3

2

1

DRAWING NO.

SHEETS

171528-01

1,2,3

171528-02

1,4,5

171528-03

1,6

171528-04

1,7

P40L

P40T

P39N

P34Y

P40L

P40T

P39N

P34Y

CABLE ASM-COACH BATTERY (YEL)

141417-52-038

141417-52-037

141417-52-008

141417-52-046

CABLE ASM-COACH BATTERY GND (BLK)

133568-11-023

133568-11-020

133568-12-012

133568-11-008

CABLE ASM-CHASSIS BATTERY (PUR)

141416-15-021

141416-15-025

141416-15-012

141416-15-039

CABLE ASM-BATTERY MODE SOLENOID (RED)

141417-35-023

141417-35-025

141417-35-015

141417-35-039

CABLE ASM-GENERATOR (GRN)

141416-42-025

141416-42-025

141416-42-025

141416-42-025

CABLE ASM-GENERATOR (GND)

133566-12-013

133566-12-013

133566-12-013

133566-12-013

CABLE ASM-FRONT LEFT COMPT PASS THRU STUD (GRN)

141416-42-125

141416-42-130

141416-42-120

141416-42-105

CABLE ASM-INVERTER FUSE

141416-62-017

141416-62-014

141417-01-003

141417-01-006

CABLE ASM-INVERTER (ORG)

141416-61-028

141416-61-045

141415-62-065

141415-62-045

CABLE ASM-INVERTER GND (BLK)

133567-14-036

133567-14-057

133566-12-055

133566-12-025

LEVELING SYSTEM POWER CABLE (BLU)

141416-22-116

141416-22-116

141416-22-105

141416-22-095

LEVELING SYSTEM GND CABLE (BLK)

133566-11-005

133566-11-005

133566-11-005

133566-11-005

CABLE ASM-TEMPERATURE,BATTERY

172438-04-000

172438-04-000

CABLE ASM-RED JUMPER BETWEEN POSITIVE POSTS IN LEFT FRONT COMPT

133568-01-002

133568-01-002

133568-01-002

133568-01-002

CABLE ASM-JUMPER, NEG #1

133568-11-003

133568-11-003

133568-11-003

133568-11-003

CABLE ASM-JUMPER, NEG #2

133568-11-003

133568-11-003

CABLE ASM-JUMPER, POS #1

133568-01-003

133568-01-003

133568-01-003

133568-01-003

CABLE ASM-JUMPER, POS #2

133568-01-003

133568-01-003

CABLE ASM-JUMPER, POS #3

133568-01-002

133568-01-002

CABLE ASM-JUMPER, NEG #3

133568-11-002

133568-11-002

CABLE ASM-JUMPER,CHASSIS POSITIVE

133568-02-008

141417-35-006

CABLE ASM-CONVERTER,POS

156203-03-065

156203-03-045

CABLE ASM-CONVERTER,NEG

156203-04-055

156203-04-025

CABLE ASM-FUSE,JUMPER

141415-01-002

141415-01-002

2

SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.

1.

SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1AF

FRTL 32,350 360HP 8.3L 6-SPD

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

1AF

WINNEBAGO INDUSTRIES

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.

DFTD

ORIG. DATE

CHRR

ALL DIMENSIONS ARE IN MILLIMETERS

P.E.

M.E.

FIRST USED

DSNR

10 P-SERIES

UNSPECIFIED TOLERANCES ARE:

MATERIAL:

WHOLE DIM (X)

±

3

ONE-PLACE (X.X)

±

1.5

TWO-PLACE (X.XX)

±

0.50

ANGLE

±

1°

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

TITLE:

BATTERY INSTL

SHEET 1 OF 7



PART NO 171528

REV

REF:

1

11/24/2009

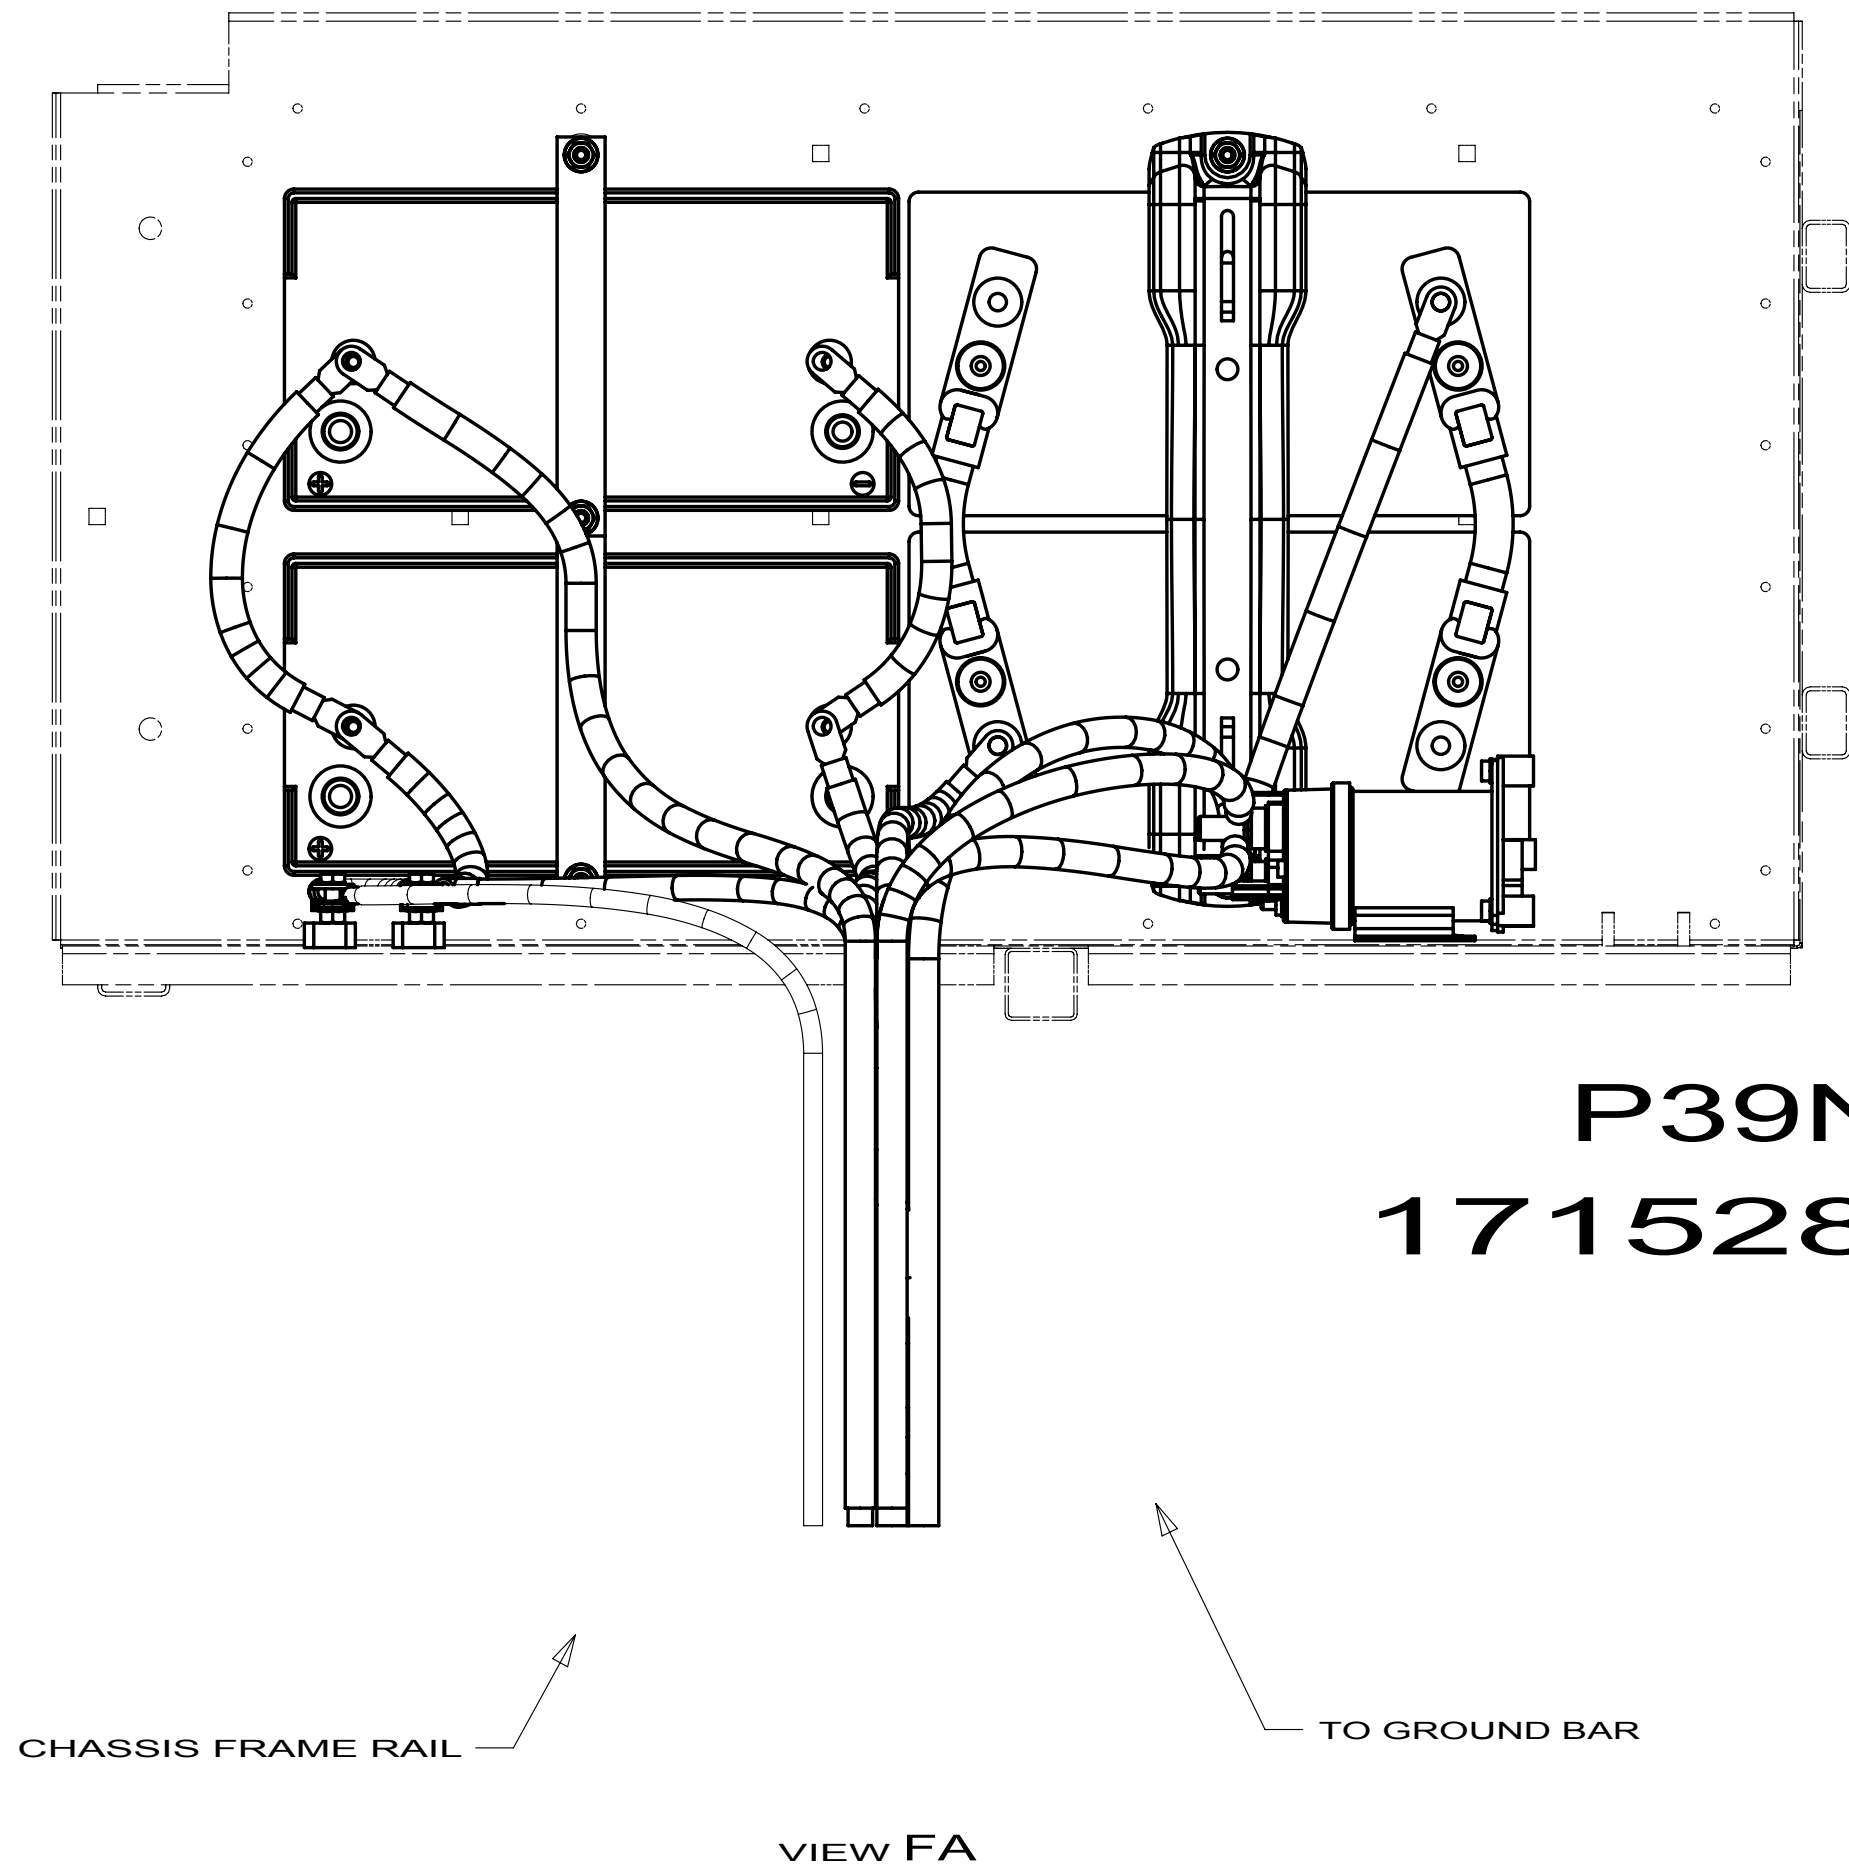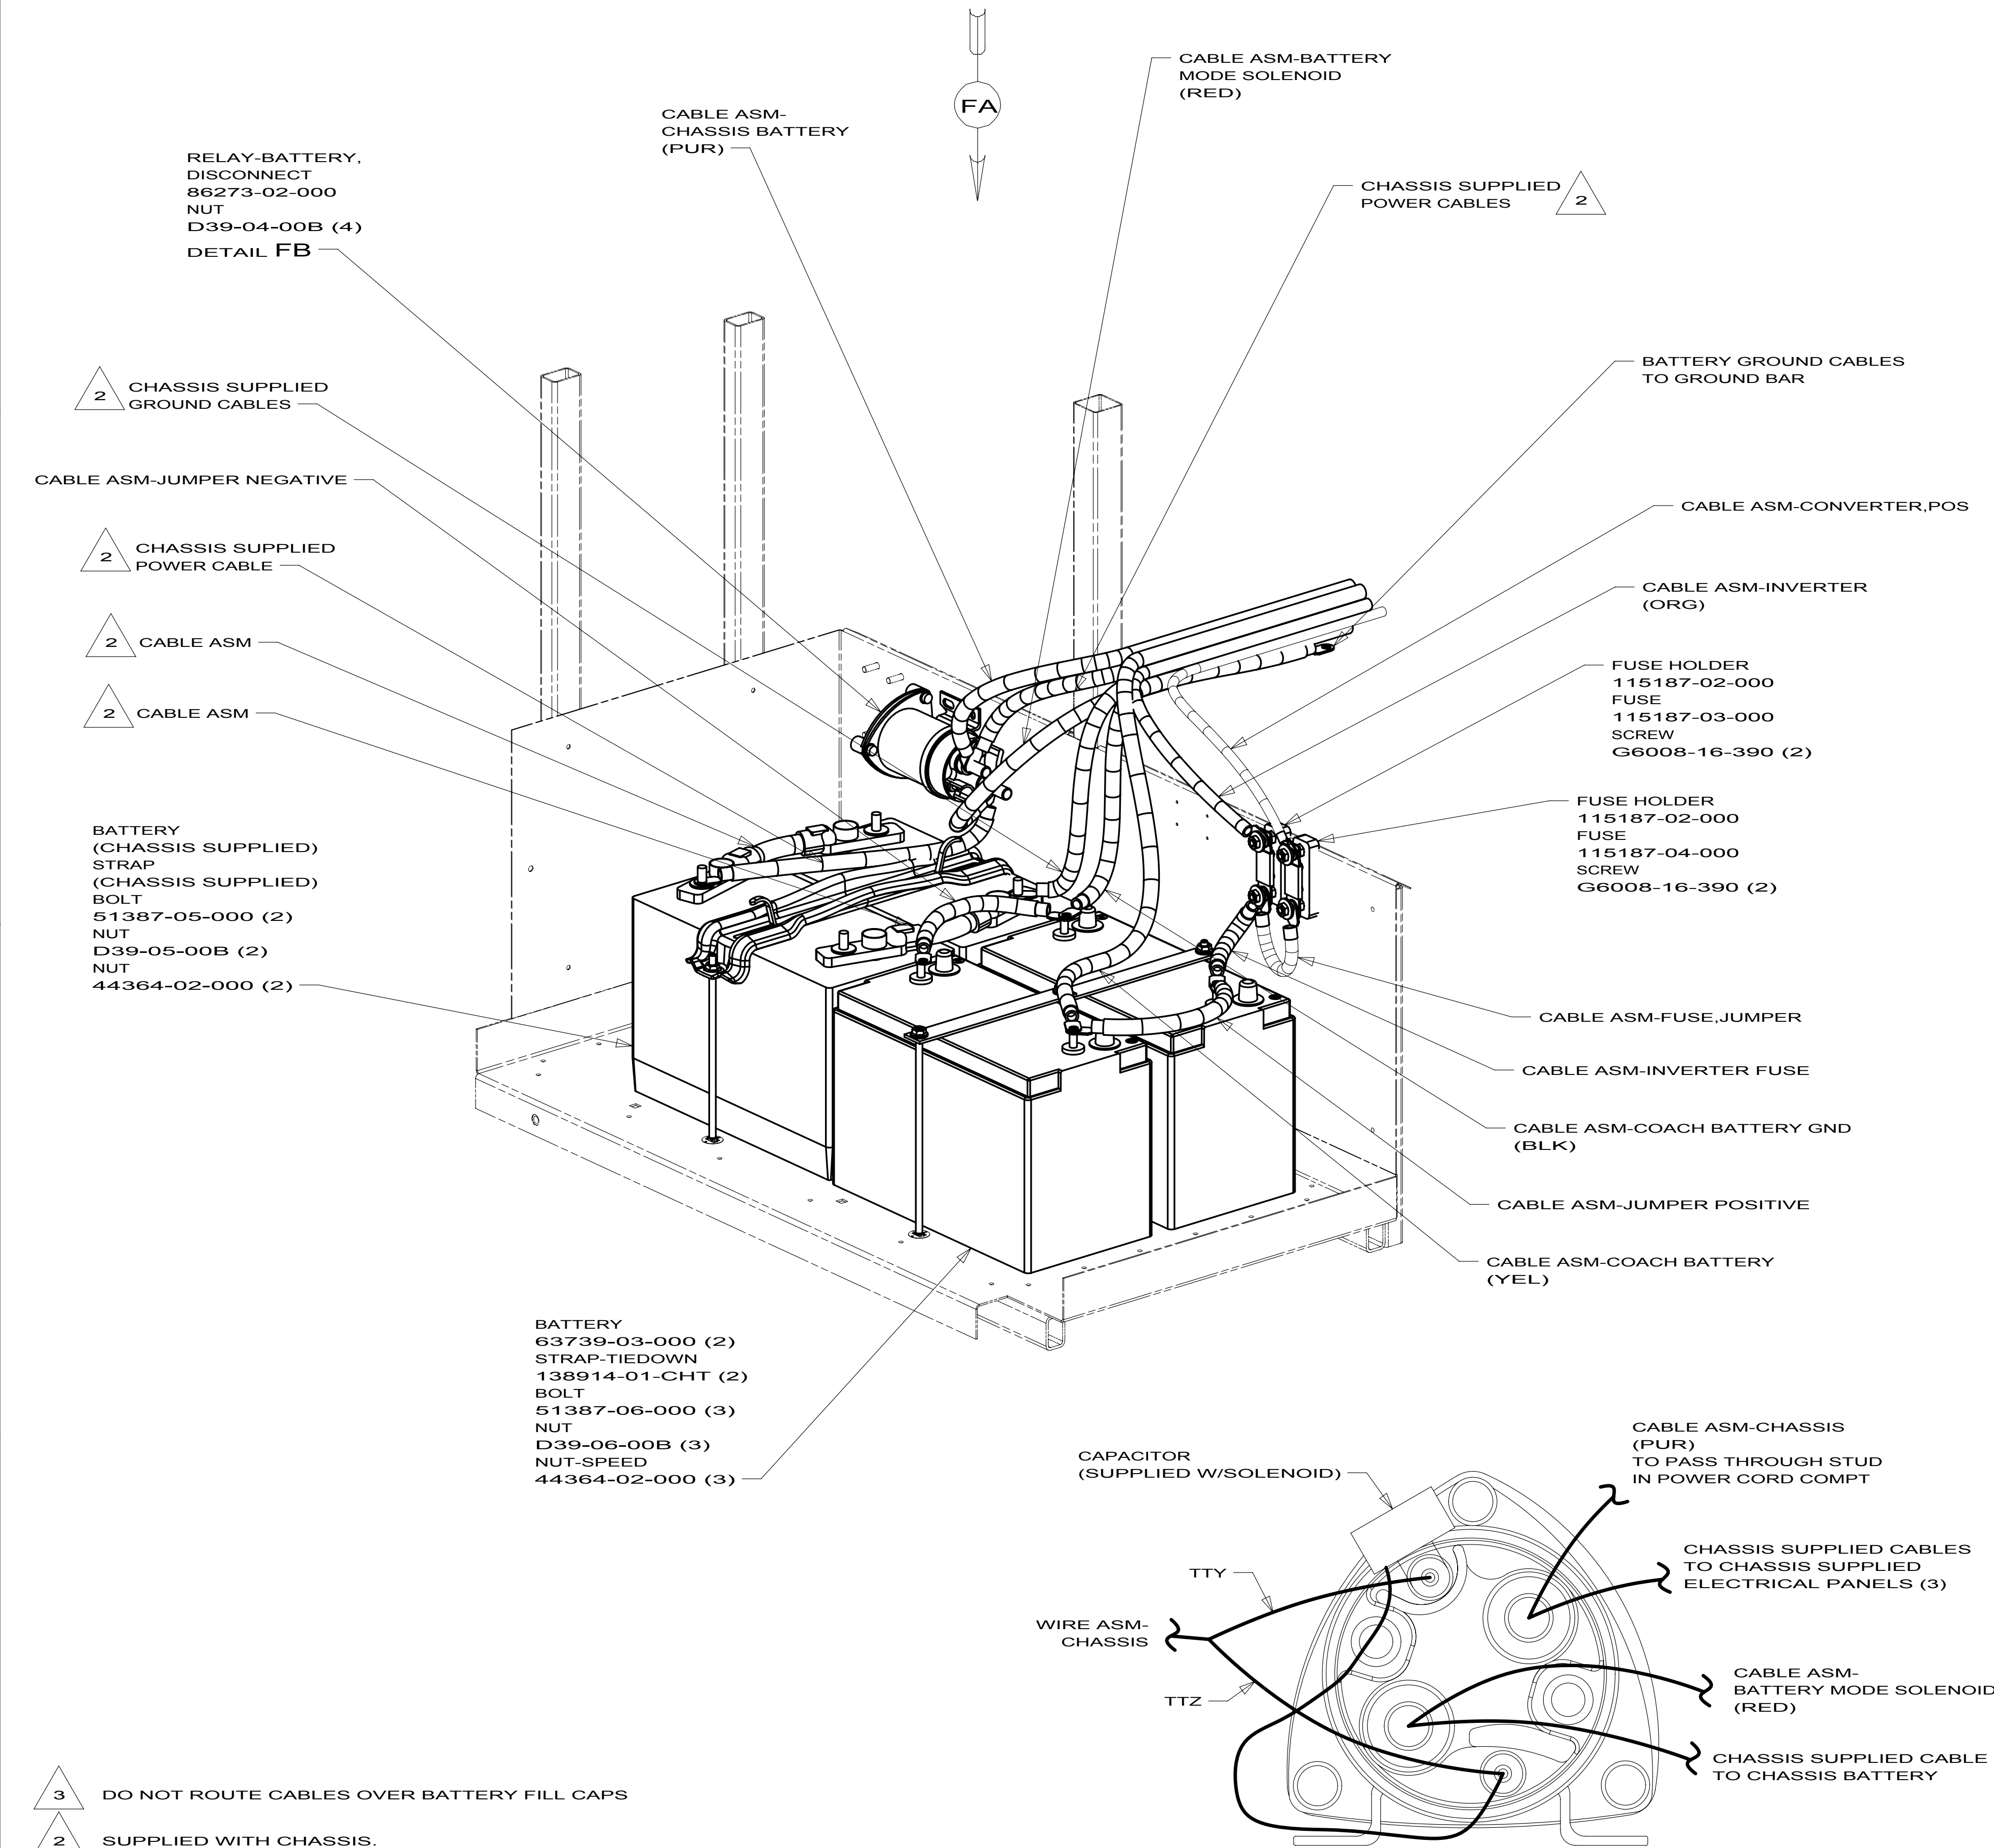

3 DO NOT ROUTE CABLES OVER BATTERY FILL CAPS

2 SUPPLIED WITH CHASSIS.

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1LT	FRTL 27,910 340 6.7L 6 SPEED	
265	CODES/STANDARDS-CSA/CMVSS	
1B1	CODES/STANDARDS USA	
1B1	265	1LT
FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
BATTERY INSTL		
SHEET 6	PART NO 171528	REV

8

7

6

5

4

3

2

1

TERMINALS

NO.	PART NUMBER	DESCRIPTION
B-1 B-2 B-11 B-12	50003-01 50004-01 50003-02 50004-02	TERMINAL-PIN, 16-14 GA,.156 DIA TERMINAL-RECP, 16-14 GA,.156 DIA TERMINAL-PIN, 16-14 GA,.180 DIA TERMINAL-RECP, 16-14 GA,.180 DIA
WP-1 WP-2 WP-3	106950-01 106950-02 106950-03	TERMINAL-PIN, 16-14 GA TERMINAL-PIN, 10-12 GA TERMINAL-PIN, 8 GA
R-1 R-2 R-3 R-4 R-5 R-6 R-7 R-8 R-9	35416-01 35416-02 35416-03 35416-04 37018-01 102777-01 102777-02 102777-03 33787-01	TERMINAL-RING, #10 STD, 8 GA TERMINAL-RING, #10 STD, 6 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, 5/16 STD, 12-10 GA TERMINAL-RING, #6 STD, 14-16 GA TERMINAL-RING, #6 STD, 10-12 GA TERMINAL-RING, #6 STD, 8 GA TERMINAL-RING, #10 STD, 14 GA
R-60 R-61 R-62 R-63 R-64 R-65 R-66 R-67 R-68 R-69 R-70 R-71	8325-01 8326-01 8327-01 8328-01 8328-02 8329-01 8331-01 8332-01 8332-02 8350-01 99275-02 101397-01	TERMINAL-RING, 1/4 STD, 14-16 GA TERMINAL-RING, 3/8 STD, 14-16 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 8 GA TERMINAL-RING, 3/8 STD, 4 GA TERMINAL-RING, 1/4 STD, 6 GA TERMINAL-RING, 1/4 STD, 10 GA TERMINAL-RING, 3/8 STD, 6 GA TERMINAL-RING, 7/16 STD, 8 GA TERMINAL-RING, #10 STD, 14-16 GA
R-91 R-92 R-93 R-94	88791-01 88791-02 8348-01 99275-01	TERMINAL-RING, 3/8, 90°, 1/0 GA TERMINAL-RING, 3/8, 90°, 2 GA TERMINAL-RING, 3/8 STD, 2 GA TERMINAL-RING, 7/16 STD, 1/0 GA
RF-51 RF-52	7944-01 7945-01	TERMINAL-SPADE, 12-10 GA, #8 STUD TERMINAL-SPADE, 18-14 GA, #8 STUD
TR-1 TR-2 TR-3 TR-11 TR-12	47443-01 47443-02 47443-05 47443-03 47443-04	TERMINAL-RECP, 16-14 GA,.25, INS TERMINAL-RECP, 12-10 GA,.25, INS TERMINAL-RECP, 22-18 GA,.25, INS TERMINAL-RECP, 16-14 GA,.19, INS TERMINAL-RECP, 16-14 GA,.11, INS
TR-21	80015-01	TERMINAL-RECP, 22-18 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-22	80015-02	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-23	80015-03	TERMINAL-RECP, 16-14 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-24	80015-04	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .020
TR-51 TR-52 TR-53 TR-54 TR-55	7940-01 23809-01 23809-02 49270-01 7940-02	TERMINAL-RECP, 16-12 GA,.25, UNINS TERMINAL-RECP, 16-14 GA,.19, UNINS TERMINAL-RECP, 18-20 GA,.25, UNINS TERMINAL-RECP, 18-20 GA,.19, UNINS TERMINAL-RECP, 10 GA, .25, UNINS
TT-1 TT-2 TT-11	85745-02 85745-03 85745-04	TERMINAL-TAB, 16-14 GA,.25, INS TERMINAL-TAB, 10-12 GA,.25, INS TERMINAL-TAB, 18-22 GA,.19, INS
TT-51 TT-52	7942-01 7943-01	TERMINAL-TAB, 16-14 GA,.25, UNINS TERMINAL-TAB, 14-10 GA,.25, UNINS
MF6-1	129236-01	TERMINAL-FEM, M/P, 630, 10-12
MF6-2	129236-02	TERMINAL-FEM, M/P, 630, 14-16

SPLICES

NO.	PART NUMBER	DESCRIPTION
BS-1 BS-2 BS-3 BS-SB	31876-01 31876-02 31876-03 100070-01	SPLICE-BUTT, 16-14 GA, BLUE SPLICE-BUTT, 12-10 GA, YELLOW SPLICE-BUTT, 22-18 GA, RED SPLICE-BUTT, 14-16 GA, SHRINK,BLUE
BS-RB	112823-01	SPLICE-BUTT, 14-22 GA, REDUCER
BS-RS	173854-01	SPLICE-BUTT, 14-22 GA, REDUCER, SHRINK
S-1 S-2	7946-01 23808-01	SPLICE, 1-6 MM² SPLICE, 6-9 MM²
I-2 I-5	7956-02 7956-05	SHRINK WRAP .375 DIA SHRINK WRAP .25 DIA
SH-1	58028-01	SPLICE-HAT
S-10	101173-01	SPLICE-BARREL, 26300 CMA

NO.	PART NUMBER	DESCRIPTION
SP-1	90986-02	PLUG ASM-ELECTRIC STEP
SP-2	142524-01-000 098261-01-000 098262-07-000 098261-02-000 (3) 098262-01-000 (3)	HOUSING-4 PIN SOCKET-CONNECTOR SEAL-CONNECTOR SOCKET-CONNECTOR SEAL-CONNECTOR
HR-1	63910-01	HOUSING-RELAY
MP-8 MP-10 MPP CAV-1 CON-3	125323-02 125323-01 125324-01 125325-01 98262-03	HOUSING-PIN, 8 CAVITY HOUSING-PIN, 10 CAVITY TERMINAL-MALE, M/P, 150 SEAL-CAVITY, 150-SERIES M/P SEAL-CONNECTOR
LS-8 LS-10	125323-03 125323-04	LOCK-SECONDARY 8 POSITION LOCK-SECONDARY 10 POSITION
H-8 H-12	108355-01 108355-02	HOUSING-SWITCH, 8 POSITION HOUSING-SWITCH, 12 POSITION

NO.	PART NUMBER	DESCRIPTION
GEN-1	125323-02-000 125324-01-000 (4) 098262-03-000 (4) 125325-01-000 (4) 125323-03-000	HOUSING-8 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 8 POSITION
GEN-2	125323-01-000 125324-01-000 (5) 098262-03-000 (5) 125325-01-000 (5) 125323-04-000	HOUSING-10 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 10 POSITION

HOUSINGS AND TERMINALS

NO.	PART NUMBER	DESCRIPTION
HS-2 HS-3 HS-4 HS-5 HS-6 HS-7 HS-9 HS-12 HS-15 HS-2-R	88474-10 88474-09 88474-08 88474-07 88474-06 88474-05 88474-03 88474-01 88474-02 88474-12	HOUSING-SOCKET, 2 CAVITY HOUSING-SOCKET, 3 CAVITY HOUSING-SOCKET, 4 CAVITY HOUSING-SOCKET, 5 CAVITY HOUSING-SOCKET, 6 CAVITY HOUSING-SOCKET, 6 CAVITY-IN LINE HOUSING-SOCKET, 9 CAVITY HOUSING-SOCKET, 12 CAVITY HOUSING-SOCKET, 15 CAVITY HOUSING-SOCKET, 2 CAVITY-RED
HP-2 HP-3 HP-4 HP-5 HP-6 HP-7 HP-8 HP-9 HP-12 HP-15 HP-2-R HP-3-B HP-3-G HP-3-R	88473-10 88473-09 88473-08 88473-07 88473-06 88473-05 88473-04 88473-03 88473-01 88473-02 88473-15 88473-12 88473-13 88473-14	HOUSING-PIN, 2 CAVITY HOUSING-PIN, 3 CAVITY HOUSING-PIN, 4 CAVITY HOUSING-PIN, 5 CAVITY HOUSING-PIN, 6 CAVITY HOUSING-PIN, 6 CAVITY-IN LINE HOUSING-PIN, 8 CAVITY-IN LINE HOUSING-PIN, 9 CAVITY HOUSING-PIN, 12 CAVITY HOUSING-PIN, 15 CAVITY HOUSING-PIN, 2 CAVITY-RED HOUSING-PIN, 3 CAVITY-BLUE HOUSING-PIN, 3 CAVITY-GREEN HOUSING-PIN, 3 CAVITY-RED
TS-1 TS-2	88476-01 88476-02	SOCKET-CONNECTOR, 20-14 GA SOCKET-CONNECTOR, 12-10 GA
TP-1 TP-2	88475-01 88475-02	PIN-CONNECTOR, 20-14 GA PIN-CONNECTOR, 12-10 GA
HS2HA HP2HA	137208-01 137207-01	HOUSING-SOCKET, 2 CAVITY-HIGH AMP HOUSING-PIN, 2 CAVITY-HIGH AMP
TS-HA TP-HA	137210-01 137209-01	SOCKET-CONNECTOR, 10AWG HIGH AMP PIN-CONNECTOR, 10AWG HIGH AMP
H-HA	104100-01	HOUSING, 1 CAVITY 75 AMP
T-HA	104100-03	TERMINAL 10 AWG - 6 AWG 75 AMP

BALLOON CALLOUT LEGEND

110 V WIRE	TERMINALS/SPLICES	RECEPTACLES
PART NUMBER COLOR LENGTH	PART NUMBER QUANTITY	PART NUMBER CIRCUIT COLOR LOCATION
POWER CORD	CONDUIT	12 V WIRE
WIRE GAUGE LENGTH IN FEET APPROVAL/ LISTING	TYPE DIA IN 1/16" INCREMENTS LENGTH (mm)	CIRCUIT COLOR & WIRE GAUGE HOUSING POSITION/ TERMINATION

NOTES:

1

FOR RECP-BLANK, DET-X DENOTES DETAIL VIEW.

2

CONTACT WIRE PREP PRIOR TO USING FOR TOOLING PURPOSES.

8

7

6

5

4

3


2

1

REF:

1

2/16/2010

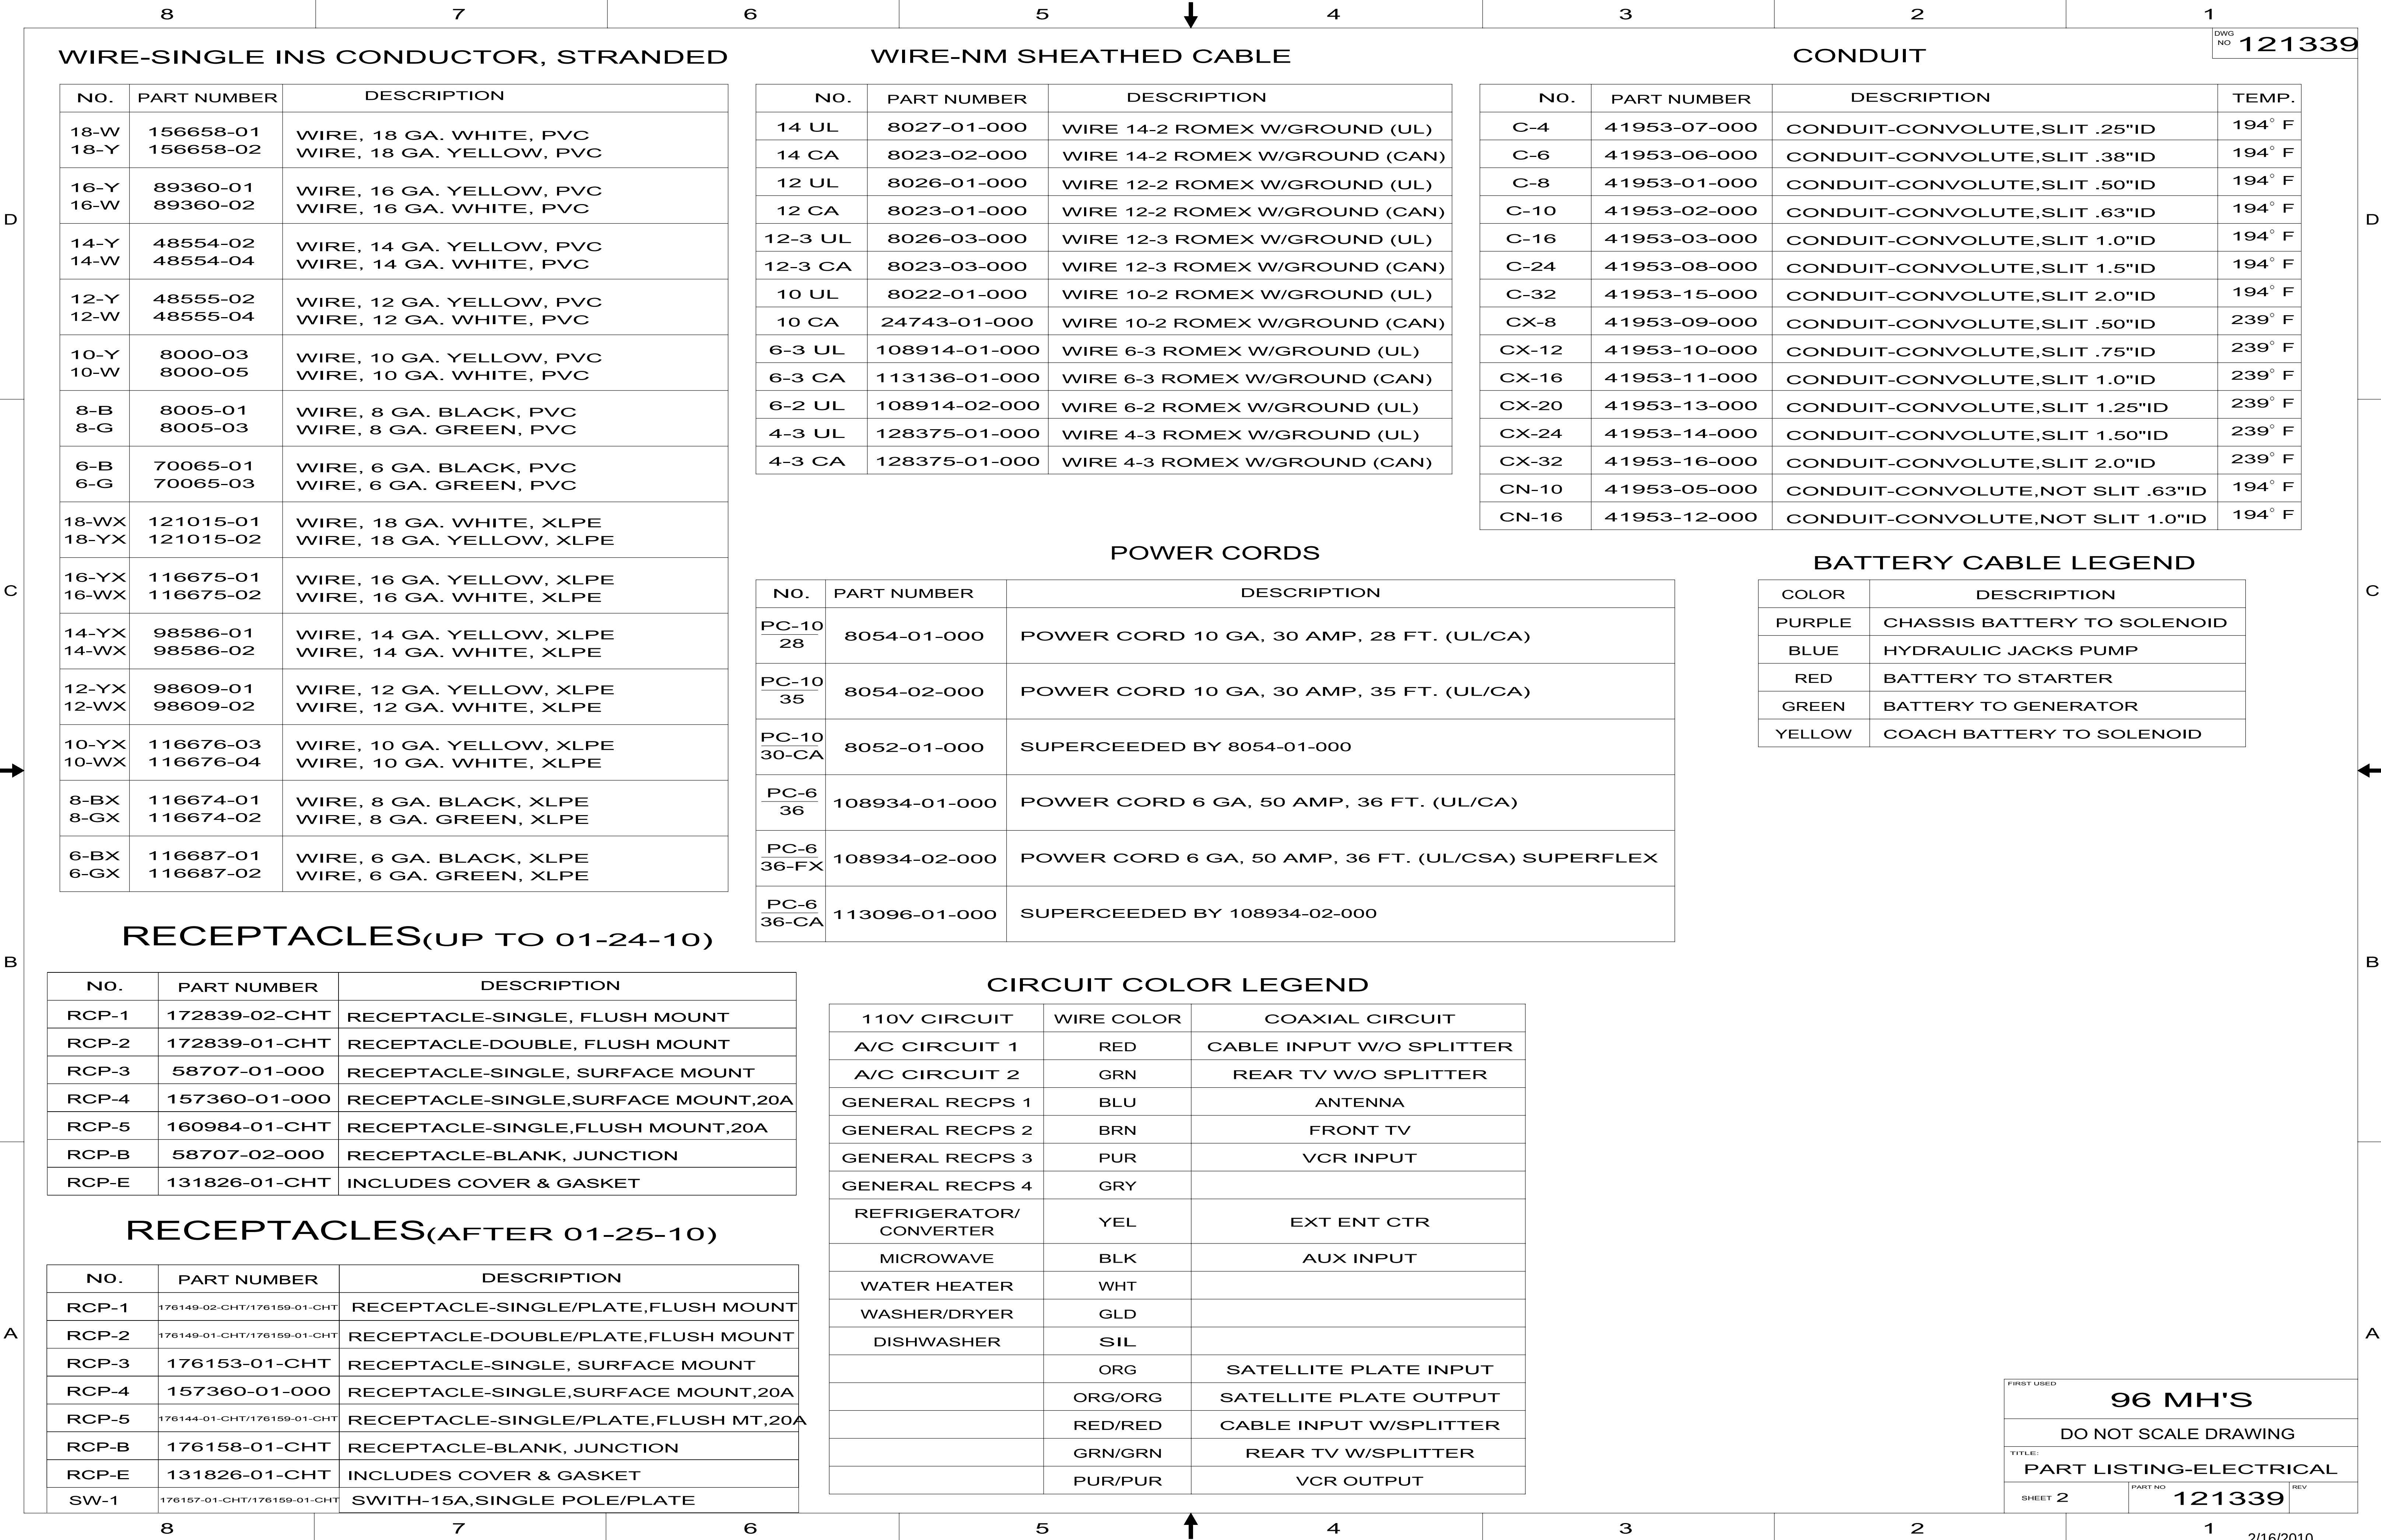

8

7

6

5








4

3




2

1

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-1	LAMP 98024-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-1	LAMP 98024-03-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-1	LAMP 98024-05-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-1	LAMP 98024-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N1	LAMP 98024-07-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LF2N1	LAMP 98024-08-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN1	LAMP 98024-09-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,PORCH

NO	PART NUMBER	DESCRIPTION
LEXT-1	LAMP 97917-01-CHT SCREW G67-10-129 (4) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, SURFACE MOUNT BARGMAN 
LEXT-2UL	LAMP 8089-01-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED UL LIST JRV PROD 
LEXT-2CA	LAMP 8089-02-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED CAN LIST JRV PROD 
LEXT-3	LAMP 171513-01-CHT SCREW G67-10-129 (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH SURFACE MOUNT OPTRONICS

87.0

22.2 R

96

CUT OUT IN PANEL

HALOGEN LAMP

LINE SPRING CLIPS UP WITH RELIEF IN CUT OUT

DETAIL CA

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

XXXXXX

XX

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL

SHEET 3

PART NO 121339

REV

DWG NO 121339

96 MH'S

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL





SHEET 3

PART NO 121339





REV



























2/16/2010

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-2	LAMP 137417-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-2	LAMP 137417-04-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-2	LAMP 137417-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-2	LAMP 137417-05-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N2	LAMP 137417-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN2	LAMP 137417-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,HALOGEN



NO	PART NUMBER	DESCRIPTION
HAL	LAMP 123775-01-CHT SCREW (SUPPLIED) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING 1 BULB 
HAL-S	LAMP 123775-01-CHT SPACER 123775-02-CHT SCREW G13-06-16U (3) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING WITH 3/4" SPACER 1 BULB 
HAL-2	LIGHT-HAL,ROUND 165170-01-CHT SCREW G13-06-12B (2) CONNECTOR 58028-01-000 (2)	LIGHT-HALOGEN, ROUND 3" 
HAL-4	LIGHT-HAL,ROUND 165643-01-CHT SCREW G13-05-16B (3) CONNECTOR 58028-01-000 (2) (SEE DETAIL CA)	LIGHT-HALOGEN, ROUND 4.5" 

8			7			6			5			4			3			2			1																													
LAMP ASM-PACKAGE,FLUORESCENT												LAMP ASM-PACKAGE,MAKEUP LAMP												LAMP ASM-PACKAGE,OTHER												LAMP ASM-PACKAGE,PANCAKE												DWG NO 121339		
NO		PART NUMBER				DESCRIPTION						NO		PART NUMBER				DESCRIPTION						NO		PART NUMBER				DESCRIPTION																				
FLU-1		LAMP 91936-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH THIN-LITE 						LMU3-1		LAMP 110235-01-CHT SCREW W/SPACER (SUPPLIED) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB (SUPPLIED) PROGRESSIVE DYNAMICS 						LSH-1		LAMP 121935-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-SHOWER PROGRESSIVE DYNAMICS INC. 						LF1-3		LAMP 170693-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH GUSTAFSON 								
FLU-2		LAMP 91936-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/SWITCH THIN-LITE 						LMM3-2		LAMP 123774-03-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 3 BULB GUSTOFSON 						LSH-2		LAMP 164039-01-CHT SCREW G11-08-16U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER 						LF2-3		LAMP 170693-04-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH GUSTAFSON 								
FLU-3		LAMP 127327-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 1-12" BULB W/SWITCH THIN-LITE 						LMU3-2		LAMP 138116-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 						LSH-3		LAMP 164040-01-CHT SCREW G13-07-12U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER GLASS 						LO1-3		LAMP 170693-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH GUSTAFSON 								
FLU-4		LAMP 130338-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT W/SWITCH THIN-LITE 						LMU3-3		LAMP 162446-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 						LCR-1		LAMP 61424-01-000 SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE RAMCO (RECTANGULAR) 						L02-3		LAMP 170693-05-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH GUSTAFSON 								
FLU-5		LAMP 153464-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336						LMU4-1		LAMP 110235-02-CHT SCREW G11-08-16U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB PROGRESSIVE DYNAMICS 						LCS-1		LAMP 108354-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE ITC MARINE (SQUARE) 						LF1N3		LAMP 170693-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH GUSTAFSON 								
FLU-6		LAMP 130338-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT WARM WHITE BULB W/SWITCH THIN-LITE 						LMU4-2		LAMP 138116-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 						READ-1		LIGHT-READING 132427-01-CHT SCREW SUPPLIED W/ LIGHT CLIP-U 141395-02-CHT (2) CONNECTOR 58028-01-000 (2)				LIGHT-READING,SWIVEL,ROUND 1 BULB 						LFSN3		LAMP 170693-06-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH GUSTAFSON 								
FLU-7		LAMP 153464-05-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336						LMU4-3		LAMP 162446-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 						READ-2		LIGHT-READING 128786-02-CHT SCREW G11-08-16J (2) BULB 123917-01-000 CONNECTOR 58028-01-000 (2)				LIGHT,READING,SWIVEL 						LOS3		LAMP 170693-07-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 2 BULB W/O SWITCH GUSTAFSON 								
FLU-8		LAMP 173072-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" ONE 8 WATT BULB W/SWITCH OPTRONICS 						LMM4-2		LAMP 123774-01-CHT SCREW G11-08-16U (2) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 4 BULB GUSTOFSON 						READ-3		LIGHT-READING 170833-01-CHT SCREW SUPPLIED W/LIGHT CONNECTOR 58028-01-000 (2)				LIGHT,READING,HAL 						LO1N3		LAMP 170693-08-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 1 BULB W/O SWITCH GUSTAFSON 								
FLUN1		LAMP 91936-04-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH THIN-LITE 																																												
FLUN2		LAMP 91936-03-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH THIN-LITE 																																												
FLUN3		LAMP 153464-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336																																												
FLUN4		LAMP 153464-03-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 480																																												
FLUN5		LAMP 153464-06-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 480																																												
FLUN6		LAMP 153464-04-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336																																												



87654321

DWG NO121339






RECEPTACLE PACKAGE-GFI

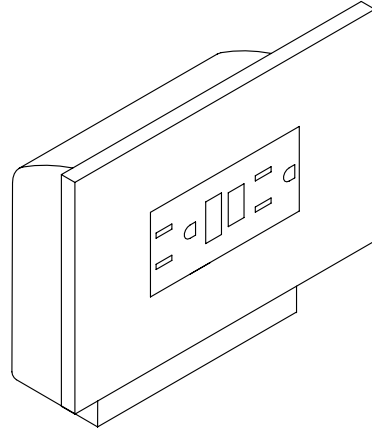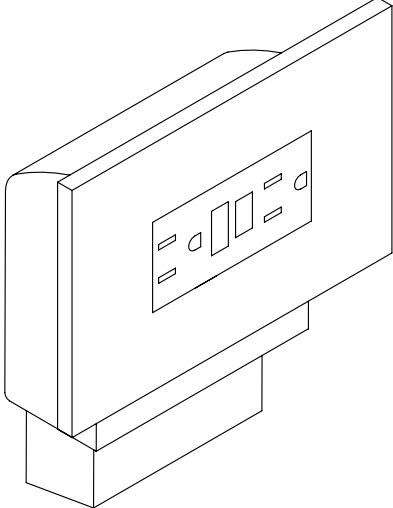NO	PART NUMBER	DESCRIPTION
<u>GFI</u> US	RECEPTACLE 163319-01-CHT BOX 91910-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI</u> CAN	RECEPTACLE 163319-01-CHT BOX 91910-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

RECEPTACLE PACKAGE-GFI

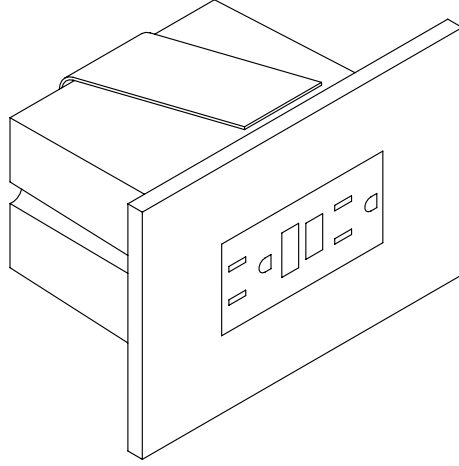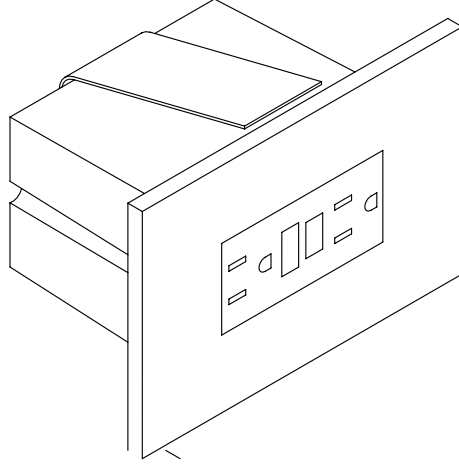
NO	PART NUMBER	DESCRIPTION
<u>GFI-1</u> US	RECEPTACLE 163319-01-CHT BOX 133070-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI-1</u> CAN	RECEPTACLE 163319-01-CHT BOX 133070-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

SPACERS

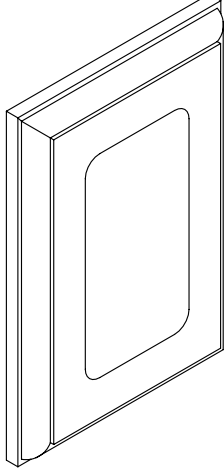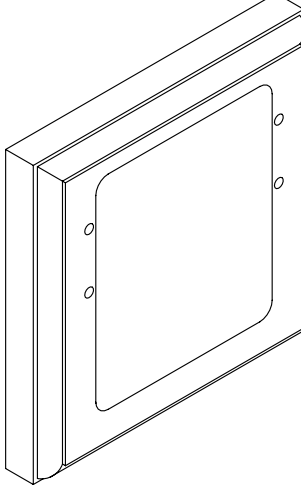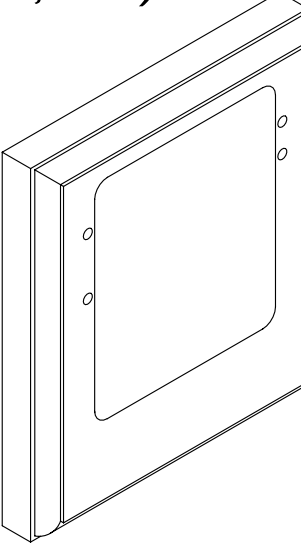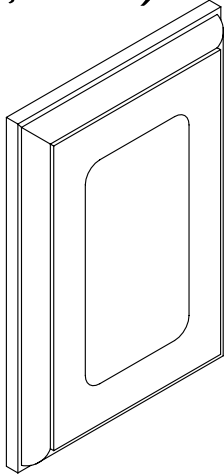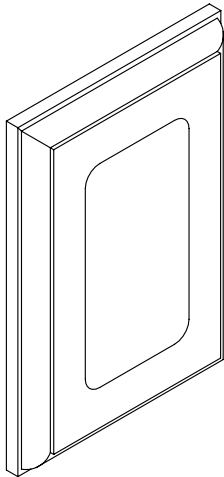NO	PART NUMBER	DESCRIPTION
SP-01	SPACER 102568-01-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,OG) 
SP-02	SPACER 102568-02-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (US) (WOOD,VYL RAP,OG) 
SP-03	SPACER 102568-03-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (CANADA) (WOOD,VYL RAP,OG) 
SP-04	SPACER 133713-01-CHT	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,BEV) 
SP-05	SPACER 133713-20-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,BEV) 

SP-21

SPACER
126052-01-XXX

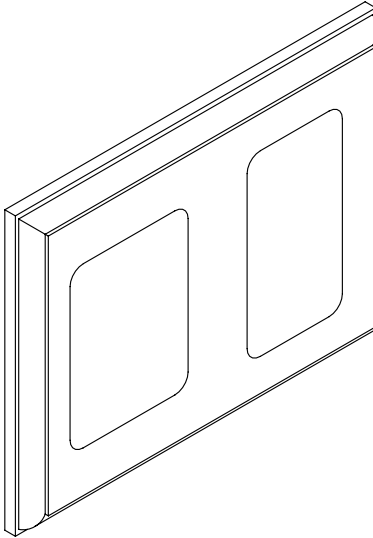WOOD SPACER FOR 1 - 110V
RECEPTACLE AND 1 - REAR TV
(12V) JACK
(WOOD,BEV)


LEGEND

MISC.	SPACER
PART NUMBER LISTING XXXX XXX	XXXX PART NUMBER

NOTES:

1

APPLY TUBING TO BARE GROUND WIRES.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 6

PART NO121339

REV



2/16/2010

87654321


121339

DWG NO


PREP-A/C, RECESSED (W/OUT FACTORY A/C)

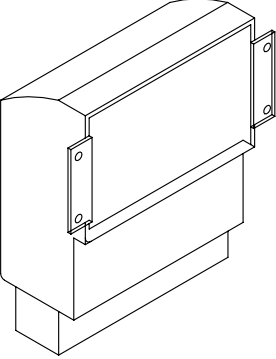NO	PART NUMBER	DESCRIPTION
PREP A/C-US	BOX 91910-02-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). US APPLICATION (RECESSED IN ROOF) 
PREP A/C-CAN	BOX 91910-01-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). CANADA APPLICATION (RECESSED IN ROOF) 


CONNECTION BOX-POWER CORD

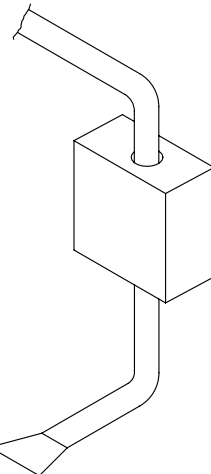NO	PART NUMBER	DESCRIPTION
J-PC 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 CONNECTOR 8314-01-000 (3) CONNECTOR 8356-02-000 CONNECTOR (PC) 8355-01-000	CONNECTION BOX IN POWER CORD COMPT FOR POWER CORD (US & CA APPLICATION) 
J-PC 30-US		
J-PC 30-CA		


CONNECTION BOX-GENERATOR RECEPTACLE

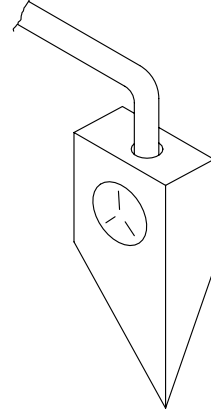NO	PART NUMBER	DESCRIPTION
J-RCP 30	BOX 8289-01-000 RECEPTACLE 24924-02-000 COVER 69238-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 133678-04-000 CONNECTOR 8314-01-000 TUBING-VINYL 8041-02-000 (150MM)	CONNECTION BOX IN POWER CORD COMPT FOR THE GENERATOR RECEPTACLE (US & CA APPLICATION) 
J-RCP 30-US		
J-RCP 30-CA		

CONNECTION BOX, GENERATOR SERVICE FEED

NO	PART NUMBER	DESCRIPTION
J-GEN 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 WIRE NUT-GREY 8314-01-000 (3) CONNECTOR-WIRE 8356-01-000	BOX AND EQUIPMENT USED FOR CONNECTING THE GENERATOR LEADS TO THE SERVICE ENTRANCE WIRES (US & CA APPLICATION) 
J-GEN 30-US		
J-GEN 30-CA		

PREP-A/C, SURFACE (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP SURF	BOX 93603-01-000 COVER 53337-01-000 LABEL 91243-01-000 WIRE-BONDING 8019-01-000 SCREW G11-08-12B (2) TERMINAL 8328-01-000 CONNECTOR 8313-01-000 (2) CONNECTOR 8311-01-000	SURFACE MOUNT, US AND CANADA, BOX AND EQUIPMENT FOR A/C PREP (W/OUT FACTORY A/C). TYPICALLY LOCATED ON OVERHEAD CABINET INNER WALL OR ON CEILING. 

LEGEND

PART NUMBER

XXXX

LISTING

XX

NOTES:

1 APPLY TUBING TO BARE GROUND WIRES.

96 MH'S

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL

SHEET 7


PART NO 121339

REV

87654321

121339

2/16/2010

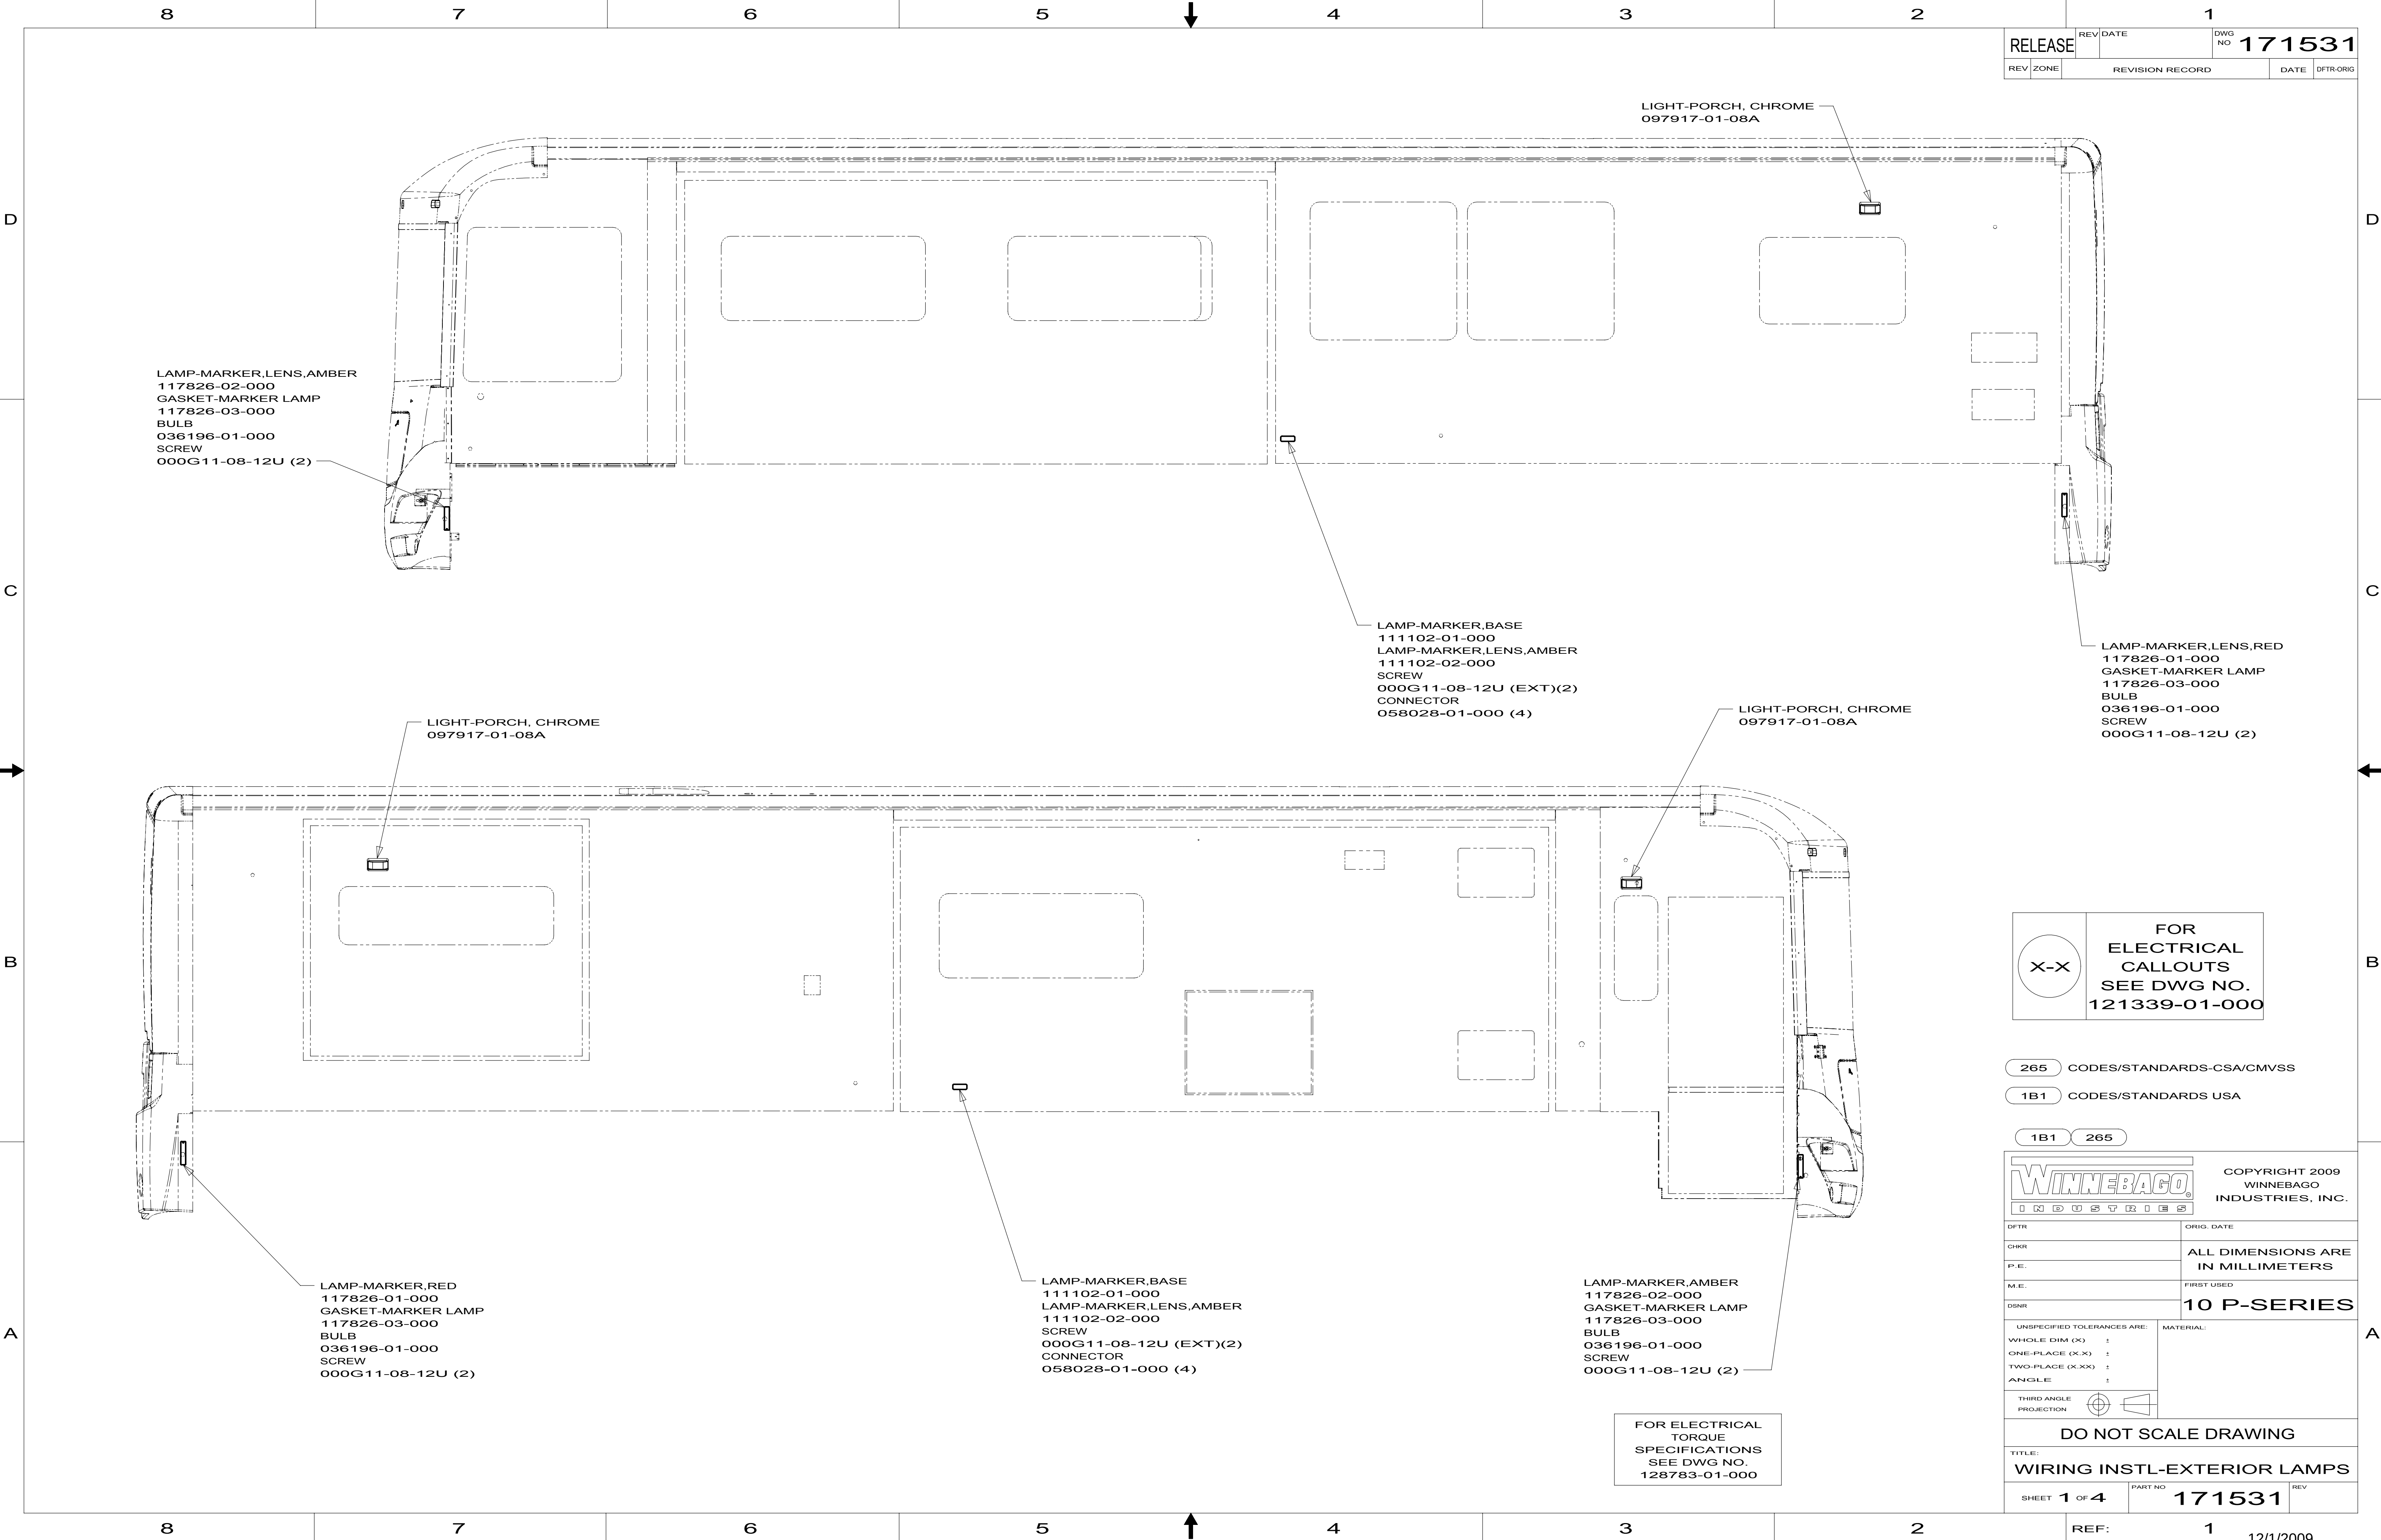

RELEASE		REV	DATE	DWG NO	171531	
REV	ZONE	REVISION RECORD			DATE	DTR-ORIG

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA


1B1 265



COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

DTR		ORIG. DATE	
CHKR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
M.E.		10 P-SERIES	
DSNR			
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ±			
ONE-PLACE (X.X) ±			
TWO-PLACE (X.XX) ±			
ANGLE ±			
THIRD ANGLE PROJECTION			

TITLE: WIRING INSTL-EXTERIOR LAMPS		
SHEET 1 OF 4	PART NO 171531	REV

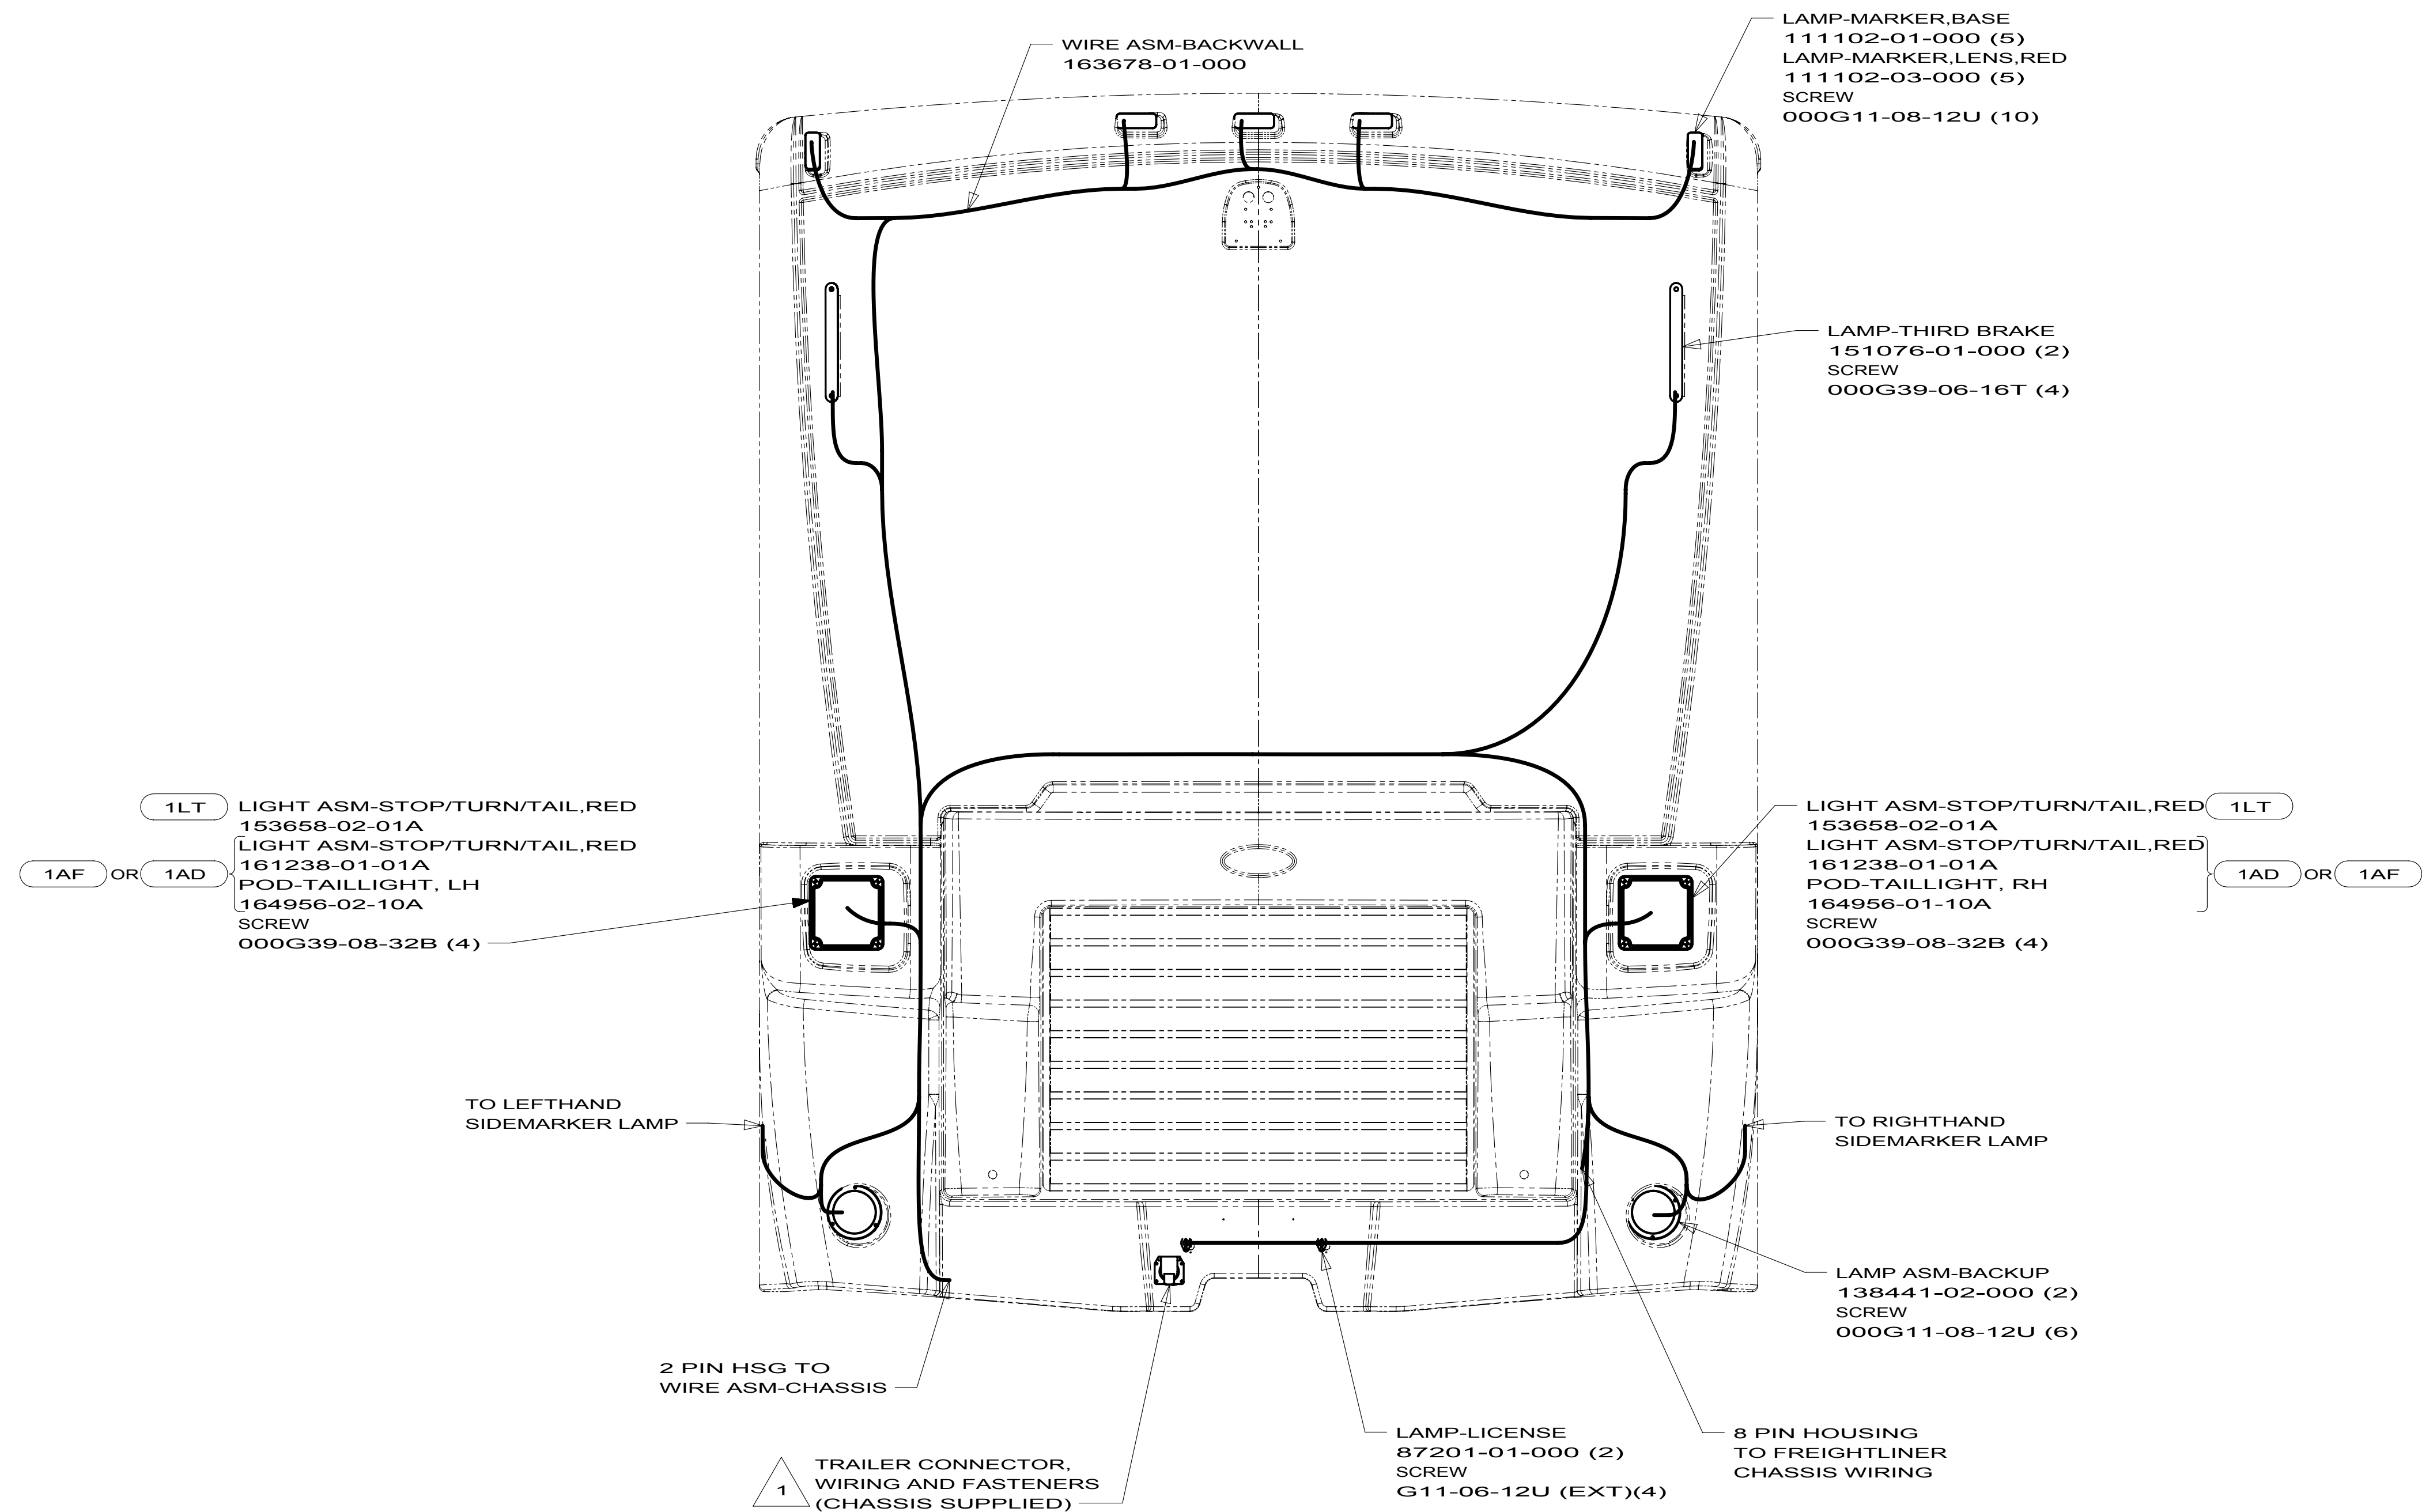

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	---

1LT	FRTL 27,910 340 6.7L 6 SPEED
1AF	FRTL 32,350 360HP 8.3L 6-SPD
1AD	FRTL 31,000 360HP 8.3L 6-SPD
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA

1B1 265

10 P-SERIES

DO NOT SCALE DRAWING

TITLE:


WIRING INSTL-EXTERIOR LAMPS

SHEET 2	PART NO 171531	REV
---------	--------------------------	-----

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

1 CONNECTOR-PLUG,TRAILER (146246-01-000) TO BE SUPPLIED IN COACH.

NOTES:

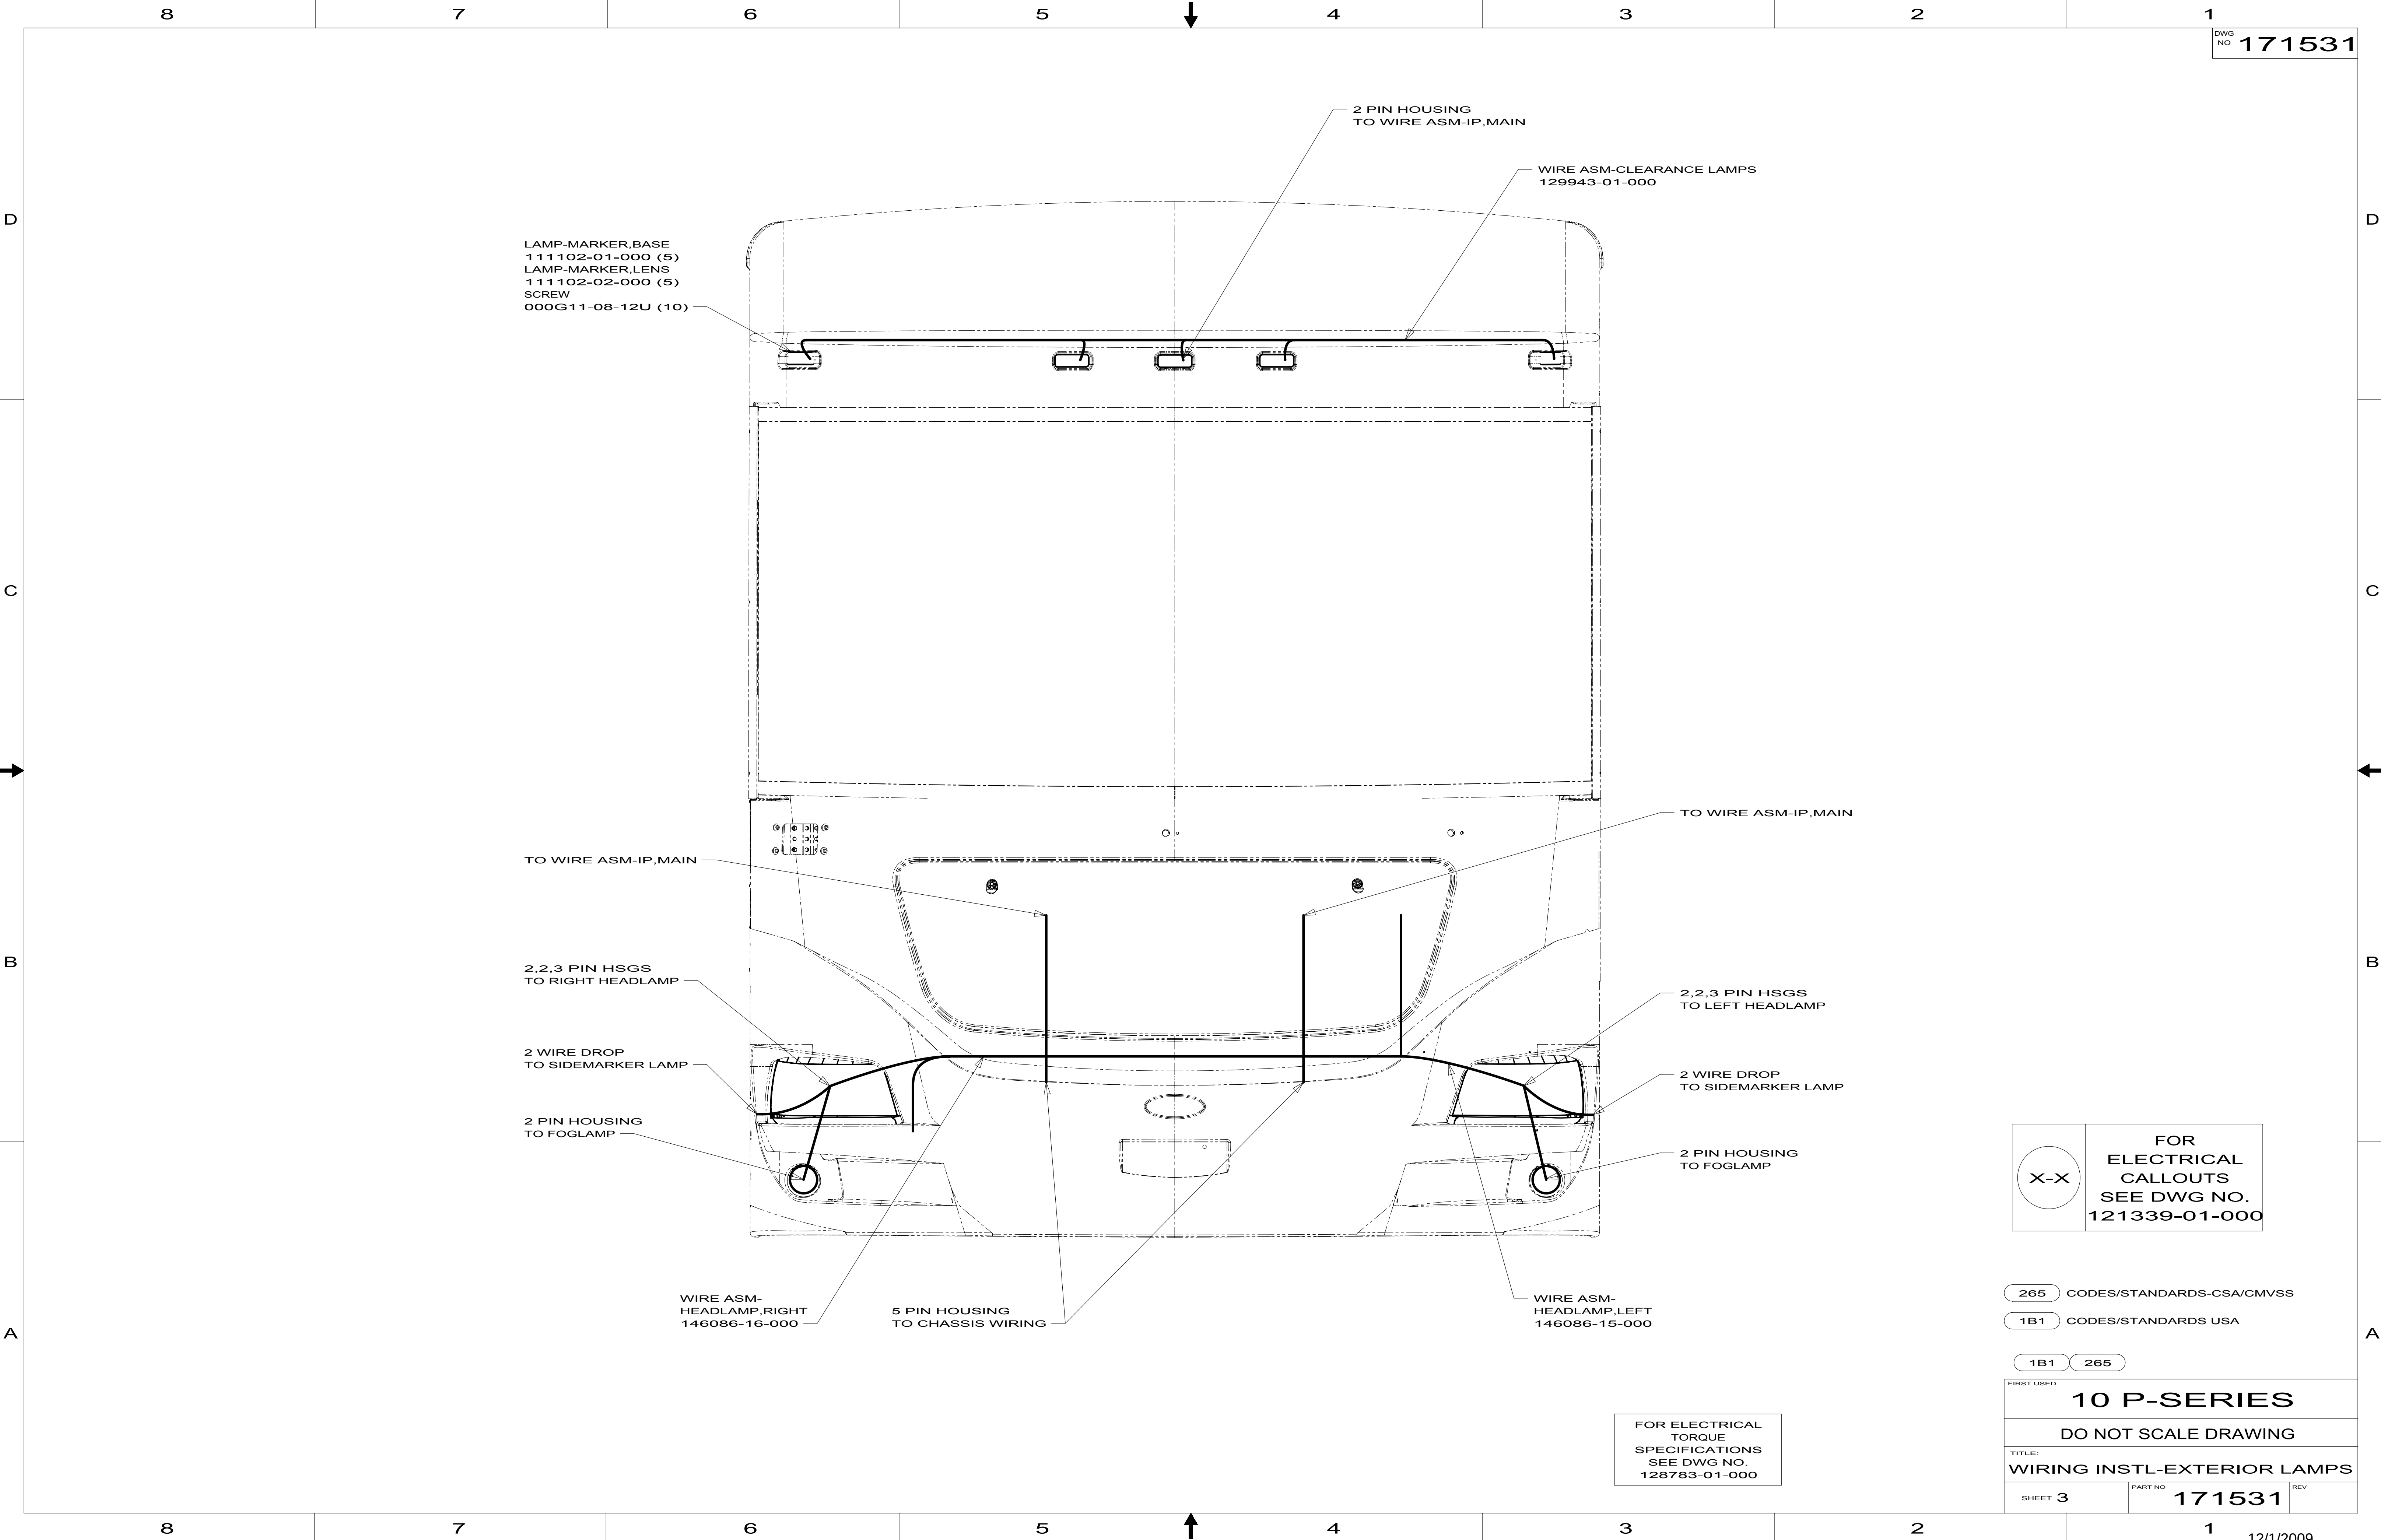

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-EXTERIOR LAMPS		
SHEET 3	PART NO. 171531	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

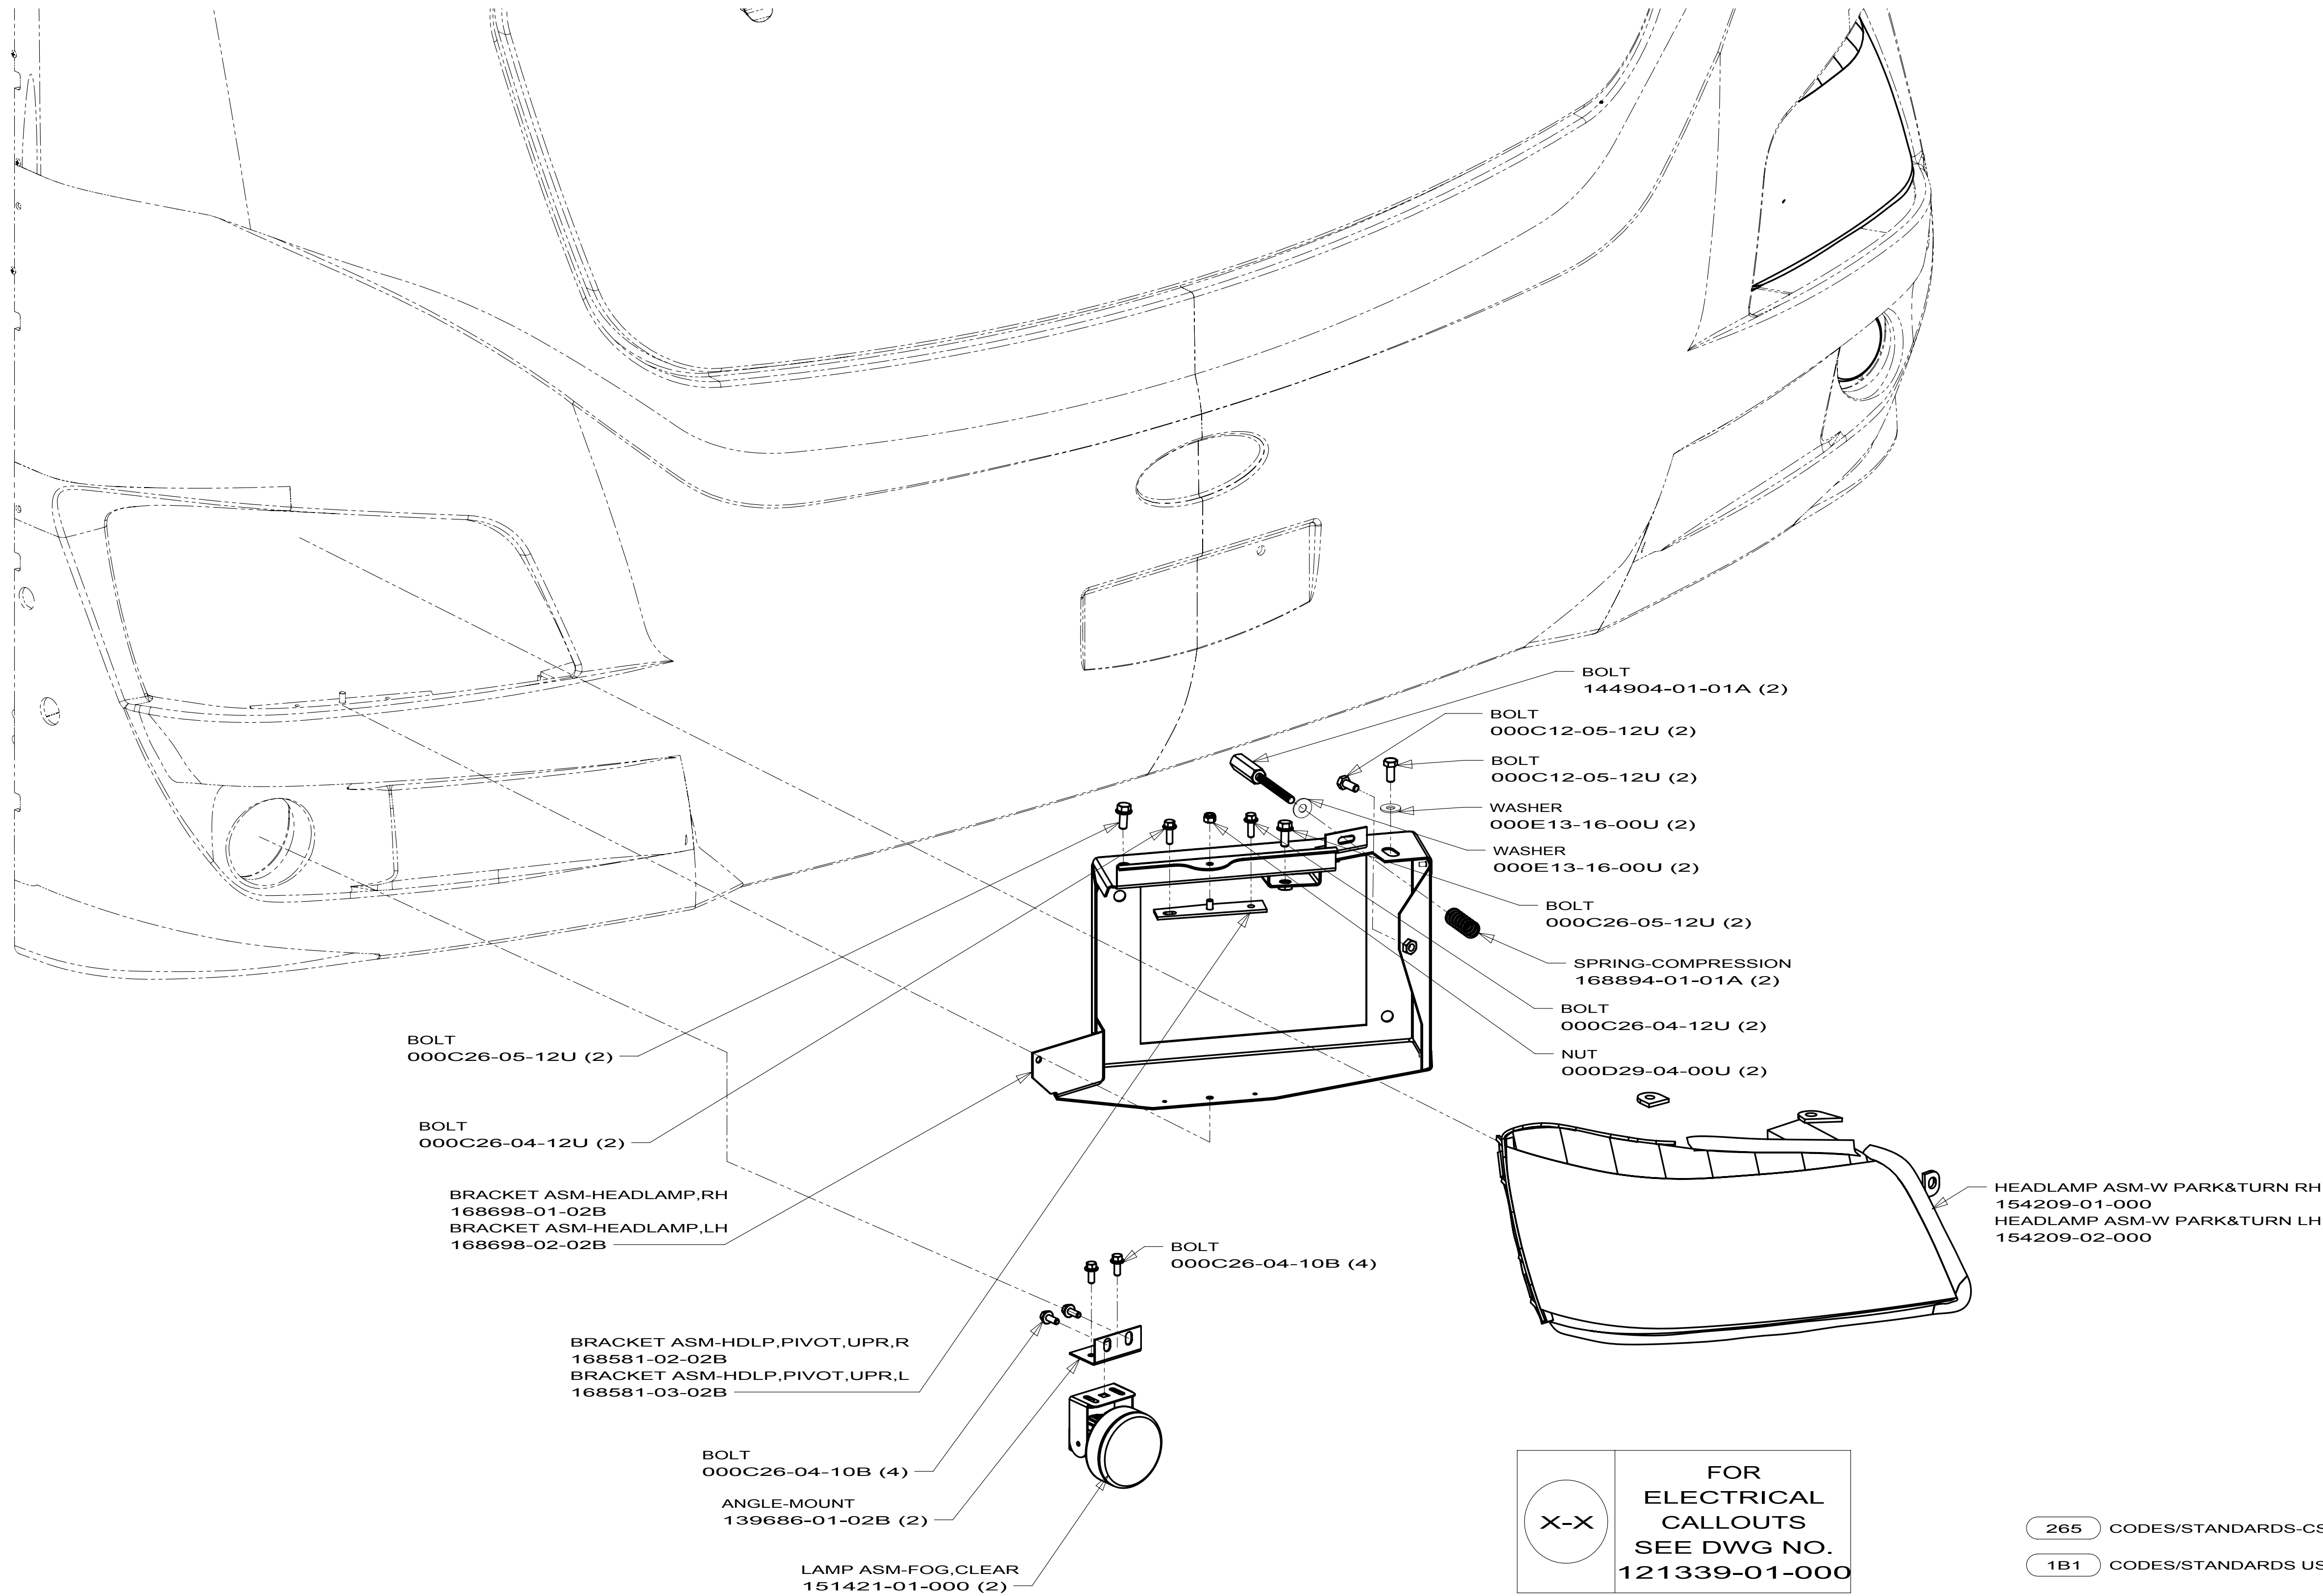

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265


FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-EXTERIOR LAMPS		
SHEET 4	PART NO. 171531	REV

KEY	PART NUMBER	U/M	DESCRIPTION
	097917-01-700	EA	LENS-LIGHT, CLEAR


097917-01-08A/09A
VENDOR NO.
30-78-021

KEY	PART NUMBER	U/M	DESCRIPTION
	153658-01-700	EA	LENS ONLY

153658-01-01A, 153658-01-02A
VENDOR NO.
8511LRC

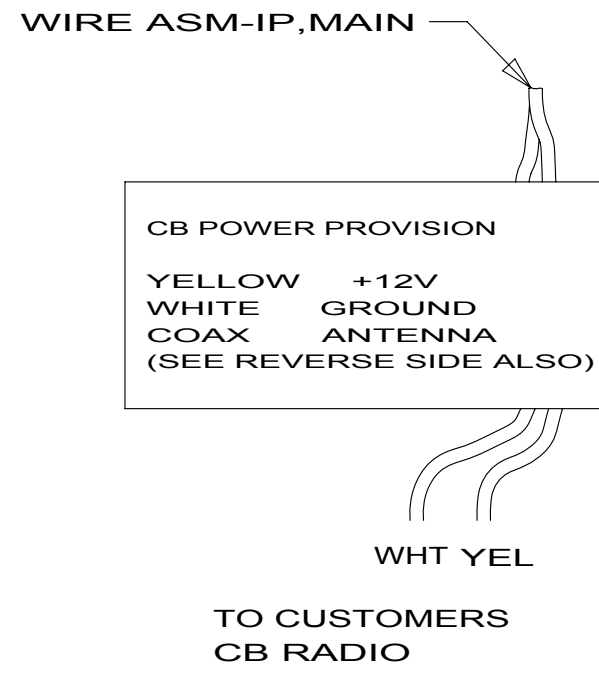

LABEL-CB PREP OPTION
104678-01-000



DETAIL BB 579

1 2 PIN HOUSING
(2) BUTT SPLICES

ALARM-JACKS DOWN
160876-01-000

(2) BUTT SPLICES
TO CB PREP
DETAIL BB
(51 BUTT SPLICES
TO BRAKE CONTROLLER)
DETAIL BC

RING TERMINALS
TO GROUND STUD

3 PIN HOUSING
TO WIRE ASM-REAR MONITOR

2 & 6 PIN HOUSINGS
TO LEFT MIRROR

BUTT SPLICE
SPADE TERMINAL
TO 12V RCP

TO SWITCHES
DETAIL EB

9 PIN HSG
TO WIRE ASM-IP,LEFT

2 & 6 PIN HOUSINGS
TO HEATER/AC CONTROLS

15 PIN HSG
TO WIRE ASM-IP,RIGHT

15 PIN HSG
TO WIRE ASM-IP,POD

TO RADIO WIRING

DETAIL BA

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

579 RADIO - CB WIRE PREP

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265


FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 2	PART NO 170221	REV


2 EDGE OF LABEL TO HANG JUST BELOW BOTTOM OF DASH.

1 ROUTE WIRES UP LEFT A-PILLAR.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

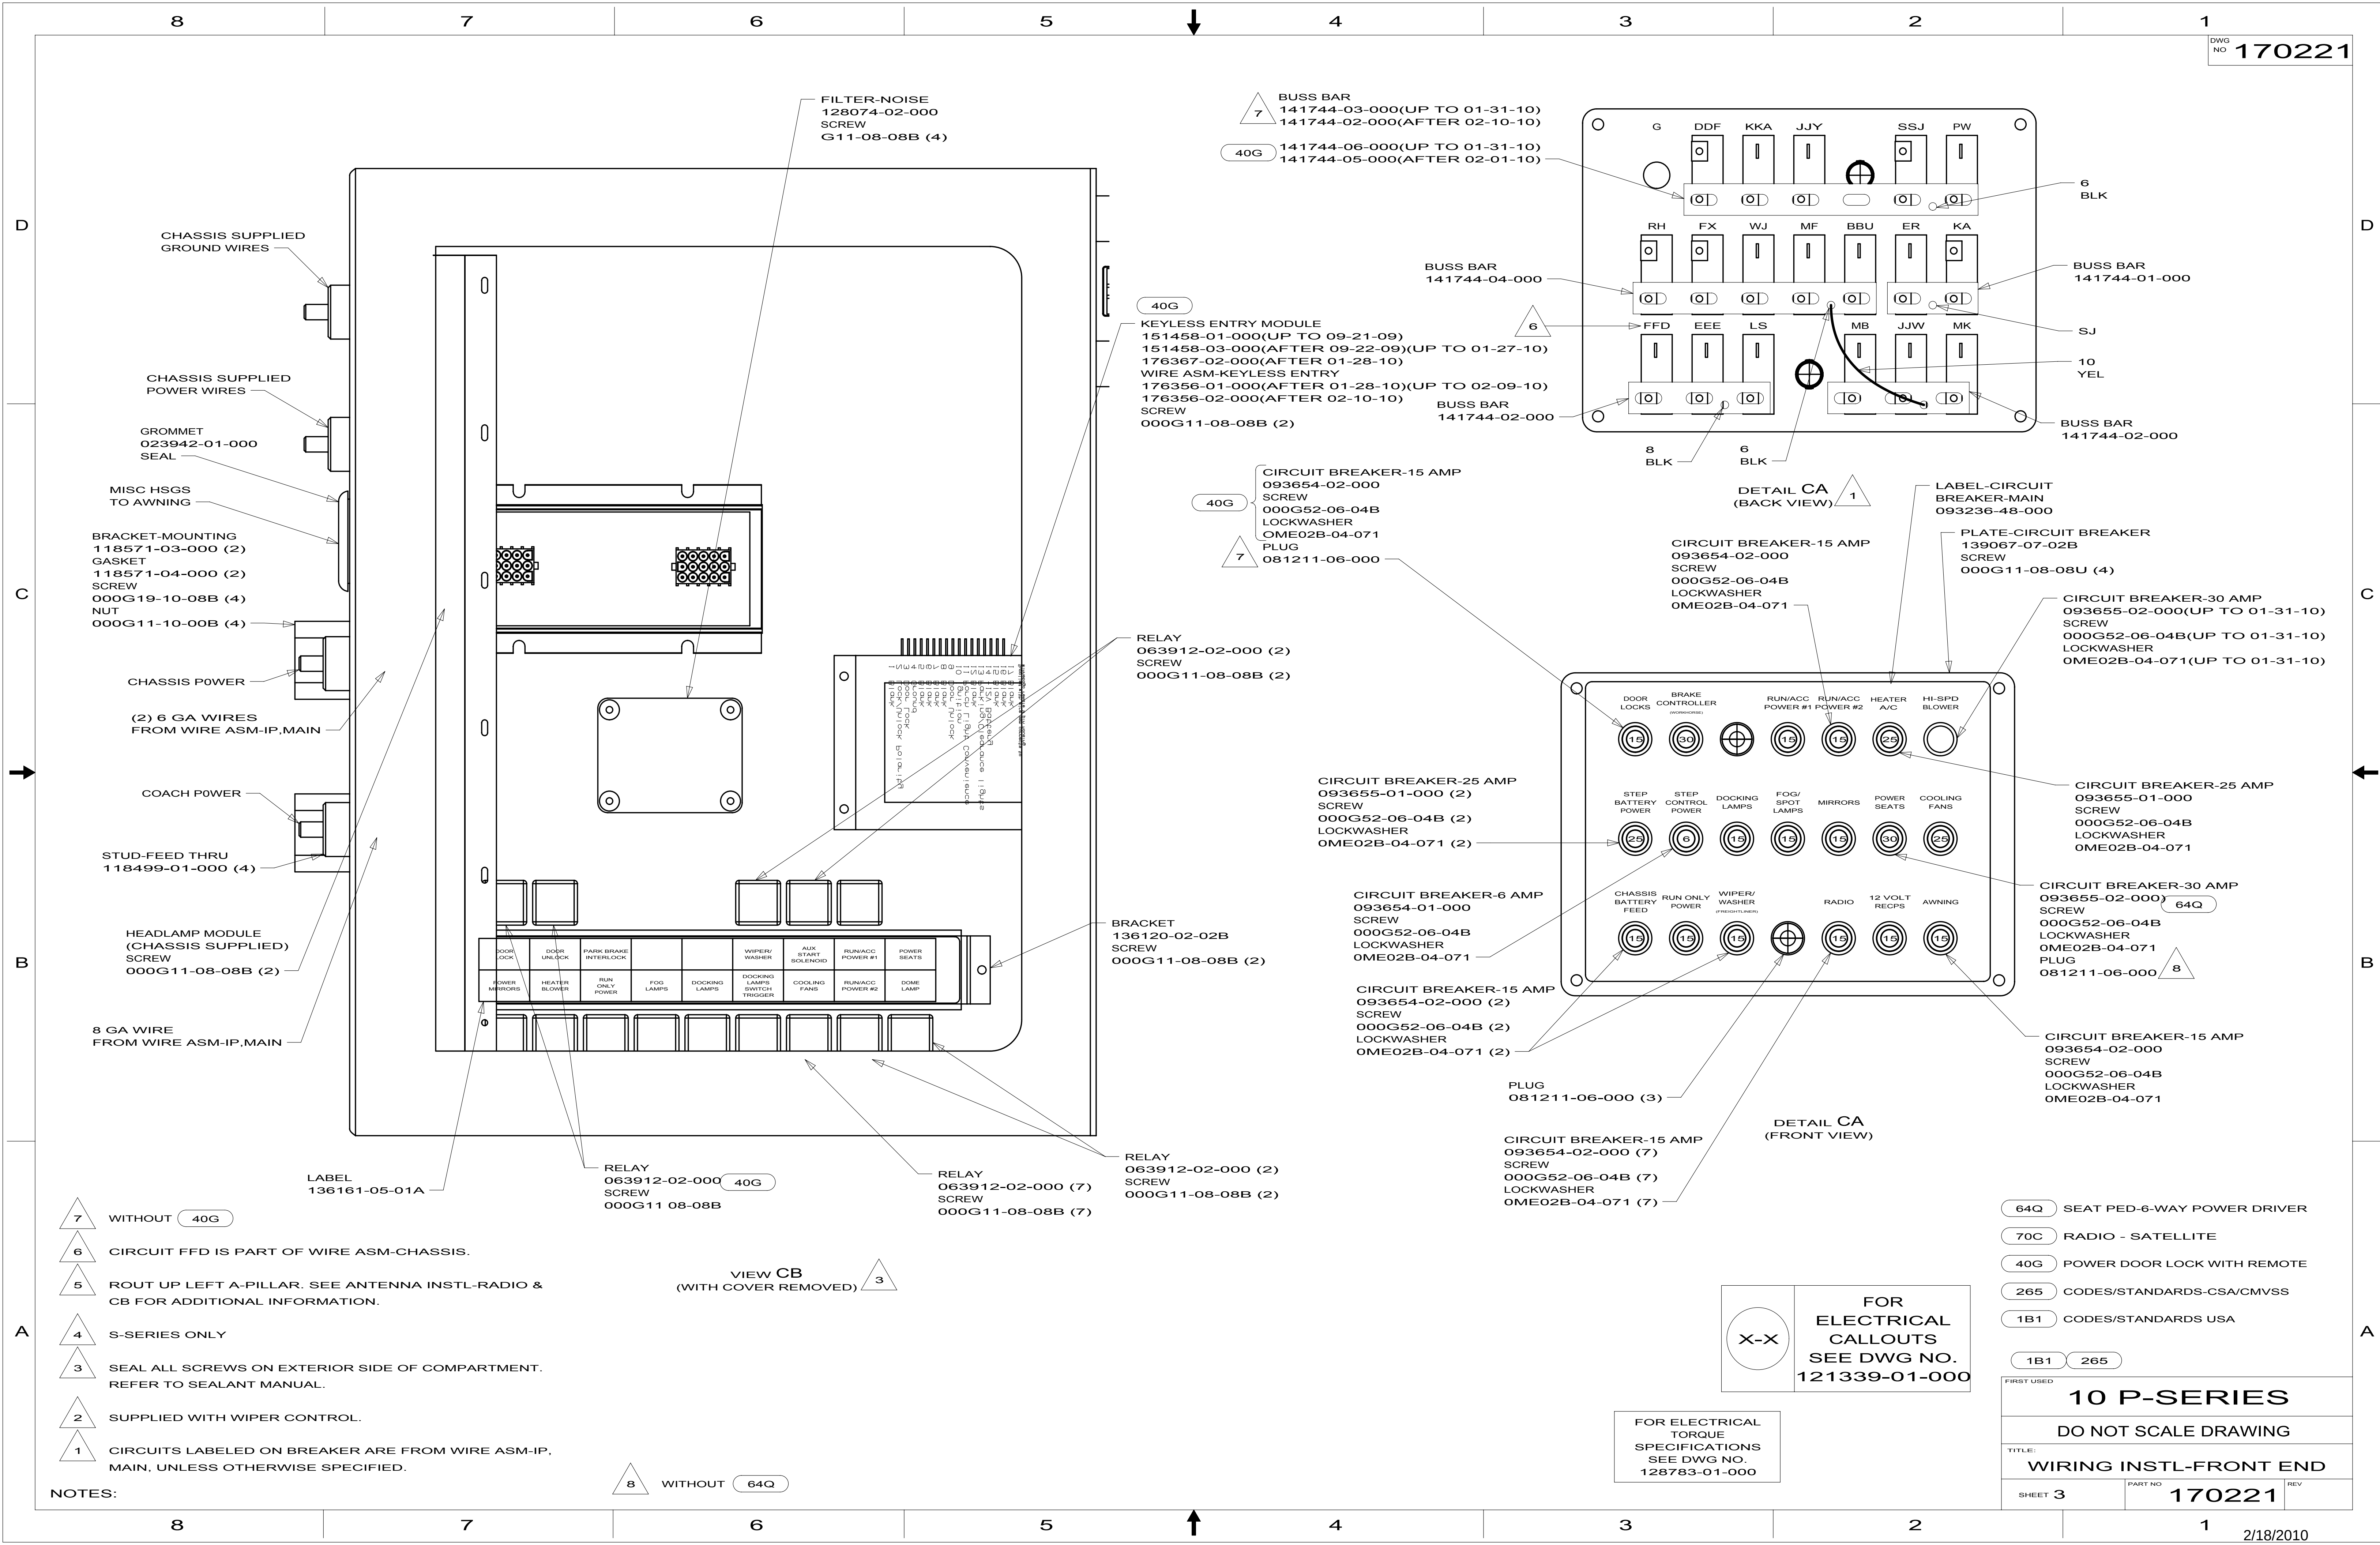

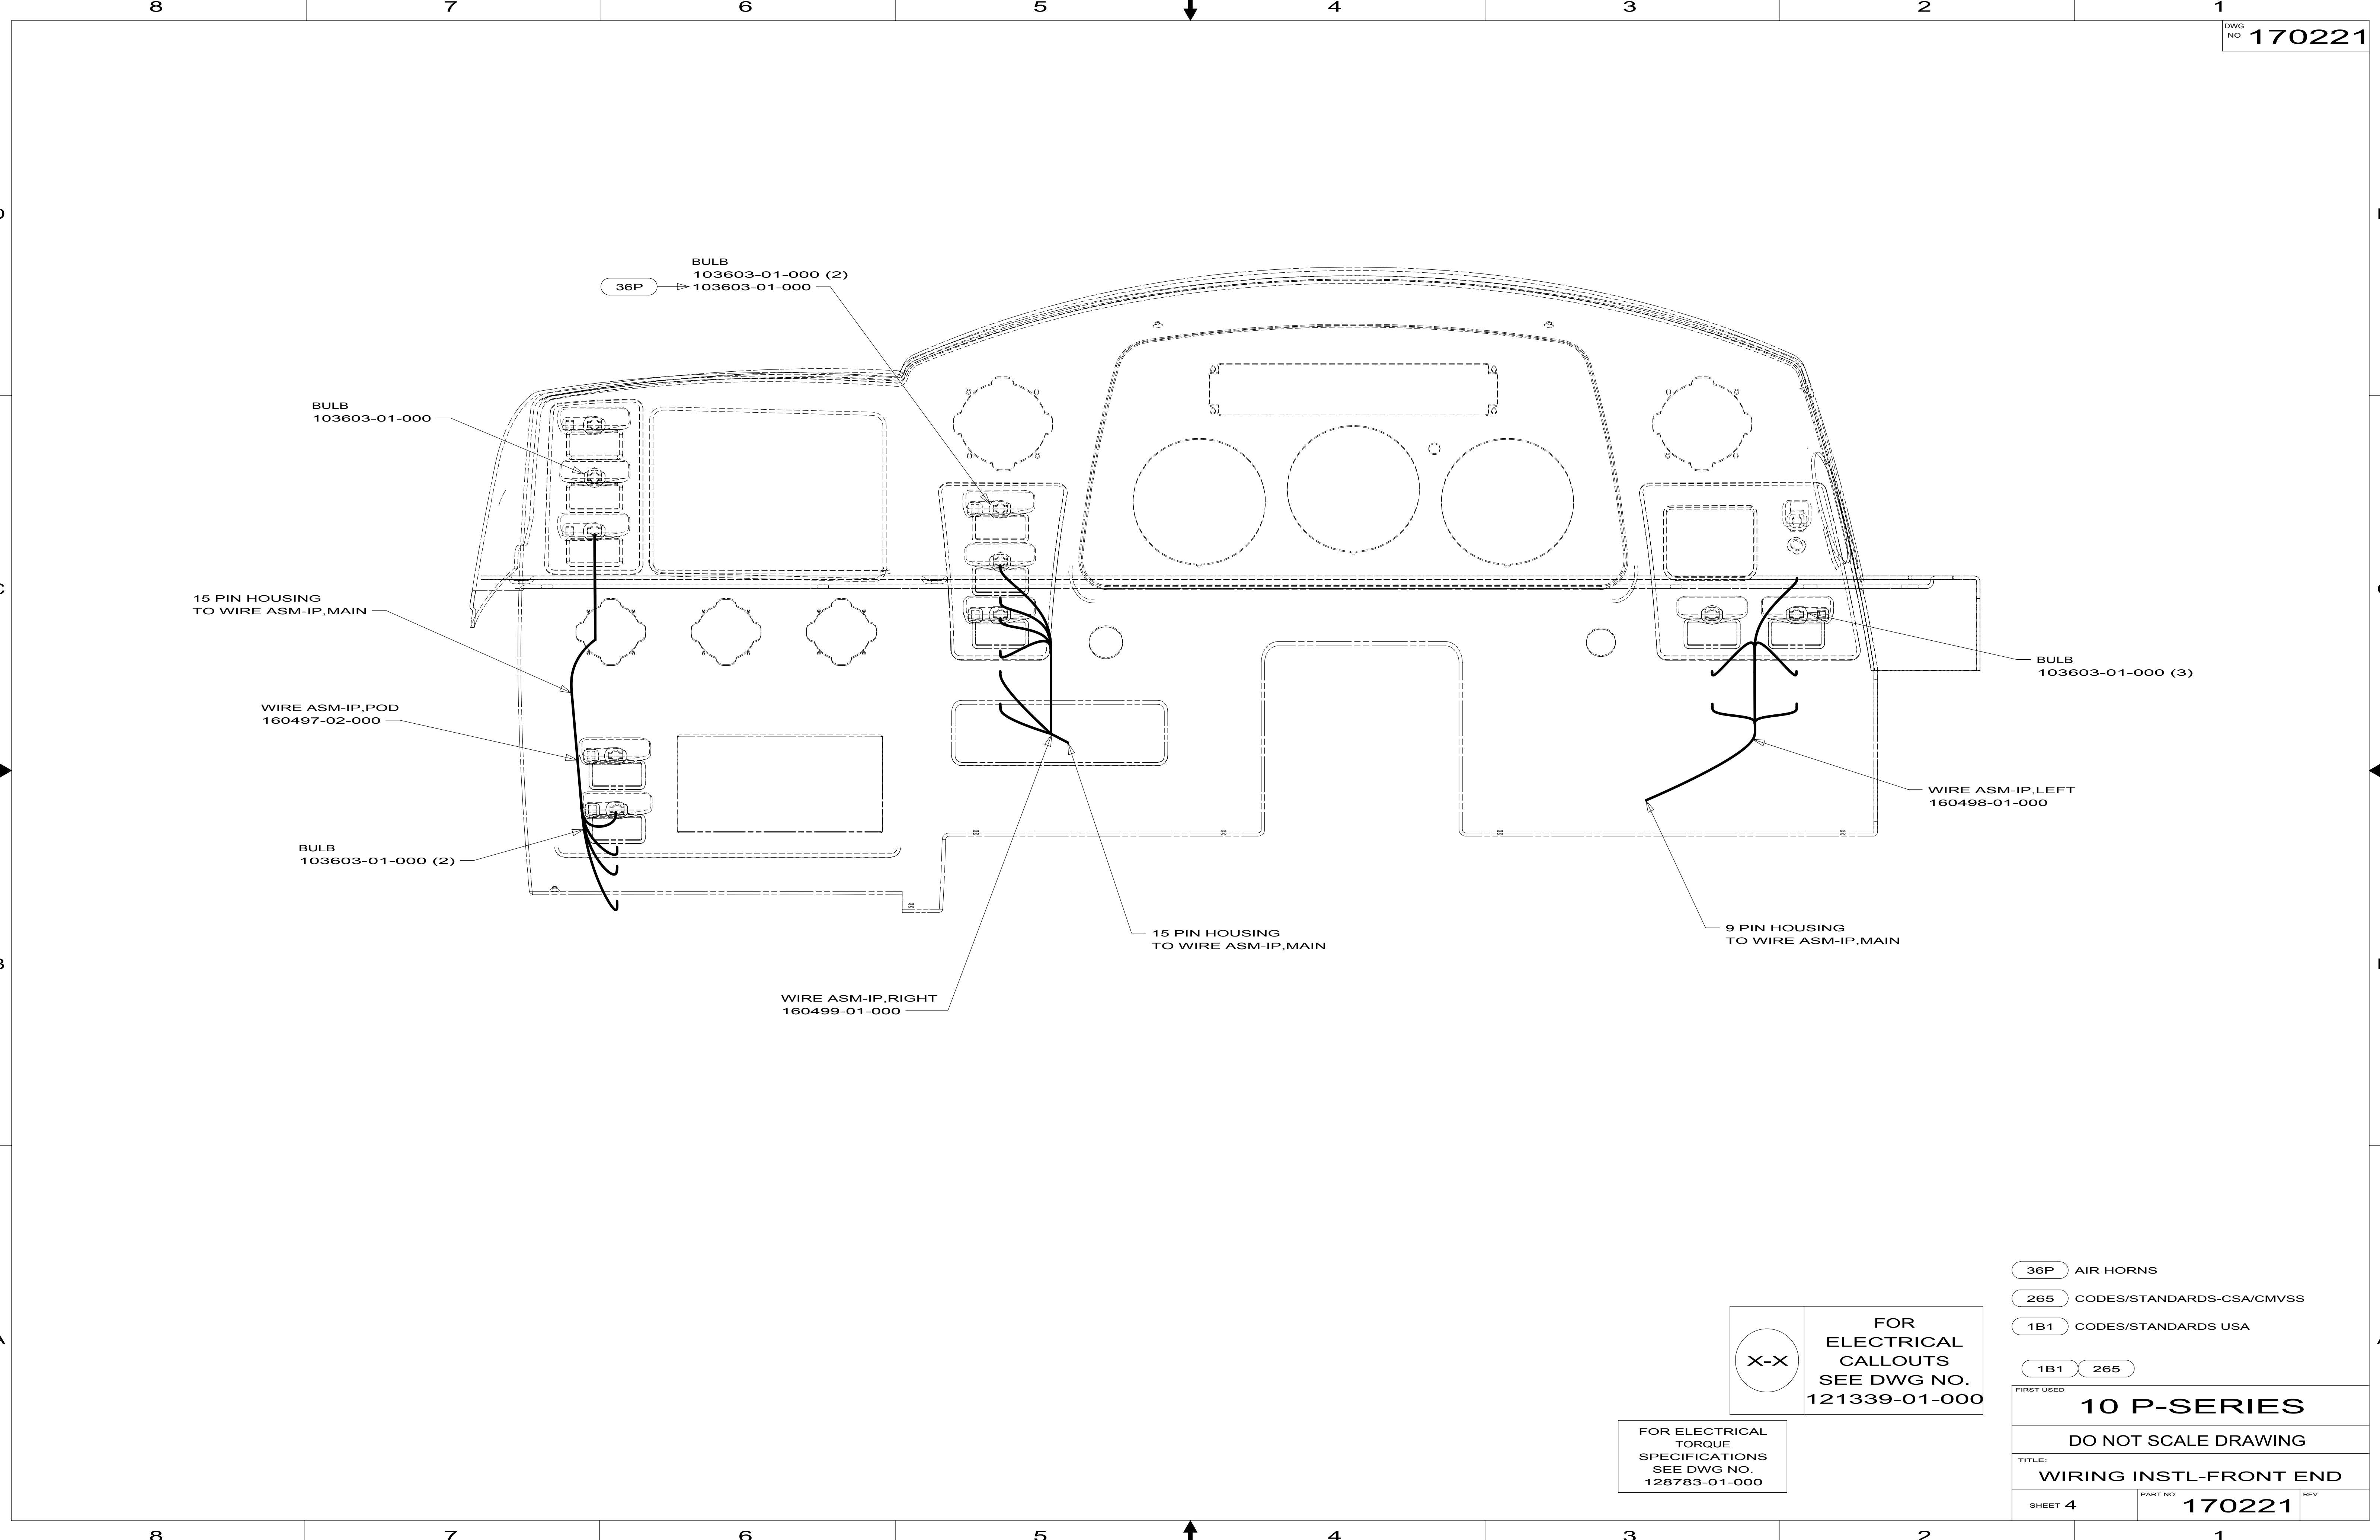



FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- 36P AIR HORNS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 4	PART NO 170221	REV

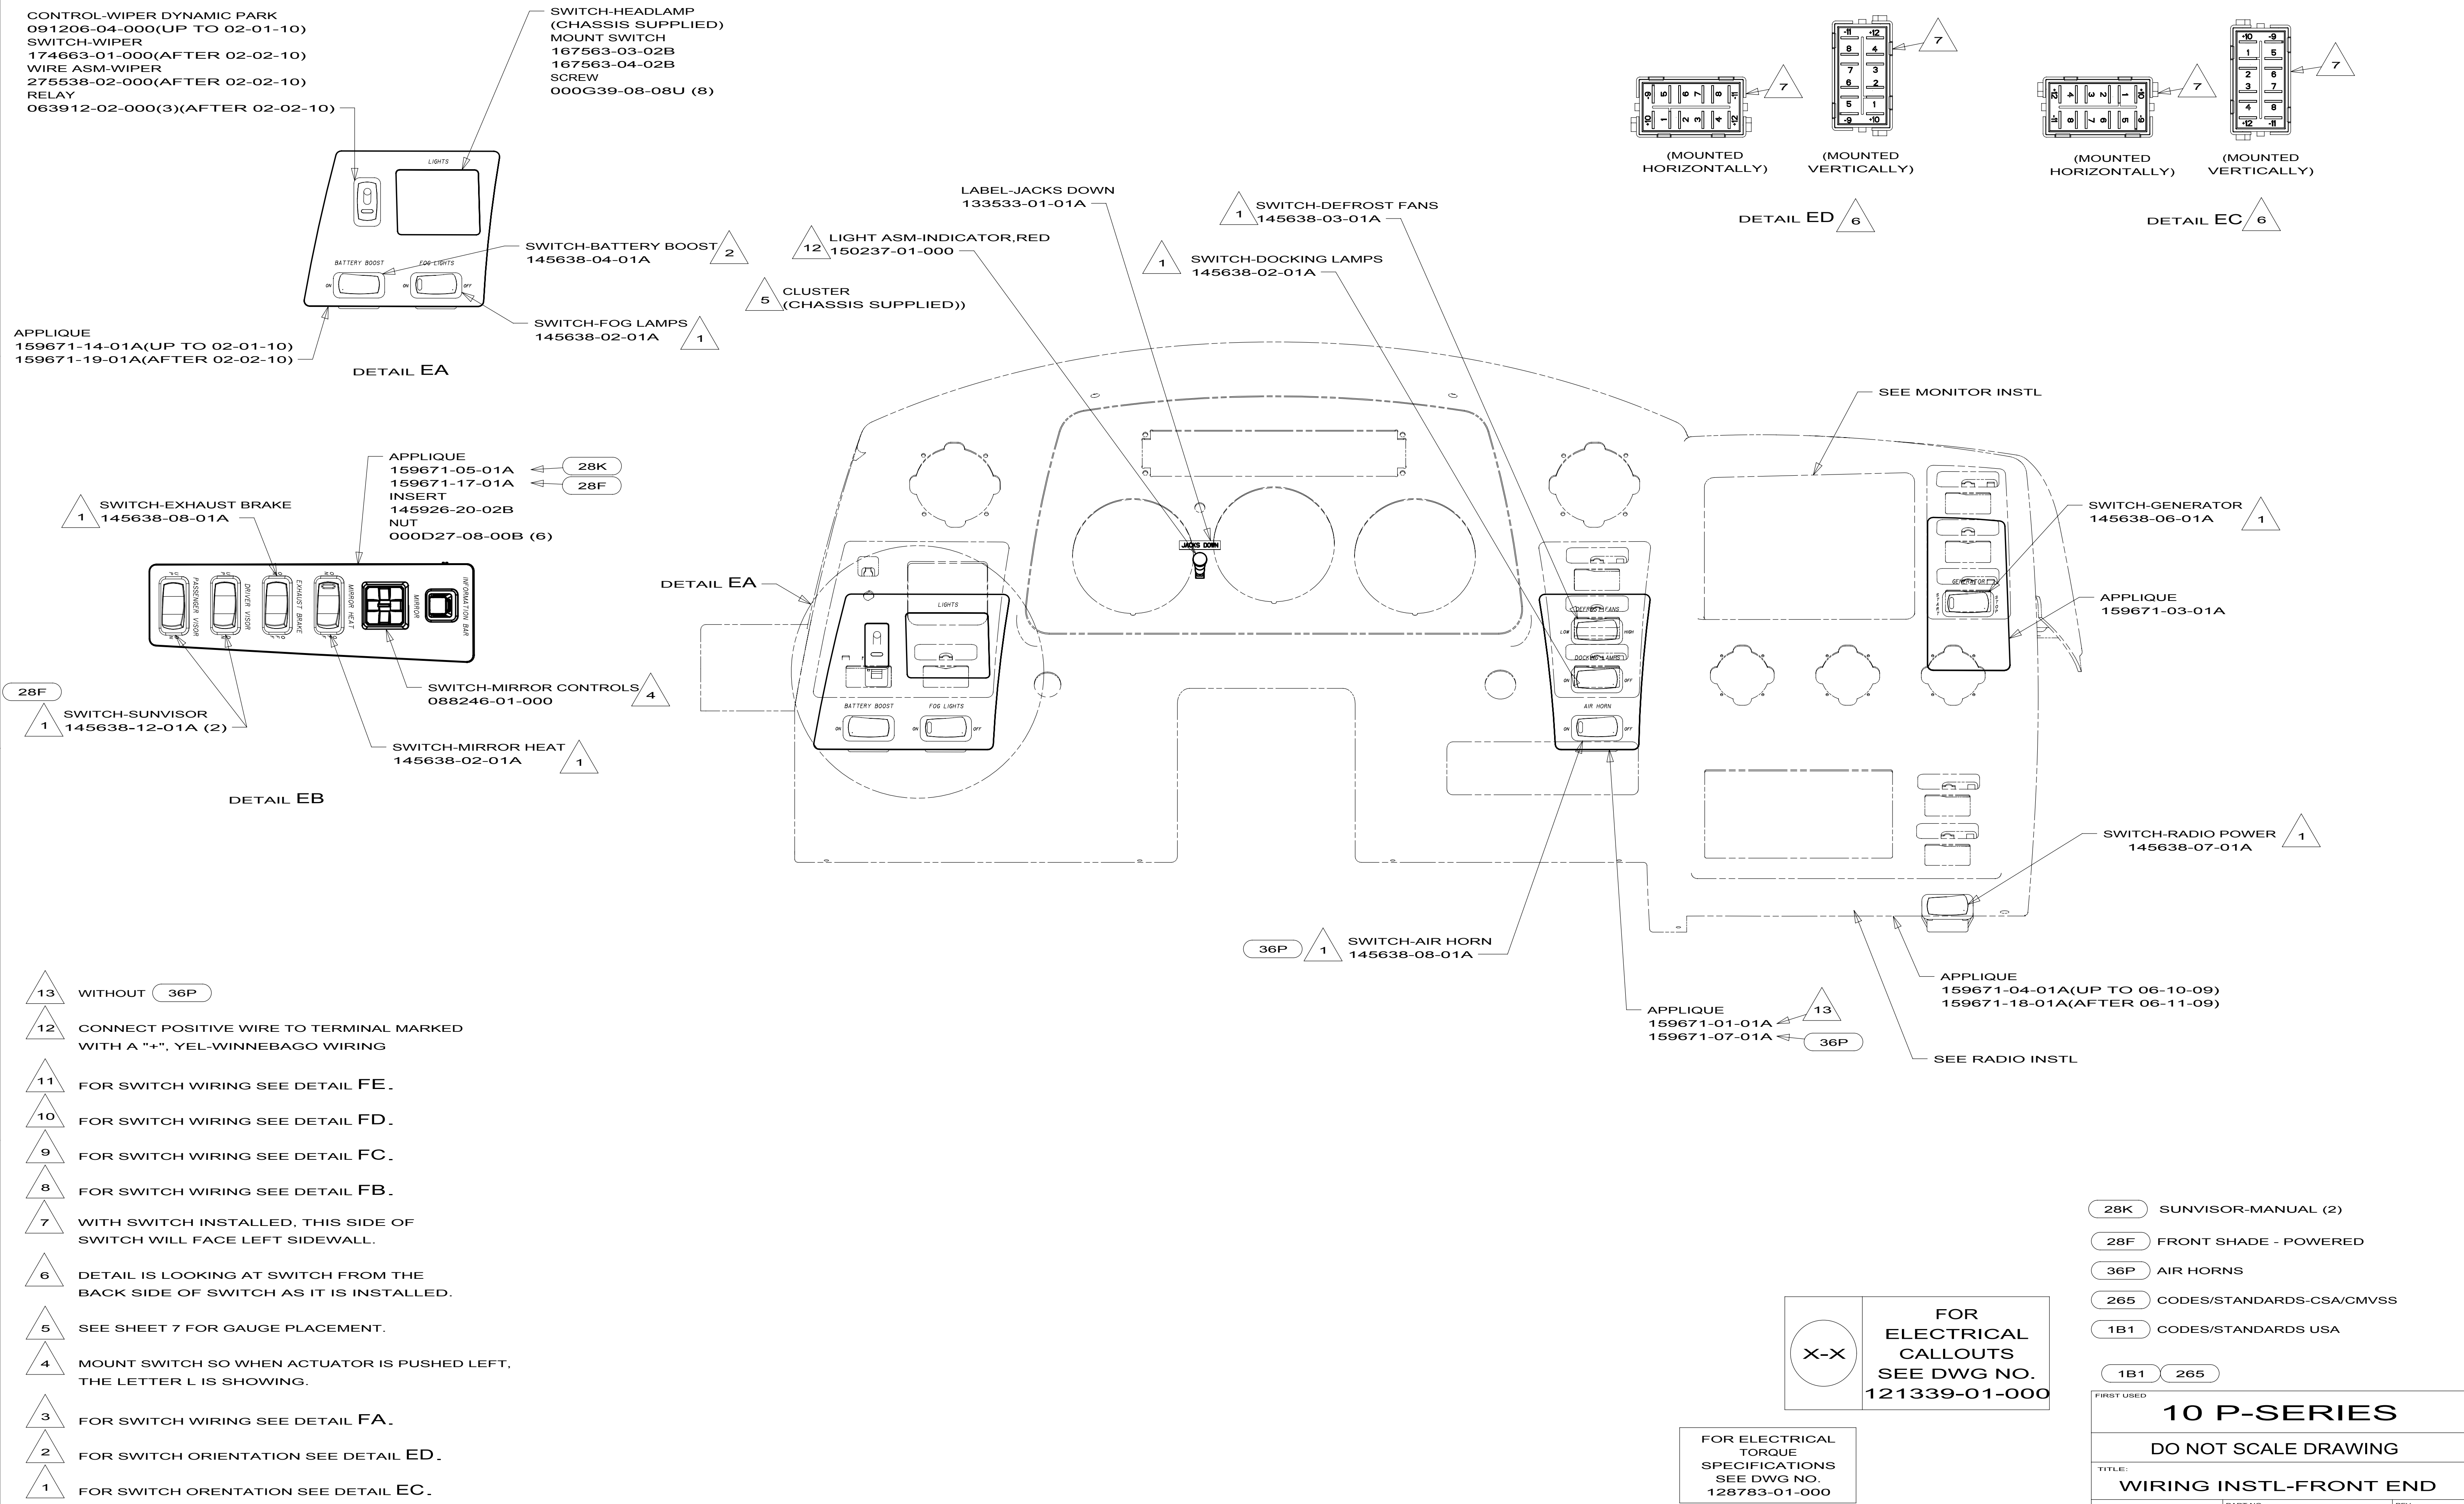

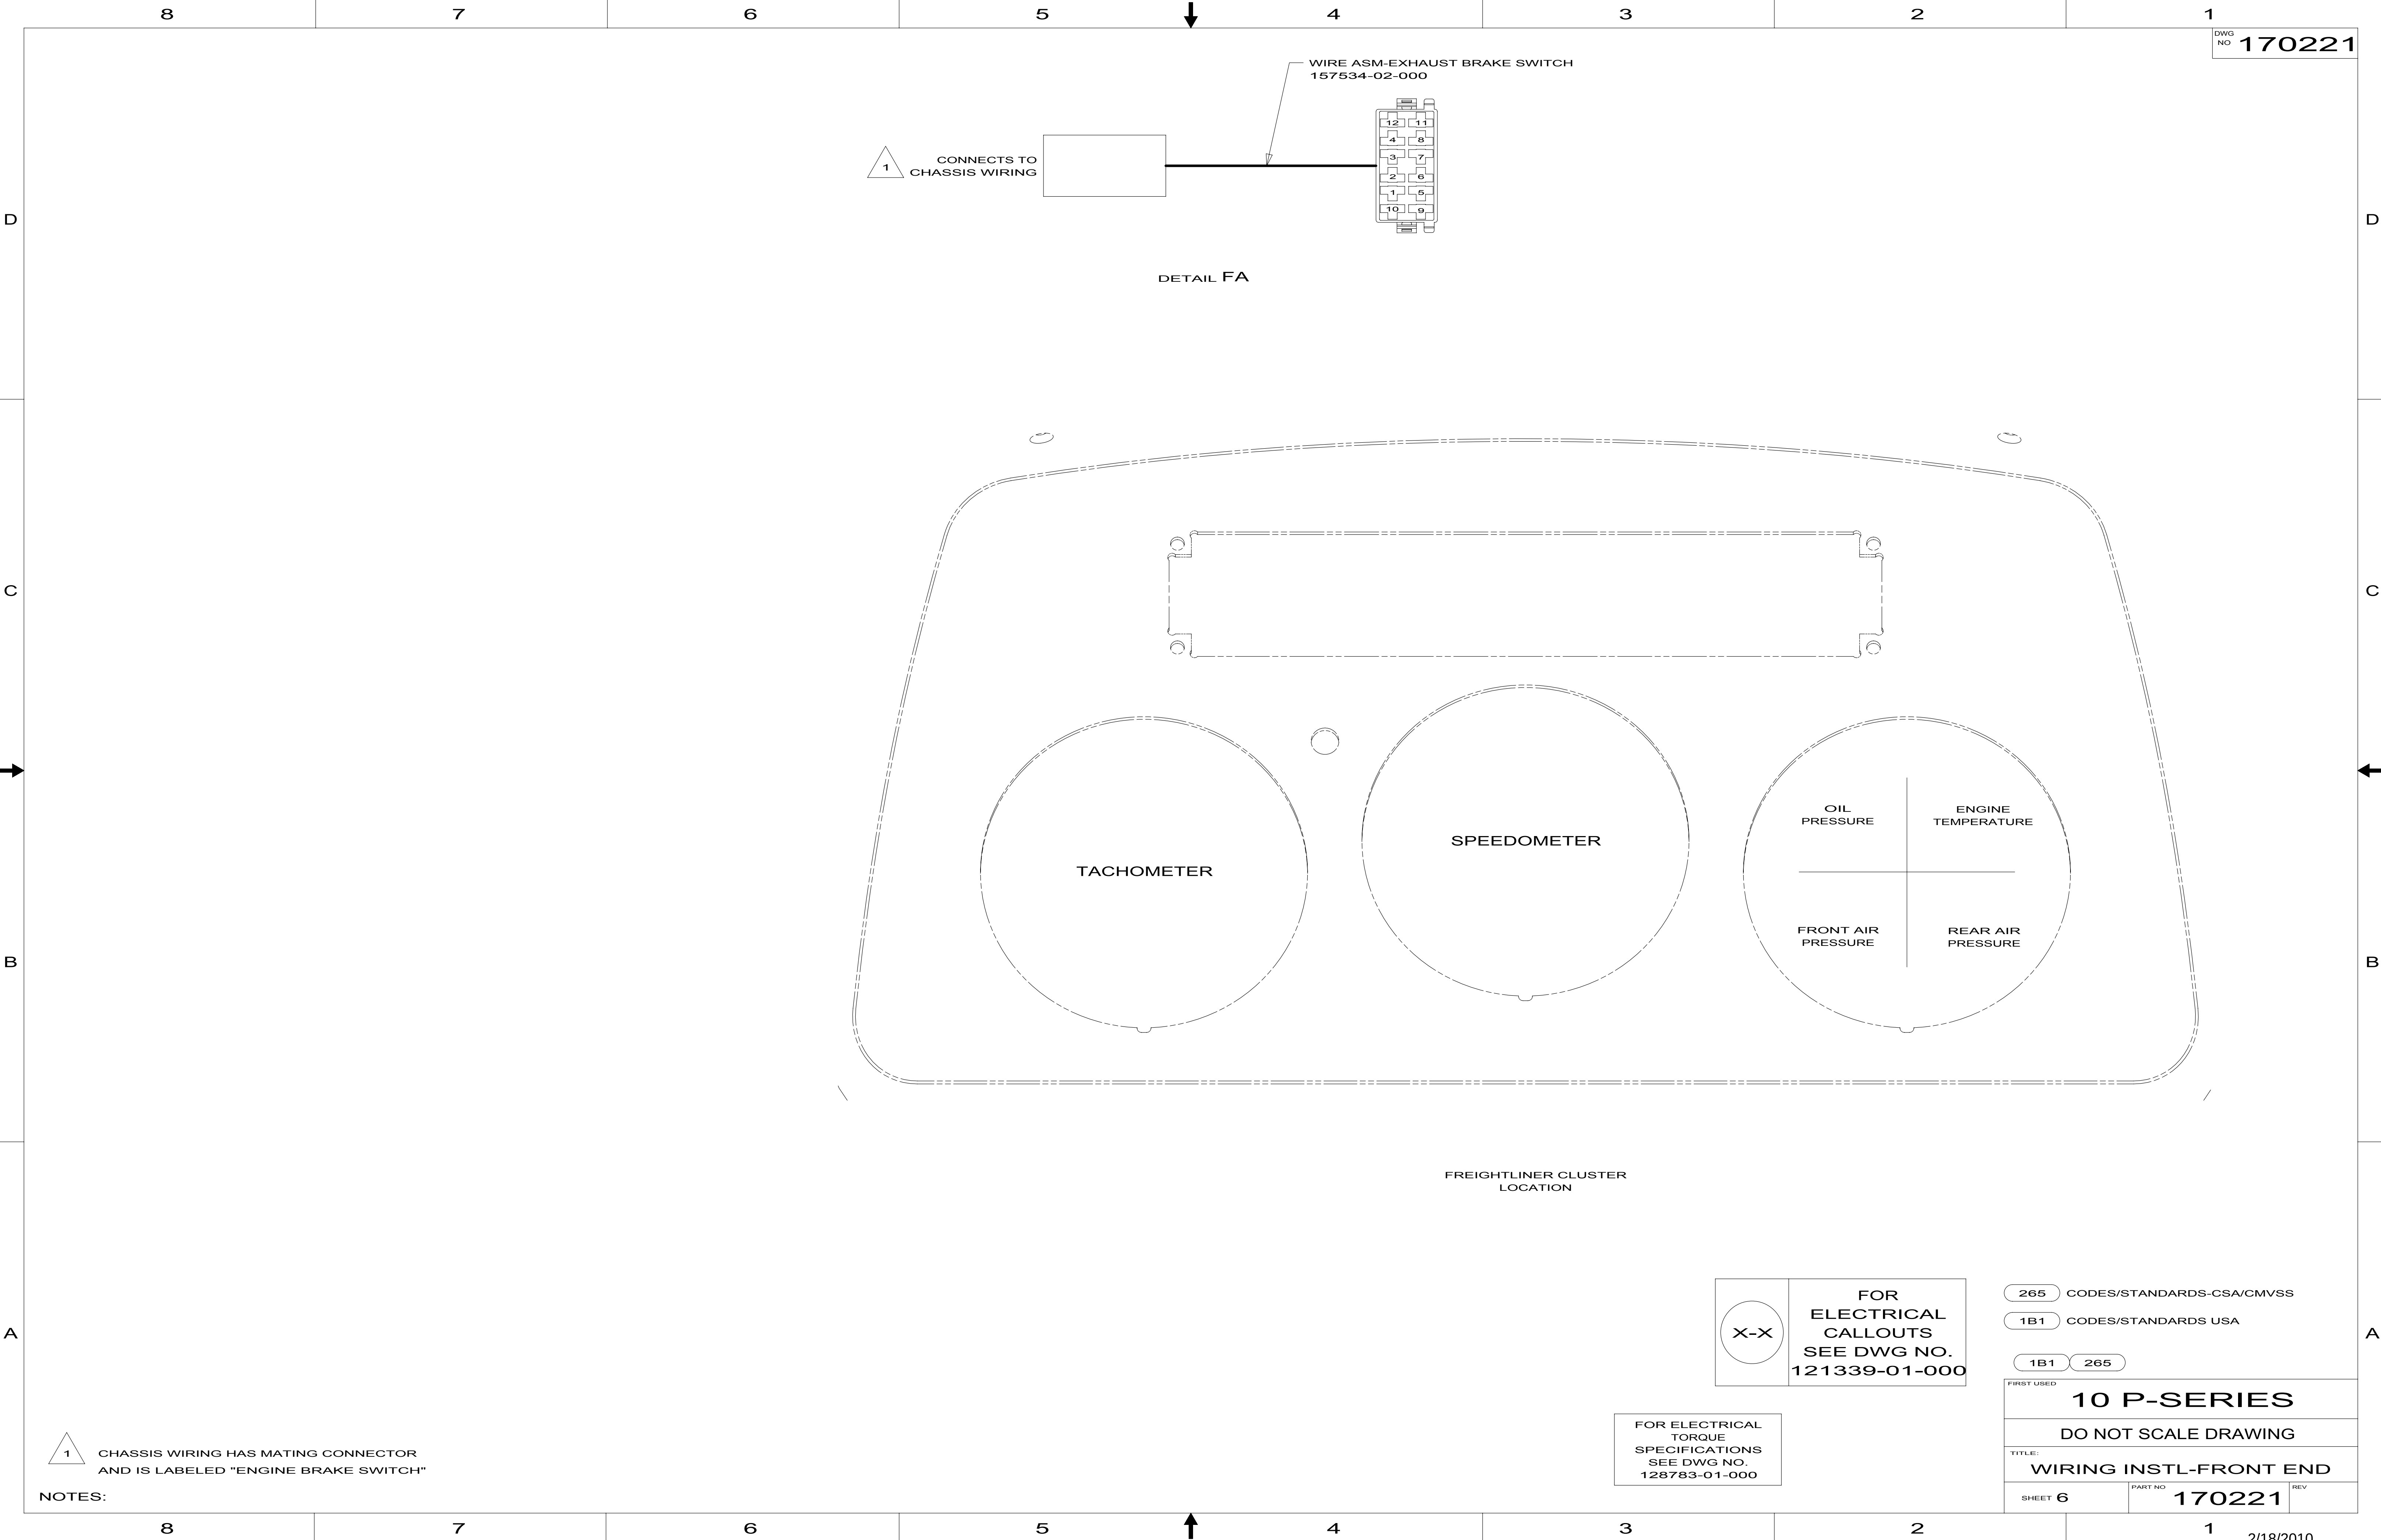

DWG NO. 170221

DETAIL FA

FREIGHTLINER CLUSTER LOCATION


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 6	PART NO. 170221	REV

NOTES:
1 CHASSIS WIRING HAS MATING CONNECTOR AND IS LABELED "ENGINE BRAKE SWITCH"

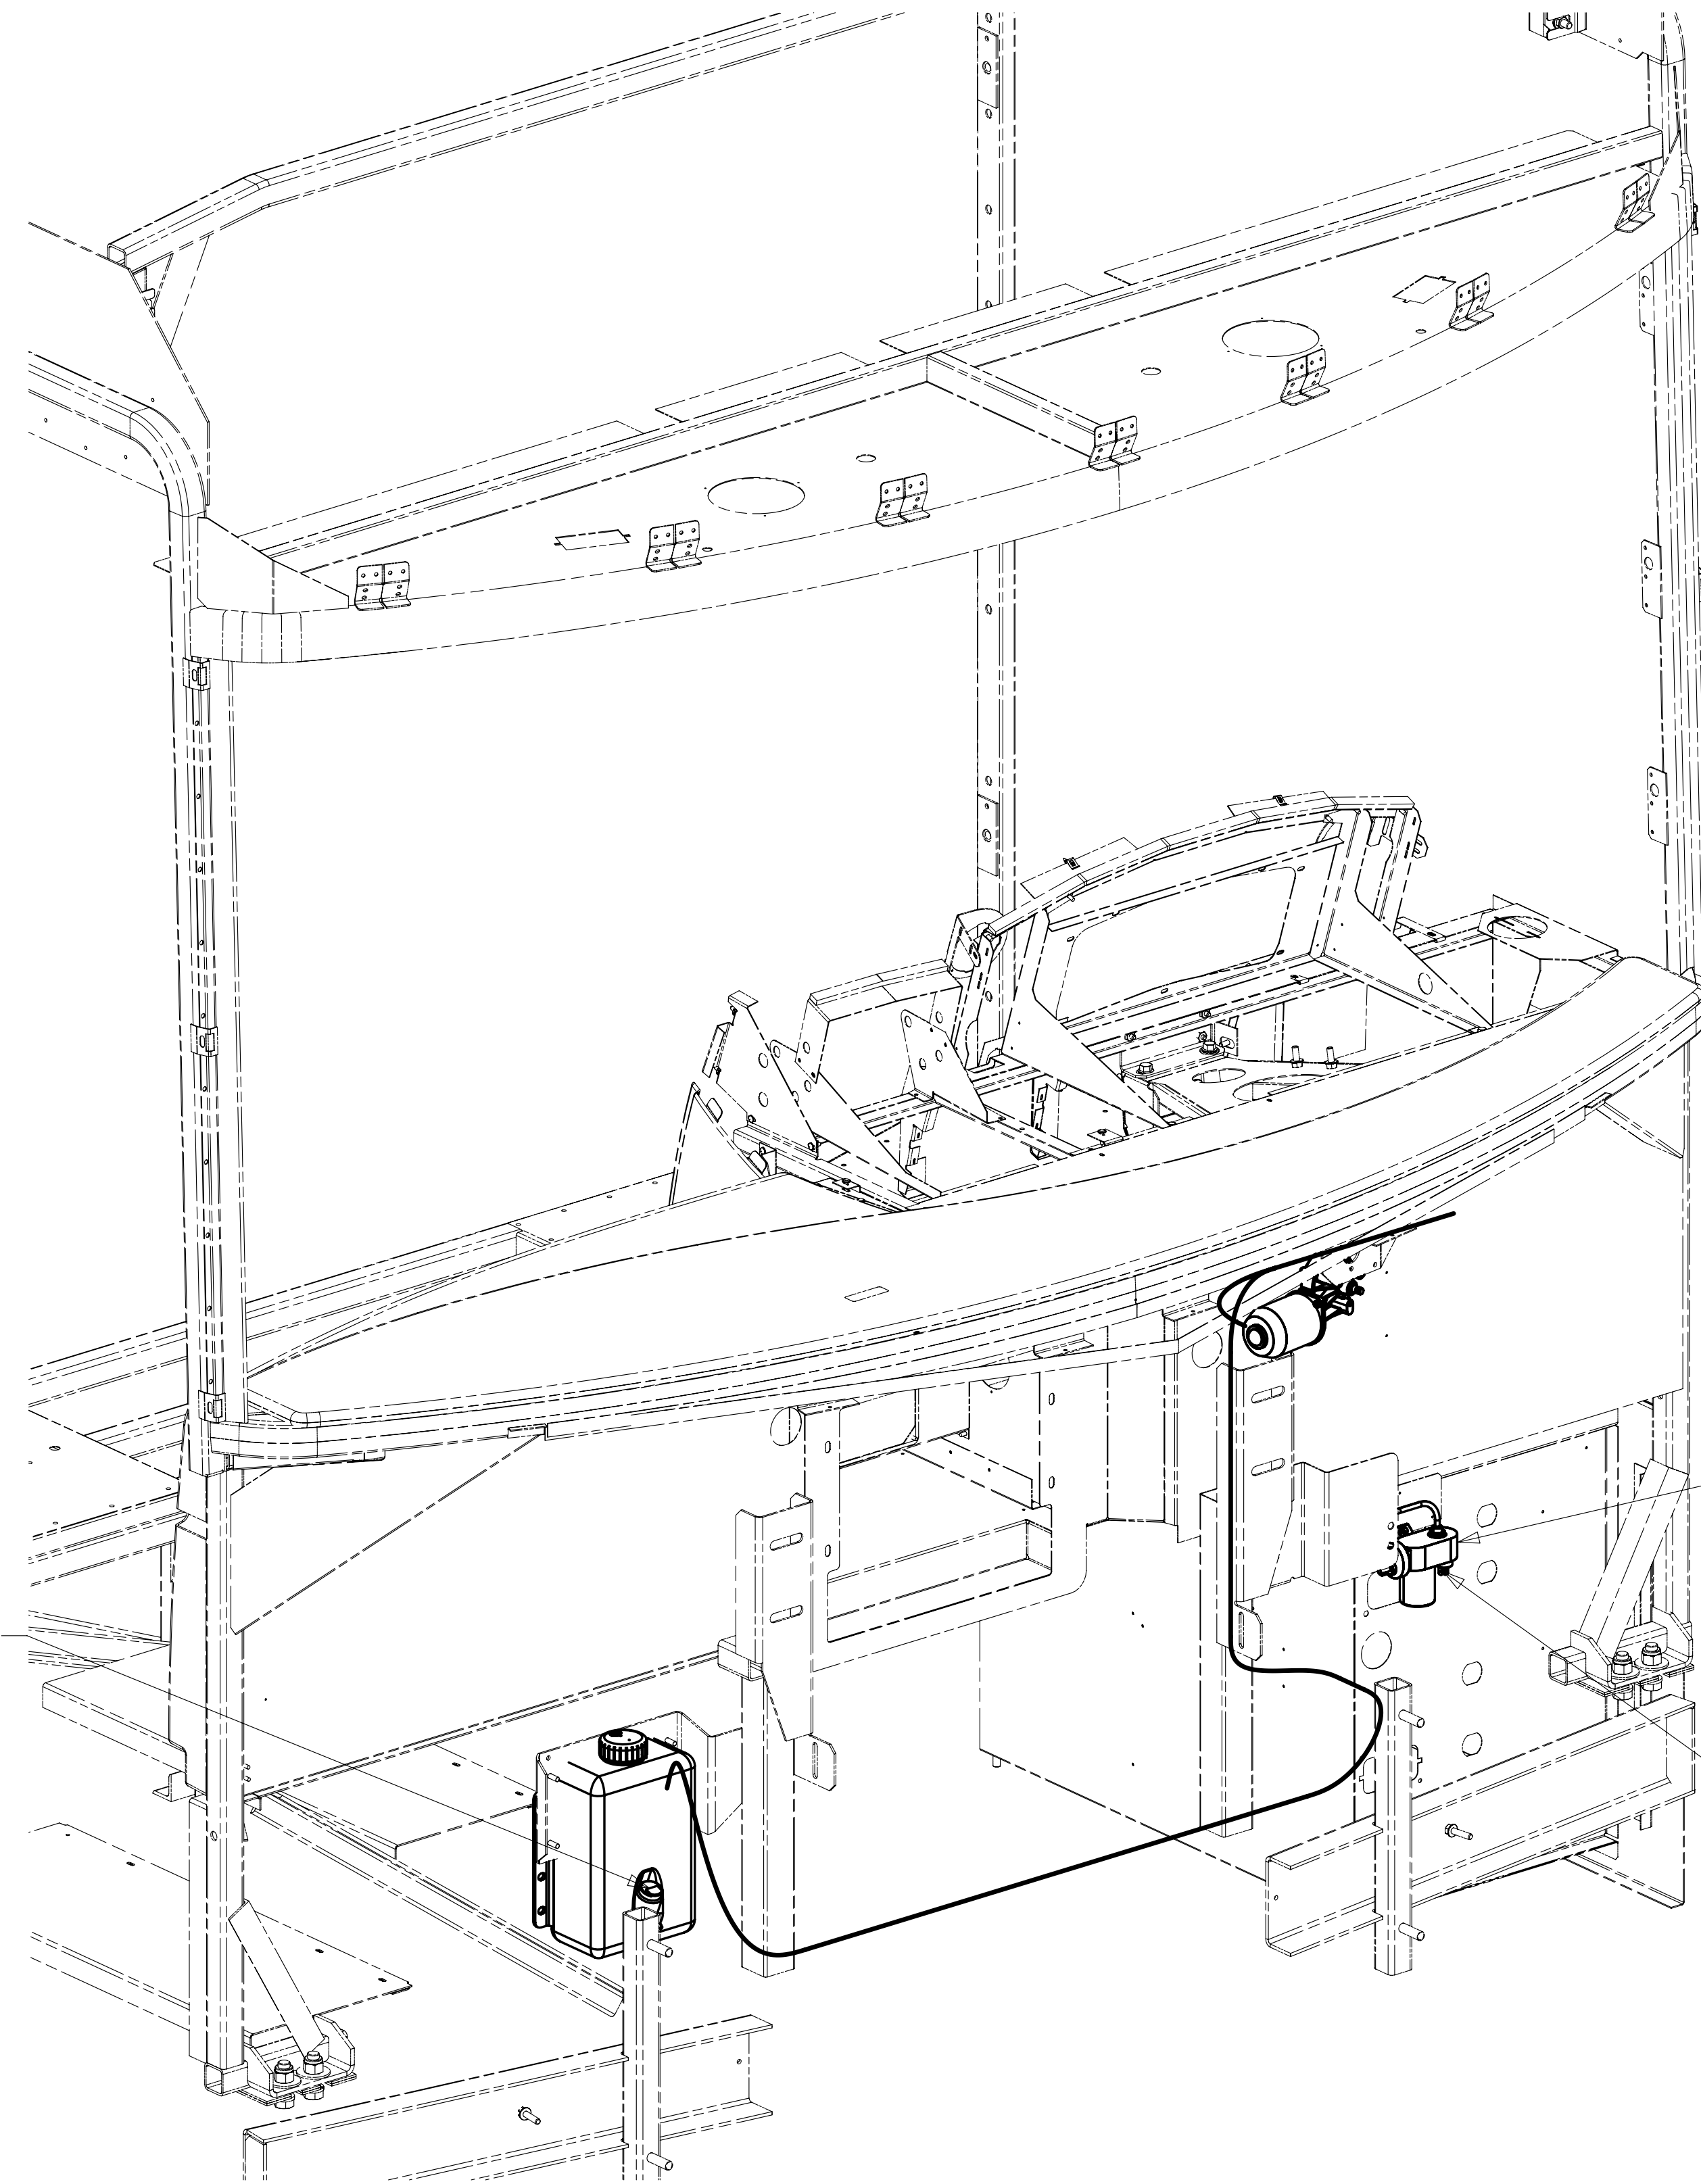

2 PIN HOUSING
TO WASHER BOTTLE

PUMP-VACUUM
114802-01-000
SCREW
000G11-08-12B (3)

2 PIN HOUSING
TO VACUUM PUMP

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

VIEW GA

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265


FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 7	PART NO 170221	REV

091206-04-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	091206-02-700	EA KNOB-INNER	66C-00019
	091206-02-701	EA KNOB-OUTER	66C-00020
	091206-04-700	EA SWITCH ASSEM. ONLY	250-6623
	102362-03-700	EA MODULE-WIPER CONT., DYNAMIC	66D-00093

151458-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	102756-02-702	EA BATTERY - 12 VOLT	402-1002
	102756-03-701	EA REMOTE-KEYLESS ENTRY	412-1115
	102756-03-702	EA RELAY- 30AMP - SPDT	463-1000
	151458-01-700	EA MODULE BOARD - 4 FUNCTION	202-3227
	151458-01-701	EA WIRE HARNESS - KEYLESS ENTRY	203-6908

151458-02-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	151458-02-700	EA COVERS (2 PER PKG) F/KEY PAD	208-3896
	151458-02-701	EA GASKET - OUTER - F/KEYPAD	308-2094

J-SERIES
P-SERIES
R-SERIES
169847-04

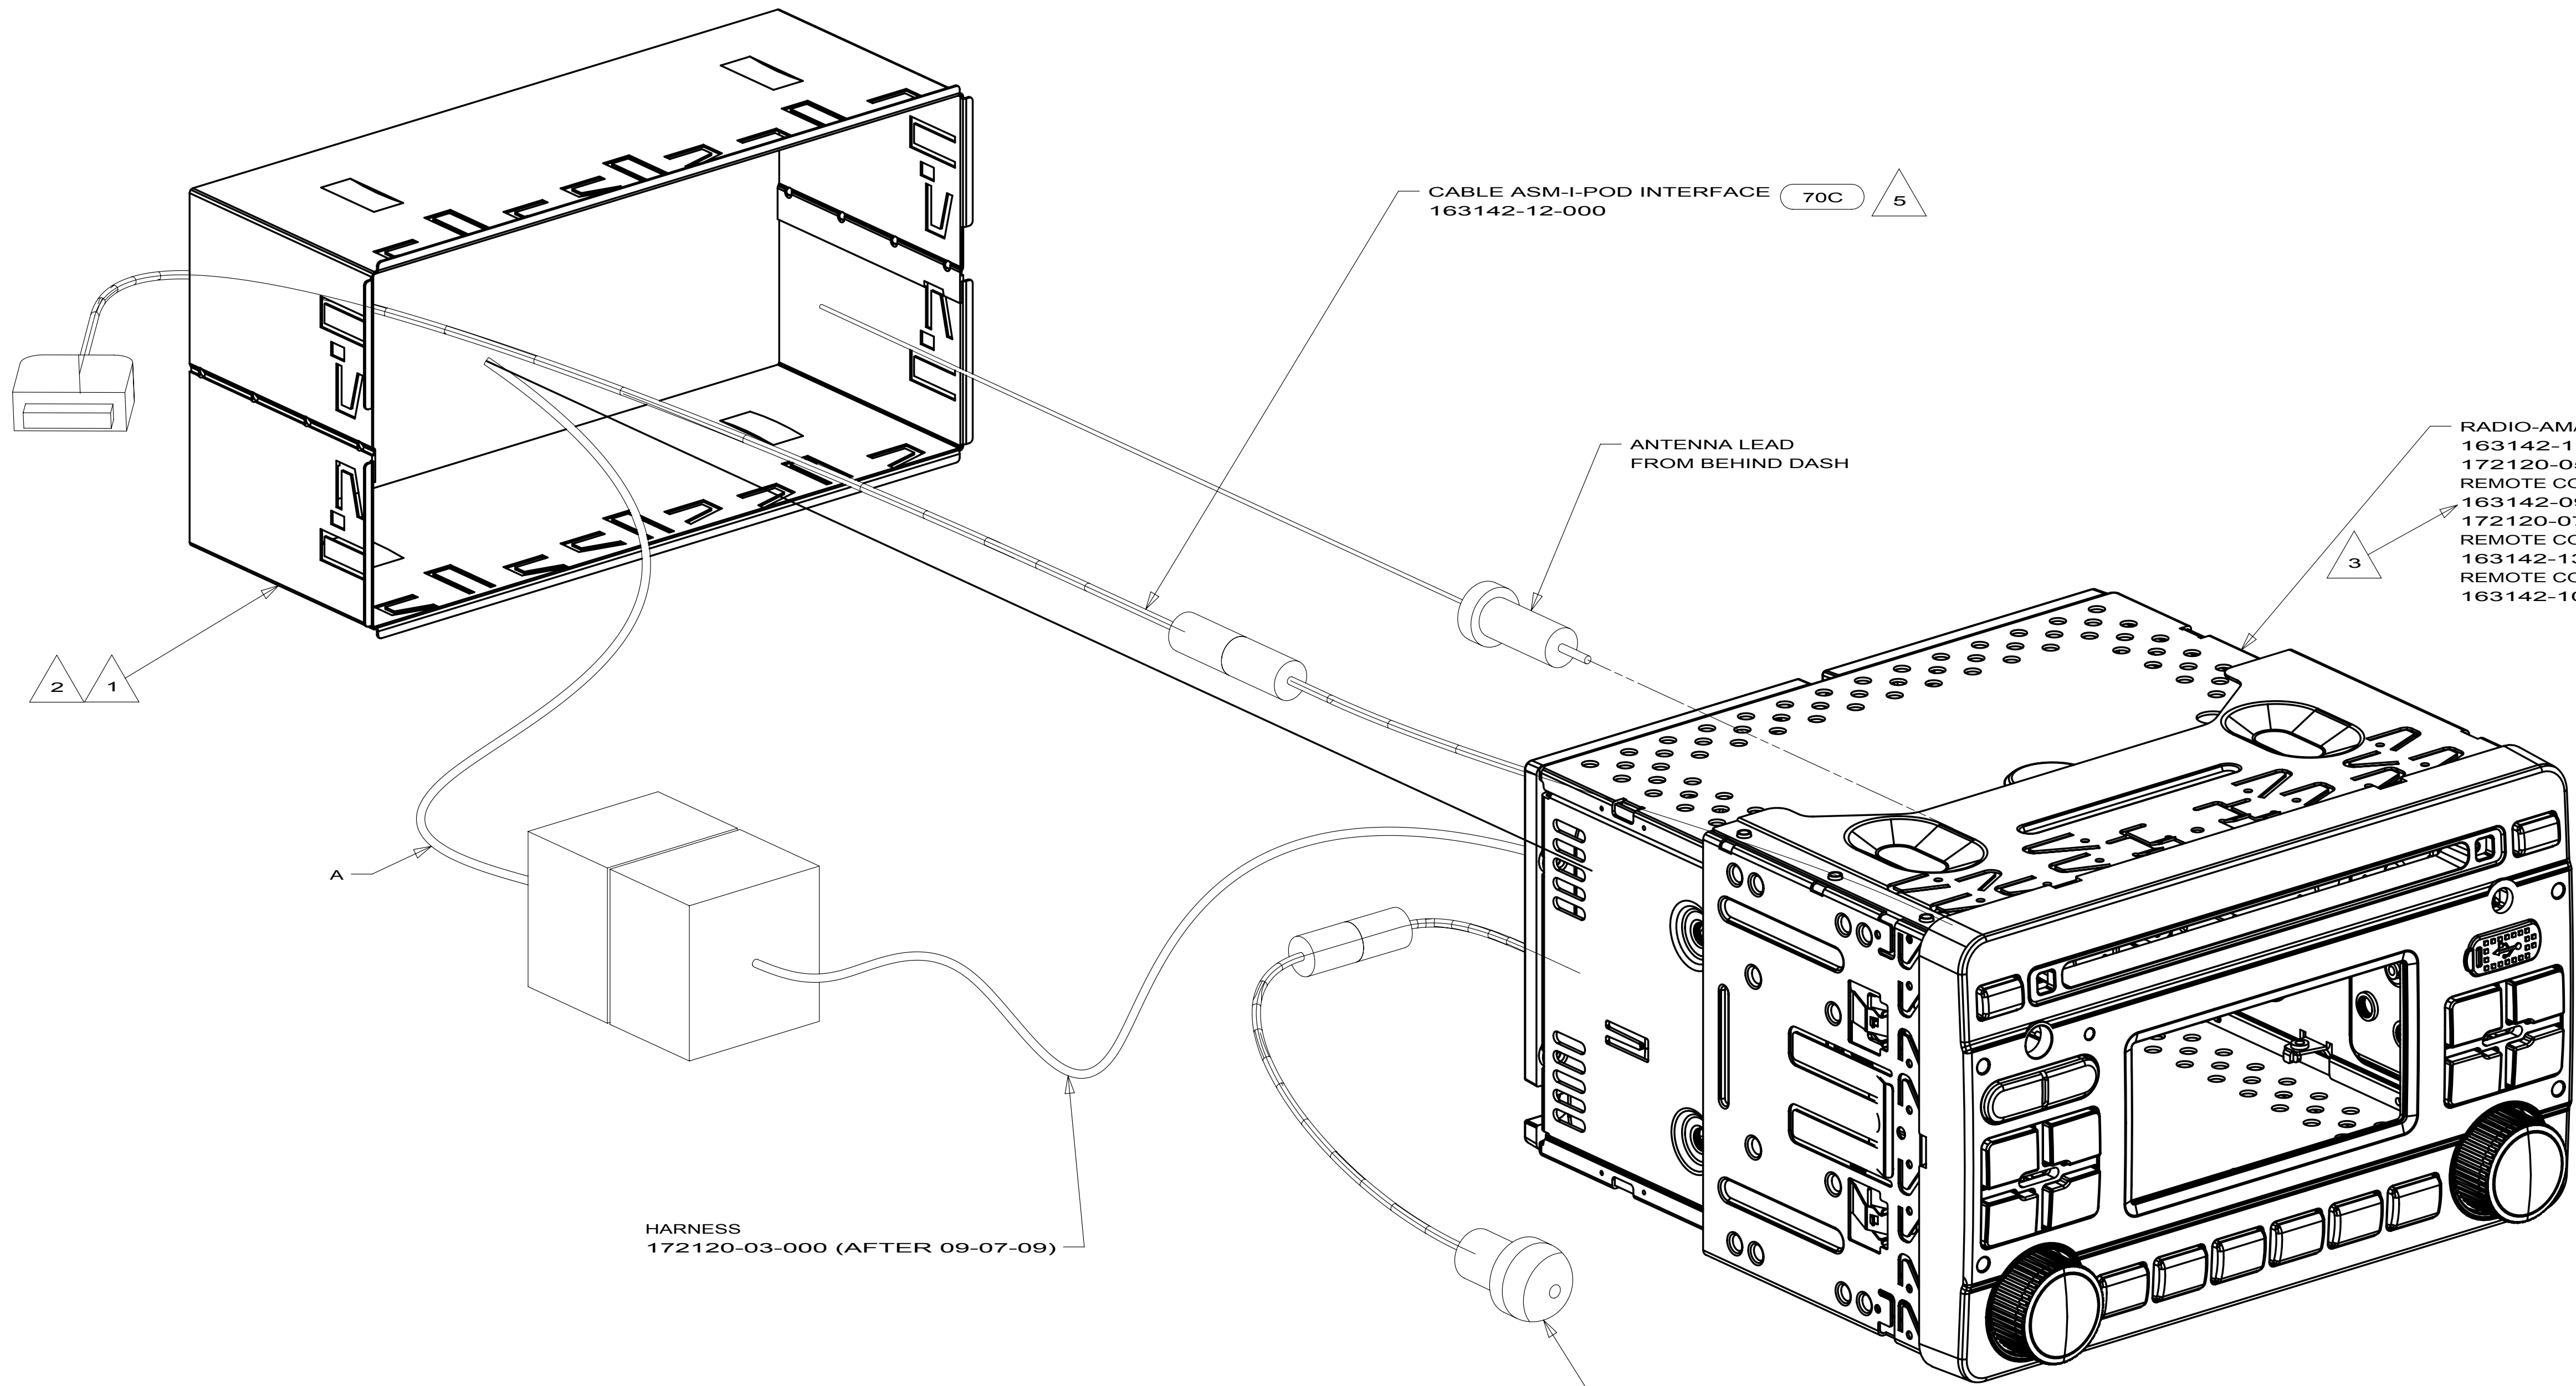

- 7 FORD CHASSIS.
- 6 WORKHORSE AND FREIGHTLINER CHASSIS.
- 5 PLUG I-POD CABLE INTO LEAD ON BACK OF RADIO MARKED 'I-POD'. ROUTE CABLE UP LEFT A-PILLAR AND INTO OVERHEAD CABINET ABOVE DRIVER. LEAVE 600 MM OF CABLE IN OVERHEAD TIED UP WITH WIRE TIE 8343-01-000.
- 4 INSTALL PER DRAWING 170205.
- 3 TO BE SUPPLIED LOOSE IN WINNEBAGO OWNERS CASE.
- 2 BEND TABS ON ALL 4 SIDES TO SECURE MOUNTING BRACKET TO DASH OPENING.
- 1 SUPPLIED WITH RADIO.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 70C RADIO - SATELLITE
- 19V RADIO-AM/FM STEREO CD PLAYER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 19V

FIRST USED		
10 J,P,R-SERIES		
DO NOT SCALE DRAWING		
TITLE: RADIO INSTL		
SHEET 4	PART NO 169847	REV

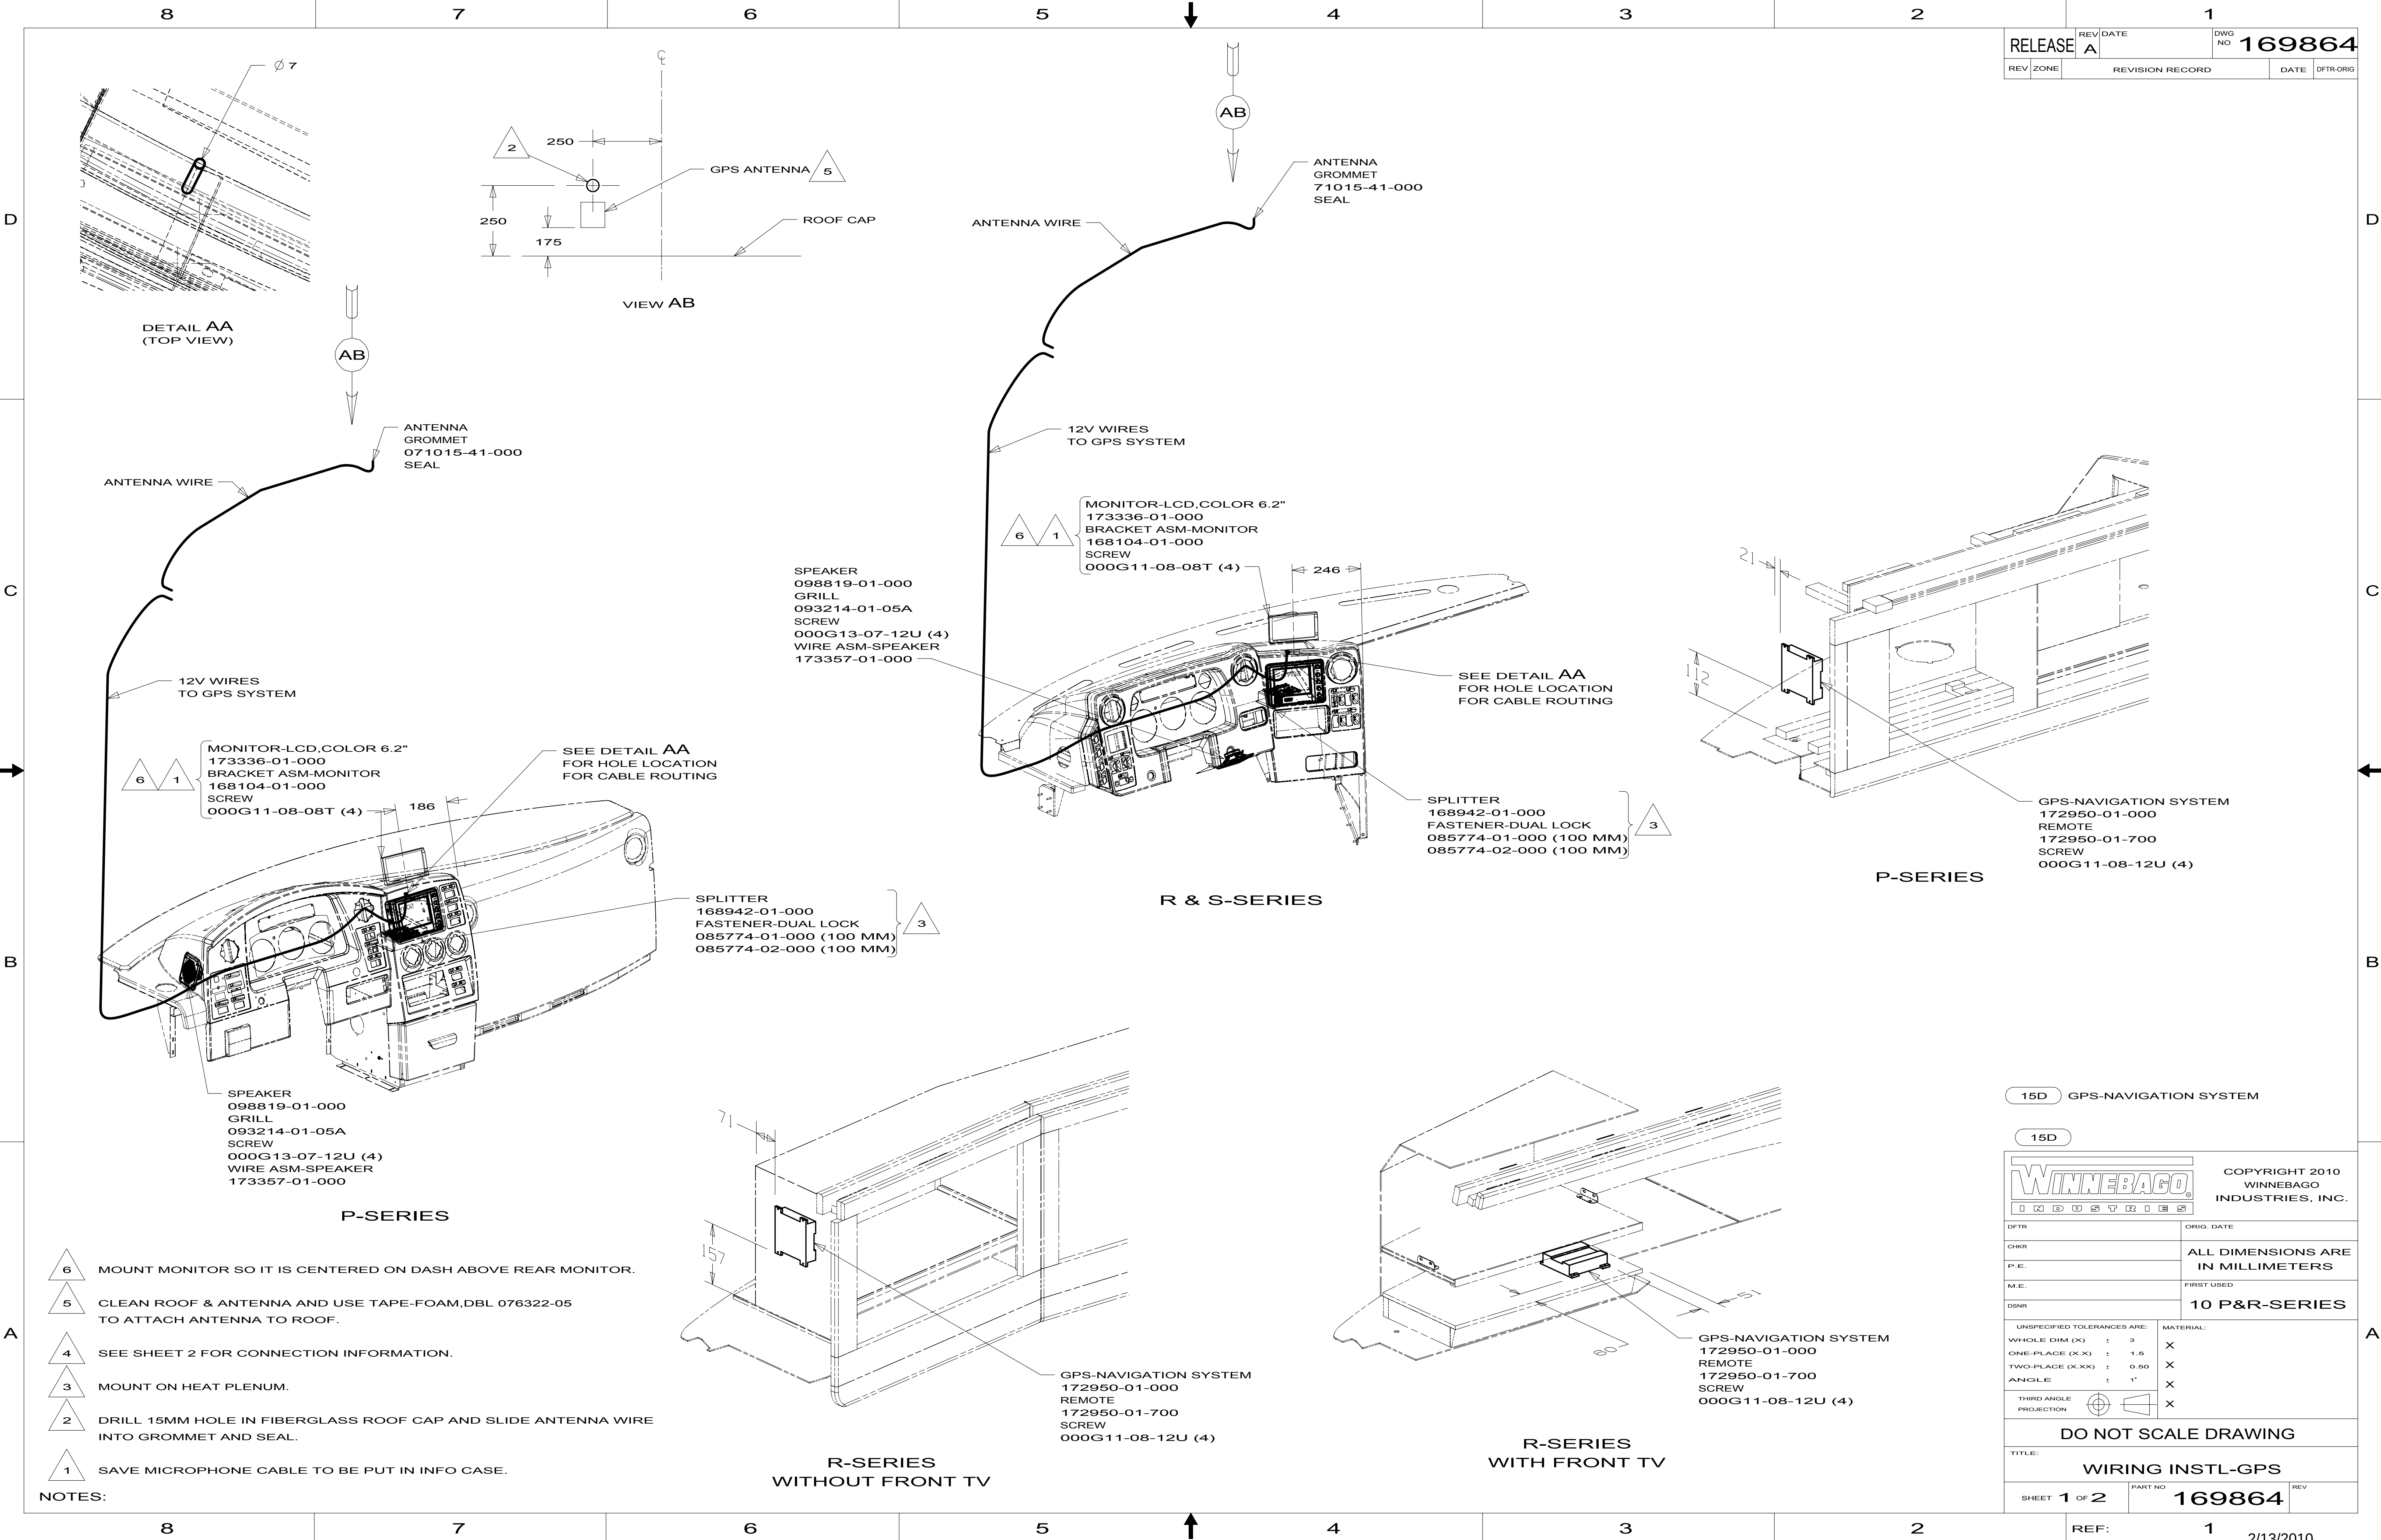

15D

GPS-NAVIGATION SYSTEM

15D

WINNEBAGO

INDUSTRIES

COPYRIGHT 2010

WINNEBAGO

INDUSTRIES, INC.

DFT-ORIG

CHGR

P.E.

M.E.

DSNR

ORIG. DATE

ALL DIMENSIONS ARE IN MILLIMETERS

FIRST USED

10 P&R-SERIES

UNSPECIFIED TOLERANCES ARE:

WHOLE DIM (X) ± 3

ONE-PLACE (X.X) ± 1.5

TWO-PLACE (X.XX) ± 0.50

ANGLE ± 1°

THIRD ANGLE PROJECTION

MATERIAL:

X

X

X

X

X

DO NOT SCALE DRAWING

TITLE:

WIRING INSTL-GPS

SHEET 1 OF 2


PART NO 169864

REV

REF:


1

2/13/2010

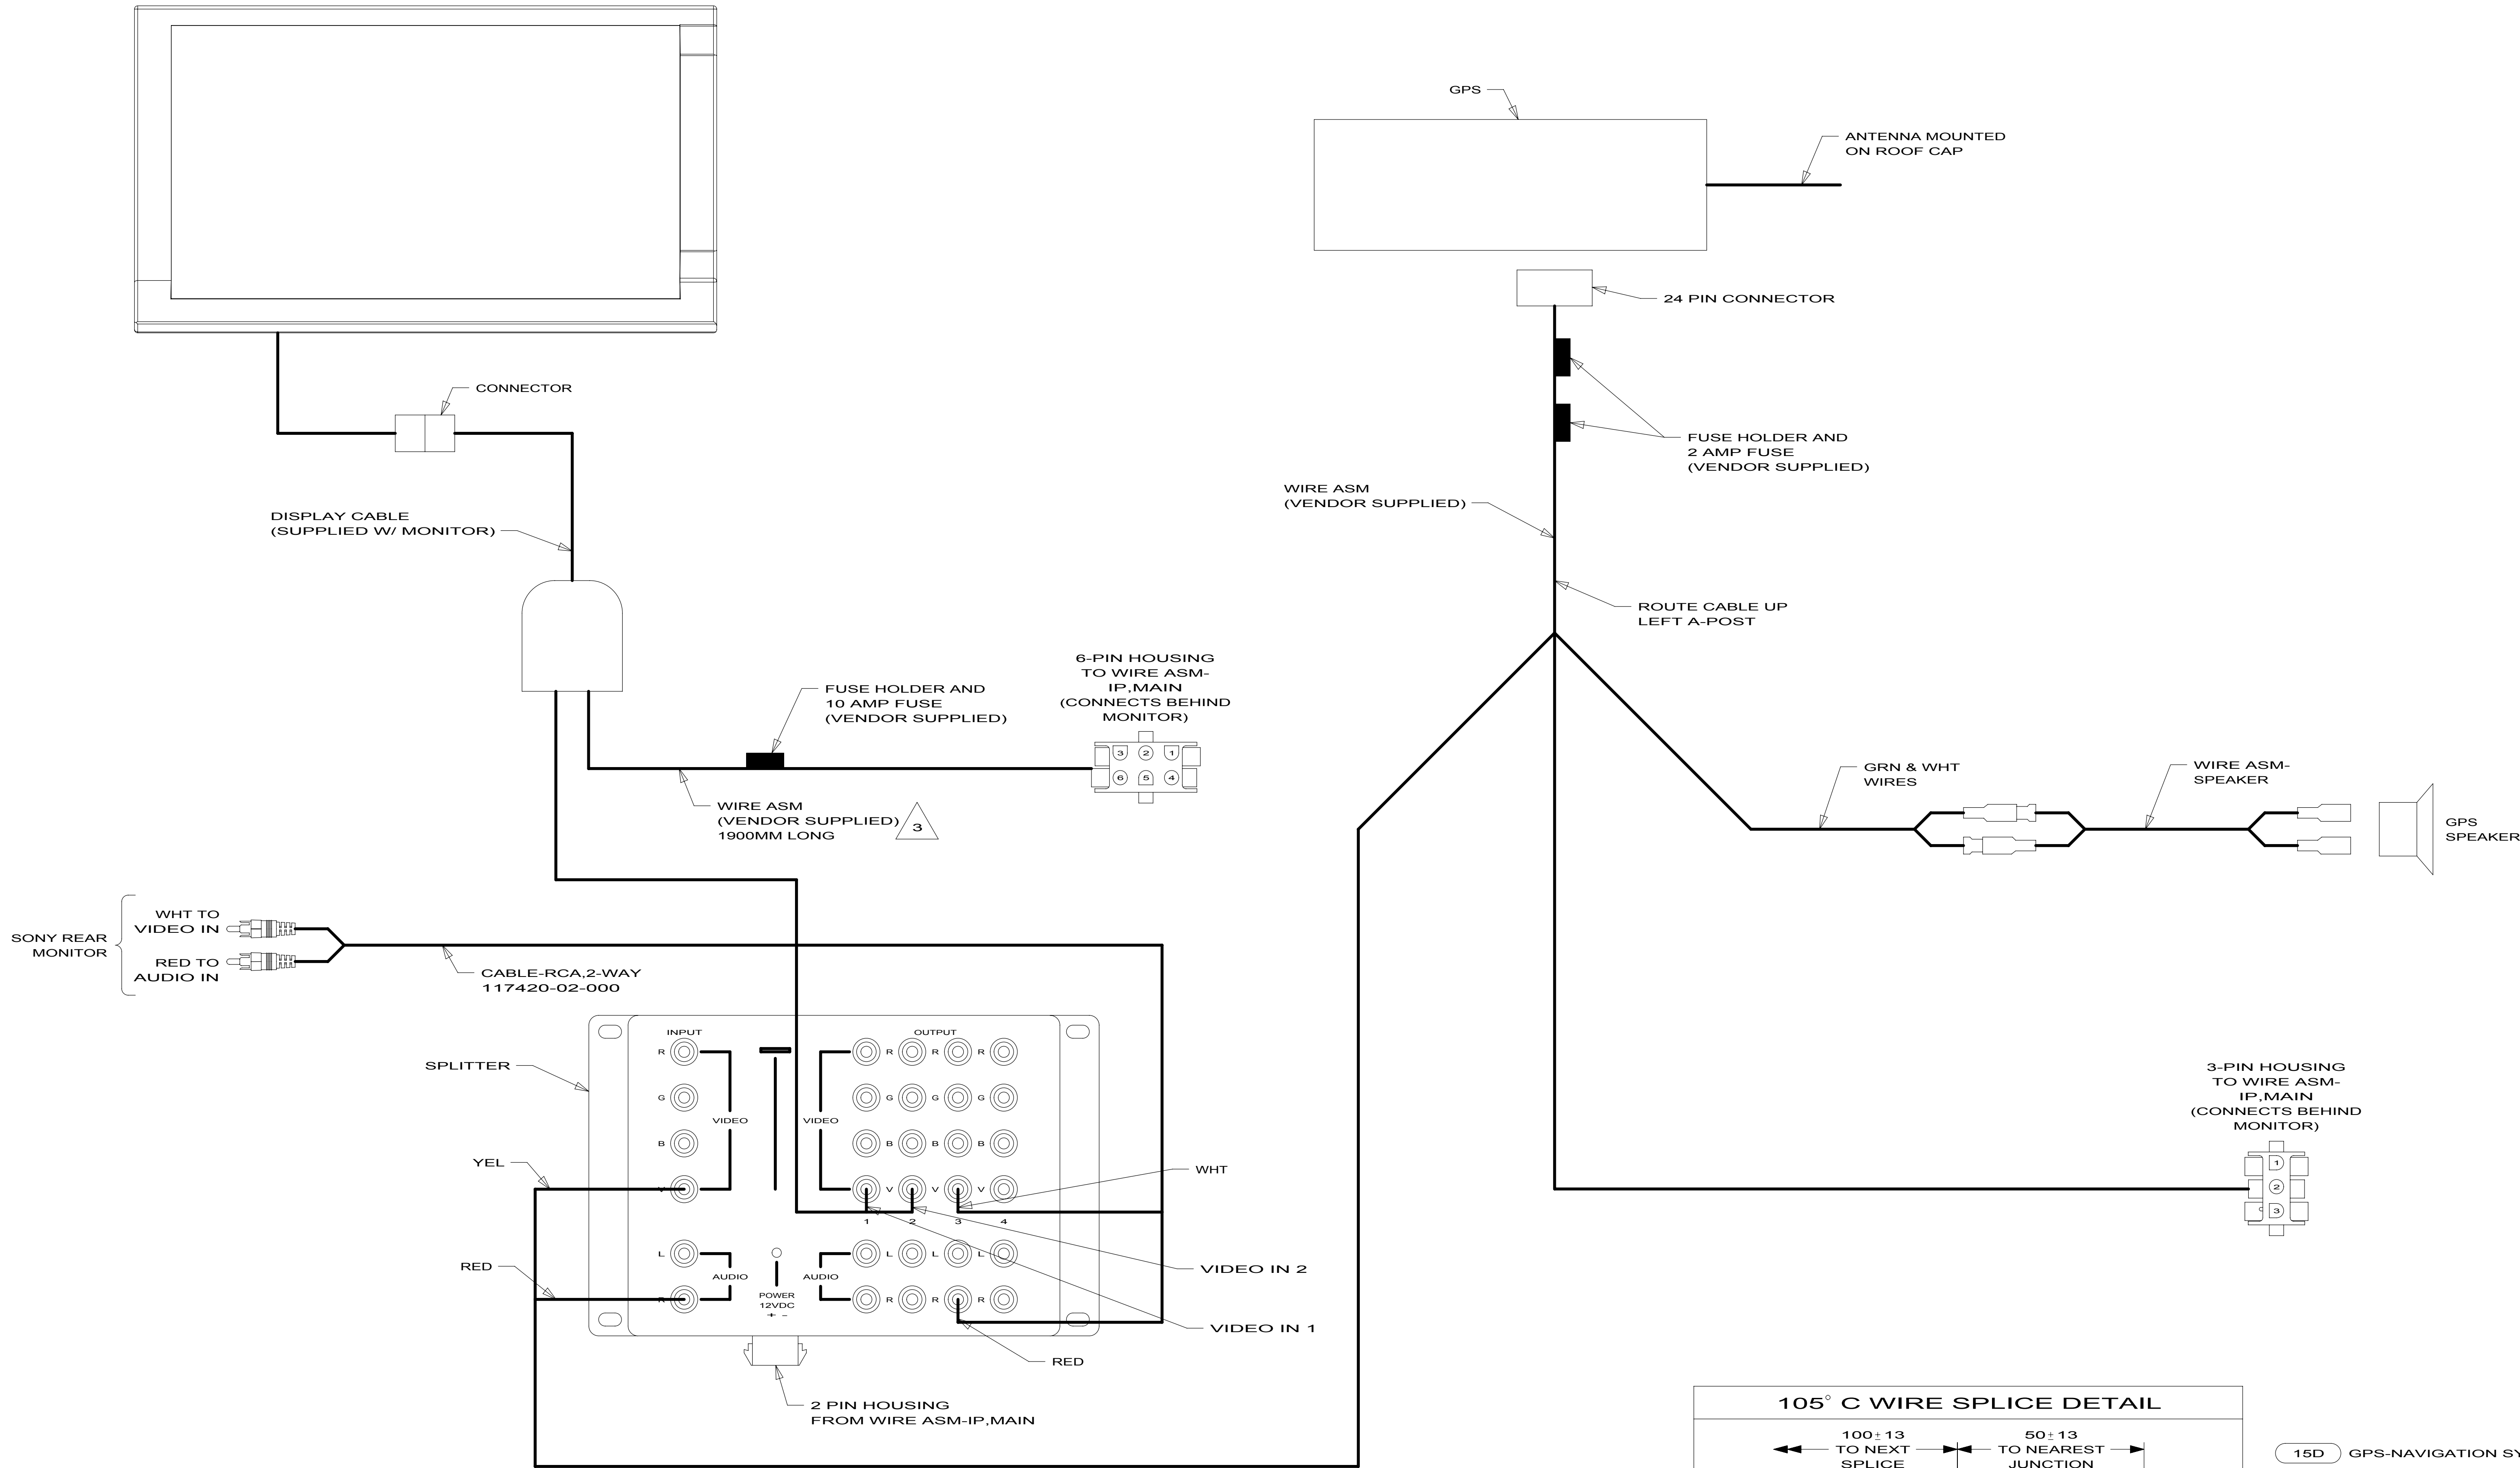

- NOTES:
- 4 RCA CABLES ARE NOT USED
 - 3 CUT WIRE ASM TO AVOID EXCESS WIRE BUNDLING AND TAPE UNUSED WIRES.
 - 2 CUT TERMINALS FROM VENDOR SUPPLIED WIRES AND SPLICE AS SHOWN.
 - 1 NOT USED, CUT WIRE AND TIE BACK TO LOOM.

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

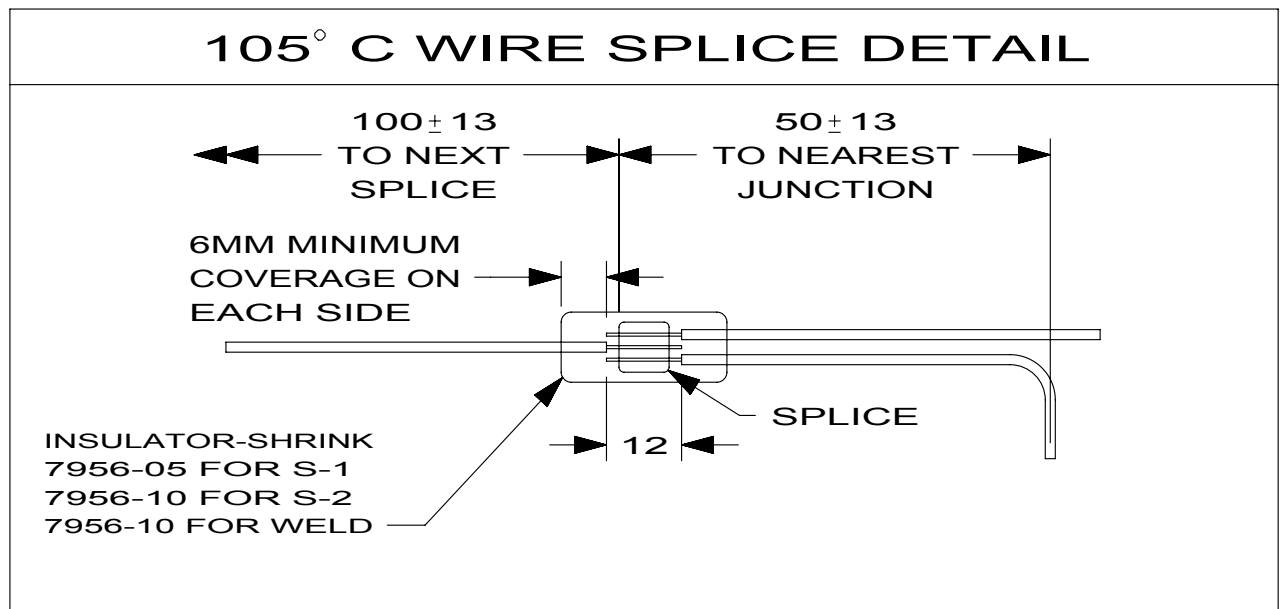

15D GPS-NAVIGATION SYSTEM


15D

FIRST USED 10 P&R-SERIES

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-GPS

SHEET 2 PART NO 169864 REV

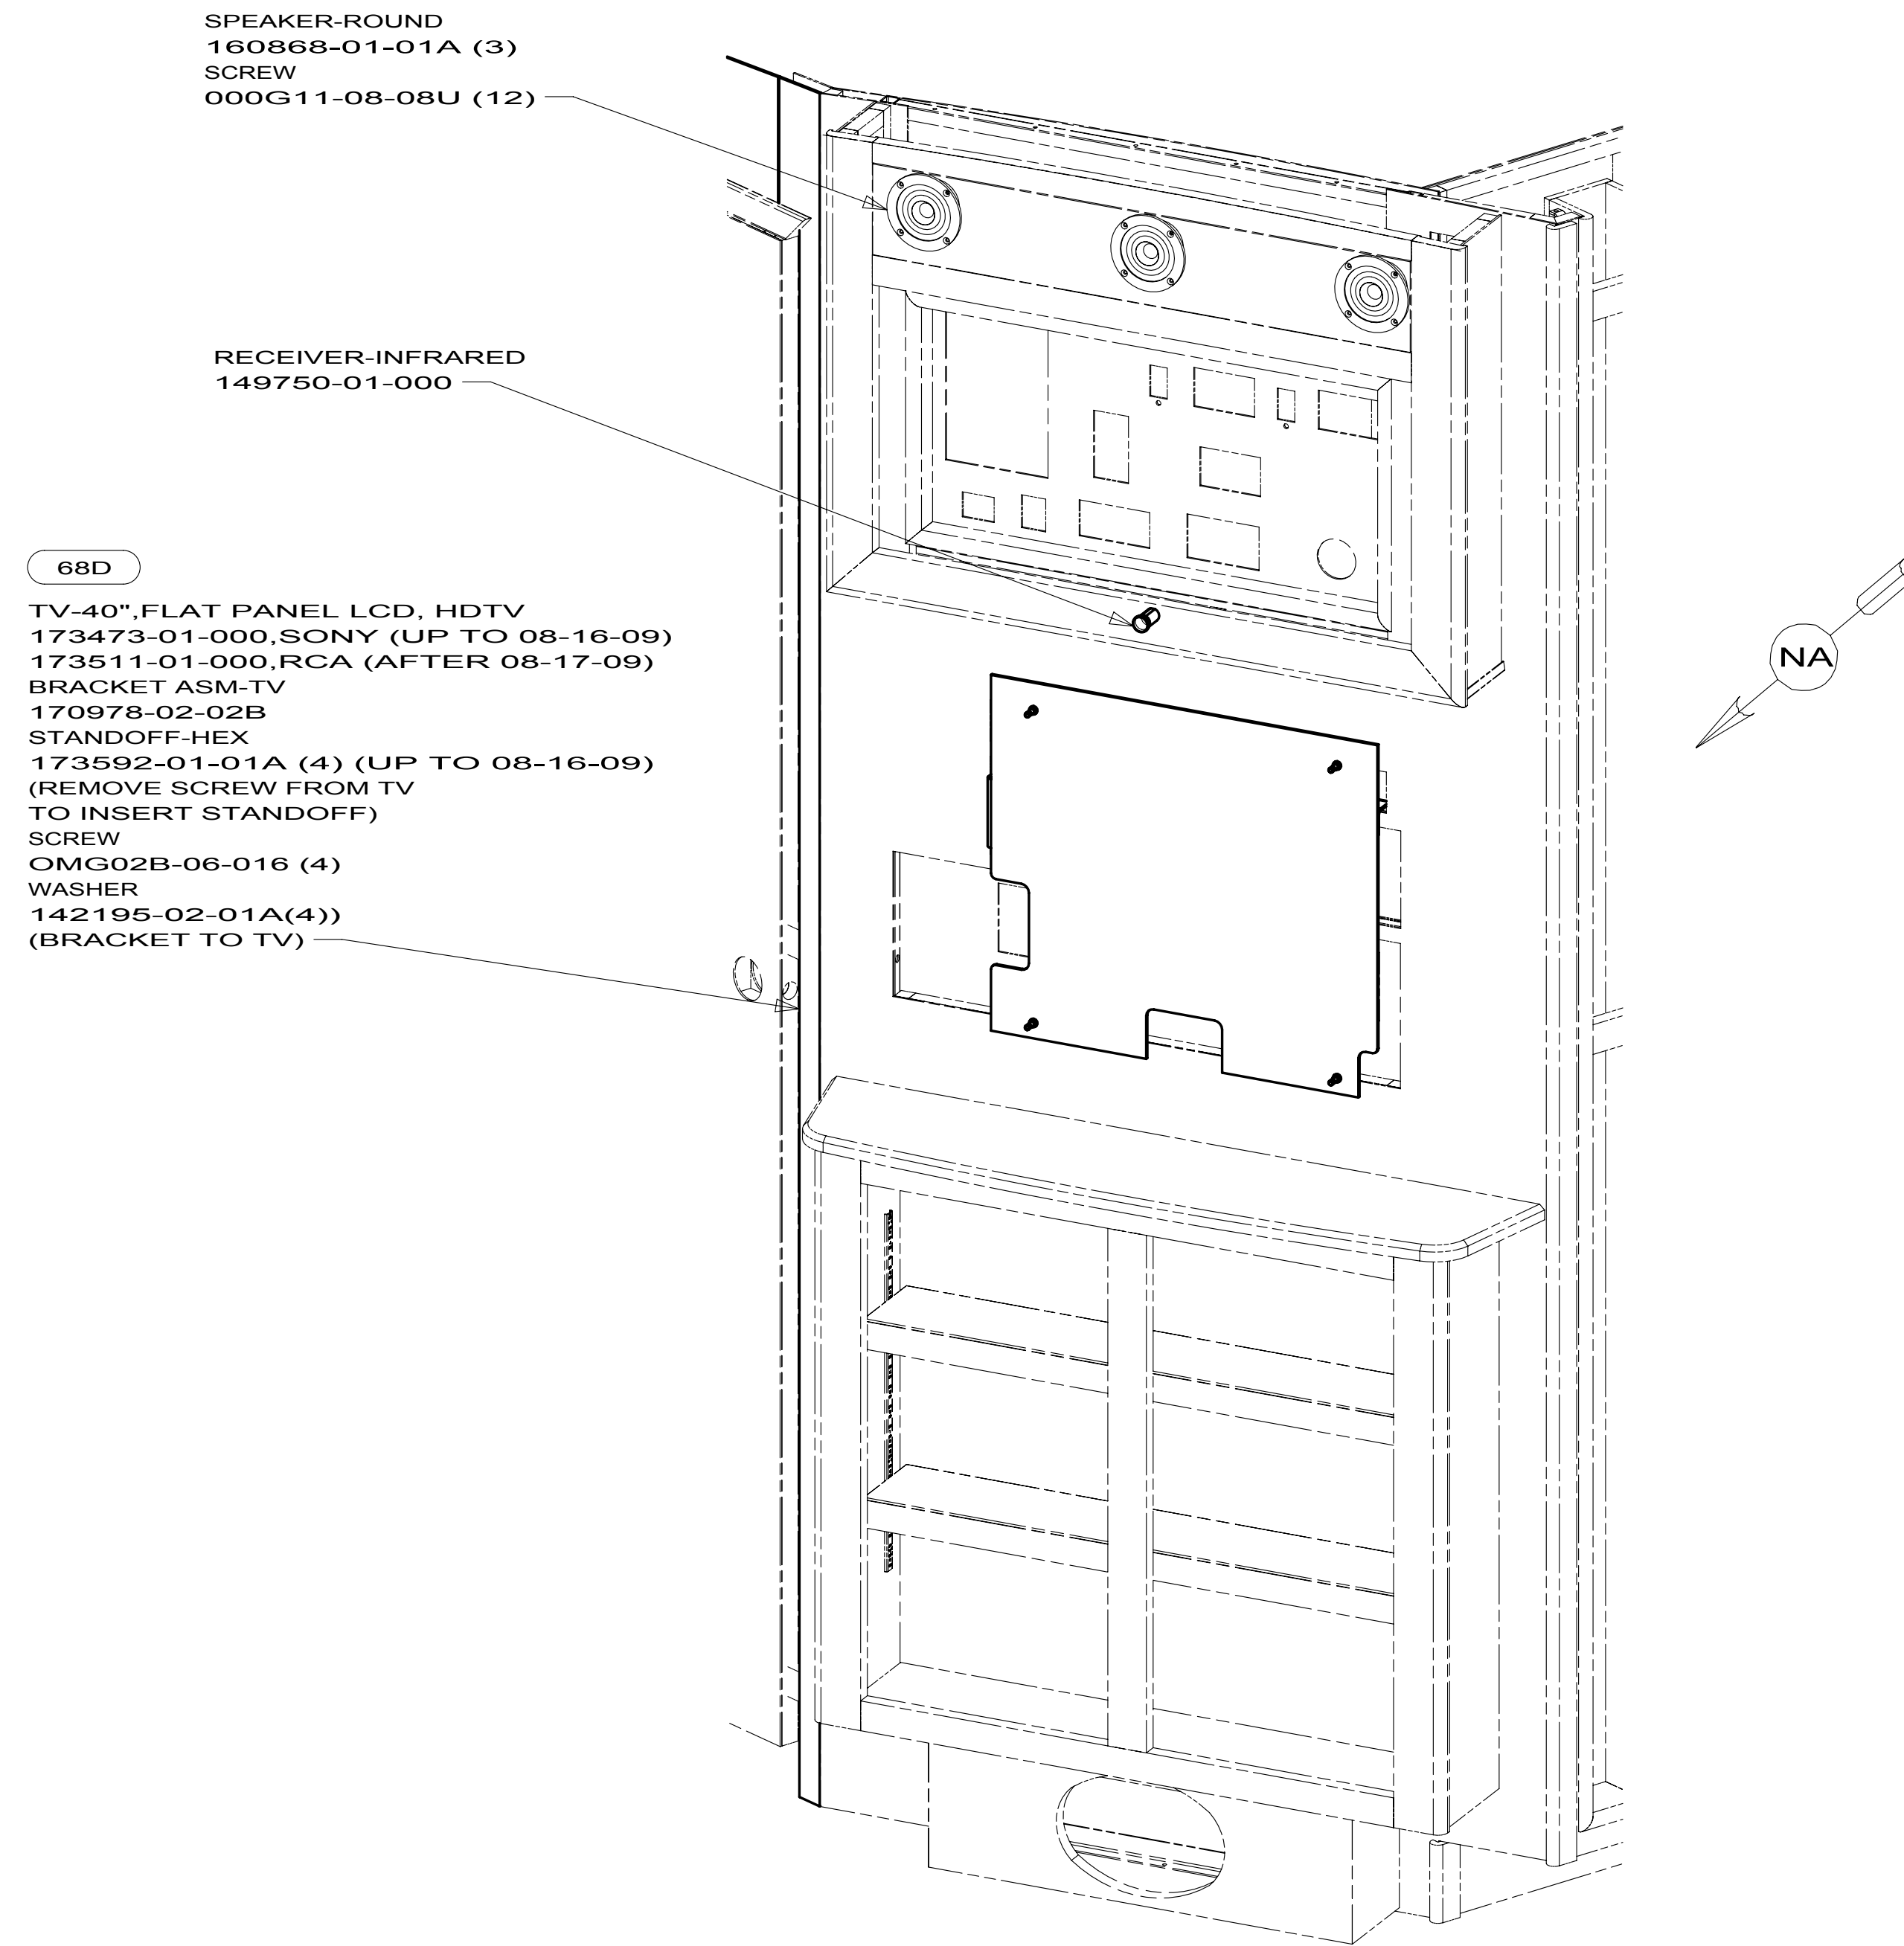

39N

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	---

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

68D TV-40" COLOR,STEREO W/REMOTE

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED			
10 P-SERIES			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-TV/DVD			
SHEET 7		PART NO	REV
		169920	

TV-26",FLAT PANEL LCD, HDTV
171727-01-000
SCREW
OMG02B-06-016 (4)
(BRACKET TO TV)
SCREW
000G39-08-12U (10)
(BRACKET TO WALL)

BRACKET-TV
168041-01-02B
BOLT
000C12-08-24B (2)
WASHER-LOCK
000E11-08-00B (2)
WASHER
000E13-21-00T (2)


BRACKET ASM-WALL,BDRM
168039-02-02B
SCREW
000G39-10-12U (12)

BRACKET-TV
168040-01-02B
BOLT
000C12-08-24B (2)
WASHER-LOCK
000E11-08-00B (2)
WASHER
000E13-21-00T (2)

172
VIEW HA
(TV NOT SHOWN)

61K

P39N

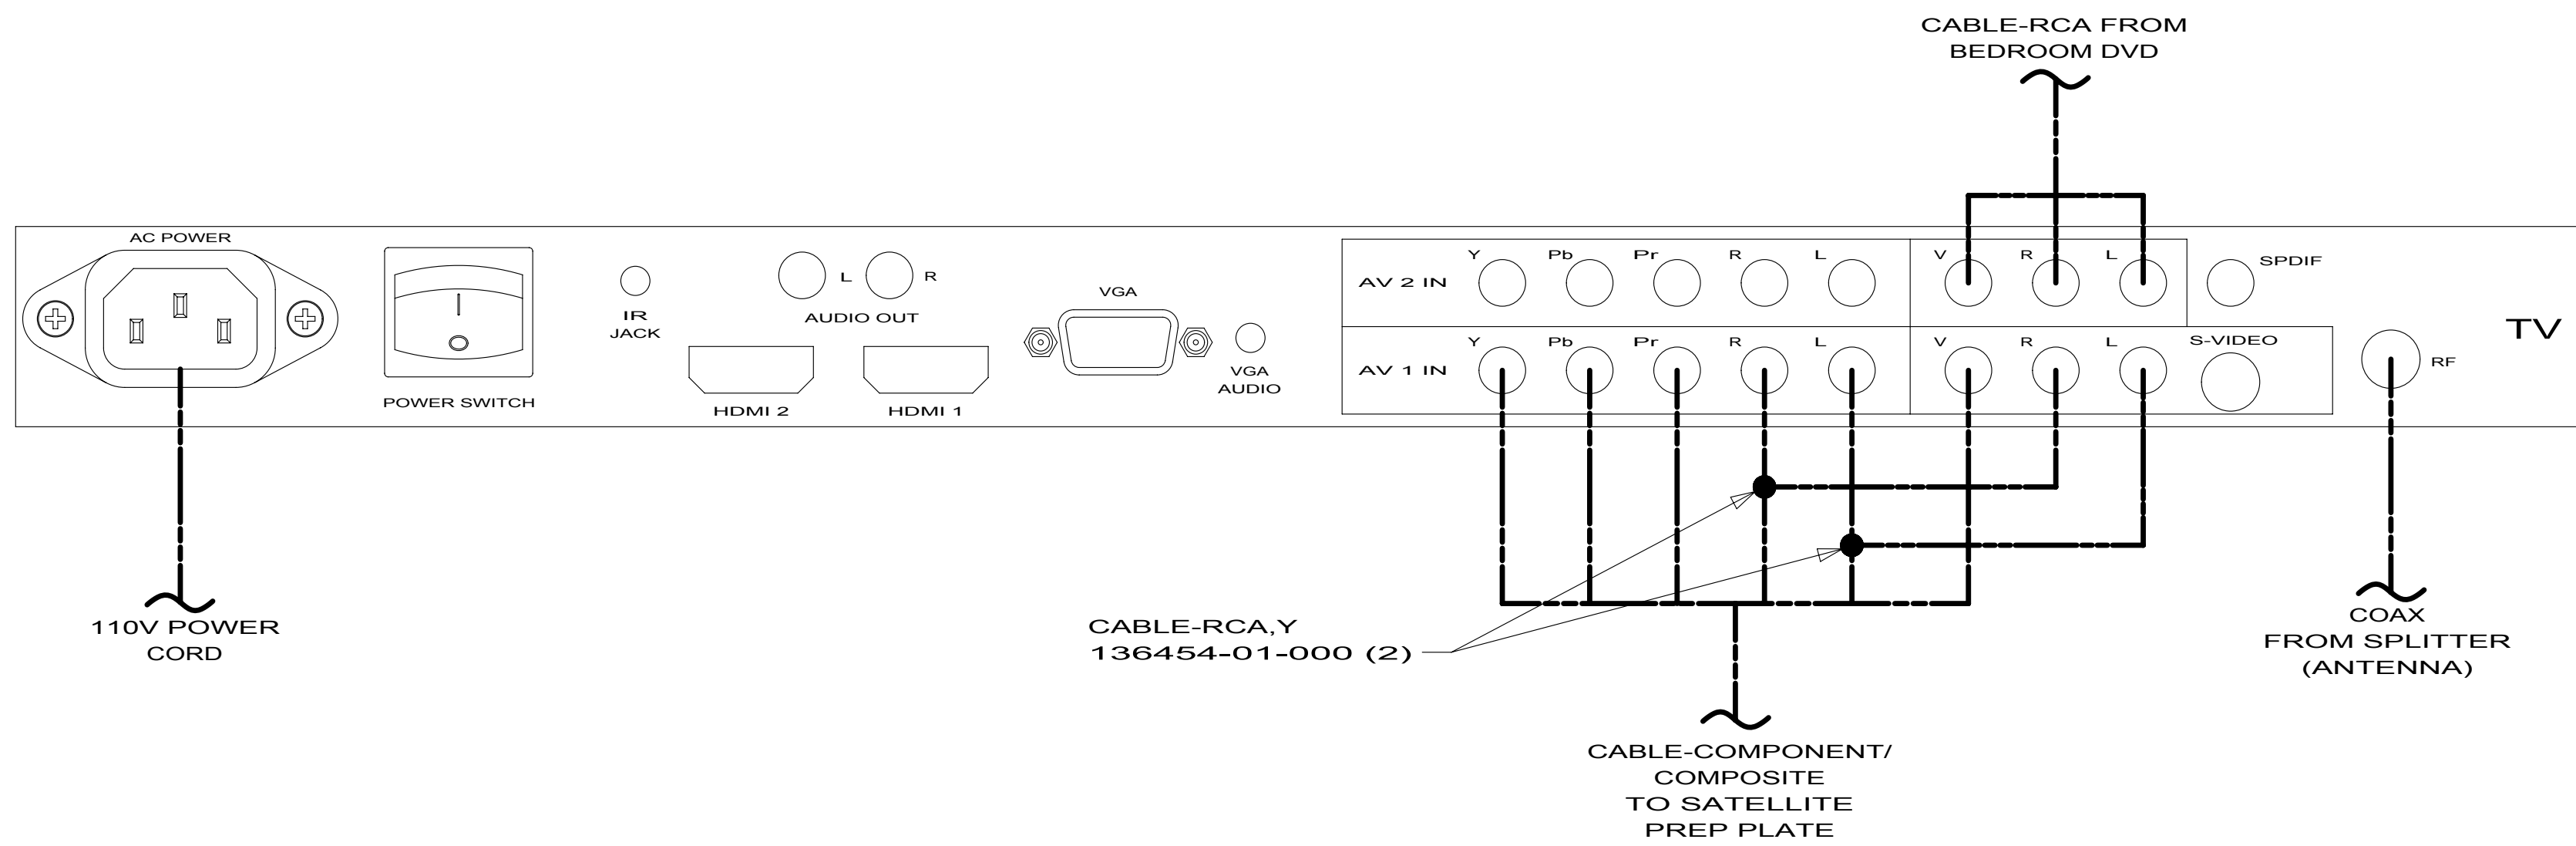

DETAIL HB

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-TV/DVD		
SHEET 8	PART NO 169920	REV

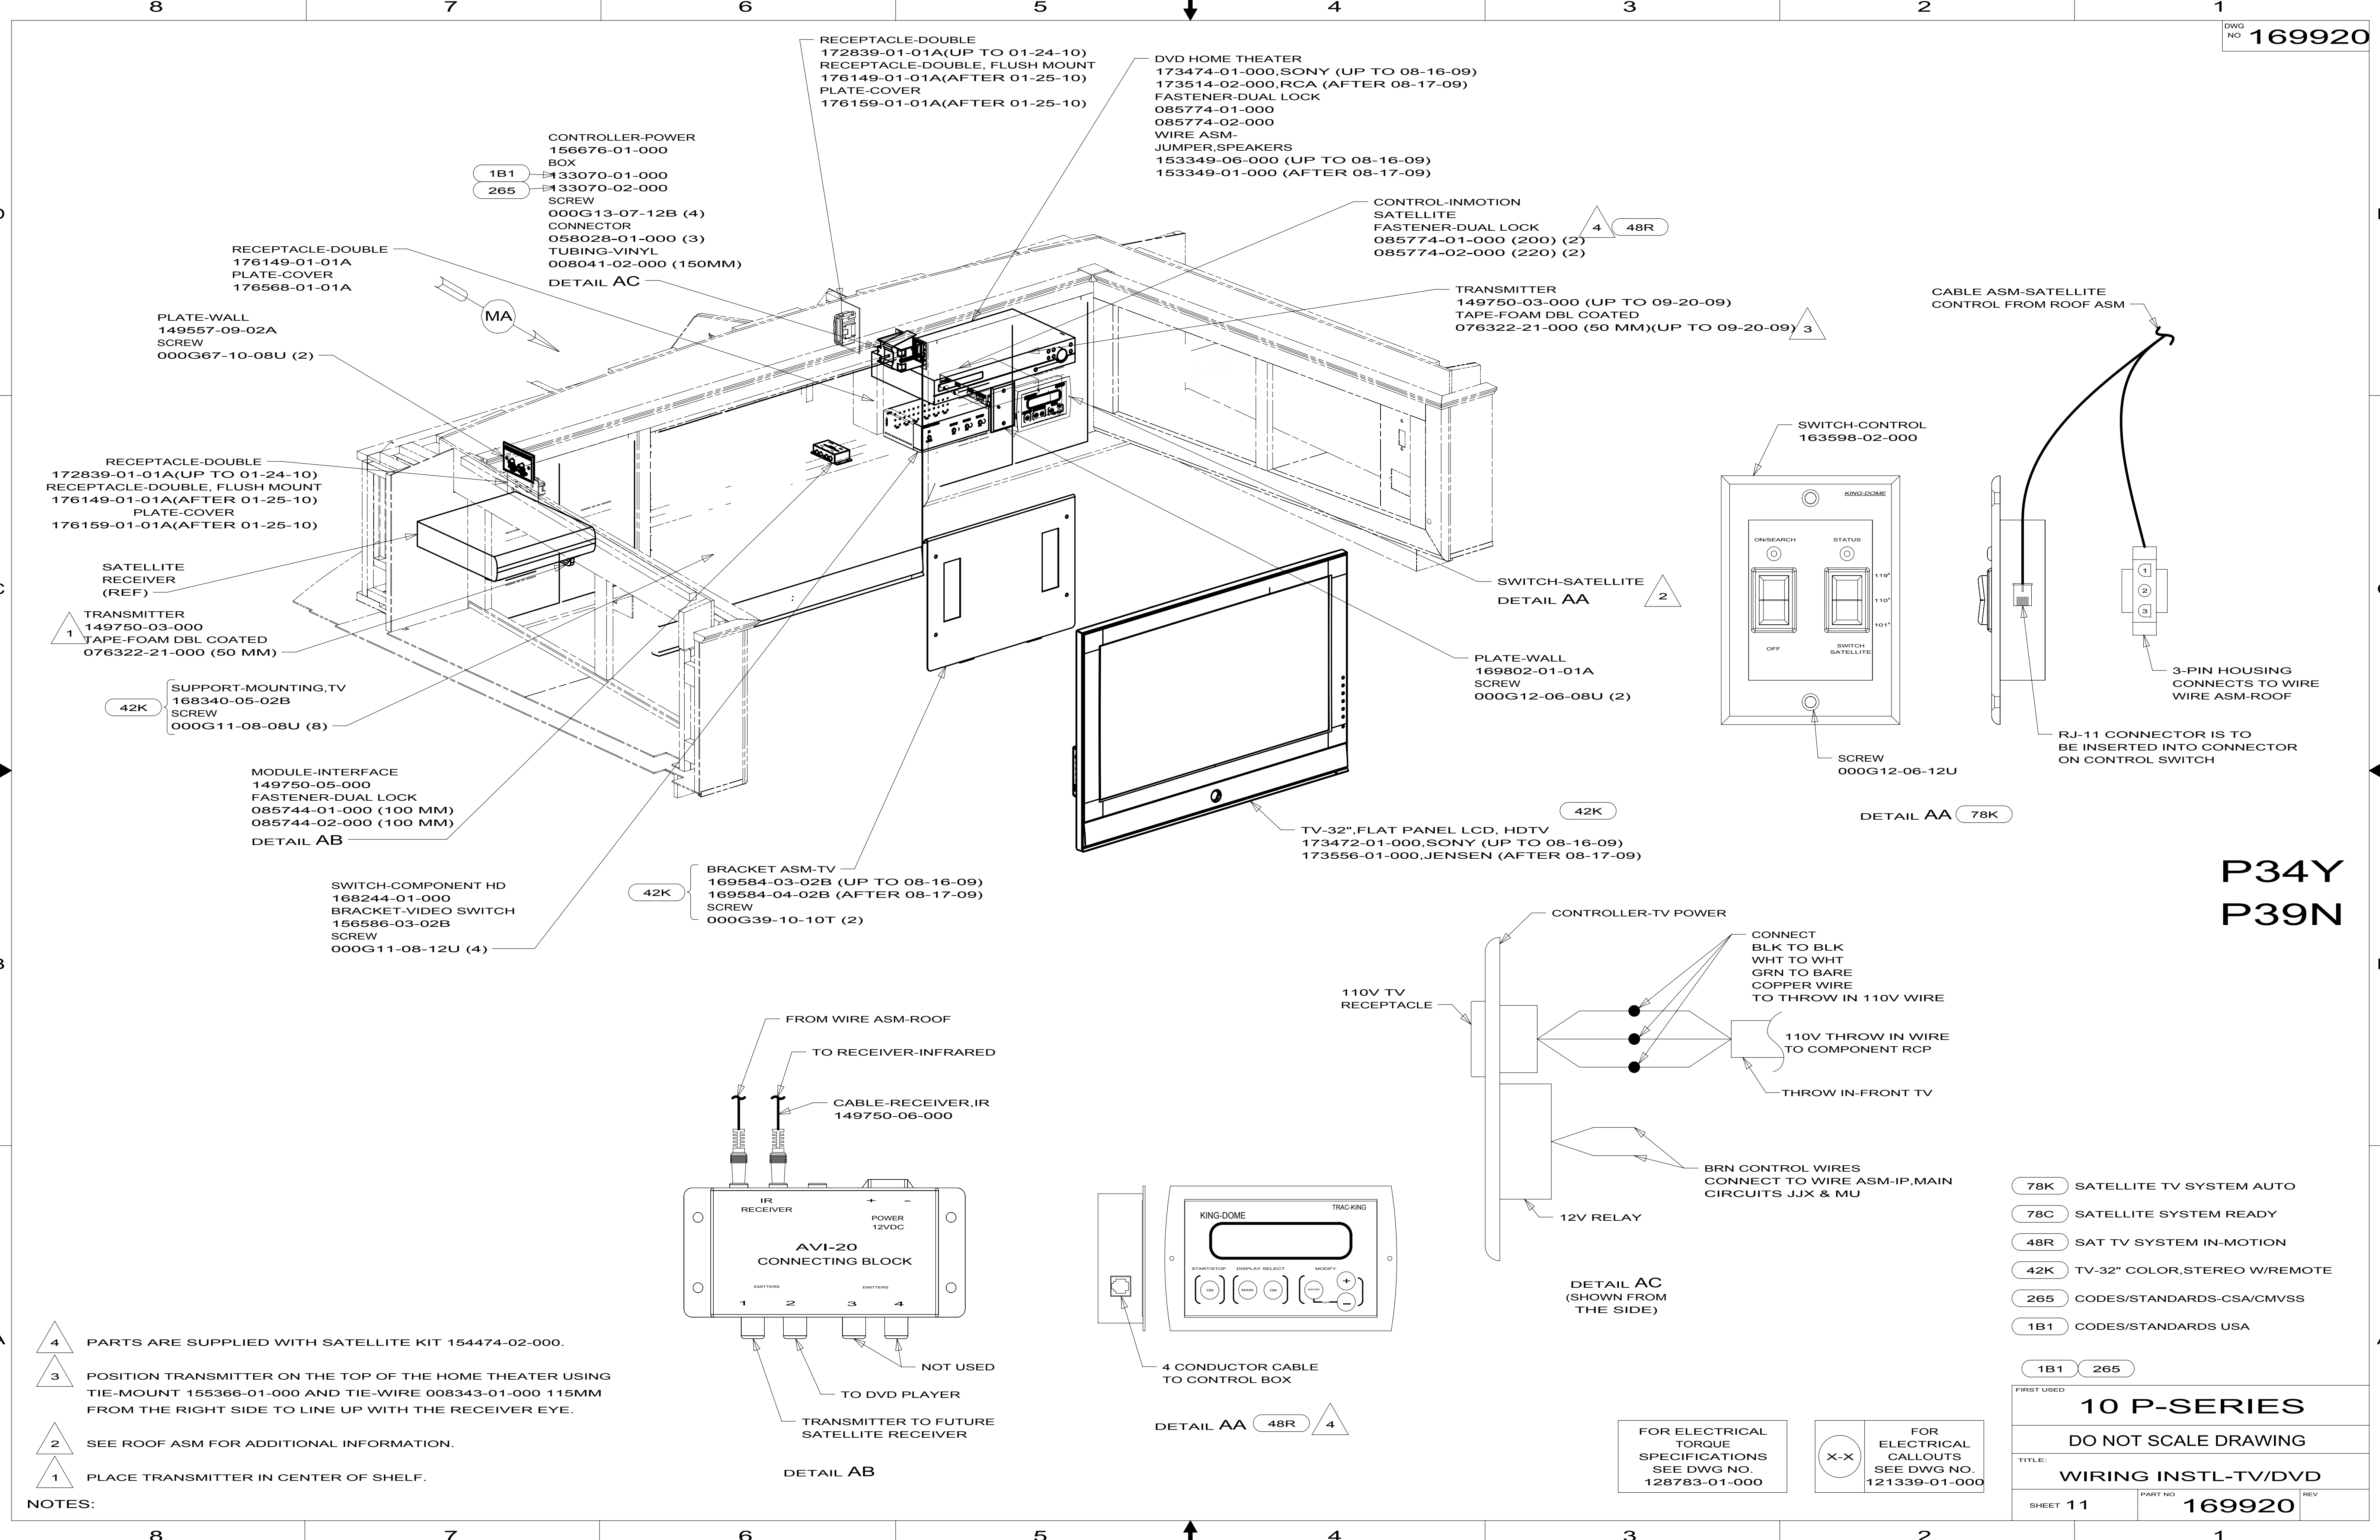

- 4 PARTS ARE SUPPLIED WITH SATELLITE KIT 154474-02-000.
- 3 POSITION TRANSMITTER ON THE TOP OF THE HOME THEATER USING TIE-MOUNT 155366-01-000 AND TIE-WIRE 008343-01-000 115MM FROM THE RIGHT SIDE TO LINE UP WITH THE RECEIVER EYE.
- 2 SEE ROOF ASM FOR ADDITIONAL INFORMATION.
- 1 PLACE TRANSMITTER IN CENTER OF SHELF.


NOTES:

78K	SATELLITE TV SYSTEM AUTO
78C	SATELLITE SYSTEM READY
48R	SAT TV SYSTEM IN-MOTION
42K	TV-32" COLOR,STEREO W/REMOTE
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265
FIRST USED	
10 P-SERIES	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-TV/DVD	
SHEET 11	PART NO 169920


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

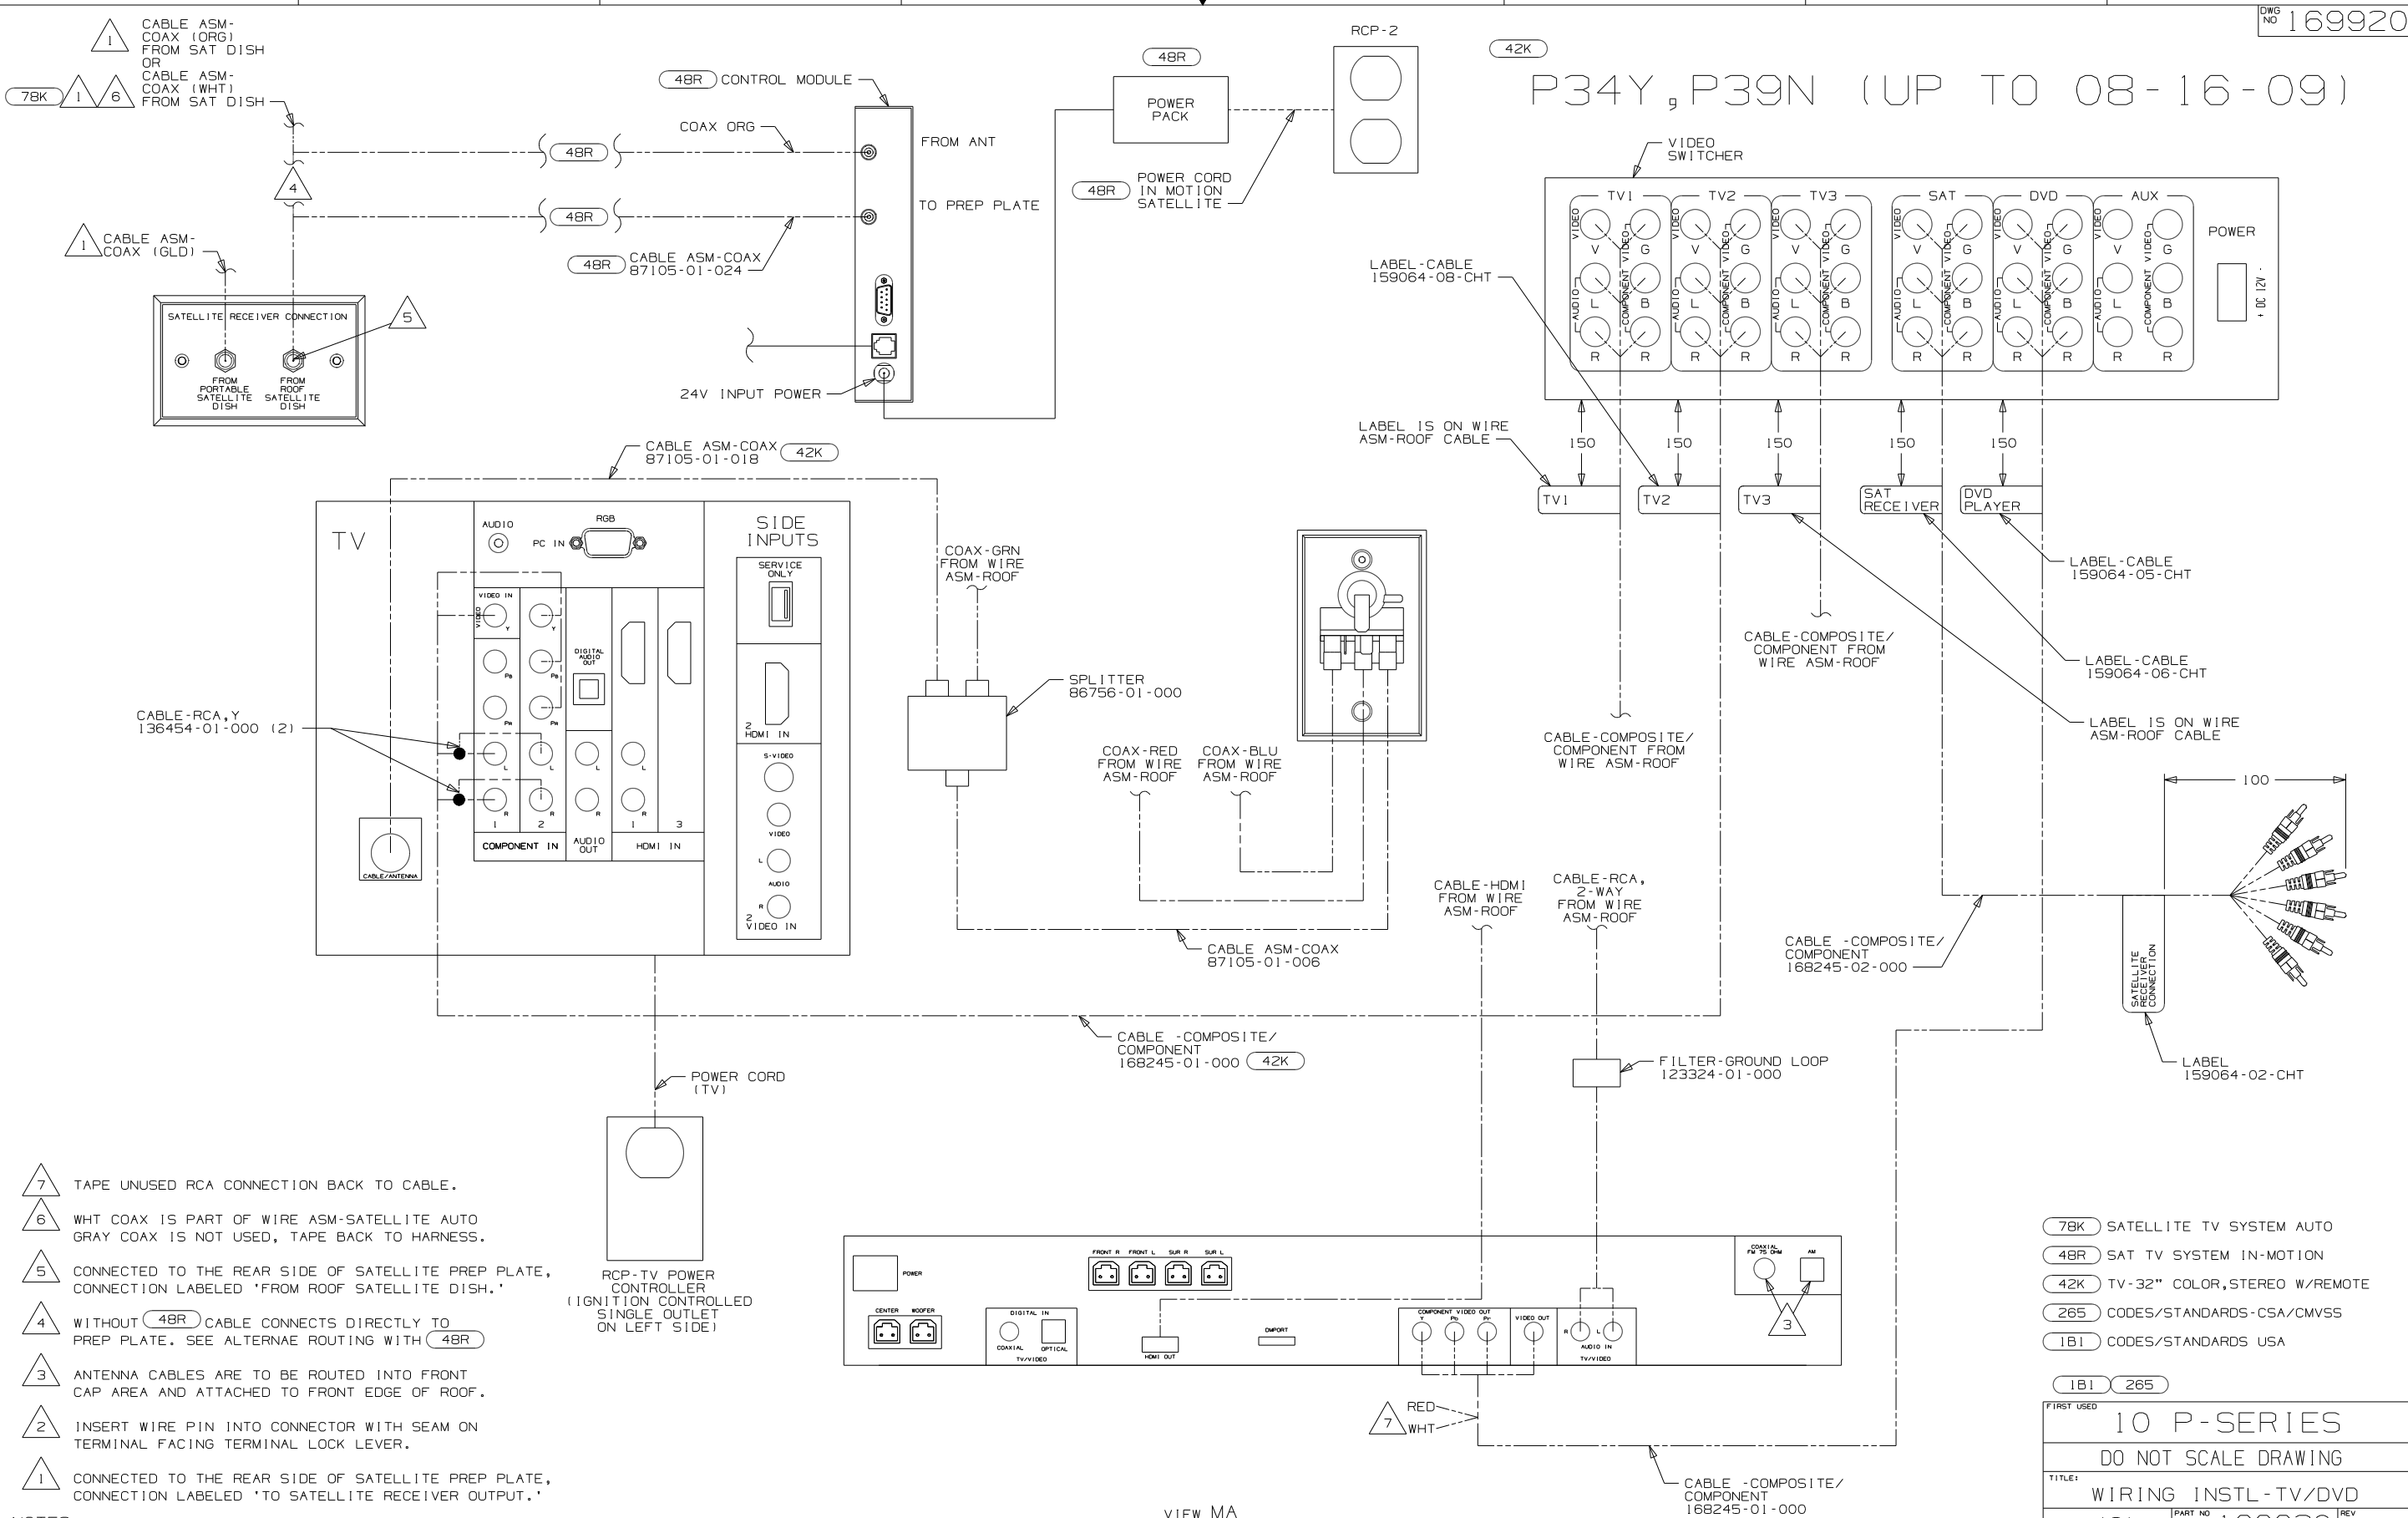


P34Y, P39N (AFTER 08-17-09)
(UP TO 09-20-09)

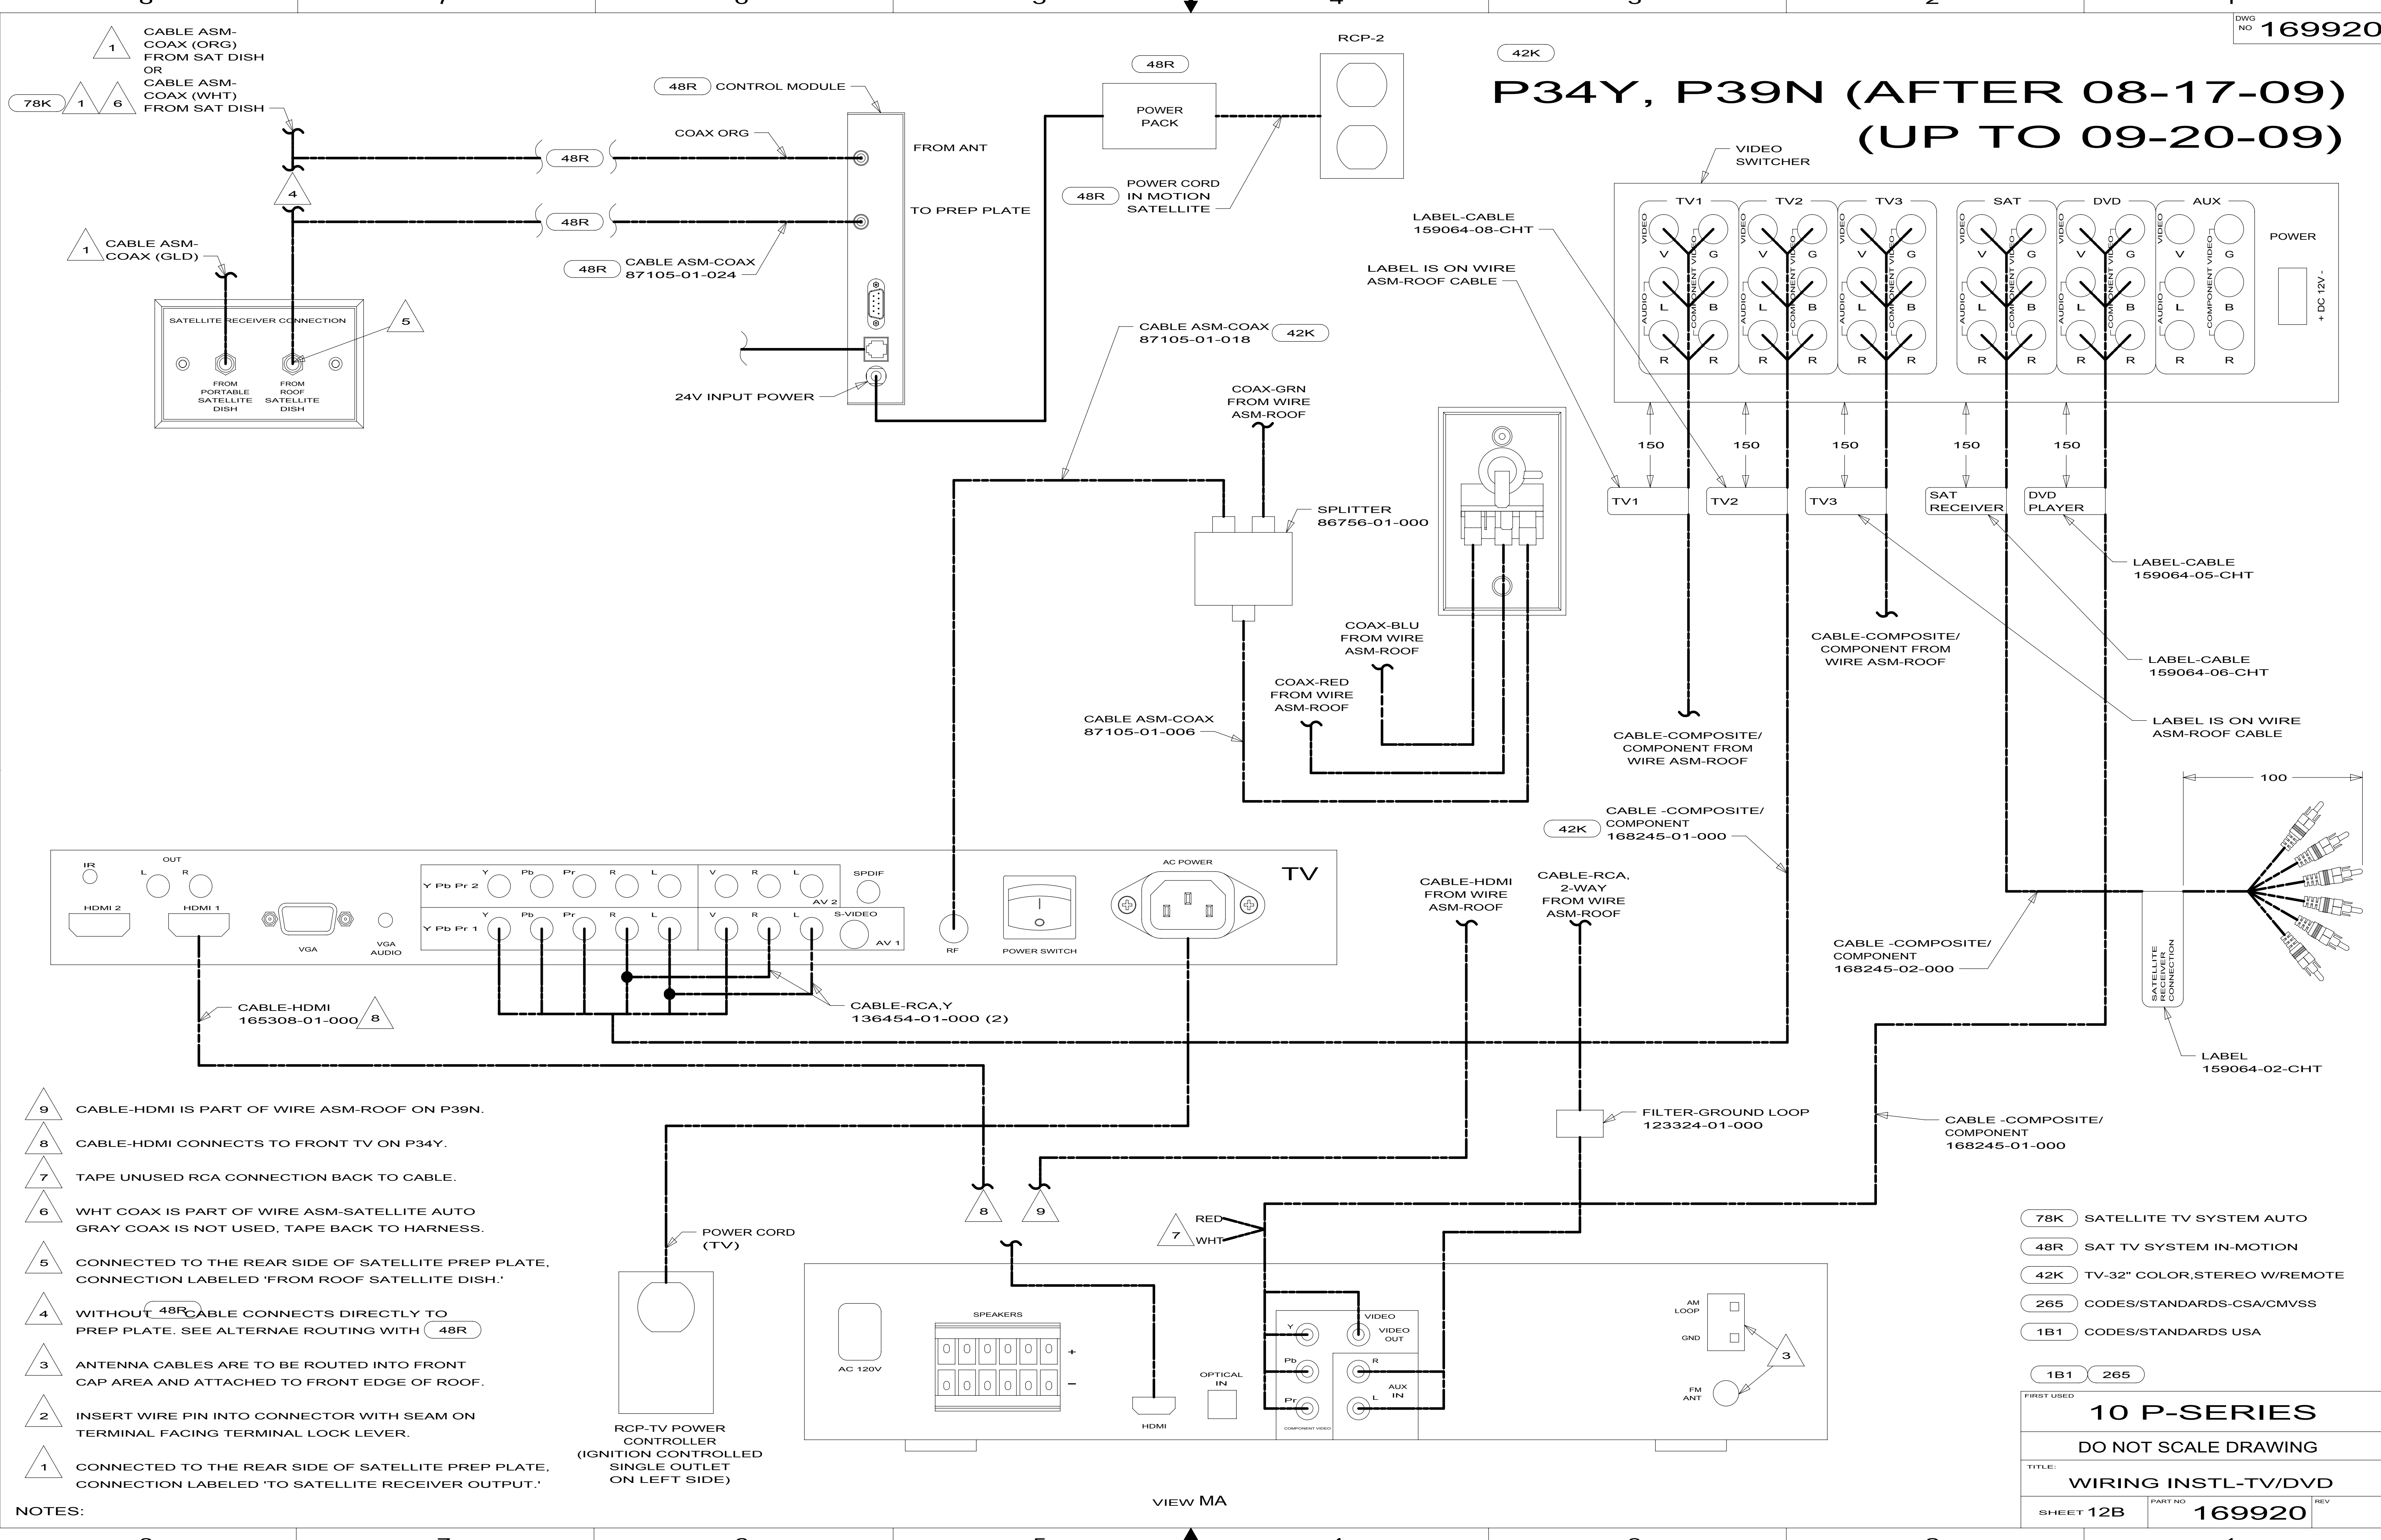

NOTES:


FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-TV/DVD		
SHEET 12B	PART NO 169920	REV


P34Y, P39N (AFTER 09-21-09)

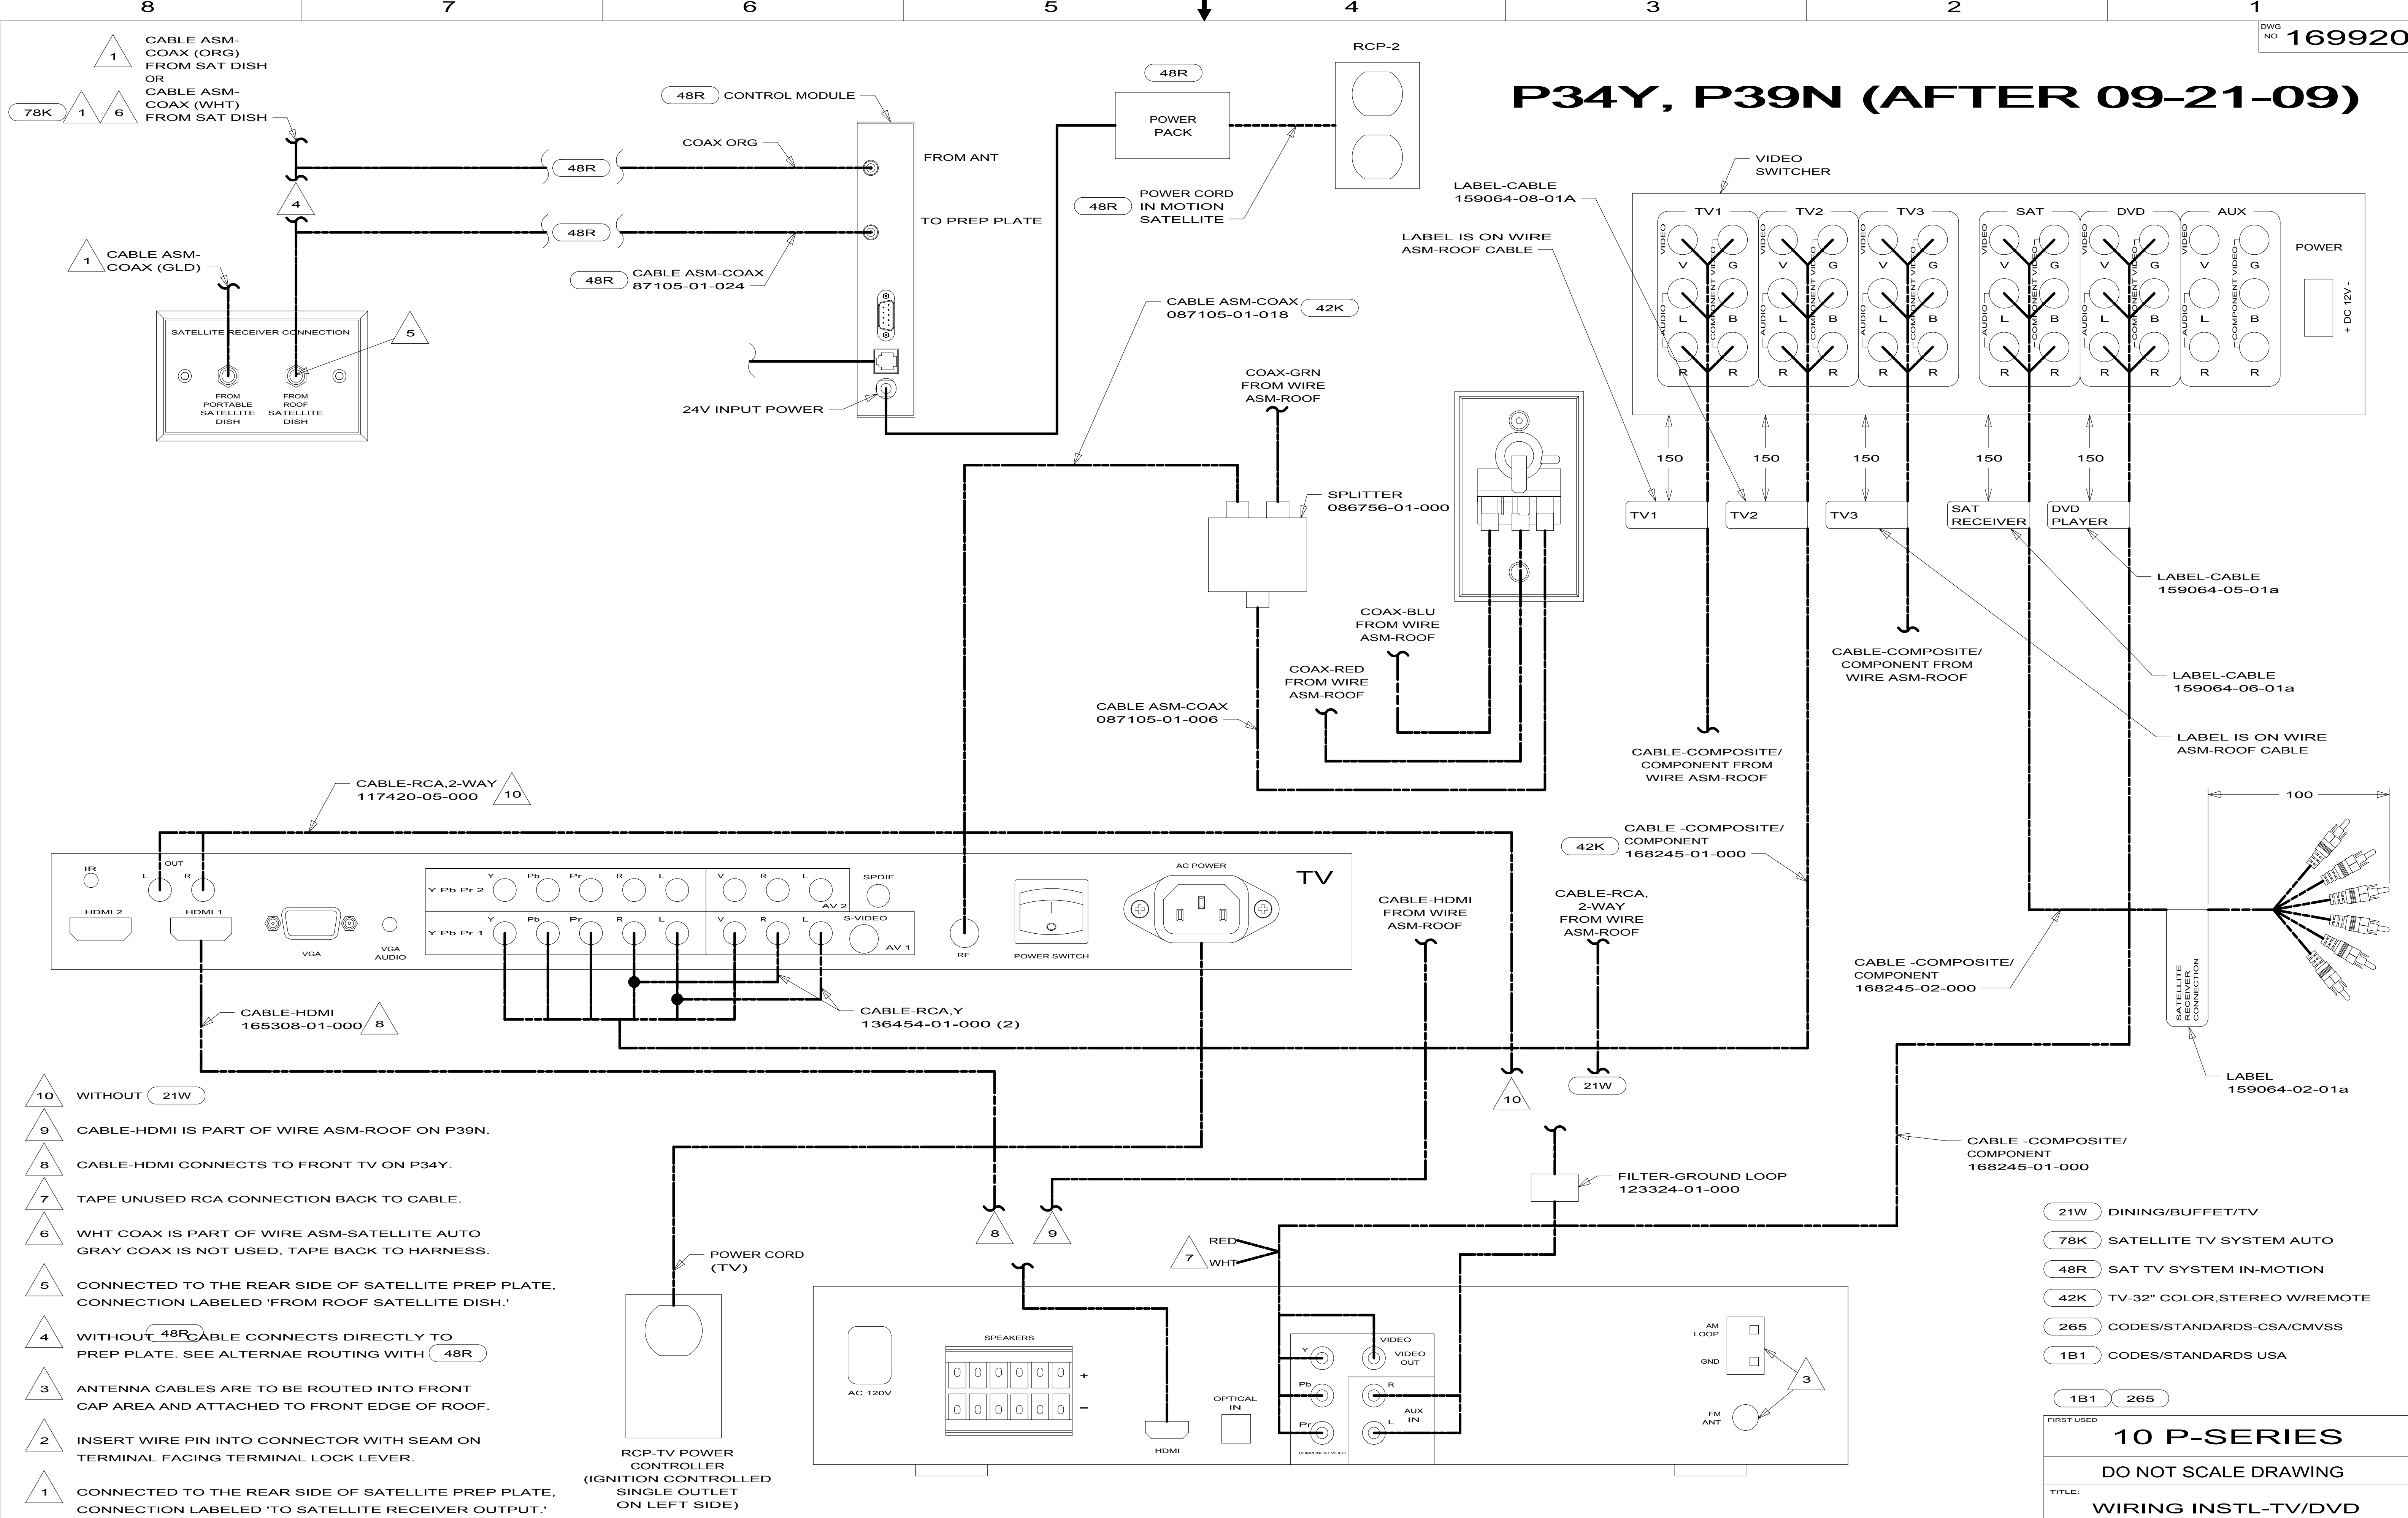

NOTES:

21W	DINING/BUFFET/TV
78K	SATELLITE TV SYSTEM AUTO
48R	SAT TV SYSTEM IN-MOTION
42K	TV-32" COLOR,STEREO W/REMOTE
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265
FIRST USED	
10 P-SERIES	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-TV/DVD	
SHEET 12C	PART NO 169920
REV	

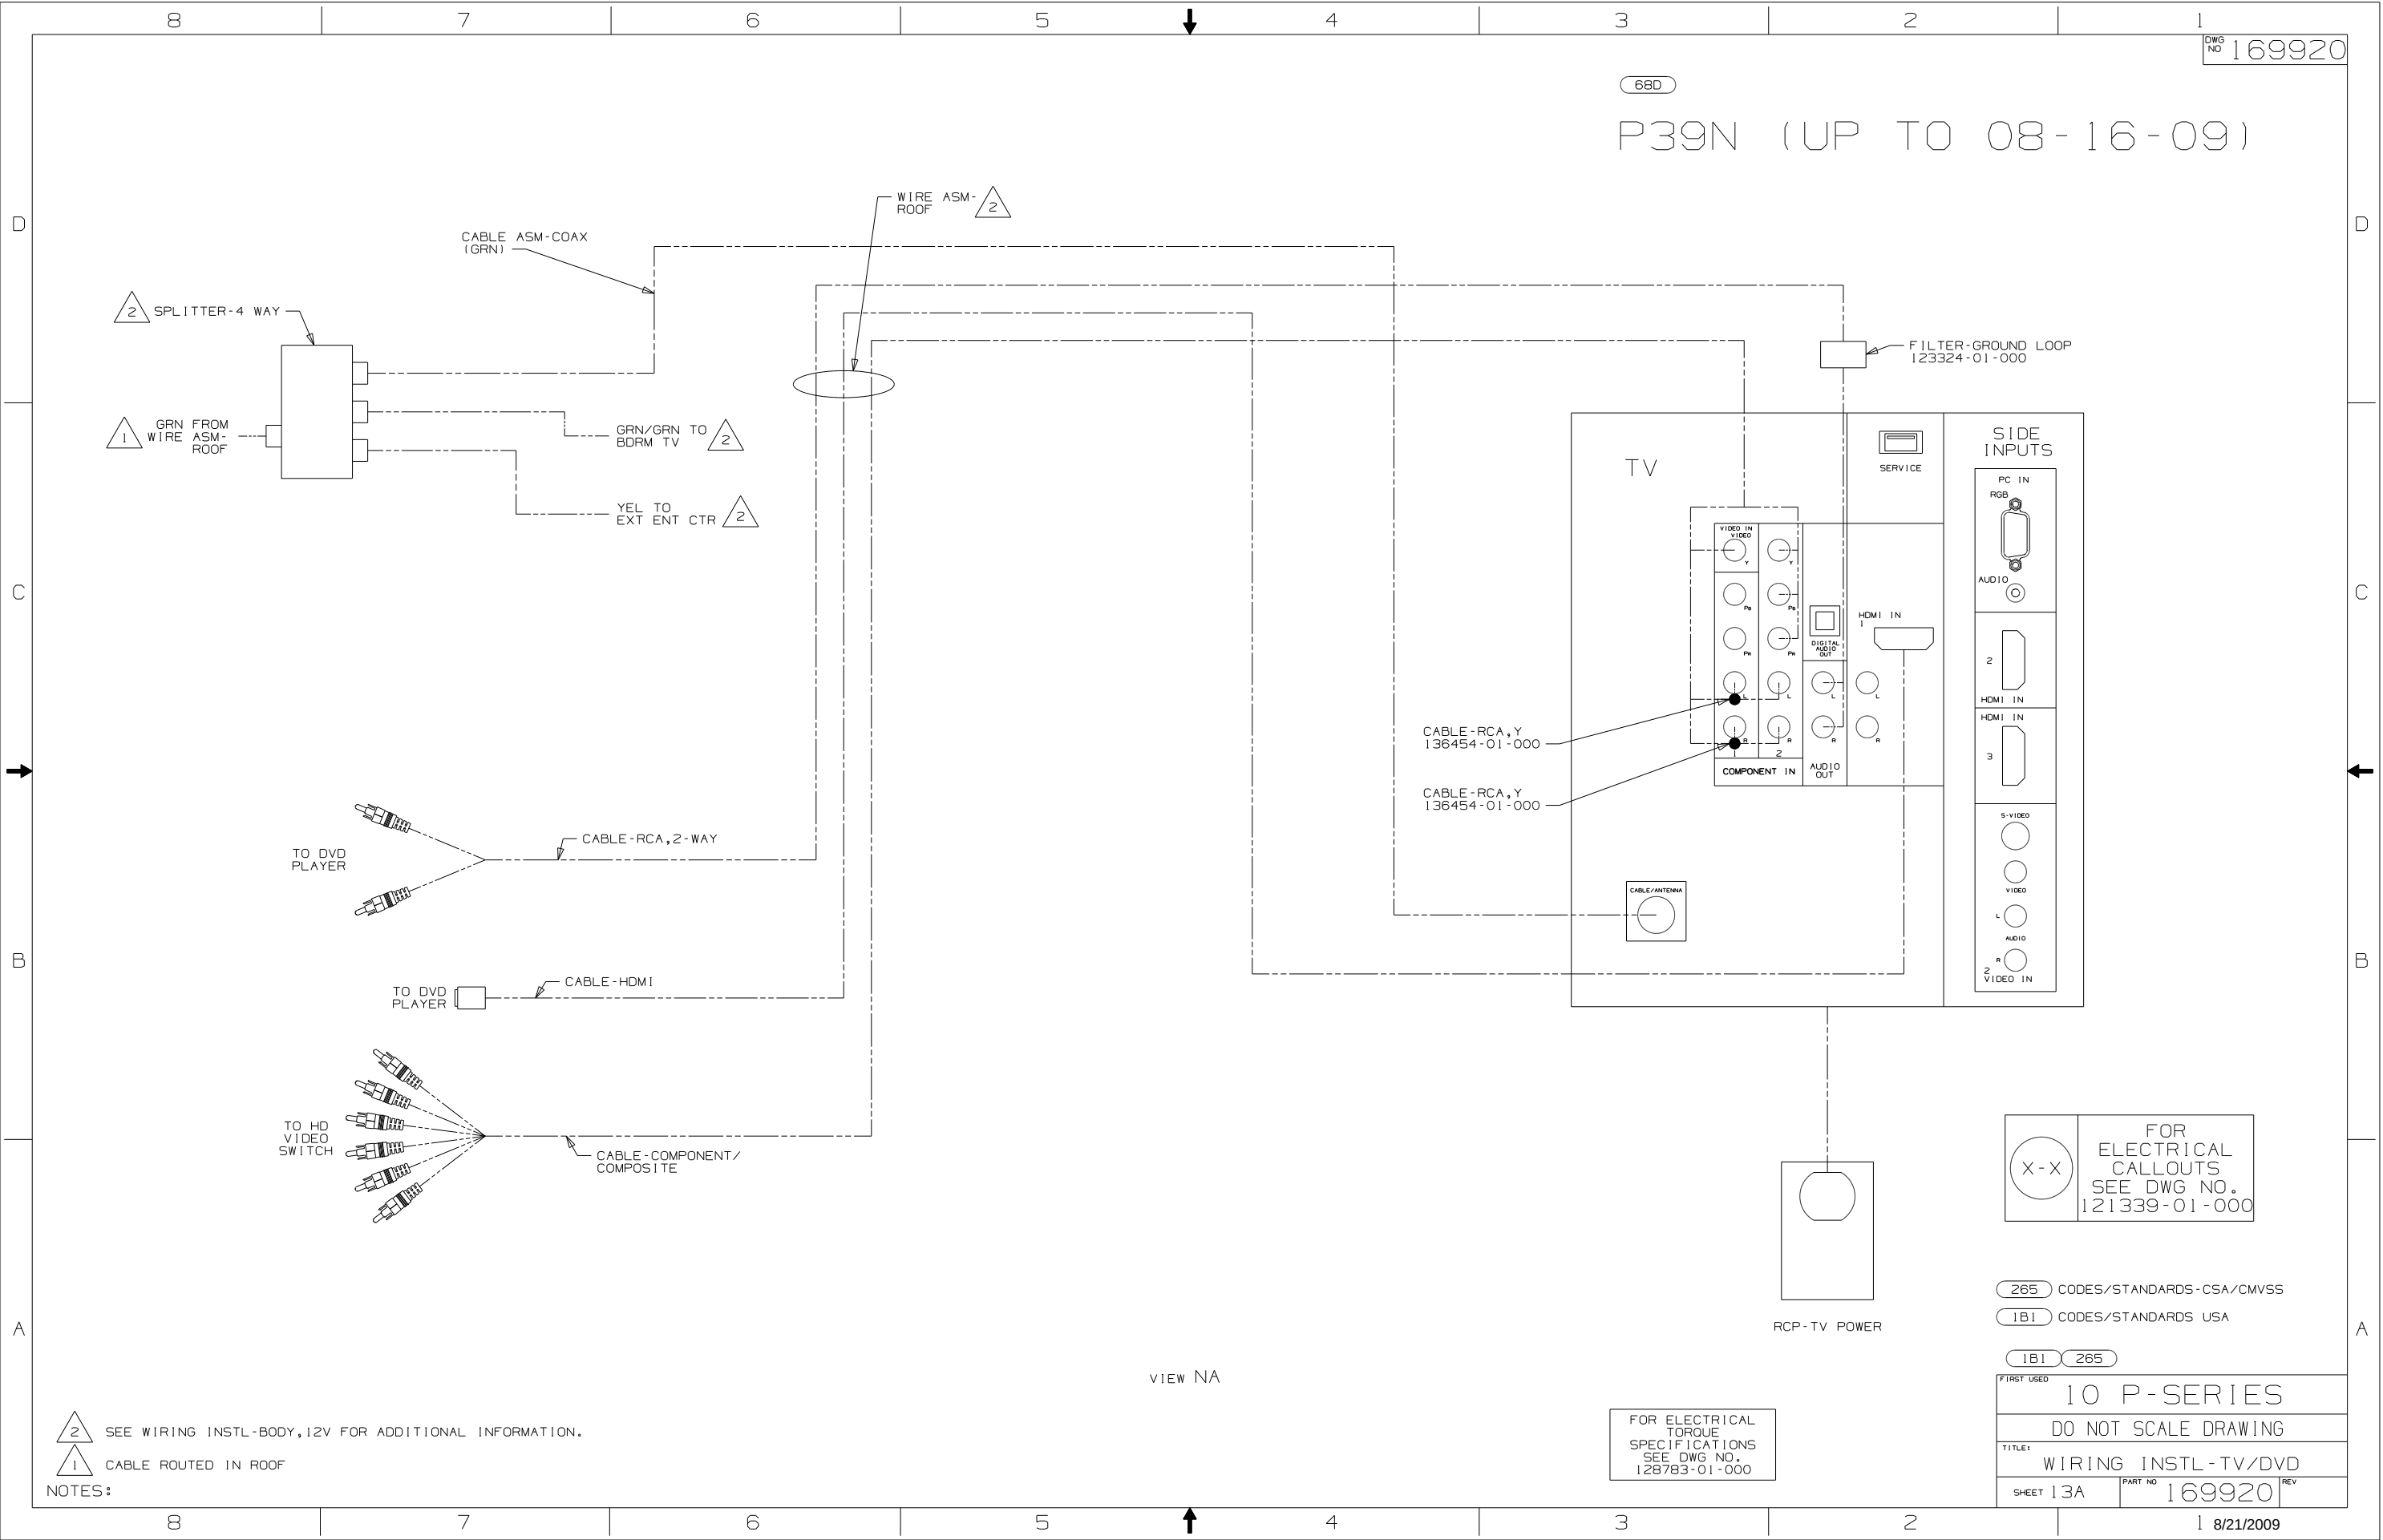


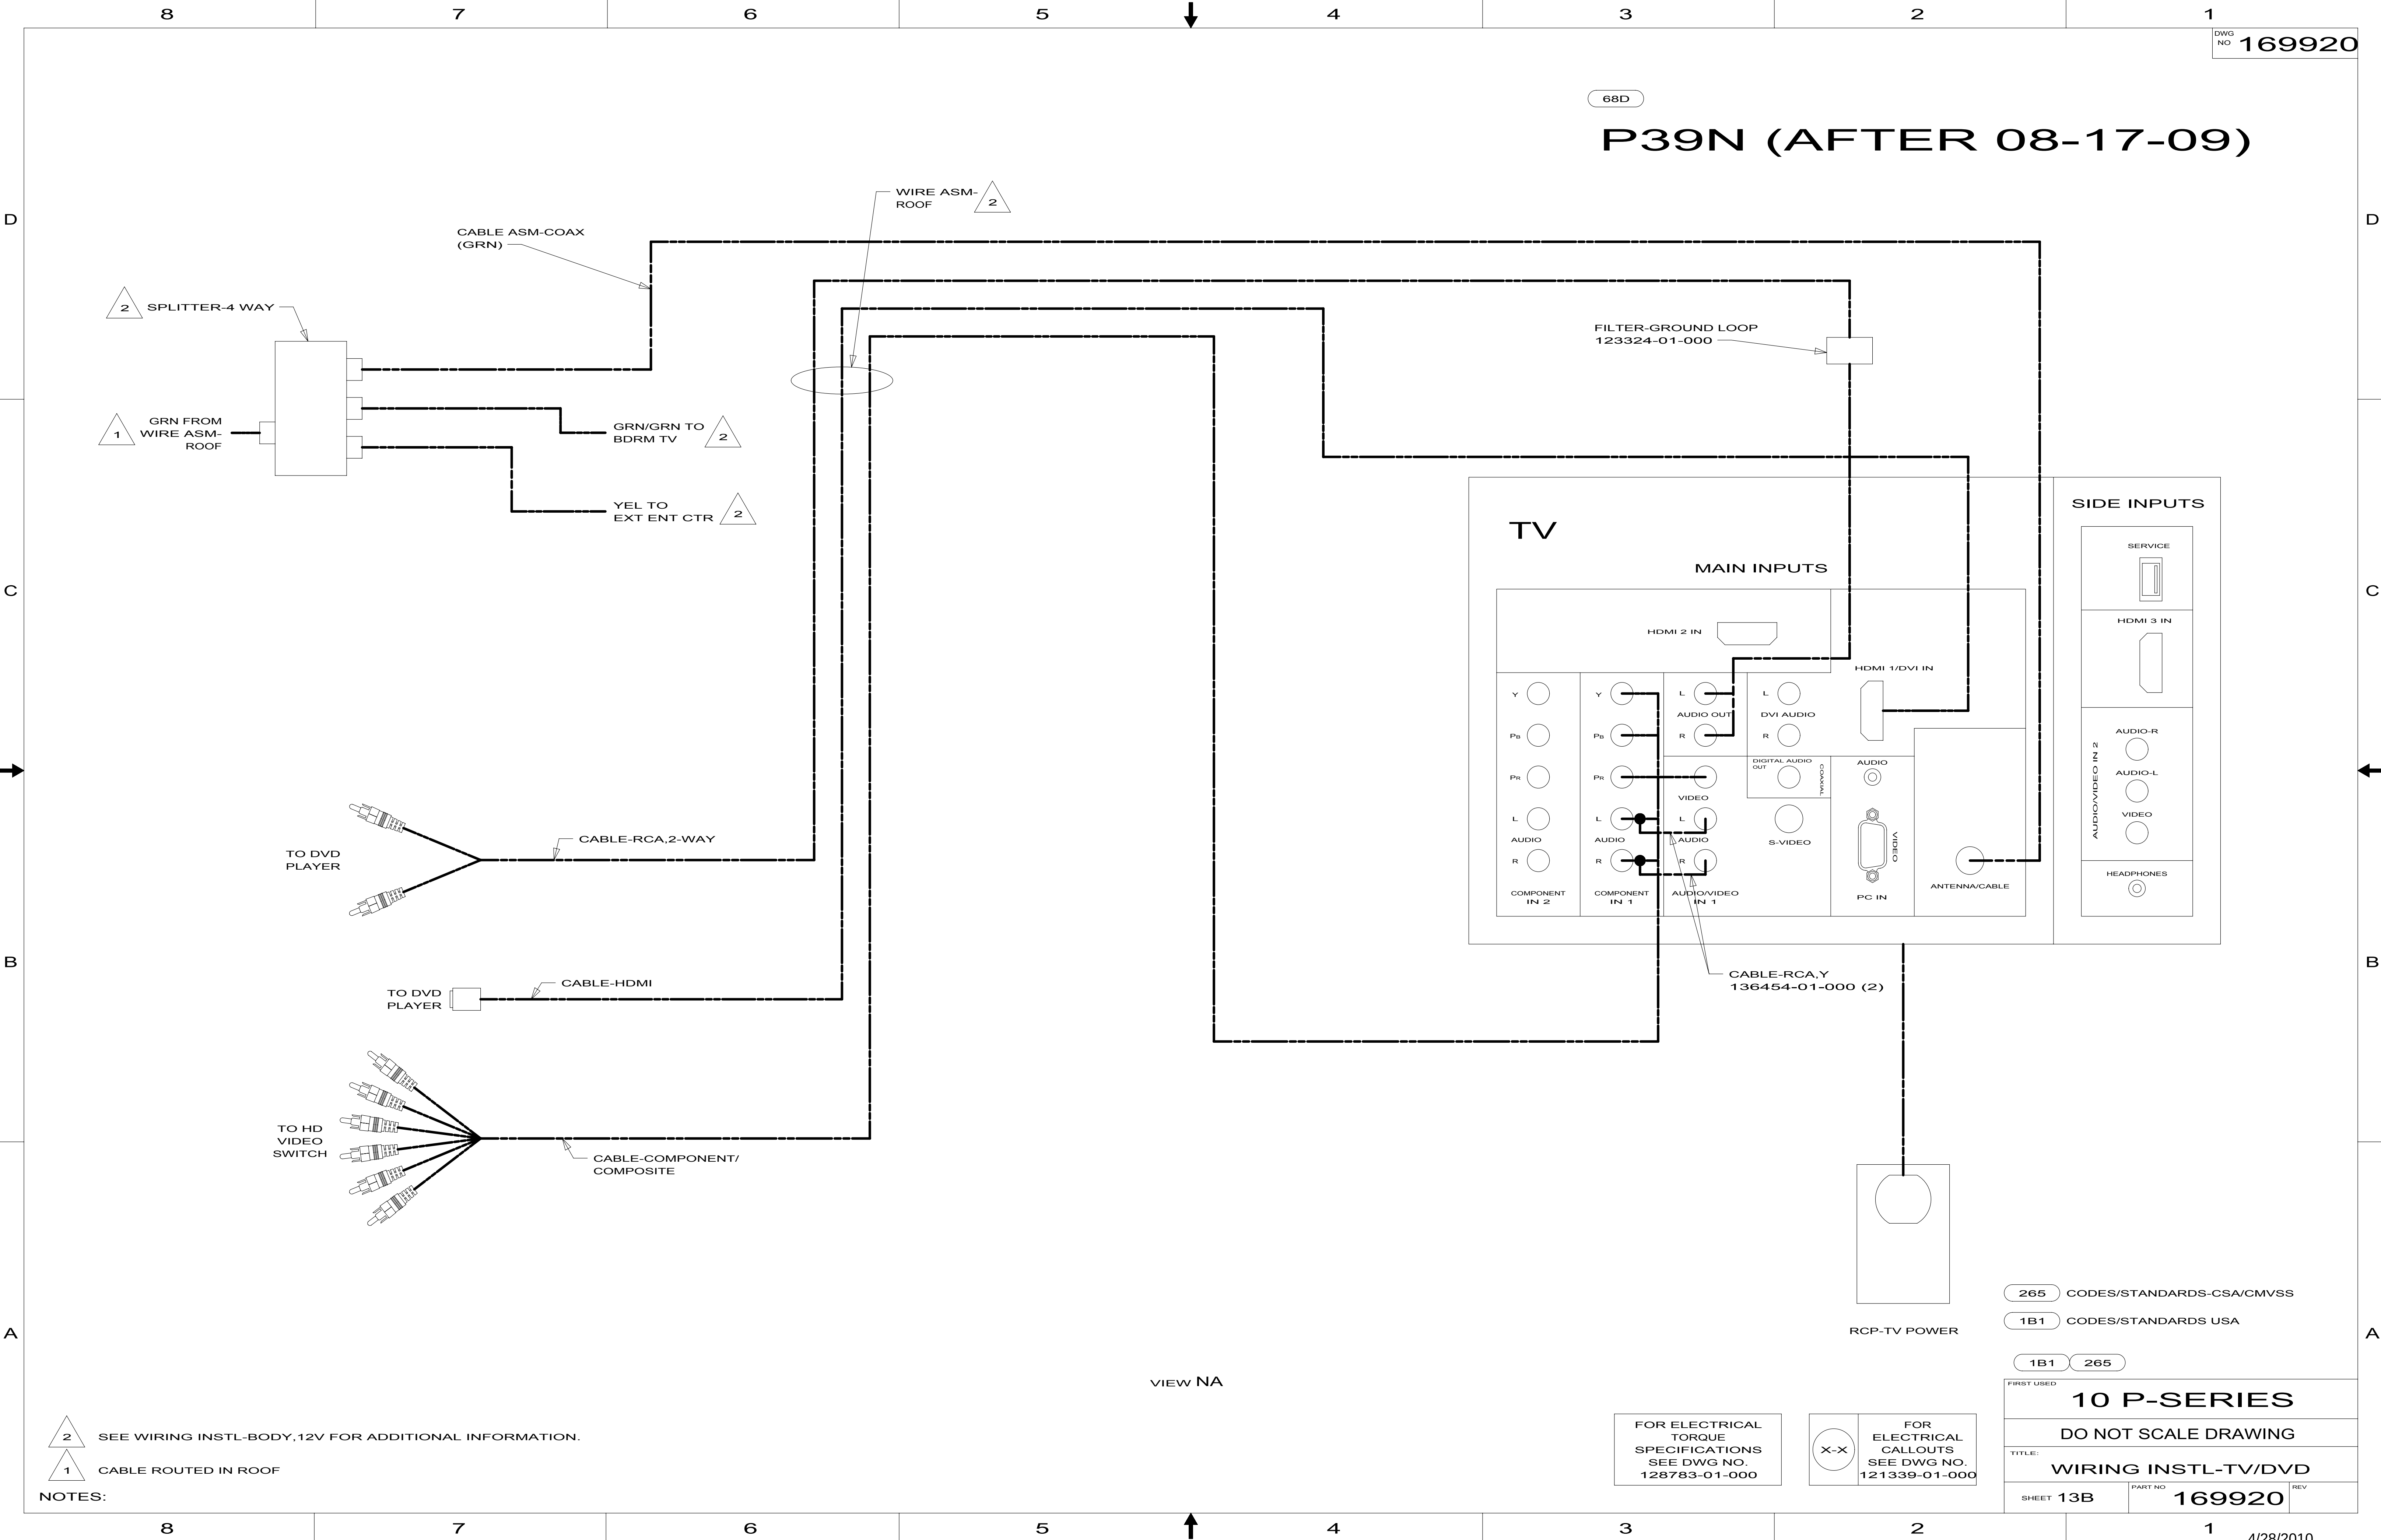


68D

P39N (AFTER 08-17-09)


SIDE INPUTS

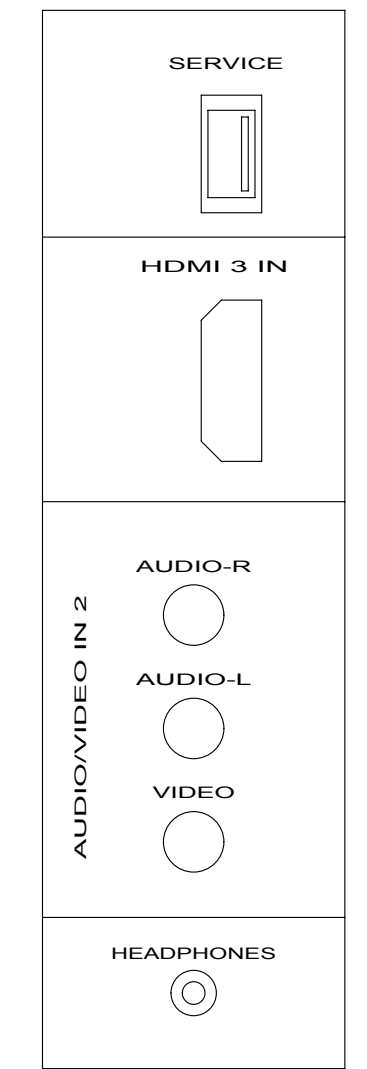

MAIN INPUTS

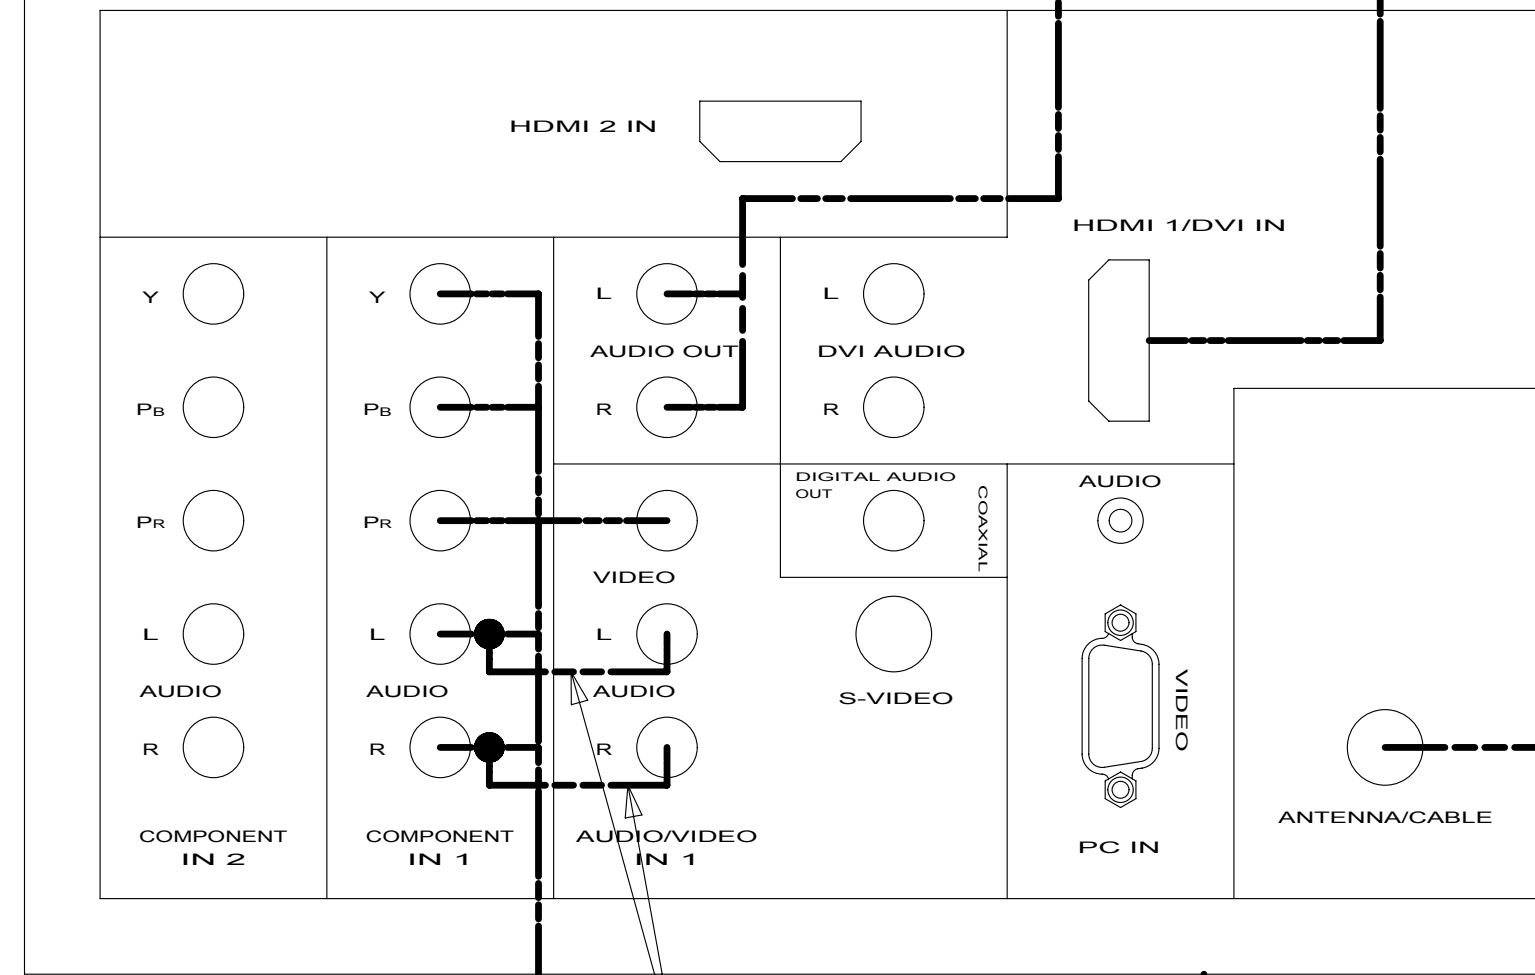

CABLE-RCA, Y
136454-01-000 (2)

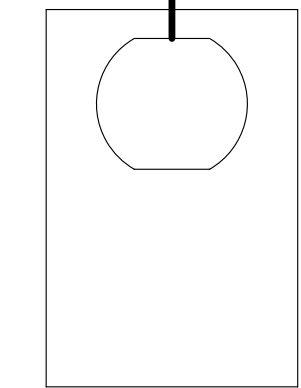

RCP-TV POWER

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-TV/DVD		
SHEET 13B	PART NO	REV
	169920	

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	171727-01-700	EA	REMOTE	171727-01-000 PR7ATSC