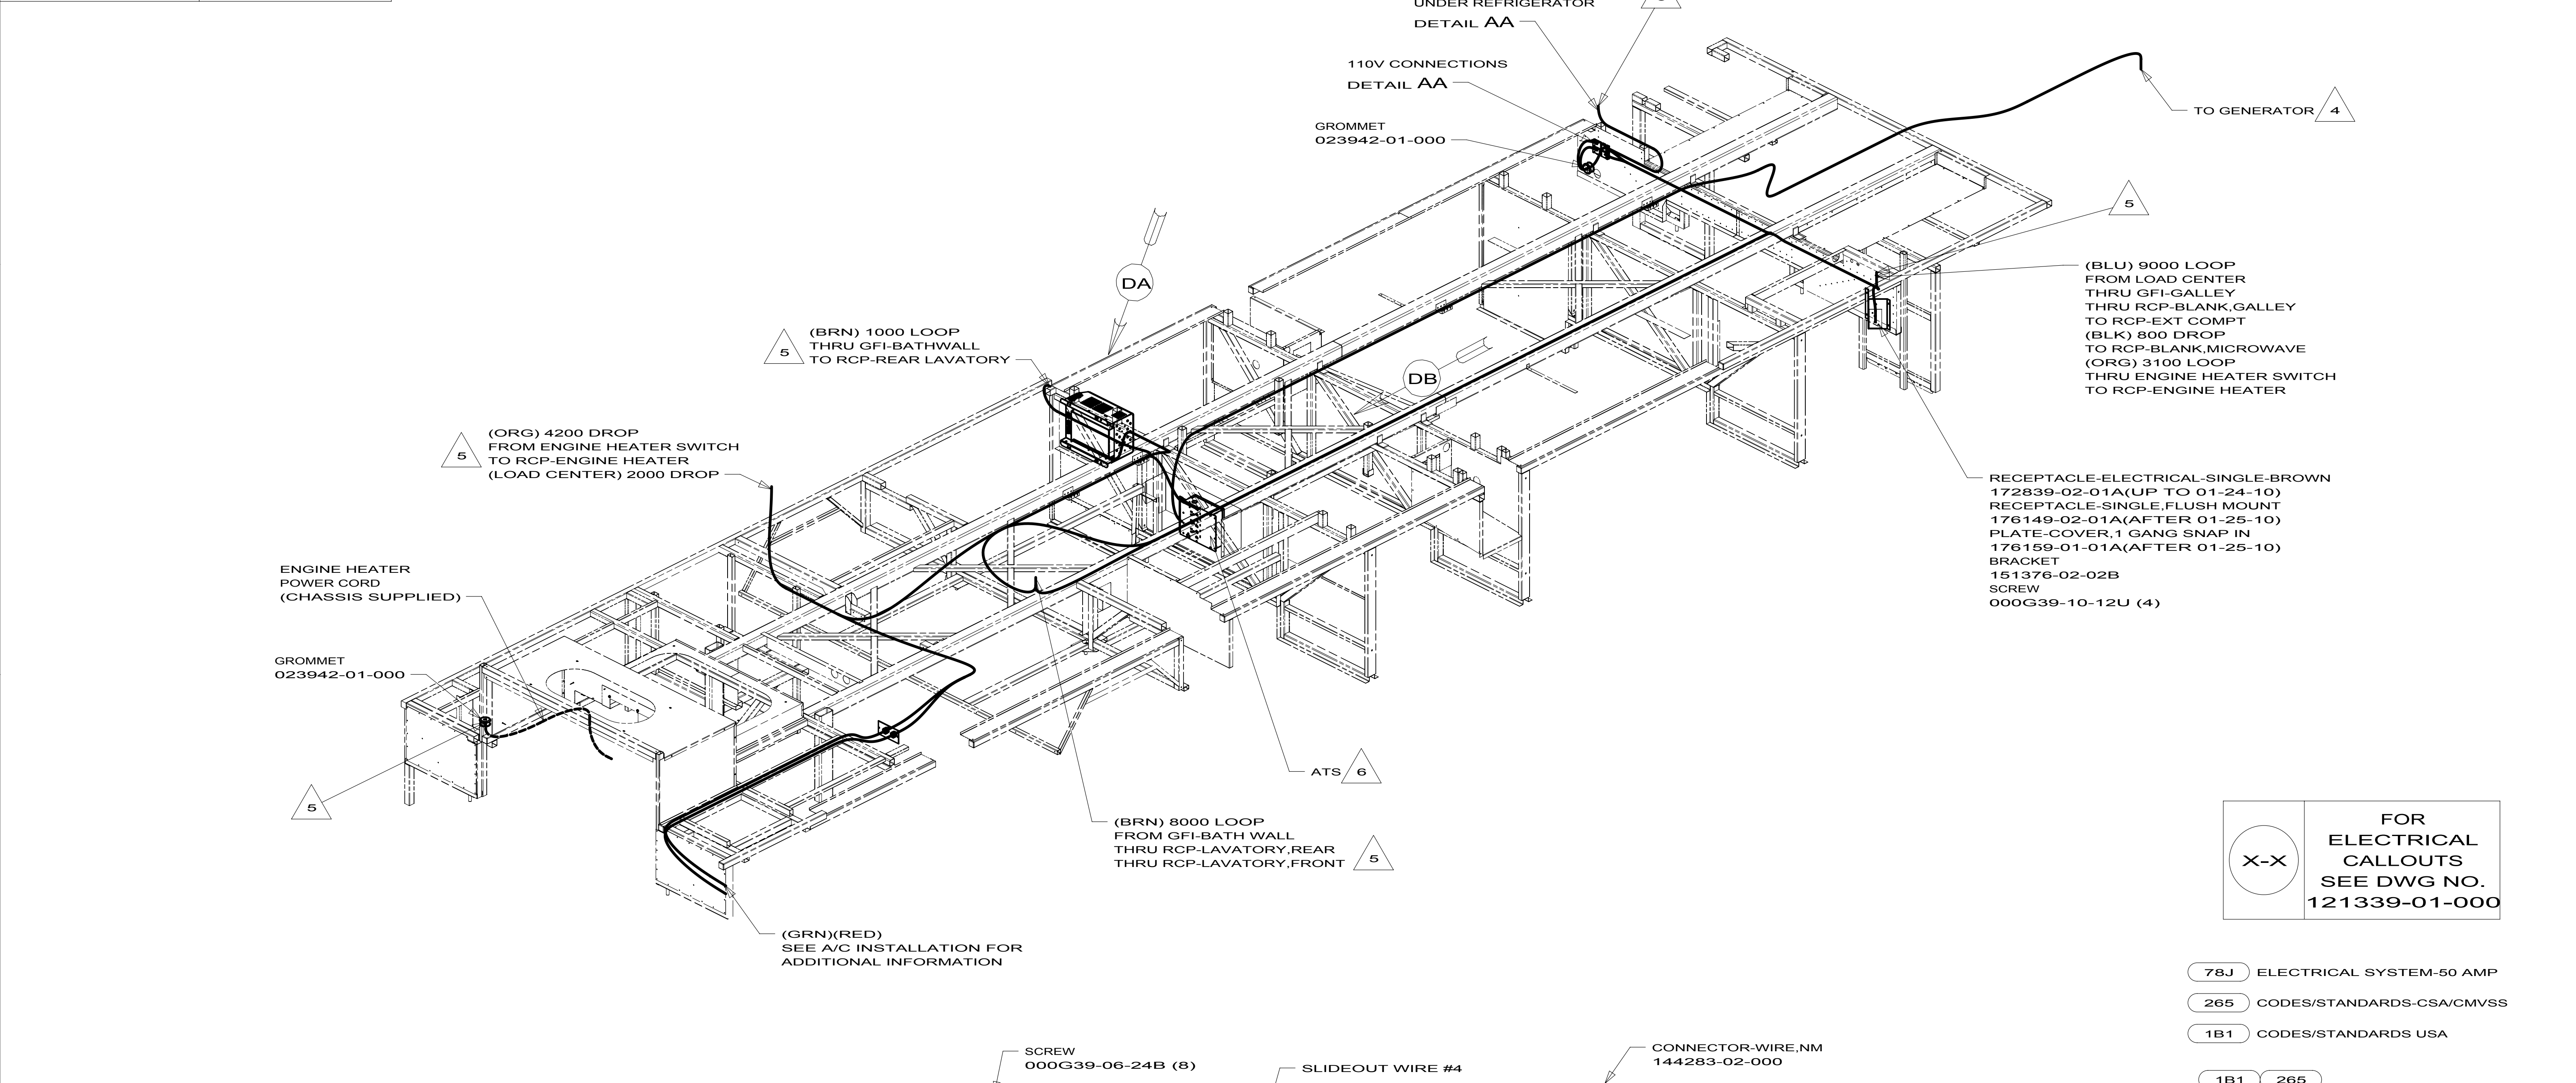
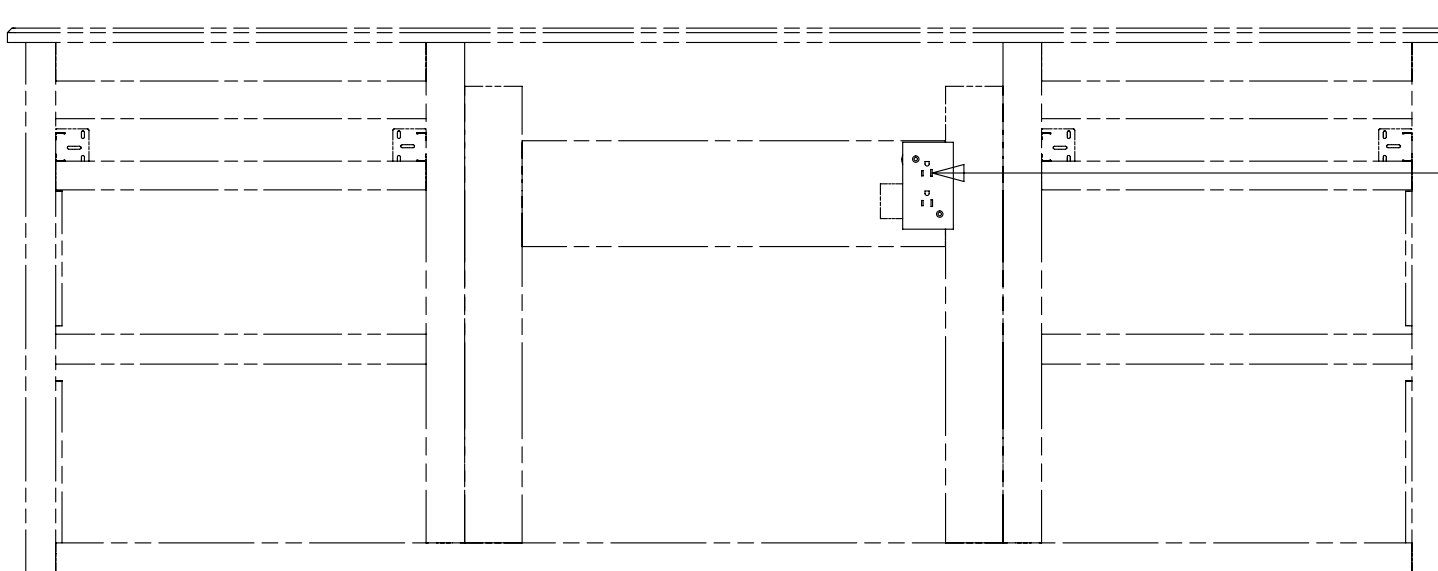
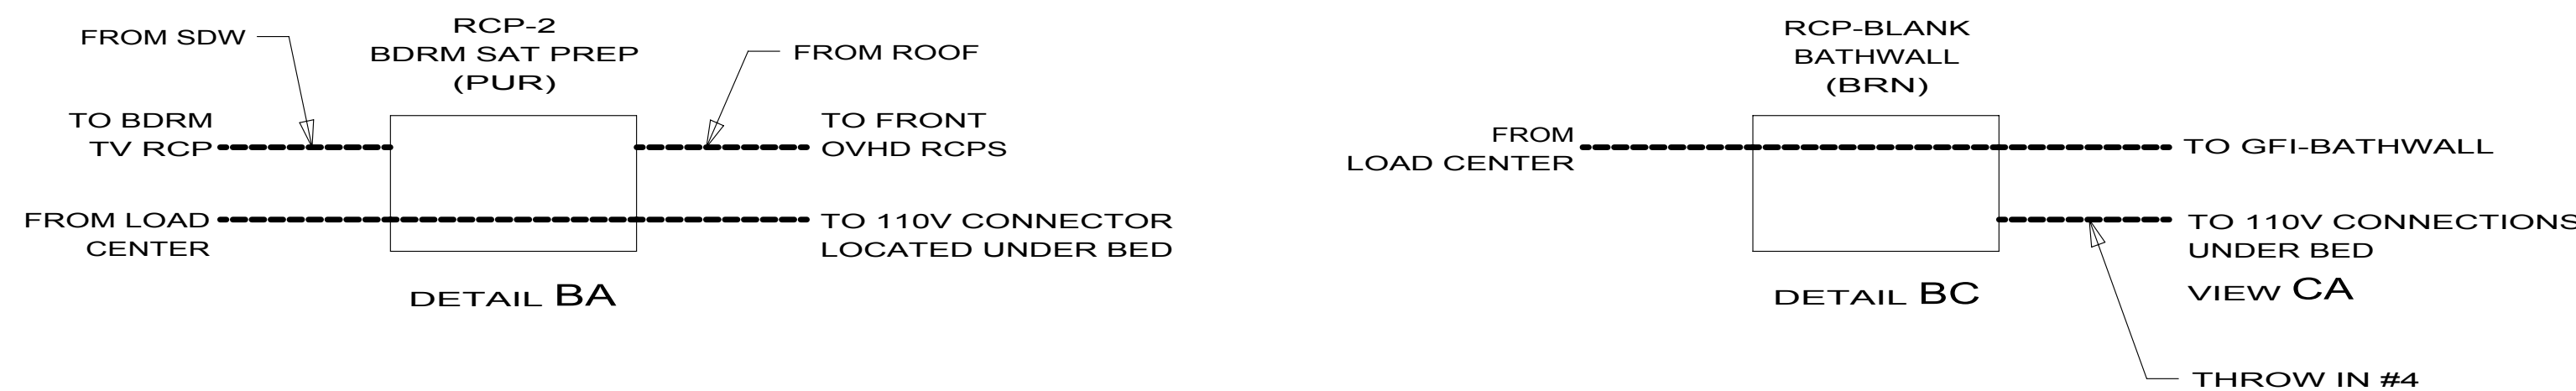




RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE,FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)

RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE,FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)
SPACER
133713-23-XXX
SCREW
000G11-08-20D (4)

RECEPTACLE-SINGLE, BRN
058707-01-000(UP TO 01-24-10)
RECEPTACLE-SINGLE,SURFACE MOUNT
176156-01-01A(AFTER 01-25-10)

110V CONNECTIONS
DETAIL AA

COVER-WIRE
153862-02-01A
155469-01-01A
SCREW
000G67-10-12B (4)

RECEPTACLE-SINGLE, BRN
058707-02-000(UP TO 01-24-10)
RECEPTACLE-BLANK,JUNCTION
176158-01-01A(AFTER 01-25-10)

LOAD CENTER/ATS ASM
171529-01-000

RCP-BDRM TV
(REF)

RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE,FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)
DETAIL BA
LABEL
158542-02-01A

RECEPTACLE-DUPLEX
172839-02-01A(UP TO 01-24-10)
RECEPTACLE-SINGLE,FLUSH MOUNT
176149-02-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)
LABEL
158542-01-01A

RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE,FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER,1 GANG, SNAP IN
176159-01-01A(AFTER 01-25-10)

(WHT)
TO WATER HEATER

ENGINE BLOCK
HEATER CORD
(CHASSIS SUPPLIED)

RECEPTACLE
163319-01-02A
BOX
133070-01-000(US)
133070-02-000(CAN)
SCREW
000G13-07-12B(4)
CONNECTOR
008313-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


- 61K TV(REAR)-26" COLOR STEREO
- 14W DINETTE
- 21P DINING TABLE/BUFFET & CHAIRS
- 21L DINING TABLE/CHAIRS
- 21M WASHER/DRYER PREP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 P40T		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,110V		
SHEET 2	PART NO. 172497	REV

- 5 RECEPTACLE MOUNTED ON BACKWALL.
- 4 SEE VIEW DC.
- 3 WIRES ROUTE THROUGH FLOOR IN THIS AREA.

- ALL 110V WIRES TO BE CLAMPED WITH CLAMP 010497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW 000G67-10-12B.
- ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

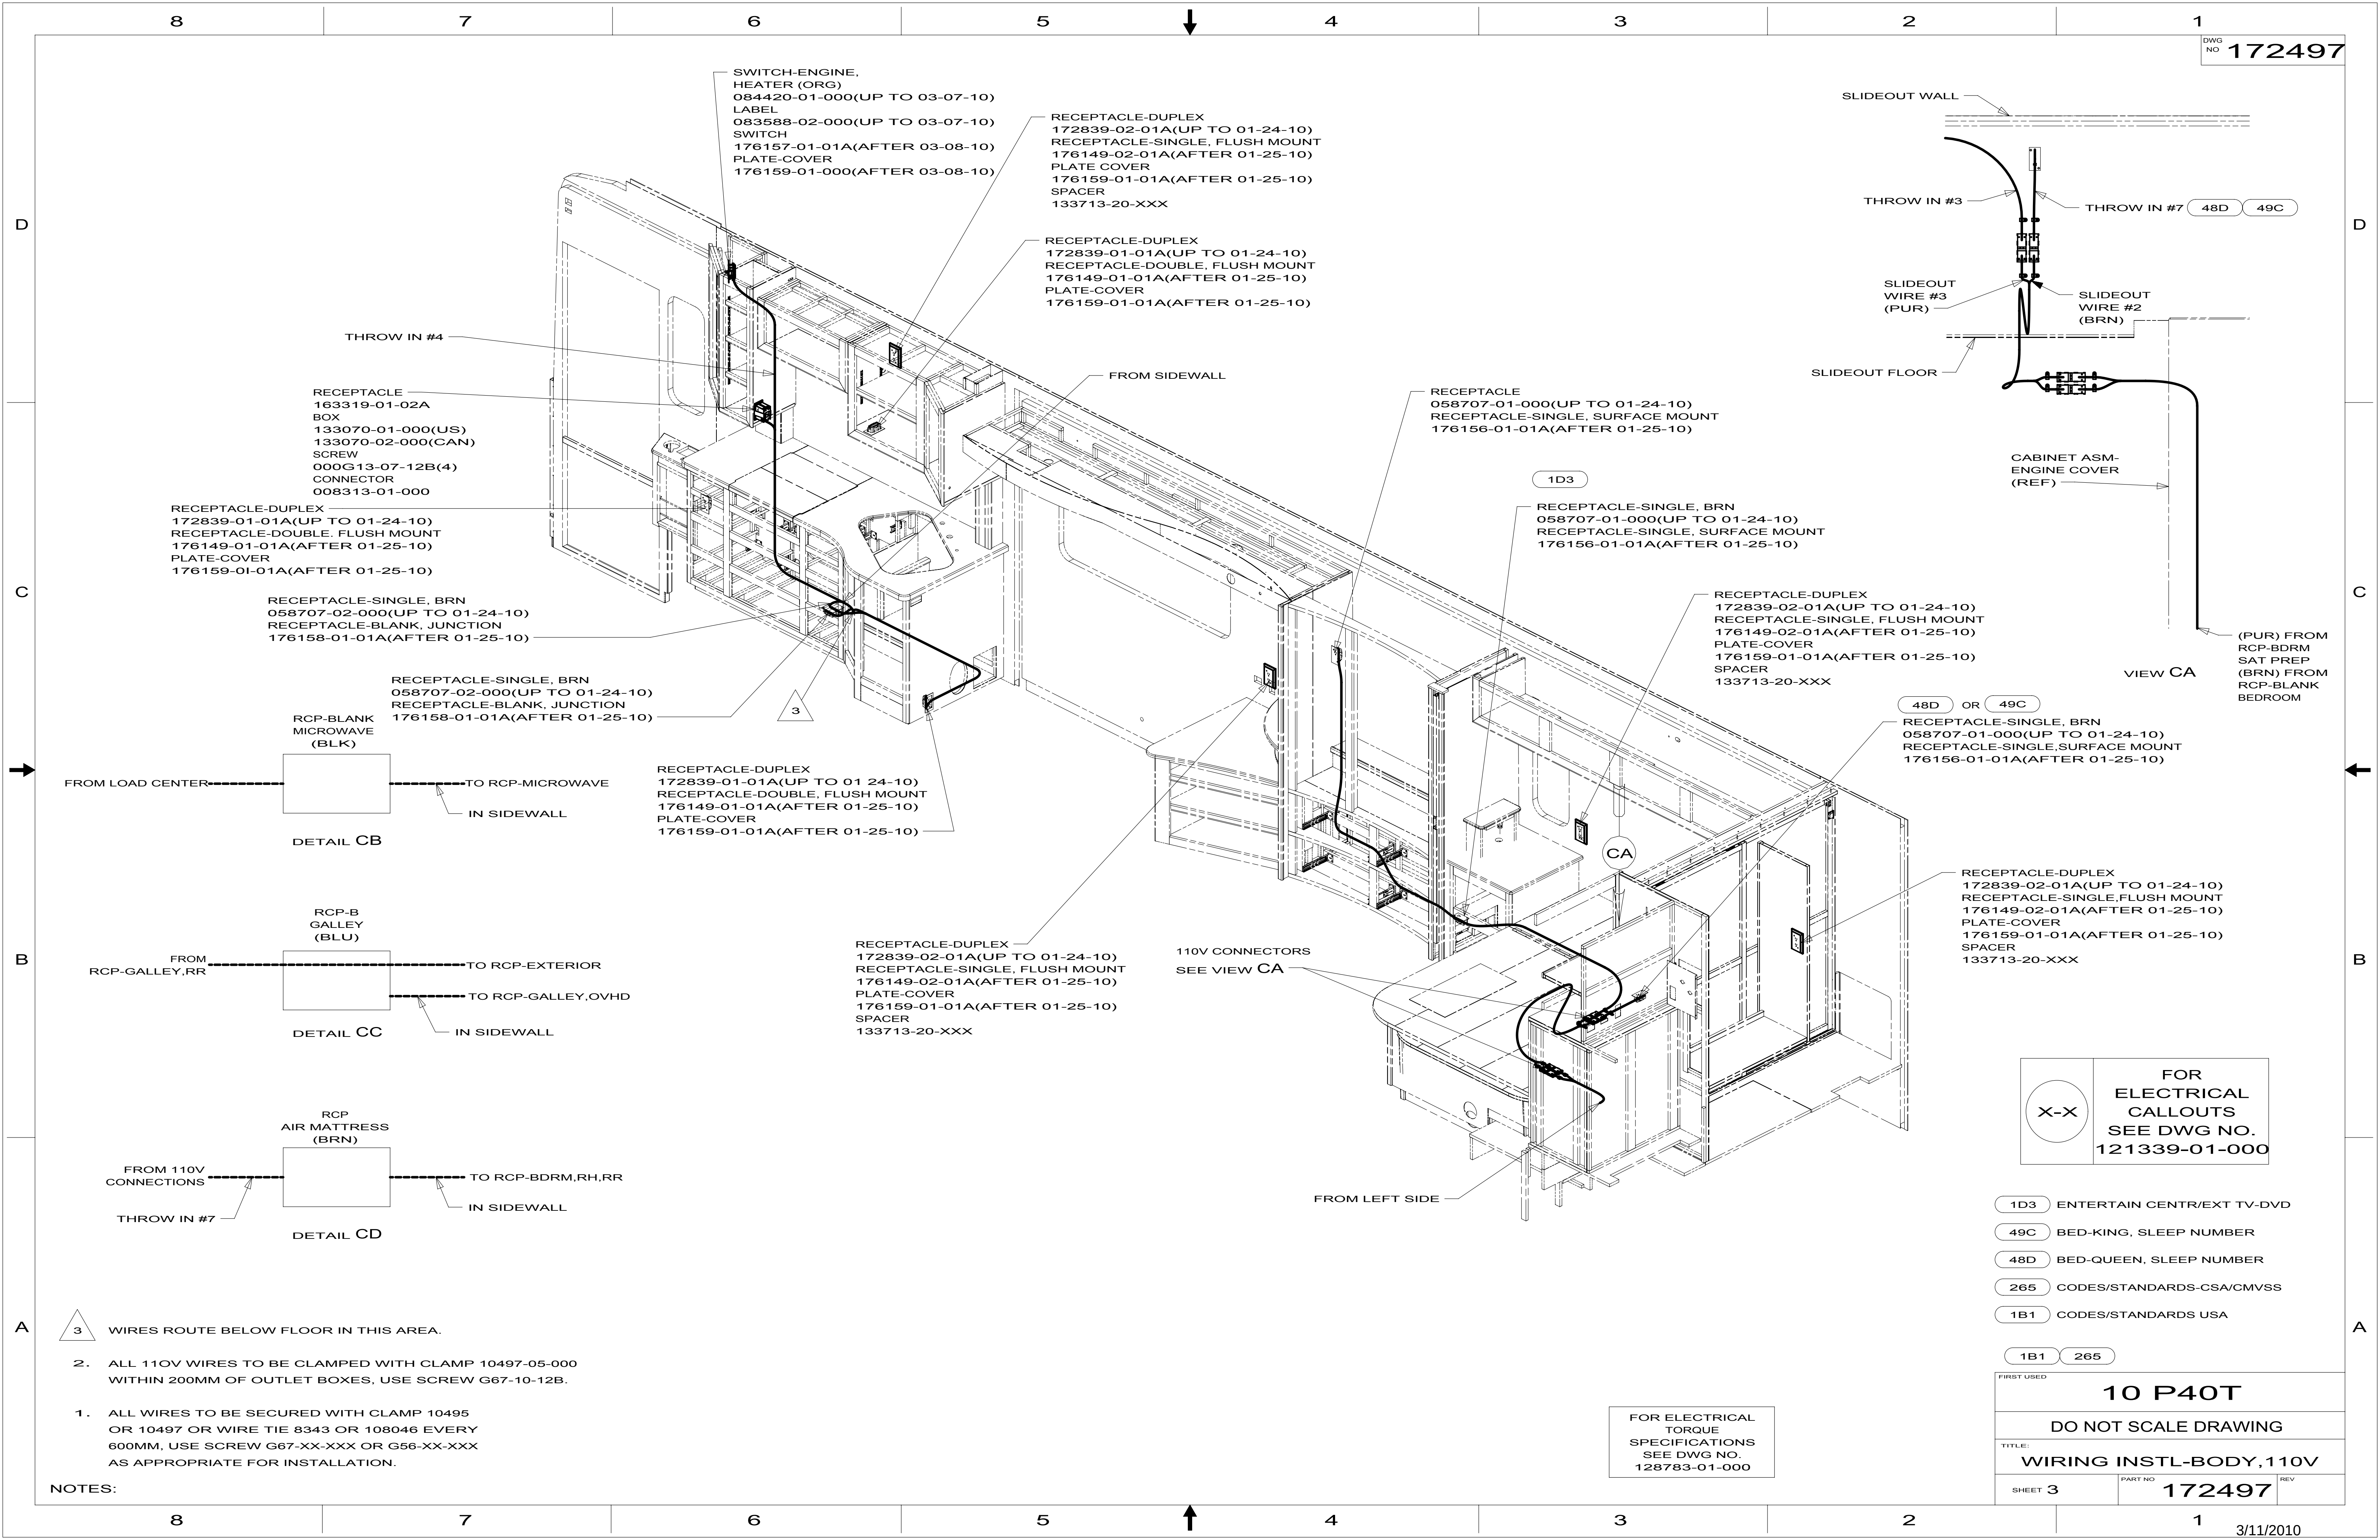FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000




FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	---


- | | |
|-----|----------------------------|
| 1D3 | ENTERTAIN CENTR/EXT TV-DVD |
| 49C | BED-KING, SLEEP NUMBER |
| 48D | BED-QUEEN, SLEEP NUMBER |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |

1B1		265	
FIRST USED			
10 P40T			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-BODY, 110V			
SHEET 3		PART NO 172497	REV

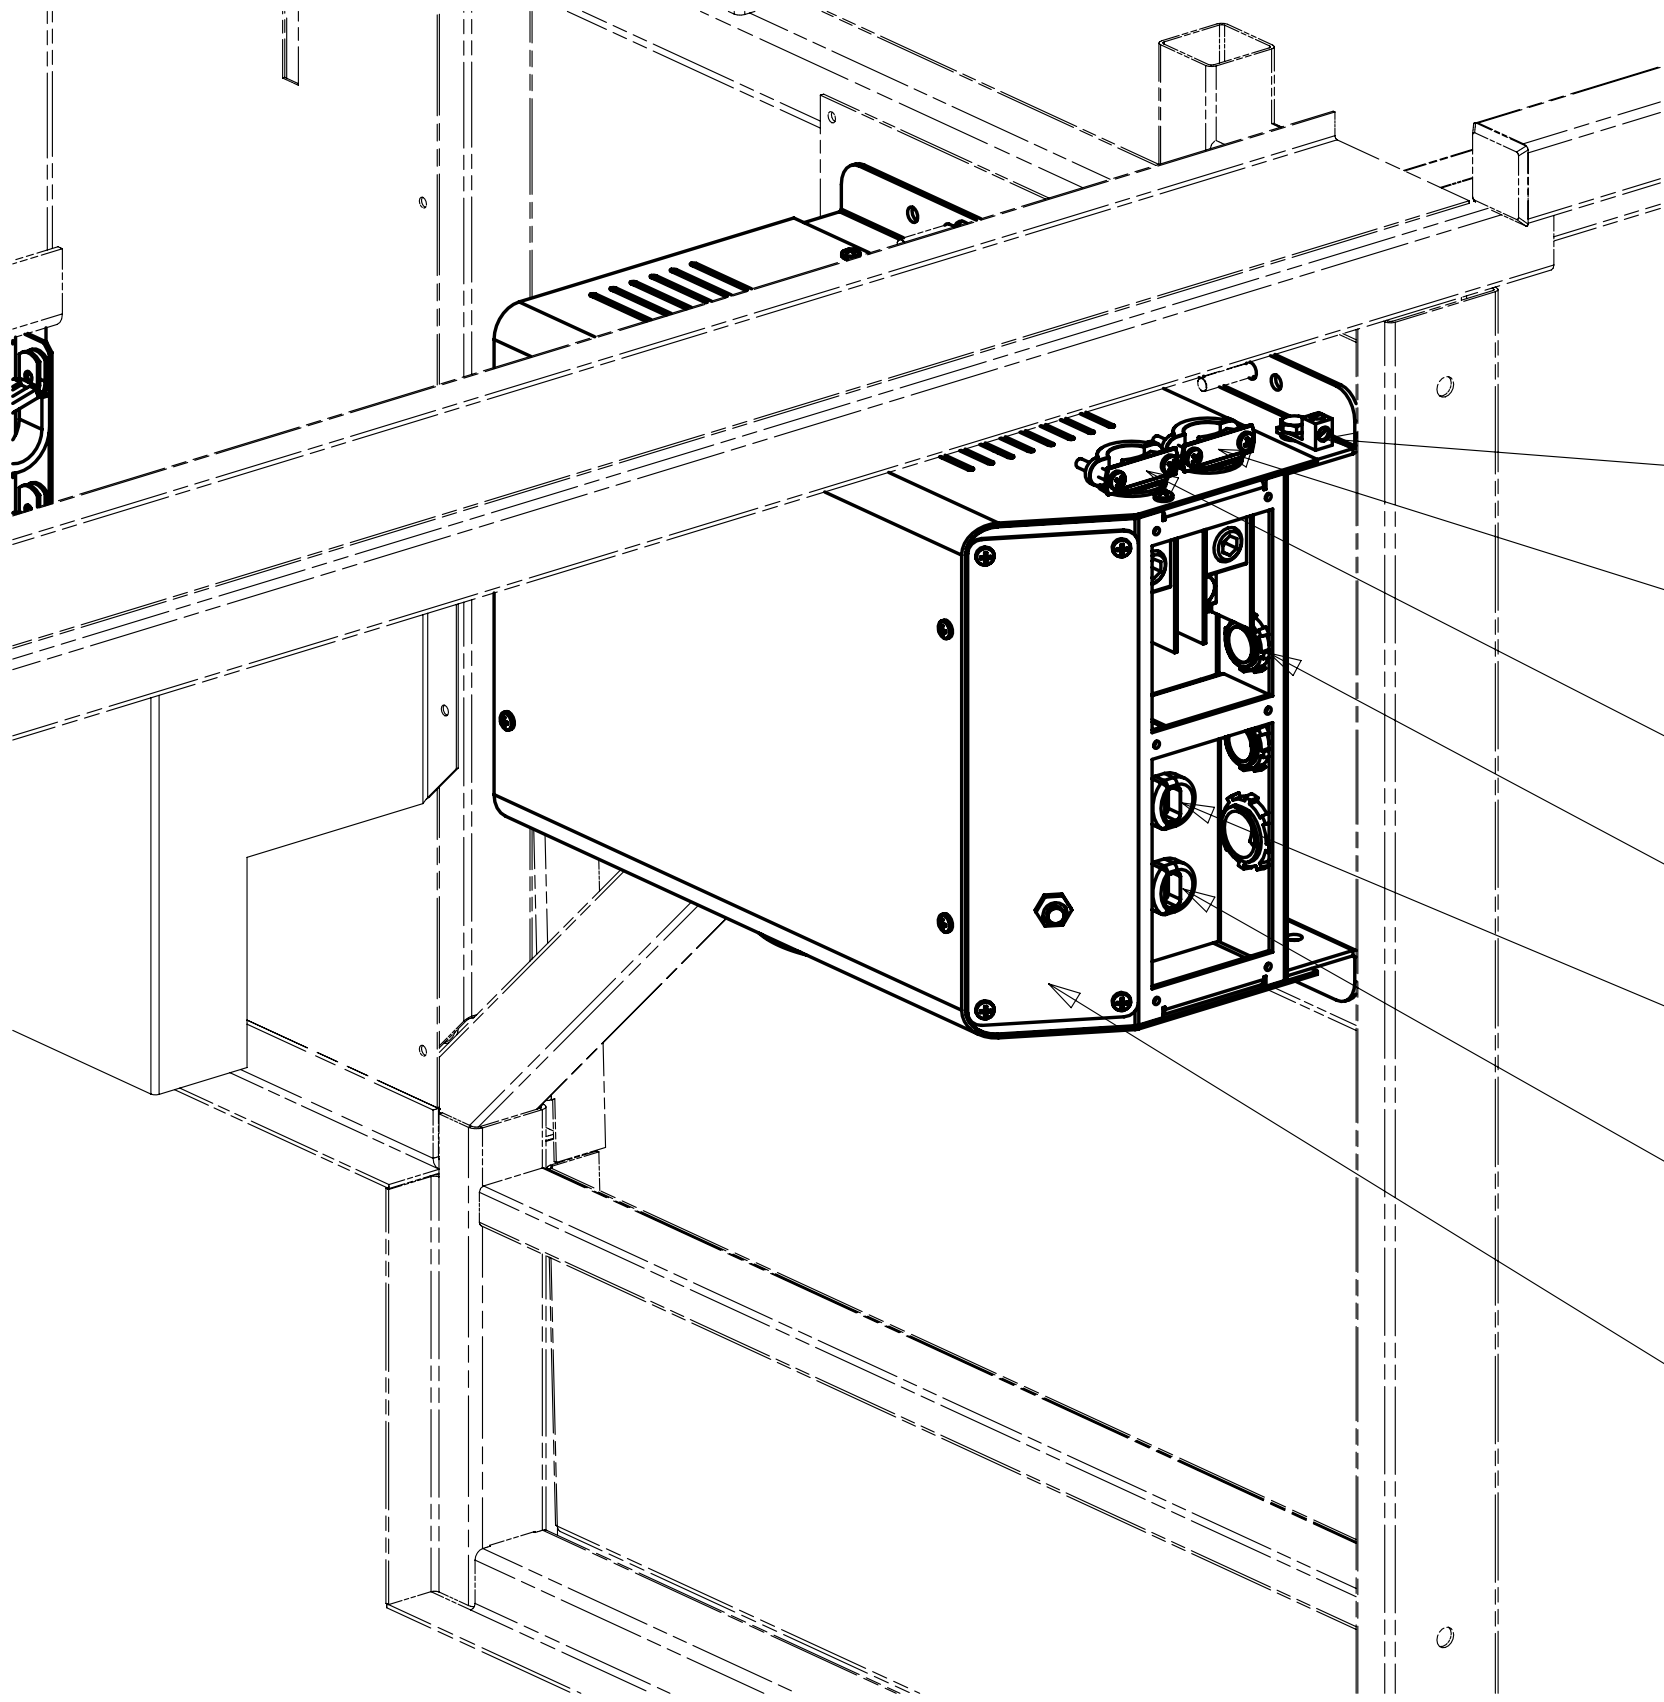

VIEW DA

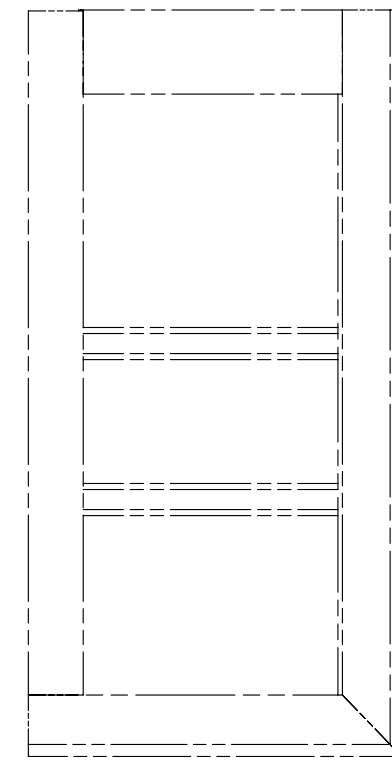
- WIRE ASM-GROUND
136145-01-015
- NEGATIVE BATTERY
CABEL CONNECTION ²
- POSITIVE BATTERY
CABEL CONNECTION ²
- REMOTE DISPLAY PANEL
& AC TEMP SENSOR CONNECTION
- AC INPUT
10 GA WIRE FROM
MAIN BREAKER PANEL
- AC OUTPUT
10 GA WIRE FROM
INVERTER BREAKER PANEL
- INVERTER
172438-01-000
NUT
000D39-04-00B (4)



VIEW DC

- RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE, FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)

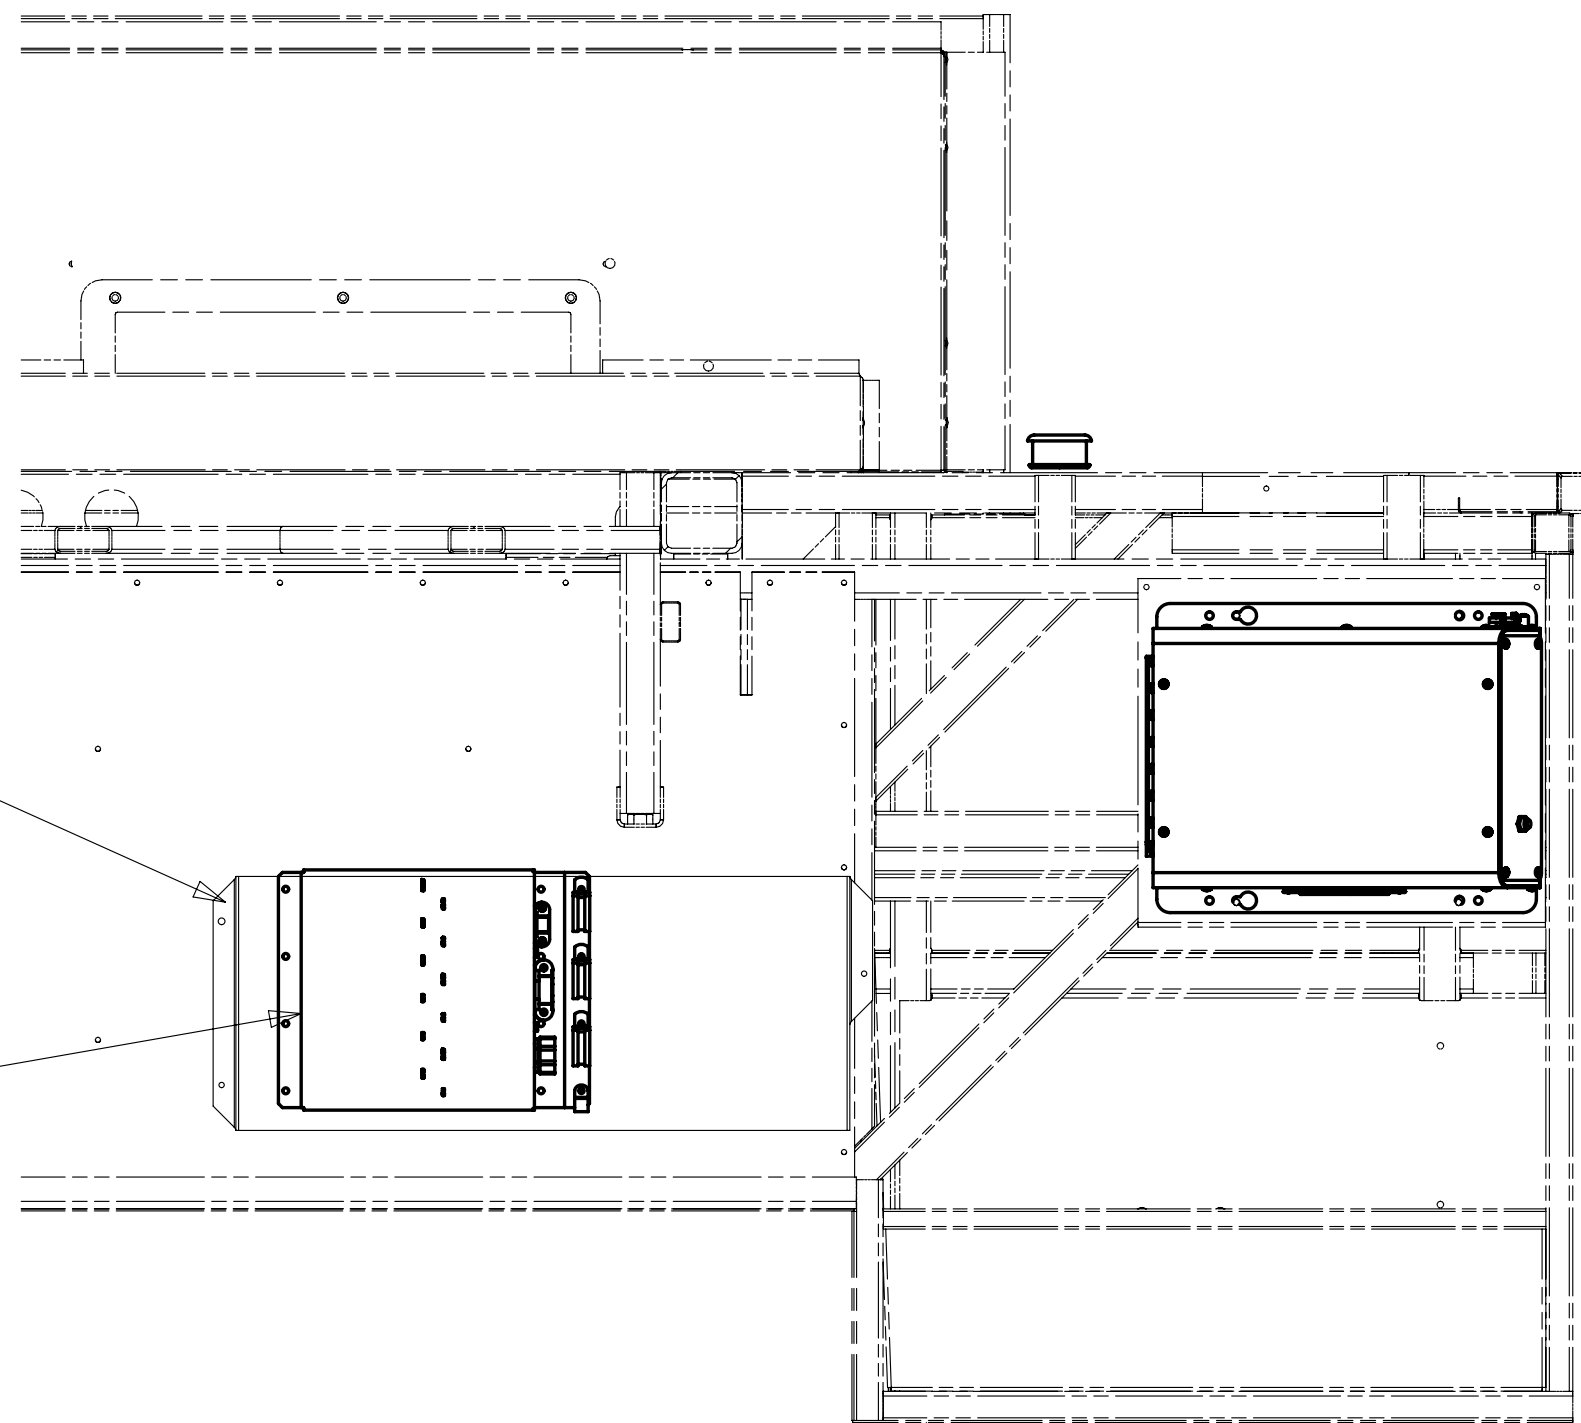- RECEPTACLE-DUPLEX
172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE, FLUSH MOUNT
176149-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)



VIEW DB

- BRACKET-WIRE COVER
164338-01-02B
SCREW
000G39-10-12U(5)

- ¹ ATS

- ² SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- ¹ SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL
X-X
CALLOUTS
SEE DWG NO.
121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

- 1B1 265

FIRST USED		
10 P40T		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 4	PART NO. 172497	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

D

C

B

A

D

C

B

A

		P34Y	P39N	P40L	P40T
RED	12-UL	136135-07-050	136135-07-058	136135-07-050	136135-07-085
	12-CA	136136-07-050	136136-07-058	136136-07-050	136136-07-085
MAIN	4-3 UL	136141-01-033	136141-01-033	136141-01-032	136141-01-060
	4-3 CA	136142-01-033	136142-01-033	136142-01-032	136142-01-060
GRN	12-UL	136135-08-050	136135-08-058	136135-08-050	136135-08-085
	12-CA	136136-08-050	136136-08-058	136136-08-050	136136-08-085
YEL	14-UL	136131-05-035	136131-05-065	136131-05-020	136131-05-020
	14-CA	136134-05-035	136134-05-065	136134-05-020	136134-05-020
YEL-2	14-UL	136131-13-126	136131-13-150	136131-13-0451	136131-13-1101
	14-CA	136134-13-126	136134-13-150	136134-13-0451	136134-13-1101
GLD	12-UL	136135-10-078	136135-10-078	136135-10-050	136135-10-075
	12-CA	136136-10-078	136136-10-078	136136-10-050	136136-10-075
WHT	12 UL	136135-09-063	136135-09-063	136135-09-080	136135-09-095
	12 CA	136136-09-063	136136-09-063	136136-09-080	136136-09-095
BLU	14-UL	136131-02-095	136131-02-215	136131-02-0961	136131-02-200
	14-CA	136134-02-095	136134-02-215	136134-02-0961	136134-02-200
BRN	14-UL	136131-03-0681	136131-03-1301	136131-03-0801	136131-03-2601
	14-CA	136134-03-0681	136134-03-1301	136134-03-0801	136134-03-2601
PUR	14-UL	136131-04-045	136131-04-075	136131-04-092	136131-04-1351
	14-CA	136134-04-045	136134-04-075	136134-04-092	136134-04-1351
BLK	14-UL	136131-06-0681	136131-06-100	136131-06-0401	136131-06-120
	14-CA	136134-06-0681	136134-06-100	136134-06-0401	136134-06-120
INVERTER CHARGER MAIN	10-UL	-----	-----	136137-01-040	136137-01-075
	10-CA	-----	-----	136138-01-040	136138-01-075
INVERTER CHARGER SUB MAIN	10-UL	-----	-----	136137-01-040	136137-01-075
	10-CA	-----	-----	136138-01-040	136138-01-075
ORG	14-UL	-----	-----	136131-16-165	136131-16-300
	14-CA	-----	-----	136134-16-165	136134-16-300
GRY	14-UL	-----	-----	136131-15-055	-----
	14-CA	-----	-----	136134-15-055	-----

14C

14C

1 SEE DETAIL BA FOR CONNECTOR INSTALLATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 14C FIREPLACE-ELECTRIC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

WINNEBAGO

INDUSTRIES

COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFT-ORIG

ORIG. DATE

CHGR

ALL DIMENSIONS ARE
IN MILLIMETERS

P.E.

M.E.

FIRST USED

DSNR

10 P-SERIES

UNSPECIFIED TOLERANCES ARE:

MATERIAL:

WHOLE DIM (X) : 3

ONE-PLACE (X.X) : 1.5

TWO-PLACE (X.XX) : 0.50

ANGLE : 1°

THIRD ANGLE
PROJECTION

DO NOT SCALE DRAWING

TITLE:
LOAD CENTER/ATS ASM

SHEET 1 OF 5

PART NO 171529

REV

REF:

1

2/26/2010



8

7

6

5

4

3

2

1

GROUND MAIN

ATS GROUND

GENERATOR CABLE ASM

CONDUIT ASM-CENTRAL A/C

THROW IN WIRE #1

THROW IN WIRE #2

THROW IN WIRE #3

THROW IN WIRE #4

THROW IN WIRE #5

THROW IN WIRE #6

THROW IN WIRE #7

THROW IN WIRE #8

THROW IN WIRE #9

THROW IN WIRE #10

GROUND SUB MAIN

SLIDEOUT WIRE #1

SLIDEOUT WIRE #2

SLIDEOUT WIRE #3

SLIDEOUT WIRE #4

SLIDEOUT WIRE #5

SLIDEOUT WIRE #6

P34Y

P39N

P40L

P40T

136145-01-025

136145-01-020

136145-01-026

136145-01-072

136145-01-030

136145-01-025

136145-01-010

136145-01-020

136148-02-108

136148-02-125

136148-02-112

136148-02-085

151704-01-030

151704-01-030

151704-01-026

151704-01-028

136131-13-020

136131-13-009

136131-13-045

136131-13-012

136134-13-020

136134-13-009

136134-13-045

136134-13-012

136131-12-120

136131-12-200

136131-06-040

136134-12-120

136134-12-200

136134-06-040

136131-12-035

136131-03-030

136131-04-120

136131-04-050

136134-12-035

136134-03-030

136134-04-120

136134-04-050

136131-12-060

136131-03-010

136131-03-060

136131-03-060

136134-12-060

136134-03-010

136134-03-060

136134-03-060

136131-12-030

136131-03-055

136131-02-075

136134-12-030

136134-03-055

136134-02-075

136131-12-030

136131-12-030

136131-02-090

136134-12-030

136134-12-030

136134-02-090

136131-03-110

136131-12-020

136131-03-005

136131-03-005

136134-03-110

136134-12-020

136134-03-005

136134-03-005

136131-13-065

136131-13-100

136131-04-032

136134-13-065

136134-13-100

136134-04-032

136131-02-006

136131-04-035

136134-02-006

136134-04-035

136131-02-055

136131-02-018

136134-02-055

136134-02-018

136145-01-026

136145-01-078

136151-13-038

136151-13-030

136151-05-023

136151-13-030

136151-12-038

136151-12-030

136151-06-023

136151-03-023

136151-03-038

136151-03-030

136151-02-023

136151-04-023

136151-06-038

136151-03-020

136151-03-030

136151-03-030

136151-02-020

136151-03-030

136151-03-020

136151-02-030

136151-04-023

171529

DETAIL BA

DETAIL BB

DETAIL BC

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

10 P-SERIES



DO NOT SCALE DRAWING

LOAD CENTER/ATS ASM


SHEET 2

171529

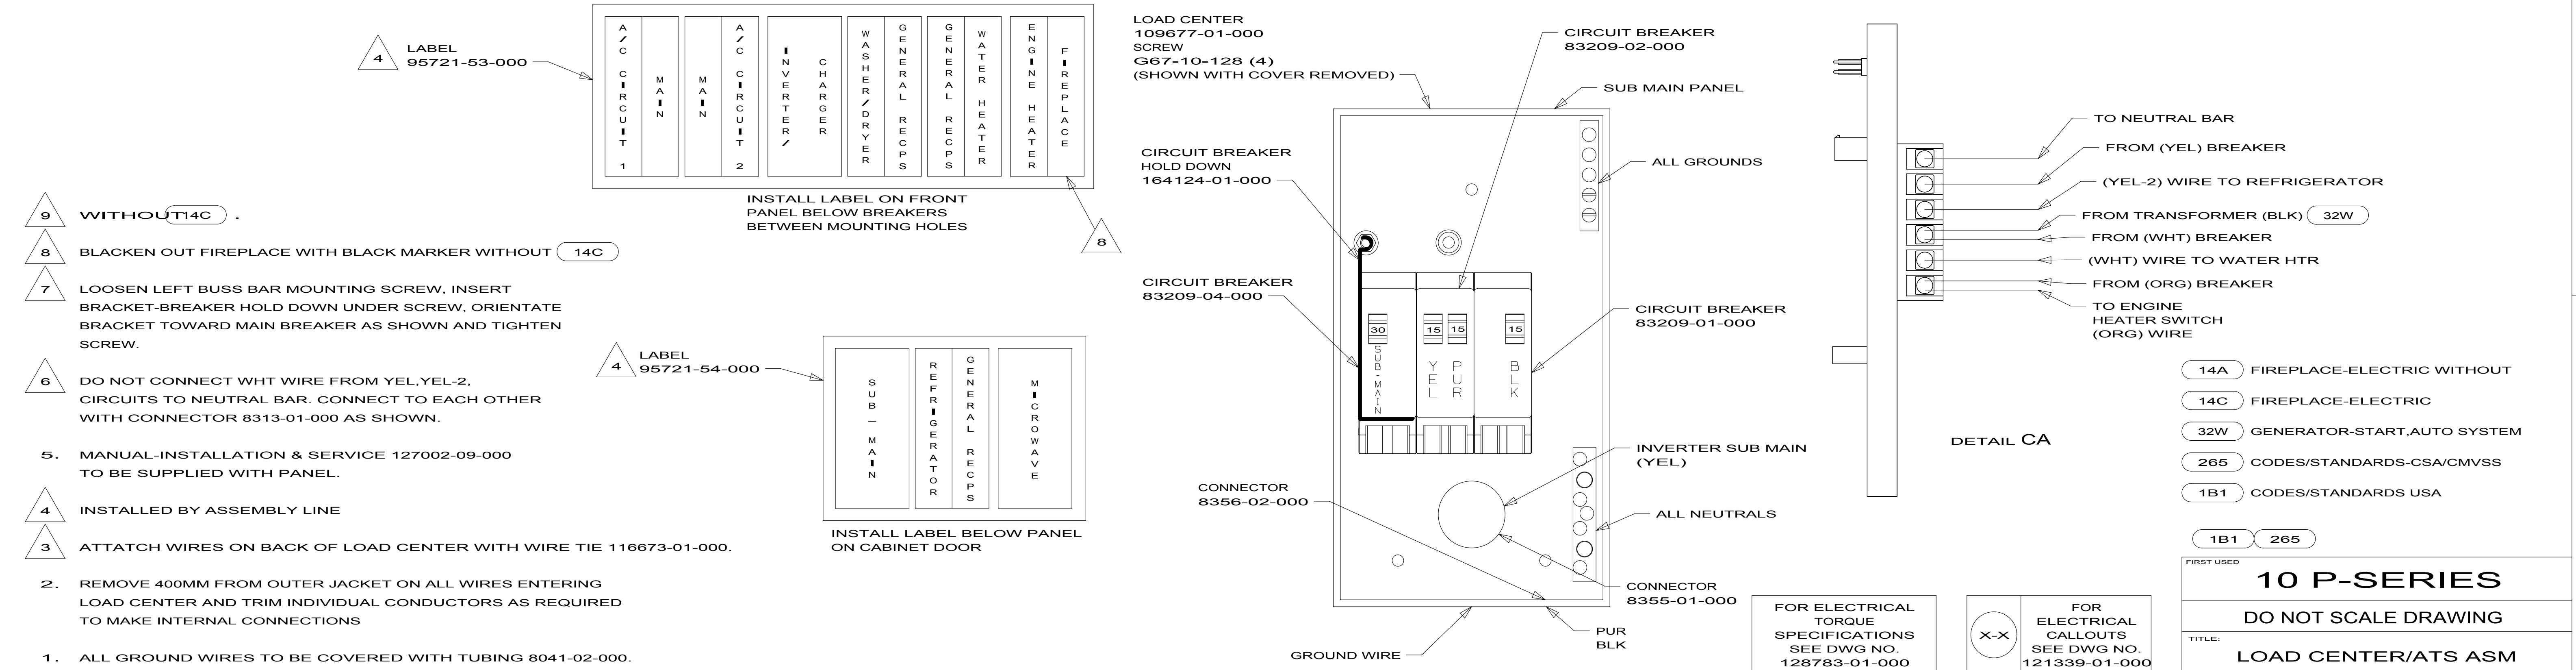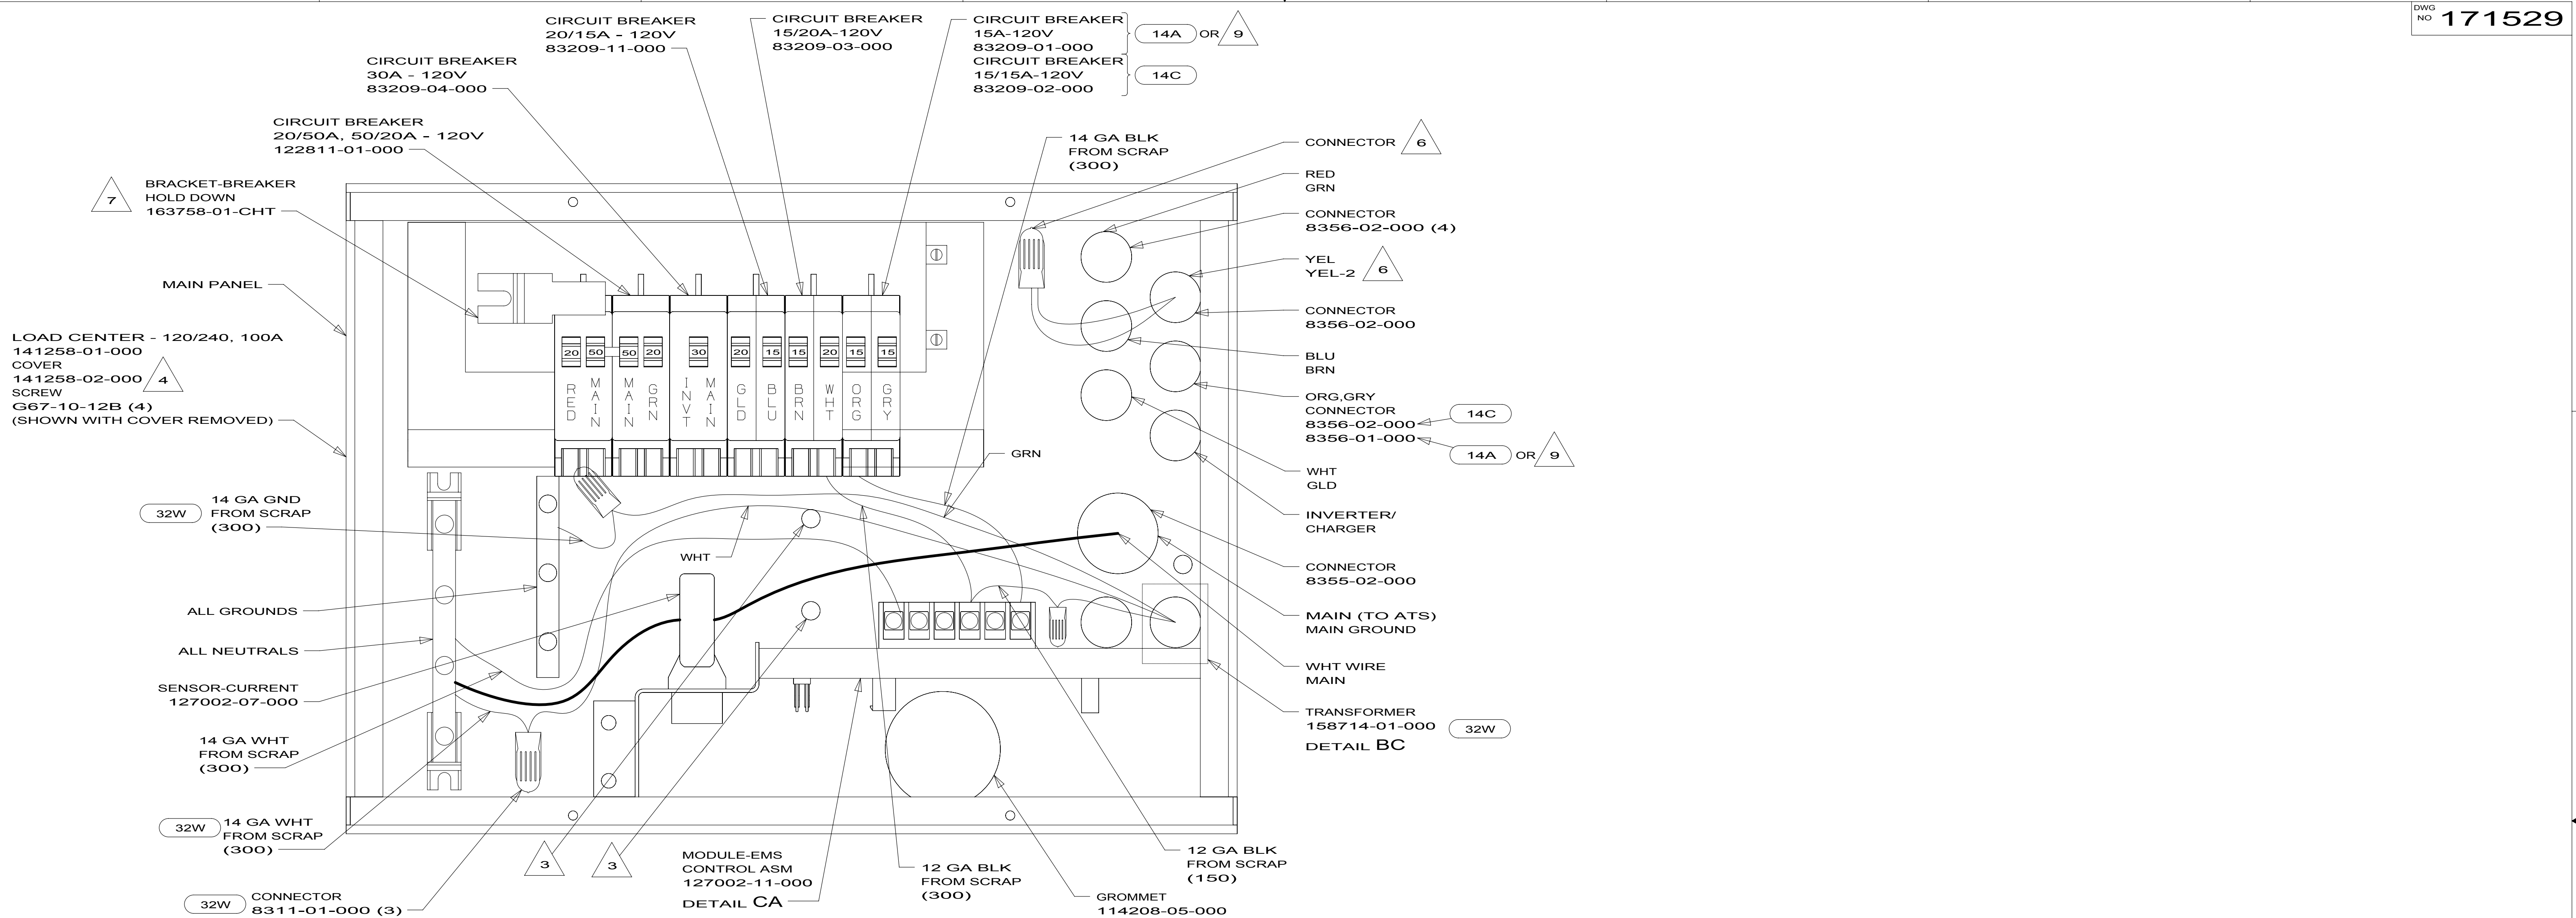2/26/2010



- | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|-----------|---------|--------|--|
| NOTES: | | | | | | | | | | SHEET 3 | 171529 | |
| 8 | 7 | 6 | 5 | ↑ | 4 | 3 | 2 | 1 | 2/26/2010 | | | |

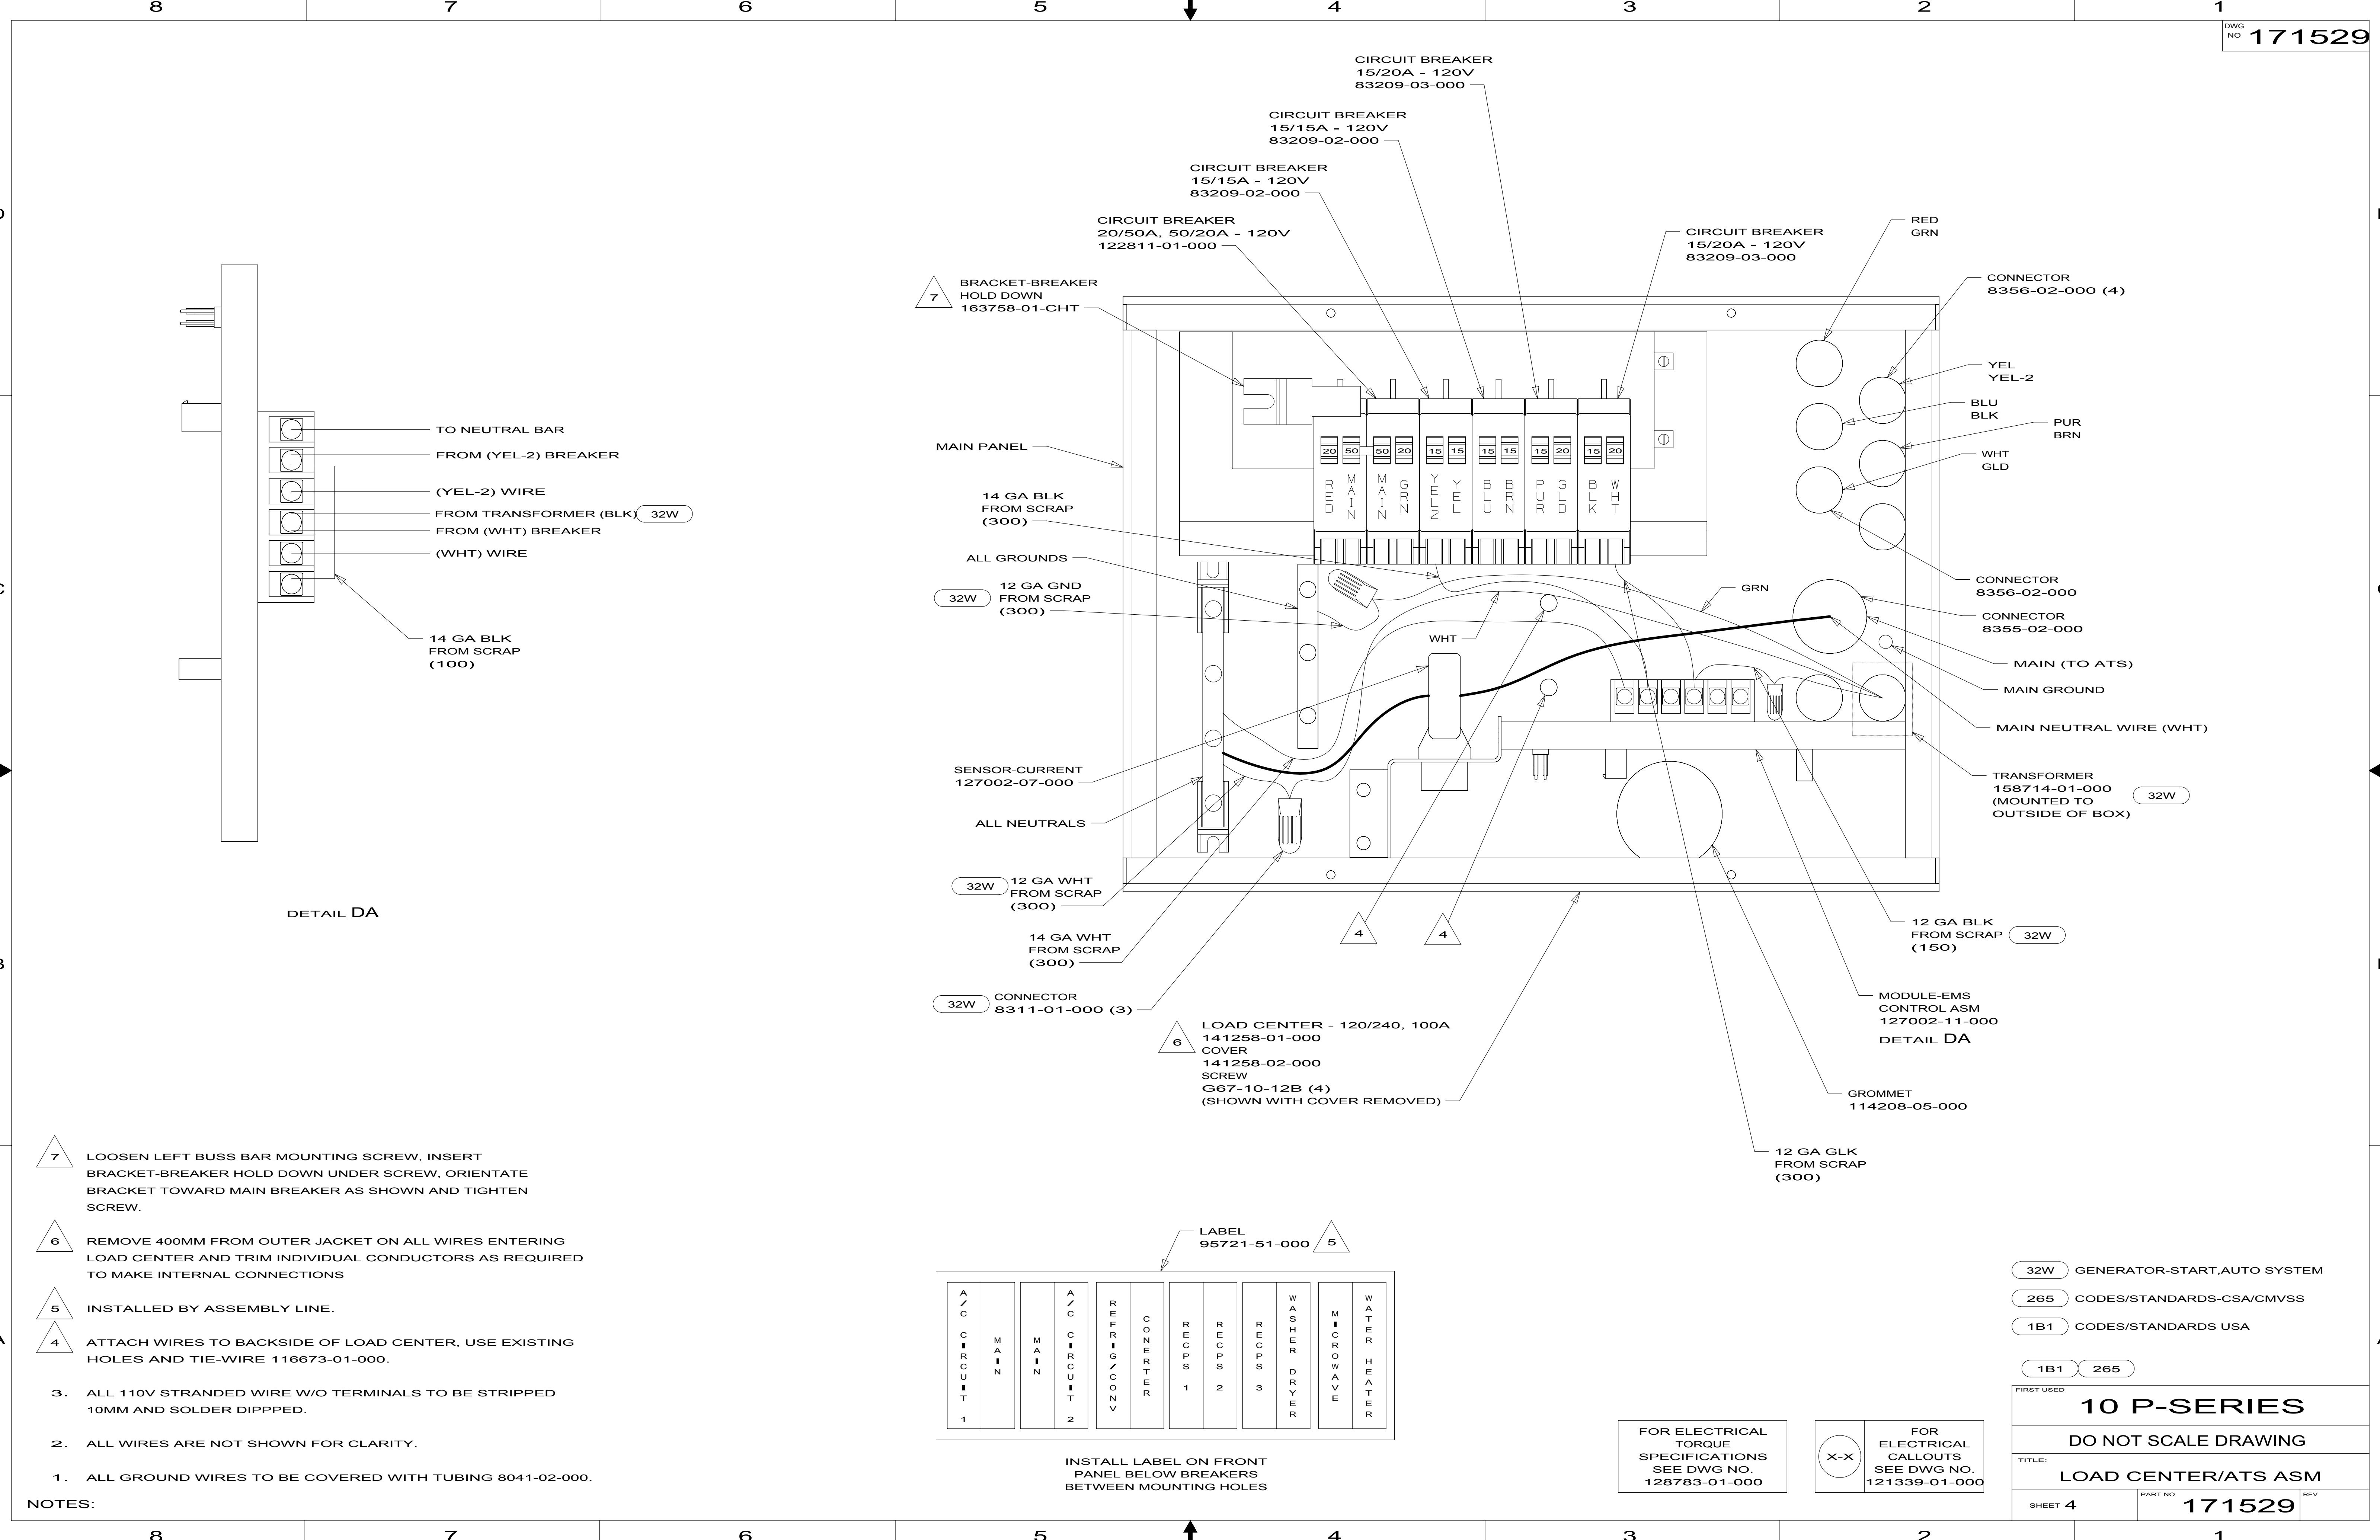

DETAIL DA

DETAIL DA

7. LOOSEN LEFT BUSS BAR MOUNTING SCREW, INSERT BRACKET-BREAKER HOLD DOWN UNDER SCREW, ORIENTATE BRACKET TOWARD MAIN BREAKER AS SHOWN AND TIGHTEN SCREW.
6. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS
5. INSTALLED BY ASSEMBLY LINE.
4. ATTACH WIRES TO BACKSIDE OF LOAD CENTER, USE EXISTING HOLES AND TIE-WIRE 116673-01-000.
3. ALL 110V STRANDED WIRE W/O TERMINALS TO BE STRIPPED 10MM AND SOLDER DIPPED.
2. ALL WIRES ARE NOT SHOWN FOR CLARITY.
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

NOTES:

A / C	M A I N	A / C	R E F R I G / C O N V	R E C P S	R E C P S	R E C P S	W A S H E R D R Y E R	M I C R O W A V E	W A T E R H E A T E R
1		2		1	2	3			

INSTALL LABEL ON FRONT PANEL BELOW BREAKERS BETWEEN MOUNTING HOLES


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 32W GENERATOR-START,AUTO SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: LOAD CENTER/ATS ASM		
SHEET 4	PART NO 171529	REV

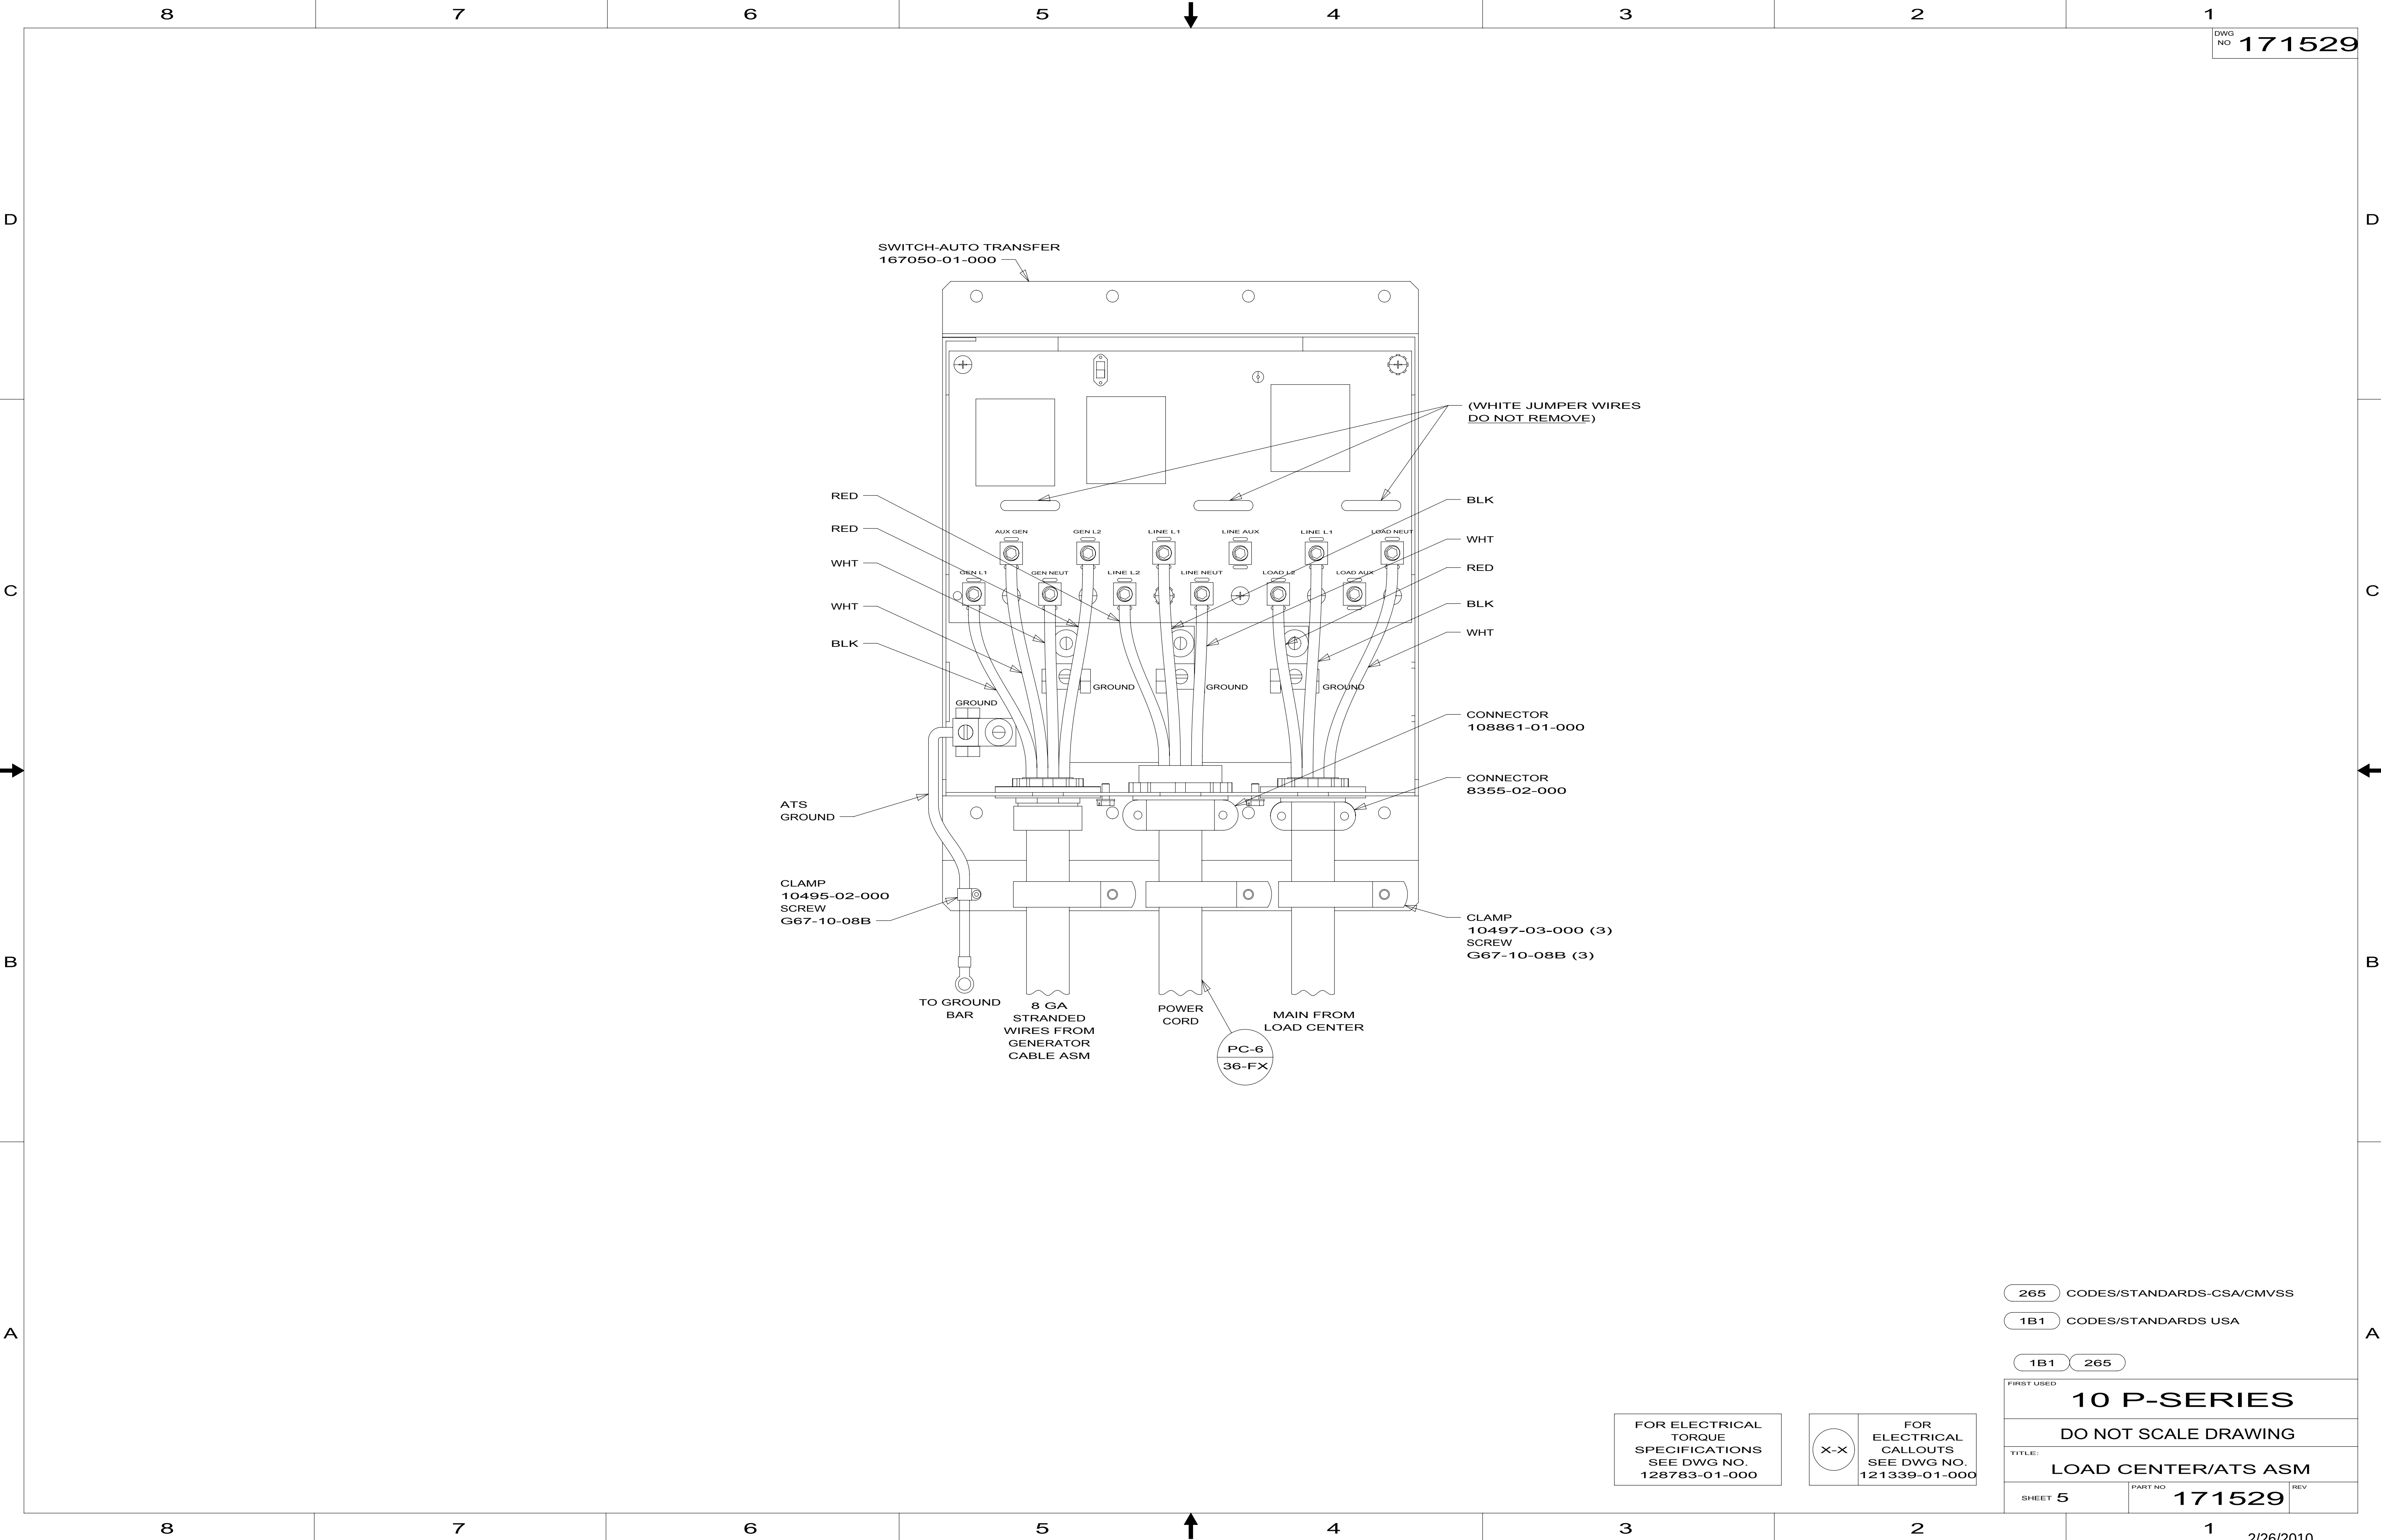

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA


1B1 265


FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
LOAD CENTER/ATS ASM		
SHEET 5	PART NO 171529	REV


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

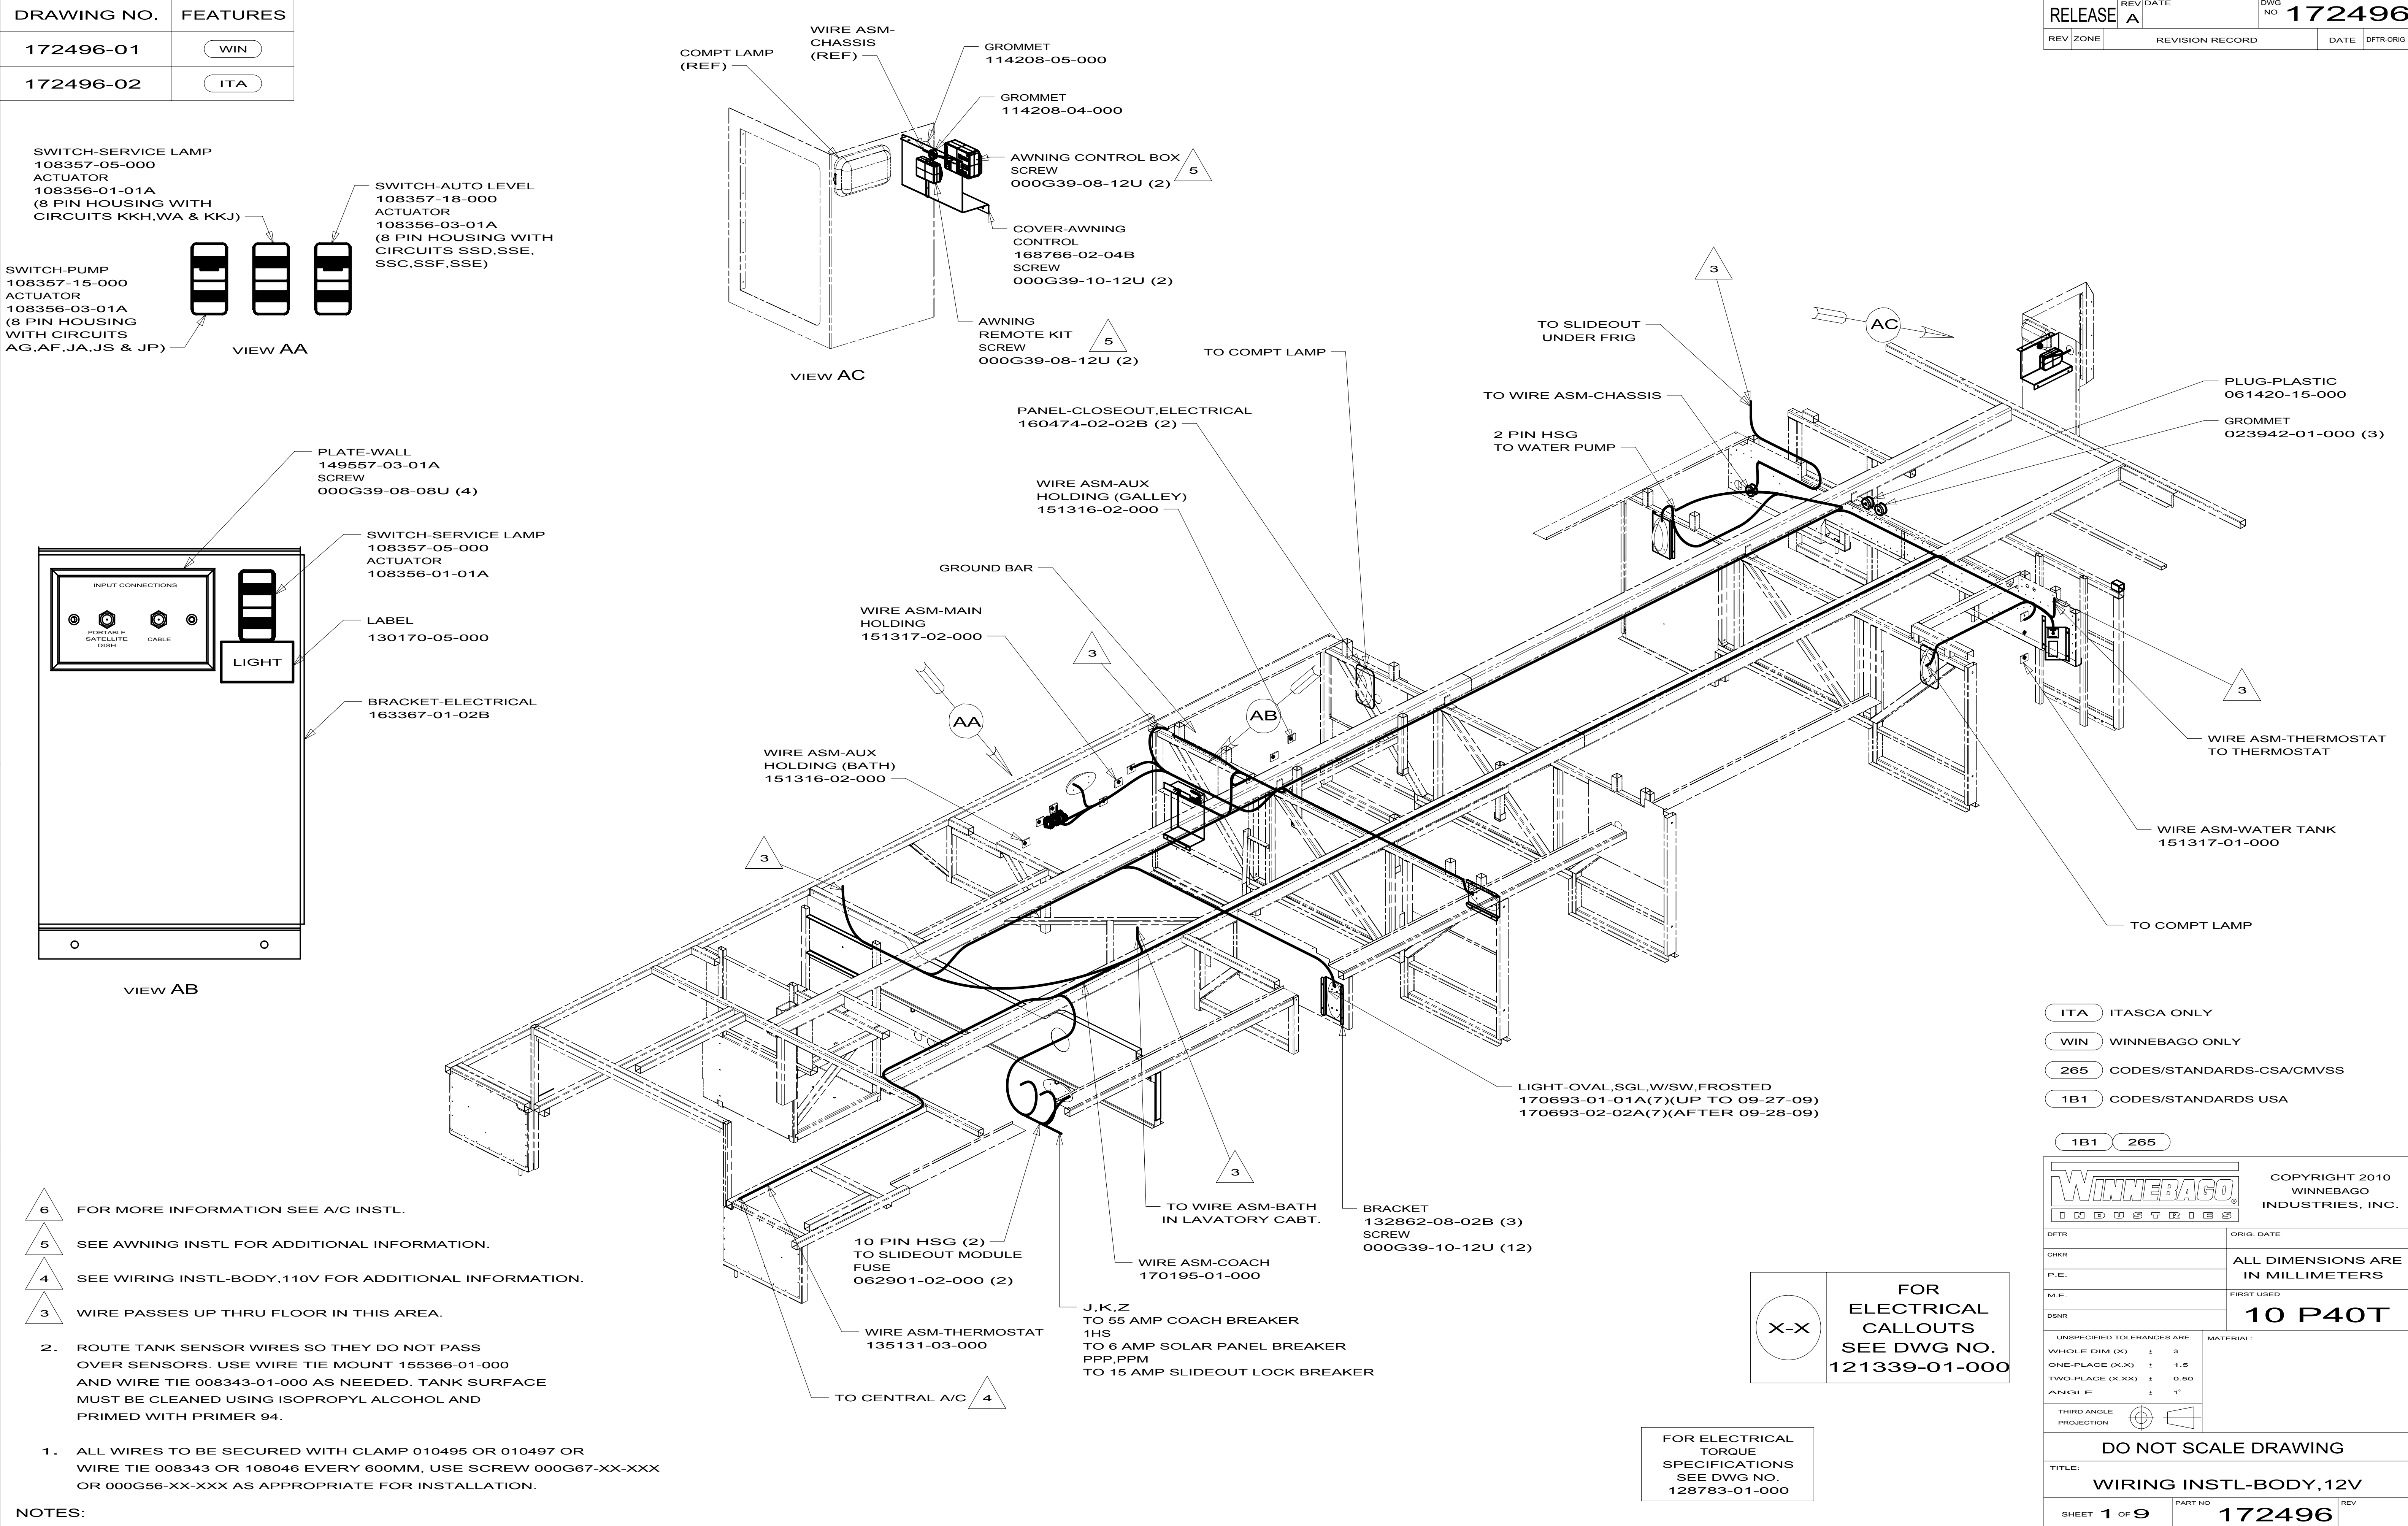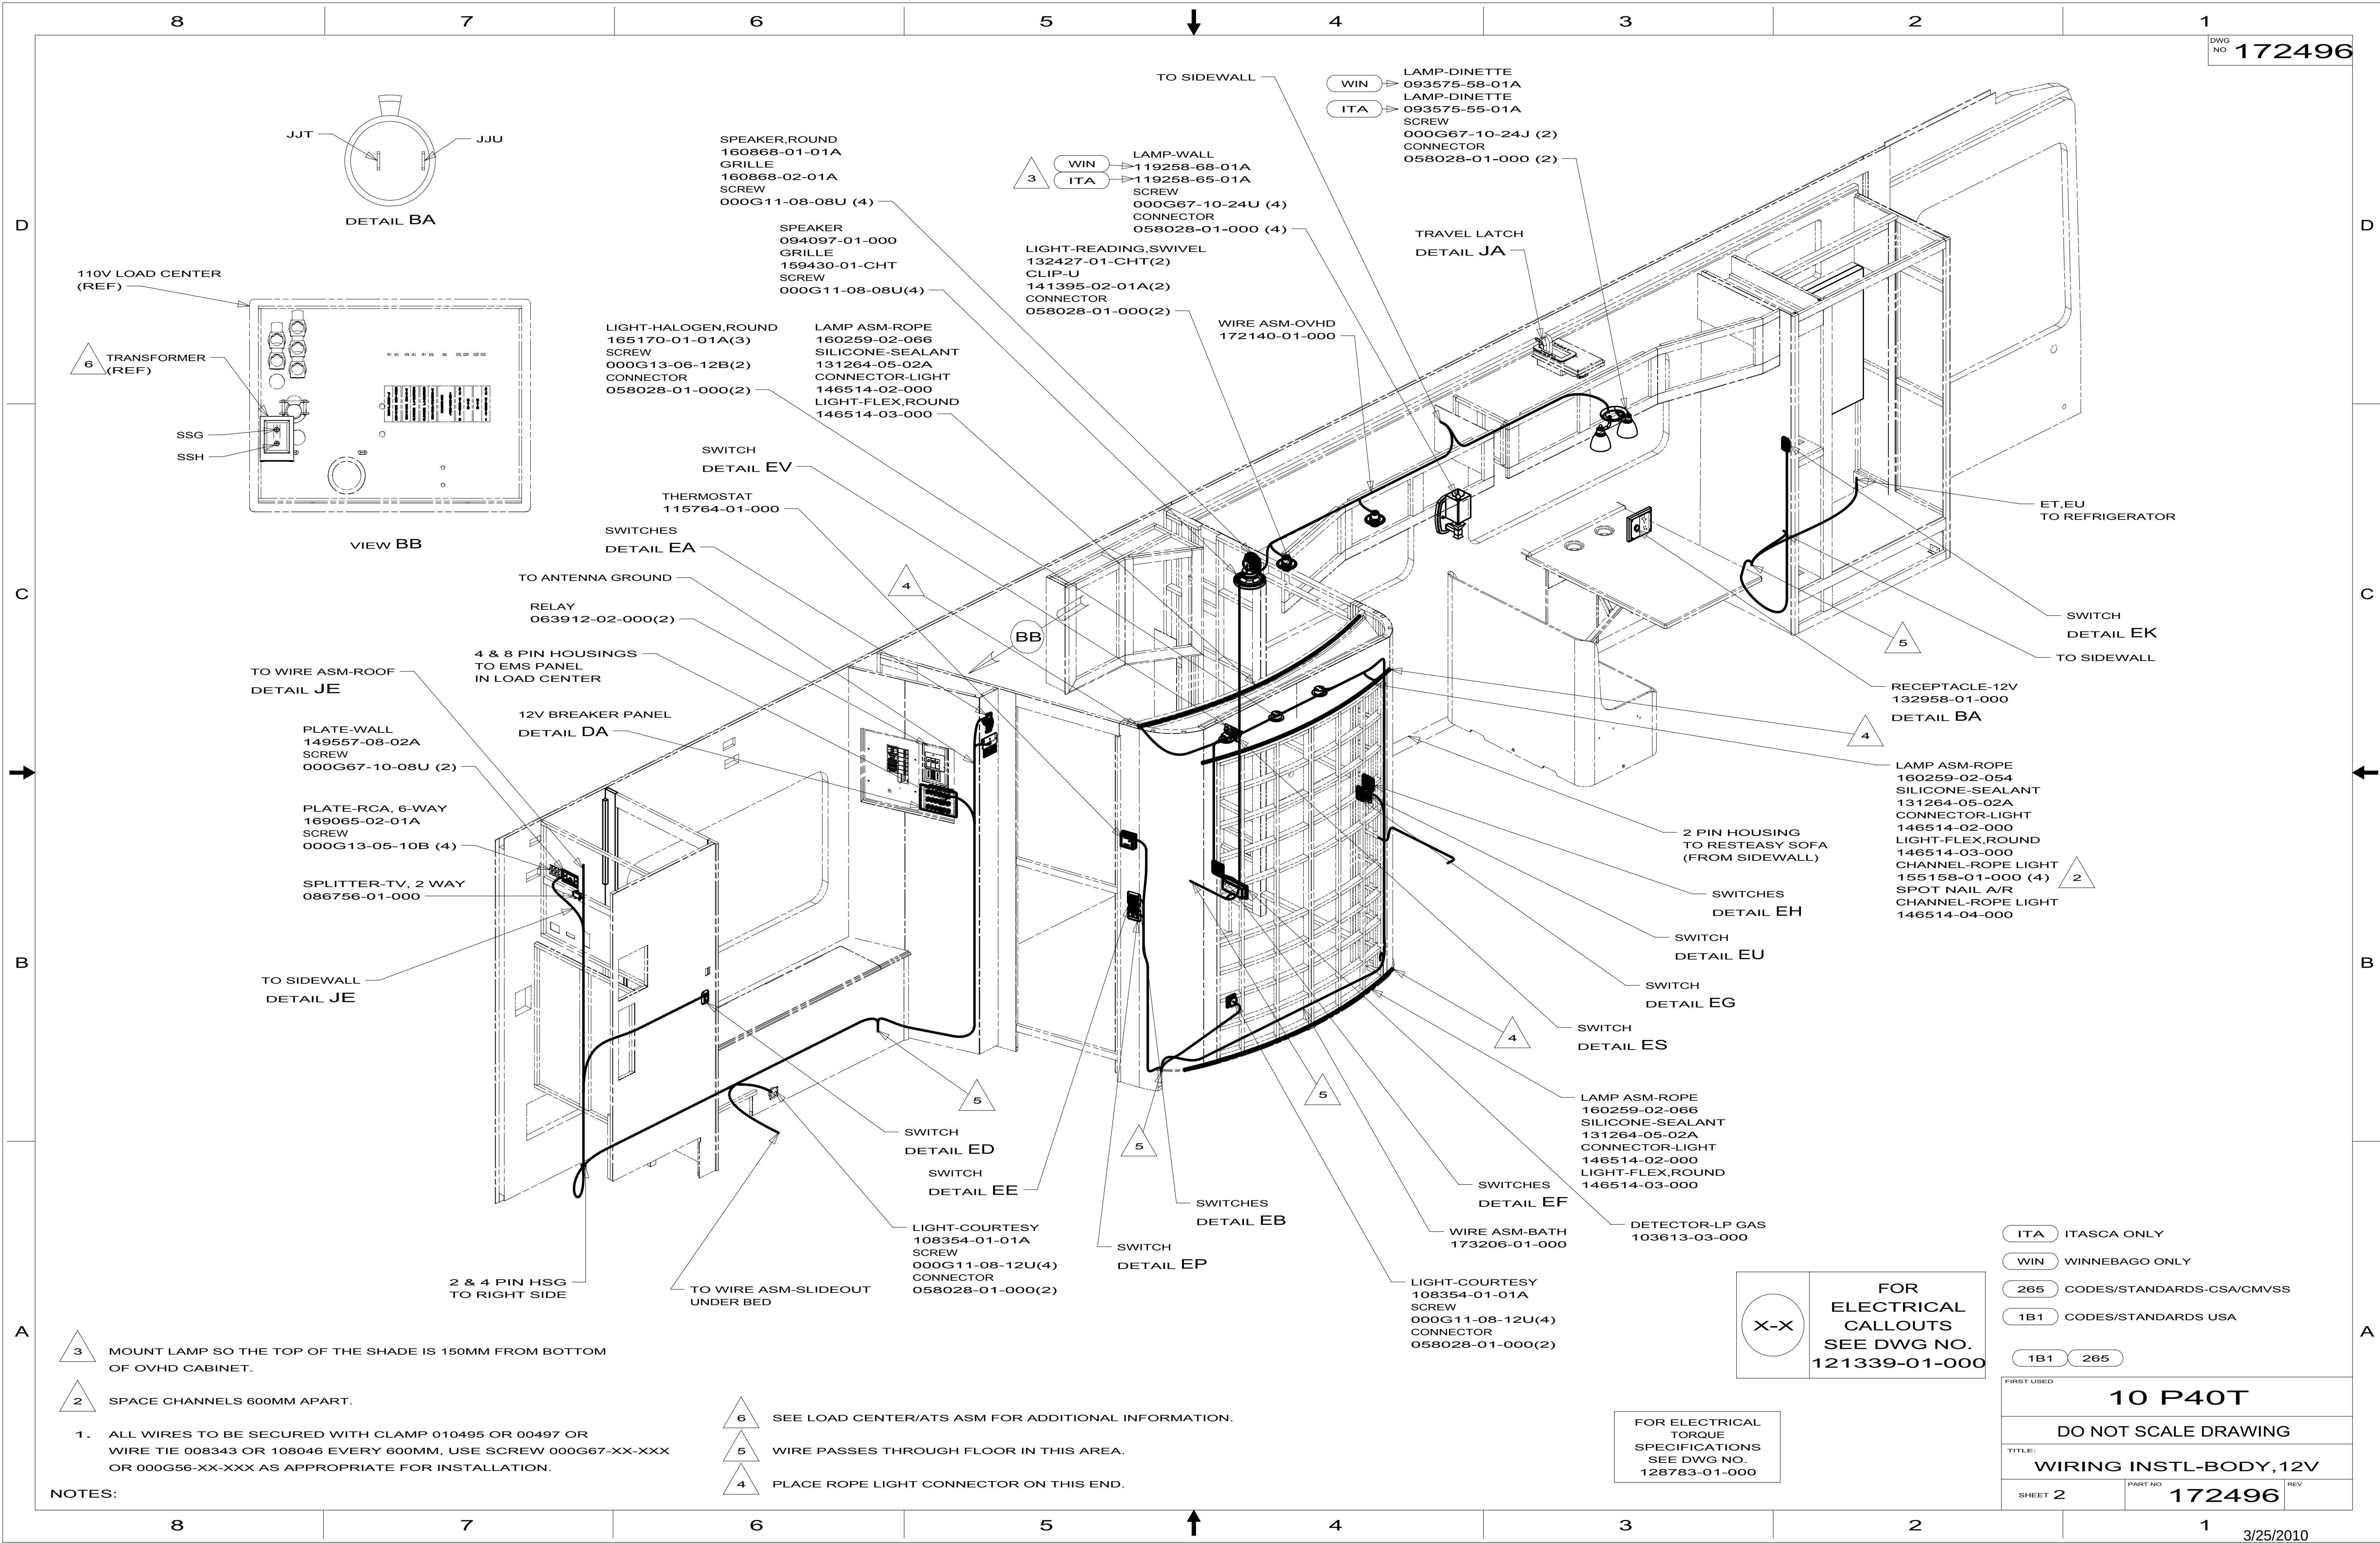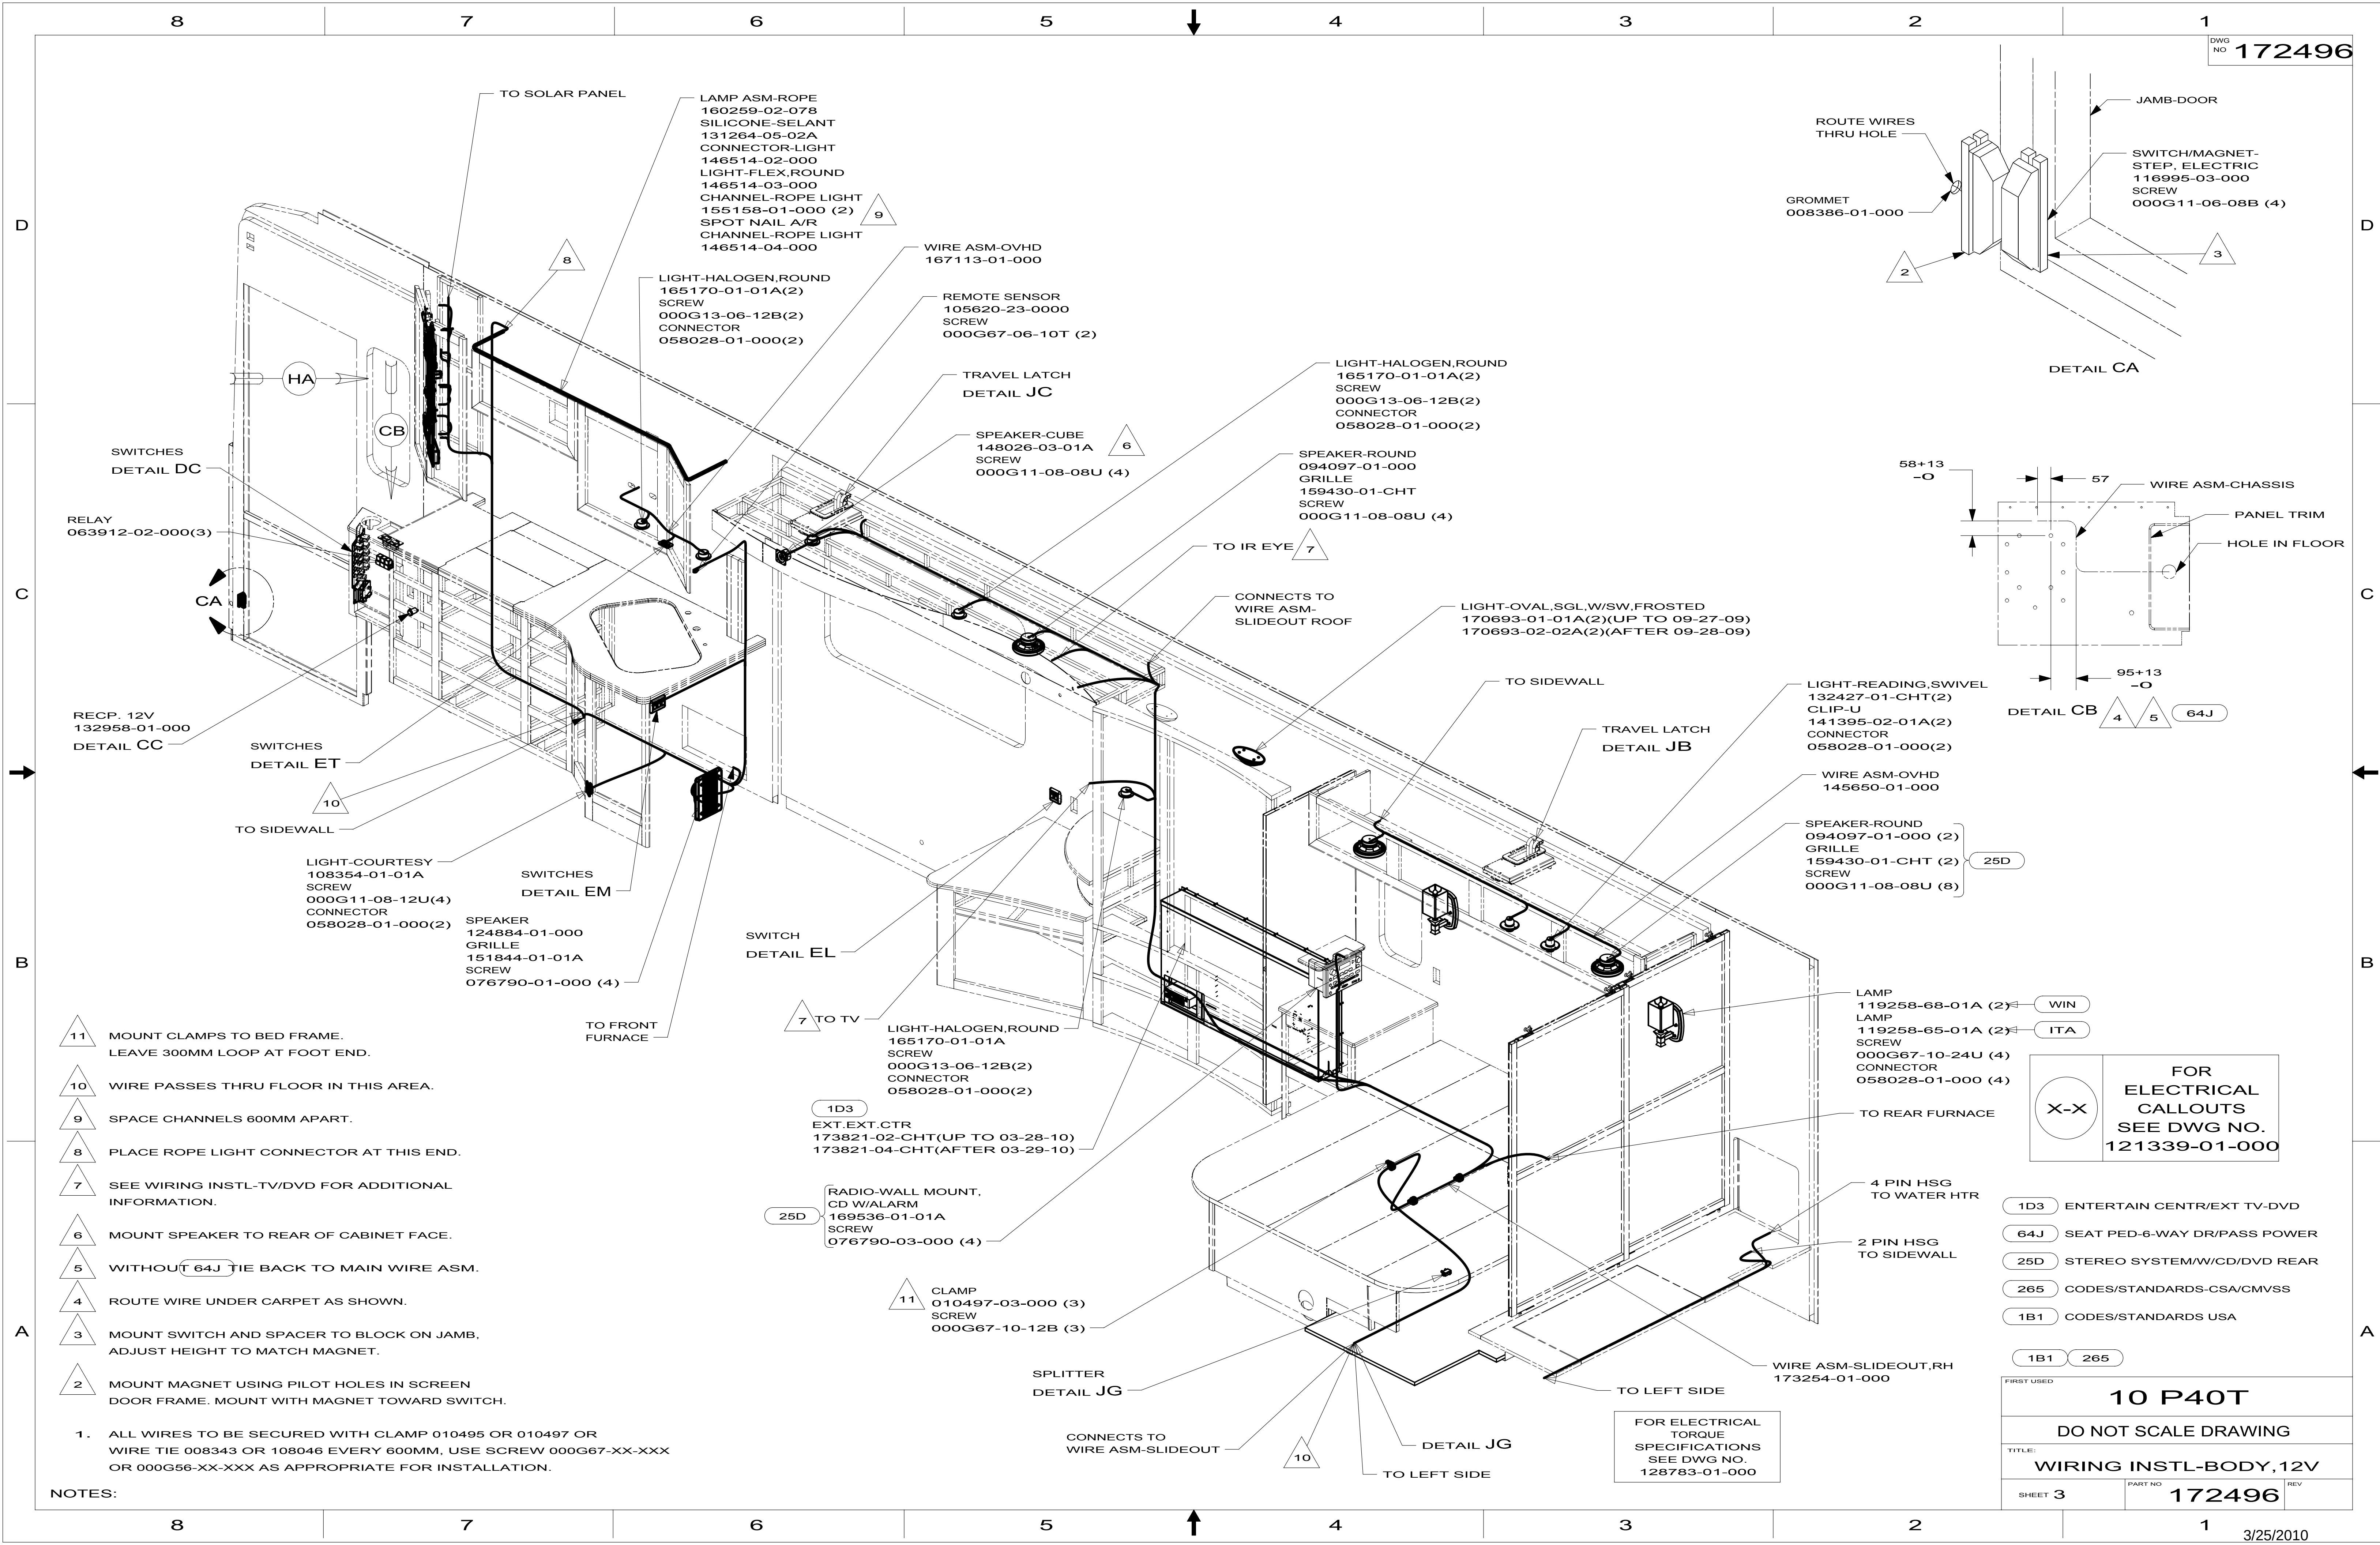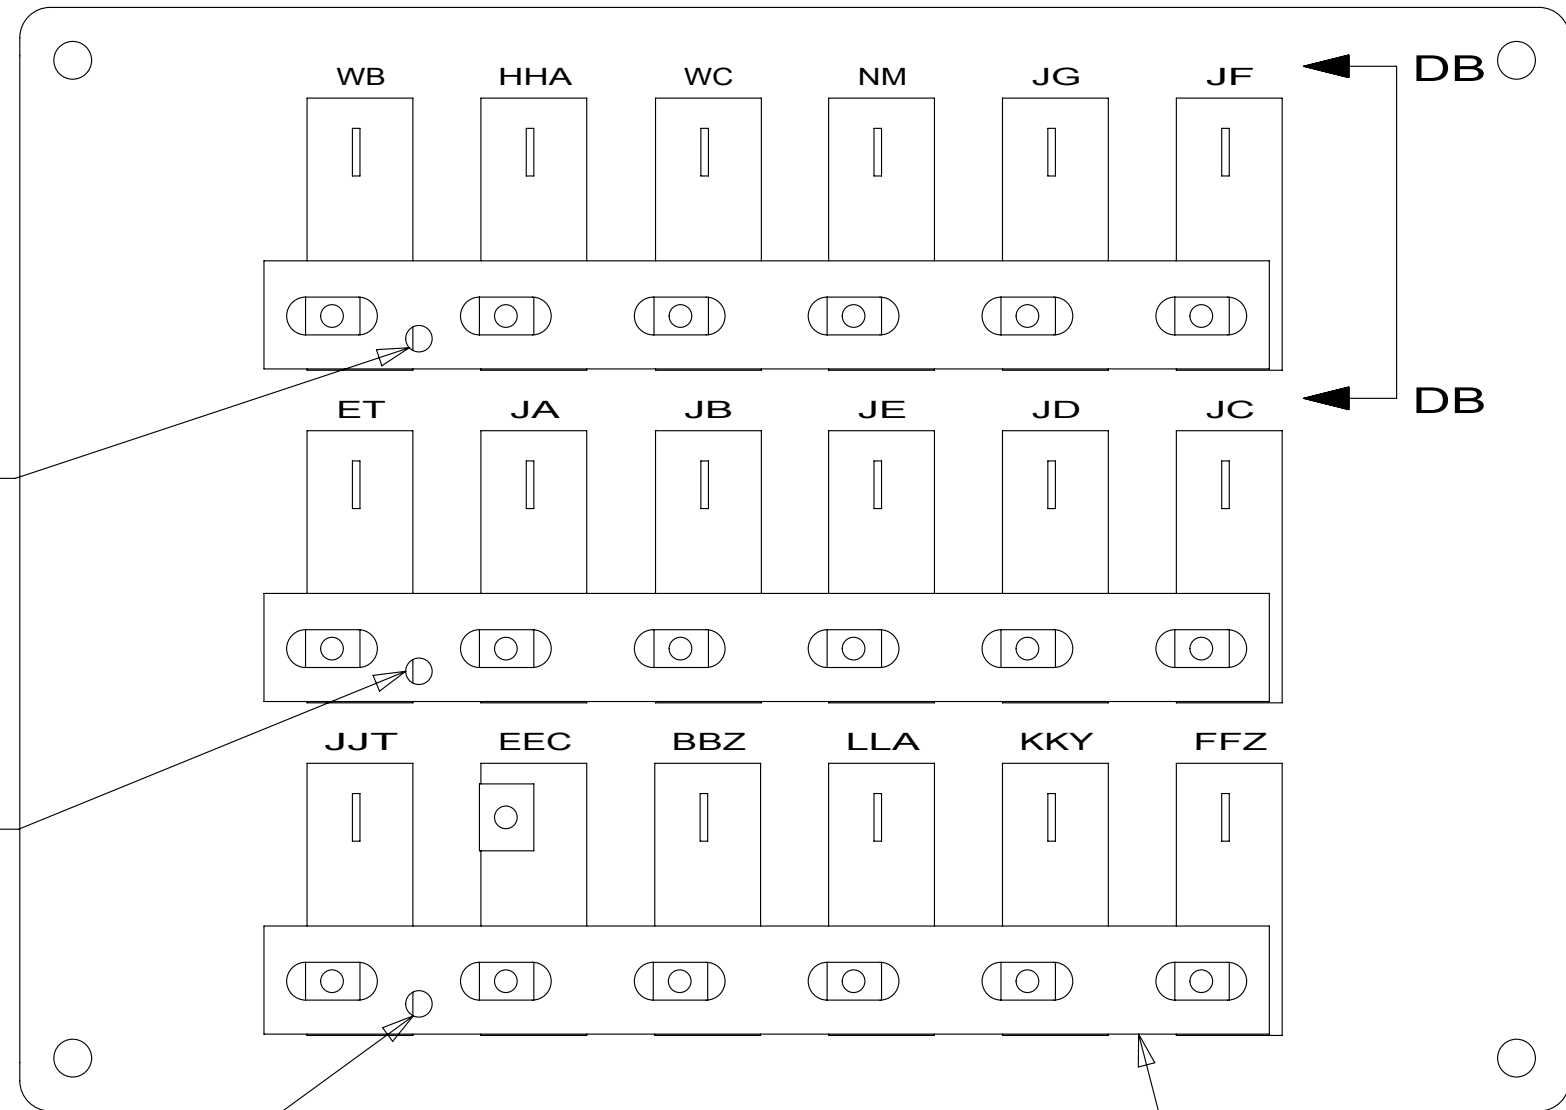FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000









J
6 BLK
FROM WIRE
ASM-CHASSIS
SCREW
000G39-08-06B

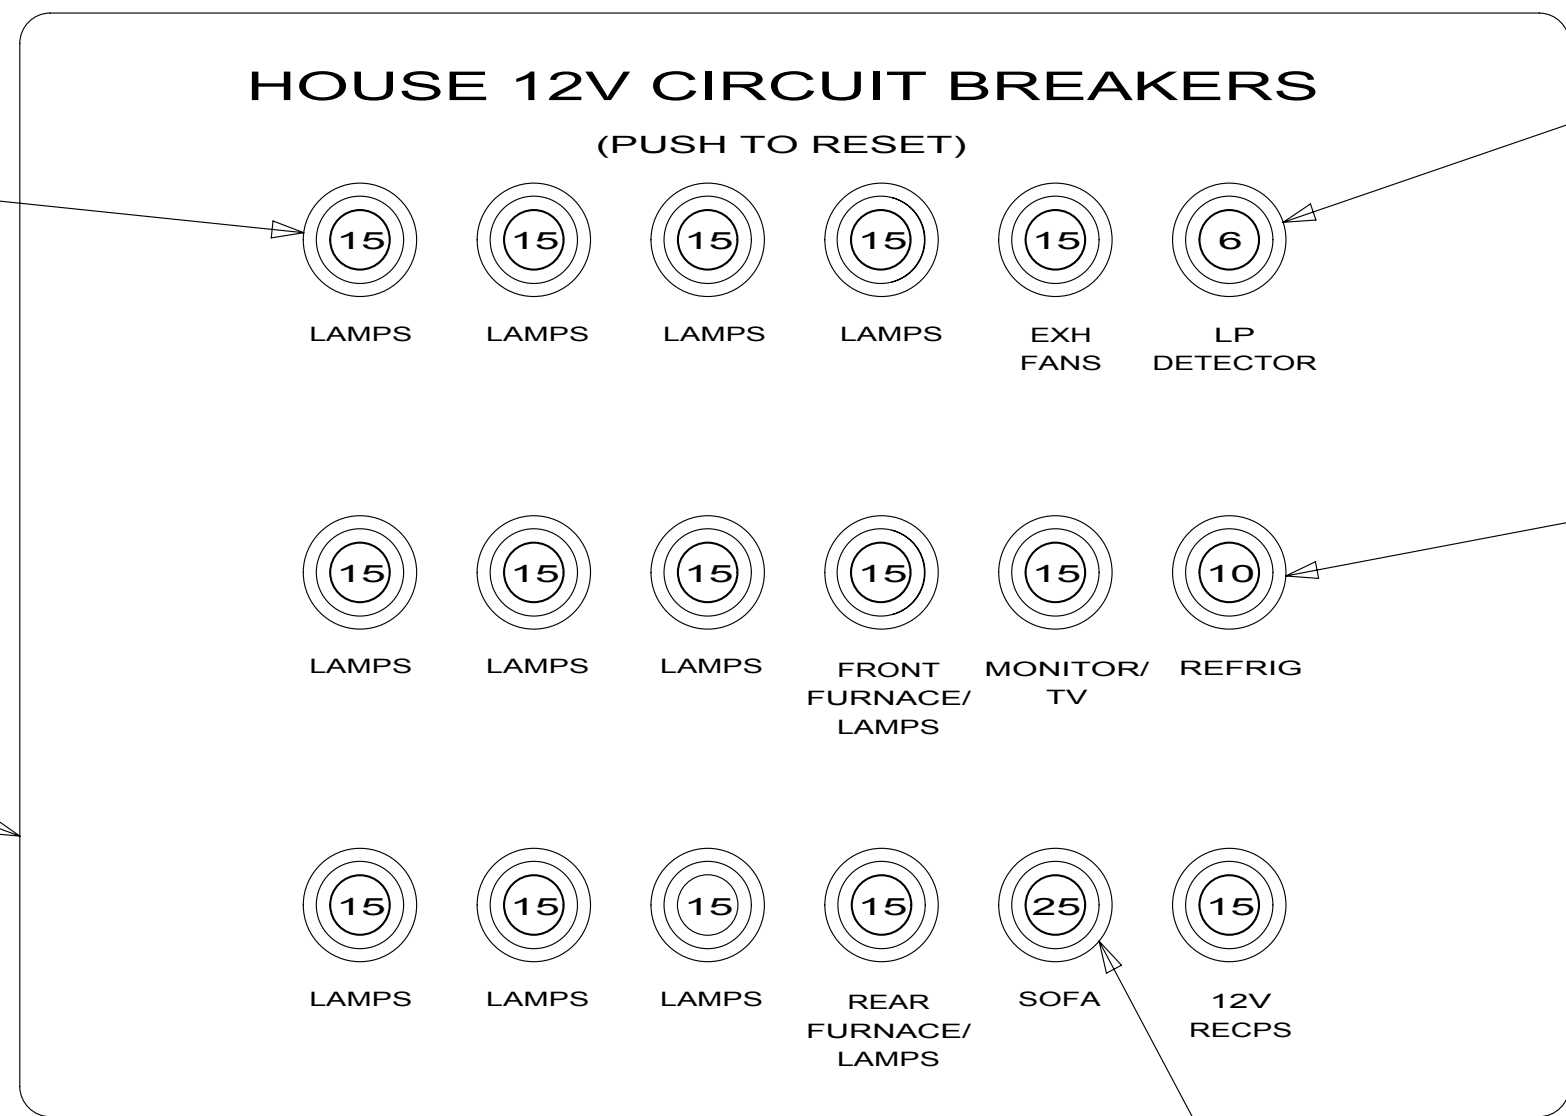
K
6 BLK
FROM WIRE
ASM-CHASSIS
SCREW
000G39-08-06B

Z
6 BLK
FROM WIRE
ASM-CHASSIS
SCREW
000G39-08-06B

BUSS BAR
141744-05-000 (3)
SCREW
000G39-08-06B (3)

DETAIL DA
(BACK VIEW)

CIRCUIT BREAKER
093654-02-000 (15)
(15 AMP)
SCREW
000G52-06-04B (15)
WASHER
OME02B-04-071 (15)




CIRCUIT BREAKER
093654-01-000 (2)
(6 AMP)
SCREW
000G52-06-04B (2)
WASHER
OME02B-04-071 (2)

CIRCUIT BREAKER
093654-05-000 (10 AMP)
SCREW
000G52-06-04B
WASHER
OME02B-04-071


CIRCUIT BREAKER
093655-01-000
SCREW
000G52-06-04B
WASHER
OME02B-04-071

DETAIL DA
(FRONT VIEW)

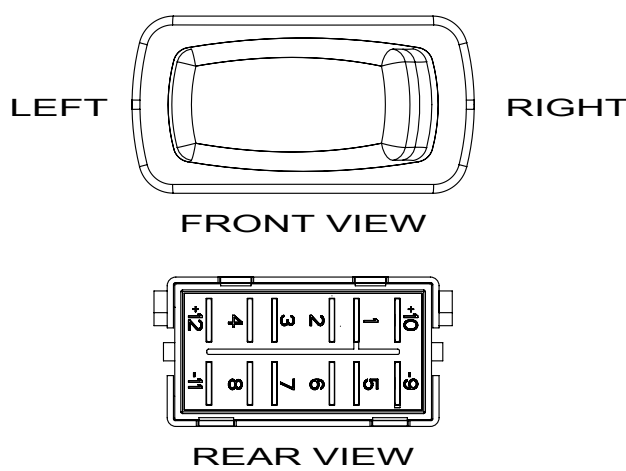PLATE
139067-06-02B
LABEL
092547-14-000
SCREW
000G11-10-12U (4)



DETAIL DD
(MOUNTED HORIZONTALLY)

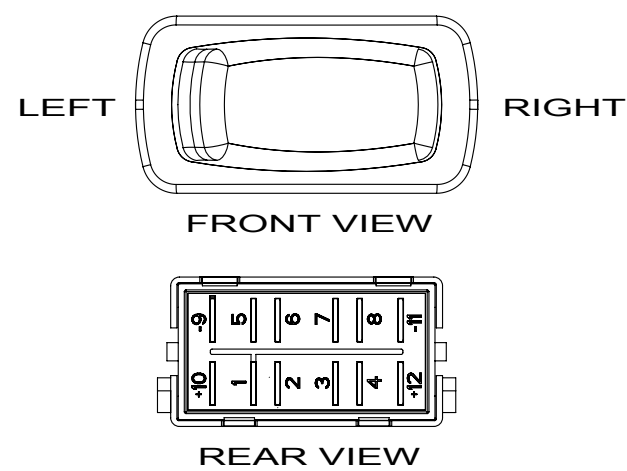

DETAIL DE
(MOUNTED HORIZONTALLY)

SWITCH-AWNING POWER
145638-01-01A
(CONNECT HSG WITH
CIRCUITS FFD,FFT)
DETAIL DD

SWITCH-DOOR AWNING
145638-09-01A
(CONNECT HSG WITH
CIRCUITS FFM,FFL,FFK)
DETAIL DD

SWITCH-PATIO AWNING
145638-05-01A
(CONNECT HSG WITH
CIRCUITS FFR,FFP,FFN)
DETAIL DD

SWITCH-AWNING WIND
SPEED SENSOR
145638-03-01A
(CONNECT HSG WITH
CIRCUITS UUK,UUL,UUM)
DETAIL DD

SWITCH-BATTERY DISCONNECT
145638-15-01A
(CONNECT HSG WITH
CIRCUITS TTY,TTZ,MU
,UUC,UUB,UUB,UUC,MK)
DETAIL DE

PLATE
164352-04-02B
APPLIQUE
159671-13-01A
SCREW
000G67-10-12D (4)

LEVELING SYSTEM
CONTROL PANEL
(REF)

LIGHT-COURTESY
108354-01-01A
SCREW
000G11-08-12U(4)
CONNECTOR
058028-01-000(2)

PLATE
164352-01-02B
APPLIQUE
159671-15-01A
SCREW
000G67-10-12T (2)

SWITCH-LAMP
145638-01-01A
(CONNECT HSG WITH
CIRCUITS JF,HA)
DETAIL DE

SWITCH-COVER
145638-09-01A
(CONNECT HSG WITH
CIRCUITS GX,HHC,
KA,KA,HHD,GX)
DETAIL DE

SWITCH-CEILING LIGHT
145638-10-01A
(CONNECT HSG WITH
CIRCUITS FFW,PL,FFX)
DETAIL DD

SWITCH-PORCH
145638-01-01A
(CONNECT HSG WITH
CIRCUITS JF,PJ)
DETAIL DD

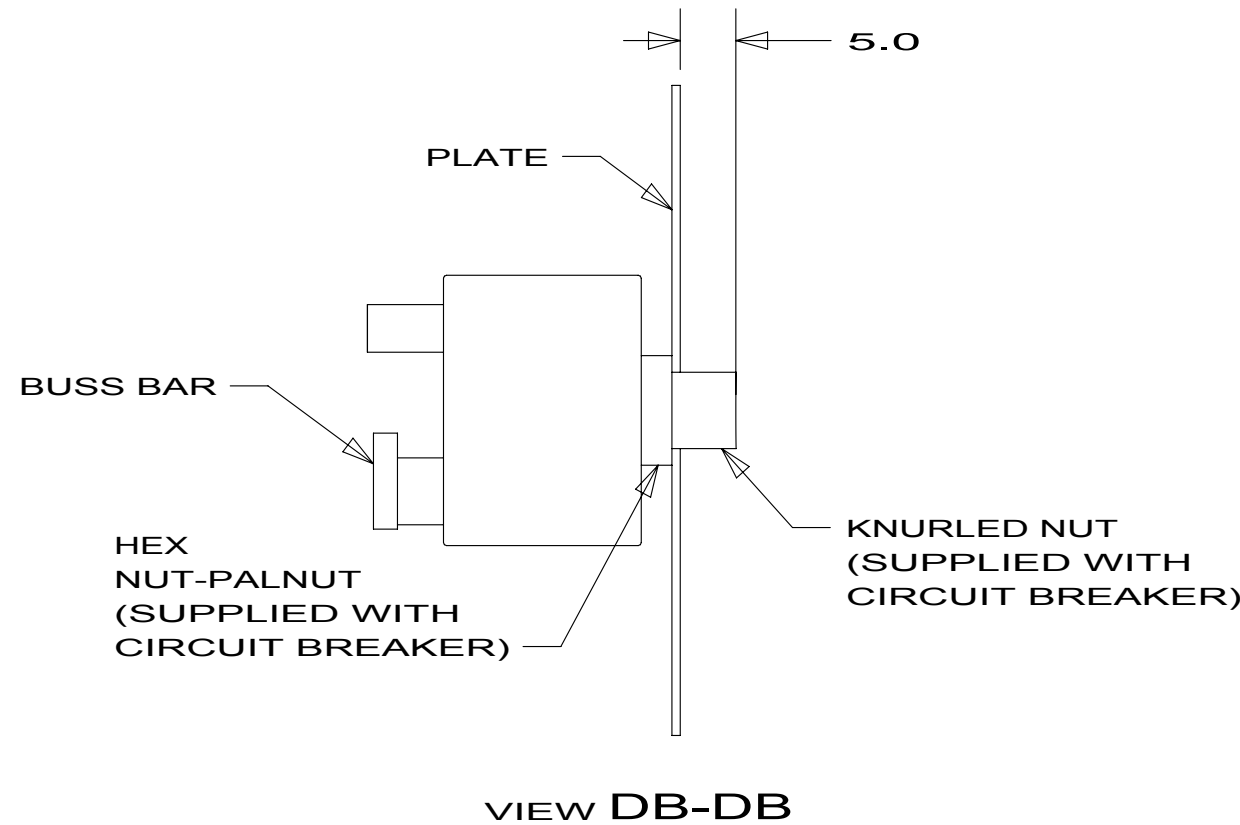
SWITCH-DOOR LOCKS
145638-05-01A
(CONNECT HSG WITH
CIRCUITS PY,MK,PX)
DETAIL DD

SWITCH-COMPT LIGHTS
145638-01-01A
(CONNECT HSG WITH
CIRCUITS WC,NW)
DETAIL DD

SWITCH-BATTERY DISCONNECT
145638-15-01A
(CONNECT HSG WITH
CIRCUITS KF,LH
,LJ,LJ,LG,KF)
DETAIL DE

SWITCH-STEP
145638-16-01A
(CONNECT HSG WITH
CIRCUITS ER,ES)
DETAIL DE

DETAIL DC



VIEW DB-DB

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

63N AWNING-ENTRY, ELECTRIC
527 AWNING-PATIO ELECTRIC 110V
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA


1B1 265

FIRST USED		
10 P40T		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 4	PART NO 172496	REV

- 4 SCREW RELAY HOUSING TO SIDEWALL WITH SCREW 000G11-10-12U.
- 3 WITH SWITCH INSTALLED, THIS SIDE OF SWITCH WILL FACE LEFT SIDEWALL.
- 2 DETAIL IS LOOKING AT SWITCH FROM THE BACKSIDE OF SWITCH WHEN IT IS INTALLED.

1. ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INTALLATION.

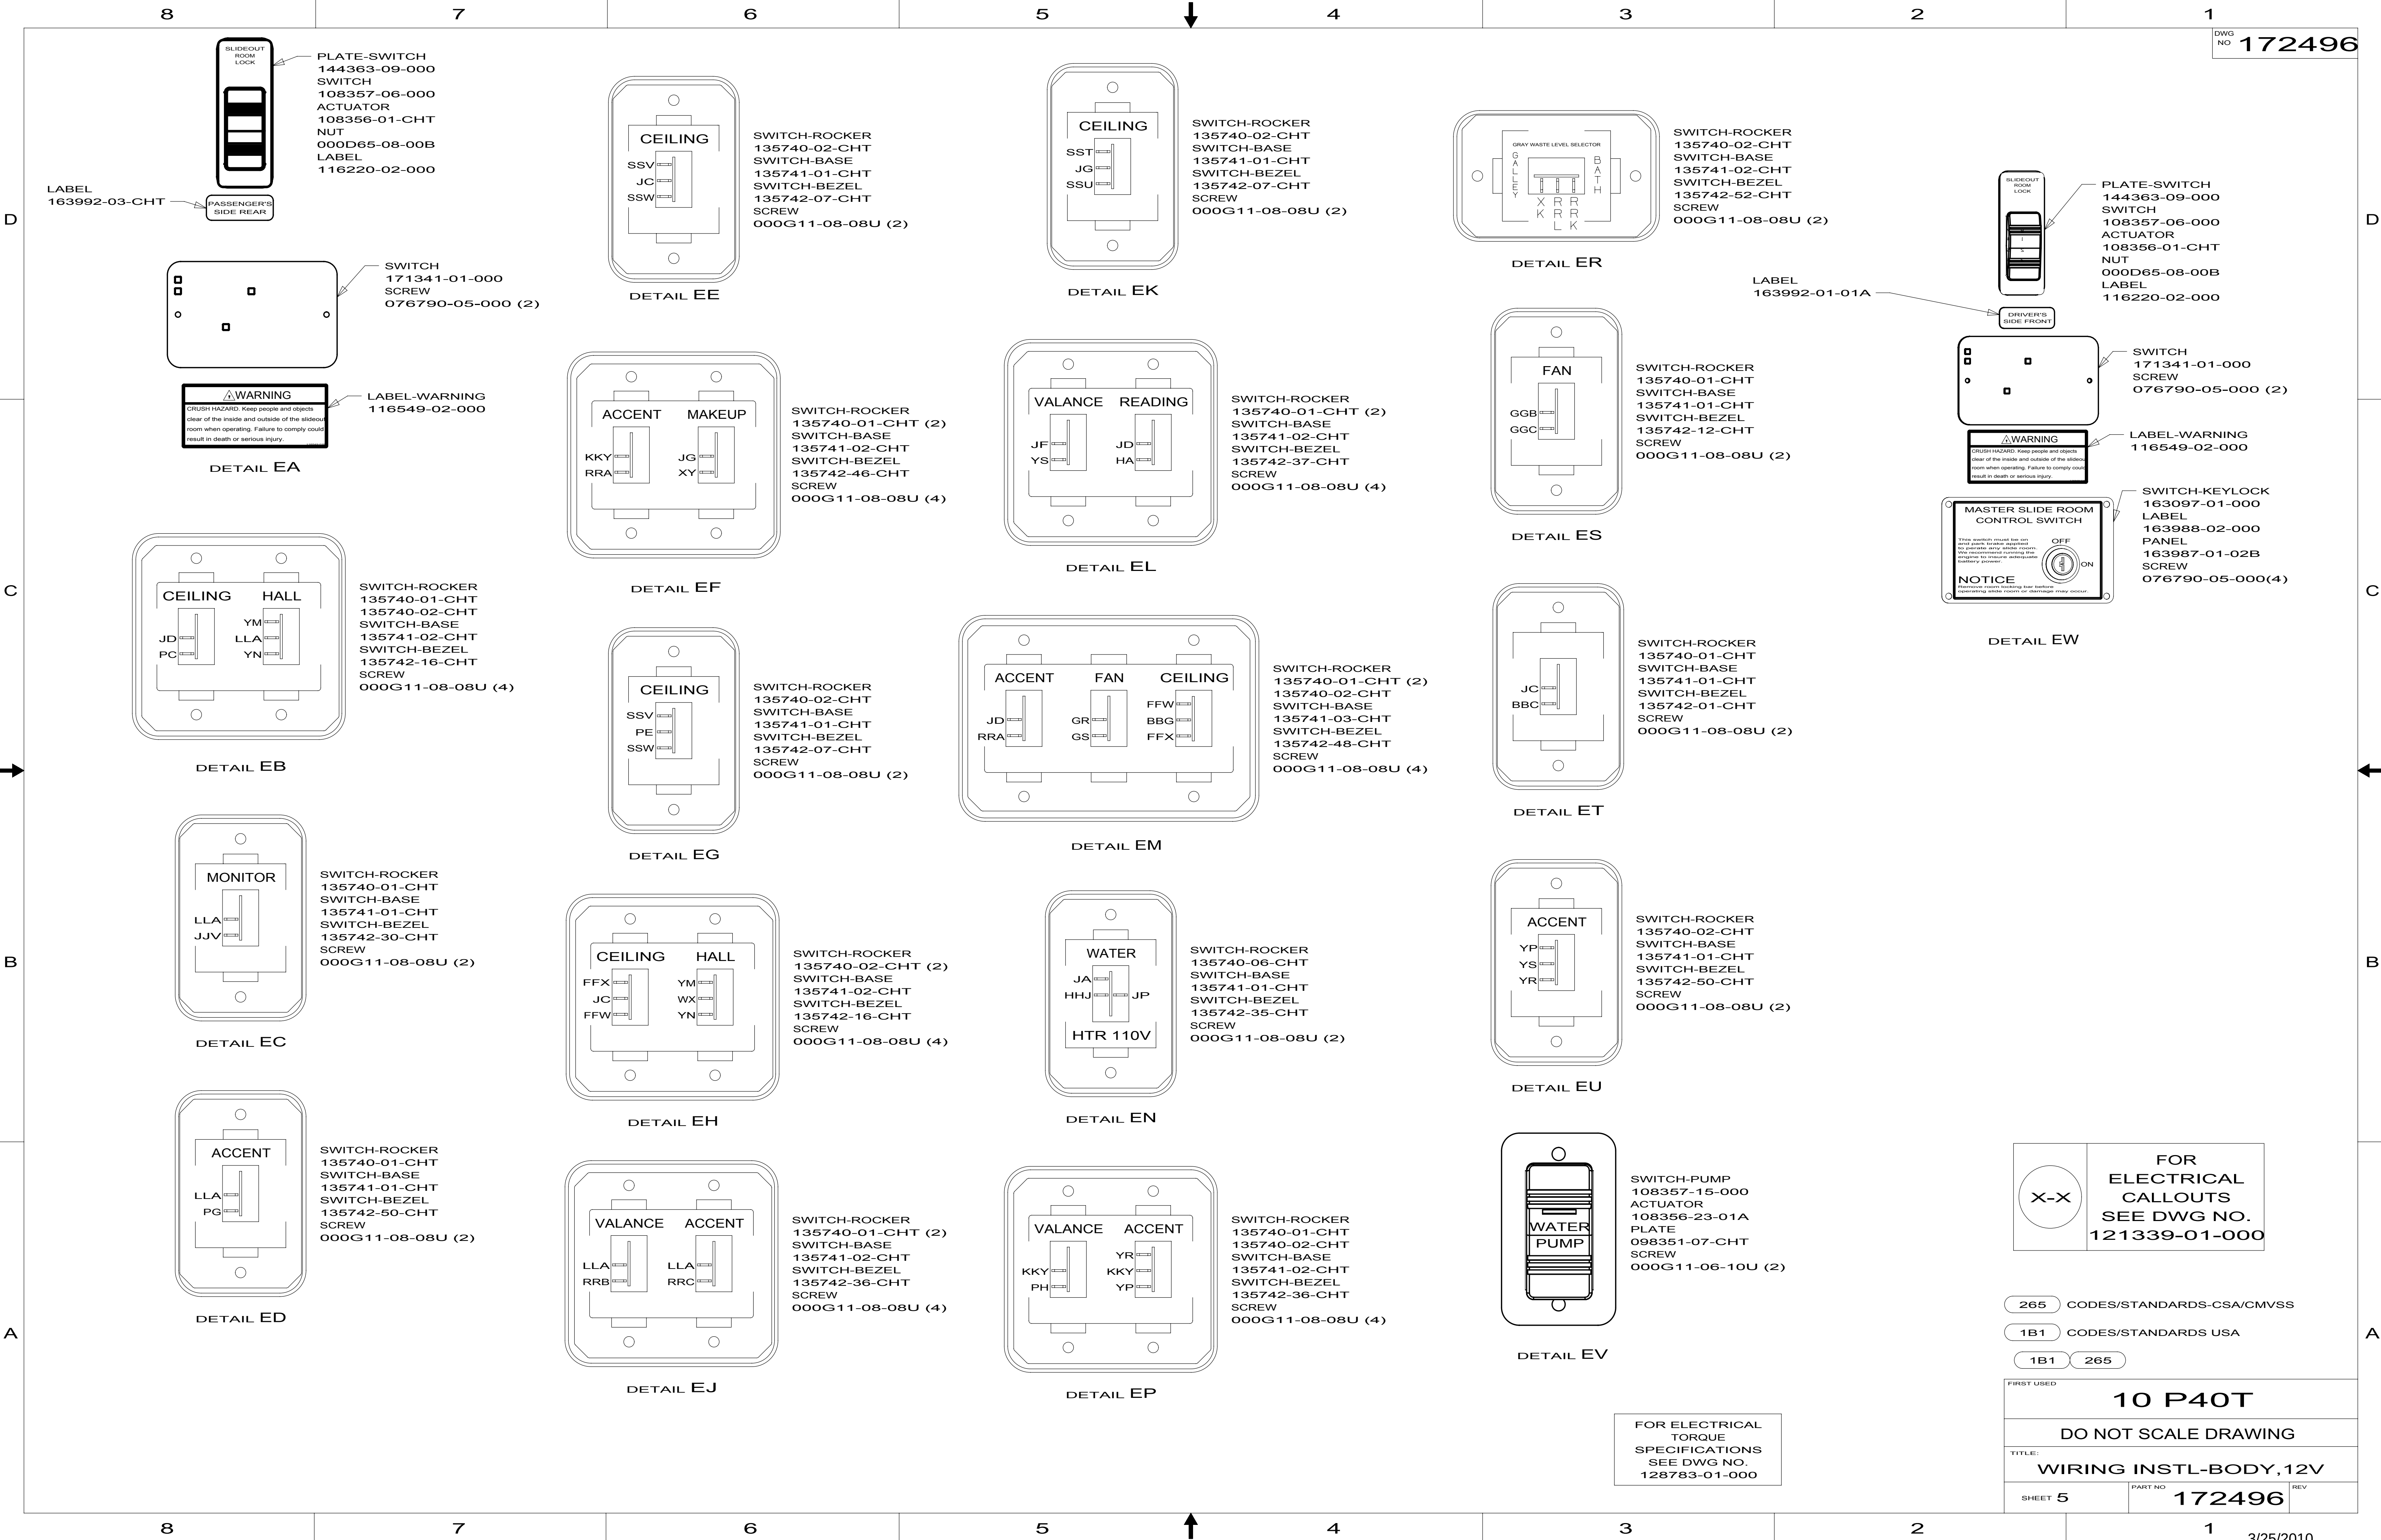NOTES:




FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

FIRST USED		
10 P40T		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-BODY, 12V		
SHEET 5	PART NO	REV
	172496	

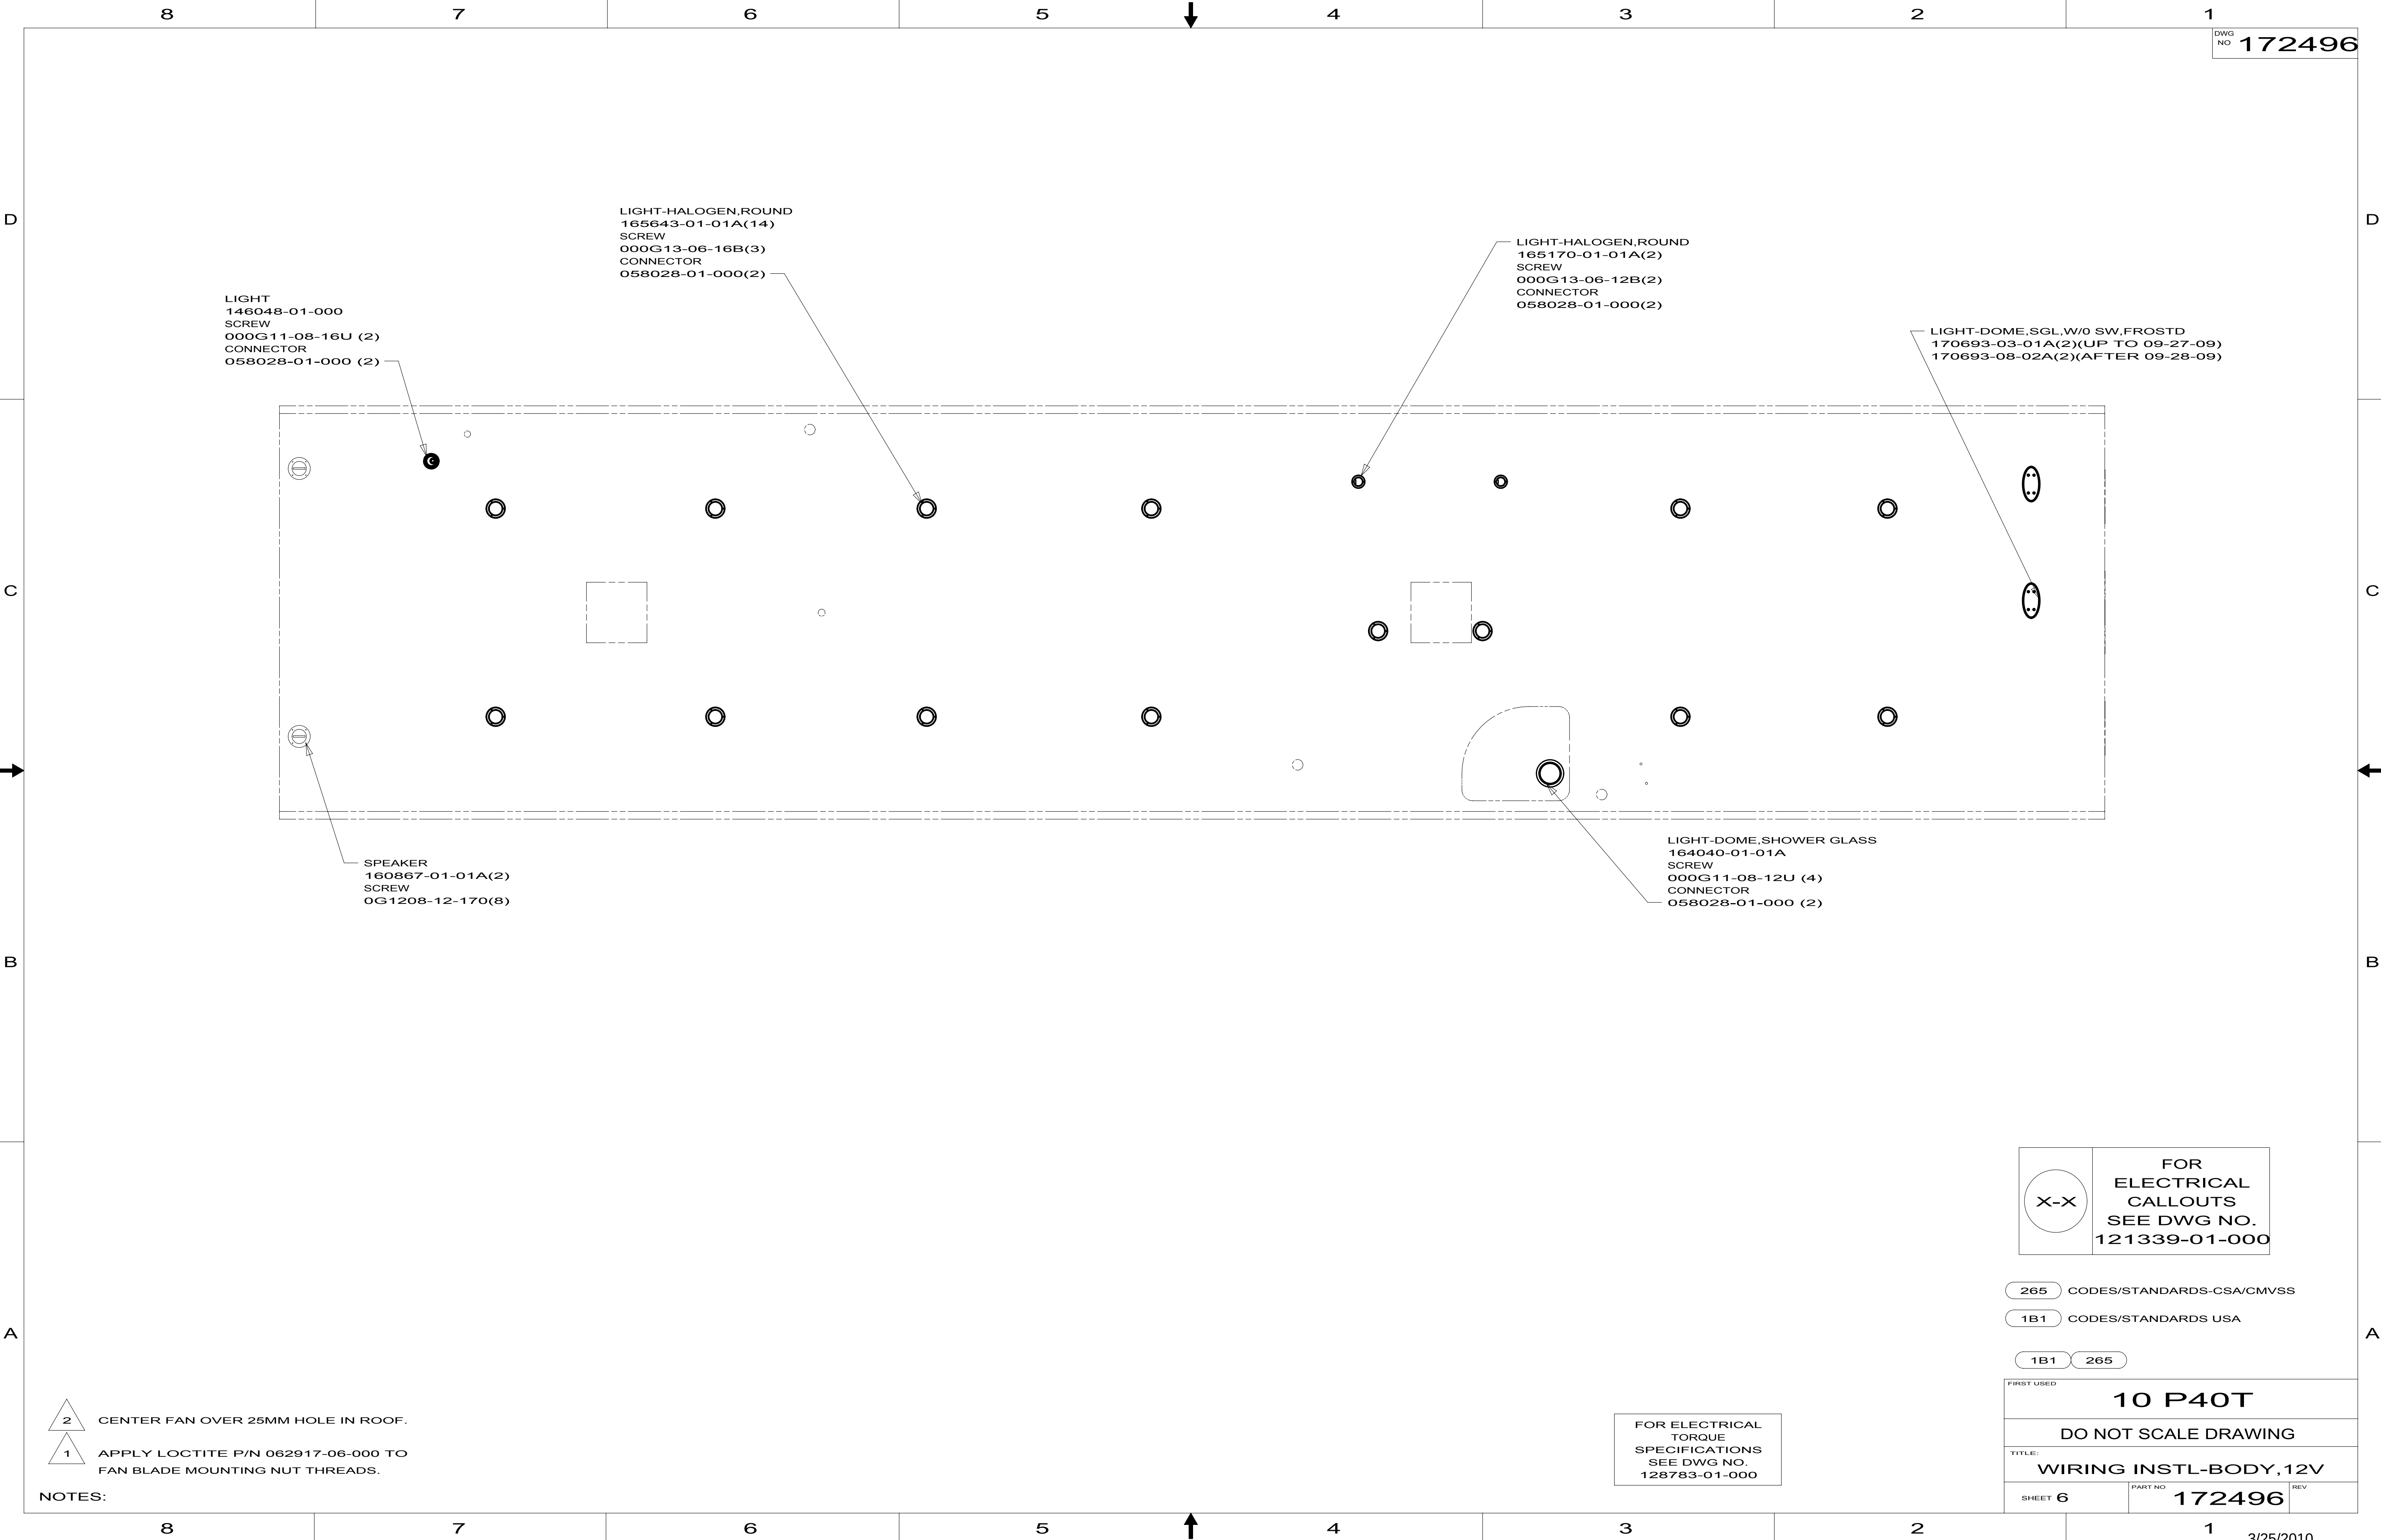

DWG NO 172496

LIGHT
146048-01-000
SCREW
000G11-08-16U (2)
CONNECTOR
058028-01-000 (2)

LIGHT-HALOGEN,ROUND
165643-01-01A(14)
SCREW
000G13-06-16B(3)
CONNECTOR
058028-01-000(2)

LIGHT-HALOGEN,ROUND
165170-01-01A(2)
SCREW
000G13-06-12B(2)
CONNECTOR
058028-01-000(2)

LIGHT-DOME,SGL,W/O SW,FROSTD
170693-03-01A(2)(UP TO 09-27-09)
170693-08-02A(2)(AFTER 09-28-09)

SPEAKER
160867-01-01A(2)
SCREW
OG1208-12-170(8)

LIGHT-DOME,SHOWER GLASS
164040-01-01A
SCREW
000G11-08-12U (4)
CONNECTOR
058028-01-000 (2)

FOR ELECTRICAL
X-X
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P40T		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-BODY, 12V		
SHEET 6	PART NO 172496	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

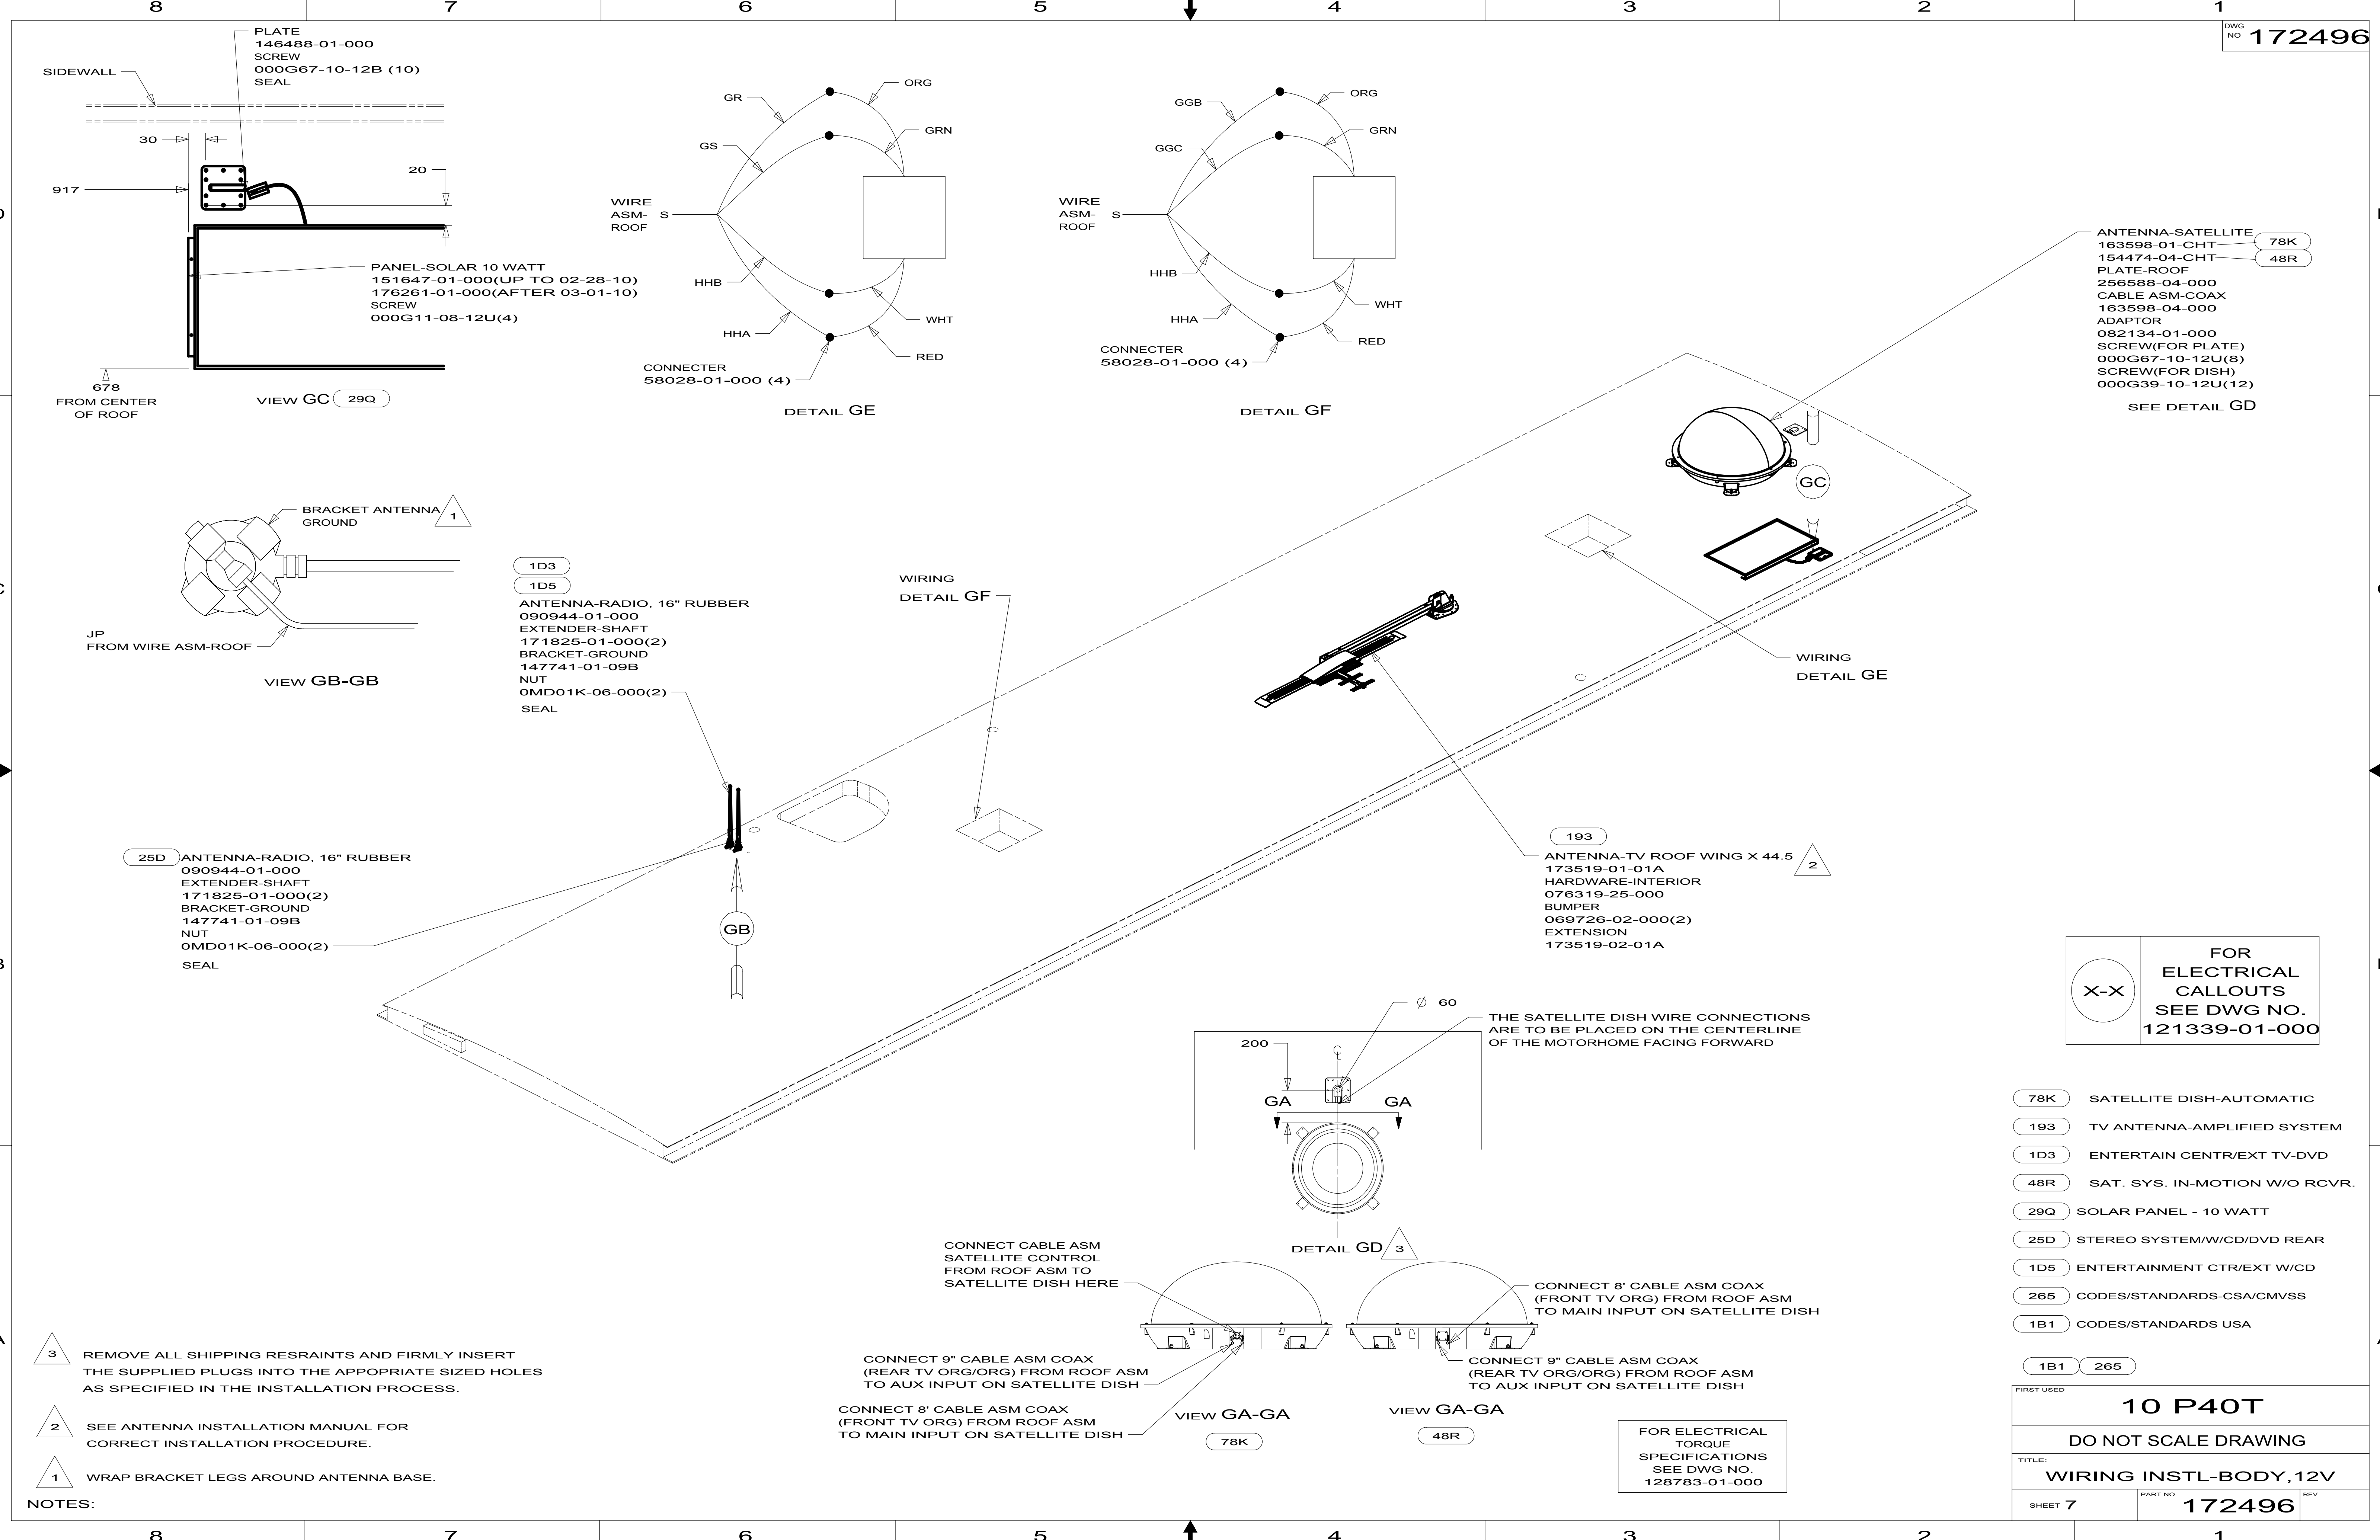NOTES:
2 CENTER FAN OVER 25MM HOLE IN ROOF.
1 APPLY LOCTITE P/N 062917-06-000 TO
FAN BLADE MOUNTING NUT THREADS.





FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 78K SATellite DISH-AUTOMATIC
- 193 TV ANTENNA-AMPLIFIED SYSTEM
- 1D3 ENTERTAIN CENTR/EXT TV-DVD
- 48R SAT. SYS. IN-MOTION W/O RCVR.
- 29Q SOLAR PANEL - 10 WATT
- 25D STEREO SYSTEM/W/CD/DVD REAR
- 1D5 ENTERTAINMENT CTR/EXT W/CD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FIRST USED		10 P40T	
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-BODY, 12V			
SHEET 7	PART NO	172496	REV

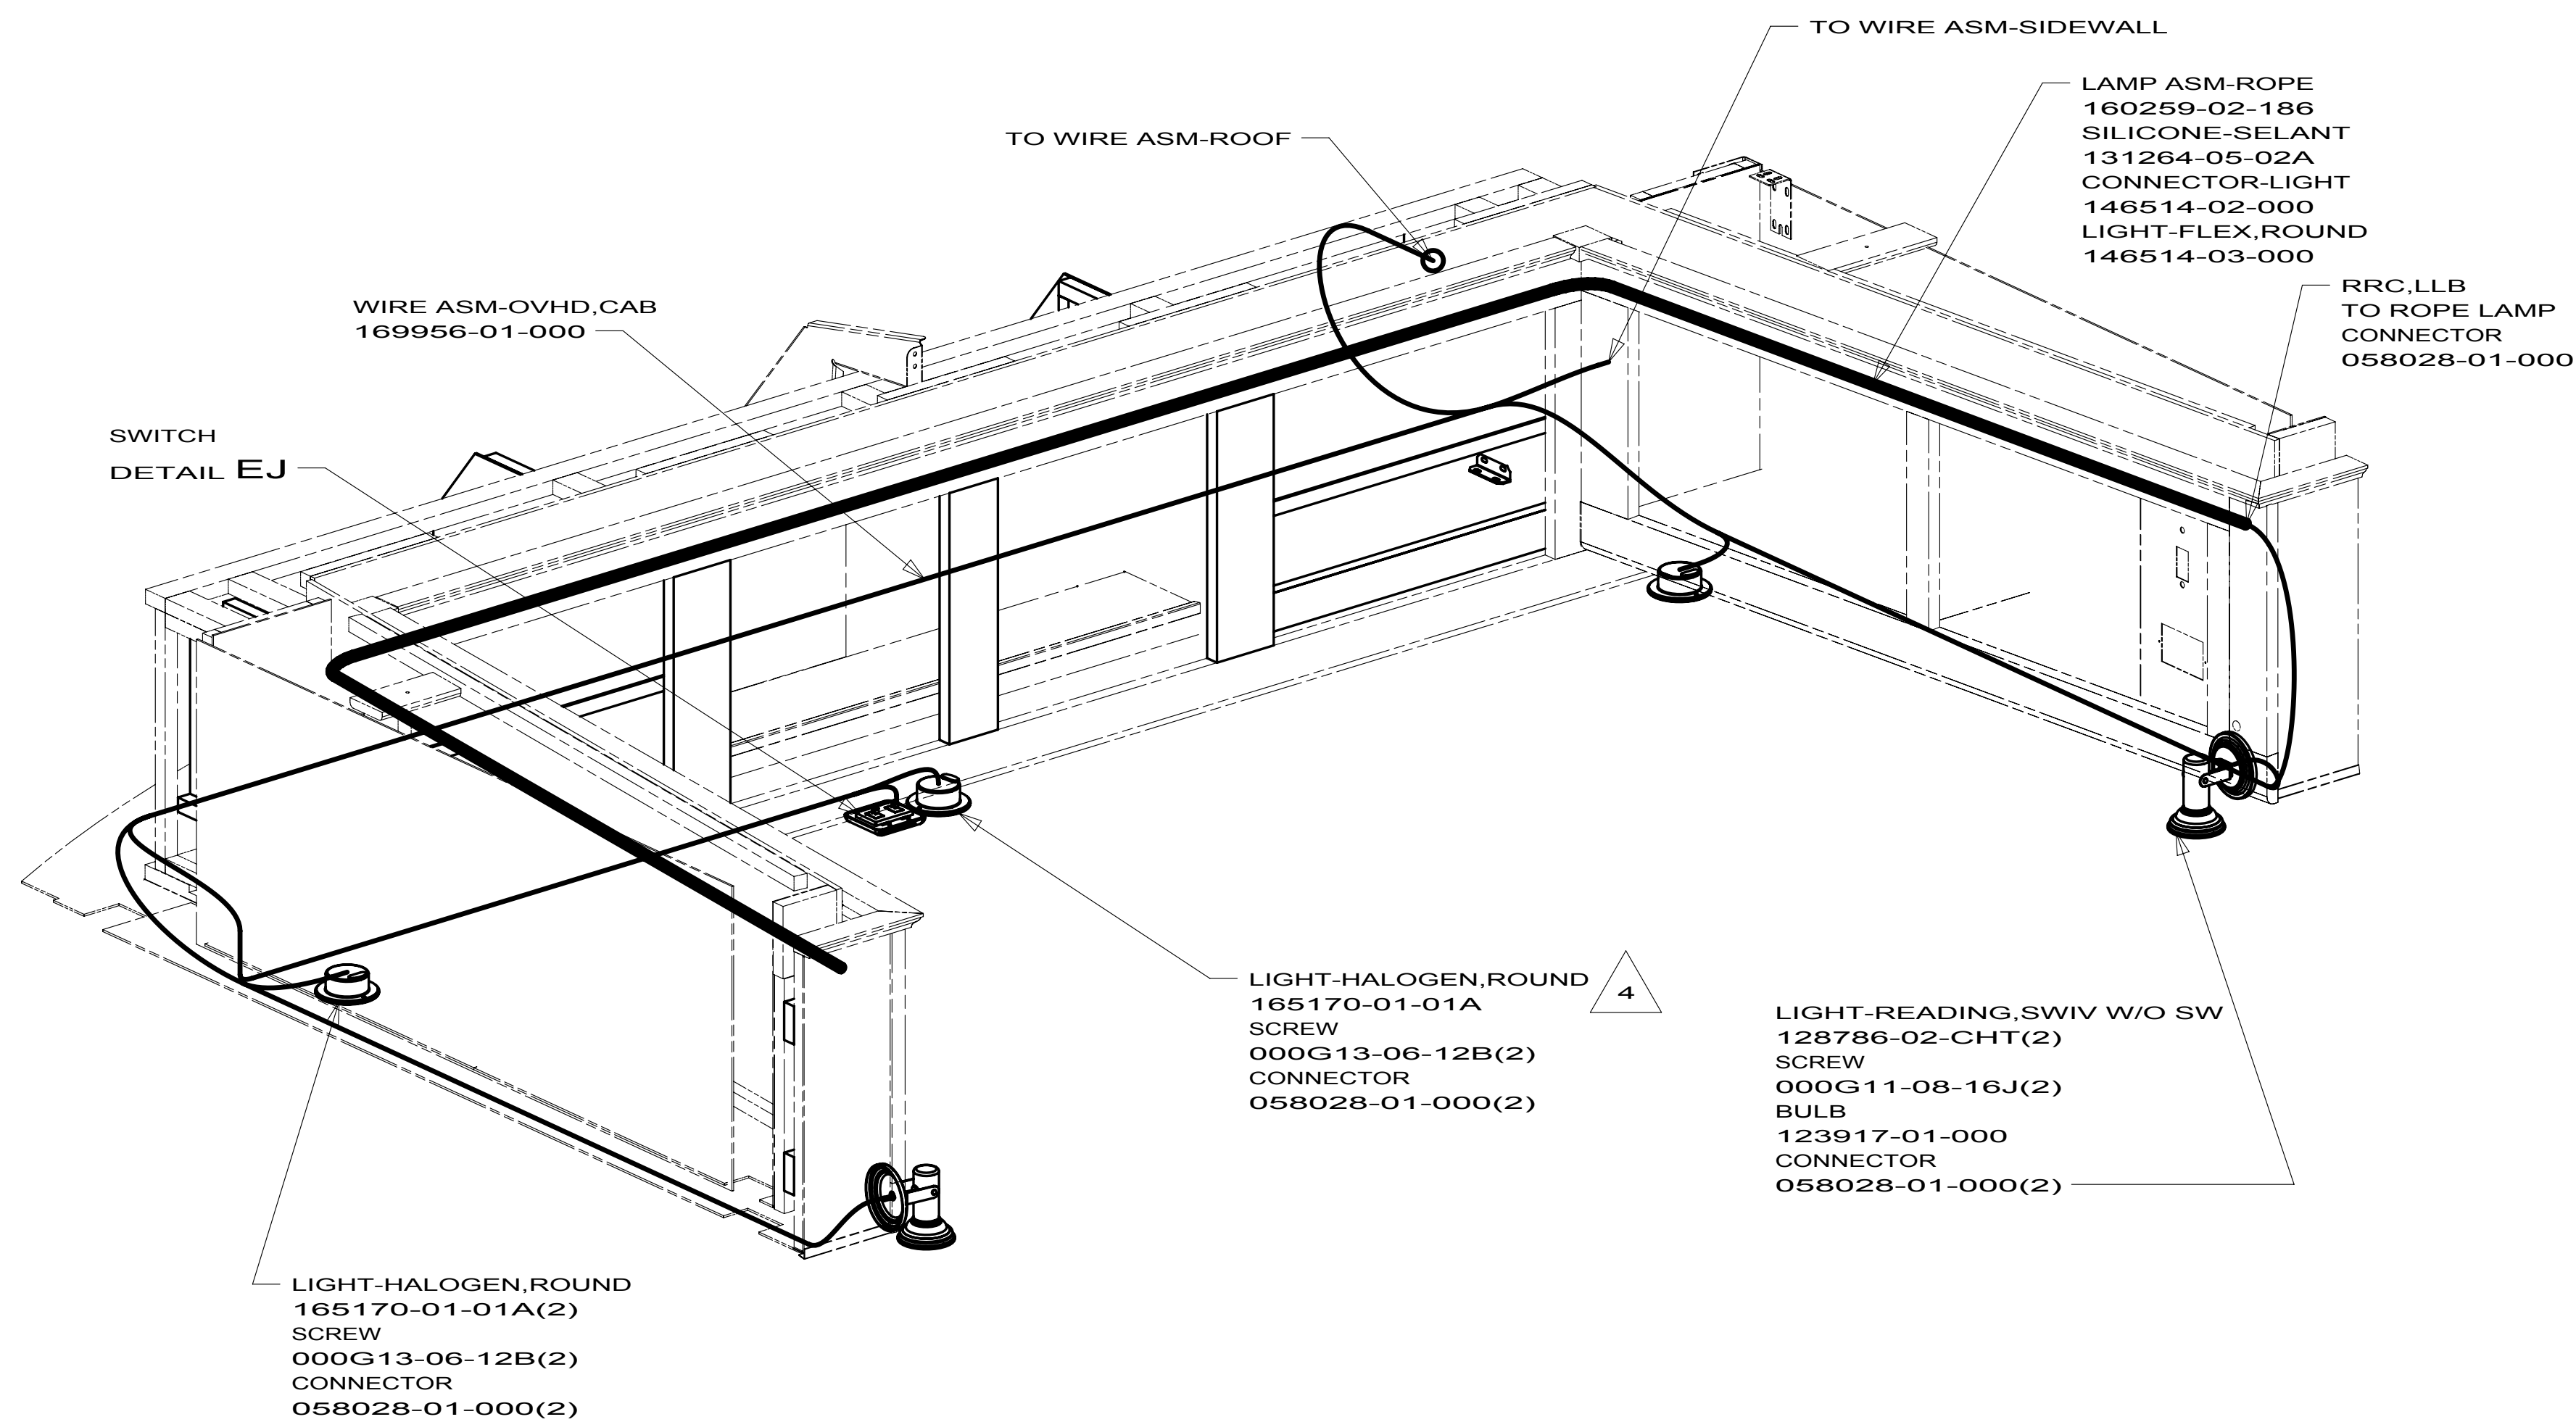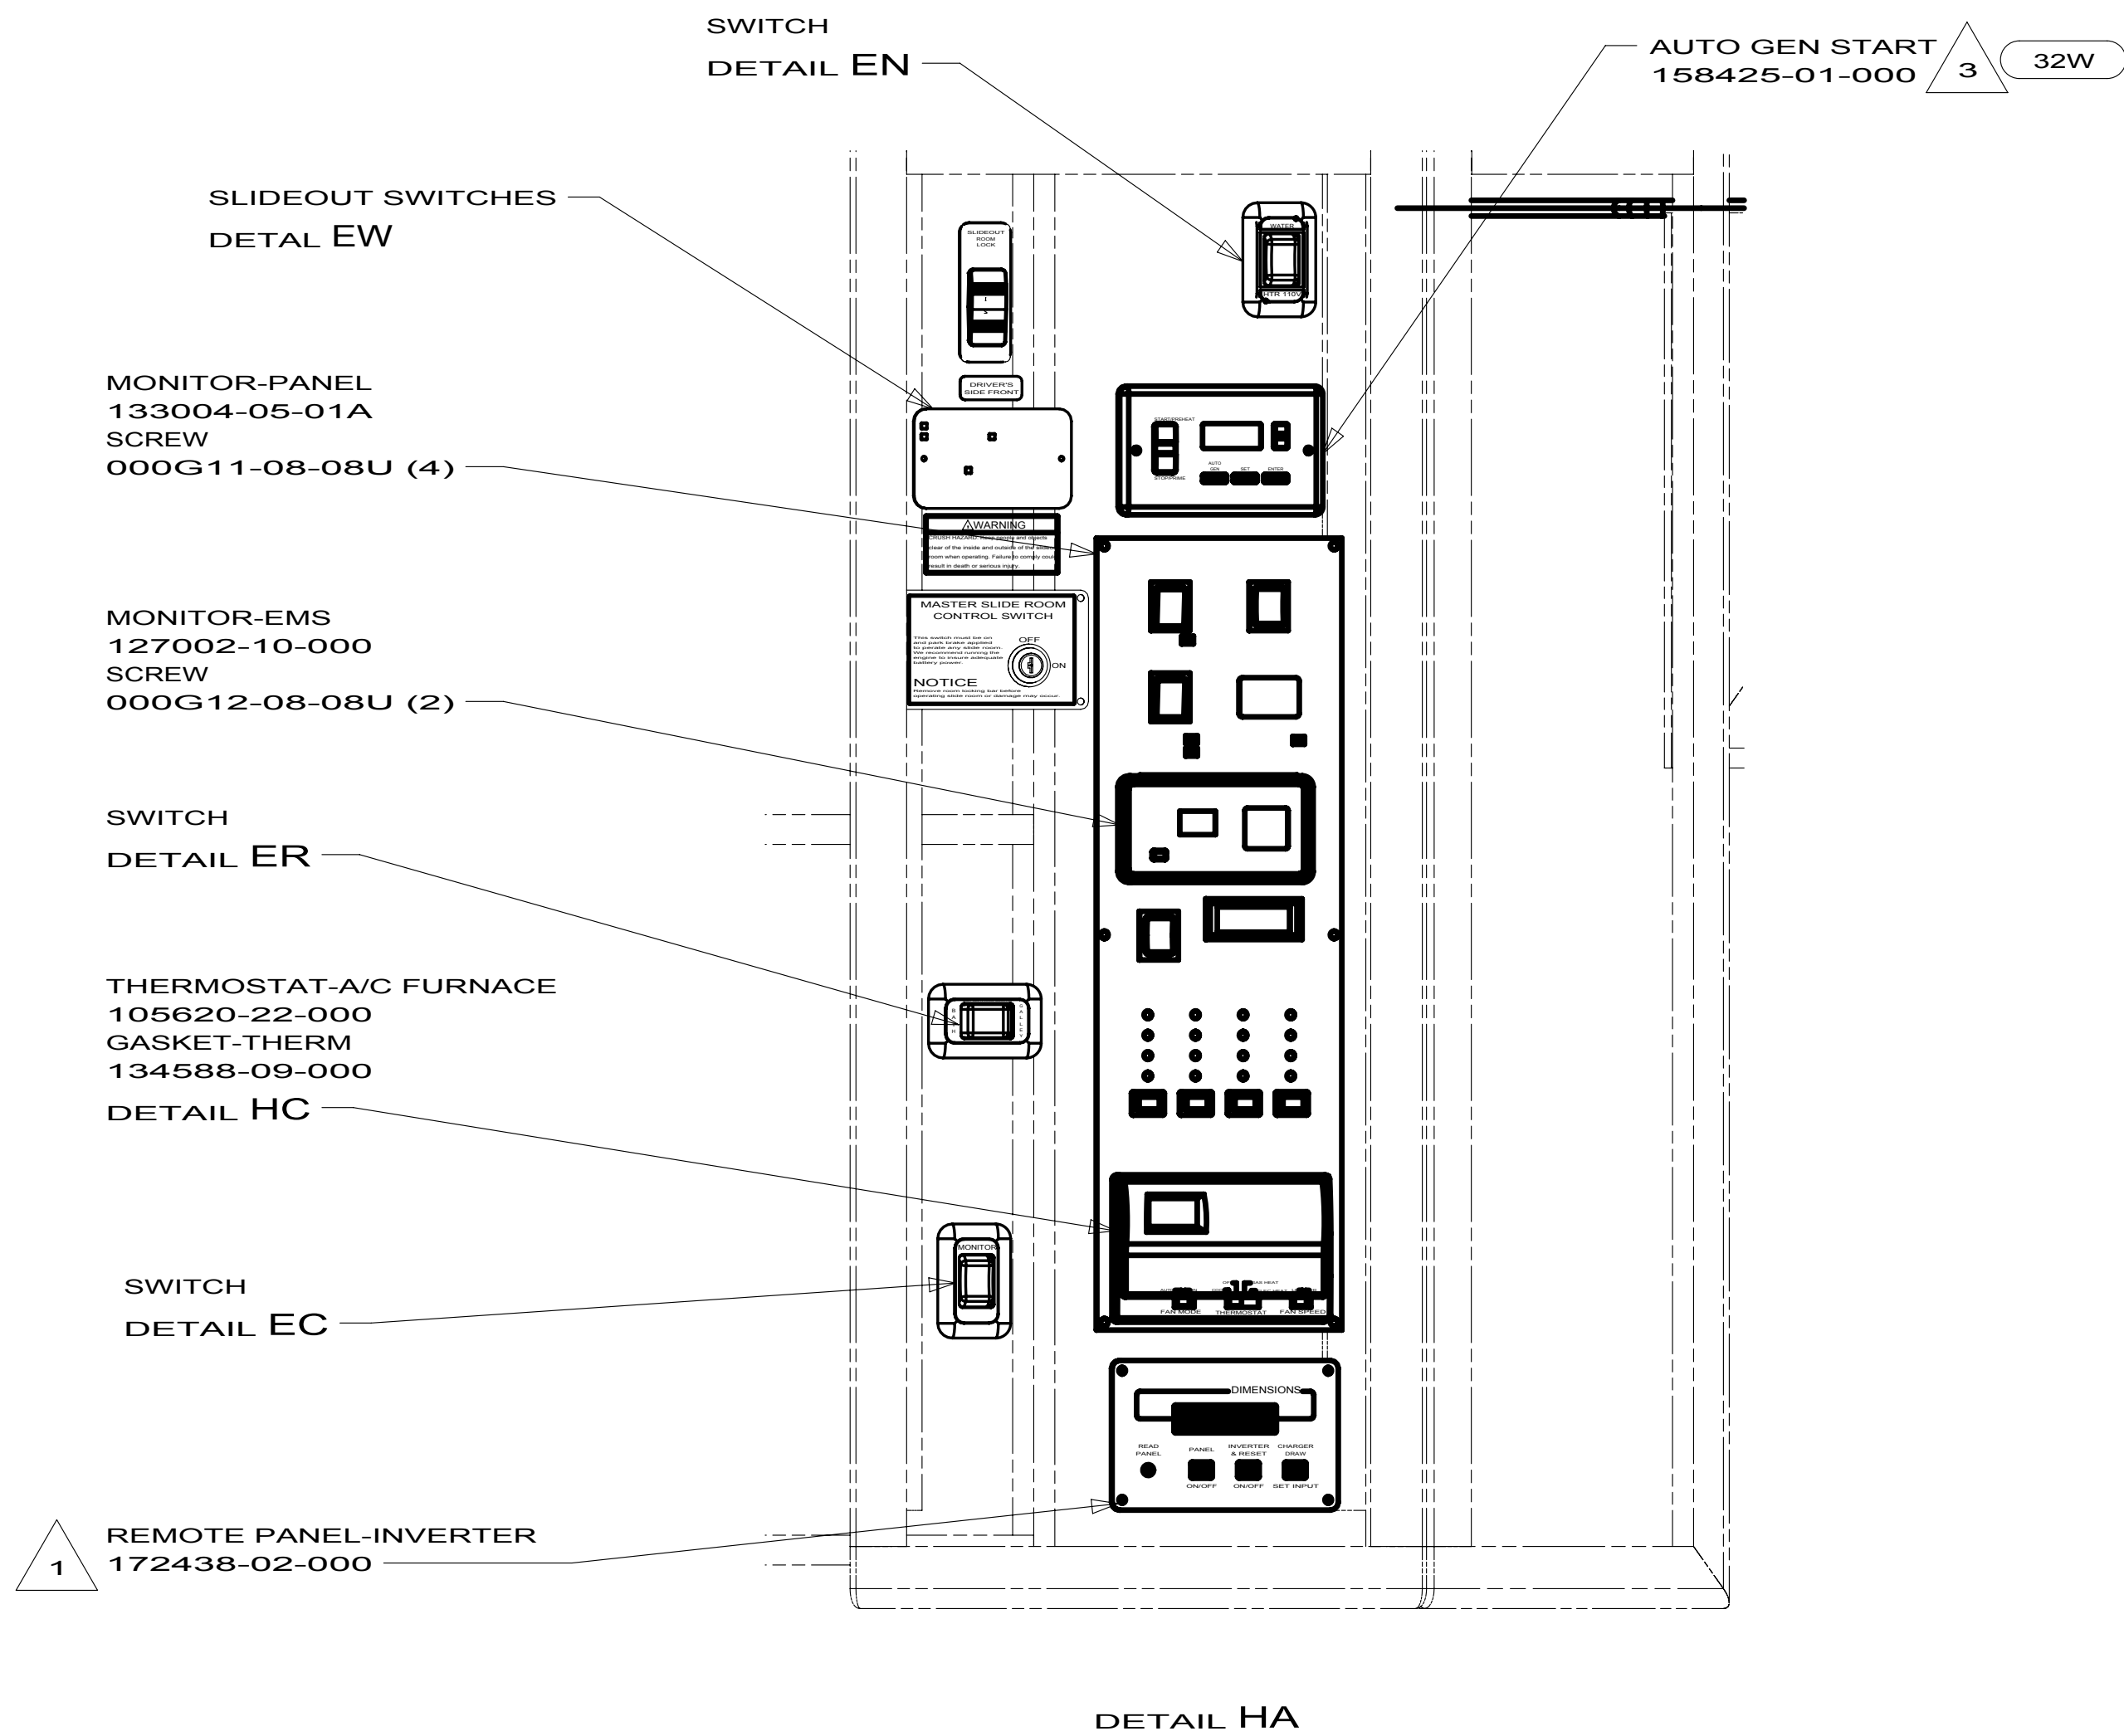FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000



- 4 WITHOUT 61E
- 3 UPON FIRST POWER-UP THE DISPLAY PANEL WILL PROMPT FOR " GEN TYPE". USE THE ARROW KEYS AND SCROLL TO "QD 6/8" AND PRESS ENTER. NEXT, IT WILL PROMPT FOR "SAFE TYPE". USE THE ARROW KEYS TO SCROLL TO "IGNITION" AND PRESS ENTER. SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION.
- 2 INSTALL GASKET ON BACK SIDE OF ONE PLACE AFTER INSTALLATION OF THERMOSTAT, MAKING SURE THAT THE GASKET CAVERS AND SEALS THE HOLE THAT THE WIRES PASS THROUGH.
- 1 CONNECT CIRCUIT WB FROM COACH WIRING TO RED WIRE ON REMOTE PANEL.

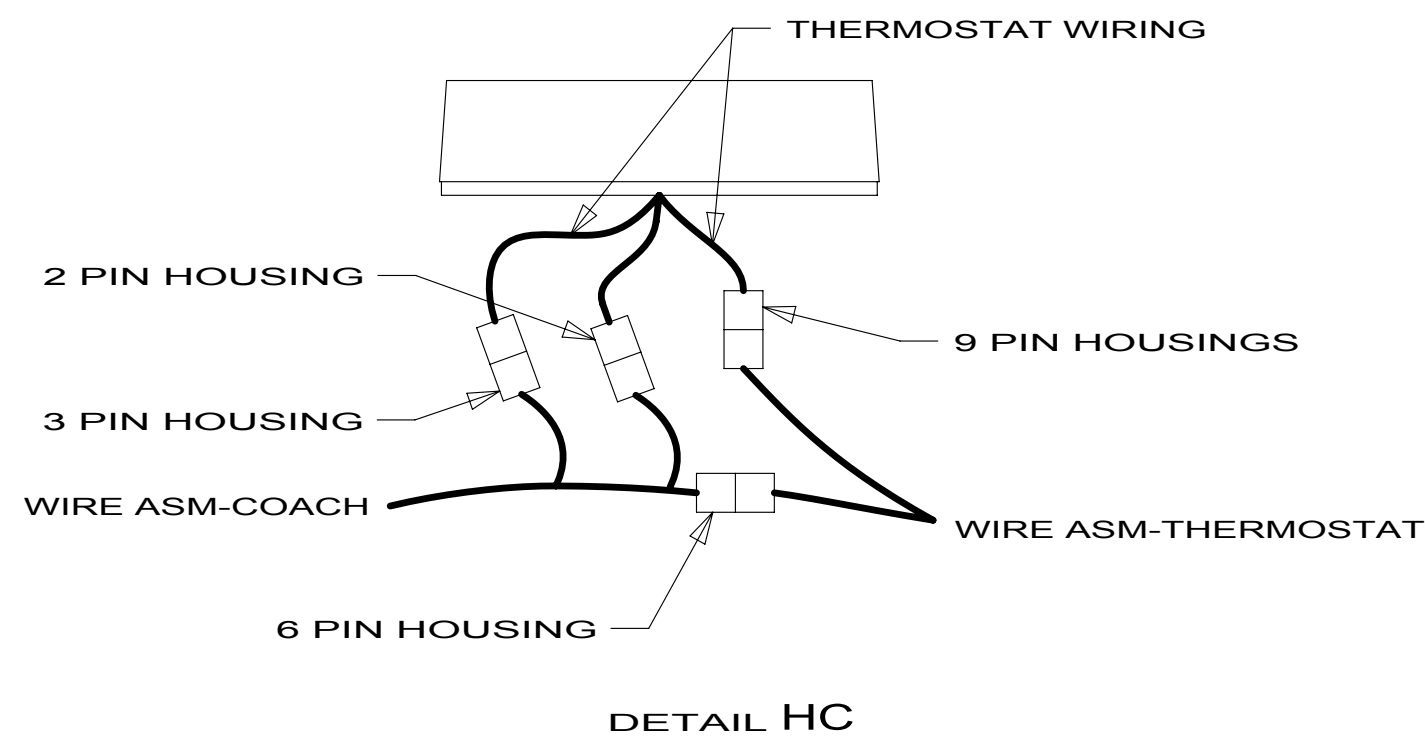NOTES:



FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 61E TV(FRONT)-26" COLOR STEREO
- 32W GENERATOR-START,AUTO SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

10 P40T

DO NOT SCALE DRAWING


TITLE:
WIRING INSTL-BODY,12V

SHEET 8

PART NO

172496

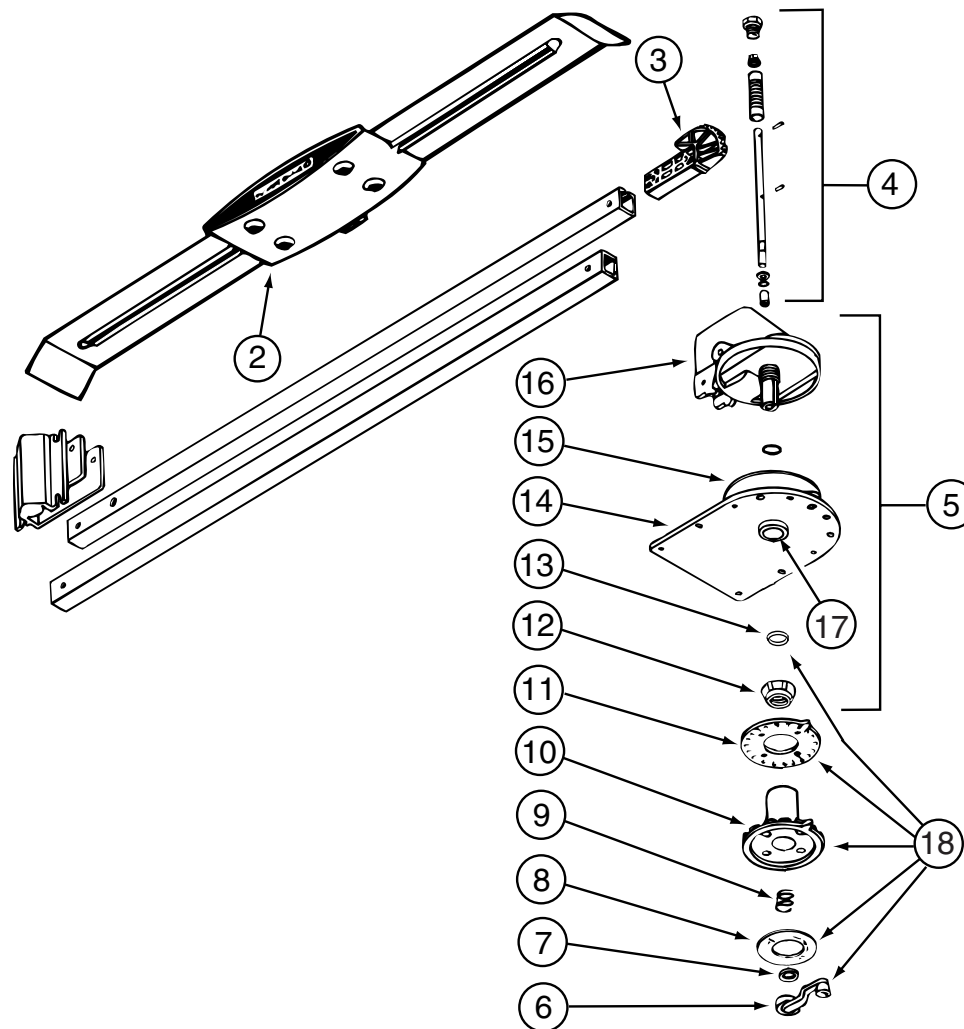REV



076319-25-000

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
6	076319-01-706	EA	CRANK-W/SET SCREW UNIV/BEIGE	2750897
6	120233-01-710	EA	HANDLE-CRANK W/SCREW - WHITE	RP-6795
8	076319-01-708	EA	DECAL-CRANK	5413002
10	076319-25-700	EA	DIRECTIONAL HANDLE(WHITE)	3200612
11	076319-25-701	EA	PLATE - CEILING(WHITE)	3200609
13	120233-01-709	EA	WASHER-NYLON	RP-2658
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

KEY	PART NUMBER	U/M	DESCRIPTION	108354-01-01A	VENDOR NO.
	108354-01-700	EA	BULB-COURTESY LIGHT		395-B

KEY	PART NUMBER	U/M DESCRIPTION
1	133004-01-702	EA SWITCH/DPDT MOM=ON-OFF-ON
2	100258-10-701	EA GAUGE-HR METER ONLY (LCD)
3	133004-01-706	EA L.E.D. GREEN-PANEL MOUNT
4	133004-01-704	EA METER/VOLT-DIGITAL - LCD
5	133004-01-705	EA SWITCH/MOM ON - PUSH BUTTON
6	133004-01-703	EA L.E.D. RED-PANEL MOUNT
7	133004-01-701	EA SWITCH/DPDT ON-ON/MAINTAINED
8	133004-02-701	EA SCREENED - CHASSIS
	133004-02-700	EA BOARD - PC

133004-02-01A
VENDOR NO.
 L1011-00
 L0775-00
 L0785
 L1008-00
 L0950-00
 L1009-00
 L1025-00
 CC0547-00
 L5113-03


KEY	PART NUMBER	U/M DESCRIPTION
1	133004-01-702	EA SWITCH/DPDT MOM=ON-OFF-ON
2	100258-10-701	EA GAUGE-HOUR MTR-CLIP ON (LCD)
3	133004-01-706	EA L.E.D. GREEN-PANEL MOUNT
4	133004-01-704	EA METER/VOLT-DIGITAL - LCD
5	133004-01-705	EA SWITCH/MOM ON - PUSH BUTTON
7	133004-01-701	EA SWITCH/DPDT ON-ON/MAINTAINED
8	133004-04-700	EA SCREENED CHASSIS/SUB ASSY
	133004-02-700	EA BOARD - PC

CONTACT WINNEBAGO PARTS SALES FOR MISSING COMPONENTS

133004-04-01A
VENDOR NO.
 L1011-00
 L0775-00
 L0785
 L1008-00
 L0950-00
 L1025-00
 CE0287
 L5113-03

KEY	PART NUMBER	U/M DESCRIPTION
1	133004-01-702	EA SWITCH/DPDT MOM=ON-OFF-ON
2	100258-10-701	EA GAUGE-HR METER ONLY (LCD)
3	133004-01-706	EA L.E.D. GREEN-PANEL MOUNT
4	133004-01-704	EA METER/VOLT-DIGITAL - LCD
5	133004-01-705	EA SWITCH/MOM ON - PUSH BUTTON
6	130004-01-703	EA L.E.D. RED-PANEL MOUNT
7	133004-01-701	EA SWITCH/DPDT ON-ON/MAINTAINED
8	133004-05-700	EA SCREENED CHASSIS
	133004-05-701	EA BOARD - PC

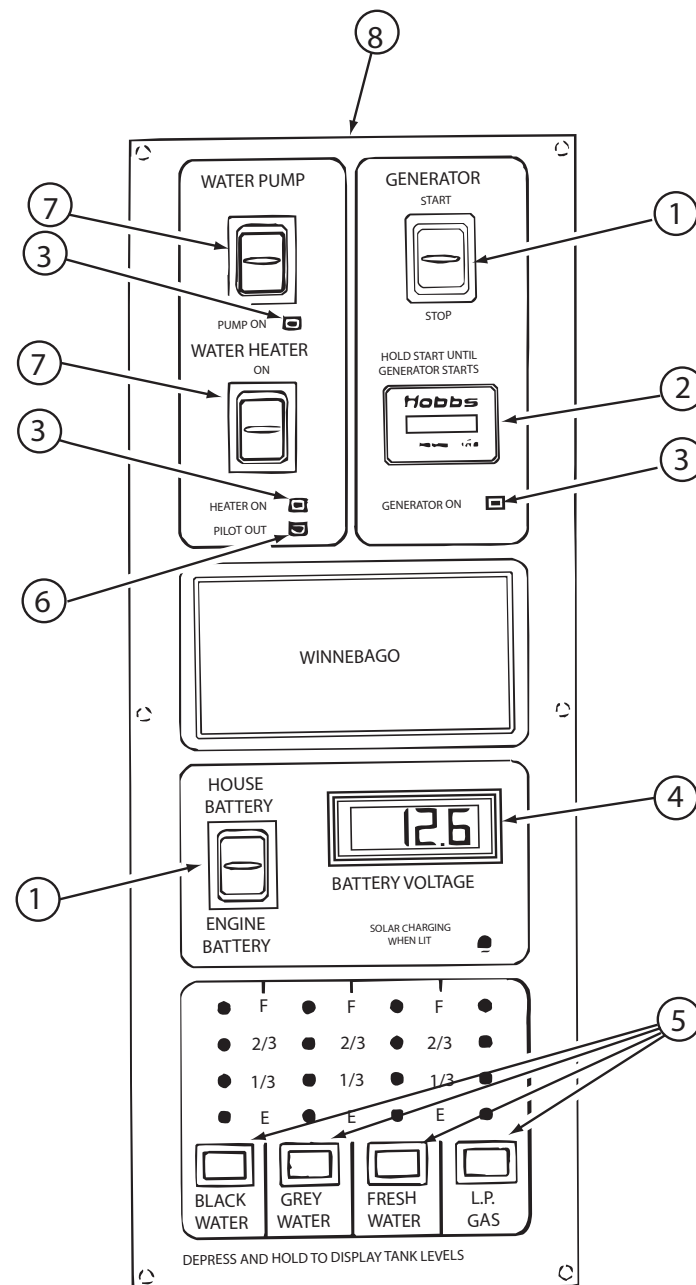133004-05-01A
VENDOR NO.
 L1011-00
 L0775-00
 L0785
 L1008-00
 L0950-00
 L1009-00
 L1025-00
 CC0563-00
 L5130-02



KEY	PART NUMBER	U/M DESCRIPTION	146048-01-01A VENDOR NO.
	123775-01-700	EA BULB - 10 WATT - HALOGEN	71-JC10

154474-04-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	154474-04-703	EA BOARD RF ASSEMBLY N/C	100087
	154474-04-705	EA CABLE OUT DUAL TOP PCBA N/C	20034-1
	154474-04-706	EA LNB DUAL EAGLE ASPEN N/C	1863-1

154474-04-02A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	154474-04-702	EA DOME ONLY-REPLACEMENT-BLACK	1850-B-LP-FS
	154474-04-703	EA BOARD RF ASSEMBLY N/C	100087
	154474-04-705	EA CABLE OUT DUAL TOP PCBA N/C	20034-1
	154474-04-706	EA LNB DUAL EAGLE ASPEN N/C	1863-1

KEY	PART NUMBER	U/M	DESCRIPTION	163097-01-000	VENDOR NO.
	163097-01-700	EA	KEY - #2382 (ILLINOIS LOCK)		2382
	163097-01-701	EA	KEY - #2341 (MILLER DIAL)		PART SALES

163598-01-01A			
KEY	PART NUMBER	U/M	DESCRIPTION
	154474-04-706	EA	LNB DUAL EAGLE ASPEN N/C
	163598-01-700	EA	BOARD CIRCUIT N/C
	163598-01-701	EA	STUFFED PCB,CWIM DVB N/C
VENDOR NO.			
			1863-1
			1990-RF-LP KIT
			438

163598-01-02A			
KEY	PART NUMBER	U/M	DESCRIPTION
	154474-04-702	EA	DOME ONLY-REPLACEMENT-BLACK
	154474-04-706	EA	LNB DUAL EAGLE ASPEN N/C
	163598-01-700	EA	BOARD CIRCUIT N/C
	163598-01-701	EA	STUFFED PCB,CWIM DVB N/C
VENDOR NO.			
			1850-B-LP-FS
			1863-1
			1990-RF-LP KIT
			438

KEY	PART NUMBER	U/M	DESCRIPTION
	165170-01-700	EA	LENS


165170-01-01A
VENDOR NO.
81230-LENS

KEY	PART NUMBER	U/M	DESCRIPTION
1	168408-01-700	EA	REMOTE

168408-01-000
VENDOR NO.
PSVCDV2007 SVC PK

KEY	PART NUMBER	U/M	DESCRIPTION
	169154-01-700	EA	REMOTE - TV

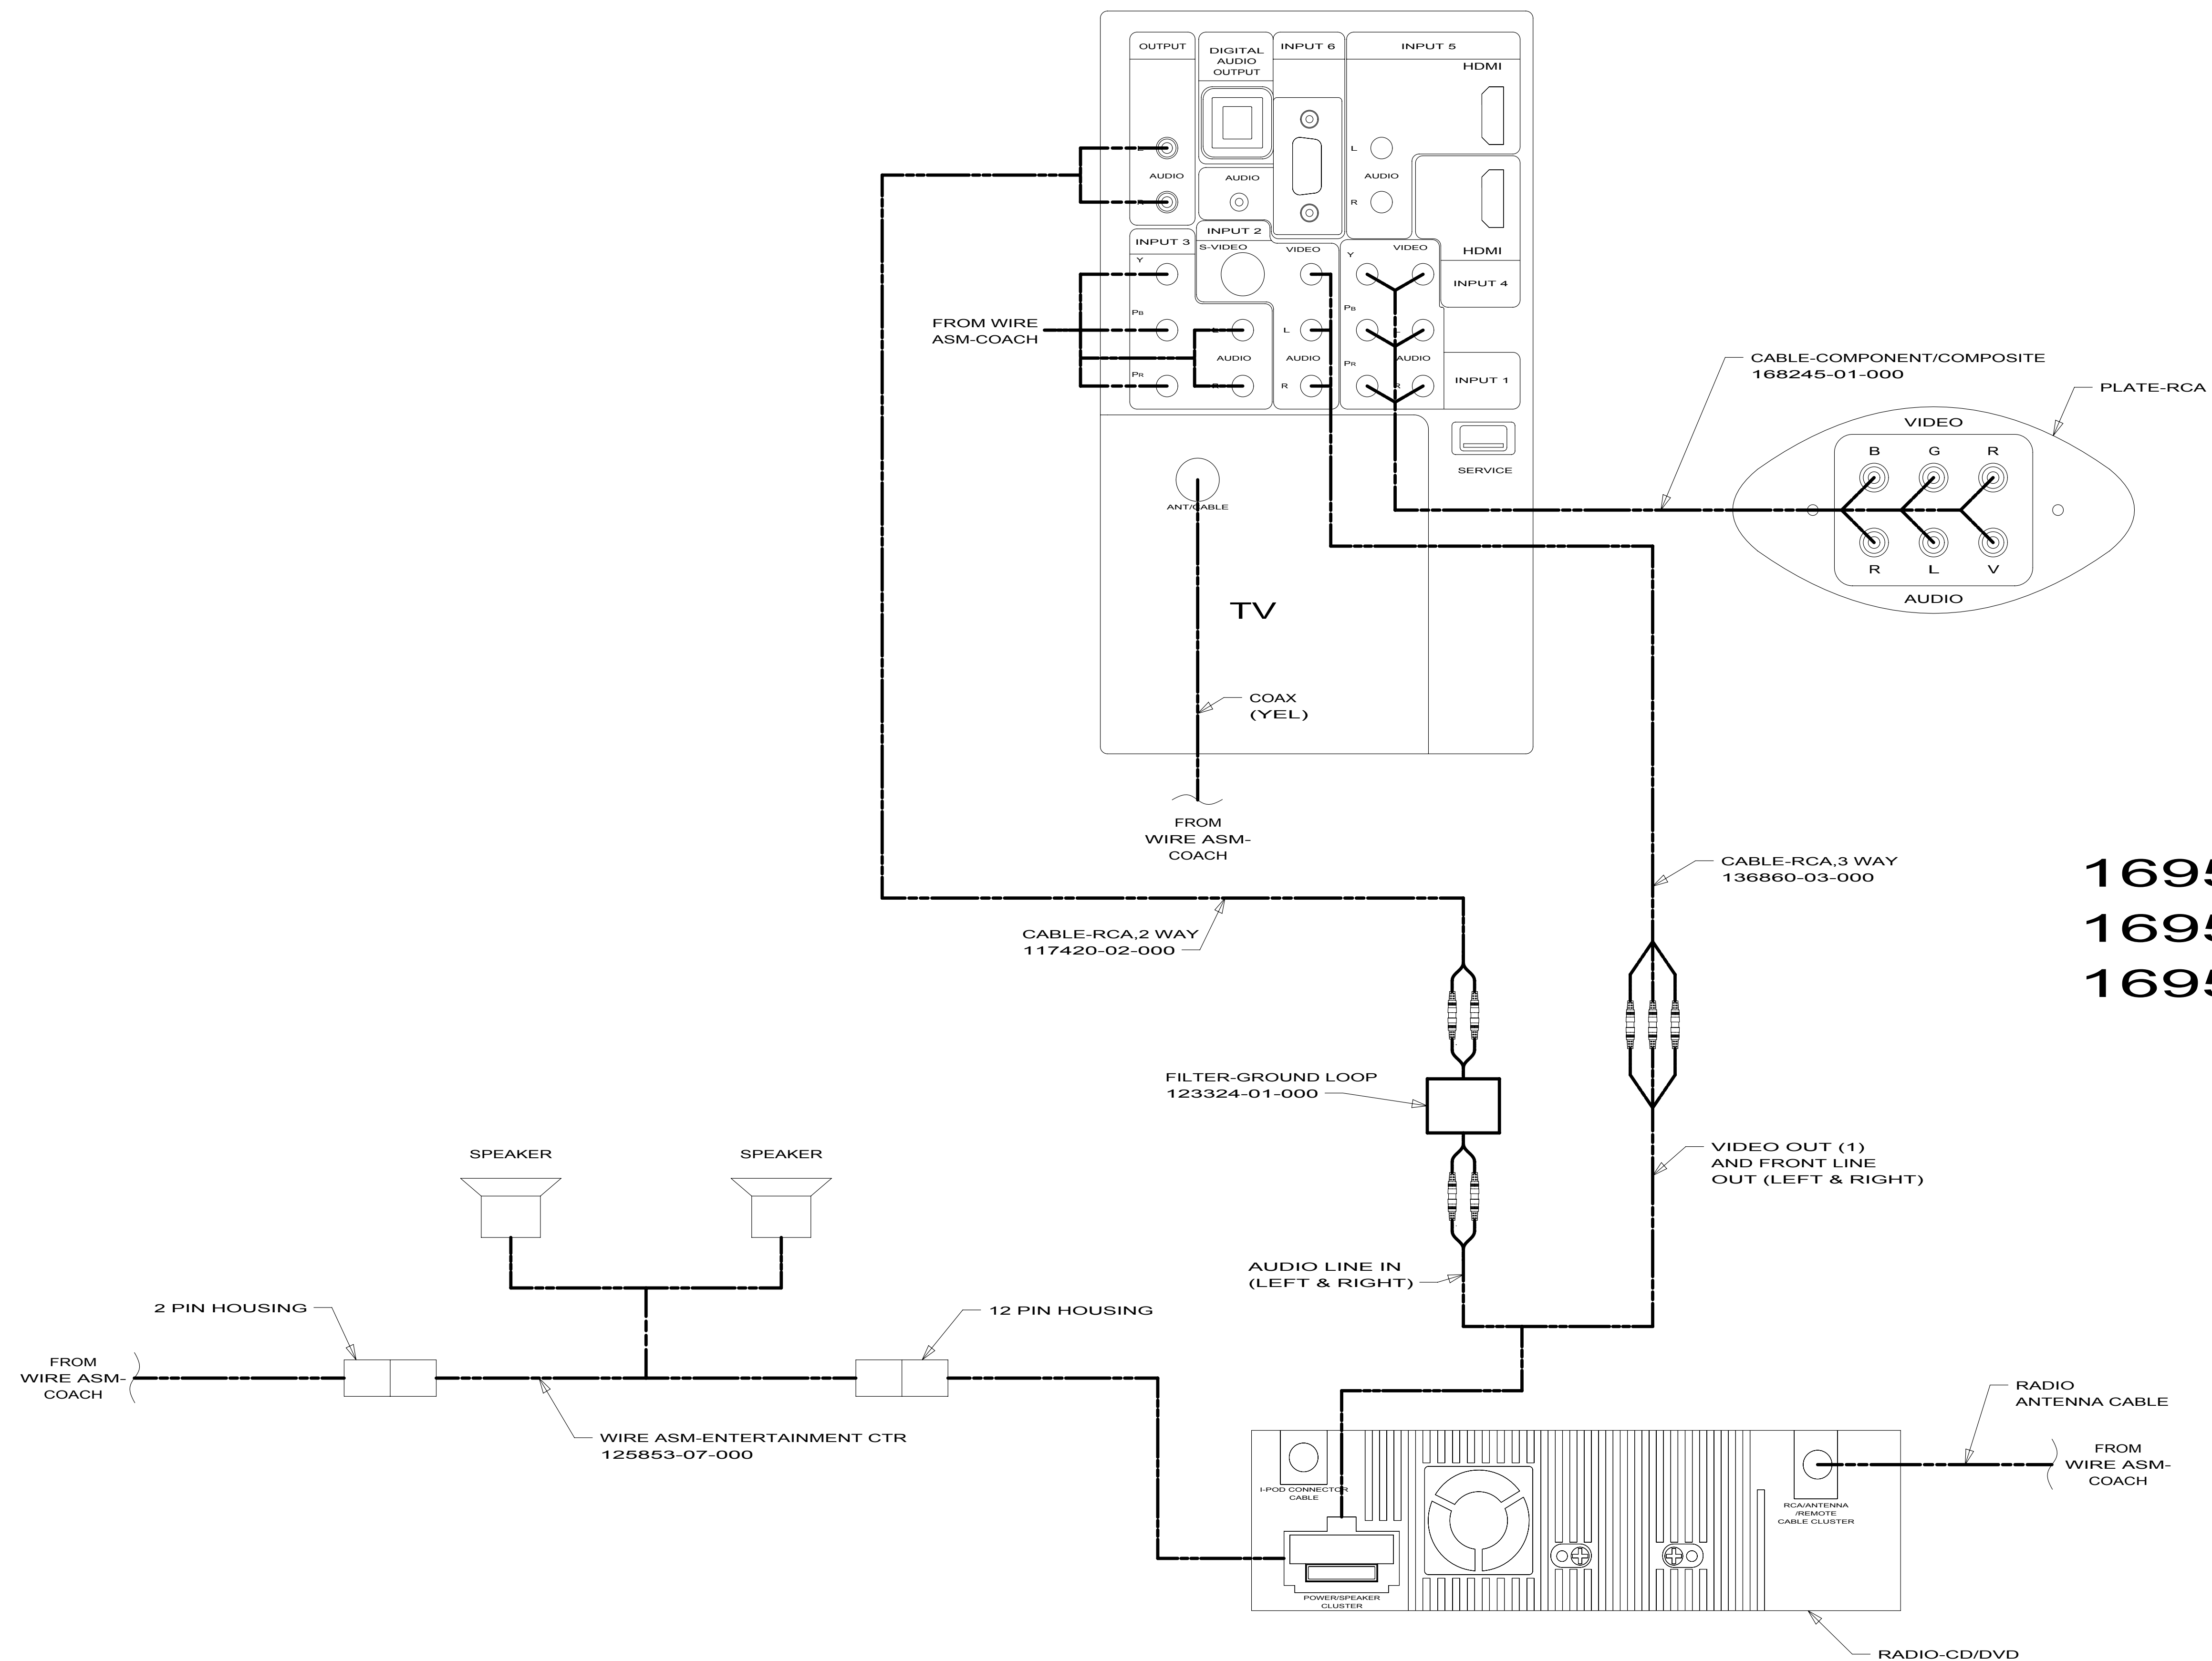169151-01-000, 169151-02-000
VENDOR NO.
RRMCGA667WJSA




169521-01-XXX
169521-02-XXX
169521-03-XXX
P-SERIES
R-SERIES

VIEW BA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

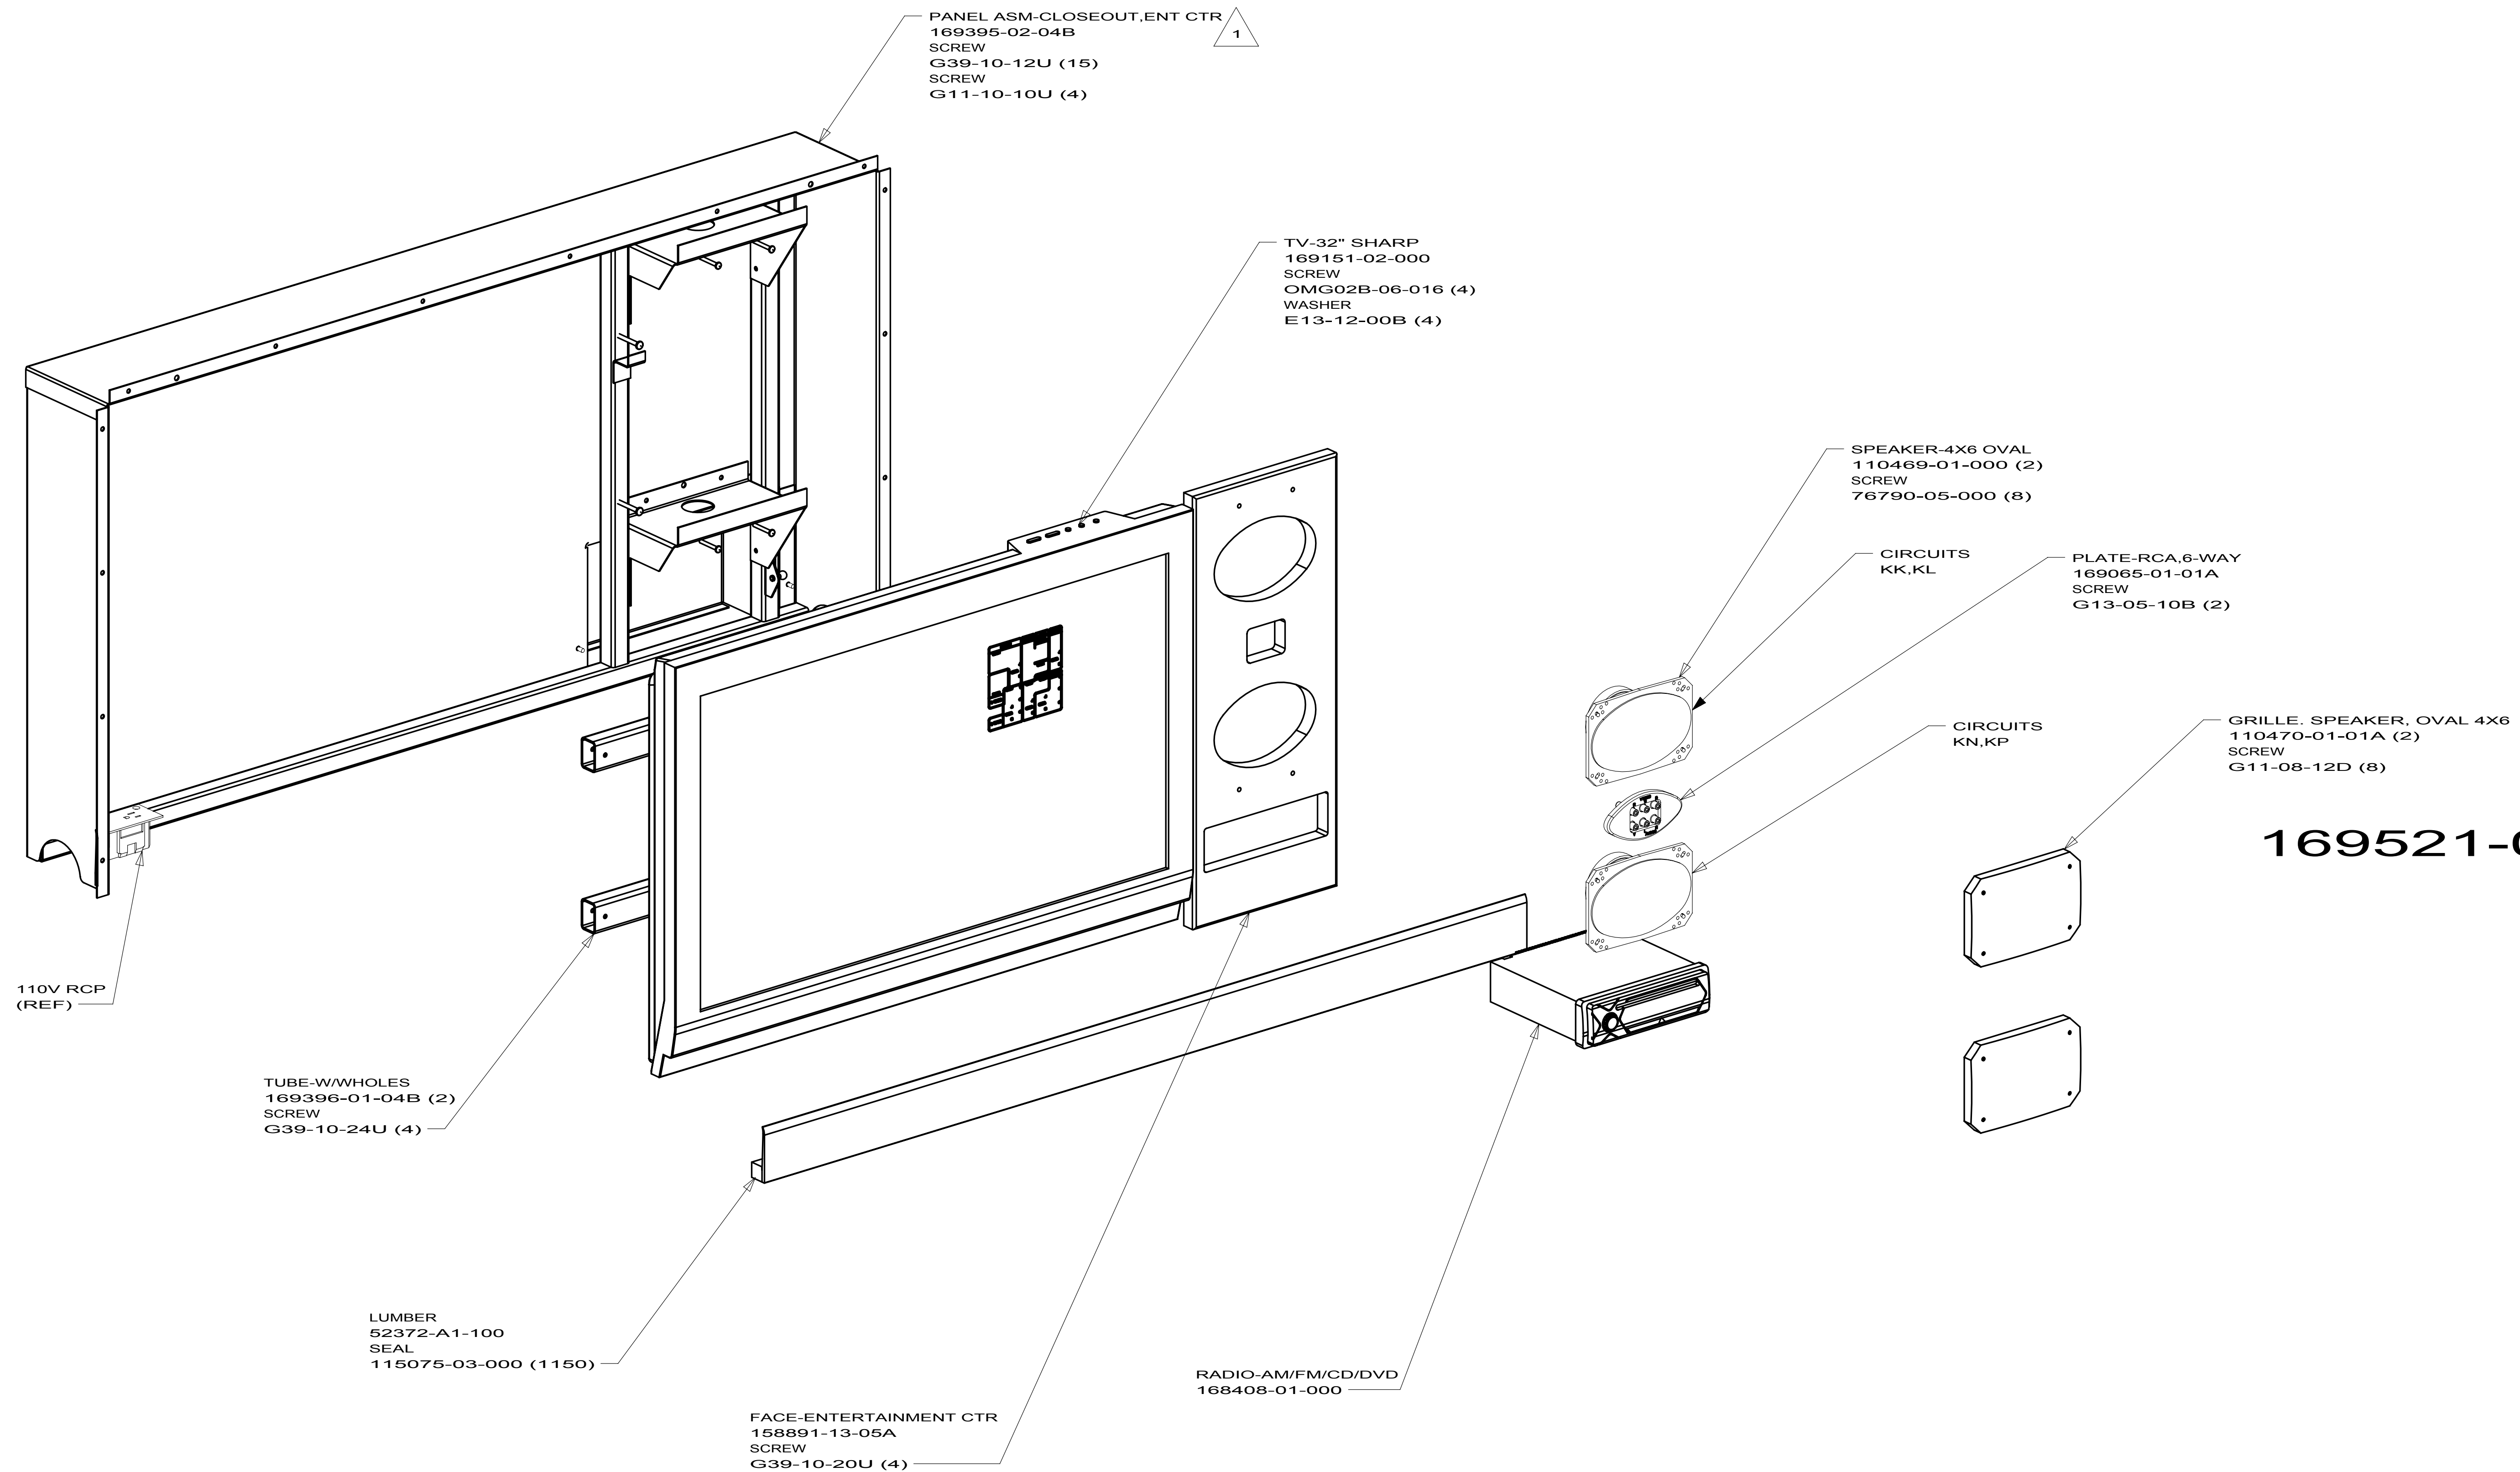169521



169521-02-XXX
P40T
R40WD

1 INSTALL ON LINE IF IN SIDEWALL, INSTALL IN 803 IF IN SLIDEOUT.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

169521

10/28/2009

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	169536-01-700	EA	REMOTE - SERVICE PACK	PSVCAWM970

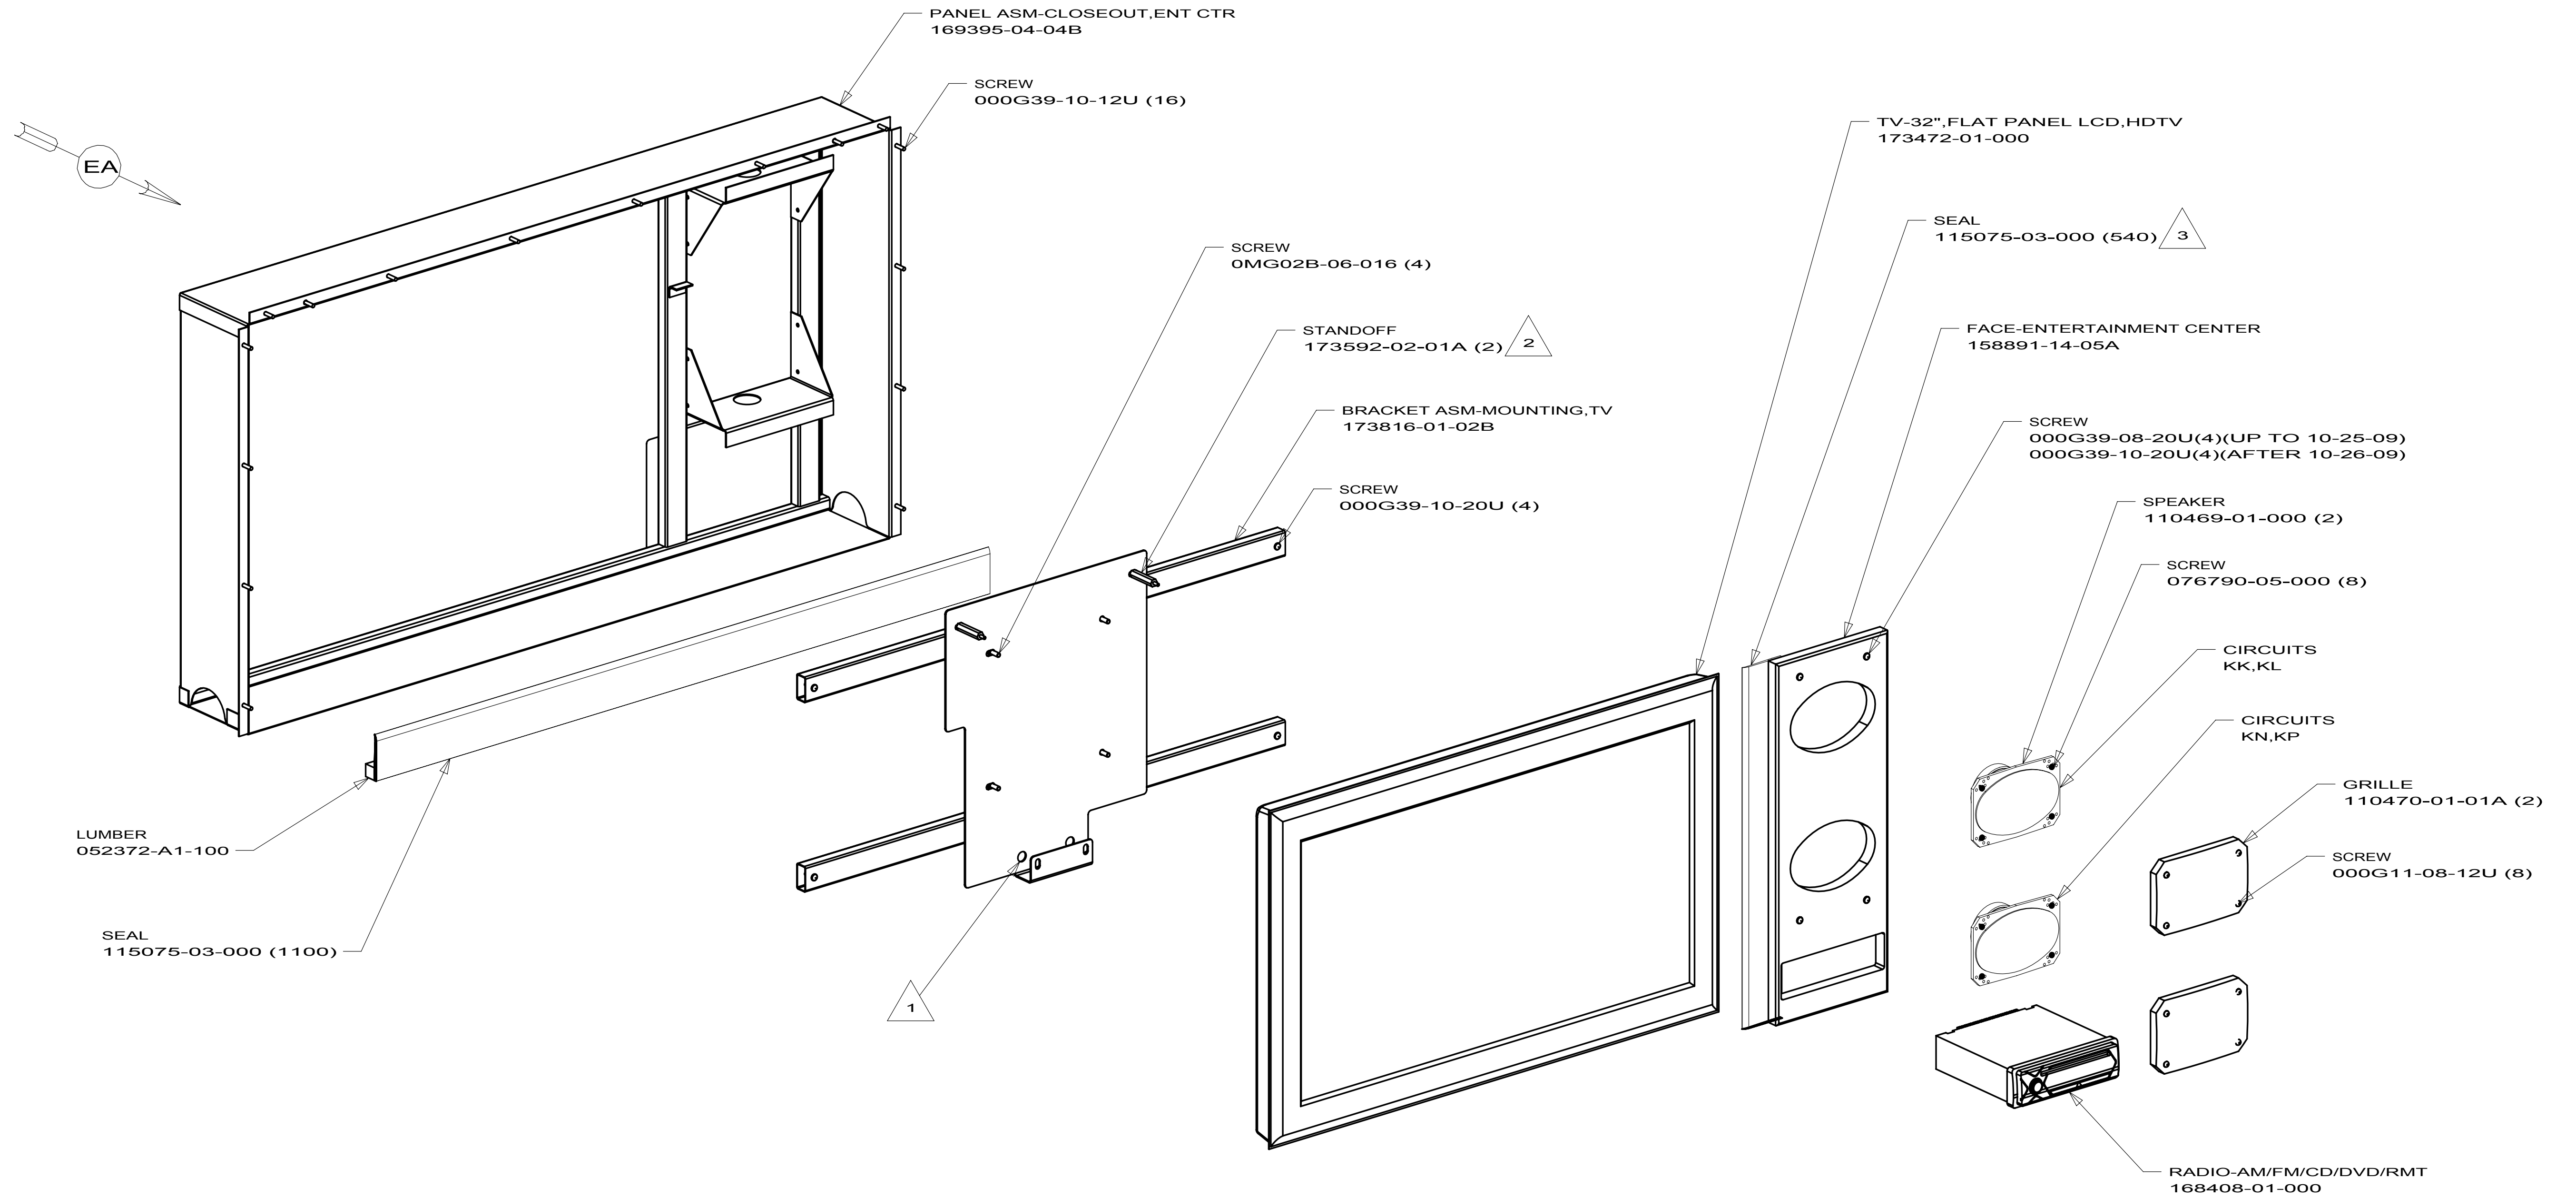

173821-02
P40T(UP TO 03-28-10)
R40CD(UP TO 03-28-10)
R40WD(UP TO 03-28-10)
R42AD(UP TO 03-28-10)


- 3 FASTEN TO BACK OF FACE-ENTERTAINMENT CENTER.
- 2 FASTEN WITH HARDWARE FROM TV CASE.
- 1 FASTEN WITH HARDWARE FROM TV STAND.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X
FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ENTERTAINMENT CTR COMPL-TV		
SHEET 2	PART NO 173821	REV

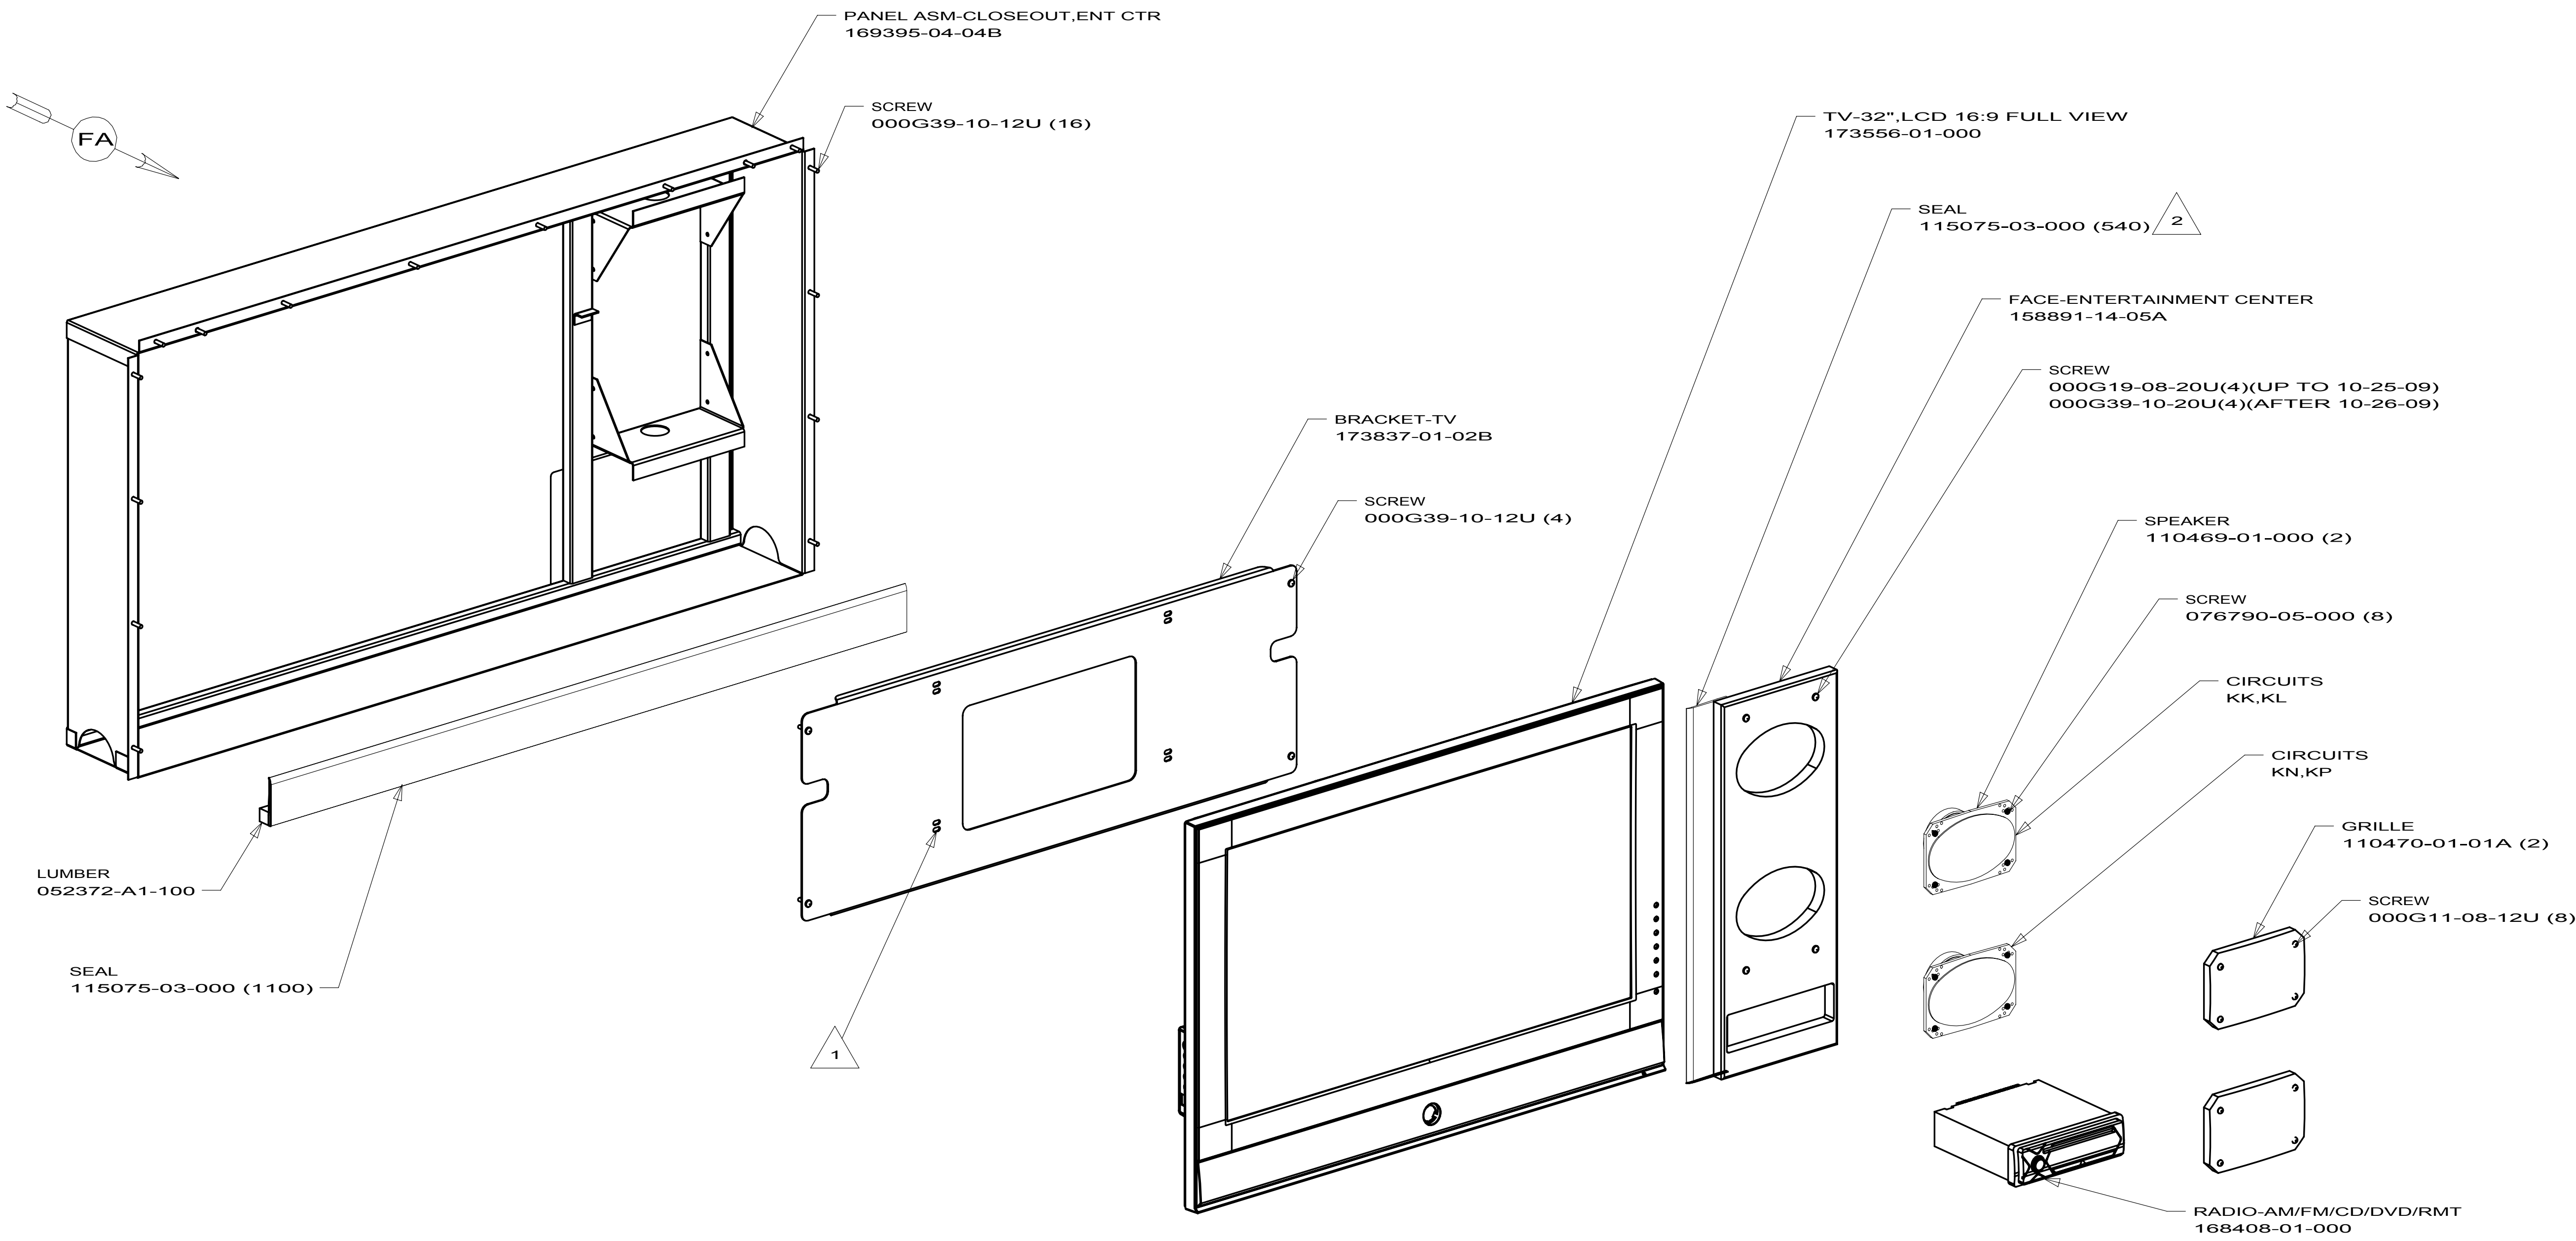

073821-04
J37F
R40CD(AFTER 03-29-10)
R40WD(AFTER 03-29-10)
R42AD(AFTER 03-29-10)
P40T(AFTER 03-29-10)

- 2 FASTEN TO BACK OF FACE-ENTERTAINMENT CENTER.
- 1 SCREWS SUPPLIED WITH TV. USE LOWER SET OF HOLES.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X
FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ENTERTAINMENT CTR COMPL-TV		
SHEET 4	PART NO 173821	REV

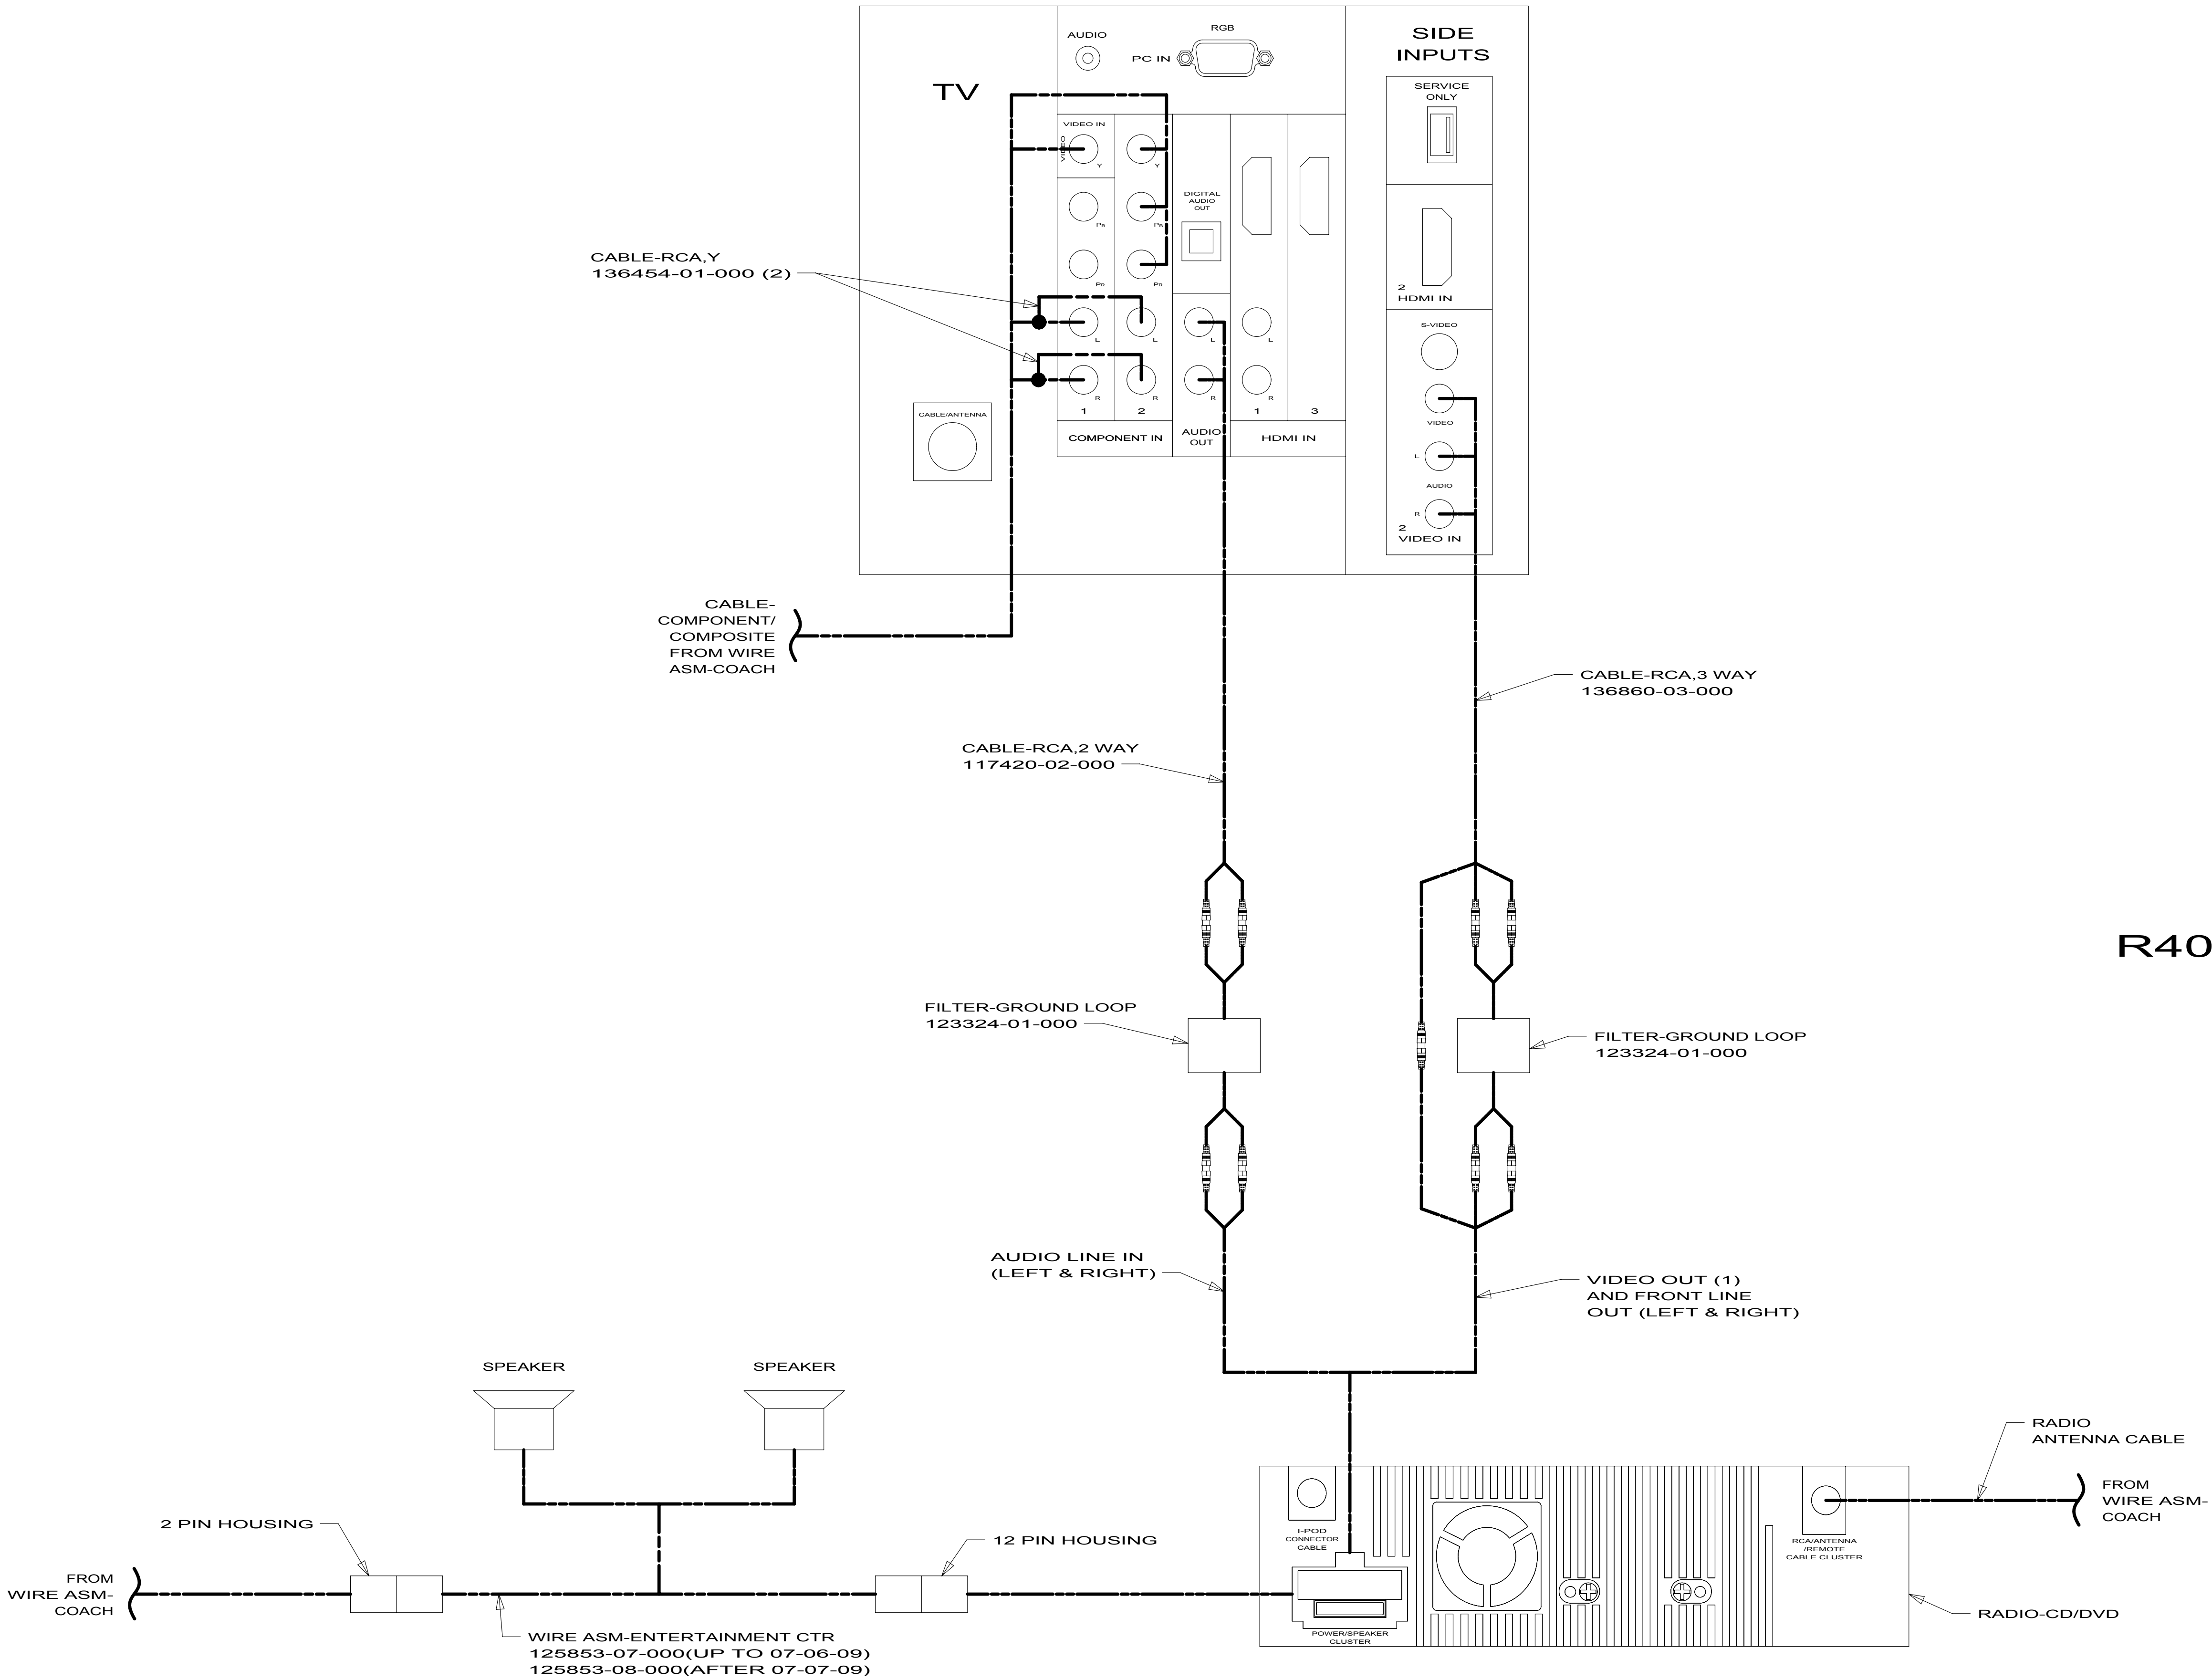173821-01
P40L
173821-02
P40T
R40CD, R40WD, R42AD
173821-03
R40BD







DETAIL EA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
123324-01-000

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
ENTERTAINMENT CTR COMP		
SHEET 5	PART NO 173821	REV

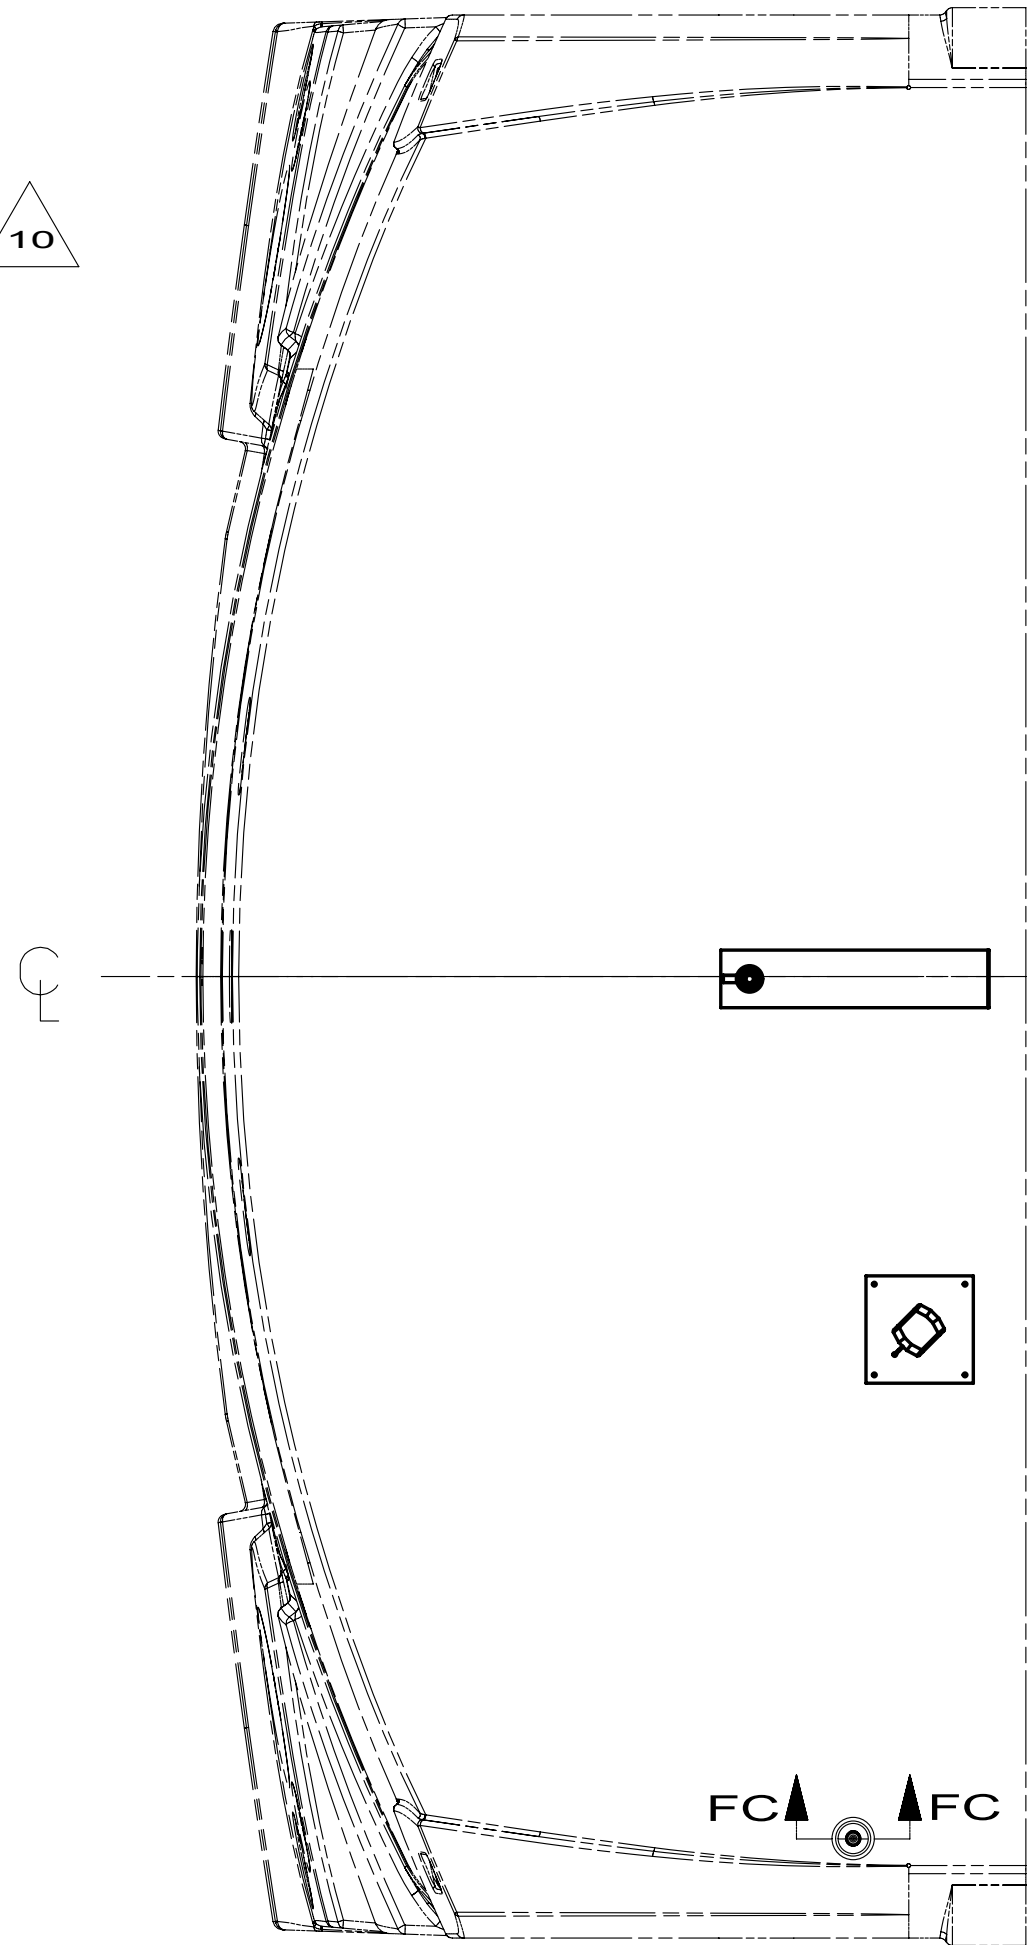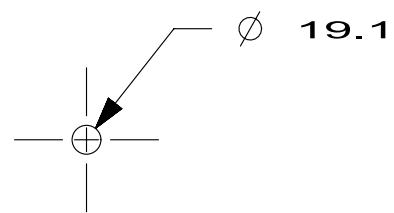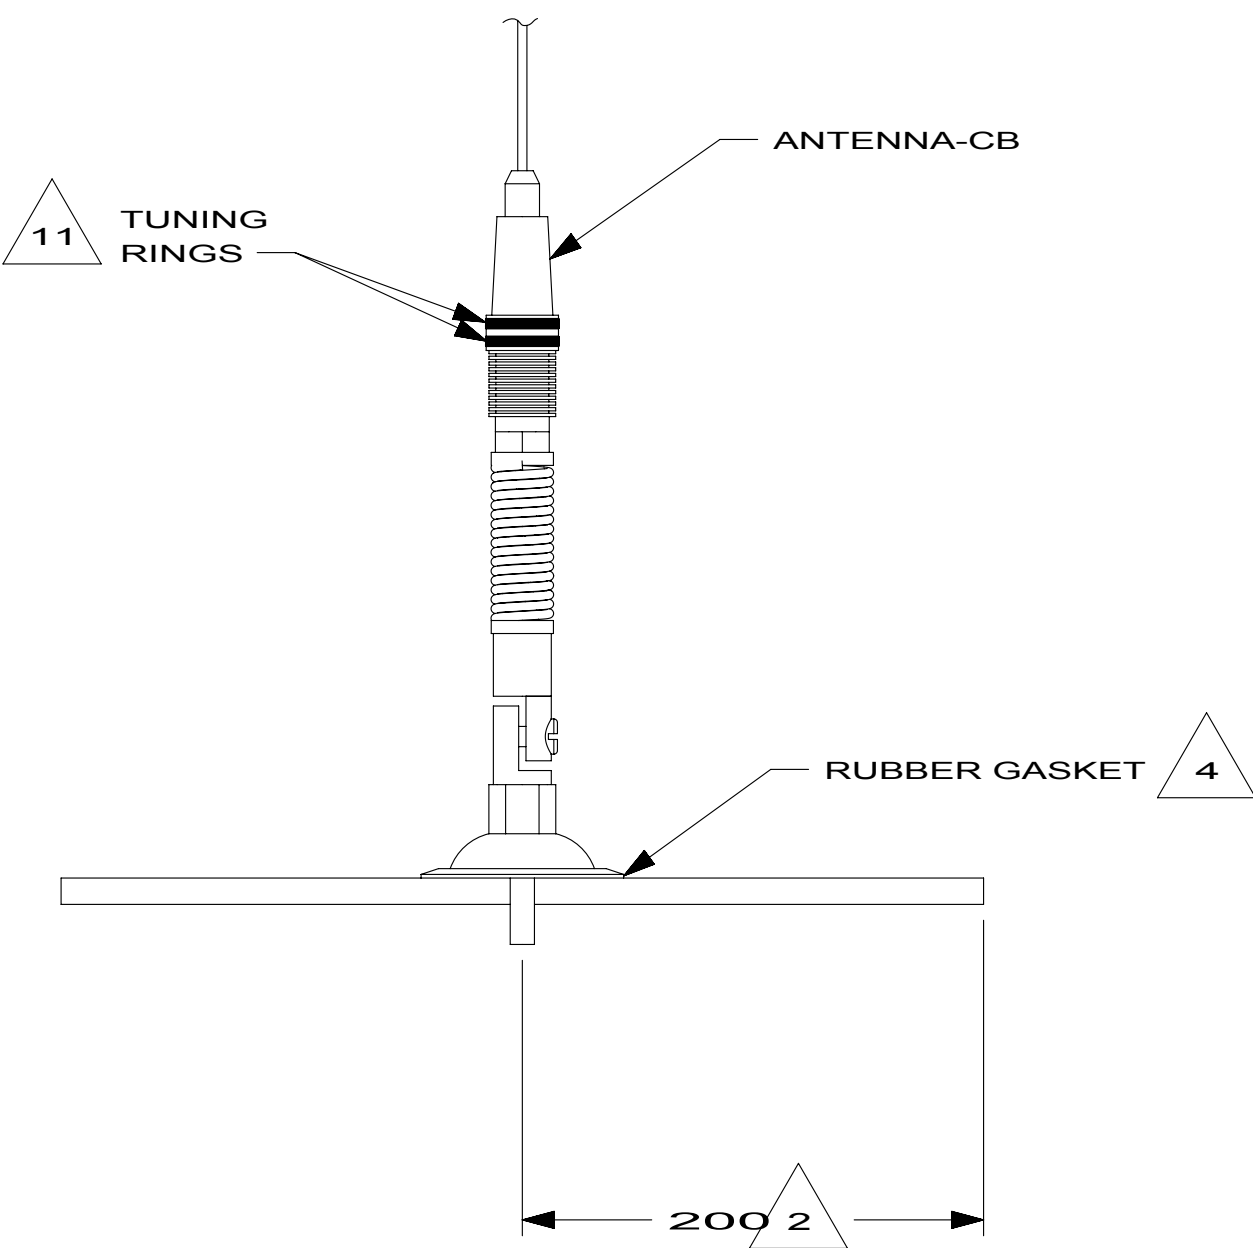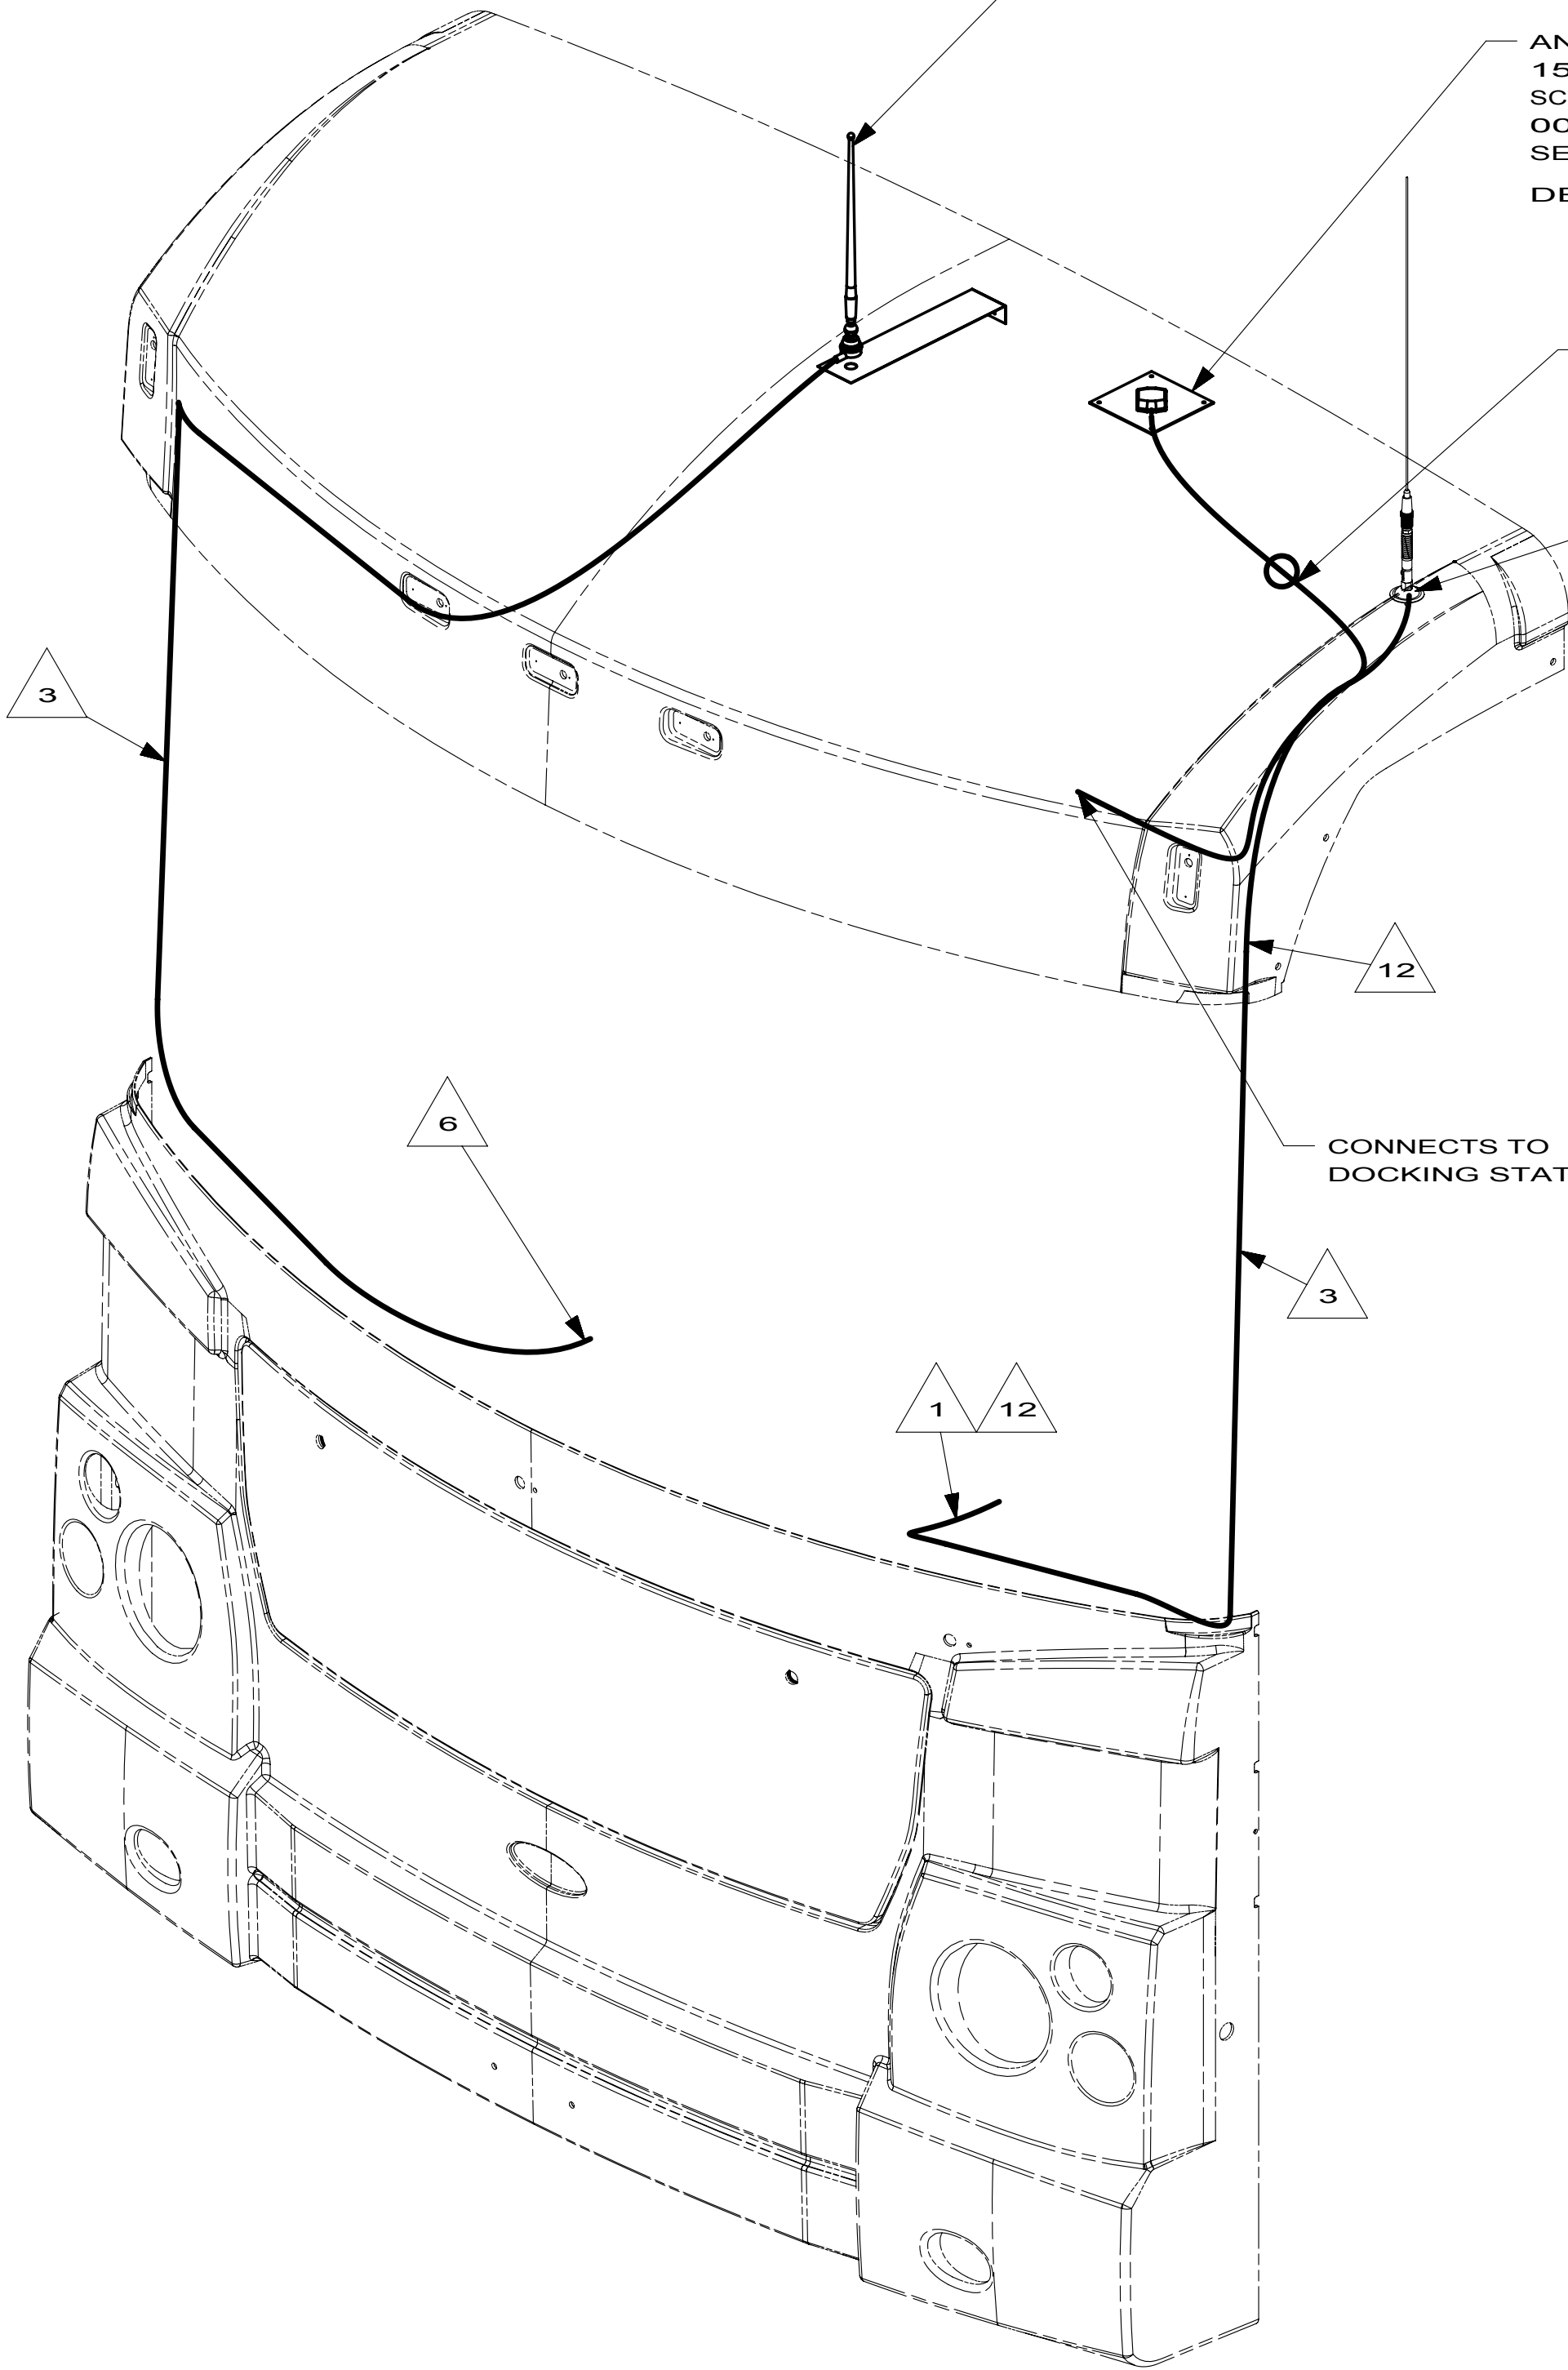P-Series
R-Series
169848-06



- NOTES:
- 12 PROVIDE A 1000 MM DROP OF CB ANTENNA CABLE FROM THE TOP OF THE A-PILLAR TO CONNECT TO THE ANTENNA AND PLACE THE EXCESS CABLE IN THE CB PREP BAG LOCATED UNDER THE DASH.
 - 11 TUNING RINGS ARE TO BE BOTH ADJUSTED TO THE TOP OF THEIR TRAVEL AND TIGHTENED AGAINST EACH OTHER.
 - 10 TIGHTEN JOINTS BETWEEN ANTENNA BASE AND ANTENNA PIVOT AND ALSO THE MAST AND ANTENNA PLATE.
 - 9 MOUNT ANTENNA SUCH THAT BASE IS SQUARE W/REAR OF ROOF CAP & HOLE IS DIRECTLY OVER HOLE IN FIBERGLASS. SEAL HOLE IN ROOF CAP, BASE AT SCREWS.
 - 8 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
 - 7 USE HOLE IN BRACKET AS GUIDE TO DRILL 13 DIAMETER HOLE IN FIBERGLASS.
 - 6 TO RADIO.
 - 5 ATTACH ANTENNA-CB GROUND WIRE TO CAB FRAME, USE SCREW 000G39-08-08B.
 - 4 SEAL AROUND ANTENNA BASE.
 - 3 ROUTE CABLE ALONG A-POST, UNDER TRIM COVER.
 - 2 MEASURED FROM REAR EDGE OF FIBERGLASS CAP.
 - 1 SEE WIRING INSTL-FRONT END FOR LOCATION OF COAX END AND LABEL.

- 14 USED ON P&R SERIES.
- 13 USED ON M-SERIES.

- ANTENNA-RADIO
090944-02-000
CABLE ASM-ANTENNA
090944-03-000
BRACKET-ANTENNA
140600-06-01B
140600-08-02B
SCREW
000G39-08-08B (2)

- ANTENNA-SATELLITE RADIO
158494-01-000
SCREW
000G11-08-08U (4)
SEAL
DETAIL FA

- CONNECT TO CABLE-
ANTENNA SATELLITE

- ANTENNA-CB
123256-01-000
CABLE-CB COAX
123256-02-000


- CONNECTS TO
DOCKING STATION

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



- 70C RADIO - SATELLITE
- 40C RADIO - CB
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ANTENNA INSTL-RADIO AND CB		
SHEET 6	PART NO 169848	REV

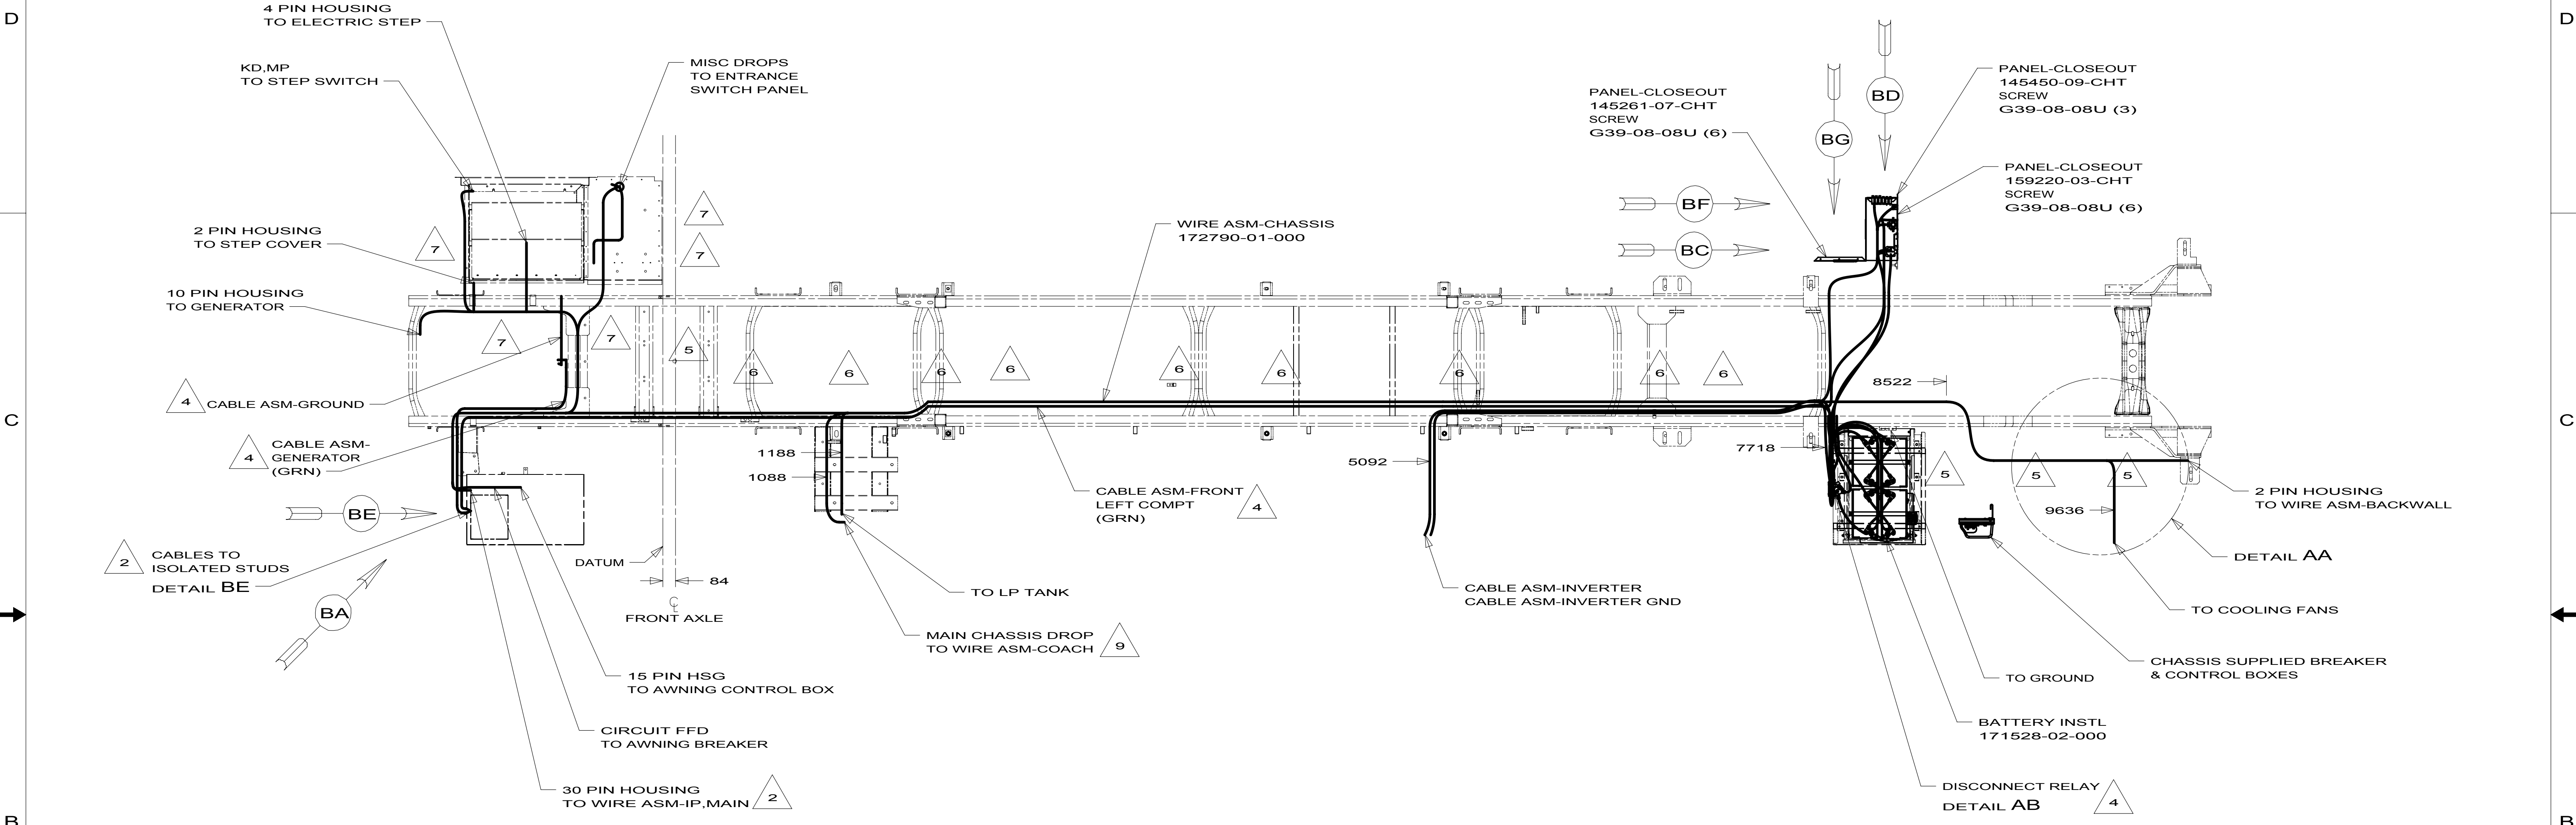

- 9 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION.
- 8 ROUTE TO REAR OF COACH TO BE ROUTED THRU MAIN FLOOR.
- 7 CLAMP 10497-03-000, SCREW G39-08-12B
- 6 CLAMP 83610-01-000, SCREW G39-08-12B
- 5 USE TIE-WIRE 8343-04-000 TO SECURE WIRES TO FLOOR SUPPORT FRAME AT LEAST ONCE EVERY 600MM.
- 4 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 3 SECURE CORD AWAY FROM ALL MOVING PARTS AND EXHAUST WITH TIE-WIRE 93147-01-000 AS REQUIRED.
- 2 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.

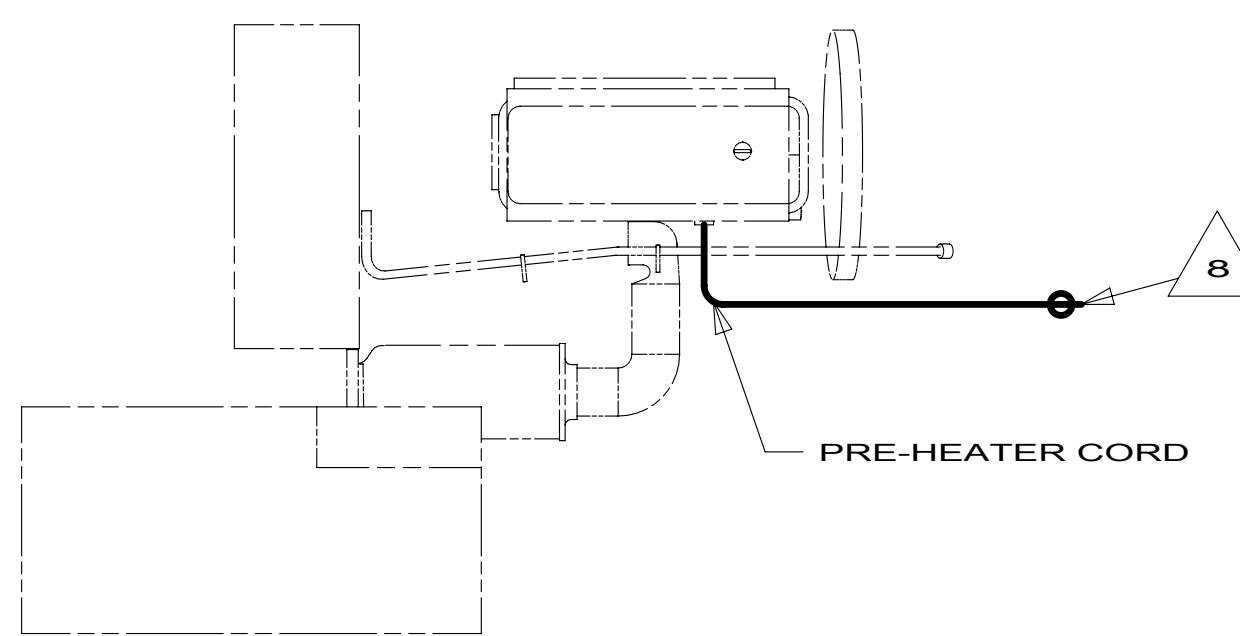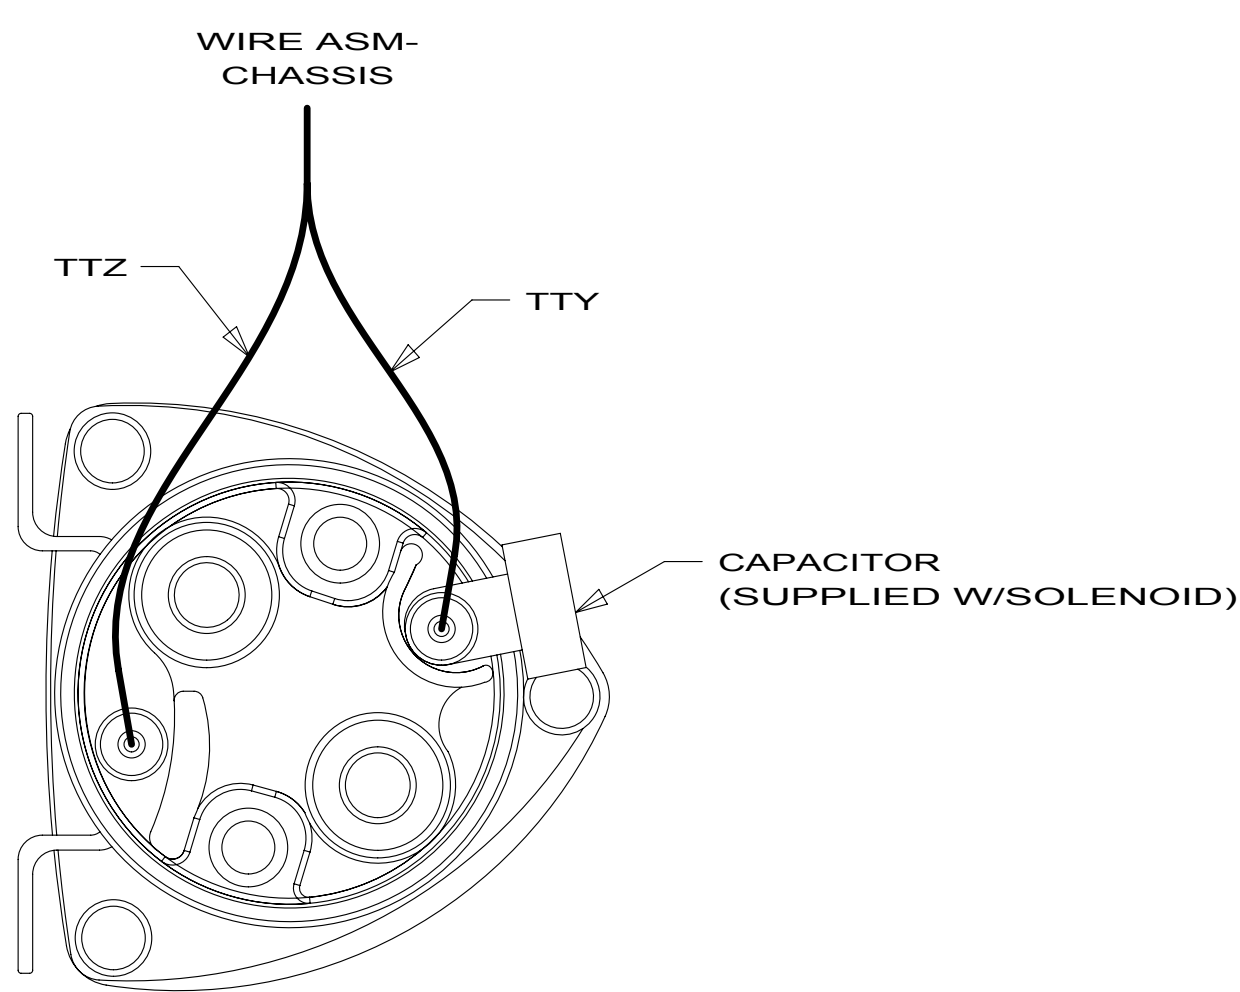1. LEGEND: — WINNEBAGO; - - - CABLE; - - - CHASSIS SUPPLIED WIRING.



DETAIL AA 3

- 1FC FREIGHTLINER CHASSIS-24,850#
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS-USA

1B1

265

1FC

WINNEBAGO INDUSTRIES

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHKD	
P.E.	ALL DIMENSIONS ARE IN MILLIMETERS
M.E.	FIRST USED
DSNR	10 P40T

UNSPECIFIED TOLERANCES ARE:

WHOLE DIM (X) ± 3

ONE-PLACE (X.X) ± 1.5

TWO-PLACE (X.XX) ± 0.50

ANGLE ± 1°

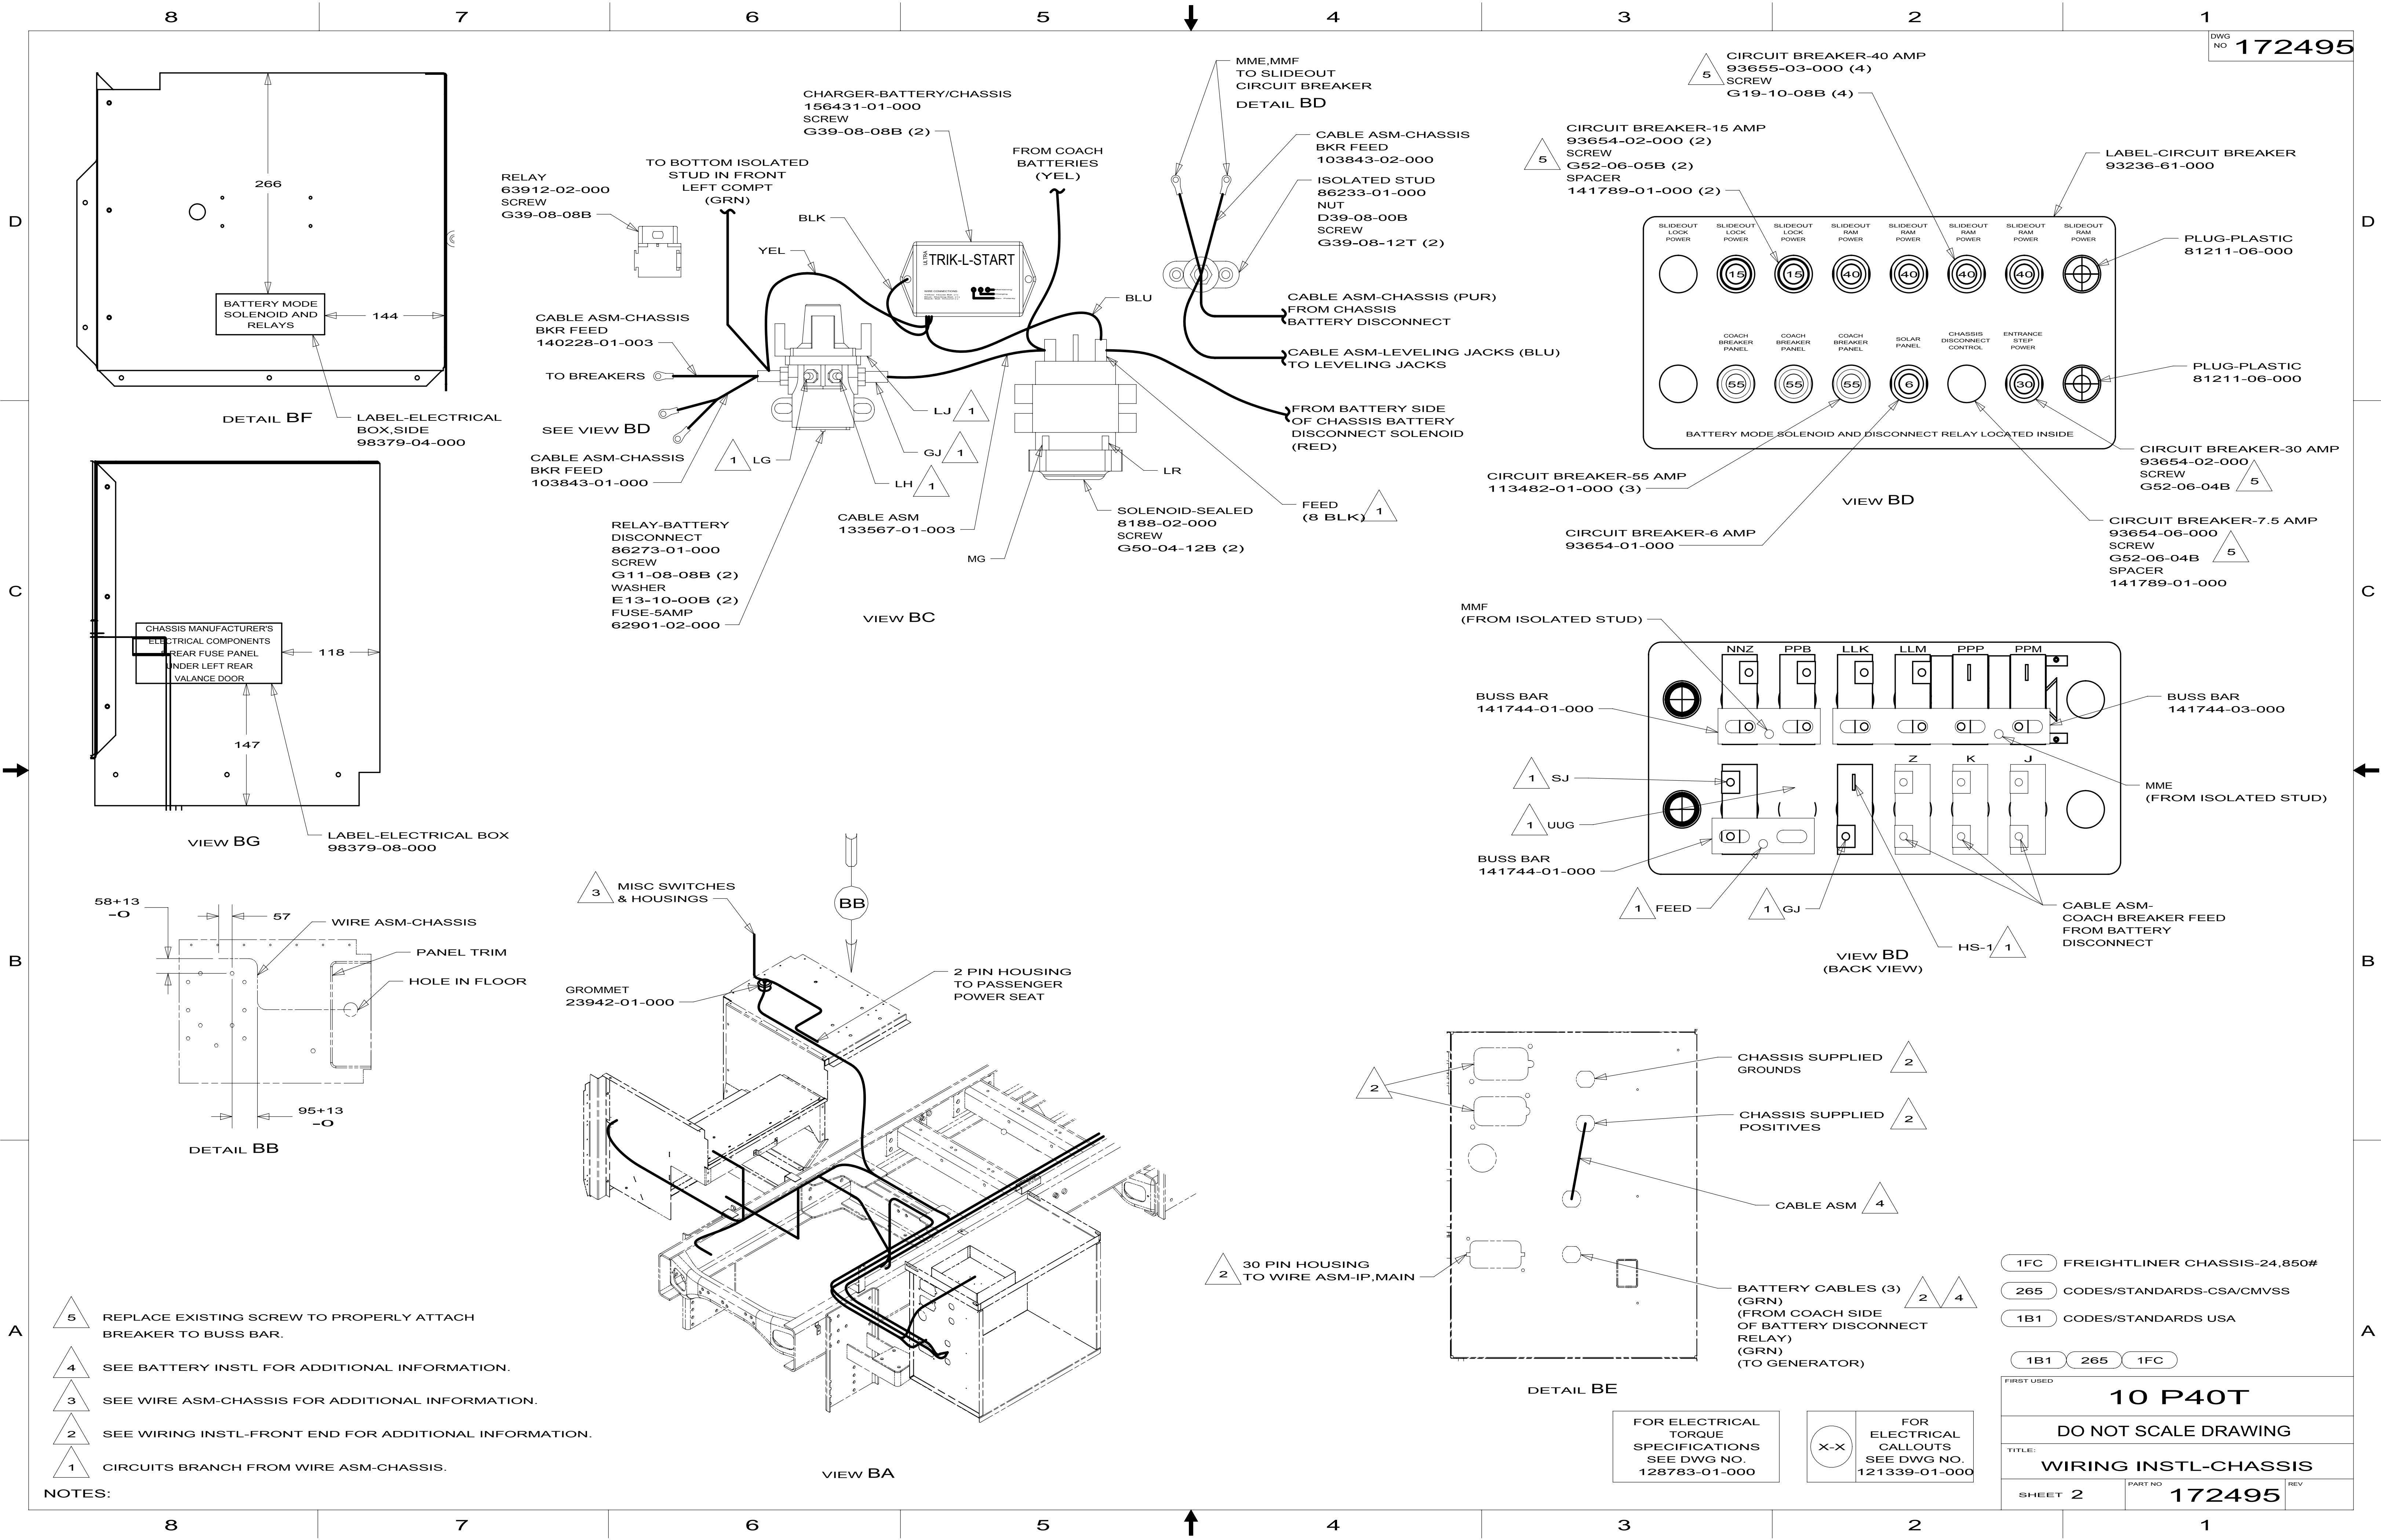
MATERIAL:

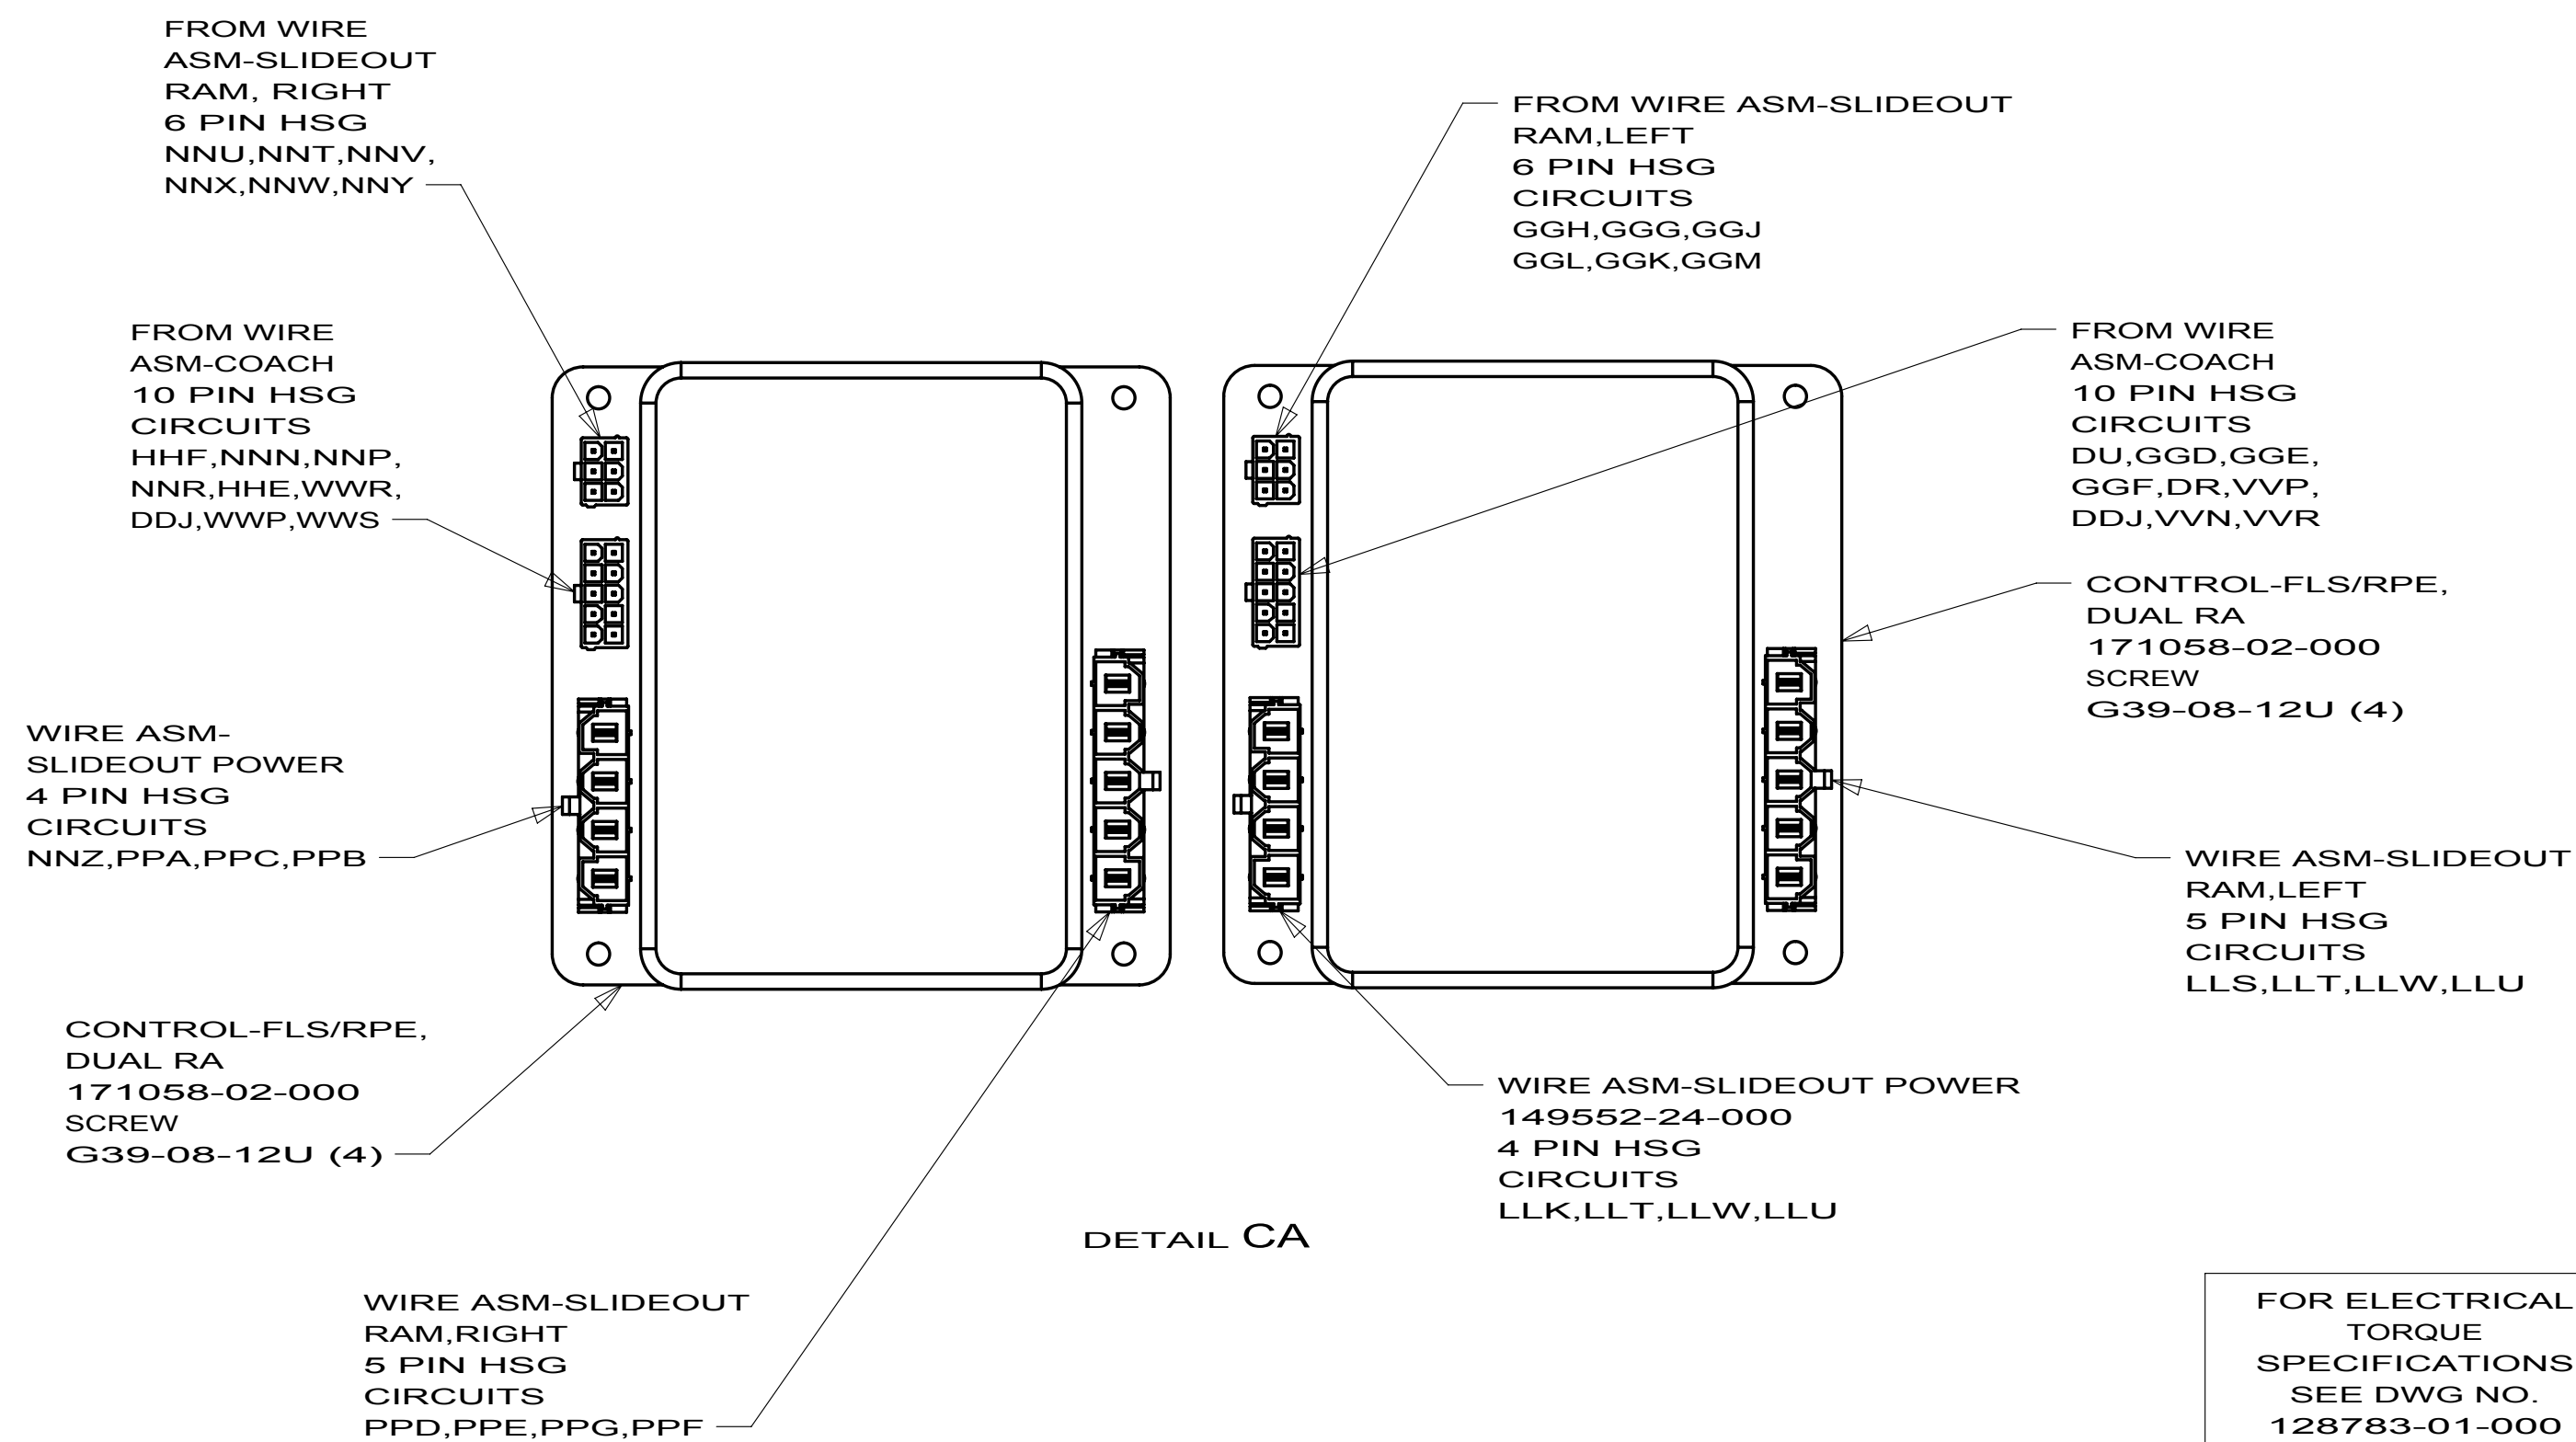
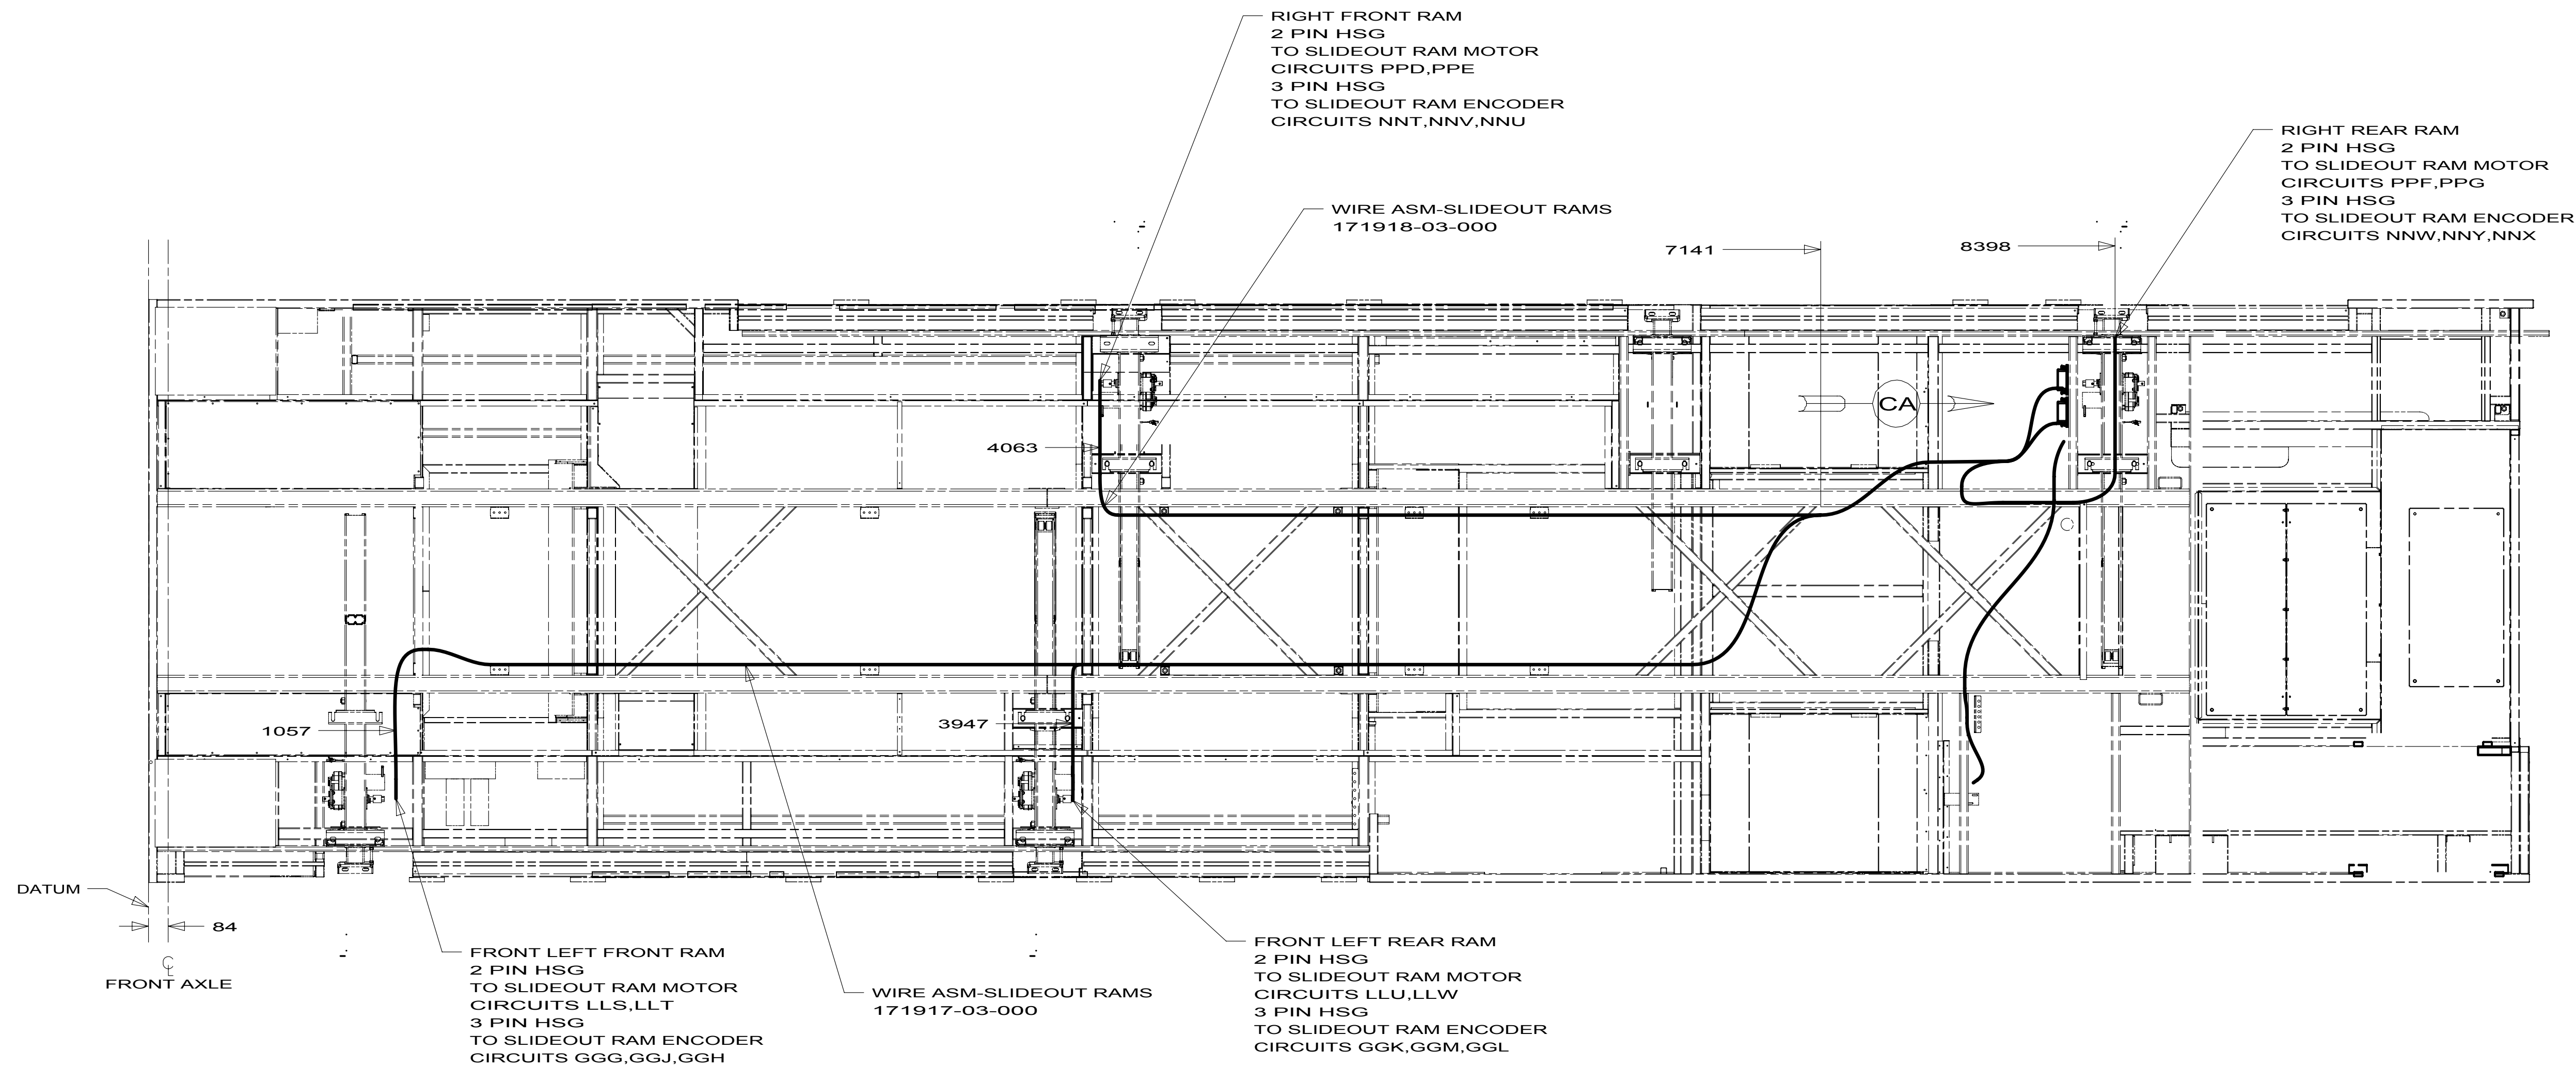
THIRD ANGLE PROJECTION

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000





1. ALL WIRES TO BE CLAMPED WITH 10495-01-000 OR WIRE TIE 8343-02-000 EVERY 600MM, UNLESS OTHERWISE SPECIFIED.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1FC FREIGHTLINER CHASSIS-24,850#
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265 1FC

FIRST USED		
10 P40T		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-CHASSIS		
SHEET 3	PART NO 172495	REV

8		7		6		5		↓		4		3		2		1	
DRAWING NO.		SHEETS															
171528-01		1,2,3		P40L													
171528-02		1,4,5		P40T													
171528-03		1,6		P39N													
171528-04		1,7		P34Y													
P40LP40TP39NP34Y																	
				P40L	P40T	P39N	P34Y										
CABLE ASM-COACH BATTERY (YEL)				141417-52-038	141417-52-037	141417-52-008	141417-52-046										
CABLE ASM-COACH BATTERY GND (BLK)				133568-11-023	133568-11-020	133568-12-012	133568-11-008										
CABLE ASM-CHASSIS BATTERY (PUR)				141416-15-021	141416-15-025	141416-15-012	141416-15-039										
CABLE ASM-BATTERY MODE SOLENOID (RED)				141417-35-023	141417-35-025	141417-35-015	141417-35-039										
CABLE ASM-GENERATOR (GRN)				141416-42-025	141416-42-025	141416-42-025	141416-42-025										
CABLE ASM-GENERATOR (GND)				133566-12-013	133566-12-013	133566-12-013	133566-12-013										
CABLE ASM-FRONT LEFT COMPT PASS THRU STUD (GRN)				141416-42-125	141416-42-130	141416-42-120	141416-42-105										
CABLE ASM-INVERTER FUSE				141416-62-017	141416-62-014	141417-01-003	141417-01-006										
CABLE ASM-INVERTER (ORG)				141416-61-028	141416-61-045	141415-62-065	141415-62-045										
CABLE ASM-INVERTER GND (BLK)				133567-14-036	133567-14-057	133566-12-055	133566-12-025										
LEVELING SYSTEM POWER CABLE (BLU)				141416-22-116	141416-22-116	141416-22-105	141416-22-095										
LEVELING SYSTEM GND CABLE (BLK)				133566-11-005	133566-11-005	133566-11-005	133566-11-005										
CABLE ASM-TEMPERATURE,BATTERY				172438-04-000	172438-04-000	-----	-----										
CABLE ASM-RED JUMPER BETWEEN POSITIVE POSTS IN LEFT FRONT COMPT				133568-01-002	133568-01-002	133568-01-002	133568-01-002										
CABLE ASM-JUMPER, NEG #1				133568-11-003	133568-11-003	133568-11-003	133568-11-003										
CABLE ASM-JUMPER, NEG #2				133568-11-003	133568-11-003	-----	-----										
CABLE ASM-JUMPER, POS #1				133568-01-003	133568-01-003	133568-01-003	133568-01-003										
CABLE ASM-JUMPER, POS #2				133568-01-003	133568-01-003	-----	-----										
CABLE ASM-JUMPER, POS #3				133568-01-002	133568-01-002	-----	-----										
CABLE ASM-JUMPER, NEG #3				133568-11-002	133568-11-002	-----	-----										
CABLE ASM-JUMPER,CHASSIS POSITIVE				133568-02-008	-----	-----	141417-35-006										
CABLE ASM-CONVERTER,POS				-----	-----	156203-03-065	156203-03-045										
CABLE ASM-CONVERTER,NEG				-----	-----	156203-04-055	156203-04-025										
CABLE ASM-FUSE,JUMPER				-----	-----	141415-01-002	141415-01-002										
2 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION. 1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION. NOTES:																	
8		7		6		5		↑		4		3		2		1	

RELEASE

REV A

DATE

DWG NO 171528

REV ZONE

REVISION RECORD

DATE

DFTD.ORG

1AF

FRTL 32,350 360HP 8.3L 6-SPD

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

1AF

WINNEBAGO INDUSTRIES

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.

DFTD

CHKR

P.E.

M.E.

DSNR

ORIG. DATE

ALL DIMENSIONS ARE IN MILLIMETERS

FIRST USED

10 P-SERIES

UNSPECIFIED TOLERANCES ARE:
WHOLE DIM (X) ± 3
ONE-PLACE (X.X) ± 1.5
TWO-PLACE (X.XX) ± 0.50
ANGLE ± 1°
THIRD ANGLE PROJECTION

MATERIAL:

DO NOT SCALE DRAWING

TITLE: BATTERY INSTL

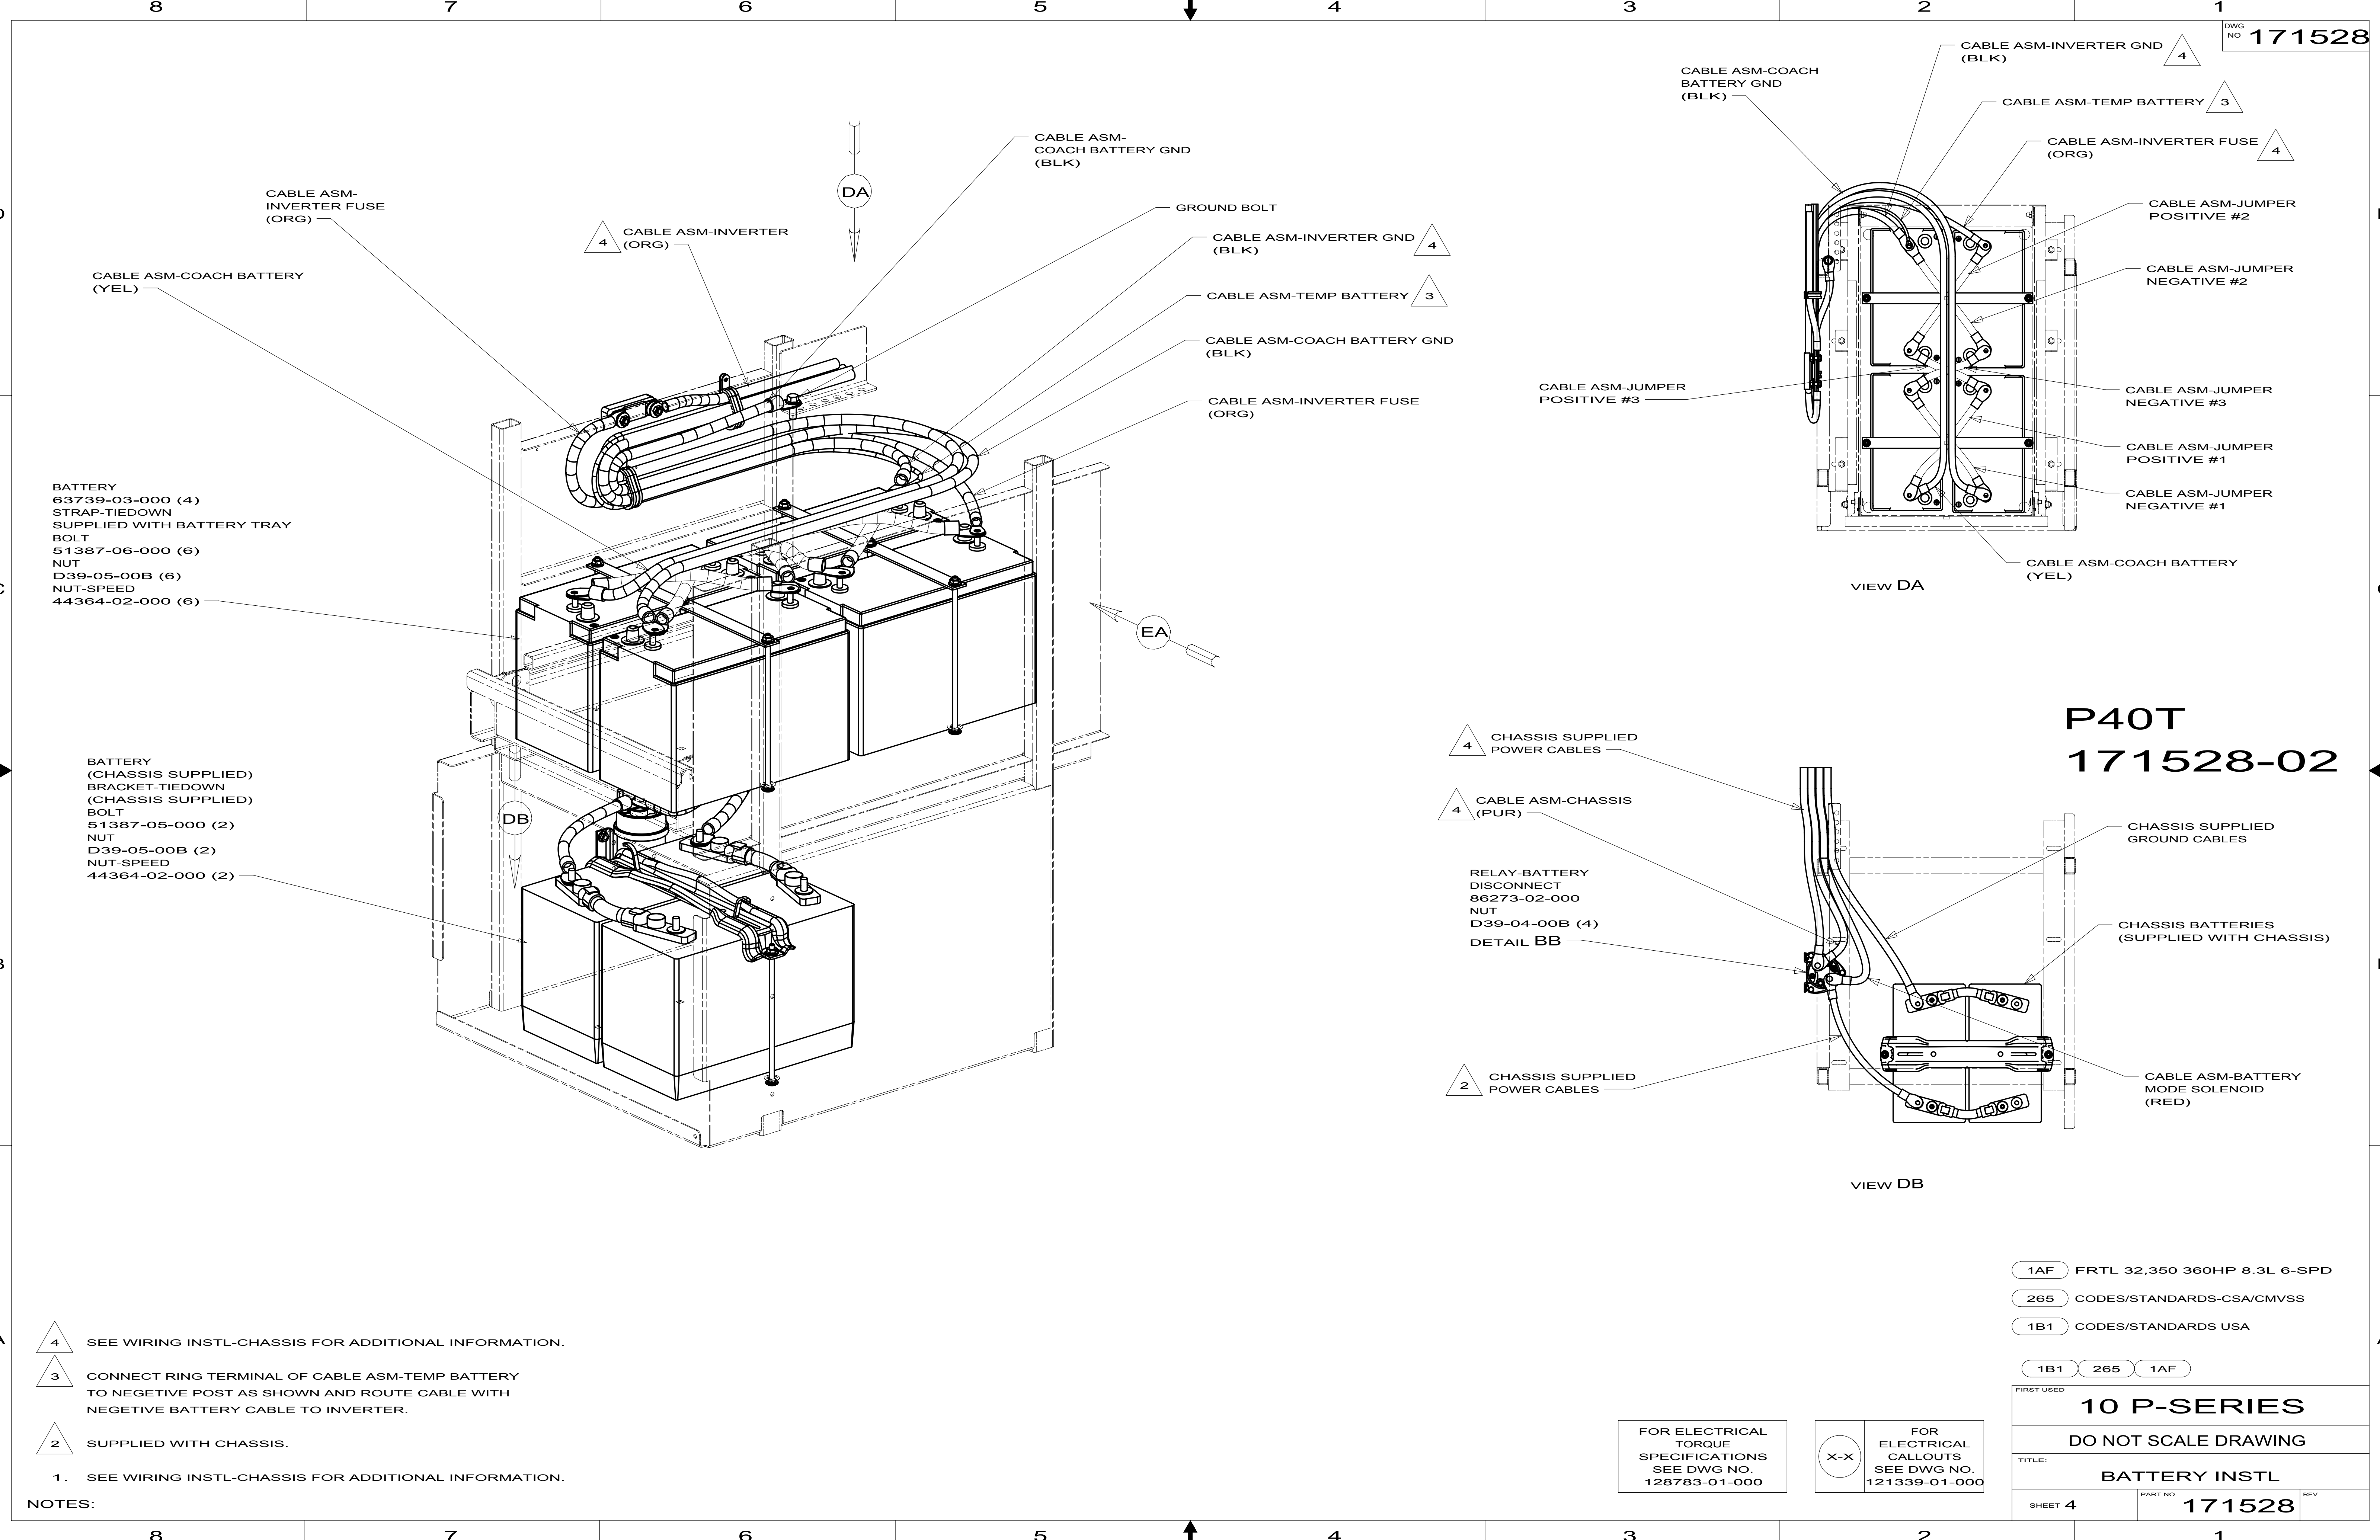
SHEET 1 OF 7PART NO 171528REF: 1

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

11/24/2009



- 4

SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 3

CONNECT RING TERMINAL OF CABLE ASM-TEMP BATTERY TO NEGETIVE POST AS SHOWN AND ROUTE CABLE WITH NEGATIVE BATTERY CABLE TO INVERTER.
- 2

SUPPLIED WITH CHASSIS.
1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

1AF

FRTL 32,350 360HP 8.3L 6-SPD

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

1AF

FIRST USED

10 P-SERIES

DO NOT SCALE DRAWING

TITLE:

BATTERY INSTL

SHEET 4

PART NO

171528

REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

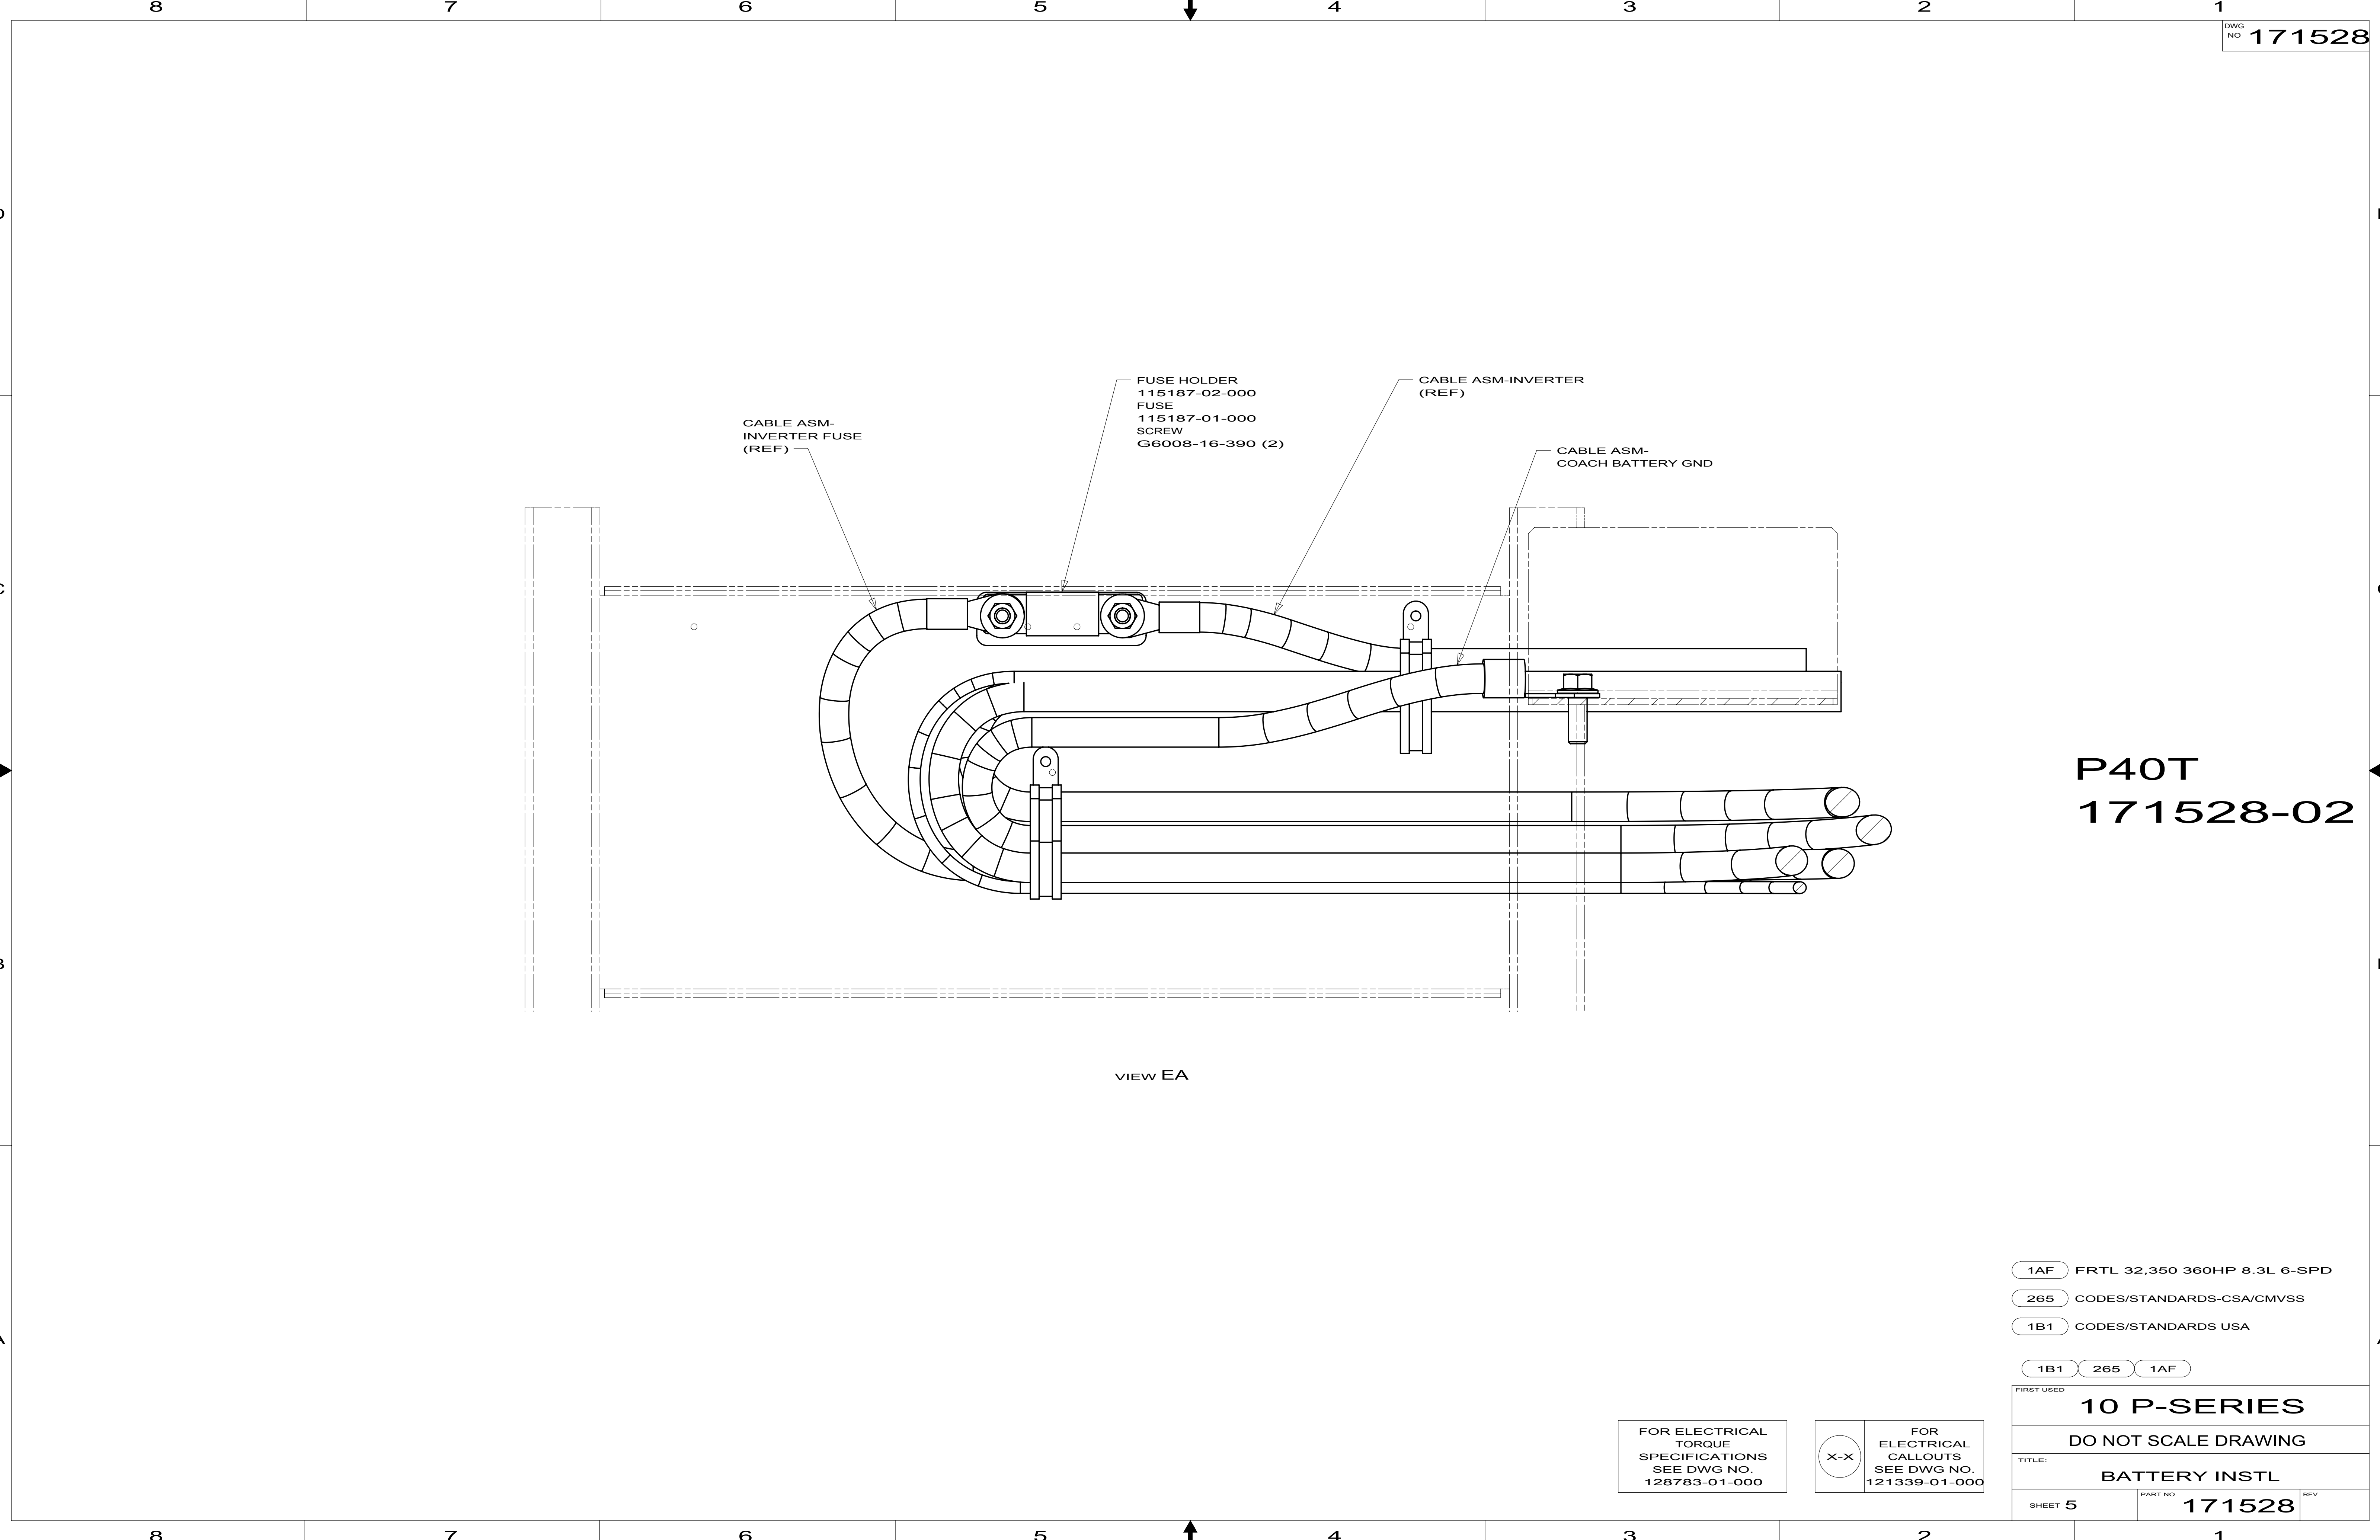
X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

P40T
171528-02

VIEW DB

VIEW DA



P40T
171528-02

VIEW EA

- 1AF FRTL 32,350 360HP 8.3L 6-SPD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 1AF

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 5	PART NO 171528	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

8

7

6

5

4

3

2

1

TERMINALS

NO.	PART NUMBER	DESCRIPTION
B-1 B-2 B-11 B-12	50003-01 50004-01 50003-02 50004-02	TERMINAL-PIN, 16-14 GA,.156 DIA TERMINAL-RECP, 16-14 GA,.156 DIA TERMINAL-PIN, 16-14 GA,.180 DIA TERMINAL-RECP, 16-14 GA,.180 DIA
WP-1 WP-2 WP-3	106950-01 106950-02 106950-03	TERMINAL-PIN, 16-14 GA TERMINAL-PIN, 10-12 GA TERMINAL-PIN, 8 GA
R-1 R-2 R-3 R-4 R-5 R-6 R-7 R-8 R-9	35416-01 35416-02 35416-03 35416-04 37018-01 102777-01 102777-02 102777-03 33787-01	TERMINAL-RING, #10 STD, 8 GA TERMINAL-RING, #10 STD, 6 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, 5/16 STD, 12-10 GA TERMINAL-RING, #6 STD, 14-16 GA TERMINAL-RING, #6 STD, 10-12 GA TERMINAL-RING, #6 STD, 8 GA TERMINAL-RING, #10 STD, 14 GA
R-60 R-61 R-62 R-63 R-64 R-65 R-66 R-67 R-68 R-69 R-70 R-71	8325-01 8326-01 8327-01 8328-01 8328-02 8329-01 8331-01 8332-01 8332-02 8350-01 99275-02 101397-01	TERMINAL-RING, 1/4 STD, 14-16 GA TERMINAL-RING, 3/8 STD, 14-16 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 8 GA TERMINAL-RING, 3/8 STD, 4 GA TERMINAL-RING, 1/4 STD, 6 GA TERMINAL-RING, 1/4 STD, 10 GA TERMINAL-RING, 3/8 STD, 6 GA TERMINAL-RING, 7/16 STD, 8 GA TERMINAL-RING, #10 STD, 14-16 GA
R-91 R-92 R-93 R-94	88791-01 88791-02 8348-01 99275-01	TERMINAL-RING, 3/8, 90° , 1/0 GA TERMINAL-RING, 3/8, 90° , 2 GA TERMINAL-RING, 3/8 STD, 2 GA TERMINAL-RING, 7/16 STD, 1/0 GA
RF-51 RF-52	7944-01 7945-01	TERMINAL-SPADE, 12-10 GA, #8 STUD TERMINAL-SPADE, 18-14 GA, #8 STUD
TR-1 TR-2 TR-3 TR-11 TR-12	47443-01 47443-02 47443-05 47443-03 47443-04	TERMINAL-RECP, 16-14 GA,.25, INS TERMINAL-RECP, 12-10 GA,.25, INS TERMINAL-RECP, 22-18 GA,.25, INS TERMINAL-RECP, 16-14 GA,.19, INS TERMINAL-RECP, 16-14 GA,.11, INS
TR-21	80015-01	TERMINAL-RECP, 22-18 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-22	80015-02	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-23	80015-03	TERMINAL-RECP, 16-14 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-24	80015-04	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .020
TR-51 TR-52 TR-53 TR-54 TR-55	7940-01 23809-01 23809-02 49270-01 7940-02	TERMINAL-RECP, 16-12 GA,.25, UNINS TERMINAL-RECP, 16-14 GA,.19, UNINS TERMINAL-RECP, 18-20 GA,.25, UNINS TERMINAL-RECP, 18-20 GA,.19, UNINS TERMINAL-RECP, 10 GA, .25, UNINS
TT-1 TT-2 TT-11	85745-02 85745-03 85745-04	TERMINAL-TAB, 16-14 GA,.25, INS TERMINAL-TAB, 10-12 GA,.25, INS TERMINAL-TAB, 18-22 GA,.19, INS
TT-51 TT-52	7942-01 7943-01	TERMINAL-TAB, 16-14 GA,.25, UNINS TERMINAL-TAB, 14-10 GA,.25, UNINS
MF6-1	129236-01	TERMINAL-FEM, M/P, 630, 10-12
MF6-2	129236-02	TERMINAL-FEM, M/P, 630, 14-16

SPLICES

NO.	PART NUMBER	DESCRIPTION
BS-1 BS-2 BS-3 BS-SB	31876-01 31876-02 31876-03 100070-01	SPLICE-BUTT, 16-14 GA, BLUE SPLICE-BUTT, 12-10 GA, YELLOW SPLICE-BUTT, 22-18 GA, RED SPLICE-BUTT, 14-16 GA, SHRINK,BLUE
BS-RB	112823-01	SPLICE-BUTT, 14-22 GA, REDUCER
BS-RS	173854-01	SPLICE-BUTT, 14-22 GA, REDUCER, SHRINK
S-1 S-2	7946-01 23808-01	SPLICE, 1-6 MM ² SPLICE, 6-9 MM ²
I-2 I-5	7956-02 7956-05	SHRINK WRAP .375 DIA SHRINK WRAP .25 DIA
SH-1	58028-01	SPLICE-HAT
S-10	101173-01	SPLICE-BARREL, 26300 CMA

NO.	PART NUMBER	DESCRIPTION
SP-1	90986-02	PLUG ASM-ELECTRIC STEP
SP-2	142524-01-000 098261-01-000 098262-07-000 098261-02-000 (3) 098262-01-000 (3)	HOUSING-4 PIN SOCKET-CONNECTOR SEAL-CONNECTOR SOCKET-CONNECTOR SEAL-CONNECTOR
HR-1	63910-01	HOUSING-RELAY
MP-8 MP-10 MPP CAV-1 CON-3	125323-02 125323-01 125324-01 125325-01 98262-03	HOUSING-PIN, 8 CAVITY HOUSING-PIN, 10 CAVITY TERMINAL-MALE, M/P, 150 SEAL-CAVITY, 150-SERIES M/P SEAL-CONNECTOR
LS-8 LS-10	125323-03 125323-04	LOCK-SECONDARY 8 POSITION LOCK-SECONDARY 10 POSITION
H-8 H-12	108355-01 108355-02	HOUSING-SWITCH, 8 POSITION HOUSING-SWITCH, 12 POSITION

NO.	PART NUMBER	DESCRIPTION
GEN-1	125323-02-000 125324-01-000 (4) 098262-03-000 (4) 125325-01-000 (4) 125323-03-000	HOUSING-8 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 8 POSITION
GEN-2	125323-01-000 125324-01-000 (5) 098262-03-000 (5) 125325-01-000 (5) 125323-04-000	HOUSING-10 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 10 POSITION

HOUSINGS AND TERMINALS

NO.	PART NUMBER	DESCRIPTION
HS-2 HS-3 HS-4 HS-5 HS-6 HS-7 HS-9 HS-12 HS-15 HS-2-R	88474-10 88474-09 88474-08 88474-07 88474-06 88474-05 88474-03 88474-01 88474-02 88474-12	HOUSING-SOCKET, 2 CAVITY HOUSING-SOCKET, 3 CAVITY HOUSING-SOCKET, 4 CAVITY HOUSING-SOCKET, 5 CAVITY HOUSING-SOCKET, 6 CAVITY HOUSING-SOCKET, 6 CAVITY-IN LINE HOUSING-SOCKET, 9 CAVITY HOUSING-SOCKET, 12 CAVITY HOUSING-SOCKET, 15 CAVITY HOUSING-SOCKET, 2 CAVITY-RED
HP-2 HP-3 HP-4 HP-5 HP-6 HP-7 HP-8 HP-9 HP-12 HP-15 HP-2-R HP-3-B HP-3-G HP-3-R	88473-10 88473-09 88473-08 88473-07 88473-06 88473-05 88473-04 88473-03 88473-01 88473-02 88473-15 88473-12 88473-13 88473-14	HOUSING-PIN, 2 CAVITY HOUSING-PIN, 3 CAVITY HOUSING-PIN, 4 CAVITY HOUSING-PIN, 5 CAVITY HOUSING-PIN, 6 CAVITY HOUSING-PIN, 6 CAVITY-IN LINE HOUSING-PIN, 8 CAVITY-IN LINE HOUSING-PIN, 9 CAVITY HOUSING-PIN, 12 CAVITY HOUSING-PIN, 15 CAVITY HOUSING-PIN, 2 CAVITY-RED HOUSING-PIN, 3 CAVITY-BLUE HOUSING-PIN, 3 CAVITY-GREEN HOUSING-PIN, 3 CAVITY-RED
TS-1 TS-2	88476-01 88476-02	SOCKET-CONNECTOR, 20-14 GA SOCKET-CONNECTOR, 12-10 GA
TP-1 TP-2	88475-01 88475-02	PIN-CONNECTOR, 20-14 GA PIN-CONNECTOR, 12-10 GA
HS2HA HP2HA	137208-01 137207-01	HOUSING-SOCKET, 2 CAVITY-HIGH AMP HOUSING-PIN, 2 CAVITY-HIGH AMP
TS-HA TP-HA	137210-01 137209-01	SOCKET-CONNECTOR, 10AWG HIGH AMP PIN-CONNECTOR, 10AWG HIGH AMP
H-HA	104100-01	HOUSING, 1 CAVITY 75 AMP
T-HA	104100-03	TERMINAL 10 AWG - 6 AWG 75 AMP

BALLOON CALLOUT LEGEND

110 V WIRE	TERMINALS/SPLICES	RECEPTACLES
PART NUMBER COLOR LENGTH	PART NUMBER QUANTITY	PART NUMBER CIRCUIT COLOR LOCATION
POWER CORD	CONDUIT	12 V WIRE
WIRE GAUGE LENGTH IN FEET APPROVAL/ LISTING	TYPE DIA IN 1/16" INCREMENTS LENGTH (mm)	CIRCUIT COLOR & WIRE GAUGE HOUSING POSITION/ TERMINATION

NOTES:

1

FOR RECP-BLANK, DET-X DENOTES DETAIL VIEW.

2

CONTACT WIRE PREP PRIOR TO USING FOR TOOLING PURPOSES.

8

7

6

5

4

3


2


1

REF:

1

2/16/2010

		COPYRIGHT 1980 WINNEBAGO INDUSTRIES, INC.	
DFT R		ORIG. DATE	
CHRR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.			
DSNR		FIRST USED	
		96 MH'S	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ±			
ONE-PLACE (X.X) ±			
TWO-PLACE (X.XX) ±			
ANGLE ±			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
PART LISTING-ELECTRICAL			
SHEET 1 OF 7	PART NO	REV	
		121339	

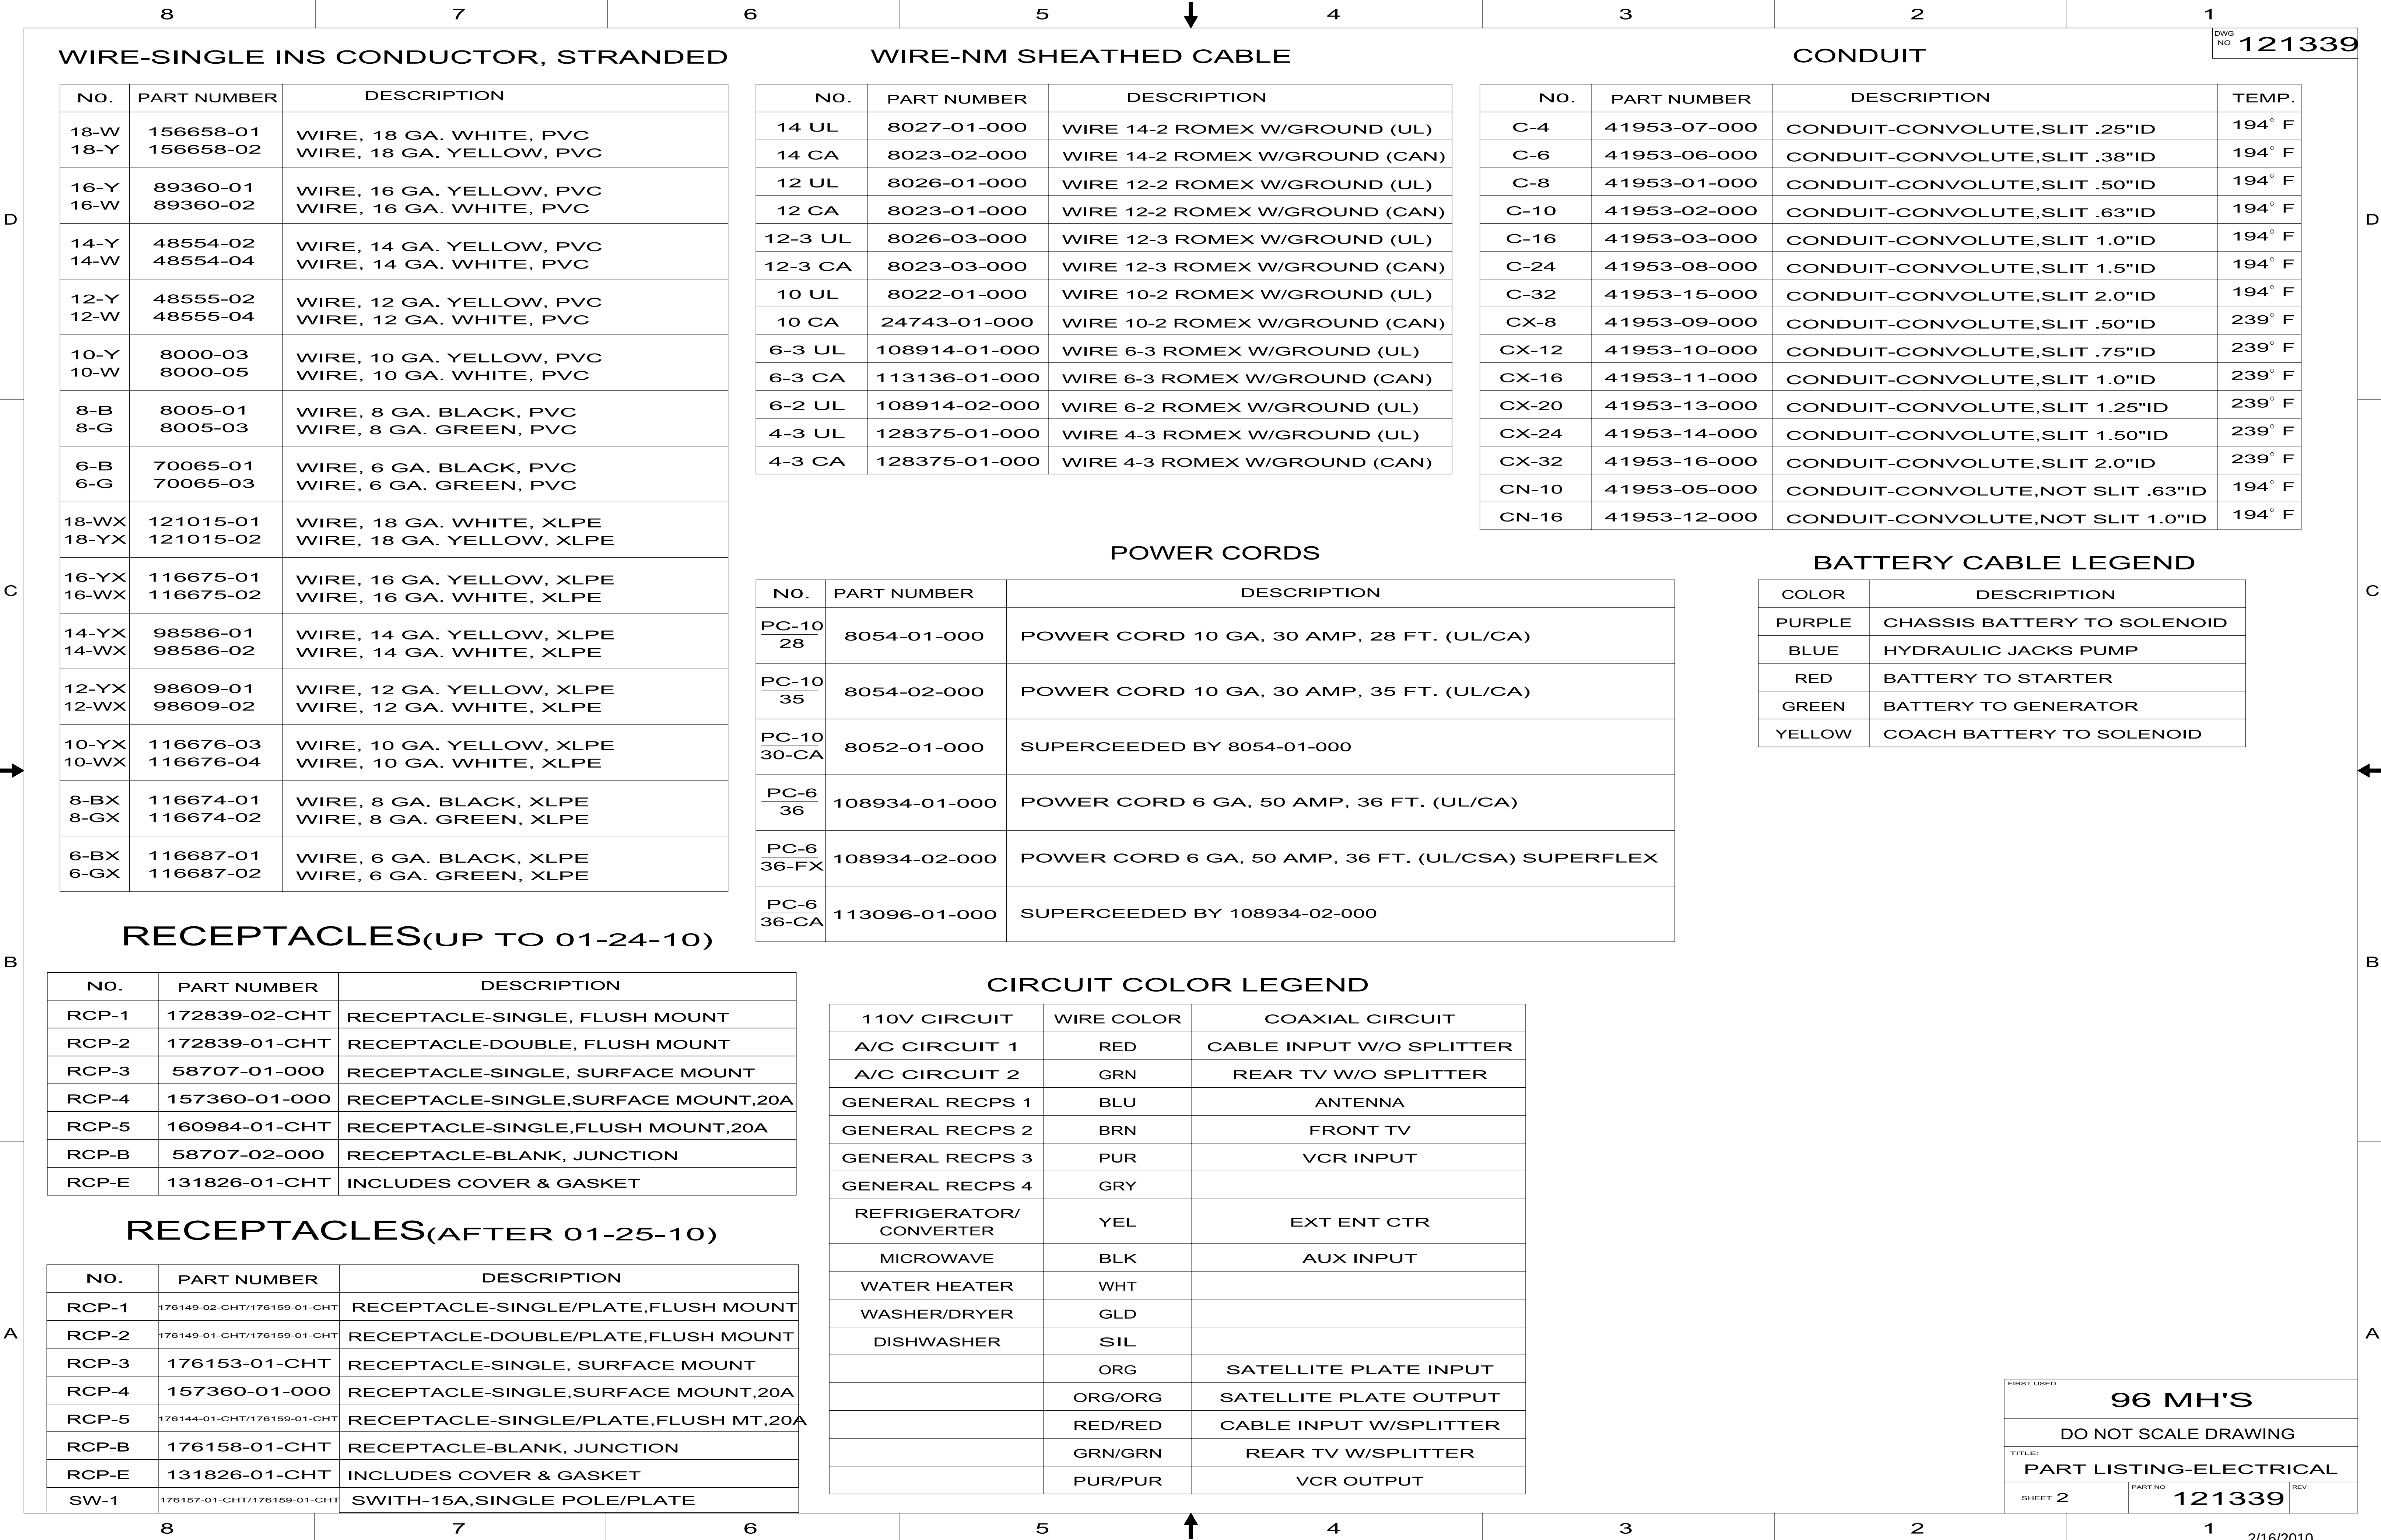

8

7

6

5








4

3




2

1

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-1	LAMP 98024-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-1	LAMP 98024-03-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-1	LAMP 98024-05-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-1	LAMP 98024-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N1	LAMP 98024-07-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LF2N1	LAMP 98024-08-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN1	LAMP 98024-09-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,PORCH

NO	PART NUMBER	DESCRIPTION
LEXT-1	LAMP 97917-01-CHT SCREW G67-10-129 (4) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, SURFACE MOUNT BARGMAN 
LEXT-2UL	LAMP 8089-01-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED UL LIST JRV PROD 
LEXT-2CA	LAMP 8089-02-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED CAN LIST JRV PROD 
LEXT-3	LAMP 171513-01-CHT SCREW G67-10-129 (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH SURFACE MOUNT OPTRONICS

87.0

22.2 R

96

CUT OUT IN PANEL

HALOGEN LAMP

LINE SPRING CLIPS UP WITH RELIEF IN CUT OUT

DETAIL CA

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

XXXXXX

XX

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 3





PART NO121339

REV





DWG NO121339

2/16/2010

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-2	LAMP 137417-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-2	LAMP 137417-04-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-2	LAMP 137417-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-2	LAMP 137417-05-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N2	LAMP 137417-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN2	LAMP 137417-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,HALOGEN

NO	PART NUMBER	DESCRIPTION
HAL	LAMP 123775-01-CHT SCREW (SUPPLIED) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING 1 BULB 
HAL-S	LAMP 123775-01-CHT SPACER 123775-02-CHT SCREW G13-06-16U (3) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING WITH 3/4" SPACER 1 BULB 
HAL-2	LIGHT-HAL,ROUND 165170-01-CHT SCREW G13-06-12B (2) CONNECTOR 58028-01-000 (2)	LIGHT-HALOGEN, ROUND 3" 
HAL-4	LIGHT-HAL,ROUND 165643-01-CHT SCREW G13-05-16B (3) CONNECTOR 58028-01-000 (2) (SEE DETAIL CA)	LIGHT-HALOGEN, ROUND 4.5" 

8

7

6



























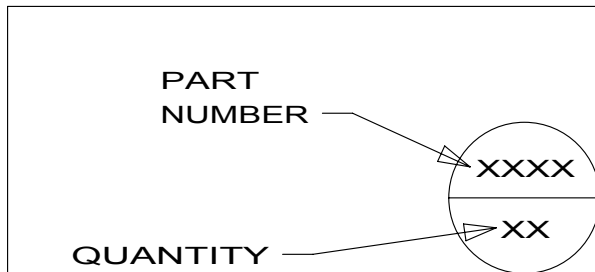
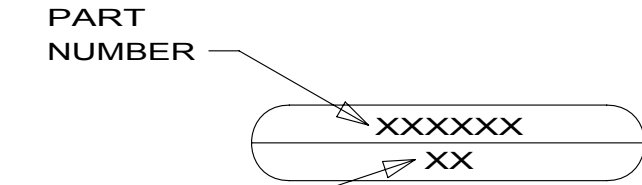
5







4


3


2




1




8			7			6			5			4			3			2			1																																																																							
LAMP ASM-PACKAGE,FLUORESCENT																		LAMP ASM-PACKAGE,MAKEUP LAMP																		LAMP ASM-PACKAGE,OTHER																		LAMP ASM-PACKAGE,PANCAKE																		DWG NO 121339																				
NO		PART NUMBER				DESCRIPTION												NO		PART NUMBER				DESCRIPTION												NO		PART NUMBER				DESCRIPTION																																																		
FLU-1		LAMP 91936-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH THIN-LITE 												LMU3-1		LAMP 110235-01-CHT SCREW W/SPACER (SUPPLIED) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB (SUPPLIED) PROGRESSIVE DYNAMICS 												LSH-1		LAMP 121935-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-SHOWER PROGRESSIVE DYNAMICS INC. 												LF1-3		LAMP 170693-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH GUSTAFSON 																																
FLU-2		LAMP 91936-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/SWITCH THIN-LITE 												LMM3-2		LAMP 123774-03-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 3 BULB GUSTOFSON 												LSH-2		LAMP 164039-01-CHT SCREW G11-08-16U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER 												LF2-3		LAMP 170693-04-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH GUSTAFSON 																																
FLU-3		LAMP 127327-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 1-12" BULB W/SWITCH THIN-LITE 												LMU3-2		LAMP 138116-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 												LSH-3		LAMP 164040-01-CHT SCREW G13-07-12U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER GLASS 												LO1-3		LAMP 170693-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH GUSTAFSON 																																
FLU-4		LAMP 130338-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT W/SWITCH THIN-LITE 												LMU3-3		LAMP 162446-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 												LCR-1		LAMP 61424-01-000 SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE RAMCO (RECTANGULAR) 												L02-3		LAMP 170693-05-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH GUSTAFSON 																																
FLU-5		LAMP 153464-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336												LMU4-1		LAMP 110235-02-CHT SCREW G11-08-16U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB PROGRESSIVE DYNAMICS 												LCS-1		LAMP 108354-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE ITC MARINE (SQUARE) 												LF1N3		LAMP 170693-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH GUSTAFSON 																																
FLU-6		LAMP 130338-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT WARM WHITE BULB W/SWITCH THIN-LITE 												LMU4-2		LAMP 138116-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 												READ-1		LIGHT-READING 132427-01-CHT SCREW SUPPLIED W/ LIGHT CLIP-U 141395-02-CHT (2) CONNECTOR 58028-01-000 (2)				LIGHT-READING,SWIVEL,ROUND 1 BULB 												LFSN3		LAMP 170693-06-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH GUSTAFSON 																																
FLU-7		LAMP 153464-05-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336												LMU4-3		LAMP 162446-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 												READ-2		LIGHT-READING 128786-02-CHT SCREW G11-08-16J (2) BULB 123917-01-000 CONNECTOR 58028-01-000 (2)				LIGHT,READING,SWIVEL 												LOS3		LAMP 170693-07-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 2 BULB W/O SWITCH GUSTAFSON 																																
FLU-8		LAMP 173072-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" ONE 8 WATT BULB W/SWITCH OPTRONICS 												LMM4-2		LAMP 123774-01-CHT SCREW G11-08-16U (2) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 4 BULB GUSTOFSON 												READ-3		LIGHT-READING 170833-01-CHT SCREW SUPPLIED W/LIGHT CONNECTOR 58028-01-000 (2)				LIGHT,READING,HAL 												LO1N3		LAMP 170693-08-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 1 BULB W/O SWITCH GUSTAFSON 																																
FLUN1		LAMP 91936-04-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH THIN-LITE 																																																																																						
FLUN2		LAMP 91936-03-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH THIN-LITE 																																																																																						
FLUN3		LAMP 153464-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336																																																																																						
FLUN4		LAMP 153464-03-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 480																																																																																						
FLUN5		LAMP 153464-06-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 480																																																																																						
FLUN6		LAMP 153464-04-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336																																																																																						
																																				LEGEND																																																								
																																																																																												

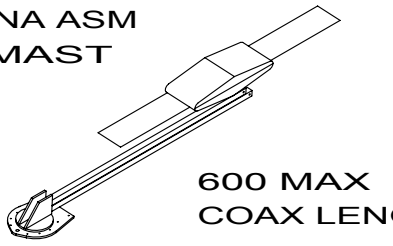


ANTENNA ASM-PACKAGE		
NO	PART NUMBER	DESCRIPTION
ANT-1	ANTENNA 76319-24-000 HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) CLIP 80734-02-000	ROOF MOUNT TV ANTENNA ASM 25.5" MAST  600 MAX COAX LENGTH
ANT-2	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANT-2W	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA WEDGE 76319-26-000	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANTA-1	ANTENNA 158270-01-CHT BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-WINGMAN, ACCESSORY 173519-03-CHT	ROOF MOUNT TV ANTENNA ASM AUTOMATIC  600 MAX COAX LENGTH
ANT-3	ANTENNA-TV ROOF MNT.ROUND 167632-01-CHT PLATE-ROOF, CABLE ENTRY 146488-01-000 SCREW G67-10-129 (10) CABLE ASM-COAX 87105-01-006 ADAPTER 82134-01-000	ROOF MOUNT OMNI- DIRECTIONAL ANTENNA MOUNTING SCREWS SUPPLIED WITH ANTENNA 
ANT-4	ANTENNA 173519-01-CHT HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-HANDLE EXTENSION 173519-02-CHT	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH

SENSORS		
NO	PART NUMBER	DESCRIPTION
LPGD	LP GAS DETECTOR 150138-03-CHT SCREW G68-06-10U (2)	DETECTOR-LP GAS 

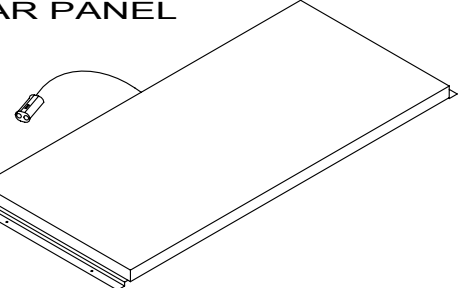PANELS		
NO	PART NUMBER	DESCRIPTION
SOLAR	PANEL-SOLAR 10 WATT 151647-01-000 SCREW G11-08-12U (4)	SOLAR PANEL 

ANTENNA ASM-PACKAGE		
ANTEXT-1	CABLE ASM-EXTENS 77069-02-000	RADIO ANTENNA CABLE EXTENSION 2400MM USABLE LENGTH 
ANTKIT-1	ADAPTER-PLATE 76319-06-000 SCREW G11-08-08T (6) CLIP-WIRE 80734-02-000 SCREW G11-08-08T	PLATE ASM-ADAPTERS CABLE ROOF MOUNTING PLATE W/ CABLE-CABLE ADAPTER, FITTINGS, AND CABLE RETAINING CLIP 
ANT-R	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT ANTENNA 109889-04-000 BRACKET-ANTENNA GROUND 147741-01-CHT	ROOF MOUNT RADIO ANTENNA 
ANTEXT-2	CABLE ASM-EXTENS 77069-03-000	RADIO ANTENNA CABLE EXTENSION 6600 MM USABLE LENGTH
ANT-A	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT 76 MM 171825-01-000 (2) BRACKET-GROUND 147741-01-CHT NUT OMD01K-06-000 (2)	ROOF MOUNT RADIO ANTENNA THICK ROOF

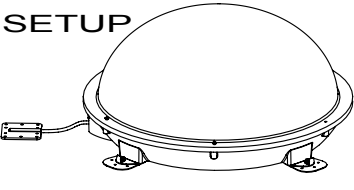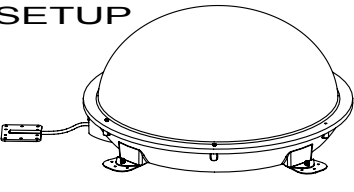SATELLITE DISH INSTL		
NO	PART NUMBER	DESCRIPTION
DM-1	SATELLITE DISH 137135-02-000 SCREW G67-10-12B (8) PLATE & BRACKET (SUPPLIED) SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 
DA-1	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-1	SATELLITE DISH 154474-04-CHT SCREW G39-10-12B (12) PLATE 146488-01-000 SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM IN MOTION SETUP 

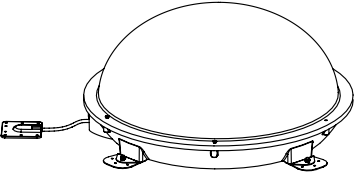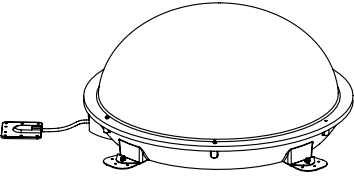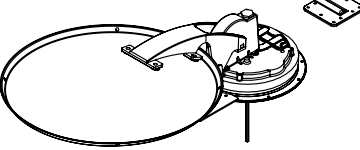SATELLITE DISH INSTL		
NO	PART NUMBER	DESCRIPTION
DA-2	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-2	SATELLITE DISH 154474-04-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DM-2	SATELLITE DISH 137135-05-000 PLATE-ROOF,ENTRY (SUPPLIED WITH SATELLITE DISH) SCREW G67-10-12U (8) (FOR ROOF PLATE) SCREW G67-10-12U (10) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 

LEGEND

PART NUMBER

QUANTITY

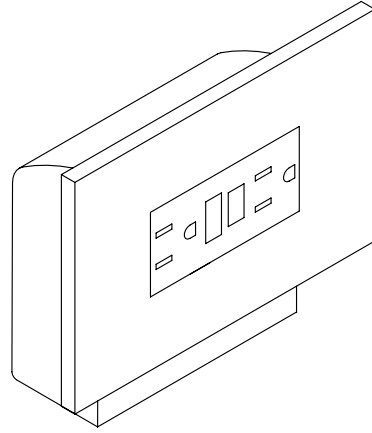
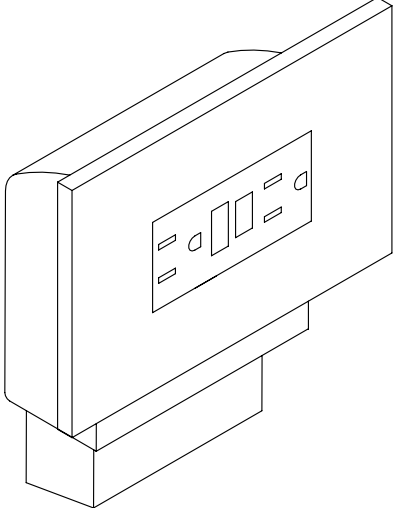
PART NUMBER

QUANTITY



87654321

DWG NO121339

RECEPTACLE PACKAGE-GFI

NO	PART NUMBER	DESCRIPTION
<u>GFI</u> US	RECEPTACLE 163319-01-CHT BOX 91910-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI</u> CAN	RECEPTACLE 163319-01-CHT BOX 91910-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

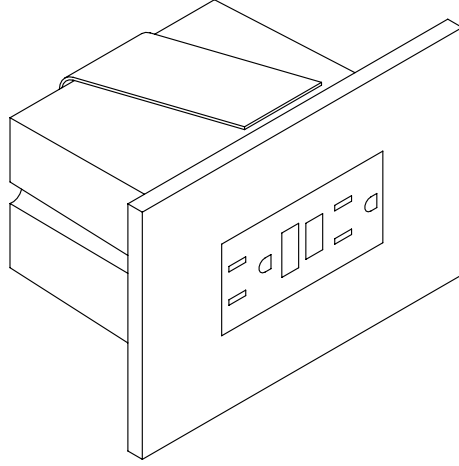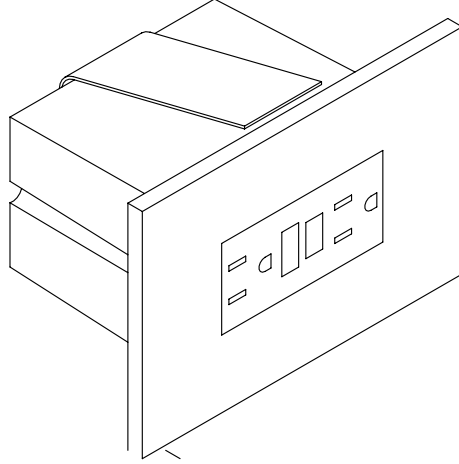RECEPTACLE PACKAGE-GFI






NO	PART NUMBER	DESCRIPTION
<u>GFI-1</u> US	RECEPTACLE 163319-01-CHT BOX 133070-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI-1</u> CAN	RECEPTACLE 163319-01-CHT BOX 133070-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

NOTES:

1


APPLY TUBING TO BARE GROUND WIRES.

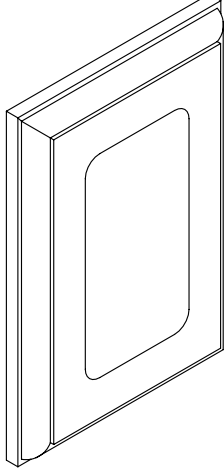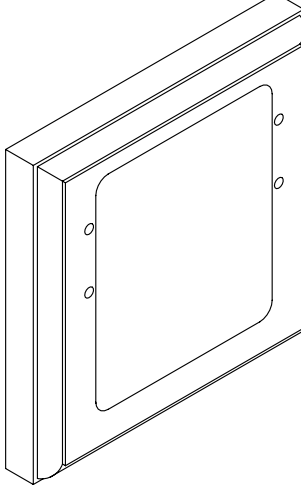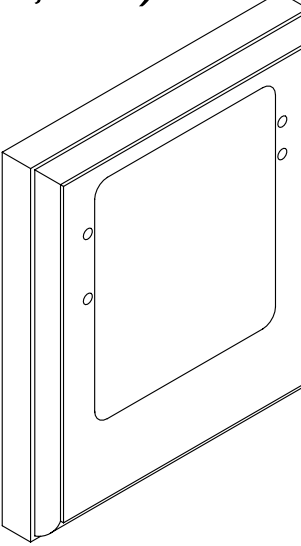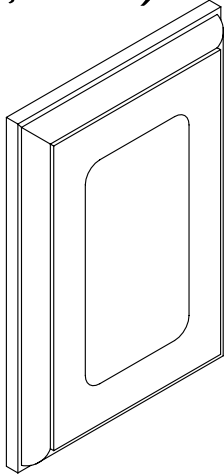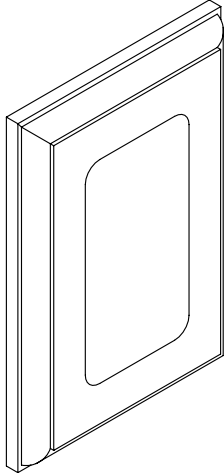SPACERS

NO	PART NUMBER	DESCRIPTION
SP-01	SPACER 102568-01-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,OG) 
SP-02	SPACER 102568-02-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (US) (WOOD,VYL RAP,OG) 
SP-03	SPACER 102568-03-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (CANADA) (WOOD,VYL RAP,OG) 
SP-04	SPACER 133713-01-CHT	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,BEV) 
SP-05	SPACER 133713-20-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,BEV) 

SP-21

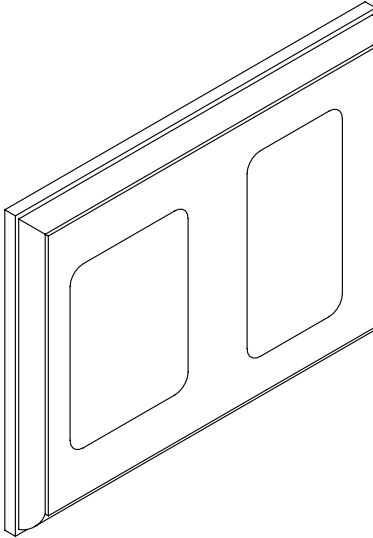SPACER
126052-01-XXX

WOOD SPACER FOR 1 - 110V
RECEPTACLE AND 1 - REAR TV
(12V) JACK
(WOOD,BEV)


LEGEND

MISC.	SPACER
PART NUMBER XXXX LISTING XXX	XXXX PART NUMBER

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 6

PART NO121339

REV

2/16/2010

87654321

D

C


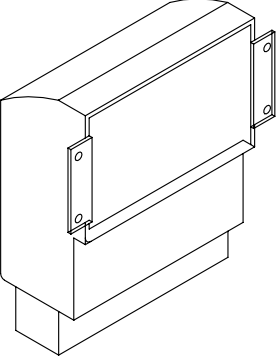
B

A


1

DWG NO121339


PREP-A/C, RECESSED (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP A/C-US	BOX 91910-02-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). US APPLICATION (RECESSED IN ROOF) 
PREP A/C-CAN	BOX 91910-01-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). CANADA APPLICATION (RECESSED IN ROOF) 

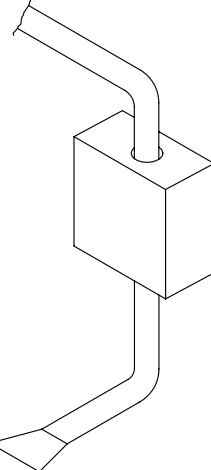
CONNECTION BOX-POWER CORD

NO	PART NUMBER	DESCRIPTION
J-PC 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 CONNECTOR 8314-01-000 (3) CONNECTOR 8356-02-000 CONNECTOR (PC) 8355-01-000	CONNECTION BOX IN POWER CORD COMPT FOR POWER CORD (US & CA APPLICATION) 
J-PC 30-US		
J-PC 30-CA		

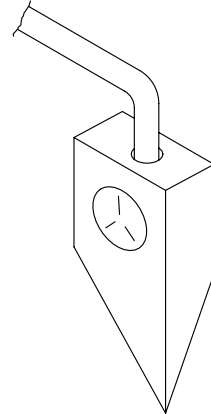
CONNECTION BOX-GENERATOR RECEPTACLE

NO	PART NUMBER	DESCRIPTION
J-RCP 30	BOX 8289-01-000 RECEPTACLE 24924-02-000 COVER 69238-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 133678-04-000 CONNECTOR 8314-01-000 TUBING-VINYL 8041-02-000 (150MM)	CONNECTION BOX IN POWER CORD COMPT FOR THE GENERATOR RECEPTACLE (US & CA APPLICATION) 
J-RCP 30-US		
J-RCP 30-CA		

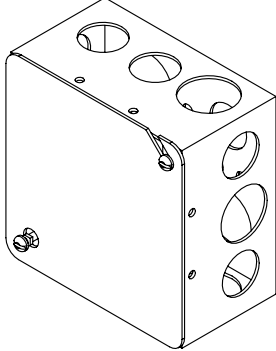CONNECTION BOX, GENERATOR SERVICE FEED

NO	PART NUMBER	DESCRIPTION
J-GEN 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 WIRE NUT-GREY 8314-01-000 (3) CONNECTOR-WIRE 8356-01-000	BOX AND EQUIPMENT USED FOR CONNECTING THE GENERATOR LEADS TO THE SERVICE ENTRANCE WIRES (US & CA APPLICATION) 
J-GEN 30-US		
J-GEN 30-CA		

PREP-A/C, SURFACE (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP SURF	BOX 93603-01-000 COVER 53337-01-000 LABEL 91243-01-000 WIRE-BONDING 8019-01-000 SCREW G11-08-12B (2) TERMINAL 8328-01-000 CONNECTOR 8313-01-000 (2) CONNECTOR 8311-01-000	SURFACE MOUNT, US AND CANADA, BOX AND EQUIPMENT FOR A/C PREP (W/OUT FACTORY A/C). TYPICALLY LOCATED ON OVERHEAD CABINET INNER WALL OR ON CEILING. 

LEGEND

PART NUMBER

LISTING

XXXX

XX

NOTES:

1 APPLY TUBING TO BARE GROUND WIRES.

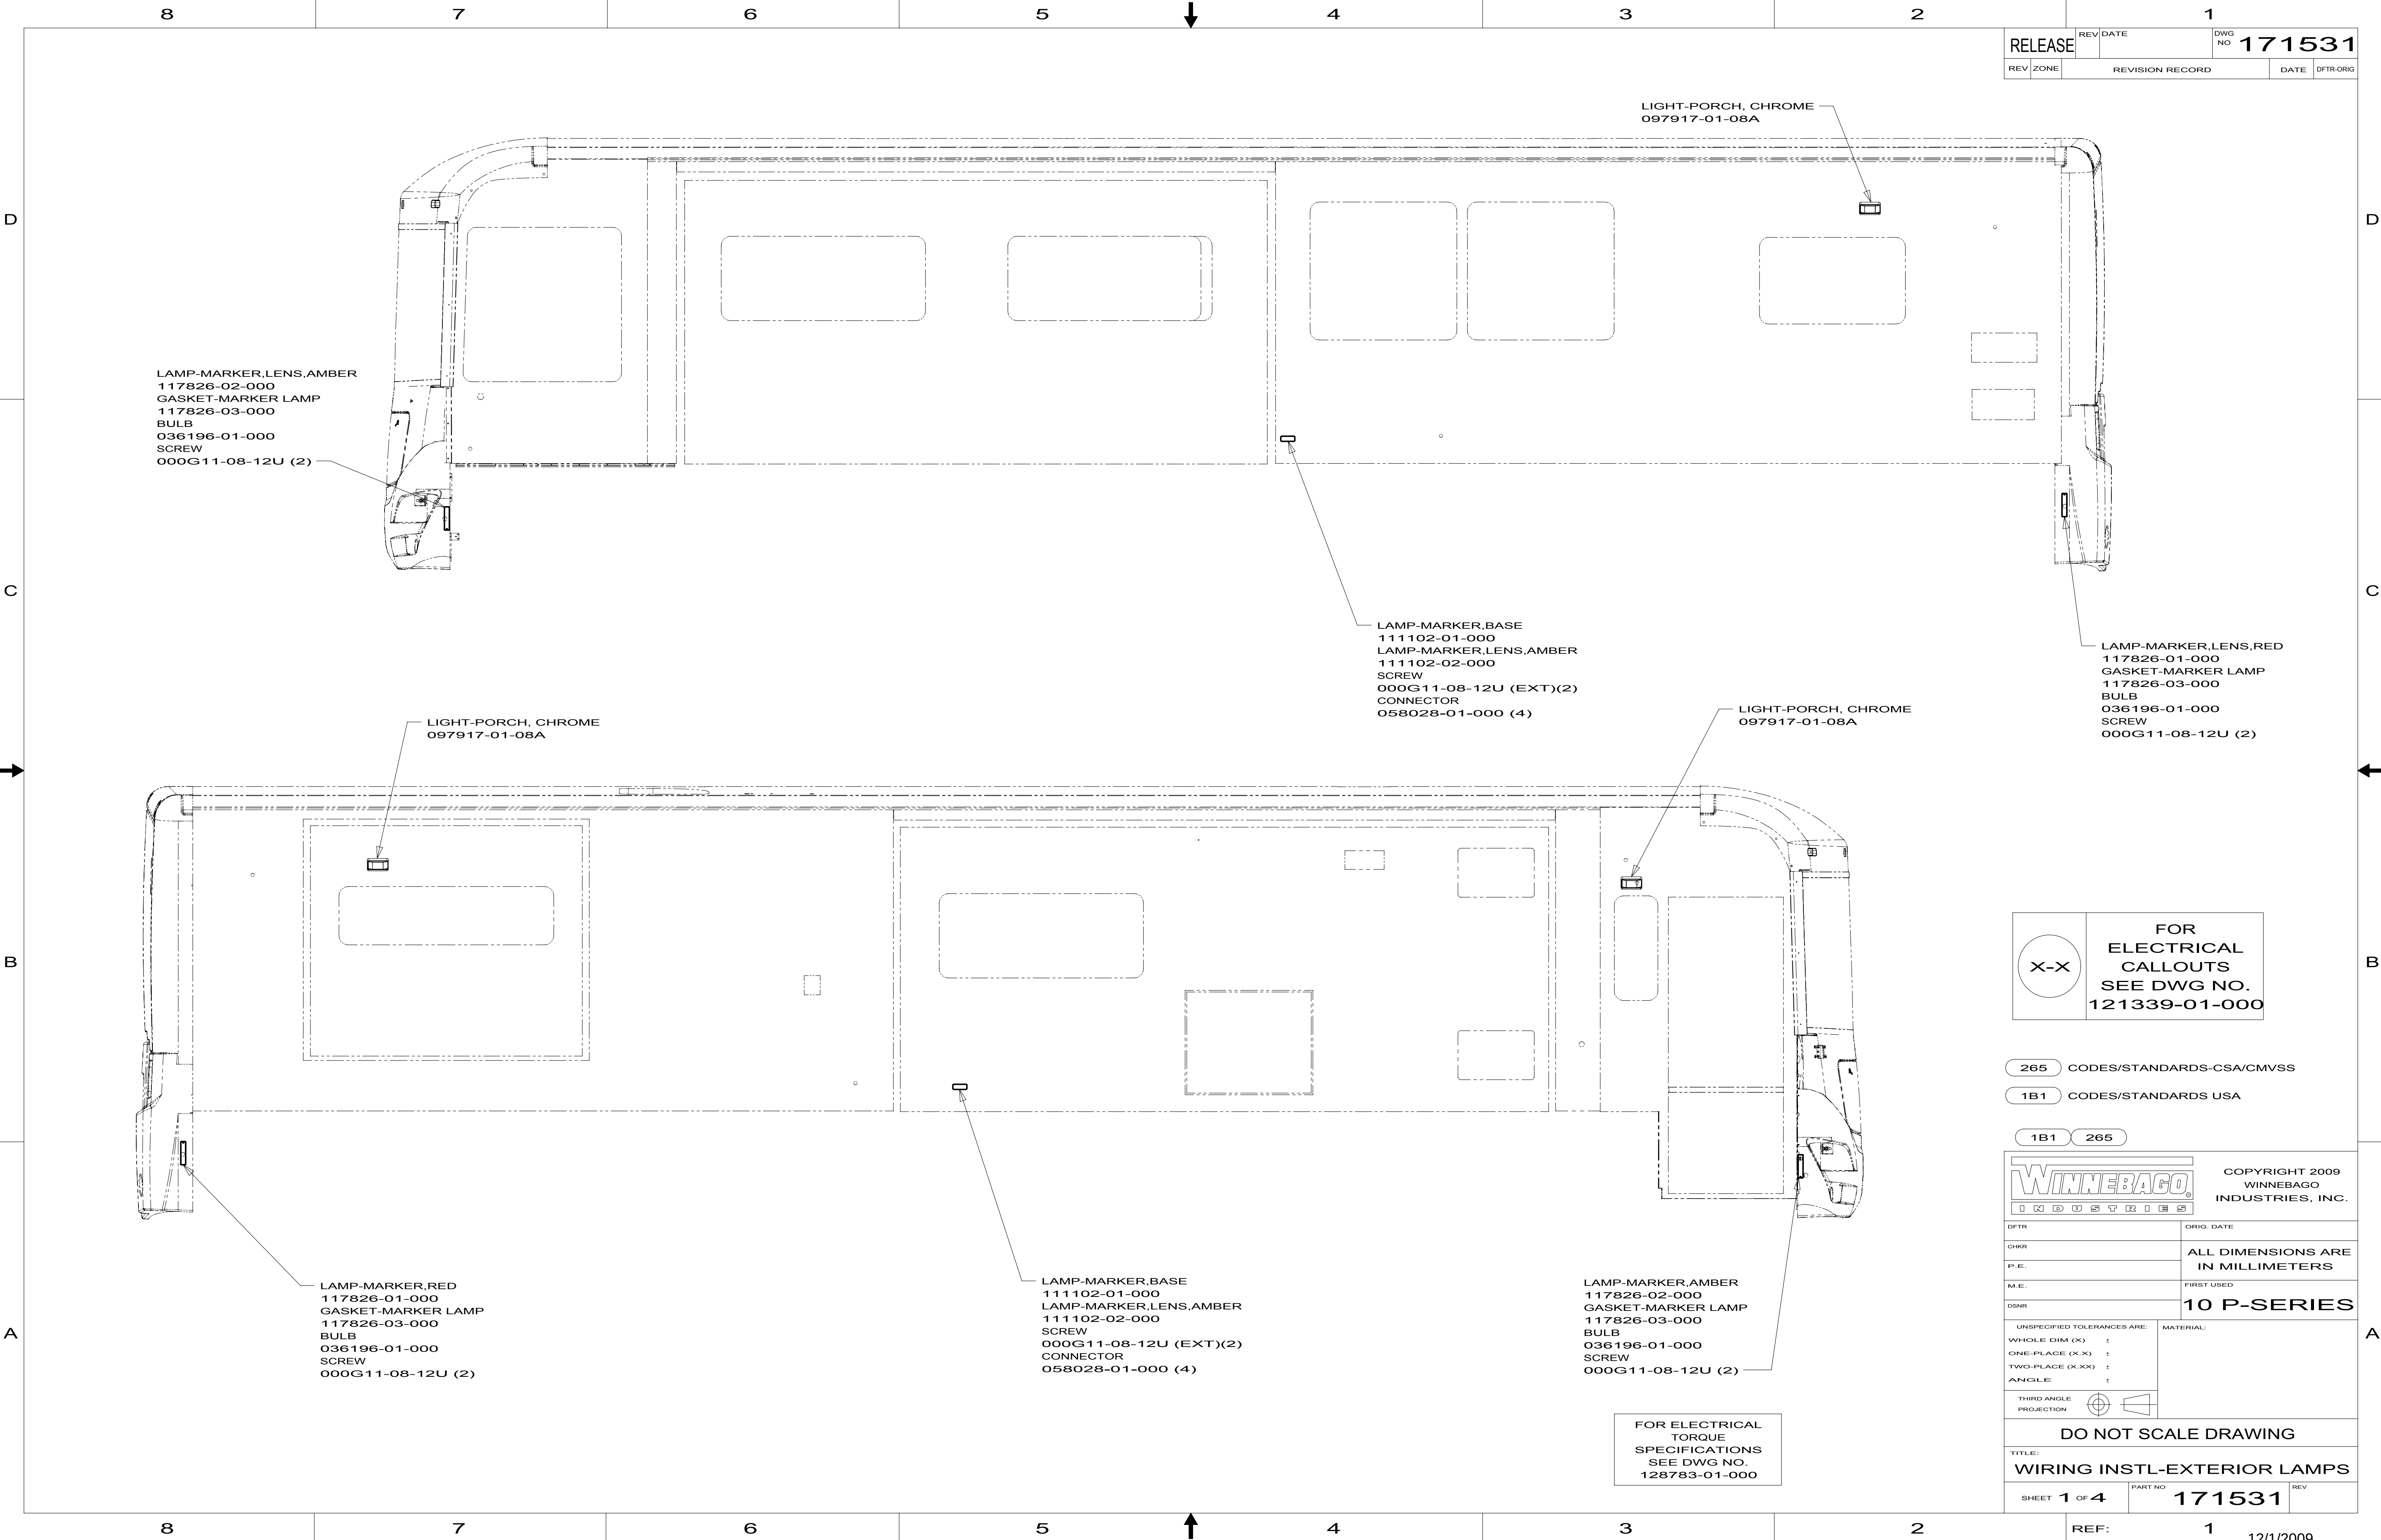
96 MH'S

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL

SHEET 7PART NO121339REV

2/16/2010



LAMP-MARKER,LENS,AMBER
117826-02-000
GASKET-MARKER LAMP
117826-03-000
BULB
036196-01-000
SCREW
000G11-08-12U (2)

LIGHT-PORCH, CHROME
097917-01-08A

LAMP-MARKER,RED
117826-01-000
GASKET-MARKER LAMP
117826-03-000
BULB
036196-01-000
SCREW
000G11-08-12U (2)

LAMP-MARKER,BASE
111102-01-000
LAMP-MARKER,LENS,AMBER
111102-02-000
SCREW
000G11-08-12U (EXT)(2)
CONNECTOR
058028-01-000 (4)

LAMP-MARKER,BASE
111102-01-000
LAMP-MARKER,LENS,AMBER
111102-02-000
SCREW
000G11-08-12U (EXT)(2)
CONNECTOR
058028-01-000 (4)

LAMP-MARKER,AMBER
117826-02-000
GASKET-MARKER LAMP
117826-03-000
BULB
036196-01-000
SCREW
000G11-08-12U (2)

LIGHT-PORCH, CHROME
097917-01-08A

LIGHT-PORCH, CHROME
097917-01-08A

LAMP-MARKER,LENS,RED
117826-01-000
GASKET-MARKER LAMP
117826-03-000
BULB
036196-01-000
SCREW
000G11-08-12U (2)

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265



COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.


DFTR	ORIG. DATE
CHKR	
P.E.	ALL DIMENSIONS ARE IN MILLIMETERS
M.E.	FIRST USED
DSNR	10 P-SERIES
UNSPECIFIED TOLERANCES ARE:	MATERIAL:
WHOLE DIM (X) ±	
ONE-PLACE (X.X) ±	
TWO-PLACE (X.XX) ±	
ANGLE ±	
THIRD ANGLE PROJECTION	


DO NOT SCALE DRAWING

TITLE:
WIRING INSTL-EXTERIOR LAMPS

SHEET 1 OF 4 PART NO 171531 REV

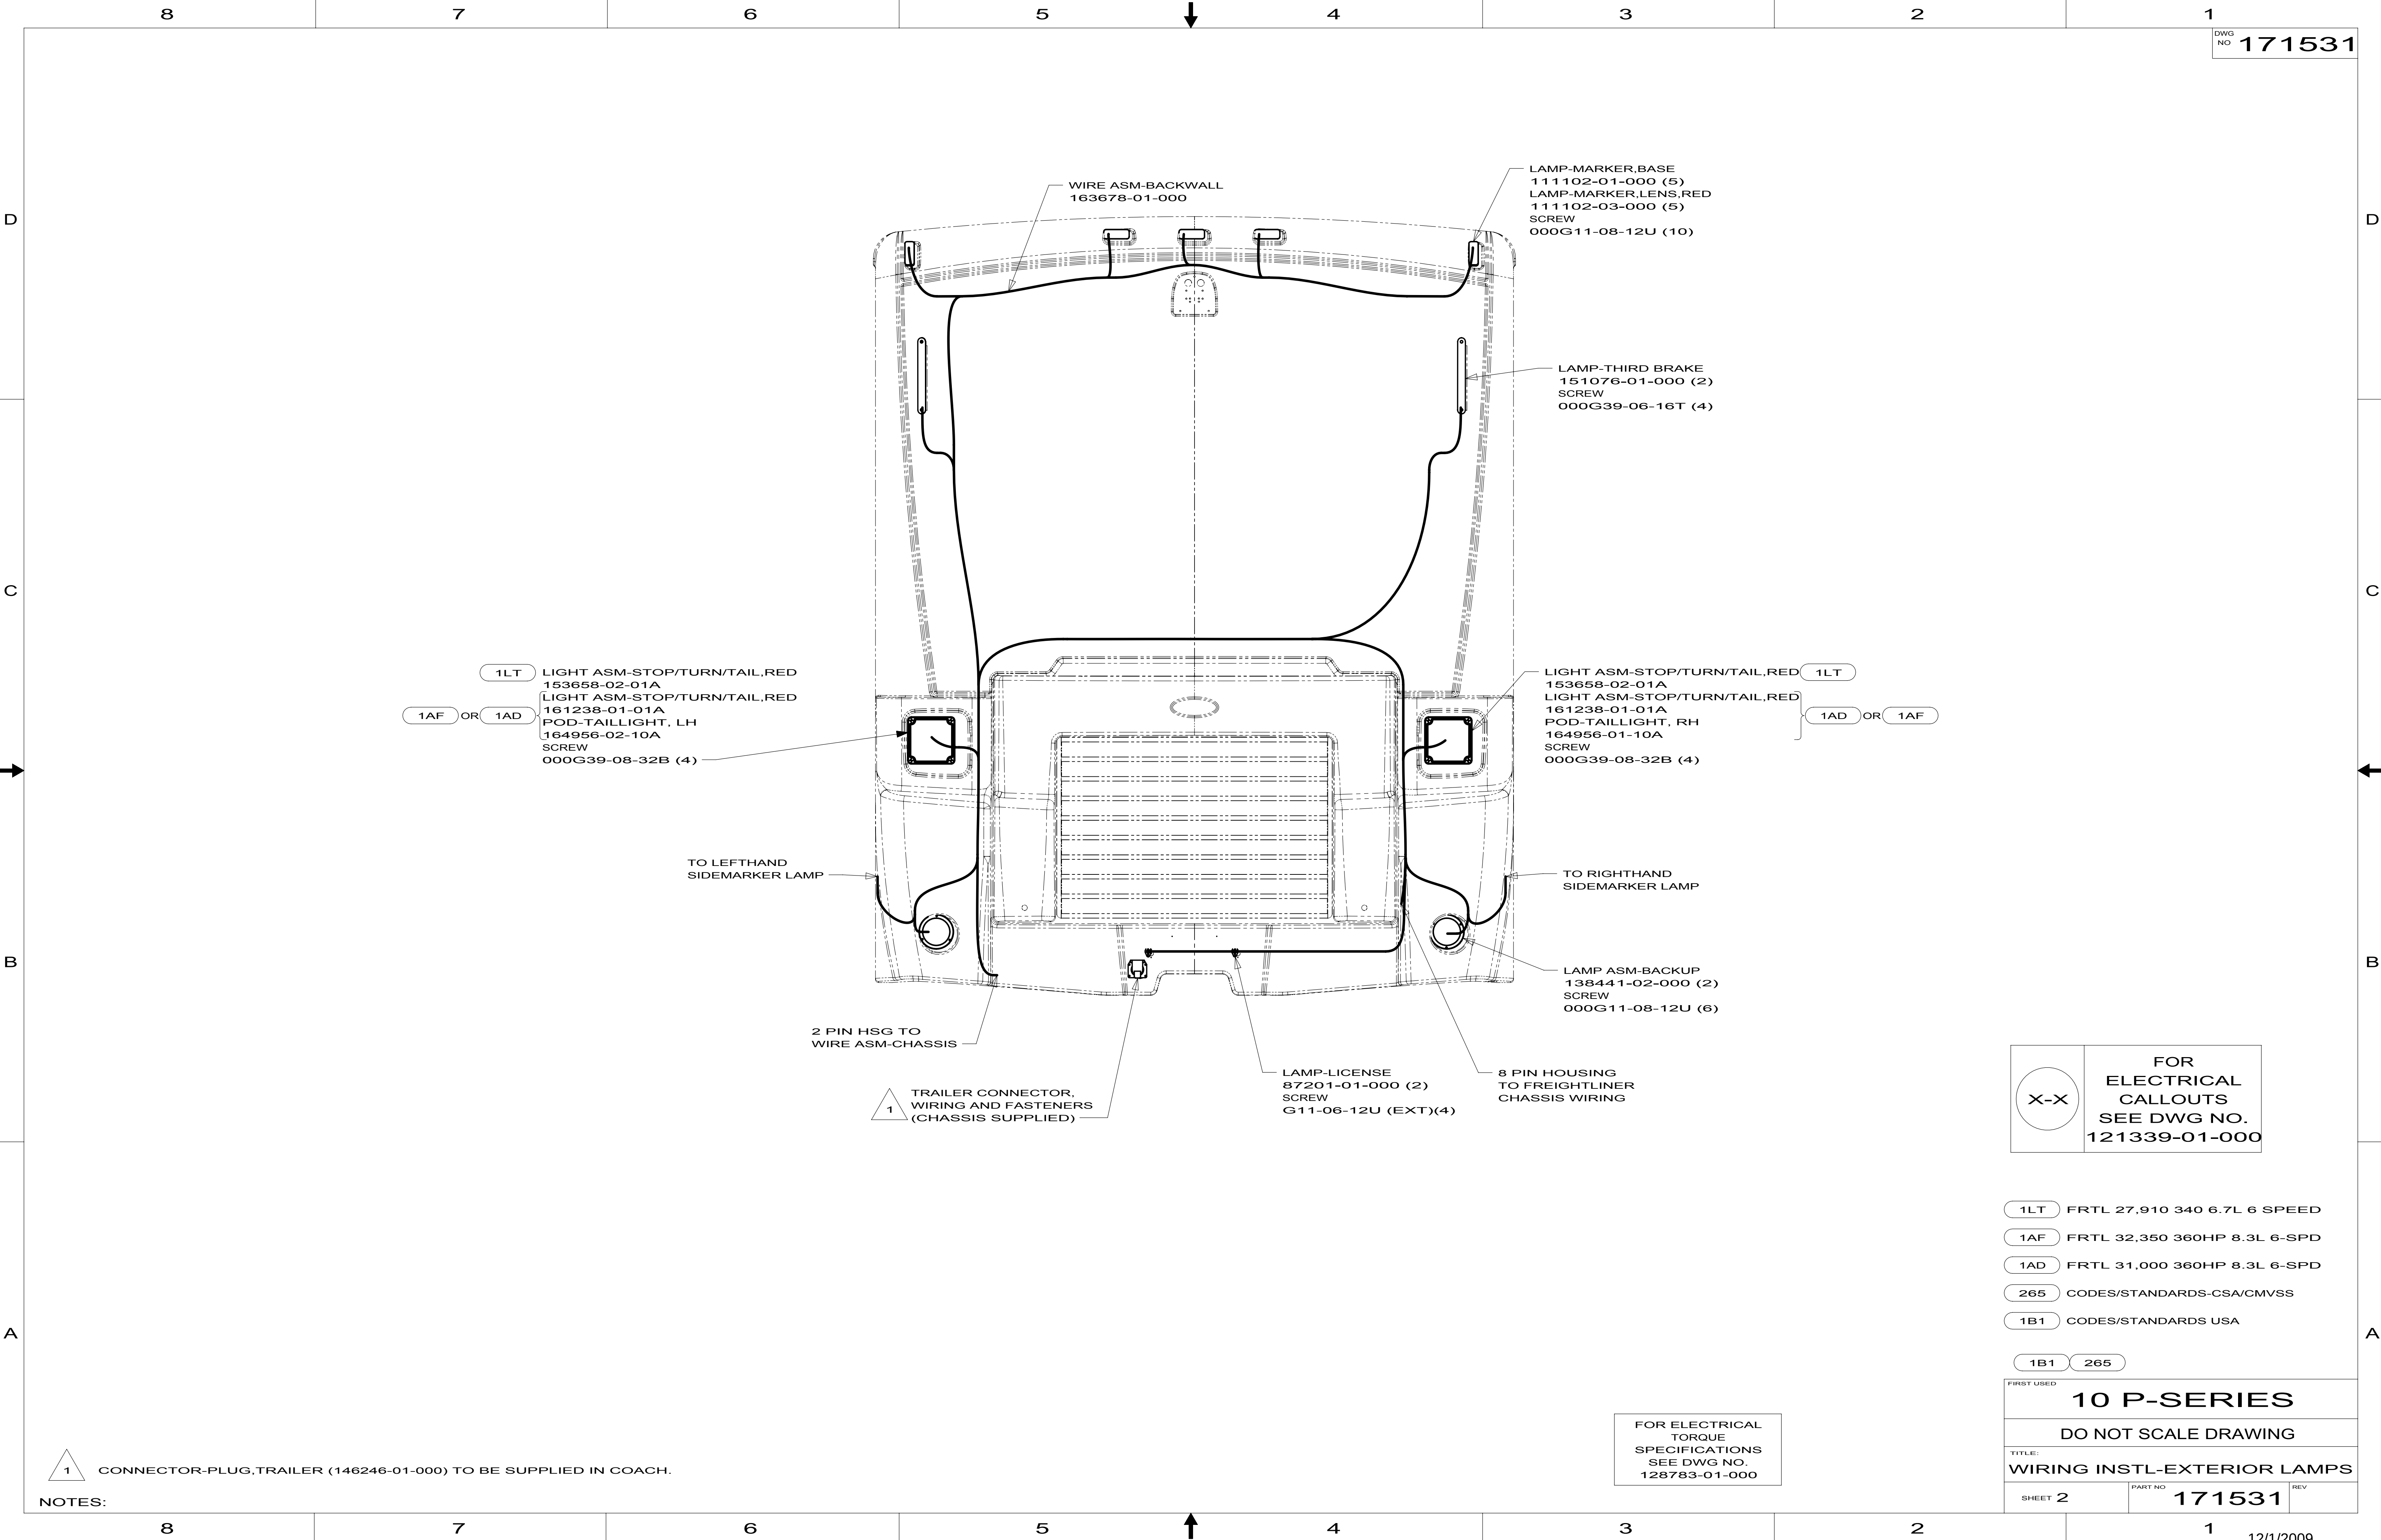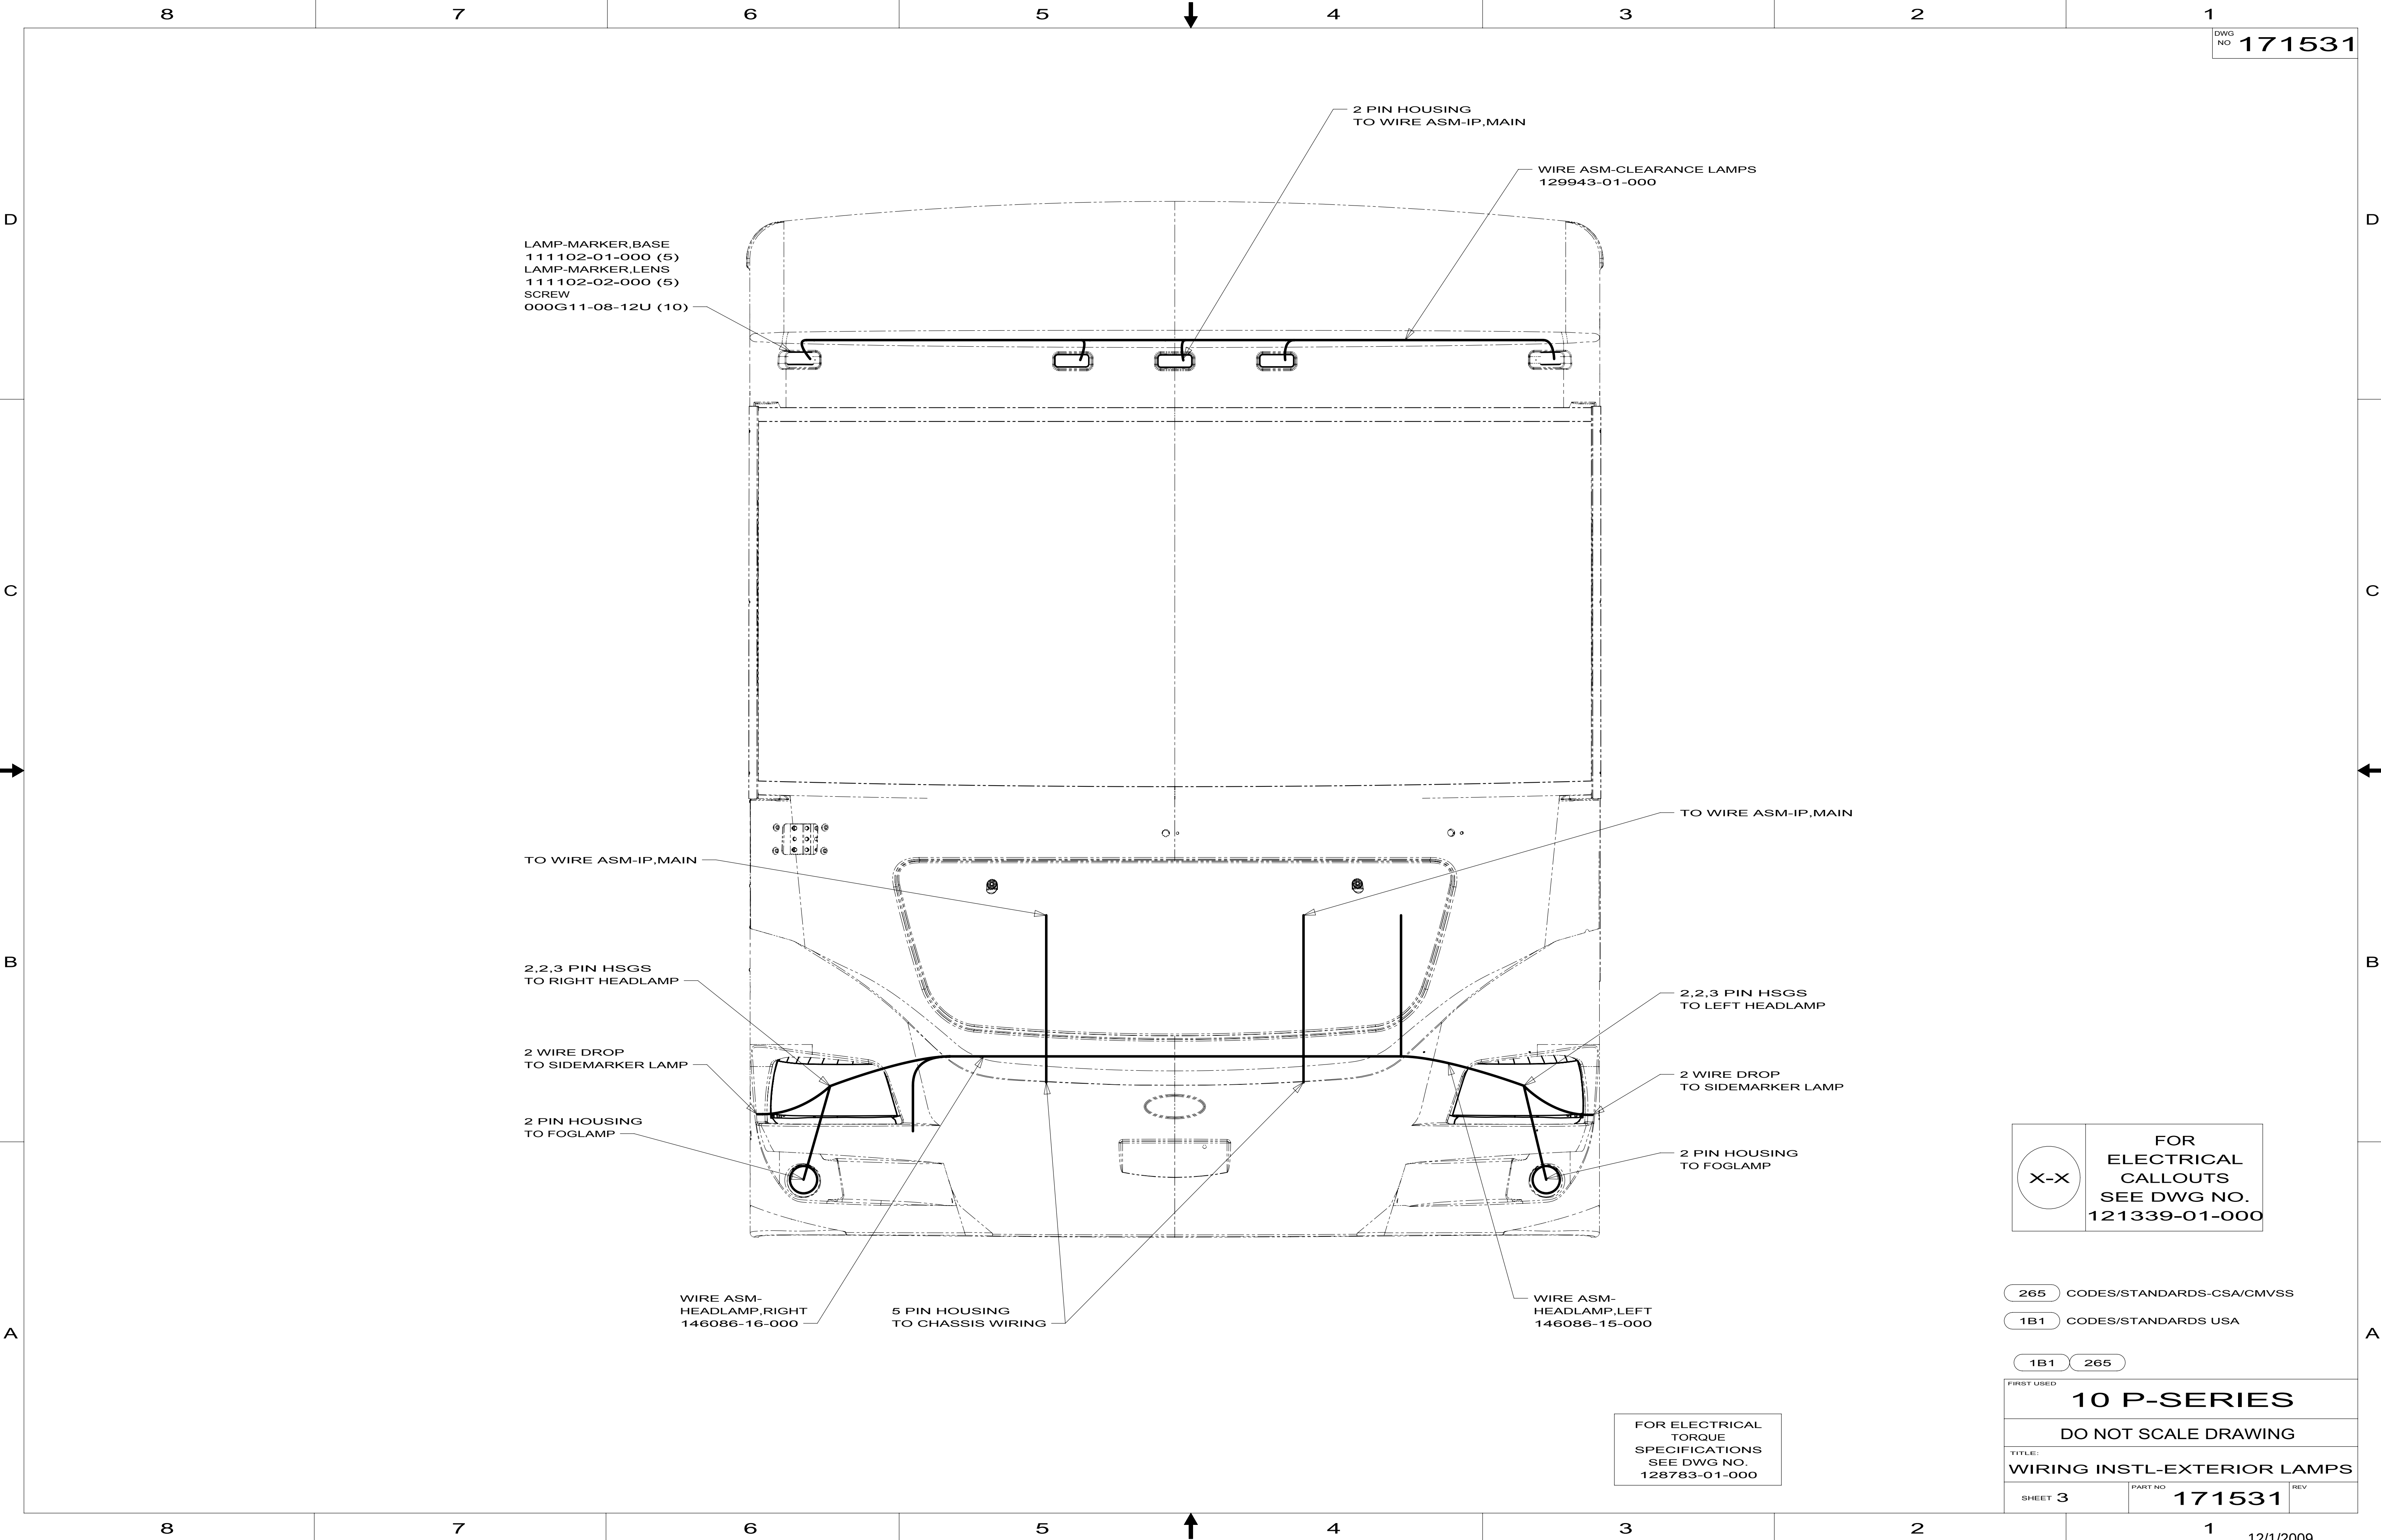REF: 1 12/1/2009





FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-EXTERIOR LAMPS		
SHEET 3	PART NO. 171531	REV

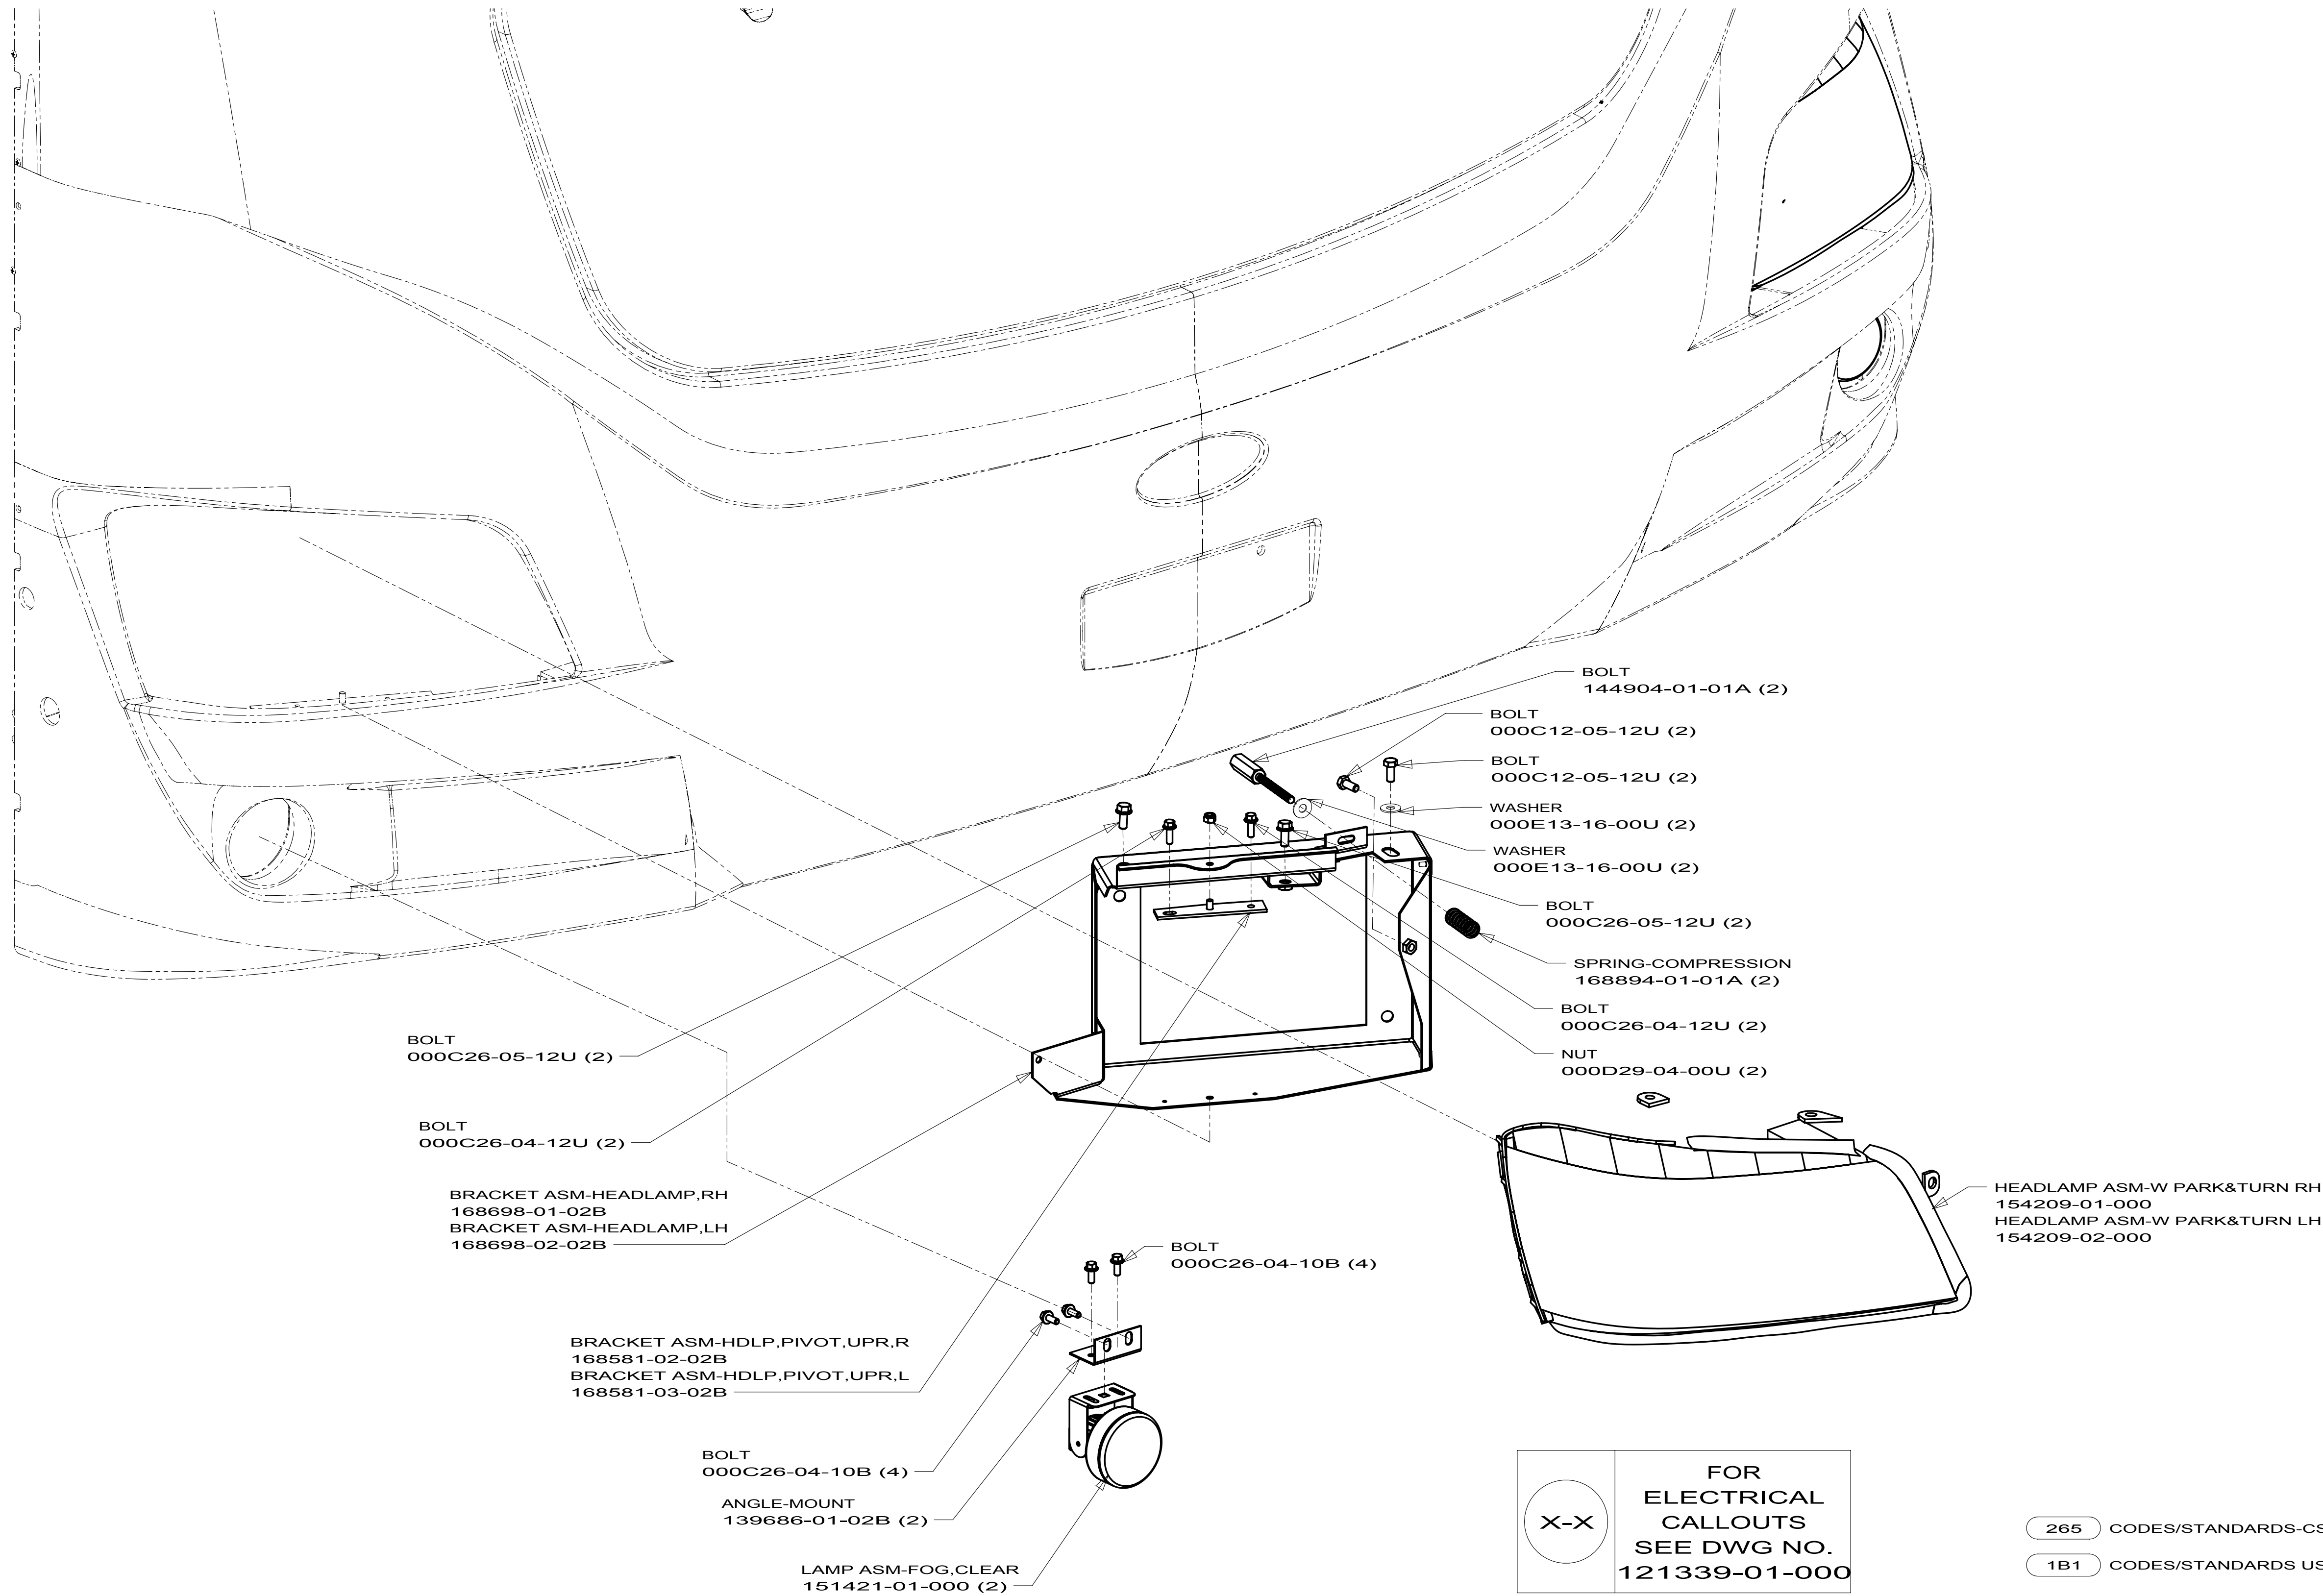FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000



FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA

1B1 265


FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-EXTERIOR LAMPS		
SHEET 4	PART NO. 171531	REV

KEY	PART NUMBER	U/M	DESCRIPTION
	097917-01-700	EA	LENS-LIGHT, CLEAR

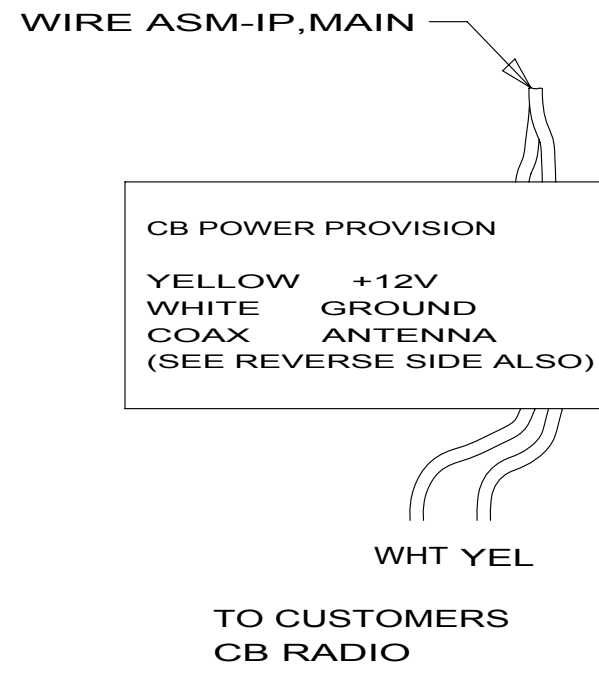
097917-01-08A/09A
VENDOR NO.
30-78-021



LABEL-CB PREP OPTION
104678-01-000



2 PIN HOUSING
(2) BUTT SPLICES



ALARM-JACKS DOWN
160876-01-000

(2) BUTT SPLICES
TO CB PREP
DETAIL BB
(51 BUTT SPLICES
TO BRAKE CONTROLLER)
DETAIL BC

RING TERMINALS
TO GROUND STUD

3 PIN HOUSING
TO WIRE ASM-REAR MONITOR

2 & 6 PIN HOUSINGS
TO LEFT MIRROR

BUTT SPLICE
SPADE TERMINAL
TO 12V RCP

TO SWITCHES
DETAIL EB

9 PIN HSG
TO WIRE ASM-IP,LEFT

2 & 6 PIN HOUSINGS
TO HEATER/AC CONTROLS

15 PIN HSG
TO WIRE ASM-IP,RIGHT

15 PIN HSG
TO WIRE ASM-IP,POD

TO RADIO WIRING

DETAIL BA

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

579 RADIO - CB WIRE PREP

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

10 P-SERIES

DO NOT SCALE DRAWING

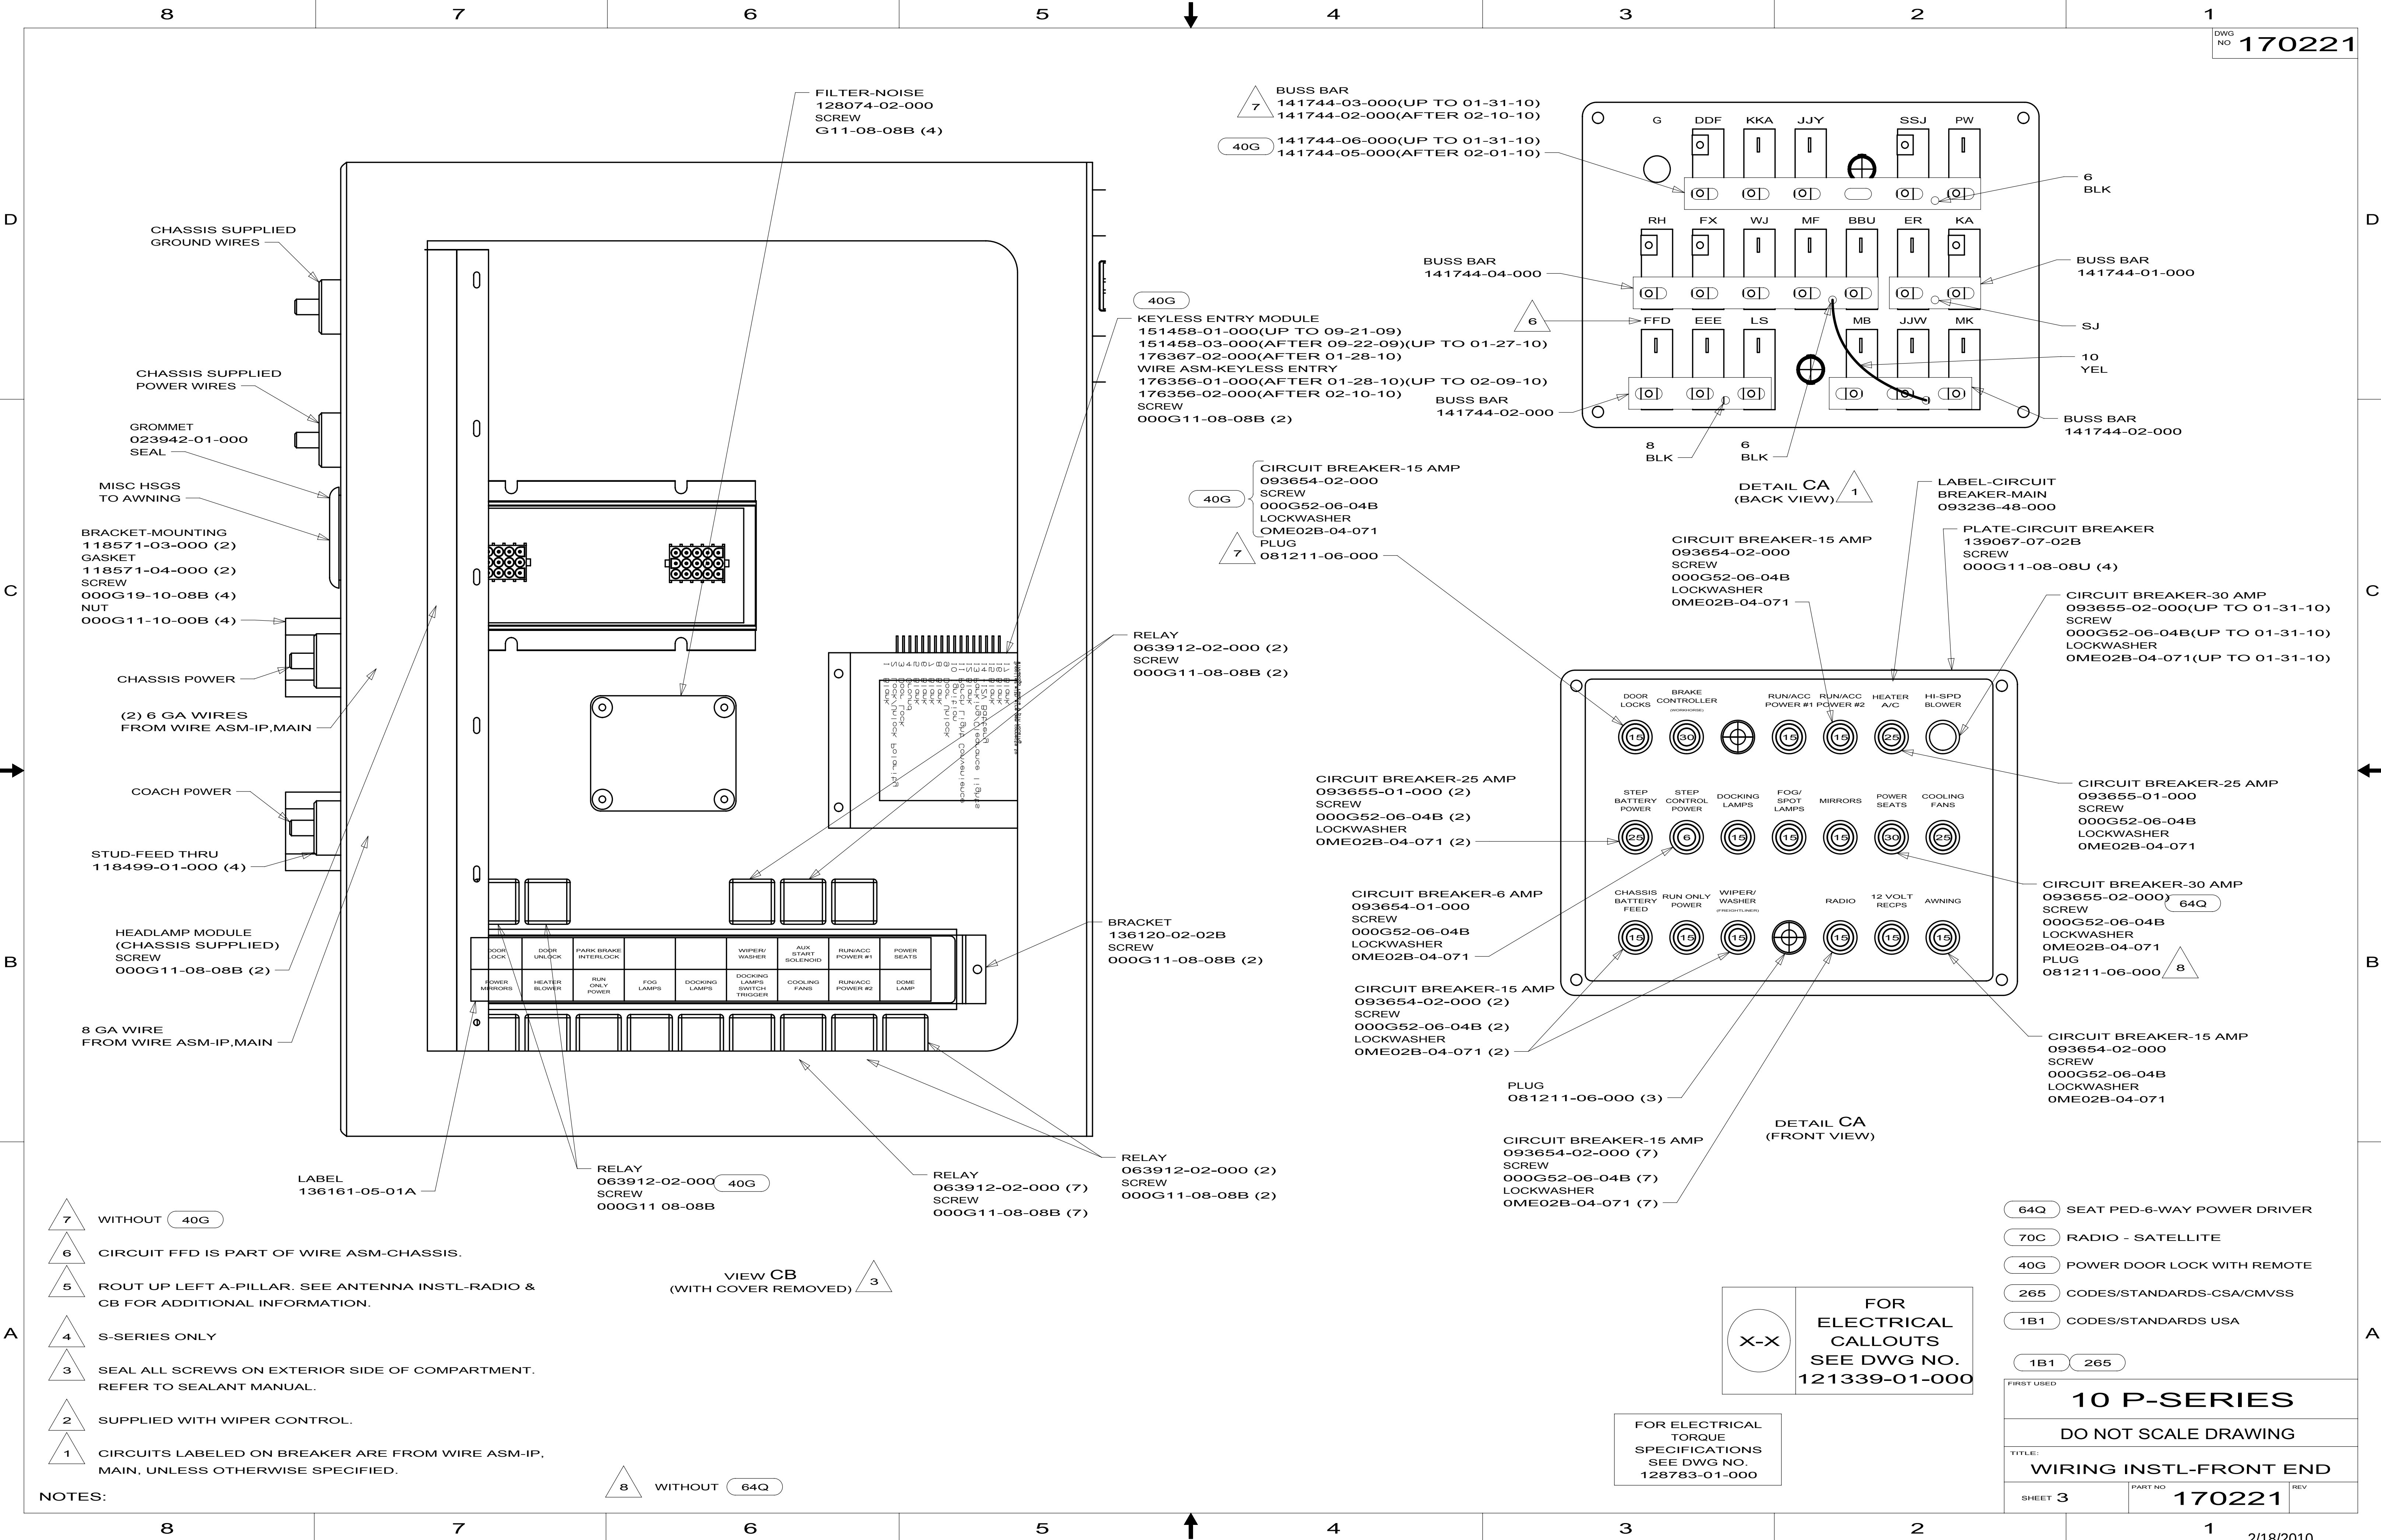
TITLE:
WIRING INSTL-FRONT END

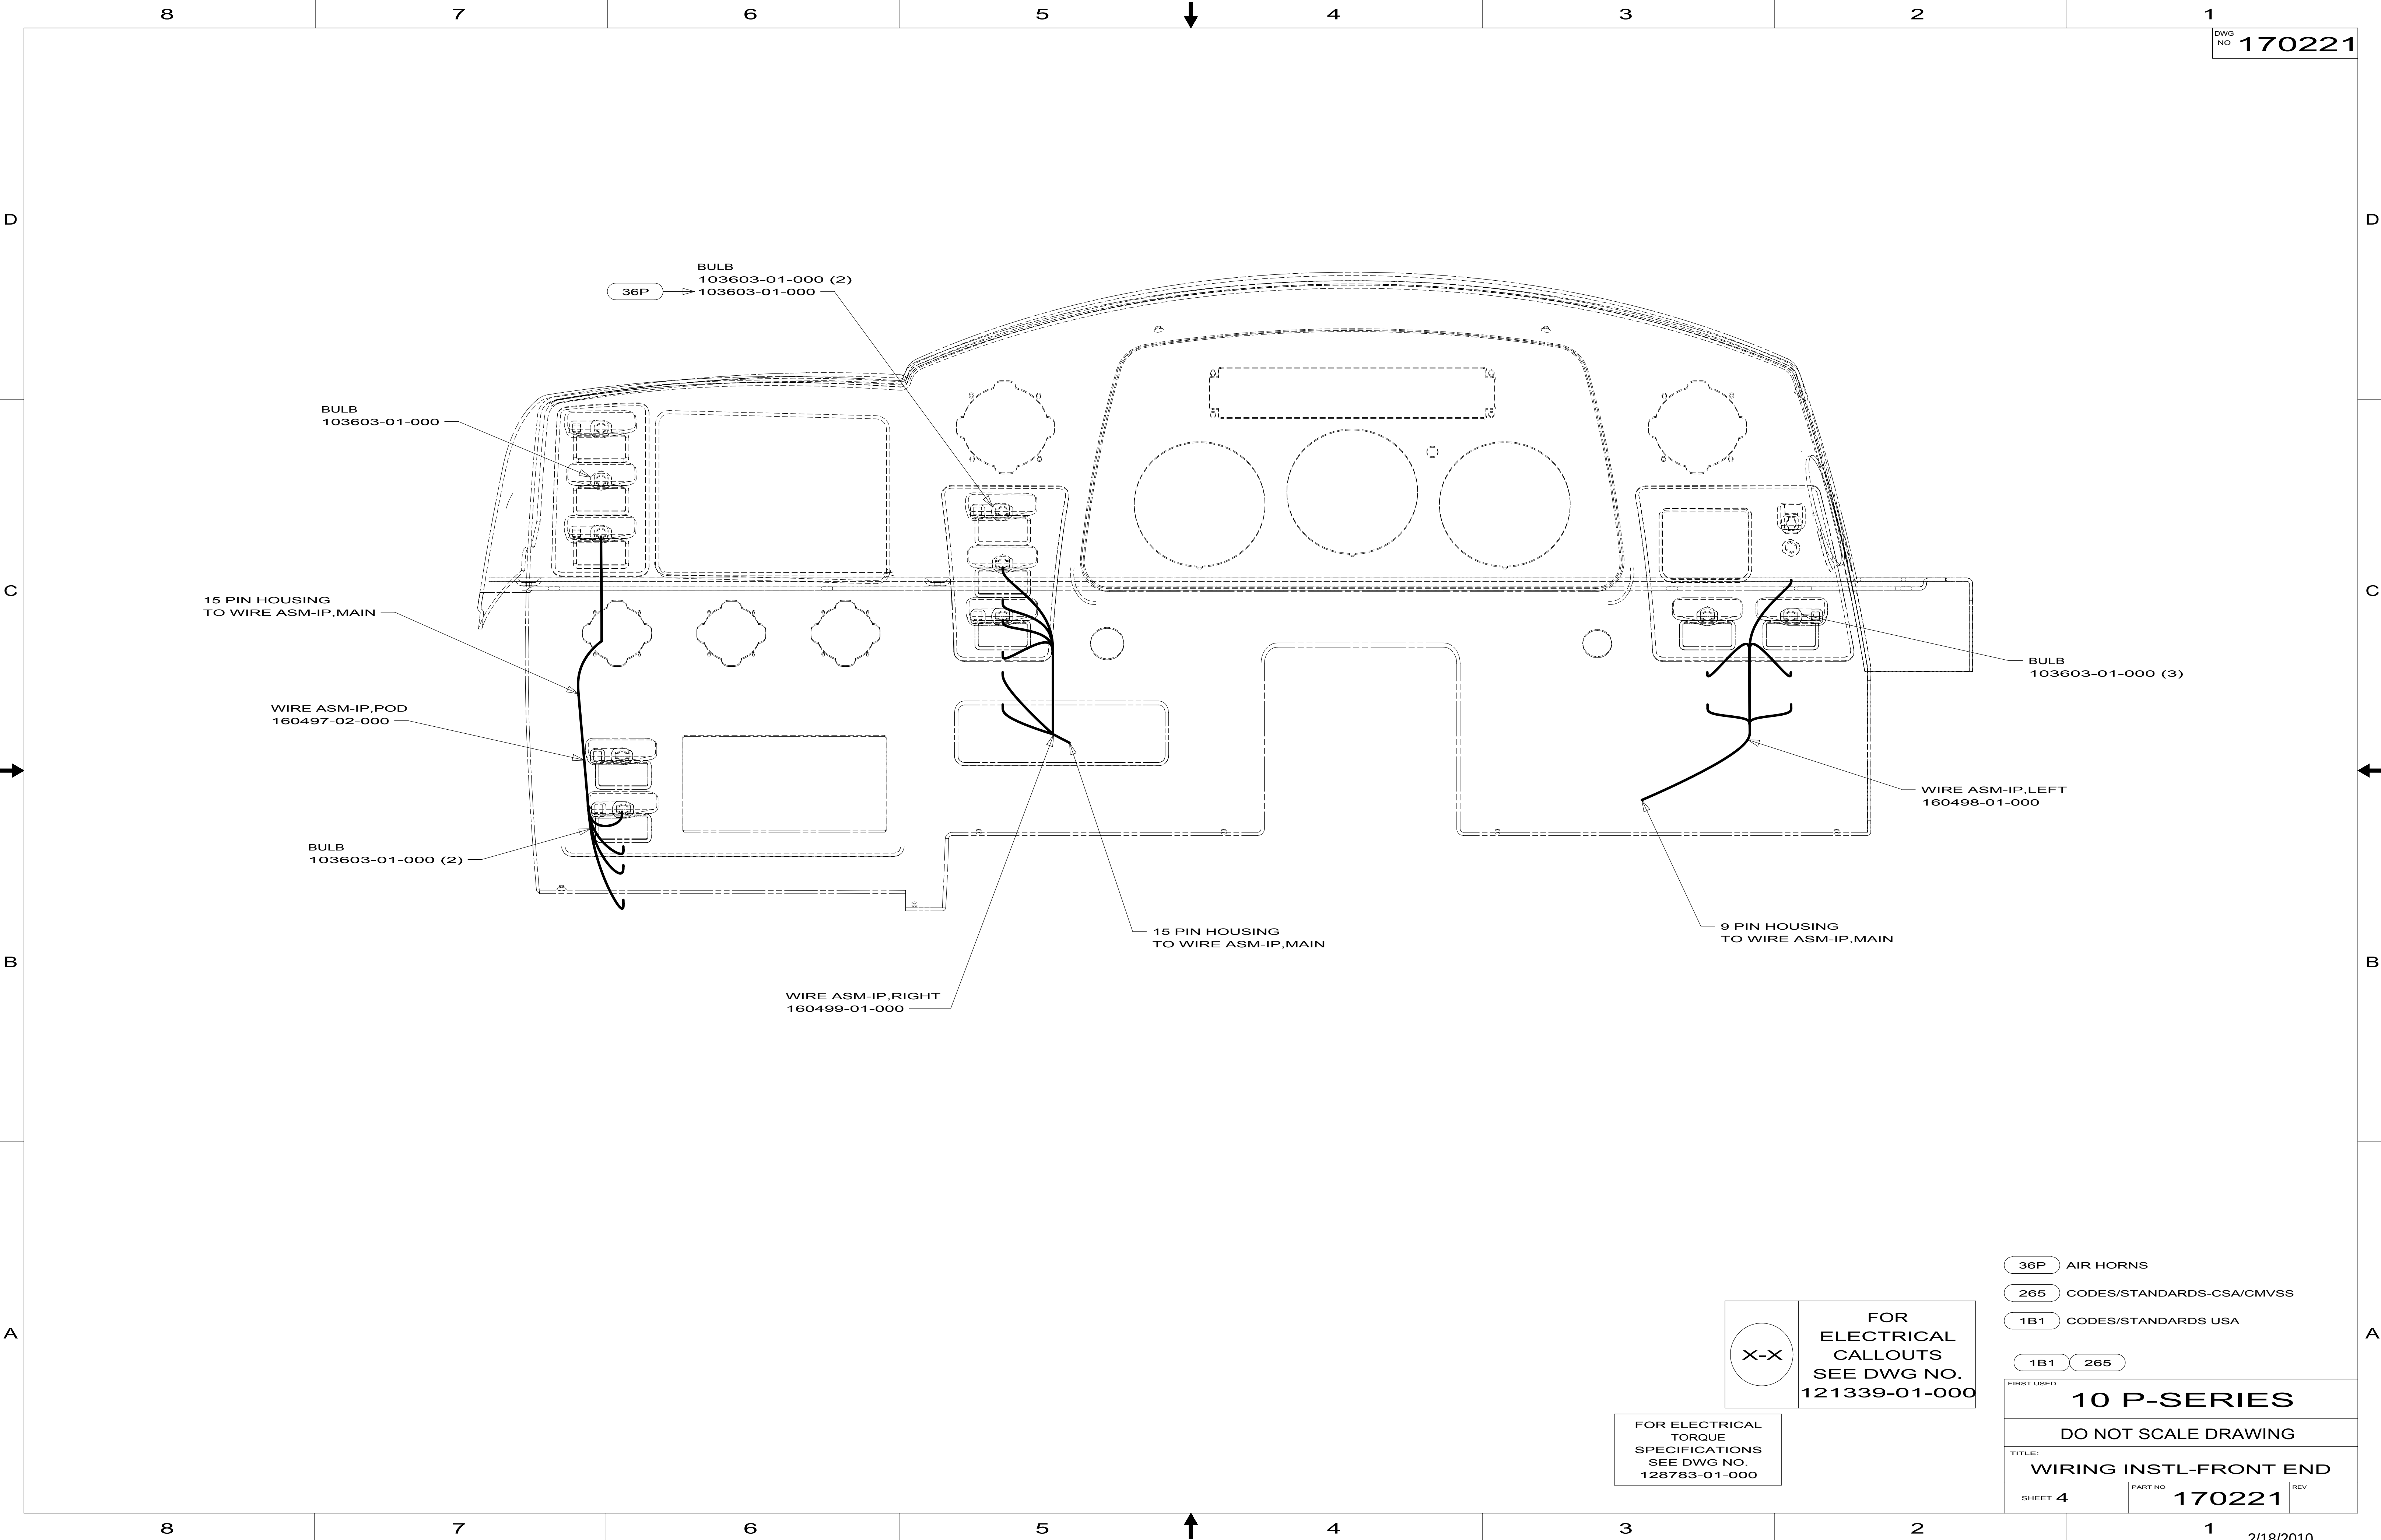
SHEET 2 PART NO 170221 REV

2 EDGE OF LABEL TO HANG JUST BELOW BOTTOM OF DASH.

1 ROUTE WIRES UP LEFT A-PILLAR.

NOTES:







FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- 36P AIR HORNS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 4	PART NO 170221	REV

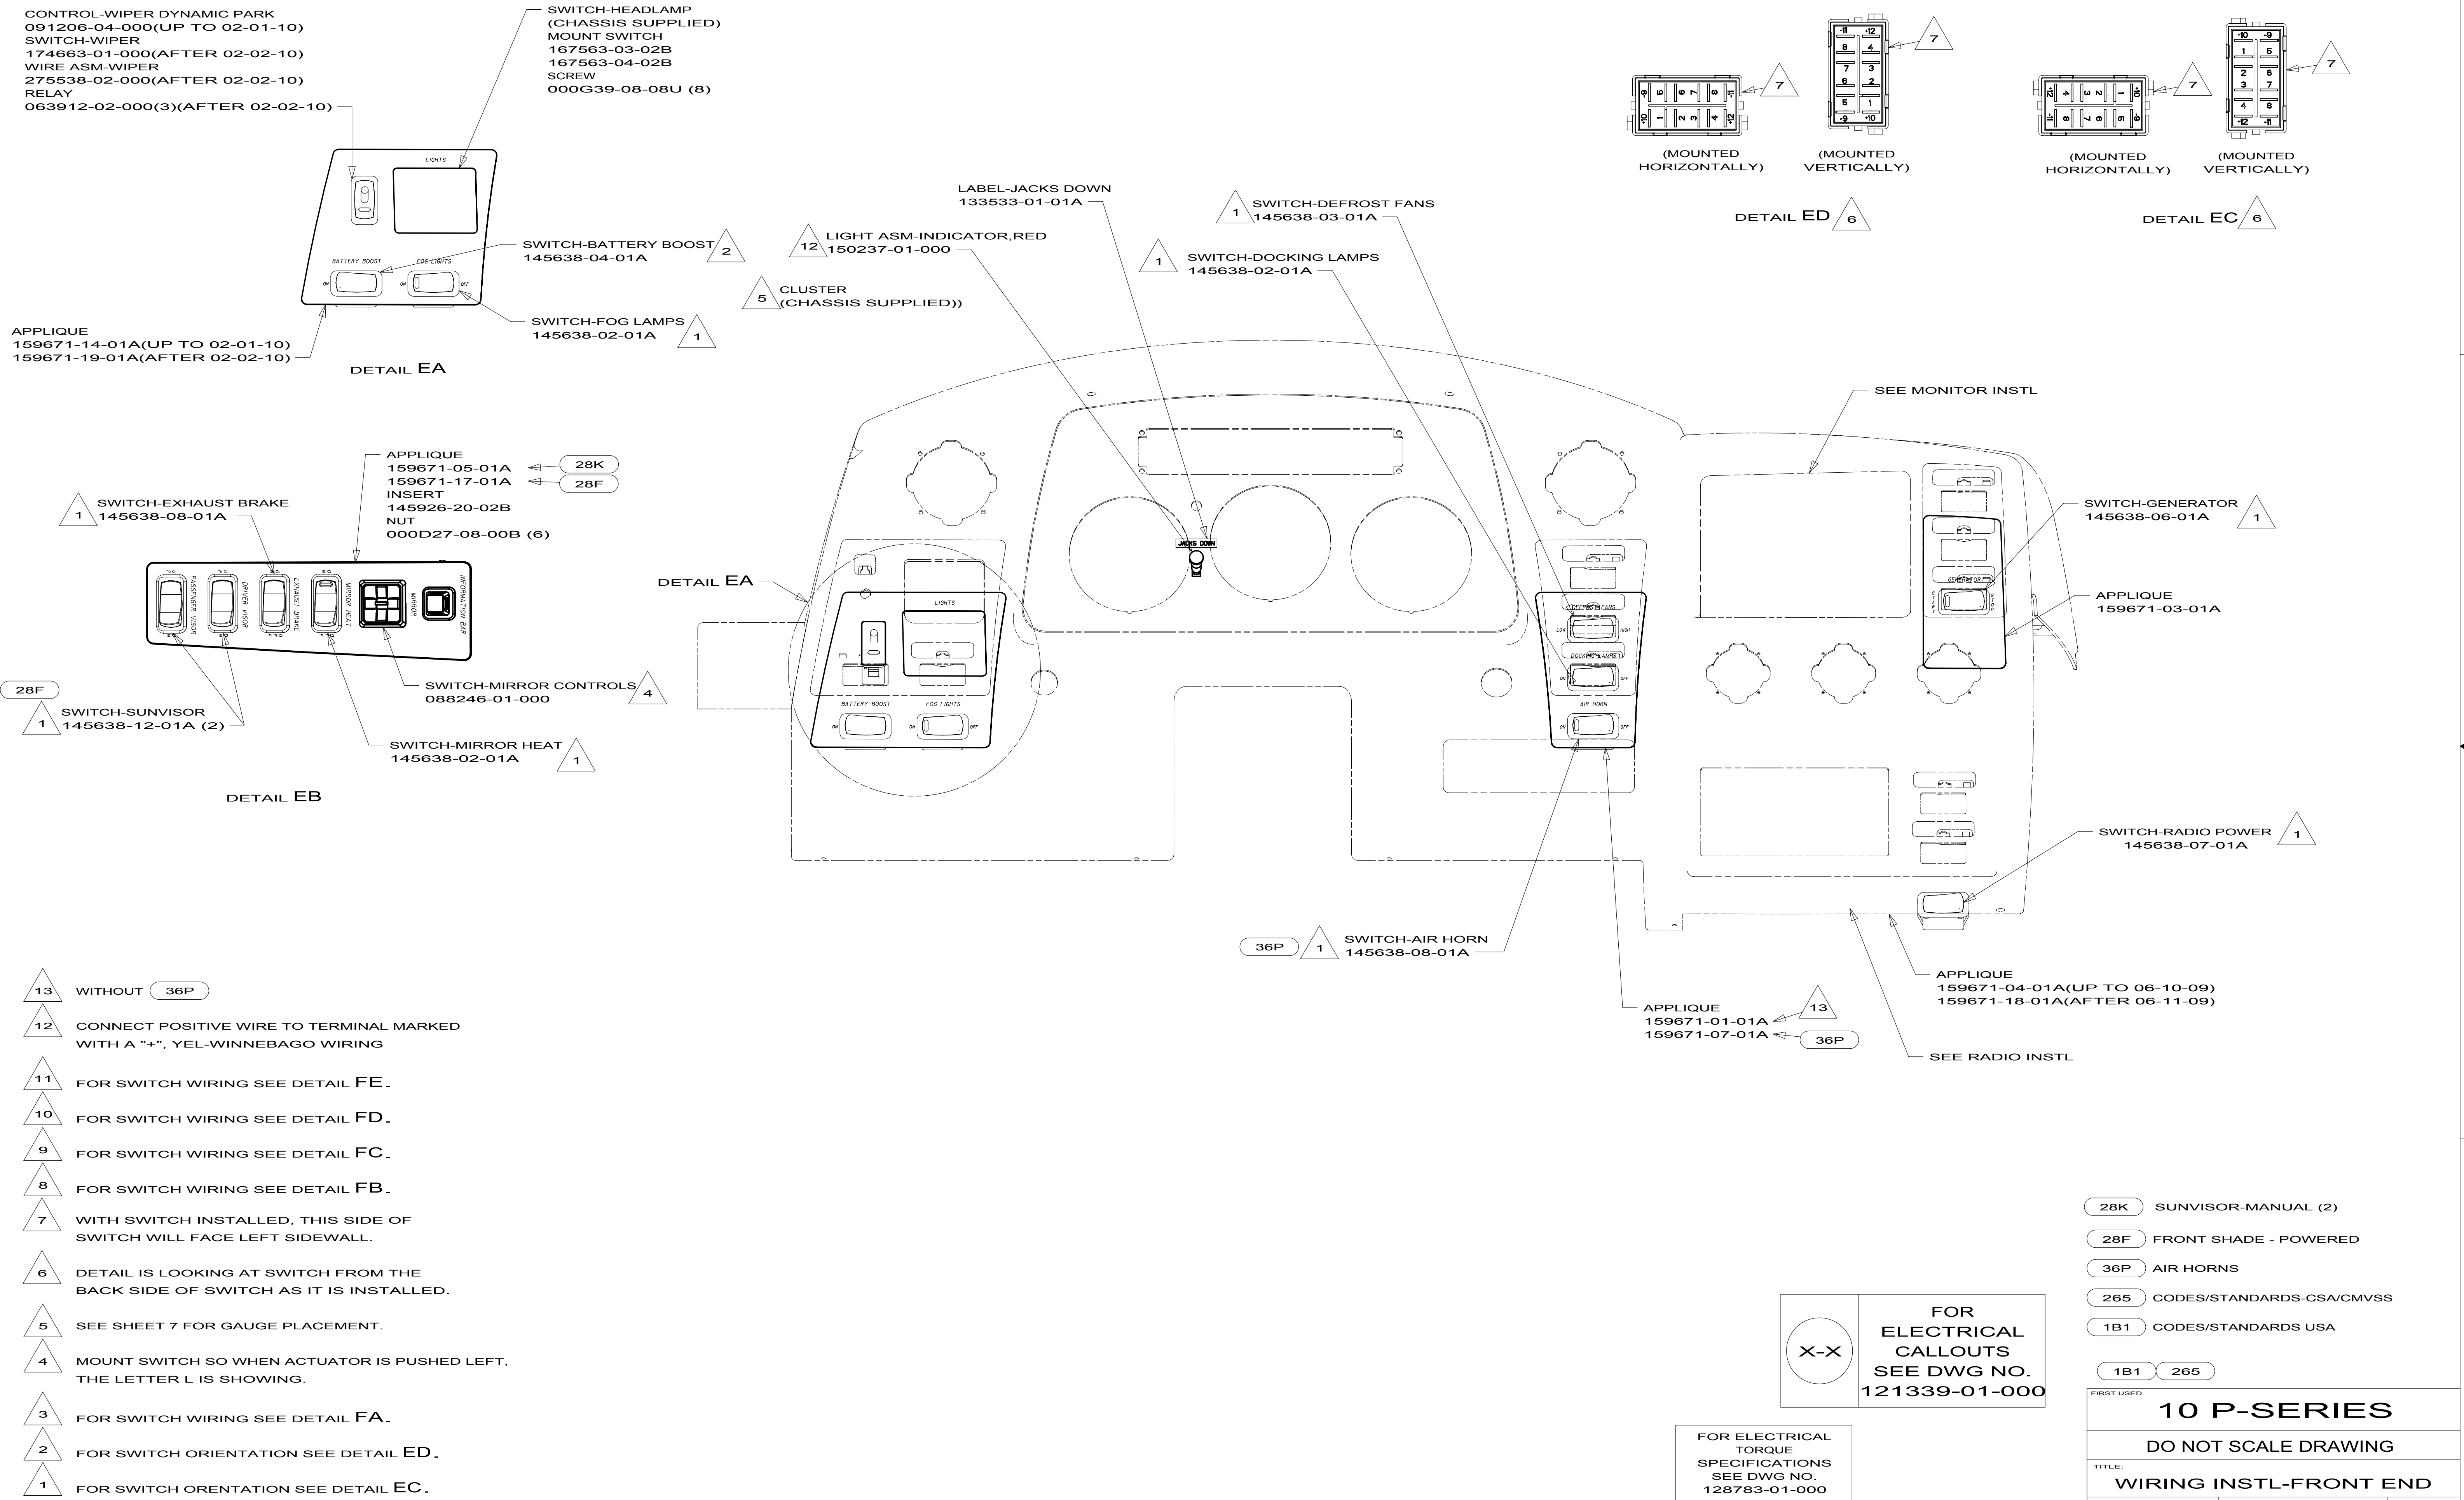

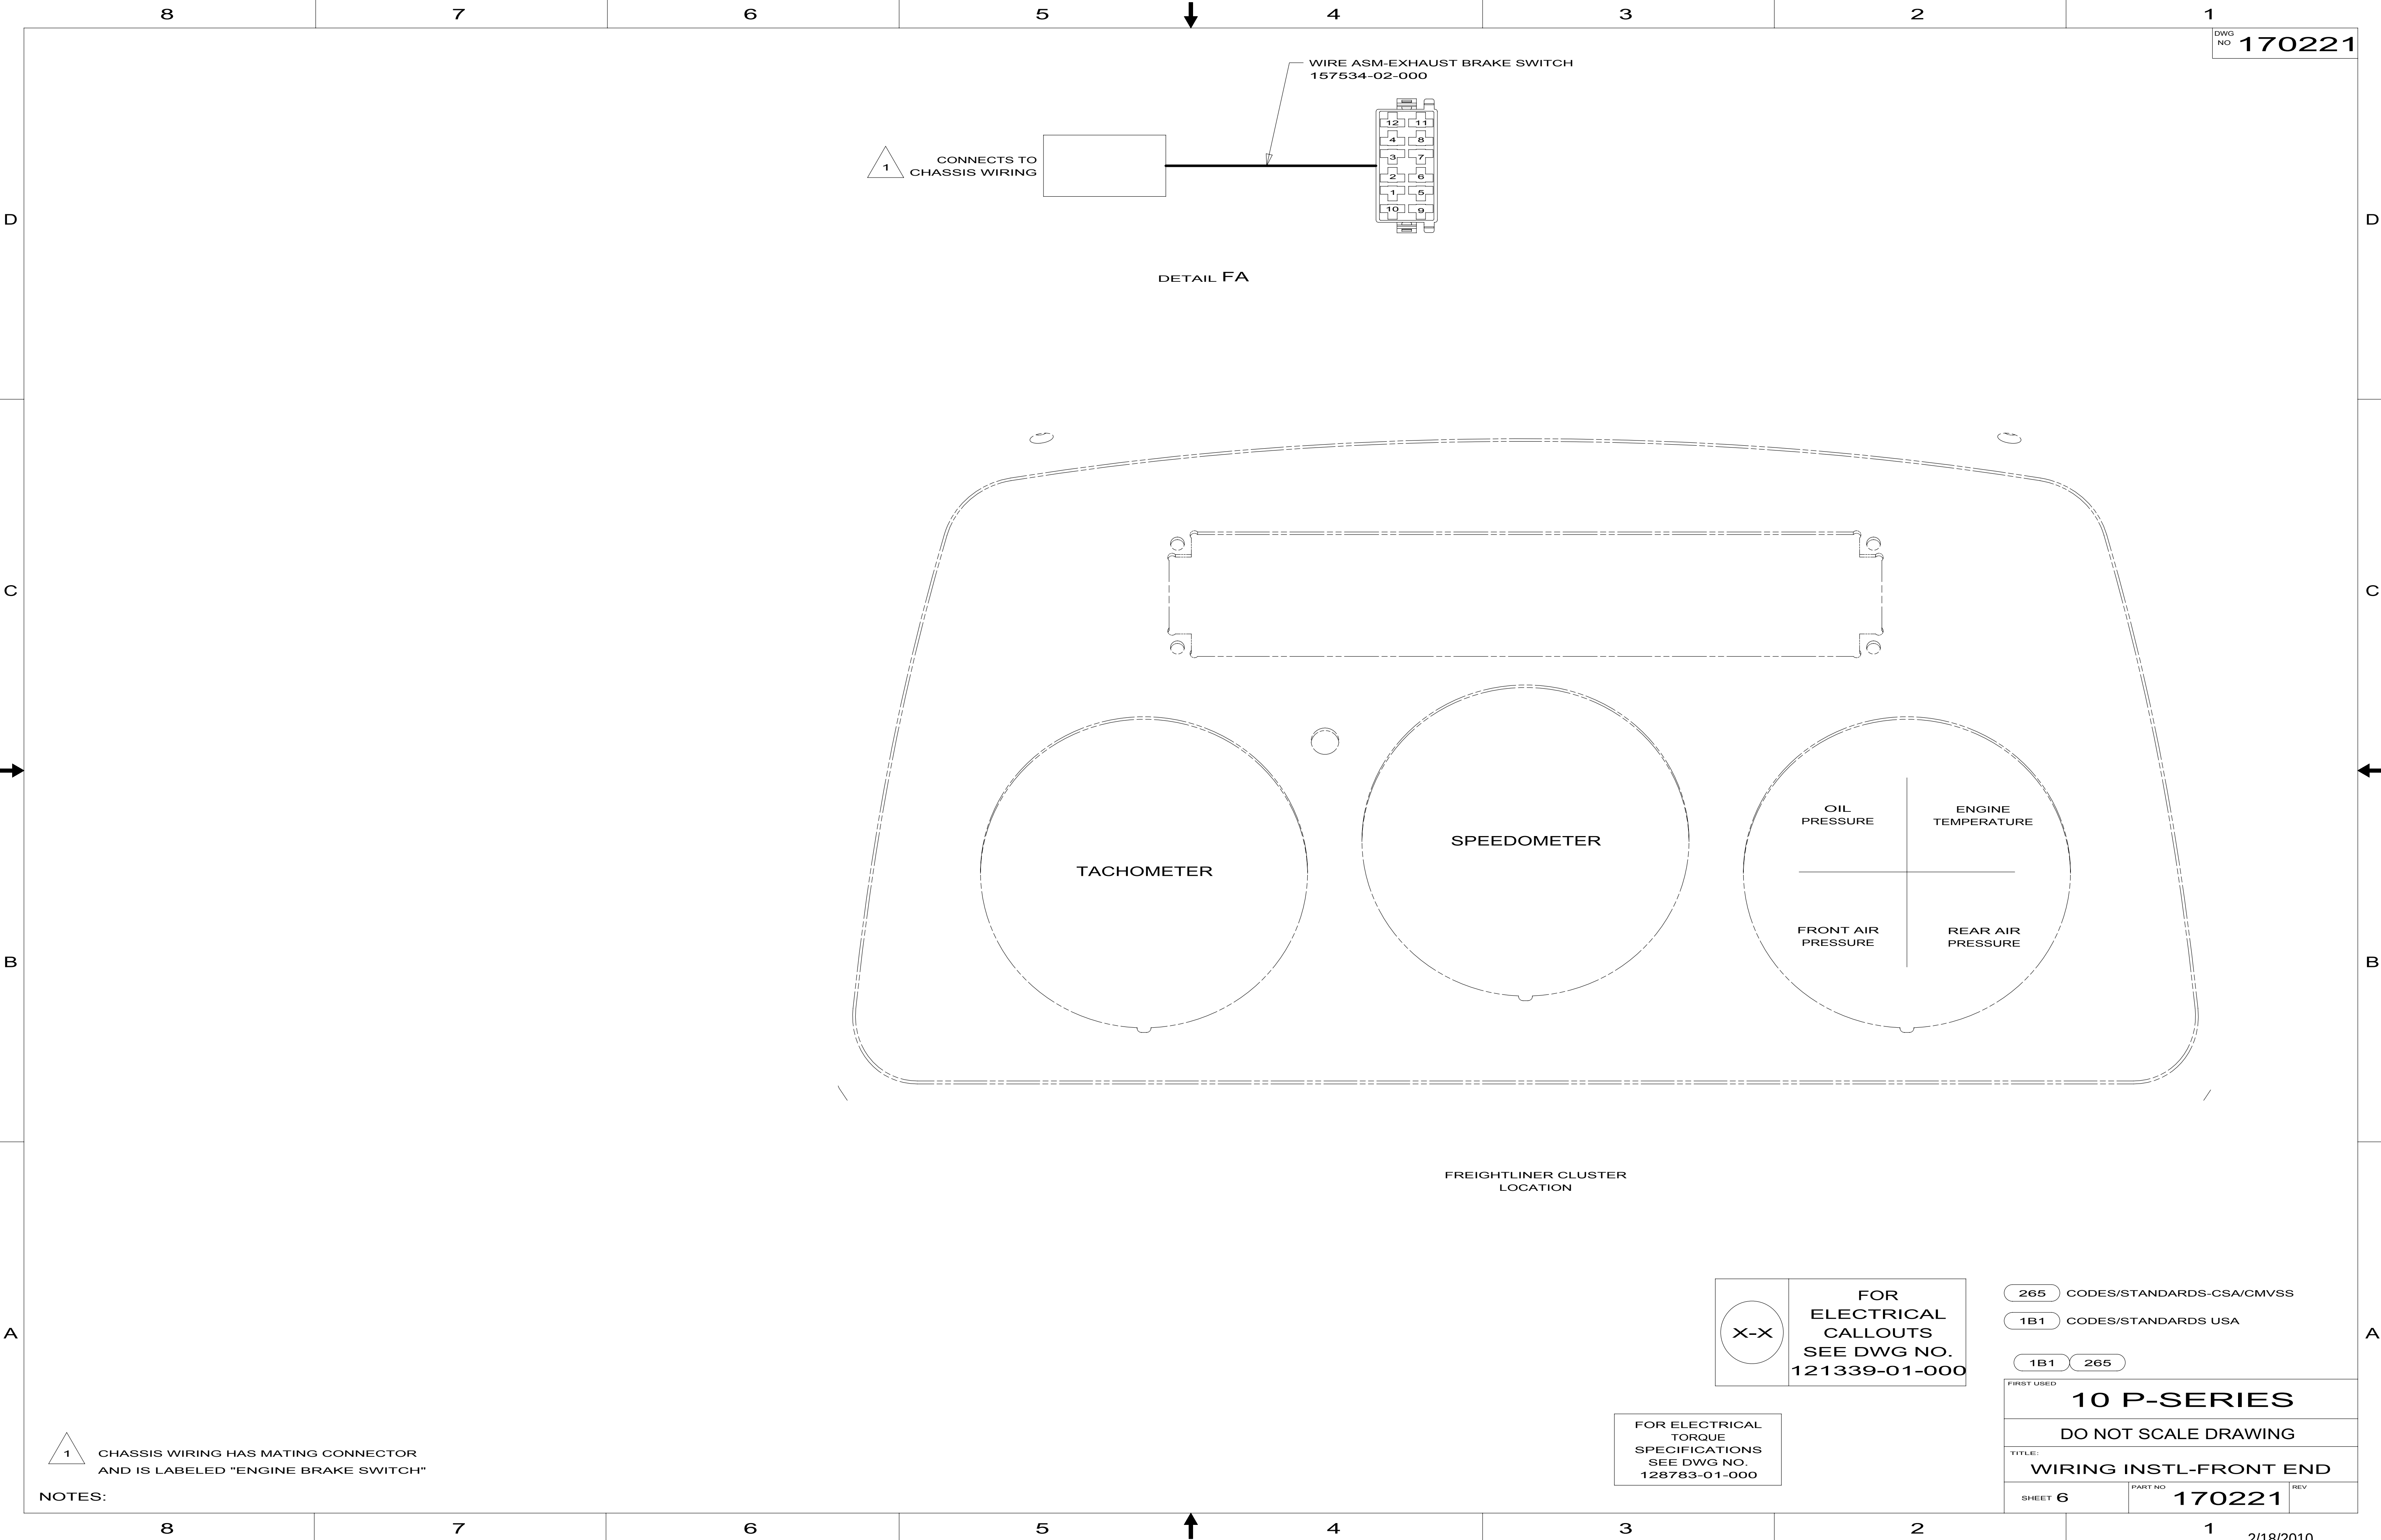

DETAIL FA

FREIGHTLINER CLUSTER LOCATION

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 6	PART NO 170221	REV

NOTES:

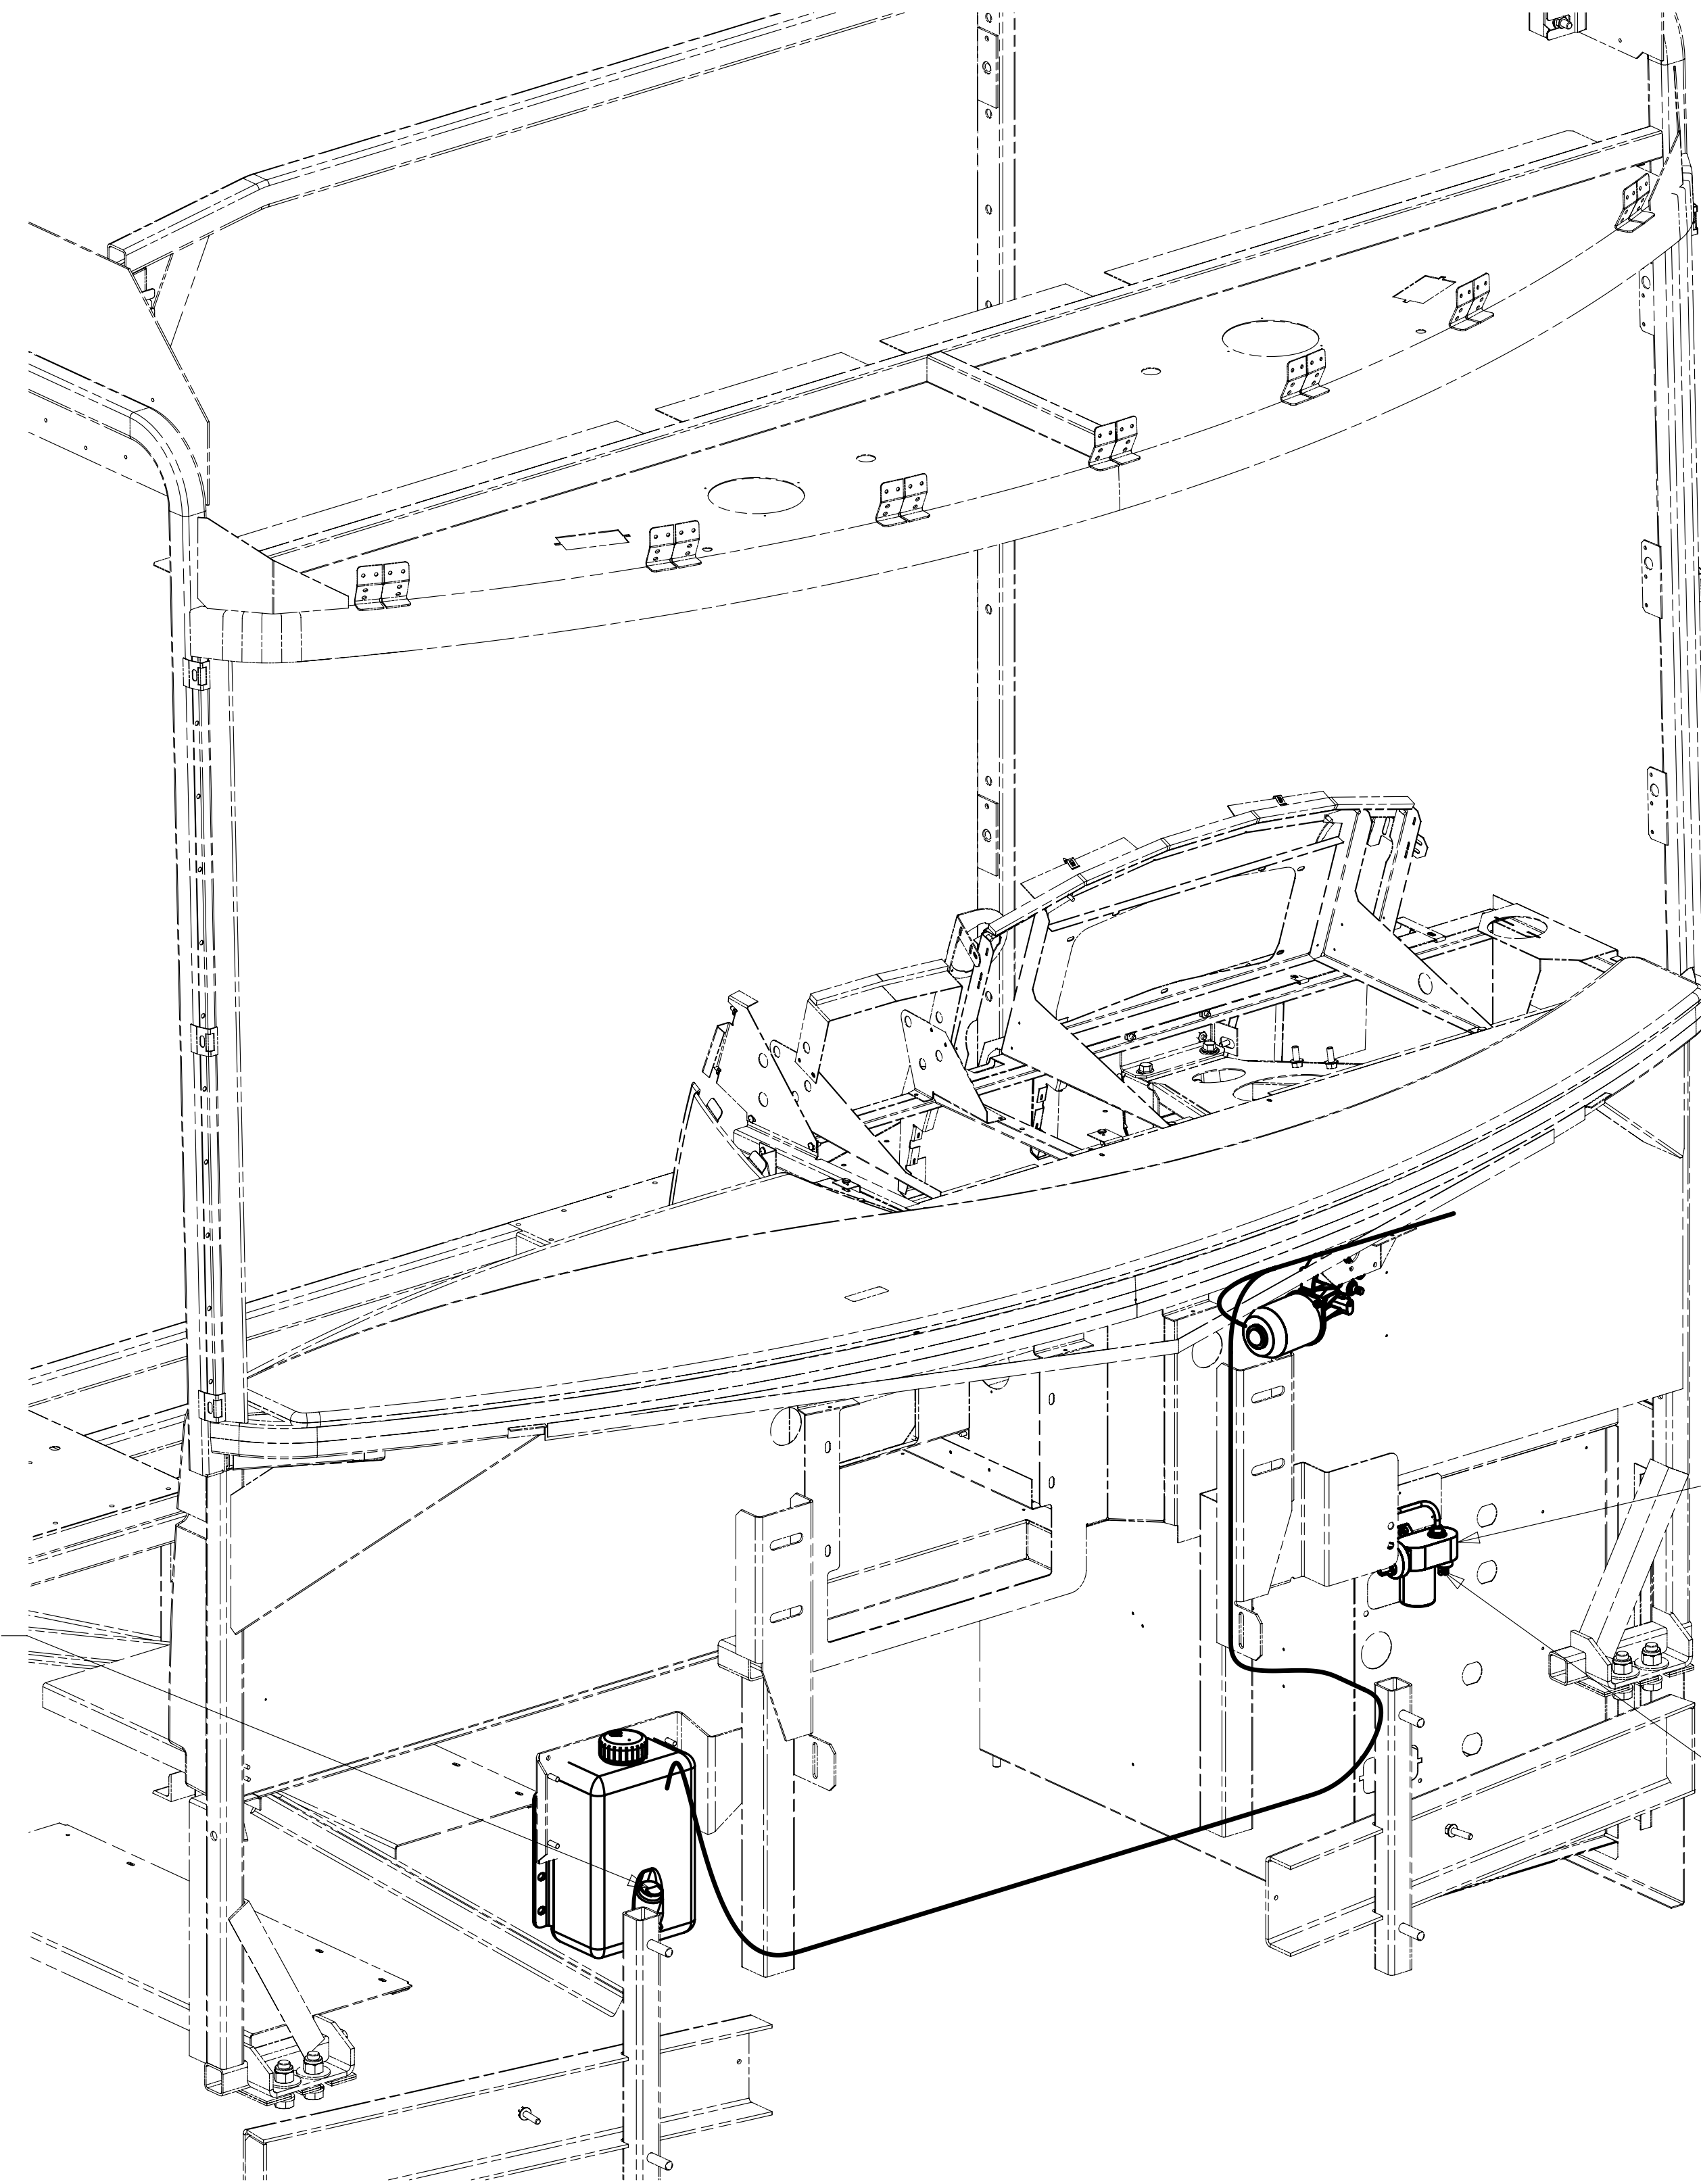1 CHASSIS WIRING HAS MATING CONNECTOR
AND IS LABELED "ENGINE BRAKE SWITCH"



2 PIN HOUSING
TO WASHER BOTTLE

PUMP-VACUUM
114802-01-000
SCREW
000G11-08-12B (3)

2 PIN HOUSING
TO VACUUM PUMP

VIEW GA

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265


FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 7	PART NO. 170221	REV

091206-04-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	091206-02-700	EA KNOB-INNER	66C-00019
	091206-02-701	EA KNOB-OUTER	66C-00020
	091206-04-700	EA SWITCH ASSEM. ONLY	250-6623
	102362-03-700	EA MODULE-WIPER CONT., DYNAMIC	66D-00093

151458-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	102756-02-702	EA BATTERY - 12 VOLT	402-1002
	102756-03-701	EA REMOTE-KEYLESS ENTRY	412-1115
	102756-03-702	EA RELAY- 30AMP - SPDT	463-1000
	151458-01-700	EA MODULE BOARD - 4 FUNCTION	202-3227
	151458-01-701	EA WIRE HARNESS - KEYLESS ENTRY	203-6908

151458-02-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	151458-02-700	EA COVERS (2 PER PKG) F/KEY PAD	208-3896
	151458-02-701	EA GASKET - OUTER - F/KEYPAD	308-2094

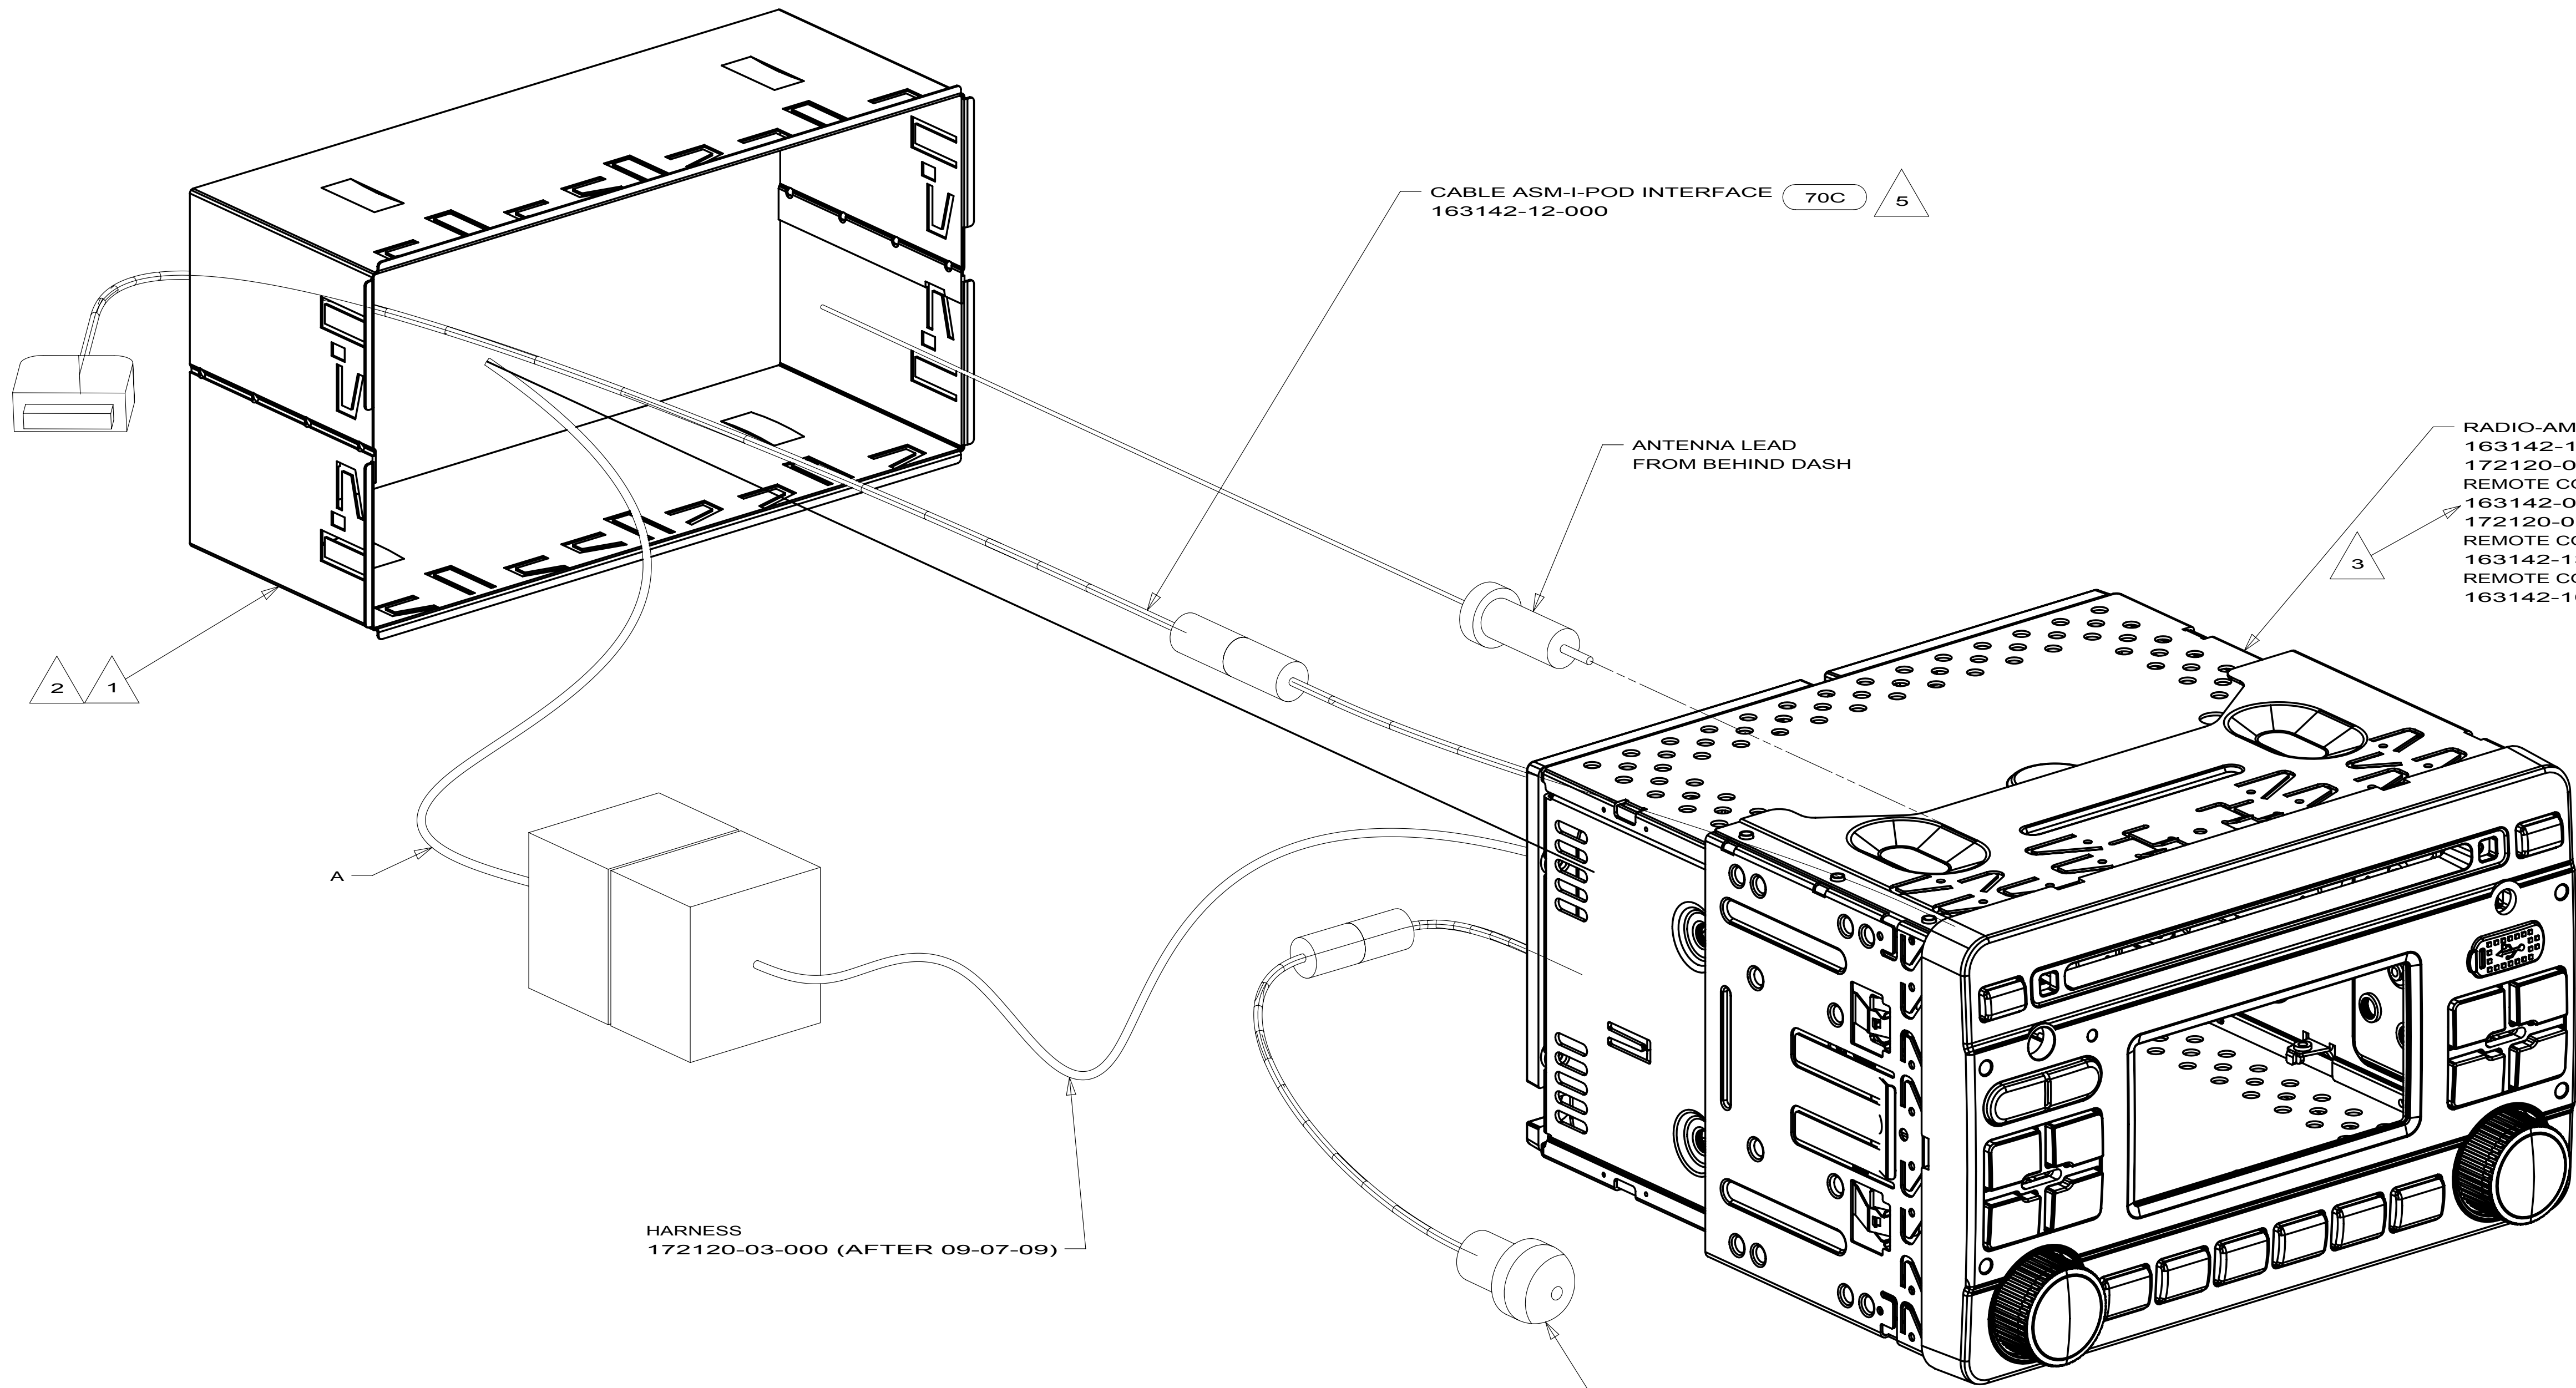J-SERIES
P-SERIES
R-SERIES
169847-04



- 7 FORD CHASSIS.
6 WORKHORSE AND FREIGHTLINER CHASSIS.
5 PLUG I-POD CABLE INTO LEAD ON BACK OF RADIO MARKED 'I-POD'.
ROUTE CABLE UP LEFT A-PILLAR AND INTO OVERHEAD CABINET
ABOVE DRIVER. LEAVE 600 MM OF CABLE IN OVERHEAD TIED UP
WITH WIRE TIE 8343-01-000.
4 INSTALL PER DRAWING 170205.
3 TO BE SUPPLIED LOOSE IN WINNEBAGO OWNERS CASE.
2 BEND TABS ON ALL 4 SIDES TO SECURE MOUNTING BRACKET TO DASH OPENING.
1 SUPPLIED WITH RADIO.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 70C RADIO - SATELLITE
19V RADIO-AM/FM STEREO CD PLAYER
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

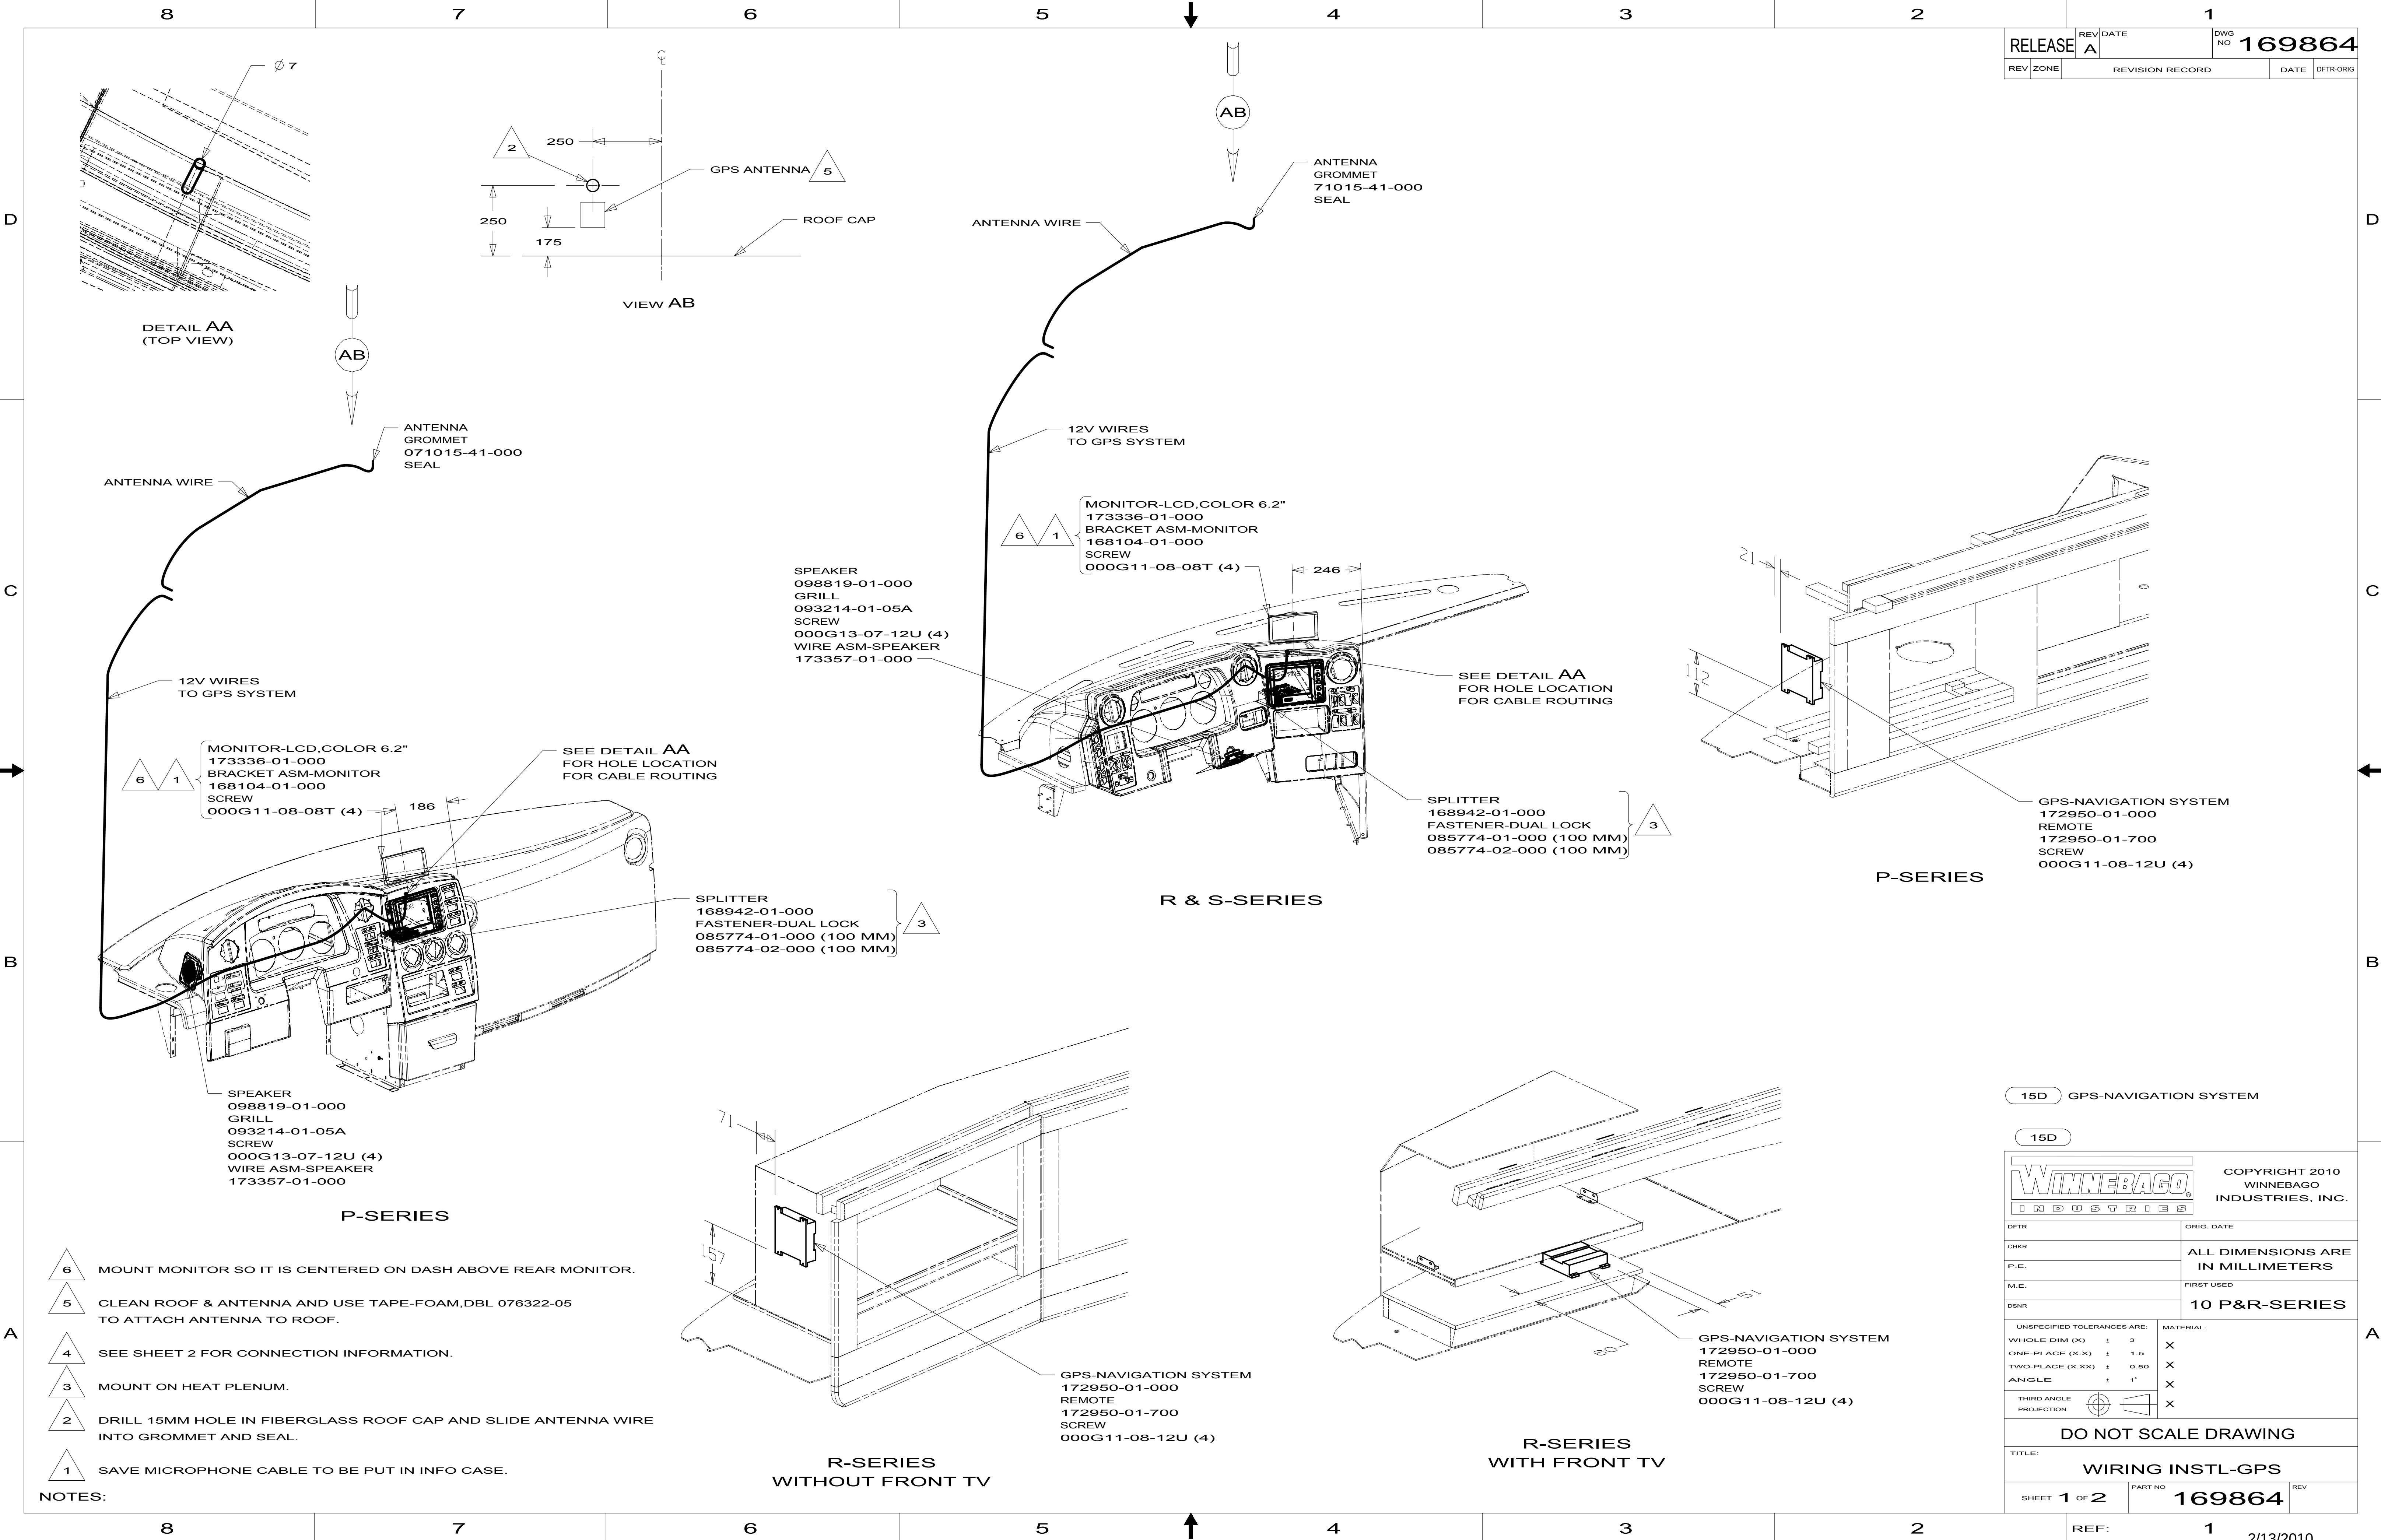
1B1 265 19V

FIRST USED
10 J,P,R-SERIES

DO NOT SCALE DRAWING

TITLE:
RADIO INSTL

SHEET 4 PART NO 169847 REV



15D GPS-NAVIGATION SYSTEM

15D

WINNEBAGO


INDUSTRIES

COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHK-OR	
P.E.	ALL DIMENSIONS ARE IN MILLIMETERS
M.E.	FIRST USED
DSNR	10 P&R-SERIES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	X


DO NOT SCALE DRAWING

TITLE: WIRING INSTL-GPS		
SHEET 1 OF 2	PART NO 169864	REV

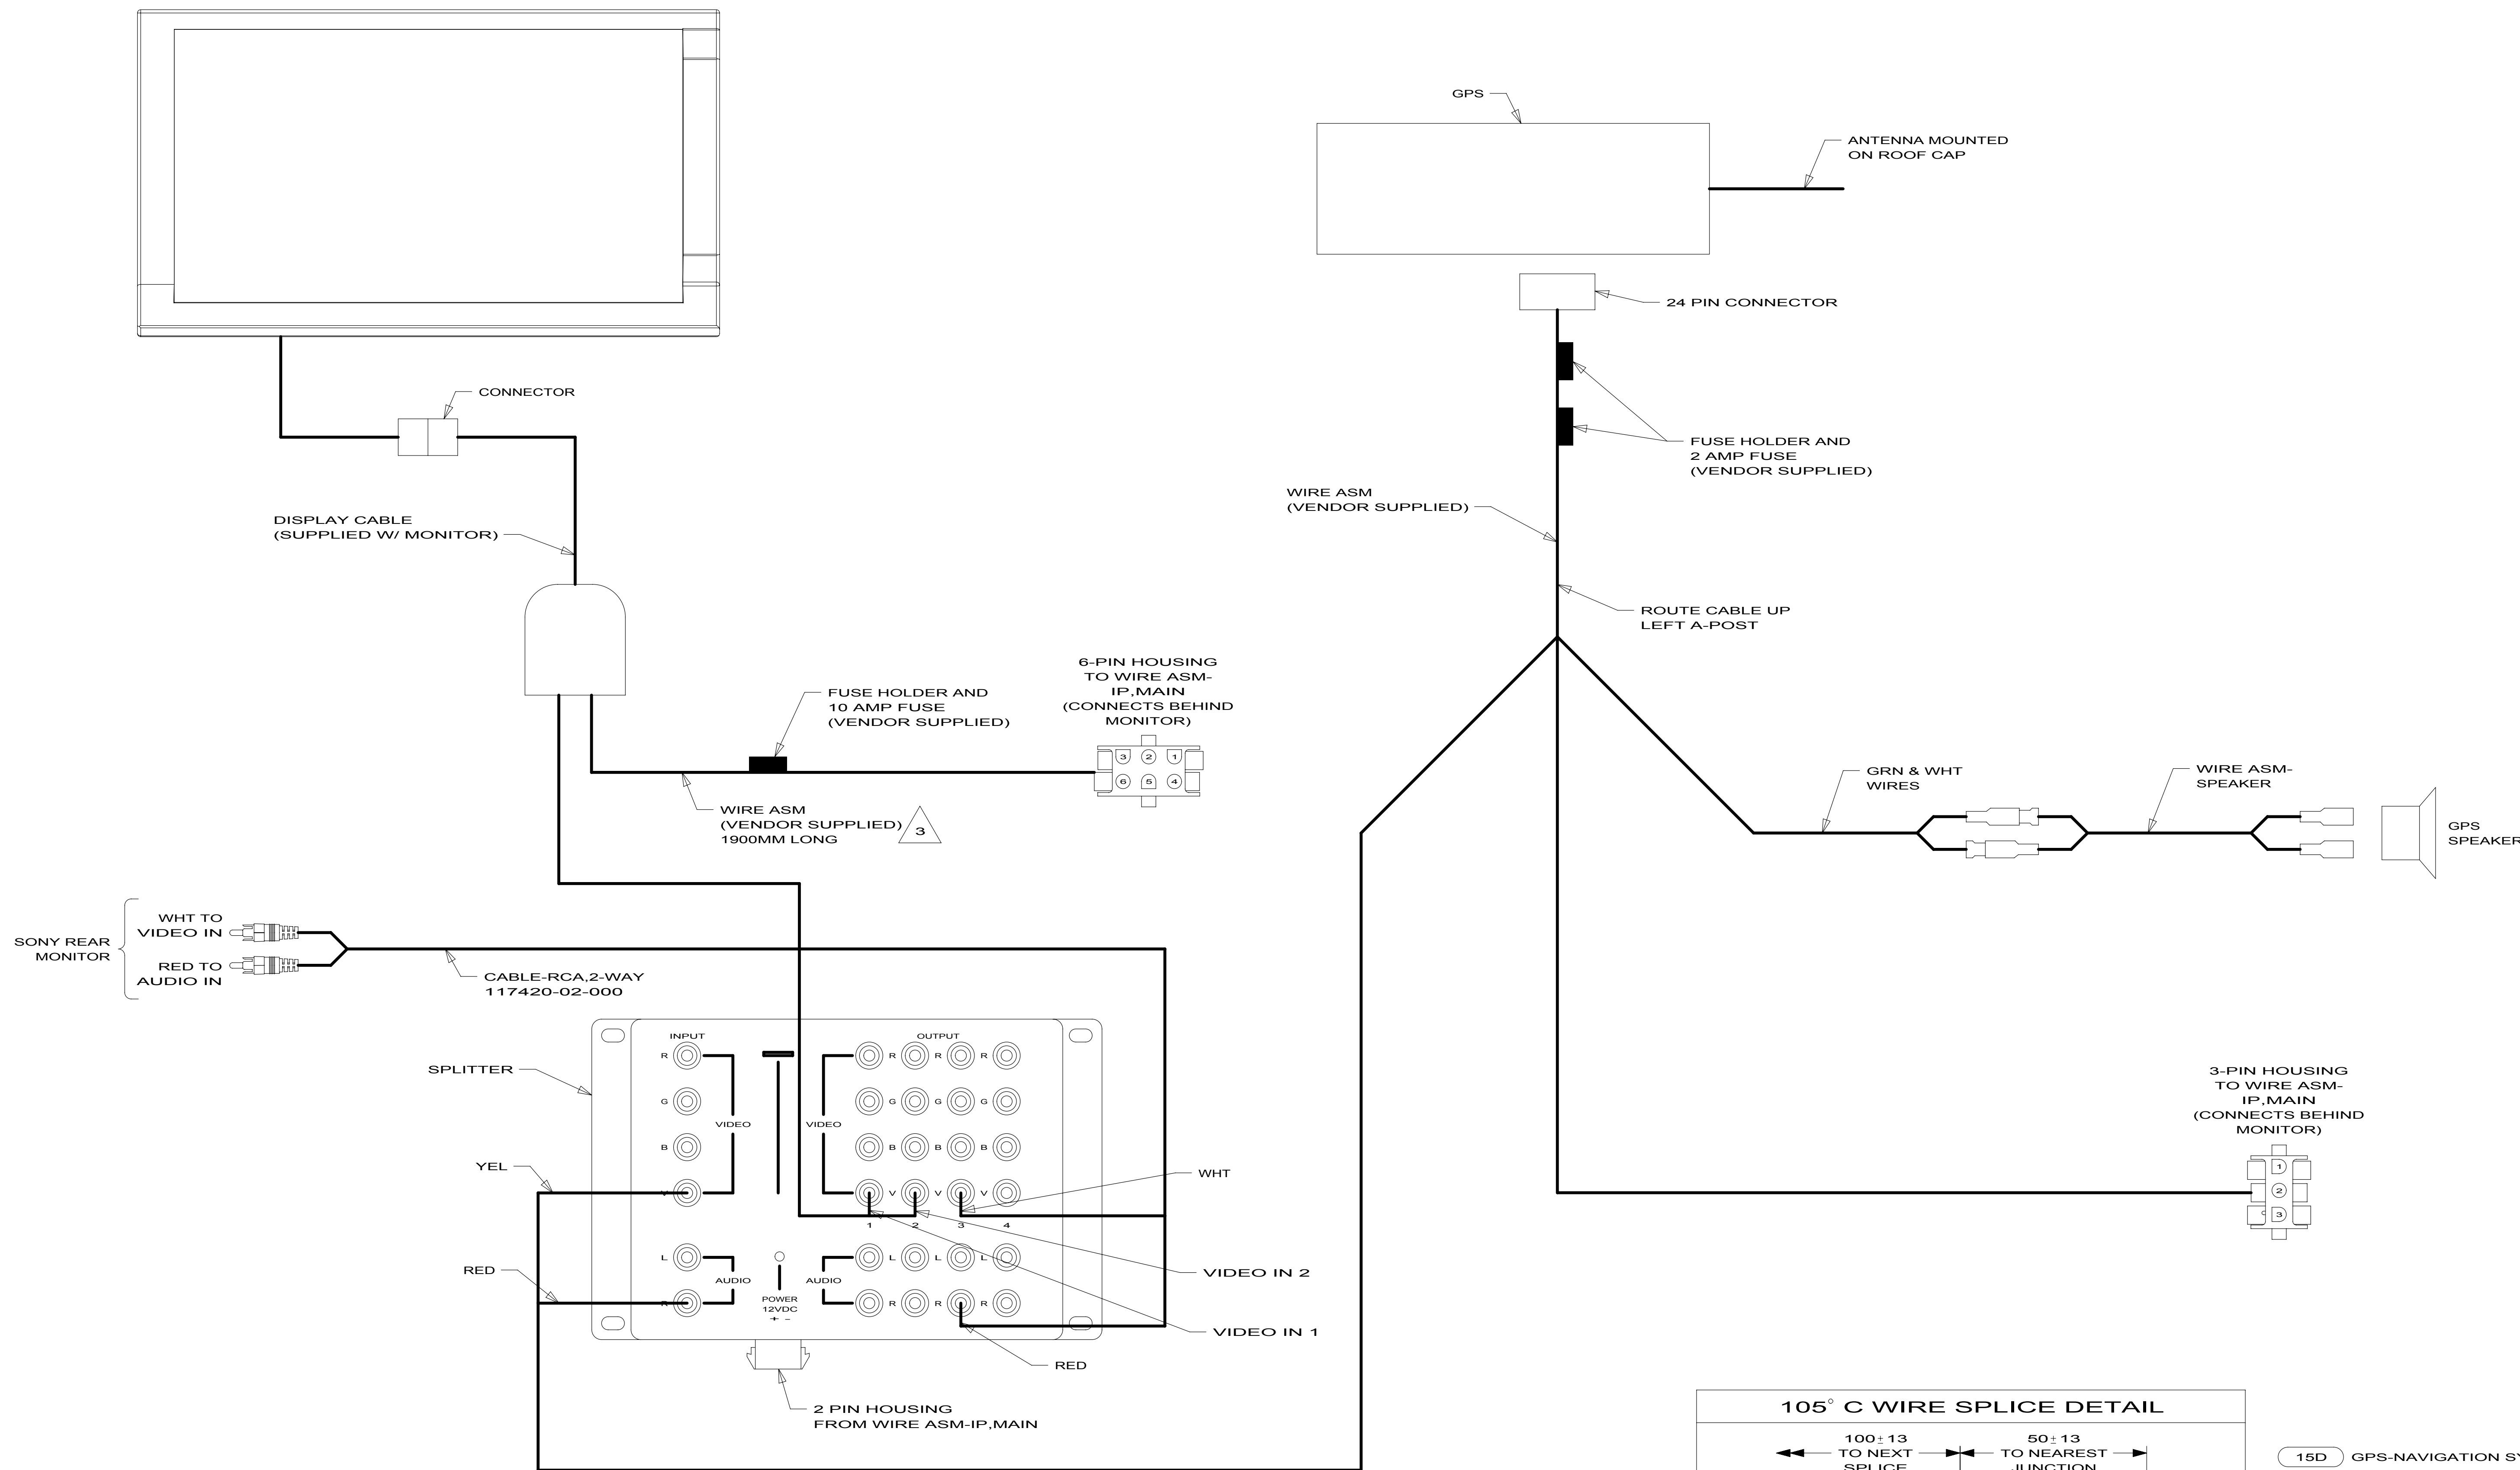

- | | |
|---|---|
| 4 | RCA CABLES ARE NOT USED |
| 3 | CUT WIRE ASM TO AVOID EXCESS WIRE BUNDLING AND TAPE UNUSED WIRES. |
| 2 | CUT TERMINALS FROM VENDOR SUPPLIED WIRES AND SPLICE AS SHOWN. |
| 1 | NOT USED, CUT WIRE AND TIE BACK TO LOOM. |

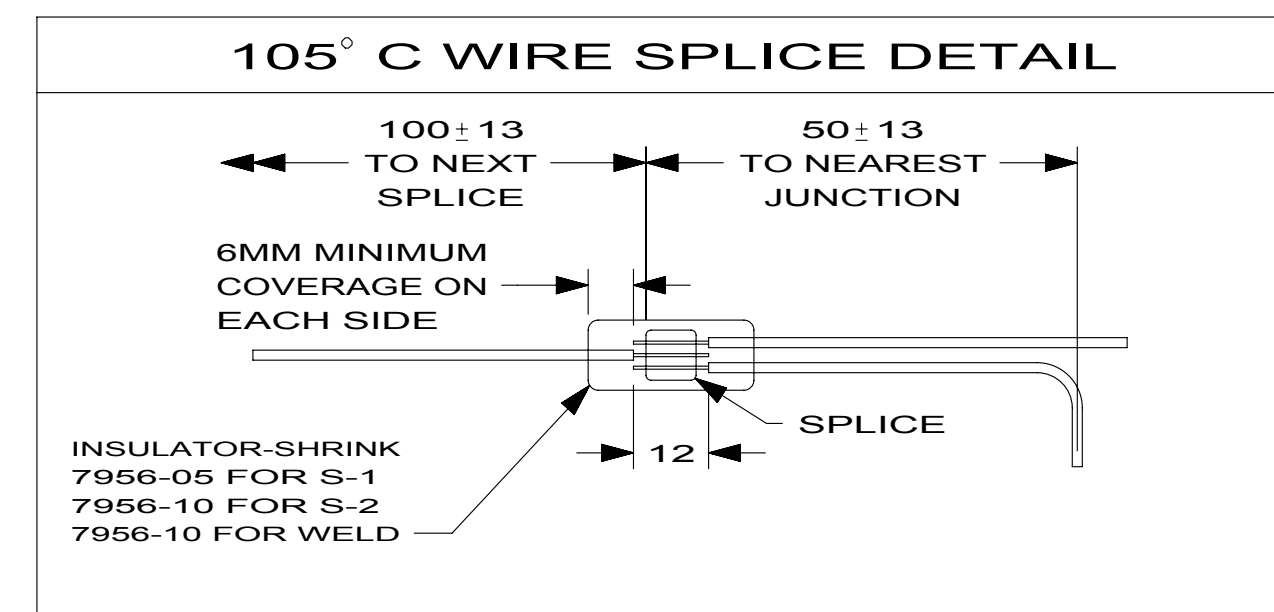NOTES:




GPS-NAVIGATION SYSTEM	
15D	
15D	
FIRST USED	
10 P&R-SERIES	
DO NOT SCALE DRAWING	
TITLE:	
WIRING INSTL-GPS	
SHEET 2	PART NO 169864
	REV

DRAWING NO.	SHEETS
169920-01	1,2A,2B,2C,3,4A,4B,5A,5B
169920-02	1,2A,2B,2C,4A,4B,5A,5B,6A,6B
169920-03	7,8,11,12A,12B,13A,13B
169920-04	9,10,11,12A,12B


P40L
P40T
P39N
P34Y

RELEASE	REV A	DATE	DWG NO	169920
REV	ZONE	REVISION RECORD	DATE	DFT-ORIG

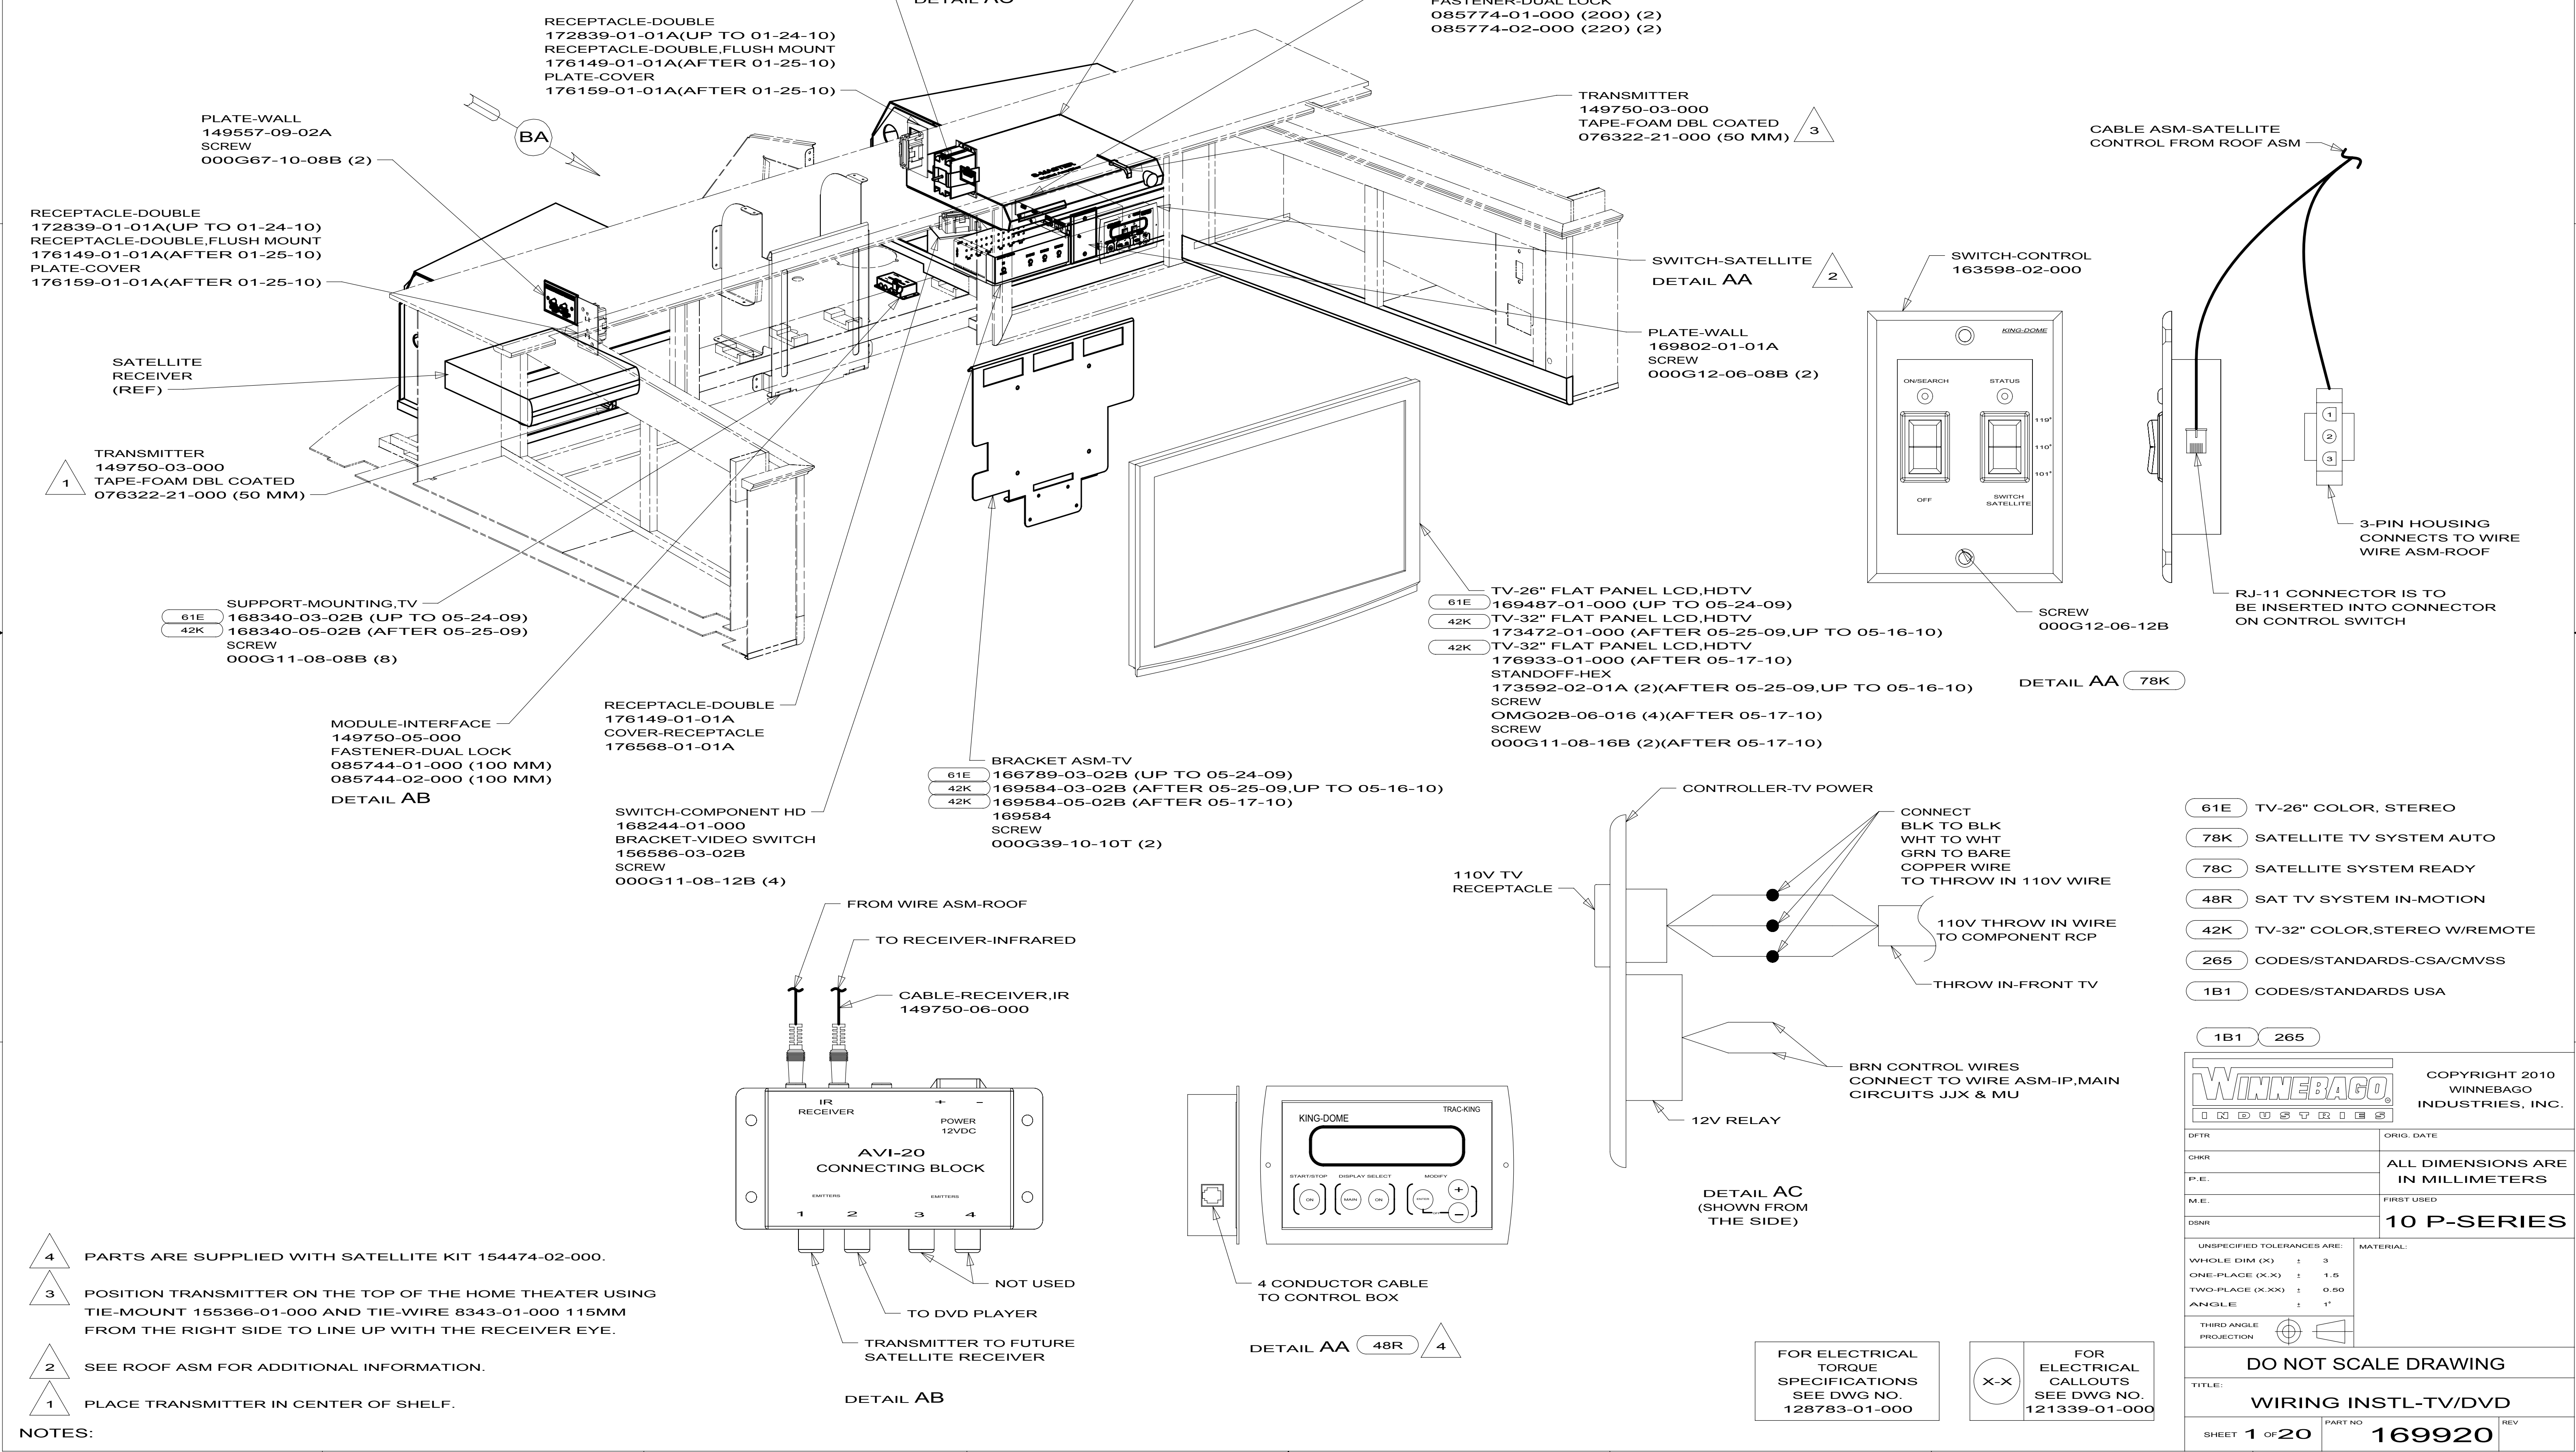


NOTES:

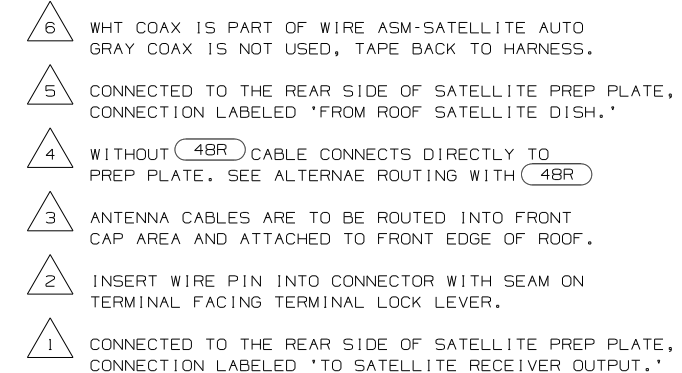
- 4 PARTS ARE SUPPLIED WITH SATELLITE KIT 154474-02-000.
- 3 POSITION TRANSMITTER ON THE TOP OF THE HOME THEATER USING TIE-MOUNT 155366-01-000 AND TIE-WIRE 8343-01-000 115MM FROM THE RIGHT SIDE TO LINE UP WITH THE RECEIVER EYE.
- 2 SEE ROOF ASM FOR ADDITIONAL INFORMATION.
- 1 PLACE TRANSMITTER IN CENTER OF SHELF.



- | | | | |
|----------------------|--|---------|--------|
| 1B1 | | 265 | |
| FIRST USED | | | |
| 10 P-SERIES | | | |
| DO NOT SCALE DRAWING | | | |
| TITLE: | | | |
| WIRING INSTL-TV/DVD | | | |
| SHEET 2A | | PART NO | 169920 |
| | | | REV |

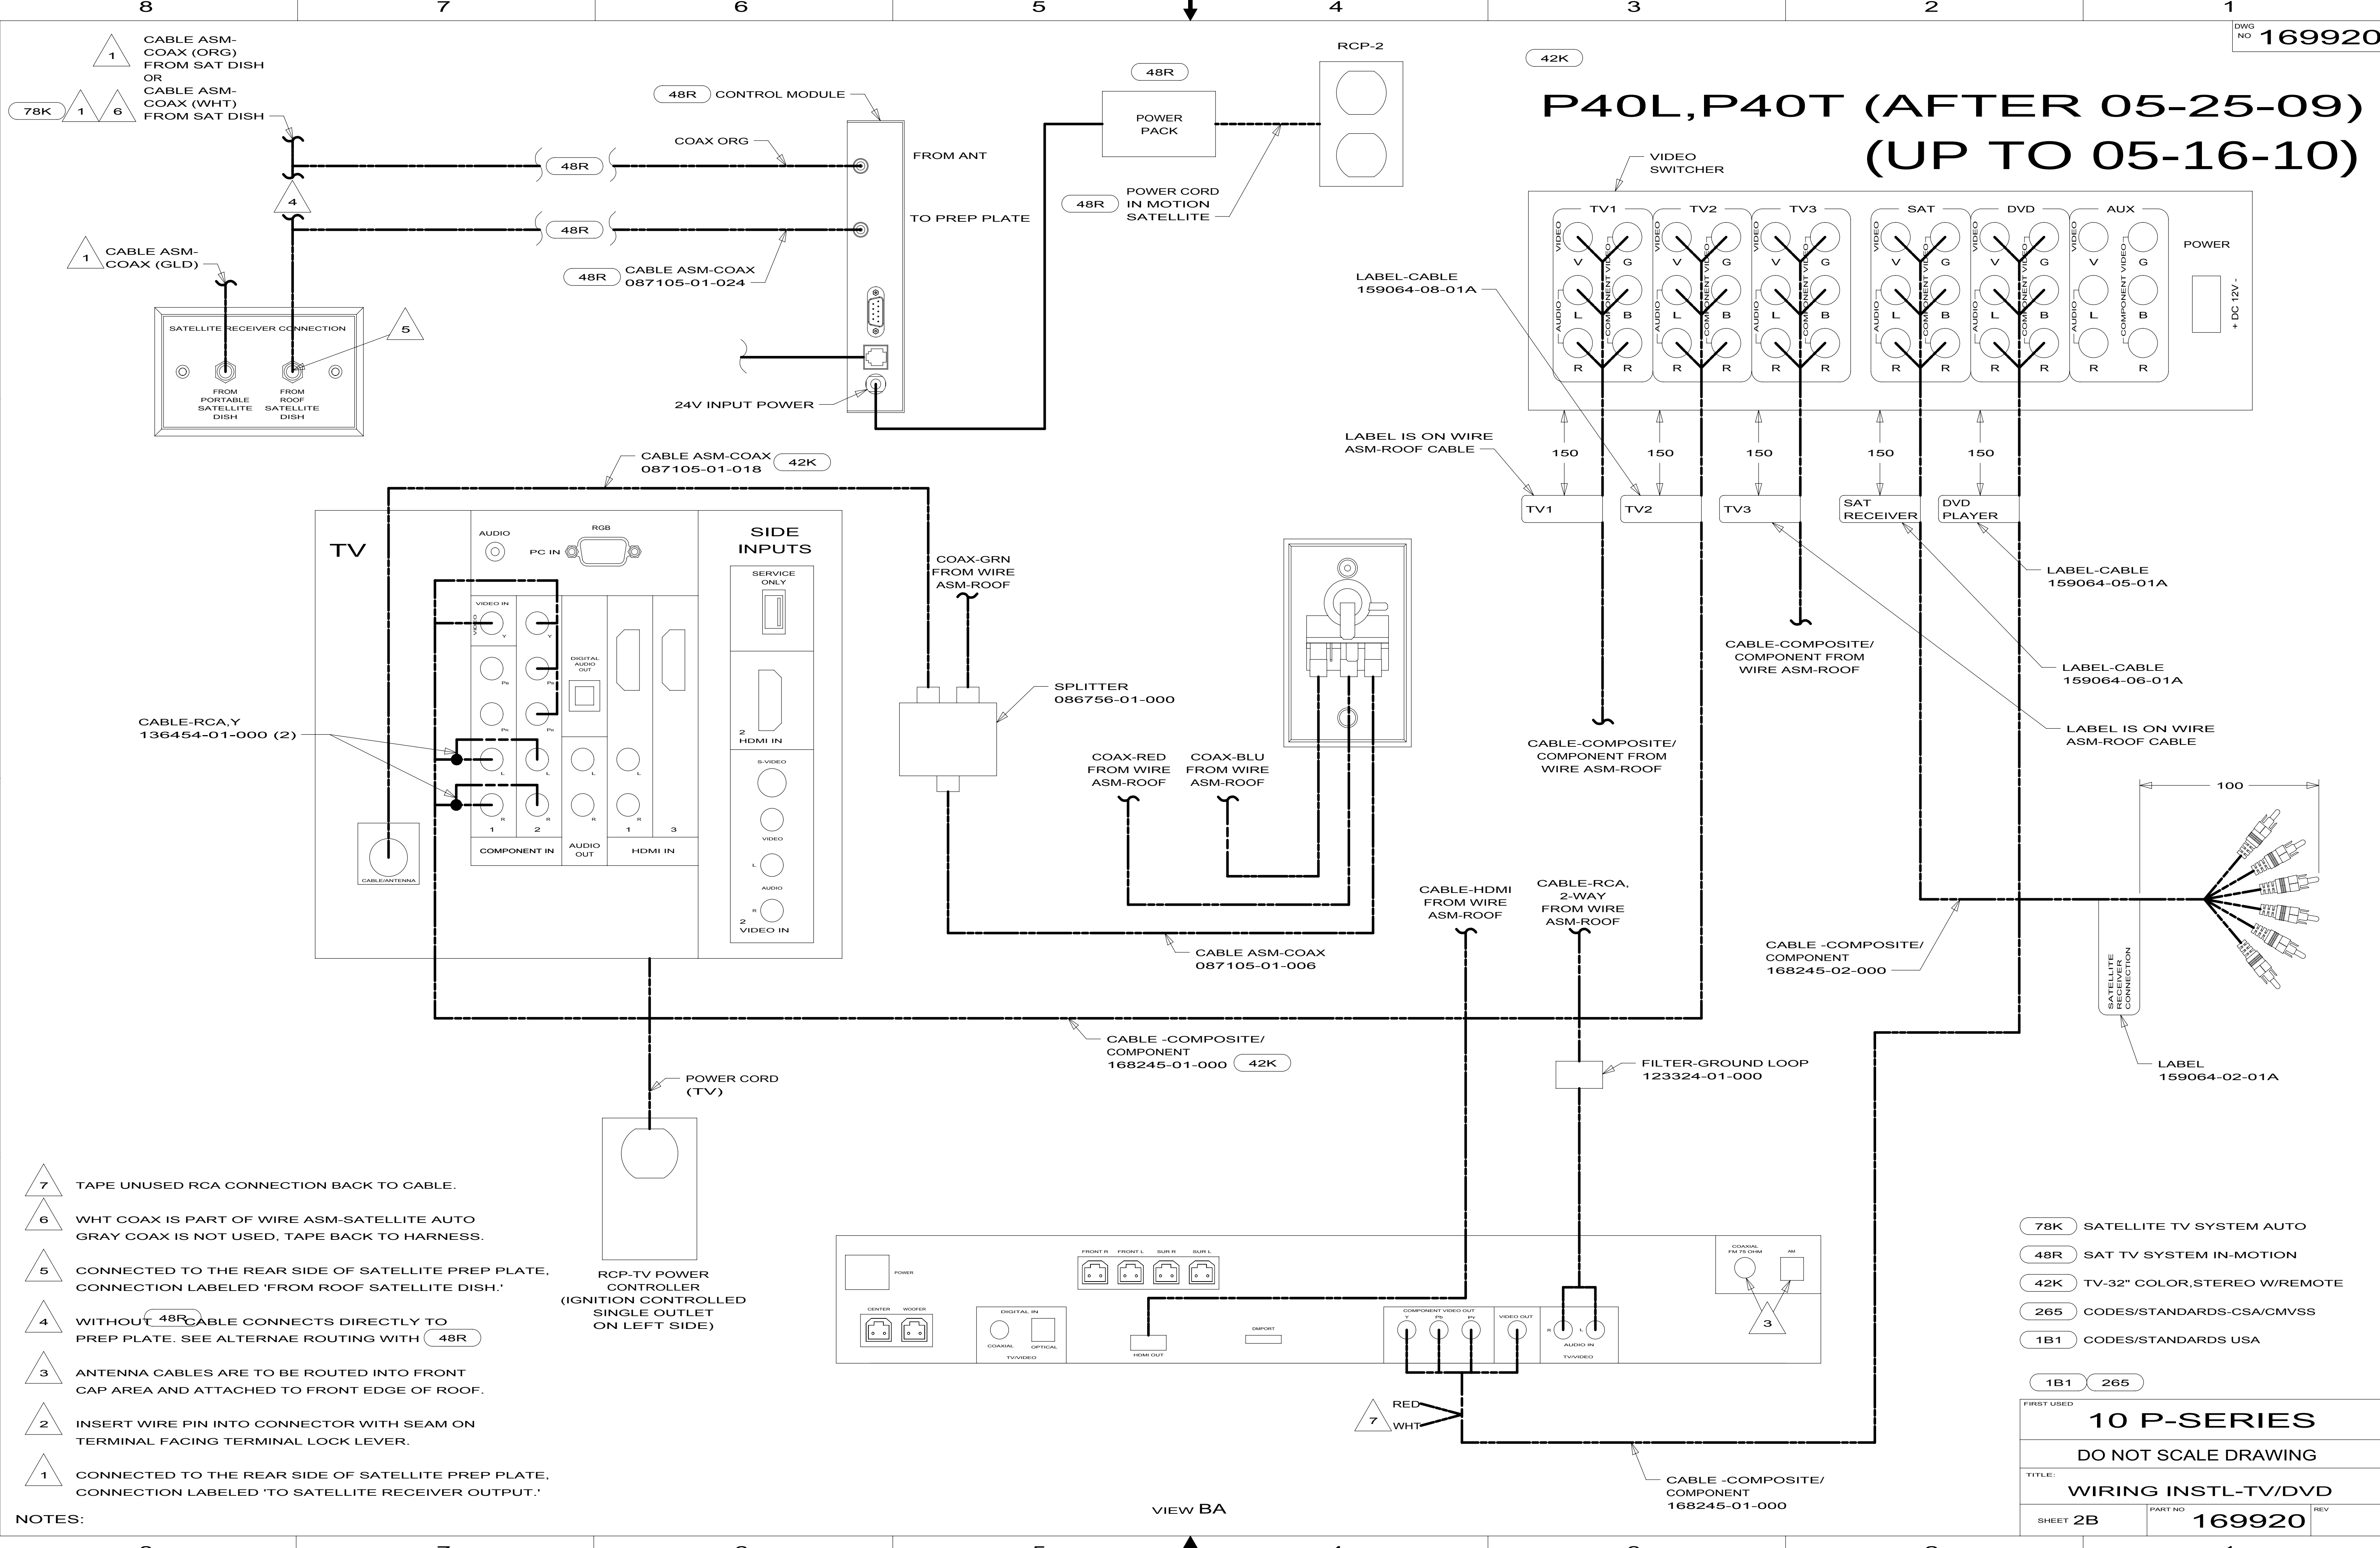



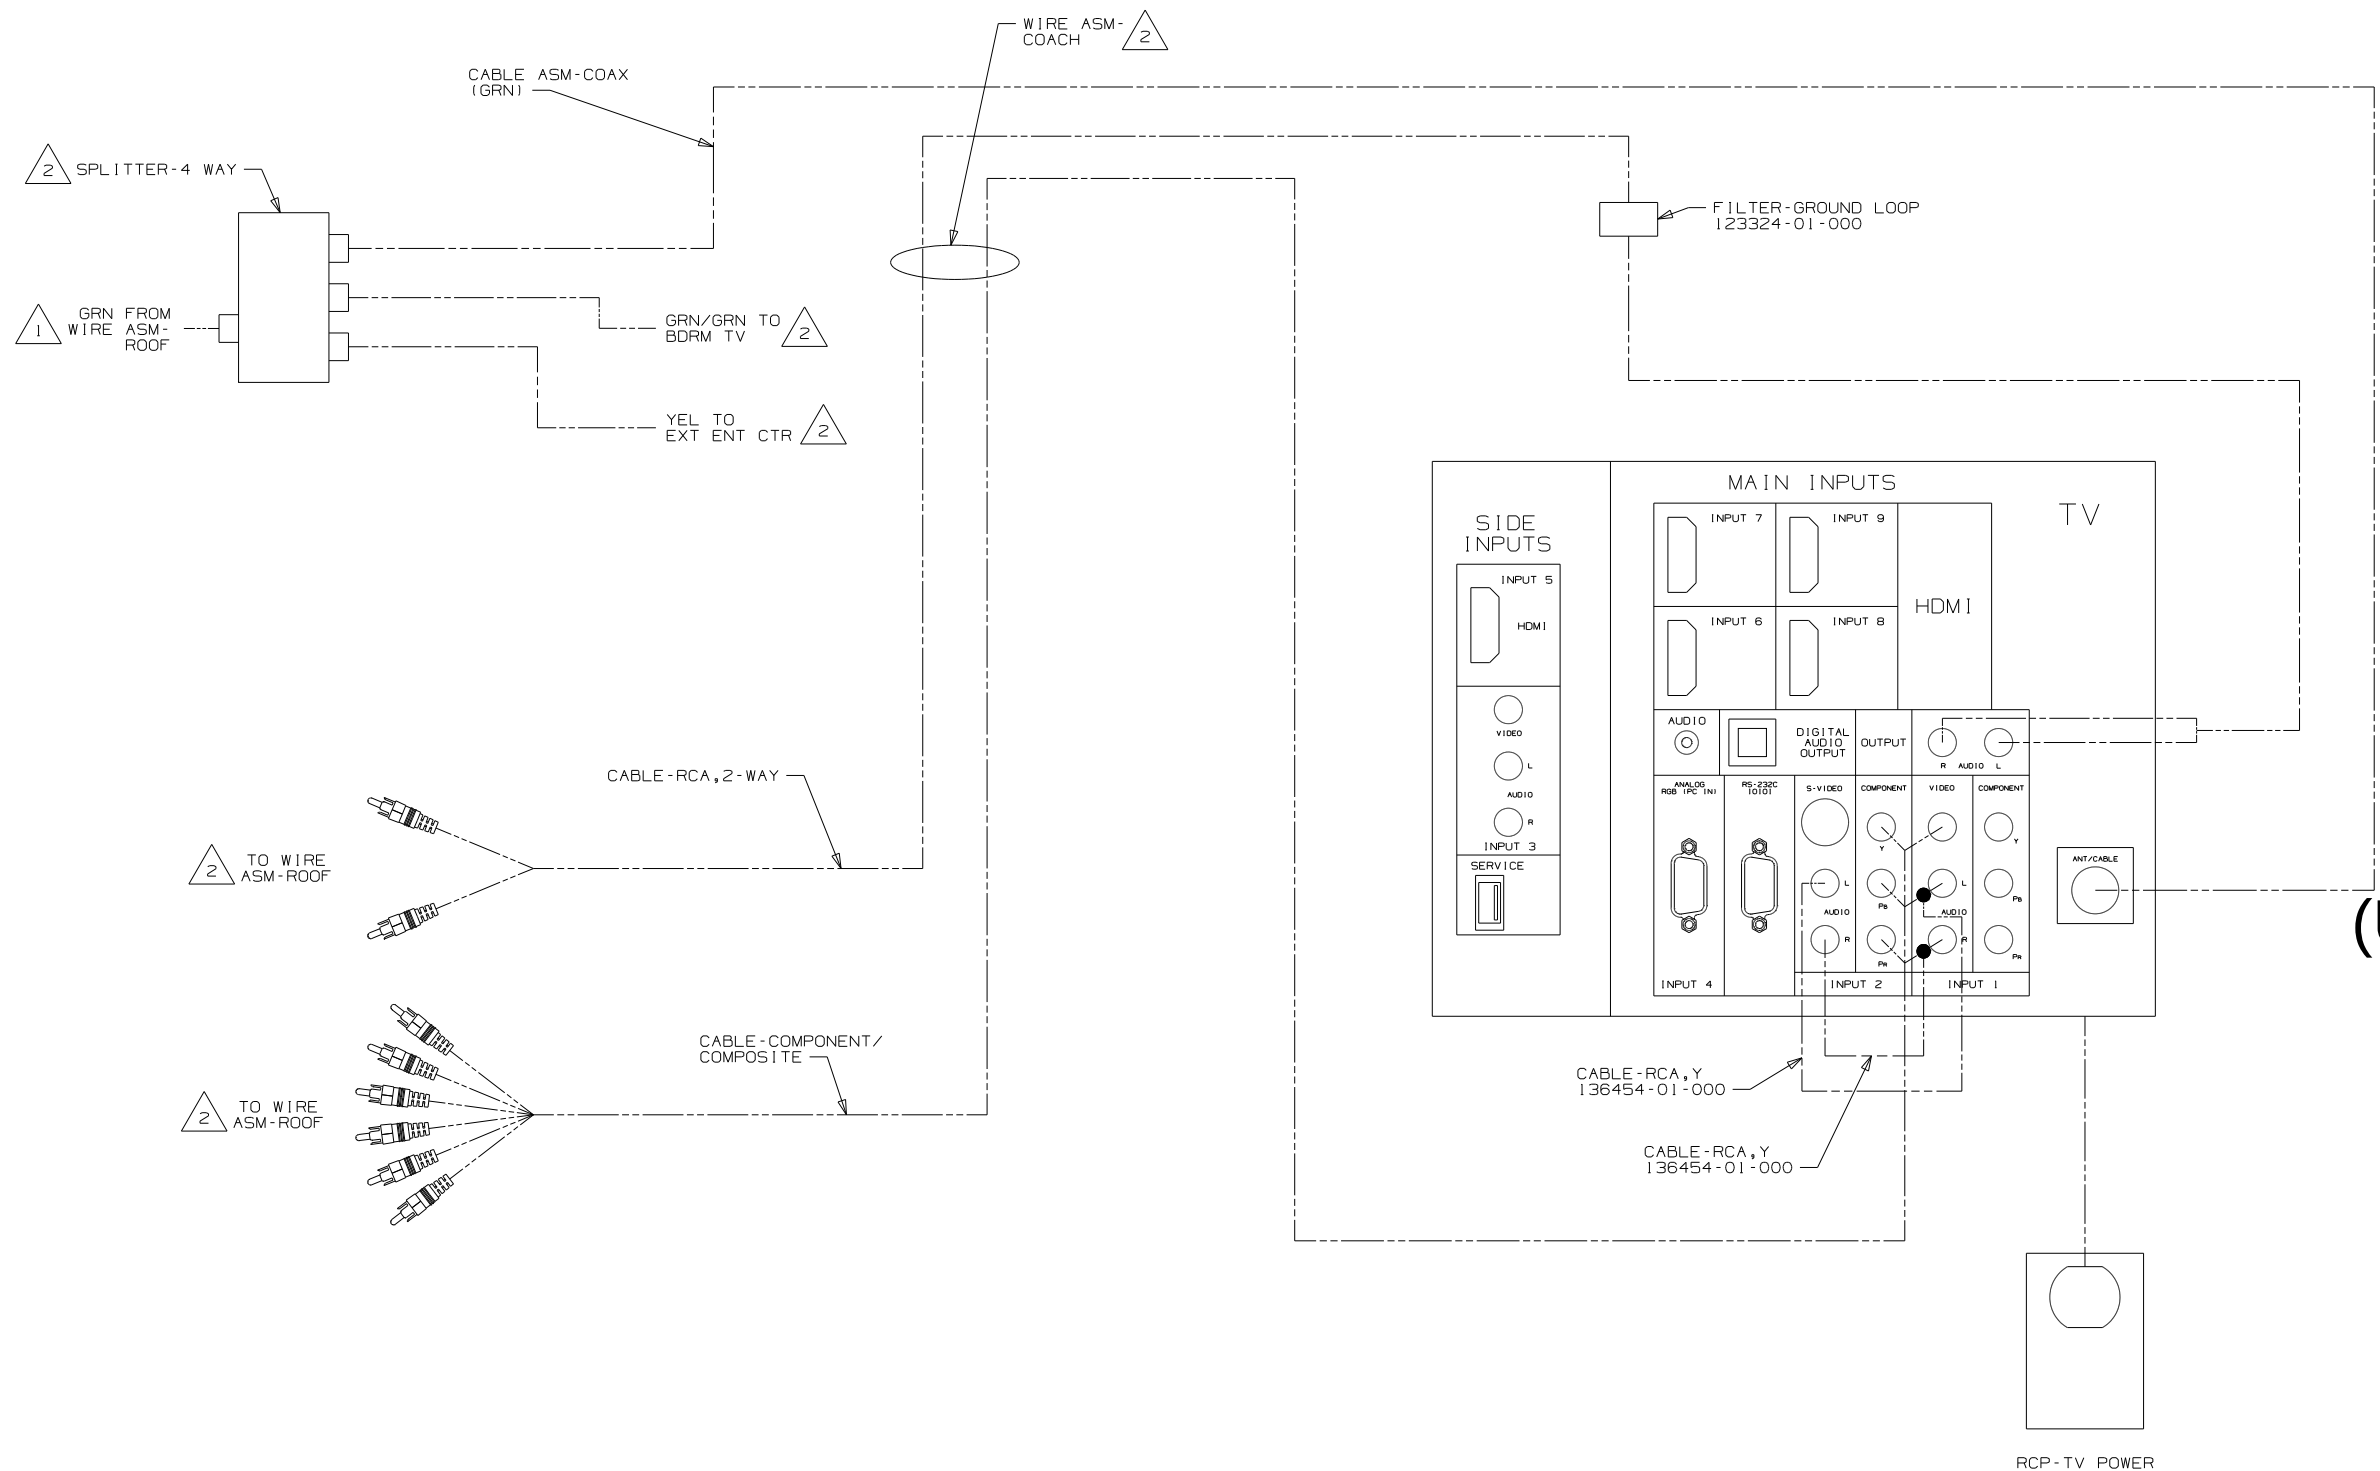

44R OR 68L
P40L,P40T
(UP TO 05-24-09)

VIEW DA

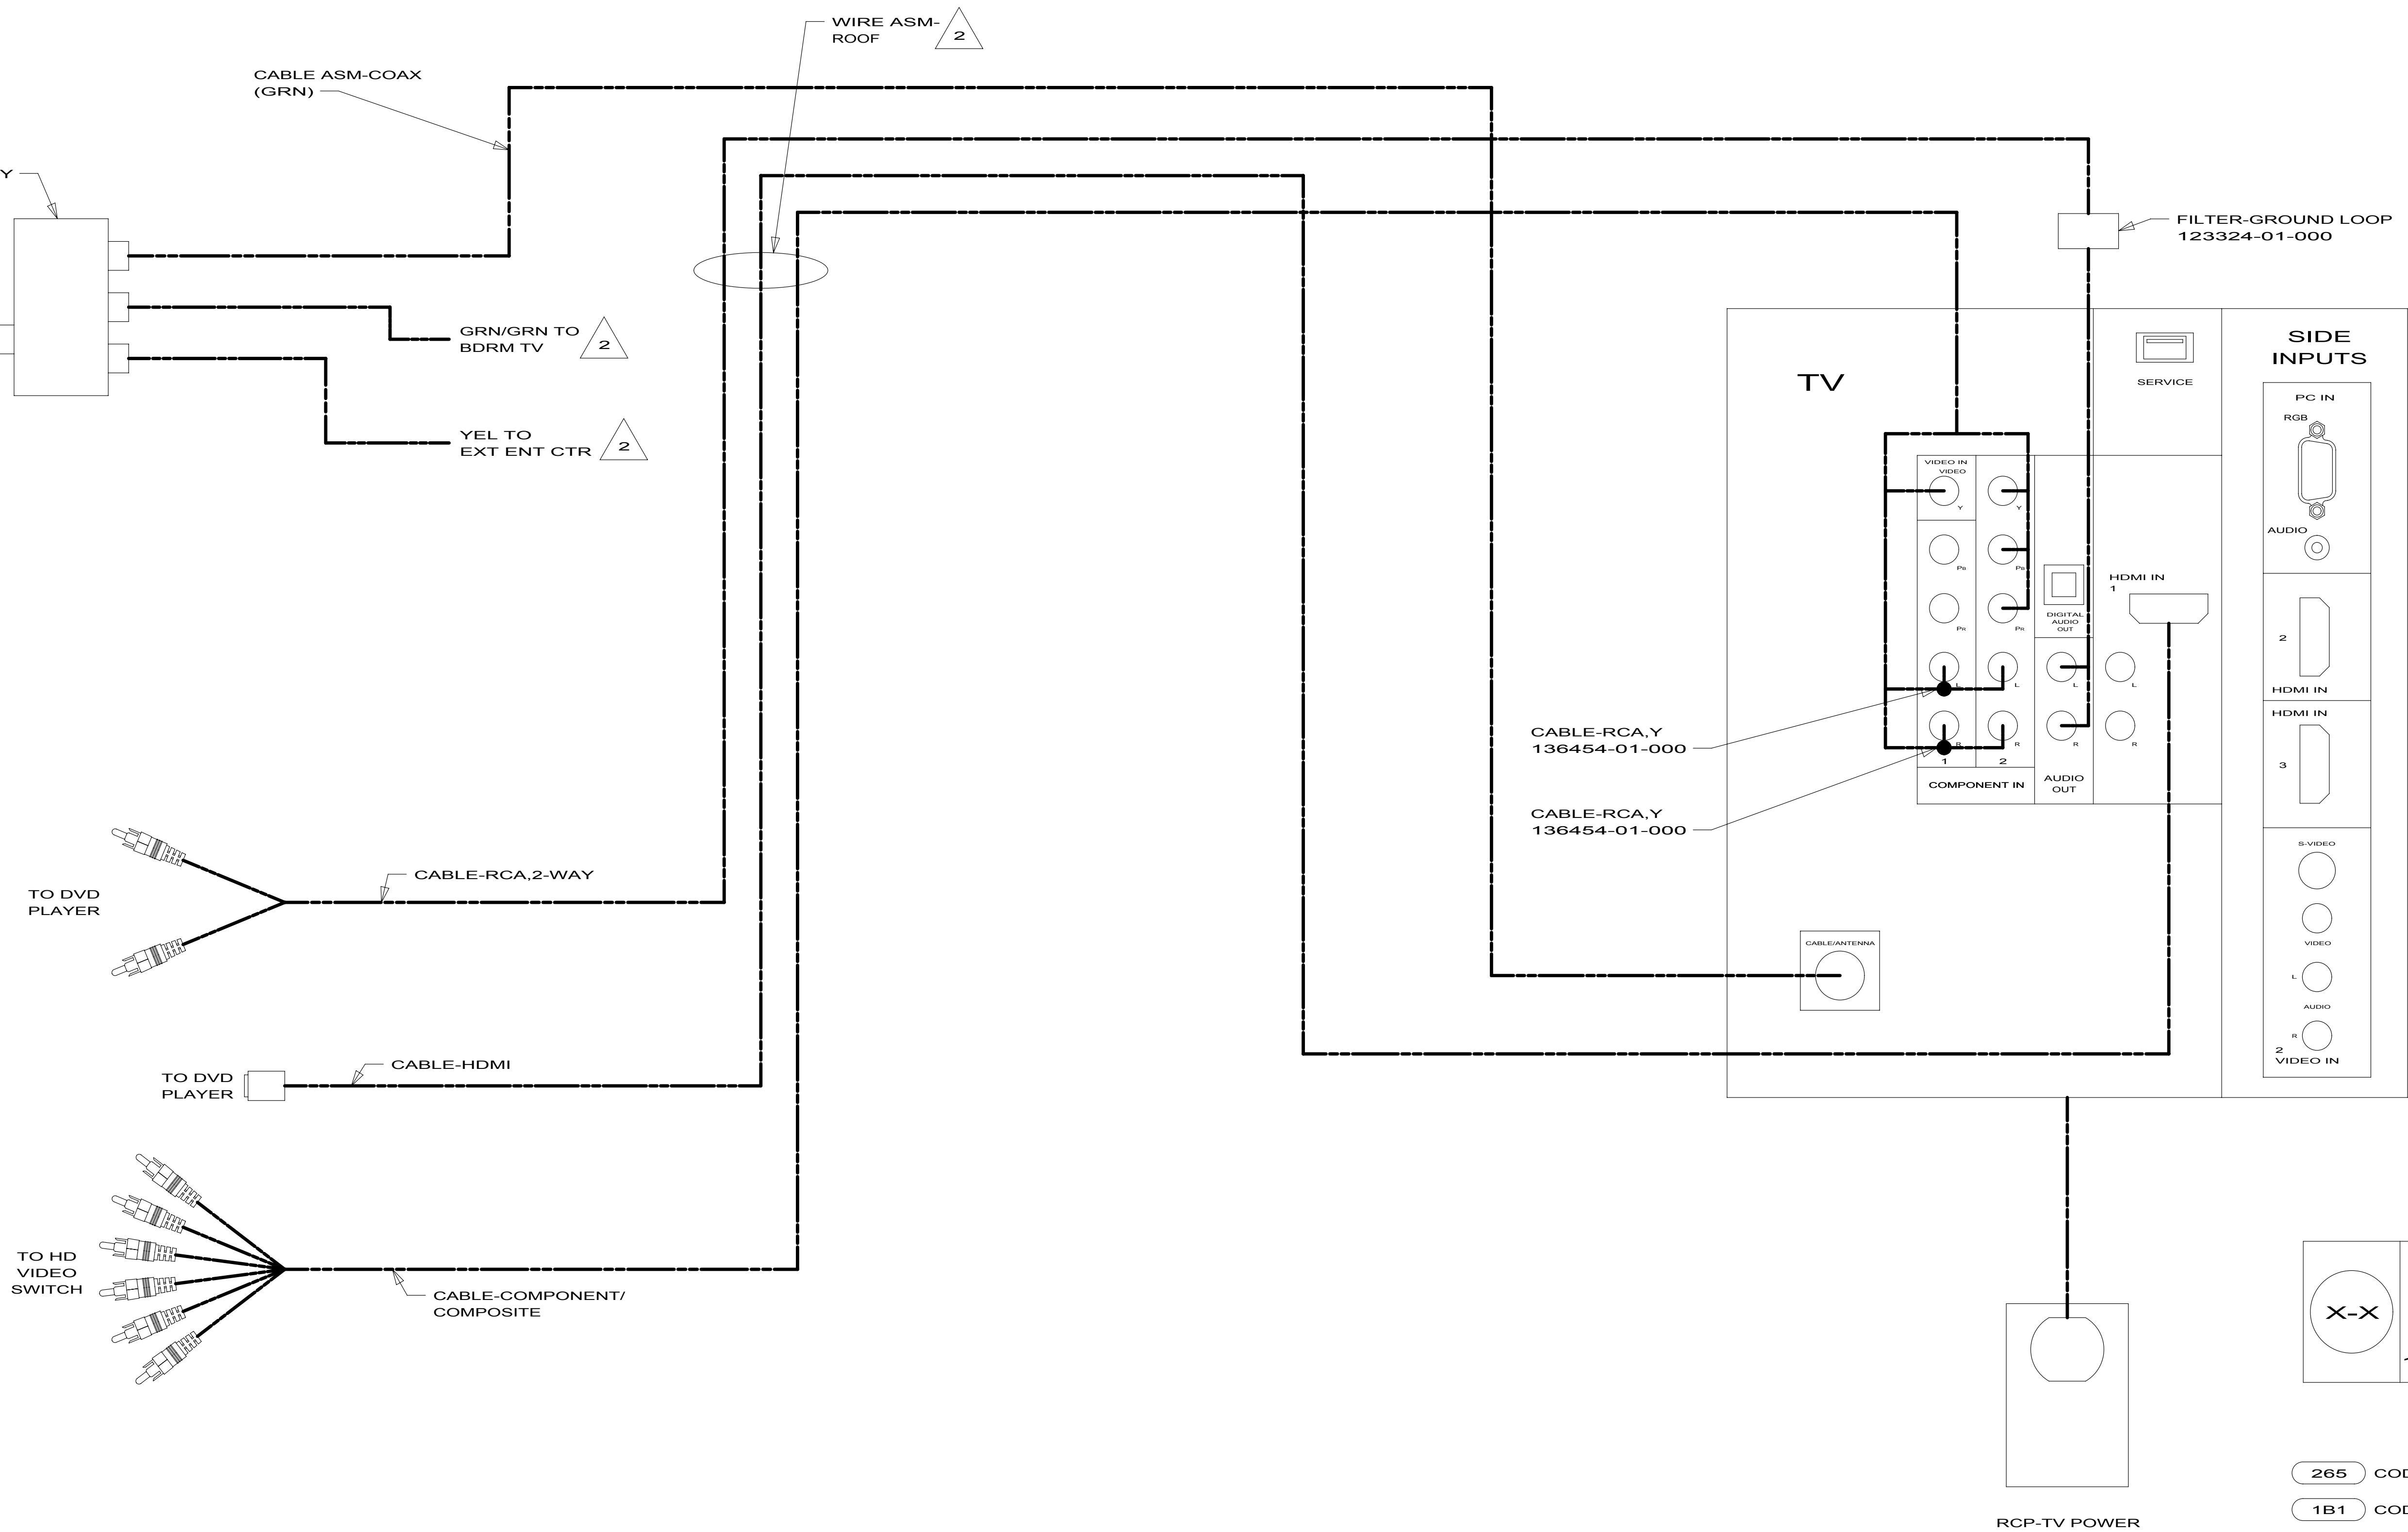
2 SEE WIRING INSTL-BODY,12V FOR ADDITIONAL INFORMATION.
1 CABLE ROUTED IN ROOF

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000
FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265
FIRST USED
10 P-SERIES
DO NOT SCALE DRAWING
TITLE: WIRING INSTL-TV/DVD
SHEET 4A PART NO 169920 REV C

P40L,P40T(AFTER 05-25-09)



2 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
1 CABLE ROUTED IN ROOF

NOTES:



FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA


1B1 265

FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-TV/DVD		
SHEET 4B	PART NO 169920	REV

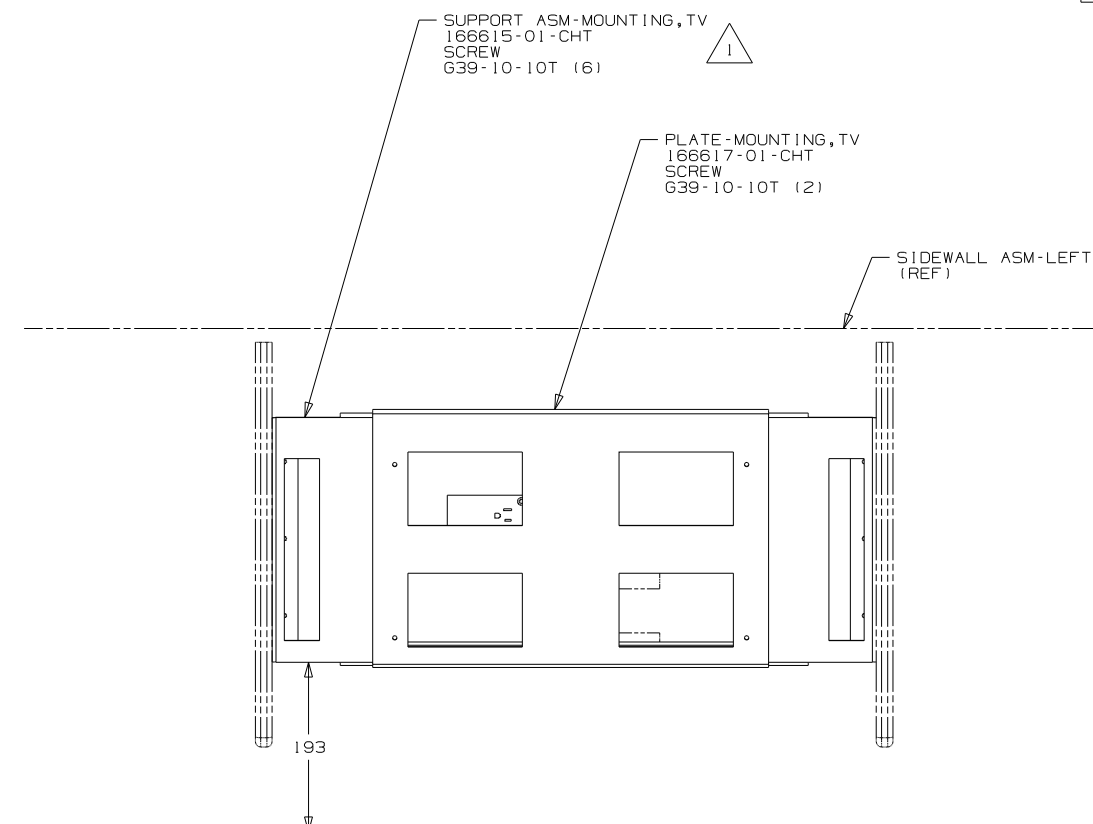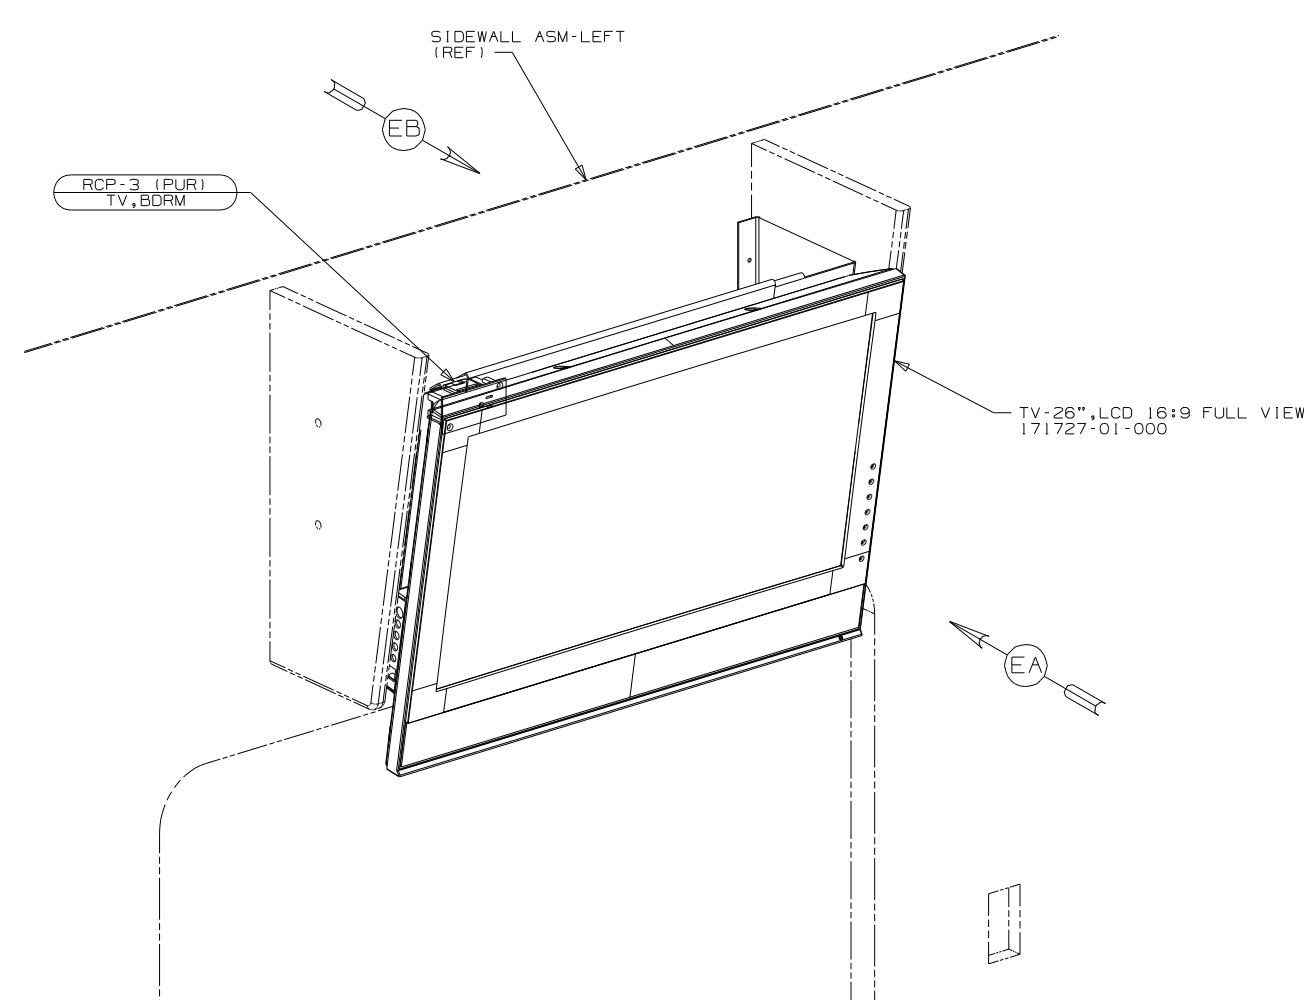

P40L,P40T
61K
(UP TO 05-24-09)

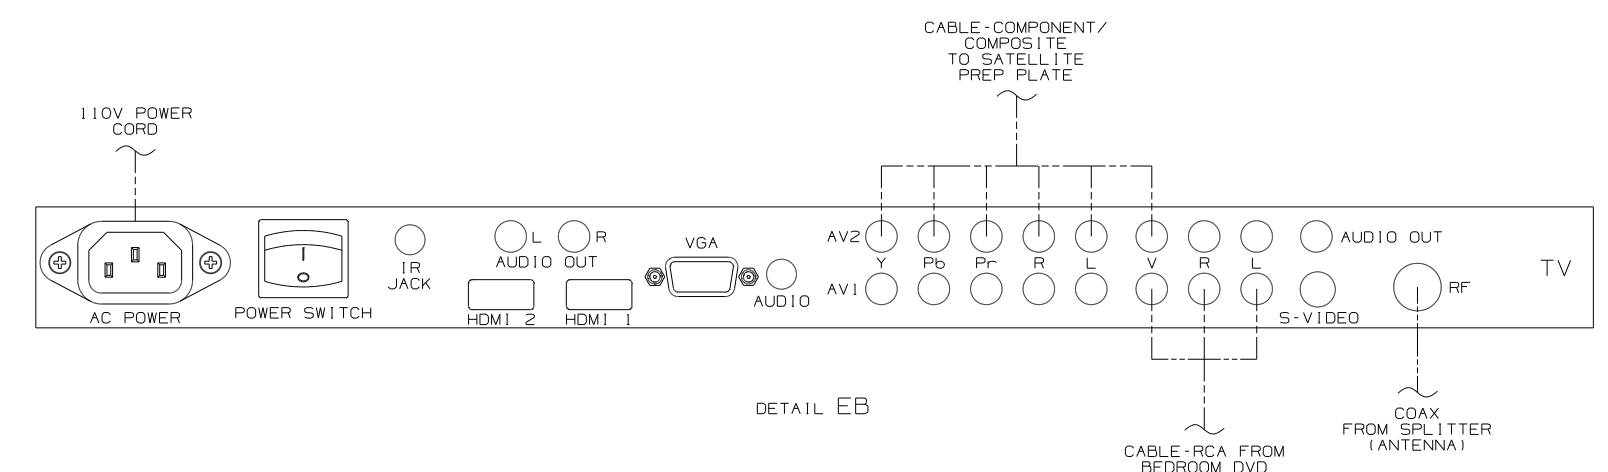VIEW EA
(TV NOT SHOWN)



DETAIL EB

NOTES:

1 CENTER SUPPORT ASM-MOUNTING, TV ABOVE WINDOW CUTOUT.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


61K TV (REAR)-26" COLOR STEREO

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA

1B1 265 61K

FIRST USED			10 P-SERIES		
			DO NOT SCALE DRAWING		
TITLE			WIRING INSTL-TV/DVD		
SHEET		5A	PART NO	169920	REV C

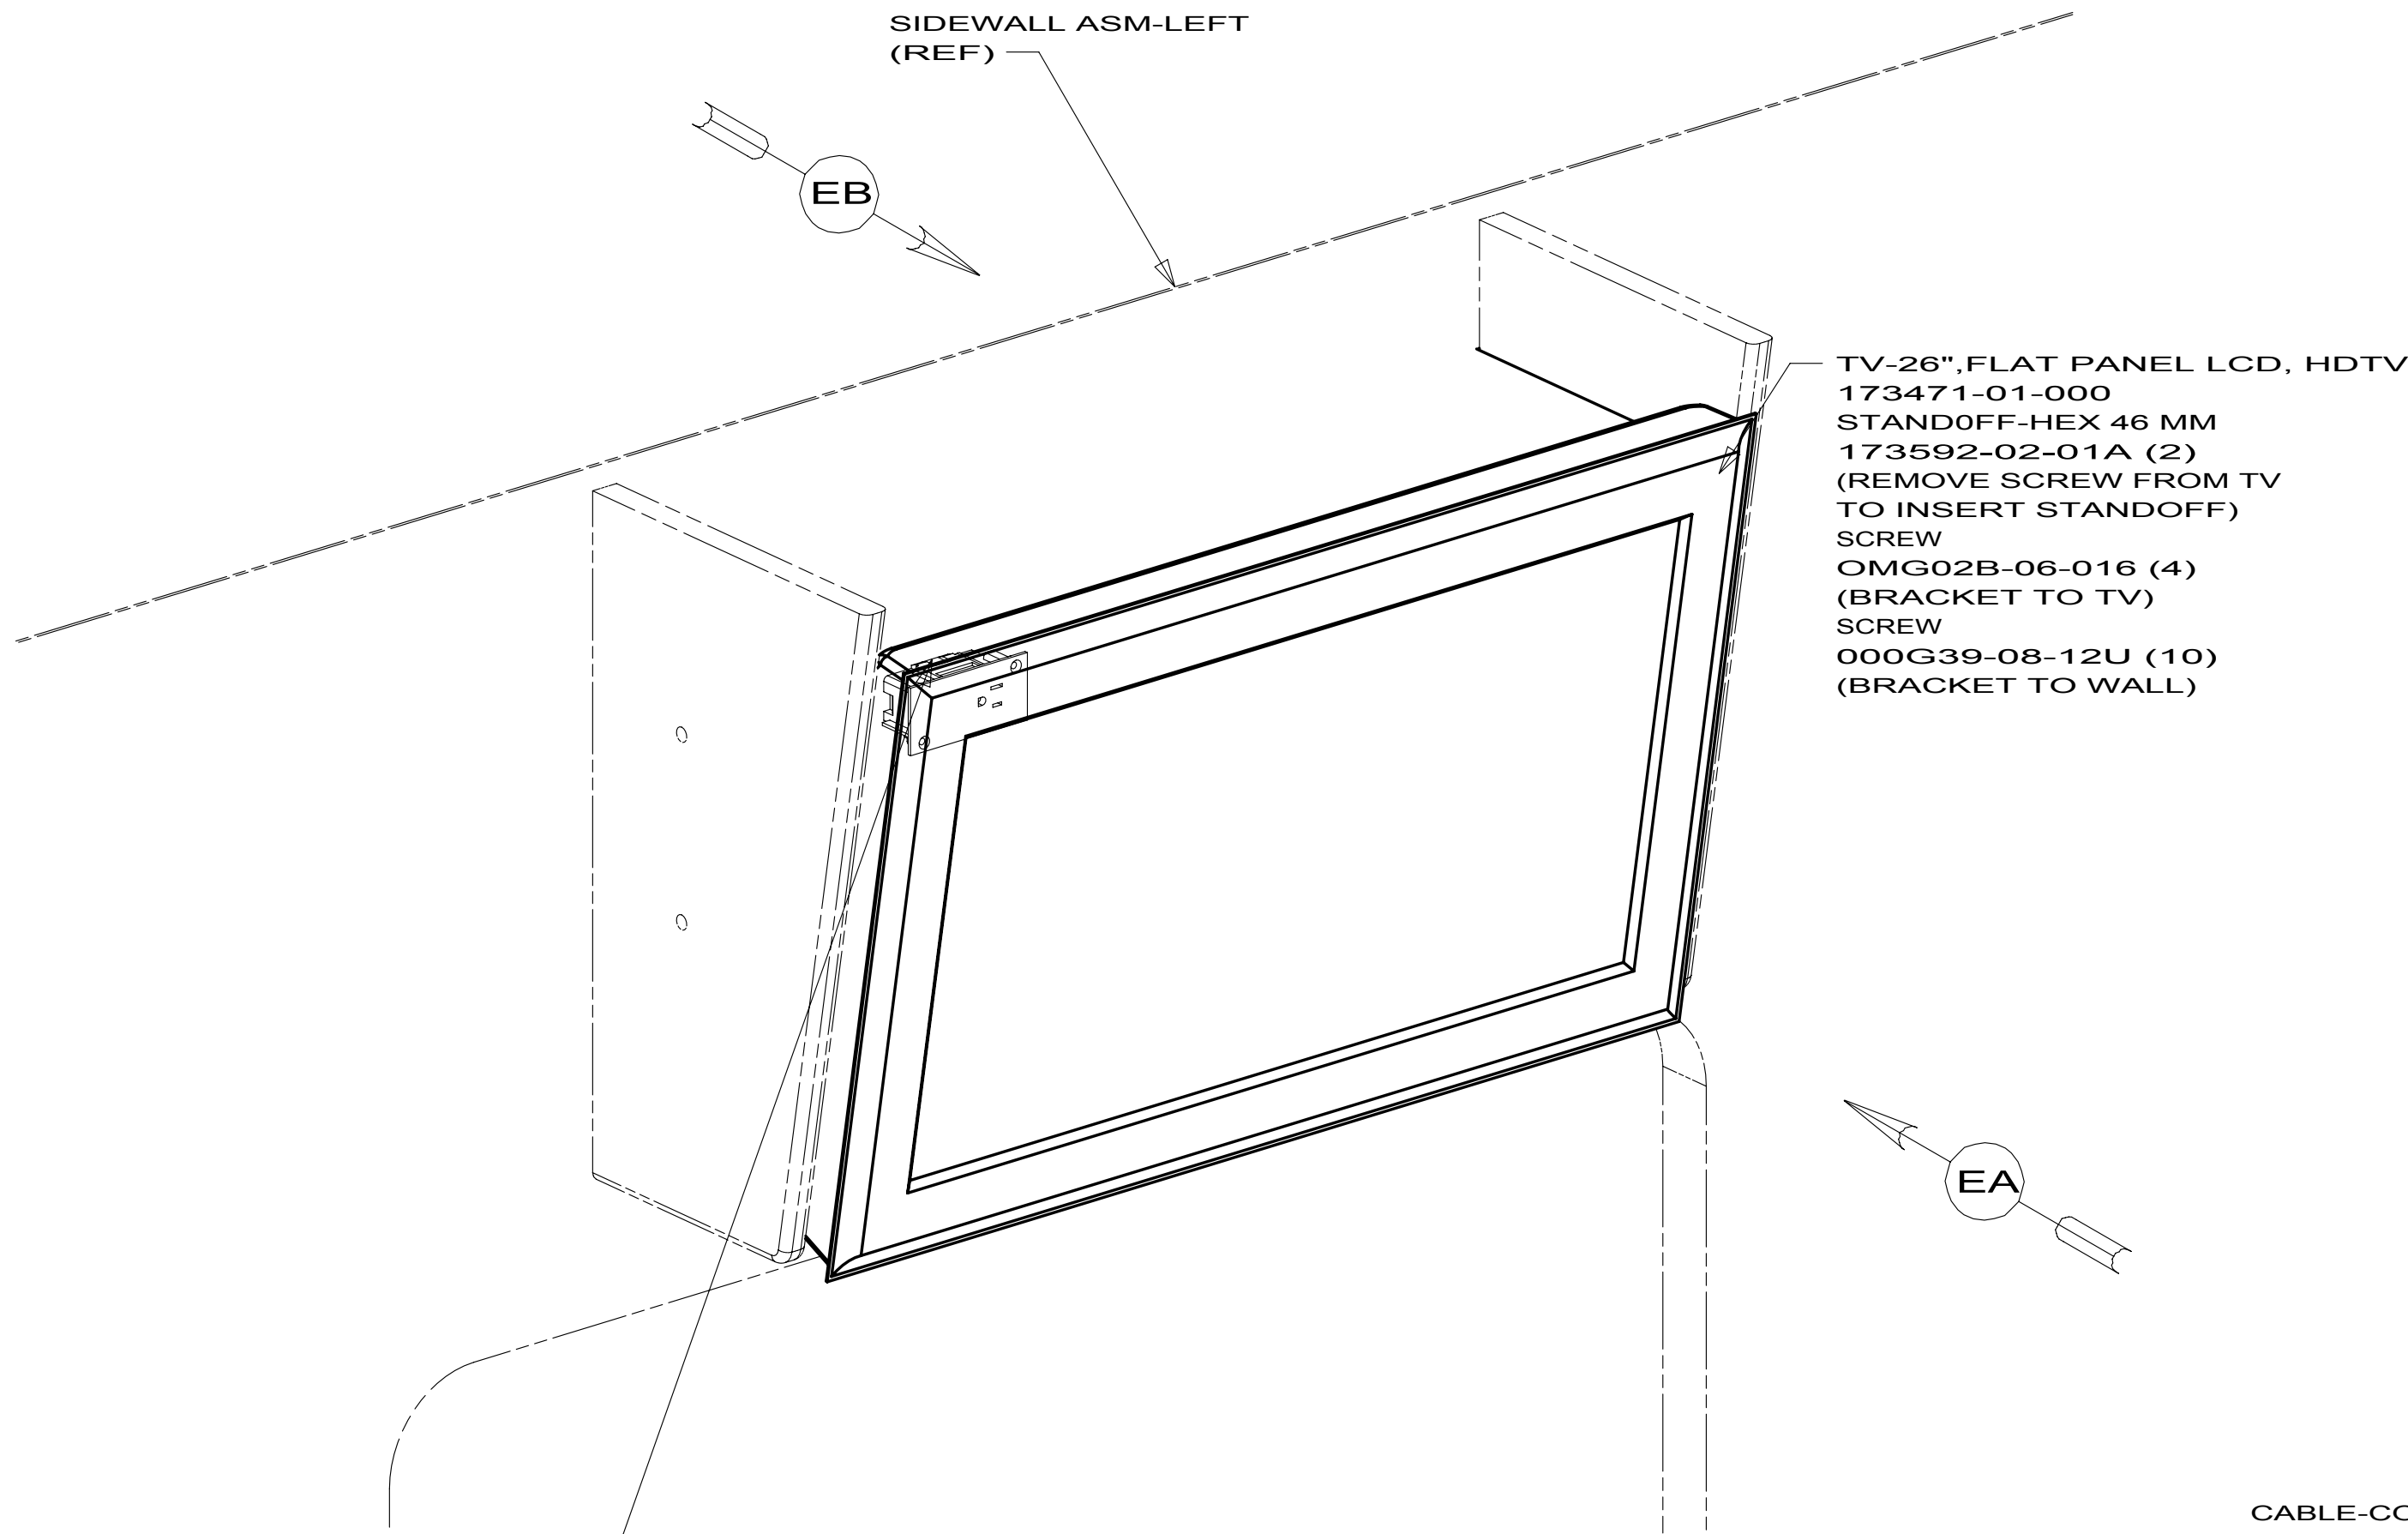


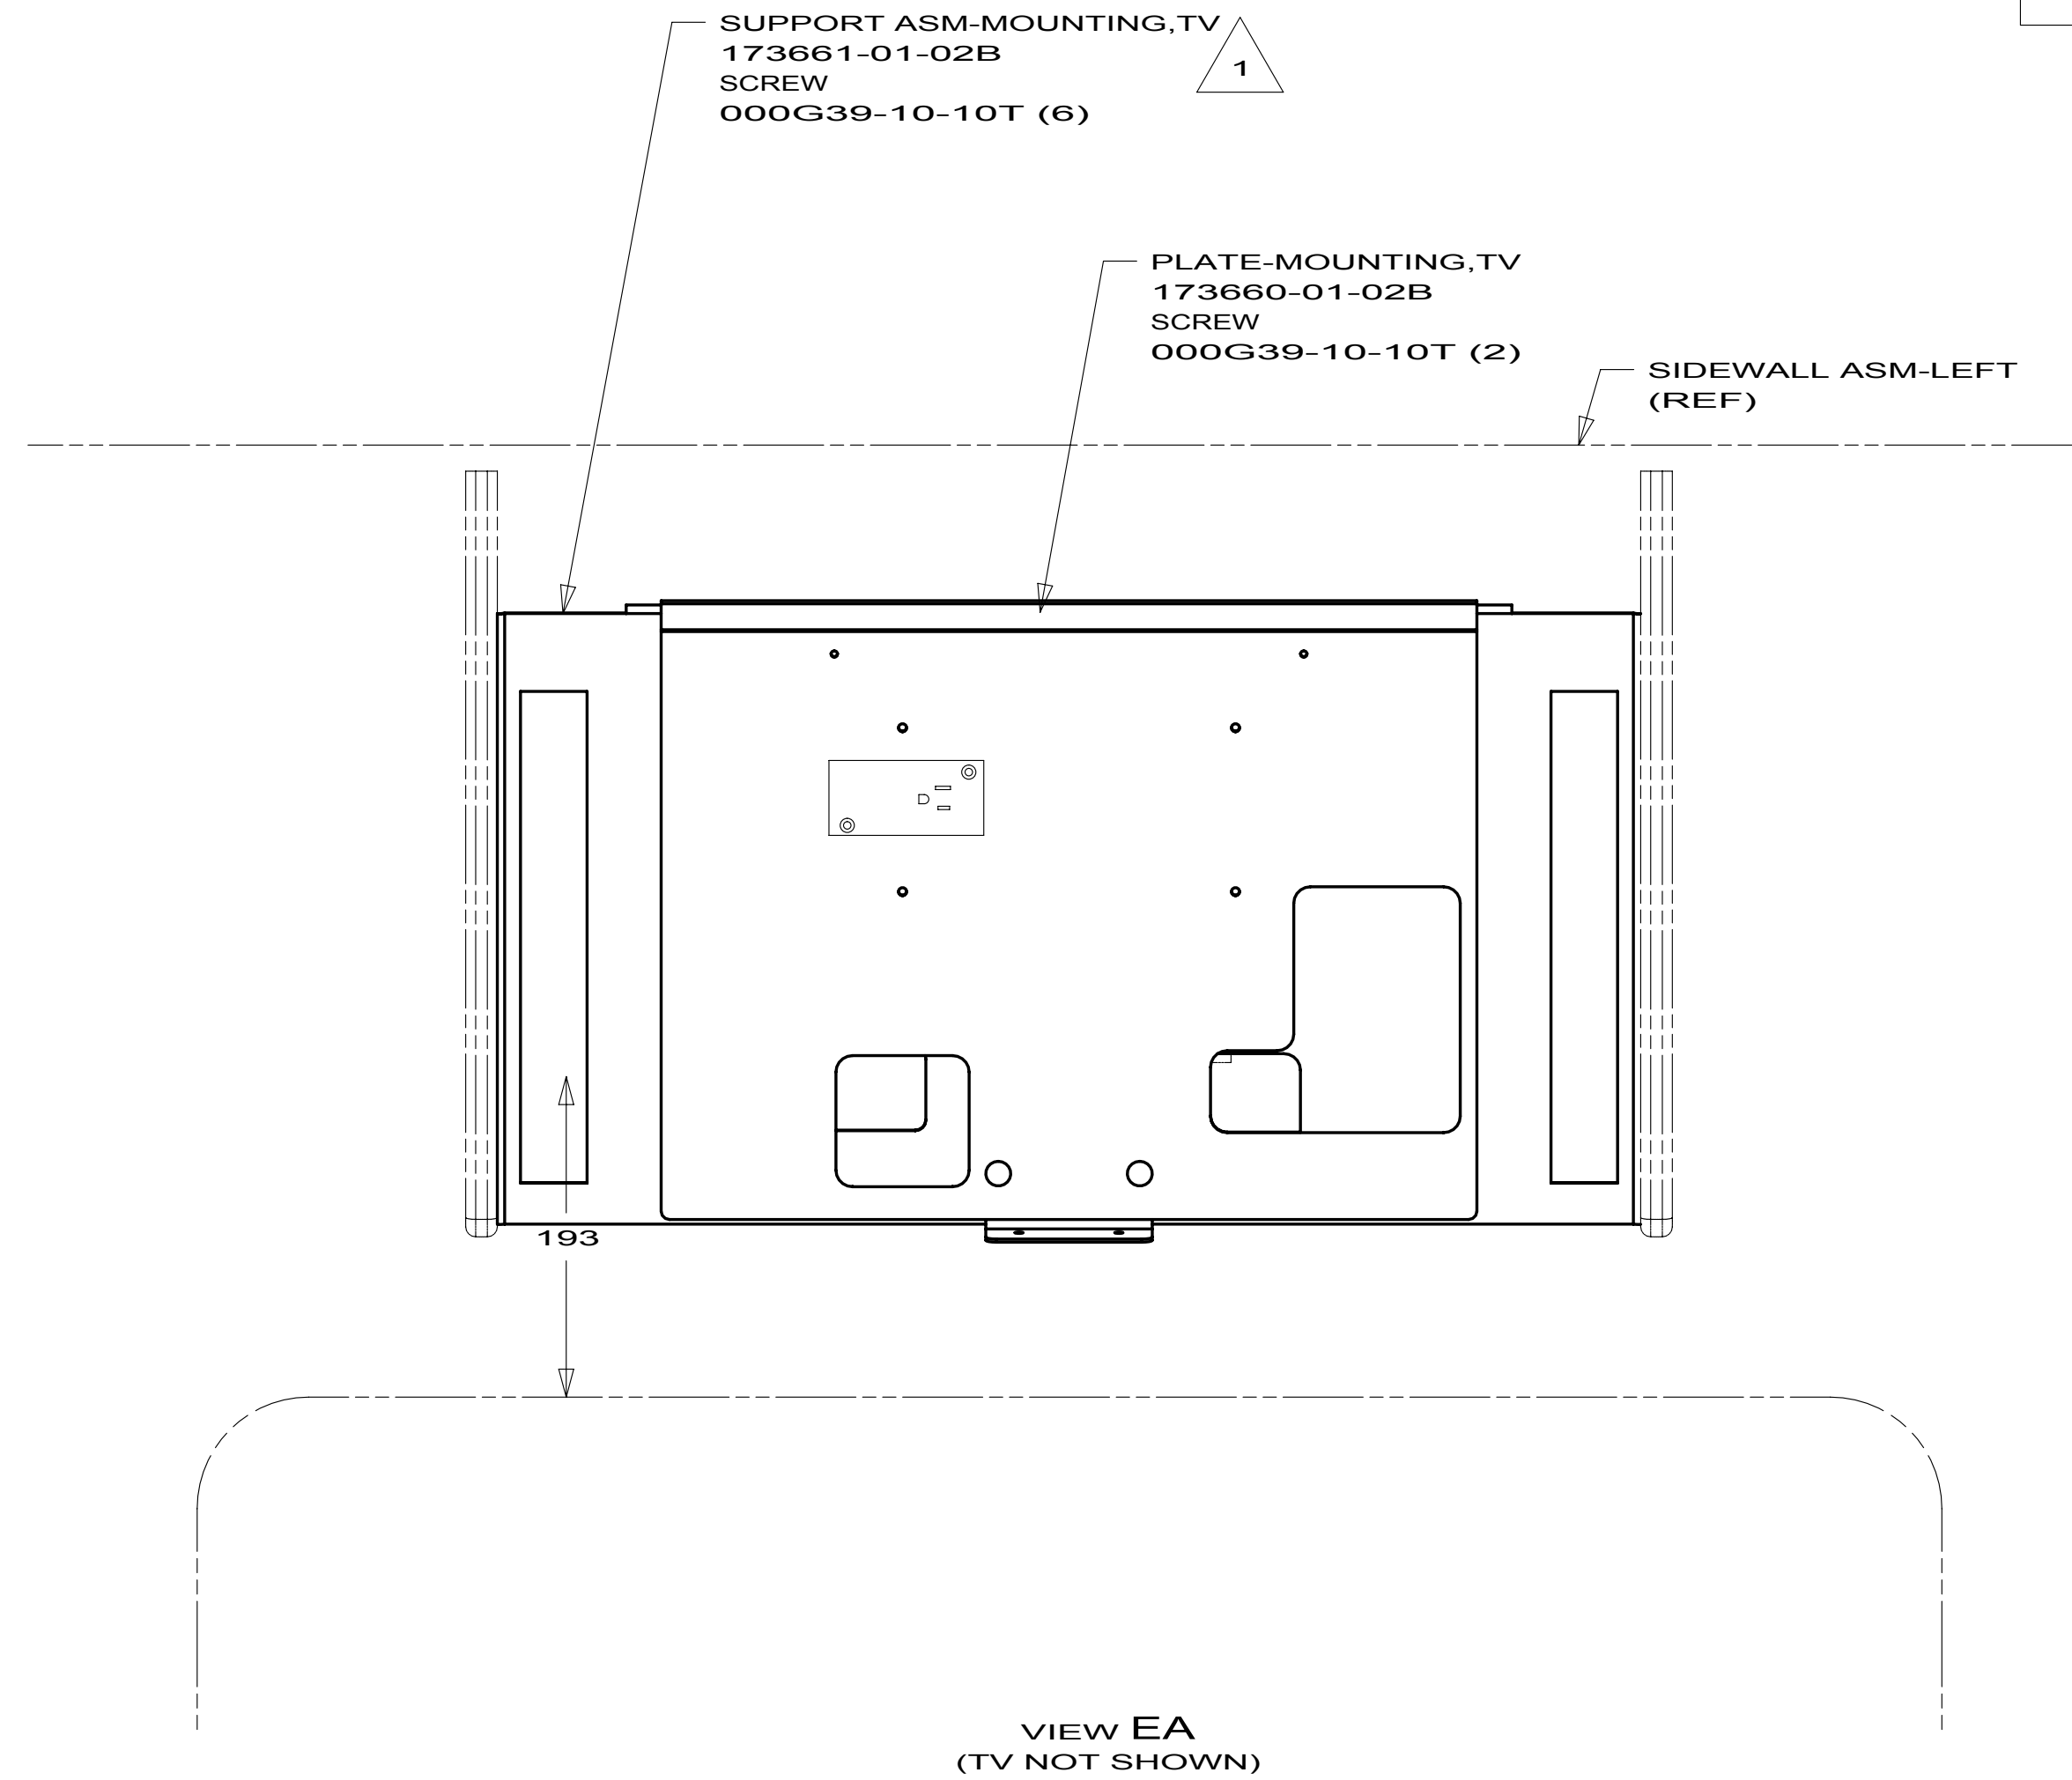RECEPTACLE-SINGLE
158707-01-000(UP TO 01-24-10)
RECEPTACLE-SINGLE, SURFACE MOUNT
176159-01-01A(AFTER 01-25-10)
PLATE-COVER
176159-01-01A(AFTER 01-25-10)



CABLE-COMPONENT/
COMPOSITE
TO SATELLITE
PREP PLATE

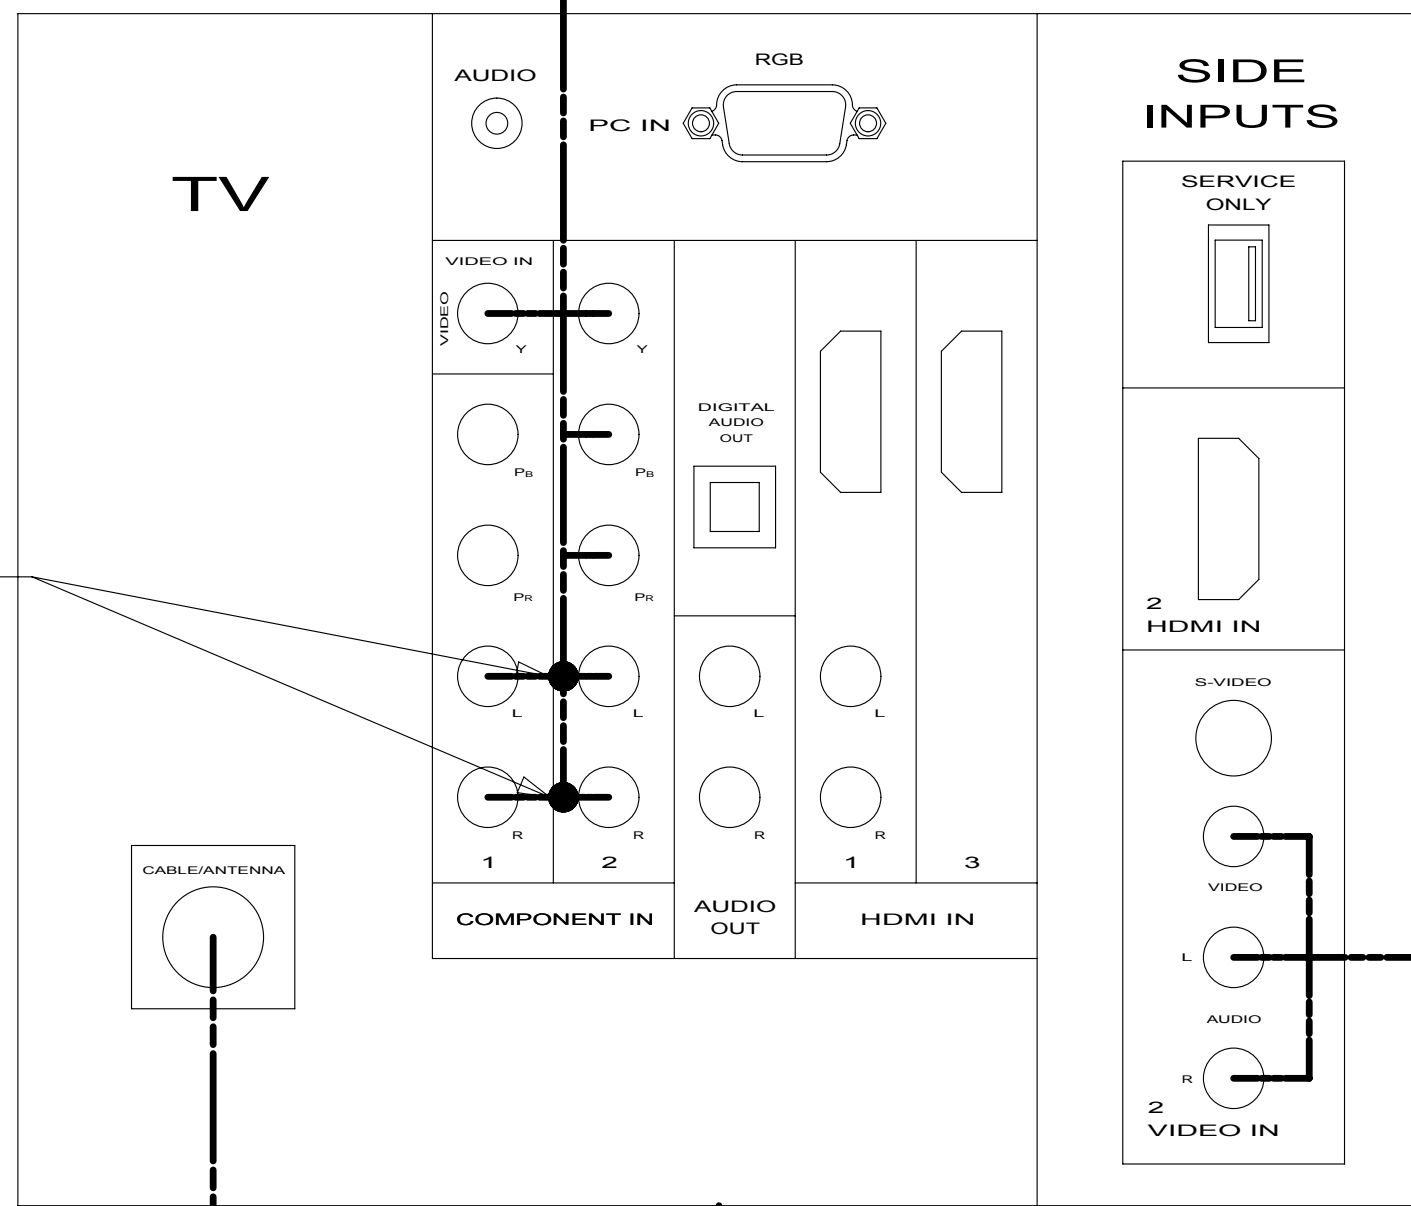CABLE-RCA,Y
136454-01-000 (2)



P40L, P40T (AFTER 05-25-09)

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

61K TV(REAR)-26" COLOR STEREO
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA


1B1 265 61K


FIRST USED		
10 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-TV/DVD		
SHEET 5B	PART NO 169920	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

NOTES:
1 CENTER SUPPORT ASM-MOUNTING,TV ABOVE WINDOW CUTOUT.

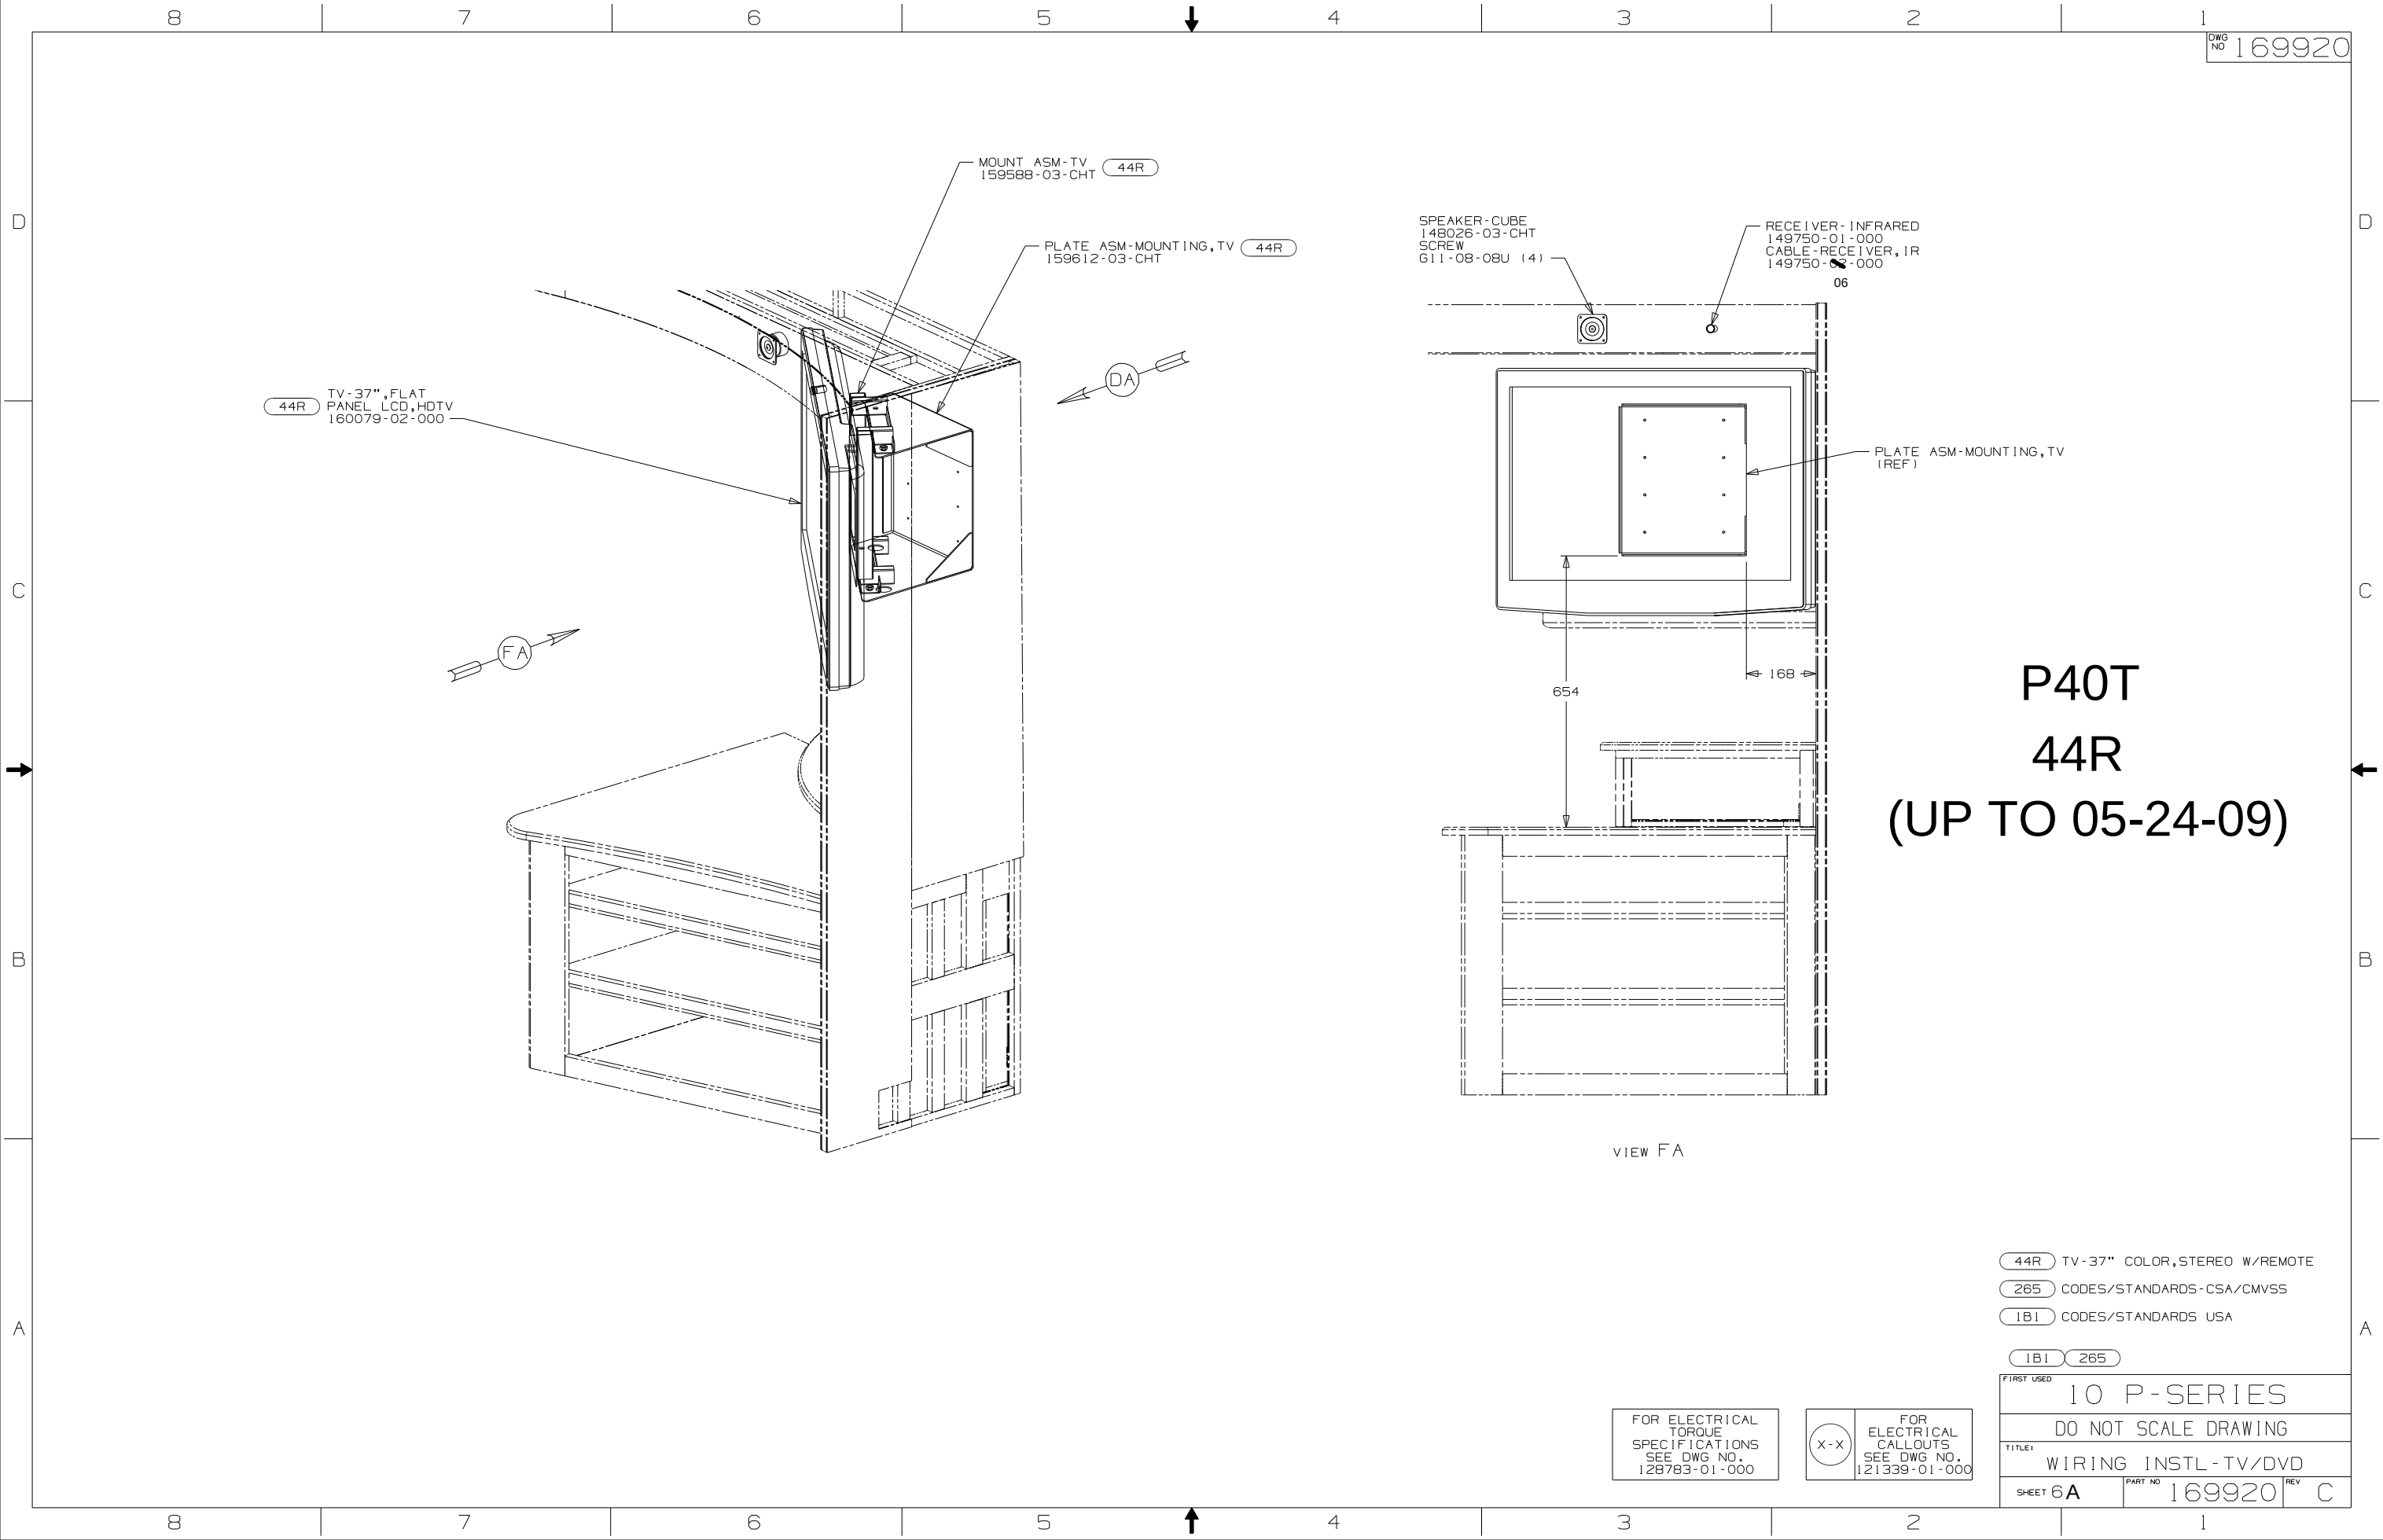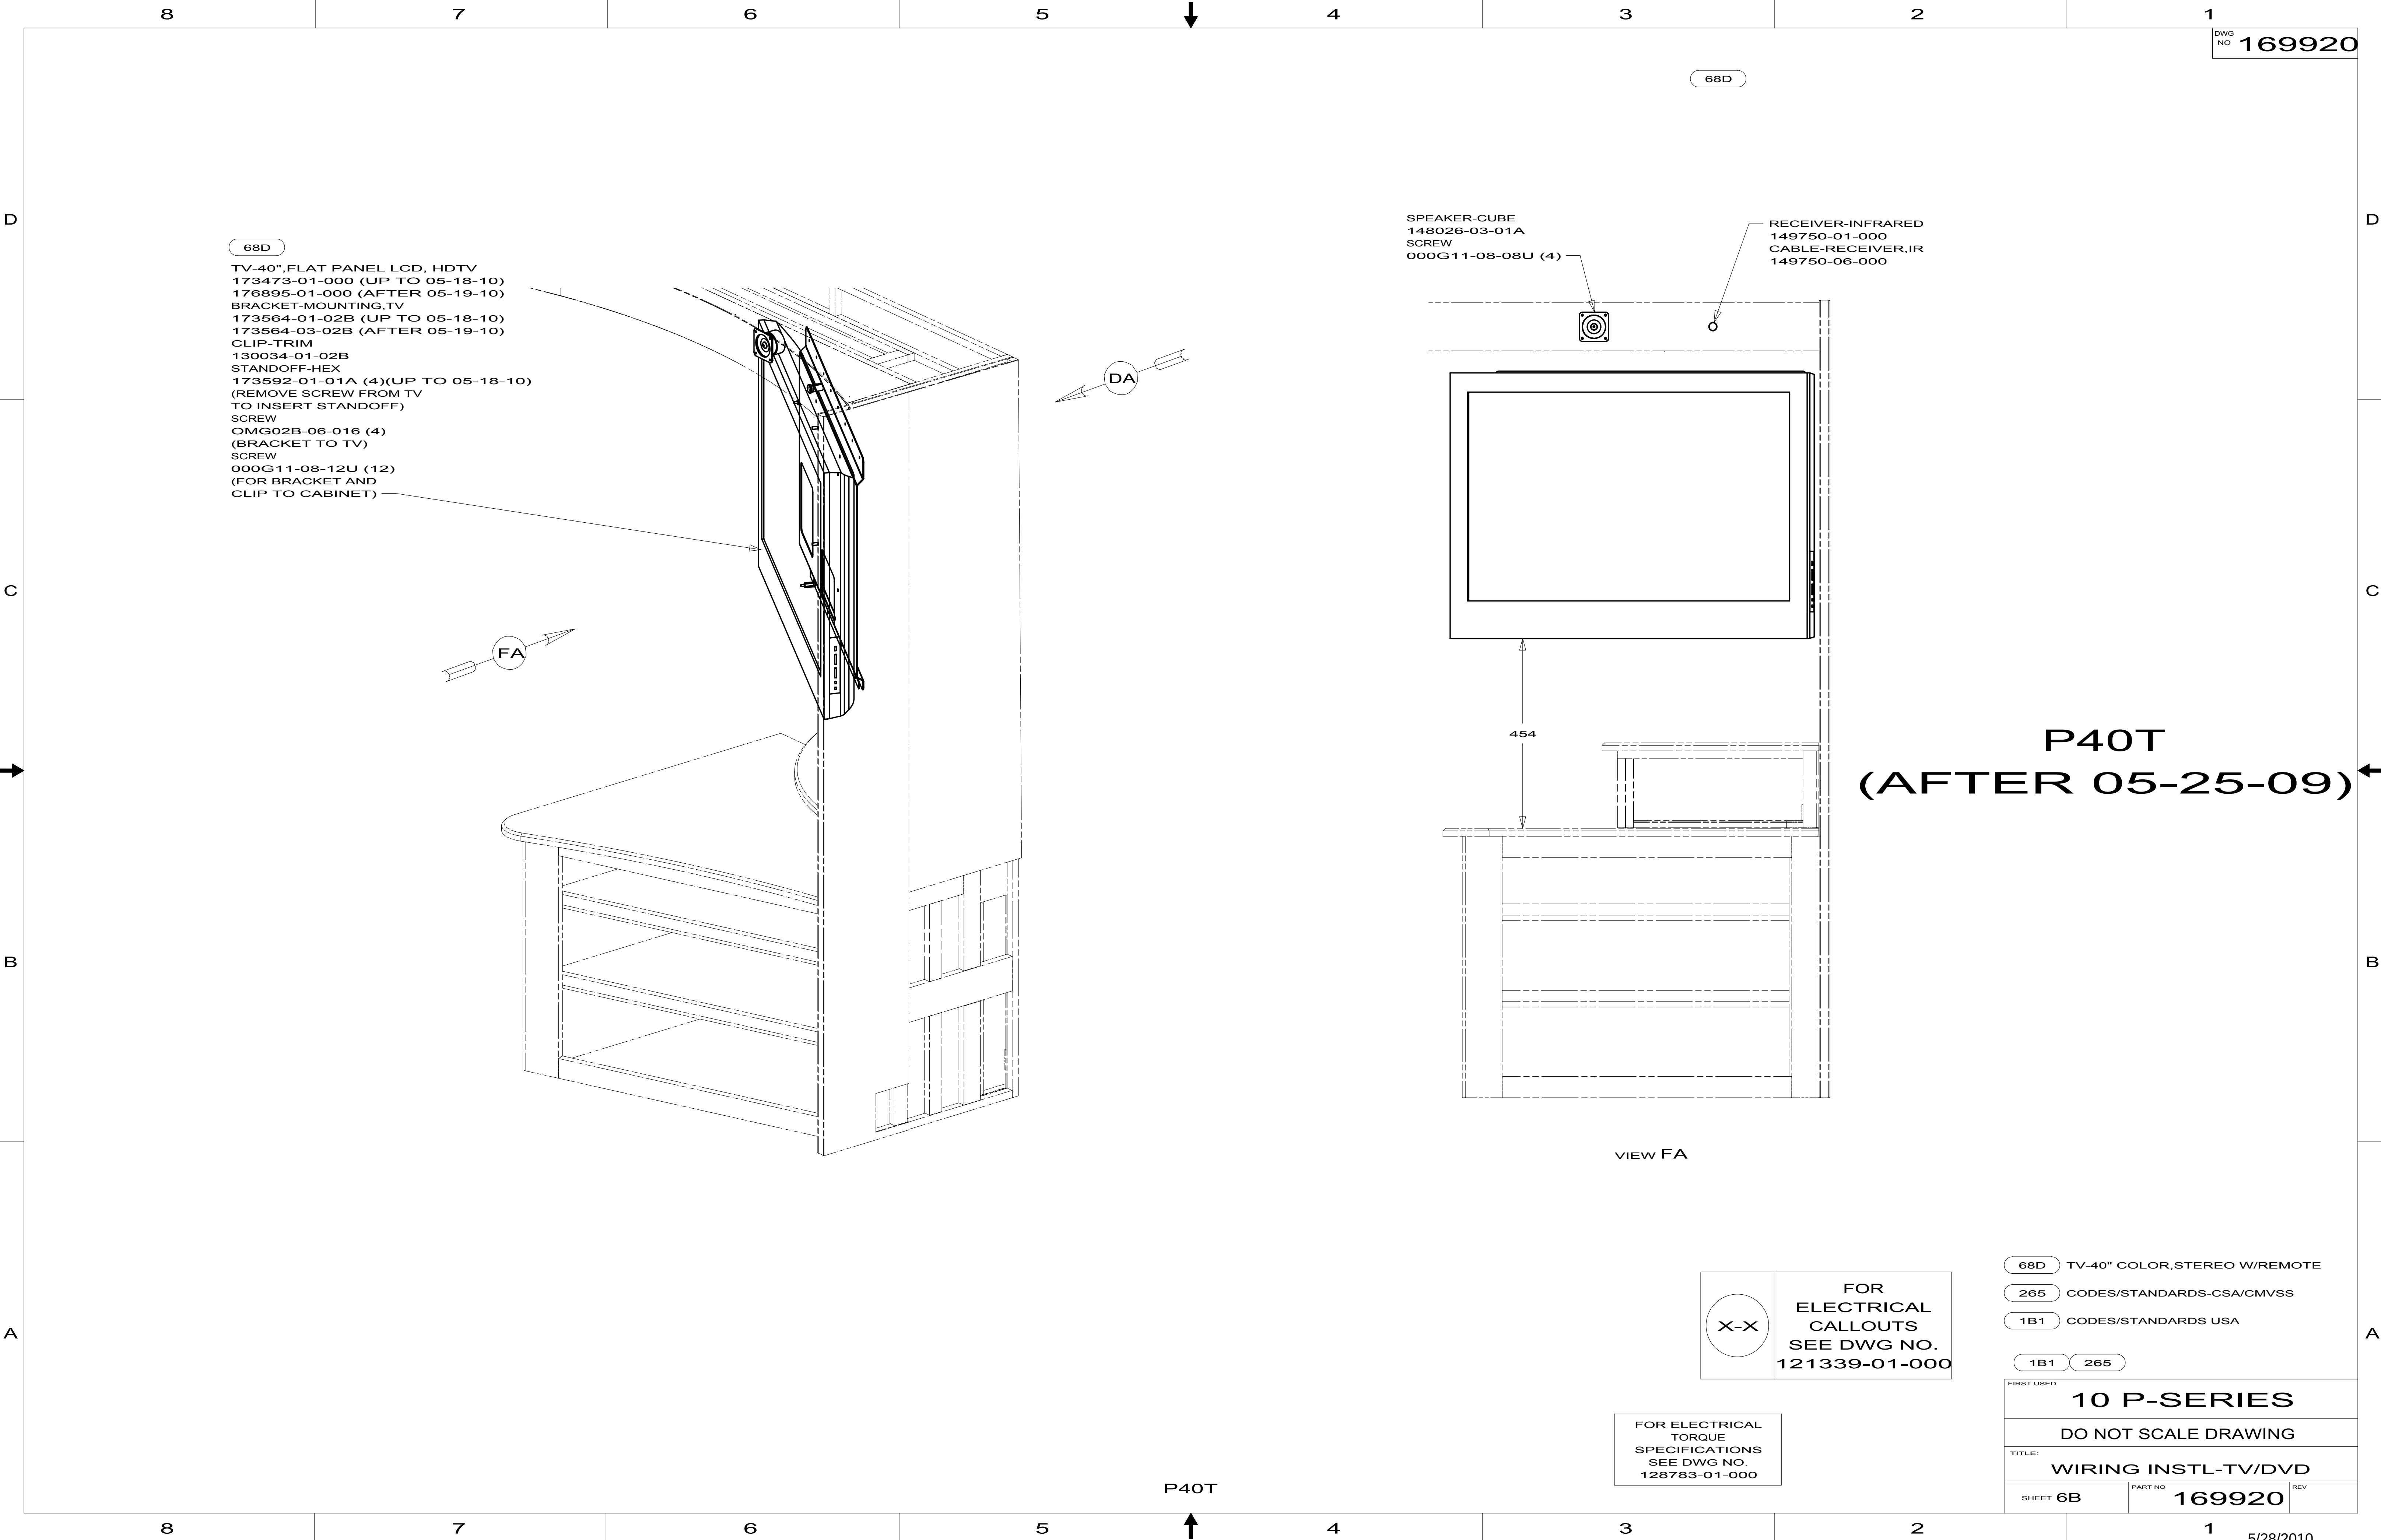P40L & P40T





68D TV-40" COLOR,STEREO W/REMOTE

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

10 P-SERIES

DO NOT SCALE DRAWING

TITLE:

WIRING INSTL-TV/DVD

SHEET 6B

PART NO

169920

REV

KEY	PART NUMBER	U/M	DESCRIPTION
	164270-01-700	EA	REMOTE

164270-01-000
VENDOR NO.
STS2891REM

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	171727-01-700	EA	REMOTE	PR7ATSC