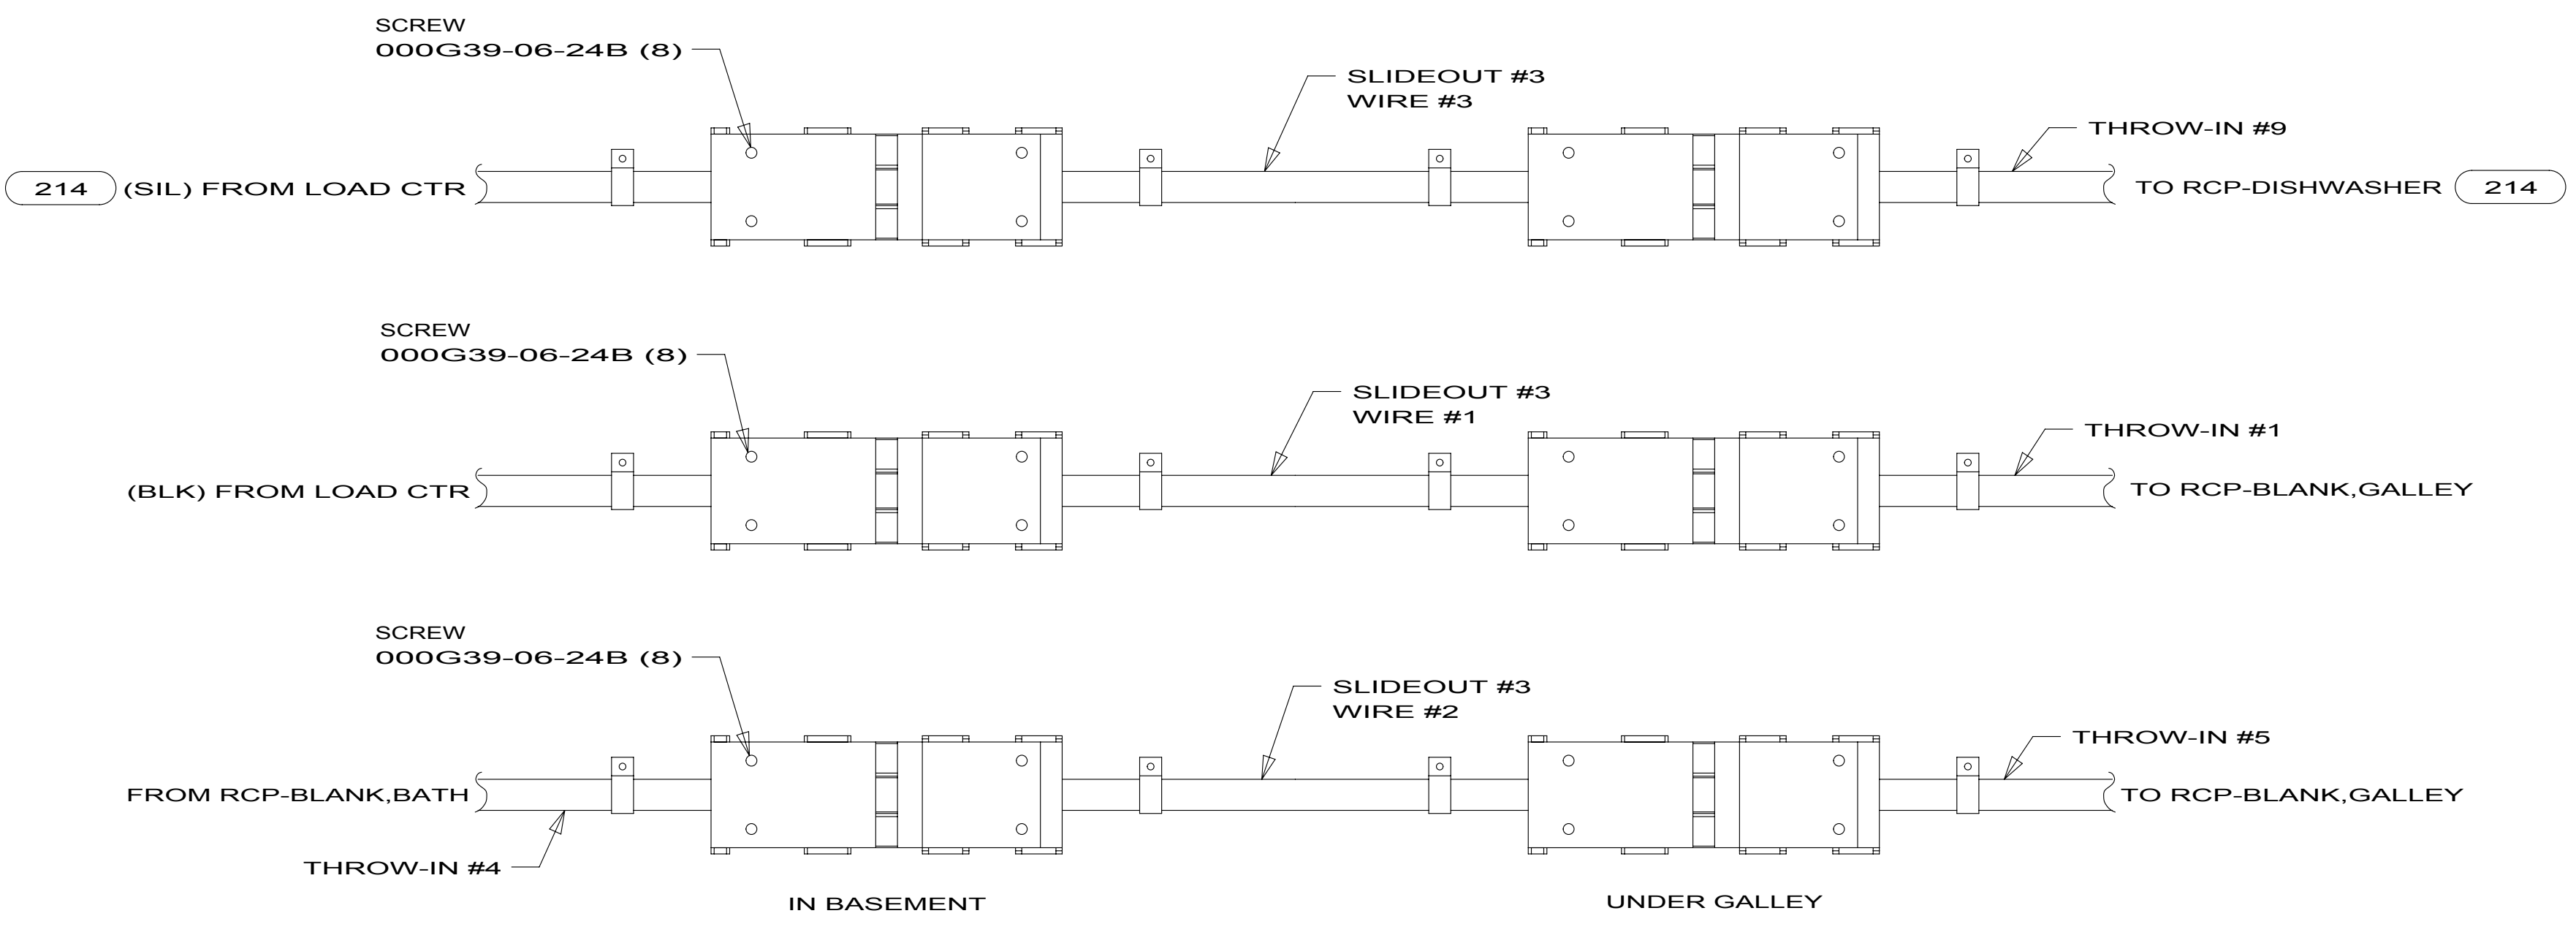
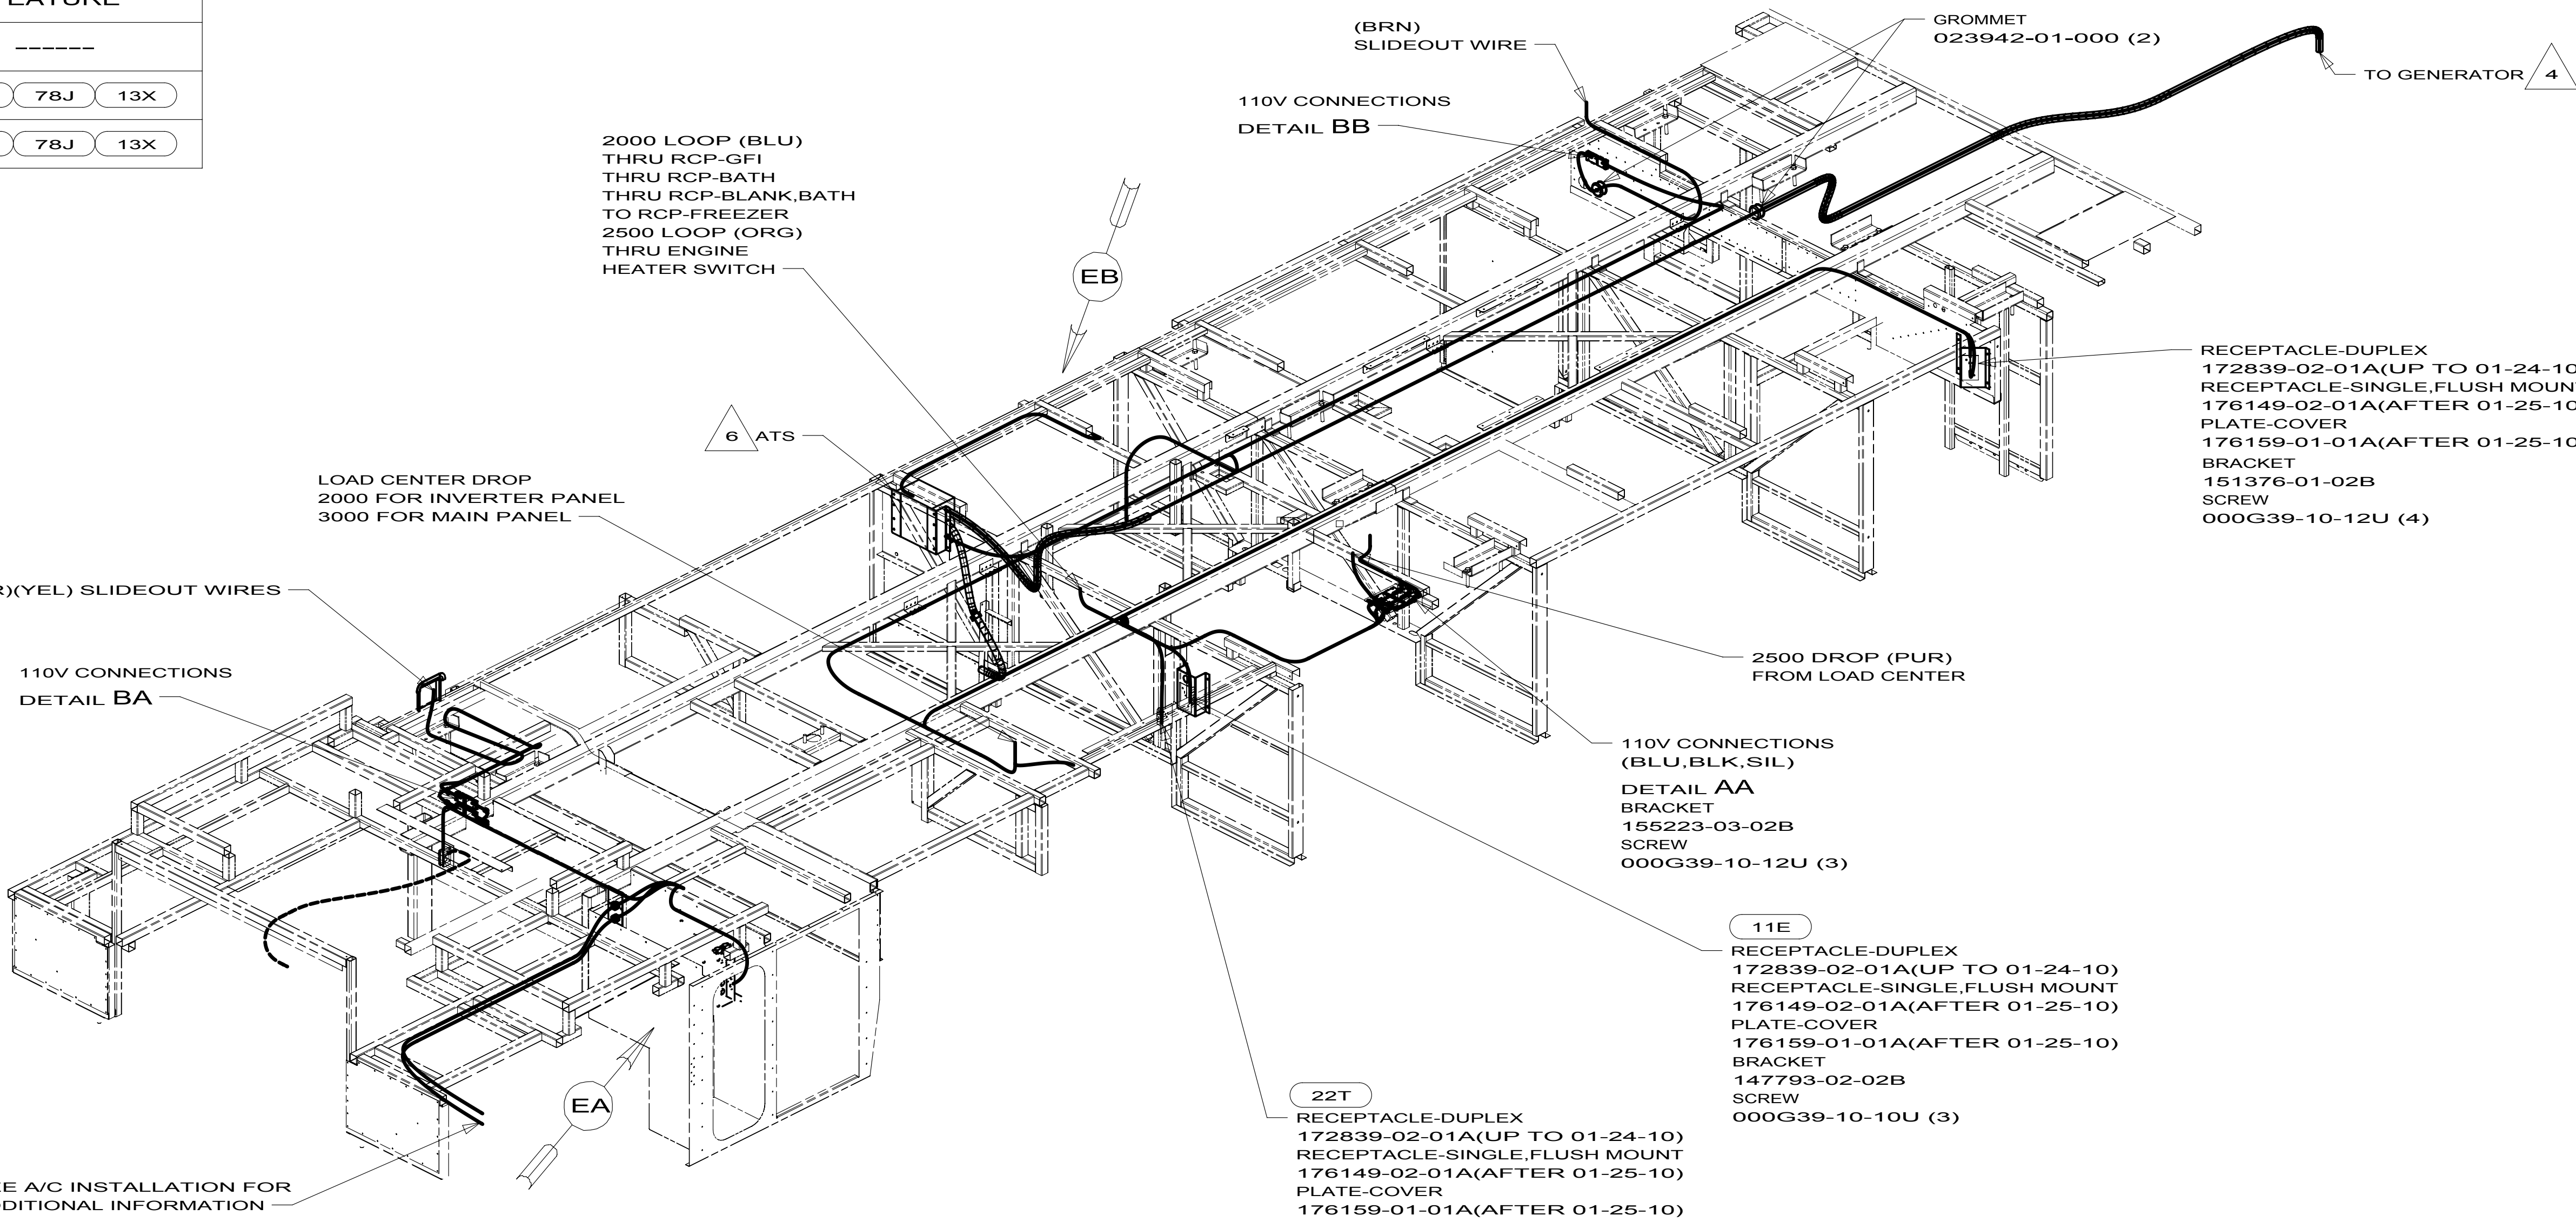


DRAWING NO.	FEATURE
169198-01	-----
169198-14	1B1 78J 13X
169198-18	265 78J 13X



- 7 SEE EXT ENTERTAINMENT CENTER FOR ADDITIONAL INFORMATION.
- 6 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 5 TO ABOVE FLOOR.
- 4 SEE GENERATOR INSTALLATION FOR ADDITIONAL INFORMATION.

- 3. WIRES THAT REST ON WIRE TRAYS ARE TO BE TIED DOWN WITH WIRE TIE 008343-04-000.
- 2. CLAMP TO FLOOR SUPPORT TUBES AS NECESSARY WITH CLAMP 010497-01-000.
- 1. ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


RELEASE	REV DATE	DWG NO	169198
REV ZONE	REVISION RECORD	DATE	DFT-ORIG

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 214 DISHWASHER DRAWER STYLE
- 11F REFRIG/FRZR-PORTABLE WITHOUT
- 11E REFRIGERATOR/FREEZER PORTABL
- 22T VACUUM SYSTEM-CENTRAL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO INDUSTRIES		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFT-ORIG	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHGR			
P.E.			
M.E.	FIRST USED		
DSNR		10 R40CD	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			

DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-BODY, 110V			
SHEET 1 OF 4	PART NO 169198	REV	

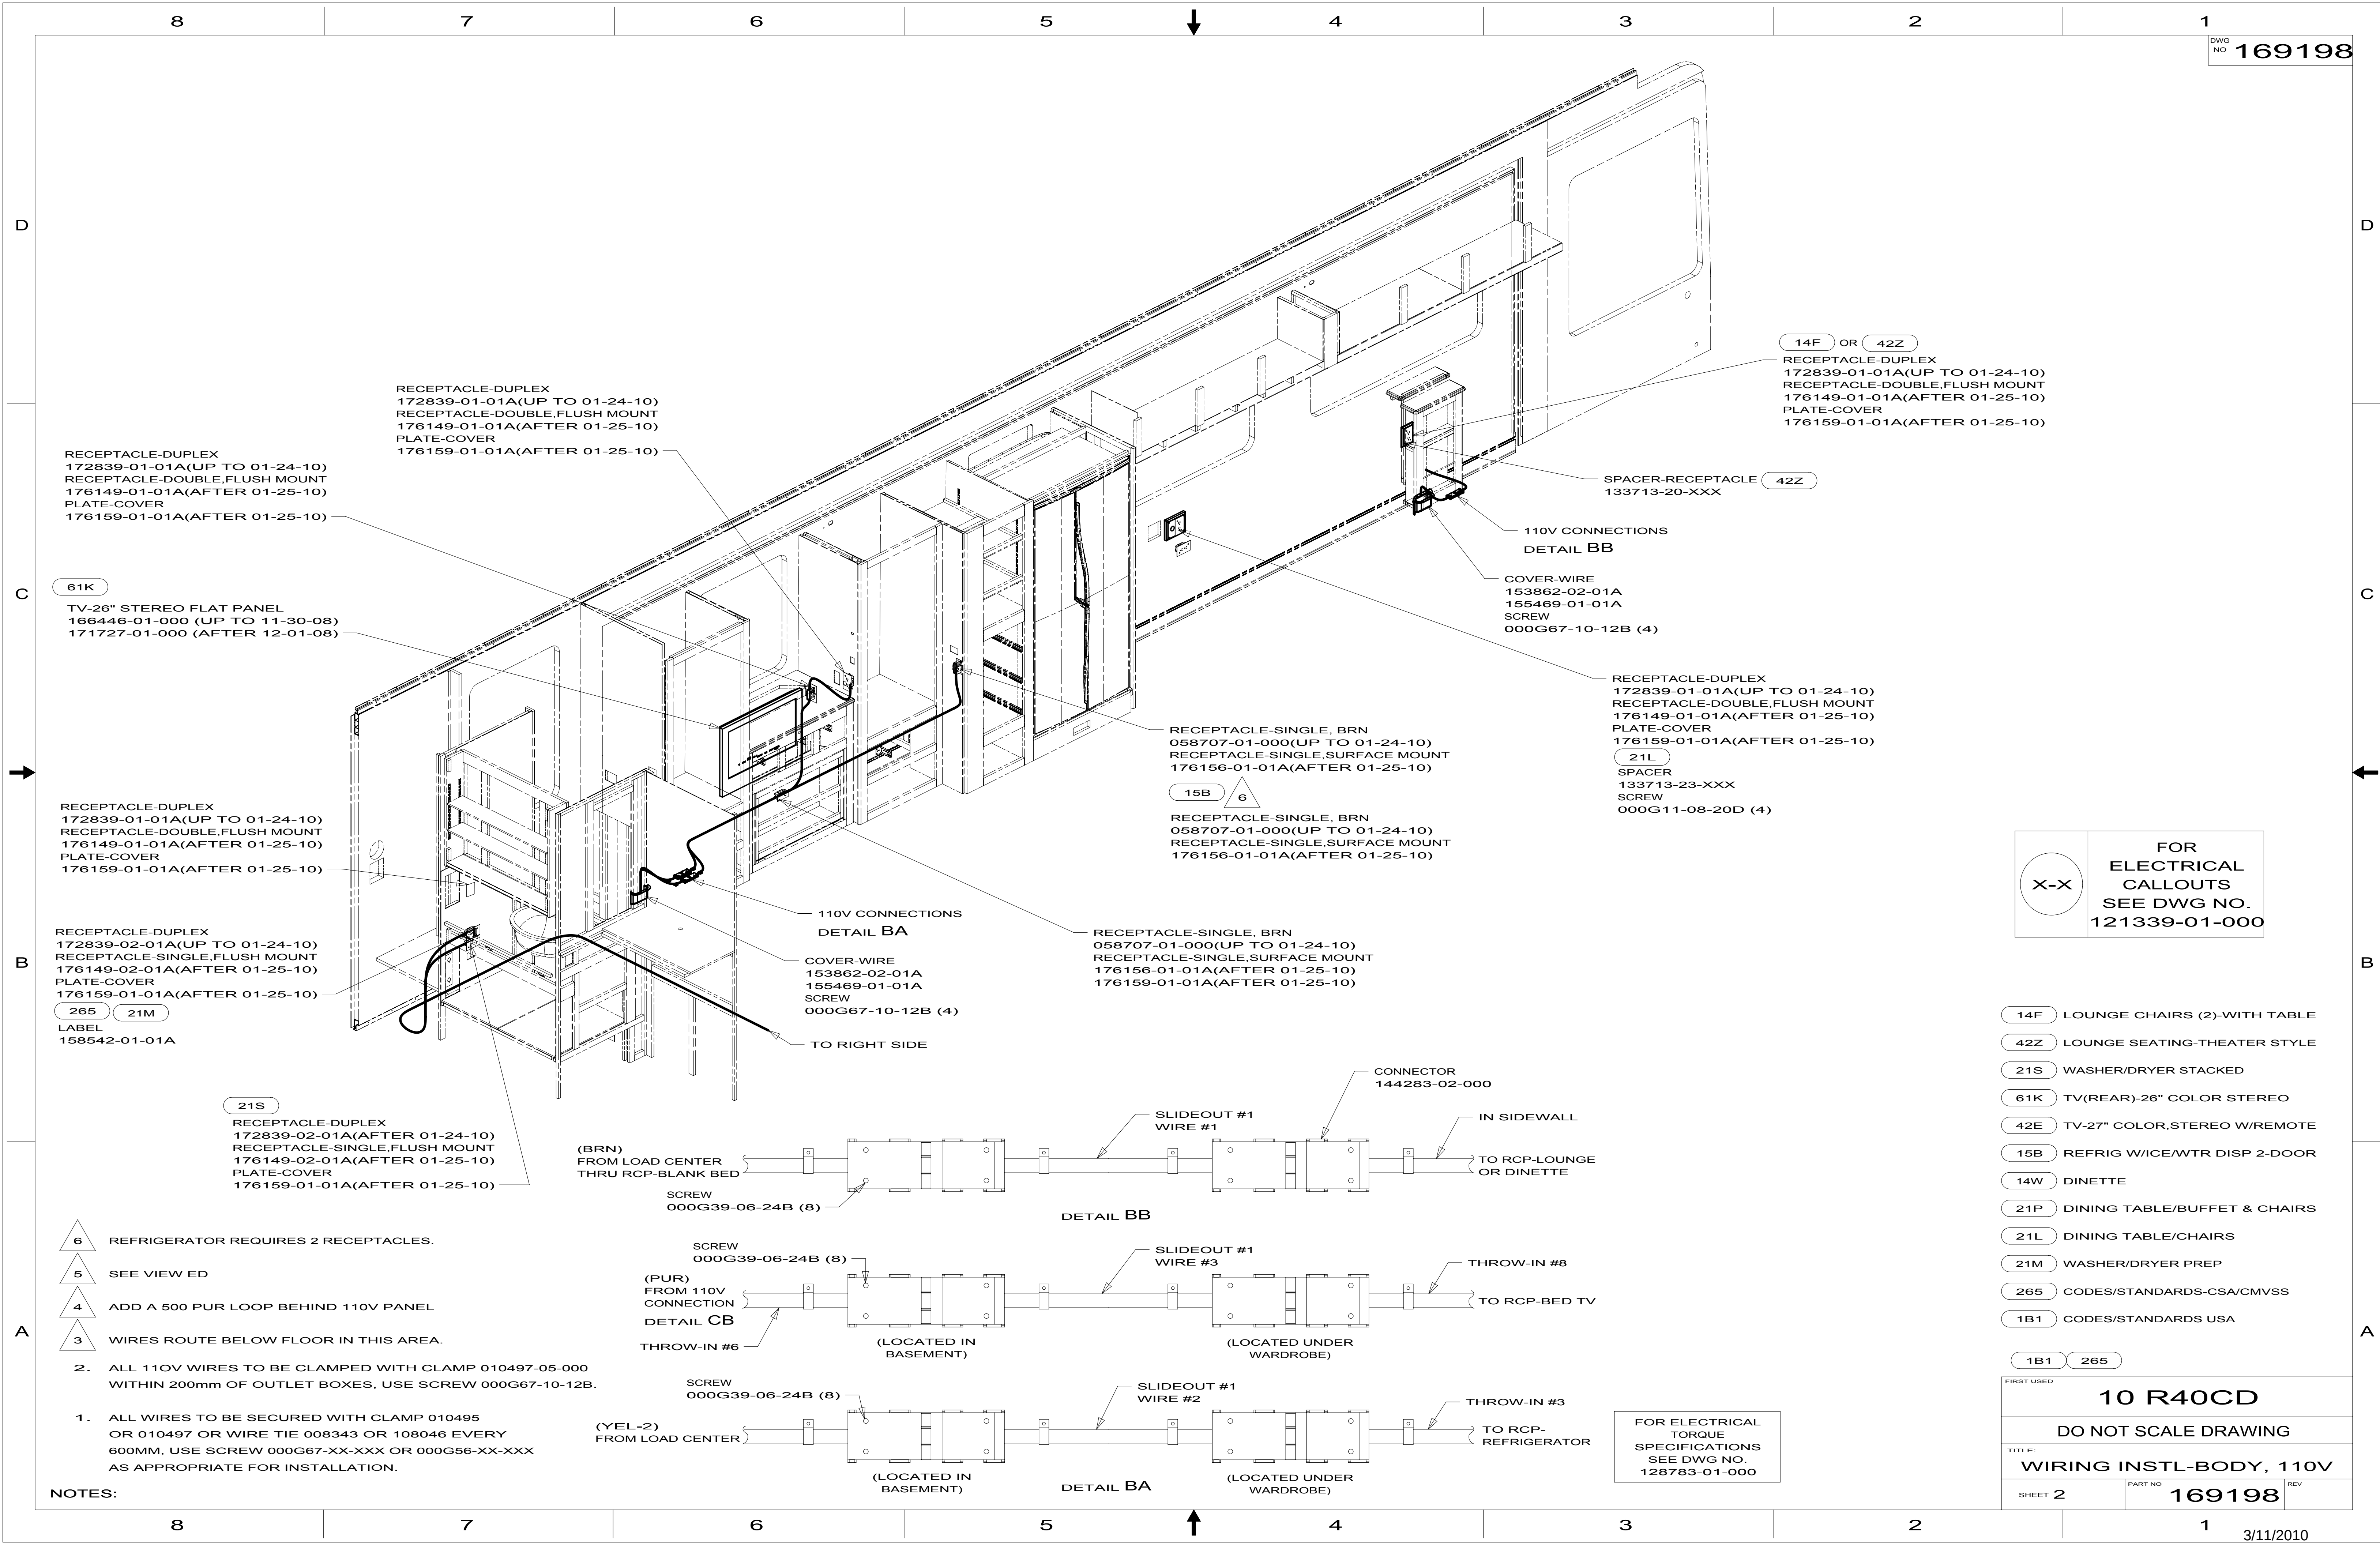

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

- | | |
|-----|------------------------------|
| 14F | LOUNGE CHAIRS (2)-WITH TABLE |
| 42Z | LOUNGE SEATING-THEATER STYLE |
| 21S | WASHER/DRYER STACKED |
| 61K | TV(REAR)-26" COLOR STEREO |
| 42E | TV-27" COLOR,STEREO W/REMOTE |
| 15B | REFRIG W/ICE/WTR DISP 2-DOOR |
| 14W | DINETTE |
| 21P | DINING TABLE/BUFFET & CHAIRS |
| 21L | DINING TABLE/CHAIRS |
| 21M | WASHER/DRYER PREP |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |

1B1 265

10 R40CD



DO NOT SCALE DRAWING

TITLE: WIRING INSTL-BODY, 110V

SHEET 2

PART NO

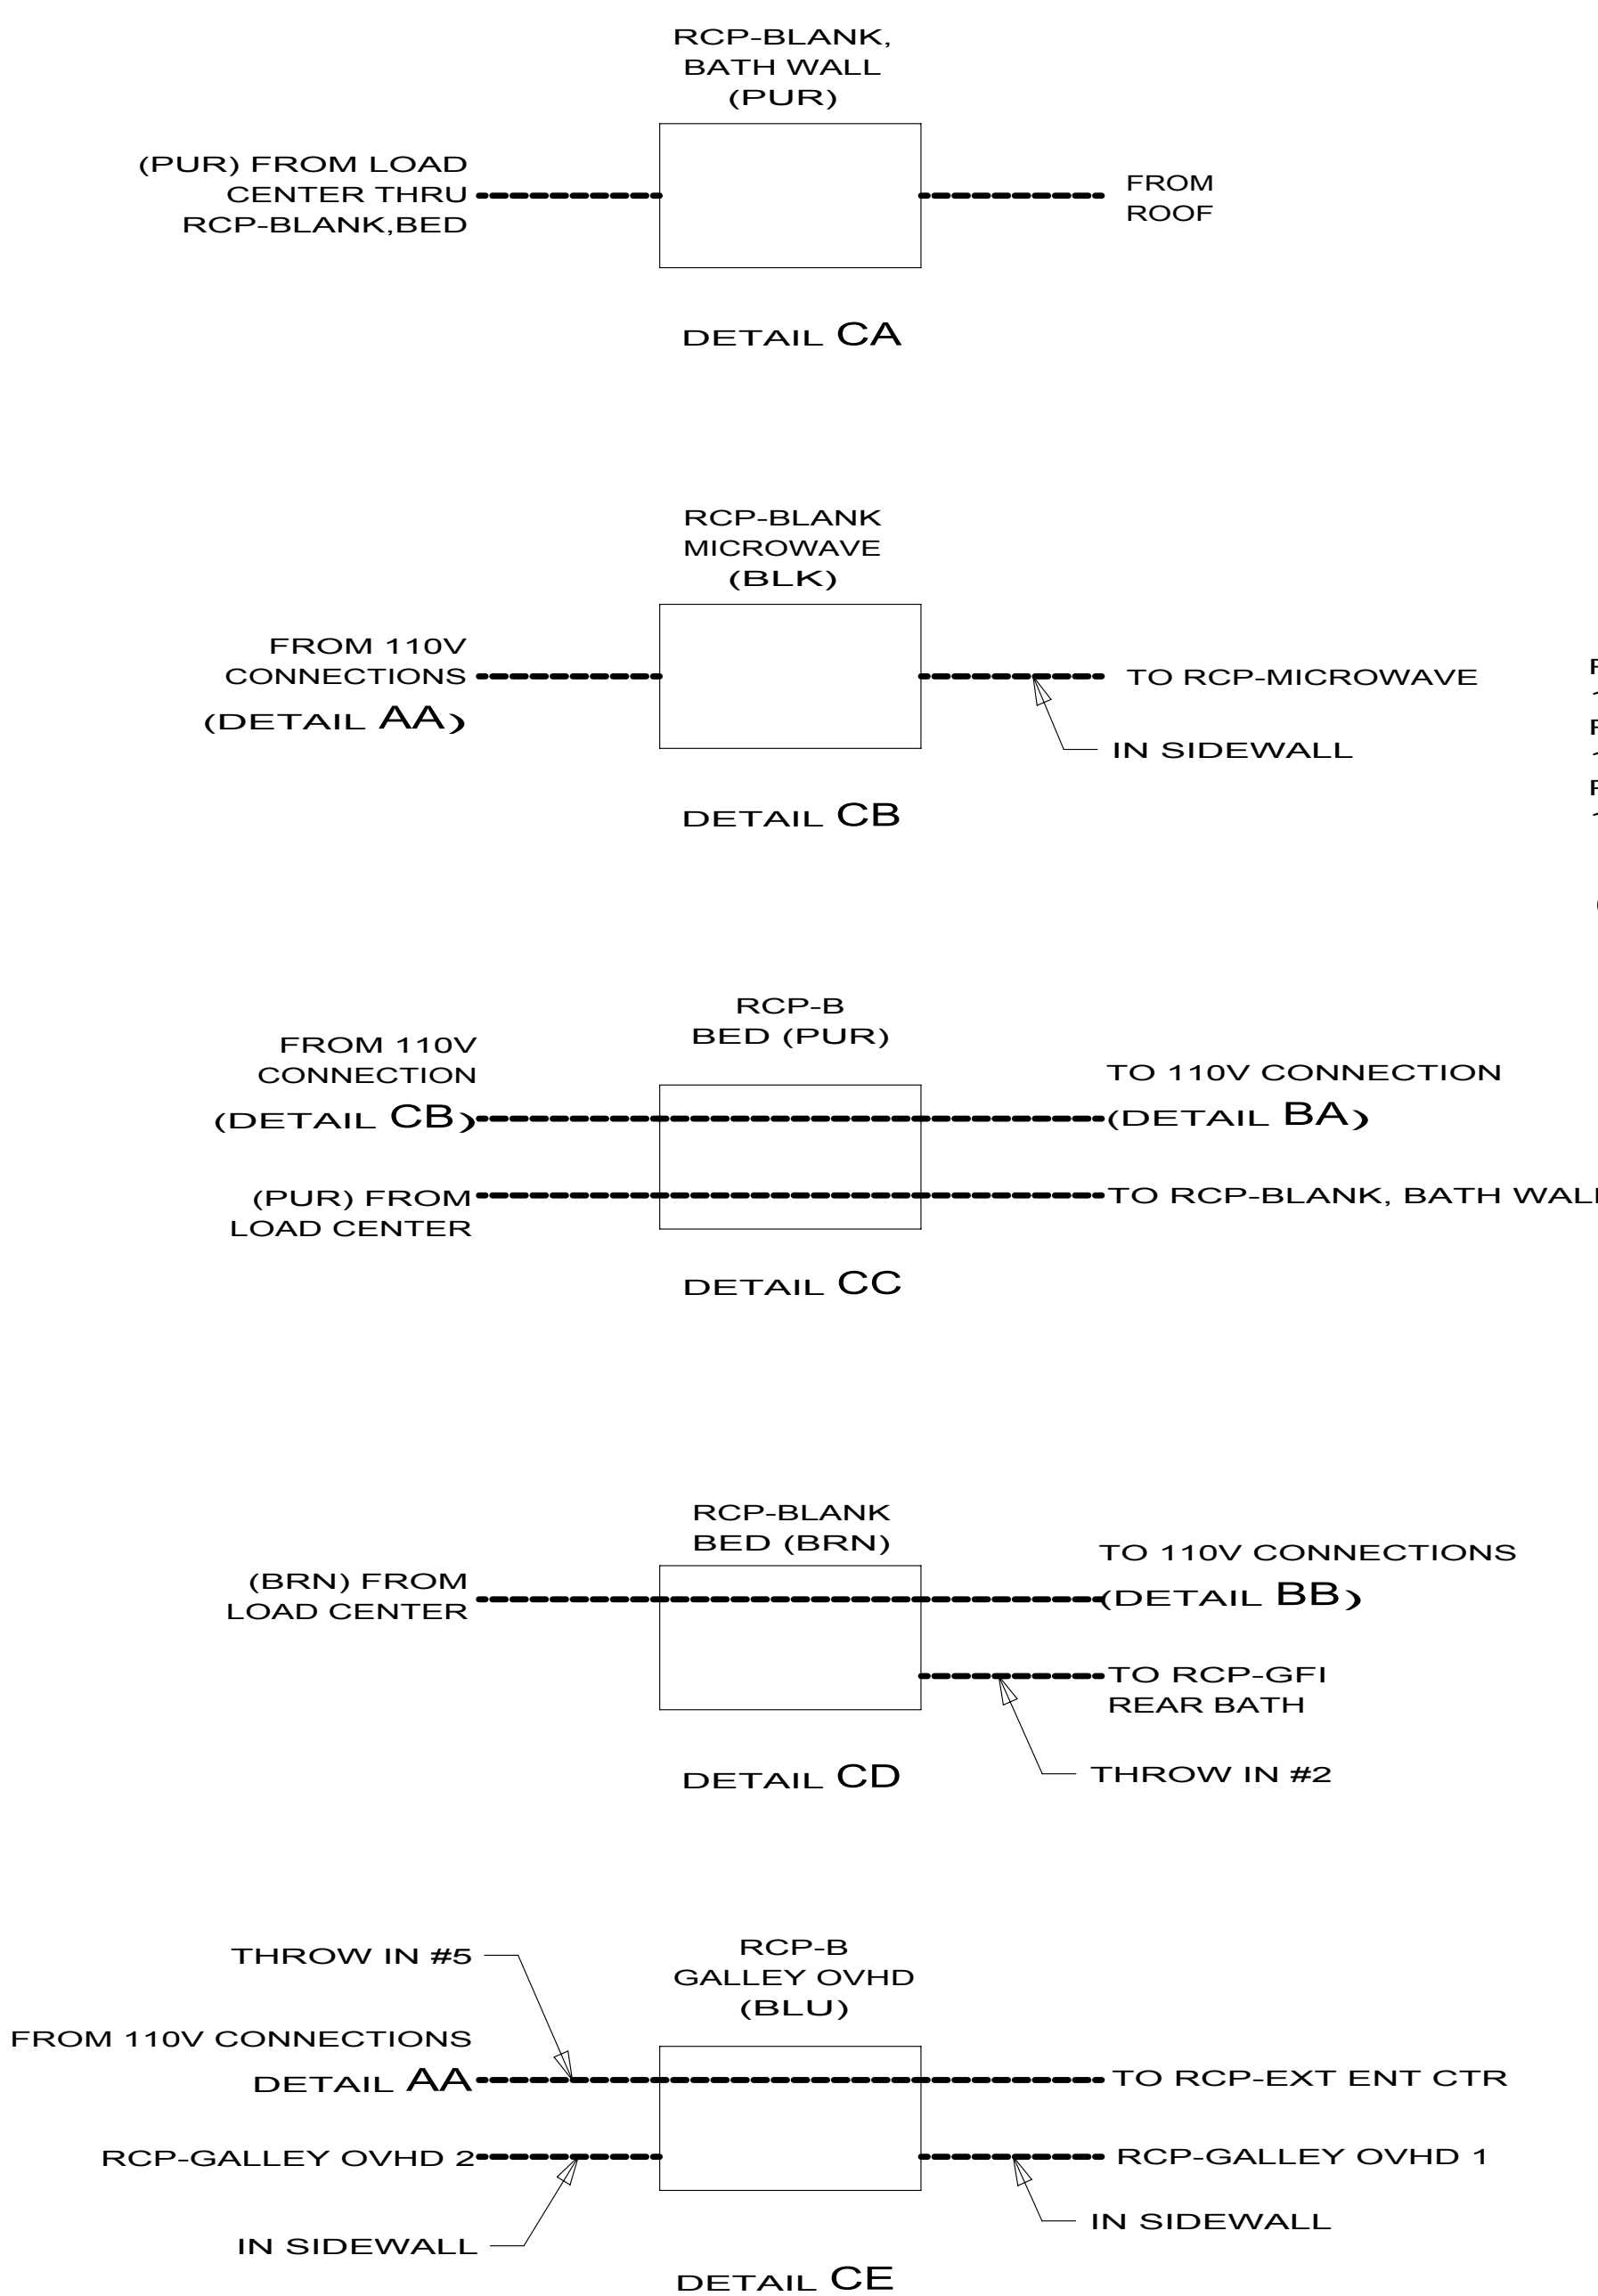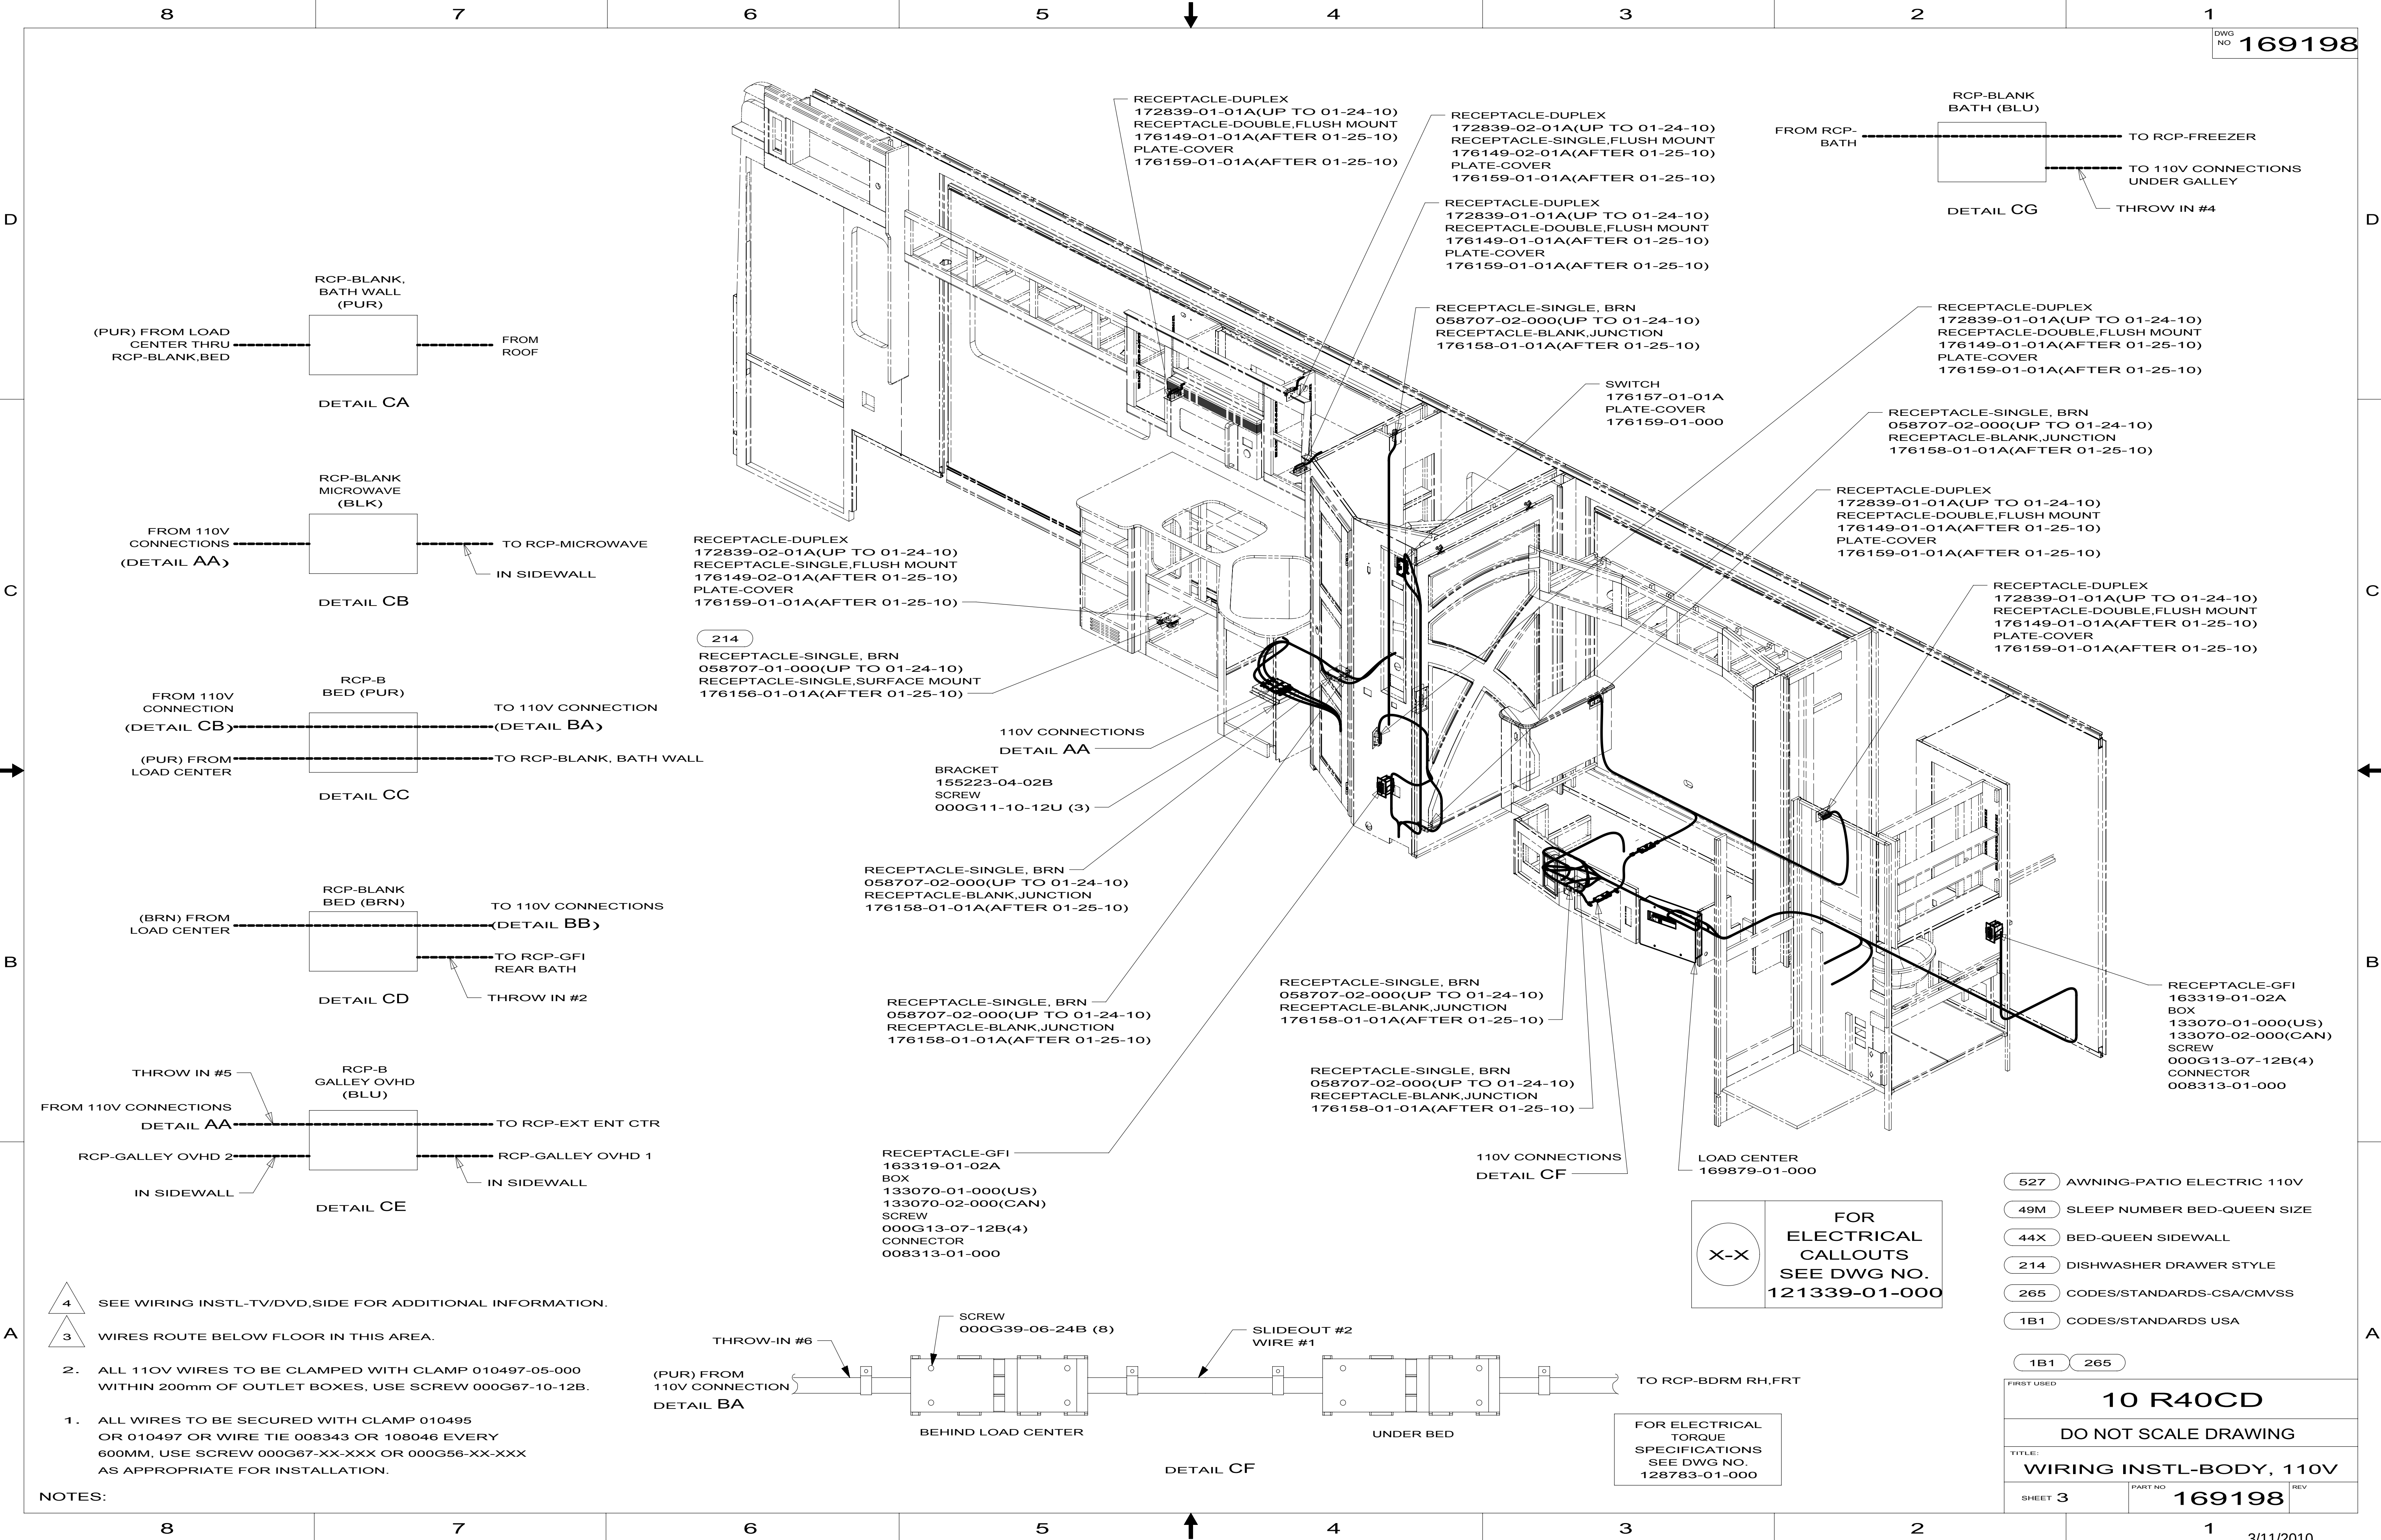169198



RECEPTACLE-DUPLEX 172839-02-01A(UP TO 01-24-10)
RECEPTACLE-SINGLE,FLUSH MOUNT 176149-02-01A(AFTER 01-25-10)
PLATE-COVER 176159-01-01A(AFTER 01-25-10)

214
RECEPTACLE-SINGLE, BRN 058707-01-000(UP TO 01-24-10)
RECEPTACLE-SINGLE,SURFACE MOUNT 176156-01-01A(AFTER 01-25-10)

110V CONNECTIONS
DETAIL AA
BRACKET 155223-04-02B
SCREW 000G11-10-12U (3)

RECEPTACLE-SINGLE, BRN 058707-02-000(UP TO 01-24-10)
RECEPTACLE-BLANK,JUNCTION 176158-01-01A(AFTER 01-25-10)

RECEPTACLE-SINGLE, BRN 058707-02-000(UP TO 01-24-10)
RECEPTACLE-BLANK,JUNCTION 176158-01-01A(AFTER 01-25-10)

RECEPTACLE-GFI 163319-01-02A
BOX 133070-01-000(US)
133070-02-000(CAN)
SCREW 000G13-07-12B(4)
CONNECTOR 008313-01-000

RECEPTACLE-DUPLEX 172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE,FLUSH MOUNT 176149-01-01A(AFTER 01-25-10)
PLATE-COVER 176159-01-01A(AFTER 01-25-10)

RECEPTACLE-DUPLEX 172839-02-01A(UP TO 01-24-10)
RECEPTACLE-SINGLE,FLUSH MOUNT 176149-02-01A(AFTER 01-25-10)
PLATE-COVER 176159-01-01A(AFTER 01-25-10)

RECEPTACLE-DUPLEX 172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE,FLUSH MOUNT 176149-01-01A(AFTER 01-25-10)
PLATE-COVER 176159-01-01A(AFTER 01-25-10)

RECEPTACLE-SINGLE, BRN 058707-02-000(UP TO 01-24-10)
RECEPTACLE-BLANK,JUNCTION 176158-01-01A(AFTER 01-25-10)

SWITCH 176157-01-01A
PLATE-COVER 176159-01-000

RECEPTACLE-SINGLE, BRN 058707-02-000(UP TO 01-24-10)
RECEPTACLE-BLANK,JUNCTION 176158-01-01A(AFTER 01-25-10)

RECEPTACLE-DUPLEX 172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE,FLUSH MOUNT 176149-01-01A(AFTER 01-25-10)
PLATE-COVER 176159-01-01A(AFTER 01-25-10)

RECEPTACLE-DUPLEX 172839-01-01A(UP TO 01-24-10)
RECEPTACLE-DOUBLE,FLUSH MOUNT 176149-01-01A(AFTER 01-25-10)
PLATE-COVER 176159-01-01A(AFTER 01-25-10)

RECEPTACLE-SINGLE, BRN 058707-02-000(UP TO 01-24-10)
RECEPTACLE-BLANK,JUNCTION 176158-01-01A(AFTER 01-25-10)

RECEPTACLE-SINGLE, BRN 058707-02-000(UP TO 01-24-10)
RECEPTACLE-BLANK,JUNCTION 176158-01-01A(AFTER 01-25-10)

110V CONNECTIONS
DETAIL CF

LOAD CENTER 169879-01-000

RECEPTACLE-GFI 163319-01-02A
BOX 133070-01-000(US)
133070-02-000(CAN)
SCREW 000G13-07-12B(4)
CONNECTOR 008313-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

- 527 AWNING-PATIO ELECTRIC 110V
- 49M SLEEP NUMBER BED-QUEEN SIZE
- 44X BED-QUEEN SIDEWALL
- 214 DISHWASHER DRAWER STYLE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FIRST USED		
10 R40CD		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 3	PART NO 169198	REV

- 4 SEE WIRING INSTL-TV/DVD,SIDE FOR ADDITIONAL INFORMATION.
- 3 WIRES ROUTE BELOW FLOOR IN THIS AREA.
2. ALL 110V WIRES TO BE CLAMPED WITH CLAMP 010497-05-000 WITHIN 200mm OF OUTLET BOXES, USE SCREW 000G67-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

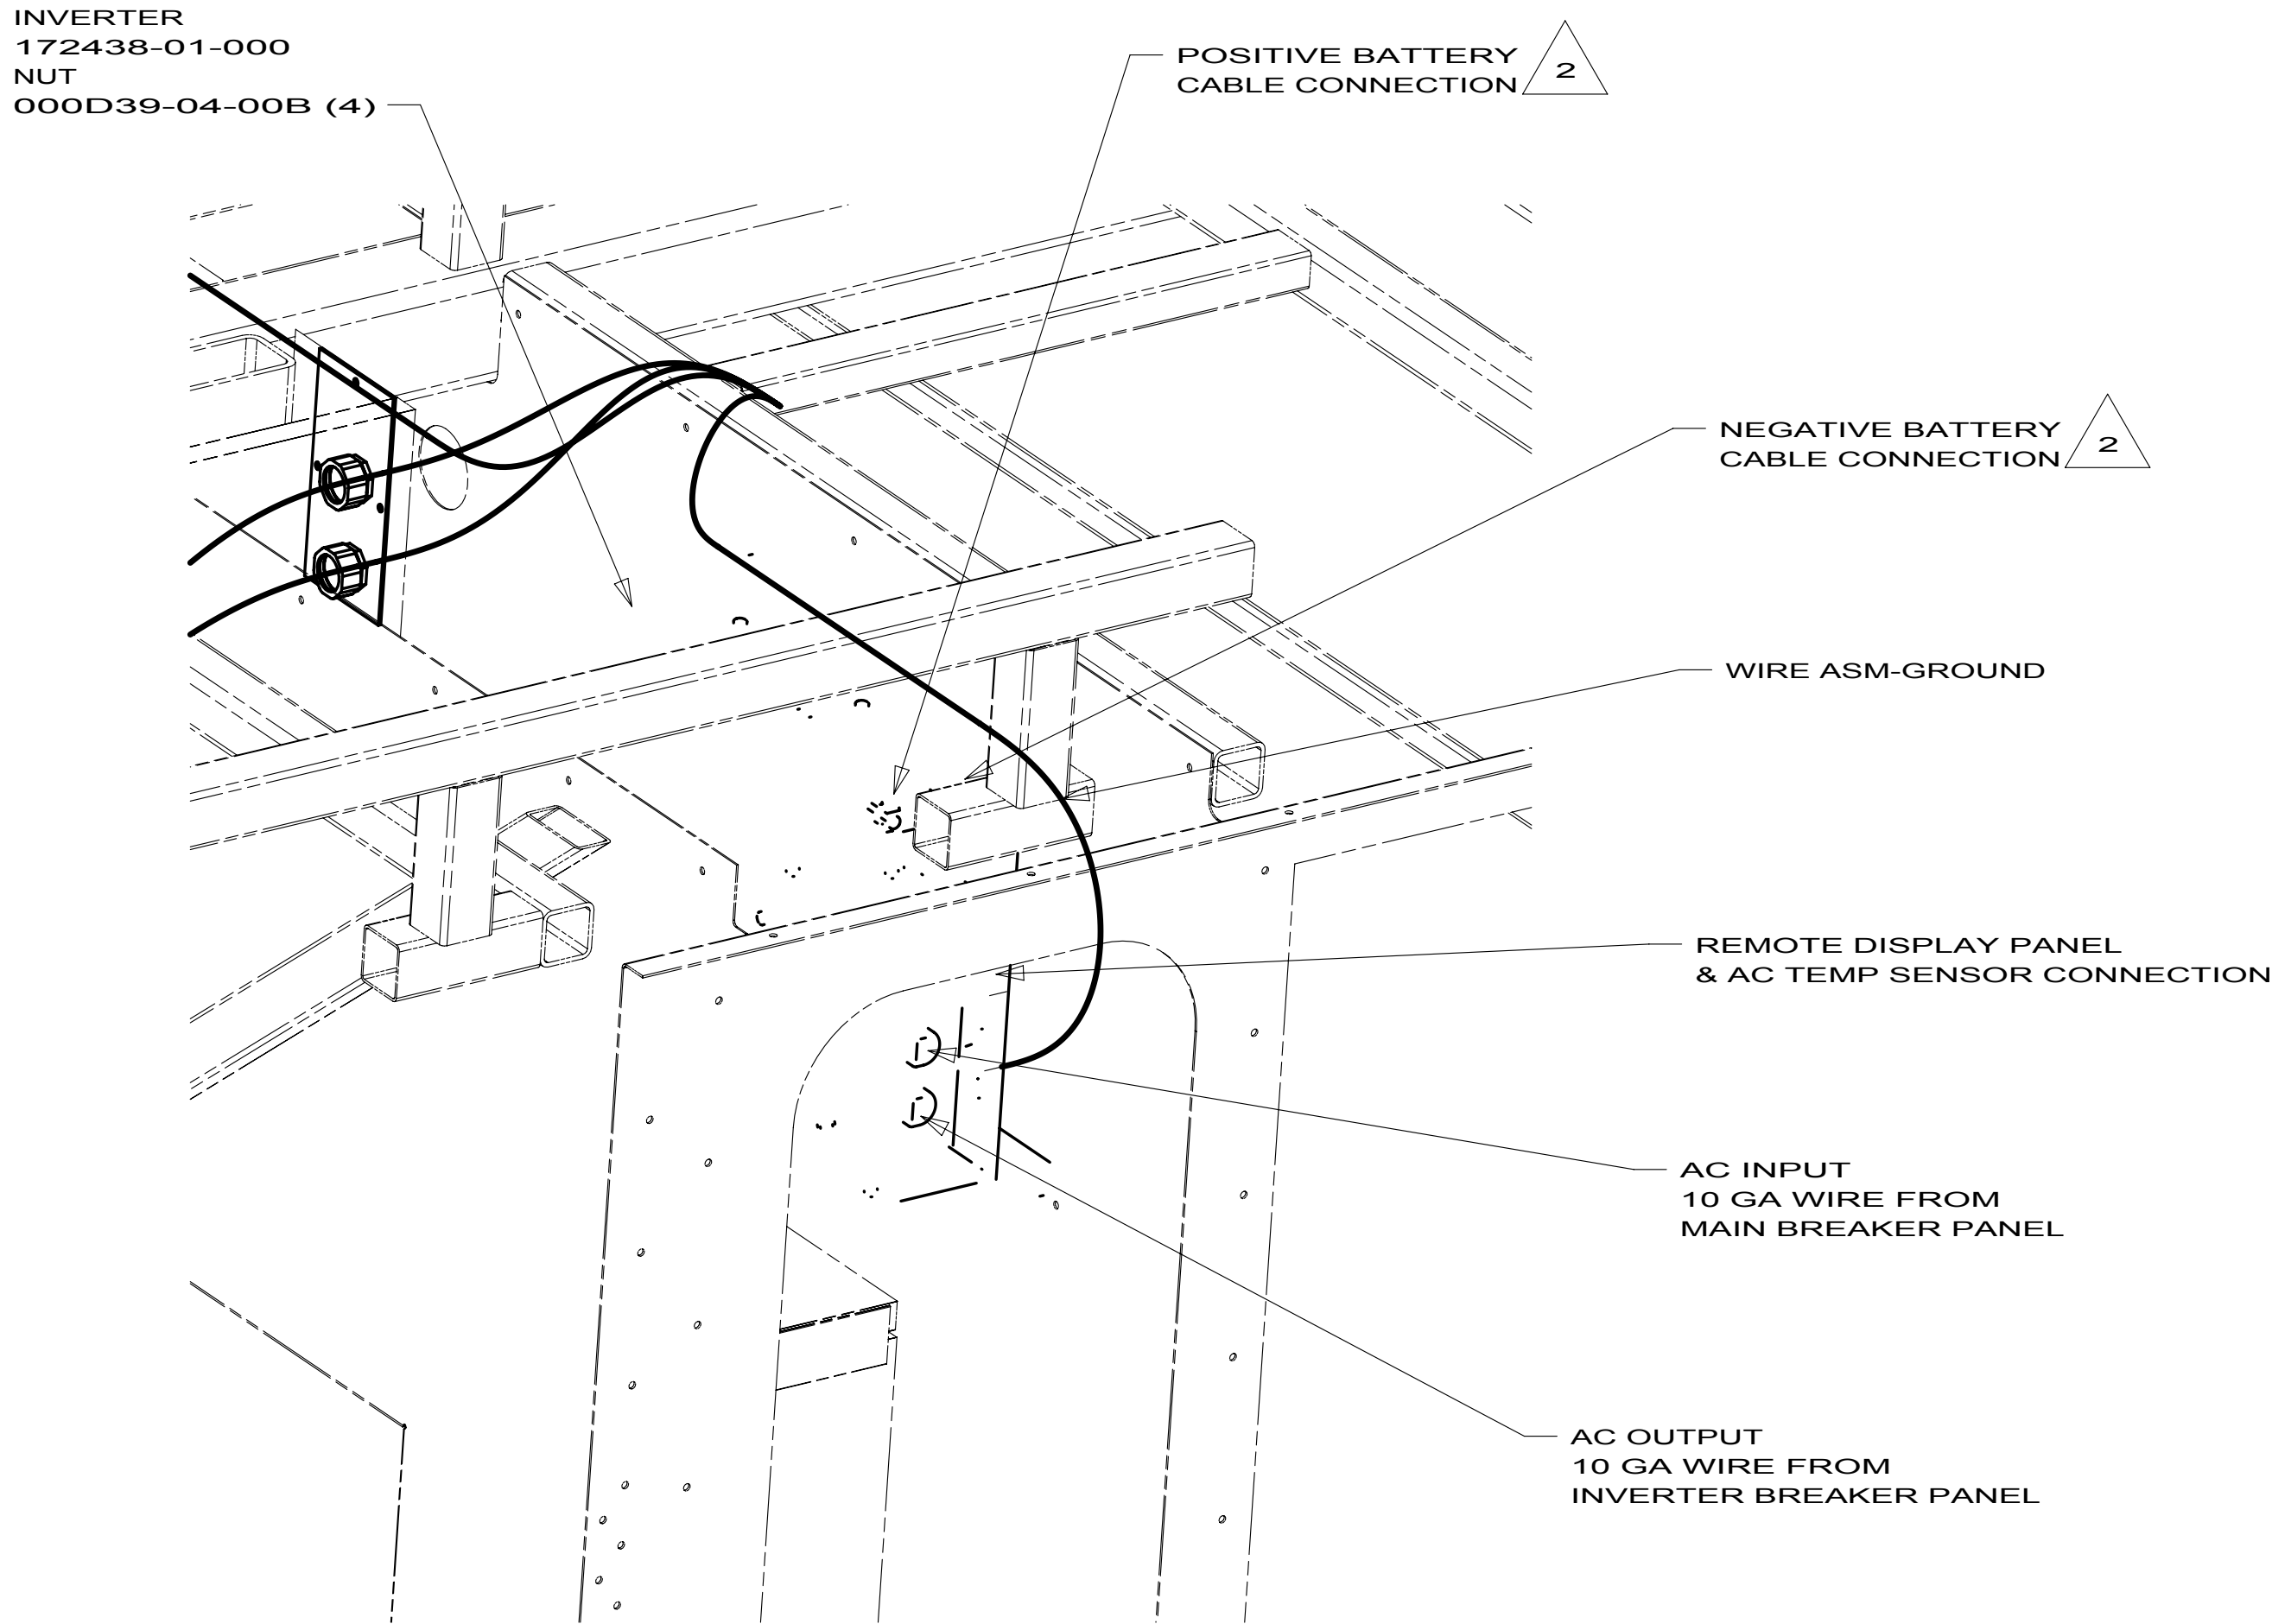NOTES:



VIEW EA

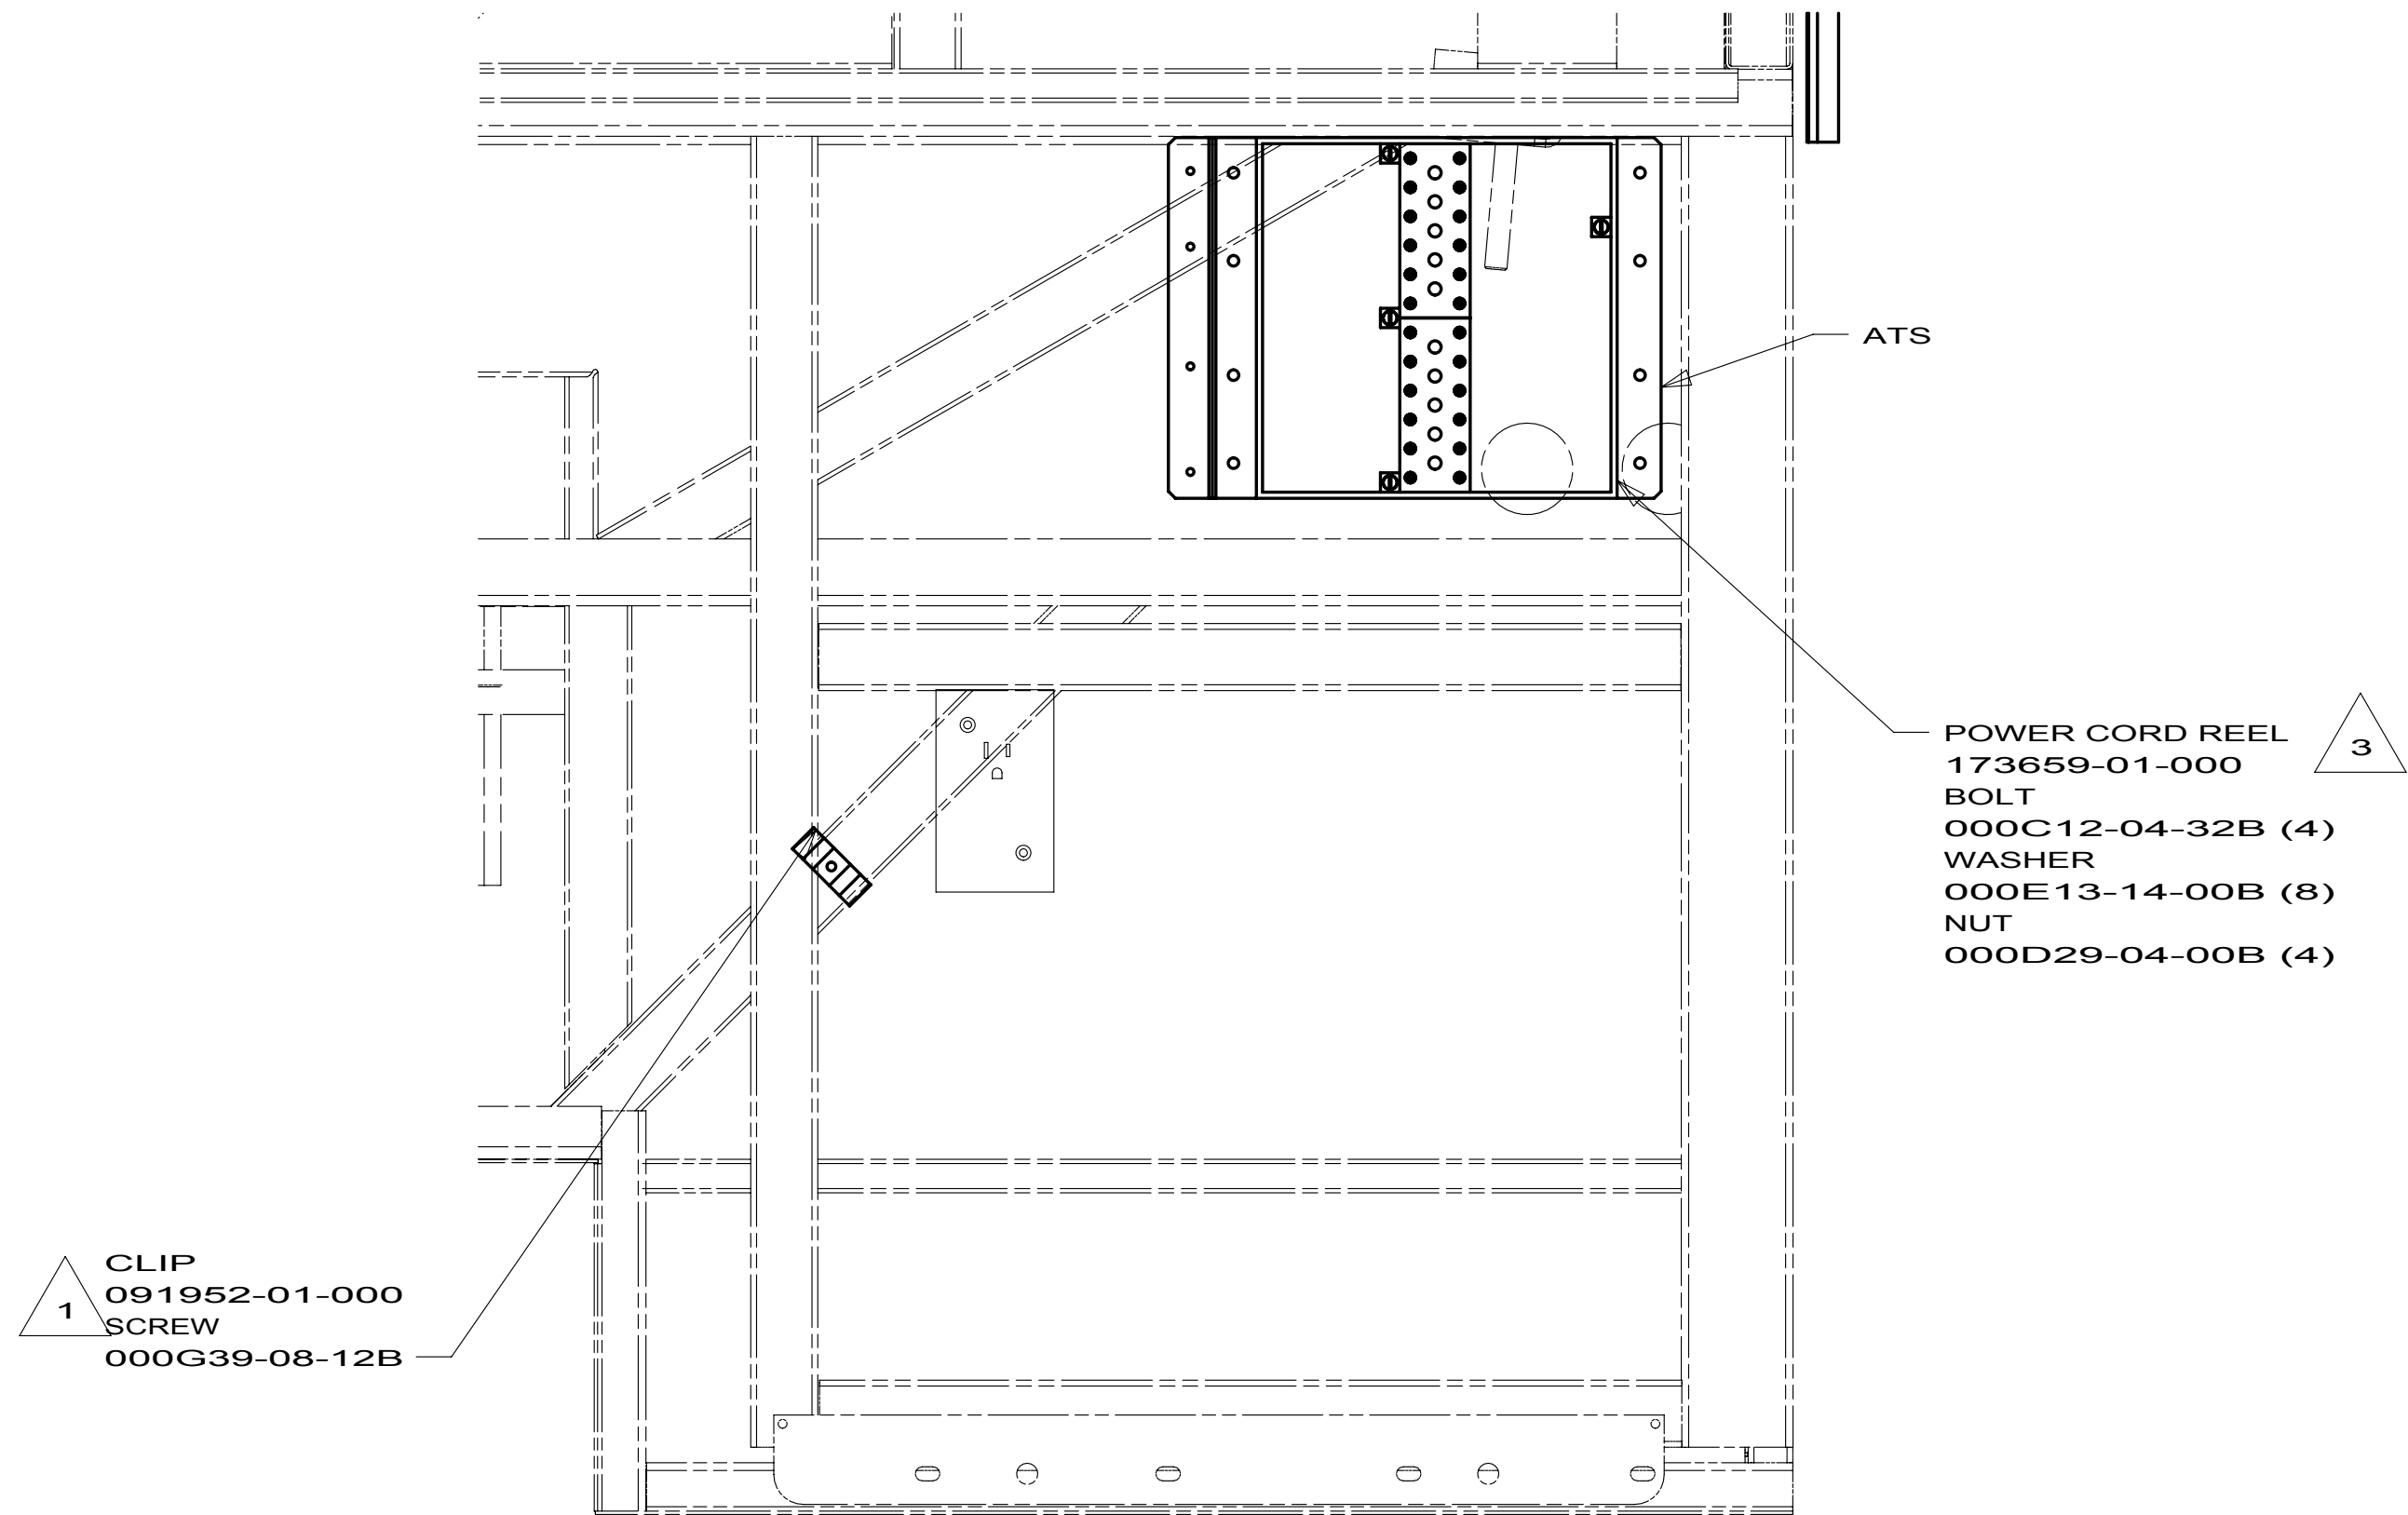

VIEW EB 12F

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- NOTES:
- 4 CONNECT LIKE COLORS TOGETHER RED-RED, BLK-BLK, WHT-WHT, GRN-GRN.
 - 3 INSERT BOLT FROM BOTTOM OF COMPARTMENT.
 - 2 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
 - 1 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- 12F POWER CORD REEL
- 61K TV(REAR)-26" COLOR STEREO
- 42E TV-27" COLOR,STEREO W/REMOTE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 R40CD		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 4	PART NO 169198	REV

144858-03-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	144858-01-700	EA POWER HEAD	04017
	144858-01-702	EA COLLAR F/POWER CORD	85446
	144858-01-703	EA MOTOR W/DRIVE GEAR	20409 W/52405
	144858-01-704	EA CONTAINER F/POWER CORD	85448
	144858-01-705	EA CAGE/REEL	19700-1
	144858-01-706	EA HITCH PIN	70405
	144858-01-707	EA CLEVIS PIN	70406
	144858-01-708	EA ROLLER	85459 - 1 ONLY
	144858-01-709	EA POWER SWITCH	19702

8

DRAWING NO.

MODEL

SHEETS

169879-01

R40WD

1,2,3

169879-02

R40CD

1,2,3

169879-03

R40BD

1,2,3

169879-04

R42AD

1,2,4

7

R40WD

R40CD

R40BD

R42AD

RED

12-UL

136135-07-080

136135-07-080

136135-07-056

136135-07-102

12-CA

136136-07-080

136136-07-080

136136-07-056

136136-07-102

MAIN

4-3 UL

136141-01-070

136141-01-070

136141-01-074

136139-01-057

4-3 CA

136142-01-070

136142-01-070

136142-01-074

136140-01-057

GRN

12-UL

136135-08-080

136135-08-080

136135-08-056

136135-08-102

12-CA

136136-08-080

136136-08-080

136136-08-056

136136-08-102

LT BLU

12-UL

136135-21-102

12-CA

136136-21-102

INVERTER CHARGER MAIN

10-UL

136137-01-077

136137-01-037

136137-01-035

136137-01-054

10-CA

136138-01-077

136138-01-037

136138-01-035

136138-01-054

YEL

14-UL

136131-05-070

136131-05-062

136131-05-044

136131-05-063

14-CA

136134-05-070

136134-05-062

136134-05-044

136134-05-063

YEL-2

14-UL

136131-13-077

136131-13-046

136131-13-102

136131-13-100

14-CA

136134-13-077

136134-13-046

136134-13-102

136134-13-100

YEL-3

14-UL

136131-17-020

136131-17-036

136131-17-020

14-CA

136134-17-020

136134-17-036

136134-17-020

GLD

12-UL

136135-10-075

136135-10-078

136135-10-072

136135-10-090

12-CA

136136-10-075

136136-10-078

136136-10-072

136136-10-090

GLD

14-UL

136131-10-078

136131-10-072

136131-10-090

14-CA

136134-10-078

136134-10-072

136134-10-090

GLD-2

14-UL

136131-20-078

136131-20-072

136131-20-090

14-CA

136134-20-078

136134-20-072

136134-20-090

WHT

12-UL

136135-09-065

136135-09-085

136135-09-074

136135-09-073

12-CA

136136-09-065

136136-09-085

136136-09-074

136136-09-073

22T

54E

21M

21S

21S

INVERTER CHARGER SUB MAIN

10-UL

136137-01-077

136137-01-046

136137-01-035

136137-01-054

10-CA

136138-01-077

136138-01-046

136138-01-035

136138-01-054

BLU

14-UL

136131-02-076

136131-02-171

136131-02-168

136131-02-189

14-CA

136134-02-076

136134-02-171

136134-02-168

136134-02-189

BRN

14-UL

136131-03-081

136131-03-100

136131-03-068

136131-03-311

14-CA

136134-03-081

136134-03-100

136134-03-068

136134-03-311

PUR

14-UL

136131-04-230

136131-04-083

136131-04-120

136131-04-120

14-CA

136134-04-230

136134-04-083

136134-04-120

136134-04-120

ORG

14-UL

136131-16-165

136131-16-195

136131-16-178

136131-16-208

14-CA

136134-16-165

136134-16-195

136134-16-178

136134-16-208

BLK

14-UL

136131-06-055

136131-06-062

136131-06-102

136131-06-101

14-CA

136134-06-055

136134-06-062

136134-06-102

136134-06-101

SIL

14-UL

136131-11-072

136131-11-102

136131-11-101

14-CA

136134-11-072

136134-11-102

136134-11-101

GRY

14-UL

136131-15-068

136131-15-085

14-CA

136134-15-068

136134-15-085

GROUND MAIN

136145-01-072

136145-01-040

136145-01-027

136145-01-068

GROUND SUB MAIN

136145-01-072

136145-01-030

136145-01-027

GROUND ATS

136145-01-022

136145-01-014

136145-01-006

136145-01-026

GROUND INVERTER

136145-01-018

136145-01-047

136145-01-006

136145-01-006

CABLE ASM GEN

UL

136148-02-085

136148-02-095

136148-02-075

174031-02-085





































CA







136148-02-085

136148-02-095

136148-02-075

<

8		7		6		5		↓	
		R40WD		R40CD		R40BD		R42AD	
D	SLIDEOUT #1 WIRE #1		136151-06-022 	136151-03-022 	136151-06-025 	136151-03-023 			
	SLIDEOUT #1 WIRE #2		136151-02-022 	136151-13-032 	136151-13-025 	136151-13-023 			
	SLIDEOUT #1 WIRE #3		----	136151-04-032 	136151-03-029 	----			
	SLIDEOUT #1 WIRE #4				136151-15-029 	----			
	SLIDEOUT #1 WIRE #5		----	----	136151-11-025  214	----			
	SLIDEOUT #2 WIRE #1		136151-04-022 	136151-04-022 	136151-04-022 	136151-04-022 			
	SLIDEOUT #3 WIRE #1		136151-02-022 	136151-06-021 	136151-02-025 	136151-04-045 			
	SLIDEOUT #3 WIRE #2		136151-13-022 	136151-02-021 	----	----			
C	SLIDEOUT #3 WIRE #3		----	136151-11-021  214	----	----			
	SLIDEOUT #4 WIRE #1		----	----	----	136151-06-030 			
	SLIDEOUT #4 WIRE #2		----	----	----	136151-02-030 			
	SLIDEOUT #4 WIRE #3		----	----	----	136151-04-030 			
	SLIDEOUT #4 WIRE #4		----	----	----	136151-11-030  214			
	THROW IN WIRE #1	14-UL	136131-03-022		136131-15-006  14C	136131-03-018 			
		14-CA	136134-03-022		136134-15-006  14C	136134-03-018 			
	THROW IN WIRE #2	14-UL	136131-04-042 	136131-03-091	136131-13-012 	136131-06-012 			
14-CA		136134-04-042 	136134-03-091	136134-13-012 	136134-06-012 				
B	THROW IN WIRE #3	14-UL	136131-13-015	136131-13-032 	136131-03-042 	136131-02-053 			
		14-CA	136134-13-015	136134-13-032 	136134-03-042 	136134-02-053 			
	THROW IN WIRE #4	14-UL	136131-02-114 	136131-02-025 	136131-04-004 	136131-04-003 			
		14-CA	136134-02-114 	136134-02-025 	136134-04-004 	136134-04-003 			
	THROW IN WIRE #5	14-UL	136131-02-017	136131-02-040 	136131-04-066 	136131-04-015 			
		14-CA	136134-02-017	136134-02-040 	136134-04-066 	136134-04-015 			
	THROW IN WIRE #6	14-UL	136131-02-040 11E	136131-04-046 	136131-02-070 	136131-04-102 			
		14-CA	136134-02-040 11E	136134-04-046 	136134-02-070 	136134-04-102 			
A	THROW IN WIRE #7	14-UL	----	136131-04-055 	136131-02-027  422 423 425 136131-02-080  41E 44W	136131-11-012  214			
		14-CA	----	136134-04-055 	136134-02-027  422 423 425 136134-02-080  41E 44W	136134-11-012  214			
	THROW IN WIRE #8	14-UL	----	136131-04-033 	136131-11-006  214	----			
		14-CA	----	136134-04-033 	136134-11-006  214	----			
	THROW IN WIRE #9	14-UL	----	136131-11-020  214	----	----			
		14-CA	----	136134-11-020  214	----	----			
	THROW IN WIRE #10	14-UL	----	136131-03-003  14F	----	----			
		14-CA	----	136134-03-003  14F	----	----			

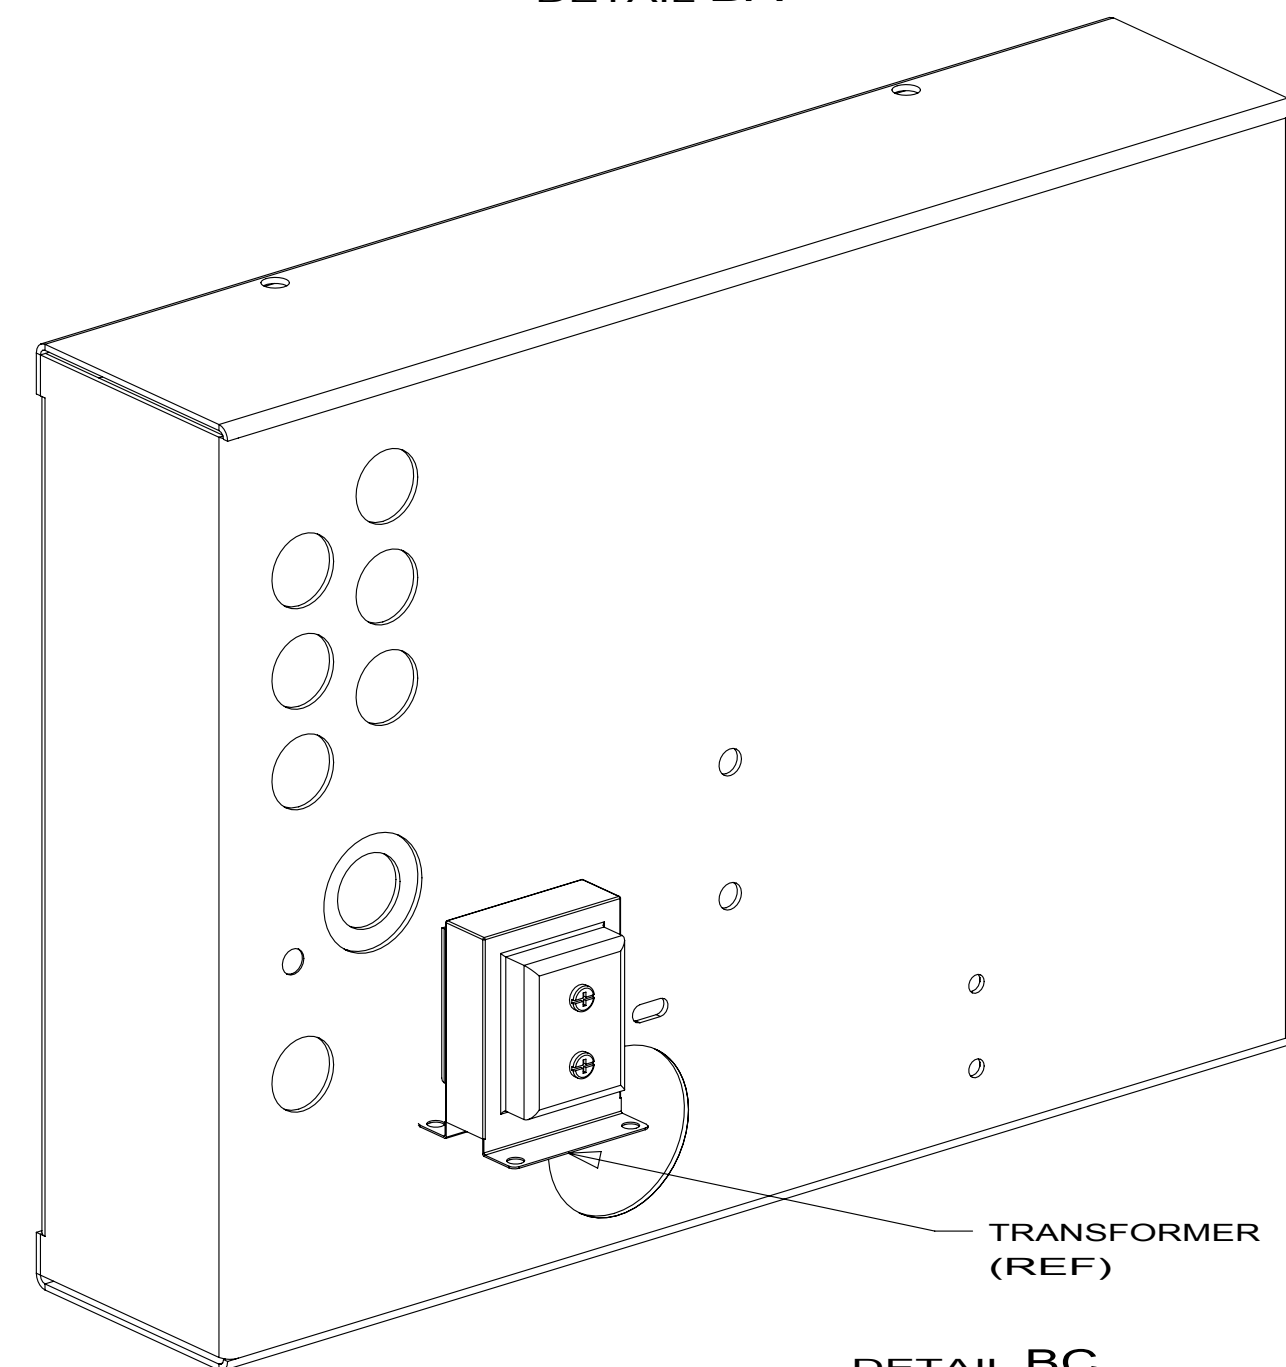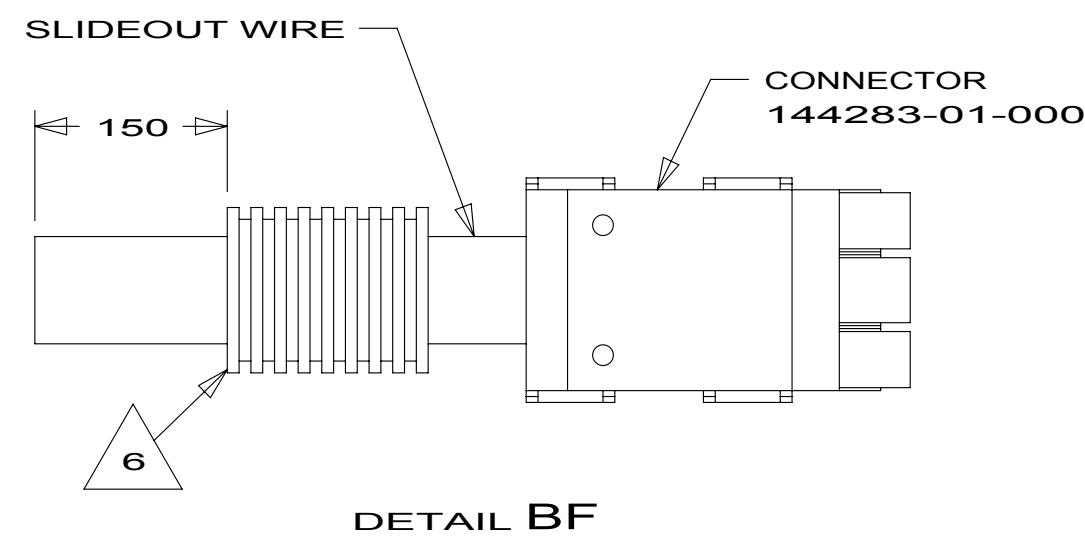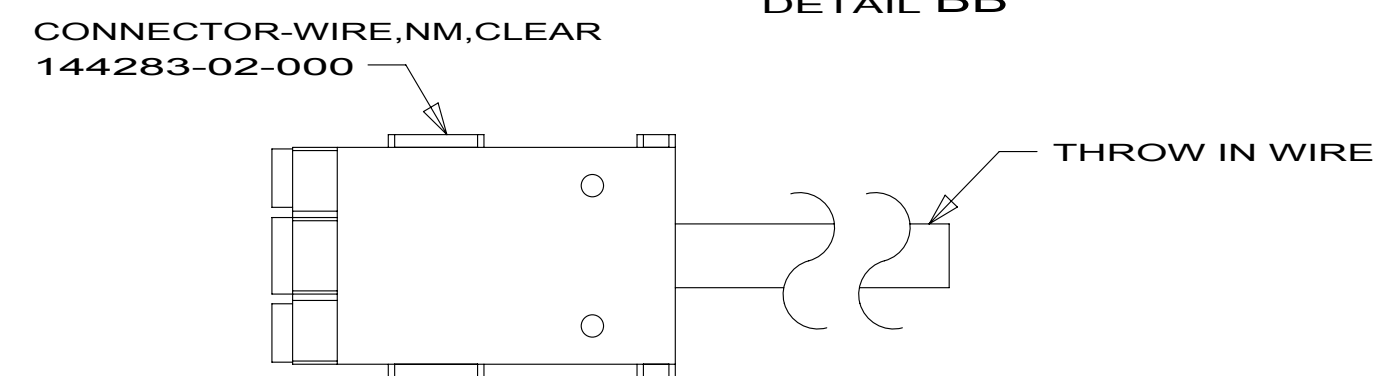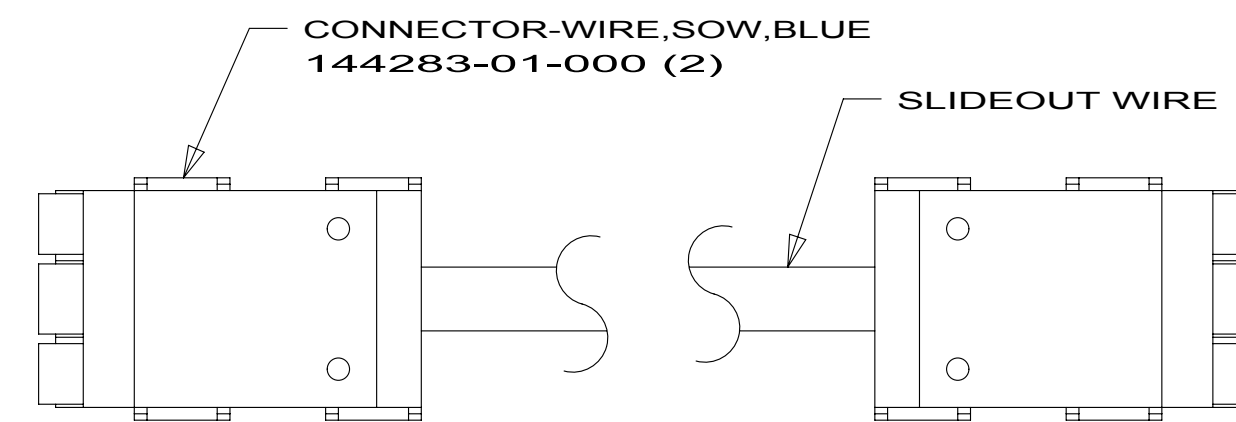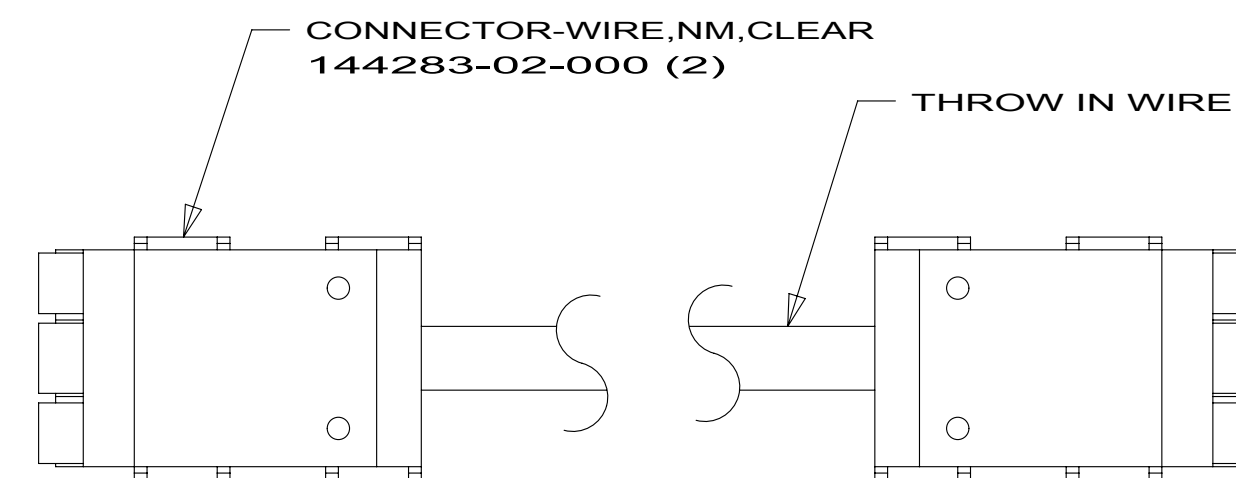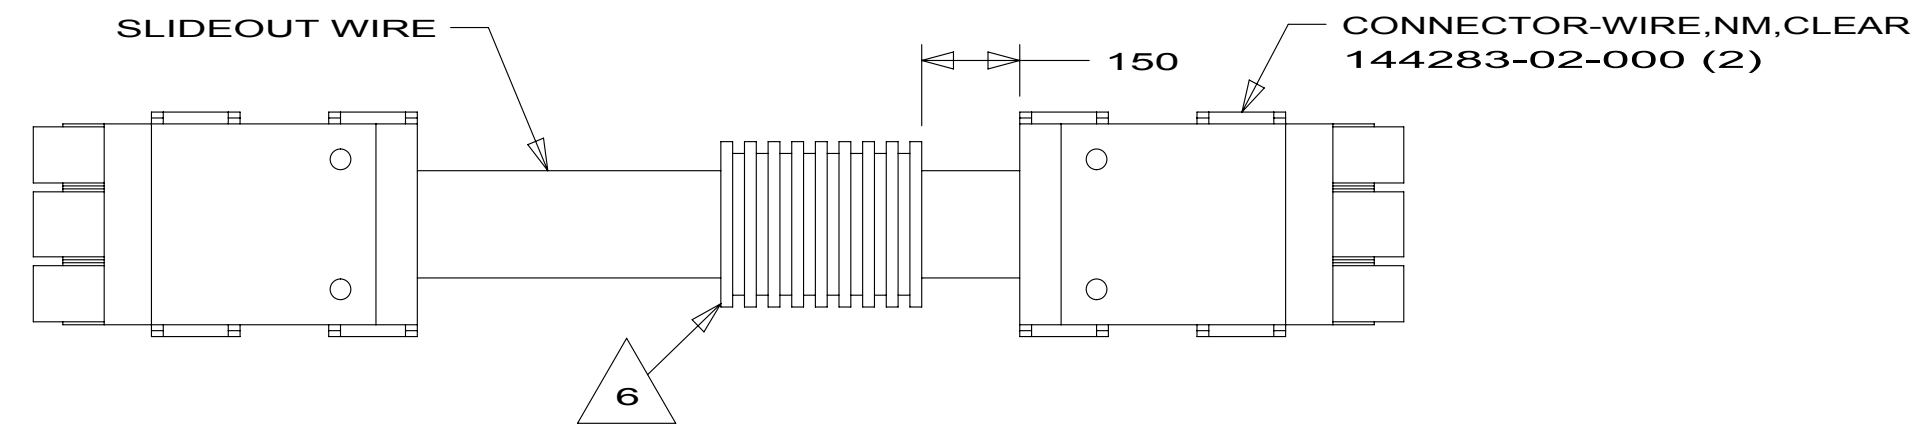

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- | | |
|---|--|
|  | <p>FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000</p> |
|---|--|

- | | |
|-----|------------------------------|
| 14F | LOUNGE CHAIRS (2)-WITH TABLE |
| 44W | THEATER SEATING&LOUNGE CHAIR |
| 425 | RESTEASY-SECTIONAL-ULTRALEAT |
| 423 | RESTEASY-SECTION-UL LTR DUAL |
| 422 | RESTEASY-SECTIONAL-FABRIC |
| 41E | REST EASY W/LOUNGE CHAIR |
| 14C | FIREPLACE-ELECTRIC |
| 11E | REFRIGERATOR/FREEZER PORTABL |
| 214 | DISHWASHER DRAWER STYLE |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS-USA |

FIRST USED

10 R-SERIES

DO NOT SCALE DRAWING

TITLE: **LOAD CENTER/ATS ASM**

SHEET 2	PART NO 169879	REV
---------	--------------------------	-----


4	SEE DETAIL BD FOR CONNECTOR INSTALLATION.
3	SEE WIRING INSTL-BODY, 110V FOR ADDITIONAL INFORMATION.
2	SEE DETAIL BB FOR CONNECTOR INSTALLATION.
1	SEE DETAIL BA FOR CONNECTOR INSTALLATION.

NOTES:

 SEE DETAIL **BF** FOR CONNECTOR INSTALLATION.

 APPLY 300MM OF CONDUIT-CONVOLUTE 41953-05-000 OVER WIRE AT DIMENSION SHOWN AND SECURE BOTH ENDS OF TUBING TO WIRE WITH TAPE 8363-01-000.

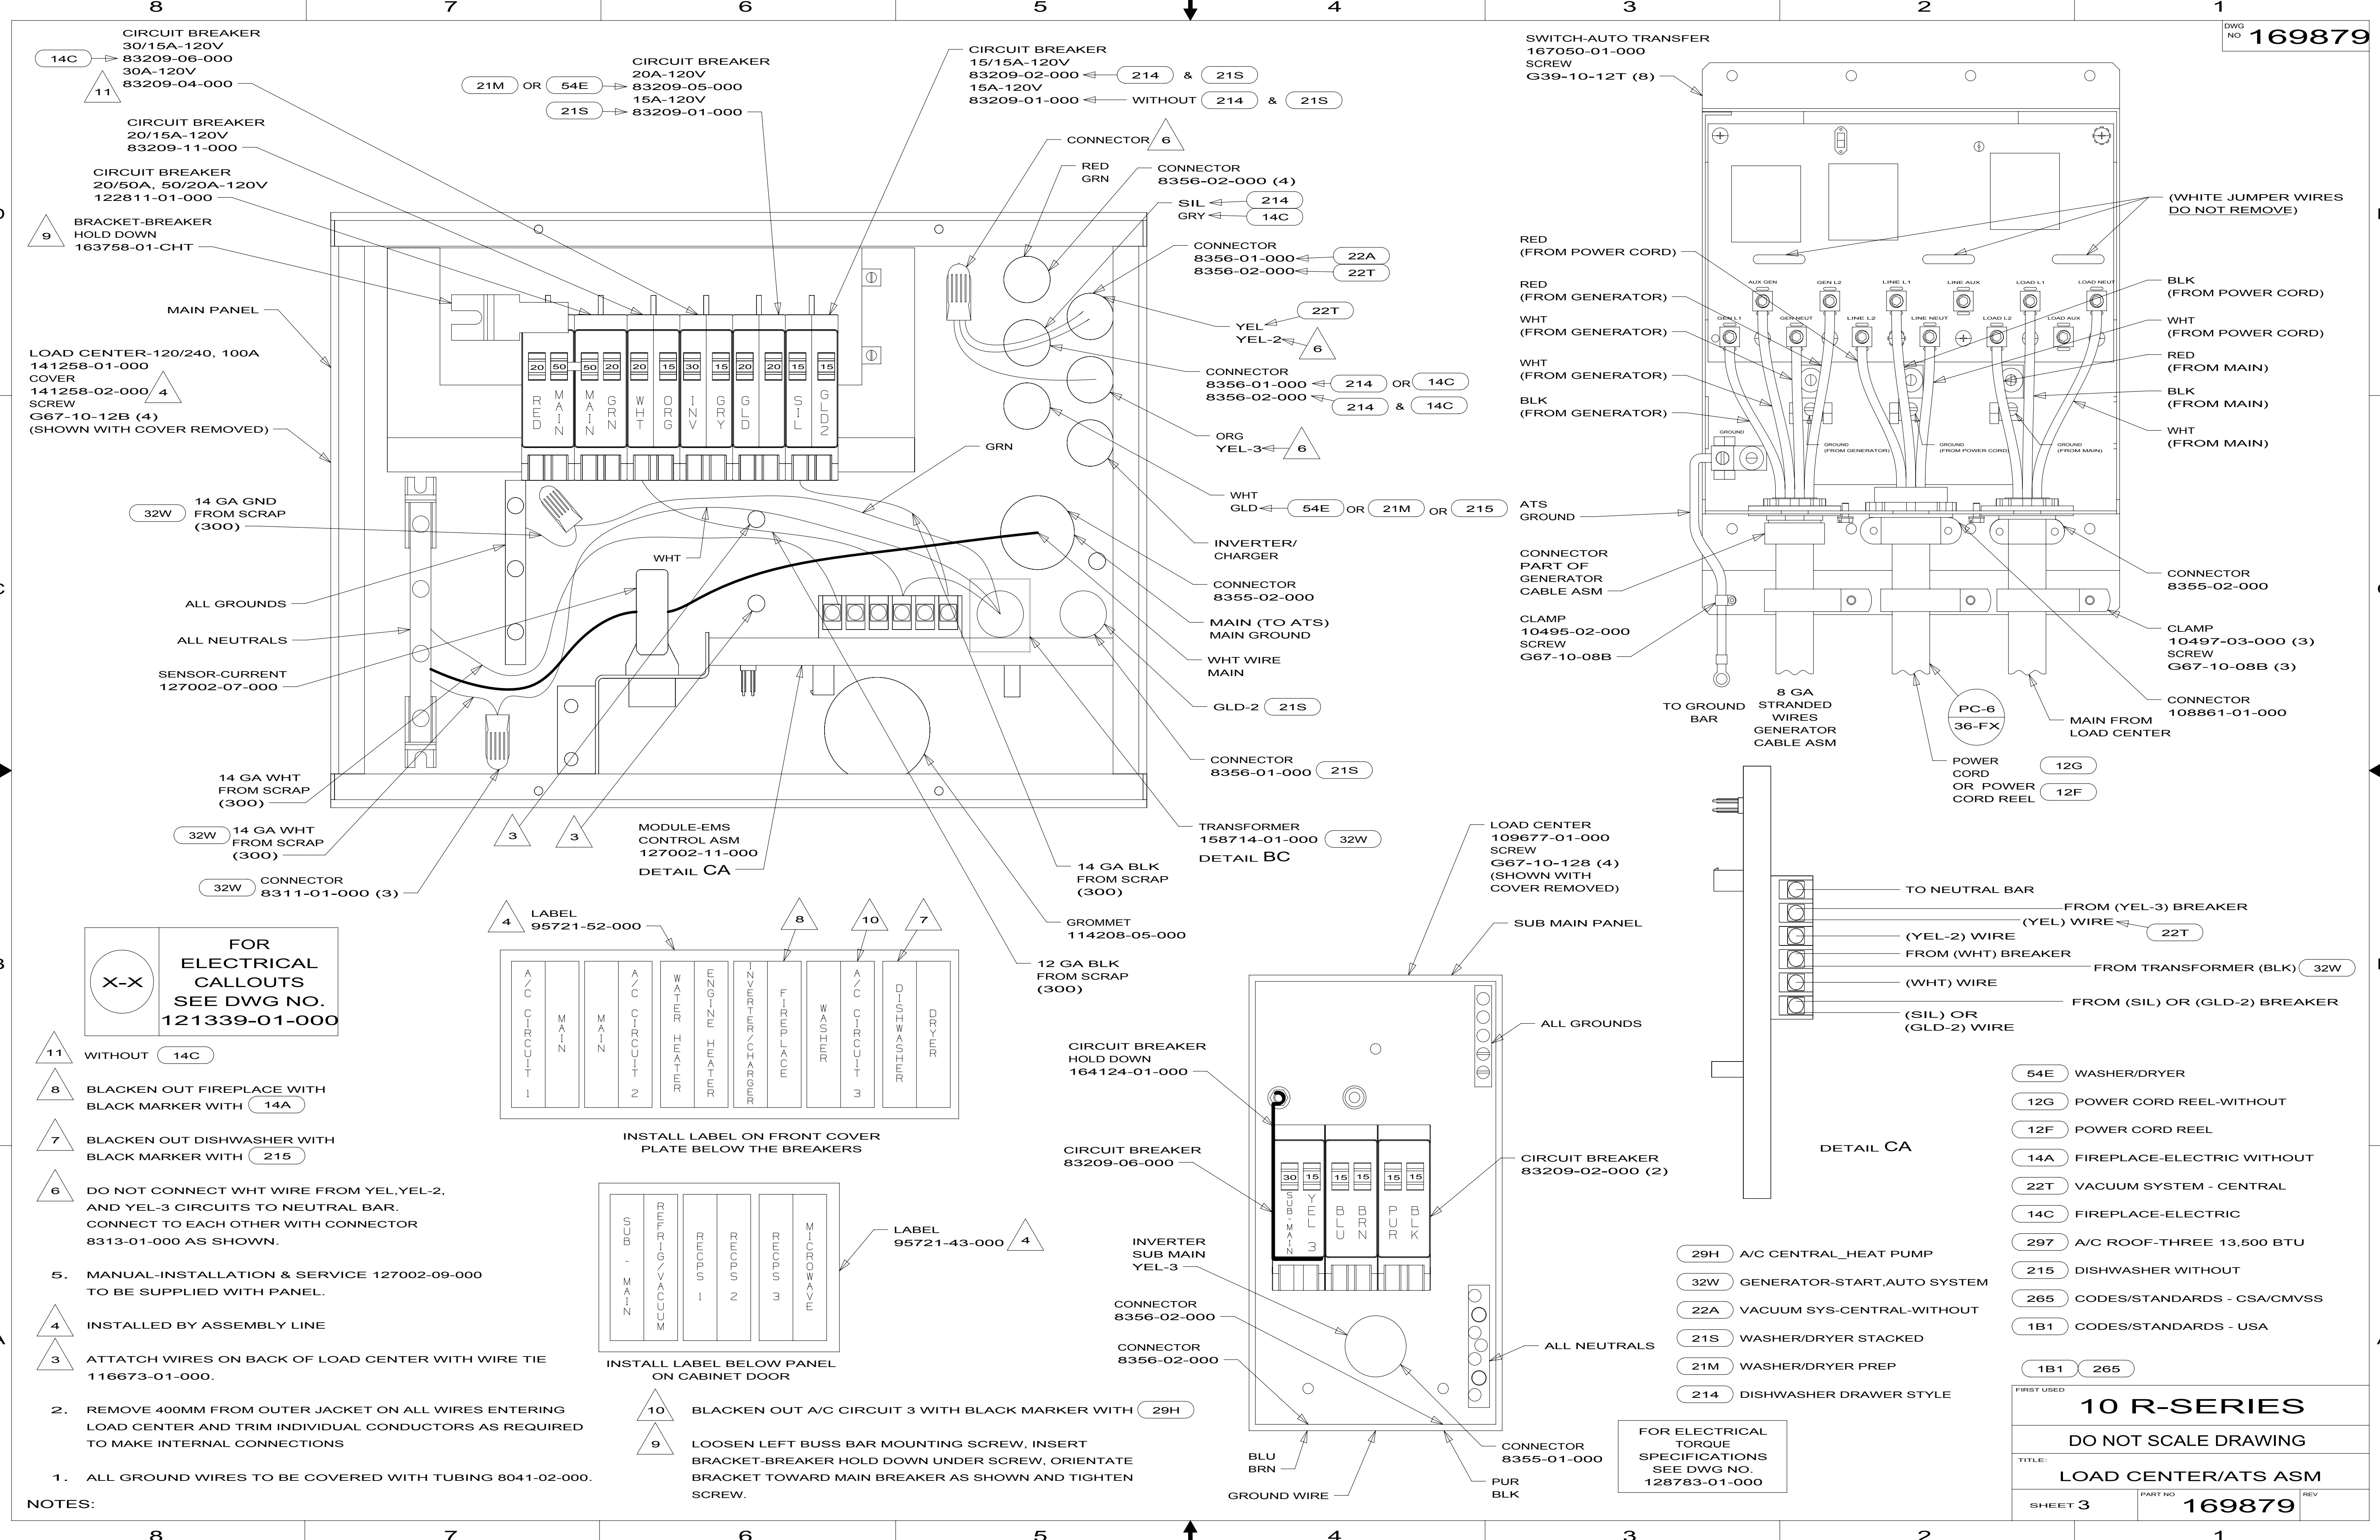 SEE DETAIL **BE** FOR CONNECTOR INSTALLATION.



NOTES:

1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

2. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS

3. ATTATCH WIRES ON BACK OF LOAD CENTER WITH WIRE TIE 116673-01-000.

4. INSTALLED BY ASSEMBLY LINE

5. MANUAL-INSTALLATION & SERVICE 127002-09-000 TO BE SUPPLIED WITH PANEL.

6. DO NOT CONNECT WHT WIRE FROM YEL, YEL-2, AND YEL-3 CIRCUITS TO NEUTRAL BAR. CONNECT TO EACH OTHER WITH CONNECTOR 8313-01-000 AS SHOWN.

7. BLACKEN OUT DISHWASHER WITH BLACK MARKER WITH 215


8. BLACKEN OUT FIREPLACE WITH BLACK MARKER WITH 14A

11. WITHOUT 14C

54E	WASHER/DRYER
12G	POWER CORD REEL-WITHOUT
12F	POWER CORD REEL
14A	FIREPLACE-ELECTRIC WITHOUT
22T	VACUUM SYSTEM - CENTRAL
14C	FIREPLACE-ELECTRIC
297	A/C ROOF-THREE 13,500 BTU
215	DISHWASHER WITHOUT
265	CODES/STANDARDS - CSA/CMVSS
1B1	CODES/STANDARDS - USA
1B1	265

FIRST USED	
10 R-SERIES	
DO NOT SCALE DRAWING	
TITLE: LOAD CENTER/ATS ASM	
SHEET 3	PART NO 169879 REV

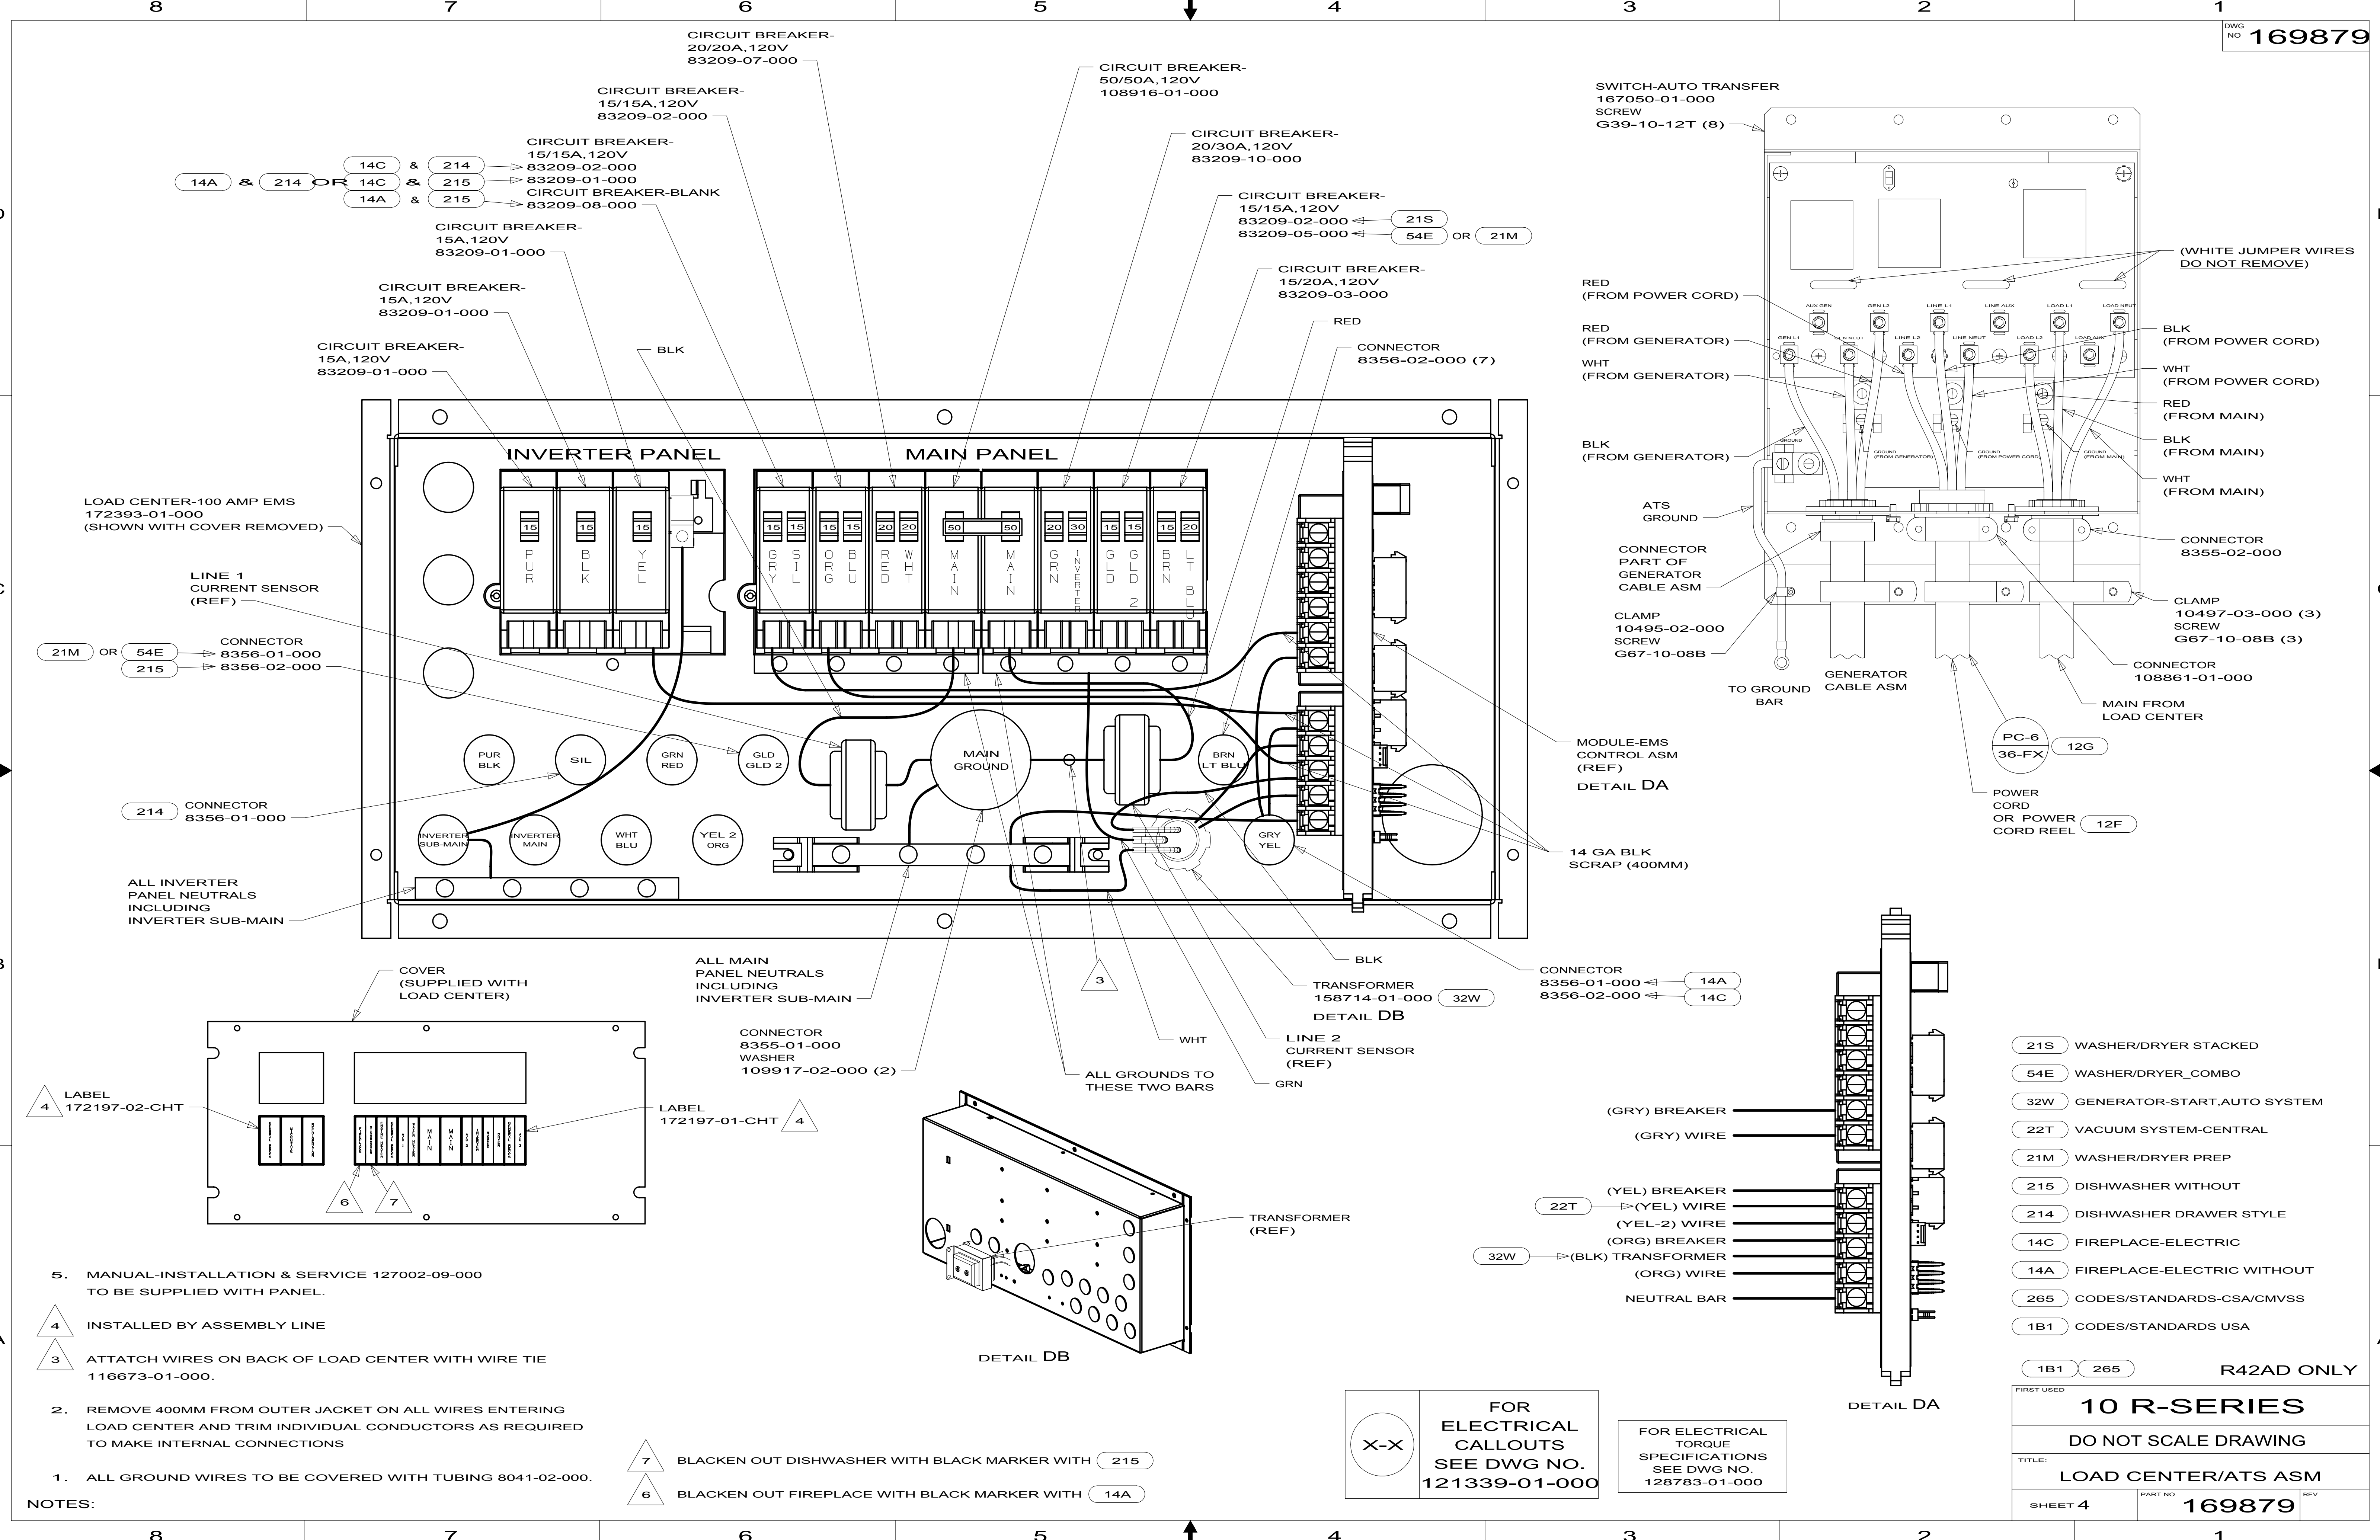FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000



- NOTES:
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 2. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS
 3. ATTATCH WIRES ON BACK OF LOAD CENTER WITH WIRE TIE 116673-01-000.
 4. INSTALLED BY ASSEMBLY LINE
 5. MANUAL-INSTALLATION & SERVICE 127002-09-000 TO BE SUPPLIED WITH PANEL.

- 7 BLACKEN OUT DISHWASHER WITH BLACK MARKER WITH 215
- 6 BLACKEN OUT FIREPLACE WITH BLACK MARKER WITH 14A

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000





- 21S WASHER/DRYER STACKED
- 54E WASHER/DRYER_COMBO
- 32W GENERATOR-START,AUTO SYSTEM
- 22T VACUUM SYSTEM-CENTRAL
- 21M WASHER/DRYER PREP
- 215 DISHWASHER WITHOUT
- 214 DISHWASHER DRAWER STYLE
- 14C FIREPLACE-ELECTRIC
- 14A FIREPLACE-ELECTRIC WITHOUT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

R42AD ONLY		
FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
LOAD CENTER/ATS ASM		
SHEET 4	PART NO.	REV
	169879	


KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	171727-01-700	EA	REMOTE	PR7ATSC


8	
DRAWING NO.	FEATURES
169197-01	WIN
169197-02	ITA

				1	
RELEASE		REV A	DATE	DWG NO	169197
REV	ZONE	REVISION RECORD			DATE DFT-ORIG

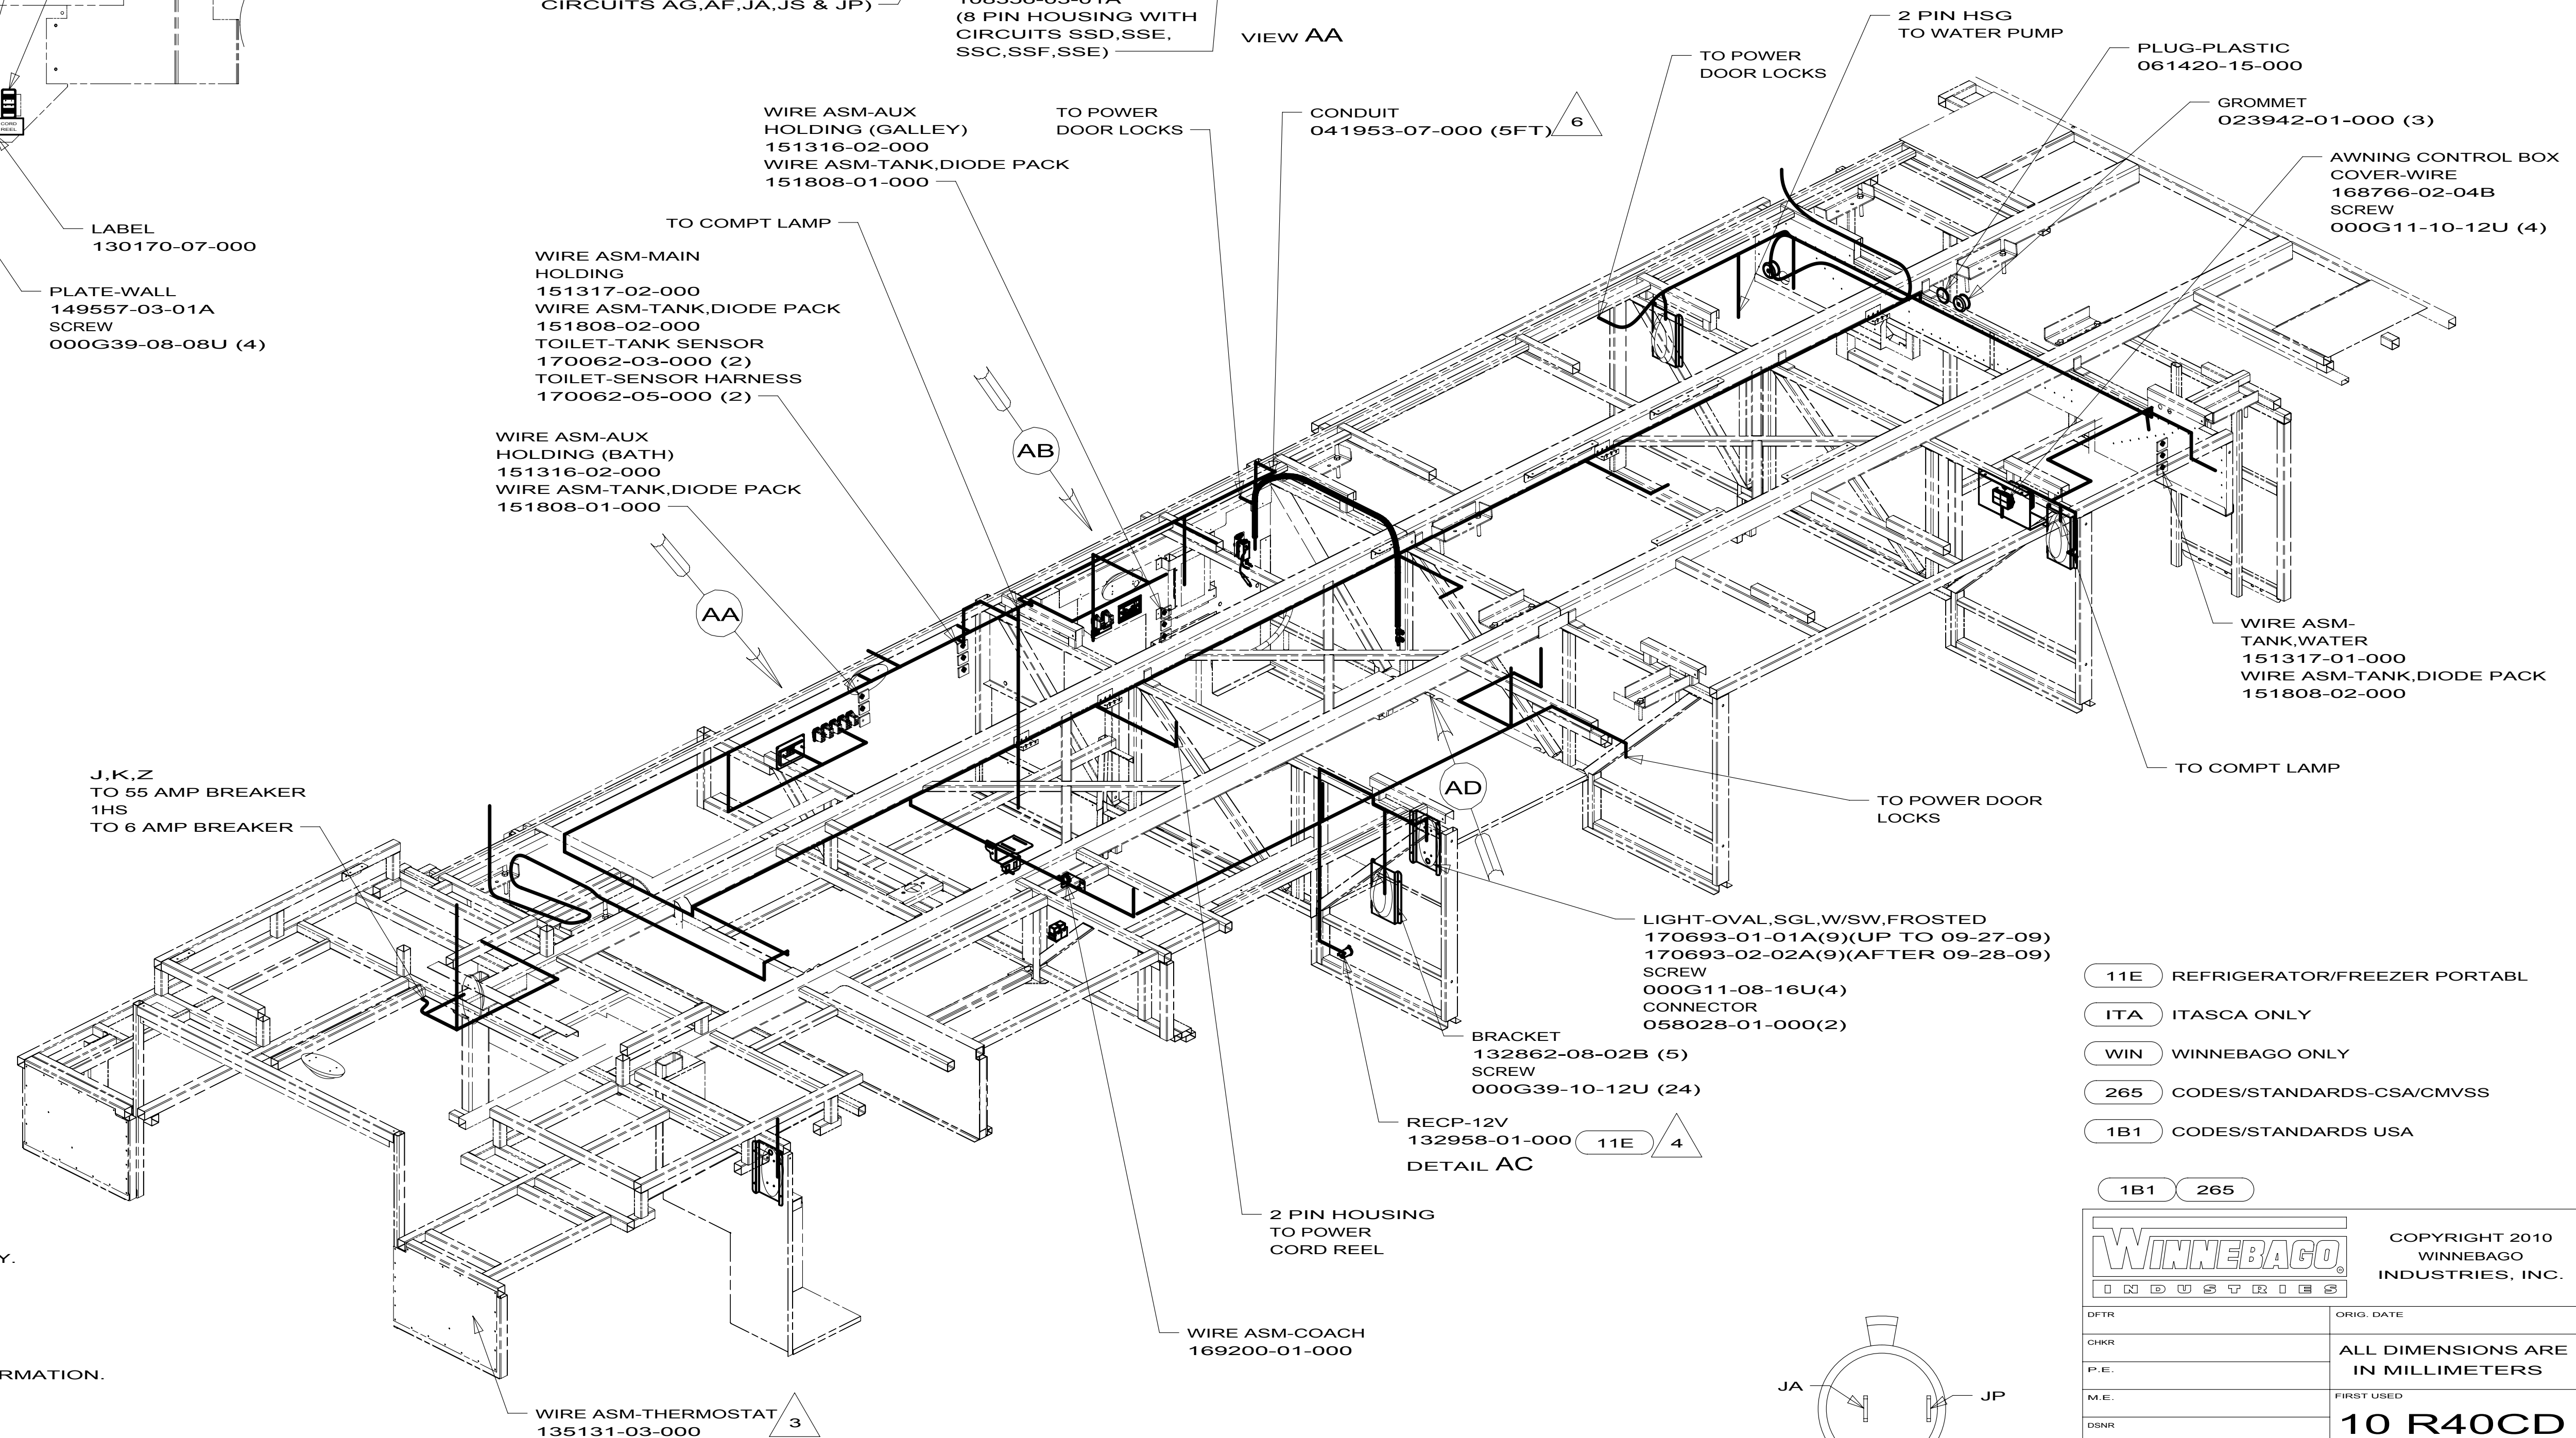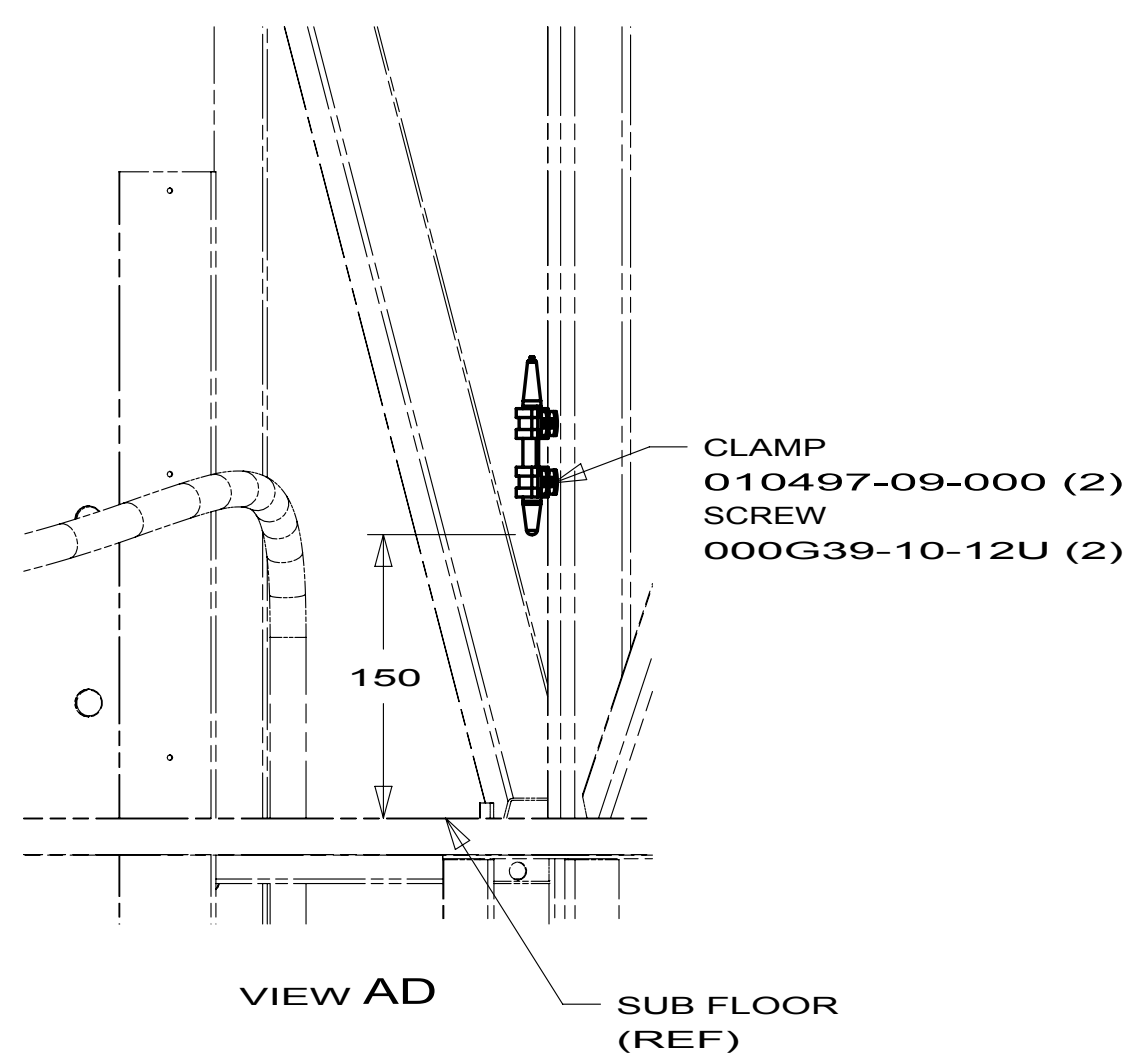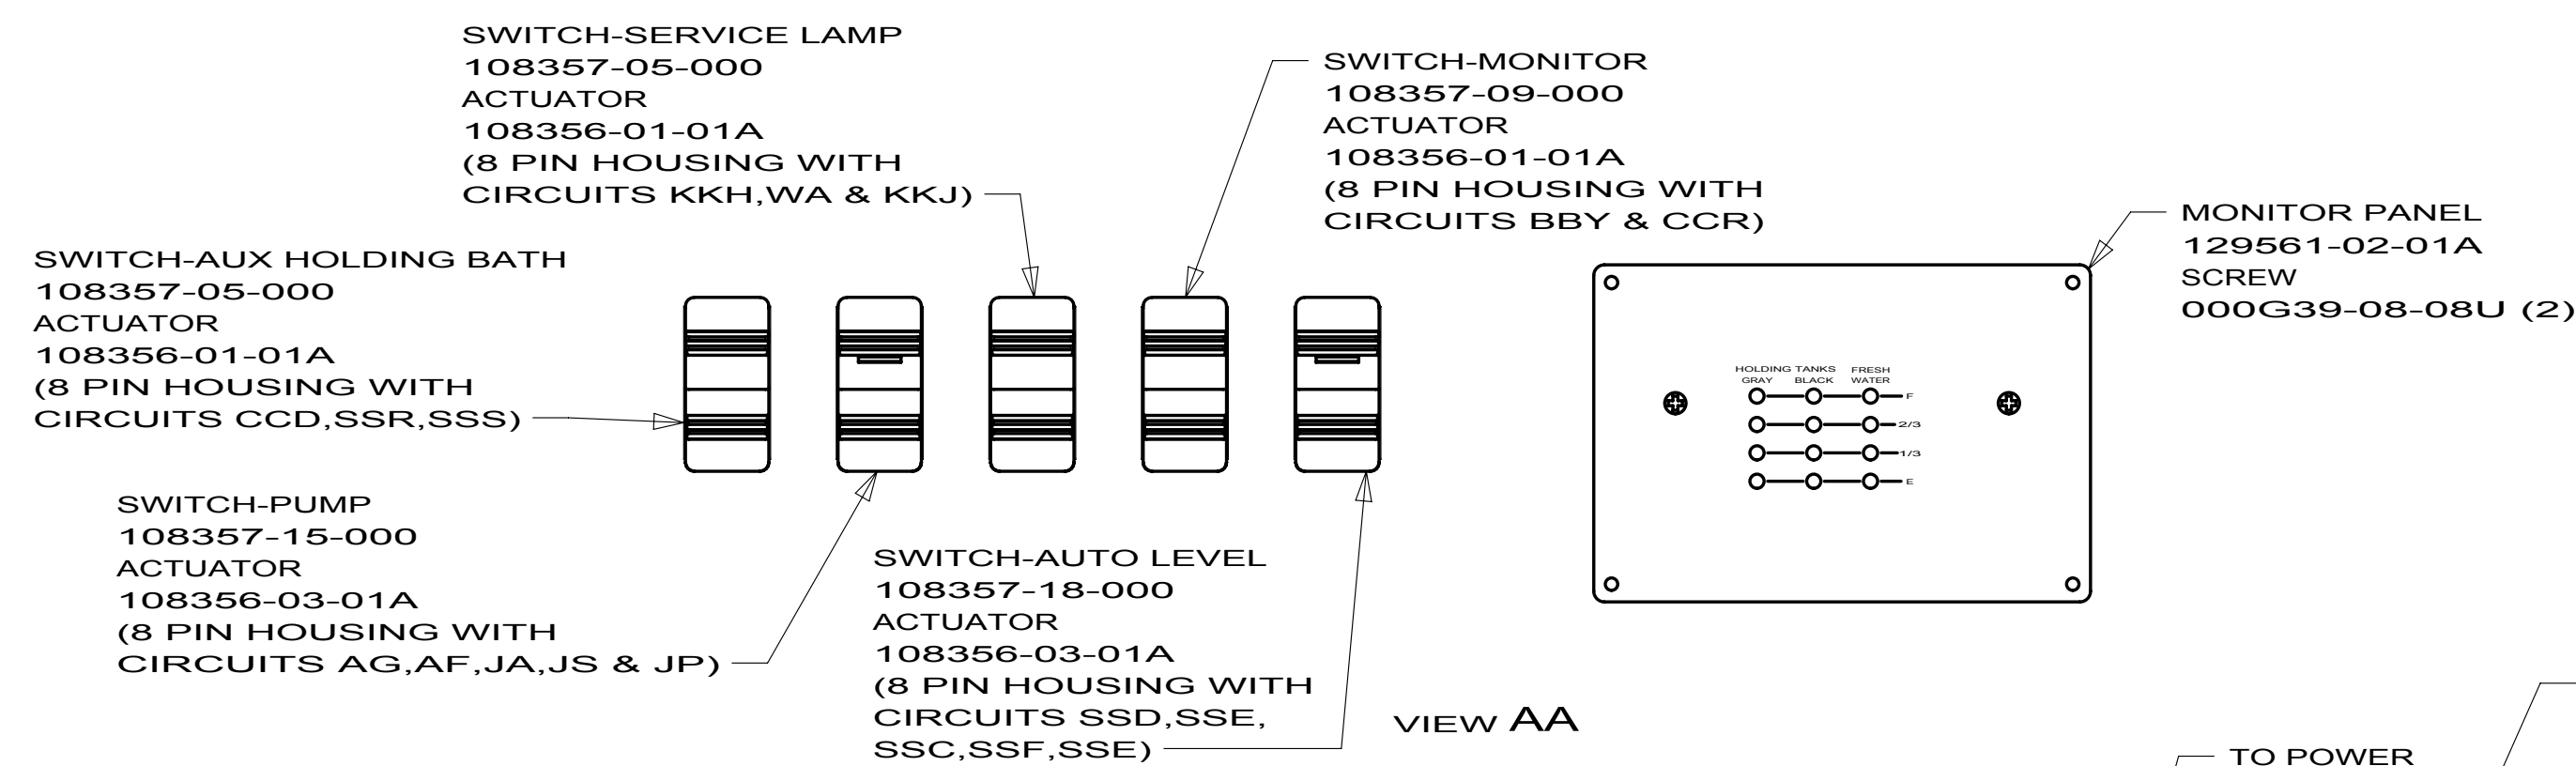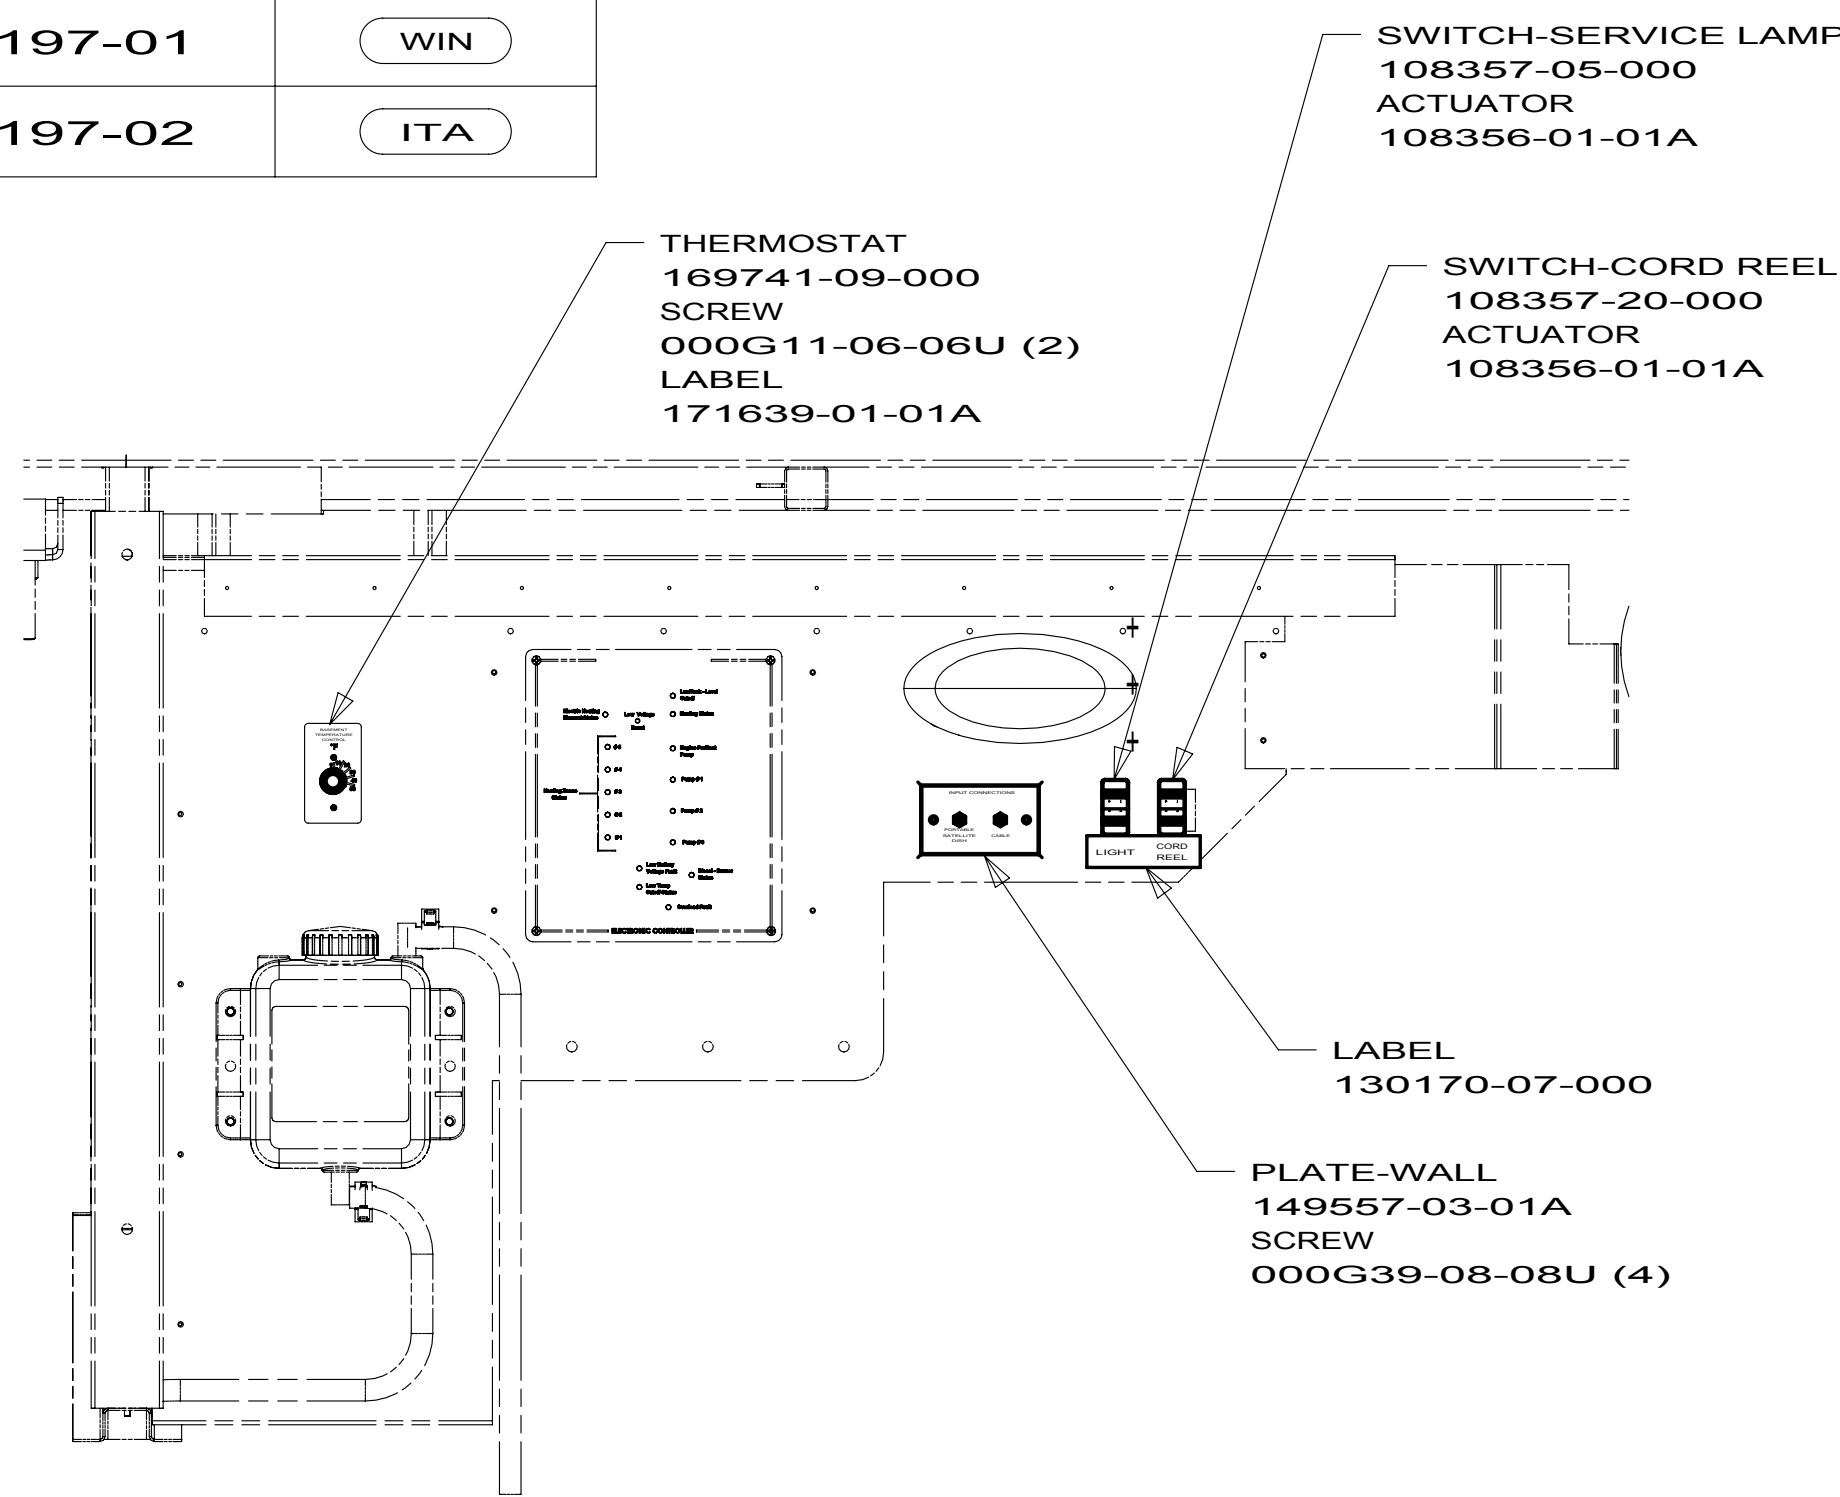

- | | |
|-----|-------------------------------|
| 11E | REFRIGERATOR/FREEZER PORTABLE |
| ITA | ITASCA ONLY |
| WIN | WINNEBAGO ONLY |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |

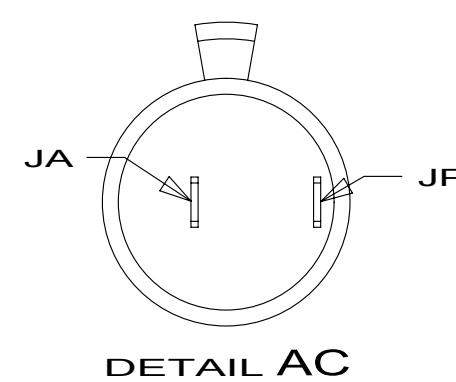

		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFT# _____ CHKR _____ P.E. _____ M.E. _____ DSN# _____		ORIG. DATE _____ ALL DIMENSIONS ARE IN MILLIMETERS FIRST USED _____ 10 R40CD	
UNSPECIFIED TOLERANCES ARE: WHOLE DIM (X) ± 3 ONE-PLACE (X.X) ± 1.5 TWO-PLACE (X.XX) ± 0.50 ANGLE ± 1°		MATERIAL: _____ THIRD ANGLE PROJECTION 	
DO NOT SCALE DRAWING			
TITLE: _____ WIRING INSTL-BODY,12V			
SHEET 1 of 9		PART NO 169197	
		REV _____	

NOTES:

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

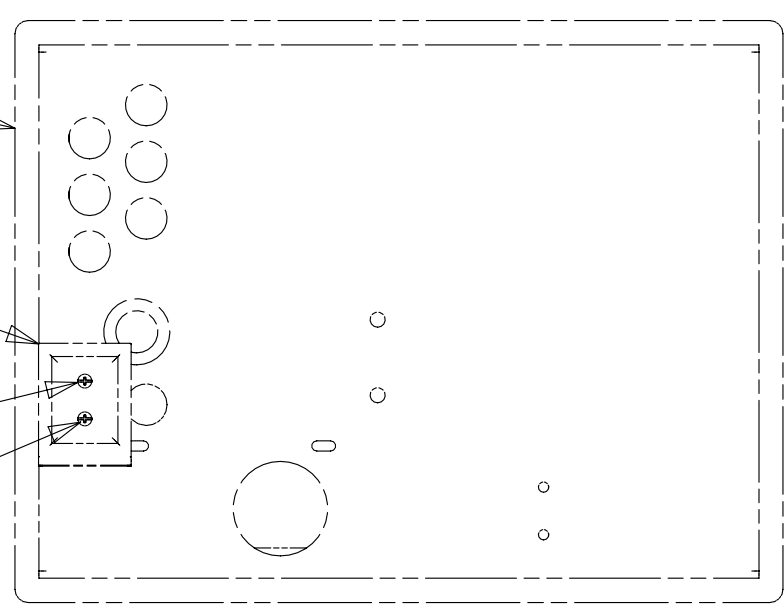
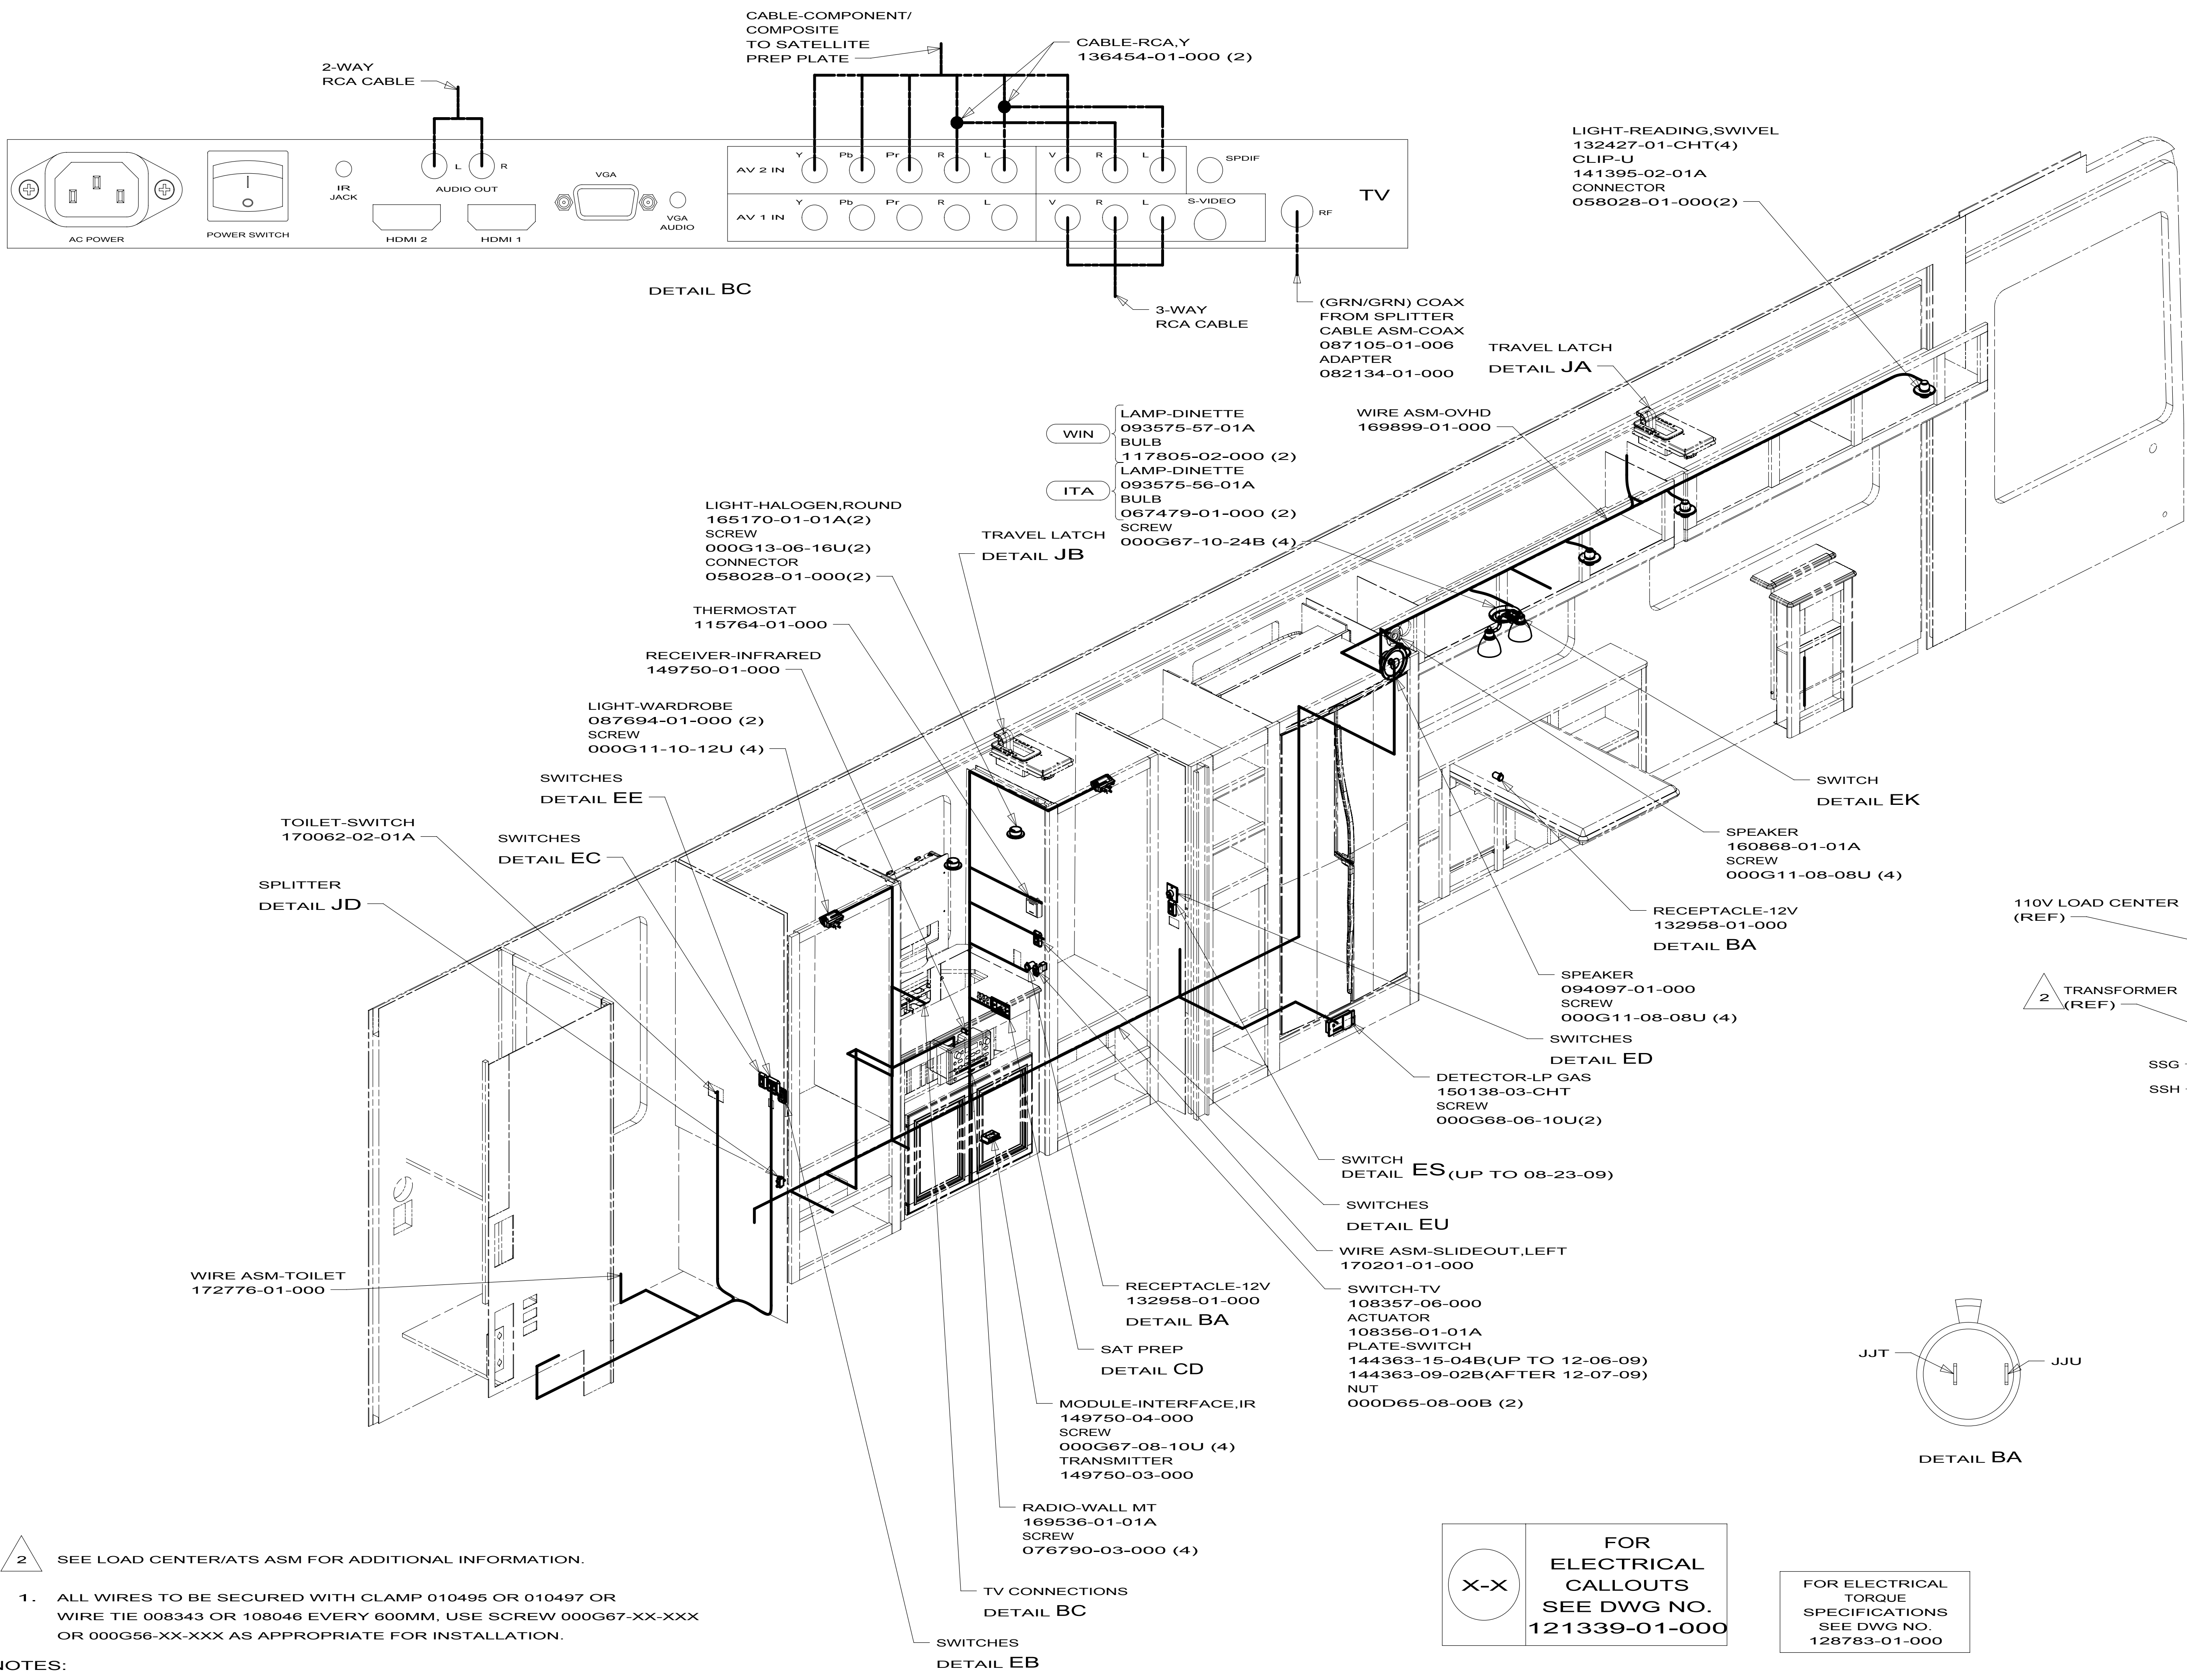
FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

DO NOT SCALE DRAWING


WIRING INSTL-BODY,12V

SHEET 1 OF 9 PART NO 169197

3/25/2010



VIEW BB

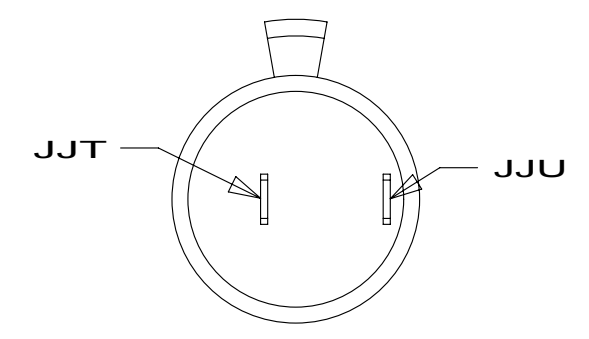

DETAIL BA

- ITA ITASCA ONLY
- WIN WINNEBAGO ONLY
- 25D STEREO SYSTEM/W/CD/DVD REAR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 R40CD		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 2	PART NO 169197	REV

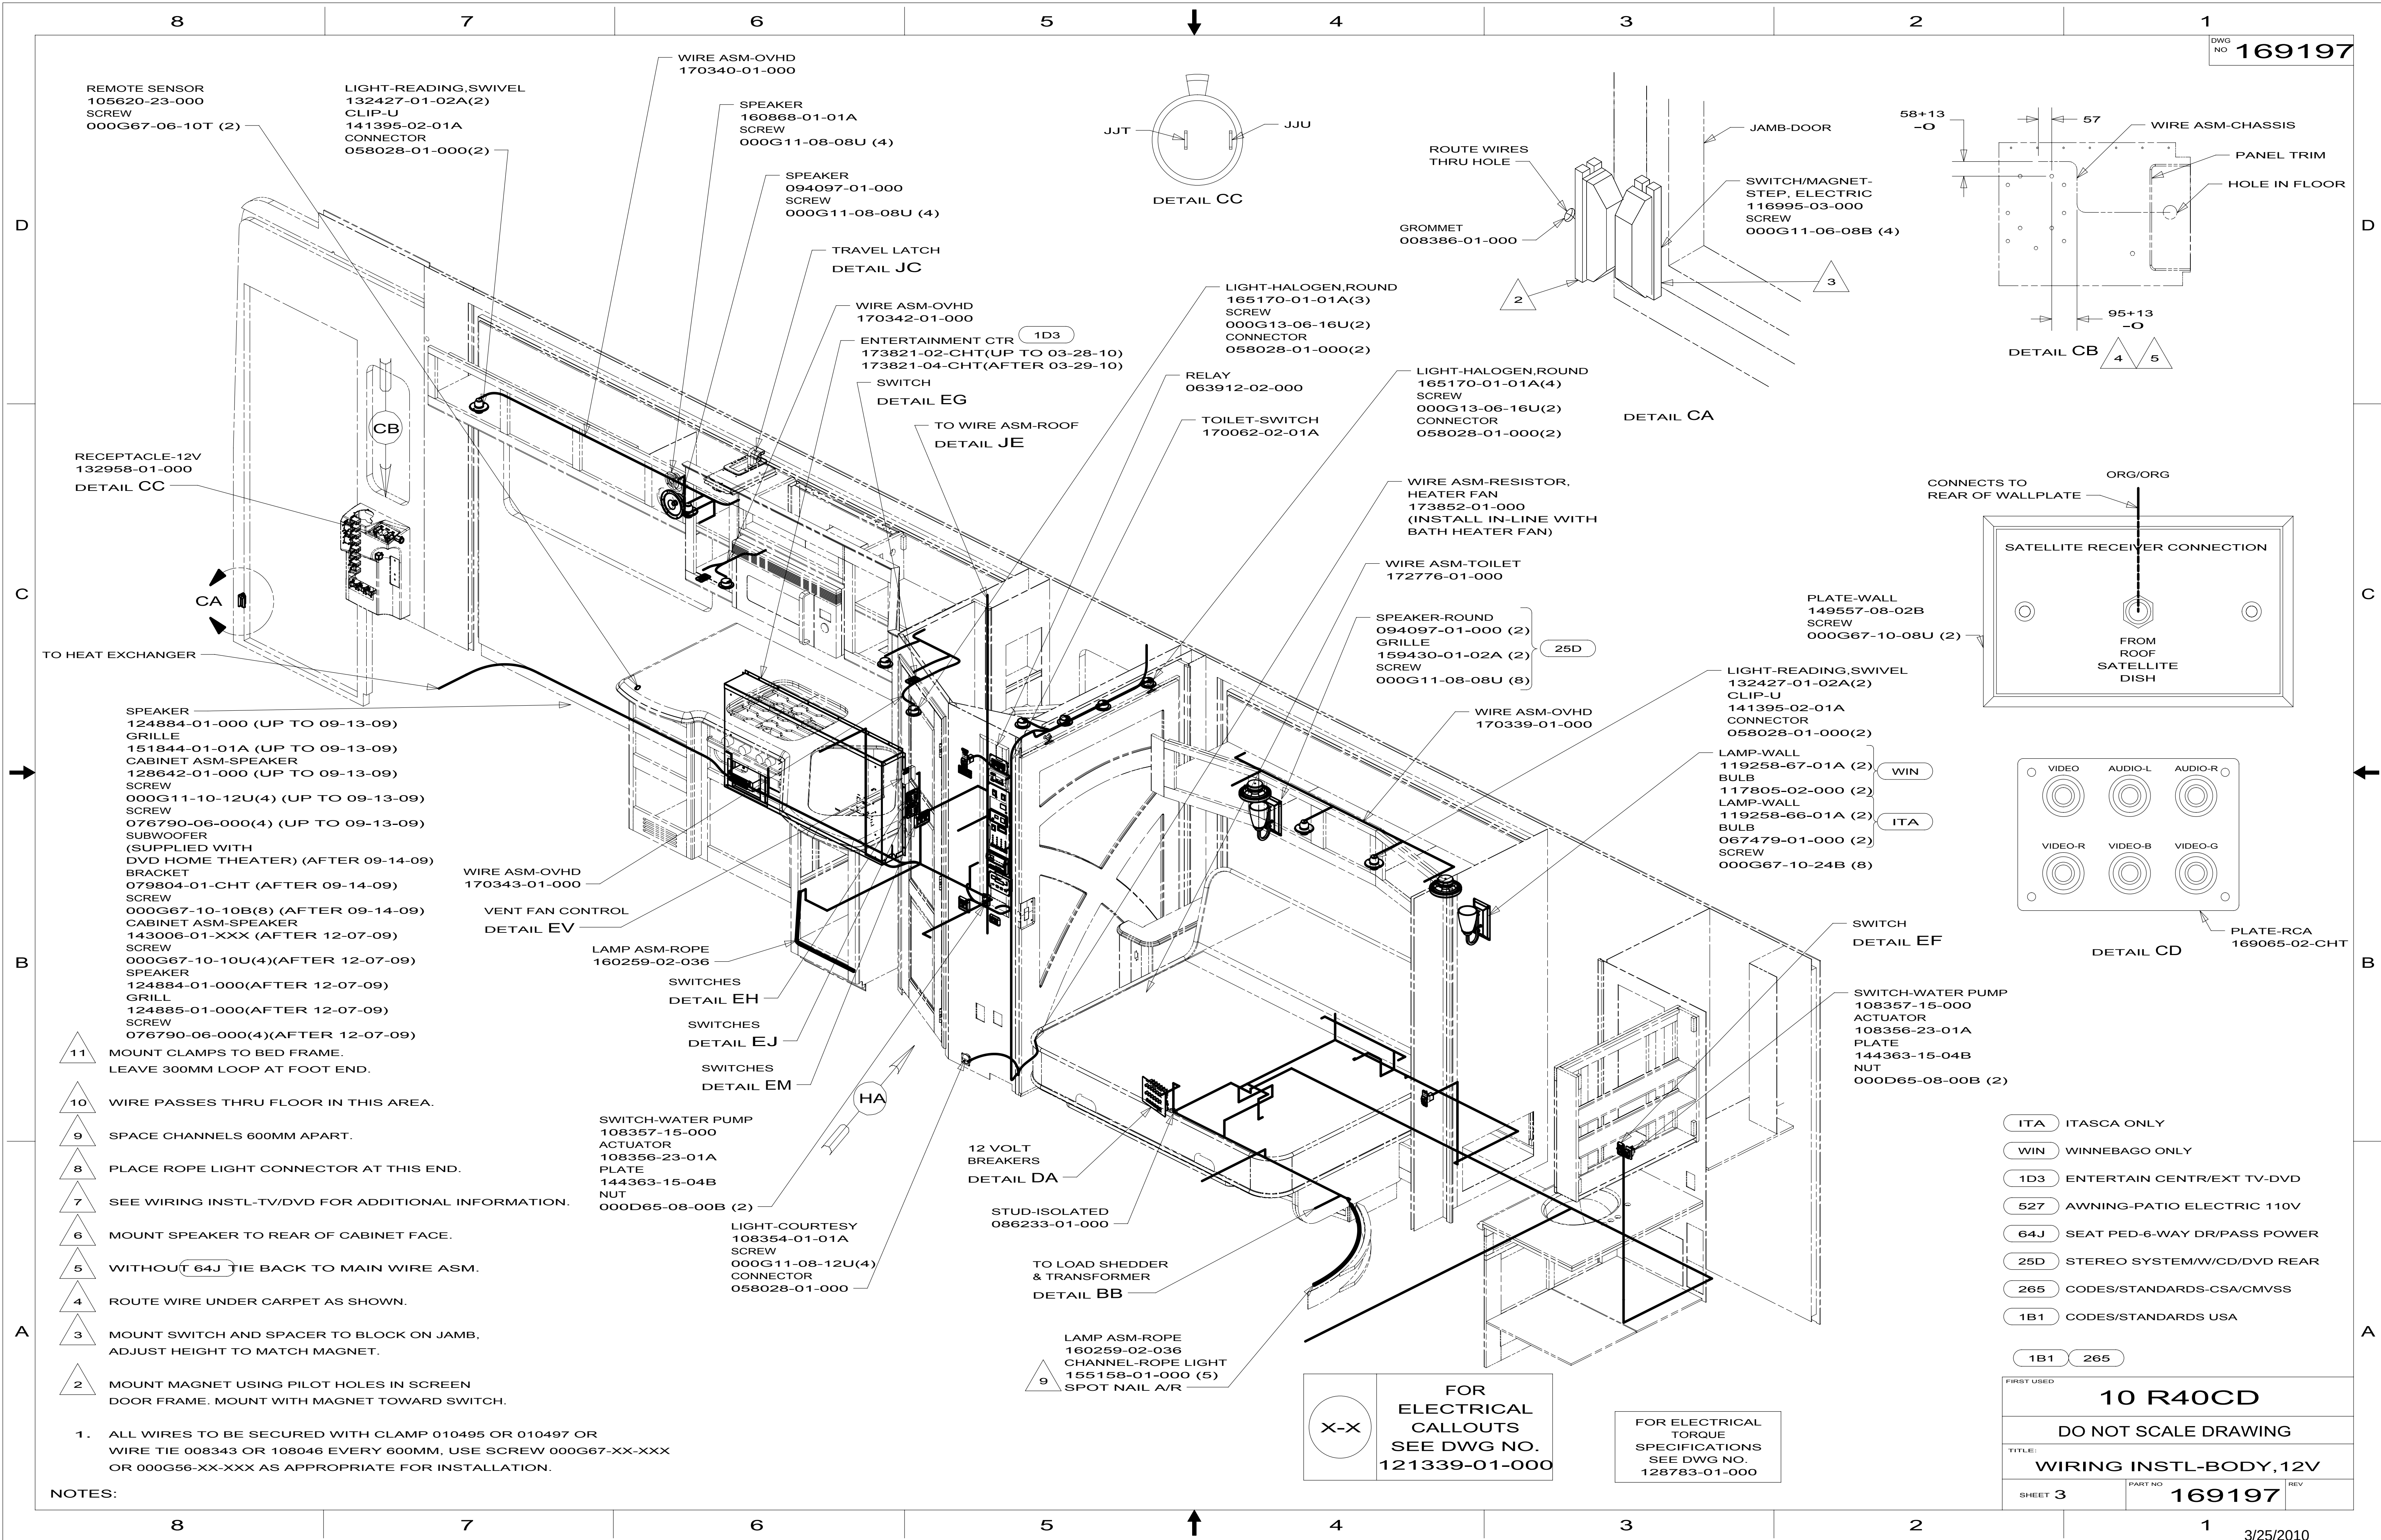
2 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

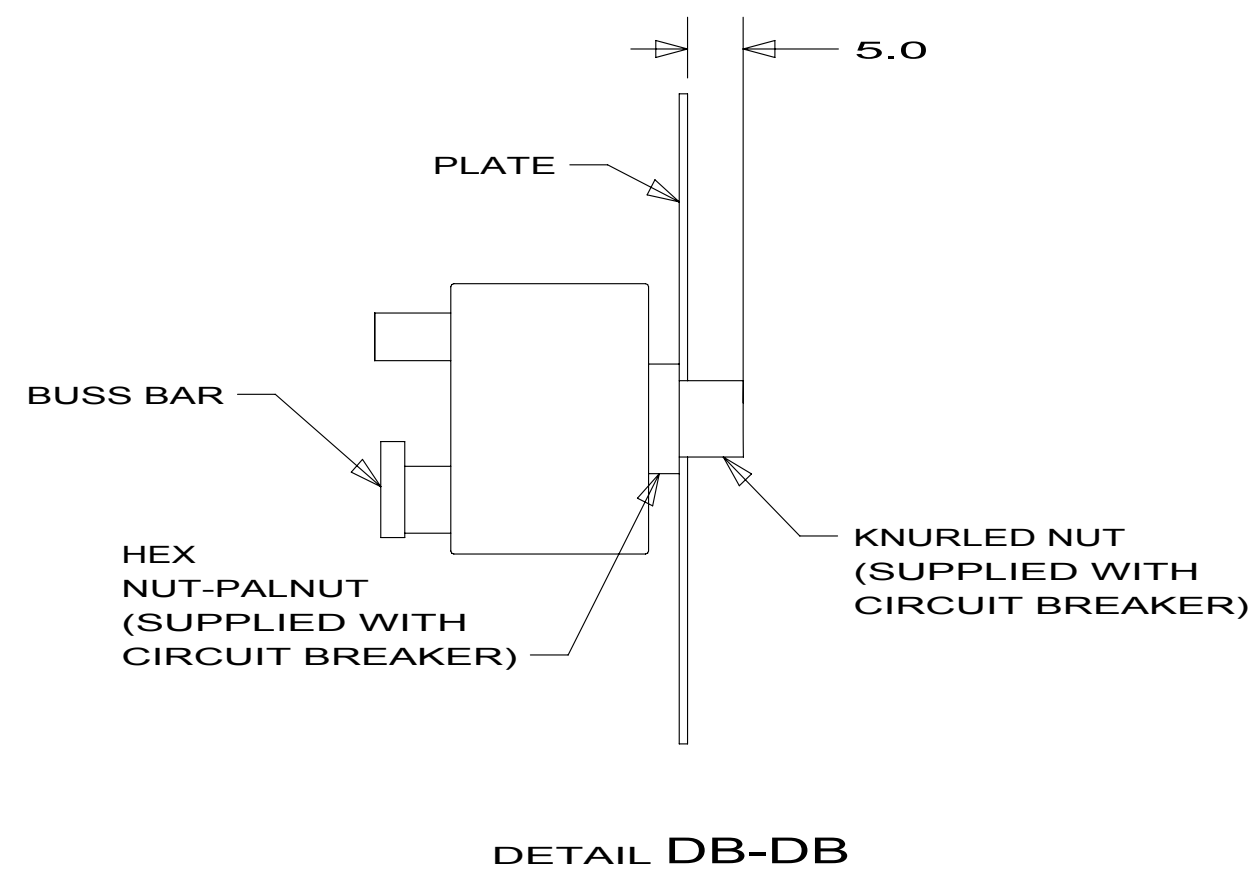
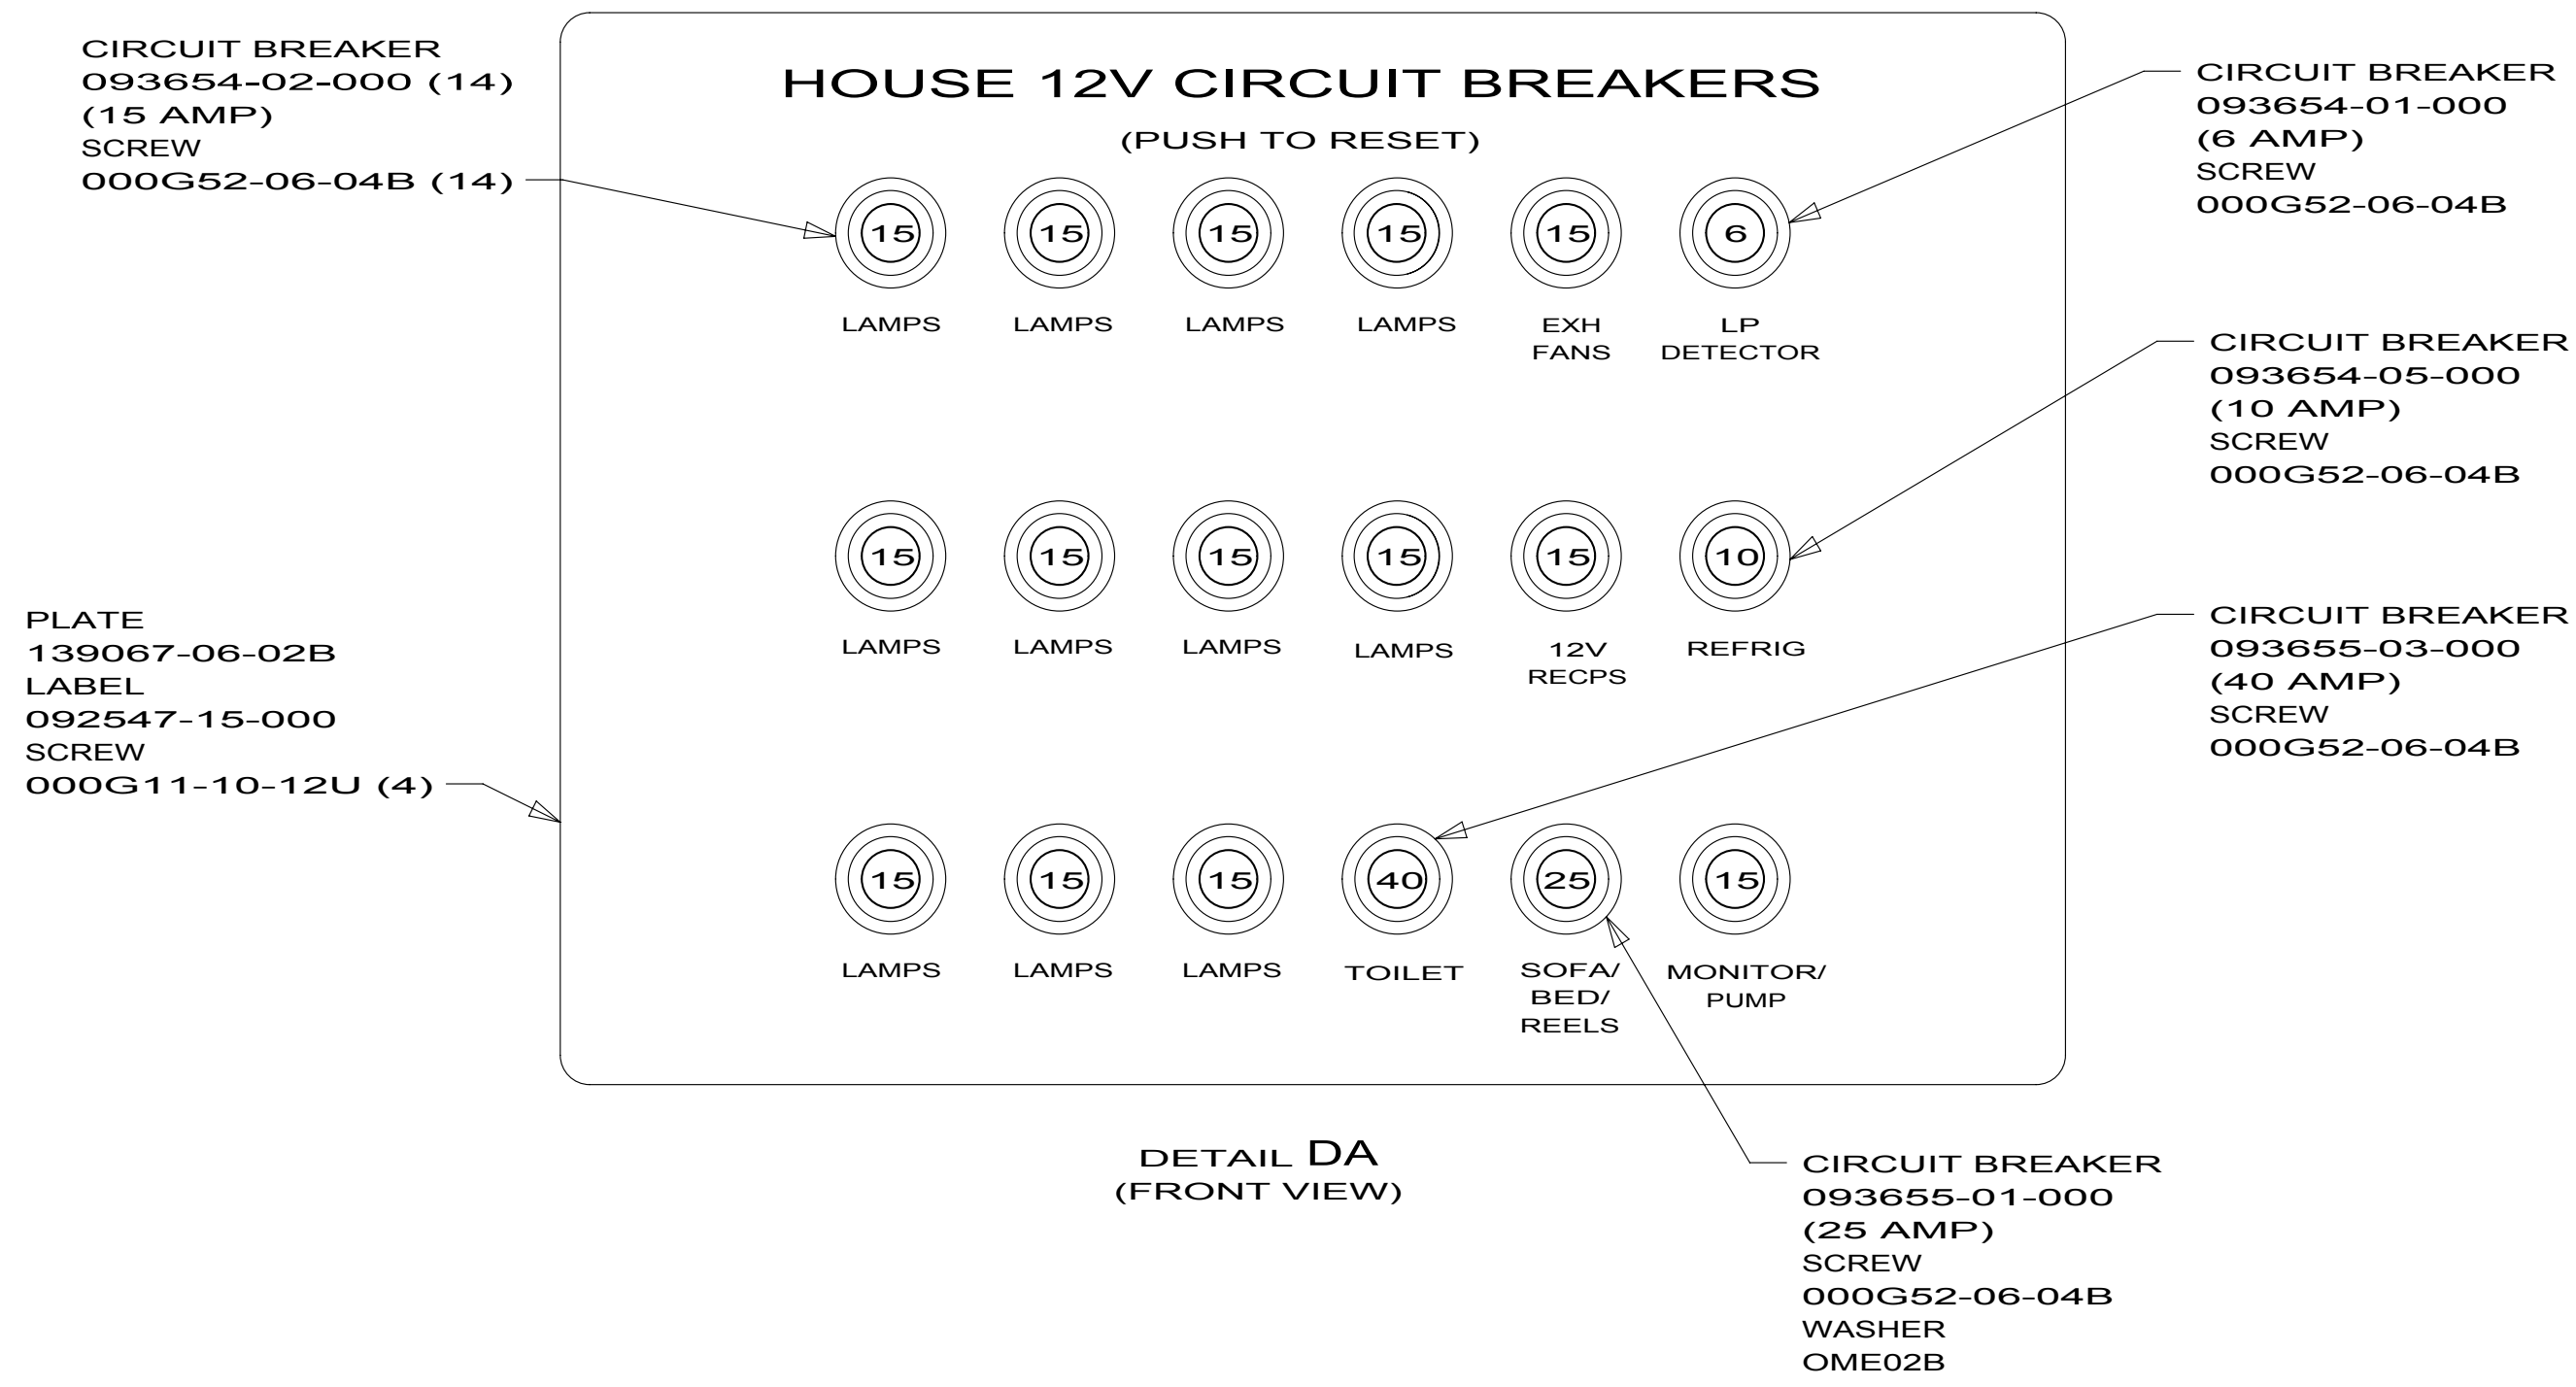
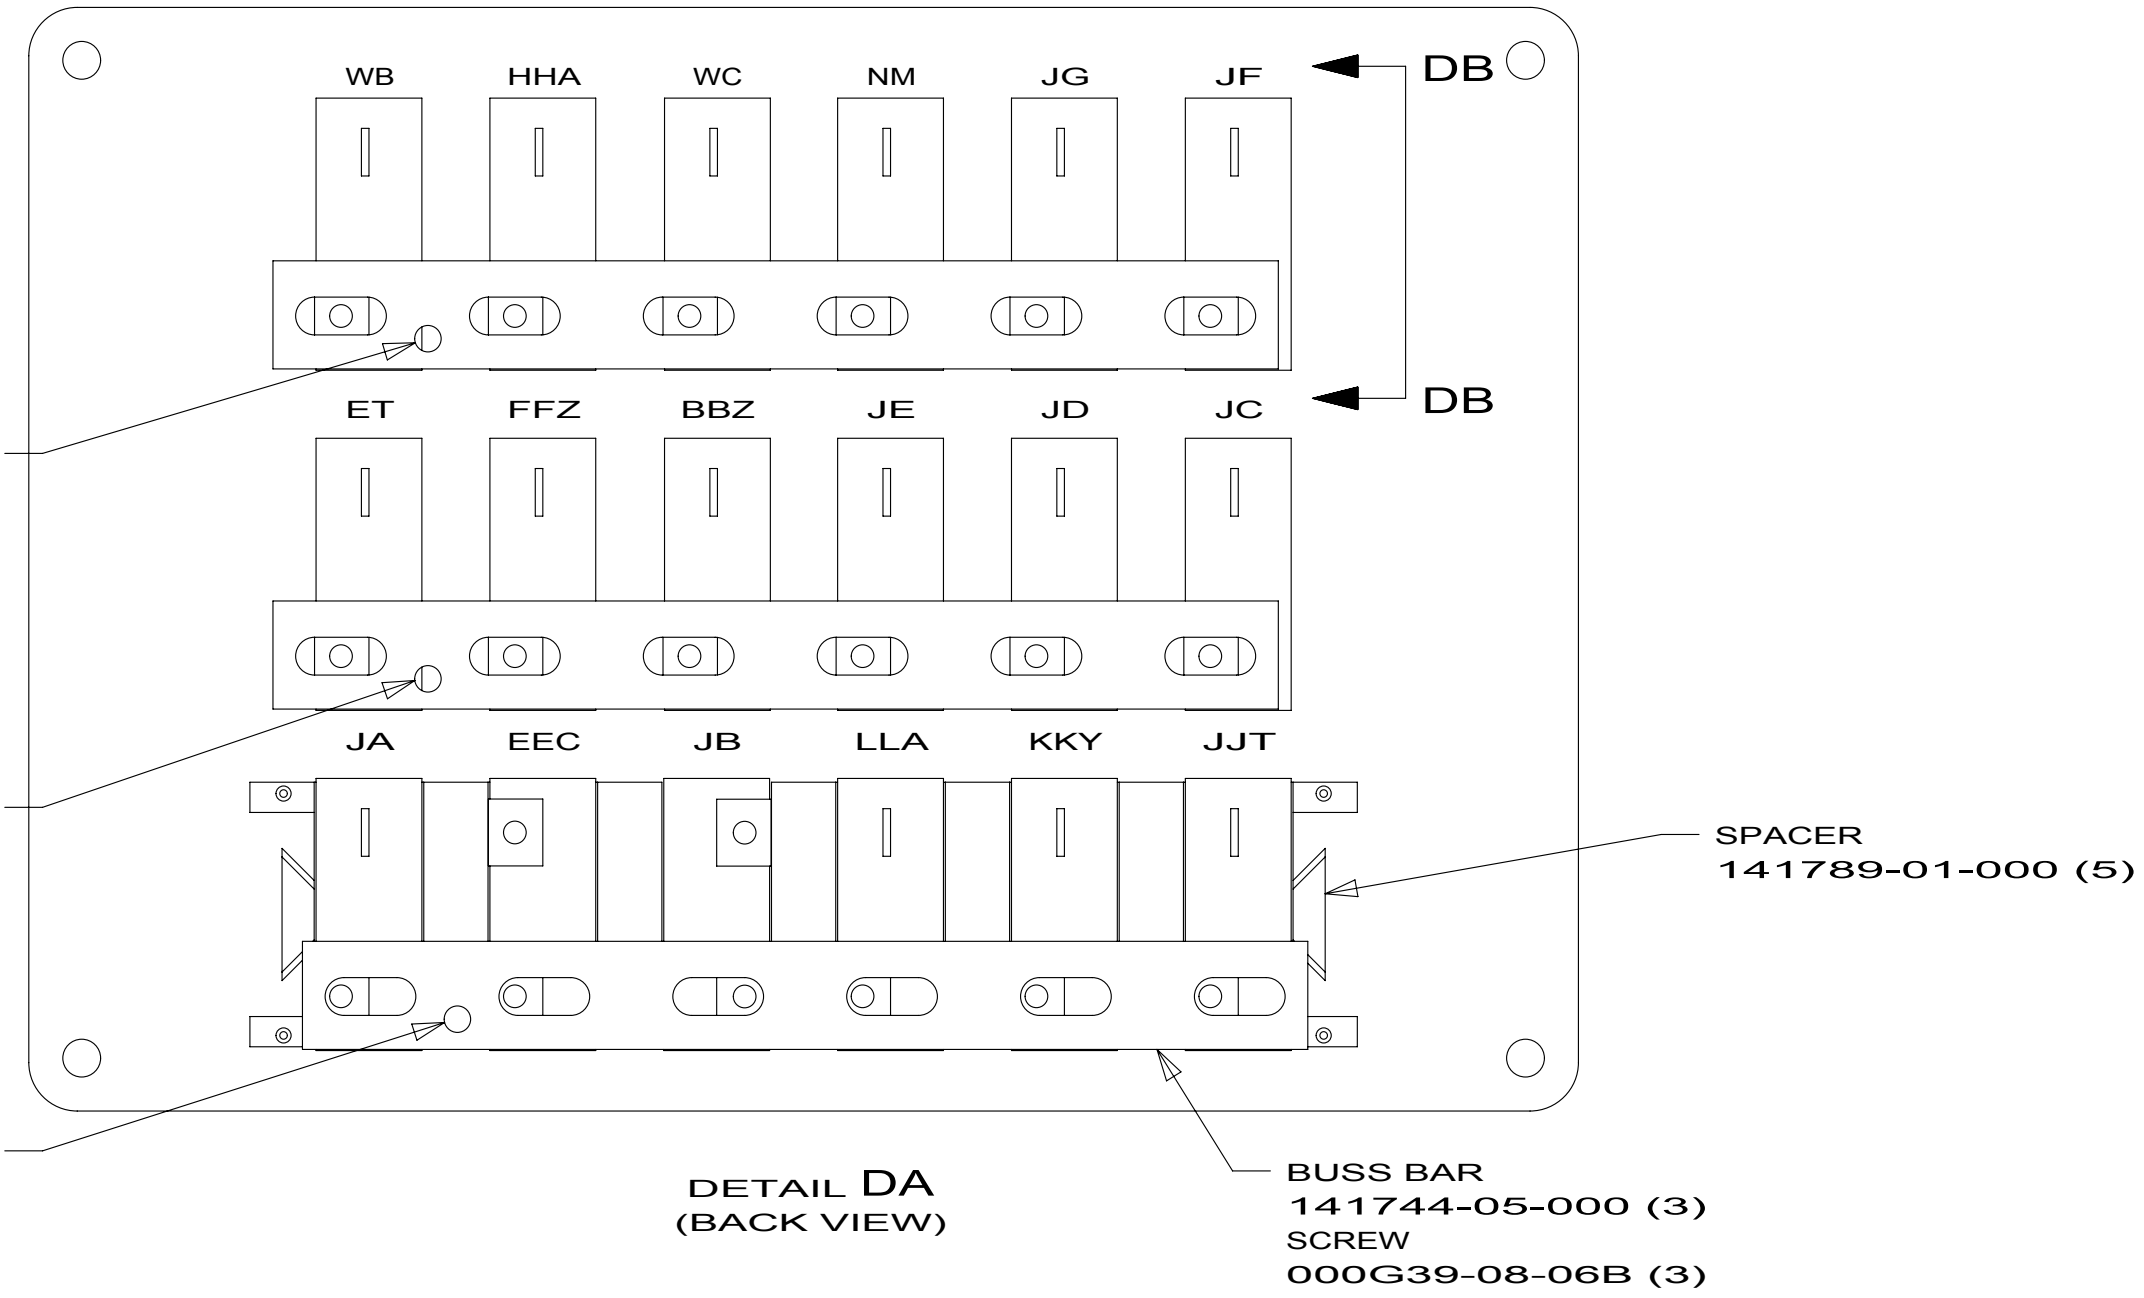
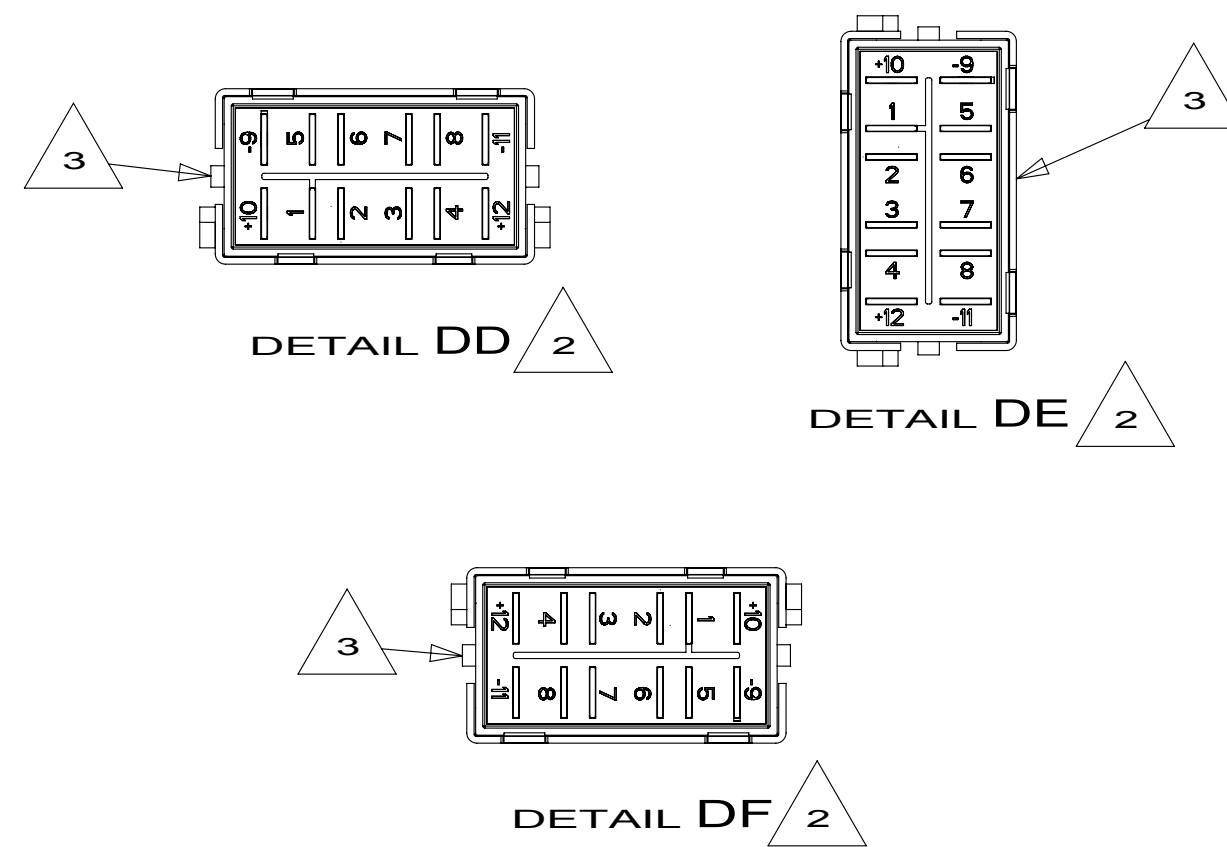
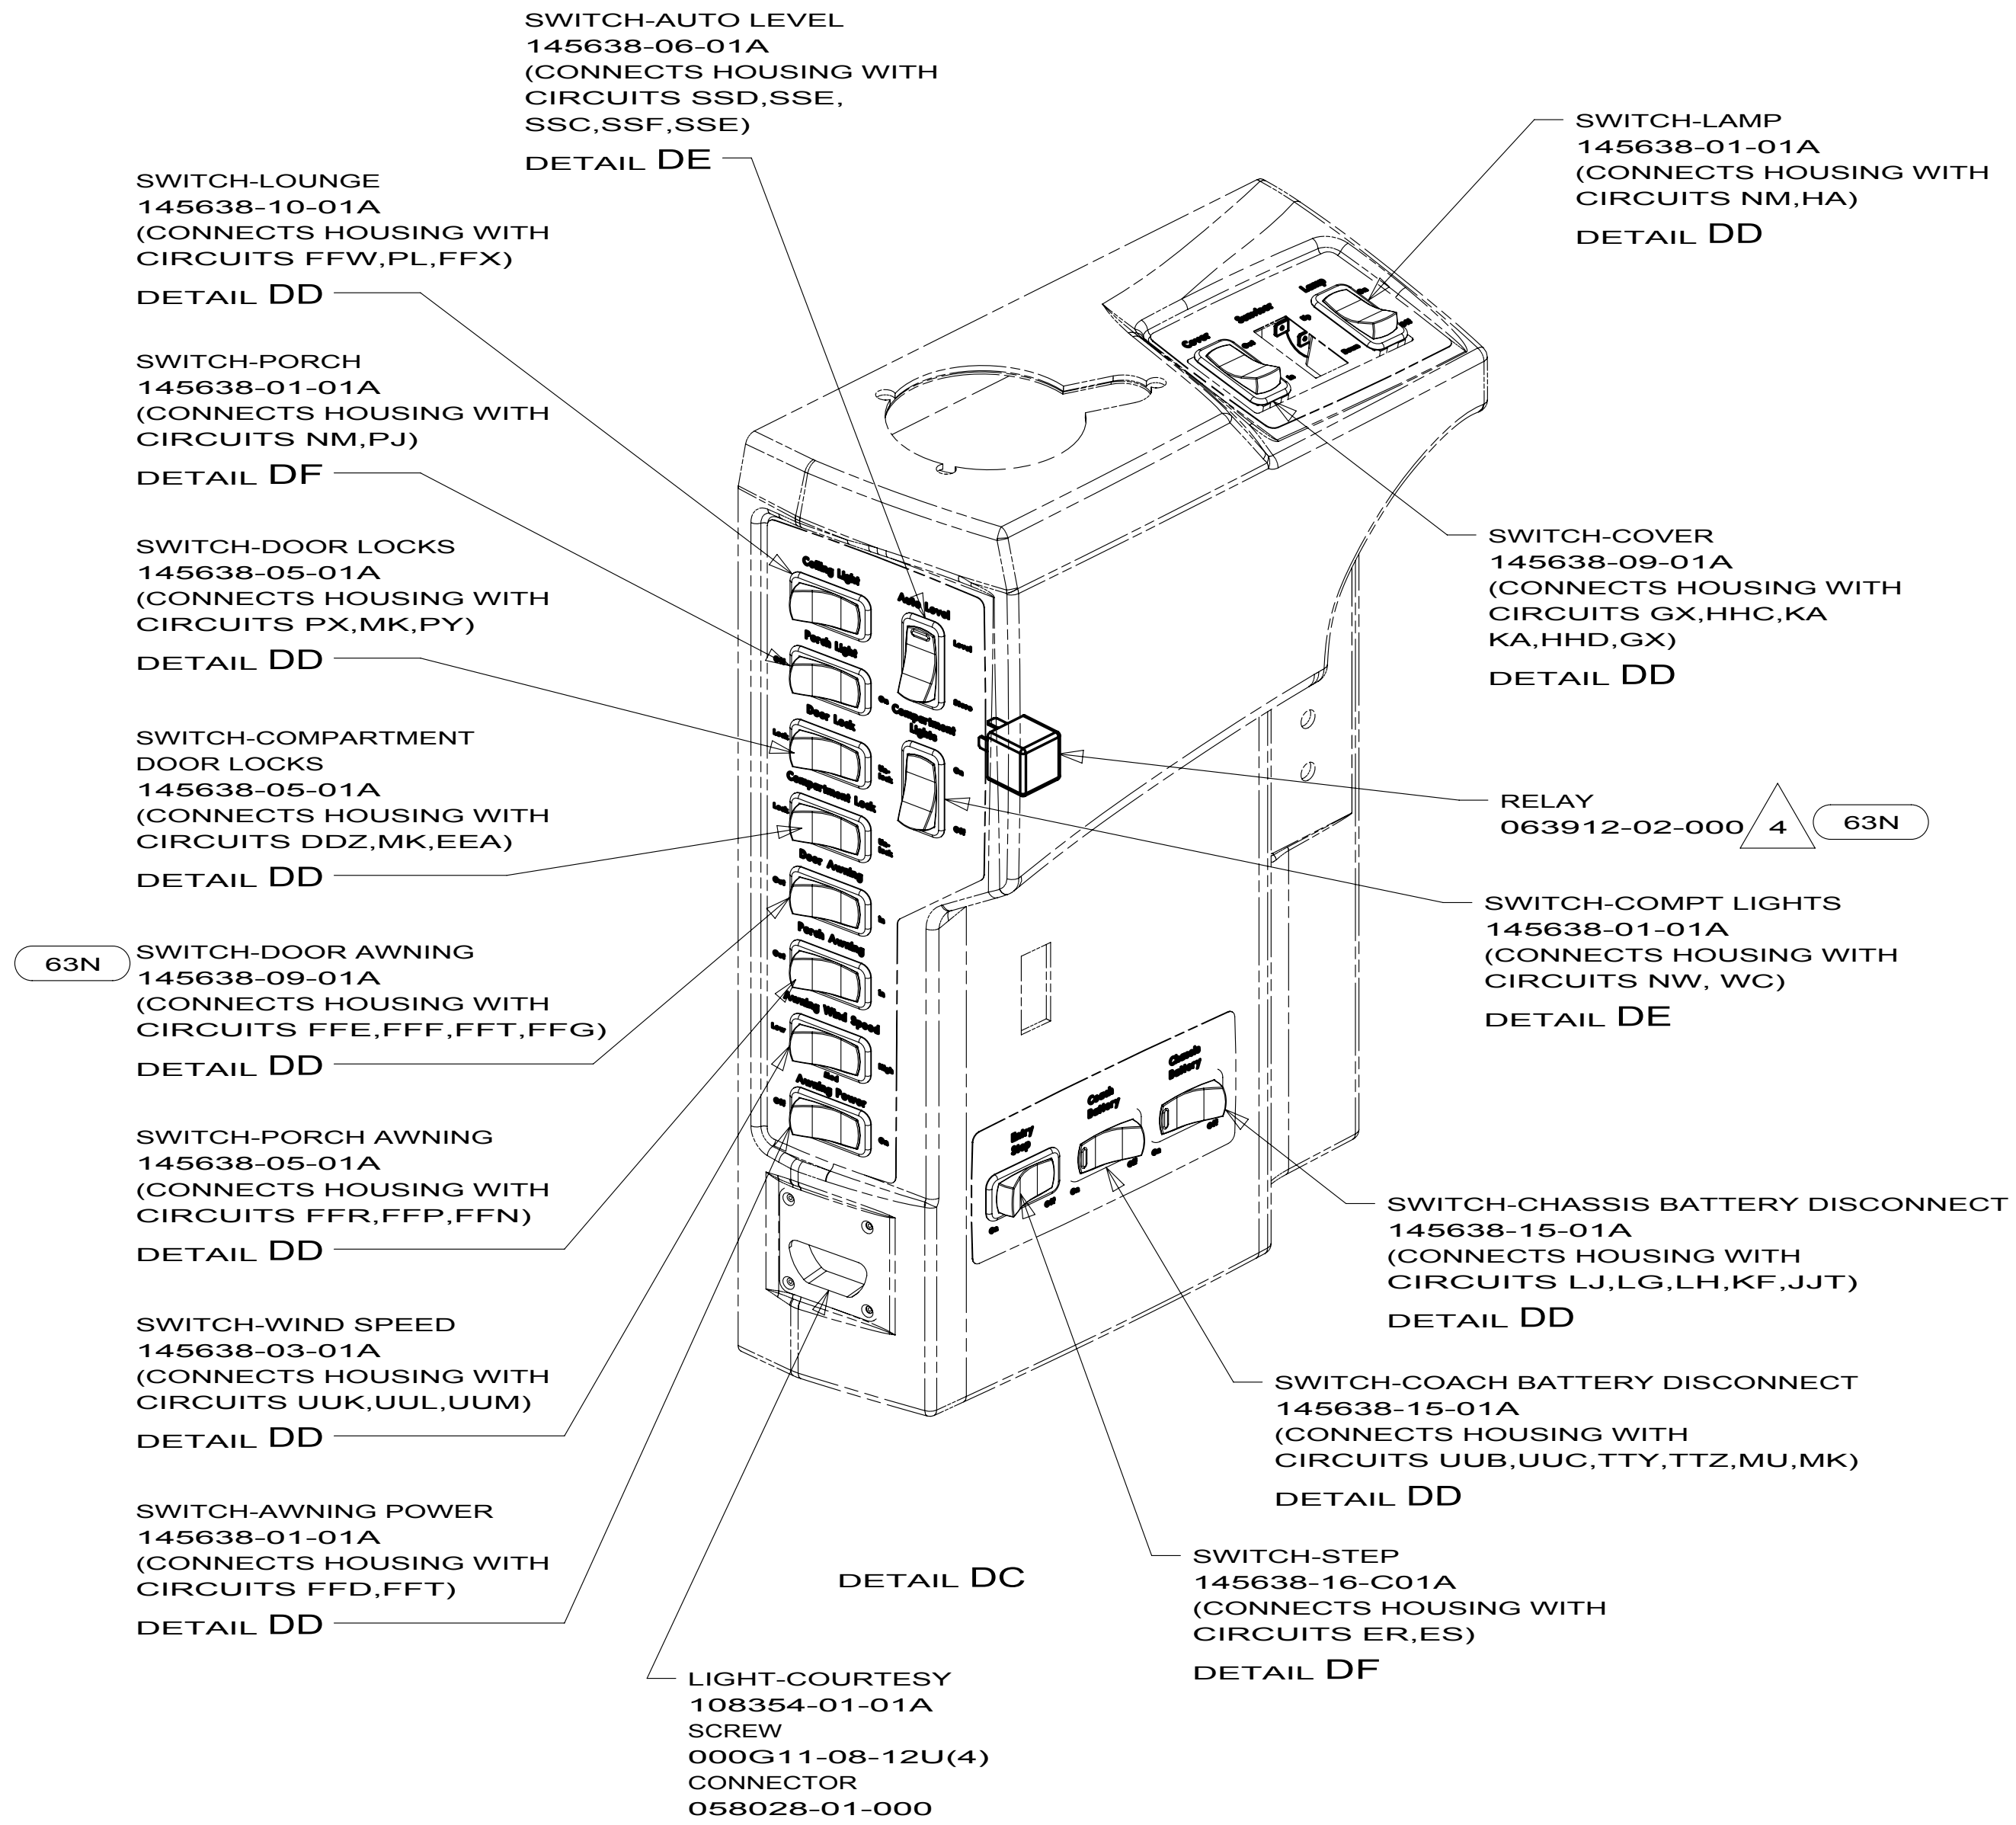
- ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000





- 4 SCREW RELAY HOUSING TO SIDEWALL WITH SCREW 000G11-10-12U.
- 3 WITH SWITCH INSTALLED, THIS SIDE OF SWITCH WILL FACE LEFT SIDEWALL.
- 2 DETAIL IS LOOKING AT SWITCH FROM THE BACKSIDE OF SWITCH WHEN IT IS INSTALLED.

1. ALL WIRES TO BE SECURED WITH CLAMP 010495 OR 010497 OR WIRE TIE 008343 OR 108046 EVERY 600MM, USE SCREW 000G67-XX-XXX OR 000G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	---

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

63N	AWNING-ENTRY, ELECTRIC
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA

1B1 265

FIRST USED





























10 R40CD

DO NOT SCALE DRAWING

TITLE:

WIRING INSTL-BODY,12V

SHEET 4	PART NO 169197
---------	--------------------------

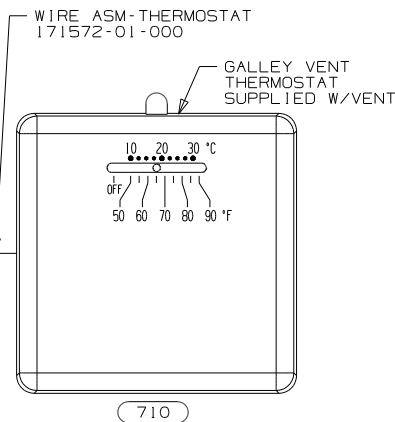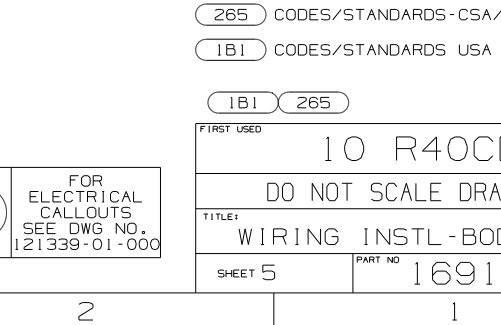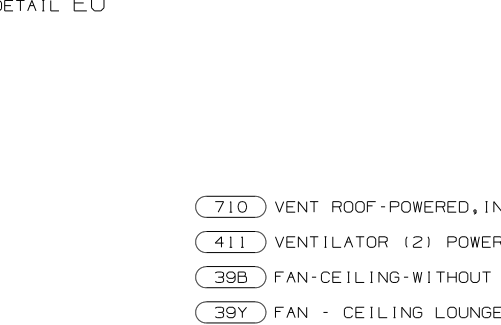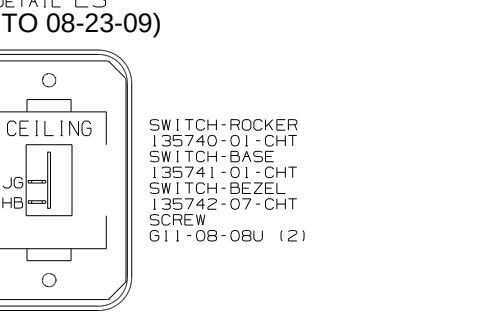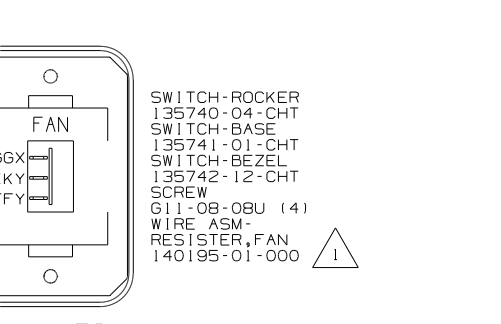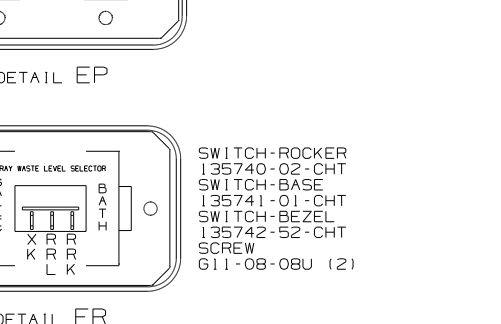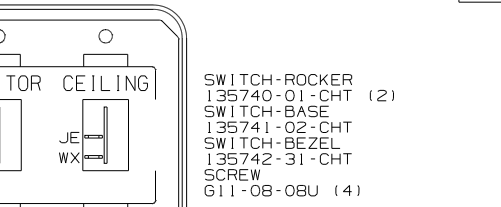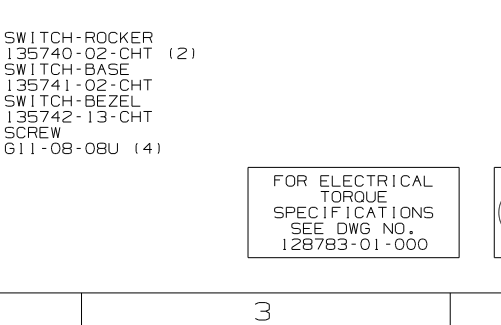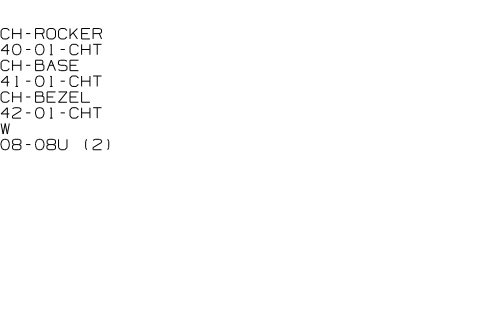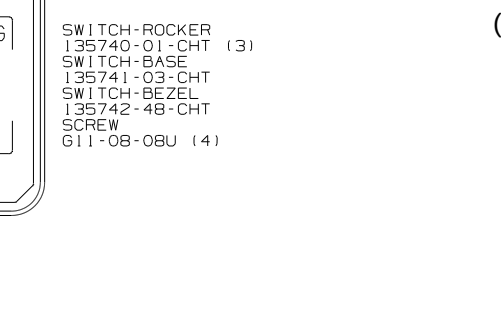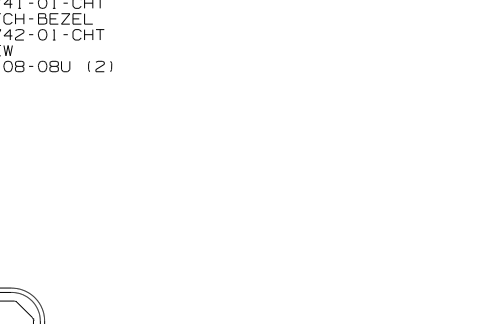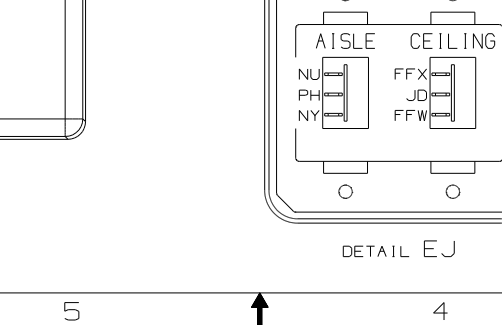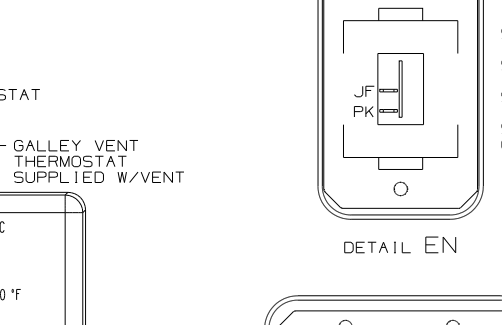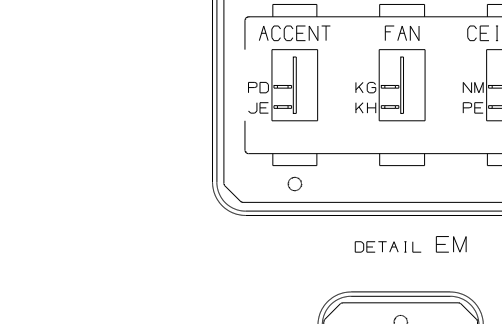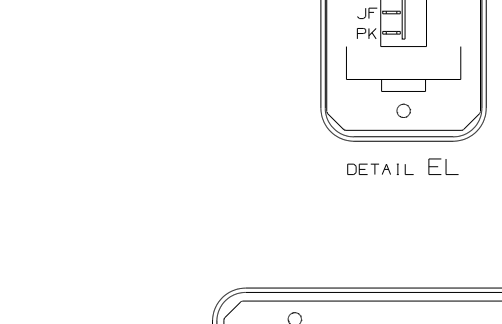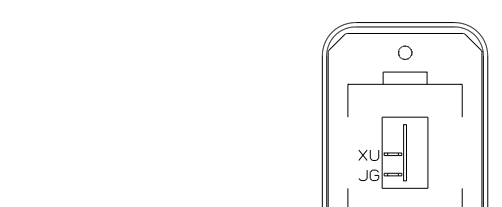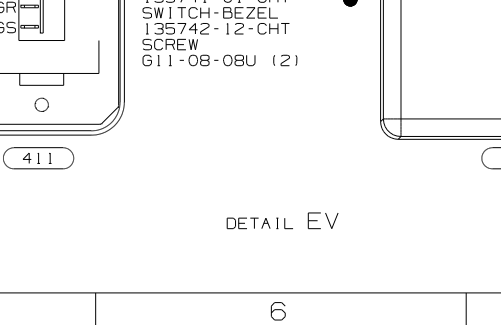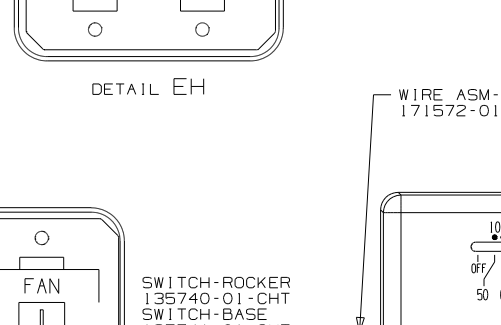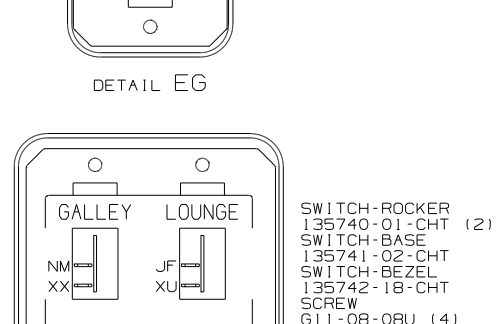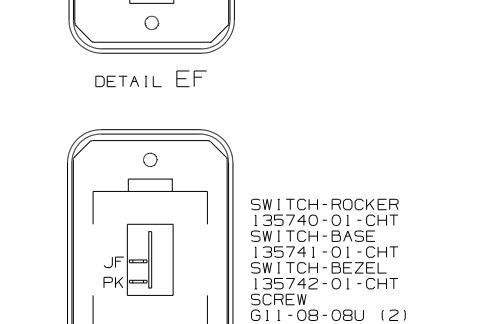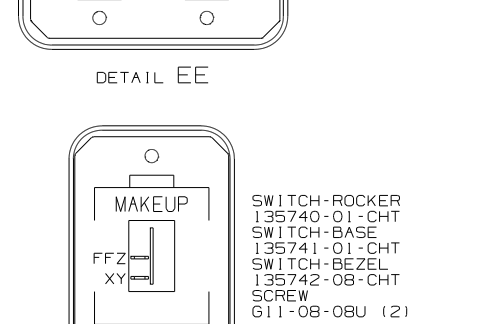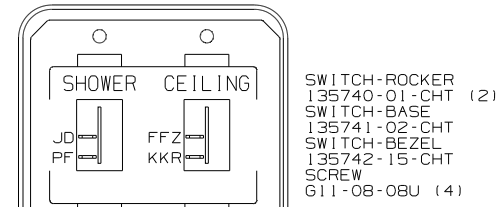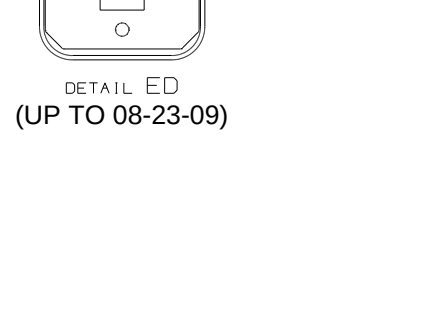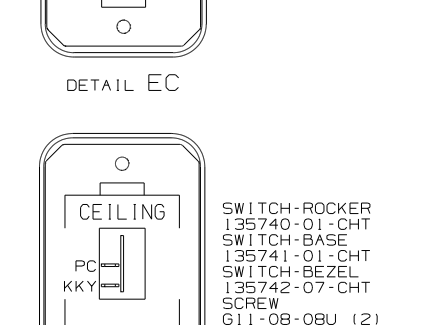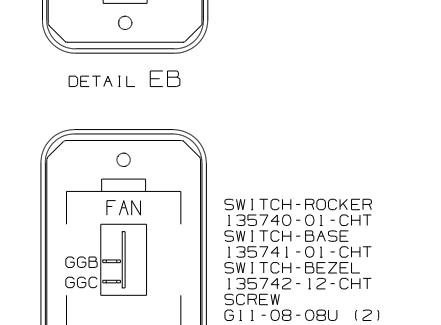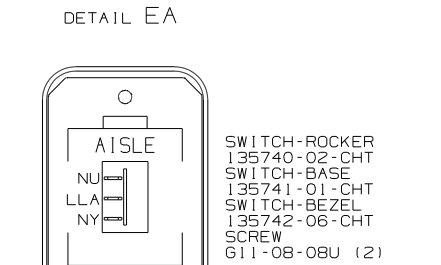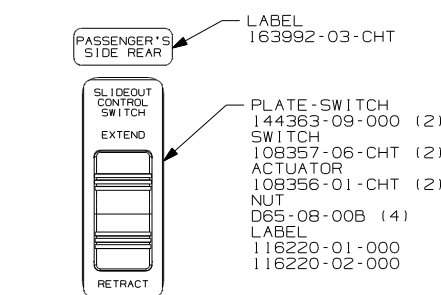

NOTES:




















1 CONNECT WIRE ASM-RESISTOR, FAN TO 2-PIN HOUSING LOCATED BY THE SWITCH WIRES.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 710 VENT ROOF-POWERED, INSULATED
- 411 VENTILATOR (2) POWER VENT
- 39B FAN-CEILING-WITHOUT
- 39Y FAN - CEILING LOUNGE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED	10 R40CD
TITLE	DO NOT SCALE DRAWING
WIRING INSTL-BODY, 12V	
SHEET 5	PART NO 169197 REV L

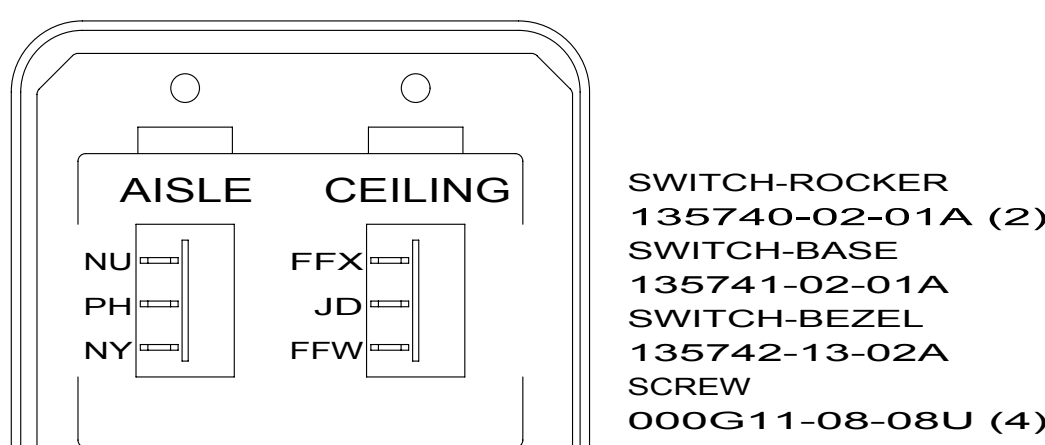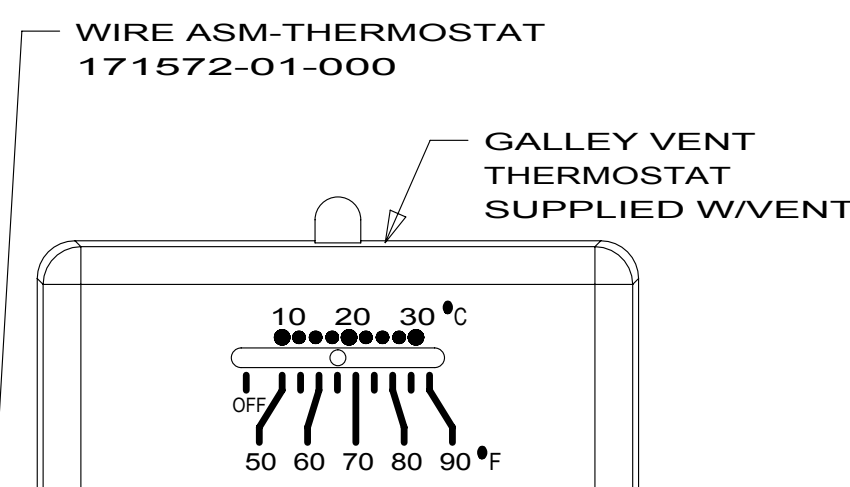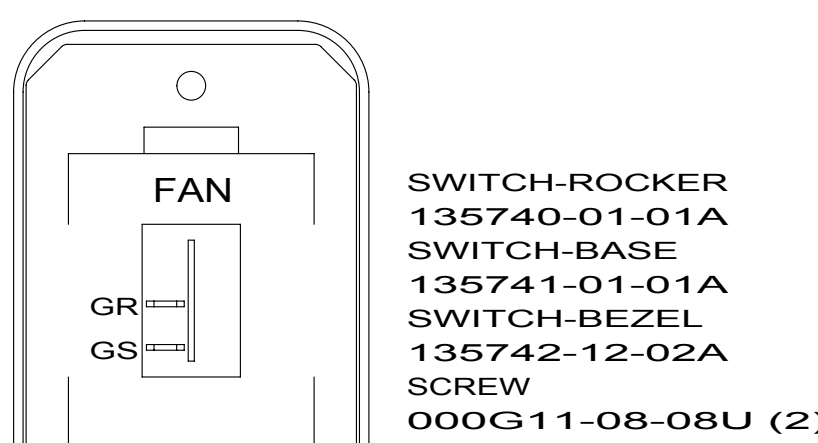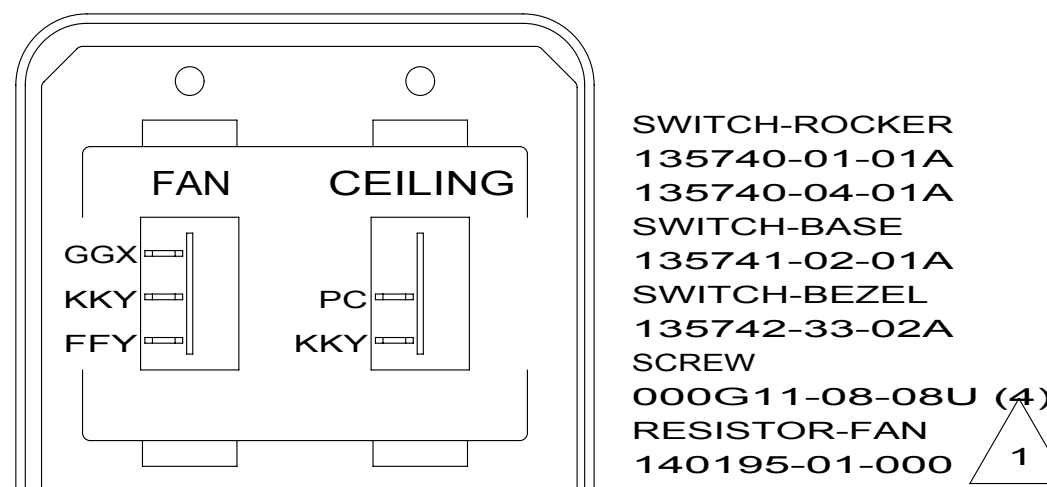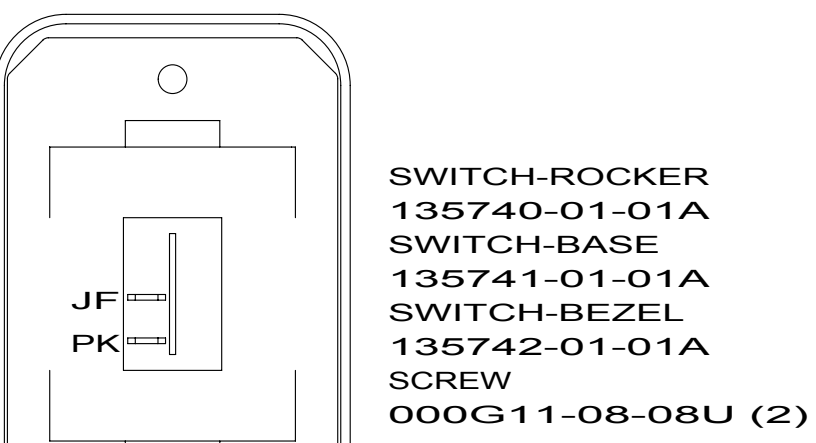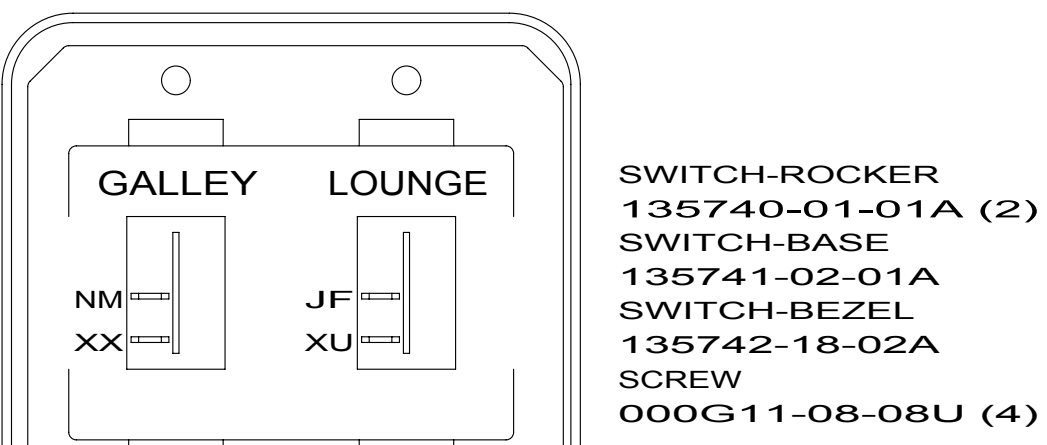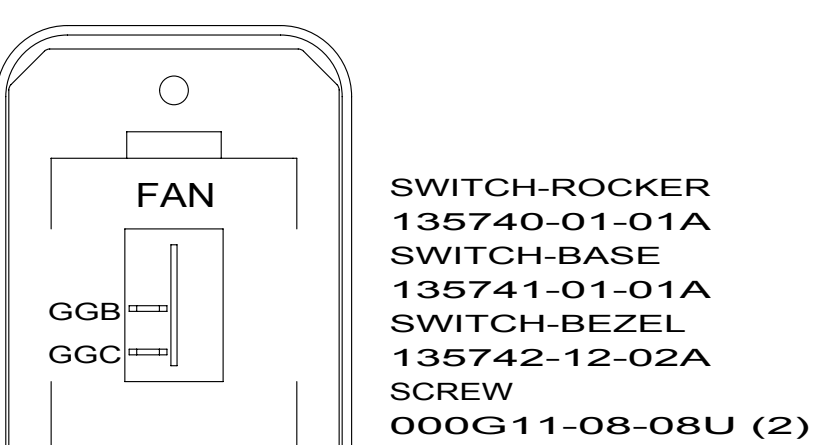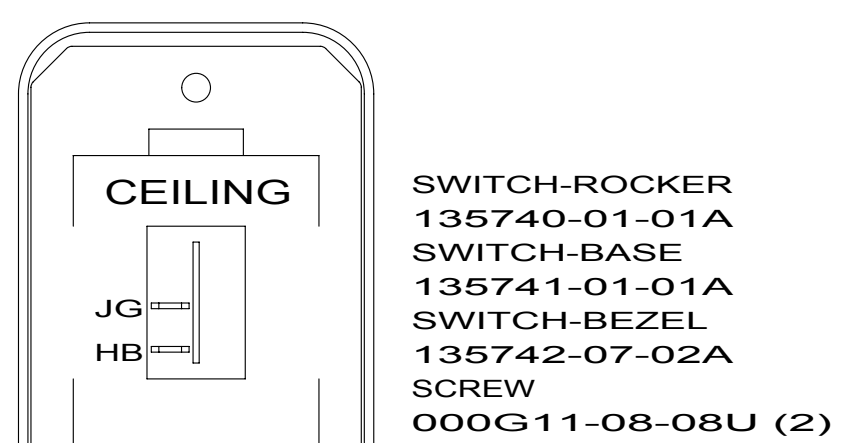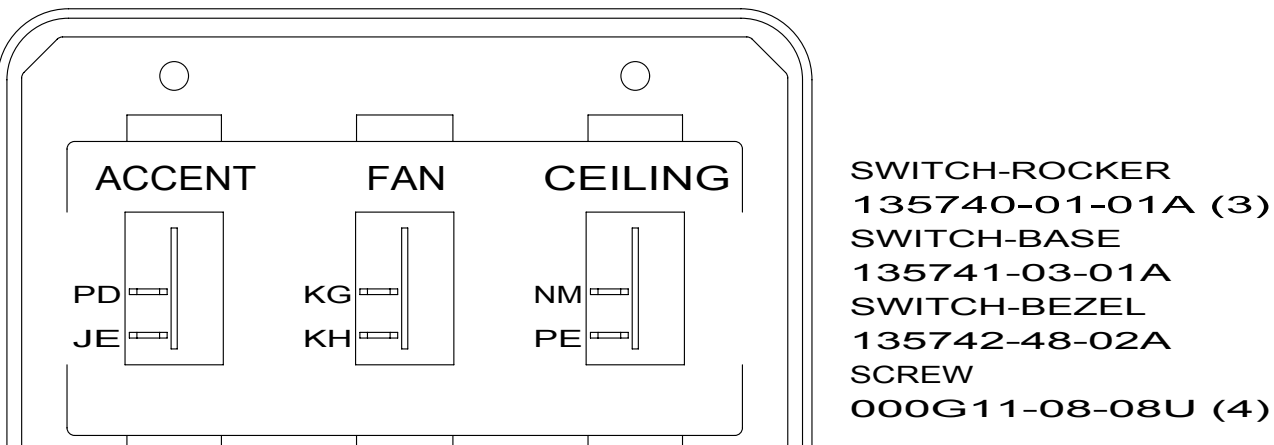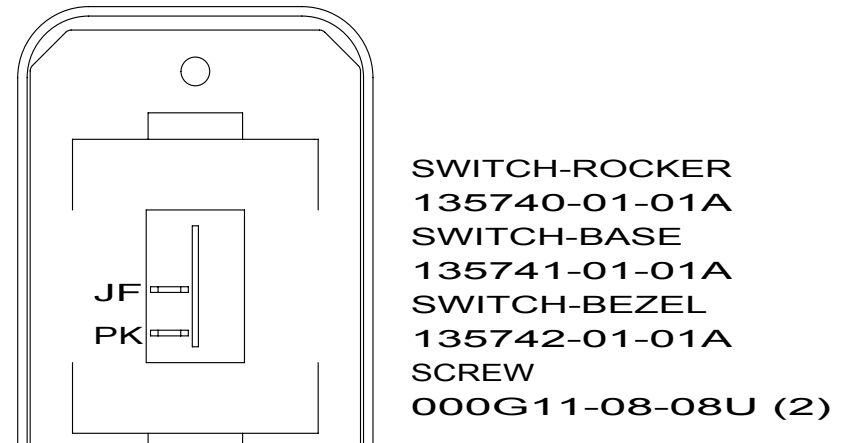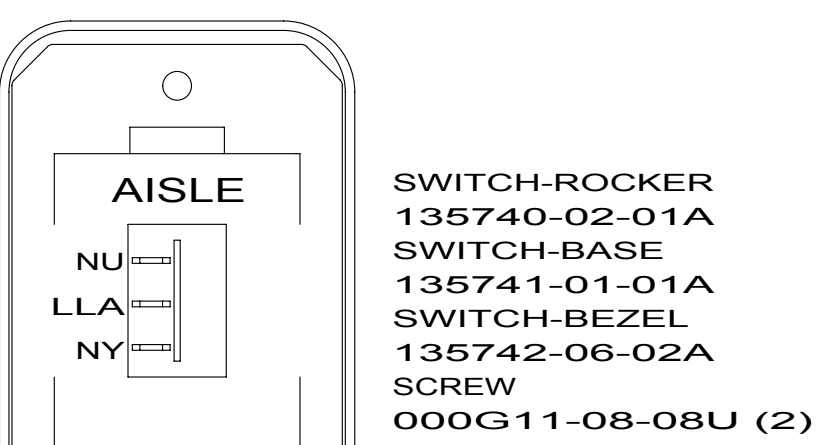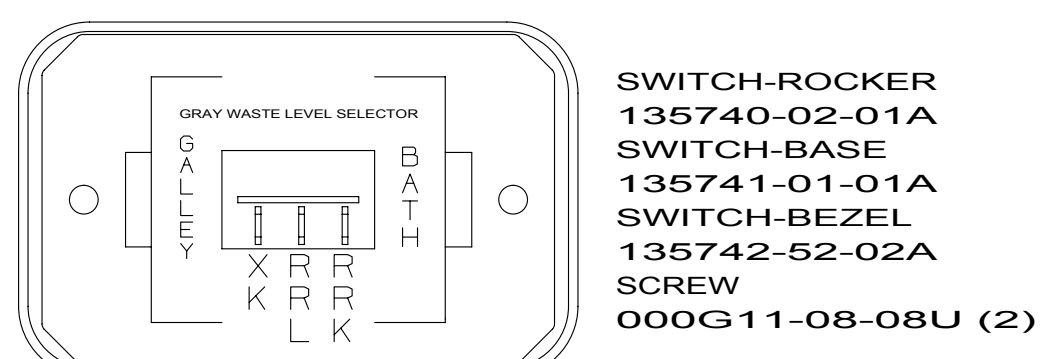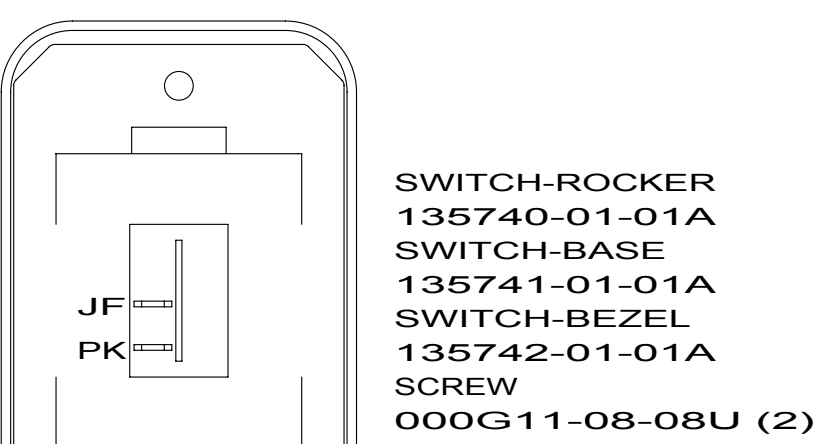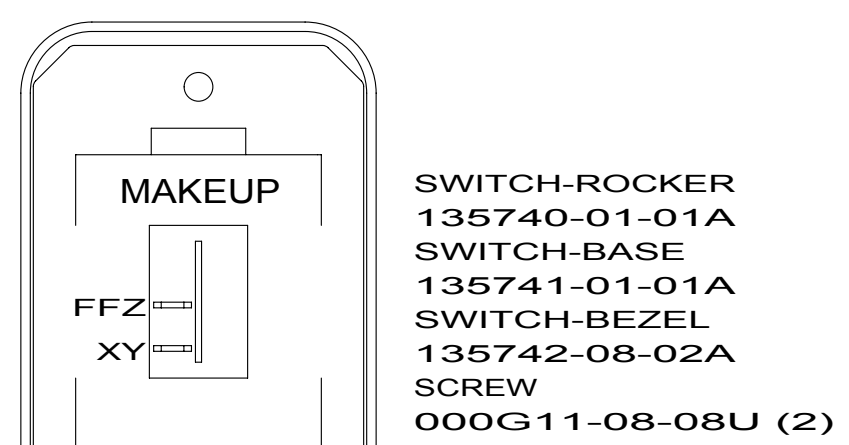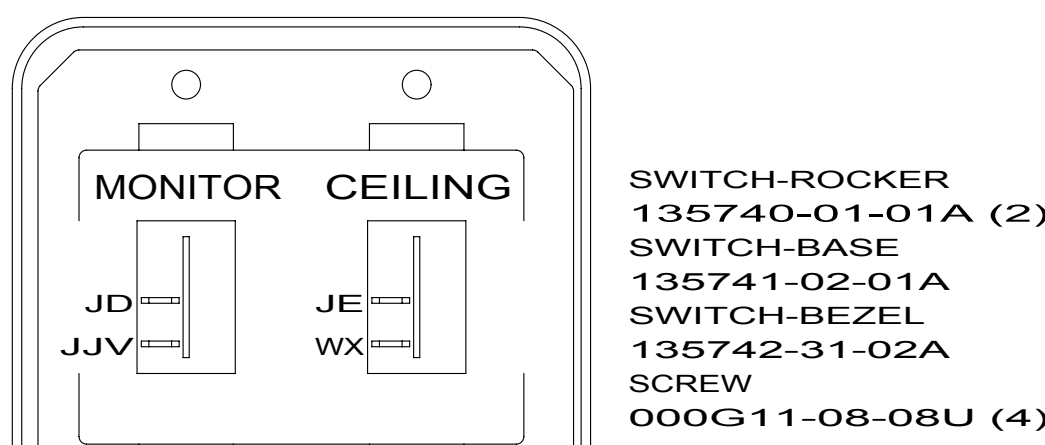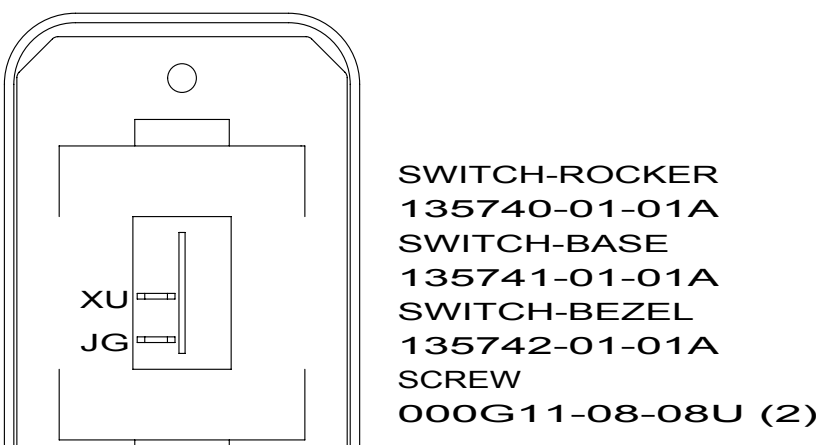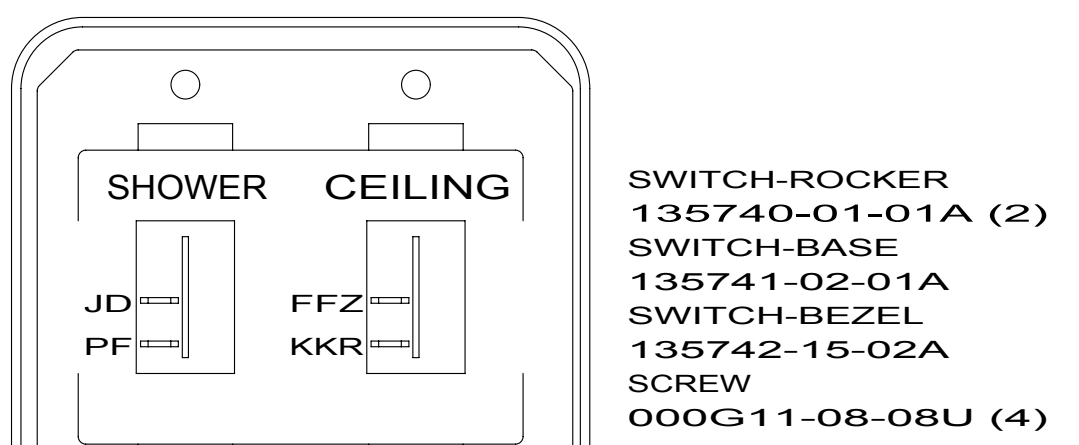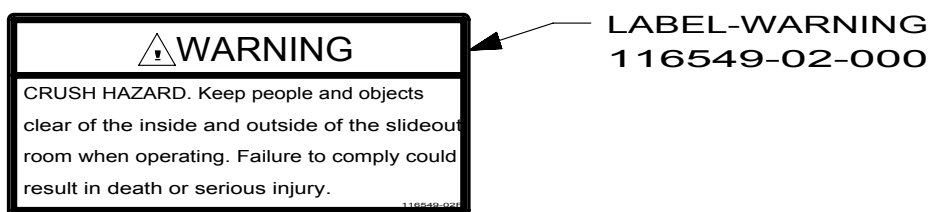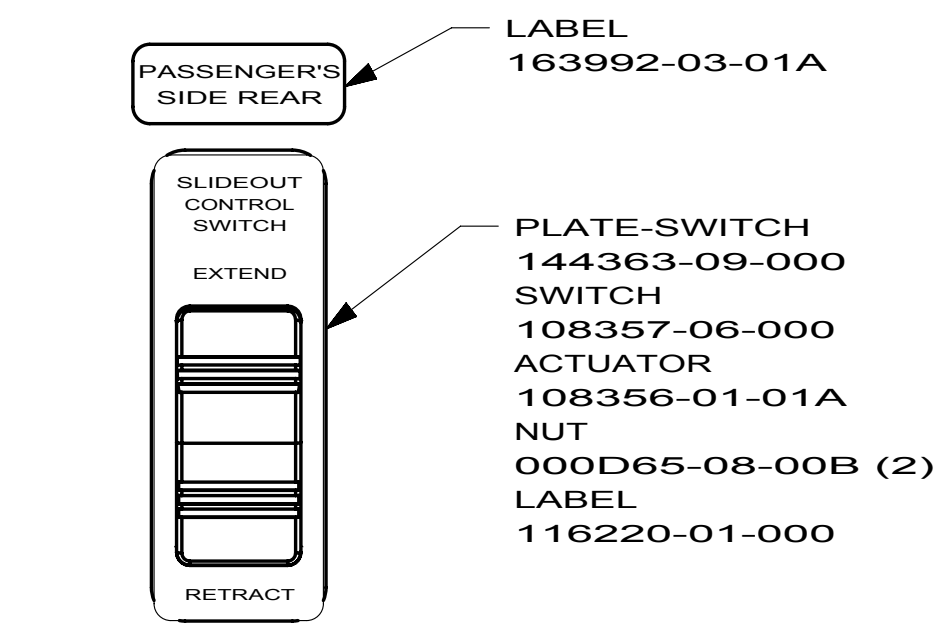

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

- 710 VENT ROOF-POWERED,INSULATED
- 411 VENTILATOR (2) POWER VENT
- 39B FAN-CEILING-WITHOUT
- 39Y FAN - CEILING LOUNGE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 R40CD		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 5B	PART NO 169197	REV

1 CONNECT WIRE ASM-RESISTOR,FAN TO 2-PIN HOUSING LOCATED BY THE SWITCH WIRES.

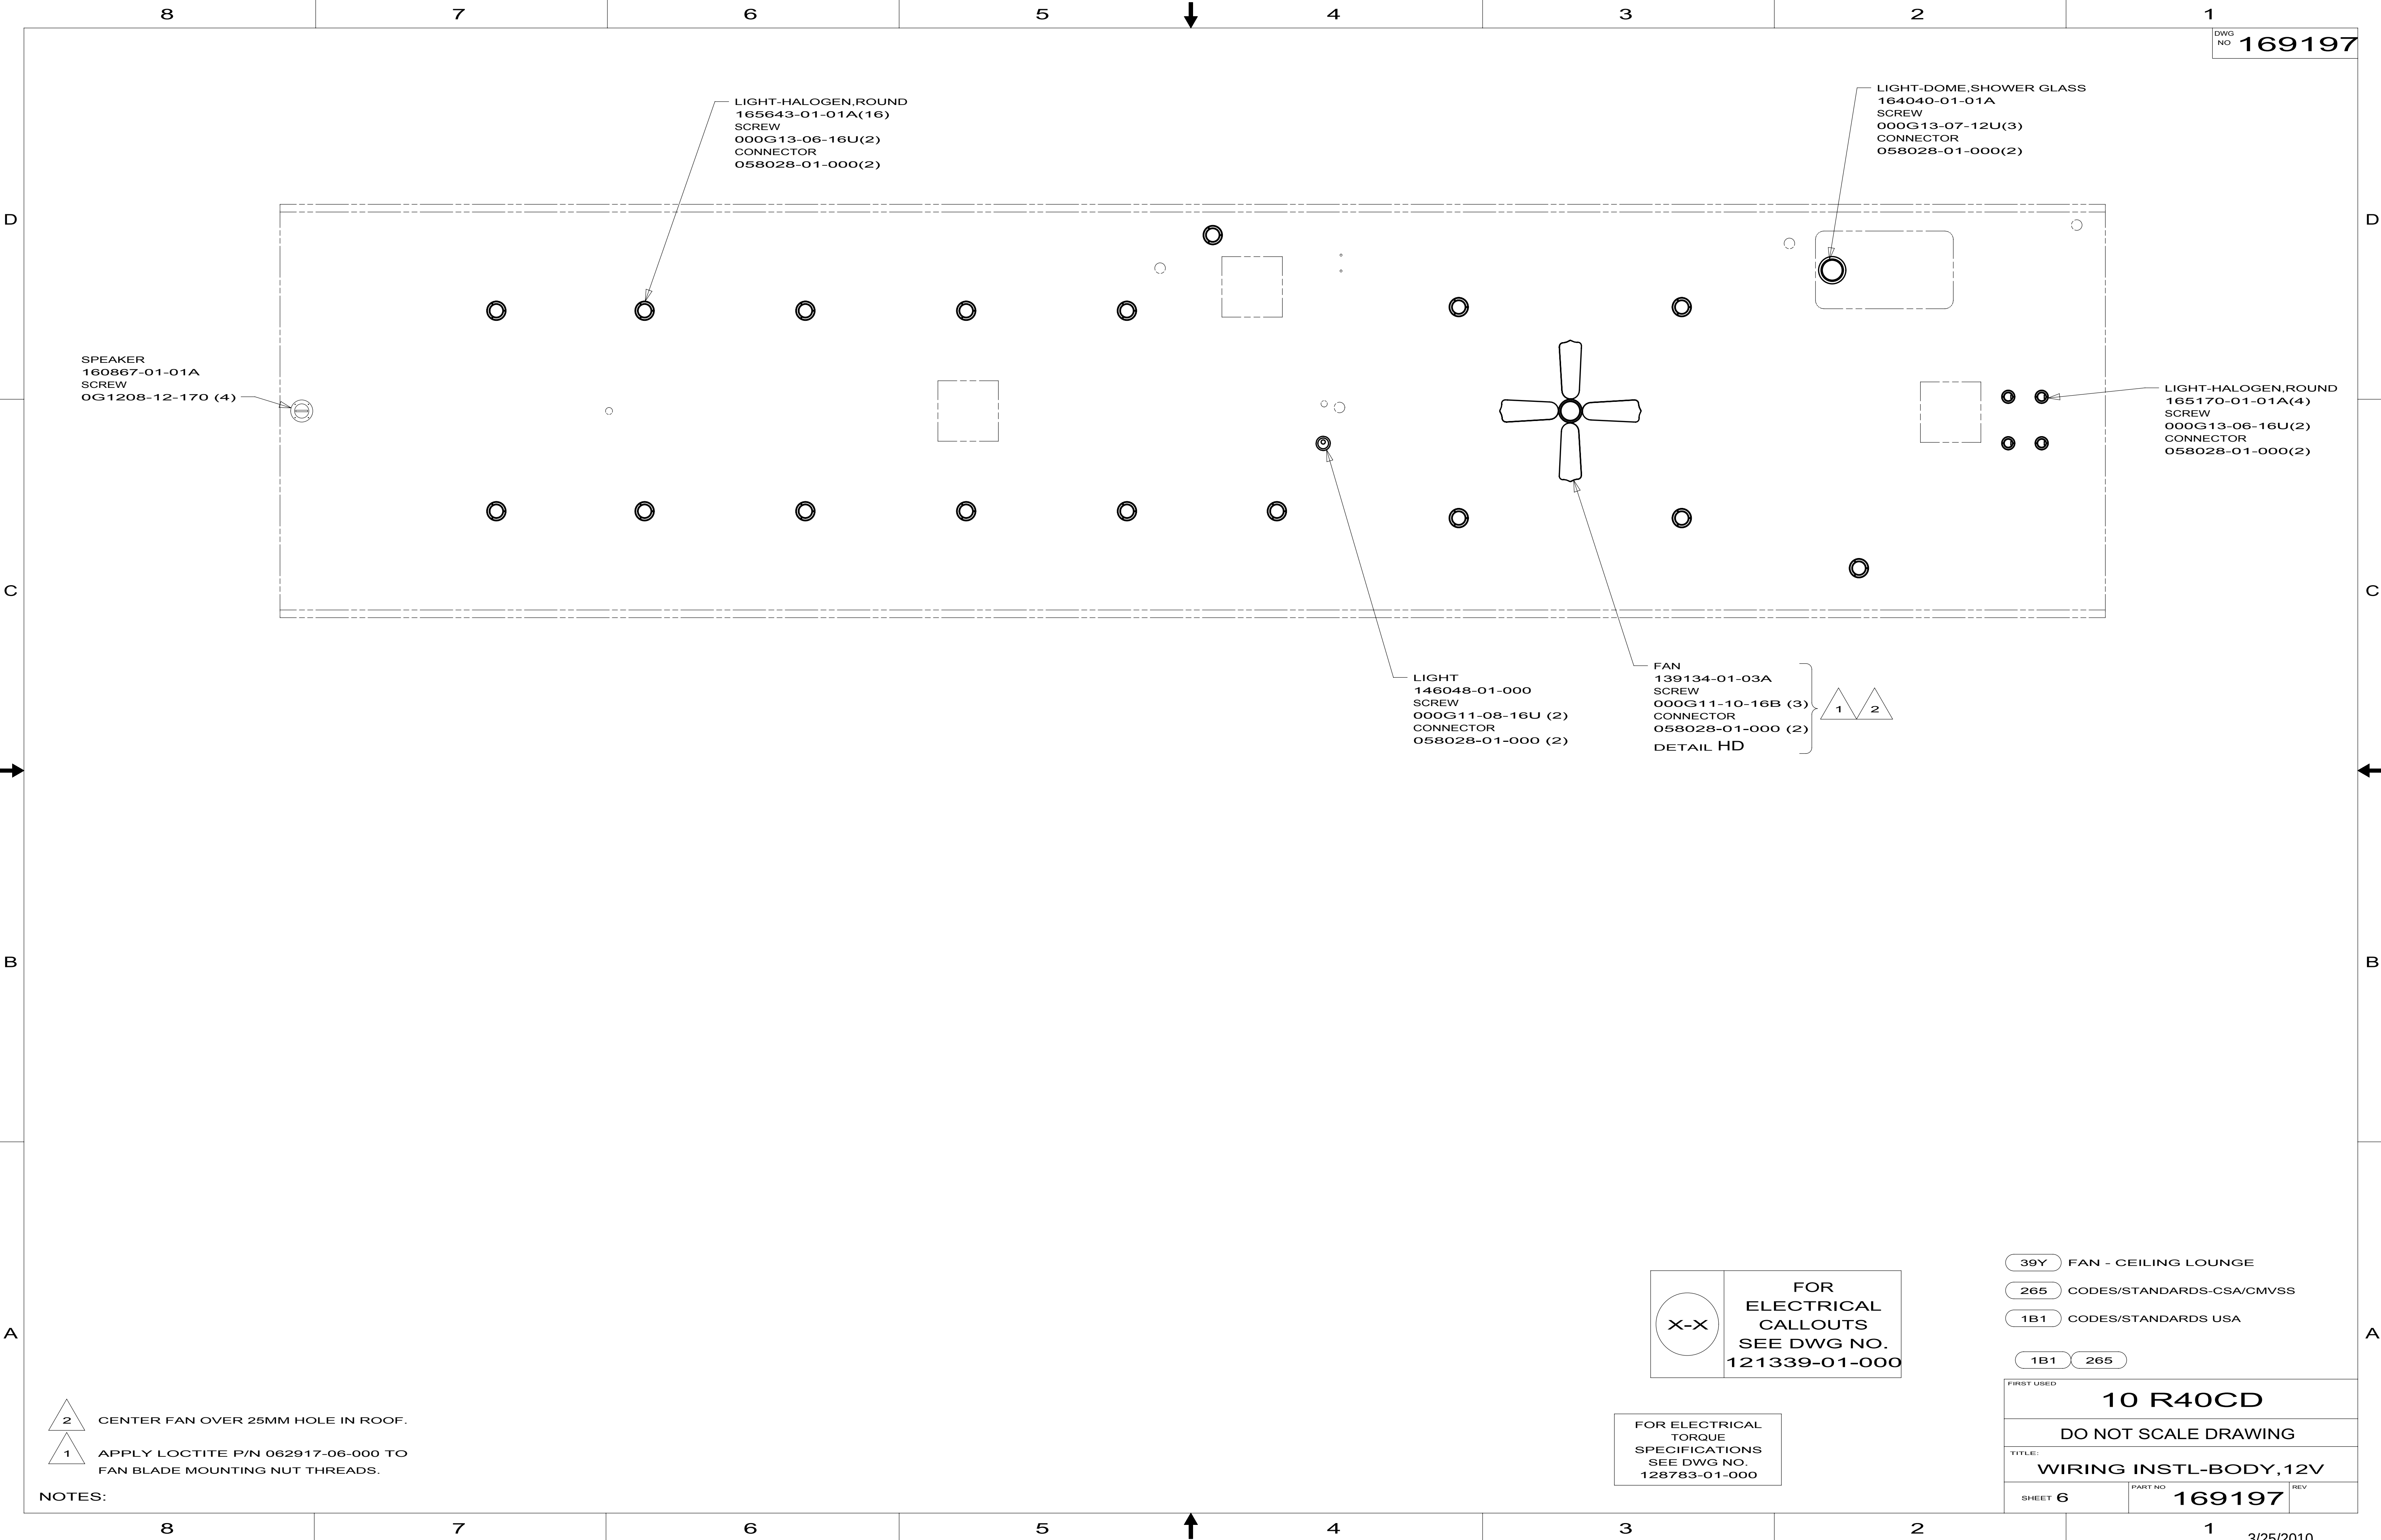NOTES:



LIGHT-HALOGEN,ROUND
165643-01-01A(16)
SCREW
000G13-06-16U(2)
CONNECTOR
058028-01-000(2)

LIGHT-DOME,SHOWER GLASS
164040-01-01A
SCREW
000G13-07-12U(3)
CONNECTOR
058028-01-000(2)

SPEAKER
160867-01-01A
SCREW
OG1208-12-170 (4)

LIGHT-HALOGEN,ROUND
165170-01-01A(4)
SCREW
000G13-06-16U(2)
CONNECTOR
058028-01-000(2)

LIGHT
146048-01-000
SCREW
000G11-08-16U (2)
CONNECTOR
058028-01-000 (2)

FAN
139134-01-03A
SCREW
000G11-10-16B (3)
CONNECTOR
058028-01-000 (2)
DETAIL HD



2 CENTER FAN OVER 25MM HOLE IN ROOF.
1 APPLY LOCTITE P/N 062917-06-000 TO
FAN BLADE MOUNTING NUT THREADS.


FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

39Y FAN - CEILING LOUNGE
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 R40CD		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 6	PART NO 169197	REV

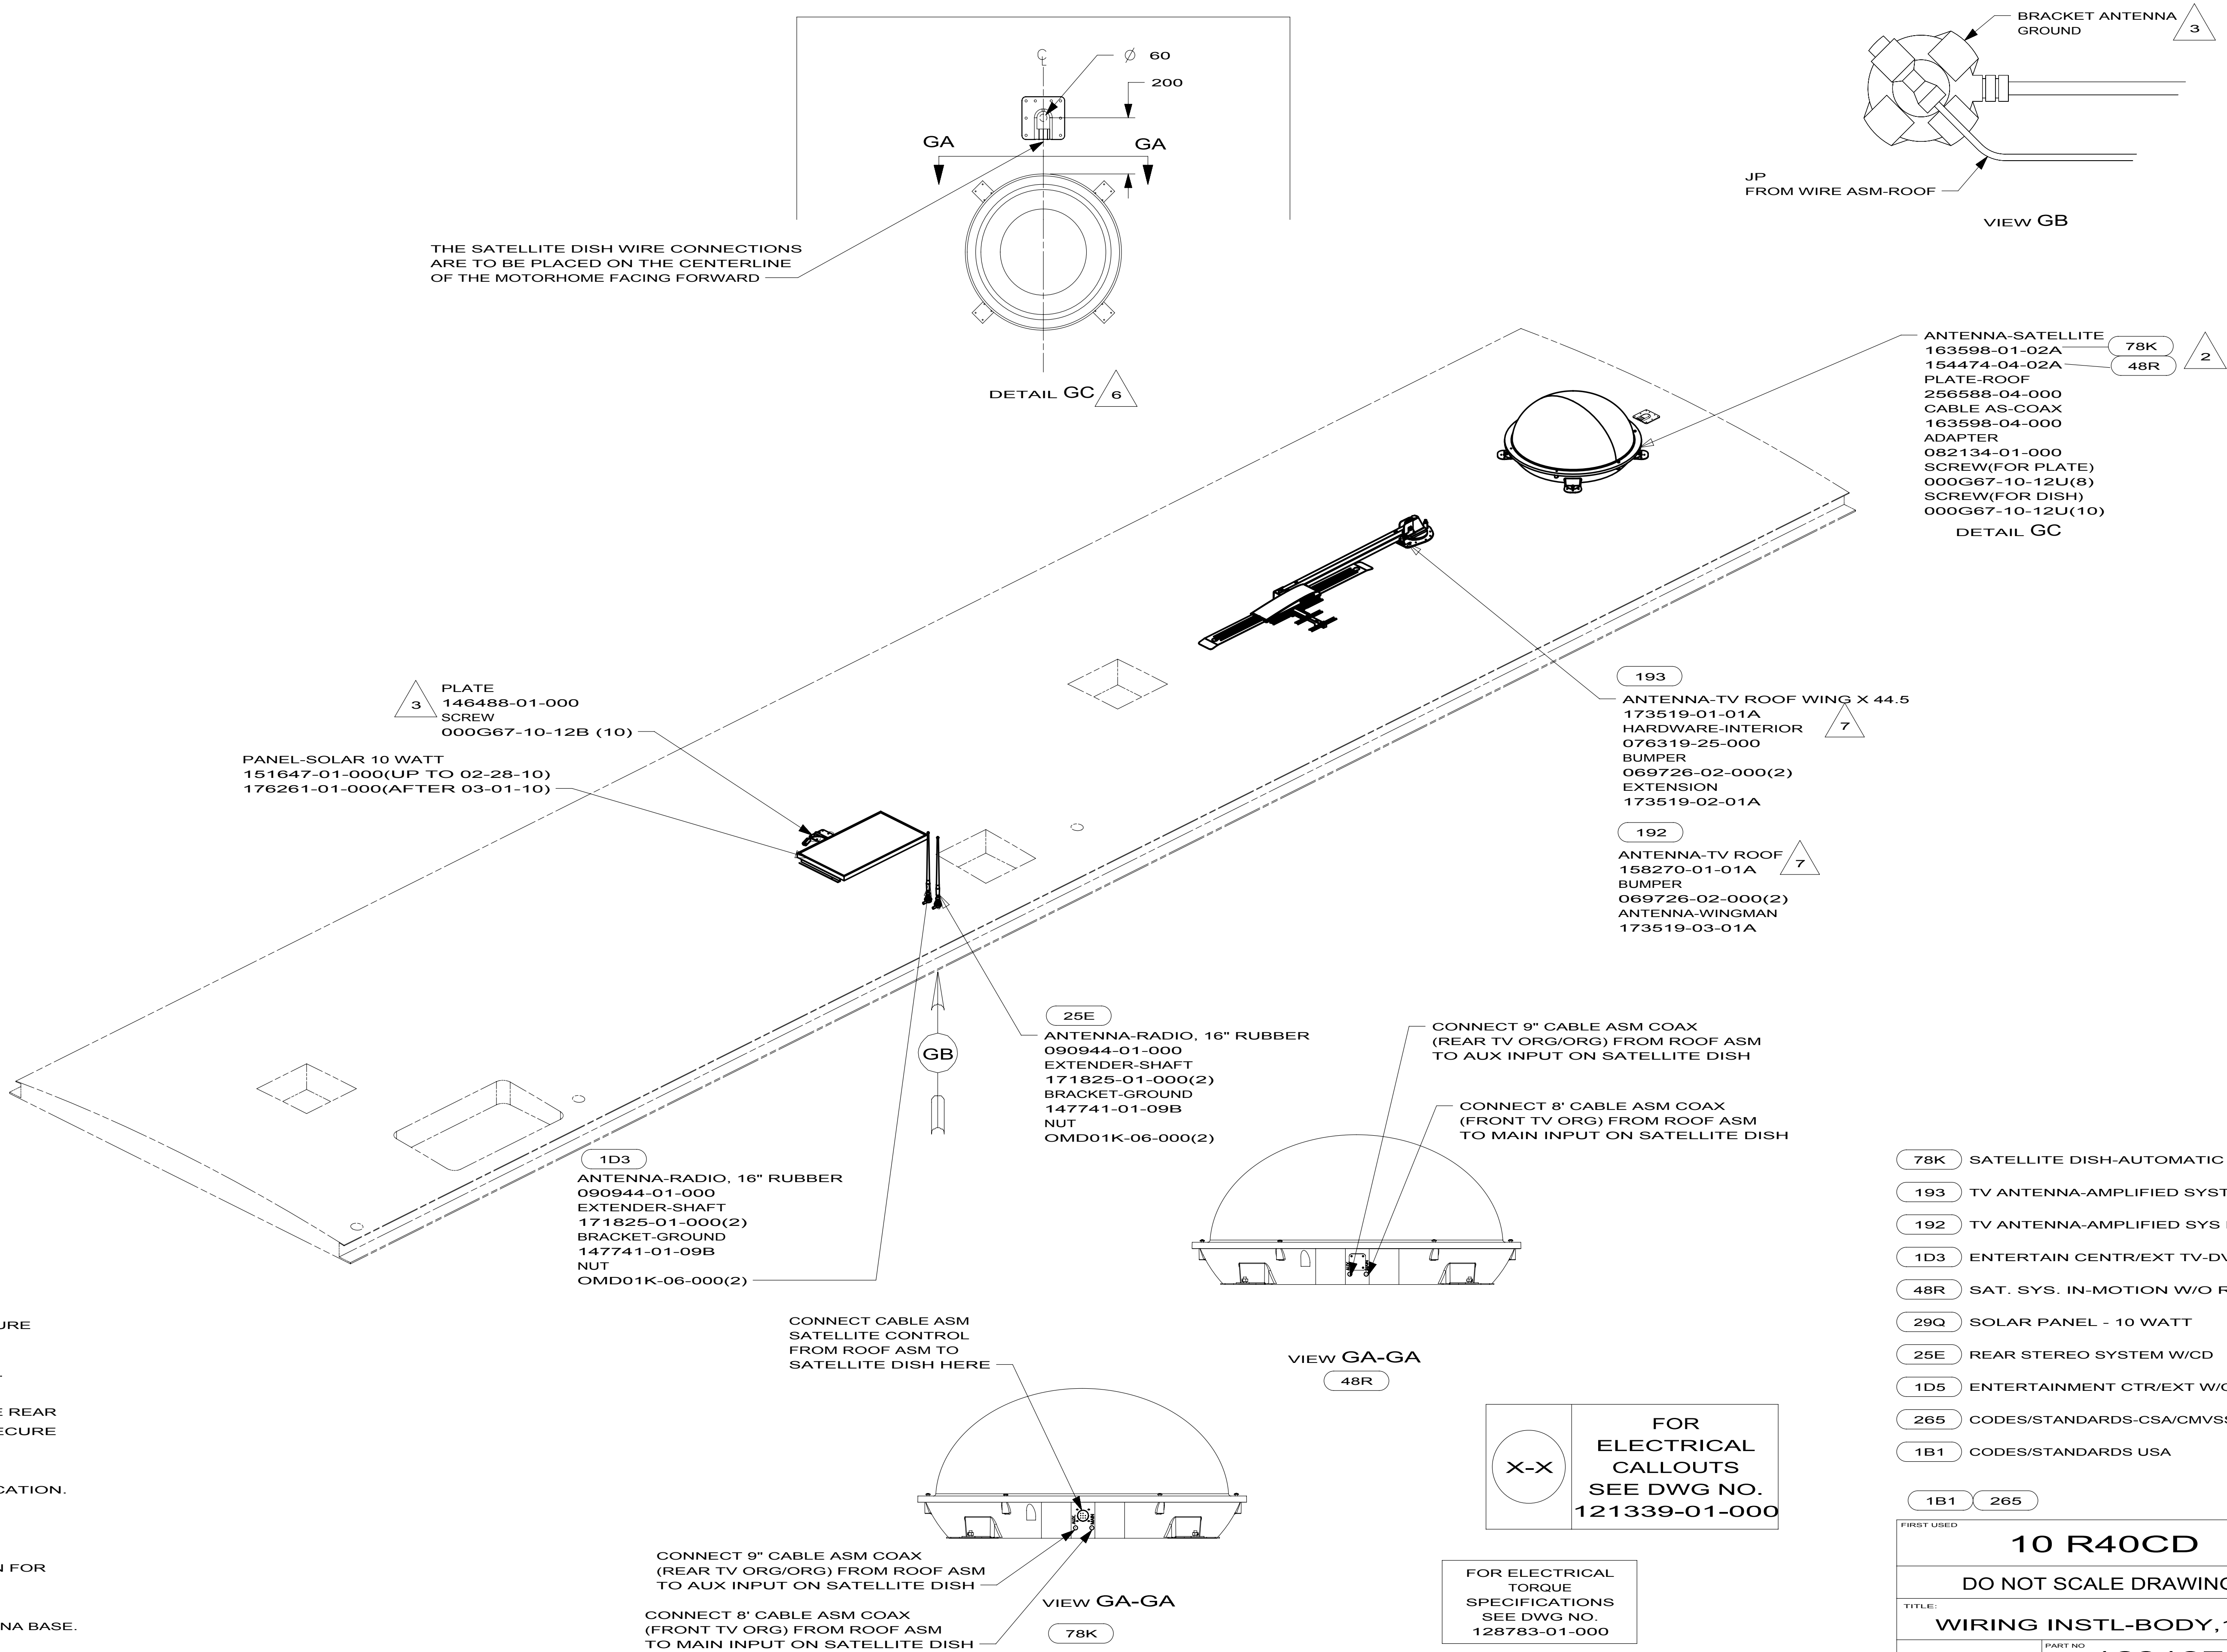

- NOTES:
- 1 WRAP BRACKET LEGS AROUND ANTENNA BASE.
 - 2 SEE MANUFACTURER'S INSTALLATION FOR ADDITIONAL INFORMATION.
 - 3 SEAL
 - 4 SEE DETAIL GD FOR SATELLITE LOCATION.
 - 5 MOUNT GPS ANTENNA AS FAR TO THE REAR OF THE SATELLITE AS POSSIBLE. SECURE CABLE WITH ROOF SEALANT.
 - 6 CUT AND REMOVE SHIPPING STRAPS.
 - 7 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE


FIRST USED		
10 R40CD		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-BODY, 12V		
SHEET 7	PART NO 169197	REV

D

C

B

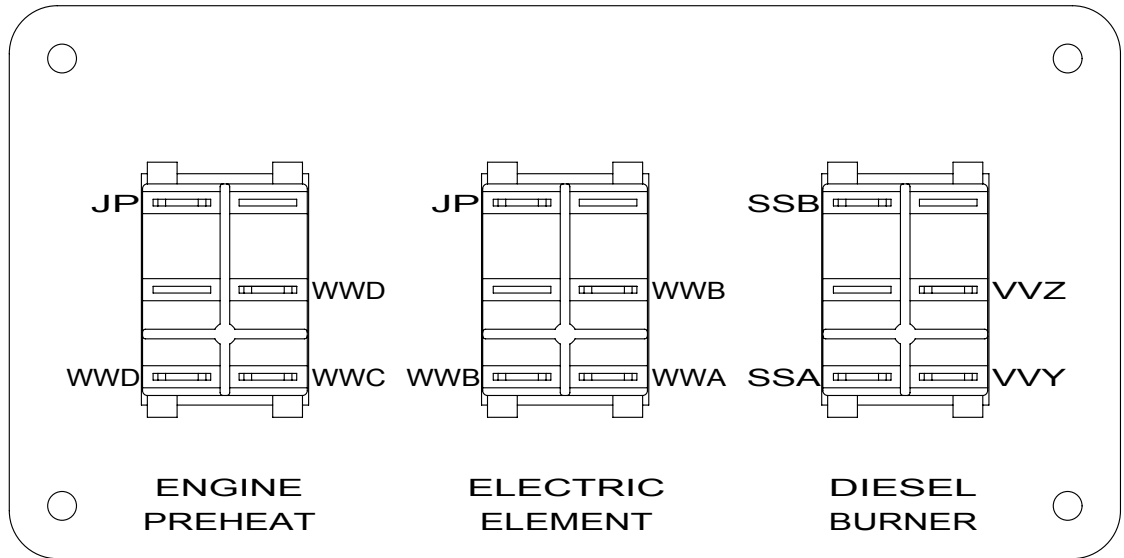A



DETAIL HB

SWITCH-SLIDEROOM
DETAIL EA

MONITOR-PANEL
133004-06-01A
SCREW
000G11-08-08U (4)

MONITOR-EMS
127002-10-000
SCREW
000G12-08-08U (2)

THERMOSTAT-A/C FURNACE
105620-21-000
GASKET-THERM
134588-09-000
DETAIL HC

1 REMOTE PANEL-INVERTER
172438-02-000
CABLE ASM-MODULAR JACK 50'
148254-03-000
CONDUIT
041953-09-000
(7000)

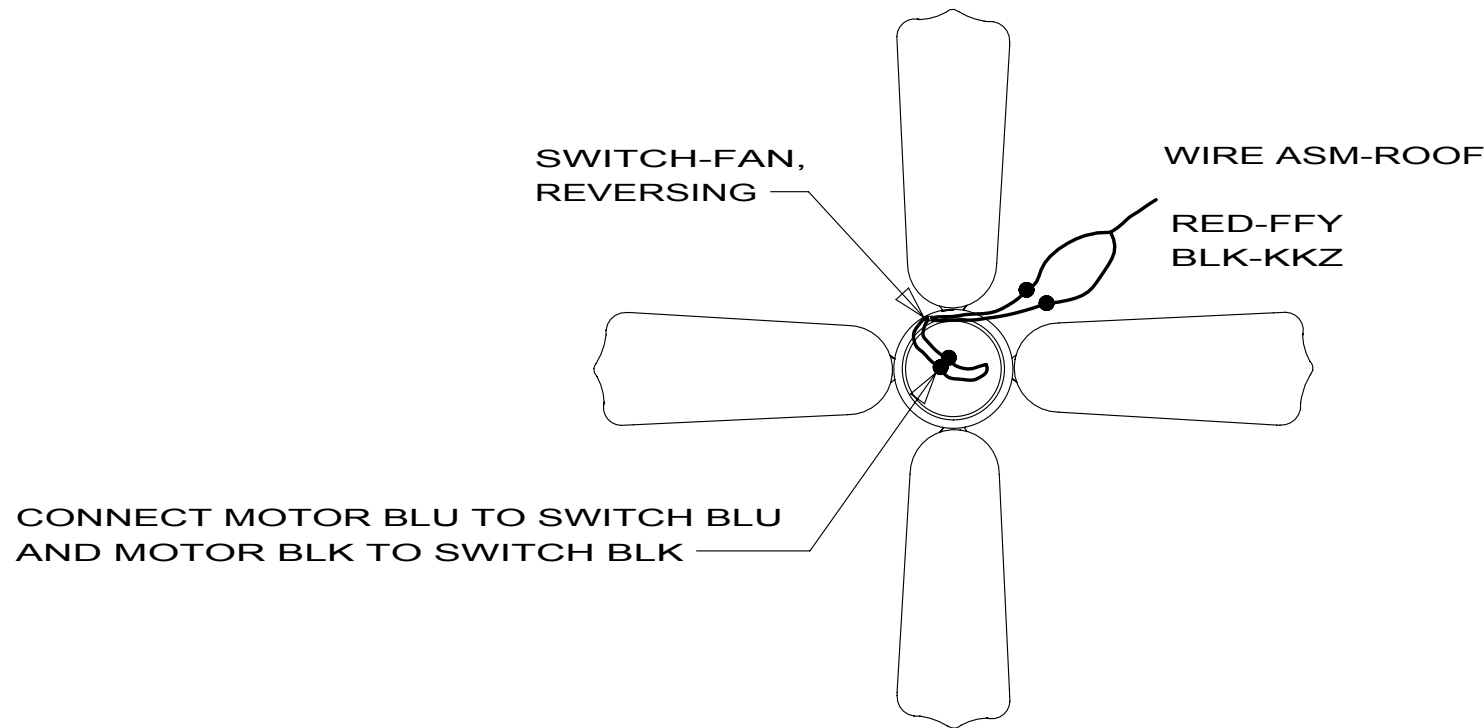
SWITCHES
DETAIL EP

SWITCH-ASM
169741-11-01A
DETAIL HB


AUTO GEN START
158425-01-000 3 32W

SWITCH
DETAIL ER

DETAIL HA



DETAIL HD

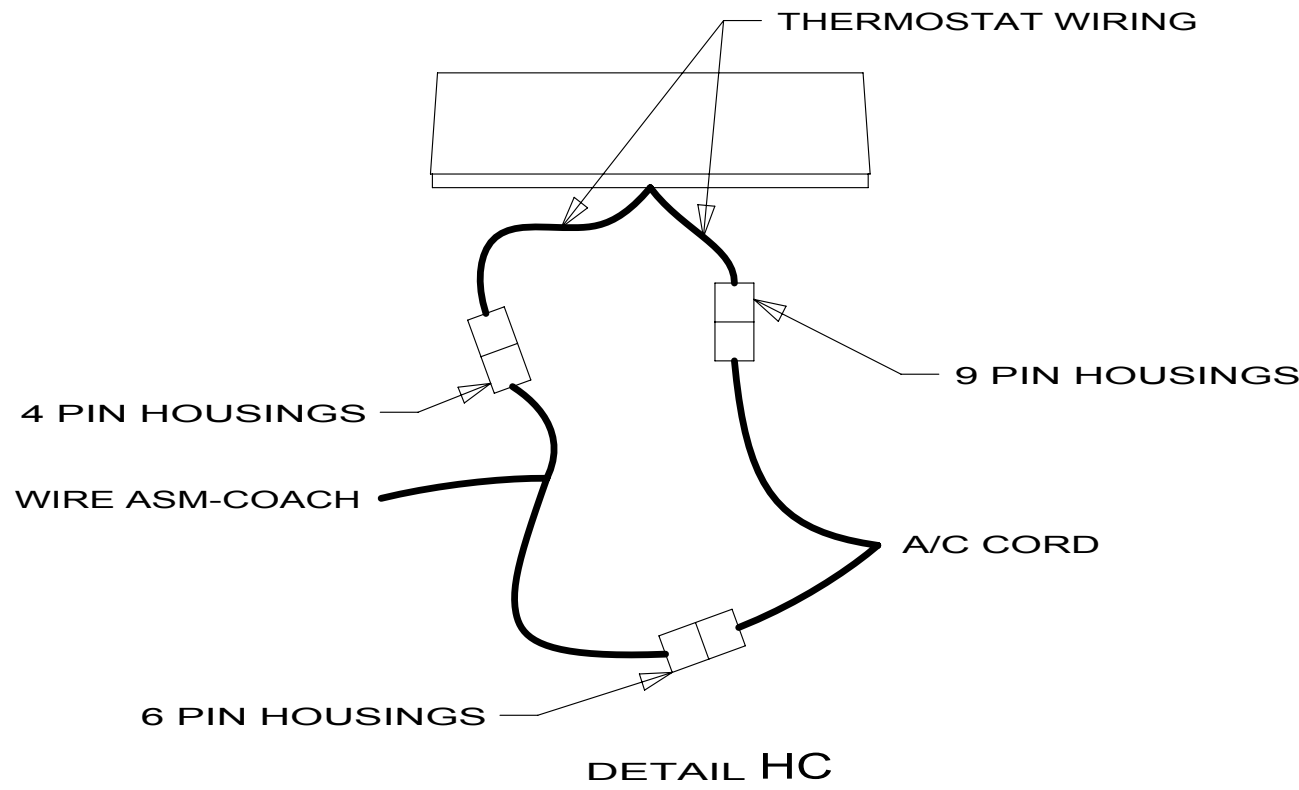

3 UPON FIRST POWER-UP, THE DISPLAY PANEL WILL PROMPT FOR "GEN TYPE". USE THE ARROW KEYS AND SCROLL TO "QD 6/8" AND PRESS ENTER. NEXT, IT WILL PROMPT FOR "SAFE TYPE". USE THE ARROW KEYS TO SCROLL TO "IGNITION" AND PRESS ENTER. SEE OWNER'S MANUAL FOR ADDITION INFORMATION.

2 INSTALL GASKET ON BACK SIDE OF ONE PLACE AFTER INSTALLATION OF THERMOSTAT, MAKING SURE THAT THE GASKET CAVERS AND SEALS THE HOLE THAT THE WIRES PASS THROUGH.

1 CONNECT CIRCUIT WB FROM COACH WIRING TO RED WIRE ON REMOTE PANEL.

NOTES:


FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

32W GENERATOR-START,AUTO SYSTEM
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 R40CD		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 8	PART NO. 169197	REV

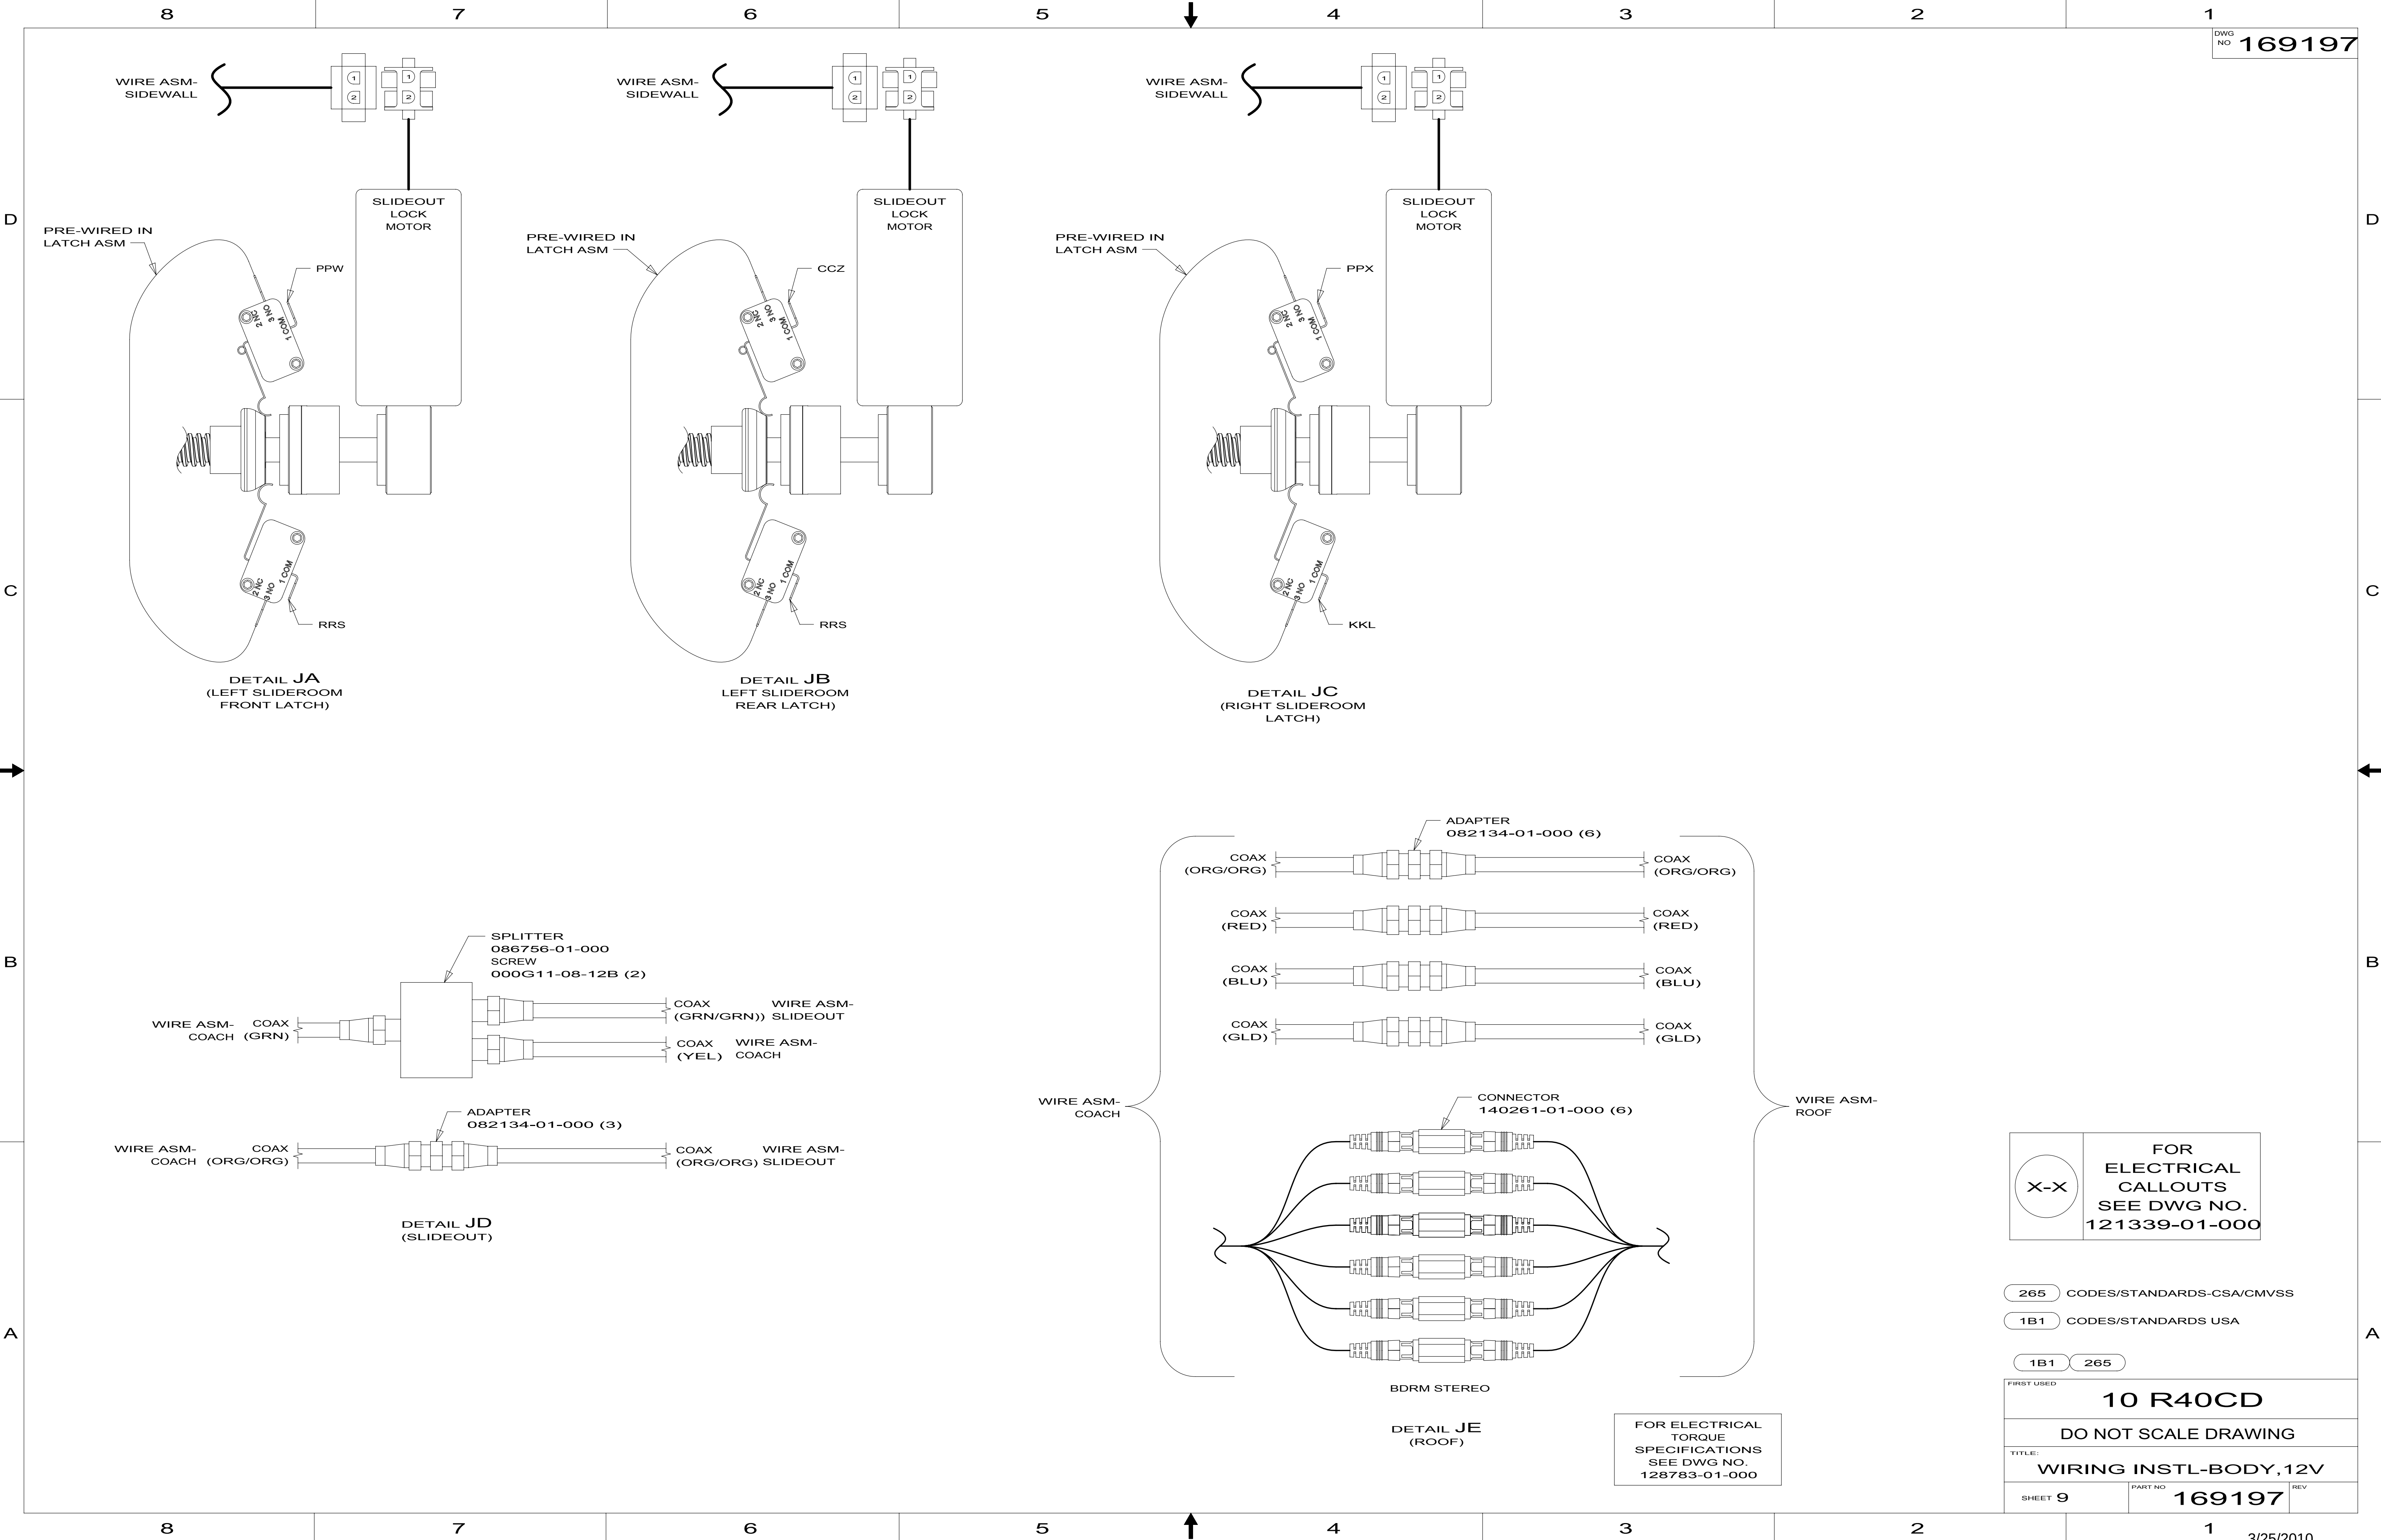


VENDOR NO.

KEY	PART NUMBER	U/M	DESCRIPTION
	087694-01-700	EA	BULB

087694-01-000
VENDOR NO.
GE561

KEY	PART NUMBER	U/M	DESCRIPTION	108354-01-01A	VENDOR NO.
	108354-01-700	EA	BULB-COURTESY LIGHT		395-B

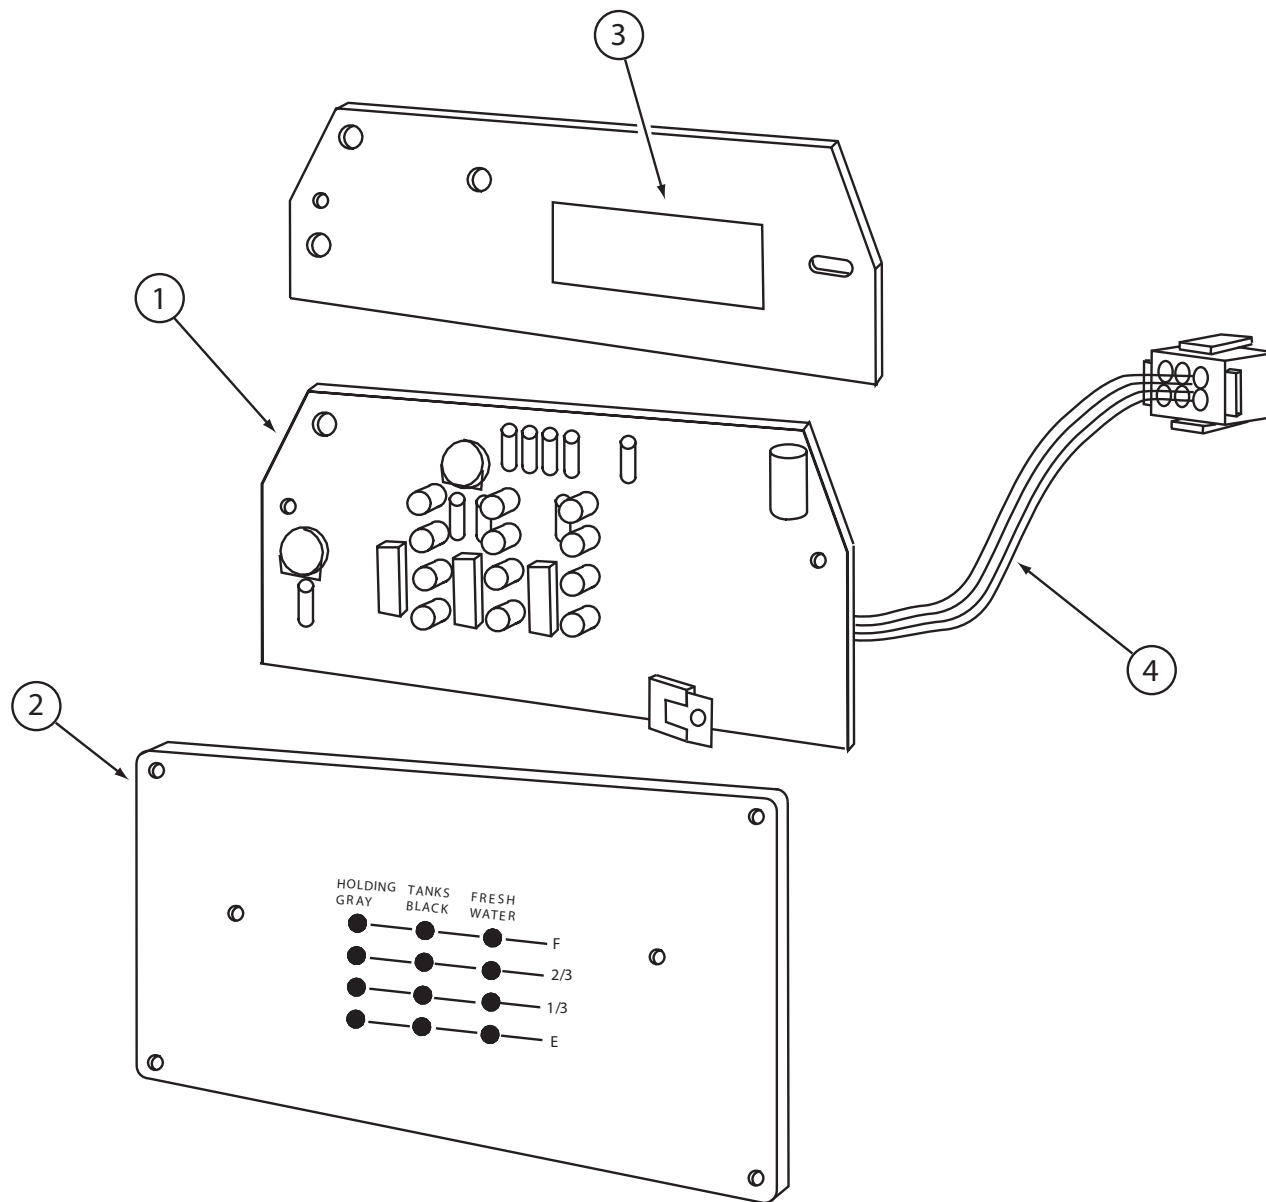

KEY PART NUMBER

1	129561-02-700	EA	PC BOARD - SENSOR SYSTEM/RED
2	129561-01-701	EA	CHASSIS SCREENED
4	129561-01-703	EA	HARNESS

129561-02-01A

VENDOR NO.

L5132-02
C00399
L7694-00

KEY	PART NUMBER	U/M	DESCRIPTION
1	133004-01-702	EA	SWITCH/DPDT MOM=ON-OFF-ON
2	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)
3	133004-01-706	EA	L.E.D. GREEN-PANEL MOUNT
4	133004-01-704	EA	METER/VOLT-DIGITAL - LCD
5	133004-01-705	EA	SWITCH/MOM ON - PUSH BUTTON
6	133004-01-703	EA	L.E.D. RED-PANEL MOUNT
7	133004-01-701	EA	SWITCH/DPDT ON-ON/MAINTAINED
8	133004-02-701	EA	SCREENED - CHASSIS
	133004-02-700	EA	BOARD - PC

133004-02-01A
VENDOR NO.
 L1011-00
 L0775-00
 L0785
 L1008-00
 L0950-00
 L1009-00
 L1025-00
 CC0547-00
 L5113-03


KEY	PART NUMBER	U/M	DESCRIPTION
1	133004-01-702	EA	SWITCH/DPDT MOM=ON-OFF-ON
2	100258-10-701	EA	GAUGE-HOUR MTR-CLIP ON (LCD)
3	133004-01-706	EA	L.E.D. GREEN-PANEL MOUNT
4	133004-01-704	EA	METER/VOLT-DIGITAL - LCD
5	133004-01-705	EA	SWITCH/MOM ON - PUSH BUTTON
7	133004-01-701	EA	SWITCH/DPDT ON-ON/MAINTAINED
8	133004-04-700	EA	SCREENED CHASSIS/SUB ASSY
	133004-02-700	EA	BOARD - PC

CONTACT WINNEBAGO PARTS SALES FOR MISSING COMPONENTS

133004-04-01A
VENDOR NO.
 L1011-00
 L0775-00
 L0785
 L1008-00
 L0950-00
 L1025-00
 CE0287
 L5113-03

KEY	PART NUMBER	U/M	DESCRIPTION
1	133004-01-702	EA	SWITCH/DPDT MOM=ON-OFF-ON
2	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)
3	133004-01-706	EA	L.E.D. GREEN-PANEL MOUNT
4	133004-01-704	EA	METER/VOLT-DIGITAL - LCD
5	133004-01-705	EA	SWITCH/MOM ON - PUSH BUTTON
6	130004-01-703	EA	L.E.D. RED-PANEL MOUNT
7	133004-01-701	EA	SWITCH/DPDT ON-ON/MAINTAINED
8	133004-05-700	EA	SCREENED CHASSIS
	133004-05-701	EA	BOARD - PC

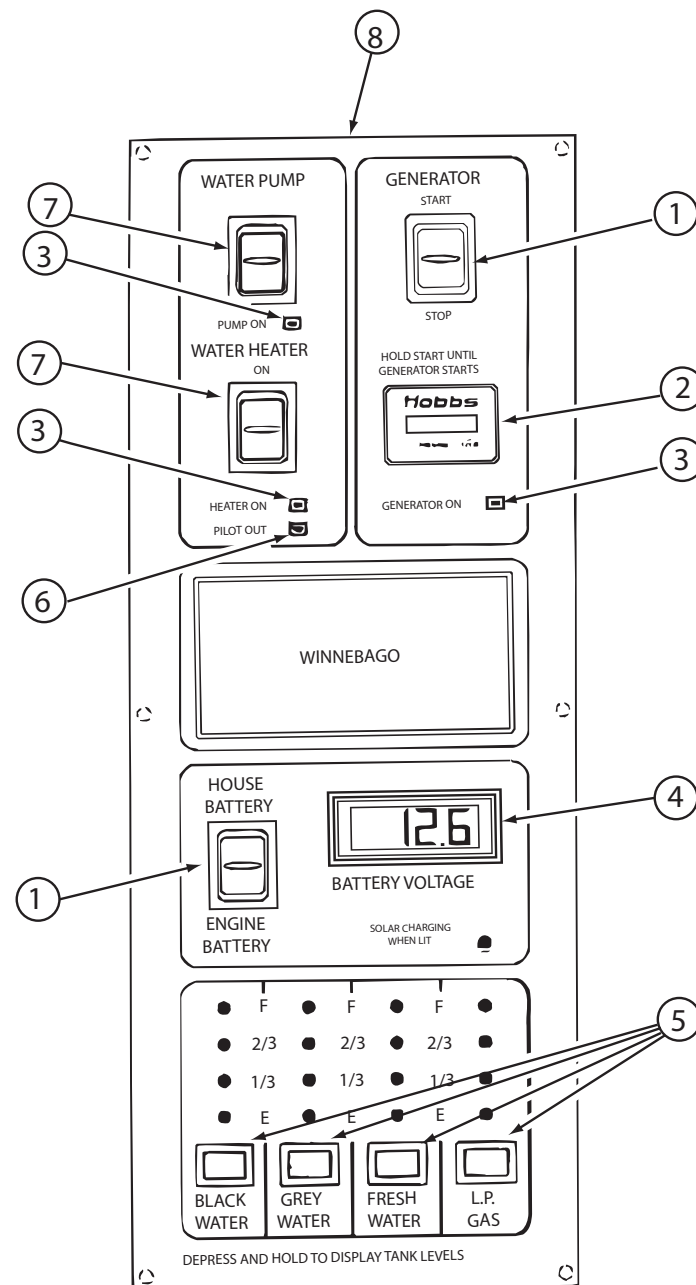133004-05-01A
VENDOR NO.
 L1011-00
 L0775-00
 L0785
 L1008-00
 L0950-00
 L1009-00
 L1025-00
 CC0563-00
 L5130-02



139134-01-03A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	139134-01-708	EA DISC - F/BLADE HOLDER - NICKEL	A70050-3N
	139134-01-709	EA BALANCING KIT - CLIP/PLATES	70050-21
	139134-01-710	EA NOISE KIT - WASHERS	NOISE KIT
	139134-01-711	EA BLADES (36") WHITE MATT	A70050-5W
	139134-01-712	EA MOTOR	A70050-1
	139134-01-718	EA HOLDER/BLADE(4 PC SET)NICKEL	70050-4N NICKEL
	139134-01-719	EA HOUSING/MOTOR - NICKEL	70052-2N NICKEL

KEY	PART NUMBER	U/M DESCRIPTION	146048-01-01A VENDOR NO.
	123775-01-700	EA BULB - 10 WATT - HALOGEN	71-JC10


154474-04-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	154474-04-703	EA BOARD RF ASSEMBLY N/C	100087
	154474-04-705	EA CABLE OUT DUAL TOP PCBA N/C	20034-1
	154474-04-706	EA LNB DUAL EAGLE ASPEN N/C	1863-1

154474-04-02A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	154474-04-702	EA DOME ONLY-REPLACEMENT-BLACK	1850-B-LP-FS
	154474-04-703	EA BOARD RF ASSEMBLY N/C	100087
	154474-04-705	EA CABLE OUT DUAL TOP PCBA N/C	20034-1
	154474-04-706	EA LNB DUAL EAGLE ASPEN N/C	1863-1

163598-01-01A			
KEY	PART NUMBER	U/M	DESCRIPTION
	154474-04-706	EA	LNB DUAL EAGLE ASPEN N/C
	163598-01-700	EA	BOARD CIRCUIT N/C
	163598-01-701	EA	STUFFED PCB,CWIM DVB N/C
VENDOR NO.			
			1863-1
			1990-RF-LP KIT
			438

163598-01-02A			
KEY	PART NUMBER	U/M	DESCRIPTION
	154474-04-702	EA	DOME ONLY-REPLACEMENT-BLACK
	154474-04-706	EA	LNB DUAL EAGLE ASPEN N/C
	163598-01-700	EA	BOARD CIRCUIT N/C
	163598-01-701	EA	STUFFED PCB,CWIM DVB N/C
VENDOR NO.			
			1850-B-LP-FS
			1863-1
			1990-RF-LP KIT
			438

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	165170-01-700	EA	LENS	81230-LENS

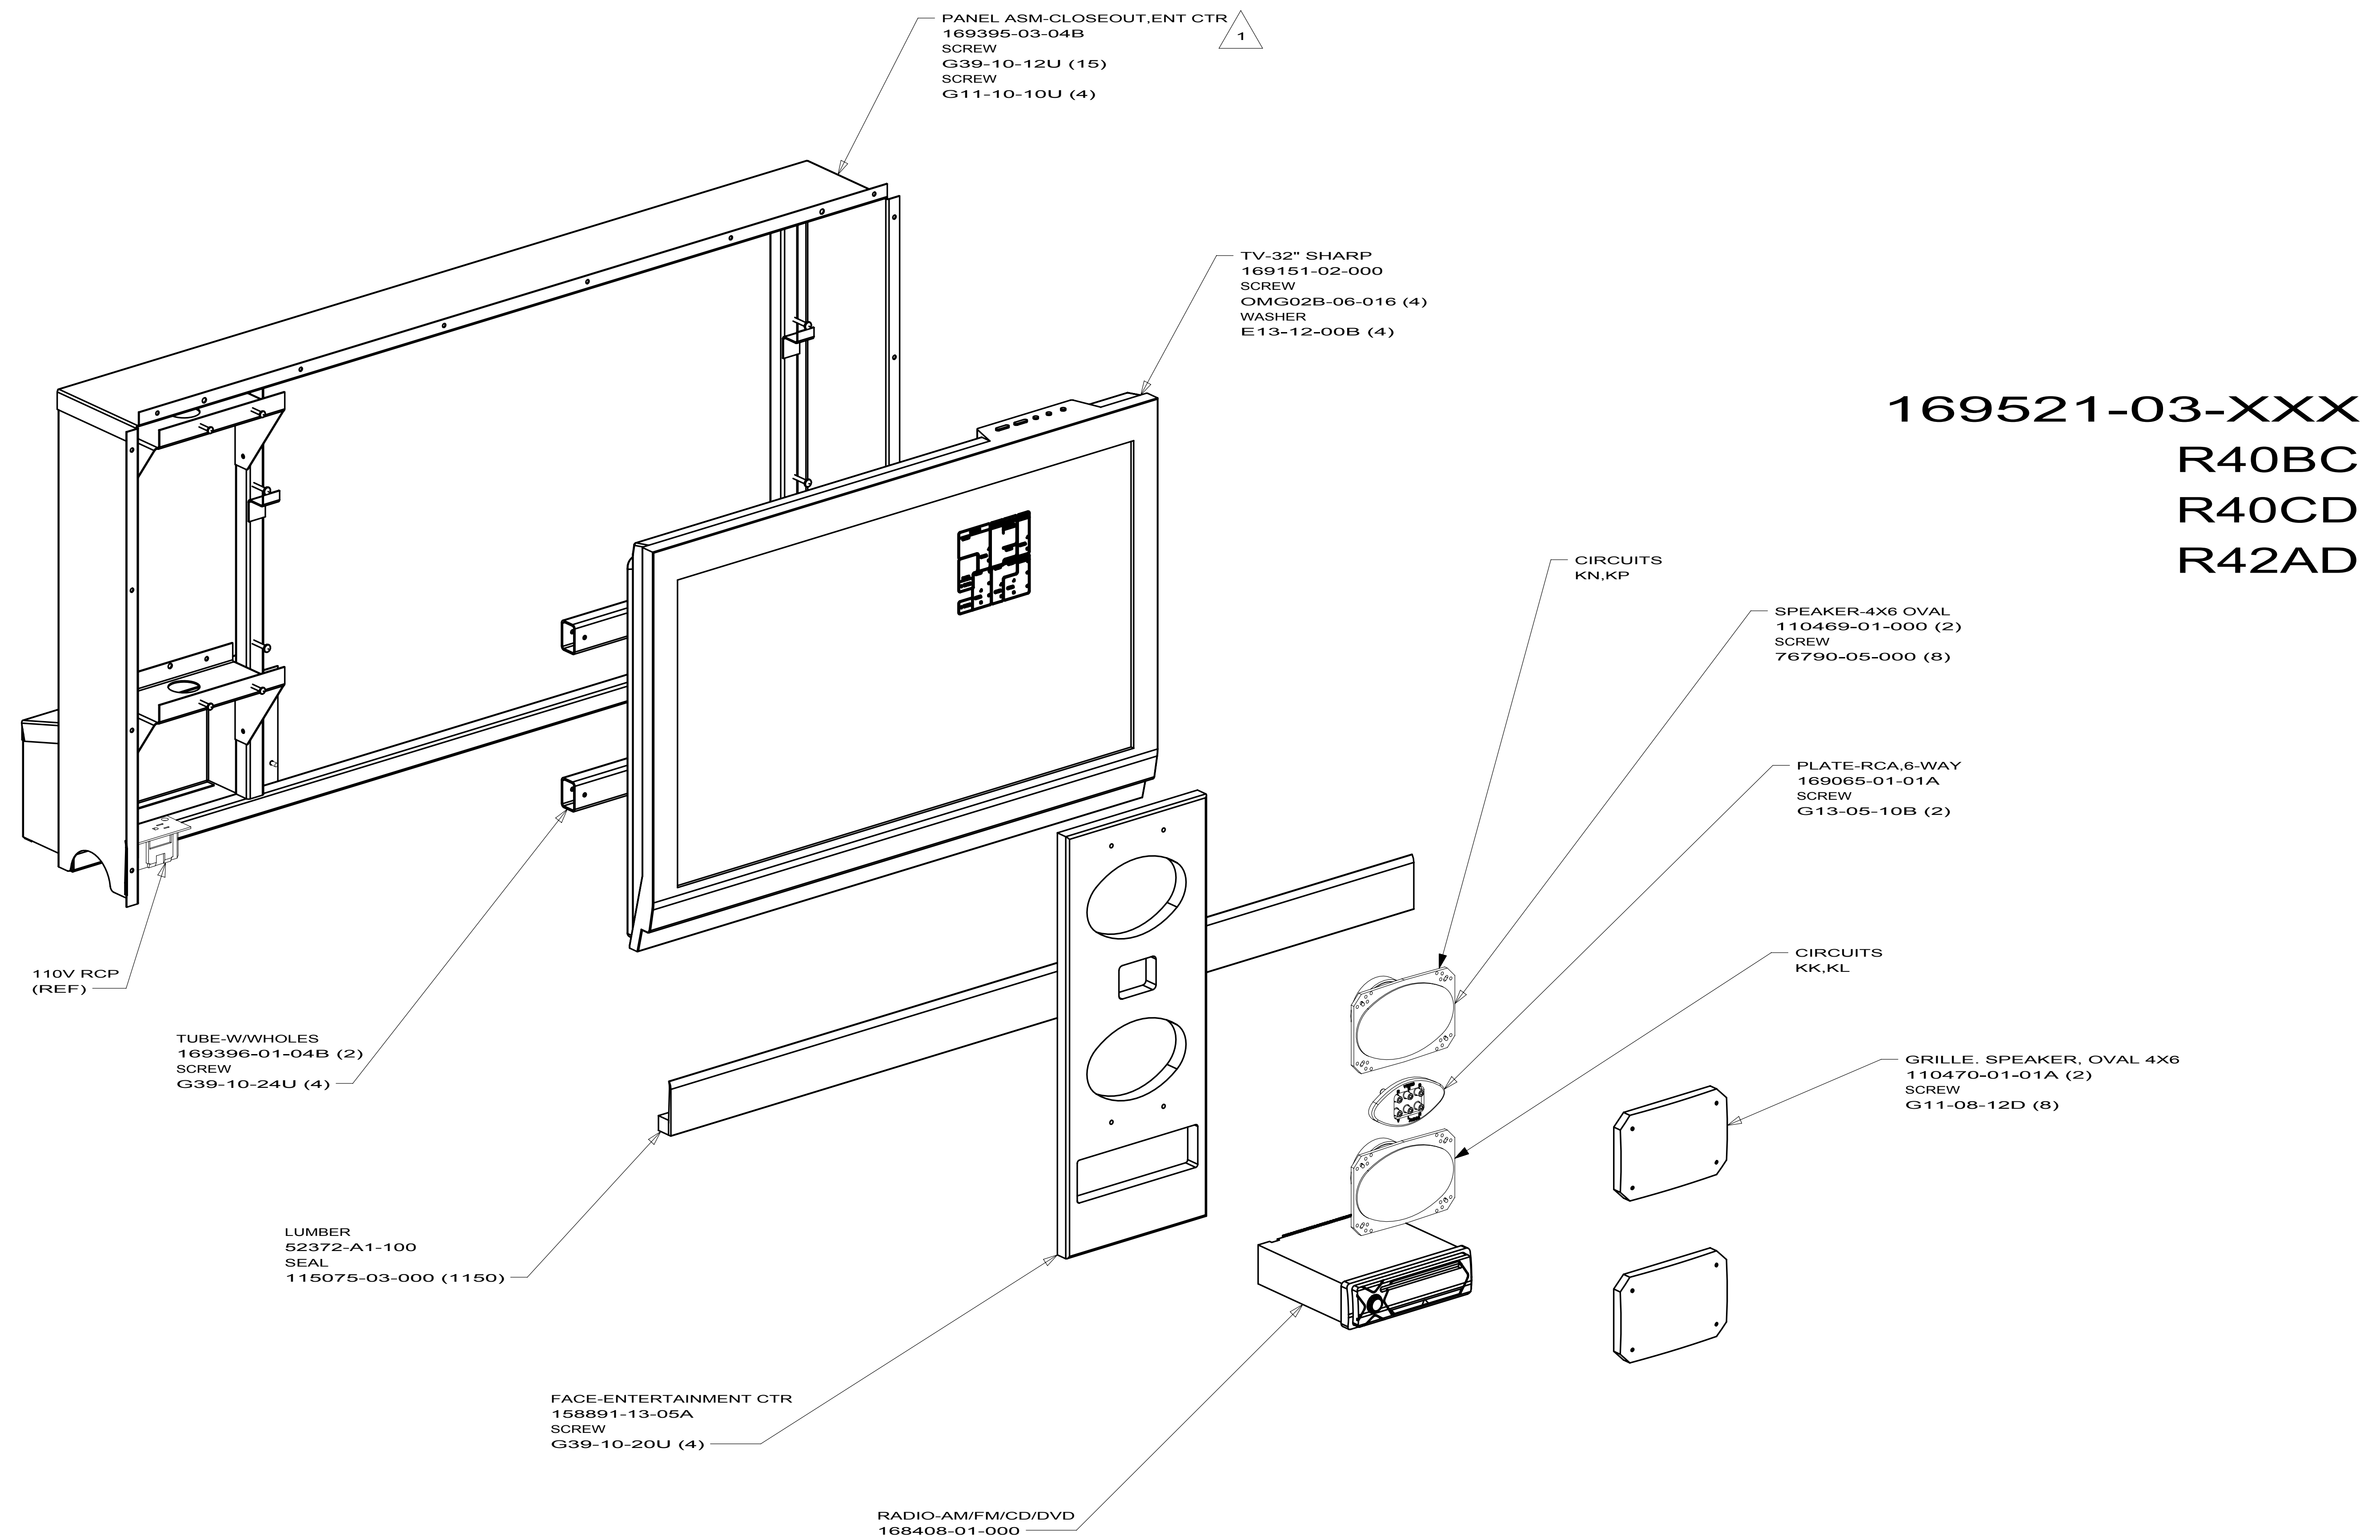

169521-03-XXX
R40BC
R40CD
R42AD


1 INSTALL ON LINE IF IN SIDEWALL, INSTALL IN 803 IF IN SLIDEOUT.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000	X-X	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
--	-----	--

169521

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	169536-01-700	EA	REMOTE - SERVICE PACK	PSVCAWM970

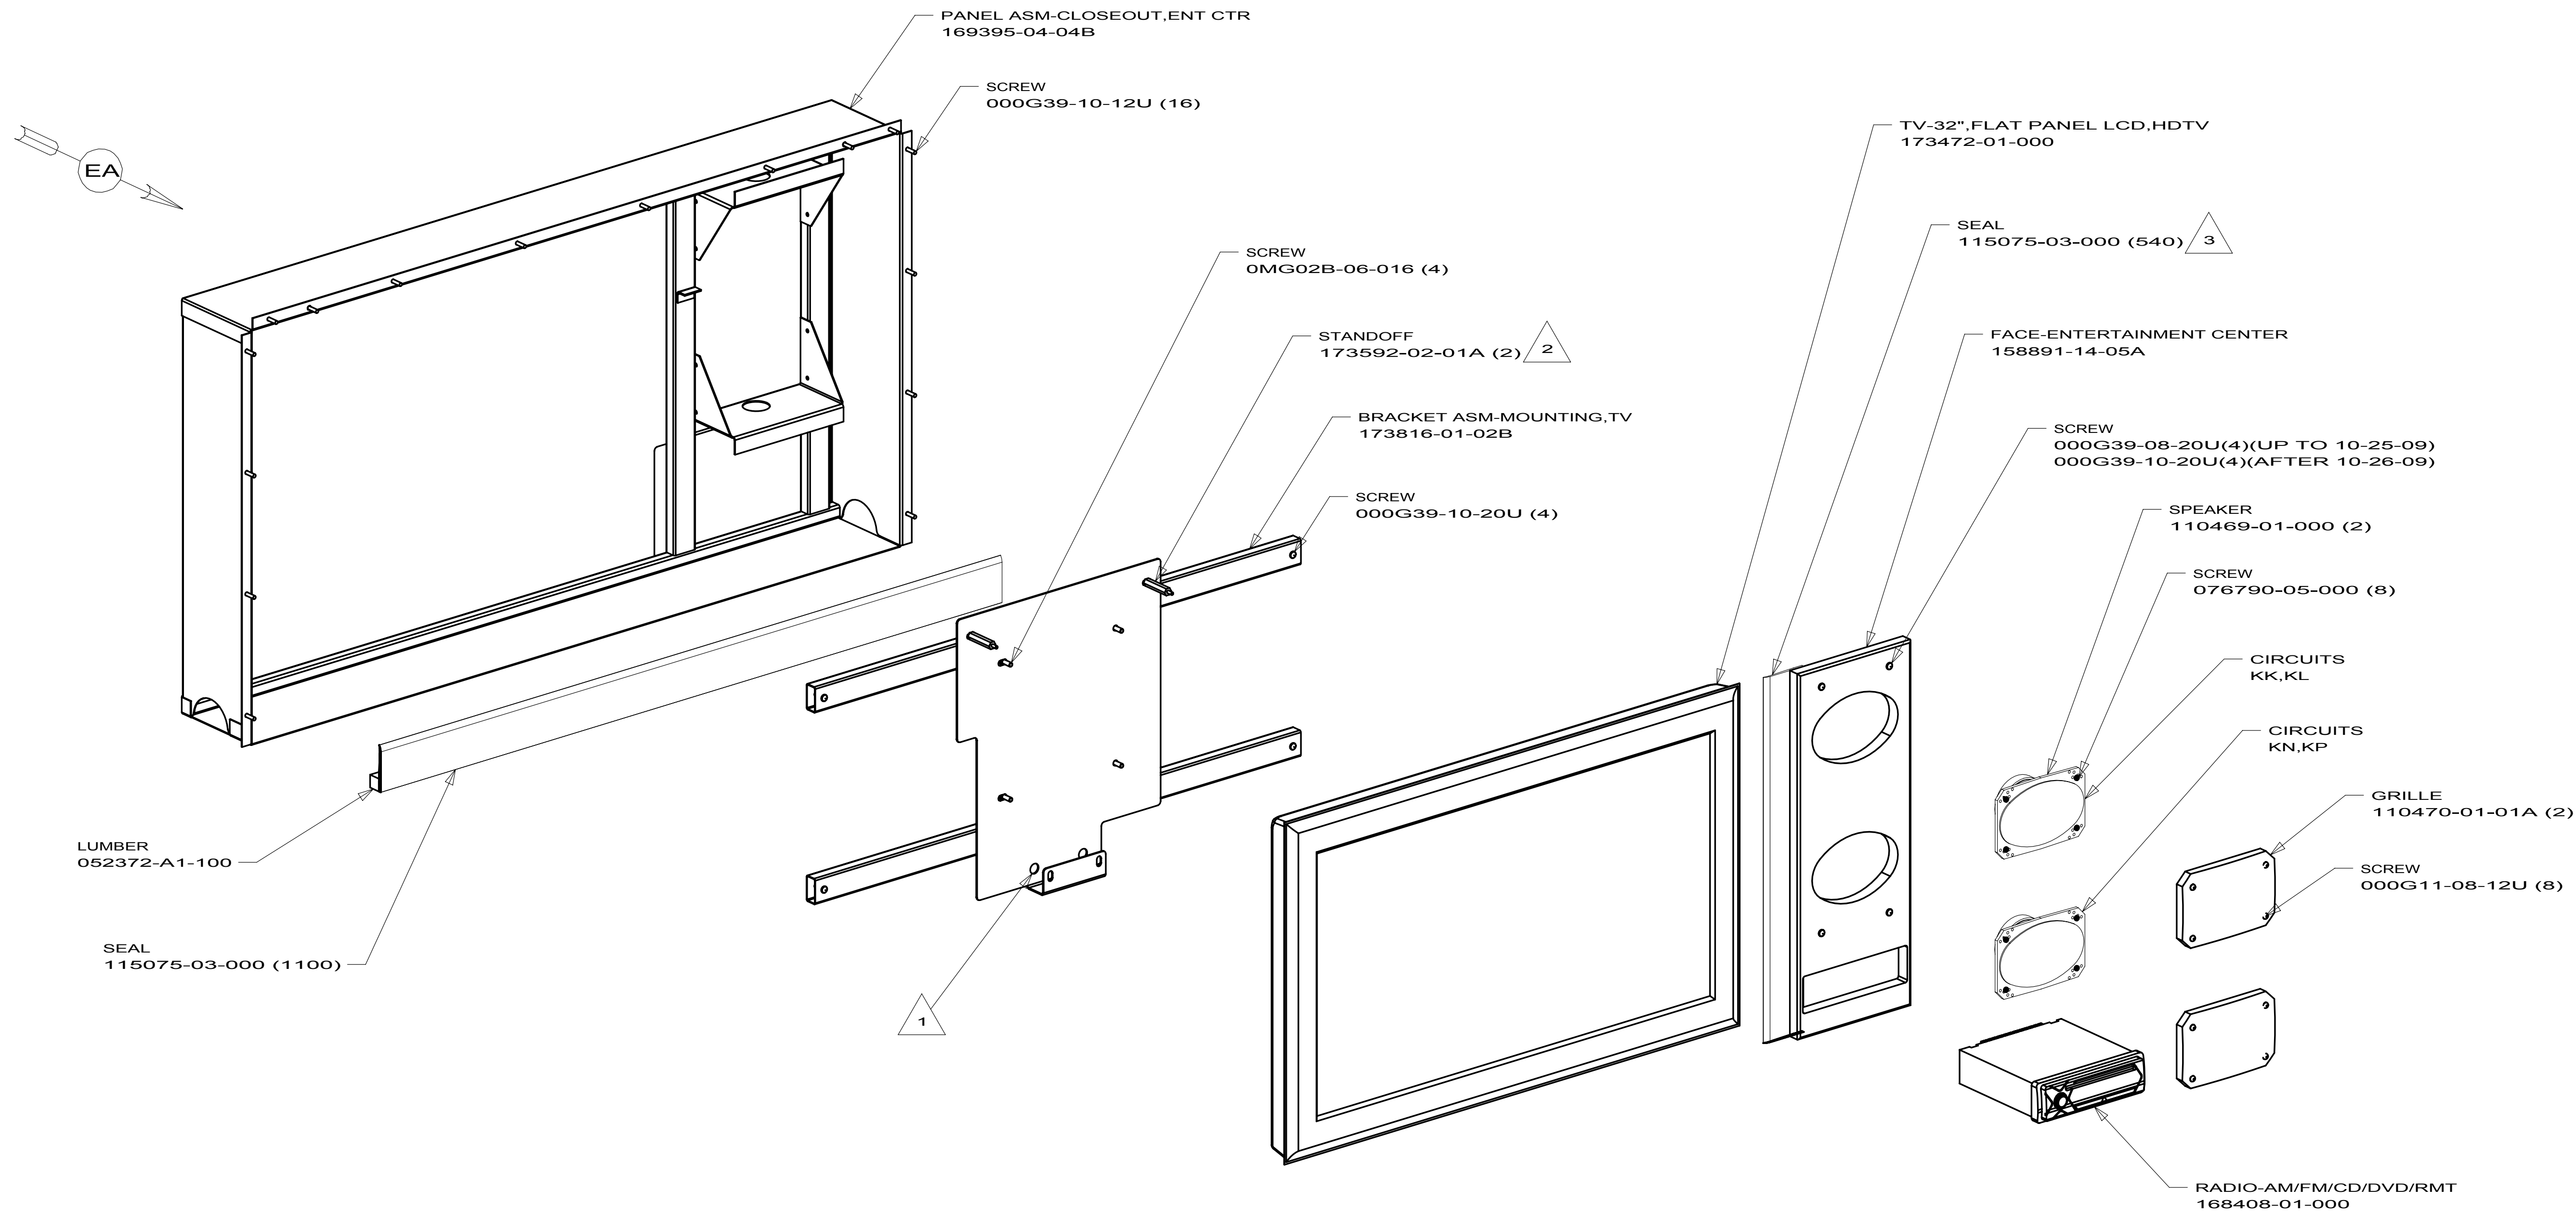

173821-02
P40T(UP TO 03-28-10)
R40CD(UP TO 03-28-10)
R40WD(UP TO 03-28-10)
R42AD(UP TO 03-28-10)


- 3 FASTEN TO BACK OF FACE-ENTERTAINMENT CENTER.
- 2 FASTEN WITH HARDWARE FROM TV CASE.
- 1 FASTEN WITH HARDWARE FROM TV STAND.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X
FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ENTERTAINMENT CTR COMPL-TV		
SHEET 2	PART NO 173821	REV

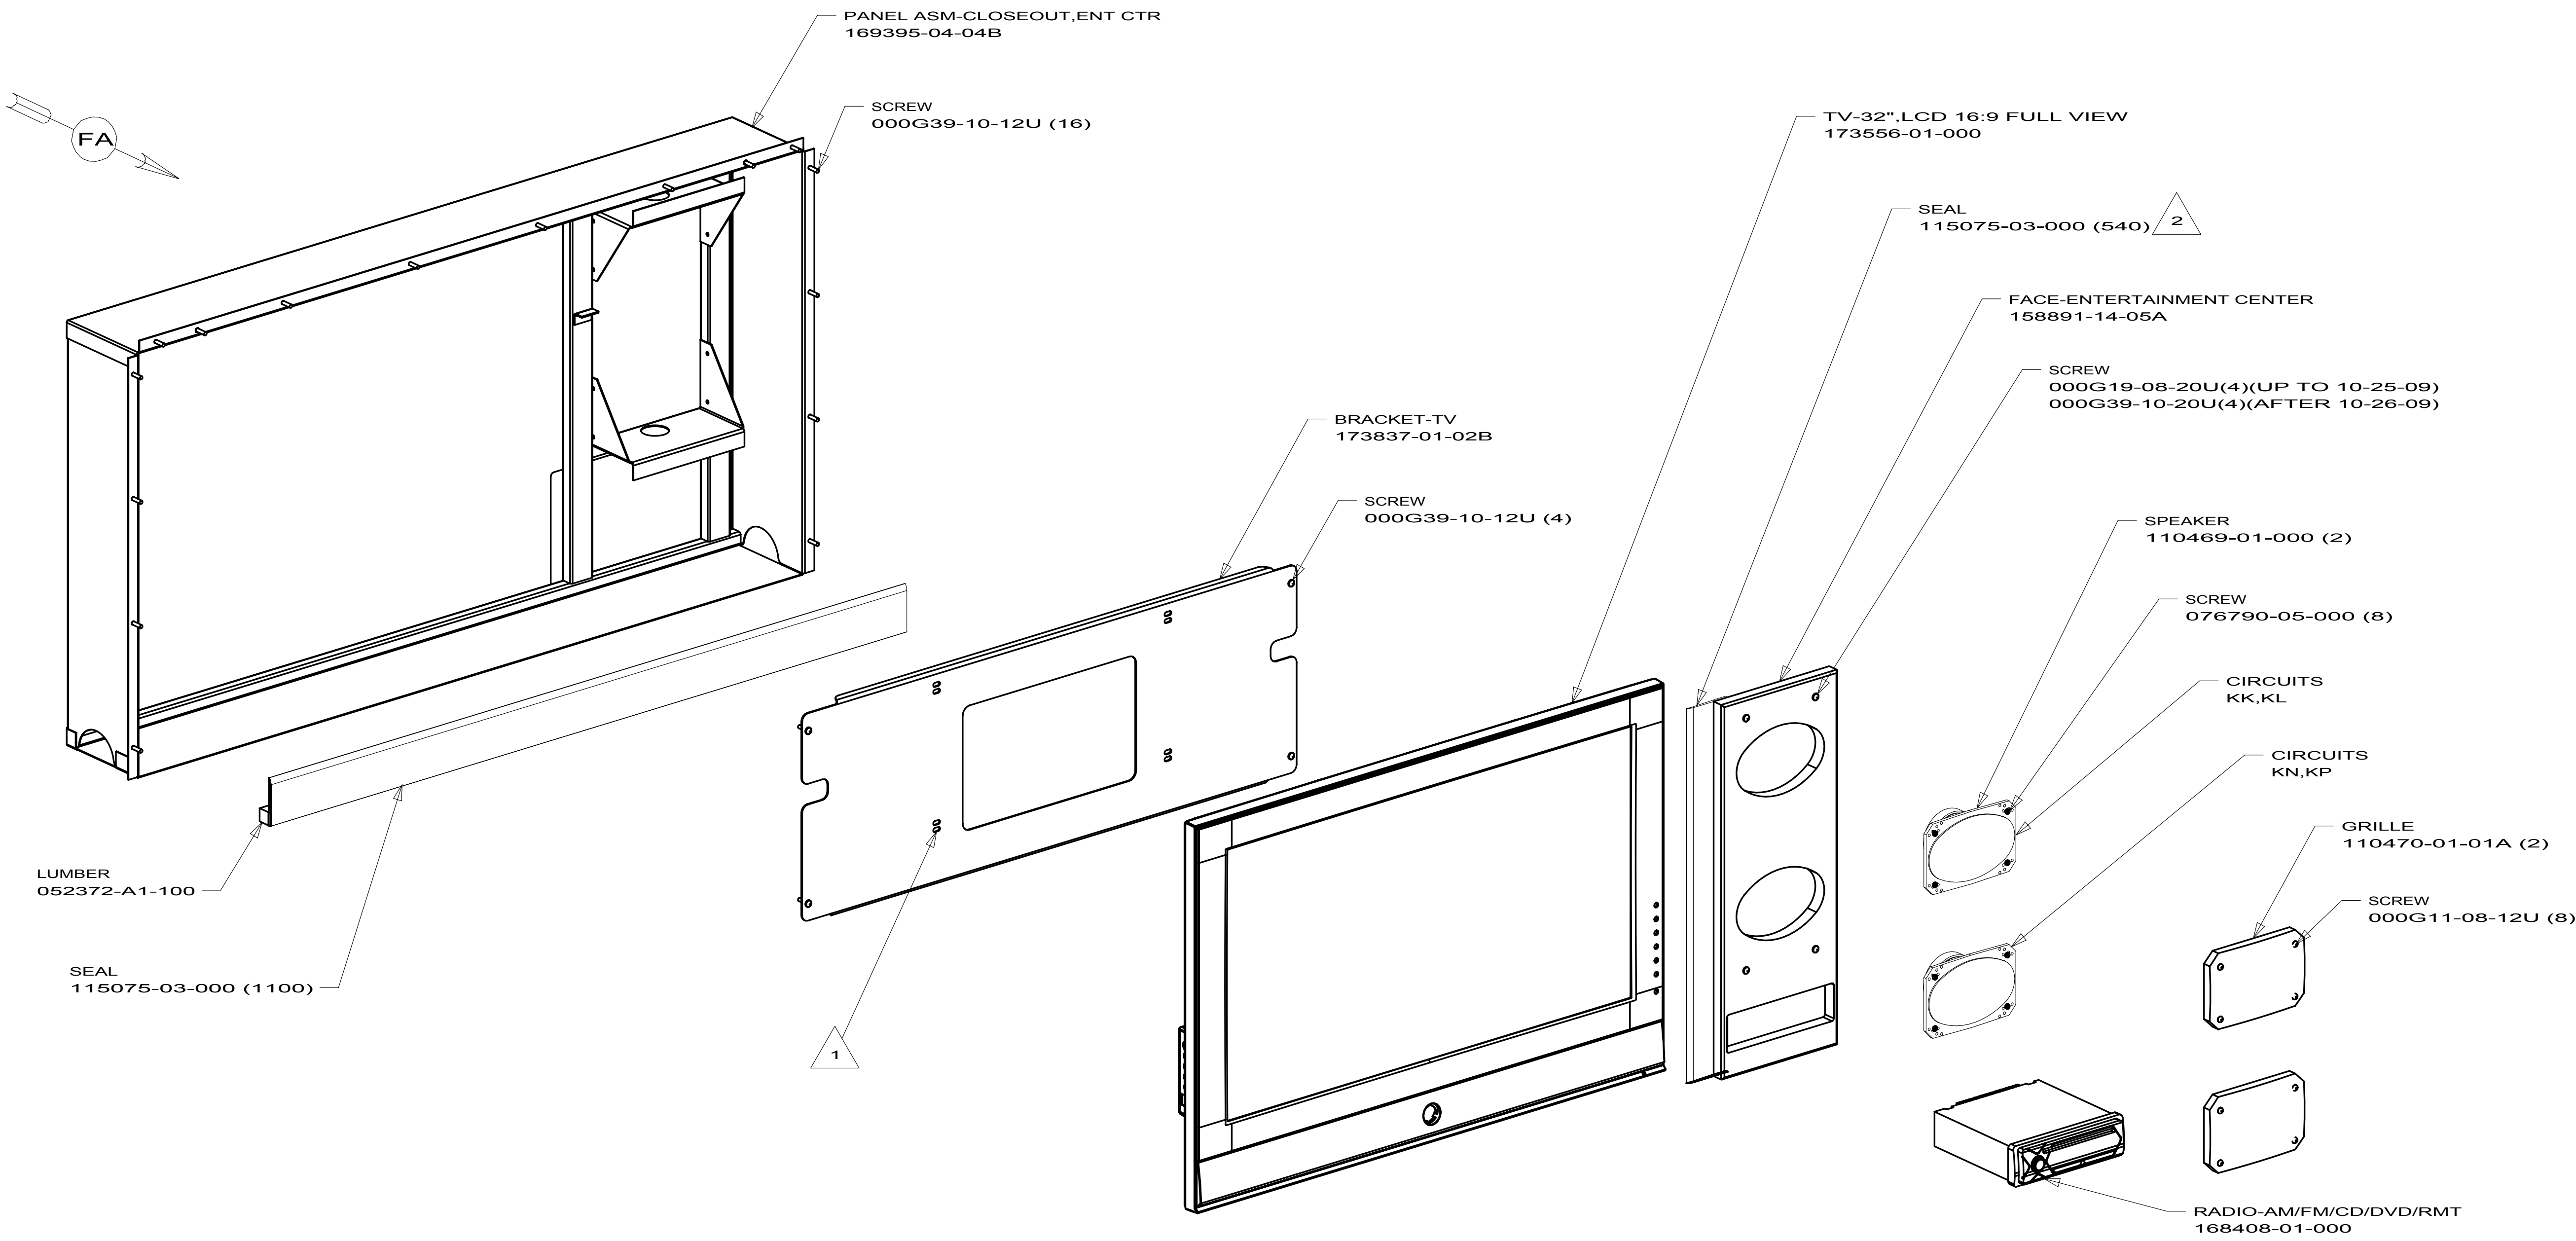

073821-04
J37F
R40CD(AFTER 03-29-10)
R40WD(AFTER 03-29-10)
R42AD(AFTER 03-29-10)
P40T(AFTER 03-29-10)

- 2 FASTEN TO BACK OF FACE-ENTERTAINMENT CENTER.
- 1 SCREWS SUPPLIED WITH TV. USE LOWER SET OF HOLES.





NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X
FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ENTERTAINMENT CTR COMPL-TV		
SHEET 4	PART NO 173821	REV

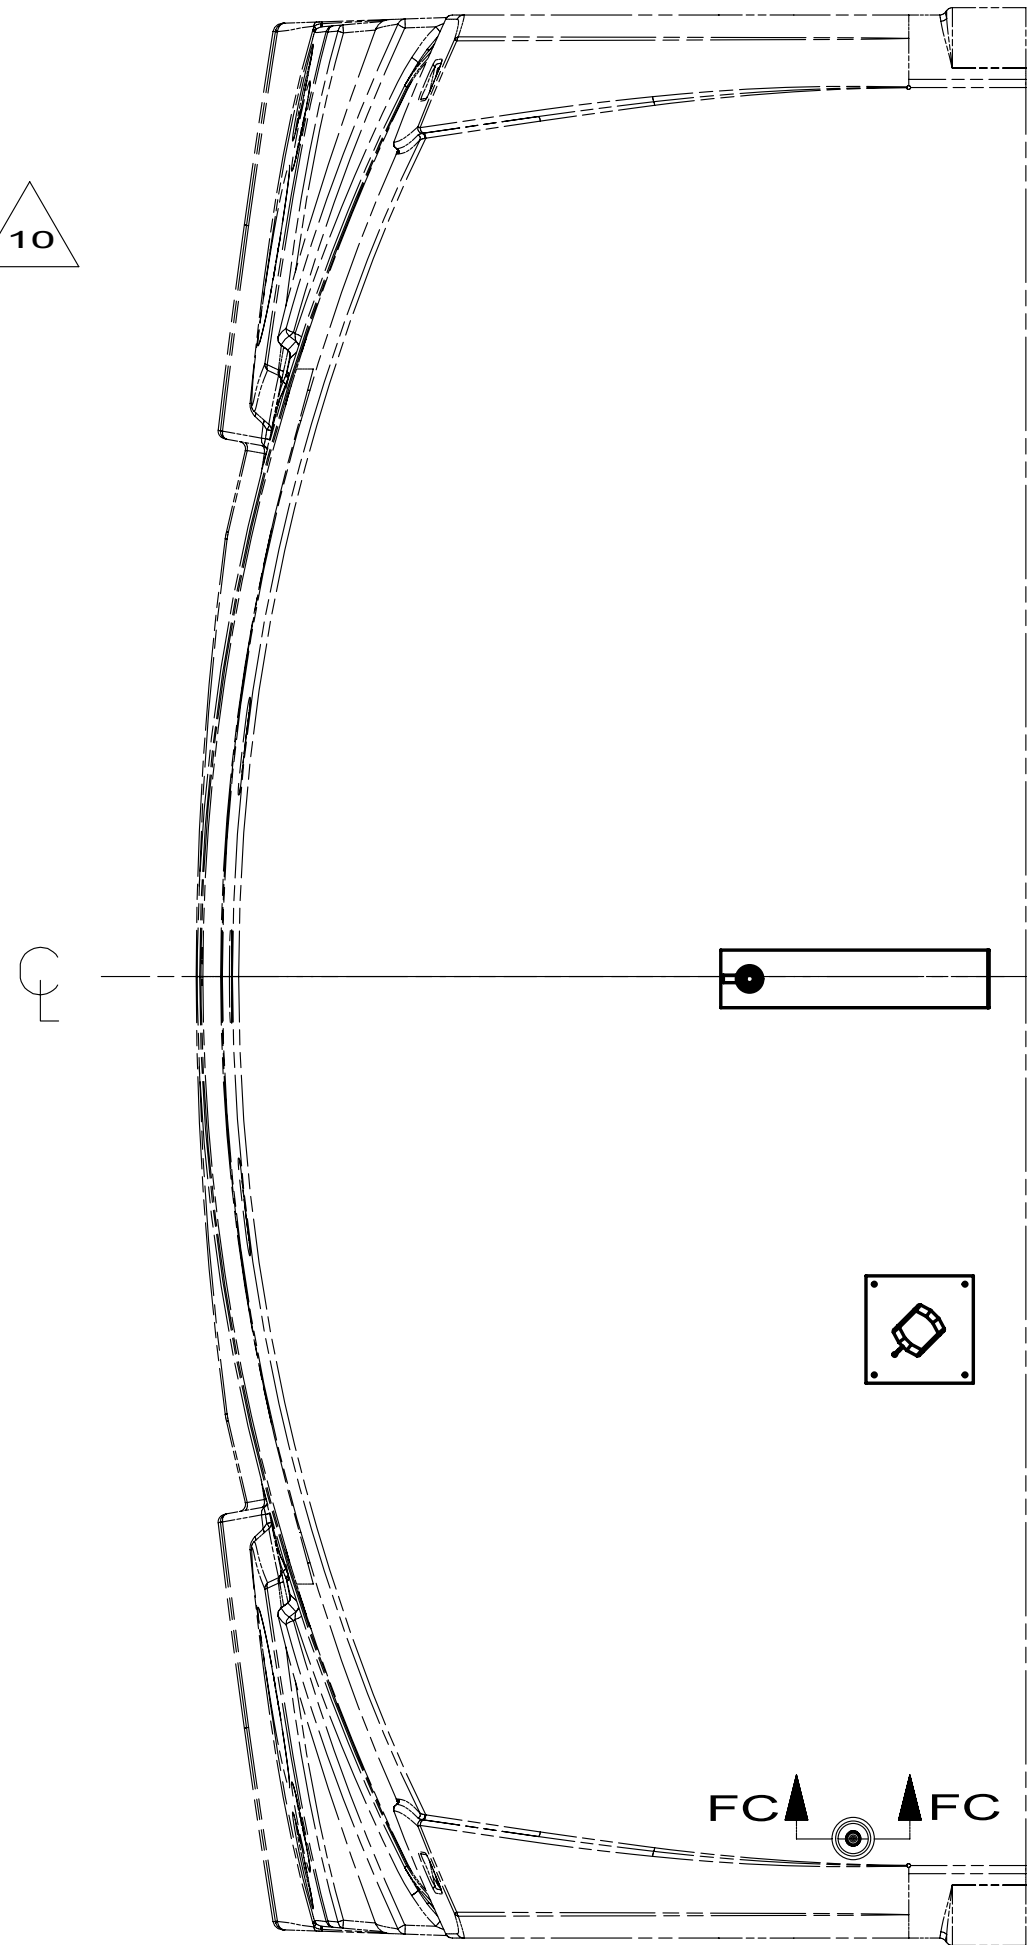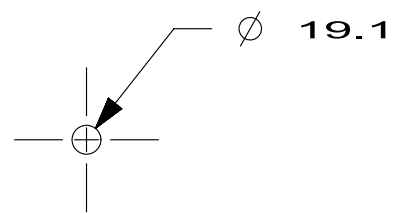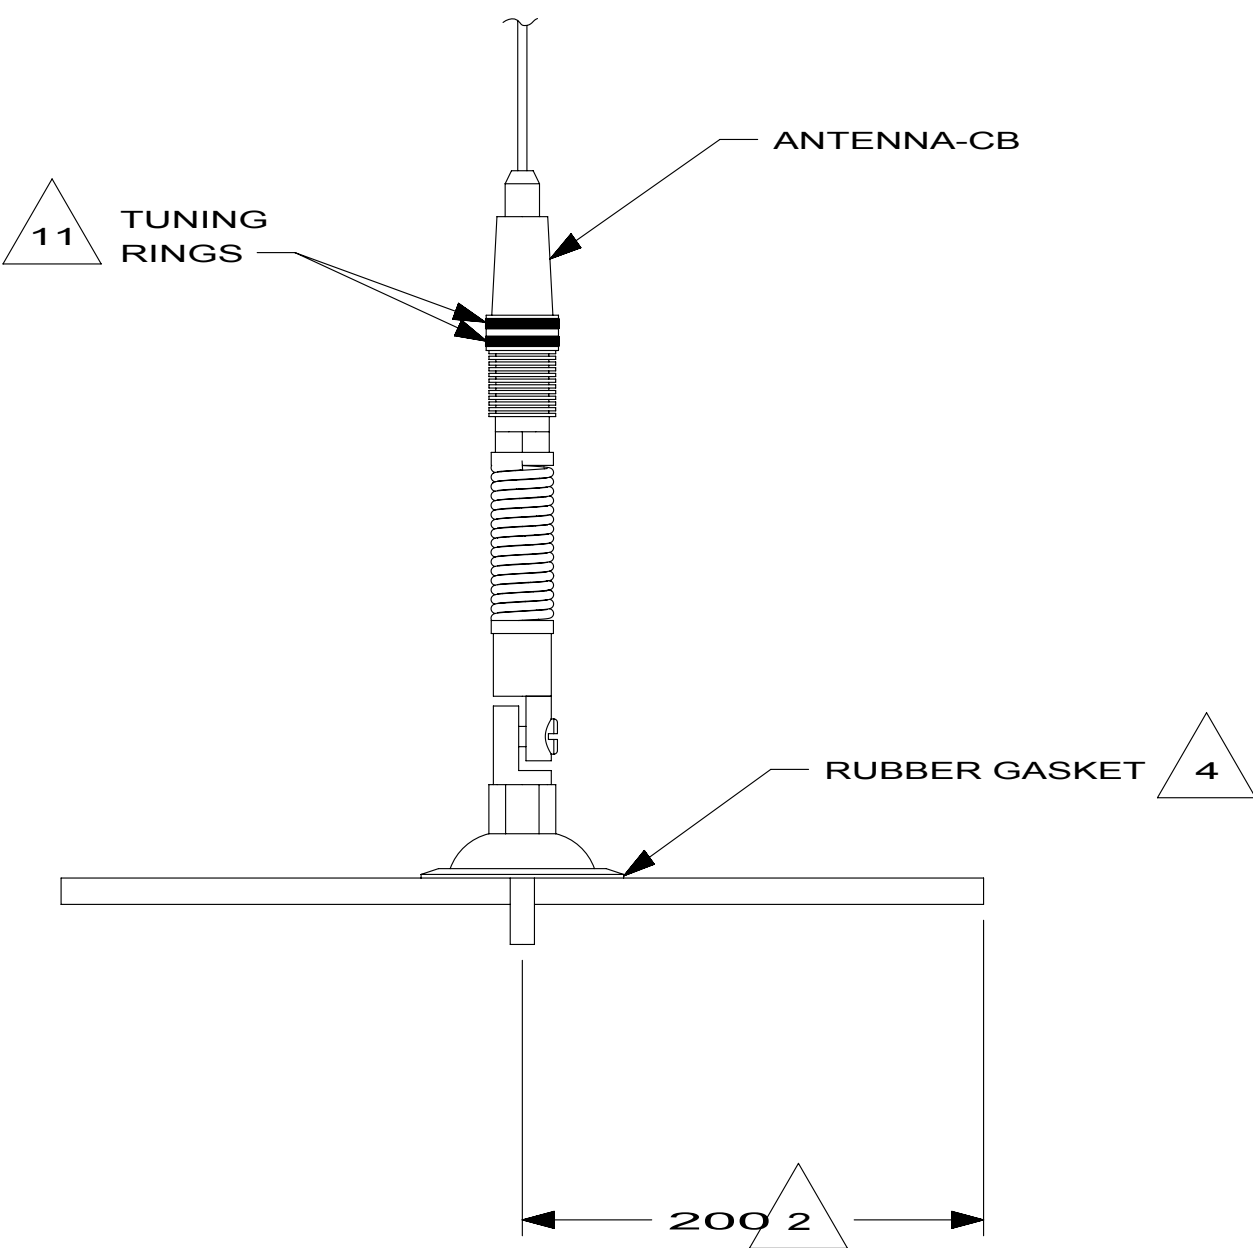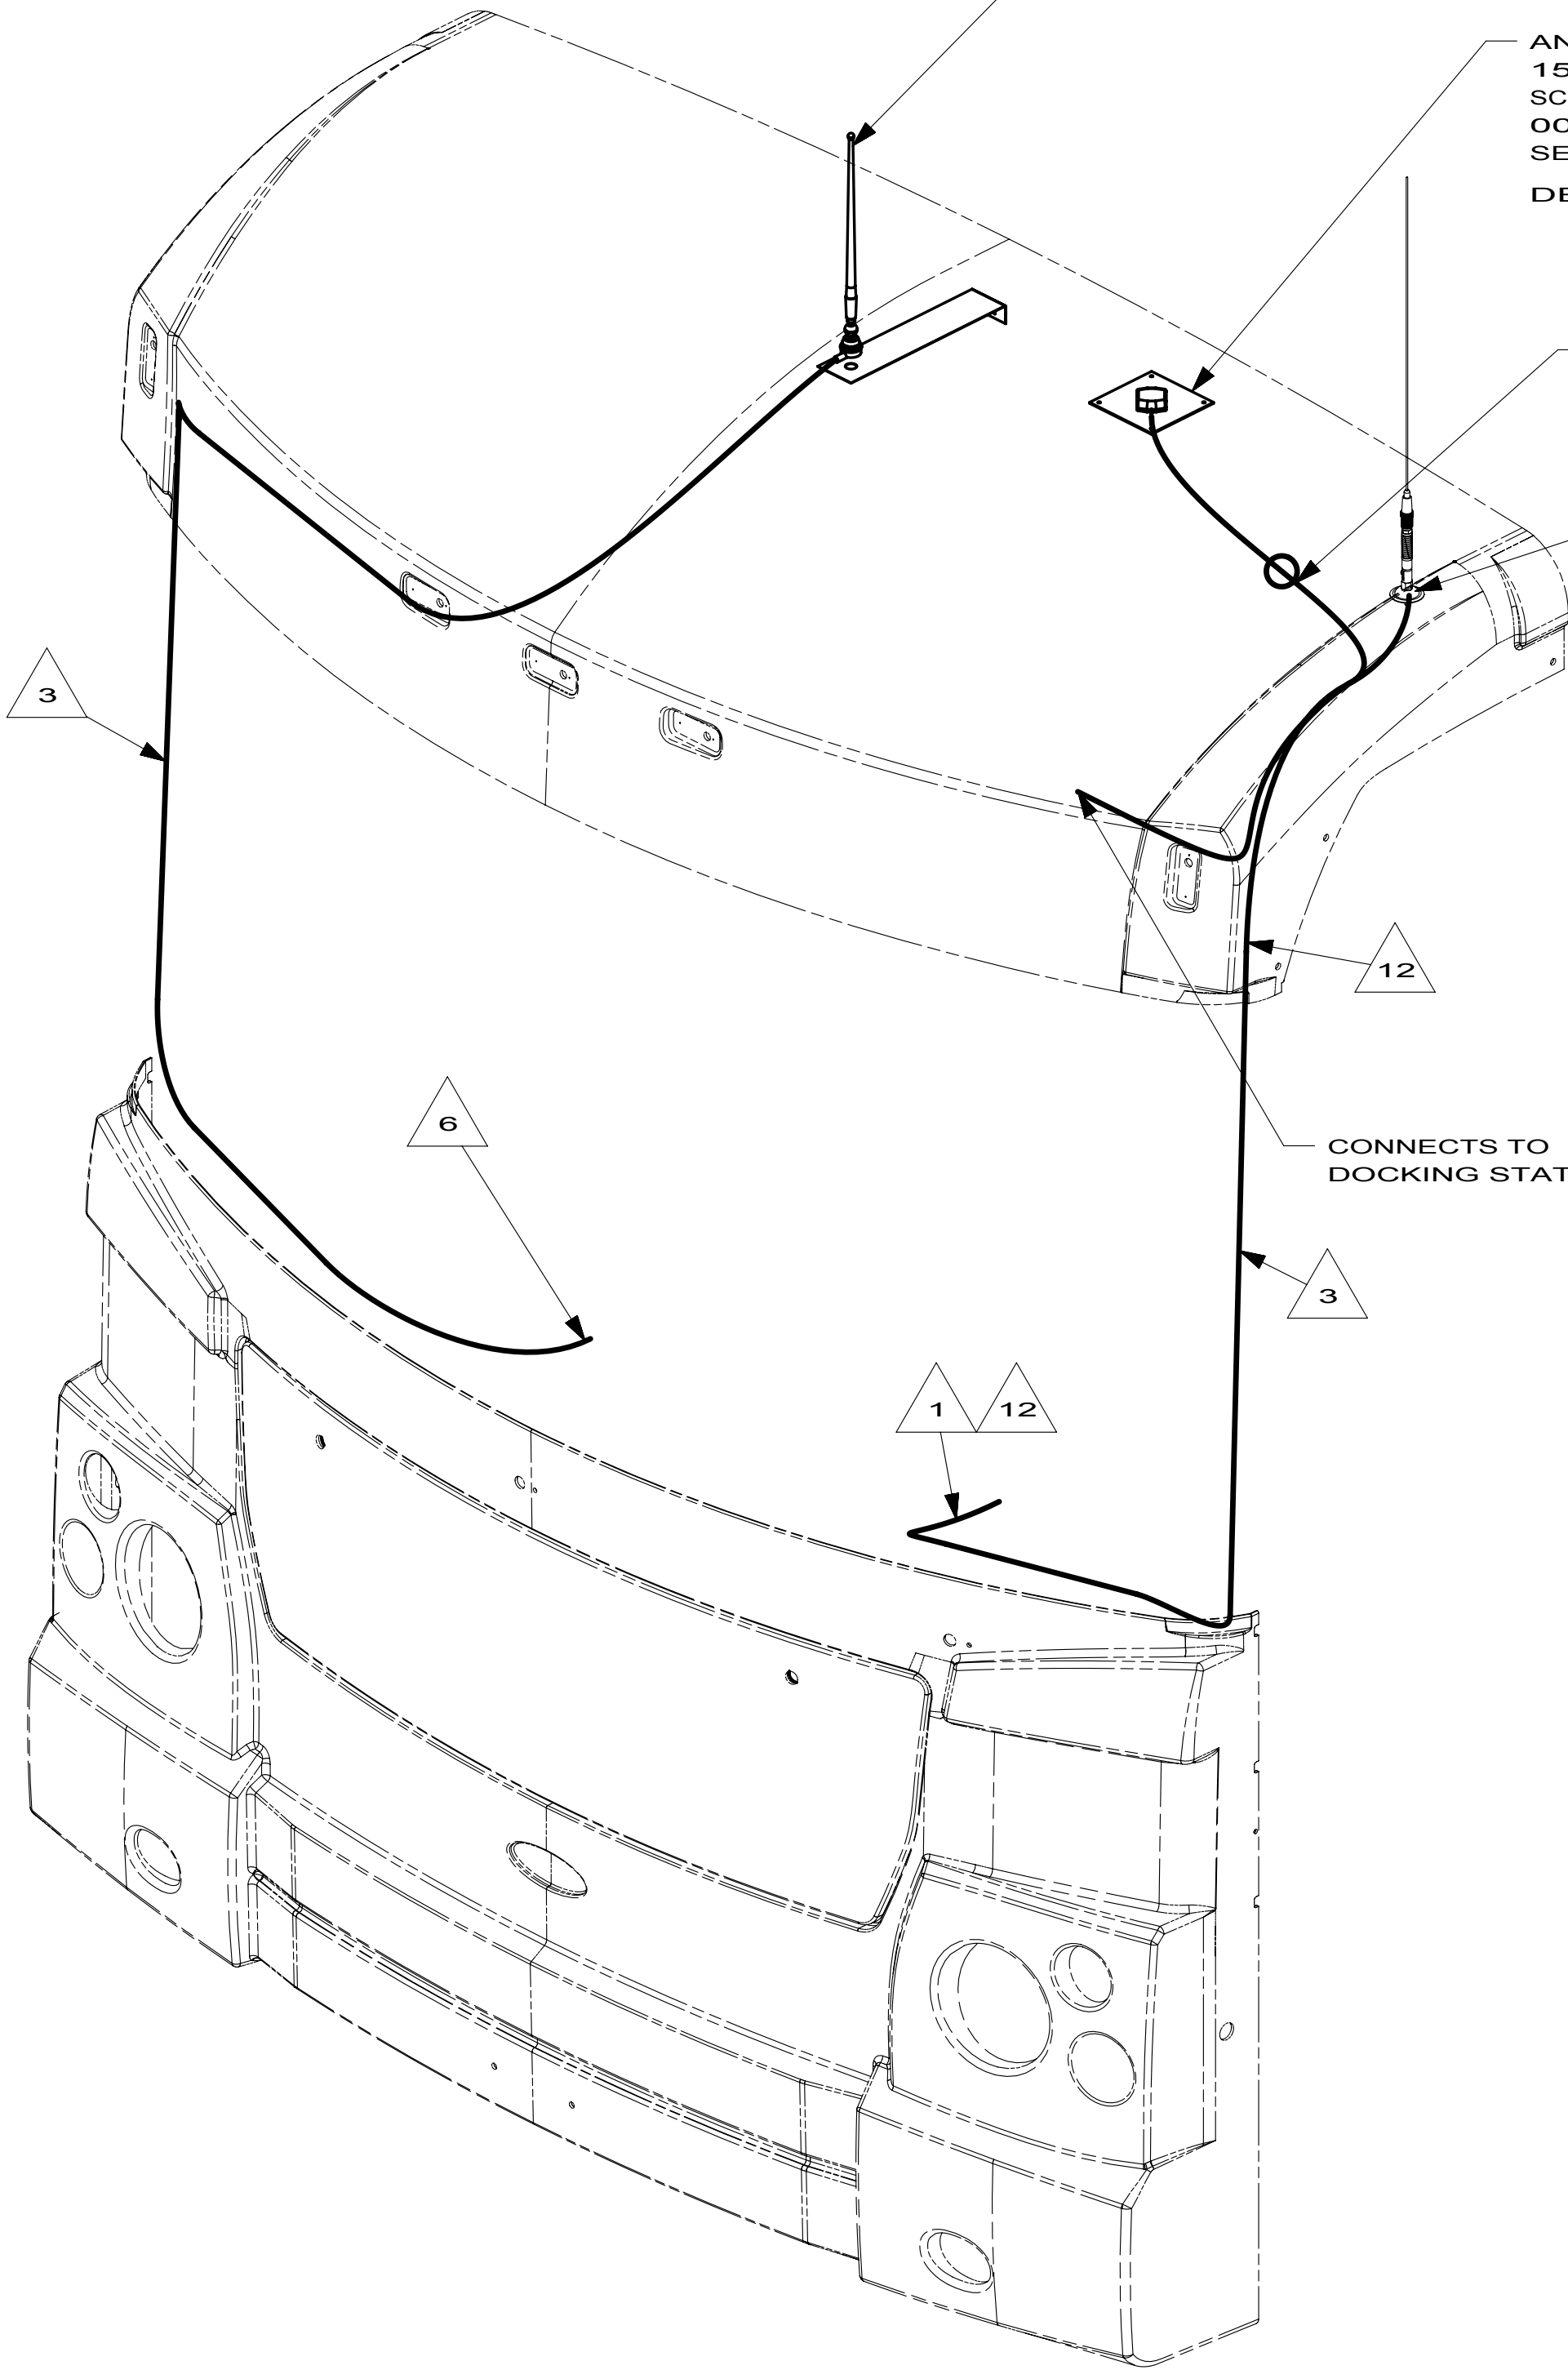P-Series
R-Series
169848-06



- 12 PROVIDE A 1000 MM DROP OF CB ANTENNA CABLE FROM THE TOP OF THE A-PILLAR TO CONNECT TO THE ANTENNA AND PLACE THE EXCESS CABLE IN THE CB PREP BAG LOCATED UNDER THE DASH.
- 11 TUNING RINGS ARE TO BE BOTH ADJUSTED TO THE TOP OF THEIR TRAVEL AND TIGHTENED AGAINST EACH OTHER.
- 10 TIGHTEN JOINTS BETWEEN ANTENNA BASE AND ANTENNA PIVOT AND ALSO THE MAST AND ANTENNA PLATE.
- 9 MOUNT ANTENNA SUCH THAT BASE IS SQUARE W/REAR OF ROOF CAP & HOLE IS DIRECTLY OVER HOLE IN FIBERGLASS. SEAL HOLE IN ROOF CAP, BASE AT SCREWS.
- 8 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 7 USE HOLE IN BRACKET AS GUIDE TO DRILL 13 DIAMETER HOLE IN FIBERGLASS.
- 6 TO RADIO.
- 5 ATTACH ANTENNA-CB GROUND WIRE TO CAB FRAME, USE SCREW 000G39-08-08B.
- 4 SEAL AROUND ANTENNA BASE.
- 3 ROUTE CABLE ALONG A-POST, UNDER TRIM COVER.
- 2 MEASURED FROM REAR EDGE OF FIBERGLASS CAP.
- 1 SEE WIRING INSTL-FRONT END FOR LOCATION OF COAX END AND LABEL.


- 14 USED ON P&R SERIES.
- 13 USED ON M-SERIES.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 70C RADIO - SATELLITE
- 40C RADIO - CB
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ANTENNA INSTL-RADIO AND CB		
SHEET 6	PART NO 169848	REV


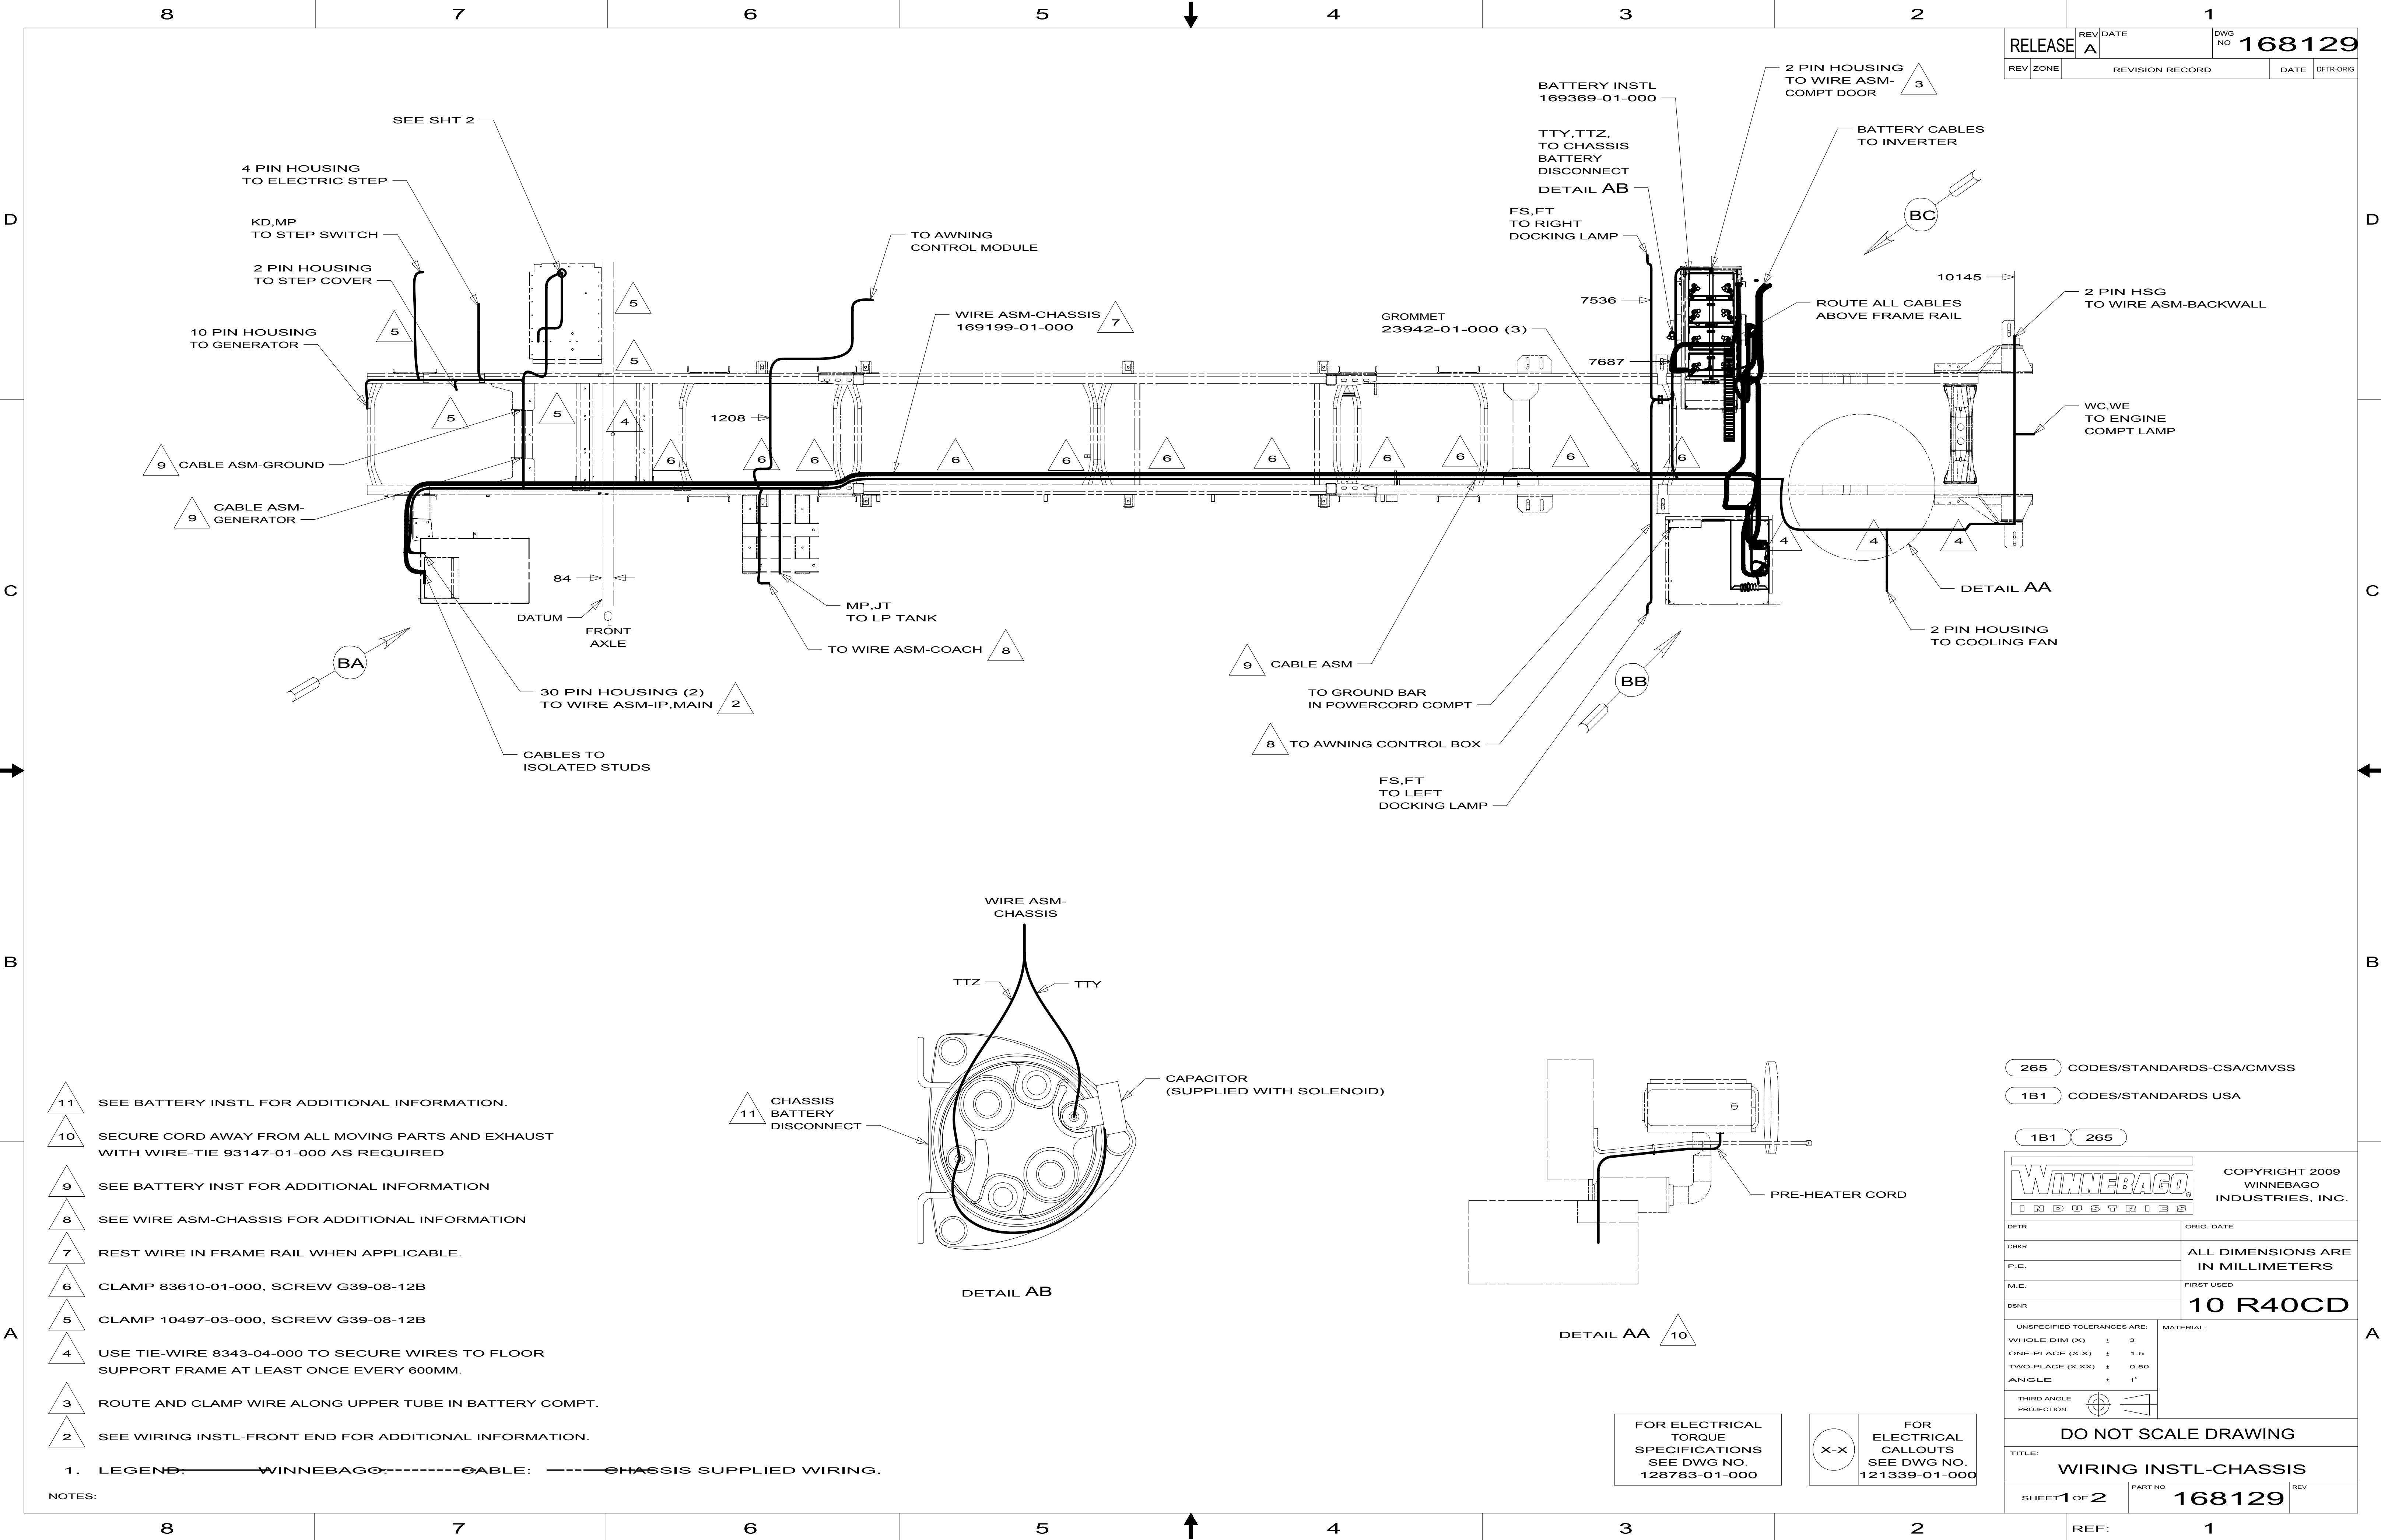


RELEASE		REV A	DATE		DWG NO	168129	
REV	ZONE	REVISION RECORD				DATE	DFTR-ORIG

- 11 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 10 SECURE CORD AWAY FROM ALL MOVING PARTS AND EXHAUST WITH WIRE-TIE 93147-01-000 AS REQUIRED
- 9 SEE BATTERY INST FOR ADDITIONAL INFORMATION
- 8 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION
- 7 REST WIRE IN FRAME RAIL WHEN APPLICABLE.
- 6 CLAMP 83610-01-000, SCREW G39-08-12B
- 5 CLAMP 10497-03-000, SCREW G39-08-12B
- 4 USE TIE-WIRE 8343-04-000 TO SECURE WIRES TO FLOOR SUPPORT FRAME AT LEAST ONCE EVERY 600MM.
- 3 ROUTE AND CLAMP WIRE ALONG UPPER TUBE IN BATTERY COMPT.
- 2 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.

1. LEGEND: — WINNEBAGO — CABLE: — CHASSIS SUPPLIED WIRING.

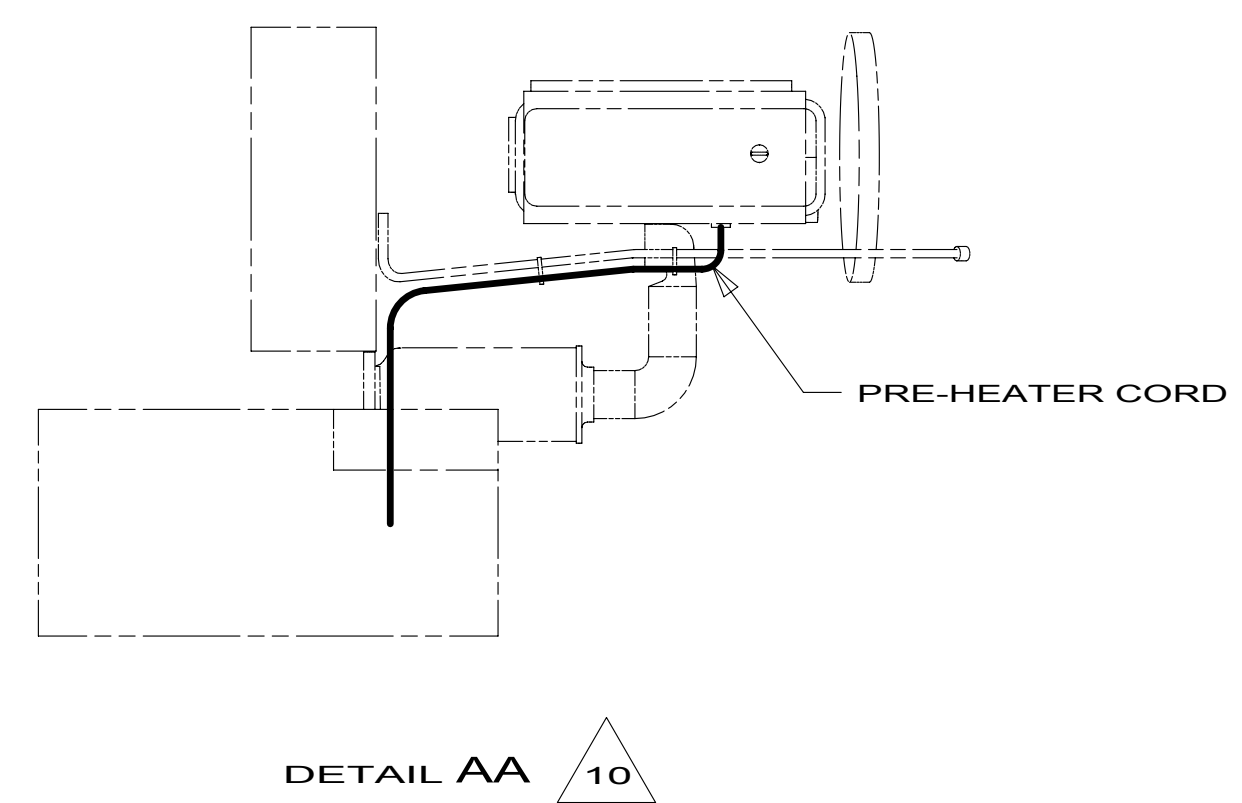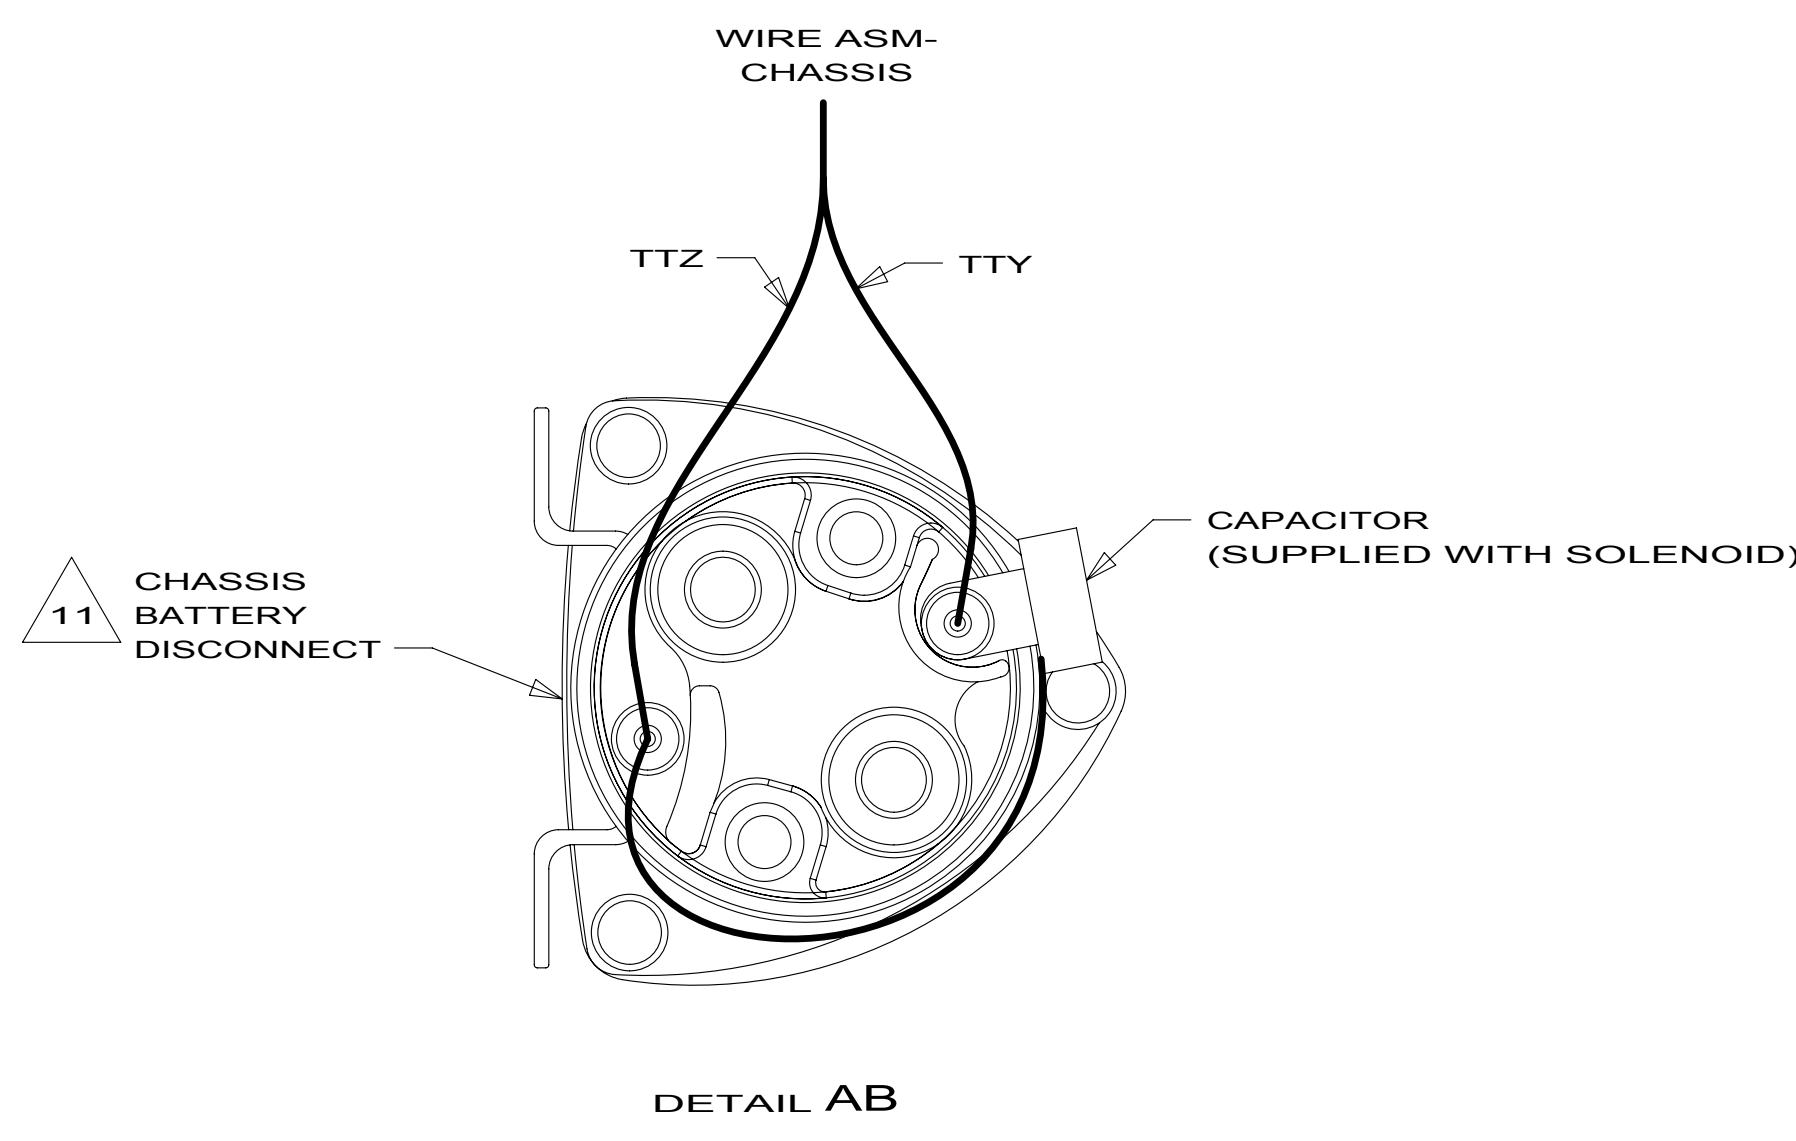NOTES:



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265

1B1

1B1

265


WINNEBAGO INDUSTRIES

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHGR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	
DSNR	
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	

DO NOT SCALE DRAWING

TITLE:		WIRING INSTL-CHASSIS	
SHEET 1 OF 2	PART NO	168129	REV
REF:		1	

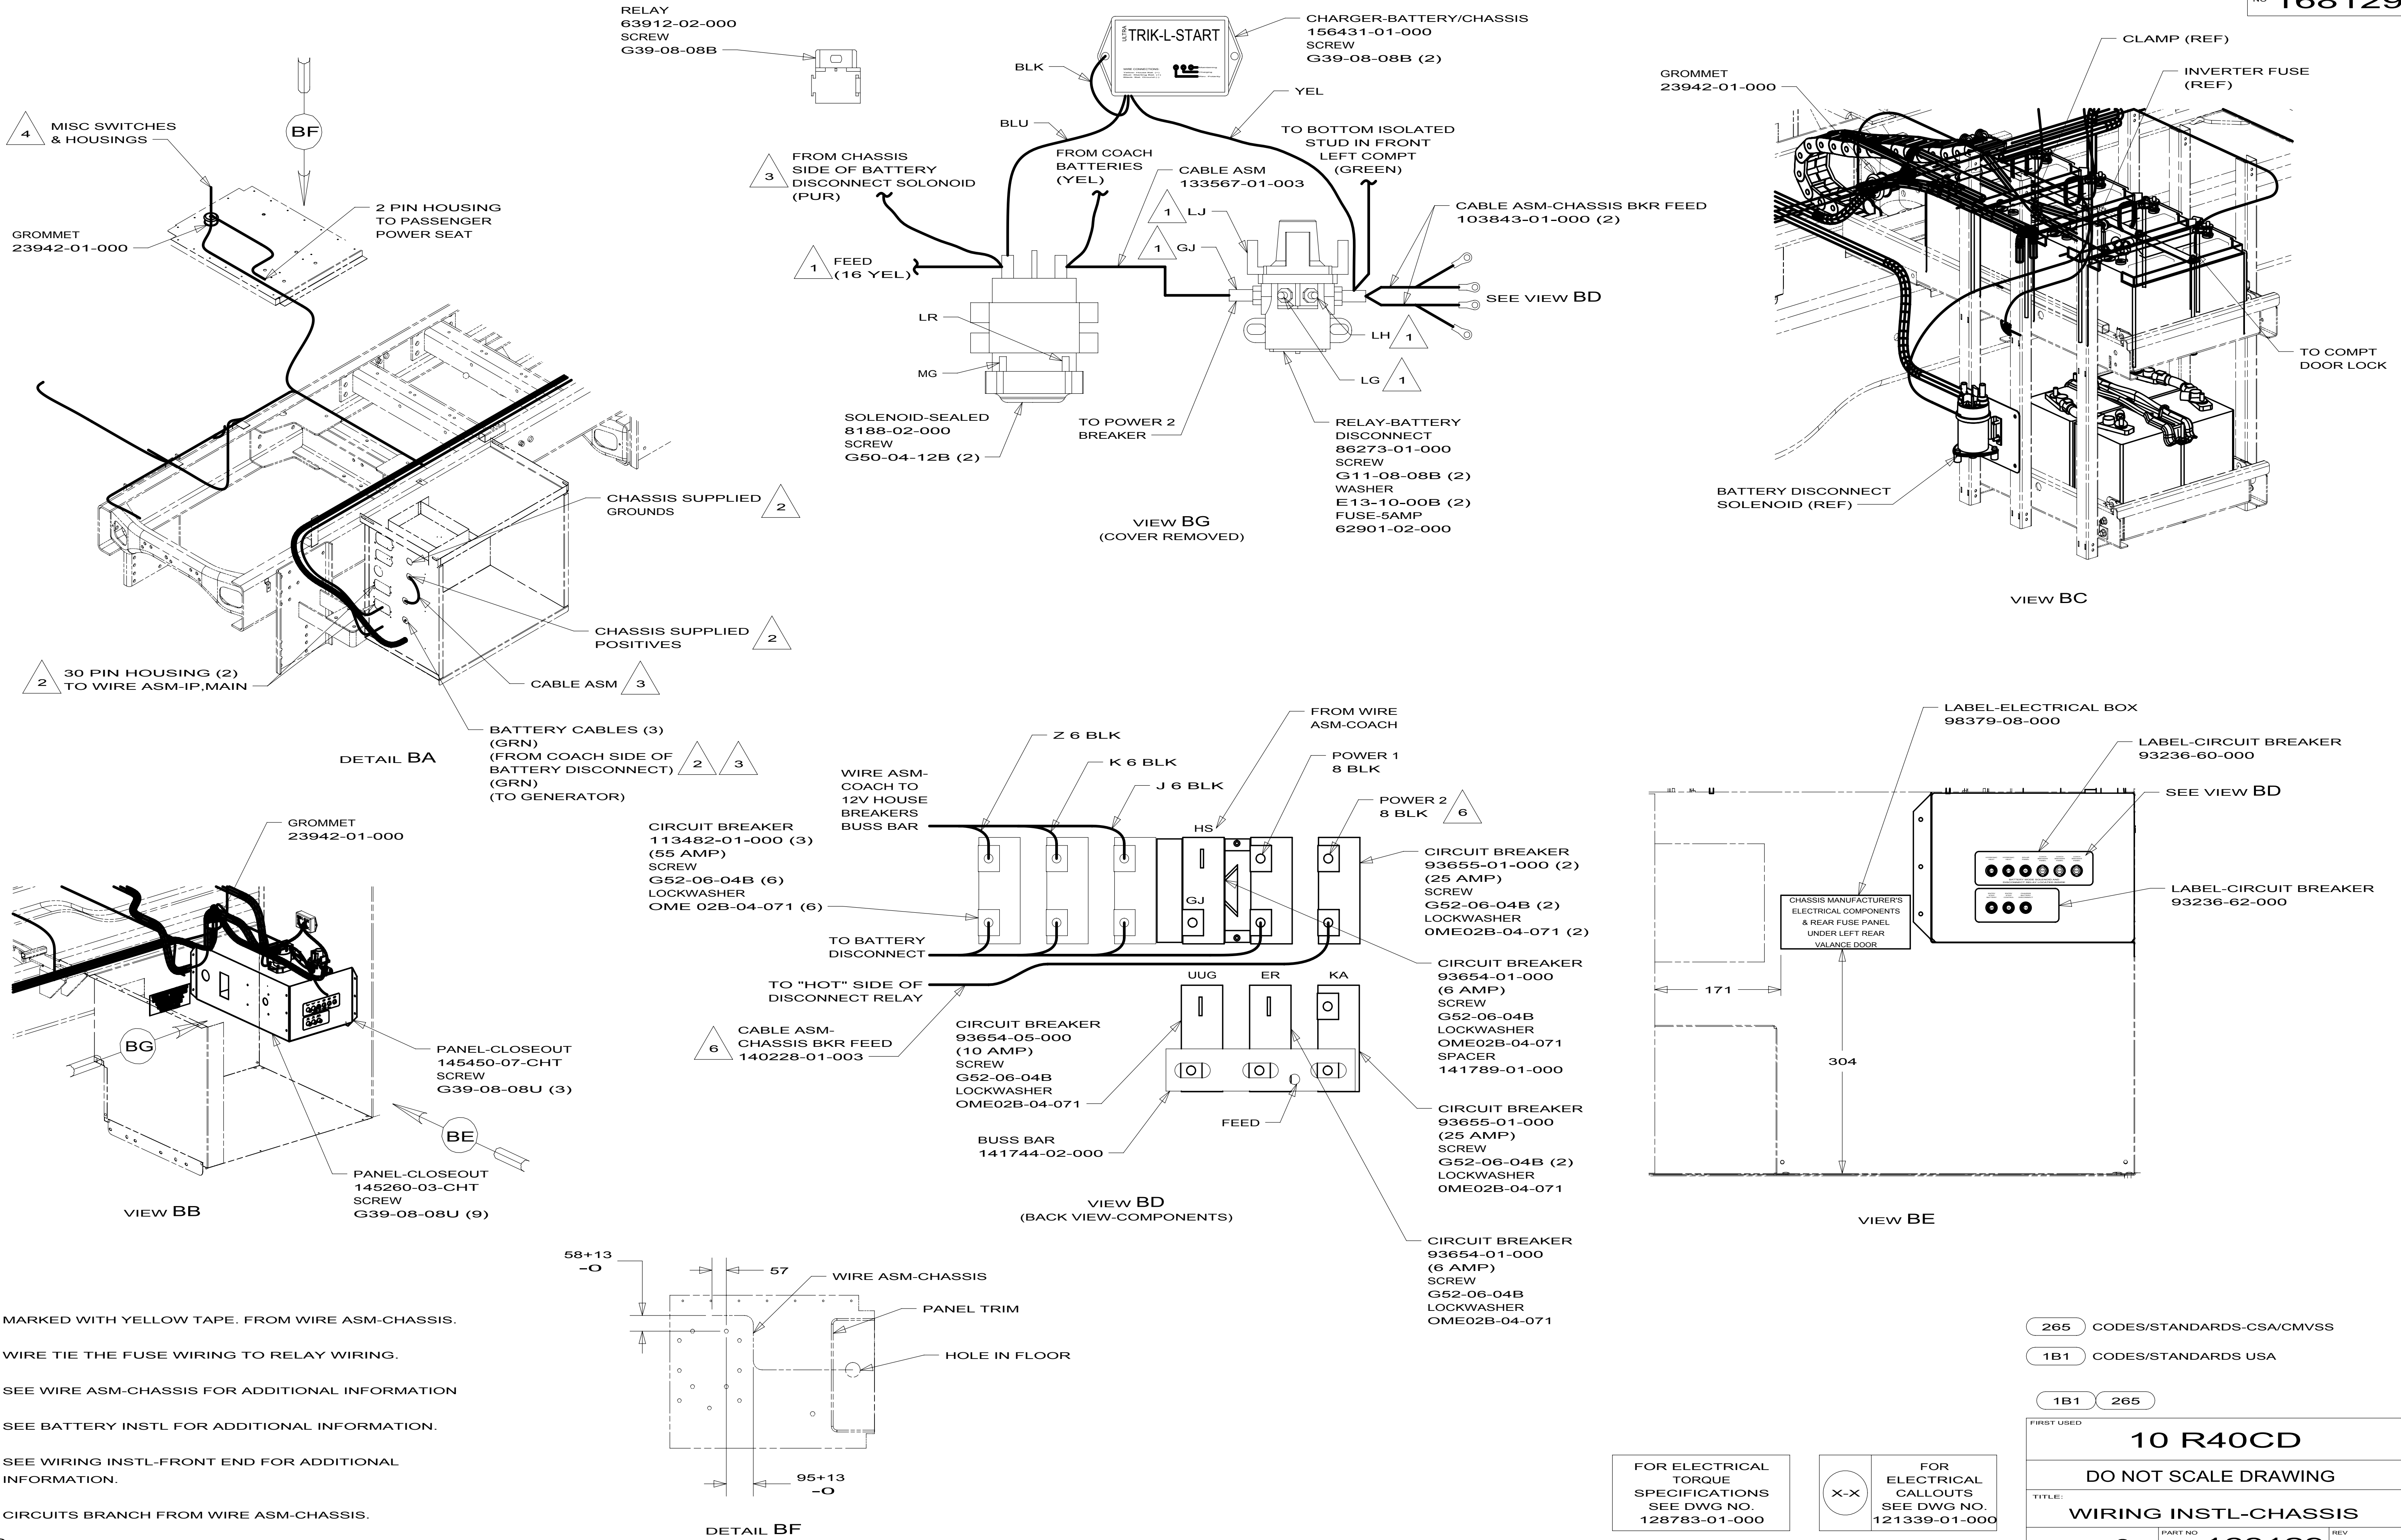

- NOTES:**
- 6 MARKED WITH YELLOW TAPE. FROM WIRE ASM-CHASSIS.
 - 5 WIRE TIE THE FUSE WIRING TO RELAY WIRING.
 - 4 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION
 - 3 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
 - 2 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
 - 1 CIRCUITS BRANCH FROM WIRE ASM-CHASSIS.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265
FIRST USED	
10 R40CD	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-CHASSIS	
SHEET 2	PART NO 168129
REV	

8

7

6

5

4

3

2

1

DRAWING NO.

MODELS

169369-01

R40CD,R40BD,R40WD

169369-02

R42AD

RELEASE

REV

DATE

DWG NO

169369

REV

ZONE

REVISION RECORD

DATE

DfTR-ORIG

D

C

B

A

↑

↓

8

7

6

5

4

3

2

1

3

2

1

SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.

SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1B1

265

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

WINNEBAGO INDUSTRIES

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.

DfTR

ORIG. DATE

CHGR

ALL DIMENSIONS ARE IN MILLIMETERS

P.E.

M.E.

FIRST USED

DSNR

10 R-SERIES

UNSPECIFIED TOLERANCES ARE:

WHOLE DIM (X) ± 3

ONE-PLACE (X.X) ± 1.5

TWO-PLACE (X.XX) ± 0.50

ANGLE ± 1°

MATERIAL:

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

TITLE:

BATTERY INSTL

SHEET1 OF 4

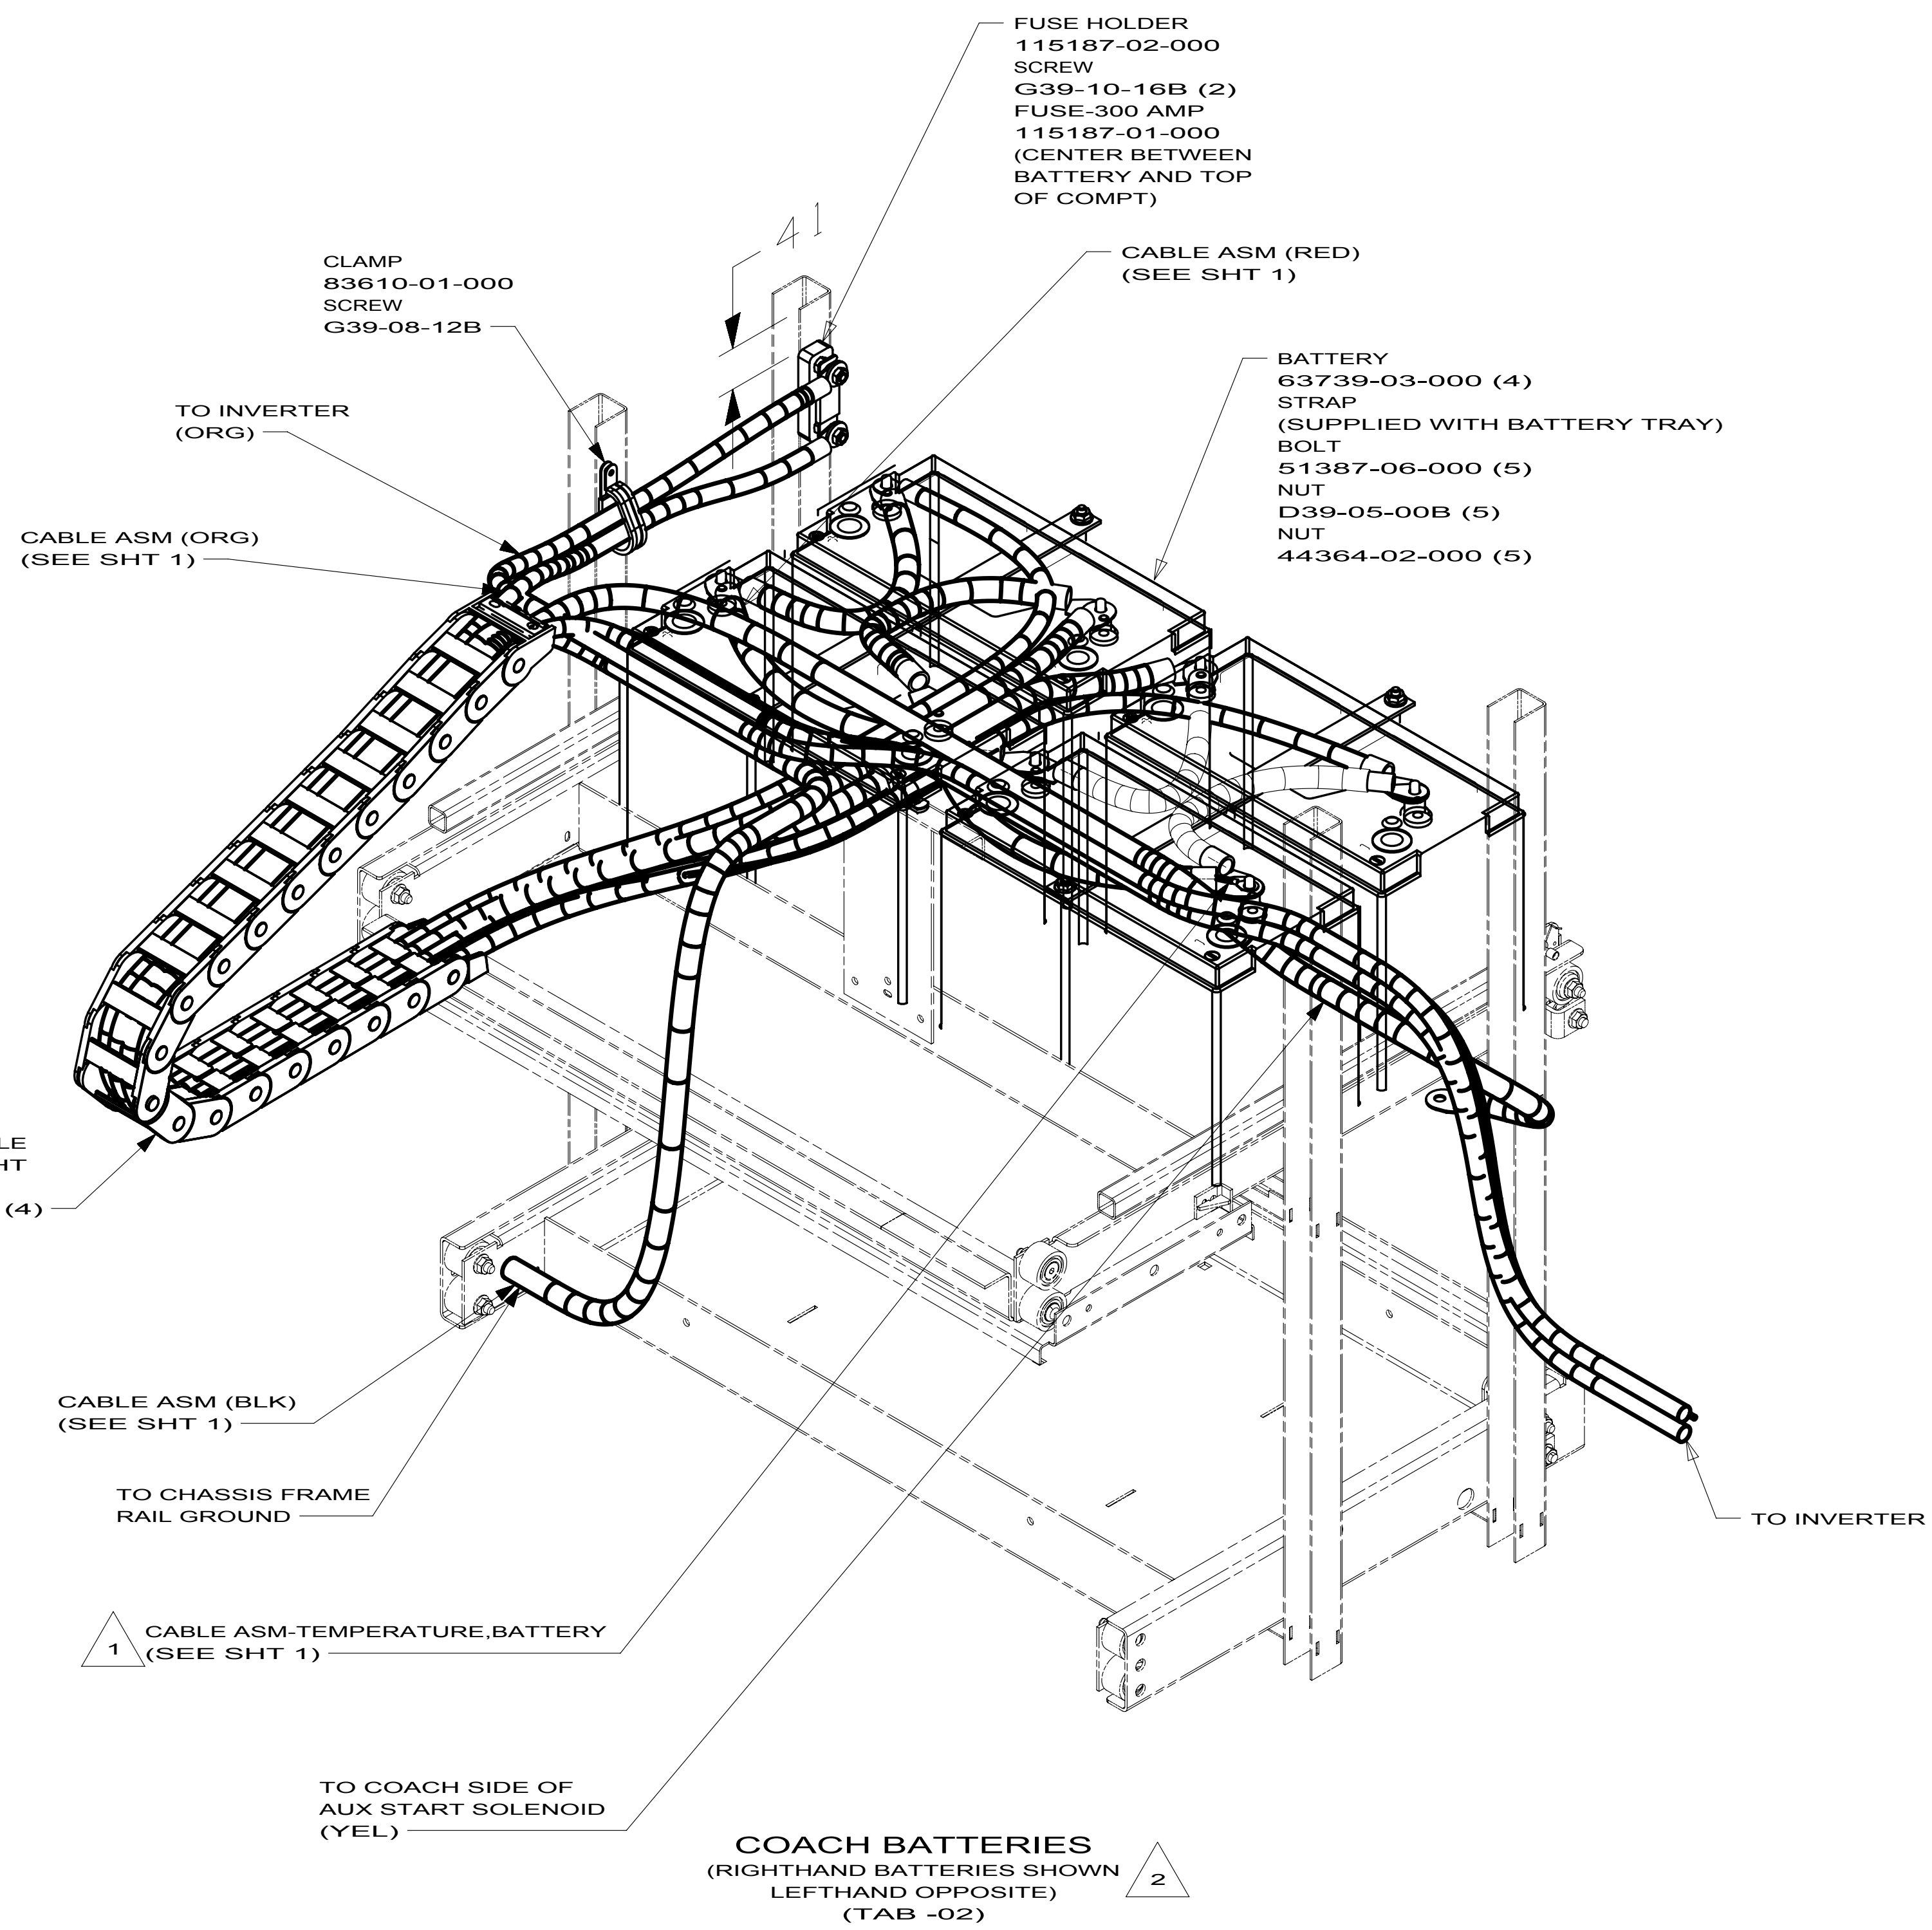
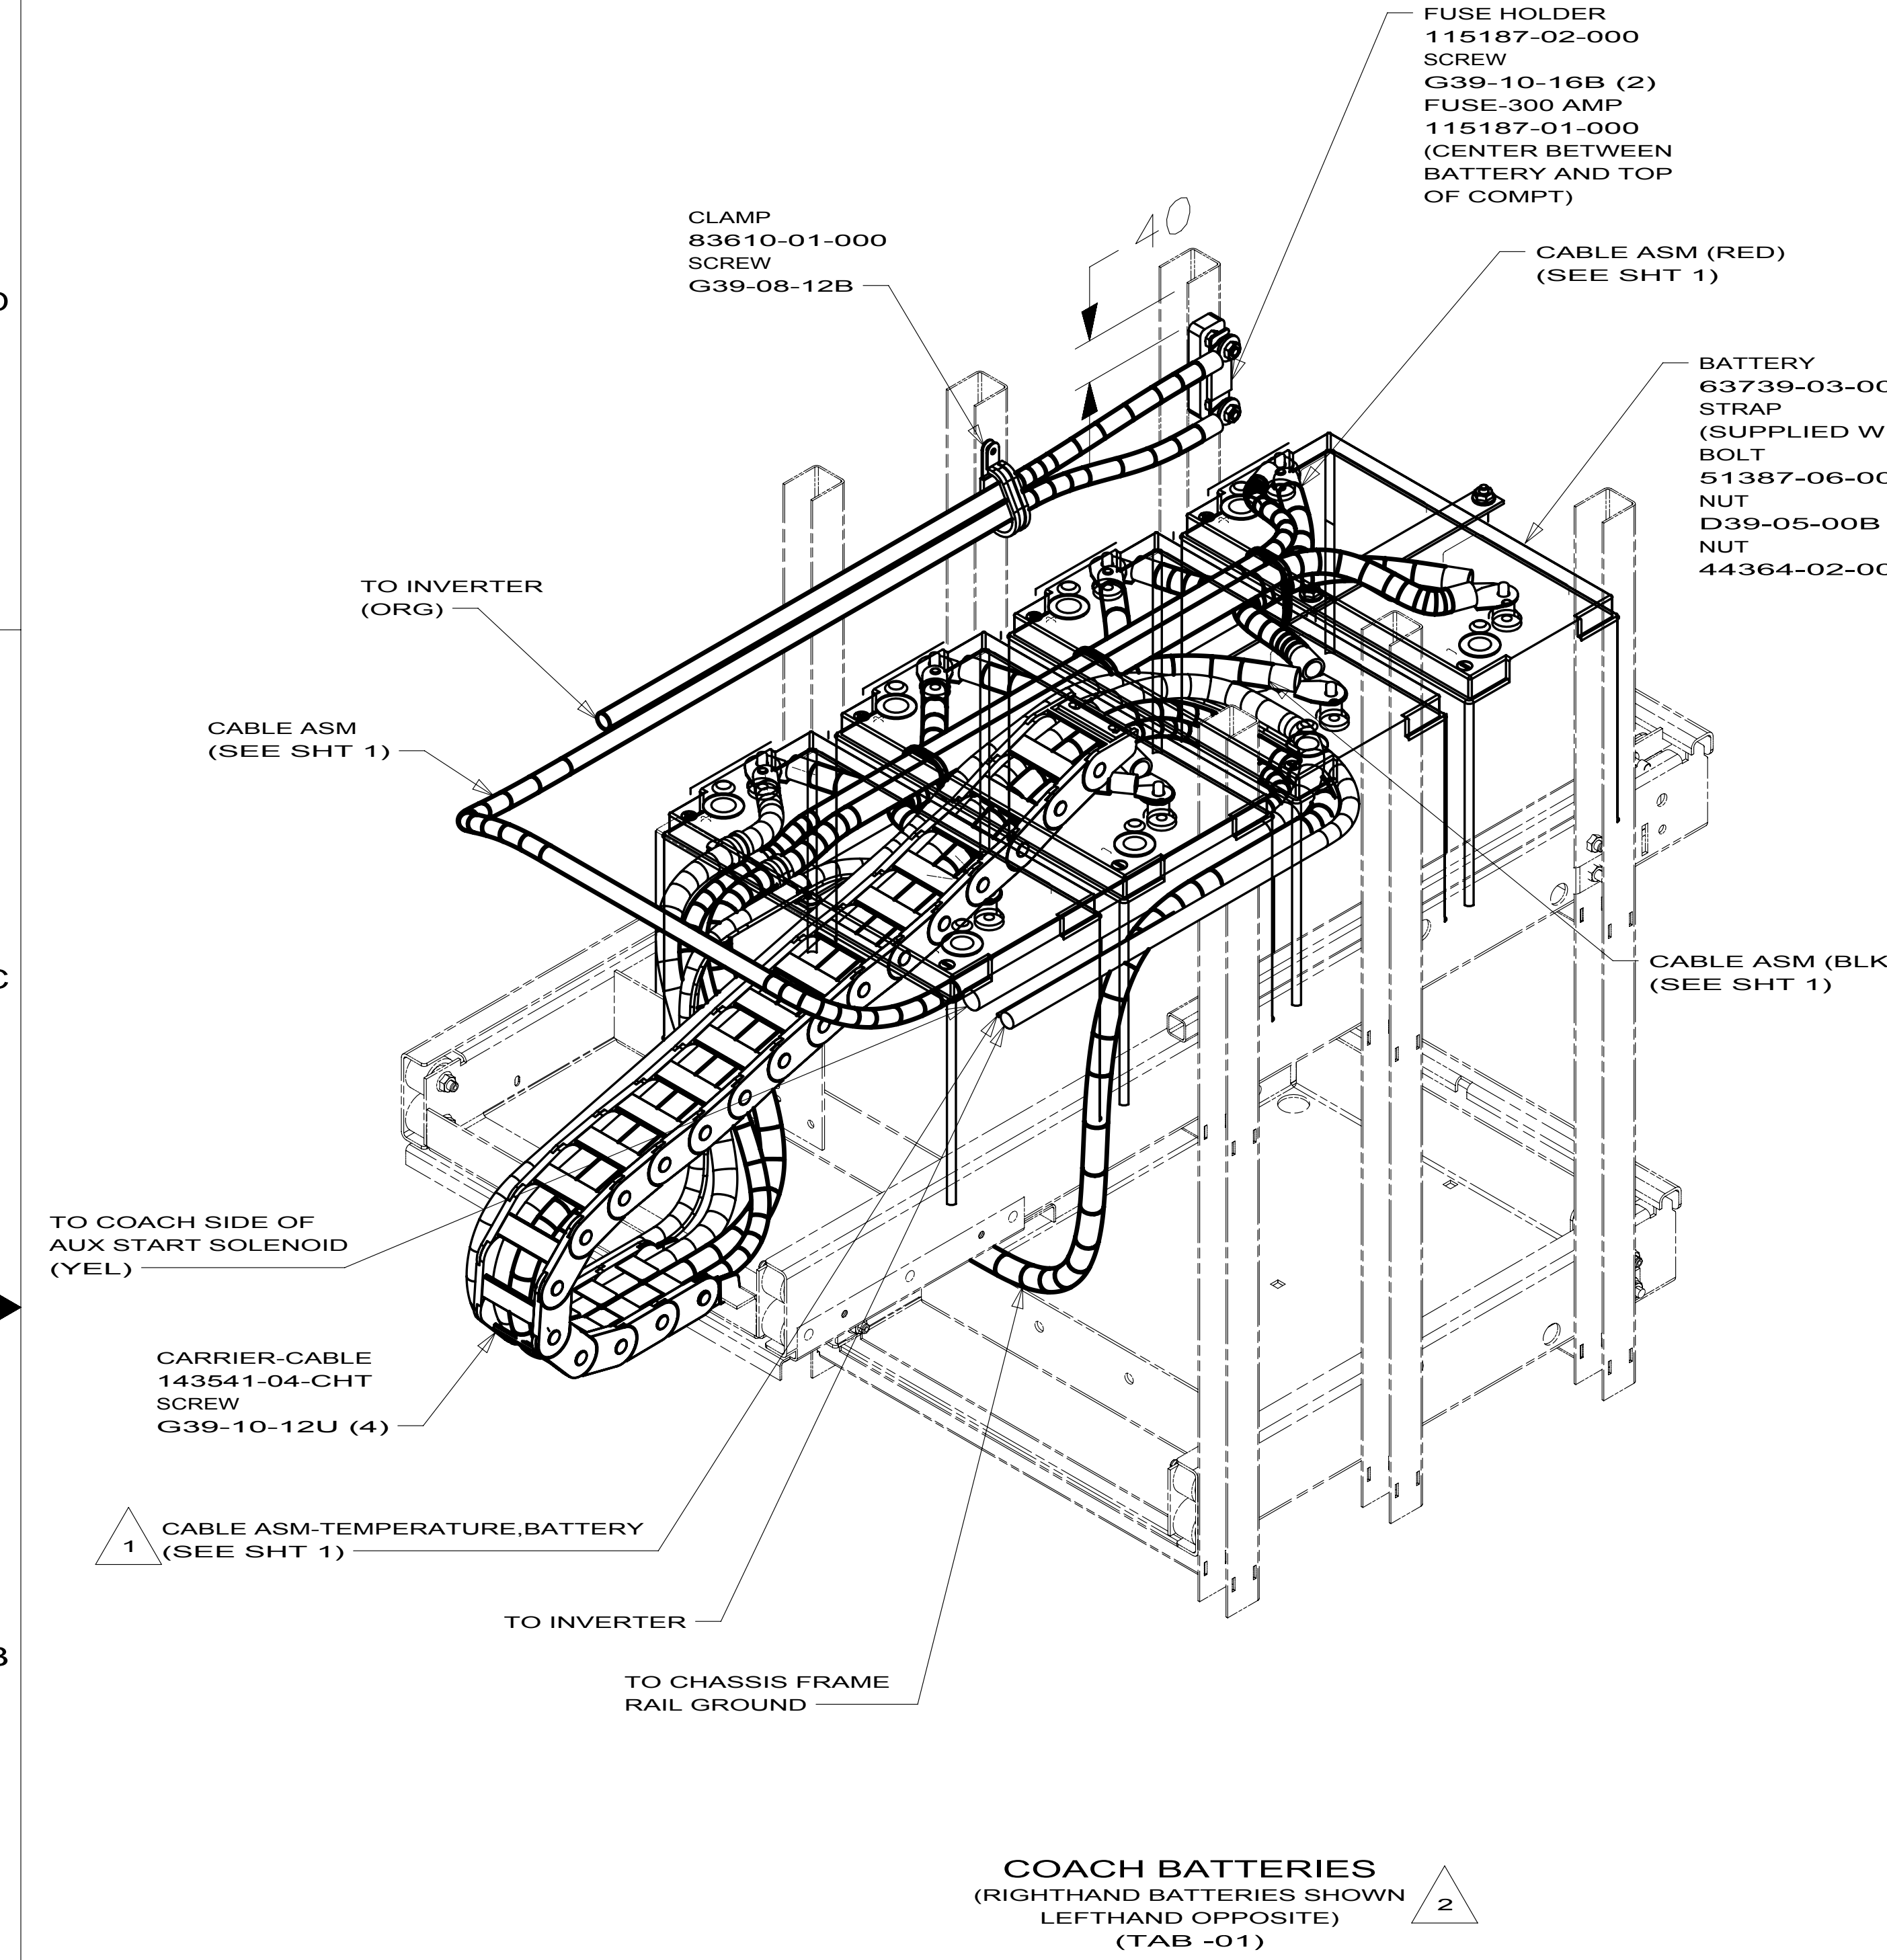
PART NO

169369

REV

REF:

1



2 SEE WIRING ISTL-CHASSIS FOR ADDITIONAL INFORMATION.

1 CONNECT RING TERMINAL OF CABLE ASM-TEMP,BATTERY TO NEGATIVE POST AS SHOWN AND ROUTE CABLE WITH NEGATIVE BATTERY CABLE TO INVERTER.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 2	PART NO 169369	REV

D

C

B

A

D

C

B

A

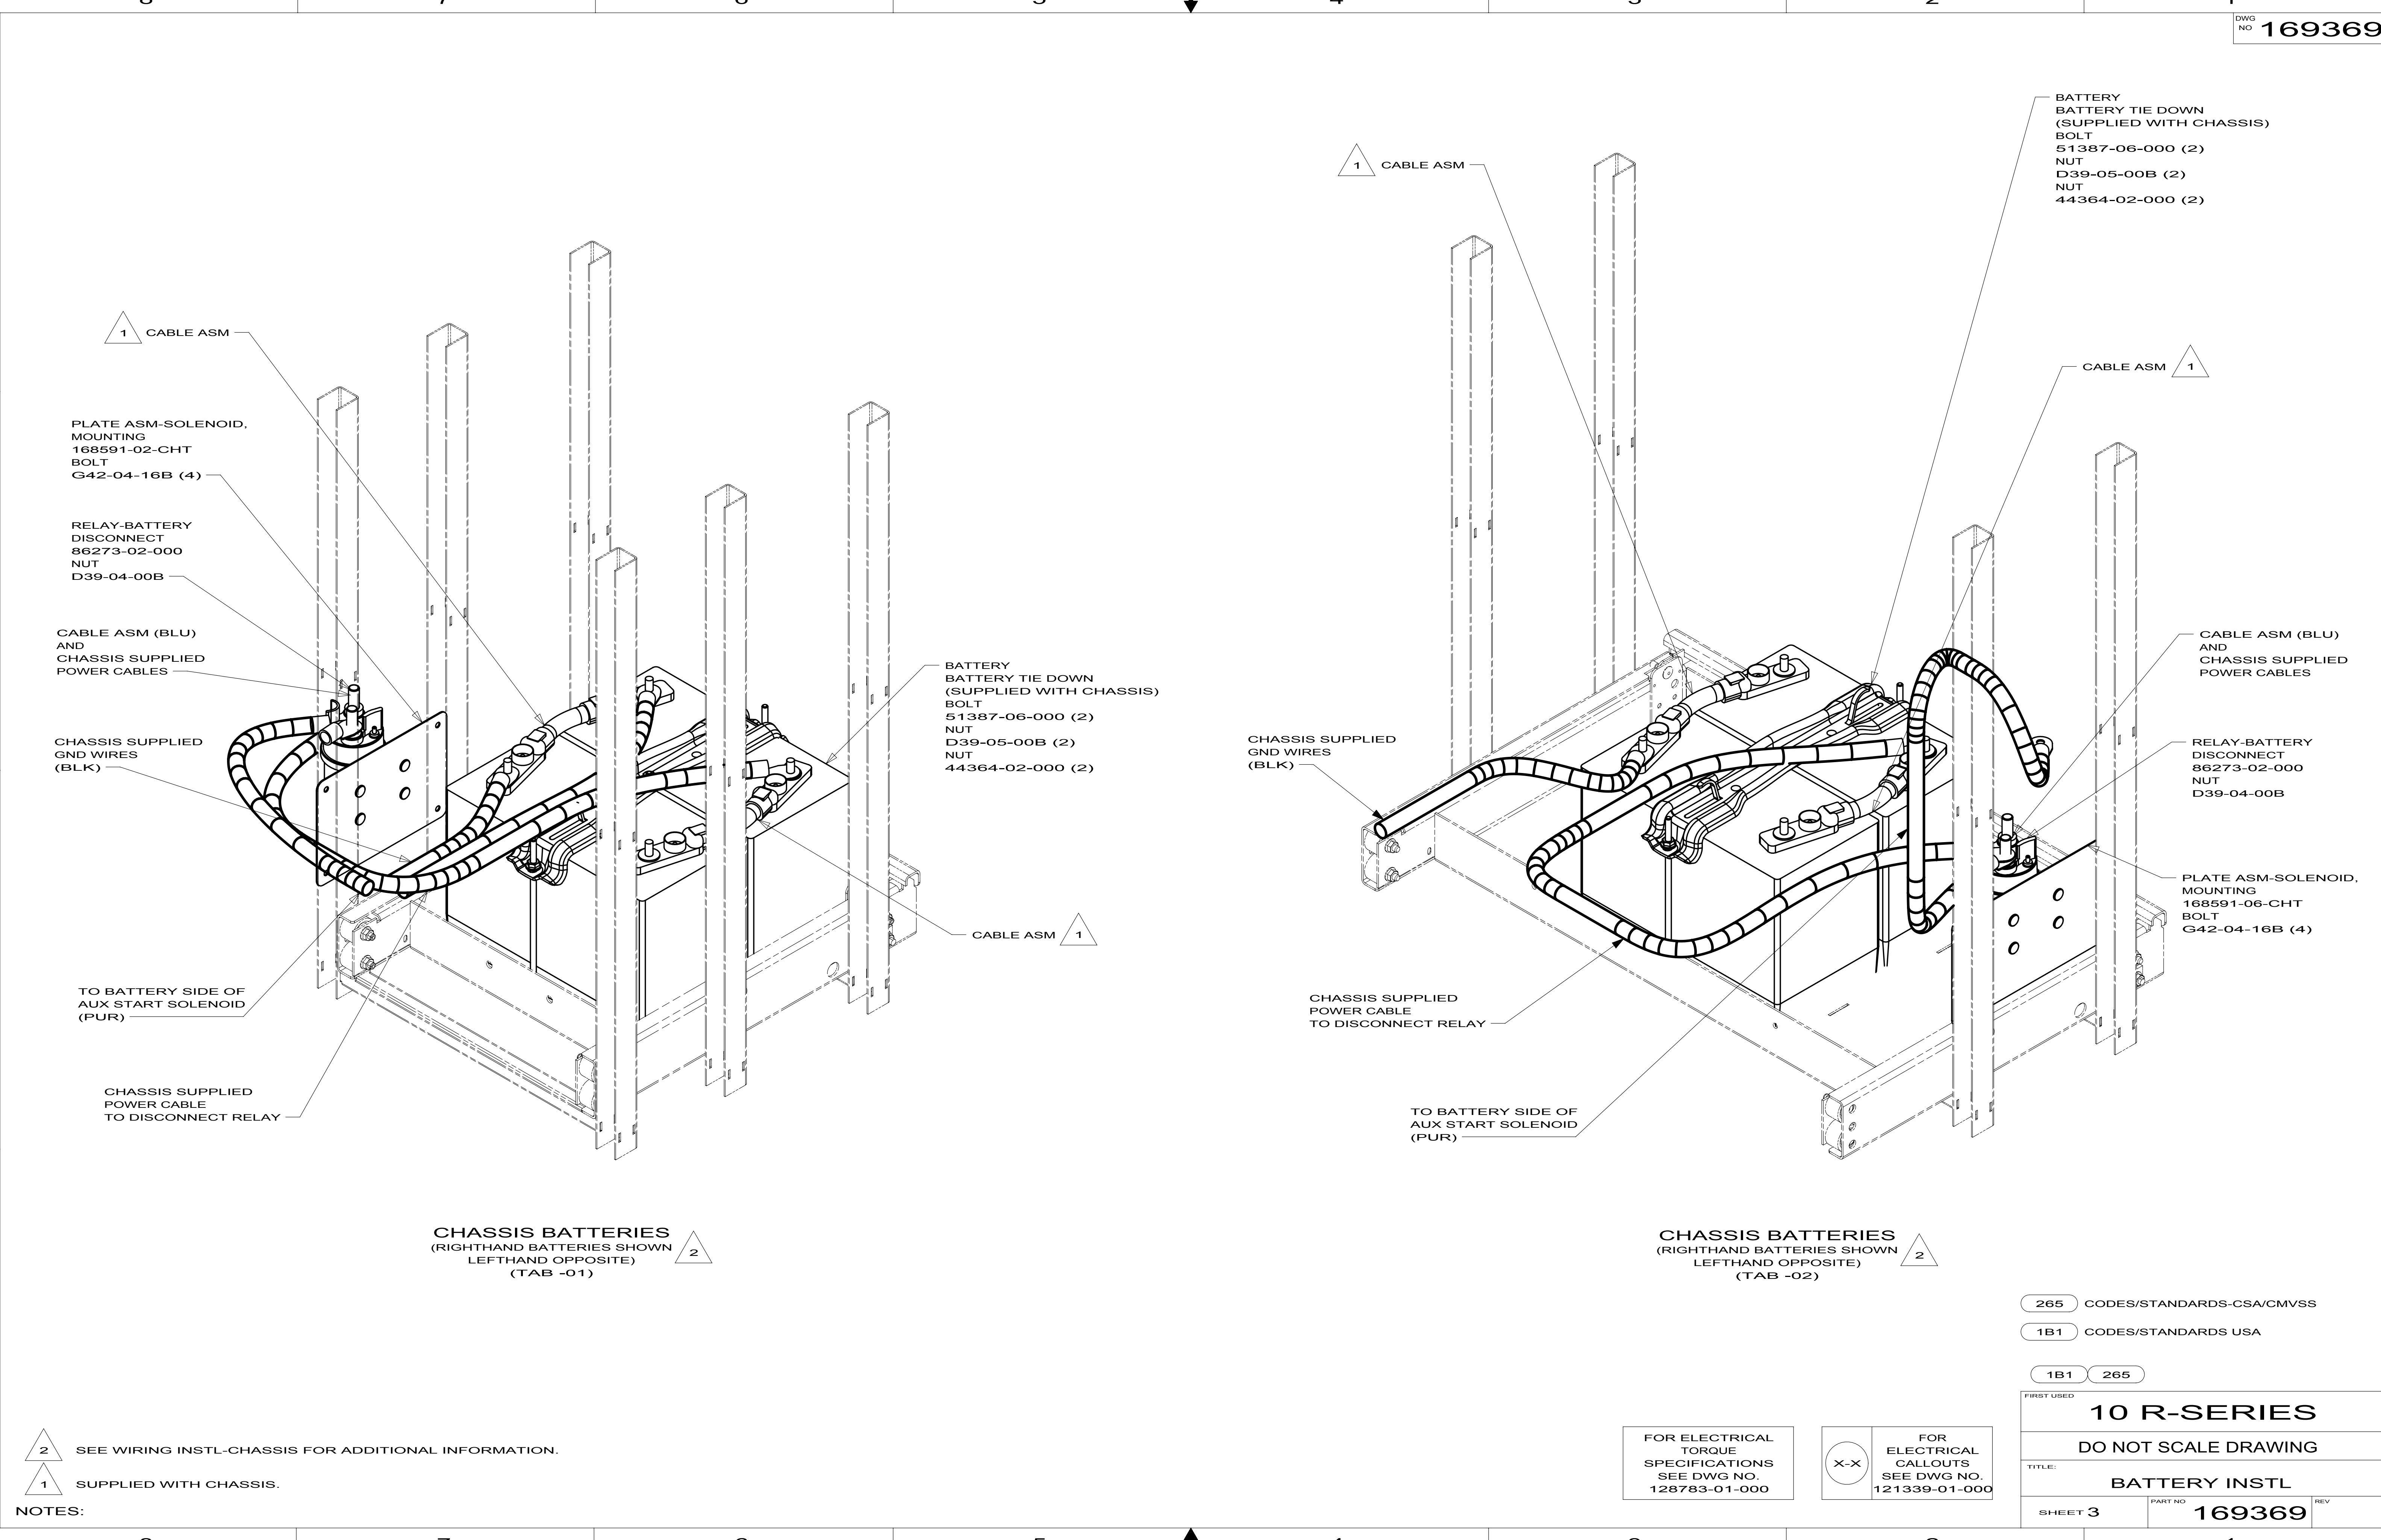


PLATE ASM-SOLENOID,
MOUNTING
168591-02-CHT
BOLT
G42-04-16B (4)

RELAY-BATTERY
DISCONNECT
86273-02-000
NUT
D39-04-00B

CABLE ASM (BLU)
AND
CHASSIS SUPPLIED
POWER CABLES

CHASSIS SUPPLIED
GND WIRES
(BLK)

TO BATTERY SIDE OF
AUX START SOLENOID
(PUR)

CHASSIS SUPPLIED
POWER CABLE
TO DISCONNECT RELAY

BATTERY
BATTERY TIE DOWN
(SUPPLIED WITH CHASSIS)
BOLT
51387-06-000 (2)
NUT
D39-05-00B (2)
NUT
44364-02-000 (2)

CABLE ASM

CHASSIS BATTERIES
(RIGHTHAND BATTERIES SHOWN
LEFTHAND OPPOSITE)
(TAB -01)

2 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
1 SUPPLIED WITH CHASSIS.

NOTES:

CHASSIS SUPPLIED
GND WIRES
(BLK)

CHASSIS SUPPLIED
POWER CABLE
TO DISCONNECT RELAY

TO BATTERY SIDE OF
AUX START SOLENOID
(PUR)

BATTERY
BATTERY TIE DOWN
(SUPPLIED WITH CHASSIS)
BOLT
51387-06-000 (2)
NUT
D39-05-00B (2)
NUT
44364-02-000 (2)

CABLE ASM

CABLE ASM (BLU)
AND
CHASSIS SUPPLIED
POWER CABLES

RELAY-BATTERY
DISCONNECT
86273-02-000
NUT
D39-04-00B

PLATE ASM-SOLENOID,
MOUNTING
168591-06-CHT
BOLT
G42-04-16B (4)

CHASSIS BATTERIES
(RIGHTHAND BATTERIES SHOWN
LEFTHAND OPPOSITE)
(TAB -02)

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
BATTERY INSTL		
SHEET 3	PART NO	REV
	169369	

FUSE HOLDER
AND FUSE
(REF)

FUSE HOLDER
AND FUSE
(REF)

CABLE ASM (YEL)
(REF)

TO INVERTER
(REF)

CABLE ASM (YEL)
(REF)

TO INVERTER
(REF)

TO CHASSIS
FRAME GROUND
(REF)

CLAMP
10497-12-000 (2)
SCREW
G39-10-12U (2)

CLAMP
10497-01-000 (2)
SCREW
G39-10-12U (2)

CLAMP
10497-01-000 (2)
SCREW
G39-10-12U (2)

CLAMP
10497-12-000 (2)
SCREW
G39-10-12U (2)

TO INVERTER
(REF)

TO CHASSIS
FRAME GROUND
(REF)

COACH BATTERIES
(TOP VIEW)
(RIGHTHAND BATTERIES SHOWN
LEFTHAND OPPOSITE)
(TAB -01)

COACH BATTERIES
(TOP VIEW)
(RIGHTHAND BATTERIES SHOWN
LEFTHAND OPPOSITE)
(TAB -02)

- 3 SEE WIRING ISTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 2 ALLOW 775MM OF 1/0 ORG & 3/0 BLK CABLES AND 200MM OF 3/0 YEL & 1/0 BLK CABLES AFTER CLAMPING TO CONNECT BATTERIES.
- 1 ROUTE CABLES SO BATTERY CAPS CAN BE REMOVED FOR SERVICE. USE WIRE TIE 008343-02-000 AS SHOWN AND AS NEEDED.

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 4	PART NO 169369	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

8

7

6

5

4

3

2

1

TERMINALS

NO.	PART NUMBER	DESCRIPTION
B-1 B-2 B-11 B-12	50003-01 50004-01 50003-02 50004-02	TERMINAL-PIN, 16-14 GA,.156 DIA TERMINAL-RECP, 16-14 GA,.156 DIA TERMINAL-PIN, 16-14 GA,.180 DIA TERMINAL-RECP, 16-14 GA,.180 DIA
WP-1 WP-2 WP-3	106950-01 106950-02 106950-03	TERMINAL-PIN, 16-14 GA TERMINAL-PIN, 10-12 GA TERMINAL-PIN, 8 GA
R-1 R-2 R-3 R-4 R-5 R-6 R-7 R-8 R-9	35416-01 35416-02 35416-03 35416-04 37018-01 102777-01 102777-02 102777-03 33787-01	TERMINAL-RING, #10 STD, 8 GA TERMINAL-RING, #10 STD, 6 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, 5/16 STD, 12-10 GA TERMINAL-RING, #6 STD, 14-16 GA TERMINAL-RING, #6 STD, 10-12 GA TERMINAL-RING, #6 STD, 8 GA TERMINAL-RING, #10 STD, 14 GA
R-60 R-61 R-62 R-63 R-64 R-65 R-66 R-67 R-68 R-69 R-70 R-71	8325-01 8326-01 8327-01 8328-01 8328-02 8329-01 8331-01 8332-01 8332-02 8350-01 99275-02 101397-01	TERMINAL-RING, 1/4 STD, 14-16 GA TERMINAL-RING, 3/8 STD, 14-16 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 8 GA TERMINAL-RING, 3/8 STD, 4 GA TERMINAL-RING, 1/4 STD, 6 GA TERMINAL-RING, 1/4 STD, 10 GA TERMINAL-RING, 3/8 STD, 6 GA TERMINAL-RING, 7/16 STD, 8 GA TERMINAL-RING, #10 STD, 14-16 GA
R-91 R-92 R-93 R-94	88791-01 88791-02 8348-01 99275-01	TERMINAL-RING, 3/8, 90°, 1/0 GA TERMINAL-RING, 3/8, 90°, 2 GA TERMINAL-RING, 3/8 STD, 2 GA TERMINAL-RING, 7/16 STD, 1/0 GA
RF-51 RF-52	7944-01 7945-01	TERMINAL-SPADE, 12-10 GA, #8 STUD TERMINAL-SPADE, 18-14 GA, #8 STUD
TR-1 TR-2 TR-3 TR-11 TR-12	47443-01 47443-02 47443-05 47443-03 47443-04	TERMINAL-RECP, 16-14 GA,.25, INS TERMINAL-RECP, 12-10 GA,.25, INS TERMINAL-RECP, 22-18 GA,.25, INS TERMINAL-RECP, 16-14 GA,.19, INS TERMINAL-RECP, 16-14 GA,.11, INS
TR-21	80015-01	TERMINAL-RECP, 22-18 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-22	80015-02	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-23	80015-03	TERMINAL-RECP, 16-14 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-24	80015-04	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .020
TR-51 TR-52 TR-53 TR-54 TR-55	7940-01 23809-01 23809-02 49270-01 7940-02	TERMINAL-RECP, 16-12 GA,.25, UNINS TERMINAL-RECP, 16-14 GA,.19, UNINS TERMINAL-RECP, 18-20 GA,.25, UNINS TERMINAL-RECP, 18-20 GA,.19, UNINS TERMINAL-RECP, 10 GA, .25, UNINS
TT-1 TT-2 TT-11	85745-02 85745-03 85745-04	TERMINAL-TAB, 16-14 GA,.25, INS TERMINAL-TAB, 10-12 GA,.25, INS TERMINAL-TAB, 18-22 GA,.19, INS
TT-51 TT-52	7942-01 7943-01	TERMINAL-TAB, 16-14 GA,.25, UNINS TERMINAL-TAB, 14-10 GA,.25, UNINS
MF6-1	129236-01	TERMINAL-FEM, M/P, 630, 10-12
MF6-2	129236-02	TERMINAL-FEM, M/P, 630, 14-16

SPLICES

NO.	PART NUMBER	DESCRIPTION
BS-1 BS-2 BS-3 BS-SB	31876-01 31876-02 31876-03 100070-01	SPLICE-BUTT, 16-14 GA, BLUE SPLICE-BUTT, 12-10 GA, YELLOW SPLICE-BUTT, 22-18 GA, RED SPLICE-BUTT, 14-16 GA, SHRINK,BLUE
BS-RB	112823-01	SPLICE-BUTT, 14-22 GA, REDUCER
BS-RS	173854-01	SPLICE-BUTT, 14-22 GA, REDUCER, SHRINK
S-1 S-2	7946-01 23808-01	SPLICE, 1-6 MM ² SPLICE, 6-9 MM ²
I-2 I-5	7956-02 7956-05	SHRINK WRAP .375 DIA SHRINK WRAP .25 DIA
SH-1	58028-01	SPLICE-HAT
S-10	101173-01	SPLICE-BARREL, 26300 CMA

NO.	PART NUMBER	DESCRIPTION
SP-1	90986-02	PLUG ASM-ELECTRIC STEP
SP-2	142524-01-000 098261-01-000 098262-07-000 098261-02-000 (3) 098262-01-000 (3)	HOUSING-4 PIN SOCKET-CONNECTOR SEAL-CONNECTOR SOCKET-CONNECTOR SEAL-CONNECTOR
HR-1	63910-01	HOUSING-RELAY
MP-8 MP-10 MPP CAV-1 CON-3	125323-02 125323-01 125324-01 125325-01 98262-03	HOUSING-PIN, 8 CAVITY HOUSING-PIN, 10 CAVITY TERMINAL-MALE, M/P, 150 SEAL-CAVITY, 150-SERIES M/P SEAL-CONNECTOR
LS-8 LS-10	125323-03 125323-04	LOCK-SECONDARY 8 POSITION LOCK-SECONDARY 10 POSITION
H-8 H-12	108355-01 108355-02	HOUSING-SWITCH, 8 POSITION HOUSING-SWITCH, 12 POSITION

HOUSINGS AND TERMINALS

NO.	PART NUMBER	DESCRIPTION
HS-2 HS-3 HS-4 HS-5 HS-6 HS-7 HS-9 HS-12 HS-15 HS-2-R	88474-10 88474-09 88474-08 88474-07 88474-06 88474-05 88474-03 88474-01 88474-02 88474-12	HOUSING-SOCKET, 2 CAVITY HOUSING-SOCKET, 3 CAVITY HOUSING-SOCKET, 4 CAVITY HOUSING-SOCKET, 5 CAVITY HOUSING-SOCKET, 6 CAVITY HOUSING-SOCKET, 6 CAVITY-IN LINE HOUSING-SOCKET, 9 CAVITY HOUSING-SOCKET, 12 CAVITY HOUSING-SOCKET, 15 CAVITY HOUSING-SOCKET, 2 CAVITY-RED
HP-2 HP-3 HP-4 HP-5 HP-6 HP-7 HP-8 HP-9 HP-12 HP-15 HP-2-R HP-3-B HP-3-G HP-3-R	88473-10 88473-09 88473-08 88473-07 88473-06 88473-05 88473-04 88473-03 88473-01 88473-02 88473-15 88473-12 88473-13 88473-14	HOUSING-PIN, 2 CAVITY HOUSING-PIN, 3 CAVITY HOUSING-PIN, 4 CAVITY HOUSING-PIN, 5 CAVITY HOUSING-PIN, 6 CAVITY HOUSING-PIN, 6 CAVITY-IN LINE HOUSING-PIN, 8 CAVITY-IN LINE HOUSING-PIN, 9 CAVITY HOUSING-PIN, 12 CAVITY HOUSING-PIN, 15 CAVITY HOUSING-PIN, 2 CAVITY-RED HOUSING-PIN, 3 CAVITY-BLUE HOUSING-PIN, 3 CAVITY-GREEN HOUSING-PIN, 3 CAVITY-RED
TS-1 TS-2	88476-01 88476-02	SOCKET-CONNECTOR, 20-14 GA SOCKET-CONNECTOR, 12-10 GA
TP-1 TP-2	88475-01 88475-02	PIN-CONNECTOR, 20-14 GA PIN-CONNECTOR, 12-10 GA
HS2HA HP2HA	137208-01 137207-01	HOUSING-SOCKET, 2 CAVITY-HIGH AMP HOUSING-PIN, 2 CAVITY-HIGH AMP
TS-HA TP-HA	137210-01 137209-01	SOCKET-CONNECTOR, 10AWG HIGH AMP PIN-CONNECTOR, 10AWG HIGH AMP
H-HA	104100-01	HOUSING, 1 CAVITY 75 AMP
T-HA	104100-03	TERMINAL 10 AWG - 6 AWG 75 AMP

BALLOON CALLOUT LEGEND

110 V WIRE	TERMINALS/SPLICES	RECEPTACLES
PART NUMBER COLOR LENGTH	PART NUMBER QUANTITY	PART NUMBER CIRCUIT COLOR LOCATION
POWER CORD	CONDUIT	12 V WIRE
WIRE GUAGE LENGTH IN FEET APPROVAL/ LISTING	TYPE DIA IN 1/16" INCREMENTS LENGTH (mm)	CIRCUIT COLOR & WIRE GAUGE HOUSING POSITION/ TERMINATION

NOTES:

1

FOR RECP-BLANK, DET-X DENOTES DETAIL VIEW.

2

CONTACT WIRE PREP PRIOR TO USING FOR TOOLING PURPOSES.

8

7

6

5

4

3

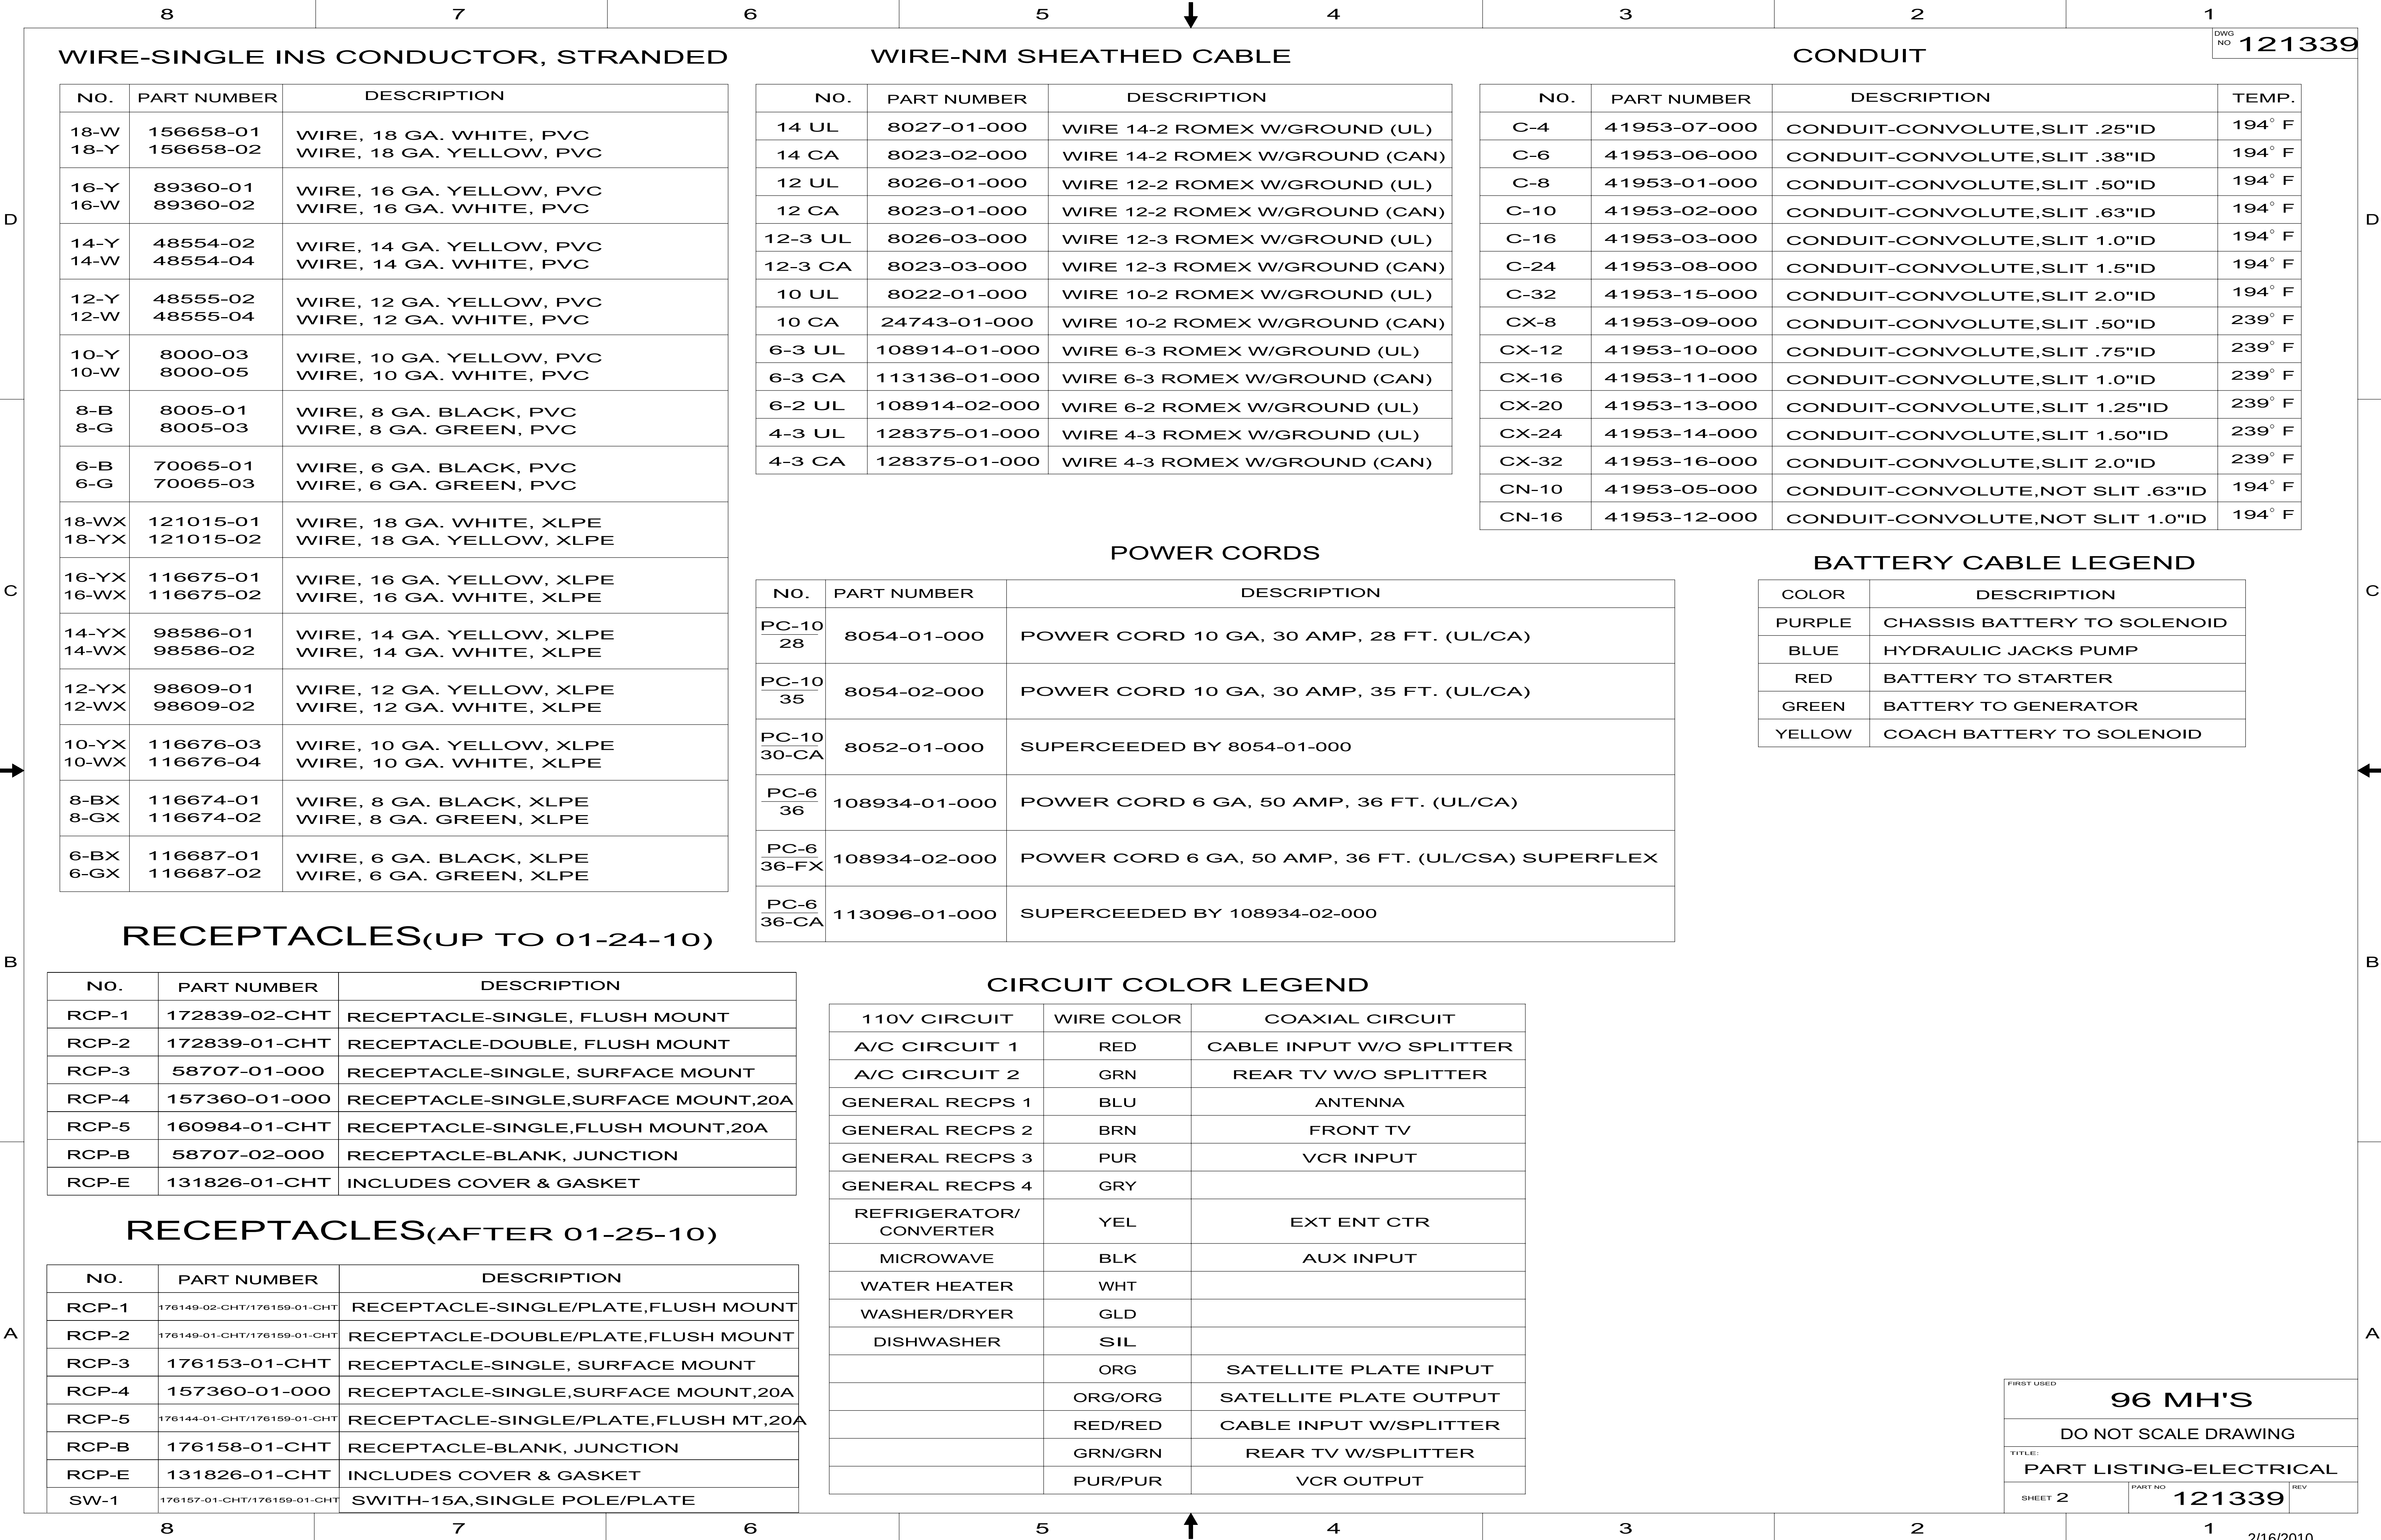
2

1

REF:

1

2/16/2010



8

7

6

5








4

3




2

1

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-1	LAMP 98024-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-1	LAMP 98024-03-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-1	LAMP 98024-05-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-1	LAMP 98024-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N1	LAMP 98024-07-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LF2N1	LAMP 98024-08-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN1	LAMP 98024-09-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,PORCH

NO	PART NUMBER	DESCRIPTION
LEXT-1	LAMP 97917-01-CHT SCREW G67-10-129 (4) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, SURFACE MOUNT BARGMAN 
LEXT-2UL	LAMP 8089-01-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED UL LIST JRV PROD 
LEXT-2CA	LAMP 8089-02-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED CAN LIST JRV PROD 
LEXT-3	LAMP 171513-01-CHT SCREW G67-10-129 (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH SURFACE MOUNT OPTRONICS

87.0

22.2 R

96

CUT OUT IN PANEL

HALOGEN LAMP

LINE SPRING CLIPS UP WITH RELIEF IN CUT OUT

DETAIL CA

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

XXXXXX

XX

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 3





PART NO121339

REV





DWG NO121339

2/16/2010

LAMP ASM-PACKAGE,PANCAKE

NO	PART NUMBER	DESCRIPTION
LF1-2	LAMP 137417-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-2	LAMP 137417-04-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-2	LAMP 137417-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-2	LAMP 137417-05-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N2	LAMP 137417-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN2	LAMP 137417-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,HALOGEN

NO	PART NUMBER	DESCRIPTION
HAL	LAMP 123775-01-CHT SCREW (SUPPLIED) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING 1 BULB 
HAL-S	LAMP 123775-01-CHT SPACER 123775-02-CHT SCREW G13-06-16U (3) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING WITH 3/4" SPACER 1 BULB 
HAL-2	LIGHT-HAL,ROUND 165170-01-CHT SCREW G13-06-12B (2) CONNECTOR 58028-01-000 (2)	LIGHT-HALOGEN, ROUND 3" 
HAL-4	LIGHT-HAL,ROUND 165643-01-CHT SCREW G13-05-16B (3) CONNECTOR 58028-01-000 (2) (SEE DETAIL CA)	LIGHT-HALOGEN, ROUND 4.5" 

8

7

6



























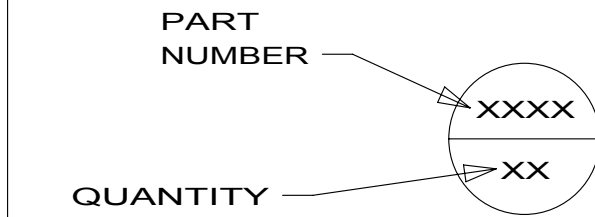

5







4


3


2




1




8			7			6			5			4			3			2			1																																																																																									
LAMP ASM-PACKAGE,FLUORESCENT																		LAMP ASM-PACKAGE,MAKEUP LAMP																		LAMP ASM-PACKAGE,OTHER																		LAMP ASM-PACKAGE,PANCAKE																		DWG NO 121339																																						
NO		PART NUMBER				DESCRIPTION												NO		PART NUMBER				DESCRIPTION												NO		PART NUMBER				DESCRIPTION																																																																				
FLU-1		LAMP 91936-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH THIN-LITE 												LMU3-1		LAMP 110235-01-CHT SCREW W/SPACER (SUPPLIED) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB (SUPPLIED) PROGRESSIVE DYNAMICS 												LSH-1		LAMP 121935-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-SHOWER PROGRESSIVE DYNAMICS INC. 												LF1-3		LAMP 170693-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH GUSTAFSON 																																																		
FLU-2		LAMP 91936-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/SWITCH THIN-LITE 												LMM3-2		LAMP 123774-03-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 3 BULB GUSTOFSON 												LSH-2		LAMP 164039-01-CHT SCREW G11-08-16U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER 												LF2-3		LAMP 170693-04-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH GUSTAFSON 																																																		
FLU-3		LAMP 127327-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 1-12" BULB W/SWITCH THIN-LITE 												LMU3-2		LAMP 138116-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 												LSH-3		LAMP 164040-01-CHT SCREW G13-07-12U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER GLASS 												LO1-3		LAMP 170693-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH GUSTAFSON 																																																		
FLU-4		LAMP 130338-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT W/SWITCH THIN-LITE 												LMU3-3		LAMP 162446-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 												LCR-1		LAMP 61424-01-000 SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE RAMCO (RECTANGULAR) 												L02-3		LAMP 170693-05-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH GUSTAFSON 																																																		
FLU-5		LAMP 153464-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336												LMU4-1		LAMP 110235-02-CHT SCREW G11-08-16U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB PROGRESSIVE DYNAMICS 												LCS-1		LAMP 108354-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE ITC MARINE (SQUARE) 												LF1N3		LAMP 170693-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH GUSTAFSON 																																																		
FLU-6		LAMP 130338-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT WARM WHITE BULB W/SWITCH THIN-LITE 												LMU4-2		LAMP 138116-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 												READ-1		LIGHT-READING 132427-01-CHT SCREW SUPPLIED W/ LIGHT CLIP-U 141395-02-CHT (2) CONNECTOR 58028-01-000 (2)				LIGHT-READING,SWIVEL,ROUND 1 BULB 												LFSN3		LAMP 170693-06-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH GUSTAFSON 																																																		
FLU-7		LAMP 153464-05-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336												LMU4-3		LAMP 162446-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 												READ-2		LIGHT-READING 128786-02-CHT SCREW G11-08-16J (2) BULB 123917-01-000 CONNECTOR 58028-01-000 (2)				LIGHT,READING,SWIVEL 												LOS3		LAMP 170693-07-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 2 BULB W/O SWITCH GUSTAFSON 																																																		
FLU-8		LAMP 173072-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" ONE 8 WATT BULB W/SWITCH OPTRONICS 												LMM4-2		LAMP 123774-01-CHT SCREW G11-08-16U (2) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 4 BULB GUSTOFSON 												READ-3		LIGHT-READING 170833-01-CHT SCREW SUPPLIED W/LIGHT CONNECTOR 58028-01-000 (2)				LIGHT,READING,HAL 												LO1N3		LAMP 170693-08-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 1 BULB W/O SWITCH GUSTAFSON 																																																		
FLUN1		LAMP 91936-04-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH THIN-LITE 																																																																																																								
FLUN2		LAMP 91936-03-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH THIN-LITE 																																																																																																								
FLUN3		LAMP 153464-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336																																																																																																								
FLUN4		LAMP 153464-03-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 480																																																																																																								
FLUN5		LAMP 153464-06-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 480																																																																																																								
FLUN6		LAMP 153464-04-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336																																																																																																								
																																				LEGEND																																																																										
																																																																																																														

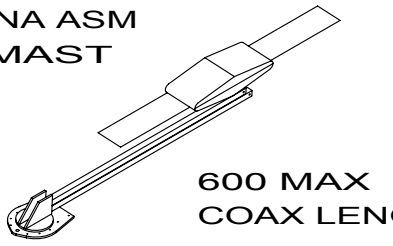


ANTENNA ASM-PACKAGE		
NO	PART NUMBER	DESCRIPTION
ANT-1	ANTENNA 76319-24-000 HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) CLIP 80734-02-000	ROOF MOUNT TV ANTENNA ASM 25.5" MAST  600 MAX COAX LENGTH
ANT-2	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANT-2W	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA WEDGE 76319-26-000	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH
ANTA-1	ANTENNA 158270-01-CHT BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-WINGMAN, ACCESSORY 173519-03-CHT	ROOF MOUNT TV ANTENNA ASM AUTOMATIC  600 MAX COAX LENGTH
ANT-3	ANTENNA-TV ROOF MNT.ROUND 167632-01-CHT PLATE-ROOF, CABLE ENTRY 146488-01-000 SCREW G67-10-129 (10) CABLE ASM-COAX 87105-01-006 ADAPTER 82134-01-000	ROOF MOUNT OMNI- DIRECTIONAL ANTENNA MOUNTING SCREWS SUPPLIED WITH ANTENNA 
ANT-4	ANTENNA 173519-01-CHT HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-HANDLE EXTENSION 173519-02-CHT	ROOF MOUNT TV ANTENNA ASM 44.5" MAST  600 MAX COAX LENGTH

SENSORS		
NO	PART NUMBER	DESCRIPTION
LPGD	LP GAS DETECTOR 150138-03-CHT SCREW G68-06-10U (2)	DETECTOR-LP GAS 

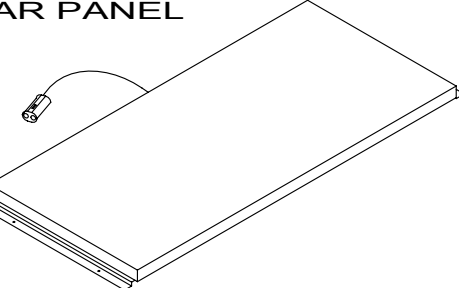PANELS		
NO	PART NUMBER	DESCRIPTION
SOLAR	PANEL-SOLAR 10 WATT 151647-01-000 SCREW G11-08-12U (4)	SOLAR PANEL 

ANTENNA ASM-PACKAGE		
ANTEXT-1	CABLE ASM-EXTENS 77069-02-000	RADIO ANTENNA CABLE EXTENSION 2400MM USABLE LENGTH 
ANTKIT-1	ADAPTER-PLATE 76319-06-000 SCREW G11-08-08T (6) CLIP-WIRE 80734-02-000 SCREW G11-08-08T	PLATE ASM-ADAPTERS CABLE ROOF MOUNTING PLATE W/ CABLE-CABLE ADAPTER, FITTINGS, AND CABLE RETAINING CLIP 
ANT-R	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT ANTENNA 109889-04-000 BRACKET-ANTENNA GROUND 147741-01-CHT	ROOF MOUNT RADIO ANTENNA 
ANTEXT-2	CABLE ASM-EXTENS 77069-03-000	RADIO ANTENNA CABLE EXTENSION 6600 MM USABLE LENGTH
ANT-A	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT 76 MM 171825-01-000 (2) BRACKET-GROUND 147741-01-CHT NUT OMD01K-06-000 (2)	ROOF MOUNT RADIO ANTENNA THICK ROOF

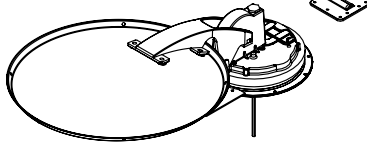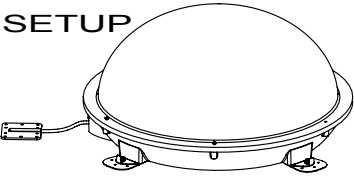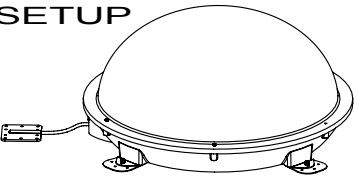SATELLITE DISH INSTL		
NO	PART NUMBER	DESCRIPTION
DM-1	SATELLITE DISH 137135-02-000 SCREW G67-10-12B (8) PLATE & BRACKET (SUPPLIED) SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 
DA-1	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-1	SATELLITE DISH 154474-04-CHT SCREW G39-10-12B (12) PLATE 146488-01-000 SCREW G67-10-12B (10)	SATELLITE DISH ANTENNA ASM IN MOTION SETUP 

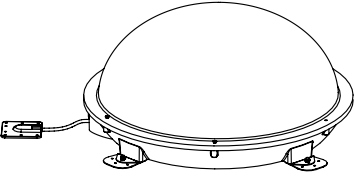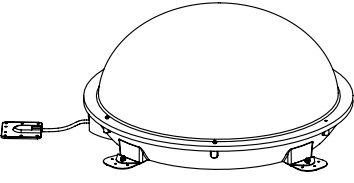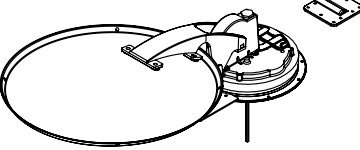SATELLITE DISH INSTL		
NO	PART NUMBER	DESCRIPTION
DA-2	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DI-2	SATELLITE DISH 154474-04-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP 
DM-2	SATELLITE DISH 137135-05-000 PLATE-ROOF,ENTRY (SUPPLIED WITH SATELLITE DISH) SCREW G67-10-12U (8) (FOR ROOF PLATE) SCREW G67-10-12U (10) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM MANUAL SETUP 

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

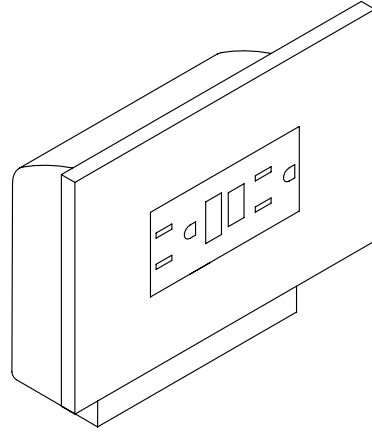
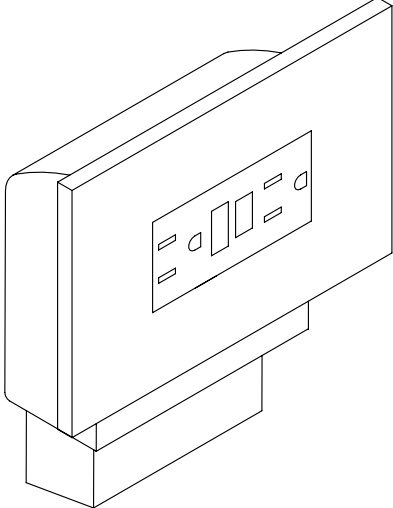
XXXXXX

XX



87654321

DWG NO121339






RECEPTACLE PACKAGE-GFI

NO	PART NUMBER	DESCRIPTION
<u>GFI</u> US	RECEPTACLE 163319-01-CHT BOX 91910-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI</u> CAN	RECEPTACLE 163319-01-CHT BOX 91910-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

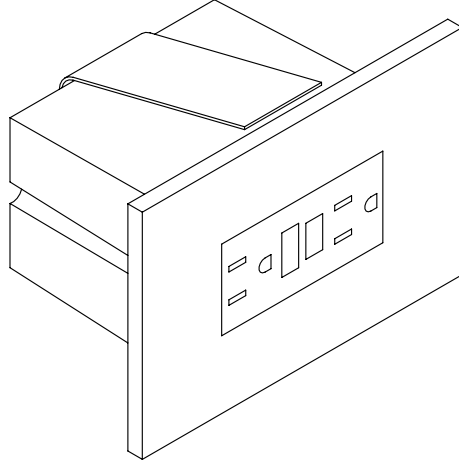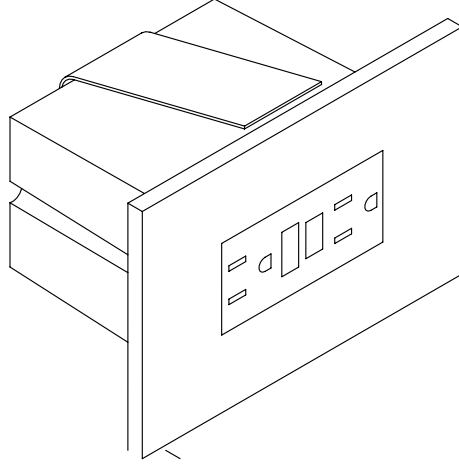RECEPTACLE PACKAGE-GFI


NO	PART NUMBER	DESCRIPTION
<u>GFI-1</u> US	RECEPTACLE 163319-01-CHT BOX 133070-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI-1</u> CAN	RECEPTACLE 163319-01-CHT BOX 133070-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

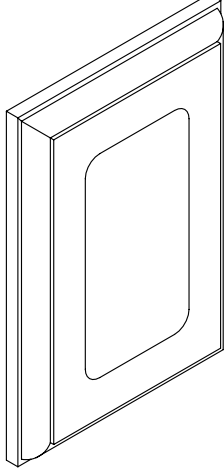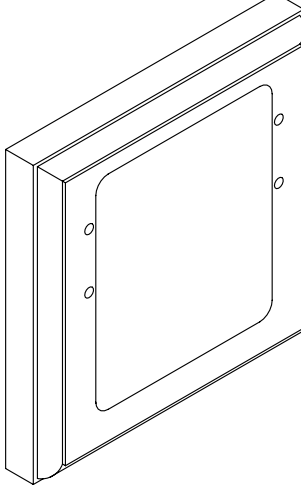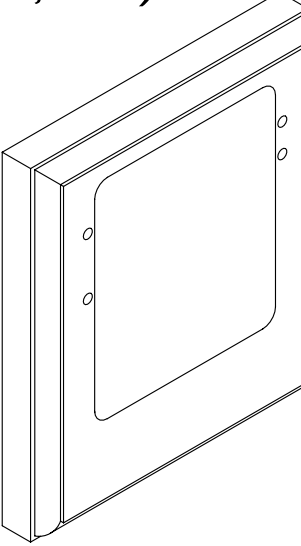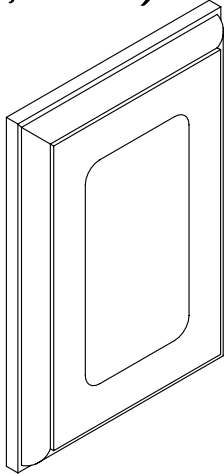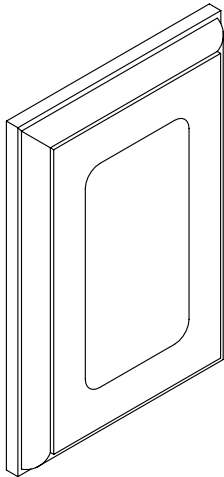SPACERS

NO	PART NUMBER	DESCRIPTION
SP-01	SPACER 102568-01-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,OG) 
SP-02	SPACER 102568-02-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (US) (WOOD,VYL RAP,OG) 
SP-03	SPACER 102568-03-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (CANADA) (WOOD,VYL RAP,OG) 
SP-04	SPACER 133713-01-CHT	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,BEV) 
SP-05	SPACER 133713-20-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,BEV) 

SP-21

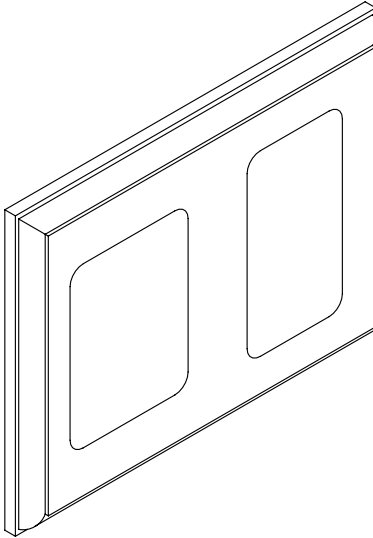SPACER
126052-01-XXX

WOOD SPACER FOR 1 - 110V
RECEPTACLE AND 1 - REAR TV
(12V) JACK
(WOOD,BEV)


LEGEND

MISC.	SPACER
PART NUMBER LISTING XXXX XXX	XXXX PART NUMBER

NOTES:

1

APPLY TUBING TO BARE GROUND WIRES.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 6

PART NO121339

REV

2/16/2010

87654321

D

C


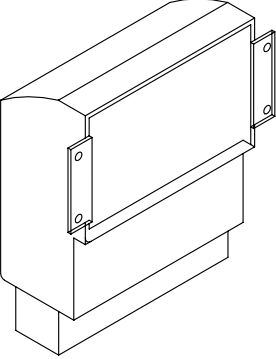
B

A


1

DWG NO121339


PREP-A/C, RECESSED (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP A/C-US	BOX 91910-02-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). US APPLICATION (RECESSED IN ROOF) 
PREP A/C-CAN	BOX 91910-01-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). CANADA APPLICATION (RECESSED IN ROOF) 

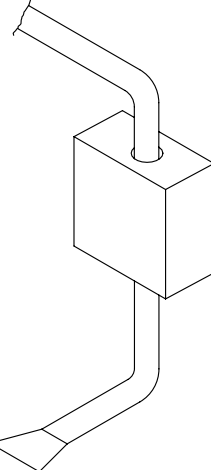
CONNECTION BOX-POWER CORD

NO	PART NUMBER	DESCRIPTION
J-PC 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 CONNECTOR 8314-01-000 (3) CONNECTOR 8356-02-000 CONNECTOR (PC) 8355-01-000	CONNECTION BOX IN POWER CORD COMPT FOR POWER CORD (US & CA APPLICATION) 
J-PC 30-US		
J-PC 30-CA		

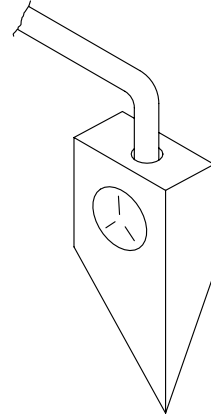
CONNECTION BOX-GENERATOR RECEPTACLE

NO	PART NUMBER	DESCRIPTION
J-RCP 30	BOX 8289-01-000 RECEPTACLE 24924-02-000 COVER 69238-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 133678-04-000 CONNECTOR 8314-01-000 TUBING-VINYL 8041-02-000 (150MM)	CONNECTION BOX IN POWER CORD COMPT FOR THE GENERATOR RECEPTACLE (US & CA APPLICATION) 
J-RCP 30-US		
J-RCP 30-CA		

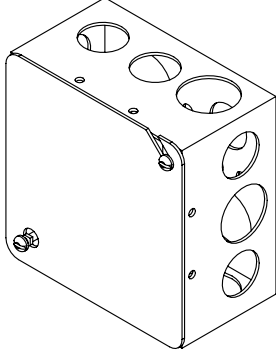CONNECTION BOX, GENERATOR SERVICE FEED

NO	PART NUMBER	DESCRIPTION
J-GEN 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 WIRE NUT-GREY 8314-01-000 (3) CONNECTOR-WIRE 8356-01-000	BOX AND EQUIPMENT USED FOR CONNECTING THE GENERATOR LEADS TO THE SERVICE ENTRANCE WIRES (US & CA APPLICATION) 
J-GEN 30-US		
J-GEN 30-CA		

PREP-A/C, SURFACE (W/OUT FACTORY A/C)

NO	PART NUMBER	DESCRIPTION
PREP SURF	BOX 93603-01-000 COVER 53337-01-000 LABEL 91243-01-000 WIRE-BONDING 8019-01-000 SCREW G11-08-12B (2) TERMINAL 8328-01-000 CONNECTOR 8313-01-000 (2) CONNECTOR 8311-01-000	SURFACE MOUNT, US AND CANADA, BOX AND EQUIPMENT FOR A/C PREP (W/OUT FACTORY A/C). TYPICALLY LOCATED ON OVERHEAD CABINET INNER WALL OR ON CEILING. 

LEGEND

PART NUMBER

LISTING

XXXX

XX

NOTES:

1 APPLY TUBING TO BARE GROUND WIRES.

96 MH'S

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL

SHEET 7PART NO121339REV

87654321

↑

121339

2/16/2010

WIRE ASM-CLEARANCE LAMPS
126486-04-000

LAMP ASM-CLEARANCE,AMBER
138996-01-000 (5)
BRACKET-LAMP CLEARANCE
138996-03-000 (5)
SCREW
G39-08-16T (10)

TO WIRE ASM-IP,MAIN

HEADLAMP ASM-HIGH
146527-02-000 (2)
SCREW
G11-08-06B (8)

HEADLAMP ASM-LOW
146527-01-000 (2)
SCREW
G11-08-06B (8)

HEADLAMP ASM-PARK/TURN
146560-01-000 (2)
BULB
112708-02-000 (2)
NUT
76327-01-000 (6)

WIRE ASM-HEADLAMP,RIGHT
146086-10-000

SUPPORT ASM-HEADLAMP
152430-01-000
152430-02-000
BOLT
C26-04-08B (8)

TO WIRE ASM-IP,MAIN

TO AIR TANK VALVE

WIRE ASM-HEADLAMP,LEFT
146086-09-000

LAMP ASM-FOG
151421-01-000 (2)
BOLT
C26-14-18B (4)
NUT
D39-04-00B (4)
ANGLE-MOUNT
139686-01-CHT
(2)
BOLT
C26-04-18B (4)

WIN

HEADLAMP ASM-PARK/TURN
153171-01-000
BOLT
C26-06-12U (3)

WIRE ASM-HEADLAMP
146086-12-000

LAMP ASM-FOG,RIGHT
153193-01-000

ITA

TO WIRE ASM-IP,MAIN

TO AIR TANK VALVE

HEADLAMP ASM-PARK/TURN
153171-02-000
BOLT
C26-06-12U (3)

WIRE ASM-HEADLAMP
146086-11-000

LAMP ASM-FOG,LEFT
153193-02-000

ITA ITASCA ONLY

WIN WINNEBAGO ONLY

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

10 R-SERIES

DO NOT SCALE DRAWING

TITLE:

WIRING INSTL-EXTERIOR LAMPS

SHEET 2

PART NO

170349

REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

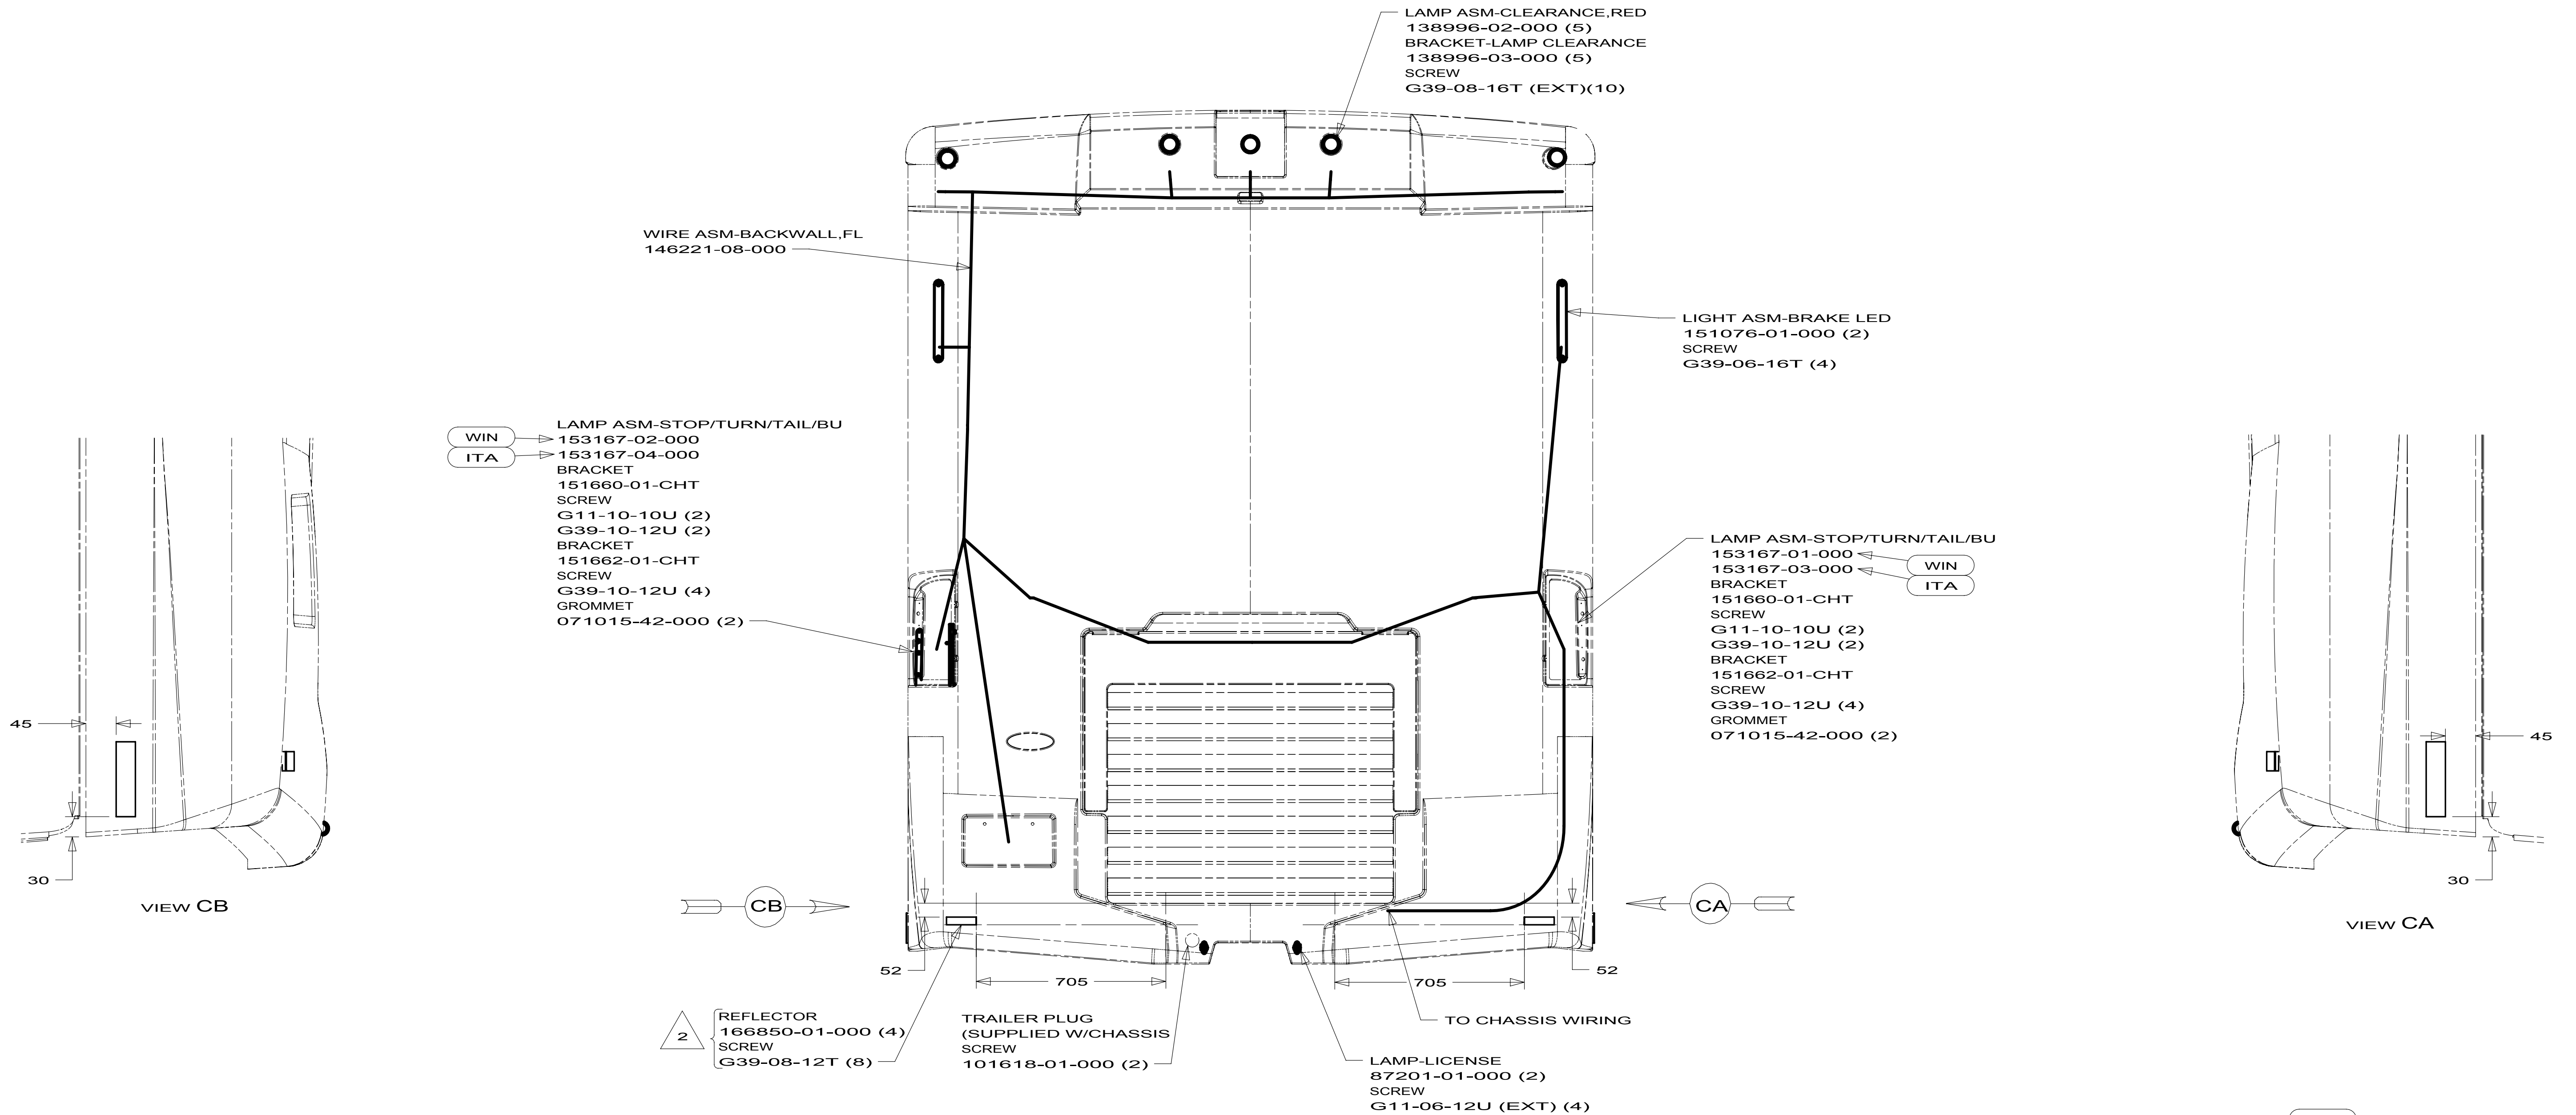
FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

X-X

2 THE 2 PIN HOUSING WITH CIRCUITS NB & DDM, FOR THE RIGHT SIDE, AND NB & DDL FOR THE LEFT SIDE IS TO BE PLUGGED INTO THE INBOARD HIGH BEAM HEADLAMP.

1 THE 2 PIN HOUSING WITH CIRCUITS NA & DDM, FOR THE RIGHT SIDE, AND NA & DDL FOR THE LEFT SIDE IS TO BE PLUGGED INTO THE OUTBOARD LOW BEAM HEADLAMP.

NOTES:



- | | |
|-----|---------------------------|
| 240 | TRAILER HITCH |
| ITA | ITASCA ONLY |
| WIN | WINNEBAGO ONLY |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |

1B1		265	
FIRST USED			
10 R-SERIES			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-EXTERIOR LAMPS			
SHEET 3		PART NO	REV
170349			

2 REMOVE PAPER BACKING FROM REFLECTOR AND PREP APPLICATION SURFACE WITH ISOPROPYL ALCOHOL WIPE BEFORE INSTALLATION.

1. CONNECTOR-PLUG,TRAILER (146246-01-000)
TO BE SUPPLIED IN COACH WITH 240

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

KEY	PART NUMBER	U/M	DESCRIPTION
	097917-01-700	EA	LENS-LIGHT, CLEAR

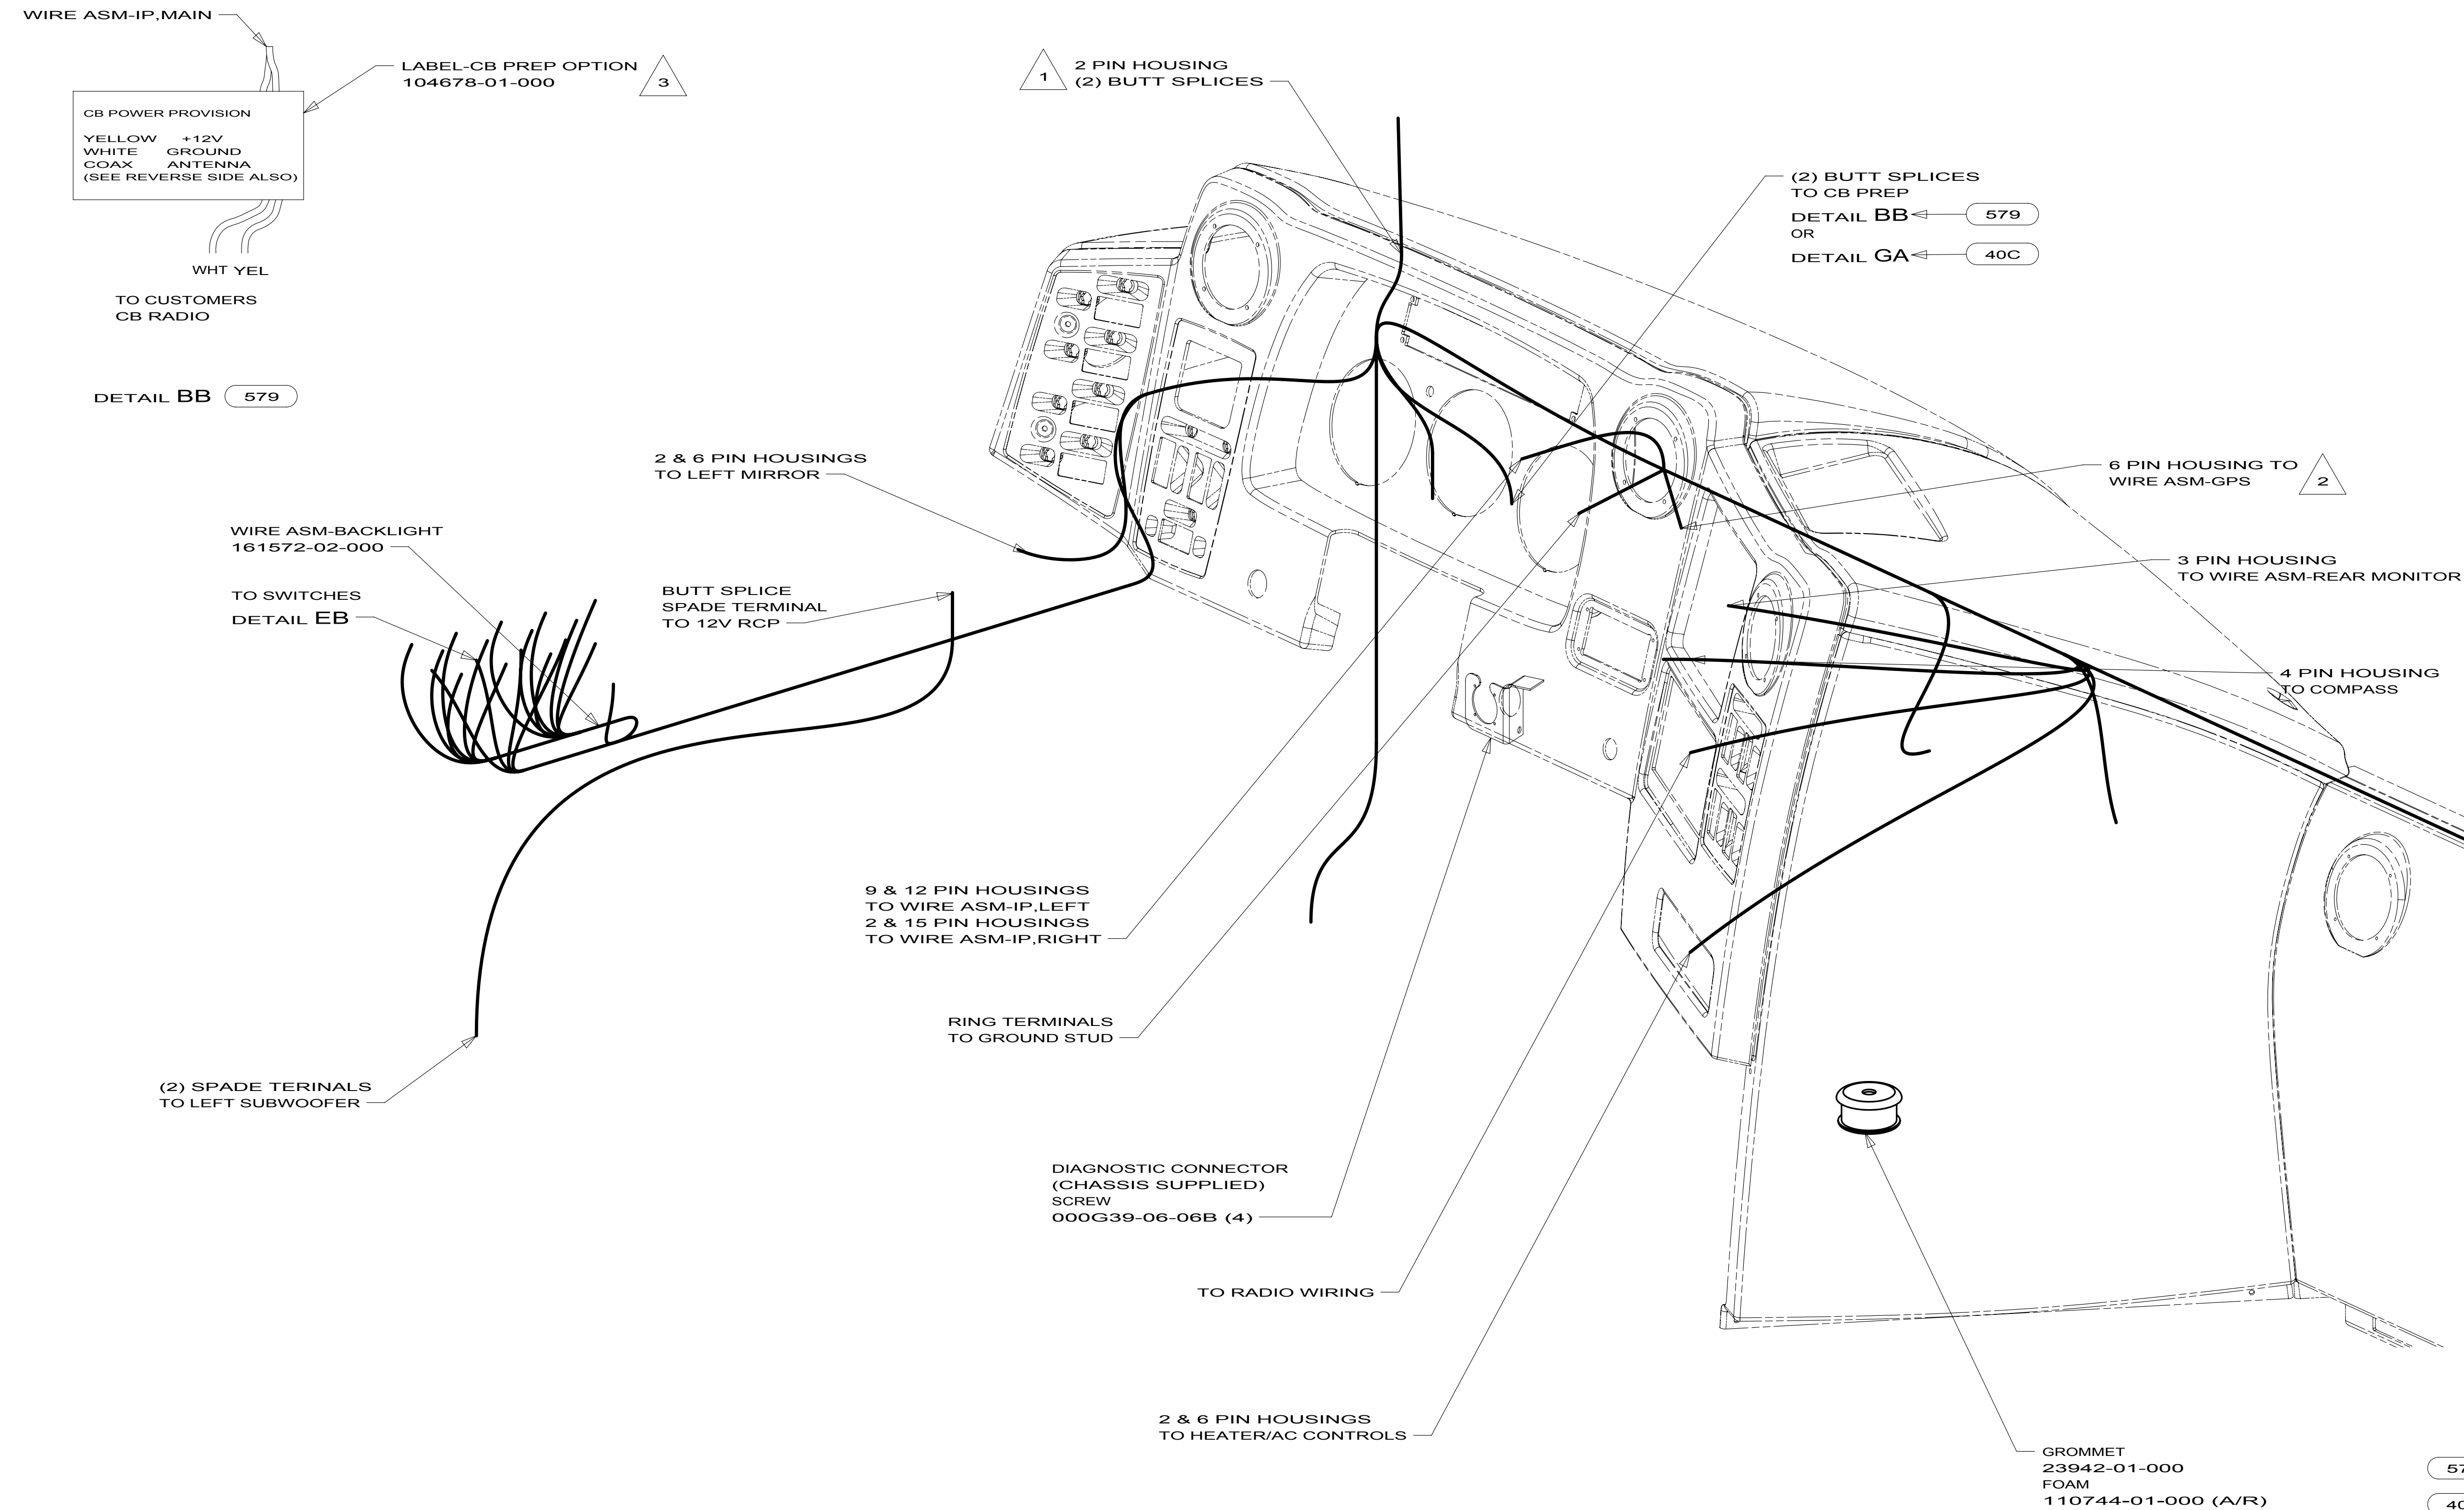097917-01-08A/09A
VENDOR NO.
30-78-021






579	RADIO - CB WIRE PREP
40C	RADIO - CB
15D	GPS-NAVIGATION SYSTEM
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA

1B1		265	
FIRST USED			
10 R-SERIES			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-FRONT END			
SHEET 2		PART NO	REV
		169937	

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

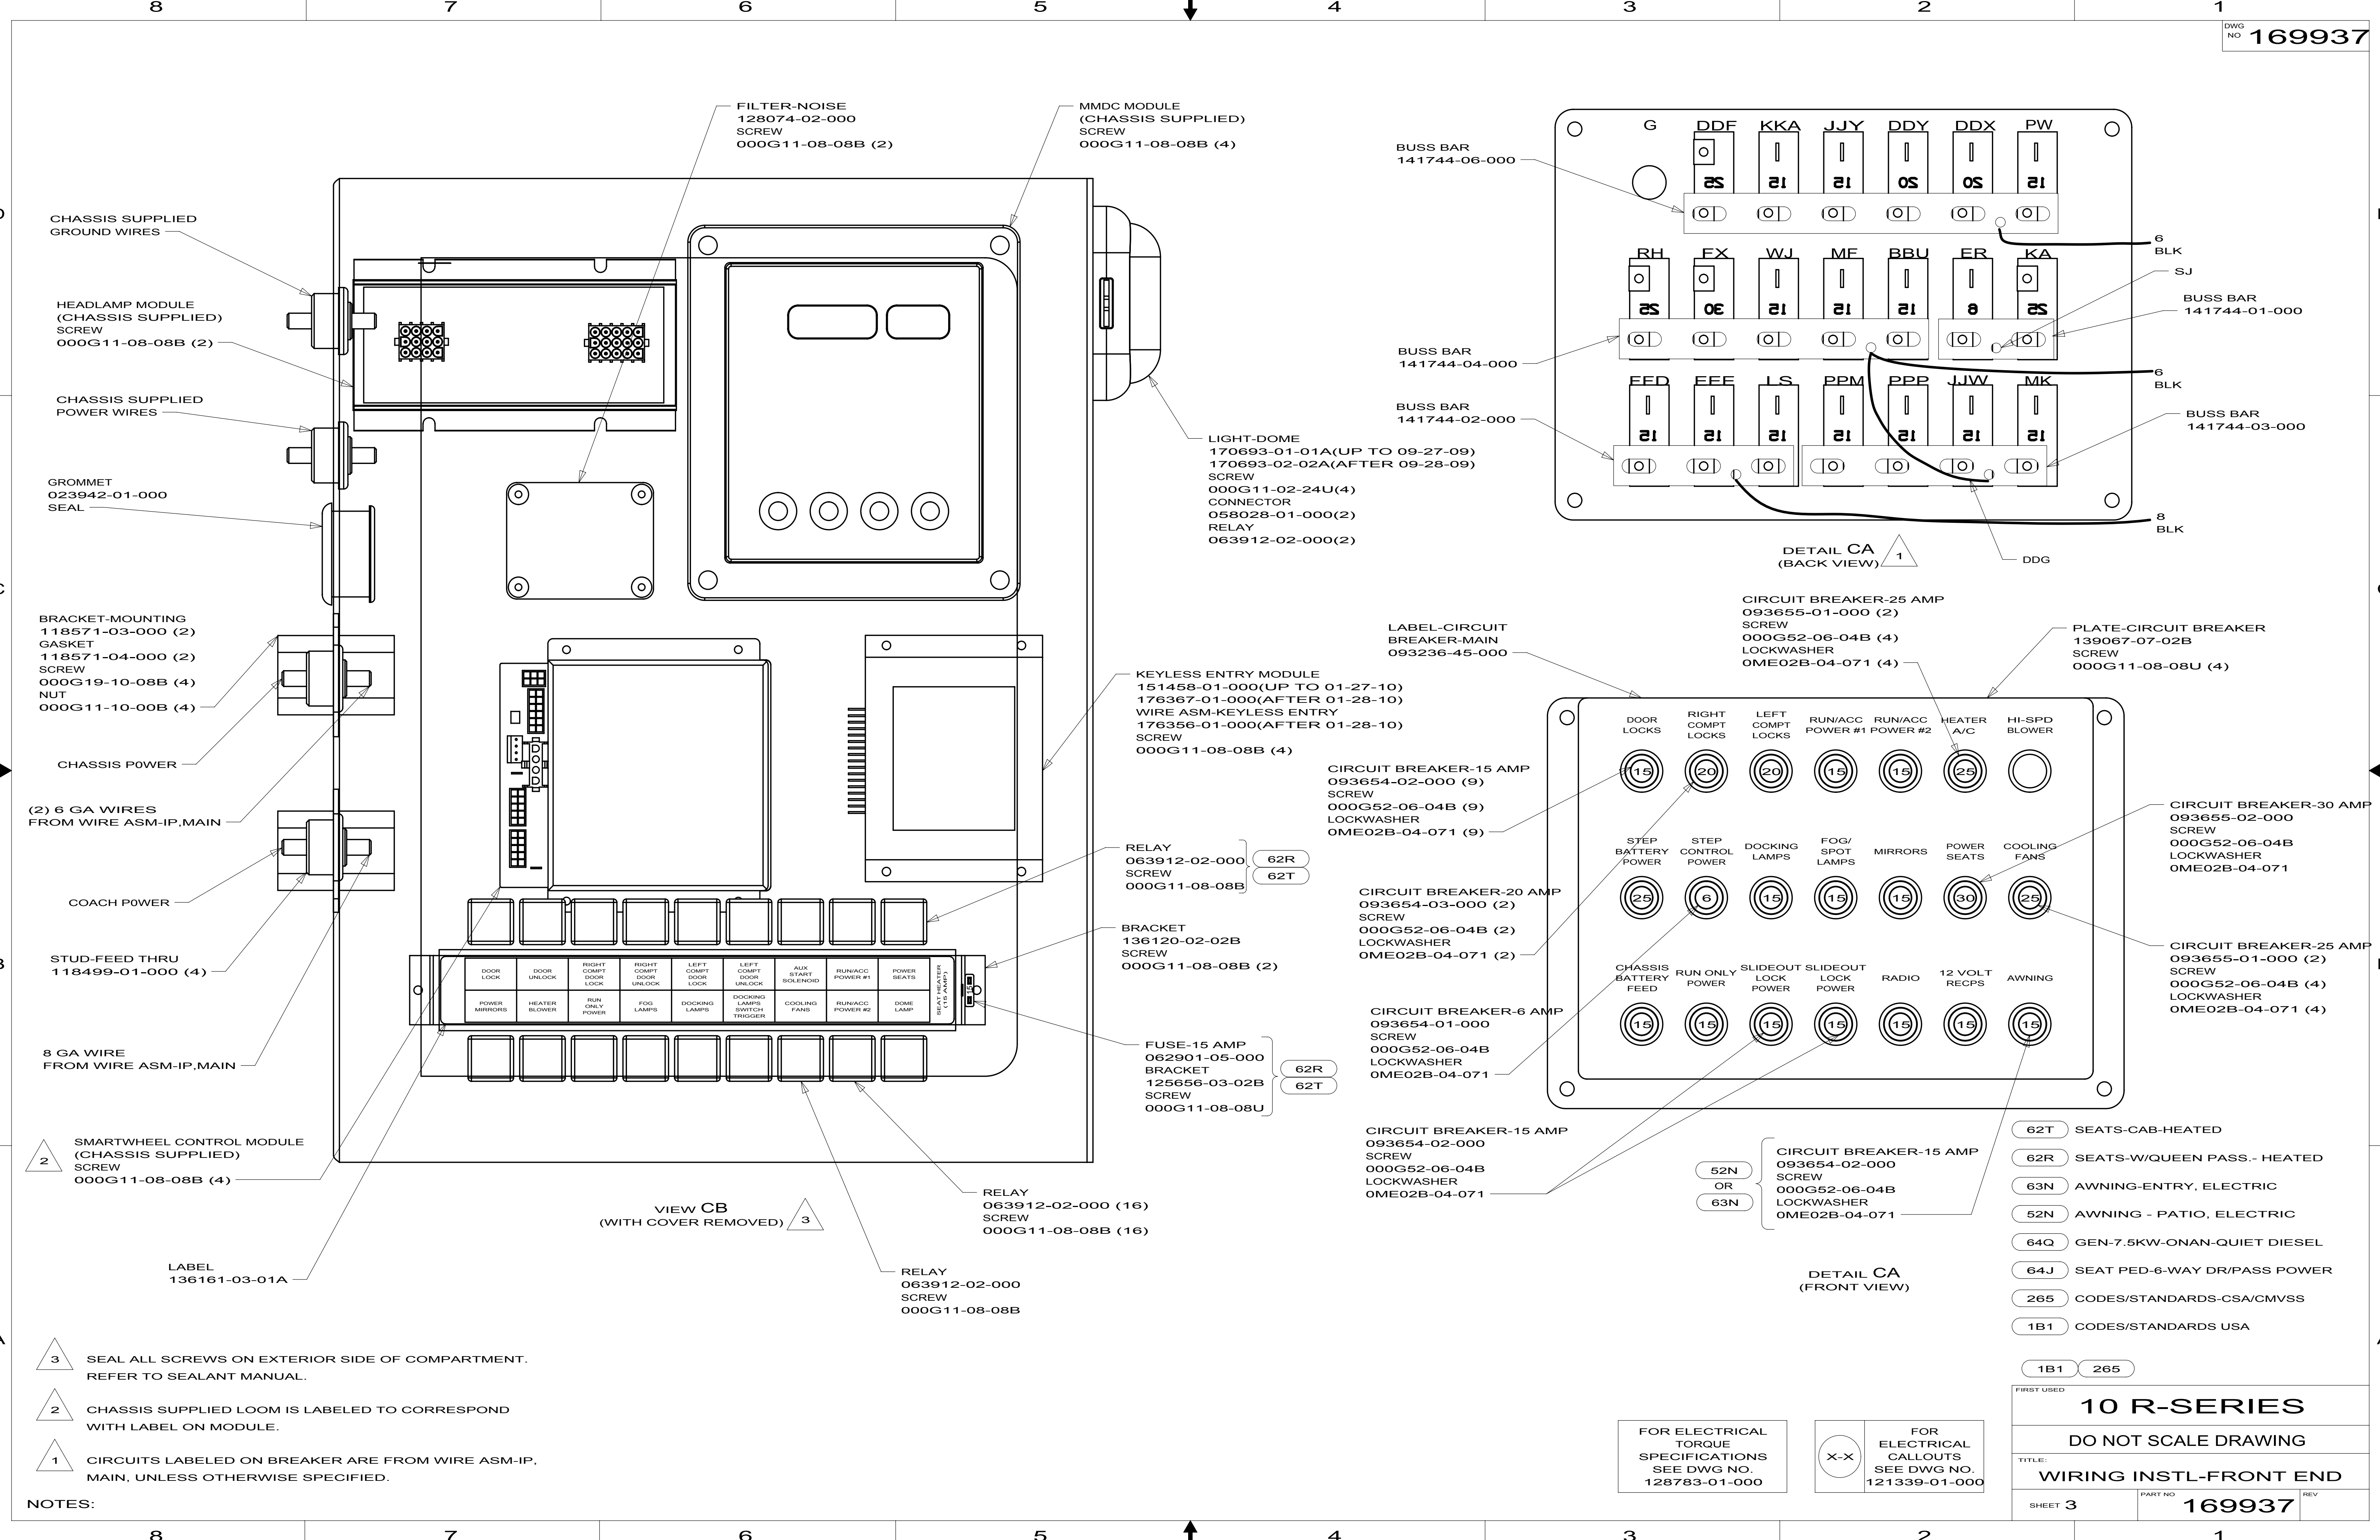- 3 EDGE OF LABEL TO HANG JUST BELOW BOTTOM OF DASH.
- 2 SEE WIRING INSTL-GPS FOR ADDITIONAL INFORMATION.
TIE BACK INTO MAIN LOOM WITHOUT 15D
- 1 ROUTE WIRES UP LEFT A-PILLAR.



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

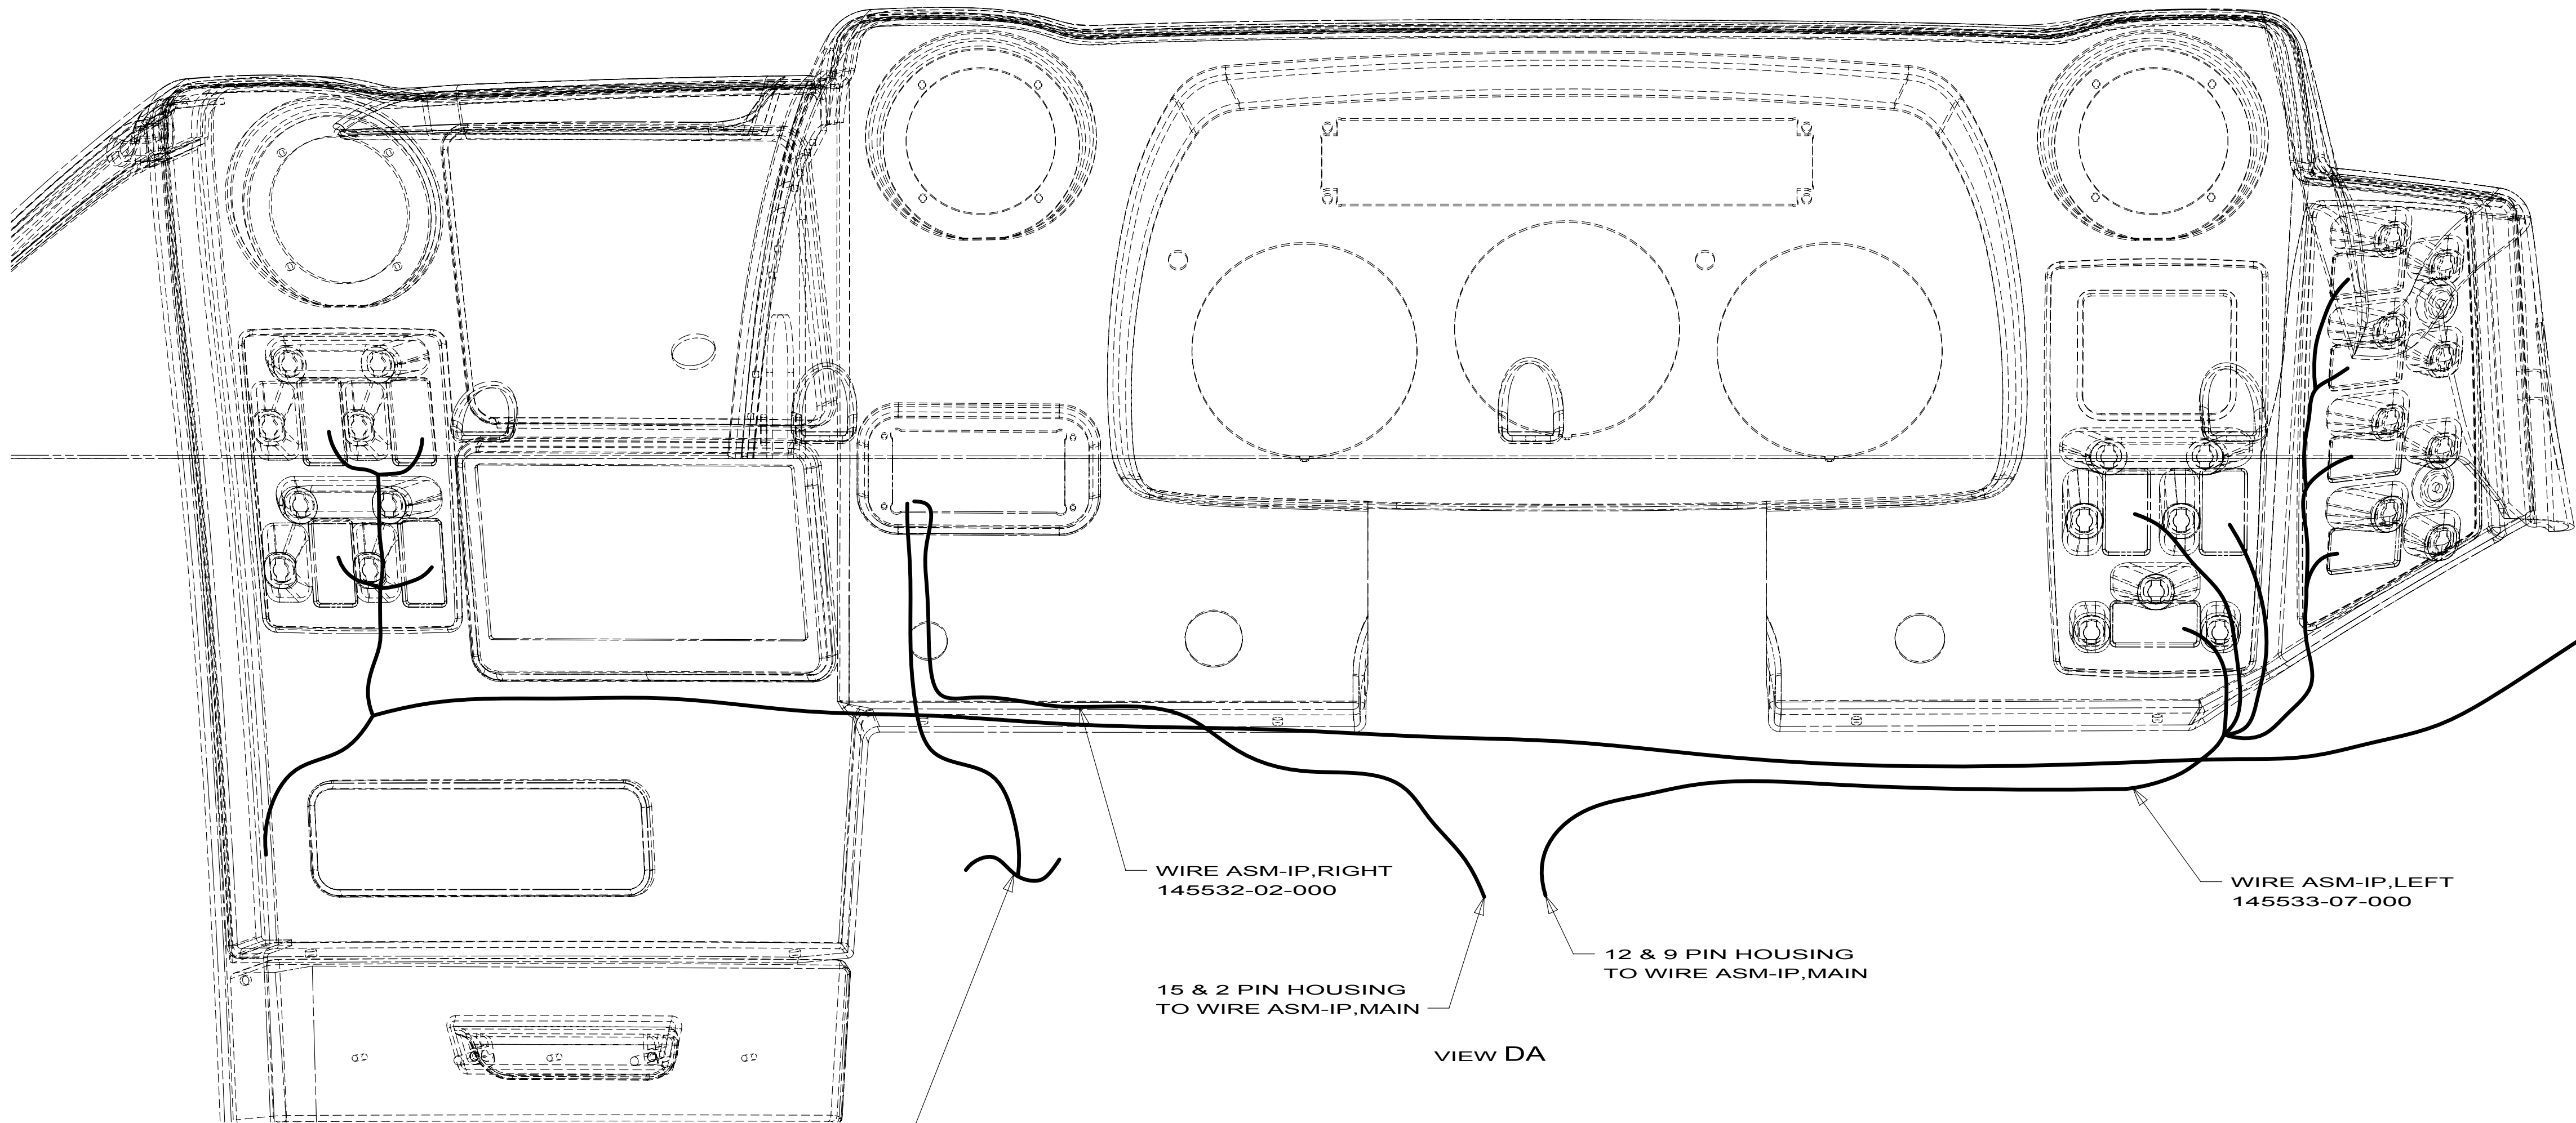FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000



- 2 ROUTE OUT FRONT END W/WIRE ASM-IP,MAIN.
- 1 ROUTE UP LEFT A-PILLAR.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

10 R-SERIES

DO NOT SCALE DRAWING


TITLE: WIRING INSTL-FRONT END

SHEET 4

PART NO



169937

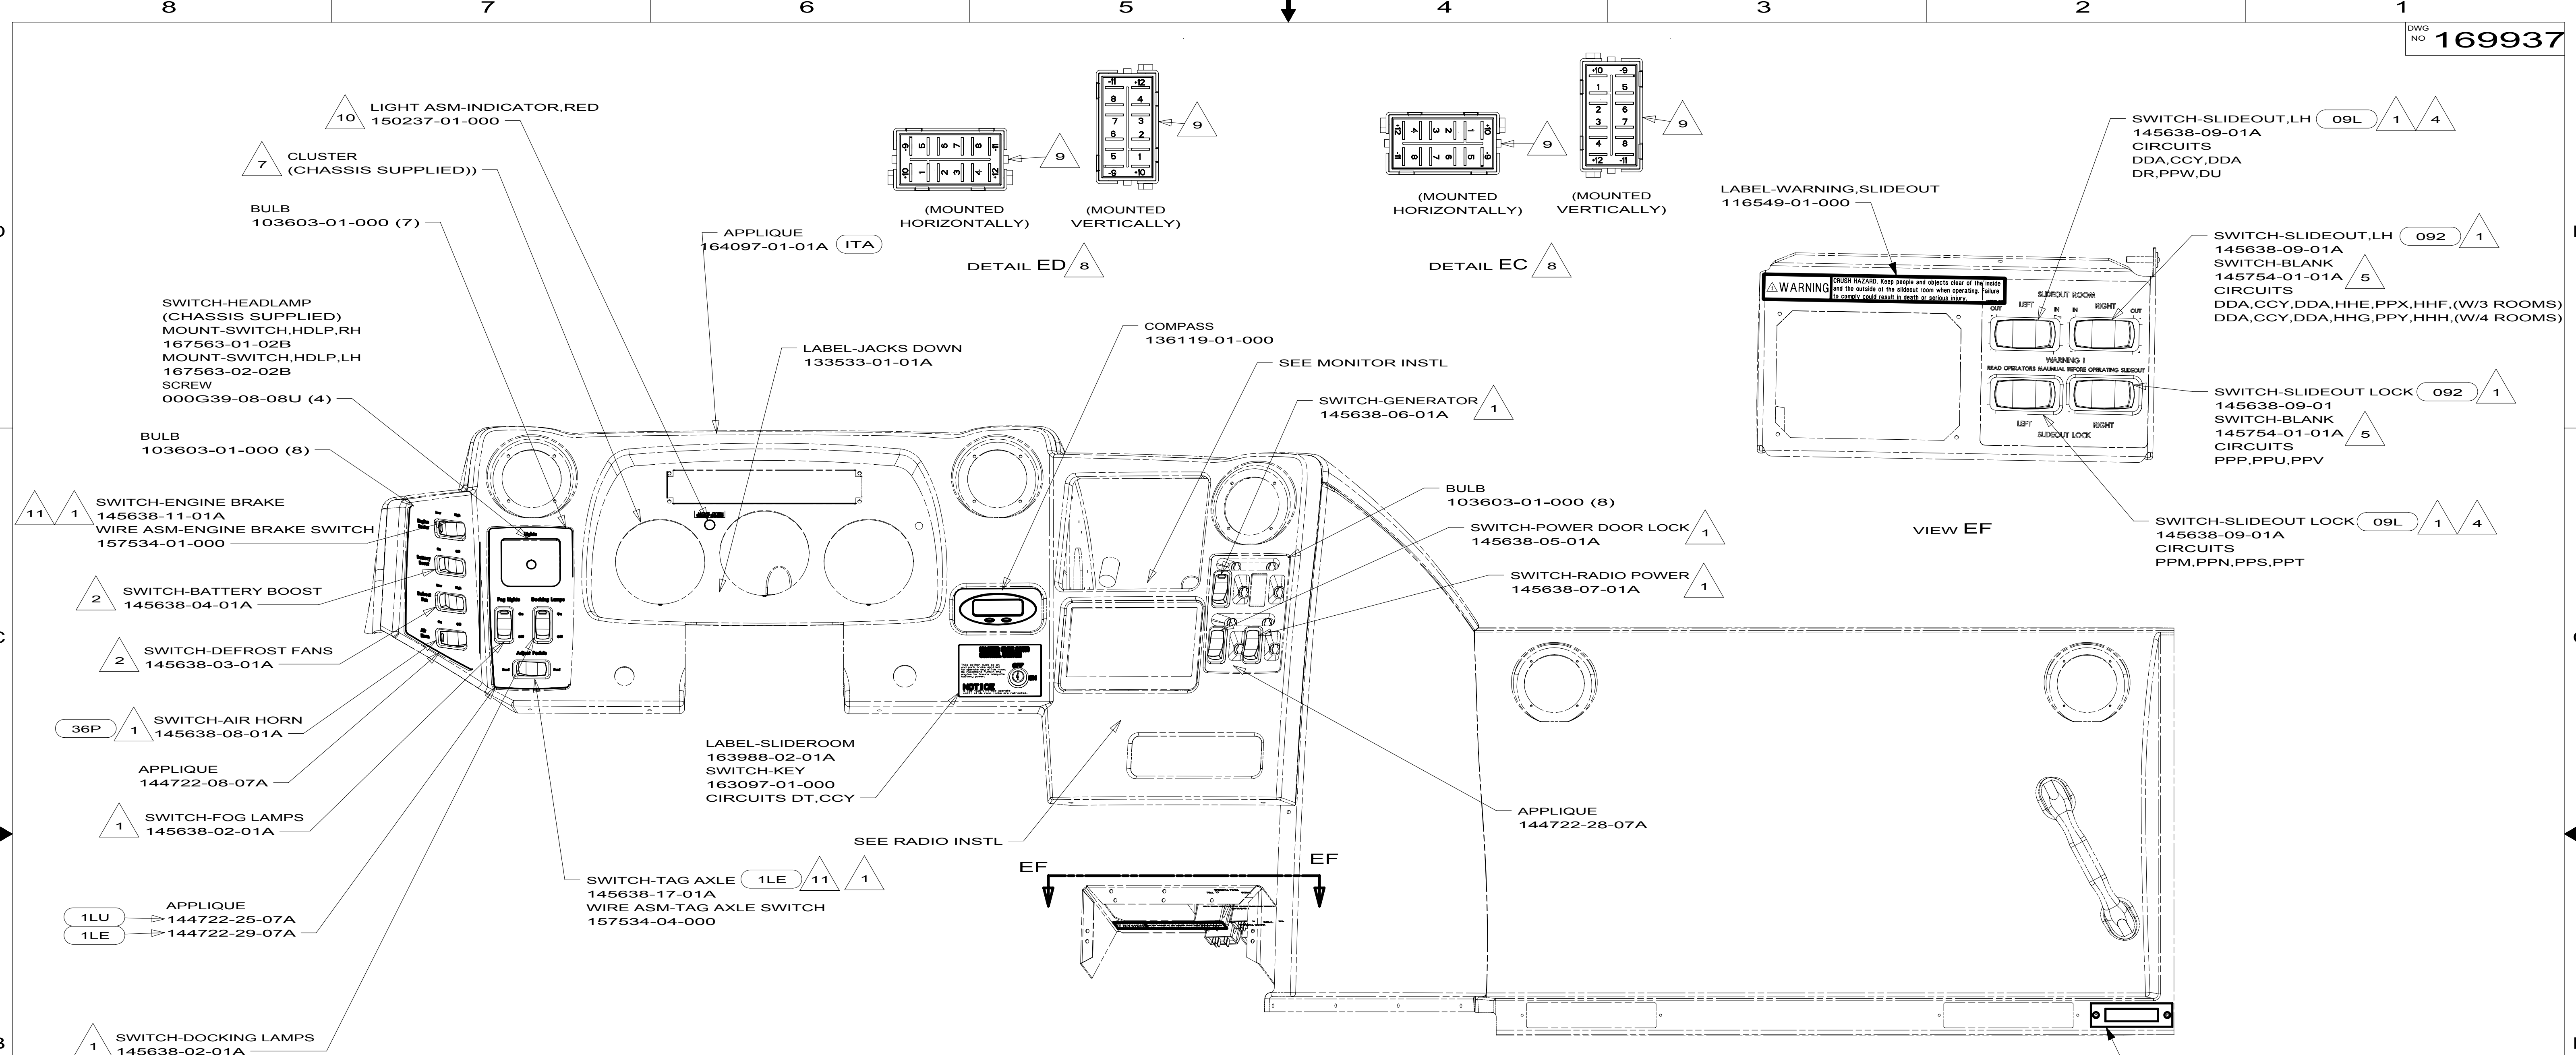REV



- 11 CONNECT TO MATING LABELED CONNECTOR ON CHASSIS SUPPLIED WIRING.
- 10 CONNECT POSITIVE WIRE TO TERMINAL MARKED WITH A "+", YEL-WINNEBAGO WIRING RED-HWH WIRING
- 9 WITH SWITCH INSTALLED, THIS SIDE OF SWITCH WILL FACE LEFT SIDEWALL.
- 8 DETAIL IS LOOKING AT SWITCH FROM THE BACK SIDE OF SWITCH AS IT IS INSTALLED.
- 7 SEE SHEET 7 FOR GAUGE PLACEMENT.
- 6 MOUNT SWITCH SO WHEN ACTUATOR IS PUSHED LEFT, THE LETTER L IS SHOWING. DETAIL EE.
- 5 WITHOUT 092
- 4 HOUSING ON WIRE ASM IS MARKED WITH YELLOW TAPE.
- 3 FOR SWITCH WIRING SEE DETAIL DC.
- 2 FOR SWITCH ORIENTATION SEE DETAIL ED.
- 1 FOR SWITCH ORENTATION SEE DETAIL EC.

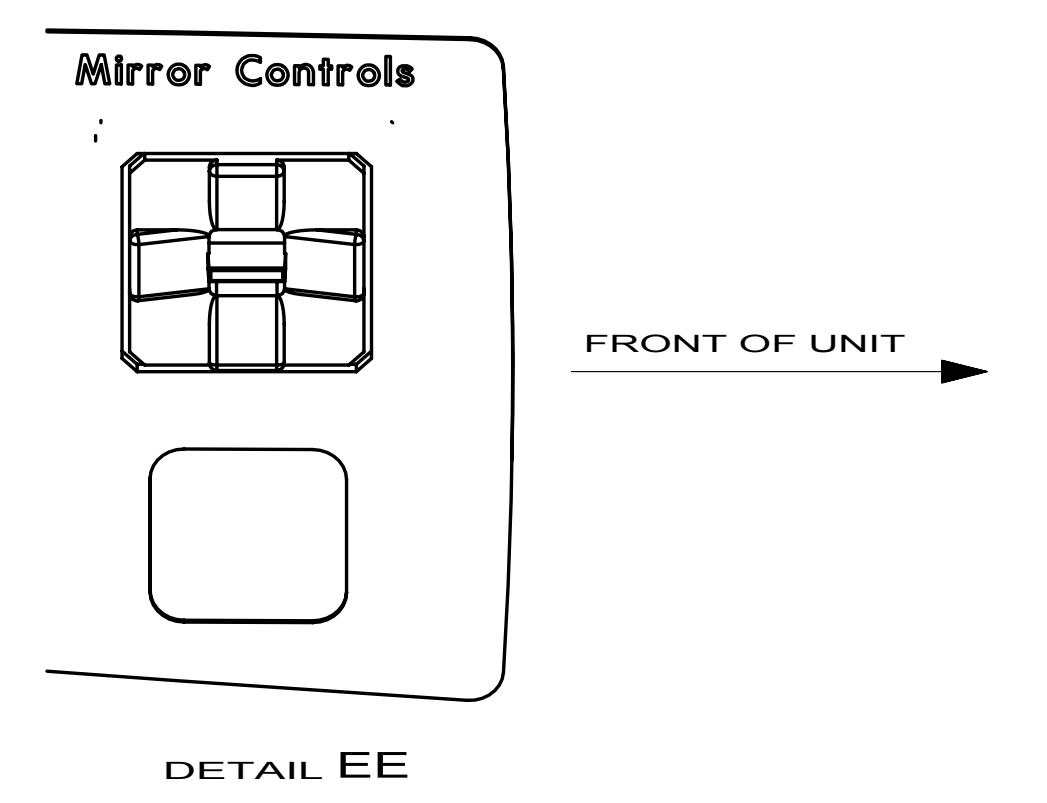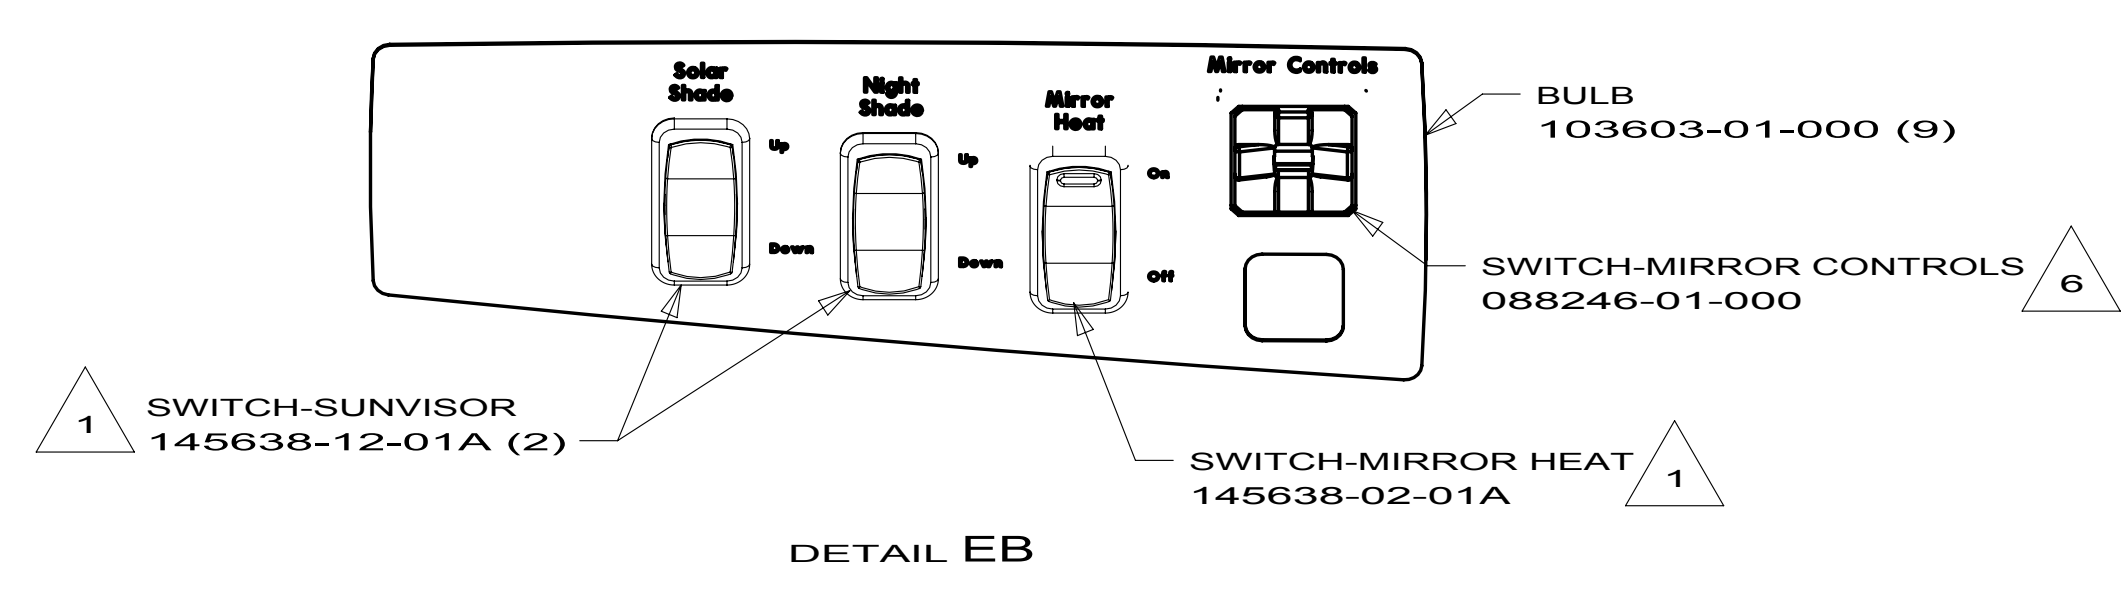NOTES:




FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1LU FRTL 34,320 400HP 8.9L 6 SPD
- 1LE FRTL 44,320 400 6SPD IFS TAG
- 36P AIR HORNS
- 09L SLIDEOUT ROOM FRONT LEFT
- 092 SLIDEOUT ROOM - FRONT RIGHT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 5	PART NO 169937	REV

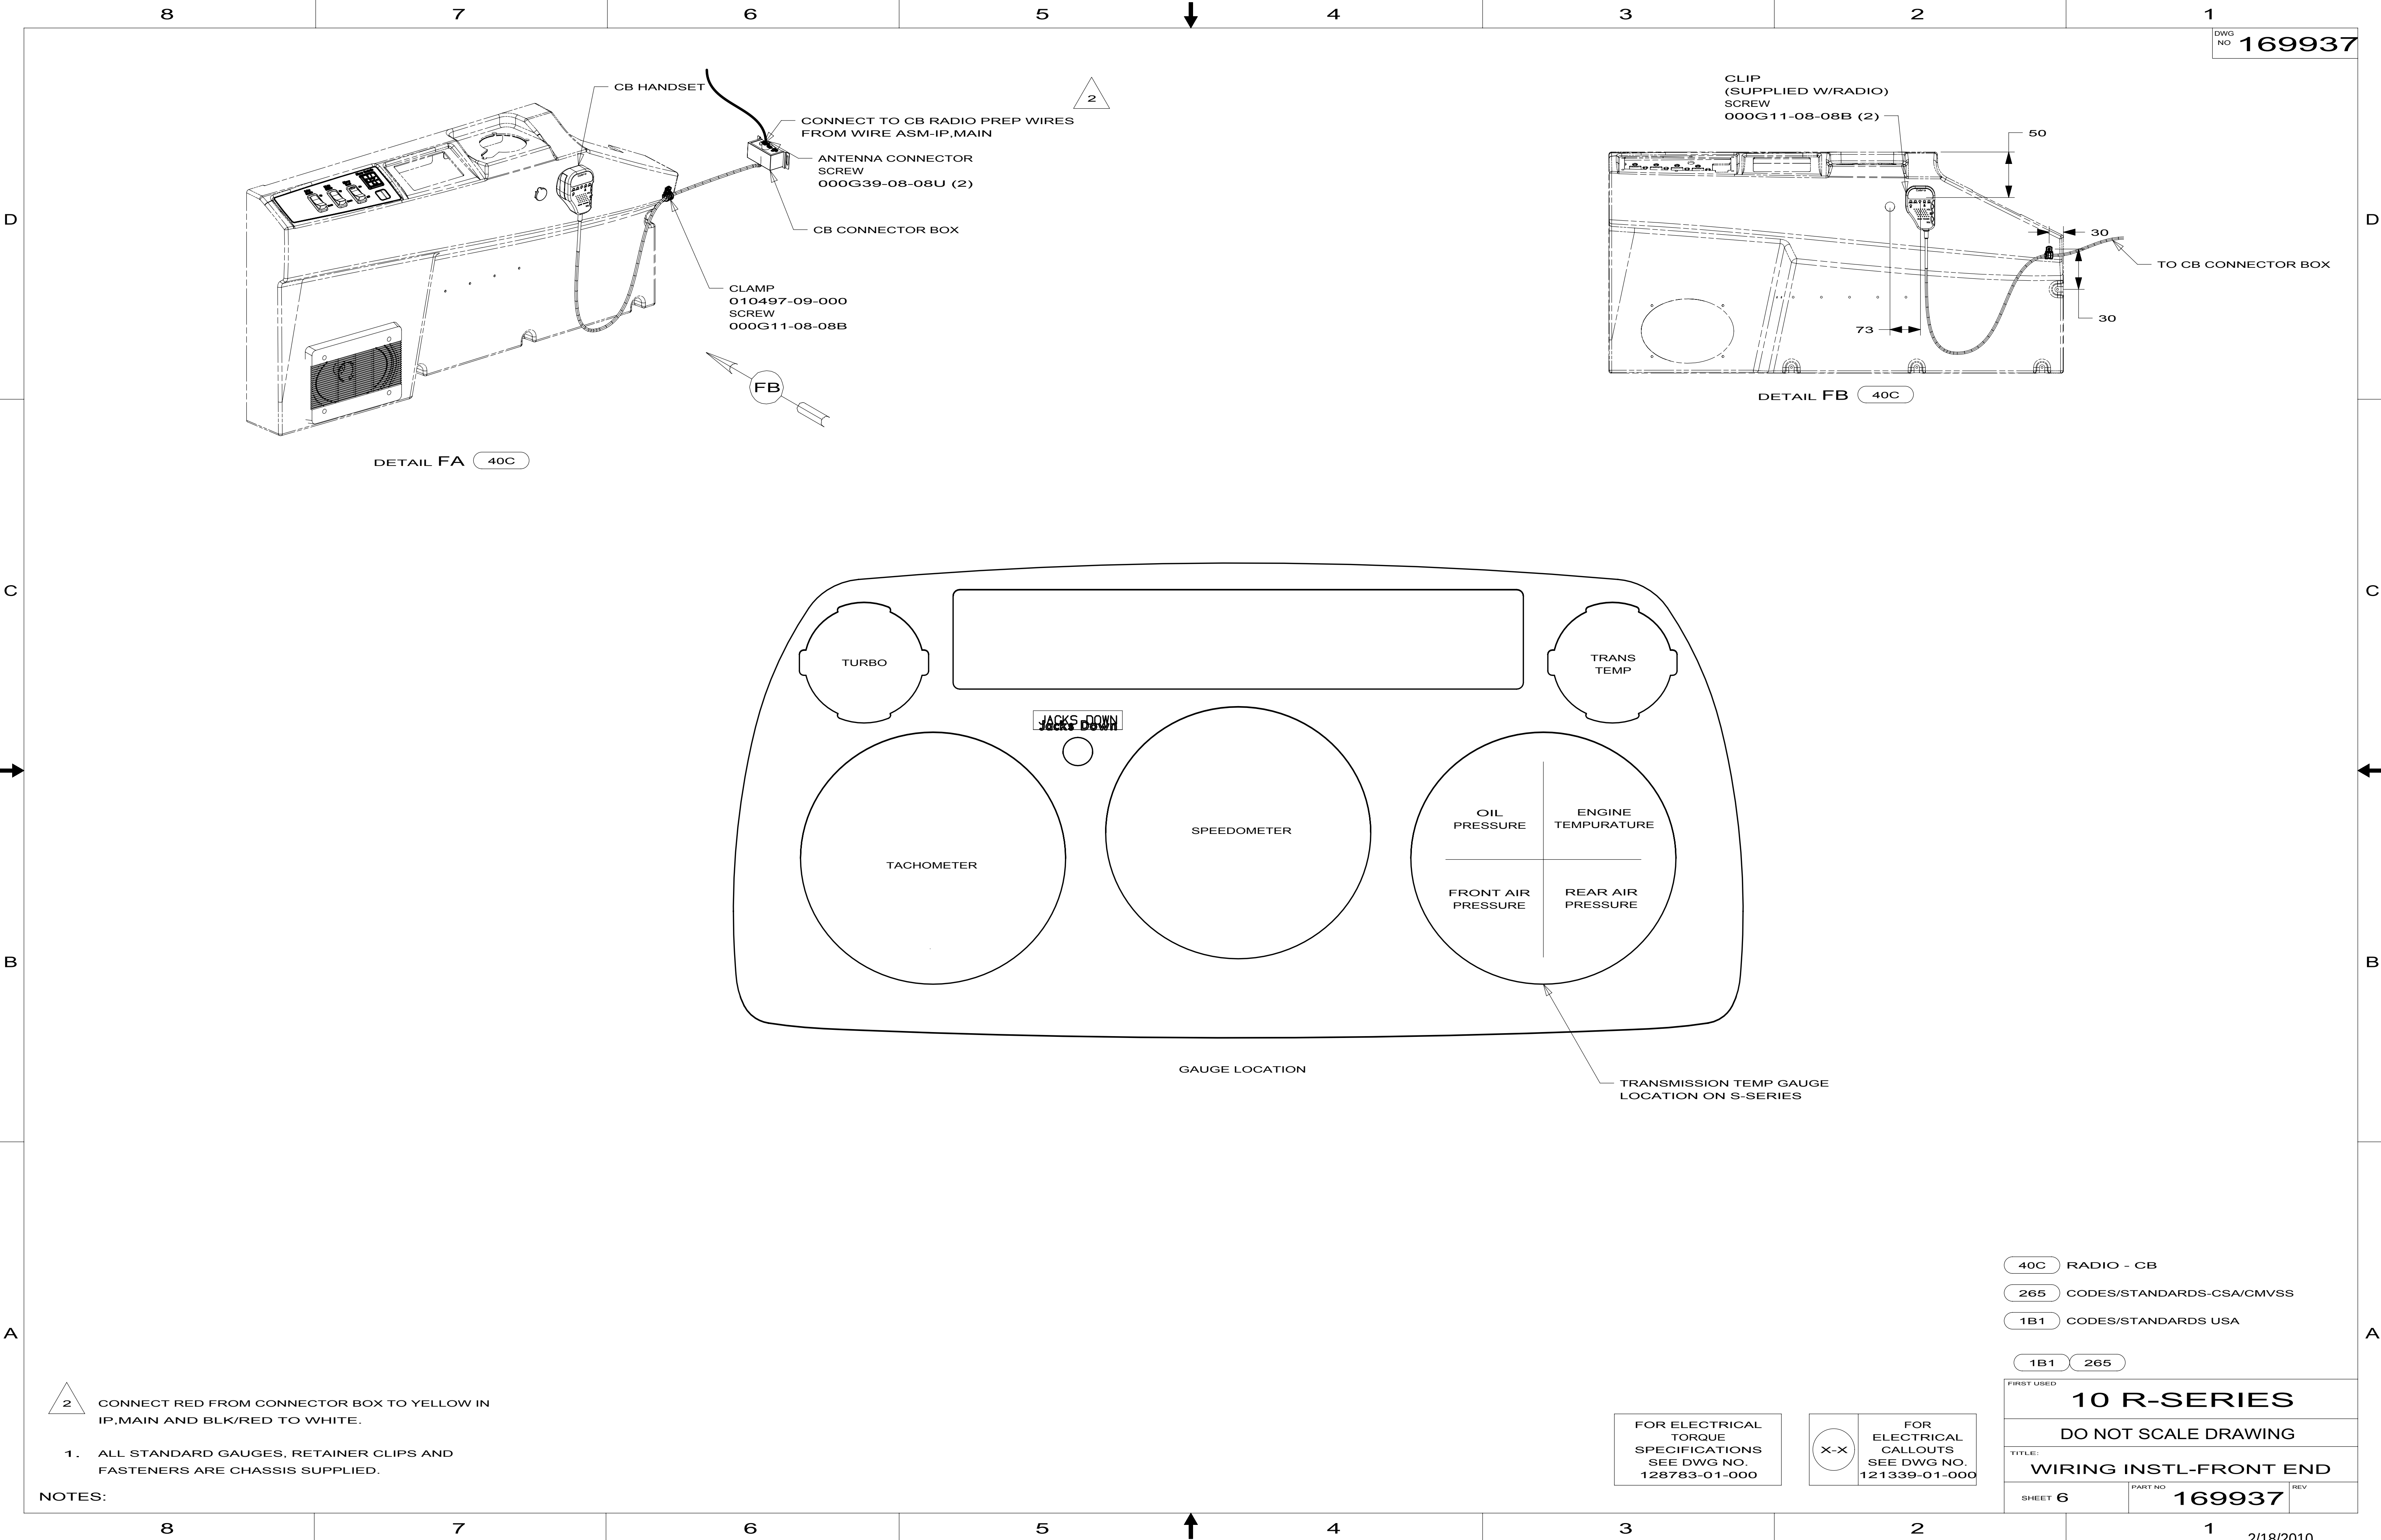

DETAIL FA 40C

DETAIL FB 40C

GAUGE LOCATION

TRANSMISSION TEMP GAUGE
LOCATION ON S-SERIES

2 CONNECT RED FROM CONNECTOR BOX TO YELLOW IN
IP,MAIN AND BLK/RED TO WHITE.

1. ALL STANDARD GAUGES, RETAINER CLIPS AND
FASTENERS ARE CHASSIS SUPPLIED.

NOTES:


- 40C RADIO - CB
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 6	PART NO 169937	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

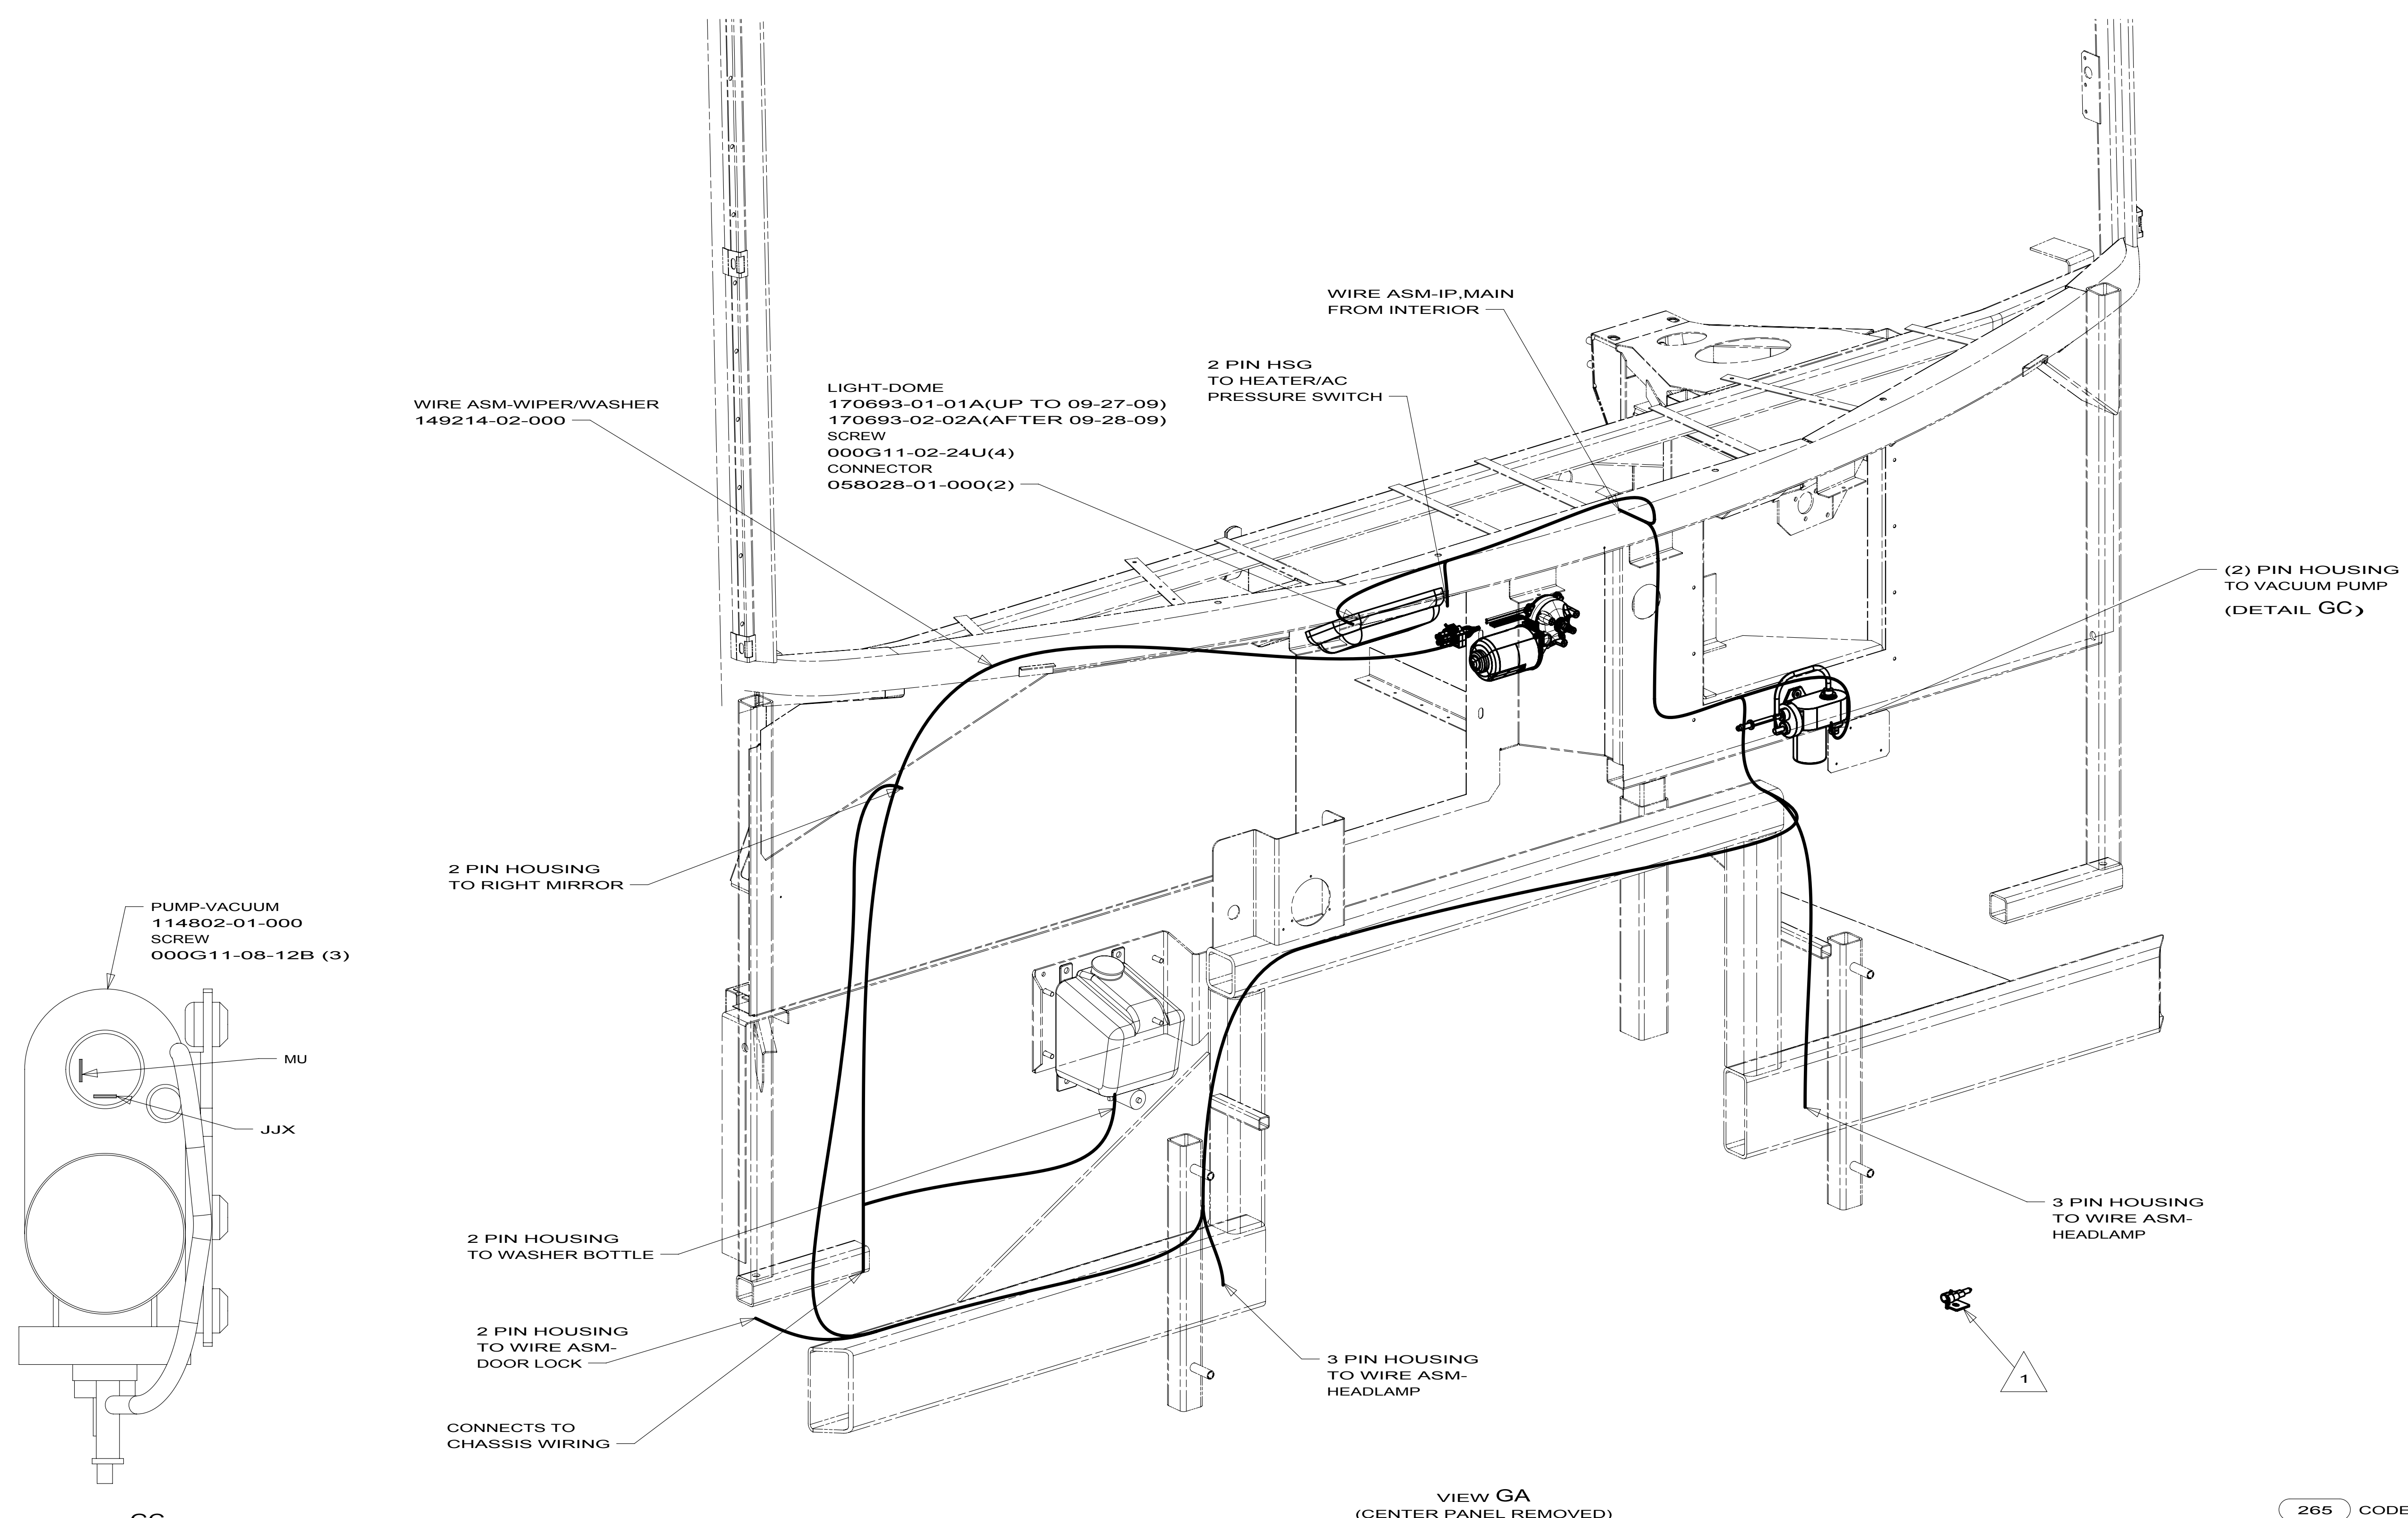FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



1 DRILL 5MM HOLE IN LOWER LIP OF FIBERGLASS IN AREA SHOWN.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-FRONT END		
SHEET 7	PART NO 169937	REV

136119-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	136119-01-700	EA COMPASS SENSOR (BLACK BOX)	AP-SUB-005
	136119-01-701	EA PROBE/TEMPERATURE SENSOR(V1)	AP-SUB-004A
	136119-01-702	EA DISPLAY MODULE-LED (V1)	AP-SUB-004B
	136119-01-703	EA HARNESS - COMPASS POWER	AP-HRN-175
	136119-01-704	EA HARNESS - COMPASS ENGINE	AP-HRN-176
	136119-01-705	EA HRNSS-COMP.TEMP SENSOR V1	AP-HRN-177
	136119-01-706	EA PROBE/TEMPERATURE SENSOR (V2)	AP-SUB-006
	136119-01-707	EA DISPLAY MODULE - VISUAL (V2)	AP-SUB-007
	136119-01-708	EA HARNESS/COMP. COMP/THERM(V2)	AP-HRN-239 W/PACKRD

KEY	PART NUMBER	U/M DESCRIPTION
	137417-01-700	EA LENS - SINGLE (FROSTED)

137417-01-01A, 137417-03-01A
VENDOR NO.
810868

KEY	PART NUMBER	U/M DESCRIPTION
	137417-02-700	EA LENS - SINGLE OPTIC

137417-02-01A
VENDOR NO.
810844

KEY	PART NUMBER	U/M DESCRIPTION
	137417-05-700	EA LENS - DOUBLE OPTIC


137417-05-01A
VENDOR NO.
810845

151458-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	102756-02-702	EA BATTERY - 12 VOLT	402-1002
	102756-03-701	EA REMOTE-KEYLESS ENTRY	412-1115
	102756-03-702	EA RELAY- 30AMP - SPDT	463-1000
	151458-01-700	EA MODULE BOARD - 4 FUNCTION	202-3227
	151458-01-701	EA WIRE HARNESS - KEYLESS ENTRY	203-6908

151458-02-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	151458-02-700	EA COVERS (2 PER PKG) F/KEY PAD	208-3896
	151458-02-701	EA GASKET - OUTER - F/KEYPAD	308-2094

KEY	PART NUMBER	U/M	DESCRIPTION	163097-01-000	VENDOR NO.
	163097-01-700	EA	KEY - #2382 (ILLINOIS LOCK)		2382
	163097-01-701	EA	KEY - #2341 (MILLER DIAL)		PART SALES

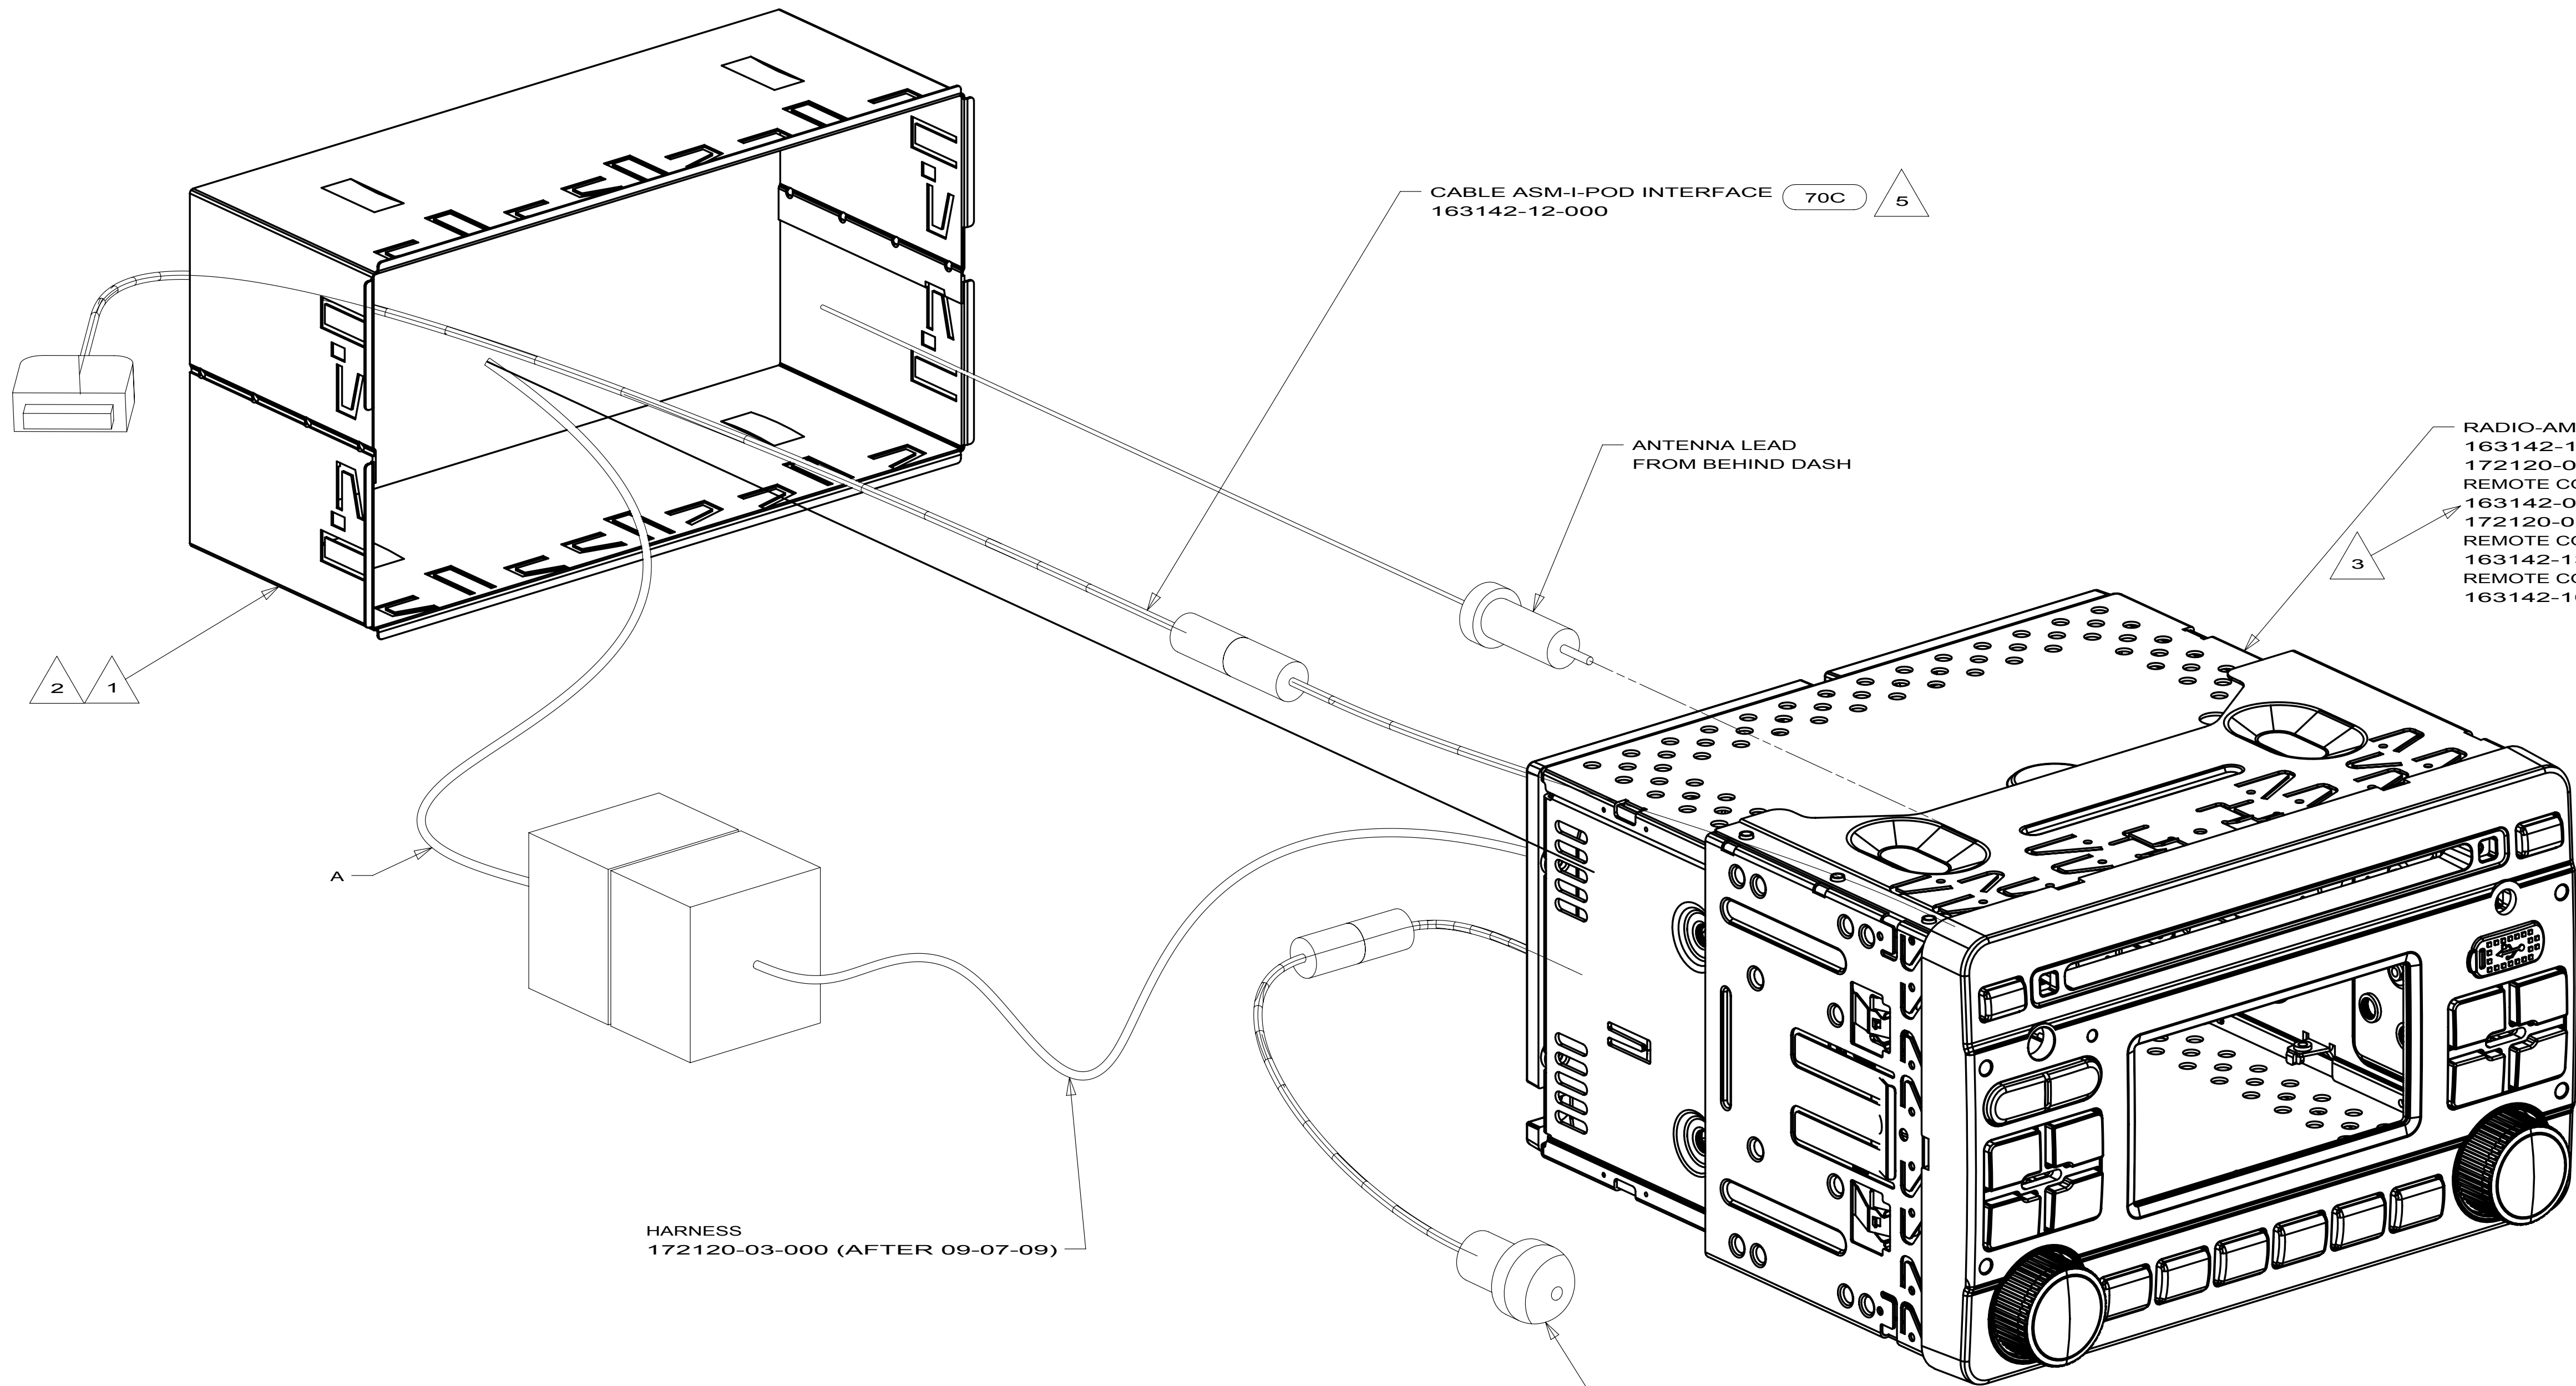J-SERIES
P-SERIES
R-SERIES
169847-04



- 7 FORD CHASSIS.
- 6 WORKHORSE AND FREIGHTLINER CHASSIS.
- 5 PLUG I-POD CABLE INTO LEAD ON BACK OF RADIO MARKED 'I-POD'.
ROUTE CABLE UP LEFT A-PILLAR AND INTO OVERHEAD CABINET
ABOVE DRIVER. LEAVE 600 MM OF CABLE IN OVERHEAD TIED UP
WITH WIRE TIE 8343-01-000.
- 4 INSTALL PER DRAWING 170205.
- 3 TO BE SUPPLIED LOOSE IN WINNEBAGO OWNERS CASE.
- 2 BEND TABS ON ALL 4 SIDES TO SECURE MOUNTING BRACKET TO DASH OPENING.
- 1 SUPPLIED WITH RADIO.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 70C RADIO - SATELLITE
- 19V RADIO-AM/FM STEREO CD PLAYER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

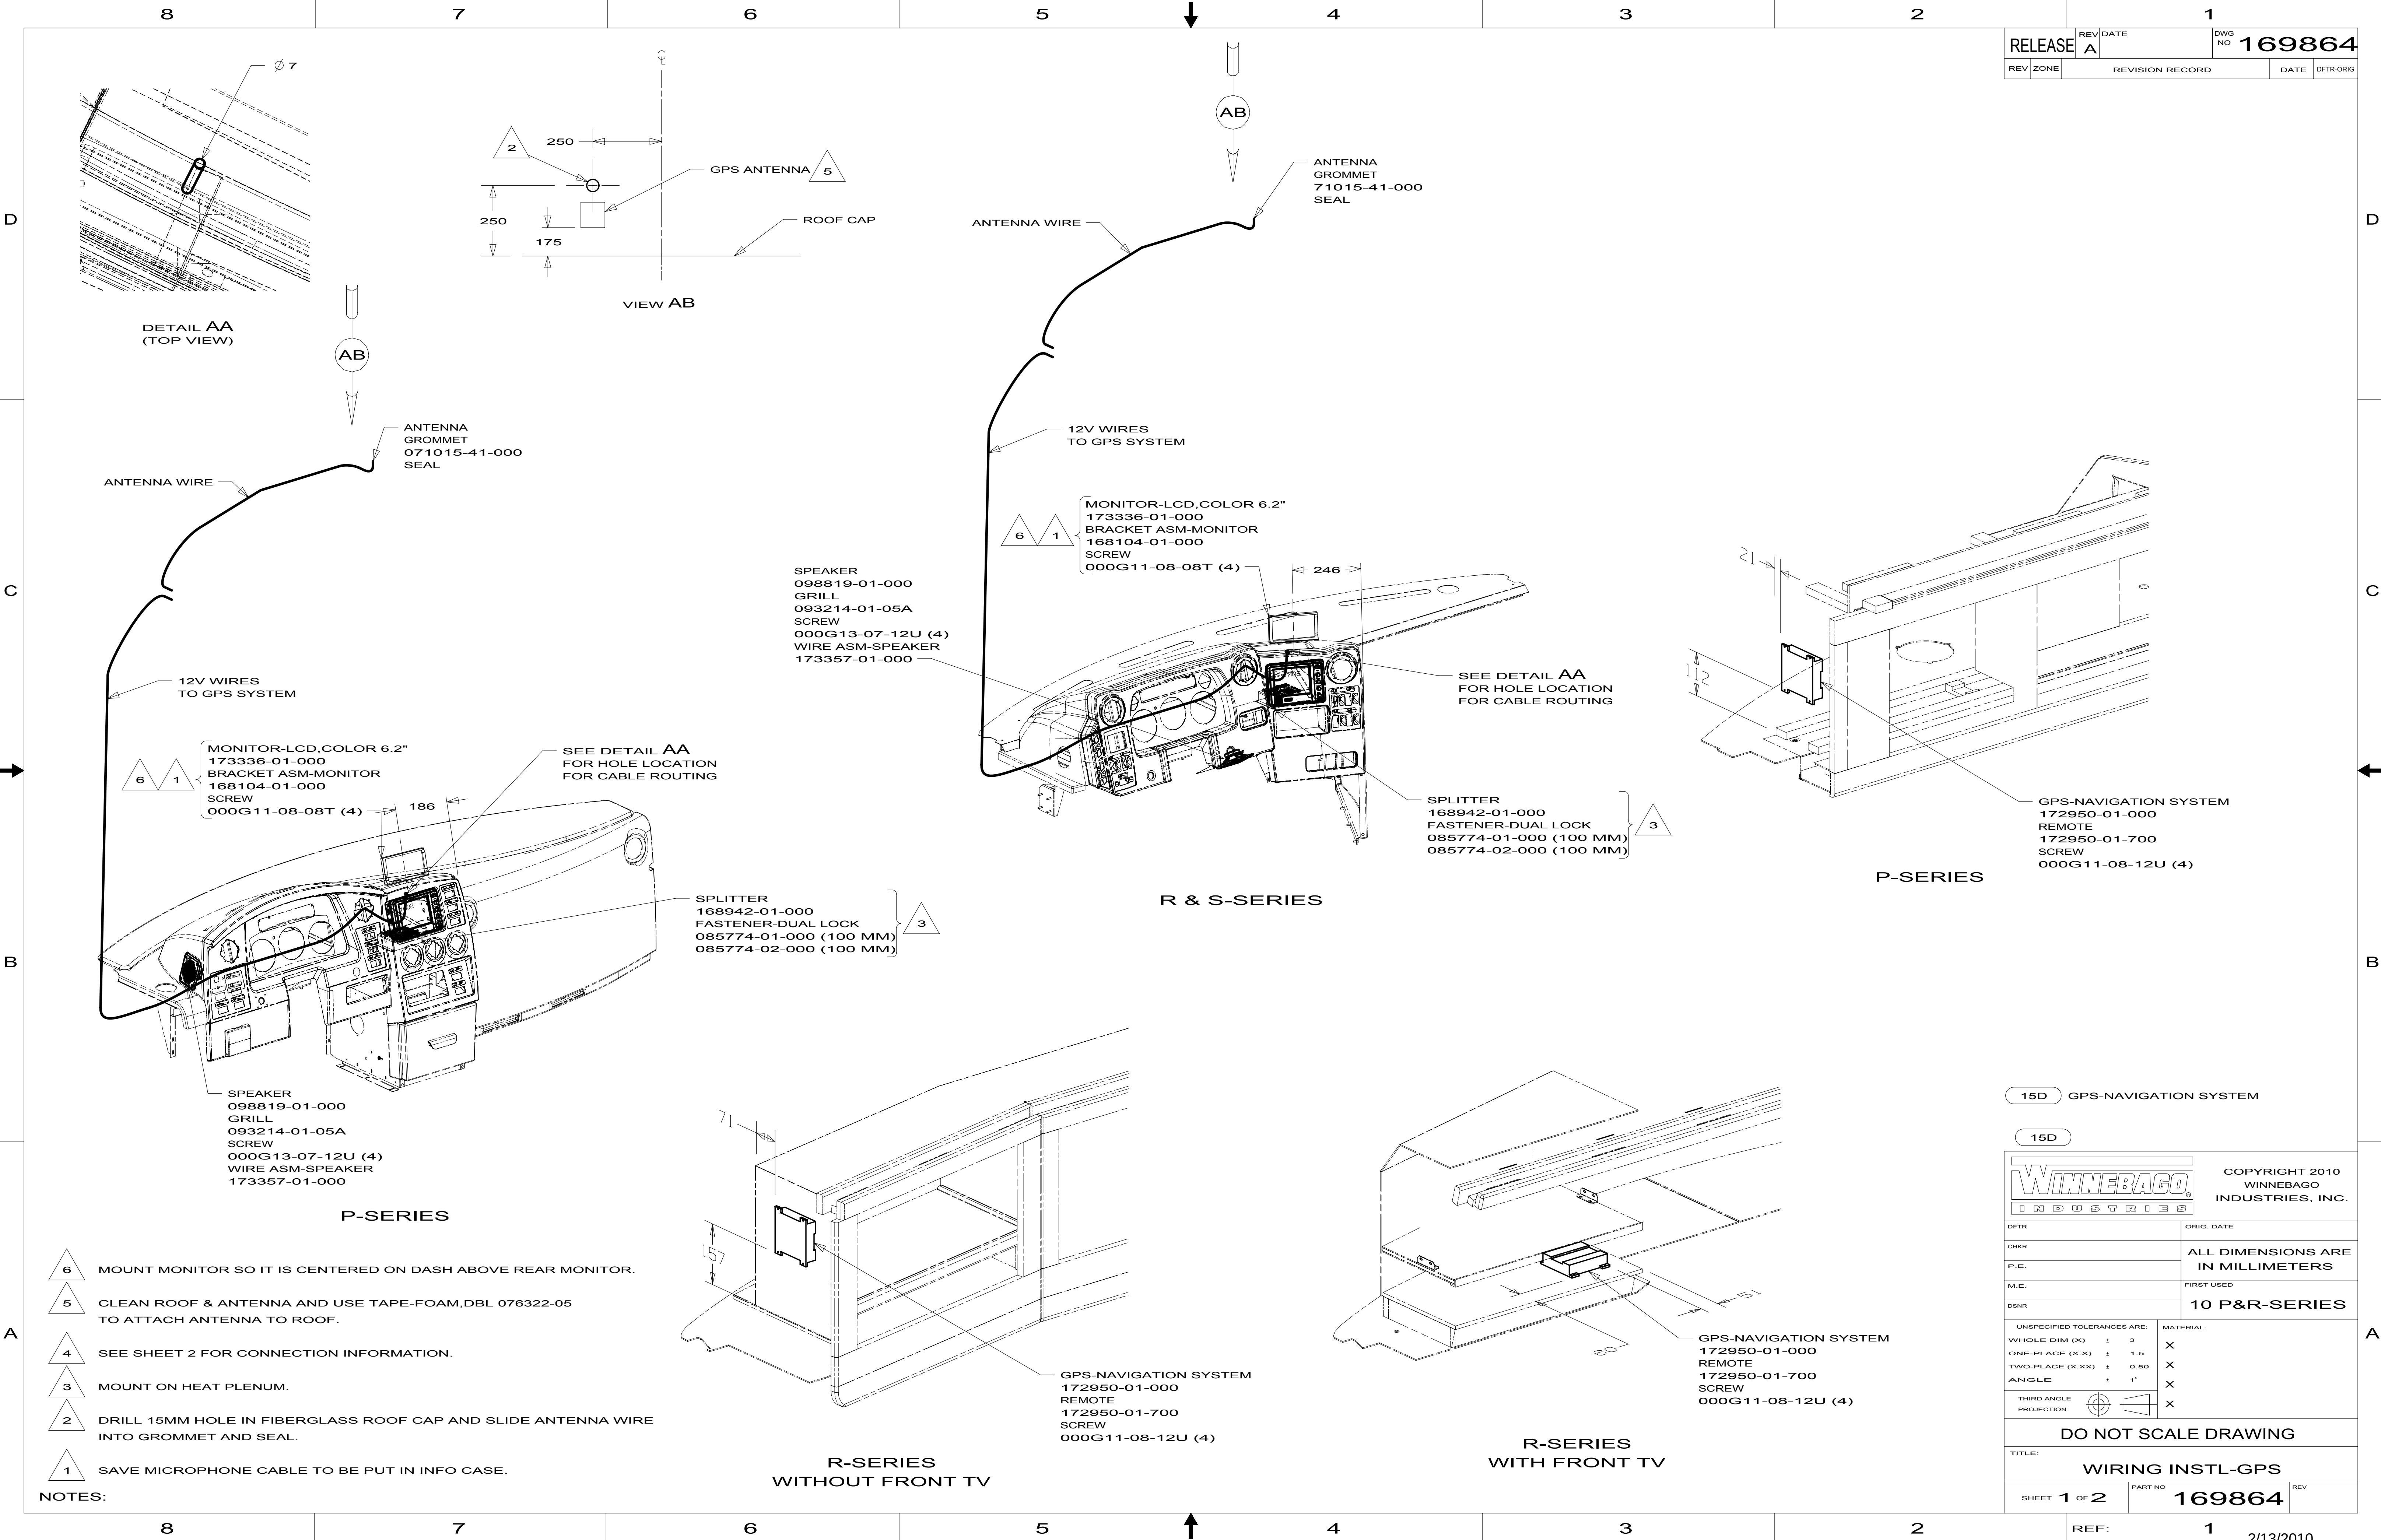
1B1 265 19V

FIRST USED
10 J,P,R-SERIES

DO NOT SCALE DRAWING

TITLE:
RADIO INSTL

SHEET 4 PART NO 169847 REV



- 6

MOUNT MONITOR SO IT IS CENTERED ON DASH ABOVE REAR MONITOR.
- 5

CLEAN ROOF & ANTENNA AND USE TAPE-FOAM, DBL 076322-05 TO ATTACH ANTENNA TO ROOF.
- 4

SEE SHEET 2 FOR CONNECTION INFORMATION.
- 3

MOUNT ON HEAT PLENUM.
- 2


DRILL 15MM HOLE IN FIBERGLASS ROOF CAP AND SLIDE ANTENNA WIRE INTO GROMMET AND SEAL.
- 1

SAVE MICROPHONE CABLE TO BE PUT IN INFO CASE.

NOTES:


15D GPS-NAVIGATION SYSTEM

15D

WINNEBAGO® INDUSTRIES		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.		
DFT#	ORIG. DATE			
CHK#	ALL DIMENSIONS ARE IN MILLIMETERS			
P.E.				
M.E.				
DSNR	FIRST USED			
		10 P&R-SERIES		
UNSPECIFIED TOLERANCES ARE:		MATERIAL:		
WHOLE DIM (X)	± 3	X		
ONE-PLACE (X.X)	± 1.5	X		
TWO-PLACE (X.XX)	± 0.50	X		
ANGLE	± 1°	X		
THIRD ANGLE PROJECTION		X		


DO NOT SCALE DRAWING

TITLE: WIRING INSTL-GPS			
SHEET 1 OF 2	PART NO 169864	REV	

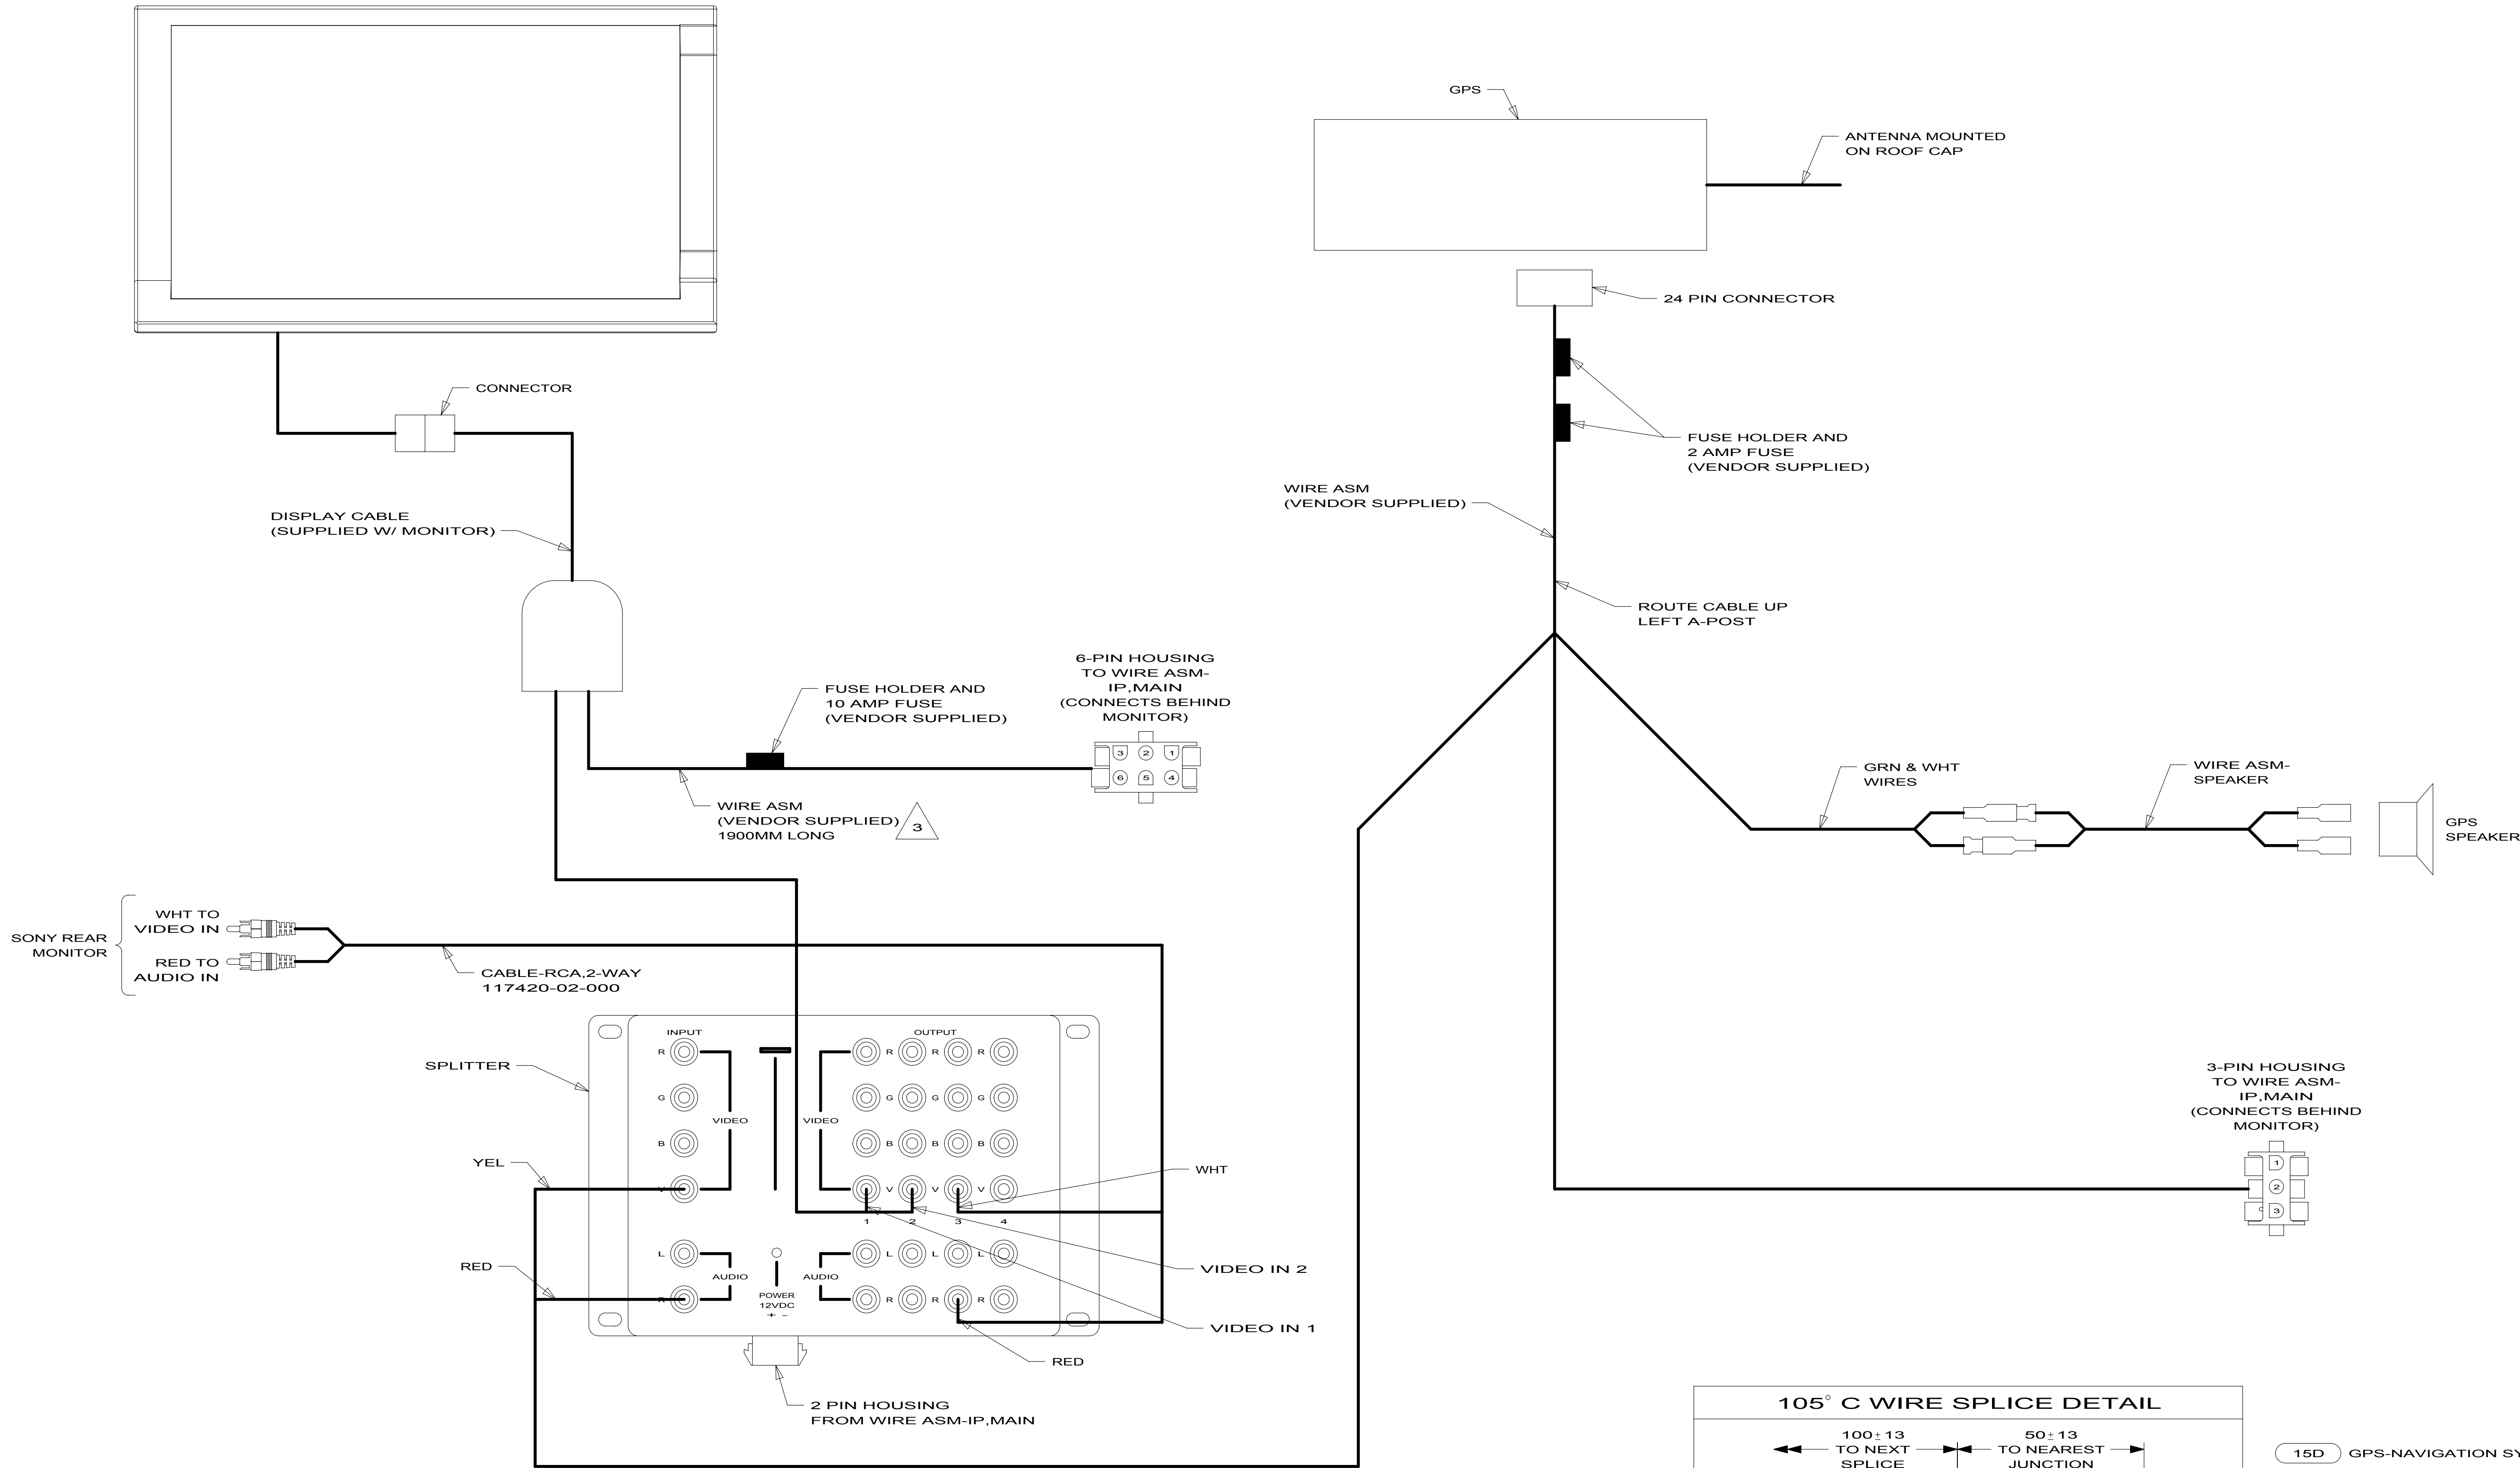

- NOTES:
- 4 RCA CABLES ARE NOT USED
 - 3 CUT WIRE ASM TO AVOID EXCESS WIRE BUNDLING AND TAPE UNUSED WIRES.
 - 2 CUT TERMINALS FROM VENDOR SUPPLIED WIRES AND SPLICE AS SHOWN.
 - 1 NOT USED, CUT WIRE AND TIE BACK TO LOOM.

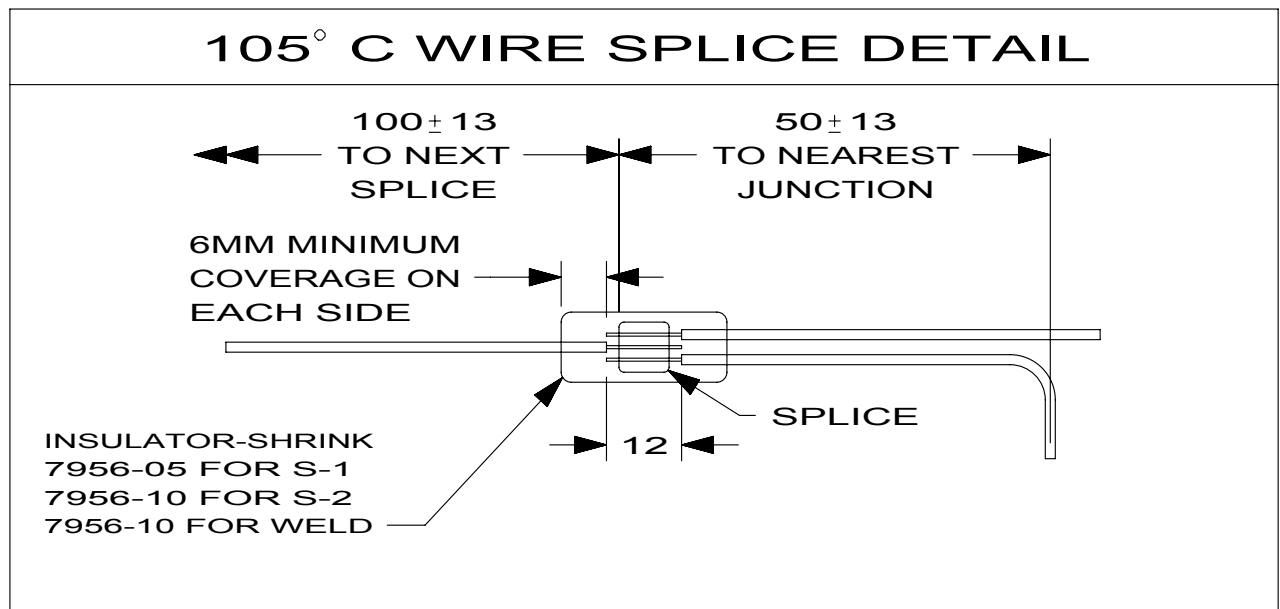FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000



15D GPS-NAVIGATION SYSTEM

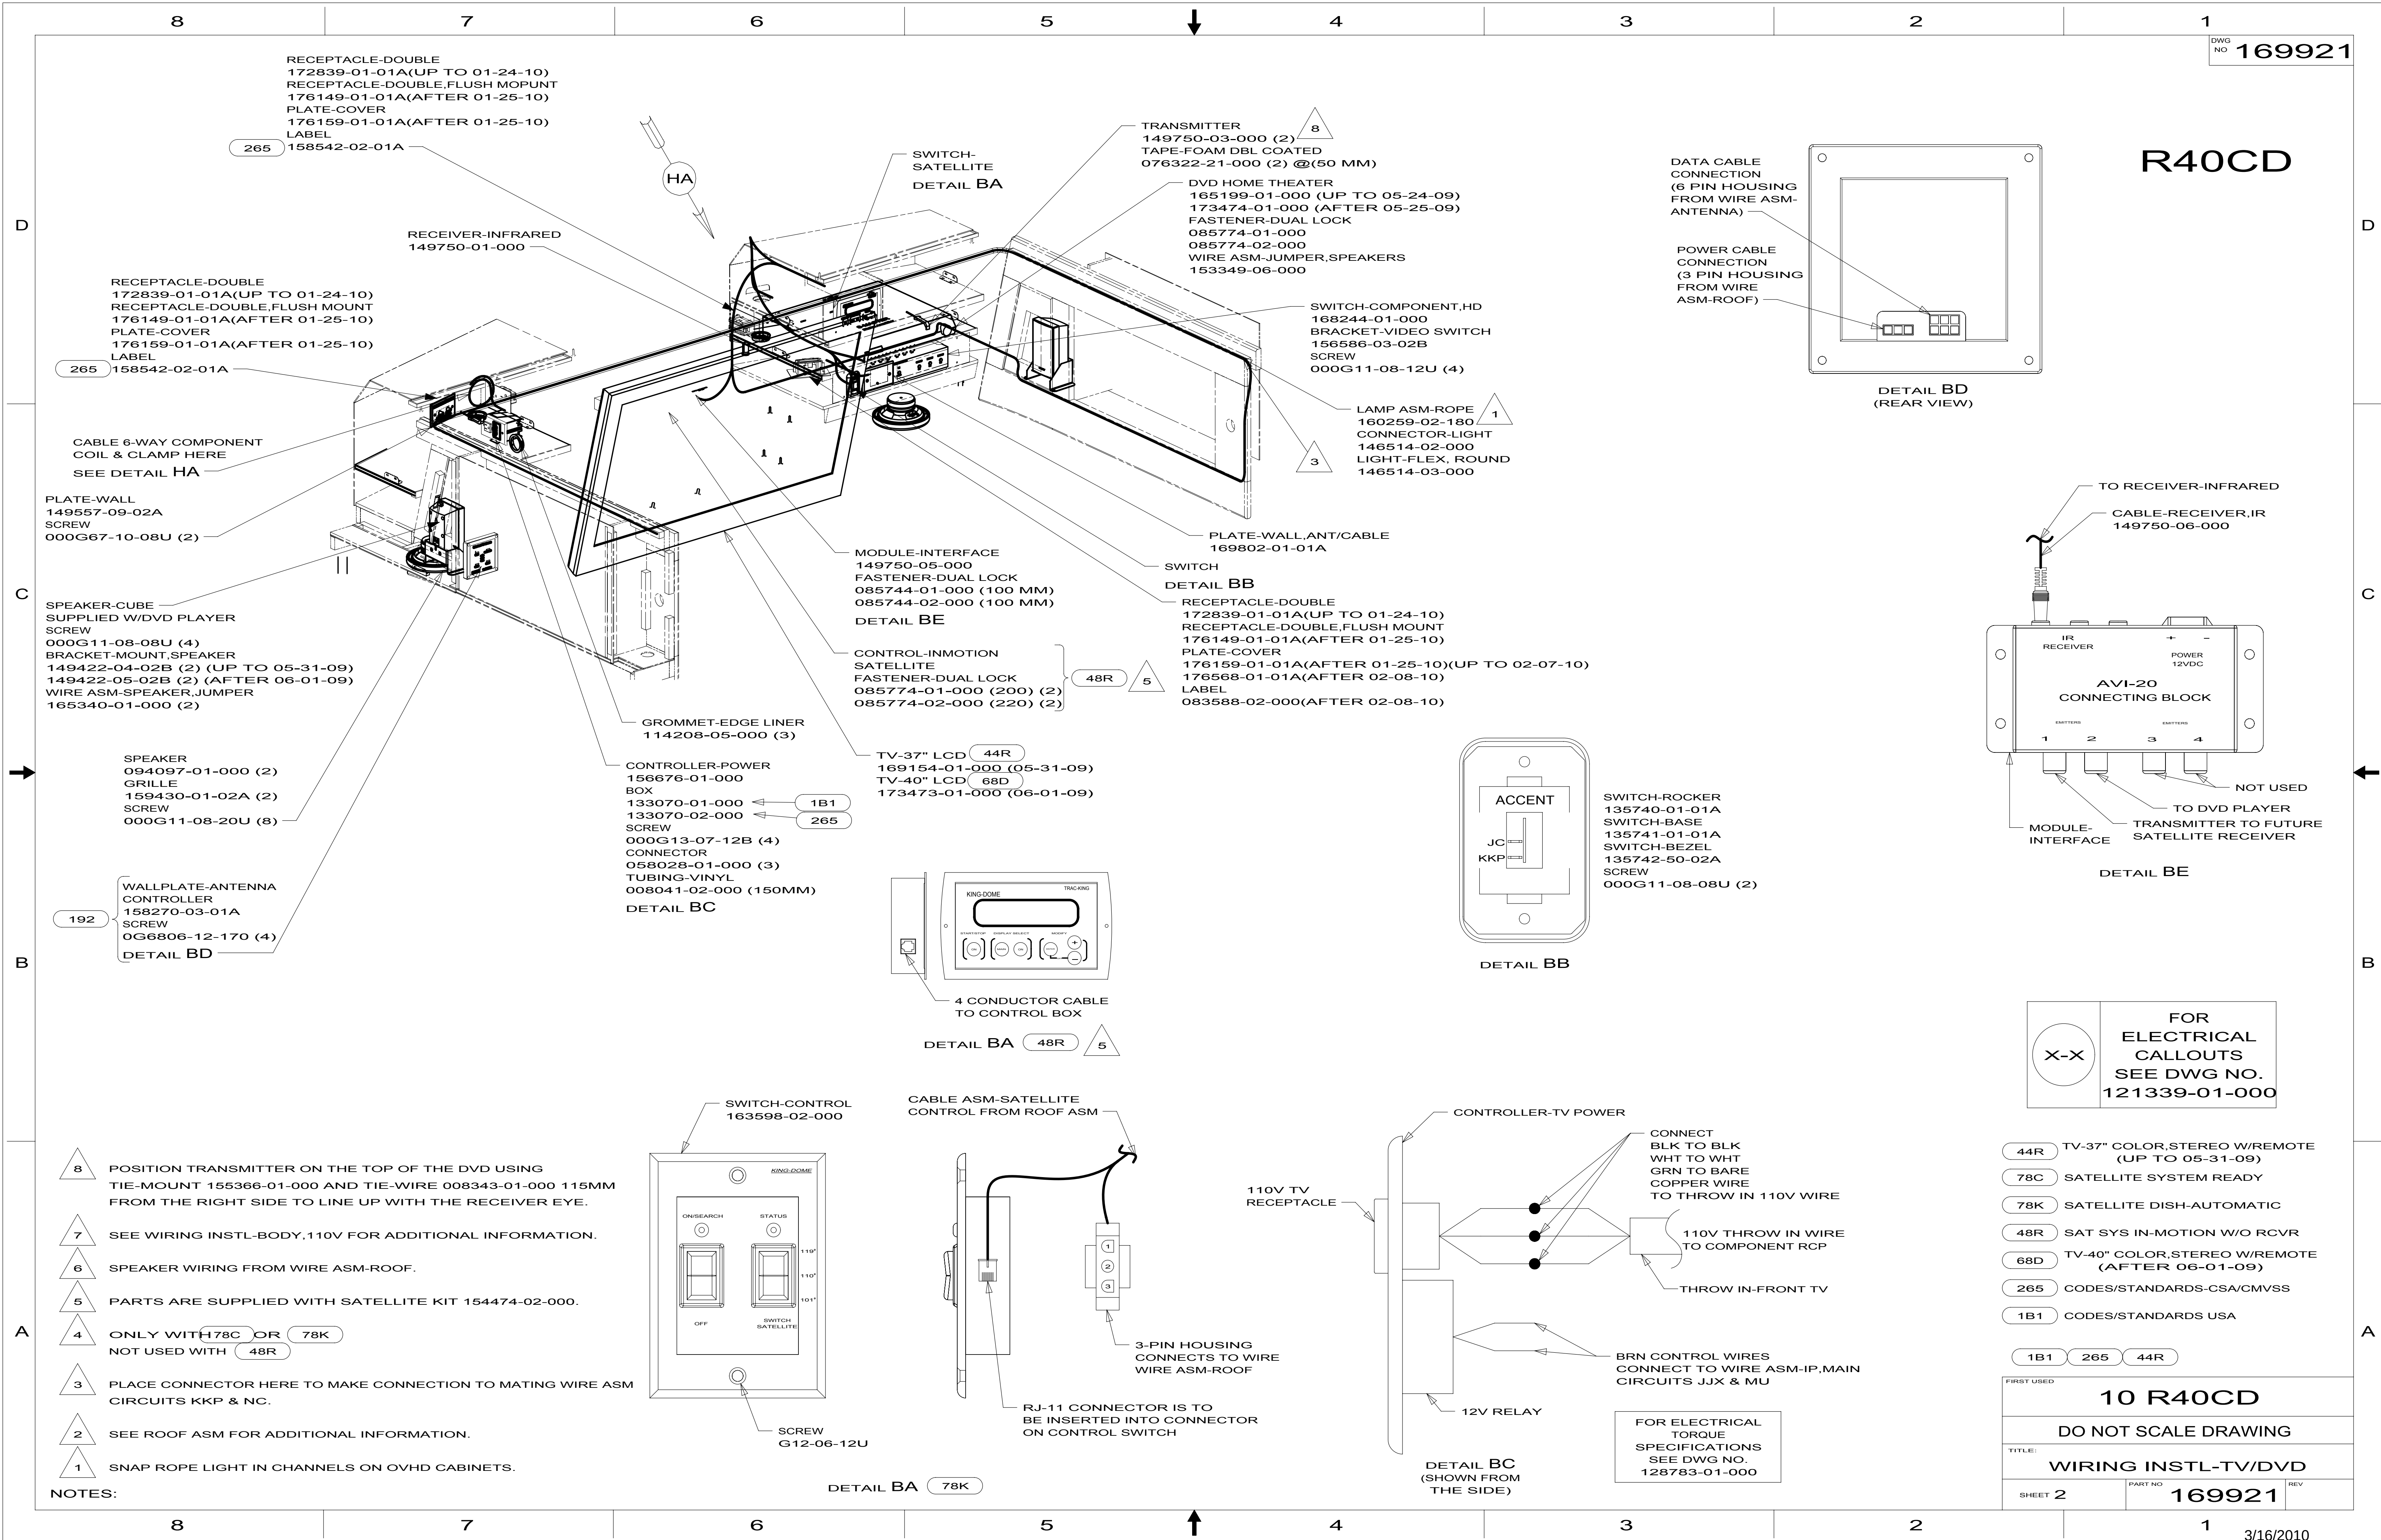
15D

FIRST USED 10 P&R-SERIES


DO NOT SCALE DRAWING

TITLE: WIRING INSTL-GPS

SHEET 2 PART NO 169864 REV



R40CD
(UP TO 05-31-09)

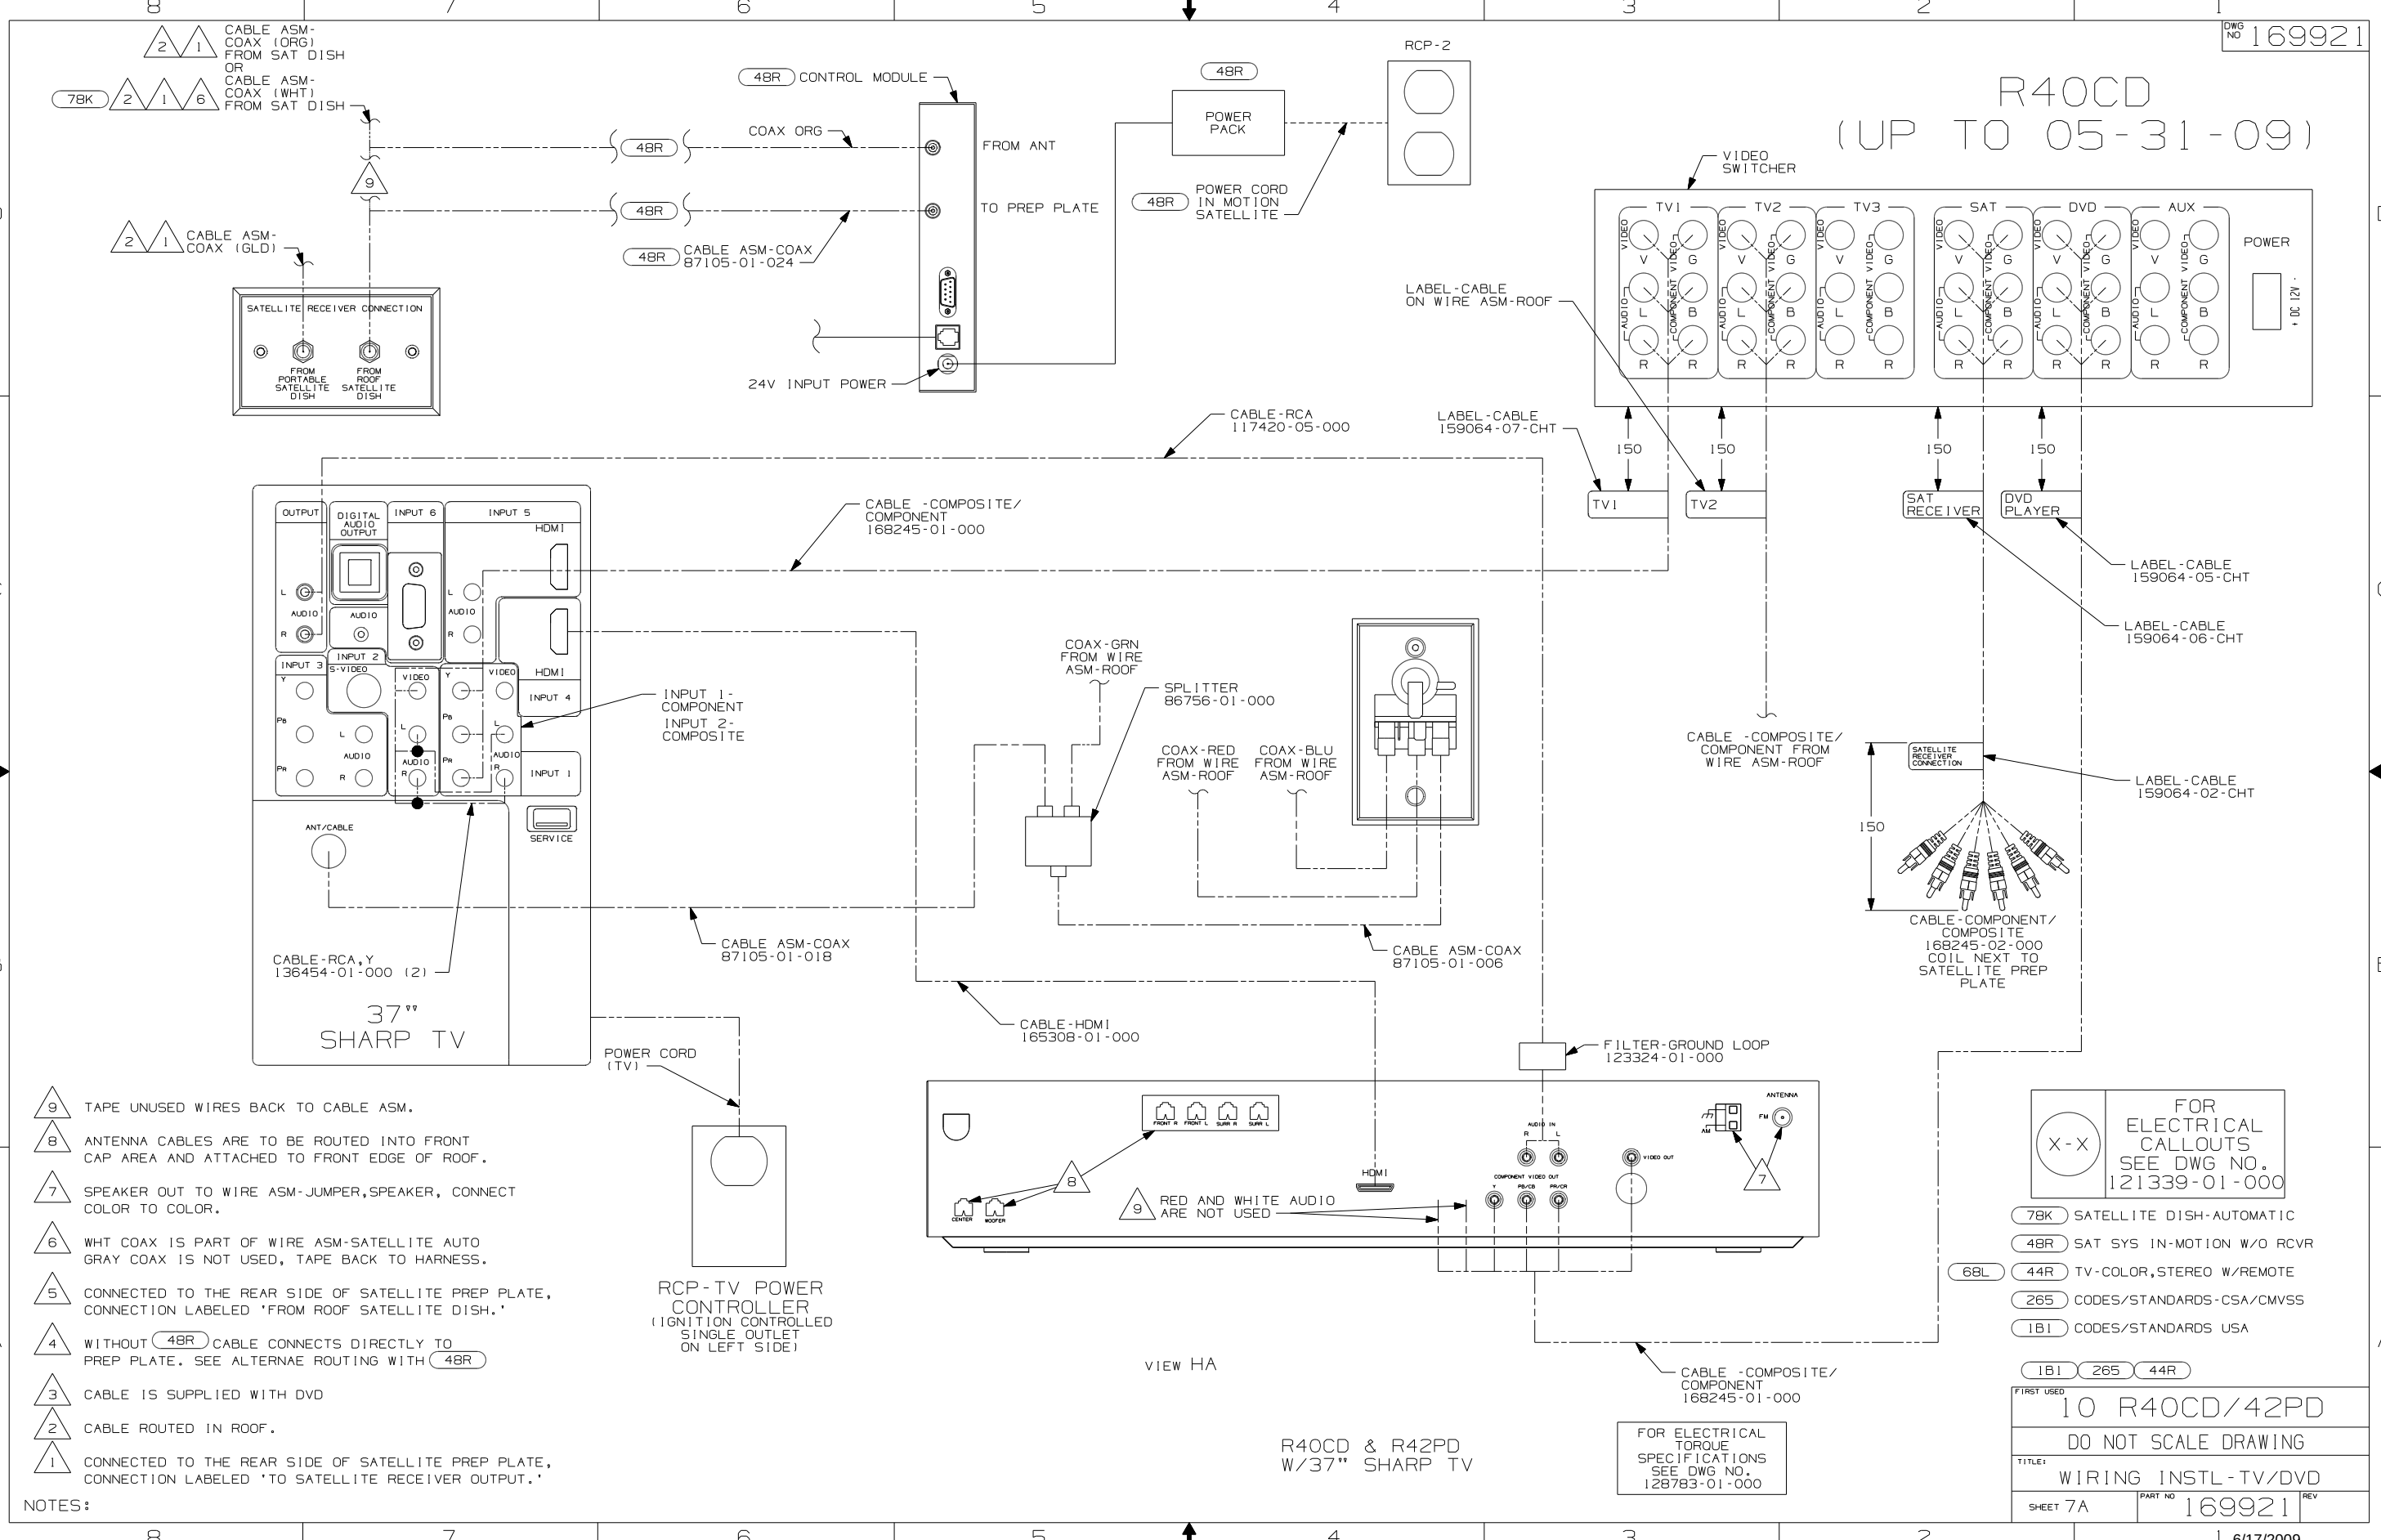

- NOTES:
- 9 TAPE UNUSED WIRES BACK TO CABLE ASM.
 - 8 ANTENNA CABLES ARE TO BE ROUTED INTO FRONT CAP AREA AND ATTACHED TO FRONT EDGE OF ROOF.
 - 7 SPEAKER OUT TO WIRE ASM-JUMPER, SPEAKER, CONNECT COLOR TO COLOR.
 - 6 WHT COAX IS PART OF WIRE ASM-SATELLITE AUTO GRAY COAX IS NOT USED, TAPE BACK TO HARNESS.
 - 5 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'FROM ROOF SATELLITE DISH.'
 - 4 WITHOUT 48R CABLE CONNECTS DIRECTLY TO PREP PLATE. SEE ALTERNAE ROUTING WITH 48R
 - 3 CABLE IS SUPPLIED WITH DVD
 - 2 CABLE ROUTED IN ROOF.
 - 1 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'TO SATELLITE RECEIVER OUTPUT.'

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 78K SATELLITE DISH-AUTOMATIC
- 48R SAT SYS IN-MOTION W/O RCVR
- 68L 44R TV-COLOR, STEREO W/REMOTE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 44R

FIRST USED		10 R40CD/42PD	
		DO NOT SCALE DRAWING	
TITLE:		WIRING INSTL-TV/DVD	
SHEET 7A	PART NO	169921	REV

R40CD & R42PD
W/37" SHARP TV

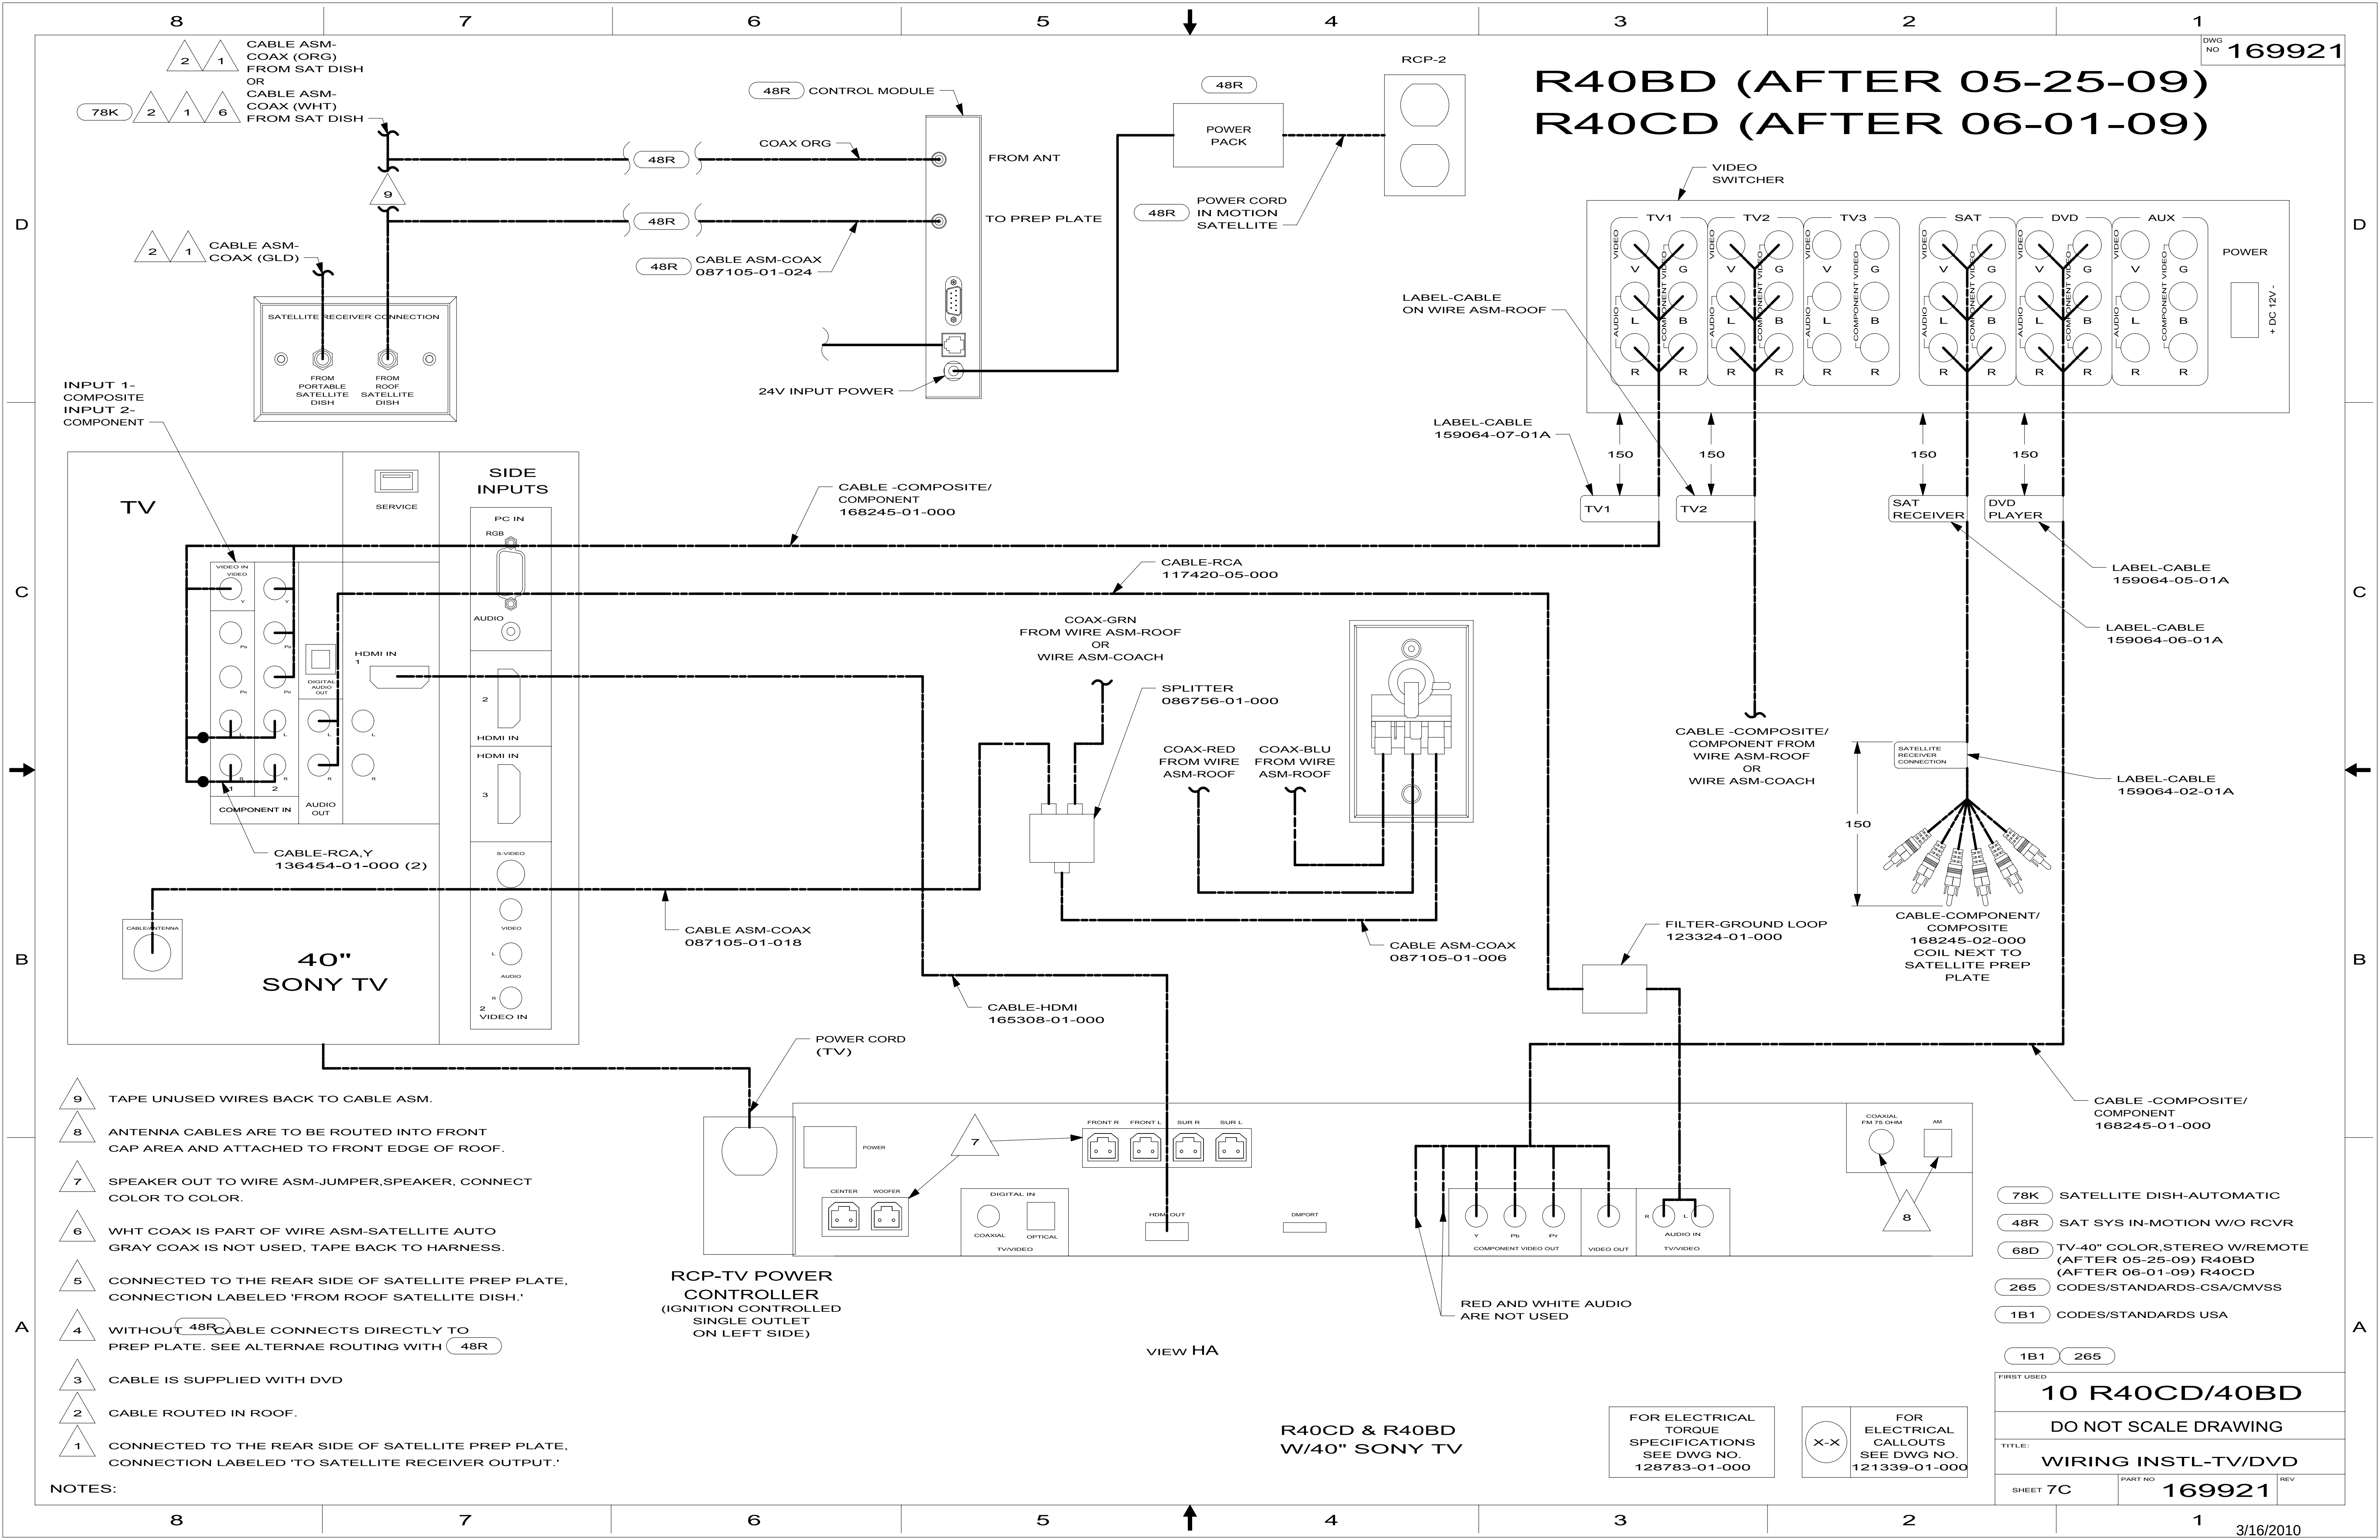FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000



KEY	PART NUMBER	U/M	DESCRIPTION
	169154-01-700	EA	REMOTE - TV

169154-01-000
VENDOR NO.
RRMCGA667WJSA