
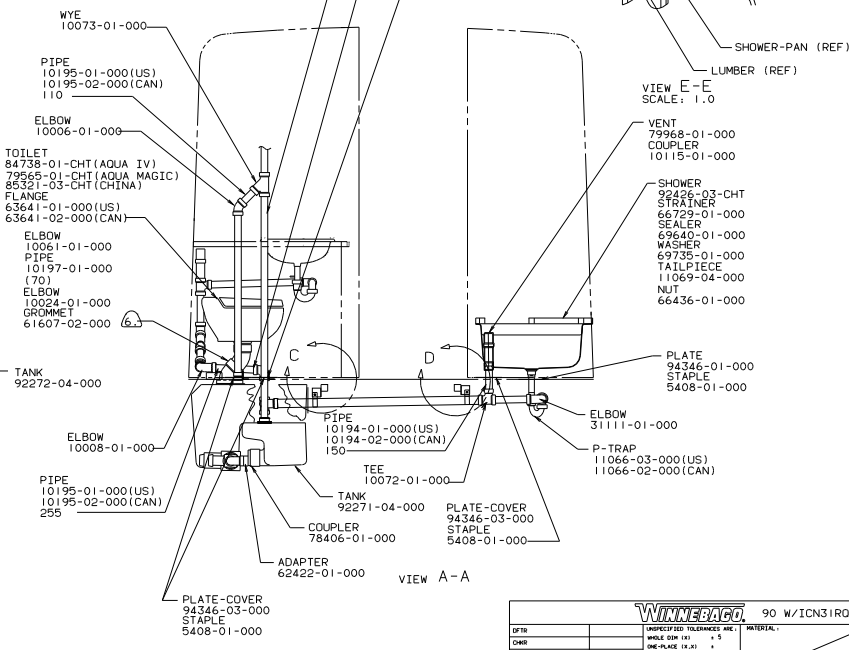

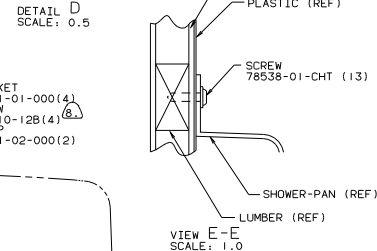



DETAIL B
SCALE: 0.2

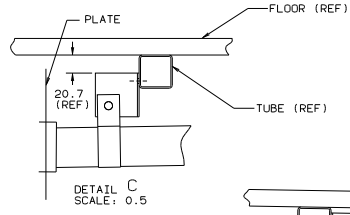

VIEW A-A

- NOTES:
1. SLOPE OF HORIZONTAL PIPING TO BE 6 PER 300 MINIMUM.
 2. SLOPE OF TRAP MUST BE 6 PER 300 MINIMUM.
 3. ALL PIPE AND FITTINGS TO BE ASSEMBLED WITH SOLVENT 4020-01-000.
 4. FOR CANADIAN UNITS EACH HOLDING TANK SHALL HAVE A CSA APPROVAL STAMPED NEAR IAPMO APPROVAL.
 5. SEAL ALL AROUND SHOWER WITH SILICON 78474-01-CHT.
 6. SEE DWG 61607-01-000 FOR INSTL OF GROMMET.
 7. VENT PIPE MUST BE PROJECT 51MM MIN TO 64MM MAX ABOVE ROOF FOR PROPER FIT AND FUNCTION.
 8. SECURE VENT TUBES TO FLOOR.
 9. DIMENSION IS FROM CENTERLINE OF PIPE TO CENTERLINE OF FRONT AXLE.

WINNENAGO 90 W/ICN31RD

DATE	ISSUED TO	TOLERANCES ARE:	MATERIAL:
CHD	WHOLE DIM (1)	± .5	
P.E	FINISH DIM (1)	± .1	
P.L	TWO-PLACE DIM (1)	± .01	
FORM	THIRD ANGLE PROJECTION		

DRAINAGE SYSTEM INSTL
 SHEET 1 OF 1
 96875

