



- Ⓐ TRIM P-TRAP EXTENSION TO FIT.
- Ⓑ SEE DRAWING 61607-01-000 FOR INSTALLATION OF GROMMET.
- Ⓒ VENT PIPE MUST PROJECT 51 MM TO 64 MM ABOVE ROOF FOR PROPER FIT AND FUNCTION.
- Ⓓ USED TO MOUNT STRAPS TO FLOOR ASM.

4. ALL EXTERIOR OPENINGS AROUND PIPE TO BE SEALED.
3. ALL PIPE AND FITTINGS TO BE ASSEMBLED WITH SOLVENT 4020-01-000.
2. SLOPE OF TRAP ARM MUST BE 21 PER METER.
1. SLOPE OF HORIZONTAL PIPING TO BE 10 PER METER MINIMUM.




DETAIL A

LAYER NO.		TITLE		90 W/1T32ORB	
DRAINAGE SYSTEM-INSTALLATION		WINNERACO		101048	
DATE	UNSPECIFIED TOLERANCES ARE:	MATERIAL			
CHG	ANGLE (1:20)	74300-03-000			
PIE	FACE-PLANE (1:20)	STRAP 56337-12-000 (4)			
PIE	FACE-PLANE (1:20)	BOLT C18-05-40A (4)			
ANG	ANGLE	NUT D39-05-00B (4)			
CON	INDIC. ANGLE PROJECTION	BOLT C18-05-40A (2)			
LAYER NO.		SCALE: NONE		SHEET 1 OF 1	
DATE		DOWNSIDE		NO 101048	

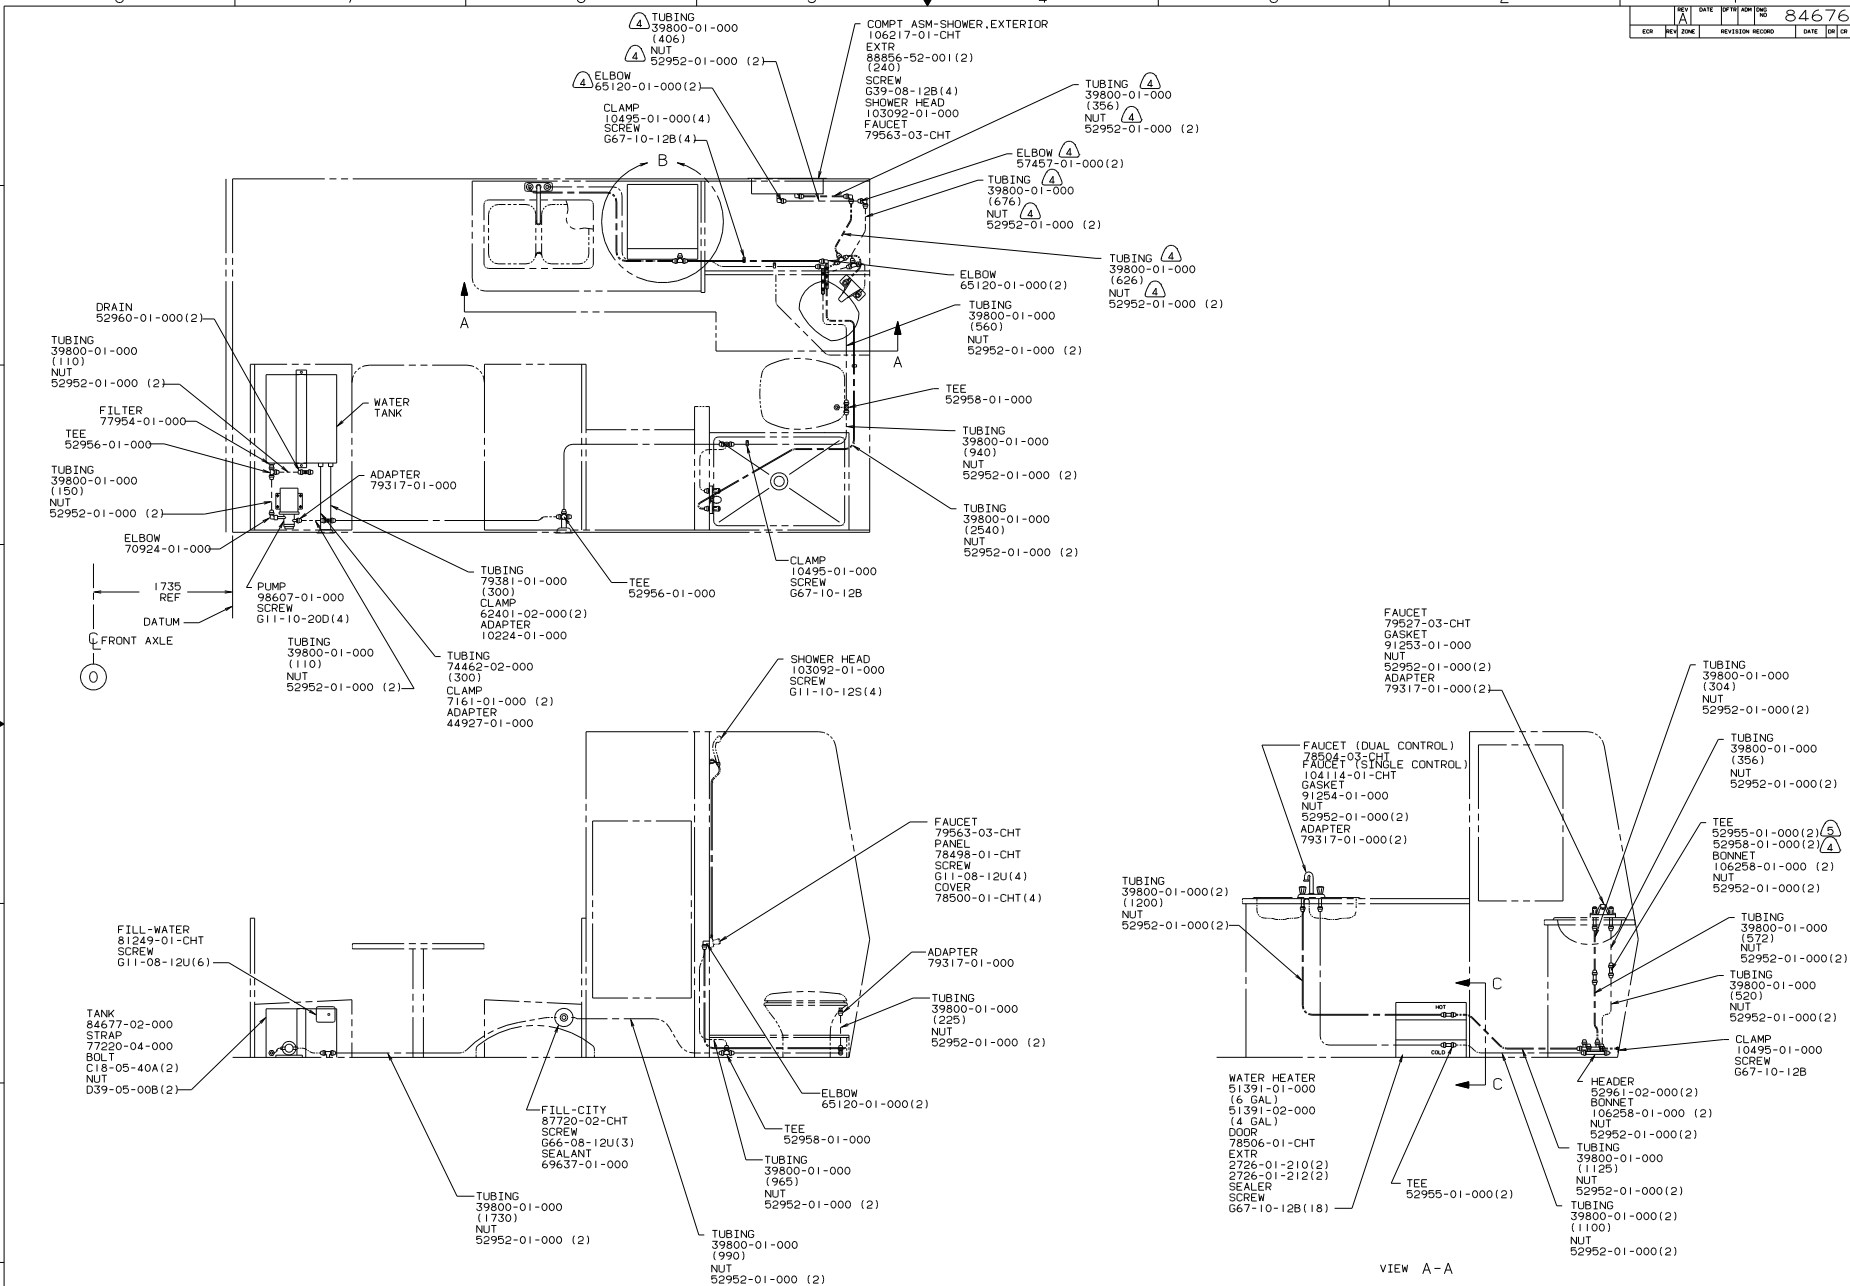

- ⑤ USE WITHOUT EXTERIOR SHOWER.
- ④ USE WITH EXTERIOR SHOWER.
- 3. ALL TUBING TO BE SECURED AT 1200 INTERVALS MAXIMUM, WITH CLAMP 10495-01-000 AND SCREW G67-10-12B.
- 2. PLASTIC FITTINGS TO BE SEALED WITH SEALANT 84456-01-000.
- 1. TUBING TO BE INSTALLED WITH SUFFICIENT SLOPE TO PROVIDE DRAINAGE TO NEAREST VALVE.

LEGEND



VIEW A-A


WINNEMAGO 86 W/1T319RB

DATE	UNSPECIFIED TOLERANCES ARE:	MATERIAL
DRW	WHOLE DIM (IN)	F
REV	ONE-PLACE (IN)	F
DATE	TWO-PLACE (IN)	F
DATE	THREE-PLACE (IN)	F
DATE	THREE-PLACE (IN)	F

LANE# _____ TITLE: WATER SYSTEM INSTL

WINNEMAGO

84676

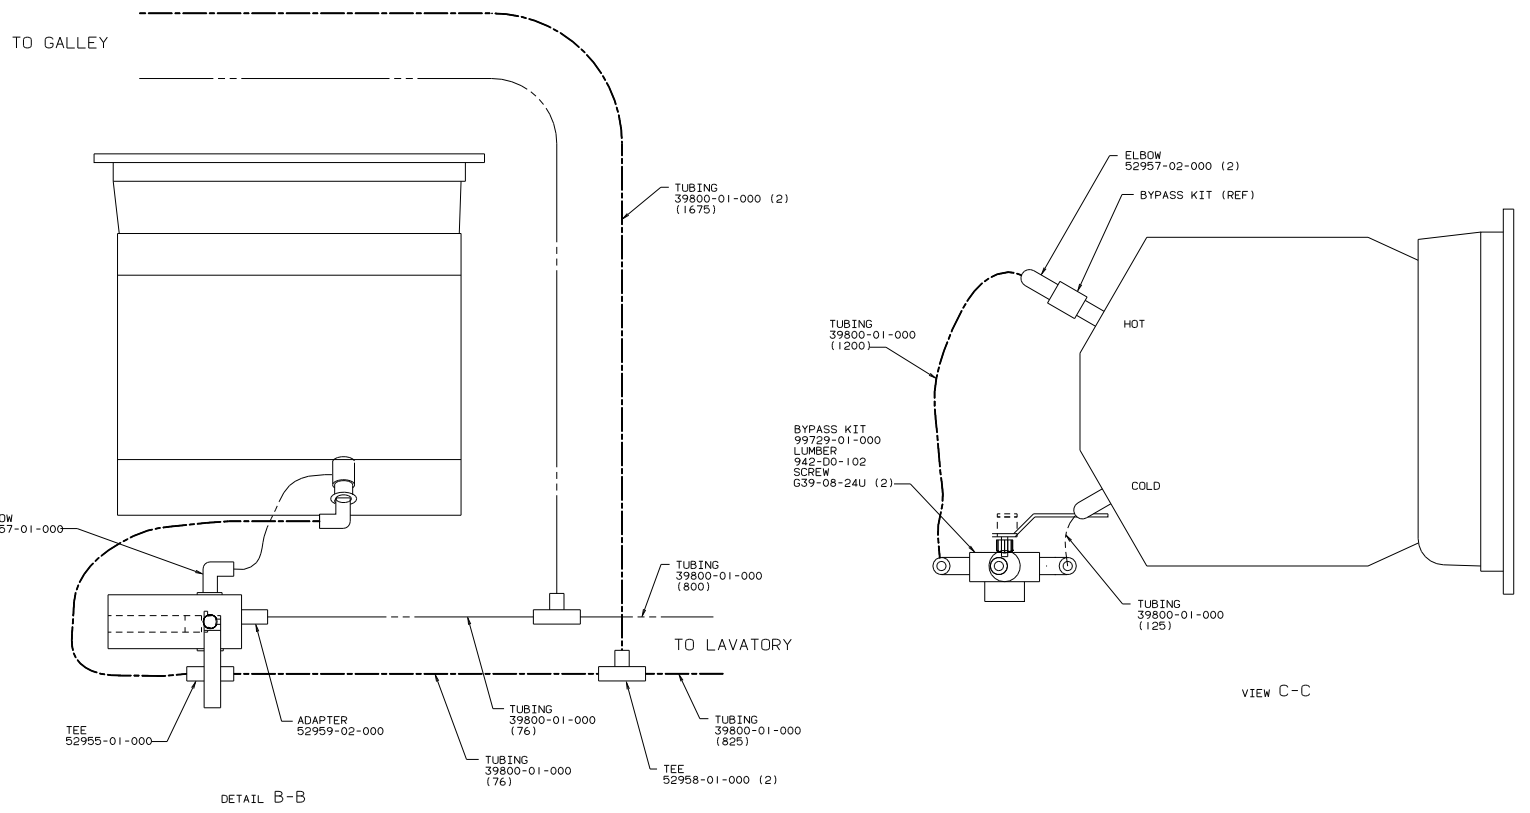

WATER HEATER BYPASS OPTION

TITLE: WATER SYSTEM INSTL	
30 MIL SCALE DRAWING	DATE
SHEET 2 OF 2	1 E 84676