

- 1/2" TUBING 39800-01-000 (230)
- NUT-1/2 52952-01-000(2)
- 1/2" TUBING 39800-01-000 (230)
- NUT-1/2 52952-01-000(2)
- WATER HEATER 51391-03-000(W/ELEC IGN)
- 51393-01-000(W/ELEC IGN & MOTOR/RAID)
- DOOR 78506-01-CHT
- EXTR 2726-01-210(2)
- 2726-01-212(2)
- SCREW 667-10-12B(18)
- SEALANT

- FAUCET 79527-03-CHT
- GASKET 91253-01-000
- ADAPTER-SWIVEL 1/2 TUBE X 1/2 FPT 79317-01-000(2)
- FAUCET 79563-03-CHT
- PANEL 78498-01-CHT
- SCREW G11-08-12B(4)
- COVER 78500-01-CHT(4)
- ELBOW-SWIVEL 1/2" 65120-01-000(2)

- FAUCET 103243-01-CHT
- ADAPTER-SWIVEL 1/2" TUBE X 1/2FPT 79317-01-000(2)
- 1/2" TUBING 39800-01-000 (2785)
- NUT-1/2 52952-01-000(2)

- 1/2" TUBING 39800-01-000 (2700)
- NUT-1/2 52952-01-000(2)

- 1/2" TUBING 39800-01-000 (1460)
- NUT-1/2 52952-01-000(2)

- 5/8" TUBING 39800-02-000 (1425)
- NUT-5/8 52952-02-000(2)
- ELBOW-5/8FL D 1/2MPT 55290-01-000

- FILL-CITY WATER 87720-02-CHT
- SCREW G66-08-12U(3)
- SEALANT
- ELBOW 55290-01-000


- FILL-GRAVITY 81249-01-CHT
- SCREW G66-08-12U(13)
- SEALANT

LEGEND	
HOT	----
COLD	-----


- Ⓜ DELETE WITH EXTERIOR SHOWER.
- Ⓜ TWIN BED OPTION.
- Ⓜ REQUIRED WITH EXTERIOR SHOWER.
- 3. ALL TUBING TO BE SECURED AT 1219 MAXIMUM SPACING WITH CLAMP 10495-01-000 AND SCREW G67-10-12B.
- 2. PLASTIC FITTINGS TO BE SEALED WITH SEALANT 84456-01-000.
- 1. TUBING TO BE INSTALLED WITH SUFFICIENT SLOPE TO PROVIDE DRAINAGE TO NEAREST VALVE.

NOTES:


WINNEMAGO 92 W/1F33R0	
DATE	UNSPECIFIED TOLERANCES ARE: MATERIAL:
CHP	ANGLE (DD) 1/2
DR	ONE-PLATE (IN. IN) 1/16
FR	TWO-PLATE (IN. IN) 1/32
FIN	ANGLE
CON	THRU ANGLE PROJECTION
LANP F33R02	TITLE: WATER SYSTEM INSTL
DIA #	SCALE: NONE
DO NOT SCALE DRAWING	SIZE: DWG
ALL DIMENSIONS ARE IN MILLIMETERS	SHEET 1 OF 2
	1 E 10

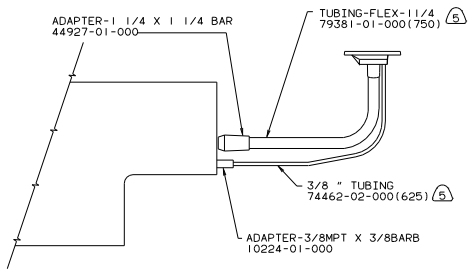

DETAIL "A"
TWIN BED OPTION W/ WATER FILL

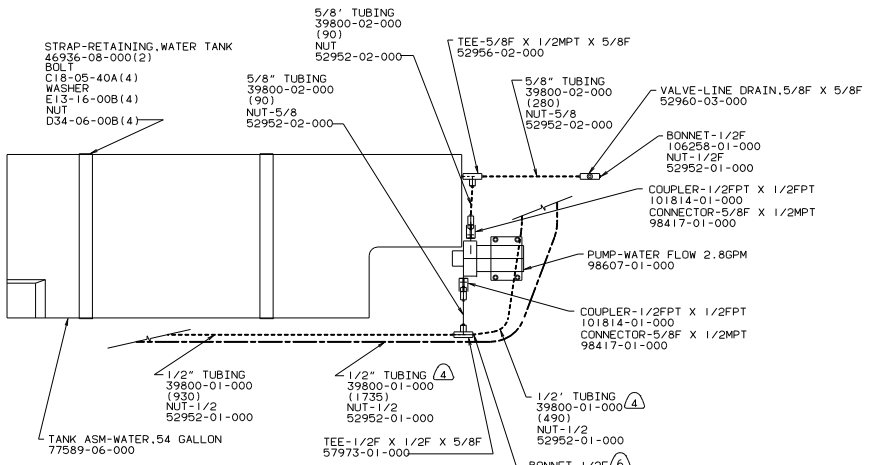

DETAIL "A"
TWIN BED OPT W/ WATER PUMP

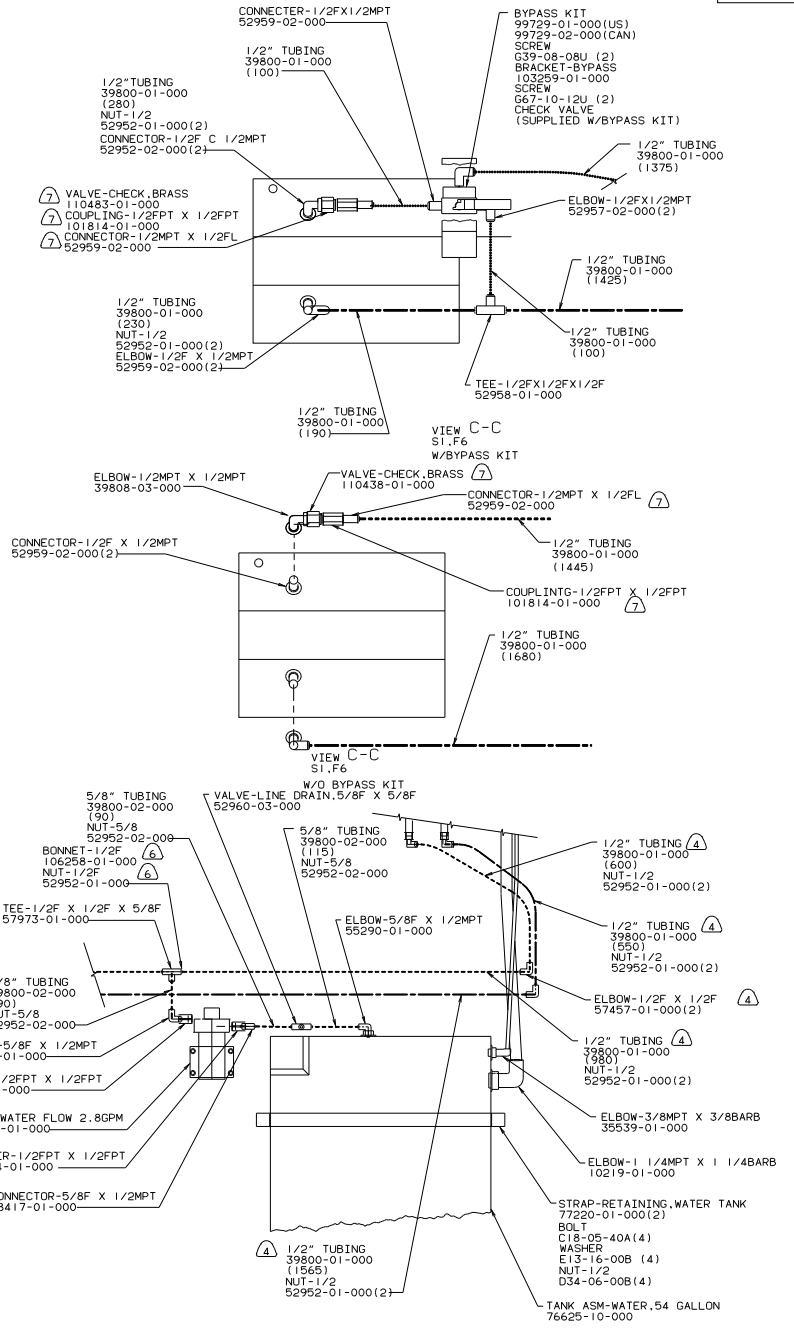

DETAIL "A"
W/QUEEN BED OPTION

TITLE:		WATER SYSTEM INSTL	
30	NO. SHEETS	2	OF 2
1	SHEET NO.	2	OF 2
DATE:		106425	