


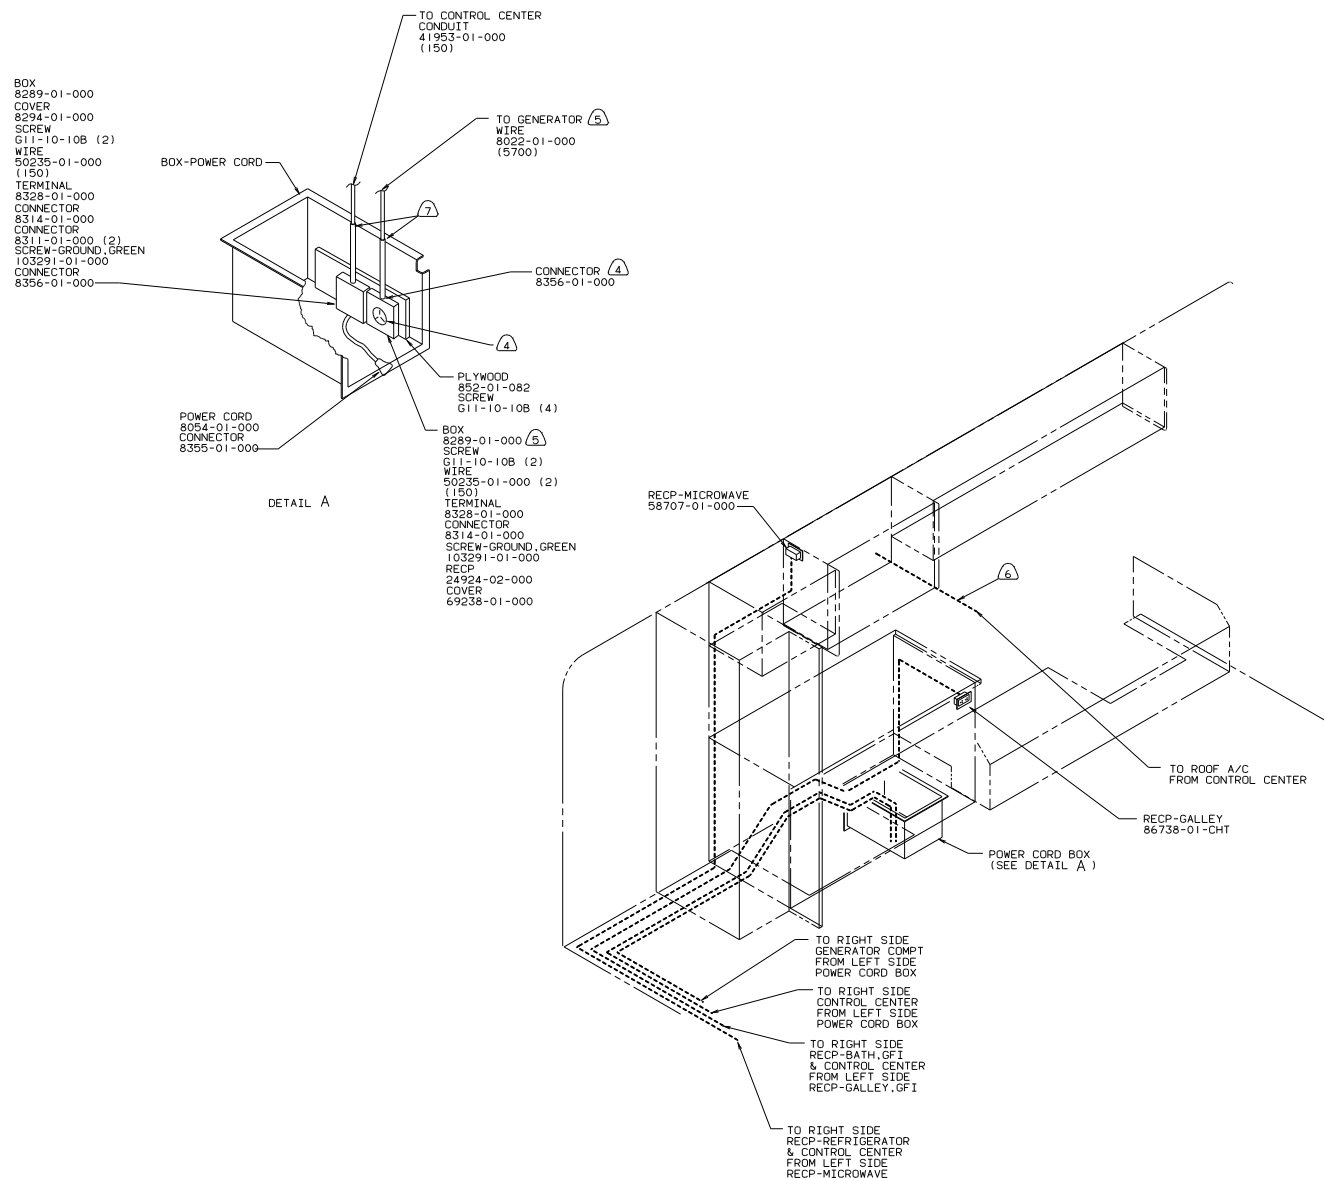


- 7 SEAL OPENING IN FLOOR.
 6 USE WITH ROOF A/C, ROUTE THRU CONDUIT IN ROOF ASM.
 5 USE WITH GENERATOR ONLY.
 4 INSTALL RECEPTACLE WITH GROUND TOWARD OUTBOARD SIDE OF VEHICLE.
 3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES, USE SCREW G67-10-12B.
 1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

110V (US)
 (LEFT SIDE)


WINNIEAGO 93 D22RB	
QTY	UNSPECIFIED TOLERANCES ARE:
CHD	WHOLE DIM (IN) ±
F/E	ONE-PLACE (IN) ±
M/E	TWO-PLACE (IN) ±
CON	THIRD ANGLE PROJECTION
TITLE: WIRING INSTL-BODY	
DATE: 10/10/06	SCALE: 1/8" = 1"
SHEET 1 OF 10	
109780	



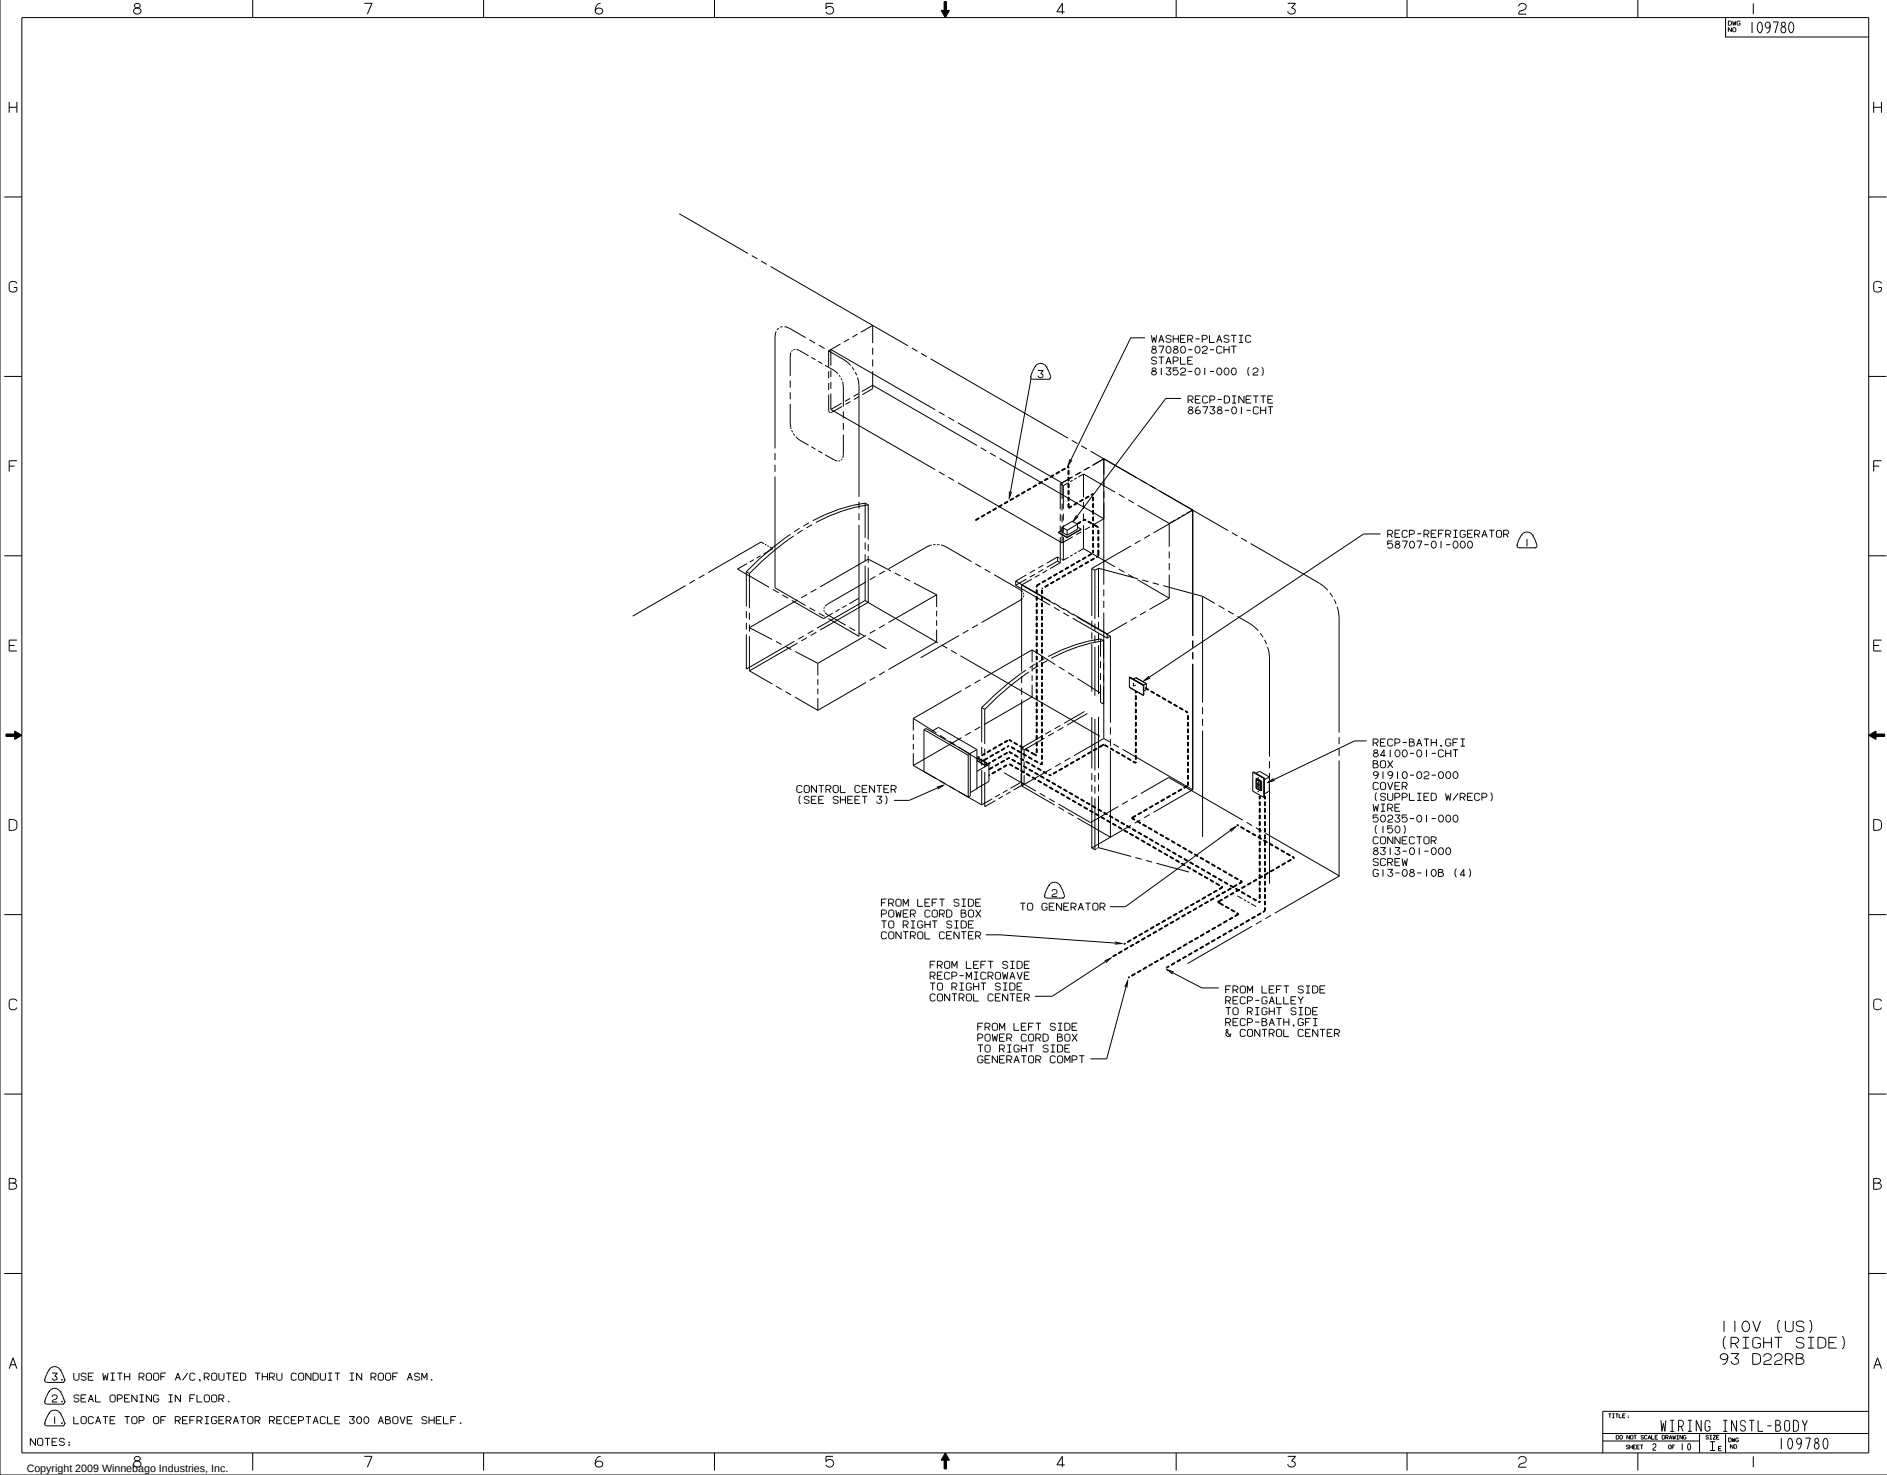


110V (US)
(RIGHT SIDE)
93 D22RB

- NOTES:
- ③ USE WITH ROOF A/C,ROUTED THRU CONDUIT IN ROOF ASM.
 - ② SEAL OPENING IN FLOOR.
 - ① LOCATE TOP OF REFRIGERATOR RECEPTACLE 300 ABOVE SHELF.

TITLE: WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	ENG NO	109780
SHEET 2 OF 10	1		

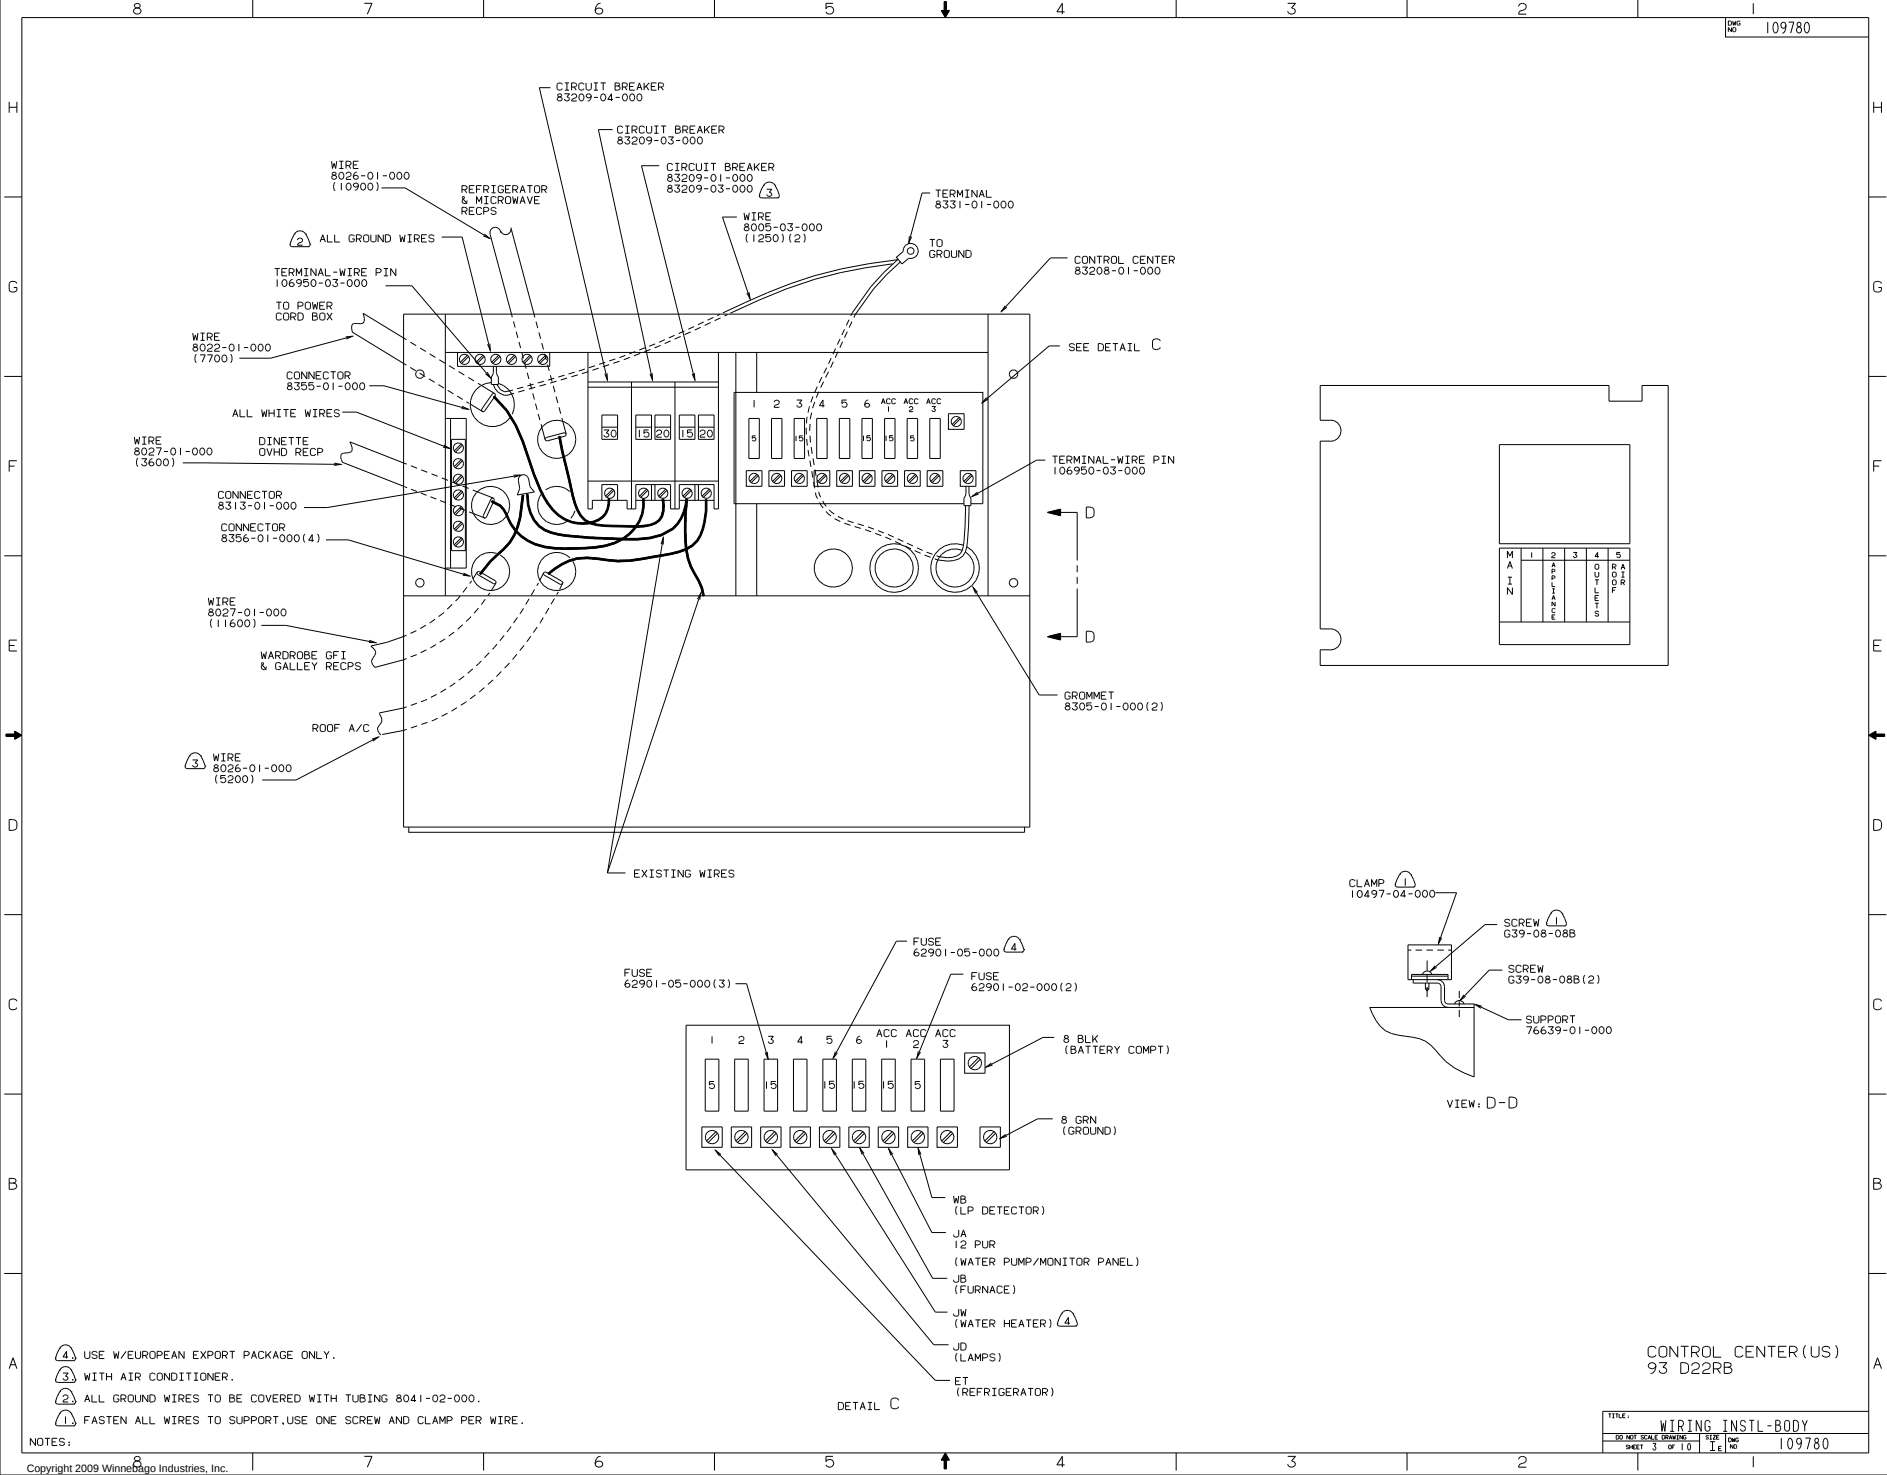

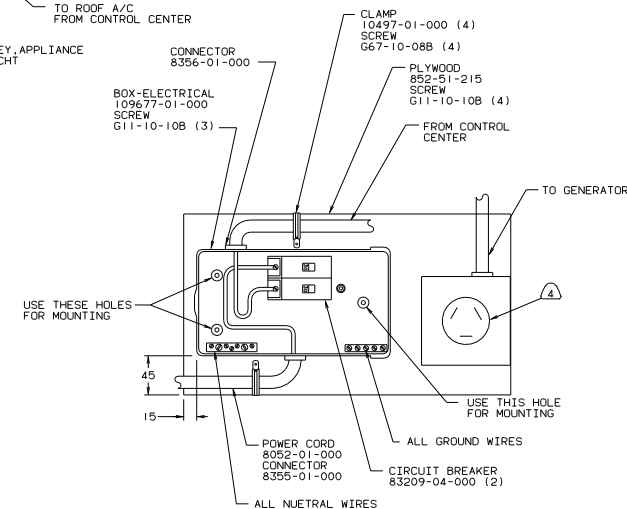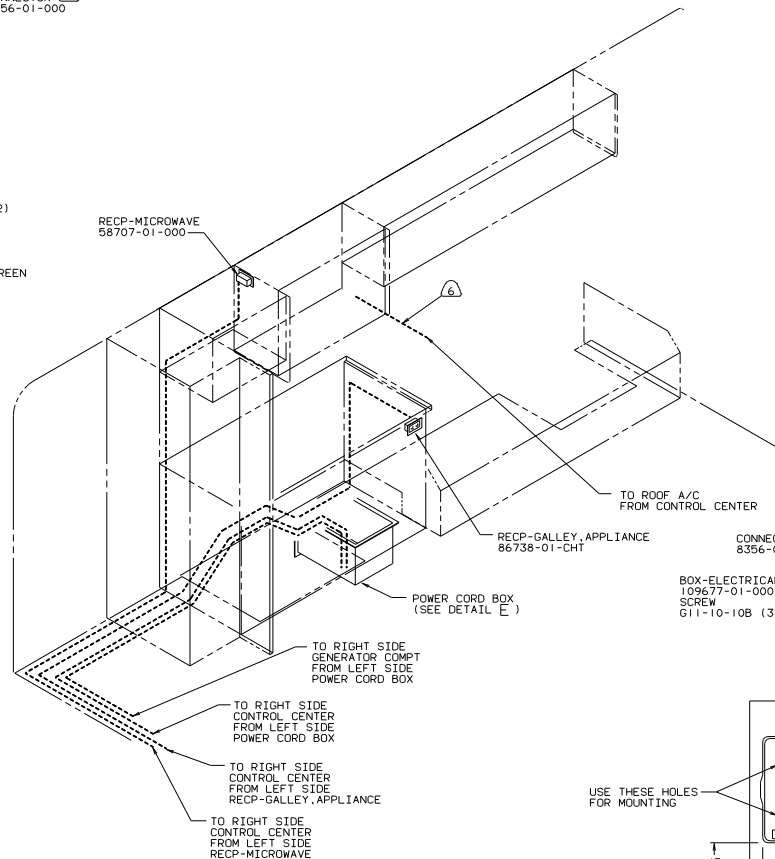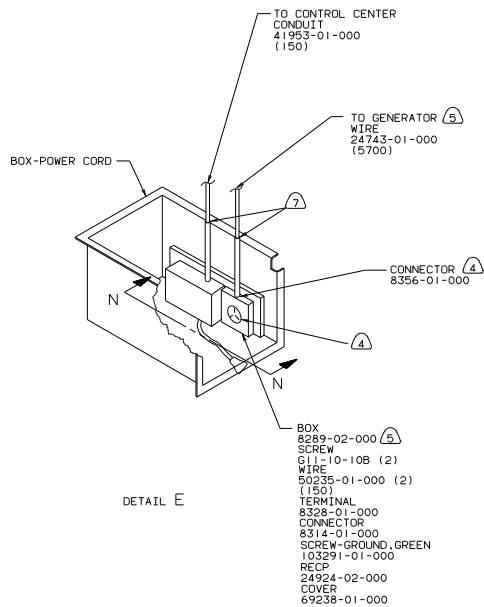


7. SEAL OPENING IN FLOOR.
6. USE WITH ROOF A/C ROUTED THRU CONDUIT IN ROOF ASM.
5. USE WITH GENERATOR ONLY.
4. INSTALL RECEPTACLE WITH GROUND TOWARD OUTBOARD SIDE OF VEHICLE.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES, USE SCREW G67-10-12B.
1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

VIEW N-N

110V (CAN)
(LEFT SIDE)
93 D22RB


TITLE: WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	ING	NO
SHEET 4 OF 10	1	1	1
109780			

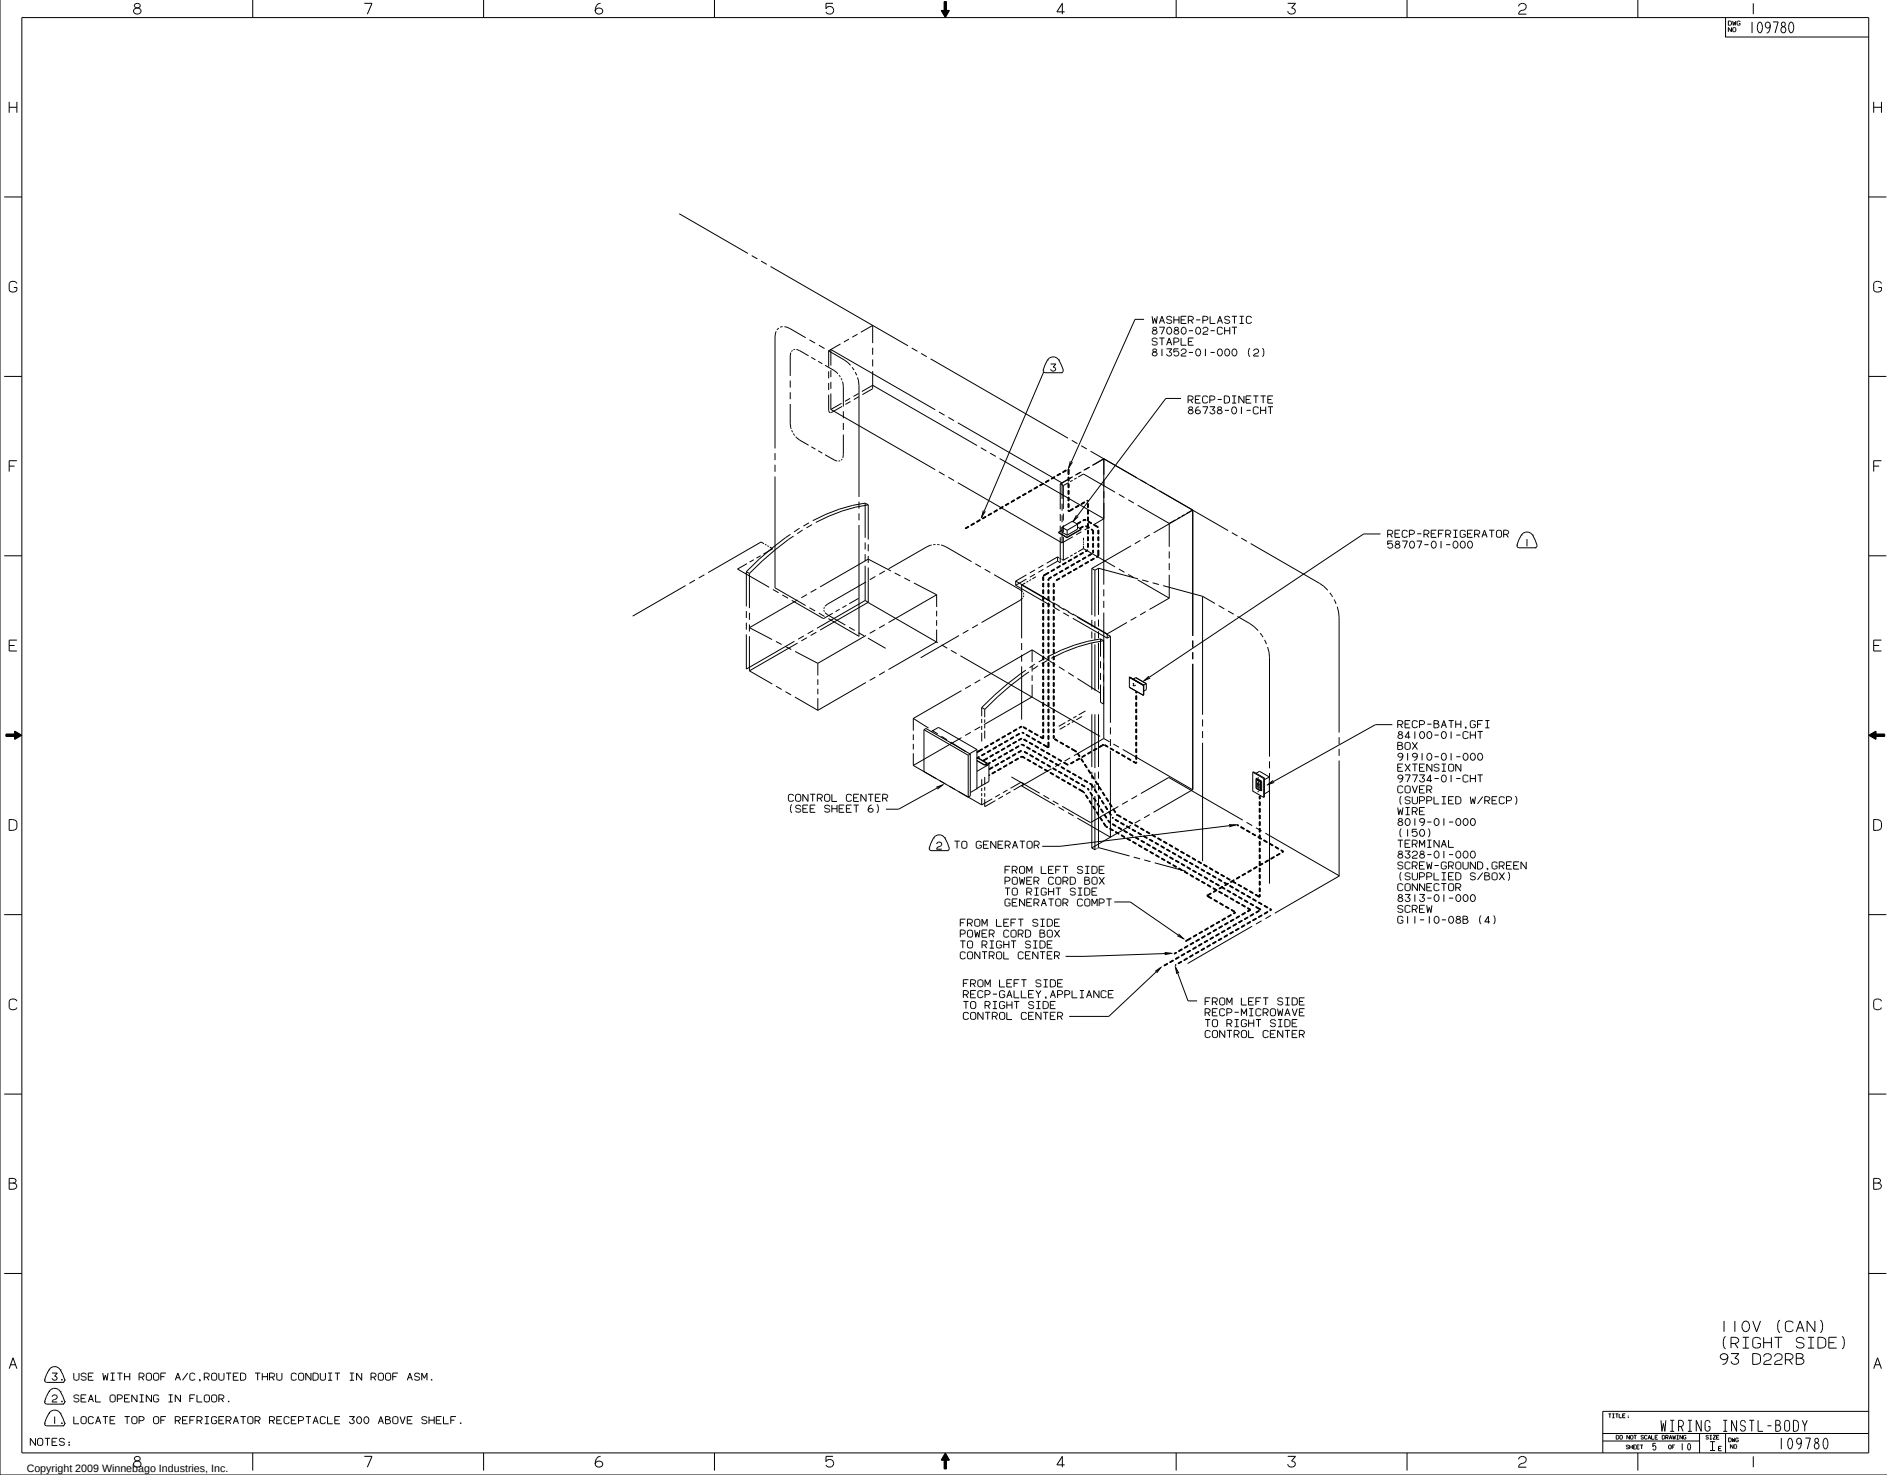

- NOTES:
- ③ USE WITH ROOF A/C, ROUTED THRU CONDUIT IN ROOF ASM.
 - ② SEAL OPENING IN FLOOR.
 - ① LOCATE TOP OF REFRIGERATOR RECEPTACLE 300 ABOVE SHELF.

110V (CAN)
(RIGHT SIDE)
93 D22RB

TITLE: WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	ING	NO
SHEET 5 OF 10	1	1	109780

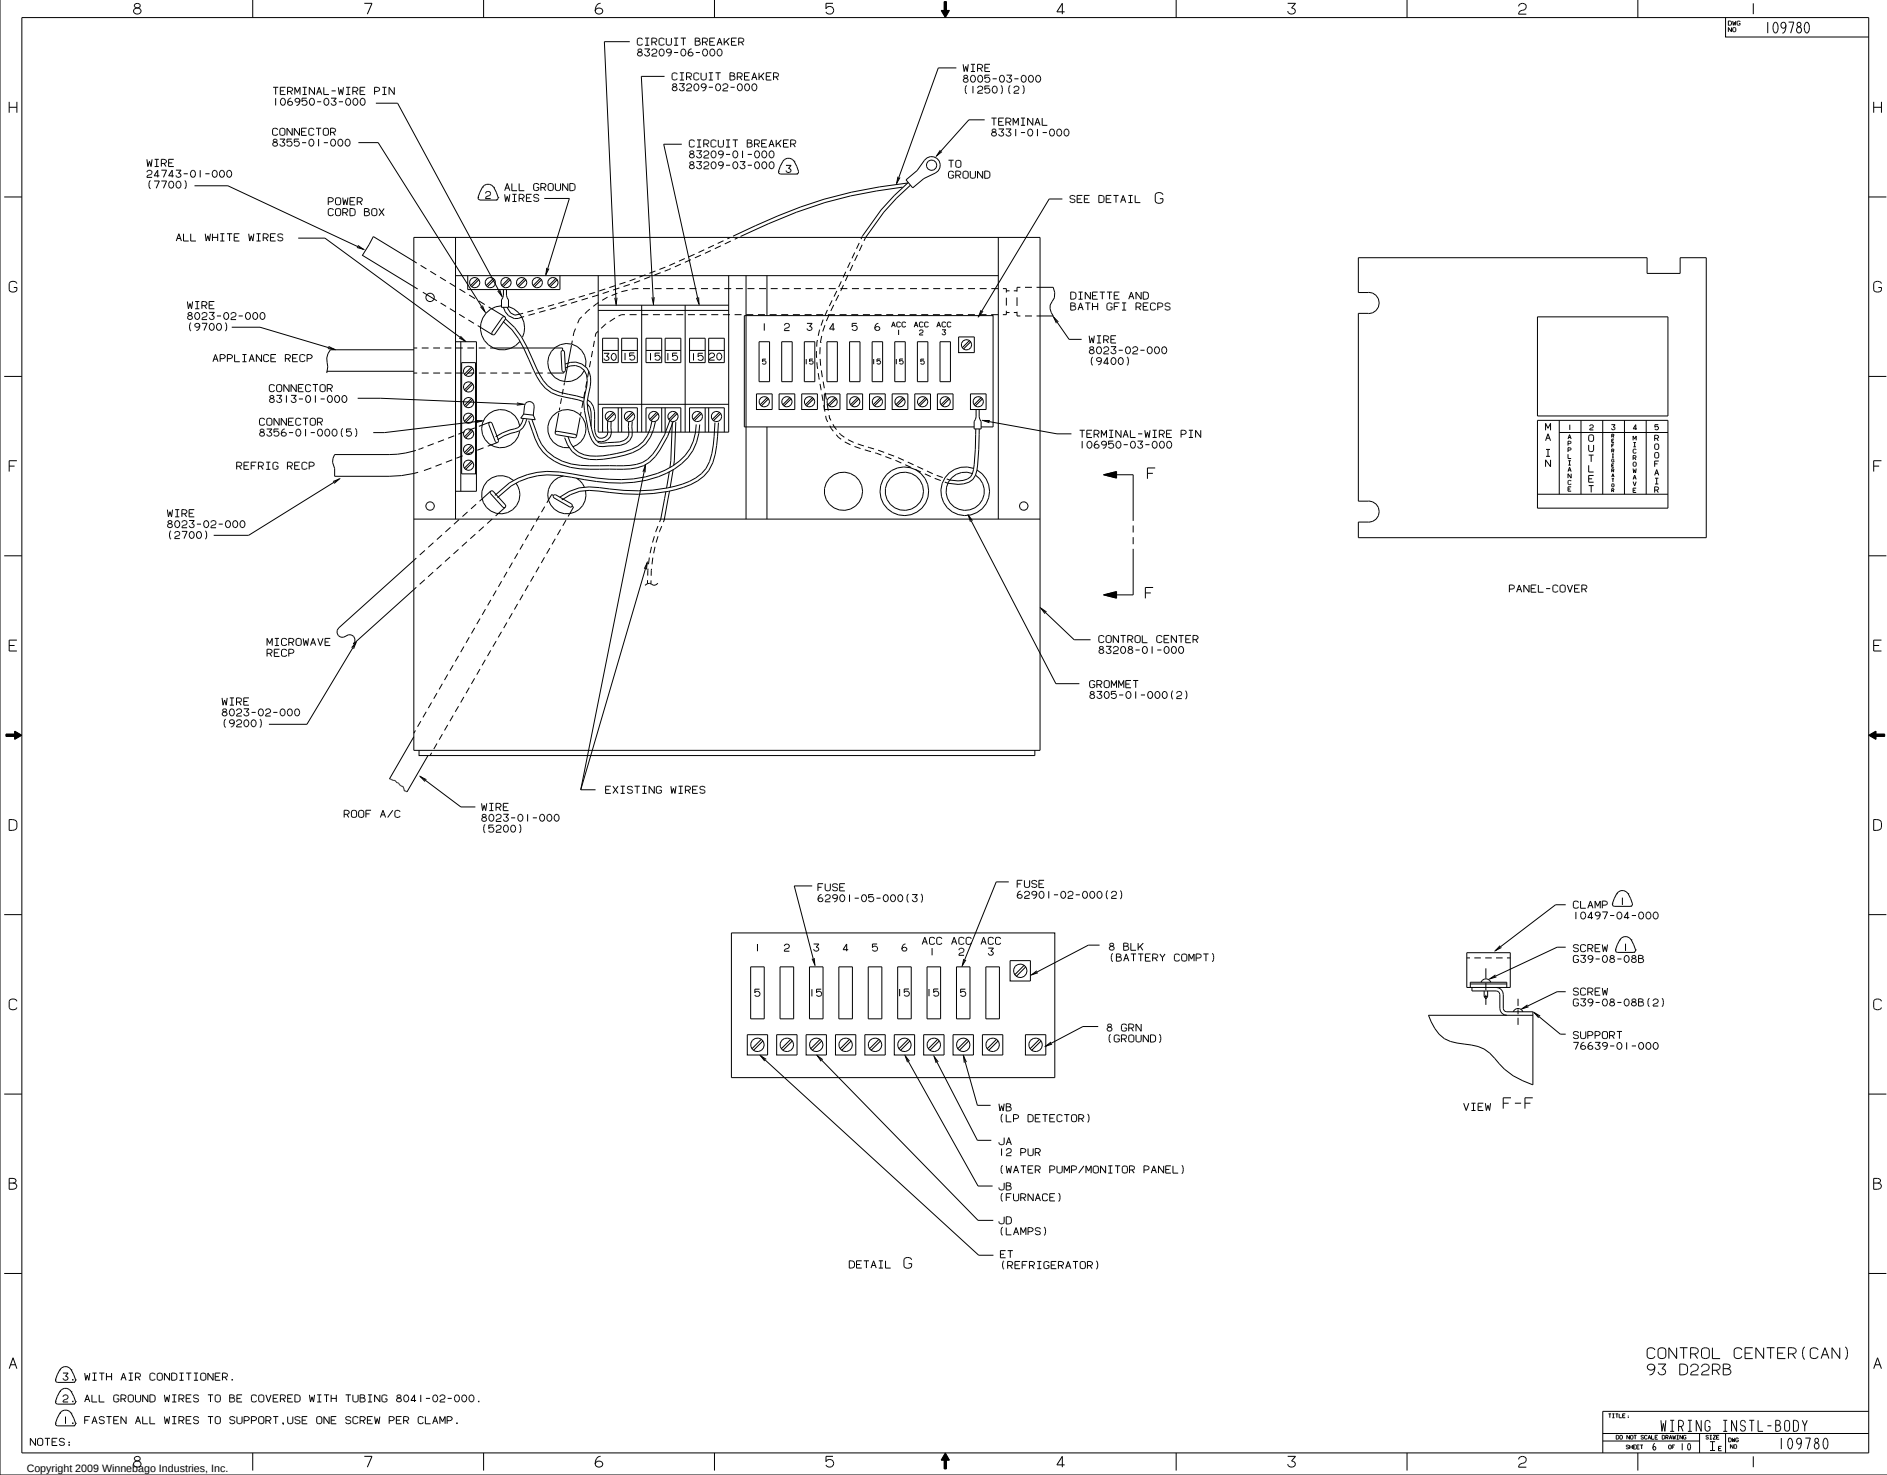





NOTES:

- ③ WITH AIR CONDITIONER.
- ② ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
- ① FASTEN ALL WIRES TO SUPPORT, USE ONE SCREW PER CLAMP.

CONTROL CENTER (CAN)
93 D22RB

WIRING INSTL-BODY
SHEET 6 OF 10
109780

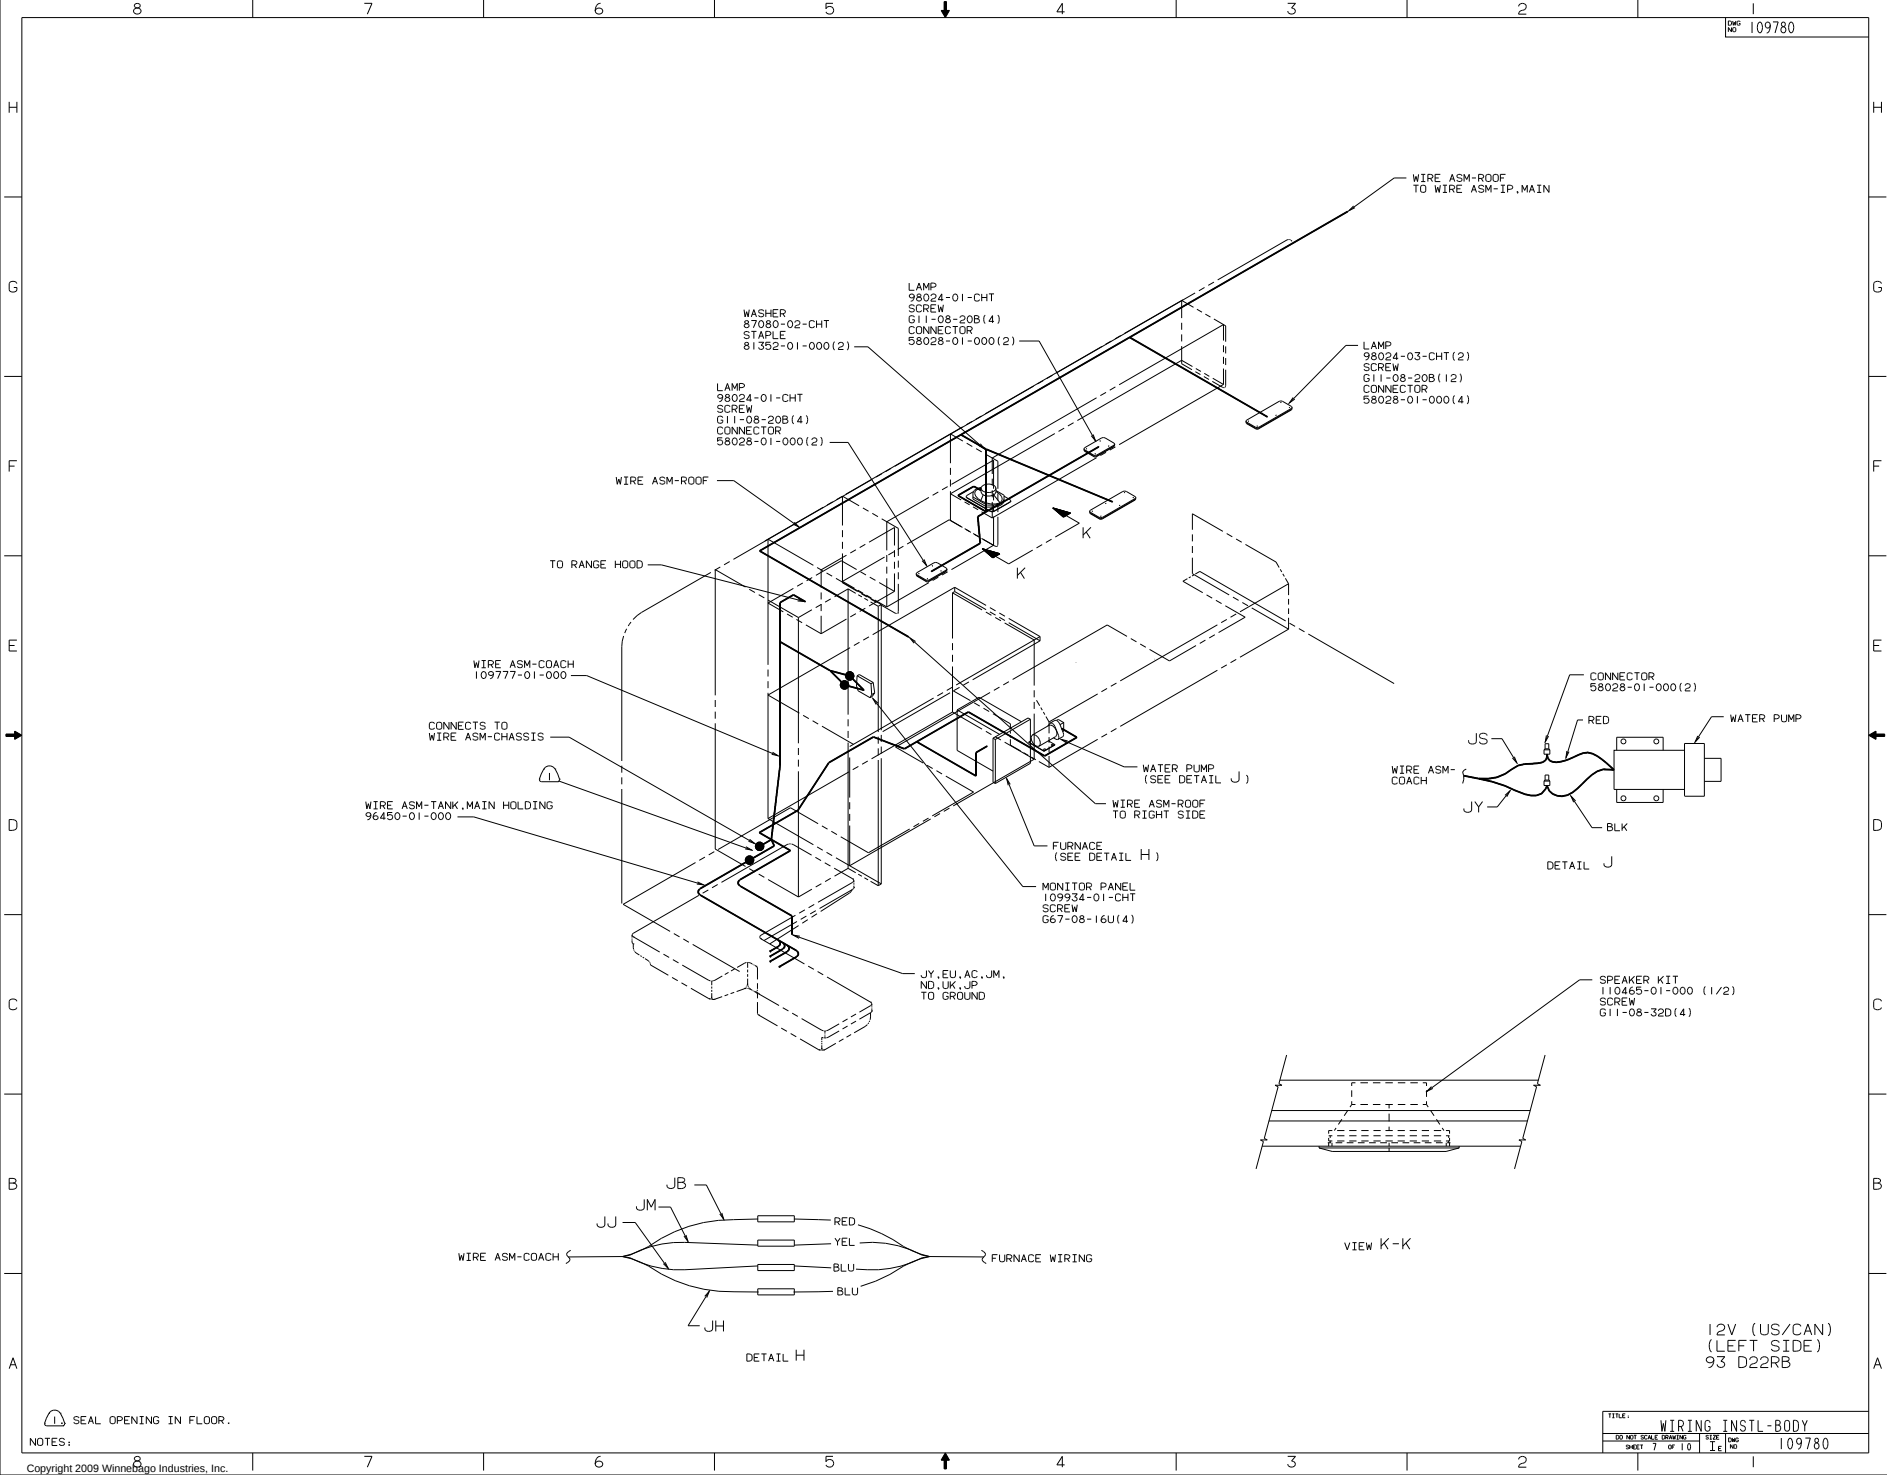


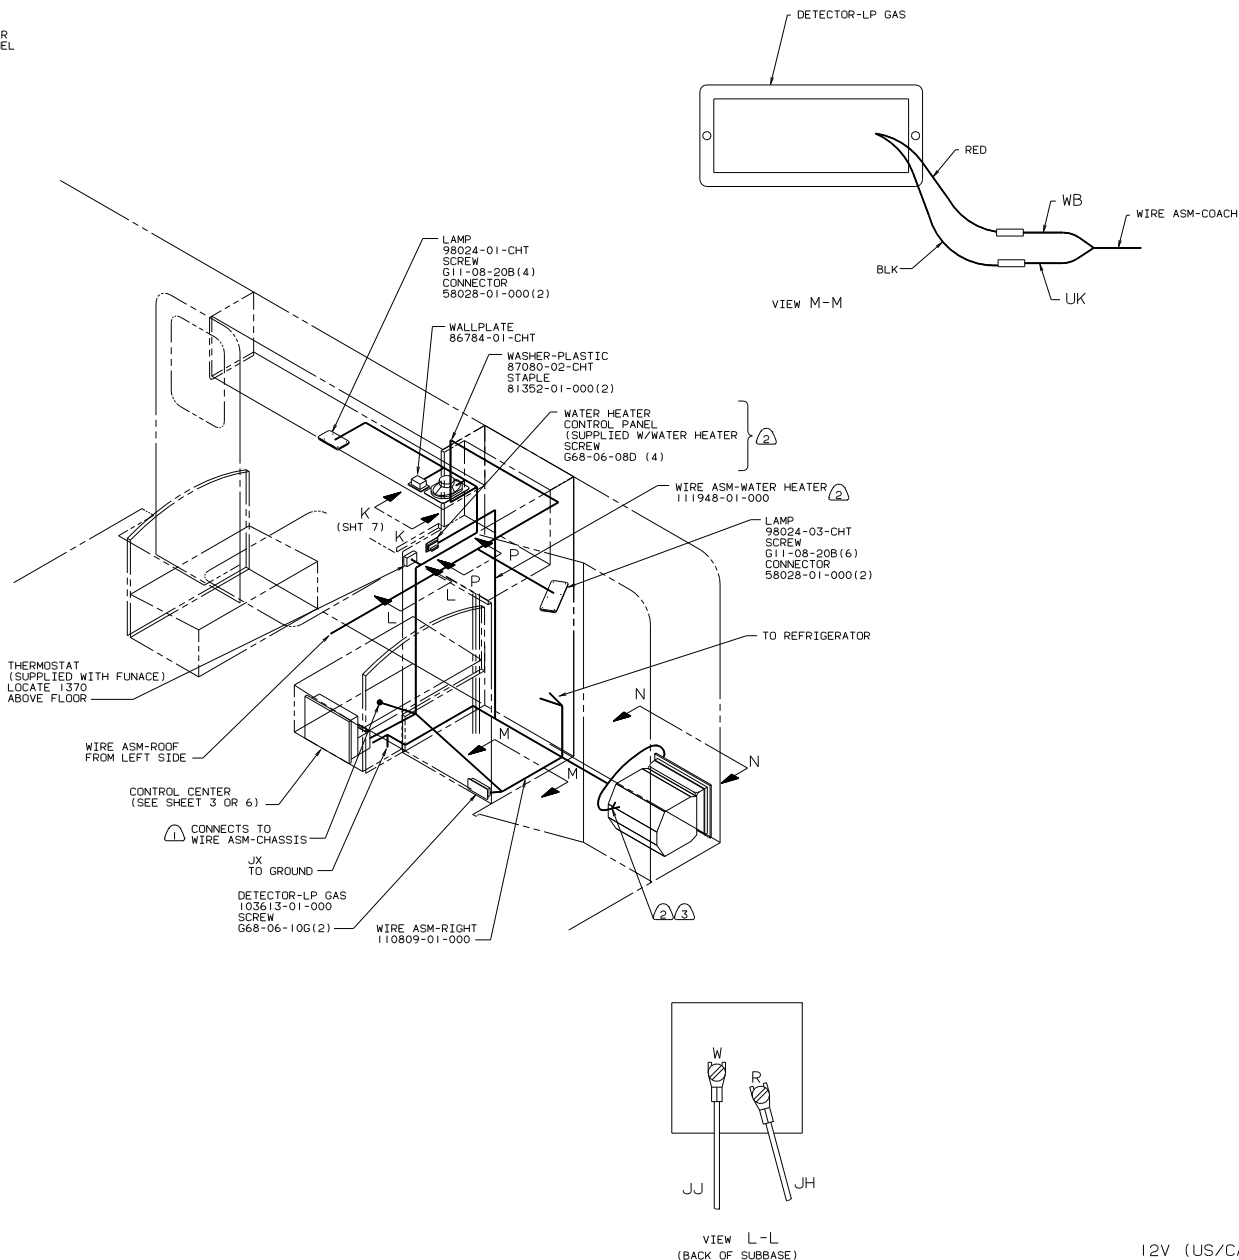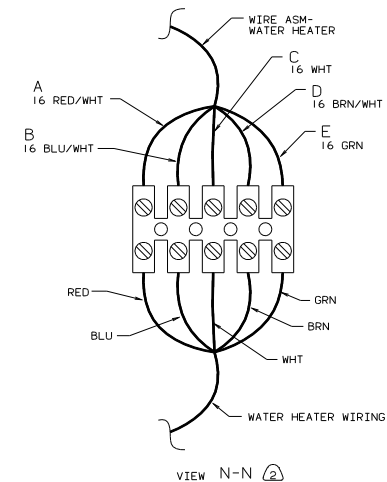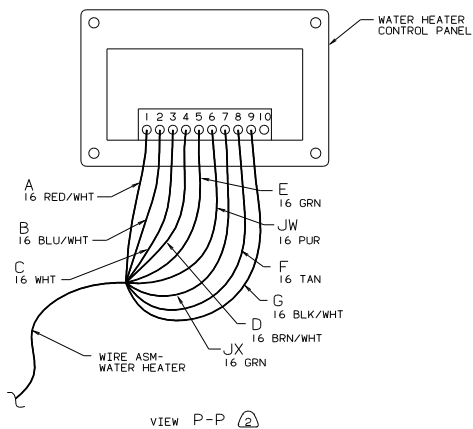

12V (US/CAN)
(RIGHT SIDE)
93 D22RB

3. CONNECT WIRE F (16 TAN) TO BRN WIRE AND WIRE G (16 BLK/WHT) TO BLU WIRE
2. USE W/EUROPEAN EXPORT PACKAGE ONLY.
1. SEAL OPENING IN FLOOR.

NOTES:

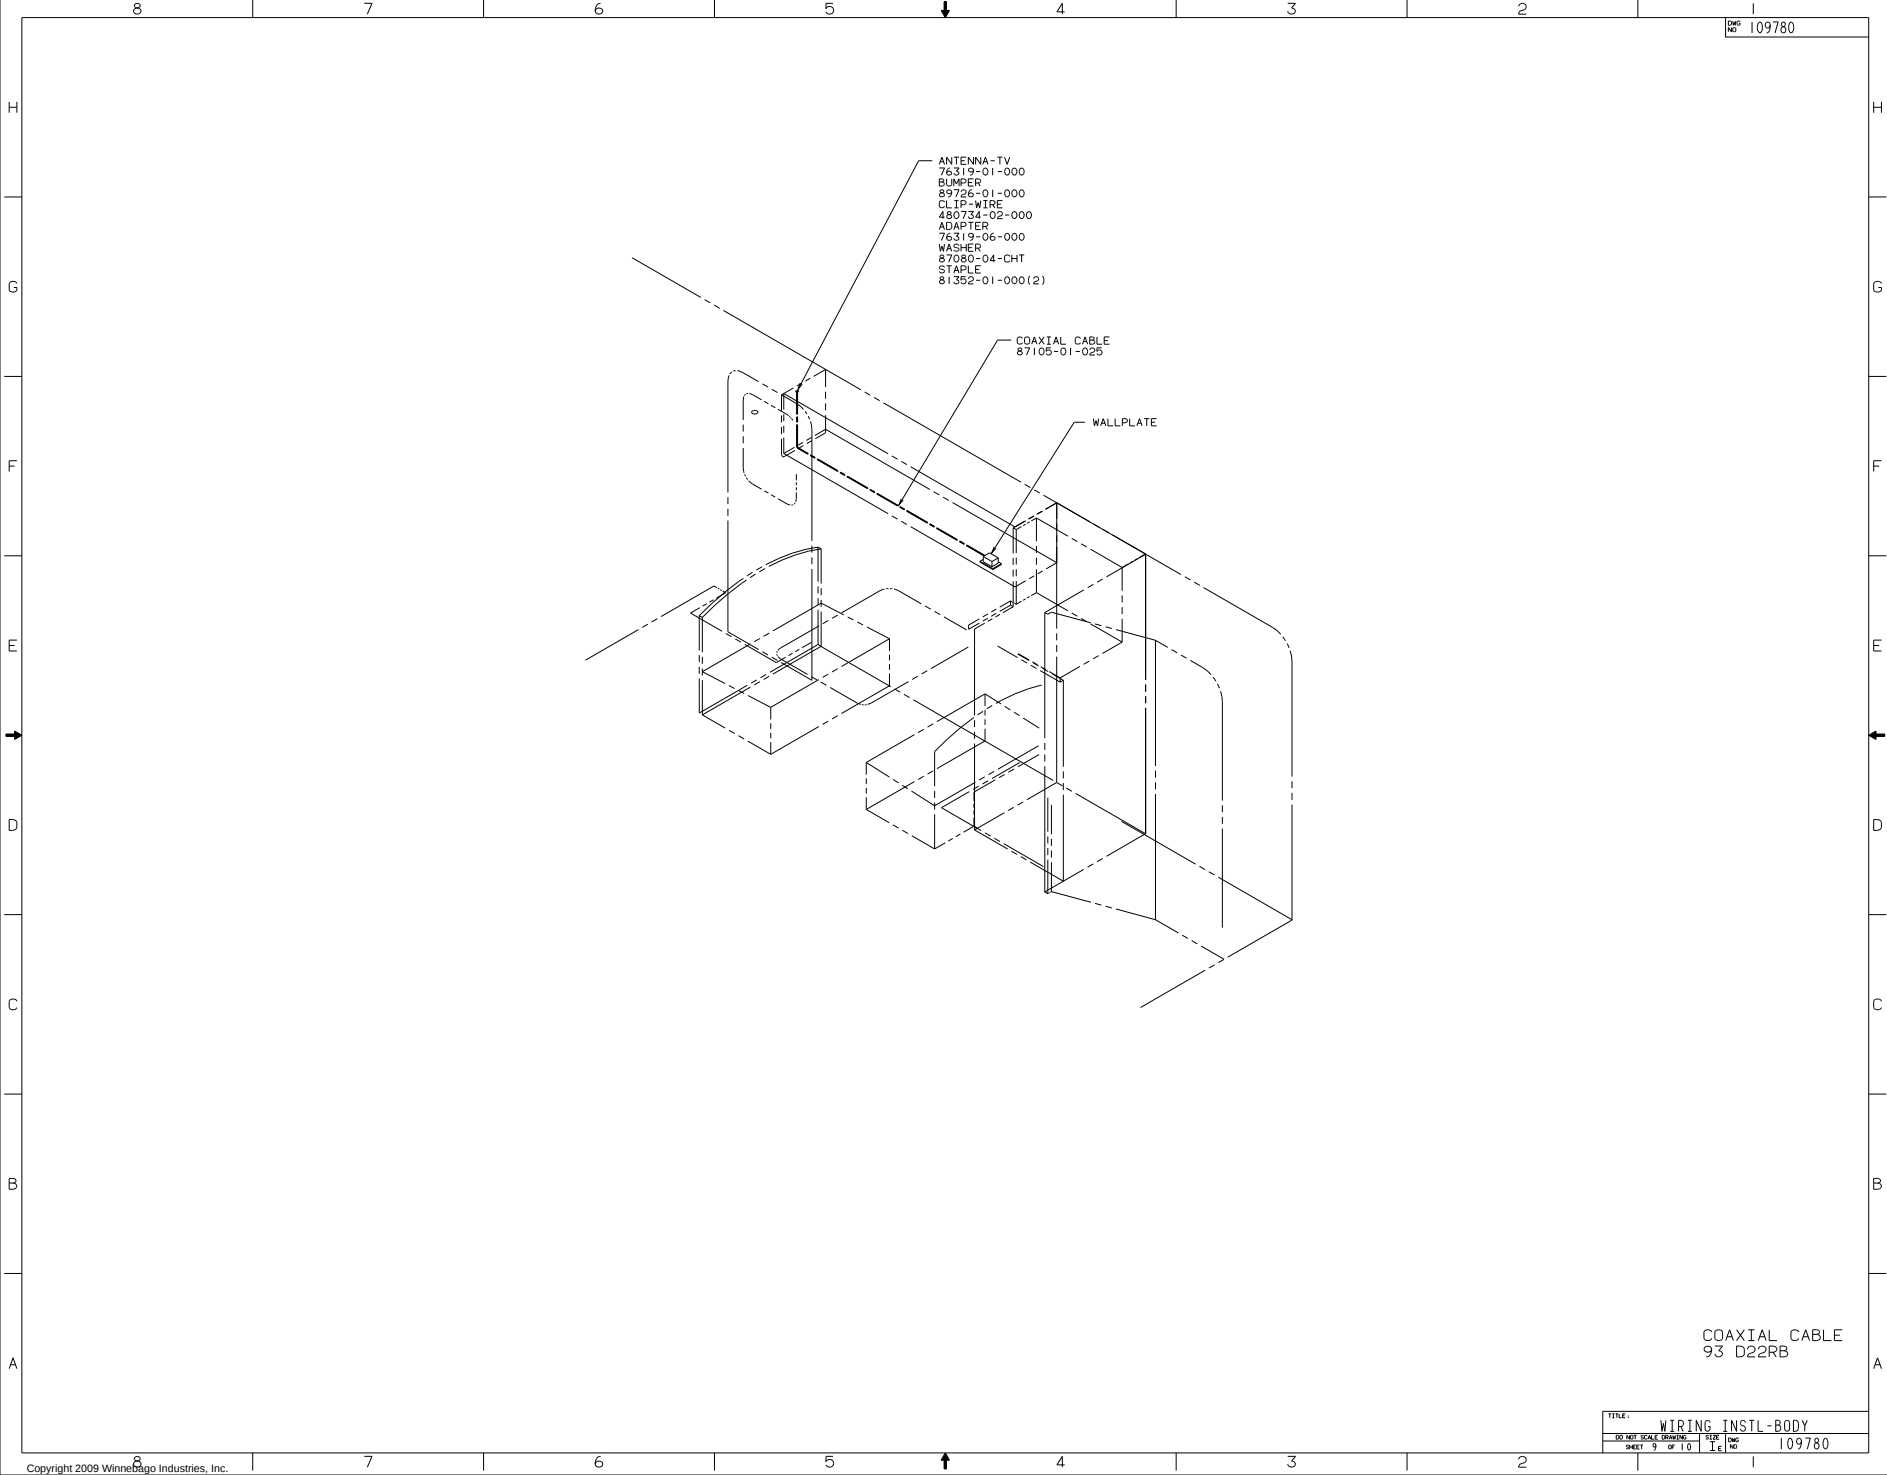


ANTENNA-TV
76319-01-000
BUMPER
89726-01-000
CLIP-WIRE
480734-02-000
ADAPTER
76319-06-000
WASHER
87080-04-CHT
STAPLE
81352-01-000(2)

COAXIAL CABLE
87105-01-025

WALLPLATE

COAXIAL CABLE
93 D22RB

TITLE		WIRING INSTL-BODY	
DO NOT SCALE DRAWING	FILE	ENG NO	109780
SHEET 9 OF 10	1E		



- NOTES: