
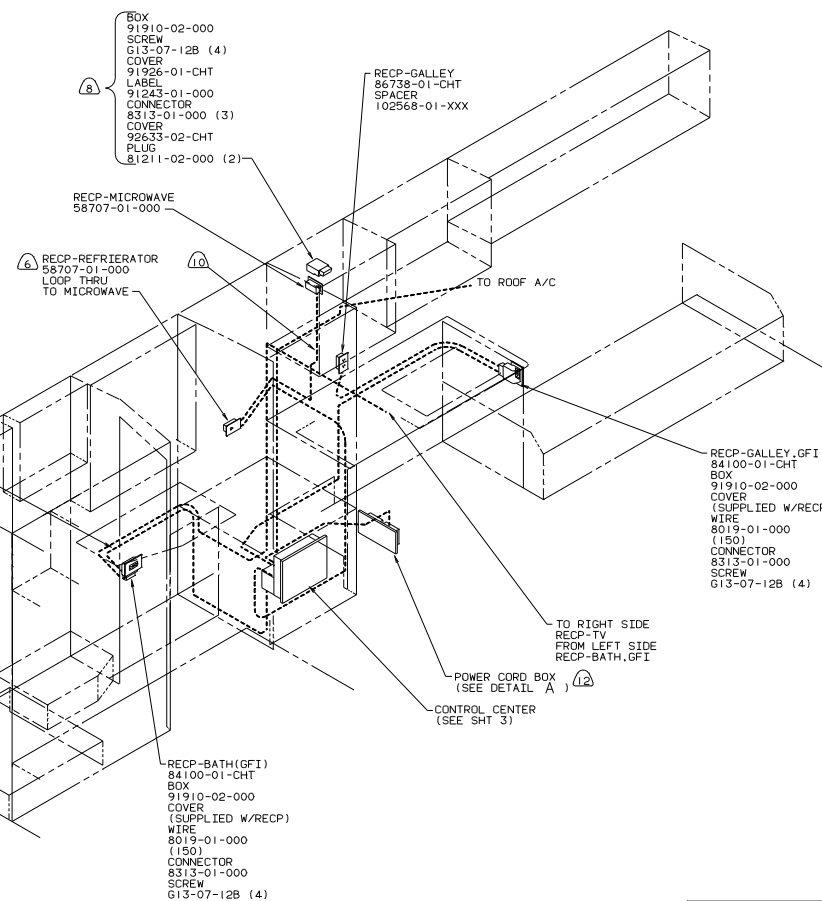


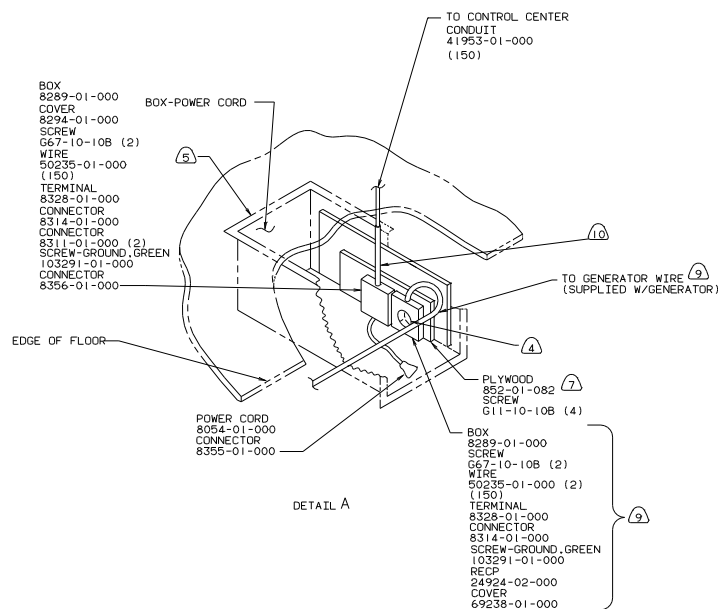


12. SEE GENERATOR INSTALLATION FOR ADDITIONAL INFORMATION
11. SEAL ALL HOLES THROUGH FLOOR.
10. APPLY MINIMUM DIAMETER CONDUIT 41953-01-02, -03, -08-000 AS REQUIRED.
9. USE WITH GENERATOR ONLY.
8. USE WITHOUT ROOF AIR CONDITIONER.
7. PAINT EXPOSED SURFACES BLACK WITH 106112-01-000.
6. LOCATE TOP OF REFRIGERATOR RECEPTACLE 300 ABOVE SHELF.
5. SEE BODY INSTL-DOORS & COMPARTMENTS FOR ADDITIONAL INFORMATION.
4. INSTALL RECEPTACLE WITH GROUND TOWARD OUTBOARD SIDE OF VEHICLE.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

110V LEFT (US)

WINNERAGO 95 F28RC	
QTY	UNSPECIFIED TOLERANCES ARE
CHD	ONE-PLATE (18.81)
W	ONE-PLATE (18.81)
H	ONE-PLATE (18.81)
CON	THIRD ANGLE PROJECTION
LAWT F27RC5 TITLE: WIRING INSTL-BODY	
DIA #	SCALE: NONE
ALL DIMENSIONS ARE IN MILLIMETERS	SHEET 1 OF 13
REF 111544	115779

TO FRONT
ENTERTAINMENT
CENTER RECP

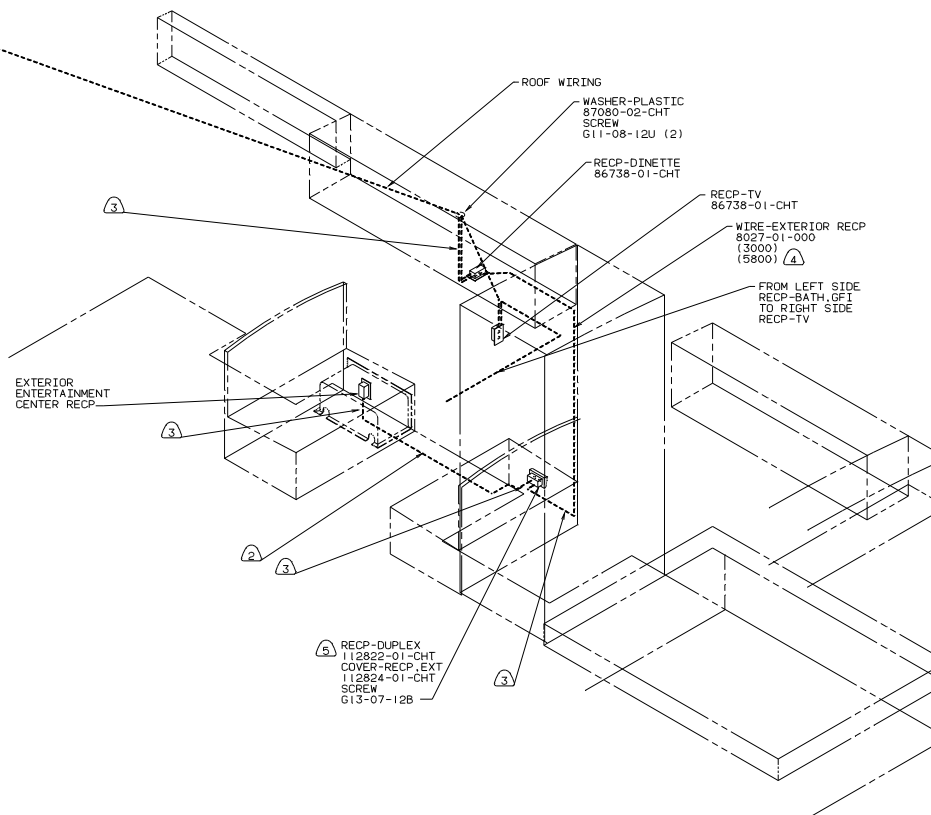

⑤ SEAL BACK SIDE OF RECP FACE.

④ USE WITH EXTERIOR ENTERTAINMENT CENTER.

③ APPLY MINIMUM DIAMETER CONDUIT 41953-01, -02, -07, -08 AS REQUIRED.




② ROUTED IN FLOOR.

1. CLAMP WIRE WITH CLAMP 83609-01-000 AND SCREW G11-08-12B EVERY 600.

NOTES:

110V RIGHT (US)
95 F28RC


TITLE: WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	ING NO	115779
SHEET 2 OF 13	1		

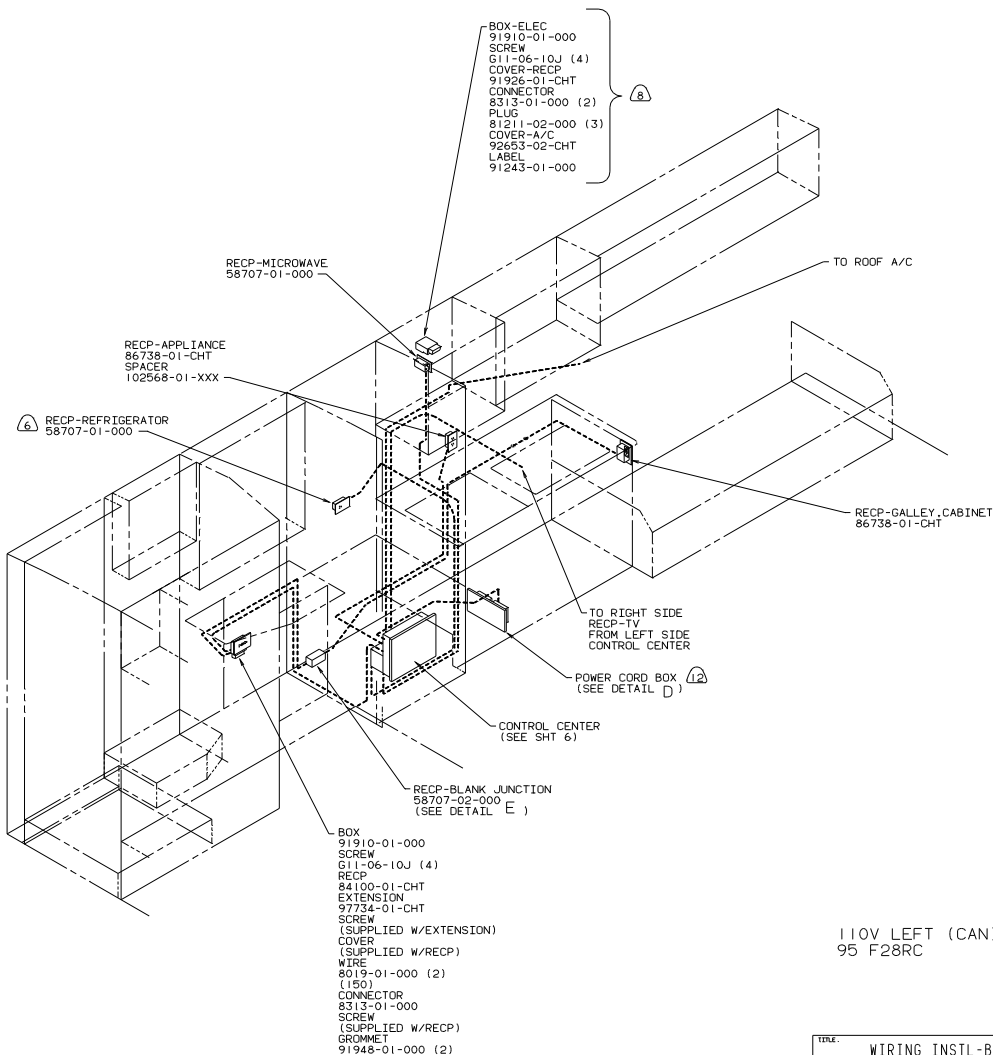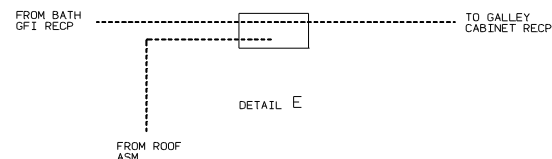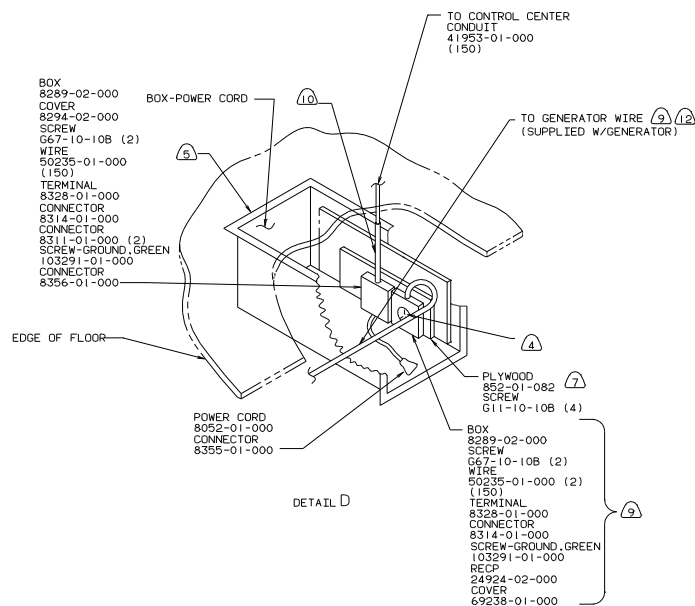

- 12 SEE GENERATOR INSTALLATION FOR ADDITIONAL INFORMATION
11. SEAL ALL HOLES THROUGH FLOOR.
- 10 APPLY MINIMUM DIAMETER CONDUIT 41953-01,-02,-03,-08,-000 AS REQUIRED.
- 9 USE WITH GENERATOR ONLY.
- 8 USE WITHOUT ROOF AIR CONDITIONER.
- 7 PAINT EXPOSED SURFACES BLACK WITH 106112-01-000.
- 6 LOCATE TOP OF REFRIGERATOR RECEPTACLE 300 ABOVE SHELF.
- 5 SEE BODY INSTL-DOORS & COMPTS FOR MORE INFORMATION.
- 4 INSTALL RECEPTACLE WITH GROUND TOWARD OUTBOARD SIDE OF VEHICLE.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

110V LEFT (CAN)
95 F28RC

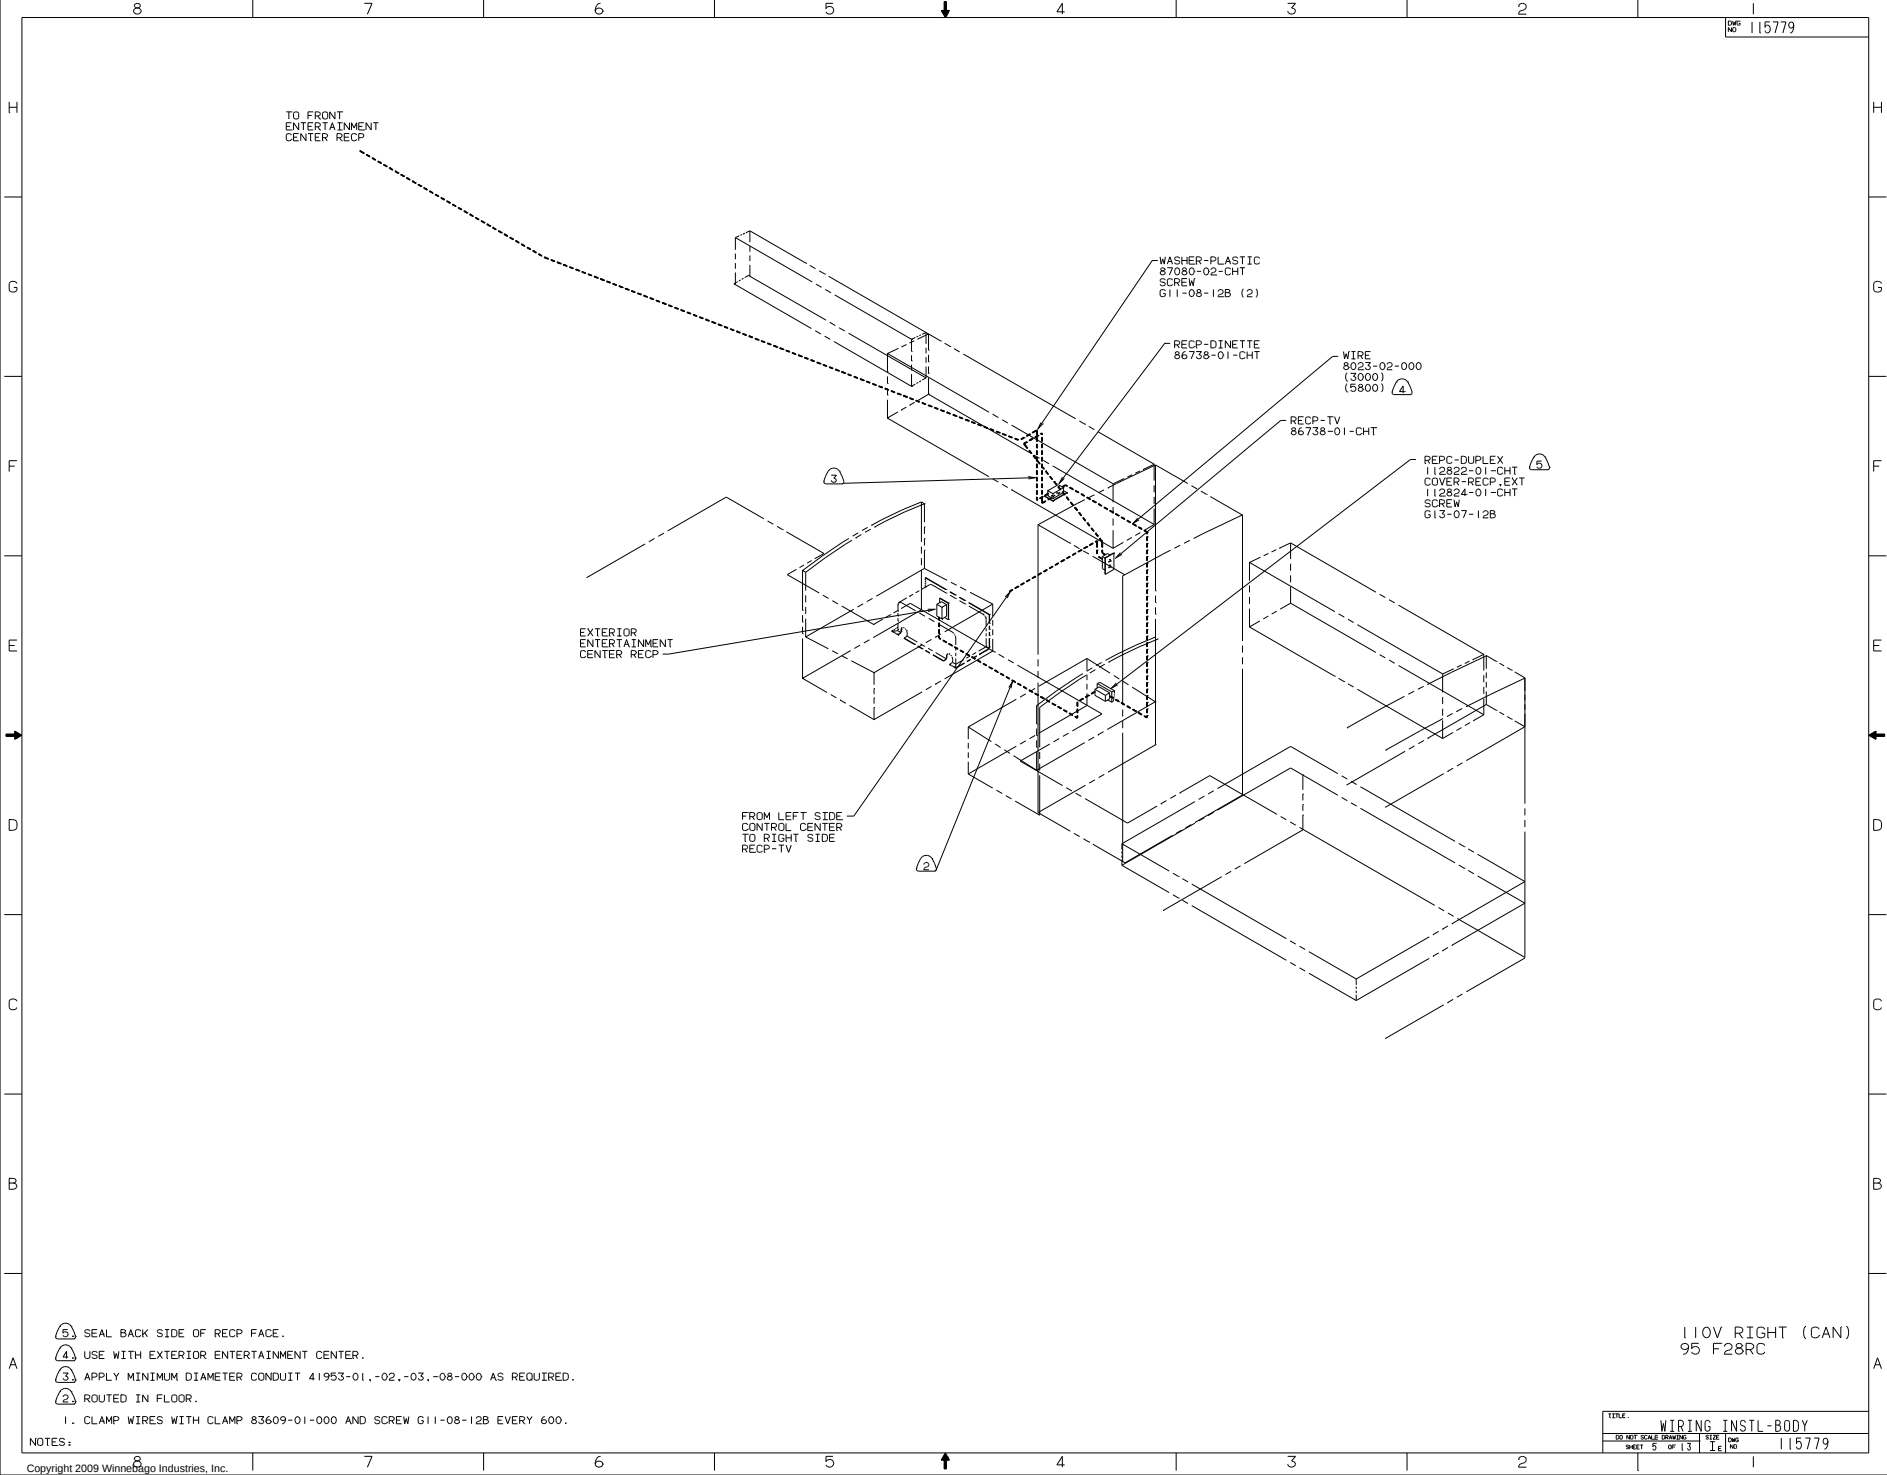

5. SEAL BACK SIDE OF RECP FACE.
4. USE WITH EXTERIOR ENTERTAINMENT CENTER.
3. APPLY MINIMUM DIAMETER CONDUIT 41953-01,-02,-03,-08-000 AS REQUIRED.
2. ROUTED IN FLOOR.


1. CLAMP WIRES WITH CLAMP 83609-01-000 AND SCREW G11-08-12B EVERY 600.

NOTES:

110V RIGHT (CAN)
95 F28RC


TITLE		WIRING INSTL-BODY	
DO NOT SCALE DRAWING	FILE	ENG	NO
SHEET 5 OF 13	1	1	1

115779

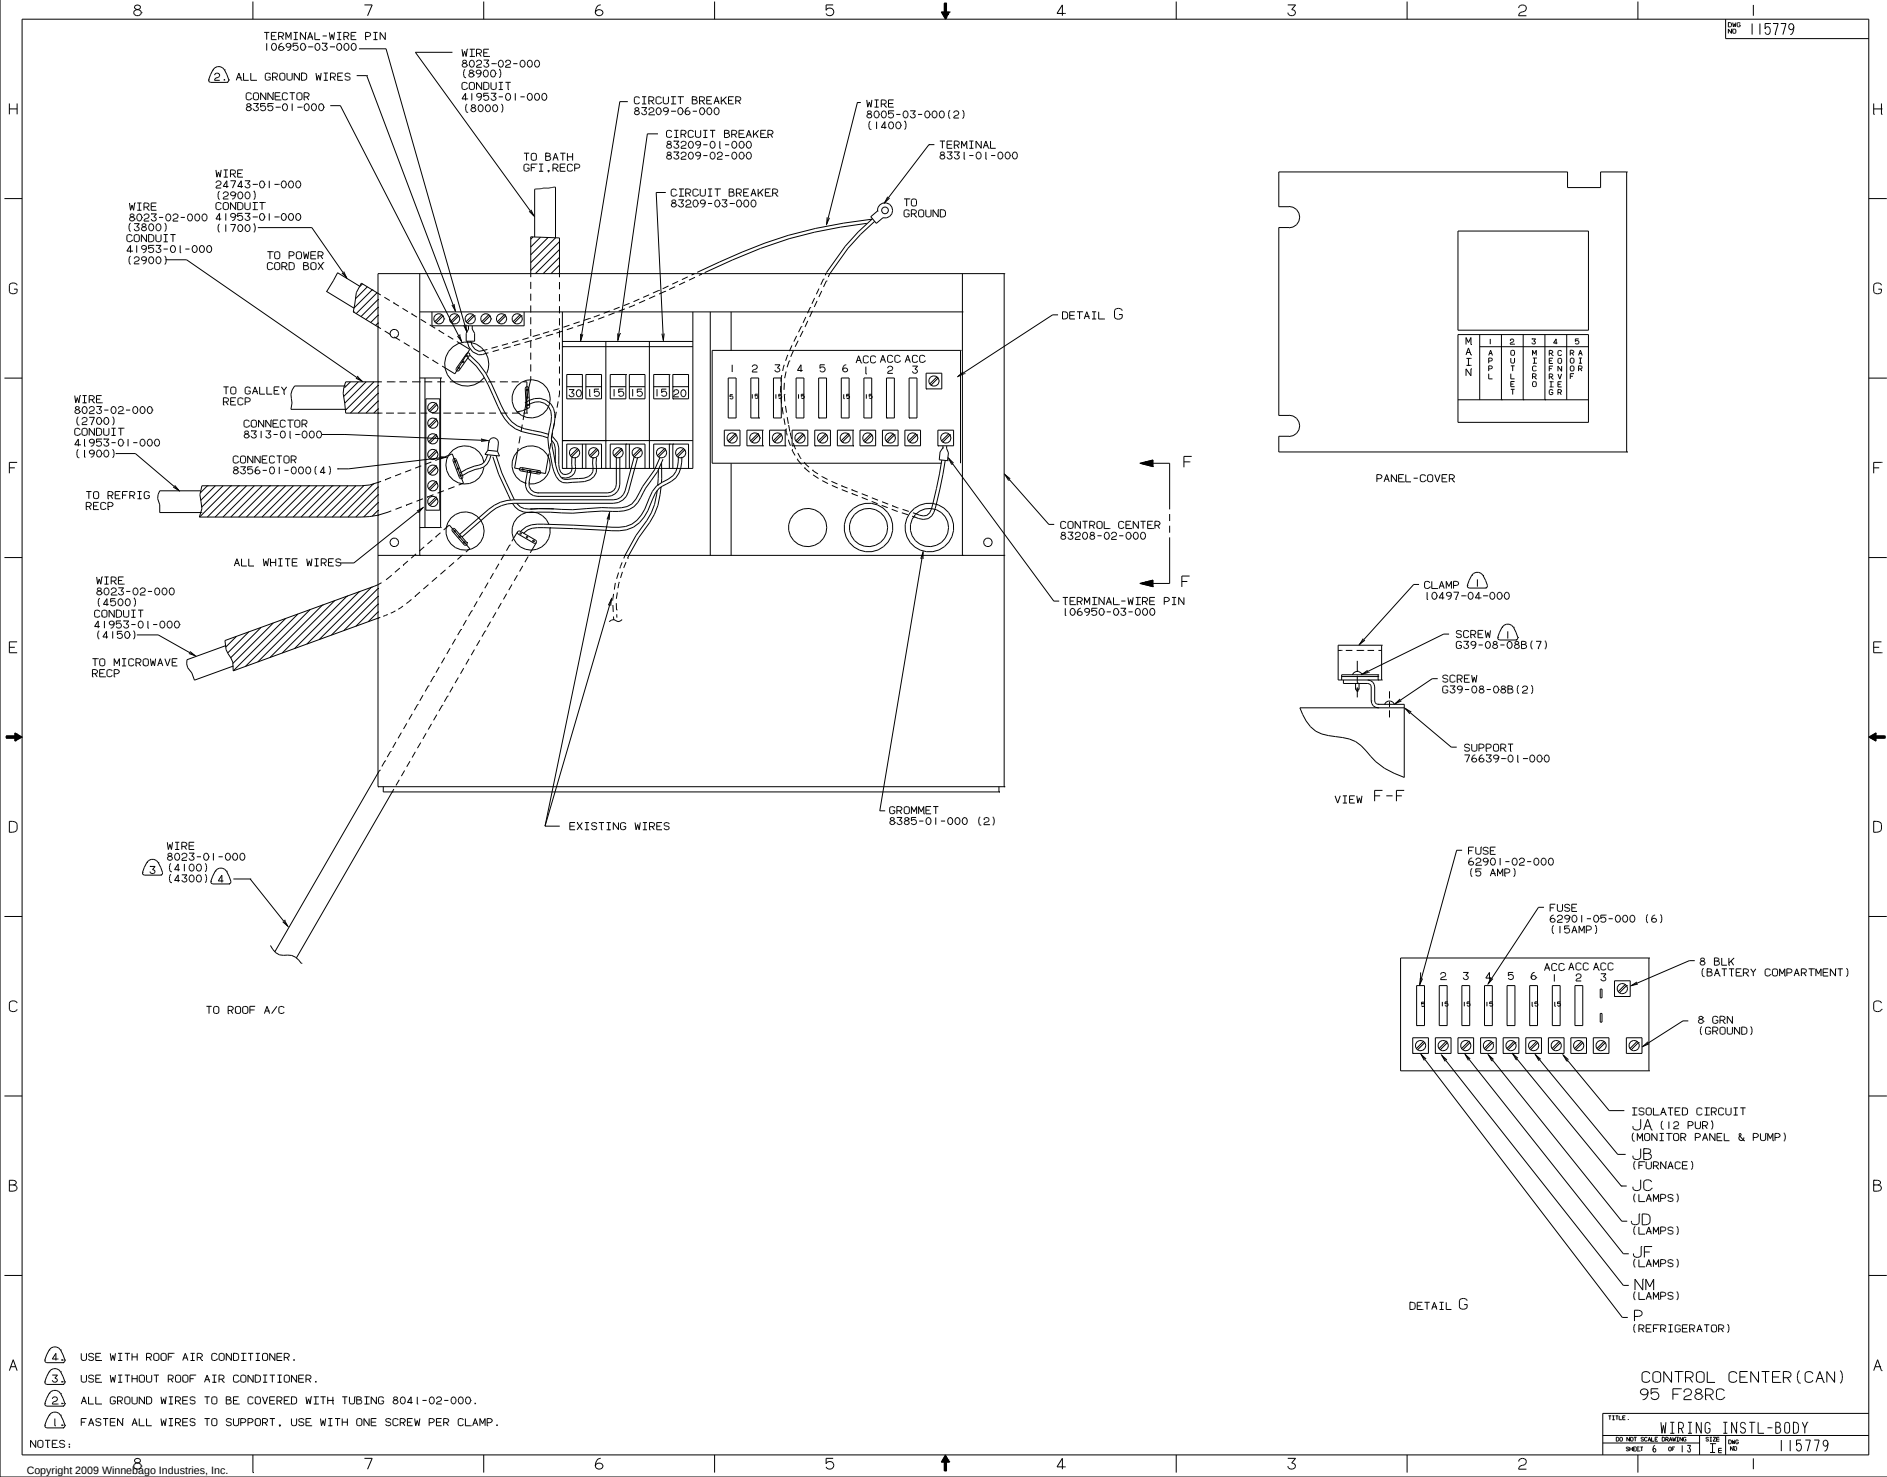


- 4 USE WITH ROOF AIR CONDITIONER.
- 3 USE WITHOUT ROOF AIR CONDITIONER.
- 2 ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
- 1 FASTEN ALL WIRES TO SUPPORT. USE WITH ONE SCREW PER CLAMP.


NOTES:

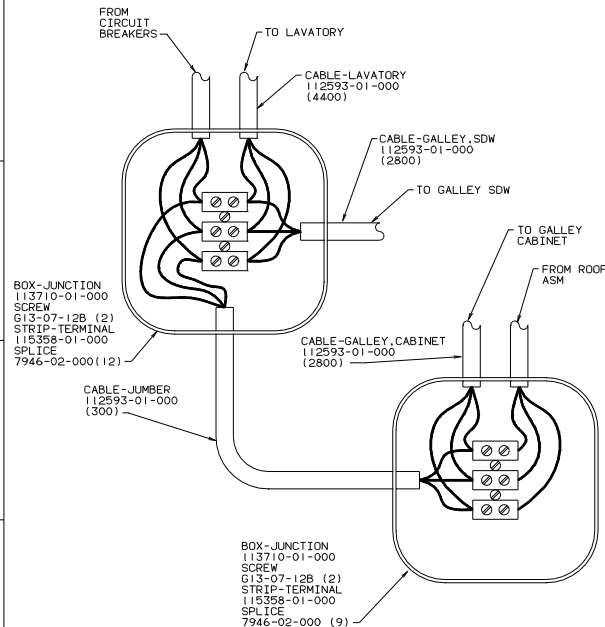


DETAIL L

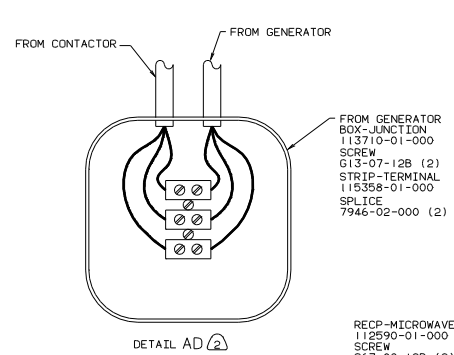


DETAIL AD

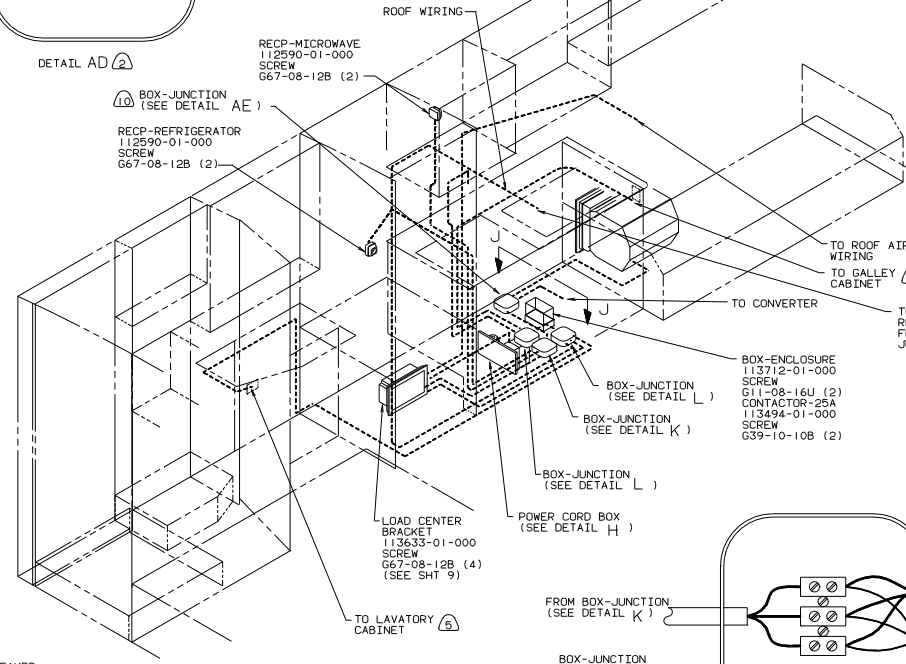


DETAIL AE

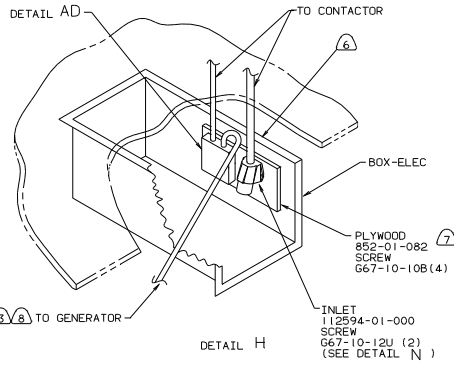


DETAIL H

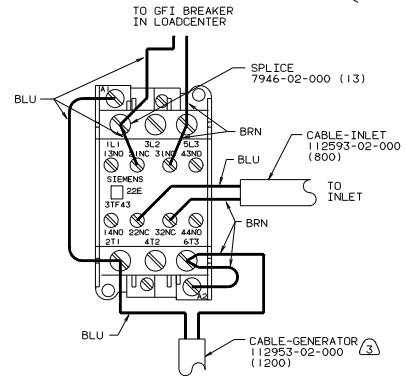

DETAIL J-U

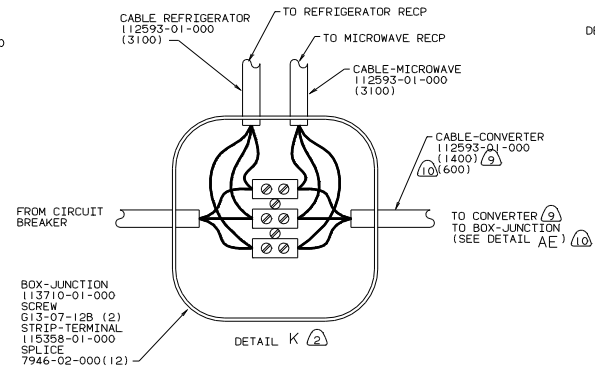


DETAIL K

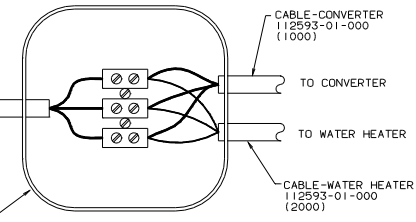

220V LEFT (EUROPEAN)
95 F28RC

- NOTES:
- WITH EUROPEAN EXPORT PACKAGE ONLY.
 - WITHOUT EUROPEAN EXPORT PACKAGE.
 - SEE GENERATOR INSTALLATION FOR ADDITIONAL INFORMATION.
 - PAINT EXPOSED SURFACES BLACK WITH 106112-01-000.
 - SEAL WITH BEDDING COMPOUND 69639-01-000.
 - WIRES TO BE WRAPPED WITH TAPE 8363-01-000 AND CLAMPED WITH CLAMP 10495-02-000 AND SCREW G67-08-10U.
 - GRN/YEL WIRES GO IN GROUND LUG.
 - USE WITH GENERATOR.
 - ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10495-01-000, 10495-02-000 OR CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

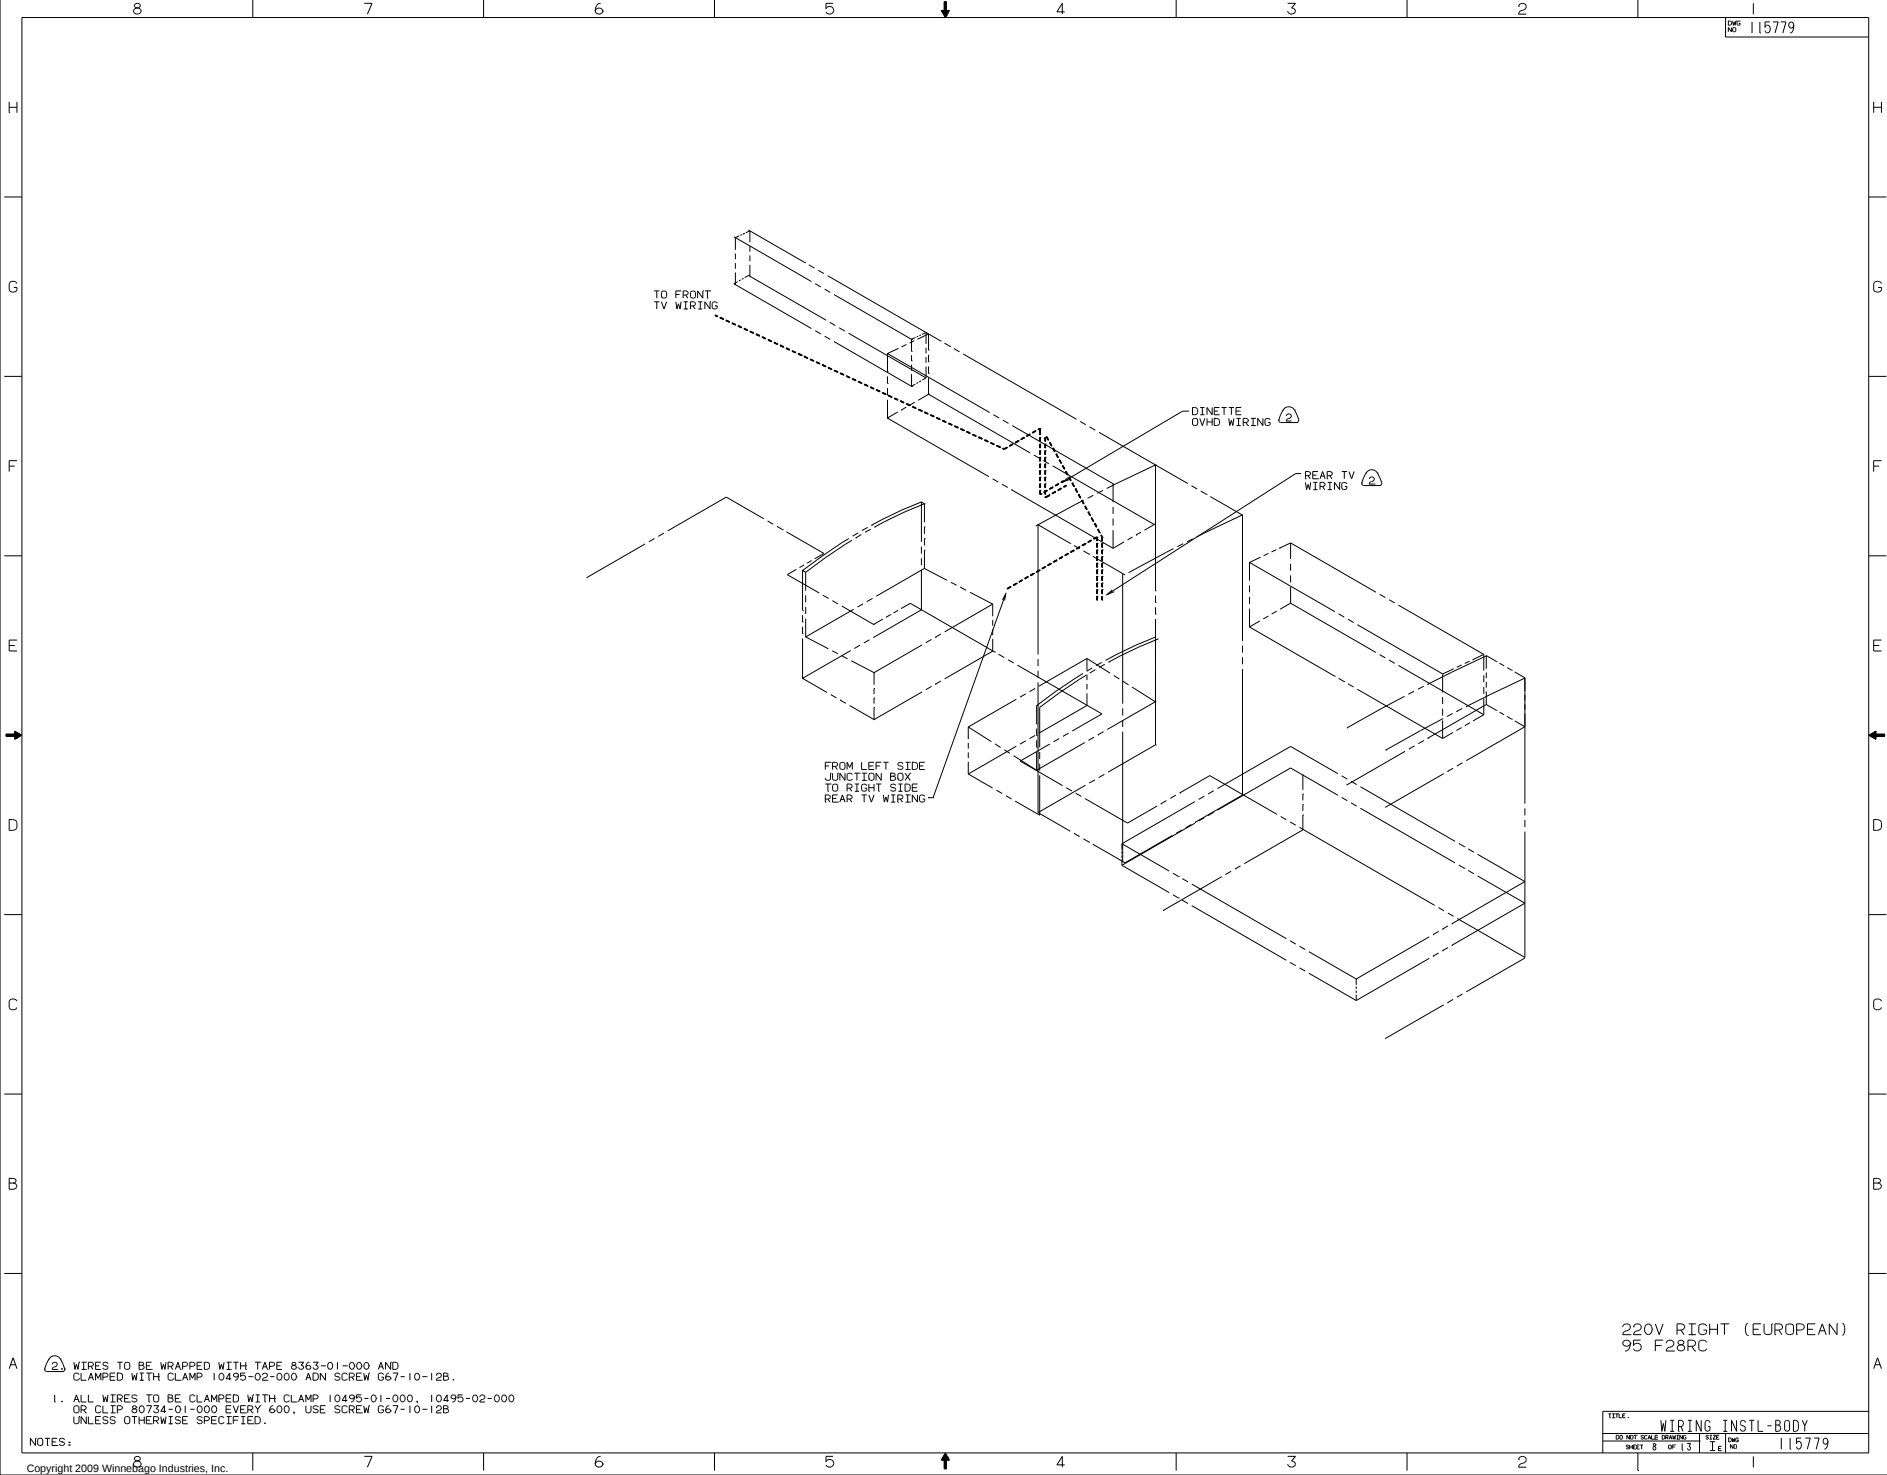


220V RIGHT (EUROPEAN)
95 F28RC

- ② WIRES TO BE WRAPPED WITH TAPE 8363-01-000 AND CLAMPED WITH CLAMP 10495-02-000 ANDN SCREW G67-10-12B.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000, 10495-02-000 OR CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:


TITLE: WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	ING	NO
SHEET 8 OF 13	1	1	1

115779

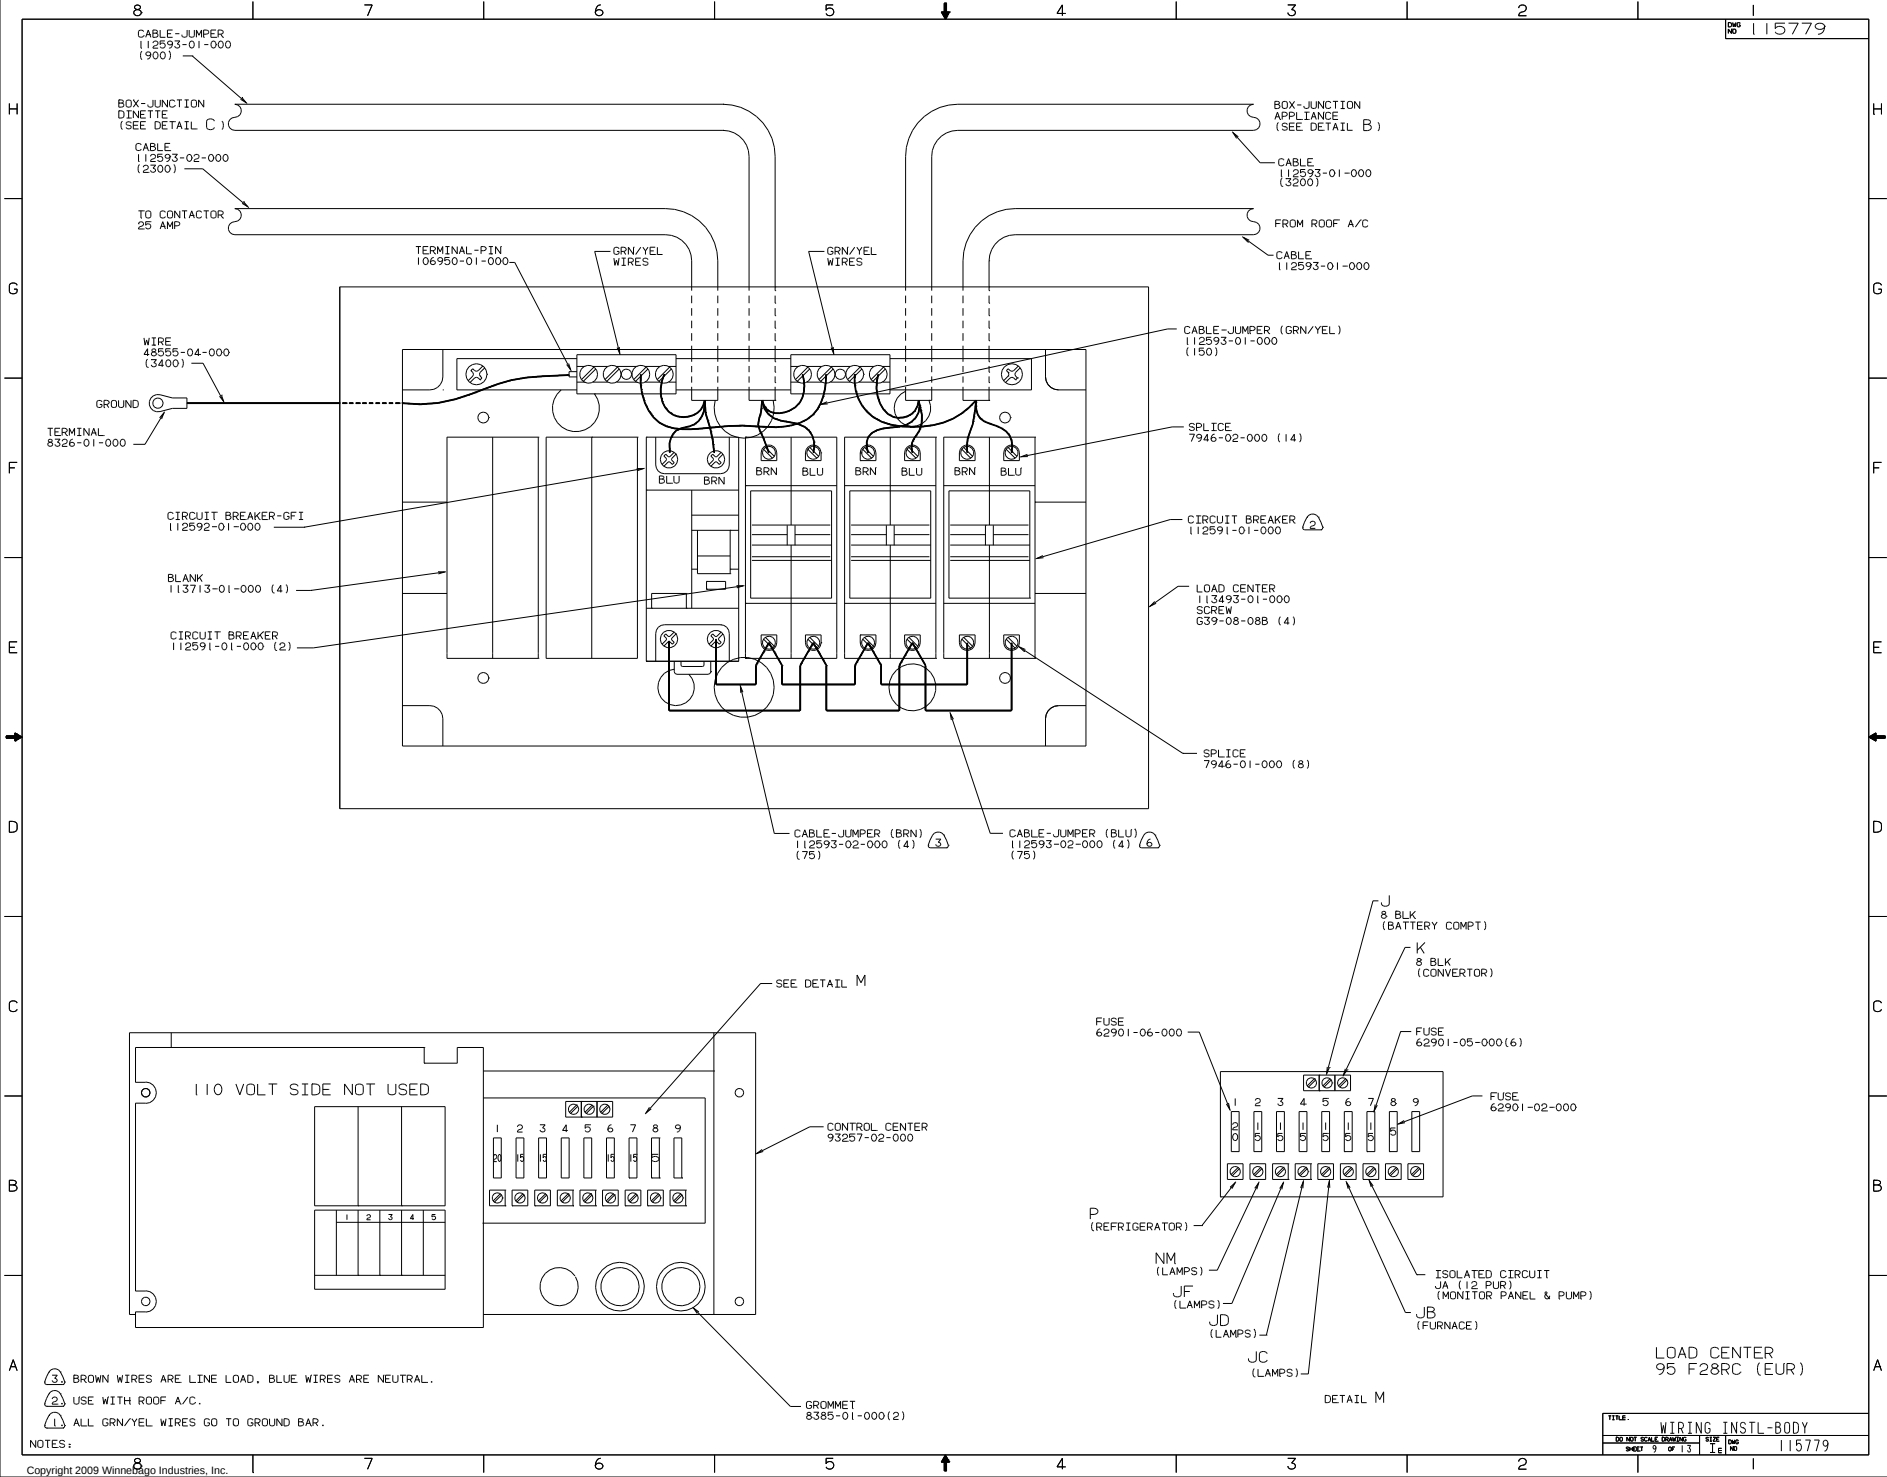






Copyright 2009 Winnebago Industries, Inc.

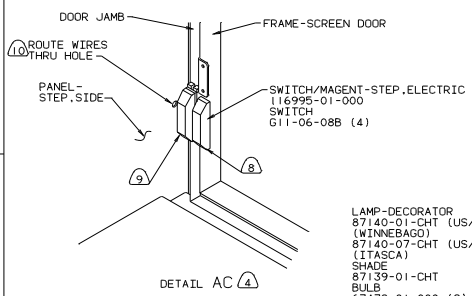

- LAMP-DECORATOR
87140-01-CHT (US/CAN)
(WINNEBAGO)
87140-07-CHT (US/CAN)
(ITASCA)
SHADE
87139-01-CHT
BULB
67479-01-000 (2)
SCREW
G67-10-24J (2)
CONNECTOR
58028-01-000 (2)

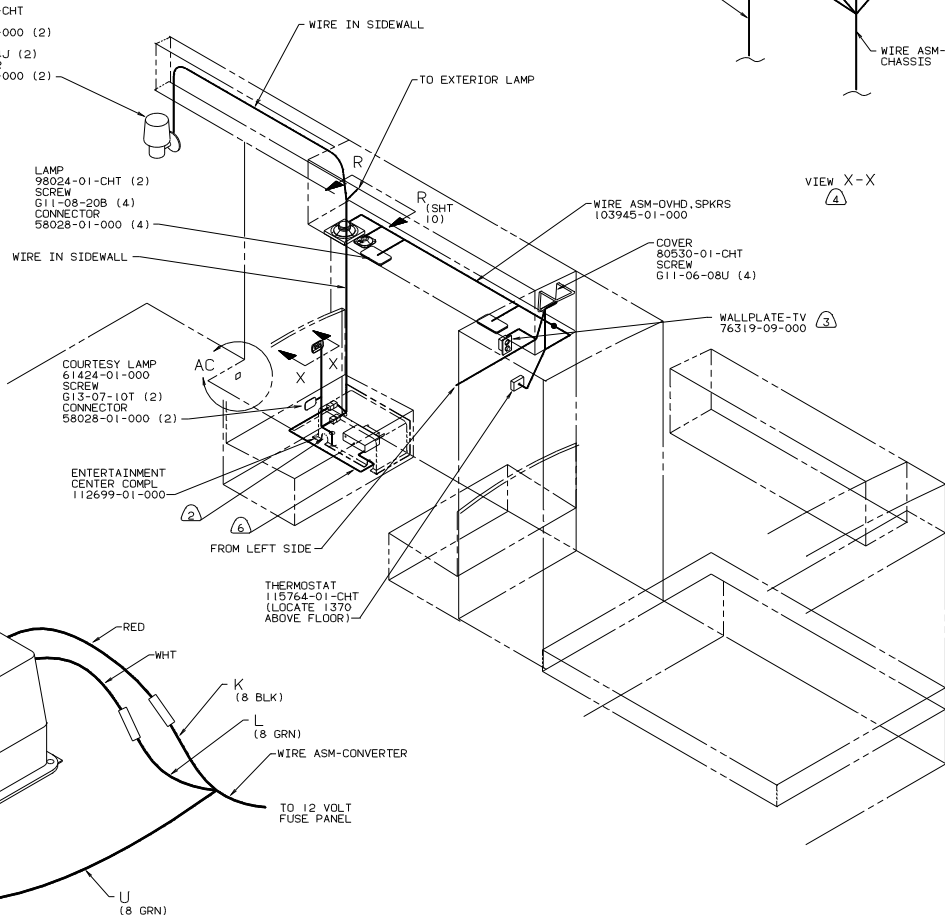

DETAIL W 7
(SEE SHT 10)

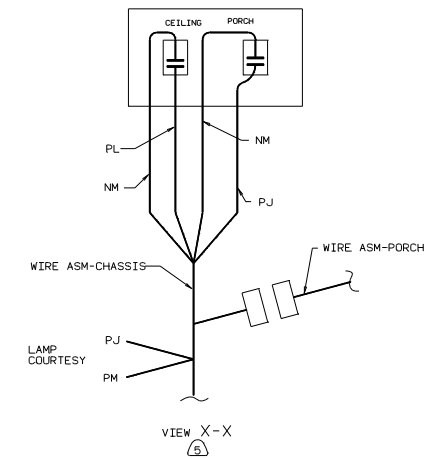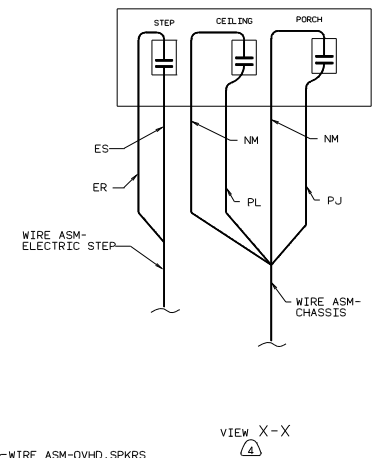

- 7 USE WITH EUROPEAN ELECTRICAL PREP.
- 6 COVER WITH MINIMUM DIAMETER CONDUIT 41953-01-.02-.06-000 IN THIS AREA.
- 5 WITHOUT ELECTRIC STEP.
- 4 WITH ELECTRIC STEP.
- 3 USE WITH TV ANTENNA.
- 2 SEAL HOLES THROUGH FLOOR.
1. CLAMP WIRE WITH CLAMP 83609-01-000 AND SCREW G11-08-12B EVERY 600

- 10 WITHOUT ELECTRIC STEP SEAL HOLE.
- 9 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB. ADJUST HEIGHT TO MATCH MAGNET.
- 8 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

12V RIGHT (US/CAN)
95 F28RC

TITLE: WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	ENG	NO
SHEET 11 OF 13	11	11	11
115779			

