



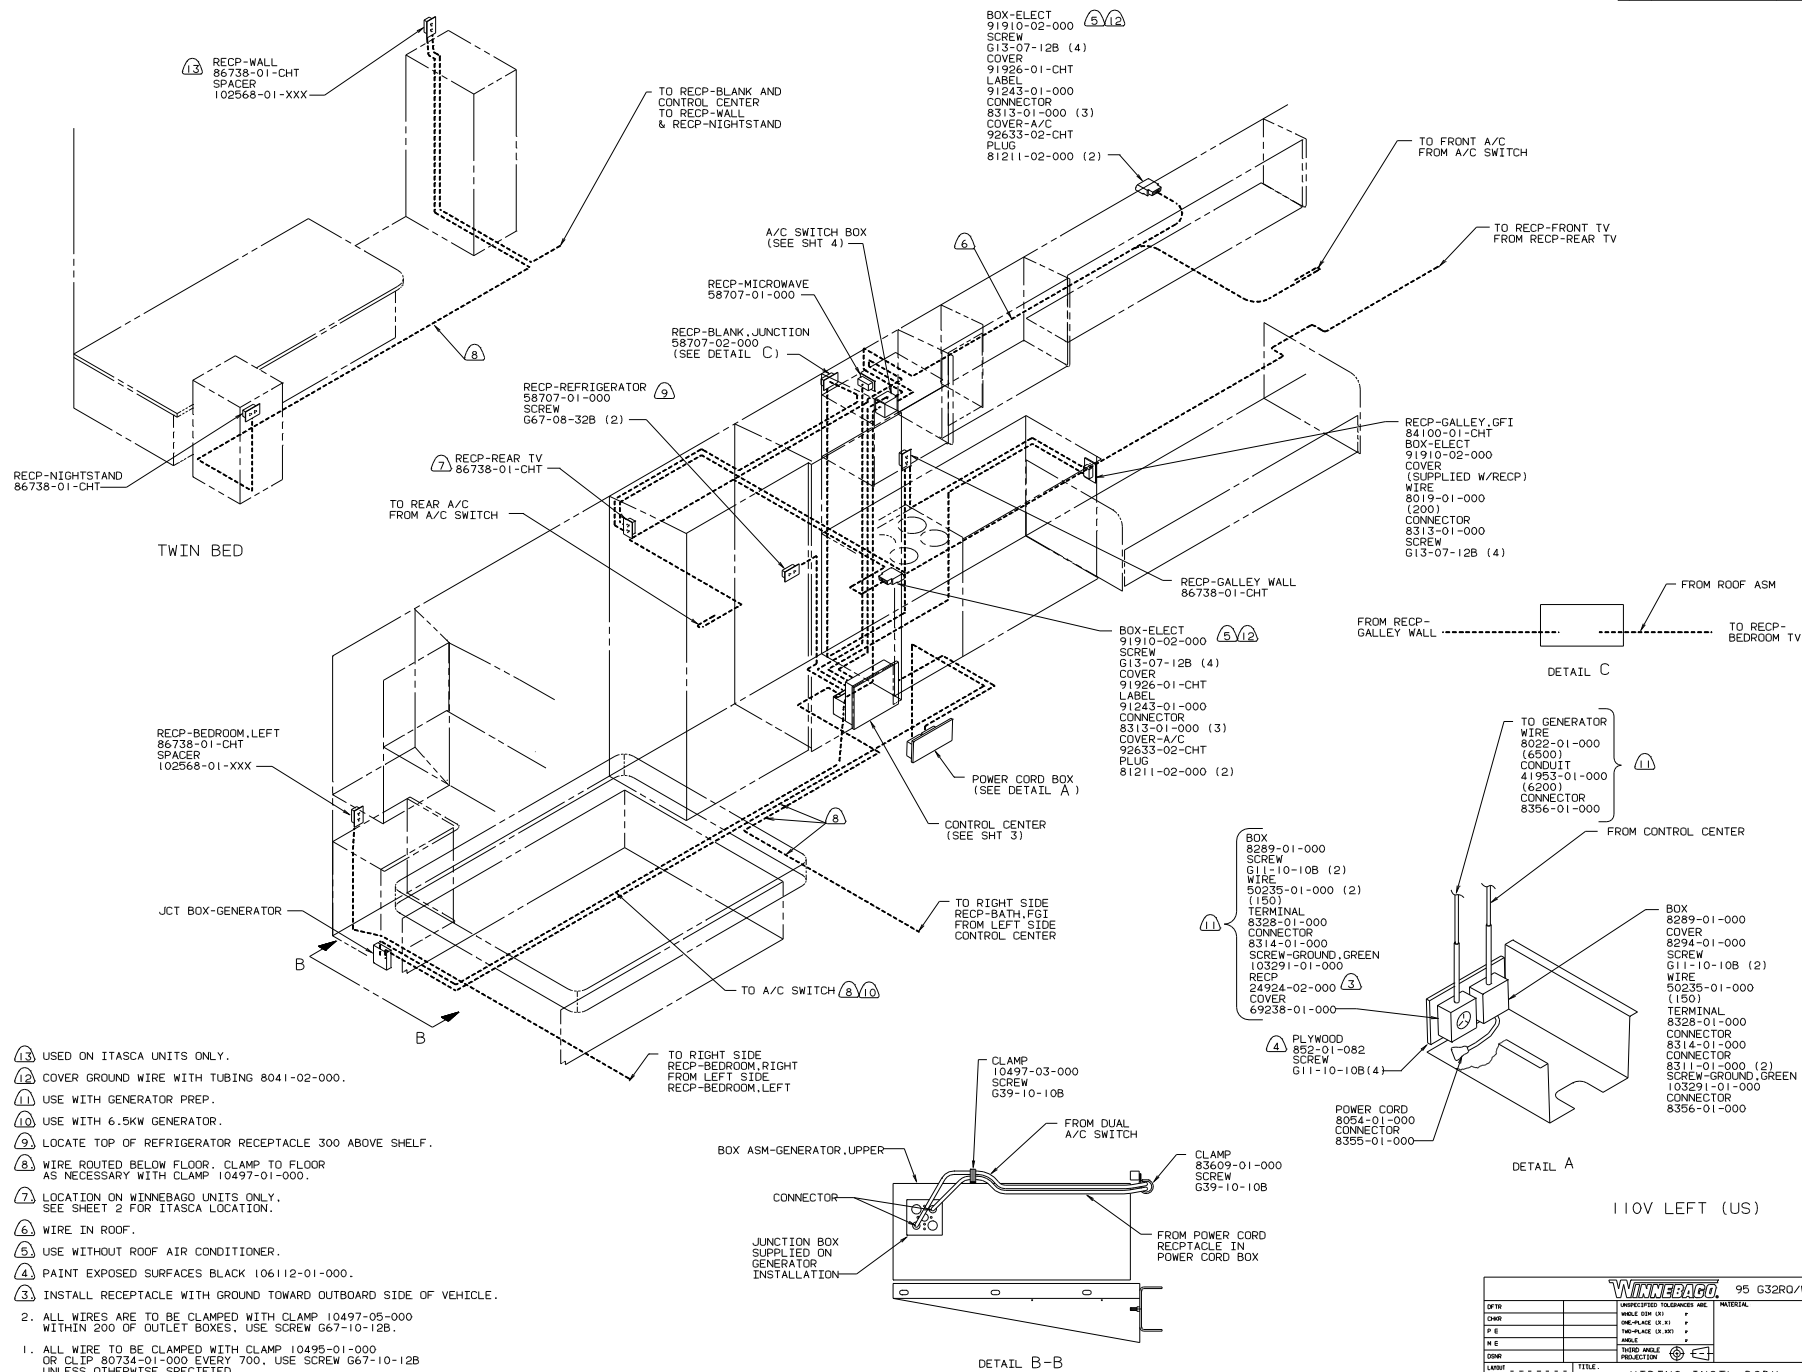

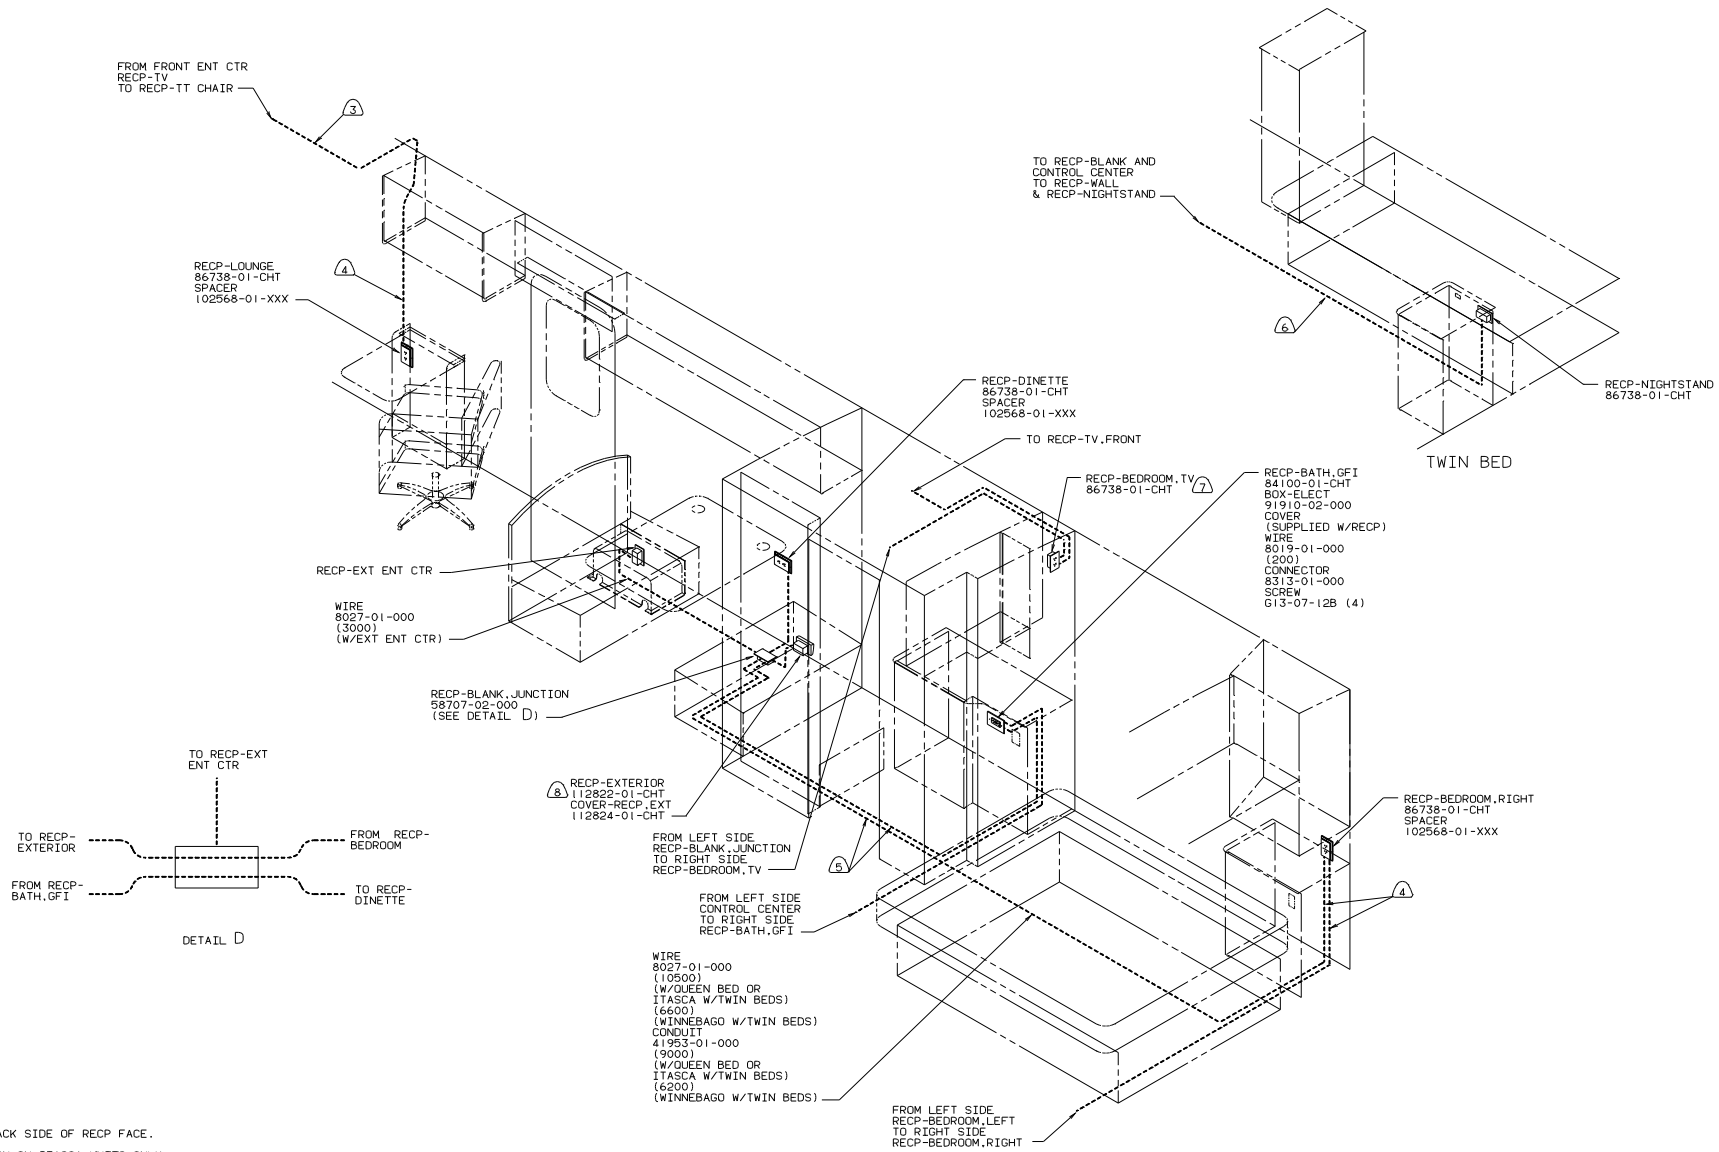

8) SEAL BACK SIDE OF REC-P FACE.

7) LOCATION ON ITASCA UNITS ONLY.
SEE SHEET 1 FOR WINNEBAGO LOCATION.

6) WIRE ROUTED BELOW FLOOR. CLAMP TO FLOOR
AS NECESSARY WITH CLAMP 10497-01-000.

5) WIRE IN FLOOR.

4) WIRE IN SIDEWALL.

3) WIRE IN ROOF.





2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000
WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.

1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000
OR CLIP 80734-01-000 EVERY 700. USE SCREW G67-10-12B
UNLESS OTHERWISE SPECIFIED.

NOTES:



110V RIGHT (US)
95 G32RQ/WQ

TITLE			
WIRING INSTL-BODY			
DO NOT SCALE DRAWING	DATE	106	NO
SHEET 2 OF 12	16		

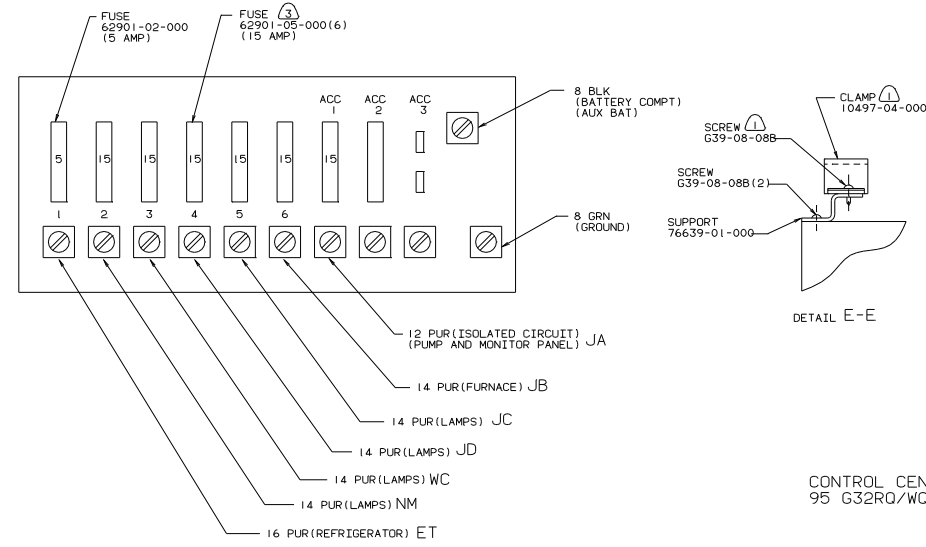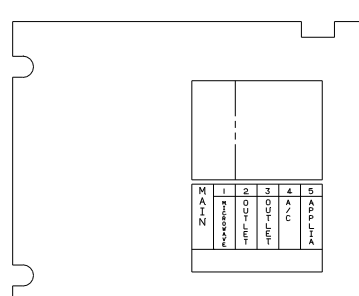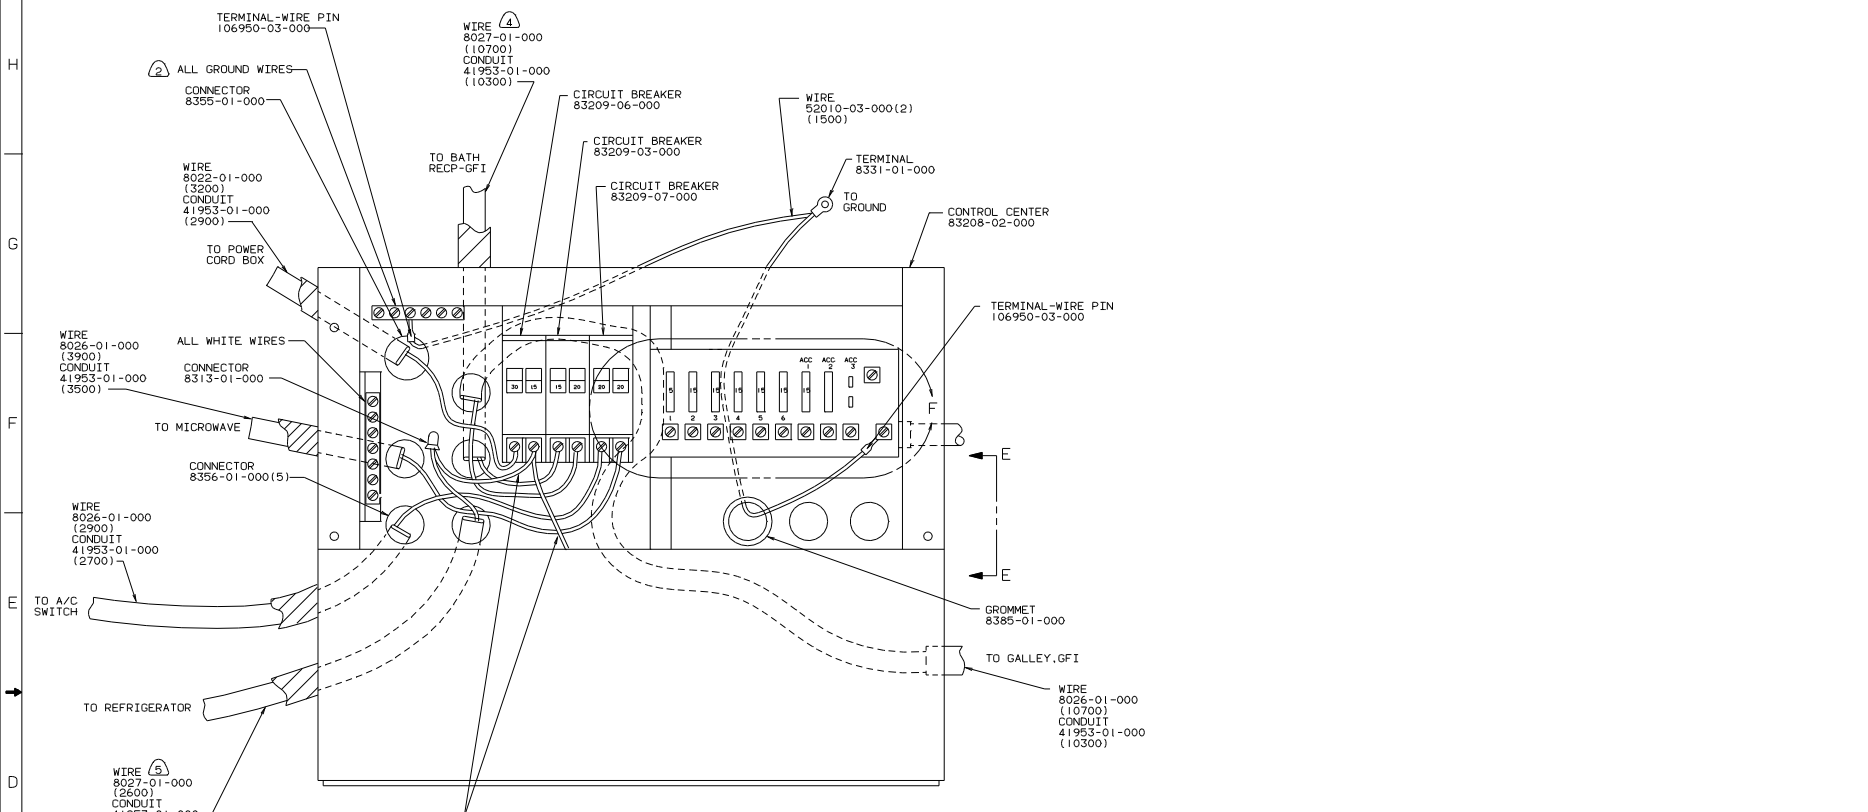


CONTROL CENTER (US)
95 G32RQ/WQ

- NOTES:
- MARK WIRE WITH COLOR TAPE AS SHOWN.
 - WITH QUEEN BED.
 - ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 - FASTEN ALL WIRES TO SUPPORT, USE ONE SCREW AND CLAMP PER WIRE.

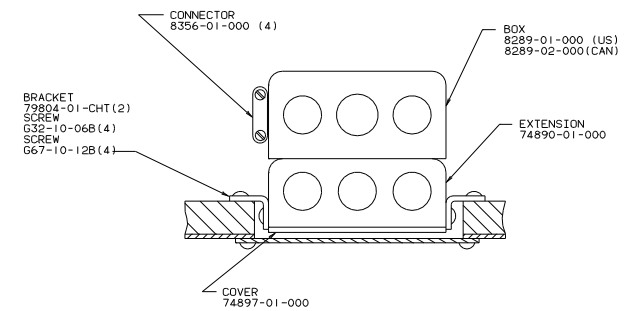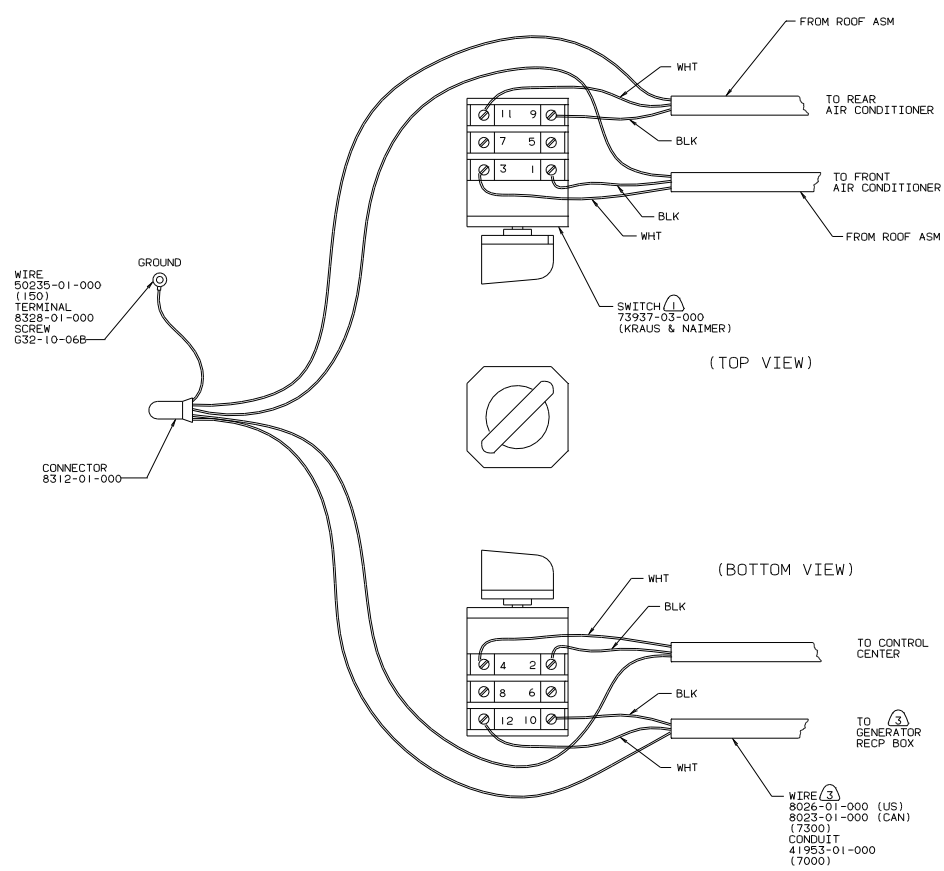


TOP VIEW OF BOX

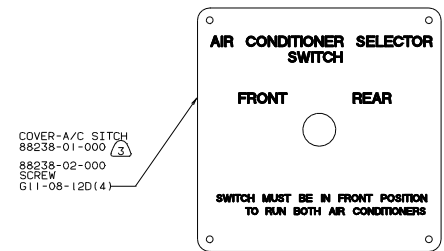

DUAL AIR SWITCH
110V (US/CAN)
95 G32RQ/WQ

- NOTES:
- USE WITH 6500 WATT GENERATOR OR LARGER.
 - ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 - FASTEN SWITCH TO COVER 74897-01-000 BEFORE FASTENING COVER TO BOX.




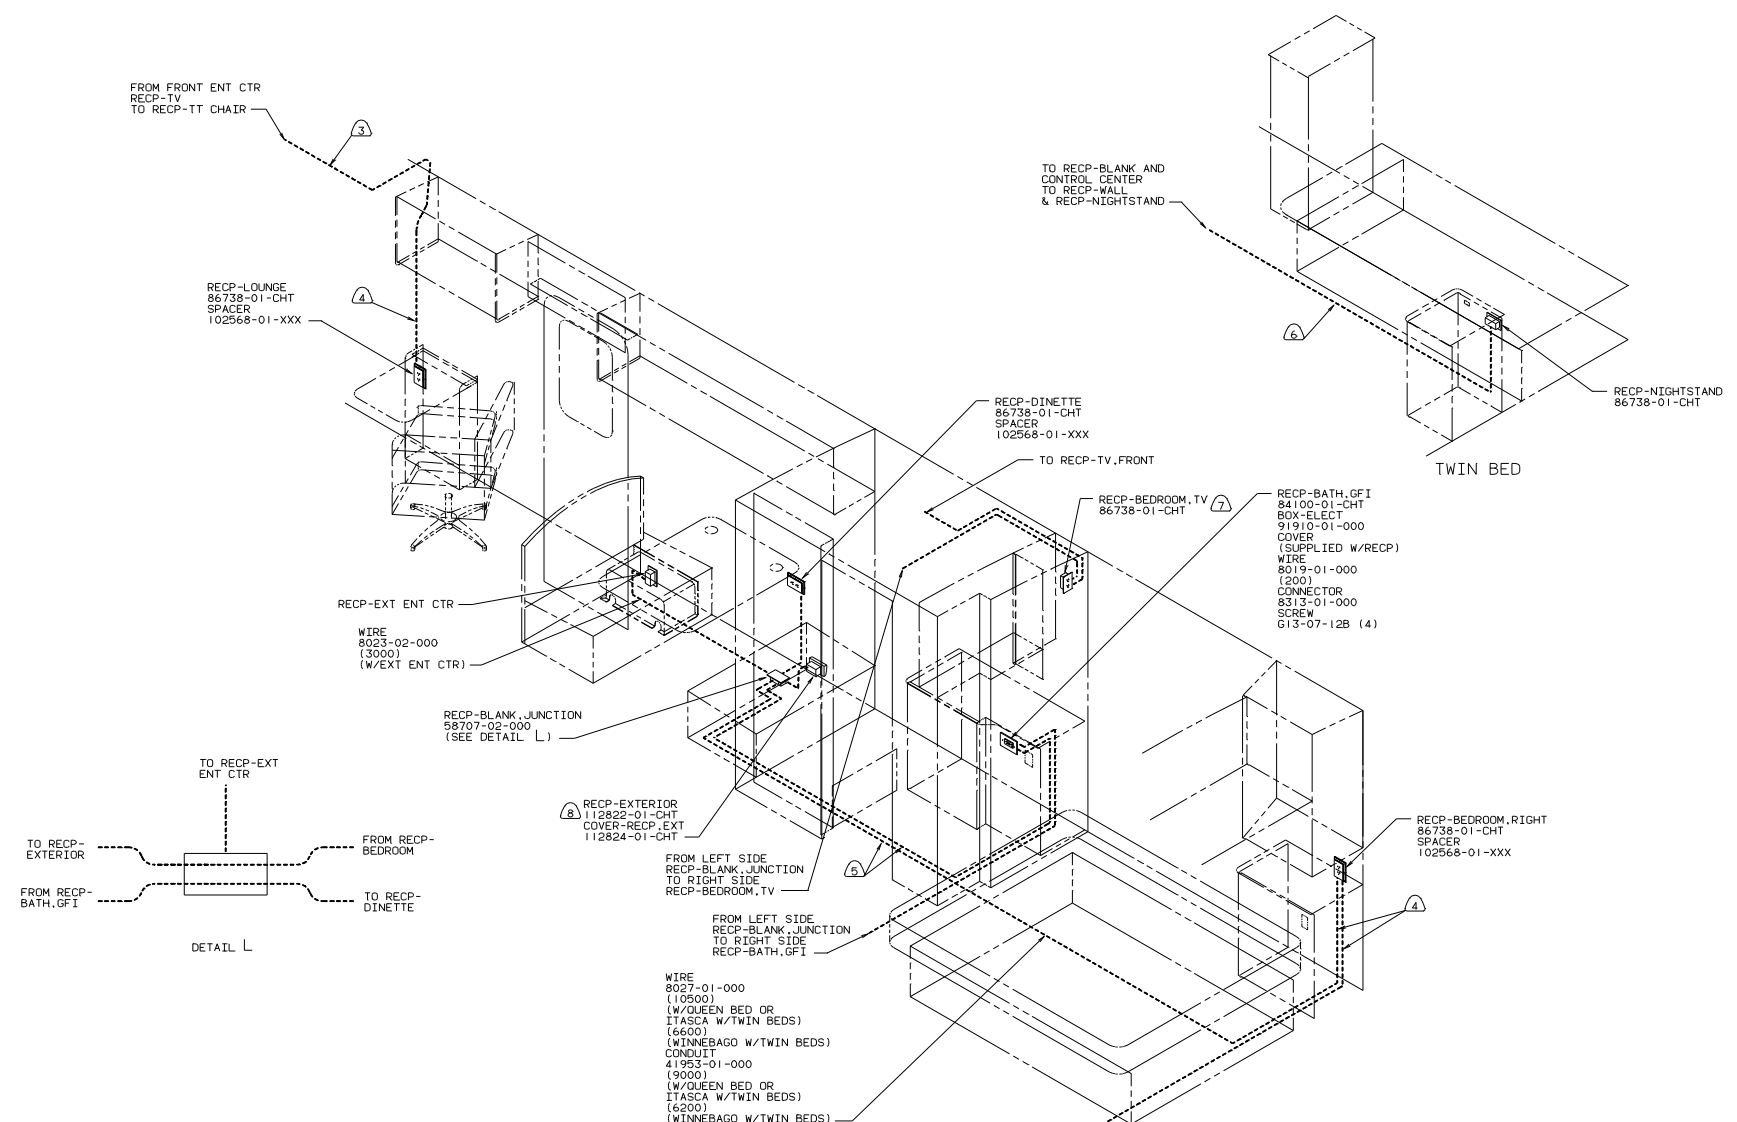


- ⑧ SEAL BACK SIDE OF RECP FACE.
- ⑦ LOCATION FOR RECP-BEDROOM TV ON ITASCA UNITS ONLY.
SEE SHEET 5 FOR WINNEBAGO LOCATION.
- ⑥ WIRE ROUTED BELOW FLOOR. CLAMP TO FLOOR
AS NECESSARY WITH CLAMP 10497-01-000.
- ⑤ WIRE IN FLOOR.
- ④ WIRE IN SIDEWALL.
- ③ WIRE IN ROOF.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000
WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000
OR CLIP 80734-01-000 EVERY 700. USE SCREW G67-10-12B
UNLESS OTHERWISE SPECIFIED.


110V RIGHT (CAN)
95 G32RQ/WQ

NOTES:


TITLE			
WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	DATE	NO
SHEET 6 OF 12	1E		

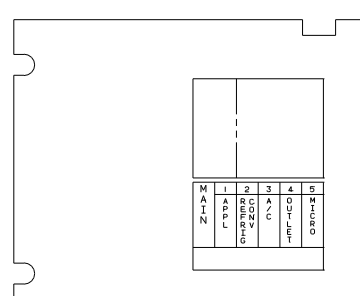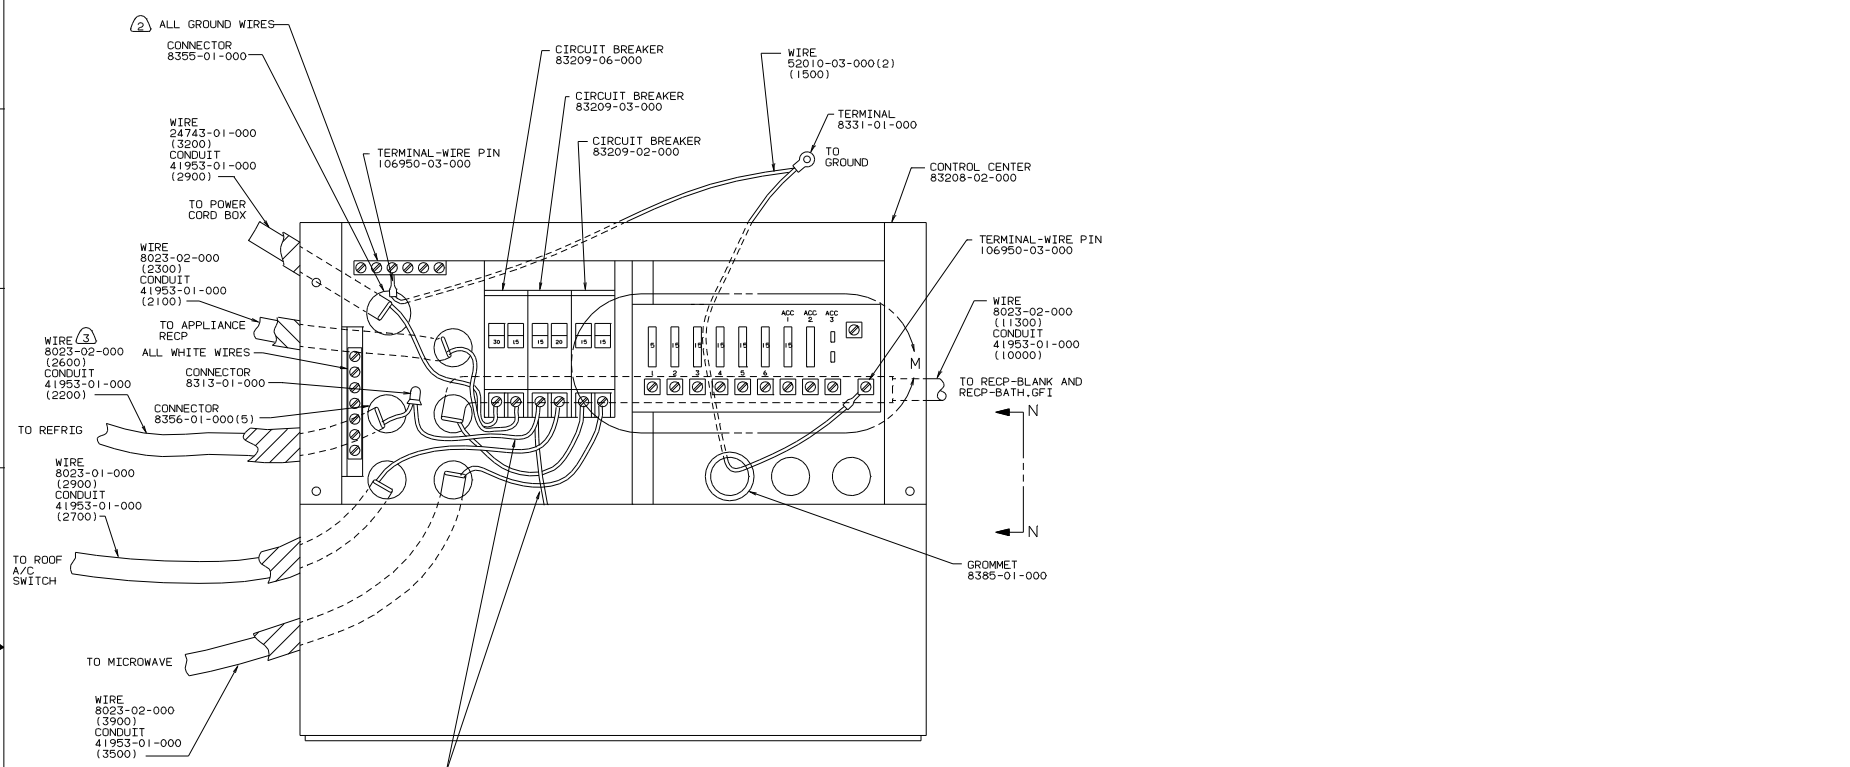

PANEL-COVER

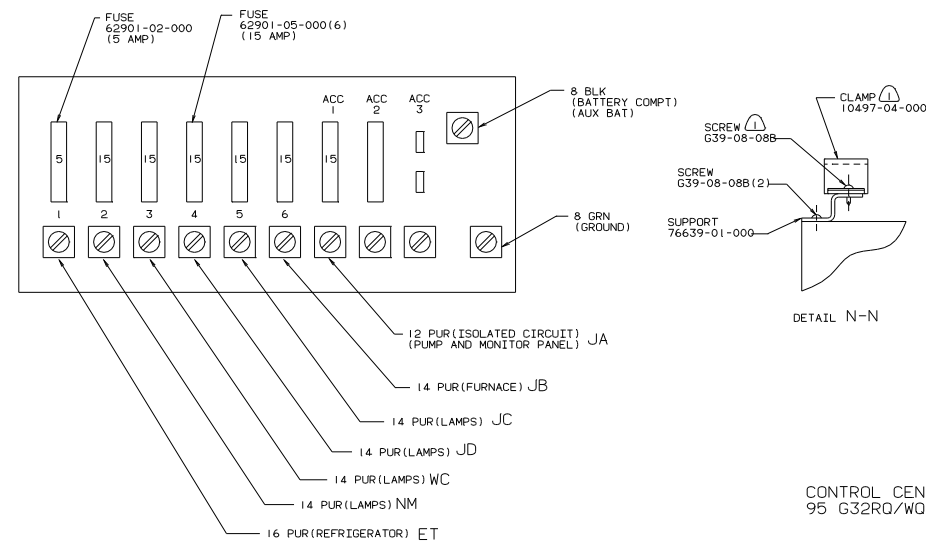

DETAIL M

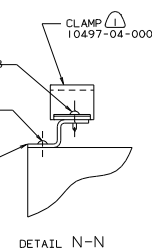


DETAIL N-N



CONTROL CENTER (CAN)
95 G32RQ/WQ

- NOTES:
- MARK WITH COLOR TAPE AS SHOWN.
 - ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 - FASTEN ALL WIRES TO SUPPORT. USE ONE SCREW AND CLAMP PER WIRE.



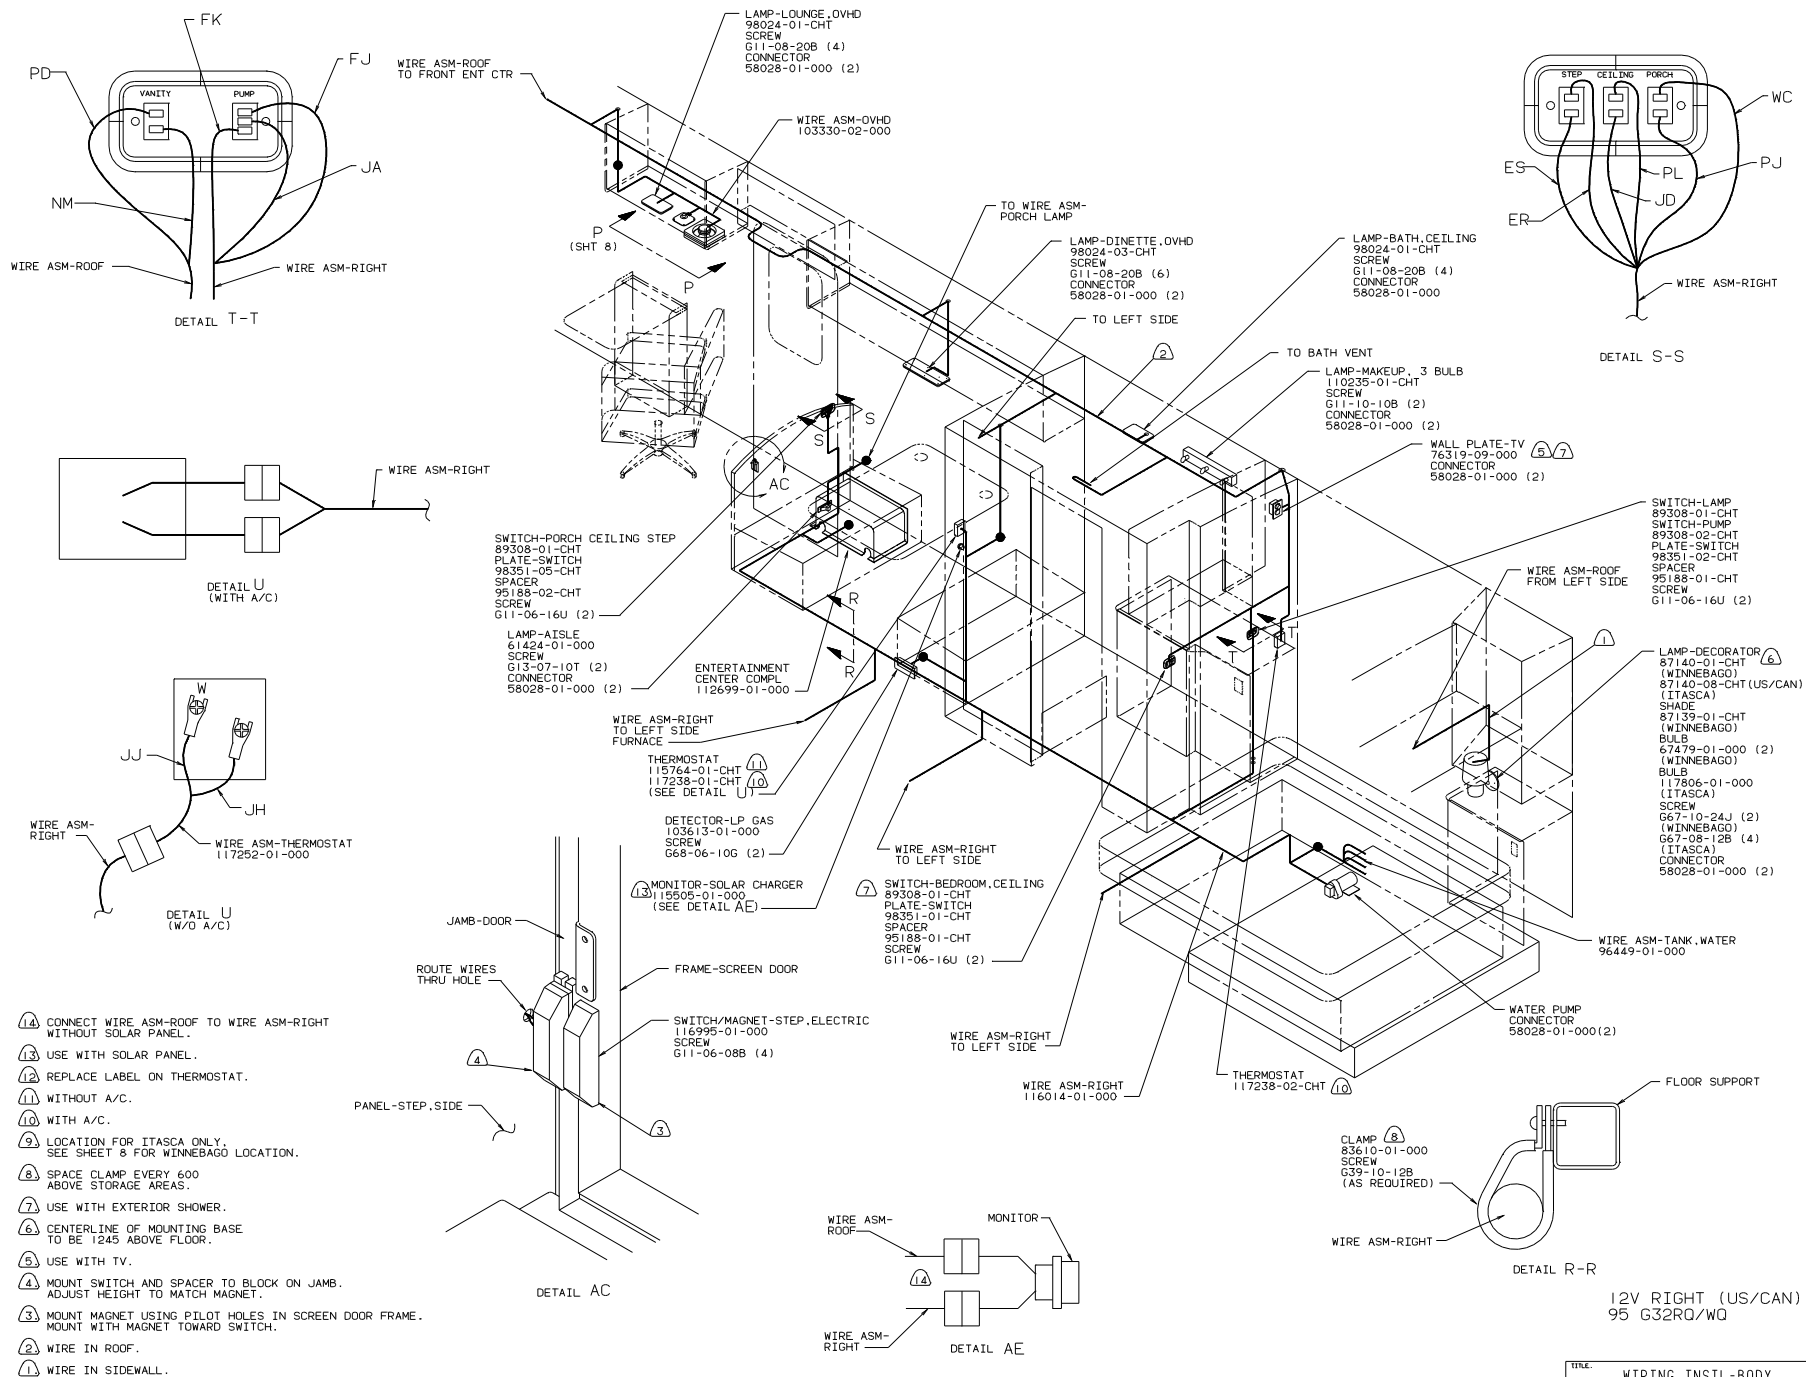

- NOTES:
1. CONNECT WIRE ASM-ROOF TO WIRE ASM-RIGHT WITHOUT SOLAR PANEL.
 2. USE WITH SOLAR PANEL.
 3. REPLACE LABEL ON THERMOSTAT.
 4. WITHOUT A/C.
 5. WITH A/C.
 6. LOCATION FOR ITASCA ONLY, SEE SHEET 8 FOR WINNEBAGO LOCATION.
 7. SPACE CLAMP EVERY 600 ABOVE STORAGE AREAS.
 8. USE WITH EXTERIOR SHOWER.
 9. CENTERLINE OF MOUNTING BASE TO BE 1245 ABOVE FLOOR.
 10. USE WITH TV.
 11. MOUNT SWITCH AND SPACER TO BLOCK ON JAMB. ADJUST HEIGHT TO MATCH MAGNET.
 12. MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.
 13. WIRE IN ROOF.
 14. WIRE IN SIDEWALL.

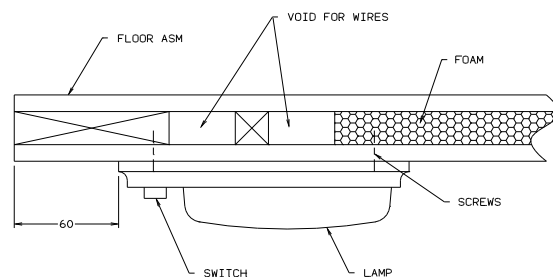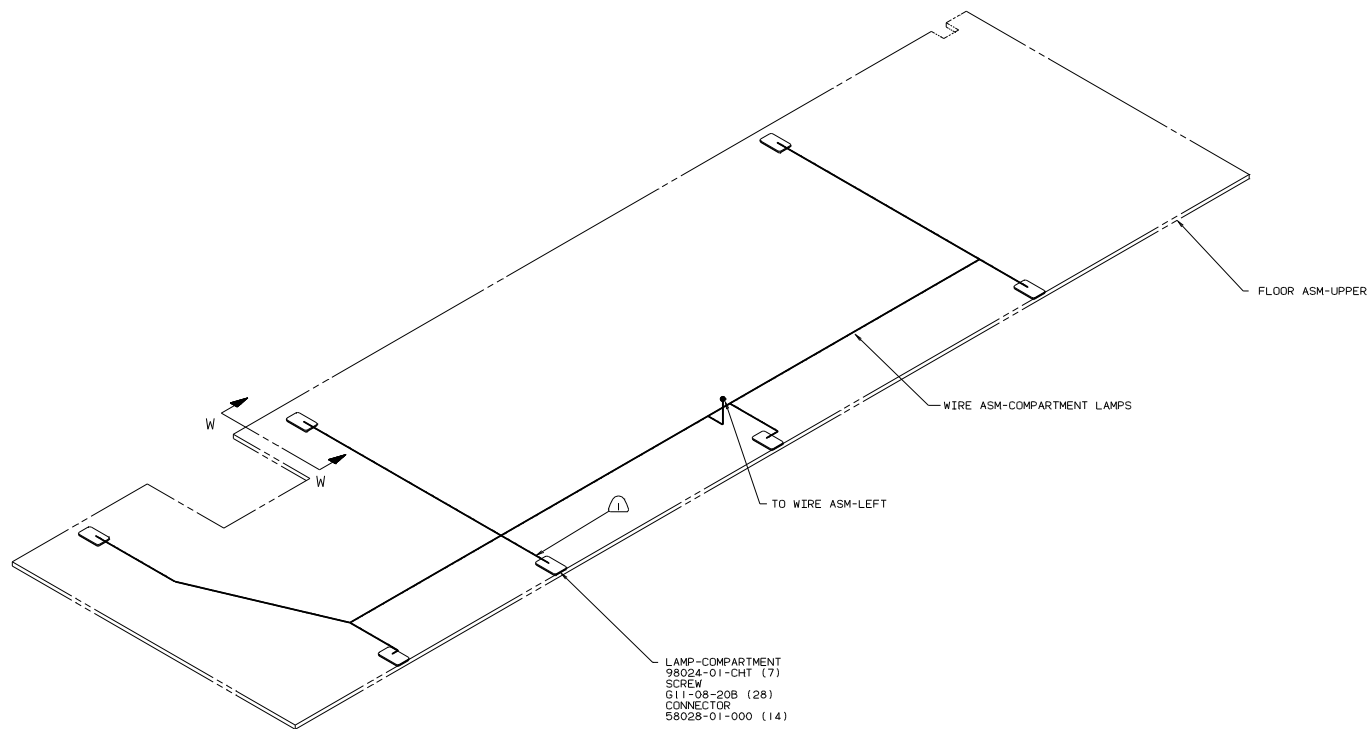

DETAIL W-W



2. LAMPS TO BE MOUNTED WITH SWITCH OUTBOARD
AND 75 +/-15 FROM EDGE OF FLOOR, UNLESS OTHERWISE SPECIFIED.

⚠ WIRE ASM ROUTED IN FLOOR.


NOTES:

COMPARTMENT LAMPS
95 G32RQ/WQ


TITLE			
WIRING INSTL-BODY			
DO NOT SCALE DRAWING	SIZE	DATE	115880
SHEET 10 OF 12	1E		

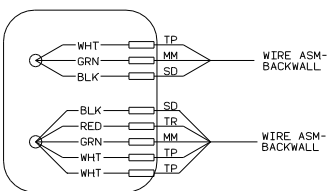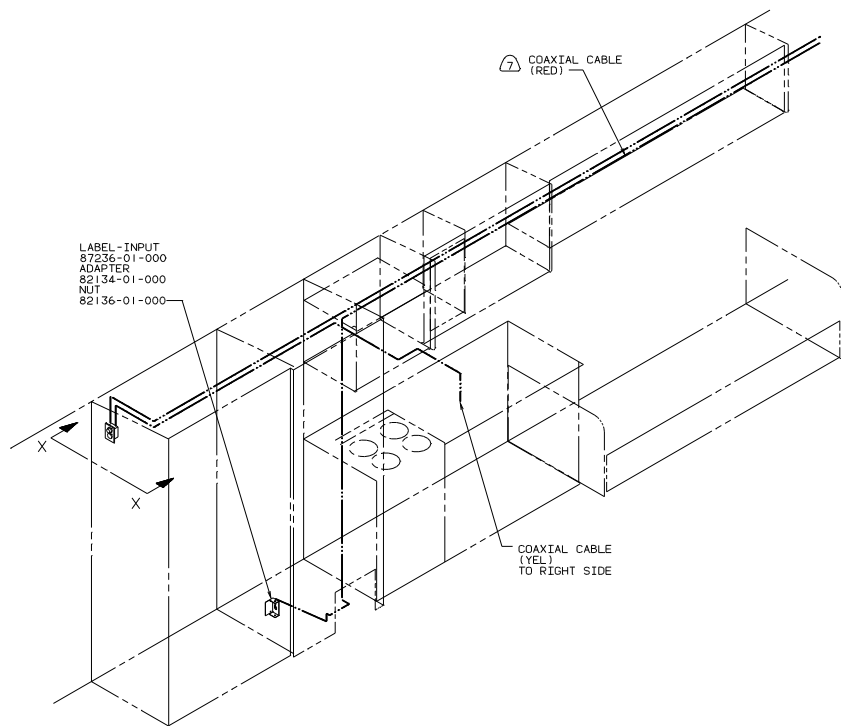


DETAIL V
(REAR VIEW OF
LEFT TAILLAMP
POD SHOWING WIRING)

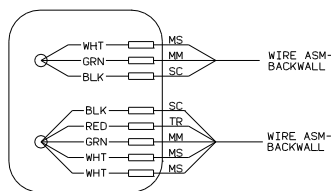

DETAIL AD
(REAR VIEW OF
RIGHT TAILLAMP
POD SHOWING WIRING)




W/O PATIO
ENTERTAINMENT CENTER

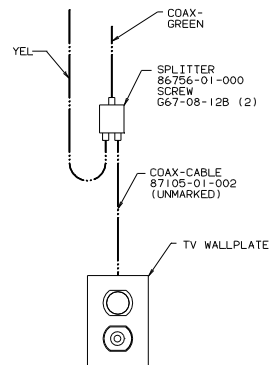

WITH PATIO
ENTERTAINMENT CENTER

DETAIL X-X

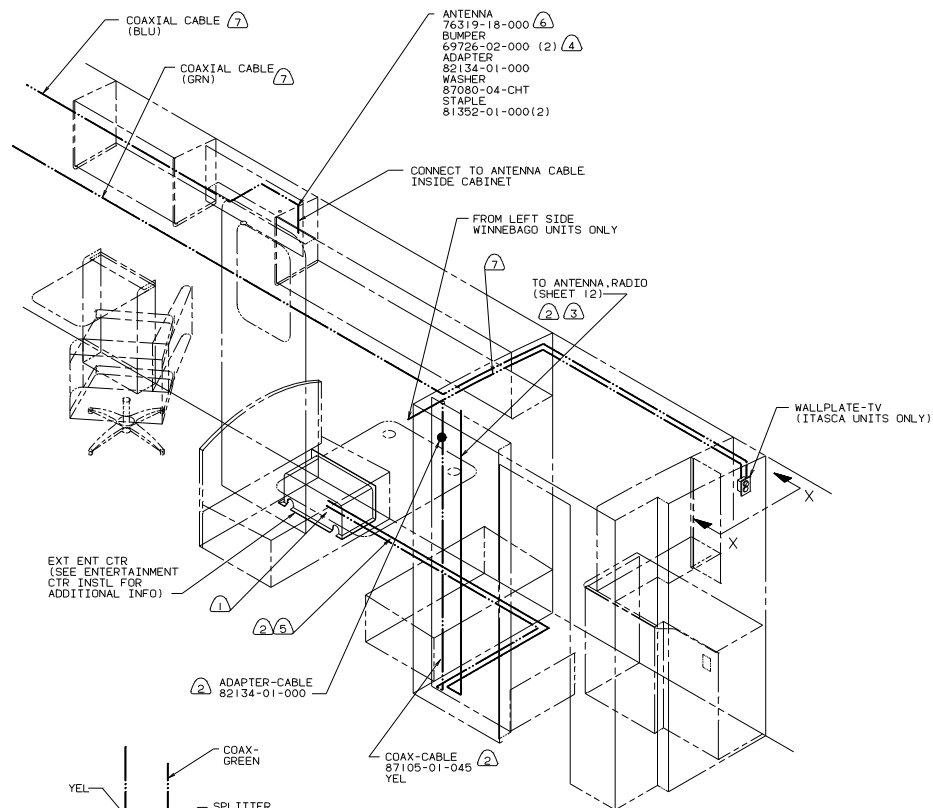

- NOTES:
- ⑦ WIRE IN ROOF.
 - ⑥ SEE DRAWING 76319-01-000 FOR INSTALLATION OF TV ANTENNA.
 - ⑤ WIRE ROUTED THRU FLOOR.
 - ④ ADD RUBBER BUMPER TO ANTENNA UNDER EACH END OF ANTENNA WHEN IN DOWN POSITION WHICH MAY COME IN CONTACT WITH ROOF.
 - ③ FROM RADIO ANTENNA.
 - ② USE WITH ENTERTAINMENT CENTER.
 - ① TO ENTERTAINMENT CENTER.

COAXIAL CABLE
95 G32RQ/WQ

