




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

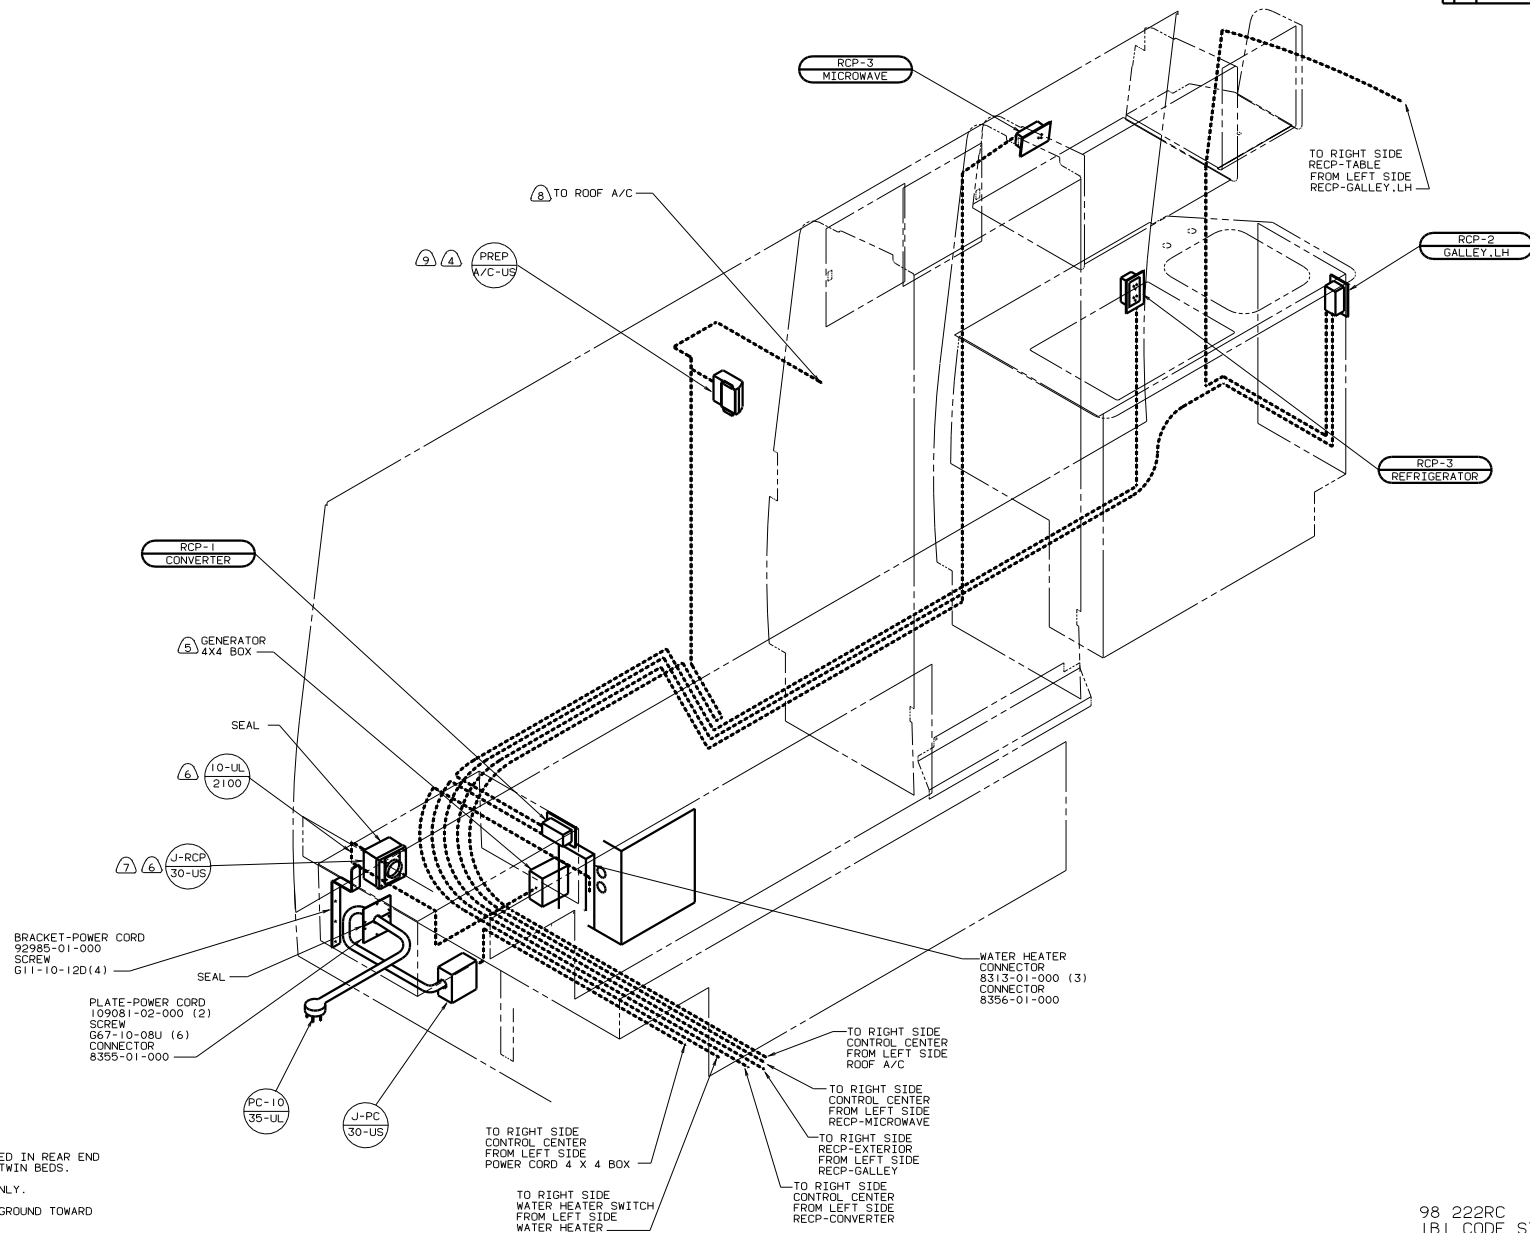

98 222RC
IBI CODE STANDARD-USA

2. PRE-WIRE BOX LOCATED IN REAR END OF OHWD CABT WITH TWIN BEDS.
3. WITH FACTORY A/C ONLY.
4. INSTALL RECP WITH GROUND TOWARD BOTTOM OF VEHICLE.
5. 14M GEN-3.0KW. GENERAC. GAS.
6. SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
7. NOT USED WITH 29K A/C. ROOF-ONE 7.100.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW 667-10-12B.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR IF 8076-01-000 EVER 600, USE SCREW 667-10-12B UNLESS OTHERWISE SPECIFIED.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-00
---	--

		98 222RC	
QFTO	DATE	UNREPEATED TOLERANCES AND	MATERIAL
CHWR	DATE	WHAILE DIM 1/16	
P E	DATE	ONE-PLACE 1/16, 3/16	
M E	DATE	TWO-PLACE 1/16, 3/16	
CHWR	DATE	WHAILE	
CHWR	DATE	THIRD HAILE	
CHWR	DATE	PRODUCTION	
TITLE WIRING INSTL-BODY(110130US)			
QIA #	SCALE, WORK	NO OF SETS OF DRAWING	SER. NO.
ALL DIMENSIONS ARE IN MILLIMETERS		SHEET	ING
			126969

FROM LEFT SIDE
RECP-GALLEY, LH
TO RIGHT SIDE
RECP-TABLE

RCP-2
TABLE

GFI-US
NIGHTSTAND

SWITCH-WATER HEATER
84420-01-000
LABEL
83588-01-000

RCP-E
EXTERIOR

LOAD CENTER
(SEE SHT 4)

FROM LEFT SIDE
A/C, ROOF
TO RIGHT SIDE
CONTROL CENTER

FROM LEFT SIDE
RECP-MICROWAVE
TO RIGHT SIDE
CONTROL CENTER

FROM LEFT SIDE
RECP-GALLEY, LH
TO RIGHT SIDE
RECP-EXTERIOR

FROM LEFT SIDE
POWER CORD 4X4 BOX
TO RIGHT SIDE
CONTROL CENTER

FROM LEFT SIDE
WATER HEATER
TO RIGHT SIDE
WATER HEATER SWITCH

FROM LEFT SIDE
RECP-CONVERTER
TO RIGHT SIDE
CONTROL CENTER

5 SEAL BACK SIDE OF RECP FACE.

4 WIRE ROUTED THRU SIDEWALL.

3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000
WITHIN 200 OF OUTLET BOXES, USE SCREW G67-10-12B.

1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR
CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B
UNLESS OTHERWISE SPECIFIED.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

97 222RC
1B1 CODE STANDARDS-USA
44V BED-DOUBLE, SIDEWALL

TITLE
WIRING INSTL-BODY(110R30US)
SHEET 2 OF 14
126969

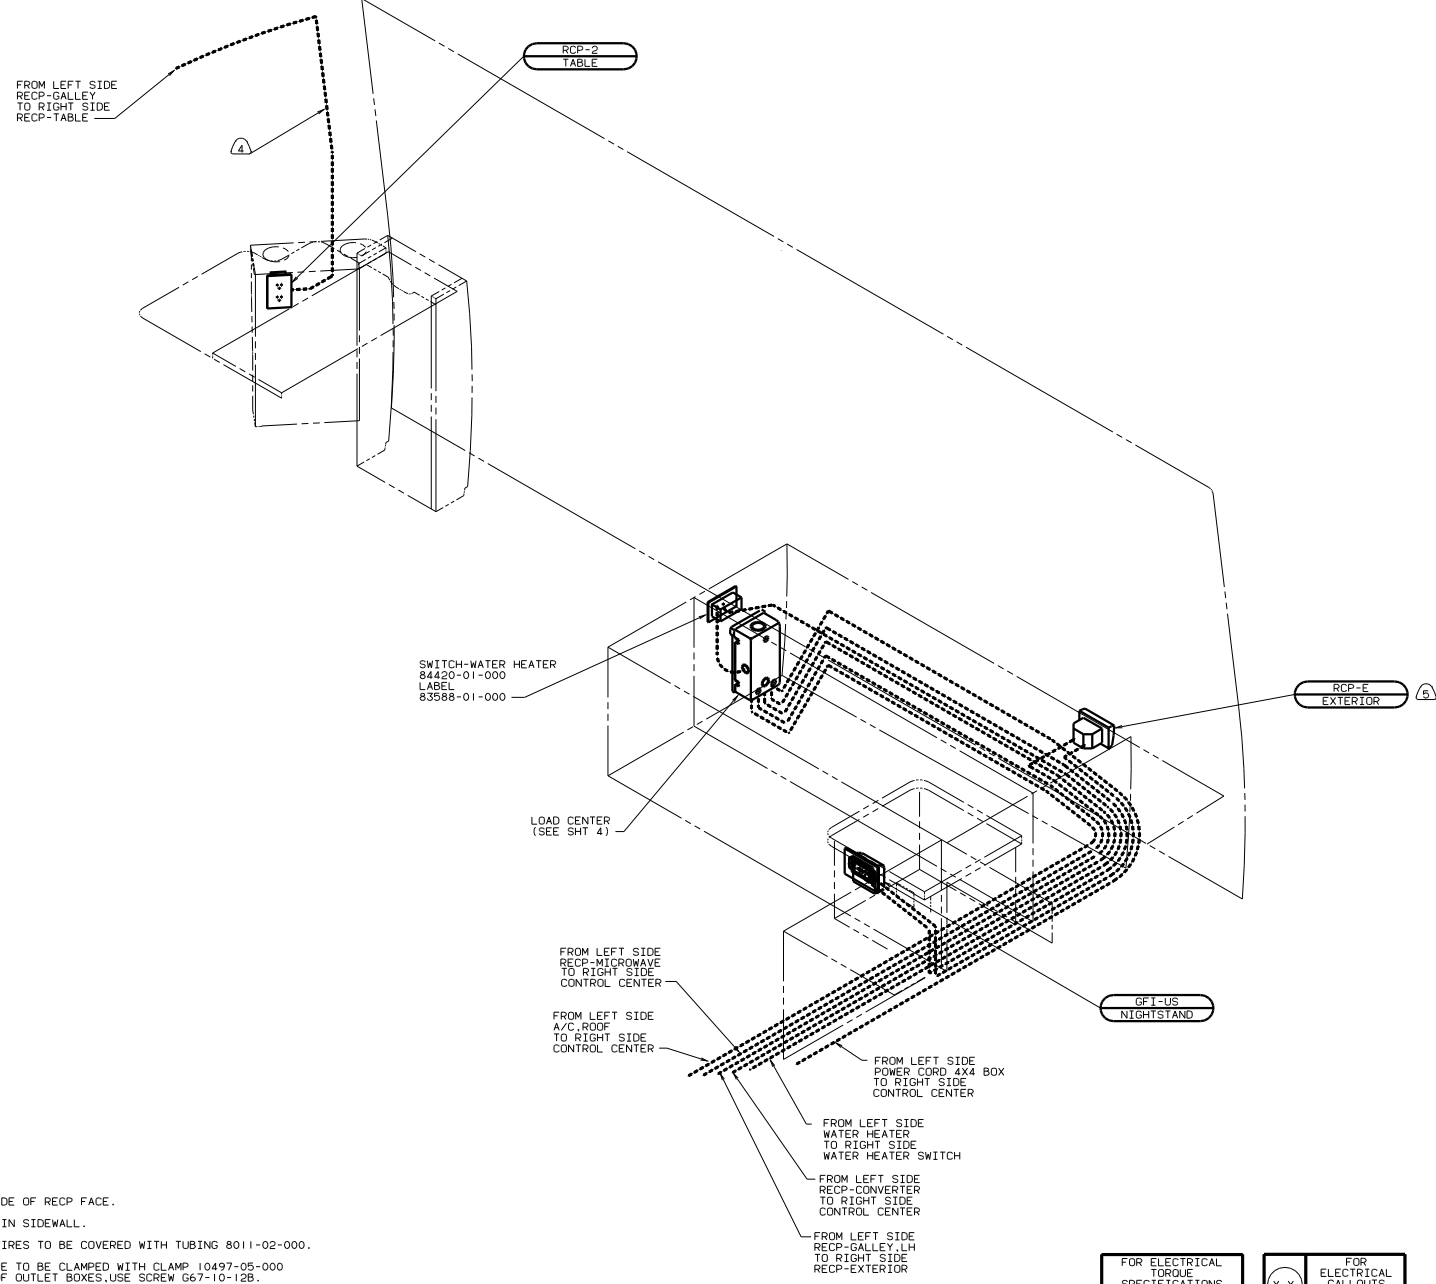

- 5 SEAL BACK SIDE OF RECP FACE.
- 4 WIRE ROUTED IN SIDEWALL.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8011-02-000.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES, USE SCREW G67-10-12B.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALL-OUTS
SEE DWG NO.
121339-01-000

98 222RC
45G BED-TWINS
1B1 CODE STANDARDS-USA


WIRING INSTL-BODY(110R30US)
SHEET 3 OF 14
124668

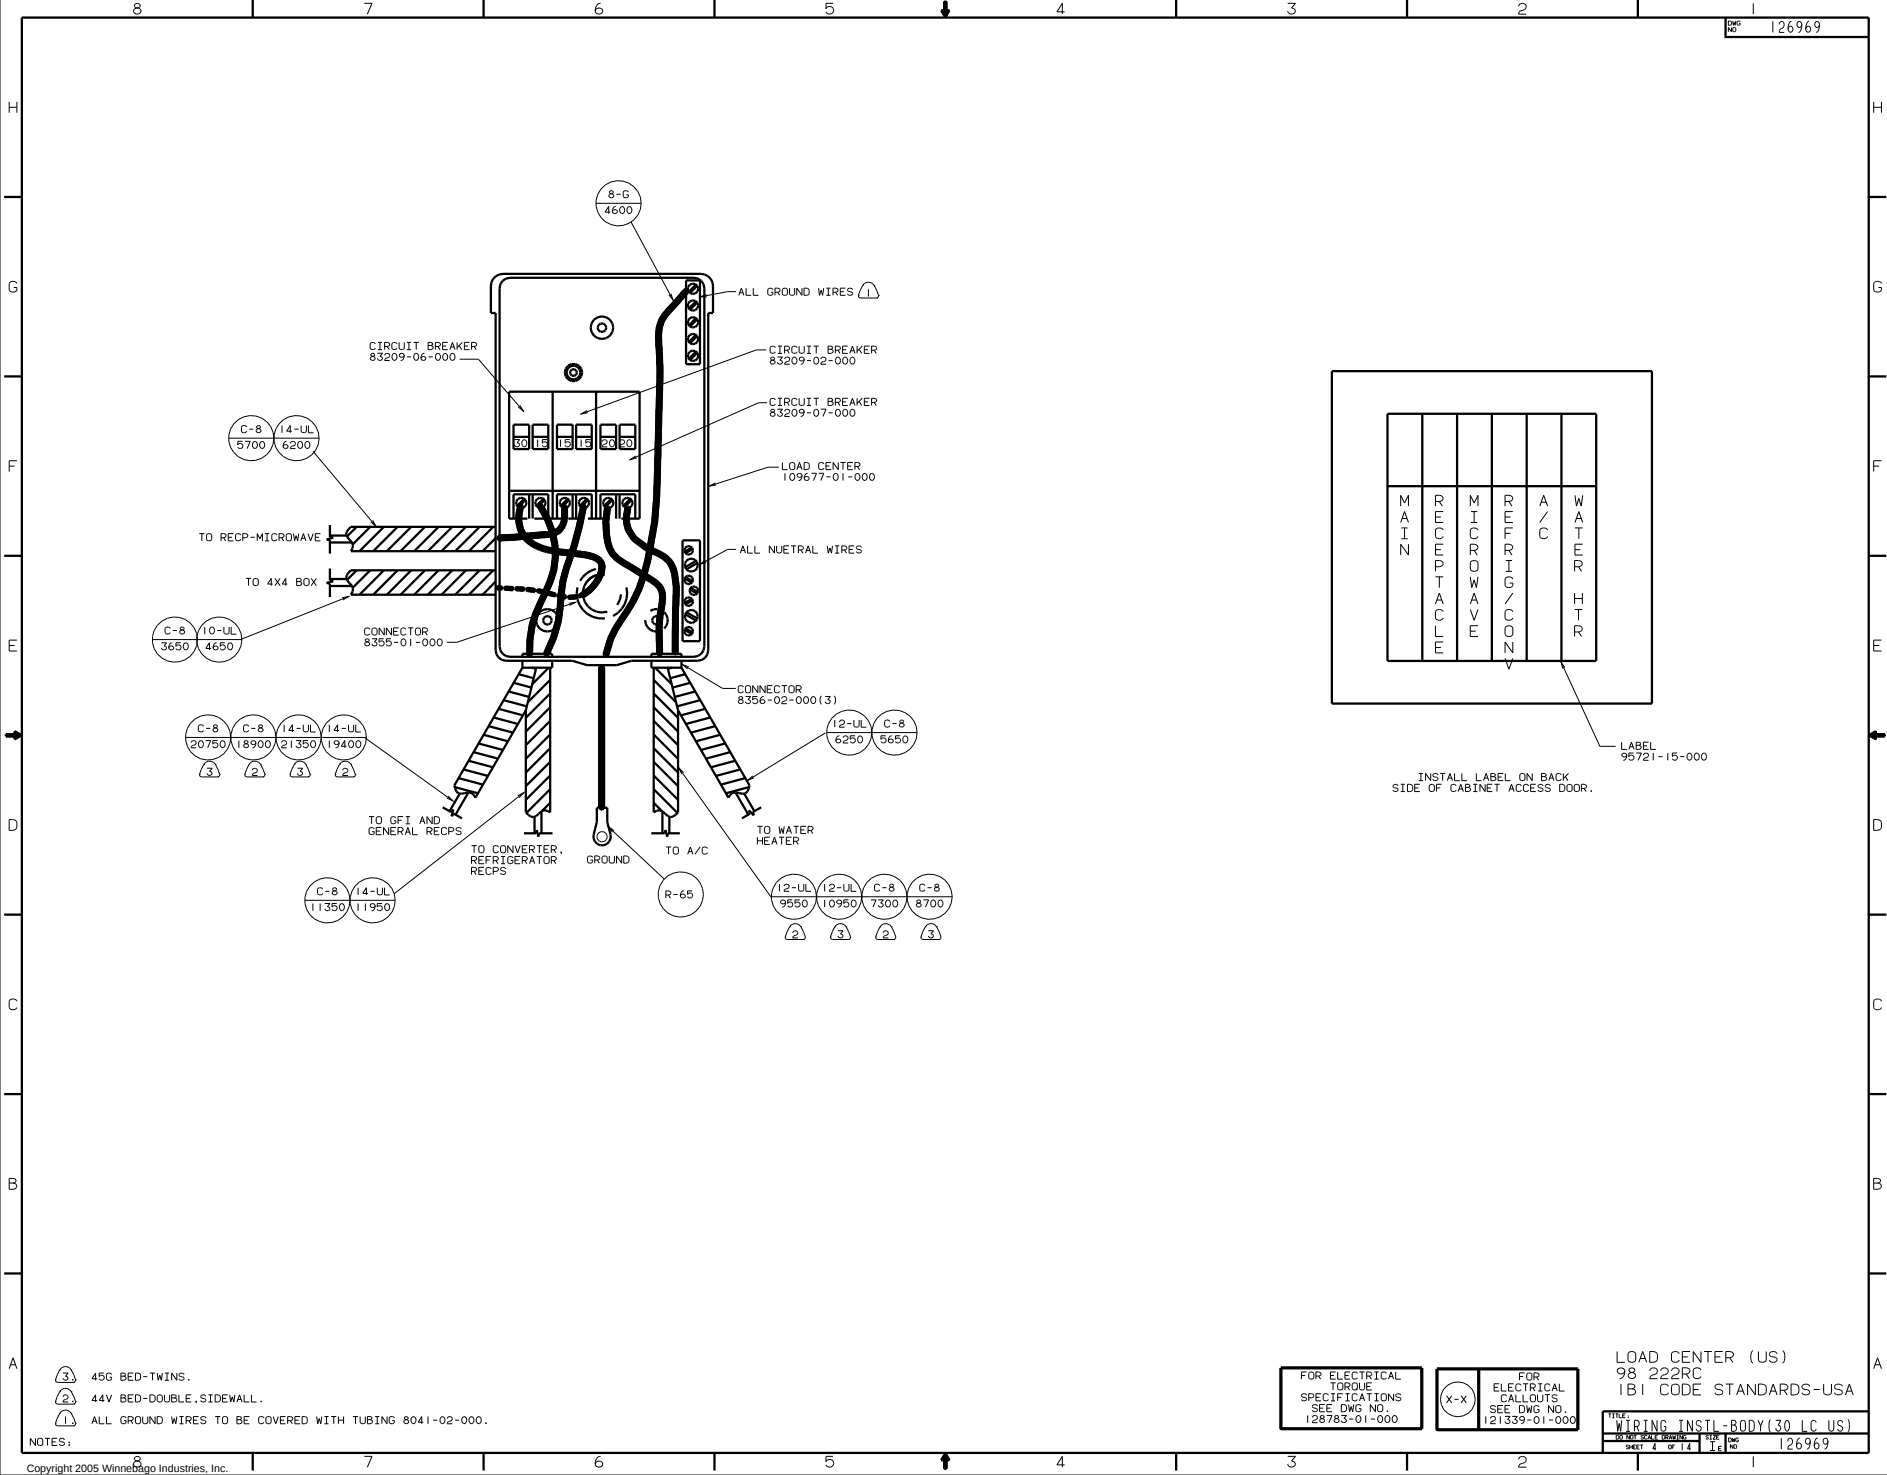

MAIN	RECEPTACLE	MICROWAVE	REFRIG/CON	A/C	WATER HTR
------	------------	-----------	------------	-----	-----------

LABEL 95721-15-000

INSTALL LABEL ON BACK SIDE OF CABINET ACCESS DOOR.

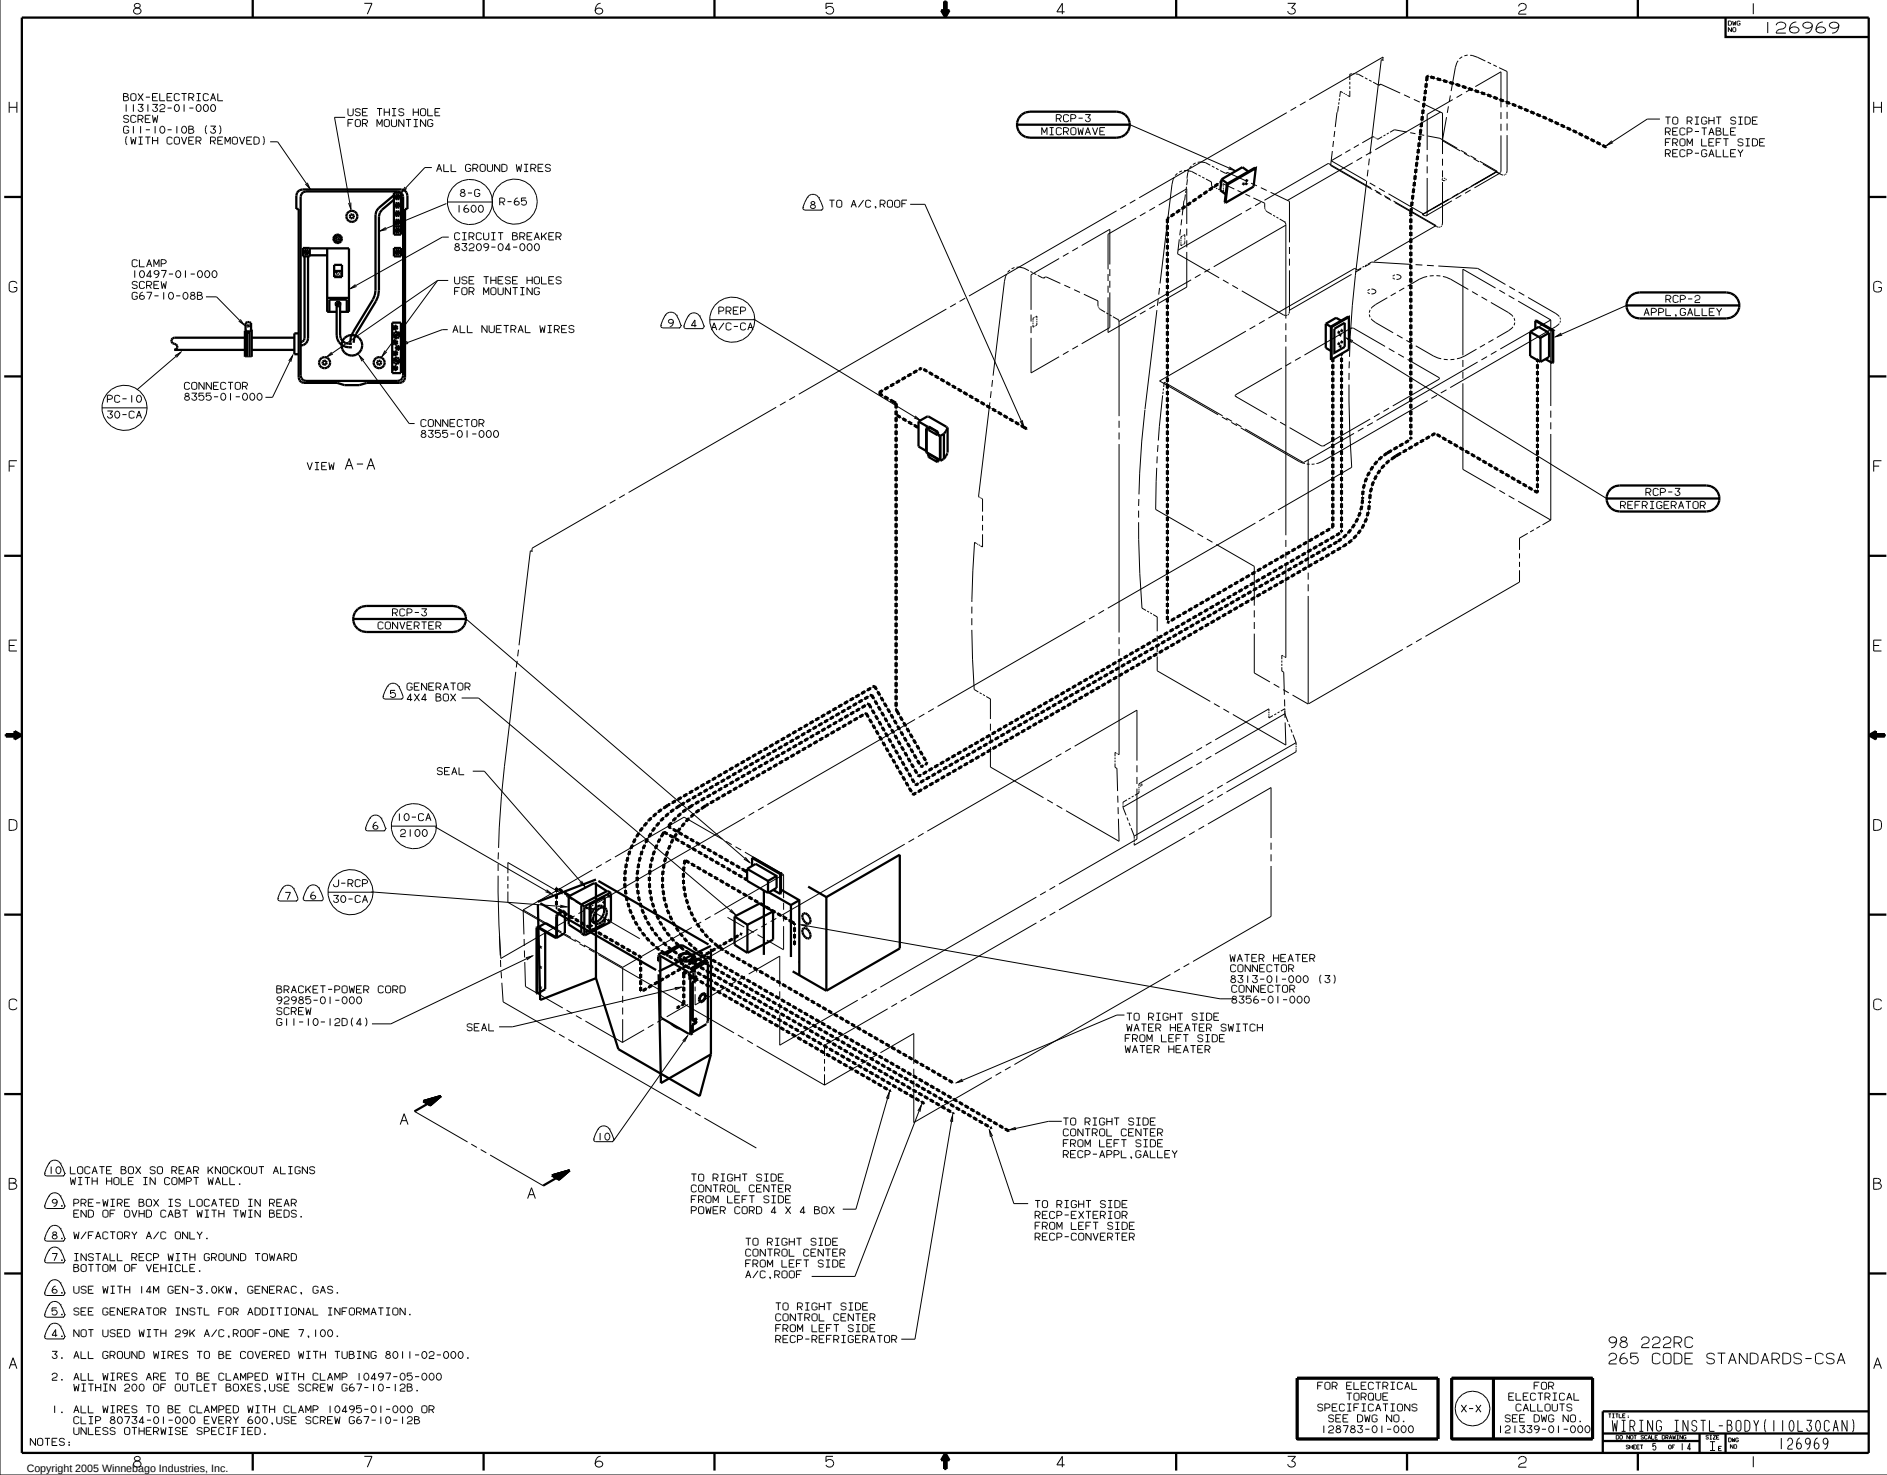

BOX-ELECTRICAL
113132-01-000
SCREW
G11-10-108 (3)
(WITH COVER REMOVED)

USE THIS HOLE
FOR MOUNTING

ALL GROUND WIRES

8-D
1600 R-65

CIRCUIT BREAKER
83209-04-000

USE THESE HOLES
FOR MOUNTING

ALL NUETRAL WIRES

CLAMP
10497-01-000
SCREW
G67-10-08B

CONNECTOR
8355-01-000
PC-10
30-CA

CONNECTOR
8355-01-000

VIEW A-A

RCP-3
MICROWAVE

TO RIGHT SIDE
RECP-TABLE
FROM LEFT SIDE
RECP-GALLEY

RCP-2
APPL.GALLEY

RCP-3
REFRIGERATOR

RCP-3
CONVERTER

GENERATOR
4X4 BOX

SEAL

10-CA
2100

J-RCP
30-CA

BRACKET-POWER CORD
92985-01-000
SCREW
G11-10-12D(4)

SEAL

WATER HEATER
CONNECTOR
8313-01-000 (3)
CONNECTOR
8356-01-000

TO RIGHT SIDE
WATER HEATER SWITCH
FROM LEFT SIDE
WATER HEATER

TO RIGHT SIDE
CONTROL CENTER
FROM LEFT SIDE
RECP-APPL.GALLEY

TO RIGHT SIDE
CONTROL CENTER
FROM LEFT SIDE
POWER CORD 4 X 4 BOX

TO RIGHT SIDE
CONTROL CENTER
FROM LEFT SIDE
A/C,ROOF

TO RIGHT SIDE
CONTROL CENTER
FROM LEFT SIDE
RECP-REFRIGERATOR

- 10 LOCATE BOX SO REAR KNOCKOUT ALIGNS WITH HOLE IN COMPT WALL.
- 9 PRE-WIRE BOX IS LOCATED IN REAR END OF OVHD CABT WITH TWIN BEDS.
- 8 W/FACTORY A/C ONLY.
- 7 INSTALL RECP WITH GROUND TOWARD BOTTOM OF VEHICLE.
- 6 USE WITH 14M GEN-3.0KW. GENERAC. GAS.
- 5 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
- 4 NOT USED WITH 29K A/C,ROOF-ONE 7.100.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8011-02-000.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES,USE SCREW G67-10-12B.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600,USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

98 222RC
265 CODE STANDARDS-CSA

WIRING INSTL-BODY(110130CAN)

5 OF 14

126969

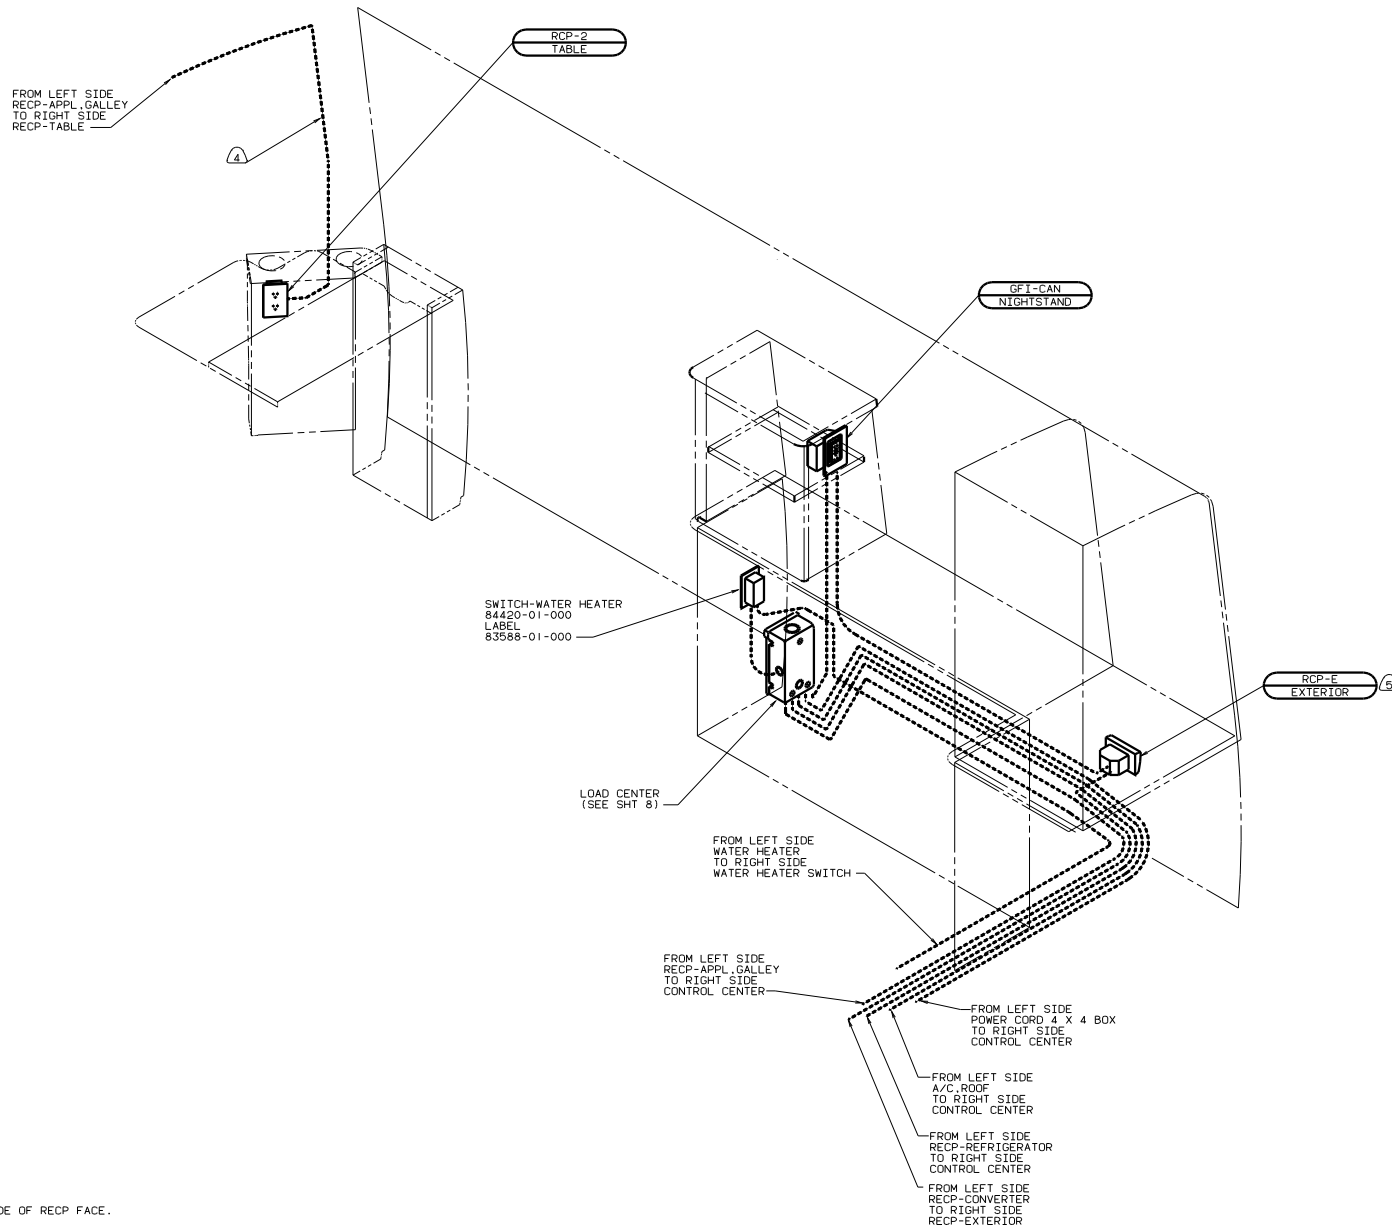

- 5 SEAL BACK SIDE OF RECP FACE.
- 4 WIRE ROUTED IN SIDEWALL.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8011-02-000.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES, USE SCREW G67-10-12B.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

98 222RC
44V BED-DOUBLE, SIDEWALL
265 CODE STANDARDS-CSA

FILE
WIRING INSTL-BODY(110R30CAN)
SHEET 5 OF 14
126969

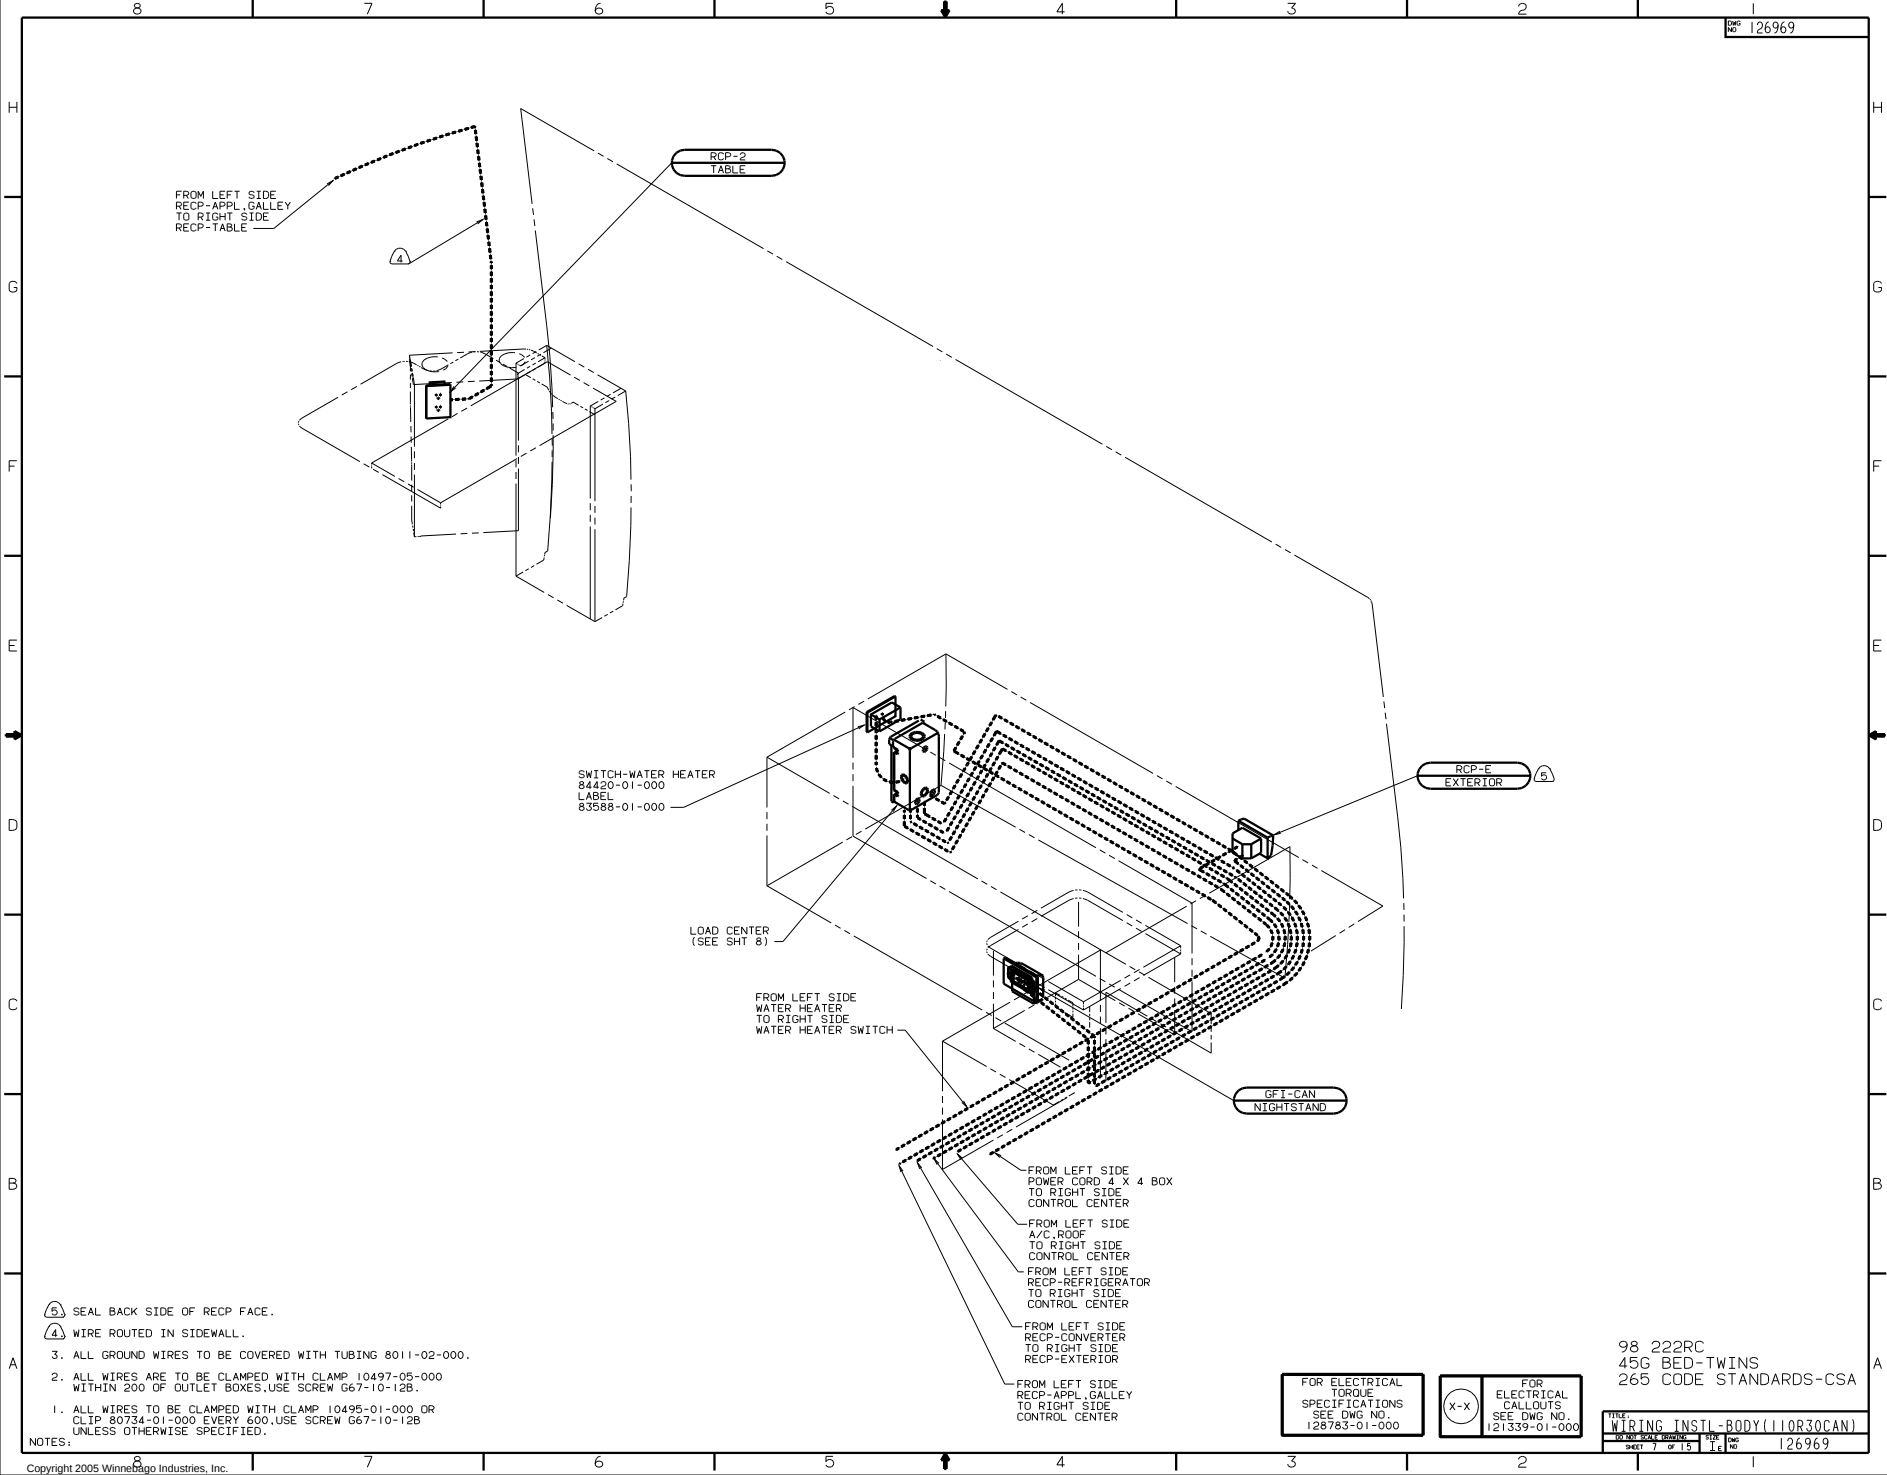

FROM LEFT SIDE
RECP-APPL. GALLEY
TO RIGHT SIDE
RECP-TABLE

RCP-2
TABLE

SWITCH-WATER HEATER
84420-01-000
LABEL
83588-01-000

LOAD CENTER
(SEE SHT 8)

FROM LEFT SIDE
WATER HEATER
TO RIGHT SIDE
WATER HEATER SWITCH

RCP-E
EXTERIOR

GFI-CAN
NIGHTSTAND

FROM LEFT SIDE
POWER CORD 4 X 4 BOX
TO RIGHT SIDE
CONTROL CENTER

FROM LEFT SIDE
A/C ROOF
TO RIGHT SIDE
CONTROL CENTER

FROM LEFT SIDE
RECP-REFRIGERATOR
TO RIGHT SIDE
CONTROL CENTER

FROM LEFT SIDE
RECP-CONVERTER
TO RIGHT SIDE
RECP-EXTERIOR

FROM LEFT SIDE
RECP-APPL. GALLEY
TO RIGHT SIDE
CONTROL CENTER

5 SEAL BACK SIDE OF RECP FACE.

4 WIRE ROUTED IN SIDEWALL.

3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8011-02-000.

2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000
WITHIN 200 OF OUTLET BOXES, USE SCREW G67-10-12B.

1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR
CLIP 80734-01-000 EVERY 600, USE SCREW G67-10-12B
UNLESS OTHERWISE SPECIFIED.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
126783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

98 222RC
45G BED-TWINS
265 CODE STANDARDS-CSA


WIRING INSTL-BODY(110R30CAN)
SHEET 7 OF 15
126969



MAIN	RECPS & CONV	APPLIANCE	REFR/MICRO	A/C	WATER HTR
------	--------------	-----------	------------	-----	-----------

LABEL 95721-16-000

INSTALL LABEL ON BACK SIDE OF CABINET ACCESS DOOR.

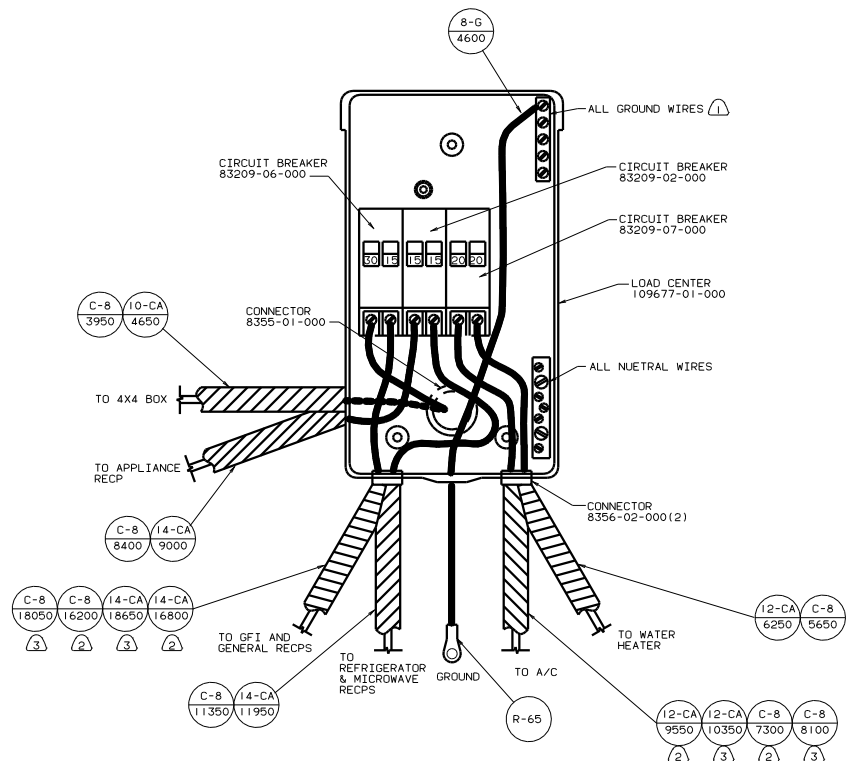



- NOTES:
- ③ WITH TWIN BEDS.
 - ② WITH DOUBLE BED.
 - ① ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128763-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

LOAD CENTER (CAN)
98 222RC
265 CODE STANDARDS-CSA


WIRING INSTL-BODY(30 LC CAN)
SHEET 8 OF 14
126969

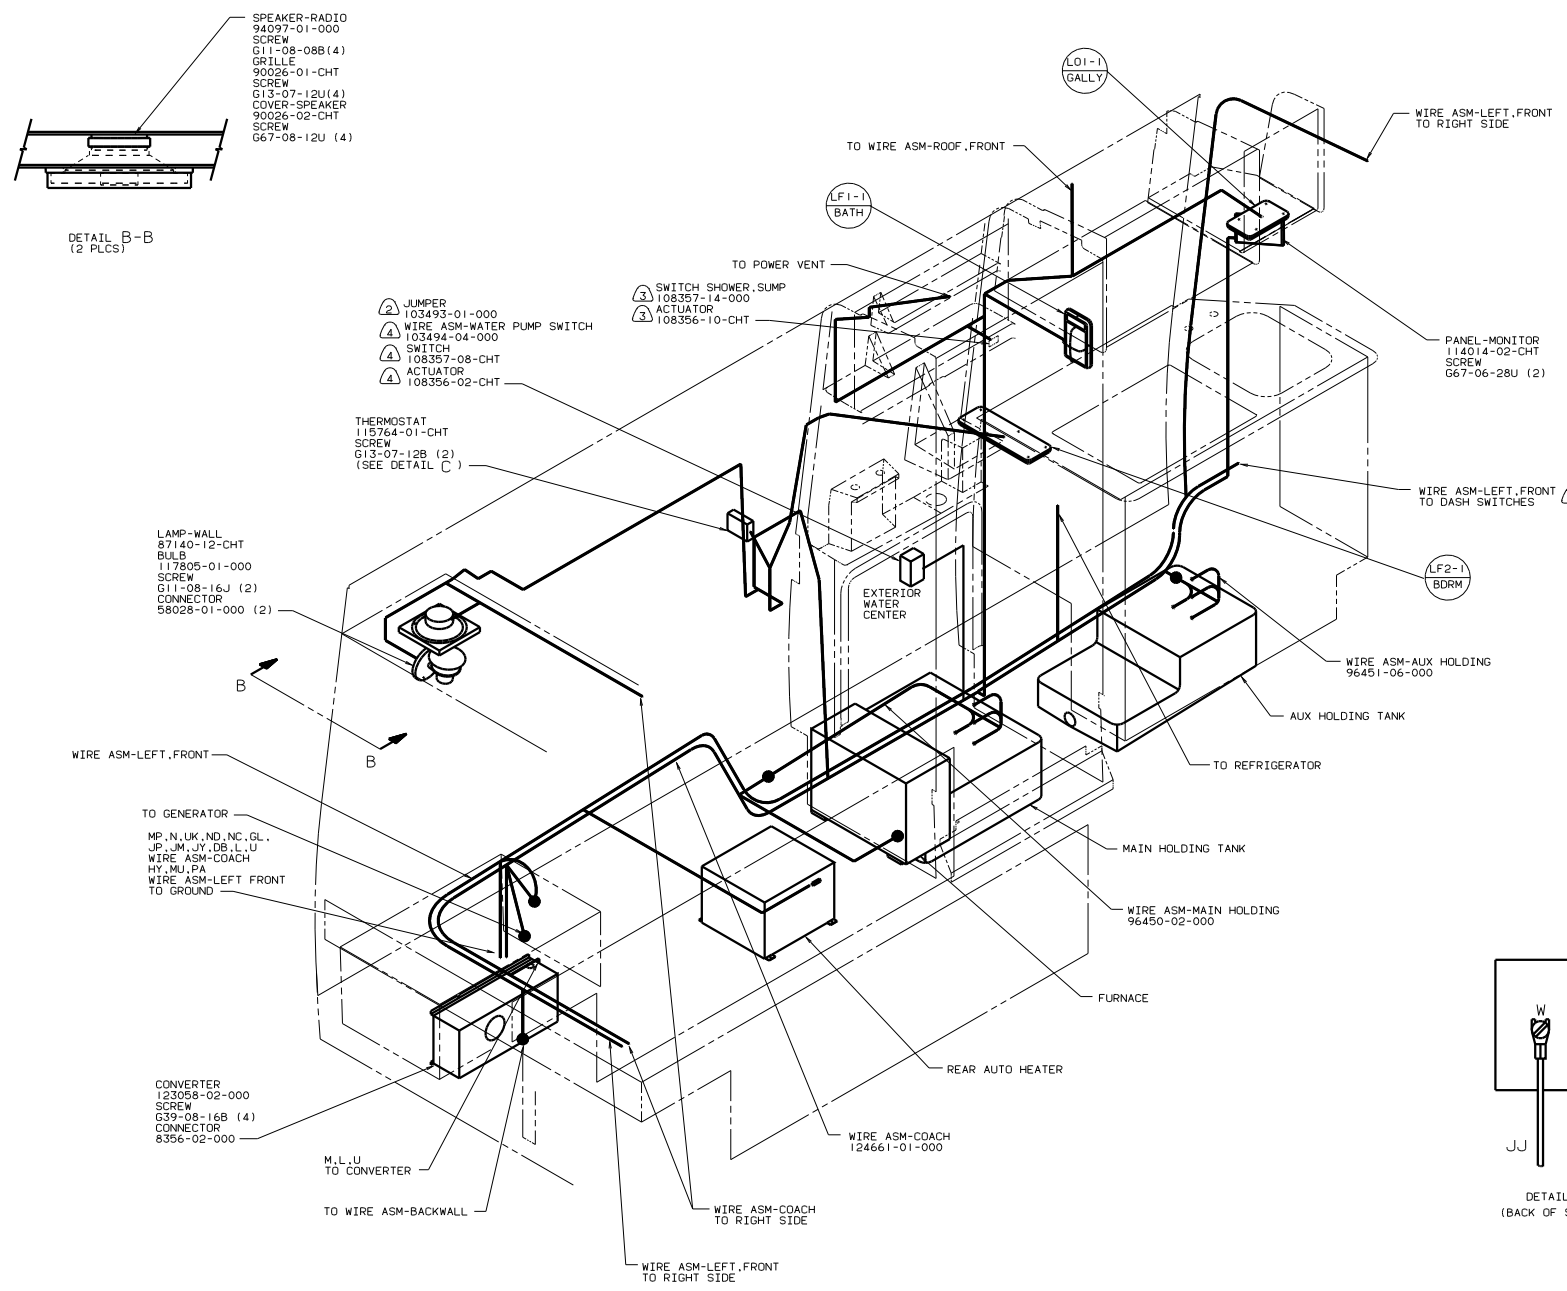

- NOTES:
- ④ 64R EXTERIOR WASH PACKAGE.
 - ③ 140 SHOWER PACKAGE.
 - ② NOT USED WITH 64R EXTERIOR WASH STATION.
 - ① SEE DRAWING INSTL-FRONT END FOR ADDITIONAL INFORMATION.

12V LEFT (US/CAN)
98 222RC
44V BED-DOUBLE, SIDEWALL
265 CODE STANDARDS-CSA
181 CODE STANDARDS-USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
--	--

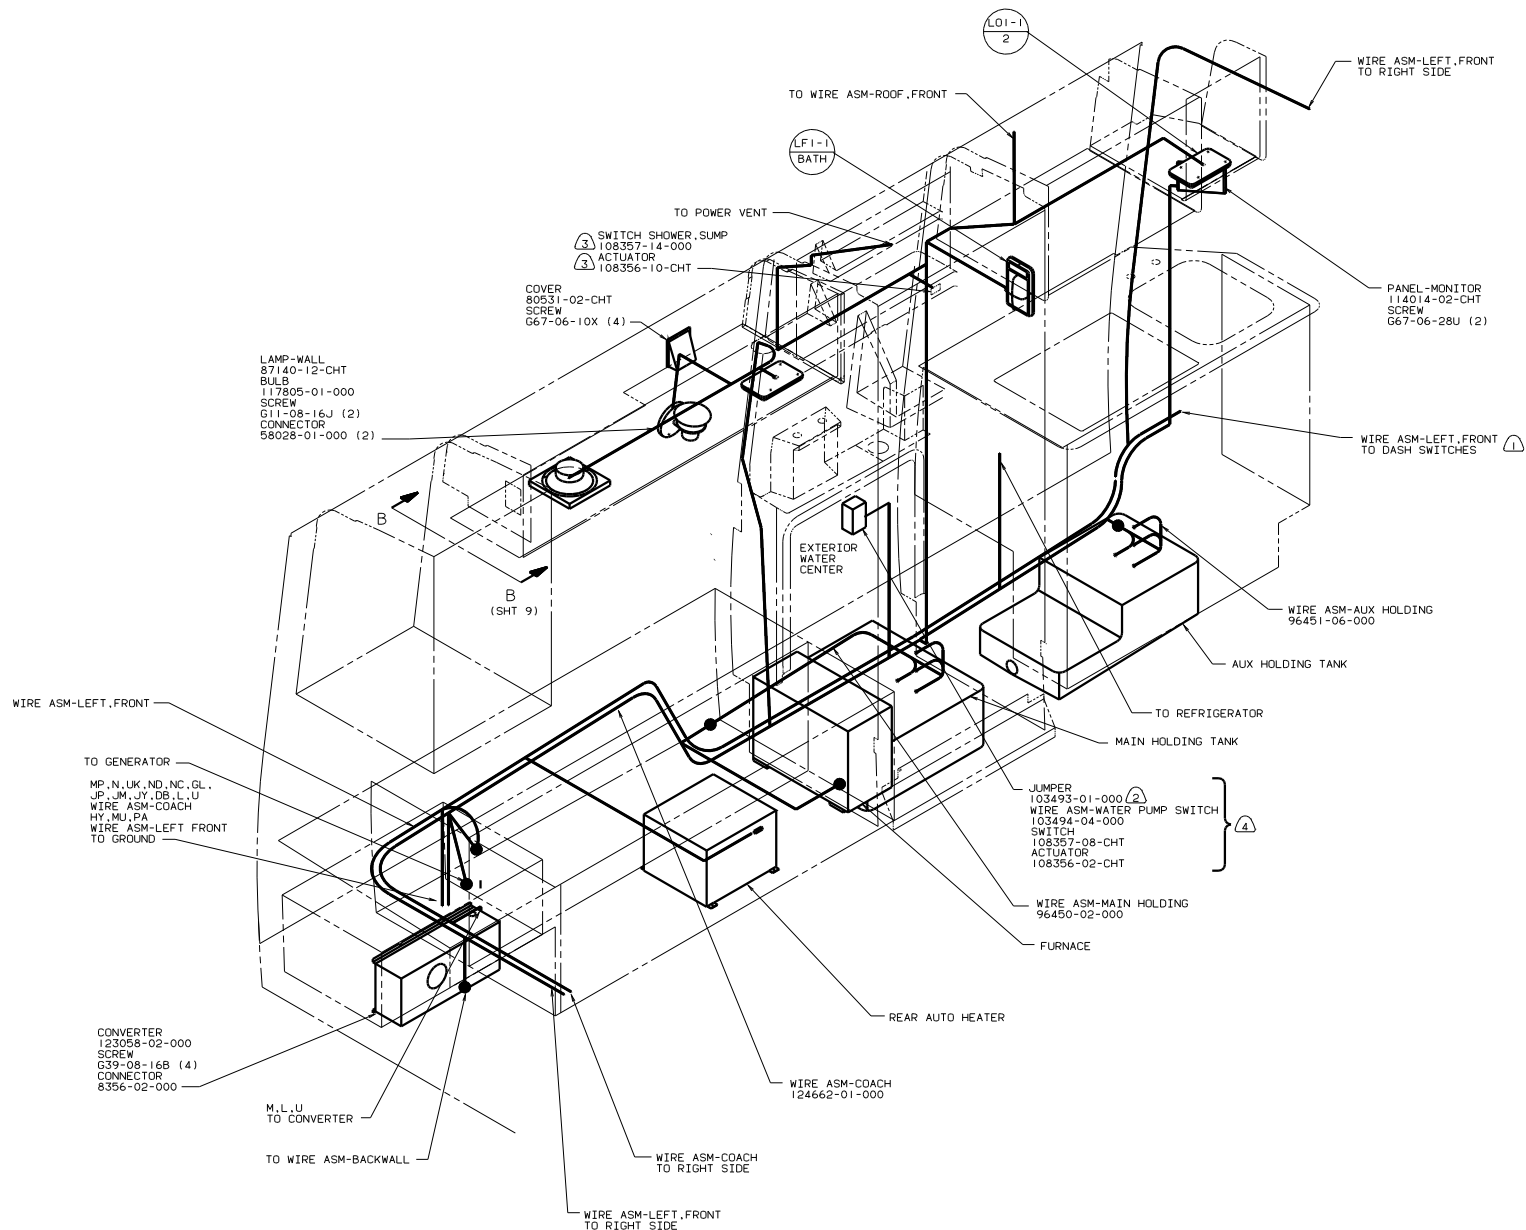


- ④ 64R EXTERIOR SHOWER PACKAGE.
- ③ 140 SHOWER PACKAGE.
- ② NOT USED WITH 64R EXTERIOR WASHER STATION.
- ① SEE DRAWING INSTL-FRONT END FOR ADDITIONAL INFORMATION.

12V LEFT (US/CAN)
98 222RC
45G BED-TWINS
1B1 CODE STANDARDS-USA
265 CODE STANDARDS-CSA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-00
-----	--


TITLE:		WIRING INSTL-BODY(12 L)	
DO NOT SCALE DRAWING	SIZE	DWG NO	126257
SHEET 10 OF 14	T E		

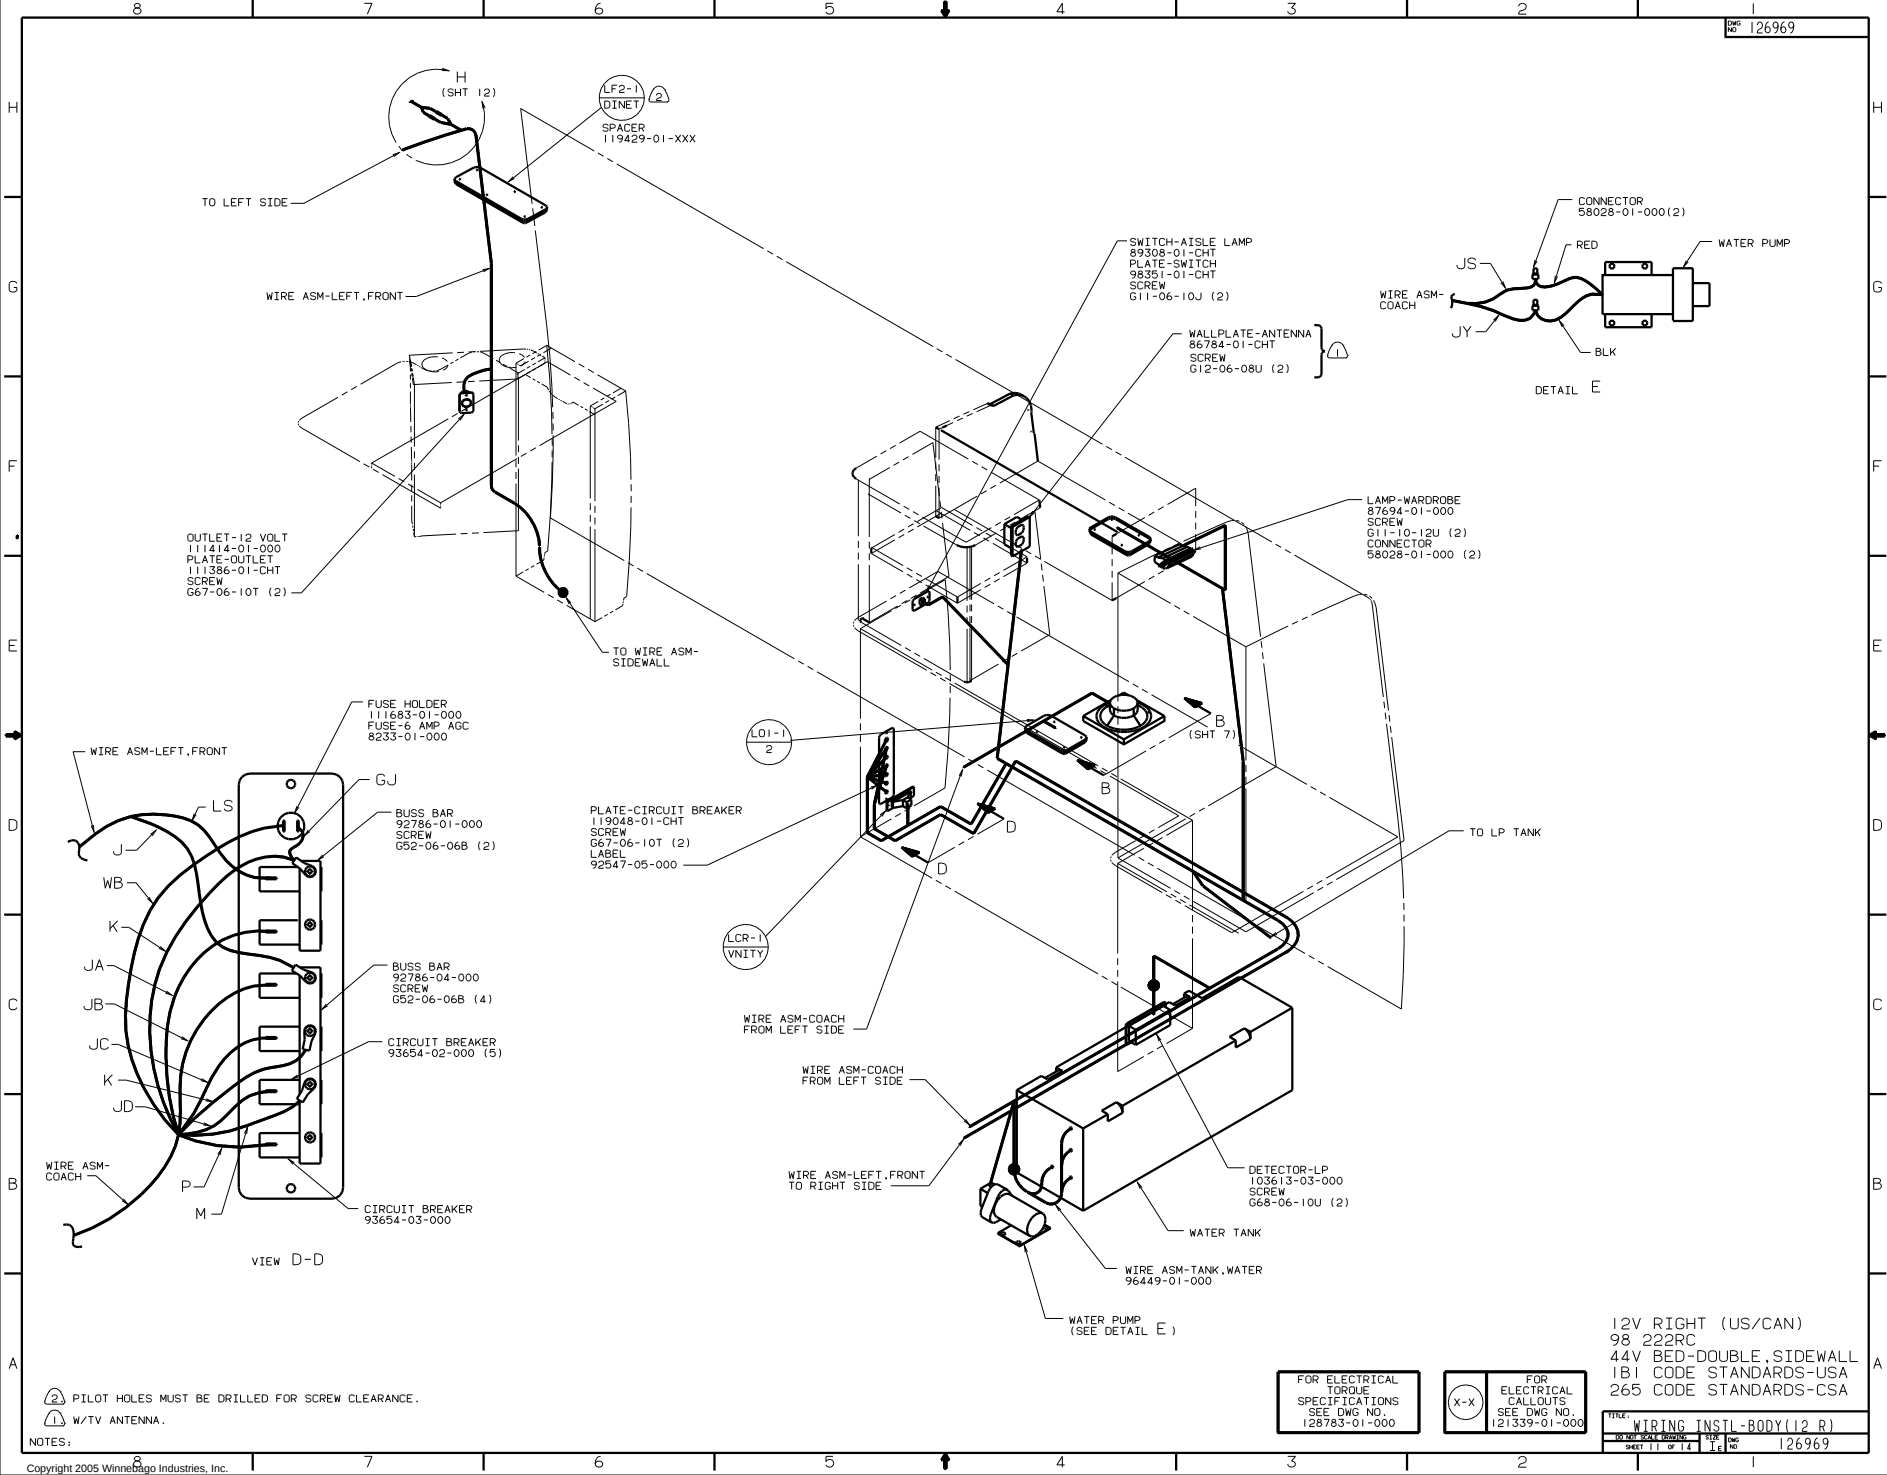


2 PILOT HOLES MUST BE DRILLED FOR SCREW CLEARANCE.

1 W/TV ANTENNA.

NOTES:

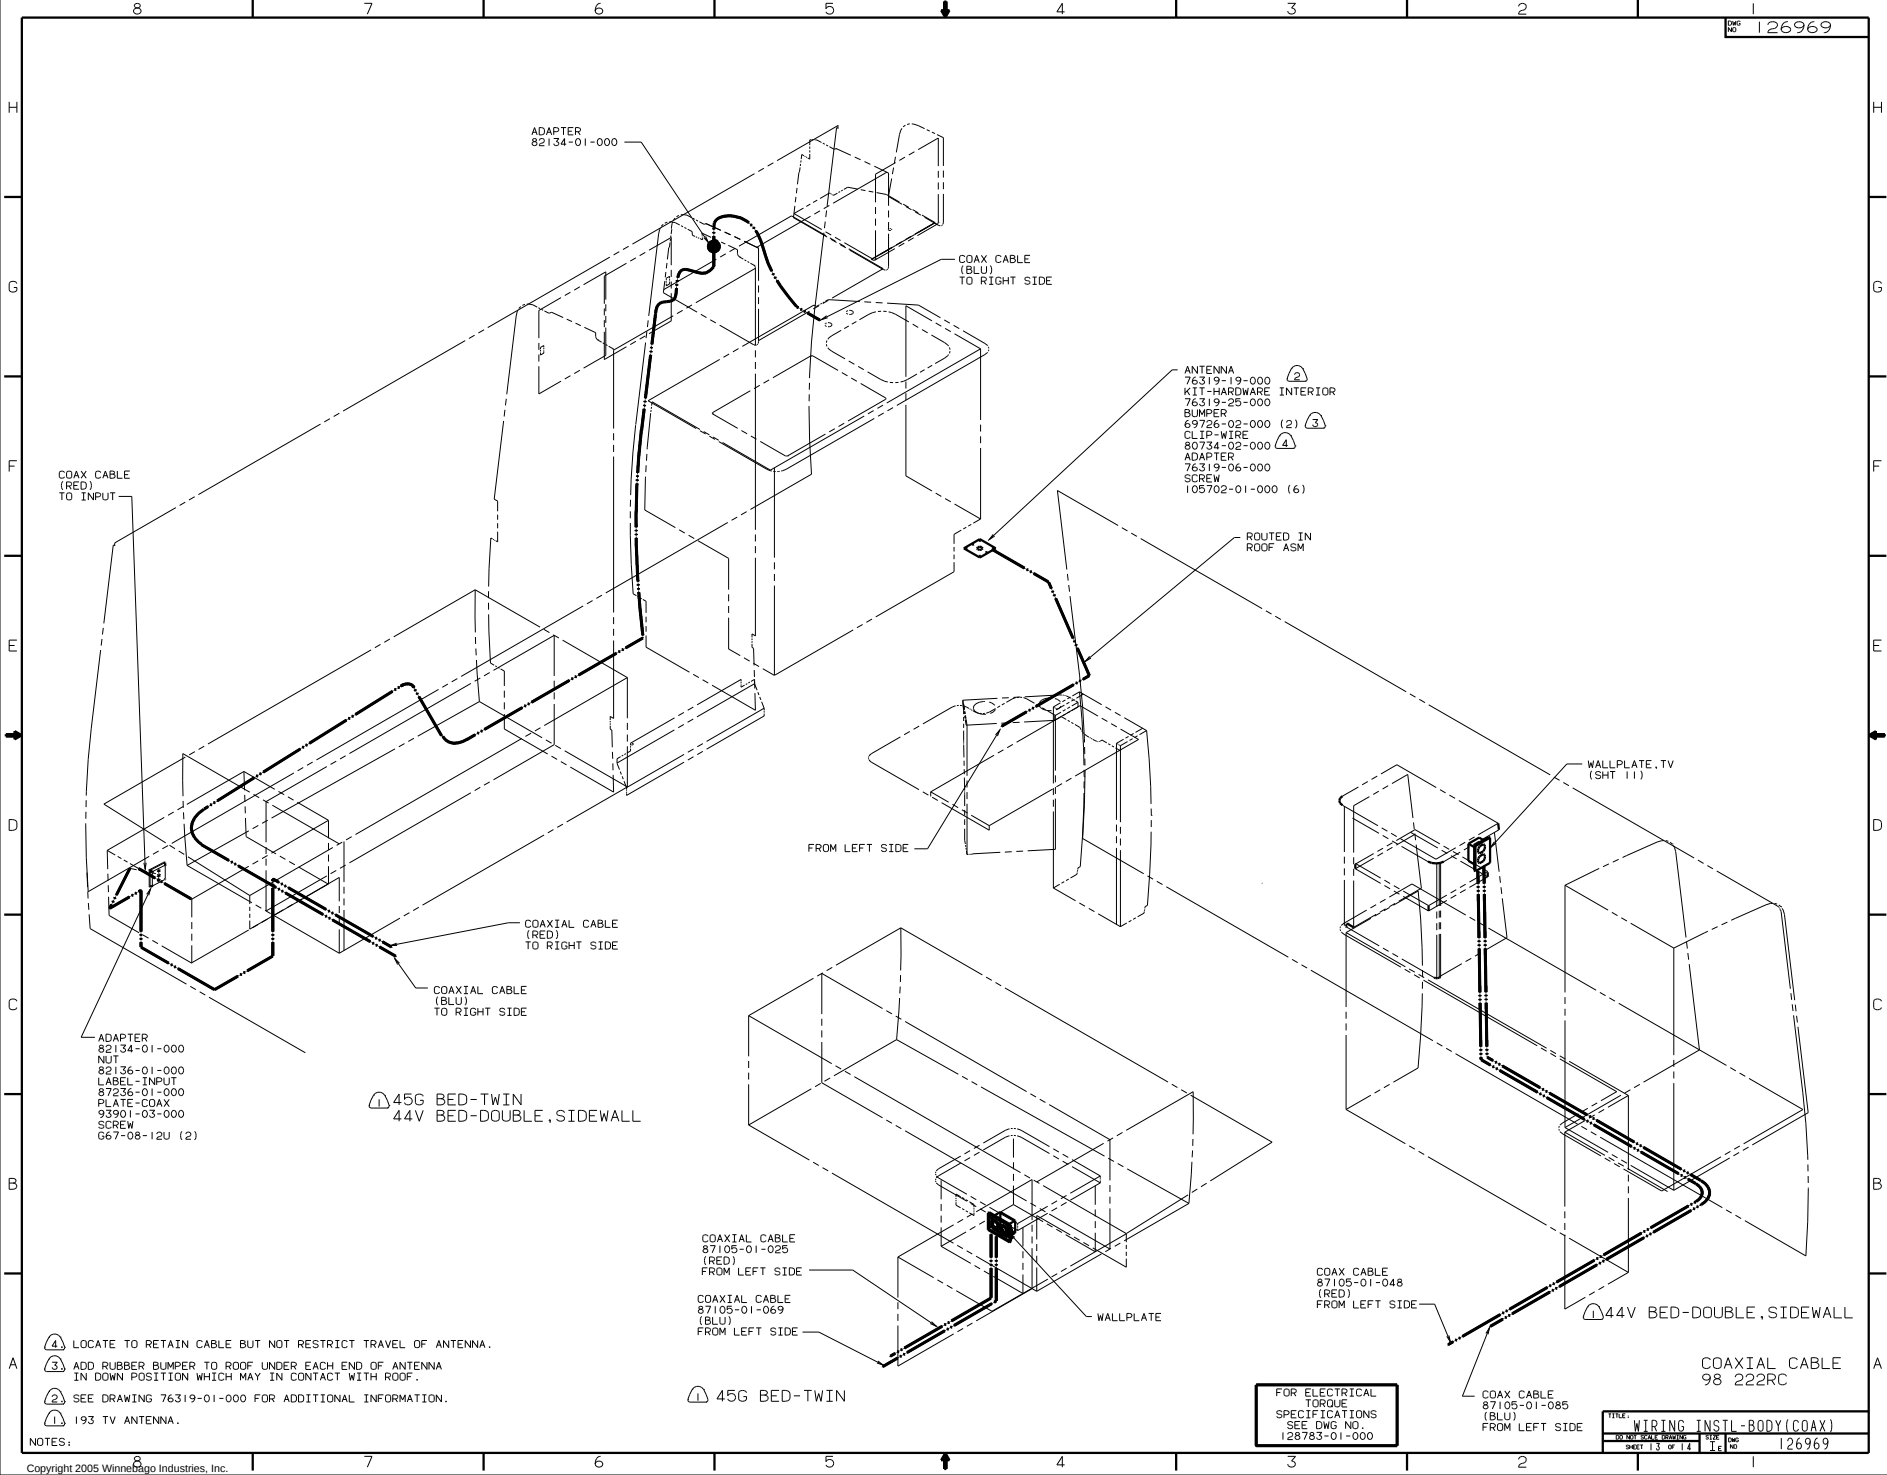



TITLE: WIRING INSTL-BODY			
DO NOT SCALE DRAWING		SIZE: T	DWG NO: 126969
SHEET 14 OF 14			

- NOTES: