




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.




CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

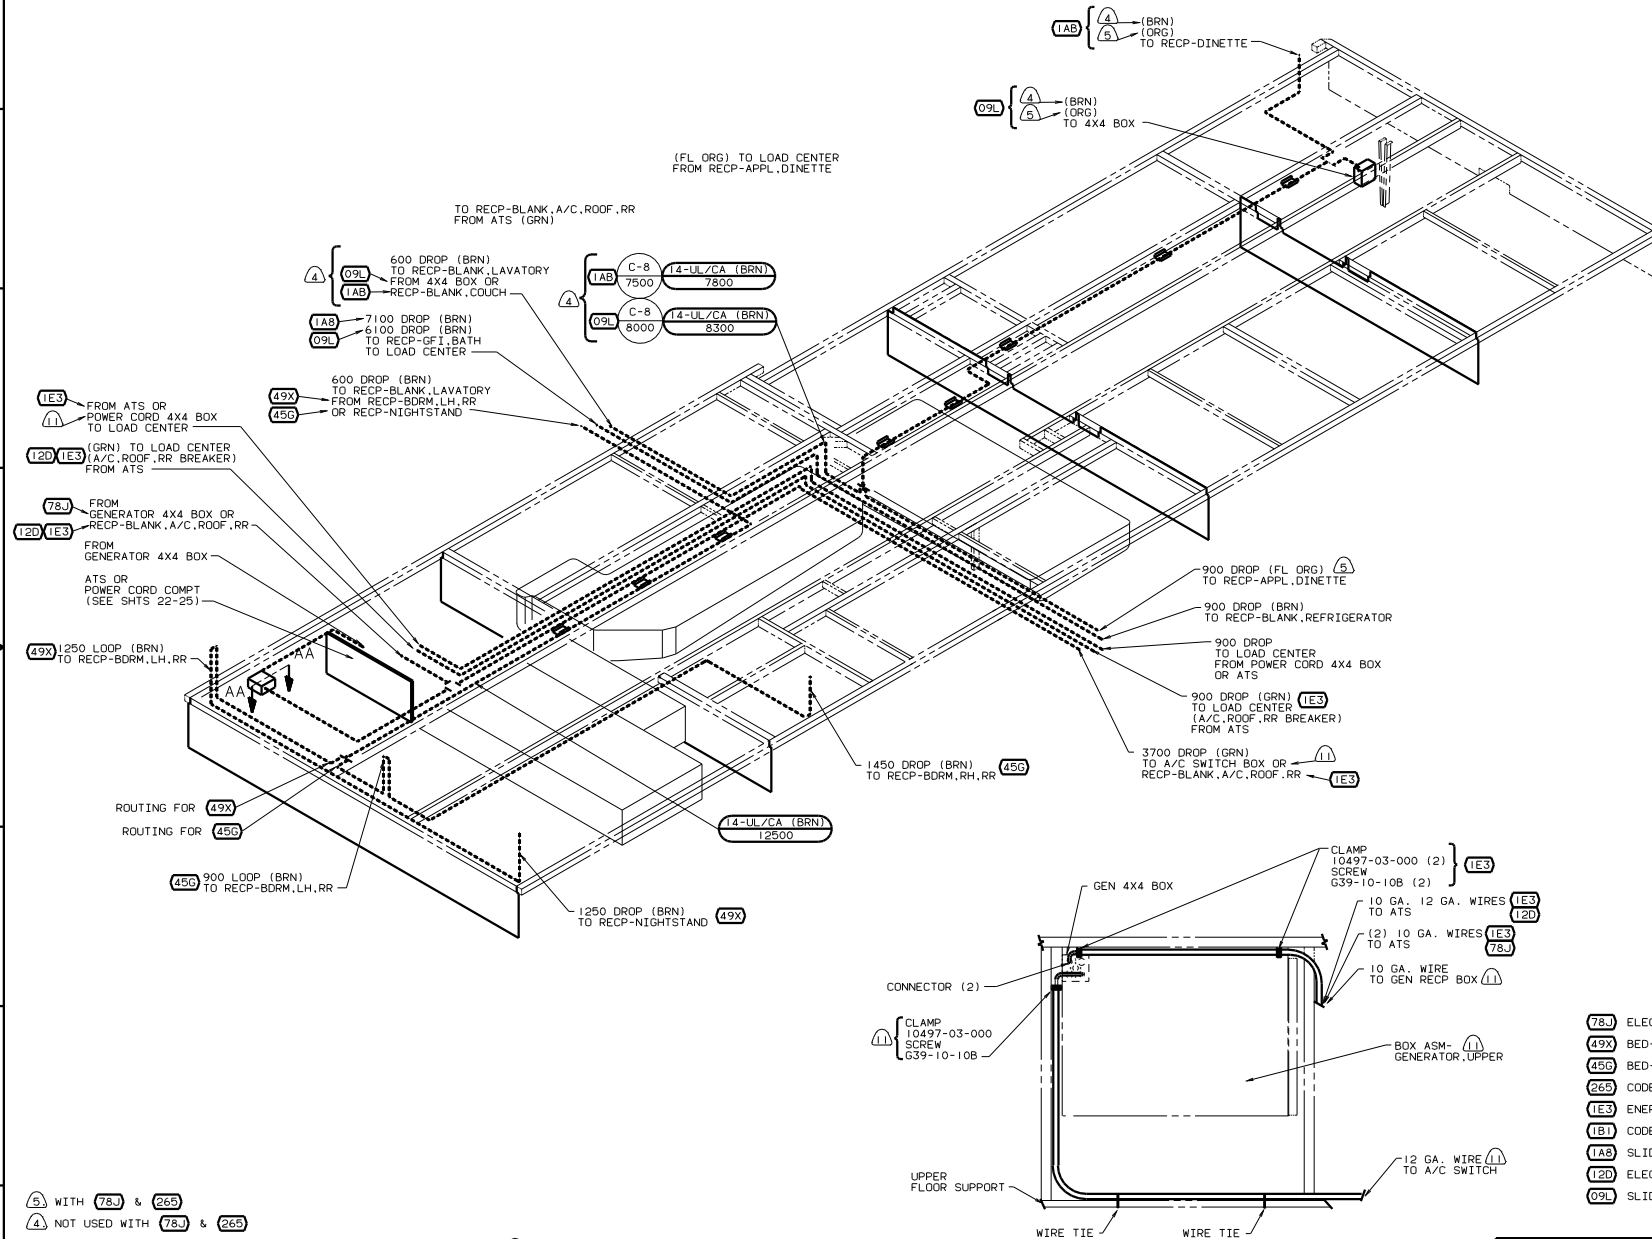

- 5) WITH 78J & 265
 4) NOT USED WITH 78J & 265
3. WIRES THAT REST ON WIRE TRAYS ARE TO BE TIED DOWN WITH WIRE TIE 8343-02-000.
2. CLAMP TO FLOOR SUPPORT TUBES AS NECESSARY WITH CLAMP 10497-01-000
1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 700, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

- 1) WITHOUT 1E3
 10) 265 CODE STANDARDS-CSA
 9) 120 ELECTRICAL SYS-30 AMP
 8) 78J ELECTRICAL SYS-50 AMP

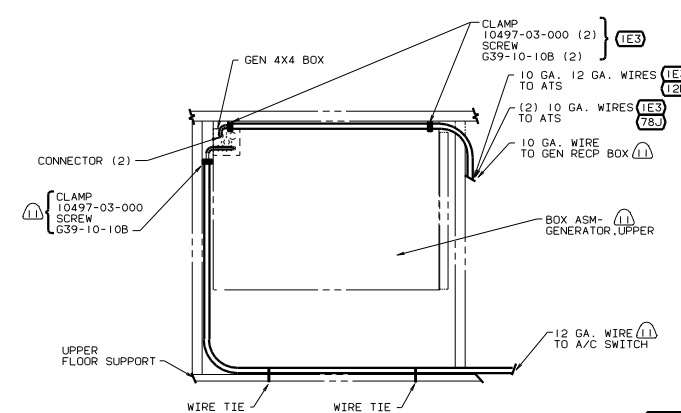

- 78J ELECTRICAL SYSTEM - 50 AMP
- 49X BED-QUEEN-BACKWALL
- 45G BED-TWINS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1E3 ENERGY MANAGEMNT SYSTEM
- 1B1 CODES STANDARDS/USA
- 1A8 SLIDEOUT ROOM FRONT LEFT W/O
- 120 ELECTRICAL SYSTEM 30 AMP
- 09L SLIDEOUT ROOM-FRONT LEFT

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWD NO. 128783-01-000





FOR ELECTRICAL CALLOUTS SEE DWD NO. 121339-01-000

DATE		UNSPECIFIED TOLERANCES ARE:		MATERIAL	
DATE	DATE	WHOLE OR 1/2"	+		
DATE	DATE	ONE-PLATE (1/8")	+		
DATE	DATE	TWO-PLATE (1/8")	+		
DATE	DATE	ANGLE			
DATE	DATE	THIRD ANGLE PROJECTION			
DATE	DATE				

WINNEBAGO 99 F & G35C

WIRING INSTL-BODY (110 BF)


REF: 126818 Z I 130596

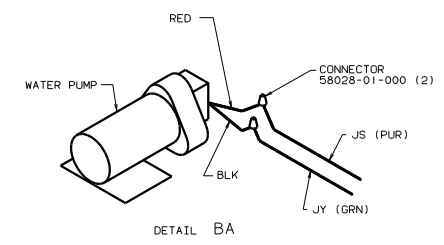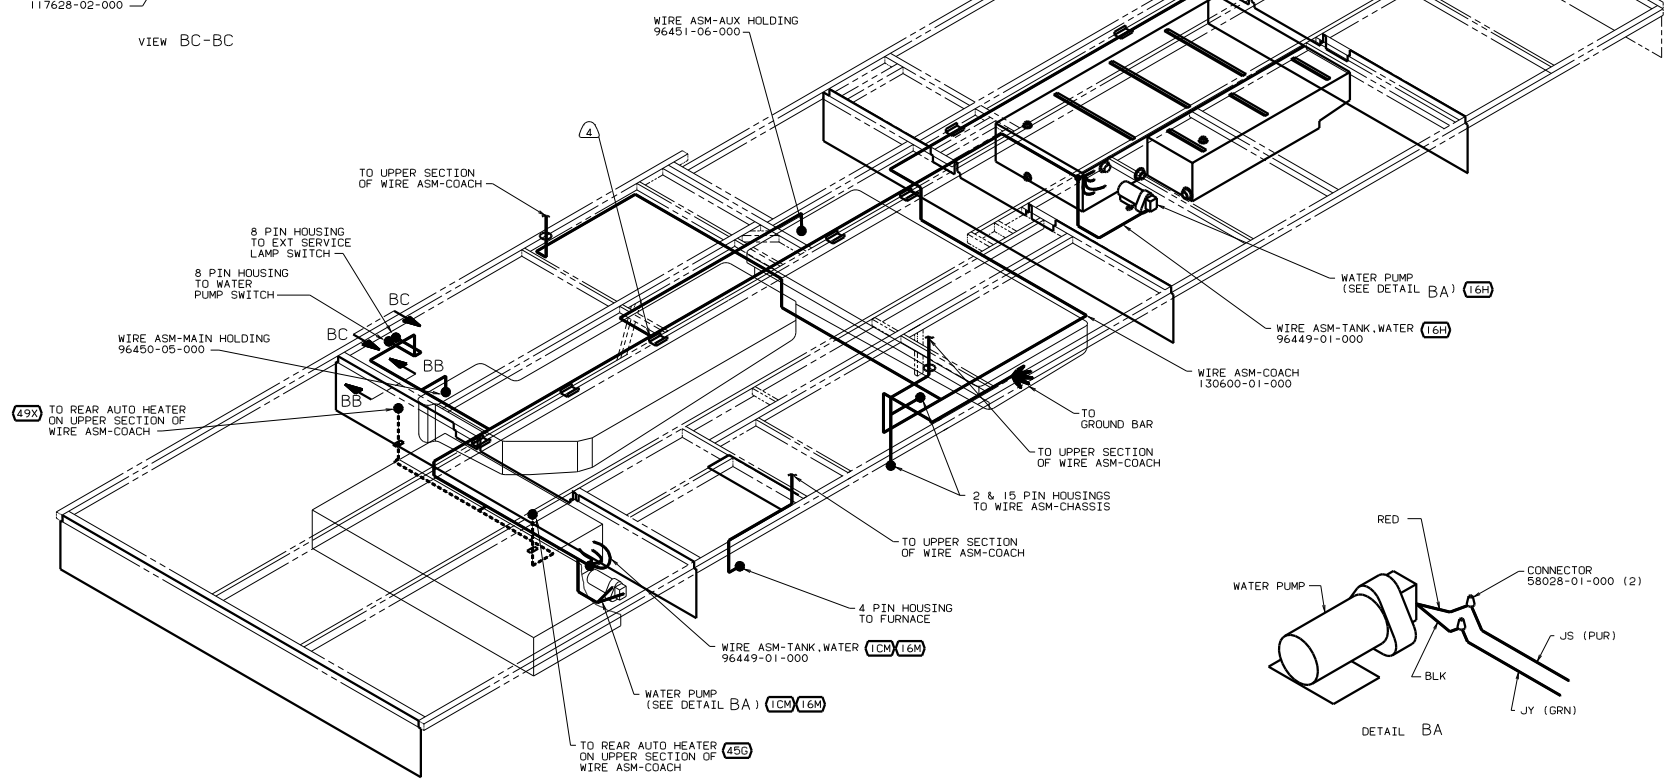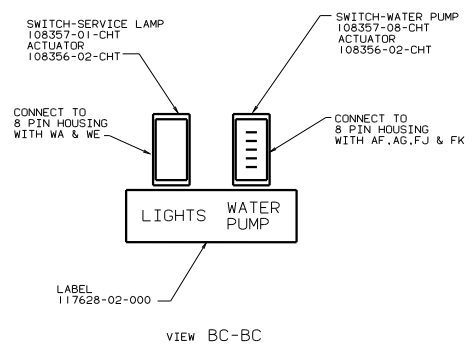

- 4 AT THIS POINT ROUTE WATER PUMP AND WATER TANK DROPS TO FRONT FOR (16M) AND TO REAR FOR (1CM) AND (16M).
3. WIRES THAT REST ON WIRE TRAYS ARE TO BE TIED DOWN WITH WIRE TIE 8343-02-000.
2. CLAMP TO FLOOR SUPPORT TUBES AS NECESSARY WITH CLAMP 10497-01-000
1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 700, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.


NOTES:


- (16M) FORD CHASSIS 20,500#/V10 ENG
- (16H) FORD CHASSIS 18,000#/V10 ENG
- (1CM) CHEVY CHASSIS 16,500 LB. GVWR
- (49X) BED-QUEEN-BACKWALL
- (45G) BED-TWINS
- (26S) CODES/STANDARDS-CSA/CMVSS
- (181) CODES STANDARDS/USA



99 F&G35C (181) (26S)

WIRING INSTL BODY (BL 12V)	
DATE	REV
10/10/00	1
SHEET 2 OF 33	
130596	

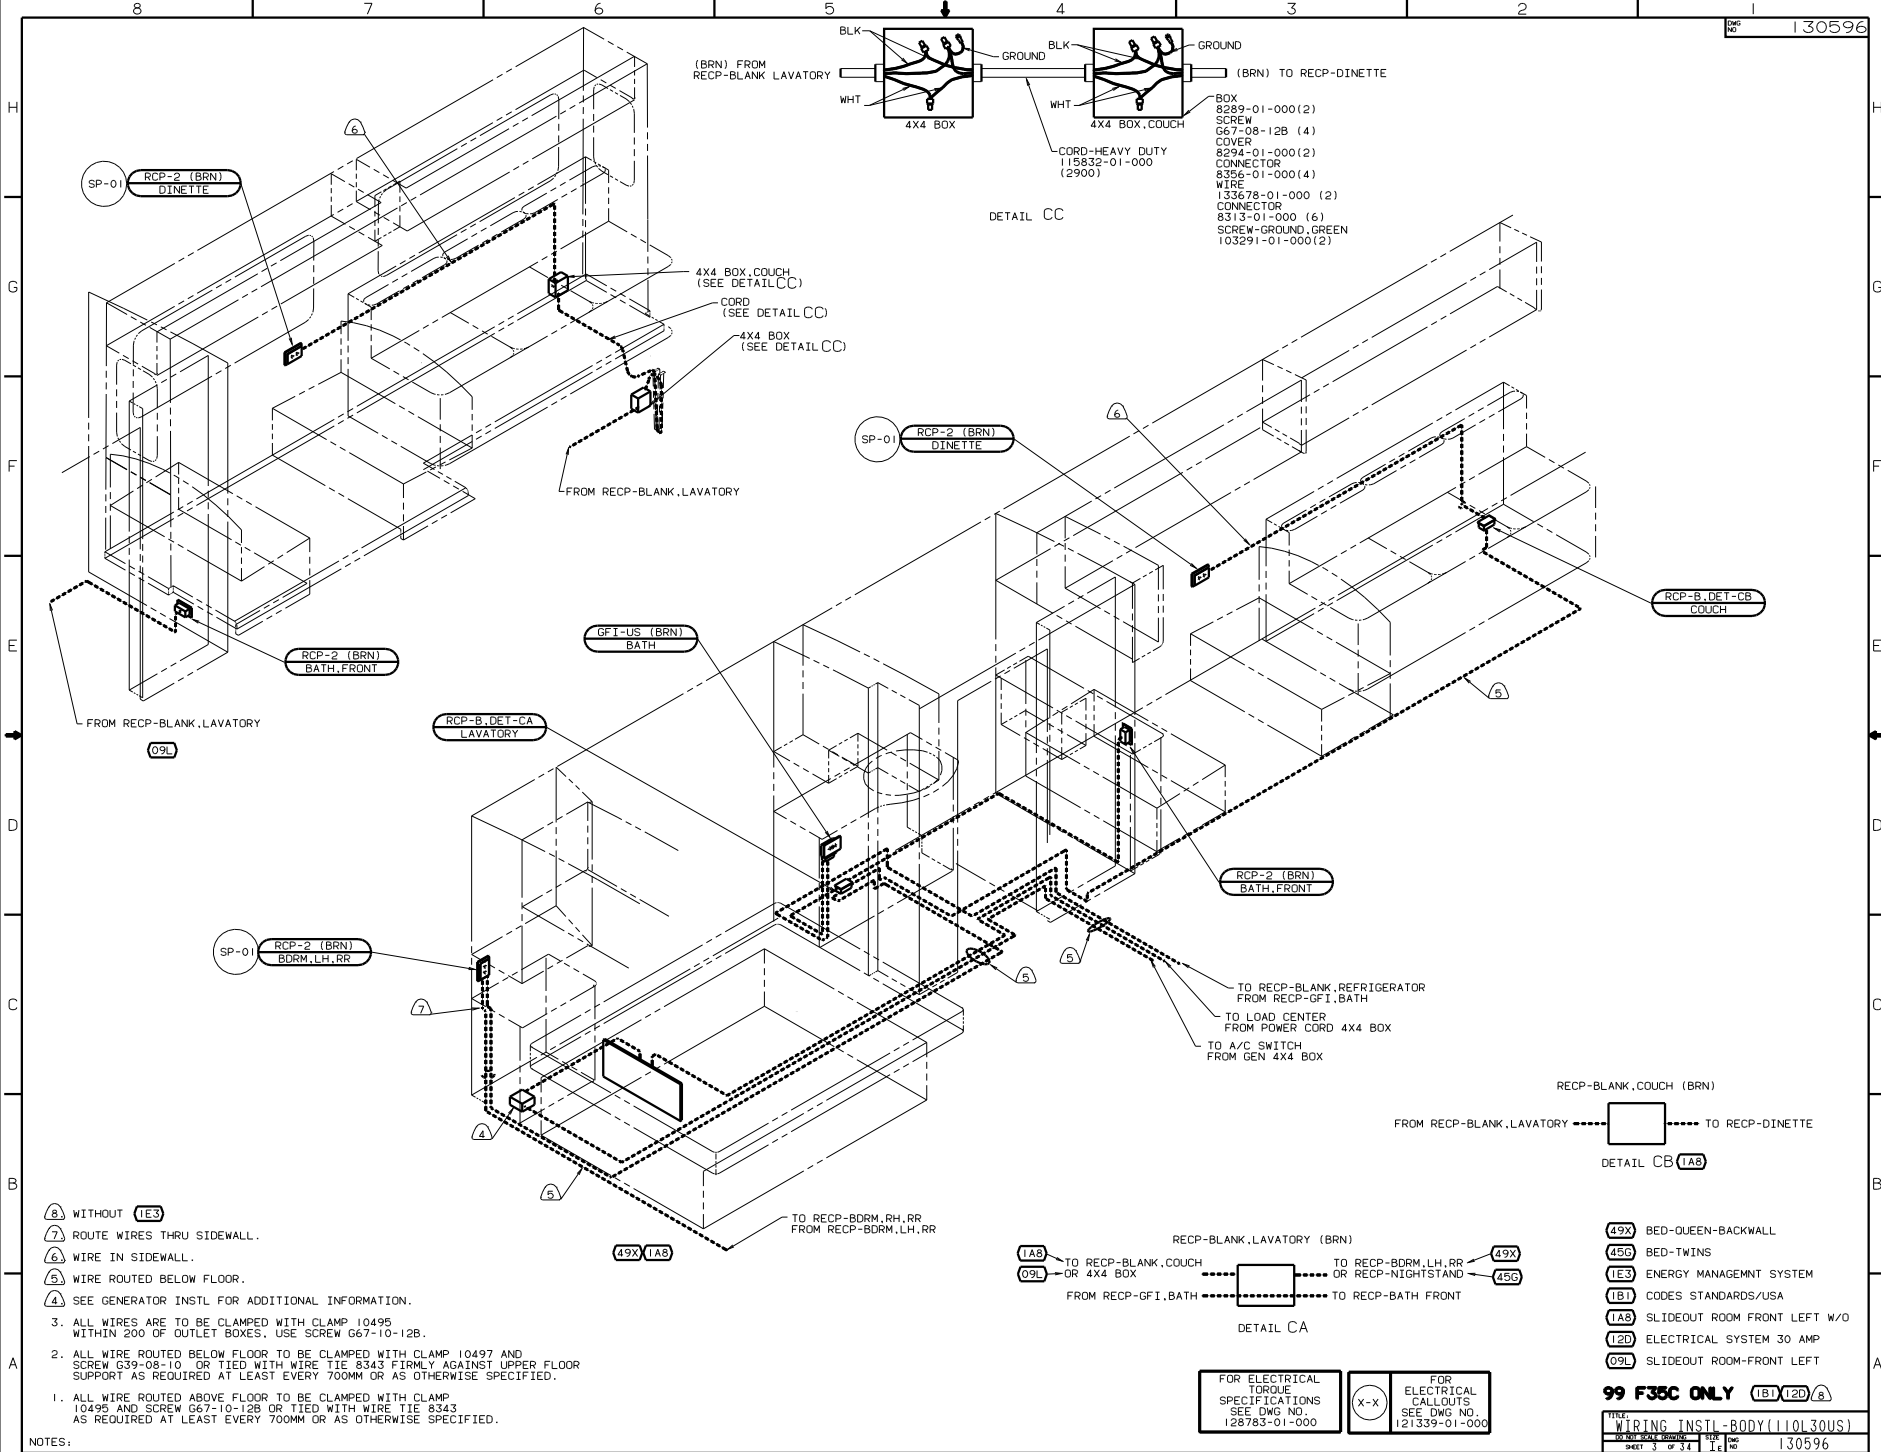

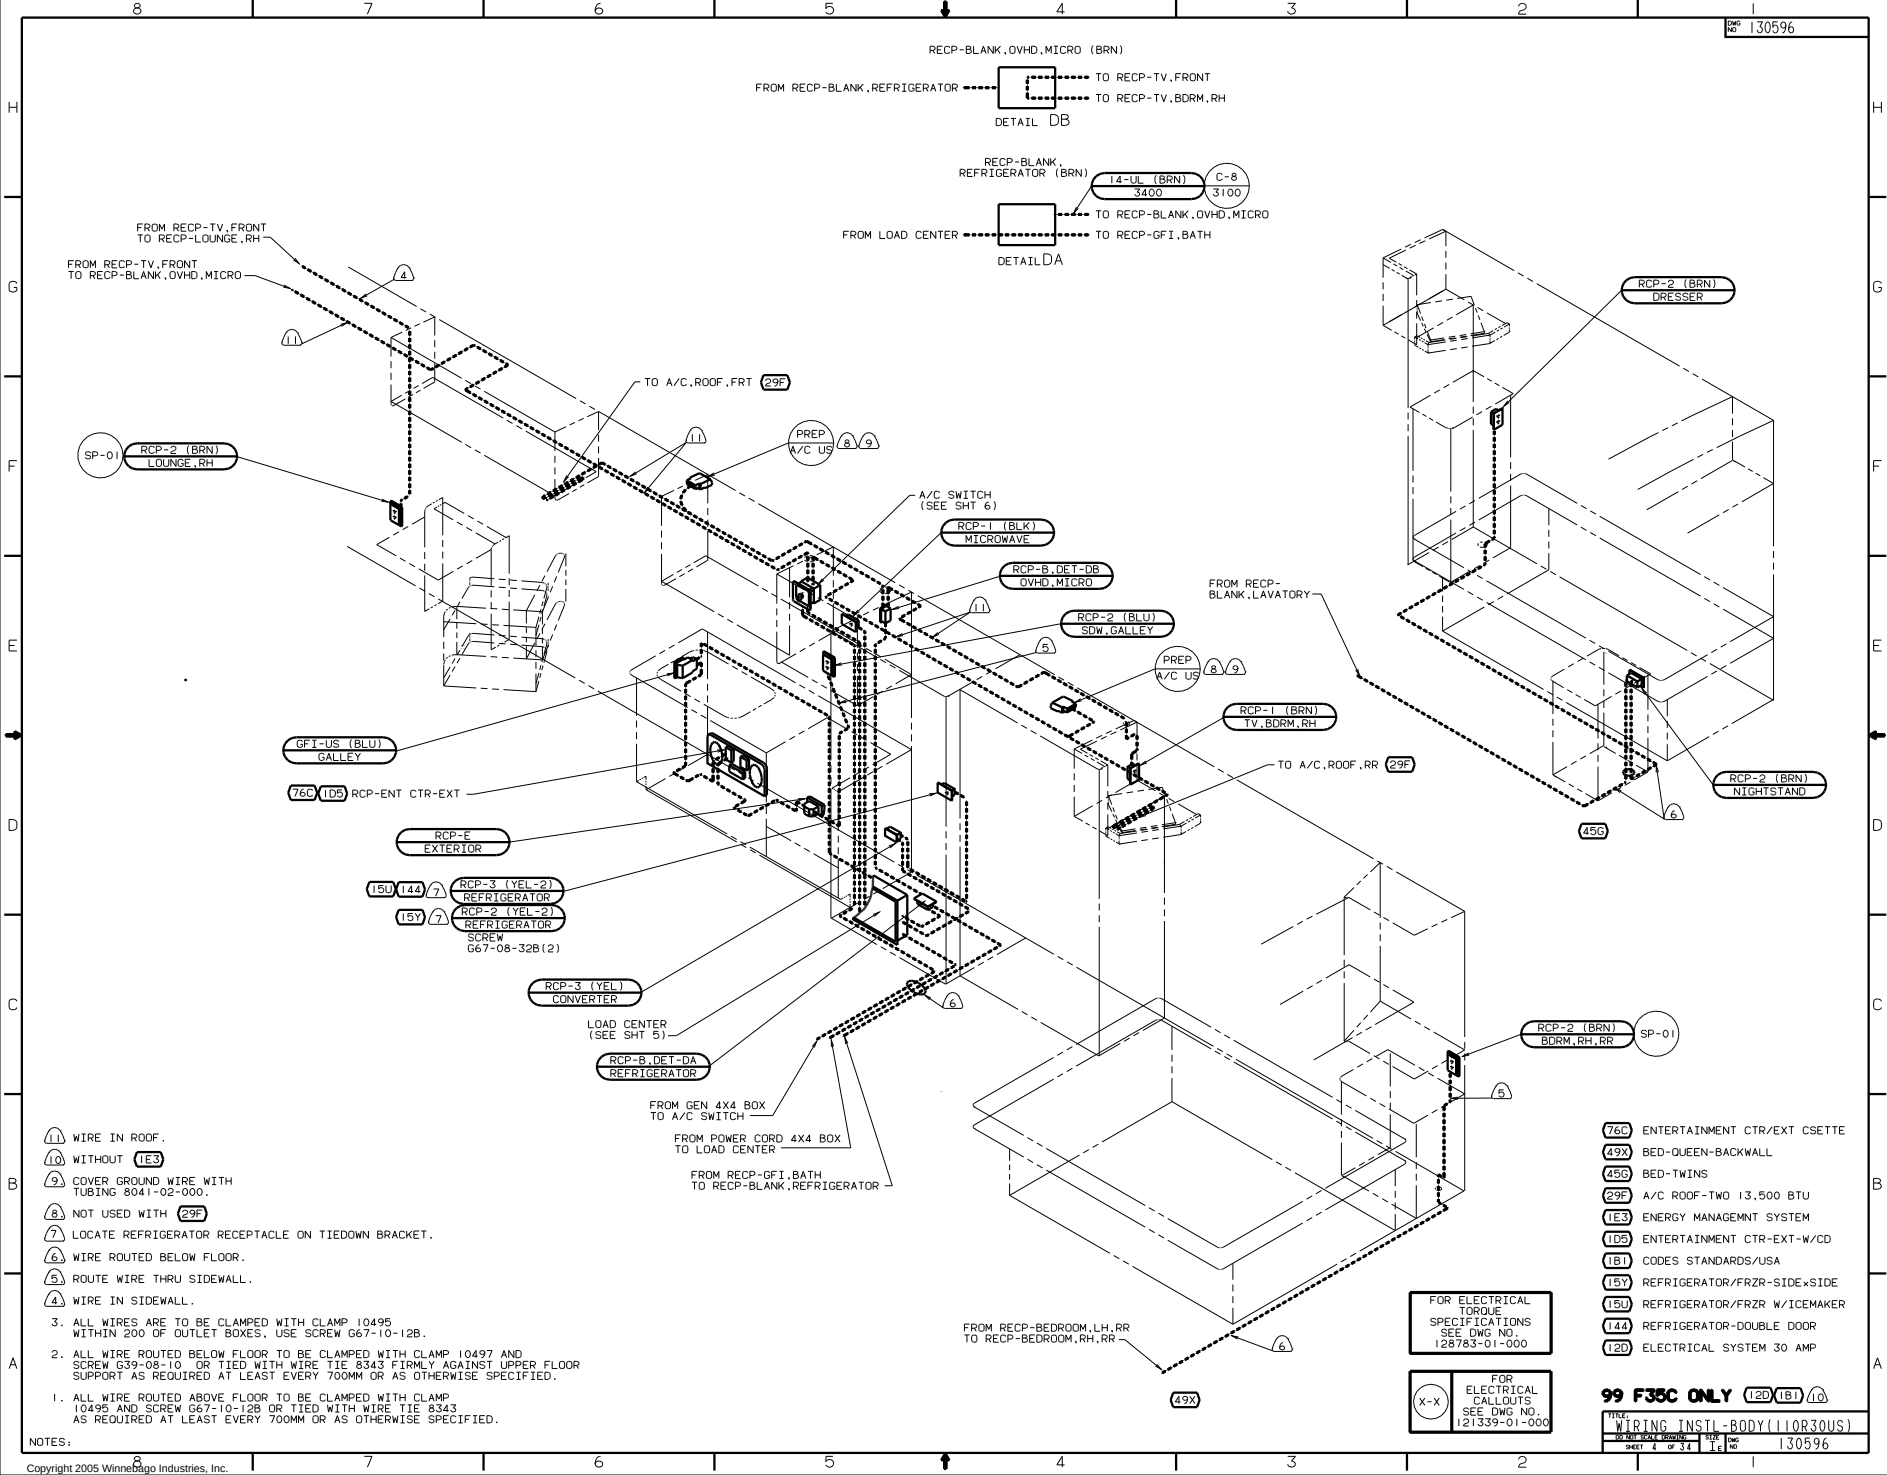

REC-1 (BLK) MICROWAVE

FROM REC-1 (BLK) MICROWAVE TO REC-TV, FRONT
TO REC-TV, BDRM, RH

DETAIL DB

REC-1 (BLK) MICROWAVE

14-UL (BRN) 3400
C-8 3100

FROM REC-1 (BLK) MICROWAVE TO REC-TV, FRONT
TO REC-TV, BDRM, RH

DETAIL DA

FROM REC-TV, FRONT
TO REC-LOUNGE, RH

FROM REC-TV, FRONT
TO REC-BLANK, OVHD, MICRO

TO A/C. ROOF, FRT 29F

PREP A/C US 8/9

A/C SWITCH (SEE SHT 6)

RCP-1 (BLK) MICROWAVE

RCP-2 (BLU) SDW. GALLEY

FROM REC-1 (BLK) MICROWAVE

PREP A/C US 8/9

RCP-1 (BRN) TV, BDRM, RH

TO A/C. ROOF, RR 29F

RCP-2 (BRN) DRESSER

RCP-2 (BRN) NIGHTSTAND

GFI-US (BLU) GALLEY

76C 105 RCP-ENT CTR-EXT

RCP-3 (YEL-2) REFRIGERATOR

150 144 7 RCP-2 (YEL-2) REFRIGERATOR

157 7 RCP-2 (YEL-2) REFRIGERATOR SCREW G67-08-32B (2)

RCP-3 (YEL) CONVERTER

LOAD CENTER (SEE SHT 5)

RCP-2 (BLU) TV, BDRM, RH

FROM GEN 4X4 BOX TO A/C SWITCH

FROM POWER CORD 4X4 BOX TO LOAD CENTER

FROM REC-1 (BLK) MICROWAVE TO REC-TV, FRONT

TO REC-TV, BDRM, RH

- 1. WIRE IN ROOF.
- 2. WITHOUT 1E3
- 3. COVER GROUND WIRE WITH TUBING 8041-02-000.
- 4. NOT USED WITH 29F
- 5. LOCATE REFRIGERATOR RECEPTACLE ON TIEDOWN BRACKET.
- 6. WIRE ROUTED BELOW FLOOR.
- 7. ROUTE WIRE THRU SIDEWALL.
- 8. WIRE IN SIDEWALL.

- 3. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10495 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
- 2. ALL WIRE ROUTED BELOW FLOOR TO BE CLAMPED WITH CLAMP 10497 AND SCREW G39-08-10 OR TIED WITH WIRE TIE 8343 FIRMLY AGAINST UPPER FLOOR SUPPORT AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.
- 1. ALL WIRE ROUTED ABOVE FLOOR TO BE CLAMPED WITH CLAMP 10495 AND SCREW G67-10-12B OR TIED WITH WIRE TIE 8343 AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.



NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128753-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 76C ENTERTAINMENT CTR/EXT CSETTE
- 49X BED-QUEEN-BACKWALL
- 45G BED-TWINS
- 29F A/C ROOF-TWO 13,500 BTU
- 1E3 ENERGY MANAGEMNT SYSTEM
- 105 ENTERTAINMENT CTR-EXT-W/CD
- 1B1 CODES STANDARDS/USA
- 157 REFRIGERATOR/FRZR-SIDE*SIDE
- 150 REFRIGERATOR/FRZR W/ICEMAKER
- 144 REFRIGERATOR-DOUBLE DOOR
- 120 ELECTRICAL SYSTEM 30 AMP

99 F35C ONLY 120 1B1 10
WIRING INSTL-BODY (110R30US)
SHEET 4 OF 34 1E NO 130596

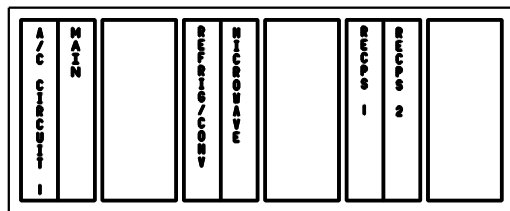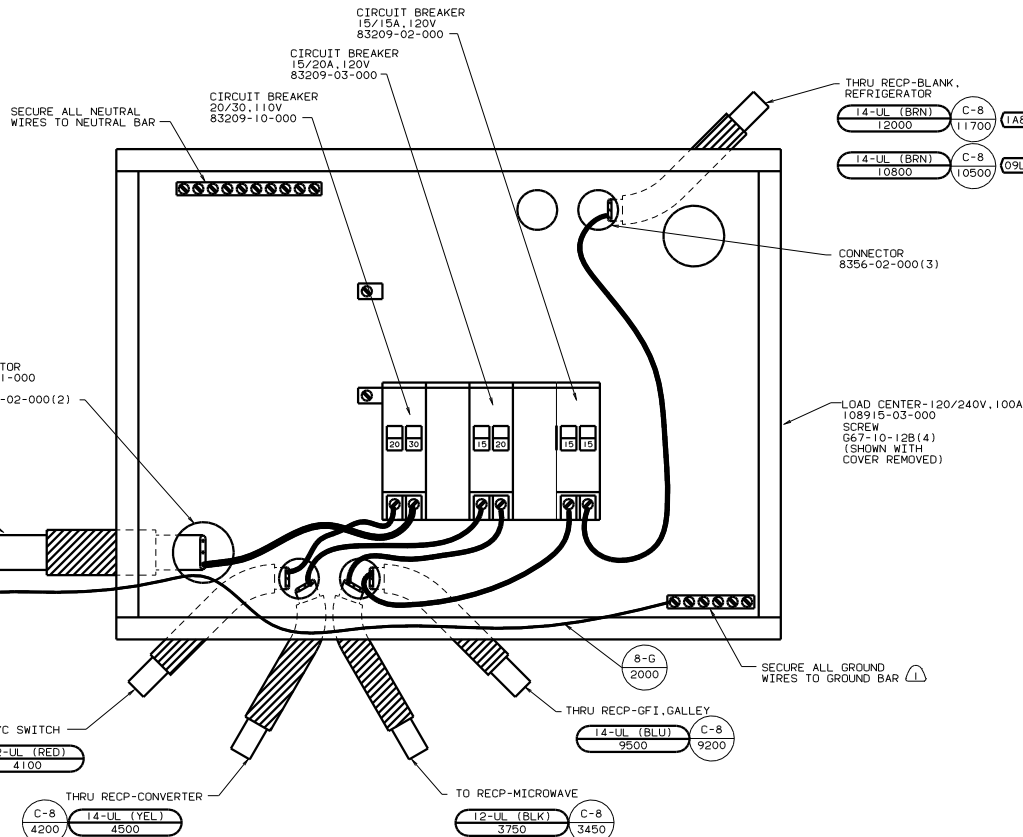

INSTALL LABEL ON FRONT PANEL BELOW BREAKERS BETWEEN MOUNTING HOLES

LABEL 95721-25-000

- NOTES:
- ② WITHOUT 1E3
 - ① ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.



- 1E3 ENERGY MANEGMNT SYSTM
- 1B1 CODES STANDARDS/USA
- 1A8 SLIDEOUT ROOM FRONT LEFT W/O
- 12D ELECTRICAL SYSTEM 30 AMP
- 09L SLIDEOUT ROOM-FRONT LEFT

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

99 F35C ONLY ② 12D 1B1

TITLE		DRAWING NO.	
WIRING INSTL-BODY(30 LC US)		130596	
SHEET 5 OF 34		1E NO	

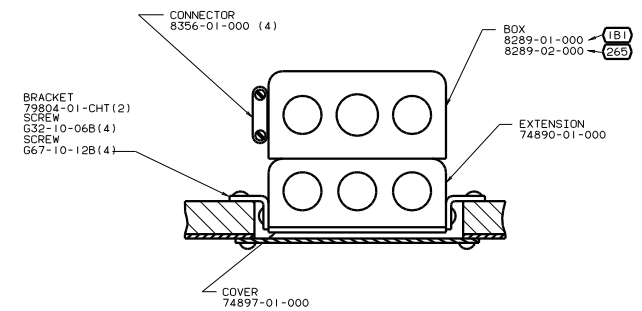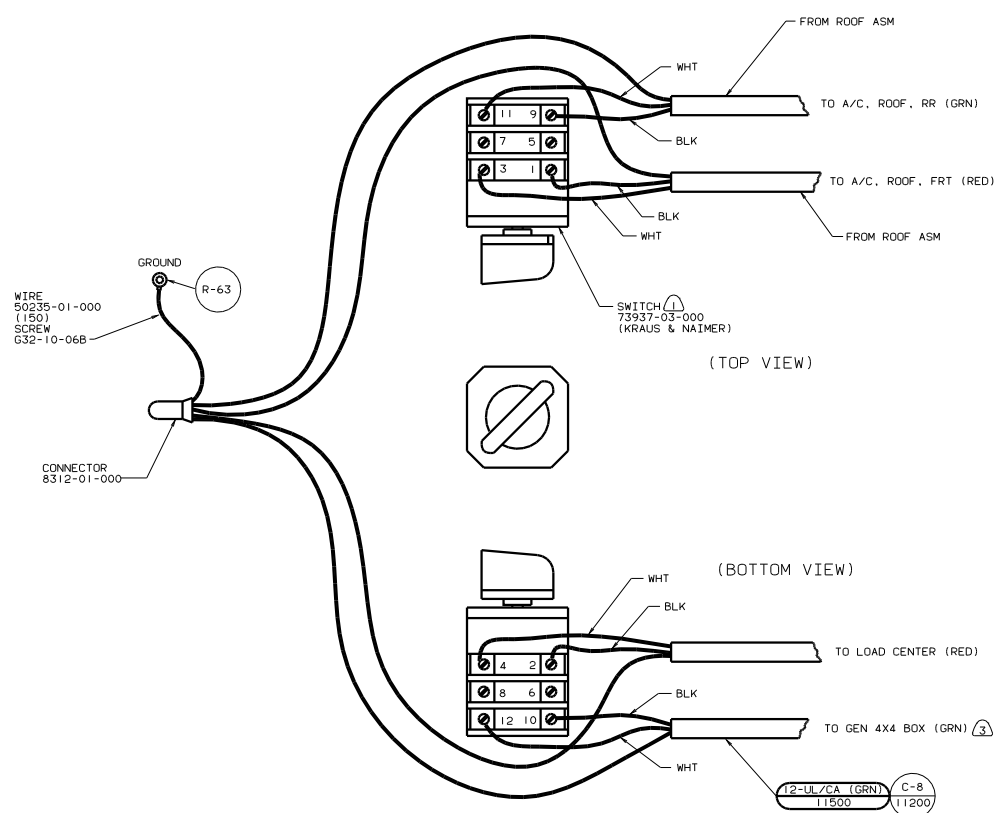

TOP VIEW OF BOX

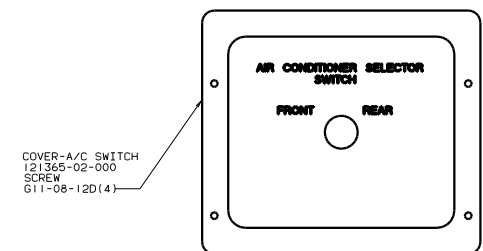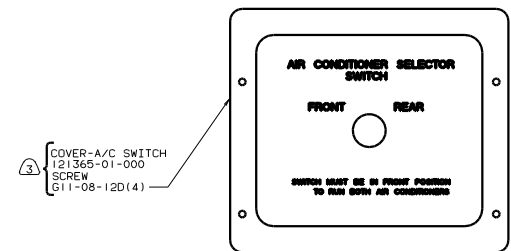

- NOTES:
- ④ WITHOUT 1E3
 - ③ USE WITH 5000 WATT GENERATOR OR LARGER.
 - 2. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 - ① FASTEN SWITCH TO COVER 74897-01-000 BEFORE FASTENING COVER TO BOX.

- 265 CODES/STANDARDS-CSA/CMVSS
- 1E3 ENERGY MANAGEMNT SYSTEM
- 1B1 CODES STANDARDS/USA
- 120 ELECTRICAL SYSTEM 30 AMP

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


99 F35C ONLY 120 1B1 265 ④


WIRING INSTL-BODY(A/C SWITCH)


SHEET 5 OF 34

130596

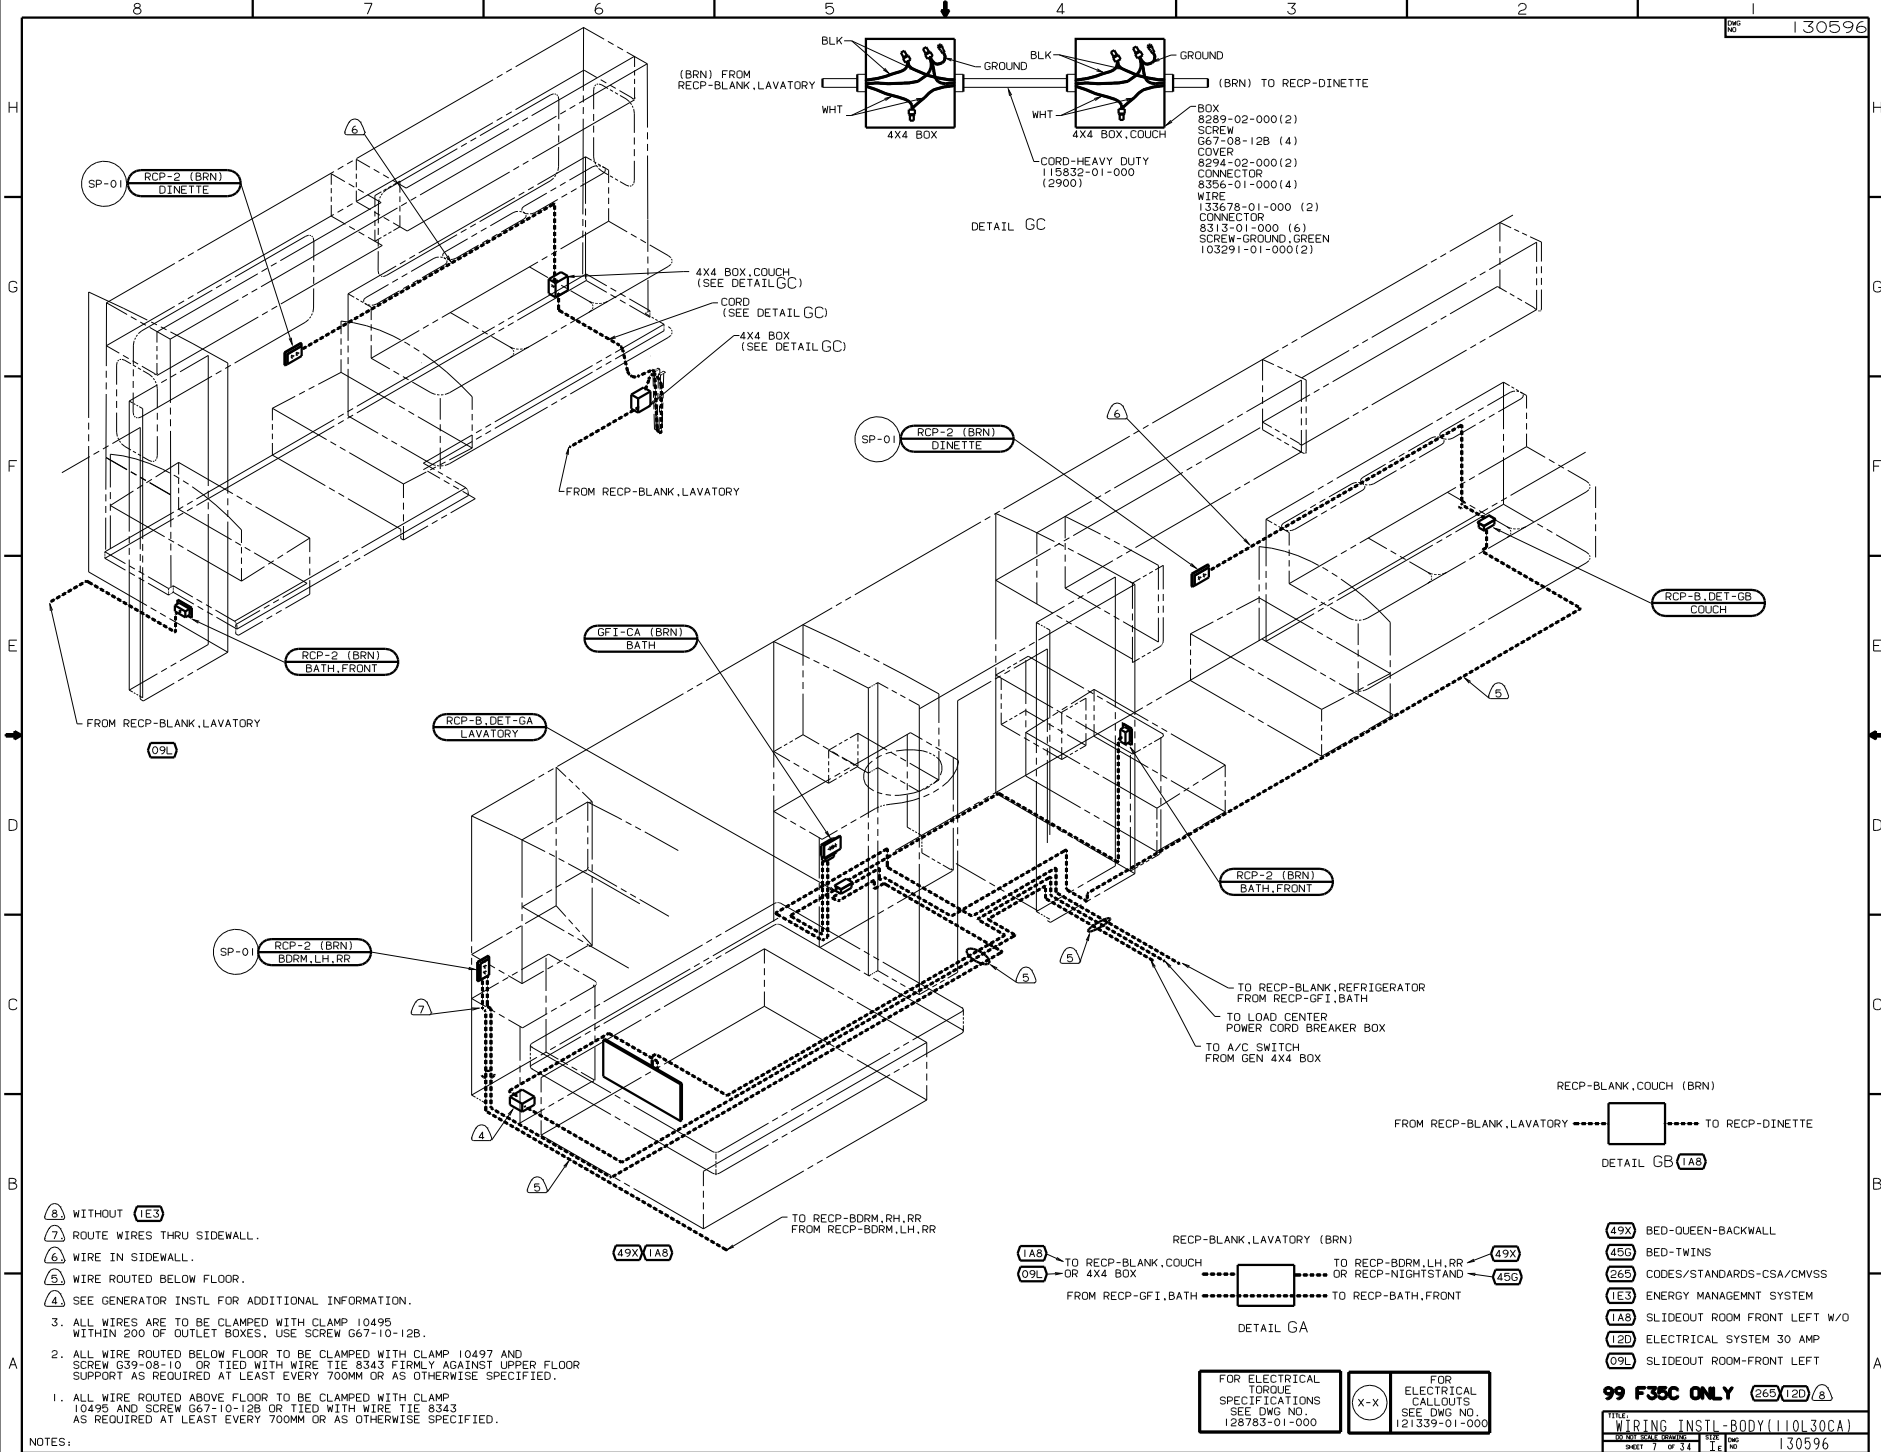

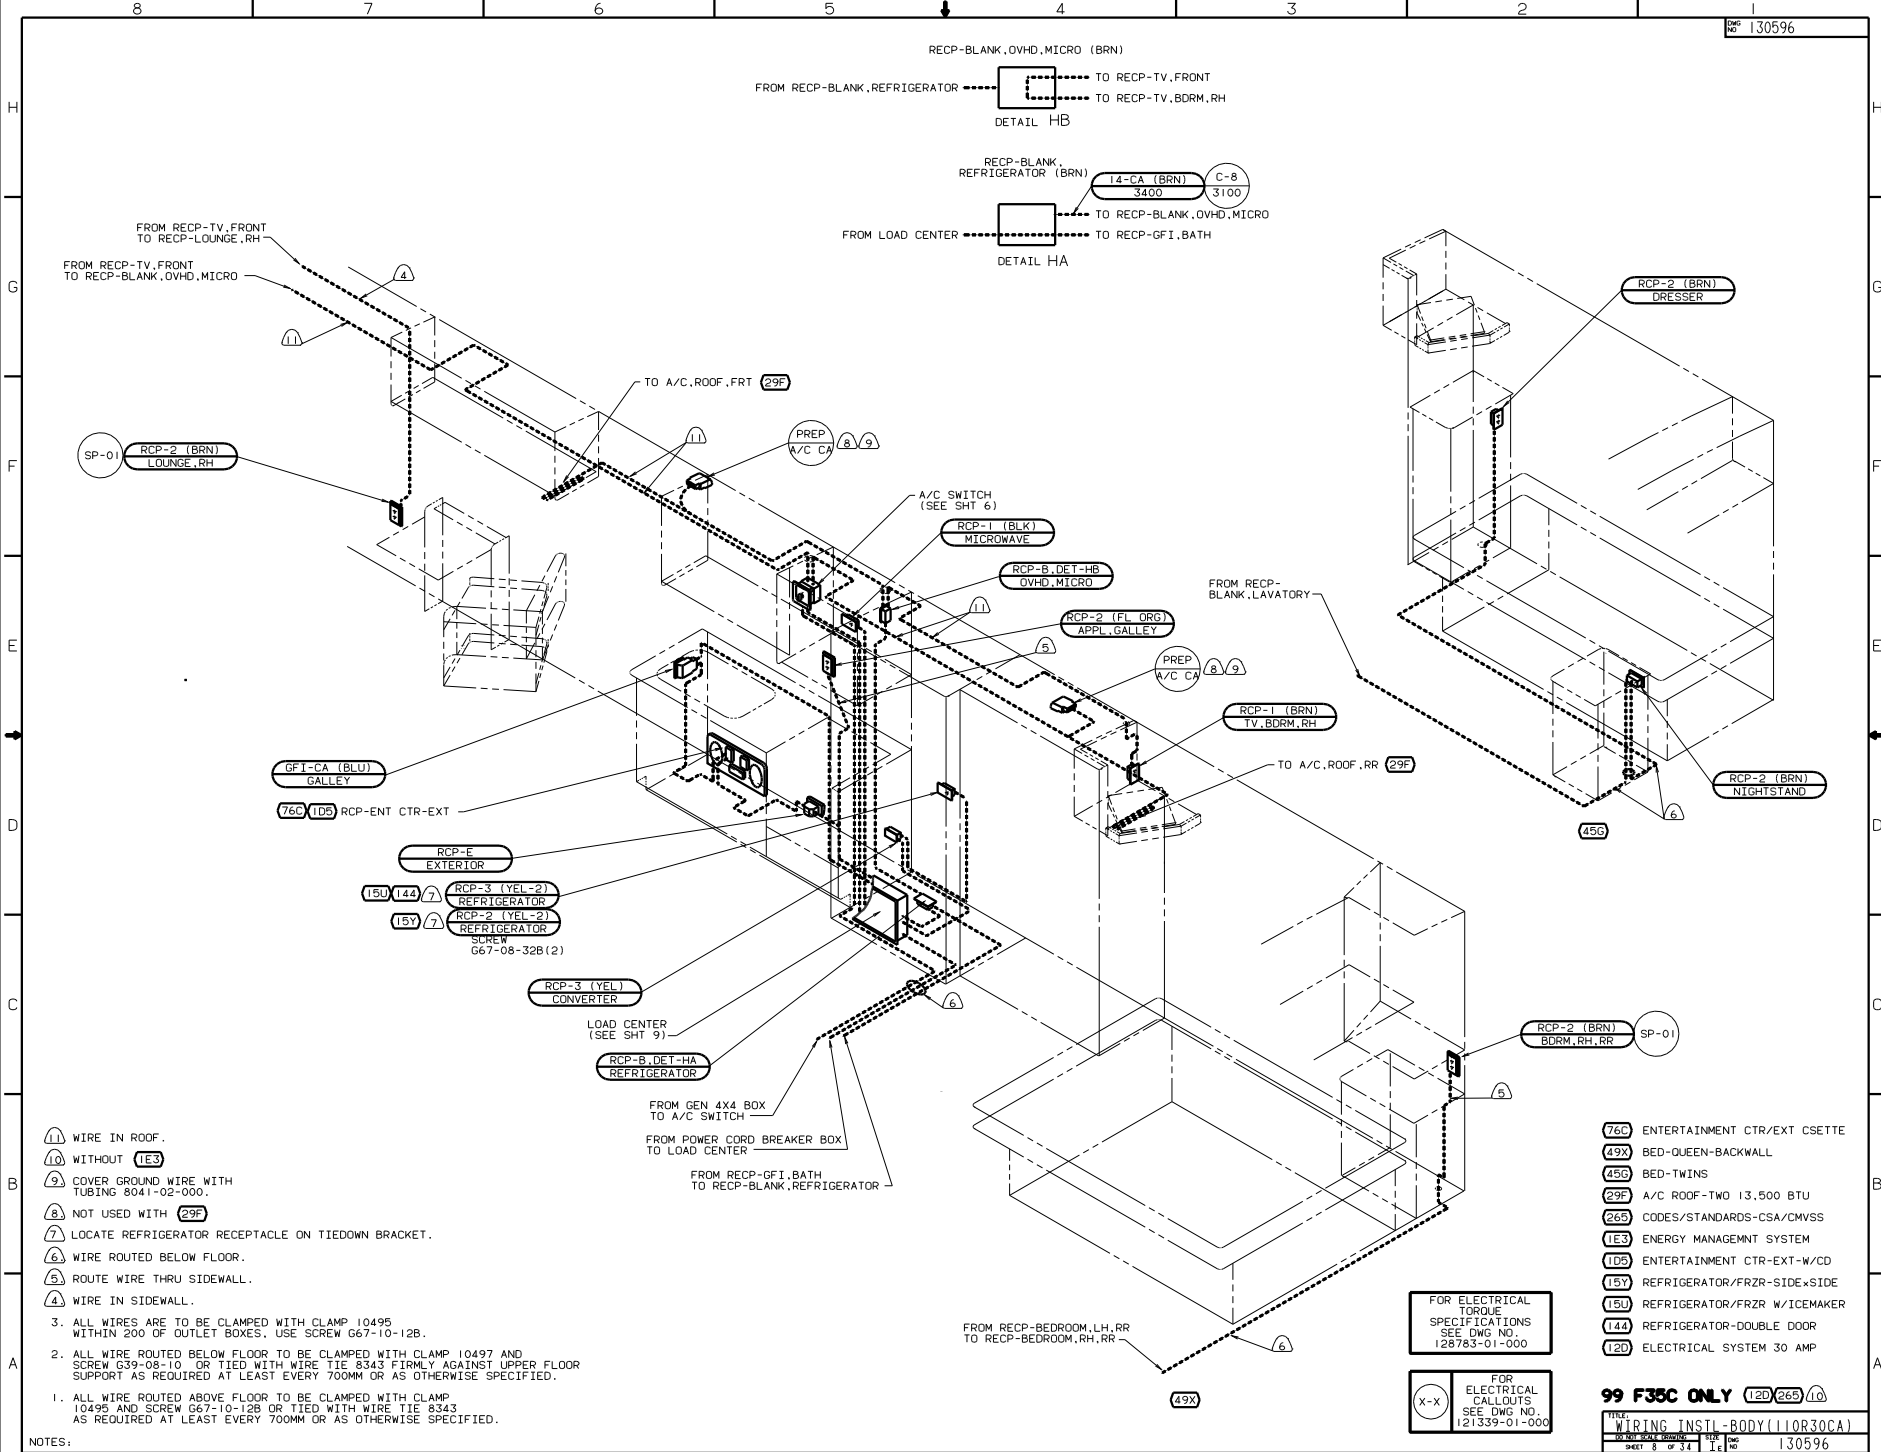

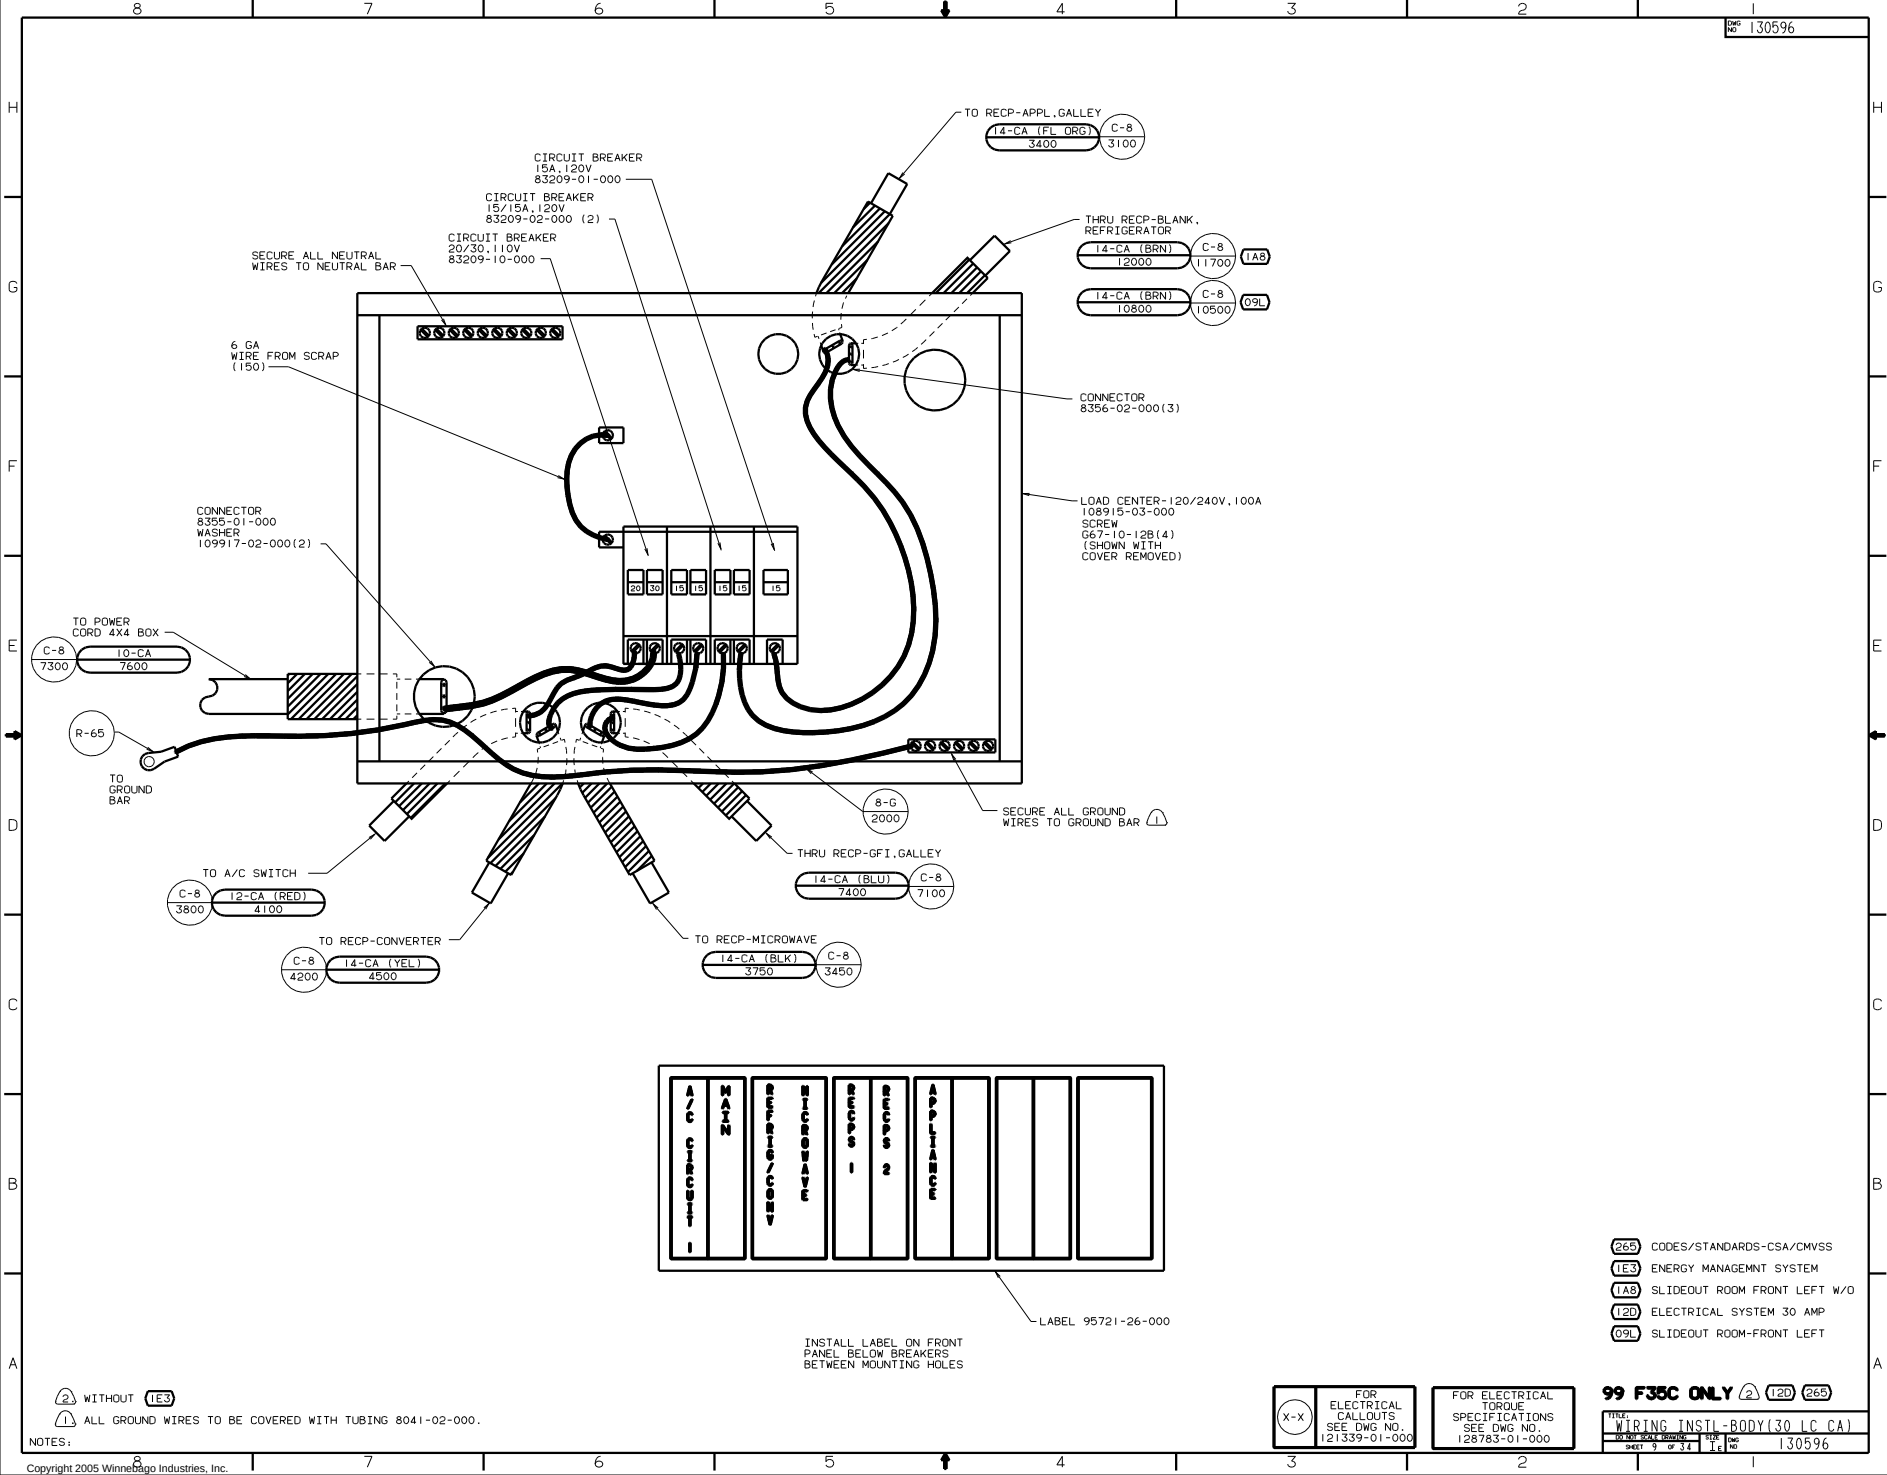


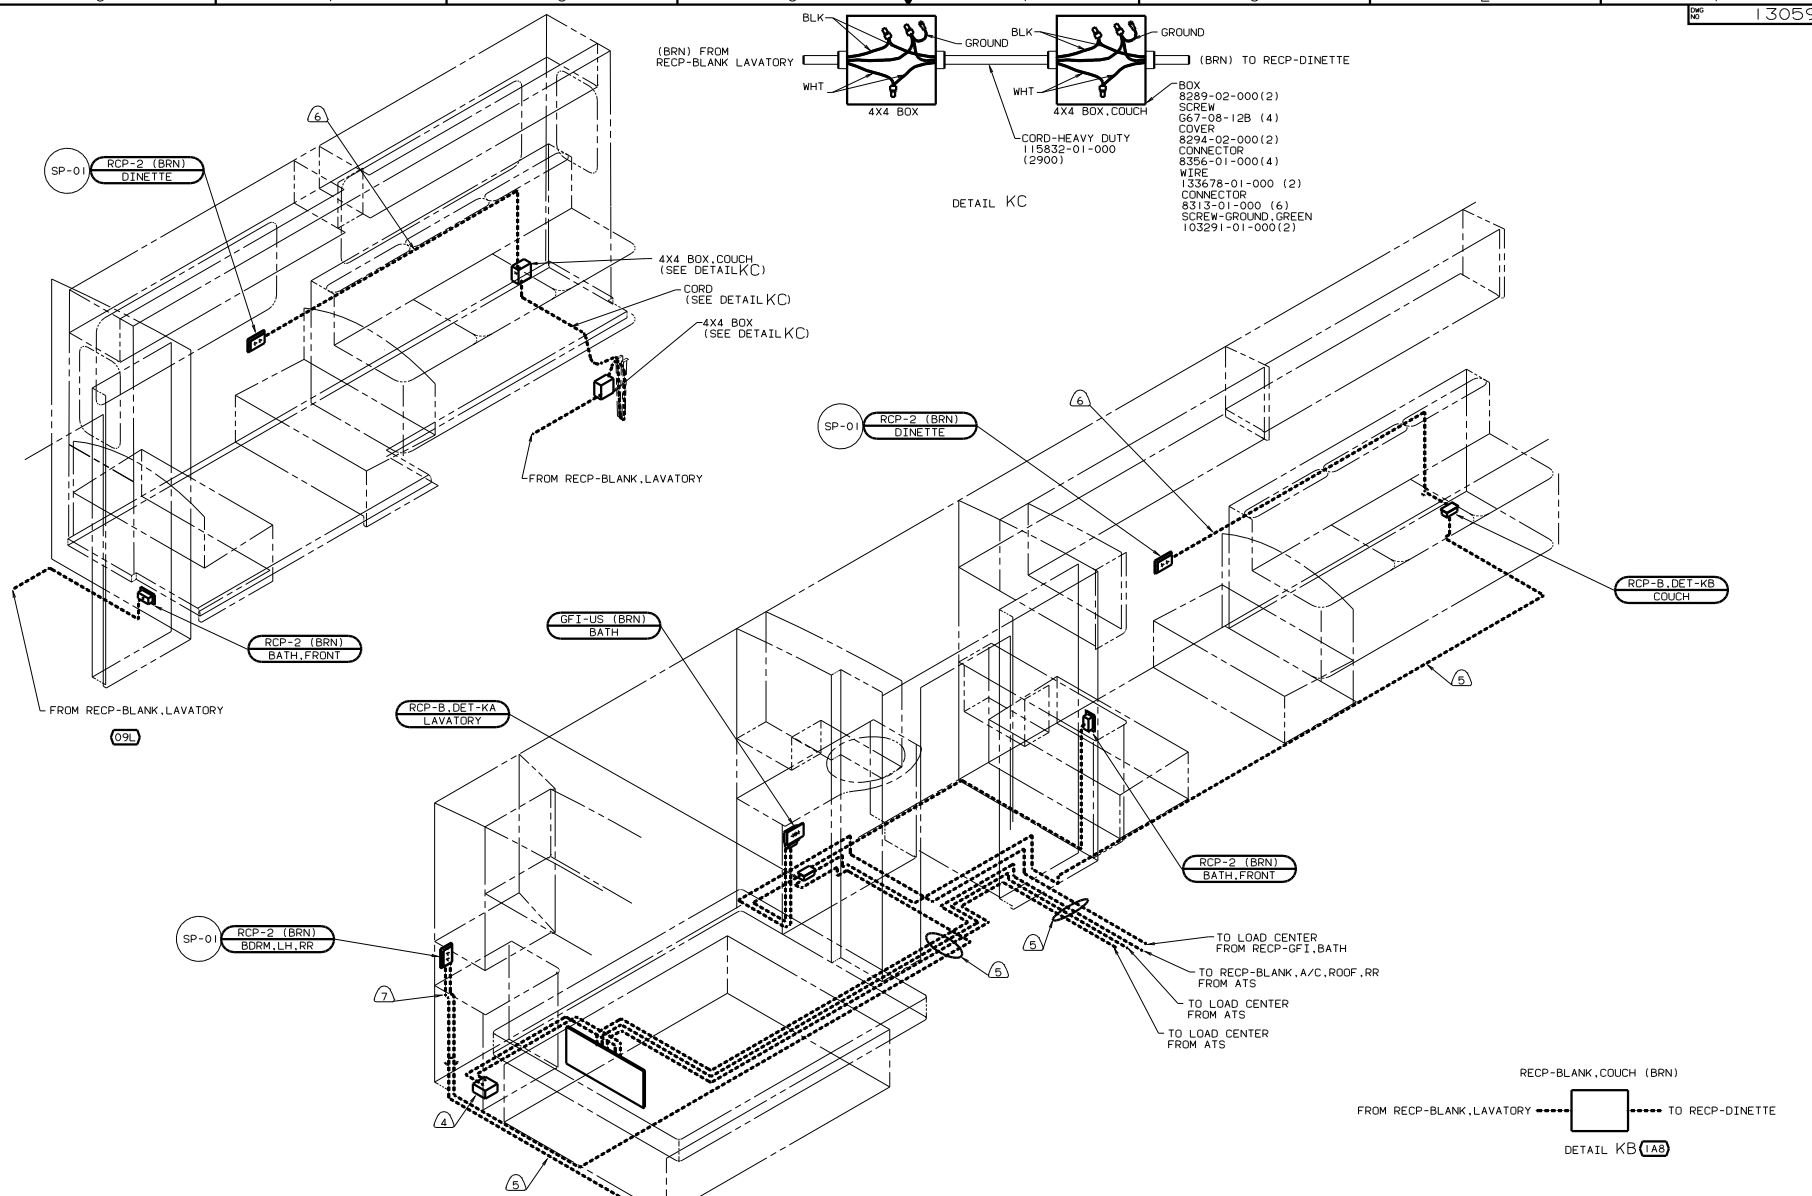


DETAIL KC

- BOX 8289-02-000(2)
- SCREW 667-08-12B (4)
- COVER 8294-02-000(2)
- CONNECTOR 8356-01-000(4)
- WIRE 133678-01-000 (2)
- CONNECTOR 8313-01-000 (6)
- SCREW-GROUND, GREEN 103291-01-000(2)

- TO LOAD CENTER FROM RECP-GFI, BATH
- TO RECP-BLANK, A/C, ROOF, RR FROM ATS
- TO LOAD CENTER FROM ATS
- TO LOAD CENTER FROM ATS

DETAIL KA



- ROUTE WIRES THRU SIDEWALL.
 - WIRE IN SIDEWALL.
 - WIRE ROUTED BELOW FLOOR.
 - SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
3. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10495 WITHIN 200 OF OUTLET BOXES. USE SCREW 667-10-12B.
2. ALL WIRE ROUTED BELOW FLOOR TO BE CLAMPED WITH CLAMP 10497 AND SCREW 639-08-10 OR TIED WITH WIRE TIE 8343 FIRMLY AGAINST UPPER FLOOR SUPPORT AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.
1. ALL WIRE ROUTED ABOVE FLOOR TO BE CLAMPED WITH CLAMP 10495 AND SCREW 667-10-12B OR TIED WITH WIRE TIE 8343 AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.




NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- (49X) BED-QUEEN-BACKWALL
- (45G) BED-TWINS
- (12D) ELECTRICAL SYSTEM 30 AMP
- (1E3) ENERGY MANAGEMNT SYSTEM
- (1B1) CODES STANDARDS/USA
- (1A8) SLIDEOUT ROOM FRONT LEFT W/O
- (09L) SLIDEOUT ROOM-FRONT LEFT

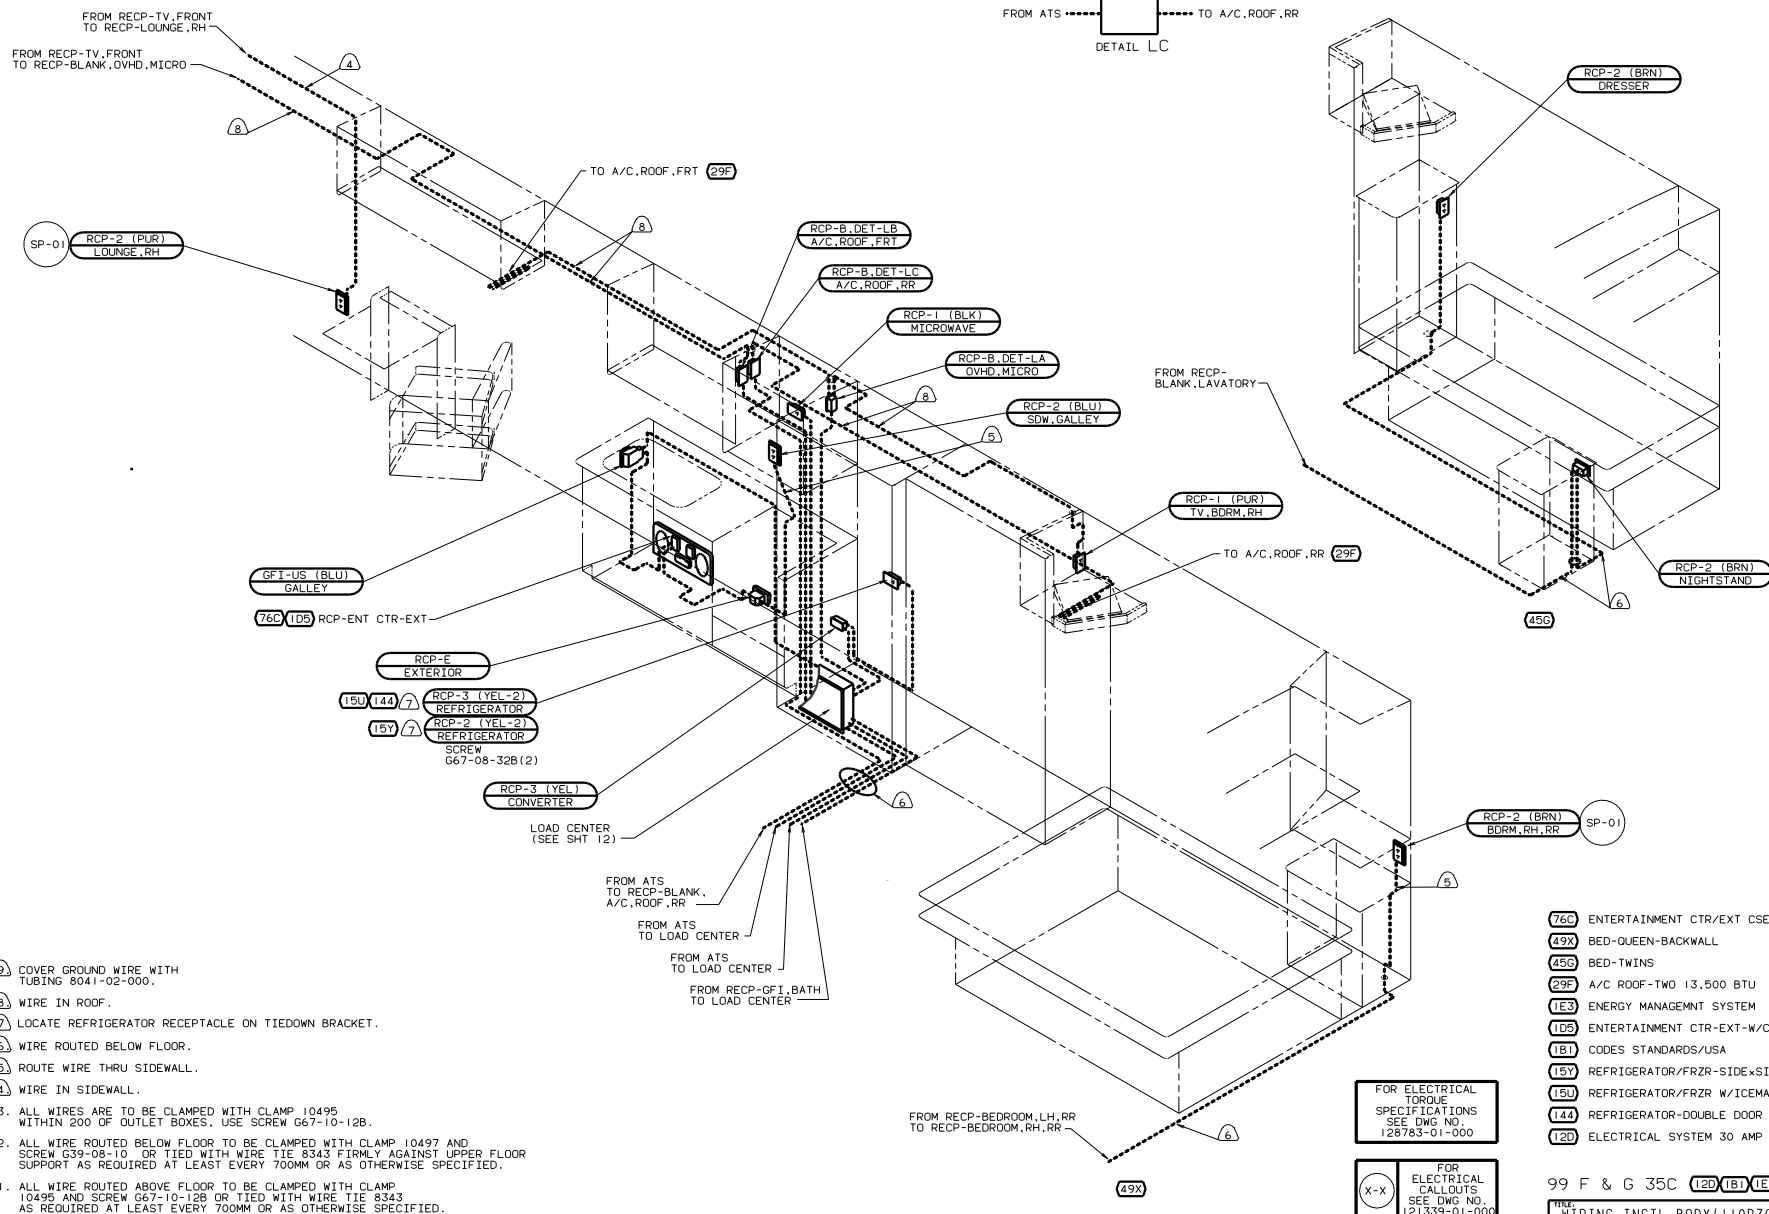

- | | |
|------|------------------------------|
| 78C | ENTERTAINMENT CTR/EXT CSETTE |
| 49X | BED-QUEEN-BACKWALL |
| 456 | BED-TWINS |
| 29F | A/C ROOF-TWO 13,500 BTU |
| 1E3 | ENERGY MANAGEMENT SYSTEM |
| 105S | ENTERTAINMENT CTR-EXT-W/CD |
| 1B1 | CODES STANDARDS/USA |
| 15Y | REFRIGERATOR/FRZR-SIDE×SIDE |
| 15U | REFRIGERATOR/FRZR W/ICEMAKER |
| 144 | REFRIGERATOR-DOUBLE DOOR |
| 120 | ELECTRICAL SYSTEM 30 AMP |

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000




FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-00

99 F & G 35C 12D1B11E3

TITLE: HIDING INCTL BODY/LLORZOUS

WIRING INSTL-BODY (TUBS)		
DO NOT SCALE DRAWING	SIZE	CWG
DATE: 1-1-74	T	130596

9401	11	01	34	1E	NO	150570
------	----	----	----	----	----	--------

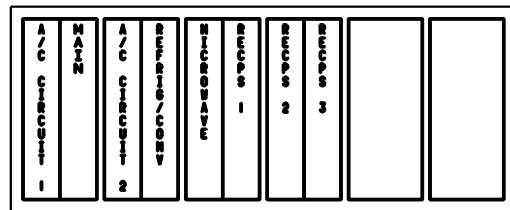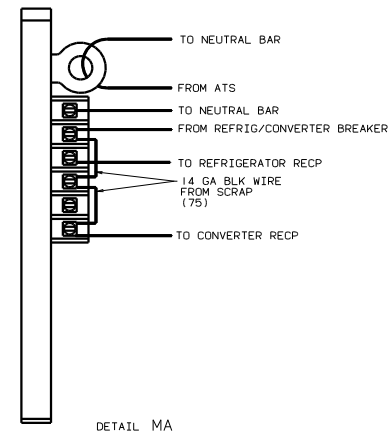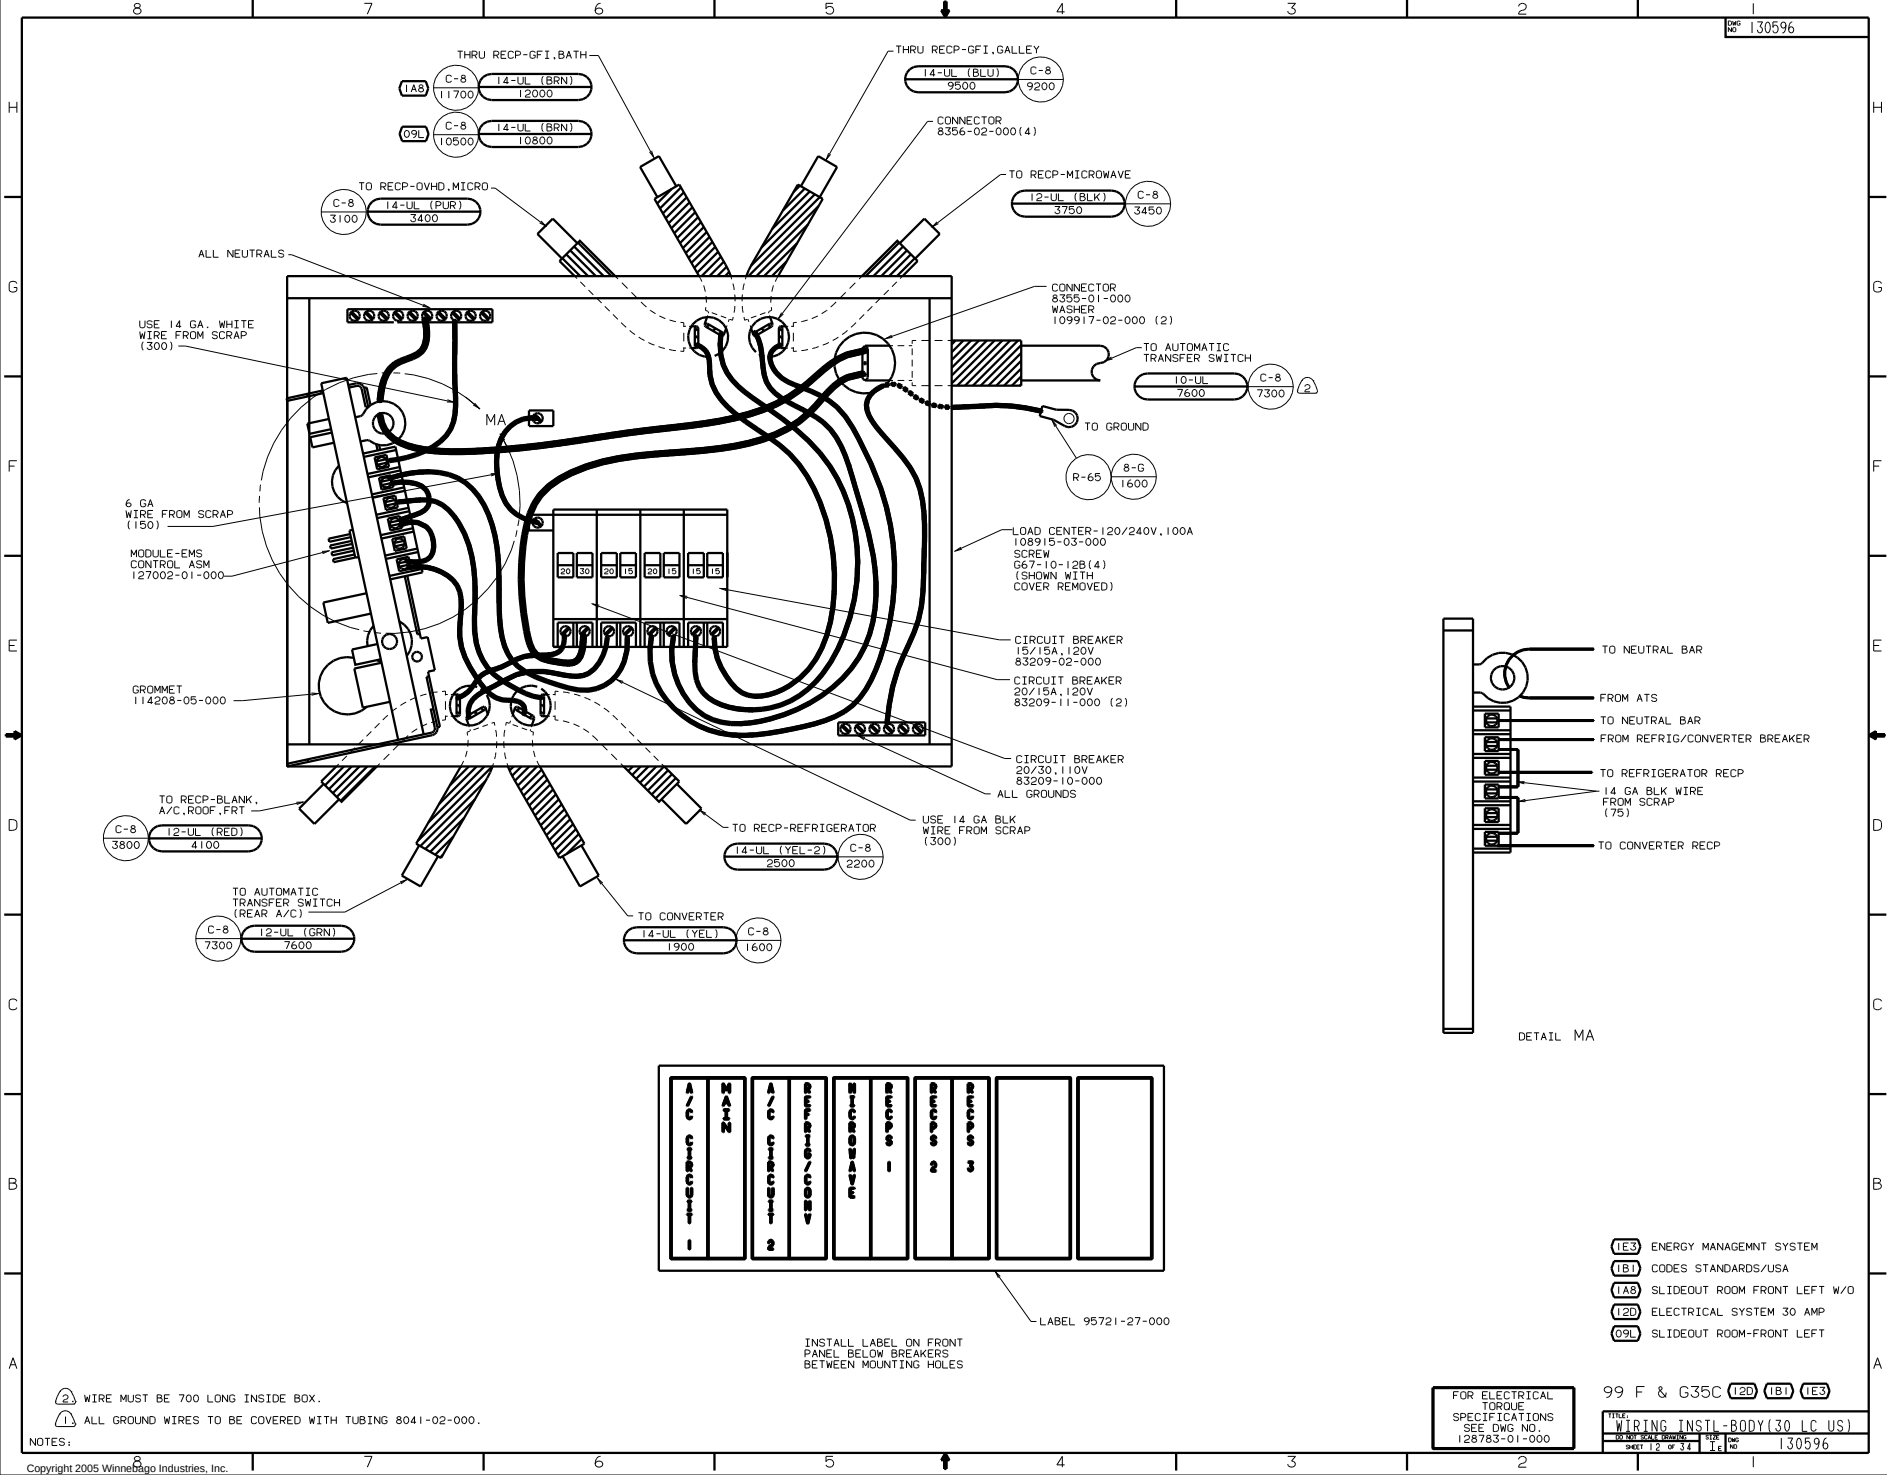

INSTALL LABEL ON FRONT PANEL BELOW BREAKERS BETWEEN MOUNTING HOLES

LABEL 95721-27-000





- NOTES:
- (2) WIRE MUST BE 700 LONG INSIDE BOX.
 - (1) ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

- (1E3) ENERGY MANEGMTN SYSTEM
- (1B1) CODES STANDARDS/USA
- (1A8) SLIDEOUT ROOM FRONT LEFT W/O
- (12D) ELECTRICAL SYSTEM 30 AMP
- (09L) SLIDEOUT ROOM-FRONT LEFT

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

99 F & G35C (12D) (1B1) (1E3)


TITLE	
WIRING INSTL-BODY(30 LC US)	
NO. 12 OF 34	1E3
130596	

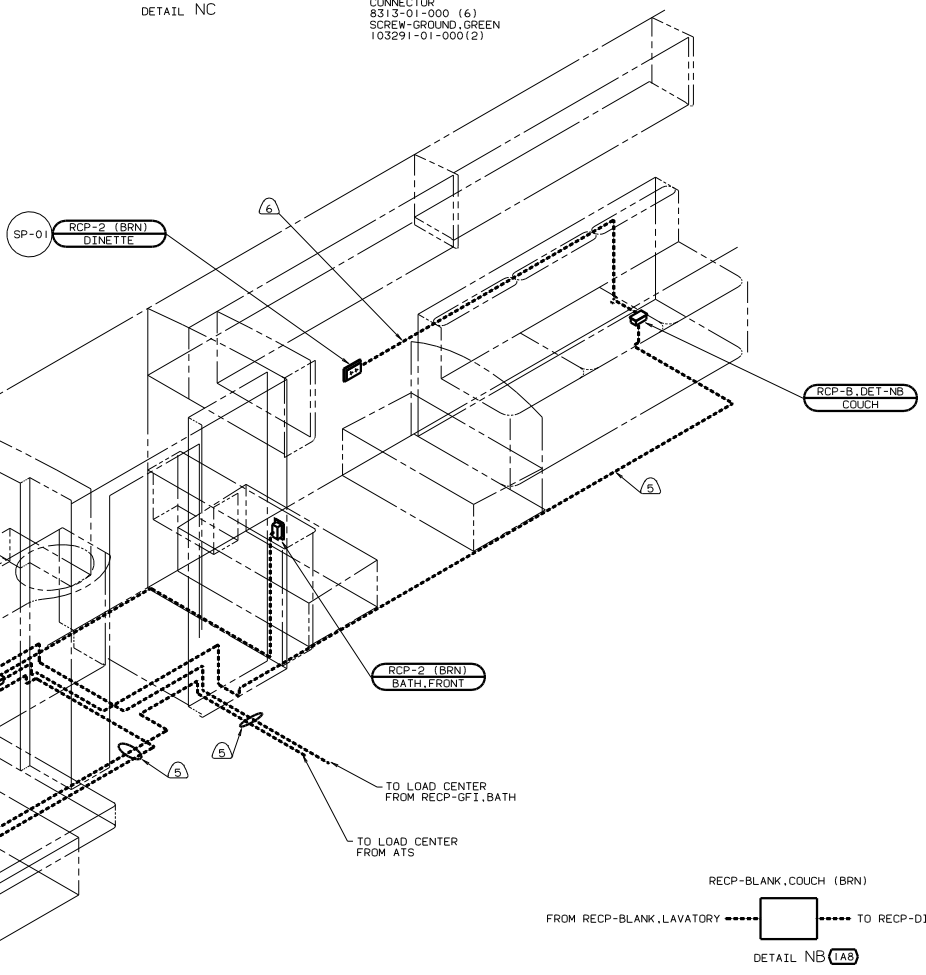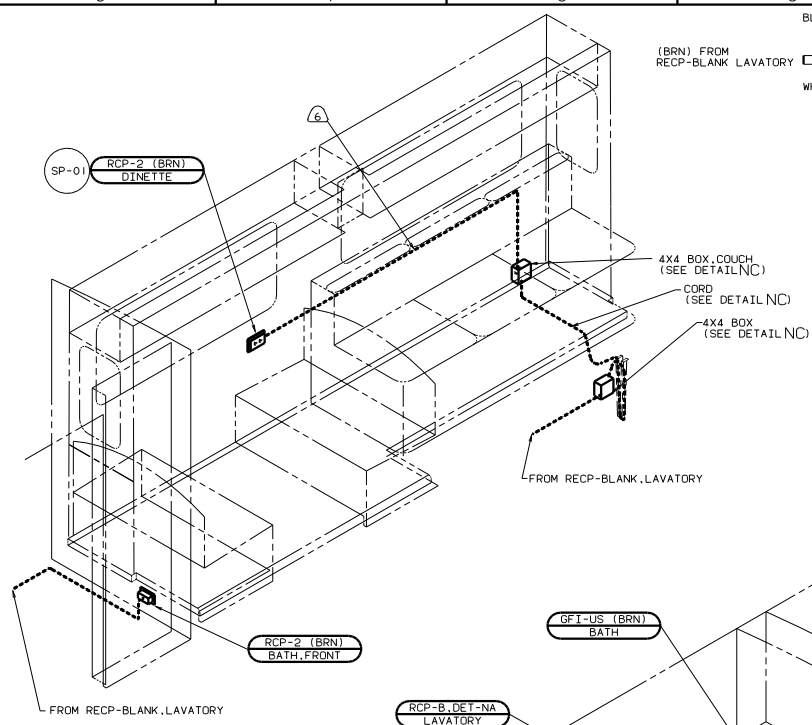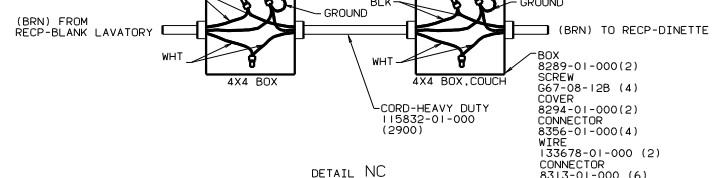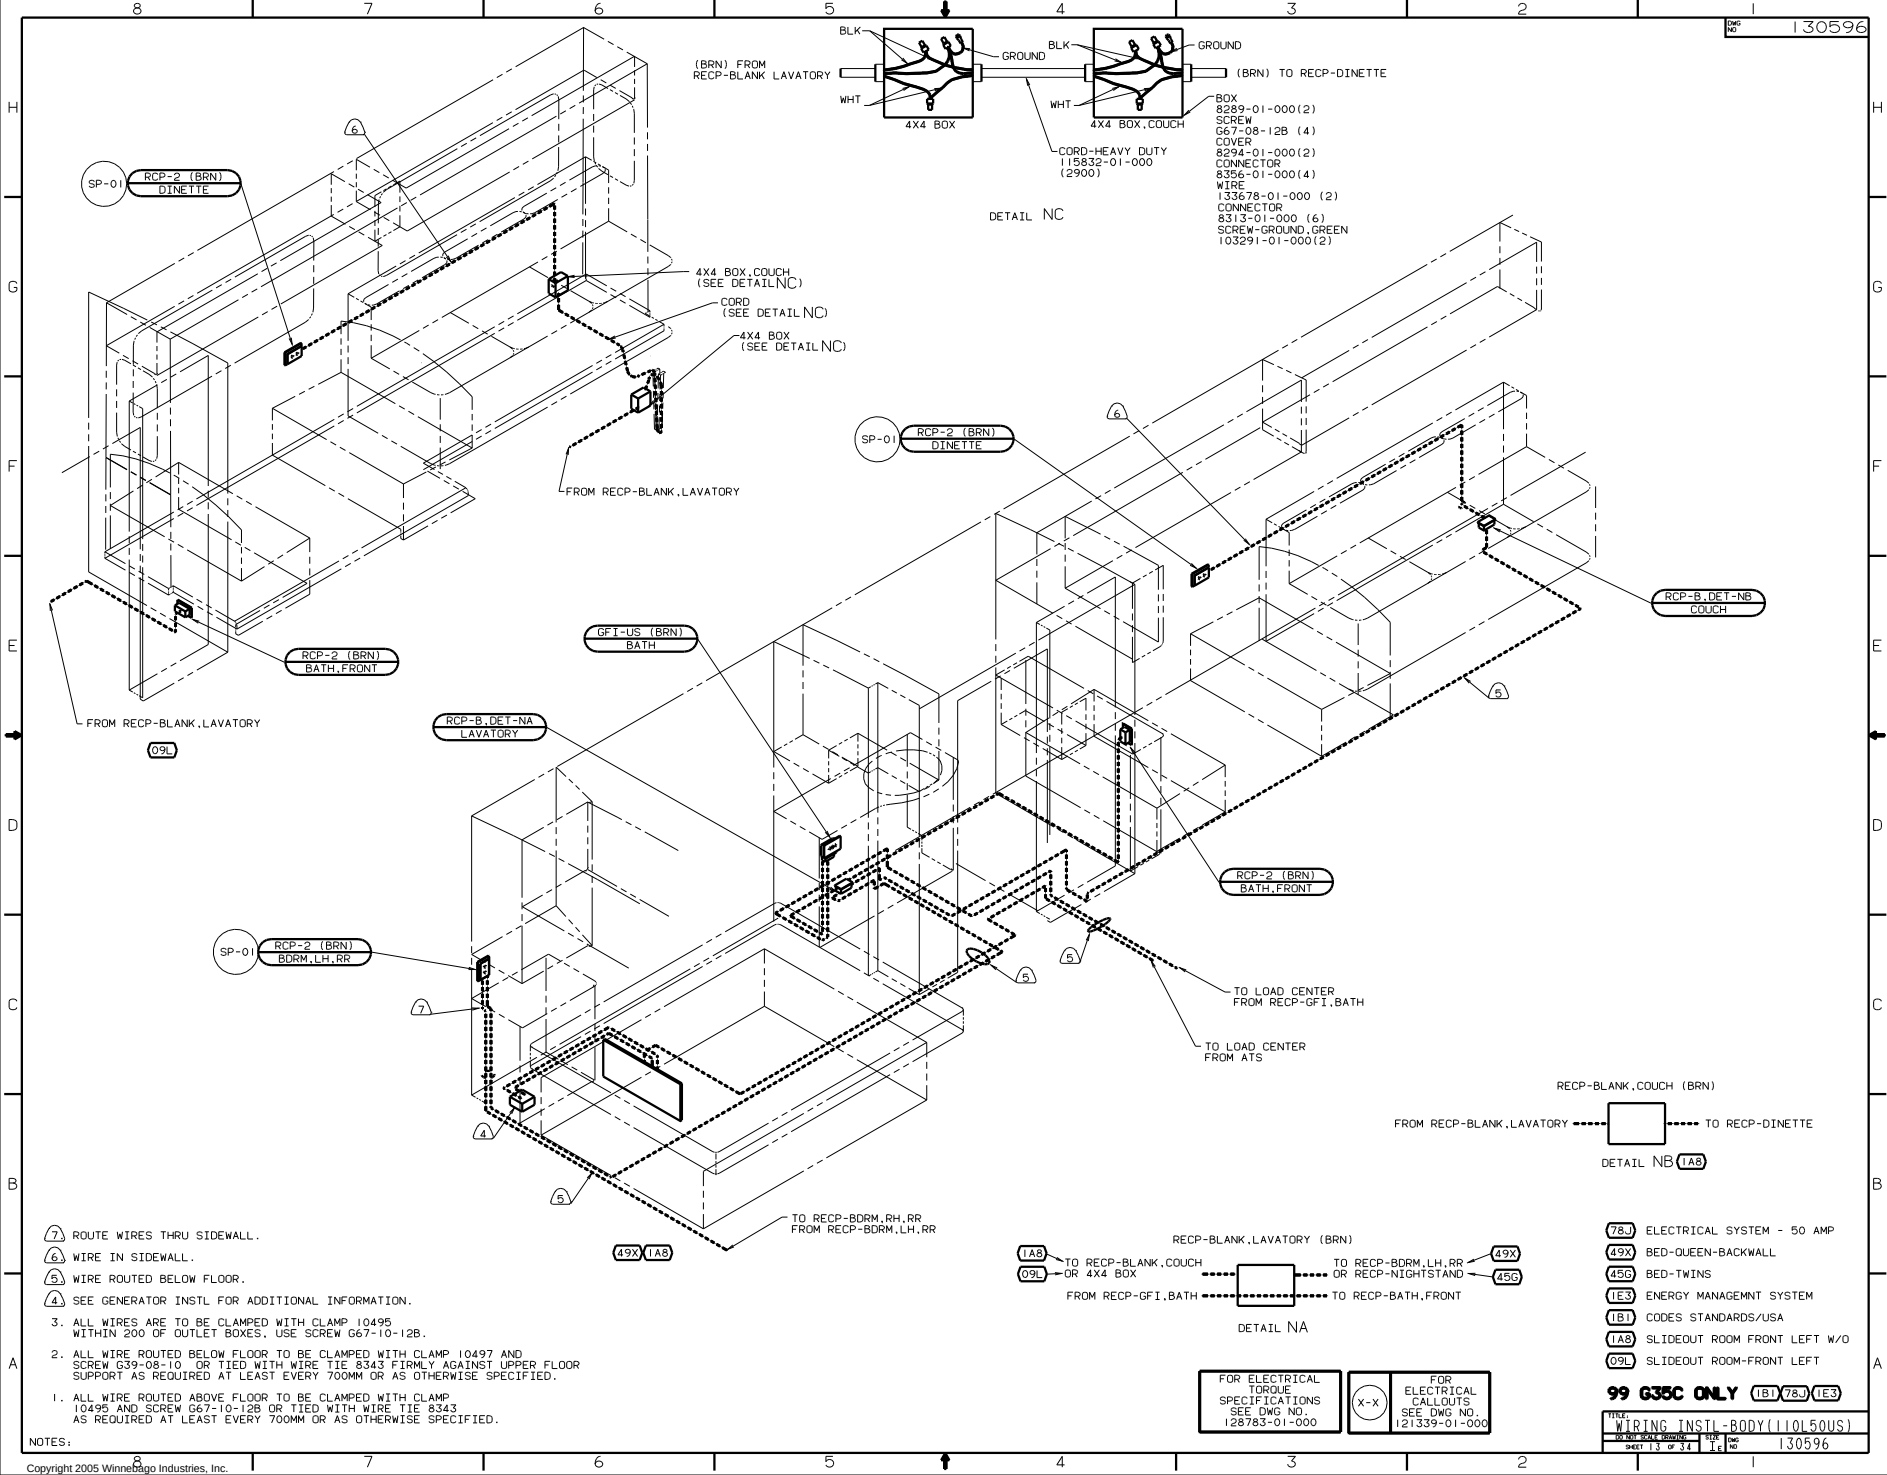

- 7 ROUTE WIRES THRU SIDEWALL.
- 6 WIRE IN SIDEWALL.
- 5 WIRE ROUTED BELOW FLOOR.
- 4 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.

3. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10495 WITHIN 200 OF OUTLET BOXES. USE SCREW 667-10-12B.
2. ALL WIRE ROUTED BELOW FLOOR TO BE CLAMPED WITH CLAMP 10497 AND SCREW G39-08-10 OR TIED WITH WIRE TIE 8343 FIRMLY AGAINST UPPER FLOOR SUPPORT AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.
1. ALL WIRE ROUTED ABOVE FLOOR TO BE CLAMPED WITH CLAMP 10495 AND SCREW 667-10-12B OR TIED WITH WIRE TIE 8343 AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.

NOTES:







FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWS NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWS NO. 121339-01-000

- 78J ELECTRICAL SYSTEM - 50 AMP
- 49X BED-QUEEN-BACKWALL
- 45G BED-TWINS
- 1E3 ENERGY MANEGMNT SYSTEM
- 1B1 CODES STANDARDS/USA
- 1A8 SLIDEOUT ROOM FRONT LEFT W/O
- 09L SLIDEOUT ROOM-FRONT LEFT

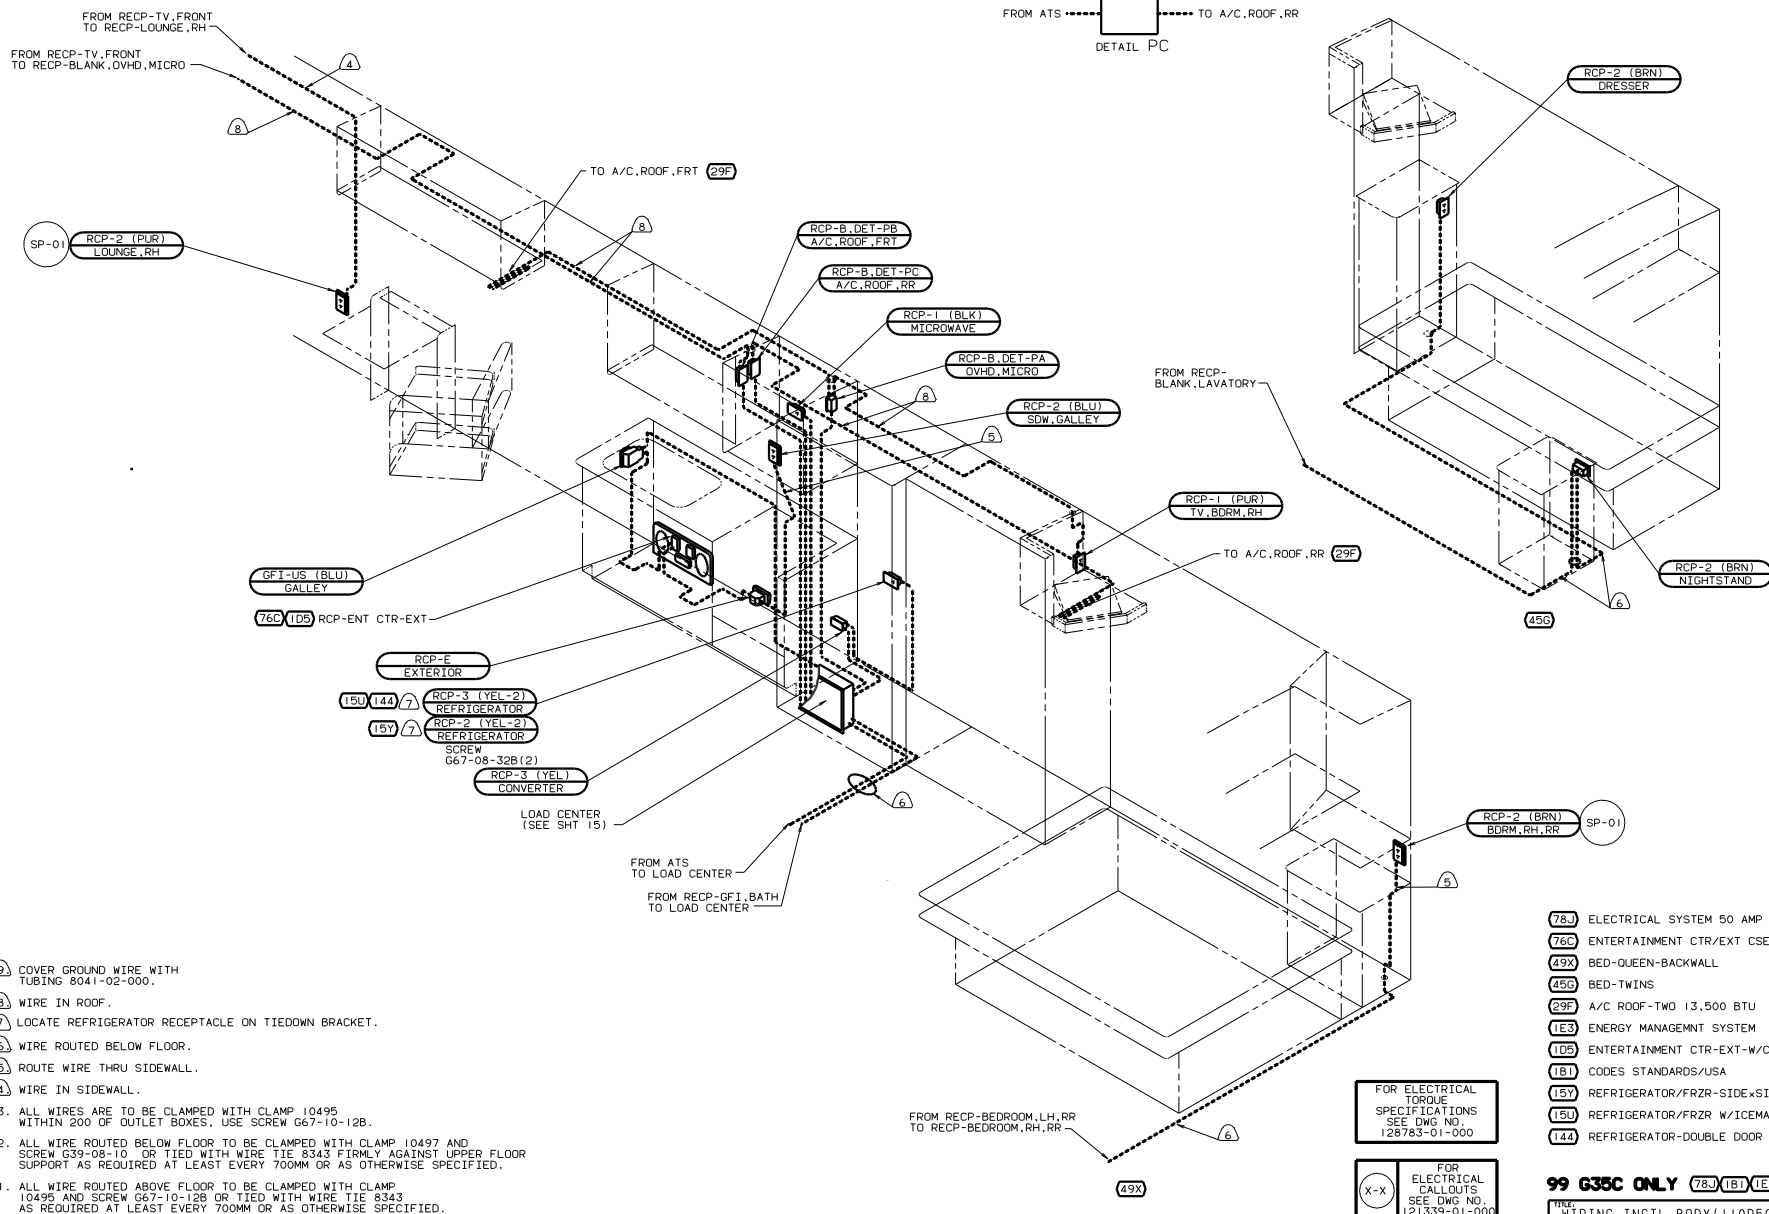

- | | |
|-----|------------------------------|
| 78A | ELECTRICAL SYSTEM 50 AMP |
| 76C | ENTERTAINMENT CTR/EXT CSETTE |
| 49X | BED-QUEEN-BACKWALL |
| 45D | BED-TWINS |
| 29C | A/C ROOF-TWO 13,500 BTU |
| 1E3 | ENERGY MANAGEMENr SYSTEM |
| 106 | ENTERTAINMENT CTR-EXT-W/CD |
| 181 | CODES STANDARDS/USA |
| 15Y | REFRIGERATOR/FRZR-SIDExSIDE |
| 15U | REFRIGERATOR/FRZR W/ICEMAKER |
| 144 | REFRIGERATOR-DOUBLE DOOR |


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
-----	---

99 G35C ONLY (78J)(1B1)(1E3)

TITLE:		
WIRING INSTL-BODY(110R50US)		
DO NOT SCALE DRAWING	SIZE	DWG NO
SHEET 14 OF 34	I E	130596

NOTES:

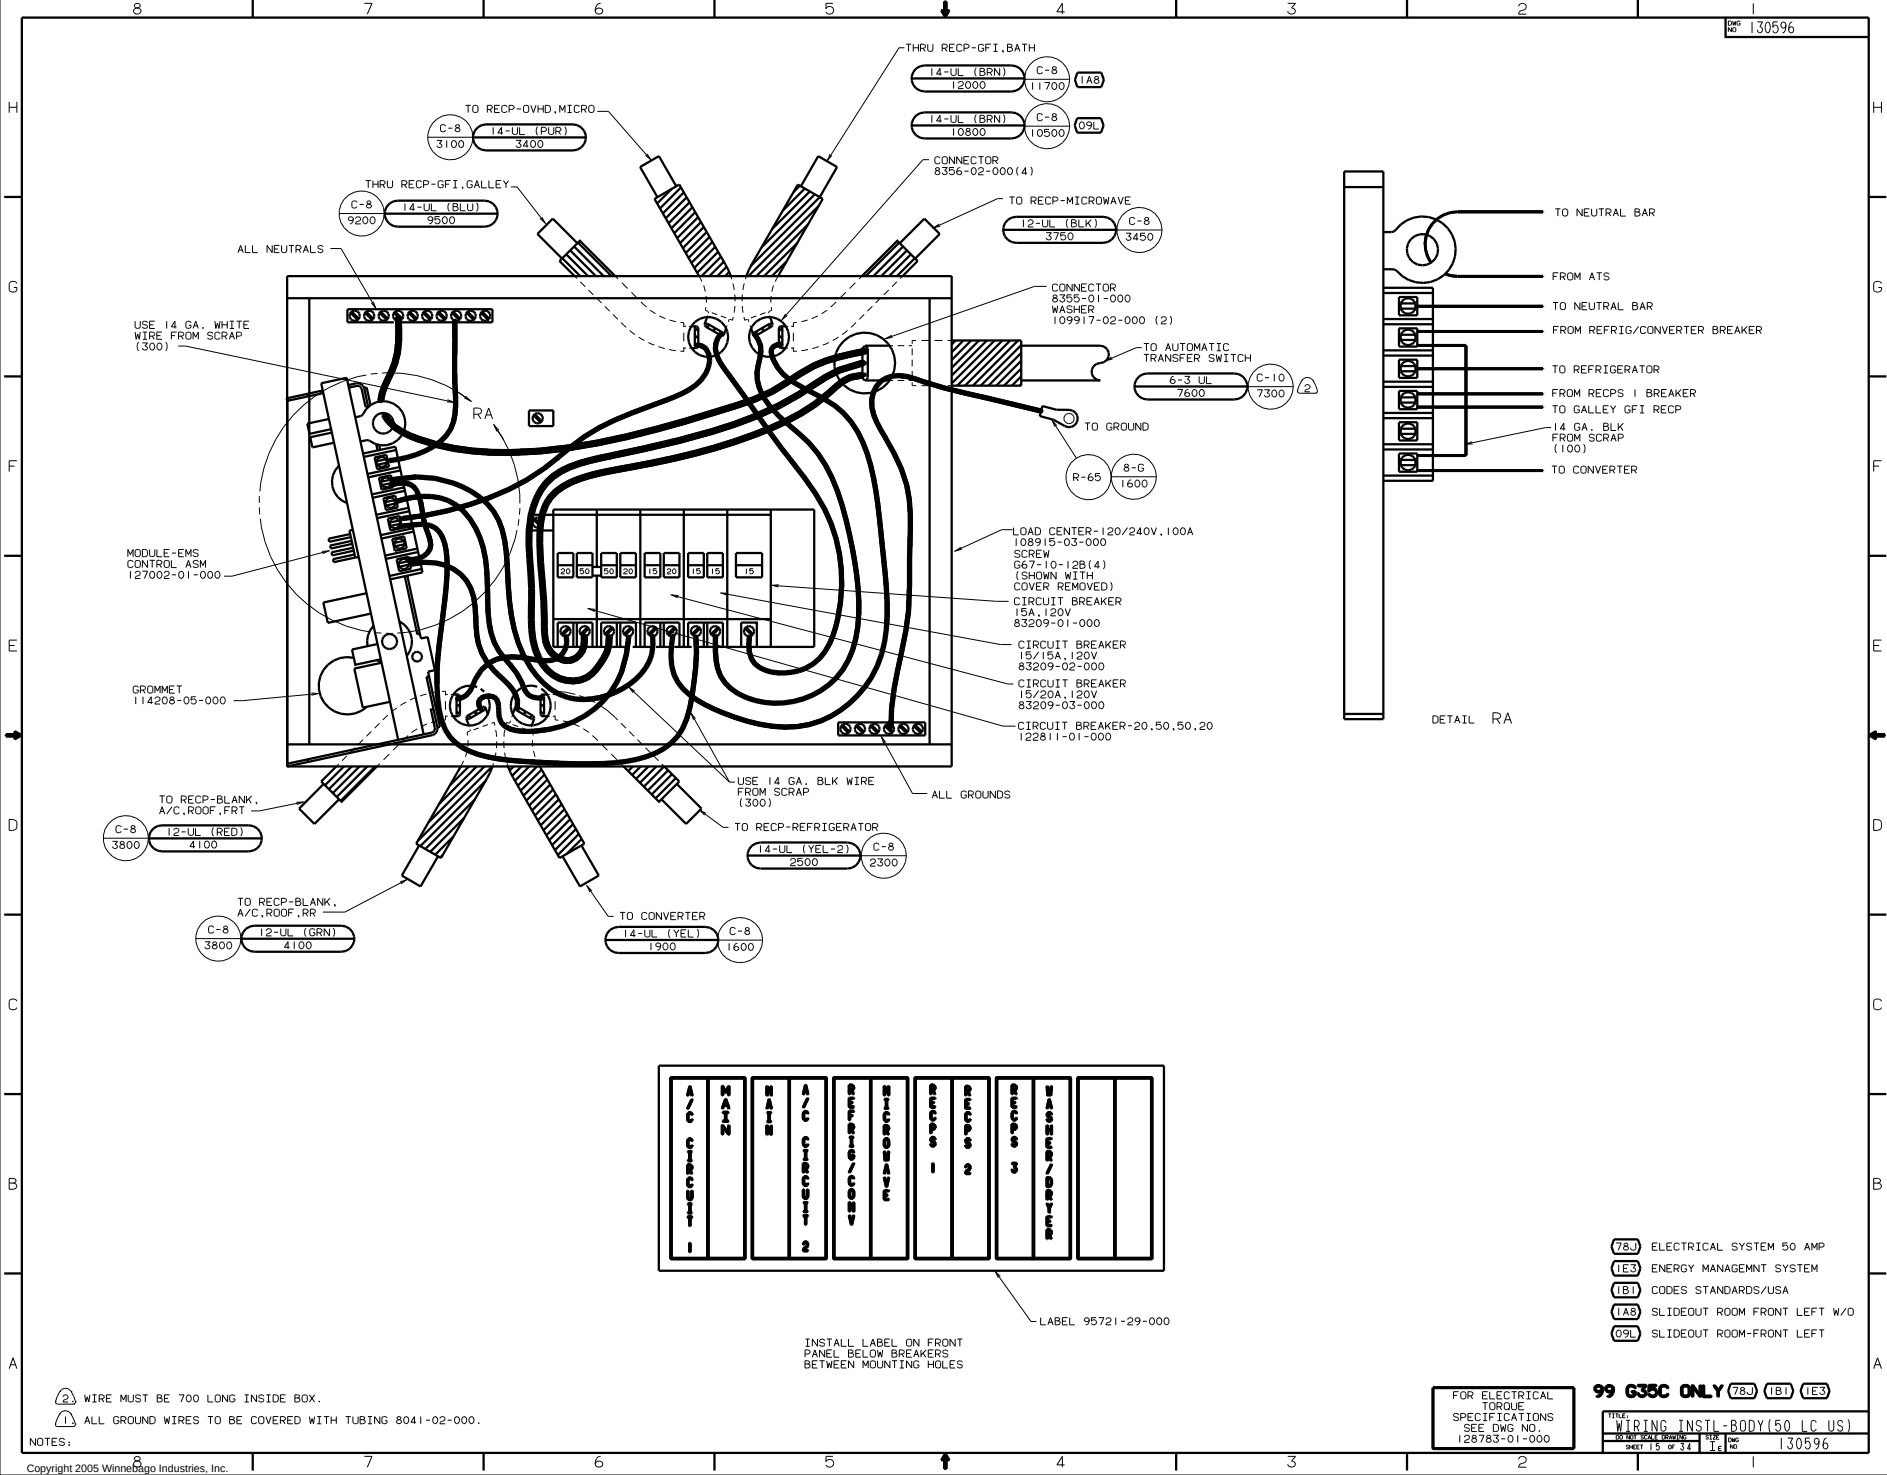

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- (78J) ELECTRICAL SYSTEM 50 AMP
- (IE3) ENERGY MANEMNT SYSTEM
- (IB1) CODES STANDARDS/USA
- (IAB) SLIDEOUT ROOM FRONT LEFT W/O
- (O9L) SLIDEOUT ROOM-FRONT LEFT


99 G35C ONLY (78J) (IB1) (IE3)	
WIRING INSTL-BODY(50 LC US)	
15 OF 34	130596

NOTES:
② WIRE MUST BE 700 LONG INSIDE BOX.
① ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

A/C CIRCUIT 1	MAIN	A/C CIRCUIT 2	REFRIG/ CONV	MICROWAVE	RECP 1	RECP 2	RECP 3	WASHER DRYER	
---------------------	------	---------------------	-----------------	-----------	-----------	-----------	-----------	-----------------	--

INSTALL LABEL ON FRONT
PANEL BELOW BREAKERS
BETWEEN MOUNTING HOLES



LABEL 95721-29-000

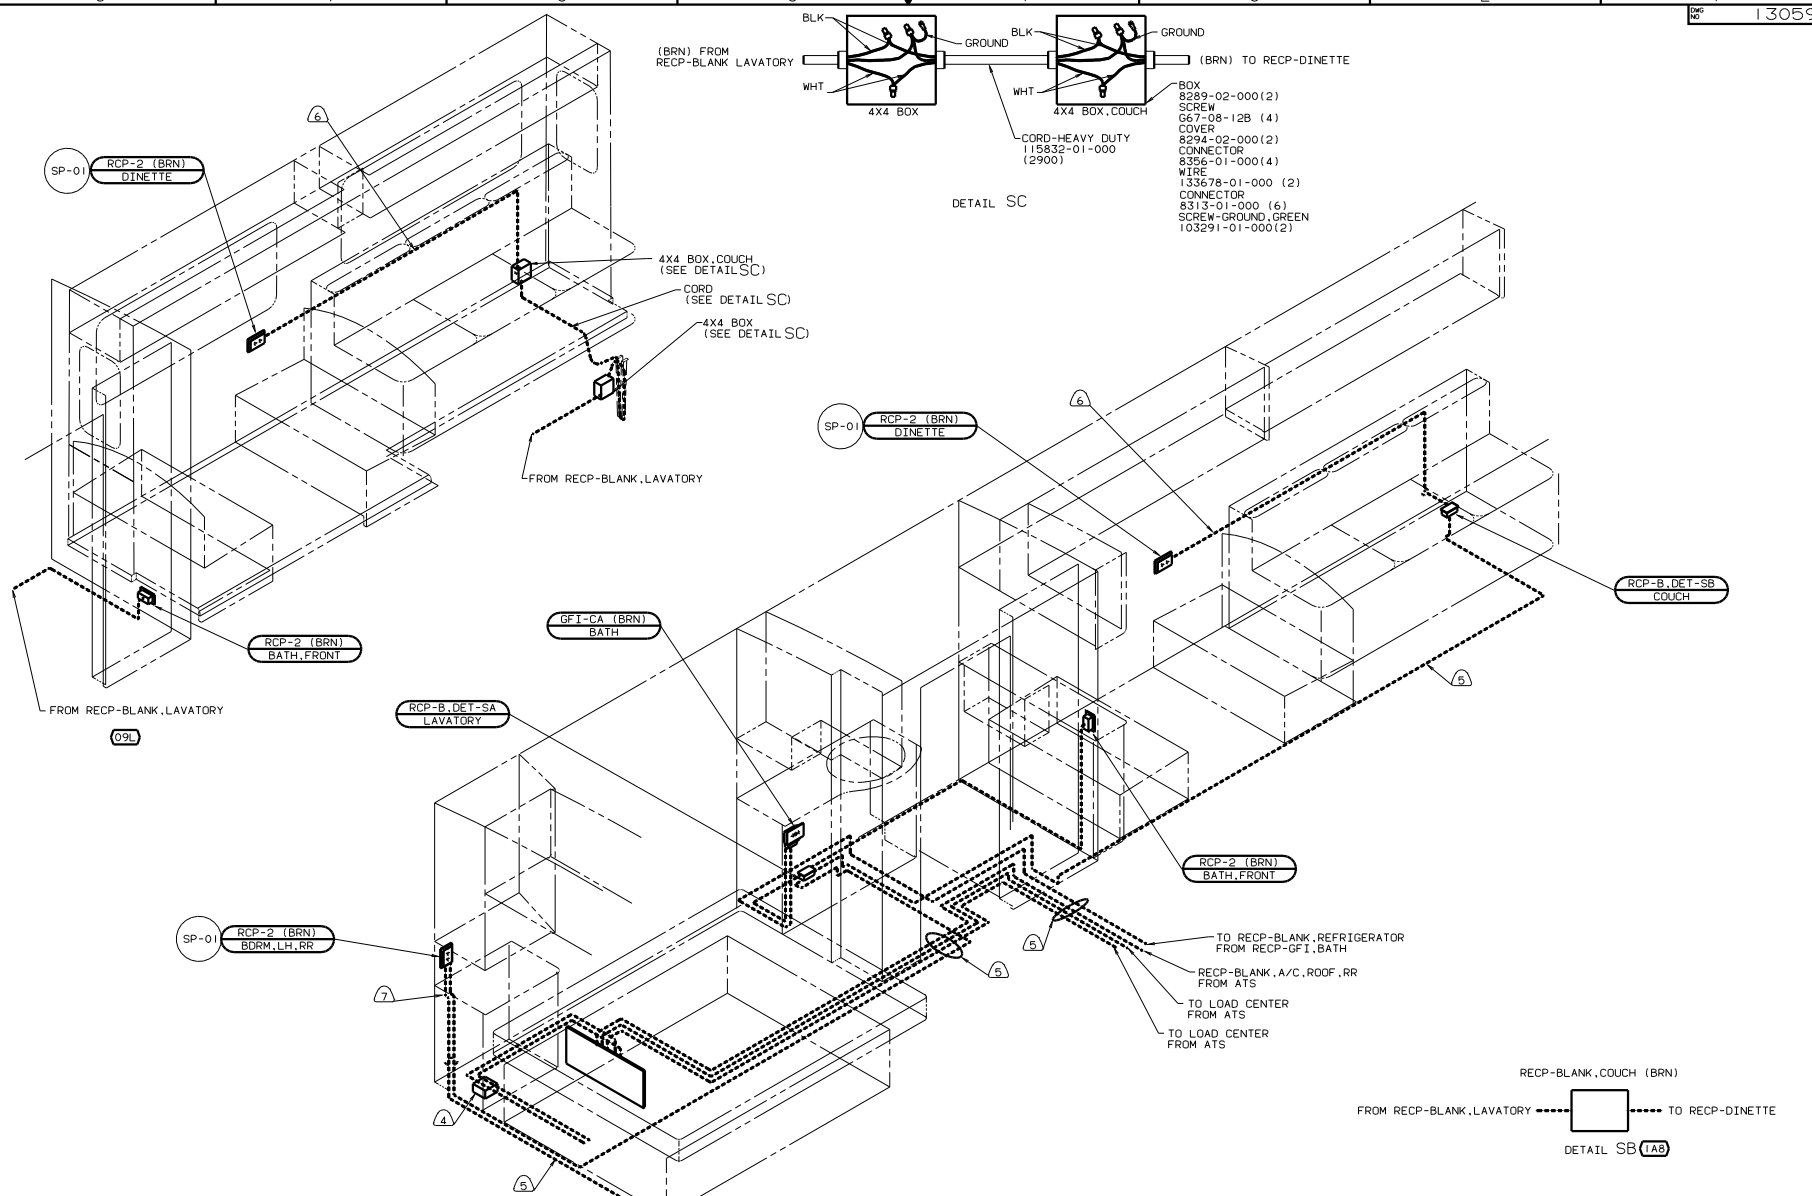

DETAIL SC

- BOX 8289-02-000(2)
- SCREW 667-08-12B (4)
- COVER 8294-02-000(2)
- CONNECTOR 8356-01-000(4)
- WIRE 133678-01-000 (2)
- CONNECTOR 8313-01-000 (6)
- SCREW-GROUND, GREEN 103291-01-000(2)

DETAIL SA



- ROUTE WIRES THRU SIDEWALL.
- WIRE IN SIDEWALL.
- WIRE ROUTED BELOW FLOOR.
- SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.

- ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10495 WITHIN 200 OF OUTLET BOXES, USE SCREW 667-10-12B.
- ALL WIRE ROUTED BELOW FLOOR TO BE CLAMPED WITH CLAMP 10497 AND SCREW 639-08-10 OR TIED WITH WIRE TIE 8343 FIRMLY AGAINST UPPER FLOOR SUPPORT AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.
- ALL WIRE ROUTED ABOVE FLOOR TO BE CLAMPED WITH CLAMP 10495 AND SCREW 667-10-12B OR TIED WITH WIRE TIE 8343 AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWS NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWS NO. 121339-01-000



- 49X BED-QUEEN-BACKWALL
- 45G BED-TWIN
- 26S CODES/STANDARDS-CSA/CMVSS
- 12D ELECTRICAL SYSTEM 30 AMP
- 1E3 ENERGY MANAGEMNT SYSTEM
- 1A8 SLIDEOUT ROOM FRONT LEFT W/O
- 09L SLIDEOUT ROOM-FRONT LEFT

99 F & G35C 26S 12D 1E3

WIRING INSTL-BODY(110130CA)

SHEET 16 OF 34

130596

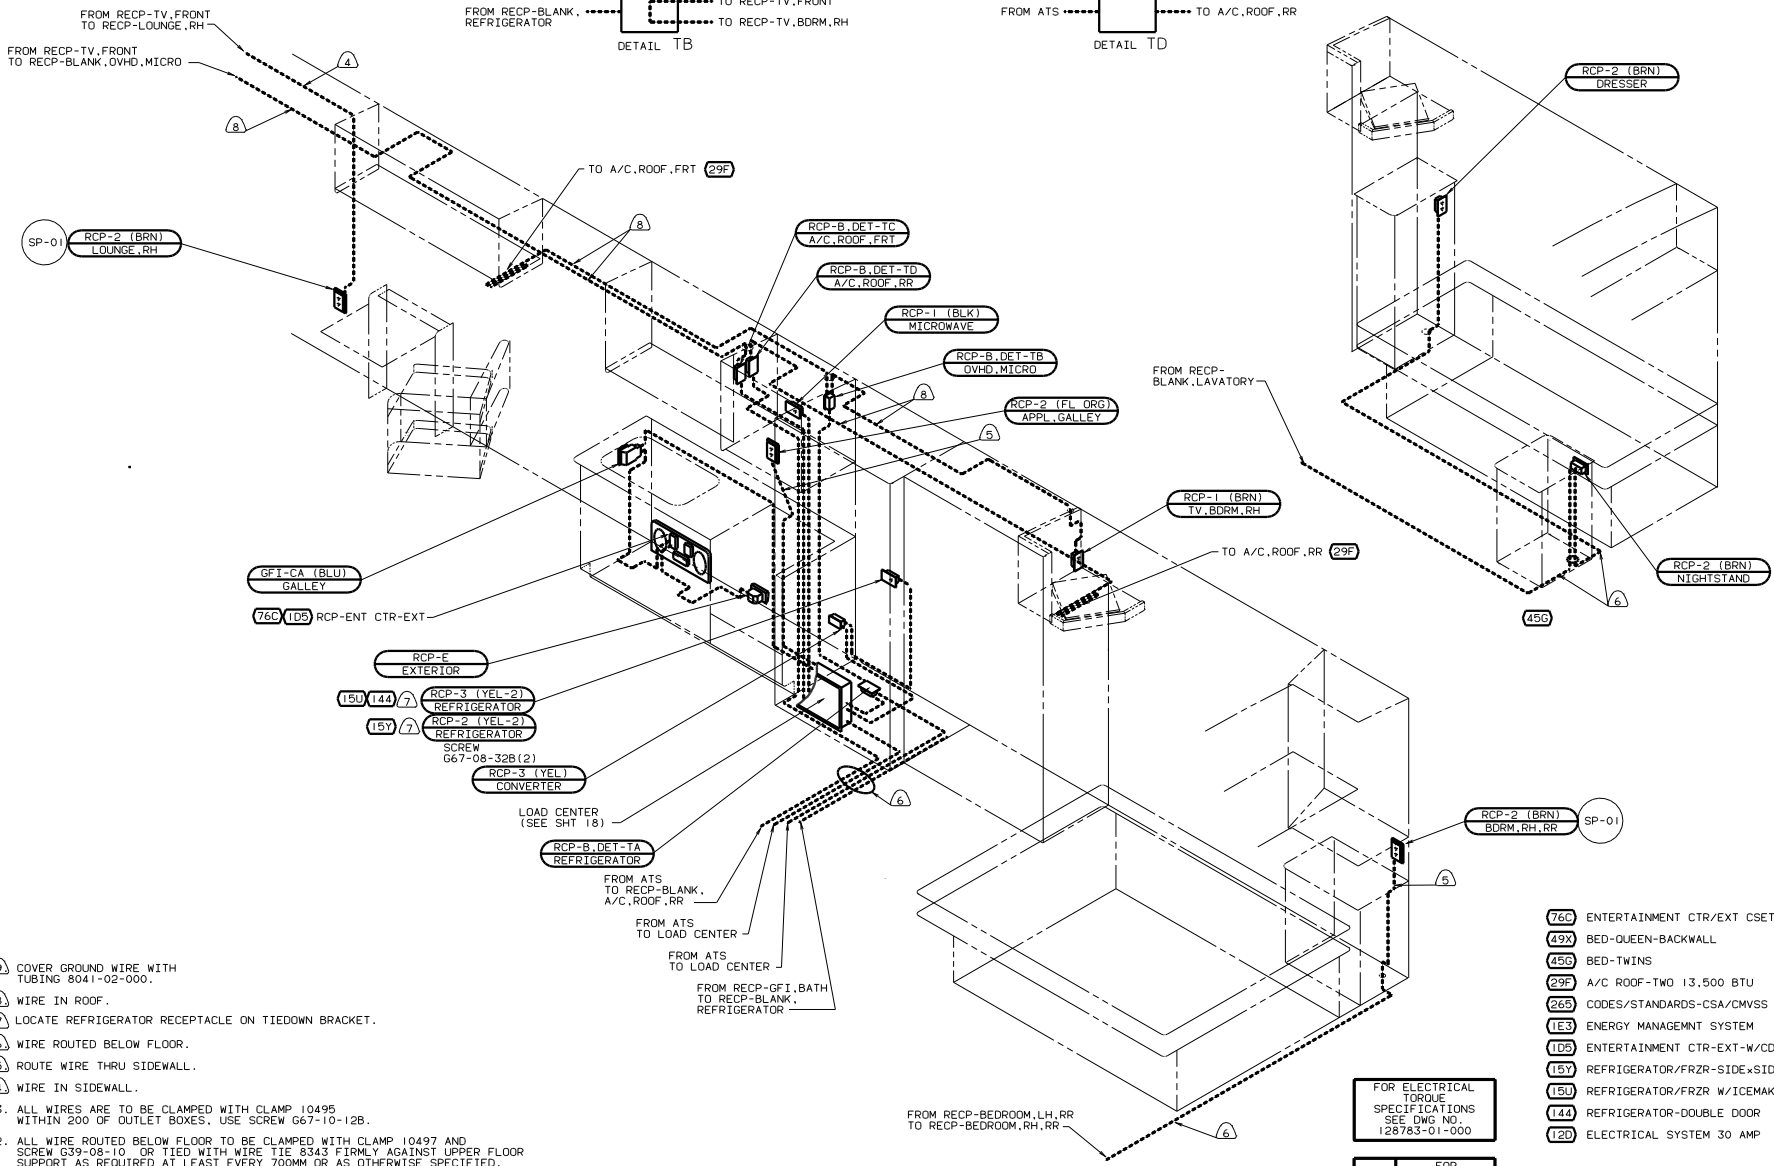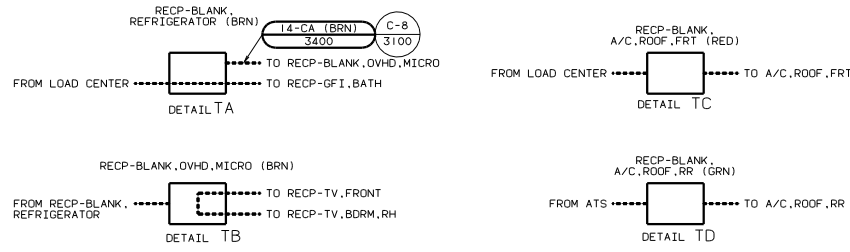

- 9 COVER GROUND WIRE WITH TUBING 8041-02-000.
- 8 WIRE IN ROOF.
- 7 LOCATE REFRIGERATOR RECEPTACLE ON TIEDOWN BRACKET.
- 6 WIRE ROUTED BELOW FLOOR.
- 5 ROUTE WIRE THRU SIDEWALL.
- 4 WIRE IN SIDEWALL.

3. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10495 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.

2. ALL WIRE ROUTED BELOW FLOOR TO BE CLAMPED WITH CLAMP 10497 AND SCREW G39-08-10 OR TIED WITH WIRE TIE 8343 FIRMLY AGAINST UPPER FLOOR SUPPORT AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.

1. ALL WIRE ROUTED ABOVE FLOOR TO BE CLAMPED WITH CLAMP 10495 AND SCREW G67-10-12B OR TIED WITH WIRE TIE 8343 AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128763-01-000




FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 76C ENTERTAINMENT CTR/EXT CSETTE
- 49X BED-QUEEN-BACKWALL
- 45G BED-TWINS
- 29F A/C ROOF-TWO 13,500 BTU
- 265 CODES/STANDARDS-CSA/CMVSS
- 1E3 ENERGY MANAGMNT SYSTEM
- 1D5 ENTERTAINMENT CTR-EXT-W/CD
- 15Y REFRIGERATOR/FRZR-SIDE+SIDE
- 15U REFRIGERATOR/FRZR W/ICEMAKER
- 144 REFRIGERATOR-DOUBLE DOOR
- 120 ELECTRICAL SYSTEM 30 AMP

99 F & G 35C 120 265 1E3

WIRING INSTL-BODY(110R30CA)

130596

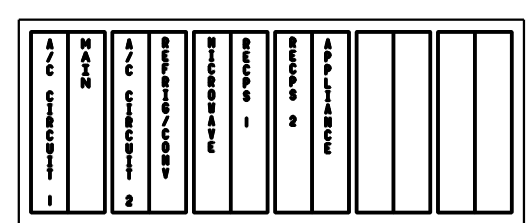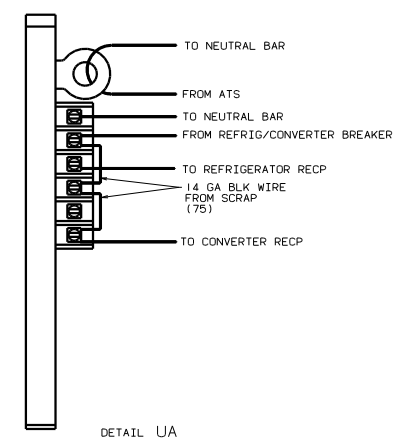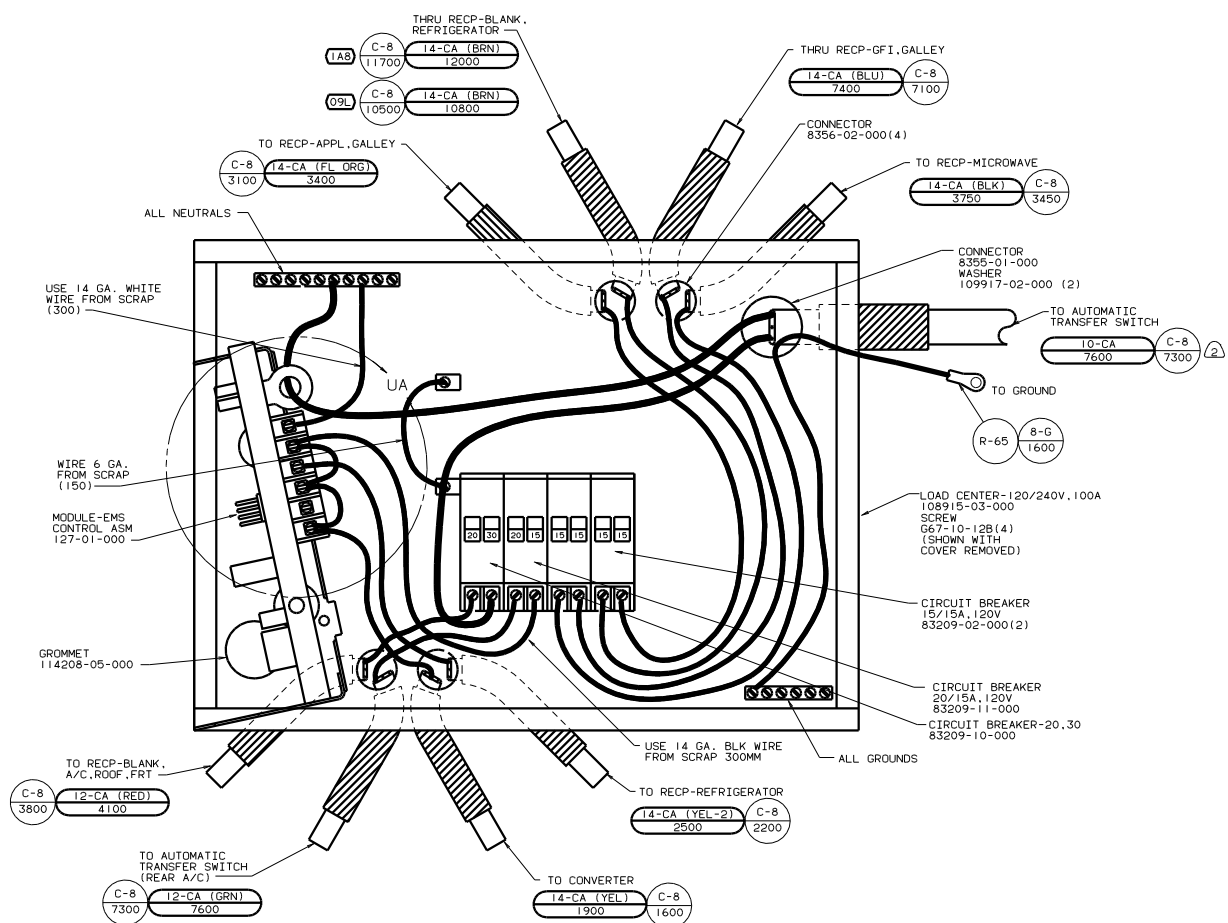






INSTALL LABEL ON FRONT PANEL BELOW BREAKERS BETWEEN MOUNTING HOLES
 LABEL 95721-28-000

2 WIRE MUST BE 700 LONG INSIDE BOX.
 1 ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

- 265 CODES/STANDARDS-CSA/CMVSS
- 1E3 ENERGY MANEGMNT SYSTEM
- 1A8 SLIDEOUT ROOM FRONT LEFT W/O
- 12D ELECTRICAL SYSTEM 30 AMP
- 09L SLIDEOUT ROOM-FRONT LEFT

X-X	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000	FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000	99 F & G35C 120 265 1E3
	TITLE: WIRING INSTL-BODY(30 LC CA) 30 GA BLK WIRE SHEET 18 OF 34 130596		

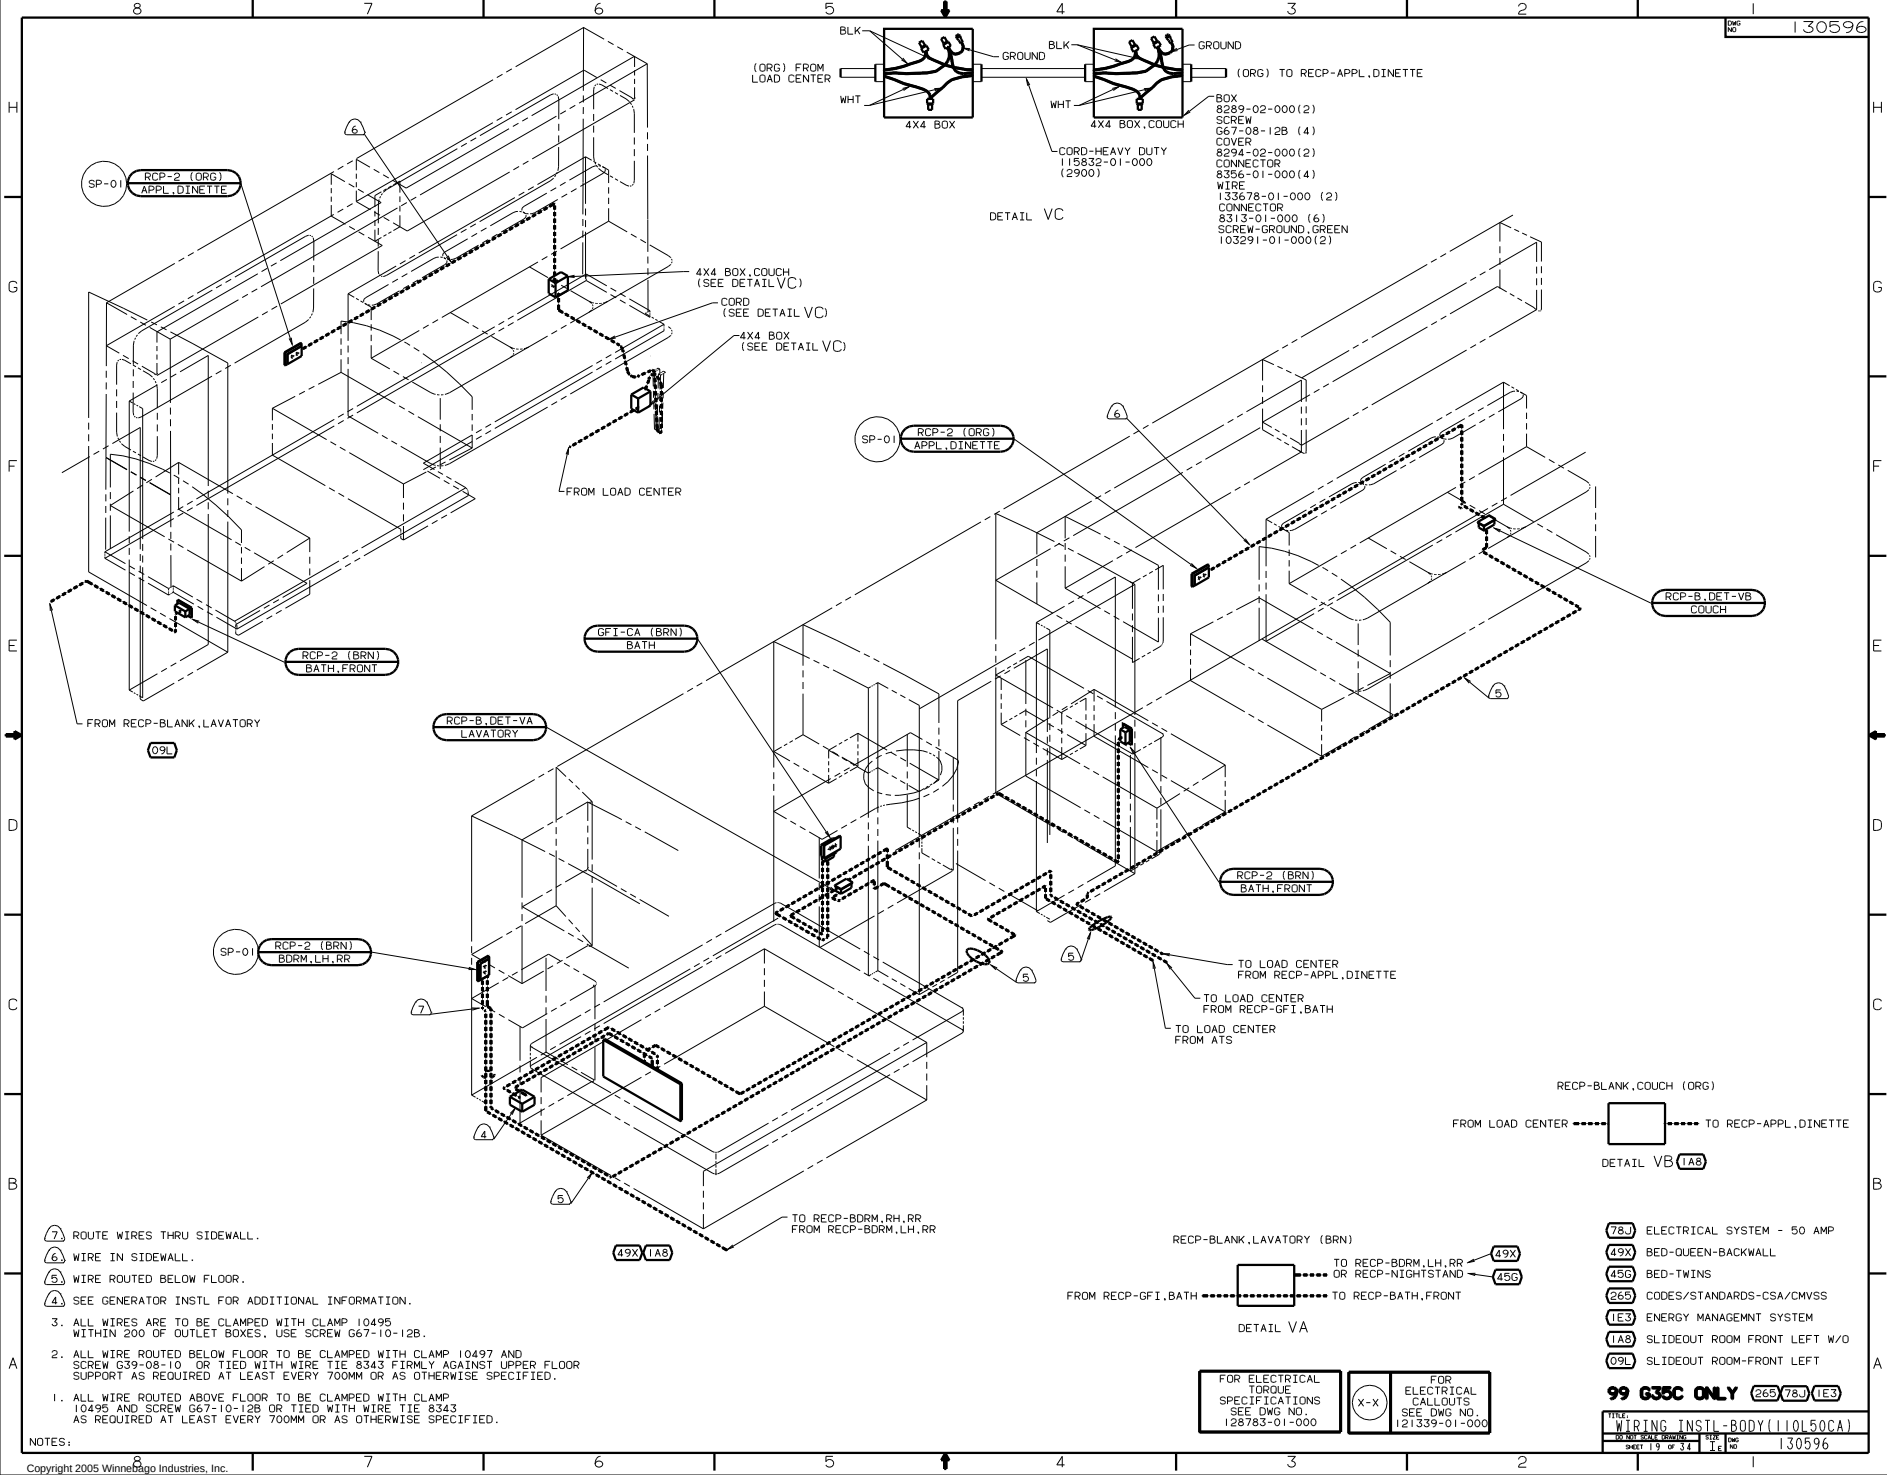

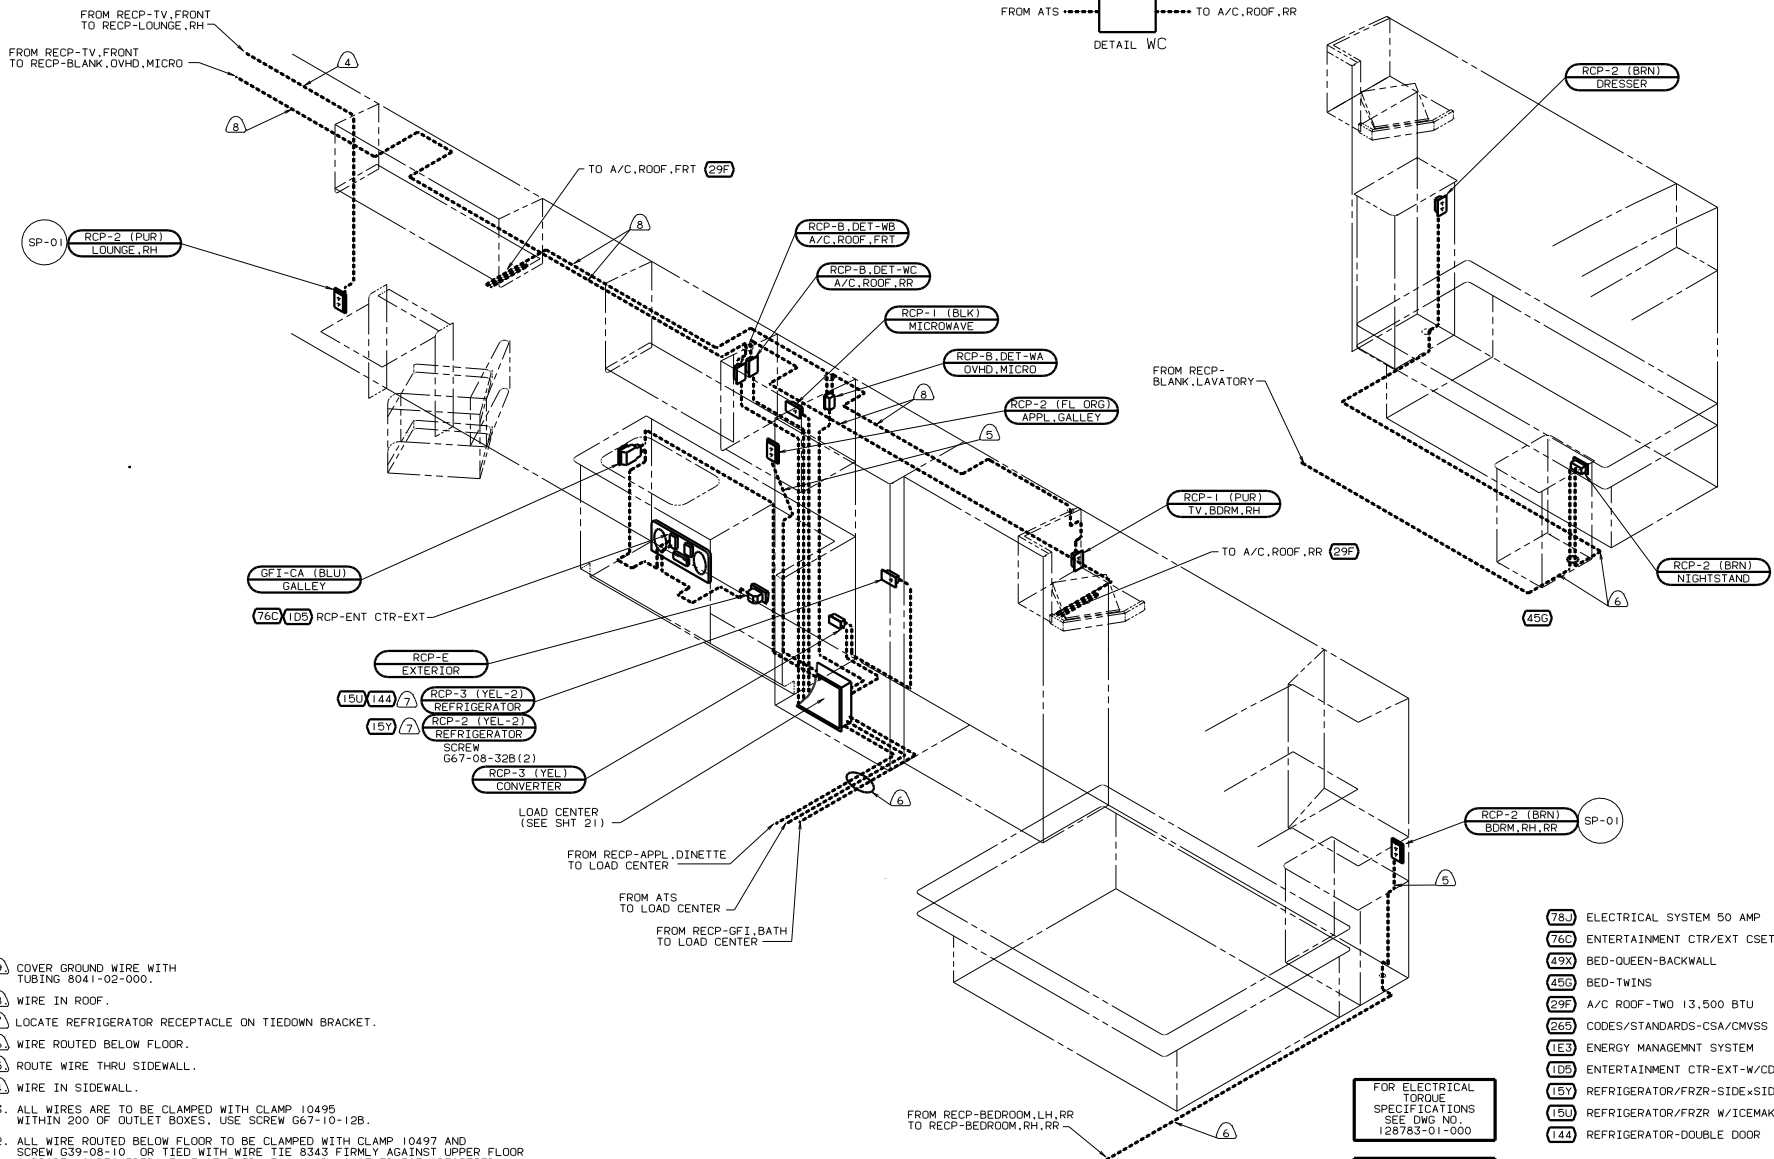

- 9 COVER GROUND WIRE WITH TUBING 8041-02-000.
- 8 WIRE IN ROOF.
- 7 LOCATE REFRIGERATOR RECEPTACLE ON TIEDOWN BRACKET.
- 6 WIRE ROUTED BELOW FLOOR.
- 5 ROUTE WIRE THRU SIDEWALL.
- 4 WIRE IN SIDEWALL.

3. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10495 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
2. ALL WIRE ROUTED BELOW FLOOR TO BE CLAMPED WITH CLAMP 10497 AND SCREW G39-08-10 OR TIED WITH WIRE TIE 8343 FIRMLY AGAINST UPPER FLOOR SUPPORT AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.
1. ALL WIRE ROUTED ABOVE FLOOR TO BE CLAMPED WITH CLAMP 10495 AND SCREW G67-10-12B OR TIED WITH WIRE TIE 8343 AS REQUIRED AT LEAST EVERY 700MM OR AS OTHERWISE SPECIFIED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 78J ELECTRICAL SYSTEM 50 AMP
- 76C ENTERTAINMENT CTR/EXT CSETTE
- 49X BED-QUEEN-BACKWALL
- 45G BED-TWINS
- 29F A/C ROOF-TWO 13,500 BTU CODES/STANDARDS-CSA/CMVSS
- 26S ENERGY MANEGMNT SYSTEM
- 1E3 ENTERTAINMENT CTR-EXT-W/CD
- 15Y REFRIGERATOR/FRZR-SIDE*SIDE
- 15U REFRIGERATOR/FRZR W/ICEMAKER
- 144 REFRIGERATOR-DOUBLE DOOR




99 G35C ONLY (78J)(1E1)(1E3)

WIRING INSTL-BODY(110R50CA)

DATE: 10/20/2005

SHEET 20 OF 33

130596

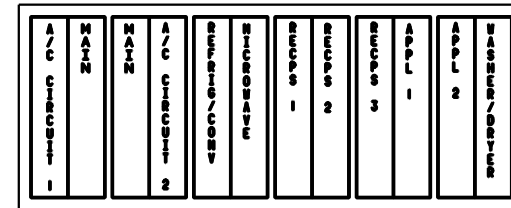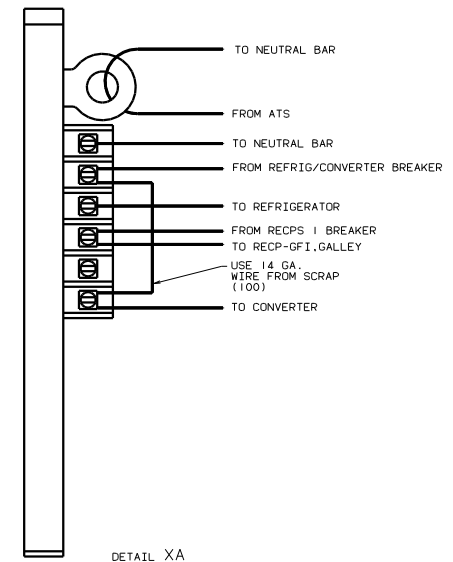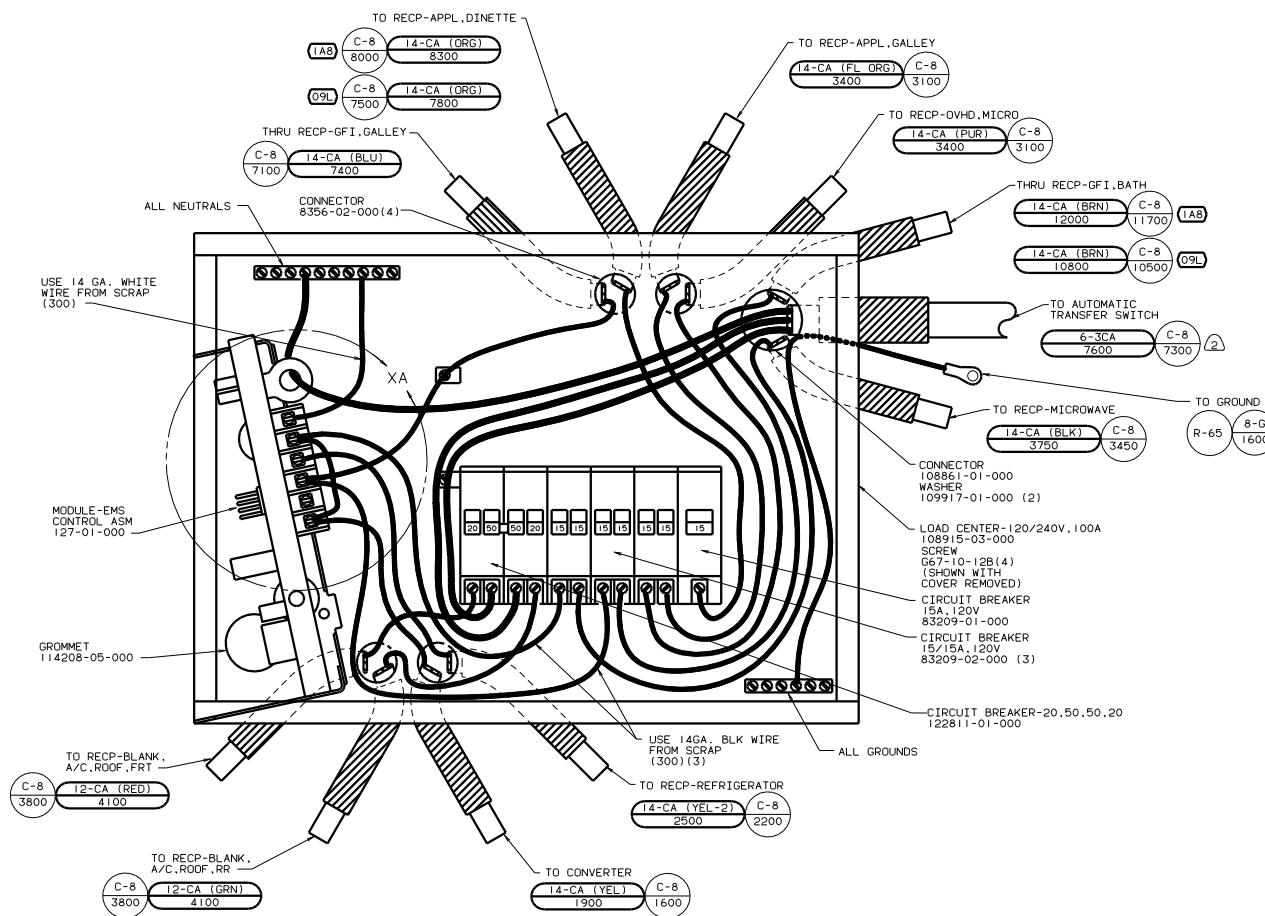

INSTALL LABEL ON FRONT PANEL BELOW BREAKERS BETWEEN MOUNTING HOLES





LABEL 95721-30-000

- NOTES:
- ② WIRE MUST BE 700 LONG INSIDE BOX.
 - ① ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

- ⑦8① ELECTRICAL SYSTEM 50 AMP
- ②65 CODES/STANDARDS-CSA/CMVSS
- ①E3 ENERGY MANAGMNT SYSTEM
- ①A8 SLIDEOUT ROOM FRONT LEFT W/O
- ①9L SLIDEOUT ROOM-FRONT LEFT

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

99 G35C ONLY ⑦8① ②65 ①E3
 WIRING INSTL-BODY(50 LC CA)
 SHEET 21 OF 34 130596

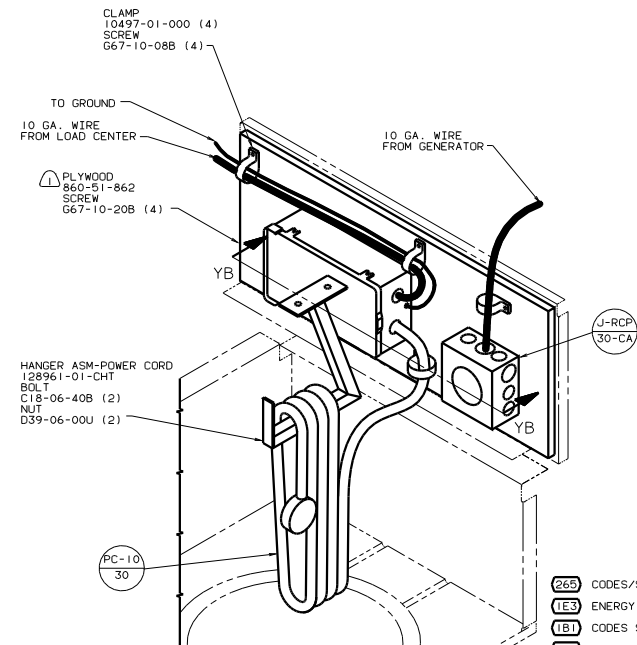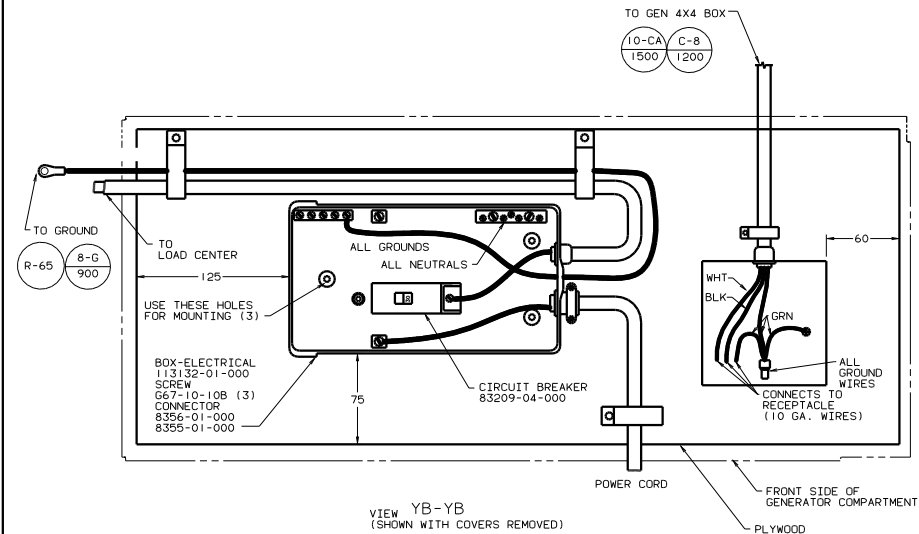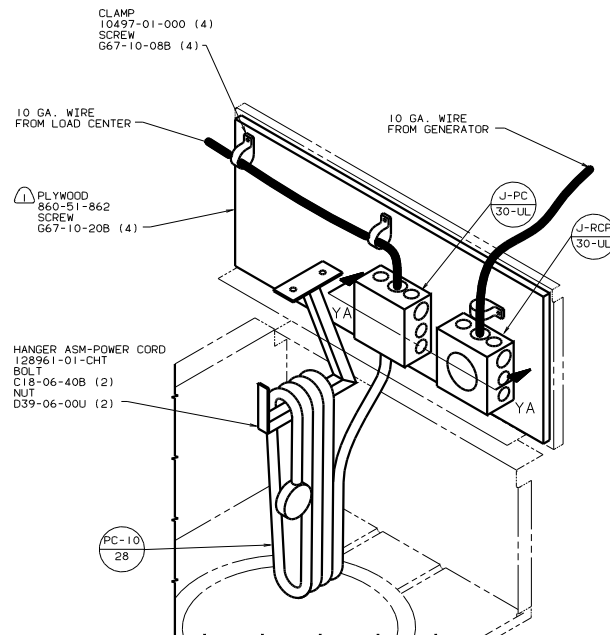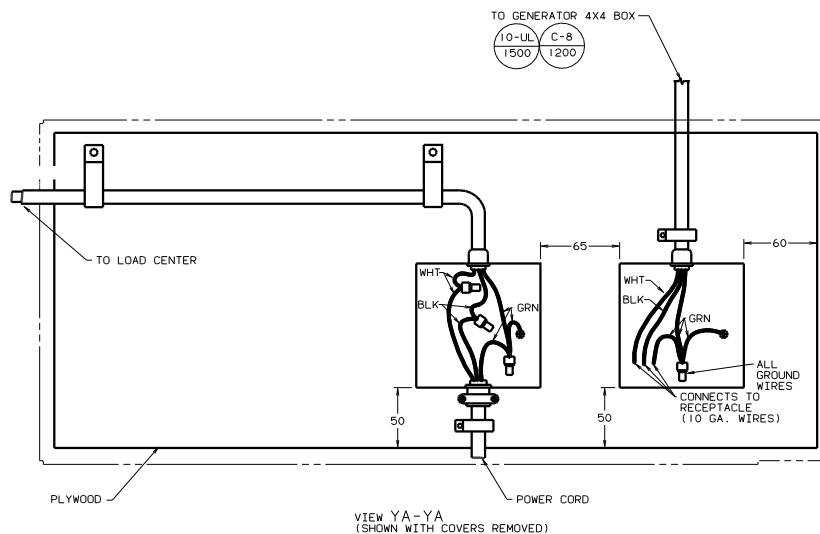

- 2 WITHOUT 1E3
- 1 PAINT EXPOSED SURFACES BLACK 106112-01-000.

NOTES:

1B1 265

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1E3 ENERGY MANAGEMNT SYSTEM
- 1B1 CODES STANDARDS/USA
- 120 ELECTRICAL SYSTEM 30 AMP


99 F35C ONLY 120 2



TITLE: WIRING INSTL-BODY (PCI)

20 THE BULKY GROUP






SHEET 22 OF 34

130596

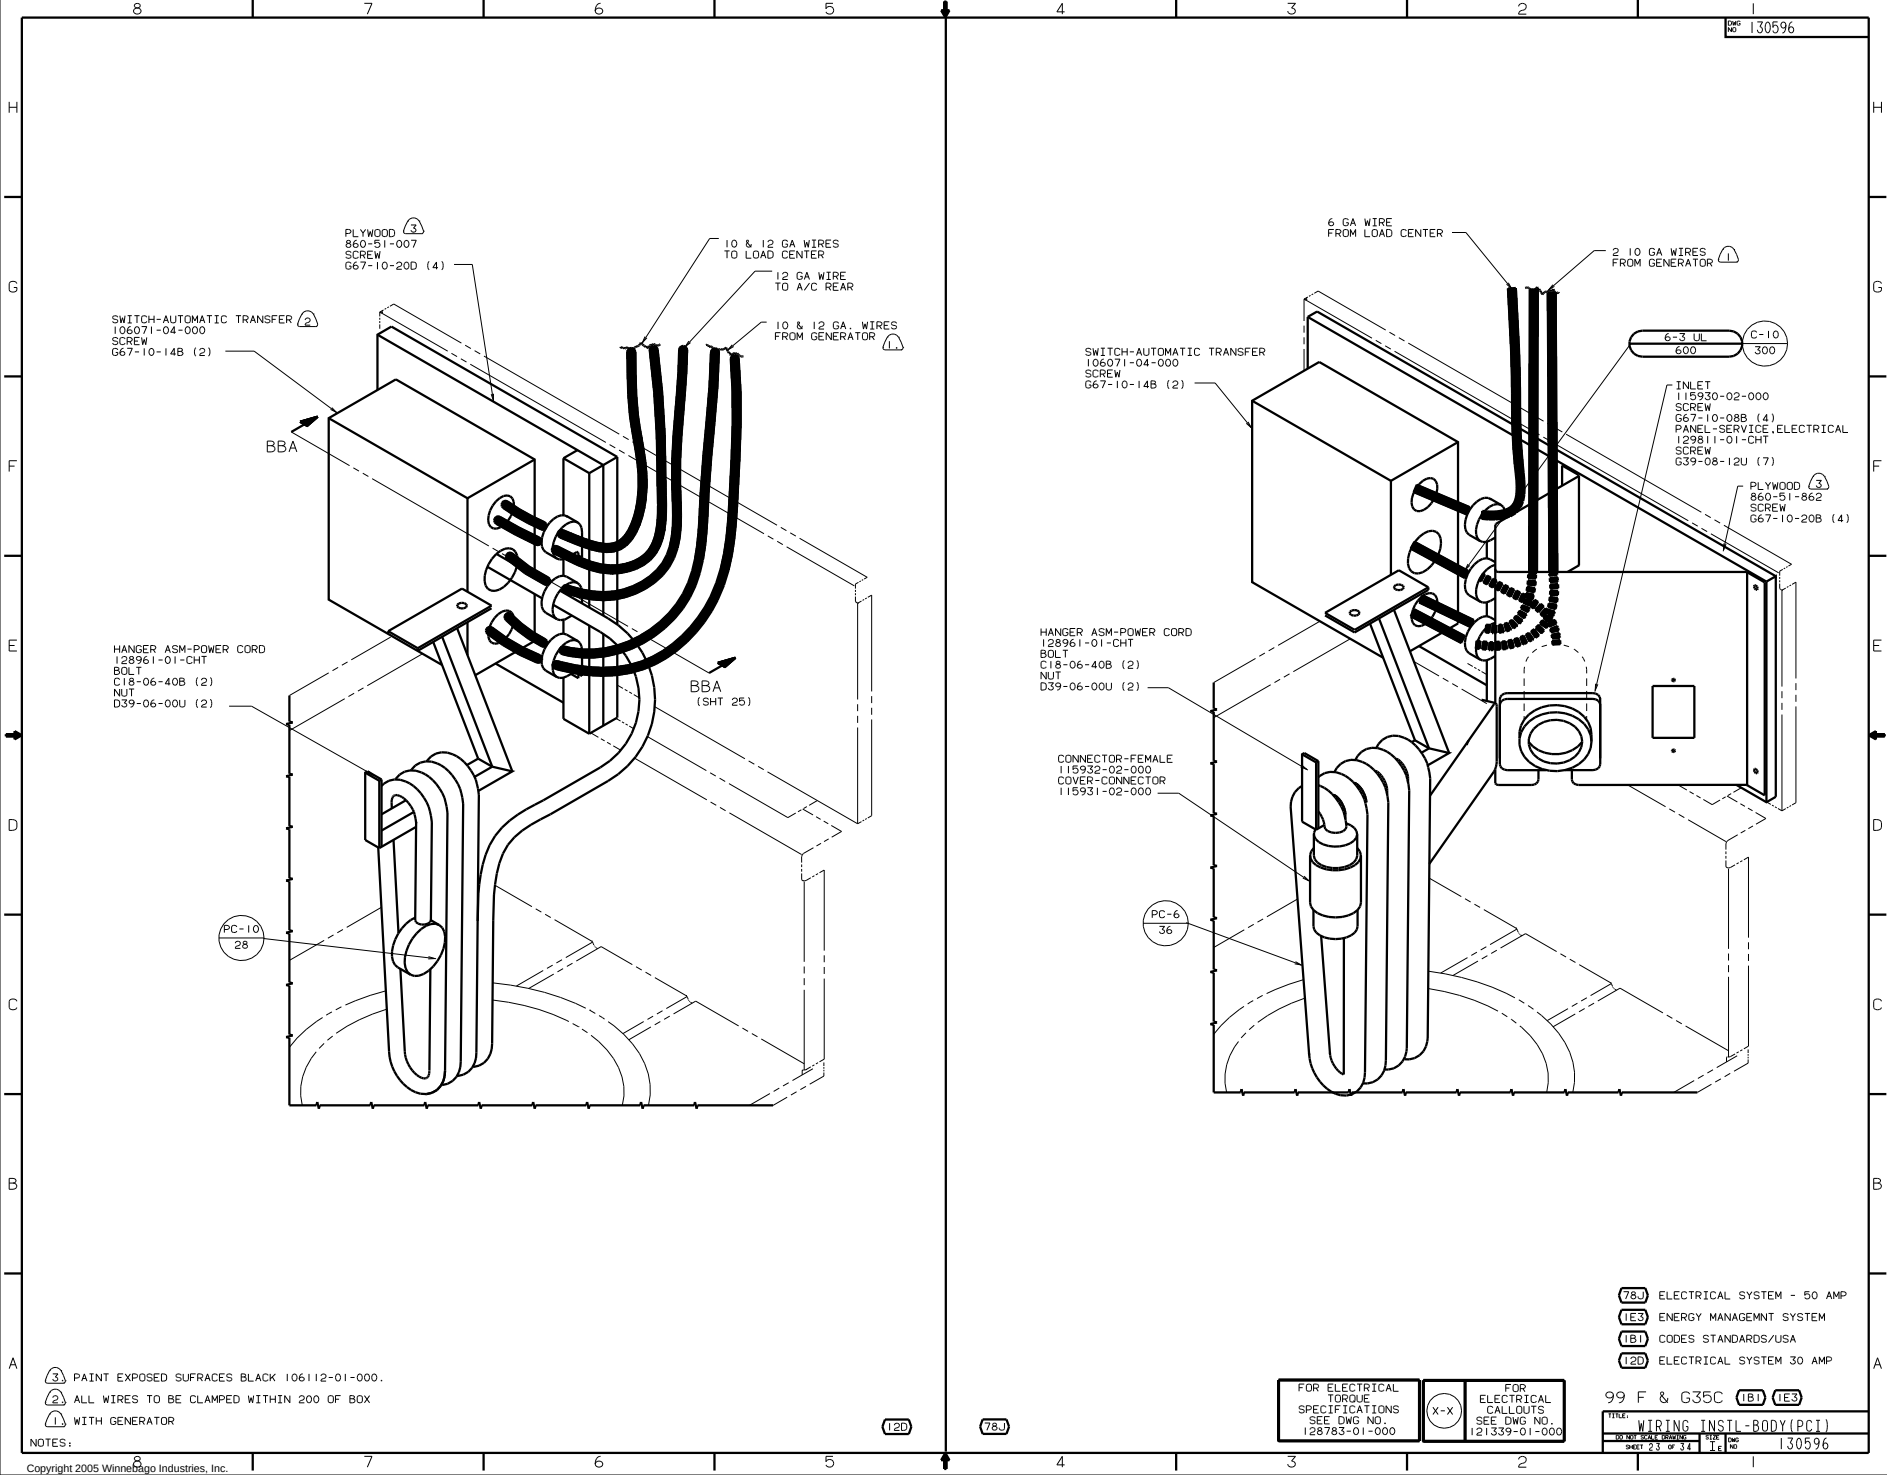

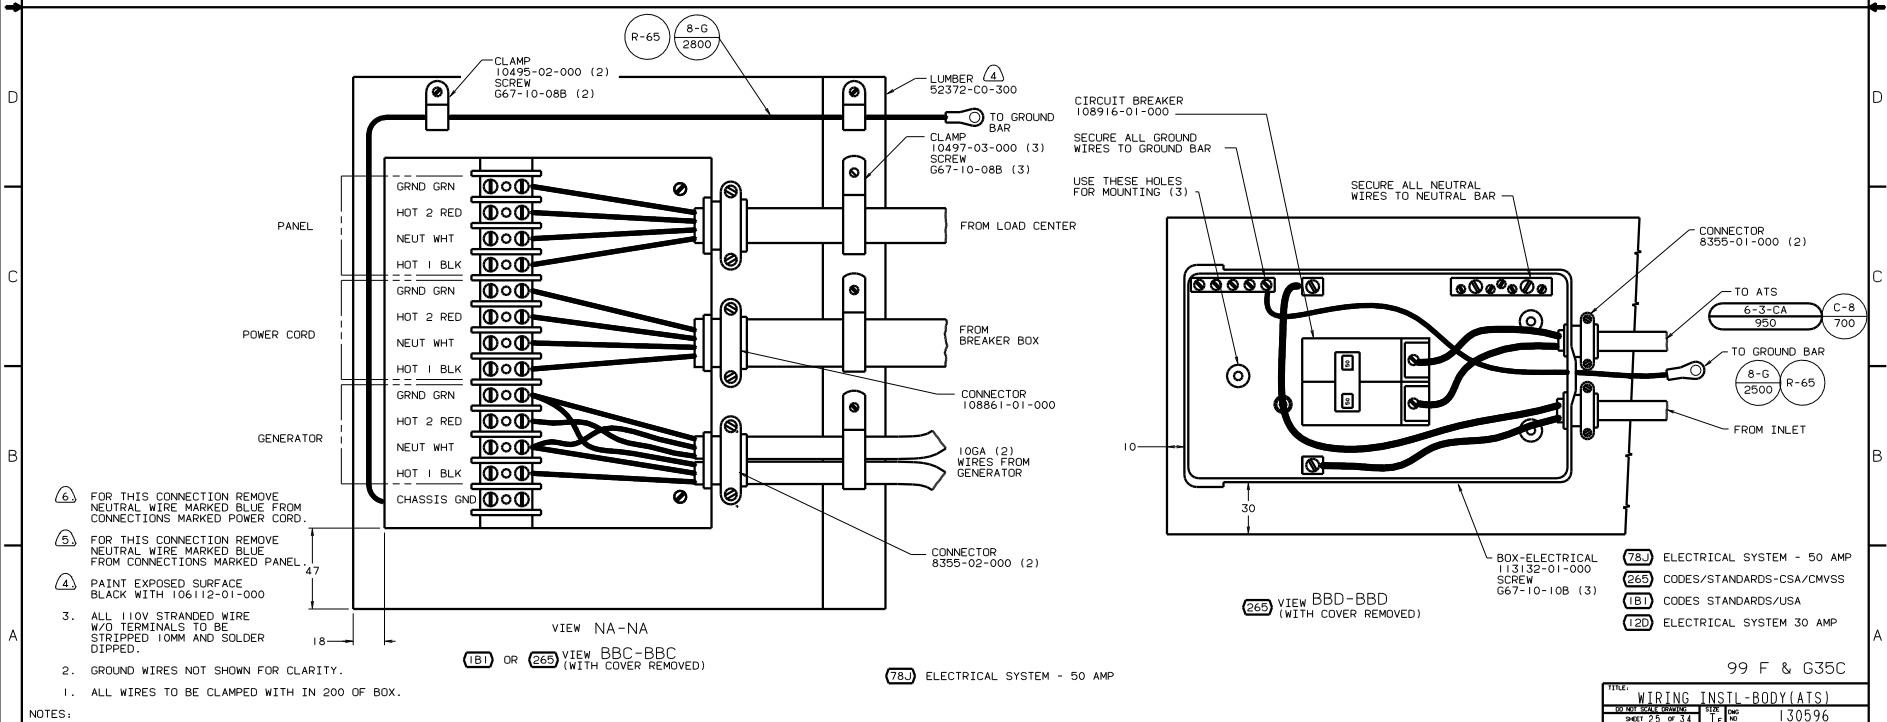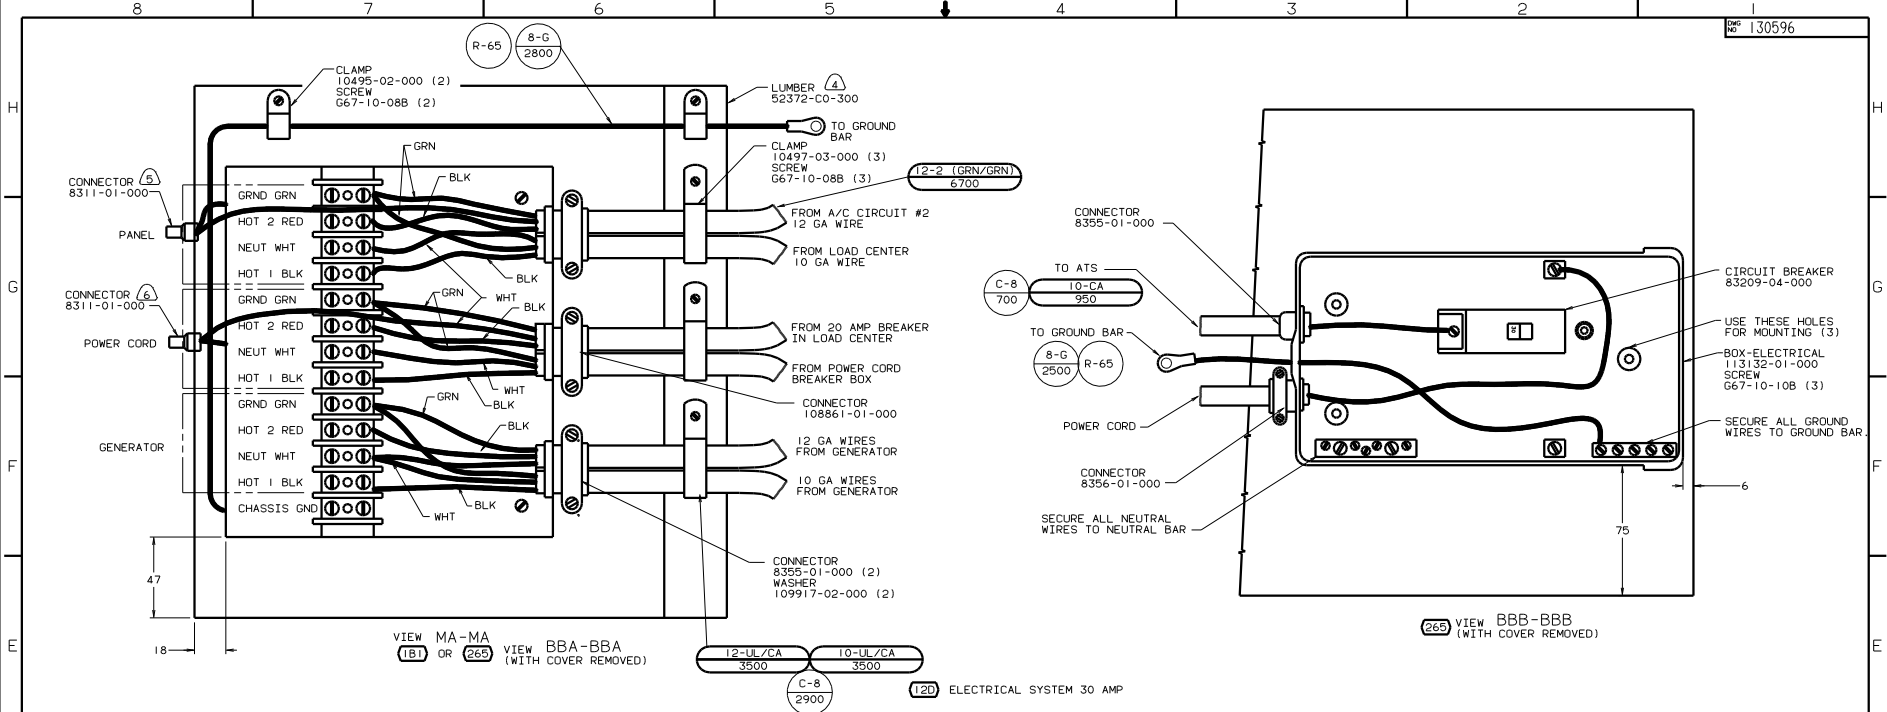



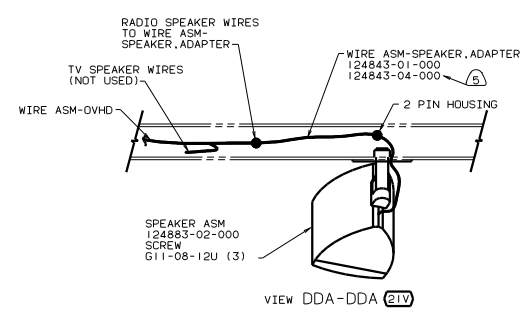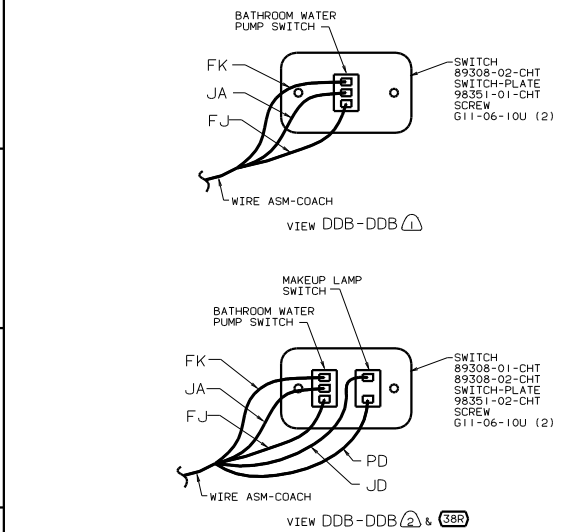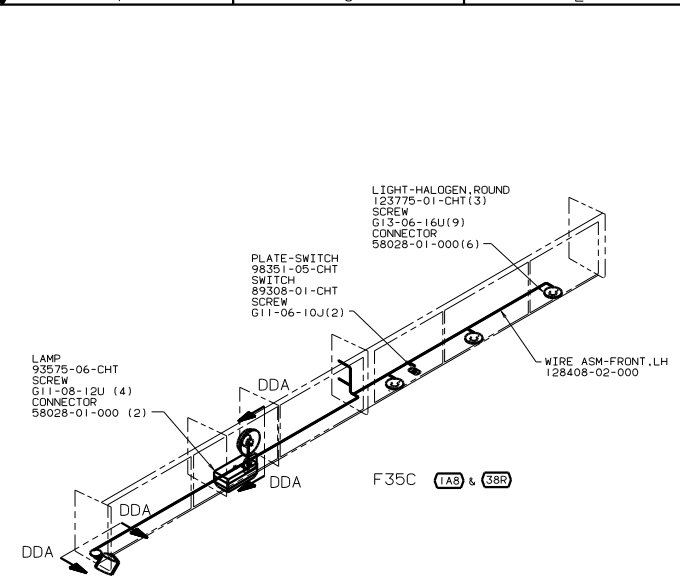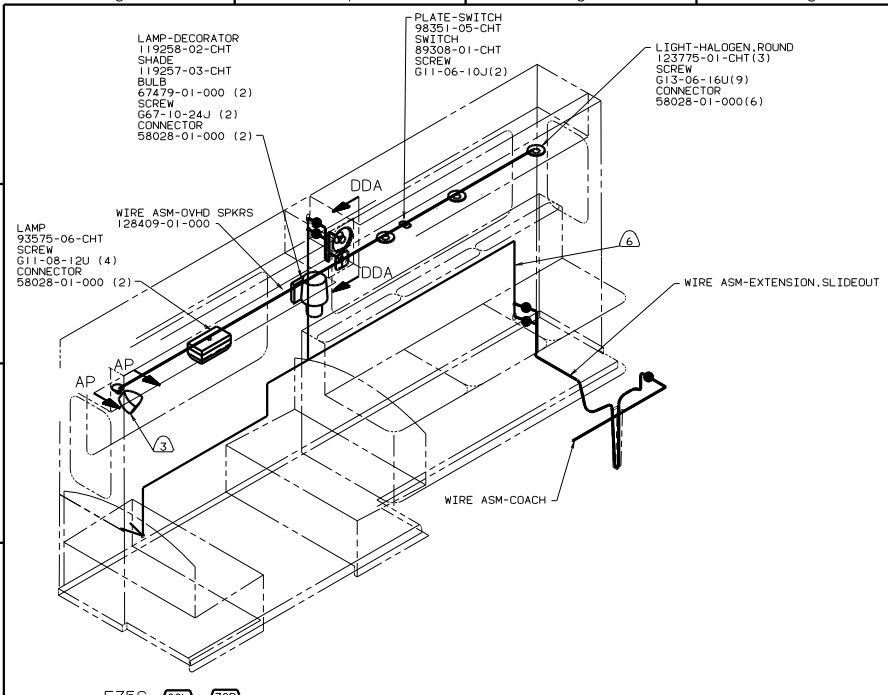

- NOTES:
- (6) WIRE IN SIDEWALL
 - (5) (09L) LEFT SIDE ONLY
 - (4) WITHOUT (21V)
 - (3) NOT USED WITH (09L)
 - (2) G-SERIES UNITS.
 - (1) F-SERIES UNITS.

- (420) TV-19" FRONT WITH REMOTE
- (38R) COMFORT&CONVENIENCE PKG
- (265) CODES/STANDARDS-CSA/CMVSS
- (21V) SOUND SYSTEM-DELUXE
- (210) TV-19" W/VCR/SWITCHING SYS
- (181) CODES STANDARDS/USA
- (1A8) SLIDEOUT ROOM FRONT LEFT W/O
- (09L) SLIDEOUT ROOM-FRONT LEFT

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


99 F35C ONLY (181) (265)

TITLE: WIRING INSTL-BODY (12 L)


SHEET 27 OF 34

130596




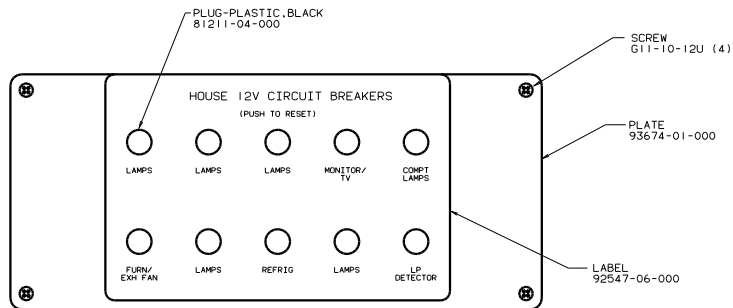

PNL-BRKR, 12V
(FRONT VIEW)

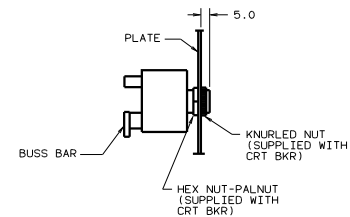

SECTION FFA-FFA

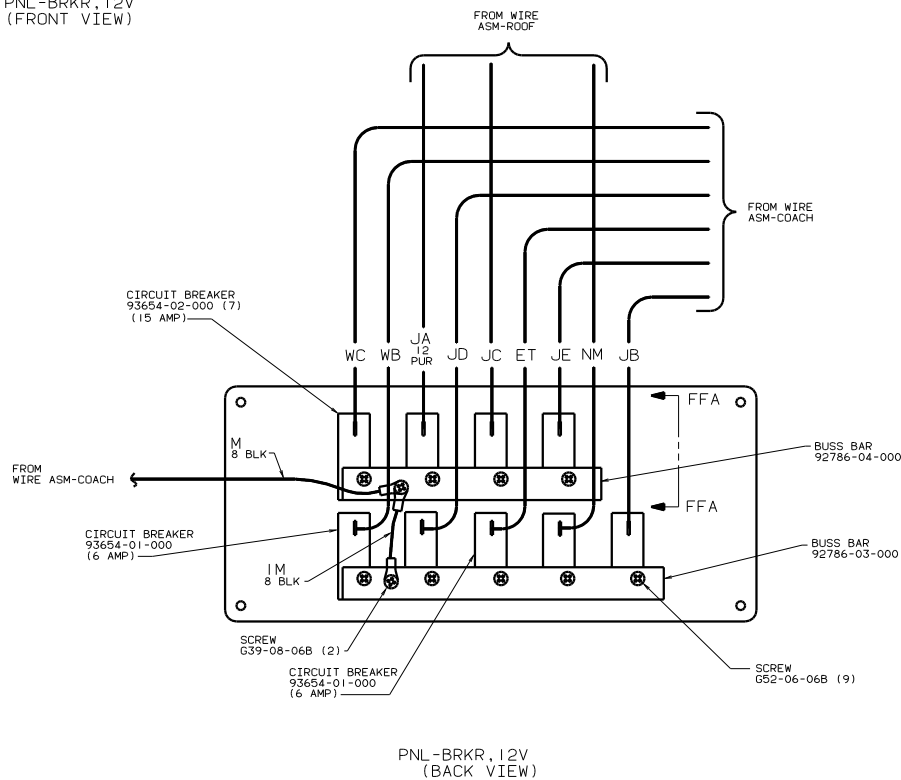



PNL-BRKR, 12V
(BACK VIEW)















FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO
128783-01-000

99 F & G35C
265 CODE STANDARDS-CSA
1B1 CODE STANDARDS-USA

WIRING INSTL-BODY(12 BP)
SHEET 29 OF 34
130596

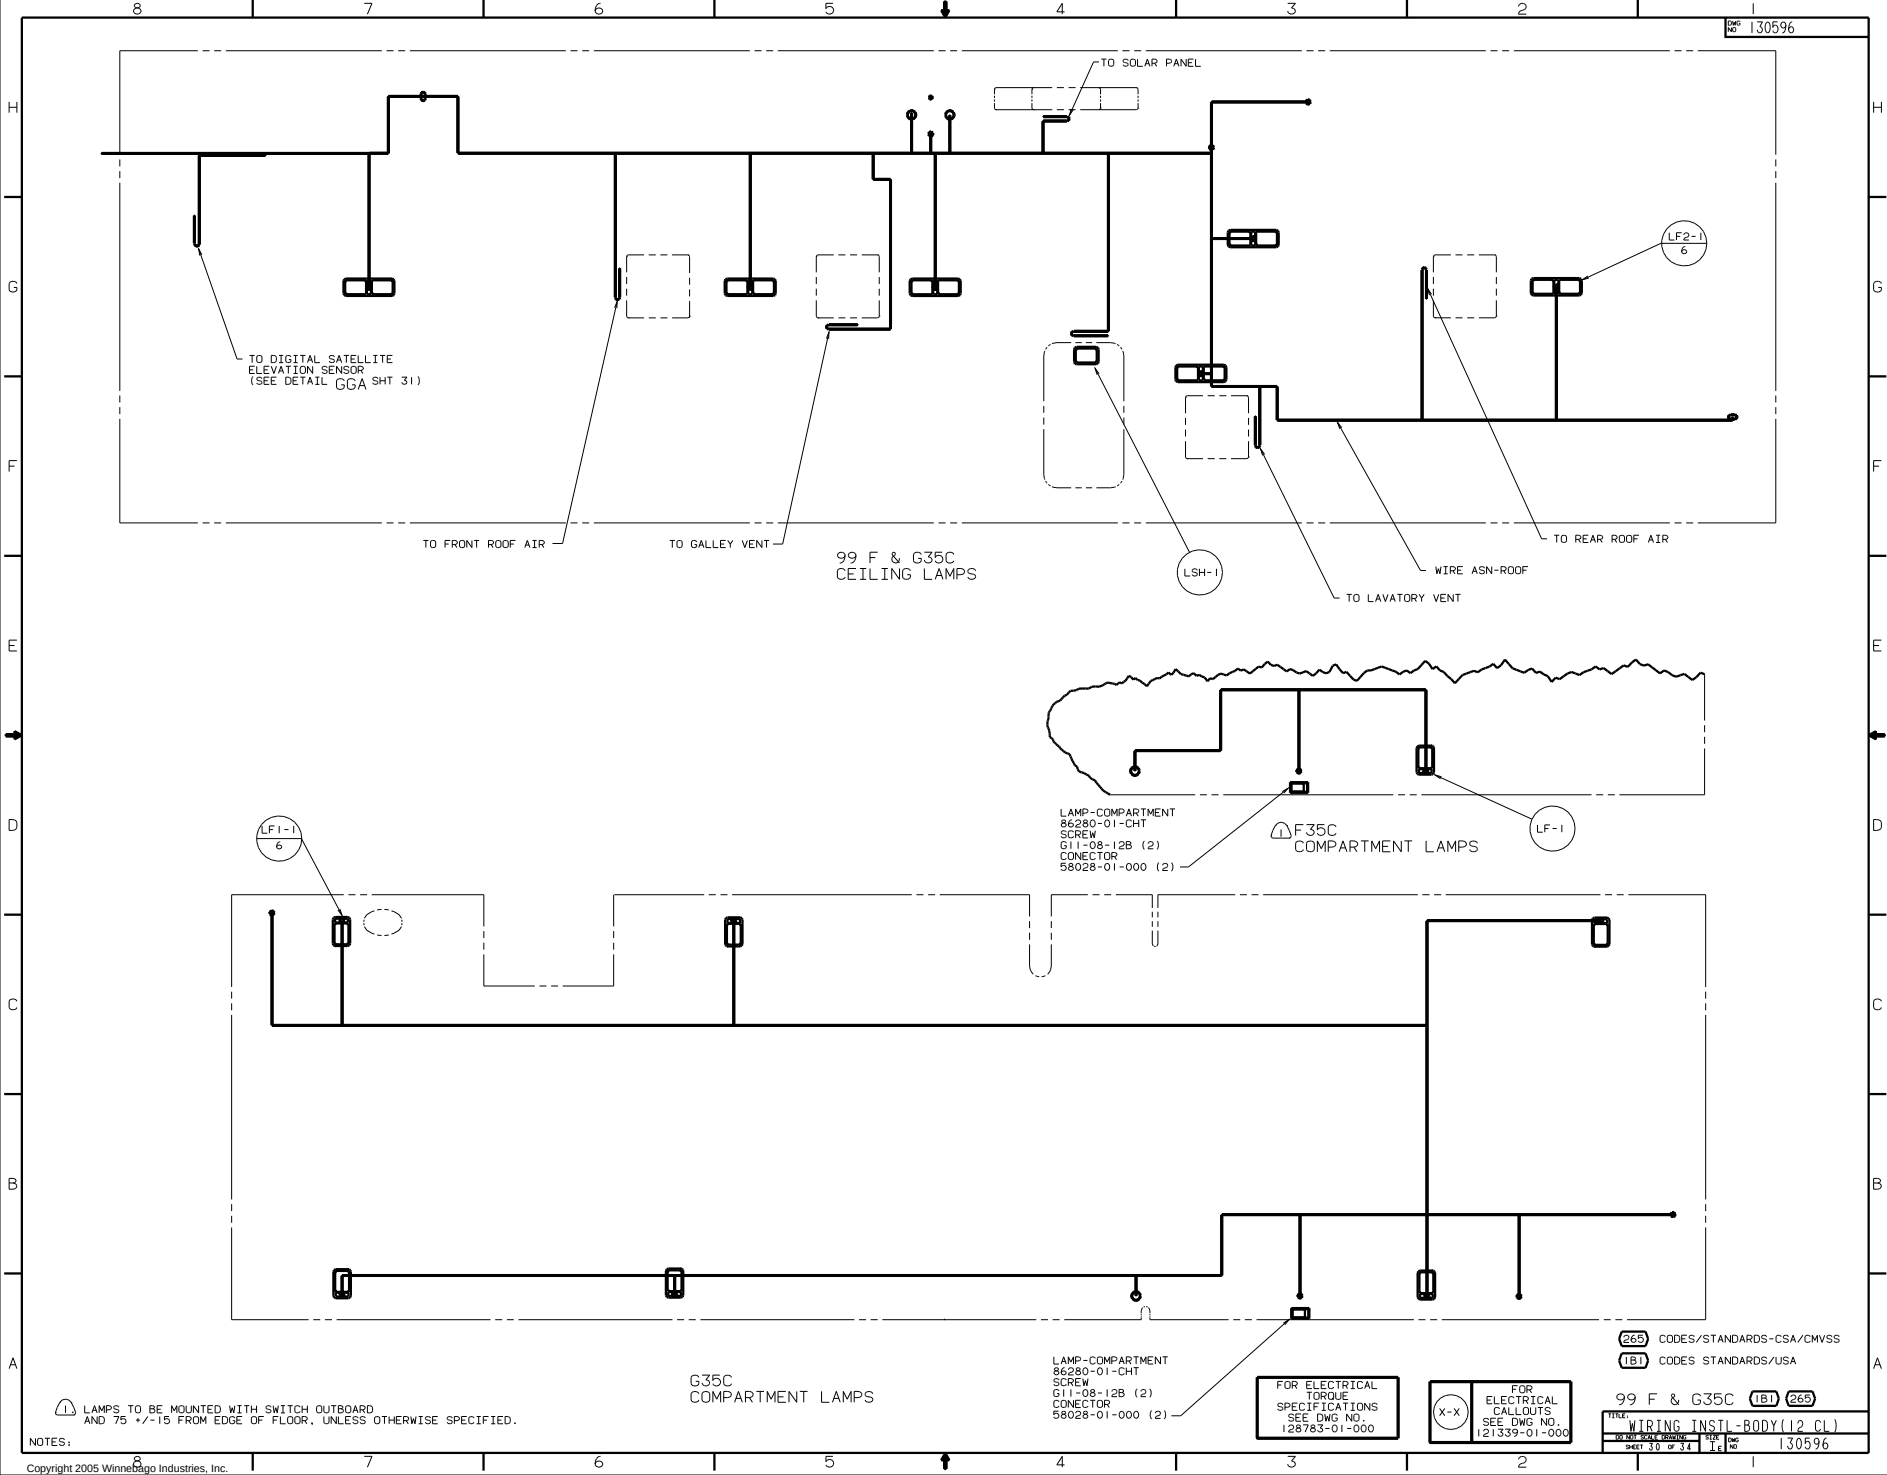

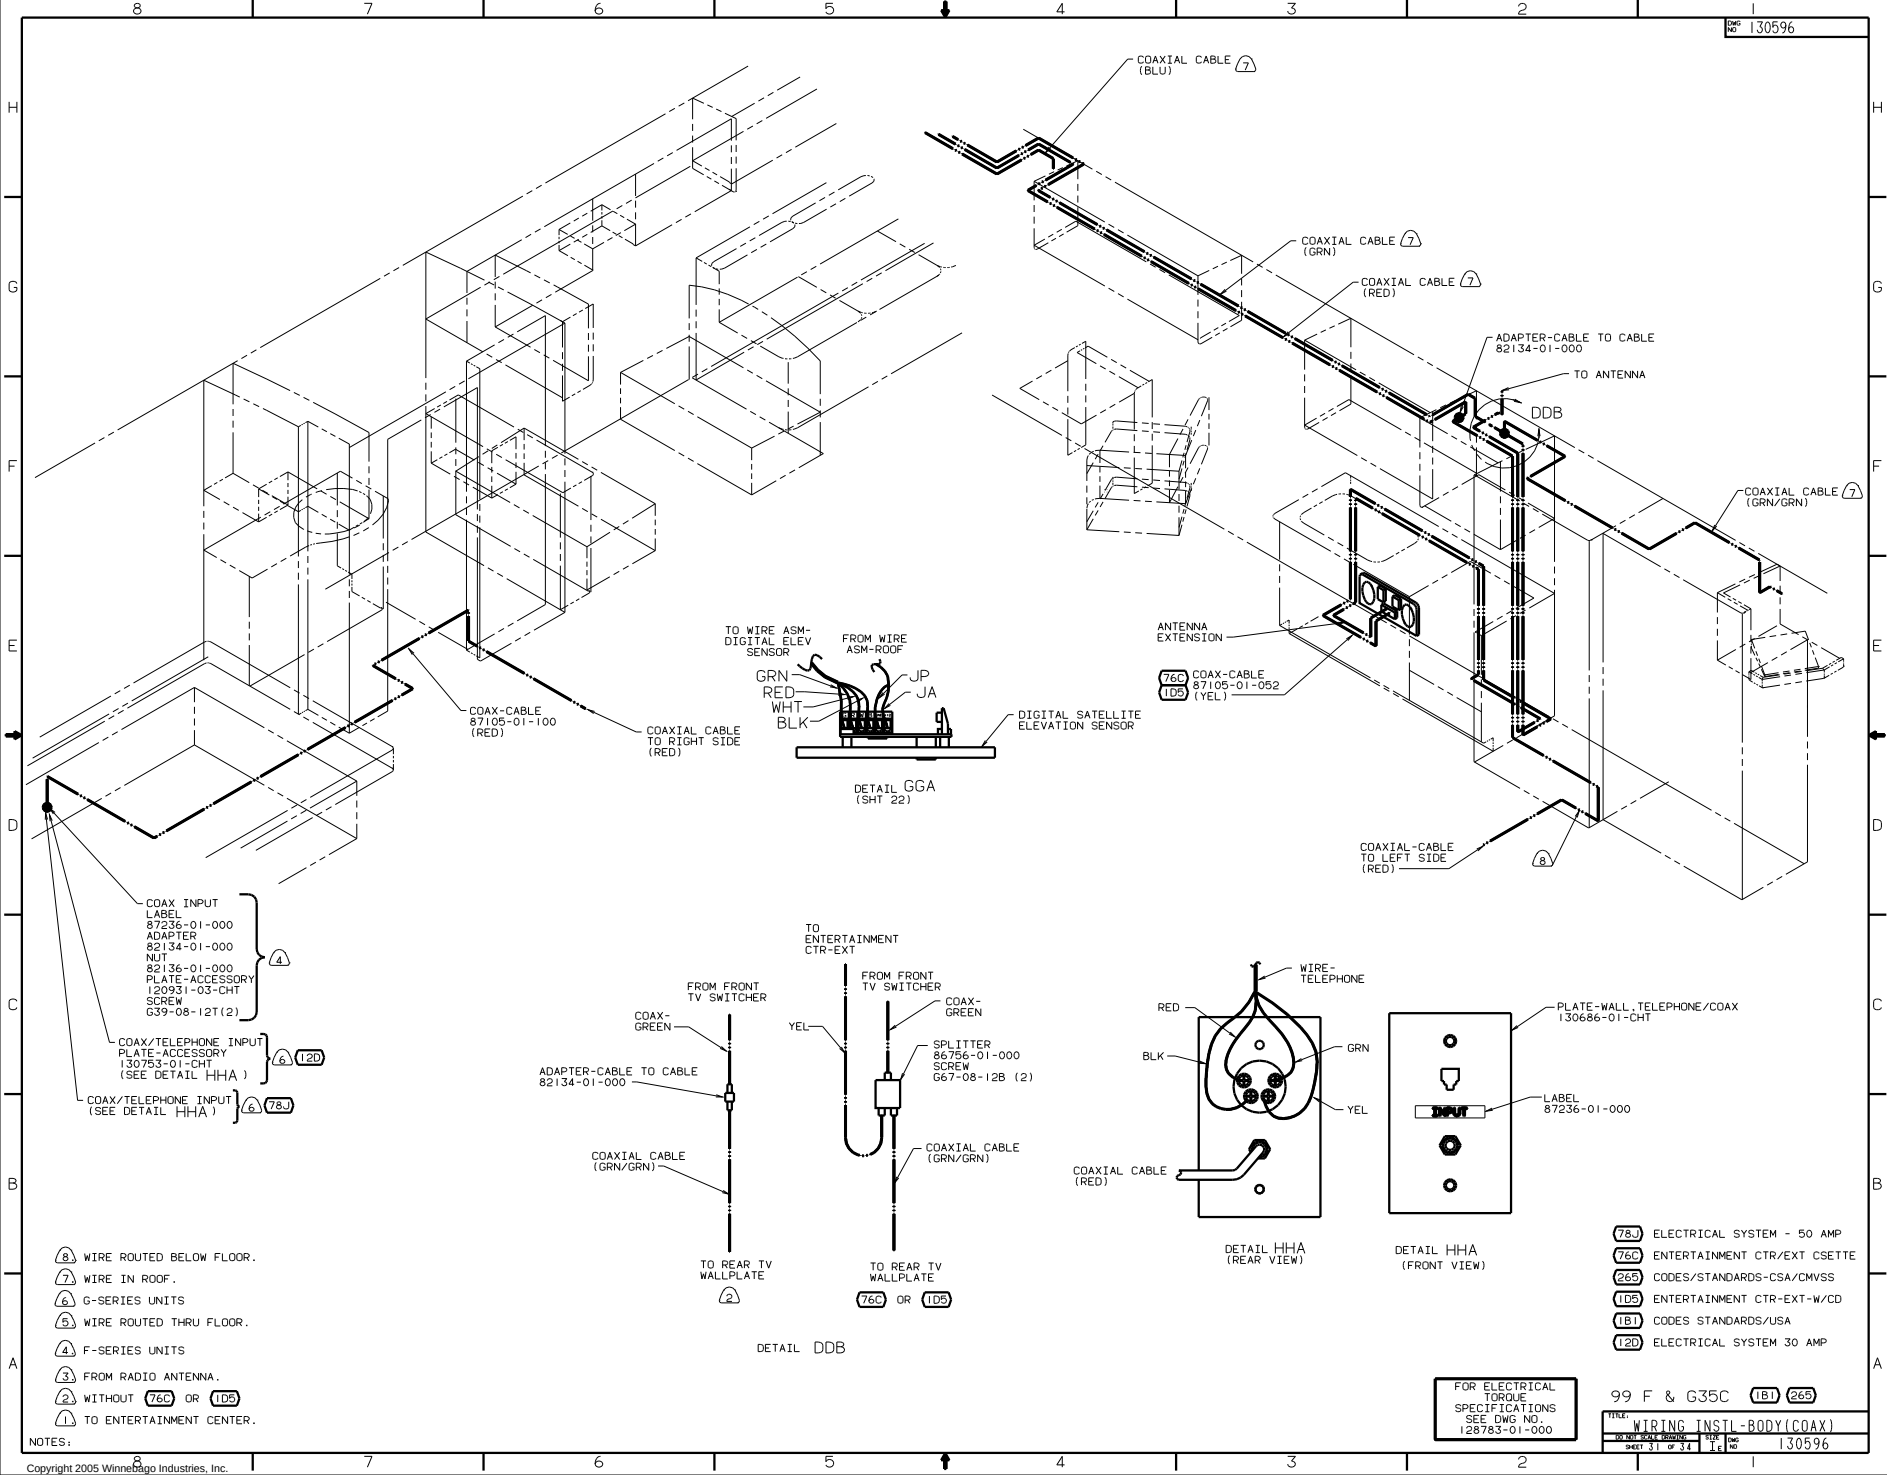

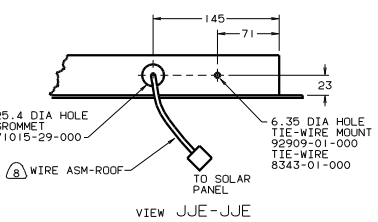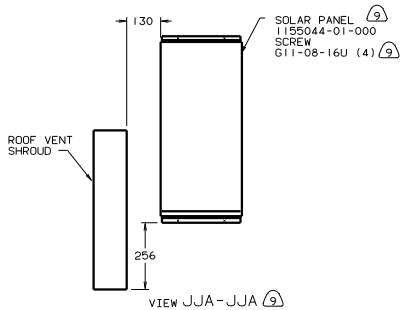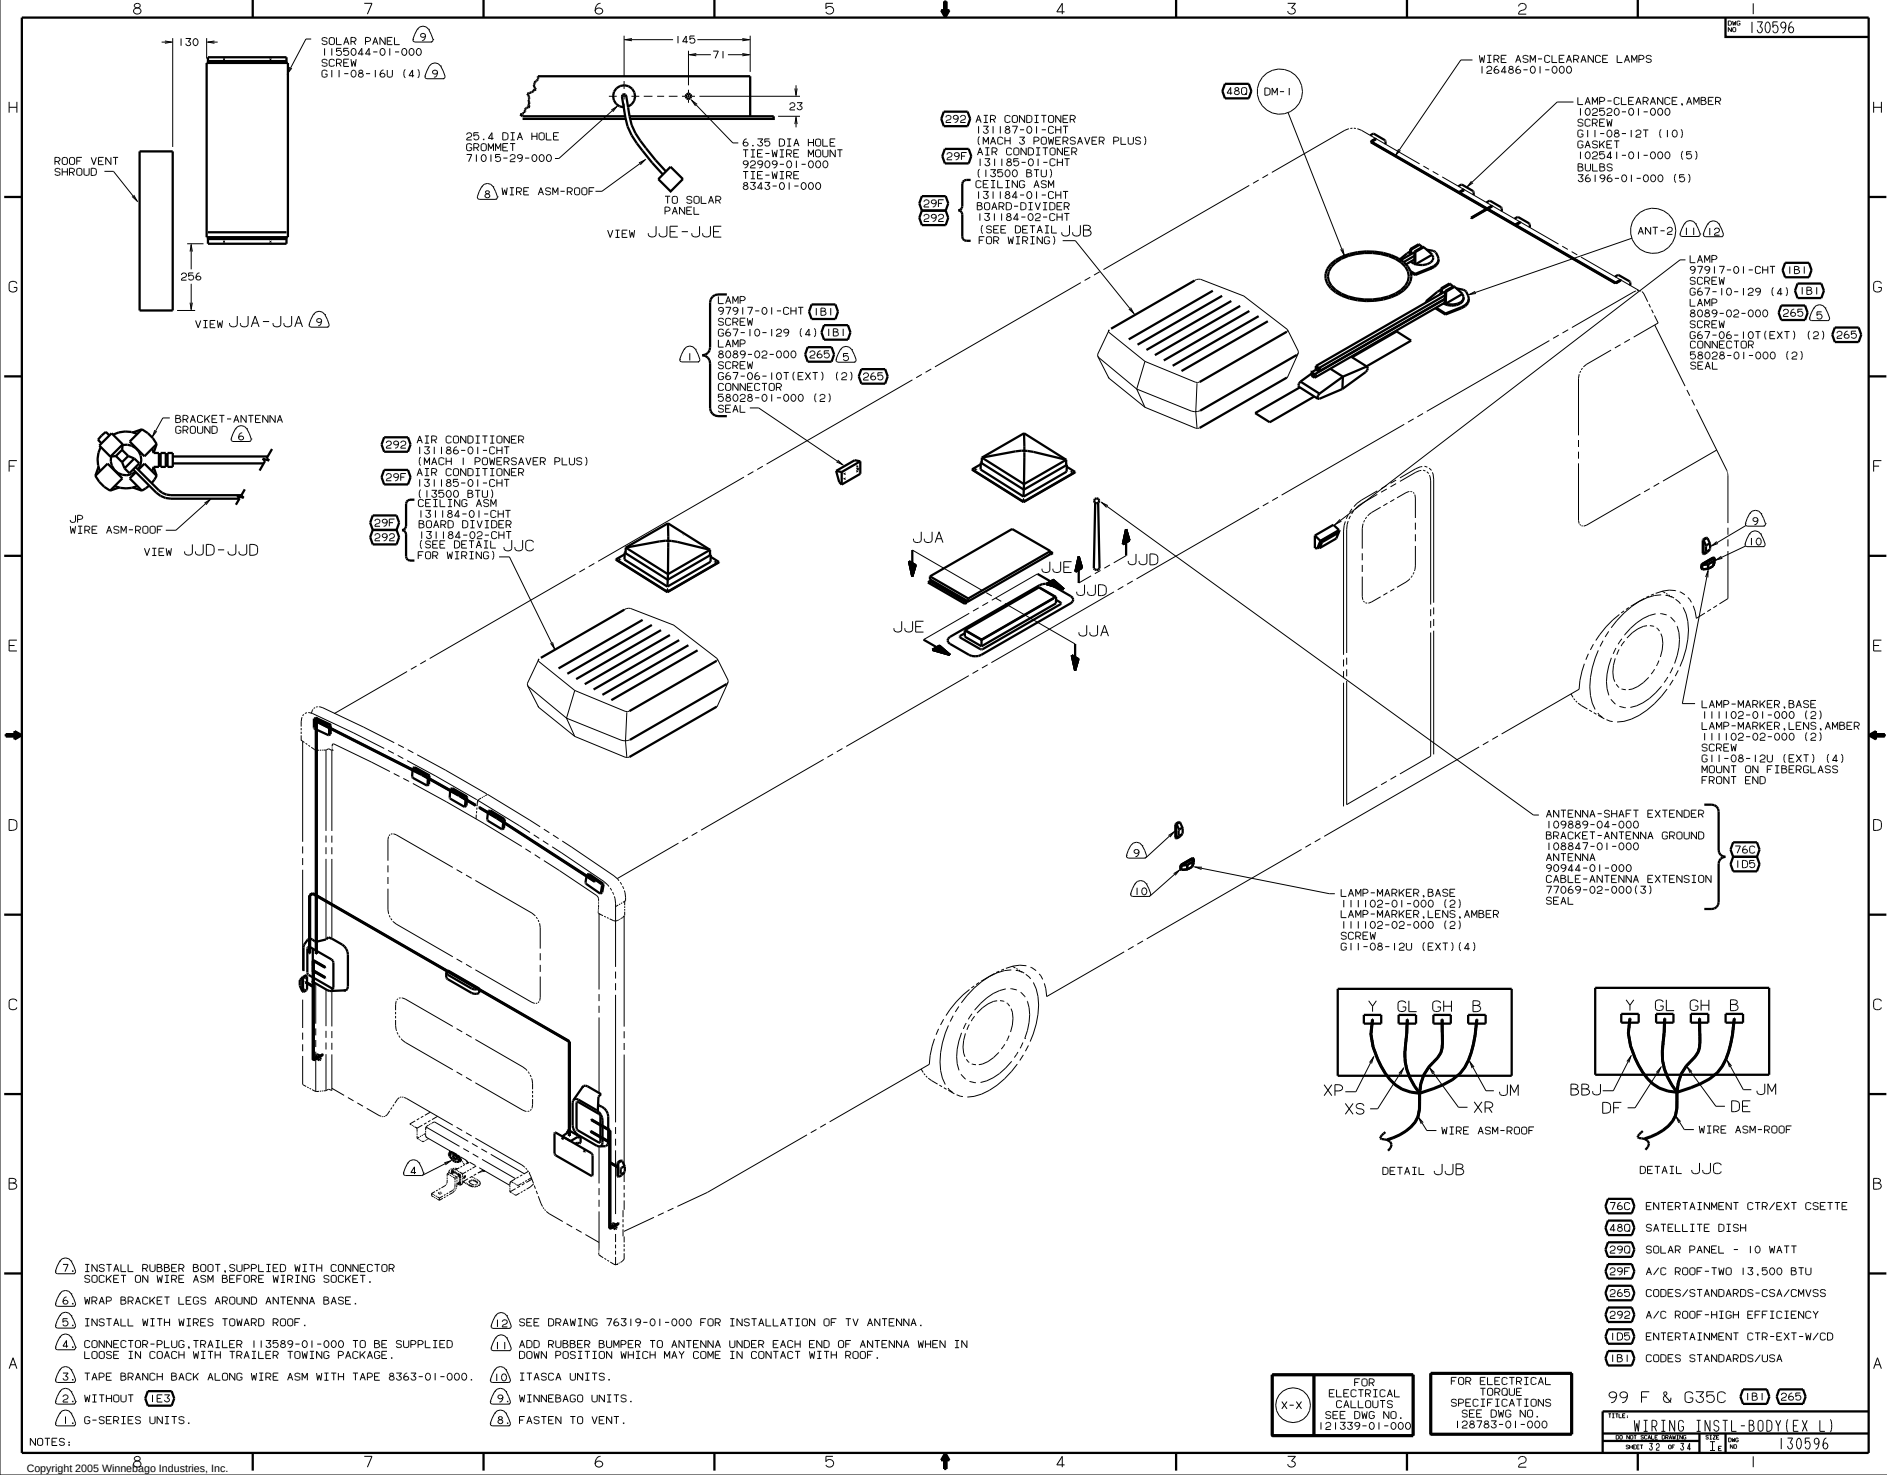

1. INSTALL RUBBER BOOT, SUPPLIED WITH CONNECTOR SOCKET ON WIRE ASM BEFORE WIRING SOCKET.
2. WRAP BRACKET LEGS AROUND ANTENNA BASE.
3. INSTALL WITH WIRES TOWARD ROOF.
4. CONNECTOR-PLUG, TRAILER 113589-01-000 TO BE SUPPLIED LOOSE IN COACH WITH TRAILER TOWING PACKAGE.
3. TAPE BRANCH BACK ALONG WIRE ASM WITH TAPE 8363-01-000.
2. WITHOUT 1E3
1. G-SERIES UNITS.

12. SEE DRAWING 76319-01-000 FOR INSTALLATION OF TV ANTENNA.
11. ADD RUBBER BUMPER TO ANTENNA UNDER EACH END OF ANTENNA WHEN IN DOWN POSITION WHICH MAY COME IN CONTACT WITH ROOF.
10. ITASCA UNITS.
9. WINNEBAGO UNITS.
8. FASTEN TO VENT.

- 76C ENTERTAINMENT CTR/EXT CSETTE
- 48D SATELLITE DISH
- 29D SOLAR PANEL - 10 WATT
- 29F A/C ROOF-TWO 13,500 BTU
- 265 CODES/STANDARDS-CSA/CMVSS
- 292 A/C ROOF-HIGH EFFICIENCY
- 1D5 ENTERTAINMENT CTR-EXT-W/CD
- 1B1 CODES STANDARDS/JUSA

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 126783-01-000


99 F & G35C (1B1) (265)

TITLE: WIRING INSTL-BODY(FX L)



DATE: 11/1/96

SHEET 32 OF 34

130596

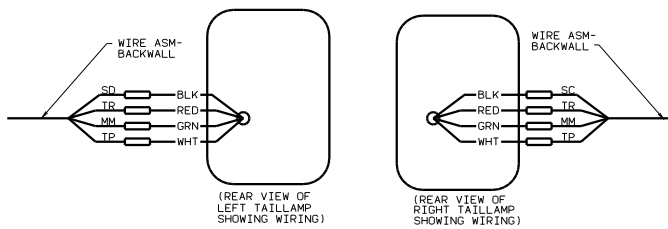




TAILLAMP WIRING

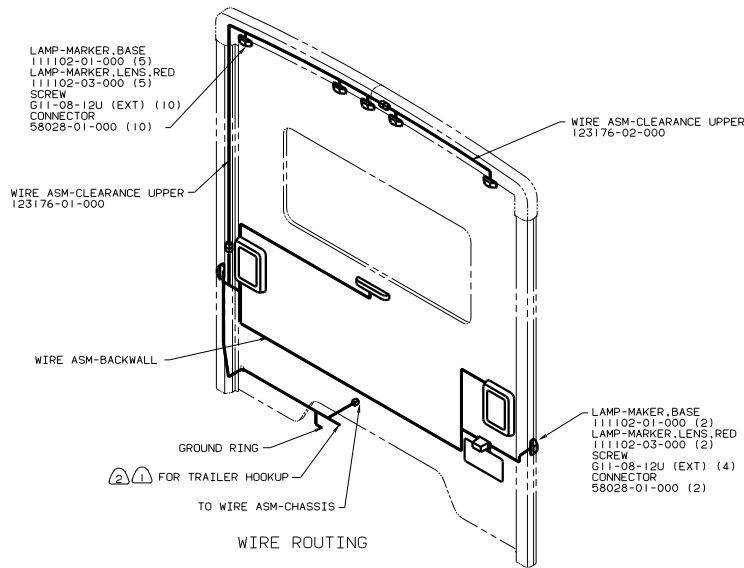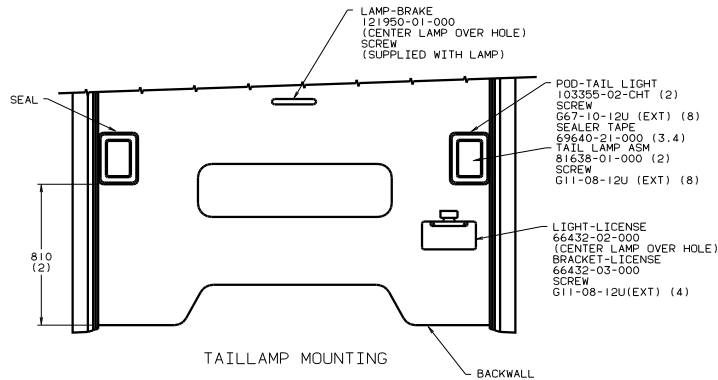

- (2) CONNECTOR-PLUG, TRAILER 113589-01-000 TO BE SUPPLIED LOOSE IN COACH WITH TRAILER TOWING PACKAGE.
- (1) TAPE BRANCH BACK ALONG WIRE ASM WITH TAPE 8363-01-000.

NOTES:

WINNEBAGO

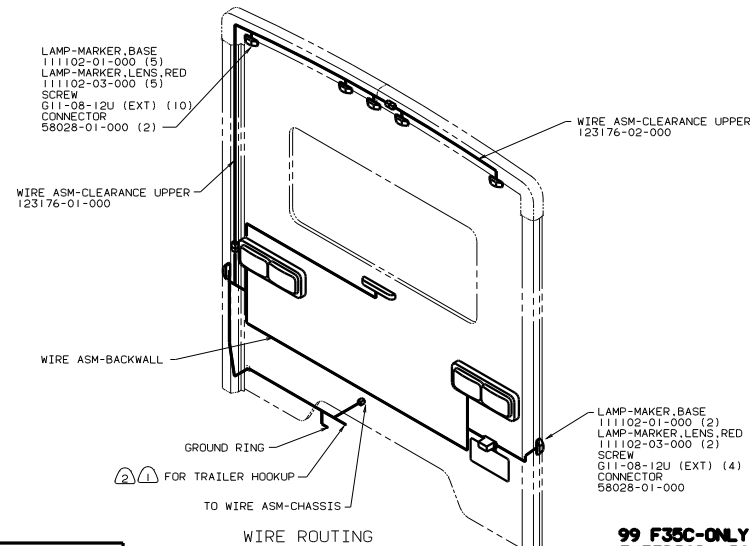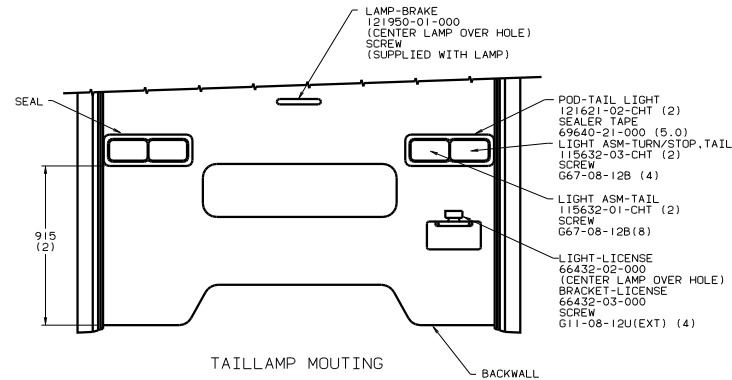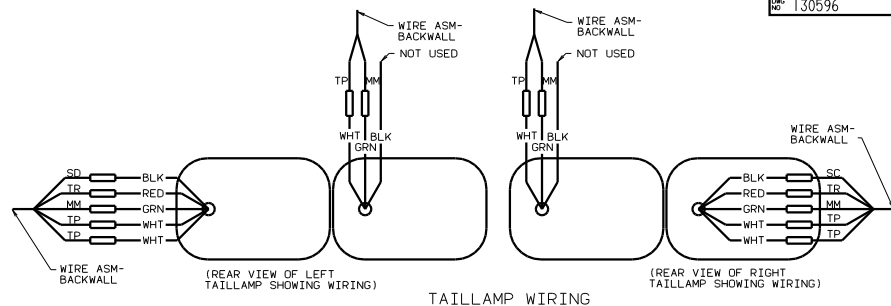


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

ITASCA

99 F35C-ONLY
EXTERIOR LIGHTING
265 CODE STANDARDS-CSA
181 CODE STANDARDS-USA

TITLE: WIRING INSTL-BODY(EX L)
DRAWN BY: J.E. NO. 130596
SHEET 33 OF 34

LAMP ASM-STOP/TURN
TAIL/BACKUP
117831-01-000 RH
117831-02-000 LH
BULB
37934-01-000(2)
37935-01-000(2)
SCREW
G39-10-48T(8)

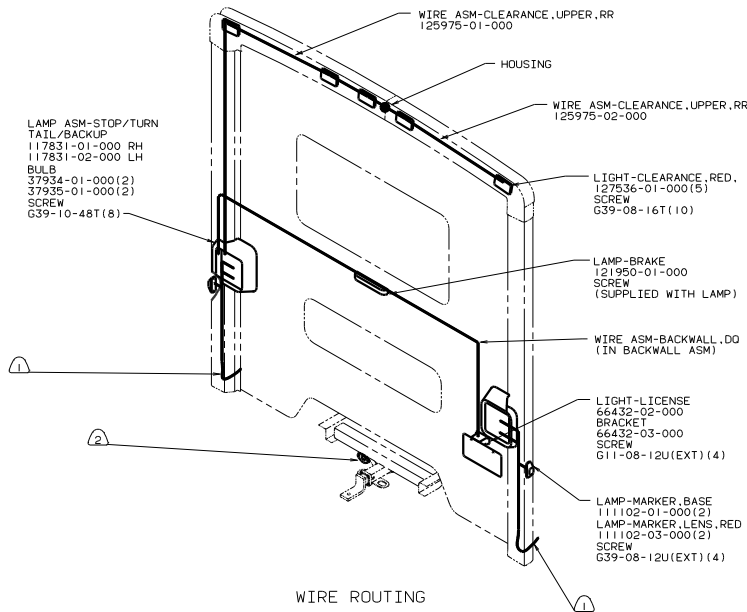


WIRE ROUTING

2 CONNECTOR-PLUG, TRAILER 113589-01-000 TO BE SUPPLIED LOOSE IN COACH WITH TRAILER TOW PACKAGE.

1 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:


WINNEBAGO

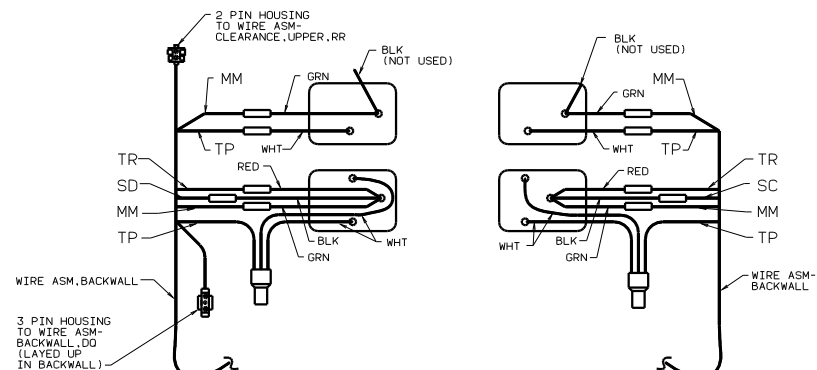

LEFT SIDE

RIGHT SIDE

TAILLAMP WIRING

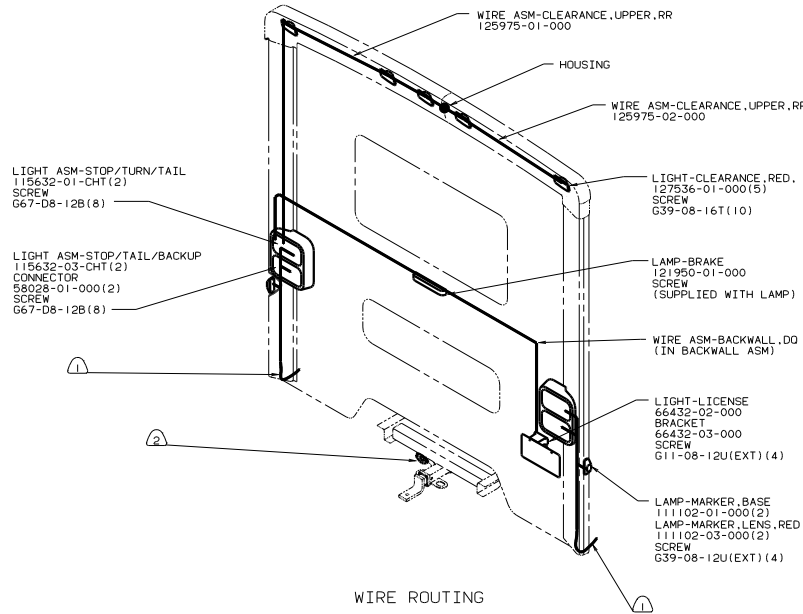

WIRE ROUTING

ITASCA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE OWC NO
128783-01-000

99 G35C-ONLY
EXTERIOR LIGHTING
265 CODE STANDARDS-CSA
1B1 CODE STANDARDS-USA

WIRING INSTL-BODY(FX L)

130596