





DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

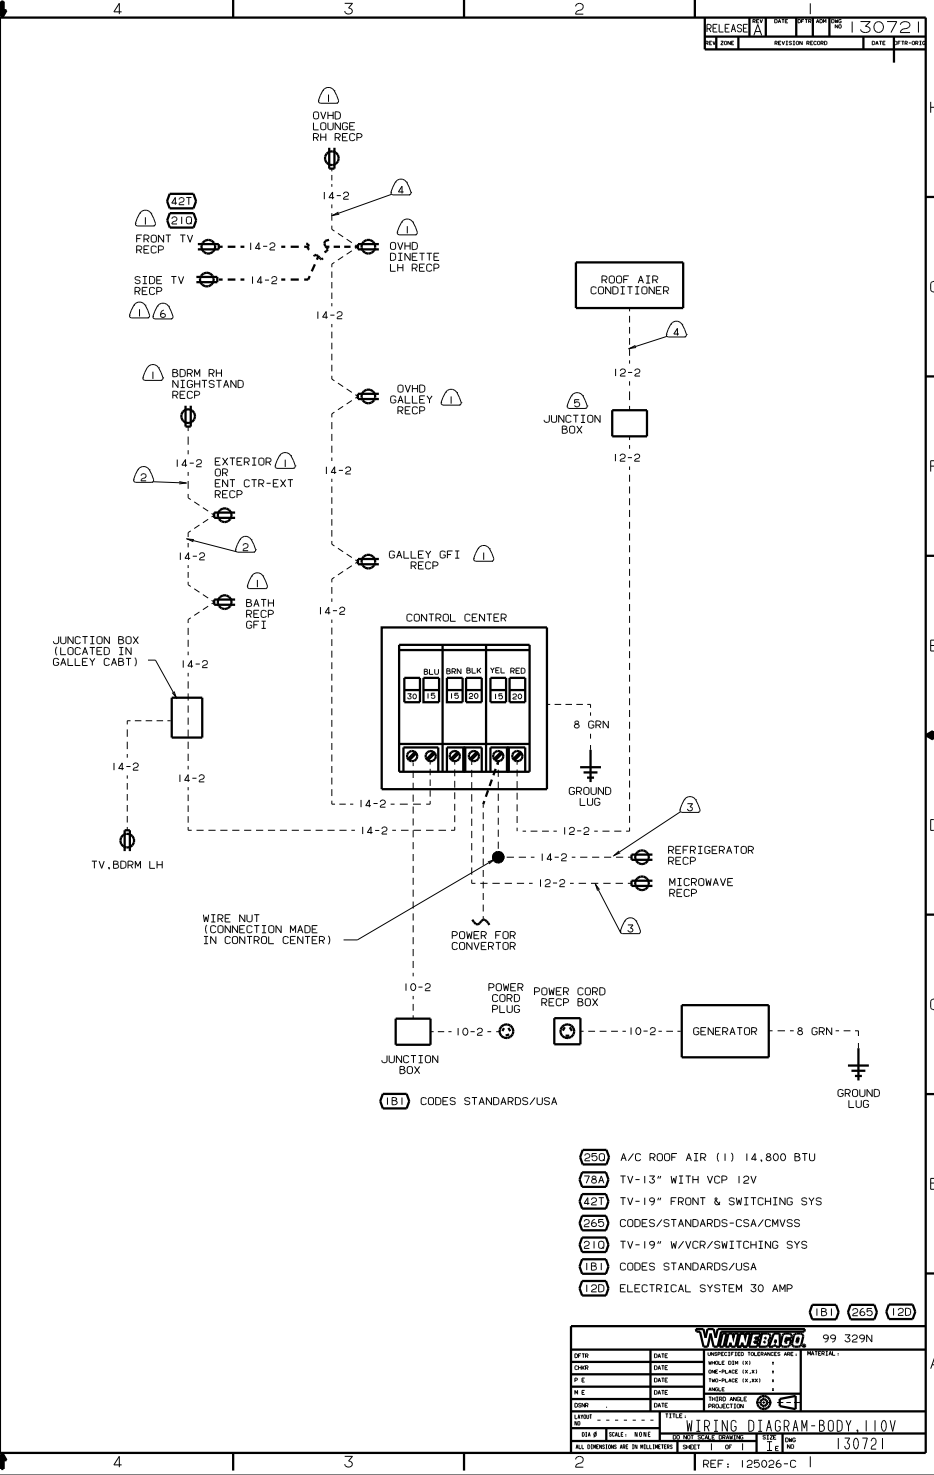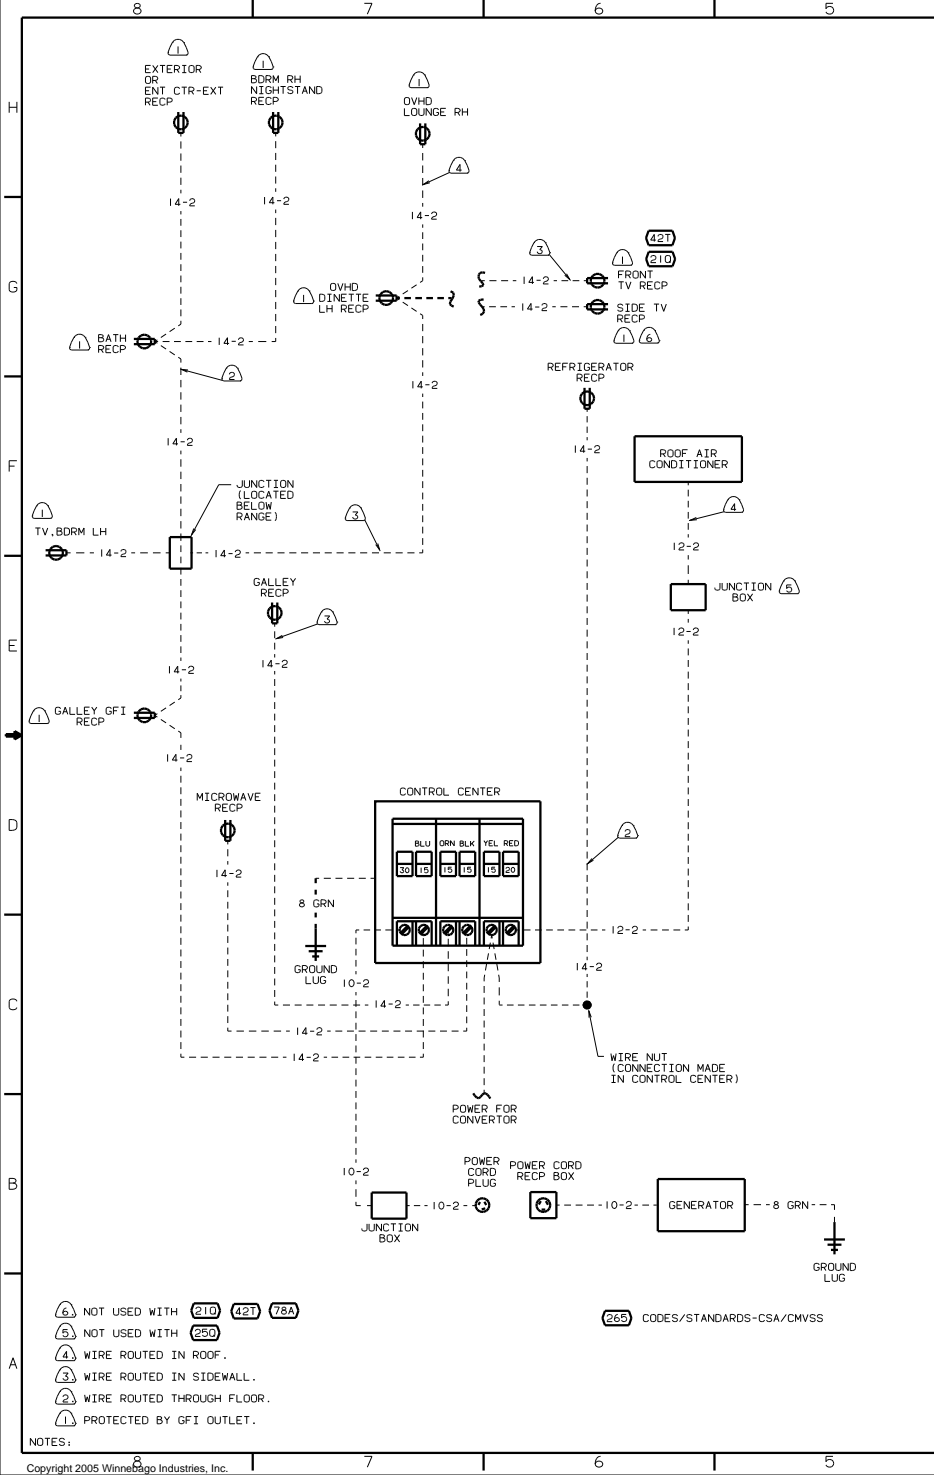

- Ⓜ NOT USED WITH (210) (42T) (78A)
- Ⓝ NOT USED WITH (250)
- Ⓚ WIRE ROUTED IN ROOF.
- Ⓛ WIRE ROUTED IN SIDEWALL.
- Ⓜ WIRE ROUTED THROUGH FLOOR.
- Ⓛ PROTECTED BY GFI OUTLET.

(265) CODES/STANDARDS-CSA/CMVSS

(1B1) CODES STANDARDS/USA

- (250) A/C ROOF AIR (1) 14,800 BTU
- (78A) TV-13" WITH VCP 12V
- (42T) TV-19" FRONT & SWITCHING SYS
- (265) CODES/STANDARDS-CSA/CMVSS
- (210) TV-19" W/VCR/SWITCHING SYS
- (1B1) CODES STANDARDS/USA
- (12D) ELECTRICAL SYSTEM 30 AMP

(1B1) (265) (12D)

WINNEBAGO		99 329N
OF IN	DATE	UNSPECIFIED TOLERANCES ARE:
CHP	DATE	WHOLE OR 1/16"
D/E	DATE	ONE-PLACE (1/32) "
D/E	DATE	TWO-PLACE (1/64) "
CON	DATE	THREE-PLACE (1/128) "
DATE	DATE	INDICATE W/ANGLE
DRAWN BY		TITLE
SCALE		WIRING DIAGRAM-BODY 110V
SHEET		1 OF 1
DATE		130721