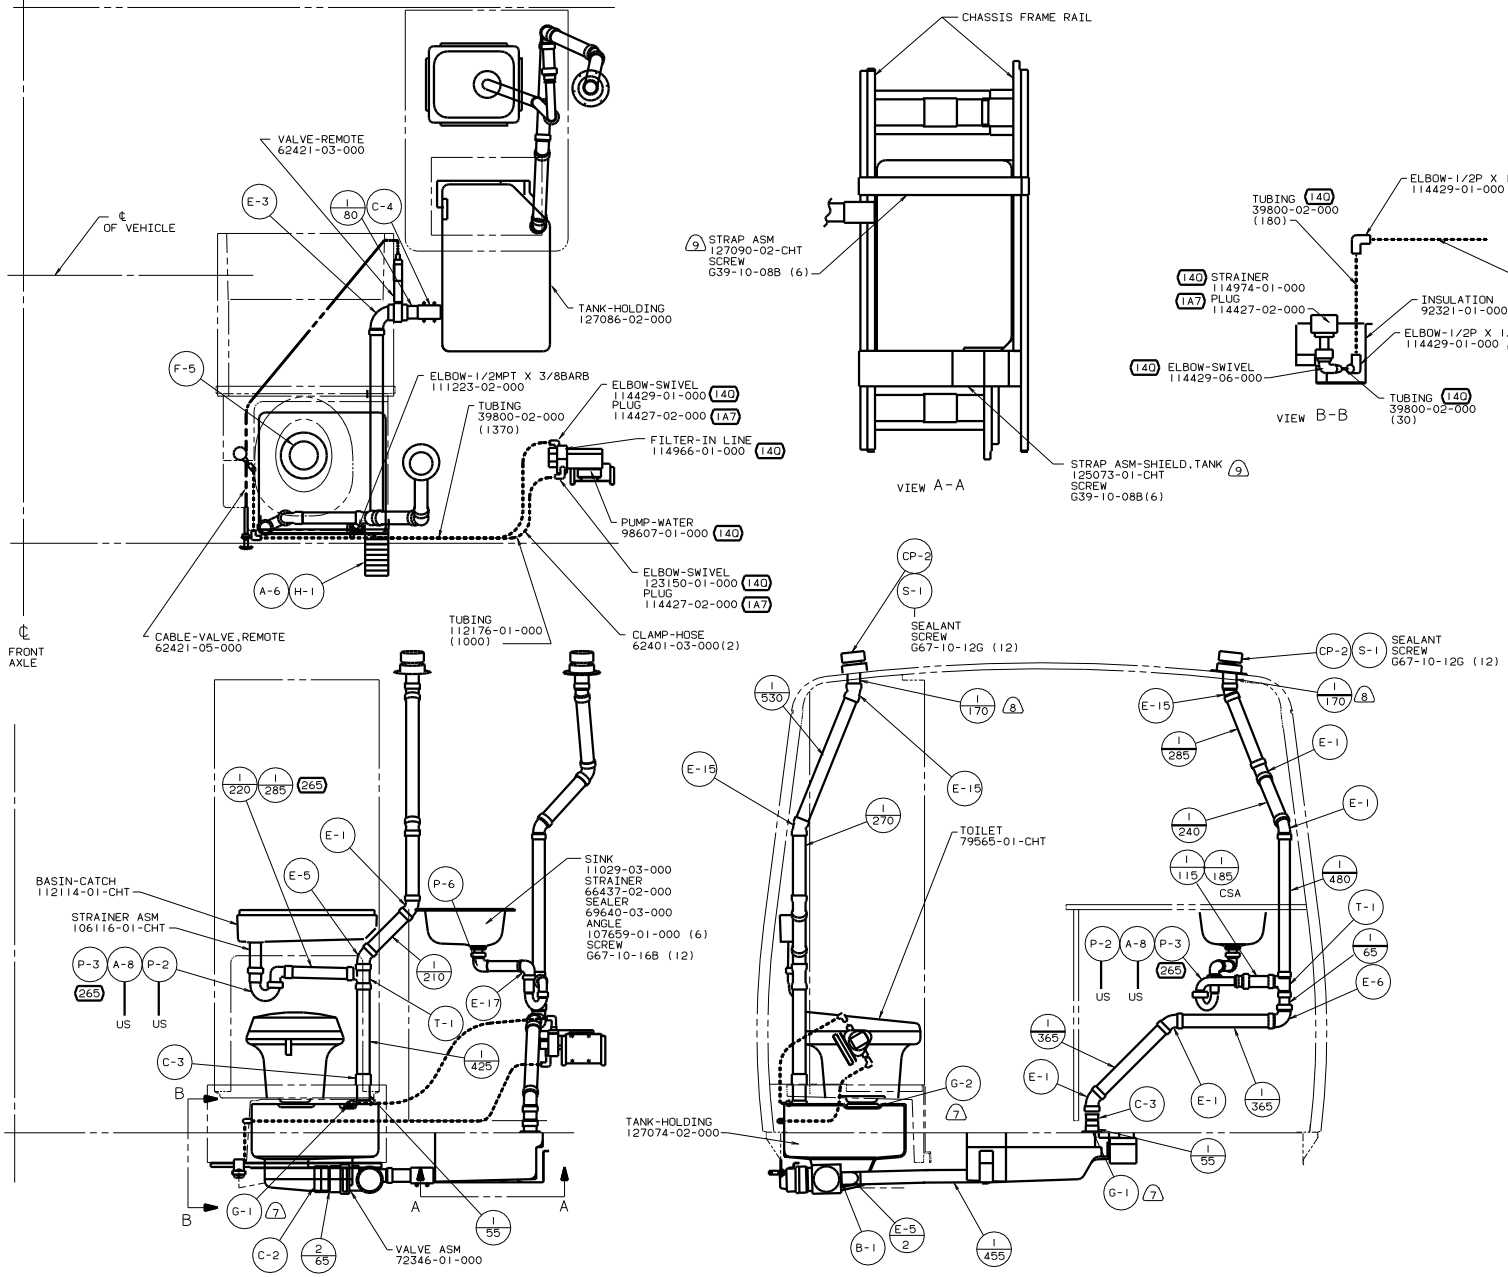

X-X FOR DRAINAGE CALLOUTS SEE DWG NO. 116229-01-000

222 RD US/CANADIAN

(265) CODES/STANDARDS-CSA/CMVSS
(181) CODES STANDARDS/USA
(1A7) SHOWER PACKAGE-WITHOUT
(140) SHOWER PACKAGE

NOTES:

1. SLOPE OF HORIZONTAL PIPING TO BE 6 PER 305 MIN.
2. SLOPE OF TRAP ARM MUST BE 6 PER 305.
3. ALL PIPE AND FITTINGS TO BE ASSEMBLED WITH SOLVENT 4020-01-000.
4. ALL EXTERIOR OPENINGS AROUND PIPE TO BE SEALED WITH 69637-01-000.
5. EXPOSED PIPE ABOVE ROOF TO BE PAINTED 37163-01-000.
6. FOR CAN UNITS EACH HOLDING TANK SHALL HAVE A CSA APPROVAL STAMPED NEAR THE IAMPO APPROVAL.
7. SEE DWG 61607-01-000 FOR INSTALLATION OF GROMMET.
8. VENT PIPE MUST PROJECT 51 MIN AND 63.5 MAX ABOVE ROOF FOR PROPER FIT AND FUNCTION.
9. USE SCRAP CLOSED CELL NEOPRENE FROM 77075-01,-02 OR -03 ON HAT CHANNELS FOR VIBRATION DAMPENING.
10. SECURE PIPES TO CABINET USING WIRE TIE 108046-02-000 AND SCREW G67-10-12U (8).

WINNEBAGO 99 2220D

DFTR	DATE	UNSPECIFIED TOLERANCES ARE:
CHKR	DATE	WHOLE DIM (X) ± 3
P E	DATE	ONE-PLACE (X.X) ±
M E	DATE	TWO-PLACE (X.XX) ±
DSNR	DATE	ANGLE ±
		THIRD ANGLE PROJECTION

MATERIAL:

LAYOUT NO. 200GEN
TITLE: DRAINAGE SYSTEM INSTL
DIA Ø | SCALE: NONE | DO NOT SCALE DRAWING | SIZE B | DWG NO 131308
ALL DIMENSIONS ARE IN MILLIMETERS | SHEET 1 OF 1

Copyright 2005 Winnebago Industries, Inc.

REF: 126888 H 1

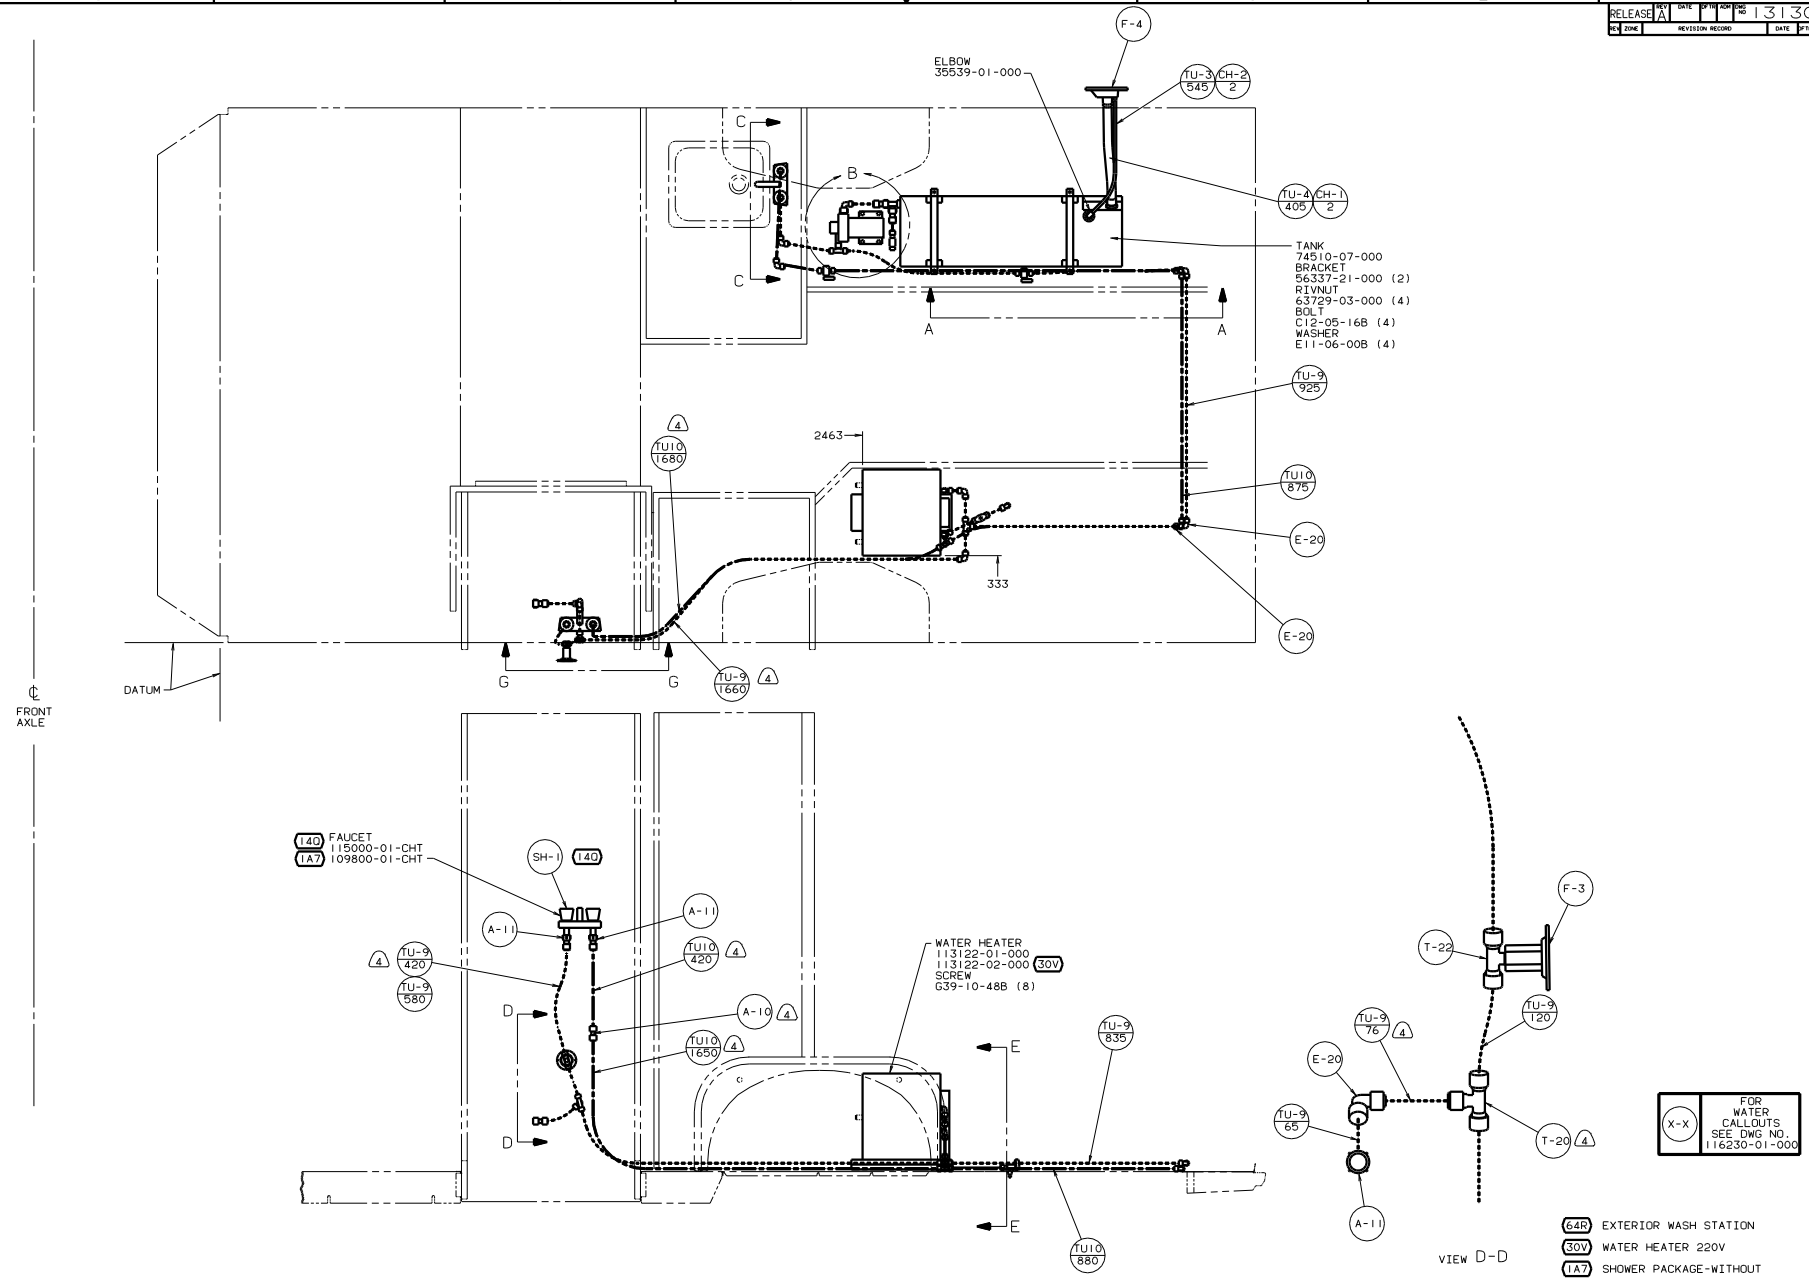

Copyright 2005 Winnebago Industries, Inc.

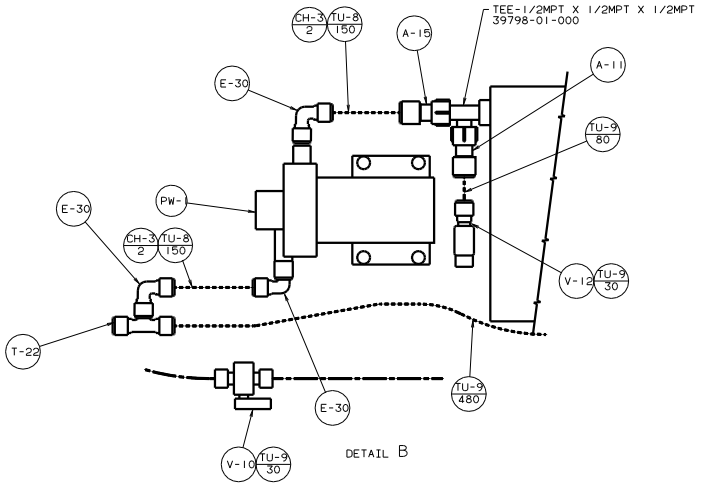

DETAIL B

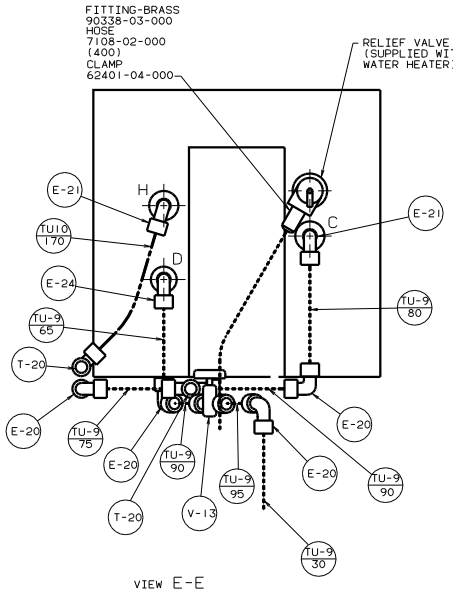

VIEW E-E



VIEW F-F

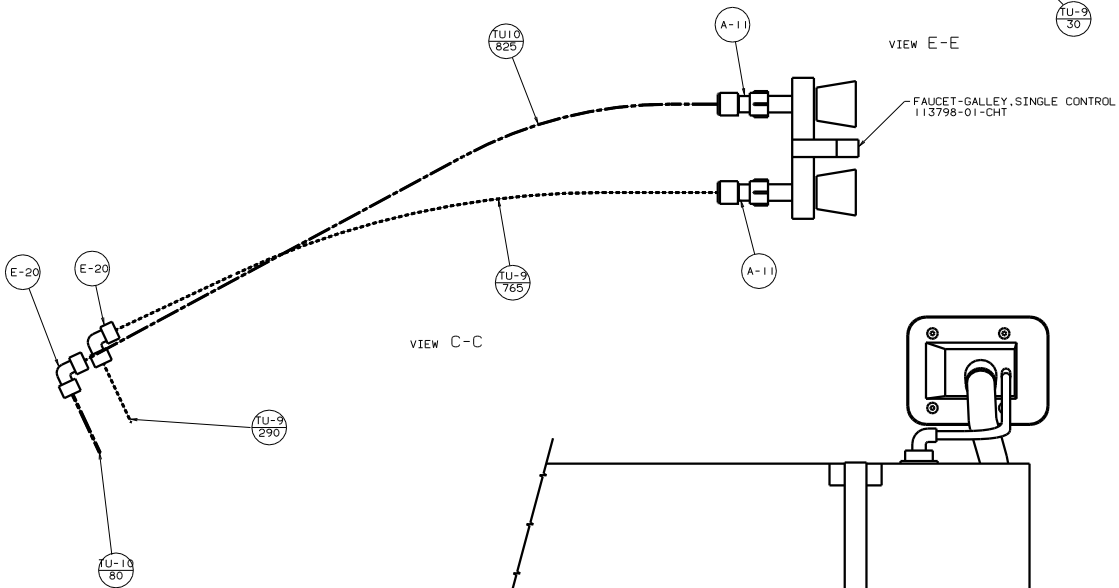

VIEW C-C

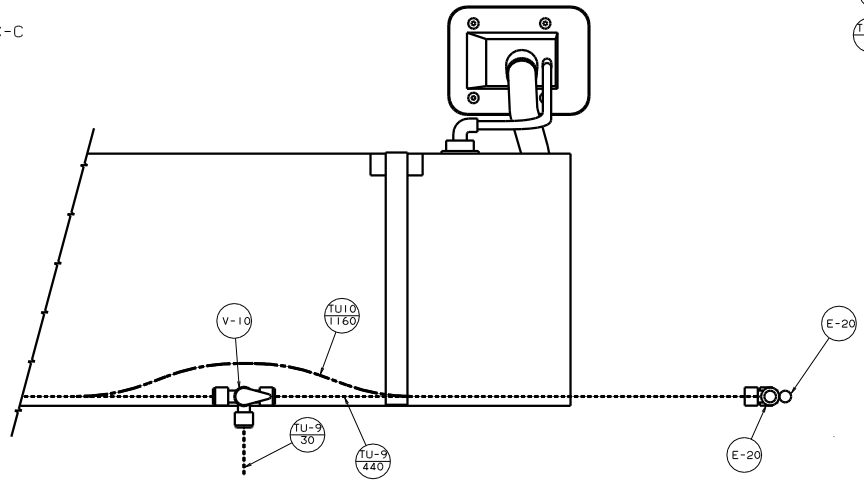

VIEW A-A

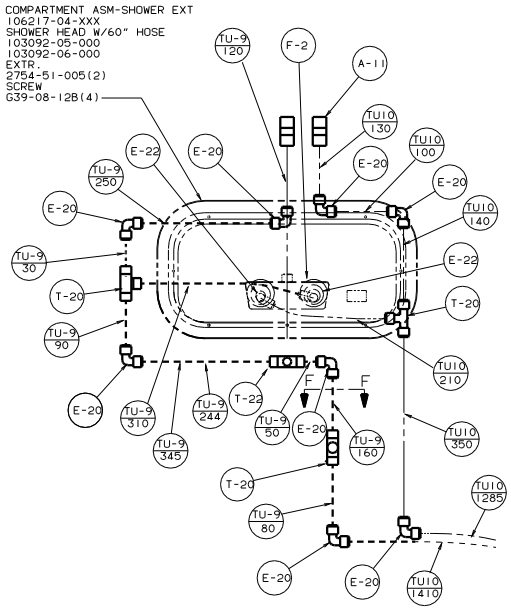

VIEW G-G (64R)

99 2220D
(AND JAPANESE)

TITLE: WATER SYSTEM INSTL
DO NOT SCALE DRAWING
SHEET 2 OF 2
SIZE D
DWG NO 131309

Copyright 2005 Winnebago Industries, Inc.