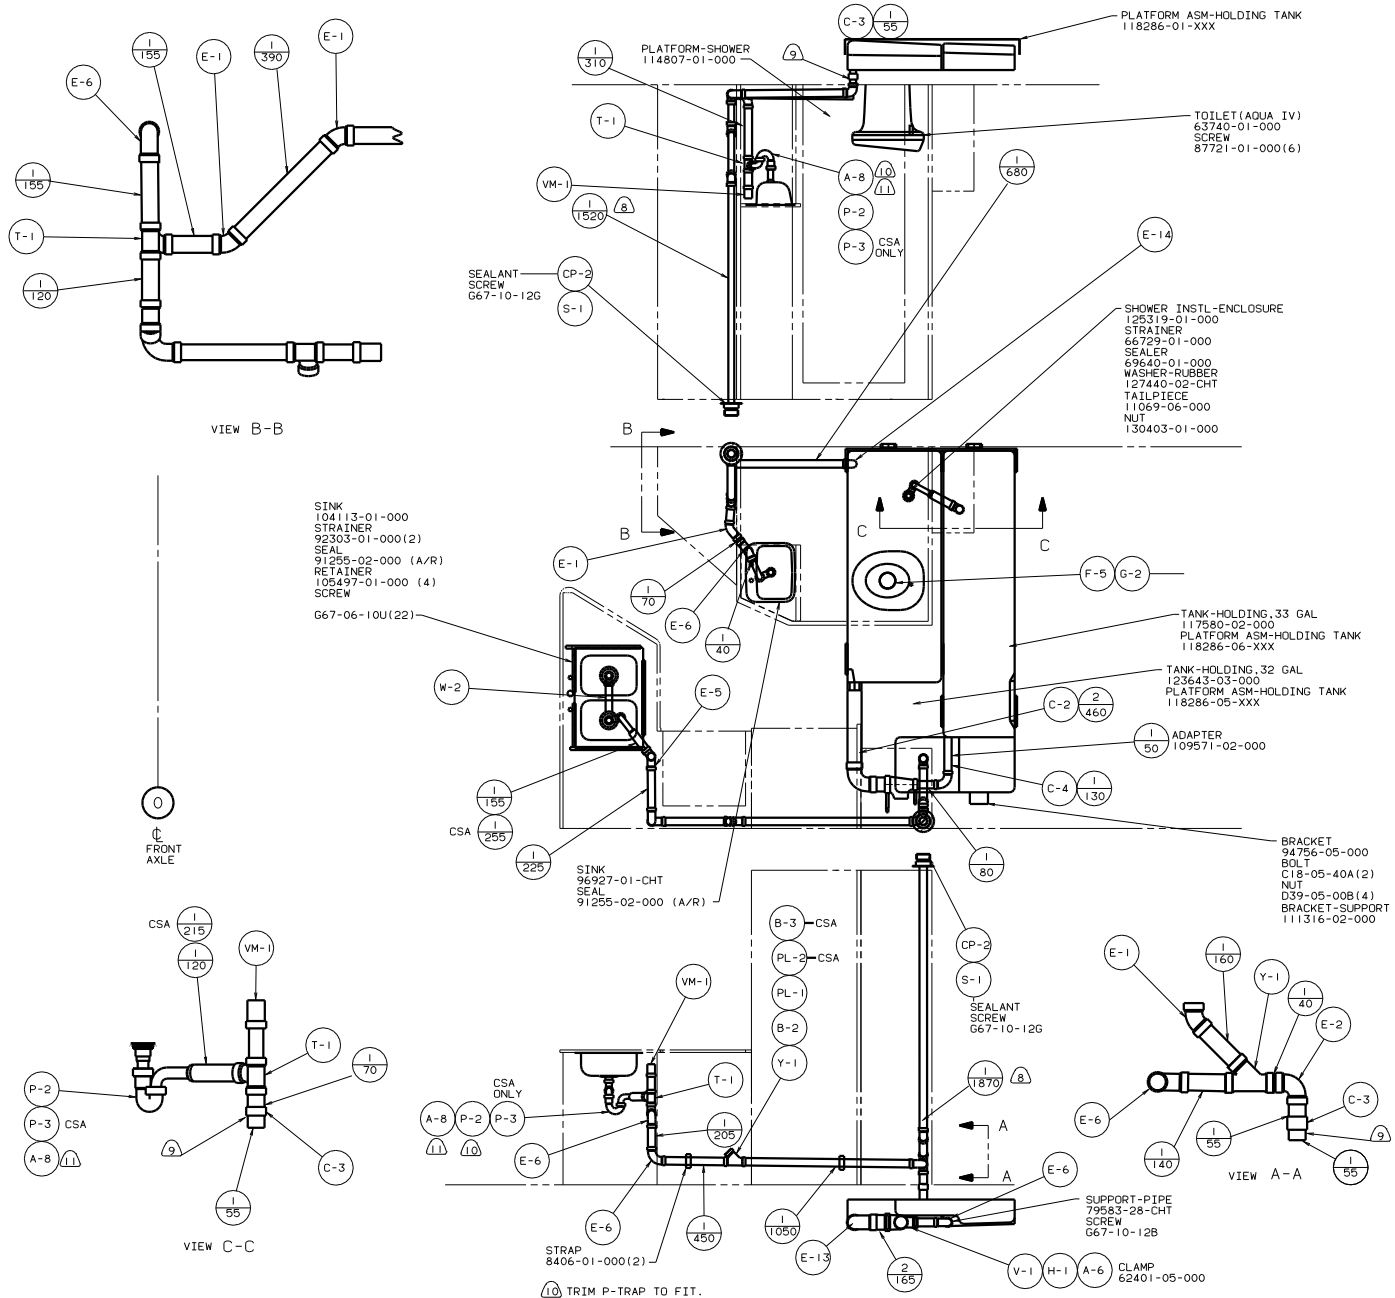

RELEASE A

FOR DRAINAGE CALLOUTS SEE DWG NO. 116229-01-000

NOTES:

1. SLOPE OF HORIZONTAL PIPING TO BE 6 PER 305 MIN.
2. SLOPE OF TRAP ARM MUST BE 6 PER 305.
3. ALL PIPE AND FITTINGS TO BE ASSEMBLED WITH SOLVENT 4020-01-000.
4. ALL EXTERIOR OPENINGS AROUND PIPE TO BE SEALED WITH 110744-01-000.
5. FOR CAN UNITS EACH HOLDING TANK SHALL HAVE A CSA APPROVAL STAMPED NEAR THE IAMPO APPROVAL.
6. SEAL ALL AROUND SHOWER WITH SILICONE.
7. SEE DWG 61607-01-000 FOR INSTL OF GROMMETS.
8. VENT PIPE MUST PROJECT 51 MM MIN AND 63.5 MM MAX ABOVE ROOF FOR PROPER FIT AND FUNCTION.
9. SECURE VENT TUBES TO FLOOR WITH BRACKET 95061-01-000(2),CLAMP 62401-02-000, SCREW G67-10-12B(2).
10. TRIM P-TRAP TO FIT.
11. NOT USED ON CANADIAN UNITS.

WINNEBAGO 96 429WU

DRAINAGE SYSTEM INSTL

LAYOUT NO. 429WU6 | DWG NO 118444 | REF: 114784

Copyright 2005 Winnebago Industries, Inc.

6. USE WITHOUT MOTOR AID.
5. USE WITH EXTERIOR SHOWER.
4. USE WITH MOTOR AID.
3. ALL TUBING TO BE SECURED AT 1200 INTERVALS MAX WITH CLAMP 10495-01-000 OR CLIP 91951-01-000 AND SCREW G67-10-12B.
2. TUBING TO BE INSTALLED WITH SUFFICIENT SLOPE TO PROVIDE DRAINAGE TO NEAREST VALVE.
1. PLASTIC FITTINGS TO BE SEALED WITH SEALANT 84456-01-000.

NOTES:

Copyright 2005 Winnebago Industries, Inc.

DWG NO 123097

WATER HEATER
51391-01-000
(MANUAL IGNITION)
51391-02-000
(ELECTRONIC IGNITION)
51391-03-000
(W/MOTOR AID)
DOOR
78506-01-CHT
AL EXTR
2726-01-210
2726-01-212(2)
SCREW
G39-10-169(18)
SEALANT

TO GALLEY

TO SHOWER

TO LAVATORY

VIEW A-A

TO CITY FILL

DETAIL B

BRACKET-SUPPORT,FAUCET
118928-01-CHT

DETAIL C

97 429WU

TITLE: WATER SYSTEM INSTL
DO NOT SCALE DRAWING
SHEET 2 OF 2
SIZE B
DWG NO 123097

Copyright 2005 Winnebago Industries, Inc.