


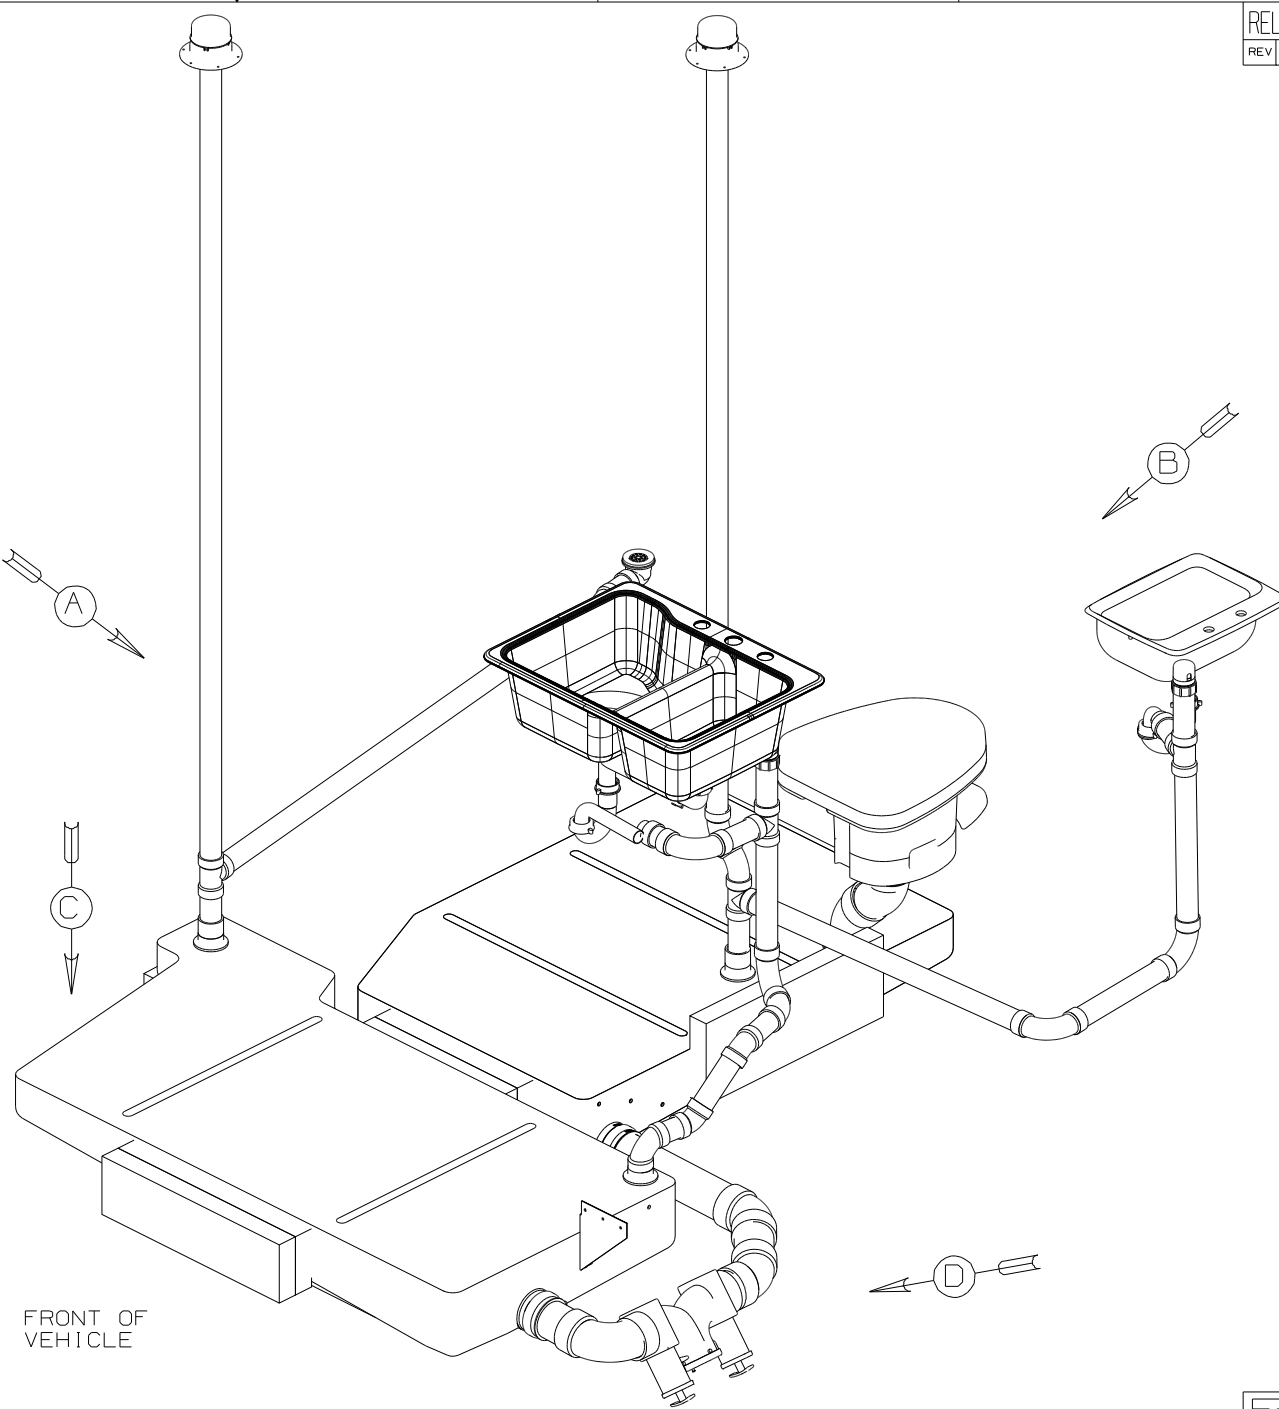

9. SECURE VENT TUBES TO FLOOR WITH BRACKET 95061-01-000 (2), CLAMP 62401-02-000 AND SCREW G67-10-12B (2).
8. VENT PIPE MUST PROJECT 51 MM MIN AND 64 MM MAX ABOVE ROOF FOR PROPER FIT AND FUNCTION.
7. SEAL ALL AROUND SHOWER WITH SILICONE.
6. SEE DRAWING 61607-01-000 FOR INSTL OF GROMMETS.
5. SECURE PIPES TO CABINET USING WIRE TIE 108046-02-000 AND SCREW G67-10-12B (8).
4. ALL EXTERIOR OPENINGS AROUND PIPE TO BE SEALED WITH 110744-01-000.
3. ALL PIPE AND FITTINGS TO BE ASSEMBLED WITH SOLVENT 4020-01-000 (US), 4020-02-000 (CAN).
2. SLOPE OF TRAP ARM MUST BE 6 PER 305.
1. SLOPE OF HORIZONTAL PIPING TO BE 6 PER 305 MIN.


NOTES:

WINNEBAGO		COPYRIGHT 2004 WINNEBAGO INDUSTRIES, INC.	
DFTR	ORIG. DATE		
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS		
P.E.	FIRST USED		
M.E.	04 430V		
DSNR	UNSPECIFIED TOLERANCES ARE:		
WHOLE DIM (X)		1	
ONE-PLACE (X,X)		1.5	
TWO-PLACE (X,XX)		0.50	
ANGLE		1°	
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: DRAINAGE SYSTEM INSTL			
SHEET 1 OF 3		PART NO 146238	


SEE CHART
FOR COLOR VARIATIONS
OF THIS PART

SINK-SMC,DBL L/S BASIN
148870-01-CHT (US/CAN)
STRAINER
92303-01-000 (2)
BRACKET-ZEE
140002-01-CHT (10)
SCREW
G67-06-10U (10)
WASHER-RUBBER
127440-02-CHT (2)
SEAL (A/R)


SHOWER INSTL-ENCLOSURE
147874-02-000
STRAINER
66440-01-000
SEALER
69640-01-000
NUT
130403-01-000
WASHER-RUBBER
127440-02-CHT
TAILPIECE
11069-02-000
ELBOW-DRAIN
131486-01-000

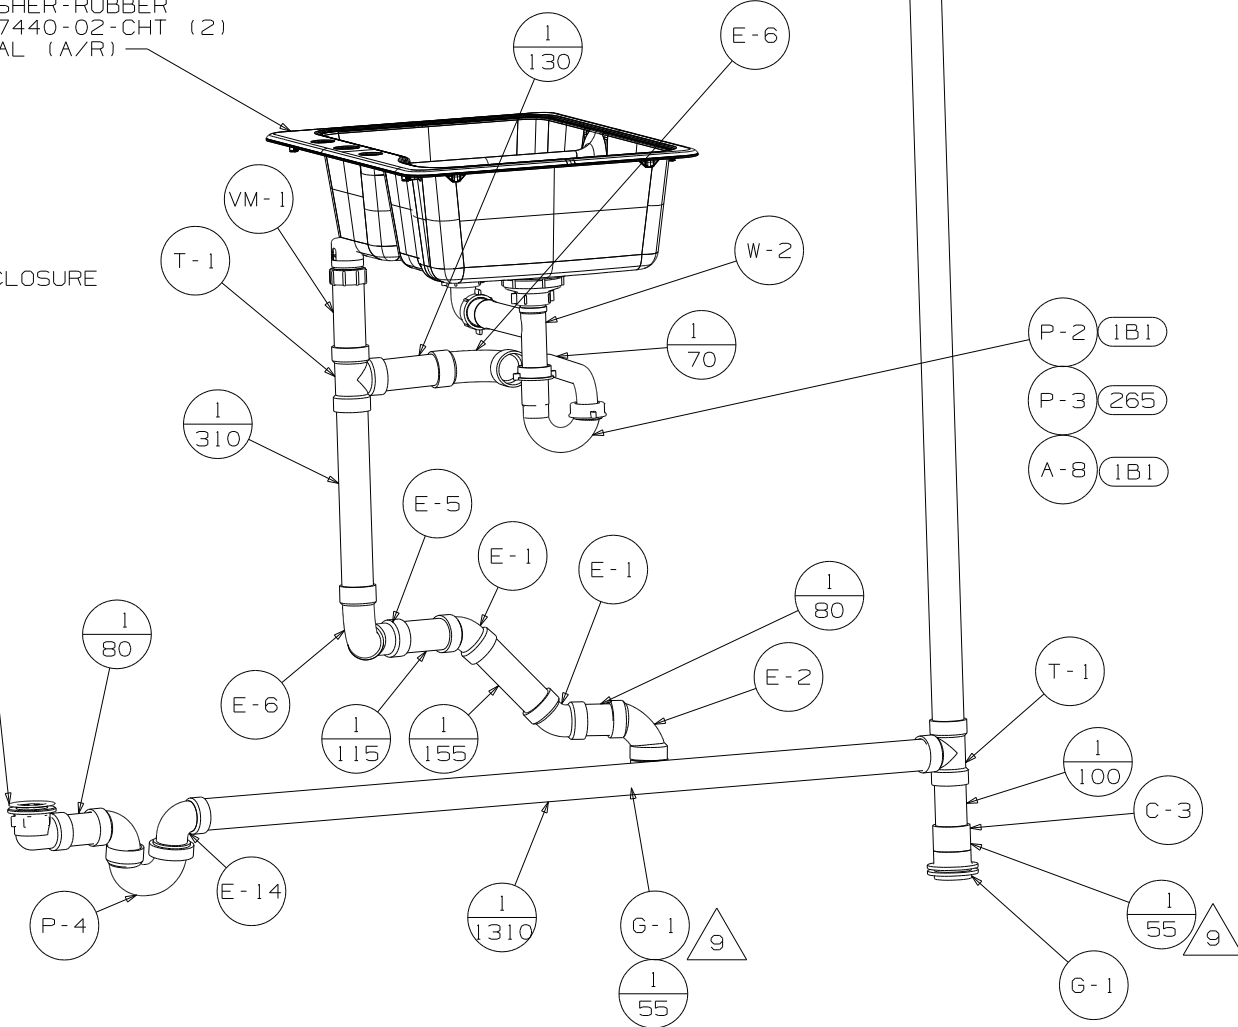


SINK
96927-01-CHT
SEAL
91255-02-000 (A/R)

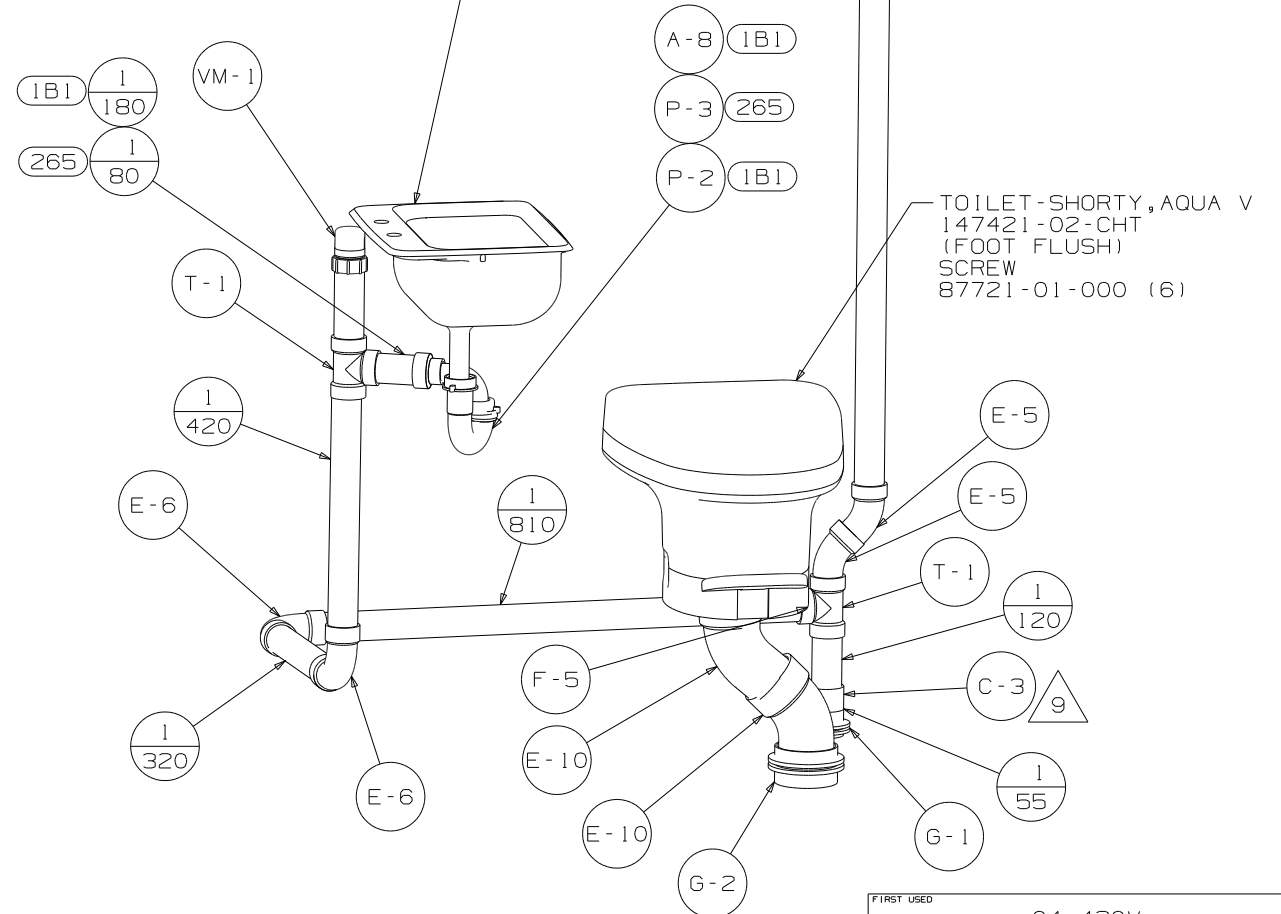

FIRST USED		04 430V	
DO NOT SCALE DRAWING			
TITLE:			
DRAINAGE SYSTEM INSTL			
SHEET 2		PART NO	146238

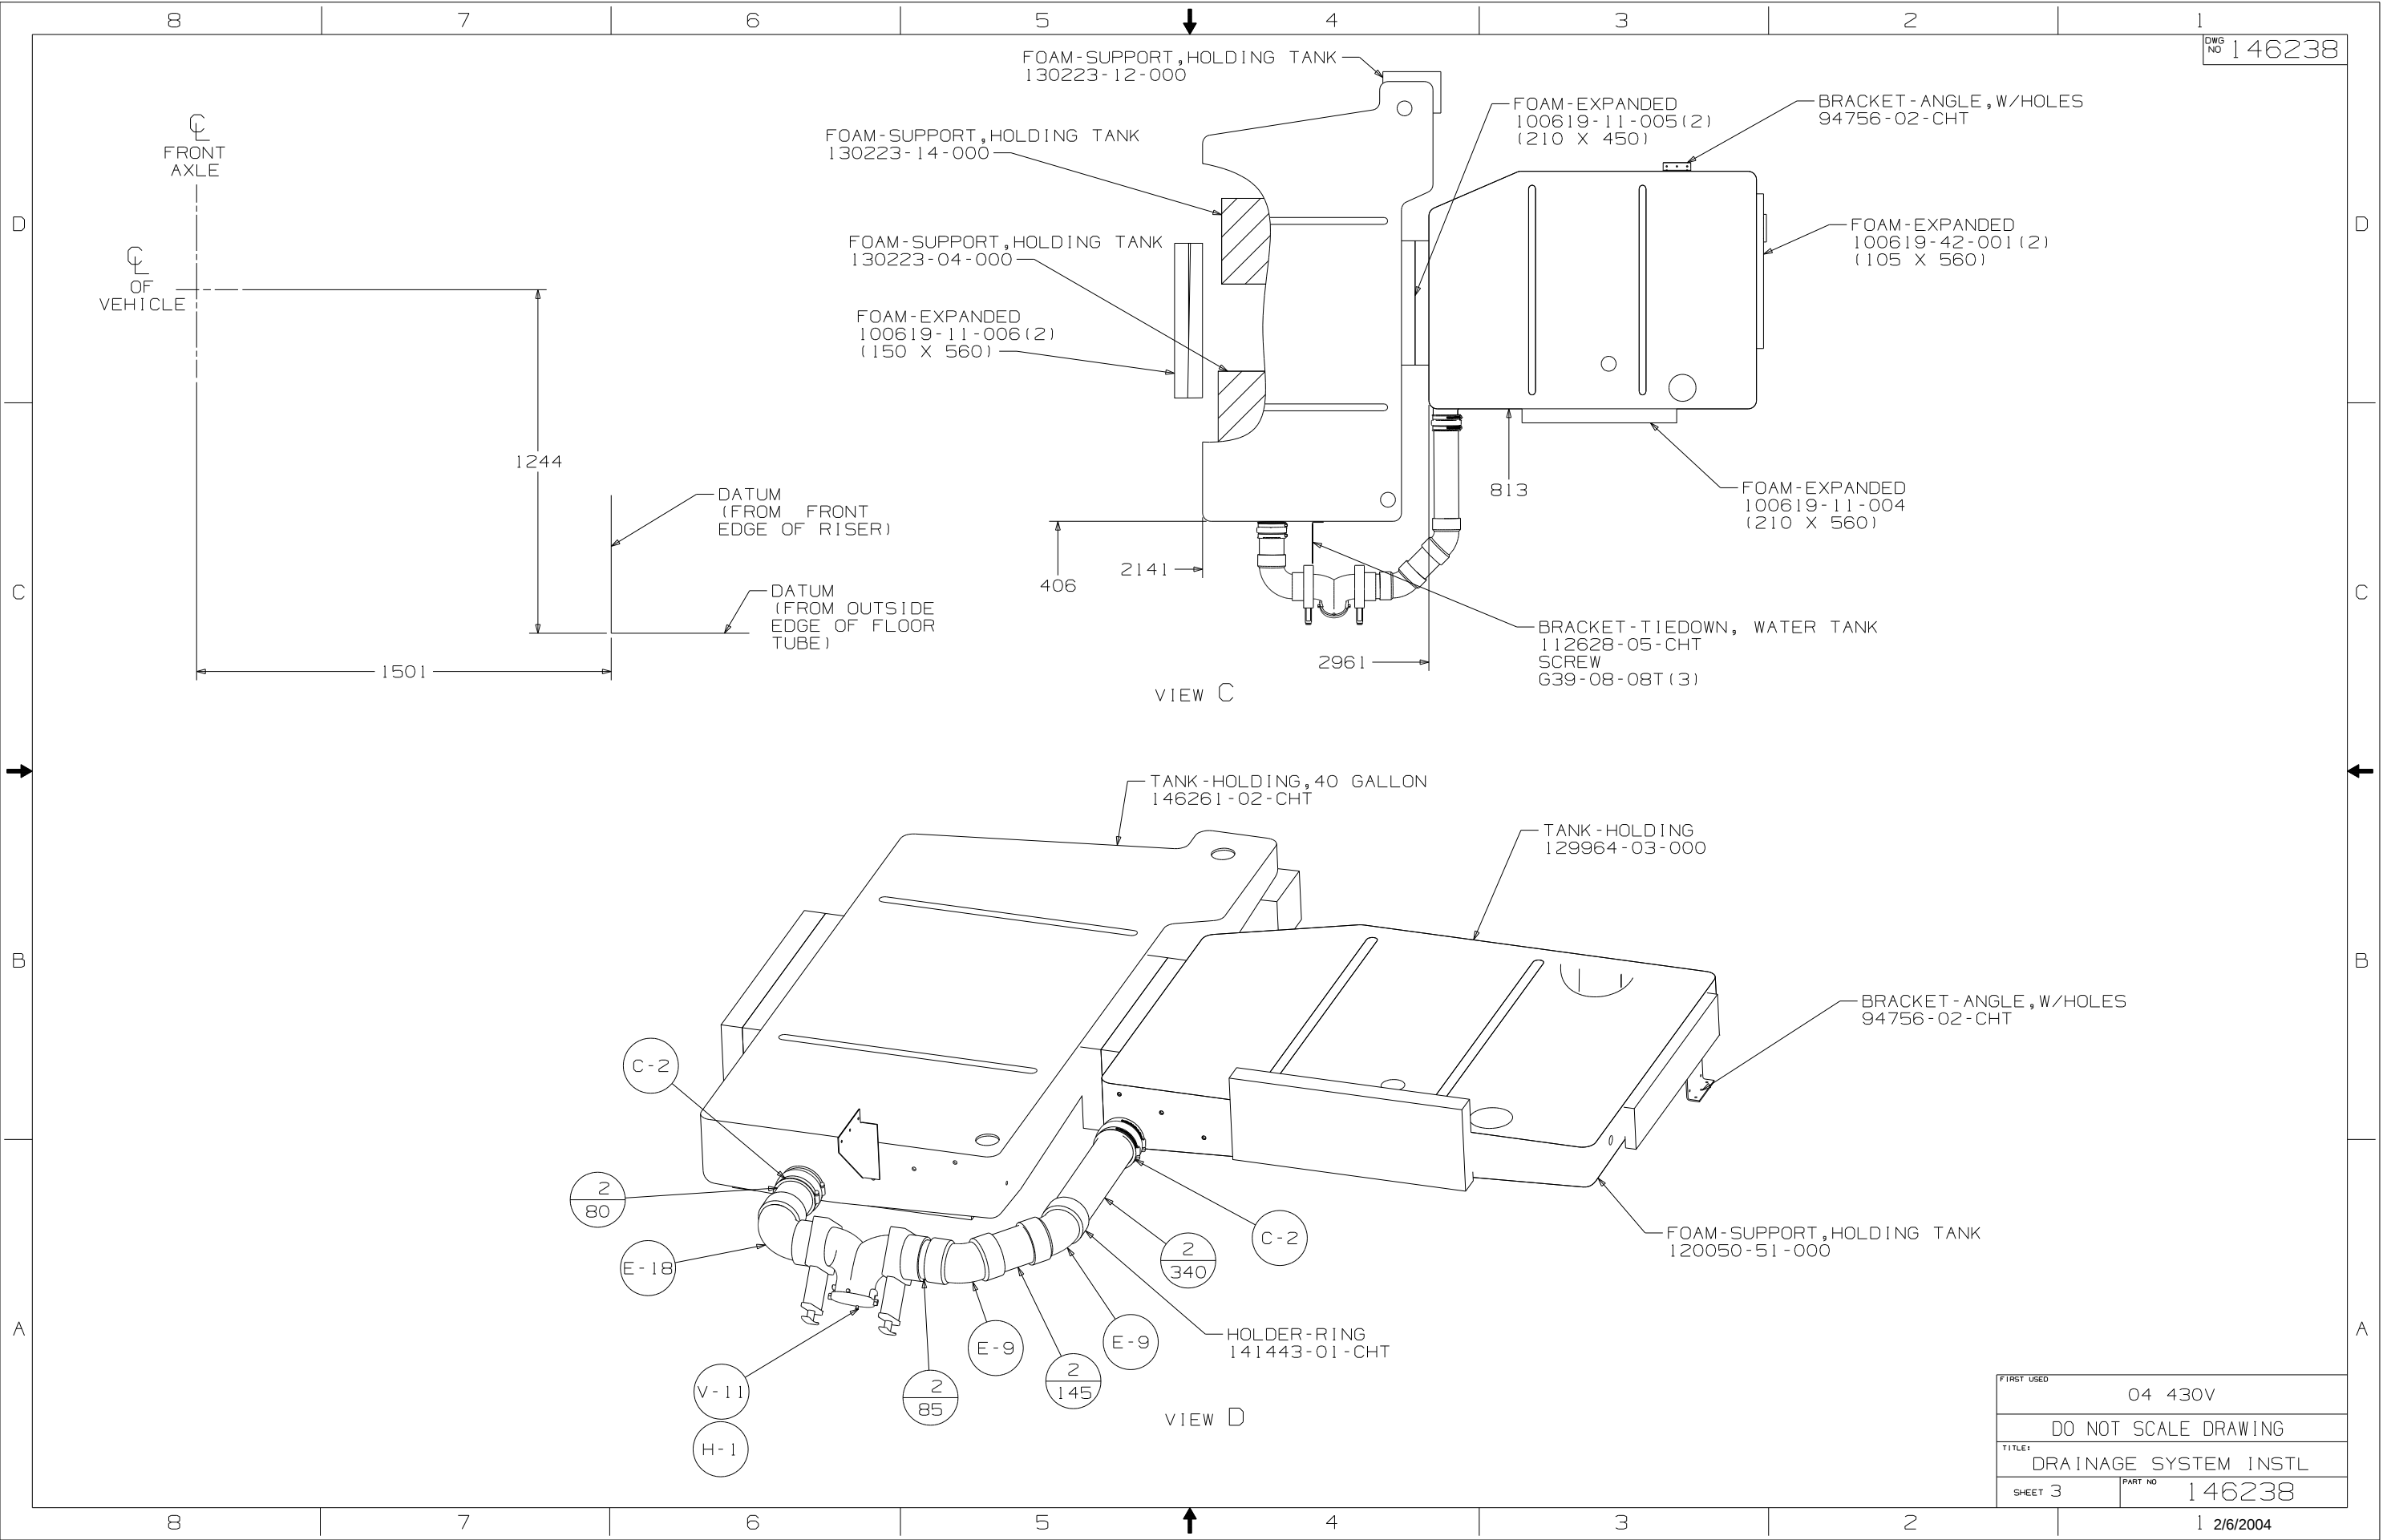

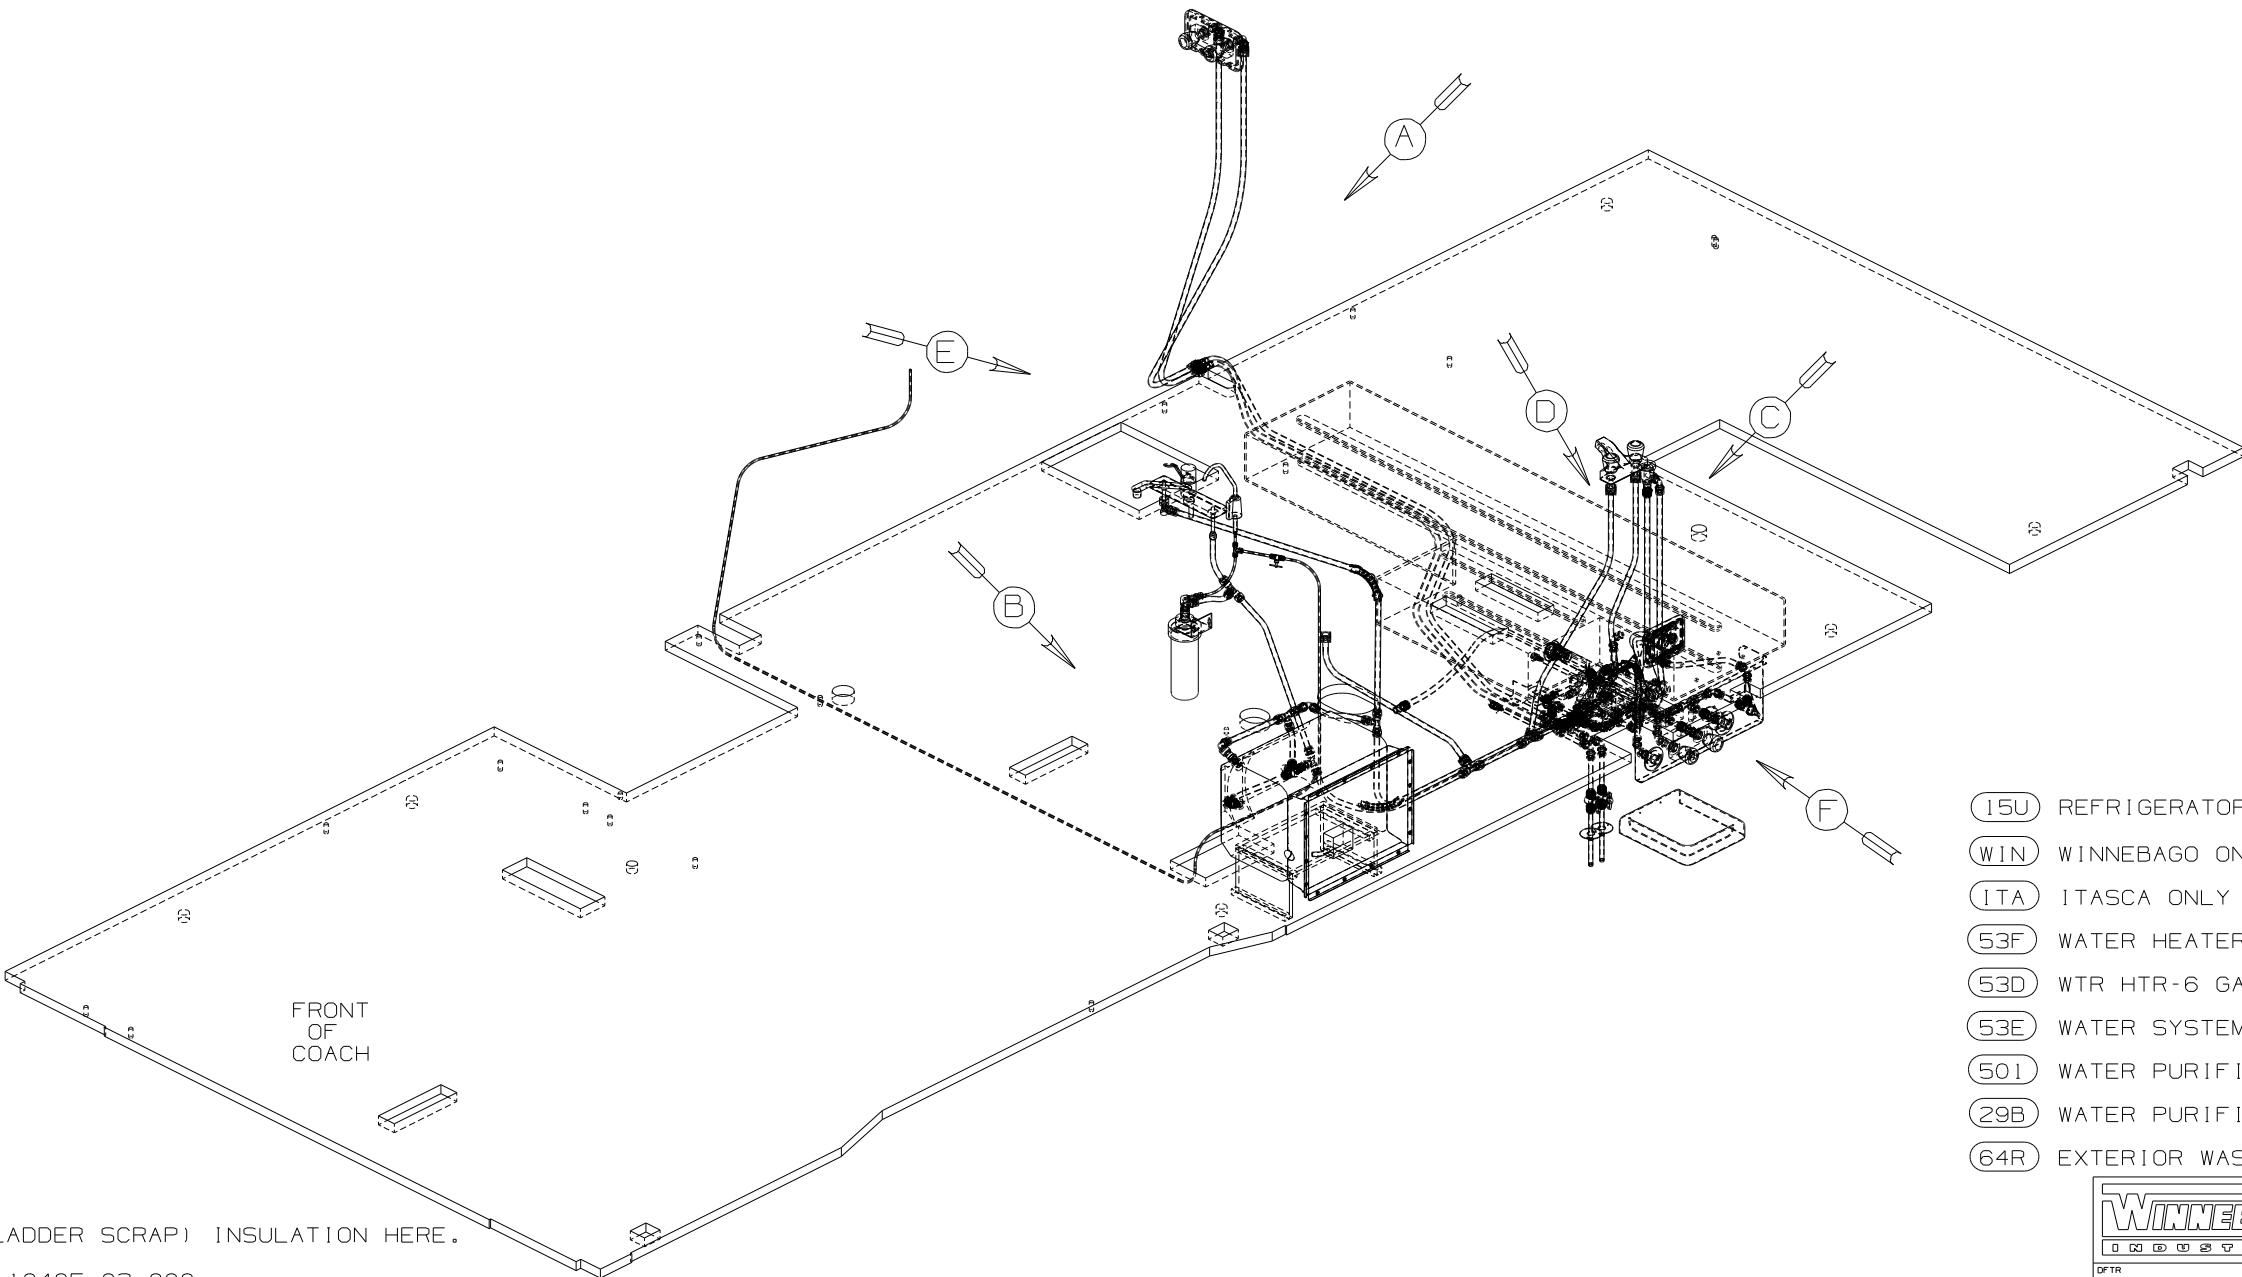


- (15U) REFRIGERATOR/FRZR W/ICEMAKER
- (WIN) WINNEBAGO ONLY
- (1TA) ITASCA ONLY
- (53F) WATER HEATER-ELEC IGNITION
- (53D) WTR HTR-6 GAL ELECTRIC/LP GAS
- (53E) WATER SYSTEM WINTERIZATION PKG
- (50I) WATER PURIFIER WITHOUT
- (29B) WATER PURIFIER SYSTEM
- (64R) EXTERIOR WASH STATION

- 8 ADD PIPE WRAP (LADDER SCRAP) INSULATION HERE.
 - 7 ADD TEFLON TAPE 10405-03-000.
 - 6 ADD TEFLON TAPE 10405-02-000.
 - 5 ADD TEFLON TAPE 10405-01-000.
 - 4 FLUSHING SYSTEM REQUIRES 125697-06-000 INSTRUCTION SHEET.
3. ALL TUBING TO BE SECURED AT 1200 INTERVALS MAXIMUM WITH CLAMP 10495-01-000 OR CLIP 9151-01-000 AND SCREW 667-10-12B.
2. TUBING TO BE INSTALLED WITH SUFFICIENT SLOPE TO PROVIDE DRAINAGE TO NEAREST VALVE.
1. PLASTIC FITTINGS TO BE SEALED WITH SEALANT 84456-01-000.

NOTES:

FOR
WATER
CALLOUTS
SEE DWG NO
116230-01-000


WINNEBAGO		COPYRIGHT 2004 WINNEBAGO INDUSTRIES, INC.	
DFTR	CHKR	ORIG. DATE	
P.E.	M.E.	ALL DIMENSIONS ARE IN MILLIMETERS	
DSNR		FIRST USED	04 430V
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X)		7	
ONE-PLACE (X,X)			
TWO-PLACE (X,XX)			
ANGLE			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: WATER SYSTEM INSTL			
SHEET 1 OF 4		PART NO 146237	

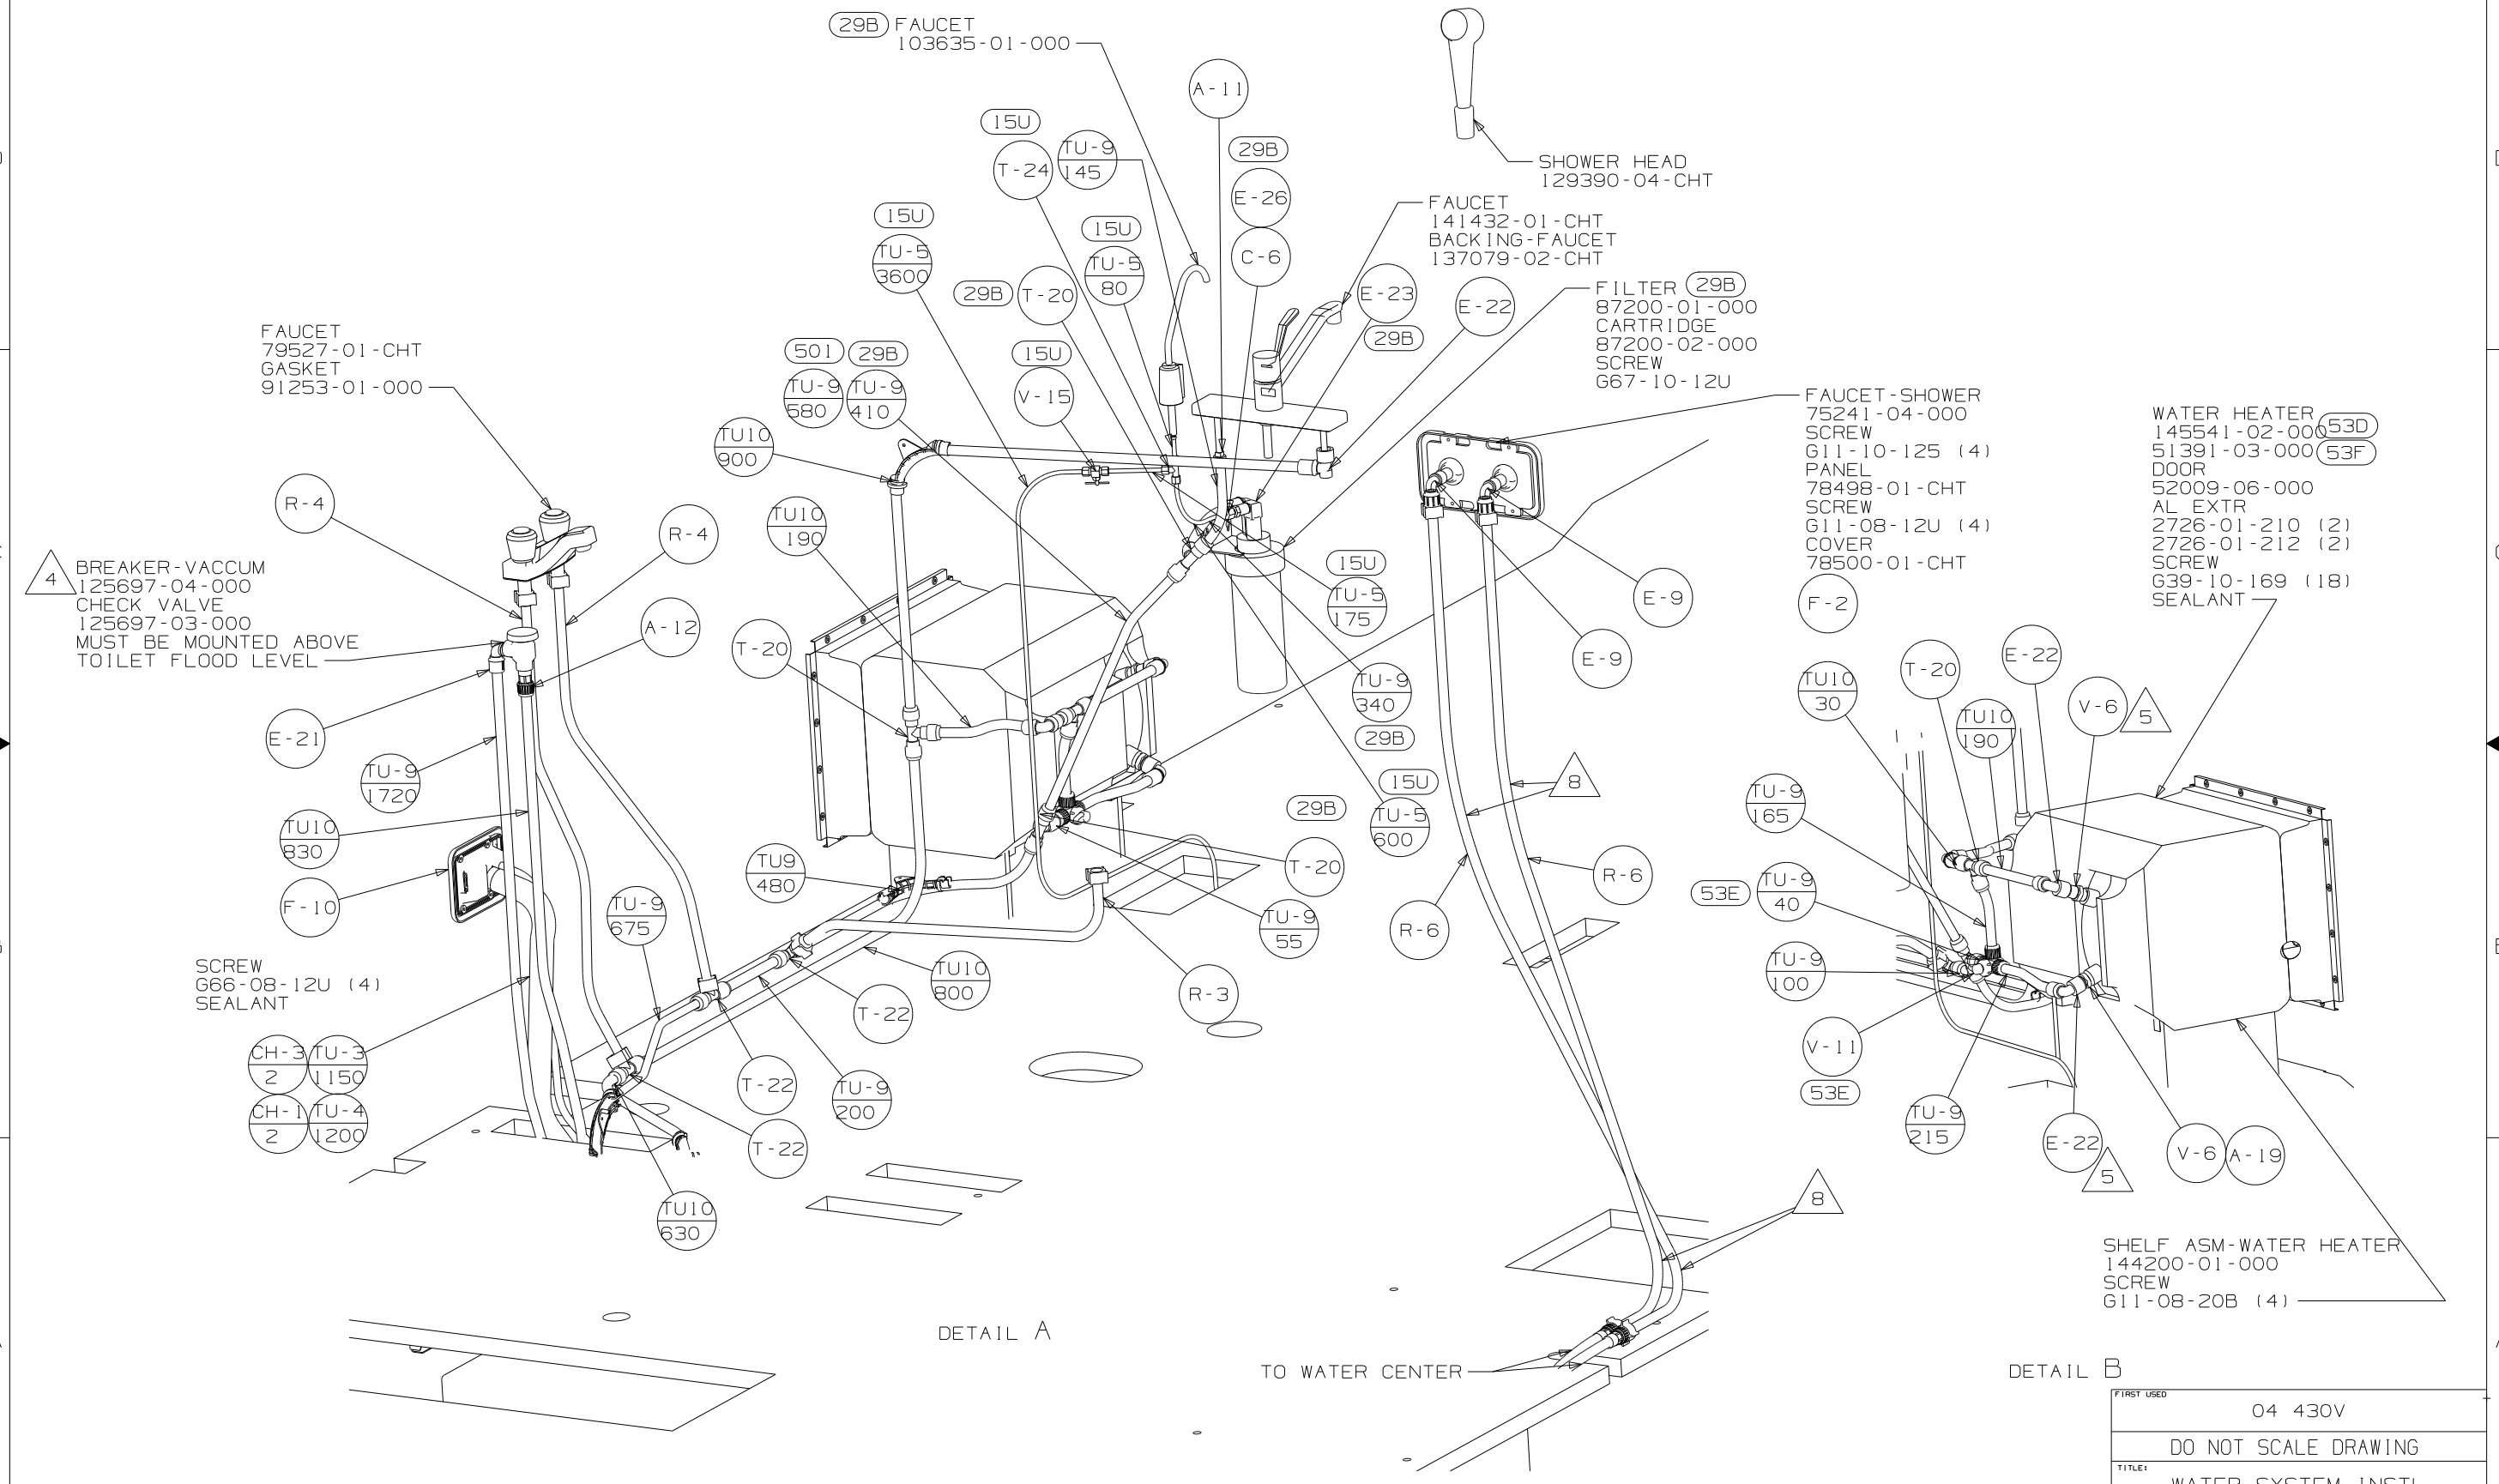


D
C
B
A

D
C
B
A

FIRST USED		04 430V
DO NOT SCALE DRAWING		
TITLE		WATER SYSTEM INSTL
SHEET 2	PART NO	146237

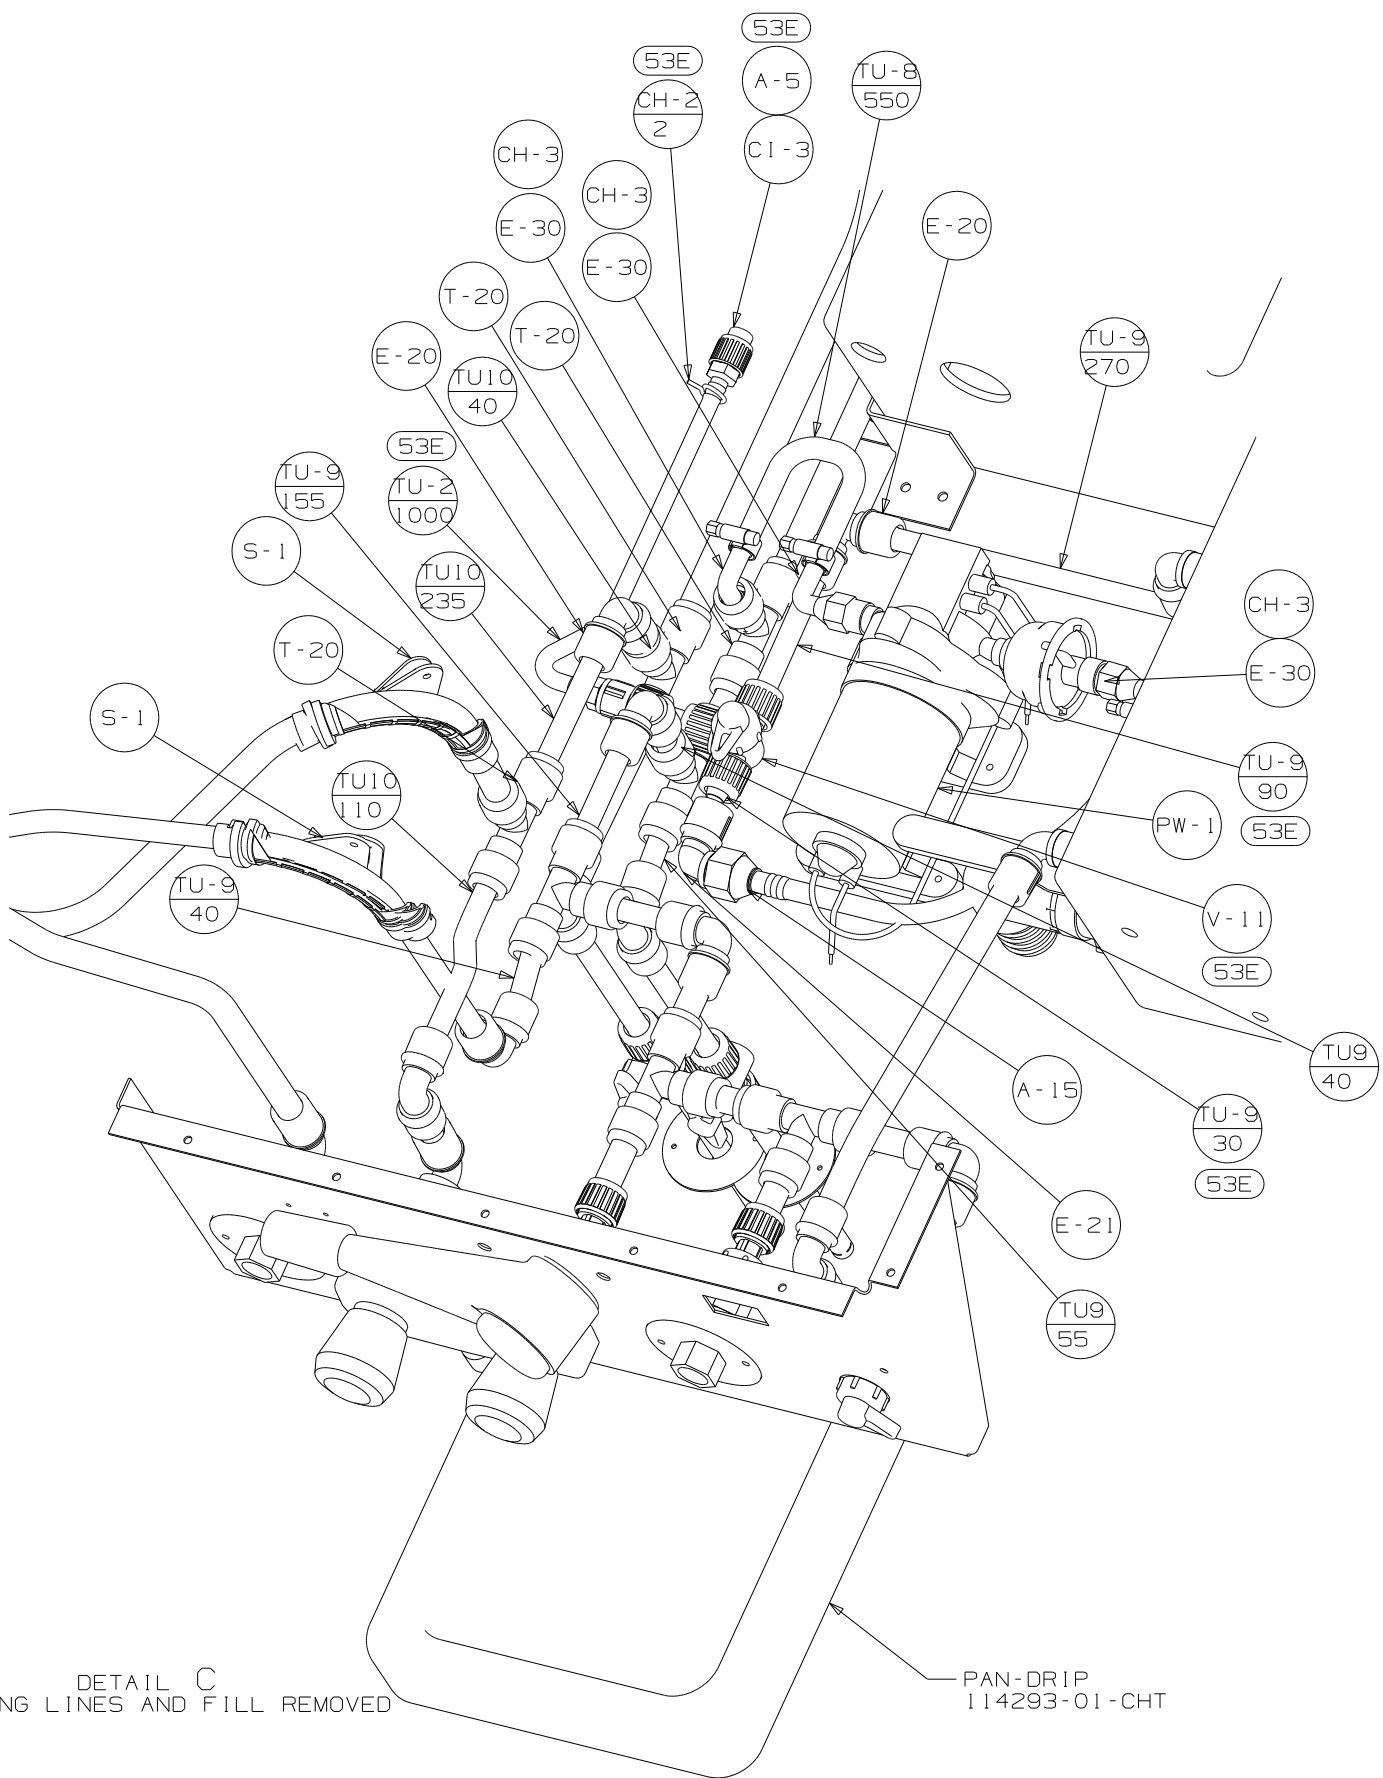


DETAIL C
FLUSHING LINES AND FILL REMOVED

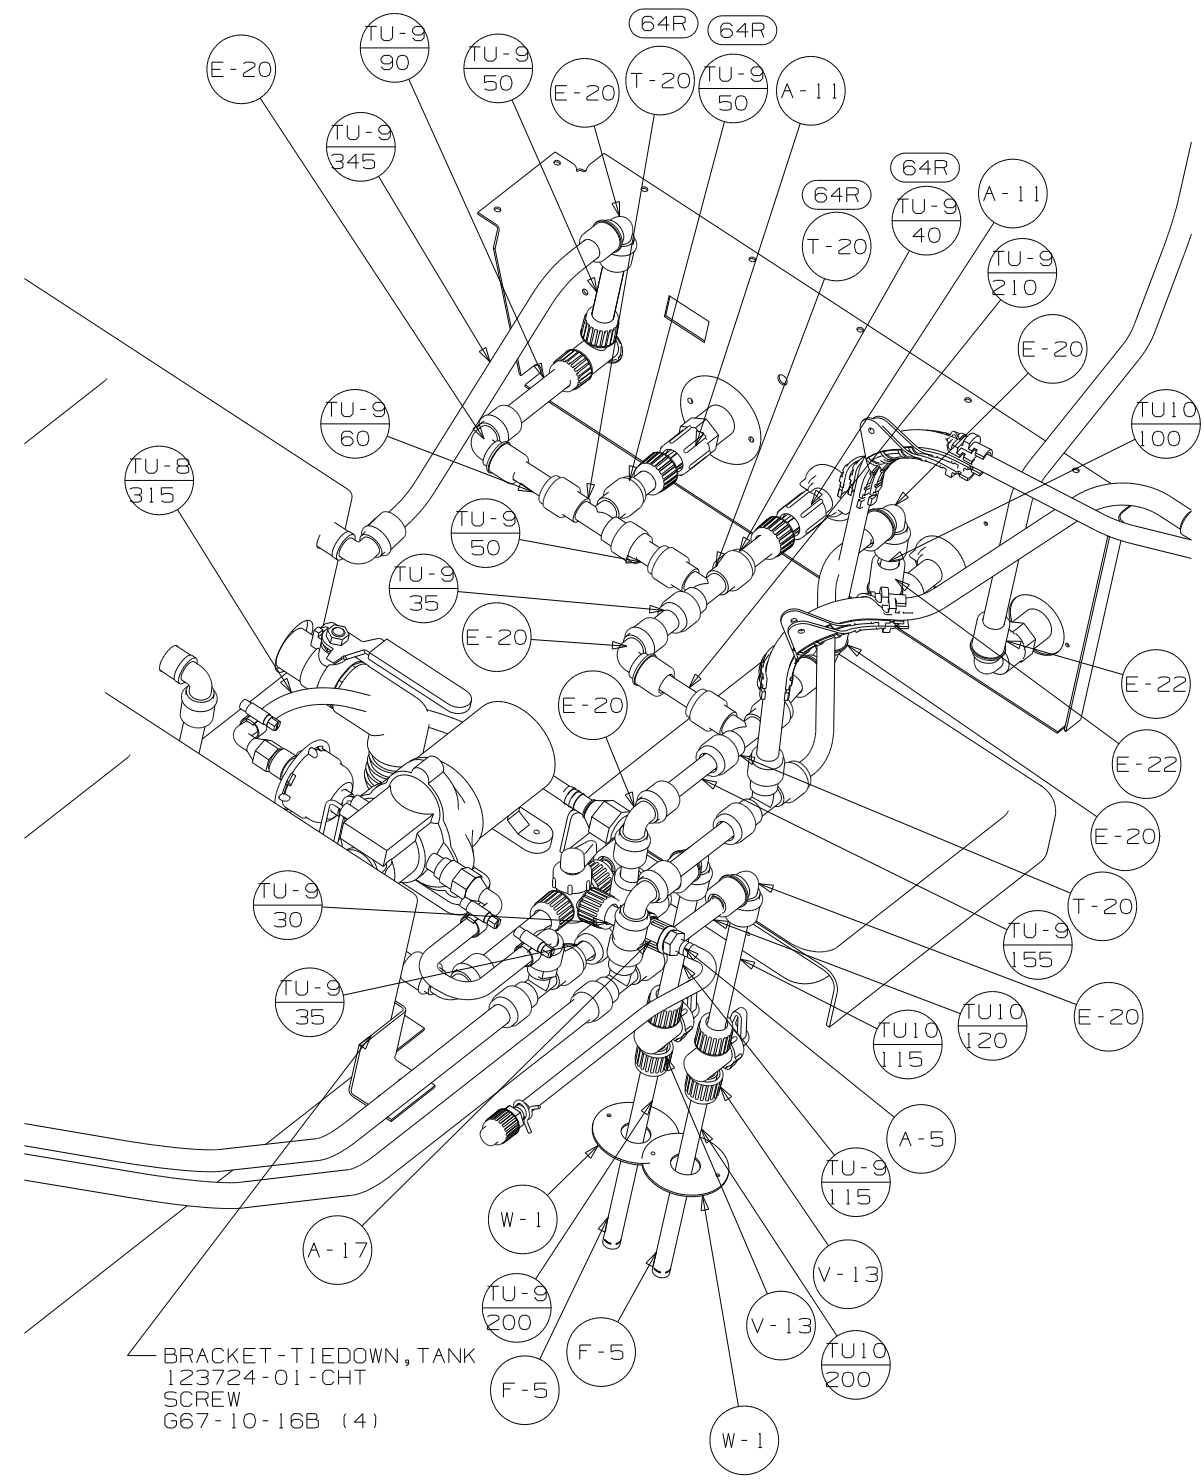


DETAIL D
FLUSHING LINES AND FILL REMOVED


FIRST USED		04 430V
TITLE		DO NOT SCALE DRAWING
SHEET 3		PART NO 146237
		1 3/24/2004

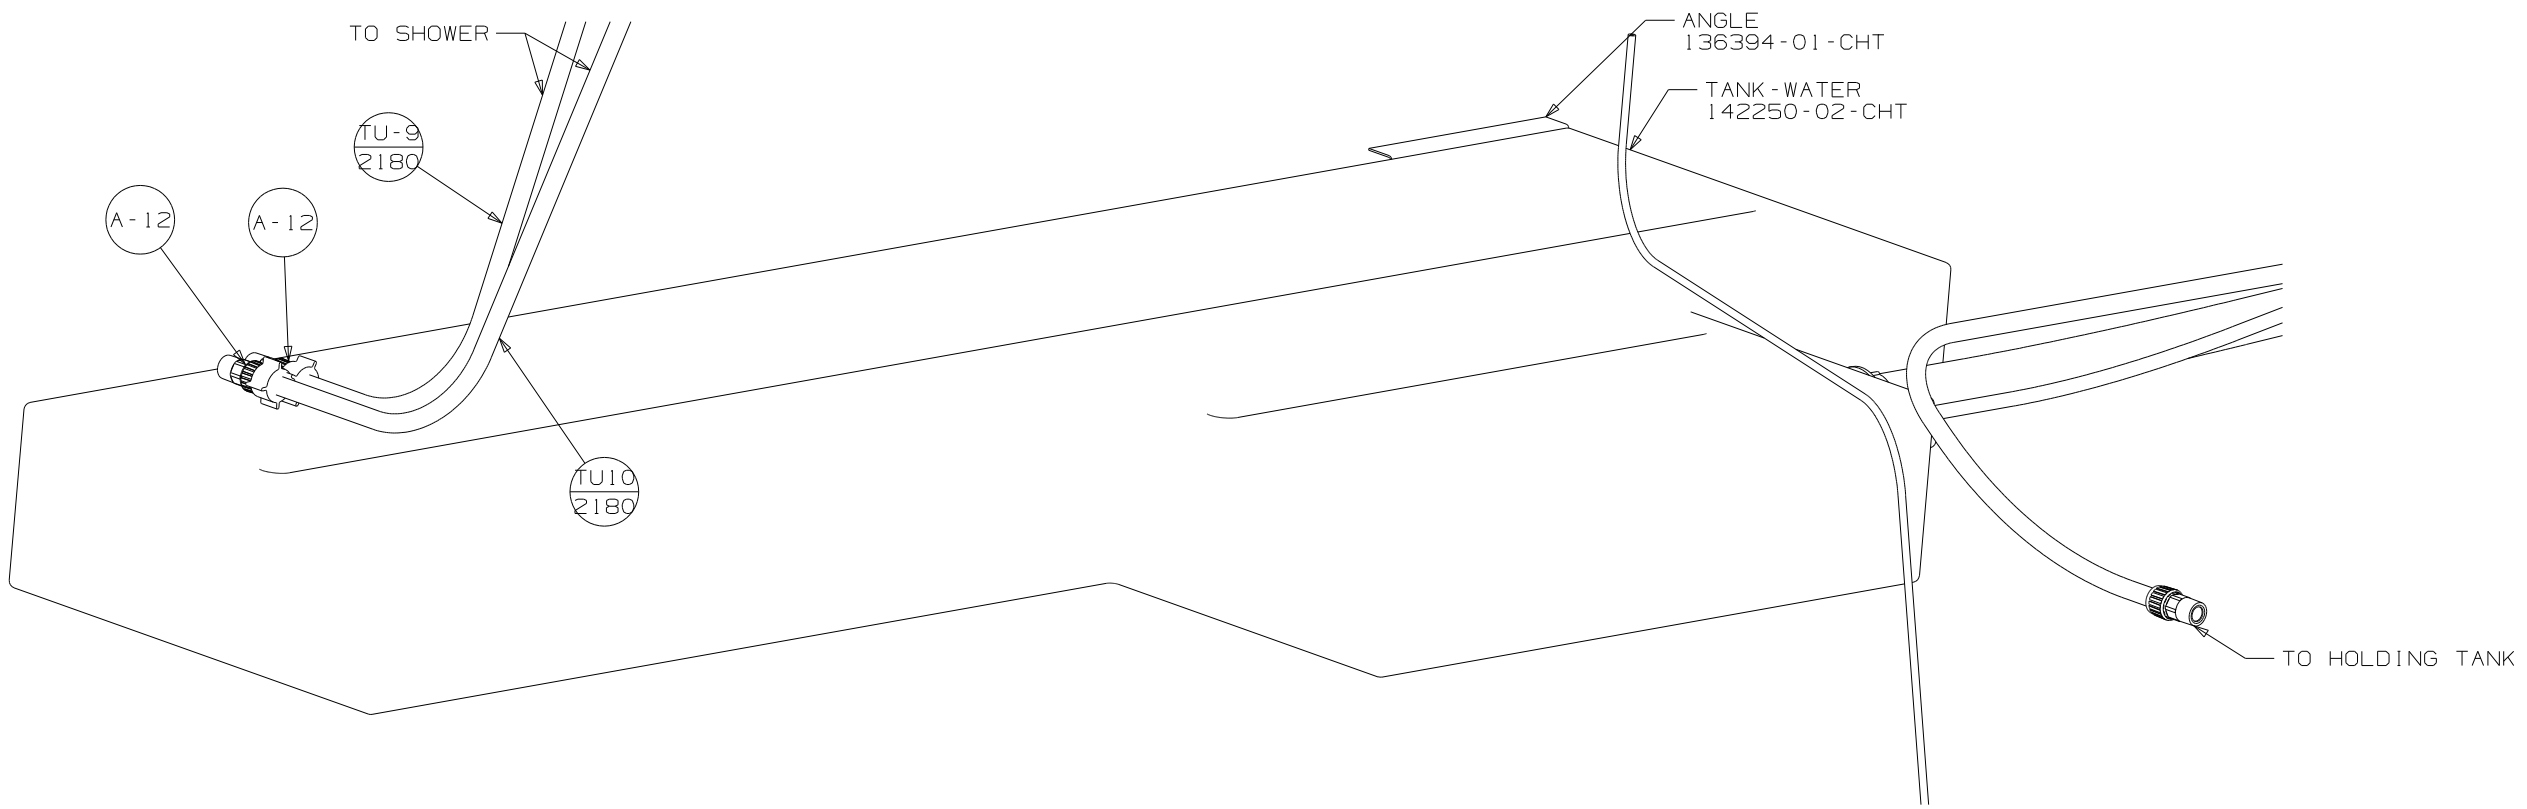

DETAIL E

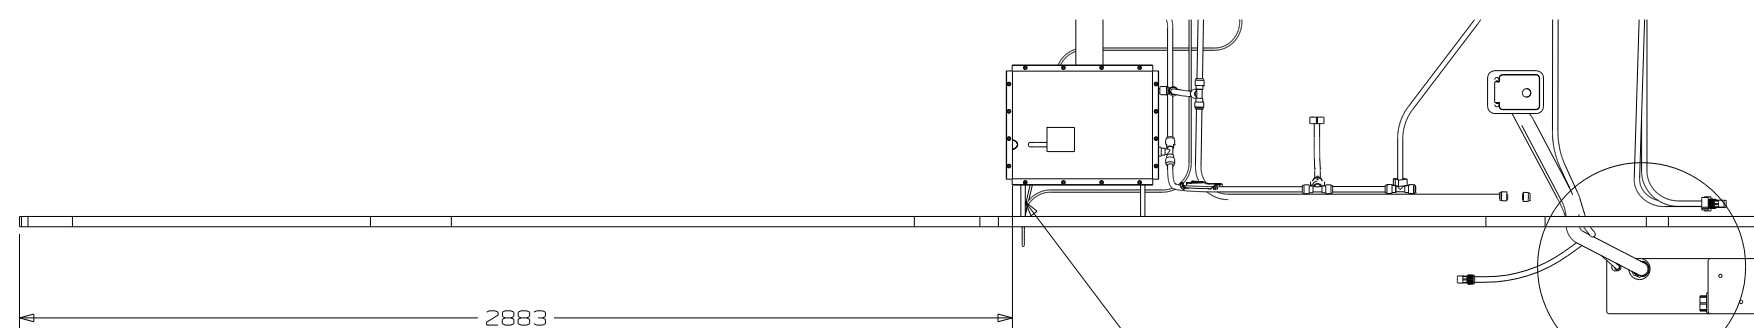

DETAIL F

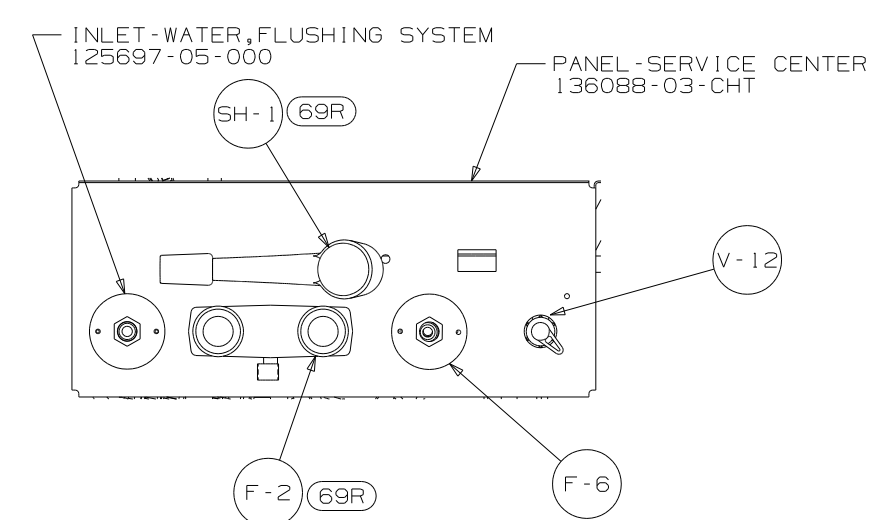

DETAIL G

DETAIL G

FIRST USED	04 430V
TITLE	DO NOT SCALE DRAWING
SHEET 4	PART NO 146237
	1 3/24/2004