




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.






CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.


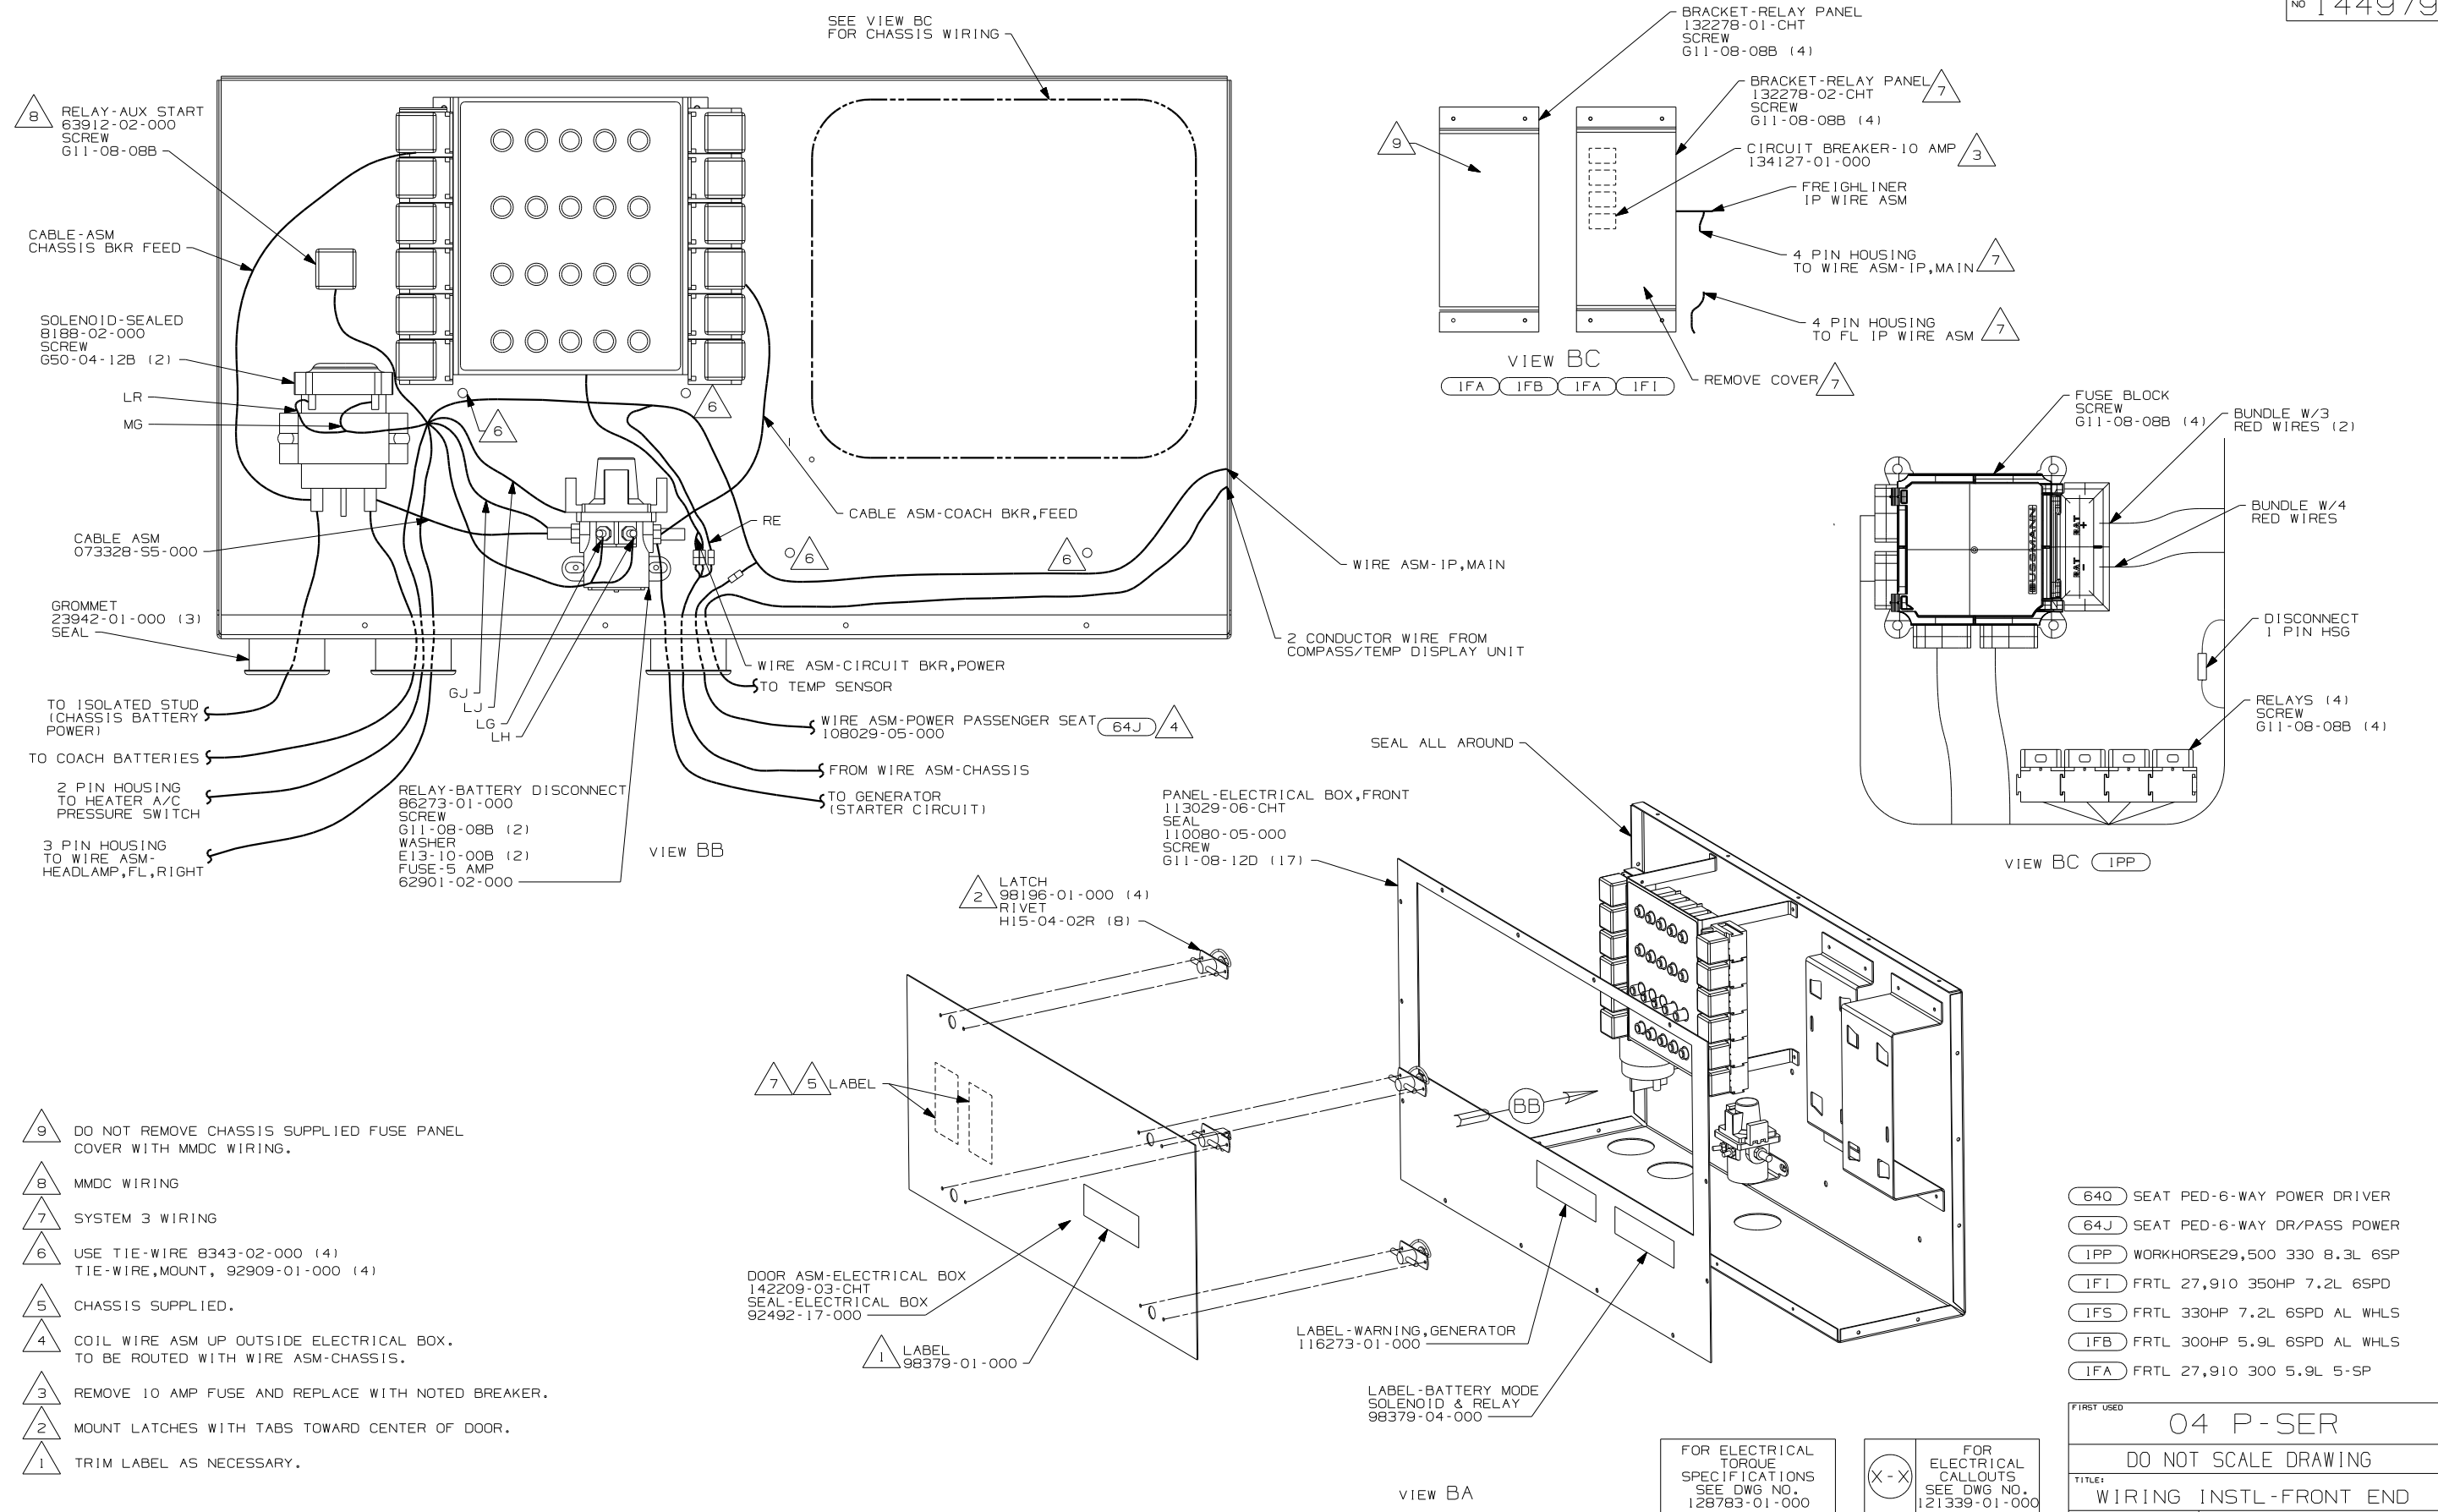


NOTES:										SHEET 2		PART NO 1 44979	
8	7	6	5	↑	4	3	2			1 3/8/2005			

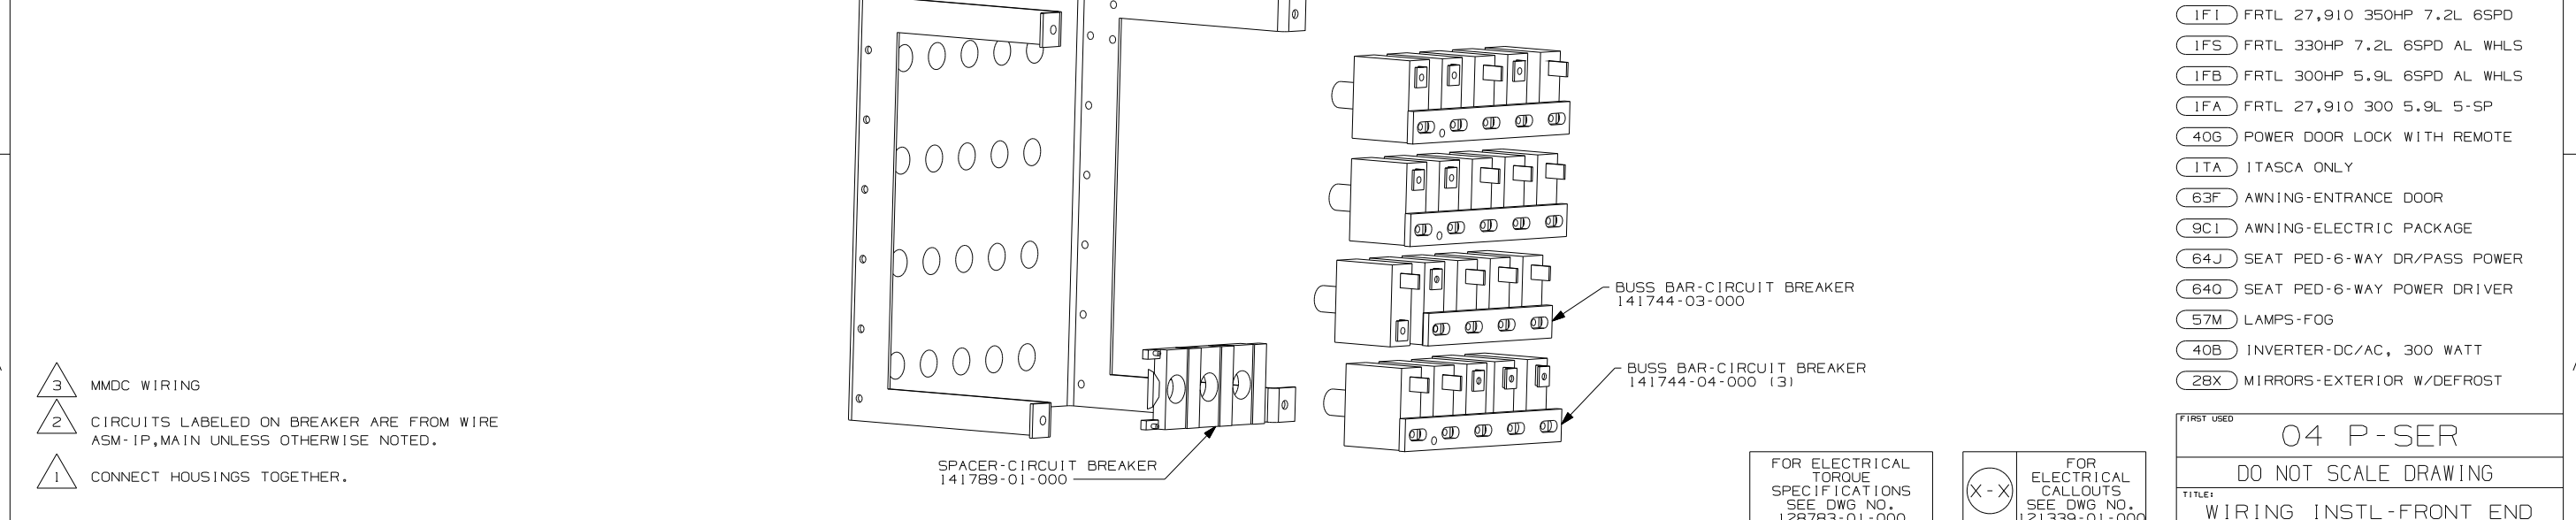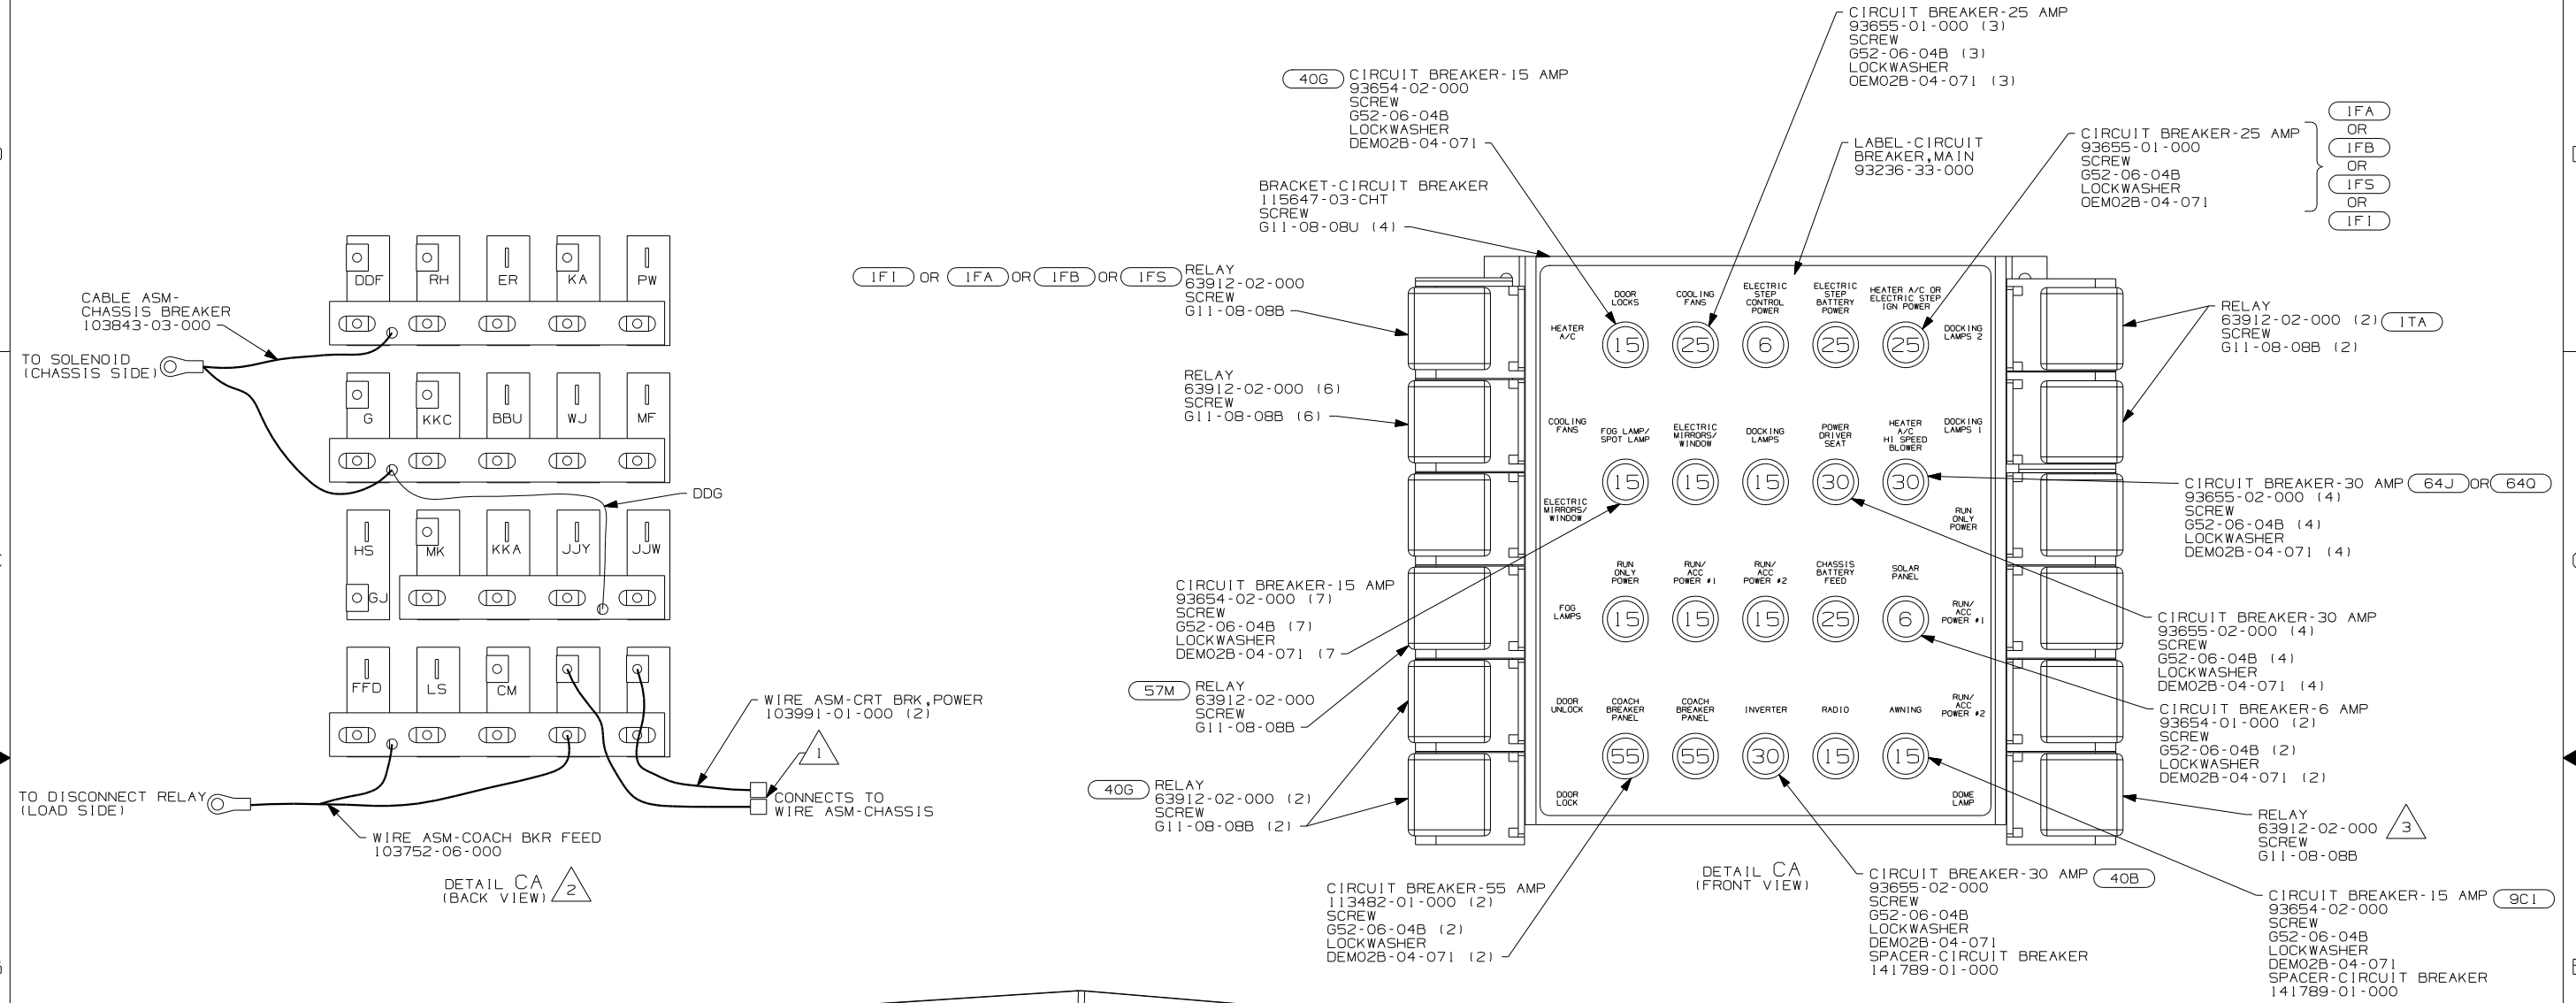

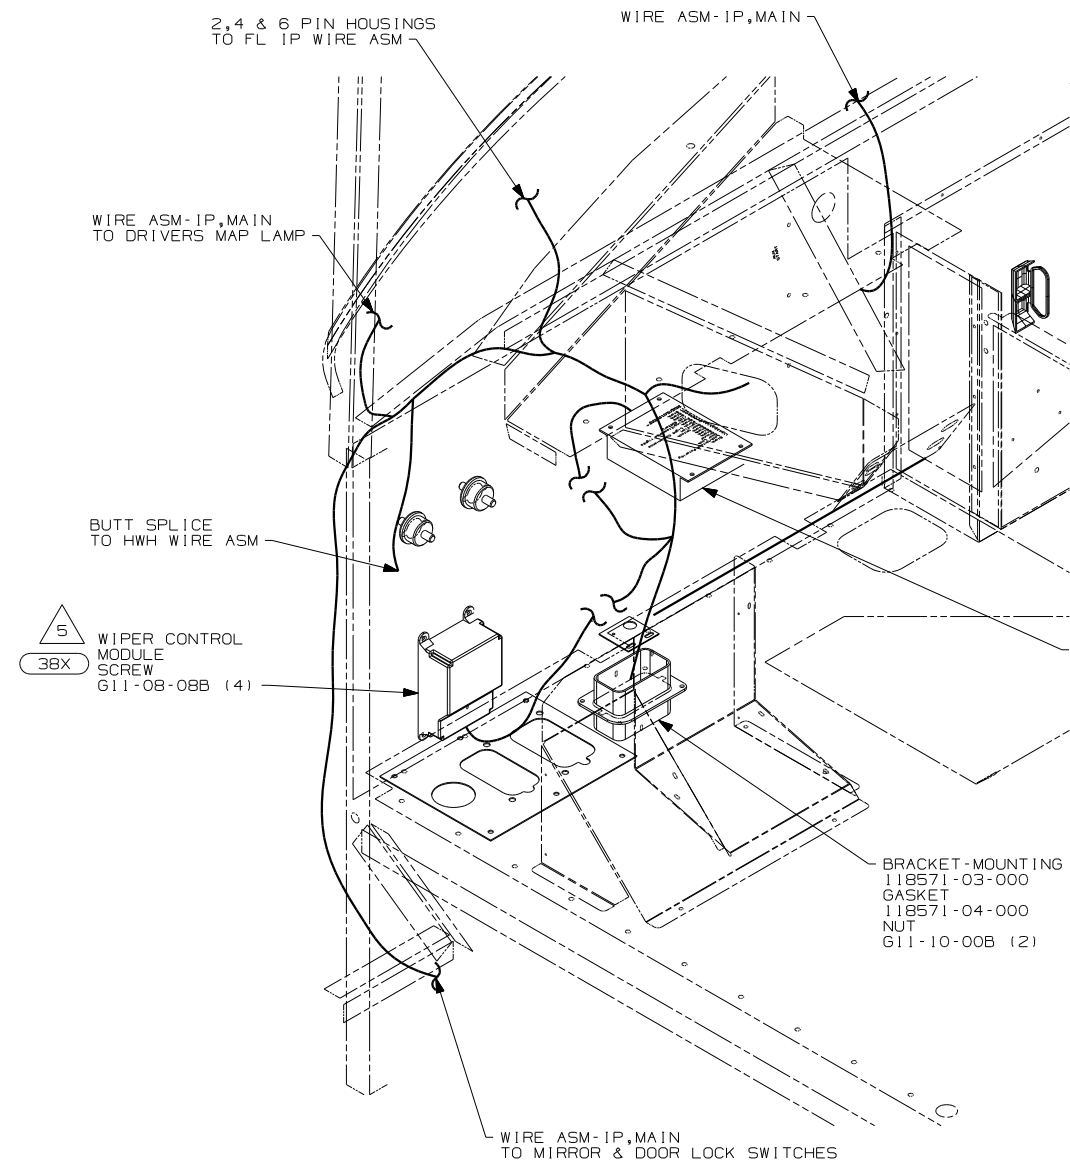

VIEW DA
(WINNEBAGO WIRING SHOWN)

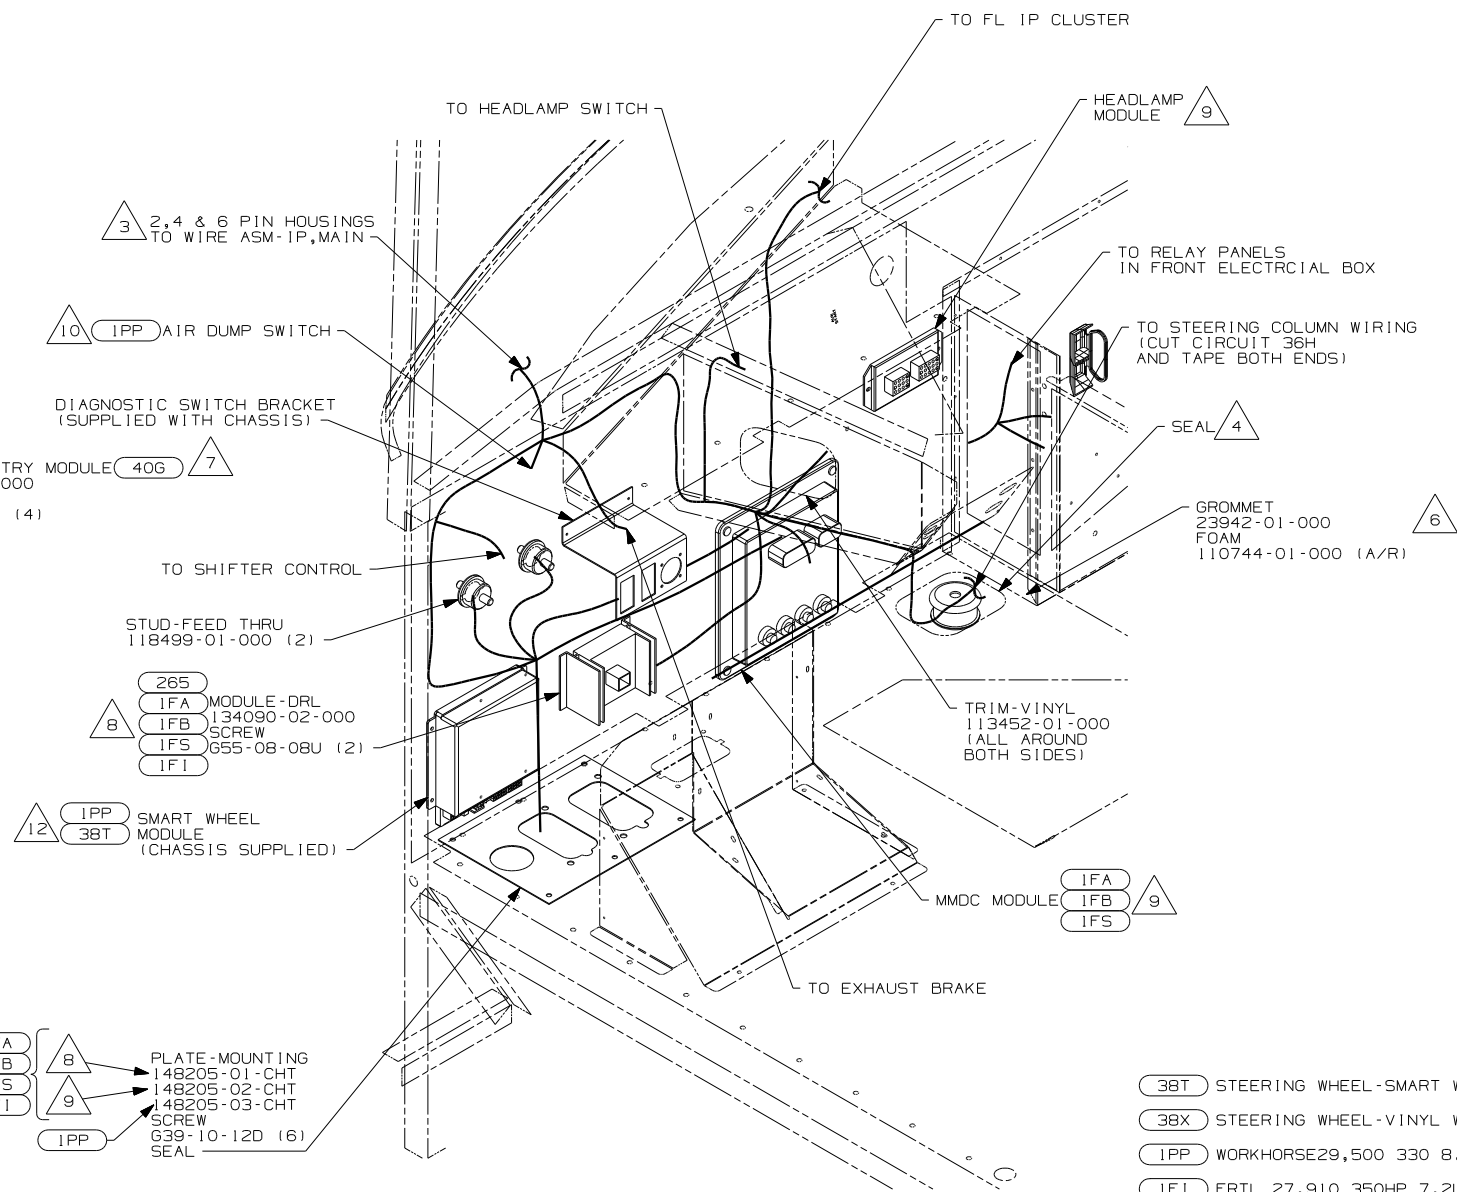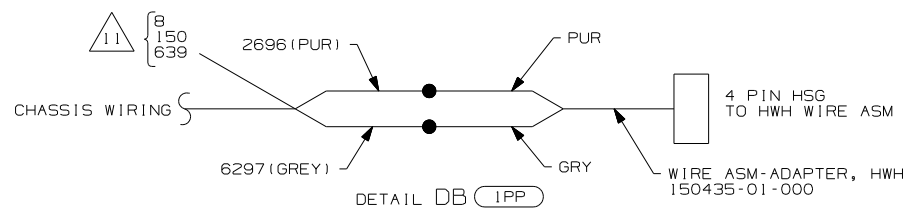

VIEW DA 2
(CHASSIS WIRING SHOWN)

- 9 MMDC WIRING
- 8 SYSTEM 3 WIRING
- 7 MOUNT TO PLENUM PANEL AS SHOWN.
- 6 PUT 1 SEAL IN FRONT OF HOLE AT CAB PREP.
- 5 SEE WIPER CONTROL INFORMATION FOR INSTALLATION INSTRUCTION.
- 4 ROUTE PARK BRAKE VALVE AND AIR LINES FOR DASH GAUGES THRU HERE. COVER WITH CONVOLUTE TUBING 41953 WHERE VISIBLE.
- 3 DO NOT USE SEAT BELT 2 PIN HOUSING.
- 2 FL IP WIRE ASM SHOULD BE TIED PRIOR TO INSTALLATION. SEE DETAIL HA FOR TYING INSTRUCTIONS.

- 12 CONNECT RED WIRE TO J5 & YELLOW WIRE TO J6.
- 11 TAPE EACH CIRCUIT INDIVIDUALLY & TAPE BACK INTO LOOM WITH TAPE 8363-01-000.
- 10 CUT TERMINALS & HSG FROM WORKHORSE SUPPLIED AIR DUMP SWITCH AND RECONNECT AS SHOWN IN DETAIL DB.

- 8 265 PLATE-MOUNTING 148205-01-CHT 148205-02-CHT 148205-03-CHT SCREW 639-10-12D (6) SEAL
- 9 12 10

- 38T STEERING WHEEL-SMART WHEEL
- 38X STEERING WHEEL-VINYL WRAPPED
- IPP WORKHORSE29,500 330 8.3L 6SP
- IFI FRTL 27,910 350HP 7.2L 6SPD
- IFS FRTL 330HP 7.2L 6SPD AL WHLS
- IFB FRTL 300HP 5.9L 6SPD AL WHLS
- IFA FRTL 27,910 300 5.9L 5-SP
- 265 CODES/STANDARDS-CSA/CMVSS


NOTES:

- 1. BUNDLE AND SECURE ALL EXCESS WIRE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED		04 P-SER	
		DO NOT SCALE DRAWING	
TITLE		WIRING INSTL-FRONT END	
SHEET 4	PART NO	144979	
		1 3/8/2005	

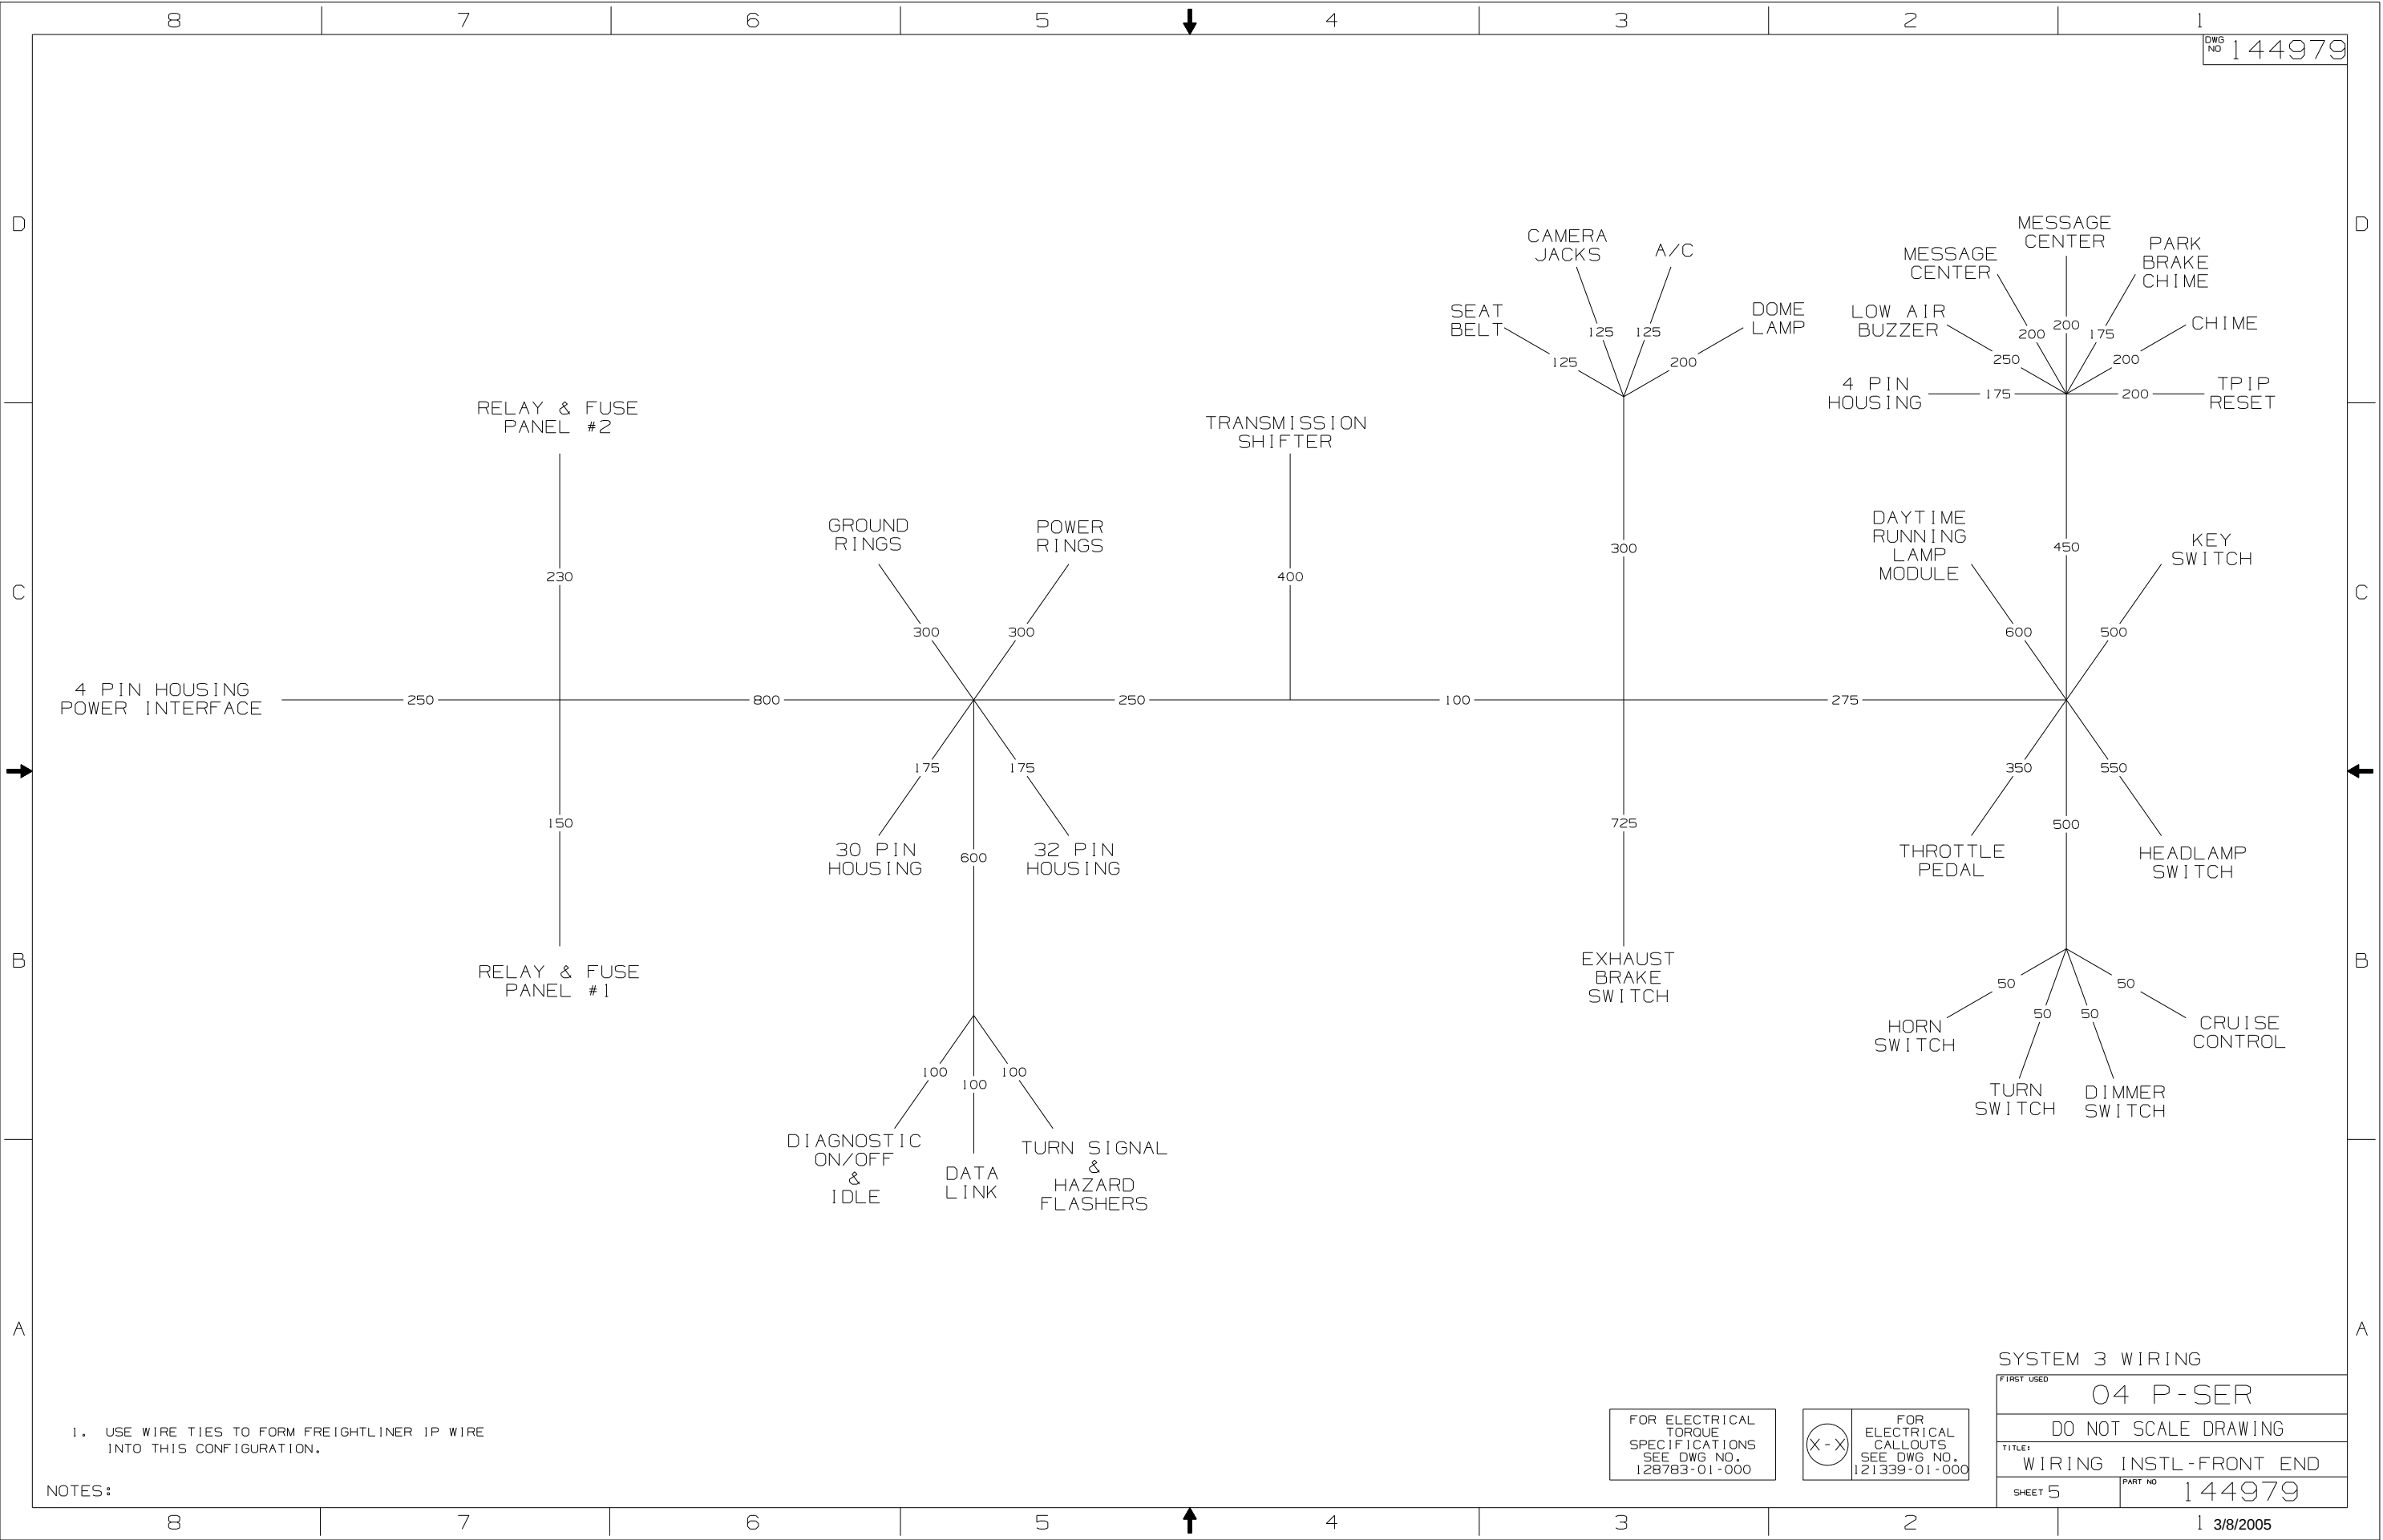

D

D

C


C

B

B

A

A

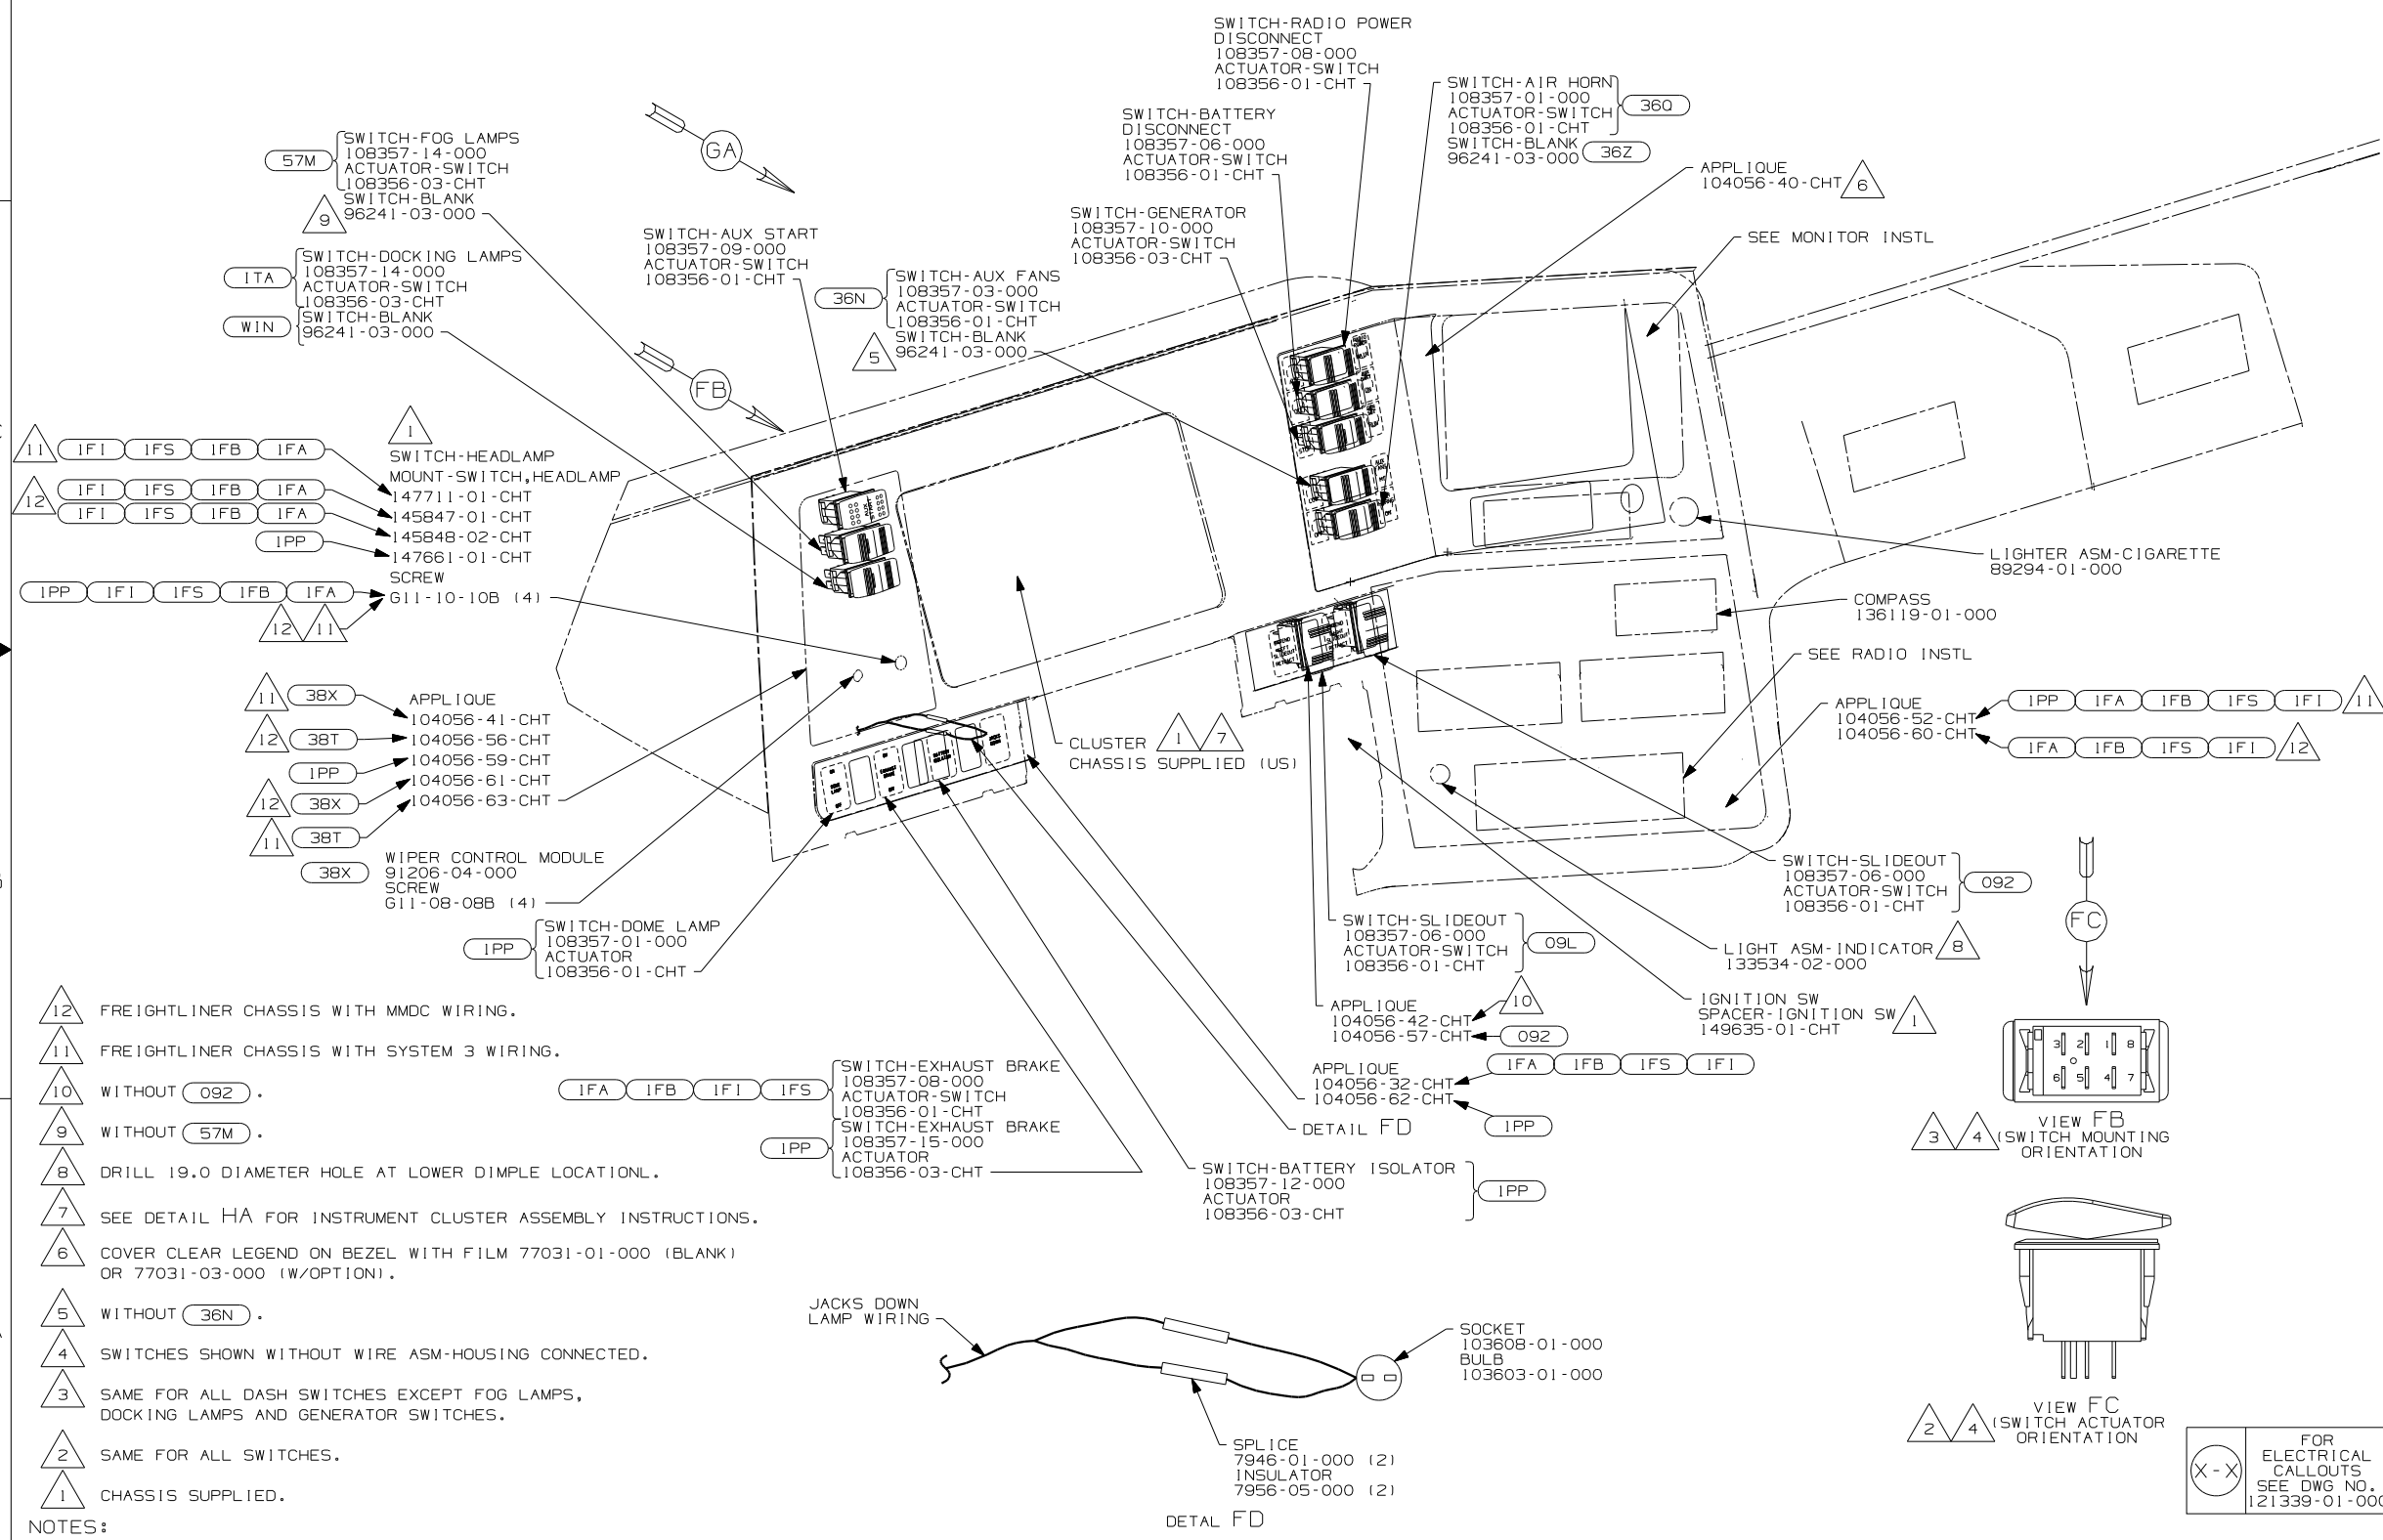


- 12 FREIGHTLINER CHASSIS WITH MMDC WIRING.
11 FREIGHTLINER CHASSIS WITH SYSTEM 3 WIRING.
10 WITHOUT 092.
9 WITHOUT 57M.
8 DRILL 19.0 DIAMETER HOLE AT LOWER DIMPLE LOCATION.
7 SEE DETAIL HA FOR INSTRUMENT CLUSTER ASSEMBLY INSTRUCTIONS.
6 COVER CLEAR LEGEND ON BEZEL WITH FILM 77031-01-000 (BLANK) OR 77031-03-000 (W/OPTION).
5 WITHOUT 36N.
4 SWITCHES SHOWN WITHOUT WIRE ASM-HOUSING CONNECTED.
3 SAME FOR ALL DASH SWITCHES EXCEPT FOG LAMPS, DOCKING LAMPS AND GENERATOR SWITCHES.
2 SAME FOR ALL SWITCHES.
1 CHASSIS SUPPLIED.



NOTES:


- 38T STEERING WHEEL-SMART WHEEL
38X STEERING WHEEL-VINYL WRAPPED
1PP WORKHORSE29,500 330 8.3L 6SP
IFS FRTL 330HP 7.2L 6SPD AL WHLS
IFI FRTL 27,910 350HP 7.2L 6SPD
IFB FRTL 300HP 5.9L 6SPD AL WHLS
IFA FRTL 27,910 300 5.9L 5-SP
092 SLIDEOUT ROOM - FRONT RIGHT
09L SLIDEOUT ROOM FRONT LEFT
36Z AIR HORNS - WITHOUT
57M LAMPS-FOG
360 AIR HORNS-CHROME
36N FANS-DEFROSTER, AUXILIARY

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED		04 P-SER	
		DO NOT SCALE DRAWING	
TITLE:		WIRING INSTL-FRONT END	
SHEET 6		PART NO	144979

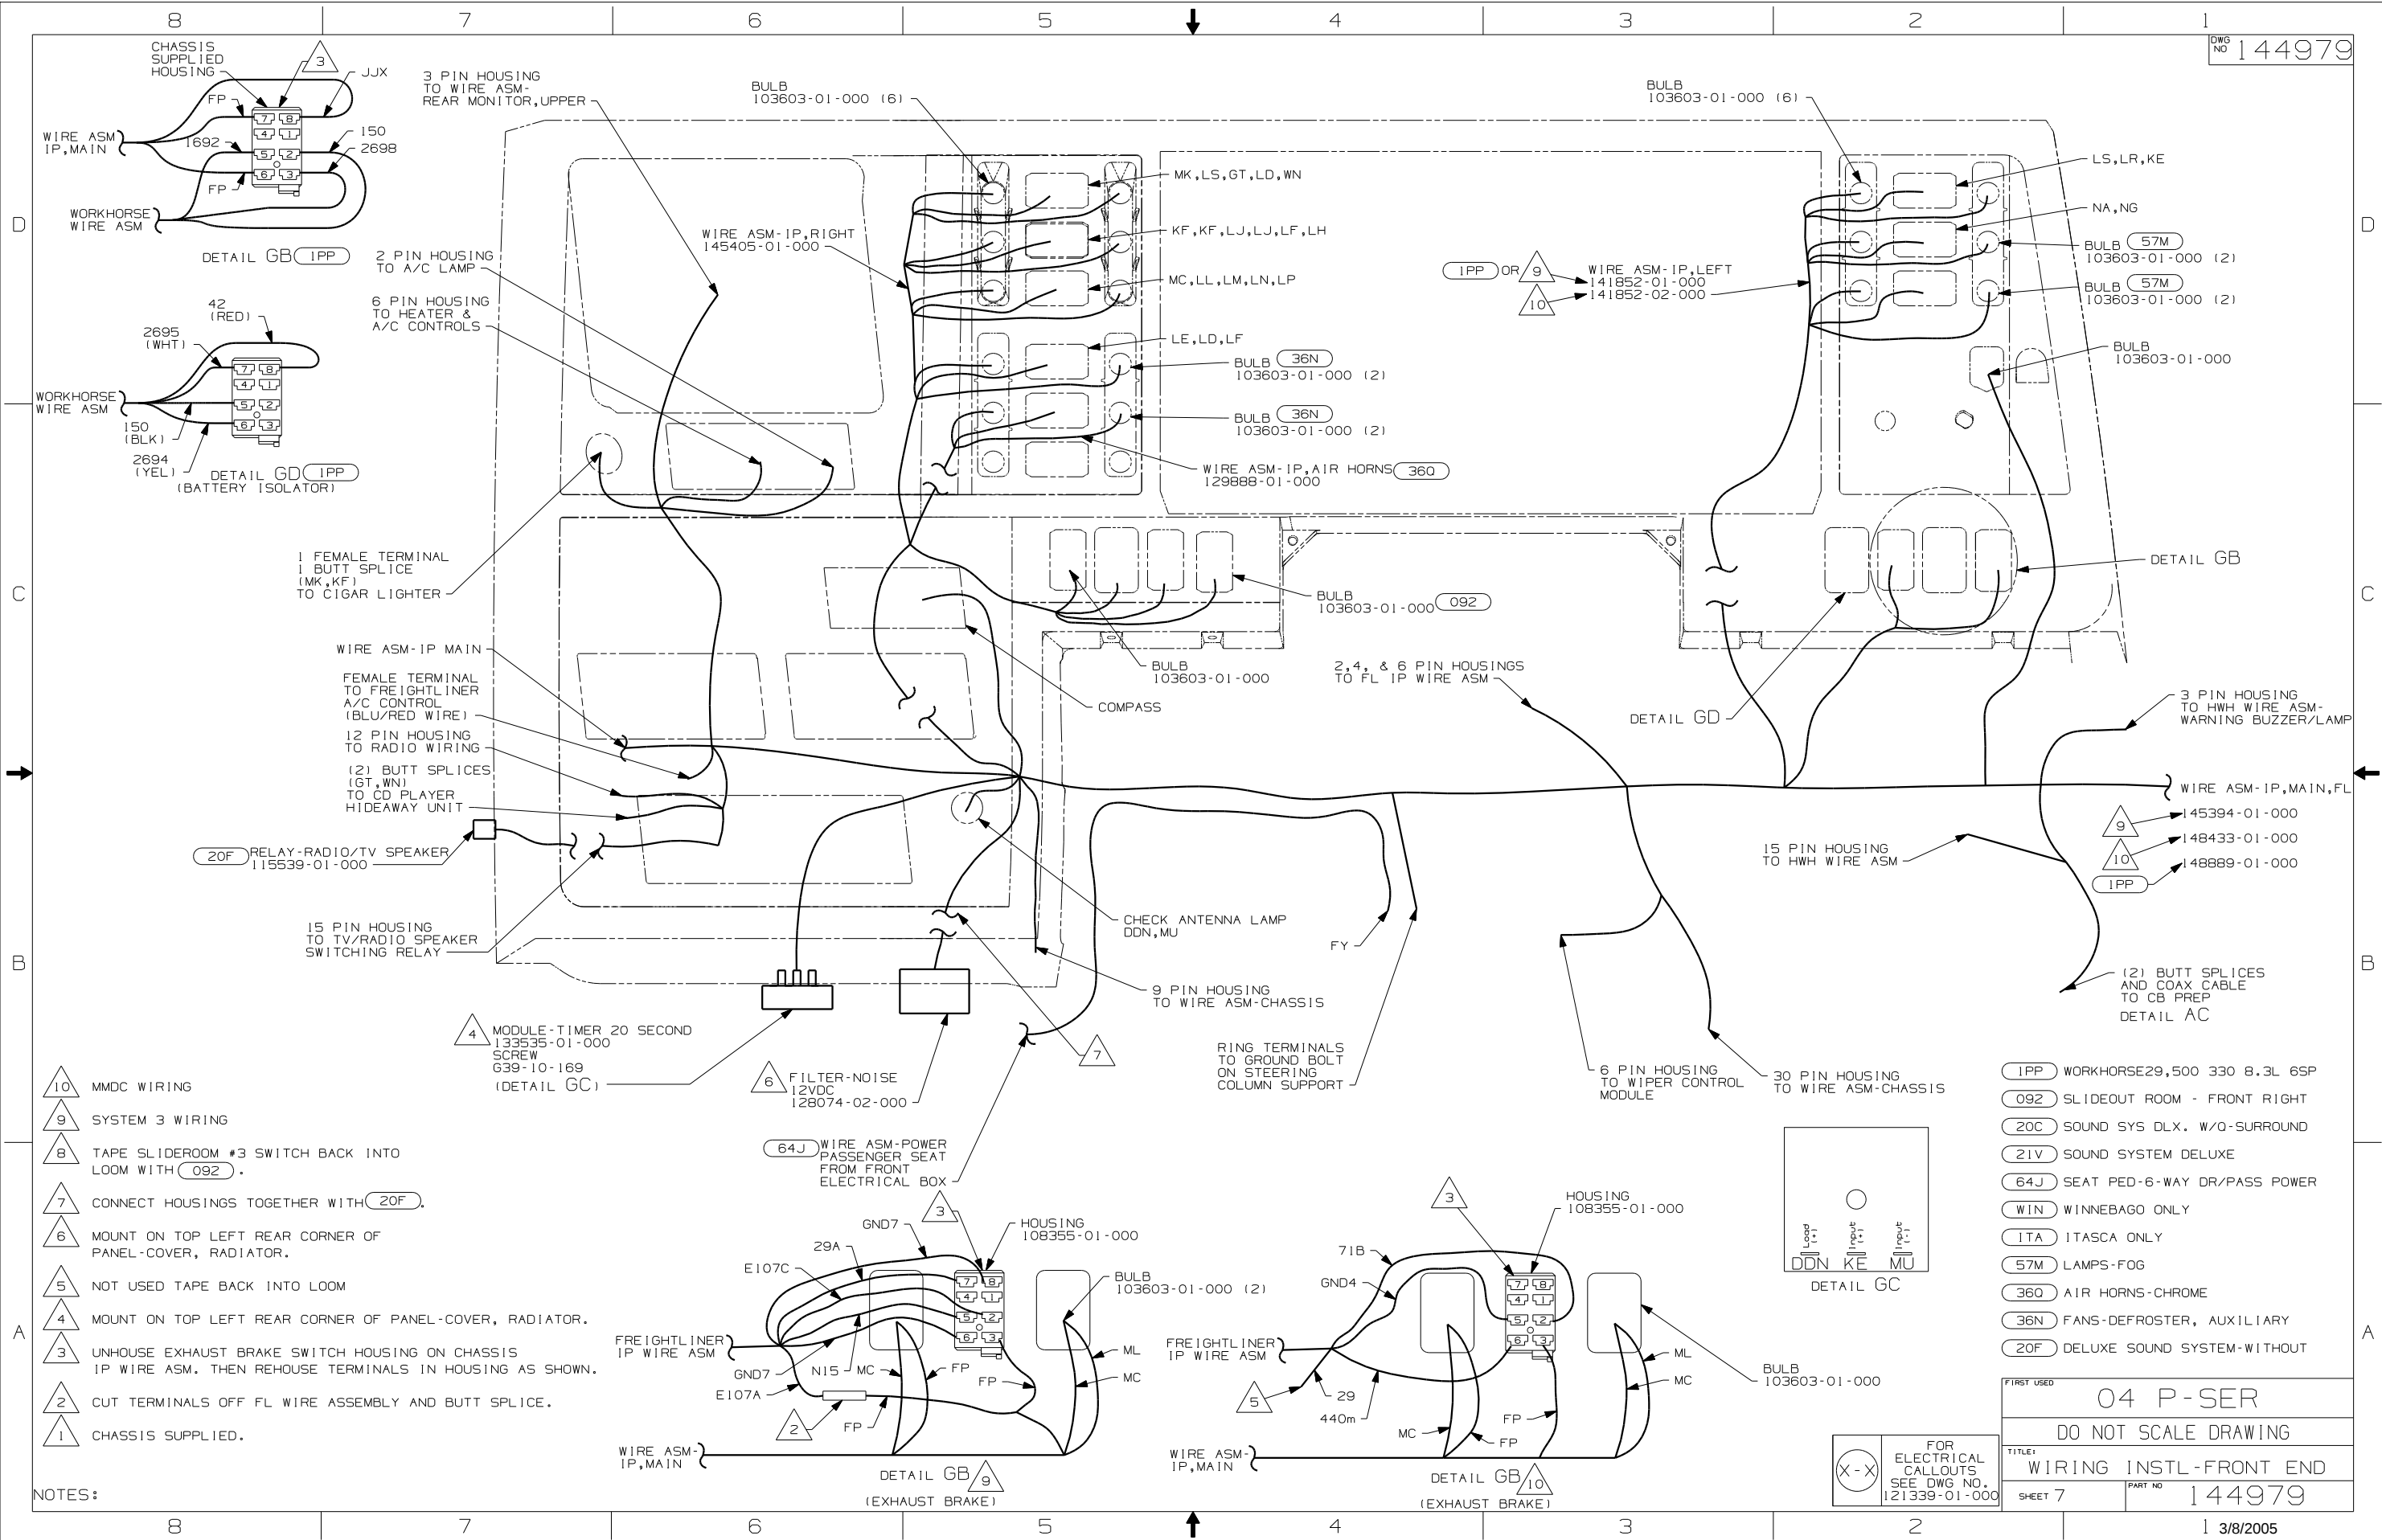

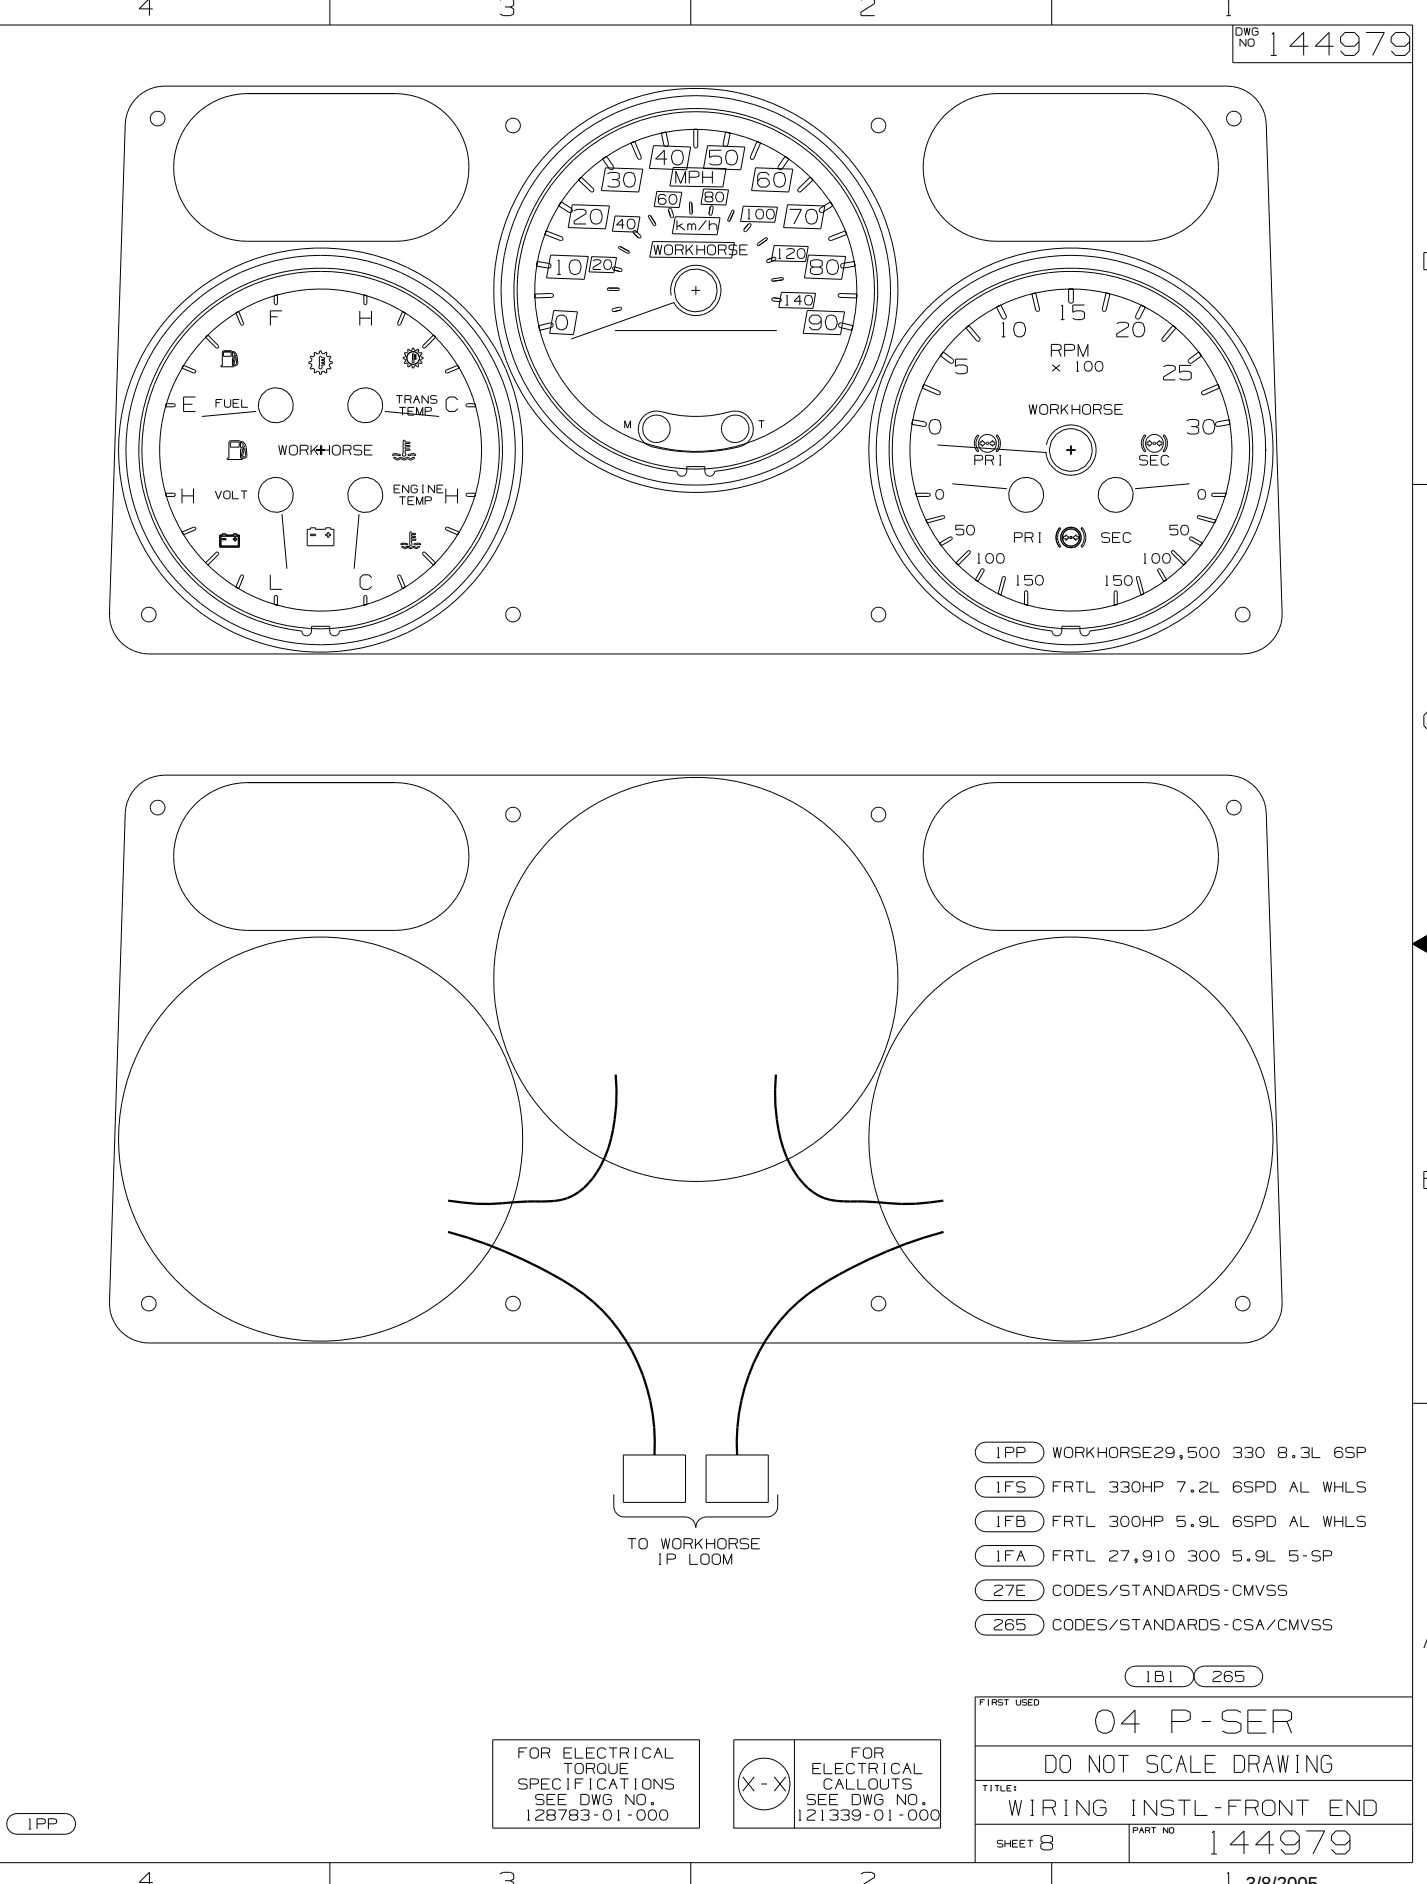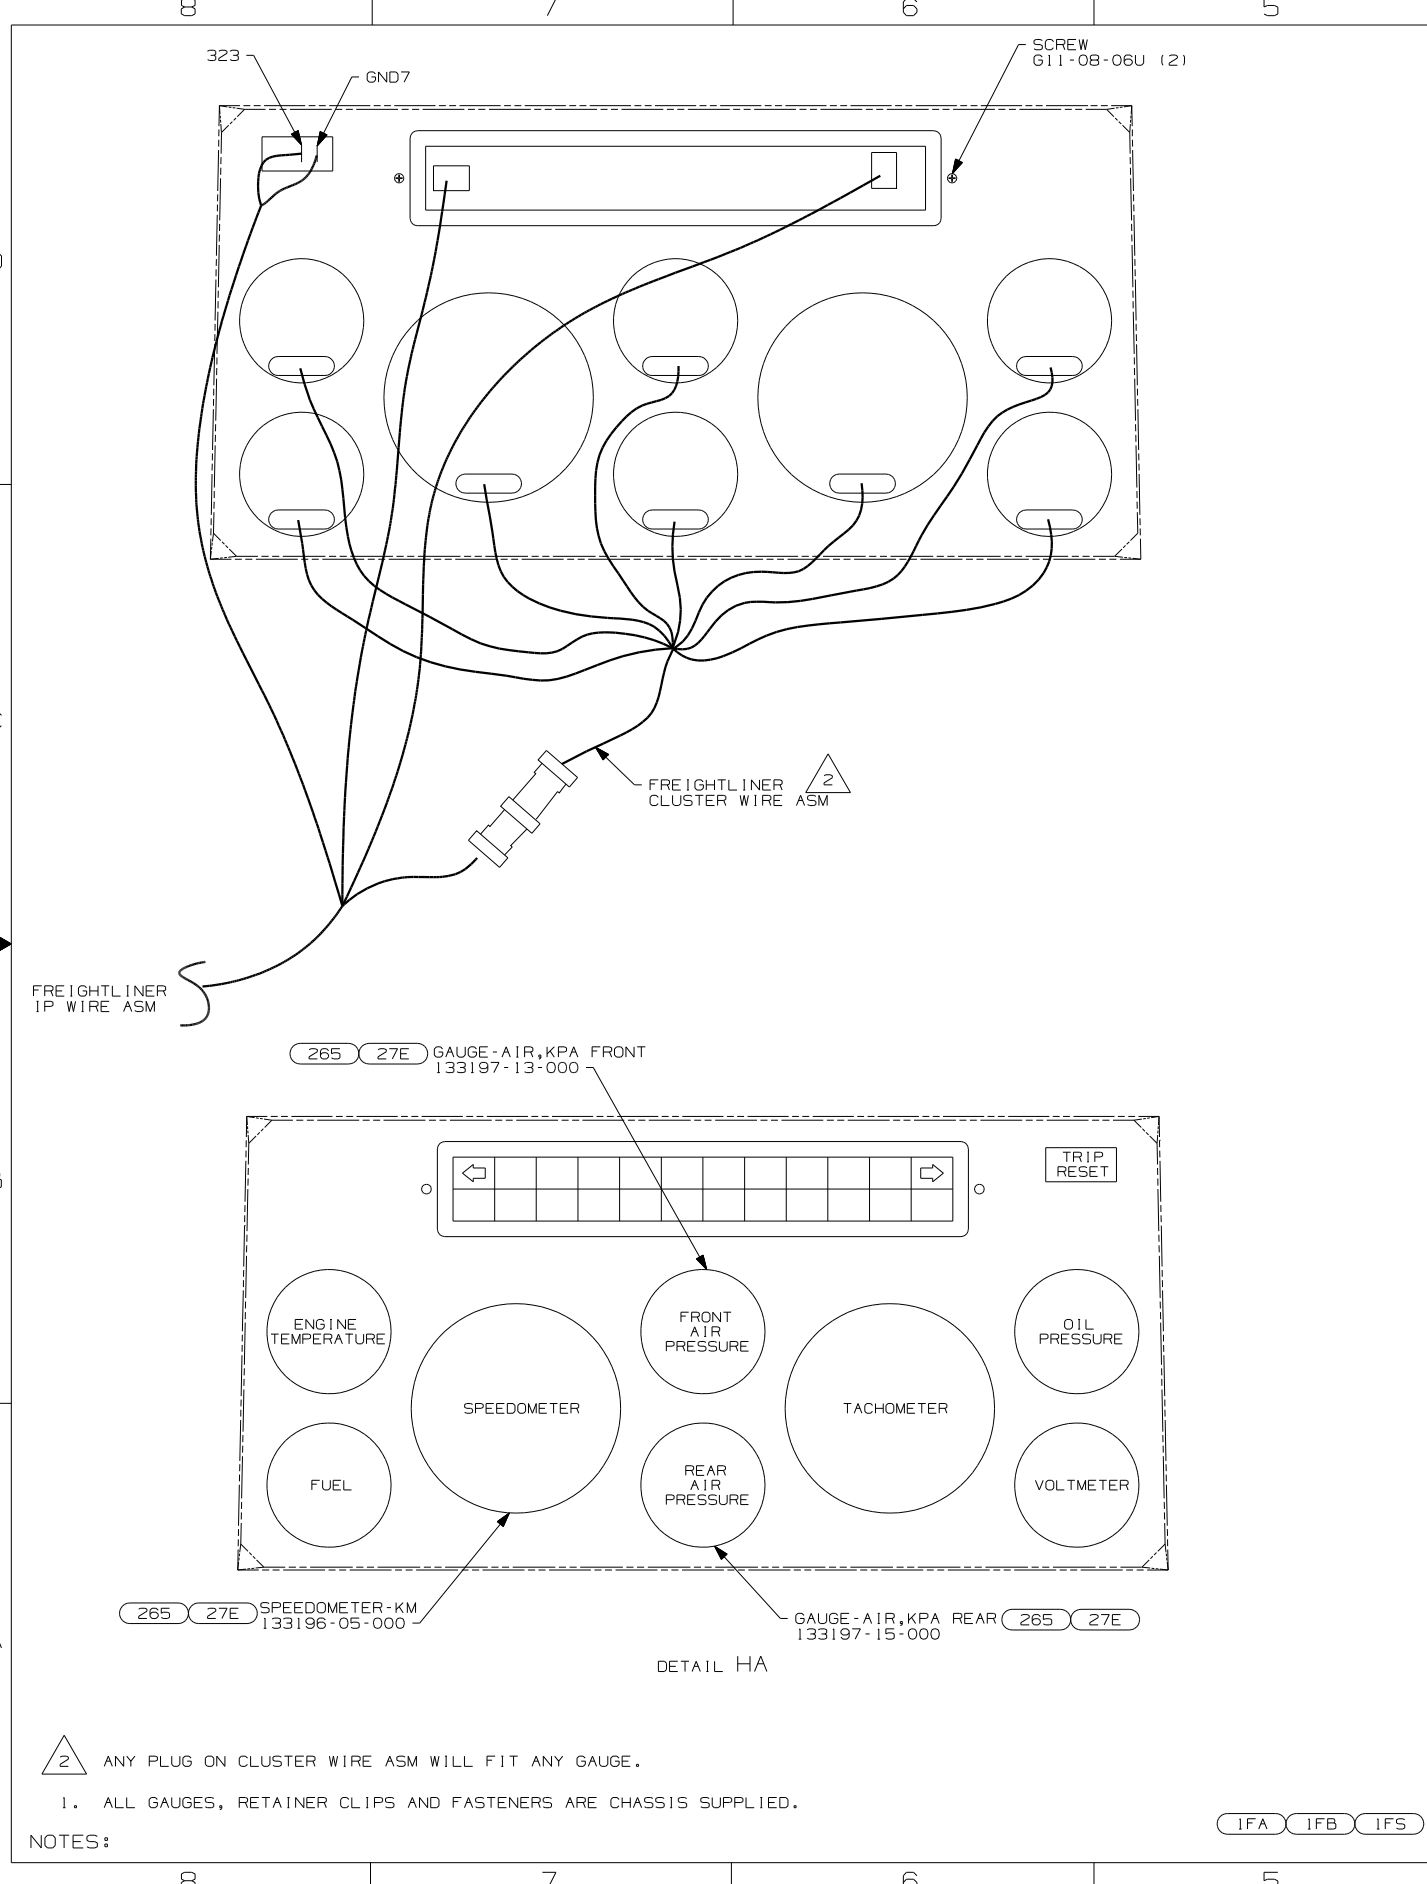

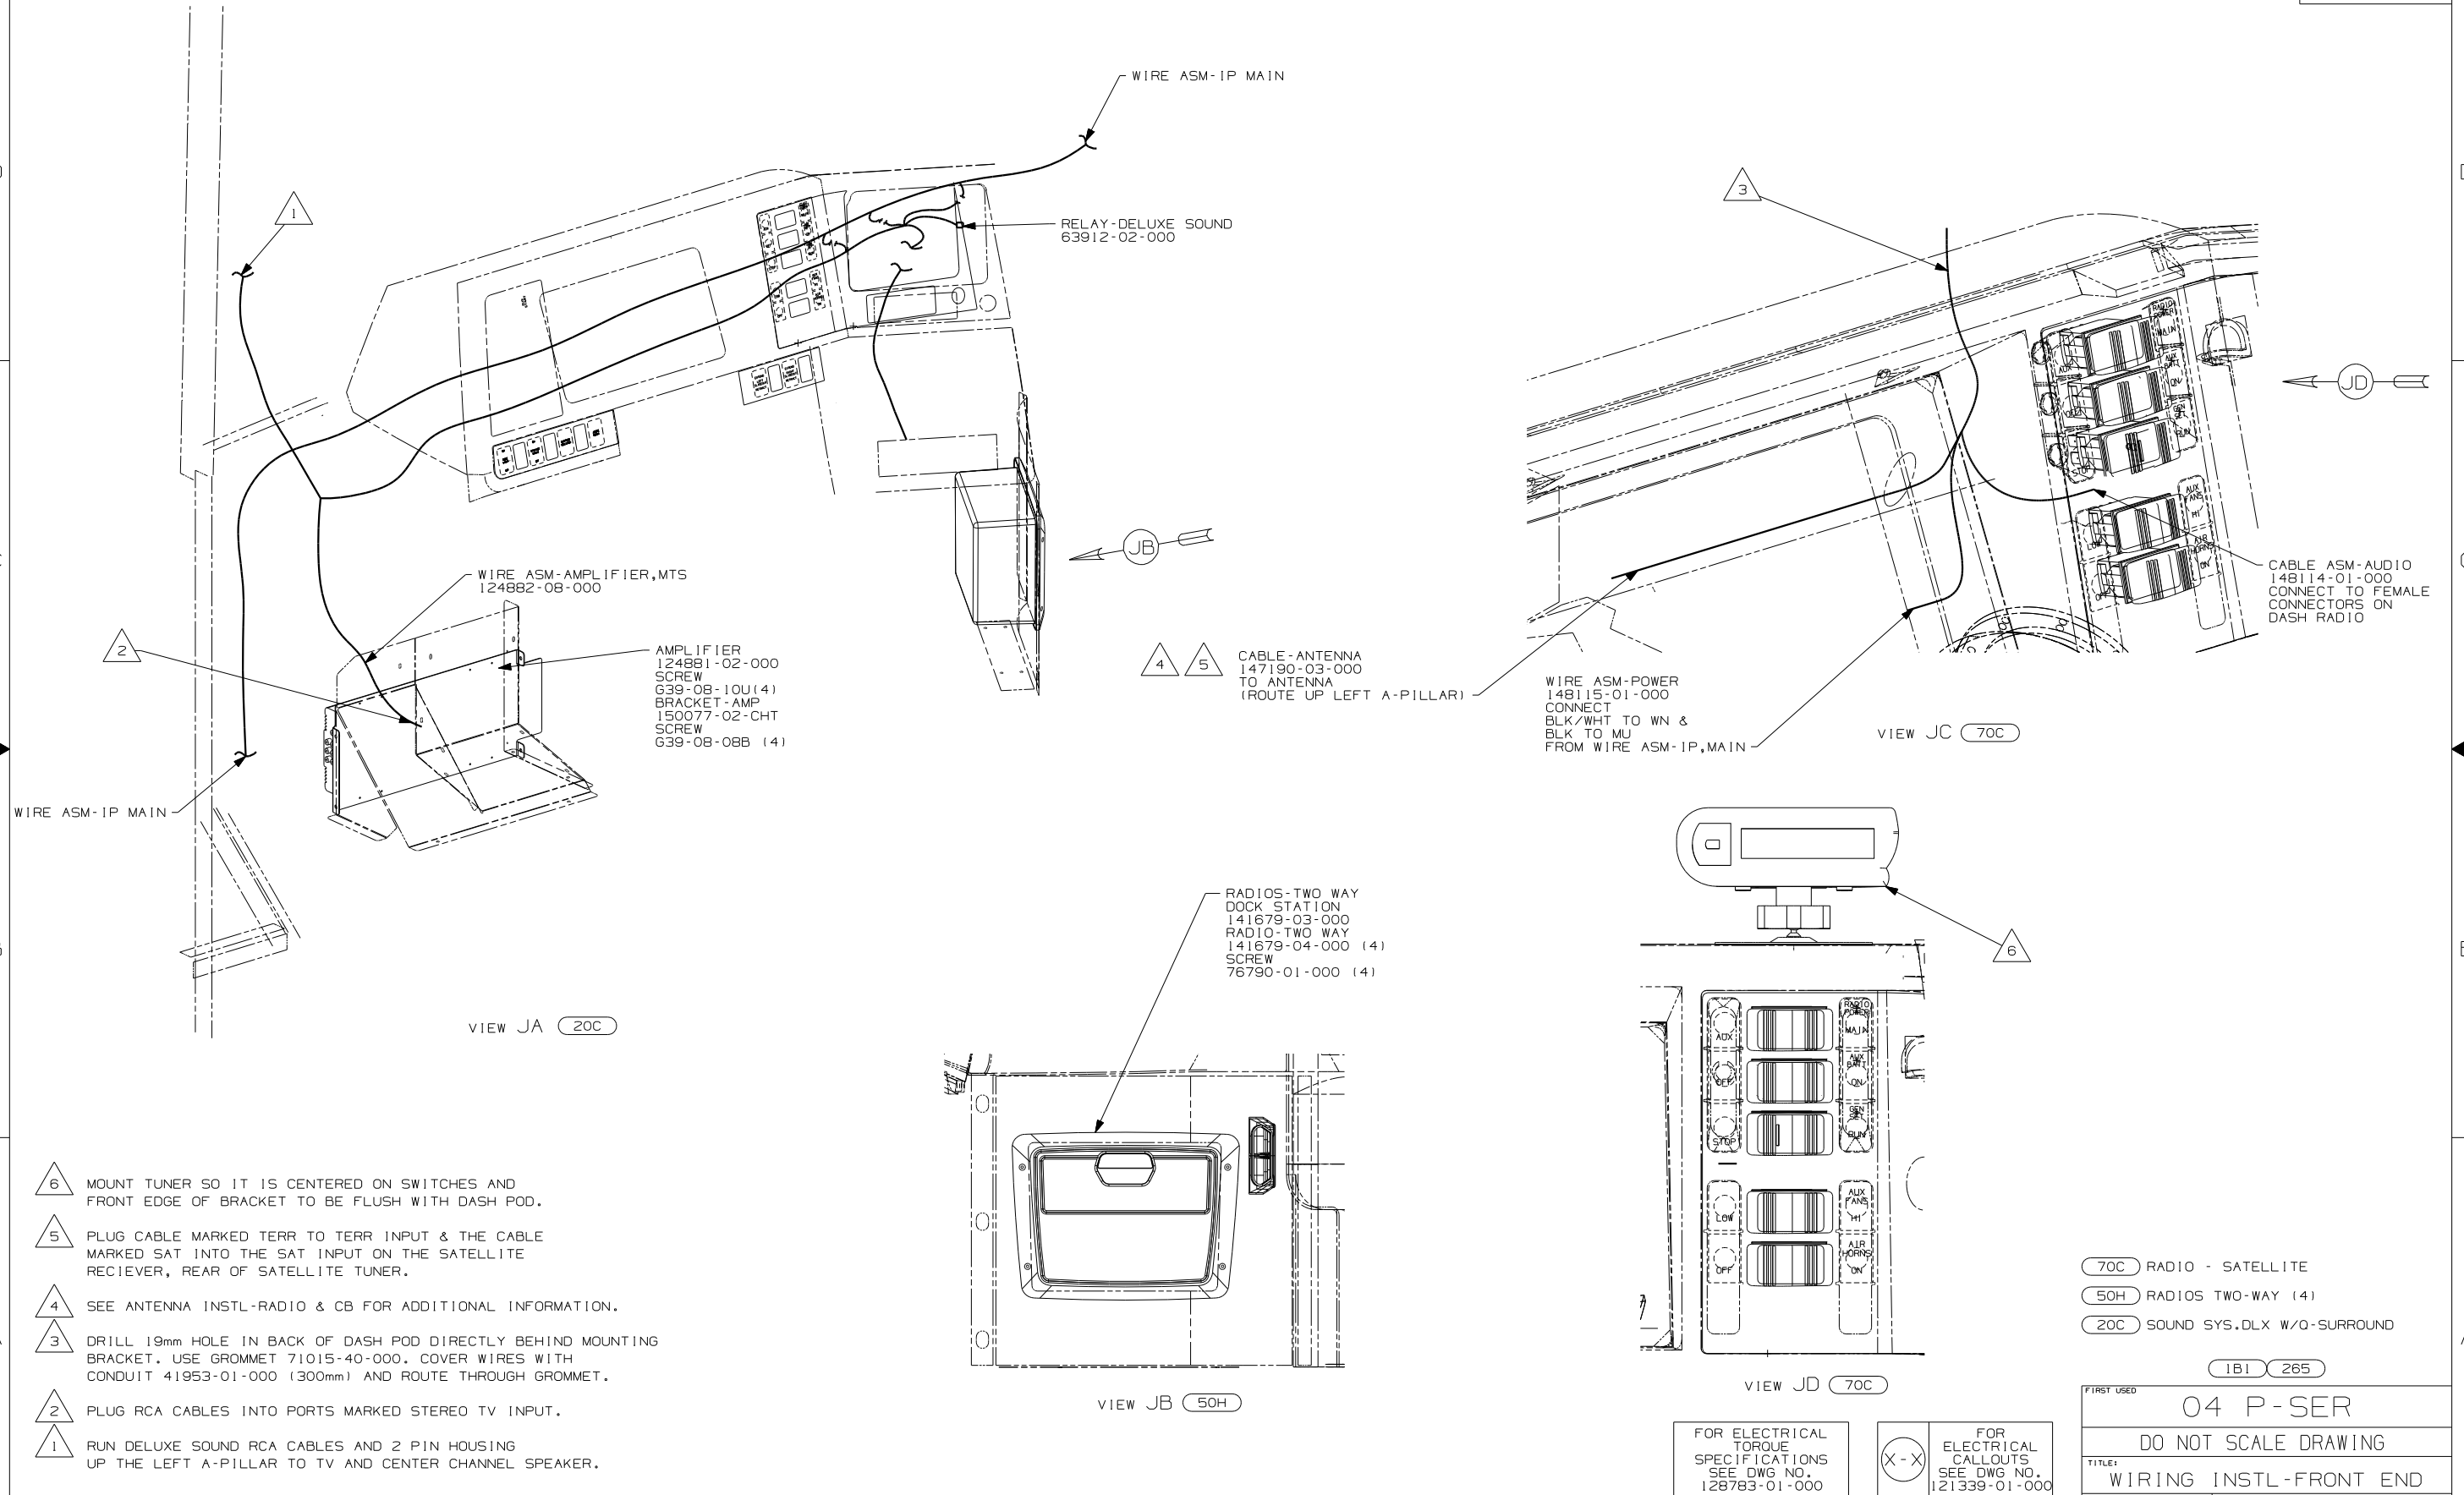


- NOTES:
- 6 MOUNT TUNER SO IT IS CENTERED ON SWITCHES AND FRONT EDGE OF BRACKET TO BE FLUSH WITH DASH POD.
 - 5 PLUG CABLE MARKED TERR TO TERR INPUT & THE CABLE MARKED SAT INTO THE SAT INPUT ON THE SATELLITE RECIEVER, REAR OF SATELLITE TUNER.
 - 4 SEE ANTENNA INSTL-RADIO & CB FOR ADDITIONAL INFORMATION.
 - 3 DRILL 19mm HOLE IN BACK OF DASH POD DIRECTLY BEHIND MOUNTING BRACKET. USE GROMMET 71015-40-000. COVER WIRES WITH CONDUIT 41953-01-000 (300mm) AND ROUTE THROUGH GROMMET.
 - 2 PLUG RCA CABLES INTO PORTS MARKED STEREO TV INPUT.
 - 1 RUN DELUXE SOUND RCA CABLES AND 2 PIN HOUSING UP THE LEFT A-PILLAR TO TV AND CENTER CHANNEL SPEAKER.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 70C RADIO - SATELLITE
- 50H RADIOS TWO-WAY (4)
- 20C SOUND SYS.DLX W/O-SURROUND

FIRST USED		IB1	265
TITLE:		04 P-SER	
		DO NOT SCALE DRAWING	
SHEET 9		PART NO 144979	
		1 3/8/2005	

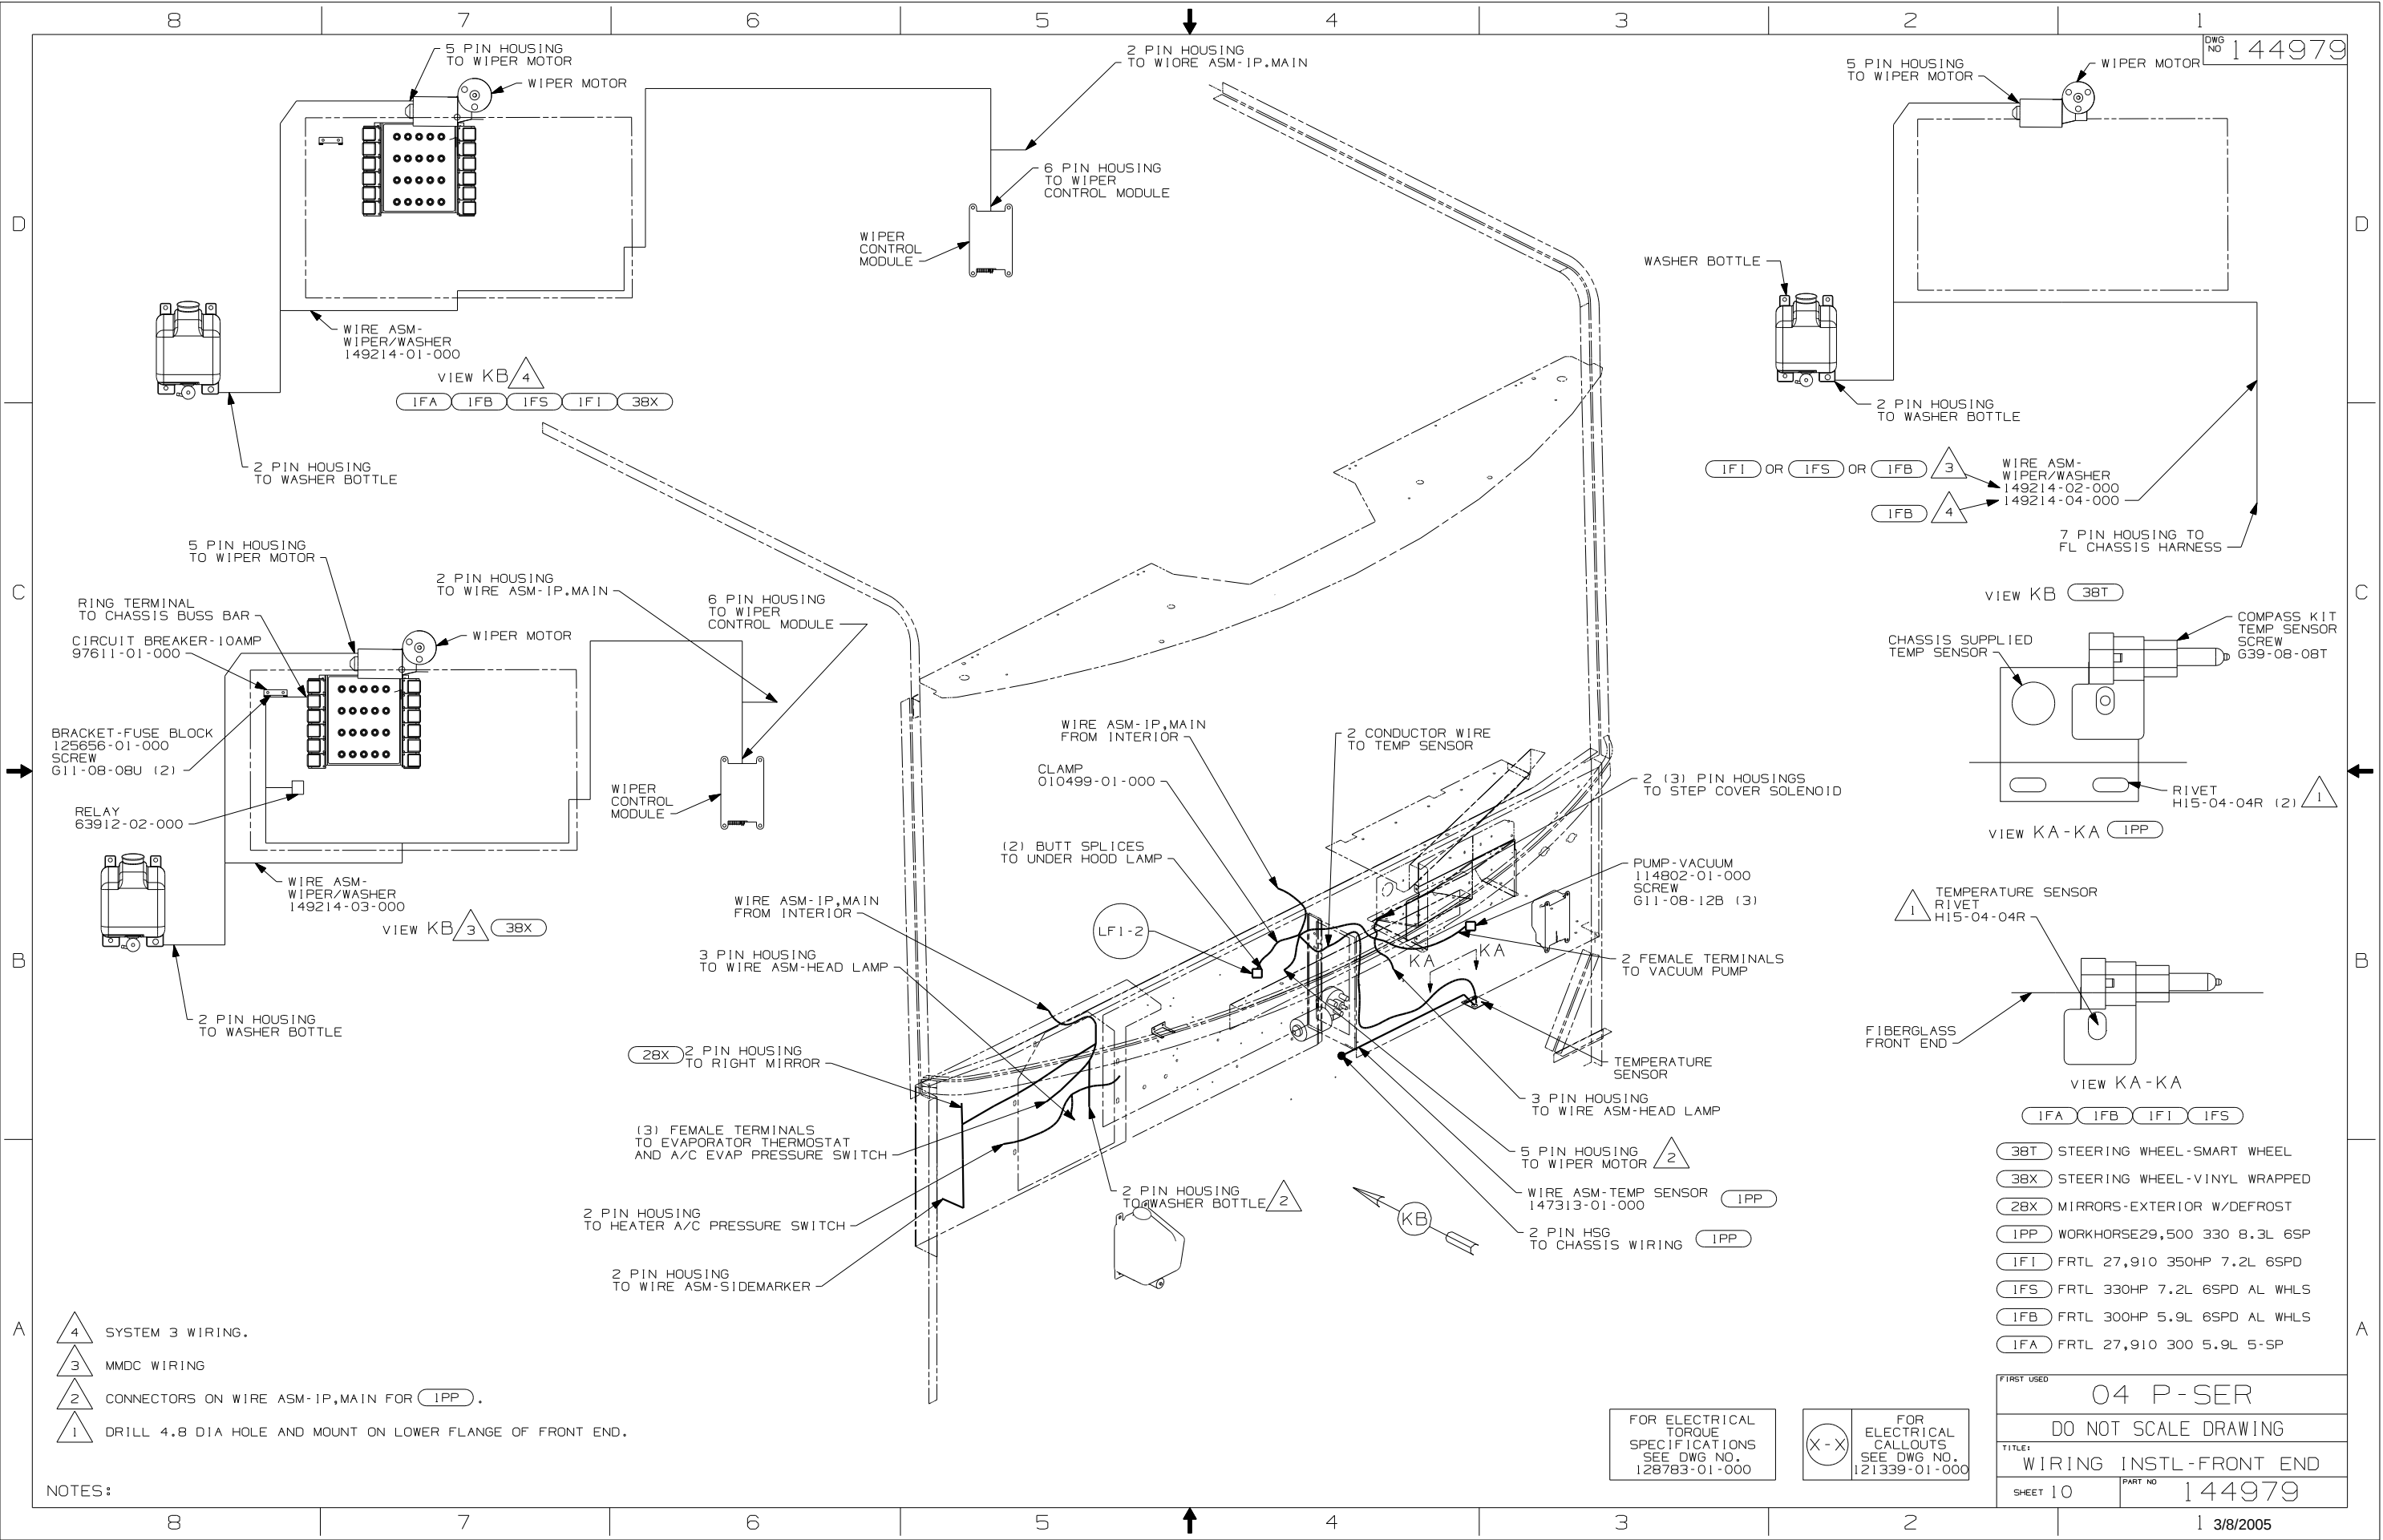

DWG NO 144979

- 4 SYSTEM 3 WIRING.
- 3 MMDC WIRING
- 2 CONNECTORS ON WIRE ASM-IP,MAIN FOR IPP.
- 1 DRILL 4.8 DIA HOLE AND MOUNT ON LOWER FLANGE OF FRONT END.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		04 P-SER	
		DO NOT SCALE DRAWING	
TITLE:		WIRING INSTL-FRONT END	
SHEET 10	PART NO	144979	
		1 3/8/2005	

- 38T STEERING WHEEL-SMART WHEEL
- 38X STEERING WHEEL-VINYL WRAPPED
- 28X MIRRORS-EXTERIOR W/DEFROST
- IPP WORKHORSE29,500 330 8.3L 6SP
- IFI FRTL 27,910 350HP 7.2L 6SPD
- IFS FRTL 330HP 7.2L 6SPD AL WHLS
- IFB FRTL 300HP 5.9L 6SPD AL WHLS
- IFA FRTL 27,910 300 5.9L 5-SP