




DANGER


Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

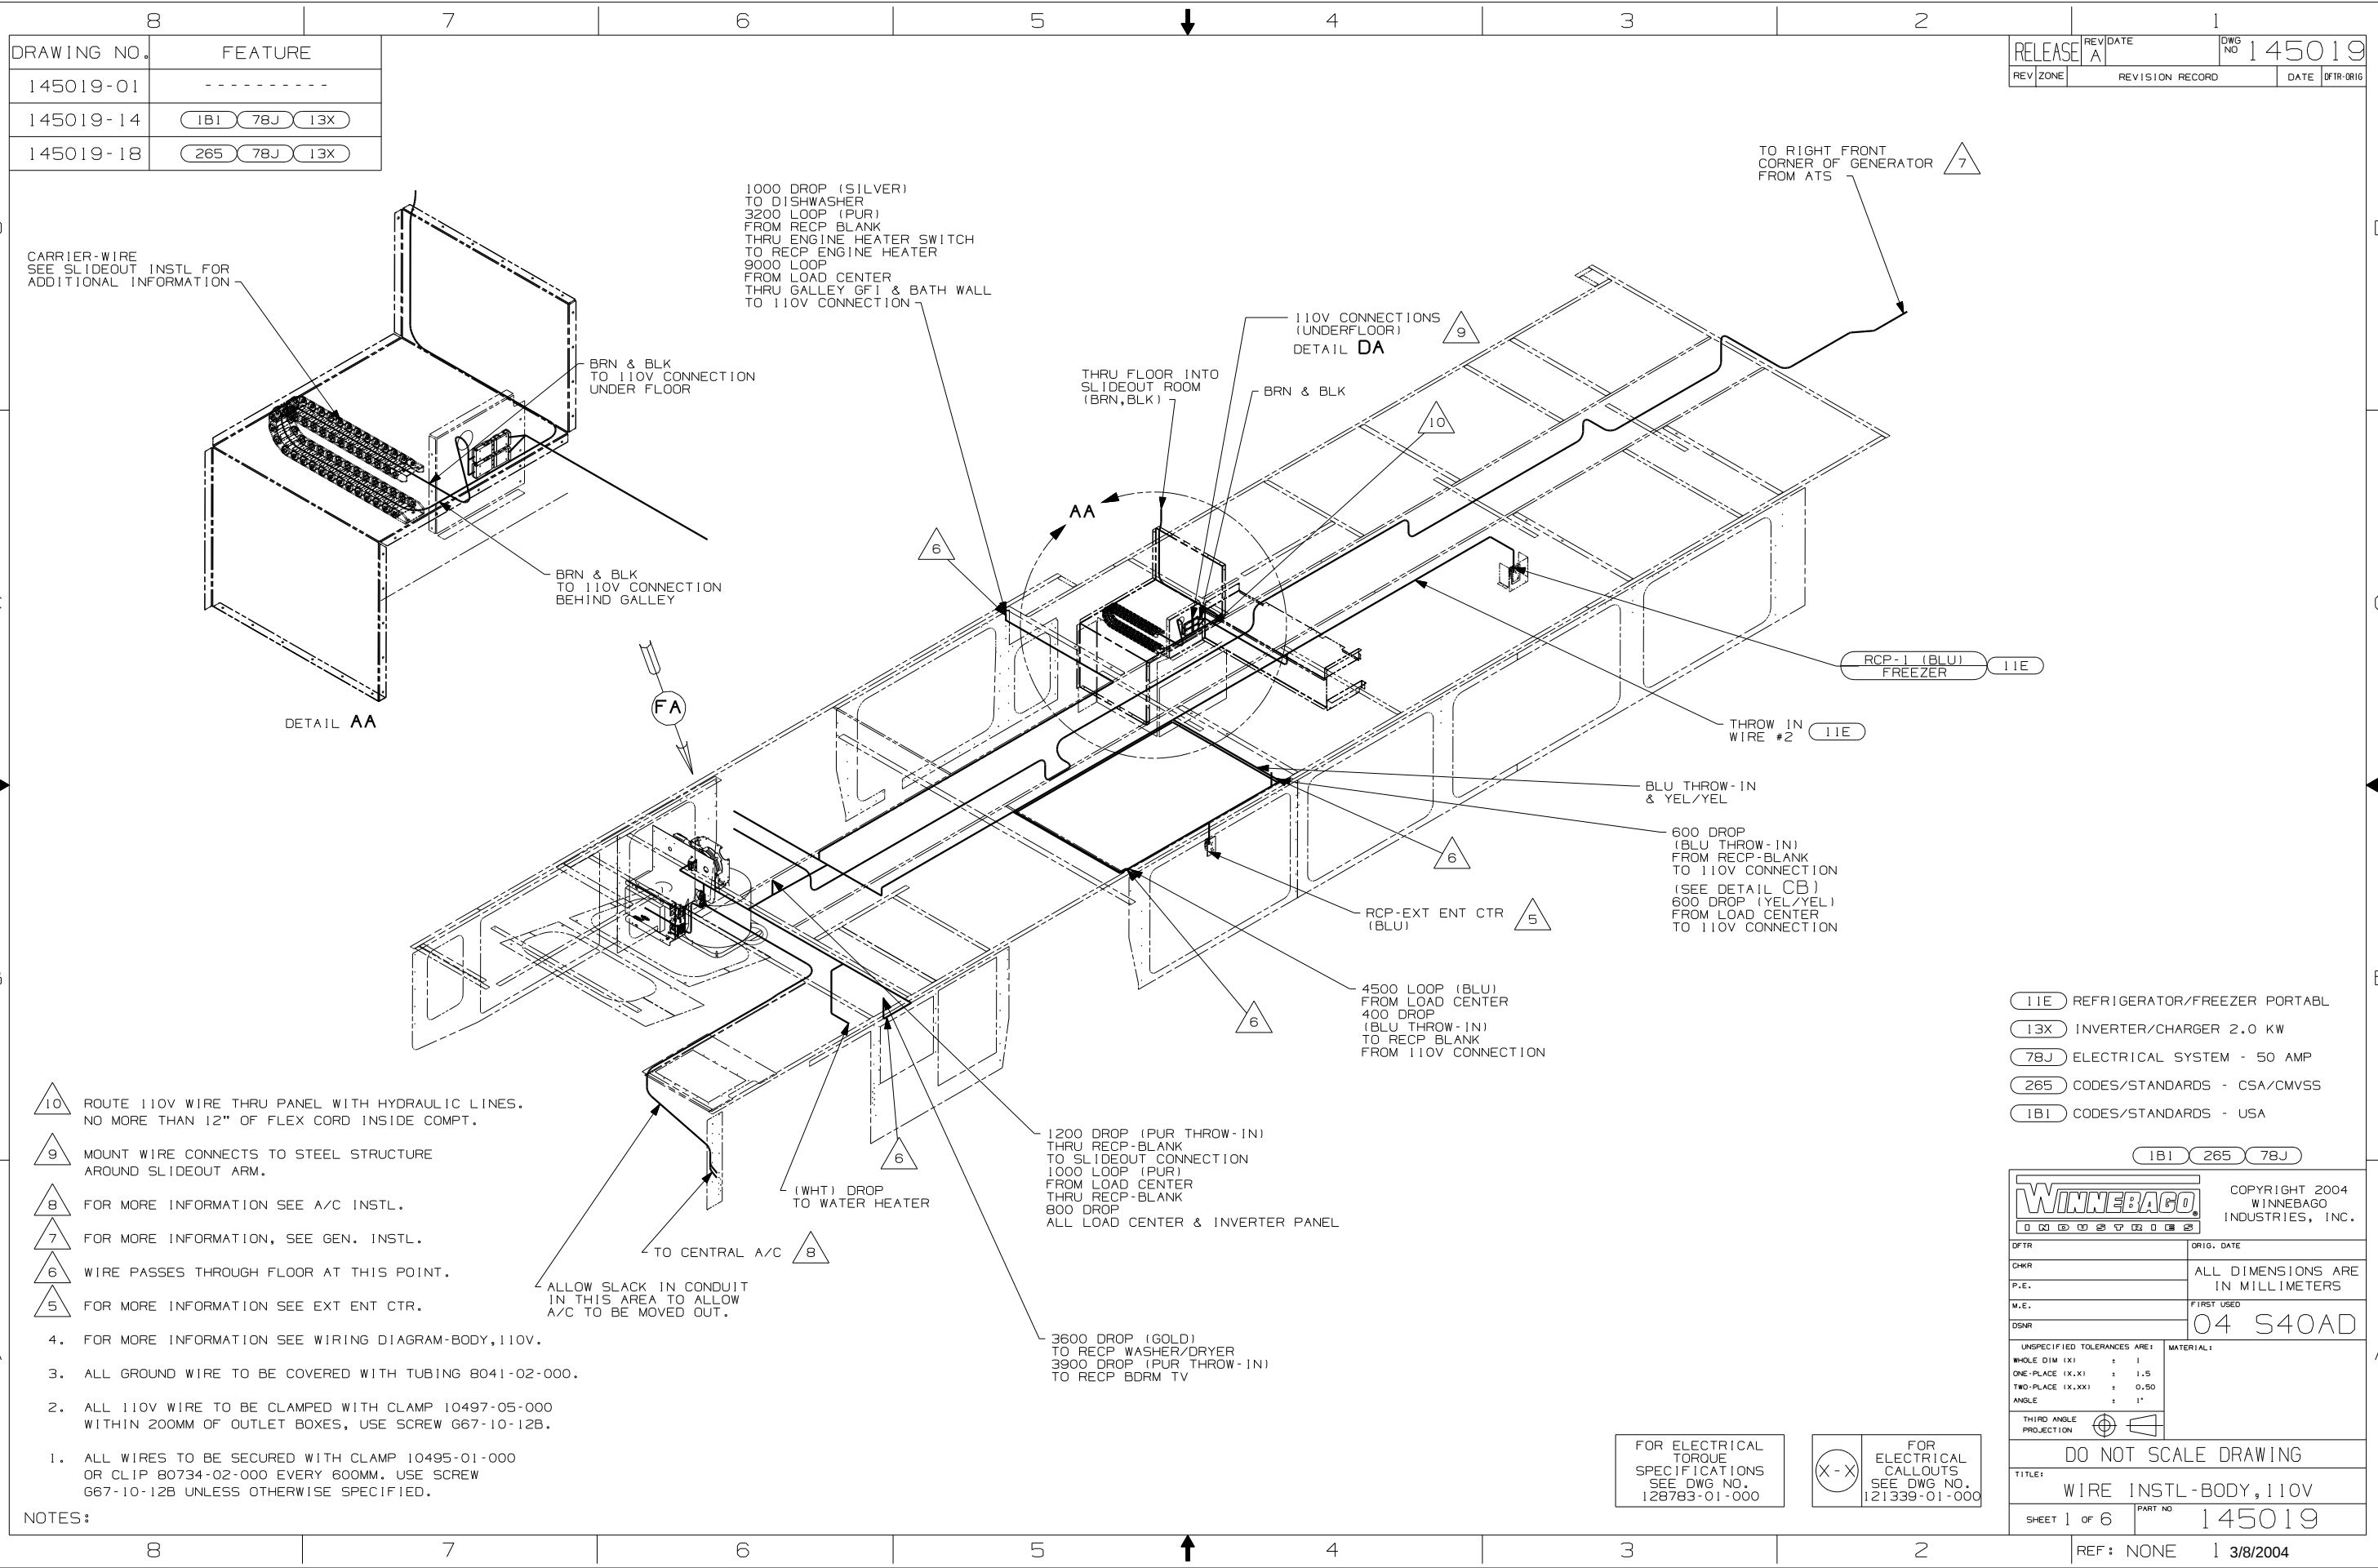

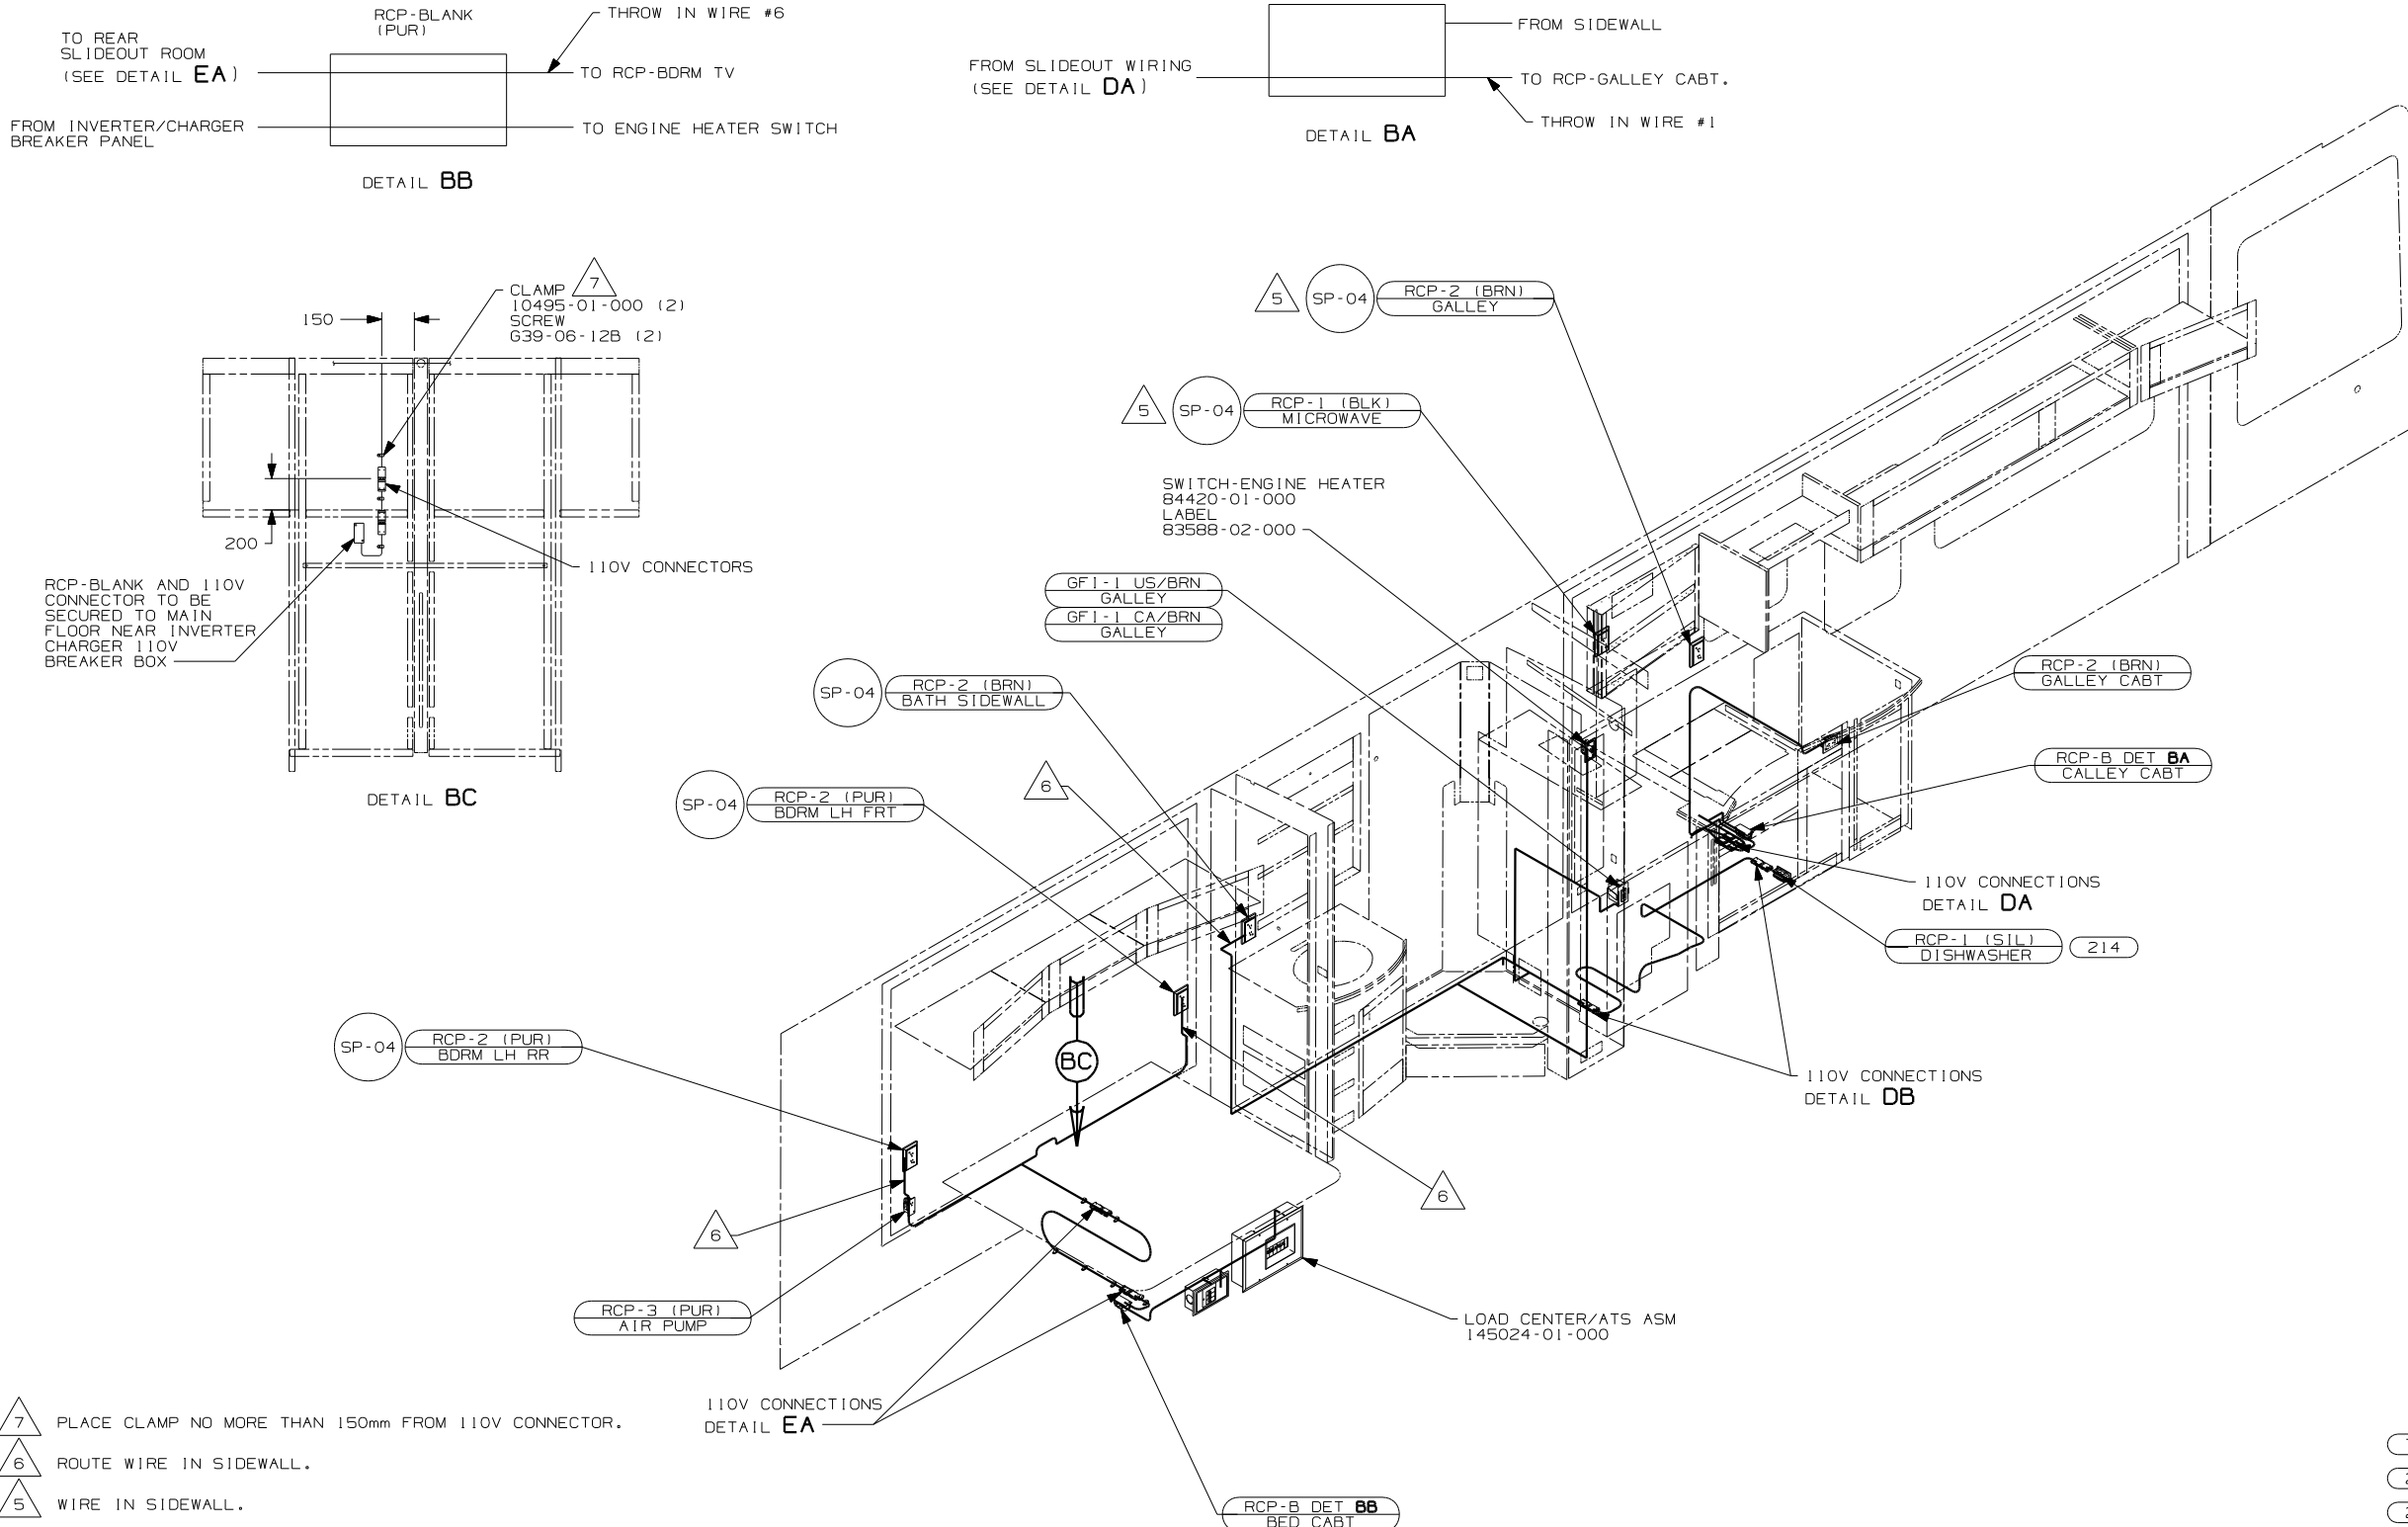

- 7 PLACE CLAMP NO MORE THAN 150mm FROM 110V CONNECTOR.
- 6 ROUTE WIRE IN SIDEWALL.
- 5 WIRE IN SIDEWALL.
4. FOR MORE INFORMATION SEE WIRING DIAGRAM-BODY,110V.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-02-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.






NOTES:

- 78J ELECTRICAL SYTEM - 50 AMP
- 214 DISHWASHER DRAWER STYLE
- 265 CODES/STANDARDS - CSA/CMVSS
- 1B1 CODES/STANDARDS - USA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		04 S40AD
DO NOT SCALE DRAWING		
TITLE:		WIRE INSTL-BODY,110V
SHEET 2	PART NO	145019

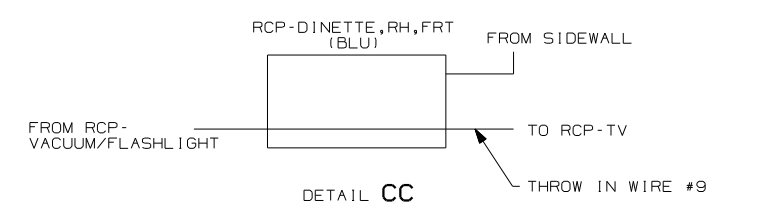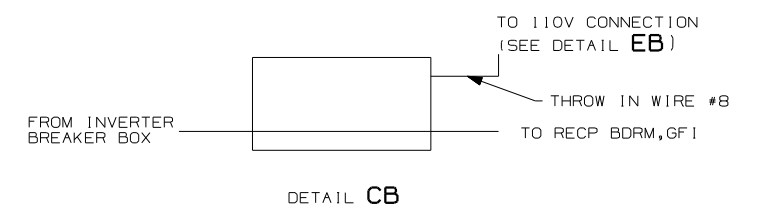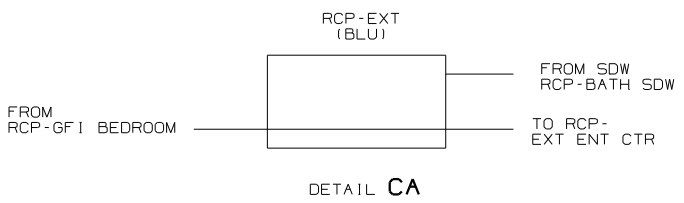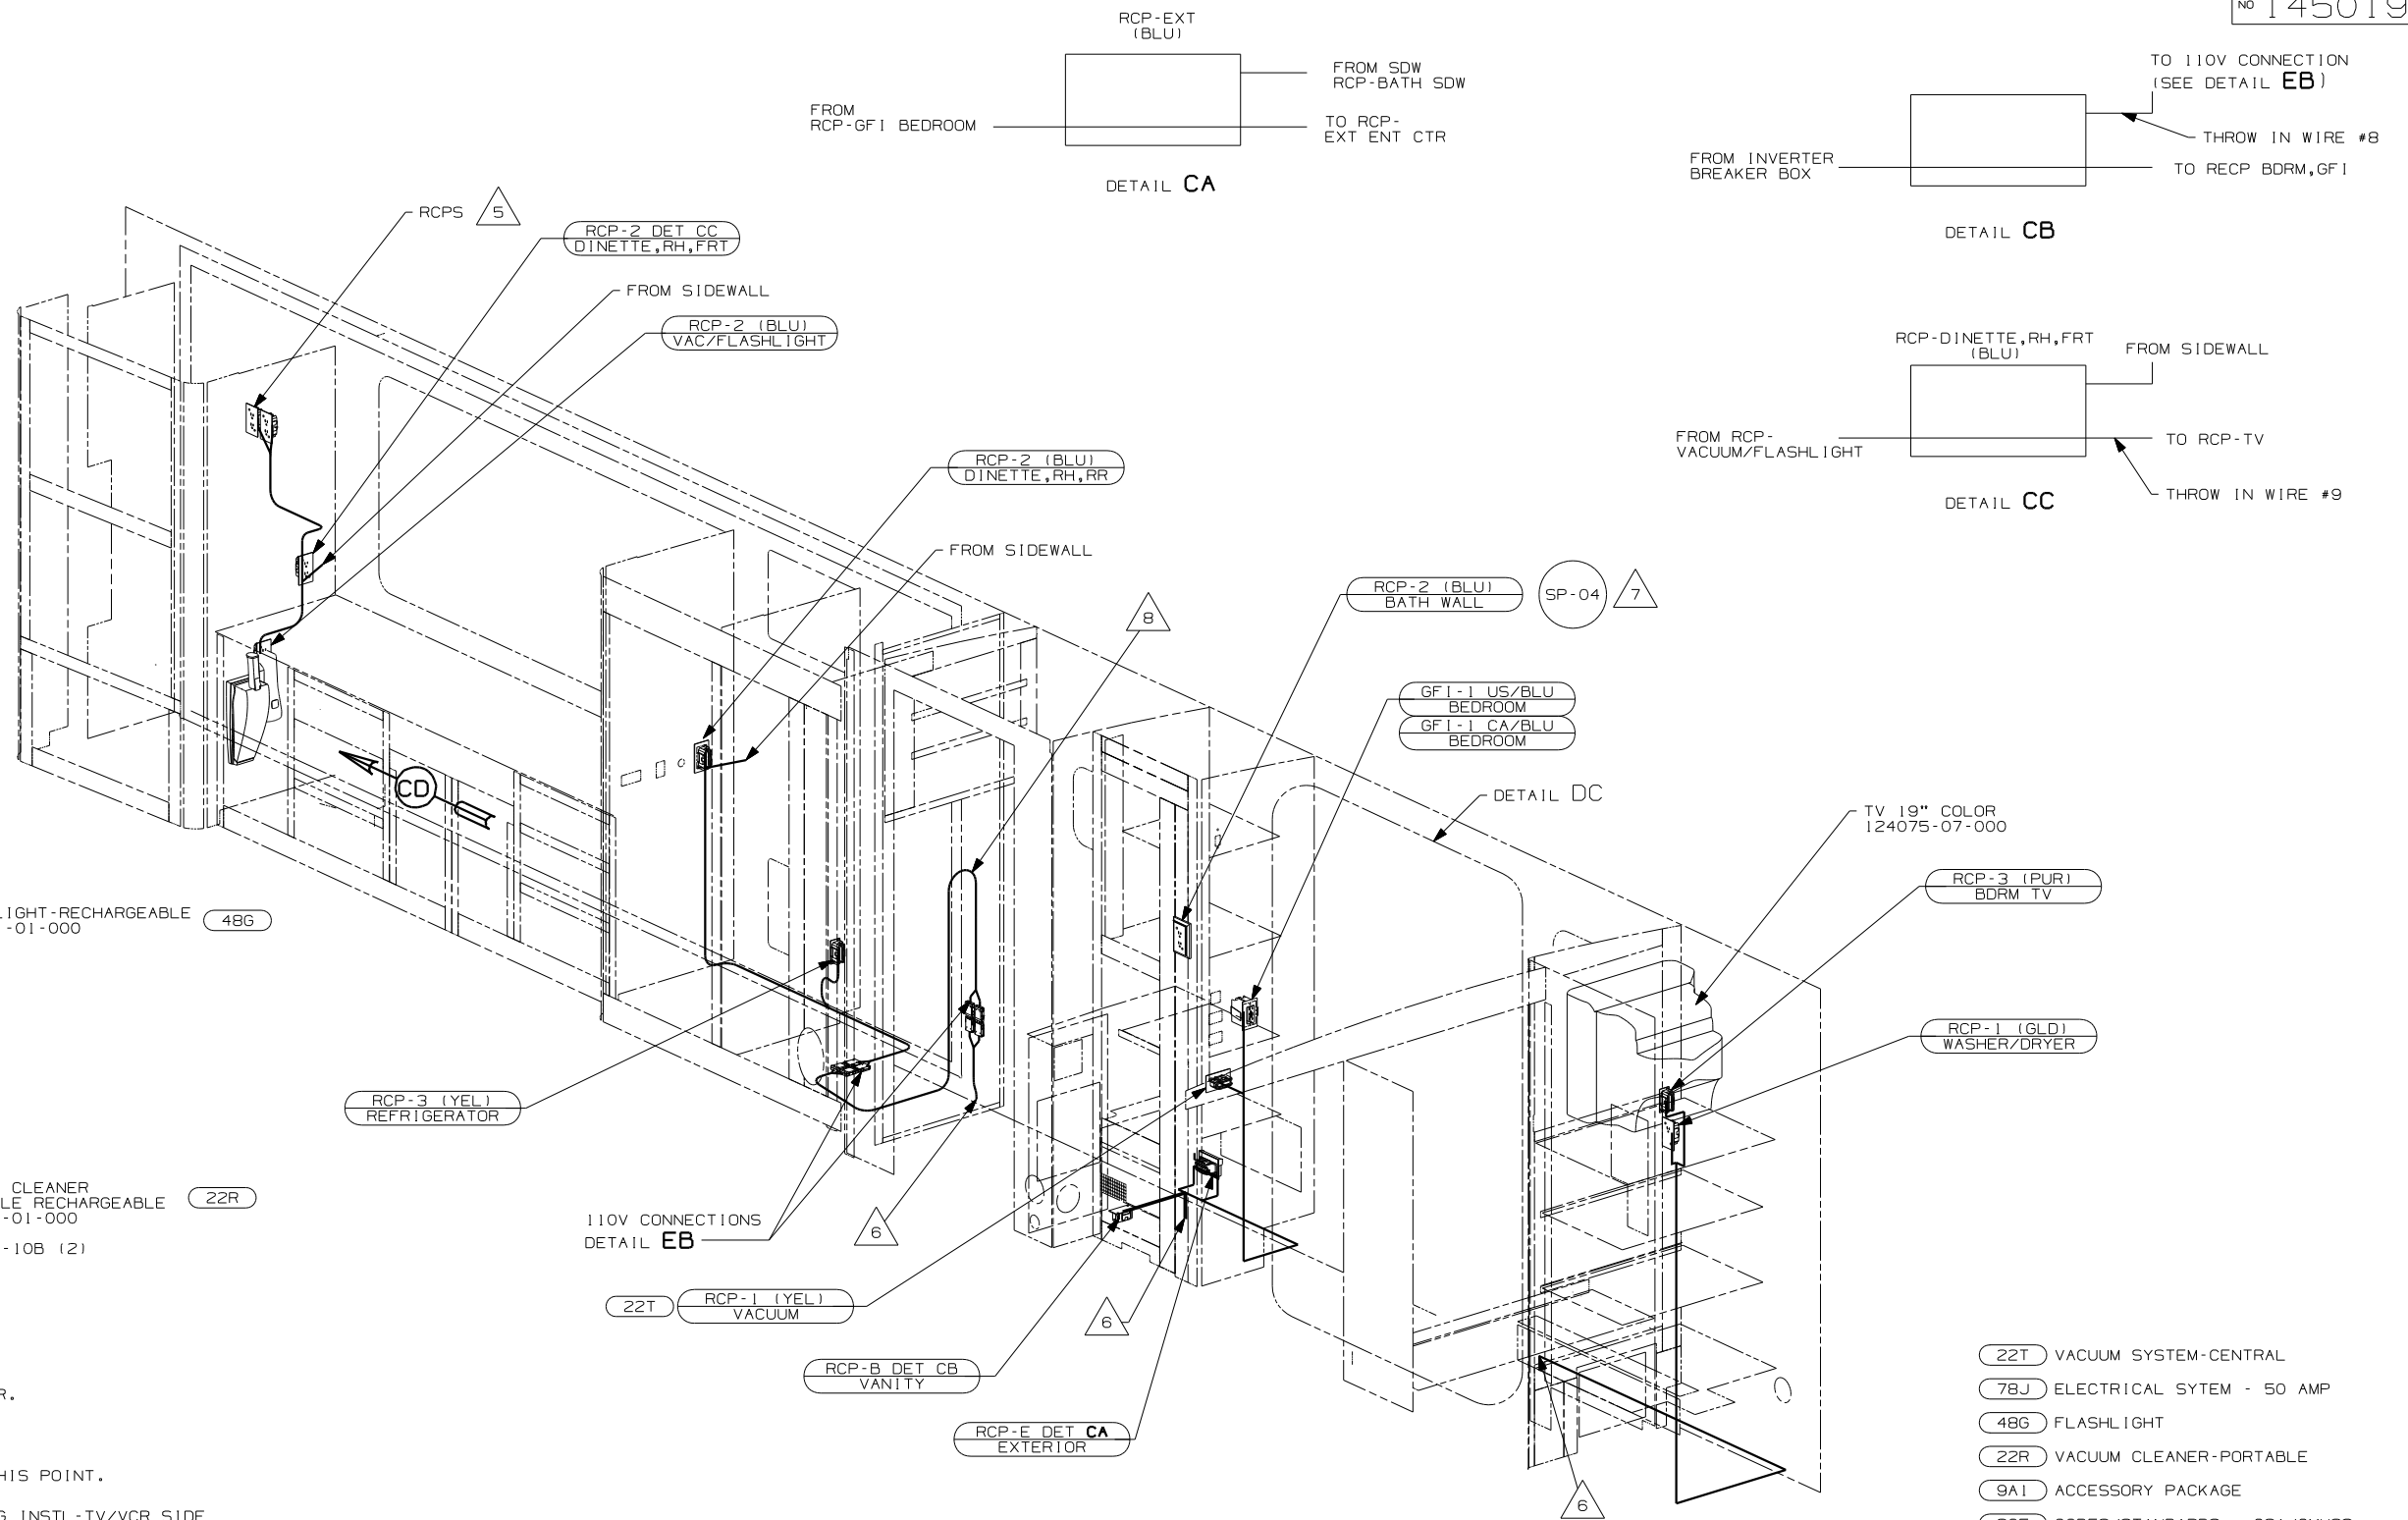


- NOTES:
1. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-02-000 EVERY 600MM. USE SCREW 667-10-12B UNLESS OTHERWISE SPECIFIED.
 2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW 667-10-12B.
 3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 4. FOR MORE INFORMATION SEE WIRING DIAGRAM-BODY, 110V.
- △ 8 ROUTE WIRE THROUGH WIRE CARRIER.
 △ 7 WIRE IN SIDEWALL.
 △ 6 WIRE ROUTED THROUGH FLOOR AT THIS POINT.
 △ 5 FOR MORE INFORMATION SEE WIRING INSTL-TV/VCR SIDE

- 22T VACUUM SYSTEM-CENTRAL
- 78J ELECTRICAL SYTEM - 50 AMP
- 48G FLASHLIGHT
- 22R VACUUM CLEANER-PORTABLE
- 9A1 ACCESSORY PACKAGE
- 265 CODES/STANDARDS - CSA/CMVSS
- 1B1 CODES/STANDARDS - USA


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


FIRST USED	04 S40AD
TITLE	DO NOT SCALE DRAWING
	WIRE INSTL-BODY, 110V
SHEET 3	PART NO 145019
	1 3/8/2004

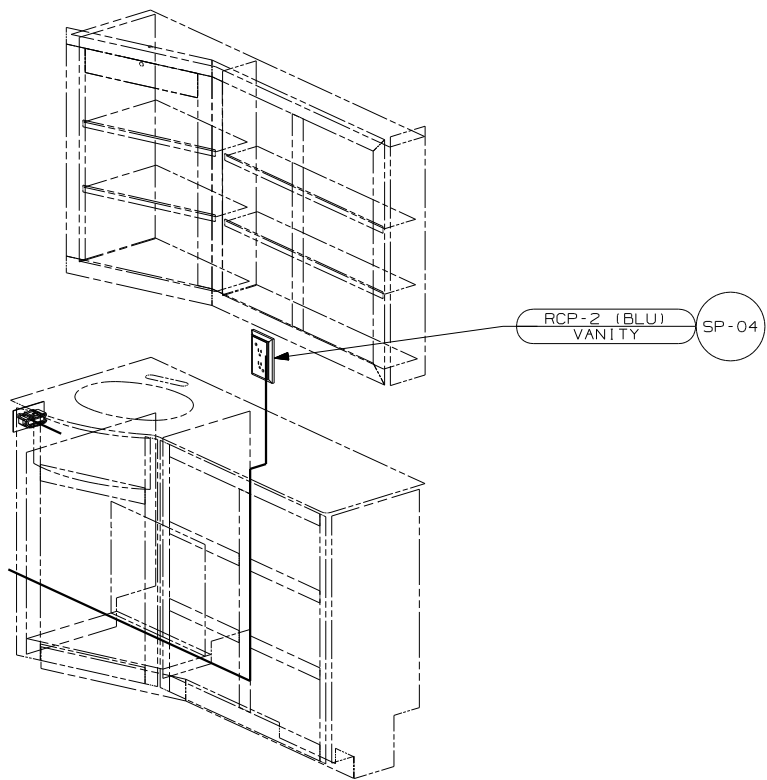


DETAIL DC 43W

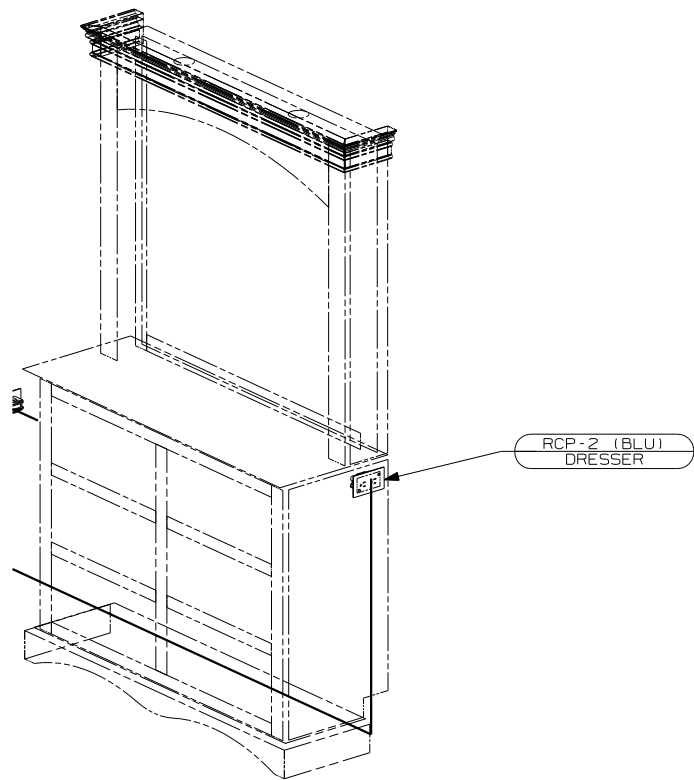

DETAIL DC 43V

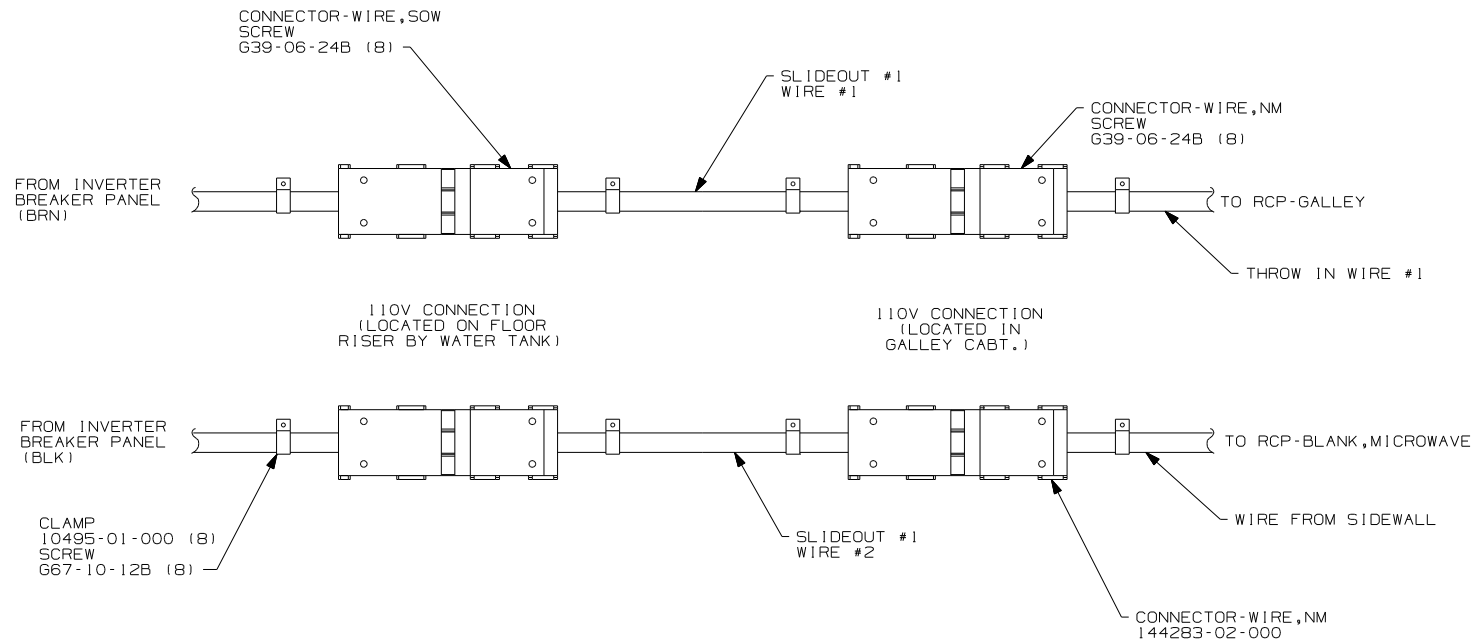

DETAIL DA

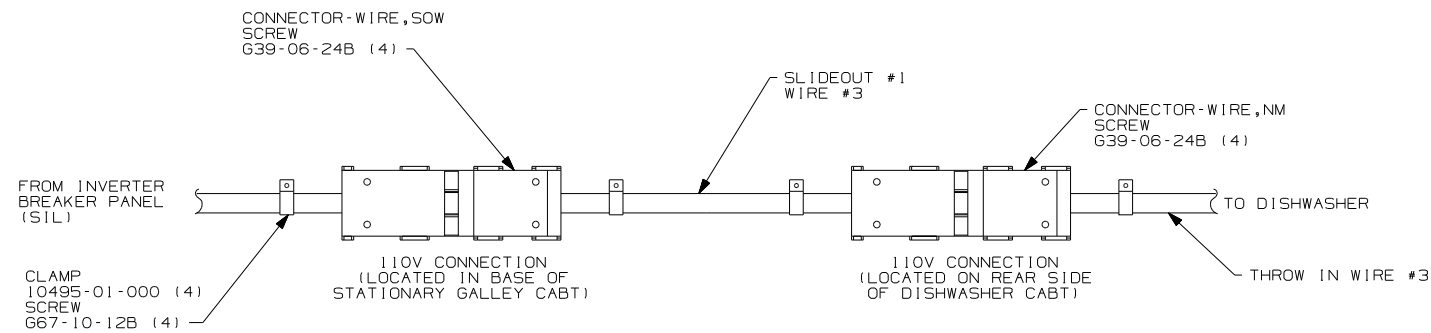


DETAIL DB 214

- 43W CABINET-LAVATORY
- 43V CABINET-CHEST OF DRAWERS
- 214 DISHWASHER DRAWER STYLE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		04 S40AD
DO NOT SCALE DRAWING		
TITLE		WIRE INSTL-BODY, 110V
SHEET 4	PART NO	145019

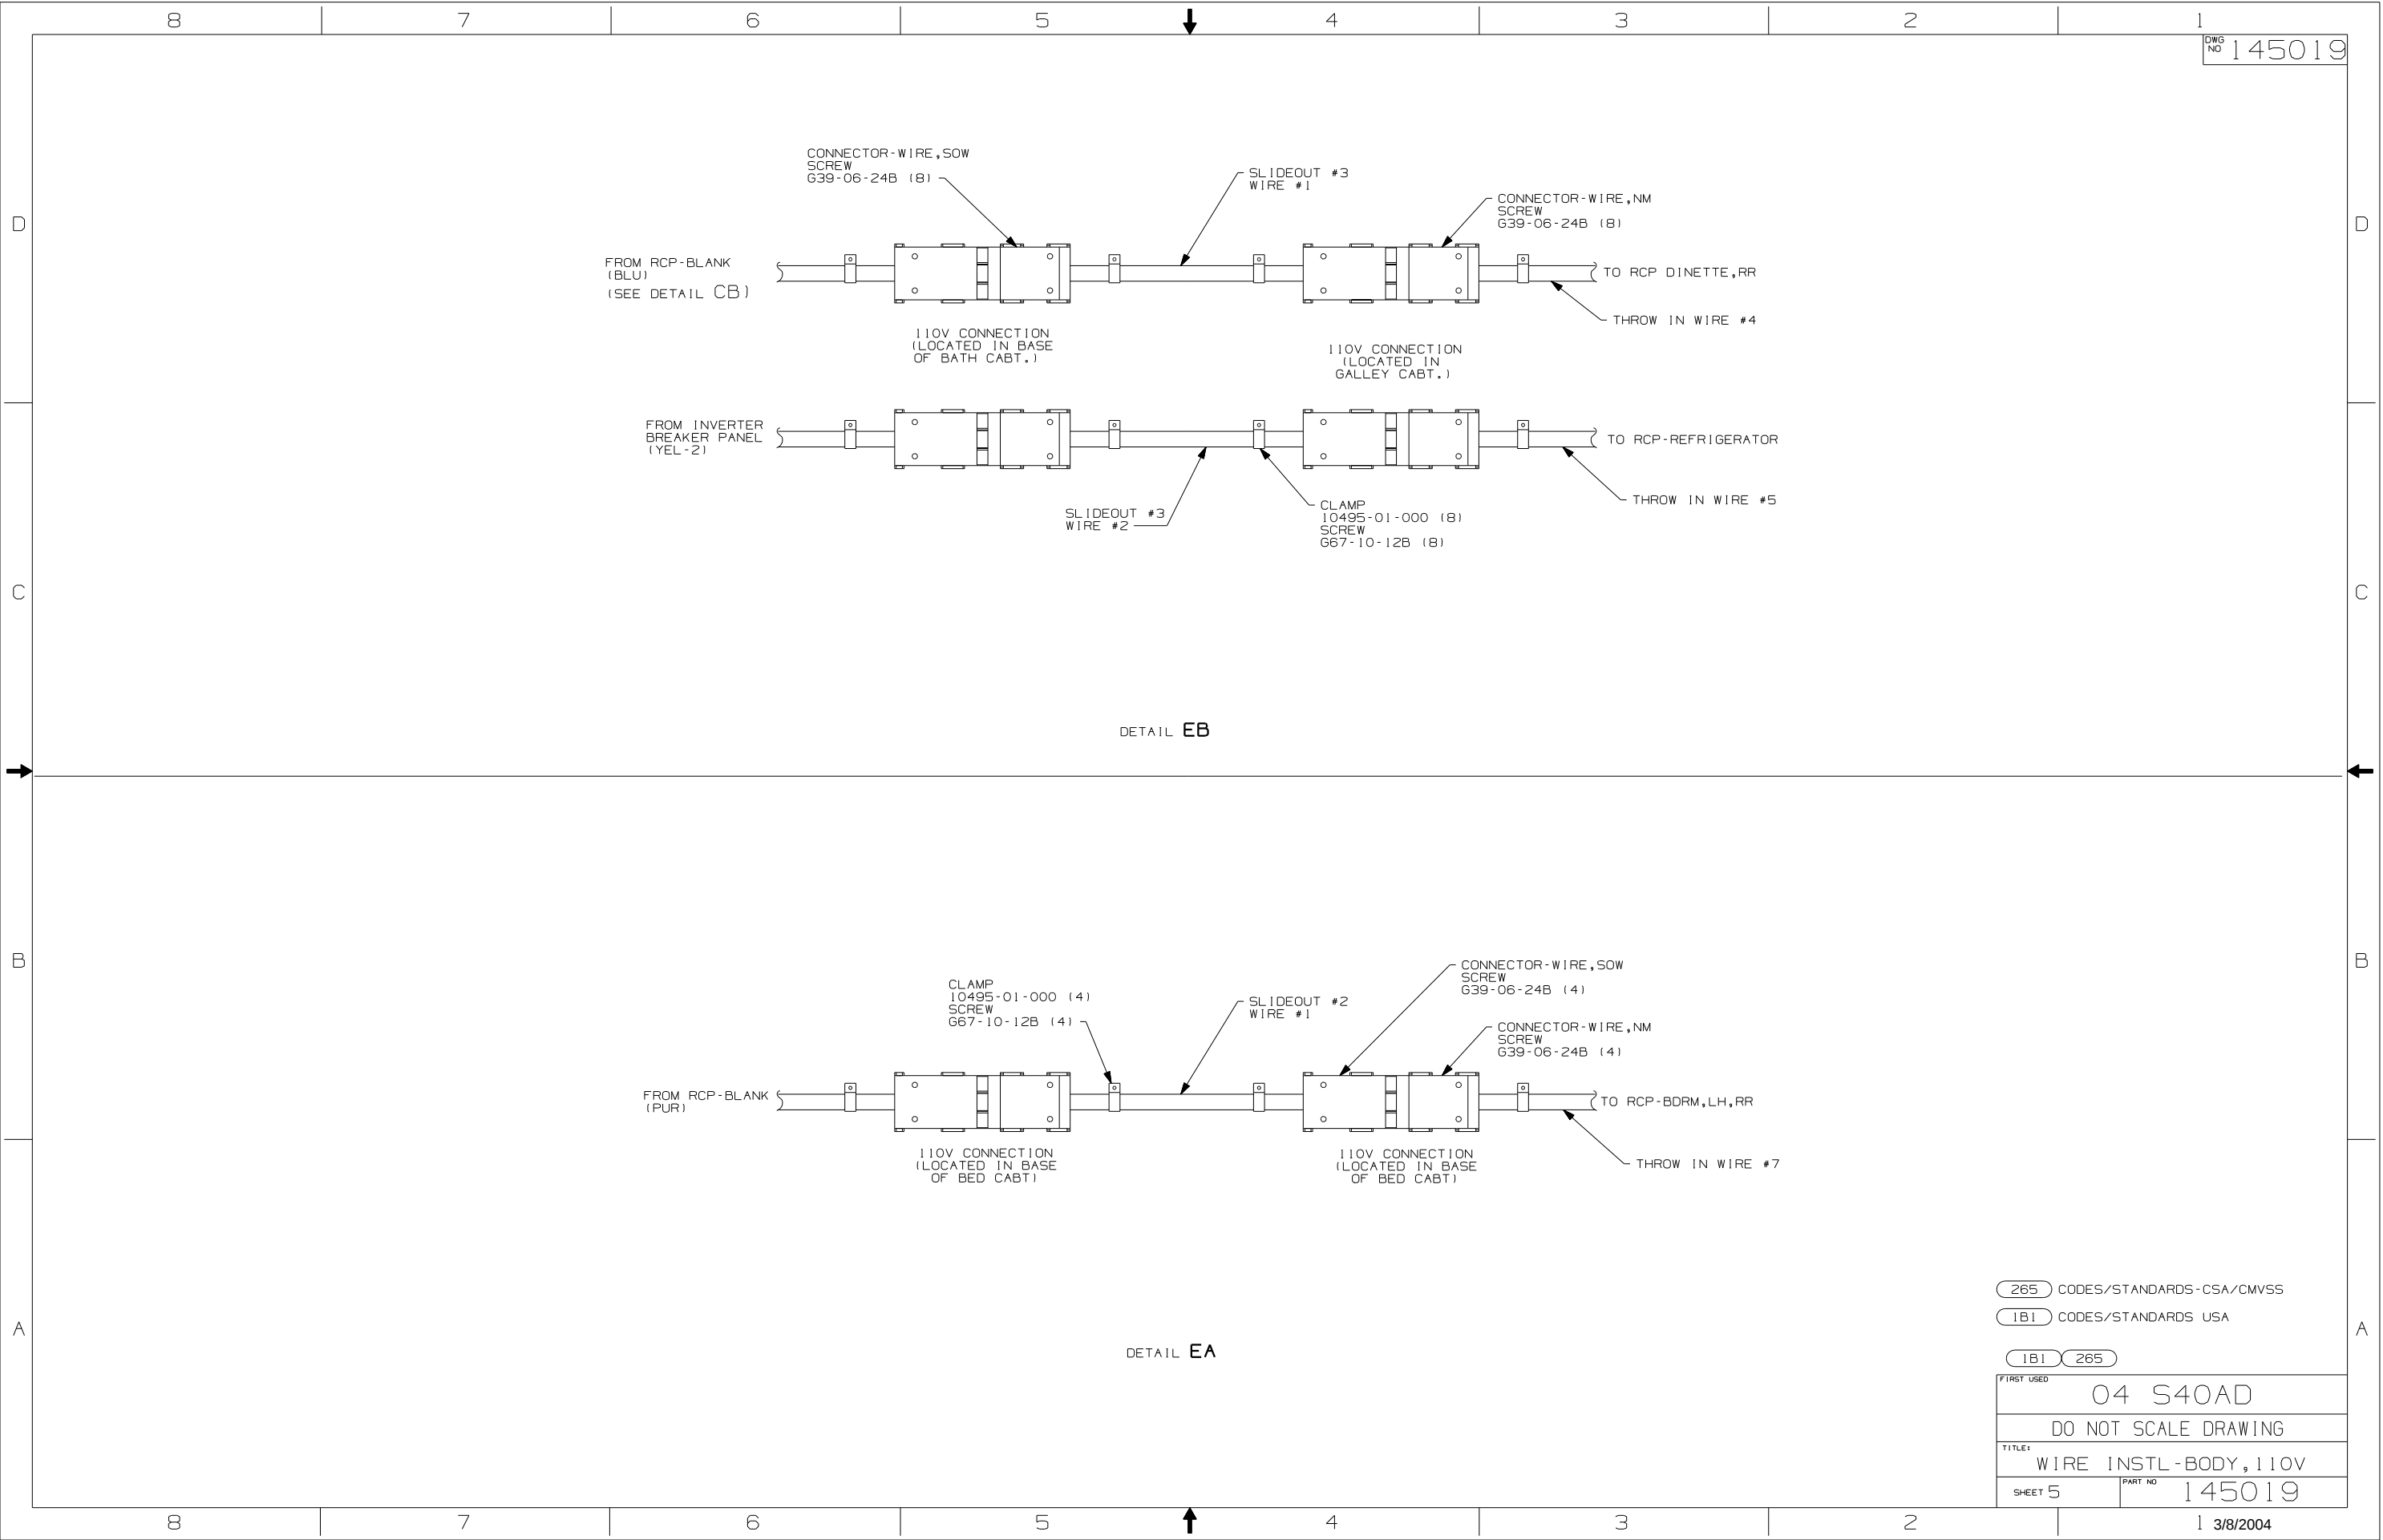

DETAIL EB




DETAIL EA

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		04 S40AD	
DO NOT SCALE DRAWING			
TITLE: WIRE INSTL - BODY, 110V			
SHEET 5		PART NO 145019	

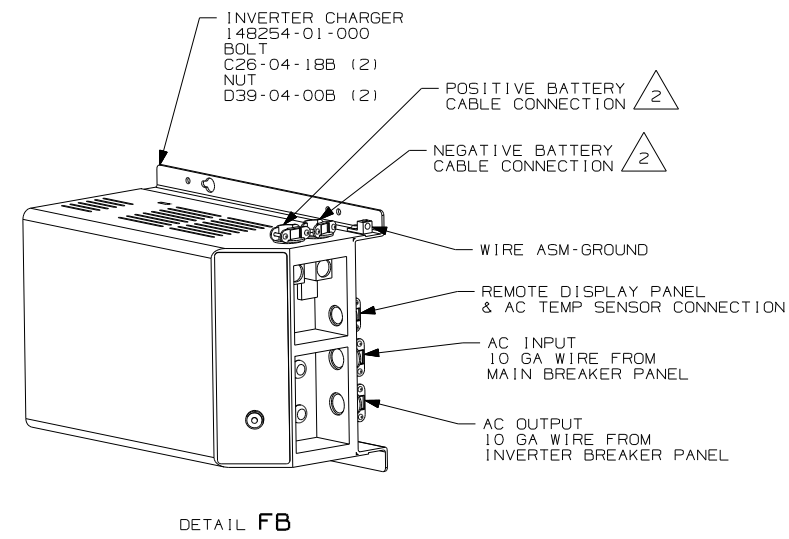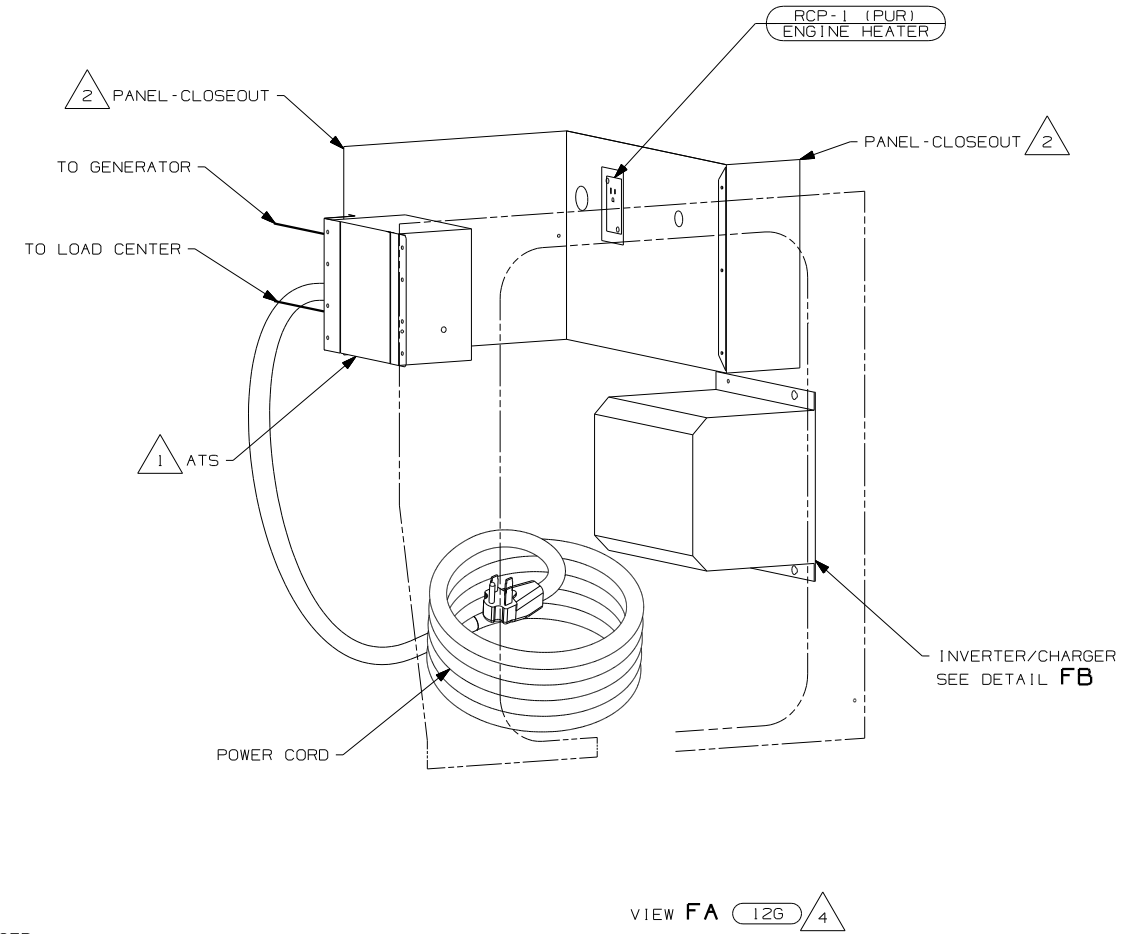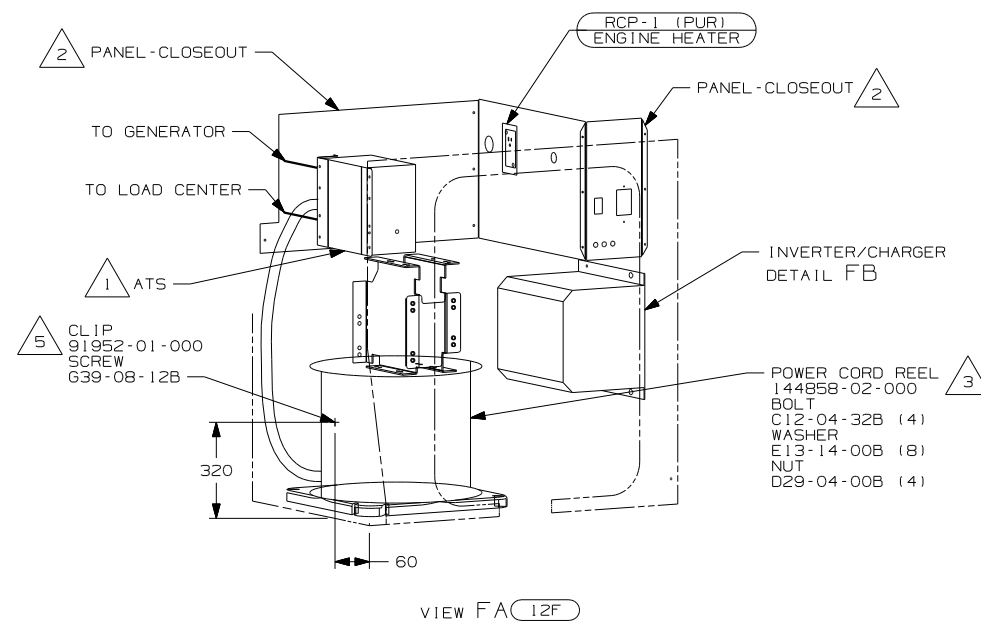

- NOTES:
- 5 FASTEN CLIP TO INSIDE LEFT COMPARTMENT WALL.
 - 4 PLUG POWER CORD REEL MOUNTING HOLES WITH PLUG-PLASTIC 81211-01-000 (4).
 - 3 INSERT BOLT FROM BOTTOM OF COMPT.
 - 2 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
 - 1 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

- 12G POWER CORD REEL-WITHOUT
- 12F POWER CORD REEL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED	04 S40AD	
TITLE	DO NOT SCALE DRAWING	
	WIRE INSTL-BODY, 110V	
SHEET 6	PART NO	145019