



DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.




CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

DRAWING NO.	FEATURE
150253-01	-----
150253-11	(1B1) (12D)
150253-15	(265) (12D)

RELEASE	REV DATE	DWG NO
A		150253
REV ZONE	REVISION RECORD	DATE DFR-ORIG

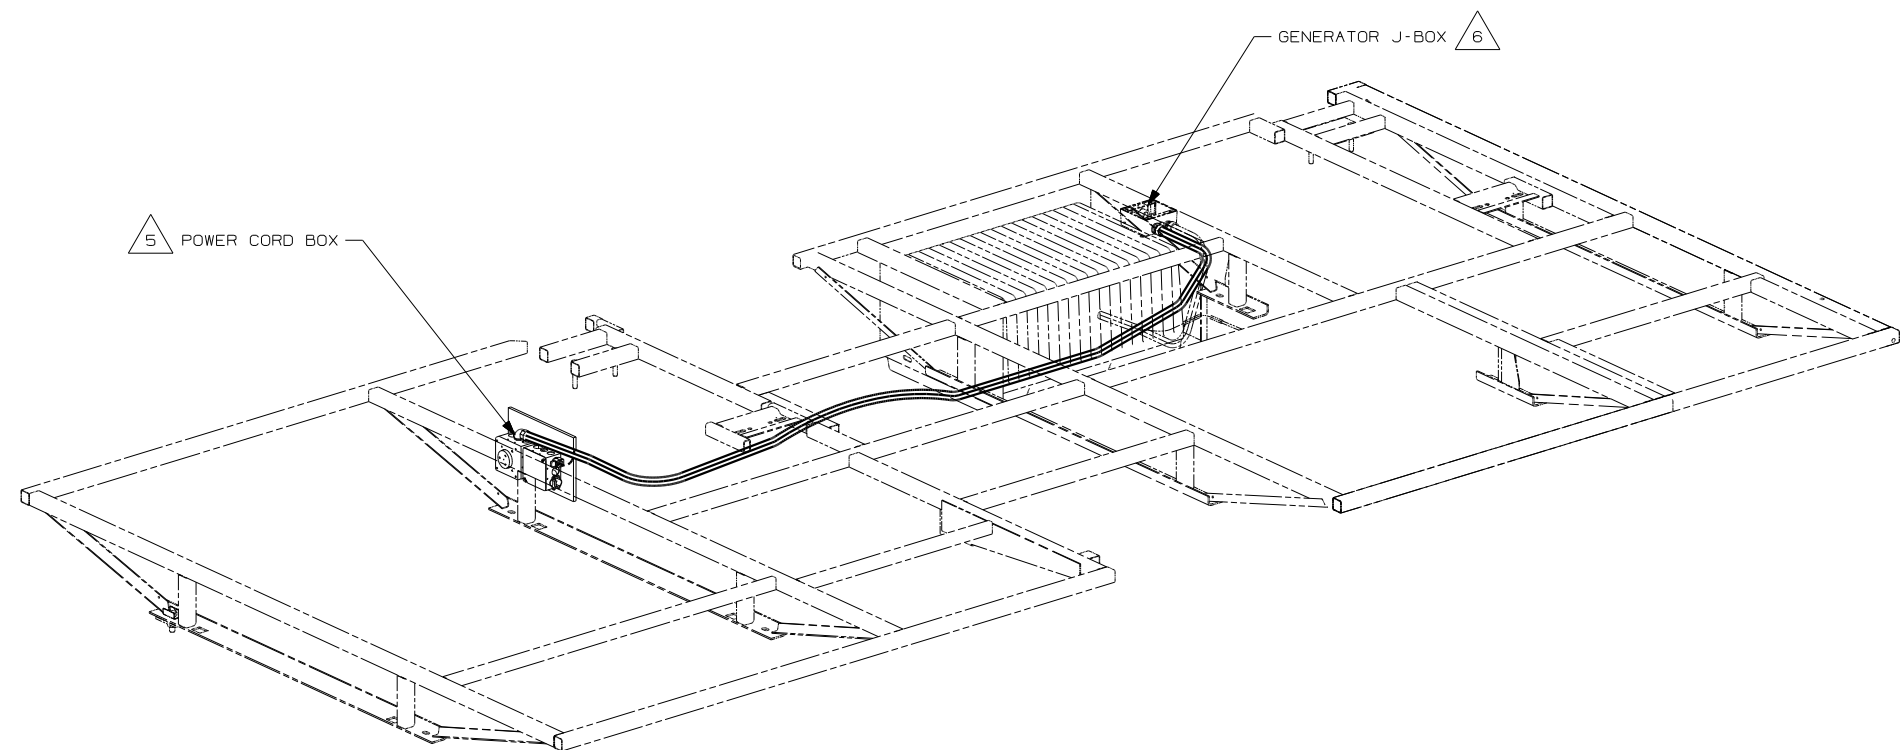

- (40N) GEN-4.0KW-ONANGAS-MICROOUIET
 - (265) CODES/STANDARDS-CSA/CMVSS
 - (12D) ELECTRICAL SYSTEM 30 AMP
 - (1B1) CODES/STANDARDS USA
- (1B1) (12D) (265)

WINNEBAGO COPYRIGHT 2004 WINNEBAGO INDUSTRIES, INC.

DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	05 324F

UNSPECIFIED TOLERANCES ARE:	MATERIAL:
WHOLE DIM (X) :	X
ONE-PLACE (X.X) :	X
TWO-PLACE (X.XX) :	X
ANGLE :	X
THIRD ANGLE PROJECTION	X

DO NOT SCALE DRAWING

TITLE: WRING INSTL.-BODY,110V

SHEET 1 OF 3 PART NO 150253

REF: 145473-C | 1/17/2005

- 6 SEE GENERATOR INSTALLATION FOR ADDITIONAL INFORMATION.
- 5 FOR MORE INFORMATION SEE LOAD CENTER/ATS ASM.
4. FOR MORE INFORMATION SEE WIRING DIAGRAM-BODY,110V.
3. ALL GROUND WIRE TO BE COVERED WITH TUBING 8041-02-000.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

D
C
B
A

D
C
B
A

8 7 6 5 4 3 2

8 7 6 5 4 3 2

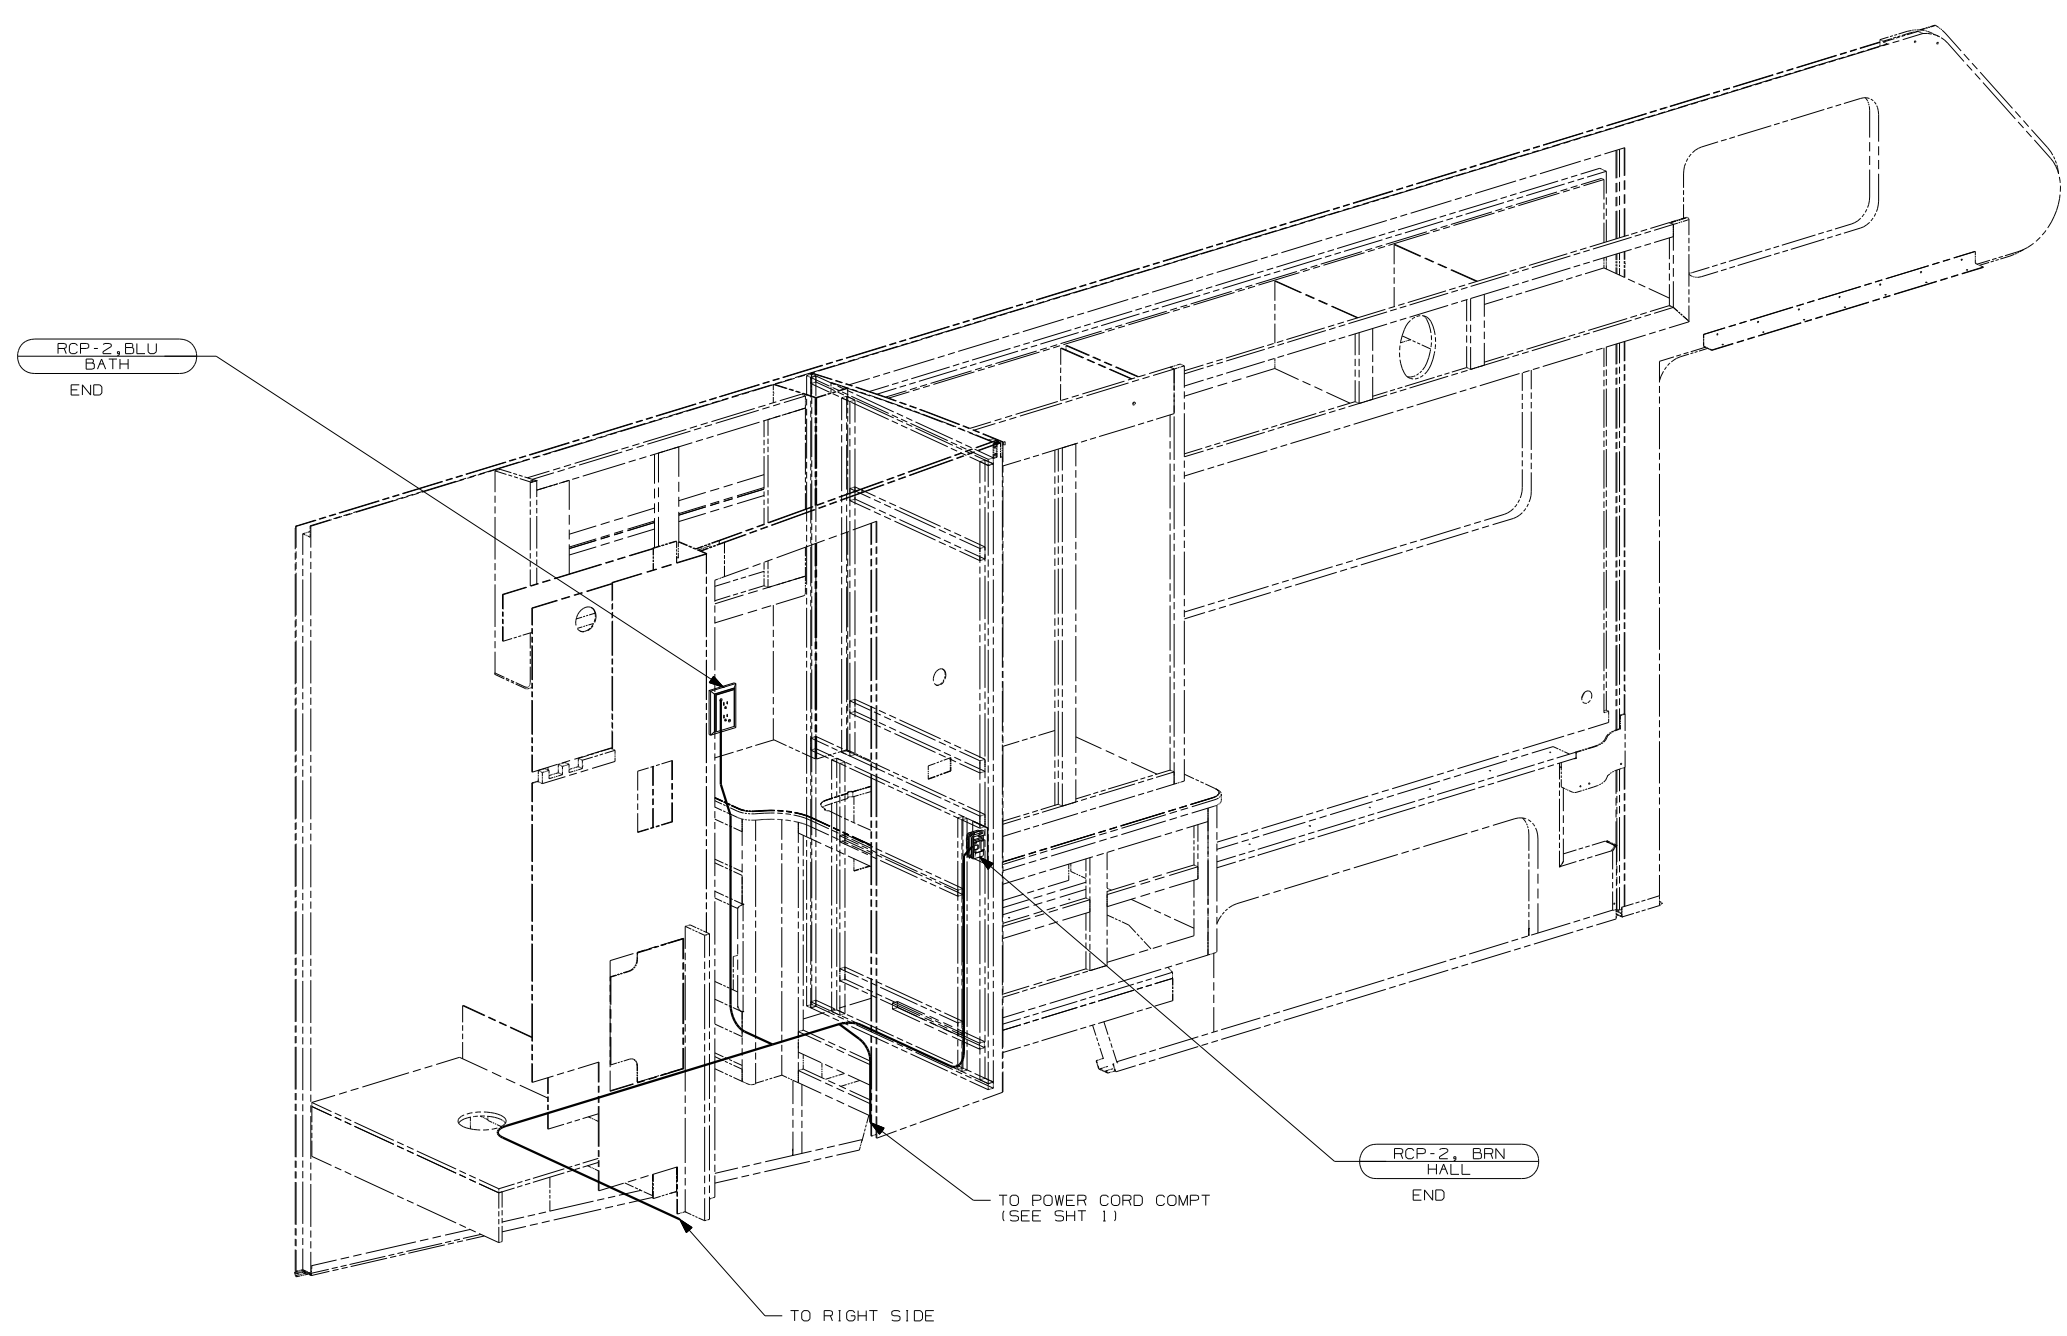

- NOTES:
1. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.
 2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
 3. ALL GROUND WIRE TO BE COVERED WITH TUBING 8041-02-000.

265 CODES/STANDARDS-CSA/CMVSS
 12D ELECTRICAL SYSTEM 30 AMP
 1B1 CODES/STANDARDS USA


1B1 12D 265

FIRST USED	
05 324F	
DO NOT SCALE DRAWING	
TITLE:	
WRING INSTL.-BODY, 110V	
SHEET 2	PART NO
	150253

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



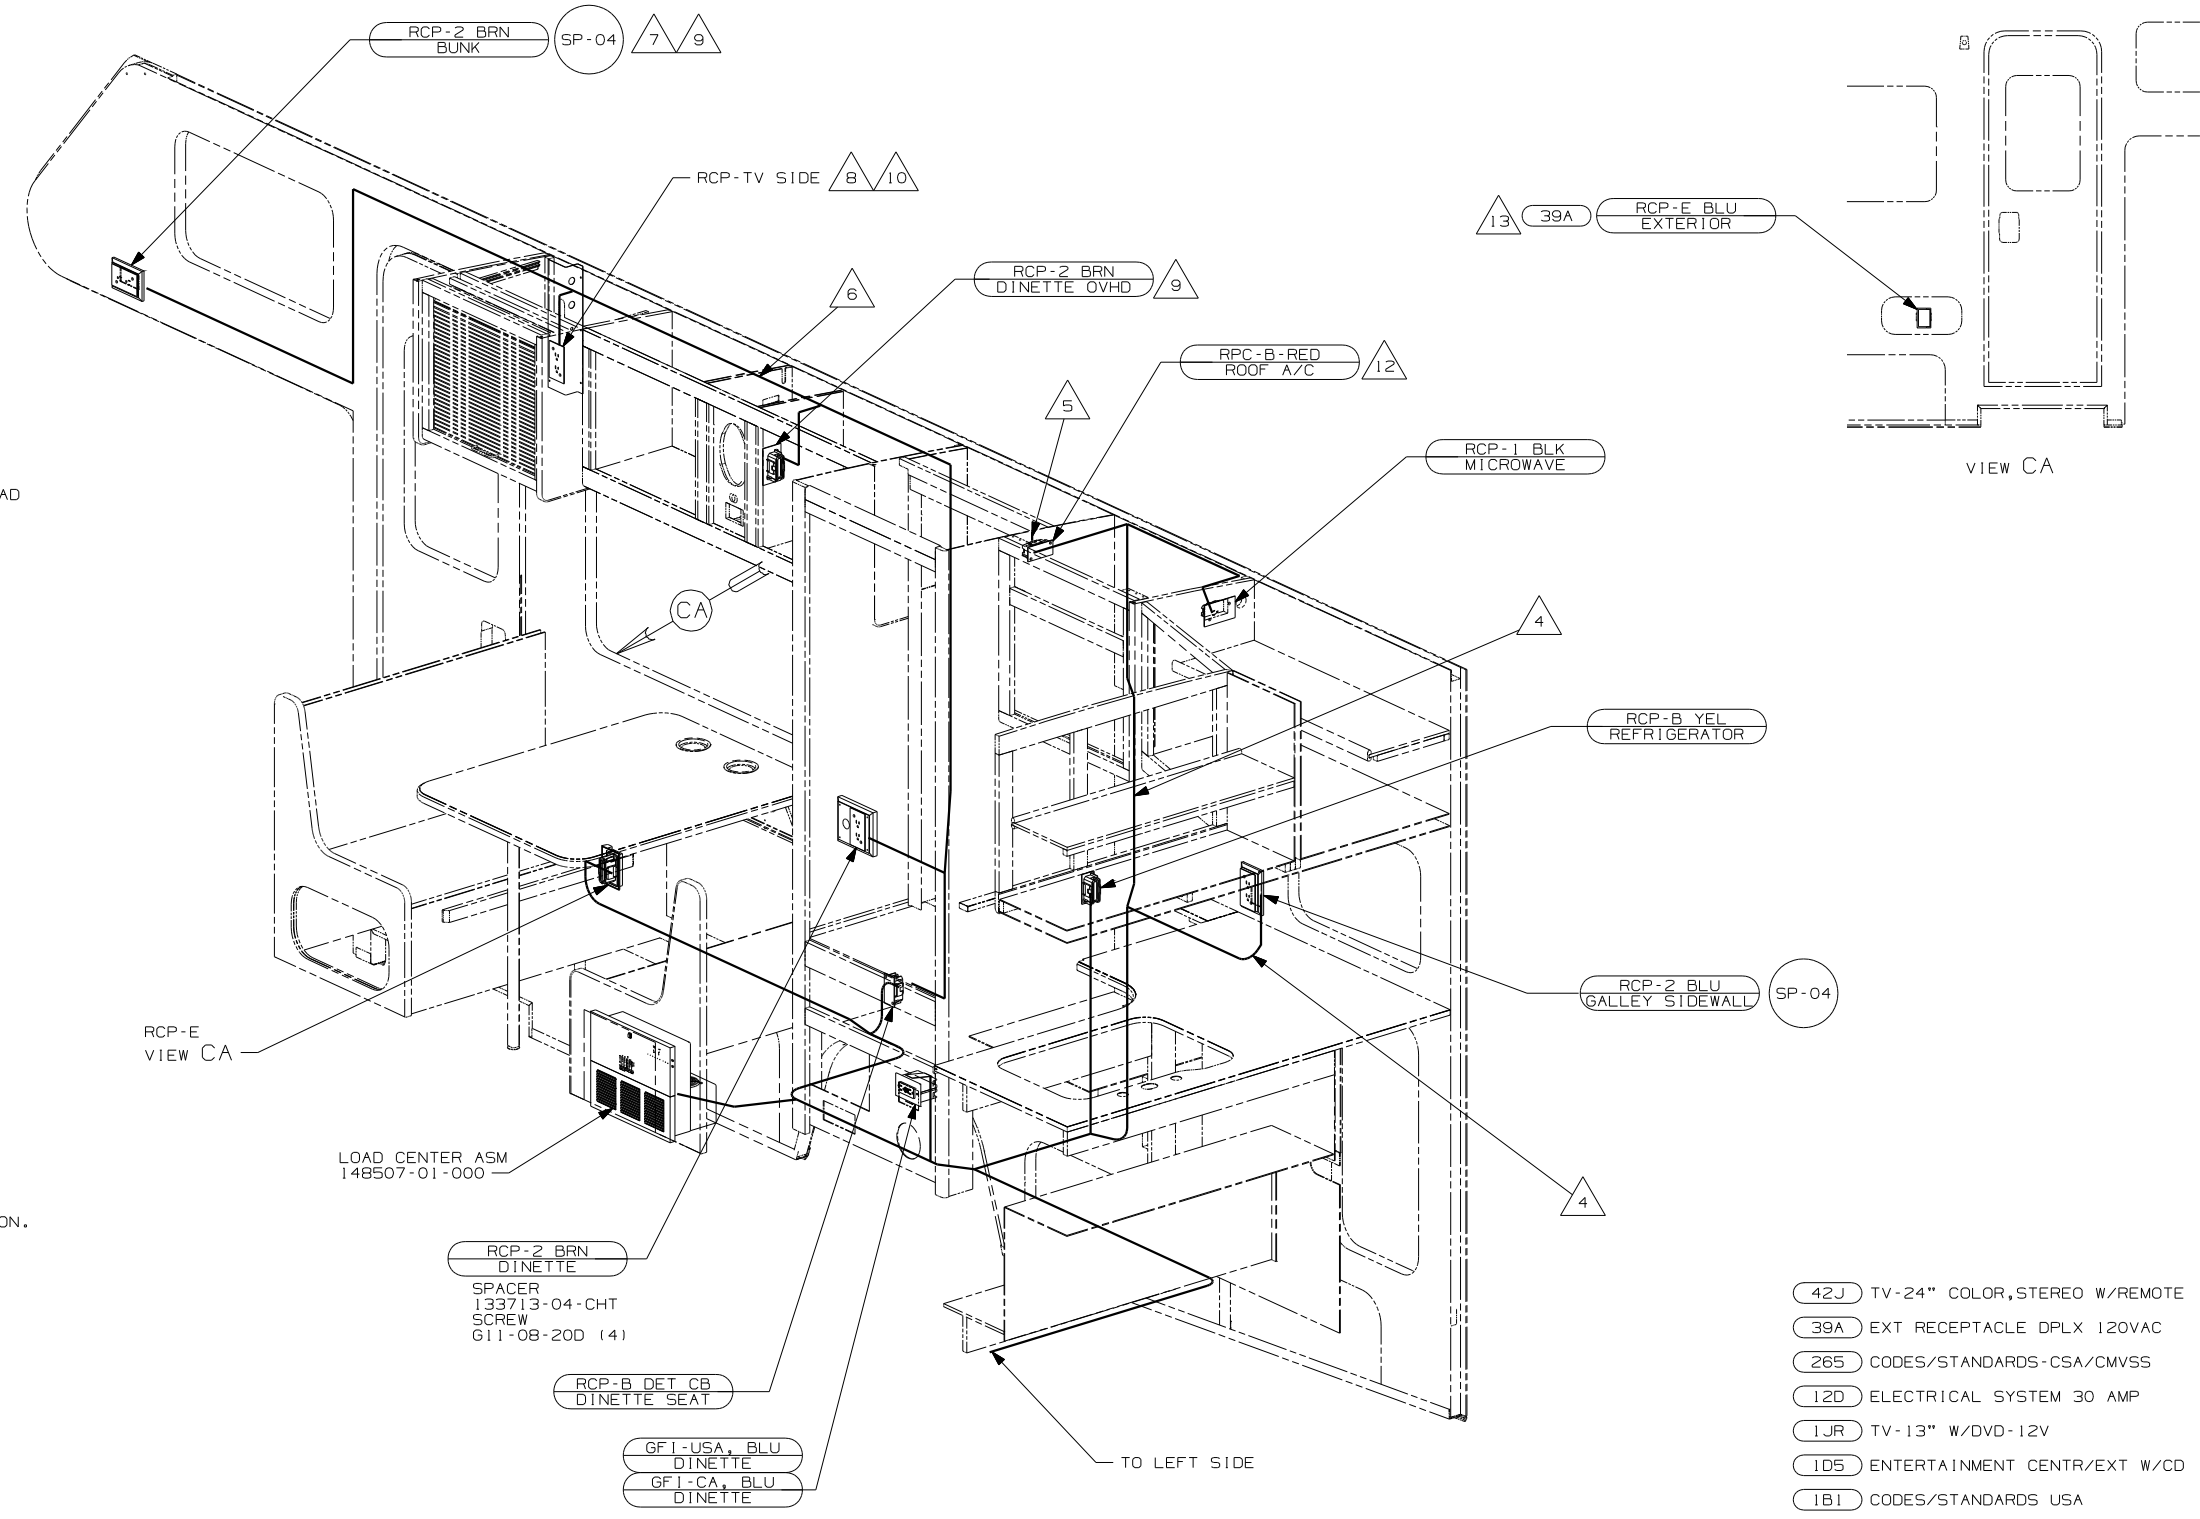

- 13 NOT USED WITH 105
- 12 SEE WIRING INSTL-ROOF,A/C.
- 11 LOCATE REFRIGERATOR RCP ON TIEDOWN BRACKET.
- 10 SEE WIRING INSTL-TV,SIDE FOR ADDITIONAL INFORMATION.
- 9 NOT USED WITH 42J
- 8 NOT USED WITH 1JR OR 42J
- 7 WITH FRONT ENTERTAINMENT CENTER,SEE WIRING INSTL-TV/VCR FRONT FOR ADDITIONAL INFORMATION.
- 6 WIRE IN SIDEWALL.
- 5 WIRE IN ROOF.
- 4 ROUTE WIRE THRU SIDEWALL.

- NOTES:
3. ALL GROUND WIRE TO BE COVERED WITH TUBING 8041-02-000.
 2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
 1. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

- 42J TV-24" COLOR,STEREO W/REMOTE
- 39A EXT RECEPTACLE DPLX 120VAC
- 265 CODES/STANDARDS-CSA/CMVSS
- 12D ELECTRICAL SYSTEM 30 AMP
- 1JR TV-13" W/DVD-12V
- 105 ENTERTAINMENT CENTR/EXT W/CD
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED	05 324F
DO NOT SCALE DRAWING	
TITLE:	WRING INSTL.-BODY,110V
SHEET 3	PART NO 150253