




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

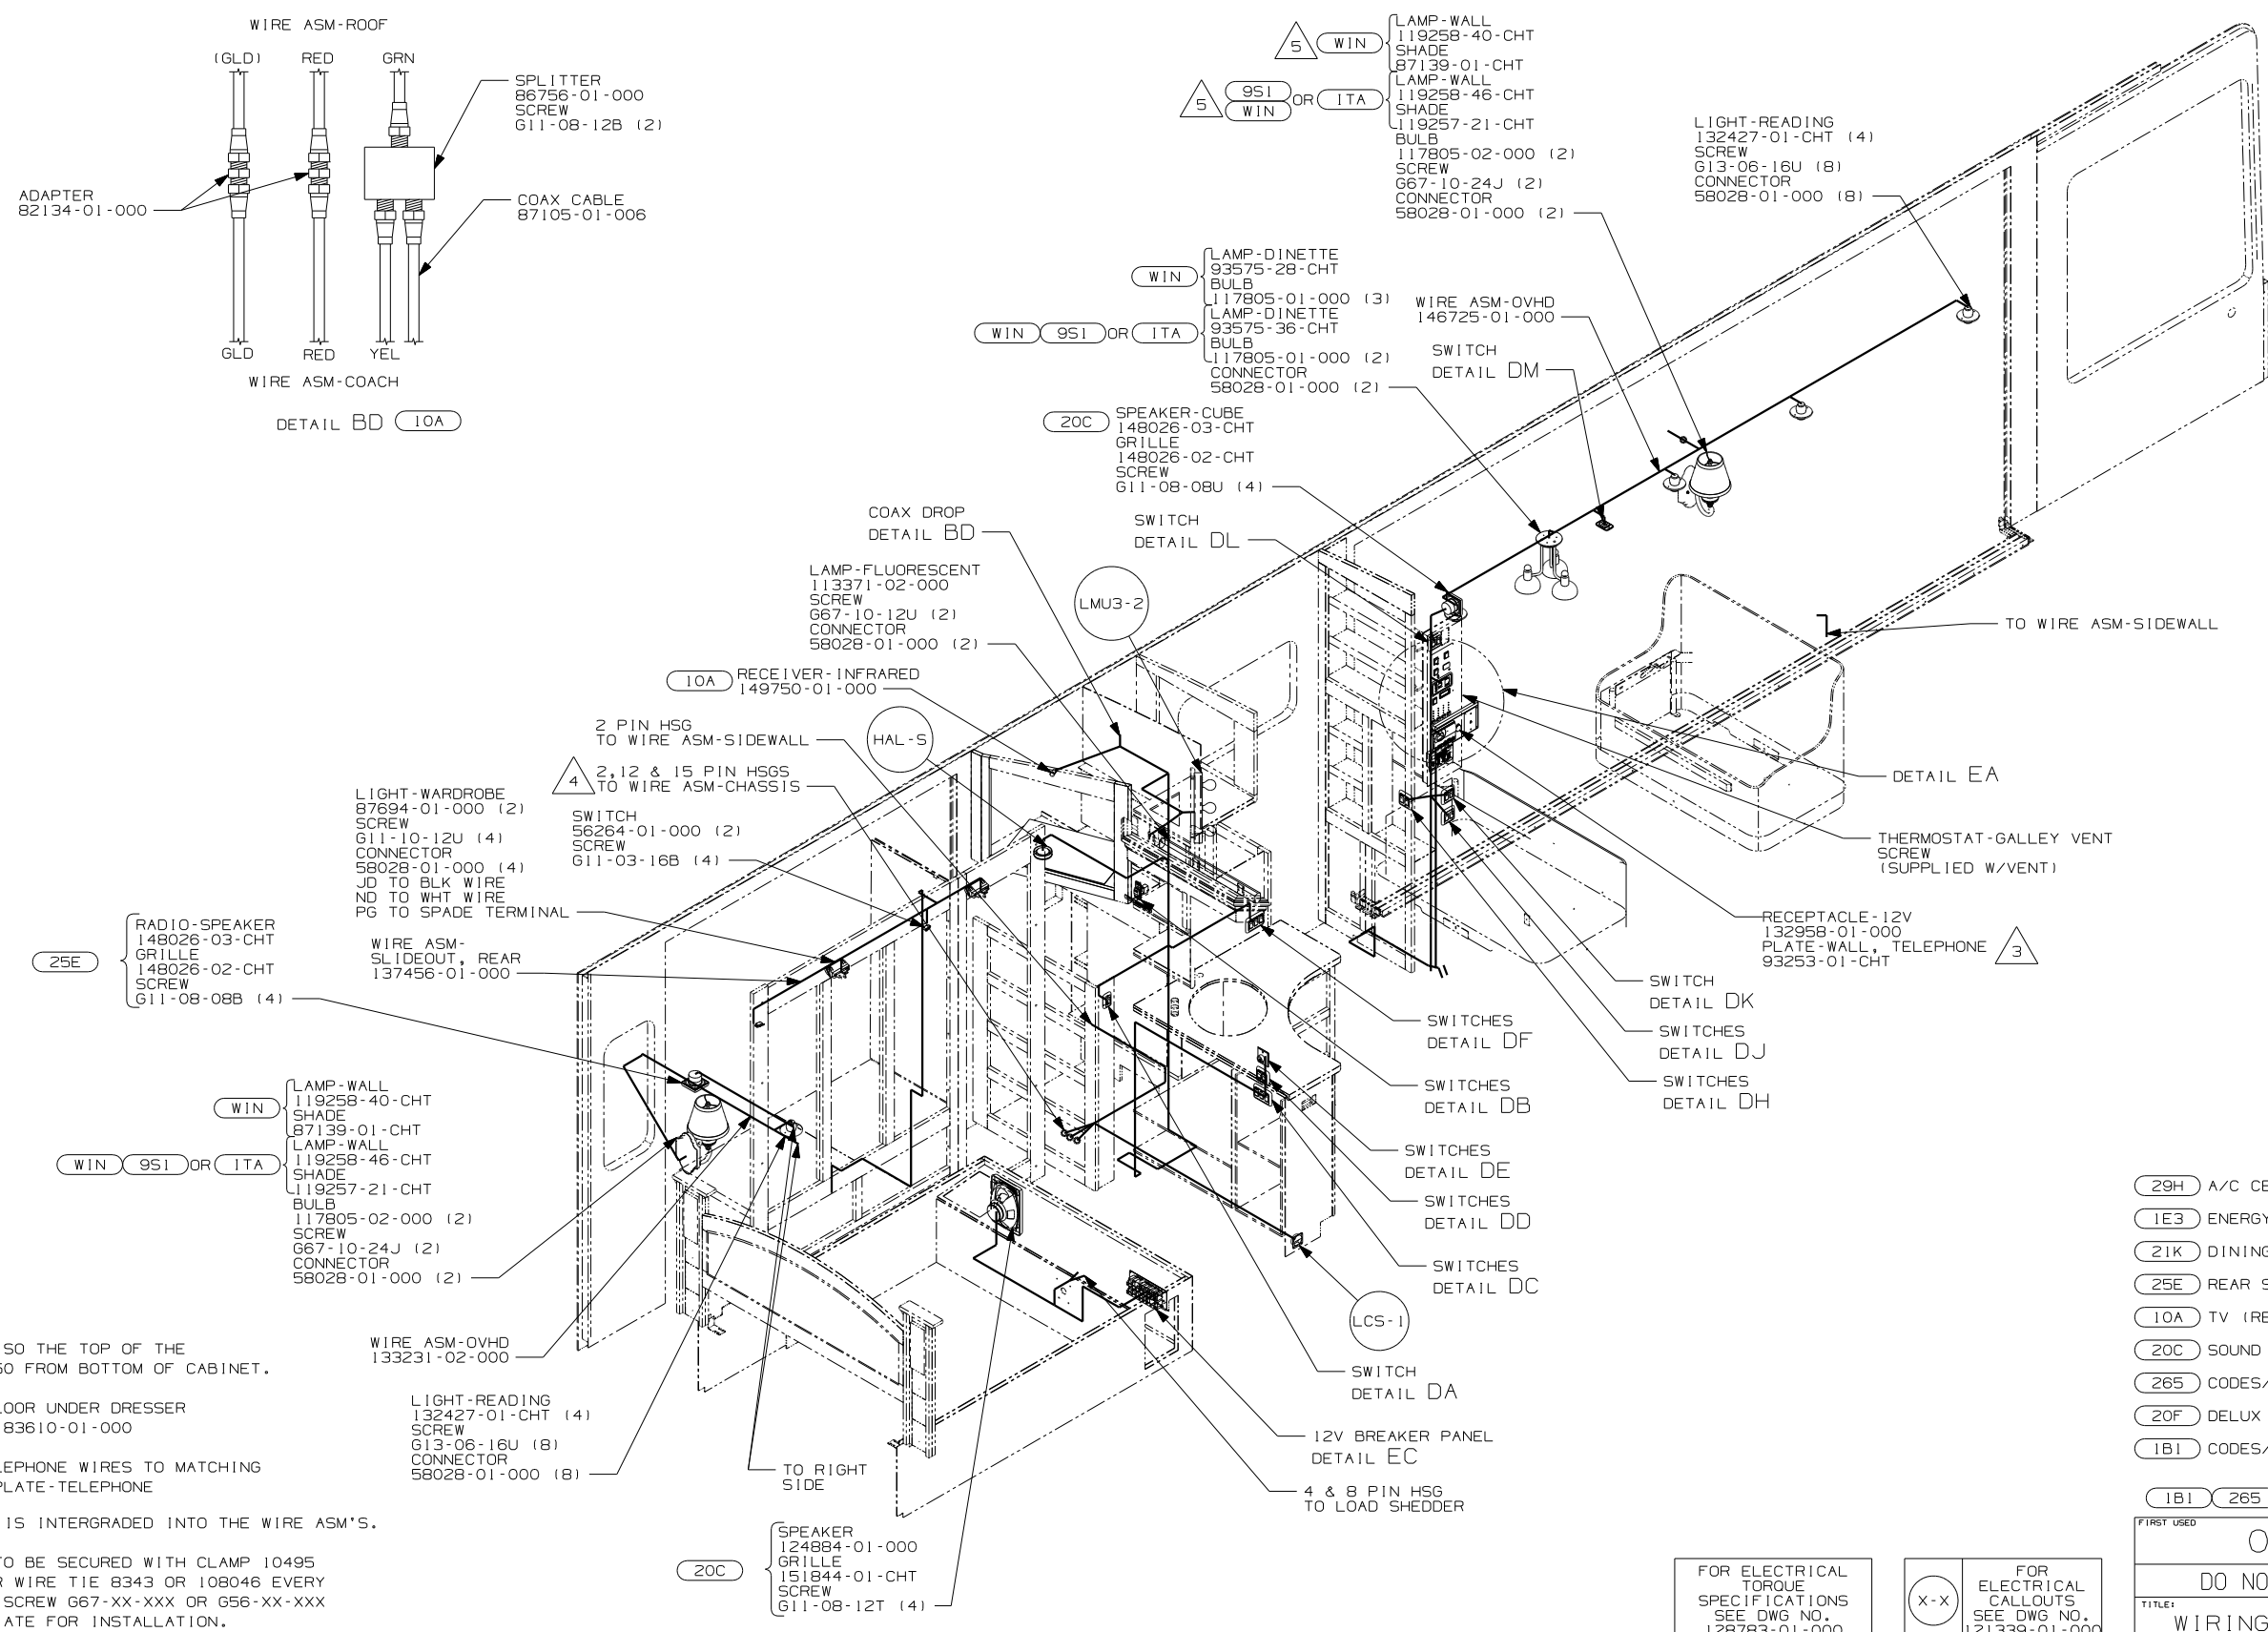

- 5 MOUNT LAMP SO THE TOP OF THE SHADE IS 150 FROM BOTTOM OF CABINET.
- 4 CLAMP TO FLOOR UNDER DRESSER WITH CLAMP 83610-01-000
- 3 CONNECT TELEPHONE WIRES TO MATCHING COLORS ON PLATE-TELEPHONE

- 2. COAX CABLE IS INTERGRADED INTO THE WIRE ASM'S.
- 1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.



NOTES:

- 29H A/C CENTRAL HEAT PUMP
- IE3 ENERGY MANAGEMENT SYSTEM
- 21K DINING/COMPUTER TABLE/CHAIRS
- 25E REAR STEREO SYSTEM W/CD
- 10A TV (REAR) -20"COLOR, STEREO
- 20C SOUND SYS. DLX. W/ 0-SURROUND
- 265 CODES/STANDARDS-CSA/CMVSS
- 20F DELUX SOUND SYSTEM-WITHOUT
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000










FIRST USED	
05 S36GD	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY, 12V	
SHEET 2	PART NO 150765

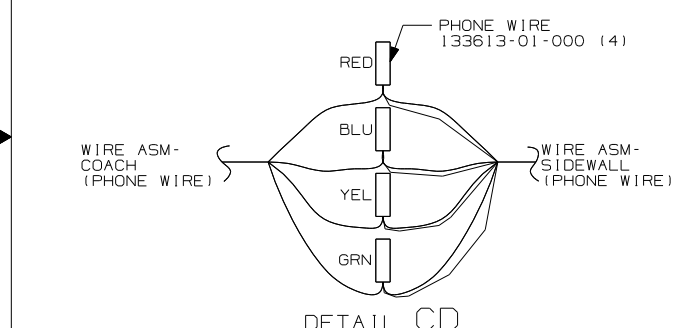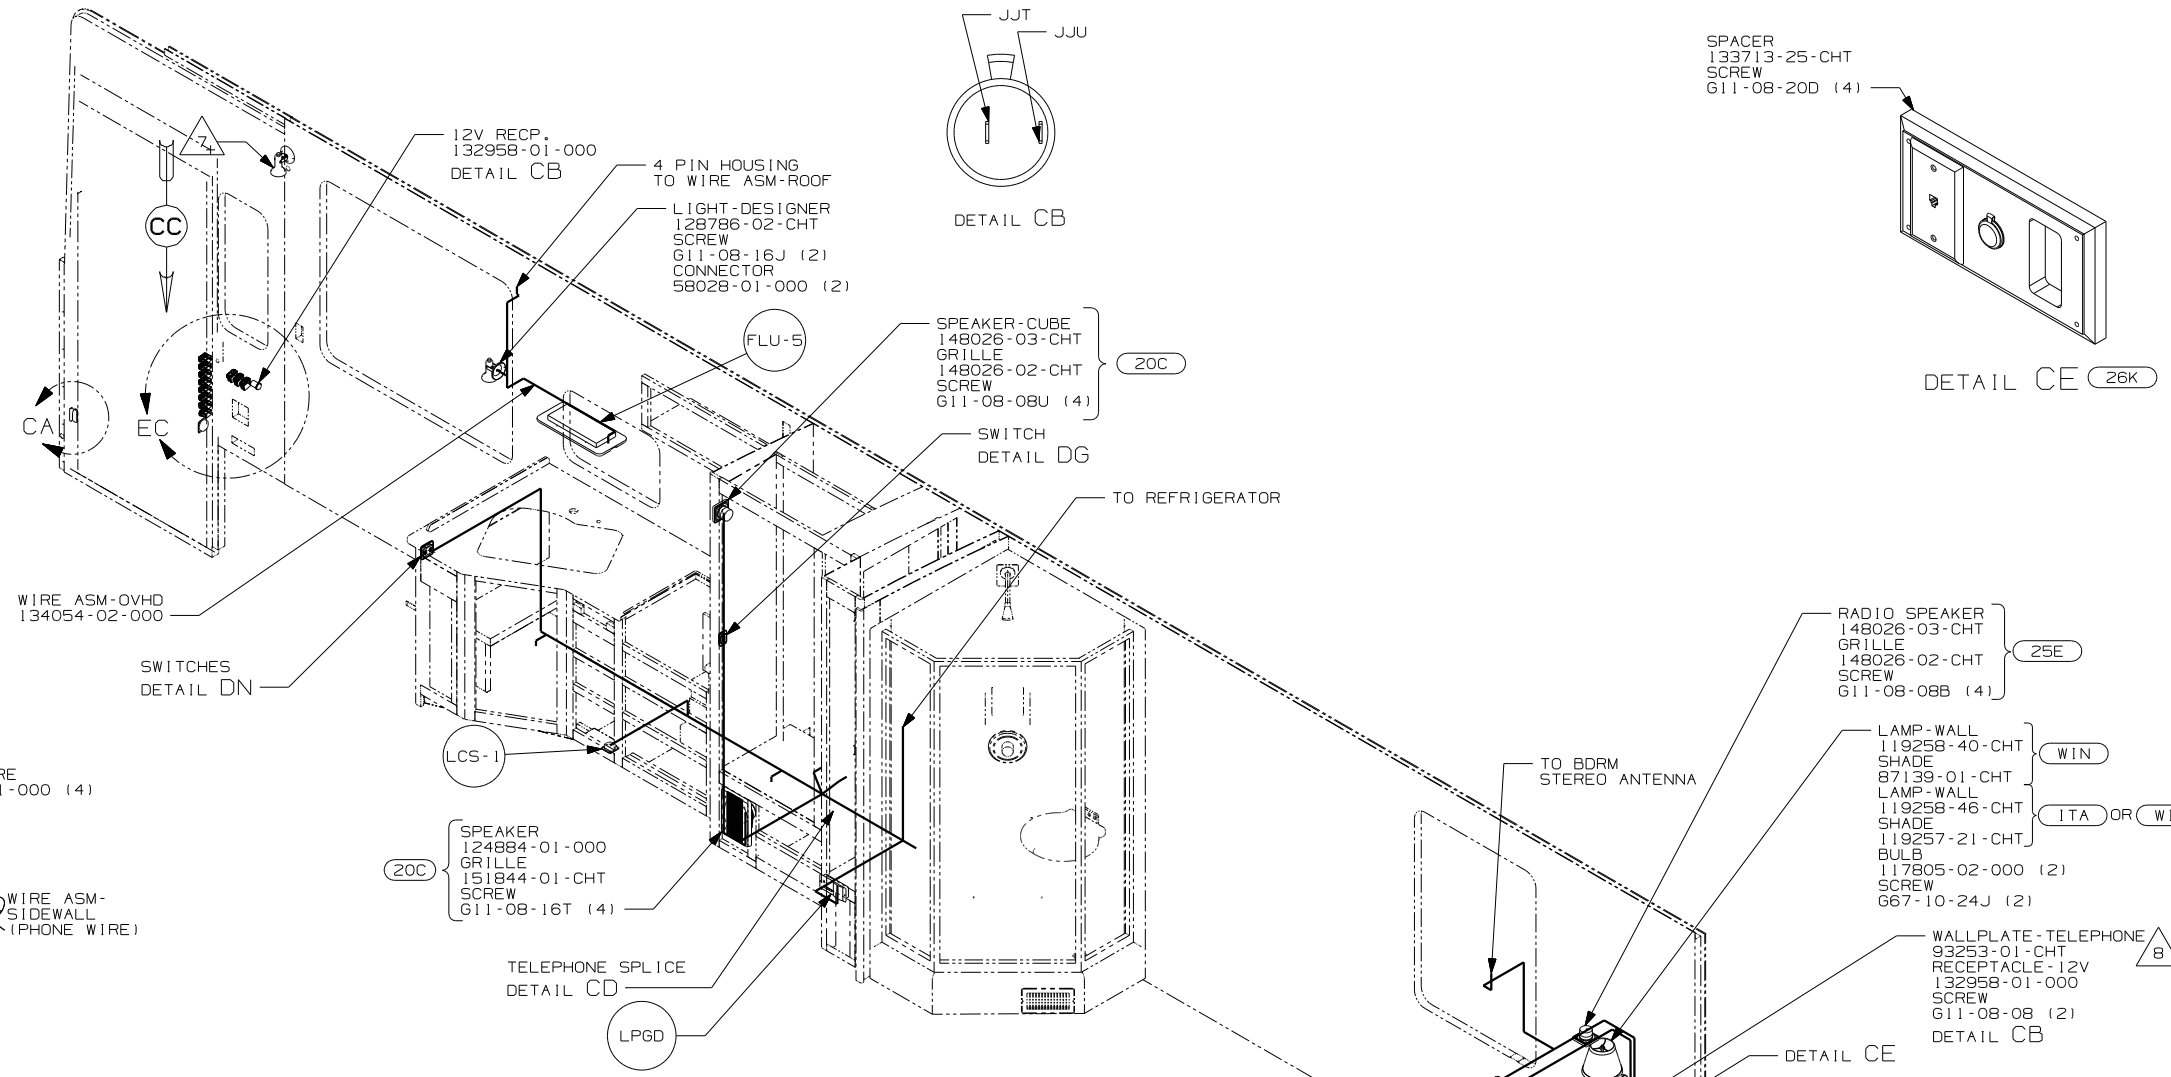

- 12 MOUNT CROSSOVER COIL TO BACKWALL.
- 11 MOUNT CROSSOVER BOX TO SIDEWALL.
- 10 WITHOUT (64J) TIE BACK TO MAIN WIRE ASM.
- 9 ROUTE WIRE UNDER FLOOR SHOWN.
- 8 CONNECT TELEPHONE WIRES TO MATCHING COLORS ON PLATE-TELEPHONE.
- 7 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 6 SEE STYLING SHEET FOR ADDITIONAL INFORMATION.
- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 SPEAKER IS MOUNTED TO ROOF.
- 3 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB ADJUST HEIGHT TO MATCH MAGNET.
- 2 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

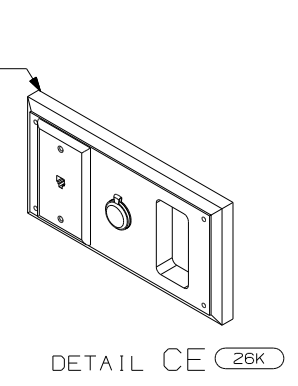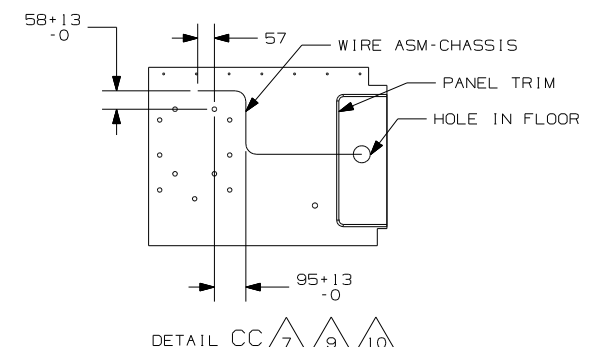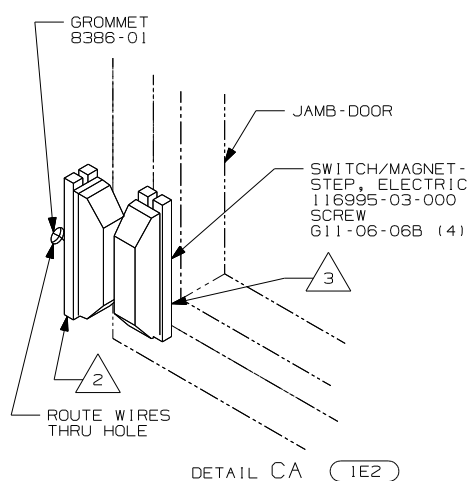


- (ITA) ITASCA ONLY
- (95I) STAINLESS STEEL PACKAGE
- (64J) SEAT PED-6-WAY DR/PASS POWER
- (WIN) WINNEBAGO ONLY
- (20C) SOUND SYS. DLX. W/O-SOUND
- (26K) REAR STEREO SYSTEM WITHOUT
- (25E) REAR STEREO SYSTEM W/CD
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA
- (1E2) ENTRANCE STEP-ELECT.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED	05 S36GD
DO NOT SCALE DRAWING	
TITLE:	WIRING INSTL-BODY, 12V
SHEET 3	PART NO 150765




SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

DETAIL DA




SWITCH-ROCKER
135740-01-CHT (2)
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-14-CHT
SCREW
G11-08-08U (4)

DETAIL DE



SWITCH-ROCKER
135740-01-CHT (2)
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-18-CHT
SCREW
G11-08-08U (4)


DETAIL DK



SLIDEOUT CONTROL SWITCH
EXTEND
RETRACT
PLATE-SWITCH
144363-09-CHT
SWITCH
108357-06-000
ACTUATOR
108356-02-CHT
NUT
D65-08-00B (2)
LABEL
116220-01-000


LABEL-WARNING
116549-01-000

WARNING UNDERSTAND OPERATOR'S MANUAL BEFORE USING
KEEP PEOPLE AND OBSTRUCTIONS CLEAR OF
SLIDEOUT ROOM WHEN OPERATING TO AVOID
INJURY AND/OR PROPERTY DAMAGE

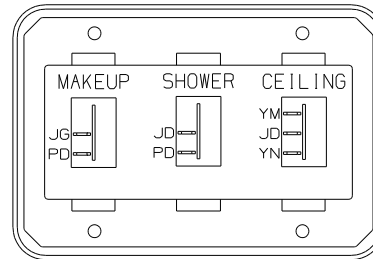

SWITCH-ROCKER
135740-01-CHT (2)
135740-02-CHT
SWITCH-BASE
135741-03-CHT
SWITCH-BEZEL
135742-28-CHT
SCREW
G11-08-08U (4)


DETAIL DF




SWITCH-ROCKER
135740-01-CHT
135740-06-CHT
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-34-CHT
SCREW
G11-08-08U (4)

DETAIL DL

DETAIL DB
(FRONT VIEW)




DETAIL DB
(REAR VIEW)




SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-07-CHT
SCREW
G11-08-08U (2)

DETAIL DG



SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)


DETAIL DM

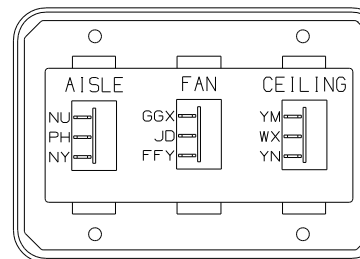

SWITCH-ROCKER
135740-02-CHT (2)
135740-04-CHT
SWITCH-BLANK
138253-01-CHT
SWITCH-BASE
135741-03-CHT
SWITCH-BEZEL
135742-23-CHT
SCREW
G11-08-08U (4)


WIRE ASM-RESISTOR,FAN
140195-01-000

DETAIL DC




SWITCH-ROCKER
135740-01-CHT (2)
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-33-CHT
SCREW
G11-08-08U (4)

DETAIL DH




SWITCH-ROCKER
135740-01-CHT
135740-02-CHT
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-21-CHT
SCREW
G11-08-08U (4)

DETAIL DN



SWITCH
137889-01-000
SCREW
G11-06-10U (2)

DETAIL DD



SWITCH-ROCKER
135740-01-CHT (2)
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-31-CHT
SCREW
G11-08-08U (4)

DETAIL DJ

- (41Y) FAN-CEILING
- (412) DECORATIVE LIGHT-CEILING
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS-USA

(1B1) (265)

(Z) CONNECTS TO WIRE ASM-COACH UNDER BEDROOM DRESSER.

(1) CONNECT TELEPHONE WIRES TO MATCHING COLORS ON PLATE-TELEPHONE.

NOTES:



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

(X-X) FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000




FIRST USED	05 S36GD
TITLE	DO NOT SCALE DRAWING
	WIRING INSTL-BODY, 12V
SHEET 4	PART NO 150765

PLATE
139067-05-CHT
LABEL
92547-13-000
SCREW
611-10-12U (4)

DWG NO 150765

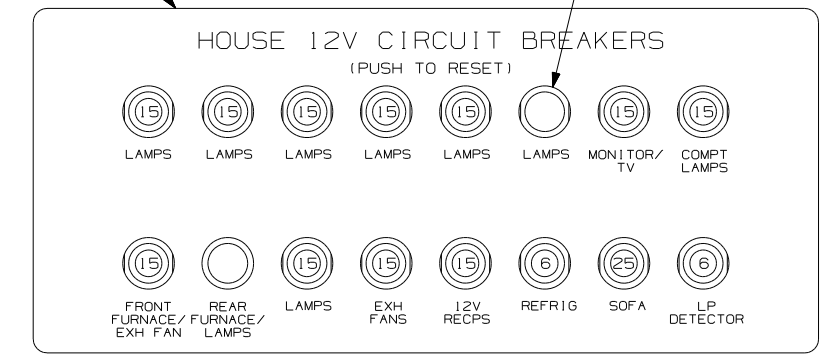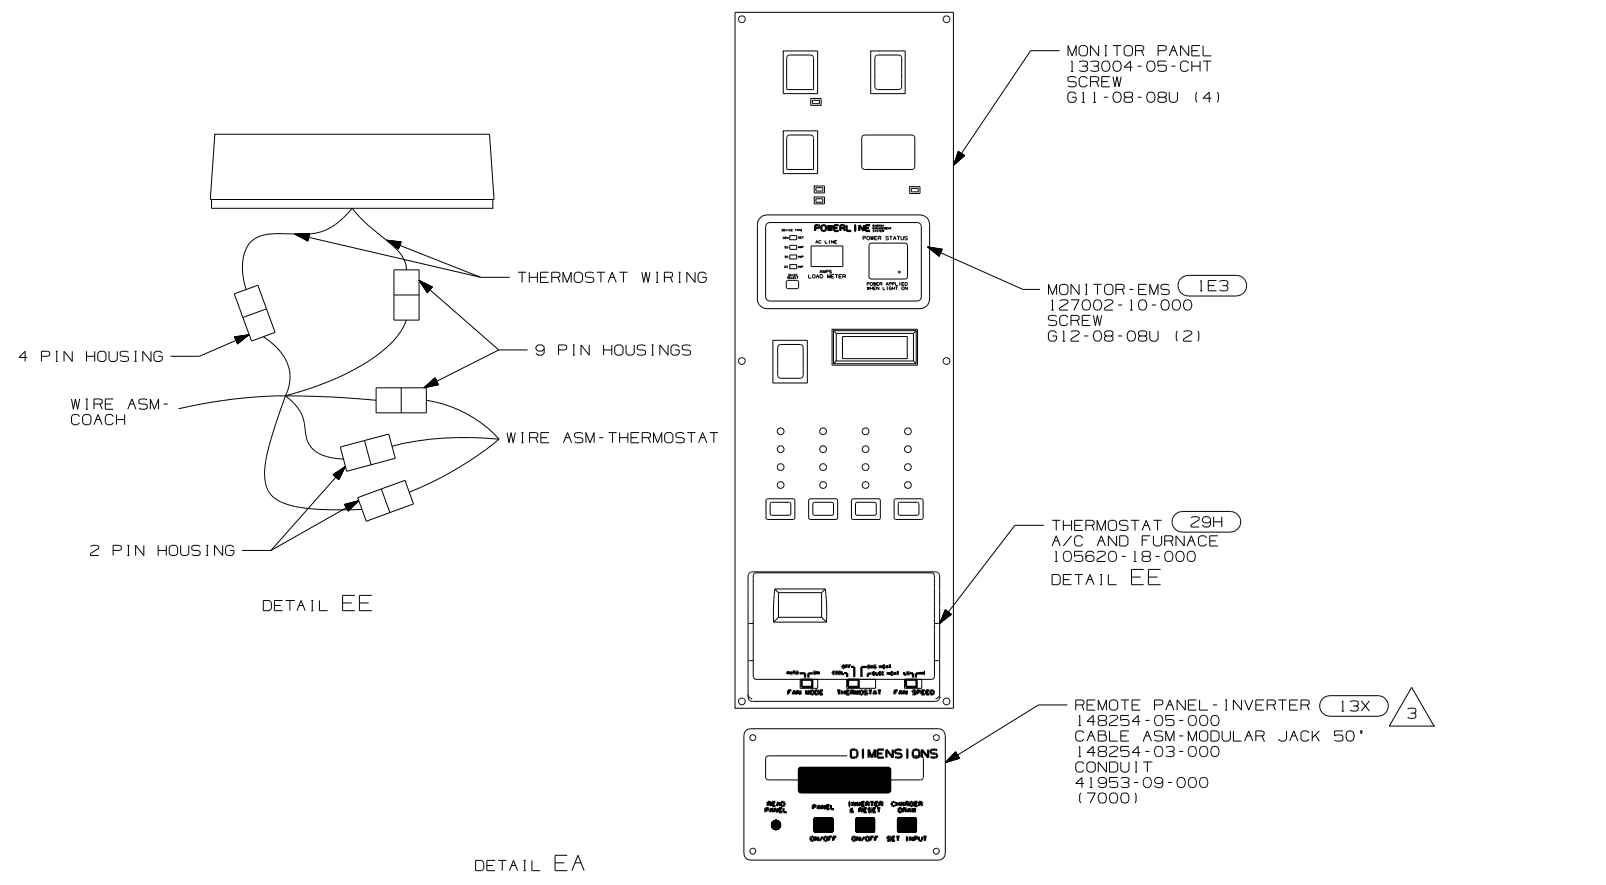

DETAIL EB
(FRONT VIEW)

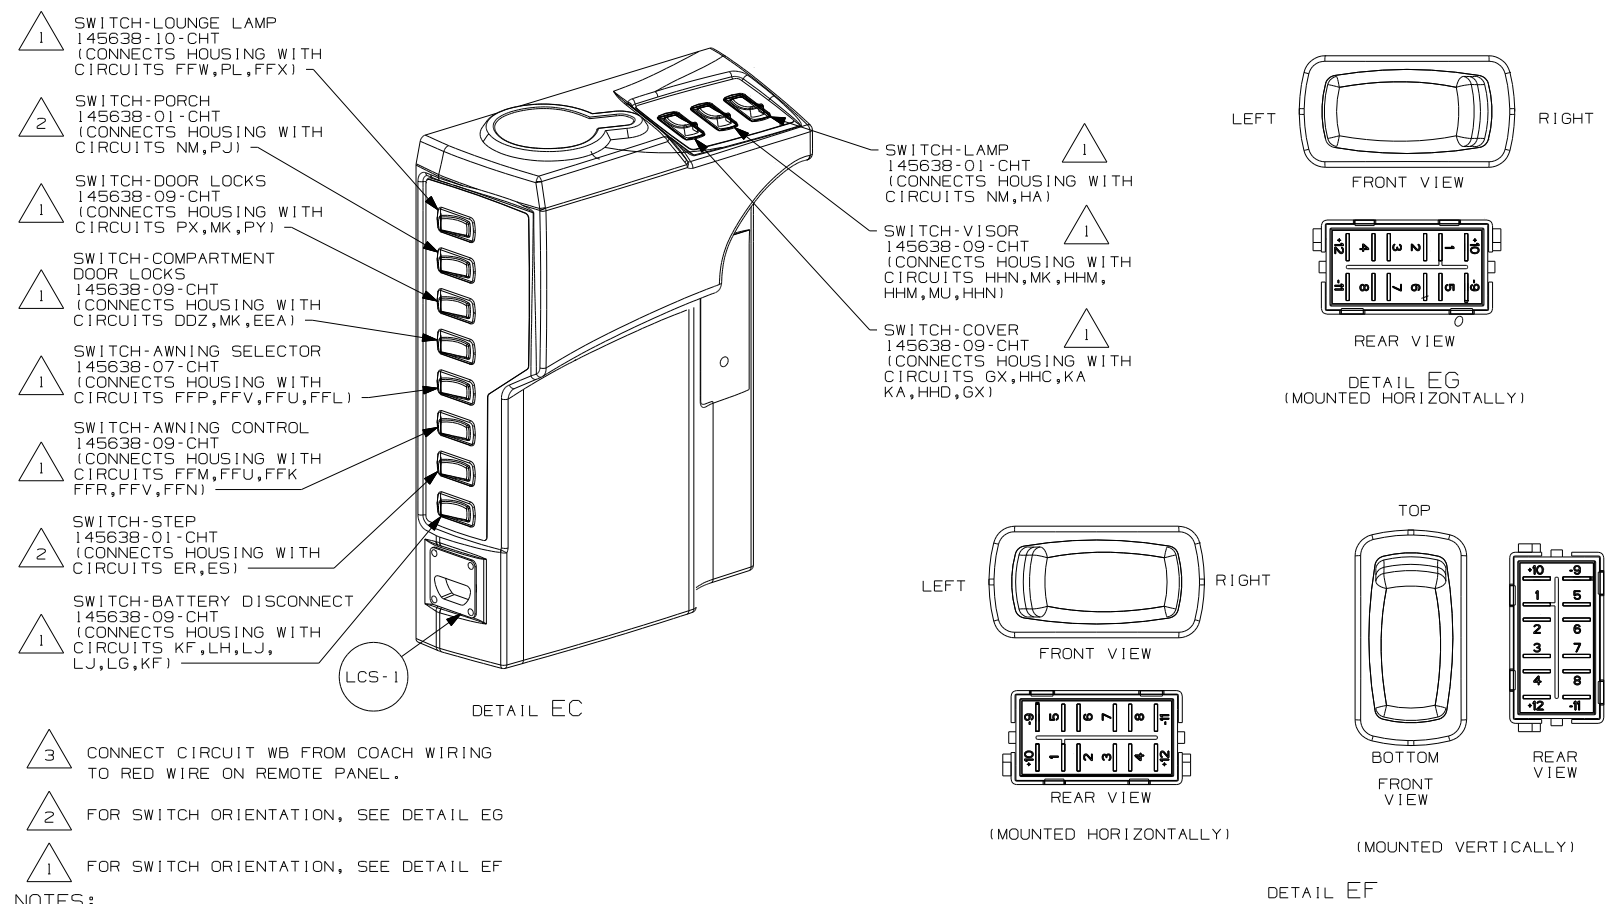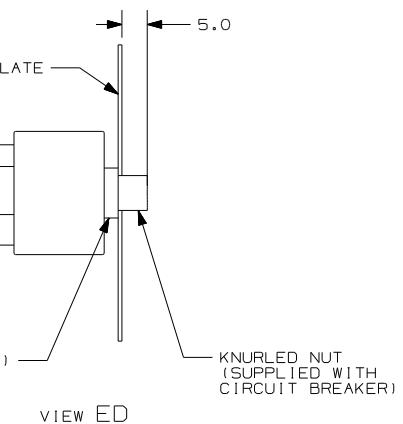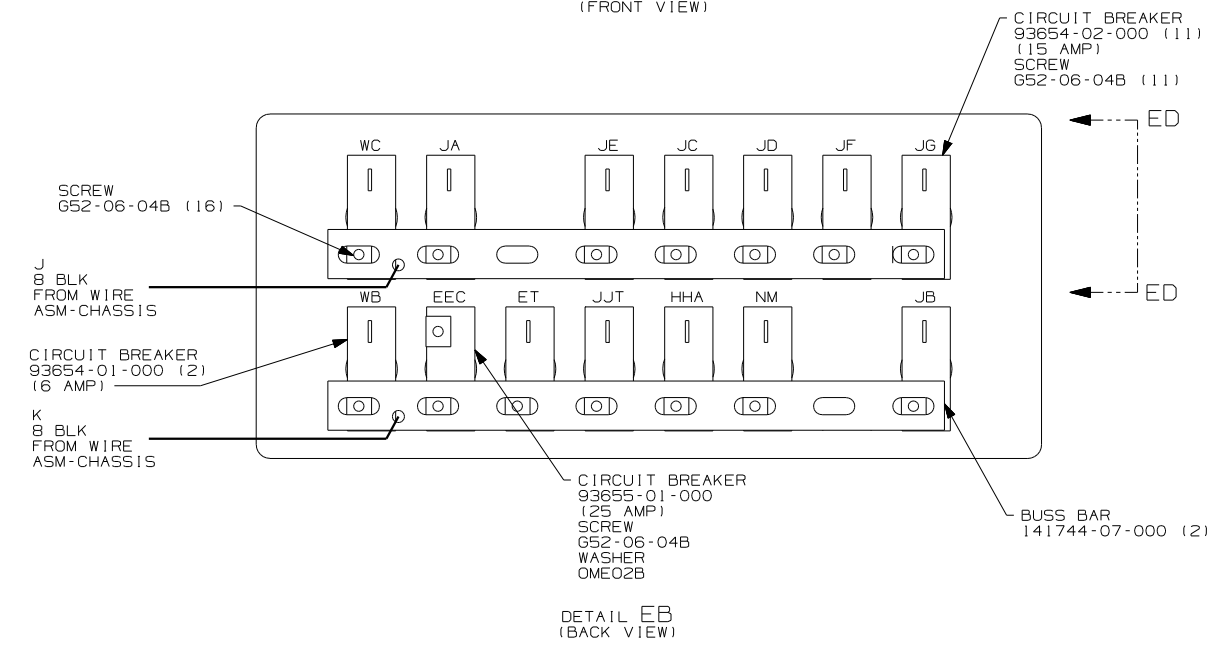


- (29H) A/C CENTRAL-HEAT PUMP
- (13X) INVERTER/CHARGER 2.0 KW
- (IE3) ENERGY MANAGEMENT SYSTEM
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA

FIRST USED	
05 S36GD	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY,12V	
SHEET 5	PART NO 150765

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

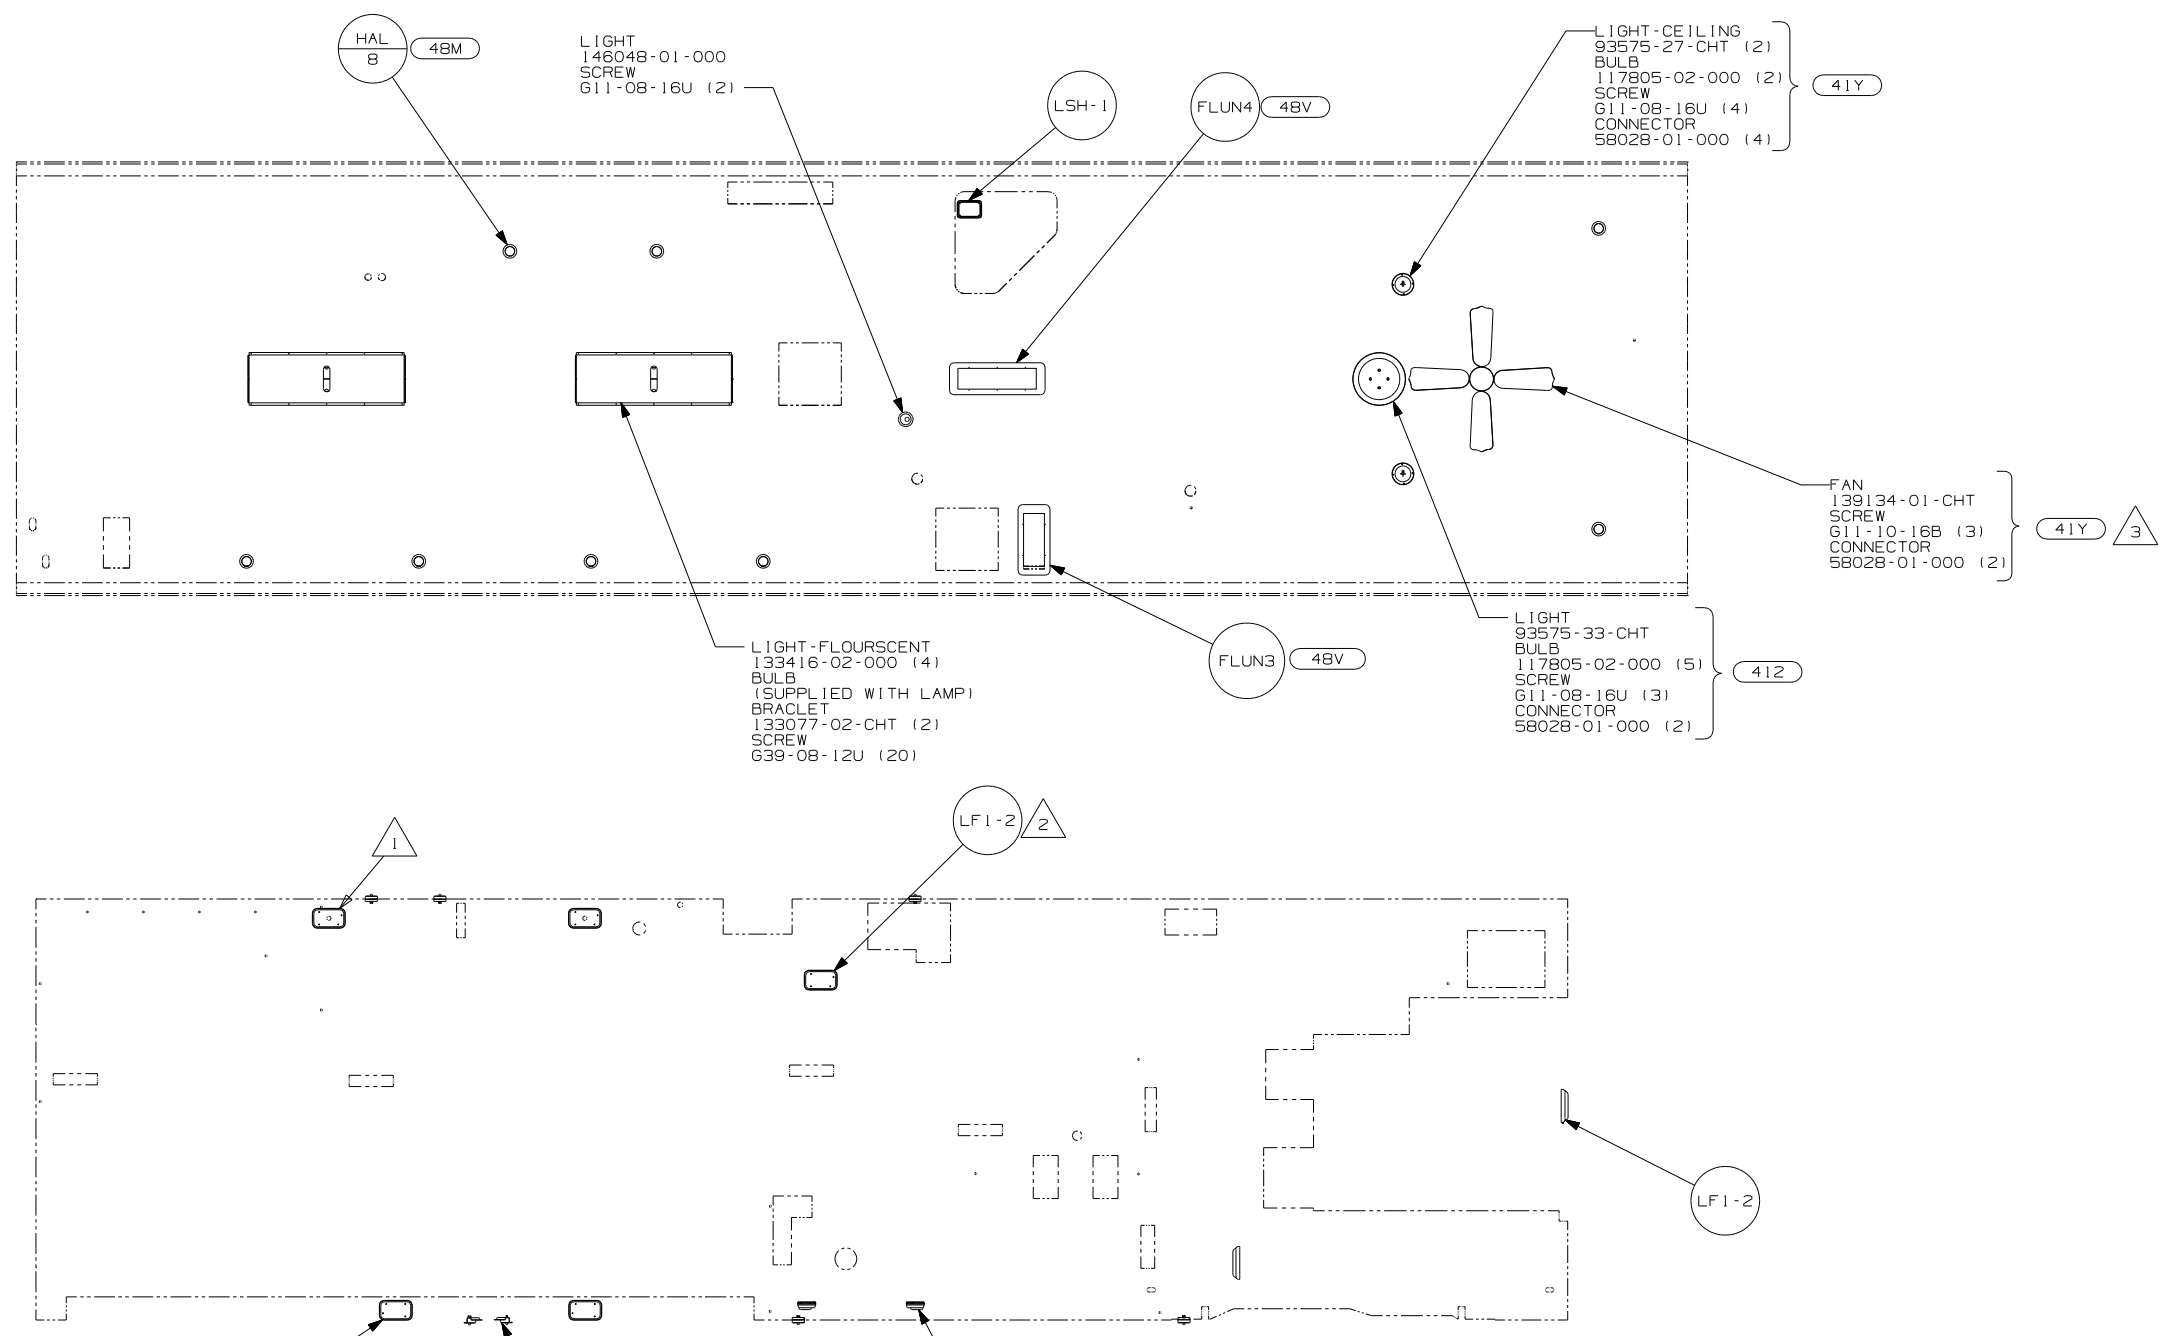

- (41Y) FAN-CEILING
- (412) DECORATIVE LIGHT-CEILING
- (20C) SOUND SYS. DLX. W/O-SURROUND
- (48M) LIGHTS-INCANDESCENT
- (48V) LIGHTS-FLUORESCENT
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA

- NOTES:
- 3 CENTER FAN OVER 25MM HOLE IN ROOF.
 - 2 LIGHT MOUNTED BELOW EXT ENT CTR.
 - 1 LAMPS TO BE MOUNTED WITH SWITCH OUTBOARD AND 75 ±20 FROM EDGE OF FLOOR.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED	05 S36GD
TITLE	DO NOT SCALE DRAWING
TITLE	WIRING INSTL-BODY, 12V
SHEET 6	PART NO 150765

