




DANGER


Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

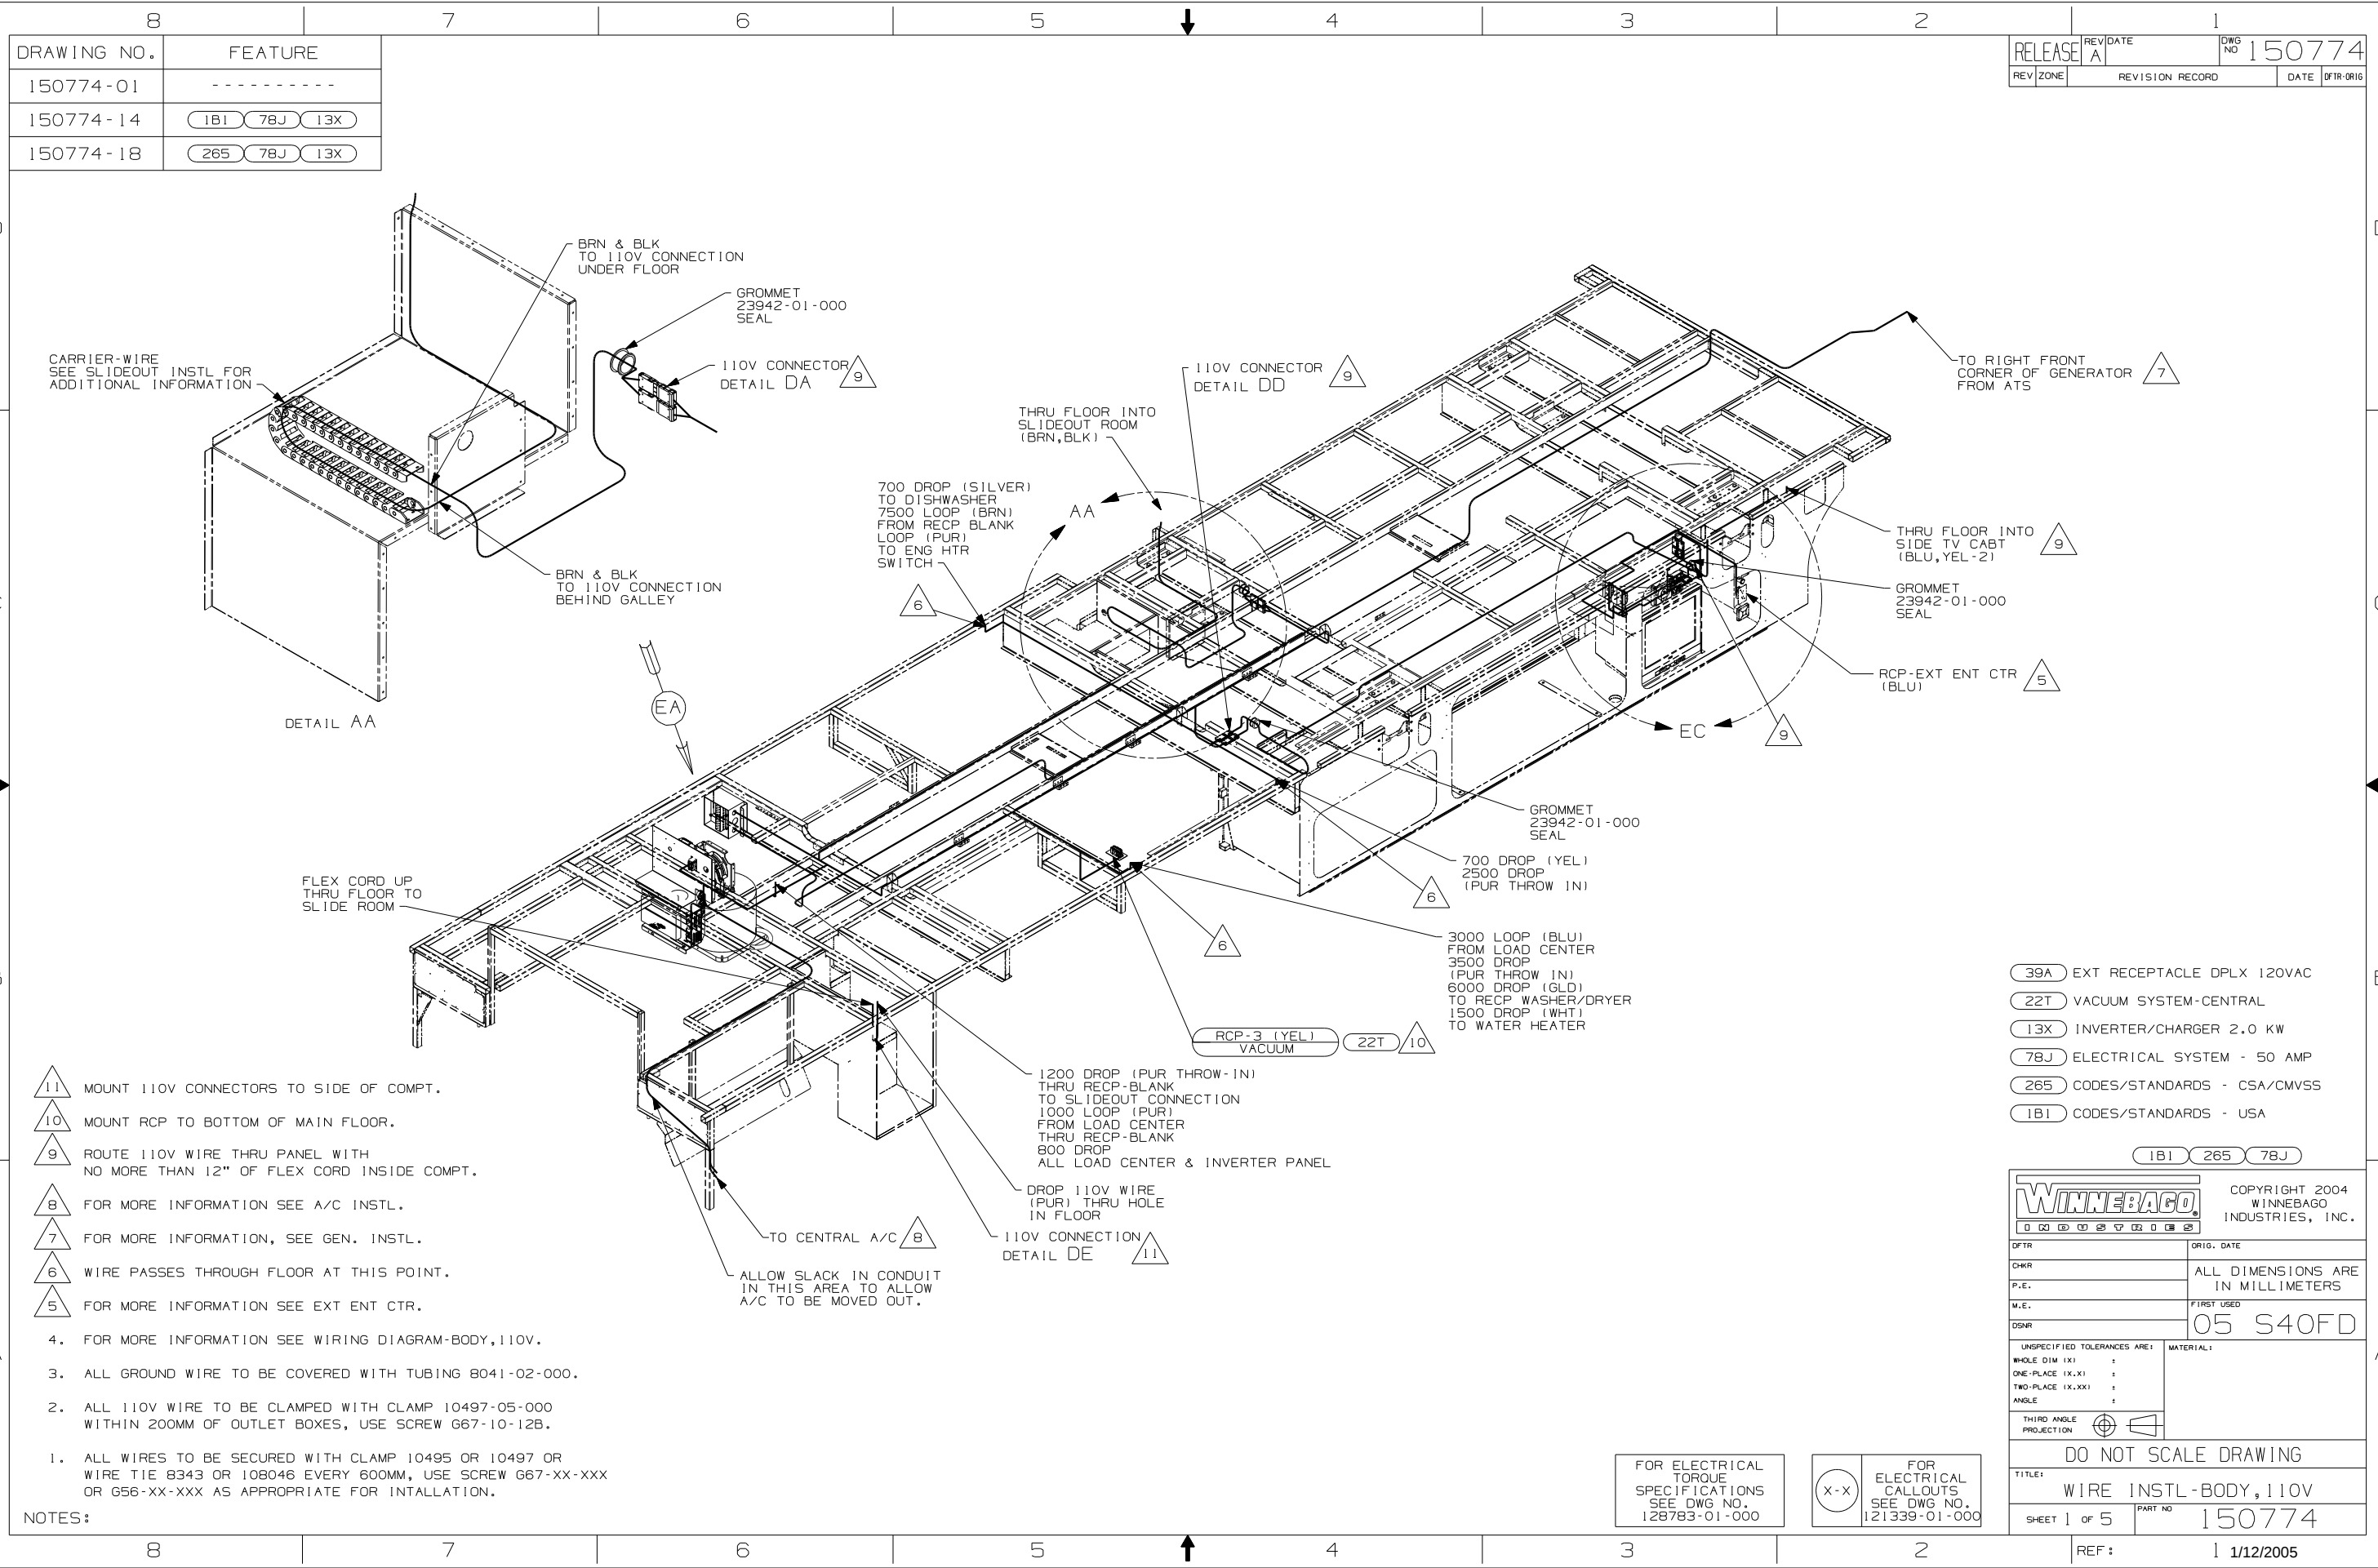

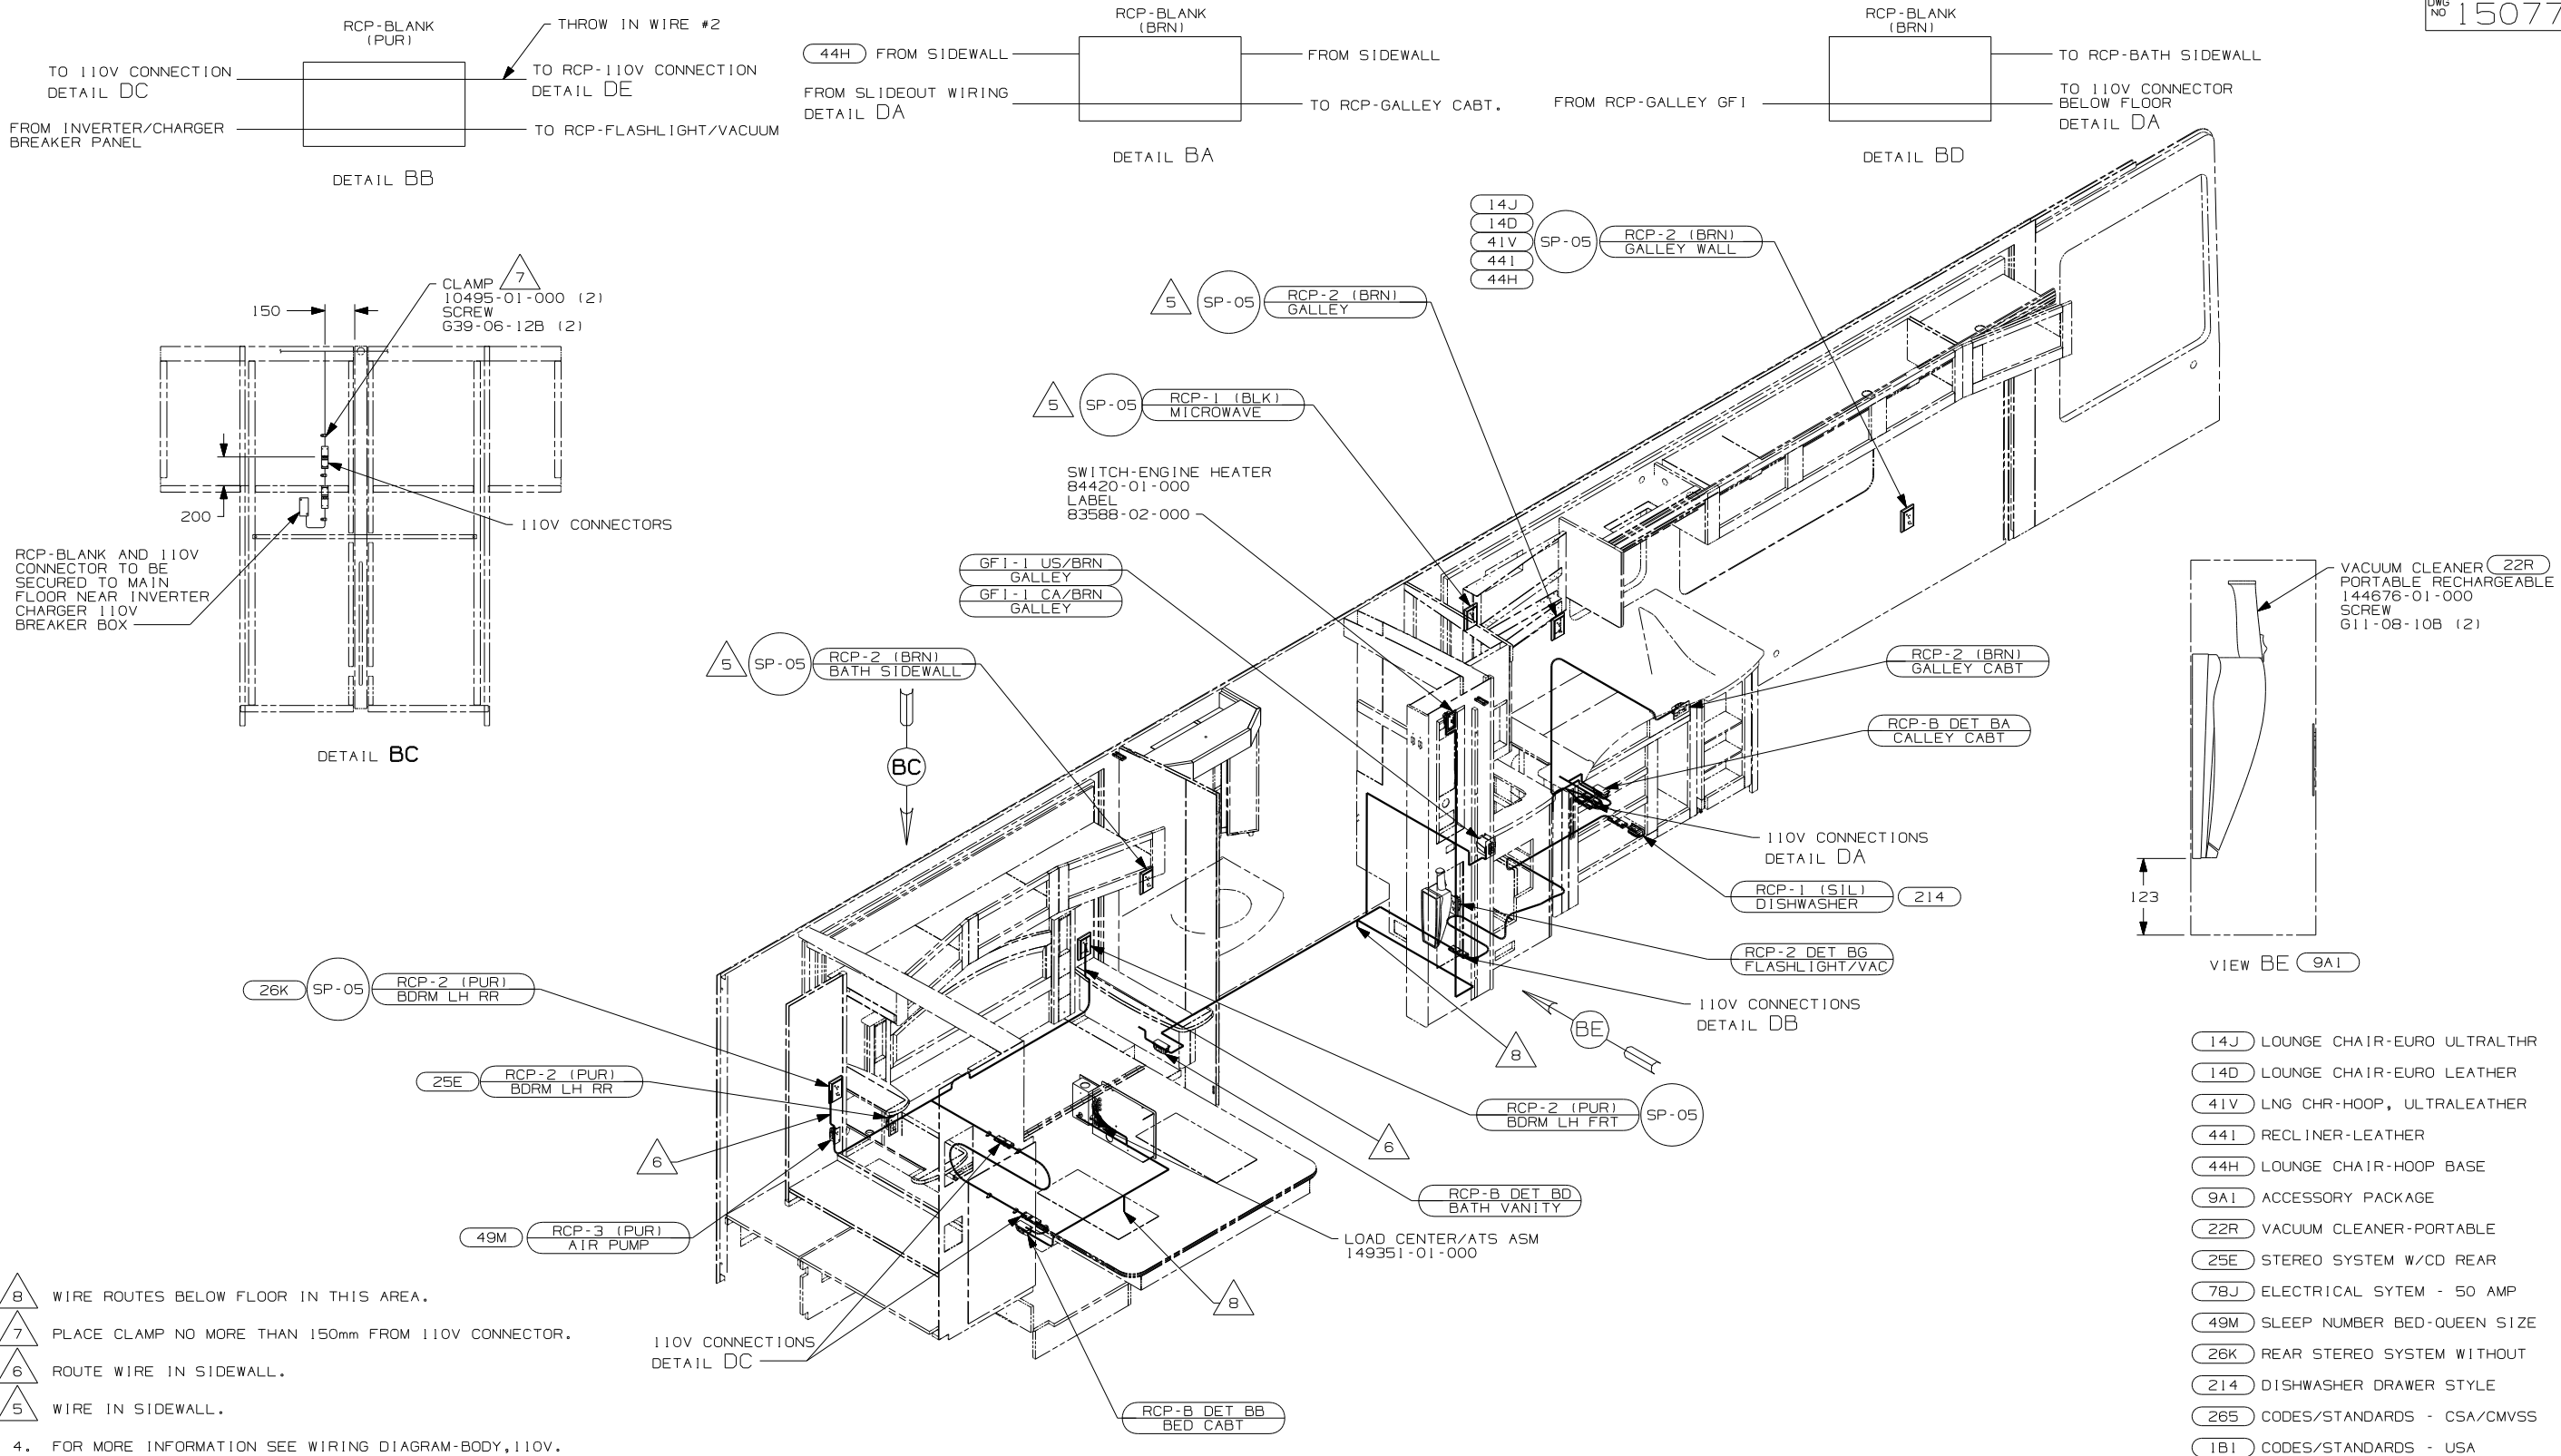


- 8 WIRE ROUTES BELOW FLOOR IN THIS AREA.
- 7 PLACE CLAMP NO MORE THAN 150mm FROM 110V CONNECTOR.
- 6 ROUTE WIRE IN SIDEWALL.
- 5 WIRE IN SIDEWALL.

4. FOR MORE INFORMATION SEE WIRING DIAGRAM-BODY, 110V.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW 667-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW 667-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INTALLATION.

NOTES:

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED		05 S40FD	
DO NOT SCALE DRAWING		TITLE:	
WIRE INSTL-BODY, 110V		PART NO	
SHEET 2		150774	

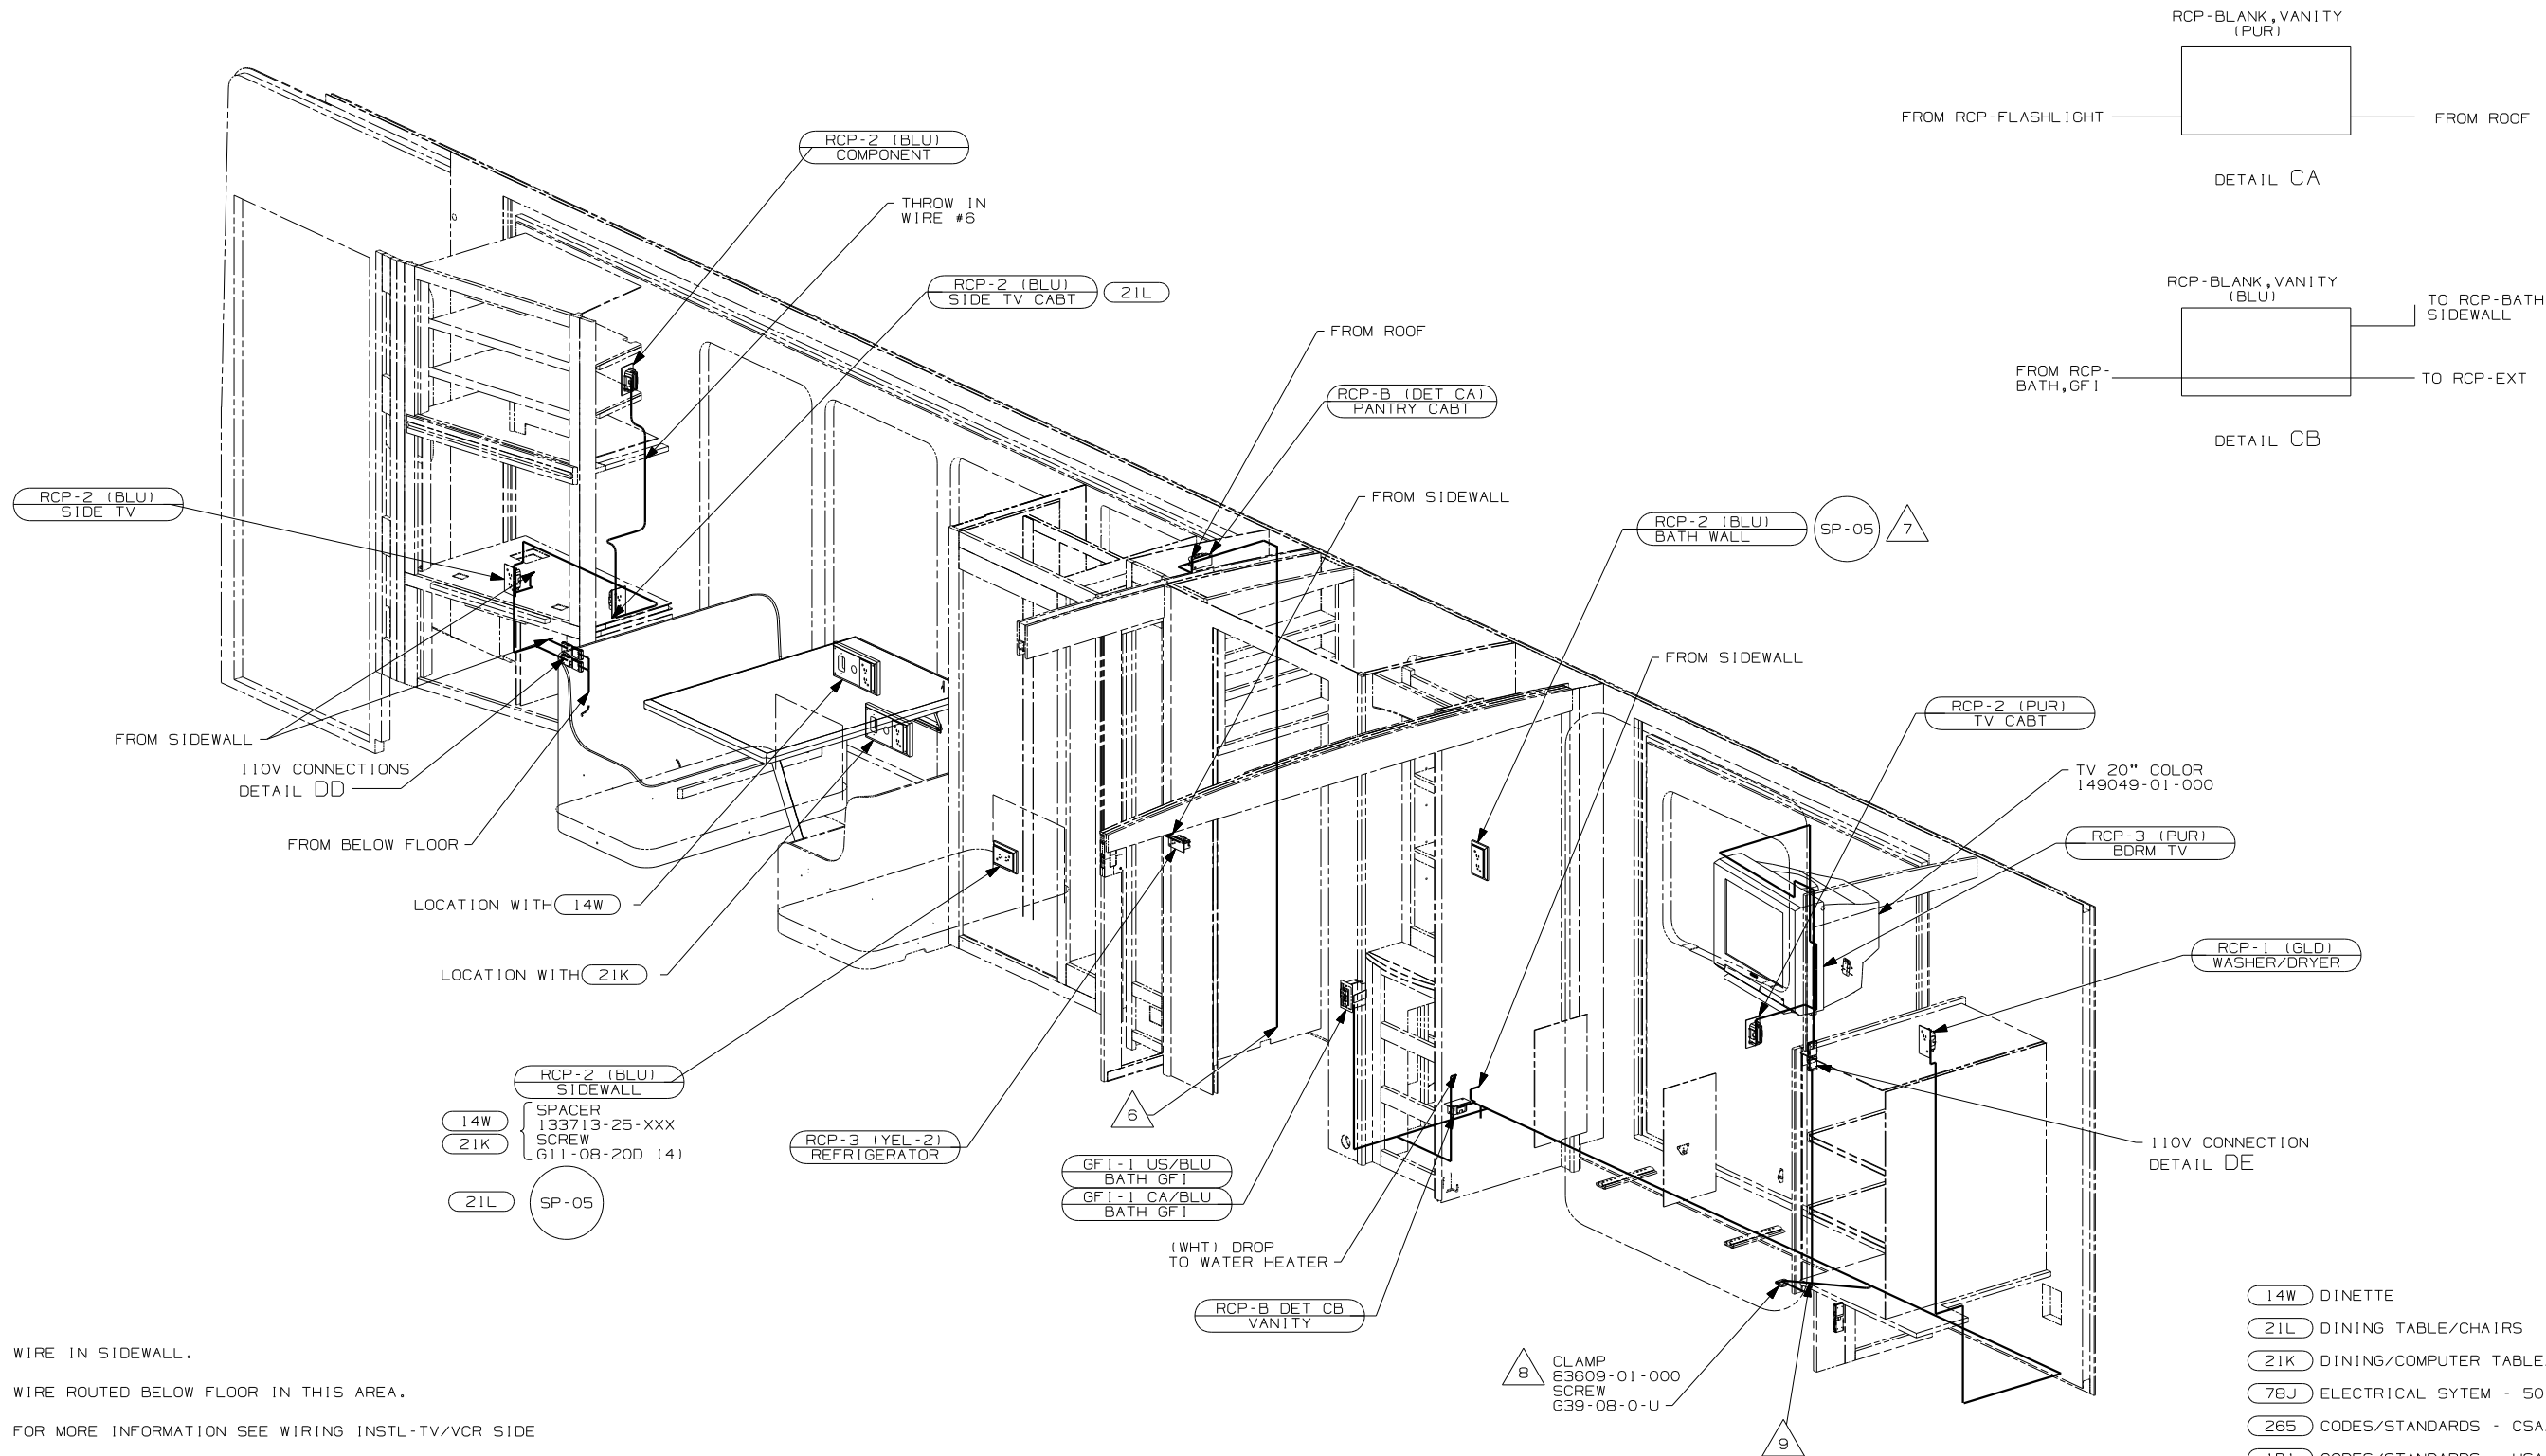

NOTES:


- 7 WIRE IN SIDEWALL.
- 6 WIRE ROUTED BELOW FLOOR IN THIS AREA.
- 5 FOR MORE INFORMATION SEE WIRING INSTL-TV/VCR SIDE.
- 4 FOR MORE INFORMATION SEE WIRING DIAGRAM-BODY, 110V.
- 3 ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
- 2 ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
- 1 ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INTALLATION.

- 9 LEAVE A 250mm LOOP IN FLEXCORD WHEN ROOM IS IN THE OUT POSITION.
- 8 PLACE CLAMP 150mm FROM REAR EDGE OF SLIDEOUT ROOM AND 25mm IN FROM FACE.


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


FIRST USED	
05 S40FD	
DO NOT SCALE DRAWING	
TITLE:	
WIRE INSTL-BODY, 110V	
SHEET 3	PART NO
	150774

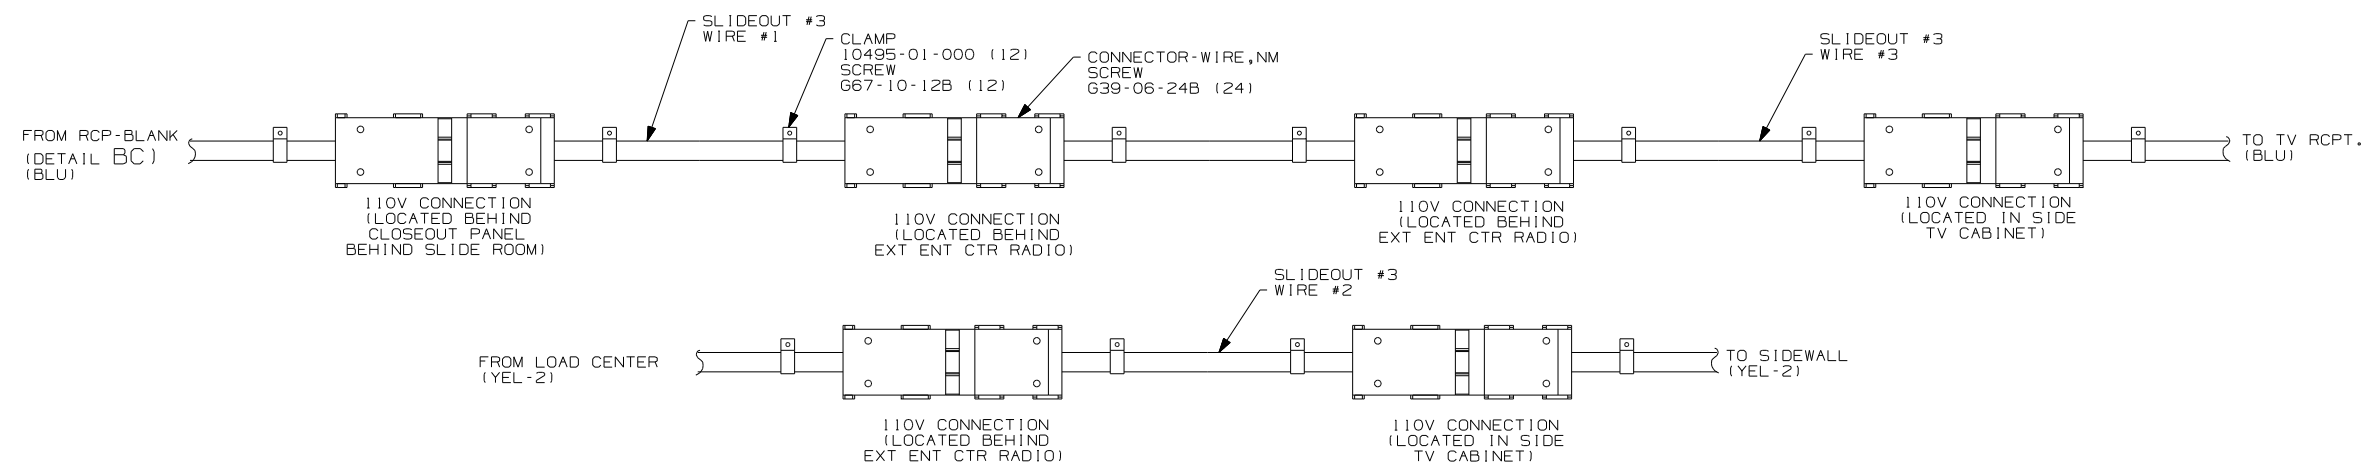


DETAIL DD ID3 ID5

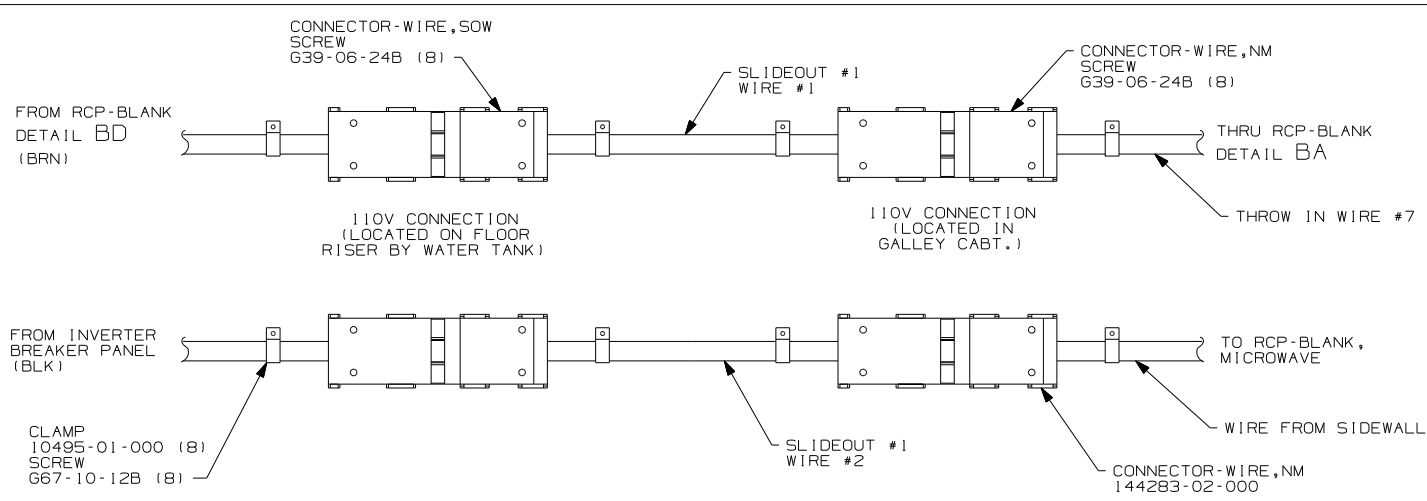


DETAIL DA

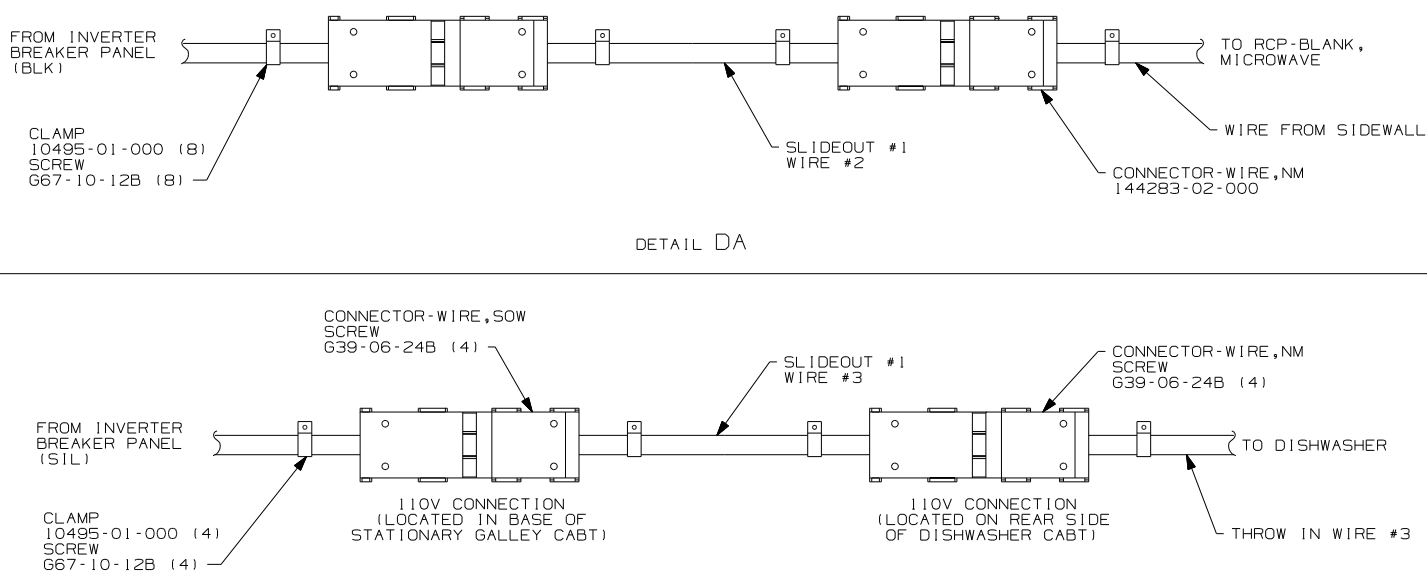

DETAIL DB 214

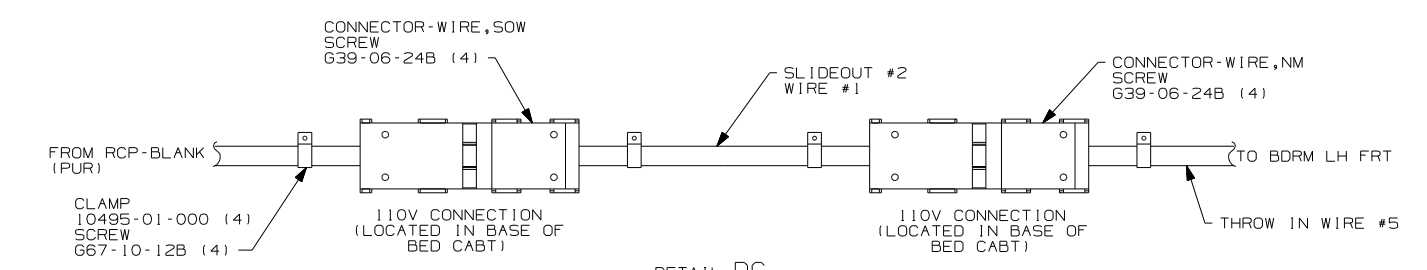


DETAIL DC

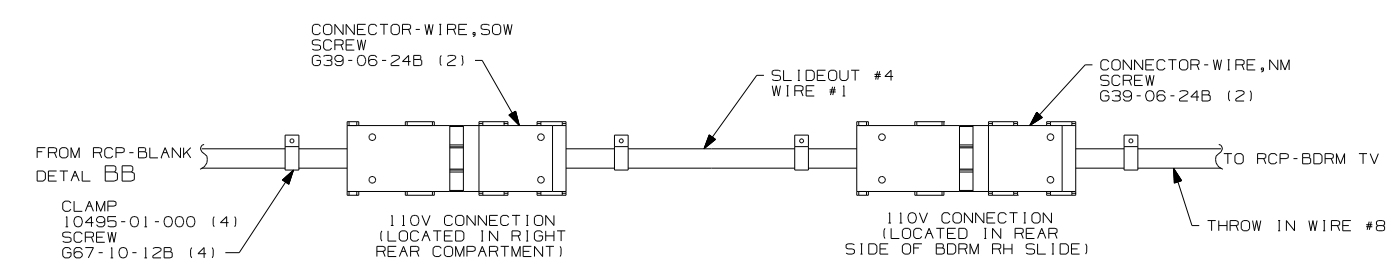


DETAIL DE

- 214 DISHWASHER DRAWER STYLE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1D5 ENTERTAINMENT CENTR/EXT W/CD
- 1D3 ENTERTAIN CENTR/EXT TV-DVD
- 1B1 CODES/STANDARDS USA


1B1		265	
FIRST USED			
05 S40FD			
DO NOT SCALE DRAWING			
TITLE:			
WIRE INSTL-BODY, 110V			
SHEET 4		PART NO	150774

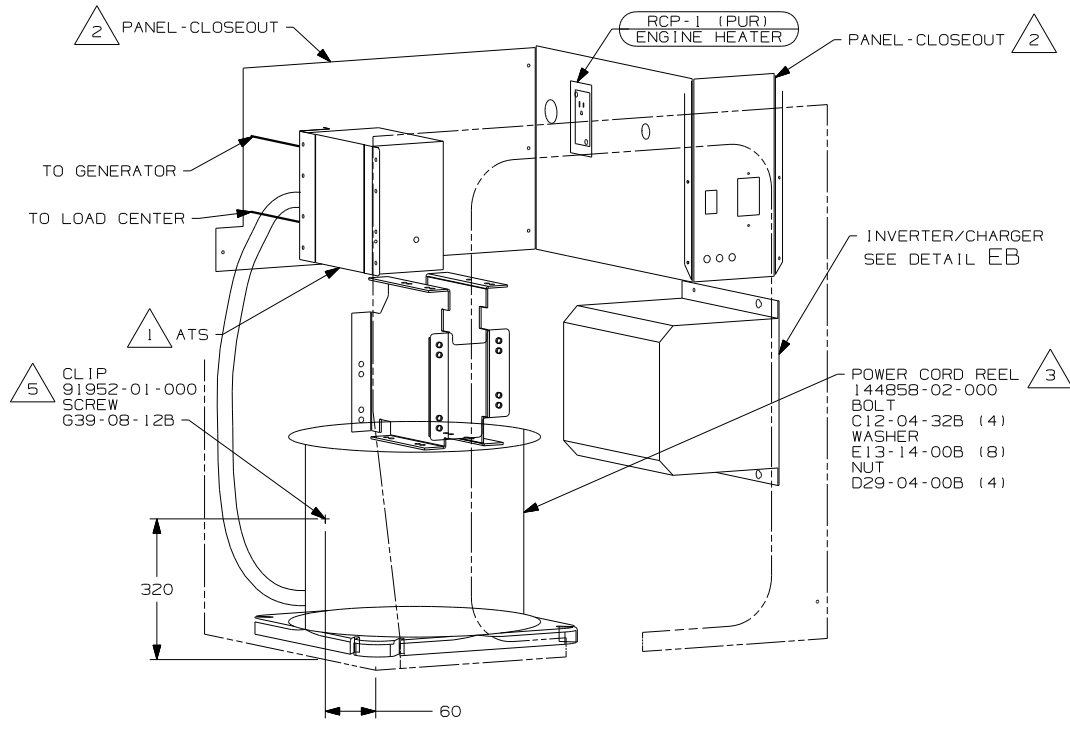


VIEW EA 12F

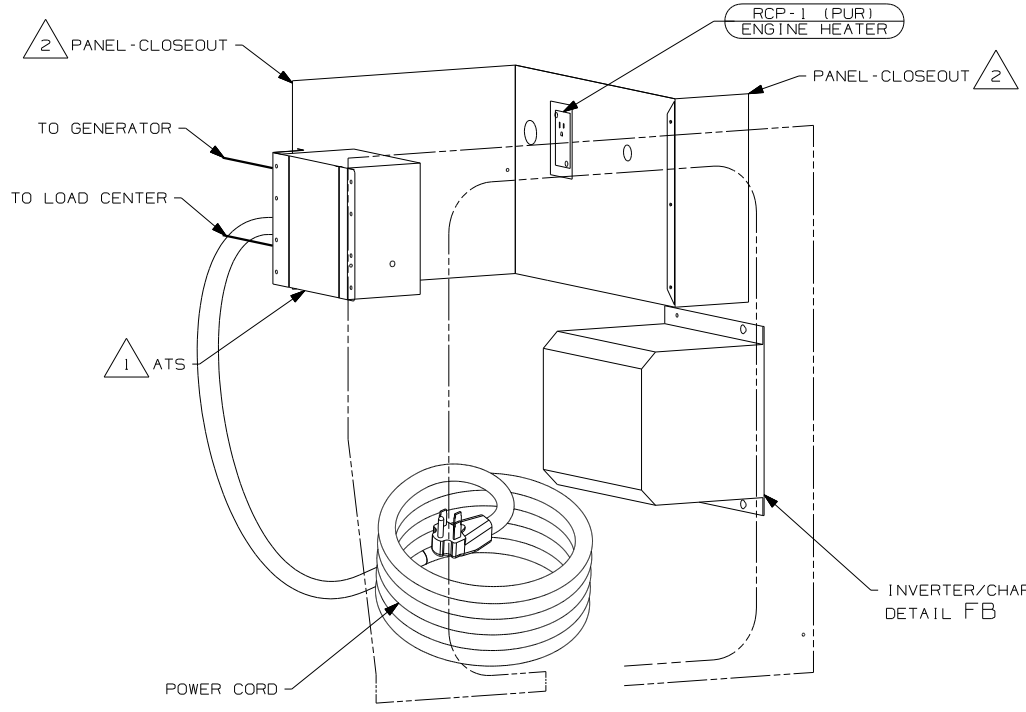


VIEW EA 12G 4

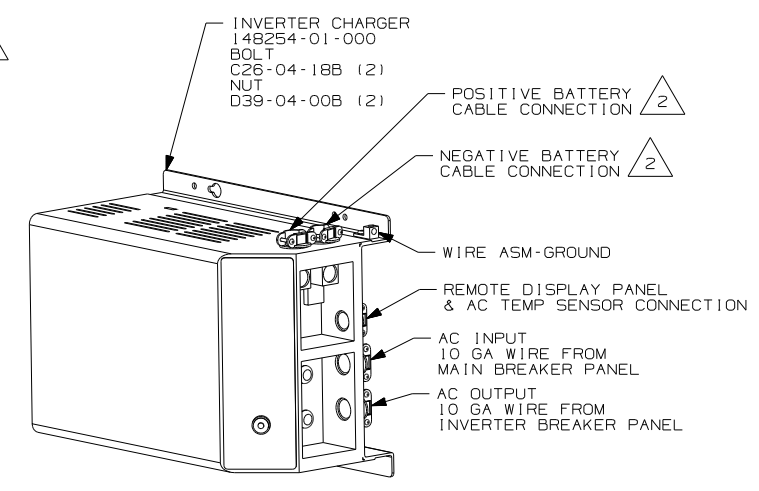

DETAIL EB

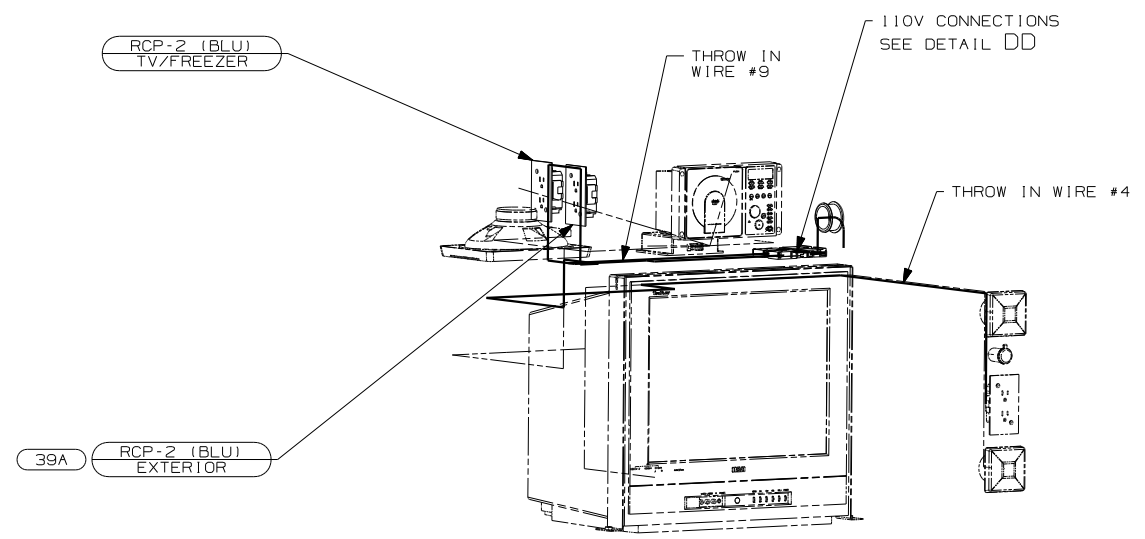

DETAIL EC 1D3

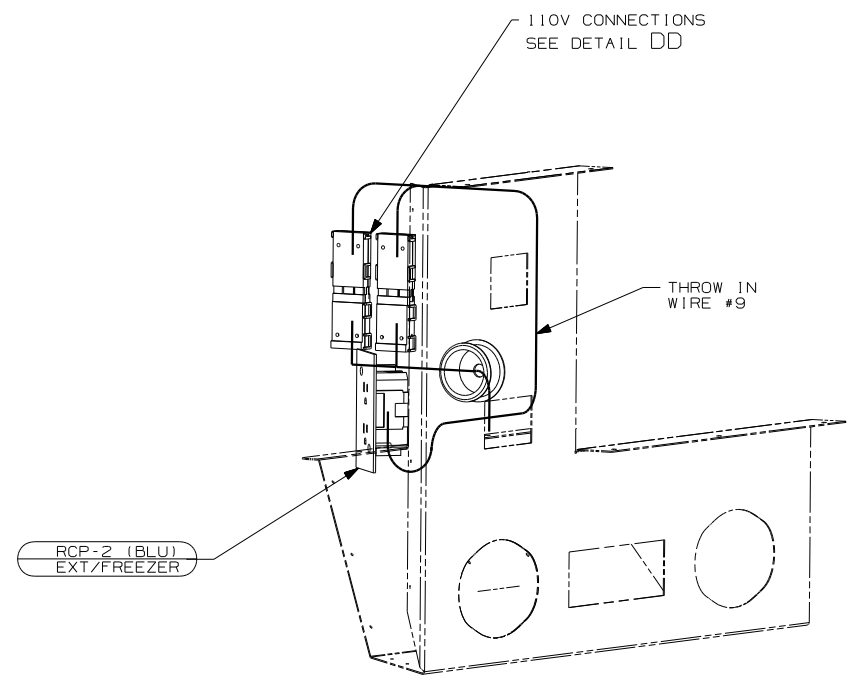

DETAIL EC 1D5

- 39A EXT RECEPTACLE DPLX 120VAC
- 12G POWER CORD REEL-WITHOUT
- 12F POWER CORD REEL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1D5 ENTERTAINMENT CENTR/EXT W/CD
- 1D3 ENTERTAIN CENTR/EXT TV-DVD
- 1B1 CODES/STANDARDS USA

- 5 FASTEN CLIP TO INSIDE LEFT COMPARTMENT WALL.
- 4 PLUG POWER CORD REEL MOUNTING HOLES WITH PLUG-PLASTIC 81211-01-000 (4).
- 3 INSERT BOLT FROM BOTTOM OF COMPT.
- 2 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 1 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

NOTES:

1B1 265	
FIRST USED 05 S40FD	
DO NOT SCALE DRAWING	
TITLE: WIRE INSTL-BODY, 110V	
SHEET 5	PART NO 150774