




**DANGER**

**Danger of electrical shock, burns or death.** Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



**CAUTION**

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

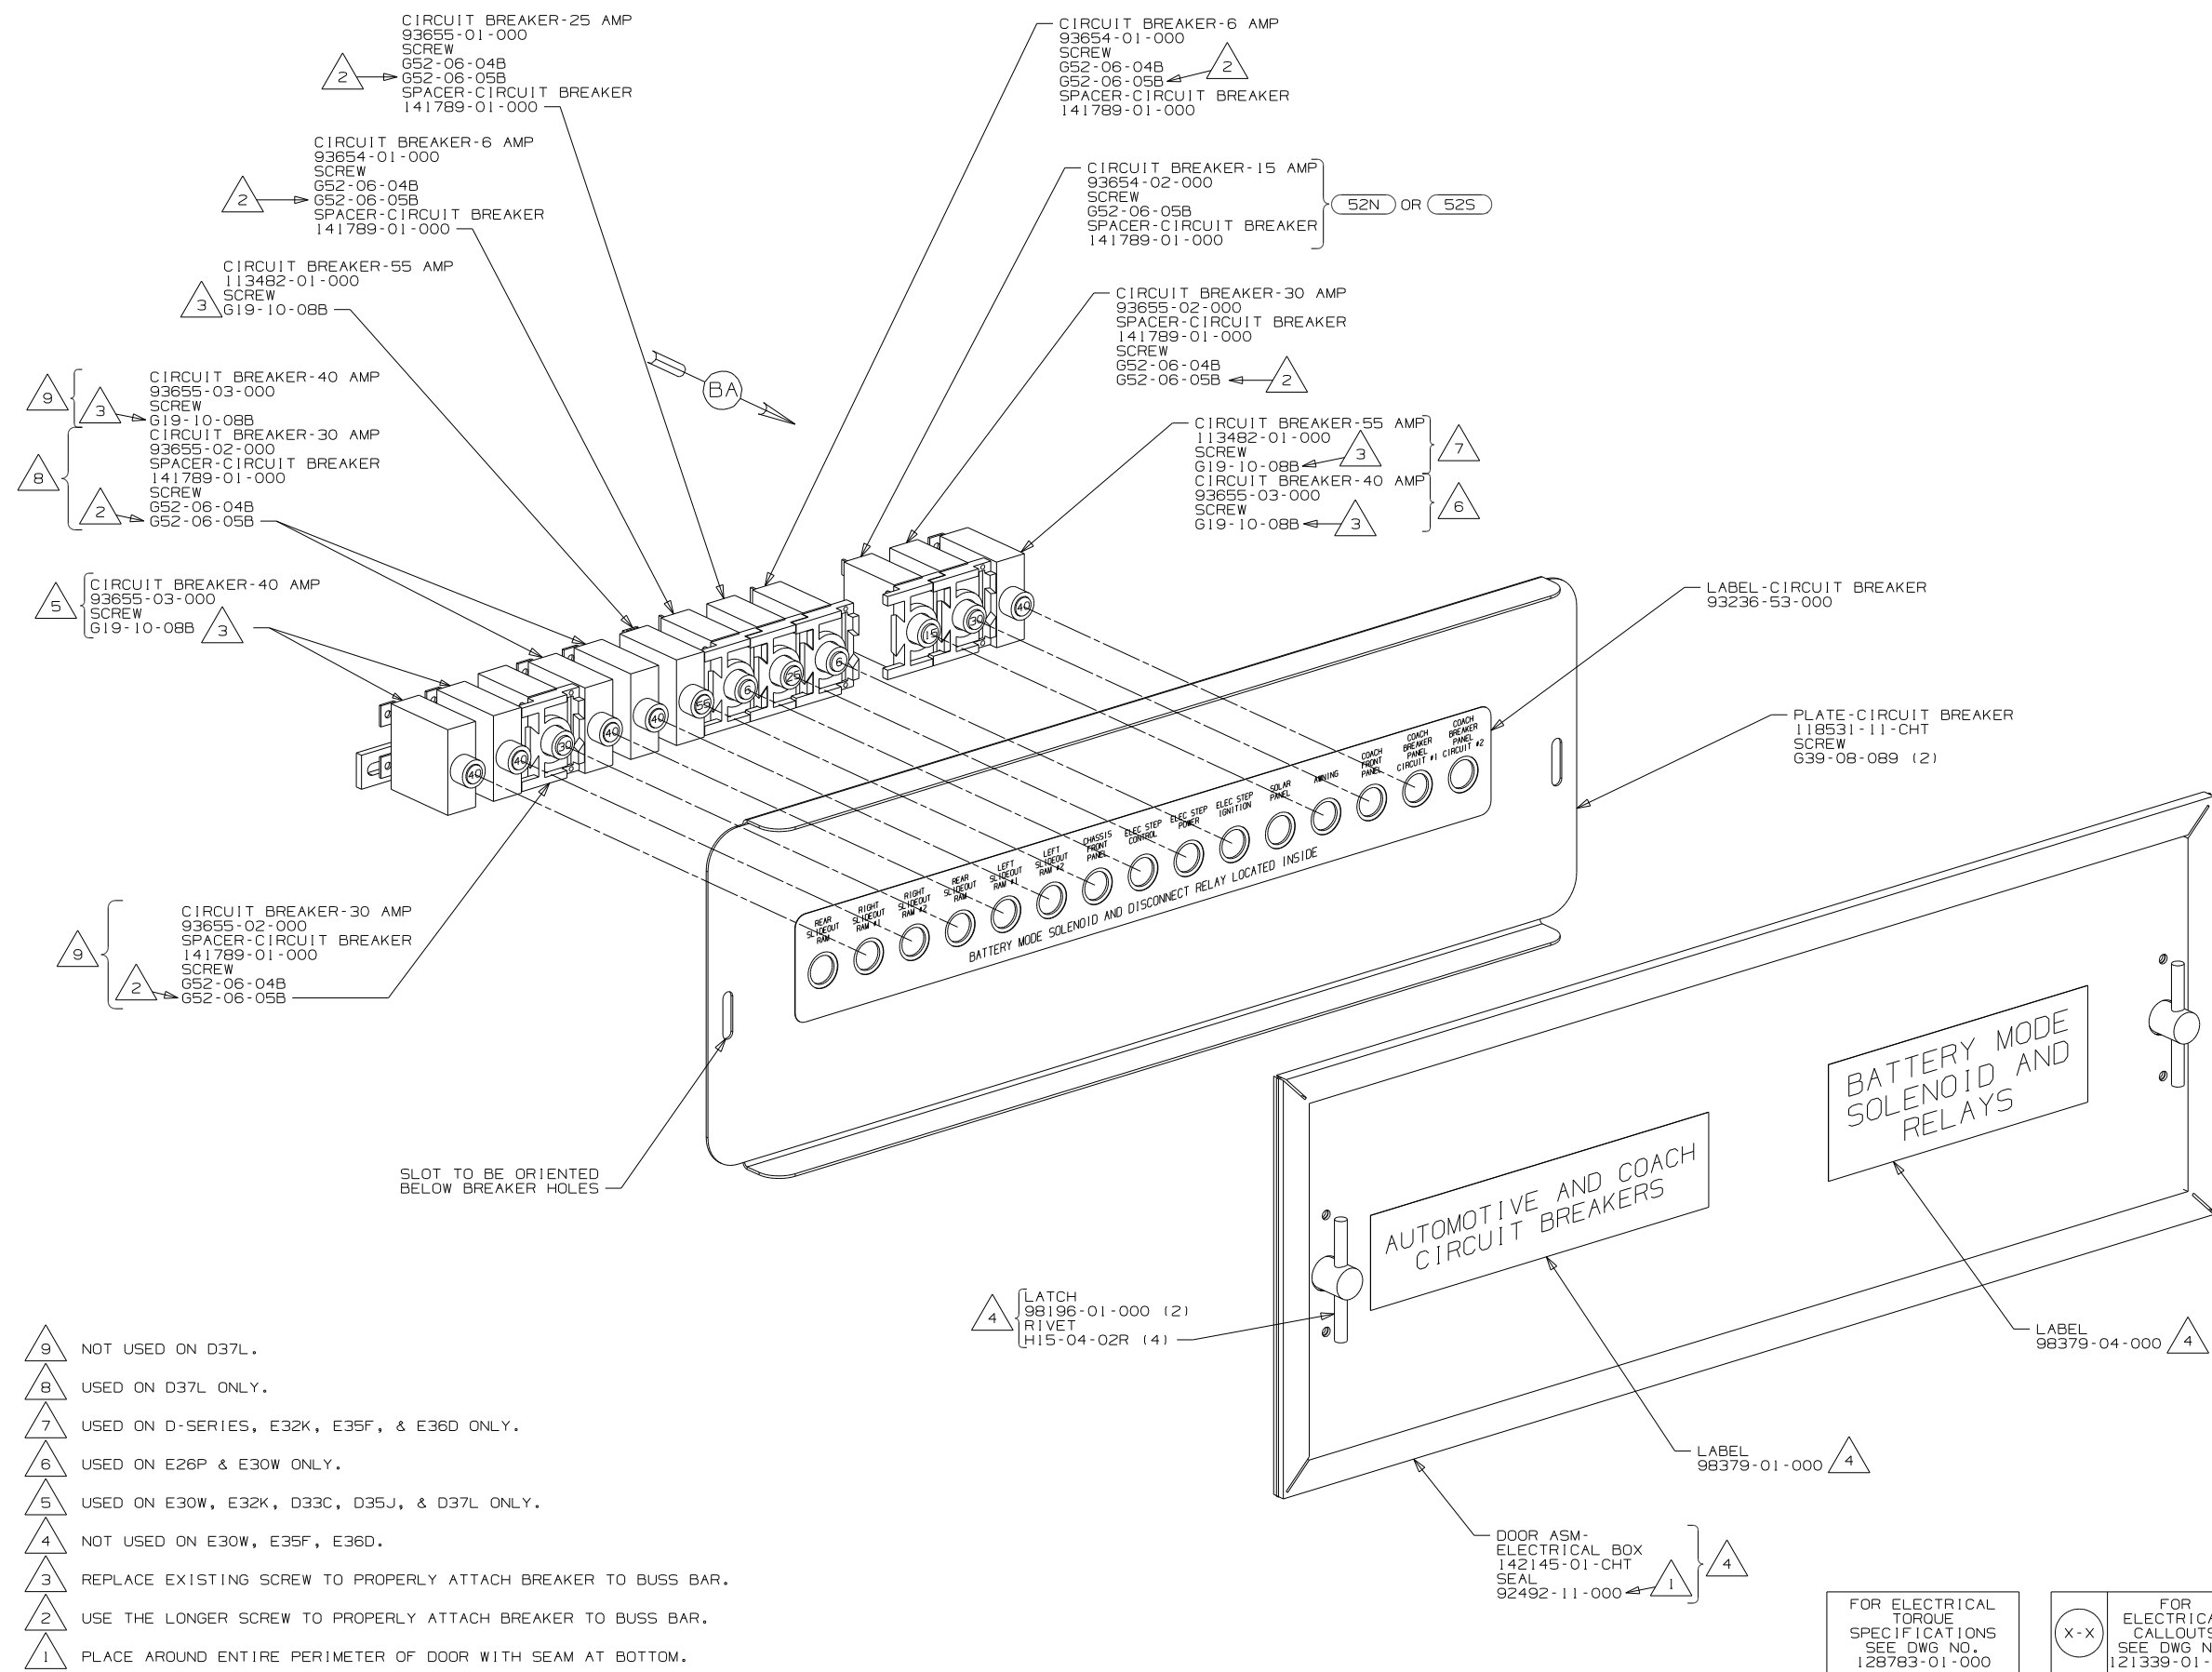


- NOTES:
- 9 NOT USED ON D37L.
  - 8 USED ON D37L ONLY.
  - 7 USED ON D-SERIES, E32K, E35F, & E36D ONLY.
  - 6 USED ON E26P & E30W ONLY.
  - 5 USED ON E30W, E32K, D33C, D35J, & D37L ONLY.
  - 4 NOT USED ON E30W, E35F, E36D.
  - 3 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
  - 2 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
  - 1 PLACE AROUND ENTIRE PERIMETER OF DOOR WITH SEAM AT BOTTOM.

- 525 AWNING - 2ND PATIO, ELECTRIC
- 52N AWNING - PATIO, ELECTRIC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


<b>WINNEBAGO</b>		COPYRIGHT 2011 WINNEBAGO INDUSTRIES, INC.	
DFTR	ORIG. DATE		
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS		
P.E.	FIRST USED	11 D&E-SER	
M.E.	DSNR		
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
THIRD ANGLE PROJECTION			

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

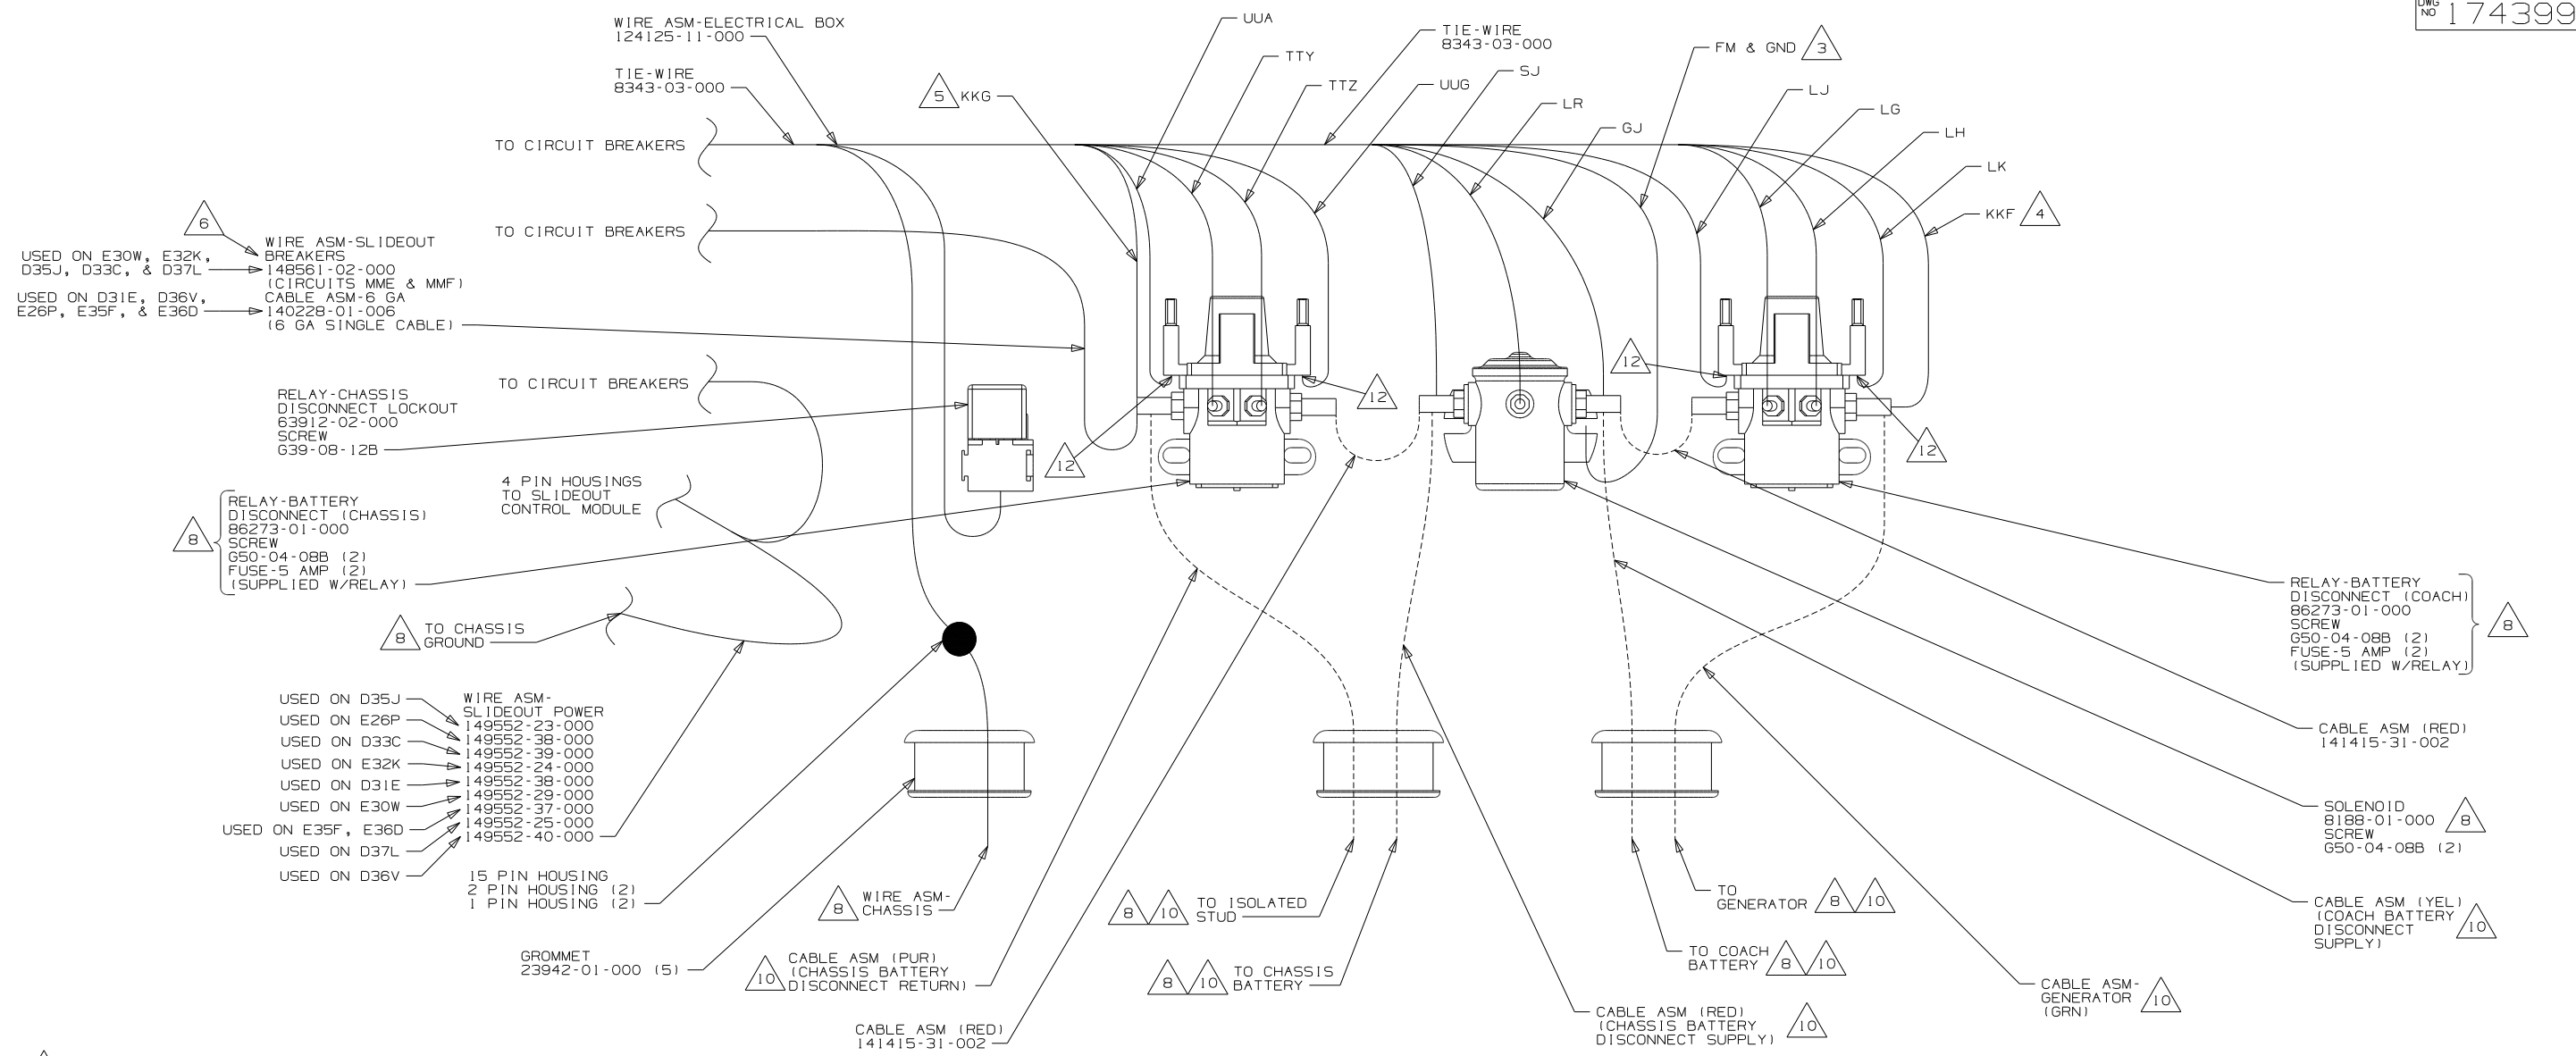

- 14 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.
- 13 FROM WIRE ASM-SLIDEOUT POWER.
- 12 INSERT TERMINAL FROM CIRCUIT LJ, UUA, LK OR UUG INTO FUSE HOLDER ON RELAY-BATTERY DISCONNECT.
- 11 FROM WIRE ASM-CHASSIS.
- 10 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 9 WITHOUT (52N) OR (52S)
- 8 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 7 IF CIRCUIT NOT USED, TAPE BACK TO HARNESS.
- 6 WIRE MARKED WITH RED TAPE.
- 5 WIRE MARKED WITH PURPLE TAPE.
- 4 WIRE MARKED WITH YELLOW TAPE.
- 3 SECURE WITH SOLENOID MOUNTING SCREW.

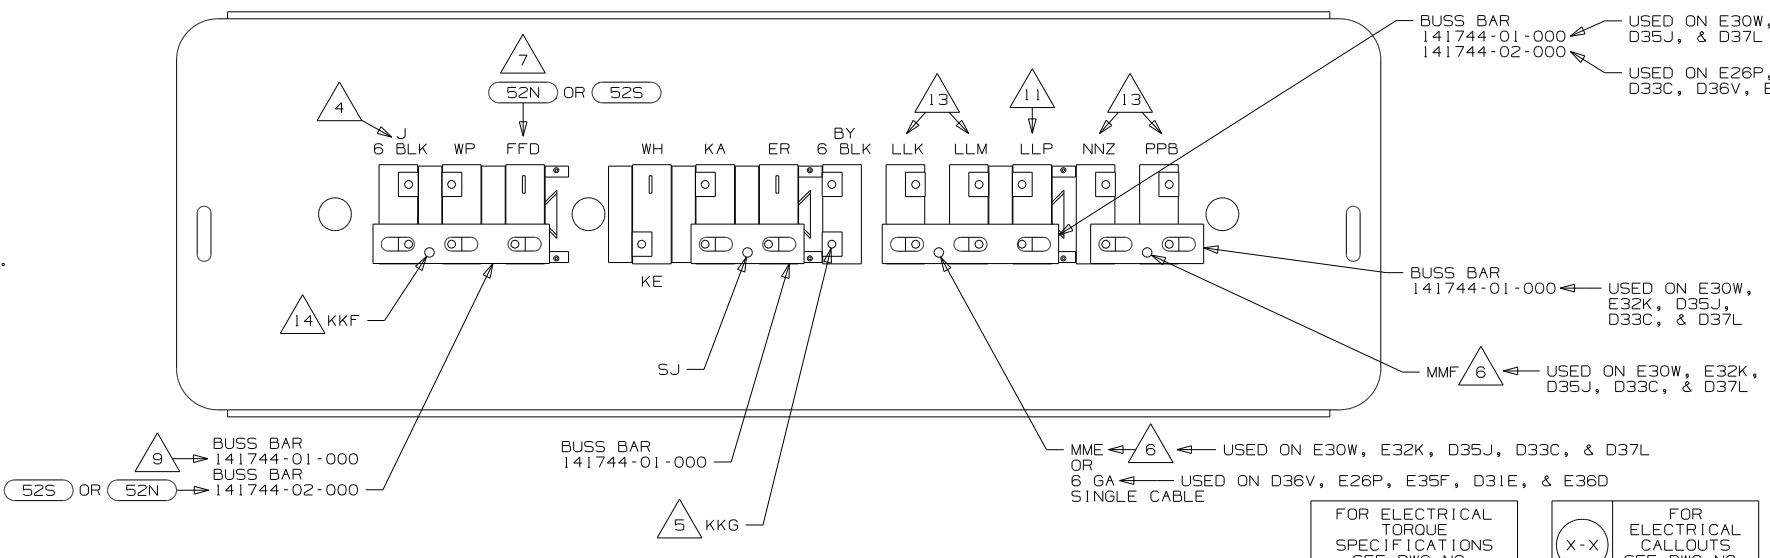

- USED ON E30W, E32K, D35J, & D37L
- USED ON E26P, D31E, D33C, D36V, E35F, & E36D
- USED ON E30W, E32K, D35J, D33C, & D37L
- USED ON E30W, E32K, D35J, D33C, & D37L
- USED ON D36V, E26P, E35F, D31E, & E36D

NOTES:  
 1. LEGEND: — WINNEBAGO: - - - - - CABLE: - - - - - CHASSIS SUPPLIED WIRING.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- (52S) AWNING - 2ND PATIO, ELECTRIC
- (52N) AWNING - PATIO, ELECTRIC
- (265) CODES/STANDARDS - CSA/CMVSS
- (1B1) CODES/STANDARDS - USA

FIRST USED	
11 D&E - SER	
DO NOT SCALE DRAWING	
TITLE: CHASSIS ELECTRICAL BOX ASM	
SHEET 2	PART NO 174399 REV