






DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

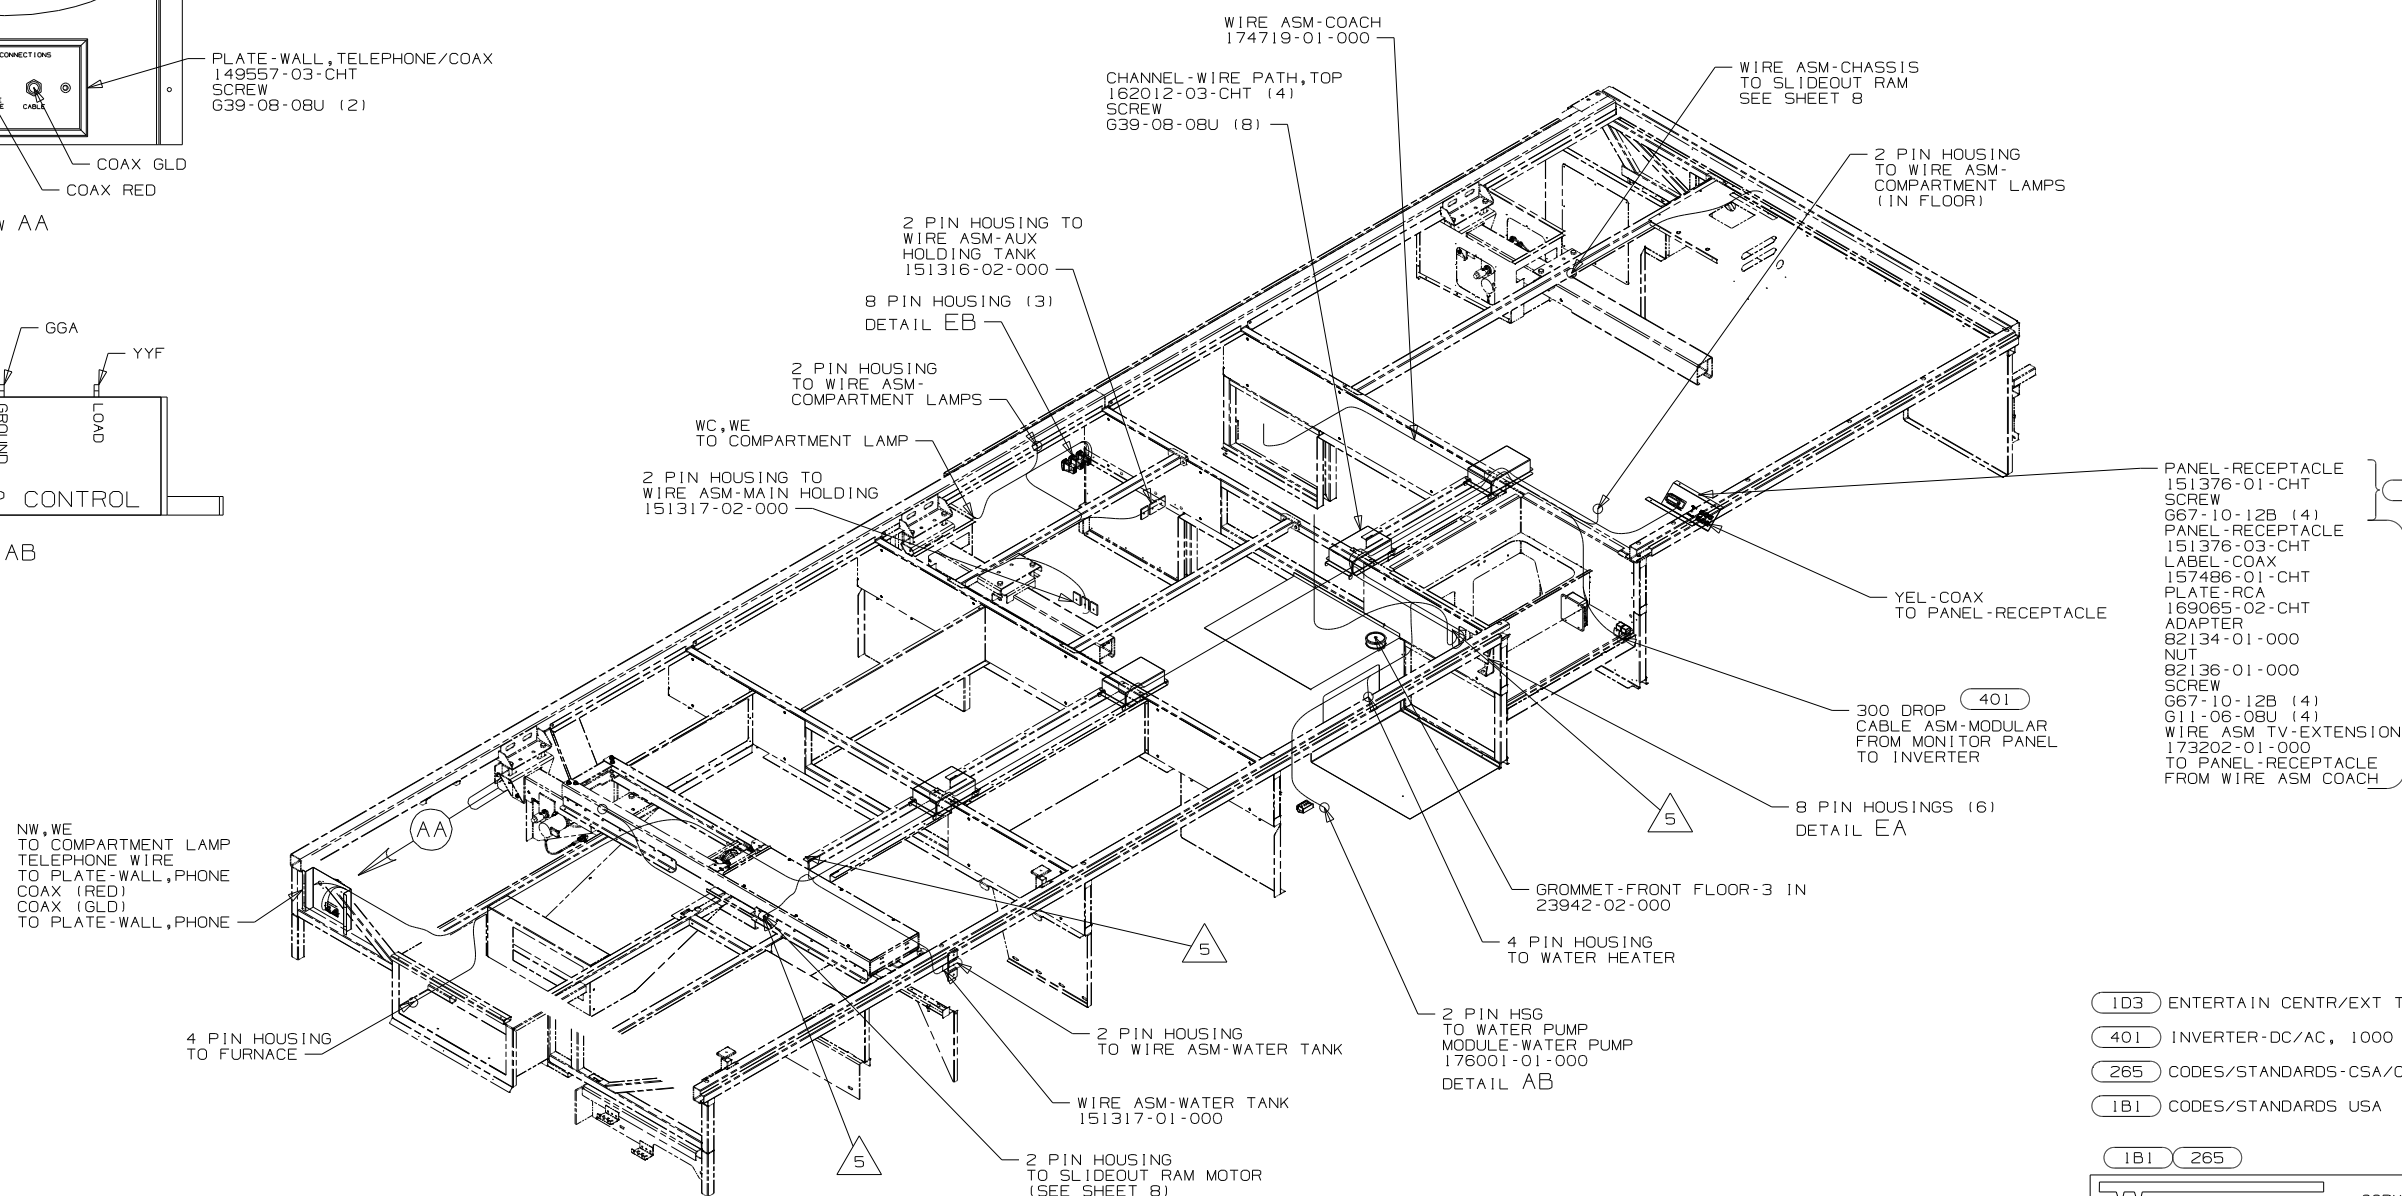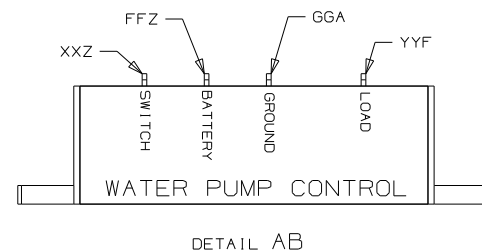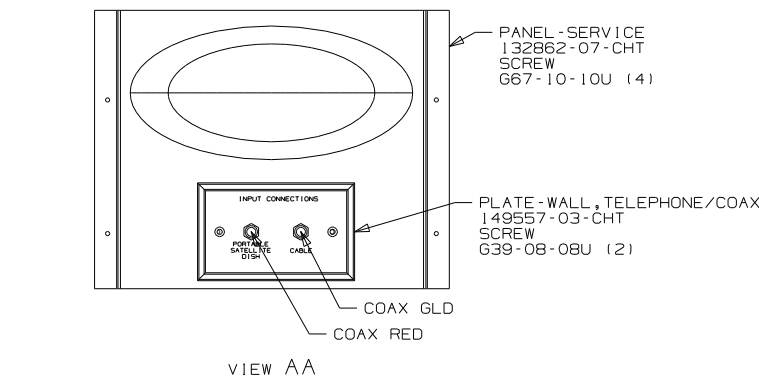

- 103 ENTERTAIN CENTR/EXT TV-DVD
401 INVERTER-DC/AC, 1000 WATT
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

		COPYRIGHT 1980 WINNEBAGO INDUSTRIES, INC.	
DFT# _____ CHK# _____ P.E. _____ M.E. _____ DSN# _____		ORIG. DATE _____ ALL DIMENSIONS ARE IN MILLIMETERS FIRST USED _____ 11 J32H	
UNDESIGNED TOLERANCES ARE: WHOLE DIM (X) ± 3 ONE-PLACE (X,X) ± 1.5 TWO-PLACE (X,XX) ± 0.50 ANGLE ± 1° THIRD ANGLE PROJECTION 		MATERIAL: _____	
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL - BODY, 12V			
SHEET 1 OF 8		PART NO 174641 REV _____	

5 WIRE PASSES THROUGH FLOOR AT THIS POINT.

4 WITHOUT ID3

3. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASS OVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIME WITH PRIMER 94.


2. SEE WIRING DIAGRAM-BODY,12V FOR ADDITIONAL INFORMATION.

1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR WIRE TIE 8343-02-000 EVERY 600MM UNLESS OTHERWISE SPECIFIED.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	---

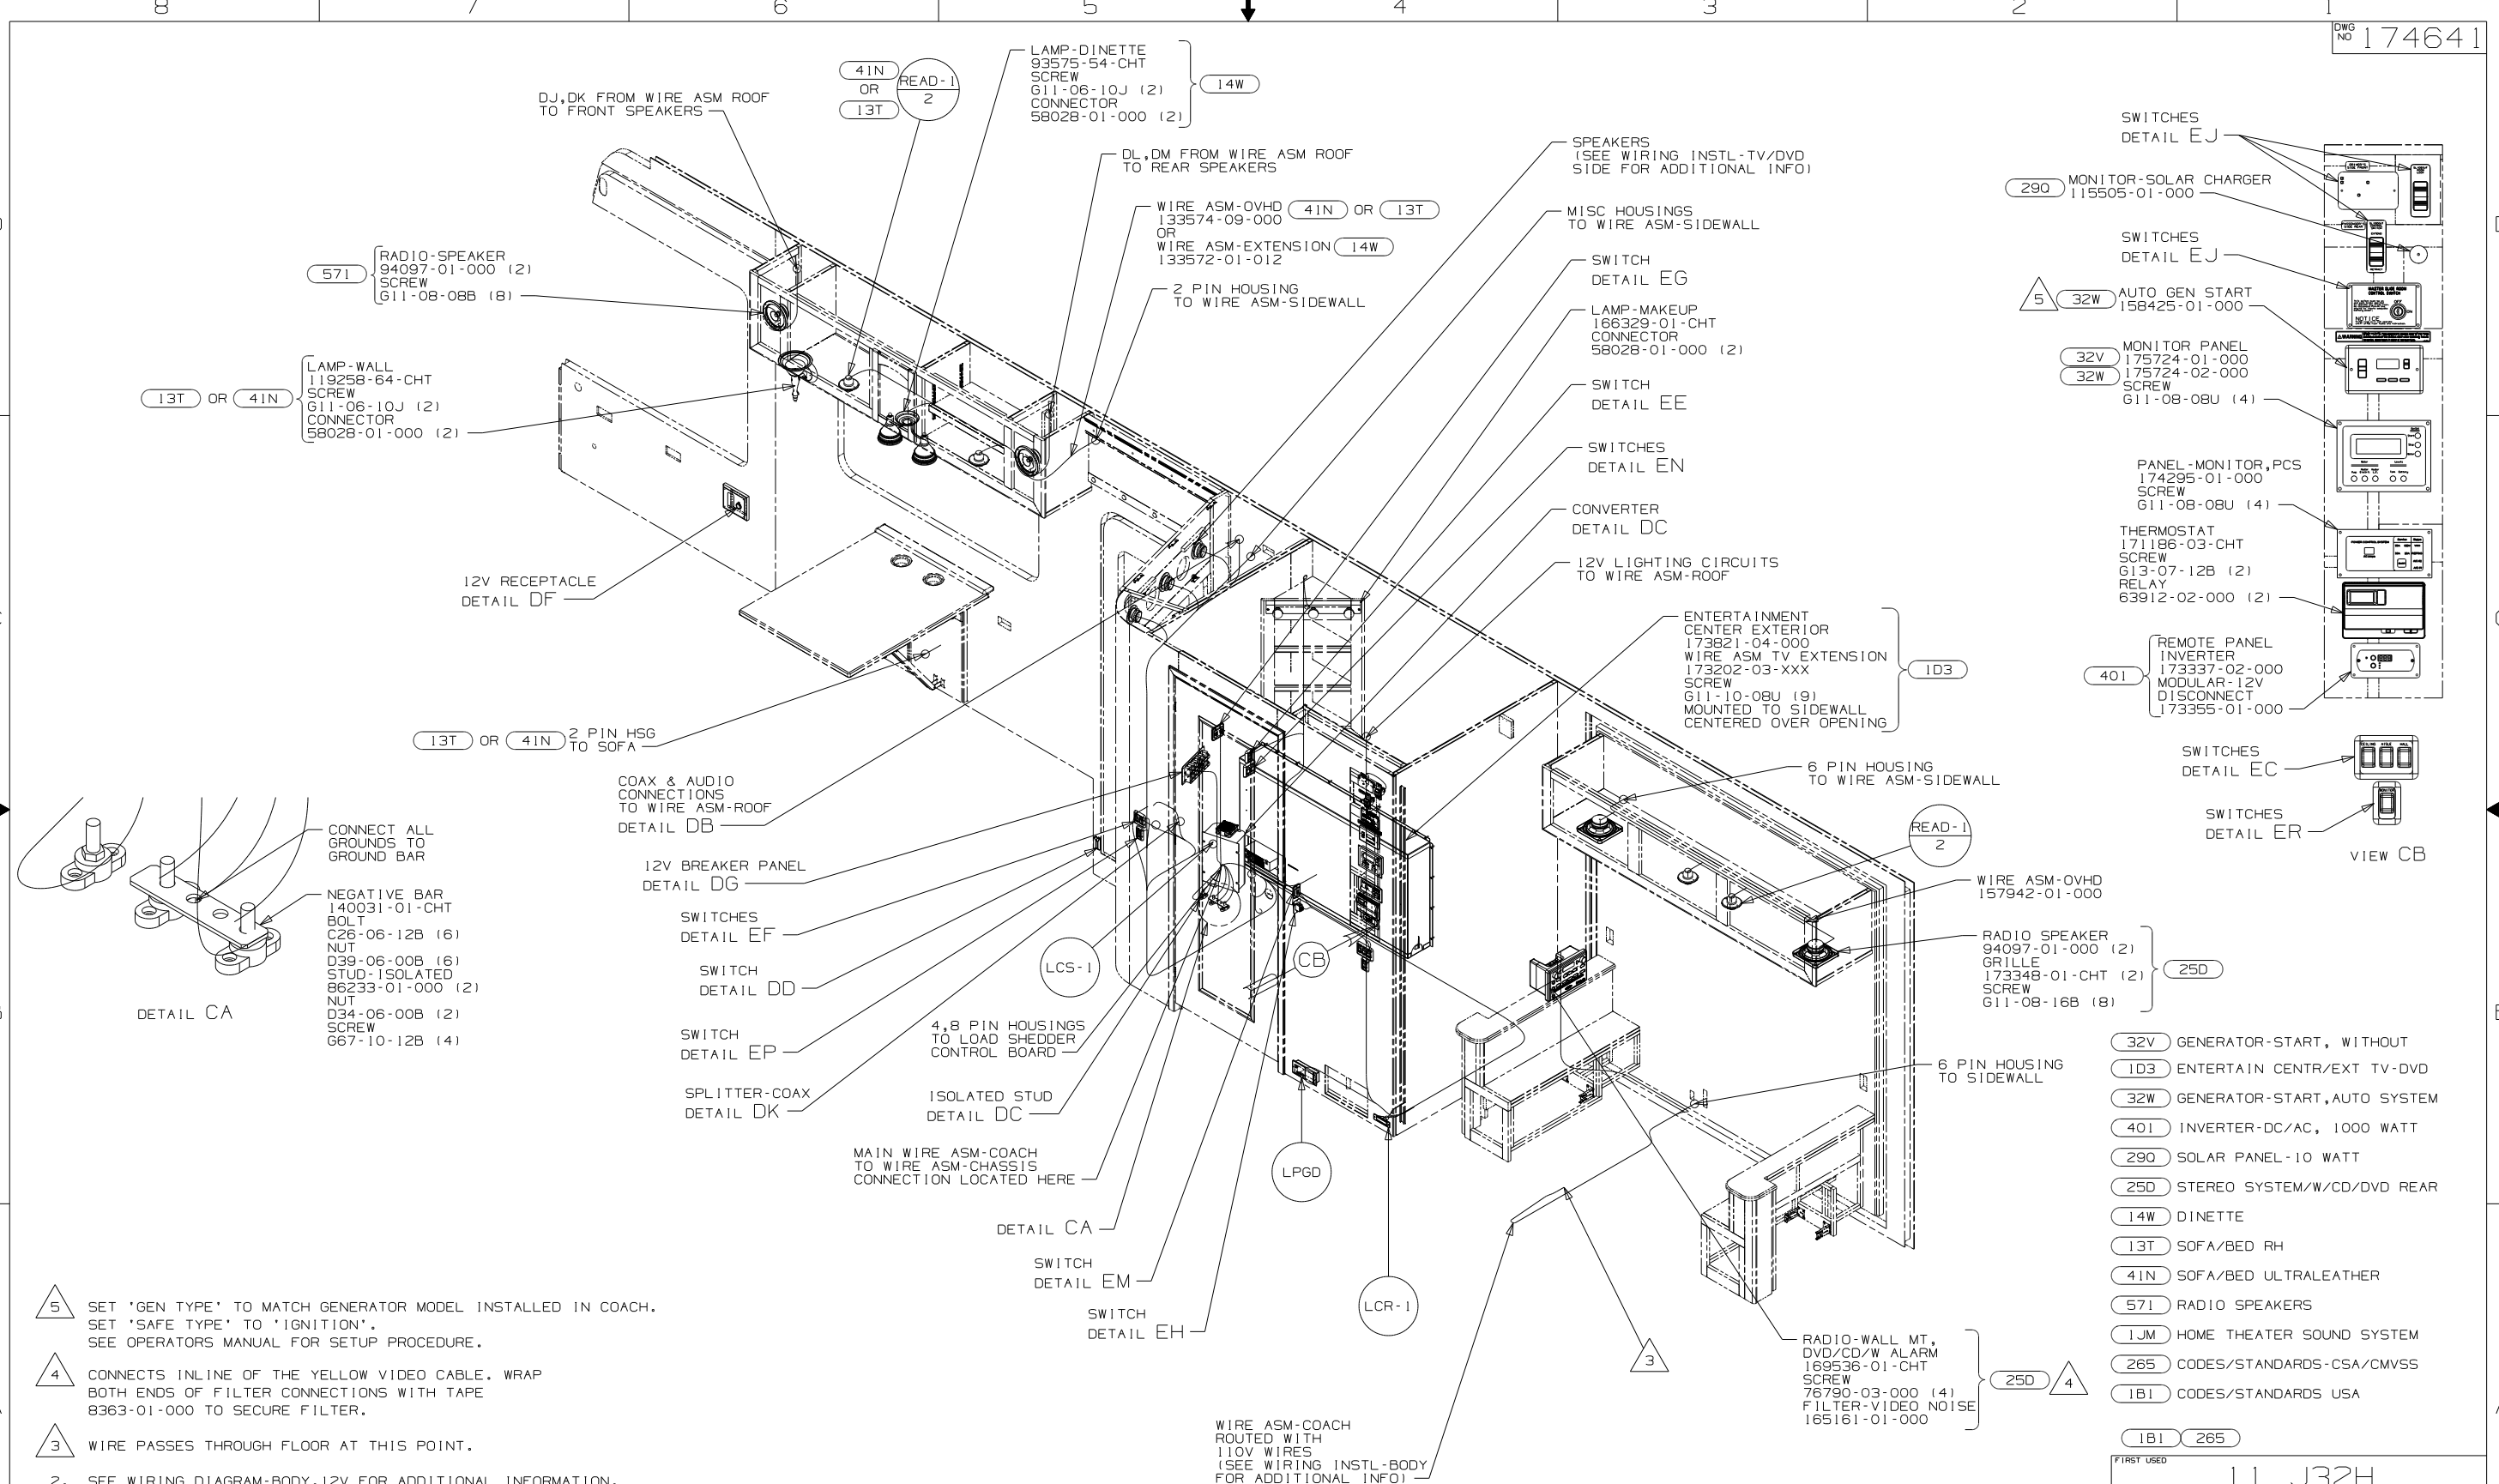


- 5 SET 'GEN TYPE' TO MATCH GENERATOR MODEL INSTALLED IN COACH.
SET 'SAFE TYPE' TO 'IGNITION'.
SEE OPERATORS MANUAL FOR SETUP PROCEDURE.
- 4 CONNECTS INLINE OF THE YELLOW VIDEO CABLE. WRAP
BOTH ENDS OF FILTER CONNECTIONS WITH TAPE
8363-01-000 TO SECURE FILTER.
- 3 WIRE PASSES THROUGH FLOOR AT THIS POINT.
2. SEE WIRING DIAGRAM-BODY,12V FOR ADDITIONAL INFORMATION.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000
OR WIRE TIE 8343-02-000 EVERY 600MM UNLESS OTHERWISE
SPECIFIED.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		11 J32H	
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-BODY, 12V			
SHEET 3	PART NO	174641	REV

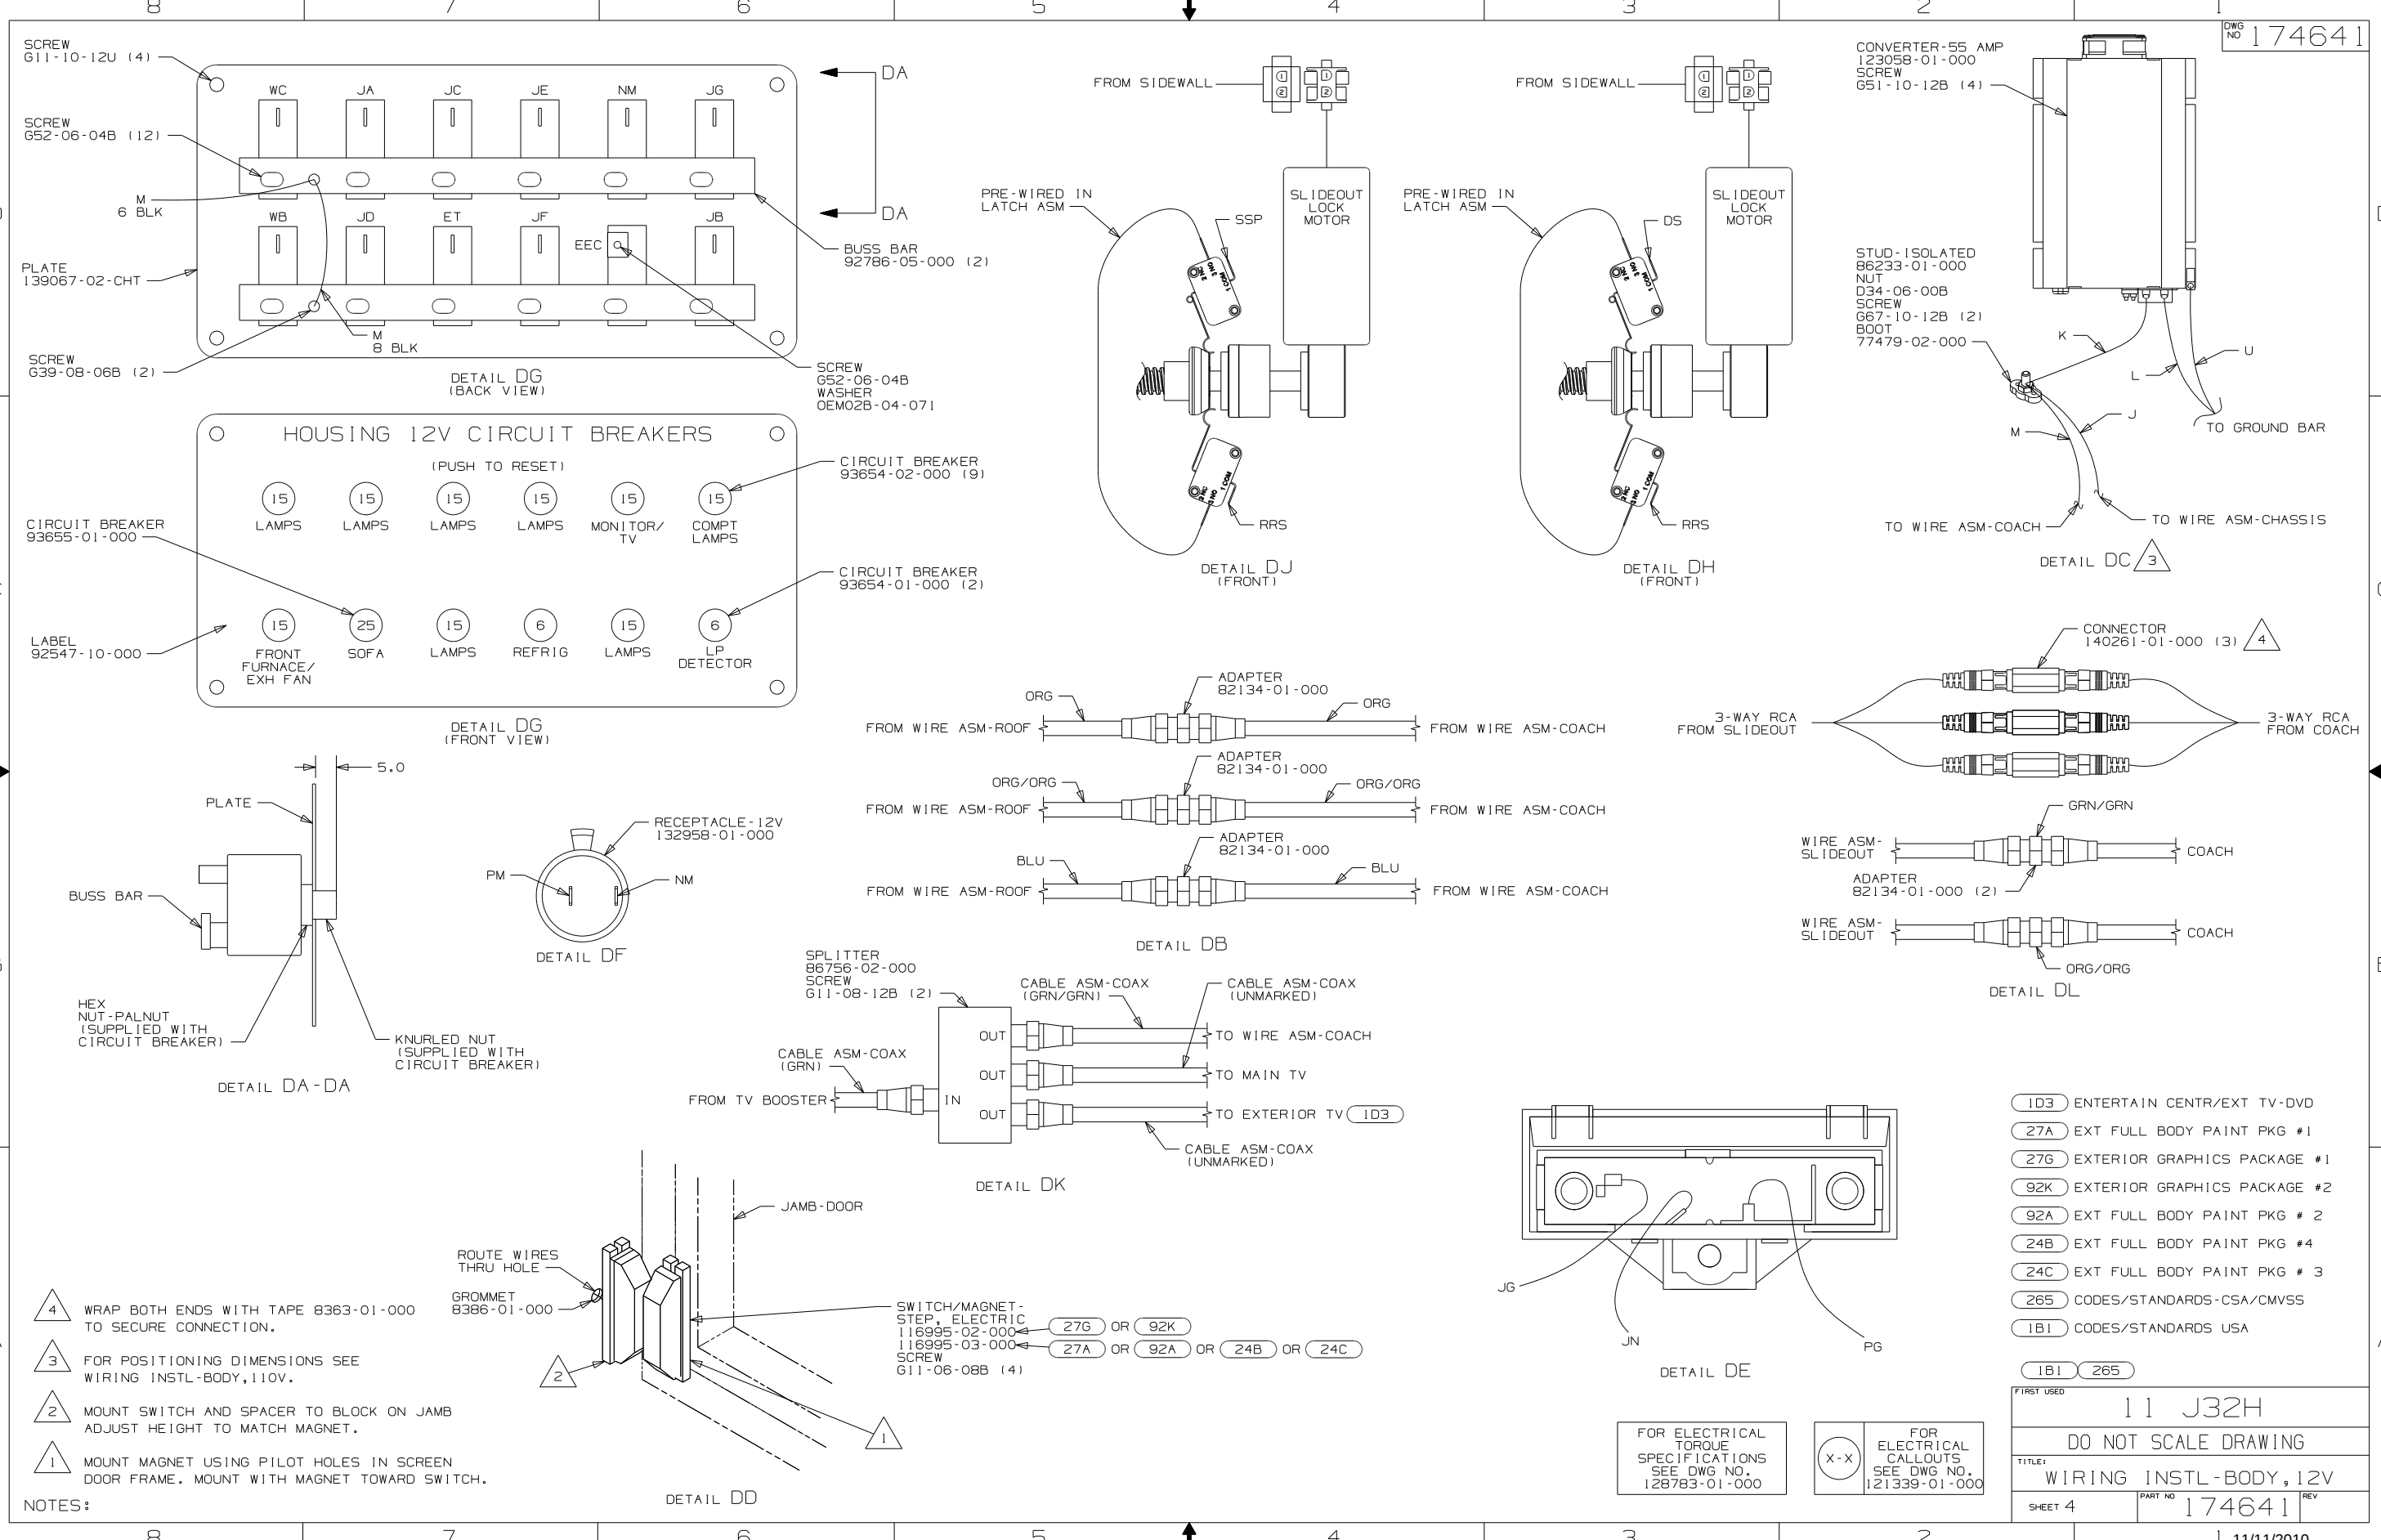

- NOTES:
- 4 WRAP BOTH ENDS WITH TAPE 8363-01-000 TO SECURE CONNECTION.
 - 3 FOR POSITIONING DIMENSIONS SEE WIRING INSTL-BODY, 110V.
 - 2 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB ADJUST HEIGHT TO MATCH MAGNET.
 - 1 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1D3 ENTERTAIN CENTR/EXT TV-DVD
- 27A EXT FULL BODY PAINT PKG #1
- 27G EXTERIOR GRAPHICS PACKAGE #1
- 92K EXTERIOR GRAPHICS PACKAGE #2
- 92A EXT FULL BODY PAINT PKG #2
- 24B EXT FULL BODY PAINT PKG #4
- 24C EXT FULL BODY PAINT PKG #3
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

181		265	
FIRST USED			
11 J32H			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-BODY, 12V			
SHEET 4		PART NO	174641
			REV

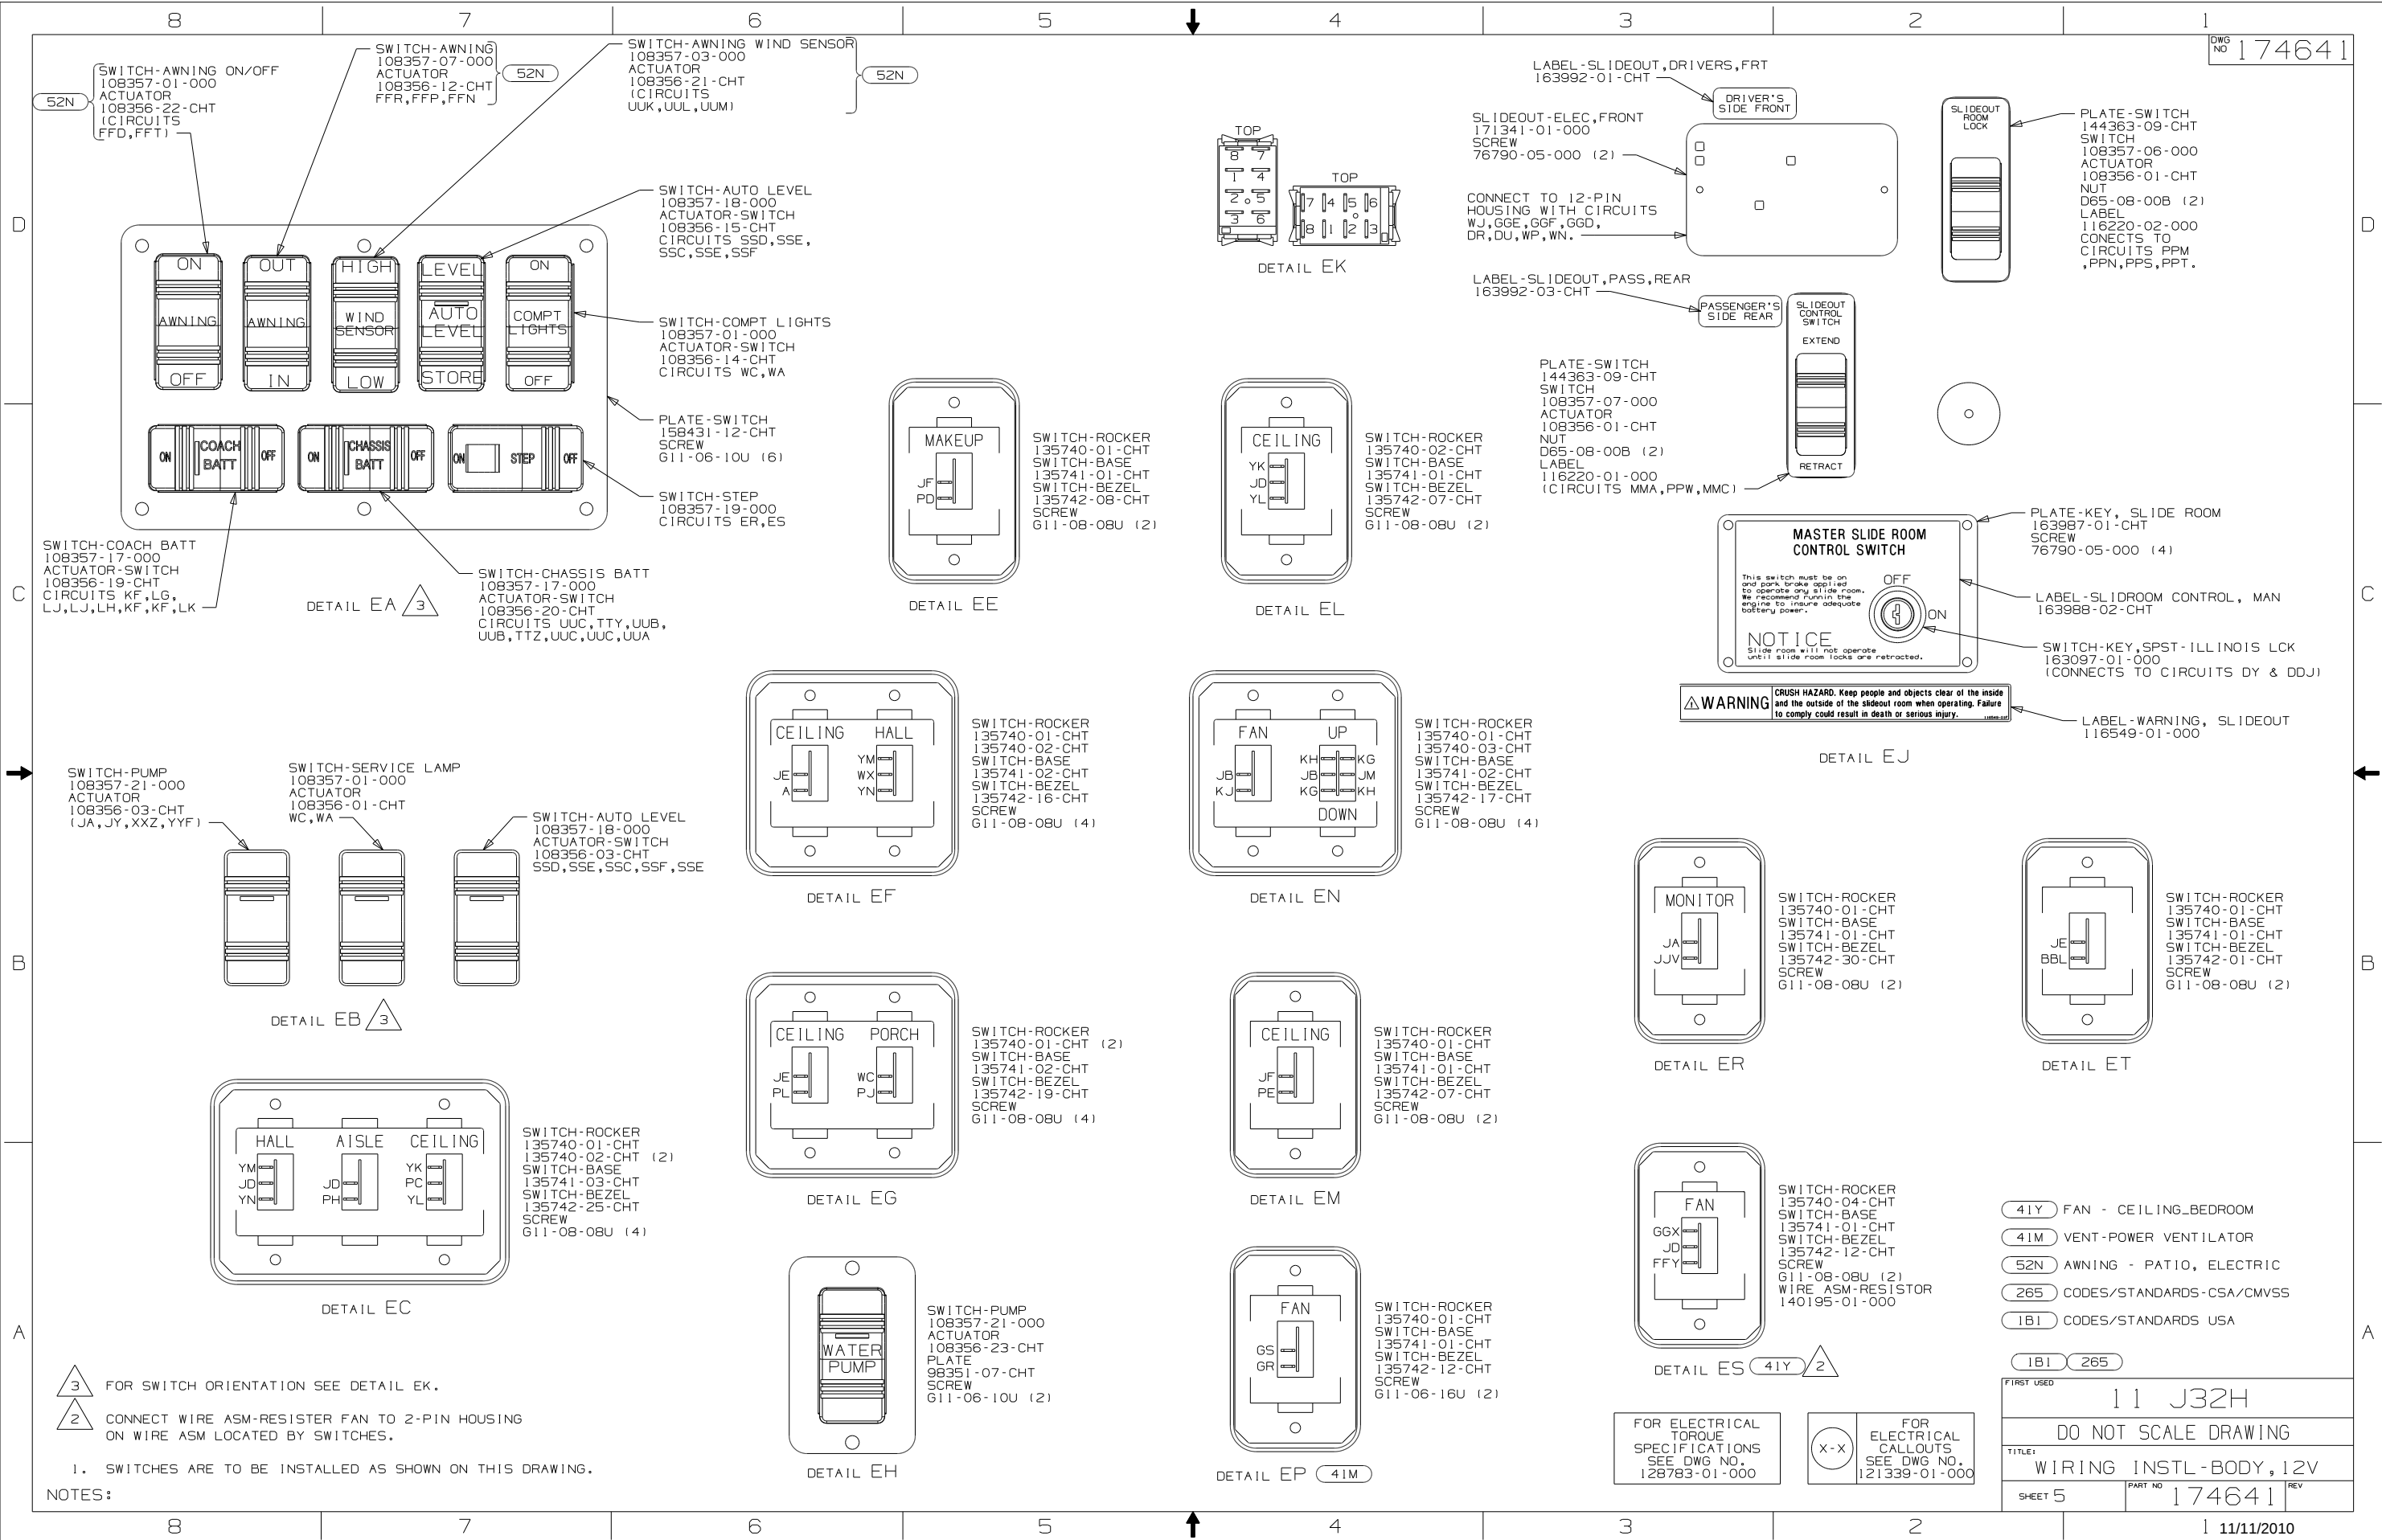

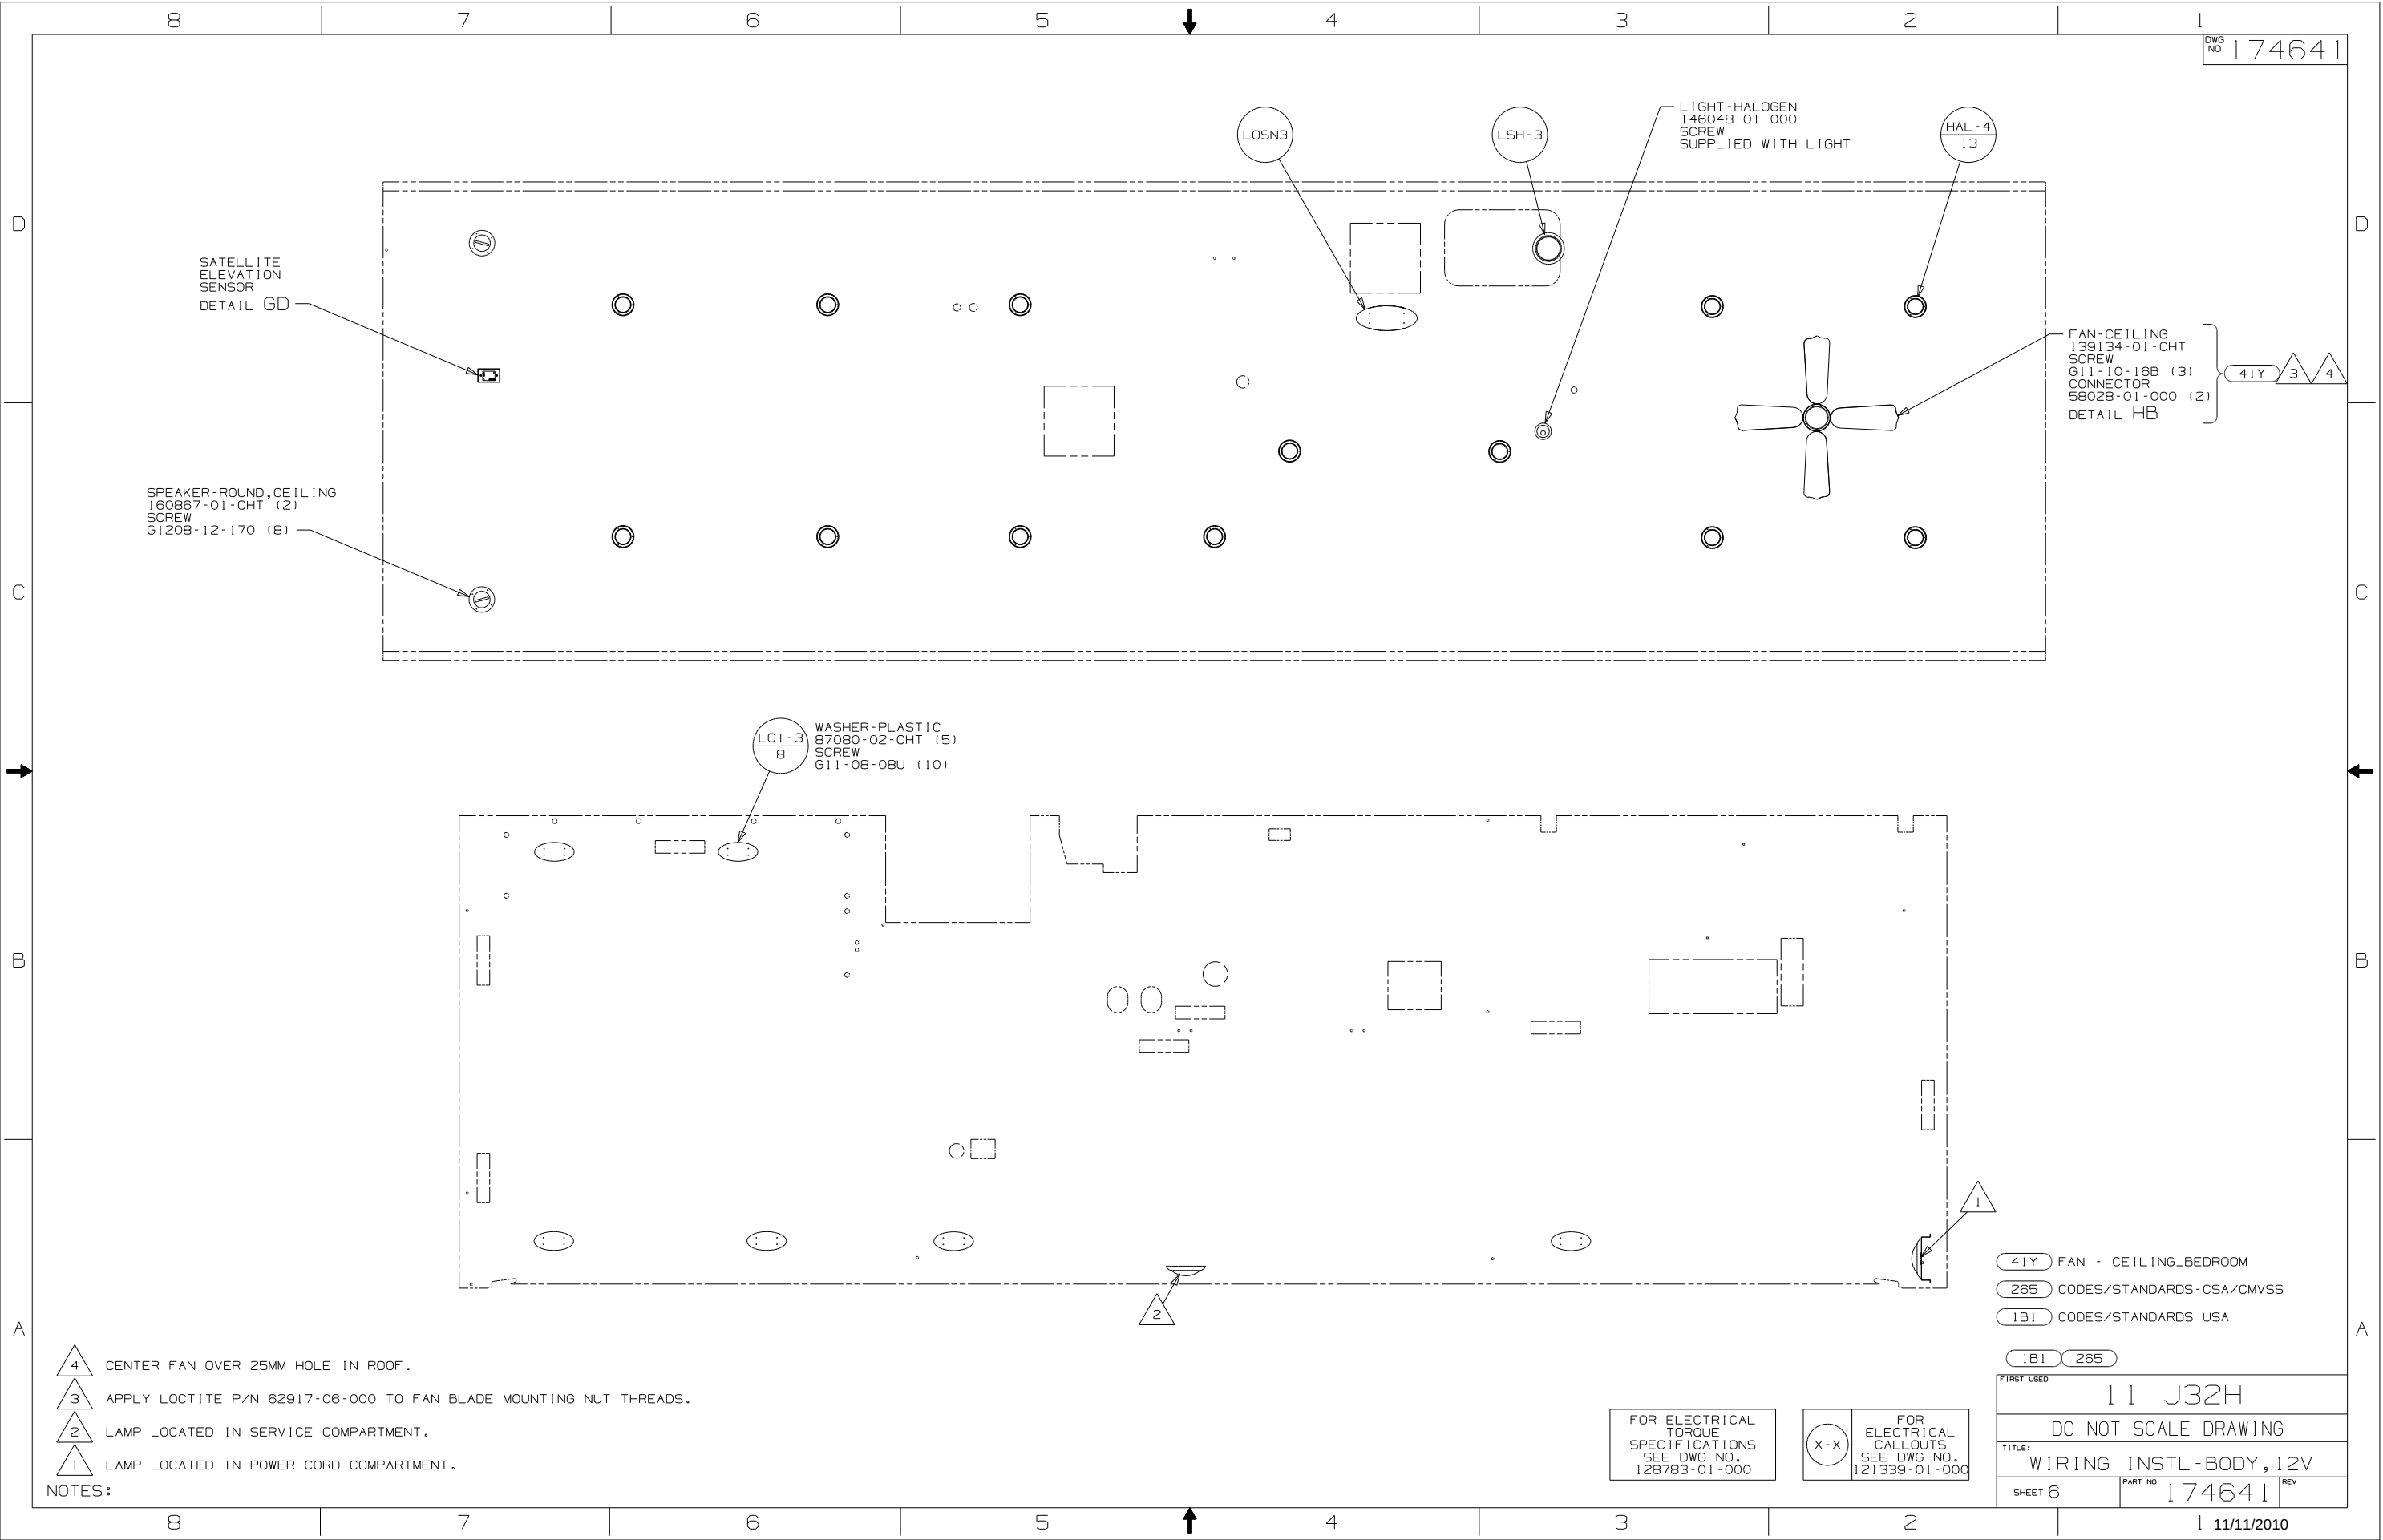







4	CENTER FAN OVER 25MM HOLE IN ROOF.
3	APPLY LOCTITE P/N 62917-06-000 TO FAN BLADE MOUNTING NUT THREADS.
2	LAMP LOCATED IN SERVICE COMPARTMENT.
1	LAMP LOCATED IN POWER CORD COMPARTMENT.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

41Y FAN - CEILING_BEDROOM
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

181		265	
FIRST USED			
11 J32H			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL - BODY, 12V			
SHEET 6		PART NO	REV
		174641	

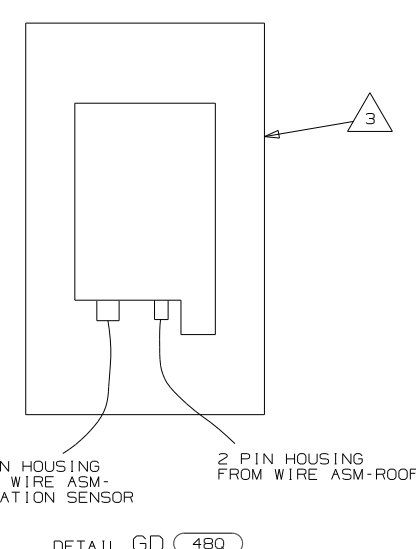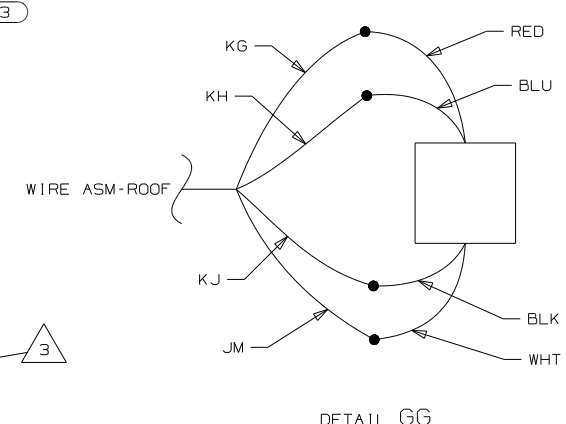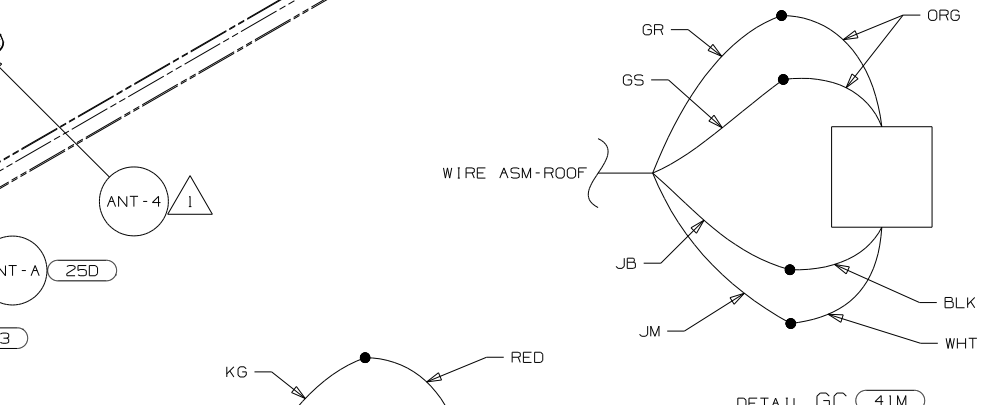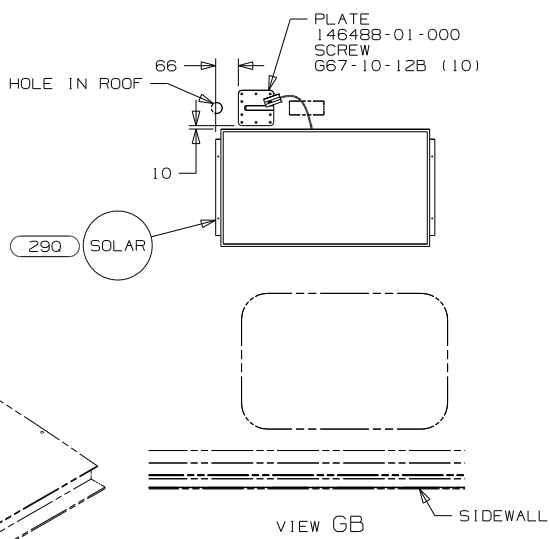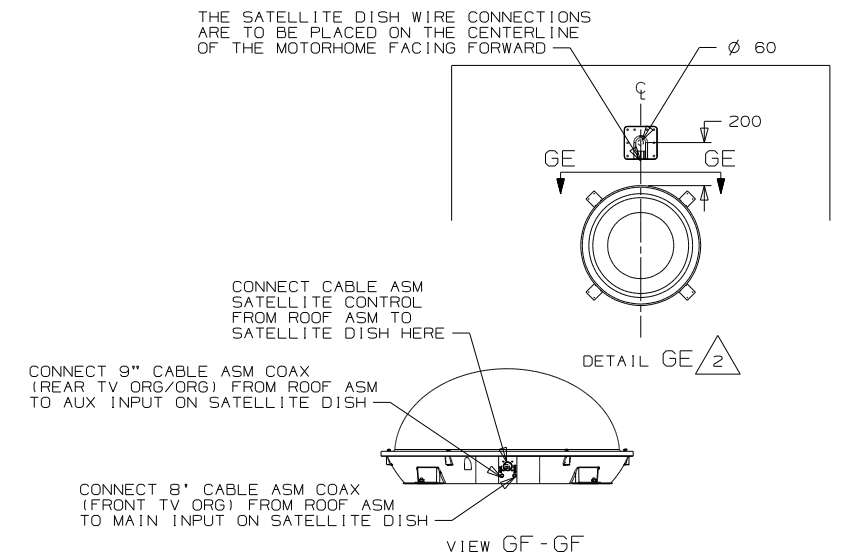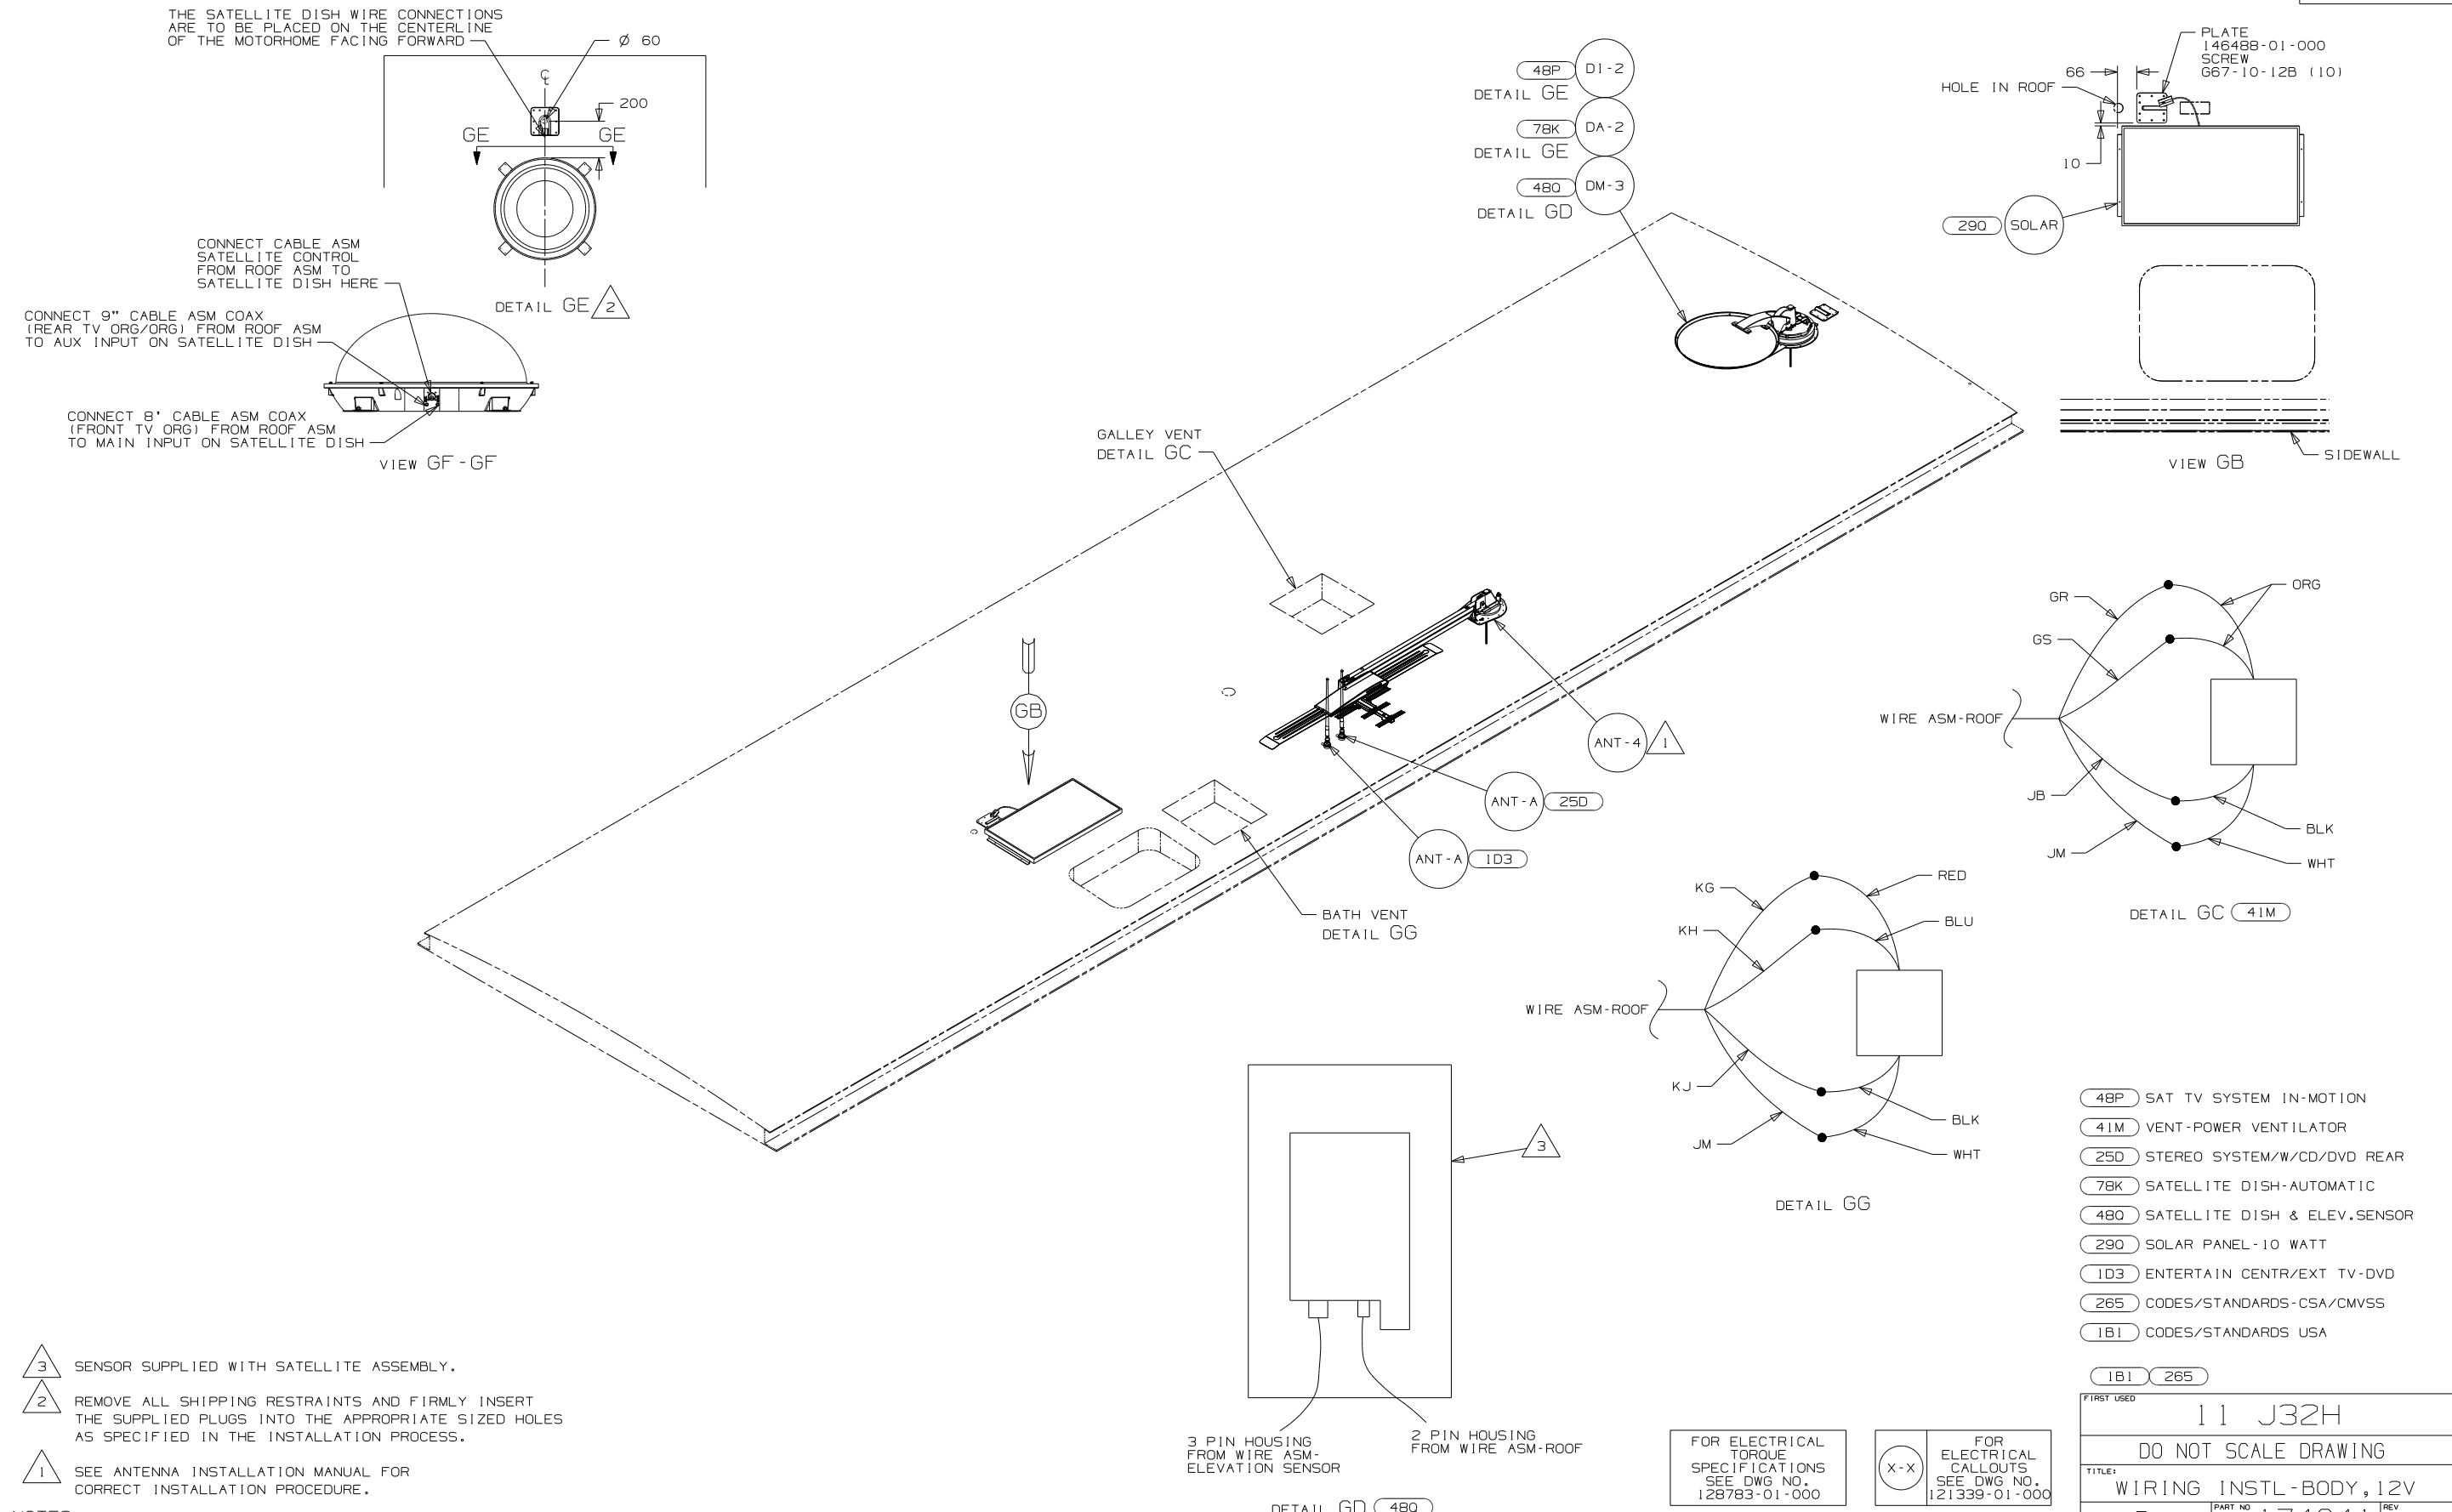

NOTES:

3 SENSOR SUPPLIED WITH SATELLITE ASSEMBLY.




2 REMOVE ALL SHIPPING RESTRAINTS AND FIRMLY INSERT THE SUPPLIED PLUGS INTO THE APPROPRIATE SIZED HOLES AS SPECIFIED IN THE INSTALLATION PROCESS.

1 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

48P	SAT TV SYSTEM IN-MOTION
41M	VENT-POWER VENTILATOR
25D	STEREO SYSTEM/W/CD/DVD REAR
78K	SATELLITE DISH-AUTOMATIC
48Q	SATELLITE DISH & ELEV.SENSOR
290	SOLAR PANEL-10 WATT
1D3	ENTERTAIN CENTR/EXT TV-DVD
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
181	265
FIRST USED 11 J32H	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY, 12V	
SHEET 7	PART NO 174641 REV

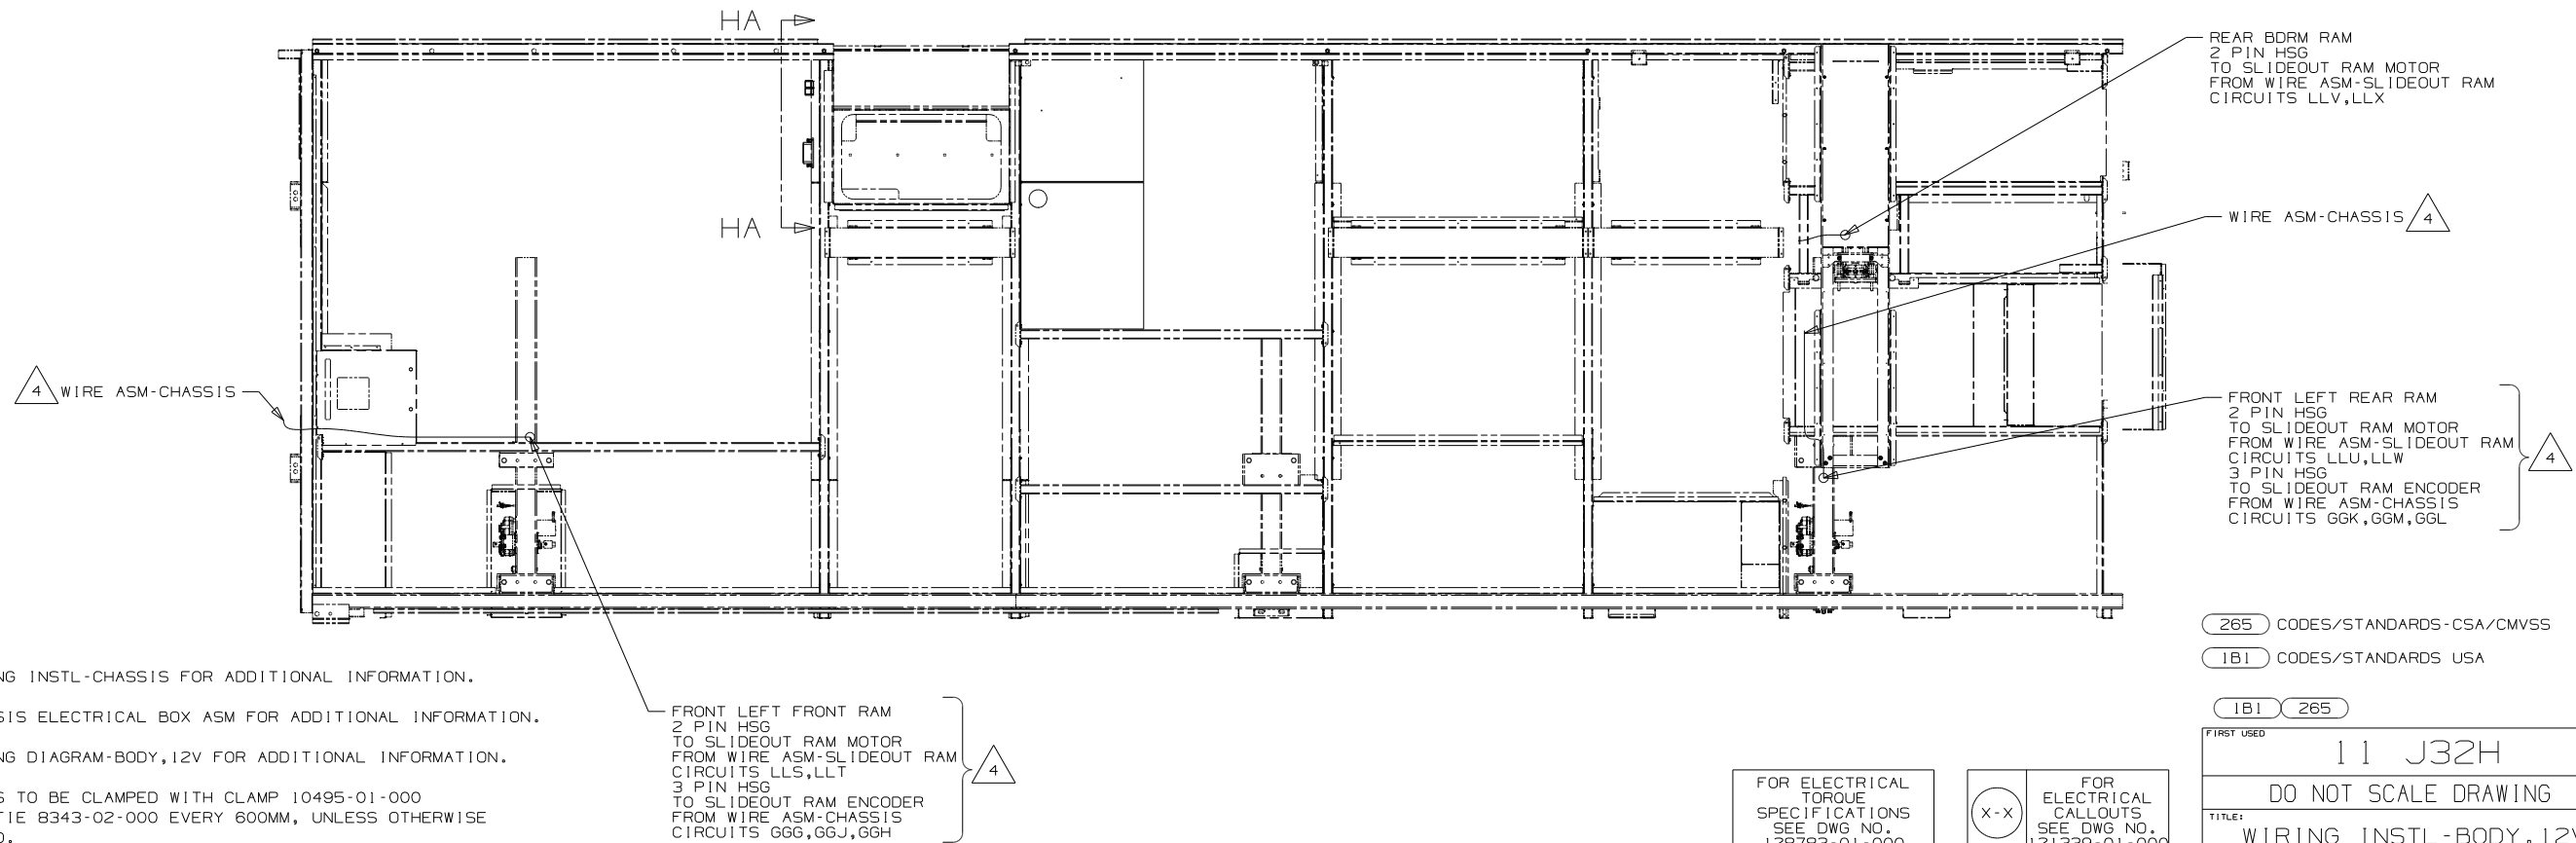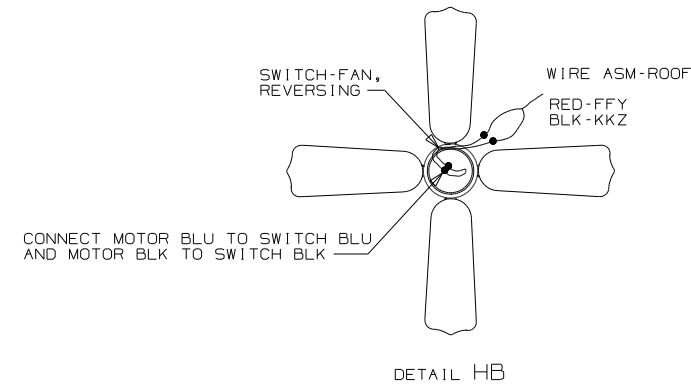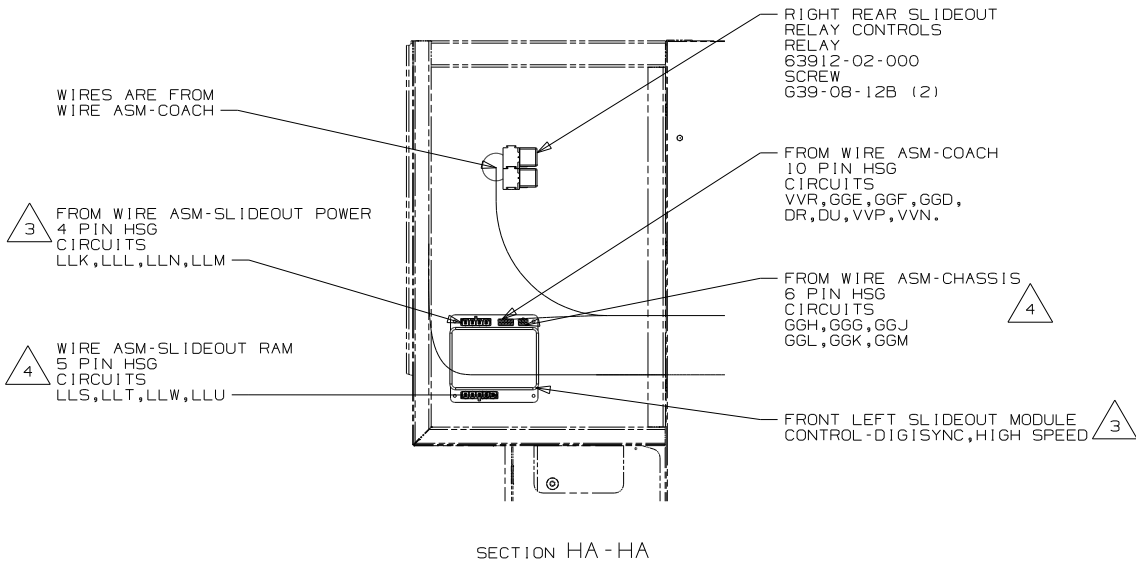

- 4 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 3 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
2. SEE WIRING DIAGRAM-BODY, 12V FOR ADDITIONAL INFORMATION.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR WIRE TIE 8343-02-000 EVERY 600MM, UNLESS OTHERWISE SPECIFIED.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		11 J32H
DO NOT SCALE DRAWING		
TITLE:		WIRING INSTL-BODY, 12V
SHEET 8	PART NO	174641
		REV