






DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

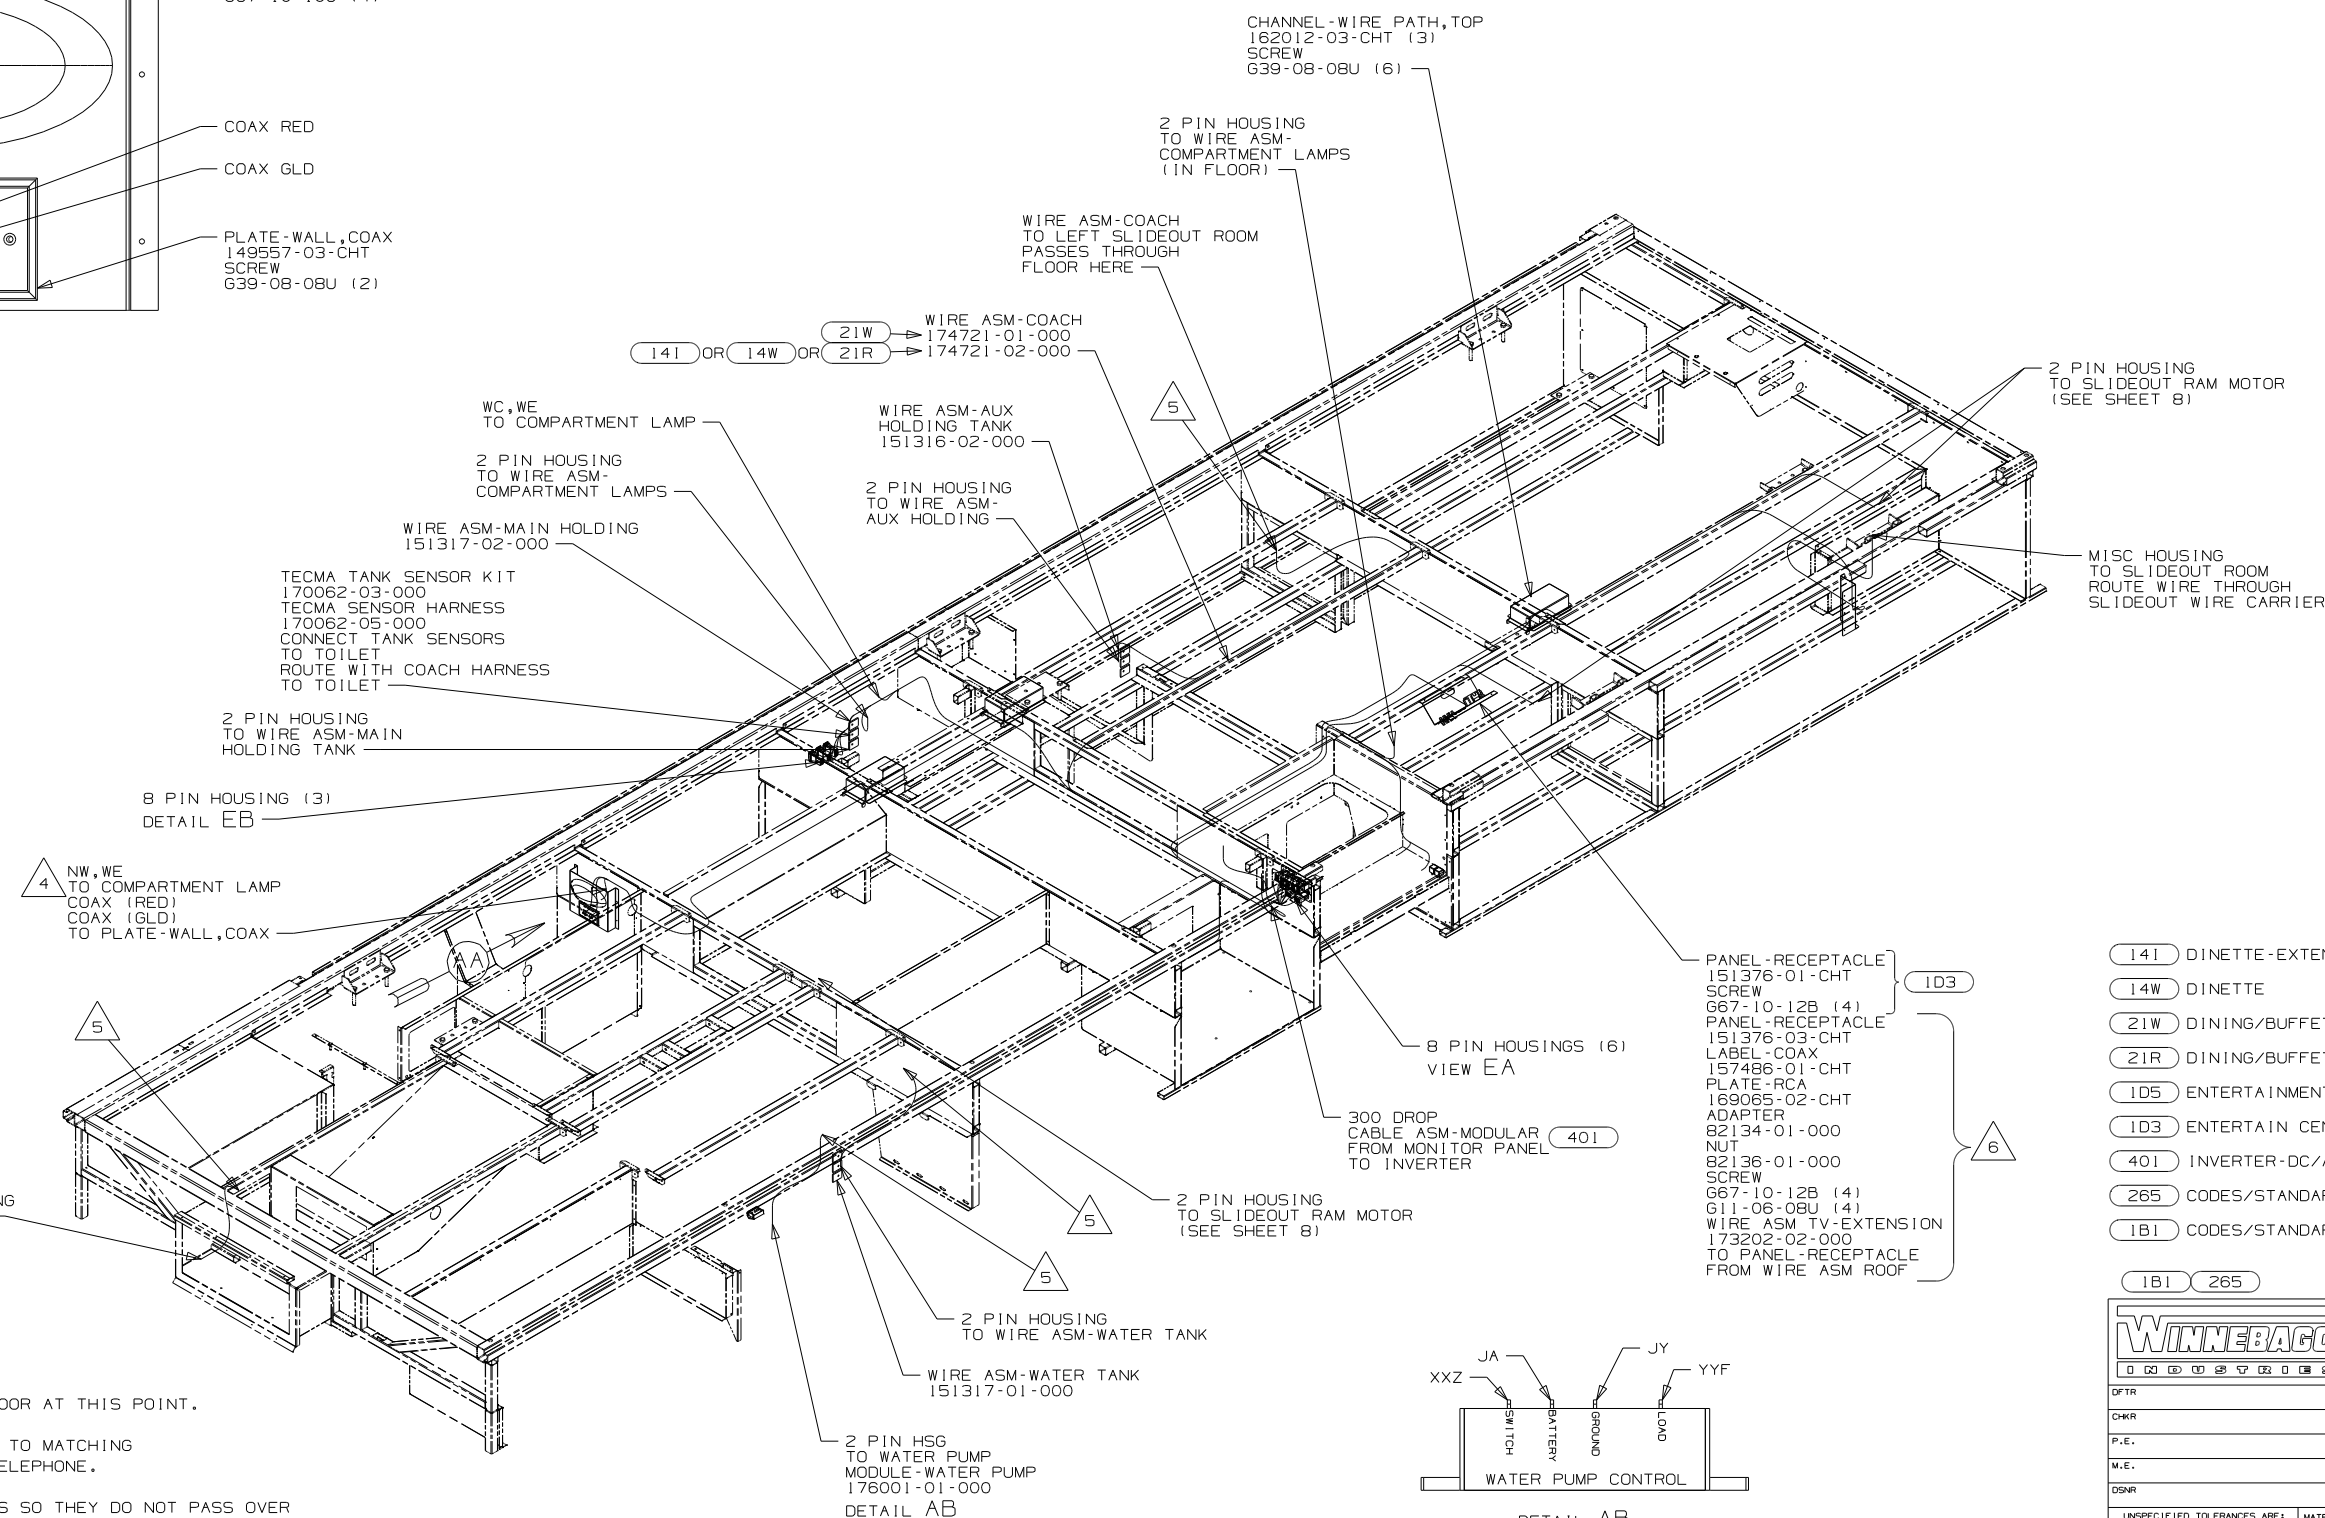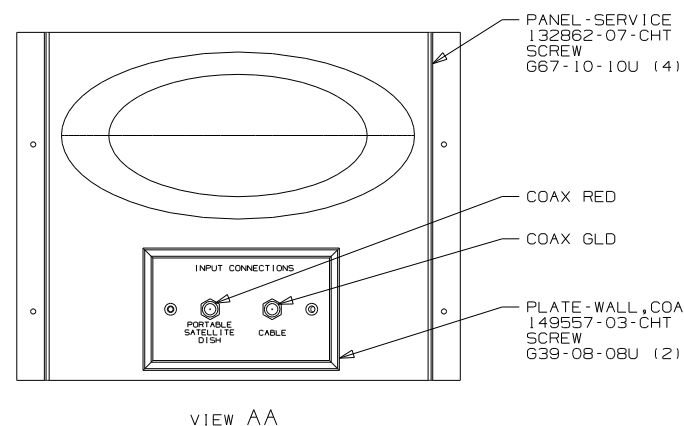

- | | |
|-----|------------------------------|
| 141 | DINETTE-EXTENDABLE TABLE/CH |
| 14W | DINETTE |
| 21W | DINING/BUFFET/TV |
| 21R | DINING/BUFFET/POWERED TV |
| 1D5 | ENTERTAINMENT CENTR/EXT W/CD |
| 1D3 | ENTERTAIN CENTR/EXT TV-DVD |
| 401 | INVERTER-DC/AC, 1000 WATT |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |
| 1B1 | 265 |



		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFT# _____		ORIG. DATE _____	
CHK# _____		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E. _____		FIRST USED _____	
W.E. _____		11 J37F	
DSN# _____		MATERIAL: _____	
UNPRESSED TOLERANCES ARE:		THIRD ANGLE PROJECTION	
WHOLE DIM (X) ± 3			
ONE-PLACE (X, X) ± 1.5			
TWO-PLACE (X, XX) ± 0.50			
ANGLE ± 1°			
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-BODY, 12V			
SHEET 1 OF 8		PART NO 174714	
		REV _____	

3. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASS OVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIME WITH PRIMER 94.
2. SEE WIRING DIAGRAM-BODY, 12V FOR ADDITIONAL INFORMATION.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR WIRE TIE 8343-02-000 EVERY 600MM UNLESS OTHERWISE SPECIFIED.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 12-339-01-00
---	--

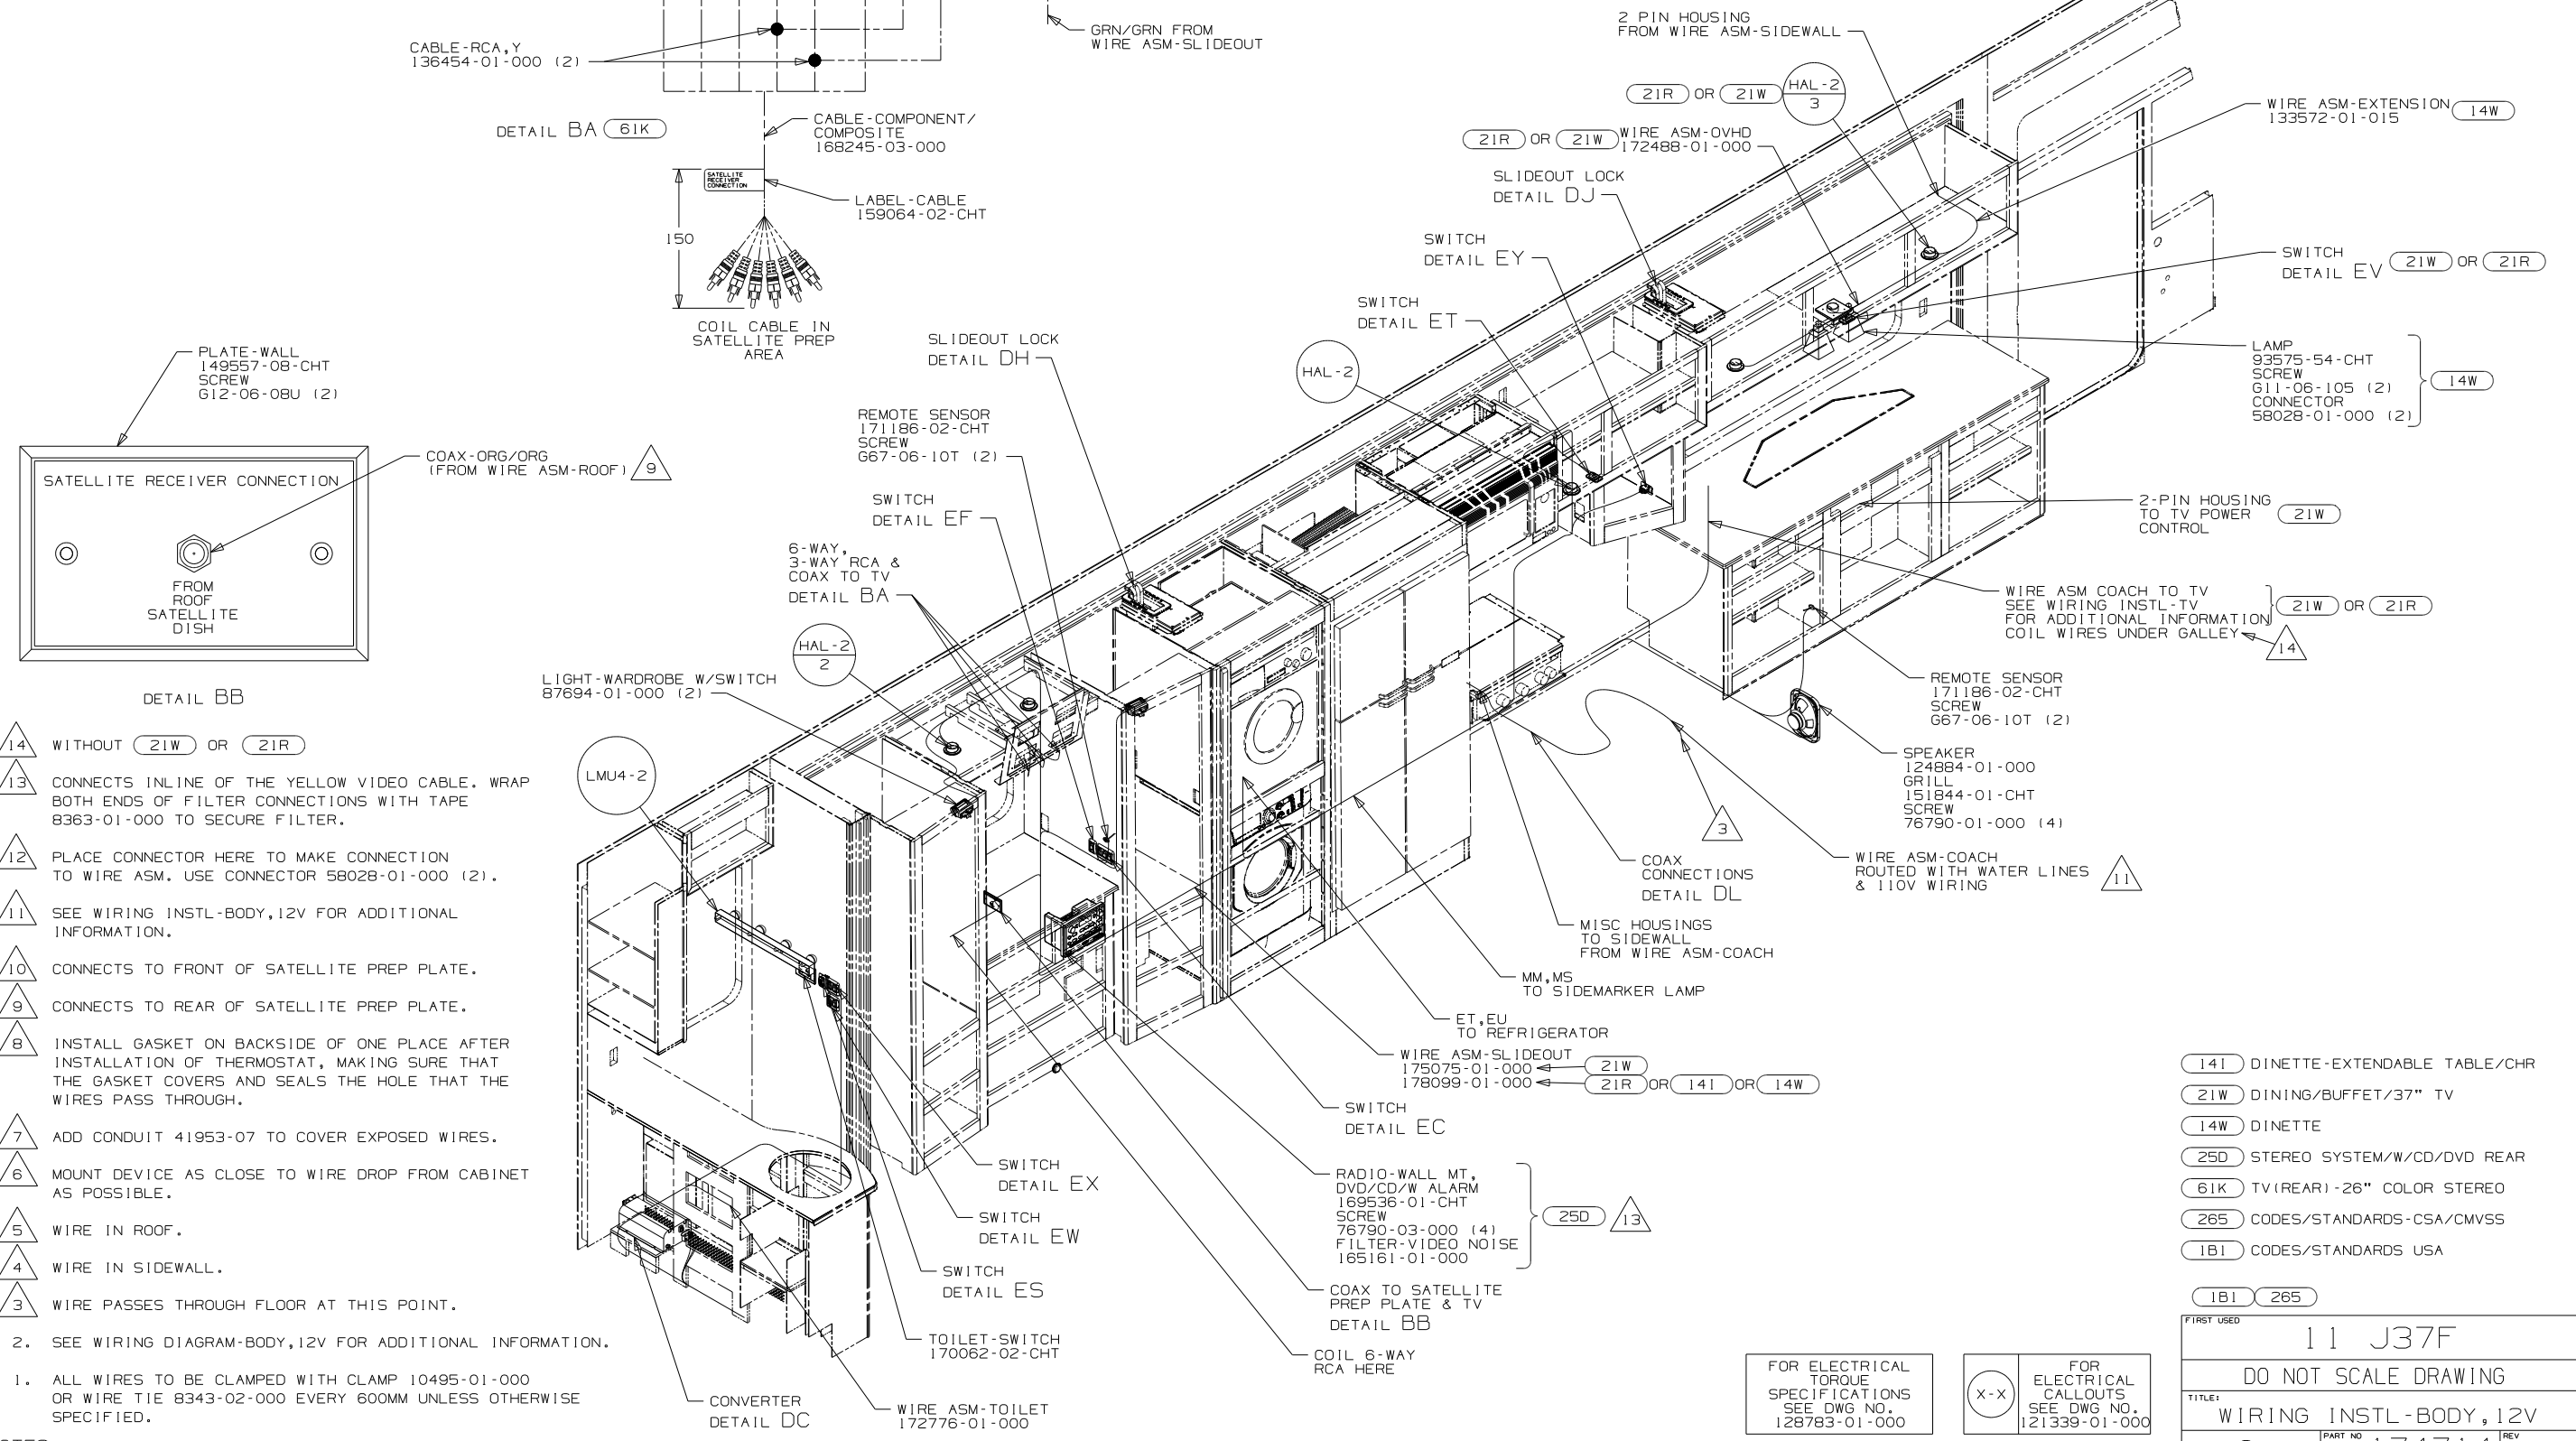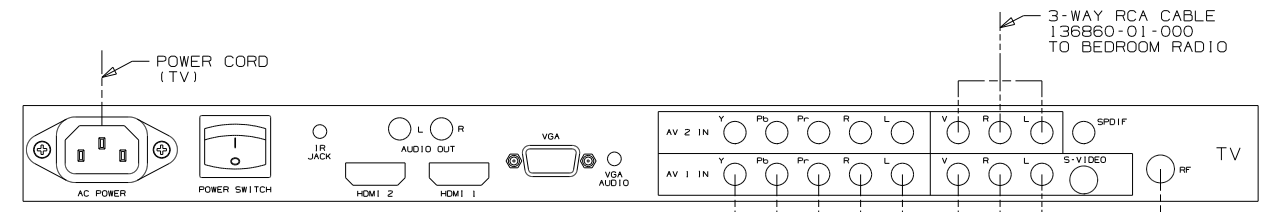


- NOTES:
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR WIRE TIE 8343-02-000 EVERY 600MM UNLESS OTHERWISE SPECIFIED.
 2. SEE WIRING DIAGRAM-BODY, 12V FOR ADDITIONAL INFORMATION.
- 14 WITHOUT 21W OR 21R
- 13 CONNECTS INLINE OF THE YELLOW VIDEO CABLE. WRAP BOTH ENDS OF FILTER CONNECTIONS WITH TAPE 8363-01-000 TO SECURE FILTER.
- 12 PLACE CONNECTOR HERE TO MAKE CONNECTION TO WIRE ASM. USE CONNECTOR 58028-01-000 (2).
- 11 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 10 CONNECTS TO FRONT OF SATELLITE PREP PLATE.
- 9 CONNECTS TO REAR OF SATELLITE PREP PLATE.
- 8 INSTALL GASKET ON BACKSIDE OF ONE PLACE AFTER INSTALLATION OF THERMOSTAT, MAKING SURE THAT THE GASKET COVERS AND SEALS THE HOLE THAT THE WIRES PASS THROUGH.
- 7 ADD CONDUIT 41953-07 TO COVER EXPOSED WIRES.
- 6 MOUNT DEVICE AS CLOSE TO WIRE DROP FROM CABINET AS POSSIBLE.
- 5 WIRE IN ROOF.
- 4 WIRE IN SIDEWALL.
- 3 WIRE PASSES THROUGH FLOOR AT THIS POINT.




FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000










- 141 DINETTE-EXTENDABLE TABLE/CHR
- 21W DINING/BUFFET/37" TV
- 14W DINETTE
- 25D STEREO SYSTEM/W/CD/DVD REAR
- 61K TV(REAR)-26" COLOR STEREO
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED	11 J37F
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY, 12V	
SHEET 2	PART NO 174714
REV	

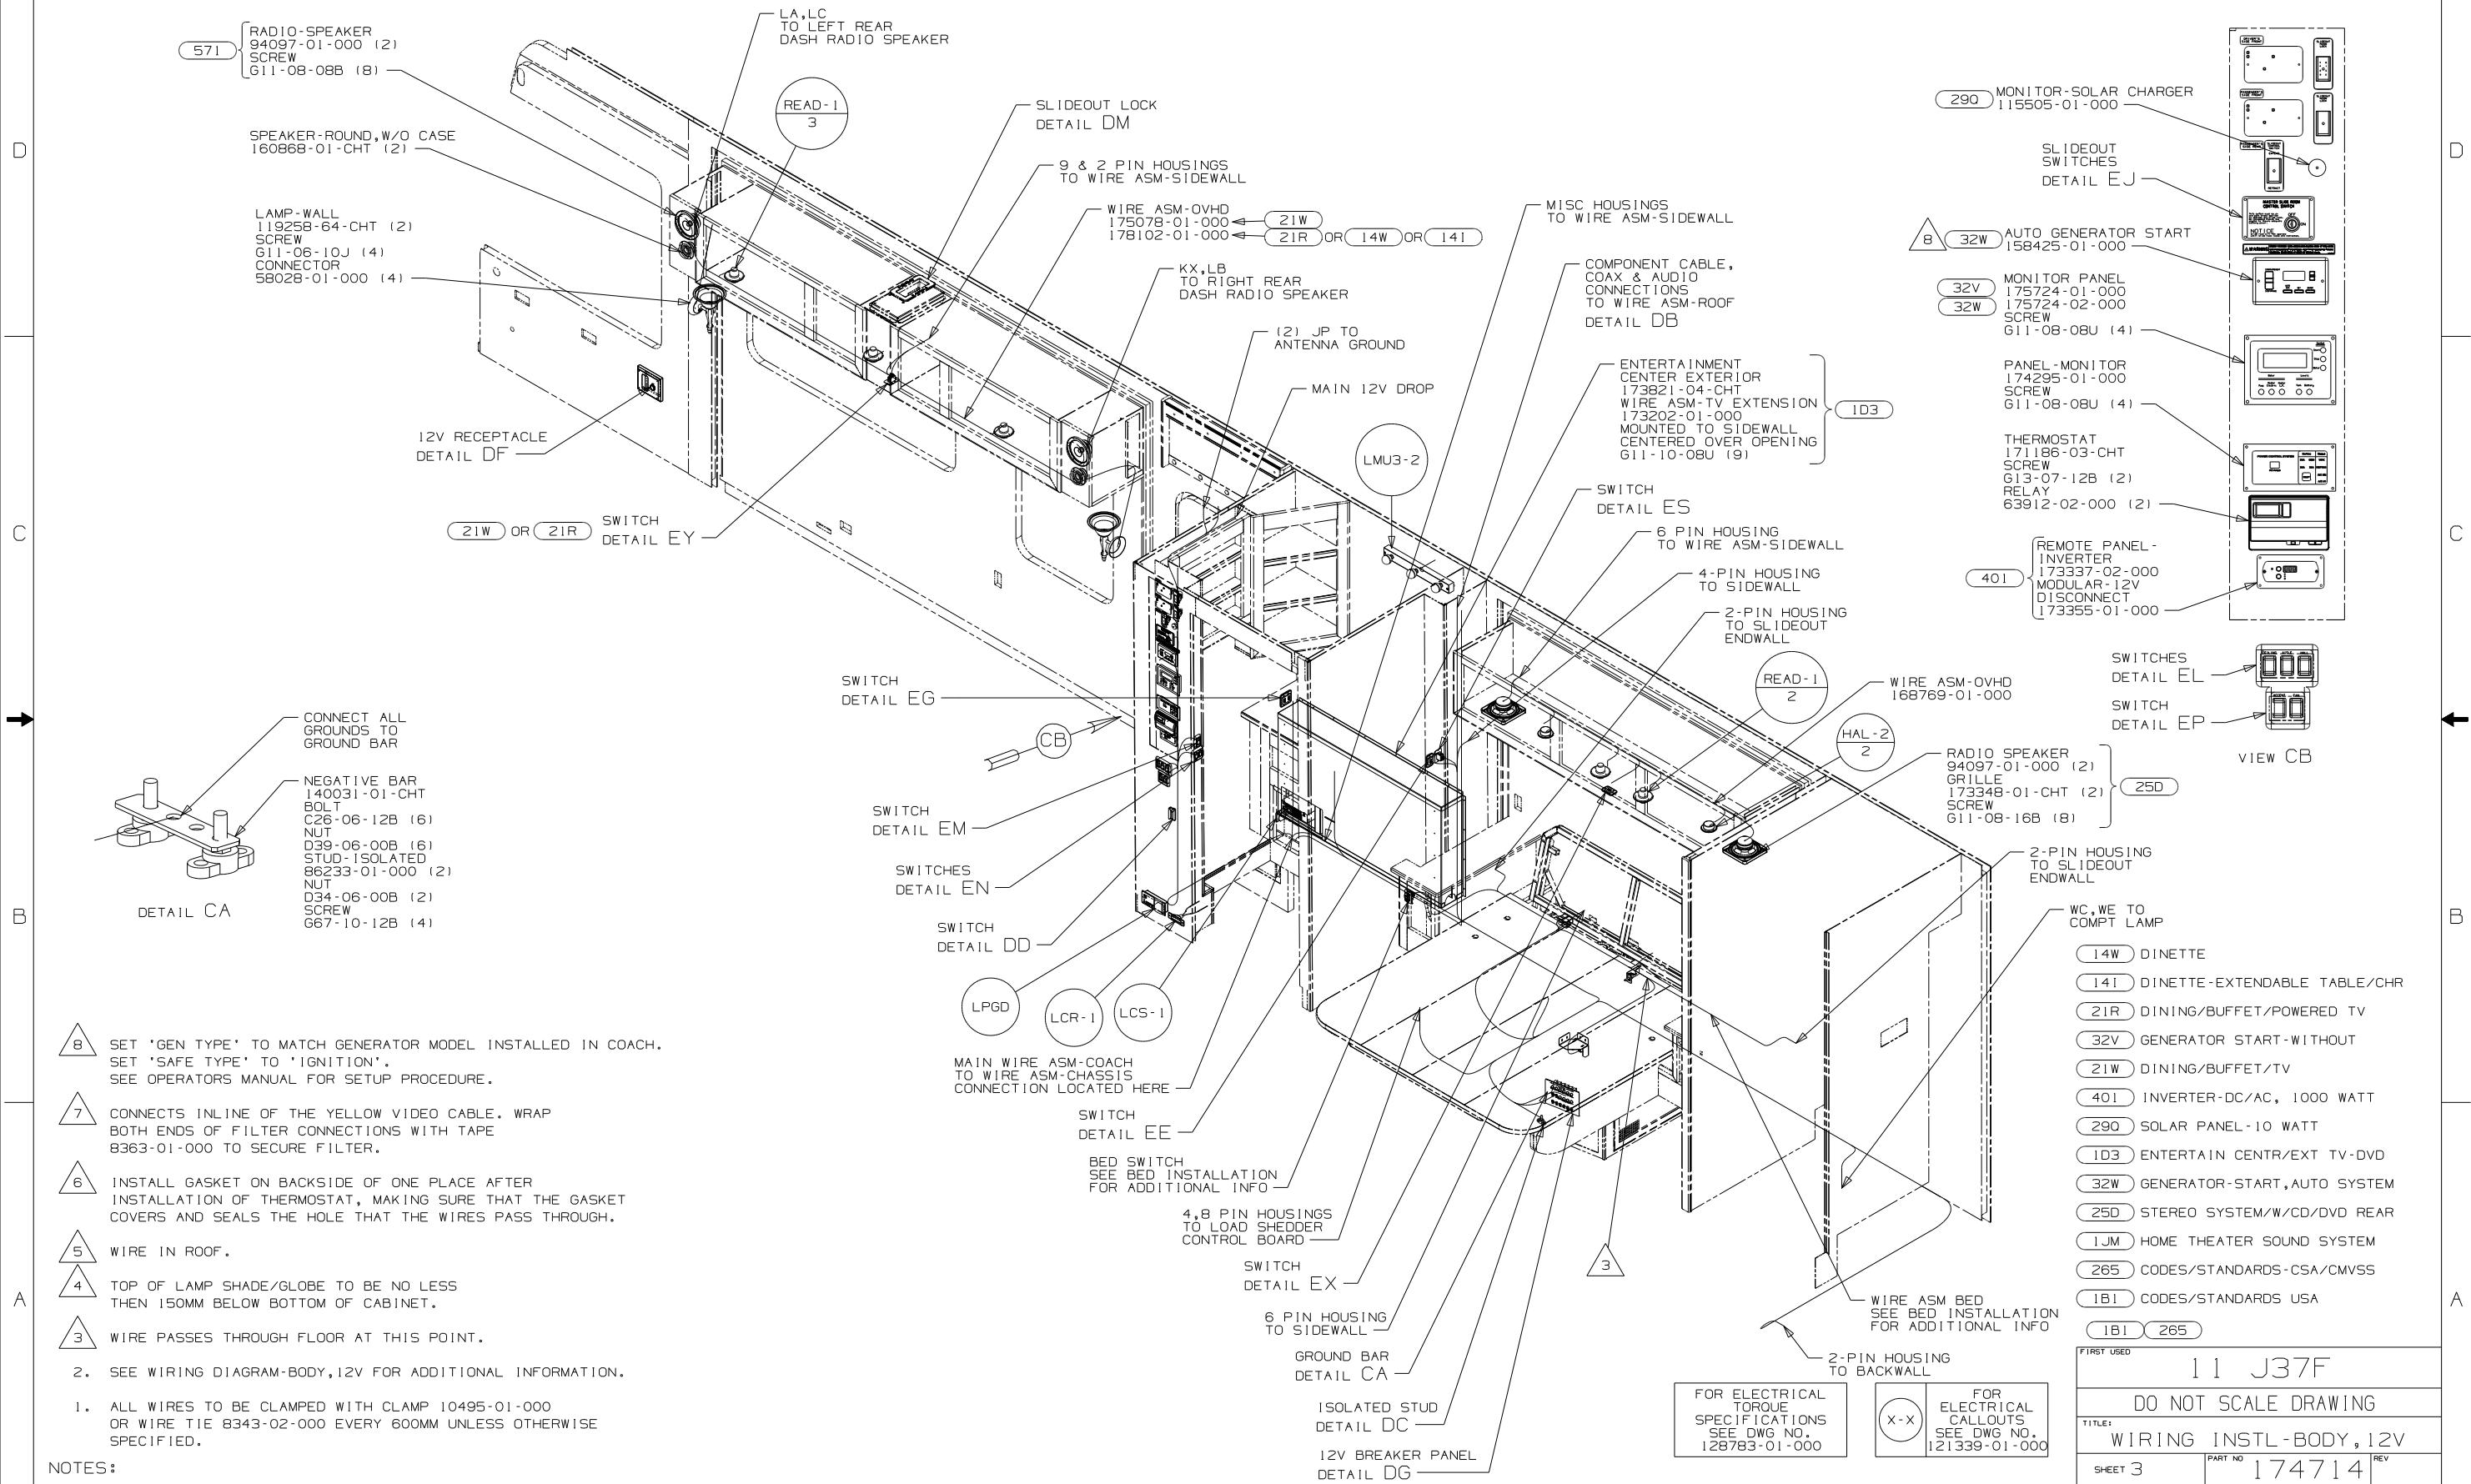

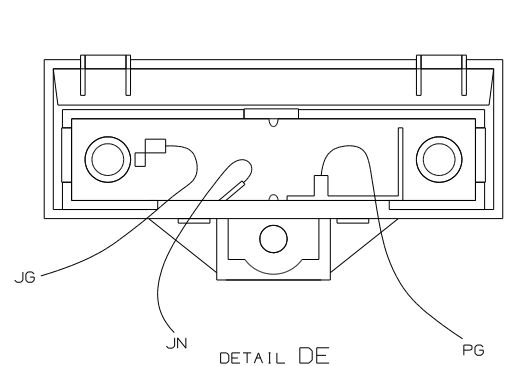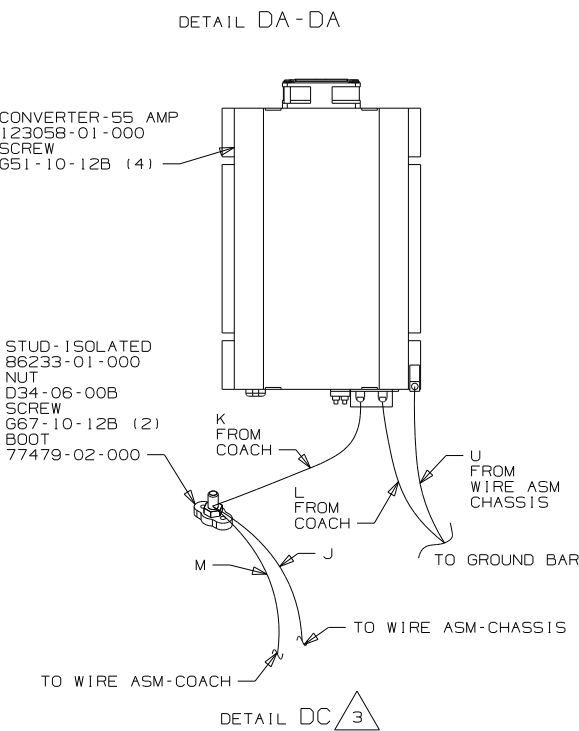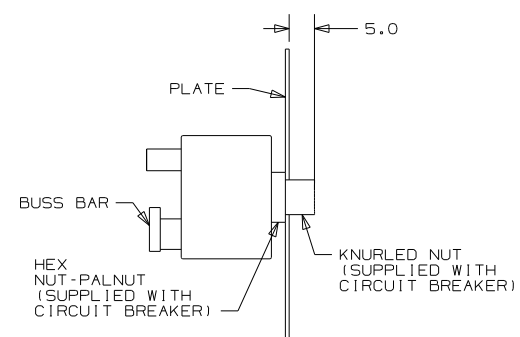


- NOTES:
- 5 CIRCUIT IS MARKED WITH YELLOW TAPE.
 - 4 WRAP BOTH ENDS WITH TAPE 8363-01-000 TO SECURE CONNECTION.
 - 3 FOR POSITIONING DIMENSIONS SEE WIRING INSTL-BODY, 110V.
 - 2 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB ADJUST HEIGHT TO MATCH MAGNET.
 - 1 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

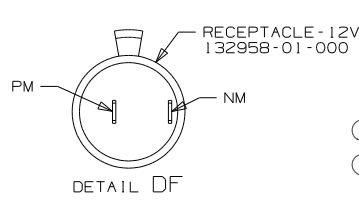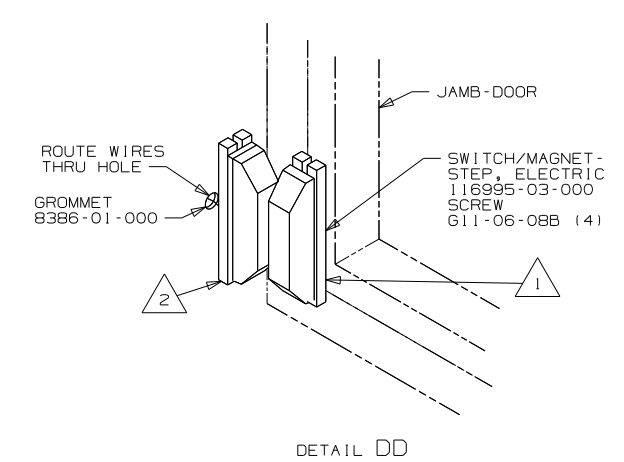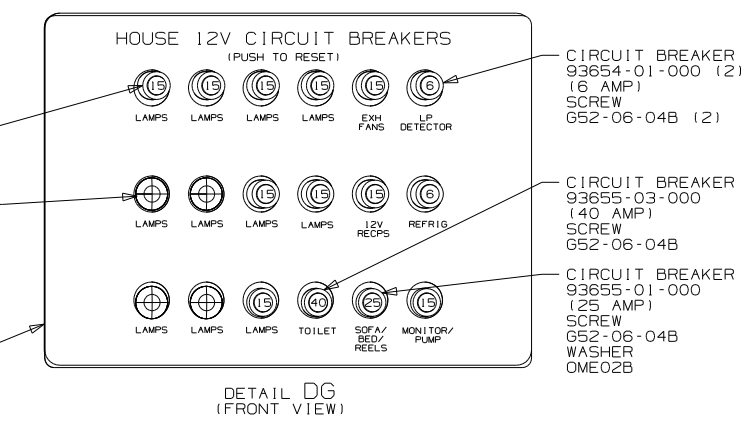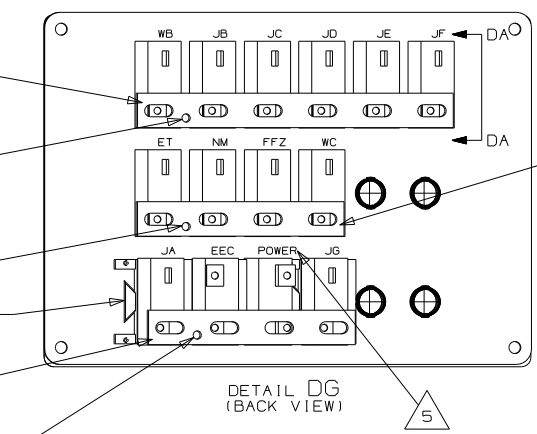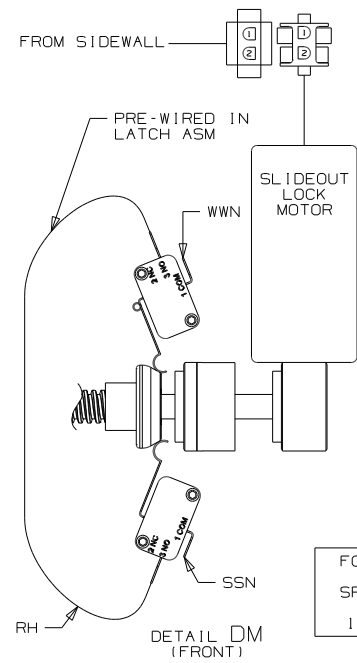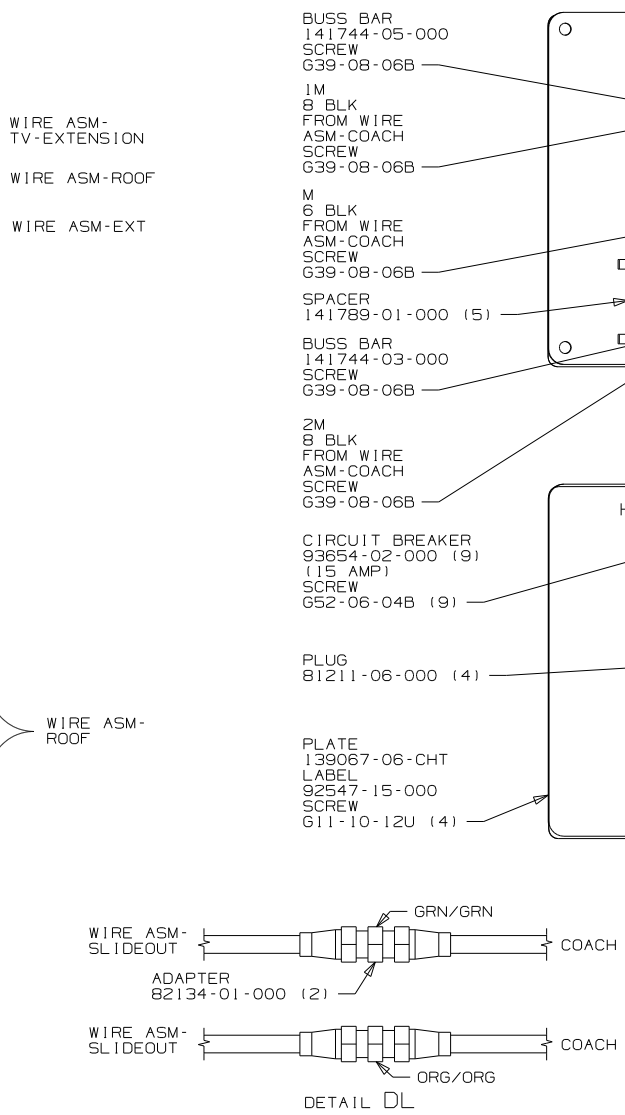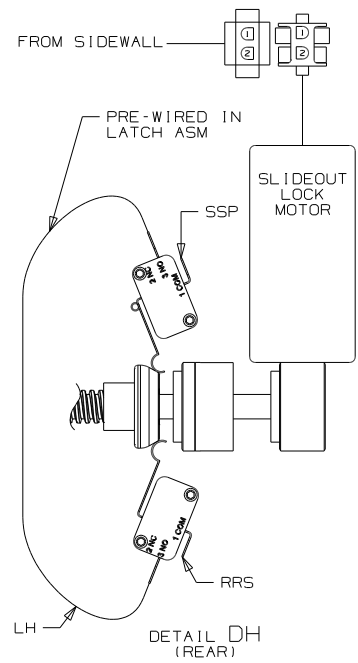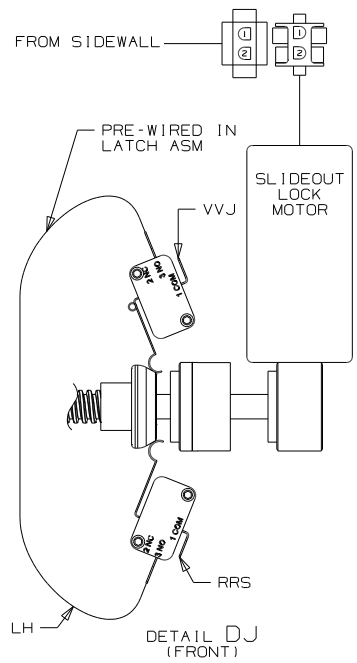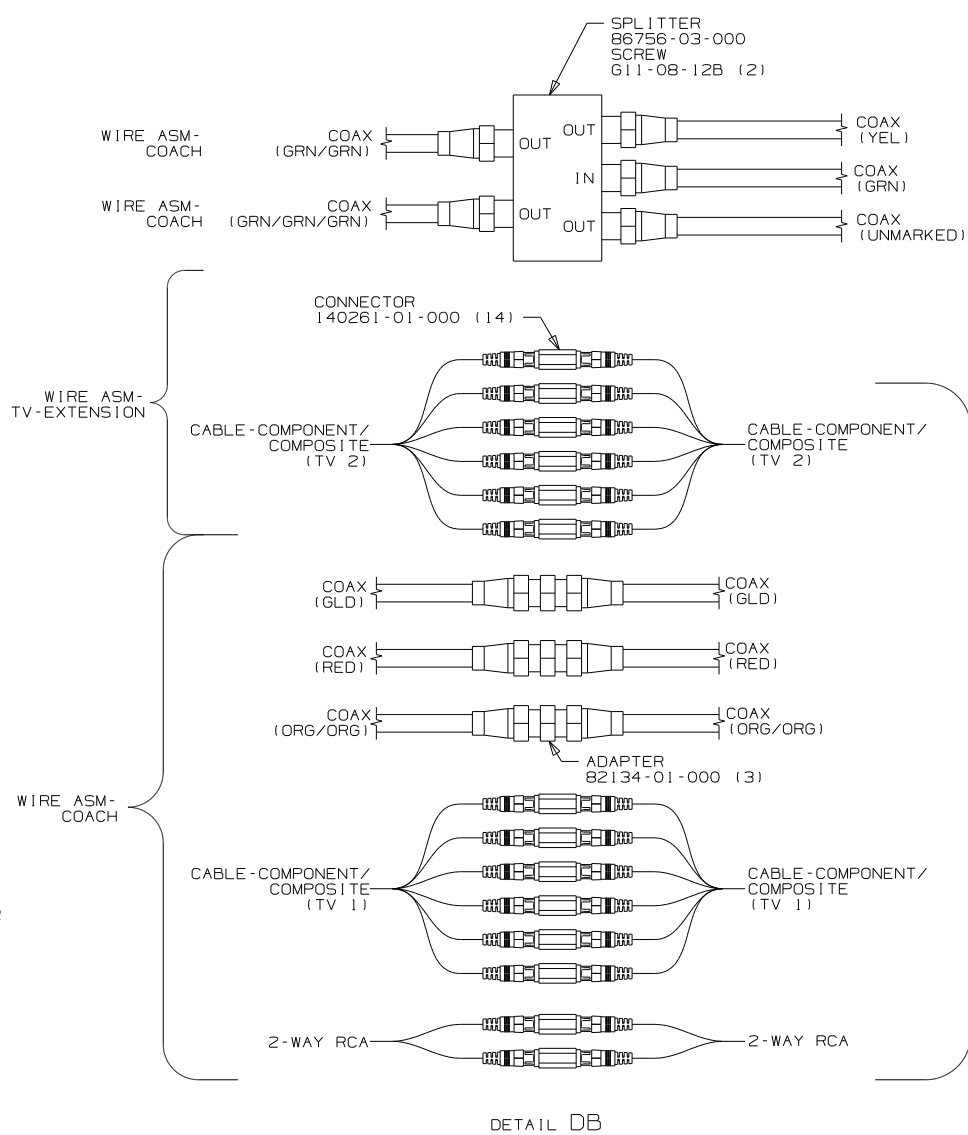


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265	CODES/STANDARDS-CSA/CMVSS
181	CODES/STANDARDS USA
181	265
FIRST USED	
11 J37F	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY, 12V	
SHEET 4	PART NO 174714 REV

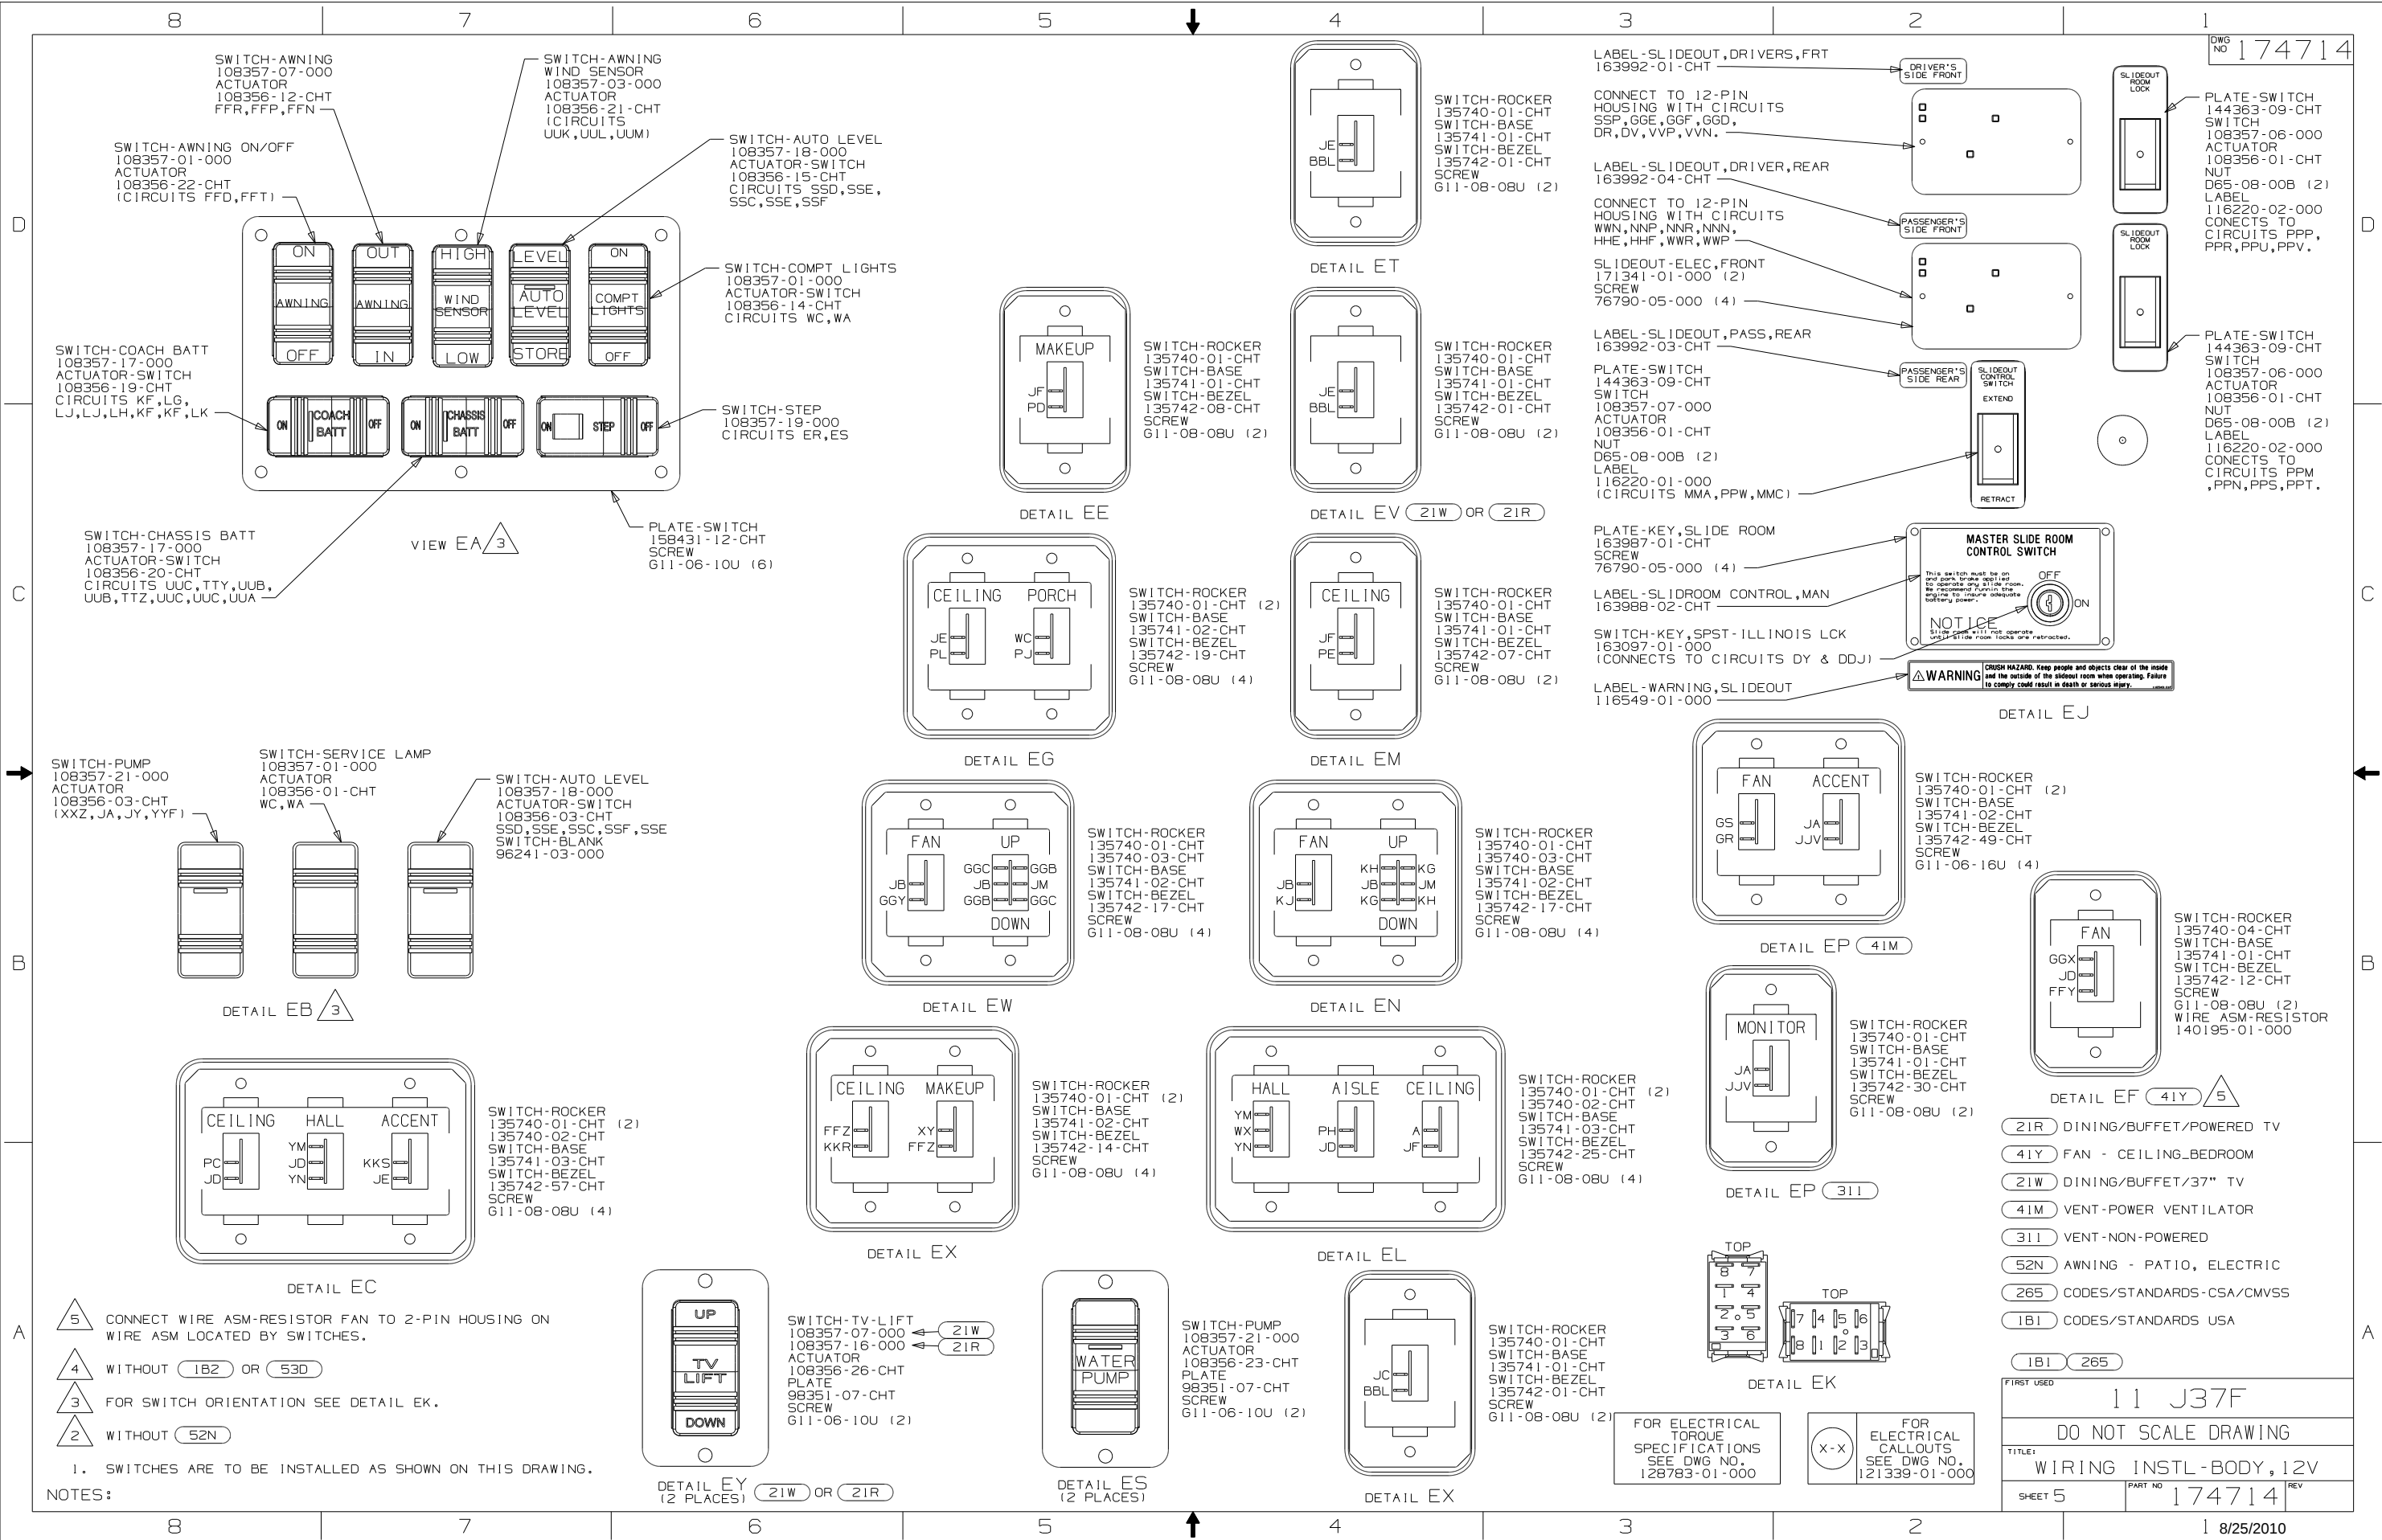

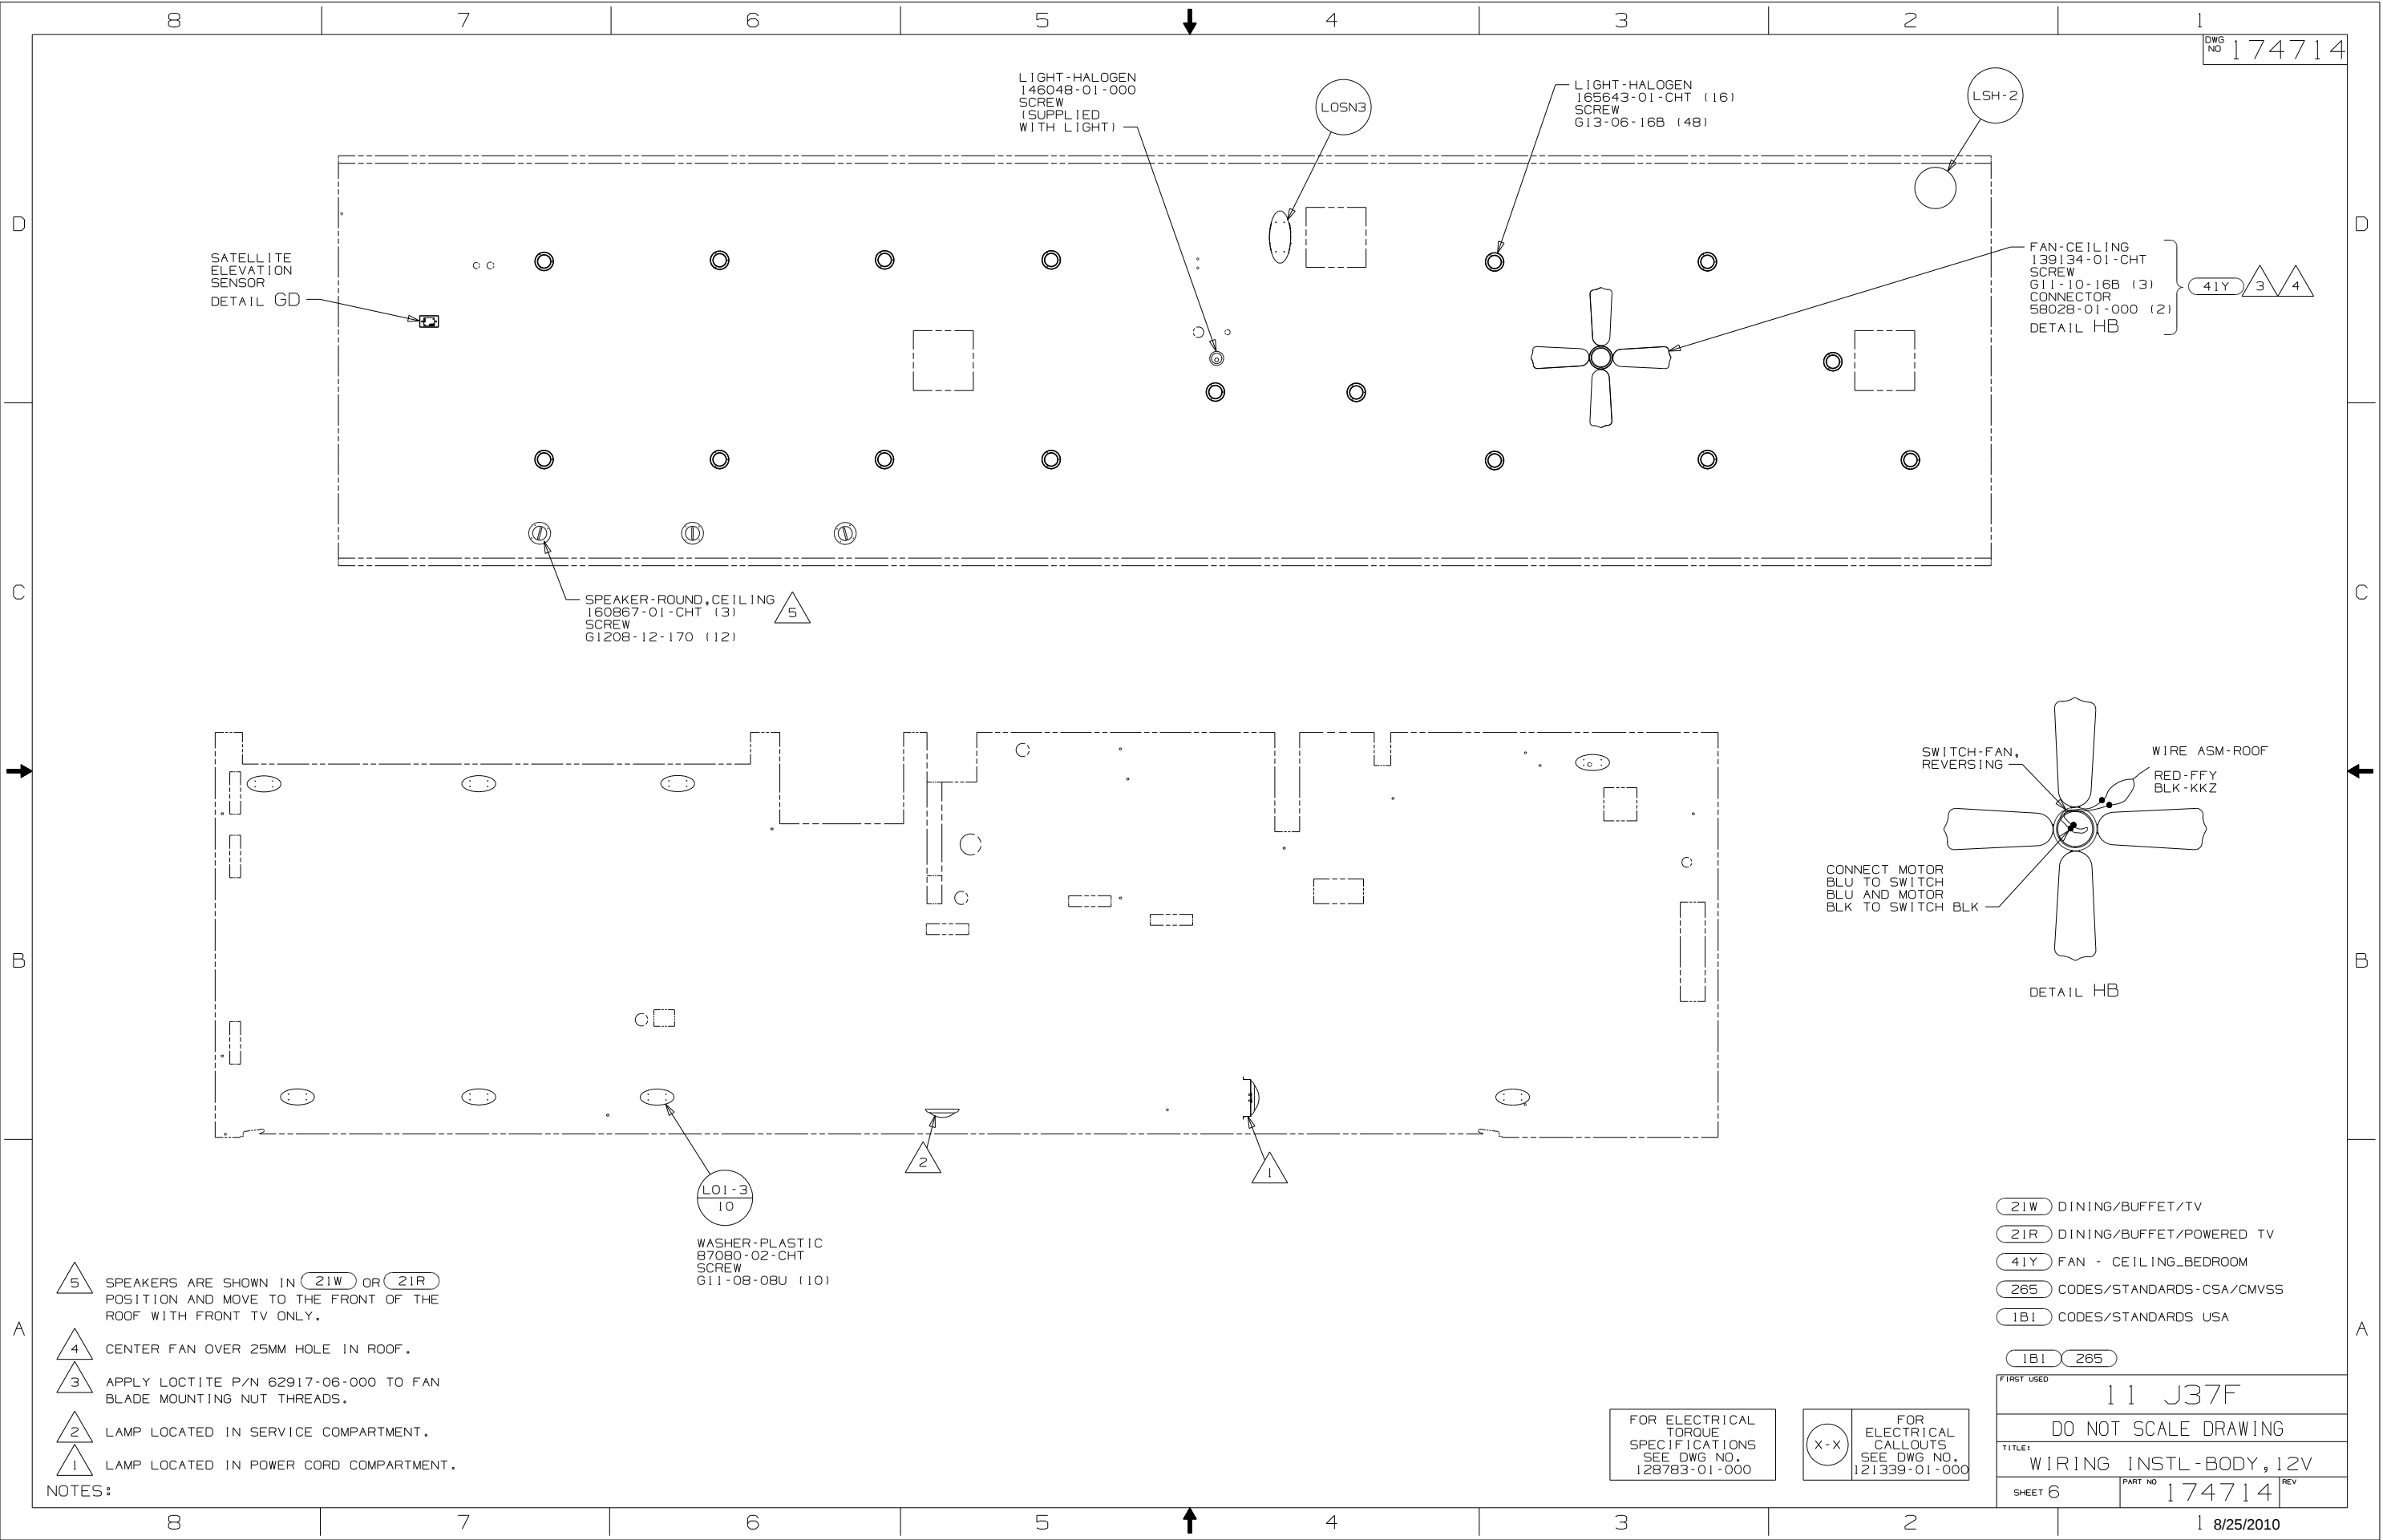


THE SATELLITE DISH WIRE CONNECTIONS ARE TO BE PLACED ON THE CENTERLINE OF THE MOTORHOME FACING FORWARD

CONNECT 9" CABLE ASM COAX (REAR TV ORG/ORG) FROM ROOF ASM TO AUX INPUT ON SATELLITE DISH


CONNECT 8' CABLE ASM COAX (FRONT TV ORG) FROM ROOF ASM TO MAIN INPUT ON SATELLITE DISH

CONNECT CABLE ASM SATELLITE CONTROL FROM ROOF ASM TO SATELLITE DISH HERE






VIEW GF - GF

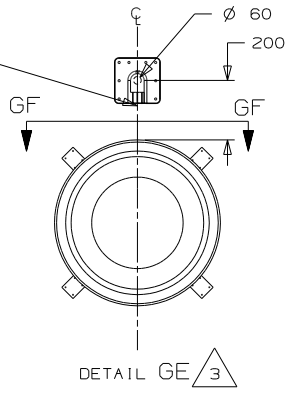

- 48P DI-2 DETAIL GE
- 78K DA-2 DETAIL GE
- 48Q DM-3 DETAIL GD

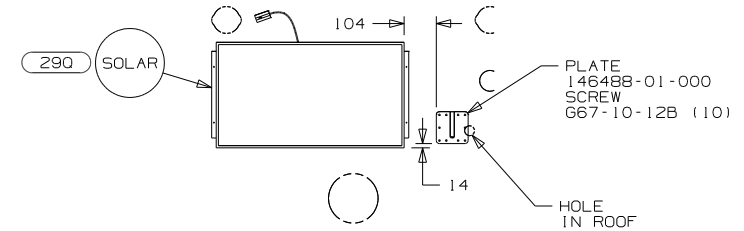

VIEW GB

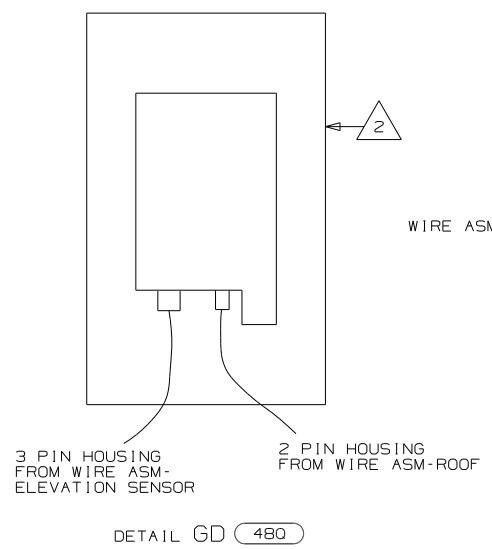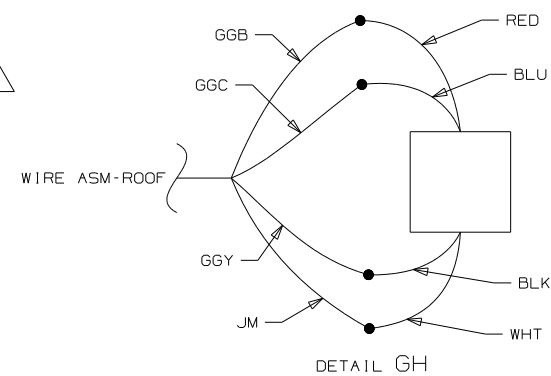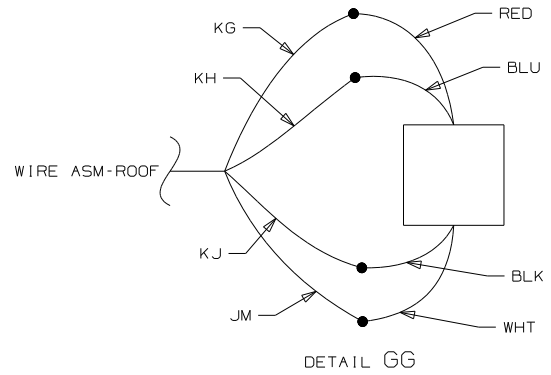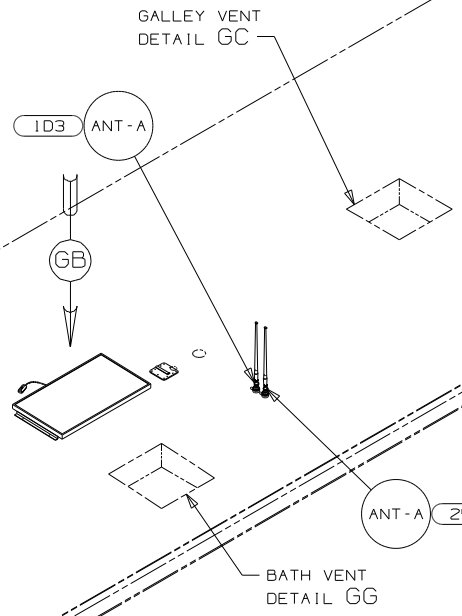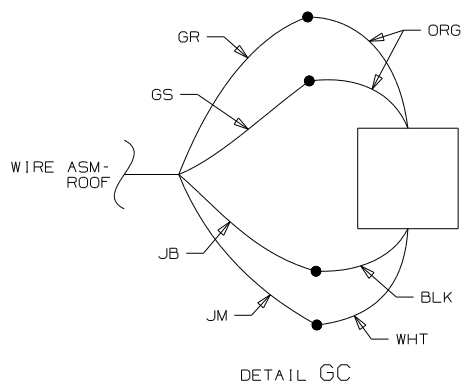


- NOTES:
- 3 REMOVE ALL SHIPPING RESTRAINTS AND FIRMLY INSERT THE SUPPLIED PLUGS INTO THE APPROPRIATE SIZED HOLES AS SPECIFIED IN THE INSTALLATION PROCESS.
 - 2 SENSOR SUPPLIED WITH SATELLITE ASSEMBLY.
 - 1 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 48P SAT TV SYSTEM IN-MOTION
- 25D STEREO SYSTEM/W/CD/DVD REAR
- 78K SATELLITE DISH-AUTOMATIC
- 48Q SATELLITE DISH & ELEV.SENSOR
- 290 SOLAR PANEL-10 WATT
- 1D3 ENTERTAIN CENTR/EXT TV-DVD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		11 J37F
DO NOT SCALE DRAWING		
TITLE:		WIRING INSTL-BODY, 12V
SHEET 7	PART NO	174714
		REV

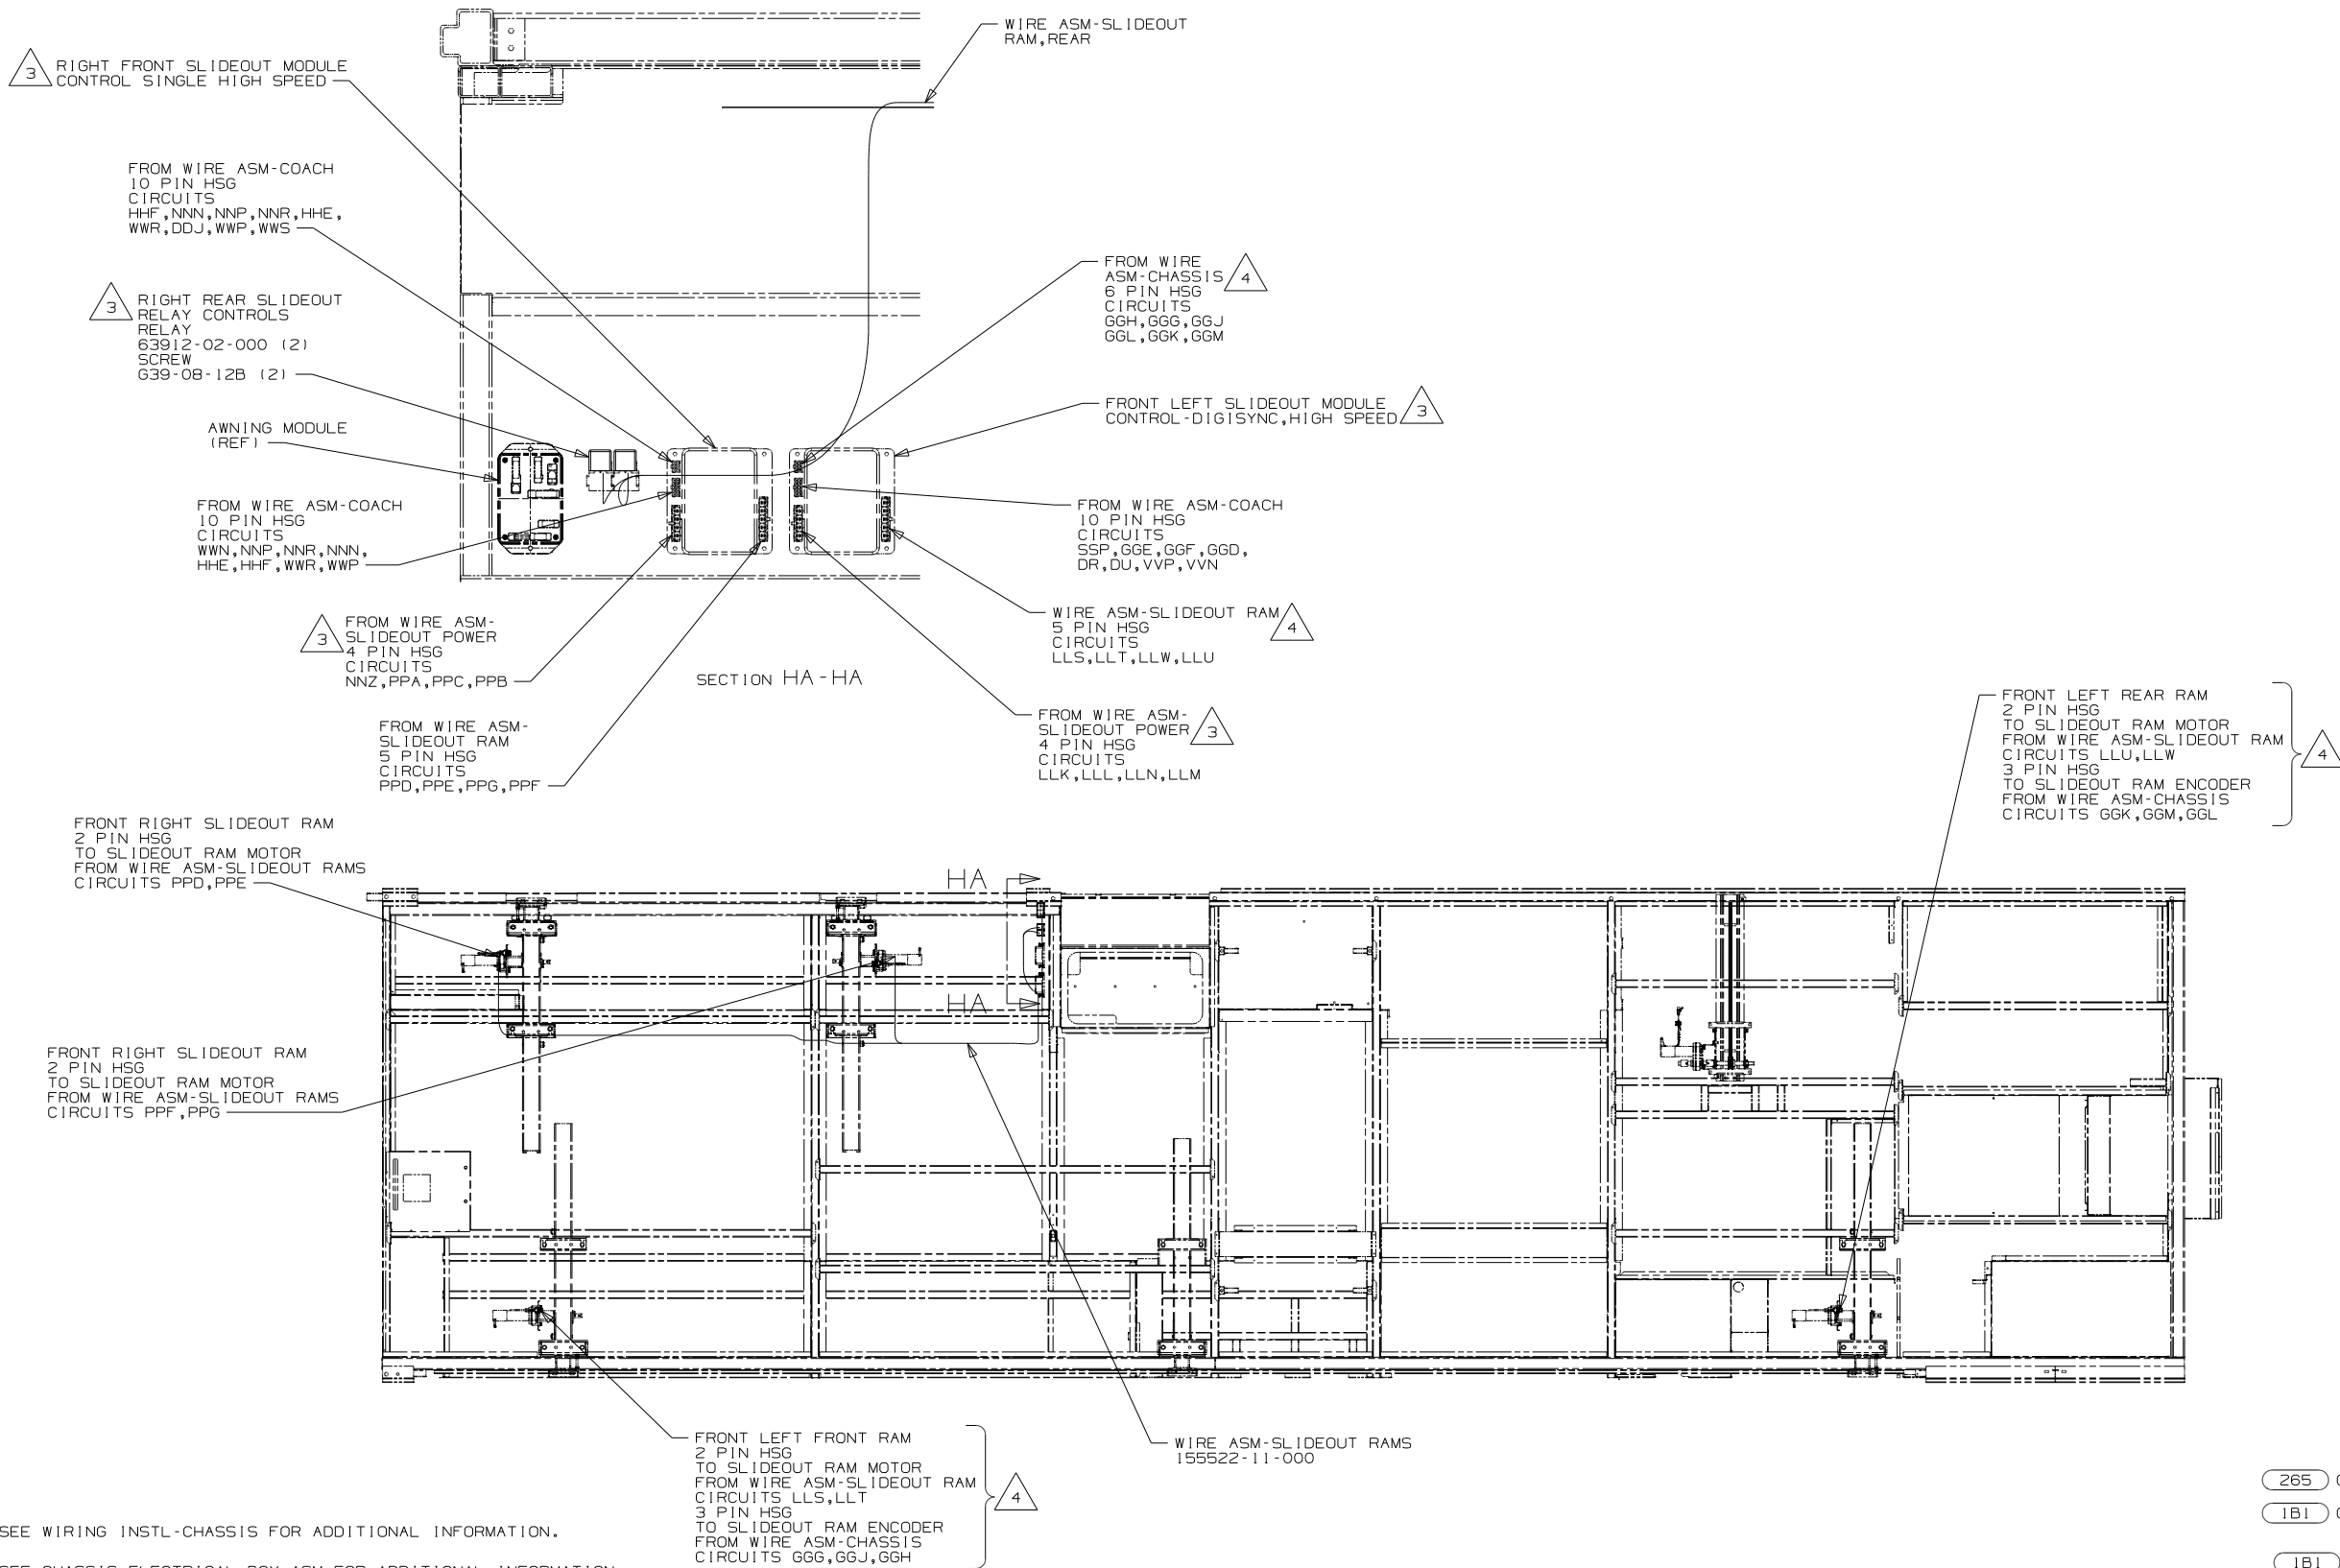

4
3

SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.

2. SEE WIRING DIAGRAM-BODY,12V FOR ADDITIONAL INFORMATION.

1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR WIRE TIE 8343-02-000 EVERY 600MM, UNLESS OTHERWISE SPECIFIED.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

181 CODES/STANDARDS USA

181 265

FIRST USED	11 J37F
TITLE	DO NOT SCALE DRAWING
SHEET 8	WIRING INSTL-BODY,12V
PART NO	174714
REV	