




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

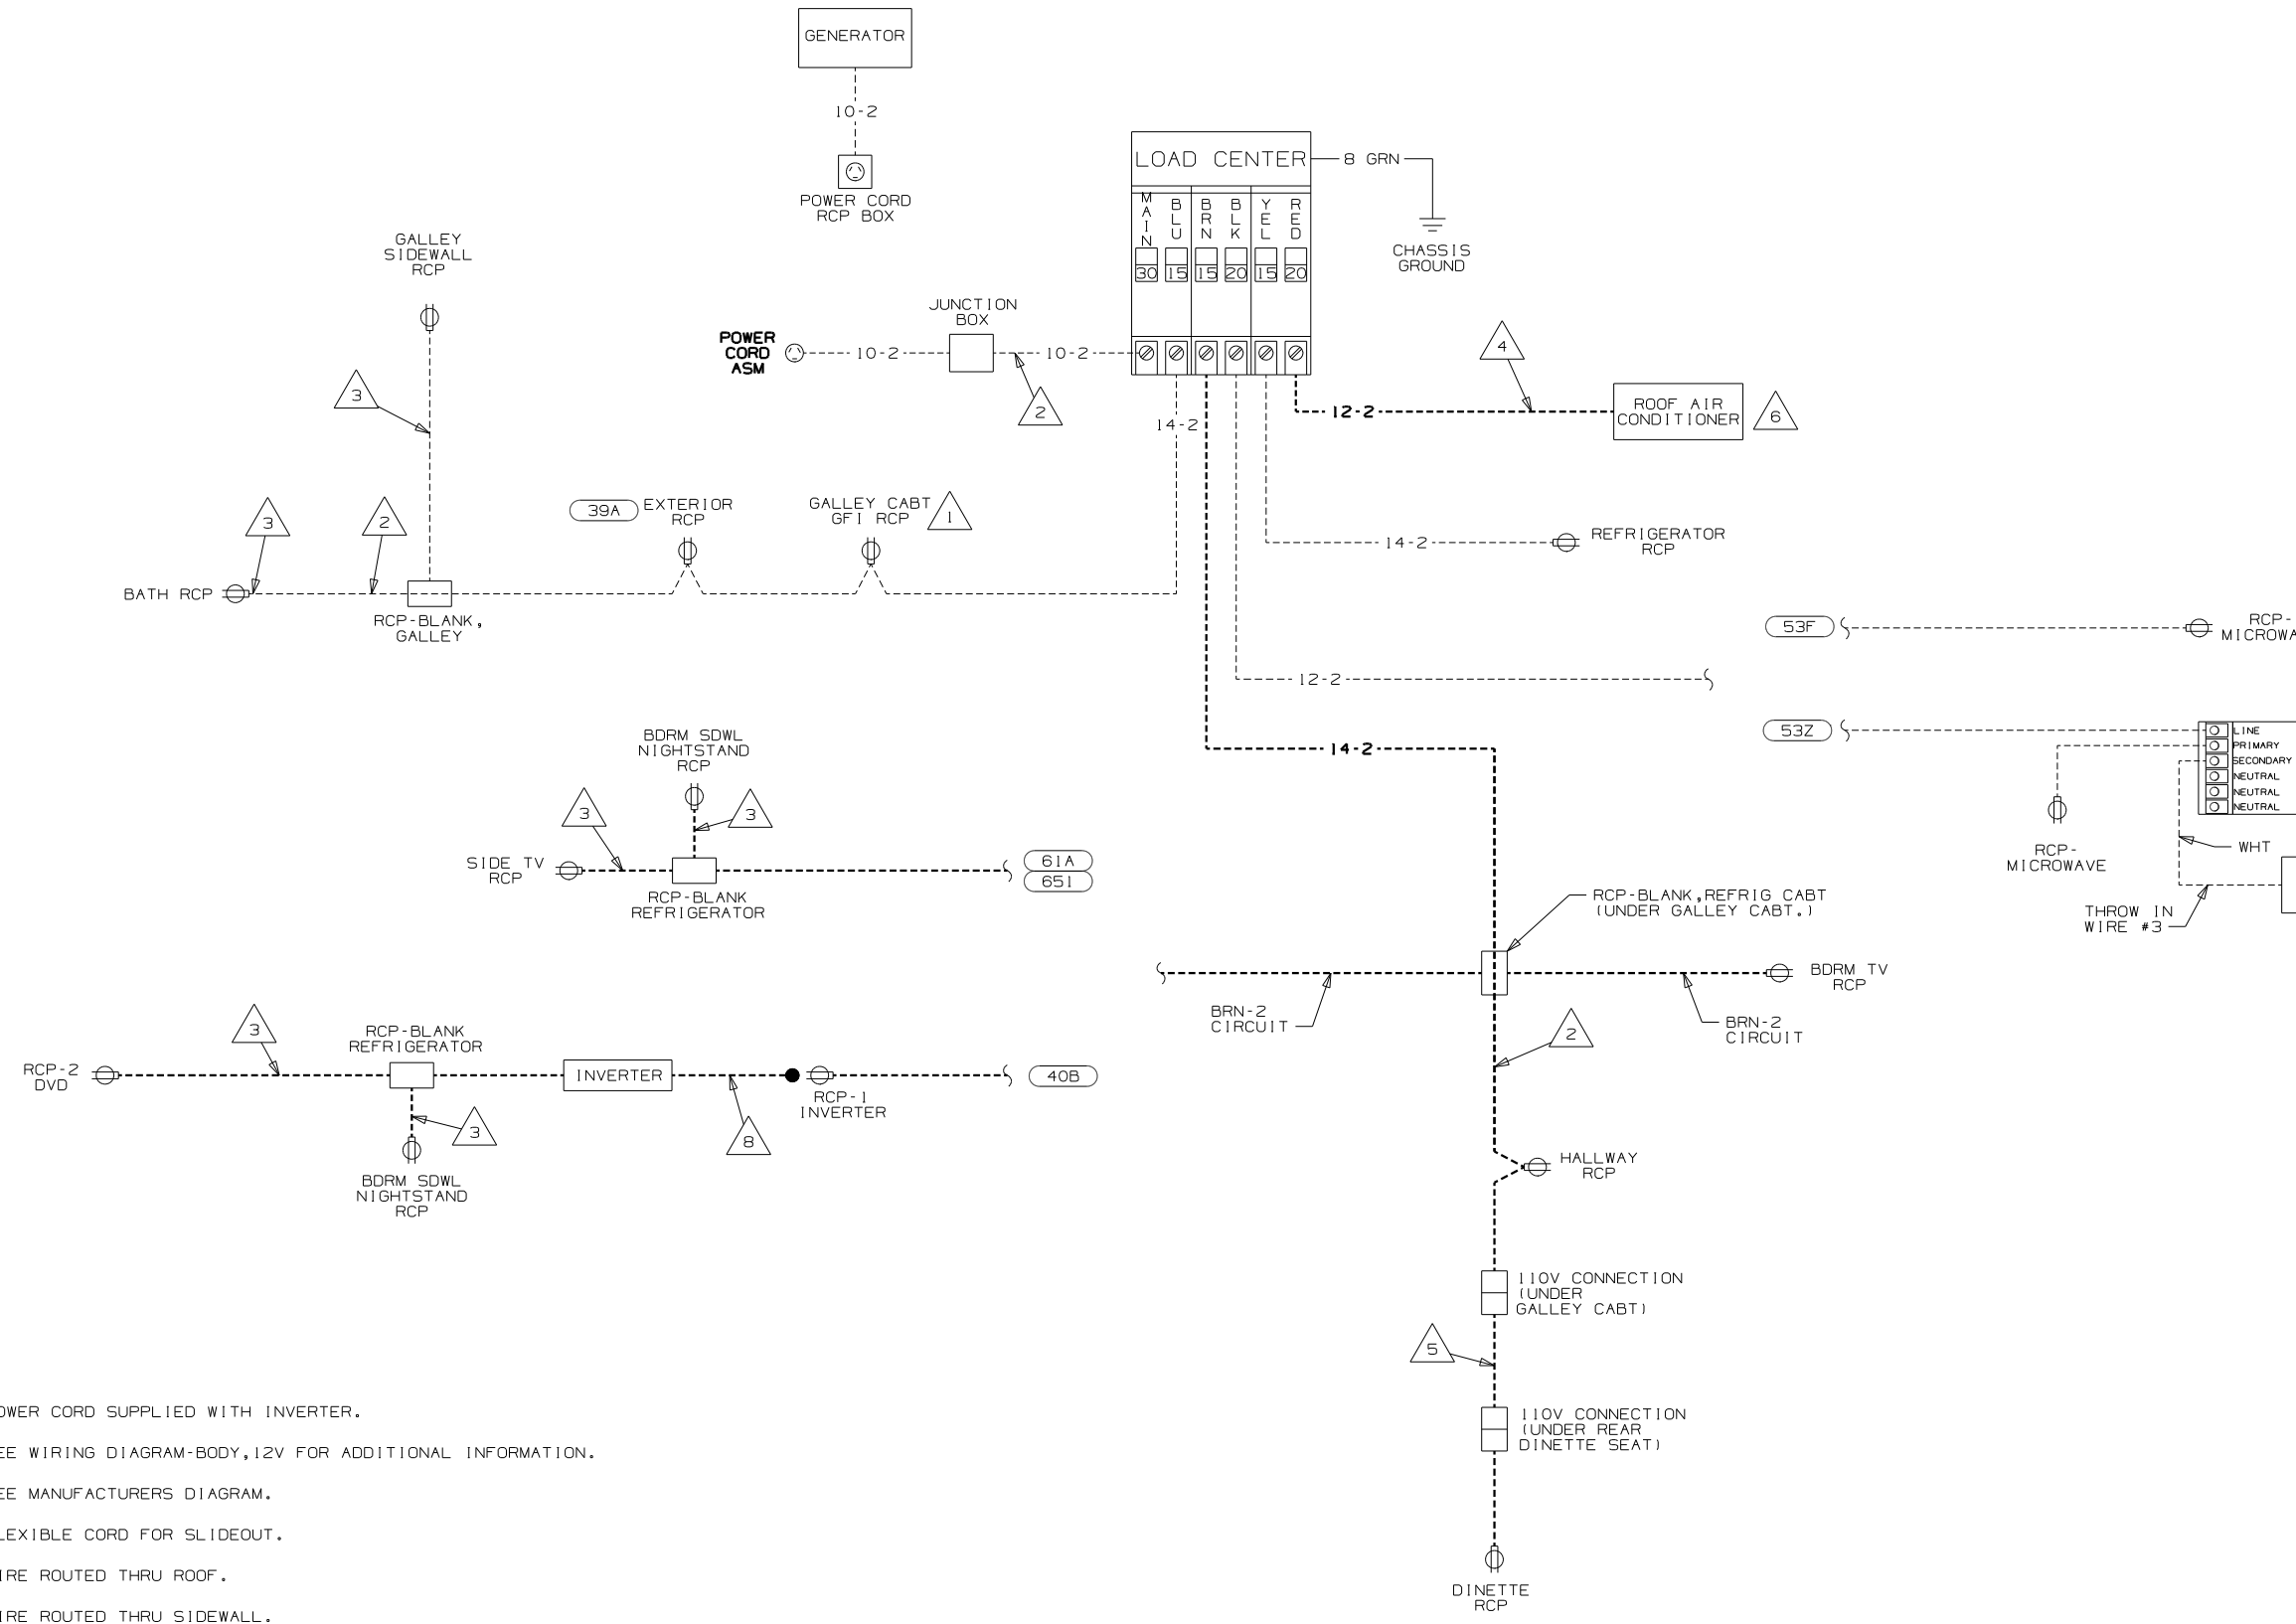

- (40B) INVERTER-DC/AC, 300 WATT
- (651) BUNK FRONT OVERHEAD-SINGLE
- (53F) WATER HEATER-ELEC. IGNITION
- (53Z) WTR HTR-6GAL ELECTRIC/LP GAS
- (39A) EXT RECEPTACLE DPLX 120VAC
- (61A) TV-26"LCD,COLOR W/REMOTE
- (12D) ELECTRICAL SYSTEM 30 AMP
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA

(1B1) (265) (12D)

WINNEBAGO COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.

DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	11 226Q
UNSPECIFIED TOLERANCES ARE:	MATERIAL:
HOLE DIM (X)	:
ONE-PLACE (X.X)	:
TWO-PLACE (X.XX)	:
ANGLE	:
THIRD ANGLE PROJECTION	

- NOTES:
- (8) POWER CORD SUPPLIED WITH INVERTER.
 - (7) SEE WIRING DIAGRAM-BODY,12V FOR ADDITIONAL INFORMATION.
 - (6) SEE MANUFACTURERS DIAGRAM.
 - (5) FLEXIBLE CORD FOR SLIDEOUT.
 - (4) WIRE ROUTED THRU ROOF.
 - (3) WIRE ROUTED THRU SIDEWALL.
 - (2) WIRE ROUTED THRU FLOOR.
 - (1) ALL OUTLETS DOWN STREAM AND INCLUDING THIS OUTLET ARE GROUND FAULT CIRCUIT INTERRUPT PROTECTED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

(X-X) FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000