



DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

WIN

1

LAMP-MARKER, AMBER
 117826-02-000
 GASKET-MARKER LIGHT
 117826-03-000
 BULB
 36196-01-000
 SCREW
 G11-08-12U (EXT) (2)

LAMP ASM-AUXILLARY
 129746-01-000
 NUT
 40921-05-000 (2)
 SCREW
 G39-08-10U (EXT)
 SHIM-STRIKER
 120494-03-CHT (1)

2. REMOVE AND REINSTALL AFTER PAINT

1. INSTALL AFTER PAINT.

NOTES:

ITA	ITASCA ONLY
WIN	WINNEBAGO ONLY
265	CODES/STANDARDS-CSA/CMVSS
IBI	CODES/STANDARDS USA
IBI	265


	COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.
	

DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	
DSNR	
	FIRST USED 11 R-SERIES

UNSPECIFIED TOLERANCES ARE : WHOLE DIM (X) : 3 ONE-PLACE (X,X) : 1,5 TWO-PLACE (X,XX) : 0,50 ANGLE : 1°	MATERIAL :
THIRD ANGLE PROJECTION  	


DO NOT SCALE DRAWING

TITLE:			
WIRING INSTL-EXTERIOR LAMPS			
SHEET 1 OF 3	PART NO	REV	175176

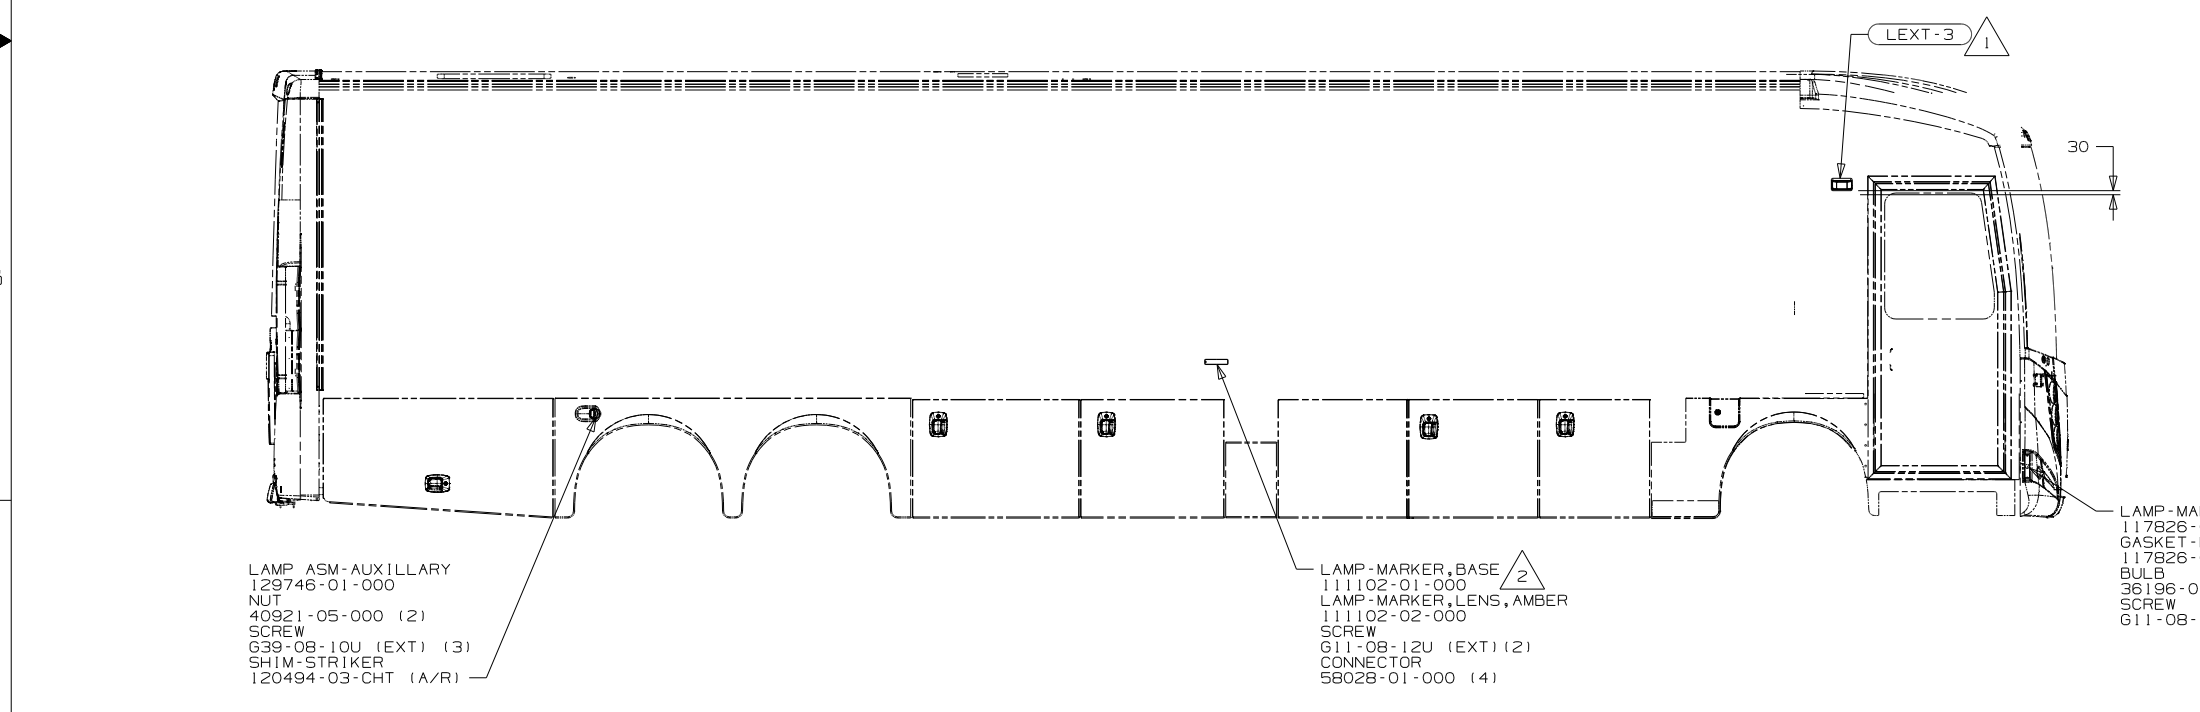

		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFT# _____		ORIG. DATE _____	
CHR# _____		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E. _____		FIRST USED _____	
M.E. _____		11 R-SERIES	
DSN# _____		_____	
UNDESIGNED TOLERANCES ARE:		MATERIAL: _____	
WHOLE DIM (X) ± 3		_____	
ONE-PLACE (X,X) ± 1.5		_____	
TWO-PLACE (X,XX) ± 0.50		_____	
ANGLE ± 1°		_____	
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-EXTERIOR LAMPS			
SHEET 1 OF 3		PART NO 175176	
_____		REV _____	

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000	X-X	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
--	---	---

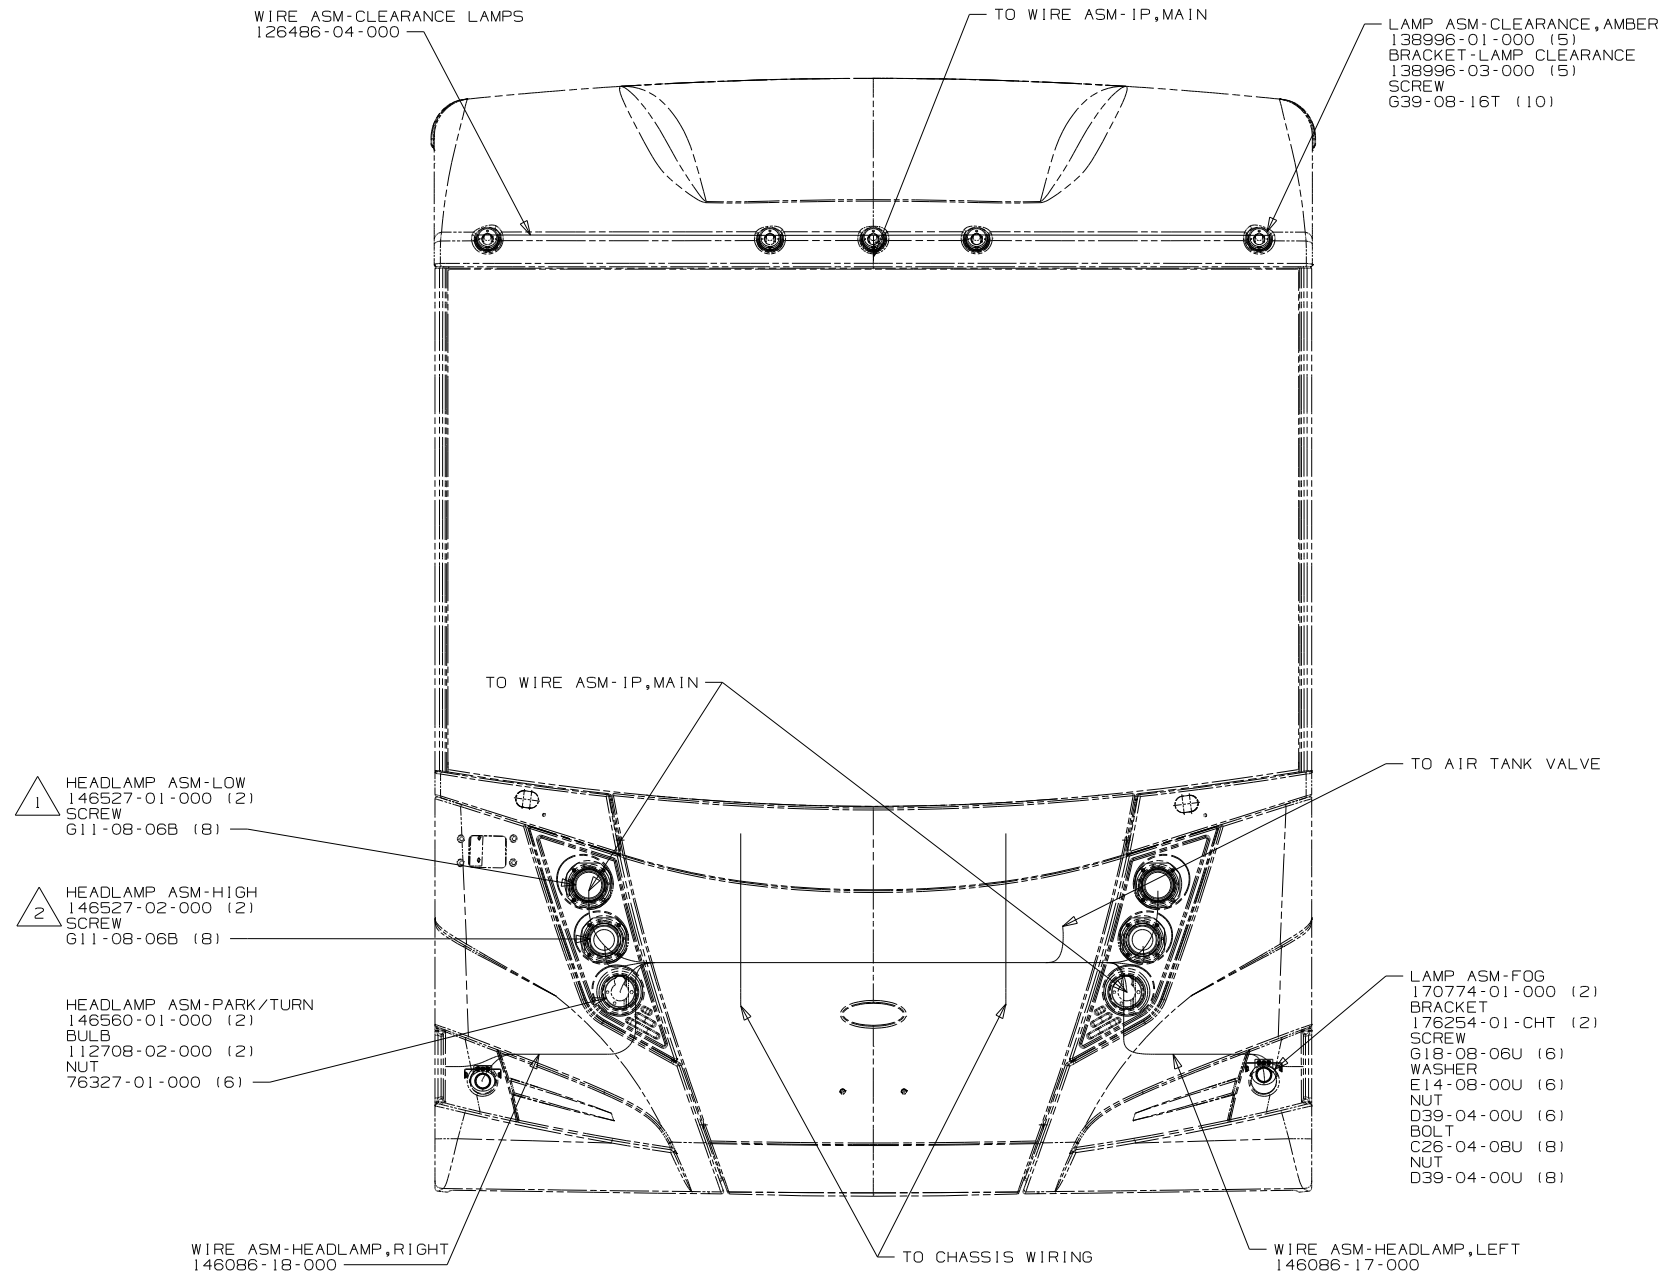

2 THE 2 PIN HOUSING WITH CIRCUITS NB & DDM, FOR THE RIGHT SIDE, AND NB & DDL FOR THE LEFT SIDE IS TO BE PLUGGED INTO THE INBOARD HIGH BEAM HEADLAMP.

1 THE 2 PIN HOUSING WITH CIRCUITS NA & DDM, FOR THE RIGHT SIDE, AND NA & DDL FOR THE LEFT SIDE IS TO BE PLUGGED INTO THE OUTBOARD LOW BEAM HEADLAMP.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS



1B1 CODES/STANDARDS USA

1B1 265


11 R-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-EXTERIOR LAMPS		
SHEET 2	PART NO 175176	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

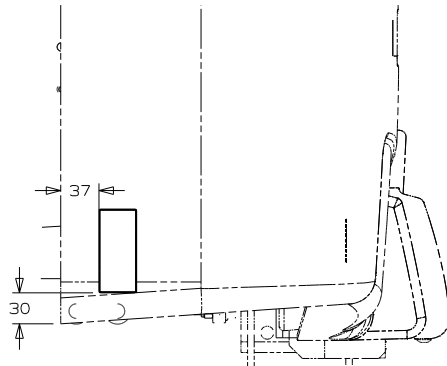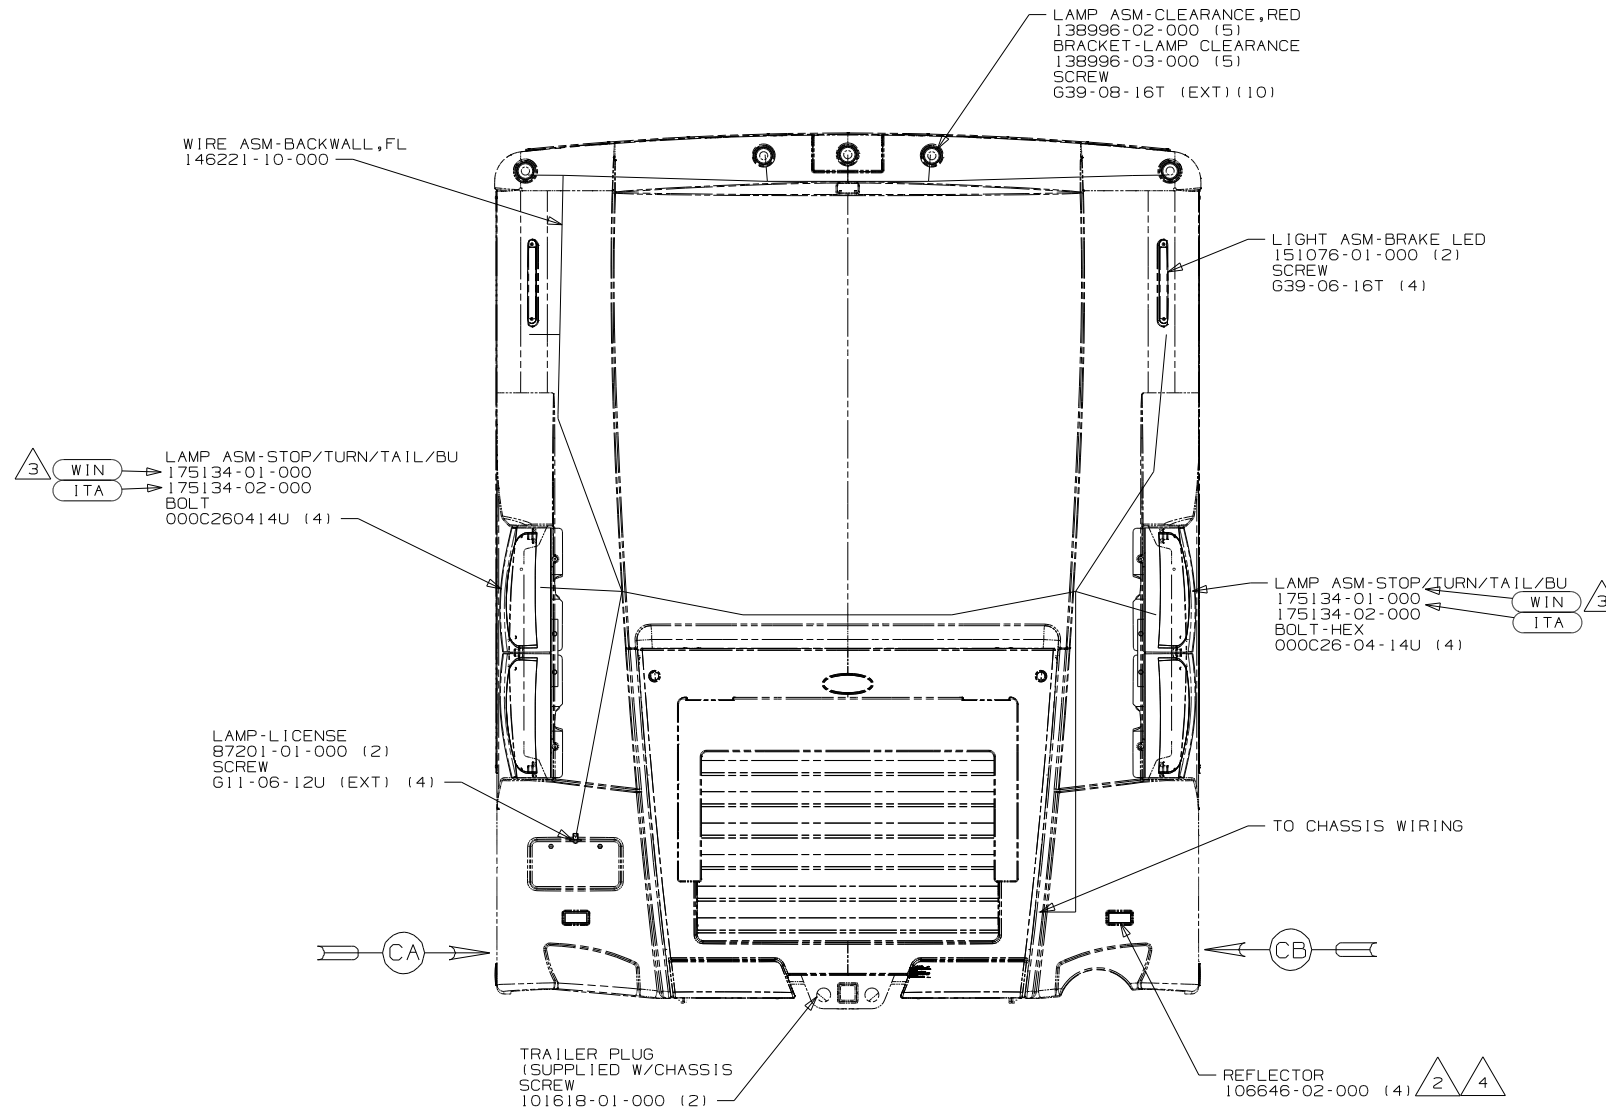

VIEW CA

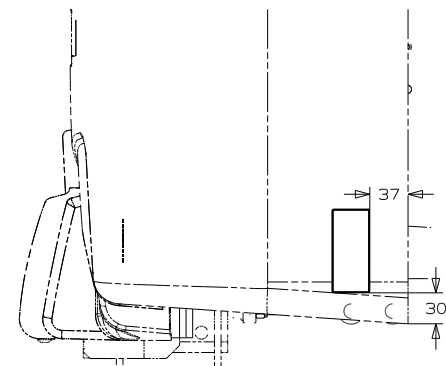

VIEW CB

4. INSTALL AFTER PAINT.
3. ROUT VENT HOSES TOWARD BOTTOM OF LAMP ASSEMBLIES.
2. REMOVE PAPER BACKING FROM REFLECTOR AND PREP APPLICATION SURFACE WITH ISOPROPYL ALCOHOL WIPE BEFORE INSTALLATION.

1. CONNECTOR-PLUG, TRAILER (146246-01-000)
TO BE SUPPLIED IN COACH WITH 240

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

ITA ITASCA ONLY
WIN WINNEBAGO ONLY
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

11 R-SERIES	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-EXTERIOR LAMPS	
SHEET 3	PART NO 175176
1 1/11/2011	