



**DANGER**


**Danger of electrical shock, burns or death.** Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.




**CAUTION**

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.



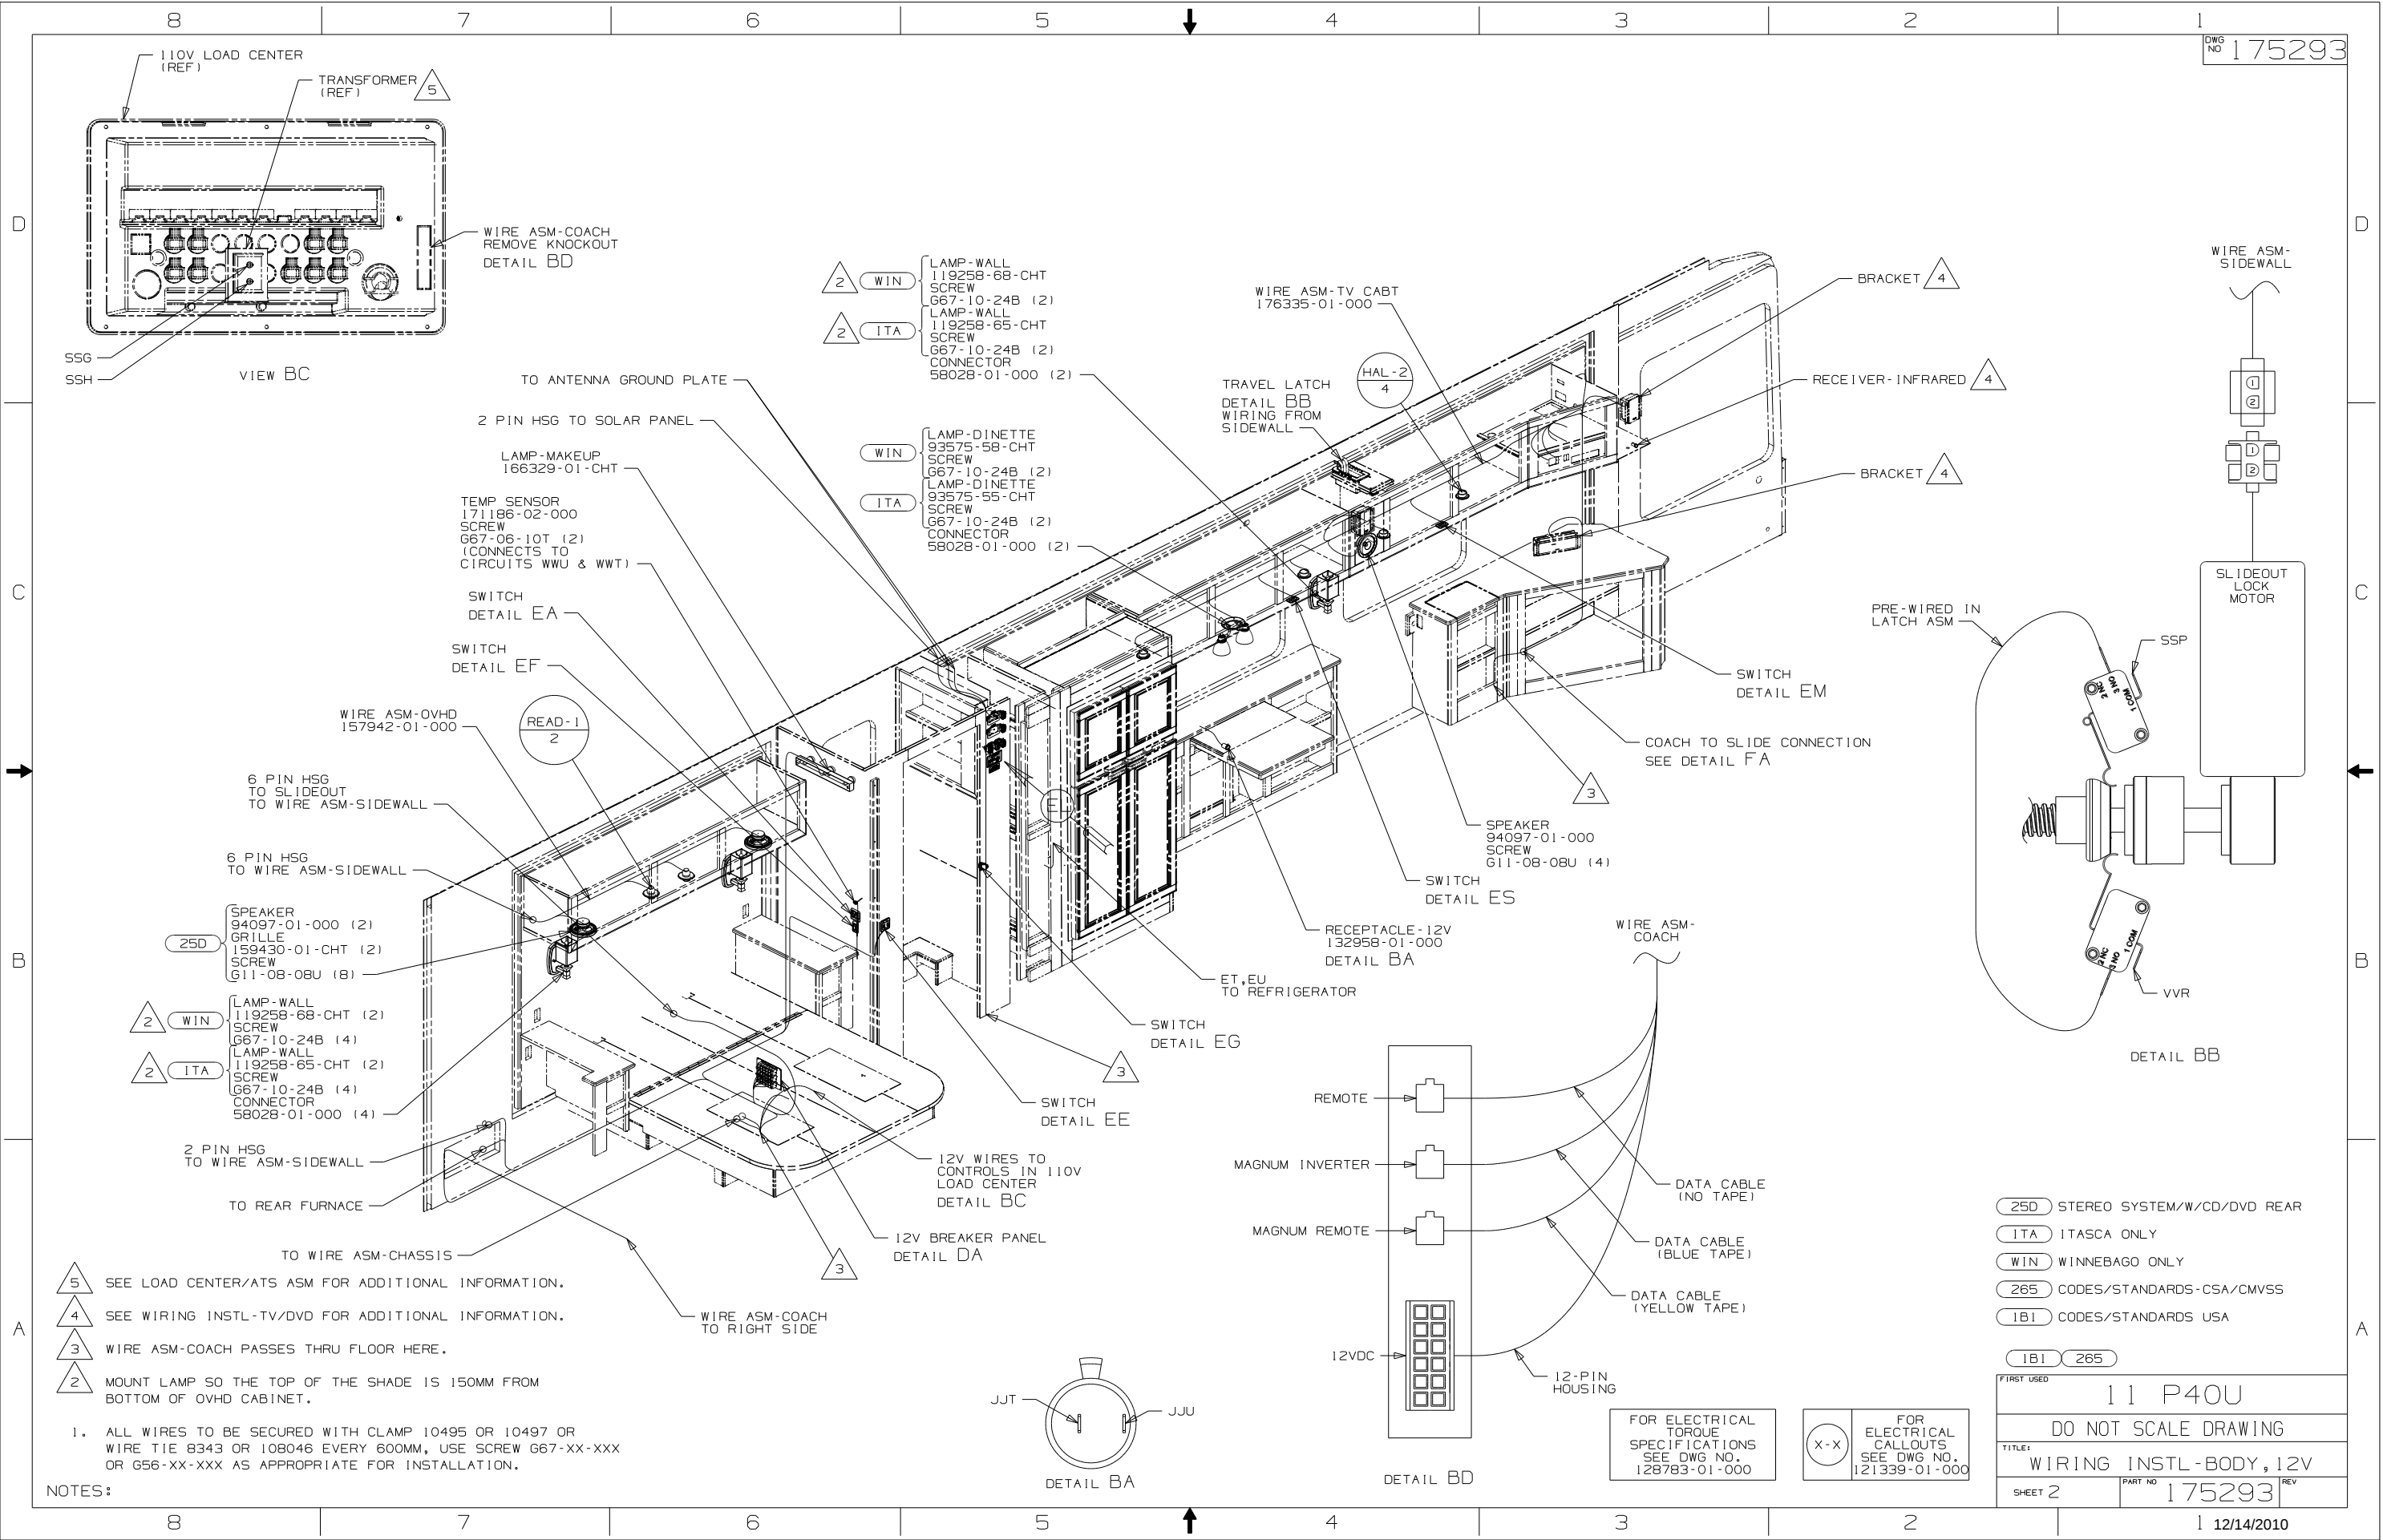

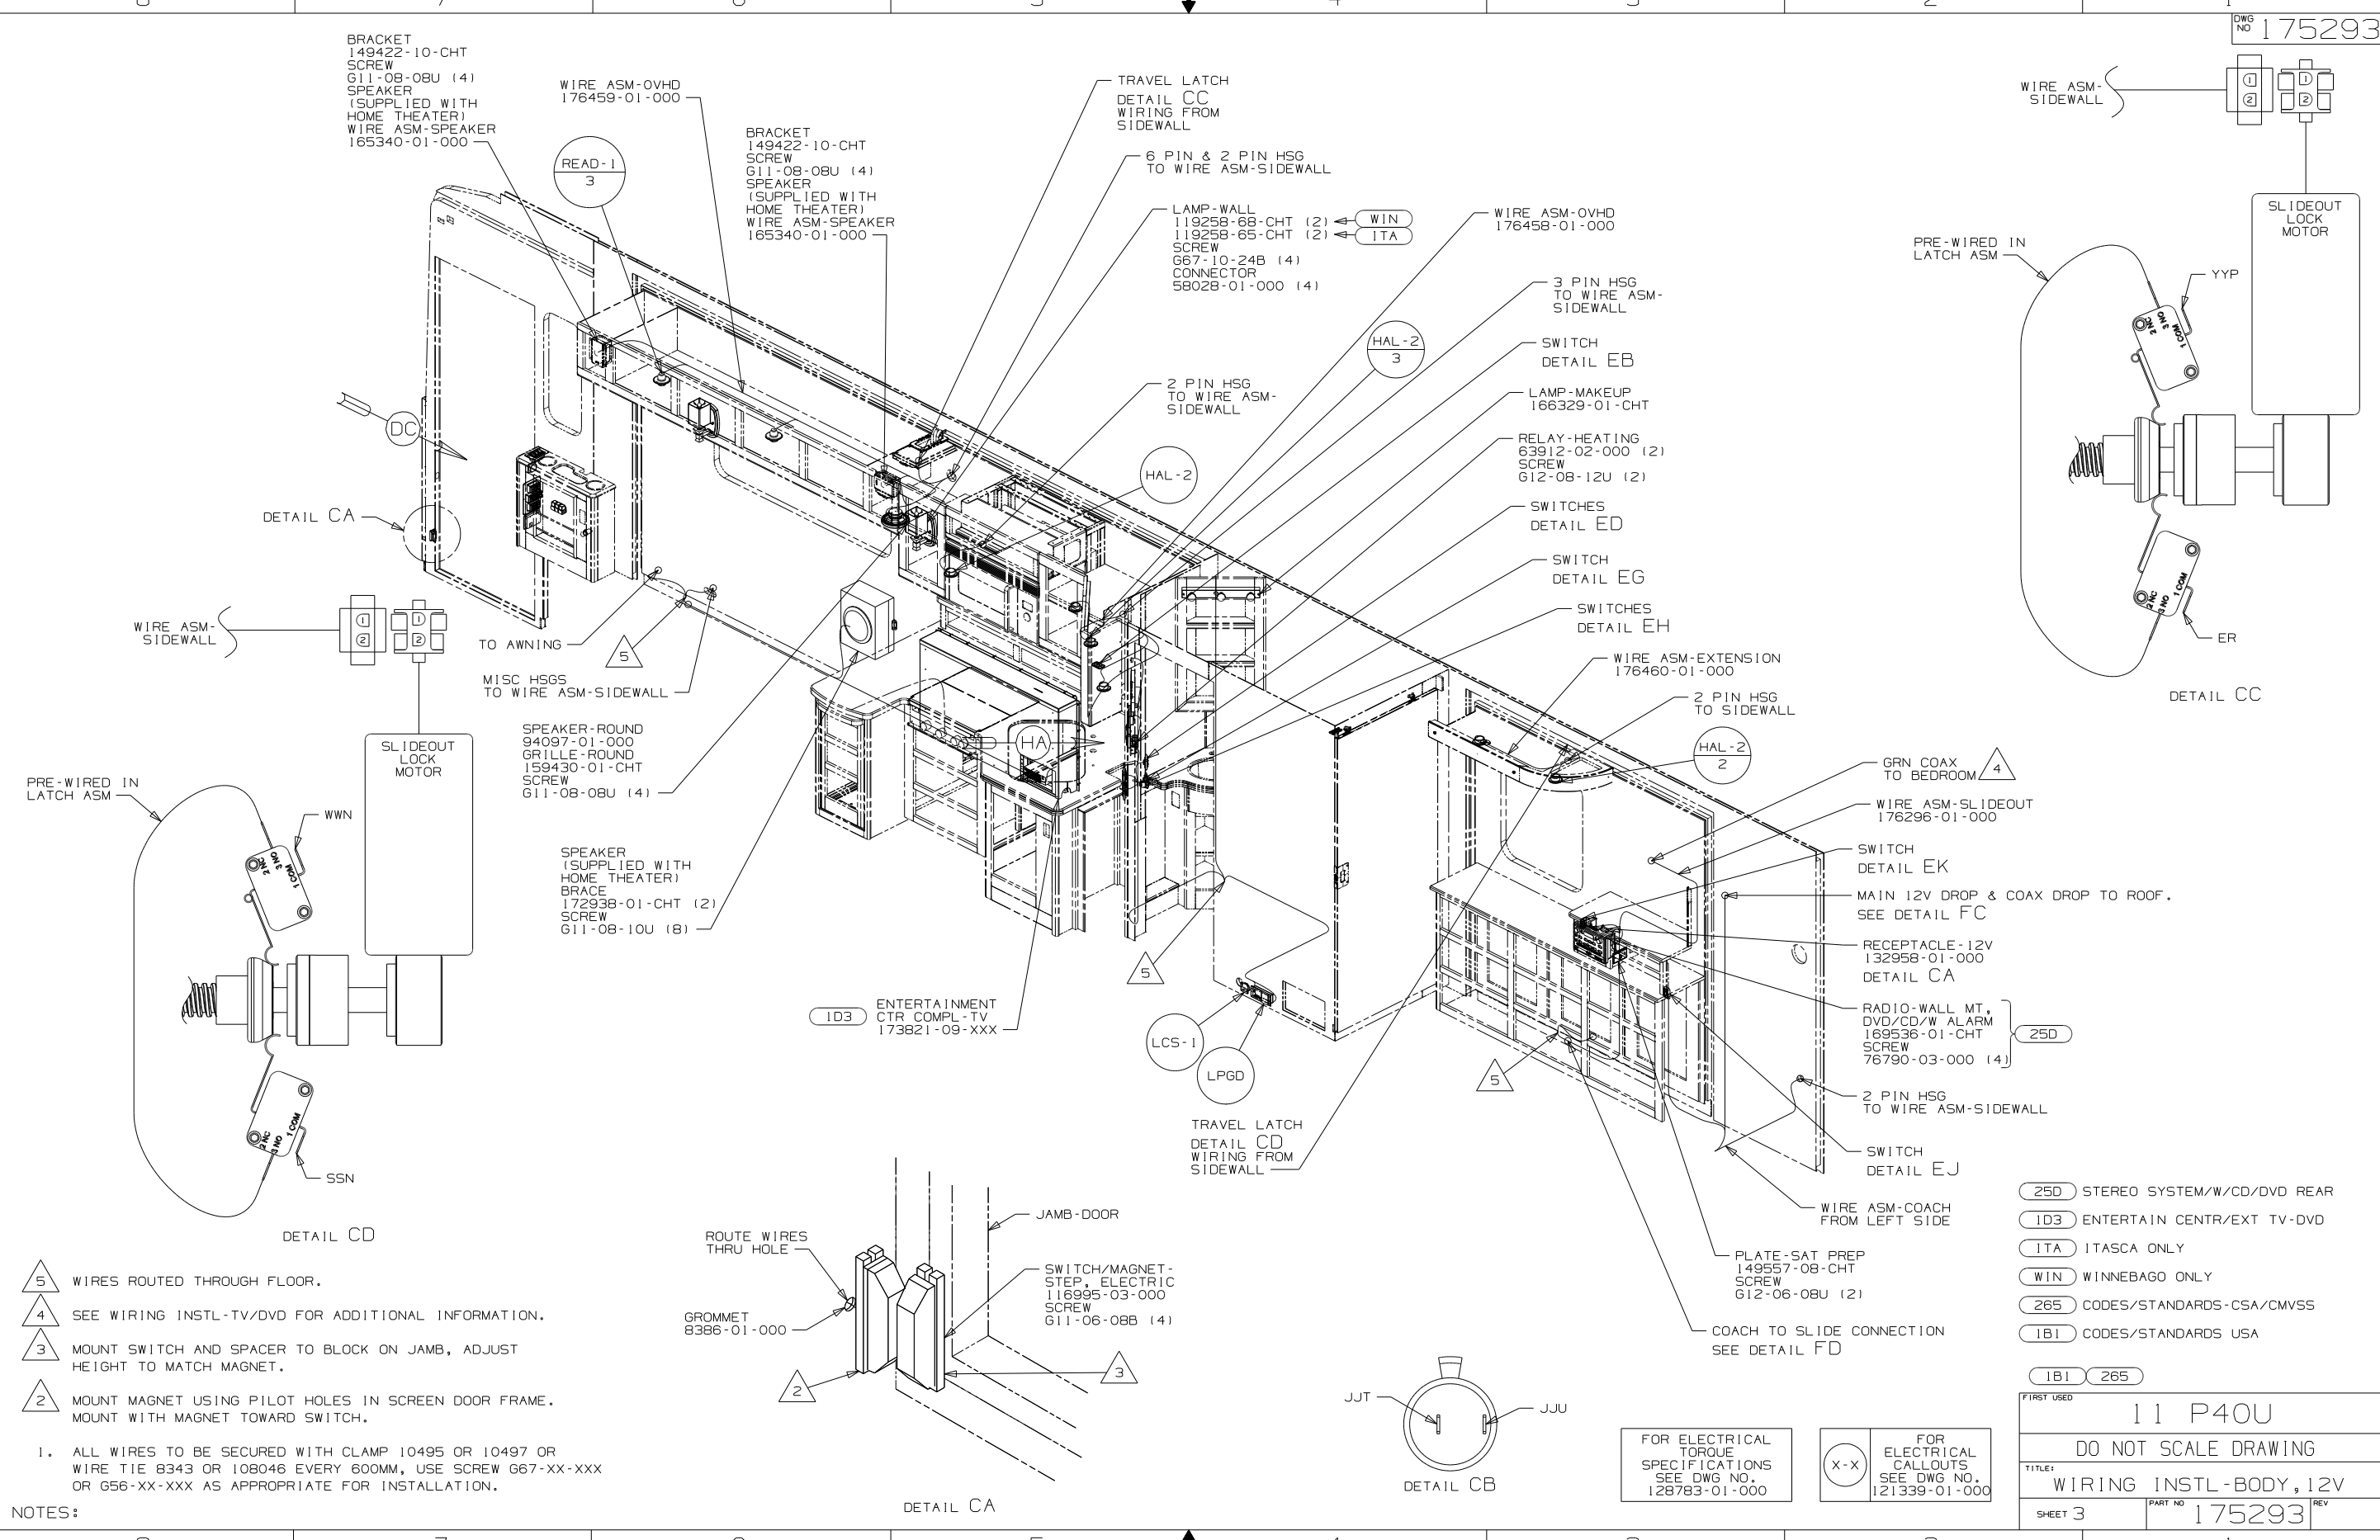

- 5 WIRES ROUTED THROUGH FLOOR.
- 4 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
- 3 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB, ADJUST HEIGHT TO MATCH MAGNET.
- 2 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

|     |                             |
|-----|-----------------------------|
| 250 | STEREO SYSTEM/W/CD/DVD REAR |
| 103 | ENTERTAIN CENTR/EXT TV-DVD  |
| ITA | ITASCA ONLY                 |
| WIN | WINNEBAGO ONLY              |
| 265 | CODES/STANDARDS-CSA/CMVSS   |
| 1B1 | CODES/STANDARDS USA         |
| 1B1 | 265                         |


|                        |                      |
|------------------------|----------------------|
| FIRST USED             | 11 P40U              |
| TITLE:                 | DO NOT SCALE DRAWING |
| WIRING INSTL-BODY, 12V |                      |
| SHEET 3                | PART NO 175293 REV   |
|                        | 12/14/2010           |

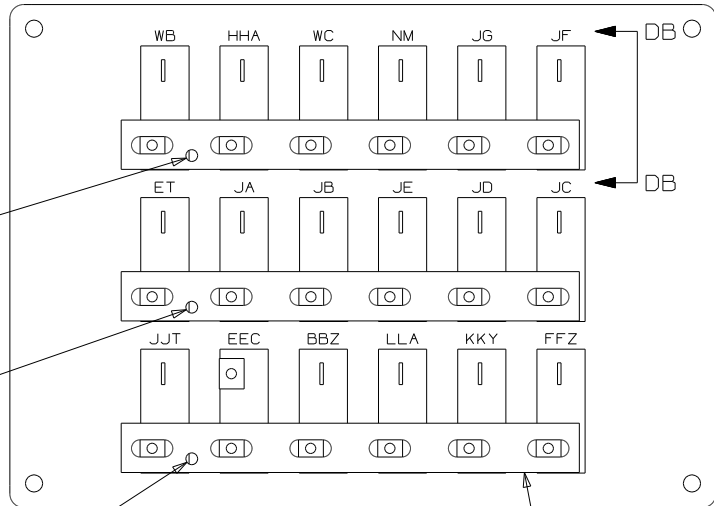

DETAIL DA  
(BACK VIEW)

BUSS BAR  
141744-05-000 (3)  
SCREW  
G39-08-06B (3)

CIRCUIT BREAKER  
93654-02-000 (15)  
SCREW  
G52-06-04B (15)  
WASHER  
OME02B-04-071 (15)

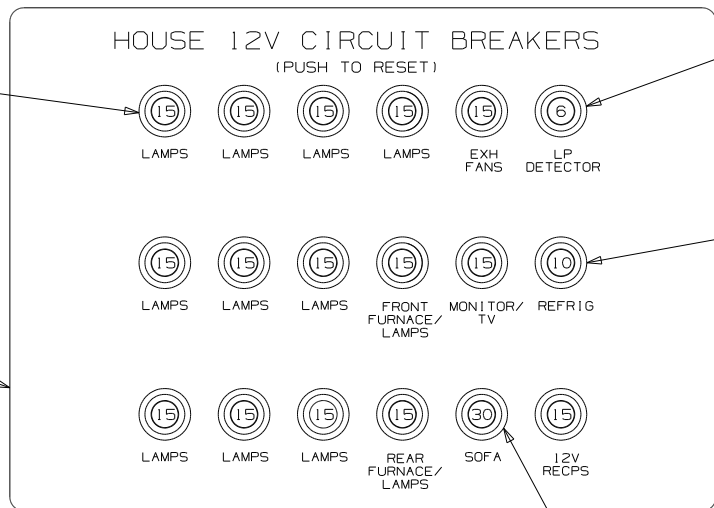


DETAIL DA  
(FRONT VIEW)

CIRCUIT BREAKER  
93654-01-000 (2)  
(6 AMP)  
SCREW  
G52-06-04B (2)  
WASHER  
OME02B-04-071 (2)


CIRCUIT BREAKER  
93654-05-000  
(10 AMP)  
SCREW  
G52-06-04B  
WASHER  
OME02B-04-071

CIRCUIT BREAKER  
93655-02-000  
(30 AMP)  
SCREW  
G52-06-04B  
WASHER  
OME02B-04-071

PLATE  
139067-06-CHT  
LABEL  
92547-14-000  
SCREW  
G11-10-12U (4)

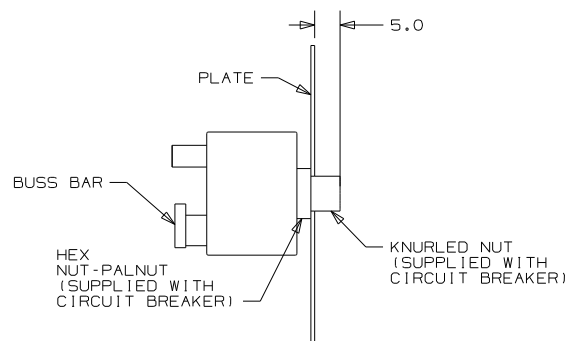

VIEW DB-DB

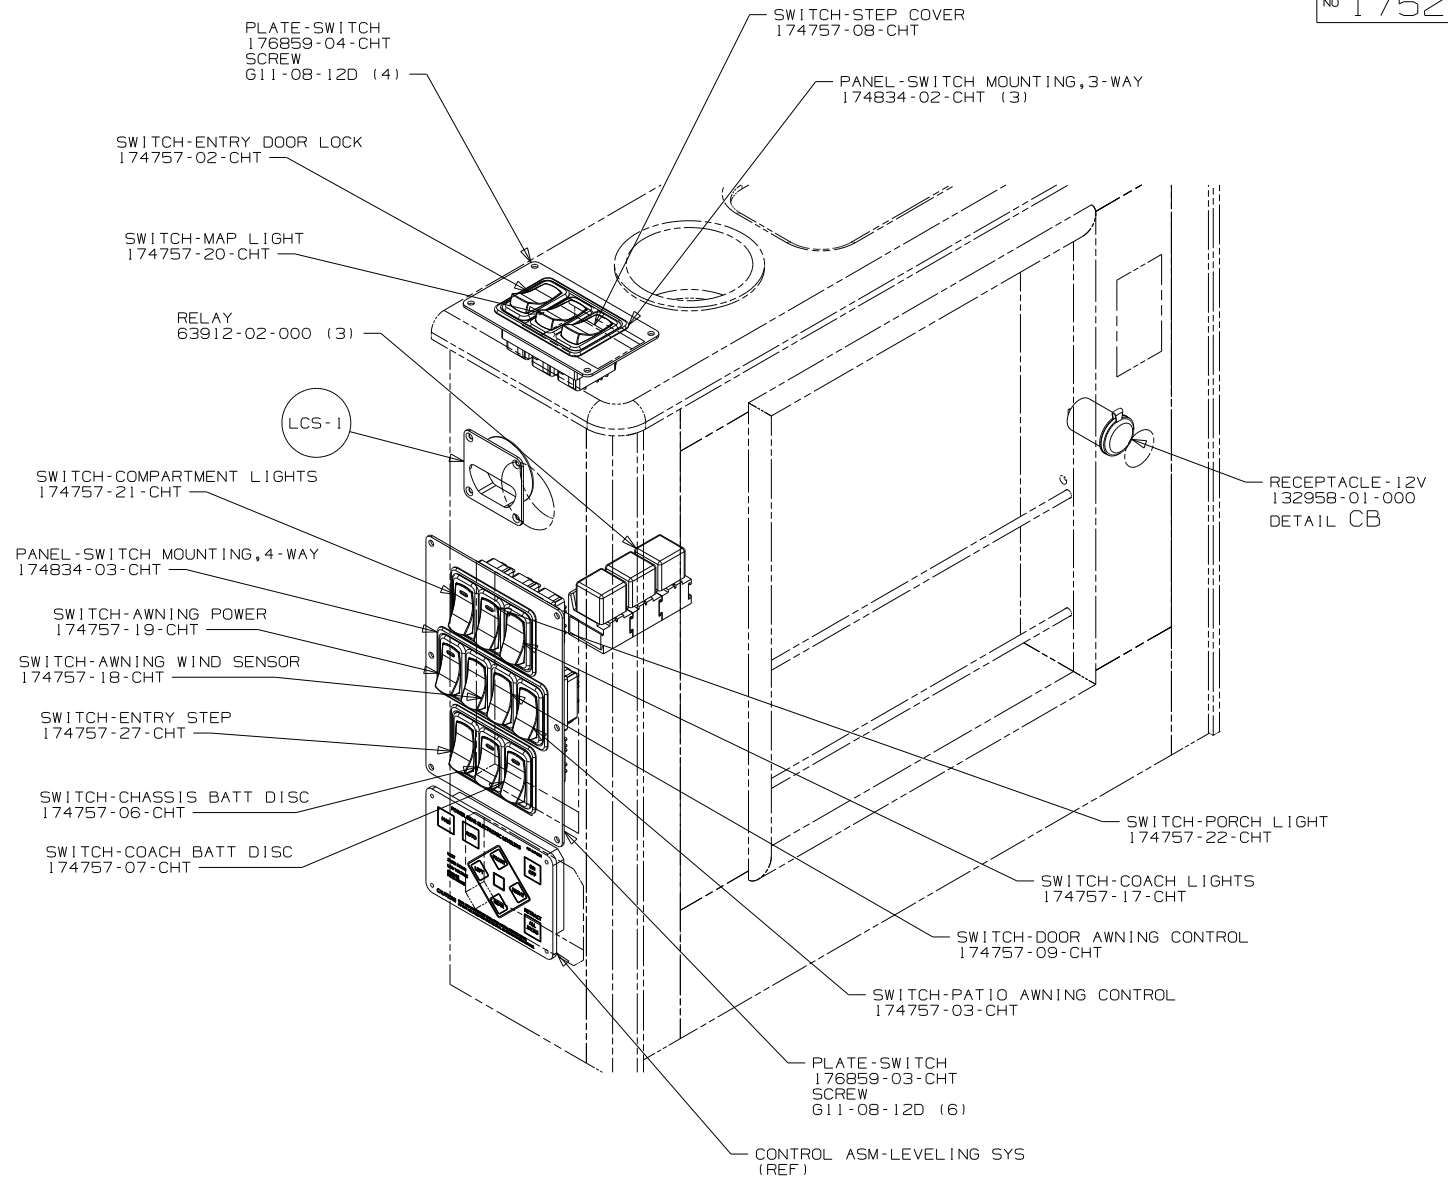

DETAIL DC


FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000


265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

1B1 265


|                                  |         |         |     |
|----------------------------------|---------|---------|-----|
| FIRST USED                       |         | 11 P40U |     |
| DO NOT SCALE DRAWING             |         |         |     |
| TITLE:<br>WIRING INSTL-BODY, 12V |         |         |     |
| SHEET 4                          | PART NO | 175293  | REV |





DETAIL EA




DETAIL EF 41Y




DETAIL EM

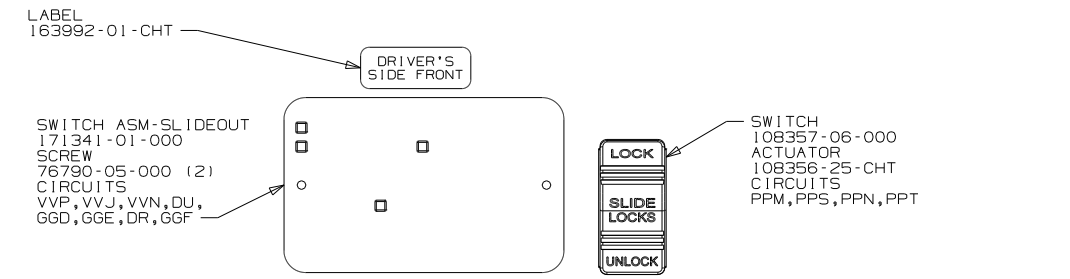



DETAIL EB




DETAIL EG (2 PLACES)




DETAIL EN

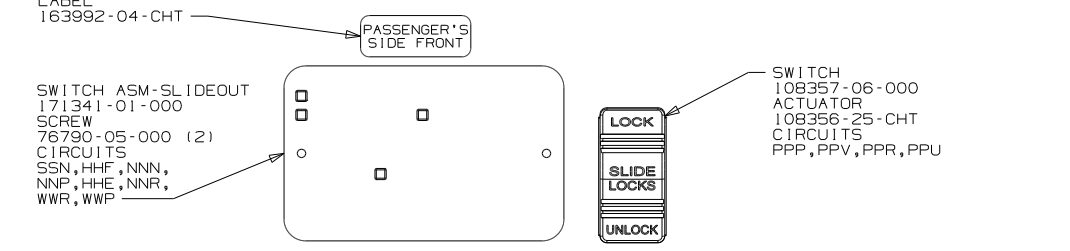



DETAIL EC




DETAIL EH




DETAIL EP

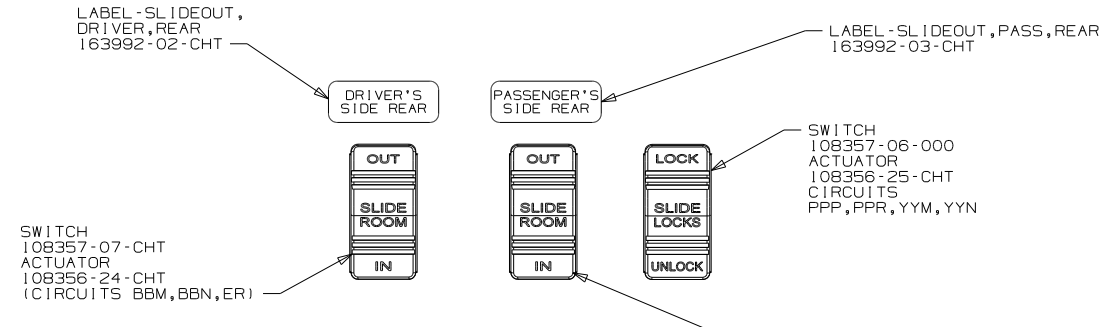



DETAIL ED




DETAIL EJ

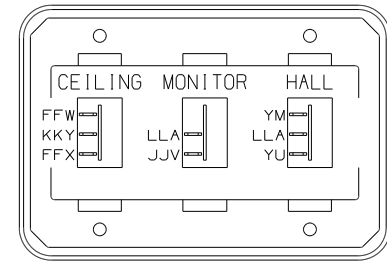


DETAIL ER

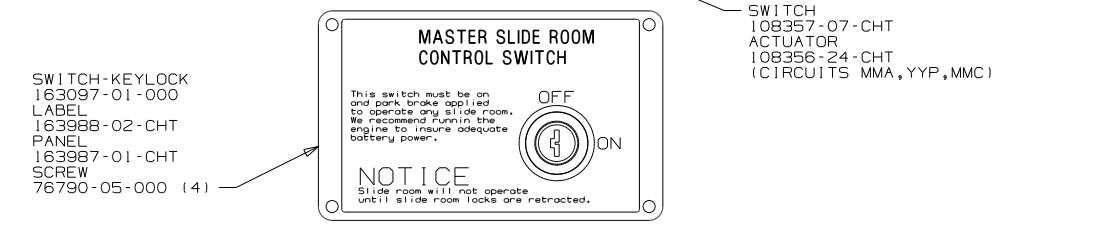


DETAIL EE



DETAIL EK



DETAIL ES

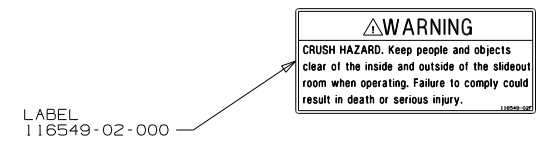


DETAIL EL

- 41Y FAN - CEILING, BEDROOM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


|                        |                      |
|------------------------|----------------------|
| FIRST USED             | 11 P40U              |
| TITLE                  | DO NOT SCALE DRAWING |
| WIRING INSTL-BODY, 12V |                      |
| SHEET 5                | PART NO 175293       |
|                        | REV                  |

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

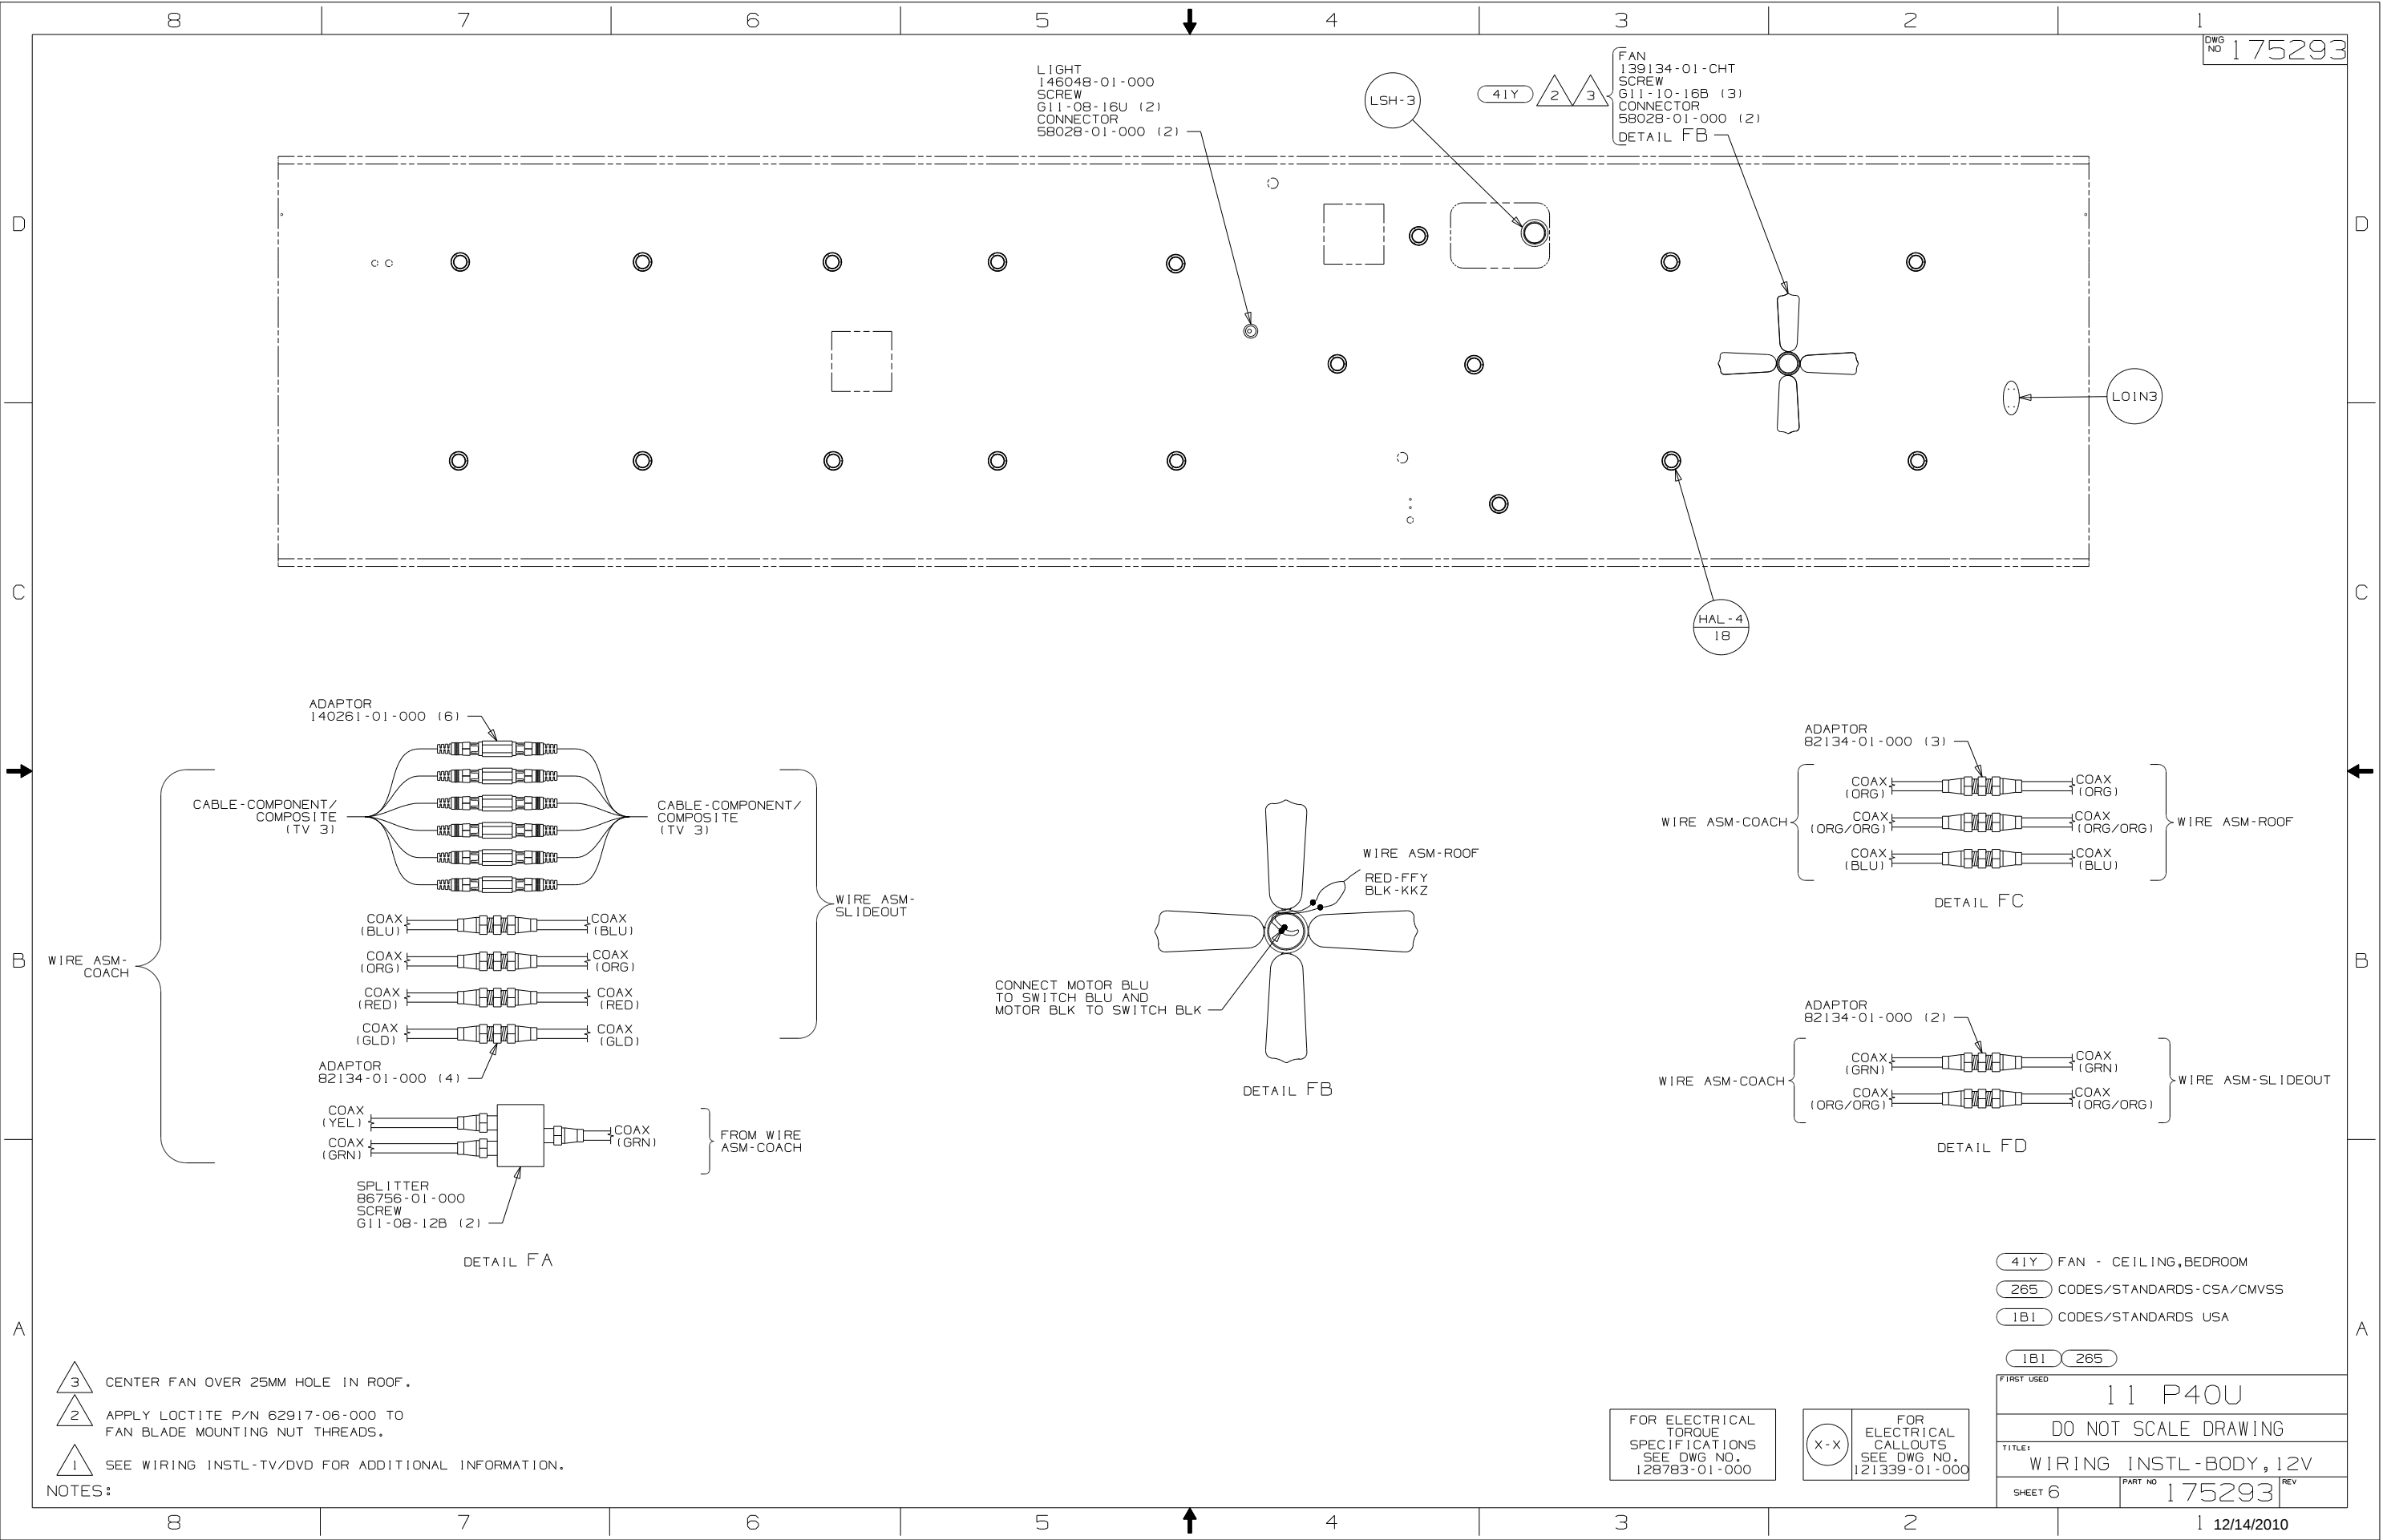

THE SATELLITE DISH WIRE CONNECTIONS ARE TO BE PLACED ON THE CENTERLINE OF THE MOTORHOME FACING FORWARD





CONNECT CABLE ASM SATELLITE CONTROL FROM ROOF ASM TO SATELLITE DISH HERE

CONNECT 9" CABLE ASM COAX (REAR TV ORG/ORG) FROM ROOF ASM TO AUX INPUT ON SATELLITE DISH





CONNECT 8" CABLE ASM COAX (FRONT TV ORG) FROM ROOF ASM TO MAIN INPUT ON SATELLITE DISH

VIEW GB-GB

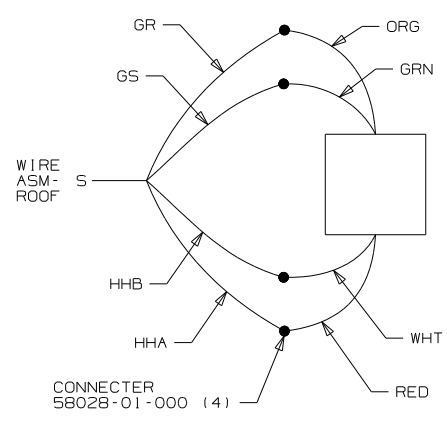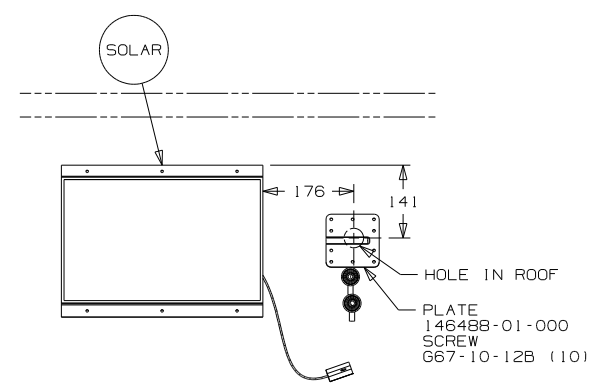

DETAIL GF

WIRING DETAIL GF

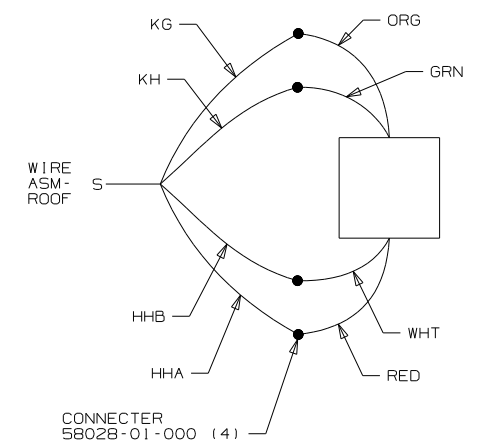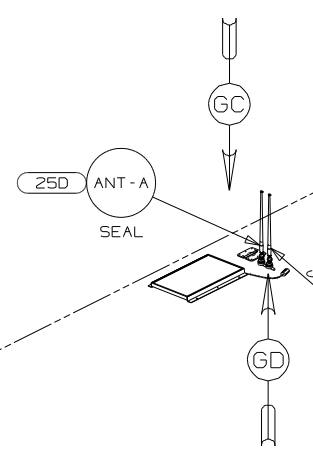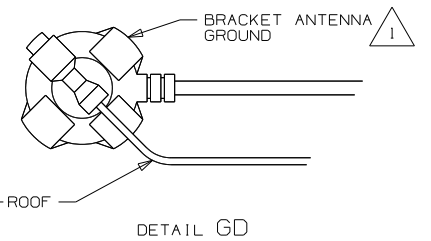

DETAIL GG


- NOTES:
- 5 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.
  - 4 FASTEN TO VENT.
  - 3 REMOVE ALL SHIPPING RESTRAINTS AND FIRMLY INSERT THE SUPPLIED PLUGS INTO THE APPROPRIATE SIZED HOLES AS SPECIFIED IN THE INSTALLATION PROCESS.
  - 2 SEE MANUFACTURER'S INSTALLATION FOR ADDITIONAL INFORMATION.
  - 1 WRAP BRACKET LEGS AROUND ANTENNA BASE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000





FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 193 TV ANTENNA-AMPLIFIED SYSTEM
- 48P SAT TV SYSTEM IN-MOTION
- 290 SOLAR PANEL - 10 WATT
- 250 STEREO SYSTEM/W/CD/DVD REAR
- 103 ENTERTAIN CENTR/EXT TV-DVD
- 78K SATELLITE DISH-AUTOMATIC
- 265 CODES/STANDARDS-CSA/CMVSS
- 181 CODES/STANDARDS USA



|            |         |                        |     |
|------------|---------|------------------------|-----|
| FIRST USED |         | 11 P40U                |     |
|            |         | DO NOT SCALE DRAWING   |     |
| TITLE:     |         | WIRING INSTL-BODY, 12V |     |
| SHEET 7    | PART NO | 175293                 | REV |

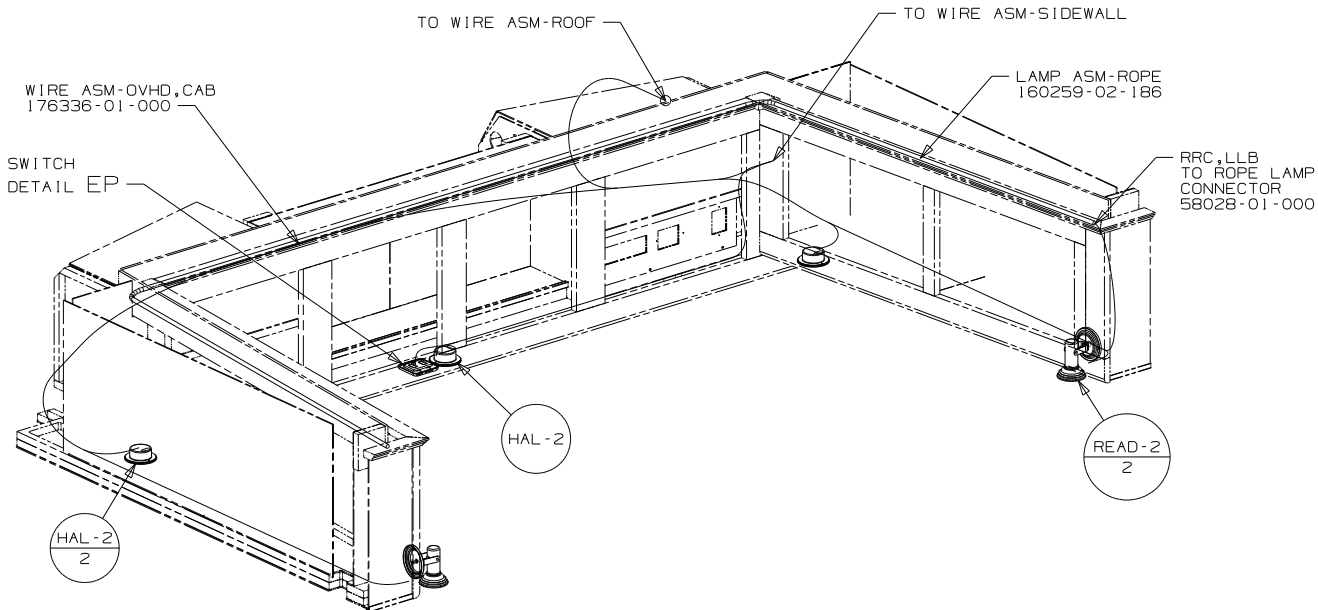

SOLAR PANEL LIGHT  
115505-01-000

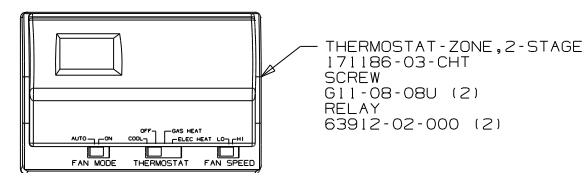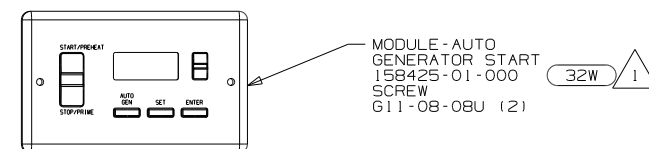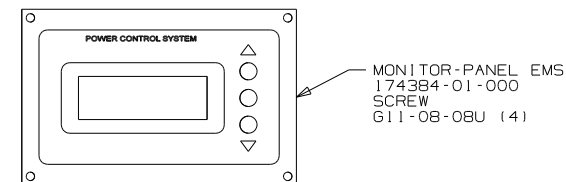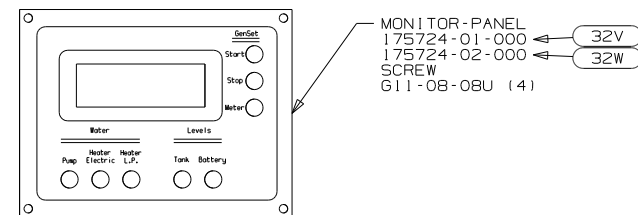

TEMP SENSOR  
171186-02-000  
SCREW  
667-06-10T (2)  
(CONNECTS TO  
CIRCUITS TTG & TTH)



DETAIL HA

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

61E TV(FRONT)-26" COLOR STEREO  
32V GENERATOR-START,AUTO SYS W/O  
32W GENERATOR-START,AUTO SYSTEM  
265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

1B1 265

FIRST USED  
11 P40U  
DO NOT SCALE DRAWING  
TITLE:  
WIRING INSTL-BODY,12V  
SHEET 8 PART NO 175293 REV

2 SET 'BAT TYPE' TO 'AGM2'.  
SET 'LBCO' TO '11VDC'.  
SEE OWNER'S MANUAL FOR SETUP PROCEDURE.

1 SET 'GEN TYPE' TO MATCH GENERATOR MODEL INSTALLED IN COACH.  
SET 'SAFETY TYPE' TO 'IGNITION'.  
SEE OWNER'S MANUAL FOR SETUP PROCEDURE.

NOTES:

12/14/2010