




DANGER




Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

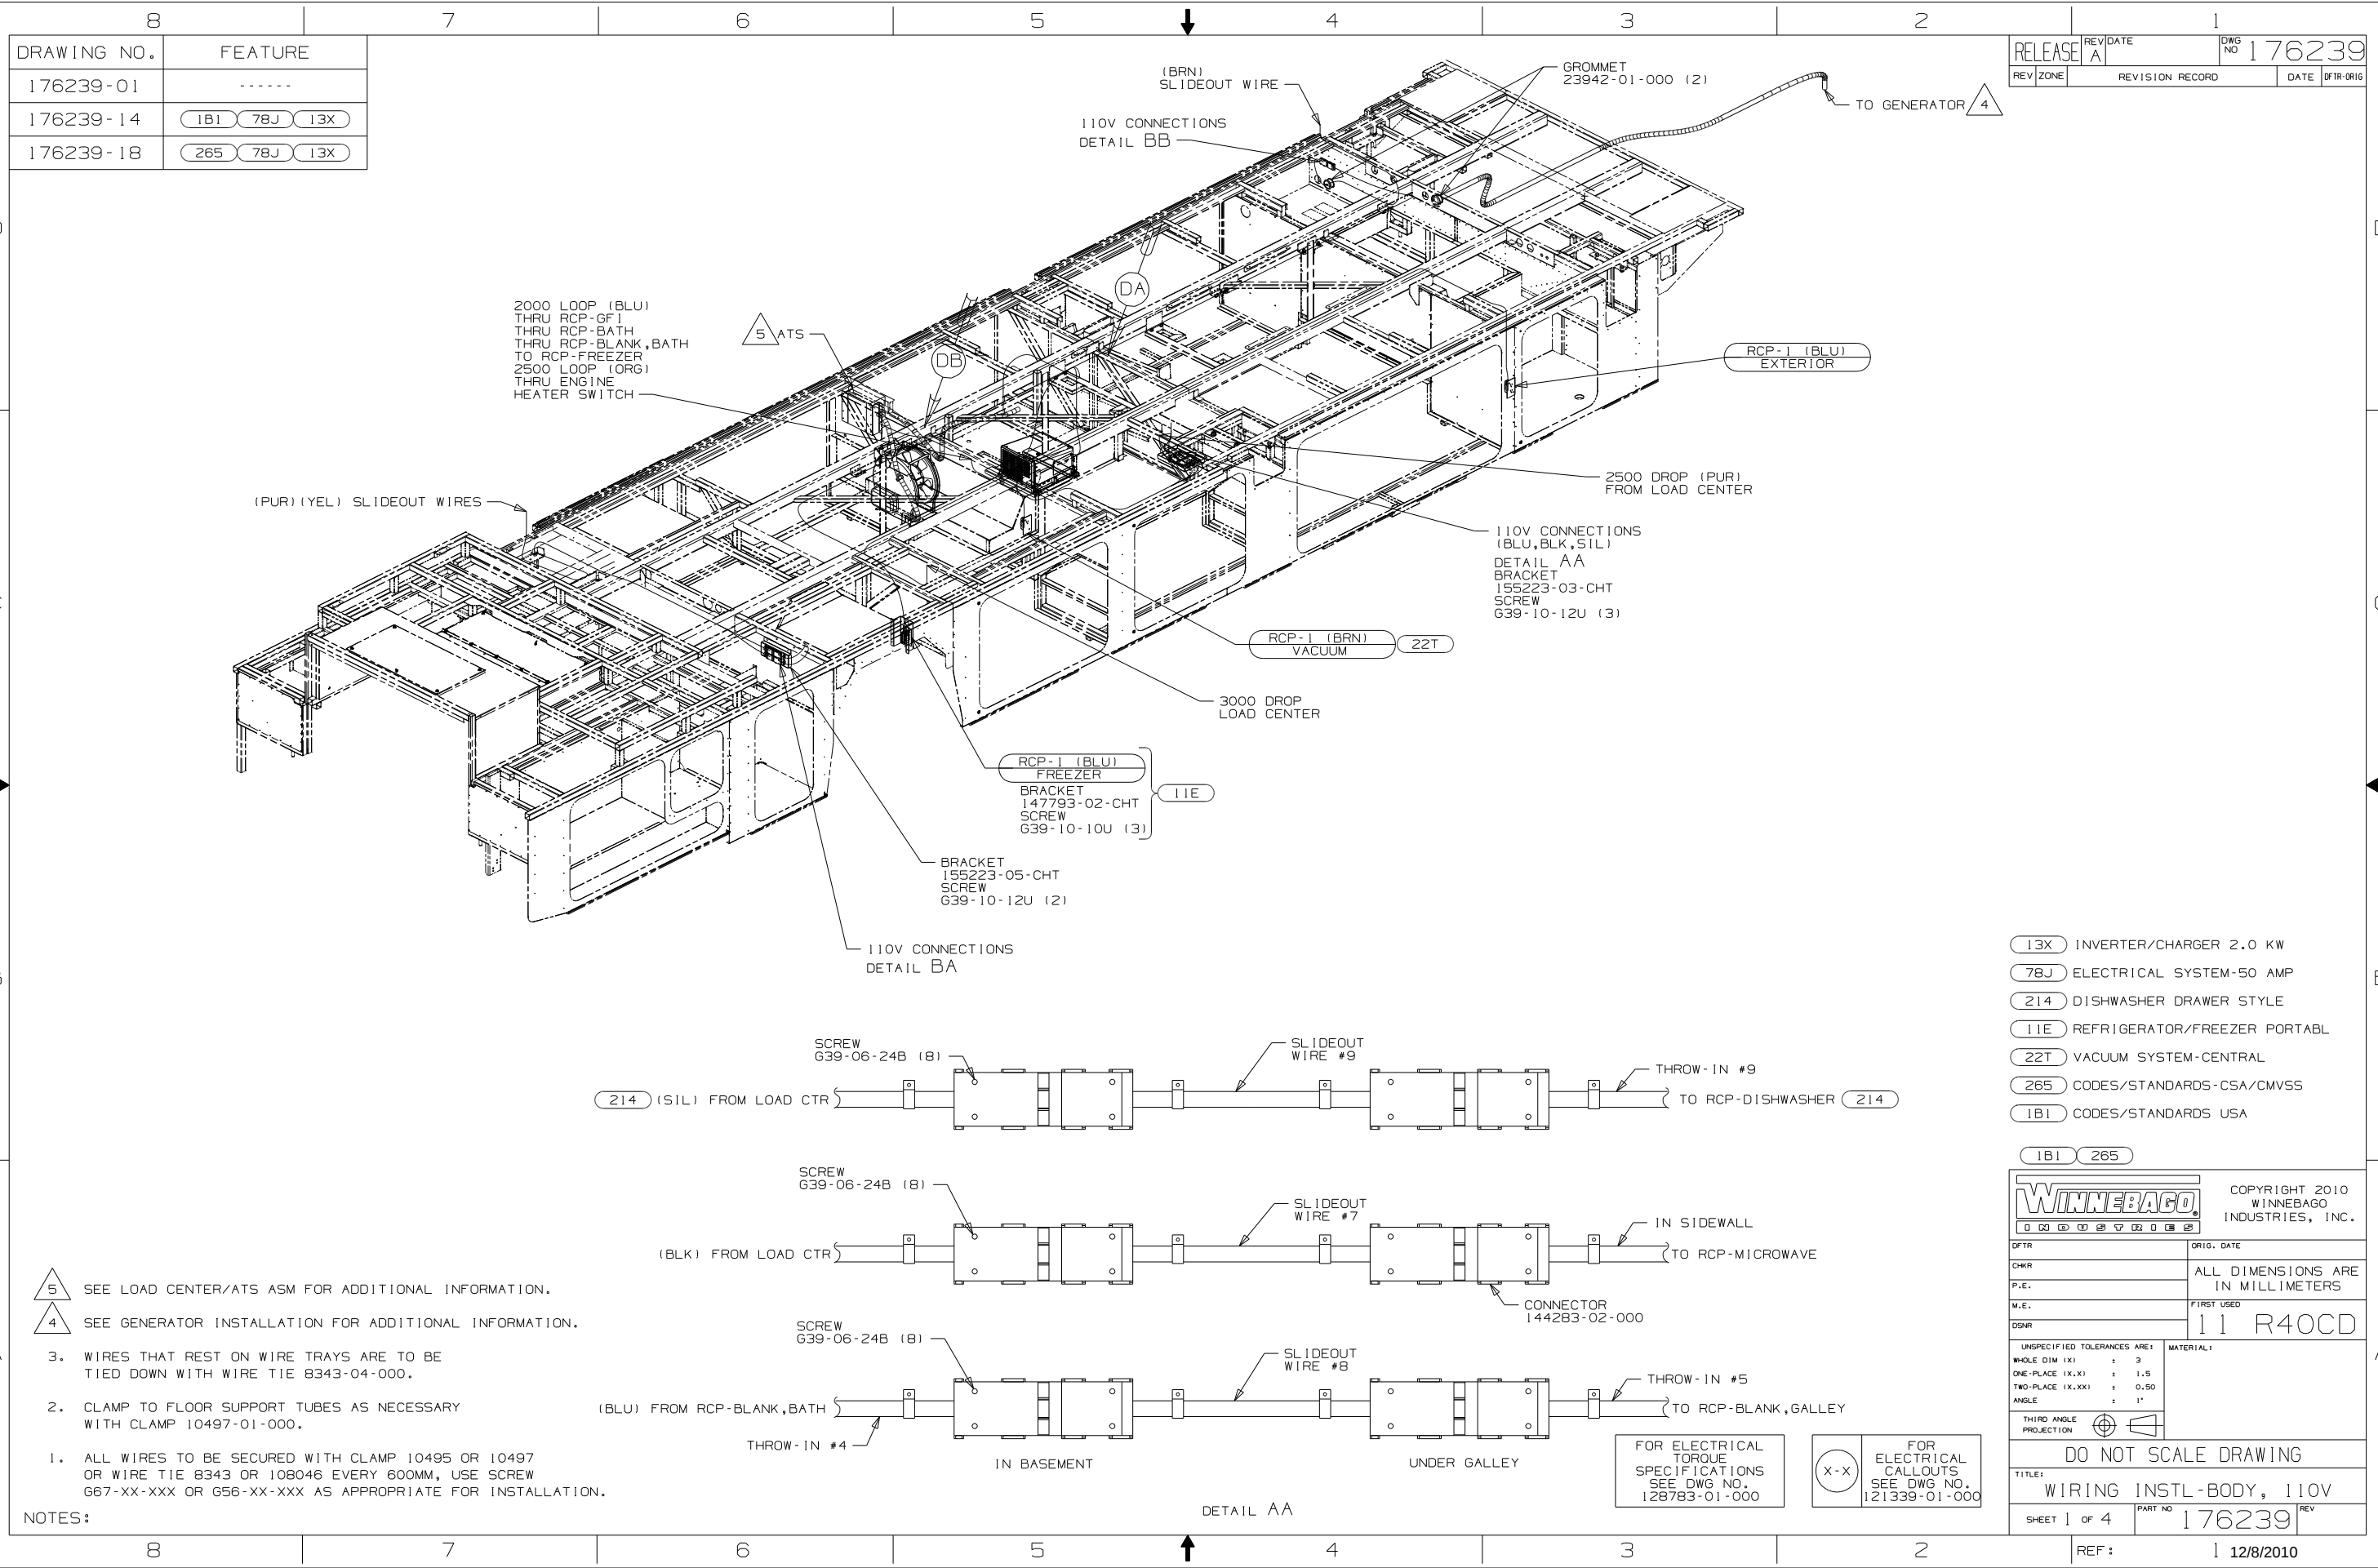

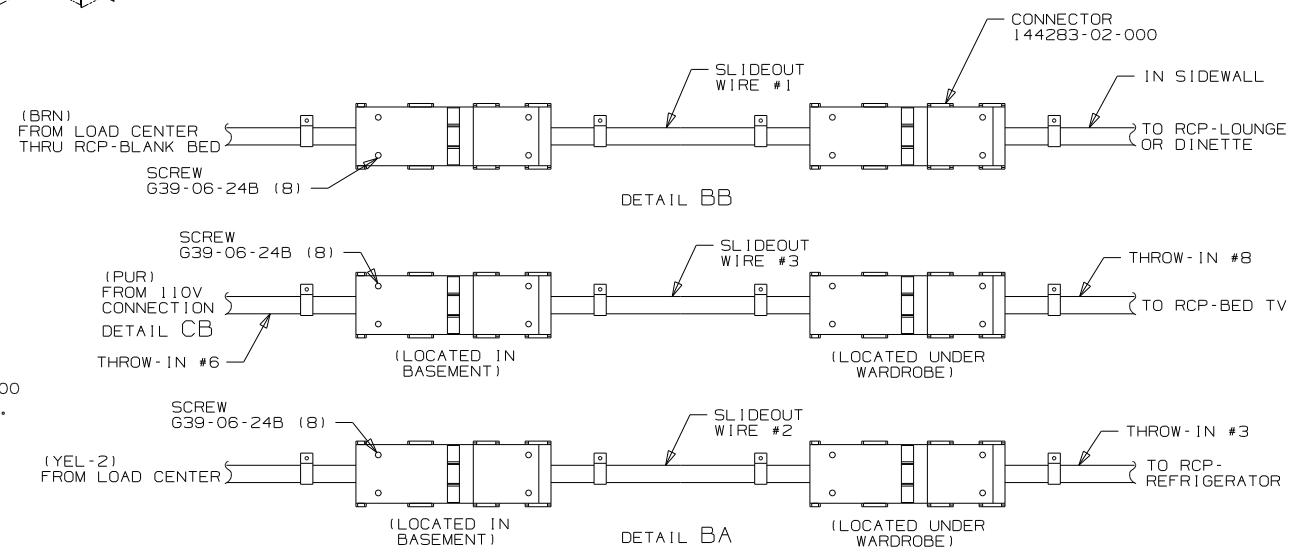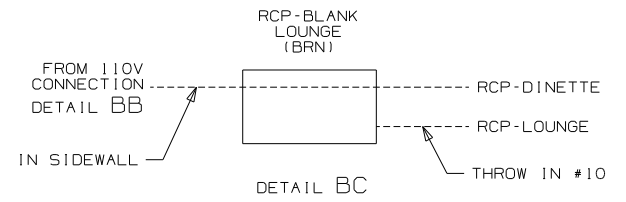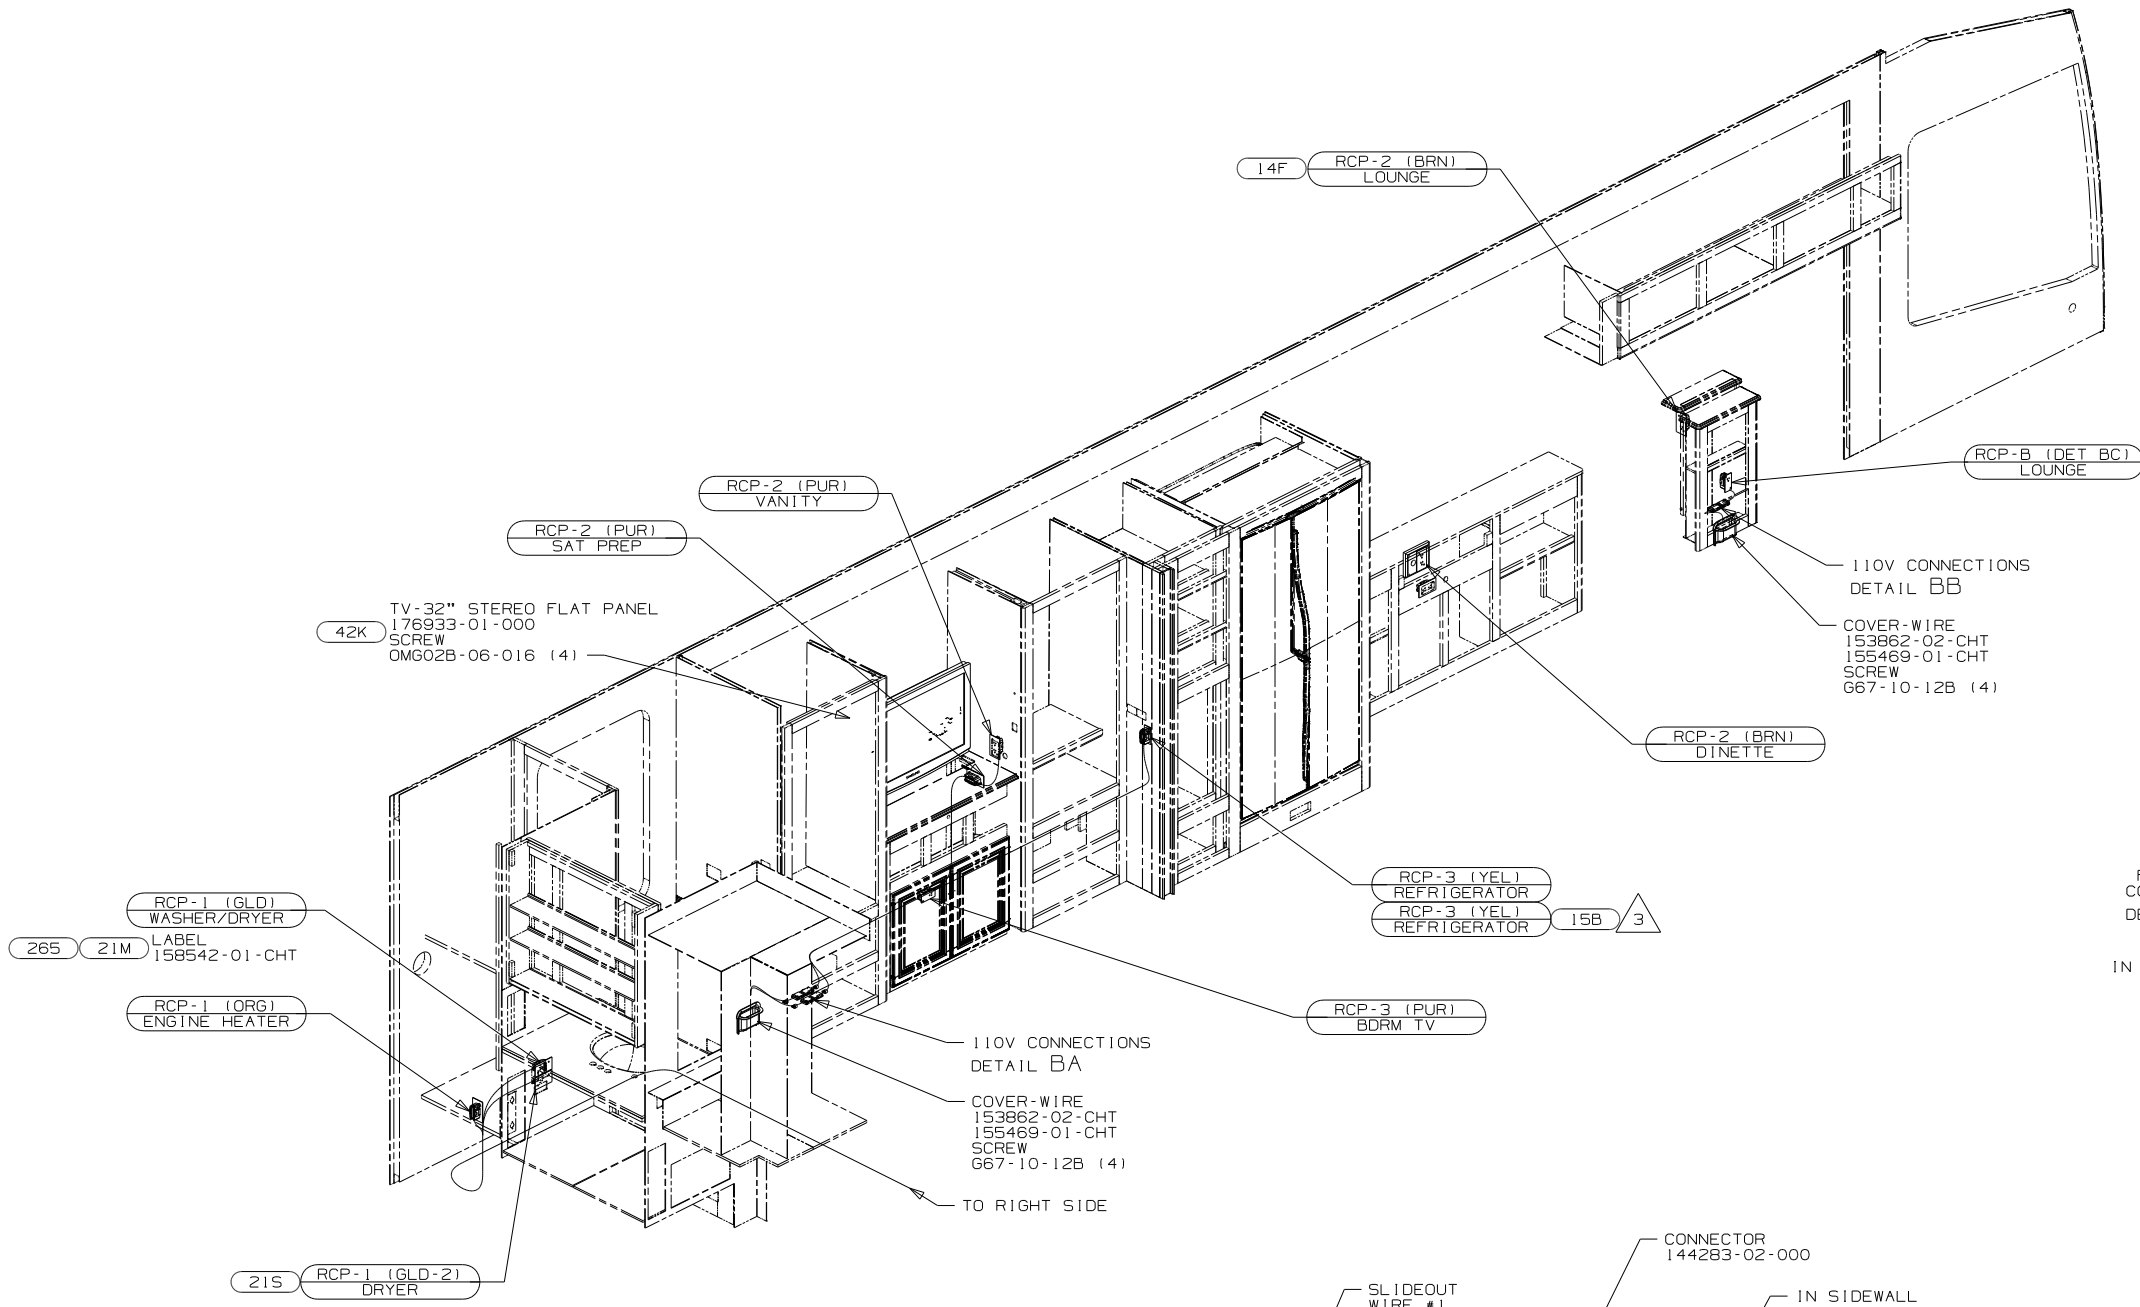

- NOTES:
- REFRIGERATOR REQUIRES 2 RECEPTACLES.
 - ALL 110V WIRES TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200mm OF OUTLET BOXES, USE SCREW G67-10-12B.
 - ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.


- 14F LOUNGE CHAIRS (2)-WITH TABLE
- 21S WASHER/DRYER STACKED
- 61K TV(REAL)-26" COLOR STEREO
- 15B REFRIG W/ICE/WTR DISP 2-DOOR
- 21M WASHER/DRYER PREP
- 26S CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1B1		265	
FIRST USED			
11 R40CD			
DO NOT SCALE DRAWING			
TITLE:			
WIRING INSTL-BODY, 110V			
SHEET 2		PART NO	176239
			REV

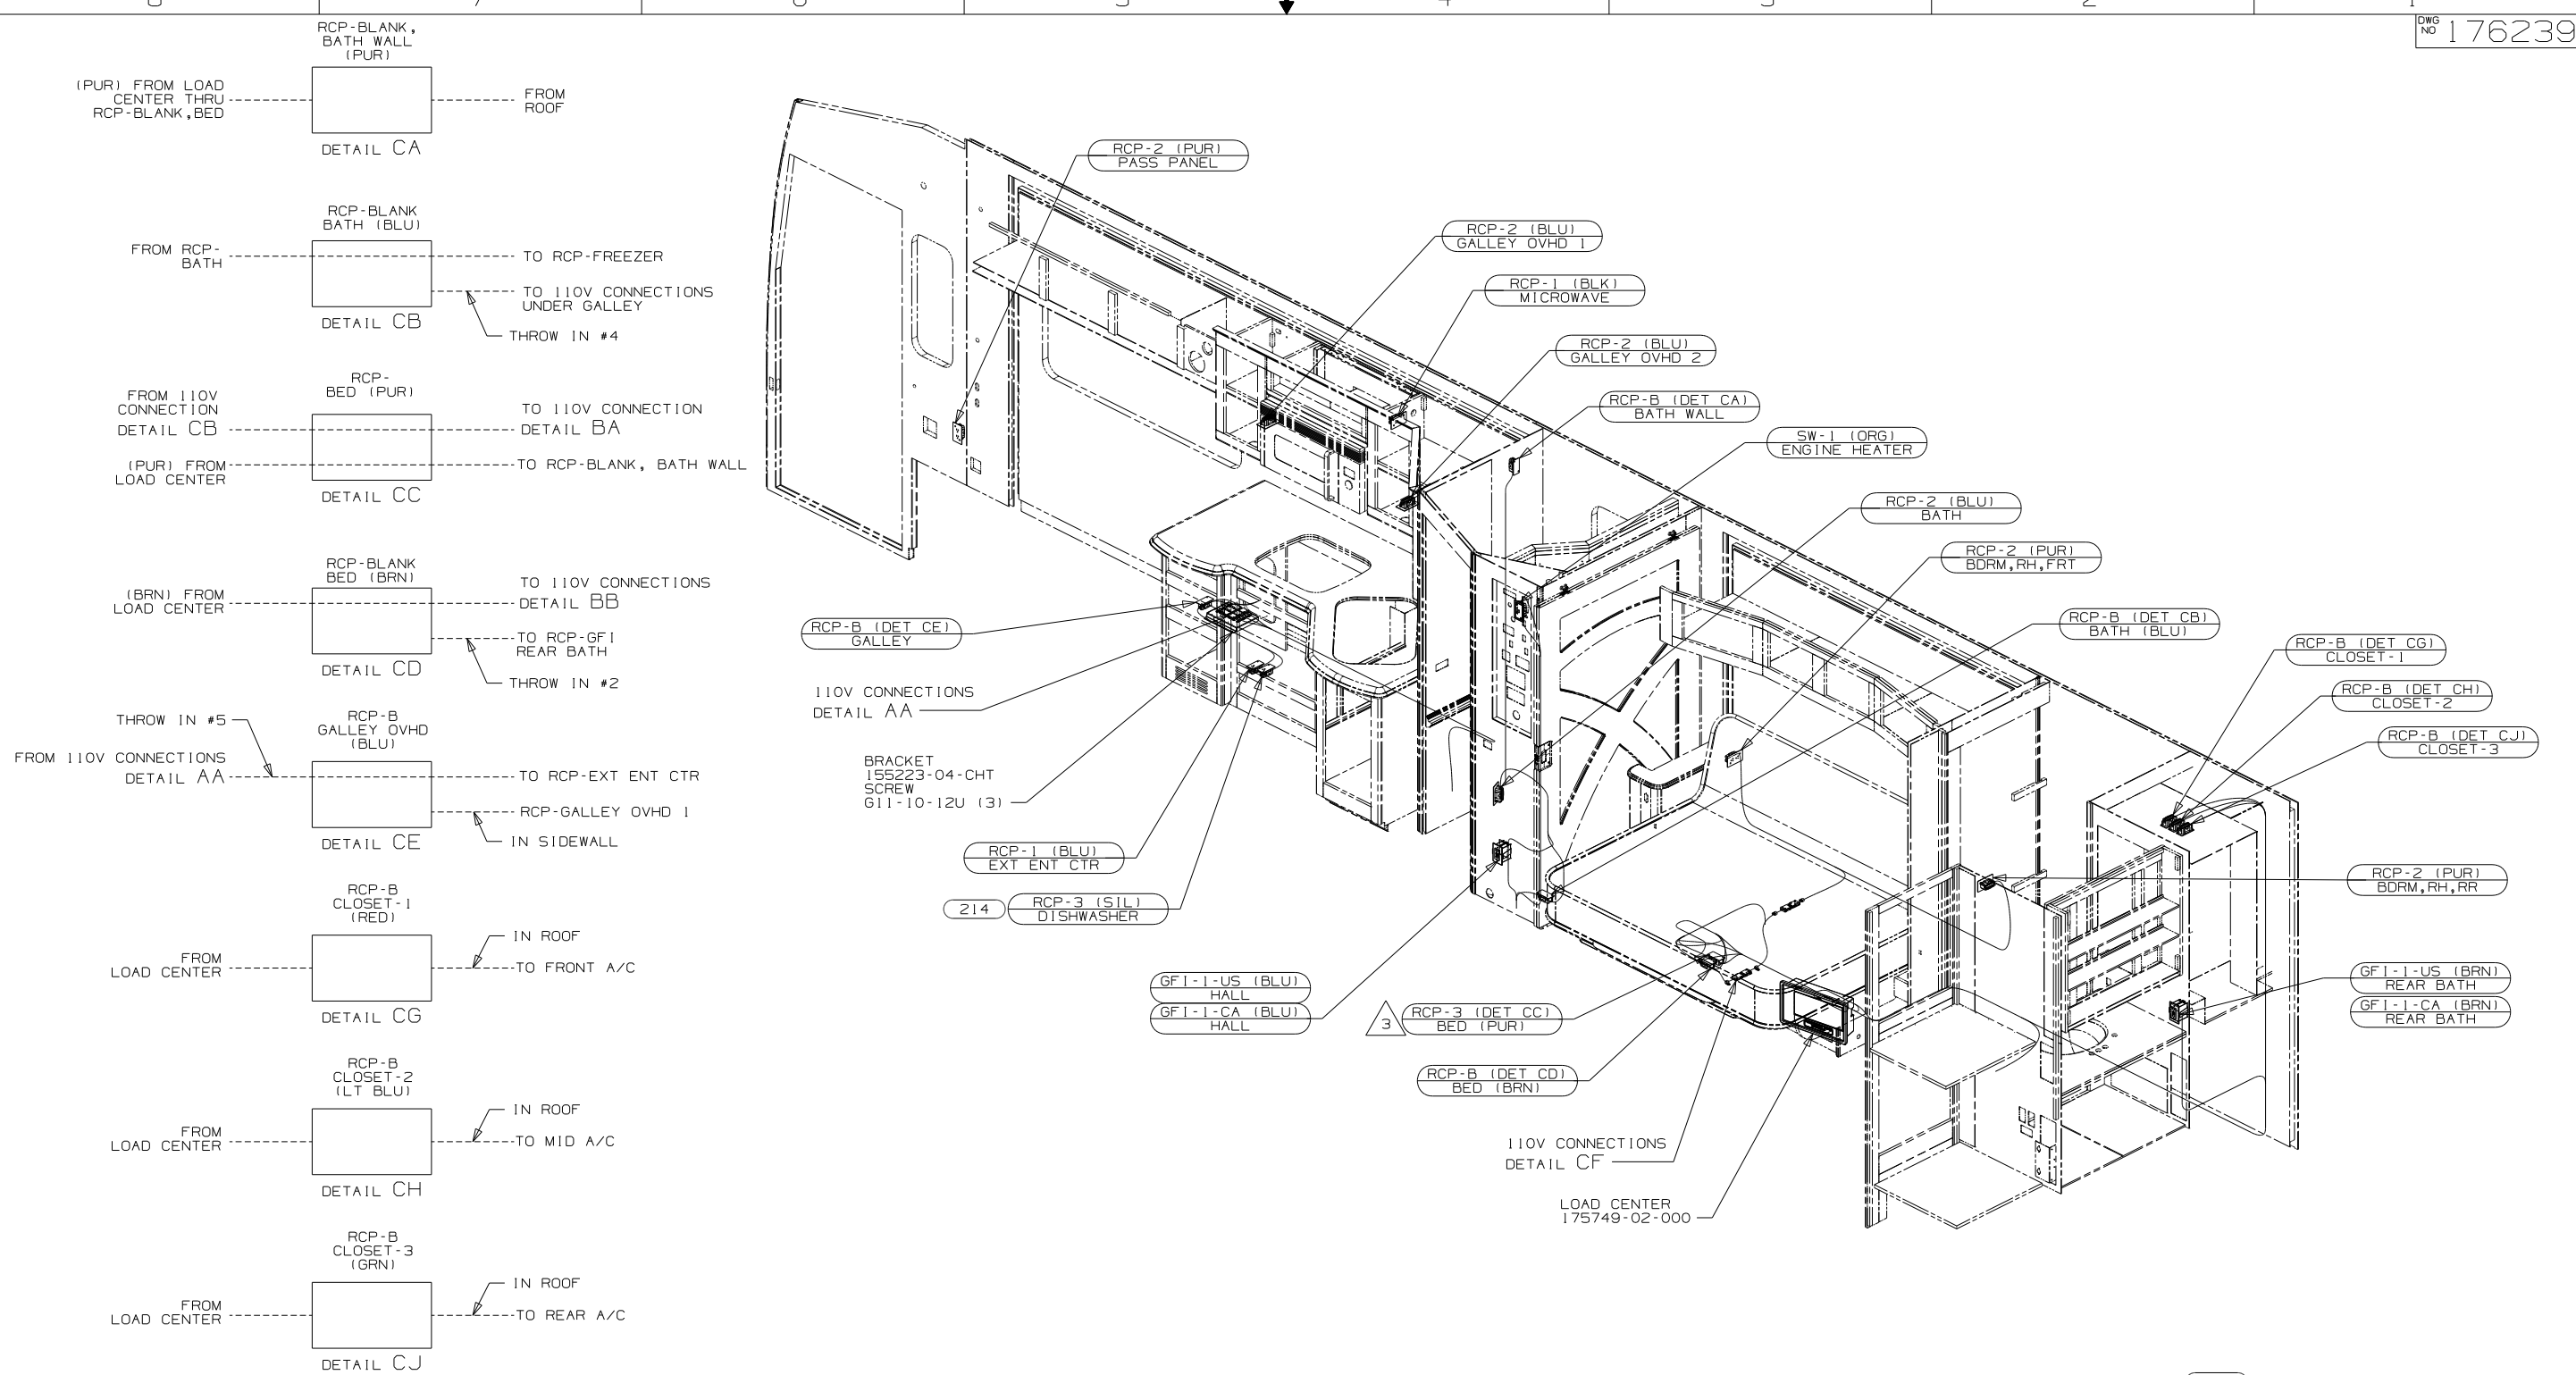

- 3 MATTRESS AIR PUMP PLUGS INTO THIS RCP.
2. ALL 110V WIRES TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200mm OF OUTLET BOXES, USE SCREW G67-10-12B.
 1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

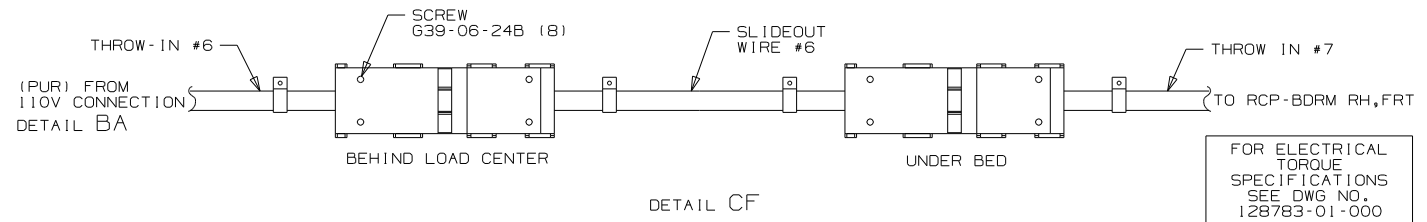


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

214	DISHWASHER DRAWER STYLE
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265


FIRST USED	
11 R40CD	
DO NOT SCALE DRAWING	
TITLE:	
WIRING INSTL-BODY, 110V	
SHEET 3	PART NO 176239
	REV

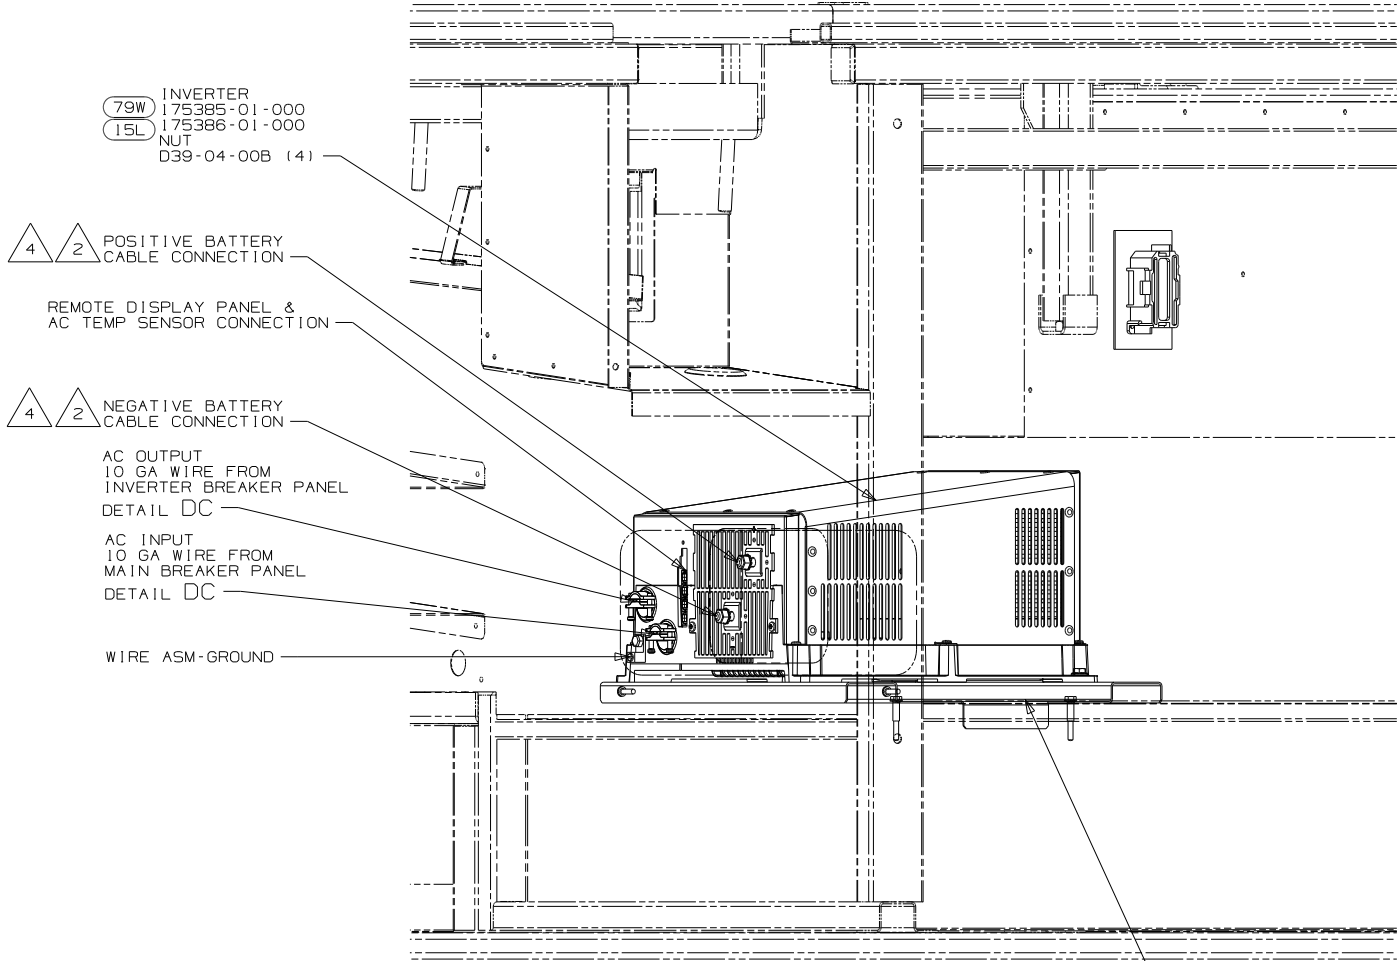

VIEW DA

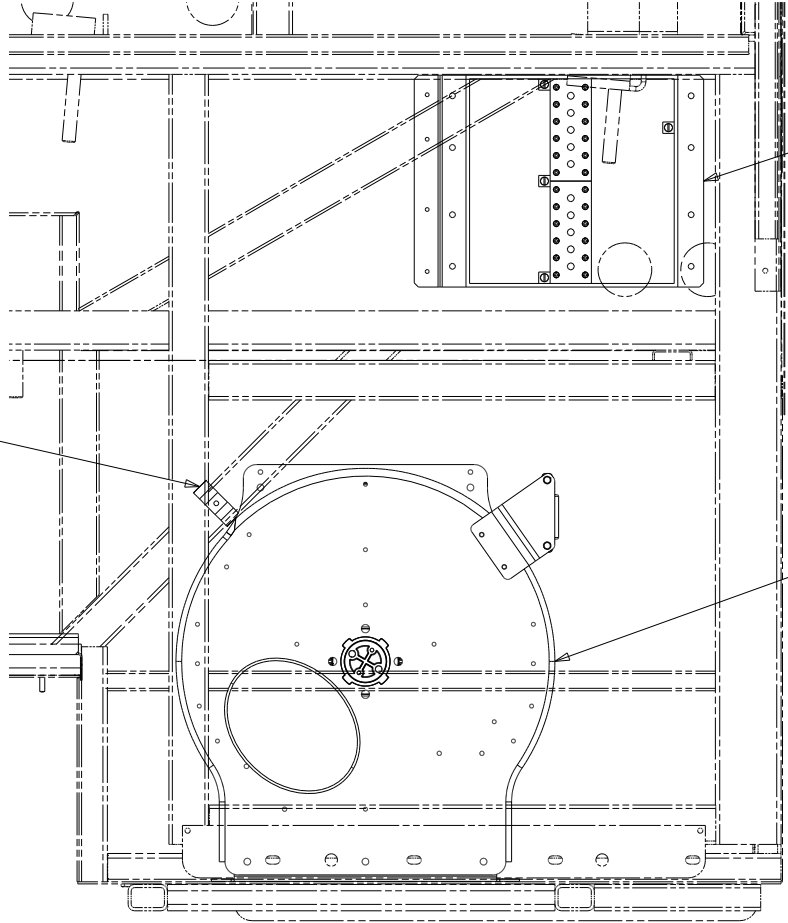

VIEW DB 12F

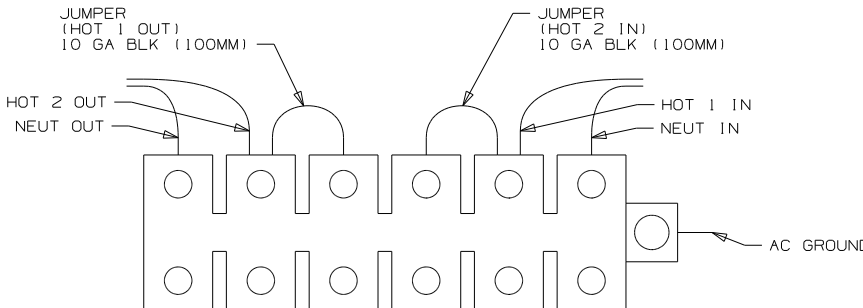

DETAIL DC

- NOTES:
- 4 DO NOT USE POWER/AIR TOOLS TO INSTALL NUTS. TORQUE TO 10-12 FT LBS USING HAND TOOLS.
 - 3 INSERT BOLT FROM BOTTOM OF COMPARTMENT.
 - 2 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
 - 1 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 79W REFRIGERATOR-4 DOOR
- 15L REFR/FRZR 2DOOR RESIDENTIAL
- 12F POWER CORD REEL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		11 R40CD
DO NOT SCALE DRAWING		
TITLE:		WIRING INSTL-BODY, 110V
SHEET 4	PART NO	176239
		REV