




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

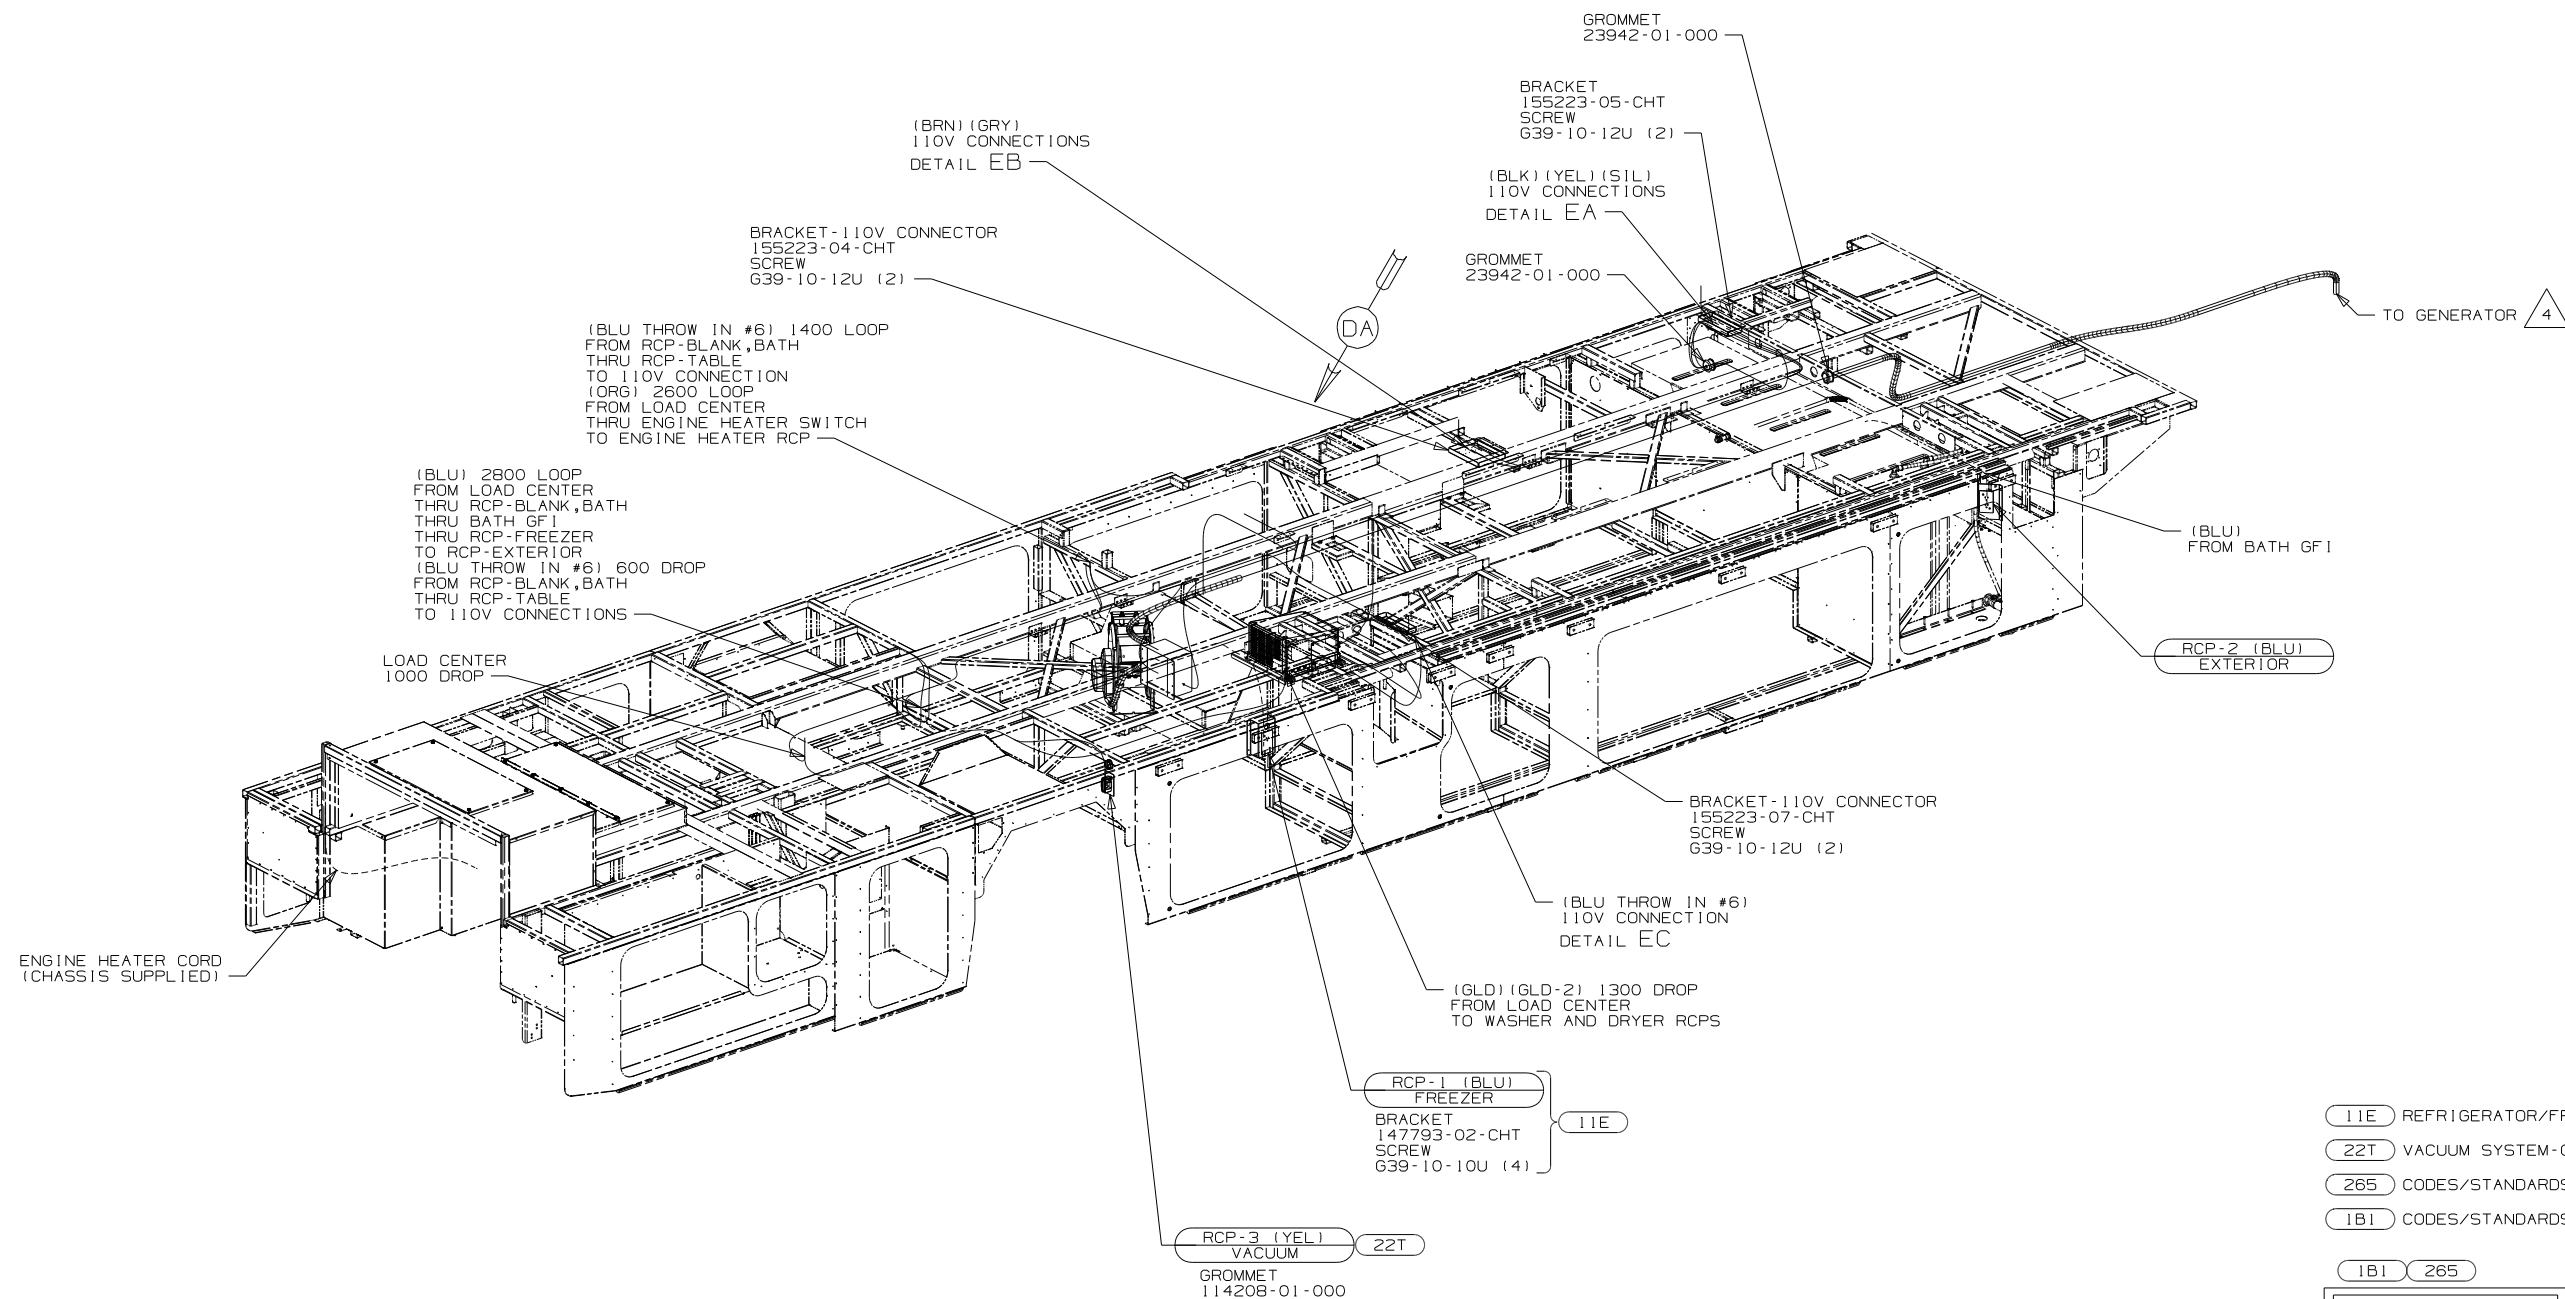

- 11E REFRIGERATOR/FREEZER PORTABLE
- 22T VACUUM SYSTEM-CENTRAL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265



COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFTF	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	
DSNR	FIRST USED 11 R40BD
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X,X)	± 1.5
TWO-PLACE (X,XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	MATERIAL:
	

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-BODY, 110V

SHEET 1 OF 5	PART NO 177151	REV
--------------	----------------	-----

REF :	1 11/2/2010
-------	-------------

4 SEE GENERATOR INSTALLATION FOR ADDITIONAL INFORMATION.


3. WIRES THAT REST ON WIRE TRAYS ARE TO BE TIED DOWN WITH WIRE TIE 8343-04-000.
2. CLAMP TO FLOOR SUPPORT TUBES AS NECESSARY WITH CLAMP 10497-01-000.
1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000




FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

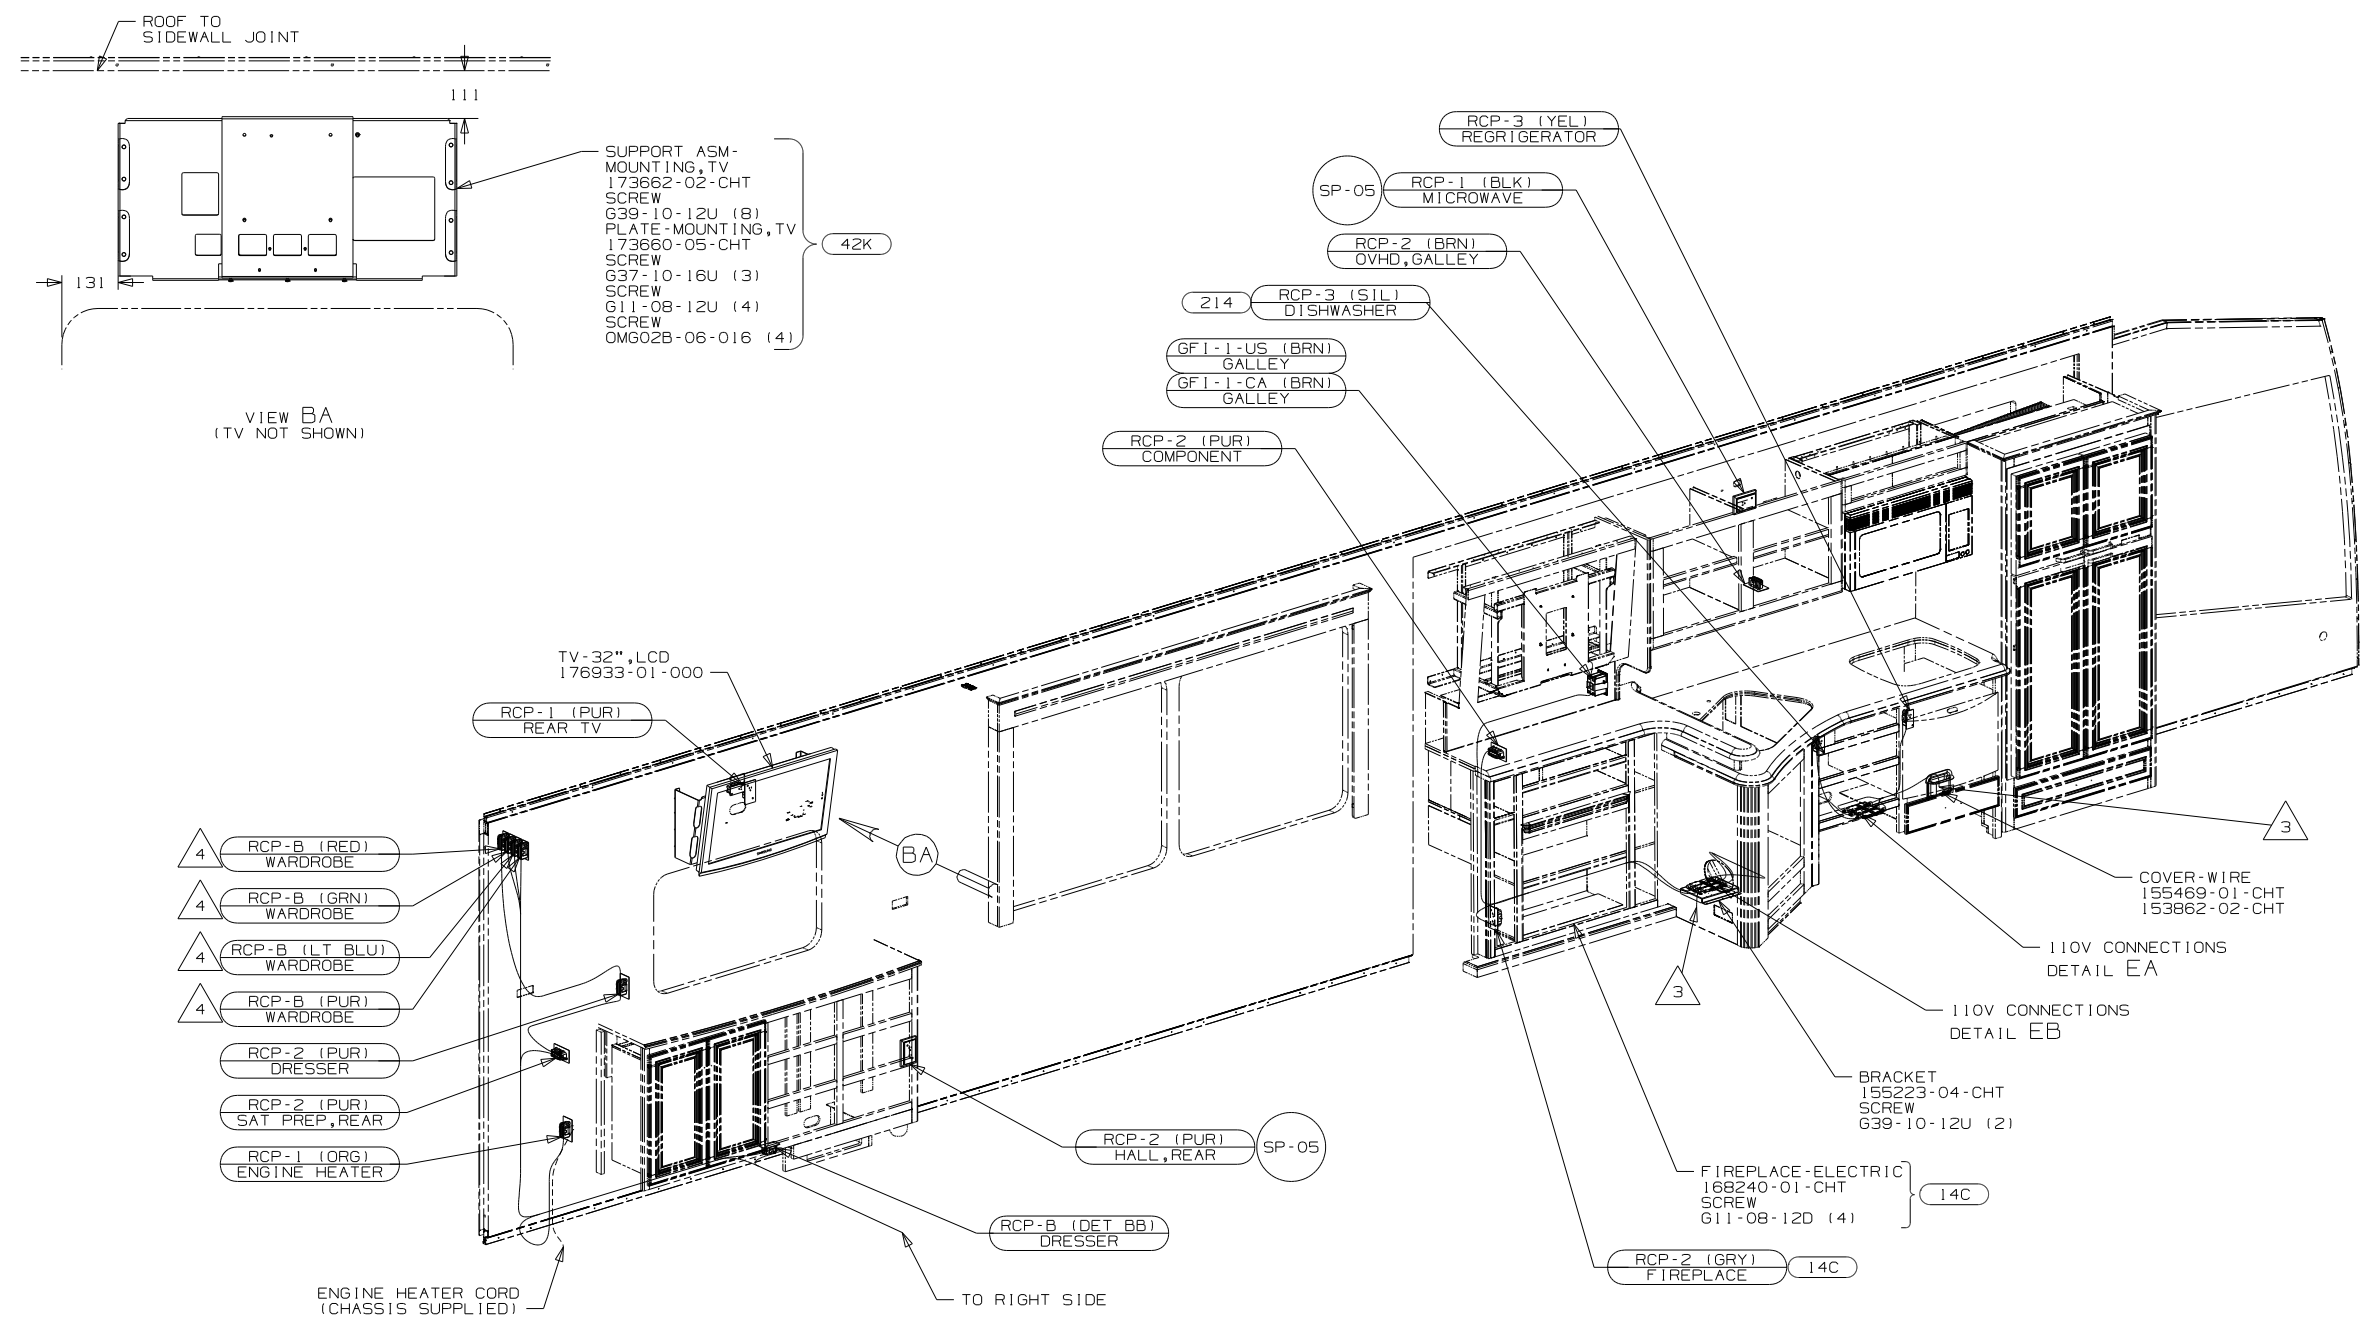

- 4 CONNECTS WIRE FROM ROOF TO COACH WIRING.
- 3 WIRES ROUTE BELOW FLOOR IN THIS AREA.
2. ALL 110V WIRES TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

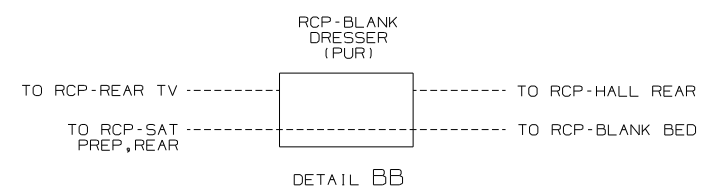



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 214 DISHWASHER DRAWER STYLE
- 42K TV-32" COLOR, STEREO W/REMOTE
- 14C FIREPLACE-ELECTRIC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		11 R40BD
DO NOT SCALE DRAWING		
TITLE:		WIRING INSTL-BODY, 110V
SHEET 2	PART NO	177151
		REV

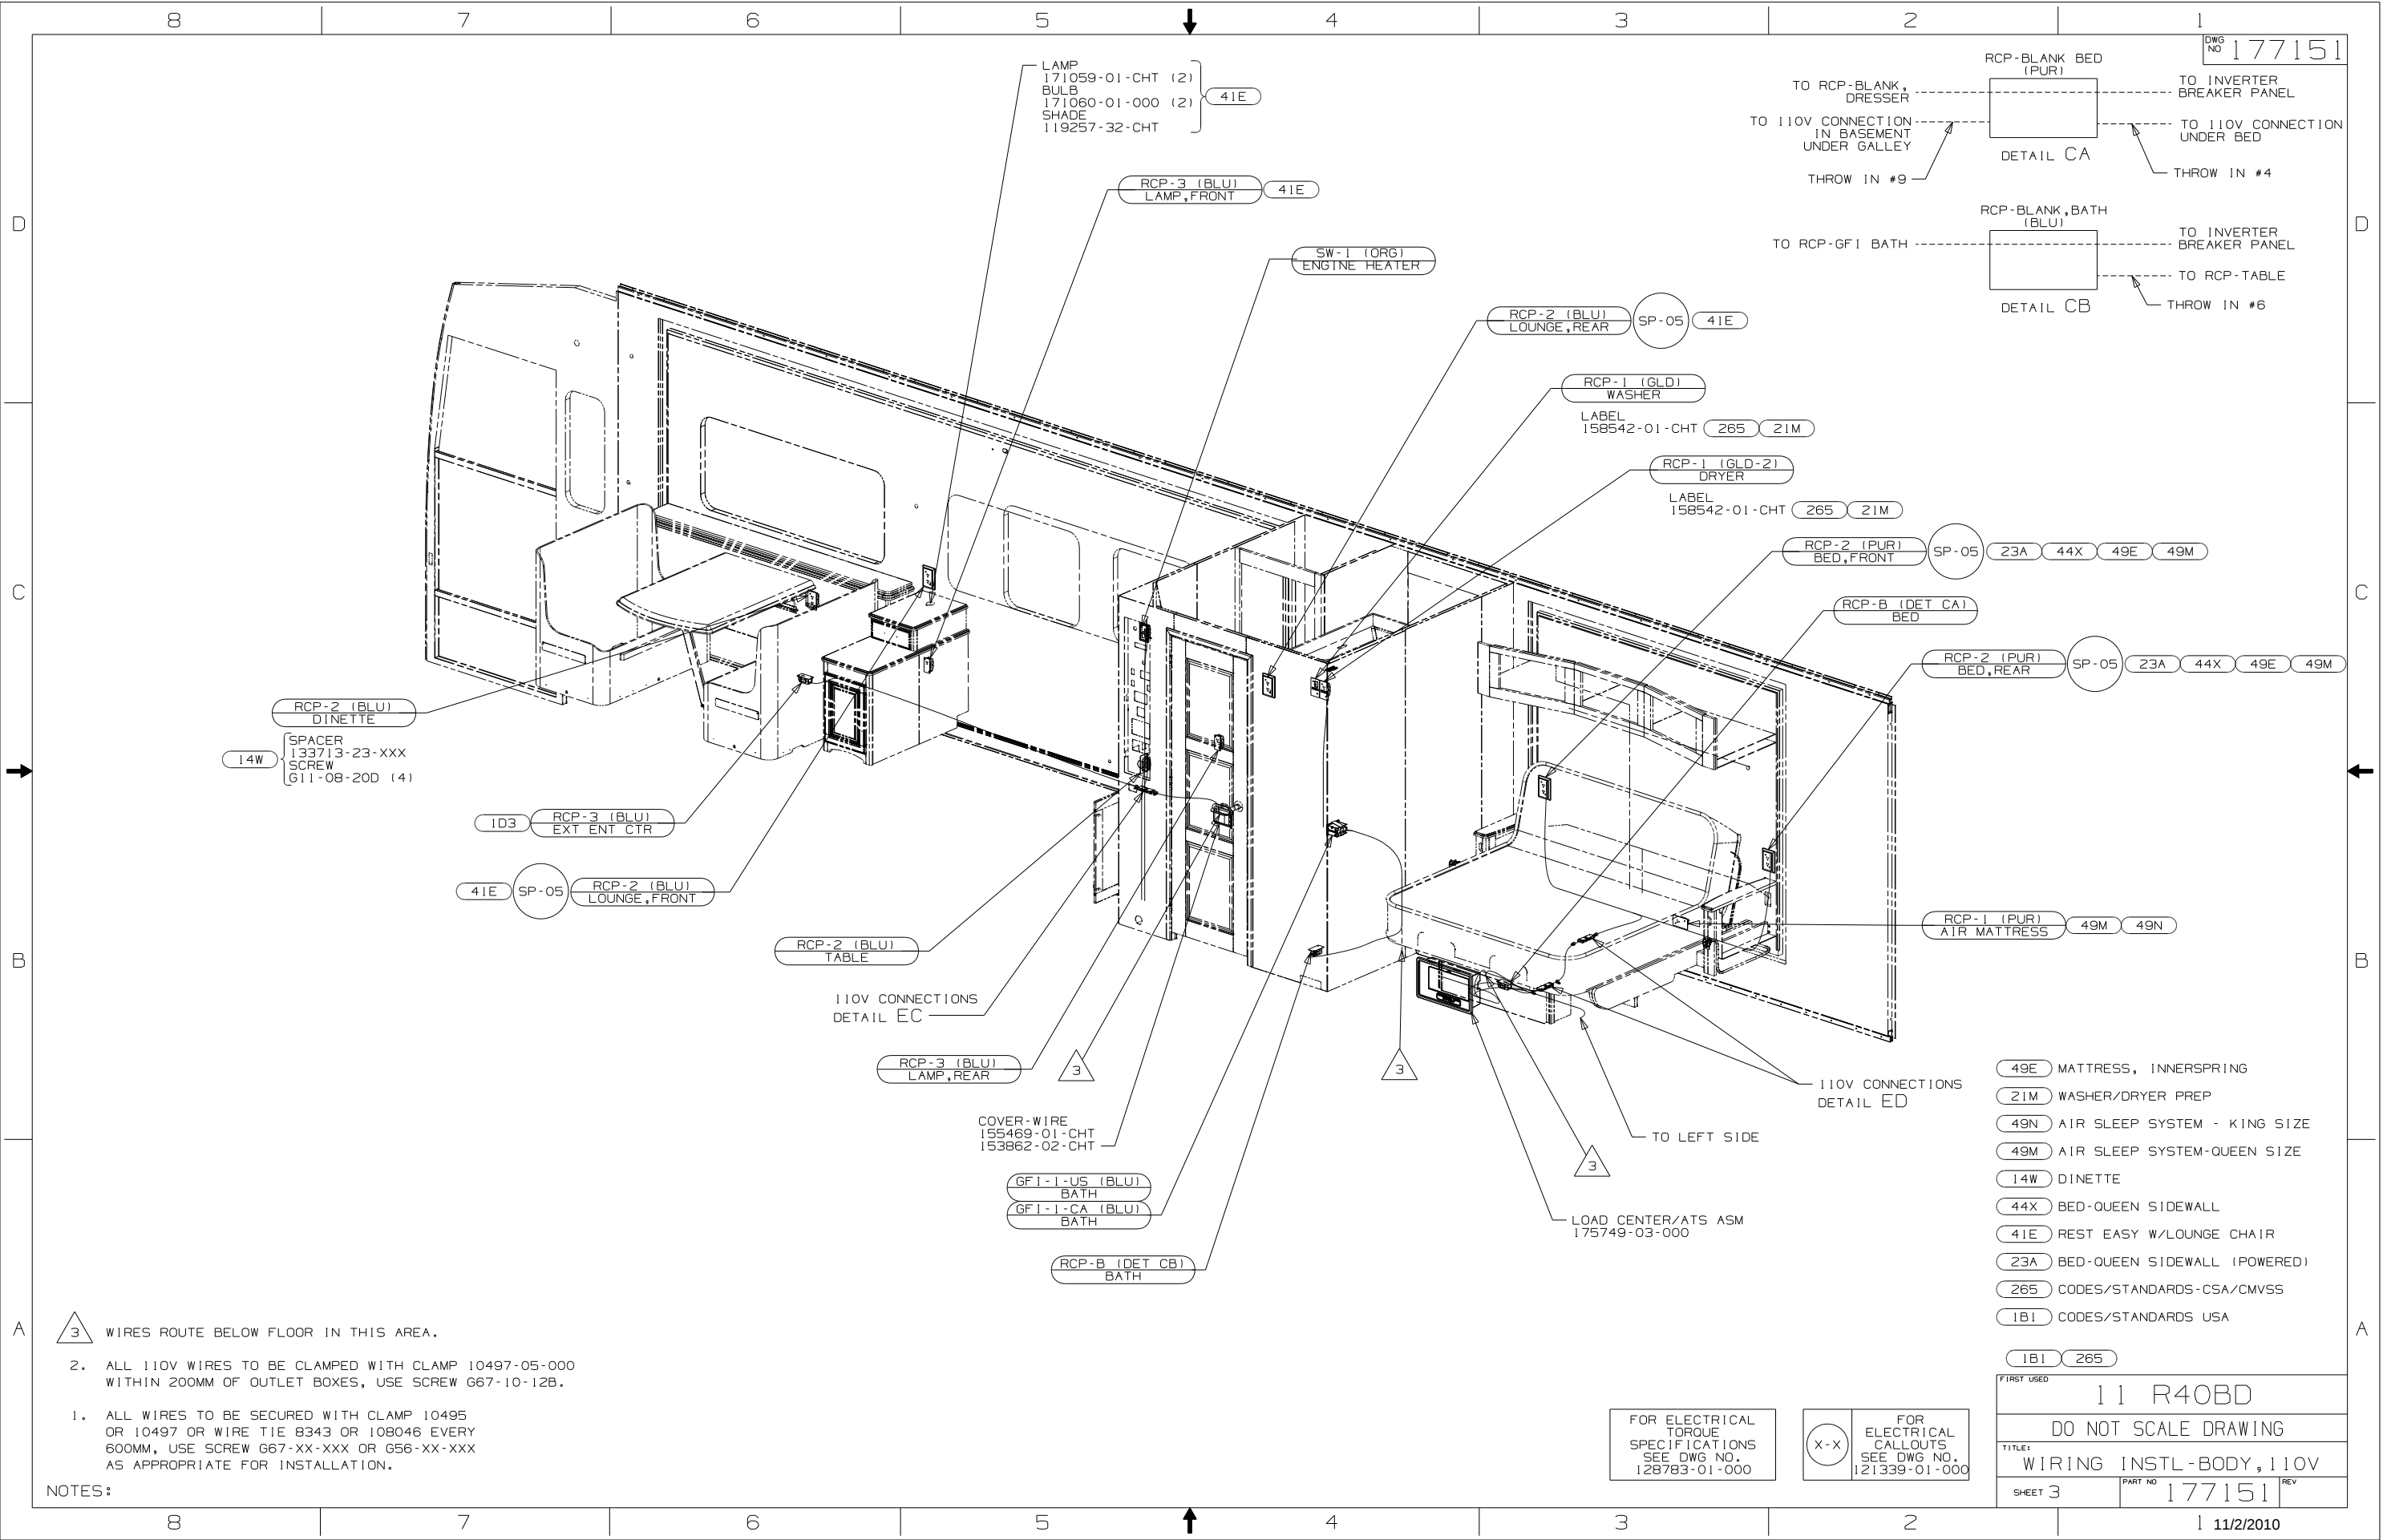

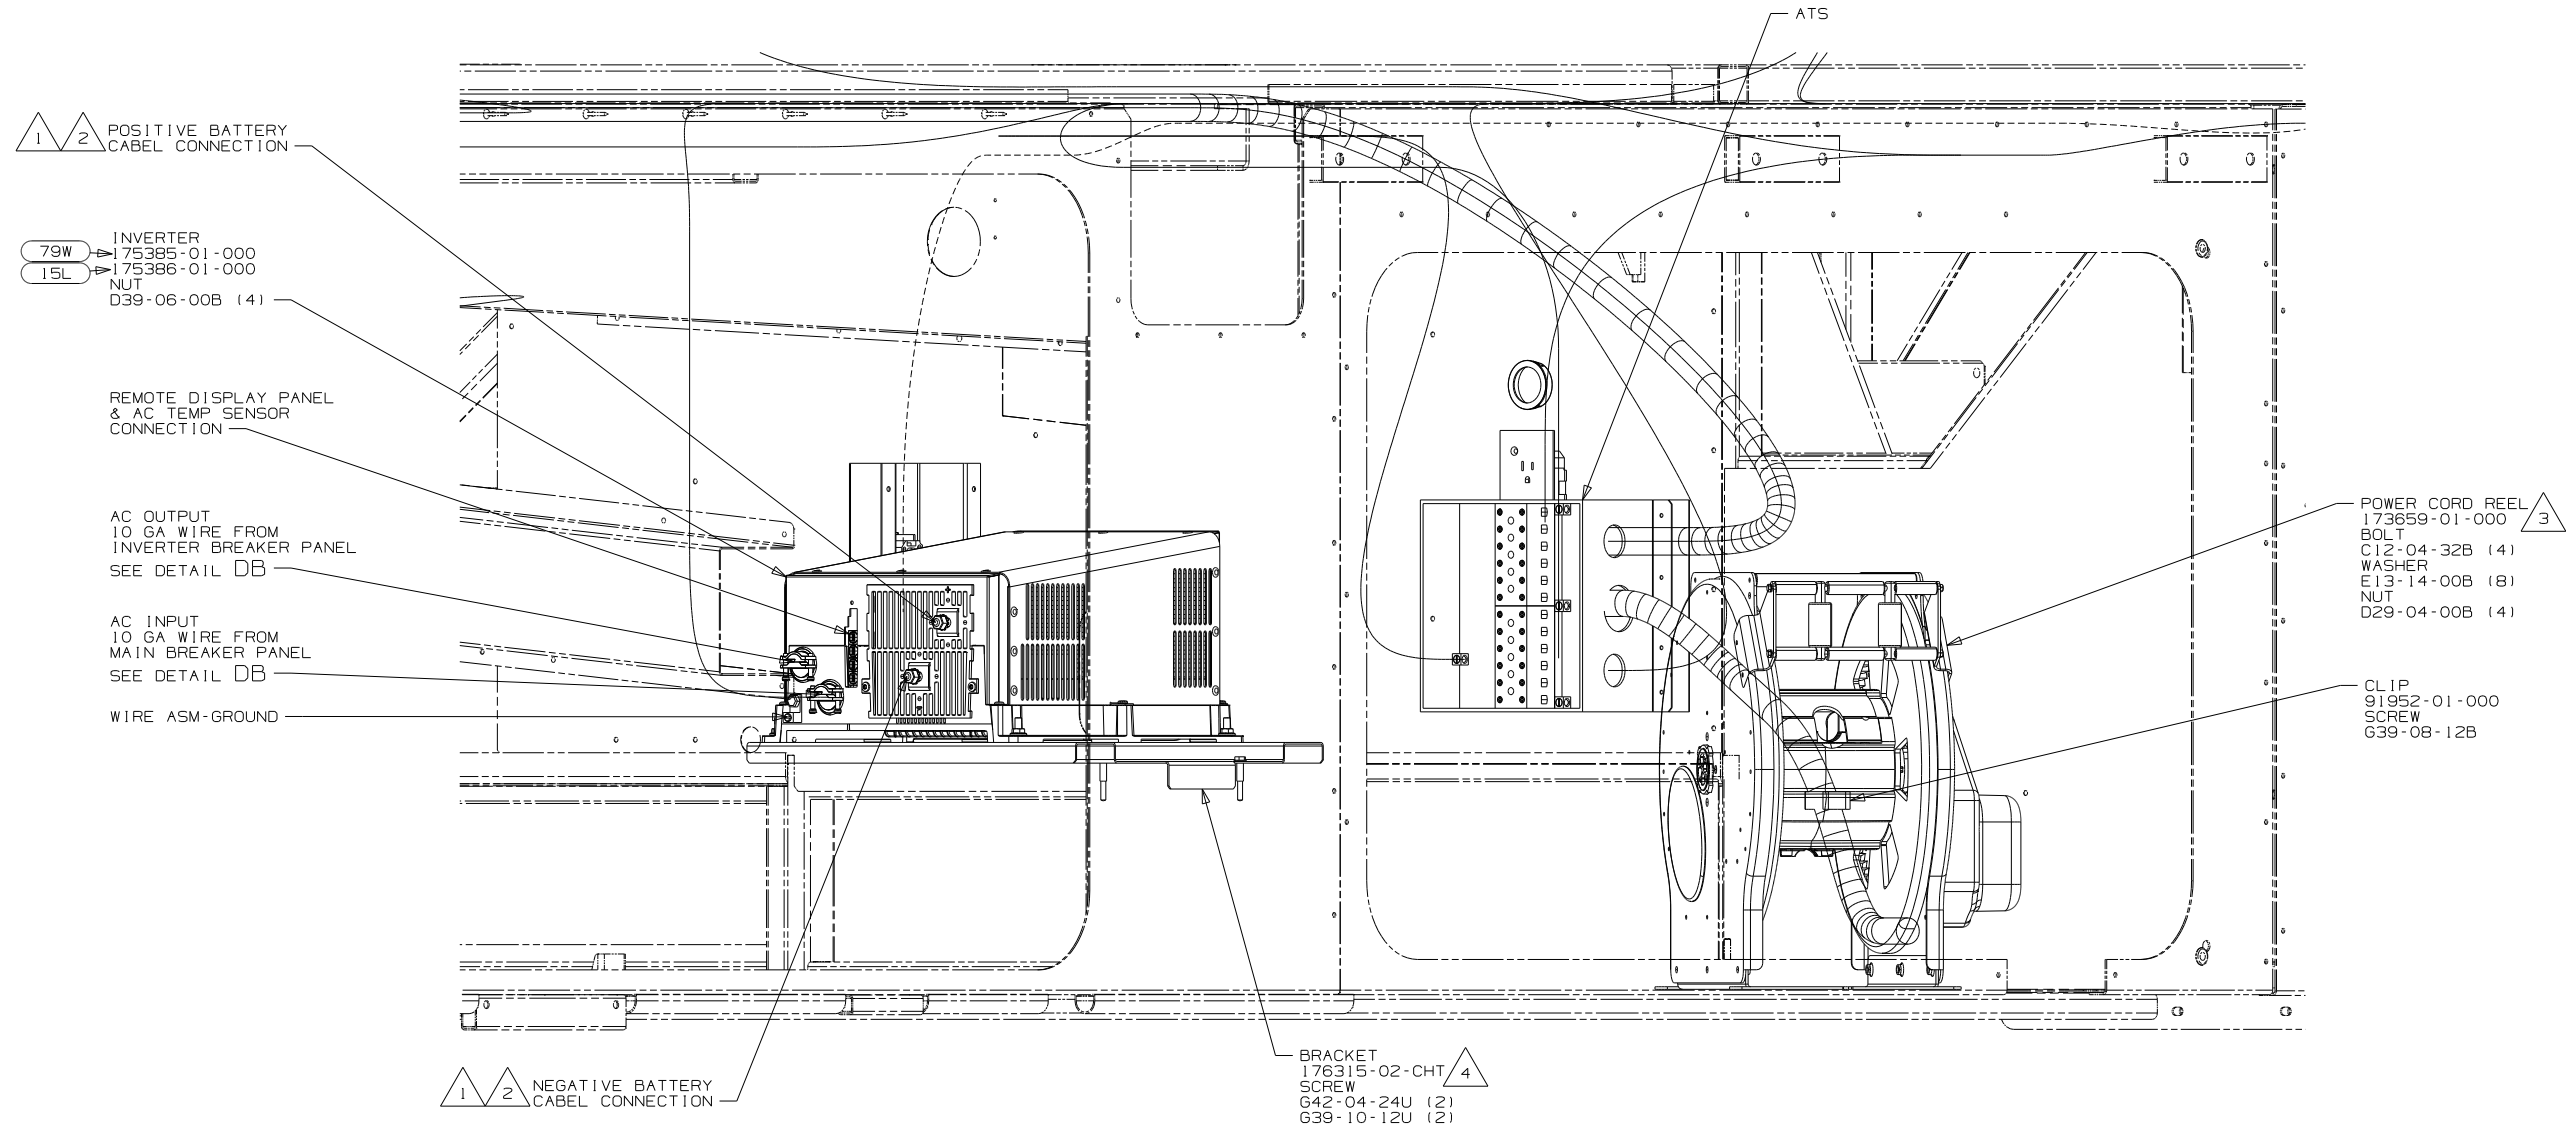

DETAIL DA

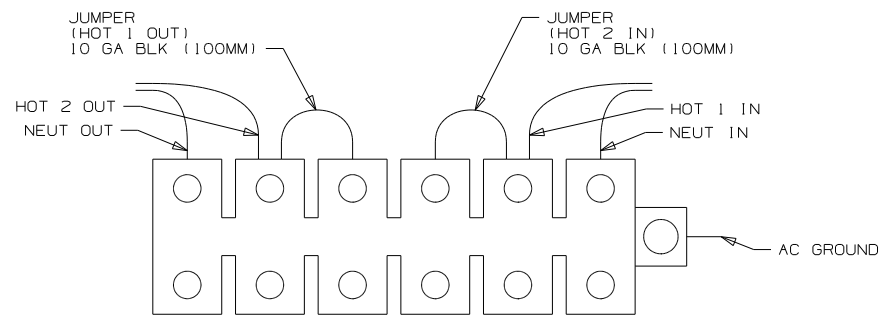

DETAIL DB

- 4 INVERTER IS LOCATED BY SCREW HOLES ON CLOSEOUT PANEL.
- 3 INSERT BOLT FROM BOTTOM OF COMPARTMENT.
- 2 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 1 DO NOT USE POWER/AIR TOOLS TO INSTALL NUT. TORQUE TO 10-12 FT LBS USING HAND TOOLS.

NOTES:

- 15L REFR/FRZR 2DOOR RESIDENTIAL
- 79W REFRIGERATOR-4 DOOR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED	11 R40BD
TITLE	DO NOT SCALE DRAWING
WIRING INSTL-BODY, 110V	
SHEET 4	PART NO 177151 REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

