






DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

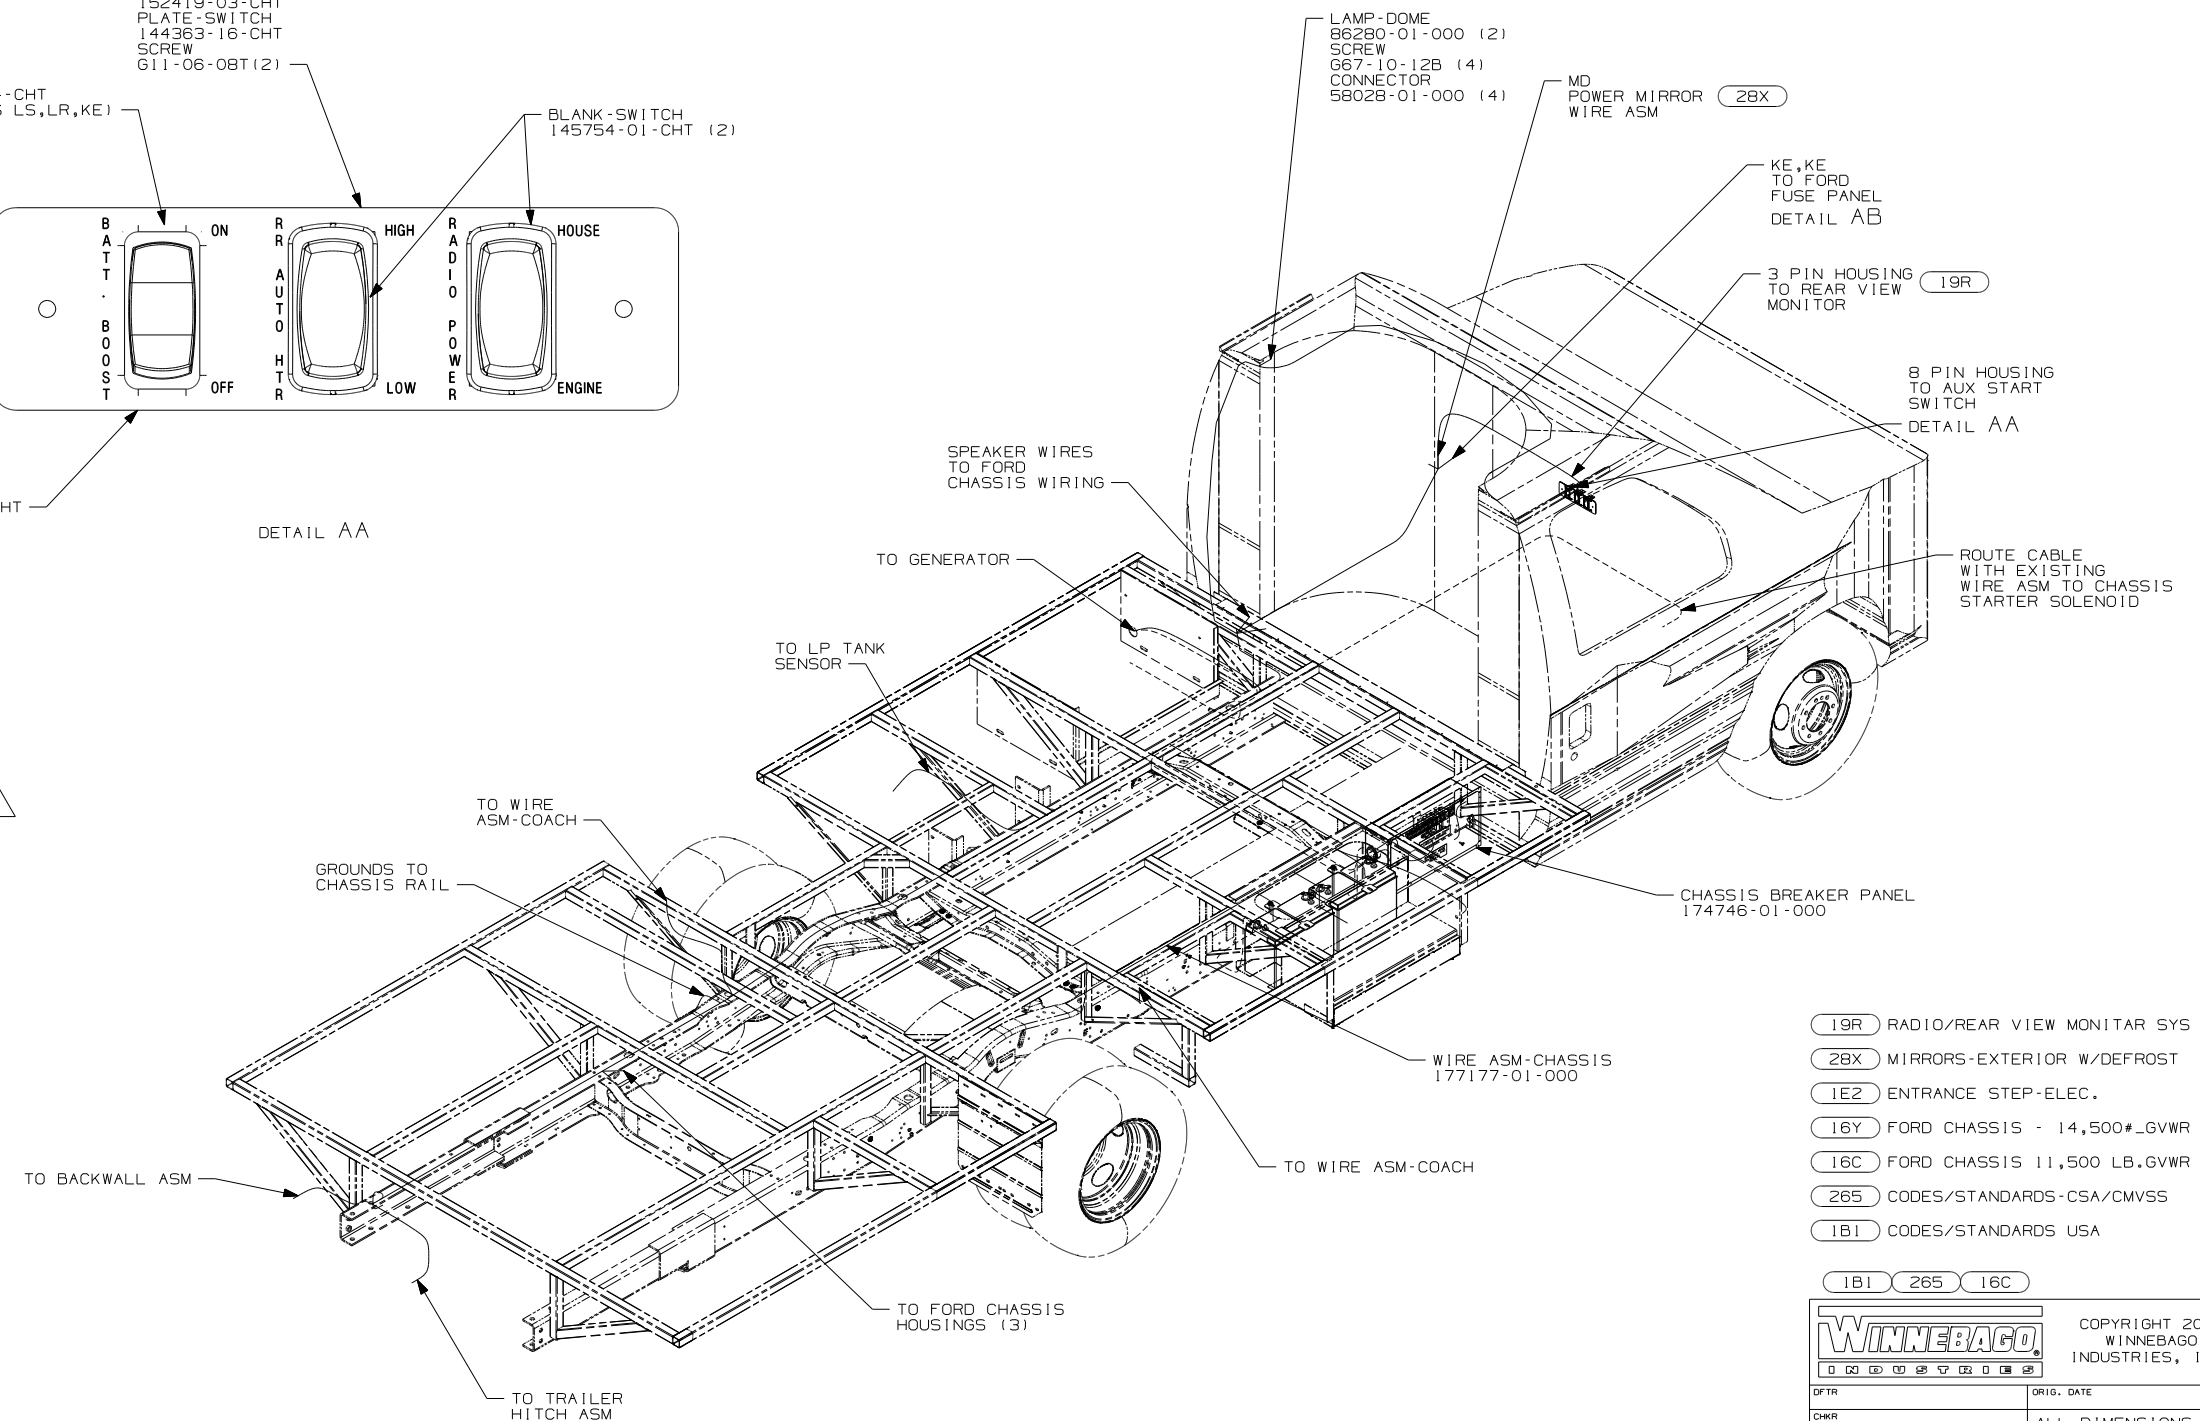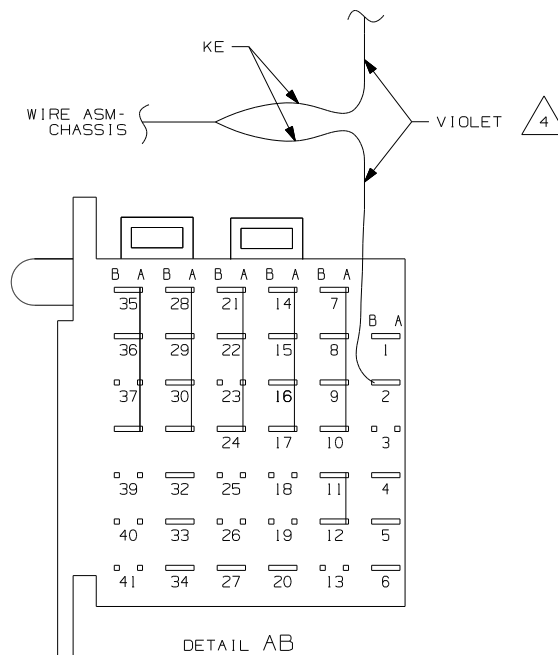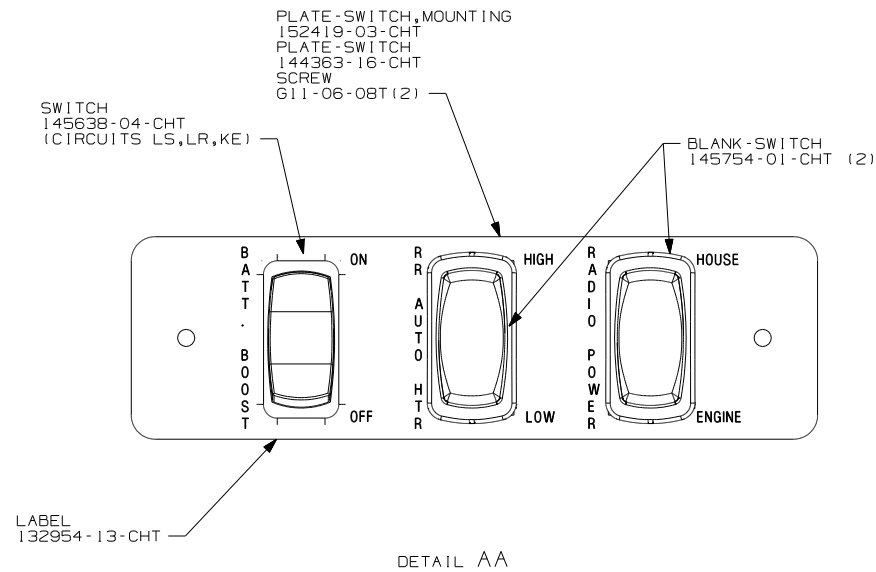

- RADIO/REAR VIEW MONITOR SYS
 MIRRORS-EXTERIOR W/DEFROST
 ENTRANCE STEP-ELEC.
 FORD CHASSIS - 14,500#-GVWR
 FORD CHASSIS 11,500 LB.GVWR
 CODES/STANDARDS-CSA/CMVSS
 CODES/STANDARDS USA

1B1		265		16C	
				COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFTB				ORIG. DATE	
CHKR				ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.				FIRST USED	
M.E.				11 224V	
DSNR				MATERIAL	
UNSPECIFIED TOLERANCES ARE:					
WHOLE DIM (X)				± 3	
ONE-PLACE (X,X1)				± 1,5	
TWO-PLACE (X,XX)				± 0,50	
ANGLE				± 1°	
THIRD ANGLE PROJECTION					

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-CHASSIS

SHEET 1 OF 2	PART NO 177174	REV
--------------	----------------	-----

REF :	1 6/8/2010
-------	------------

4 CUT WIRE AND RECONNECT AS SHOWN.

3. USE WIRE TIES 8343-04-000 AND 116673-01-000 APPROXIMATELY 600MM ON CENTER UNLESS OTHERWISE SPECIFIED.


2. SECURE CONDUIT 41953, TAB AS REQUIRED,
OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1. LEGEND: ————— WINNEBAGO: - - - - - CABLE: - - - - - CHASSIS SUPPLIED WIRING.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	---

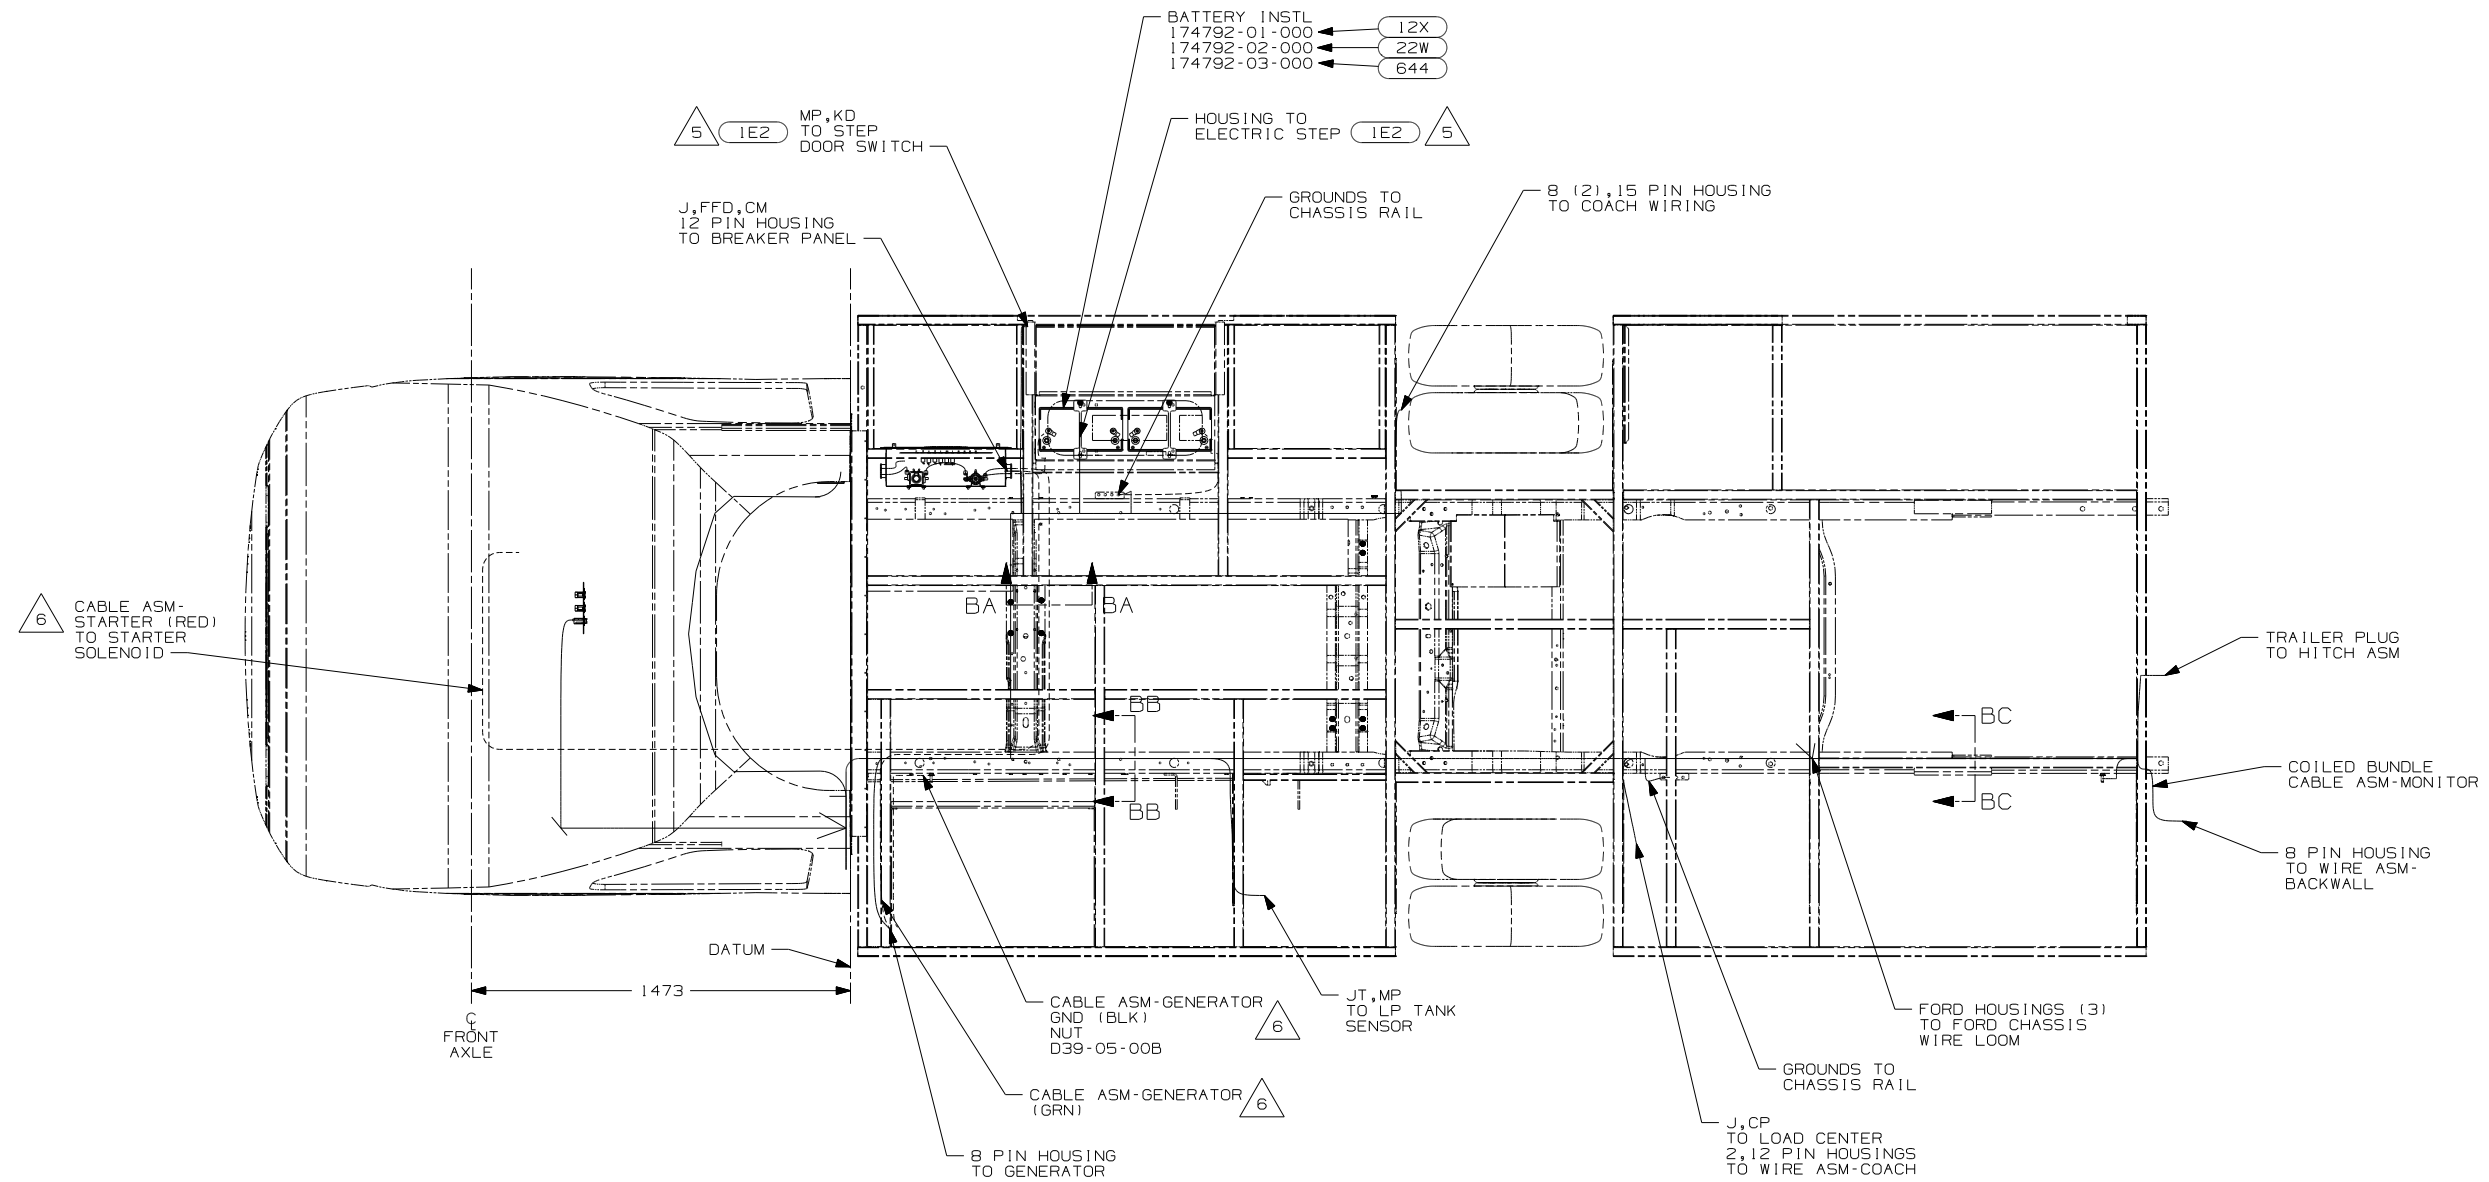


- NOTES:
- 6 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
 - 5 SECURE THE DROP BACK TO MAIN WIRE ASM TRUNK WHEN NOT USED.
 - 4 WIRES TO BE TIED TO CROSS MEMBER USING EXISTING HOLES.
 - 3 WIRES TO BE TIED TO TOP OF RAIL USING EXISTING HOLES.
 - 2 WIRES TO BE TIED TO INSIDE OF RAIL USING EXISTING HOLES.
 - 1 CUT OFF EXCESS END OF WIRE TIE.



SECTION BA-BA
(OPPOSITE FOR
RIGHT SIDE)



SECTION BB-BB



SECTION BC-BC

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 644 GREAT ALASKAN RENTAL PACKAGE
- 22W BATTERY-SECOND
- 12X BATTERY-ONE
- 16Y FORD CHASSIS - 14,500#_GVWR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 16Y

FIRST USED		11 224V
DO NOT SCALE DRAWING		
TITLE:		WIRING INSTL-CHASSIS
SHEET 2	PART NO	177174