



DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.




CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.


DRAWING NO.	FEATURE
177246-01	(WIN)
177246-02	(ITA)

RELEASE	REV/DATE	DWG NO
	A	177246
REV ZONE	REVISION RECORD	DATE DFR-ORIG

- 60M SWITCH-AUTO LEVEL 108357-18-000 ACTUATOR 108356-03-CHT (CIRCUITS SSD,SSE, SSC,SSE,SSF)
- 1A4 SWITCH-BLANK 96241-03-000
- SWITCH-WATER PUMP 108357-21-000 ACTUATOR 108356-03-CHT (CIRCUITS AG,JA AF,JS,JY)

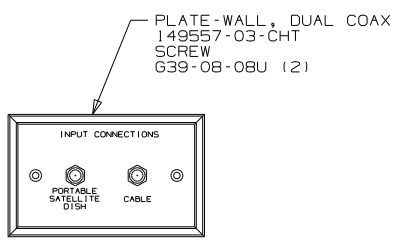

VIEW AA

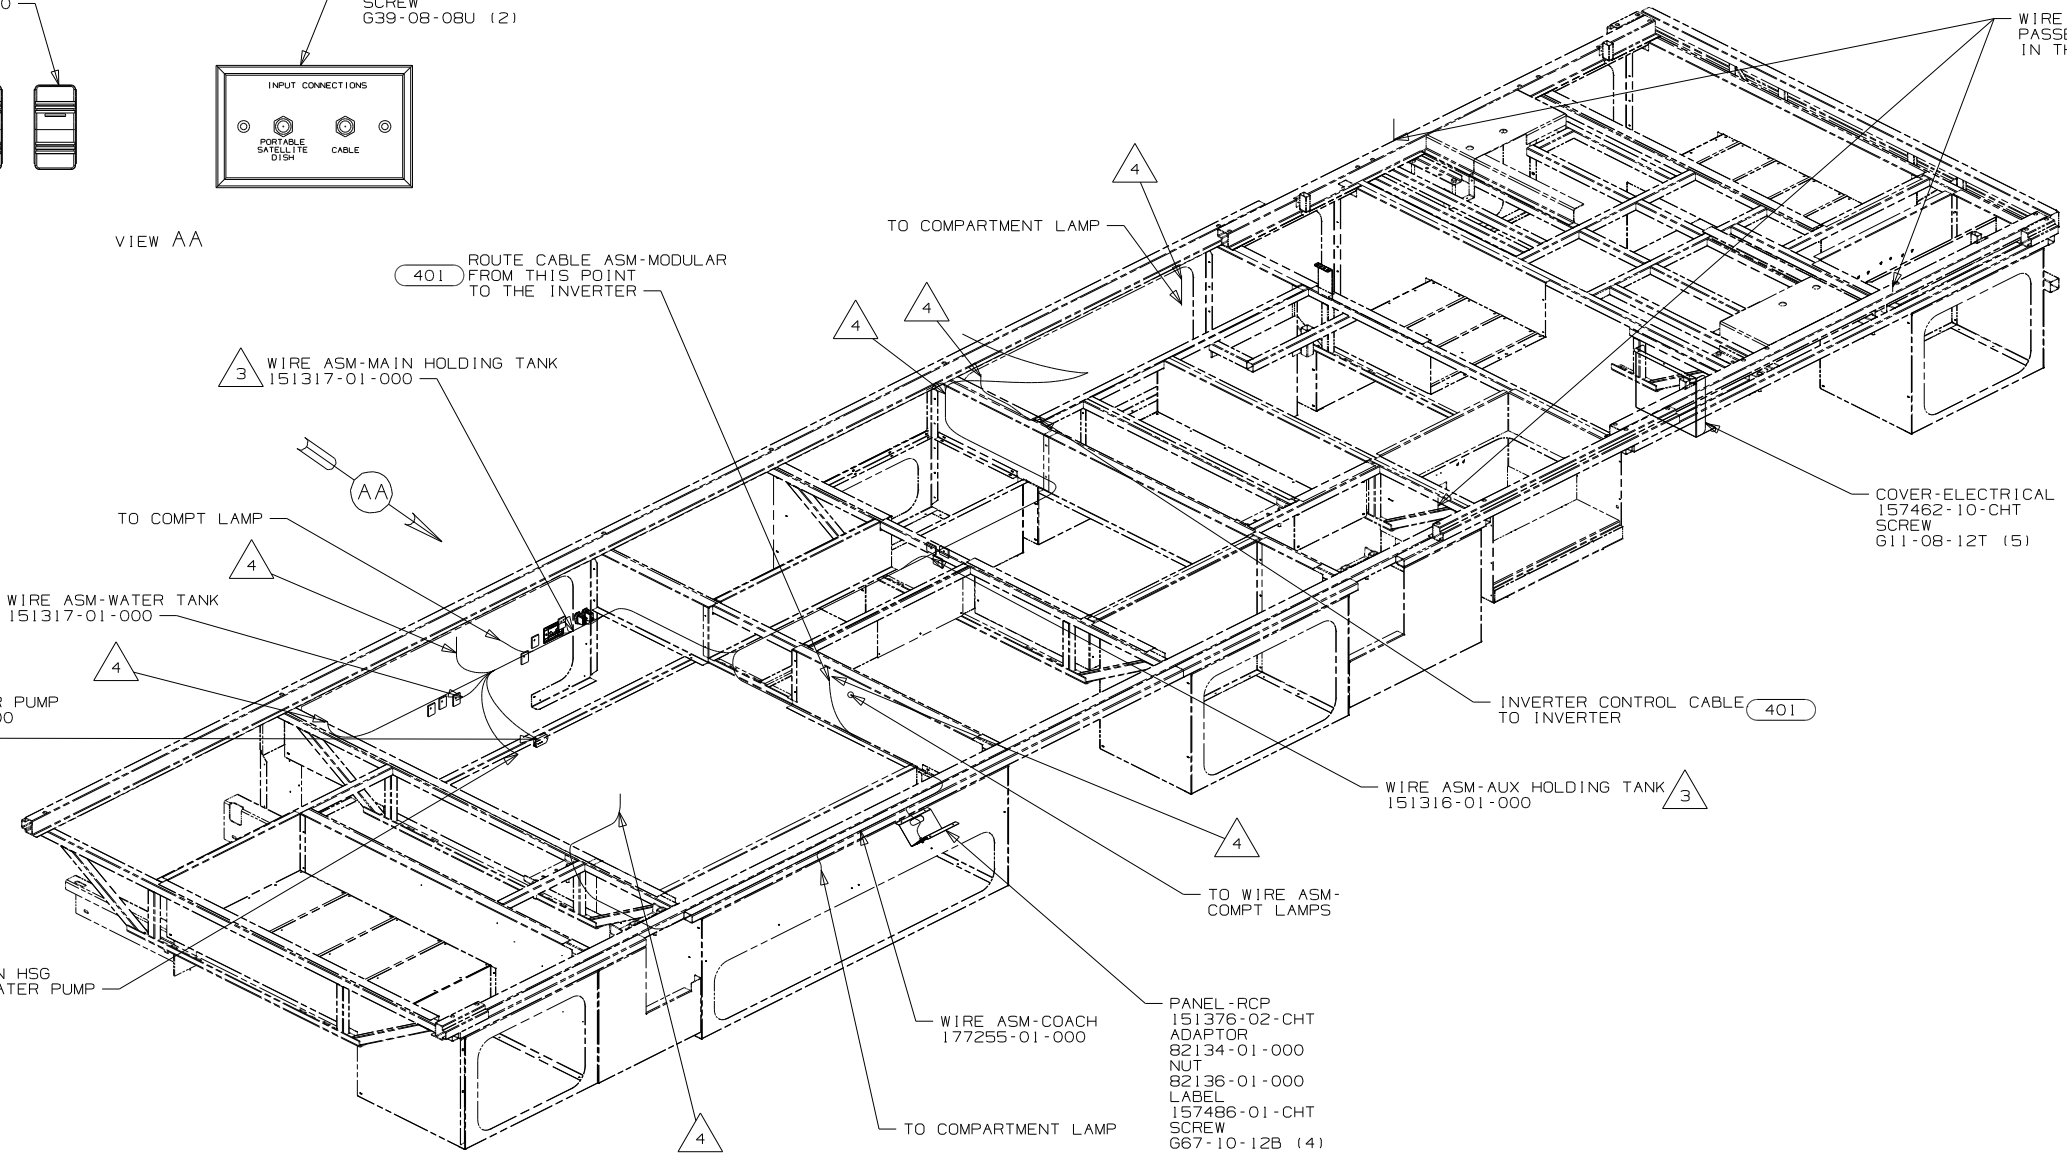


- (401) INVERTER-DC/AC, 1000 WATT
- (1A4) LEVELING JACK WITHOUT
- (60M) HYDRAULIC LEVEL JACKS-AUTO
- (WIN) WINNEBAGO ONLY
- (ITA) ITASCA ONLY
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA

- (4) WIRE PASSES THROUGH FLOOR IN THIS AREA.
- (3) PLACE CROSS LOCATOR ON SENSOR OVER DIMPLES ON TANK.

- ROUTE TANK SENSOR WIRES SO THEY DO NOT PASS OVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
- ALL WIRES TO BE SECURED WITH CLAMP10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600mm, USE SCREW 667-XX-XXX OR 656-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

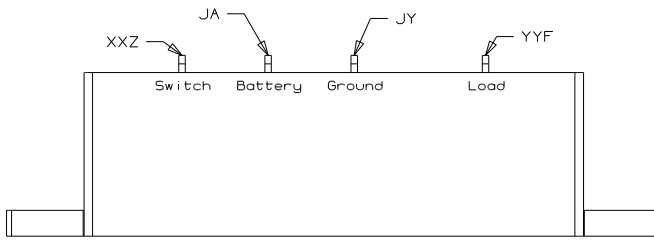

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

(X-X) FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

WINNEBAGO COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.

DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	11 D37L

UNSPECIFIED TOLERANCES ARE: MATERIAL:

WHOLE DIM (X)	: 3
ONE-PLACE (X.X)	: 1.5
TWO-PLACE (X.XX)	: 0.50
ANGLE	: 1°


THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING




TITLE: WIRING INSTL-BODY, 12V

SHEET 1 OF 7 PART NO 177246 REV

REF: 1 12/13/2010

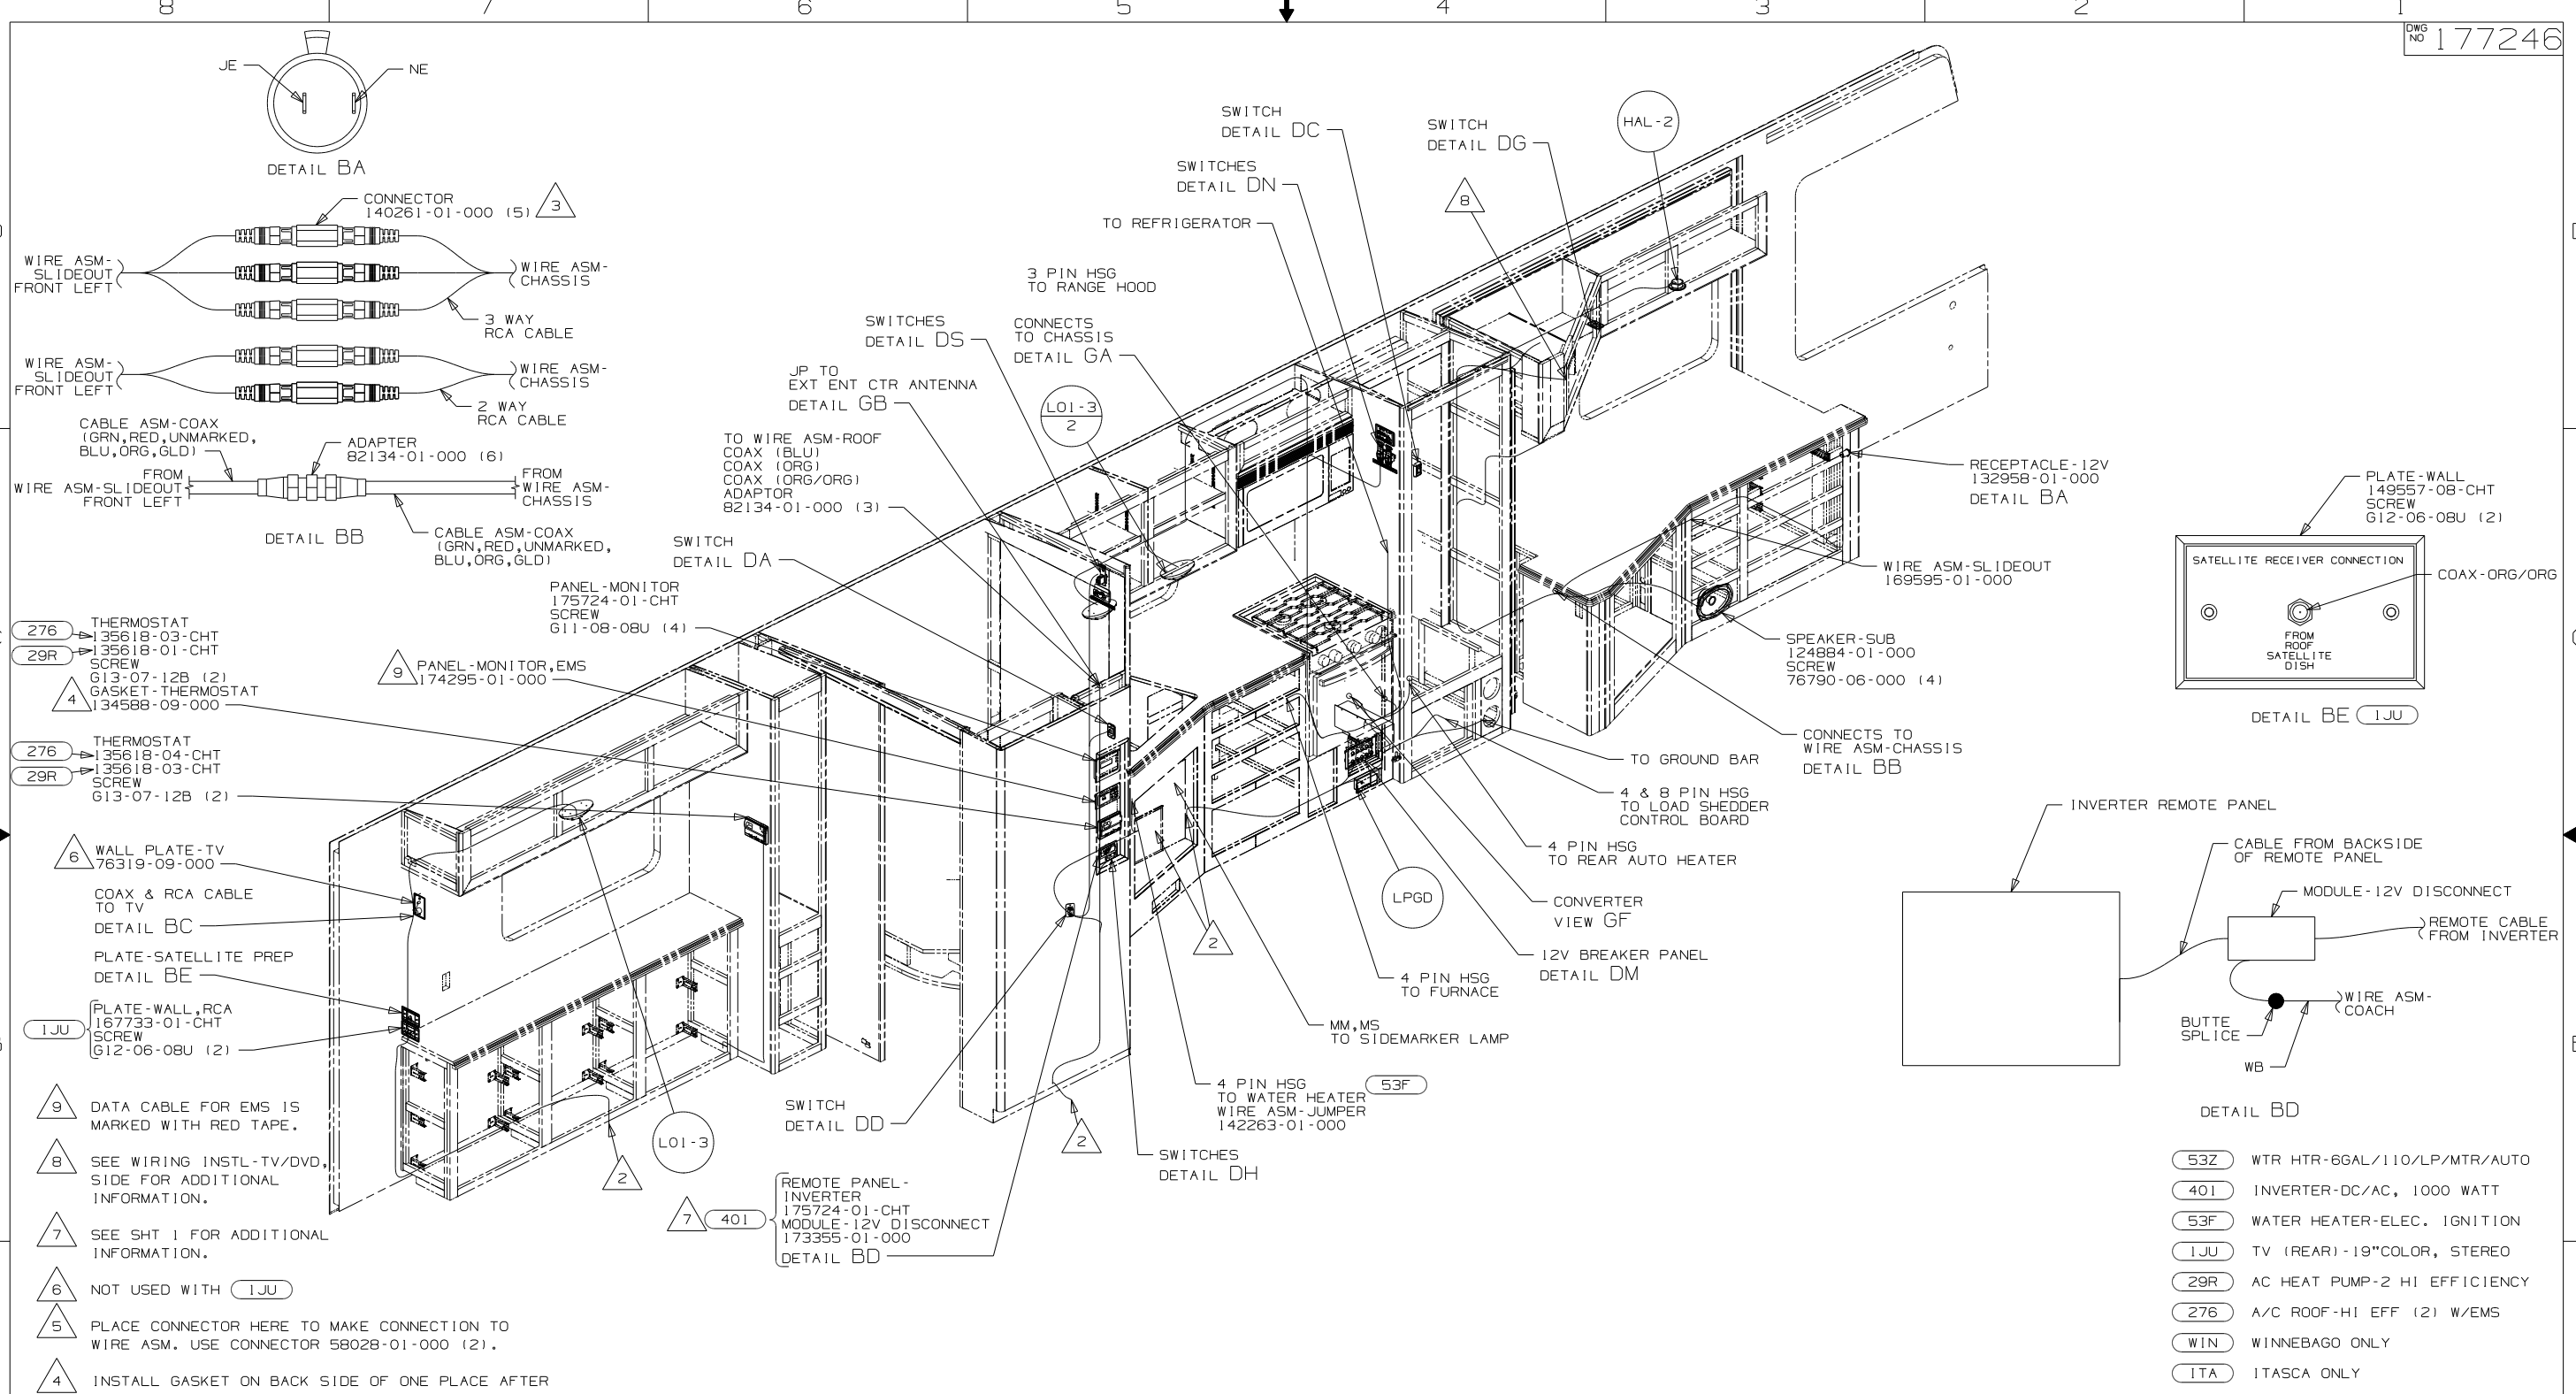

- NOTES:
1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600mm, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
 2. WIRE PASSES THROUGH FLOOR IN THIS AREA.
 3. WRAP BOTH ENDS WITH TAPE 8363-01-000 TO SECURE CONNECTION.
 4. INSTALL GASKET ON BACK SIDE OF ONE PLACE AFTER INSTALLATION OF THERMOSTAT, MAKING SURE THAT THE GASKET COVERS AND SEALS THE HOLE THAT THE WIRES PASS THROUGH.
 5. PLACE CONNECTOR HERE TO MAKE CONNECTION TO WIRE ASM. USE CONNECTOR 58028-01-000 (2).
 6. NOT USED WITH 1JU
 7. SEE SH1 FOR ADDITIONAL INFORMATION.
 8. SEE WIRING INSTL-TV/DVD, SIDE FOR ADDITIONAL INFORMATION.
 9. DATA CABLE FOR EMS IS MARKED WITH RED TAPE.


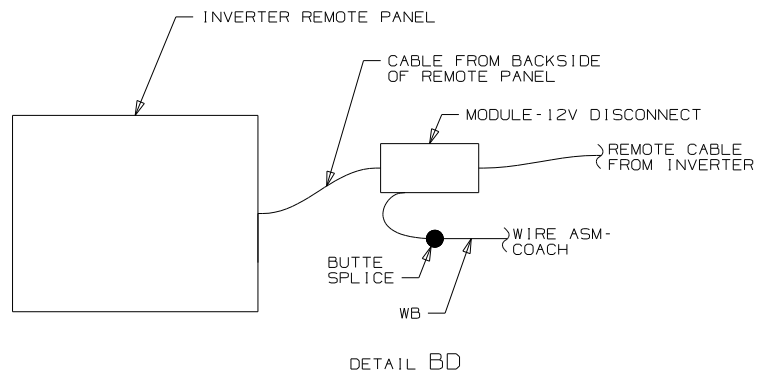
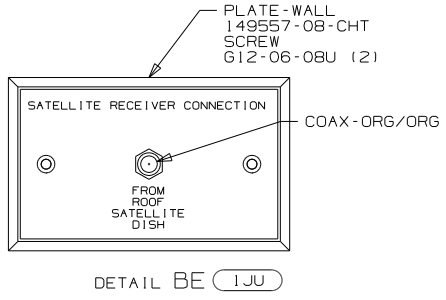
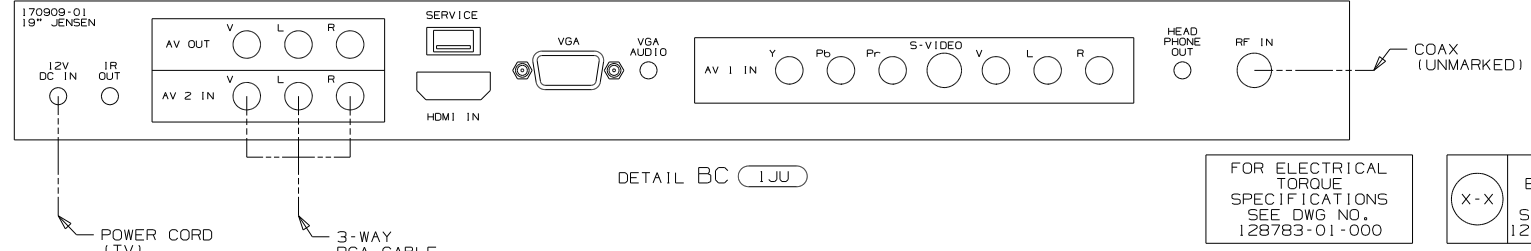


- (53Z) WTR HTR-6GAL/110/LP/MTR/AUTO
- (401) INVERTER-DC/AC, 1000 WATT
- (53F) WATER HEATER-ELEC. IGNITION
- (1JU) TV (REAR)-19"COLOR, STEREO
- (29R) AC HEAT PUMP-2 HI EFFICIENCY
- (276) A/C ROOF-HI EFF (2) W/EMS
- (WIN) WINNEBAGO ONLY
- (ITA) ITASCA ONLY
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA

FIRST USED	11 D37L
DO NOT SCALE DRAWING	
TITLE:	WIRING INSTL-BODY, 12V
SHEET 2	PART NO 177246 REV


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

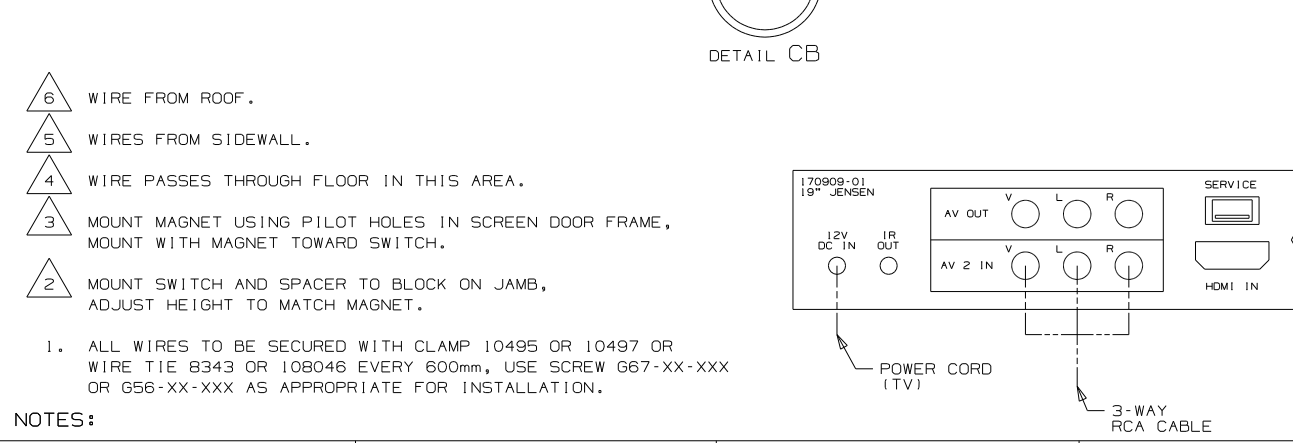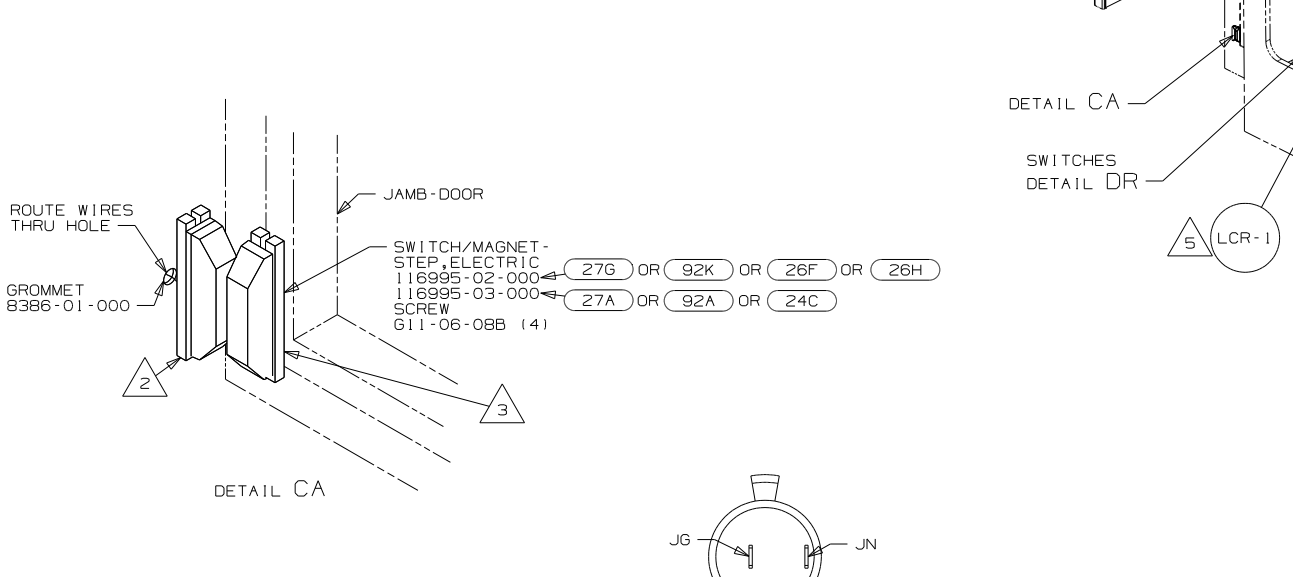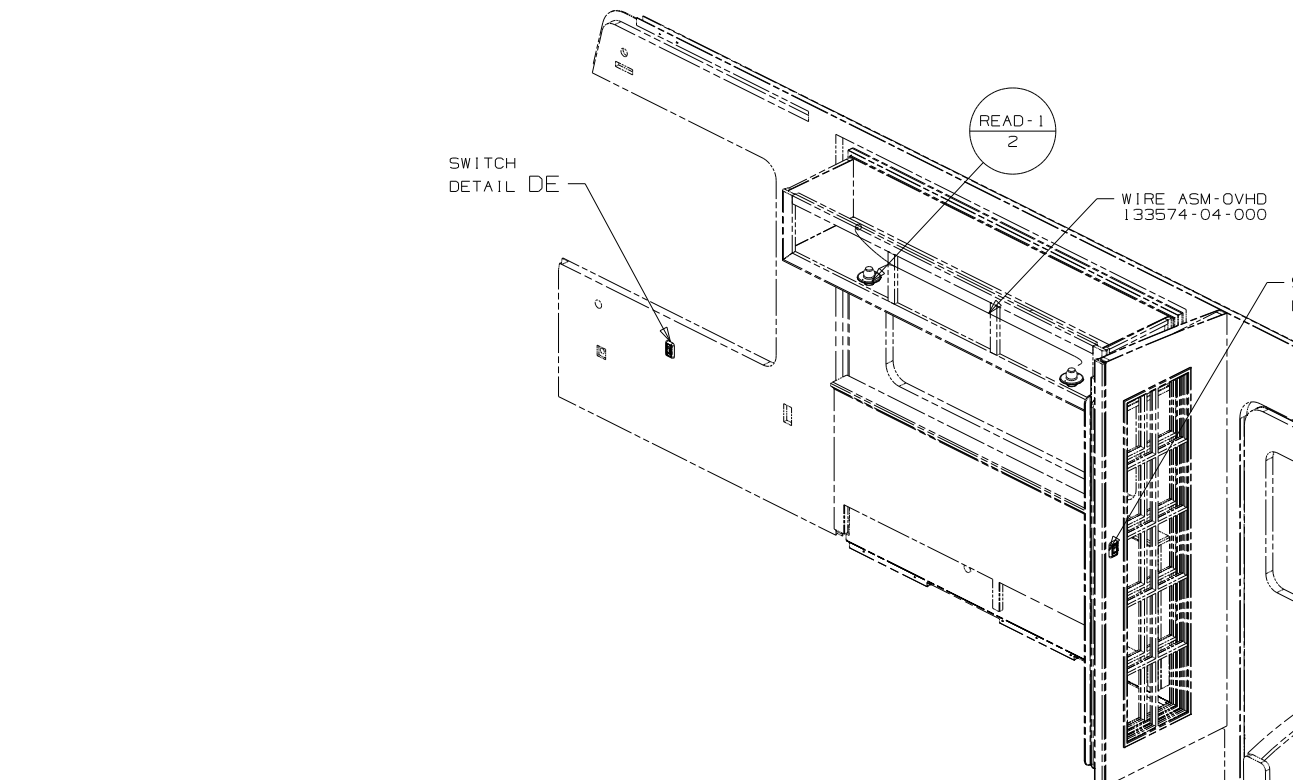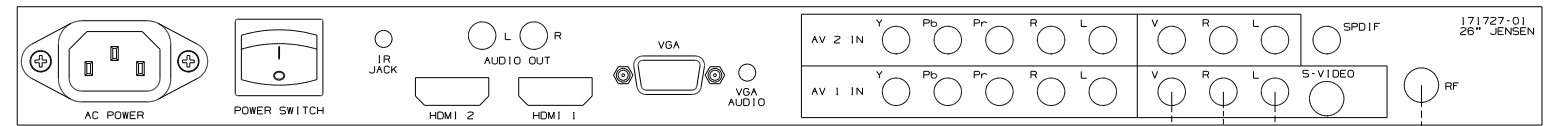


- NOTES:
- 1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600mm, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
- 6 WIRE FROM ROOF.
- 5 WIRES FROM SIDEWALL.
- 4 WIRE PASSES THROUGH FLOOR IN THIS AREA.
- 3 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME, MOUNT WITH MAGNET TOWARD SWITCH.
- 2 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB, ADJUST HEIGHT TO MATCH MAGNET.


- 61A TV-26" COLOR, STEREO W/REMOTE
 - 420 TV-19" WITH REMOTE
 - 92K EXTERIOR GRAPHICS PACKAGE #2
 - 92A EXT FULL BODY PAINT PKG # 2
 - 27G EXTERIOR GRAPHICS PACKAGE #1
 - 27A EXT FULL BODY PAINT PKG #1
 - 26H EXT GRAPHIC/PAINT-DLX PKG 2
 - 26F EXT GRAPHIC/PAINT DLX PKG 1
 - 24C EXT FULL BODY PAINT PKG # 3
 - 1D5 ENTERTAINMENT CENTR/EXT W/CO
 - 265 CODES/STANDARDS-CSA/CMVSS
 - 1B1 CODES/STANDARDS USA
- 170909-01 19" JENSEN
- AV OUT V L R SERVICE VGA VGA AUDIO
- AV 1 IN Y Pb Pr S-VIDEO V L R HEAD PHONE OUT RF IN
- COAX (GRN/GRN)
- POWER CORD (TV)
- 3-WAY RCA CABLE
- FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000
- FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
- 11 D37L
- DO NOT SCALE DRAWING
- TITLE: WIRING INSTL-BODY, 12V
- SHEET 3 PART NO 177246 REV
- 12/13/2010




DETAIL DA




DETAIL DF




DETAIL DL

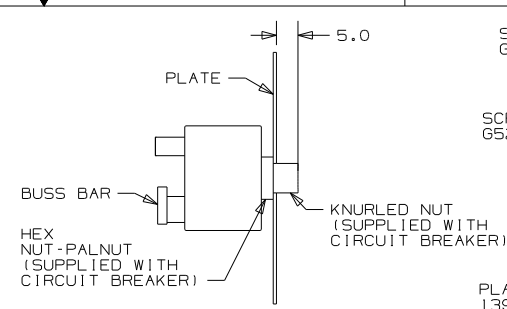


DETAIL DP

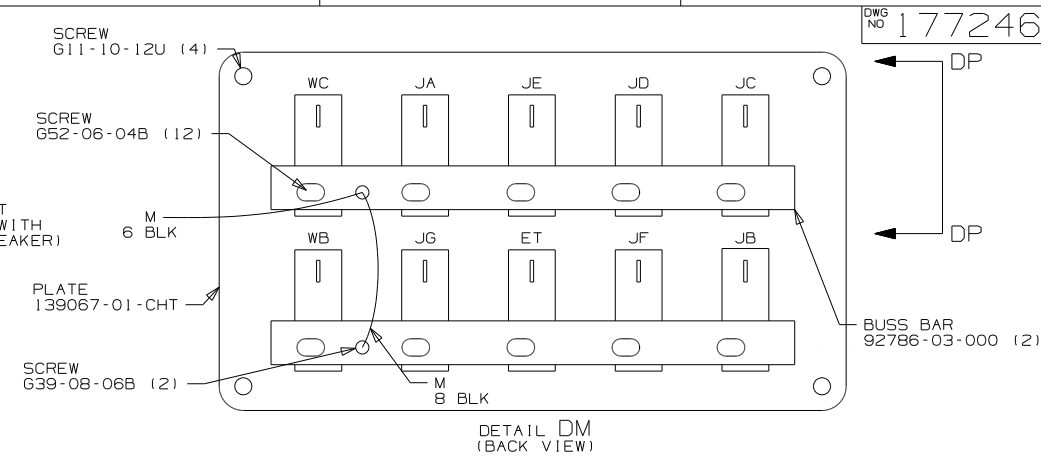


DETAIL DM (BACK VIEW)




DETAIL DB




DETAIL DG




DETAIL DC




DETAIL DH




DETAIL DD




DETAIL DJ






DETAIL DE




DETAIL DK

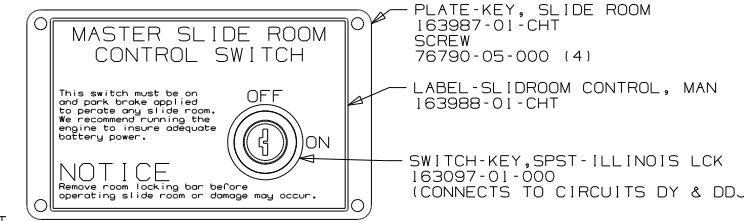


DETAIL DN

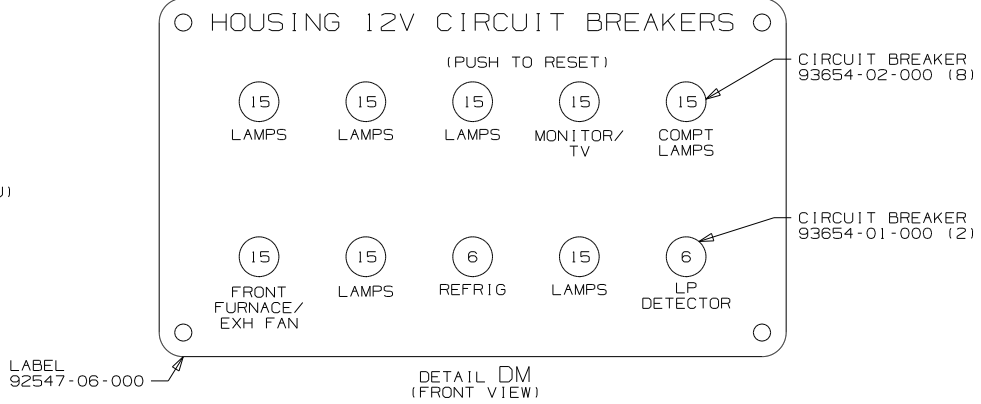


DETAIL DM (FRONT VIEW)

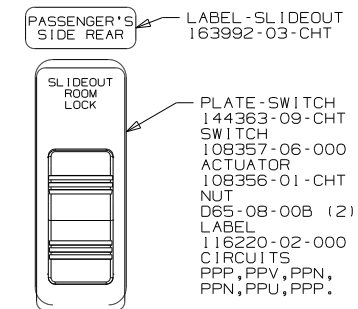

DETAIL DS

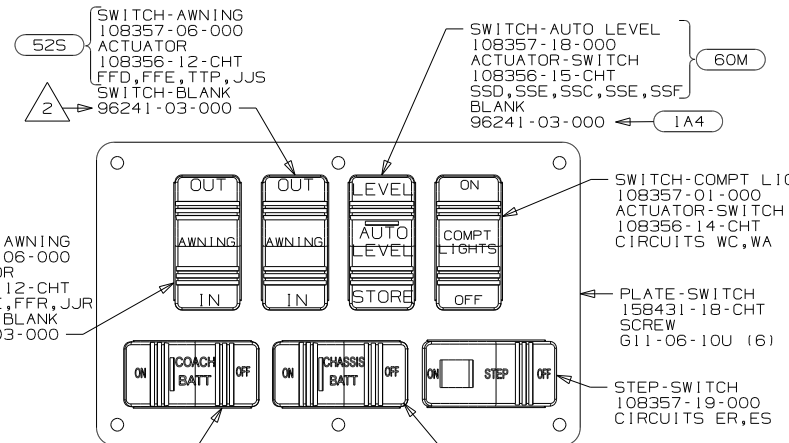

DETAIL DR

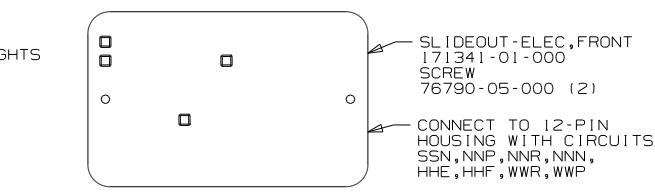

WARNING CRUSH HAZARD. Keep people and objects clear of the inside and the outside of the slideout room when operating. Failure to comply could result in death or serious injury.

- 5 FOR SWITCH ORIENTATION SEE DETAIL DJ
 - 4 WITHOUT 52S
 - 3 FOR SWITCH ORIENTATION SEE DETAIL EP.
 - 2 WITHOUT 52N
1. SWITCHES ARE TO BE INSTALLED AS SHOWN ON THIS DRAWING.



NOTES:

- 52N AWNING - PATIO, ELECTRIC
- 52S AWNING - 2ND PATIO, ELECTRIC
- 60M HYDRAULIC LEVEL JACKS-AUTO
- 53Z WTR HTR-6GAL/110/LP/MTR/AUTO
- 53F WATER HEATER-ELEC. IGNITION
- 1A4 LEVELING JACK WITHOUT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED	11 D37L
DO NOT SCALE DRAWING	
TITLE:	WIRING INSTL-BODY, 12V
SHEET 4	PART NO 177246 REV


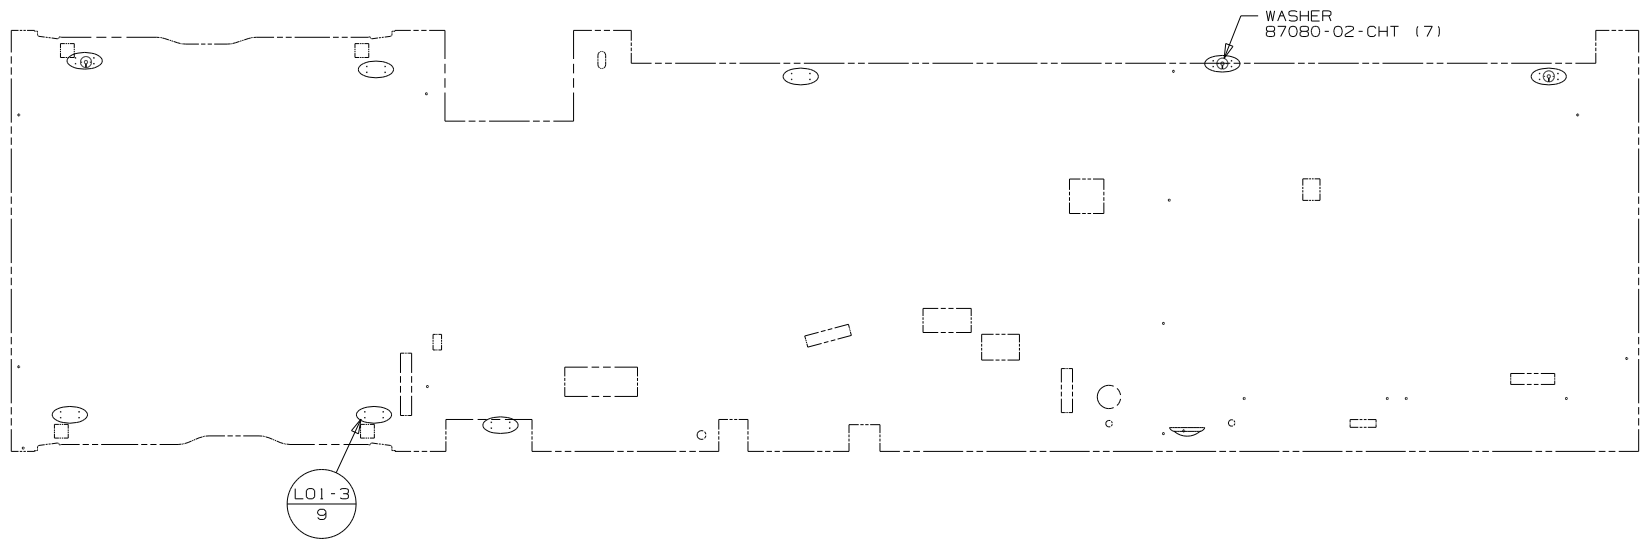
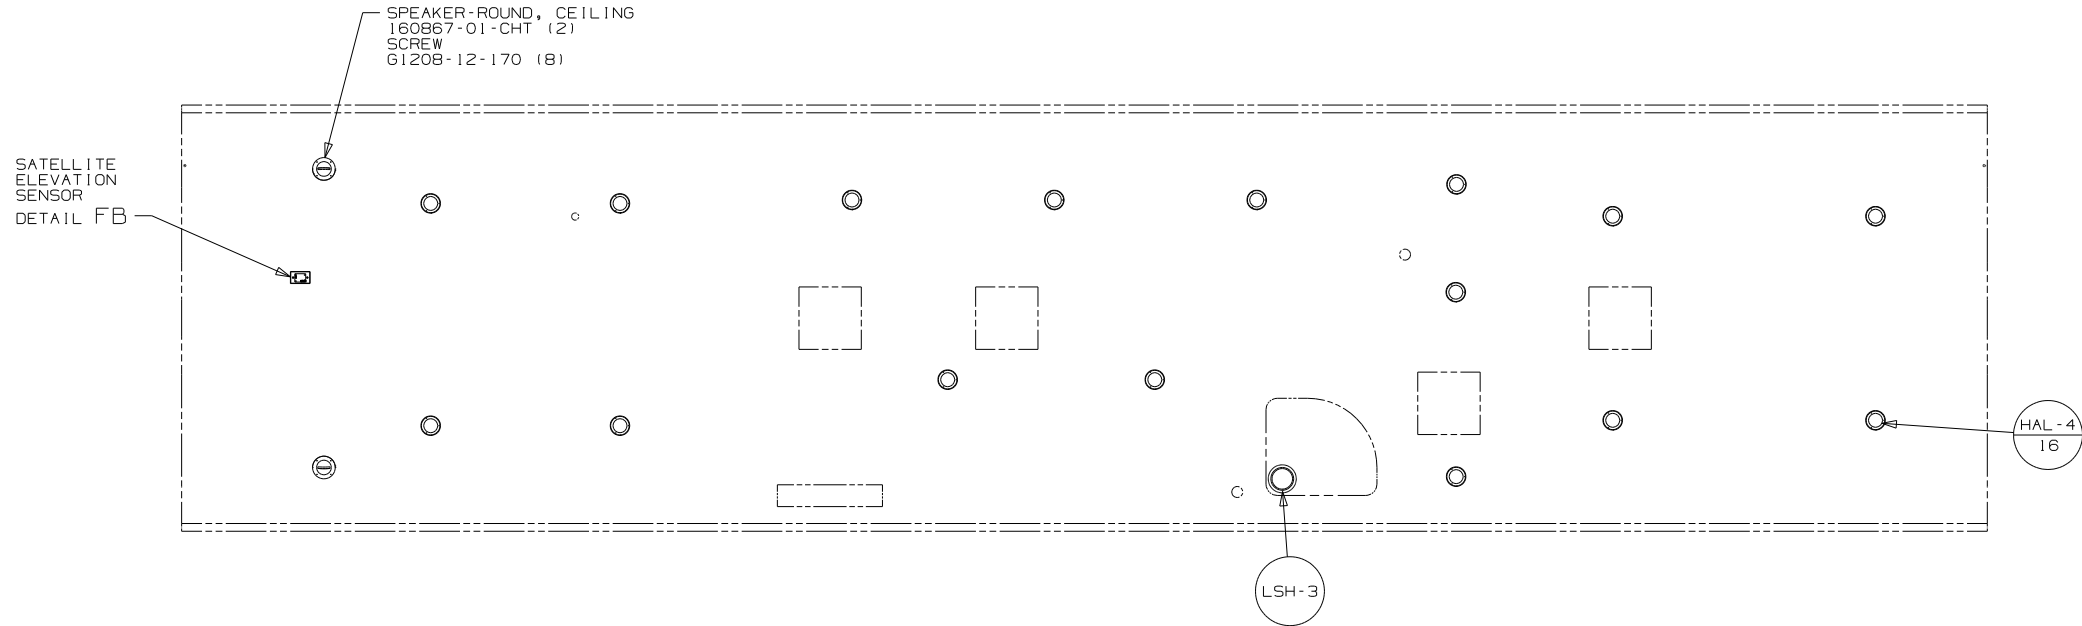


265 CODES/STANDARDS-CSA/CMVSS
 1B1 CODES/STANDARDS USA

1B1	265
FIRST USED	11 D37L
DO NOT SCALE DRAWING	
TITLE:	WIRING INSTL-BODY, 12V
SHEET 5	PART NO 177246 REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

(X-X) FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

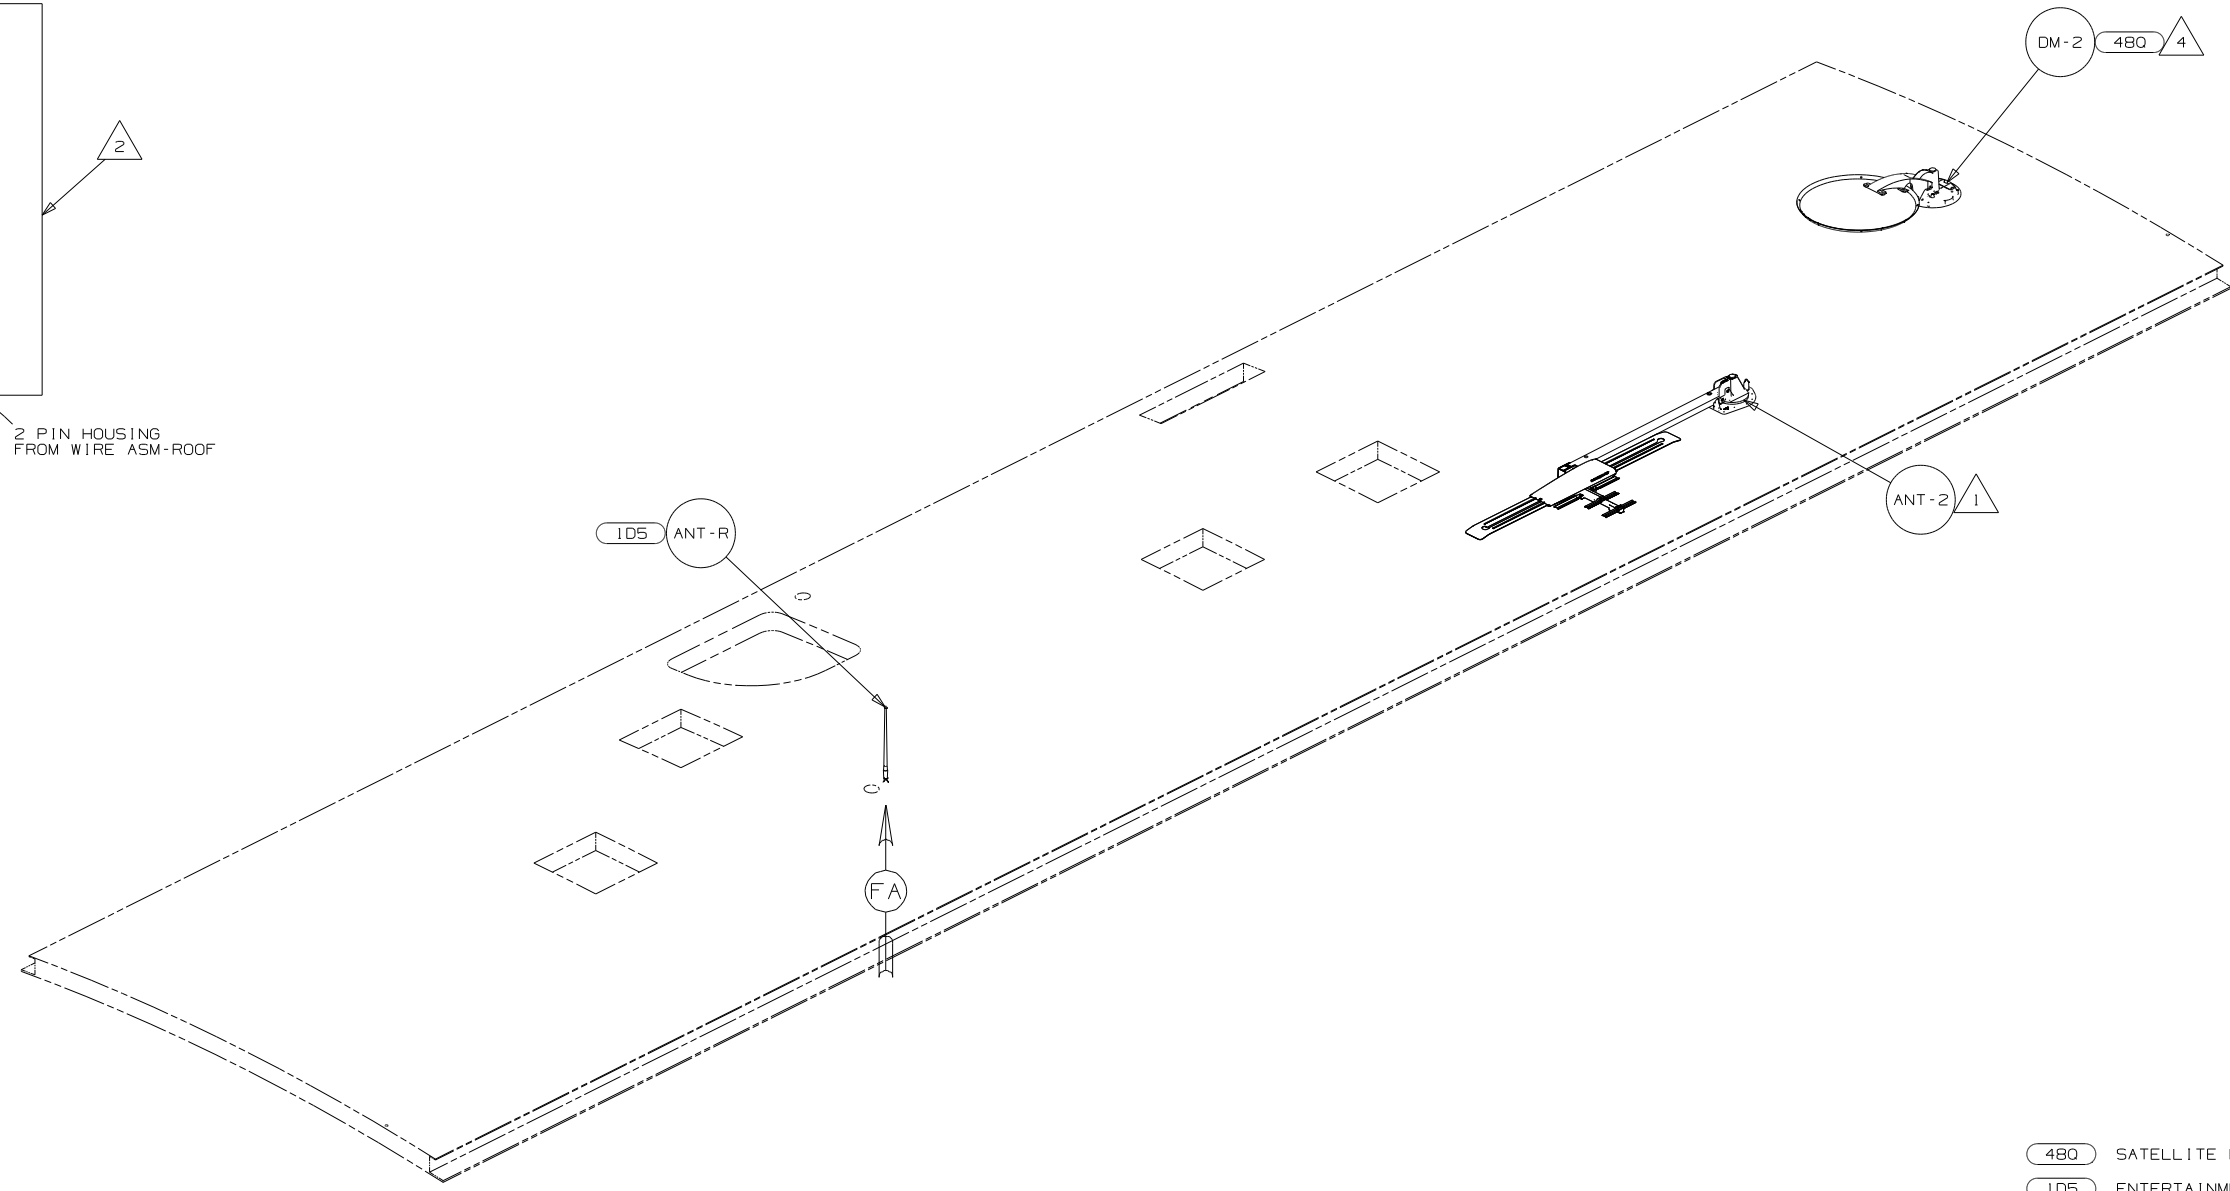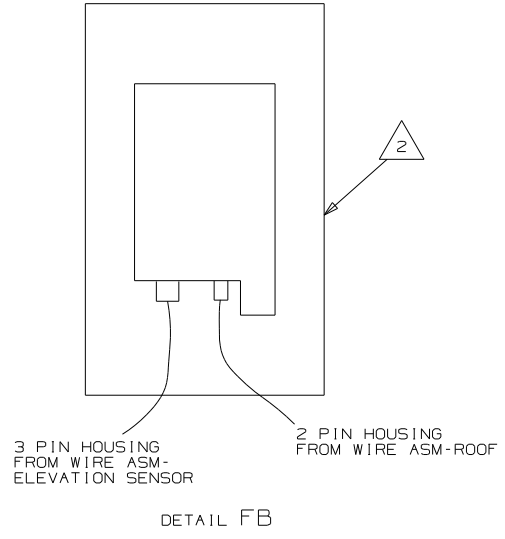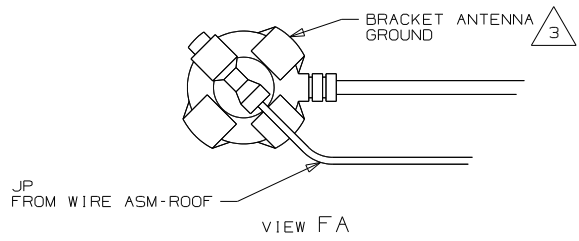








- NOTES:
- △ 4 CONNECT THE ORANGE COAX FROM ROOF ASM TO ONE OF THE 2 GRAY COAX CABLES ON THE SATELLITE DISH, THE OTHER GRAY COAX IS NOT USED.
 - △ 3 WRAP LEGS AROUND ANTENNA BASE.
 - △ 2 SENSOR SUPPLIED WITH SATELLITE ASSEMBLY.
 - △ 1 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.

- 480 SATELLITE DISH & ELEV.SENSOR
- ID5 ENTERTAINMENT CENTR/EXT W/CD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED	11 D37L
TITLE:	DO NOT SCALE DRAWING
	WIRING INSTL-BODY, 12V
SHEET 6	PART NO 177246 REV

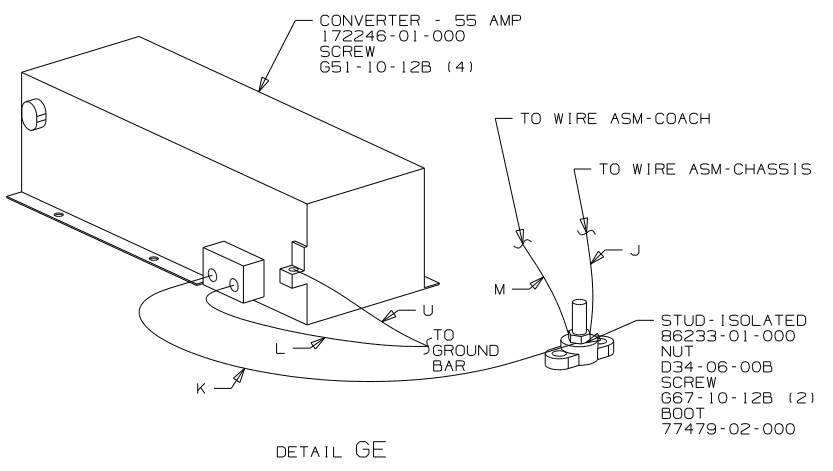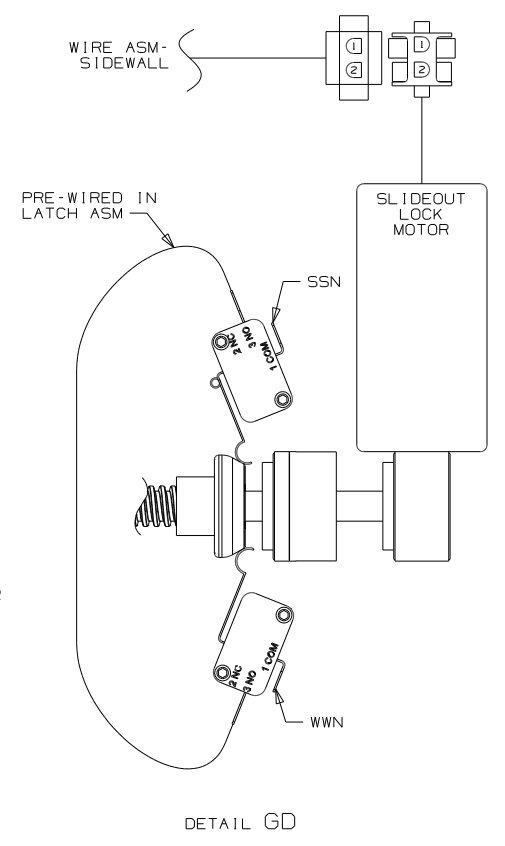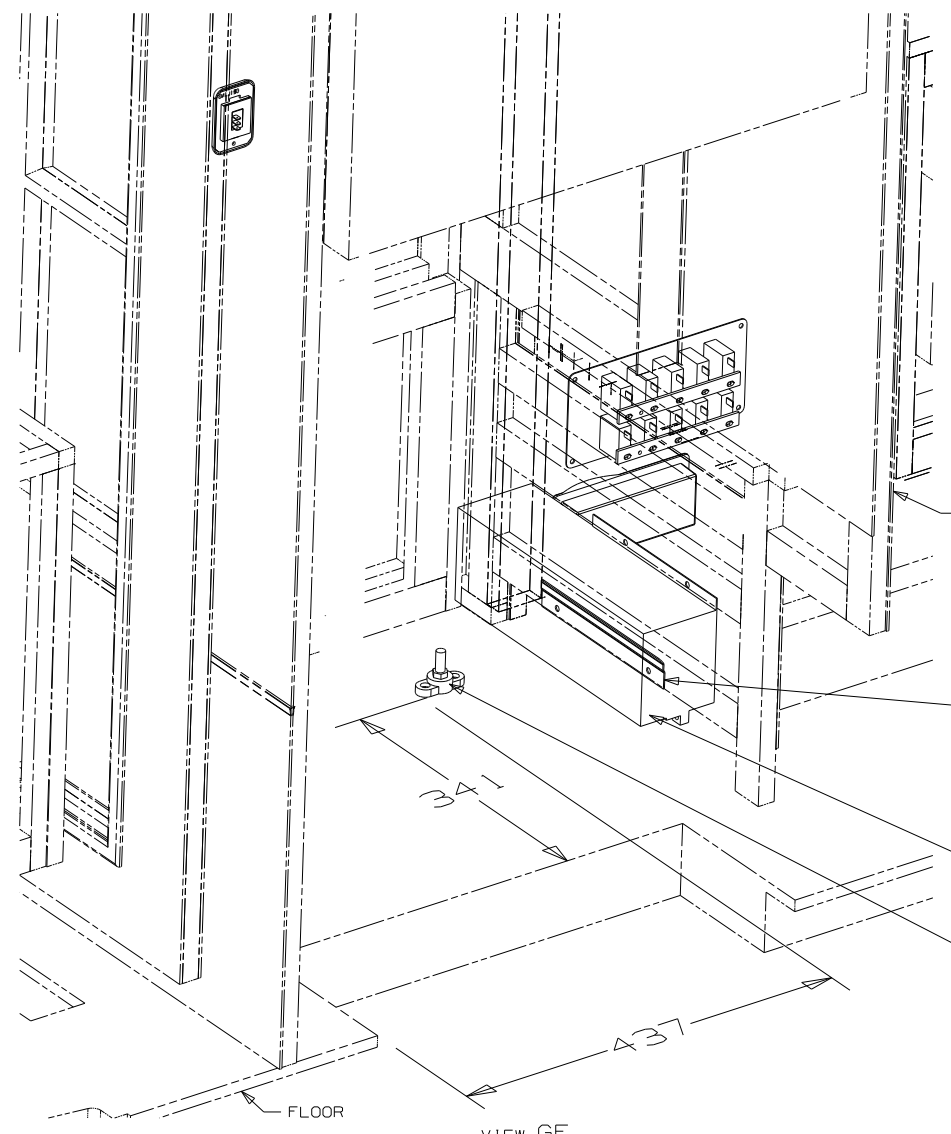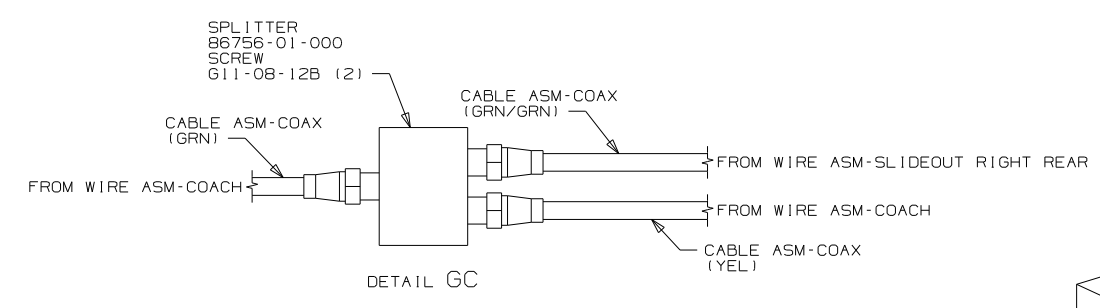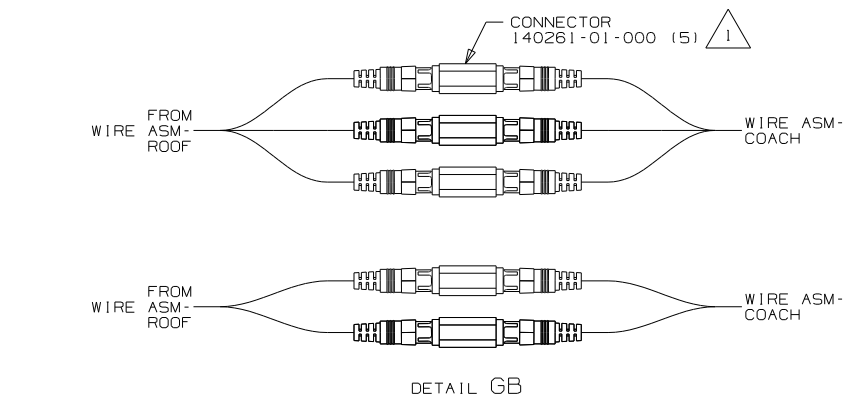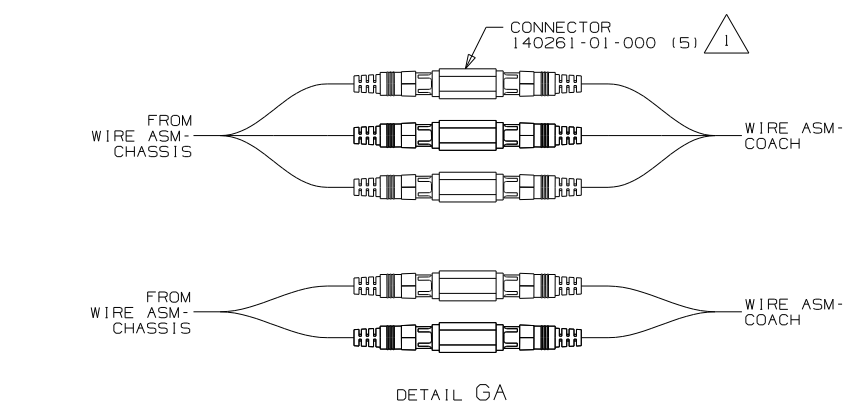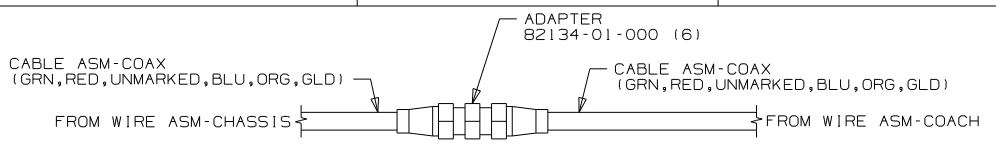

NOTES:
 1 WRAP BOTH ENDS WITH TAPE 8363-01-000 TO SECURE CONNECTION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS - CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

FIRST USED	11 D37L
TITLE:	DO NOT SCALE DRAWING
	WIRING INSTL - BODY, 12V
SHEET 7	PART NO 177246 REV