





**DANGER**

**Danger of electrical shock, burns or death.** Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.

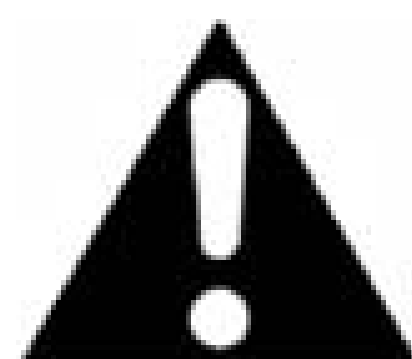


**CAUTION**

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

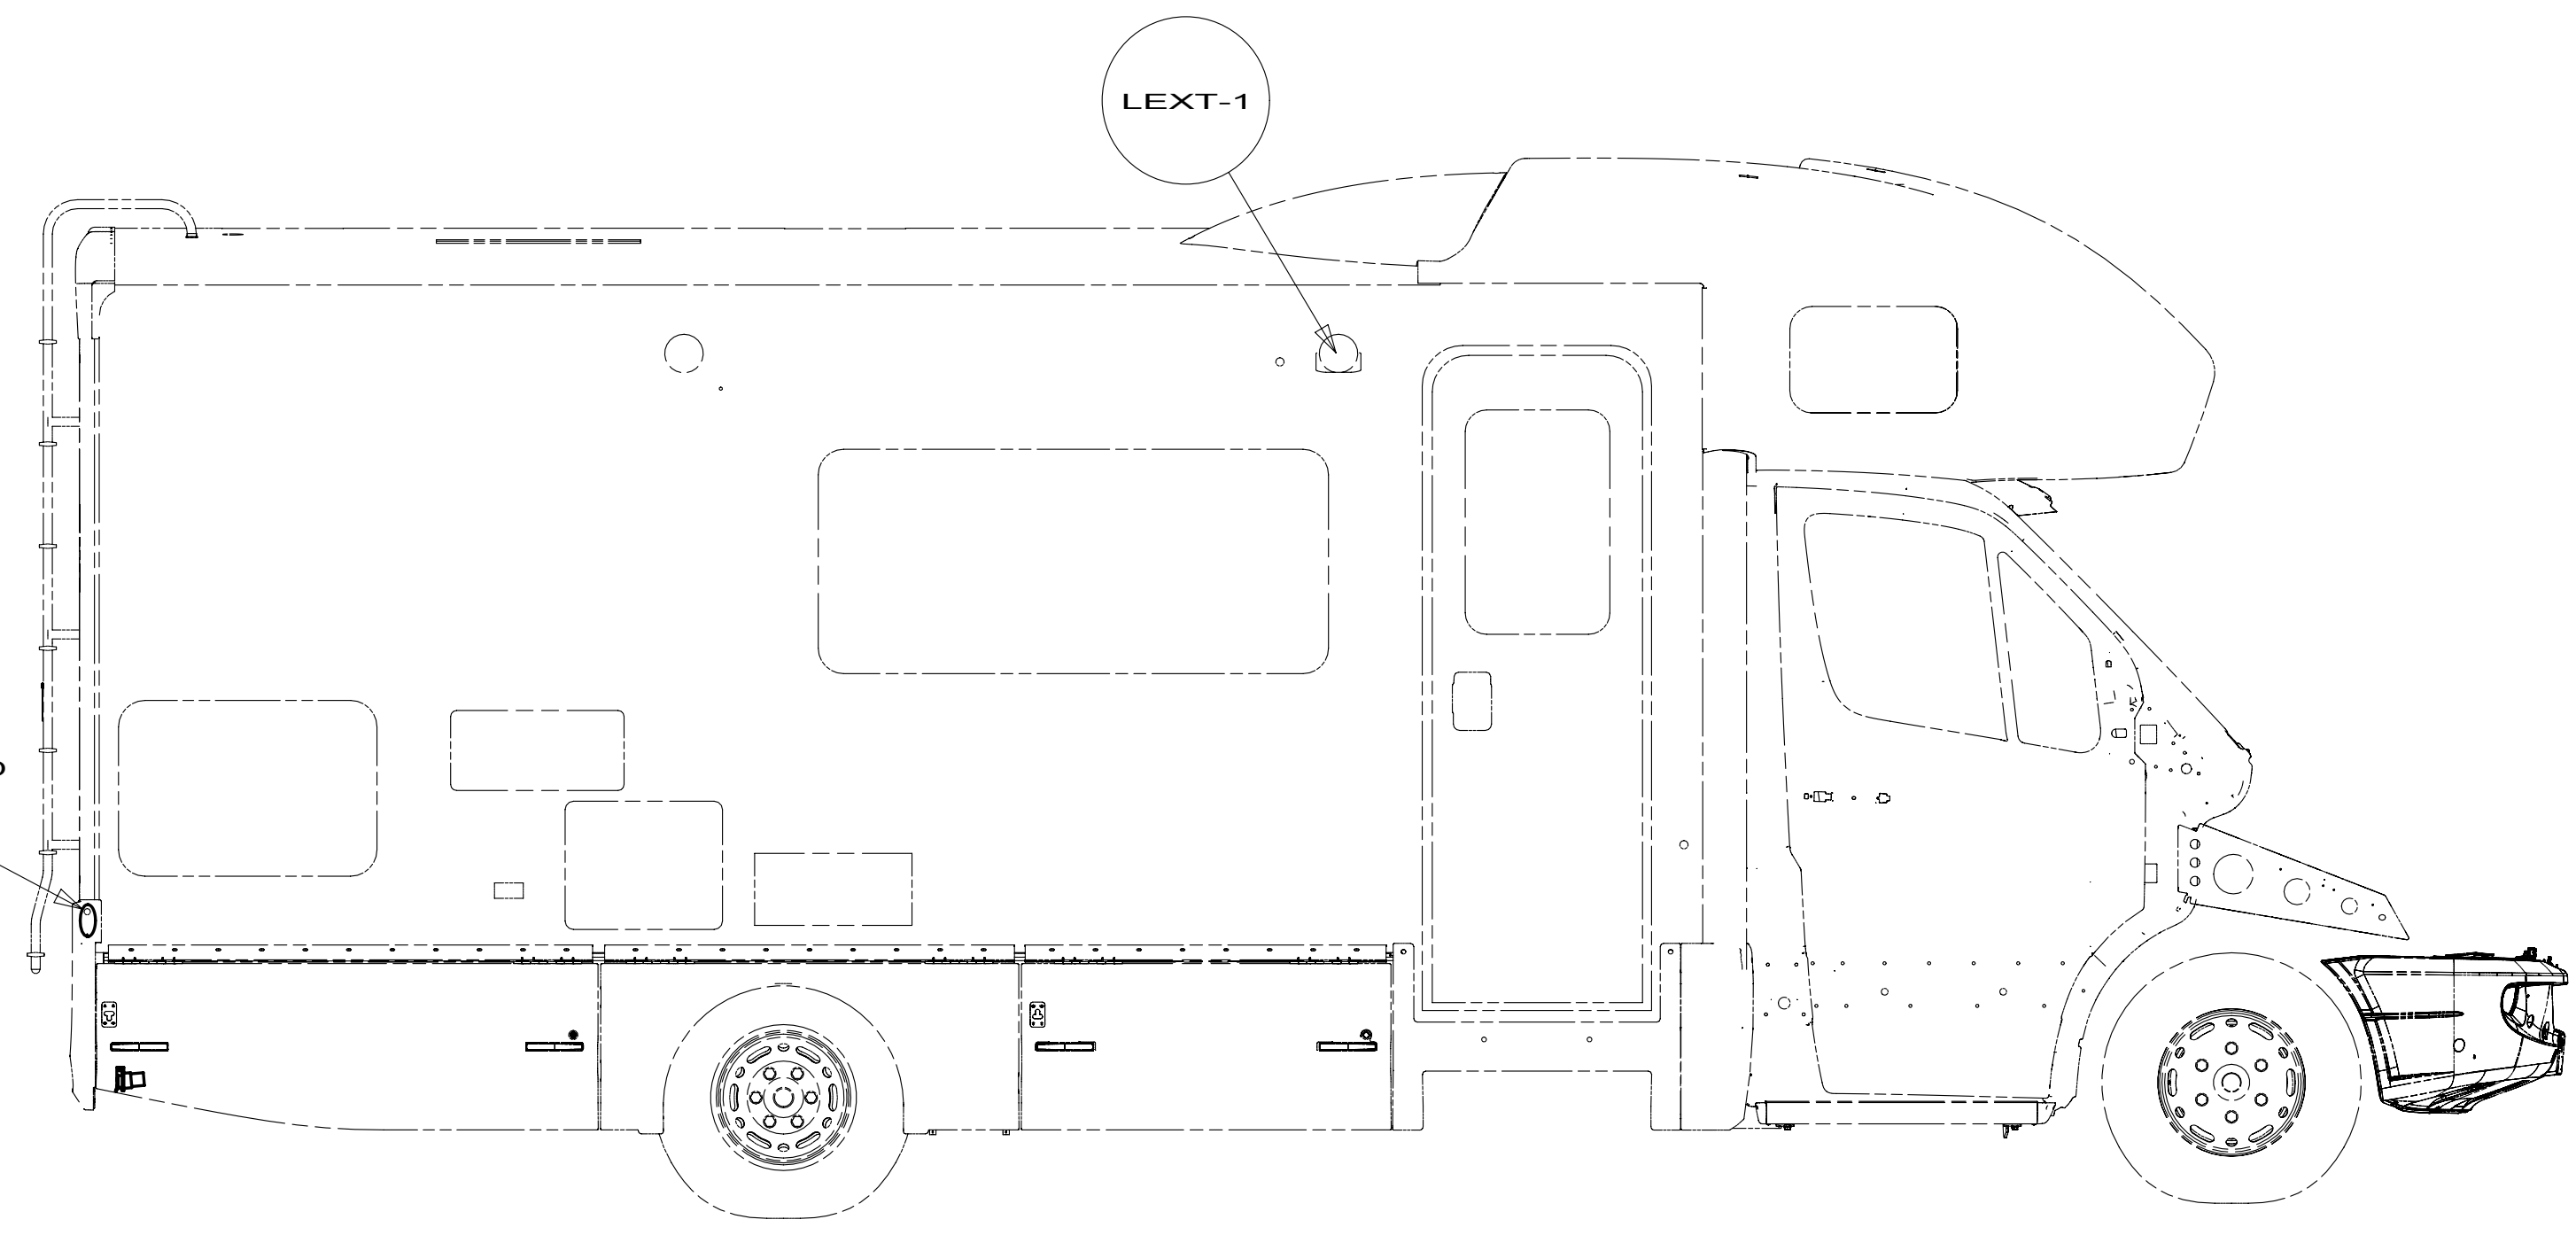

LAMP-MARKER, BASE  
147680-01-000  
LAMP ASM-CLEARANCE, RED  
147680-03-CHT  
SCREW  
G11-08-12T (EXT)(2)

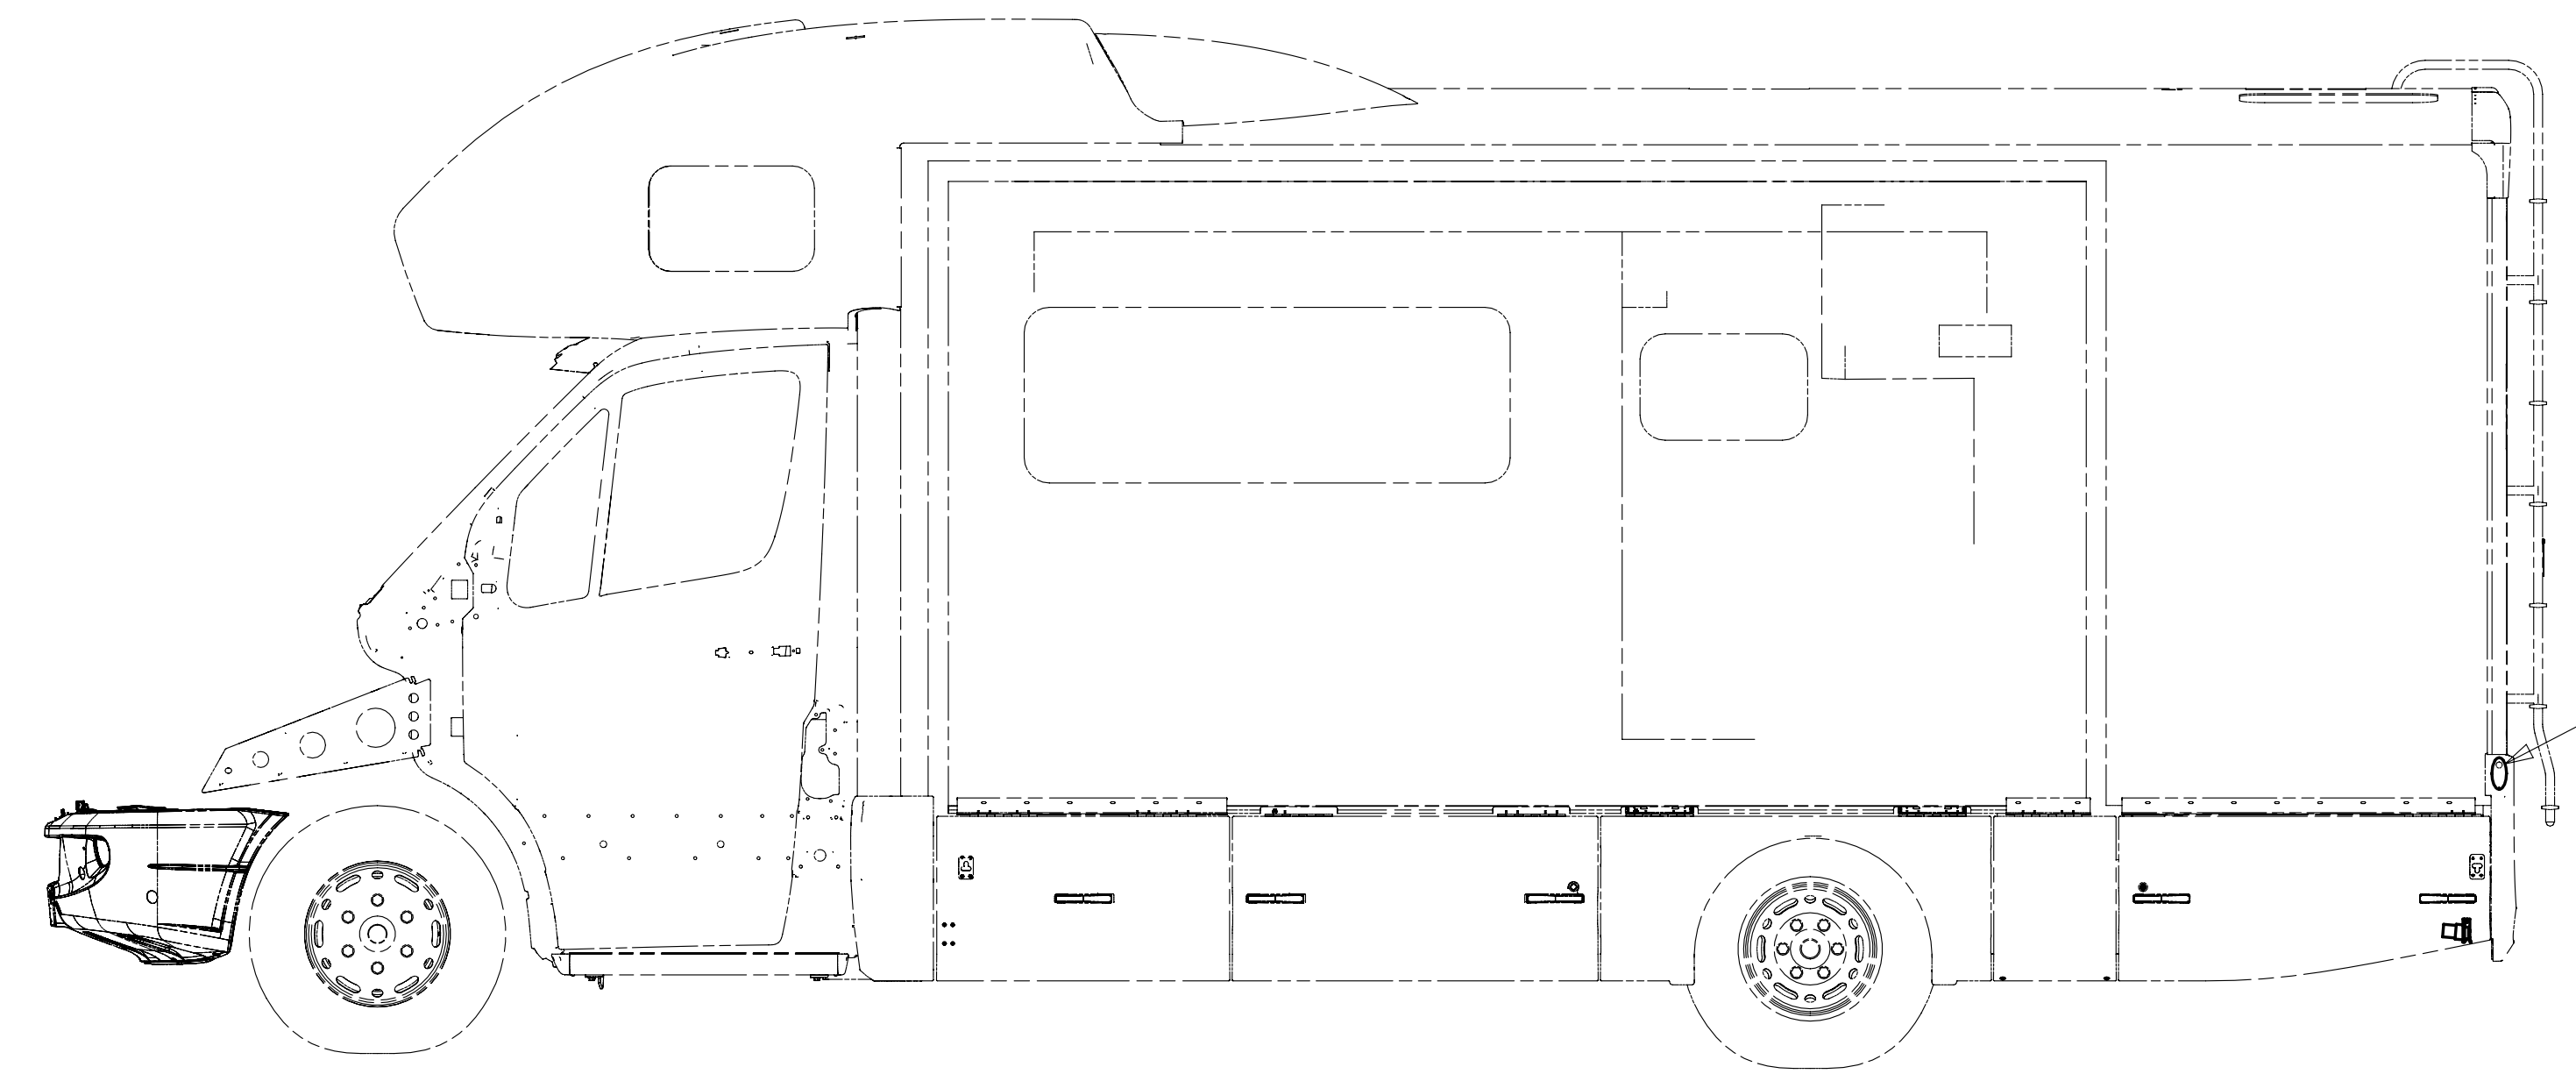

LAMP-MARKER, BASE  
147680-01-000  
LAMP ASM-CLEARANCE, RED  
147680-03-CHT  
SCREW  
G11-08-12T (EXT)(2)

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265



DTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	11 500-SERIES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	MATERIAL:
ONE-PLACE (X.X)	
TWO-PLACE (X.XX)	
ANGLE	
THIRD ANGLE PROJECTION	

DO NOT SCALE DRAWING


TITLE:  
**WIRING INSTL-EXTERIOR LAMPS**

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


WIRE ASM-CLEARANCE LAMPS  
152164-01-000

LAMP-CLEARANCE,AMBER  
132978-01-000 (5)  
SCREW  
G13-08-28B (10)  
BULB  
36196-01-000 (5)

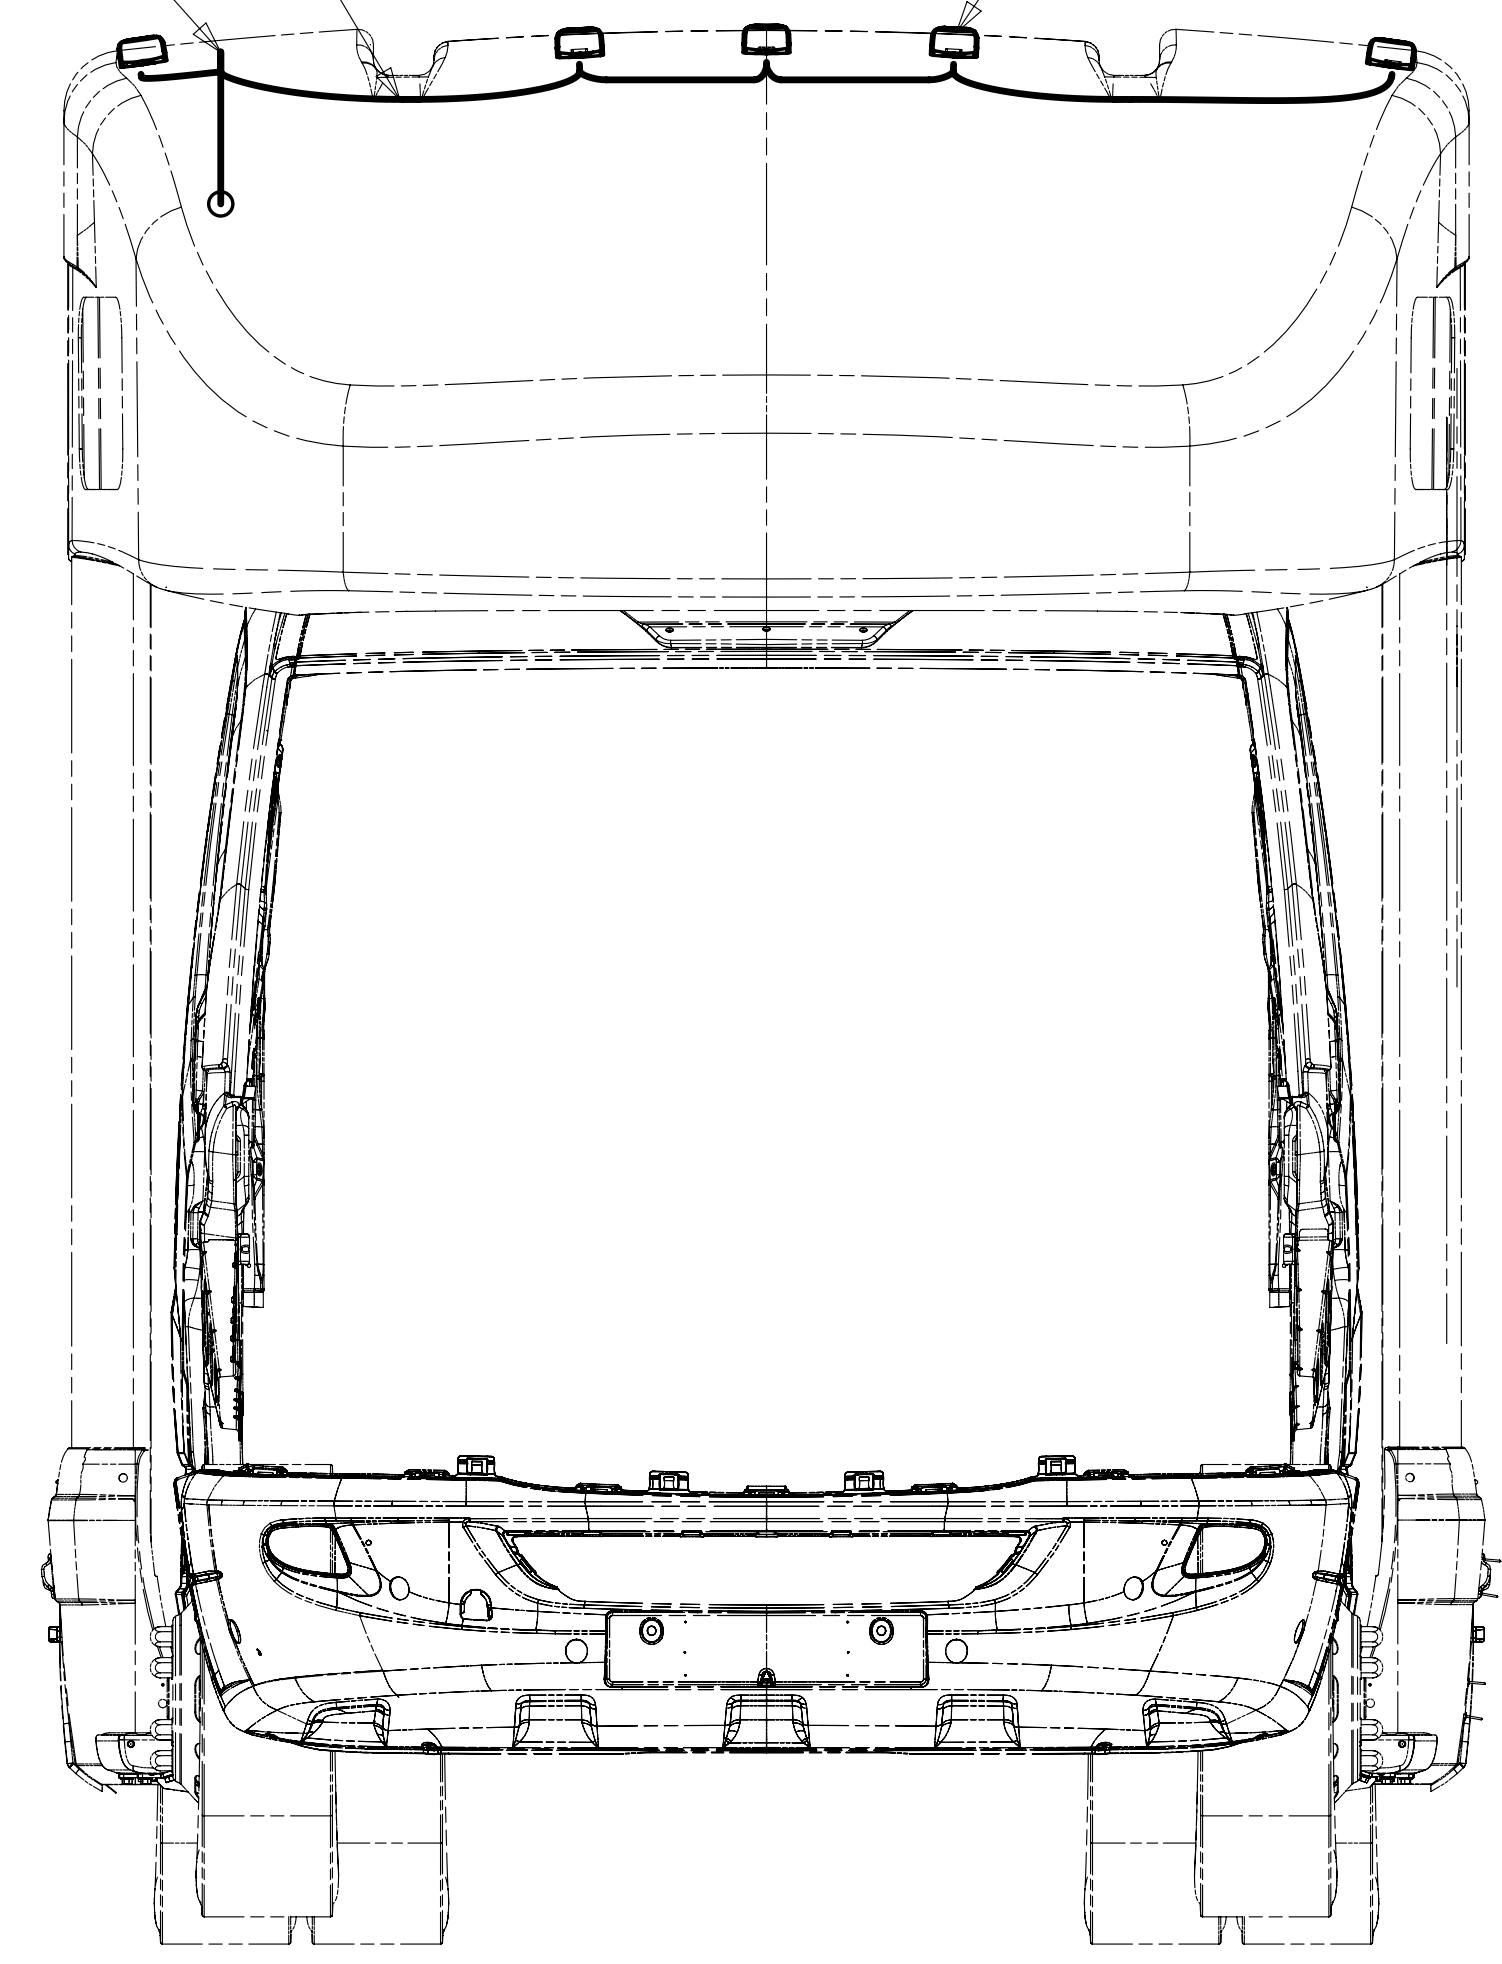

WIRE ASM-CLEARANCE LAMP  
162482-01-000

LAMP-MARKER  
147680-01-000 (5)  
LAMP ASM-CLEARANCE,RED  
147680-03-CHT (5)  
SCREW  
G11-08-12U (10)

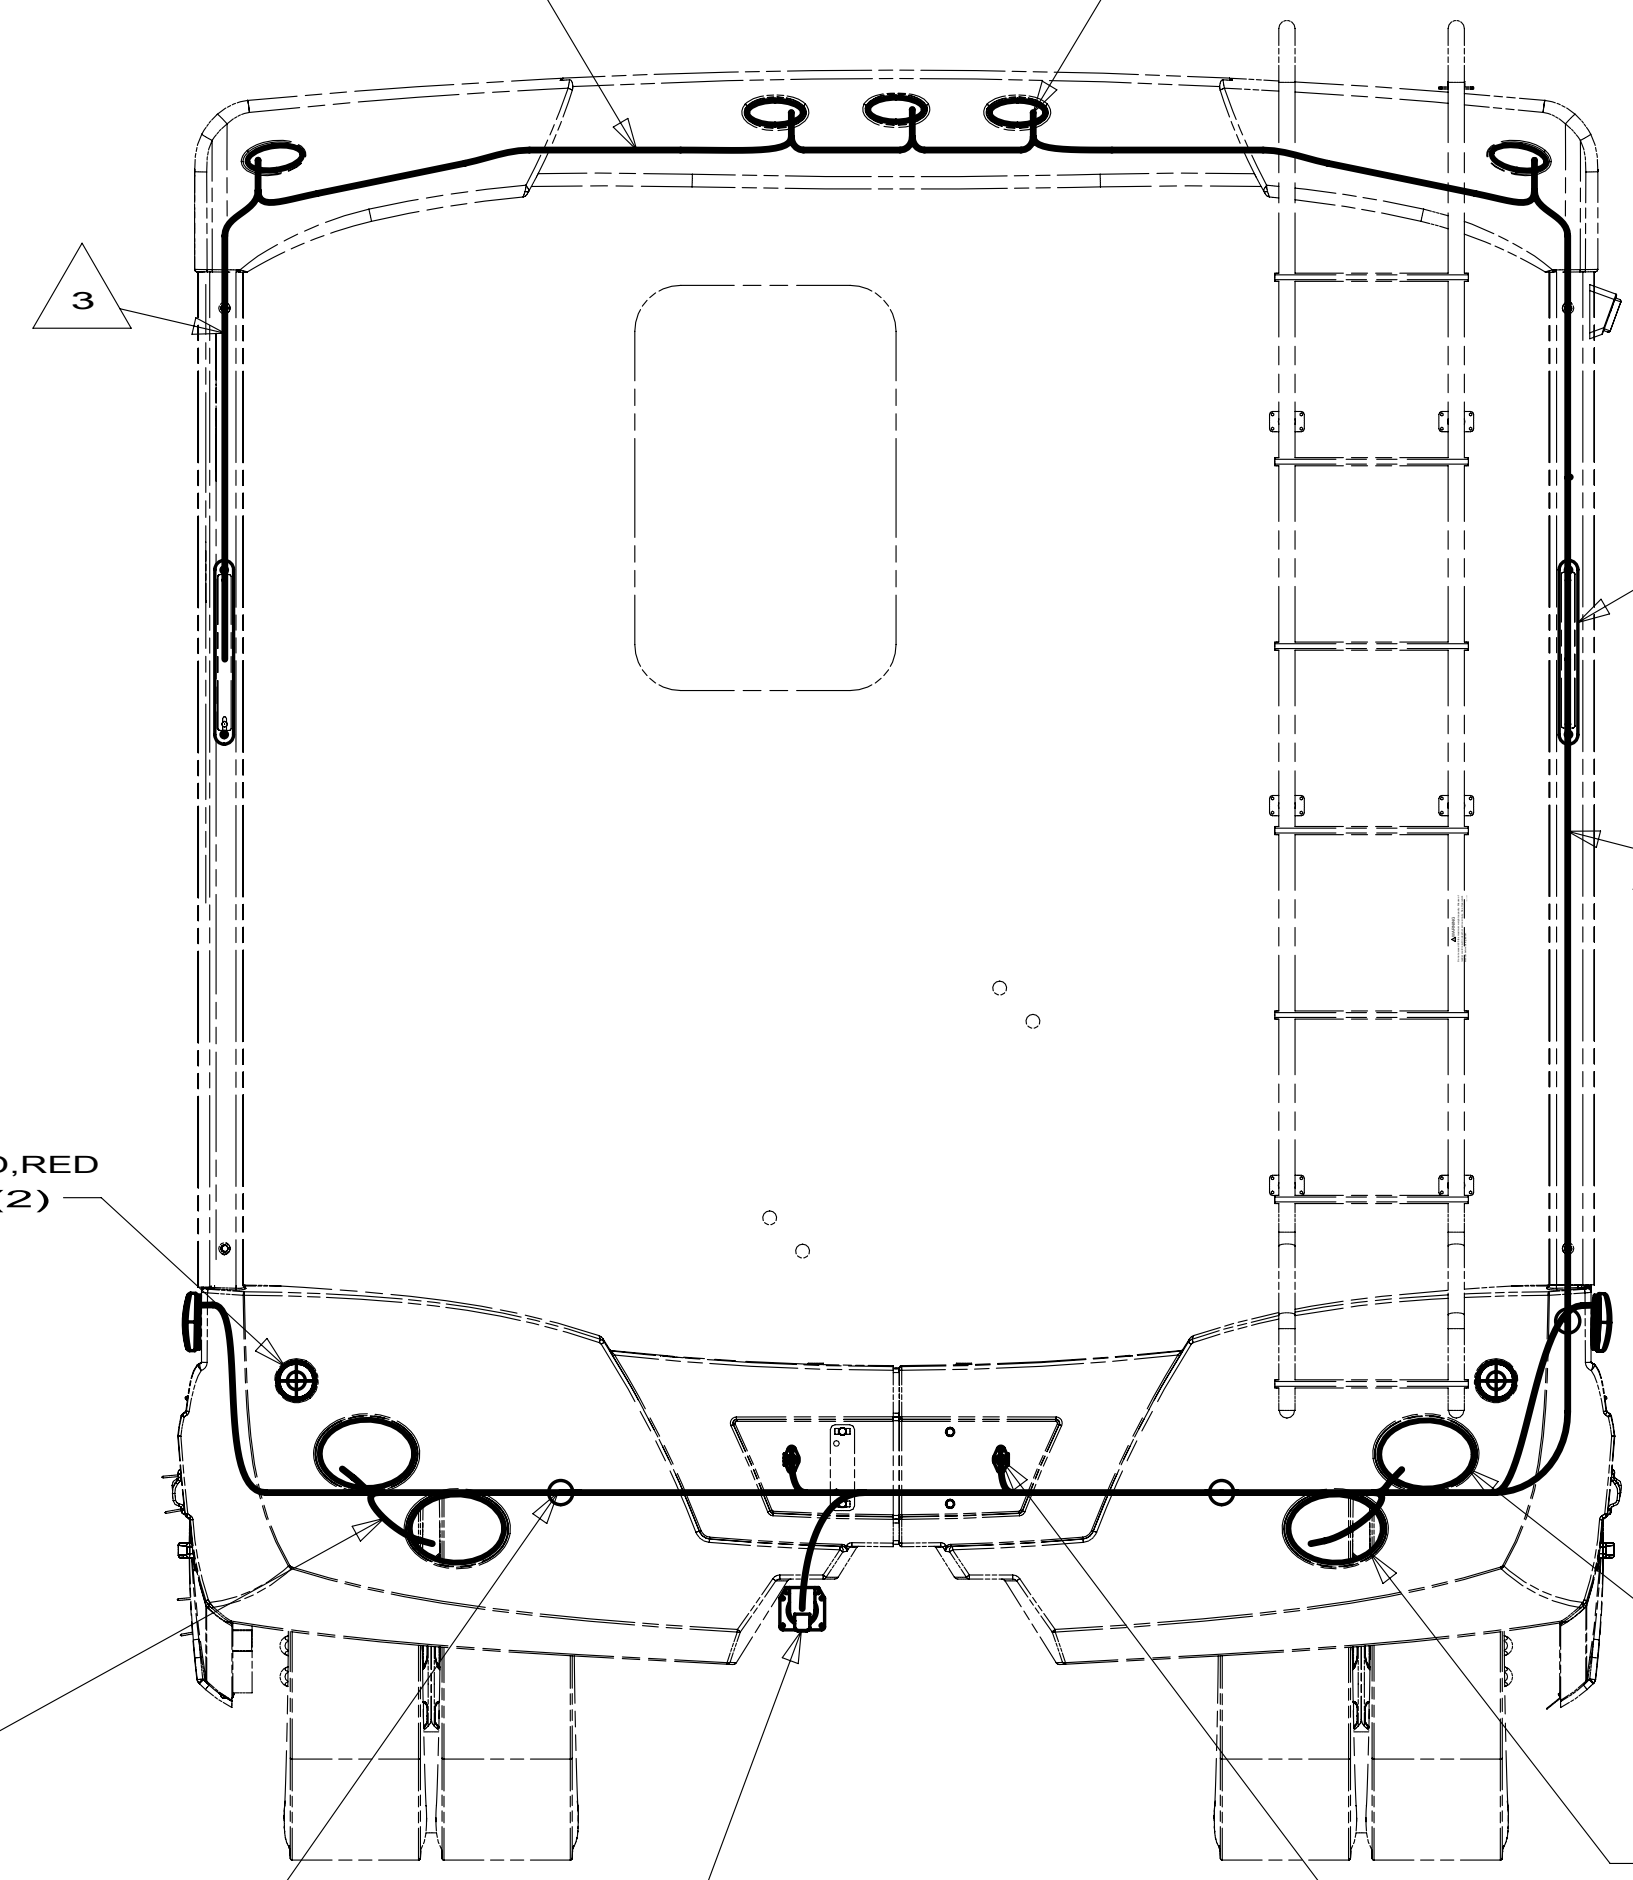

LIGHT ASM-BRAKE  
CENTER MOUNT  
151076-01-000 (2)  
SCREW  
G39-08-08T

REFLECTOR-ROUND,RED  
141514-01-000 (2)

LAMP ASM-TURN  
152070-02-000 (2)  
BRACKET  
151934-01-CHT (2)

WIRE ASM-TAILLAMP  
175274-01-000

LAMP ASM-BACKUP/STOP  
152070-01-000 (2)  
BRACKET  
151934-01-CHT (2)

TRAILER PLUG ASM  
(CHASSIS SUPPLIED)  
SCREW  
101618-01-000 (4)

LIGHT-LICENSE  
87201-01-000 (2)  
SCREW  
G11-06-12U (EXT)(4)

4 REMOVE EXTENSION LOOMS THAT ARE SUPPLIED WITH CHASSIS. THE CHASSIS IS SUPPLIED WITH TWO 7-PIN CONNECTORS ALONG THE LEFT SIDE FRAME RAIL. THE CHASSIS WIRING WITH THE TWO 7-PIN CONNECTORS HAS A LONGER DROP AND A SHORTER DROP. ATTACH THE LONGER DROP TO THE WIRE ASM-TAILLAMP CONNECTOR WITH ONLY 2 PINS IN IT. ATTACH THE SHORTER DROP TO THE WIRE ASM-TAILLAMP CONNECTOR WITH 5 PINS.

3 RUN WIRE THROUGH THE INSIDE OF ALUMINUM EXTRUSION.

2 SECURE WIRE BELOW COACH WITH CLAMP 10495-01-000 AND SCREW G67-10-12B.

1 CONNECTOR-PLUG, TRAILER 146246-01-000 TO BE SUPPLIED LOOSE IN COACH WITH TRAILER TOW PACKAGE.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

11 500-SERIES

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-EXTERIOR LAMPS

SHEET 2 PART NO. 175273 REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000