








DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.

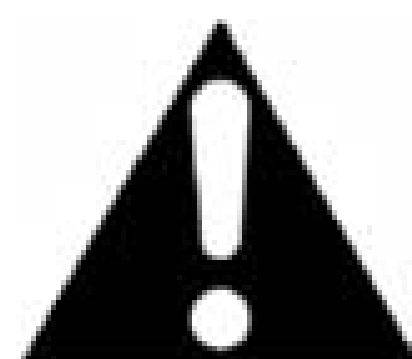

CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

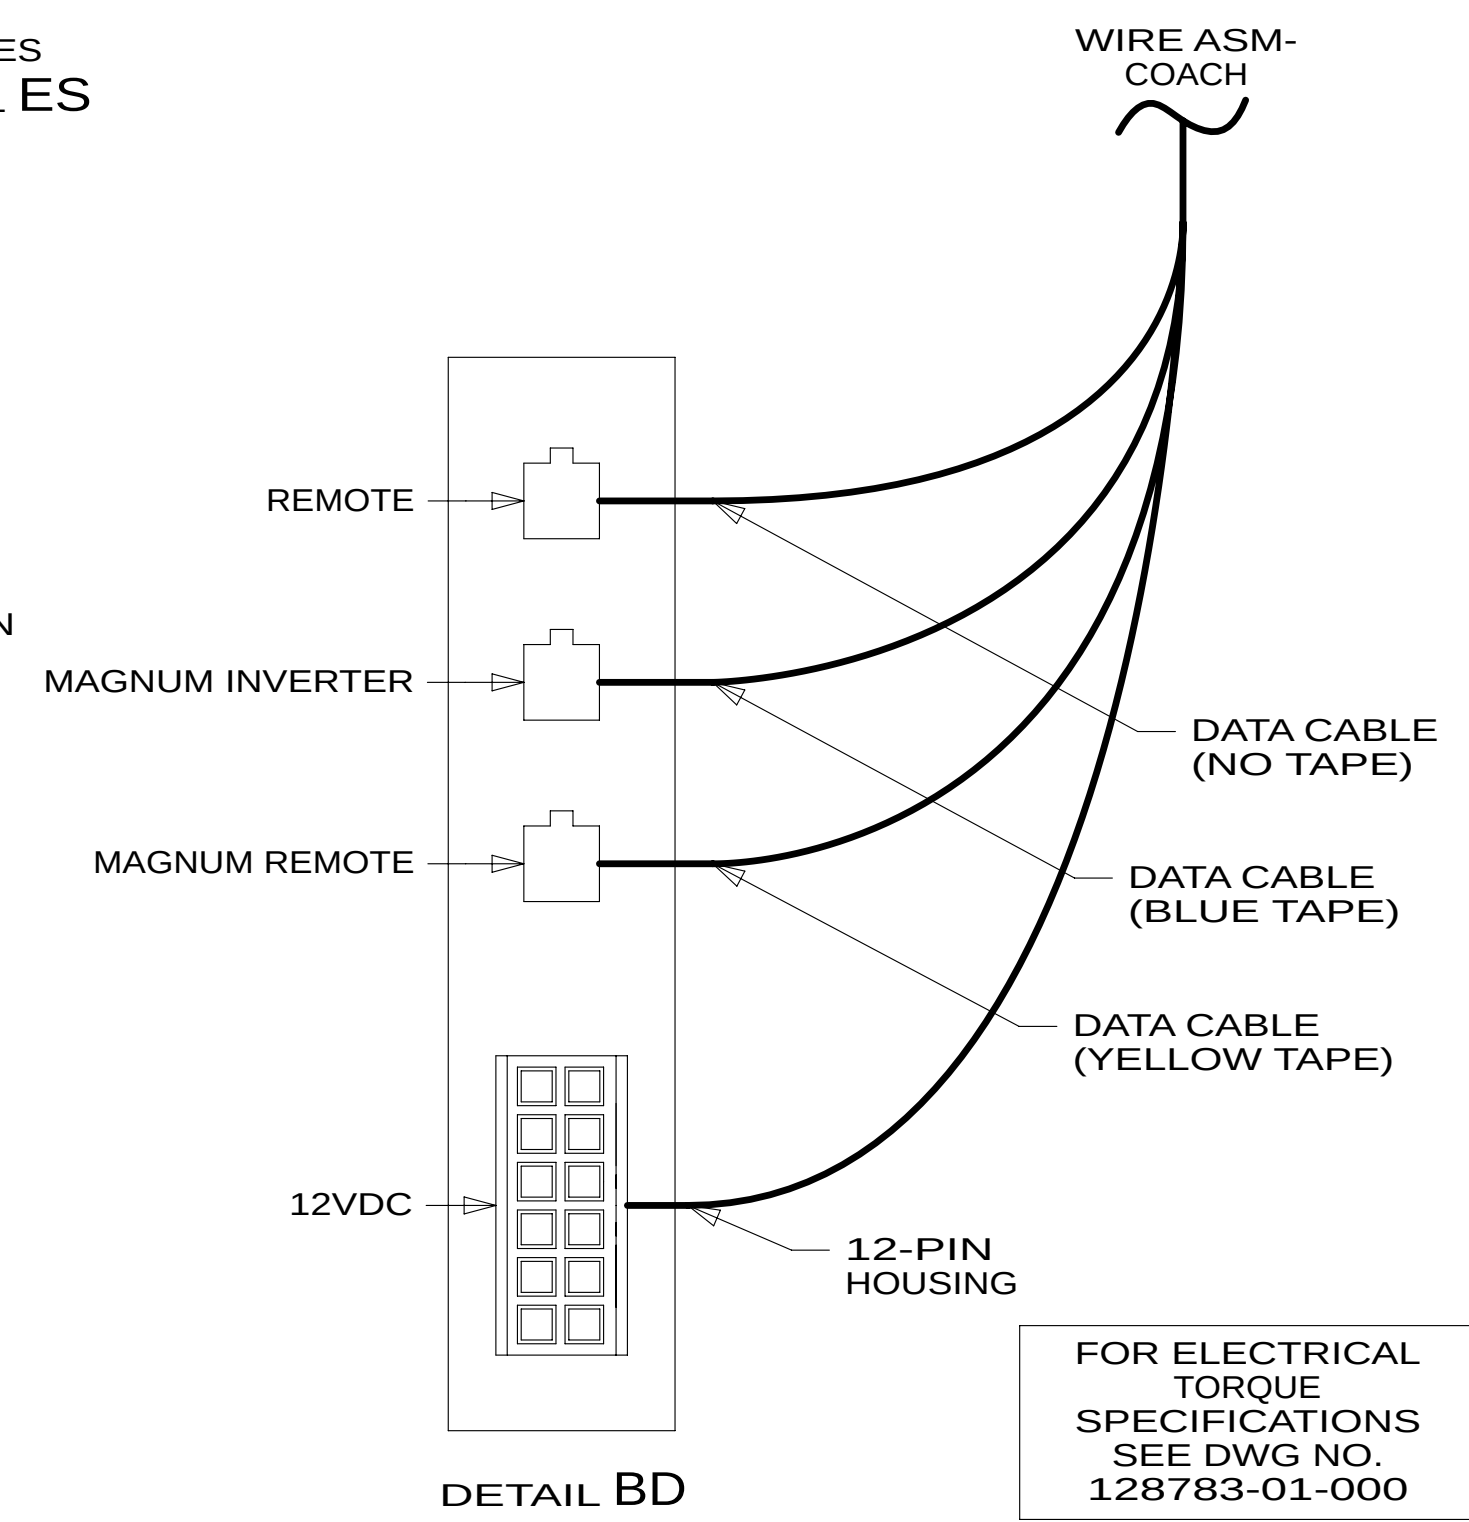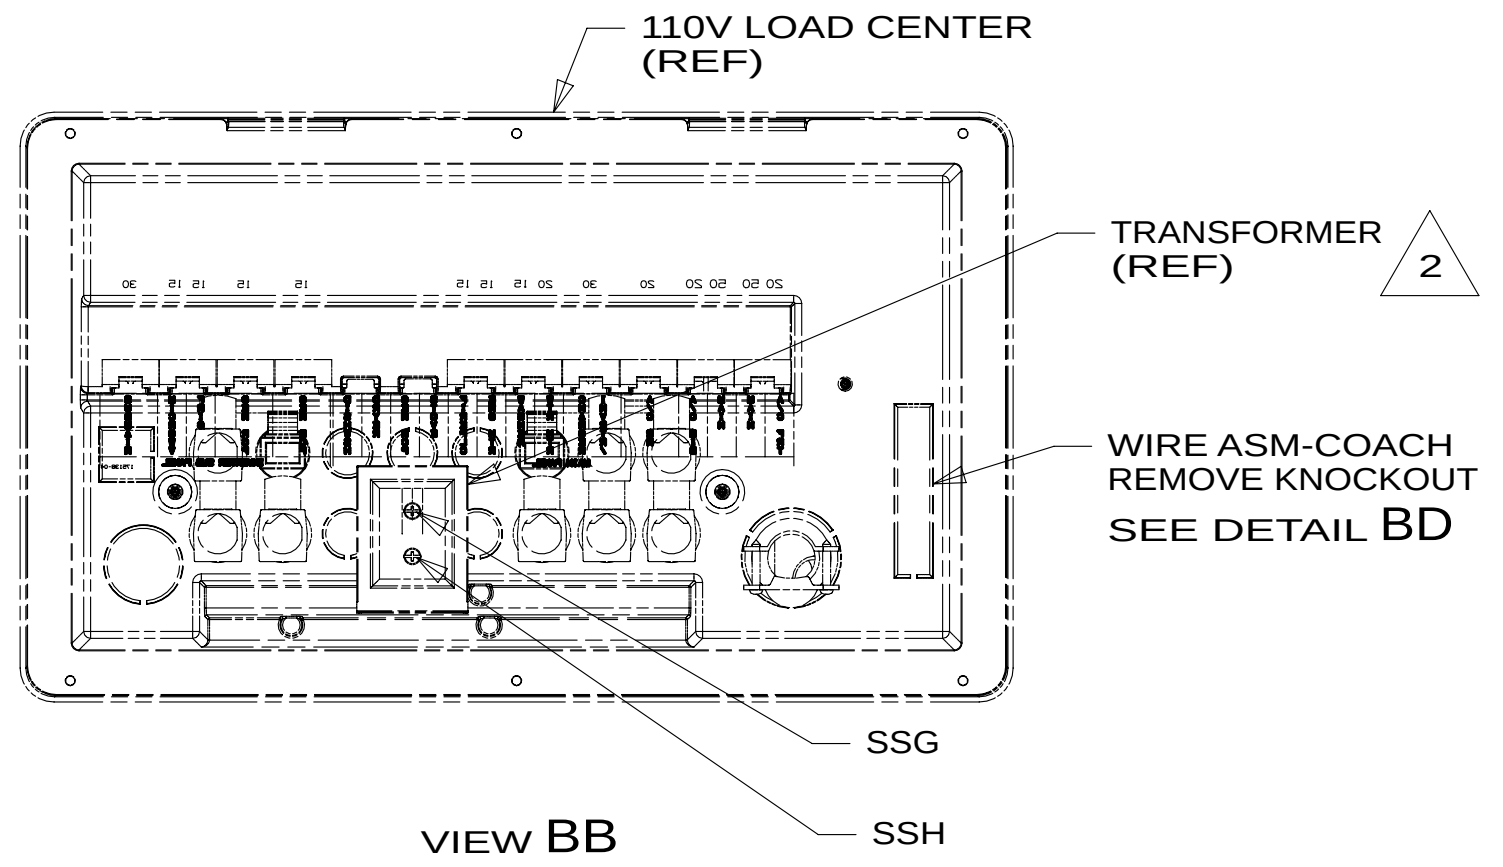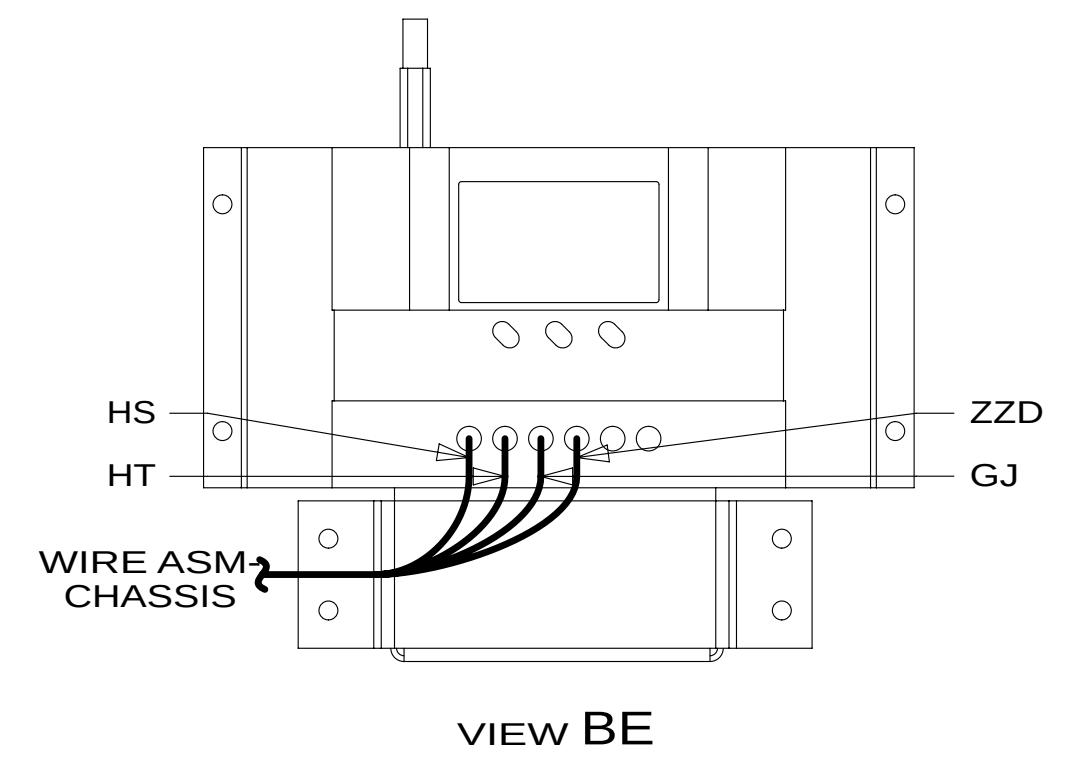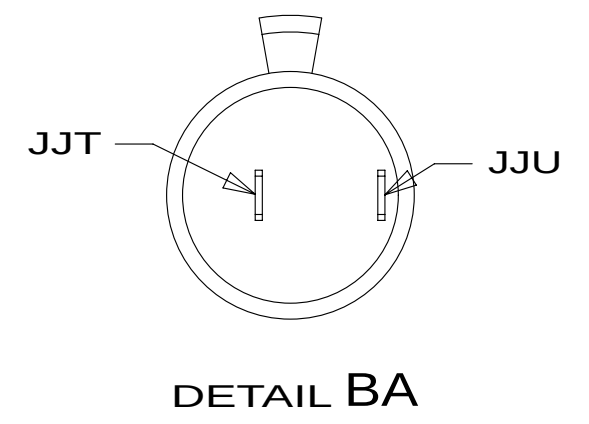

- 12M LPG SYSTEM
- ITA ITASCA ONLY
- WIN WINNEBAGO ONLY
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
13 R42QD		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 2	PART NO 180442	REV


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 3 MOUNT SPEAKER TO REAR OF CABINET FACE.
- 2 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

*180442 *A

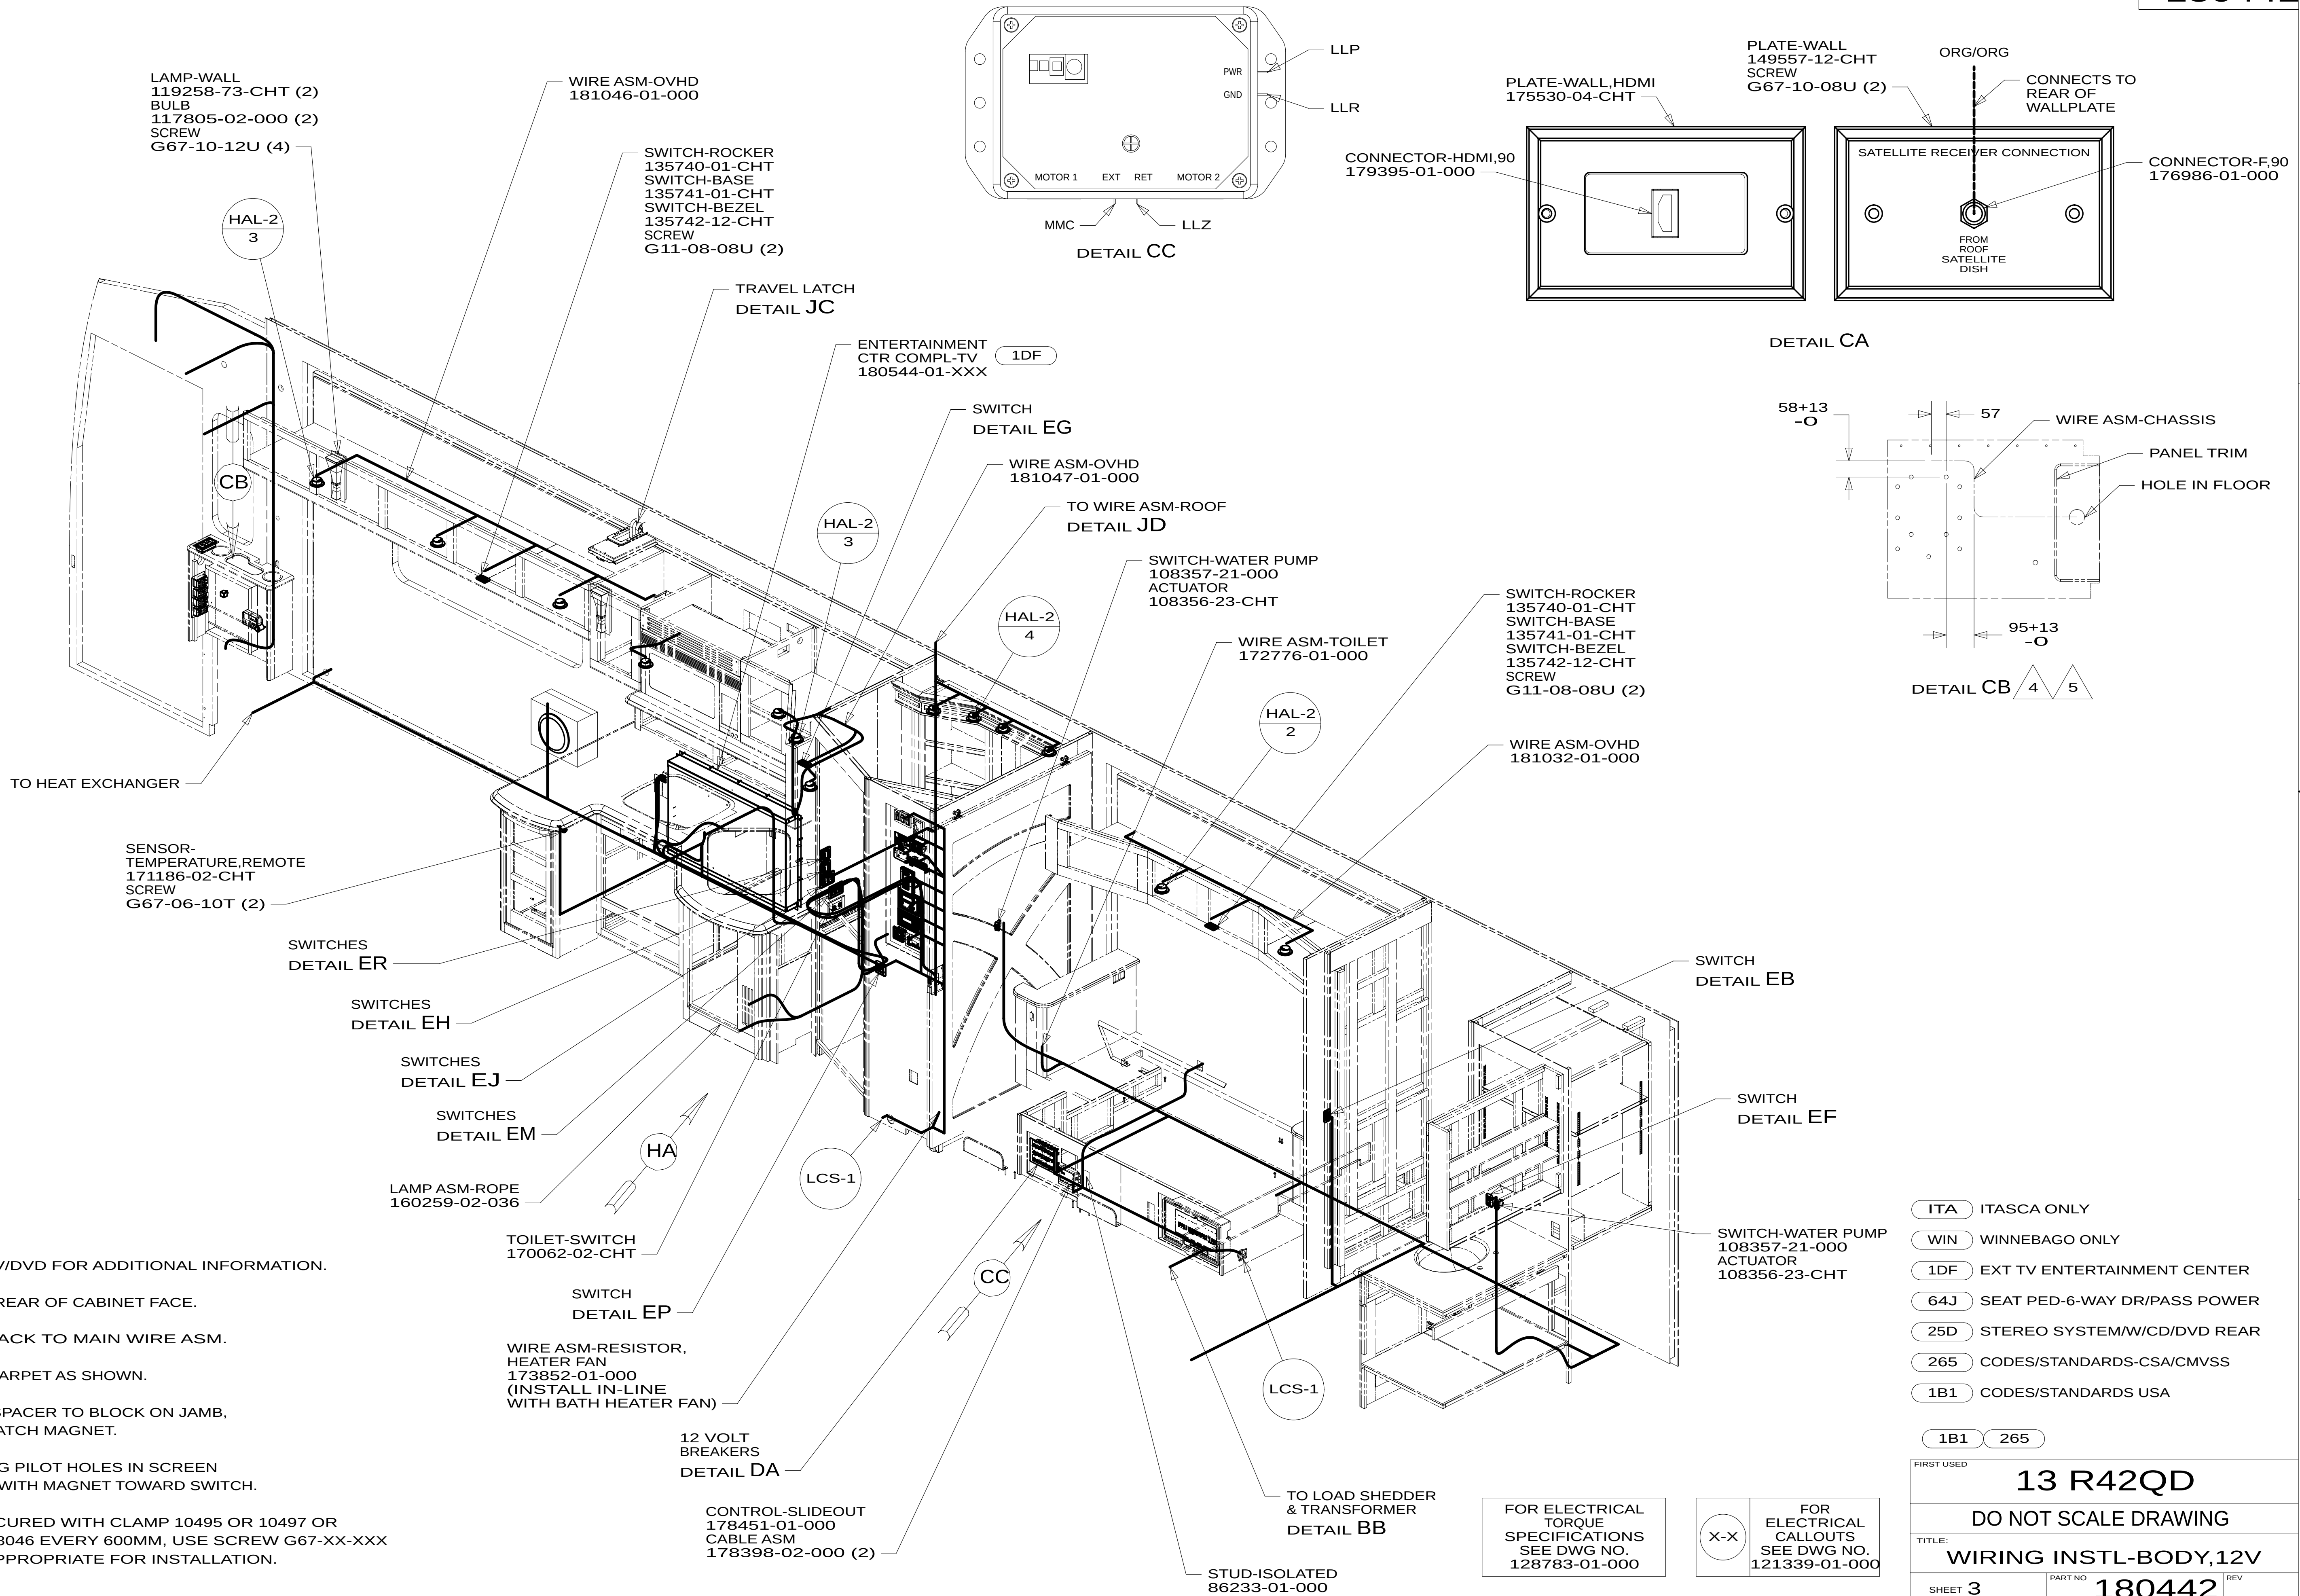

- 7 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
- 6 MOUNT SPEAKER TO REAR OF CABINET FACE.
- 5 WITHOUT 64J TIE BACK TO MAIN WIRE ASM.
- 4 ROUTE WIRE UNDER CARPET AS SHOWN.
- 3 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB, ADJUST HEIGHT TO MATCH MAGNET.
- 2 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

- ITA ITASCA ONLY
- WIN WINNEBAGO ONLY
- 1DF EXT TV ENTERTAINMENT CENTER
- 64J SEAT PED-6-WAY DR/PASS POWER
- 25D STEREO SYSTEM/W/CD/DVD REAR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

FIRST USED

13 R42QD

DO NOT SCALE DRAWING


TITLE: WIRING INSTL-BODY,12V

SHEET 3 PART NO 180442 REV

15-Apr-2013

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

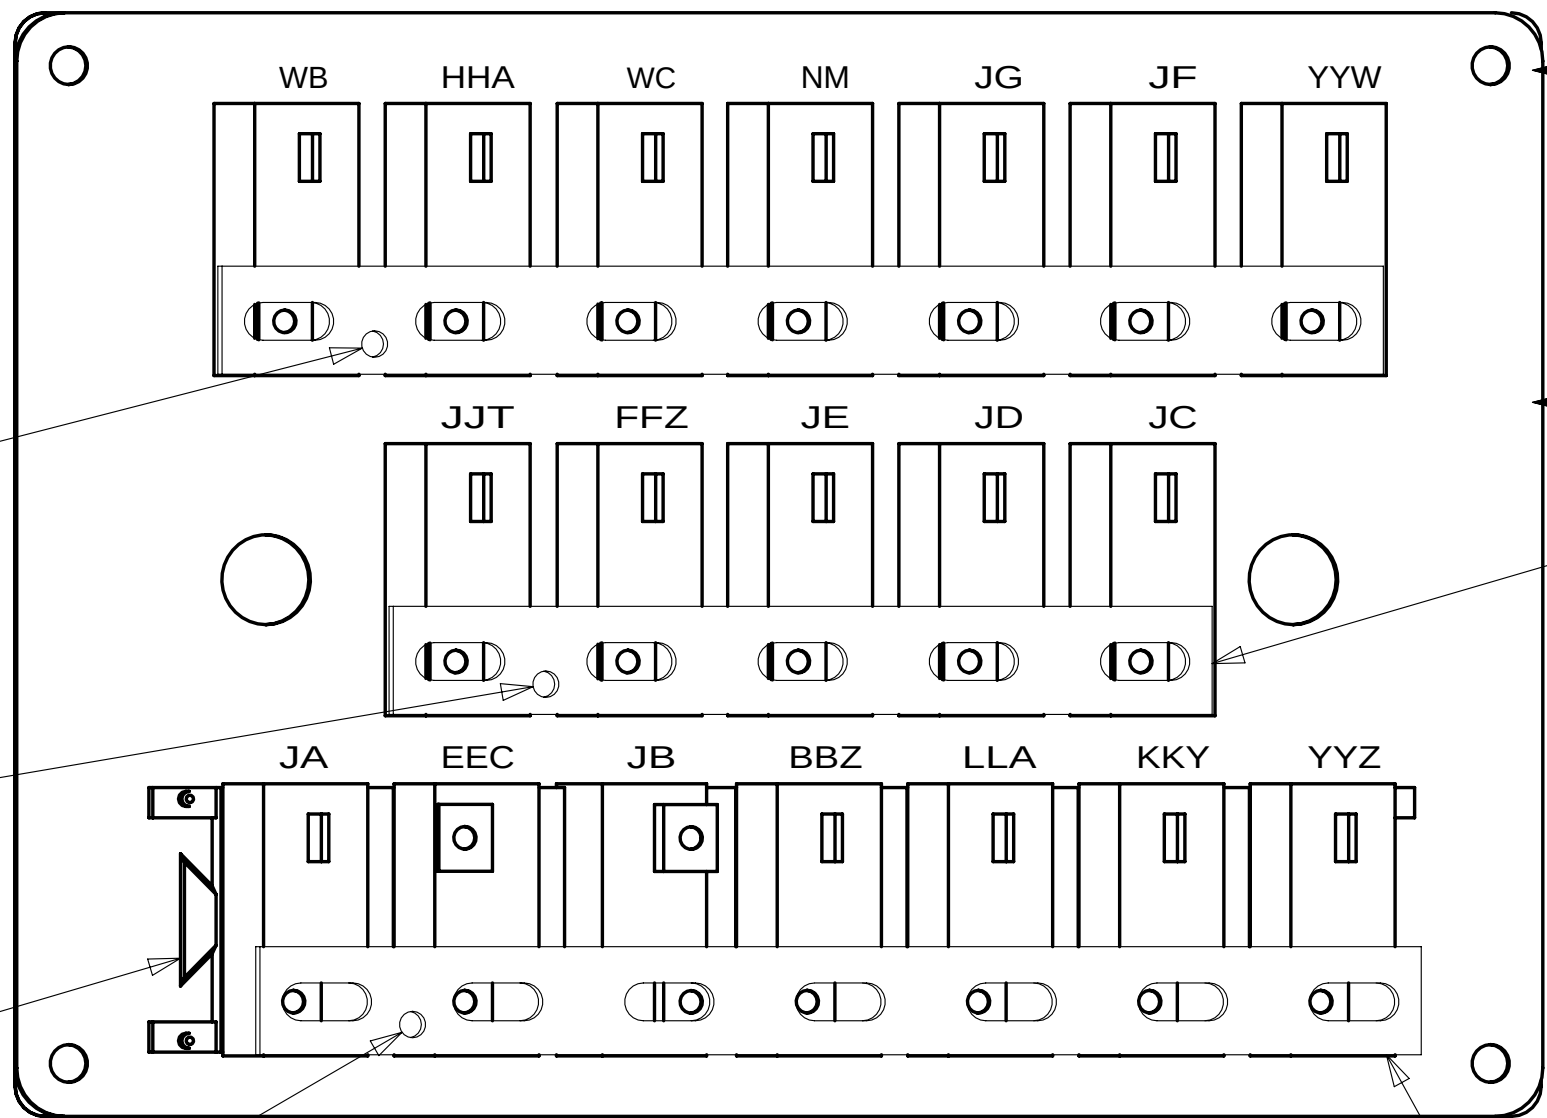

J
6 BLK
FROM WIRE
ASM-BREAKERS
SCREW
G39-08-06B


K
6 BLK
FROM WIRE
ASM-BREAKERS
SCREW
G39-08-06B

SPACER
141789-01-000 (6)

Z
6 BLK
FROM WIRE
ASM-BREAKERS
SCREW
G39-08-06B

BUSS BAR
141744-04-000
SCREW
G39-08-06B

BUSS BAR
141744-06-000 (2)
SCREW
G39-08-06B (2)

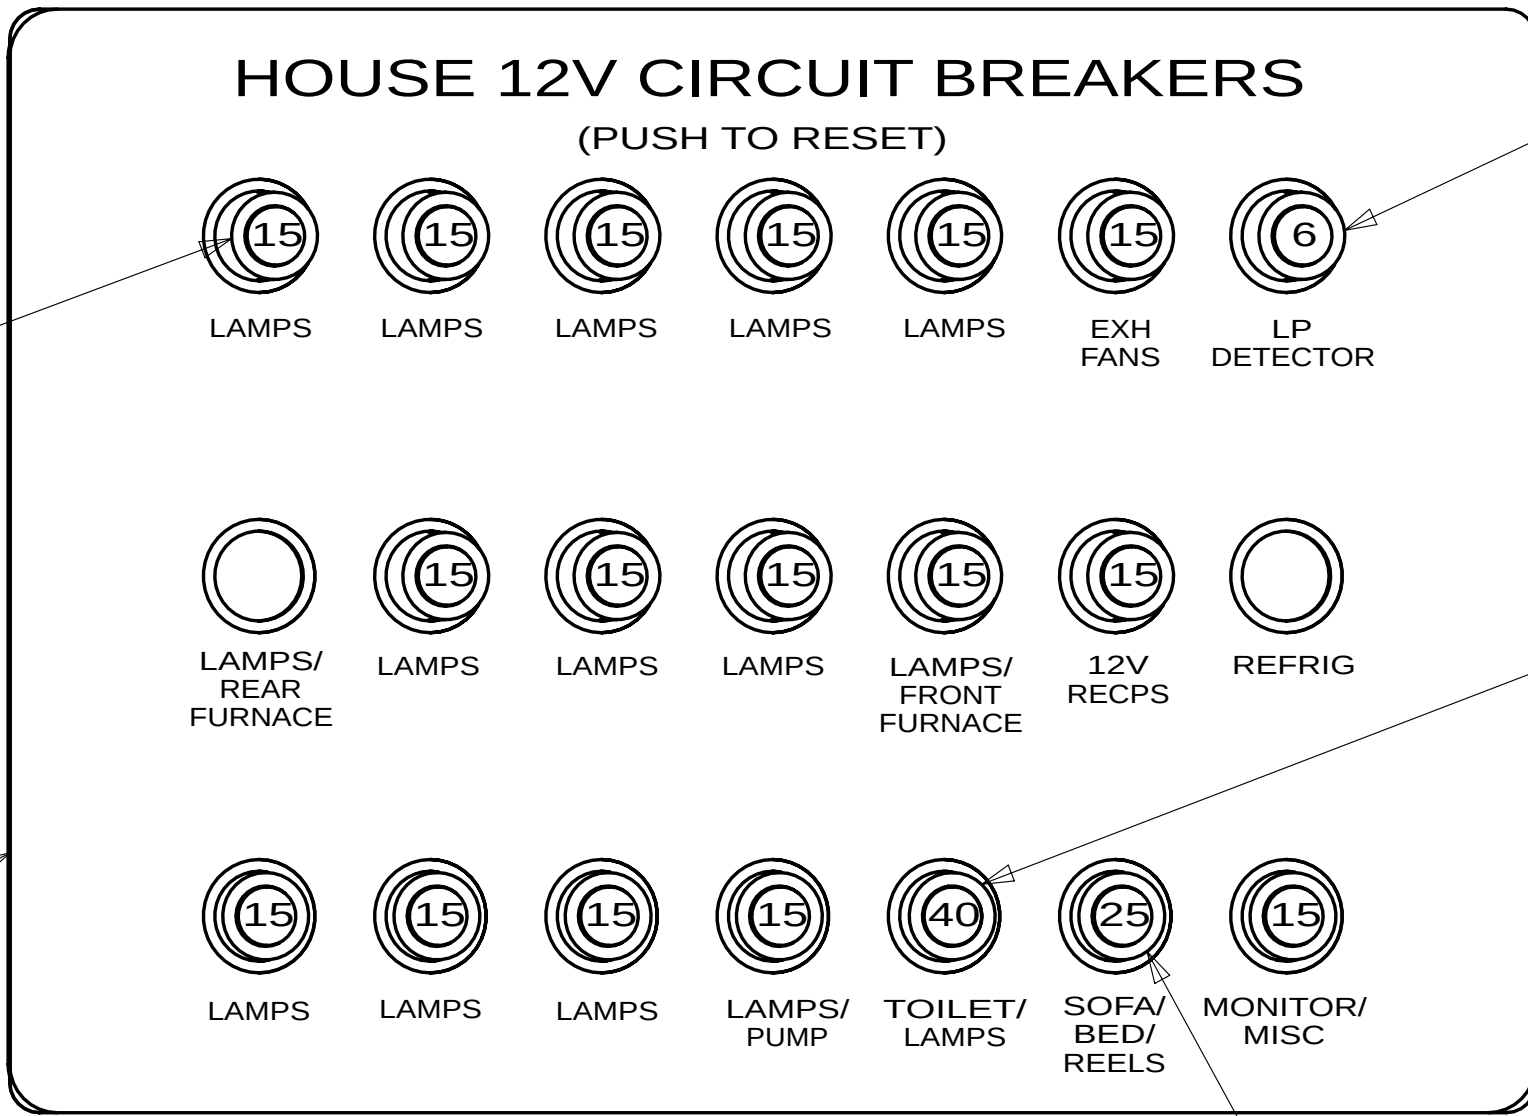

CIRCUIT BREAKER
93654-02-000 (16)
(15 AMP)
SCREW
G52-06-04B (16)


PLATE
139067-07-CHT
LABEL
92547-18-000
SCREW
G11-10-12U (4)

CIRCUIT BREAKER
93654-01-000
(6 AMP)
SCREW
G52-06-04B

CIRCUIT BREAKER
93655-03-000
(40 AMP)
SCREW
G52-06-04B

CIRCUIT BREAKER
93655-01-000
(25 AMP)
SCREW
G52-06-04B
WASHER
OME02B


DETAIL DA
(FRONT VIEW)

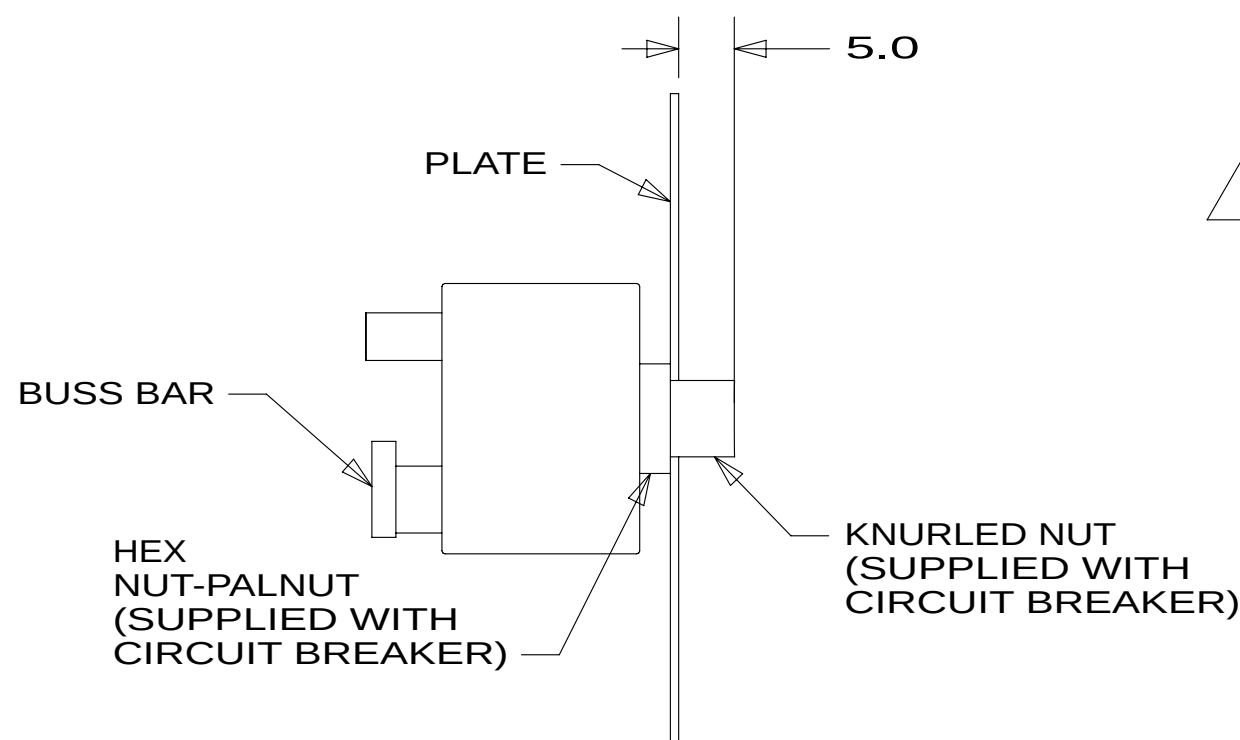

- 4 SCREW RELAY HOUSING TO SIDEWALL WITH SCREW G11-10-12U.
- 3 WITH SWITCH INSTALLED, THIS SIDE OF SWITCH WILL FACE LEFT SIDEWALL.
- 2 DETAIL IS LOOKING AT SWITCH FROM THE BACKSIDE OF SWITCH WHEN IT IS INSTALLED.

1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

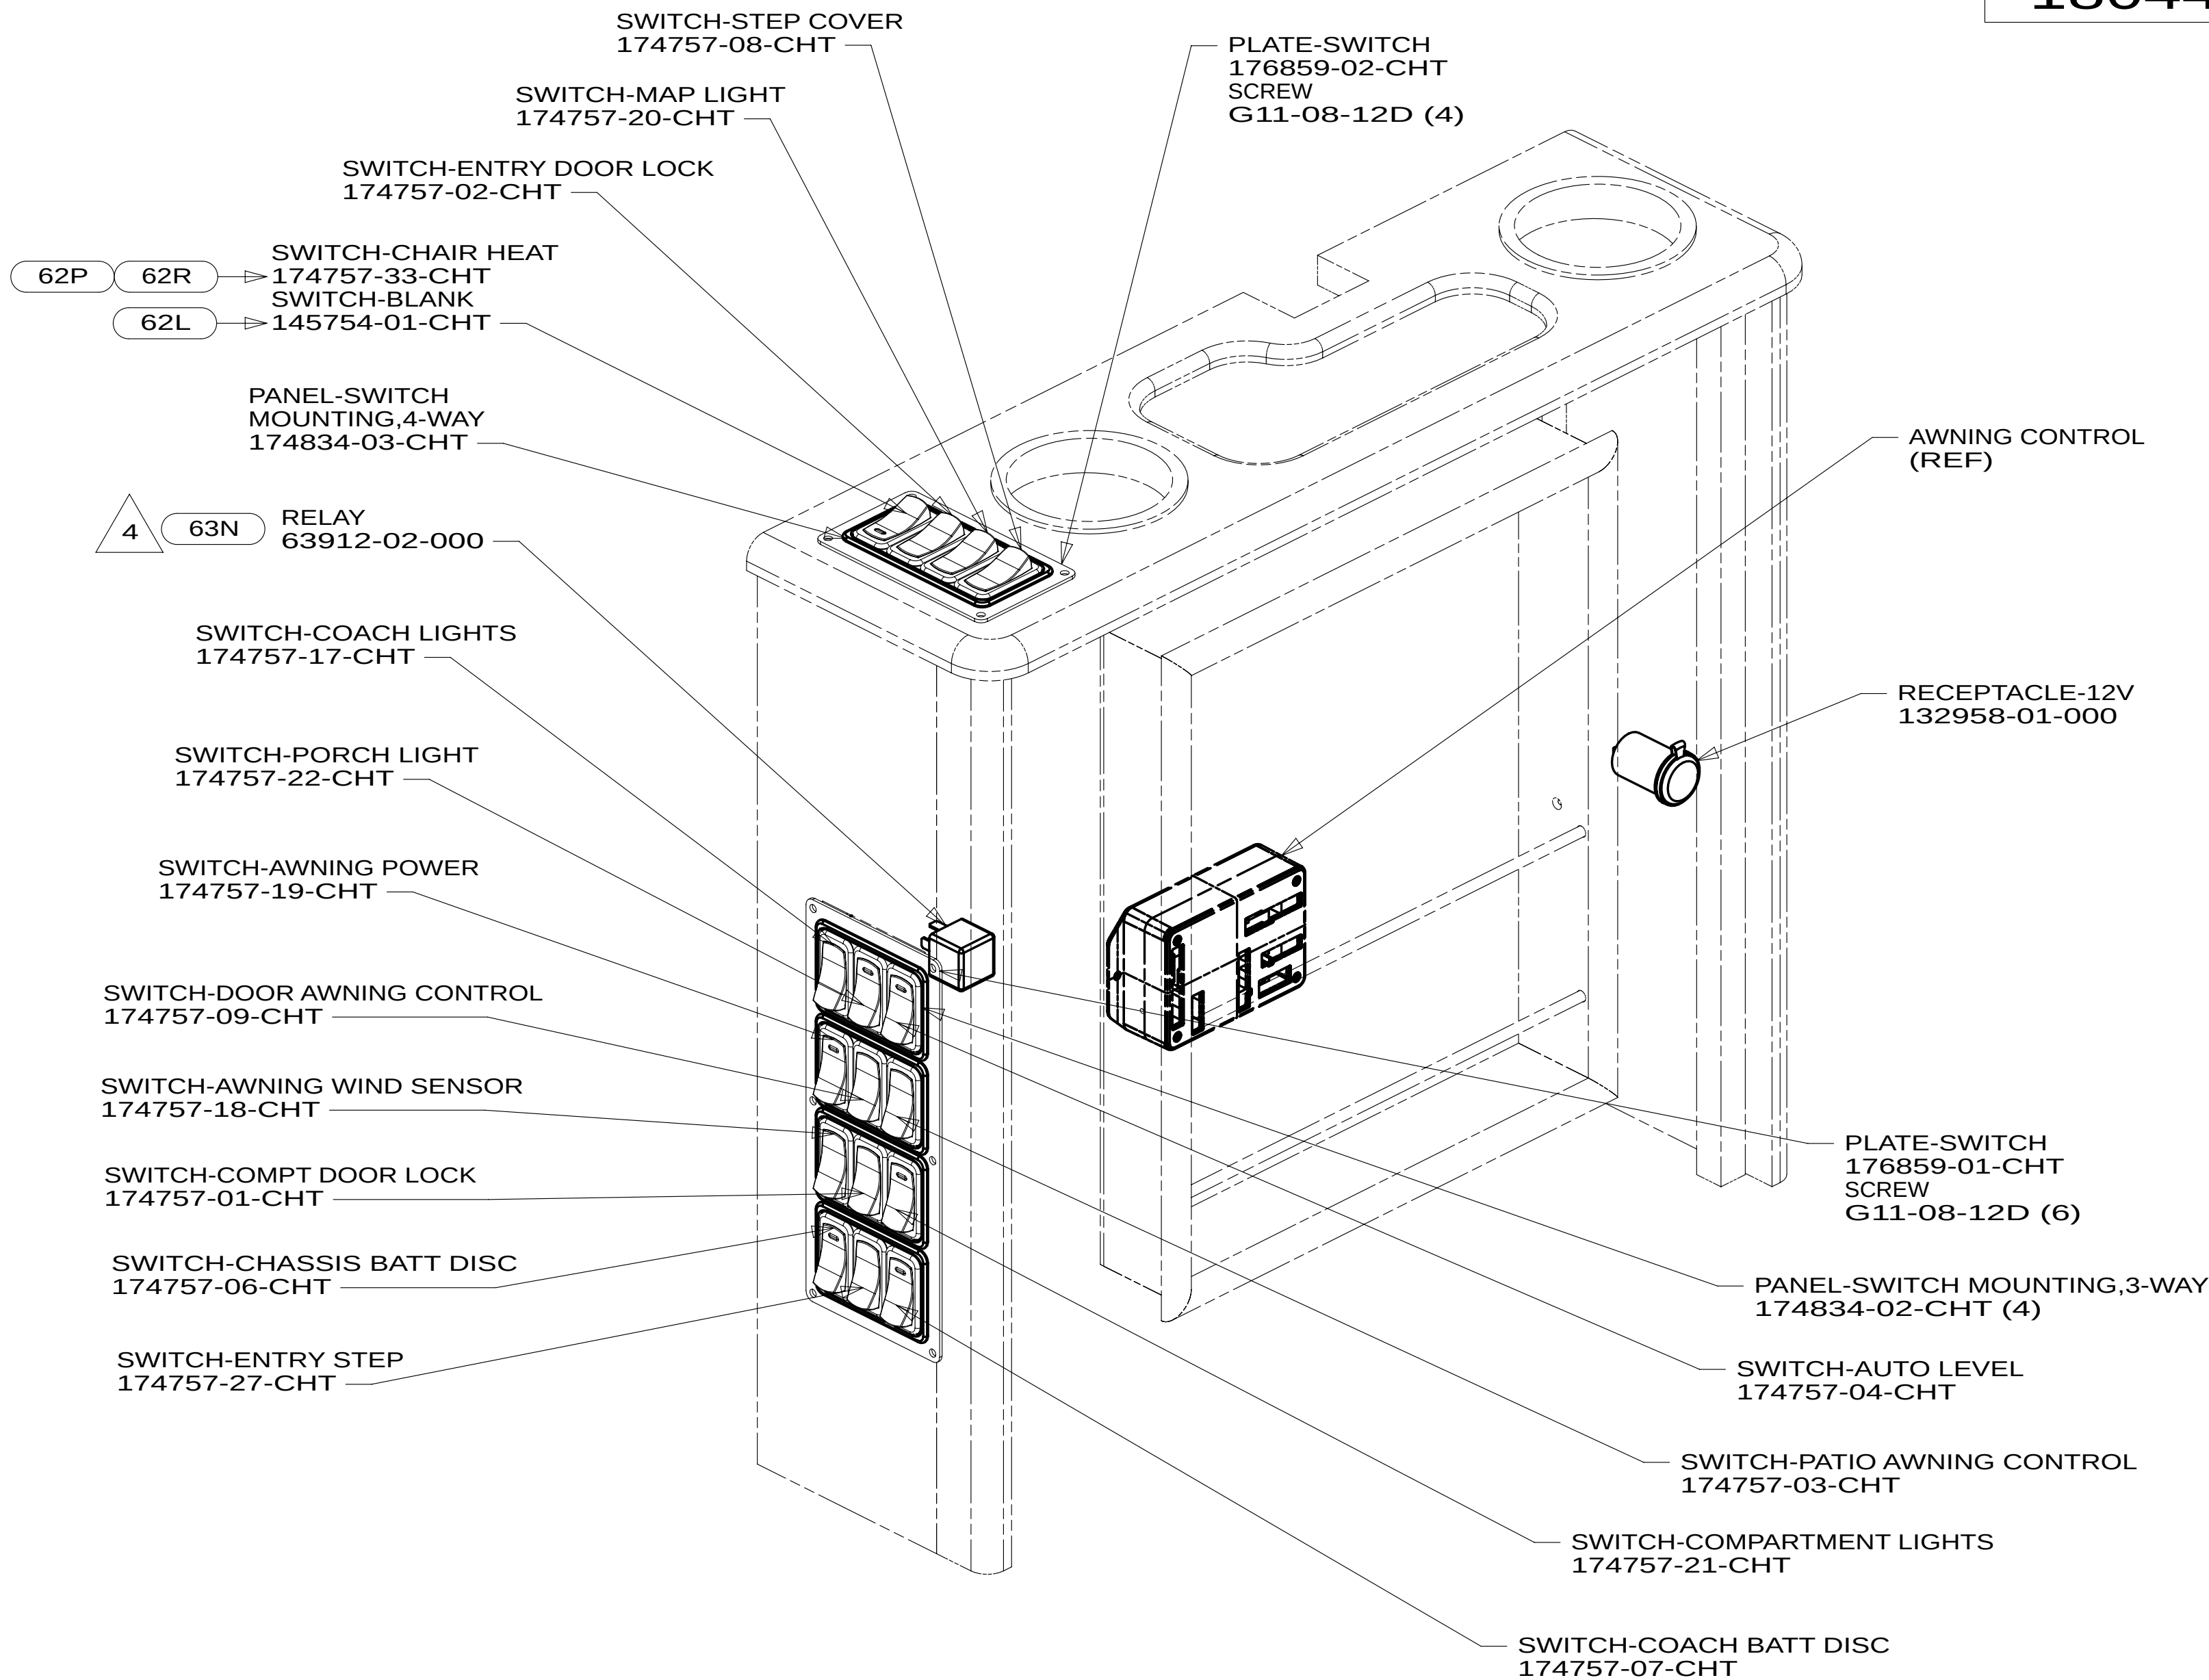

62P 62R SWITCH-CHAIR HEAT
174757-33-CHT
SWITCH-BLANK
62L 145754-01-CHT

PANEL-SWITCH
MOUNTING, 4-WAY
174834-03-CHT

4 63N RELAY
63912-02-000

SWITCH-COACH LIGHTS
174757-17-CHT

SWITCH-PORCH LIGHT
174757-22-CHT

SWITCH-AWNING POWER
174757-19-CHT

SWITCH-DOOR AWNING CONTROL
174757-09-CHT

SWITCH-AWNING WIND SENSOR
174757-18-CHT

SWITCH-COMPT DOOR LOCK
174757-01-CHT

SWITCH-CHASSIS BATT DISC
174757-06-CHT

SWITCH-ENTRY STEP
174757-27-CHT

SWITCH-STEP COVER
174757-08-CHT

SWITCH-MAP LIGHT
174757-20-CHT

PLATE-SWITCH
176859-02-CHT
SCREW
G11-08-12D (4)

AWNING CONTROL
(REF)

RECEPTACLE-12V
132958-01-000

PLATE-SWITCH
176859-01-CHT
SCREW
G11-08-12D (6)




PANEL-SWITCH MOUNTING, 3-WAY
174834-02-CHT (4)

SWITCH-AUTO LEVEL
174757-04-CHT

SWITCH-PATIO AWNING CONTROL
174757-03-CHT

SWITCH-COMPARTMENT LIGHTS
174757-21-CHT

SWITCH-COACH BATT DISC
174757-07-CHT

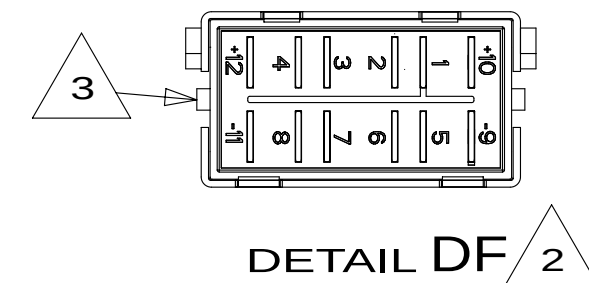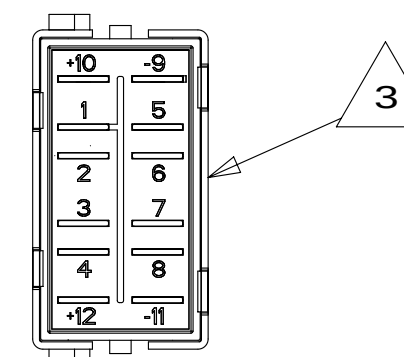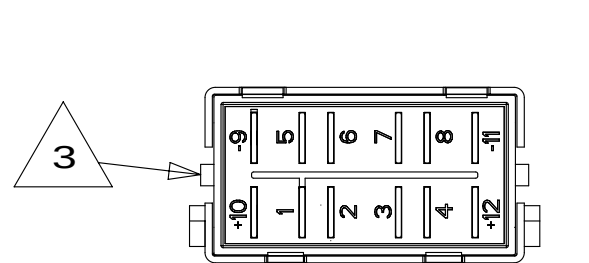

- 62R SEATS-W/QUEEN PASS.- HEATED
- 62P SEATS-DR/PASS UL/HEAT/TABLET
- 62L SEATS-LUXURY CAB
- 63N AWNING-ENTRY, ELECTRIC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED

13 R42QD

DO NOT SCALE DRAWING

TITLE:

WIRING INSTL-BODY, 12V

SHEET 4


PART NO

180442

REV

15-Apr-2013

*180442 *

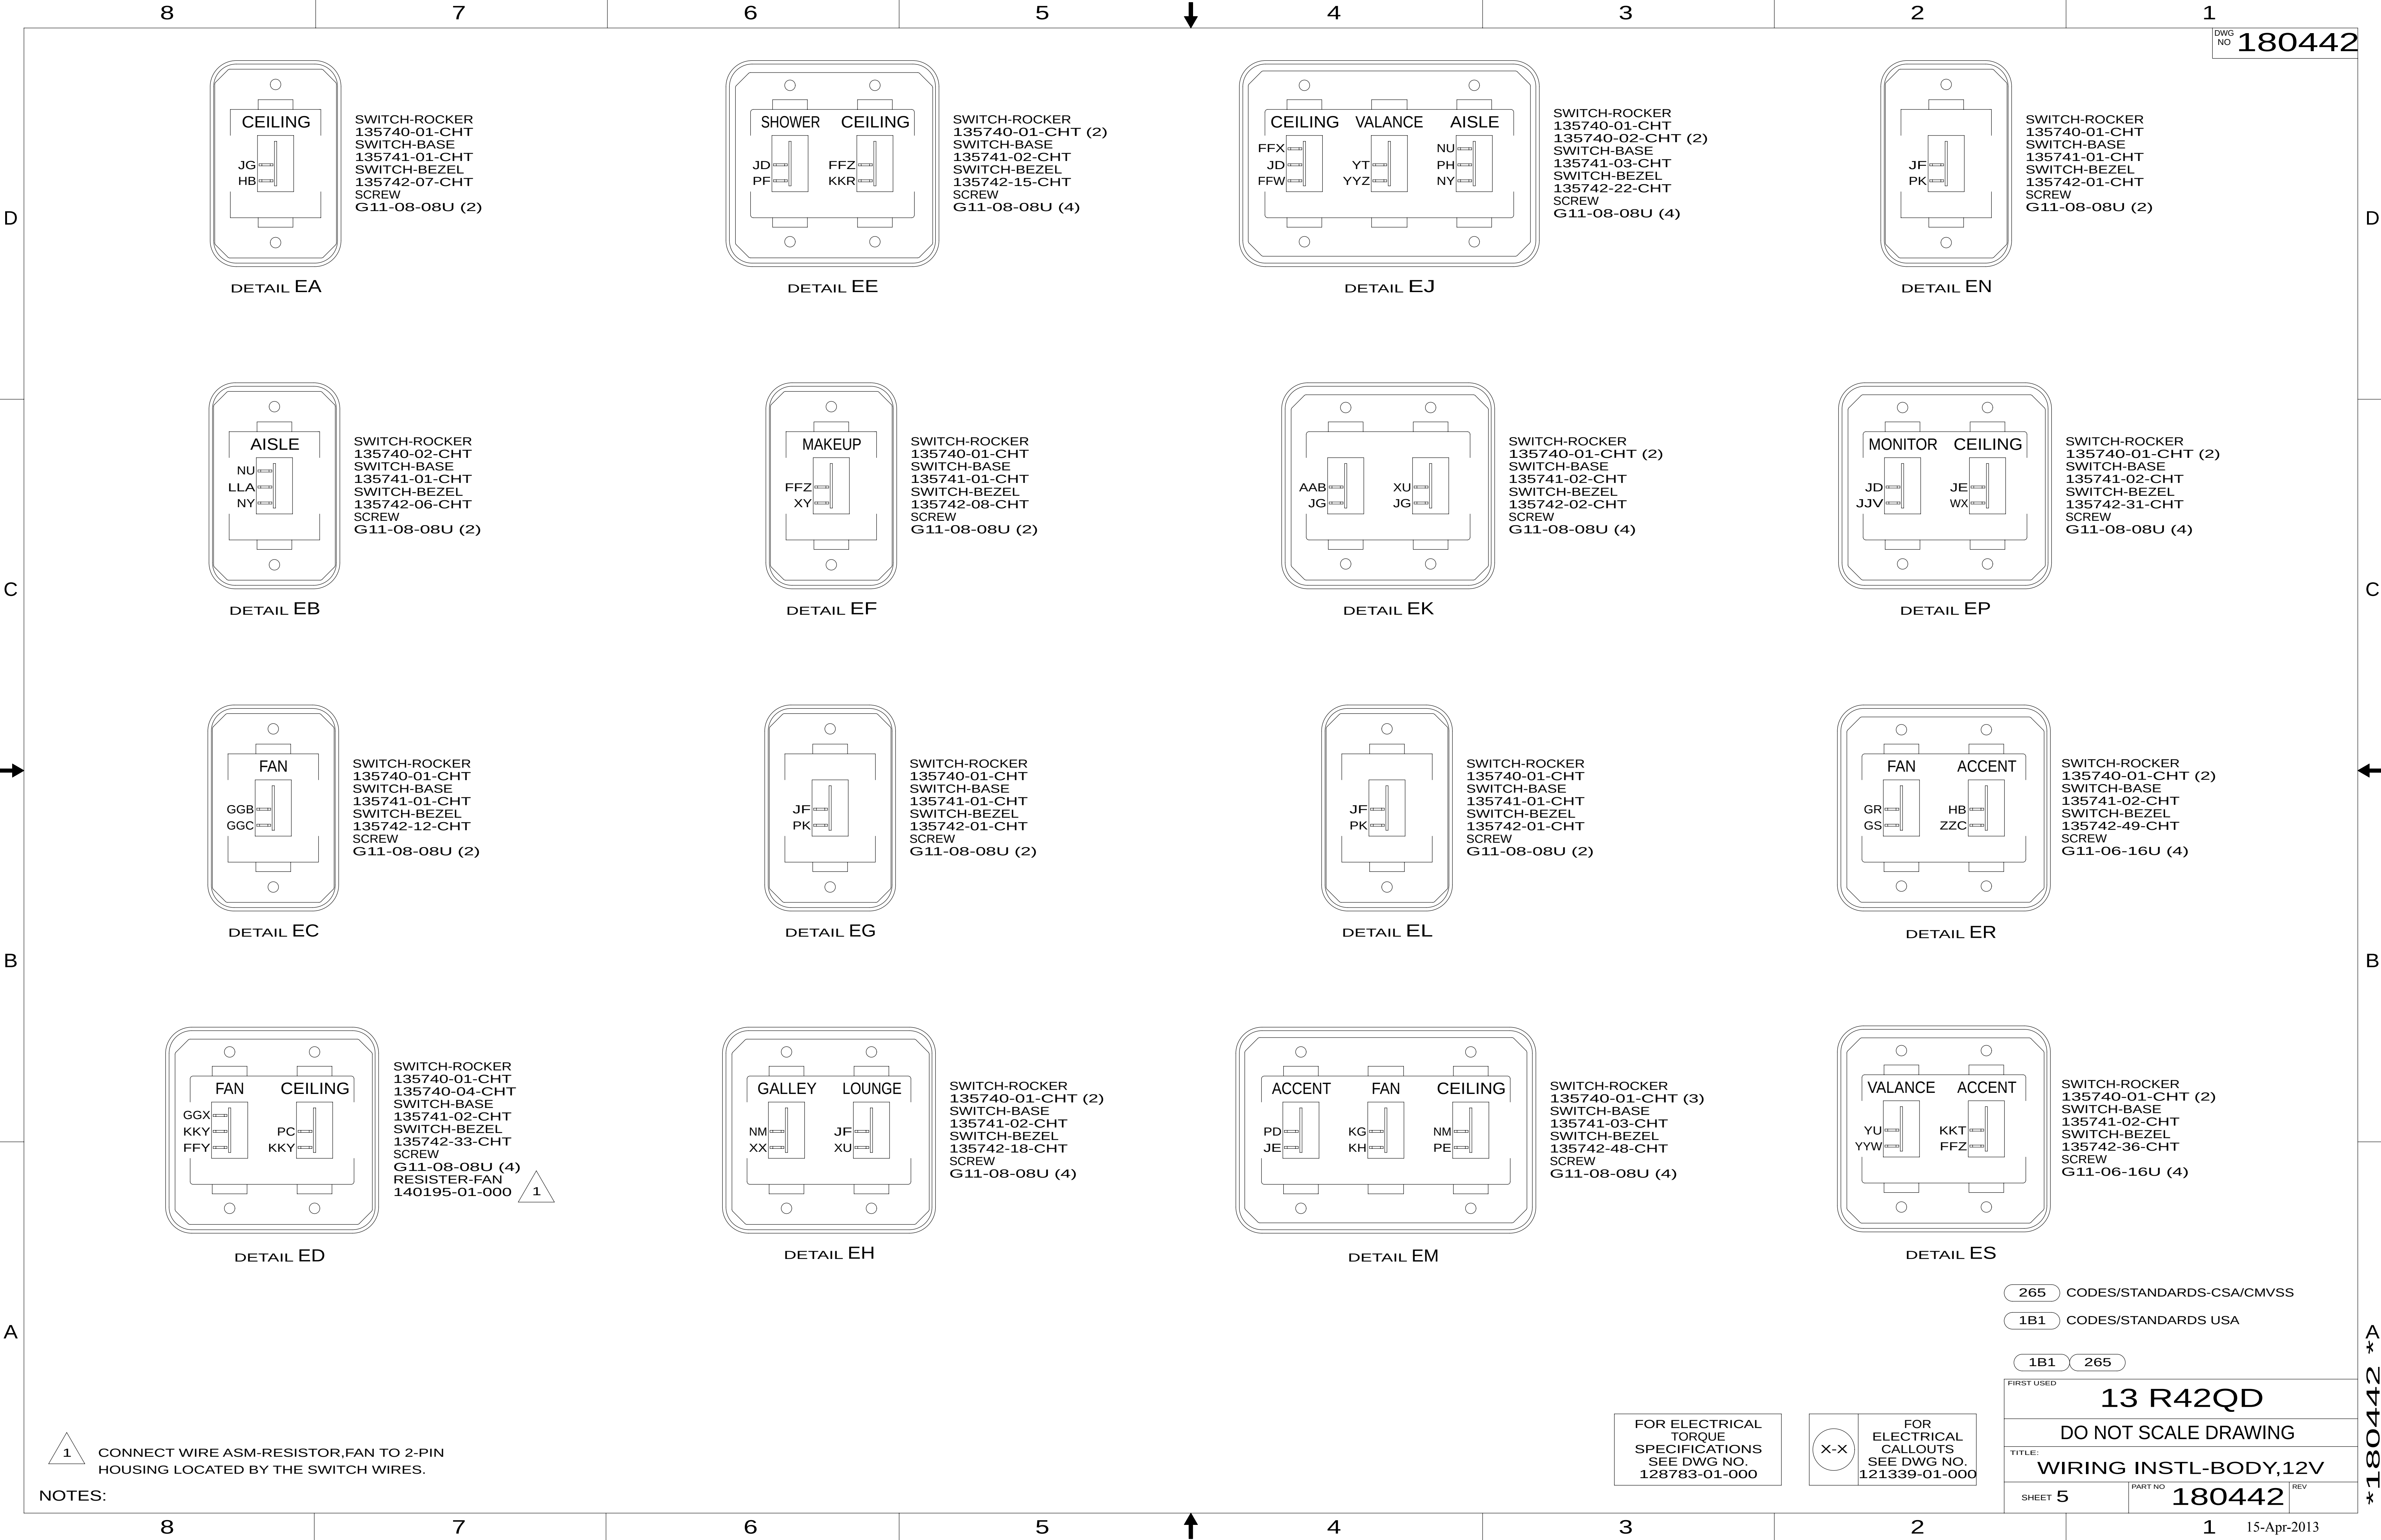

1 CONNECT WIRE ASM-RESISTOR,FAN TO 2-PIN HOUSING LOCATED BY THE SWITCH WIRES.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
13 R42QD		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 5	PART NO 180442	REV

180442

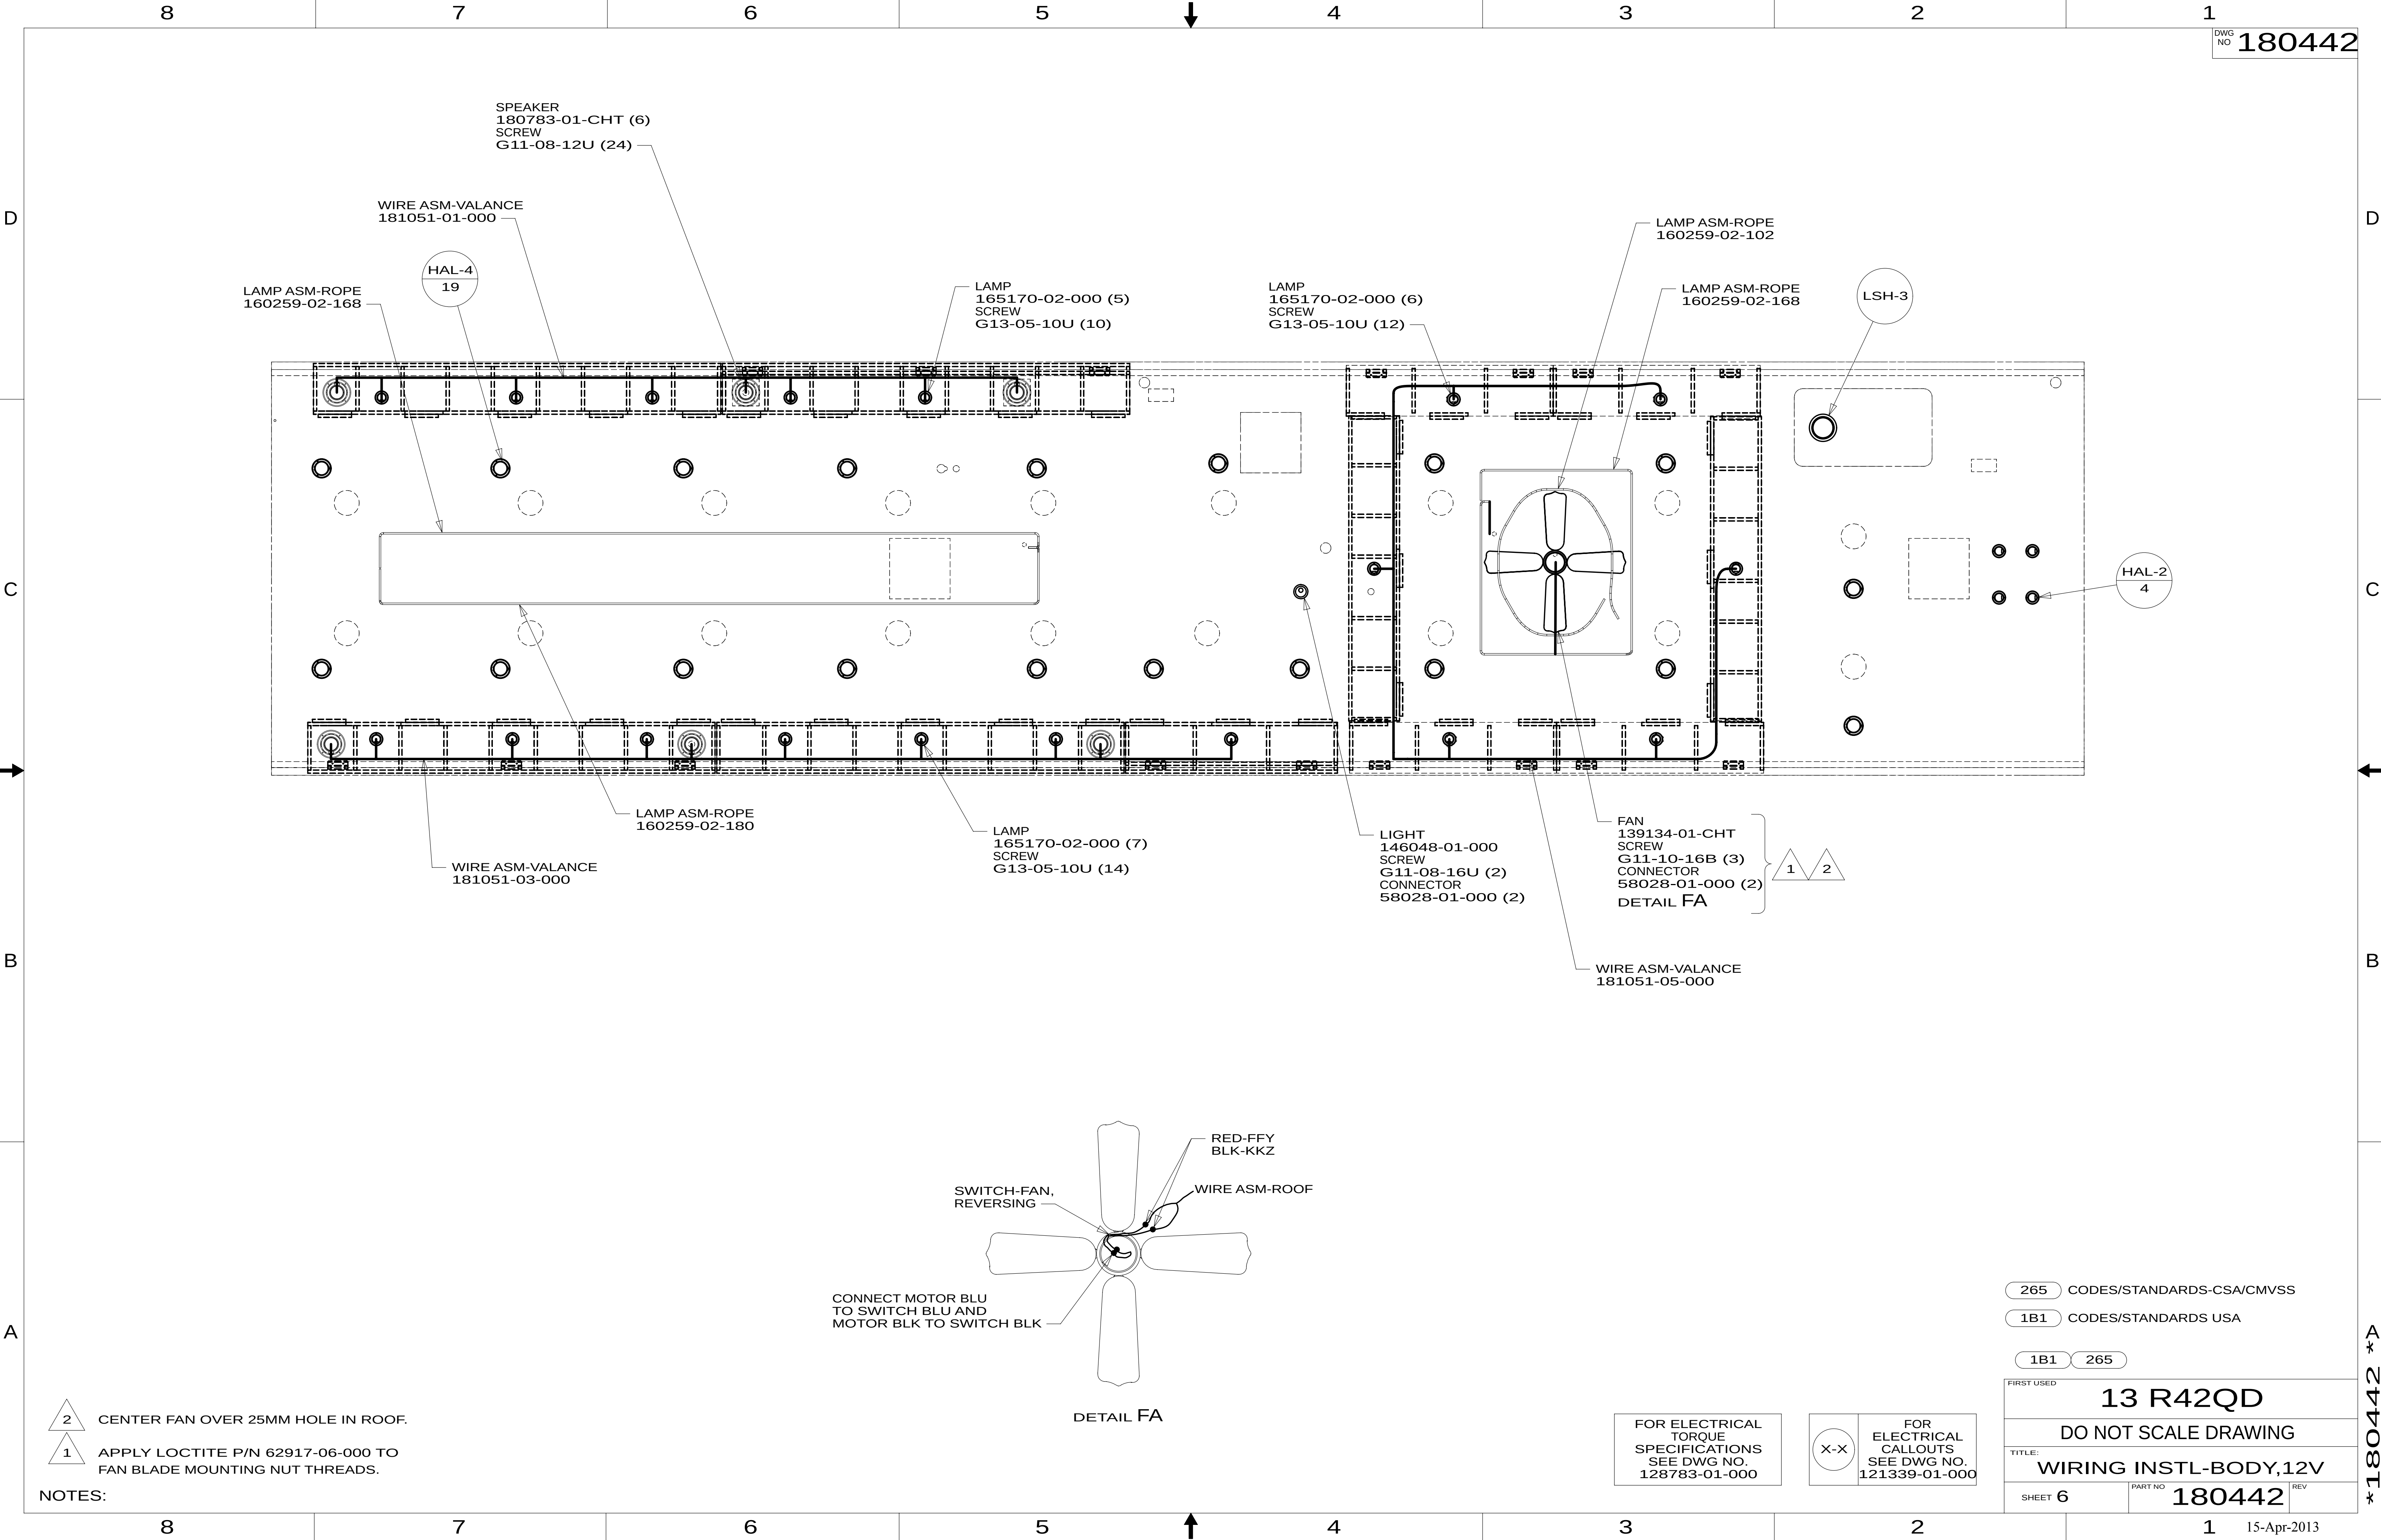


- 2

CENTER FAN OVER 25MM HOLE IN ROOF.
- 1

APPLY LOCTITE P/N 62917-06-000 TO FAN BLADE MOUNTING NUT THREADS.

NOTES:

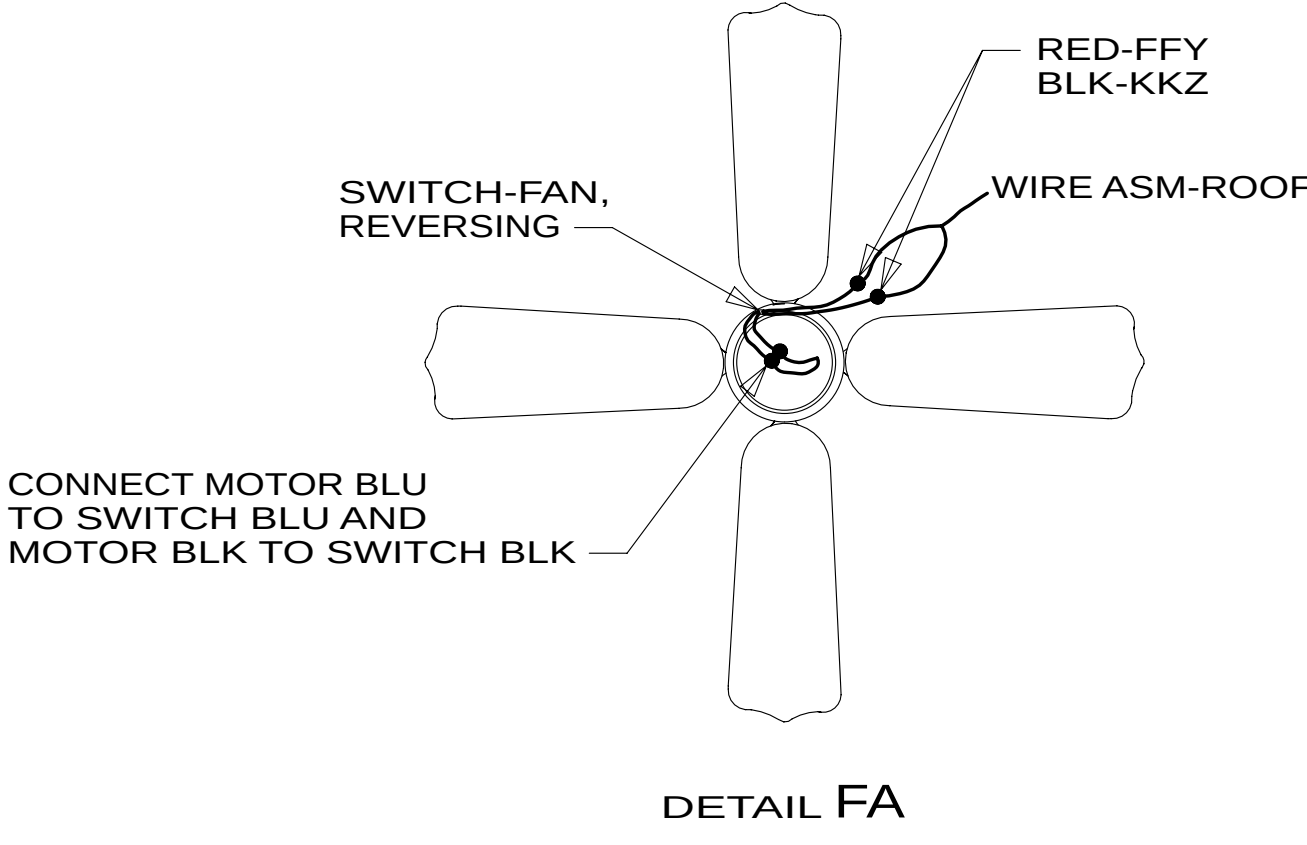

DETAIL FA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265

CODES/STANDARDS-CSA/CMVSS
- 1B1





CODES/STANDARDS USA

- 1B1

265

FIRST USED			13 R42QD	
			DO NOT SCALE DRAWING	
TITLE:			WIRING INSTL-BODY,12V	
SHEET 6	PART NO	180442	REV	
			1	15-Apr-2013

*180442 *A

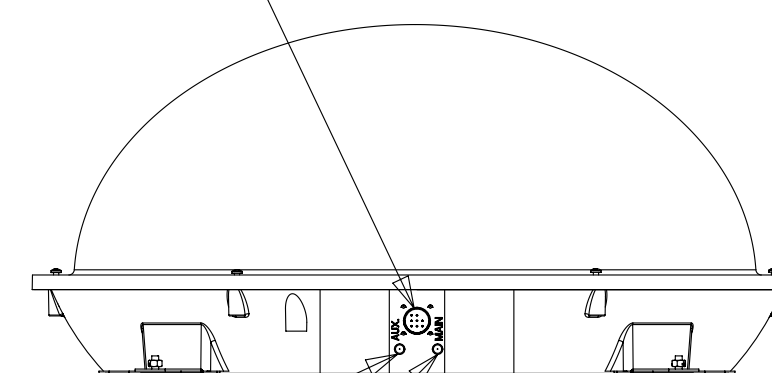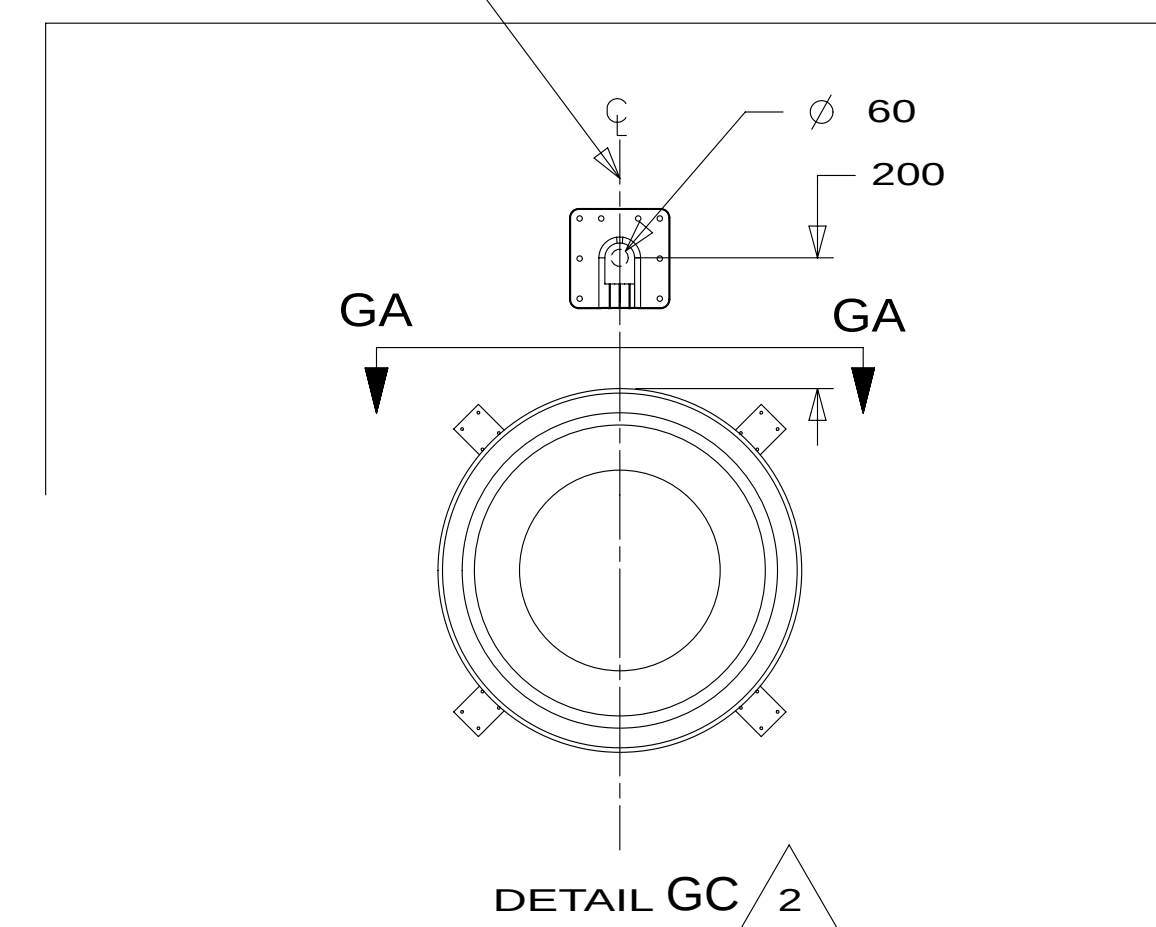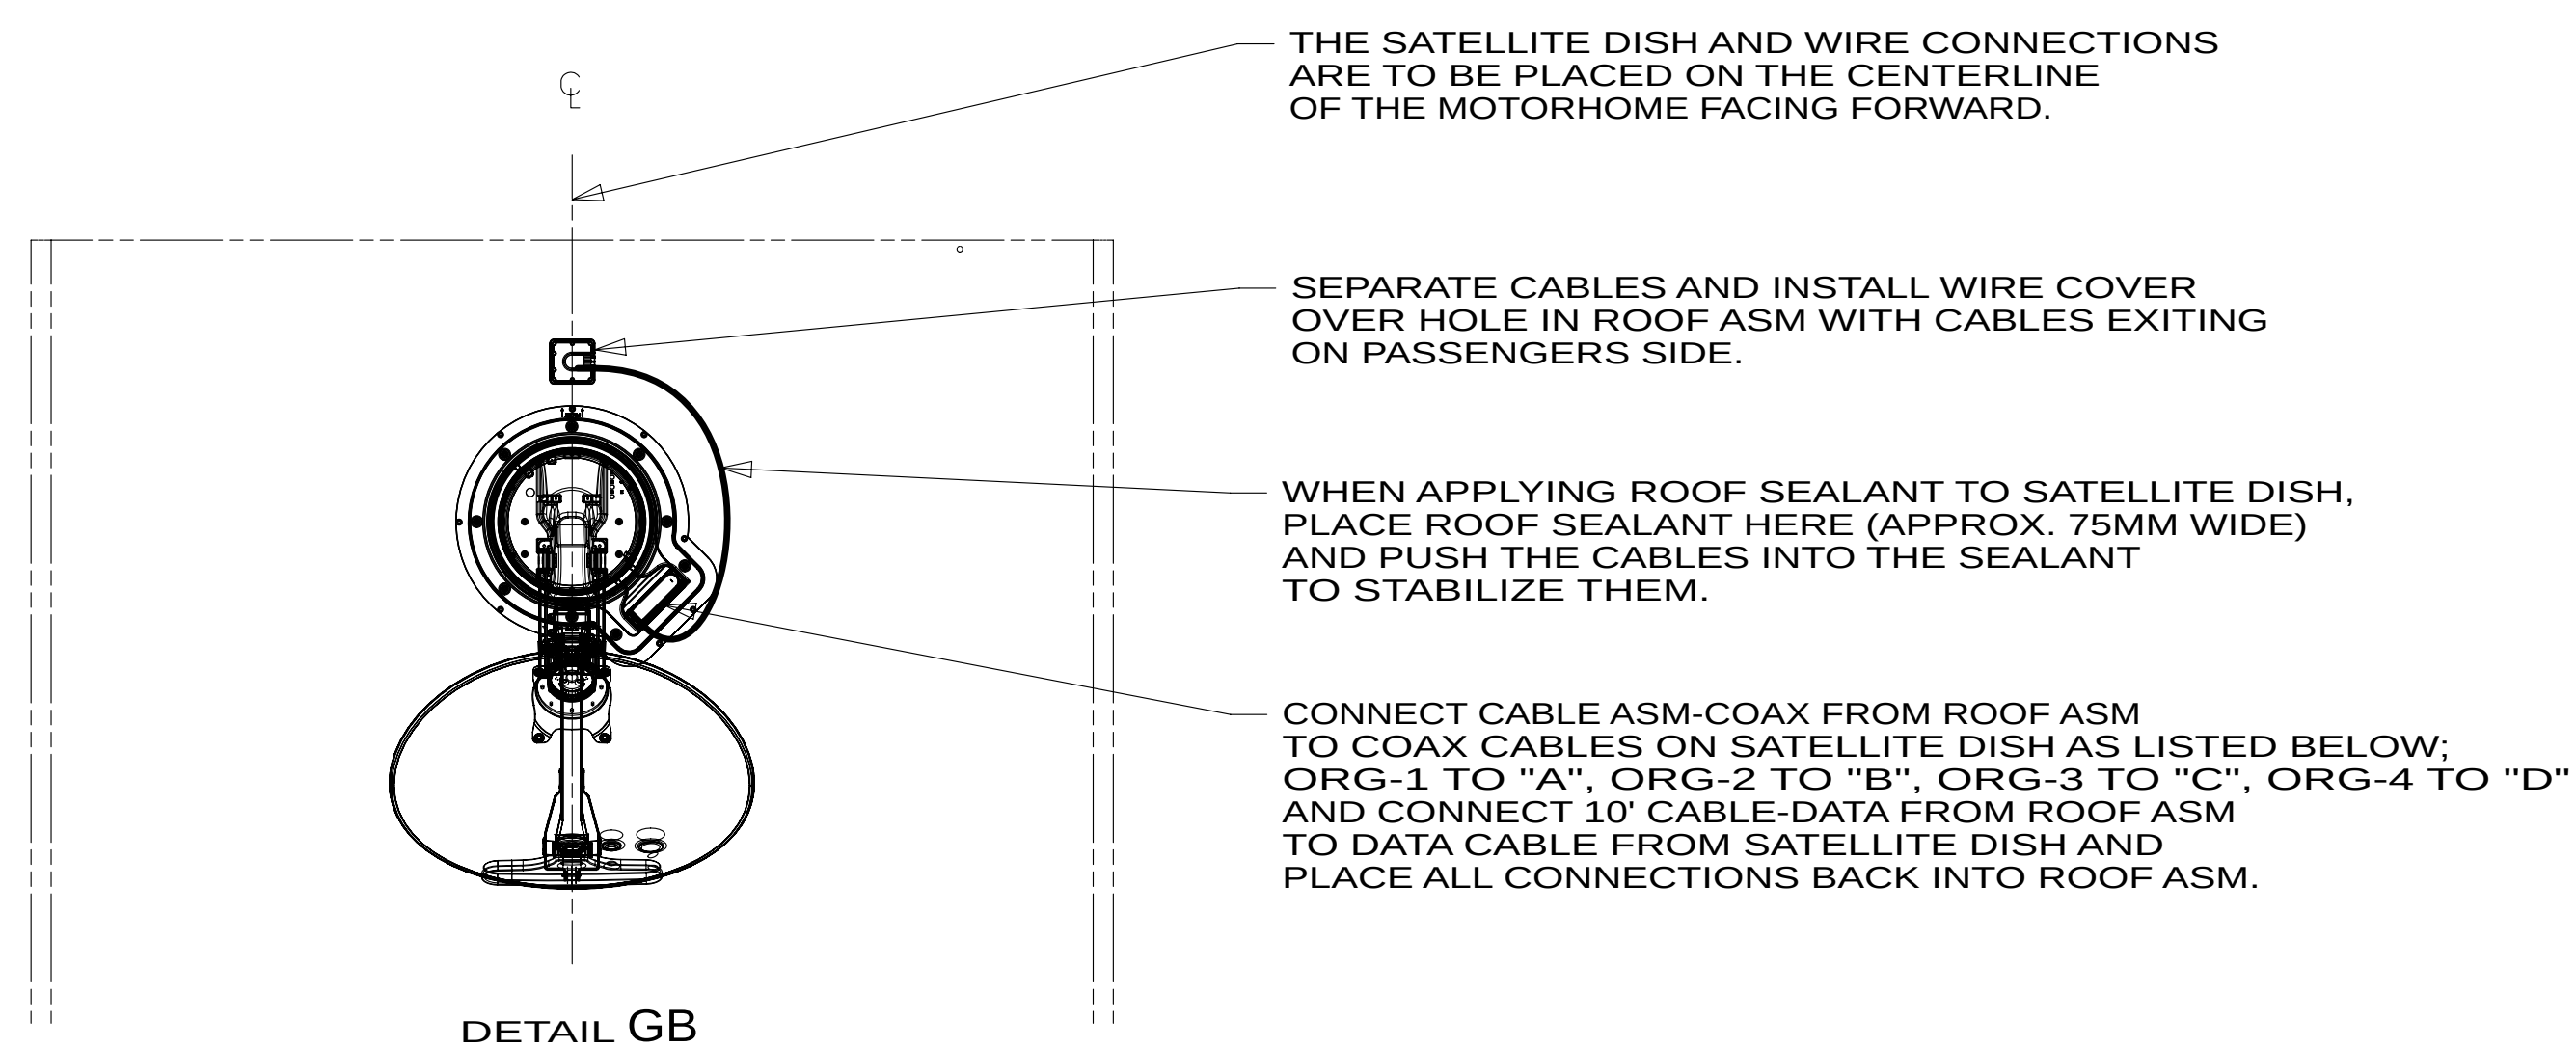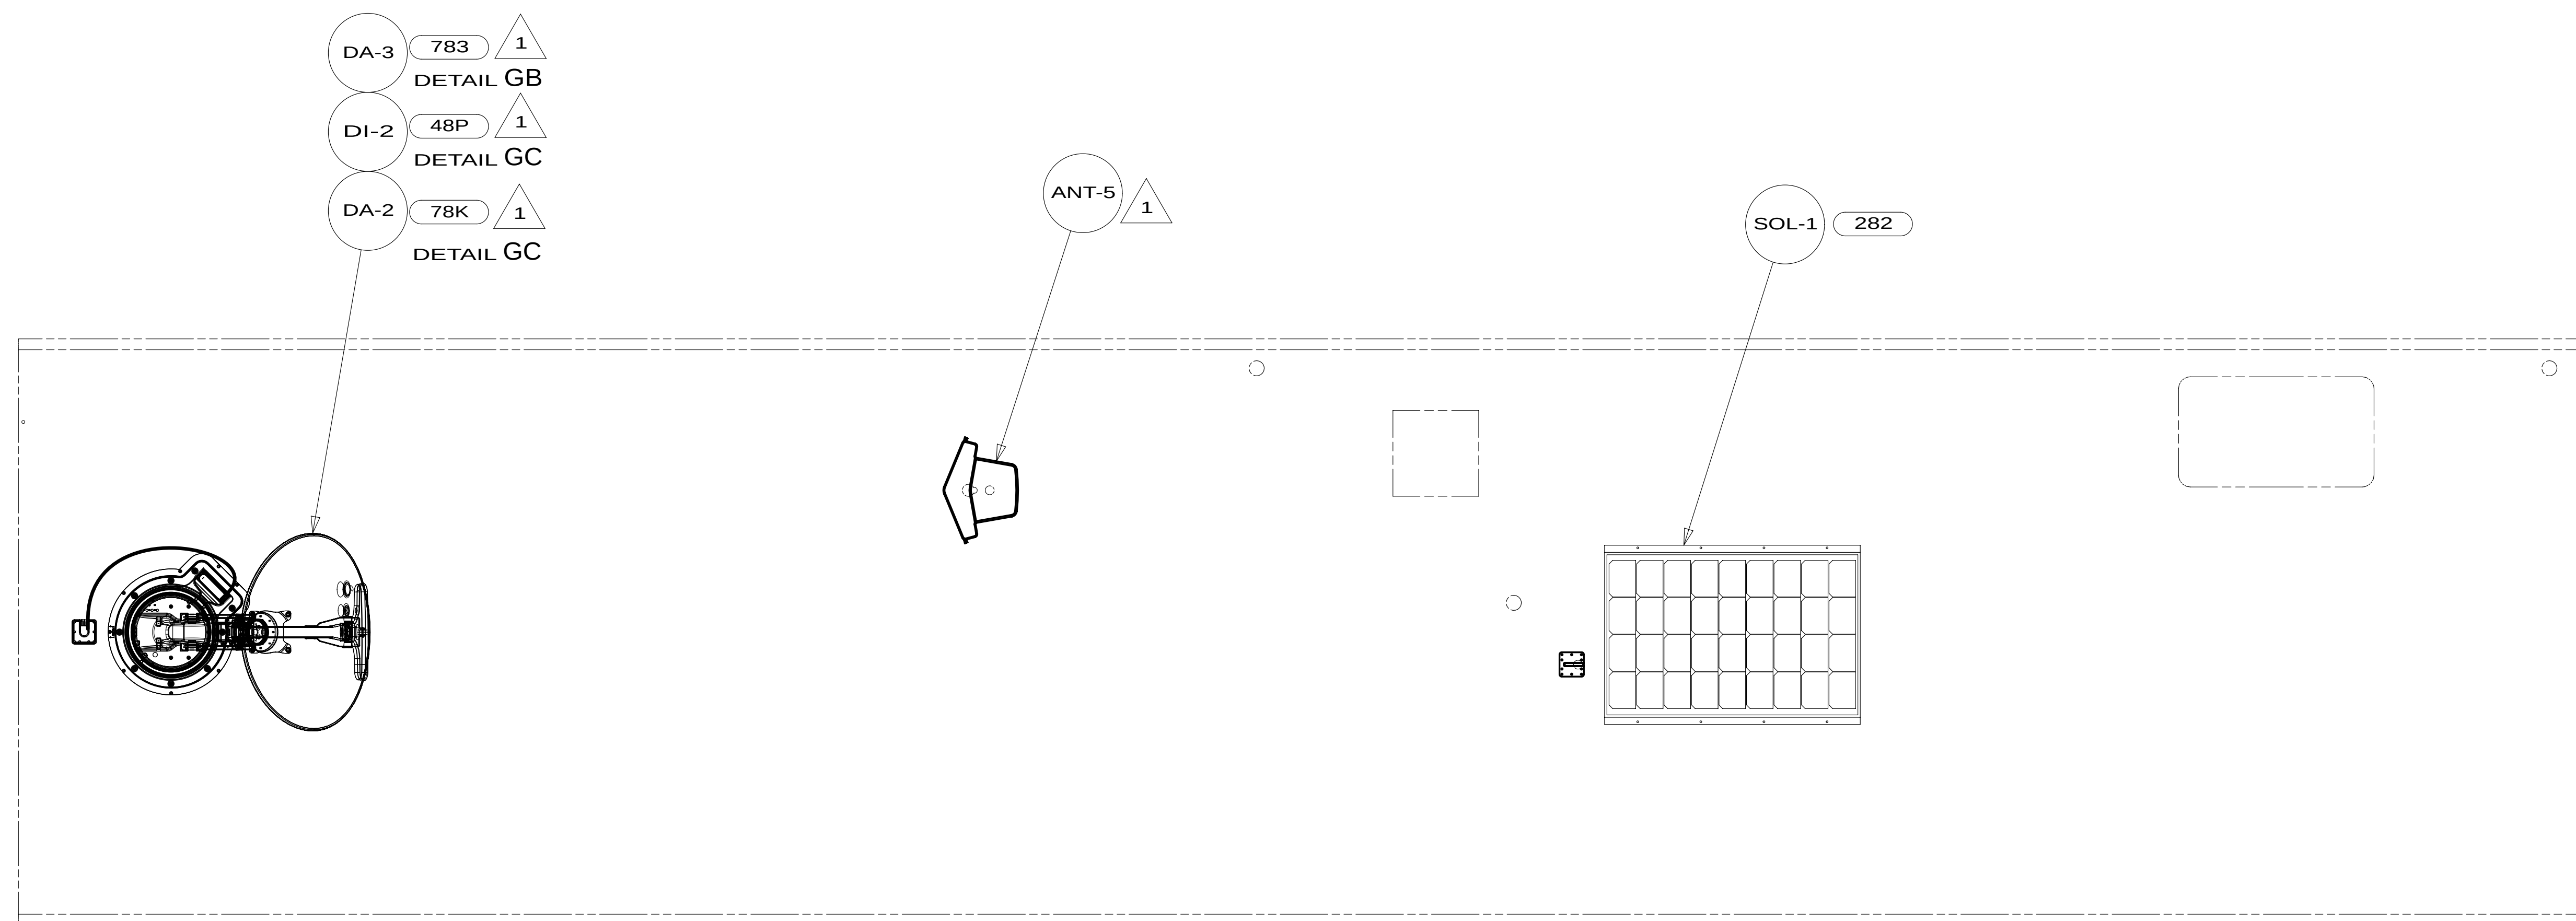

CONNECT CABLE ASM-COAX
(ORG-2) FROM ROOF ASM
TO AUX INPUT ON SATELLITE DISH

CONNECT CABLE ASM-COAX
(ORG) FROM ROOF ASM
TO MAIN INPUT ON SATELLITE DISH

VIEW GA-GA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	---

- | | |
|-----|------------------------------|
| 783 | SATELLITE HD TV SYSTEM AUTOO |
| 282 | SOLAR PANEL - 100 WATT |
| 78K | SATELLITE DISH-AUTOMATIC |
| 1D3 | ENTERTAIN CENTR/EXT TV-DVD |
| 48P | SAT TV SYSTEM IN-MOTION |
| 25D | STEREO SYSTEM/W/CD/DVD REAR |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |

1B1 265

13 R42QD

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-BODY,12V

SHEET 7	PART NO	180442	REV
---------	---------	--------	-----


15-Apr-2013

					*A
					*
					180442

2 REMOVE ALL SHIPPING RESTRAINTS AND FIRMLY INSERT THE SUPPLIED PLUGS INTO THE APPROPRIATE SIZED HOLES AS SPECIFIED IN THE INSTALLATION PROCESS.

 SEE MANUFACTURER'S INSTALLATION FOR ADDITIONAL INFORMATION.

NOTES:

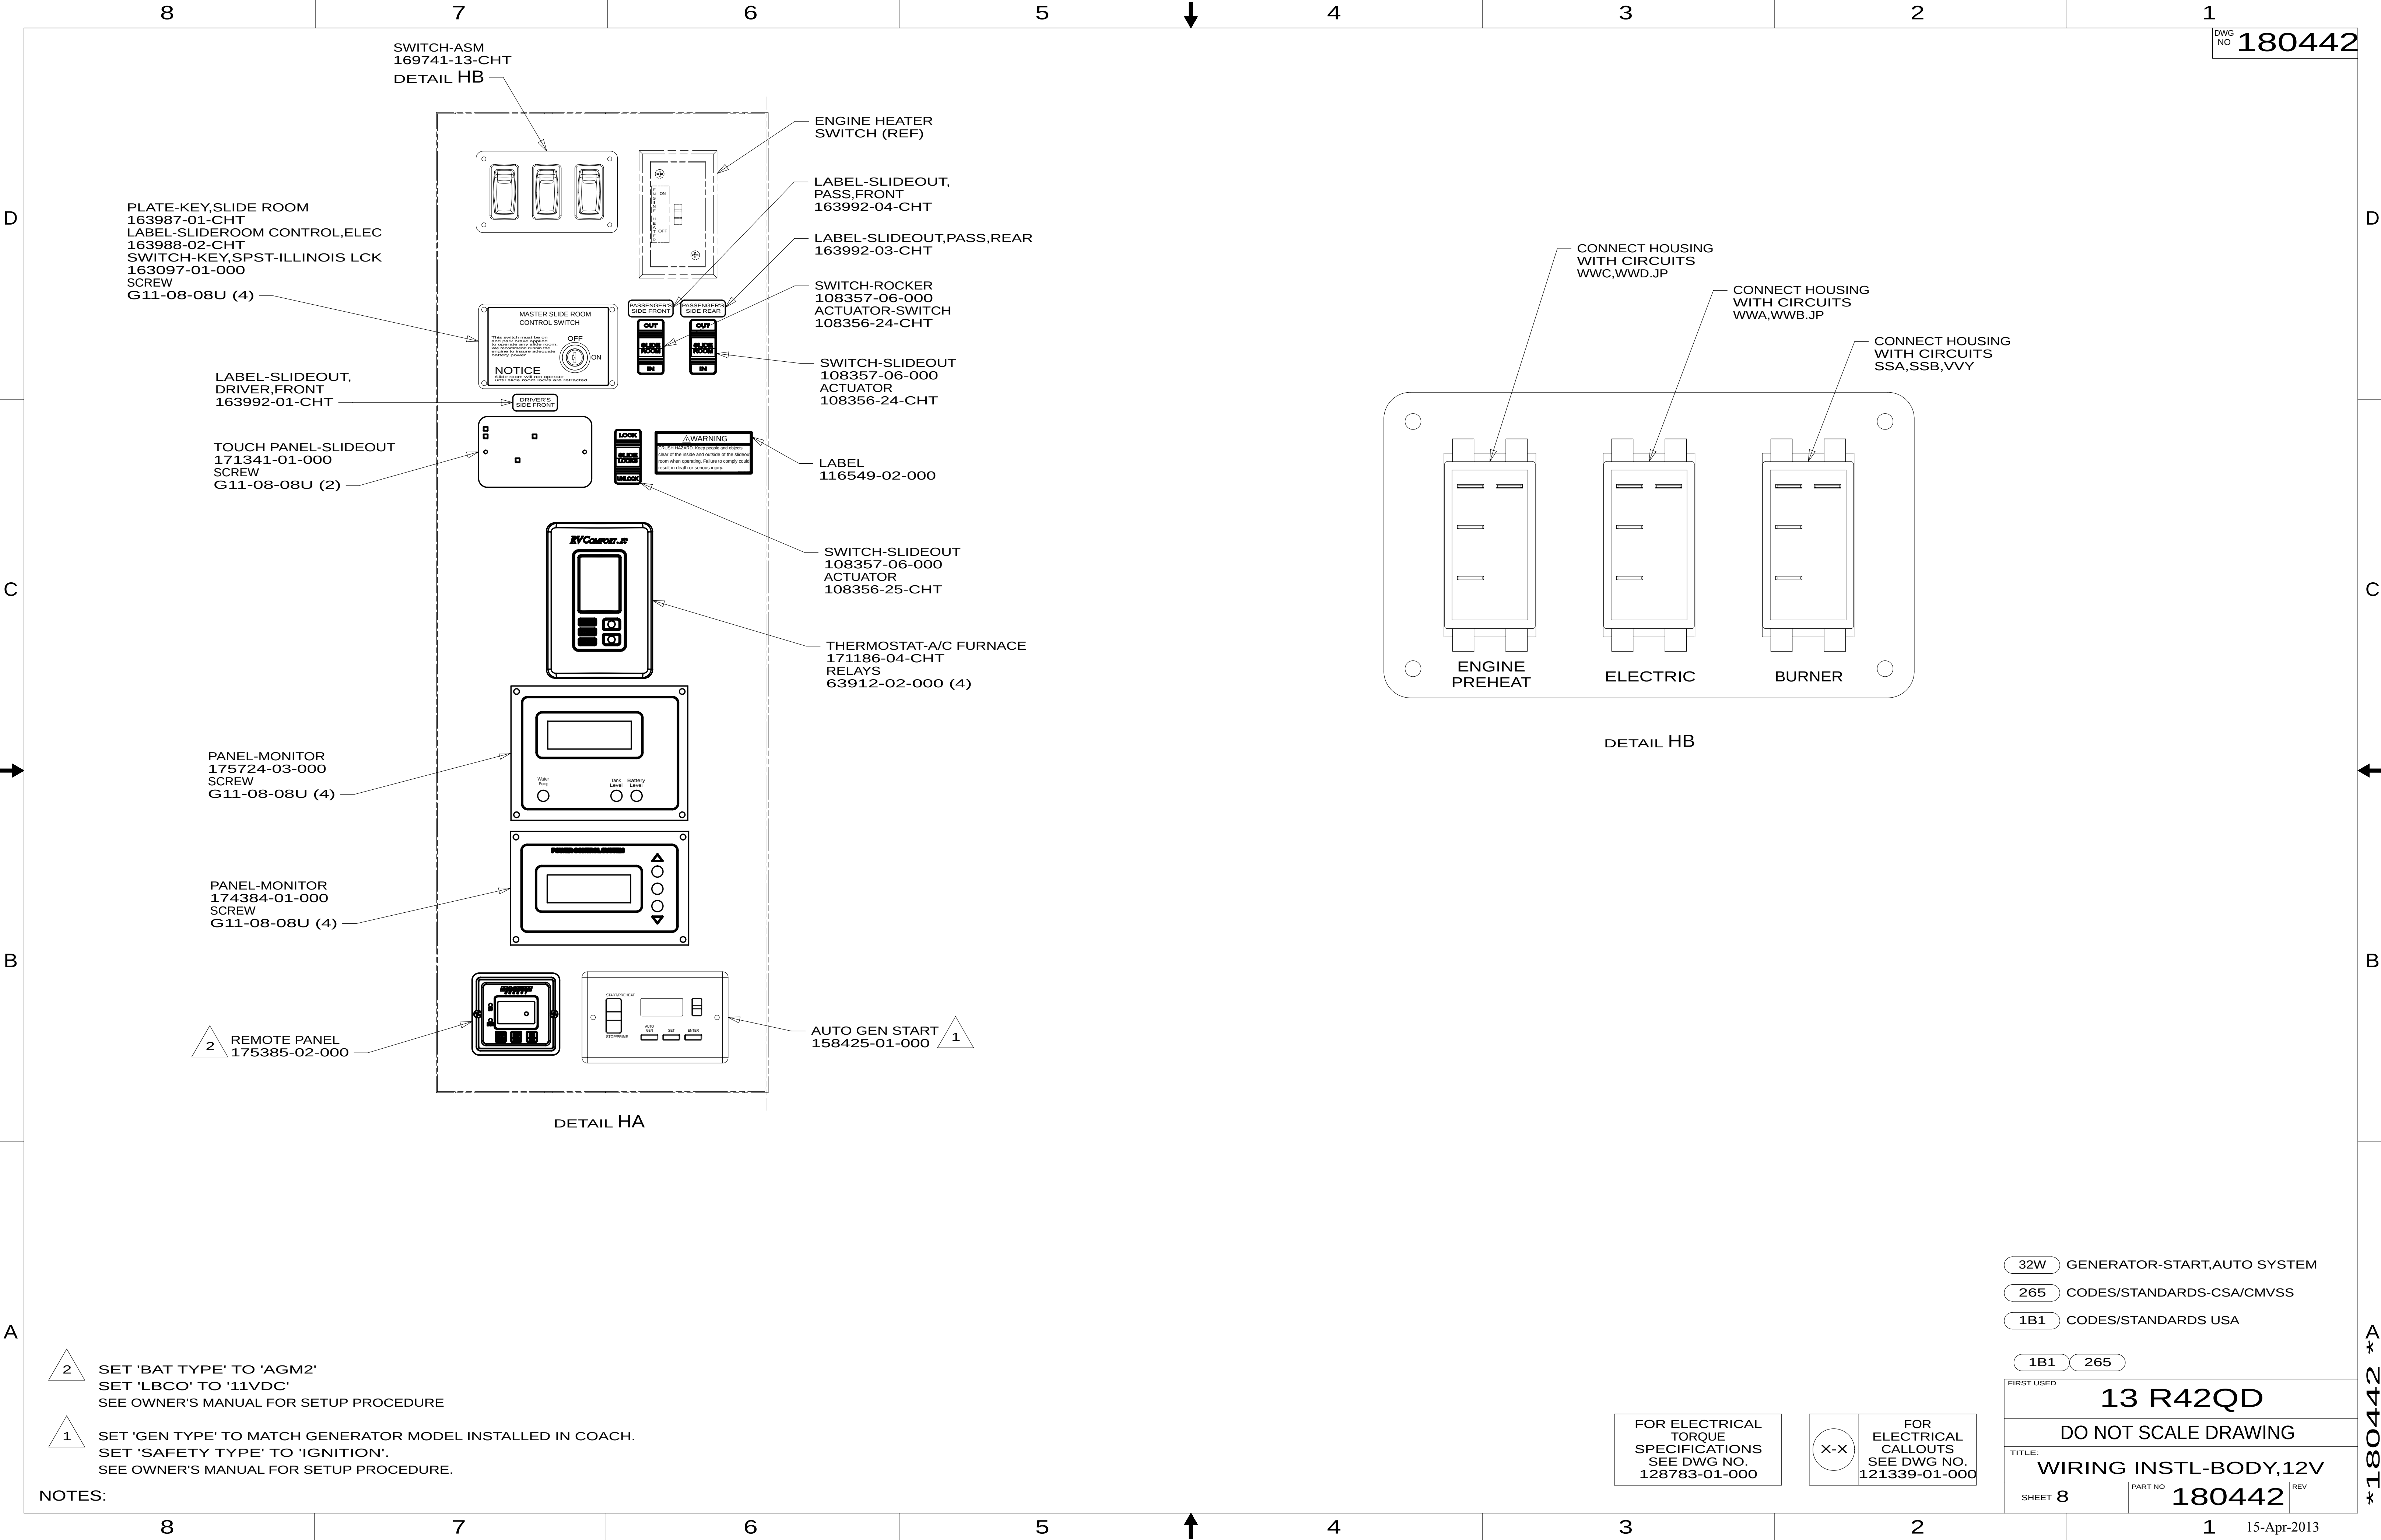

2 SET 'BAT TYPE' TO 'AGM2'
SET 'LBCO' TO '11VDC'
SEE OWNER'S MANUAL FOR SETUP PROCEDURE

1 SET 'GEN TYPE' TO MATCH GENERATOR MODEL INSTALLED IN COACH.
SET 'SAFETY TYPE' TO 'IGNITION'.
SEE OWNER'S MANUAL FOR SETUP PROCEDURE.

NOTES:

32W

GENERATOR-START,AUTO SYSTEM

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

FIRST USED

13 R42QD

DO NOT SCALE DRAWING

TITLE:

WIRING INSTL-BODY,12V

SHEET 8

PART NO180442

REV

15-Apr-2013

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

180442

