




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

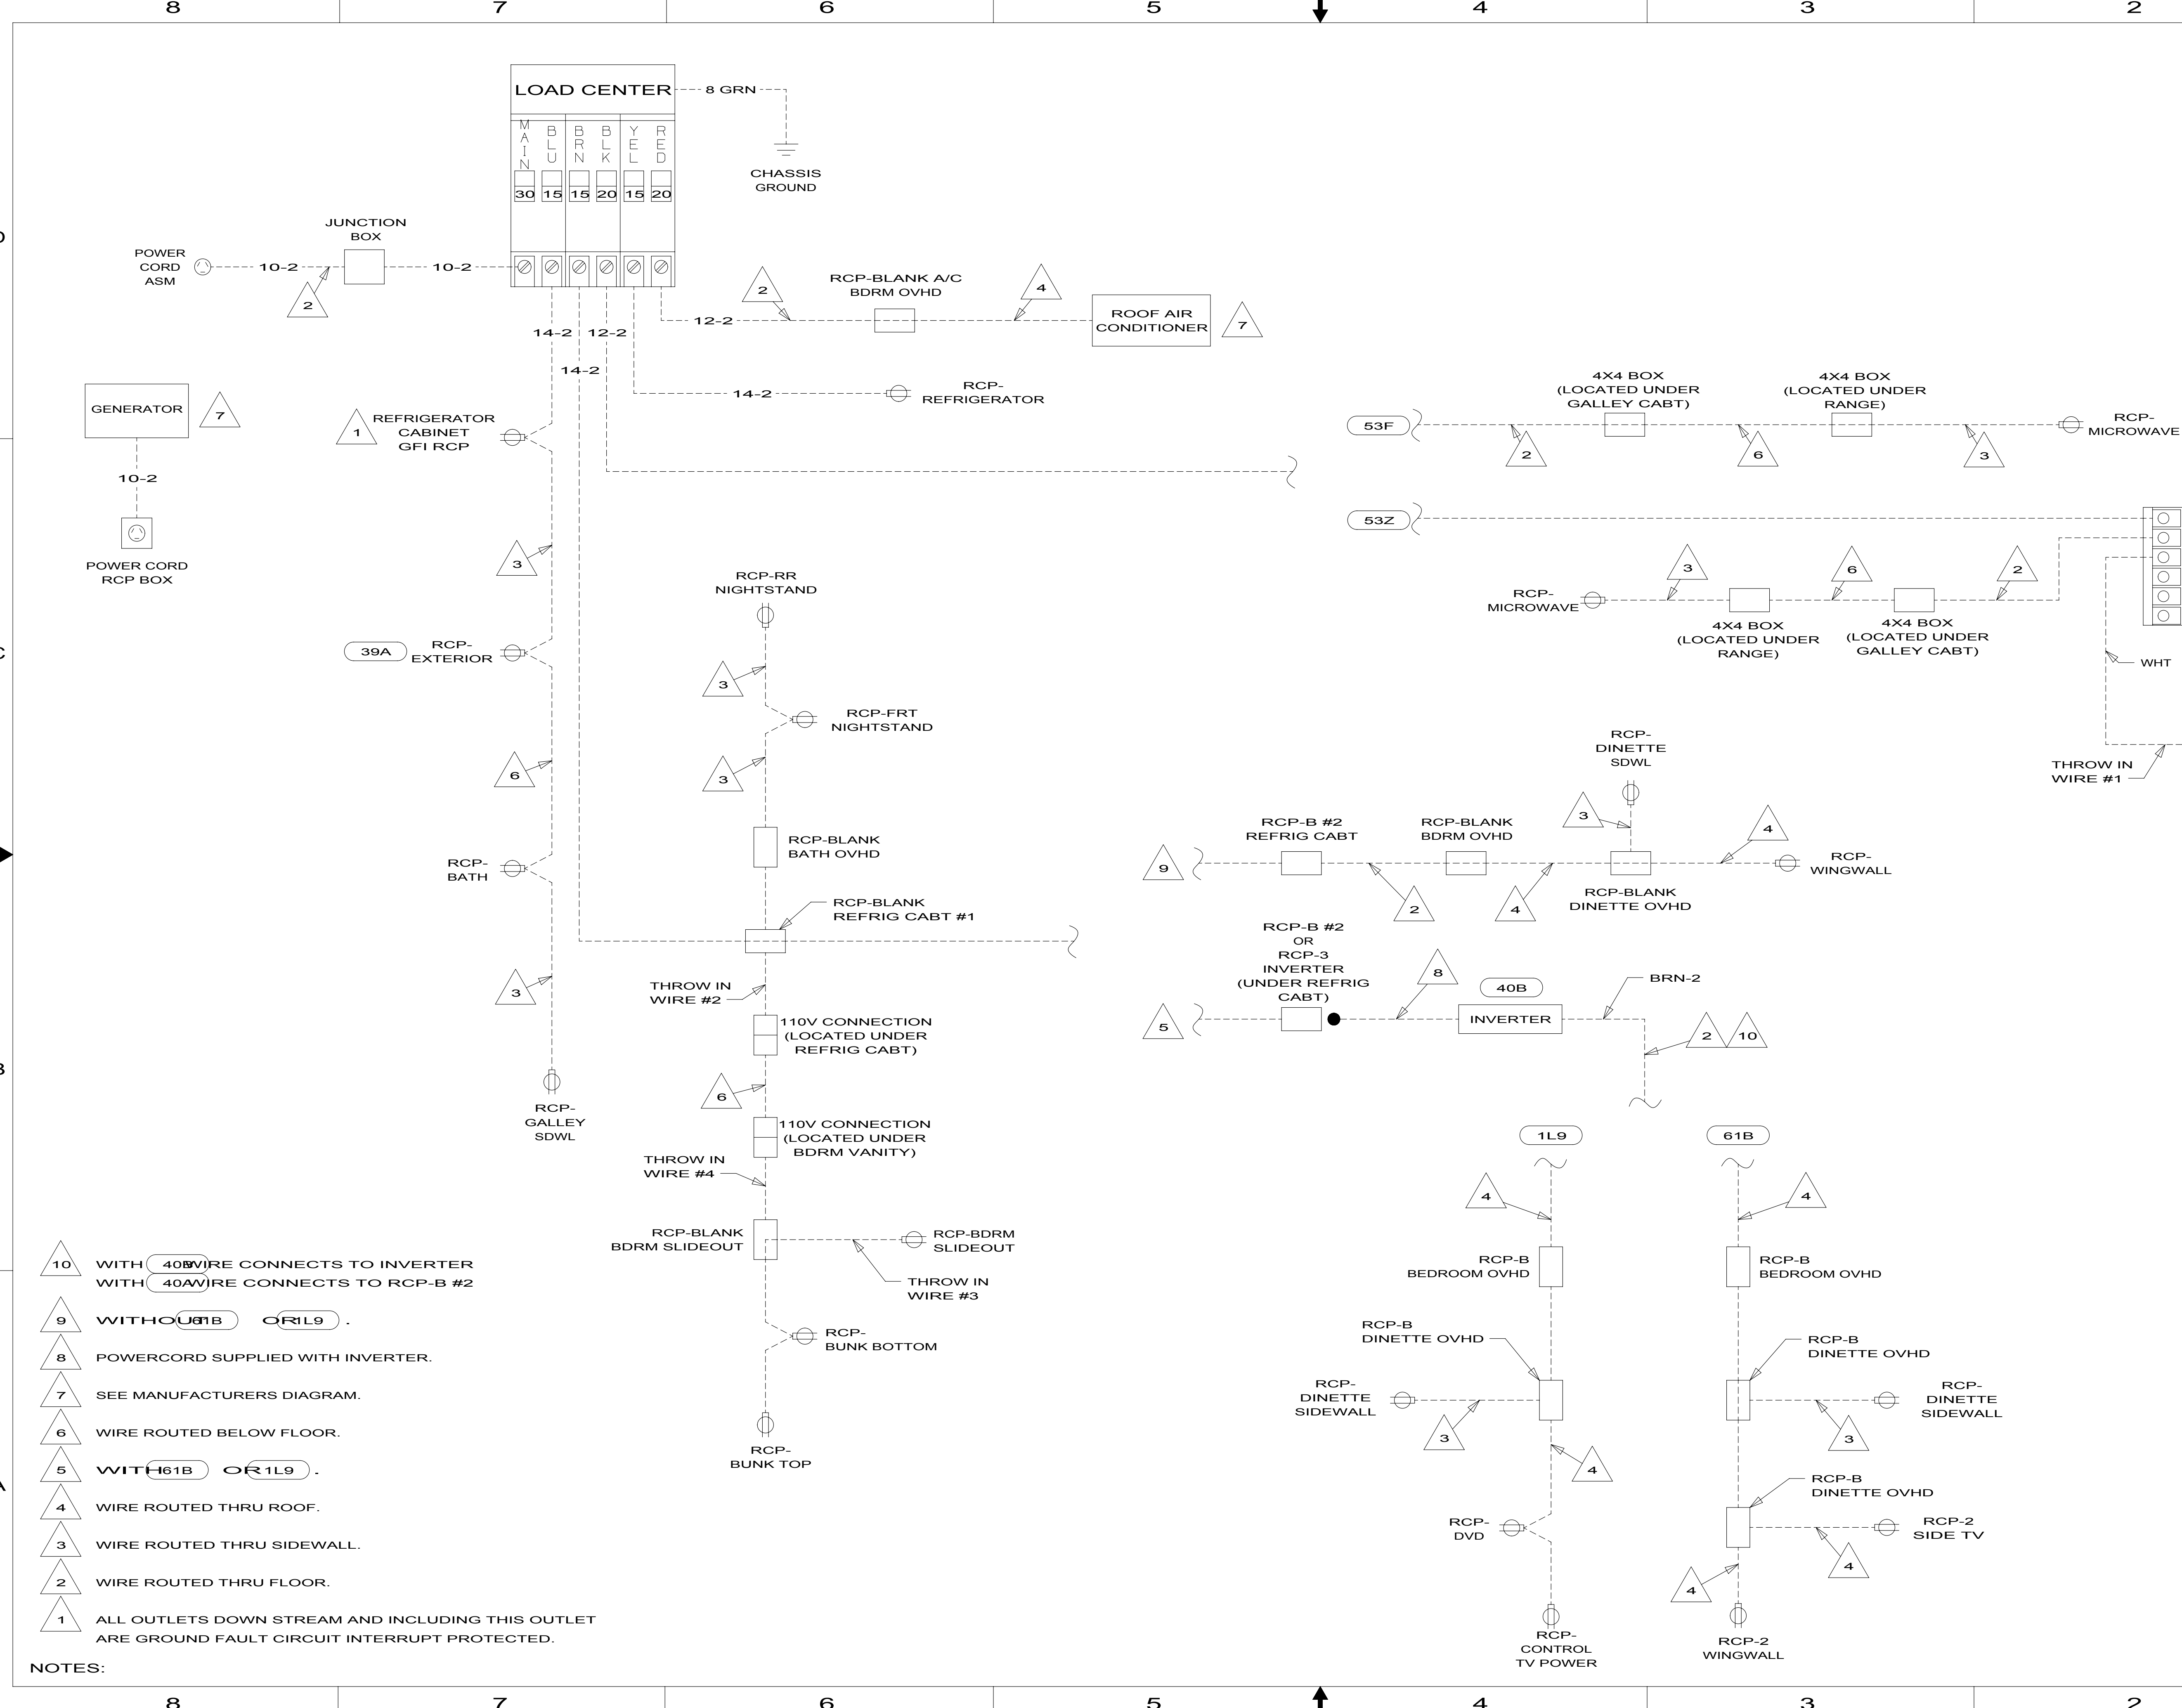

- NOTES:
- 10 WITH (40B) WIRE CONNECTS TO INVERTER WITH (40A) WIRE CONNECTS TO RCP-B #2
 - 9 WITHOUT (40B) OR (1L9)
 - 8 POWERCORD SUPPLIED WITH INVERTER.
 - 7 SEE MANUFACTURERS DIAGRAM.
 - 6 WIRE ROUTED BELOW FLOOR.
 - 5 WITH (61B) OR (1L9)
 - 4 WIRE ROUTED THRU ROOF.
 - 3 WIRE ROUTED THRU SIDEWALL.
 - 2 WIRE ROUTED THRU FLOOR.
 - 1 ALL OUTLETS DOWN STREAM AND INCLUDING THIS OUTLET ARE GROUND FAULT CIRCUIT INTERRUPT PROTECTED.

- (53F) WATER HEATER-ELEC. IGNITION
- (53Z) WTR HTR-6GAL/110/LP/MTR/AUTO
- (61B) TV-26"AC, STEREO SYS, VDEO SEL
- (39A) EXT RECEPTACLE DPLX 120VAC
- (1L9) ENTERTAINMENT CENTER-CABOVER
- (12D) ELECTRICAL SYSTEM 30 AMP
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS-USA

		COPYRIGHT 2011 WINNEBAGO INDUSTRIES, INC.	
DFT-ORIG	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHKR		FIRST USED	
P.E.		13 231J/JP	
M.E.		UNSPECIFIED TOLERANCES ARE:	
DSNR		WHOLE DIM (X)	:
		ONE-PLACE (X.X)	:
		TWO-PLACE (X.XX)	:
		ANGLE	:
		THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING		REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	
TITLE: WIRING DIAGRAM-BODY 110V			
SHEET 1 OF 1	PART NO 182491	REV	

D
C
B
A

8
7
6
5
4
3
2
1

1
2
3
4
5
6
7
8