





DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

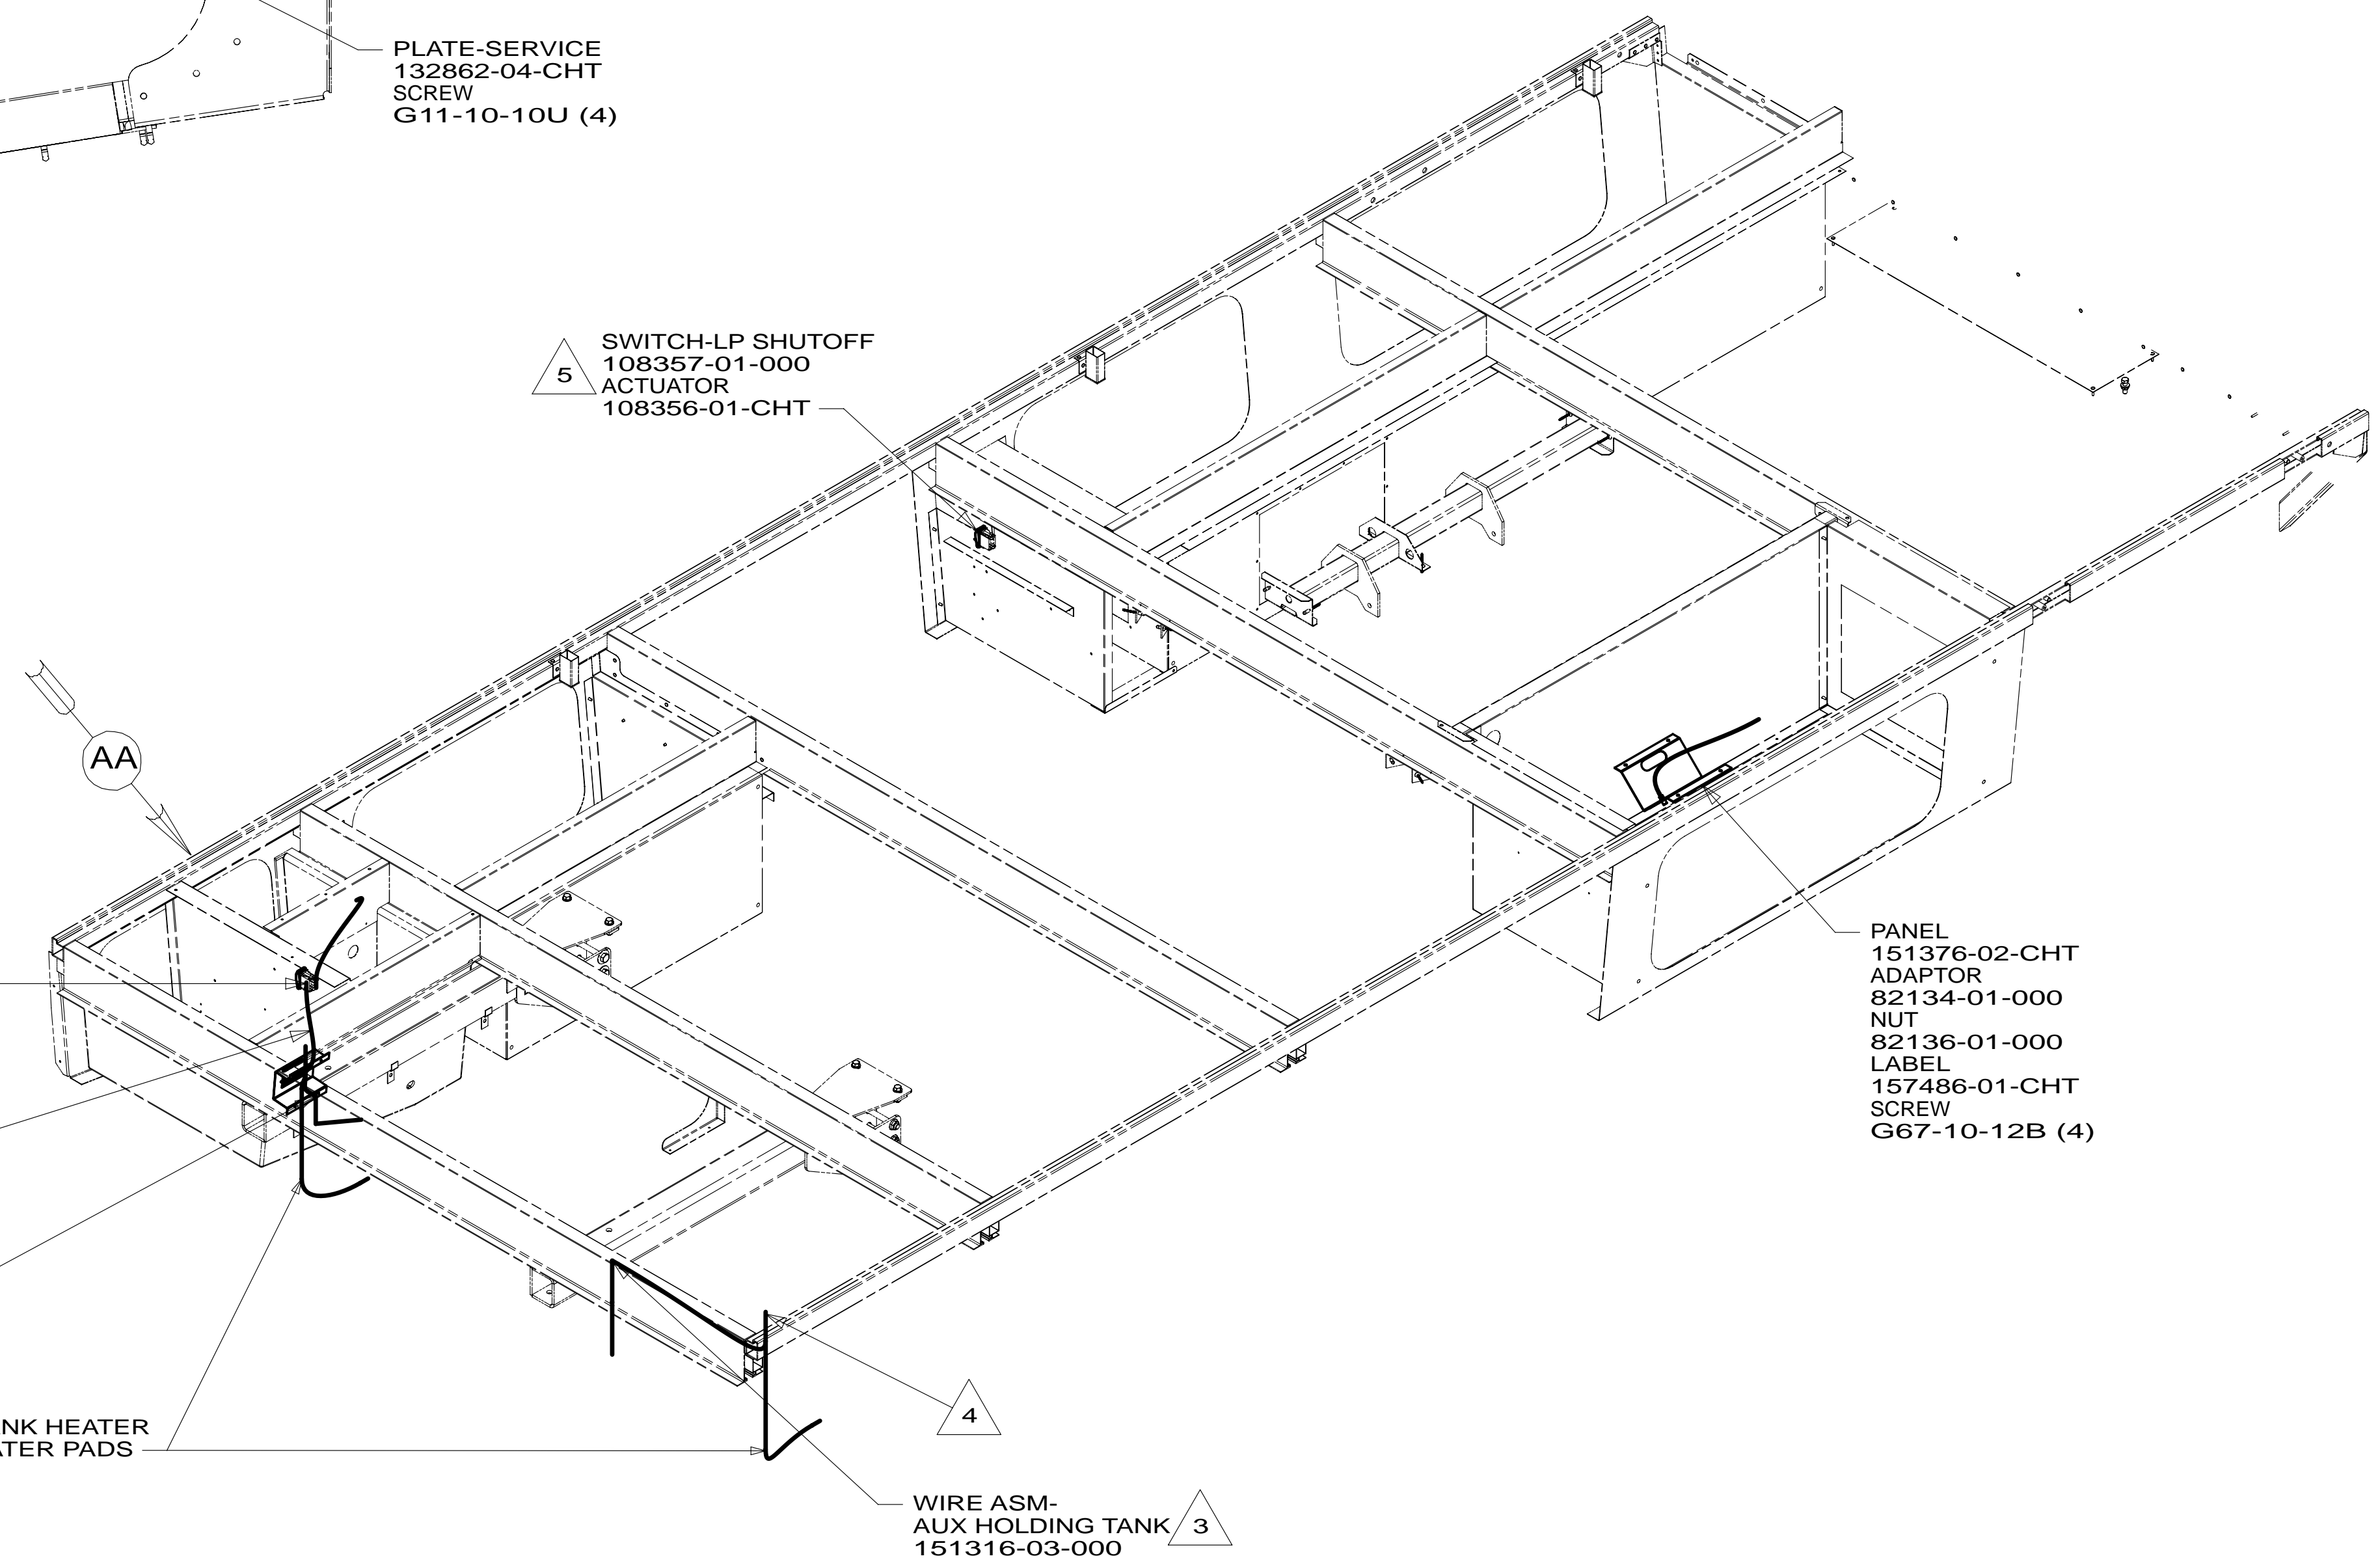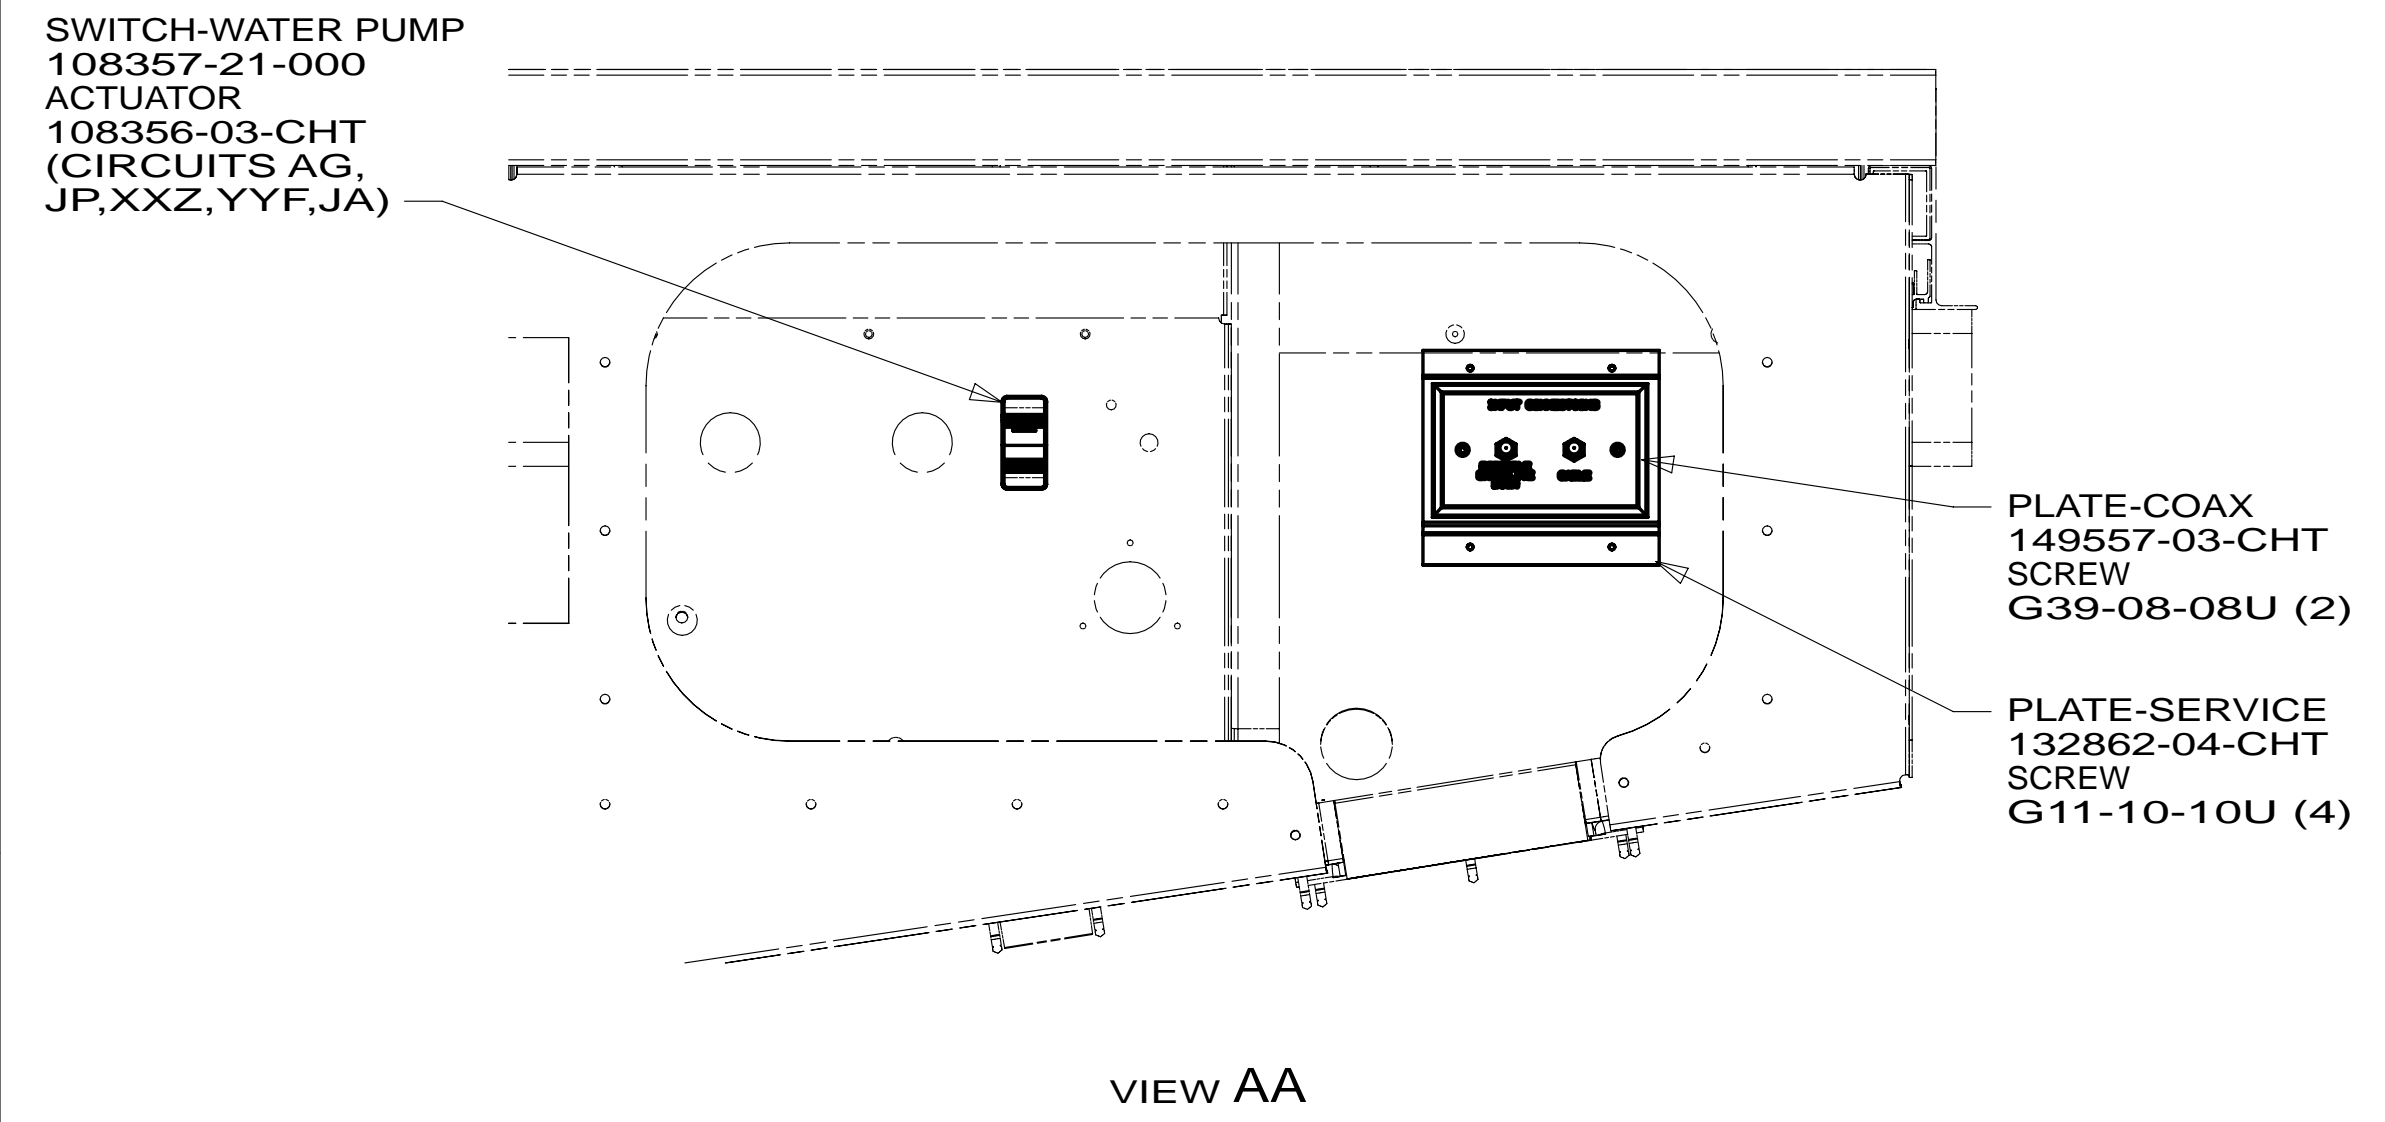

- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 WIRE PASSES THROUGH FLOOR IN THIS AREA.
- 3 PLACE CROSS LOCATOR ON SENSORS OVER DIMPLES ON TANK.

2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASSOVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 23T DRAINAGE SYSTEM-HEATED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

		COPYRIGHT 2013 WINNEBAGO INDUSTRIES, INC.
DTR	ORIG. DATE	
CHKR		ALL DIMENSIONS ARE IN MILLIMETERS
P.E.		
M.E.	FIRST USED	
DSNR		13 H25R
UNSPECIFIED TOLERANCES ARE:		MATERIAL:
WHOLE DIM (X)	: 3	X
ONE-PLACE (X.X)	: 1.5	X
TWO-PLACE (X.XX)	: 0.50	X
ANGLE	: 1°	X
THIRD ANGLE PROJECTION		X
DO NOT SCALE DRAWING	REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	
TITLE: WIRING INSTL-BODY, 12V		
SHEET 1 OF 6	PART NO	182565
REF:	1	07-Jan-2013


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



* 182565 *

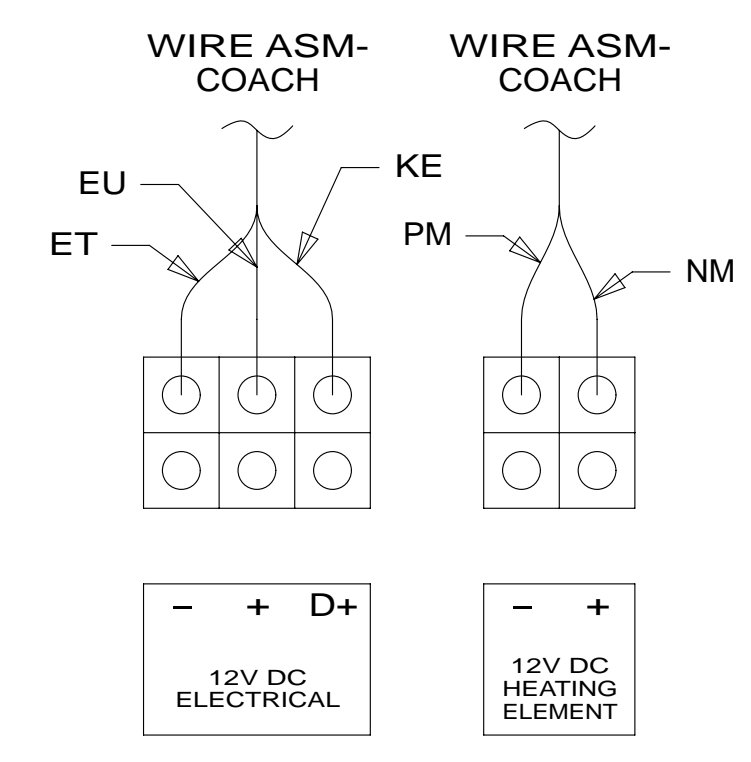

DETAIL CA
(BACK SIDE OF REFRIGERATOR)

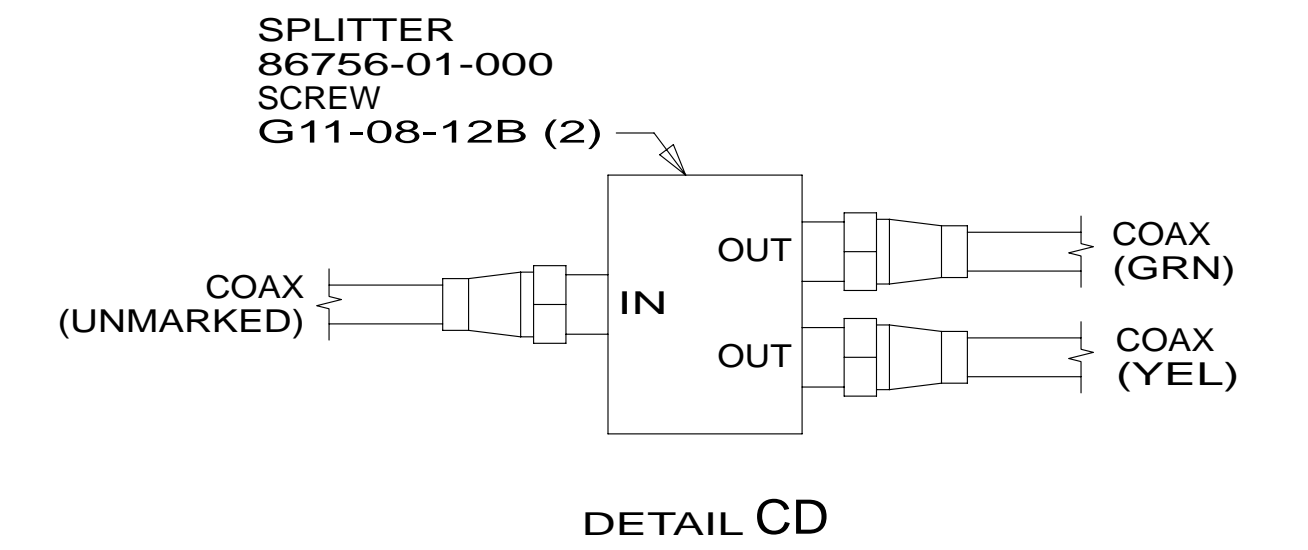

DETAIL CD

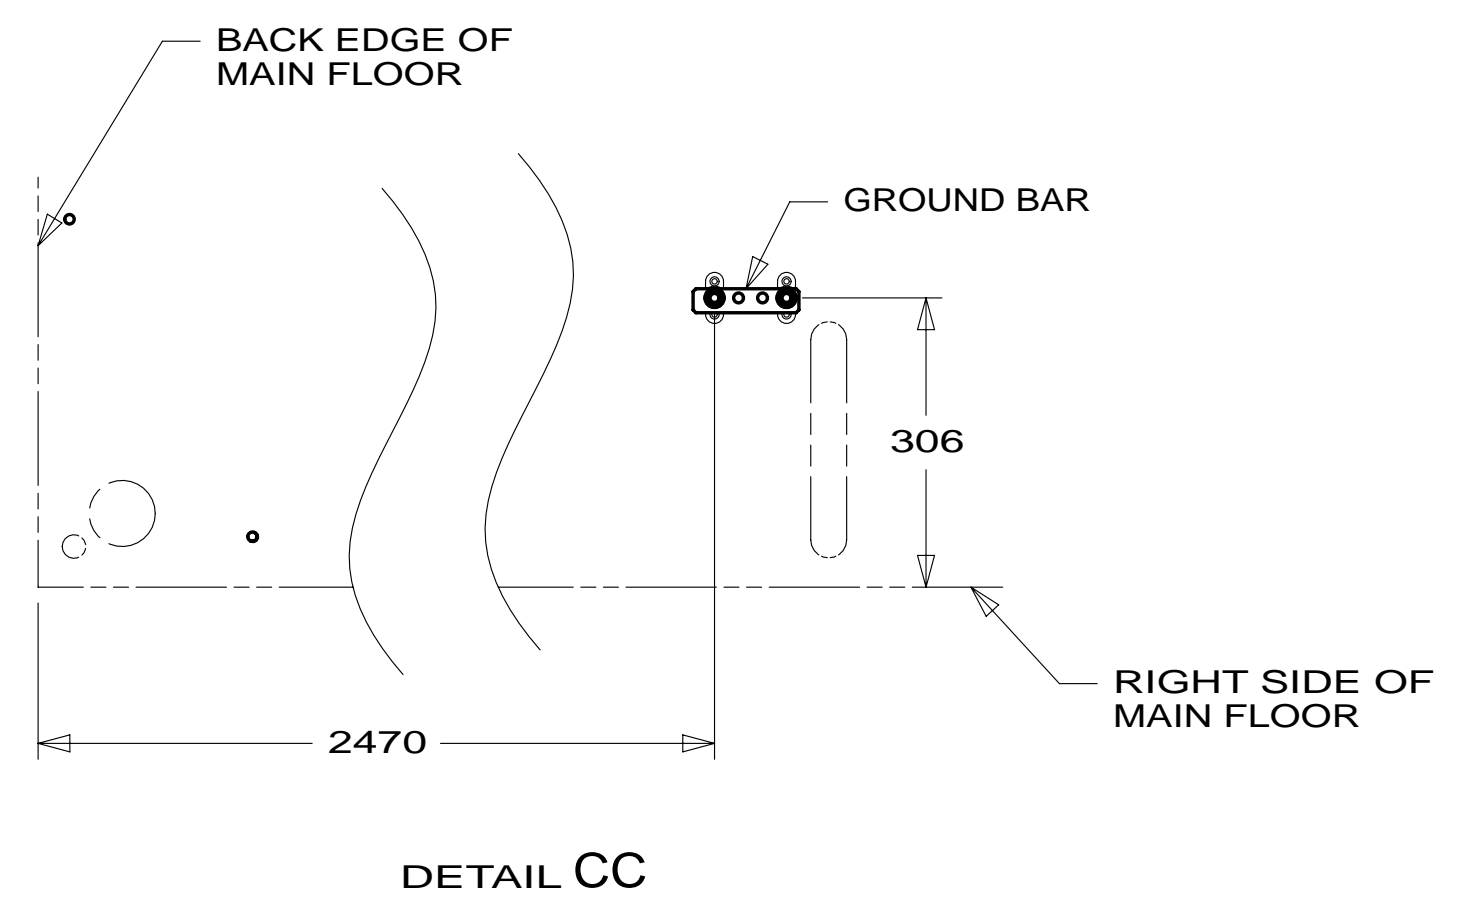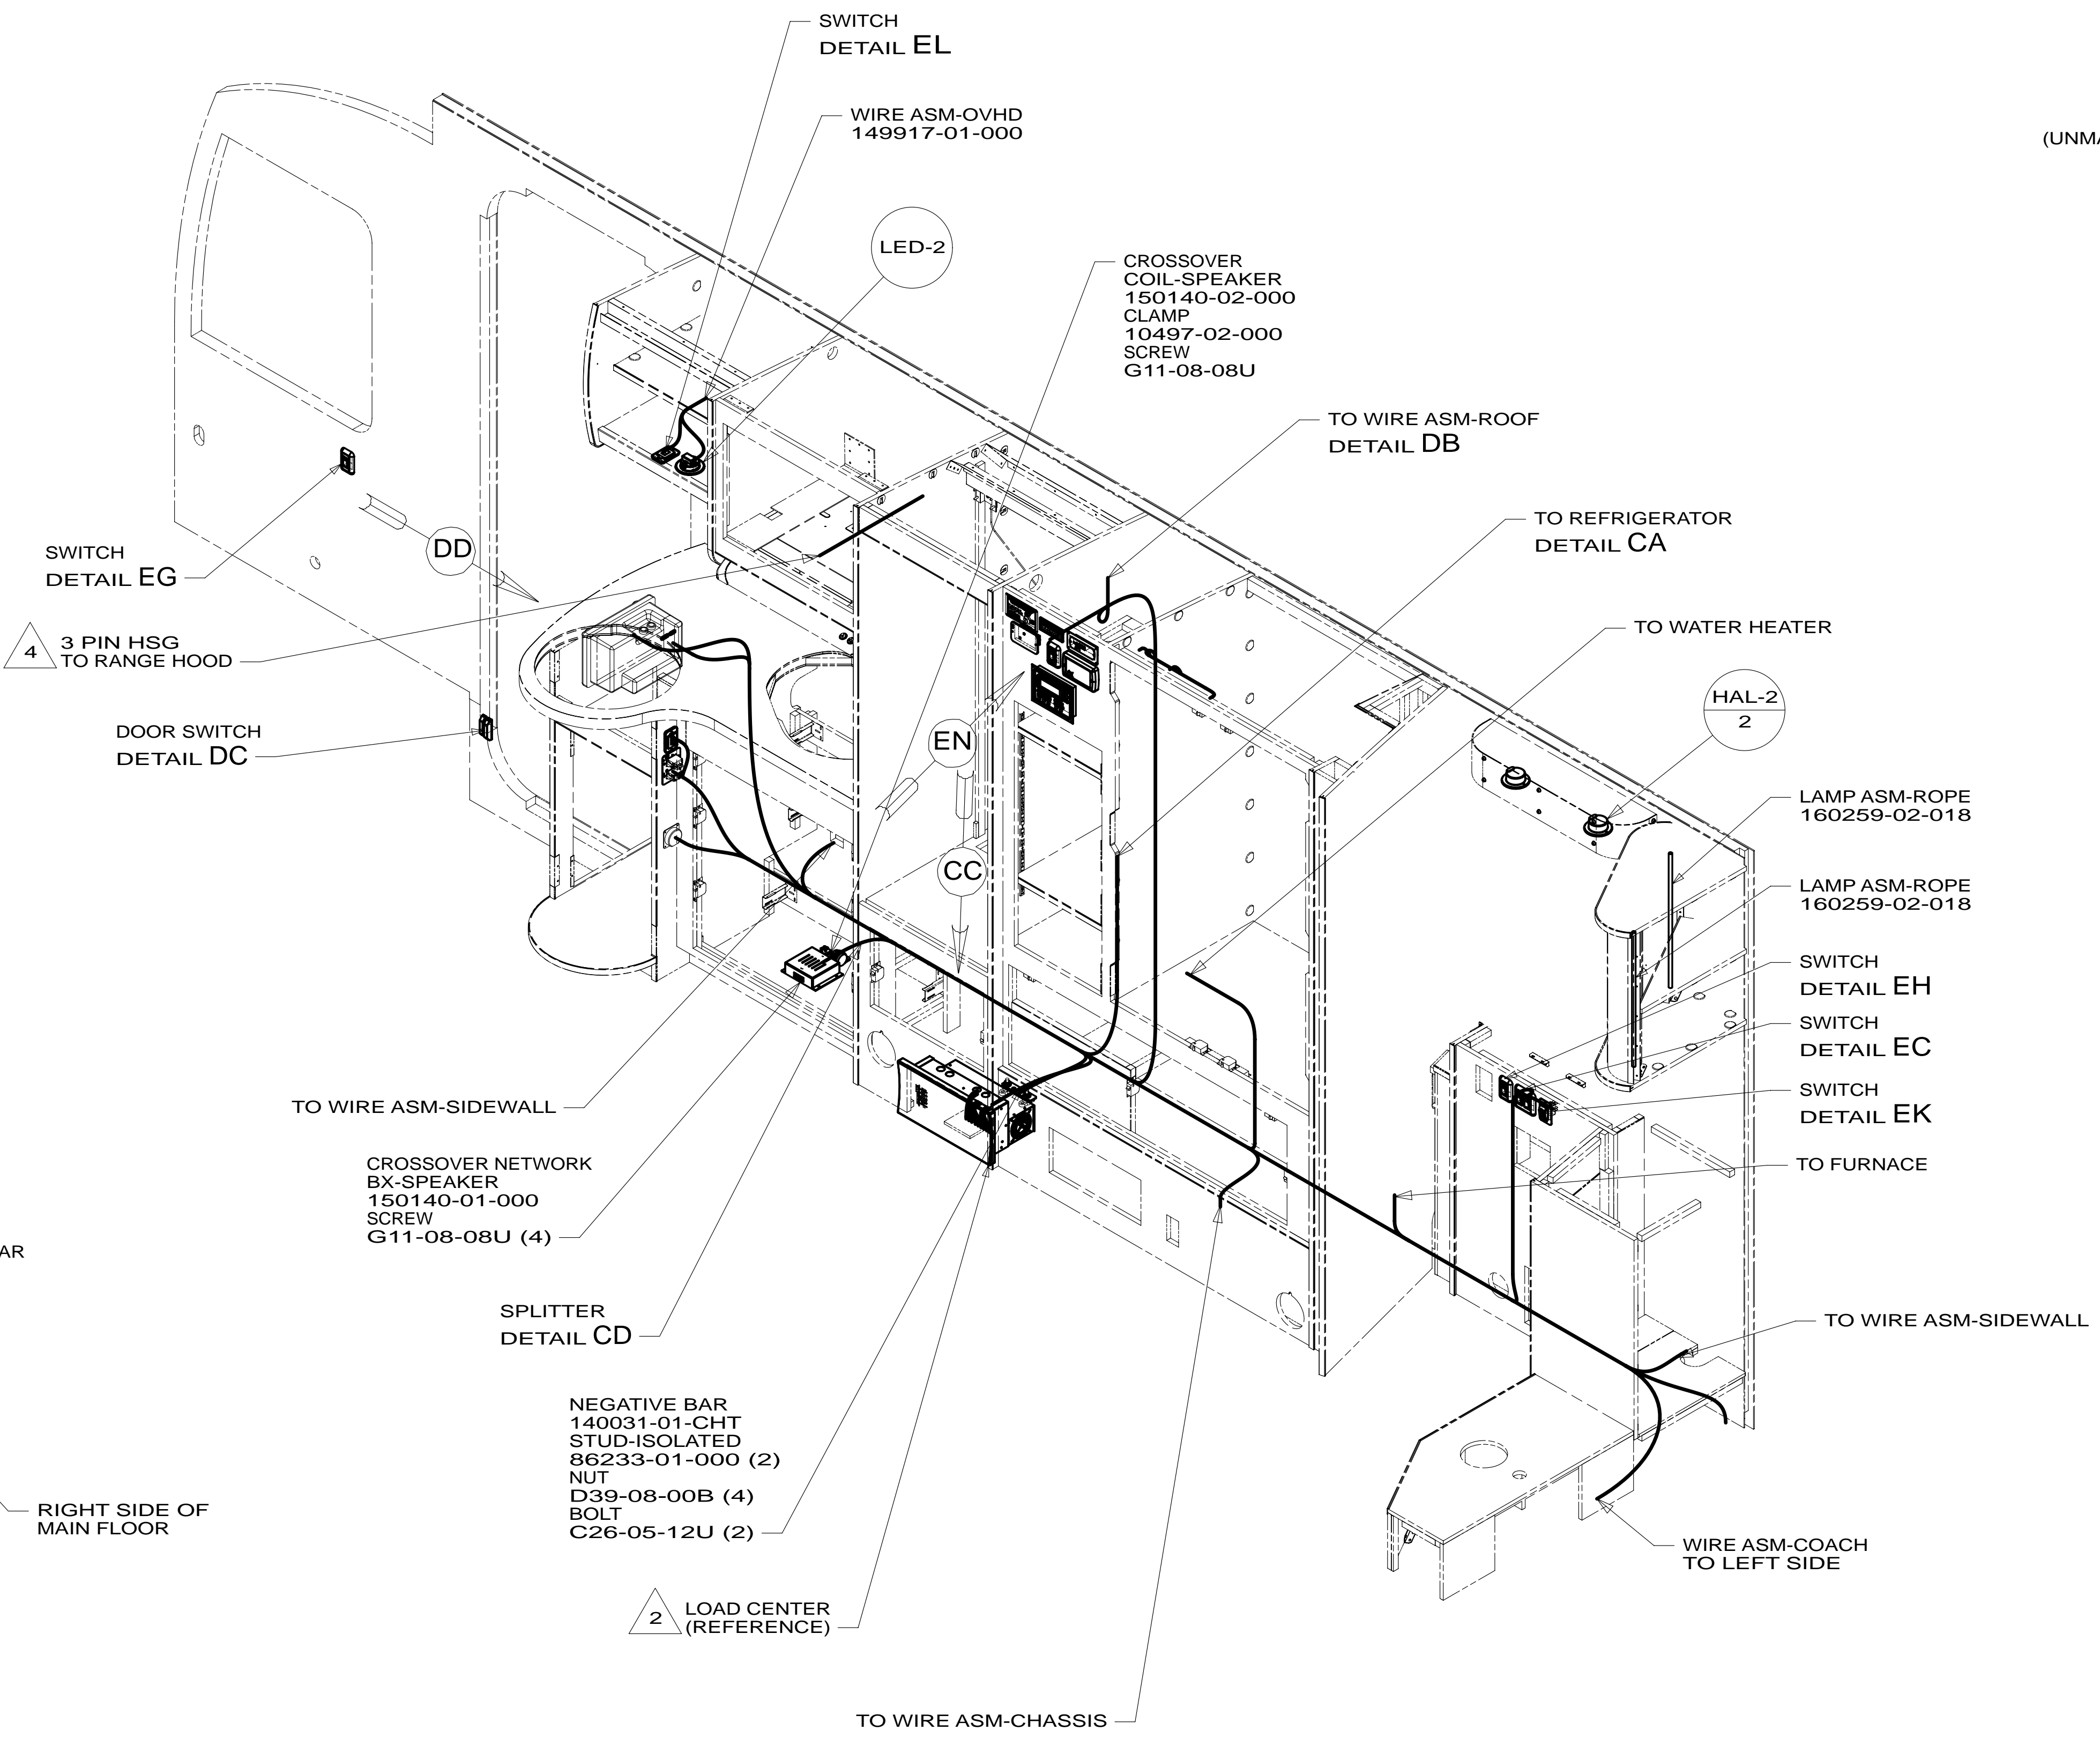

DETAIL CC

- 3 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
- 2 SEE LOAD CENTER/ATS FOR ADDITIONAL INFORMATION.

1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:




265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1	265
FIRST USED	
13 H25R	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY, 12V	
SHEET 3	PART NO 182565 REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

* 182565 * A

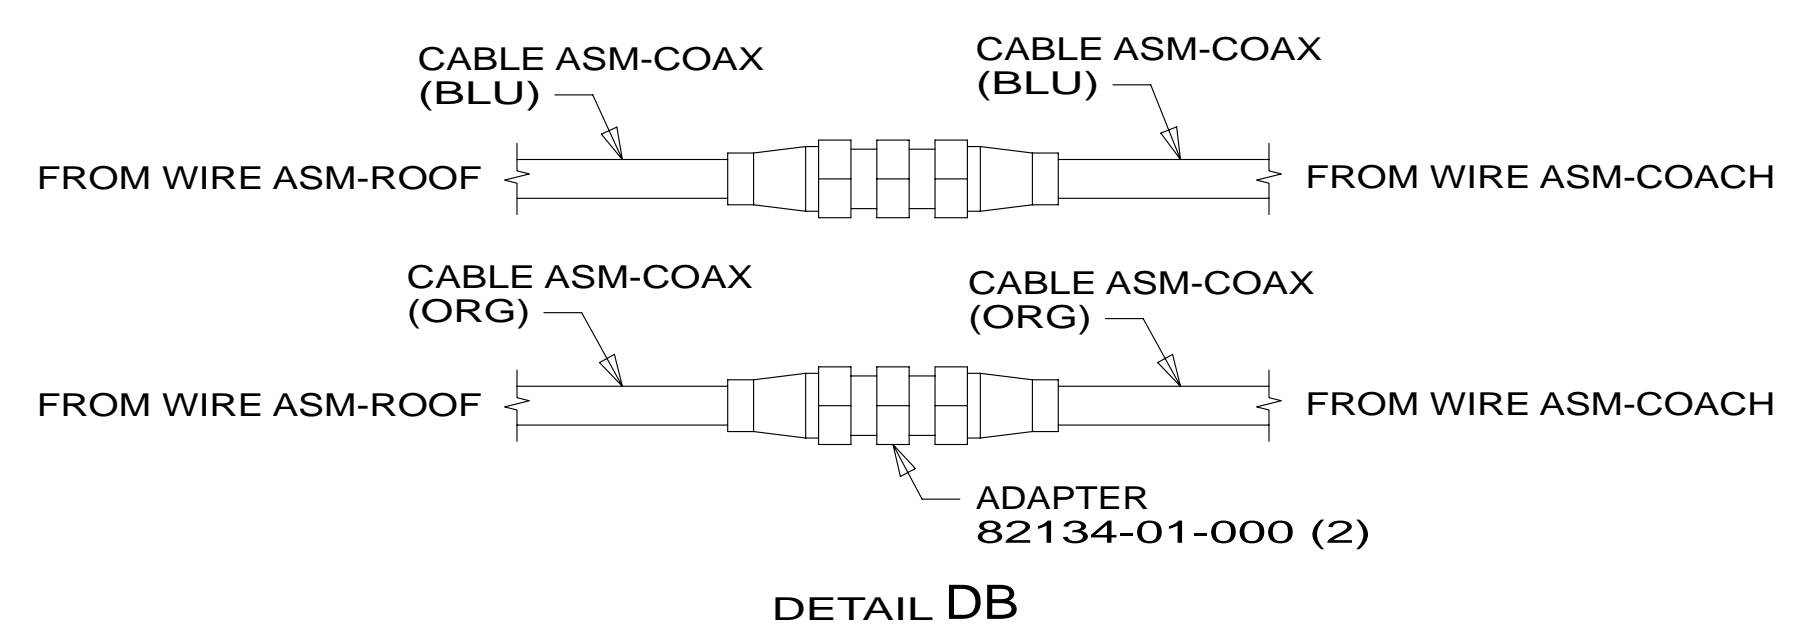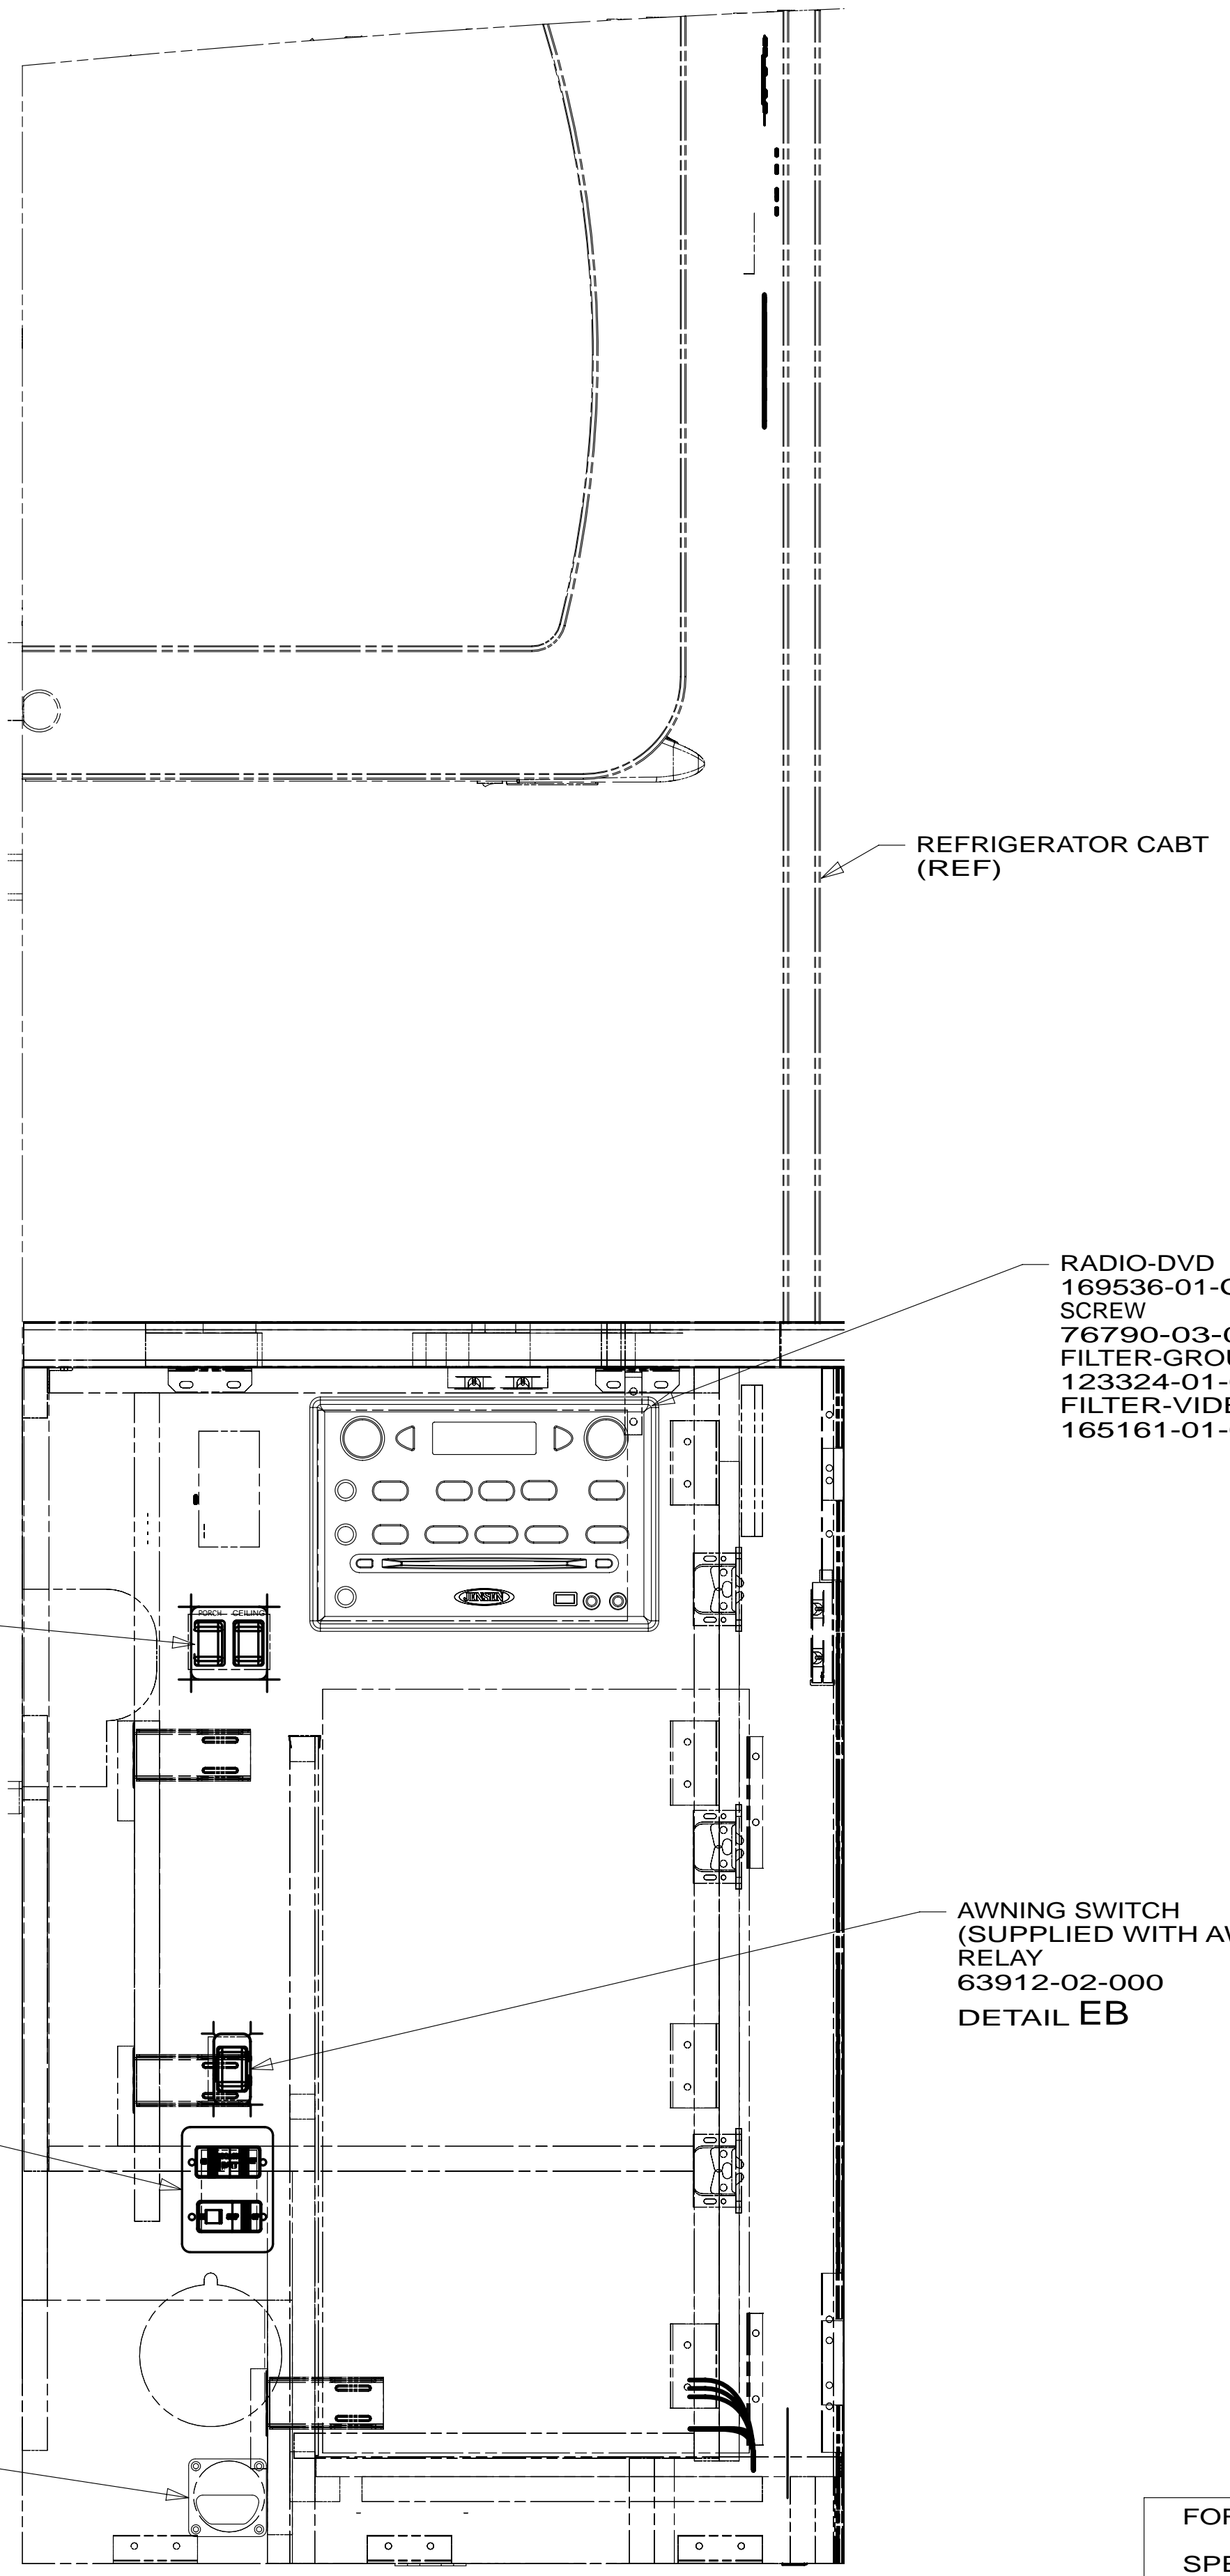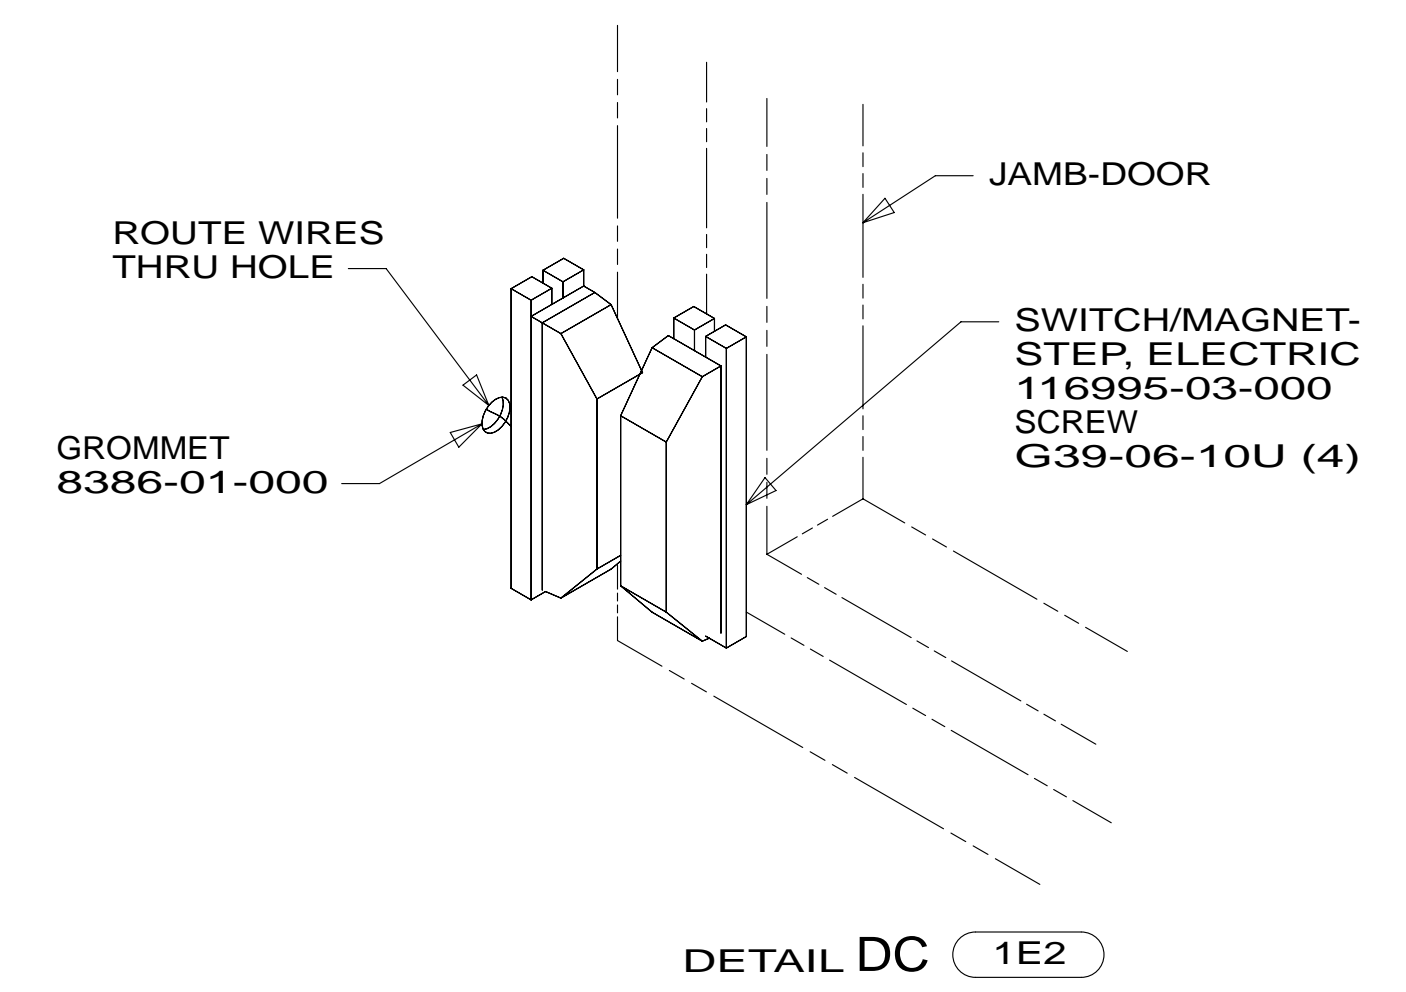

- NOTES:
- 3 CONNECT IN-LINE WITH YELLOW VIDEO CABLE. WRAP BOTH ENDS WITH TAPE 8363-01-000 TO SECURE TO WIRE ASM.
 - 2 CONNECT IN-LINE WITH RED AND WHITE AUDIO CABLES. WRAP BOTH ENDS WITH TAPE 8363-01-000 TO SECURE TO WIRE ASM.
 - 1 FOR REFERENCE ONLY. SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.


- 1E2 ENTRANCE STEP-ELEC.
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED	13 H25R	
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 4	PART NO 182565	REV
		07-Jan-2013


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


* 182565 *

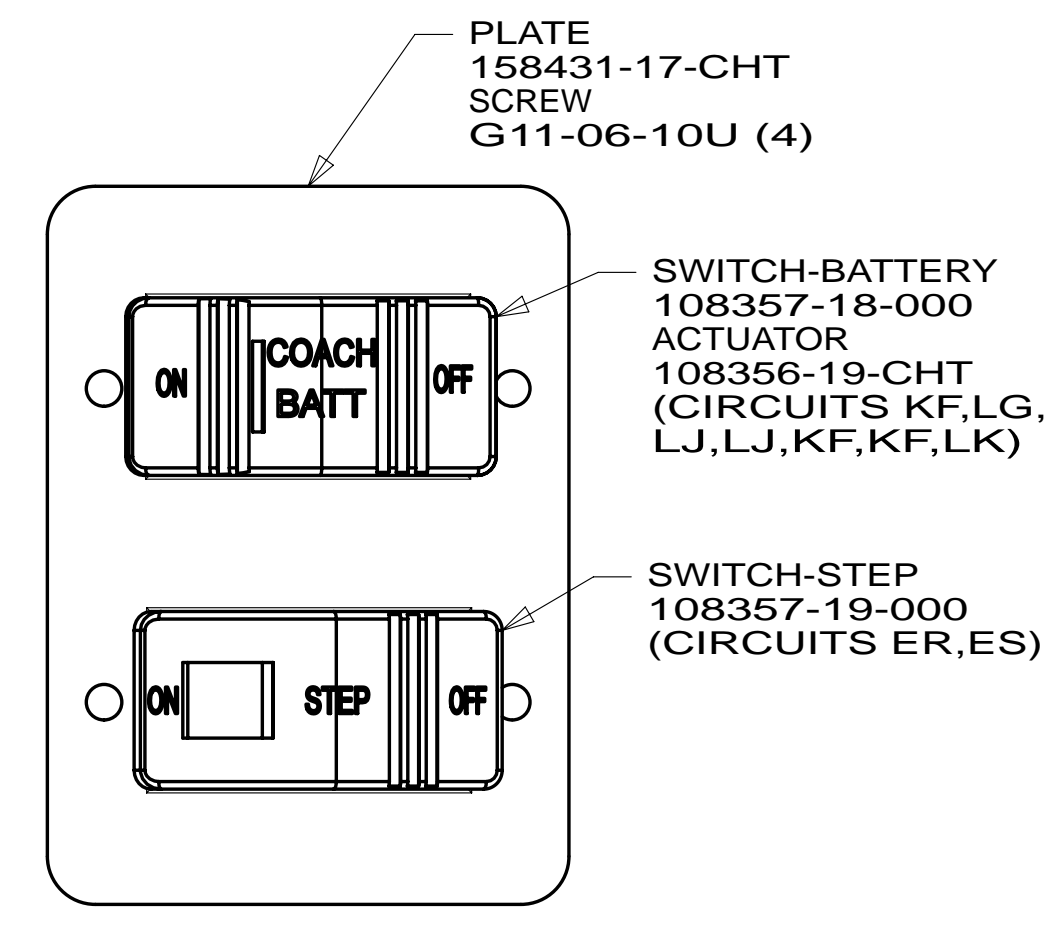


DETAIL EA

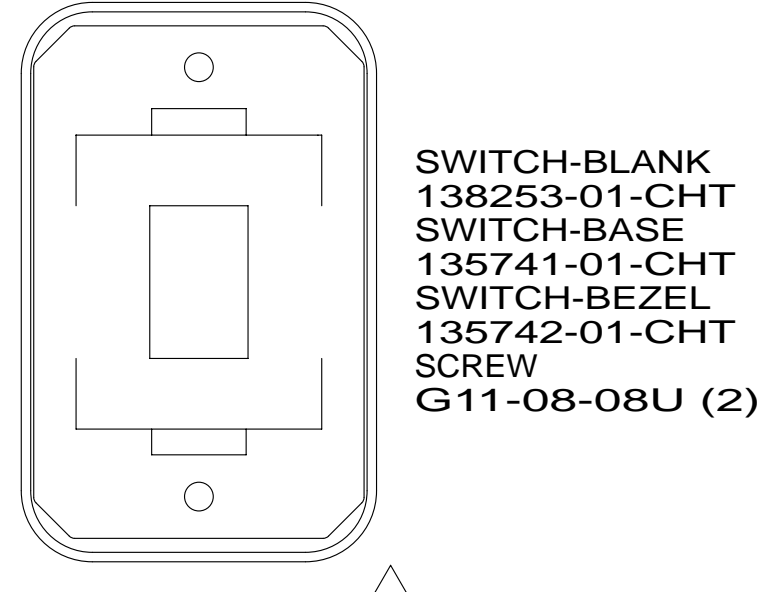


DETAIL EE ²

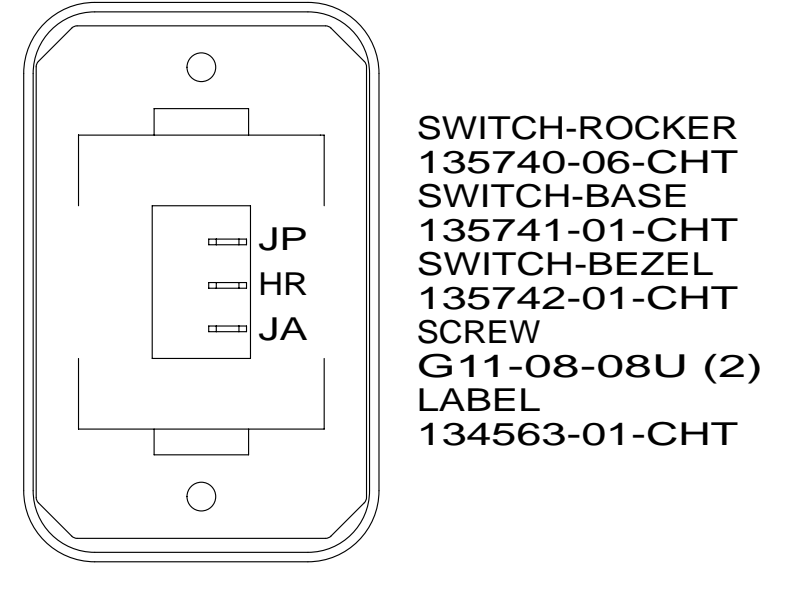

DETAIL EE ^{23T} OR ^{23R}

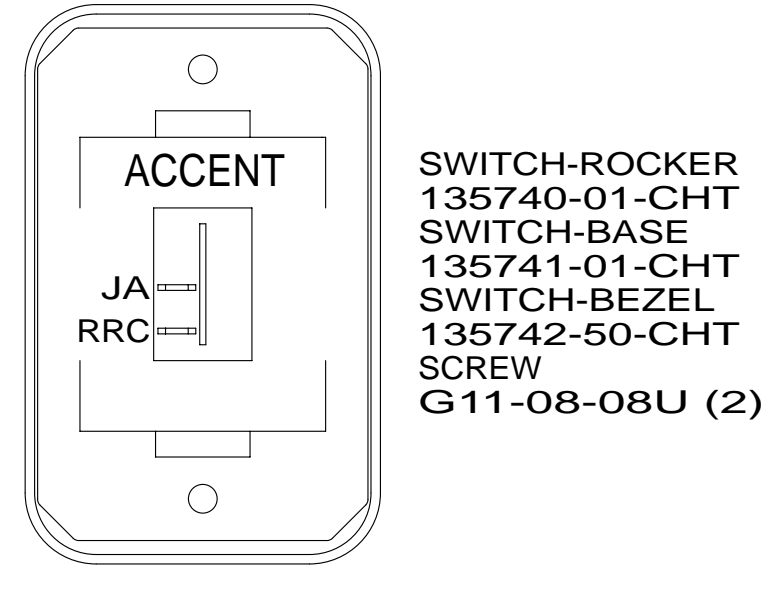


DETAIL EH

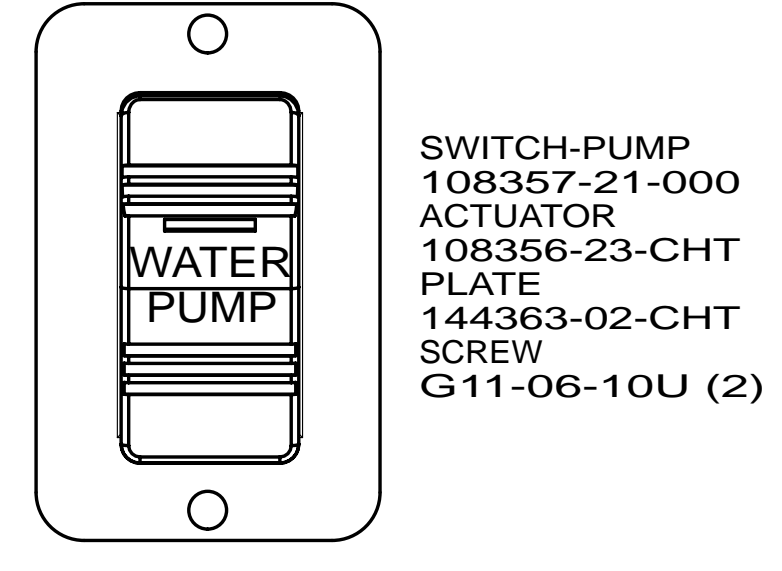


DETAIL EK


HOLDING TANK HEATER
TURN OFF When Not In Use
SEE OPERATORS MANUAL

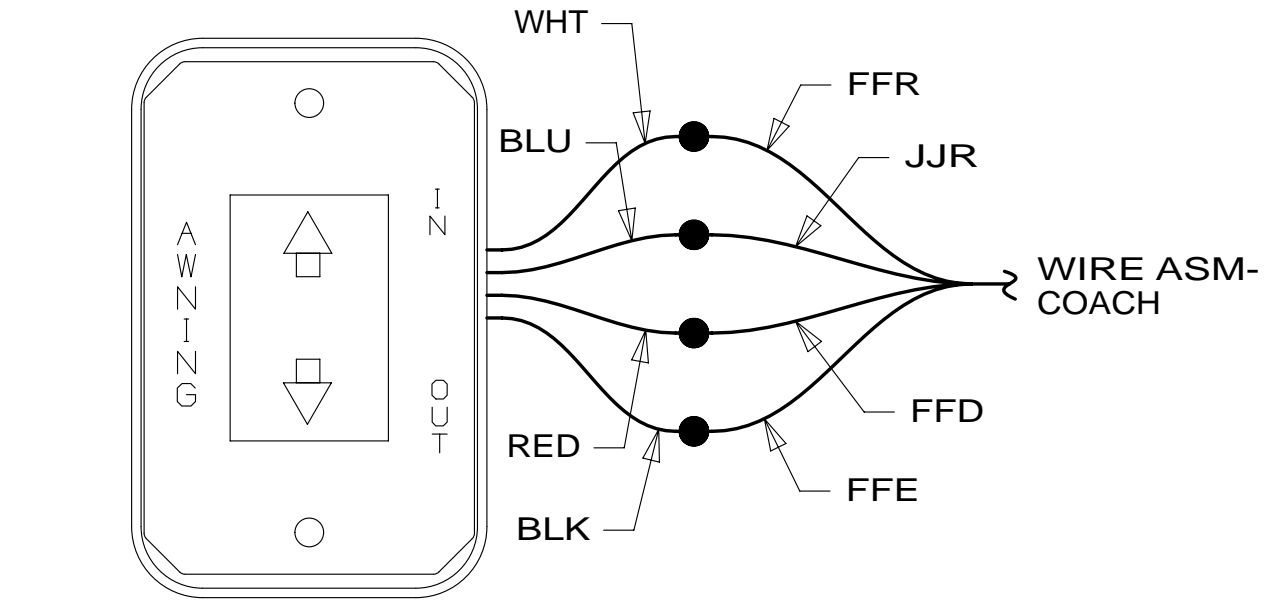


DETAIL EB (SUPPLIED WITH AWNING)

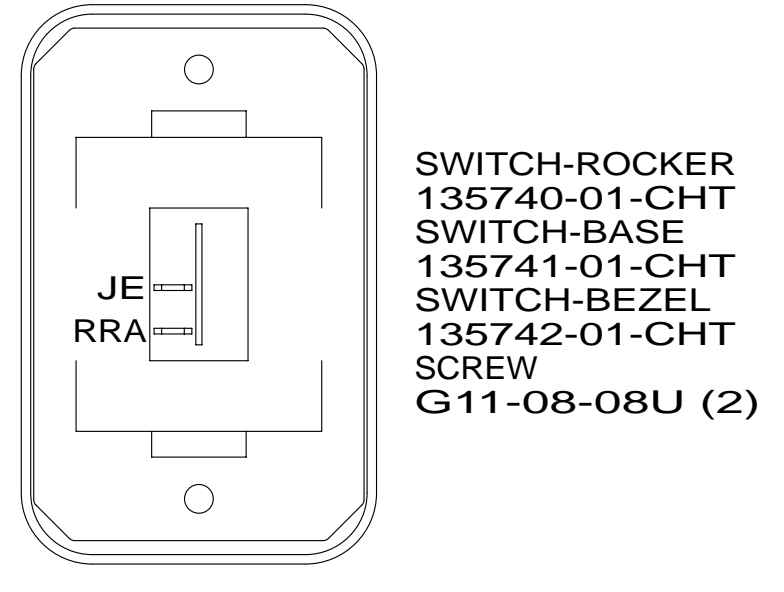


DETAIL EF

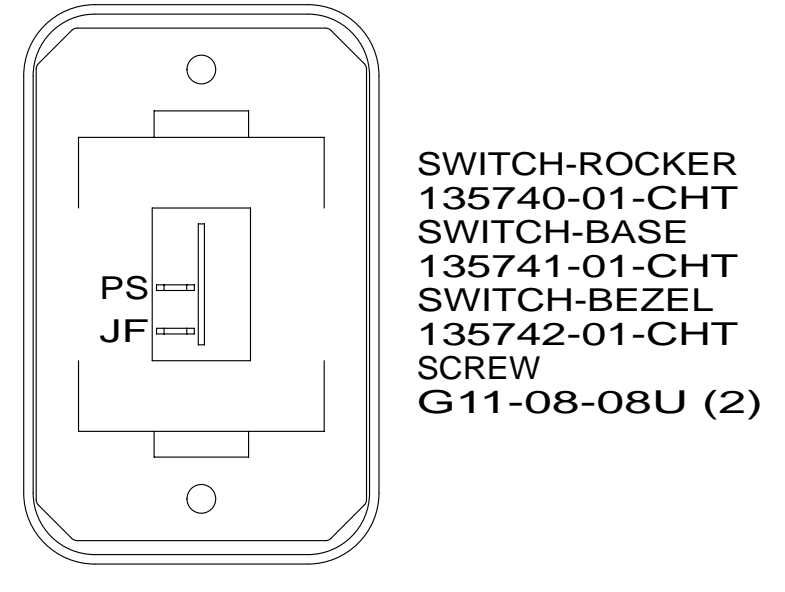


DETAIL EG

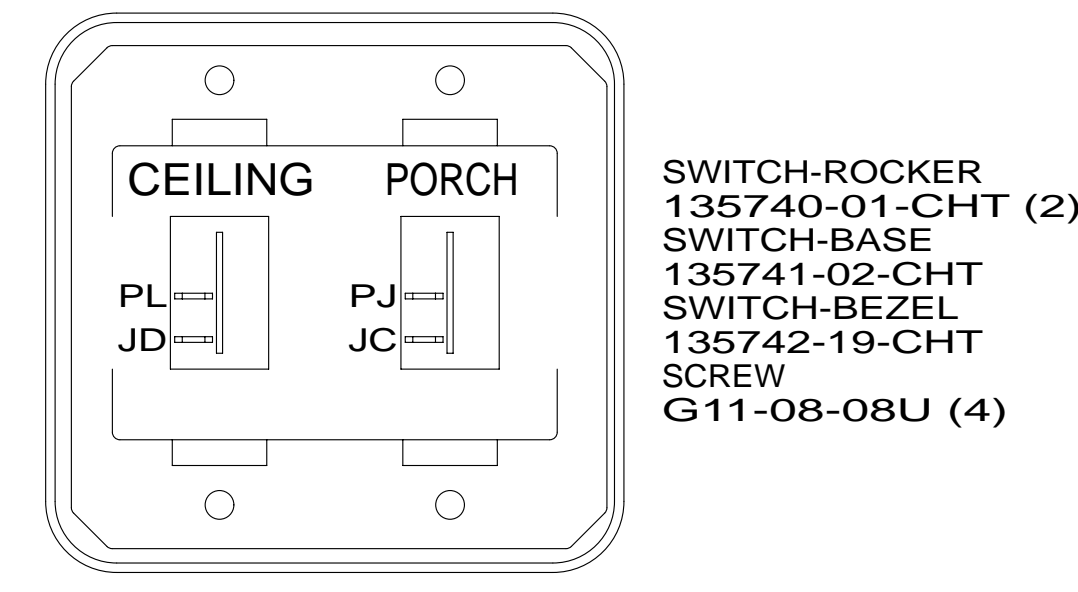


DETAIL EJ

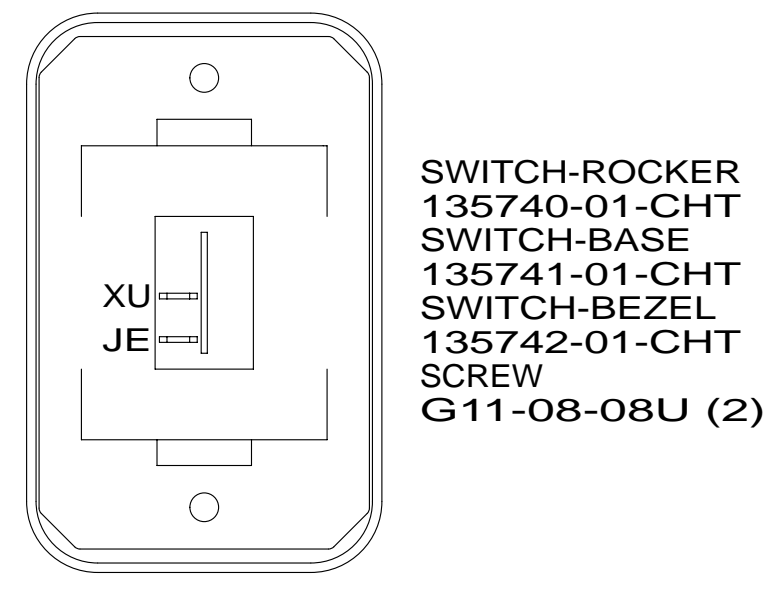

DETAIL EL

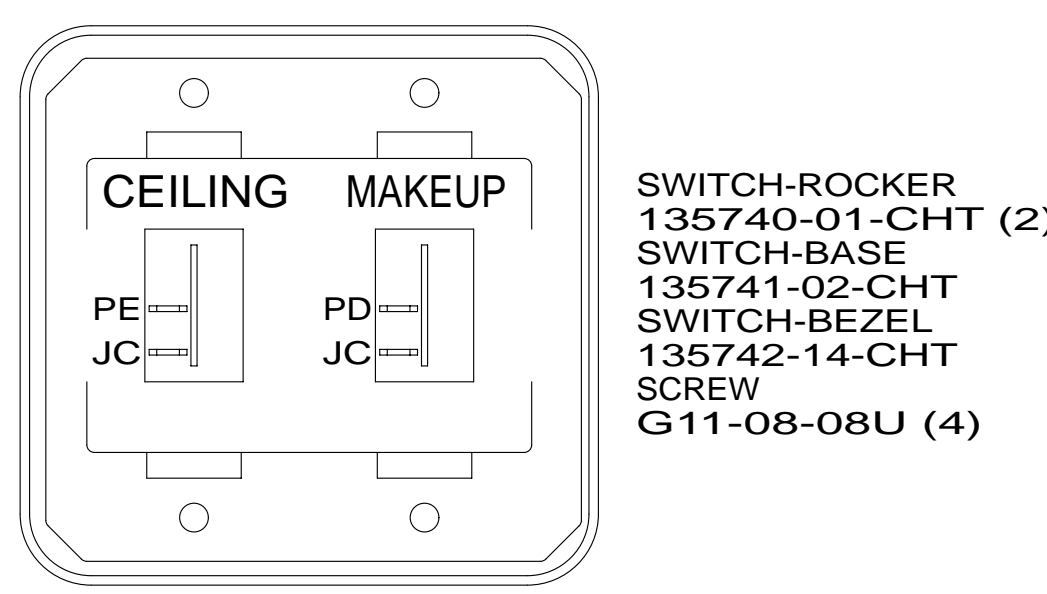


DETAIL EC

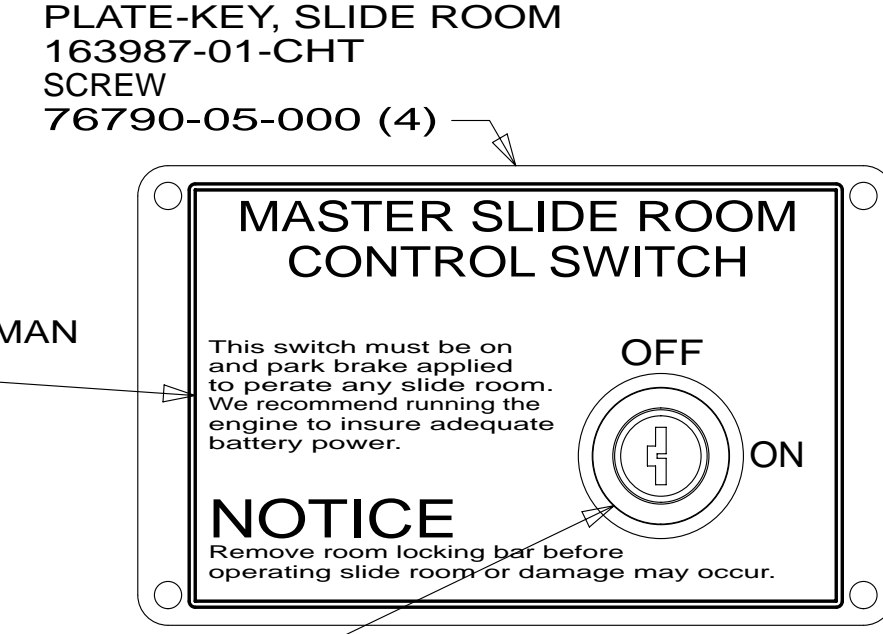


LABEL-SLIDROOM CONTROL, MAN 163988-01-CHT


SWITCH-KEY, SPST-ILLINOIS LCK 163097-01-000 (CONNECTS TO CIRCUITS DT & ER)

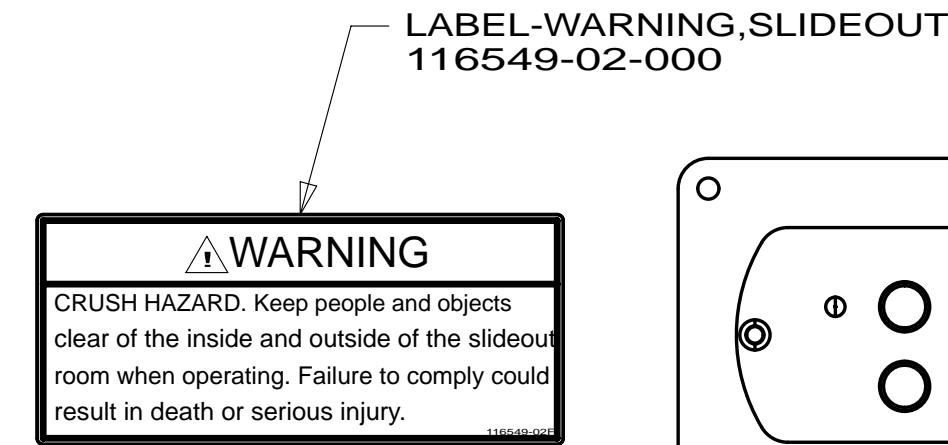


LABEL-WARNING, SLIDEOUT 116549-02-000

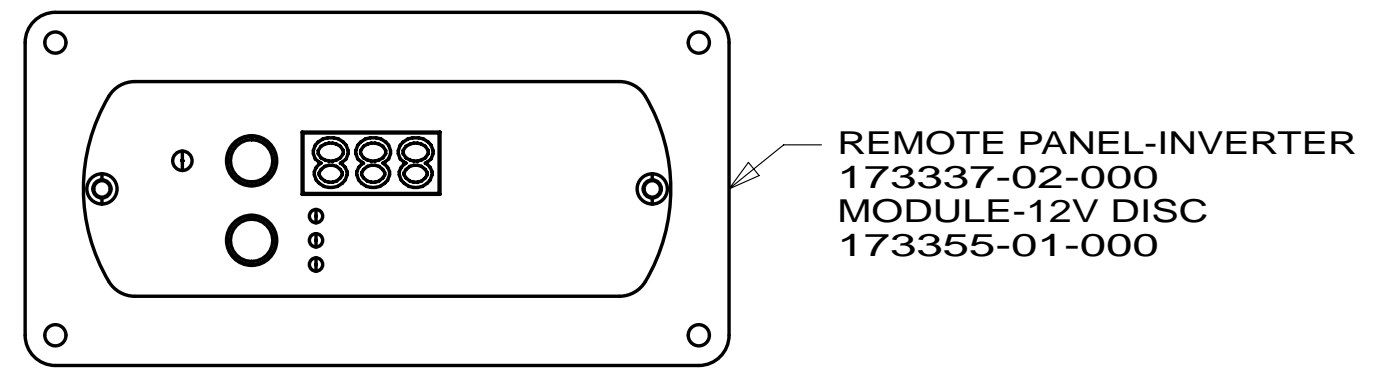

REMOTE PANEL-INVERTER 173337-02-000 MODULE-12V DISC 173355-01-000

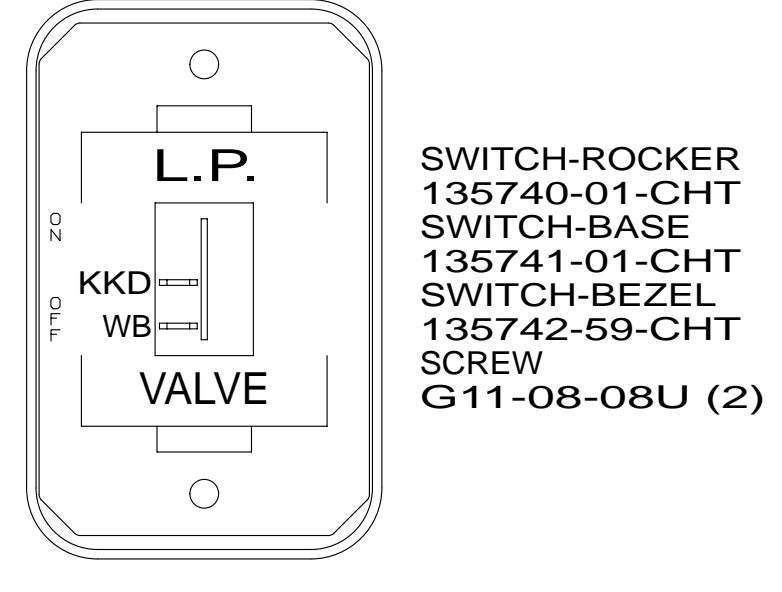


DETAIL EM

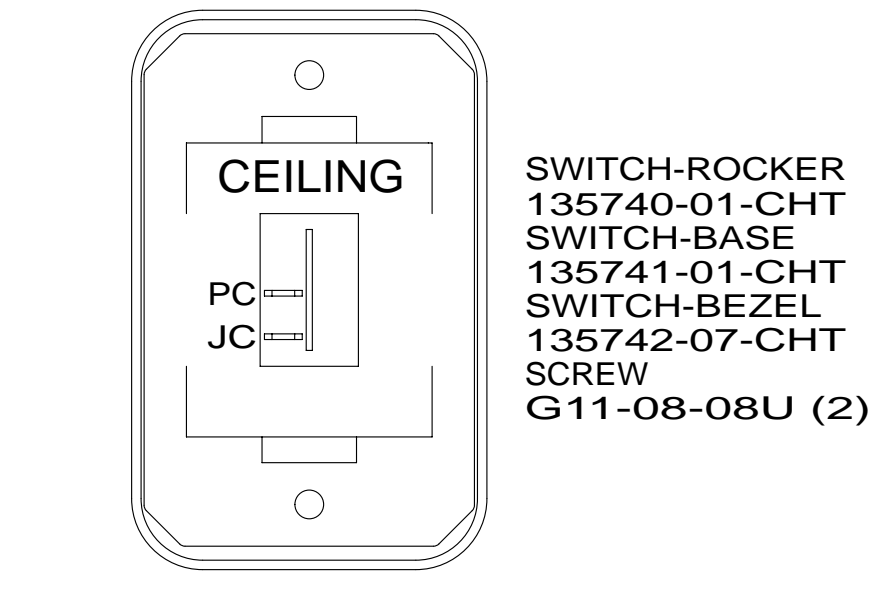


DETAIL ED


SWITCH-SLIDEOUT 165169-03-000 SCREW 76790-05-000

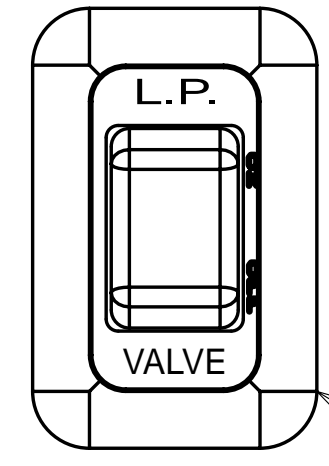

L.P. VALVE

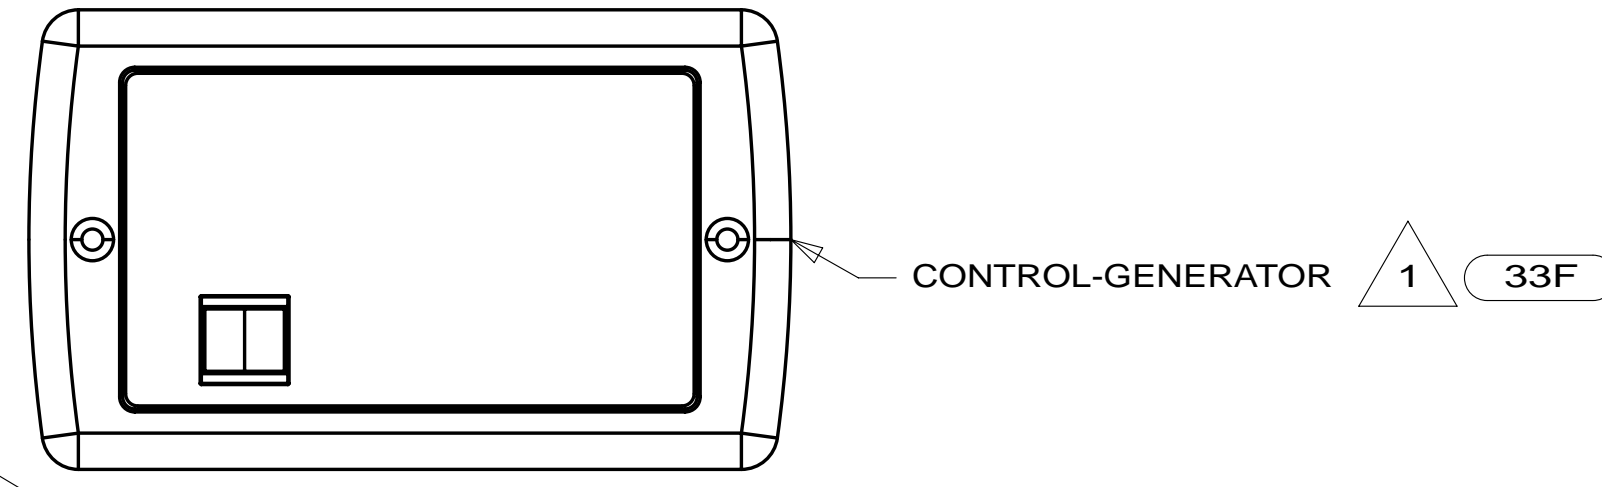

CONTROL-GENERATOR ¹ 33F

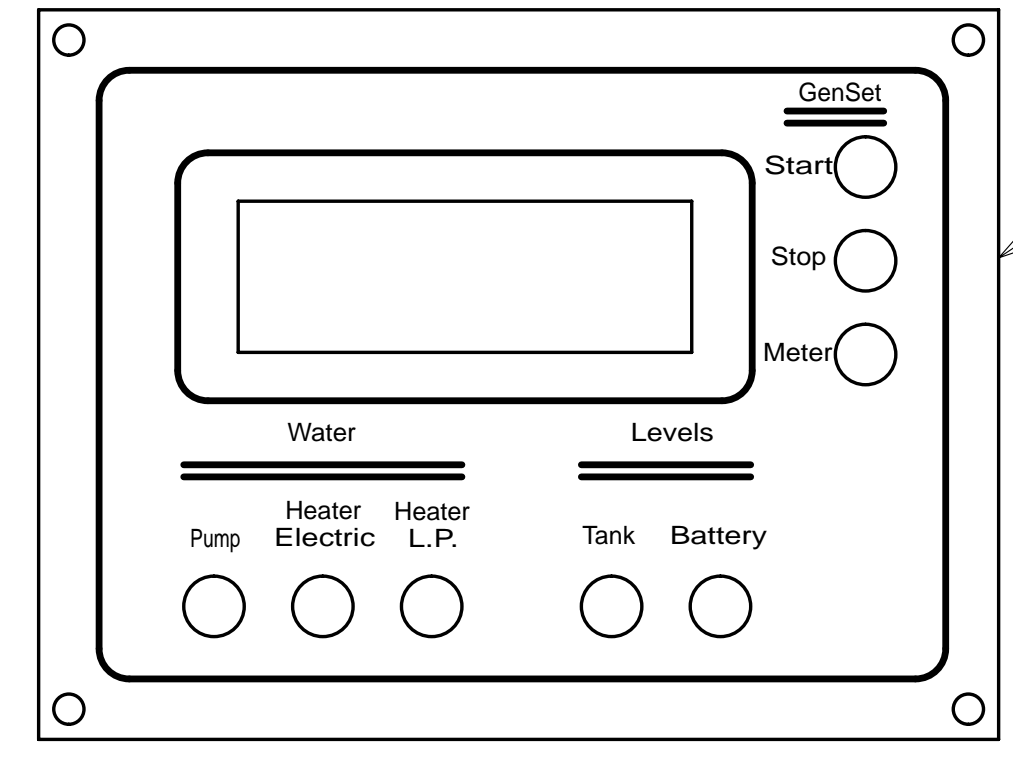

VIEW EN

SWITCH DETAIL EM

PANEL-MONITOR, LCD 175724-01-000 175724-02-000 SCREW G11-08-08U (4)

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000



- ^{33F} GEN-3.2 KW ONAN DIESEL
- ^{52G} GEN-3.6KW ONAN LP MICROQUIET
- ^{23R} DRAINAGE SYSTEM/HEAT-PREWIRE
- ^{53B} WTR HTR-6GAL ELECTRIC/LP GAS
- ^{23T} DRAINAGE SYSTEM-HEATED
- ^{1E2} ENTRANCE STEP-ELEC.
- ²⁶⁵ CODES/STANDARDS-CSA/CMVSS
- ^{1B1} CODES/STANDARDS USA

FIRST USED	
13 H25R	
DO NOT SCALE DRAWING	
WIRING INSTL-BODY, 12V	
SHEET 5	PART NO 182565 REV



NOTES:
² WITHOUT ^{23T} OR ^{23R}
¹ SUPPLIED WITH GENERATOR.

* 182565 * A

SATELLITE ELEVATION SENSOR
DETAIL FB

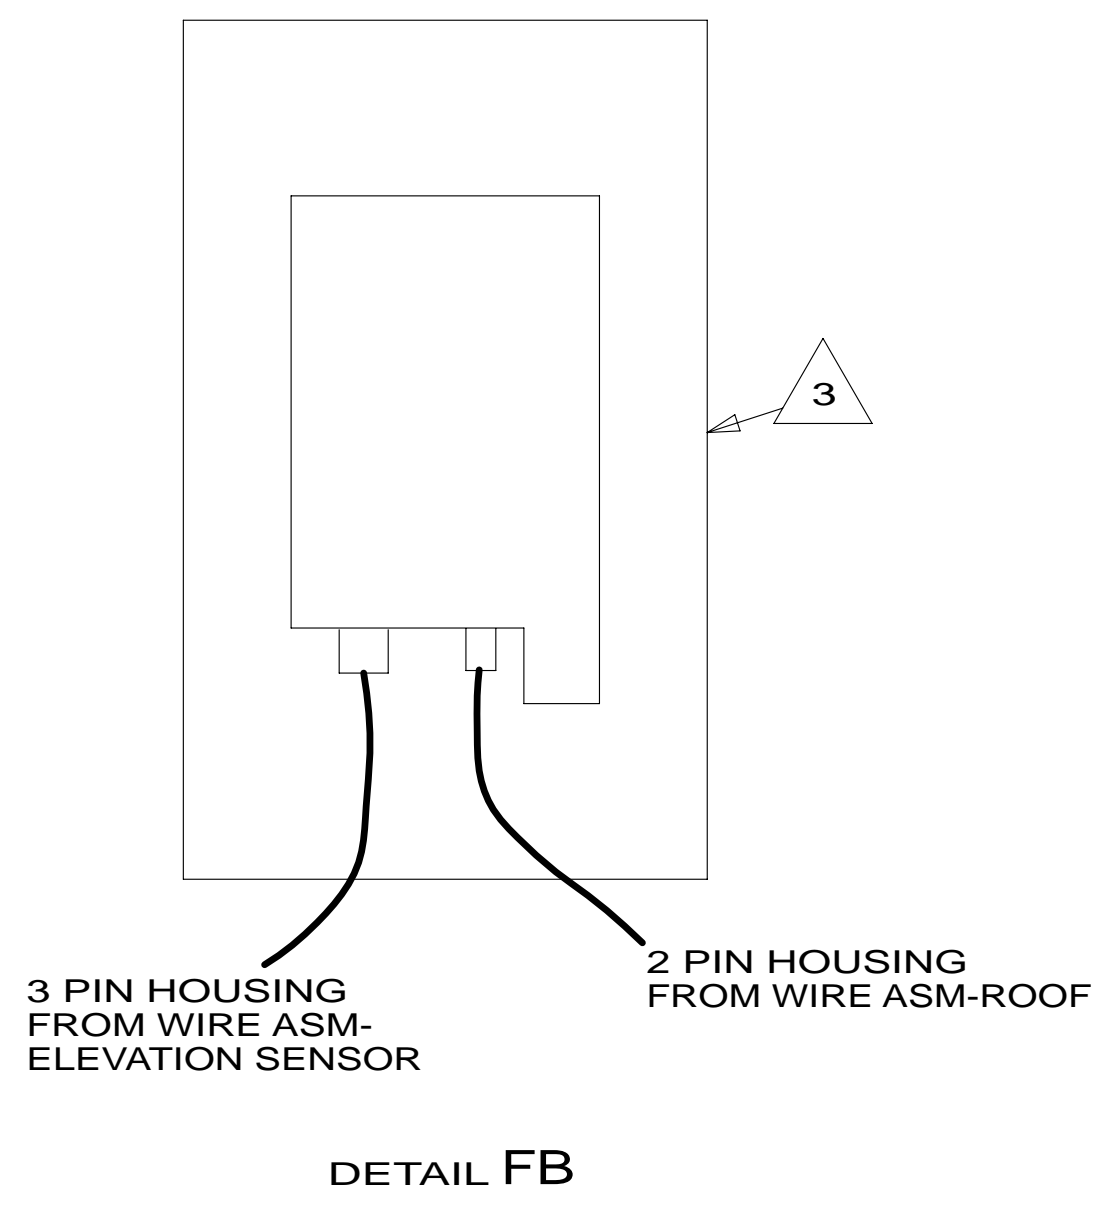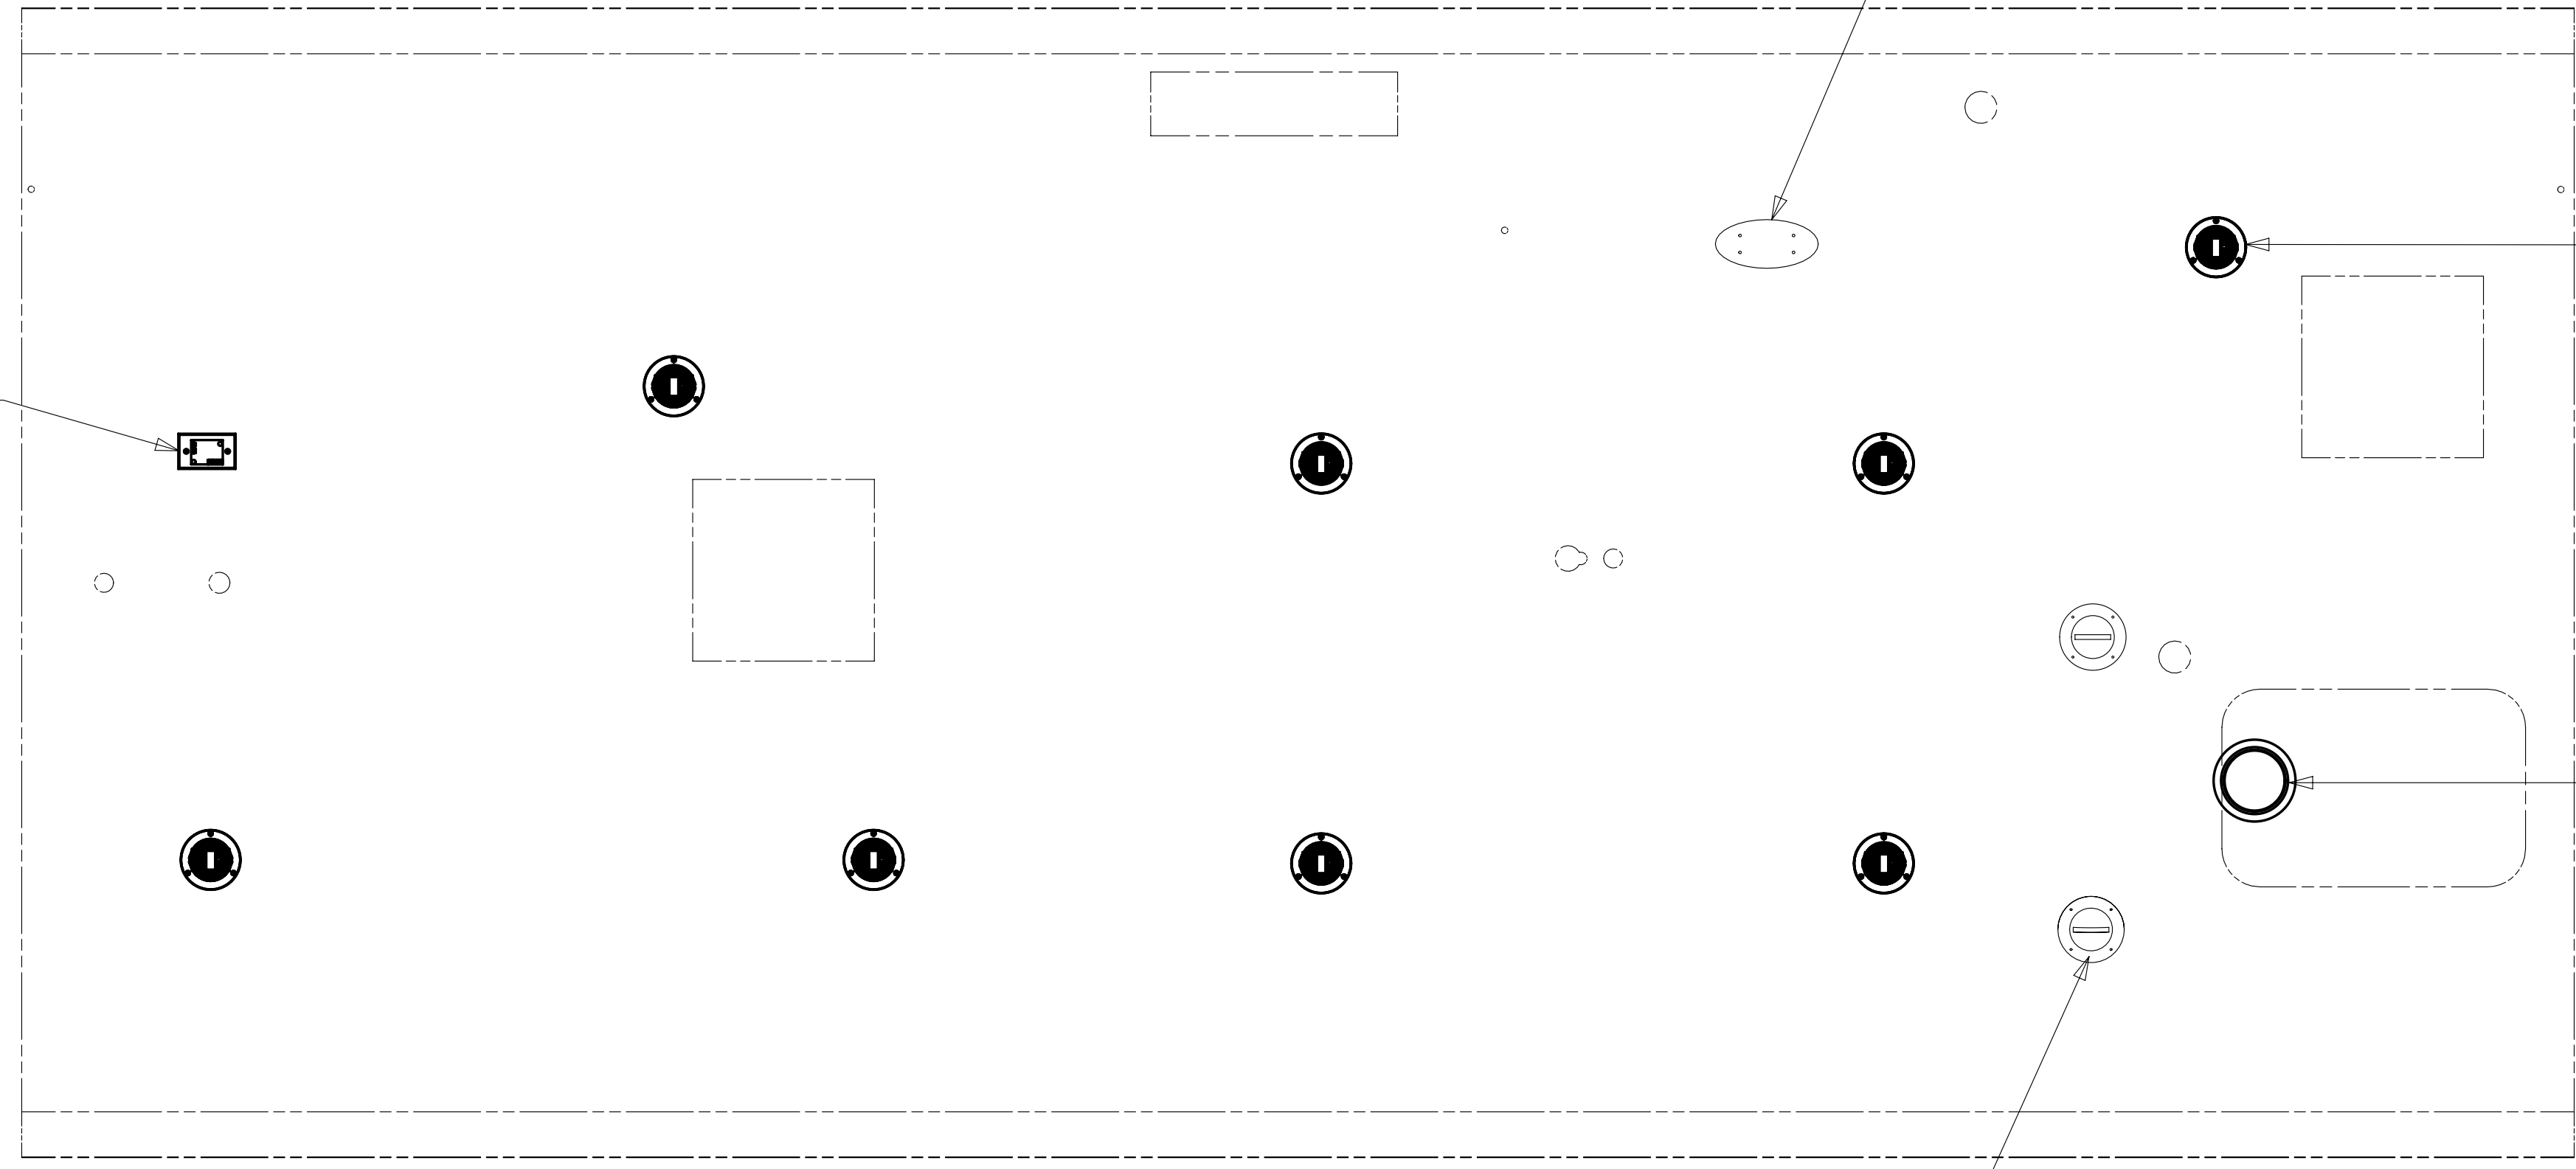

SPEAKER
160867-01-CHT (2)
SCREW
OG1208-12-170 (8)

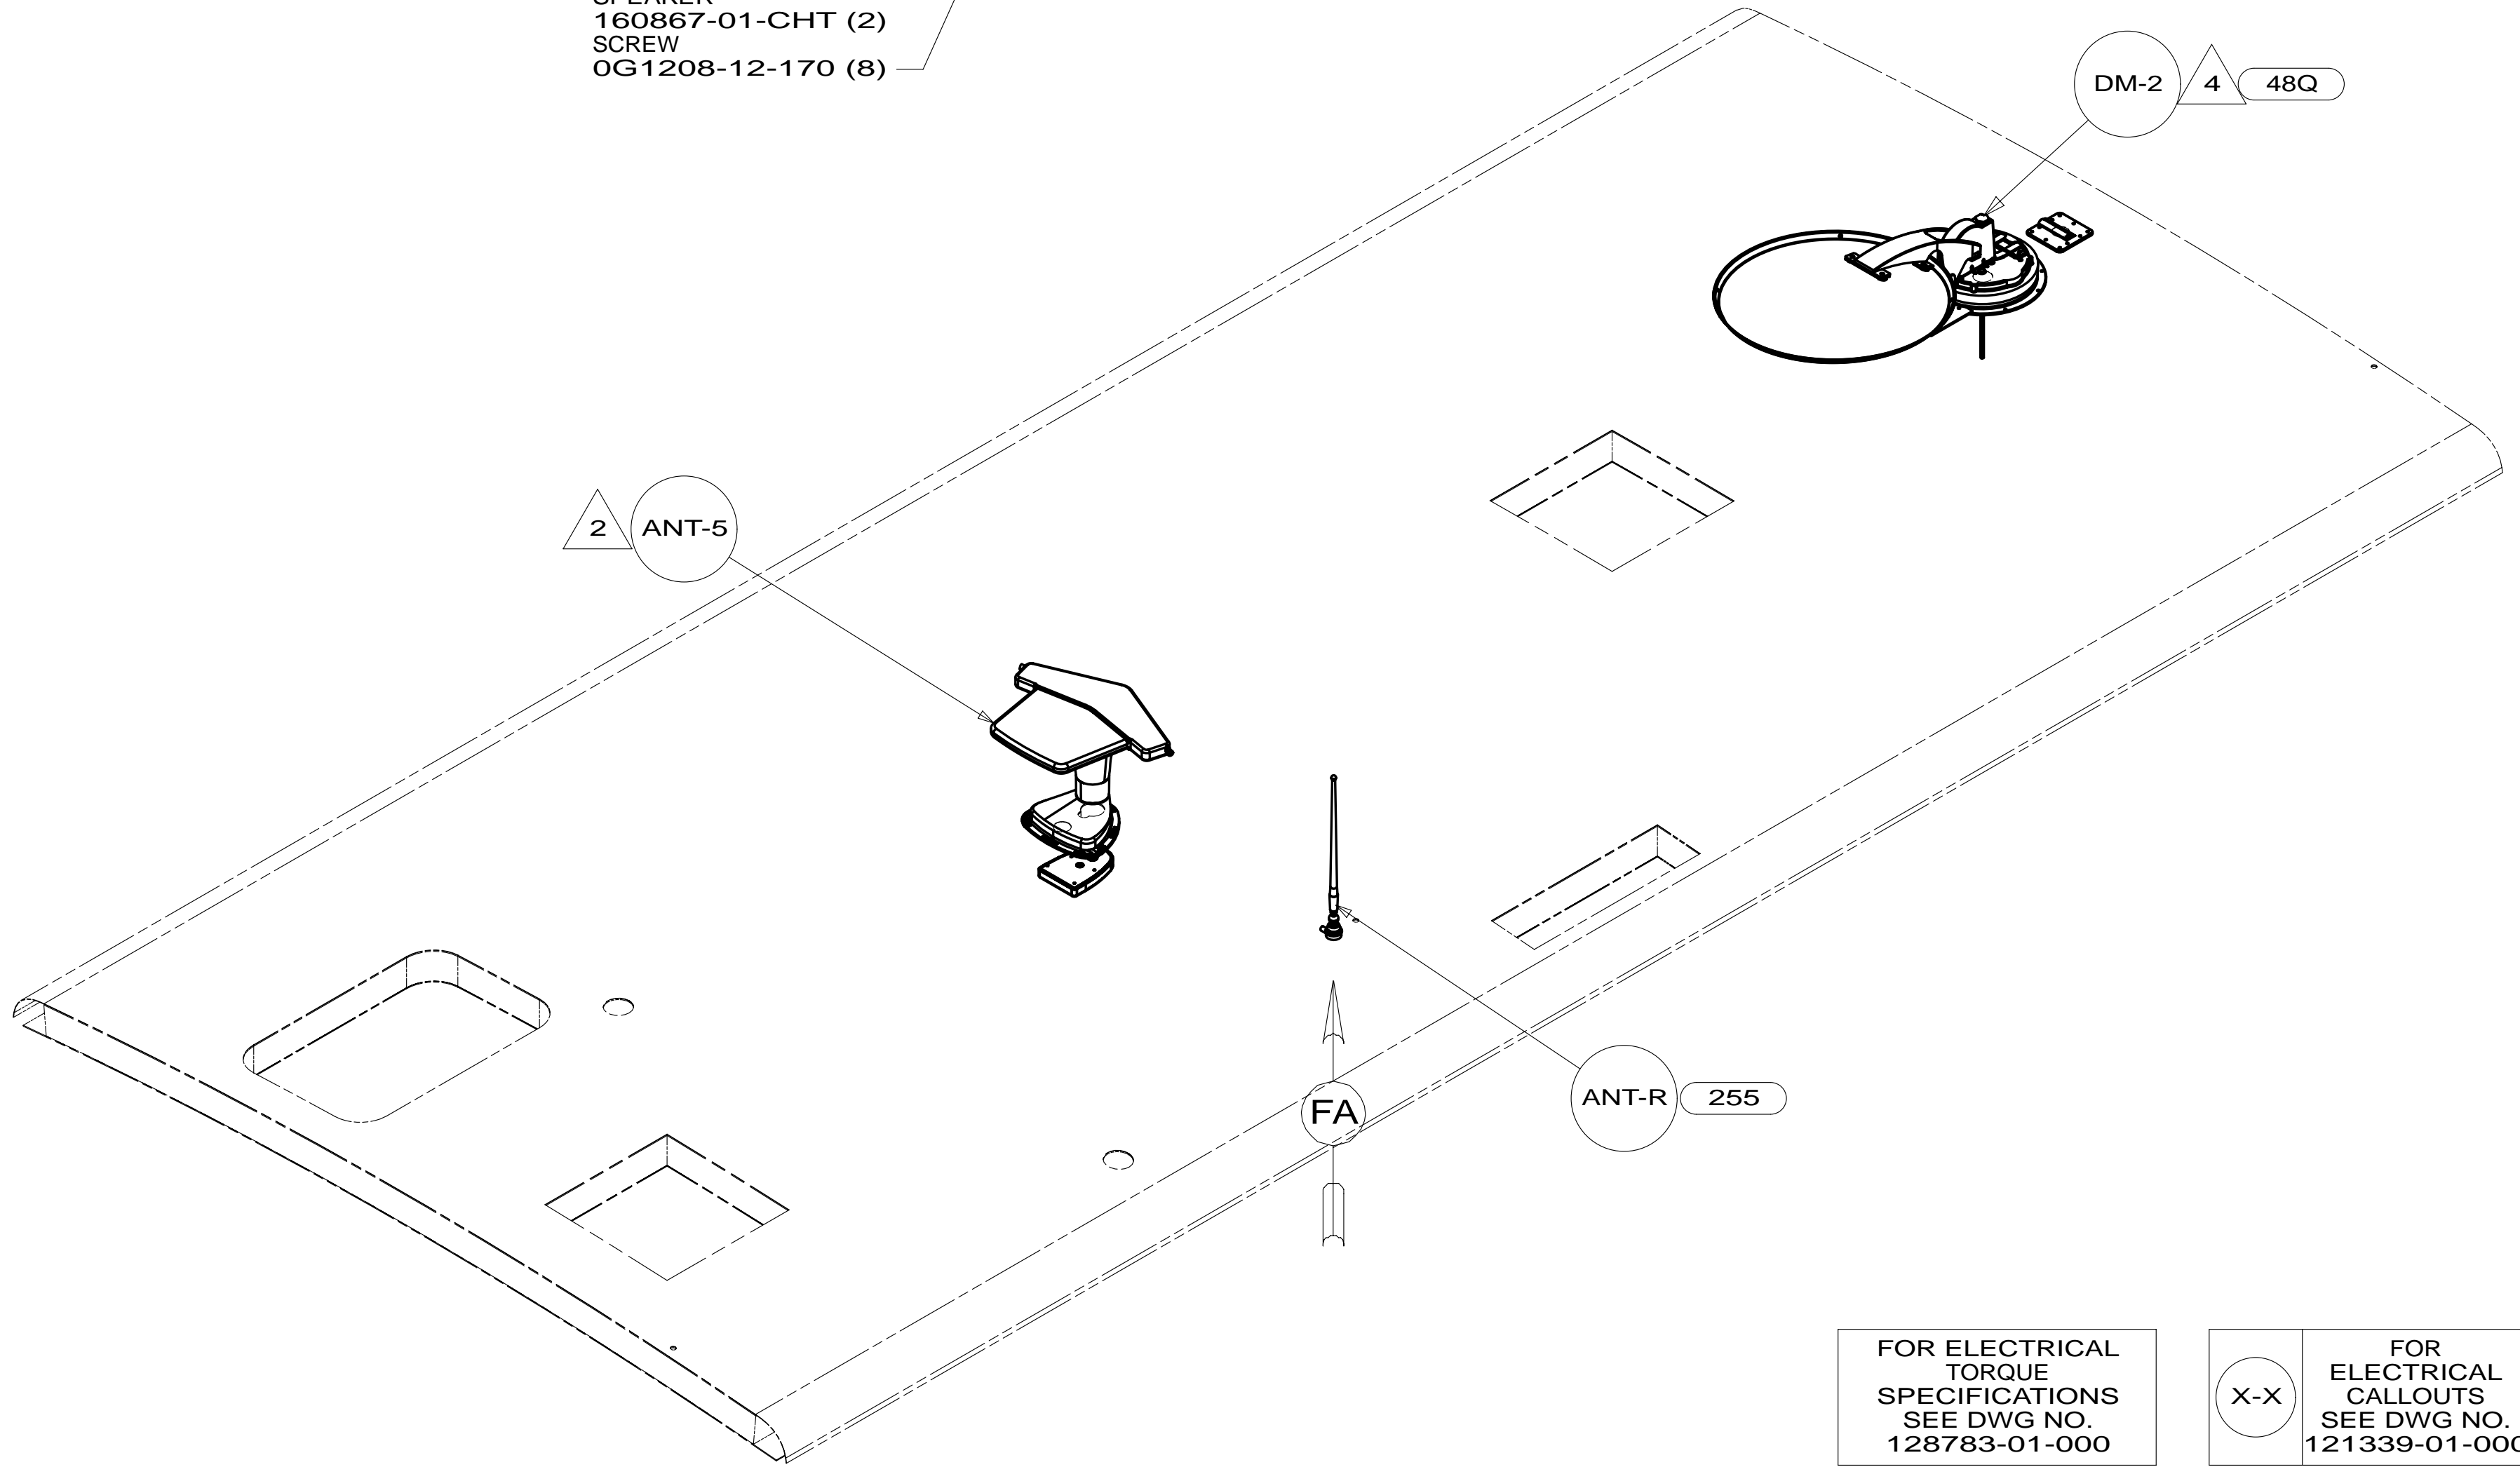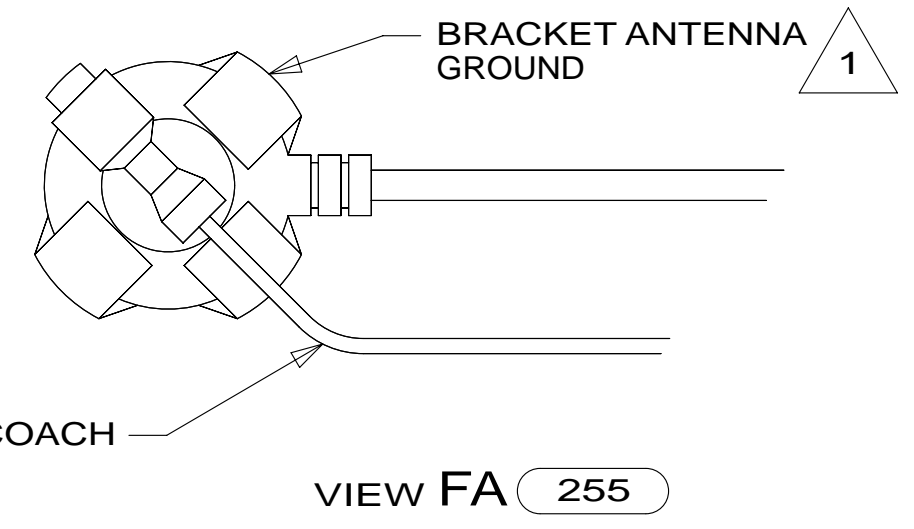

- NOTES:
- 4 REMOVE ALL SHIPPING RESTRAINTS AND FIRMLY INSERT THE SUPPLIED PLUGS INTO THE APPROPRIATE SIZED HOLES AS SPECIFIED IN THE INSTALLATION PROCESS.
 - 3 SENSOR SUPPLIED WITH SATELLITE ASSEMBLY.
 - 2 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.
 - 1 WRAP BRACKET LEGS AROUND ANTENNA BASE.

- 48Q SATELLITE TV SYSTEM MANUAL
- 255 RADIO/AM/FM/CD/DVD, COACH
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED	13 H25R	
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 12V		
SHEET 6	PART NO 182565	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

* 182565 *