



DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

DRAWING NO.	MODEL
182740-01	H25P
182740-02	H25Q/H25T
182740-03	---

RELEASE	REV/DATE A	DWG NO 182740
REV ZONE	REVISION RECORD	DATE DFR-ORIG

		H25P	H25Q/H25T	
CABLE ASM-STARTER (RED)		141415-37-013	141415-37-013	3
CABLE ASM-COACH BATTERY (YEL)		141415-52-073	141415-52-050	
CABLE ASM-COACH BATTERY GND (BLK)		133567-12-009	133567-12-009	
CABLE ASM-GENERATOR (GRN)	33F	141416-42-070	141416-42-070	3
CABLE ASM-GENERATOR GND (BLK)	33F	133567-12-006	133567-12-006	3
CABLE ASM-GENERATOR (GRN)	52G	141415-42-075	141415-42-075	3
CABLE ASM-GENERATOR GND (BLK)	52G	133566-12-017	133566-12-017	3
CABLE ASM-INVERTER FUSE (ORG)		141415-62-003	141415-62-003	
CABLE ASM-INVERTER GND (BLK)		133566-12-011	133566-12-011	
CABLE ASM-INVERTER (ORG)		141415-62-023	141415-62-023	

- 52G GEN-3.6KW ONAN LP MICROQUIET
- 33F GEN-3.2 KW ONAN DIESEL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO COPYRIGHT 2014 WINNEBAGO INDUSTRIES, INC.


DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	14 H-SERIES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	MATERIAL:
ONE-PLACE (X.X)	
TWO-PLACE (X.XX)	
ANGLE	
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES
TITLE: BATTERY INSTL	
SHEET 1 OF 2	PART NO 182740 REV

- 3 ROUTING OF CABLE SHOWN ON WIRING INSTL-CHASSIS ONLY.
2. BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.
1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION FOR ROUTING CABLES.
- NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

* 182740 * * A

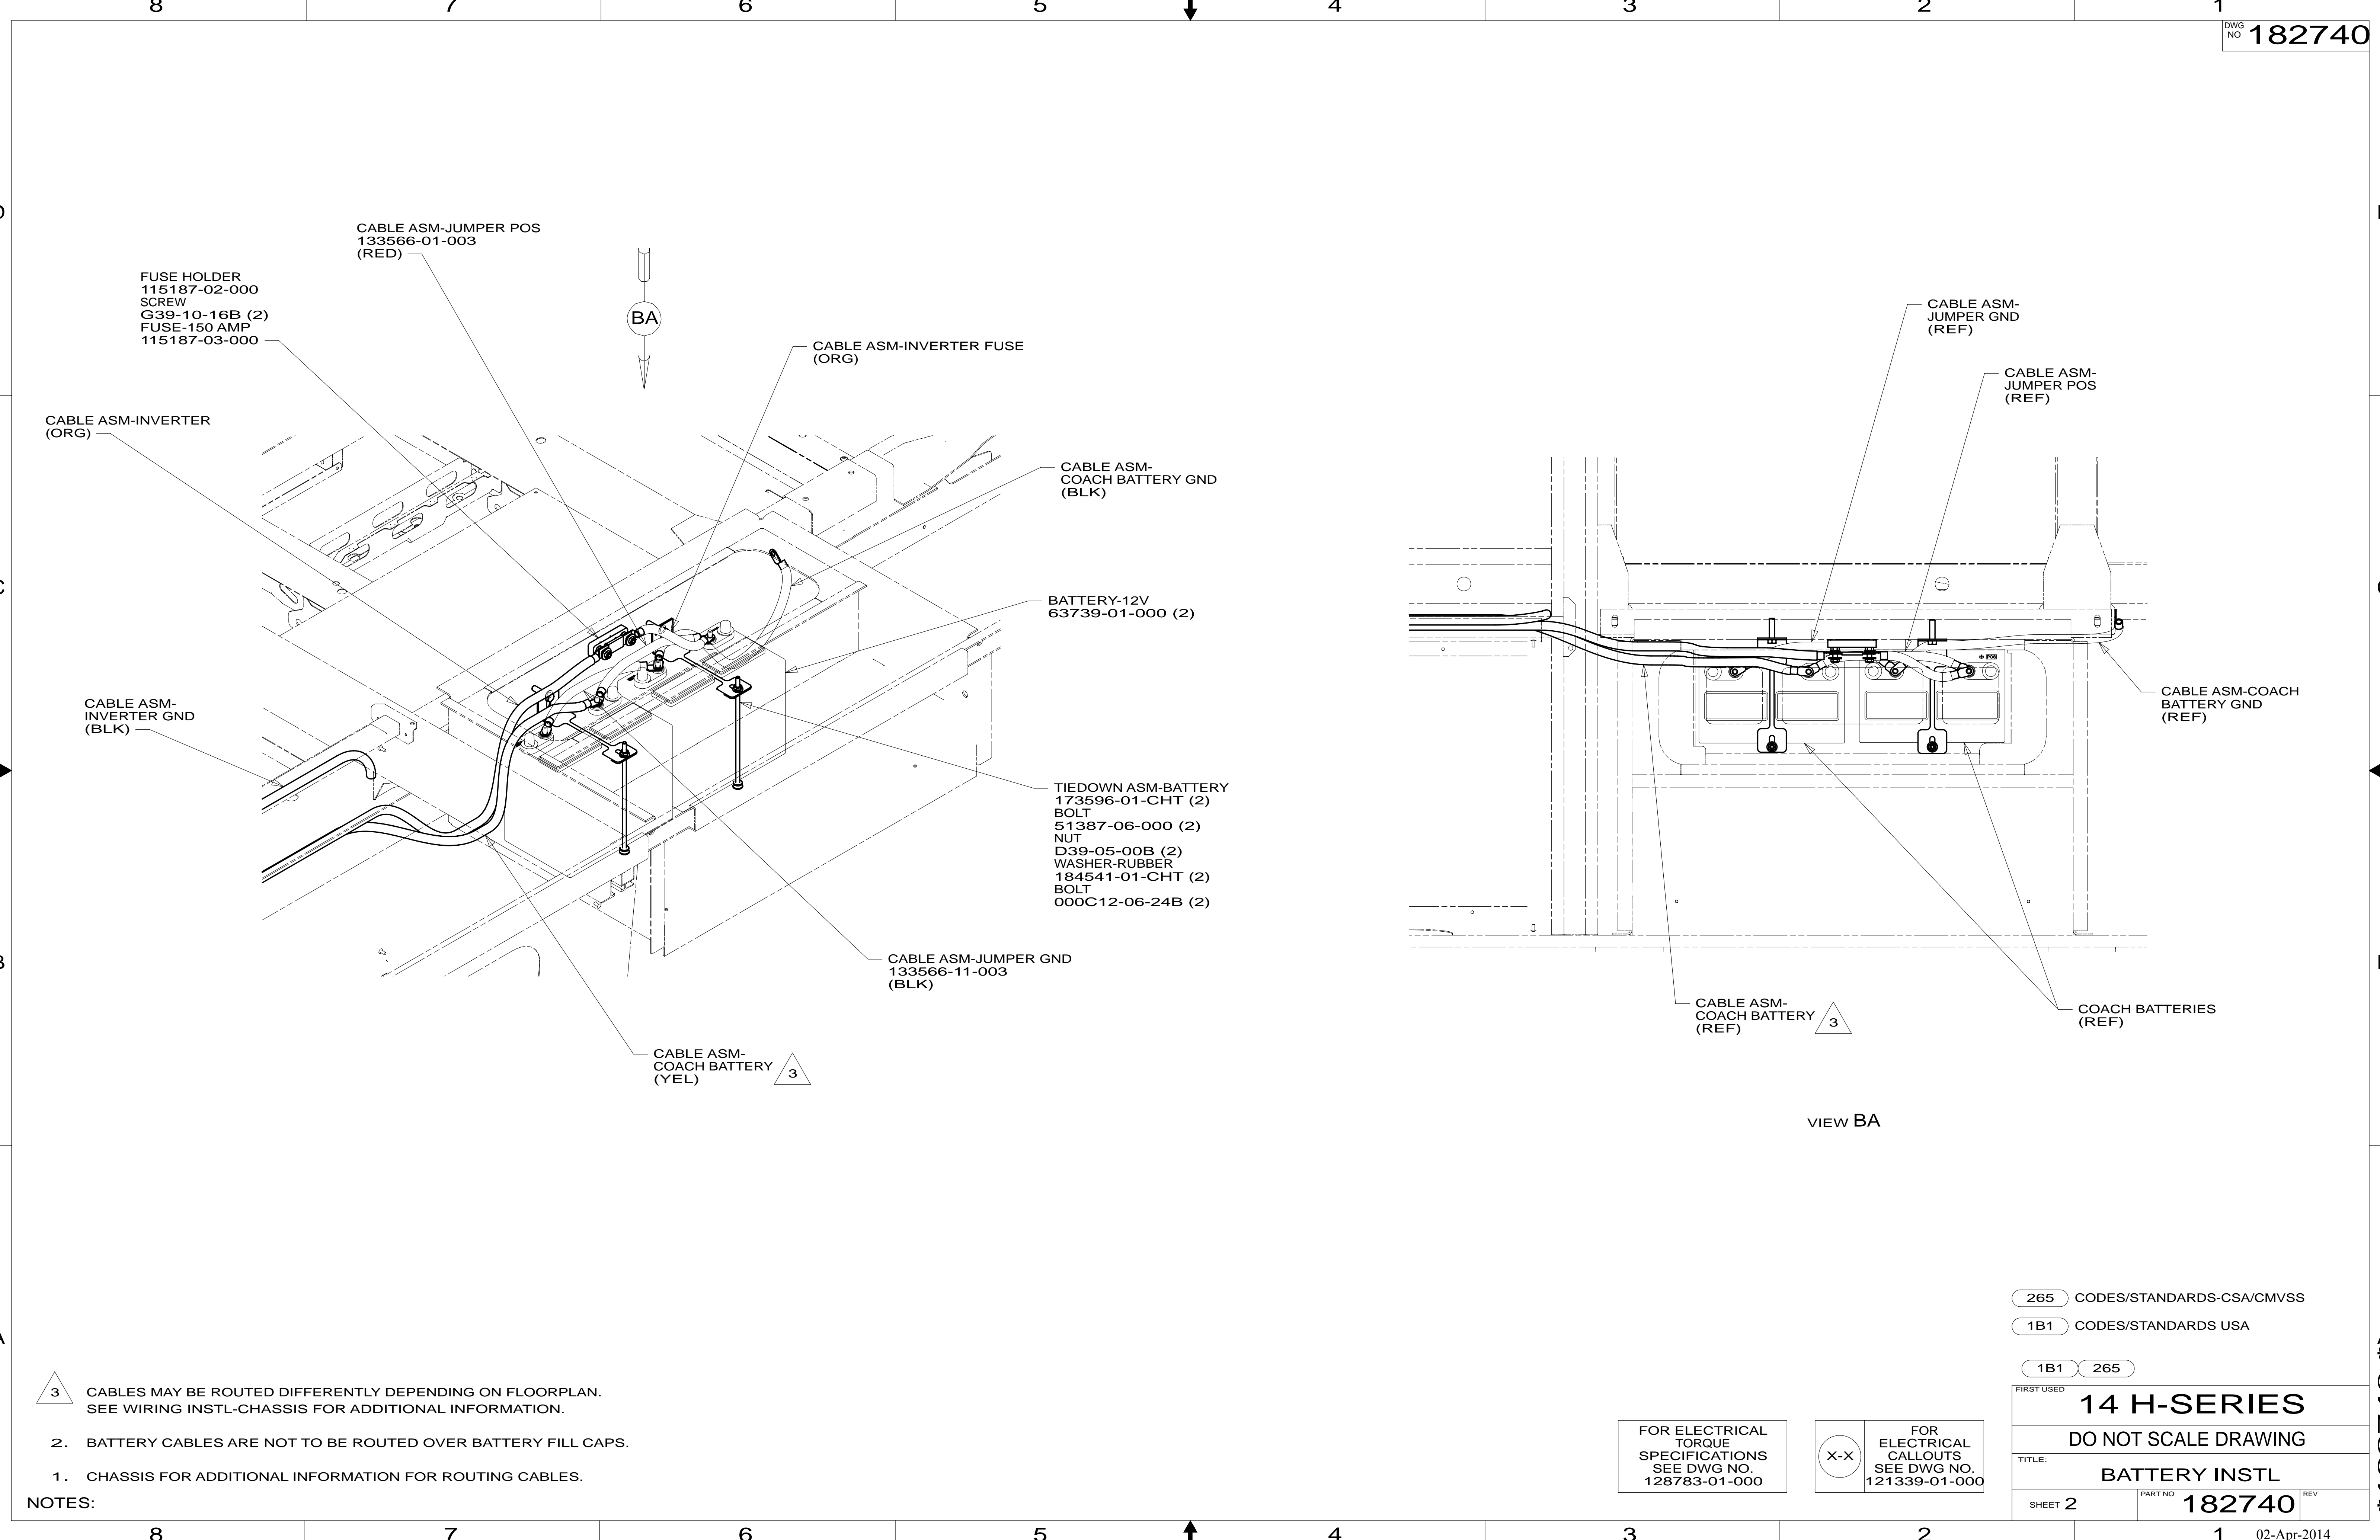

BA

VIEW BA

3 CABLES MAY BE ROUTED DIFFERENTLY DEPENDING ON FLOORPLAN. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

- 2. BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.
- 1. CHASSIS FOR ADDITIONAL INFORMATION FOR ROUTING CABLES.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED **14 H-SERIES**

DO NOT SCALE DRAWING

TITLE: **BATTERY INSTL**

SHEET 2 PART NO **182740** REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

* 182740 * A