





**DANGER**

**Danger of electrical shock, burns or death.** Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



**CAUTION**

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

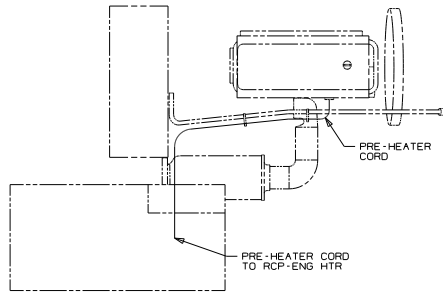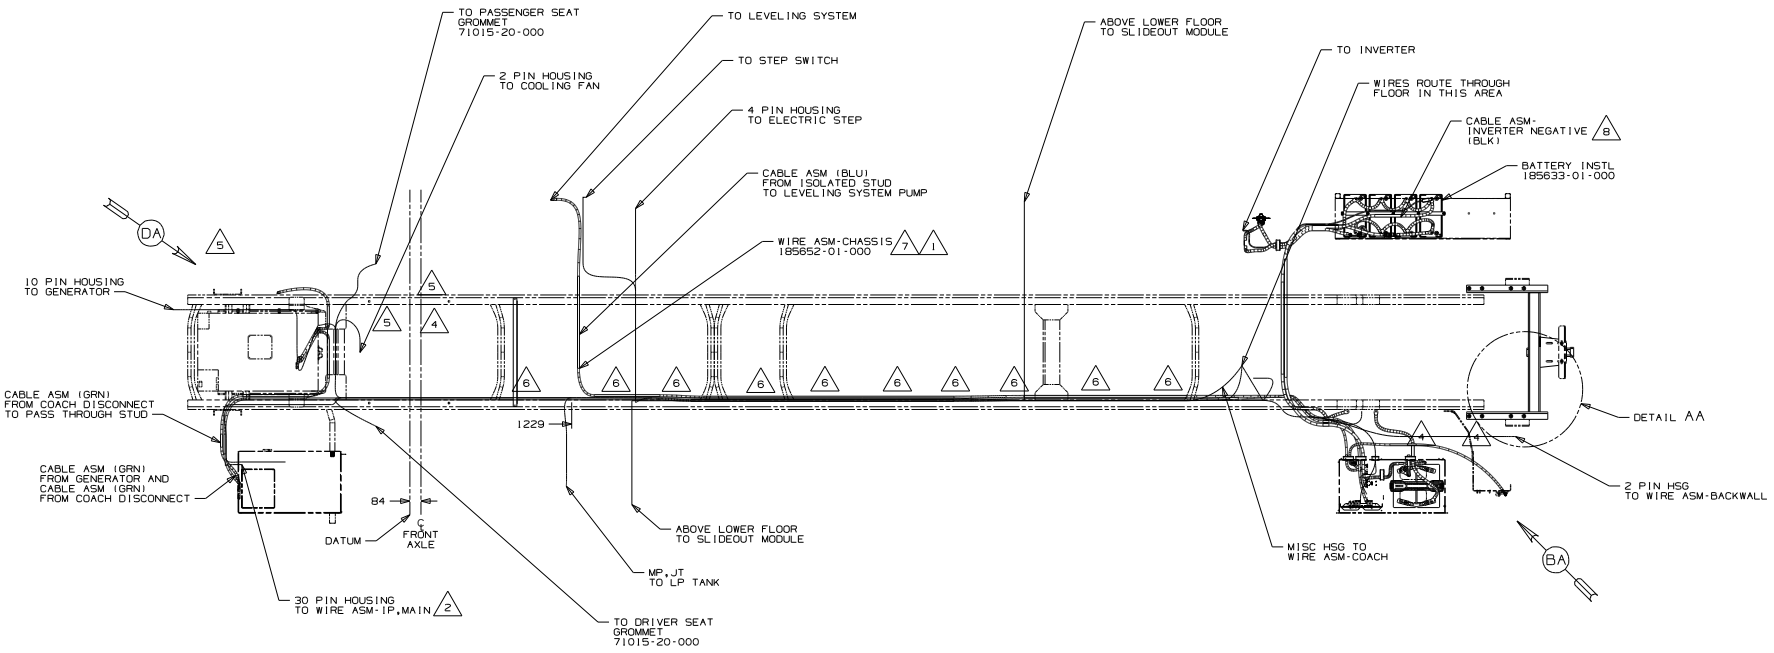

- NOTES:
- 7 REST WIRE IN FRAME RAIL WHEN APPLICABLE.
  - 6 CLAMP B3610-01-000, SCREW G39-08-12B
  - 5 CLAMP 10497-03-000, SCREW G39-08-12B
  - 4 USE TIE-WIRE B343-04-000 TO SECURE WIRES TO FLOOR SUPPORT FRAME AT LEAST ONCE EVERY 600MM.
  - 3 SECURE CORD AWAY FROM ALL MOVING PARTS AND EXHAUST WITH WIRE-TIE 93147-01-000 AS REQUIRED
  - 2 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
  - 1 SAME LOOM USED ON BOTH R40FD & R40KD.


265 CODES/STANDARDS-CSA/CMVSS  
 181 CODES/STANDARDS USA  
 181 265

<b>WINNEBAGO</b> INDUSTRIES, INC.		COPYRIGHT 2014 WINNEBAGO INDUSTRIES, INC.	
DTR	ORIG. DATE	MATERIAL	
CHR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
W.E.		14 L34T	
DWR			
UNSPECIFIED TOLERANCES ARE:			
SIZE DIM (X)			
ONE-PLACE (X,X)	1.5		
TWO-PLACE (X,X,X)	0.50		
ANGLE	1°		
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING		REFER TO 550016 FOR FASTENER TIGHTENING GUIDELINES	
TITLE: WIRING INSTL-CHASSIS			
SHEET 1 OF 4		PART NO 185632	
REF: 1			

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

(X-X) FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DETAIL AA 3

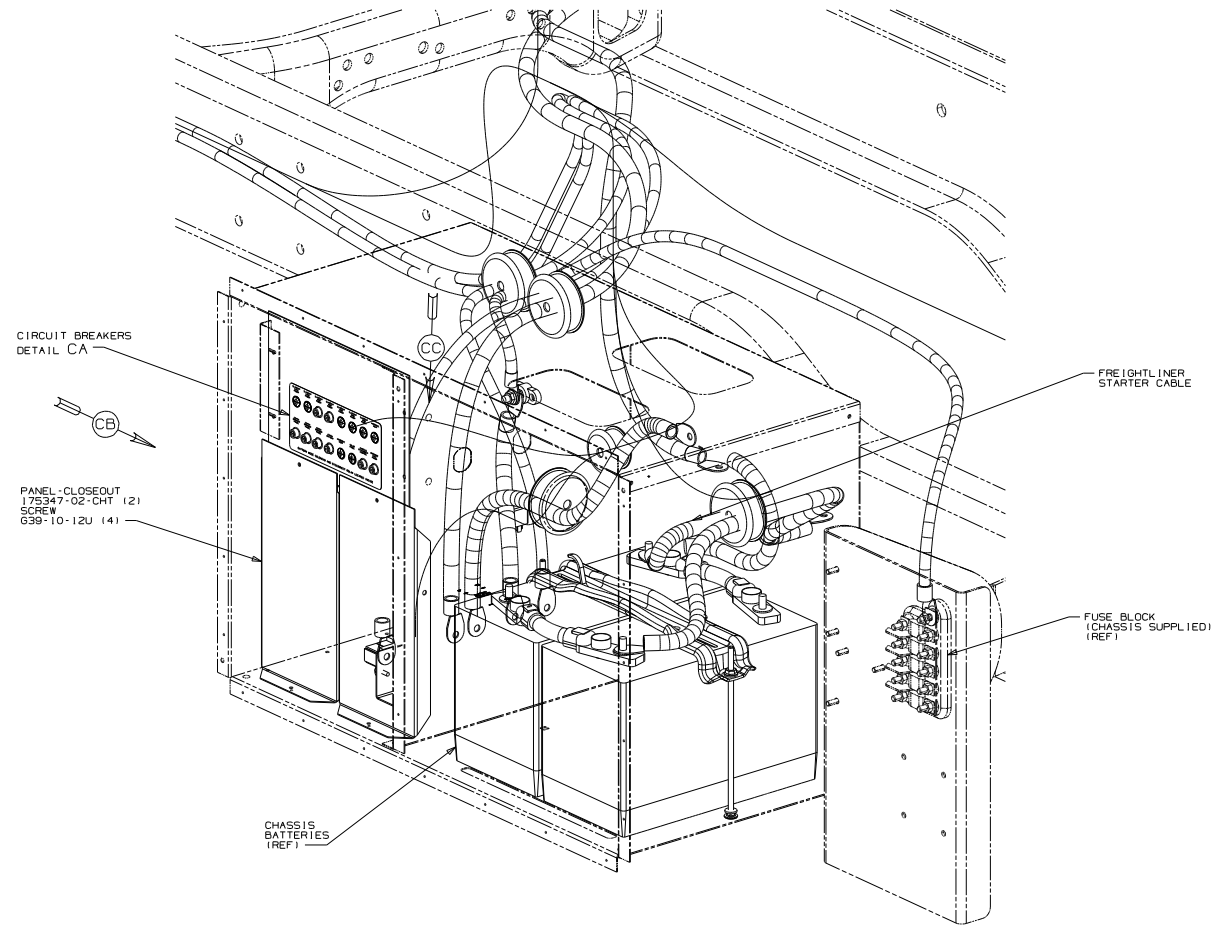

VIEW BA

265 CODES/STANDARDS-CSA/CMVSS  
 181 CODES/STANDARDS USA

181 265

PART NOS		14 L34T	
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-CHASSIS			
SHEET 2	PART NO	185632	REV





FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000



8 7 6 5 4 3 2 1

D C B A

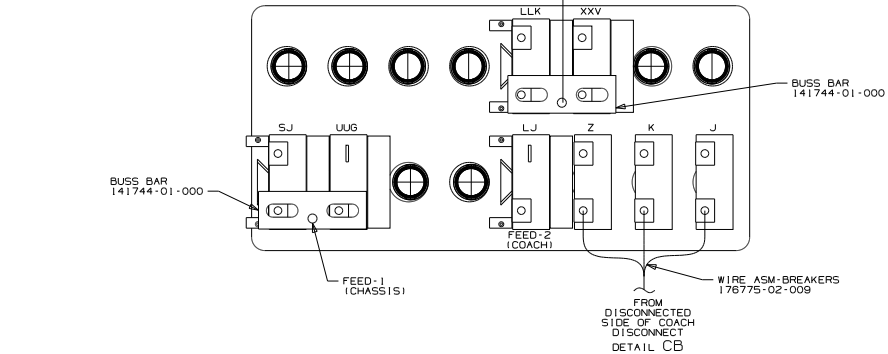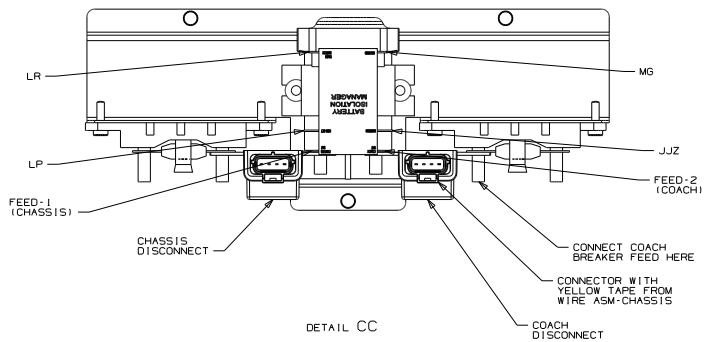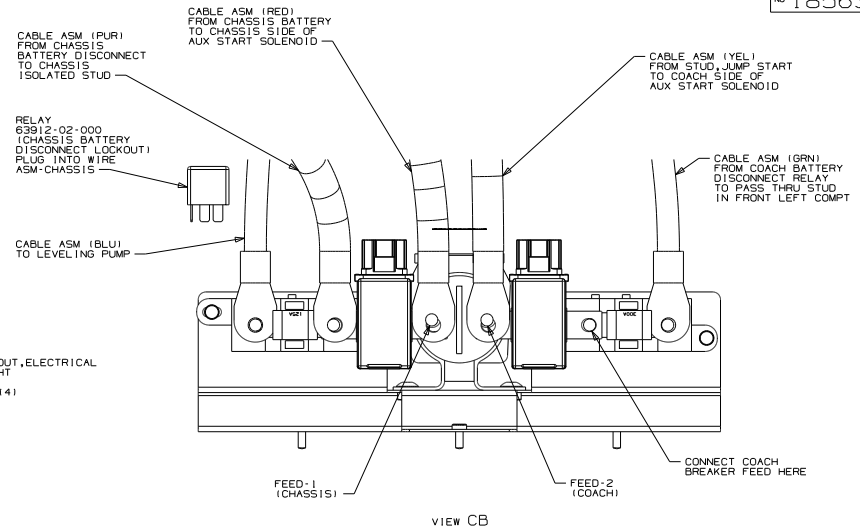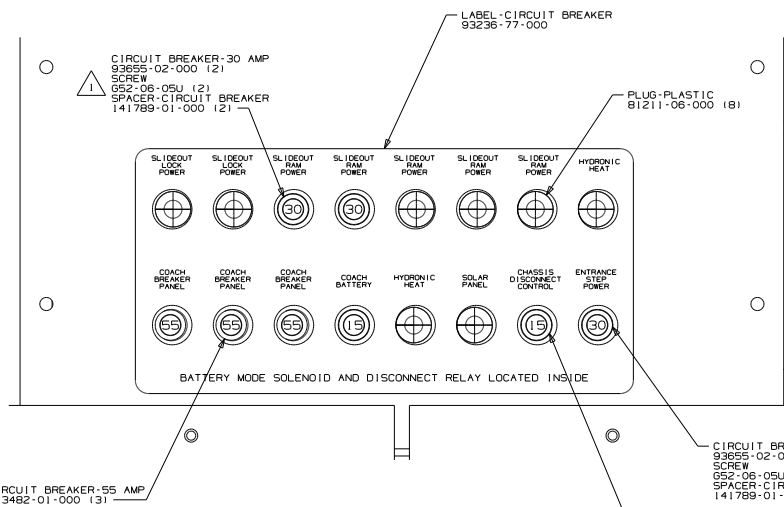


1 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.

265	CODES/STANDARDS-CSA/CMVSS
181	CODES/STANDARDS USA
181	265

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

PART USED		14 L34T	
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-CHASSIS			
SHEET 3	PART NO	185632	REV

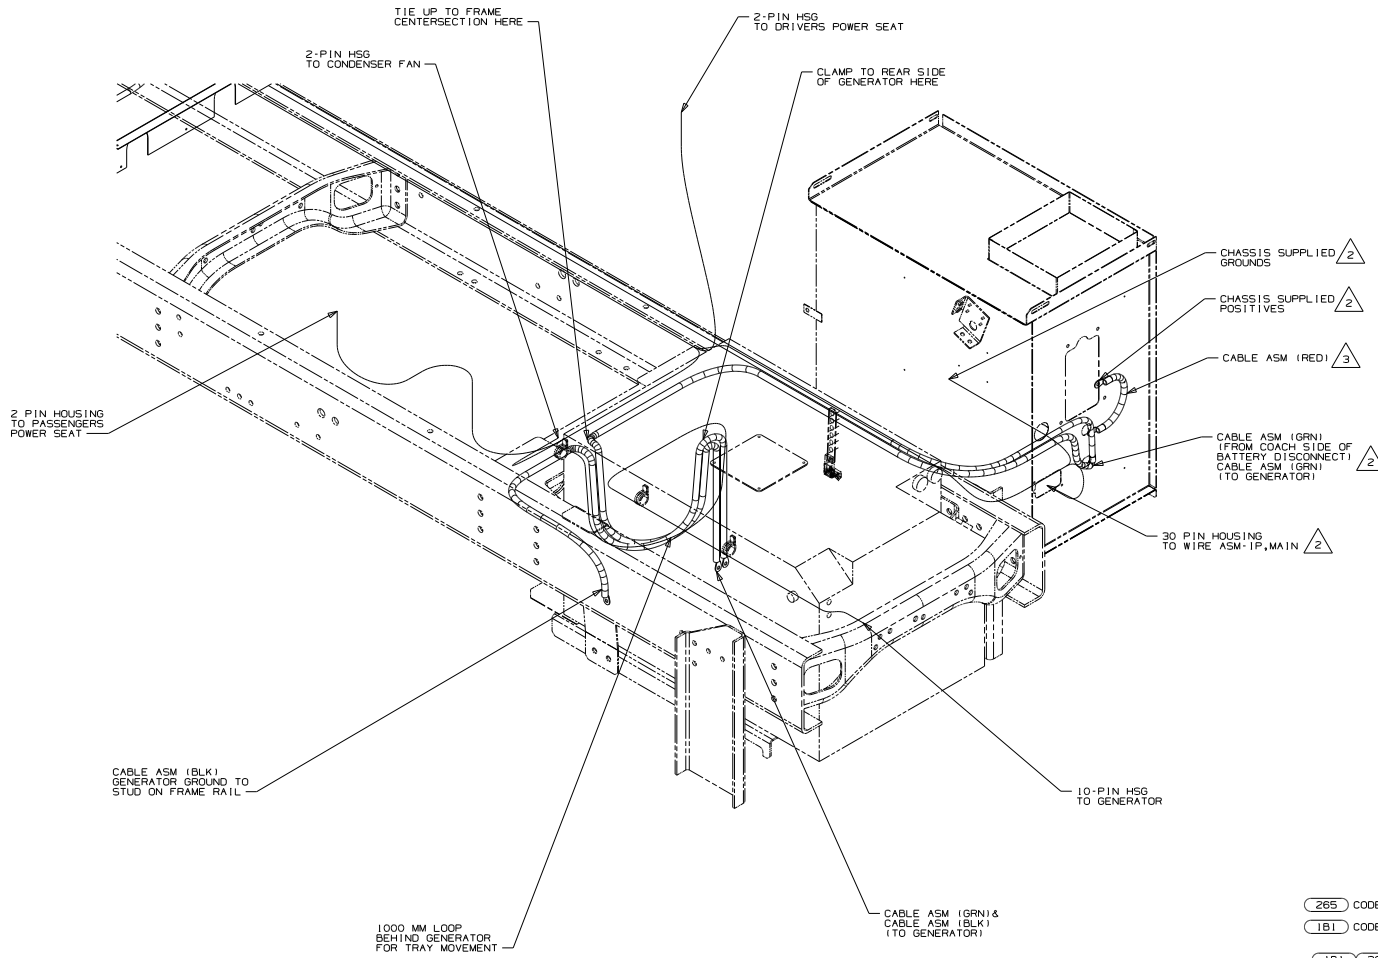

VIEW DA

2 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.

1 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

181 CODES/STANDARDS USA

181 265

PART NO		14 L34T	
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-CHASSIS			
SHEET 4	PART NO	185632	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000