



**DANGER**





**Danger of electrical shock, burns or death.** Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



**CAUTION**

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.



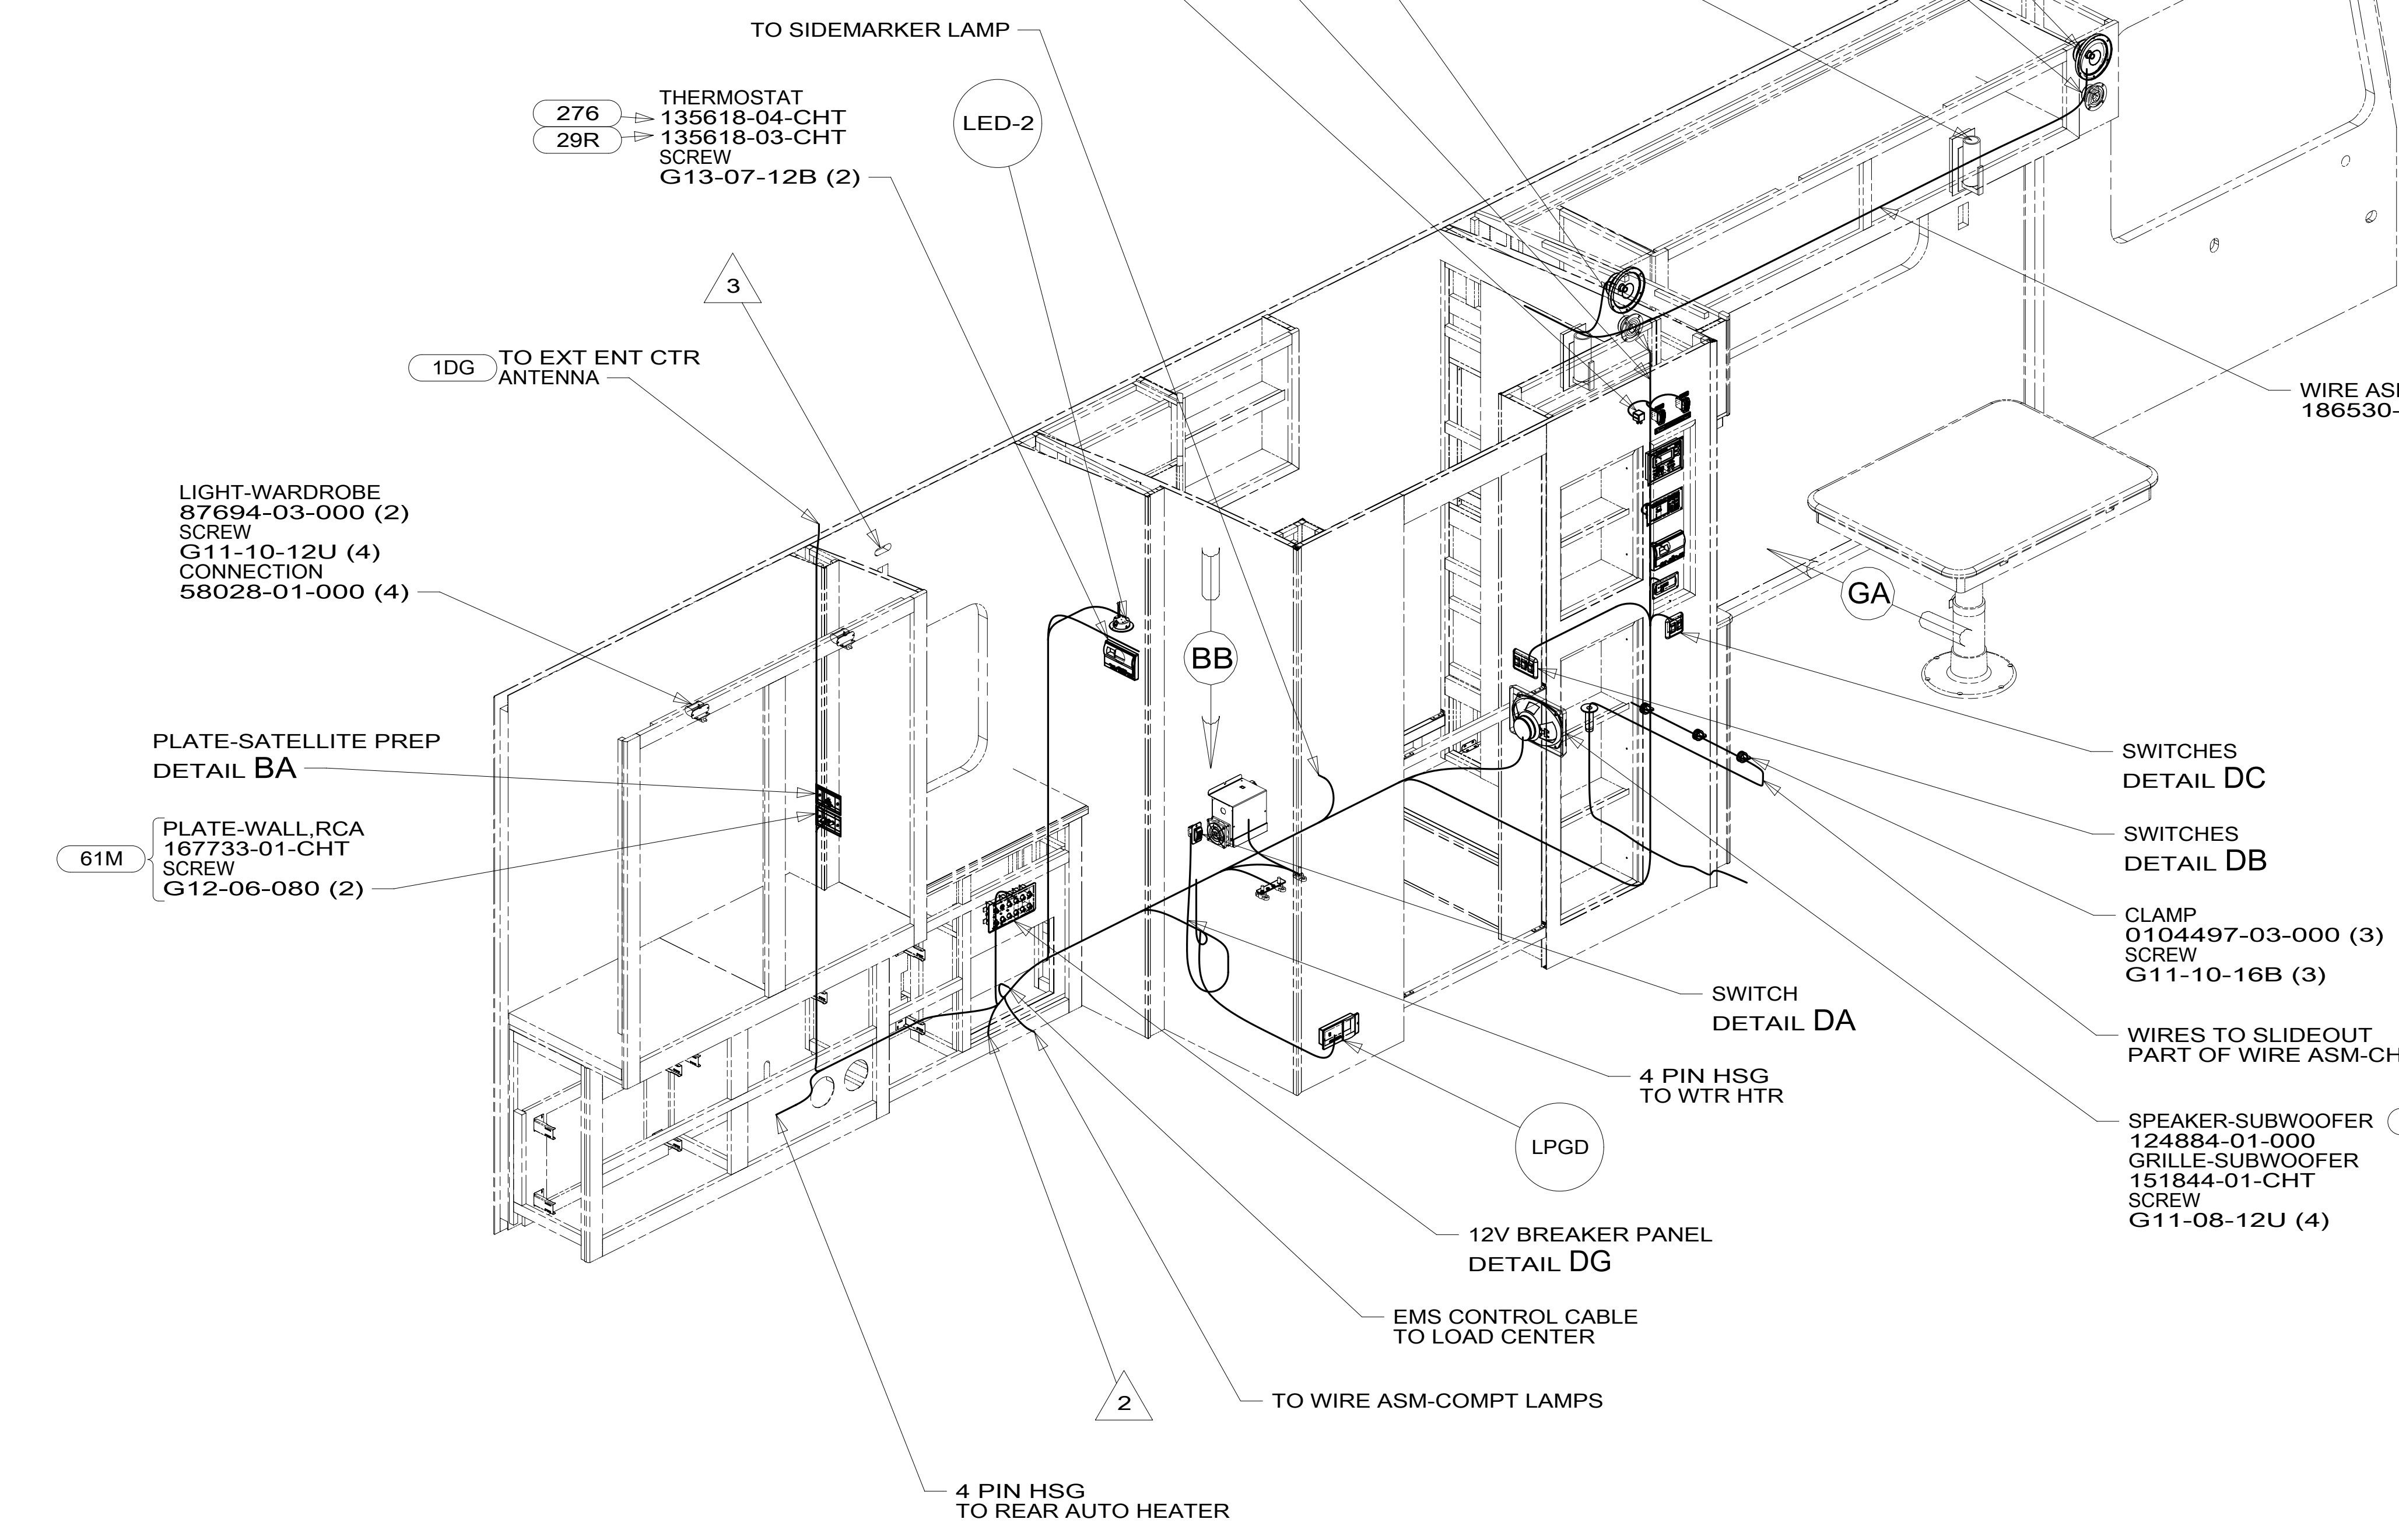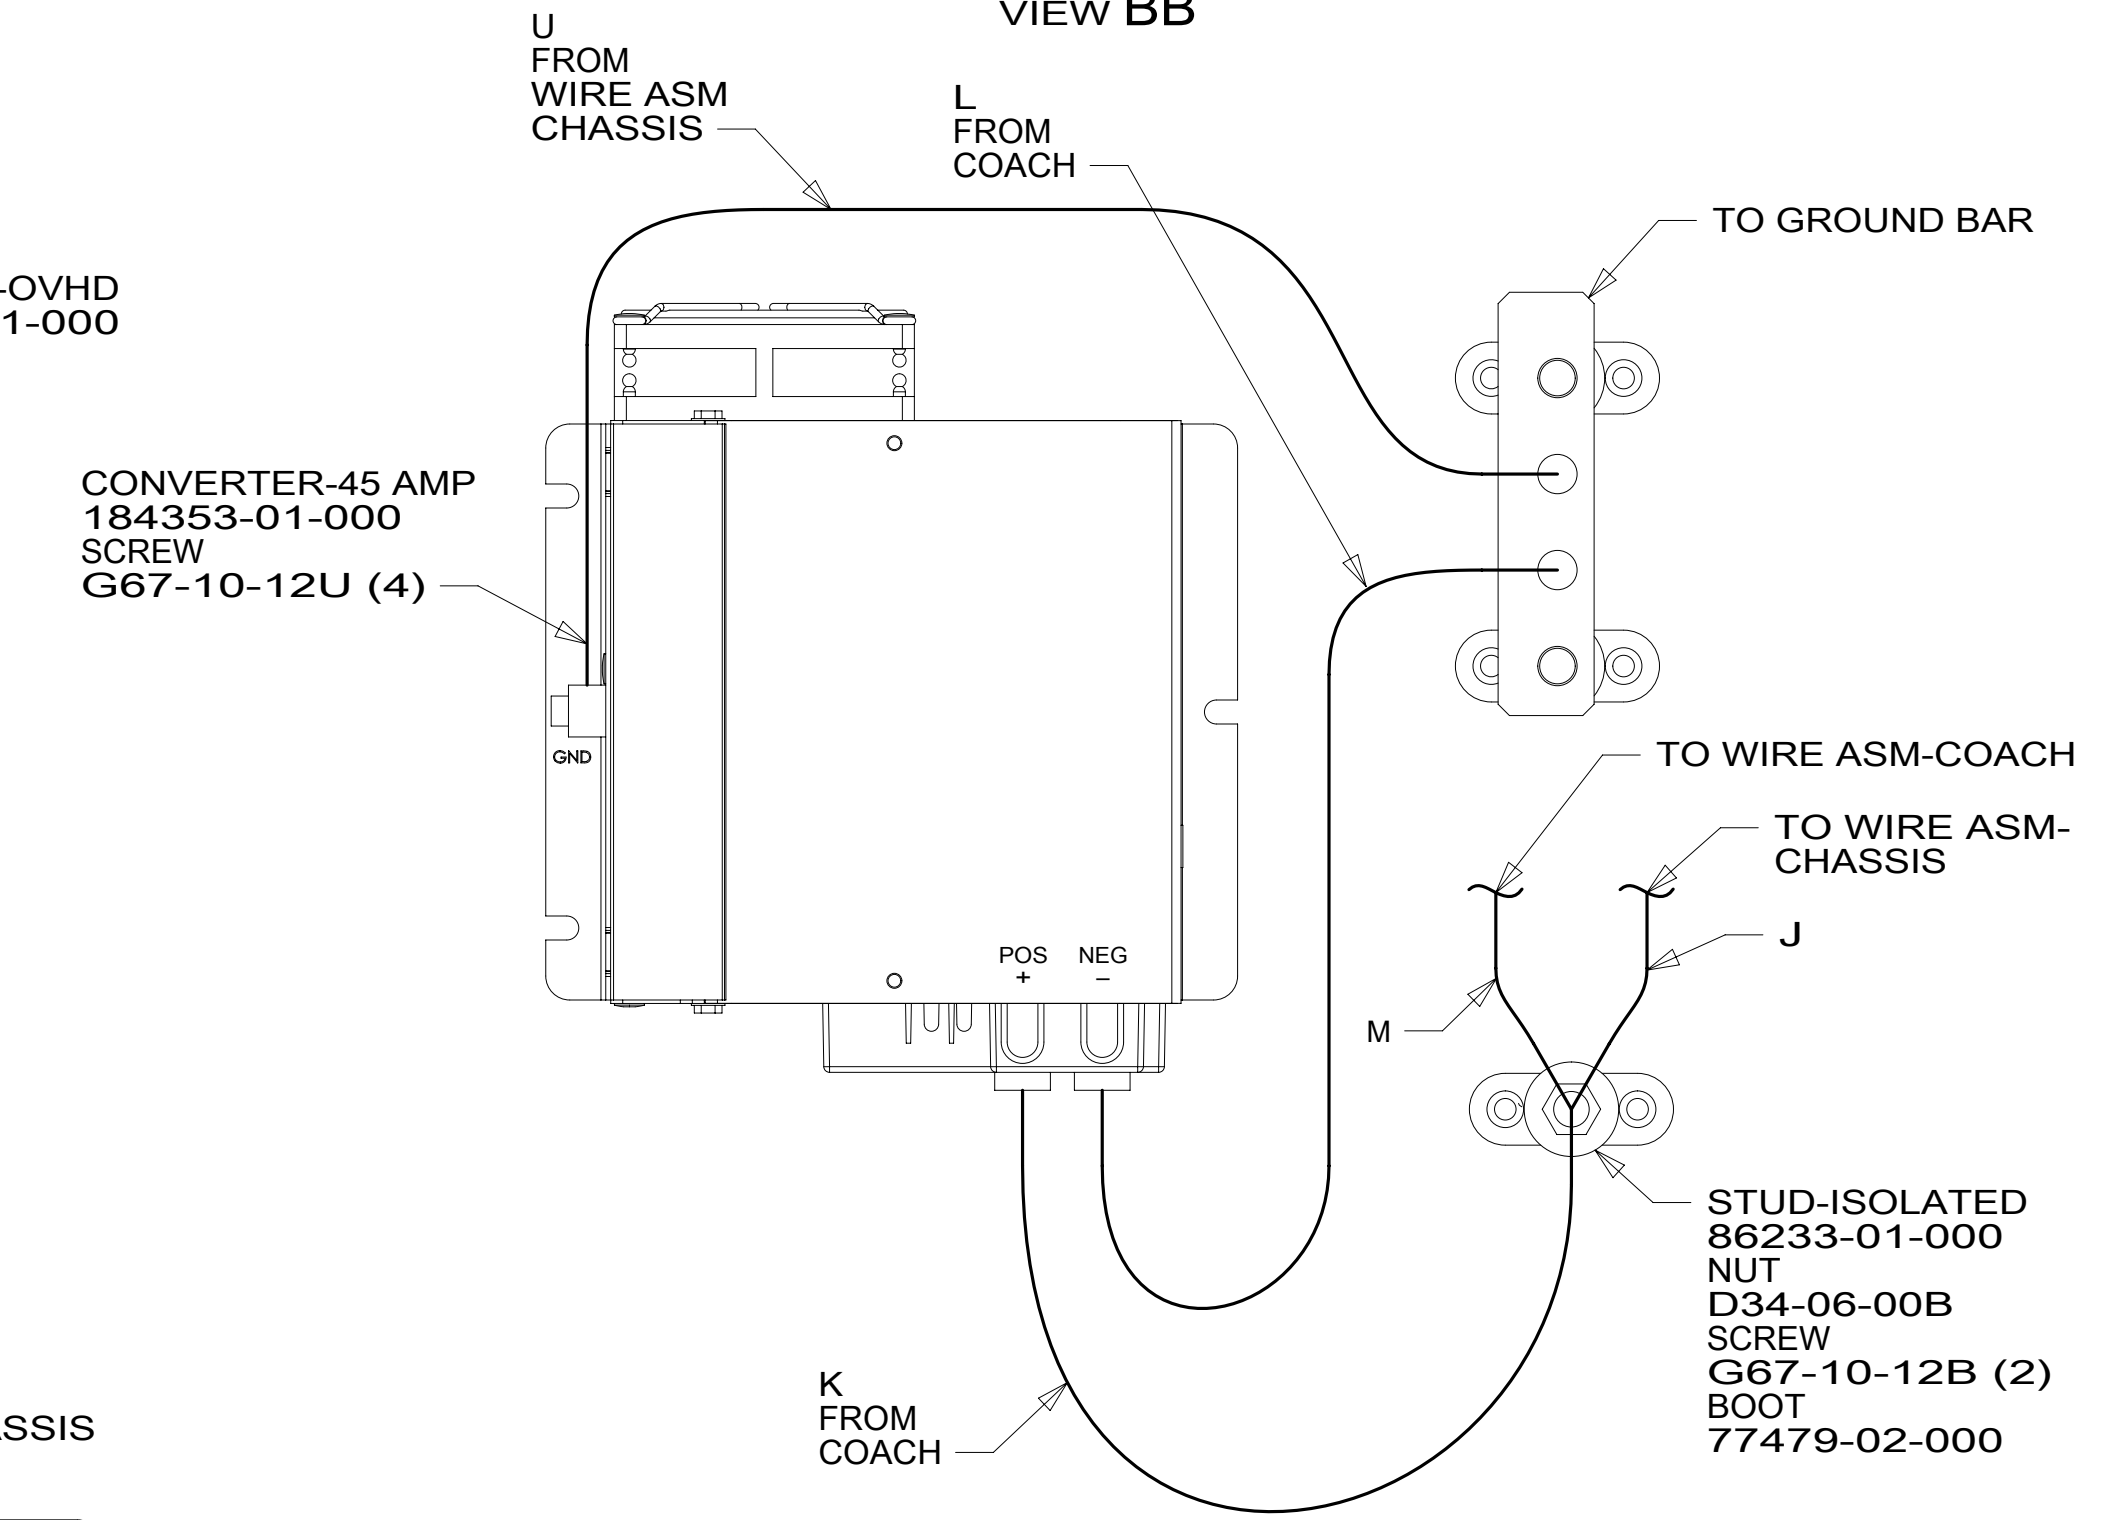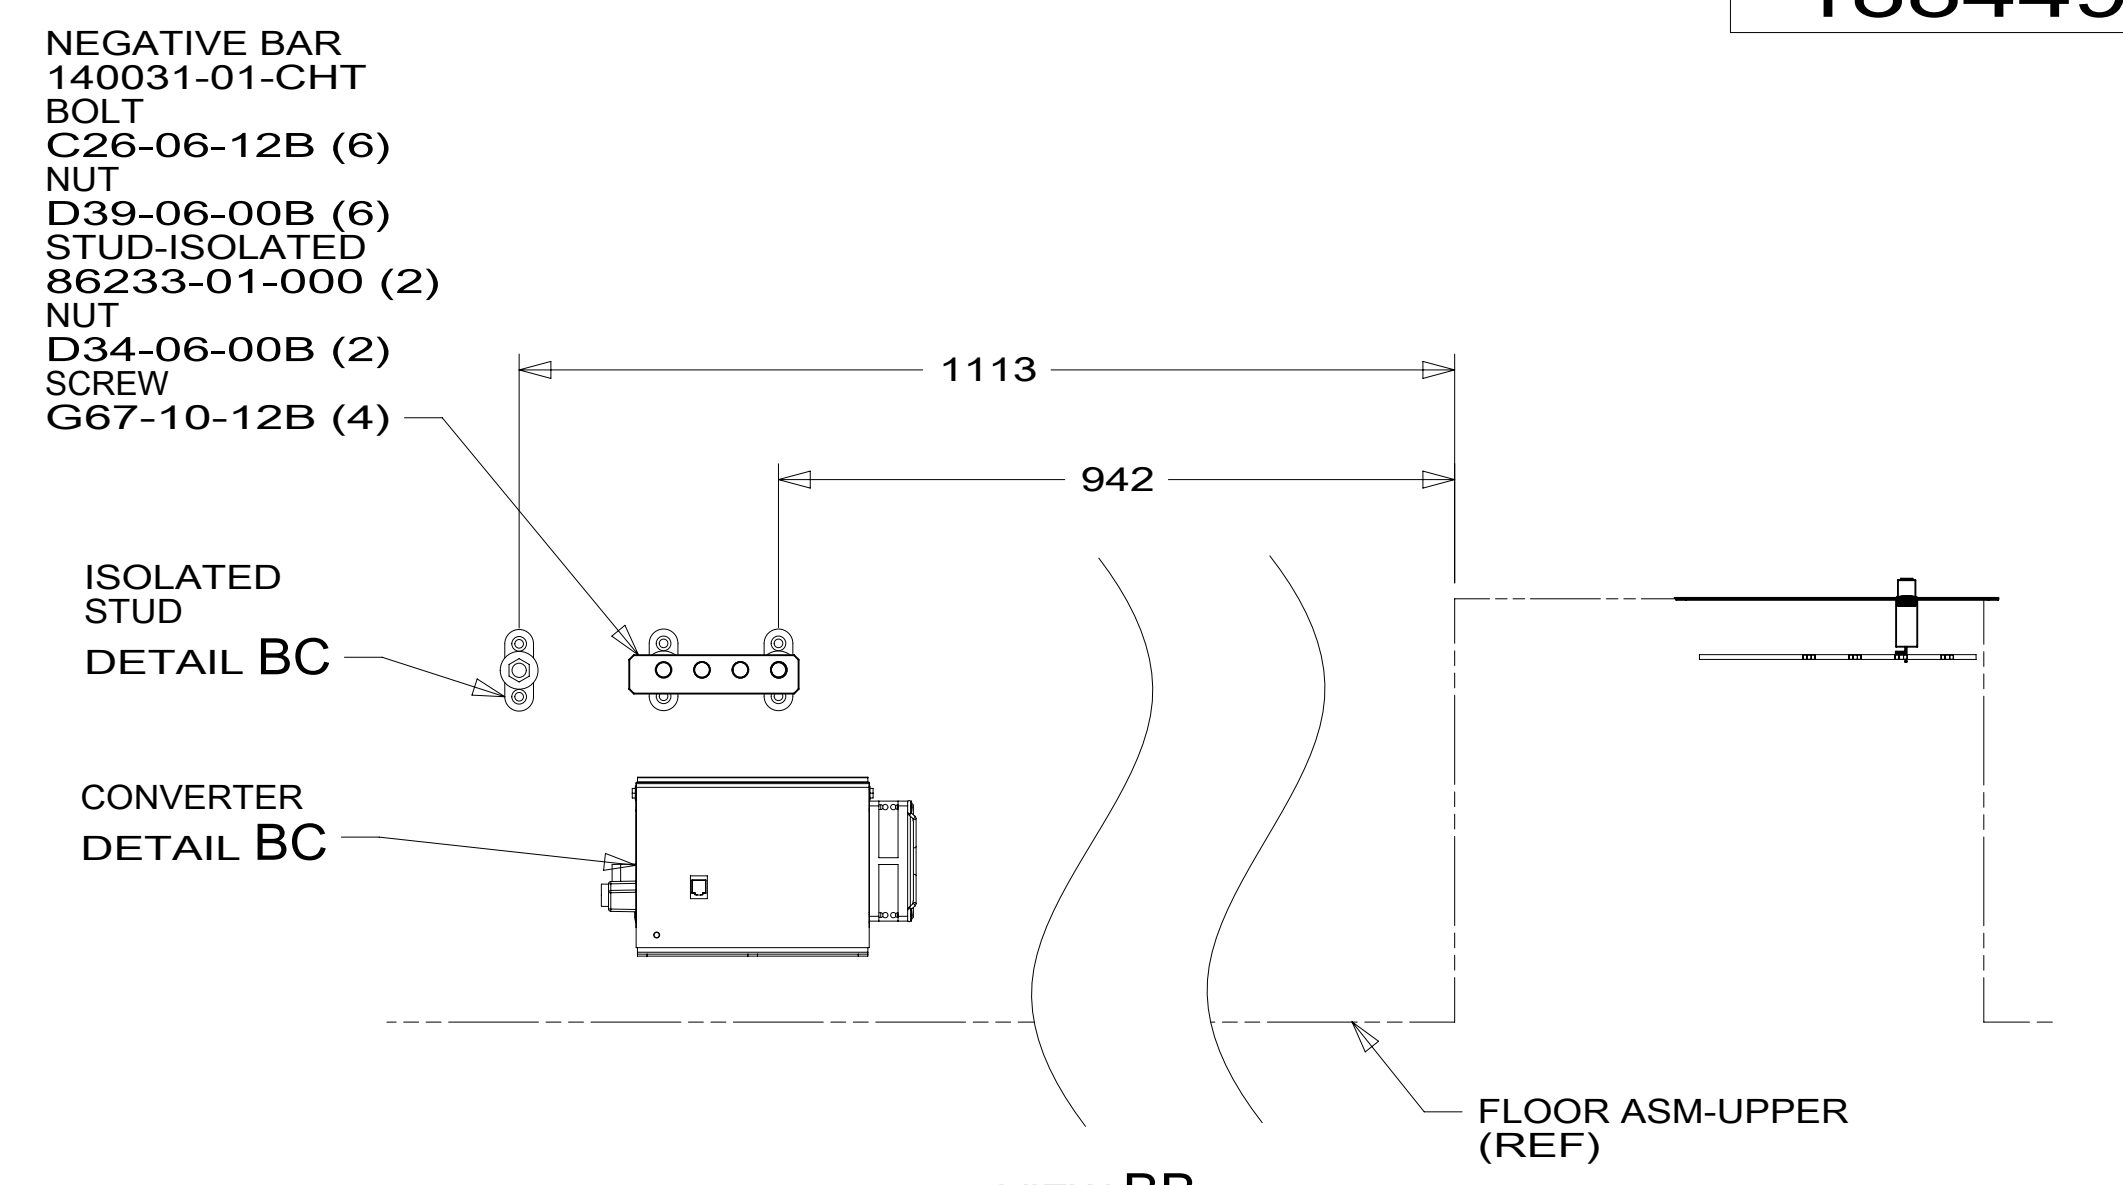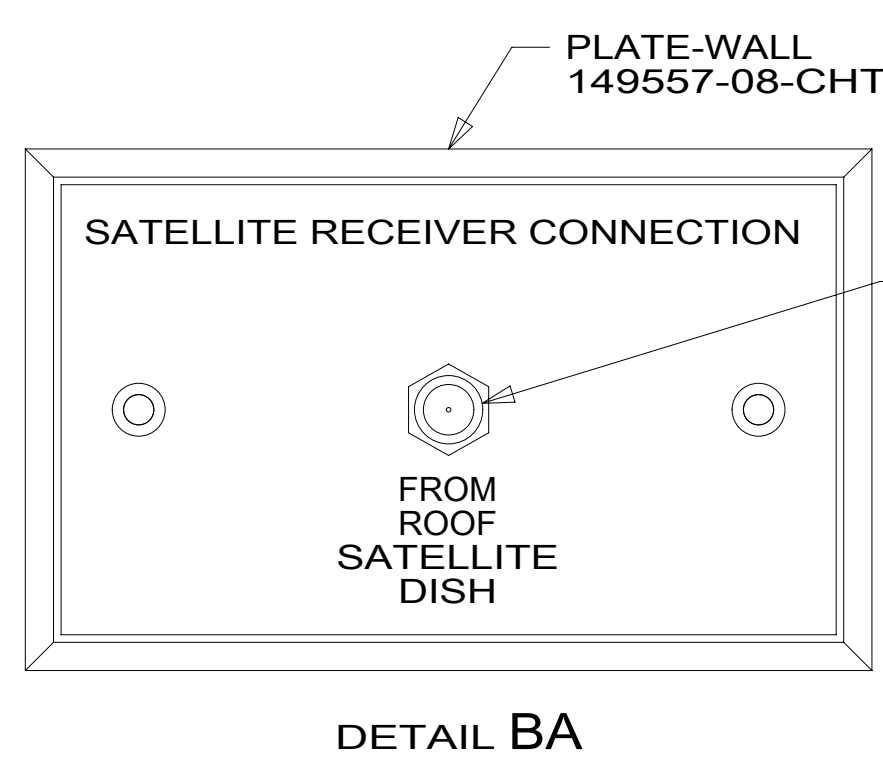

**3** FOR ADDITIONAL INFORMATION SEE WIRING INSTL-TV/DVD.  
**2** WIRE PASSES THRU FLOOR IN THIS AREA.

**1.** AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.


- (1JM) HOME THEATER SOUND SYSTEM
- (571) RADIO SPEAKERS
- (1DG) EXT ENTERTAIN CTR W/TV & CD
- (276) A/C ROOF-HI EFF (2) W/EMS
- (29R) AC HEAT PUMP-2 HI EFFICIENCY
- (61M) TV(REAR)-28" COLOR STEREO
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA

FIRST USED	
<b>15 D30A</b>	
DO NOT SCALE DRAWING	
TITLE: <b>WIRING INSTL-BODY, 12V</b>	
SHEET 2	PART NO <b>188449</b> REV
04-Feb-2015	

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

\* 188449 \*

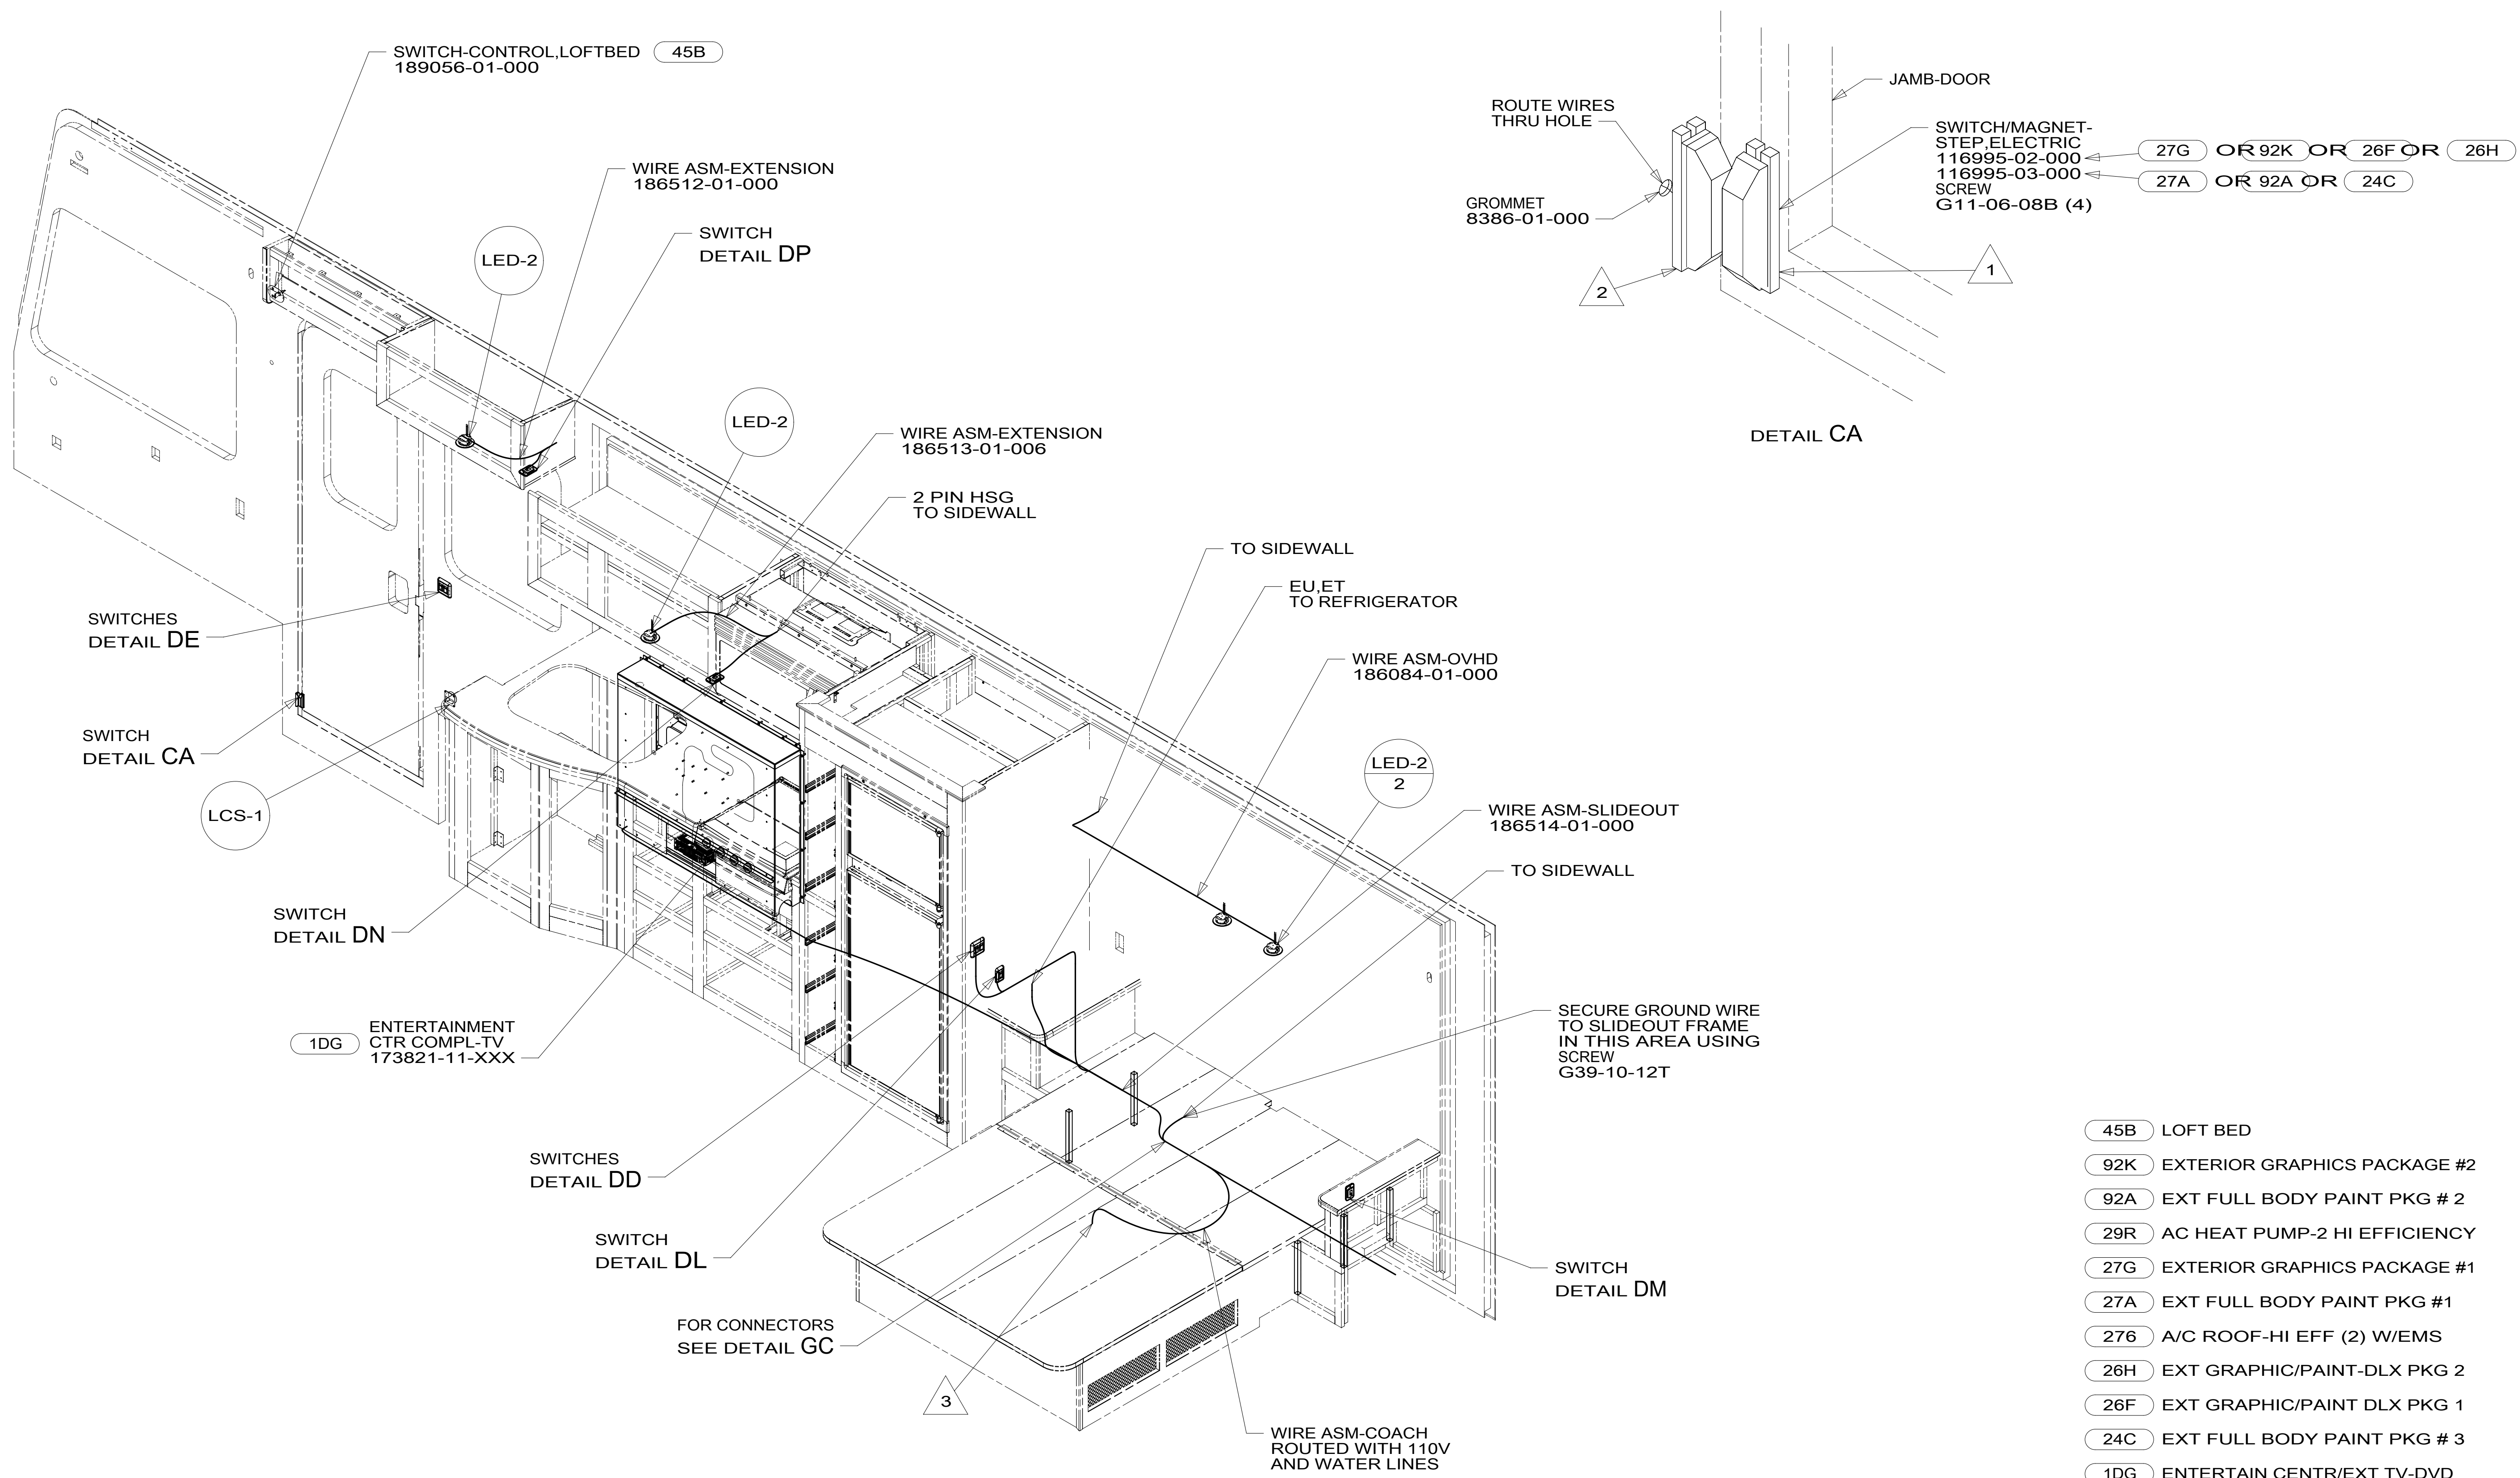

- (45B) LOFT BED
- (92K) EXTERIOR GRAPHICS PACKAGE #2
- (92A) EXT FULL BODY PAINT PKG # 2
- (29R) AC HEAT PUMP-2 HI EFFICIENCY
- (27G) EXTERIOR GRAPHICS PACKAGE #1
- (27A) EXT FULL BODY PAINT PKG #1
- (276) A/C ROOF-HI EFF (2) W/EMS
- (26H) EXT GRAPHIC/PAINT-DLX PKG 2
- (26F) EXT GRAPHIC/PAINT DLX PKG 1
- (24C) EXT FULL BODY PAINT PKG # 3
- (1DG) ENTERTAIN CTR/EXT TV-DVD
- (265) EXT ENTERTAIN CTR W/TV & CD
- (1B1) CODES/STANDARDS USA


(1B1)	(265)
FIRST USED	
<b>15 D30A</b>	
DO NOT SCALE DRAWING	
TITLE: <b>WIRING INSTL-BODY, 12V</b>	
SHEET 3	PART NO <b>188449</b> REV
1 04-Feb-2015	

4. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
- 3 WIRE PASSES THRU FLOOR IN THIS AREA.
- 2 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB, ADJUST HEIGHT TO MATCH MAGNET.
- 1 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

\*188449\*

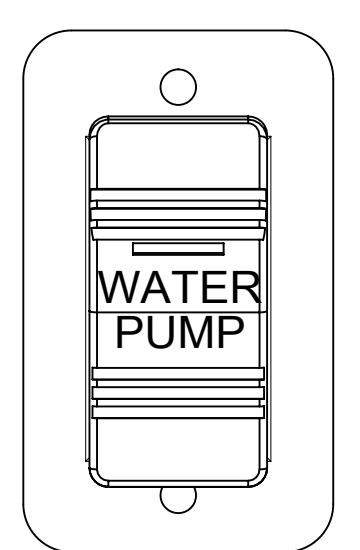


SWITCH-PUMP  
108357-21-000  
ACTUATOR  
108356-23-CHT  
PLATE  
98351-07-CHT  
SCREW  
G11-06-10U (2)

DETAIL DA

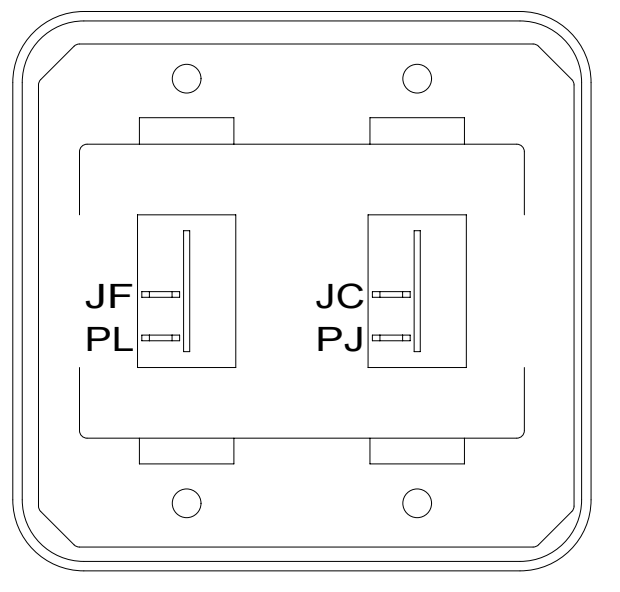

SWITCH-ROCKER  
135740-01-CHT (2)  
SWITCH-BASE  
135741-02-CHT  
SWITCH-BEZEL  
135742-02-CHT  
SCREW  
G11-08-08U (4)

DETAIL DE

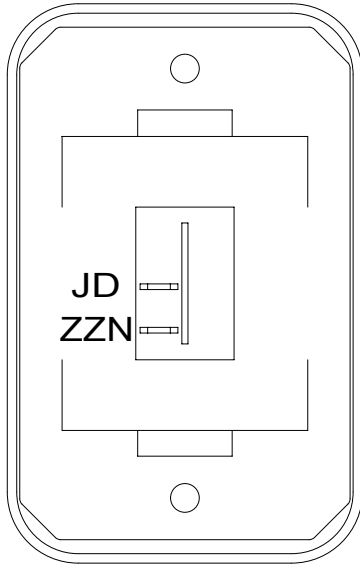


SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

DETAIL DL


LABEL-SLIDEOUT,  
PASSENGER,REAR  
163992-03-CHT

PASSENGER'S  
SIDE REAR

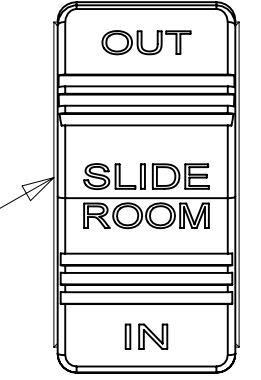


SWITCH-ROCKER  
108357-07-000  
ACTUATOR-SWITCH  
108356-24-CHT  
(BBM,DT,BBN)

DRIVER'S  
SIDE FRONT

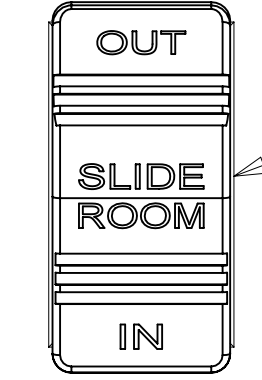


LABEL-SLIDEOUT,  
DRIVER,FRONT  
163992-01-CHT

SWITCH-ROCKER  
108357-07-000  
ACTUATOR-SWITCH  
108356-24-CHT  
(DR,DT,DU)

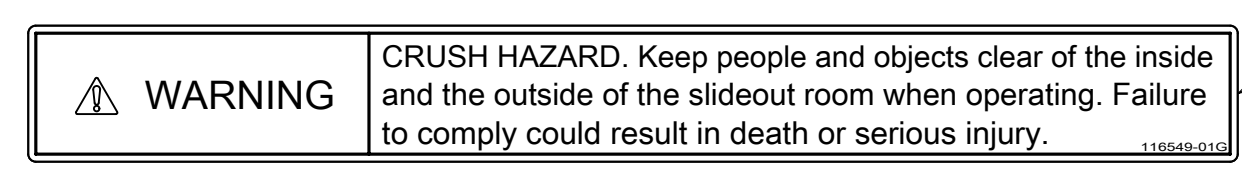


LABEL-WARNING,  
SLIDEOUT  
116549-01-000

DETAIL DJ

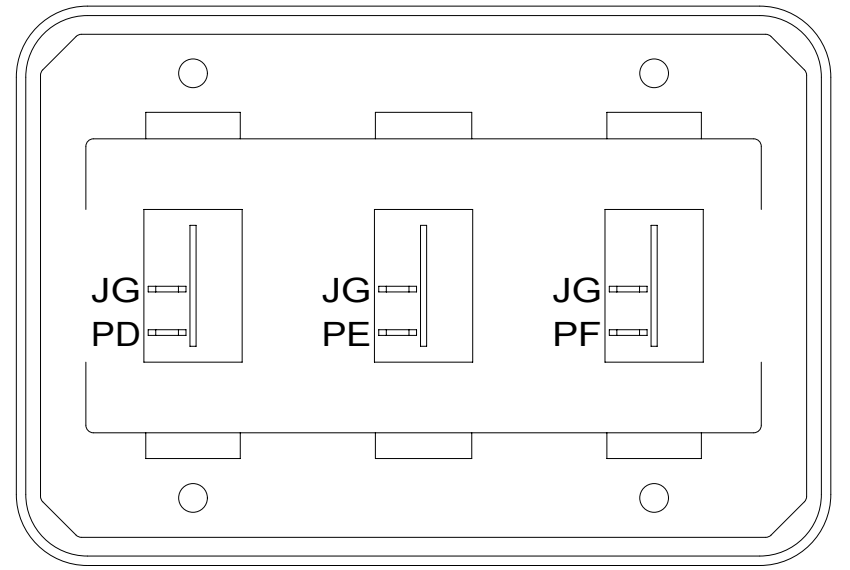


SWITCH-ROCKER  
135740-01-CHT (3)  
SWITCH-BASE  
135741-03-CHT  
SWITCH-BEZEL  
135742-03-CHT  
SCREW  
G11-08-08U (4)

DETAIL DB

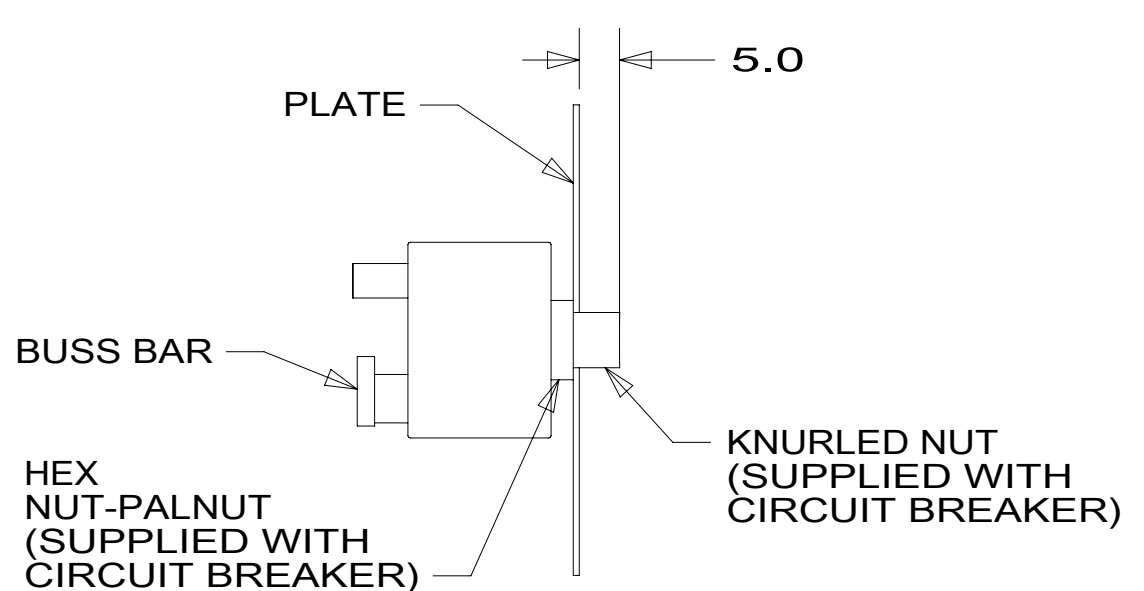


DETAIL DF-DF

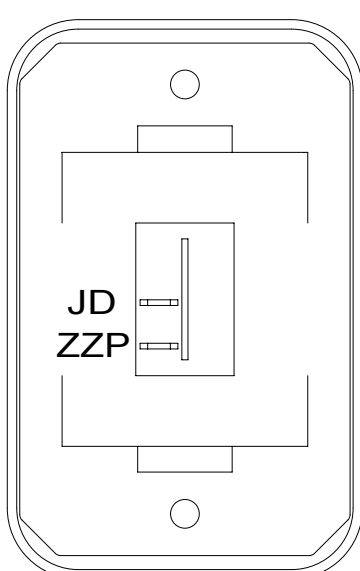


SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

DETAIL DM

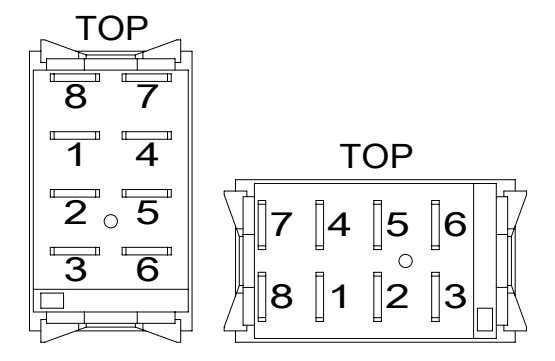


DETAIL DK

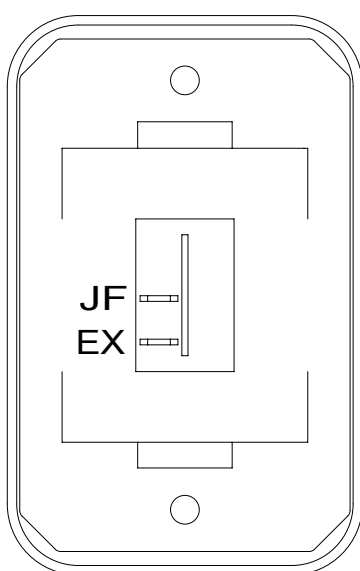

SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

DETAIL DN

SWITCH-AWNING  
108357-06-000  
ACTUATOR  
108356-12-CHT  
FFD,FFE,TTP,JJS

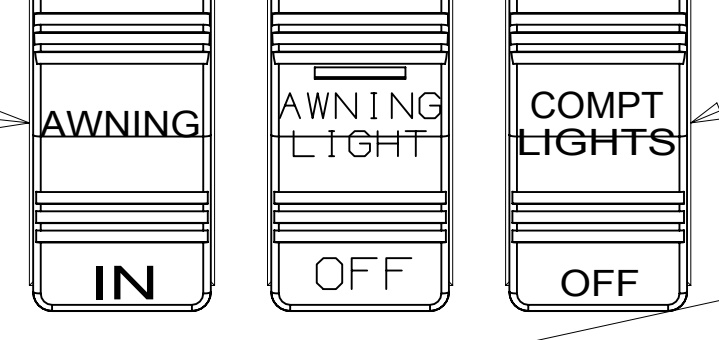


SWITCH-AWNING LIGHTS  
108357-14-000  
ACTUATOR-SWITCH  
108356-28-CHT

SWITCH-COMPT LIGHTS  
108357-01-000  
ACTUATOR-SWITCH  
108356-14-CHT  
CIRCUITS WC,WA

SWITCH-AWNING LIGHTS  
108357-14-000  
ACTUATOR-SWITCH  
108356-28-CHT

SWITCH-AWNING  
108357-06-000  
ACTUATOR  
108356-12-CHT  
FFD,FFE,FFR,JJR

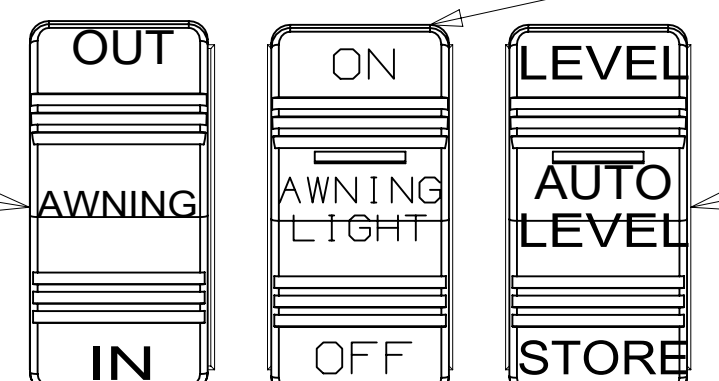


SWITCH-AUTO LEVEL  
108357-18-000  
ACTUATOR-SWITCH  
108356-15-CHT  
SSD,SSE,SSC,SSE,SSF

PLATE-SWITCH  
158431-28-CHT  
SEAL-FUSE BOX  
092492-25-000  
SCREW  
000G11-06-10U (6)


STEP-SWITCH  
108357-19-000  
CIRCUITS ER,ES

SWITCH-COACH BATTERY  
108357-18-000  
ACTUATOR-SWITCH  
108356-19-CHT  
CIRCUITS  
KF,LJ,LG,LH,WC  
WIRE ASM-THERMISTOR  
186796-01-000

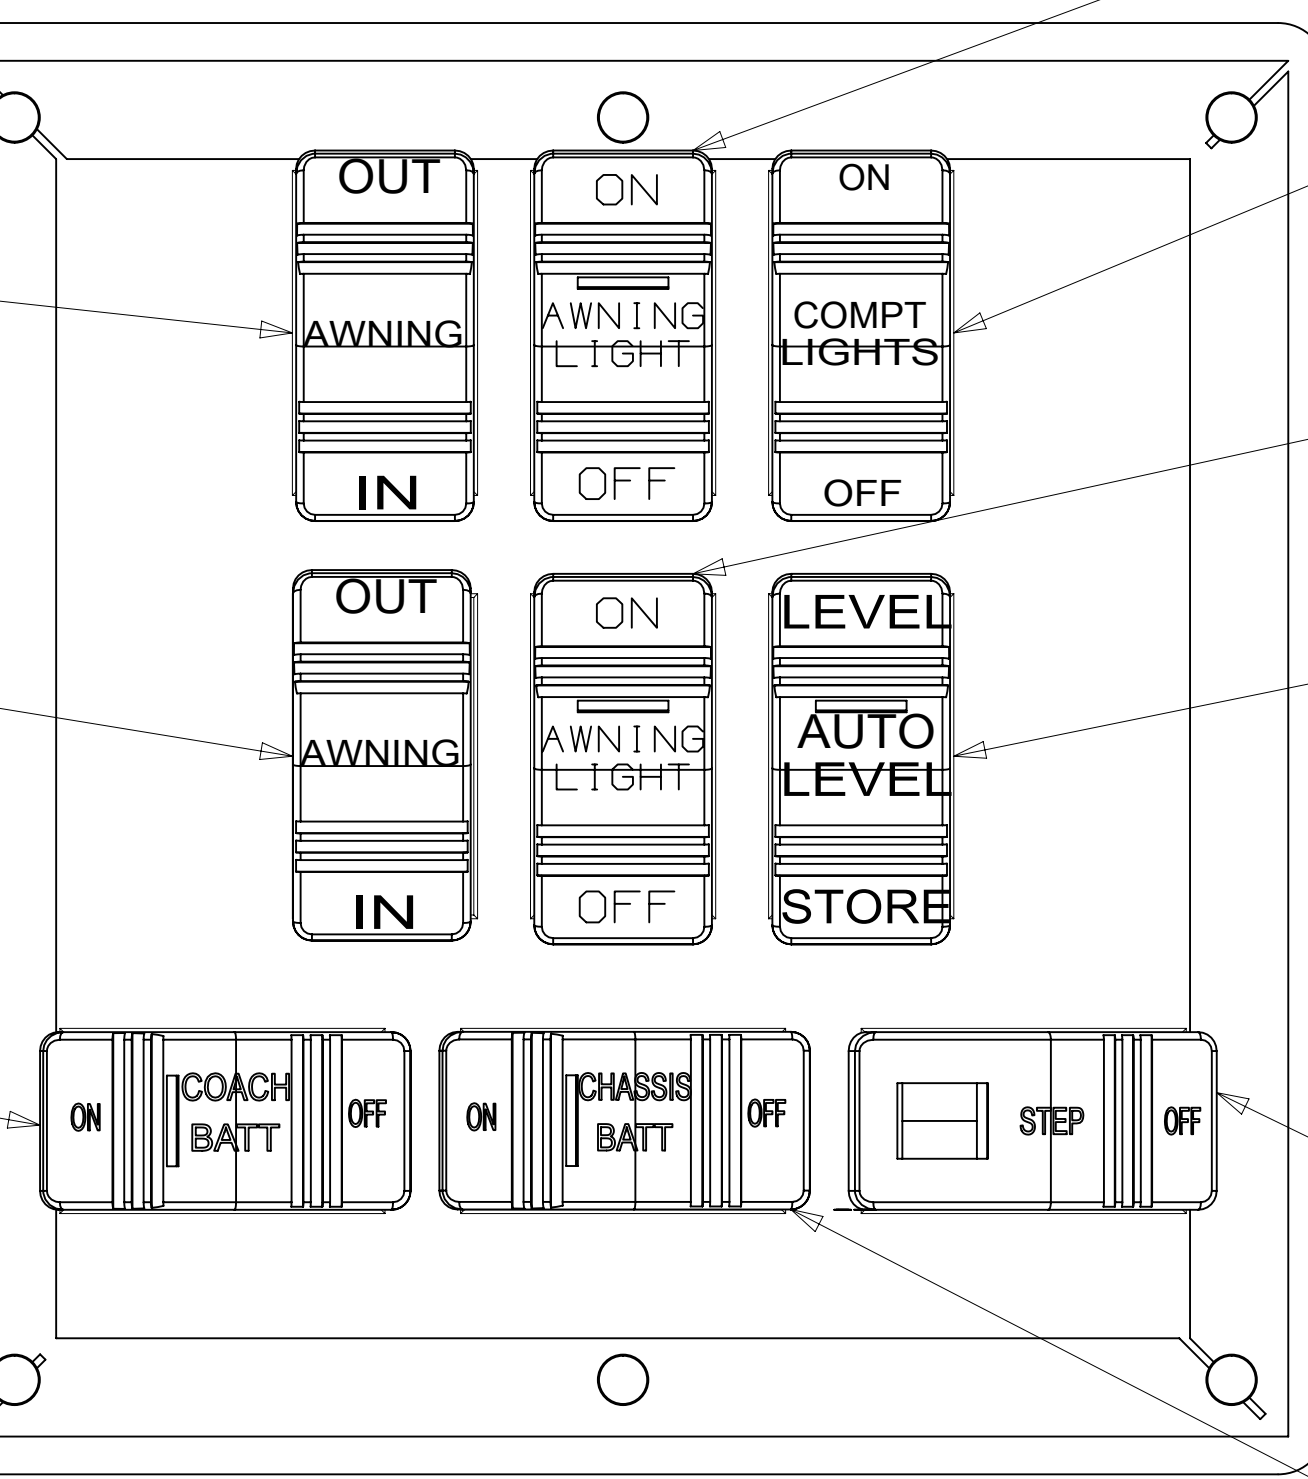


SWITCH-CHASSIS BATTERY  
108357-18-000  
ACTUATOR-SWITCH  
108356-20-CHT  
CIRCUITS  
TTY,TTZ,MK,UUB,UUC  
WIRE ASM-THERMISTOR  
186796-01-000

DETAIL DH 1

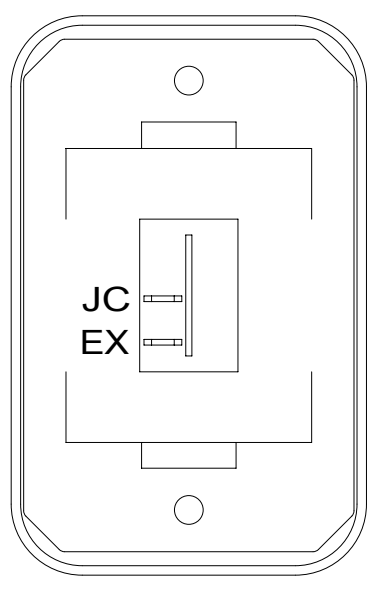


SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

DETAIL DP

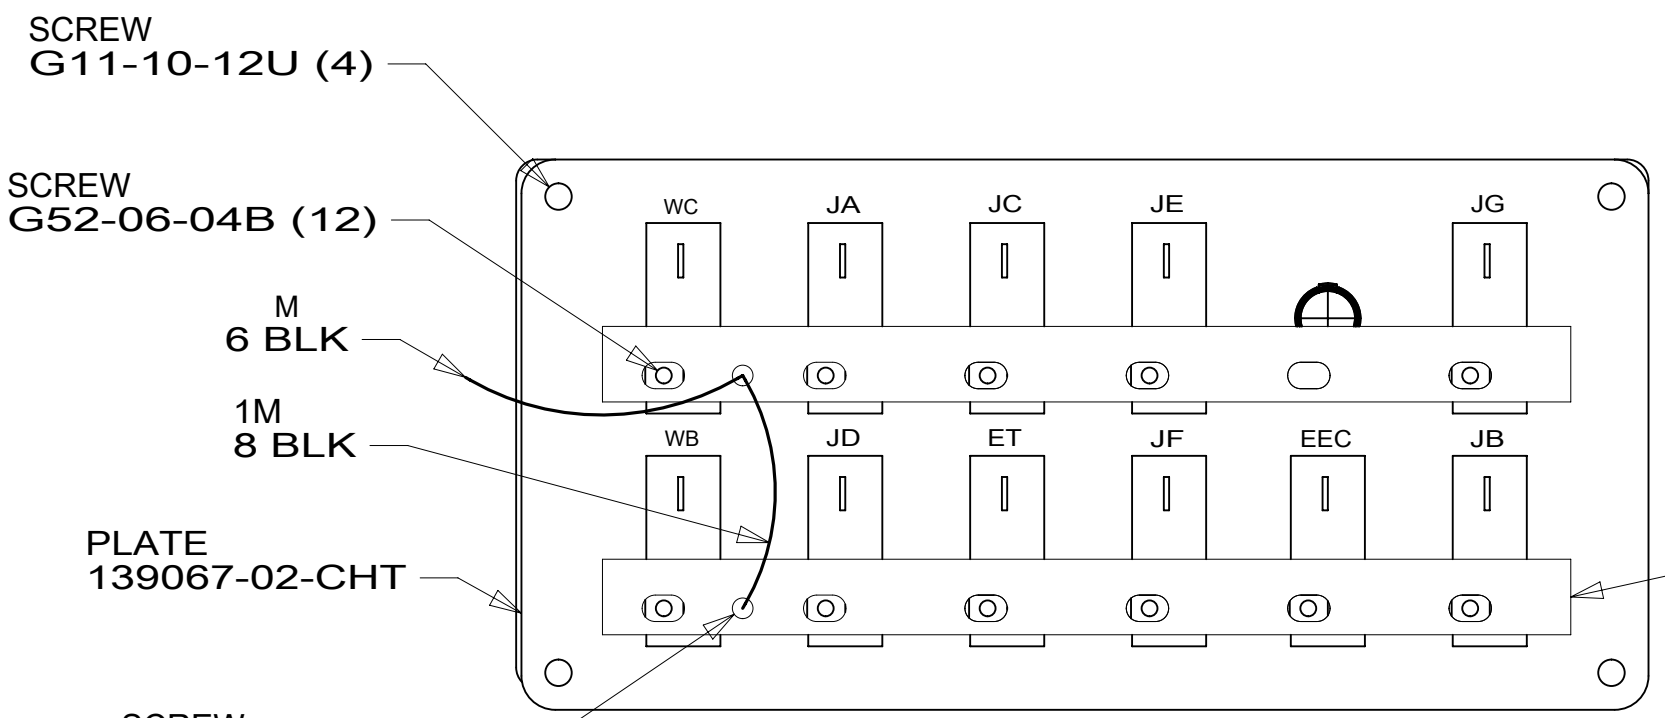

DETAIL DG  
(BACK VIEW)

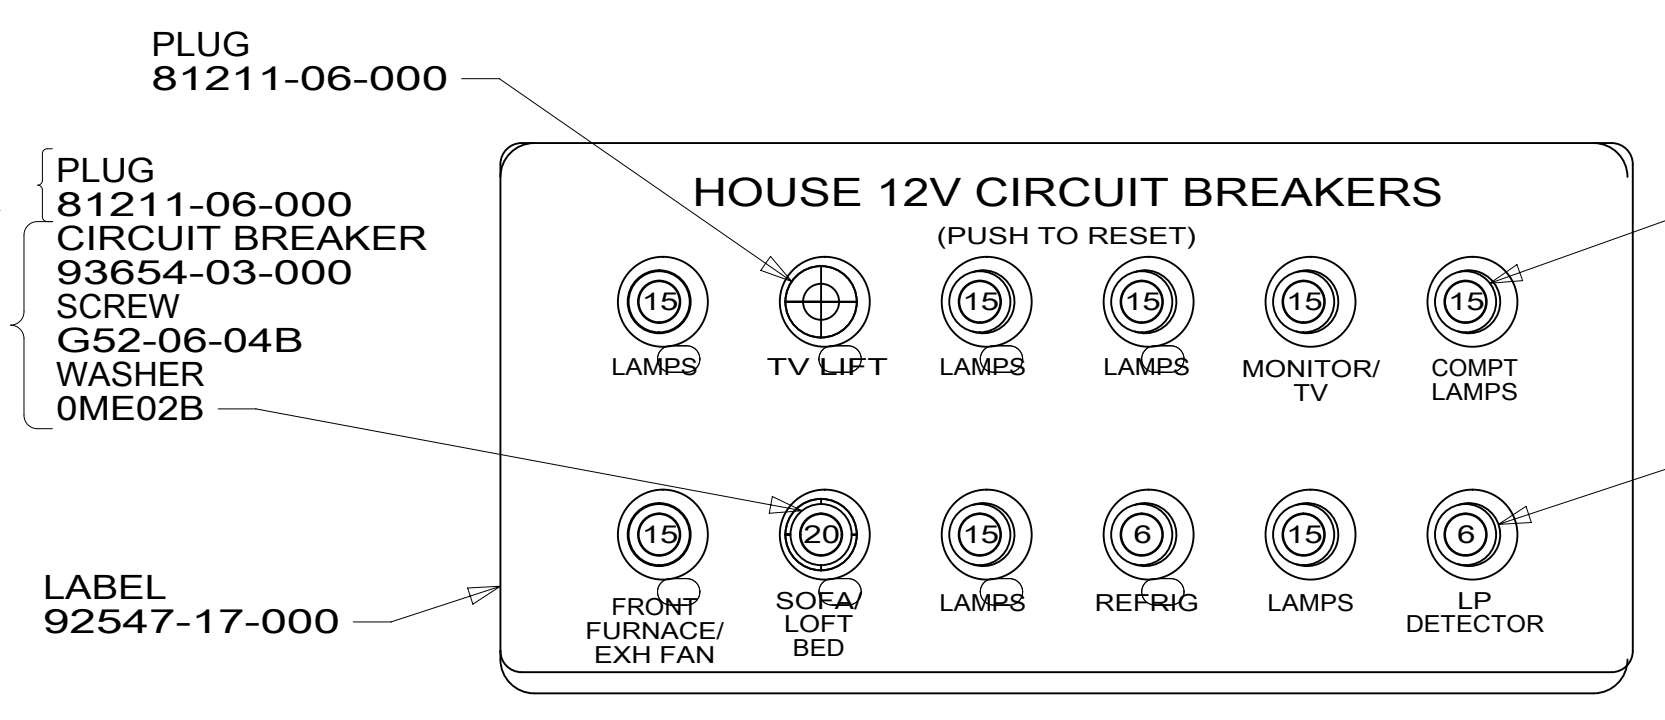

DETAIL DG  
(FRONT VIEW)

SCREW  
G11-10-12U (4)  
SCREW  
G52-06-04B (12)  
6 BLK  
1M  
8 BLK  
PLATE  
139067-02-CHT  
SCREW  
G39-08-06B (2)

BUSS BAR  
92786-05-000 (2)

PLUG  
81211-06-000  
2  
PLUG  
81211-06-000  
CIRCUIT BREAKER  
93654-03-000  
SCREW  
G52-06-04B  
WASHER  
OME02B  
45B

CIRCUIT BREAKER  
93654-02-000 (8)  
CIRCUIT BREAKER  
93654-01-000 (2)

LABEL  
92547-17-000

NOTES:  
3 PLACE AROUND ENTIRE PERIMETER WITH SEAM AT BOTTOM.  
2 WITHOUT 45B  
1 FOR SWITCH ORIENTATION SEE DETAIL DK.

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

45B LOFT BED  
265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

1B1	265
FIRST USED	
<b>15 D30A</b>	
<b>DO NOT SCALE DRAWING</b>	
<b>TITLE: WIRING INSTL-BODY, 12V</b>	
SHEET 4	PART NO 188449 REV


\* 188449 A \*

8

7

6

5



4

3


2

1


45B LAMP-LED  
190024-01-000

1JM SPEAKER-ROUND, CEILING  
179783-01-CHT (3)  
SCREW  
000G12-08-12U (12)

LED-4  
12

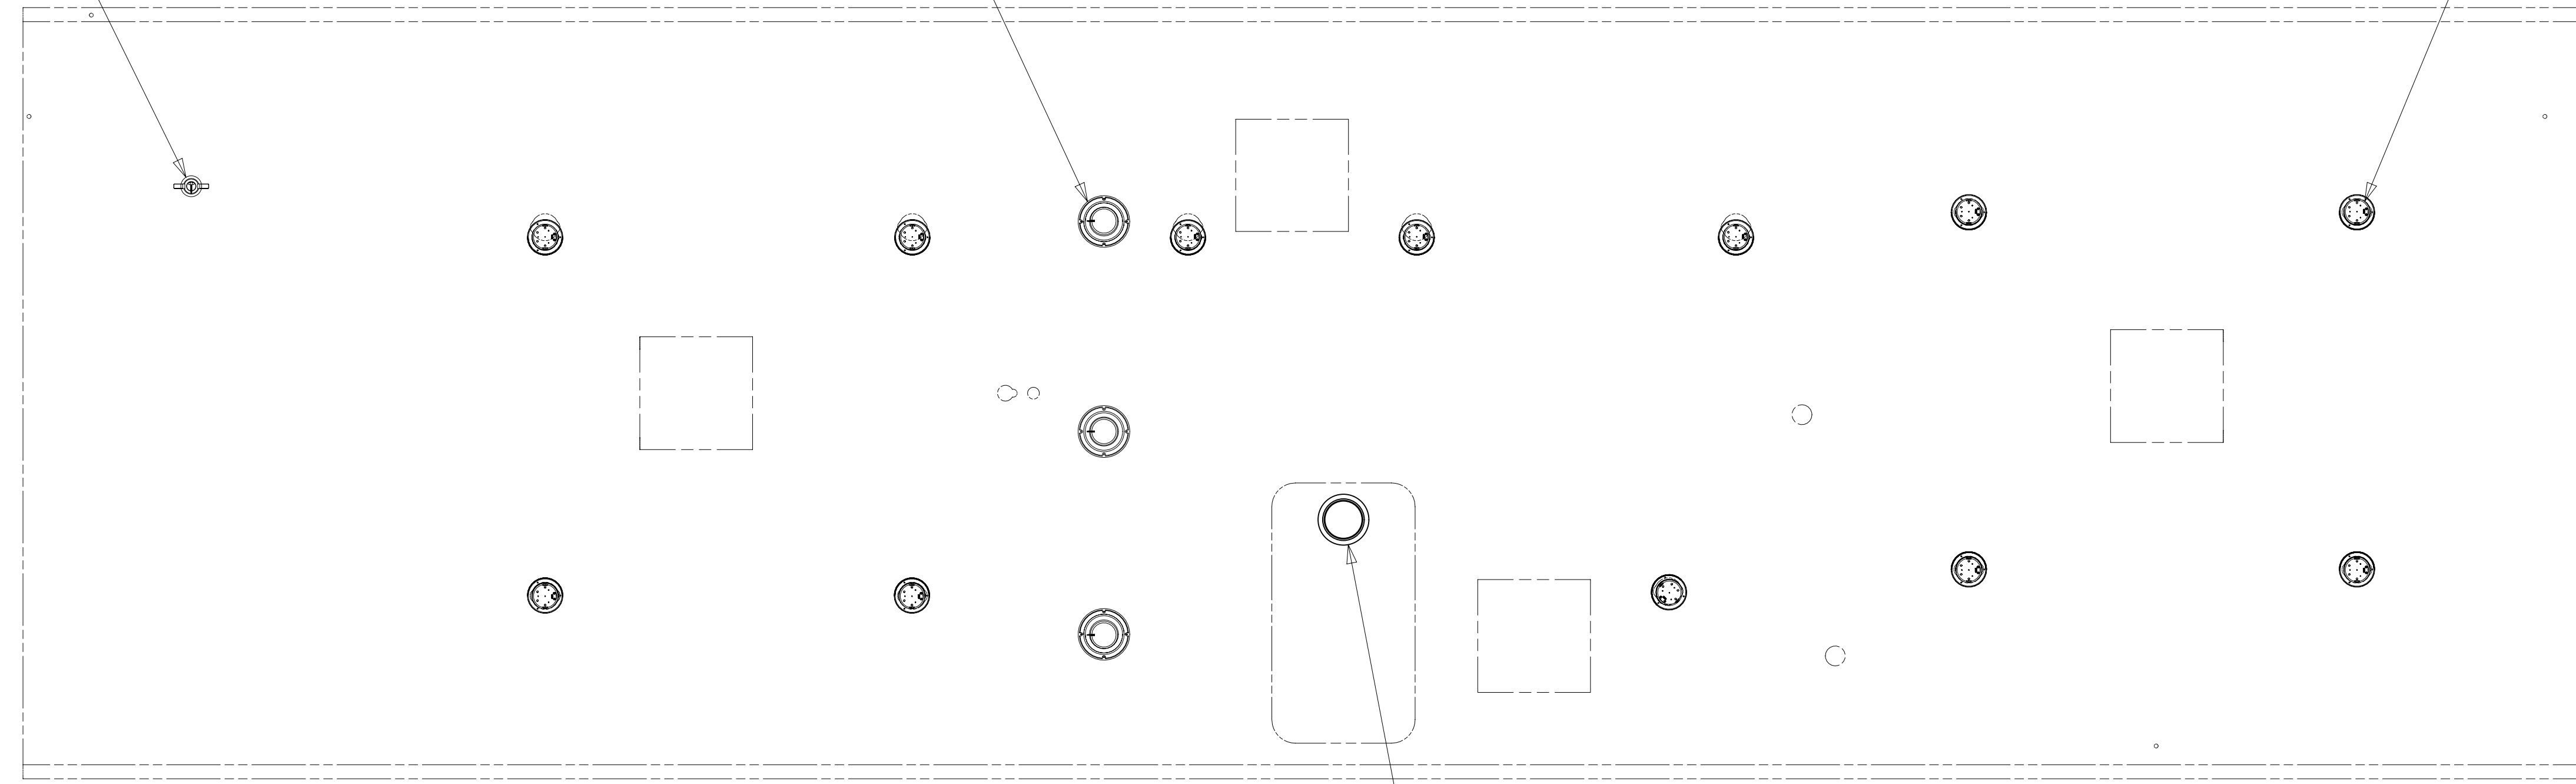

LSH-3

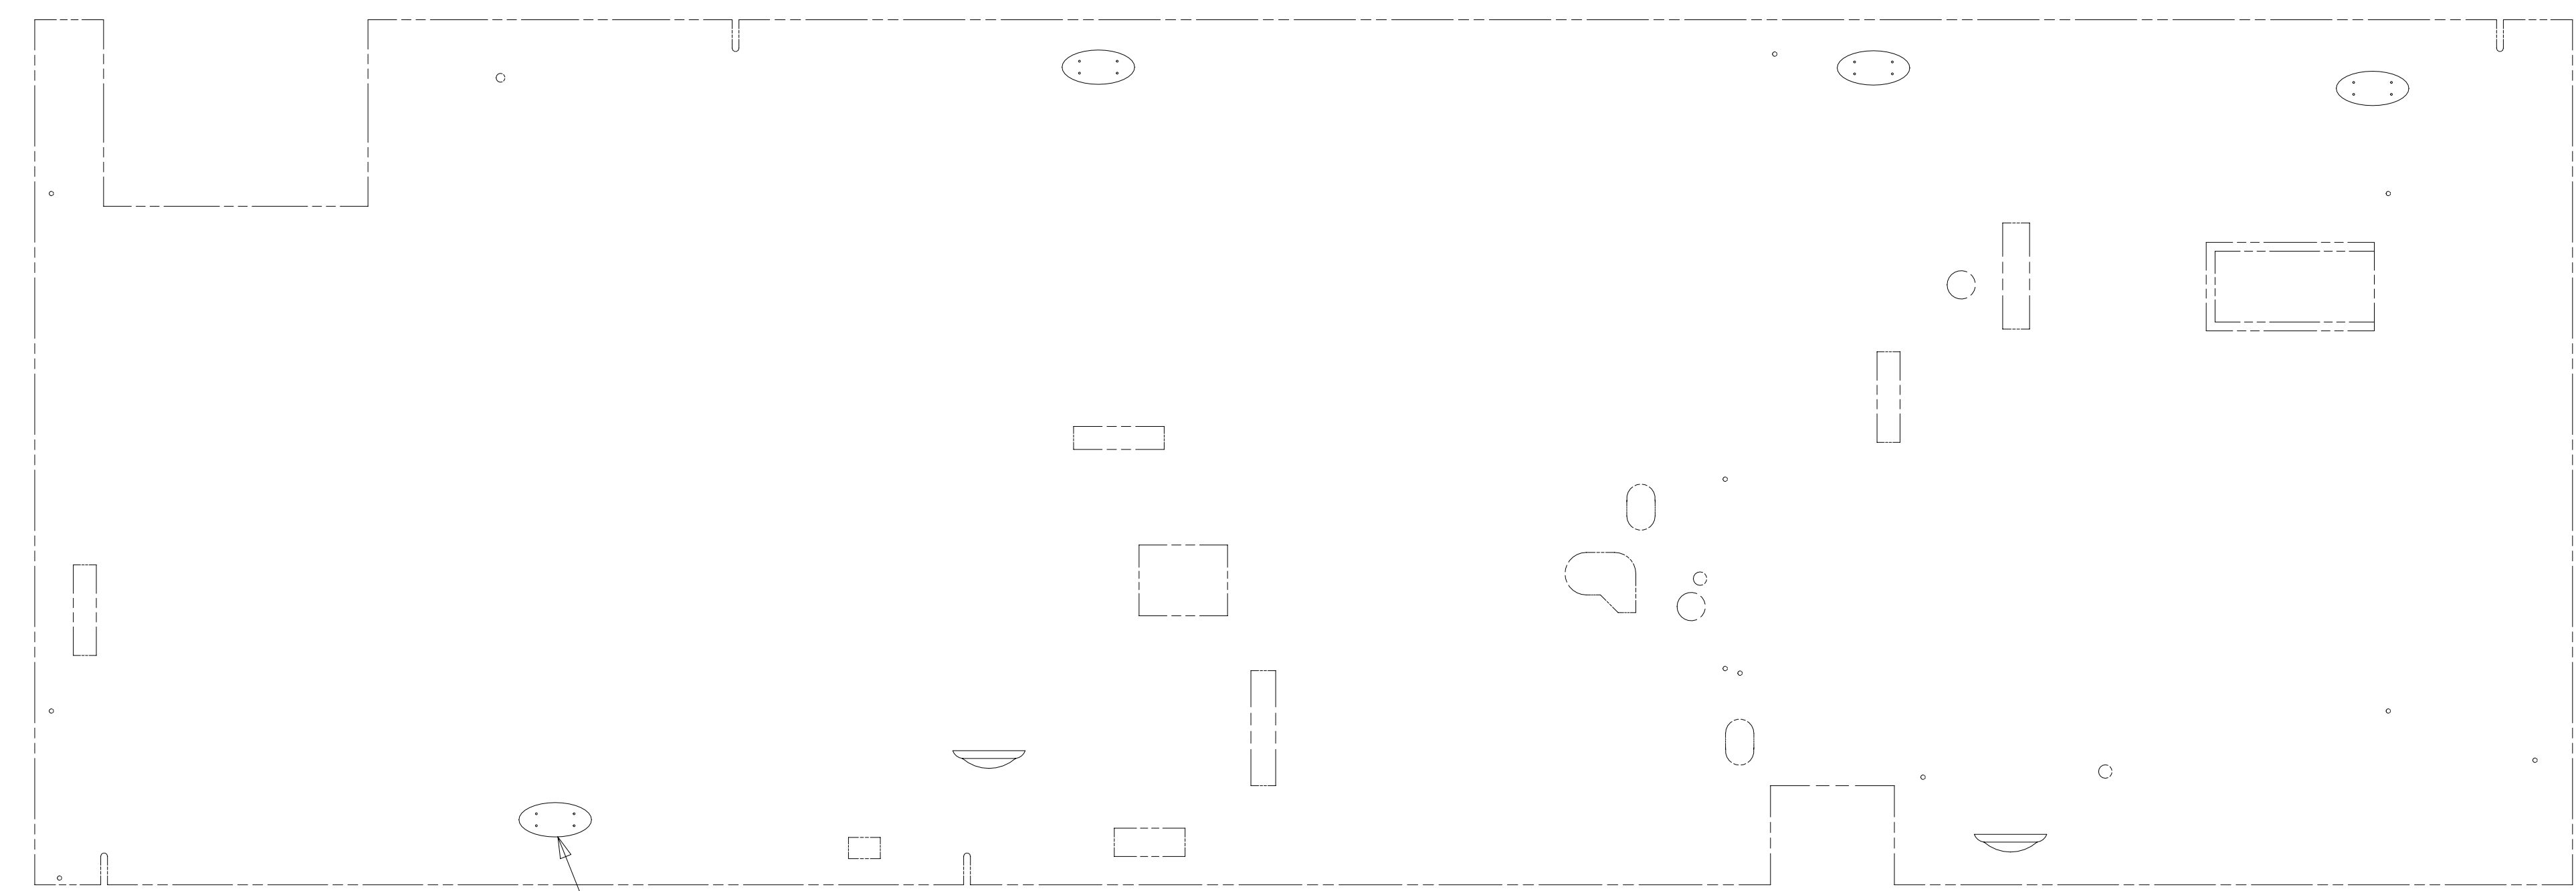

LO1-3 WASHER-PLASTIC  
180671-02-CHT (4)

- 45B LOFT BED
- 1JM HOME THEATER SOUND SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

FIRST USED	<b>15 D30A</b>	
DO NOT SCALE DRAWING		
TITLE: <b>WIRING INSTL-BODY, 12V</b>		
SHEET 5	PART NO <b>188449</b>	REV
1 04-Feb-2015		

8

7

6

5




4

3

2

1

\* 188449 \* A


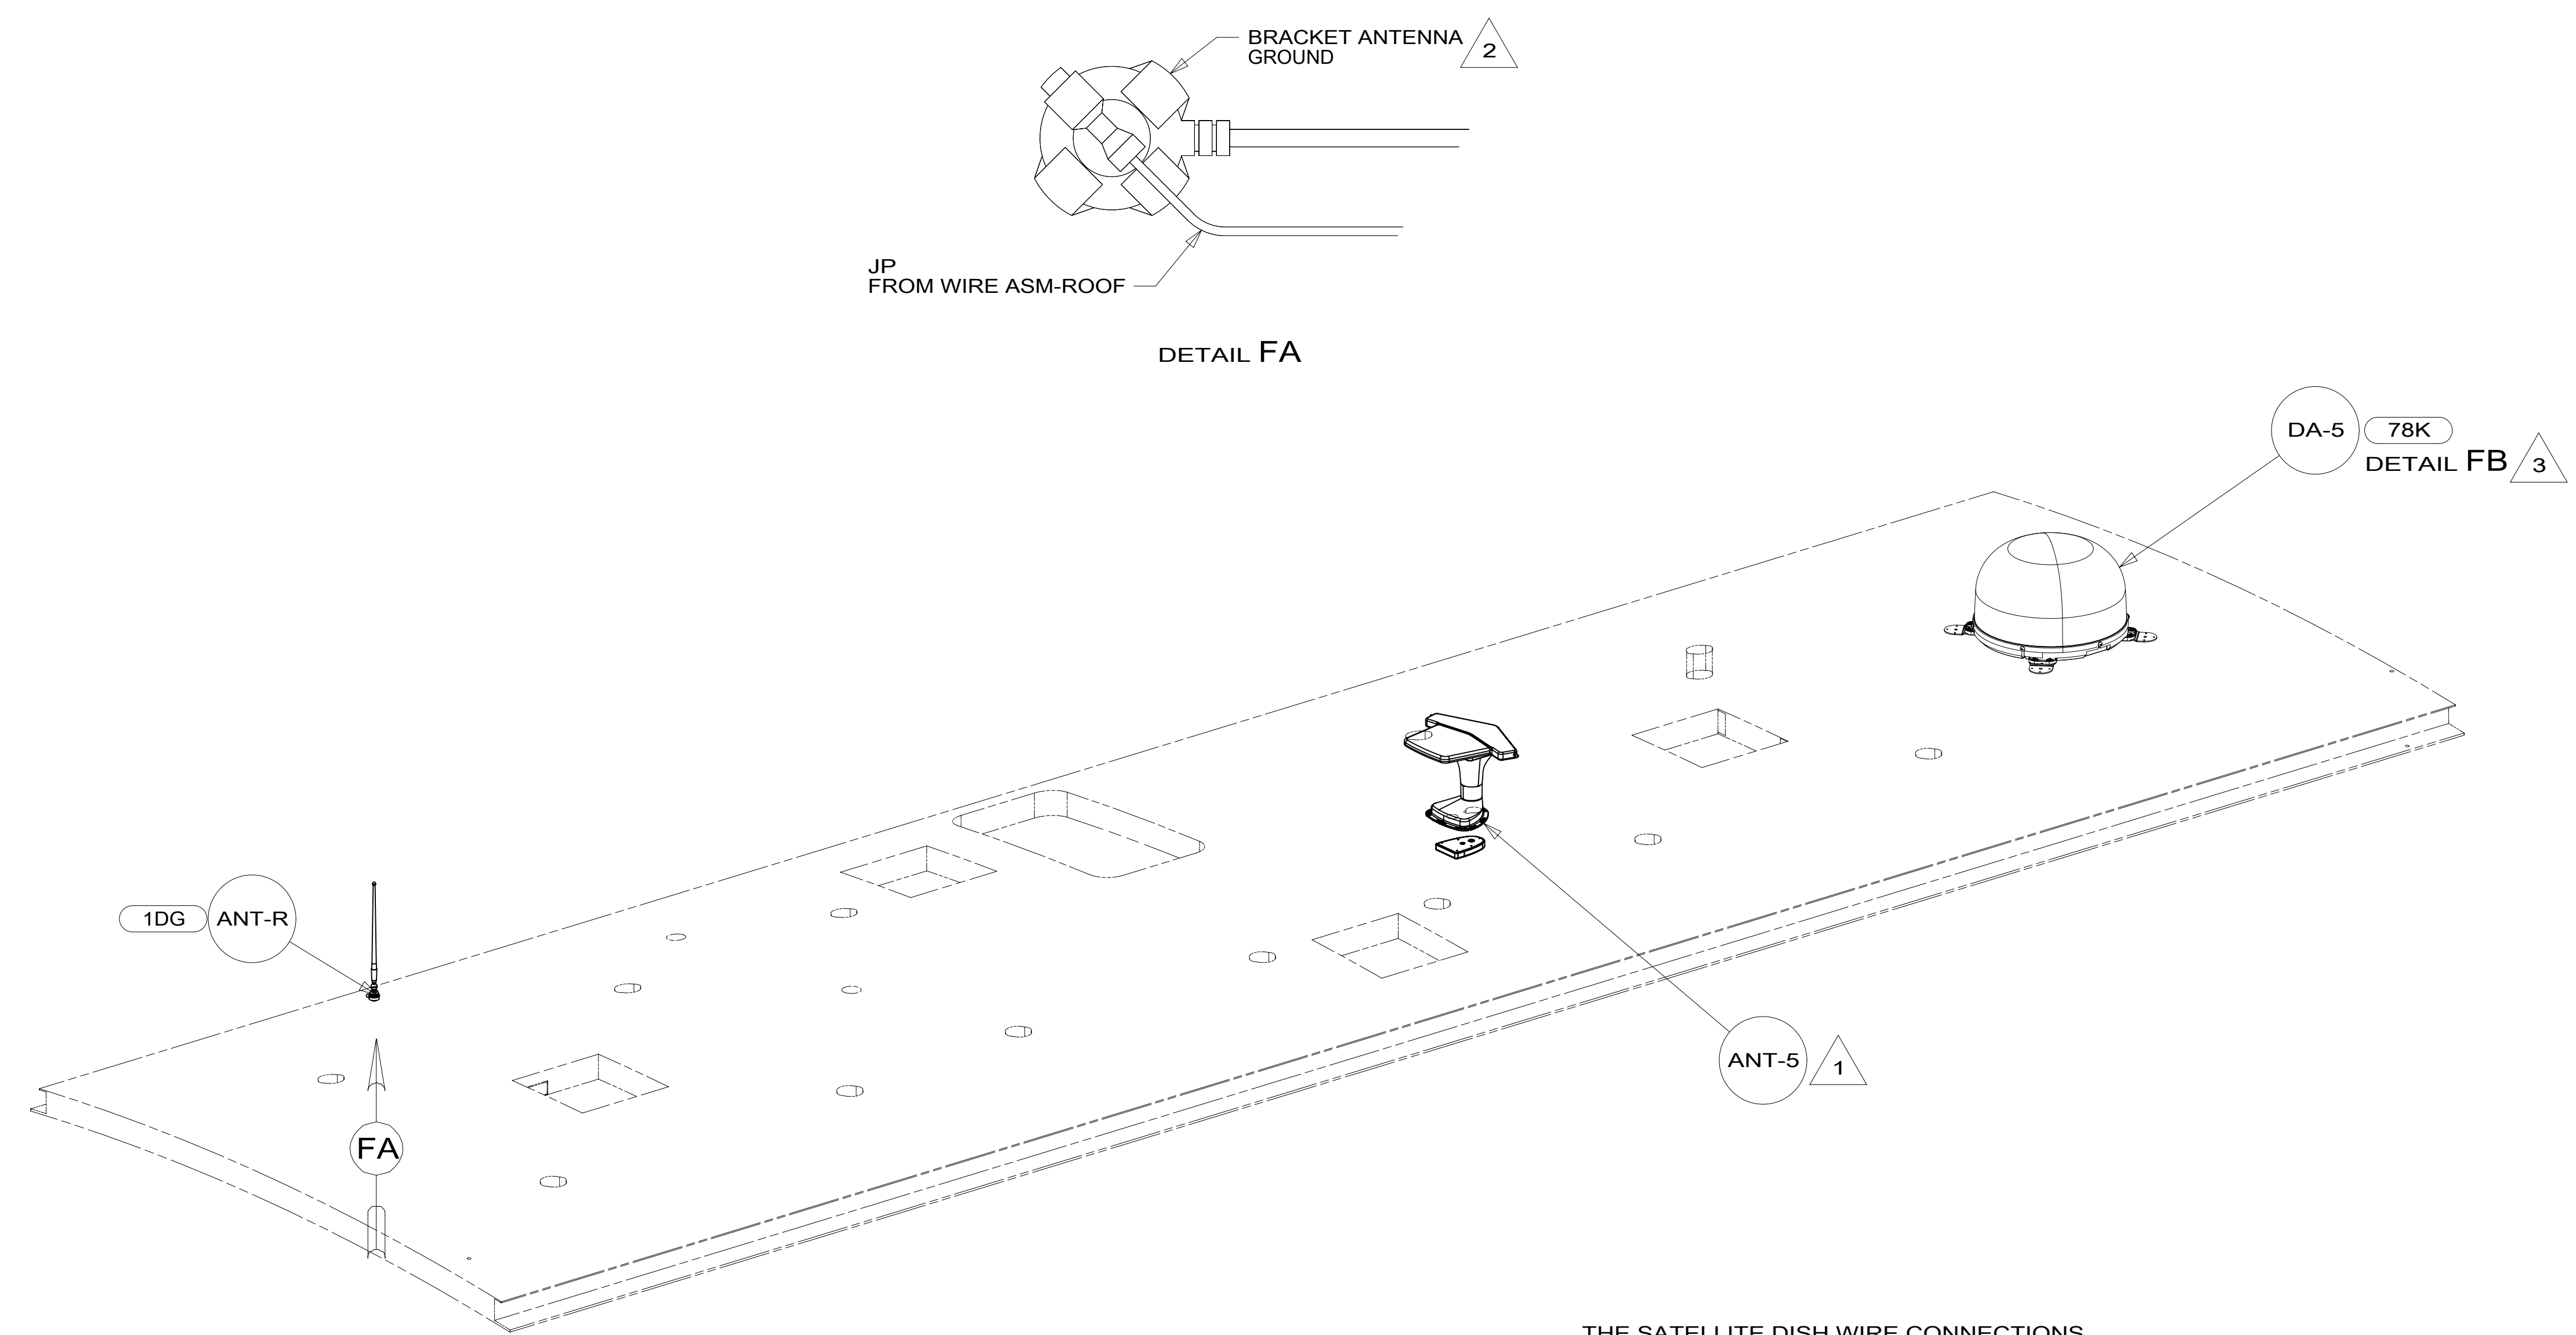


THE SATELLITE DISH WIRE CONNECTIONS ARE TO BE PLACED ON THE CENTERLINE OF THE MOTORHOME FACING FORWARD

CONNECT 2-PIN HOUSING FROM ROOF ASM TO SATELLITE DISH HERE AND ADD CONVOLUTED TUBING

CONNECT CABLE ASM COAX (ORG-2) FROM ROOF ASM TO SEC INPUT ON SATELLITE DISH

CONNECT CABLE ASM COAX (ORG) FROM ROOF ASM TO MAIN INPUT ON SATELLITE DISH

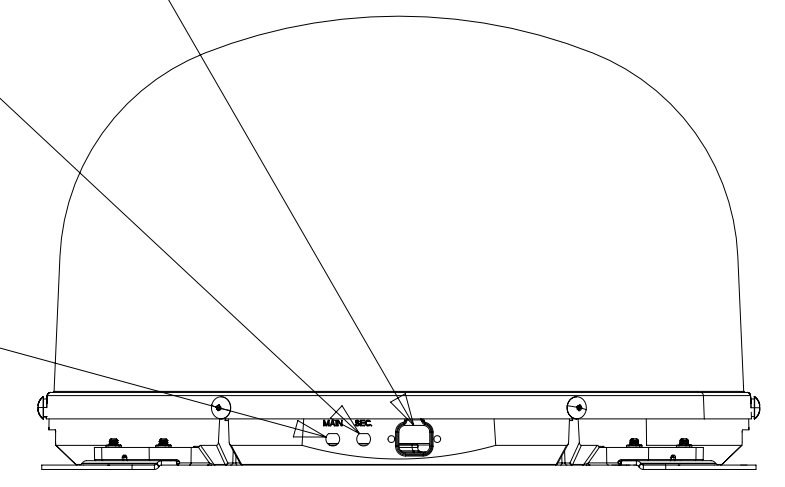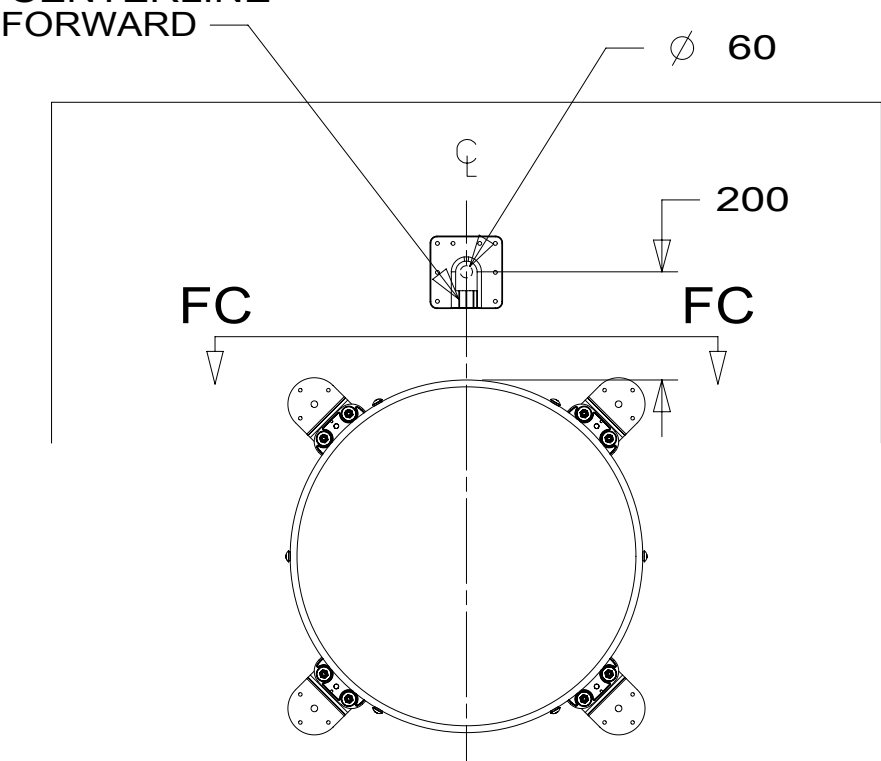

VIEW FC-FC

- 78K SATELLITE TV SYSTEM AUTO
- 1DG EXT ENTERTAIN CTR W/TV & CD
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA









FIRST USED	
<b>15 D30A</b>	
DO NOT SCALE DRAWING	
TITLE: <b>WIRING INSTL-BODY, 12V</b>	
SHEET 6	PART NO <b>188449</b> REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- NOTES:
- 3 SEE MANUFACTURER'S INSTALLATION FOR ADDITIONAL INFORMATION.
  - 2 WRAP BRACKET LEGS AROUND ANTENNA BASE.
  - 1 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.

\* 188449 \* A

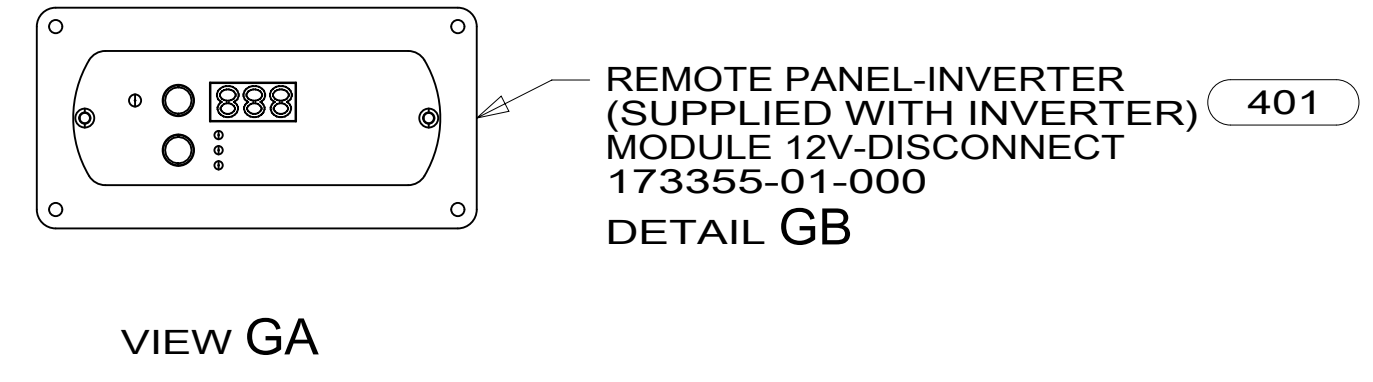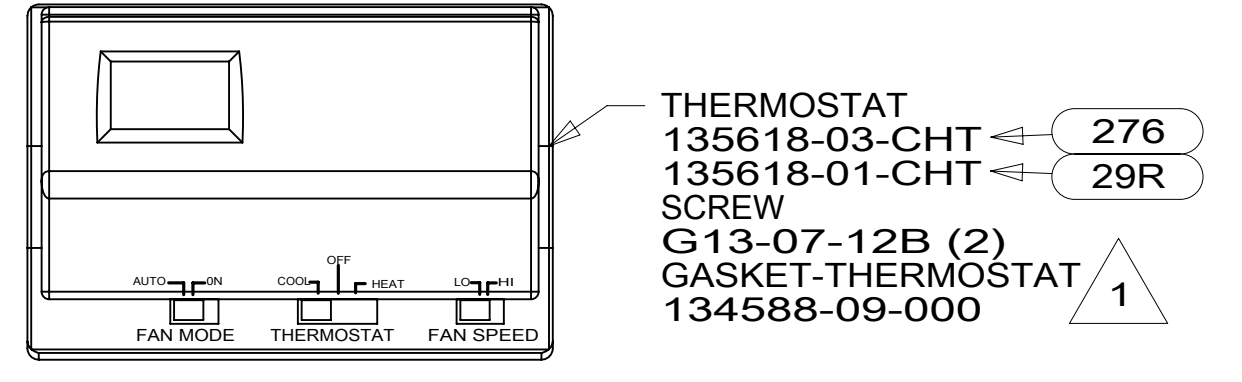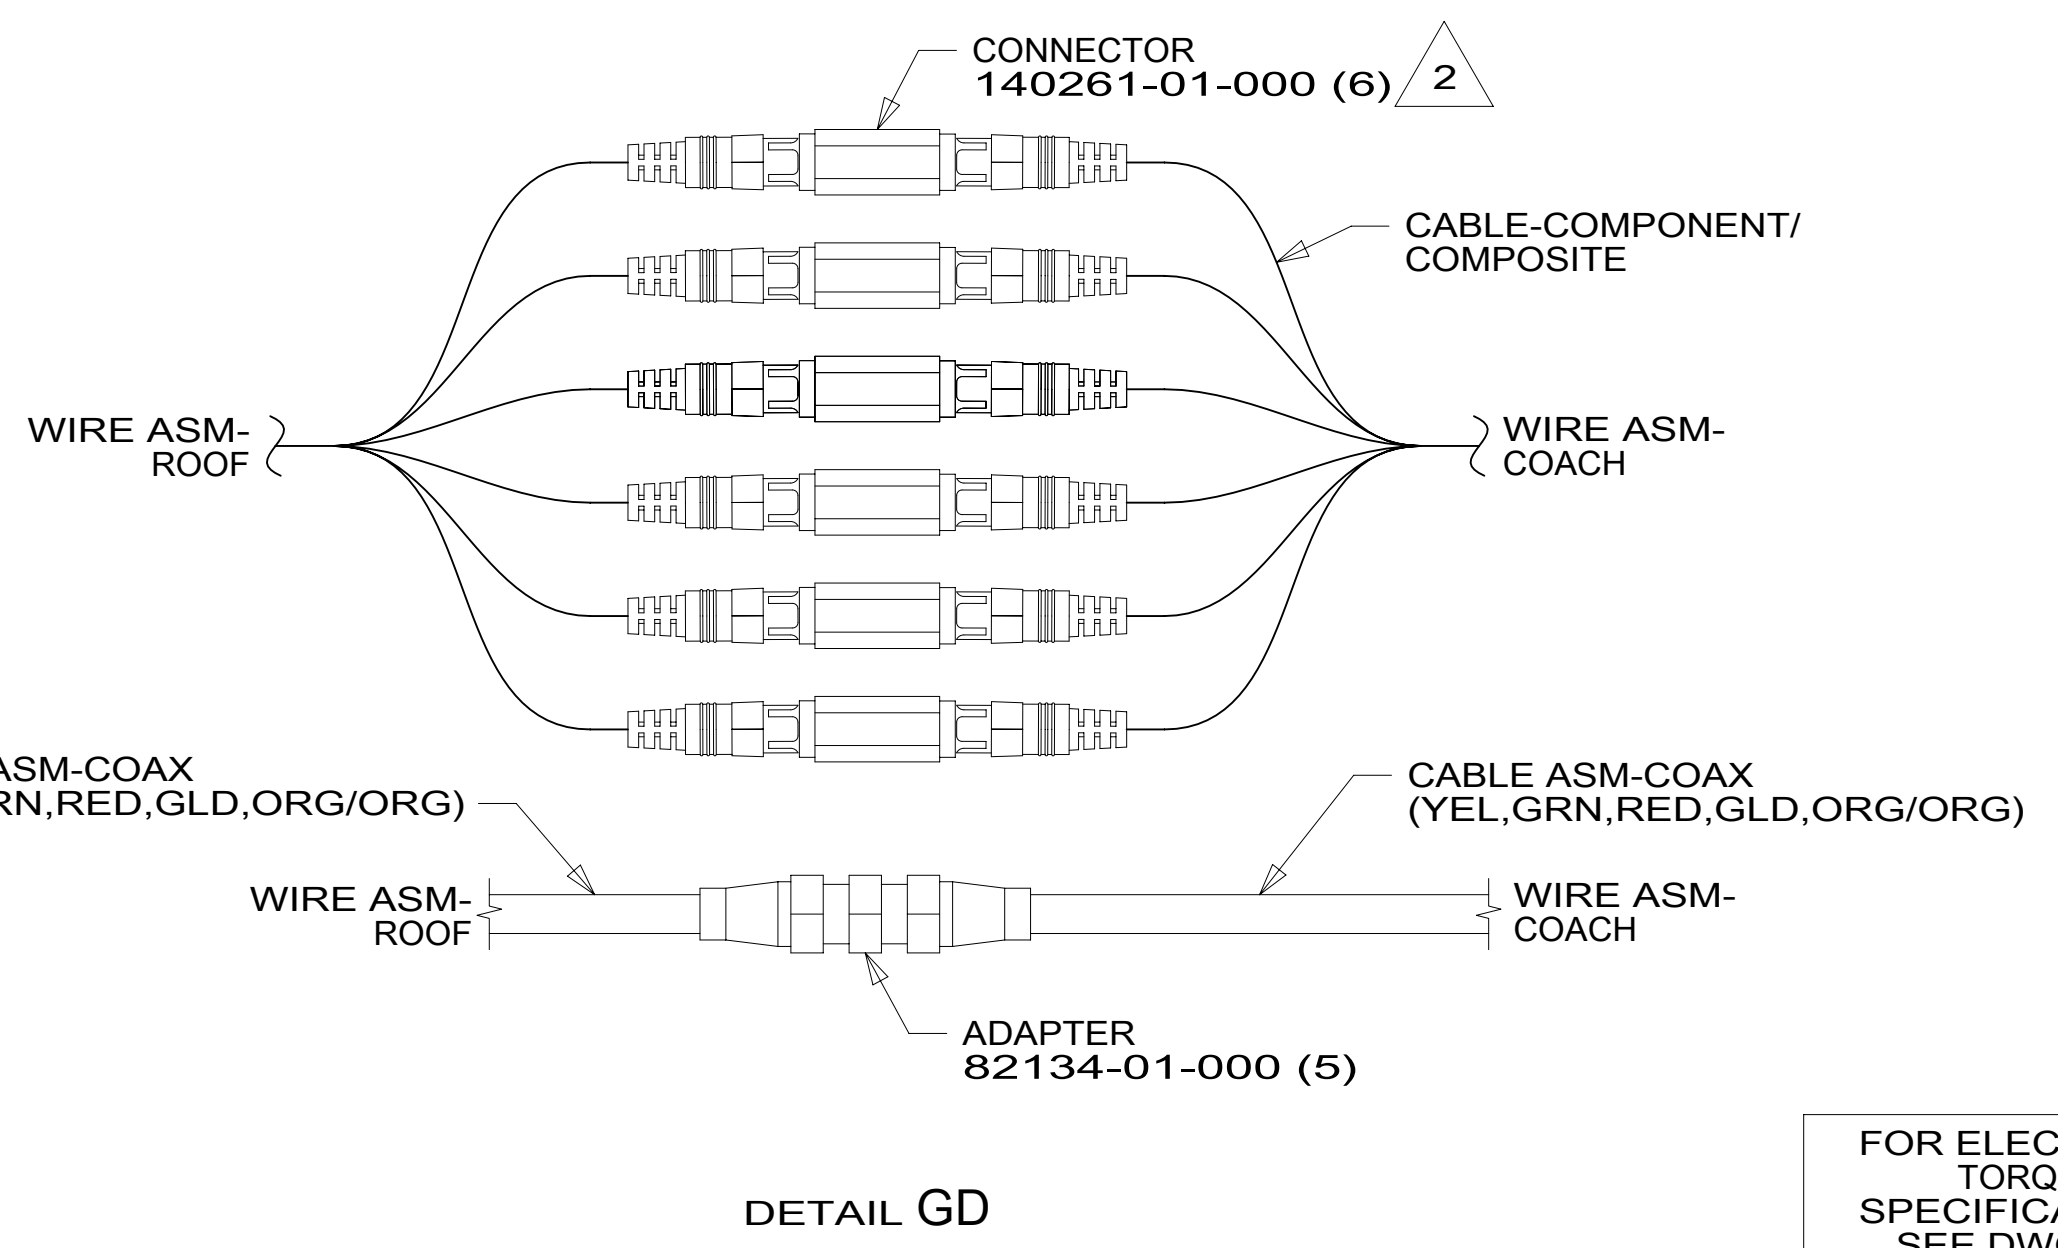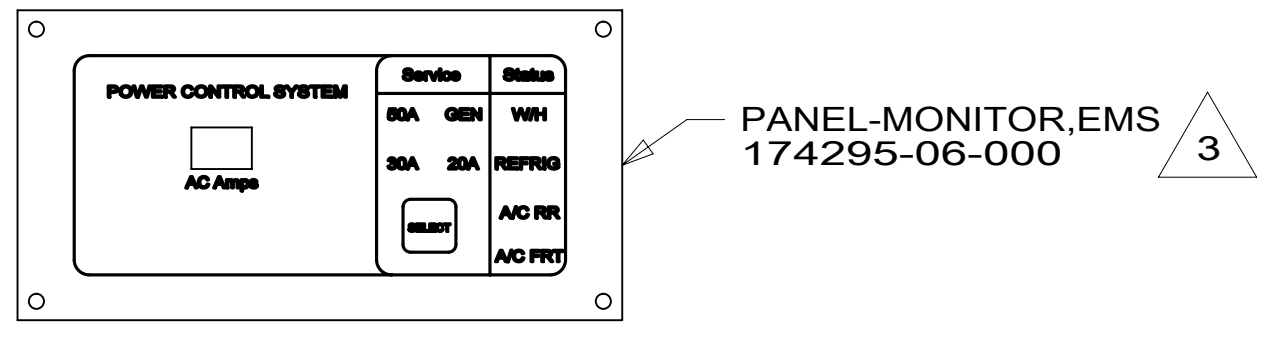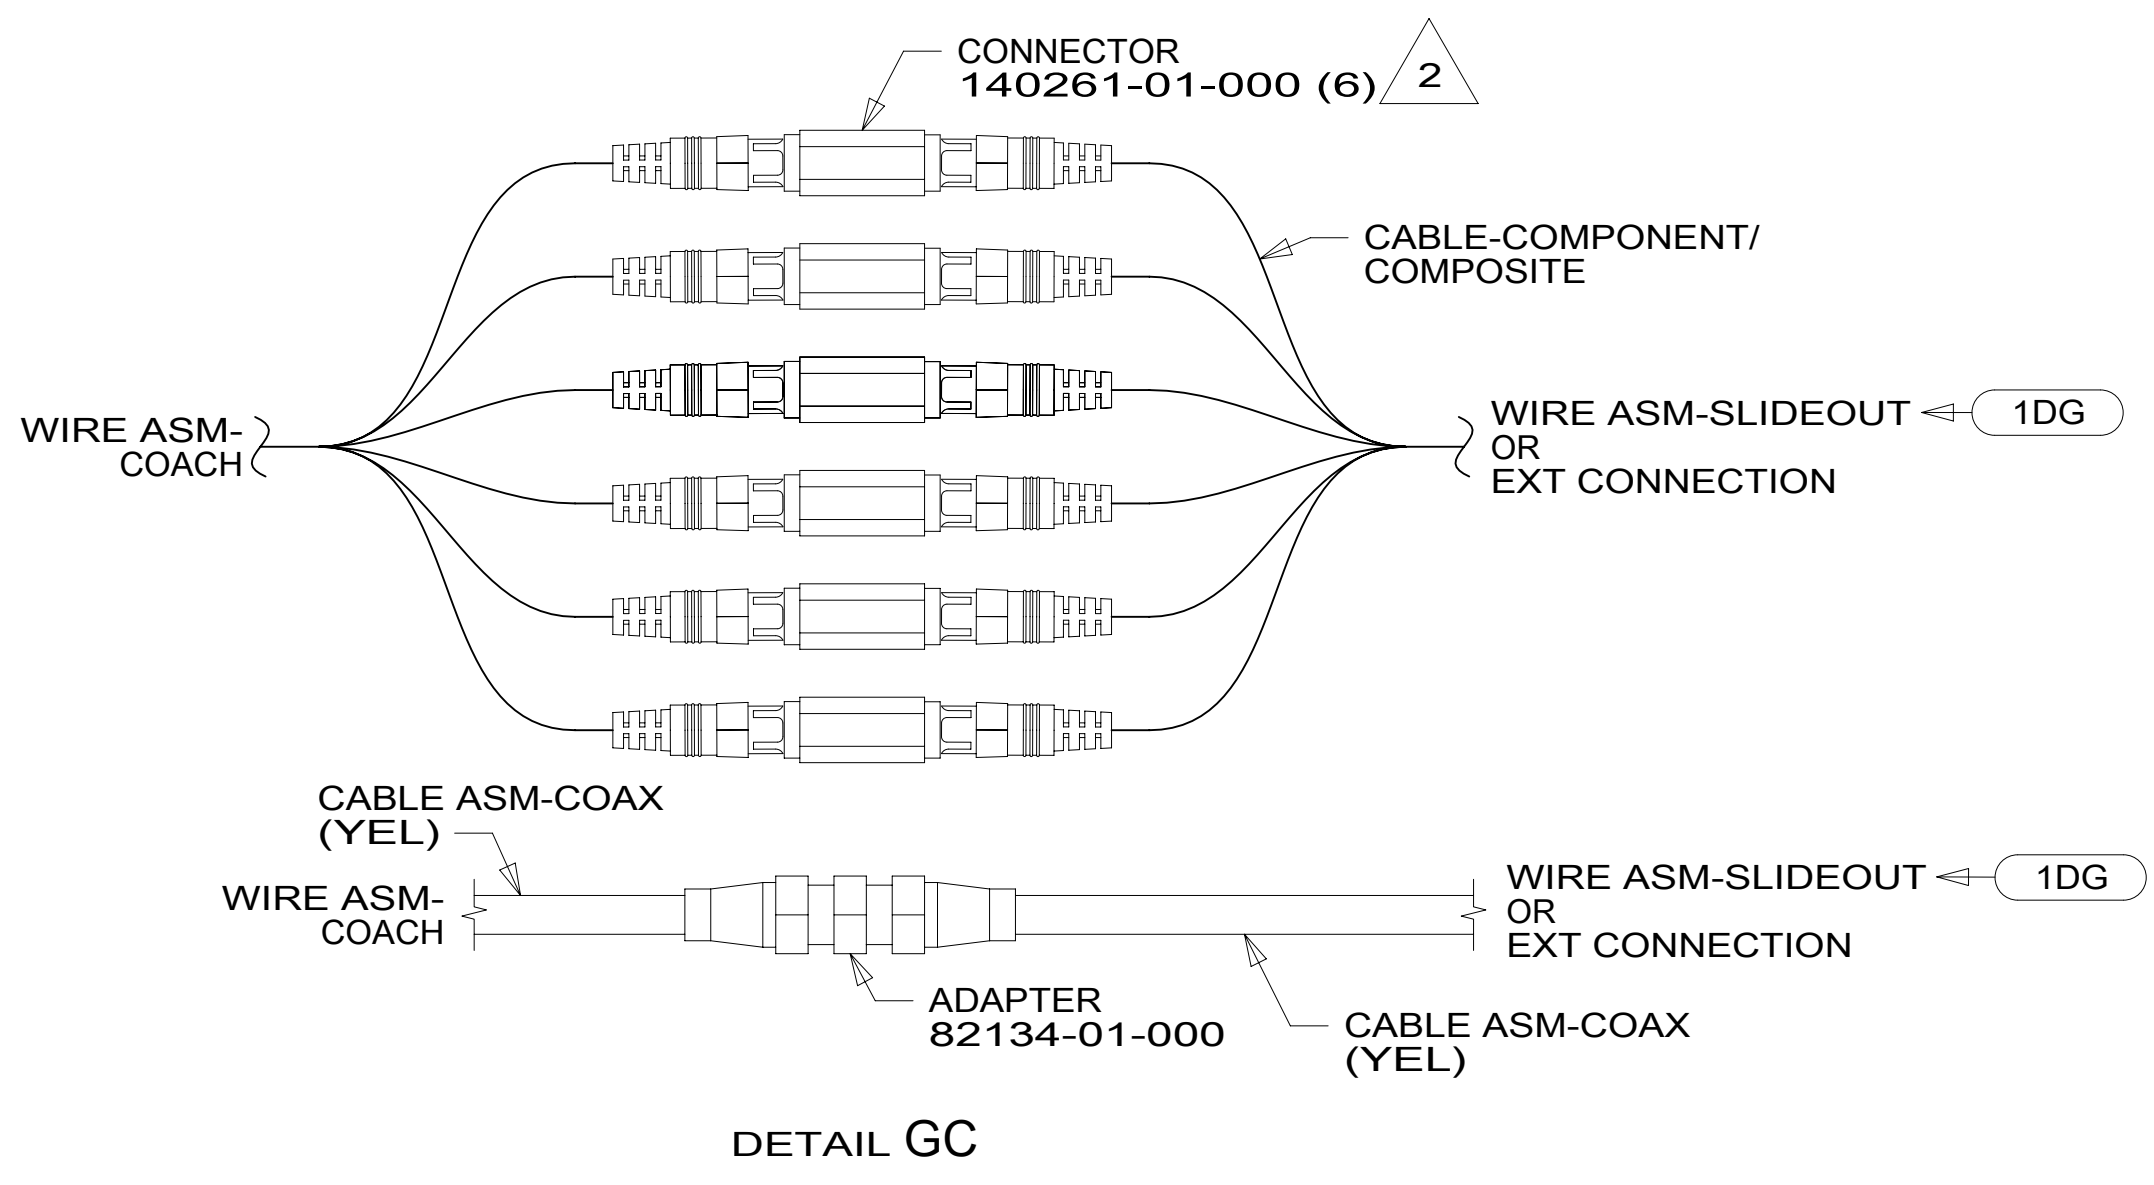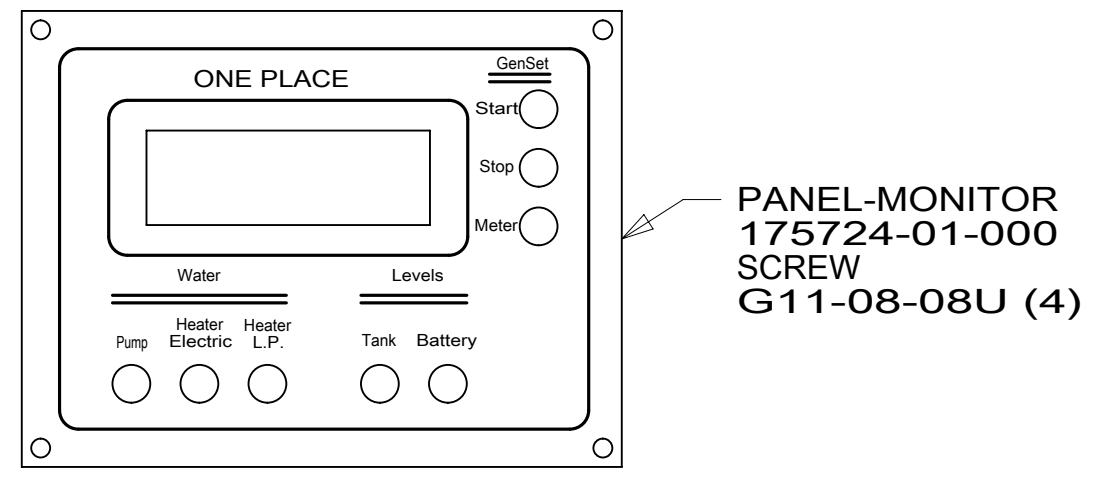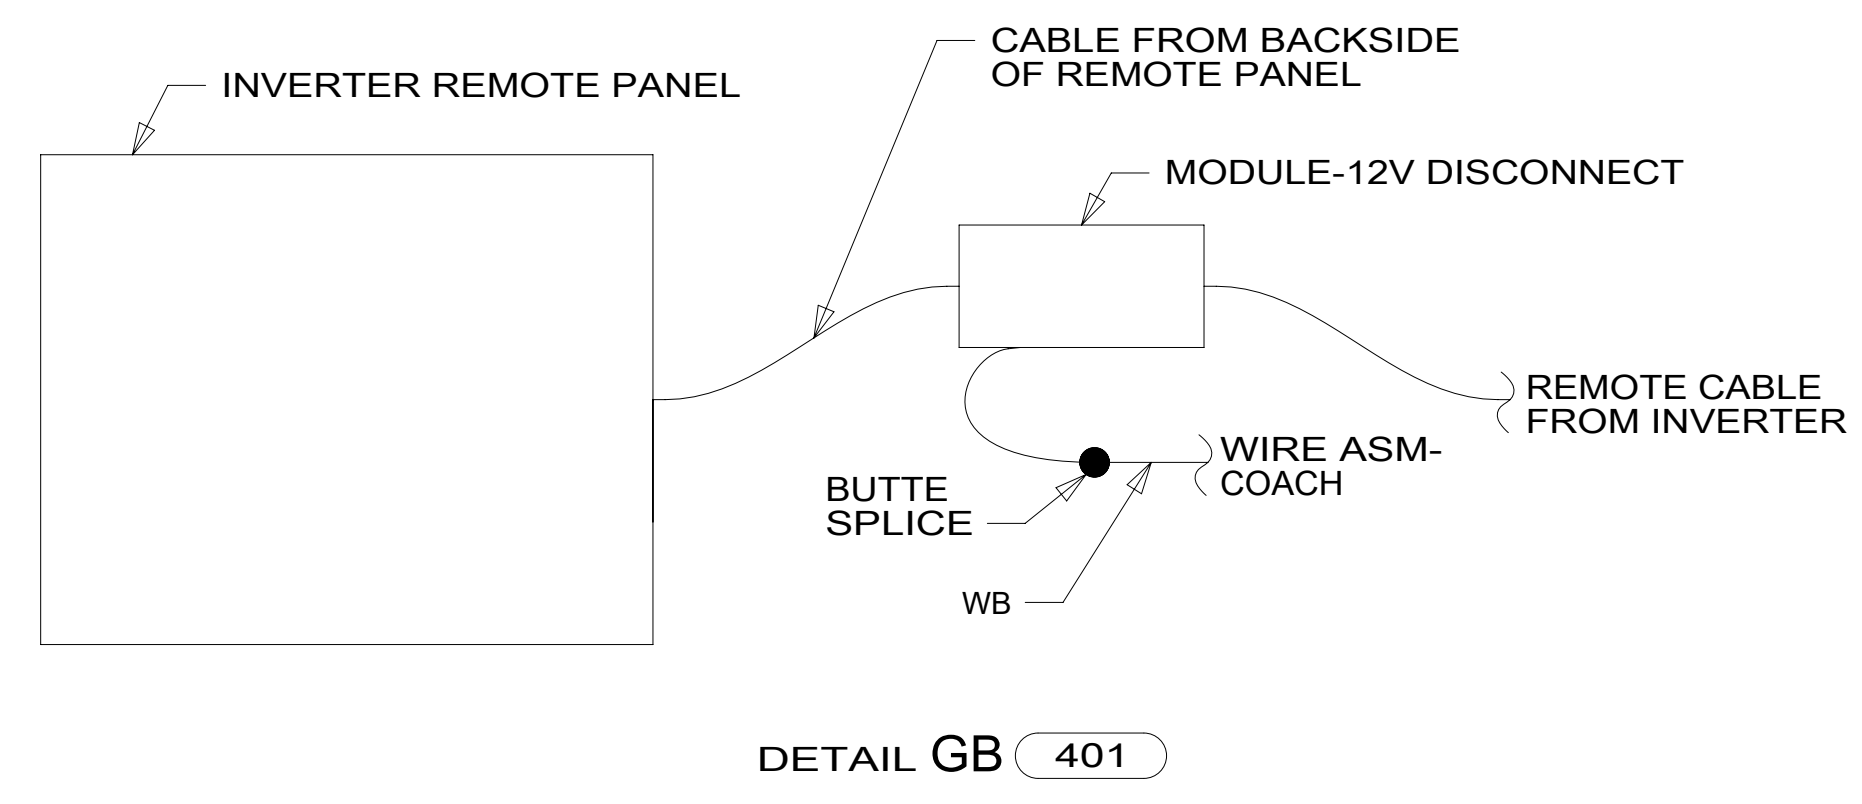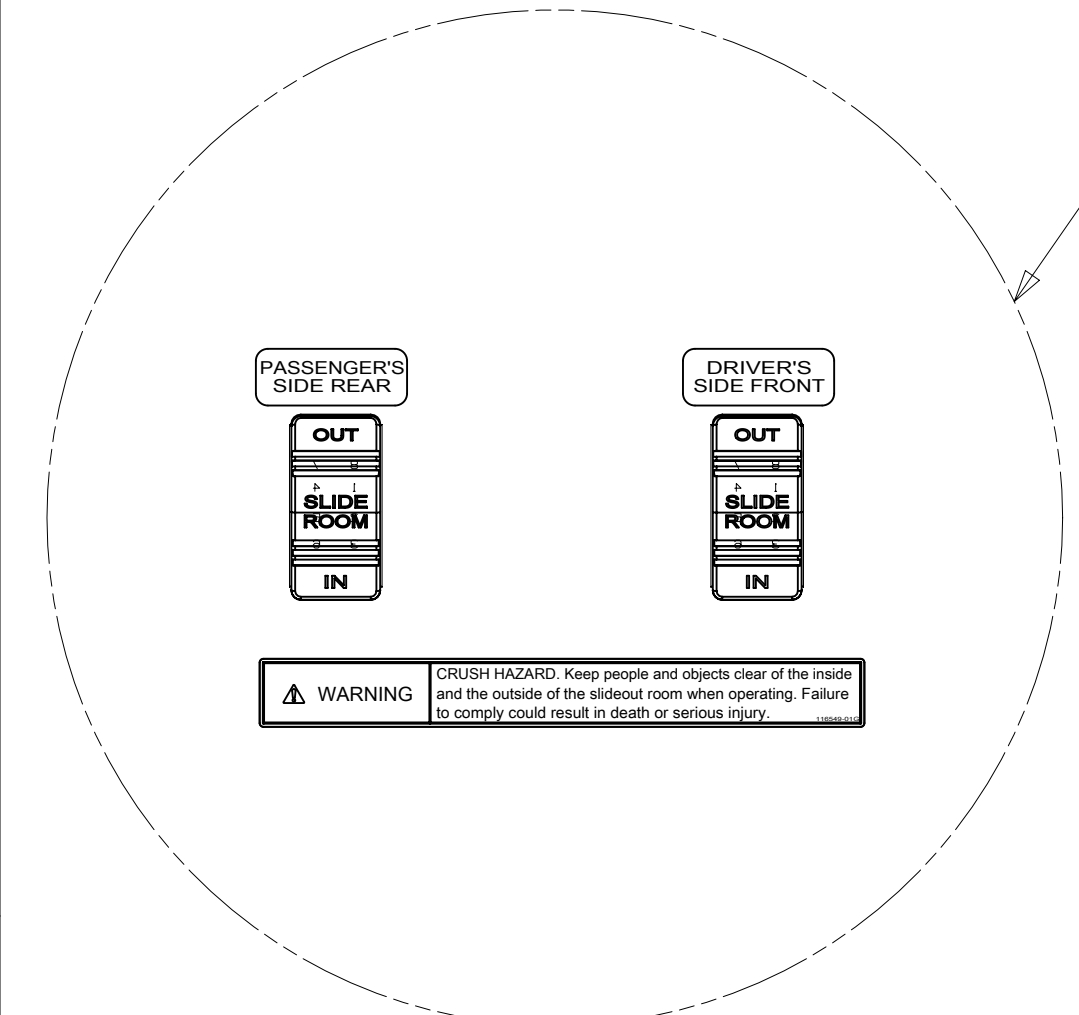

- NOTES:
- 3 DATA CABLE FOR EMS IS MARKED WITH RED TAPE.
  - 2 WRAP BOTH ENDS WITH TAPE 8363-01-000 TO SECURE CONNECTION.
  - 1 INSTALL GASKET ON BACK SIDE OF ONE PLACE AFTER INTALLATION OF THERMOSTAT,MAKE SURE THAT THE GASKET COVERS AND SEALS THE THAT THE WIRES PASS THROUGH.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 401 INVERTER-DC/AC, 1000 WATT
- 1DG EXT ENTERTAIN CTR W/TV & CD
- 29R AC HEAT PUMP-2 HI EFFICIENCY
- 276 A/C ROOF-HI EFF (2) W/EMS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED	<b>15 D30A</b>	
DO NOT SCALE DRAWING		
TITLE: <b>WIRING INSTL-BODY, 12V</b>		
SHEET 7	PART NO <b>188449</b>	REV
1 04-Feb-2015		

\* 188449 \*