



**DANGER**

**Danger of electrical shock, burns or death.** Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.




**CAUTION**

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

DRAWING NO.	FEATURE
189932-01	-----
189932-11	(1B1) (12D)
189932-15	(265) (12D)

RELEASE	REV/DATE	REV NO	DWG NO
			189932
REV ZONE	REVISION RECORD	DATE	DTR-016

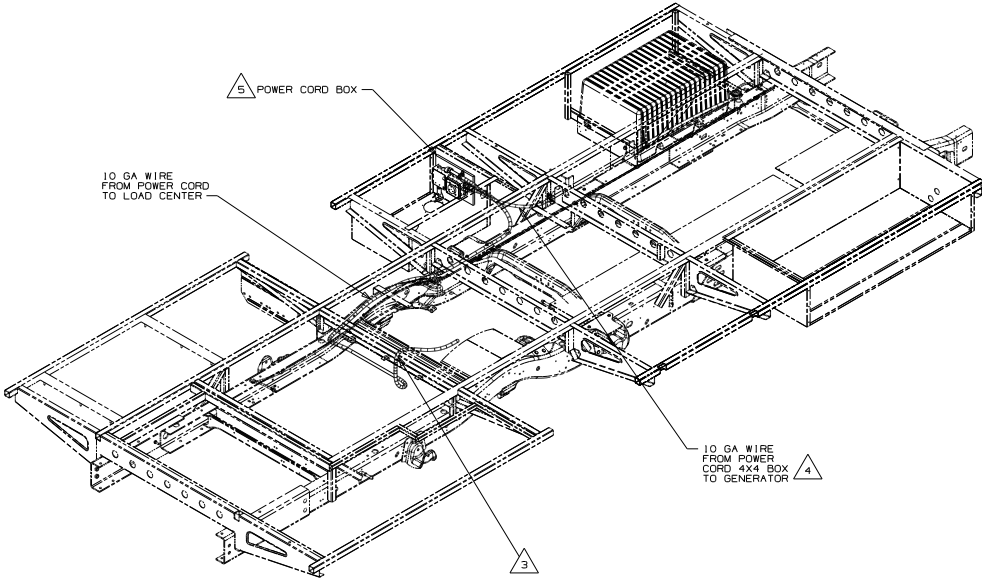


- (12D) ELECTRICAL SYSTEM 30 AMP
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA
- (1B1) (265)

<b>WINNEBAGO</b> INDUSTRIES, INC.		COPYRIGHT 2014 WINNEBAGO INDUSTRIES, INC.	
DATE	ORIG. DATE		
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS		
P.E.	FIRST USED		
W.E.	15 3258		
CDR			
UNSPECIFIED TOLERANCES ARE:		MATERIAL	
HOLES Ø16 (X)	± .3		
ONE-PLACE (X, X)	± 1.5		
TWO-PLACE (X, X)	± 0.50		
ANGLE	± .1°		
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING		REFER TO 850016 FOR FASTENER TIGHTENING GUIDELINES	
TITLE: WIRING INSTL-BODY, 110V		REV	
SHEET   OF 4		PART NO   189932	

- NOTES:
- 5 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
  - 4 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
  - 3 ROUTE WIRE THRU FLOOR.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
  1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE B343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

(X-X)  
FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

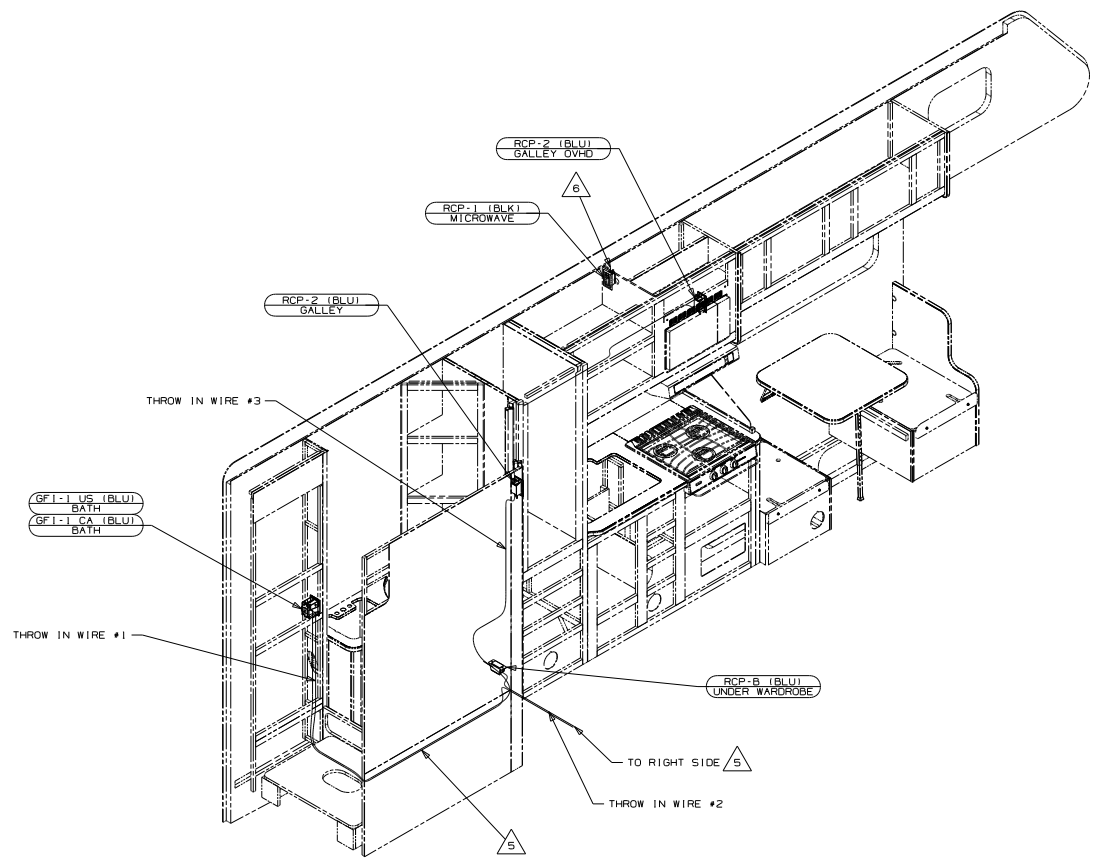

- △ 6 WIRE ROUTED IN ROOF.
- △ 5 ROUTE WIRE THRU FLOOR.

4. FOR MORE INFORMATION SEE WIRING DIAGRAM-BODY, 110V.
3. ALL GROUND WIRE TO BE COVERED WITH TUBING B041-02-000.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE B343 OR 10B046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS  
 1B1 CODES/STANDARDS USA


1B1 265

PART NOS		15 325B	
DO NOT SCALE DRAWING			
TITLE:		WIRING INSTL-BODY, 110V	
SHEET 2	PART NO	189932	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 1287B3-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000



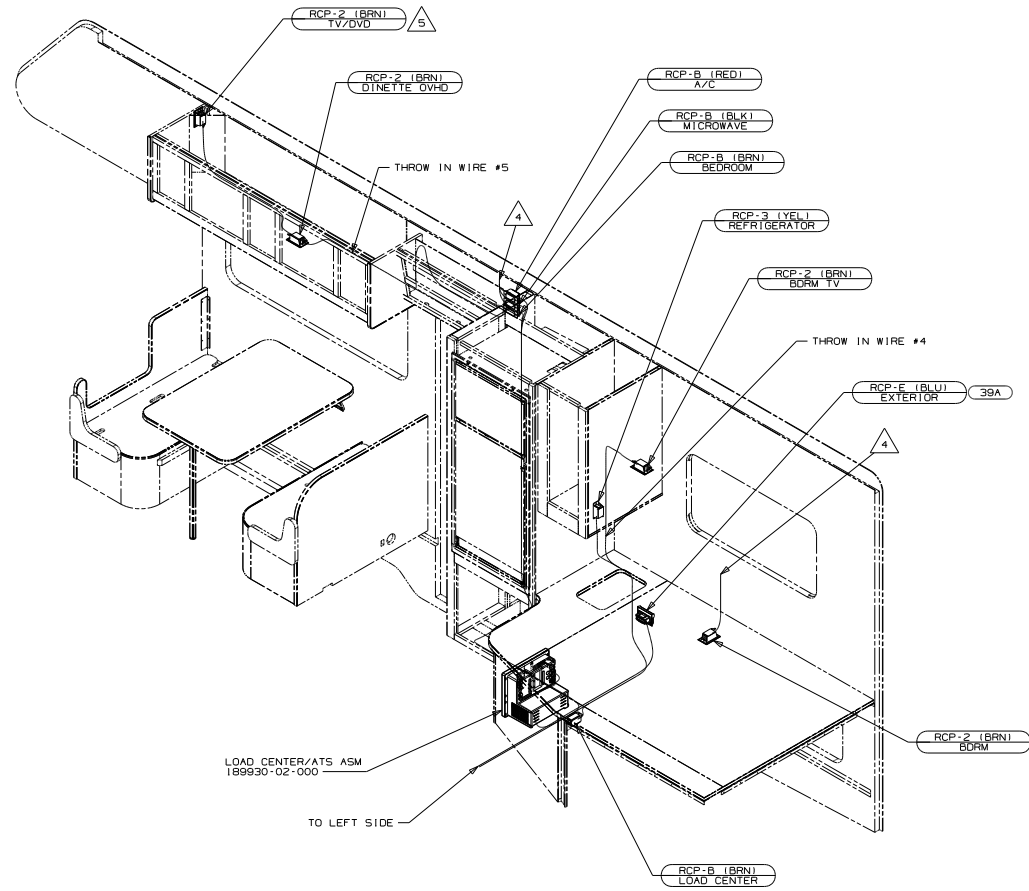

5 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.

4 WIRES IN ROOF.

3. ALL GROUND WIRE TO BE COVERED WITH TUBING B041-02-000.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE B343 OR 10B046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

- 39A EXT RECEPTACLE DPLX 120VAC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


1B1 265

PART NOS		15 325B	
DO NOT SCALE DRAWING			
TITLE:		WIRING INSTL-BODY,110V	
SHEET 3	PART NO	189932	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 1287B3-01-000

FOR ELECTRICAL CALLOUTS SPECIFICATIONS SEE DWG NO. 121339-01-000



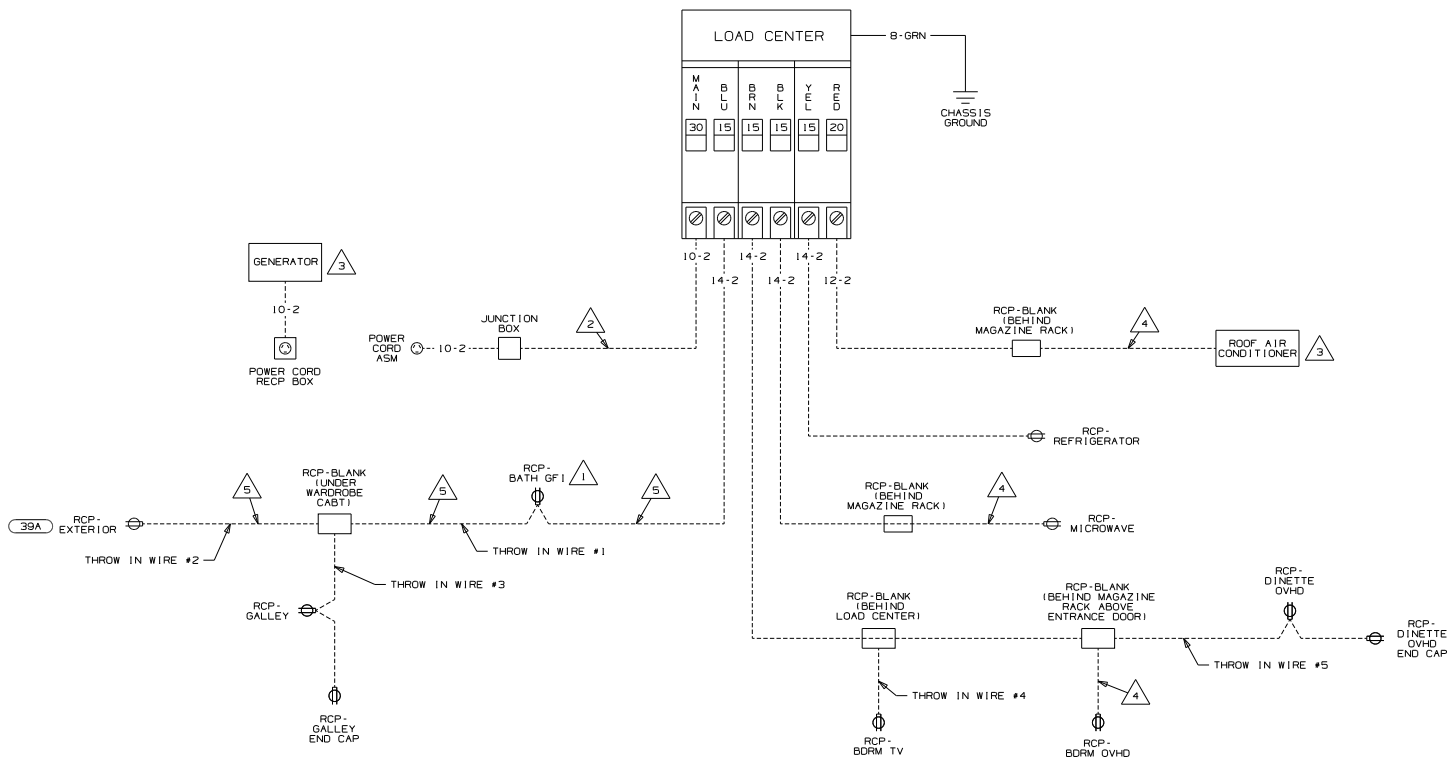

- 5 WIRE ROUTED IN FLOOR.
- 4 WIRE ROUTED THRU ROOF.
- 3 SEE MANUFACTURERS DIAGRAM.
- 2 WIRE ROUTED BELOW FLOOR.
- 1 ALL OUTLETS DOWN STREAM AND INCLUDING THIS OUTLET ARE GROUND FAULT INTERRUPT PROTECTED.

NOTES:

- 39A EXT RECEPTACLE DPLX 120VAC
- 265 CODES/STANDARDS - CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		15 325B	
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-BODY, 110V			
SHEET 4	PART NO	189932	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000