


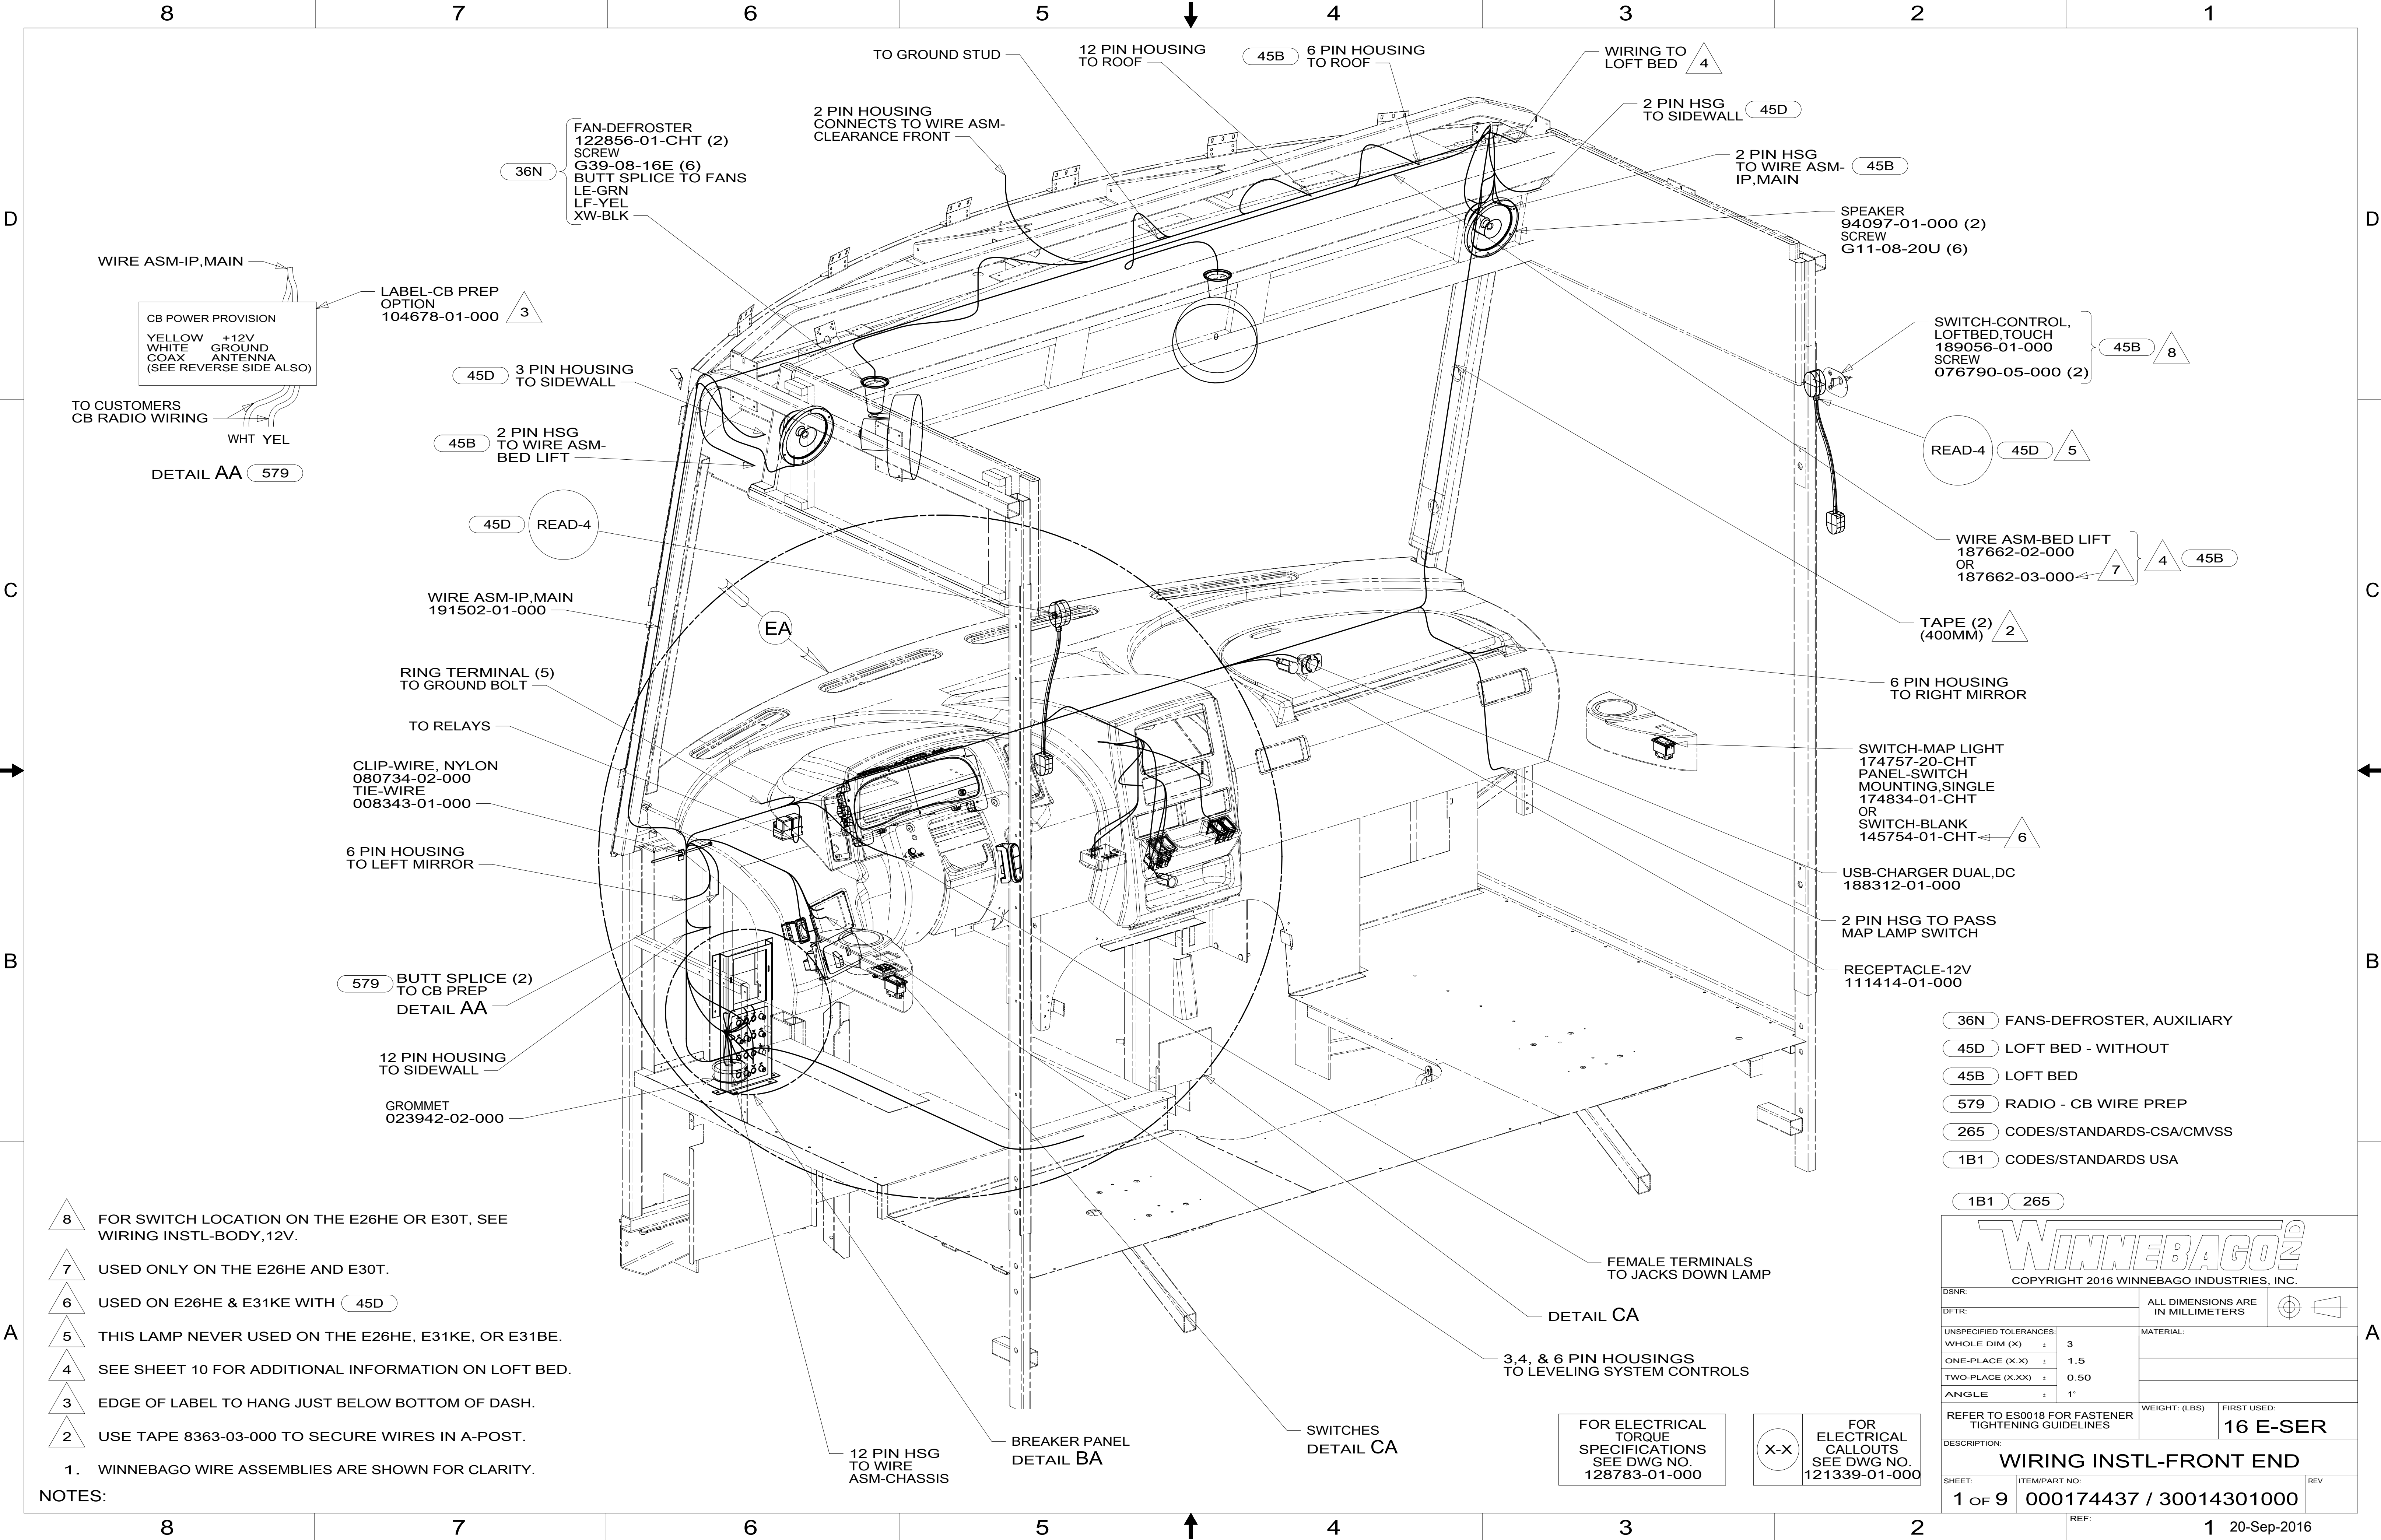

- 8 FOR SWITCH LOCATION ON THE E26HE OR E30T, SEE WIRING INSTL-BODY,12V.
- 7 USED ONLY ON THE E26HE AND E30T.
- 6 USED ON E26HE & E31KE WITH 45D
- 5 THIS LAMP NEVER USED ON THE E26HE, E31KE, OR E31BE.
- 4 SEE SHEET 10 FOR ADDITIONAL INFORMATION ON LOFT BED.
- 3 EDGE OF LABEL TO HANG JUST BELOW BOTTOM OF DASH.
- 2 USE TAPE 8363-03-000 TO SECURE WIRES IN A-POST.




NOTES:
1. WINNEBAGO WIRE ASSEMBLIES ARE SHOWN FOR CLARITY.

- 36N FANS-DEFROSTER, AUXILIARY
- 45D LOFT BED - WITHOUT
- 45B LOFT BED
- 579 RADIO - CB WIRE PREP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1		265	
WINNEBAGO[®] COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.			
DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFTR:		 	
UNSPECIFIED TOLERANCES:		MATERIAL:	
WHOLE DIM (X) ±		3	
ONE-PLACE (X.X) ±		1.5	
TWO-PLACE (X.XX) ±		0.50	
ANGLE ±		1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			16 E-SER
DESCRIPTION: WIRING INSTL-FRONT END			
SHEET:	ITEM/PART NO:		REV
1 OF 9	000174437 / 30014301000		

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

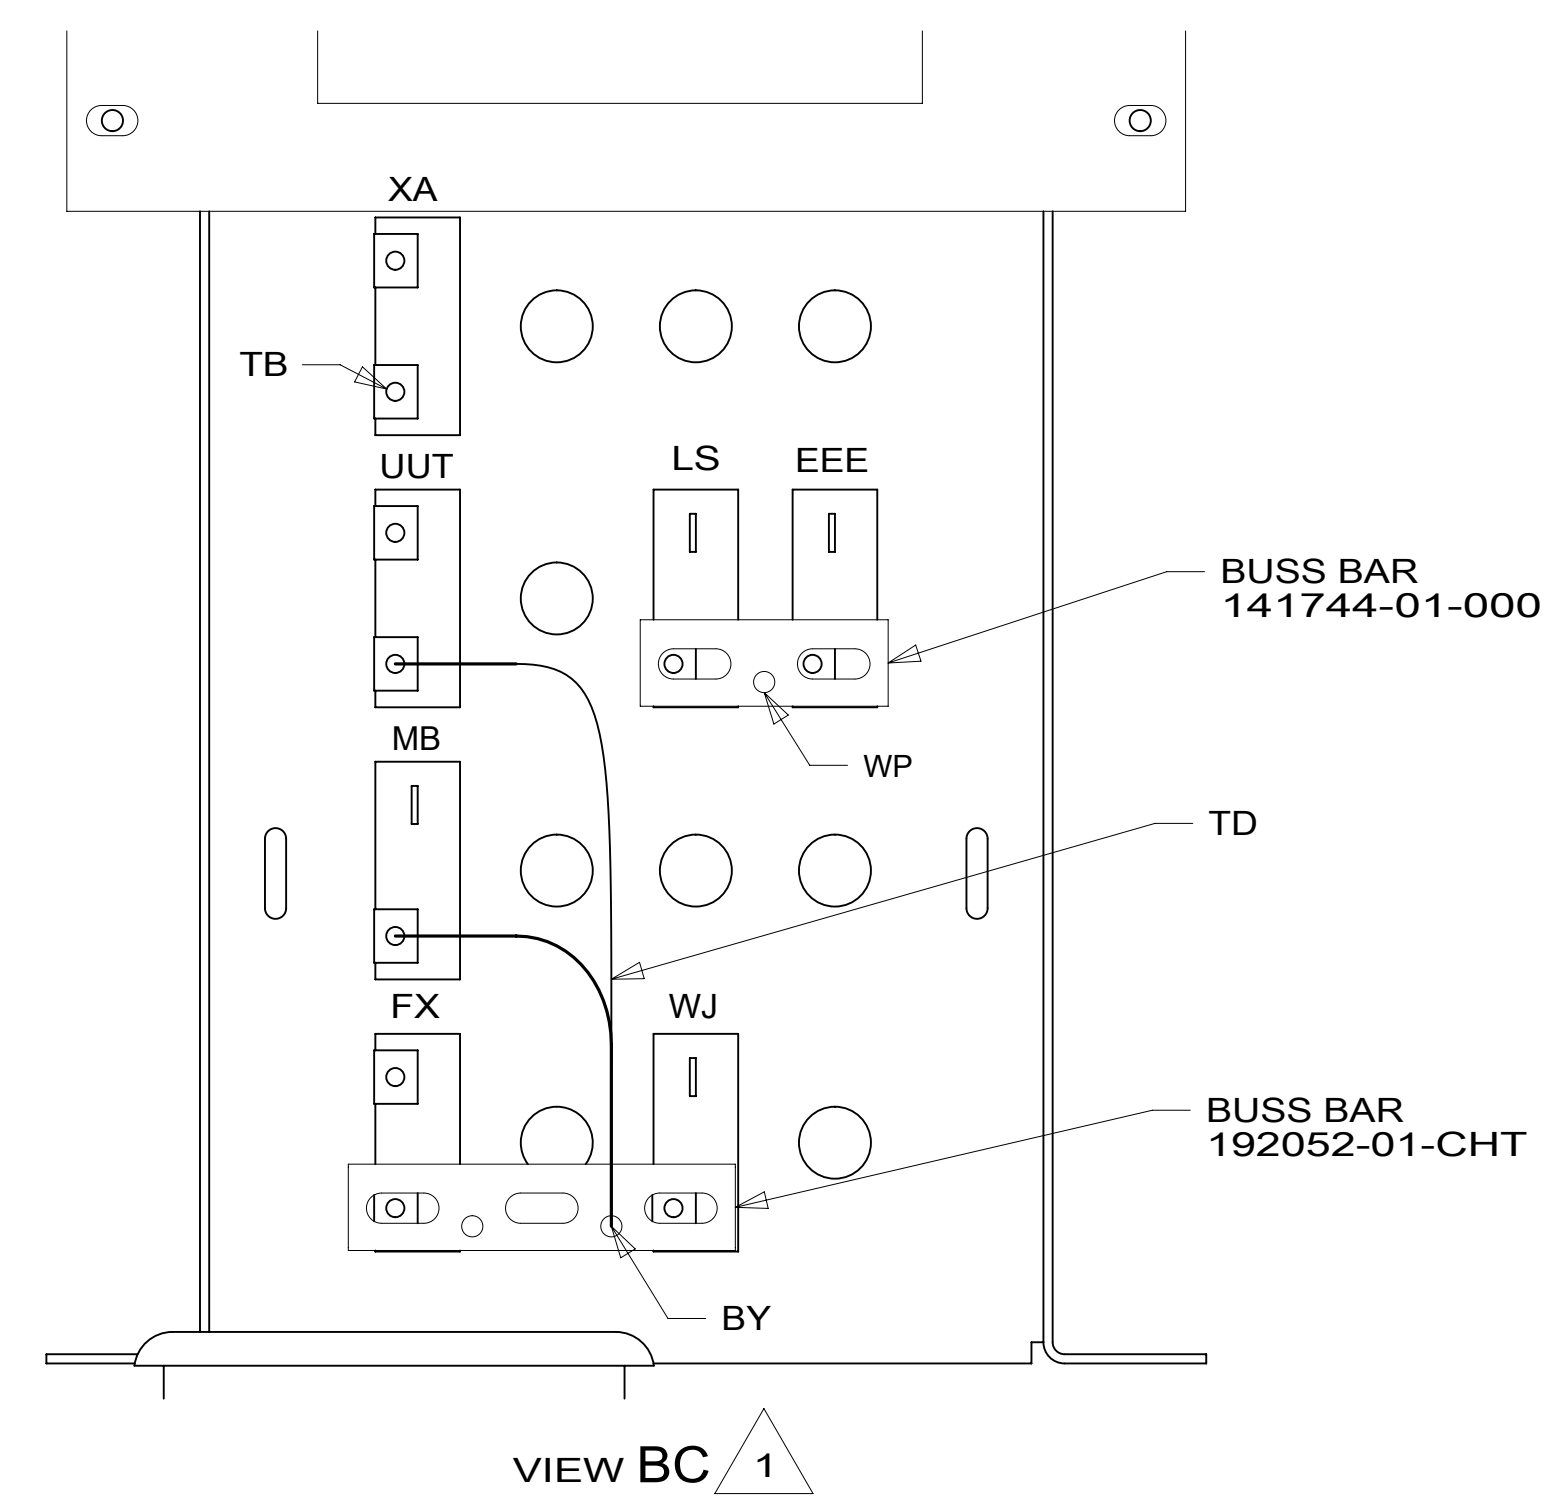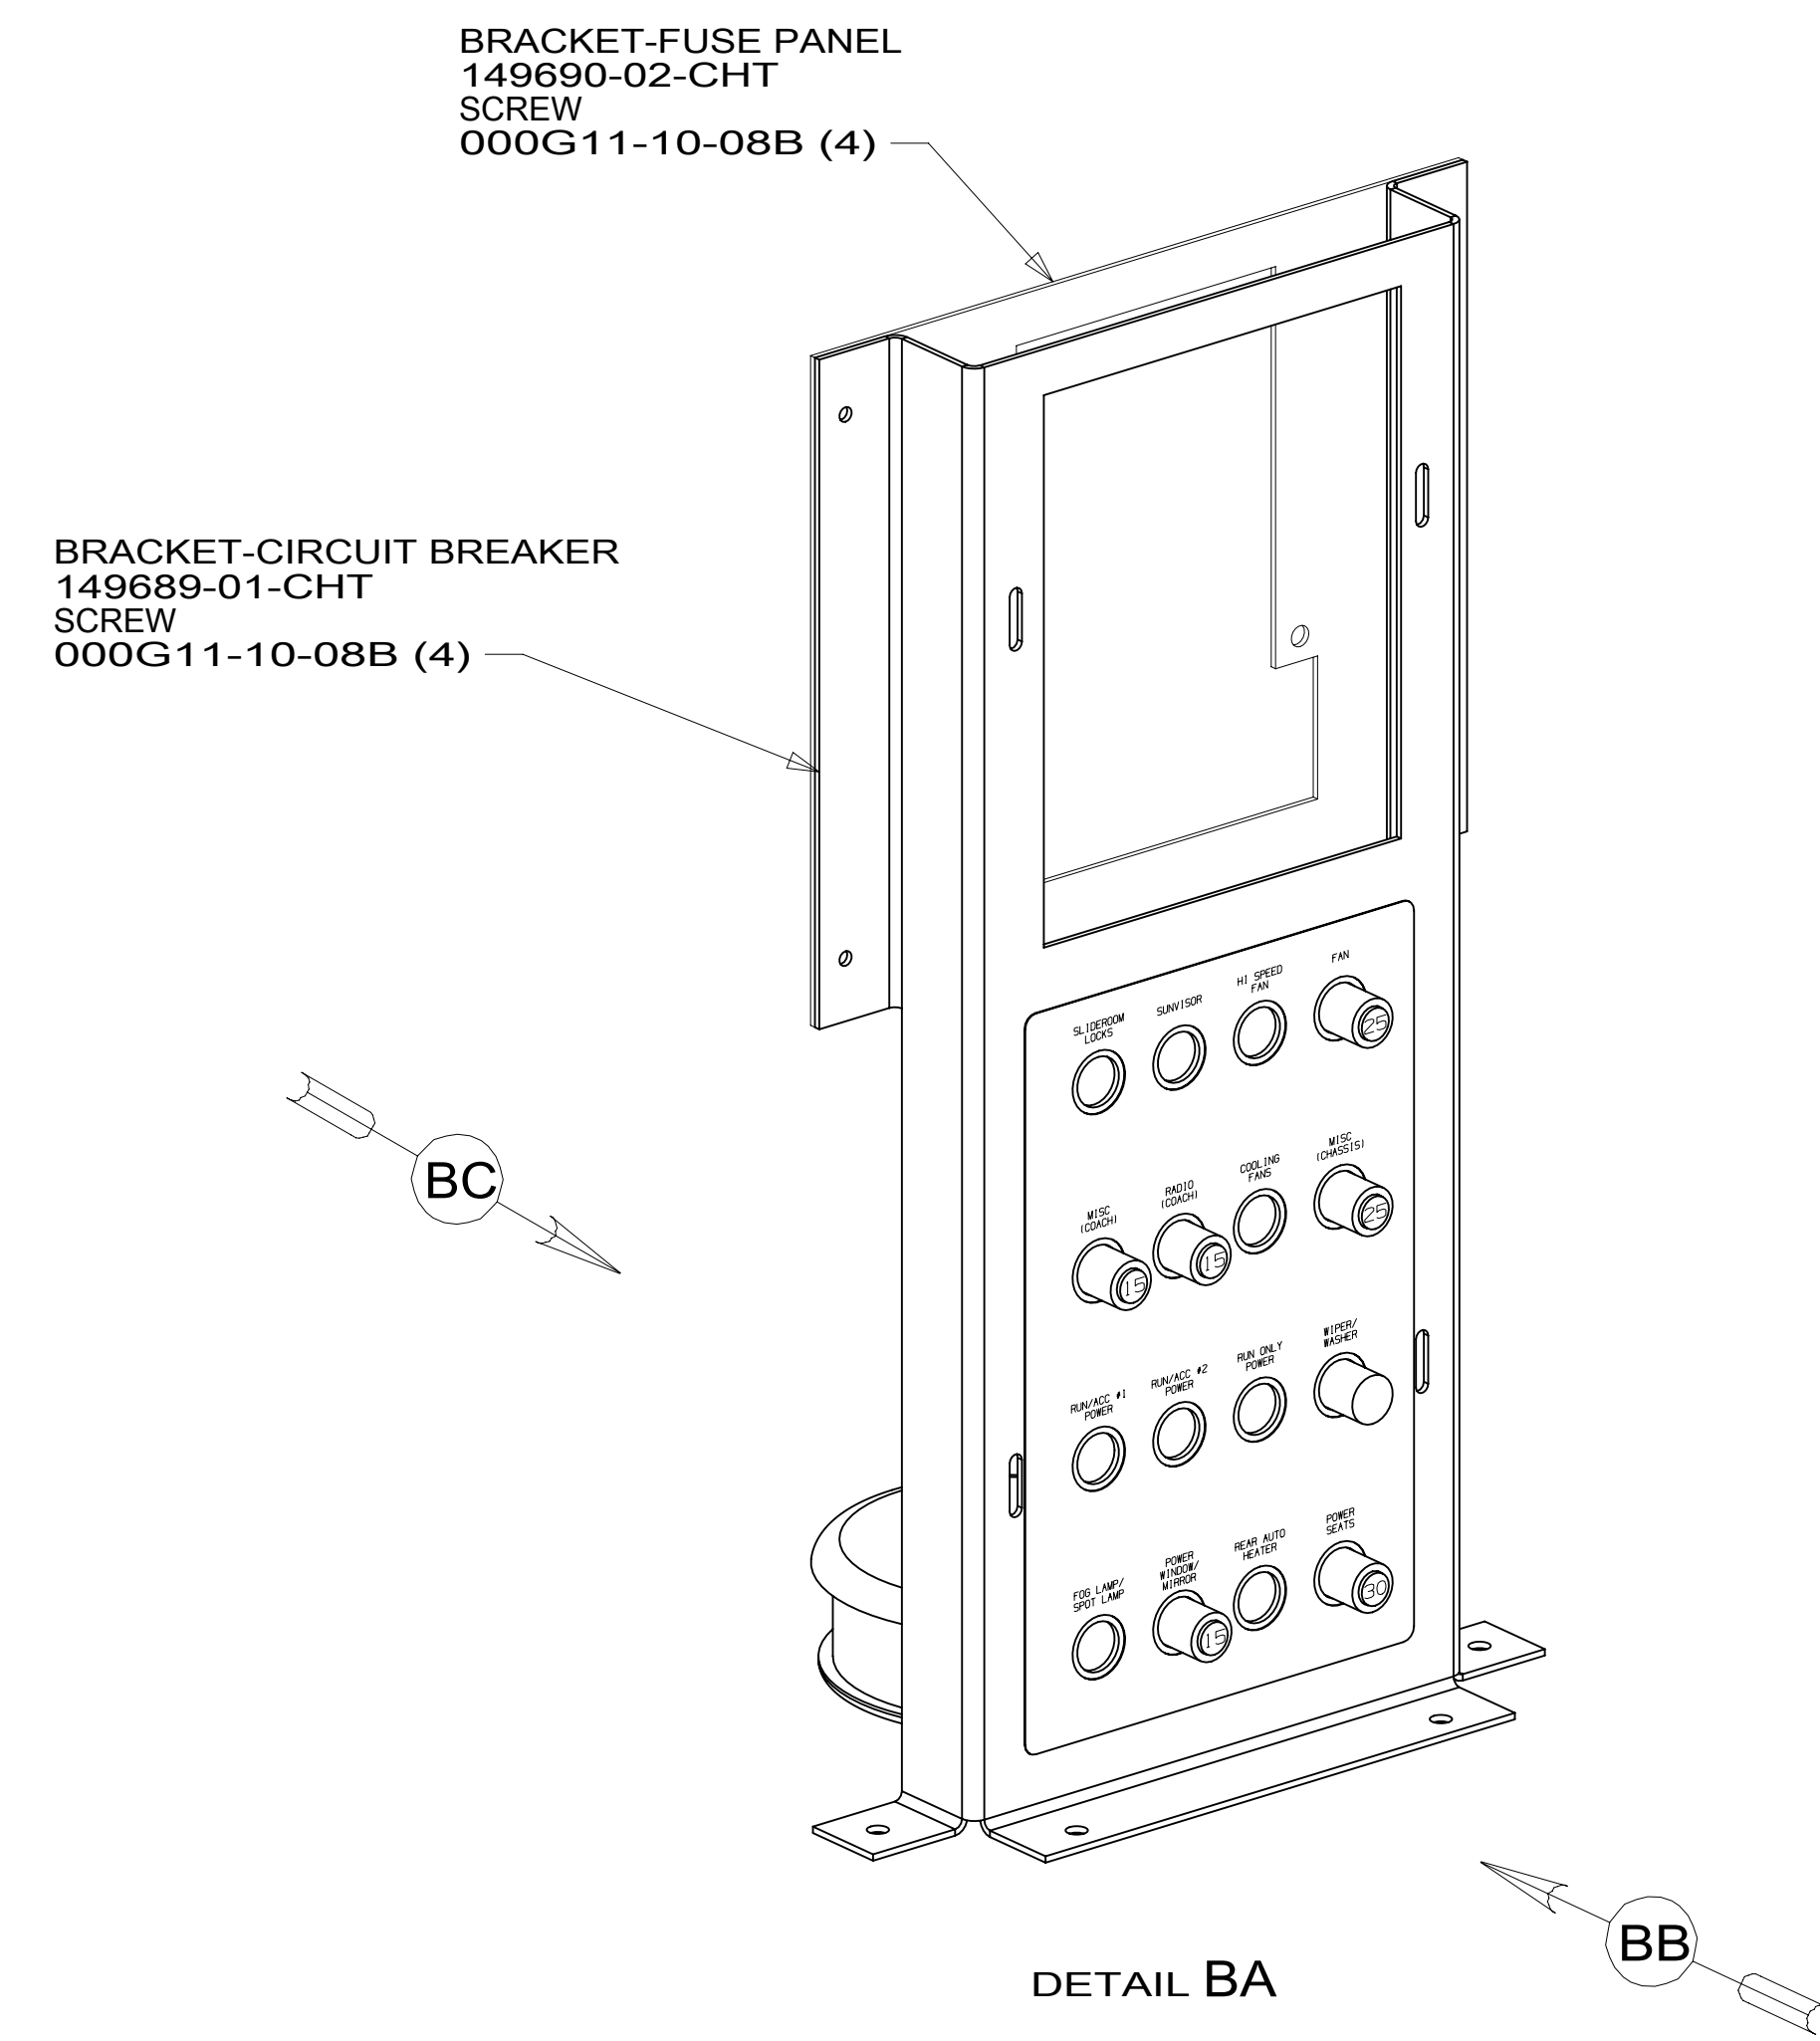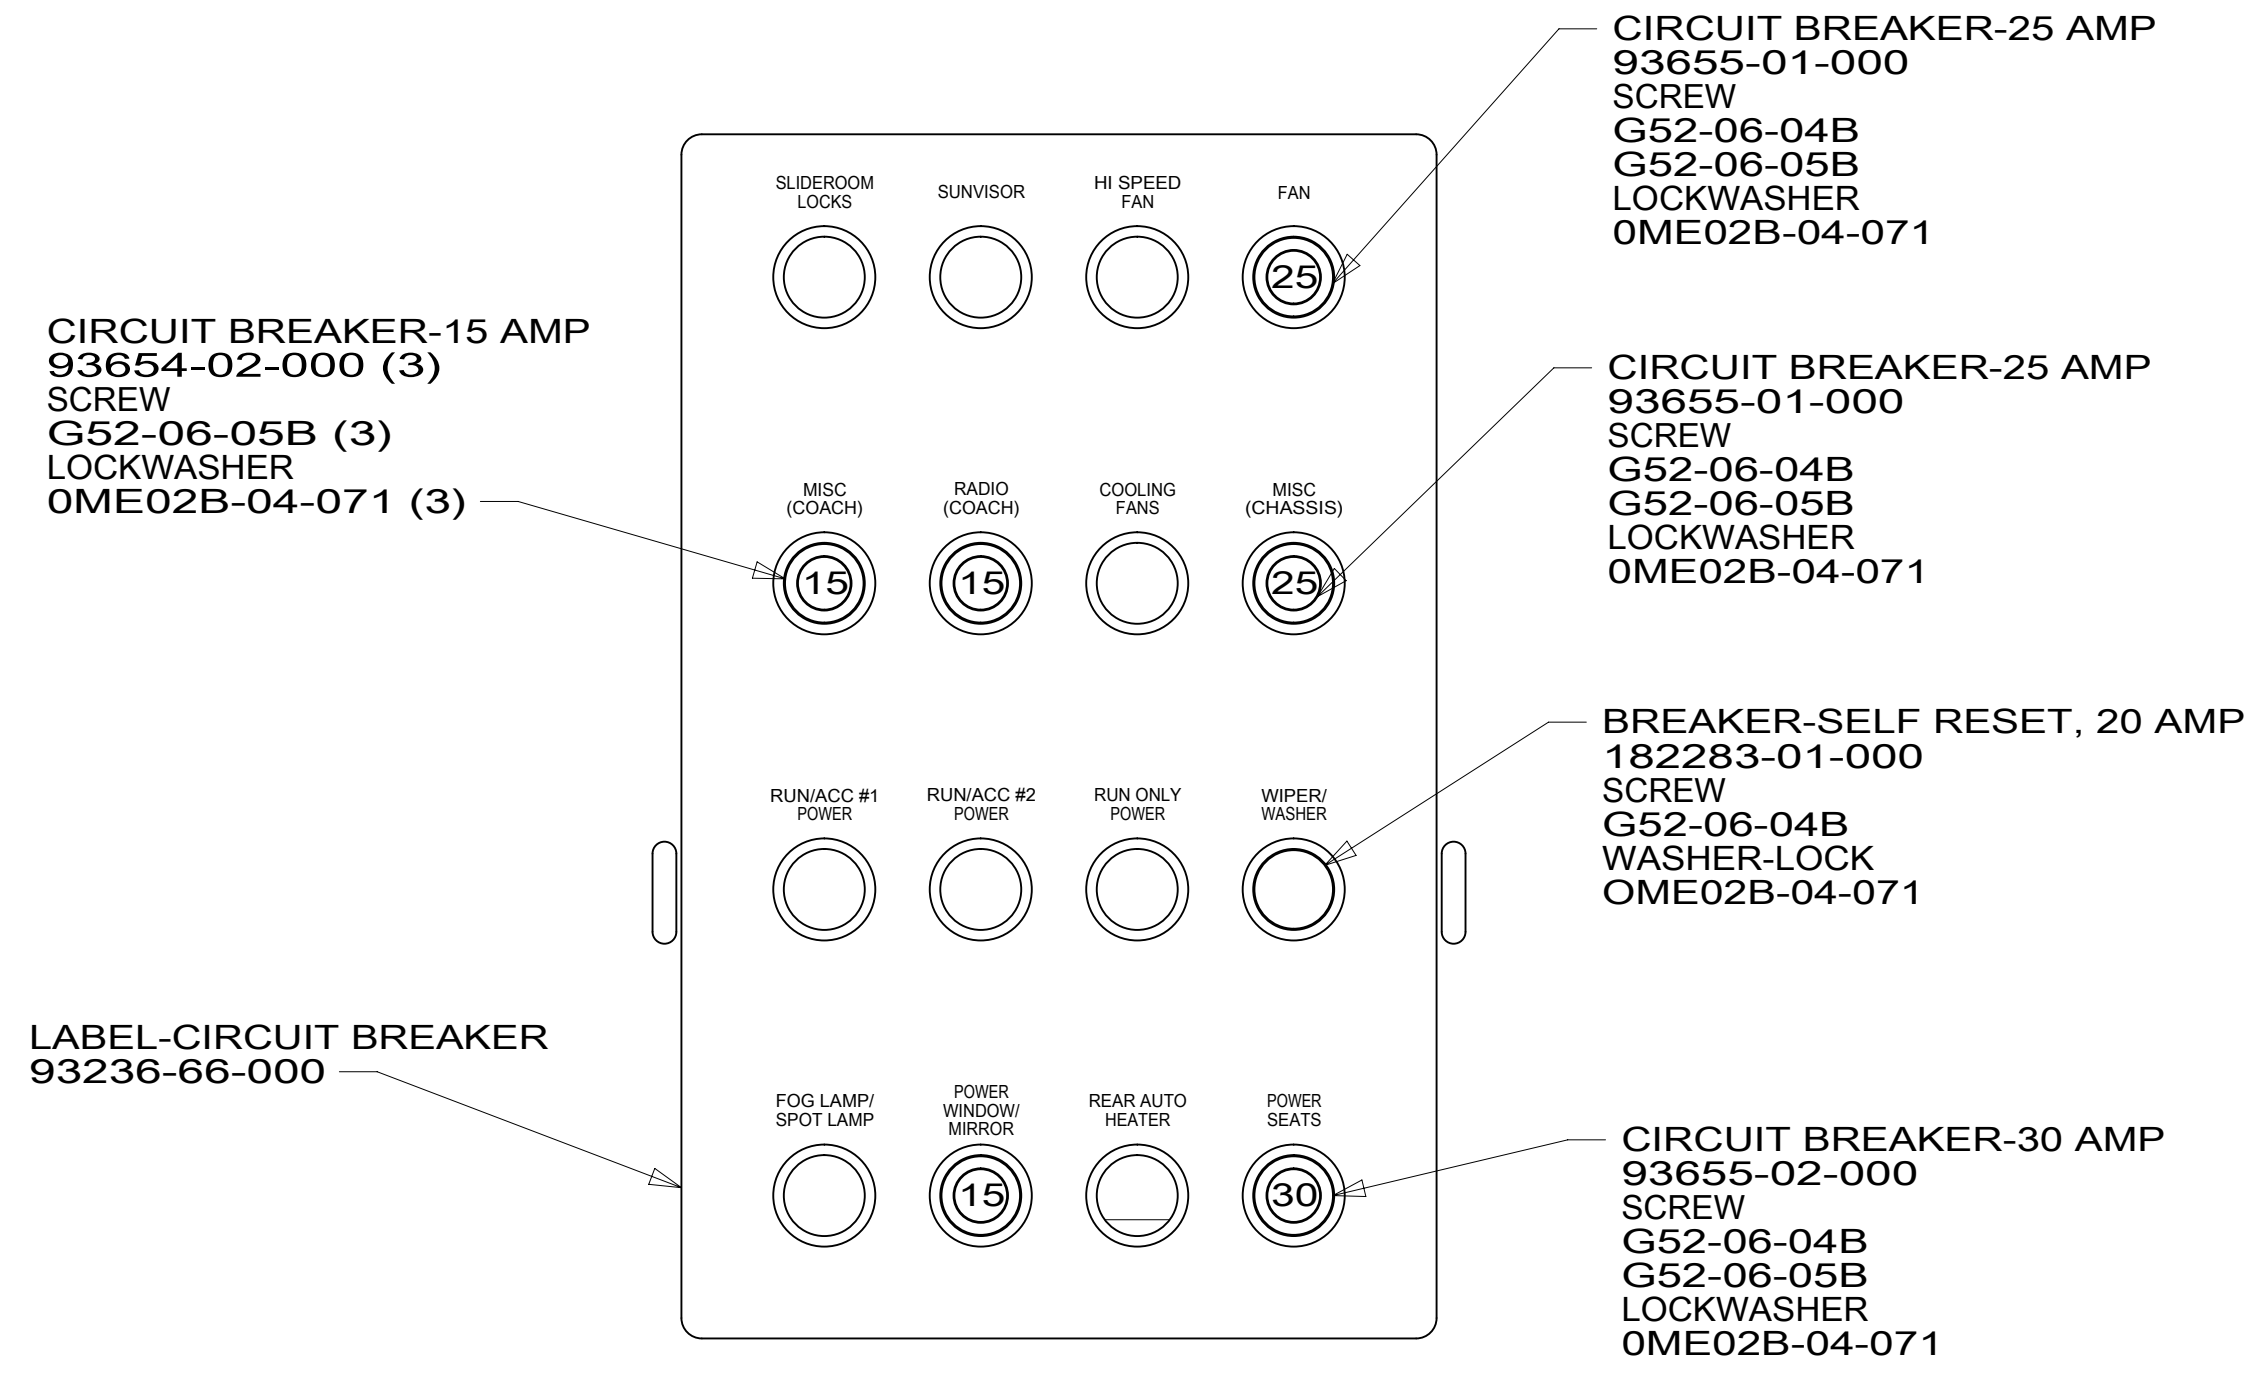


1 ALL CIRCUITS ARE IN WIRE ASM-IP,MAIN.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	---

265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265
DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO:
2 OF 9	000174437 / 30014301000
	1 20-Sep-2016

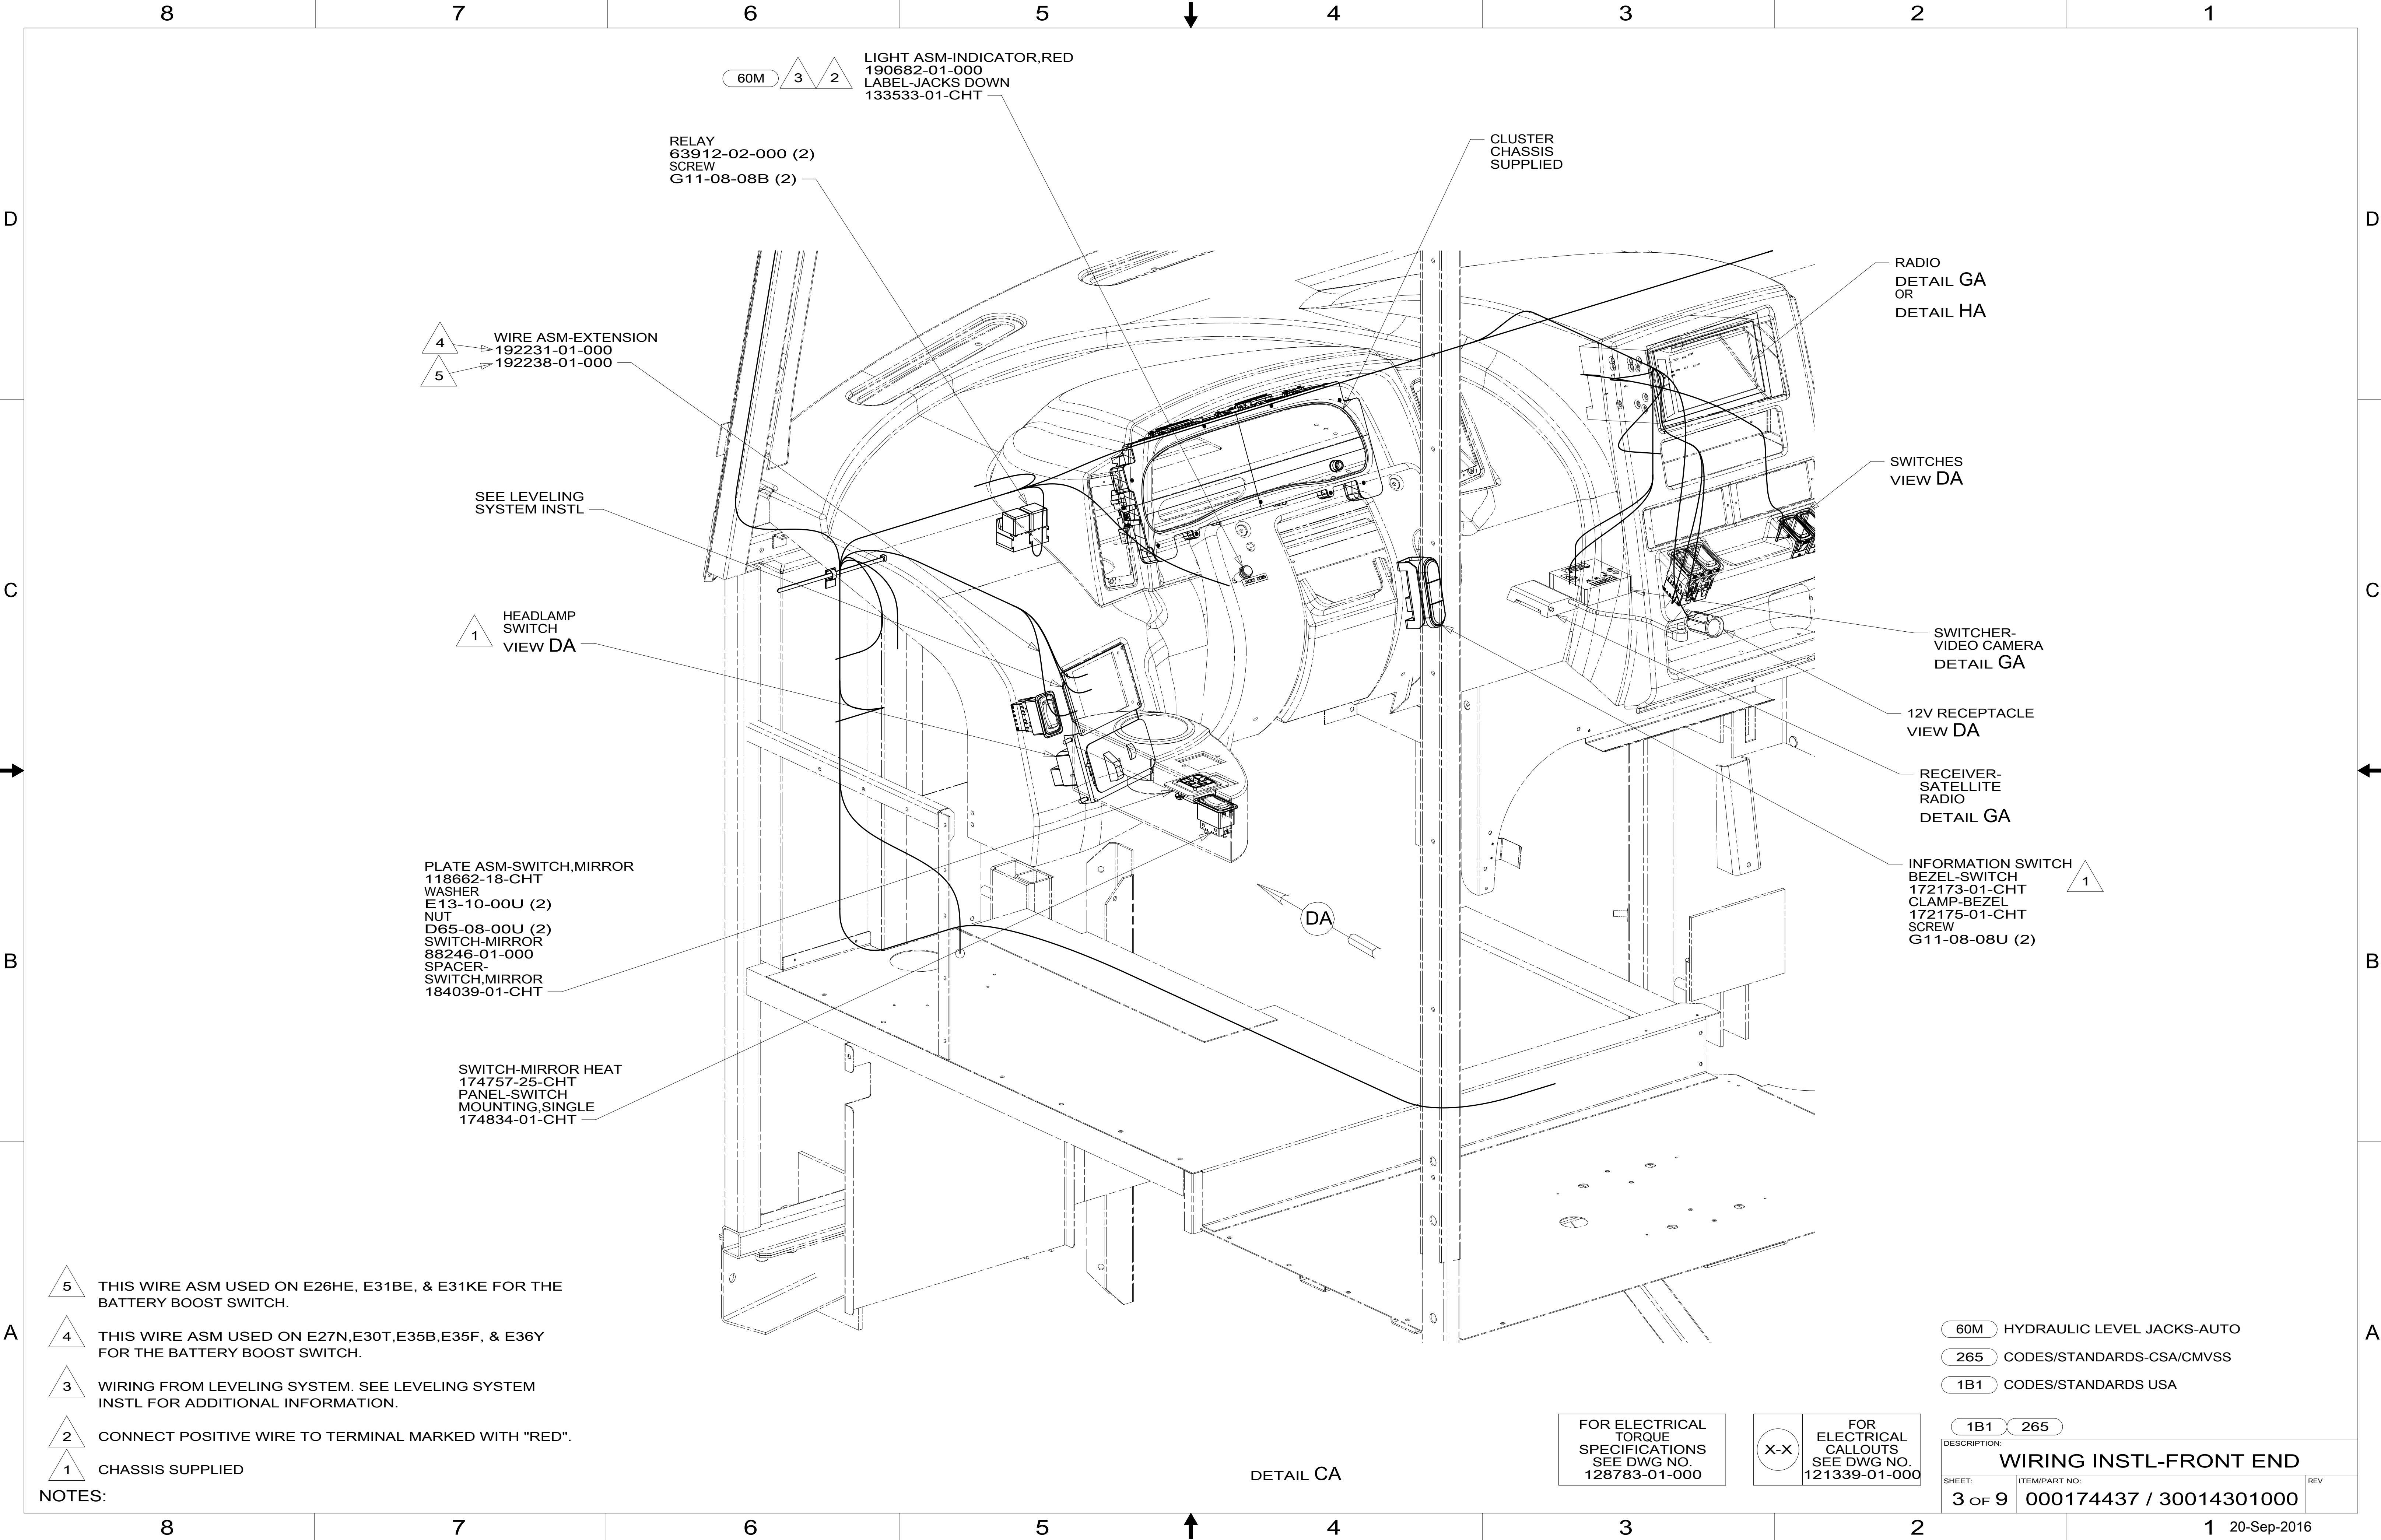

60M 3 2 LIGHT ASM-INDICATOR,RED
190682-01-000
LABEL-JACKS DOWN
133533-01-CHT

RELAY
63912-02-000 (2)
SCREW
G11-08-08B (2)

CLUSTER
CHASSIS
SUPPLIED

RADIO
DETAIL GA
OR
DETAIL HA

SWITCHES
VIEW DA

SWITCHER-
VIDEO CAMERA
DETAIL GA

12V RECEPTACLE
VIEW DA

RECEIVER-
SATELLITE
RADIO
DETAIL GA

INFORMATION SWITCH
BEZEL-SWITCH
172173-01-CHT
CLAMP-BEZEL
172175-01-CHT
SCREW
G11-08-08U (2)

1

SEE LEVELING
SYSTEM INSTL

HEADLAMP
SWITCH
VIEW DA

1

WIRE ASM-EXTENSION
192231-01-000
192238-01-000

4 5

PLATE ASM-SWITCH,MIRROR
118662-18-CHT
WASHER
E13-10-00U (2)
NUT
D65-08-00U (2)
SWITCH-MIRROR
88246-01-000
SPACER-
SWITCH,MIRROR
184039-01-CHT

SWITCH-MIRROR HEAT
174757-25-CHT
PANEL-SWITCH
MOUNTING,SINGLE
174834-01-CHT

DA

- 5 THIS WIRE ASM USED ON E26HE, E31BE, & E31KE FOR THE BATTERY BOOST SWITCH.
- 4 THIS WIRE ASM USED ON E27N,E30T,E35B,E35F, & E36Y FOR THE BATTERY BOOST SWITCH.
- 3 WIRING FROM LEVELING SYSTEM. SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.
- 2 CONNECT POSITIVE WIRE TO TERMINAL MARKED WITH "RED".
- 1 CHASSIS SUPPLIED

NOTES:

- 60M HYDRAULIC LEVEL JACKS-AUTO
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DESCRIPTION:	
1B1 265	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO:
3 OF 9	000174437 / 30014301000
REV	

DETAIL CA

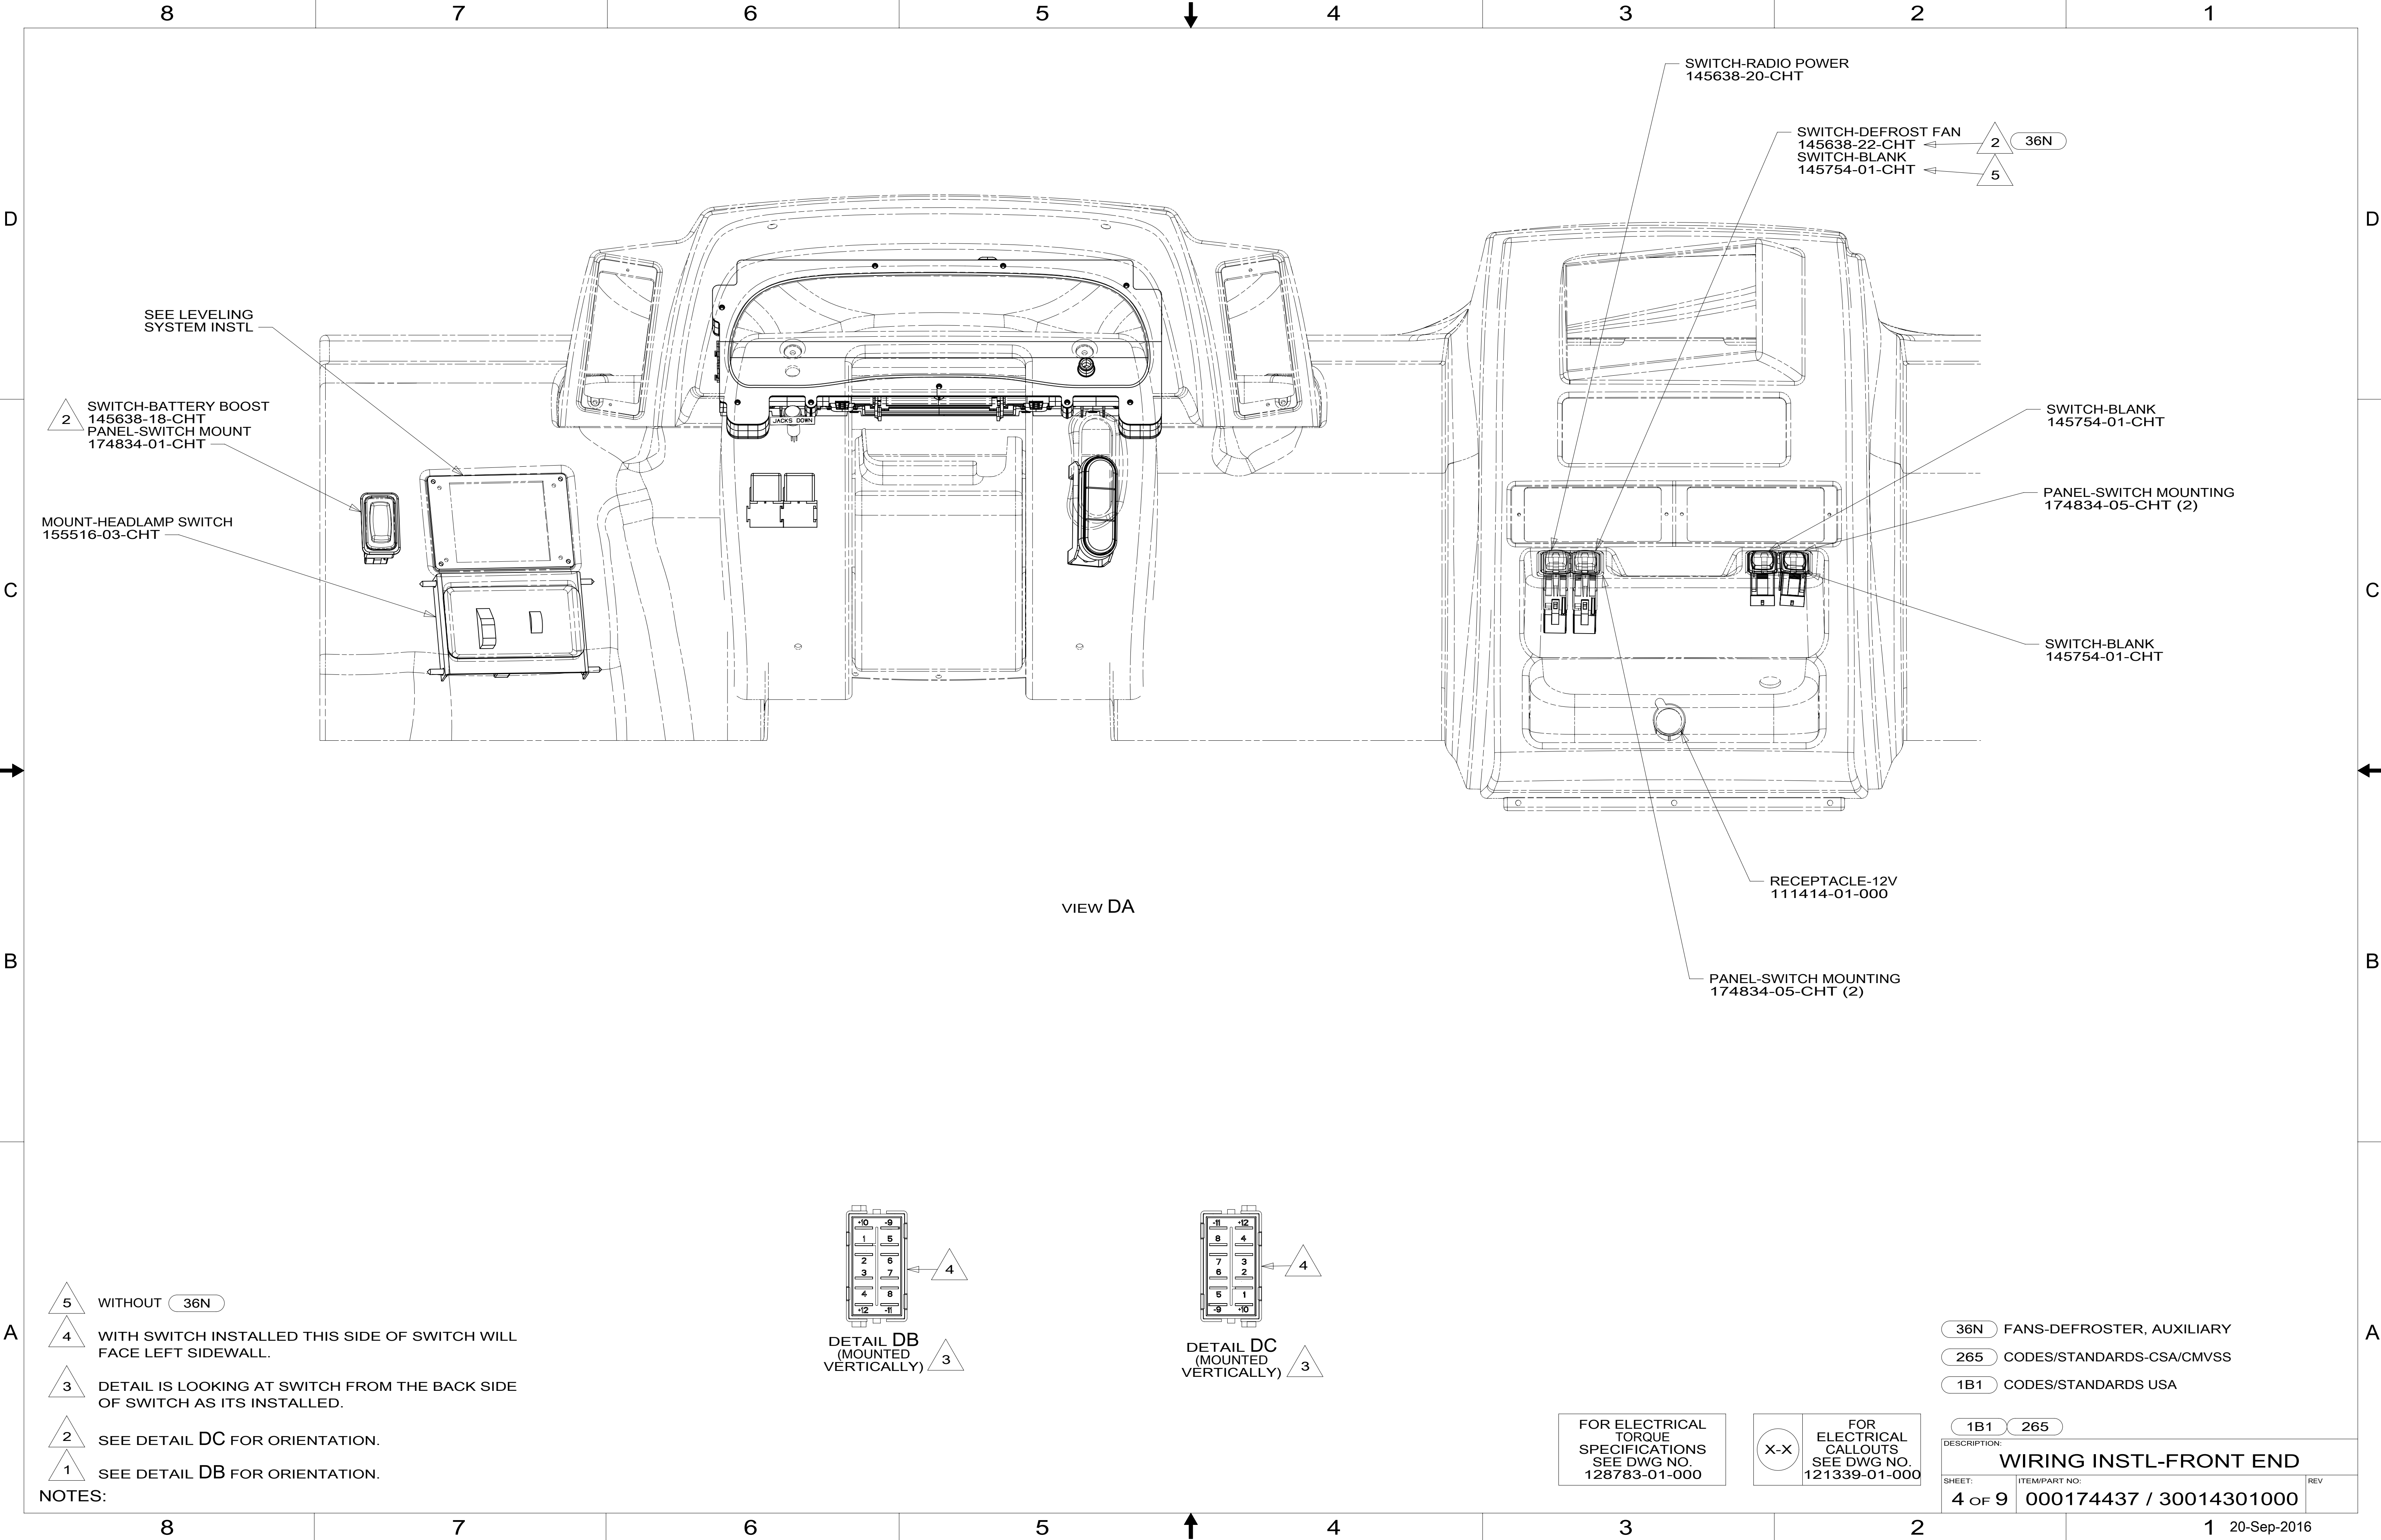

SEE LEVELING
SYSTEM INSTL

2 SWITCH-BATTERY BOOST
145638-18-CHT
PANEL-SWITCH MOUNT
174834-01-CHT

MOUNT-HEADLAMP SWITCH
155516-03-CHT

SWITCH-RADIO POWER
145638-20-CHT

SWITCH-DEFROST FAN
145638-22-CHT
SWITCH-BLANK
145754-01-CHT

2 36N
5

SWITCH-BLANK
145754-01-CHT

PANEL-SWITCH MOUNTING
174834-05-CHT (2)

SWITCH-BLANK
145754-01-CHT



RECEPTACLE-12V
111414-01-000

PANEL-SWITCH MOUNTING
174834-05-CHT (2)

VIEW DA

- 5 WITHOUT 36N
- 4 WITH SWITCH INSTALLED THIS SIDE OF SWITCH WILL
FACE LEFT SIDEWALL.
- 3 DETAIL IS LOOKING AT SWITCH FROM THE BACK SIDE
OF SWITCH AS ITS INSTALLED.
- 2 SEE DETAIL DC FOR ORIENTATION.
- 1 SEE DETAIL DB FOR ORIENTATION.

NOTES:

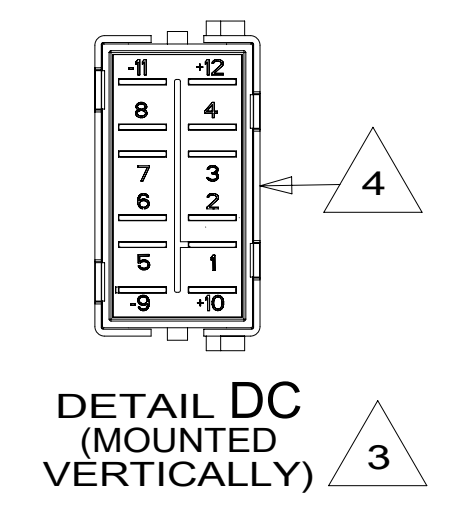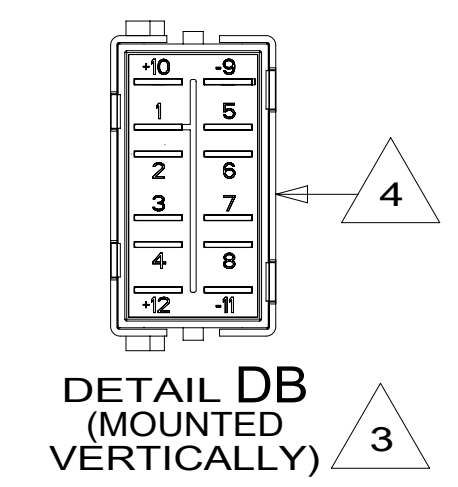


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 36N FANS-DEFROSTER, AUXILIARY
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-FRONT END		
SHEET: 4 OF 9	ITEM/PART NO: 000174437 / 30014301000	REV

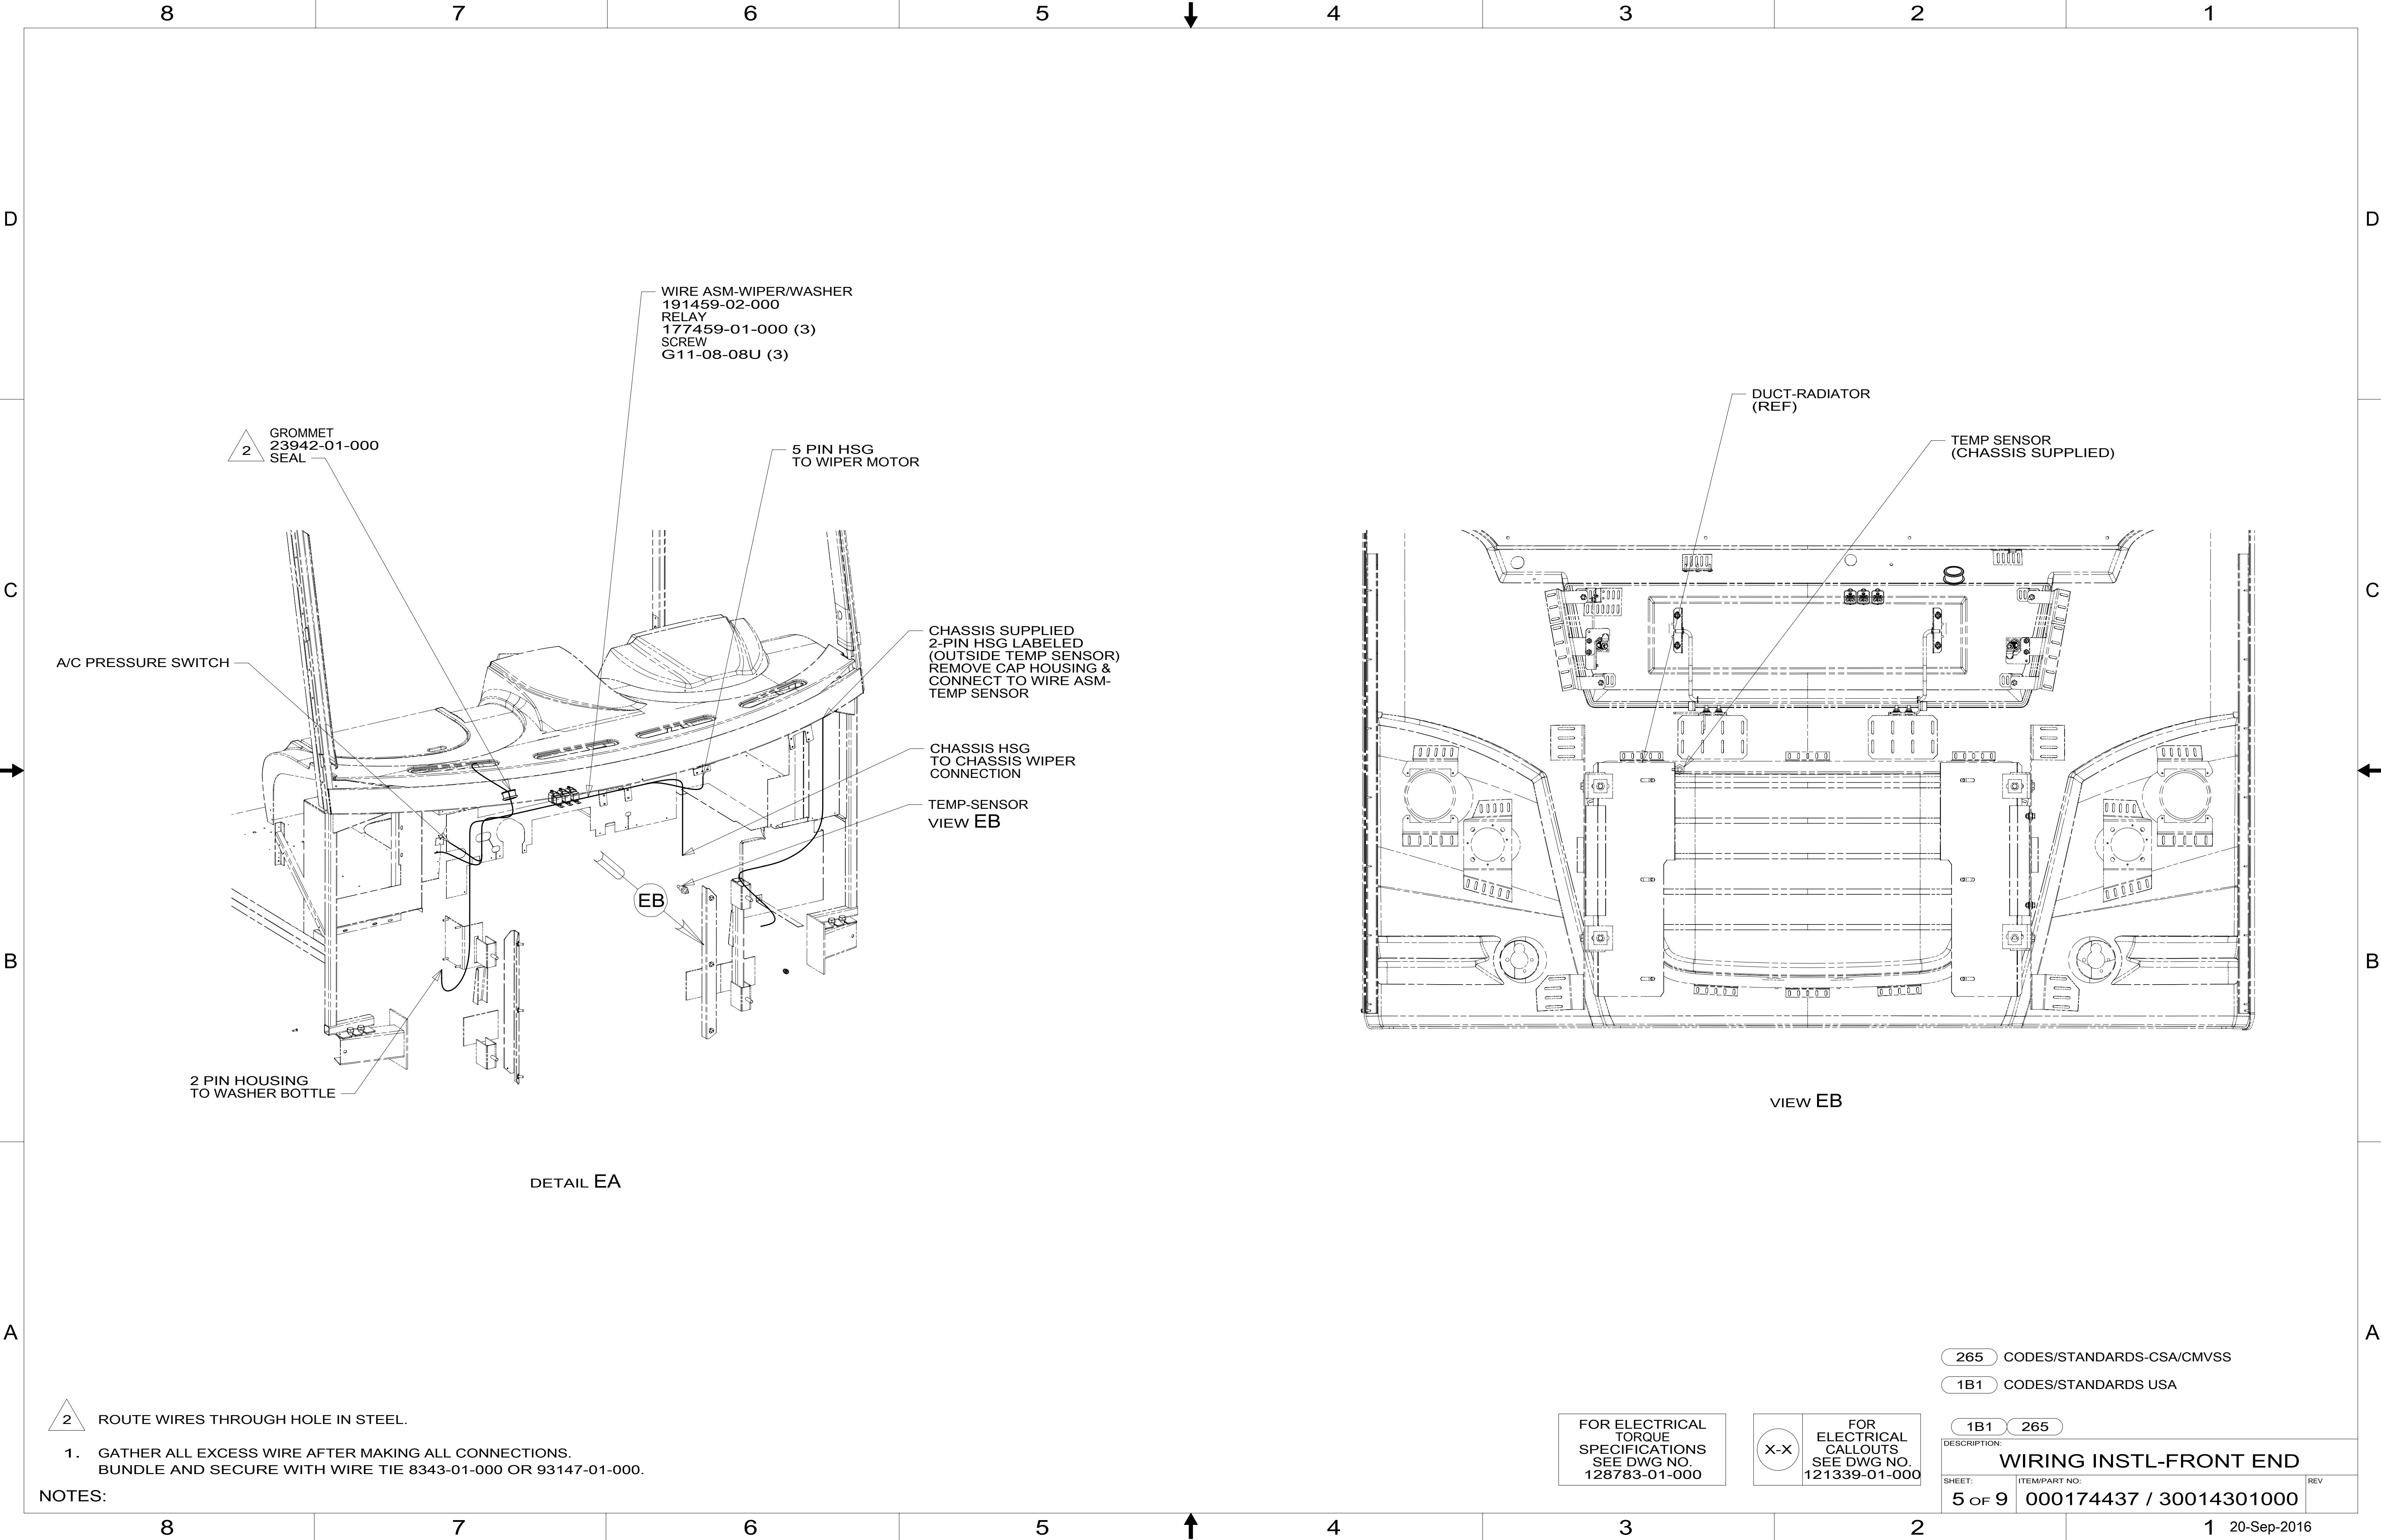

- 2 ROUTE WIRES THROUGH HOLE IN STEEL.
1. GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS.
BUNDLE AND SECURE WITH WIRE TIE 8343-01-000 OR 93147-01-000.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:
WIRING INSTL-FRONT END

SHEET: 5 OF 9 ITEM/PART NO: 000174437 / 30014301000 REV

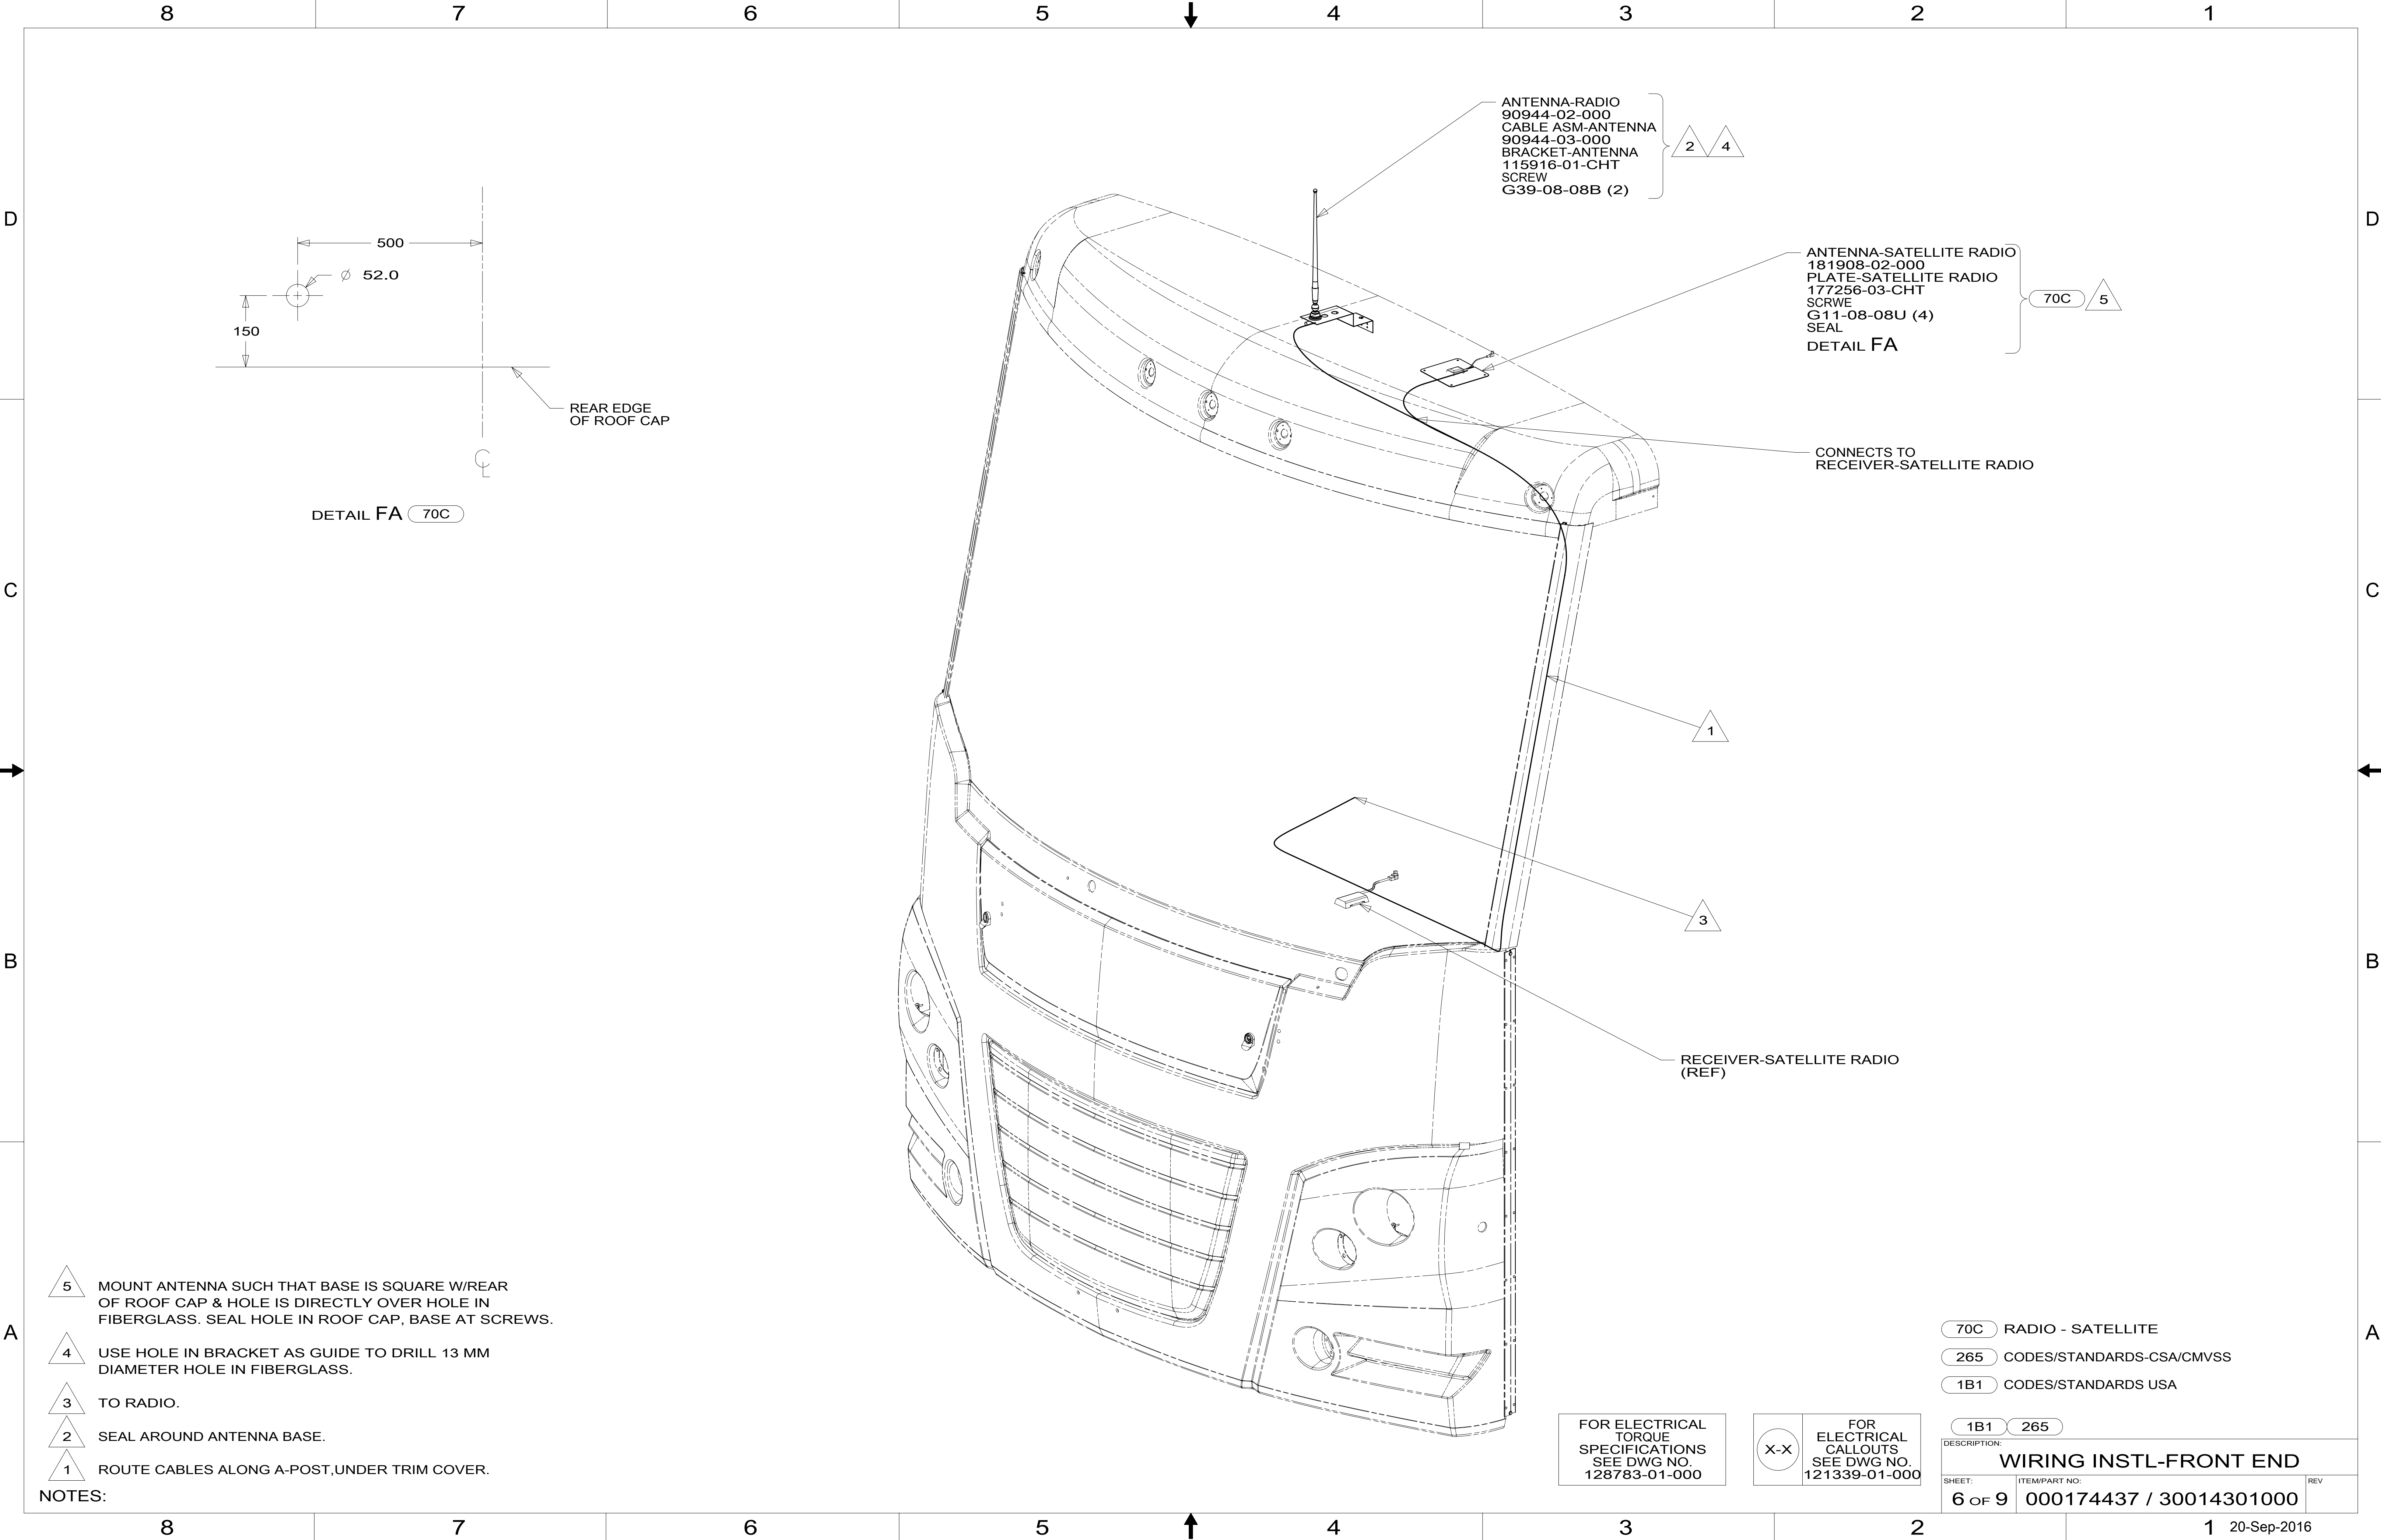

ANTENNA-RADIO
90944-02-000
CABLE ASM-ANTENNA
90944-03-000
BRACKET-ANTENNA
115916-01-CHT
SCREW
G39-08-08B (2)

2 4

ANTENNA-SATELLITE RADIO
181908-02-000
PLATE-SATELLITE RADIO
177256-03-CHT
SCREW
G11-08-08U (4)
SEAL
DETAIL FA

70C 5

CONNECTS TO
RECEIVER-SATELLITE RADIO

1

3

RECEIVER-SATELLITE RADIO
(REF)

- 5 MOUNT ANTENNA SUCH THAT BASE IS SQUARE W/REAR OF ROOF CAP & HOLE IS DIRECTLY OVER HOLE IN FIBERGLASS. SEAL HOLE IN ROOF CAP, BASE AT SCREWS.
- 4 USE HOLE IN BRACKET AS GUIDE TO DRILL 13 MM DIAMETER HOLE IN FIBERGLASS.
- 3 TO RADIO.
- 2 SEAL AROUND ANTENNA BASE.
- 1 ROUTE CABLES ALONG A-POST, UNDER TRIM COVER.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 70C RADIO - SATELLITE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-FRONT END		
SHEET: 6 OF 9	ITEM/PART NO: 000174437 / 30014301000	REV

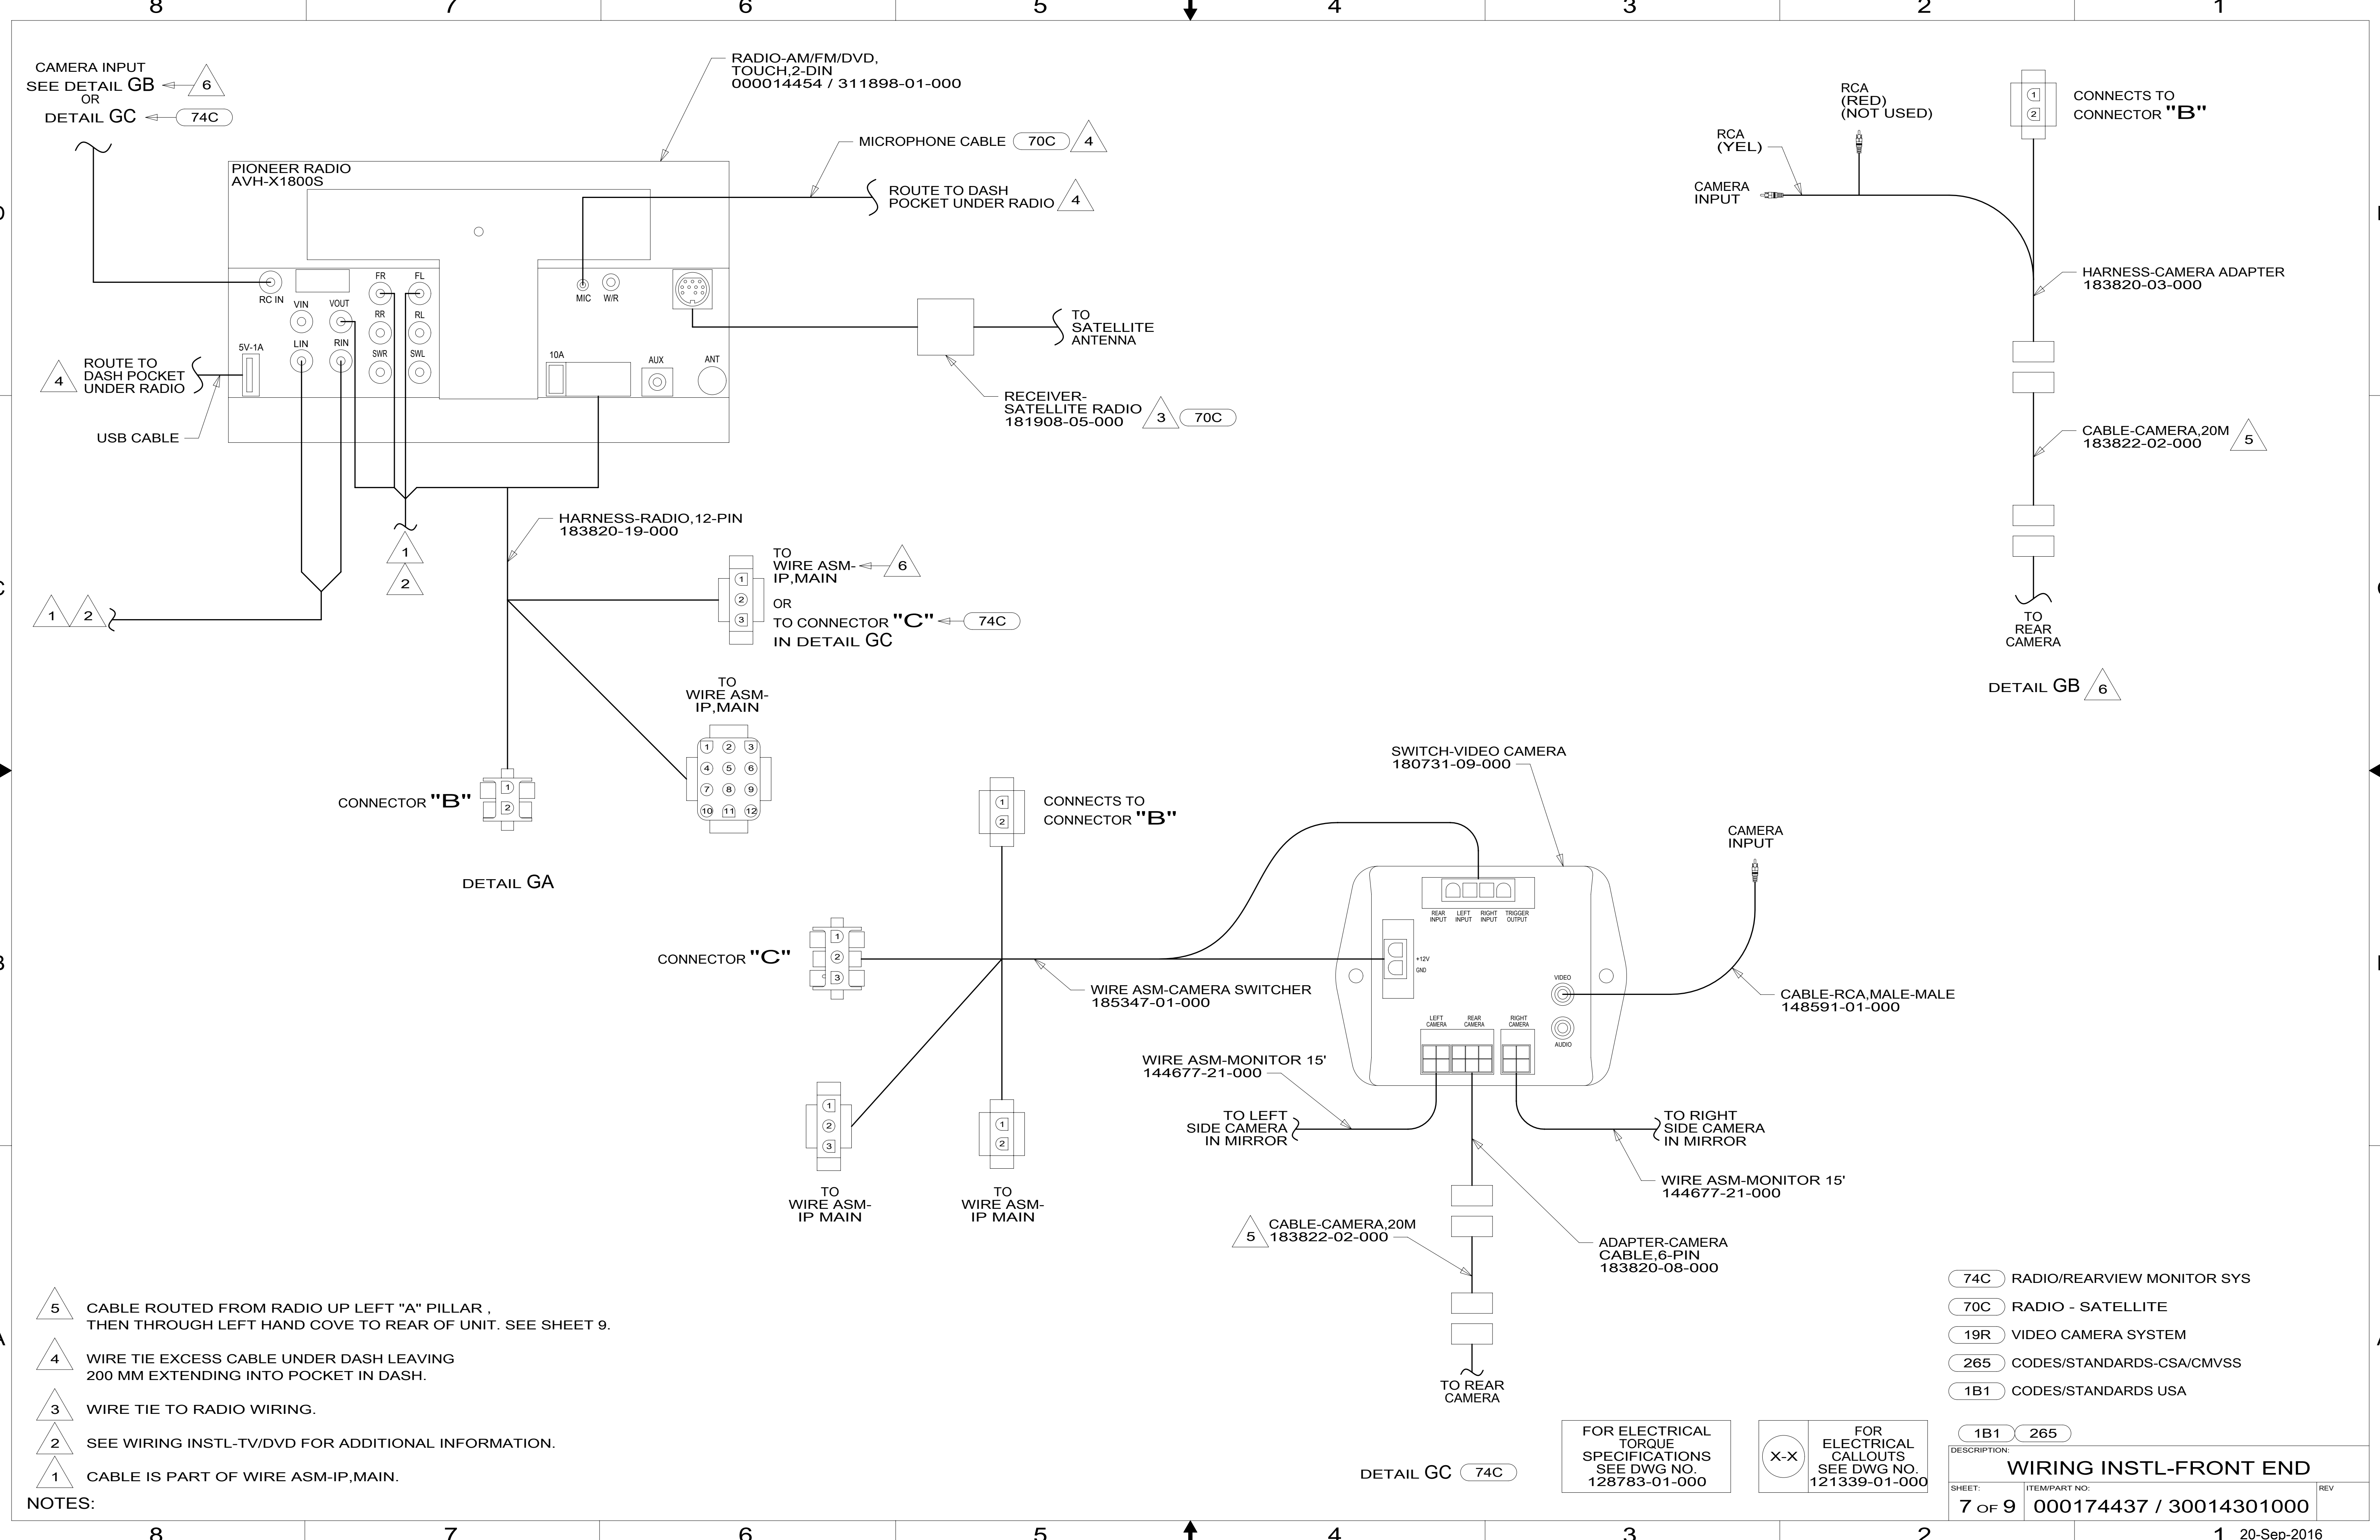

CAMERA INPUT
SEE DETAIL GB
OR
DETAIL GC

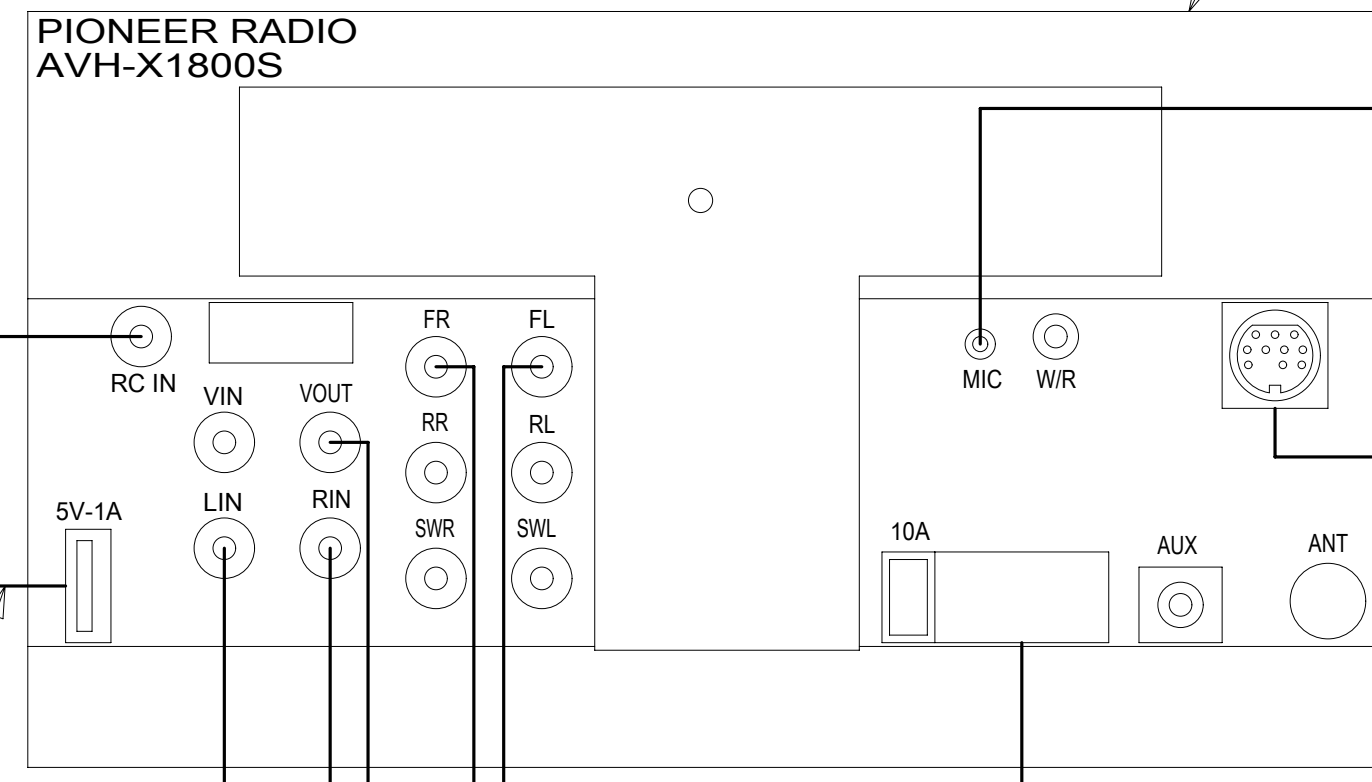

RADIO-AM/FM/DVD,
TOUCH.2-DIN
000014454 / 311898-01-000

MICROPHONE CABLE 70C 4

ROUTE TO DASH
POCKET UNDER RADIO 4

TO SATELLITE
ANTENNA

RECEIVER-
SATELLITE RADIO
181908-05-000 3 70C

HARNESS-RADIO,12-PIN
183820-19-000

TO WIRE ASM-
IP,MAIN 6
OR
TO CONNECTOR "C"
IN DETAIL GC 74C

TO WIRE ASM-
IP,MAIN

CONNECTOR "B"

DETAIL GA

CONNECTS TO
CONNECTOR "B"

CONNECTOR "C"

WIRE ASM-CAMERA SWITCHER
185347-01-000

WIRE ASM-MONITOR 15'
144677-21-000

TO LEFT
SIDE CAMERA
IN MIRROR

SWITCH-VIDEO CAMERA
180731-09-000

CAMERA
INPUT

CABLE-RCA,MALE-MALE
148591-01-000

ADAPTER-CAMERA
CABLE,6-PIN
183820-08-000

TO REAR
CAMERA

DETAIL GC 74C


- NOTES:
- 5 CABLE ROUTED FROM RADIO UP LEFT "A" PILLAR , THEN THROUGH LEFT HAND COVE TO REAR OF UNIT. SEE SHEET 9.
 - 4 WIRE TIE EXCESS CABLE UNDER DASH LEAVING 200 MM EXTENDING INTO POCKET IN DASH.
 - 3 WIRE TIE TO RADIO WIRING.
 - 2 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
 - 1 CABLE IS PART OF WIRE ASM-IP,MAIN.

- 74C RADIO/REARVIEW MONITOR SYS
- 70C RADIO - SATELLITE
- 19R VIDEO CAMERA SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO:
7 OF 9	000174437 / 30014301000
REV	
1 20-Sep-2016	

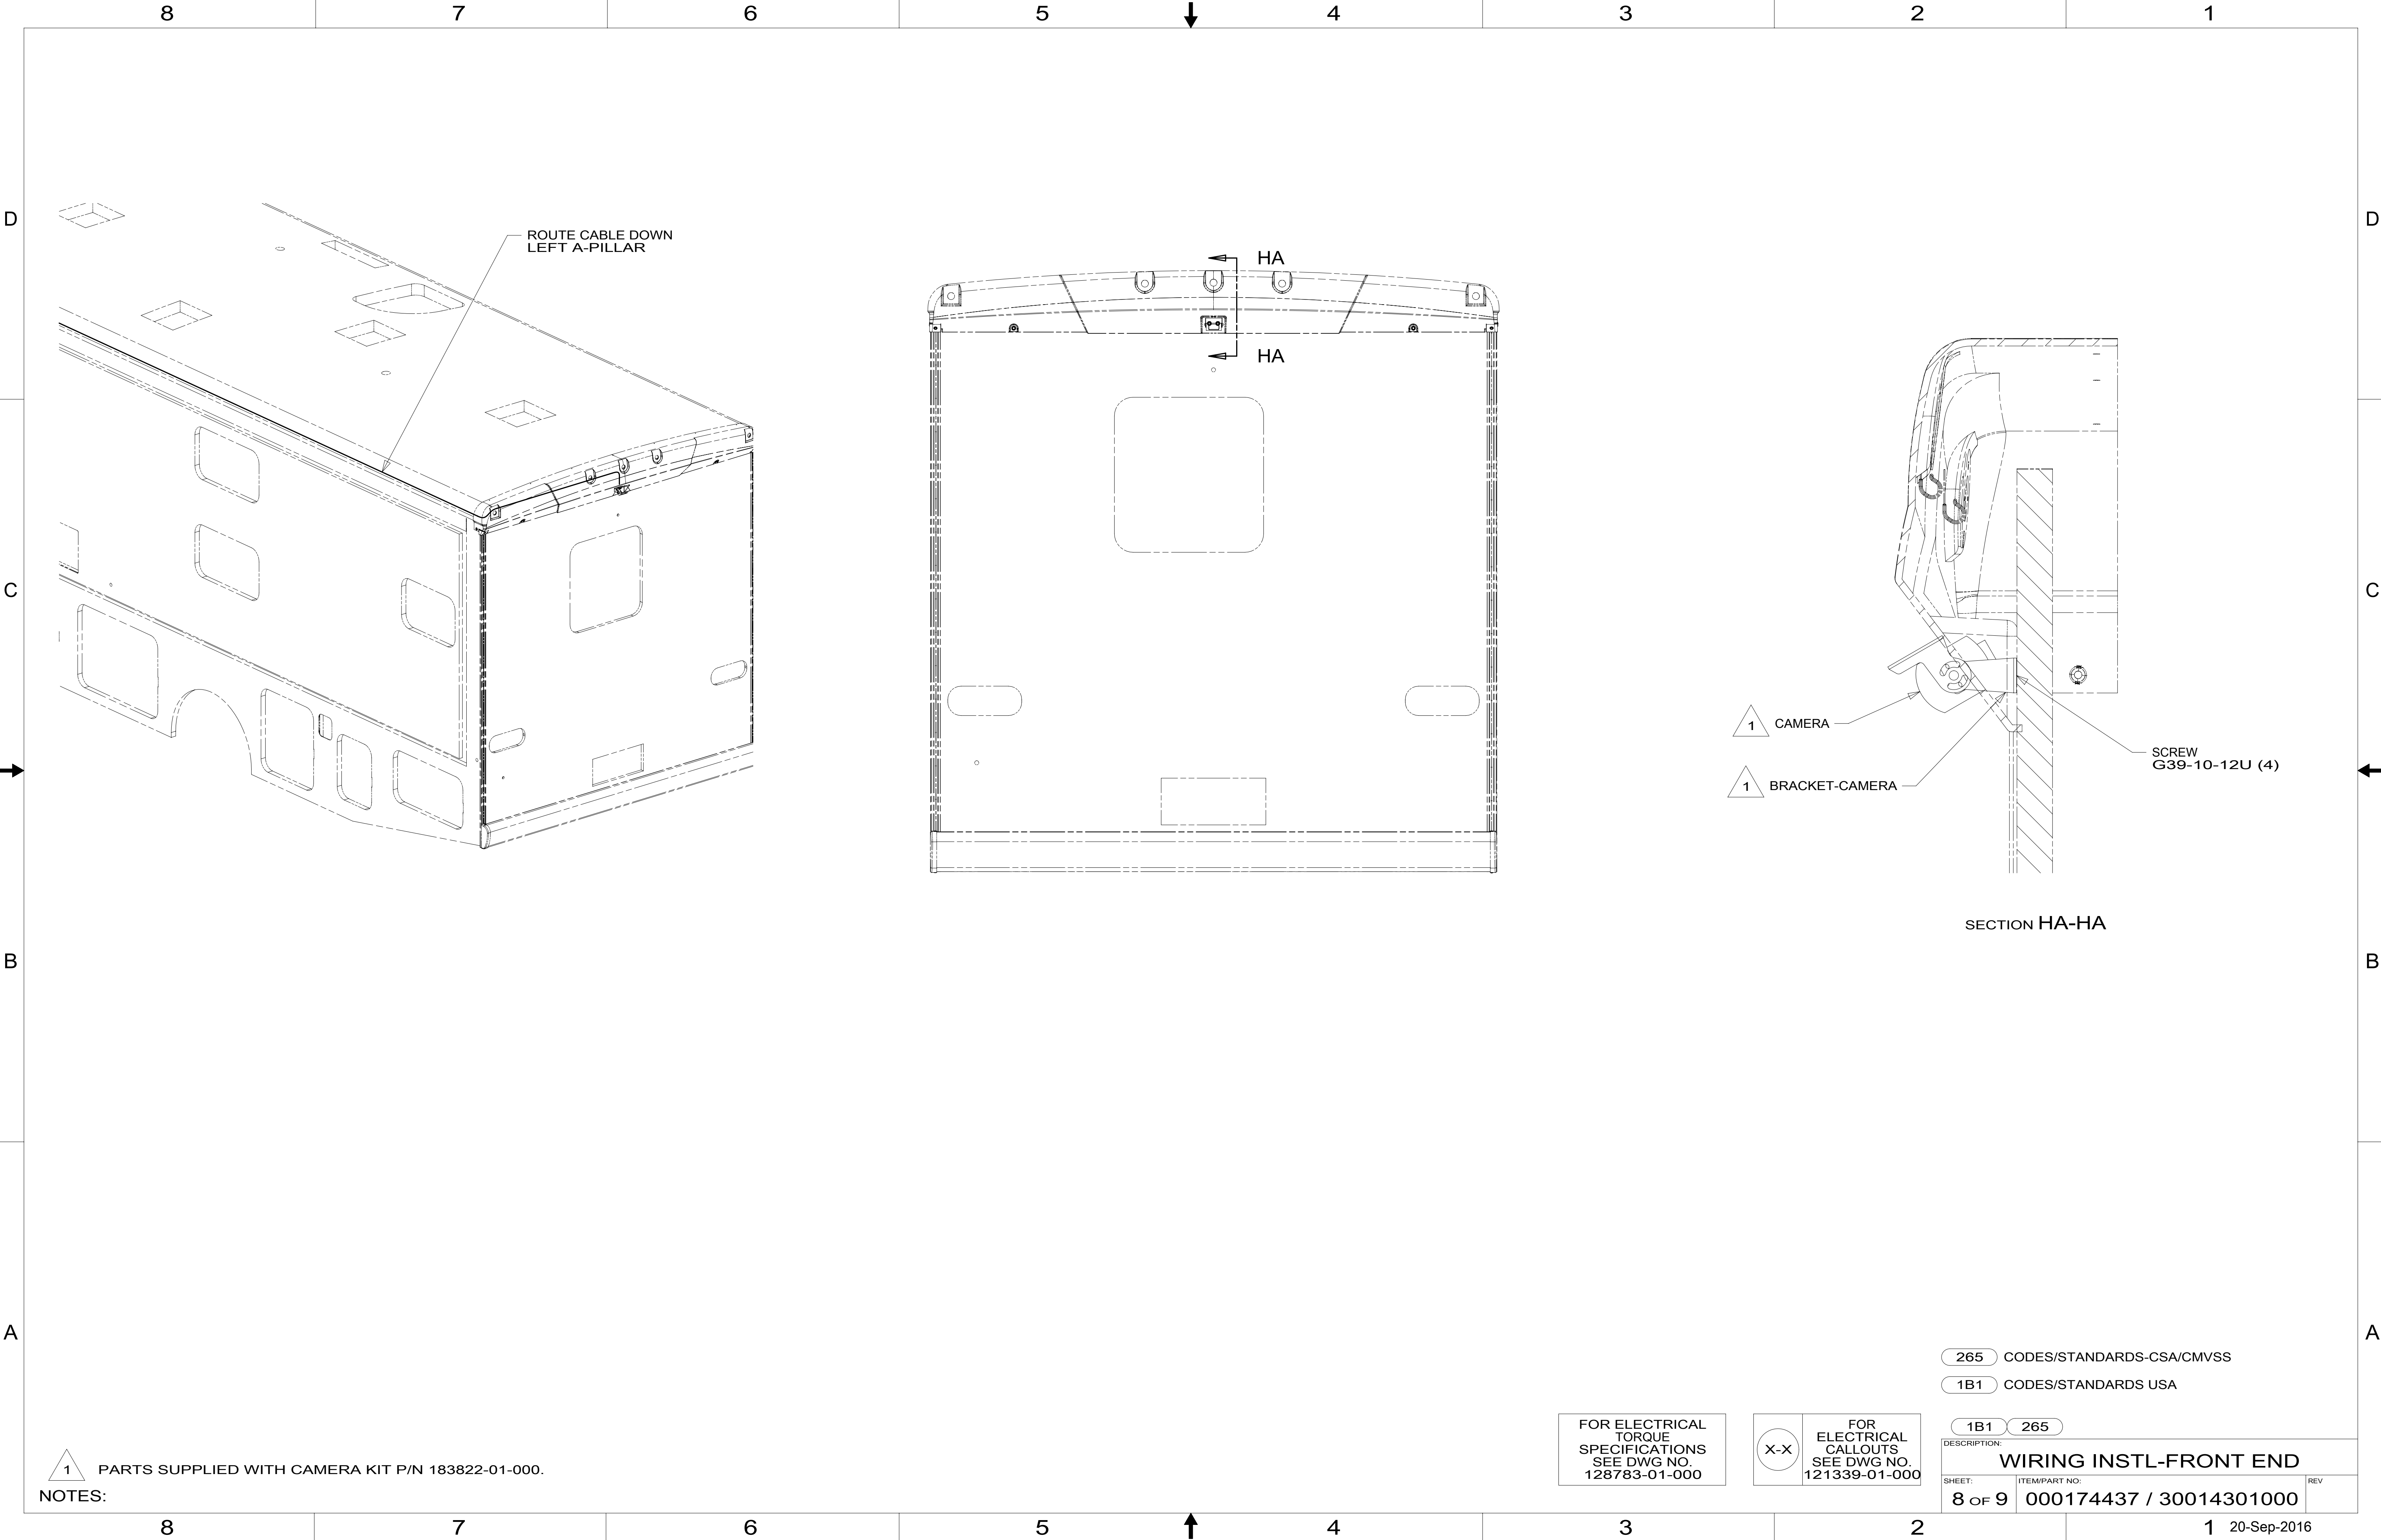

ROUTE CABLE DOWN
LEFT A-PILLAR

HA

HA

1

CAMERA

1

BRACKET-CAMERA

SCREW
G39-10-12U (4)

SECTION HA-HA

1

PARTS SUPPLIED WITH CAMERA KIT P/N 183822-01-000.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

DESCRIPTION:

WIRING INSTL-FRONT END

SHEET:


8 OF 9

ITEM/PART NO:

000174437 / 30014301000

REV

1 20-Sep-2016

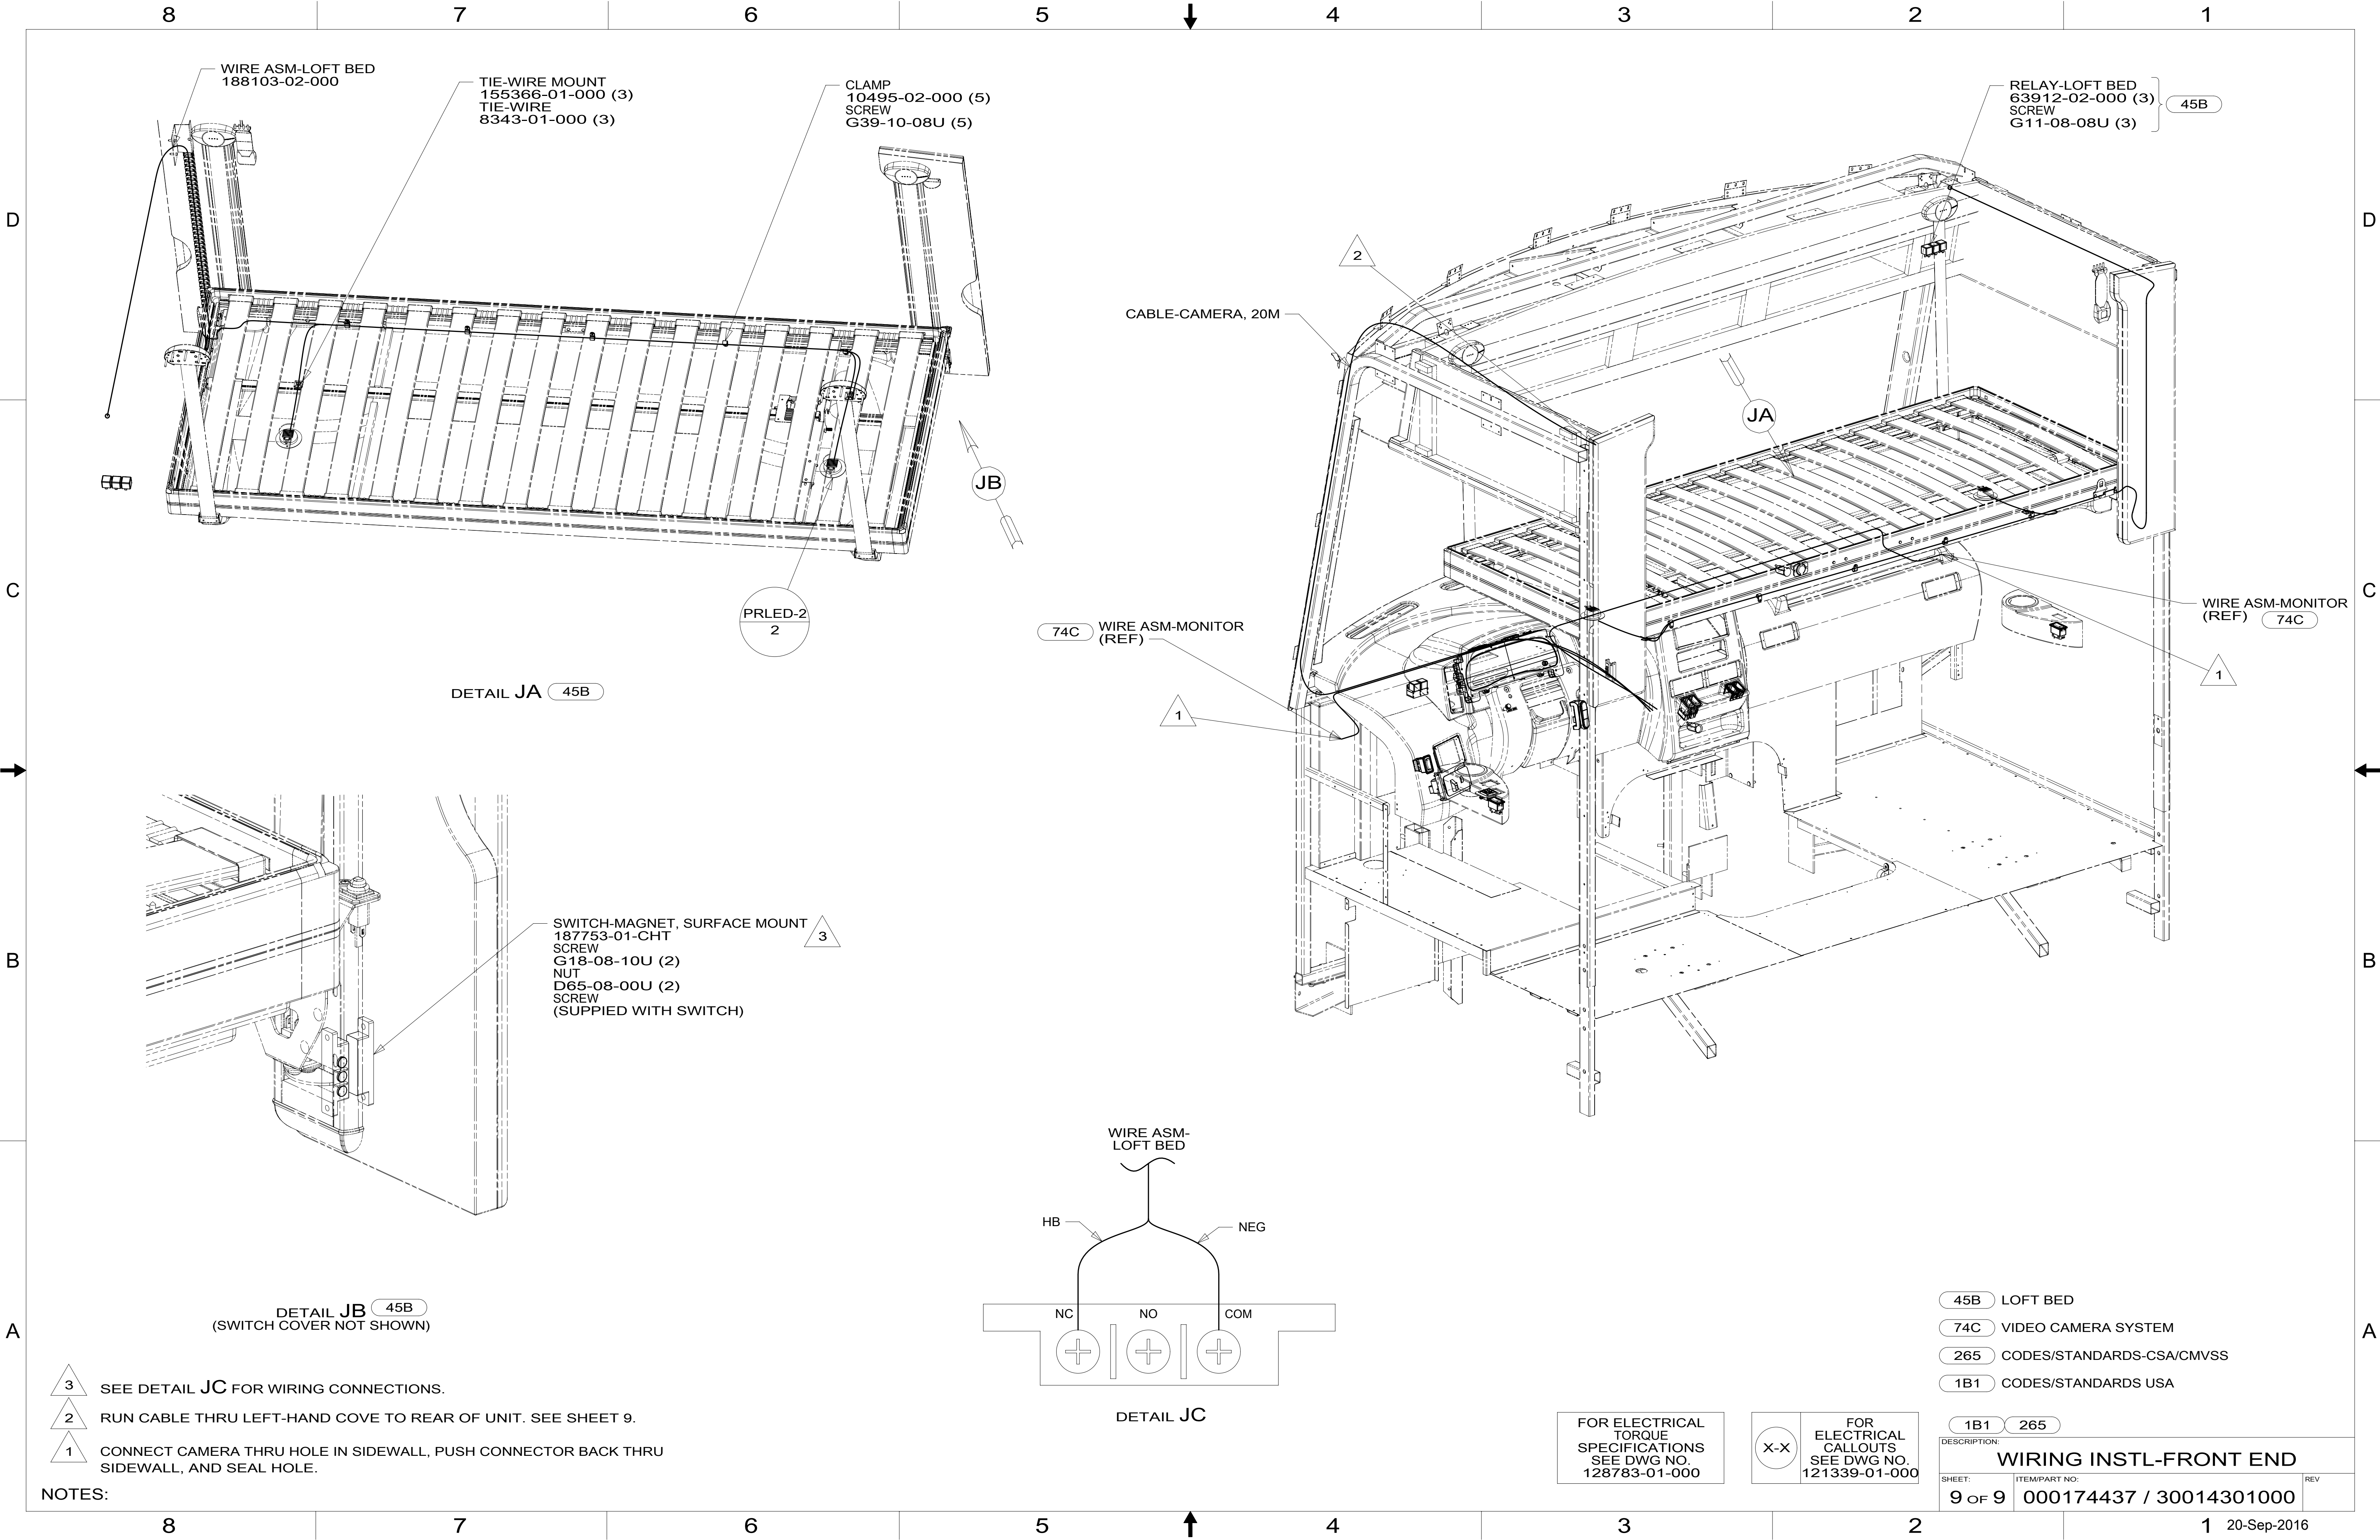

- NOTES:
- 3 SEE DETAIL JC FOR WIRING CONNECTIONS.
 - 2 RUN CABLE THRU LEFT-HAND COVE TO REAR OF UNIT. SEE SHEET 9.
 - 1 CONNECT CAMERA THRU HOLE IN SIDEWALL, PUSH CONNECTOR BACK THRU SIDEWALL, AND SEAL HOLE.