



VIEW AA

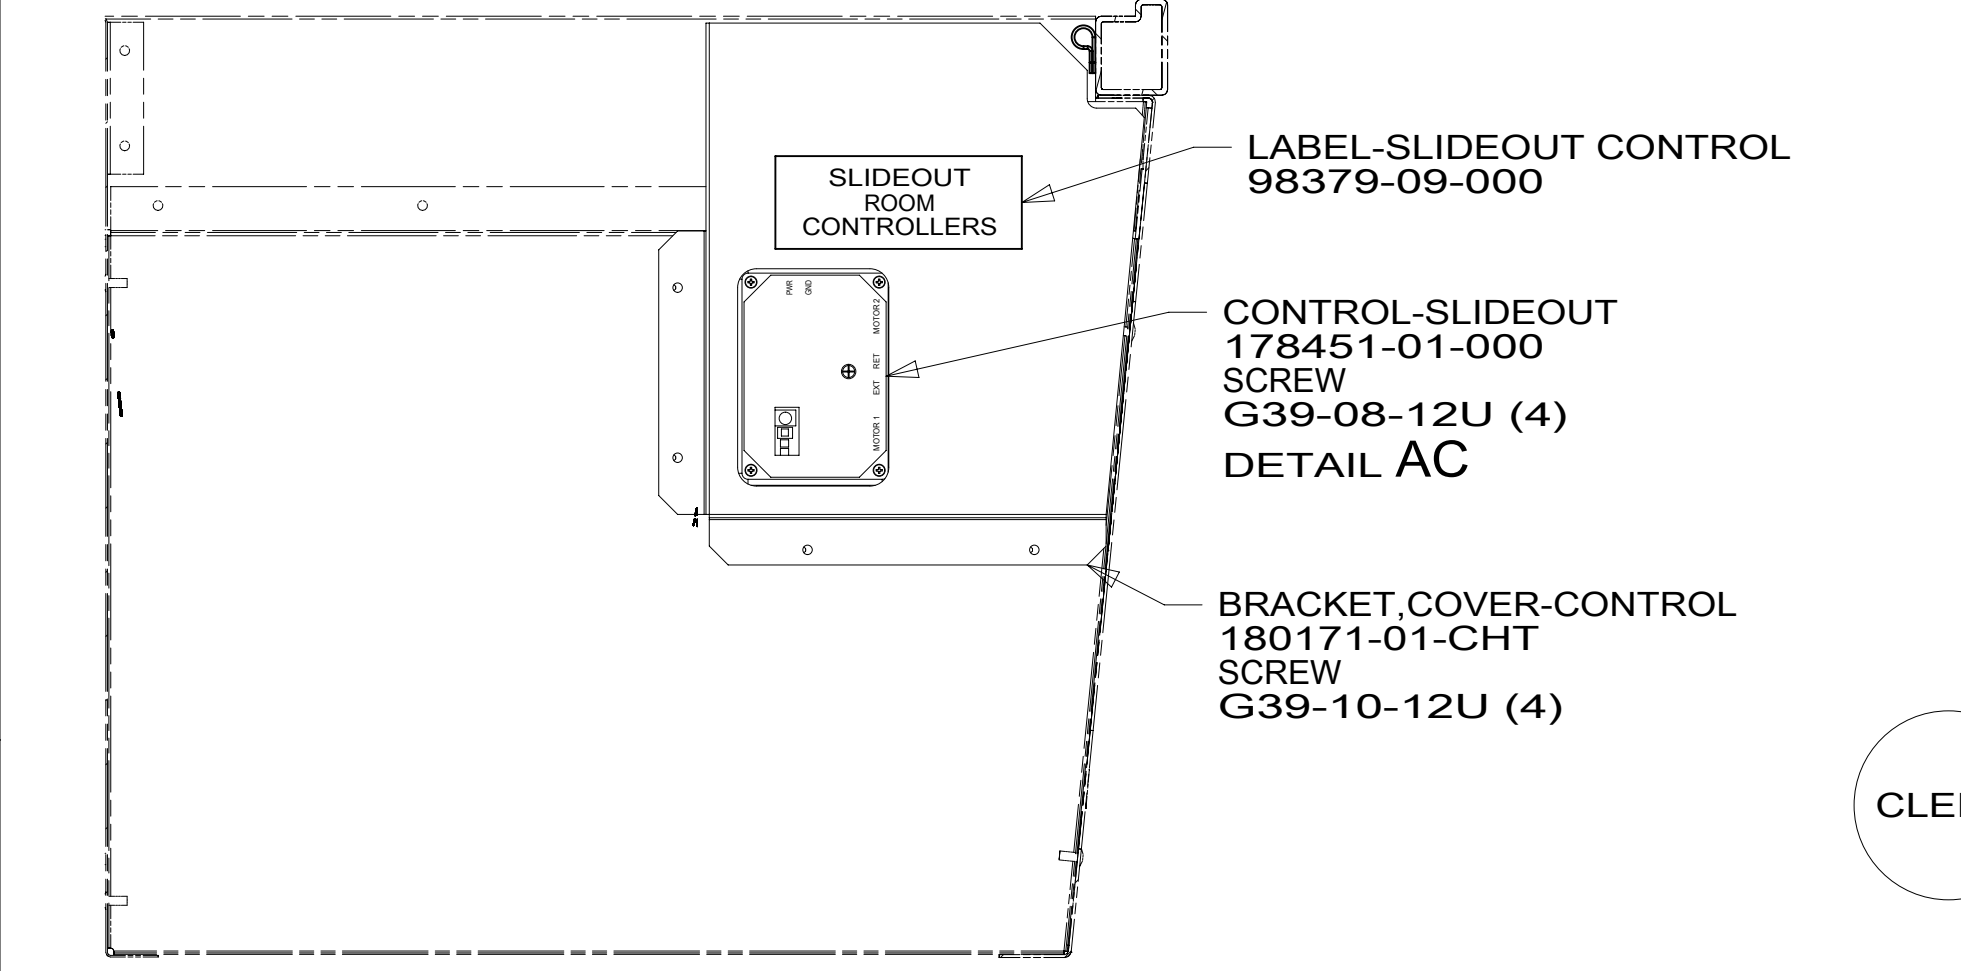

VIEW AB

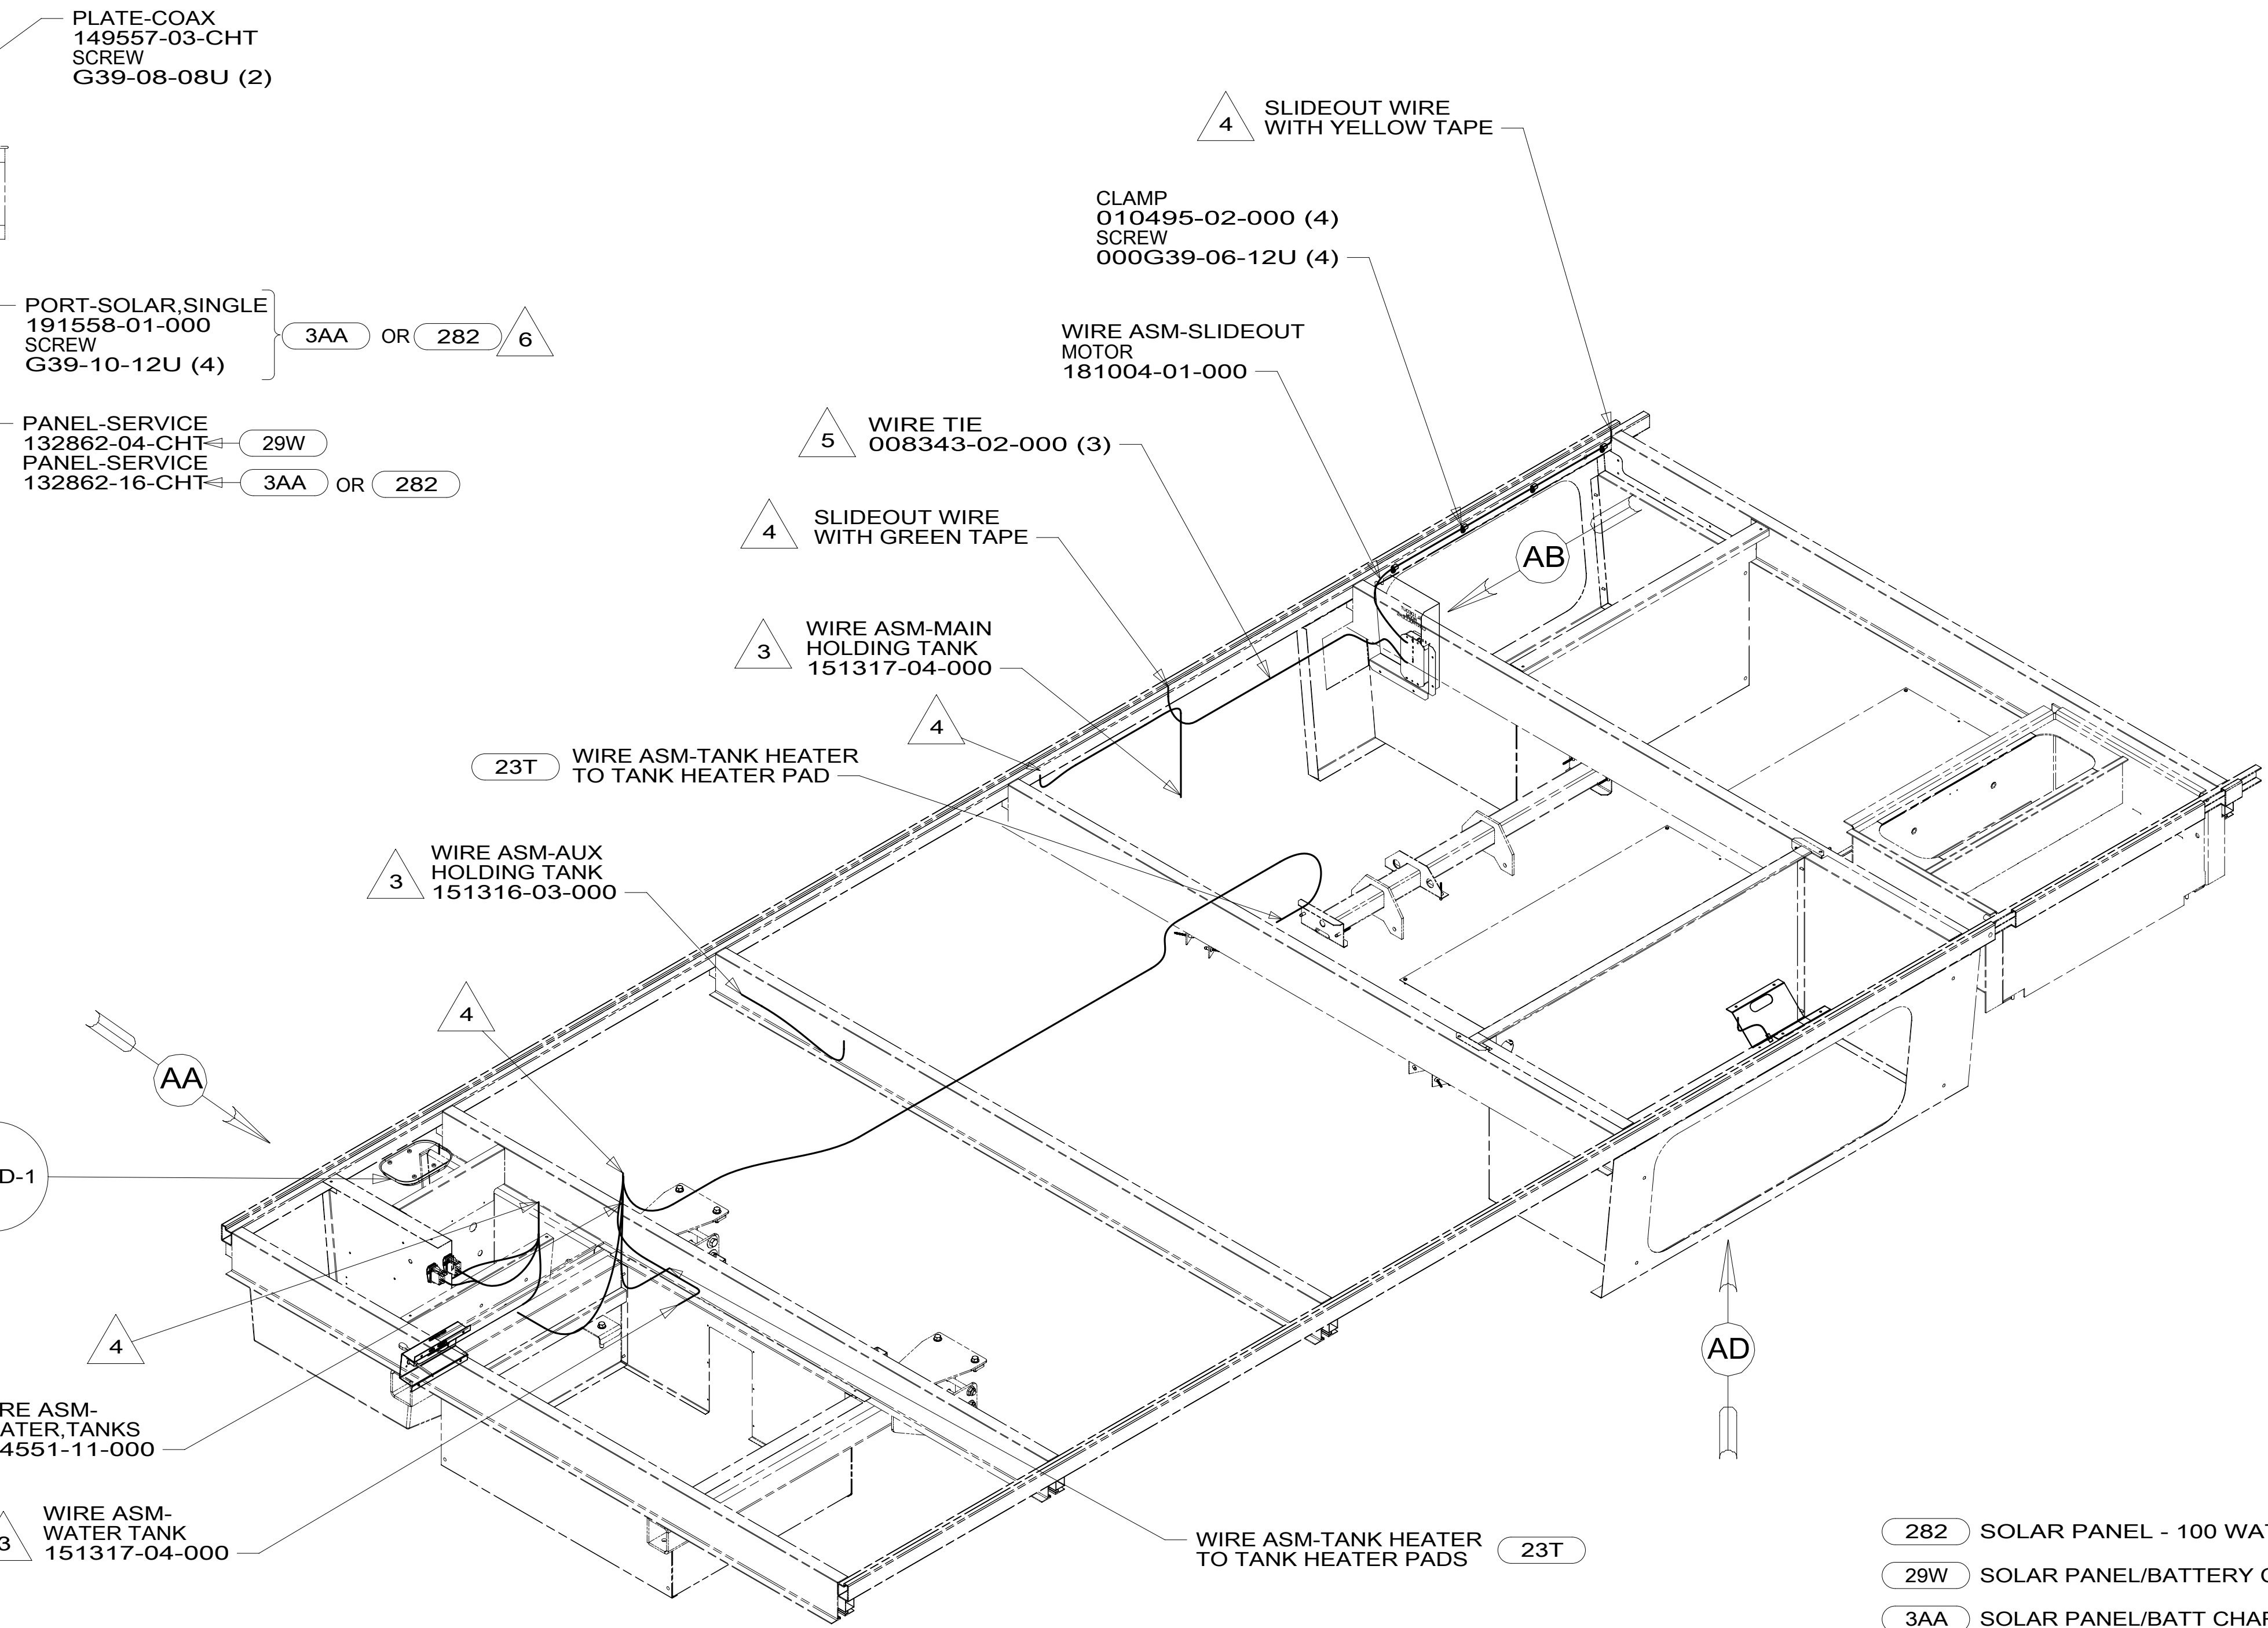


- 6 SPLICE YELLOW TO RED AND WHITE TO BLACK.
- 5 SECURE WIRE ASM TO HOLDING TANK CRADLE ASM.
- 4 WIRE PASSES THROUGH FLOOR IN THIS AREA.
- 3 PLACE CROSS LOCATOR ON SENSORS OVER DIMPLES ON TANK.


2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASSOVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

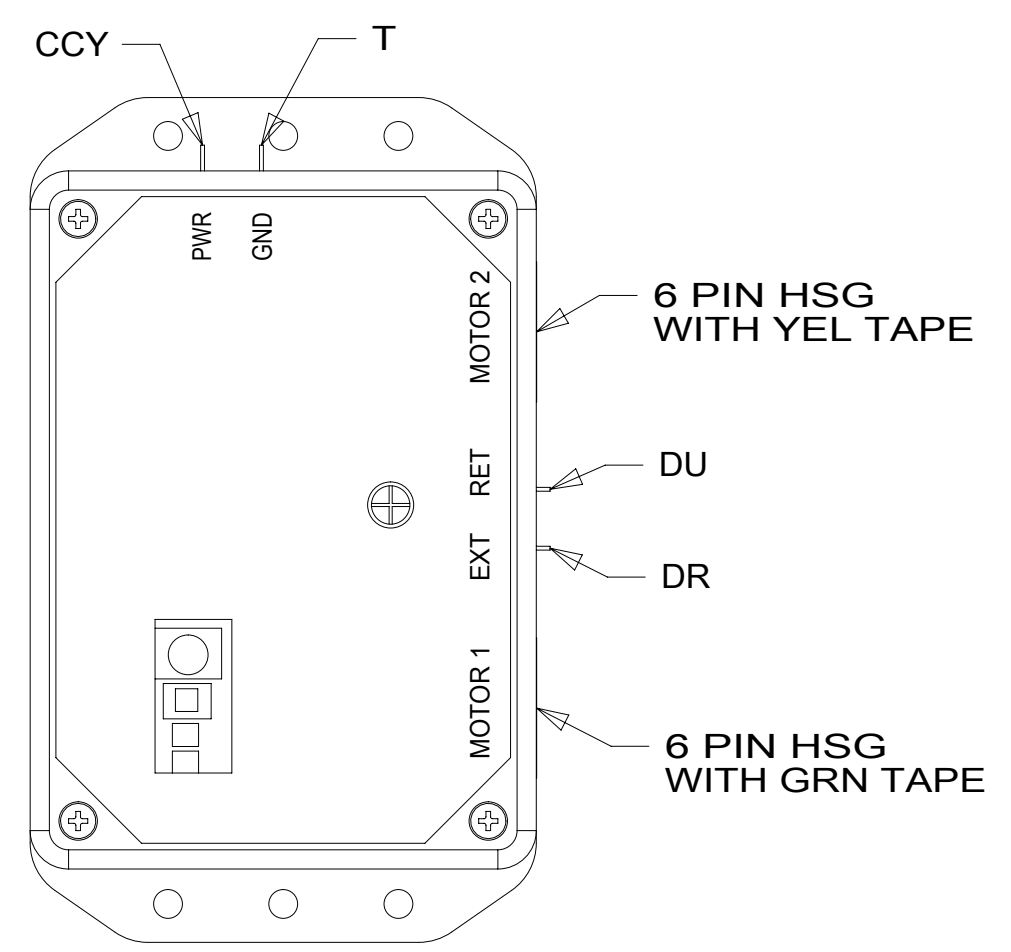

VIEW AC

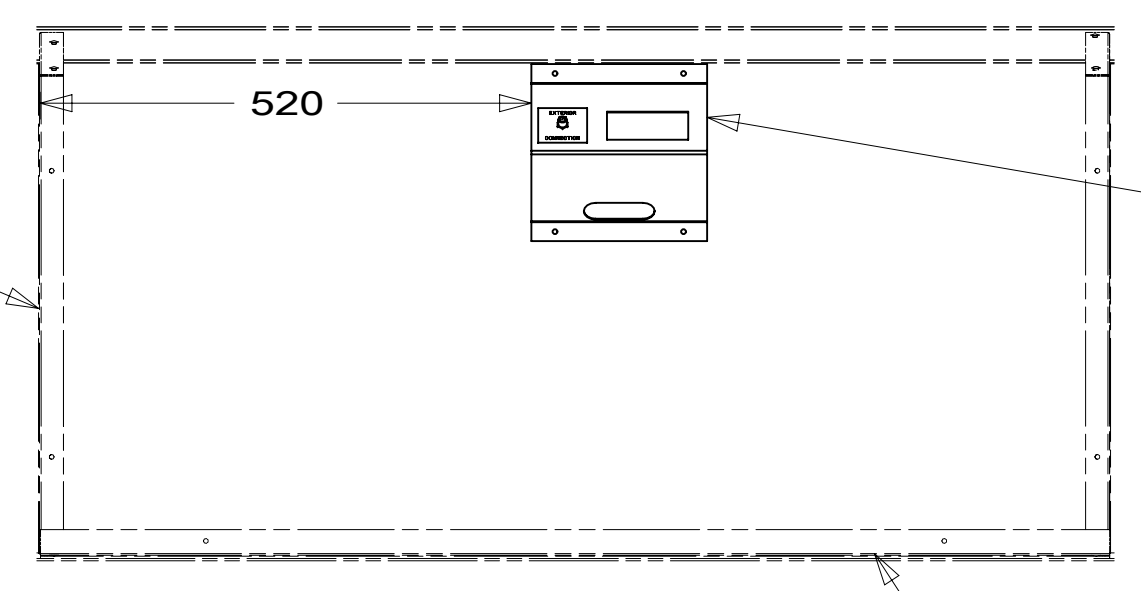

VIEW AD

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 282 SOLAR PANEL - 100 WATT
- 29W SOLAR PANEL/BATTERY CHRGR W/O
- 3AA SOLAR PANEL/BATT CHARGER SYS
- 23T DRAINAGE SYSTEM-HEATED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

WINNEBAGO

COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		
UNSPECIFIED TOLERANCES:	MATERIAL:	
WHOLE DIM (X) :	3	
ONE-PLACE (X.X) :	1.5	
TWO-PLACE (X.XX) :	0.50	
ANGLE :	1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:
		16 524V
DESCRIPTION:		
WIRING INSTL-BODY, 12V		
SHEET:	ITEM/PART NO.:	REV:
1 OF 7	000174574 / 30089501000	
REF:		

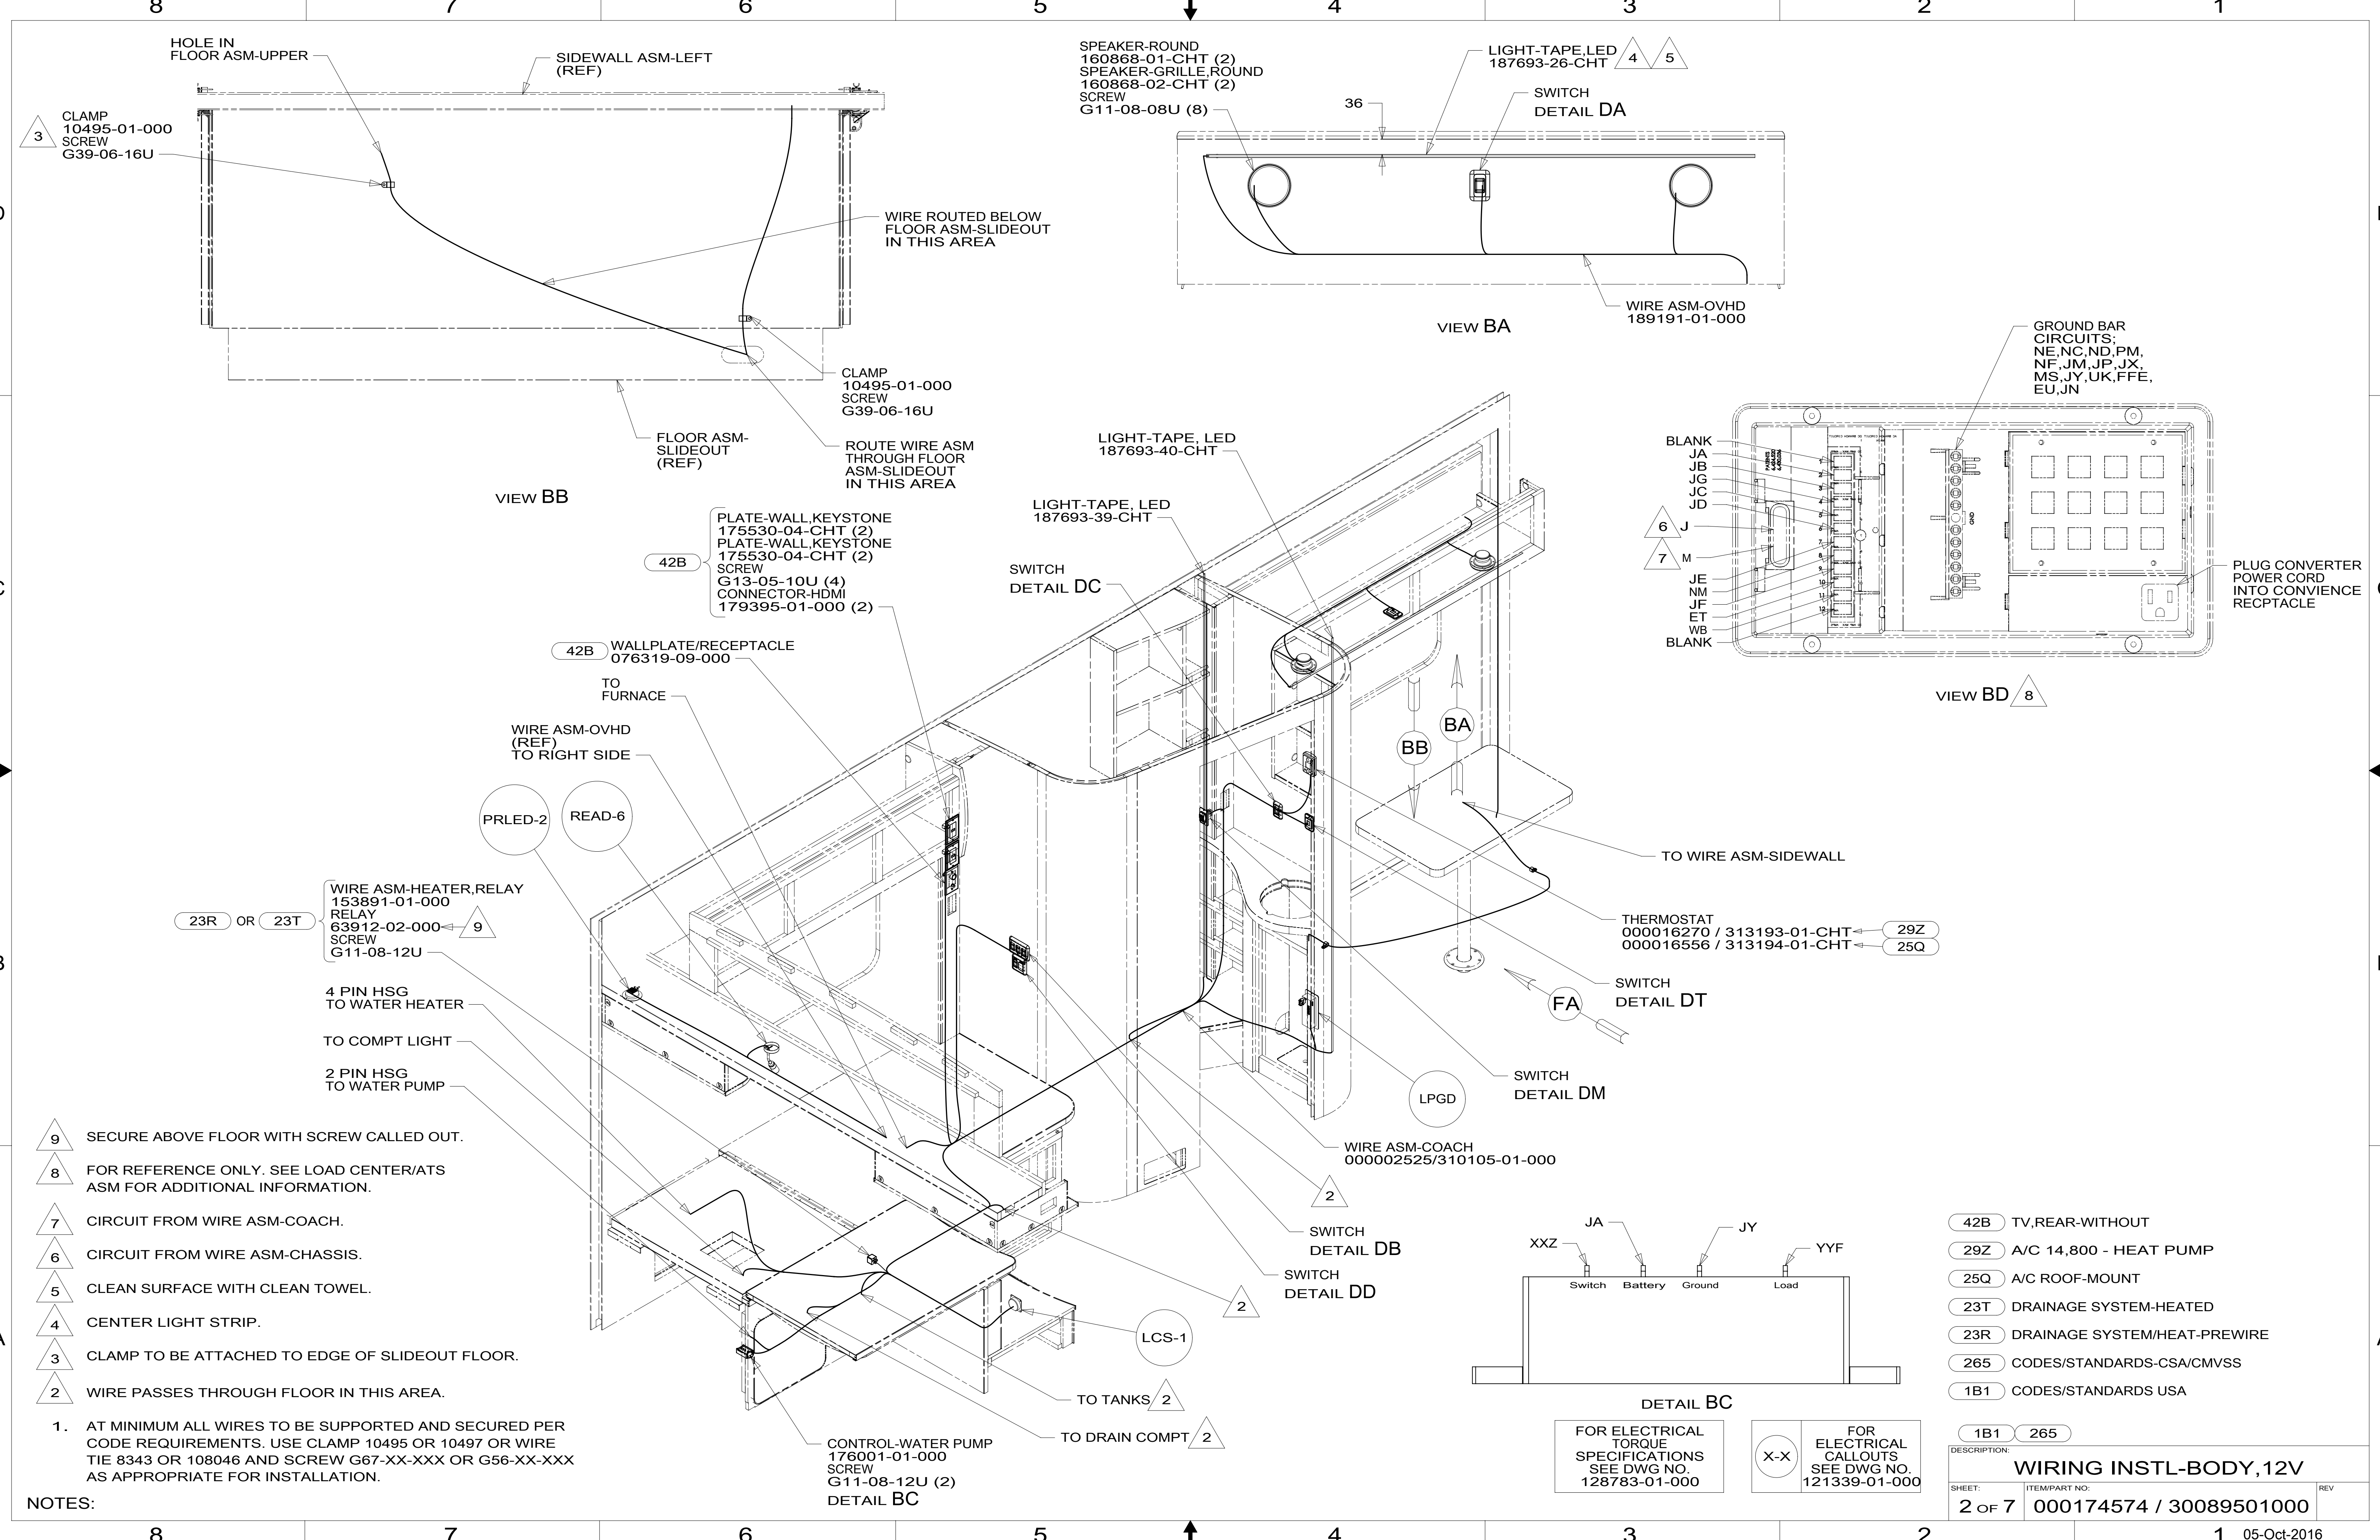

SPEAKER-ROUND
160868-01-CHT (2)
SPEAKER-GRILLE,ROUND
160868-02-CHT (2)
SCREW
G11-08-08U (8)

LIGHT-TAPE,LED
187693-26-CHT (4 5)
SWITCH
DETAIL DA

VIEW BA

WIRE ASM-OVHD
189191-01-000

VIEW BB

PLATE-WALL,KEystone
175530-04-CHT (2)
PLATE-WALL,KEystone
175530-04-CHT (2)
SCREW
G13-05-10U (4)
CONNECTOR-HDMI
179395-01-000 (2)

LIGHT-TAPE, LED
187693-39-CHT
SWITCH
DETAIL DC

BLANK
JA
JB
JG
JC
JD
J
M
JE
NM
JF
ET
WB
BLANK

GROUND BAR
CIRCUITS:
NE,NC,ND,PM,
NF,JM,JP,JX,
MS,JY,UK,FFE,
EU,JN

VIEW BD 8

PLUG CONVERTER
POWER CORD
INTO CONVICIENCE
RECPTACLE

42B WALLPLATE/RECEPTACLE
076319-09-000

TO FURNACE

WIRE ASM-OVHD
(REF)
TO RIGHT SIDE

PRLED-2 READ-6

WIRE ASM-HEATER,RELAY
153891-01-000
RELAY
63912-02-000 (9)
SCREW
G11-08-12U

4 PIN HSG
TO WATER HEATER

TO COMPT LIGHT

2 PIN HSG
TO WATER PUMP

THERMOSTAT
000016270 / 313193-01-CHT (29Z)
000016556 / 313194-01-CHT (25Q)


SWITCH
DETAIL DT

SWITCH
DETAIL DM

WIRE ASM-COACH
000002525/310105-01-000

SWITCH
DETAIL DB

SWITCH
DETAIL DD

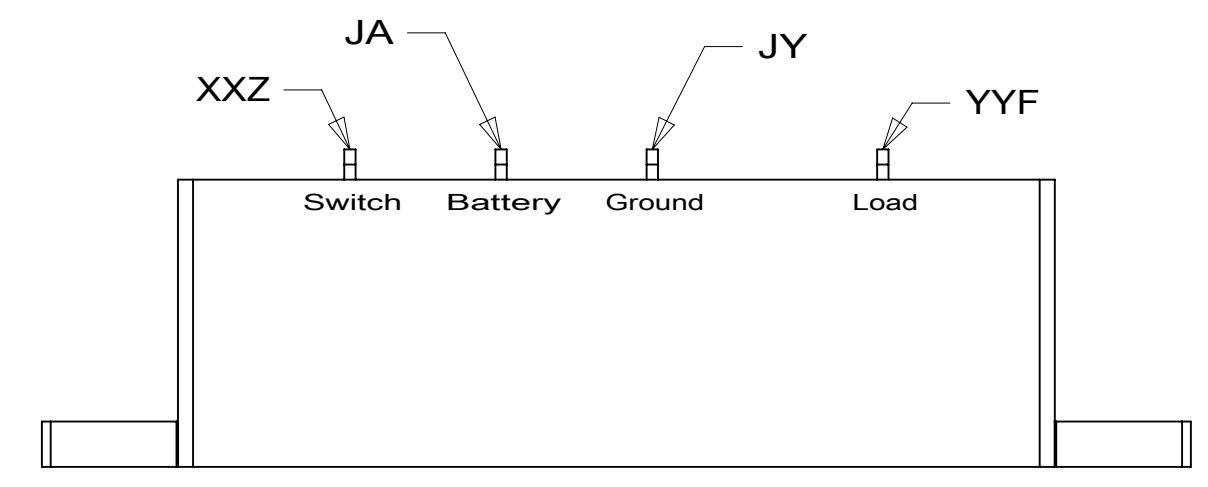

DETAIL BC

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


- 42B TV,REAR-WITHOUT
- 29Z A/C 14,800 - HEAT PUMP
- 25Q A/C ROOF-MOUNT
- 23T DRAINAGE SYSTEM-HEATED
- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

- 9 SECURE ABOVE FLOOR WITH SCREW CALLED OUT.
- 8 FOR REFERENCE ONLY. SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 7 CIRCUIT FROM WIRE ASM-COACH.
- 6 CIRCUIT FROM WIRE ASM-CHASSIS.
- 5 CLEAN SURFACE WITH CLEAN TOWEL.
- 4 CENTER LIGHT STRIP.
- 3 CLAMP TO BE ATTACHED TO EDGE OF SLIDEOUT FLOOR.
- 2 WIRE PASSES THROUGH FLOOR IN THIS AREA.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:



DESCRIPTION: WIRING INSTL-BODY, 12V		REV
SHEET: 2 OF 7	ITEM/PART NO: 000174574 / 30089501000	

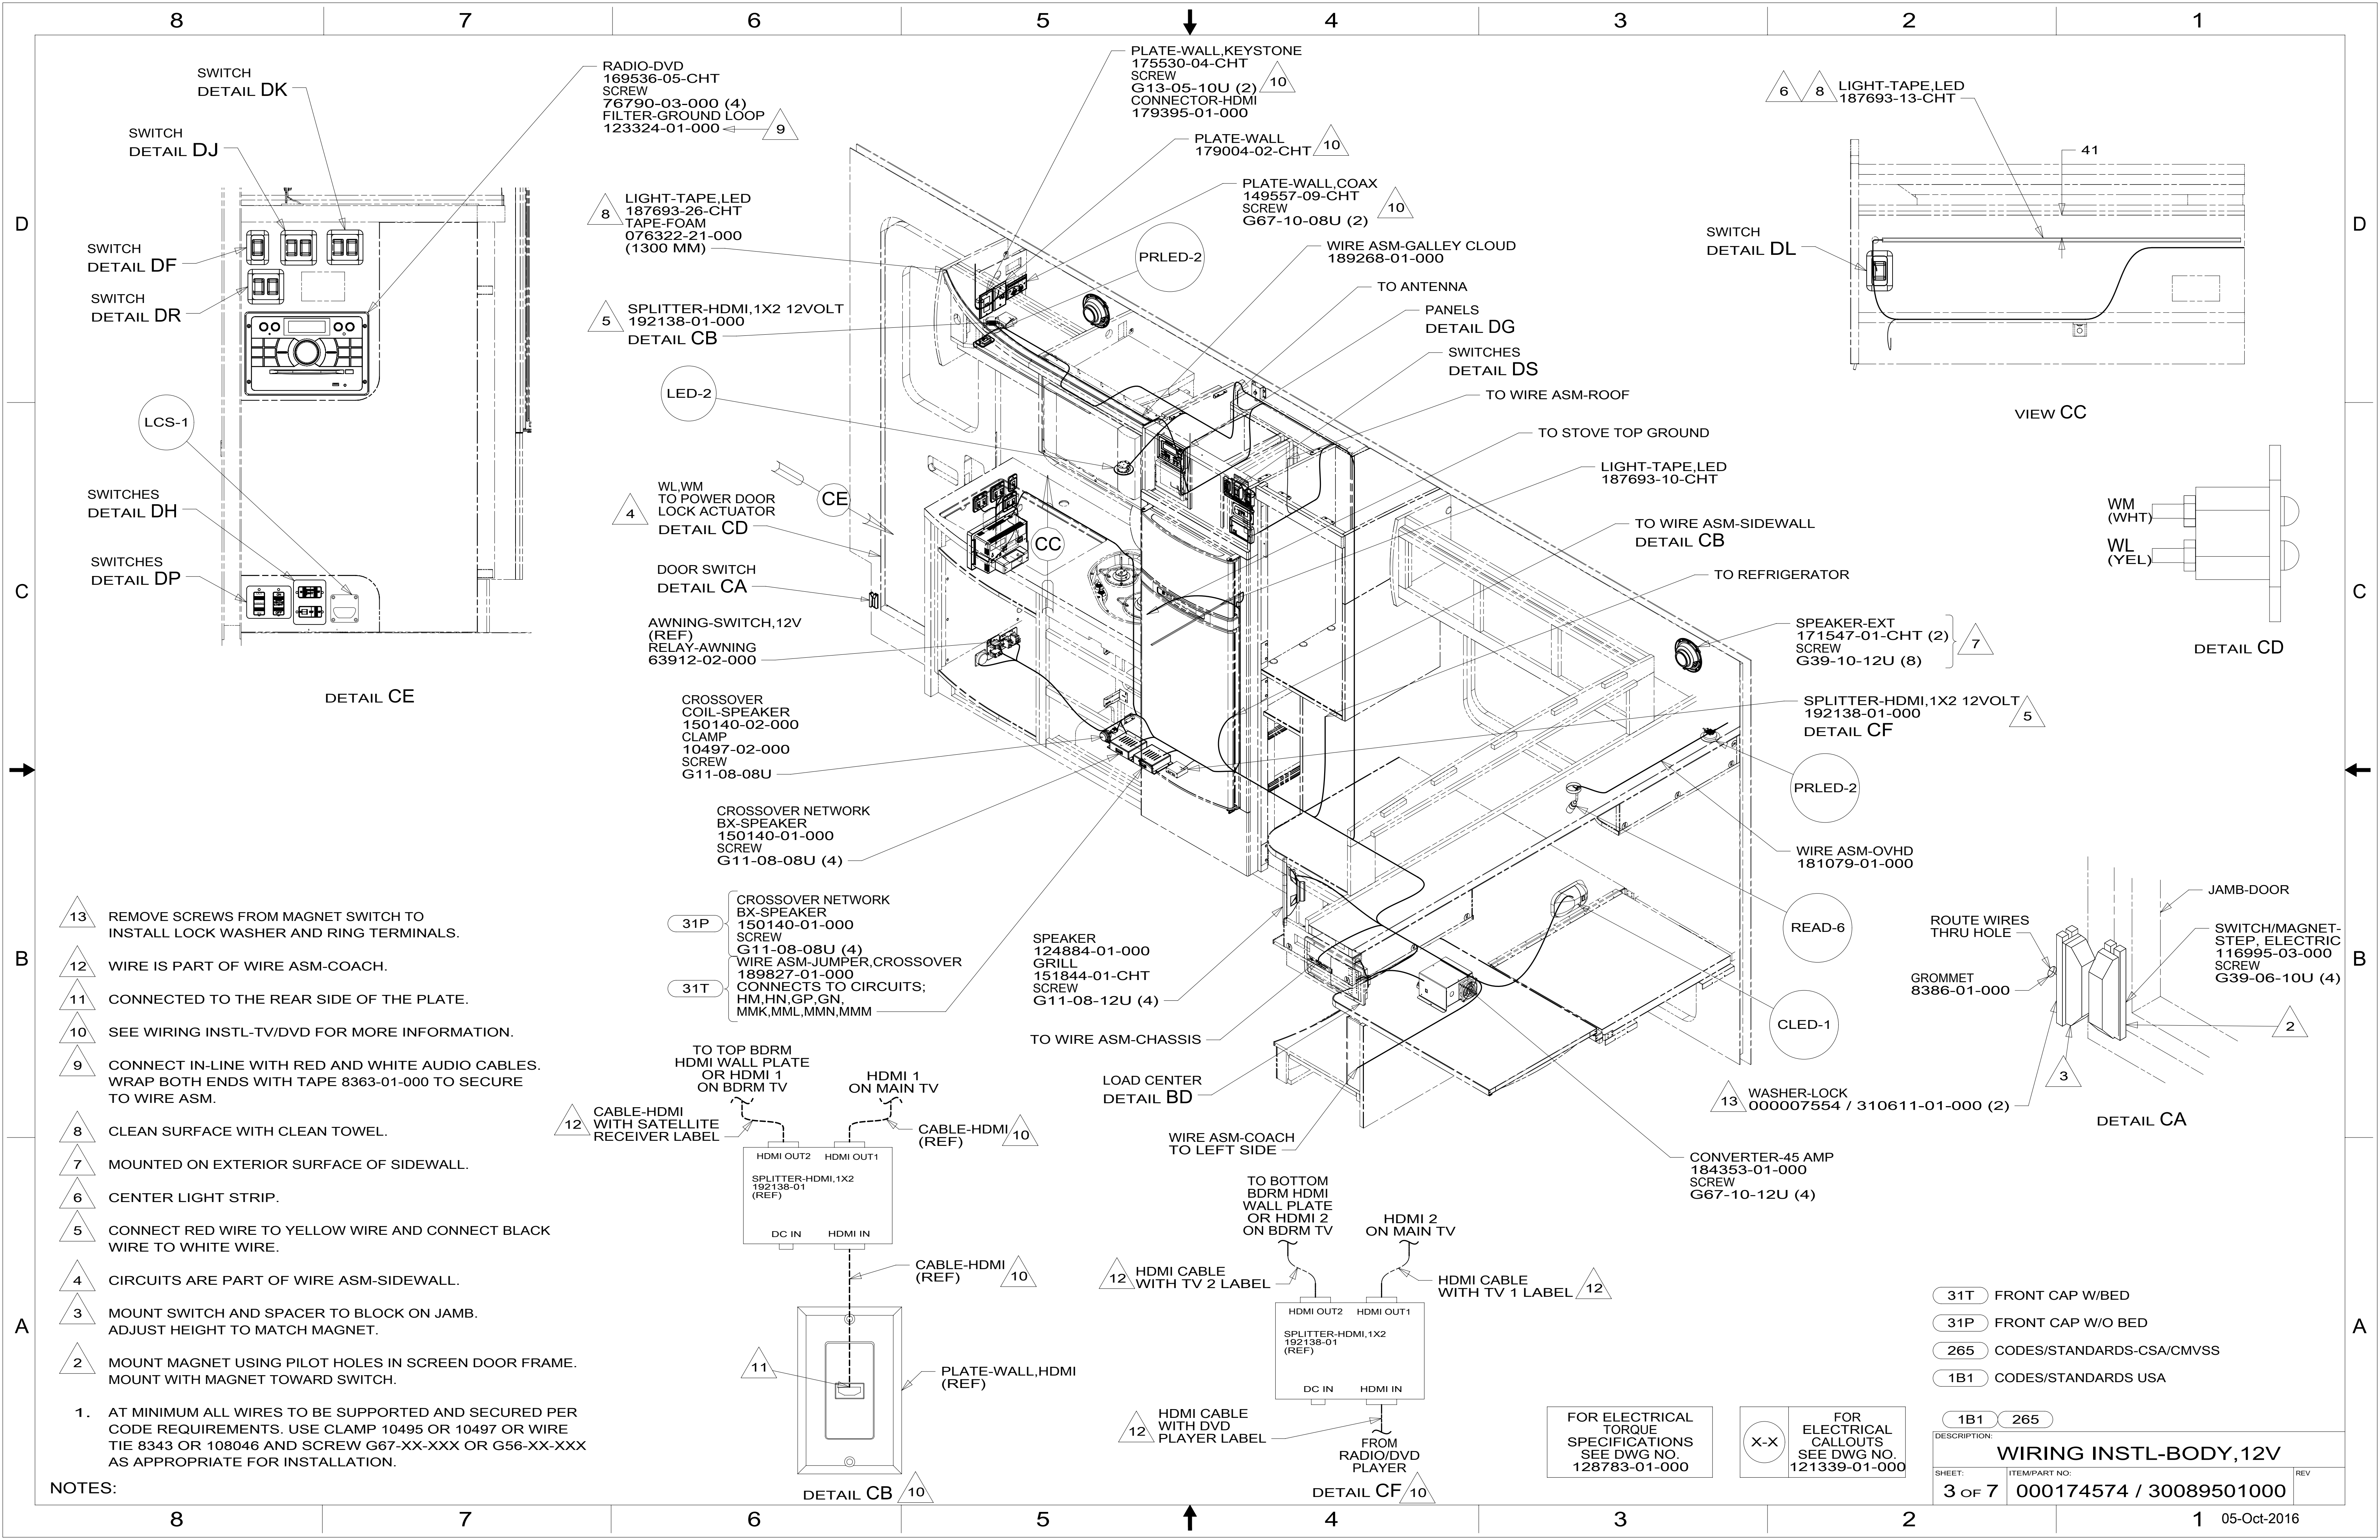

- 13 REMOVE SCREWS FROM MAGNET SWITCH TO INSTALL LOCK WASHER AND RING TERMINALS.
- 12 WIRE IS PART OF WIRE ASM-COACH.
- 11 CONNECTED TO THE REAR SIDE OF THE PLATE.
- 10 SEE WIRING INSTL-TV/DVD FOR MORE INFORMATION.
- 9 CONNECT IN-LINE WITH RED AND WHITE AUDIO CABLES. WRAP BOTH ENDS WITH TAPE 8363-01-000 TO SECURE TO WIRE ASM.
- 8 CLEAN SURFACE WITH CLEAN TOWEL.
- 7 MOUNTED ON EXTERIOR SURFACE OF SIDEWALL.
- 6 CENTER LIGHT STRIP.
- 5 CONNECT RED WIRE TO YELLOW WIRE AND CONNECT BLACK WIRE TO WHITE WIRE.
- 4 CIRCUITS ARE PART OF WIRE ASM-SIDEWALL.
- 3 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB. ADJUST HEIGHT TO MATCH MAGNET.
- 2 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

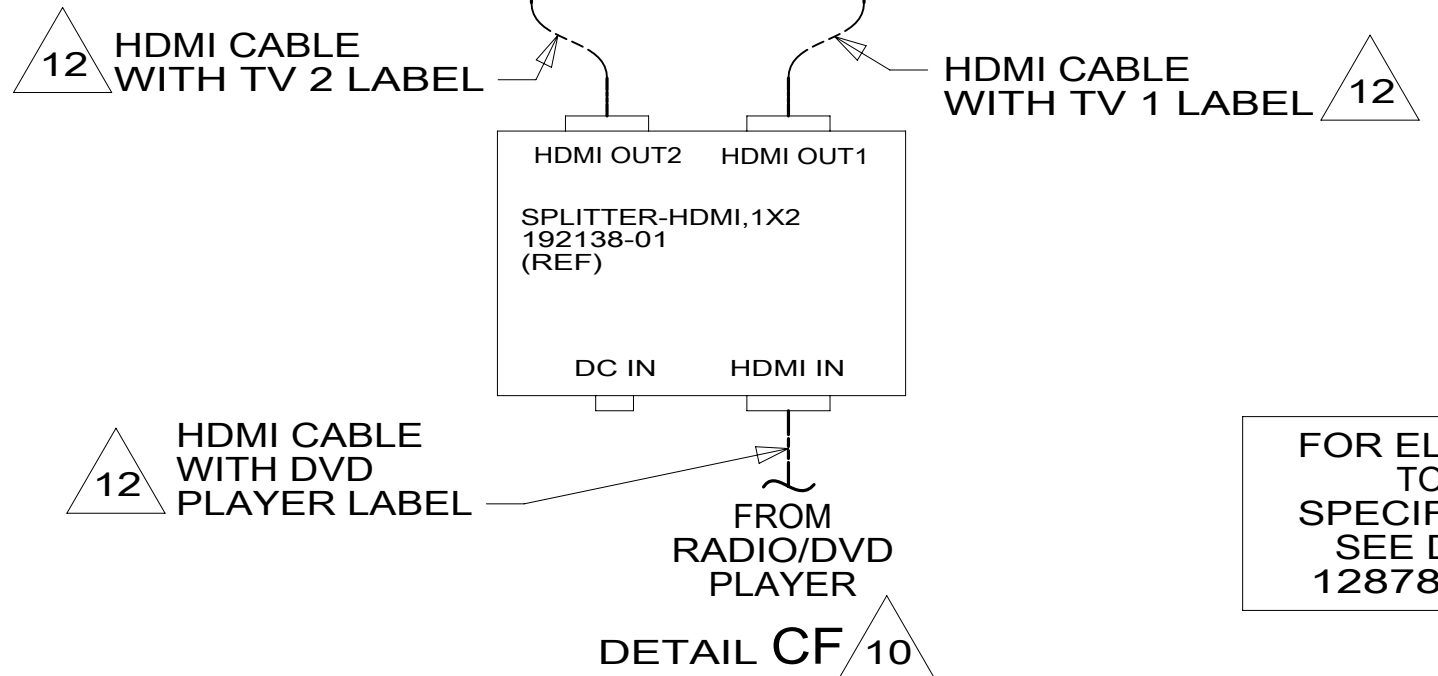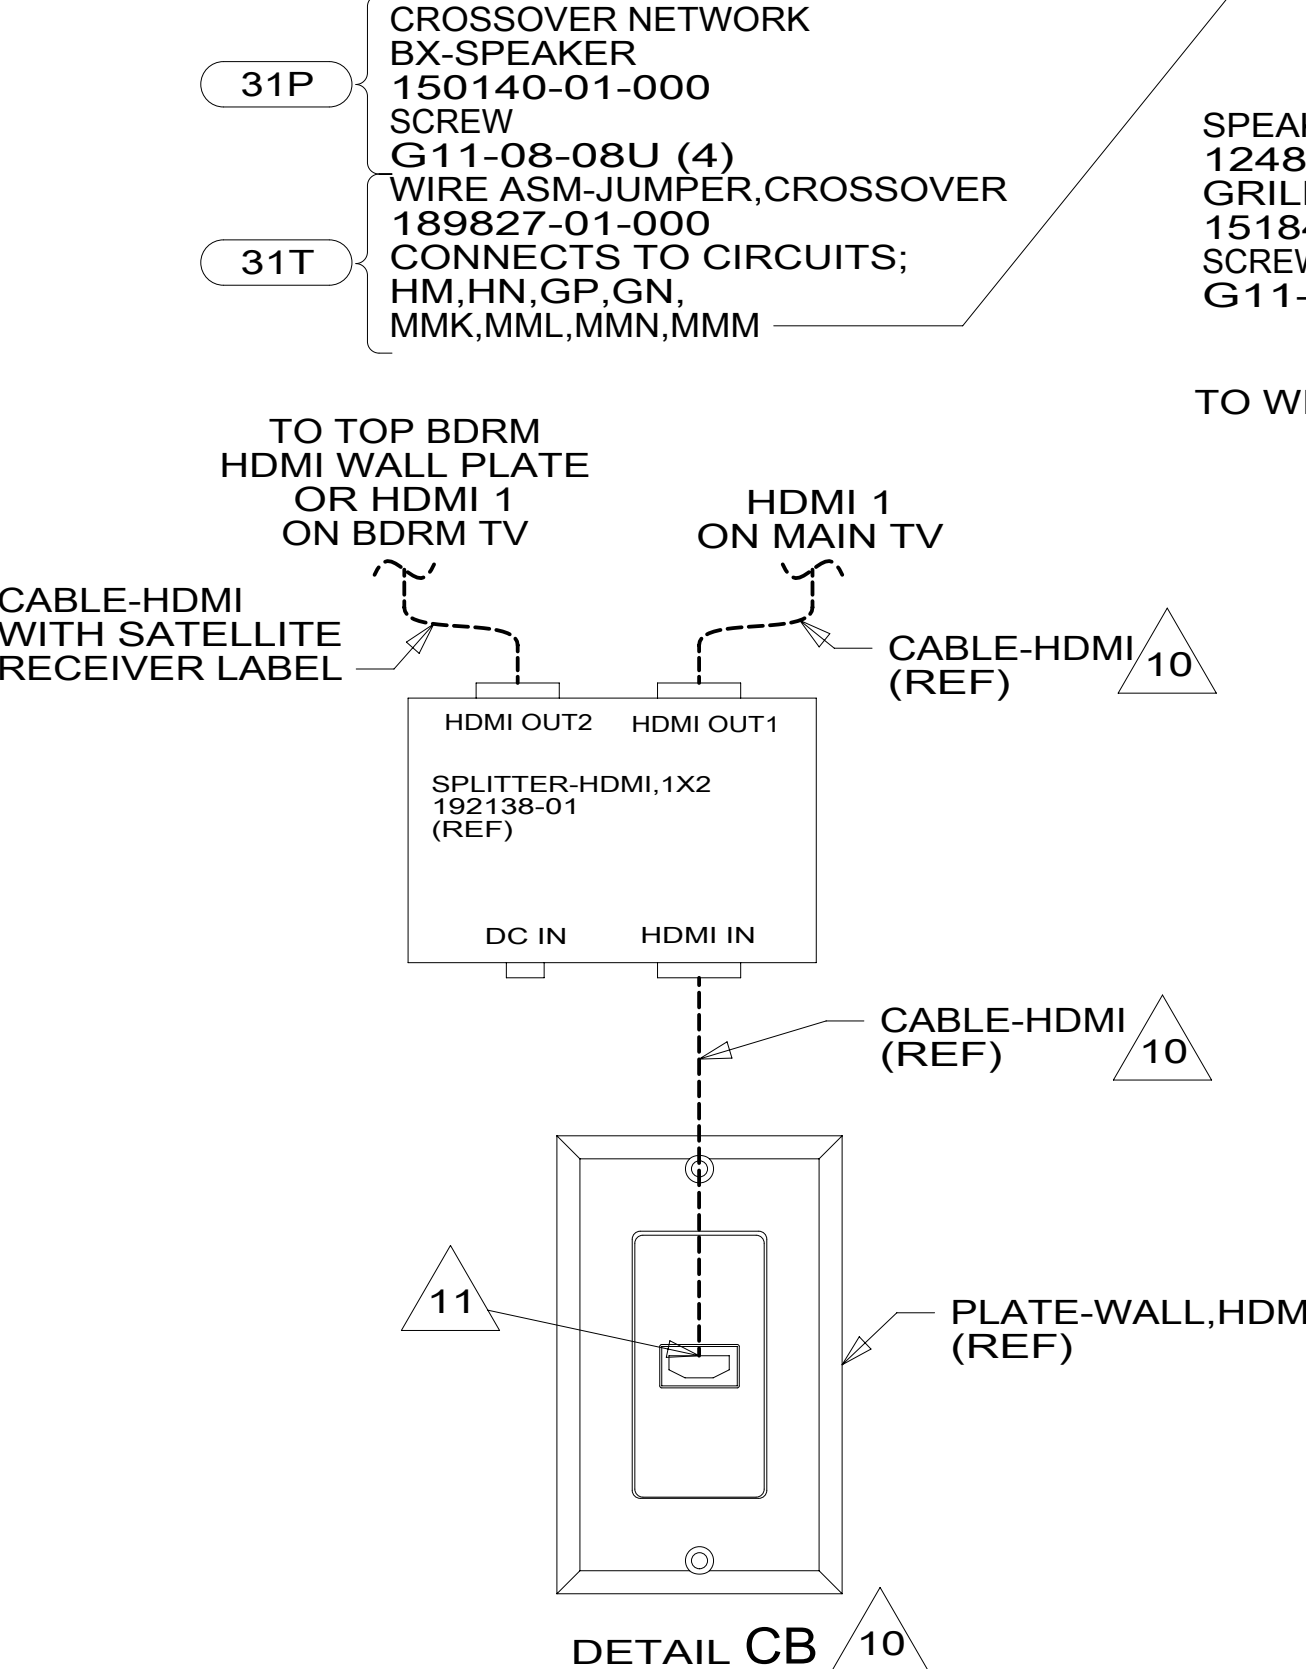

- 31T FRONT CAP W/BED
- 31P FRONT CAP W/O BED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: **WIRING INSTL-BODY, 12V**


SHEET: 3 OF 7 ITEM/PART NO.: 000174574 / 30089501000 REV: 1

05-Oct-2016

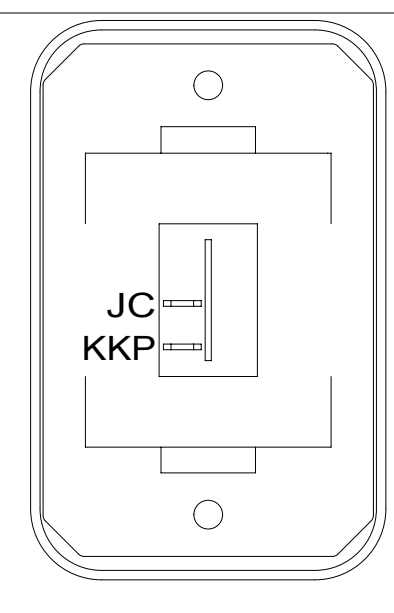


SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

DETAIL DA

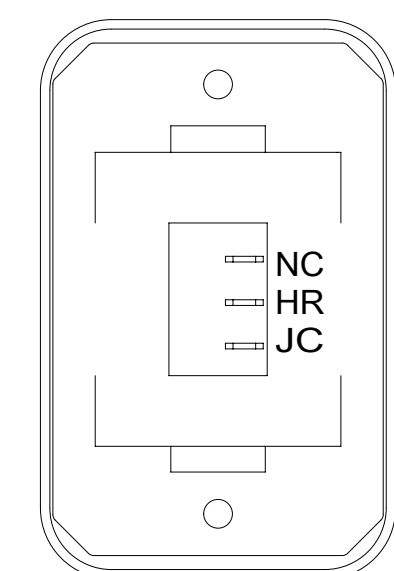


SWITCH-ROCKER
135740-06-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)
LABEL
134563-01-CHT

DETAIL DE 1JD

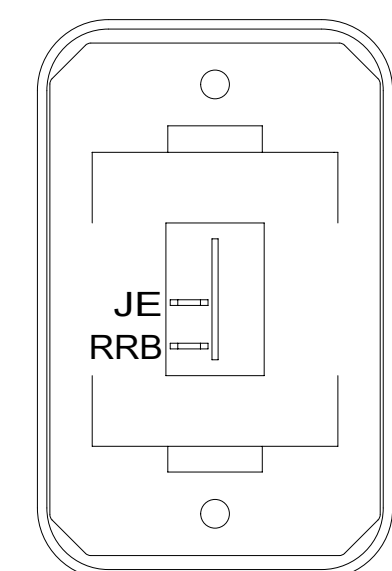

SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

DETAIL DL

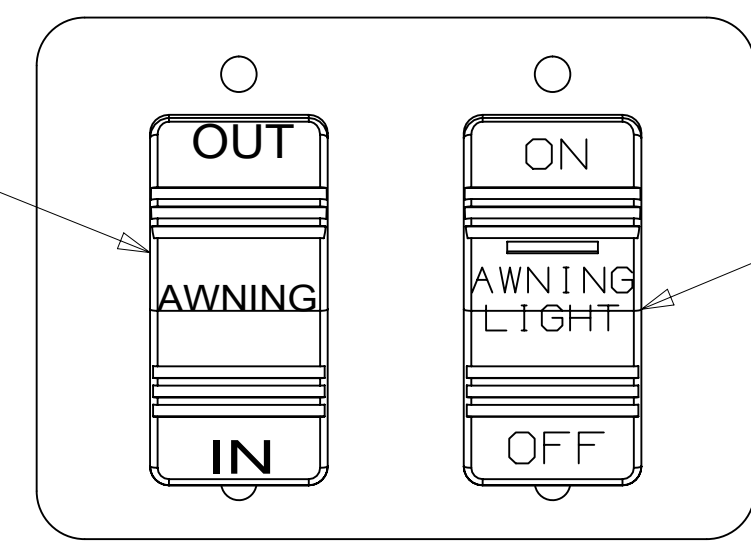


SWITCH-ROCKER
108357-06-000
ACTUATOR-SWITCH
108356-12-CHT

PLATE-SWITCH
158431-17-CHT
SCREW
G11-06-10U (4)

SWITCH-ROCKER
108357-14-000
ACTUATOR-SWITCH
108356-28-CHT

DETAIL DP

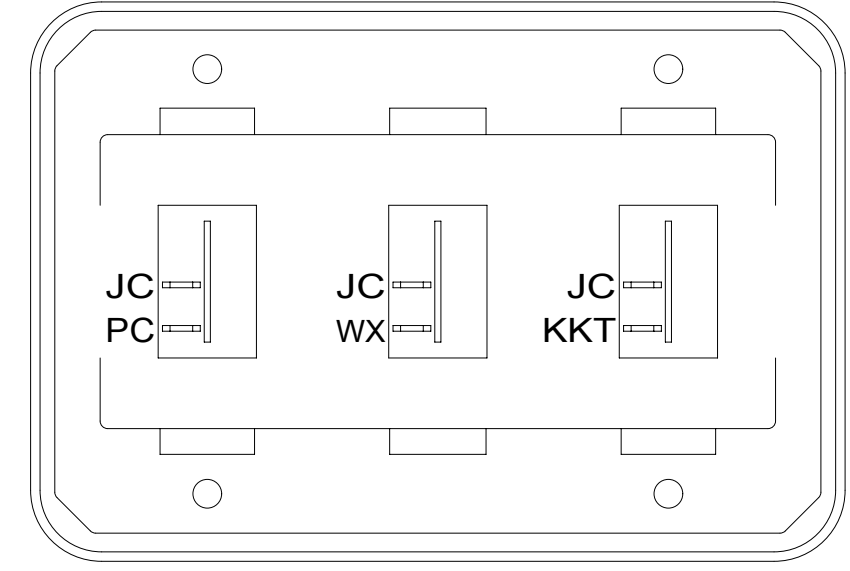


SWITCH-ROCKER
135740-01-CHT (3)
SWITCH-BASE
135741-03-CHT
SWITCH-BEZEL
135742-03-CHT
SCREW
G11-08-08U (4)

DETAIL DB


HOLDING TANK HEATER
TURN OFF When Not In Use
SEE OPERATORS MANUAL

DETAIL DE 23T OR 23R

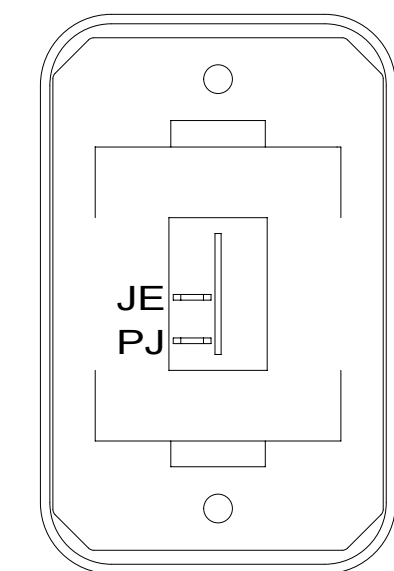


SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

DETAIL DF

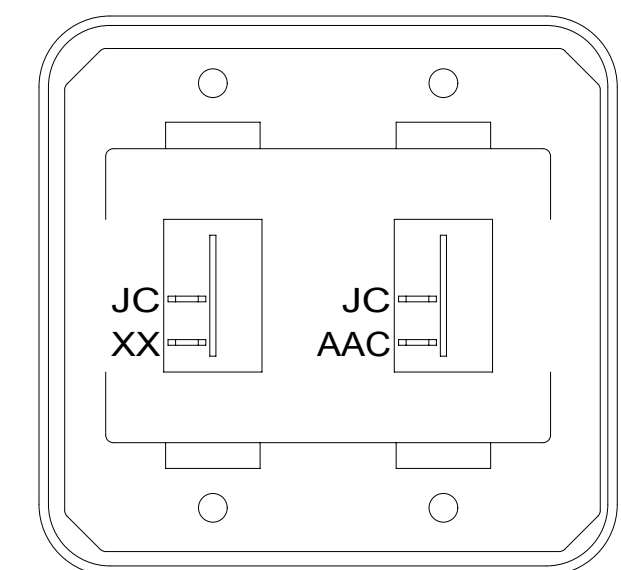


SWITCH-ROCKER
135740-01-CHT (2)
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-02-CHT
SCREW
G11-08-08U (4)

DETAIL DJ

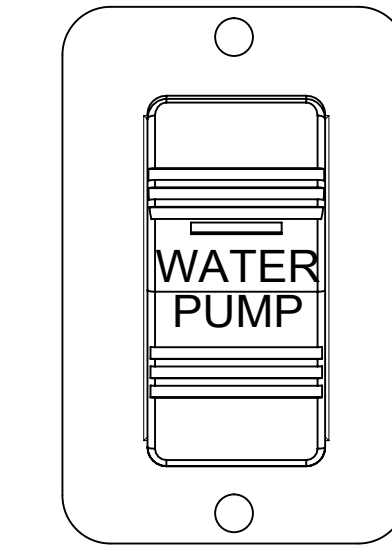


SWITCH-ROCKER
108357-21-000
ACTUATOR-SWITCH
108356-23-CHT
PLATE-SWITCH
144363-02-CHT
SCREW
G11-06-10U (2)

DETAIL DM

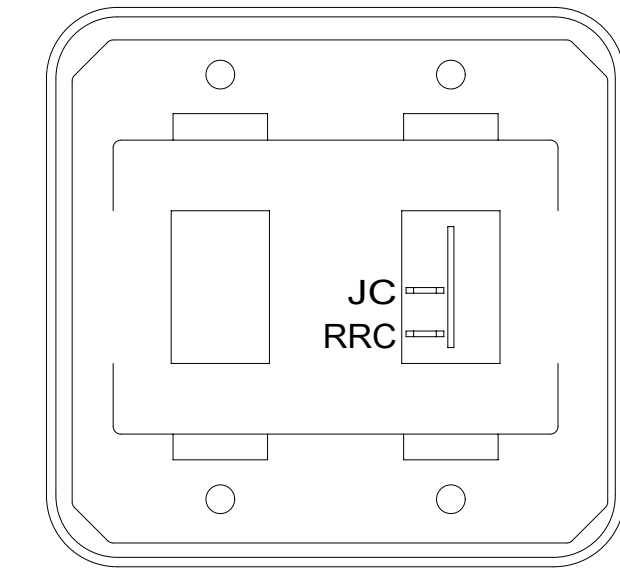


SWITCH-ROCKER
135740-01-CHT
SWITCH-BLANK
138253-01-CHT
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-02-CHT
SCREW
G11-06-16U (4)

DETAIL DR 41M

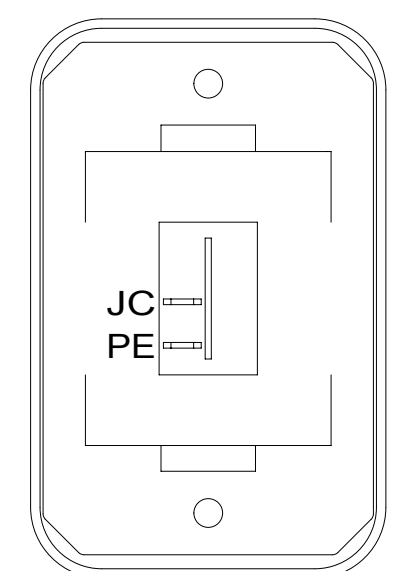

SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)


DETAIL DC

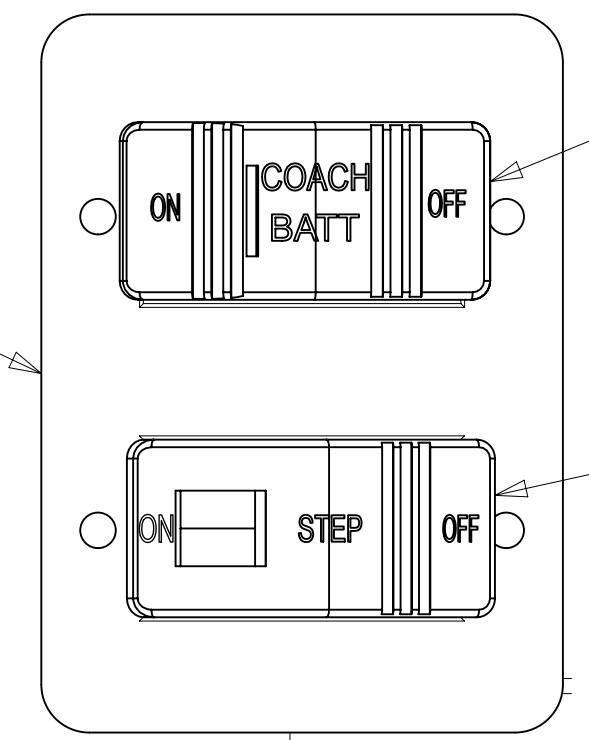

SWITCH-BATTERY
108357-18-000
ACTUATOR-SWITCH
108356-19-CHT
(CIRCUITS LH,LJ
LG,NF,JF)
WIRE ASM-THERM
186796-01-000


ACTUATOR-SWITCH
108357-19-000
(CIRCUITS ER,ES)

DETAIL DH

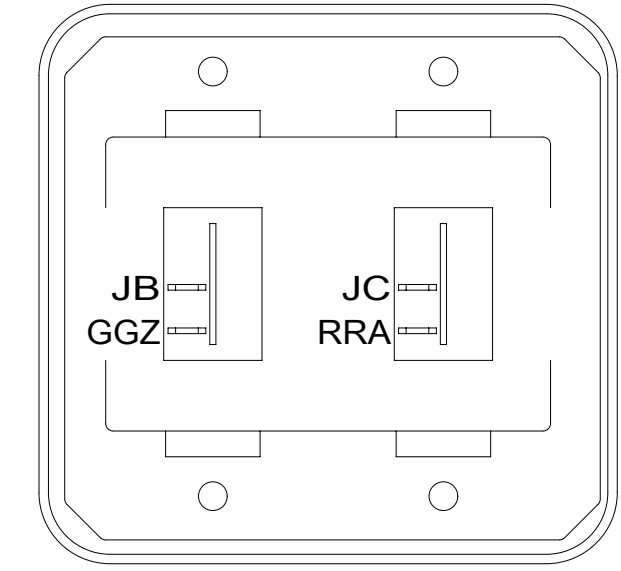


SWITCH-ROCKER
135740-01-CHT (2)
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-02-CHT
SCREW
G11-08-08U (4)

DETAIL DK

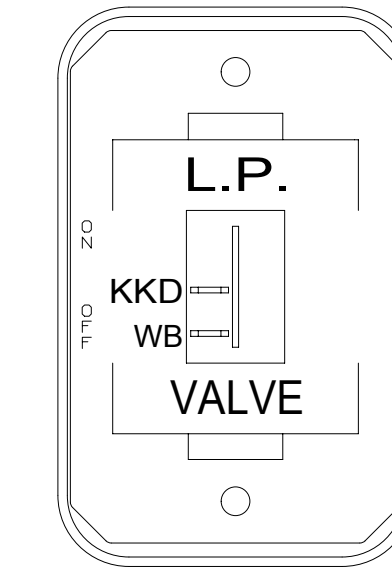


SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-59-CHT
SCREW
G11-08-08U (2)

DETAIL DN

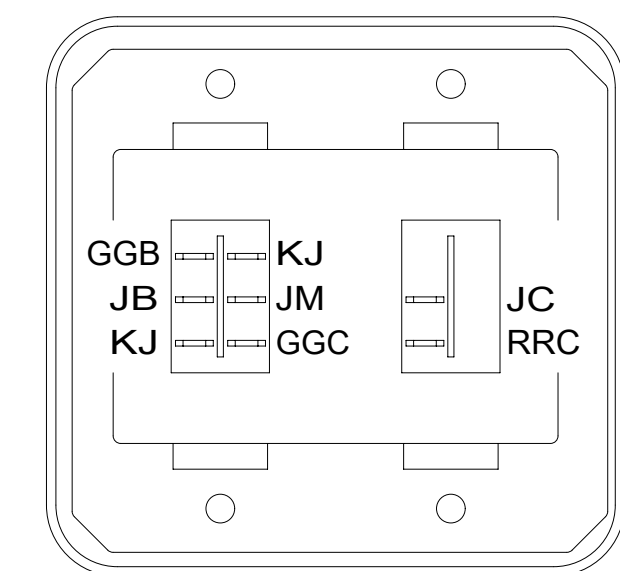

SWITCH-ROCKER
135740-01-CHT
SWITCH-BLANK
135740-03-CHT
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-02-CHT
SCREW
G11-06-16U (4)

DETAIL DR 316

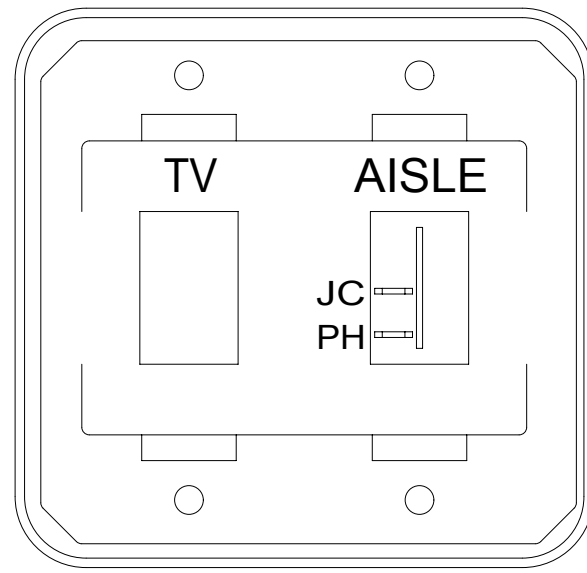


SWITCH-BLANK
138253-01-CHT
SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-44-CHT
SCREW
G11-06-16U (4)


DETAIL DD

53B 52G MONITOR PANEL
175724-01-000
53B 33F 175724-02-000
1BU 52G 175724-04-000
1BU 33F 175724-05-000
SCREW
G11-08-12U (4)

CONTROL-CHARGE,
SOLAR 30 AMP
191278-01-000
SCREW
G11-08-08U (2)
DETAIL EB

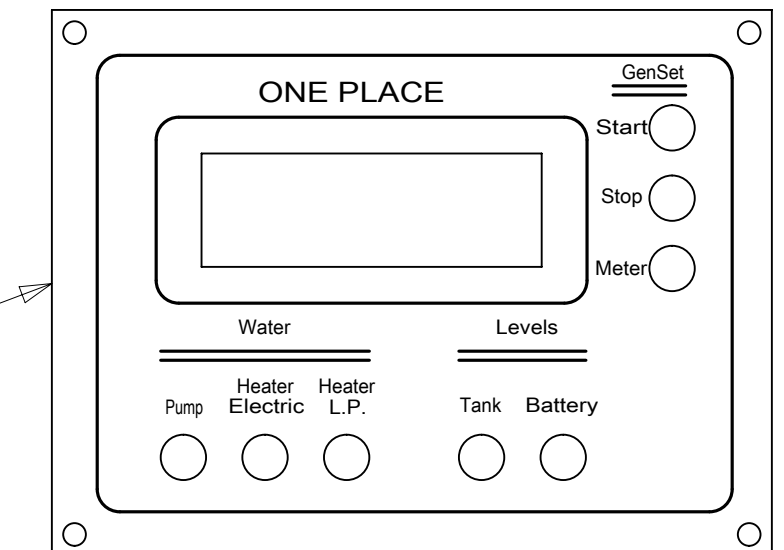


DETAIL DG

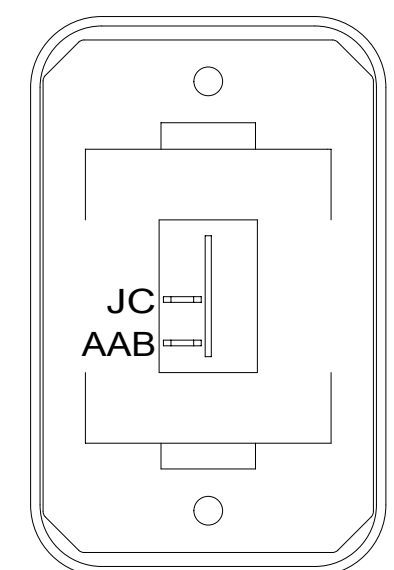

SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

DETAIL DT

SWITCH-ROCKER
108357-07-000
ACTUATOR-SWITCH
108356-24-CHT
PLATE-SWITCH
144363-02-CHT
SCREW
G11-08-10U (2)
(CIRCUITS DR,AEY,DU)

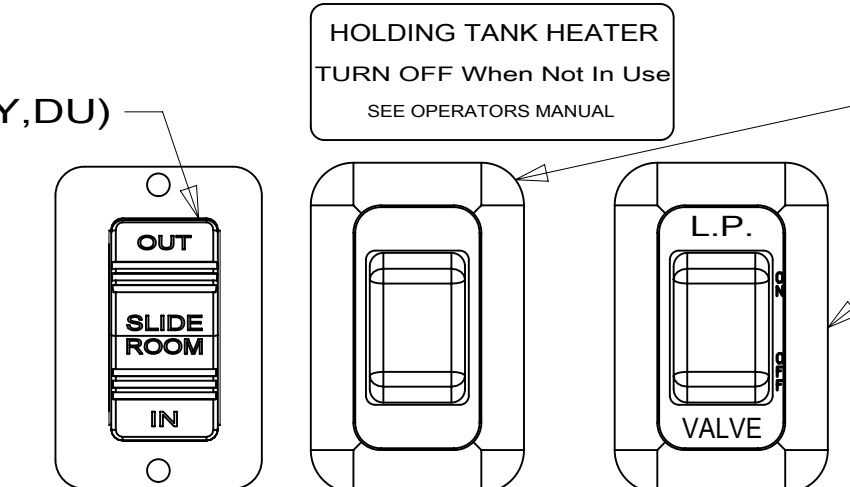

DETAIL DS


HOLDING TANK HEATER
TURN OFF When Not In Use
SEE OPERATORS MANUAL

SWITCH
DETAIL DE


SWITCH
DETAIL DN

WARNING CRUSH HAZARD: Keep people and objects clear of the inside and the outside of the slideout room when operating. Failure to comply could result in death or serious injury.

LABEL-WARNING,SLIDEOUT
116549-01-000

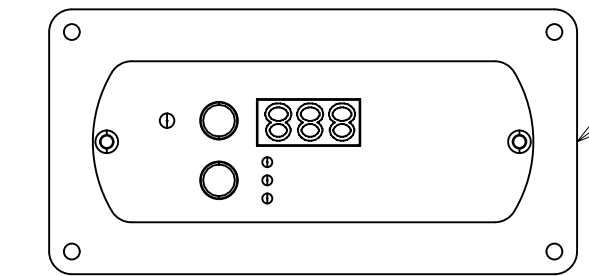

REMOTE PANEL-INVERTER
(SUPPLIED WITH INVERTER)
MODULE-12V DISC
173355-01-000

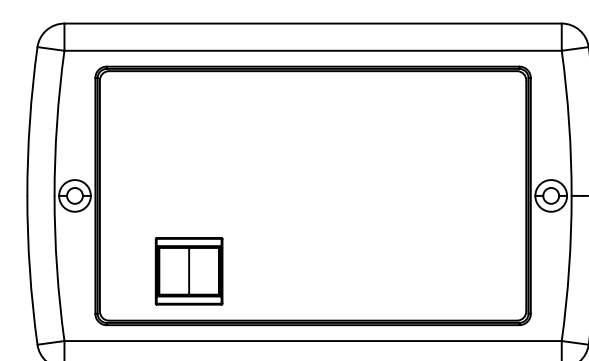

CONTROL-GENERATOR
(REFERENCE)


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 3AA SOLAR PANEL/BATT CHARGER SYS
- 1BU WTR HTR TKLS W/RECIRCUL PUMP
- 53B WTR HTR-6GAL ELECTRIC/LP GAS
- 52G GEN-3.6KW ONAN LP MICROQUIET
- 33F GEN-3.2 KW ONAN DIESEL
- 316 SKYLIGHT/ROOF VENT, POWER
- 41M VENT-POWER VENTILATOR
- 1JD DRAINAGE SYSTEM-HEATED-W/O
- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 23T DRAINAGE SYSTEM-HEATED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-BODY, 12V	
SHEET: 4 OF 7	ITEM/PART NO: 000174574 / 30089501000
REV 05-Oct-2016	

NOTES:
1 SUPPLIED WITH GENERATOR.

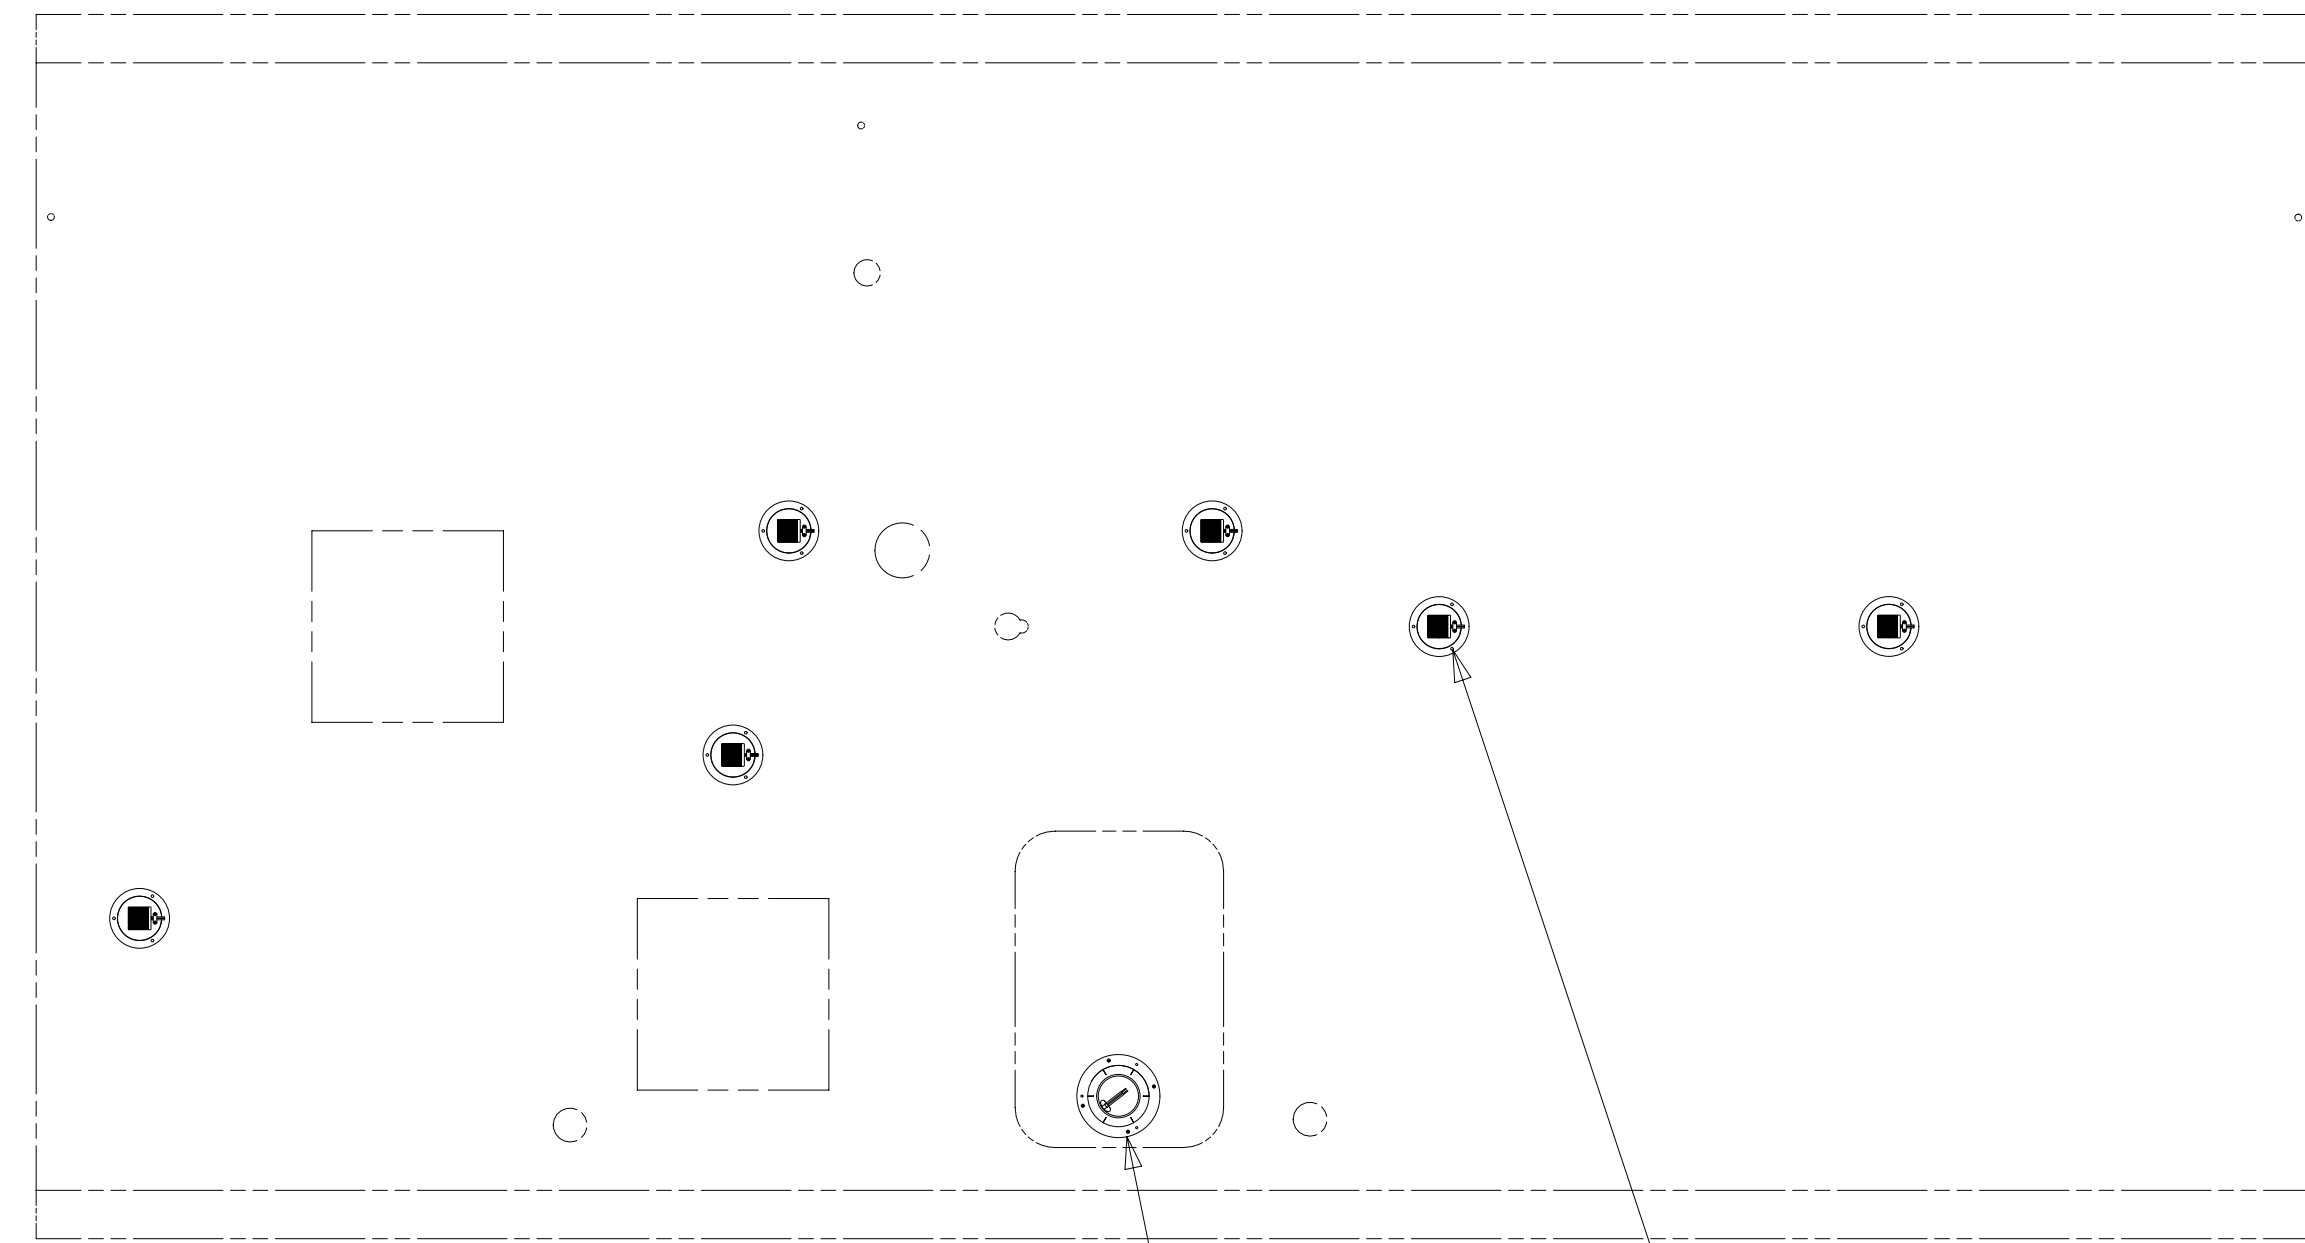

LSH-3

PRLED-4
6

282
OR
3AA
PANEL-SOLAR 100 WATT
191276-01-CHT
MOUNTING FEET-SOLAR,QTY 4
000031418 / 316962-01-000
SCREW
G39-10-10U (8)

282
OR
3AA
WIRE ASM-SOLAR
EXT.10 FOOT
195056-01-000

3AA
PANEL-SOLAR 100 WATT
191276-01-CHT
MOUNTING FEET-SOLAR,QTY 4
000031418 / 316962-01-000
SCREW
G39-10-10U (8)

3AA
WIRE ASM-SOLAR
EXT.10 FOOT
195056-01-000

3AA
OR
282
PORT-SOLAR,
3 POSITION
191277-01-CHT
DETAIL ED

3AA
PANEL-SOLAR 100 WATT
191276-01-CHT
MOUNTING FEET-SOLAR,QTY 4
000031418 / 316962-01-000
SCREW
G39-10-10U (8)


DETAIL EC

BATTERY CONNECTION SOLAR PANEL CONNECTION

4 8 BLK 5 8 BLK & 10 YEL
4 8 GRN 5 8 GRN & 10 WHT
WIRE ASM-COACH WIRE ASM-COACH

DETAIL EB 3AA OR 282


- NOTES:
- 7 COIL CABLE UP HERE AND ATTACH TO INSIDE OF SOLAR PANEL LEG WITH 008343-04-000.
 - 6 PLACE ROOF SEALANT HERE (APPROXIMATELY 75MM WIDE) AND PUSH THE CABLES INTO THE SEALANT TO STABILIZE THEM.
 - 5 WIRE IS MARKED WITH YELLOW TAPE.
 - 4 WIRE IS MARKED WITH GOLD TAPE.
 - 3 REMOVE GROUND WIRE FROM ANTENNA BASE.
 - 2 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.
 - 1 WRAP BRACKET LEGS AROUND ANTENNA BASE.

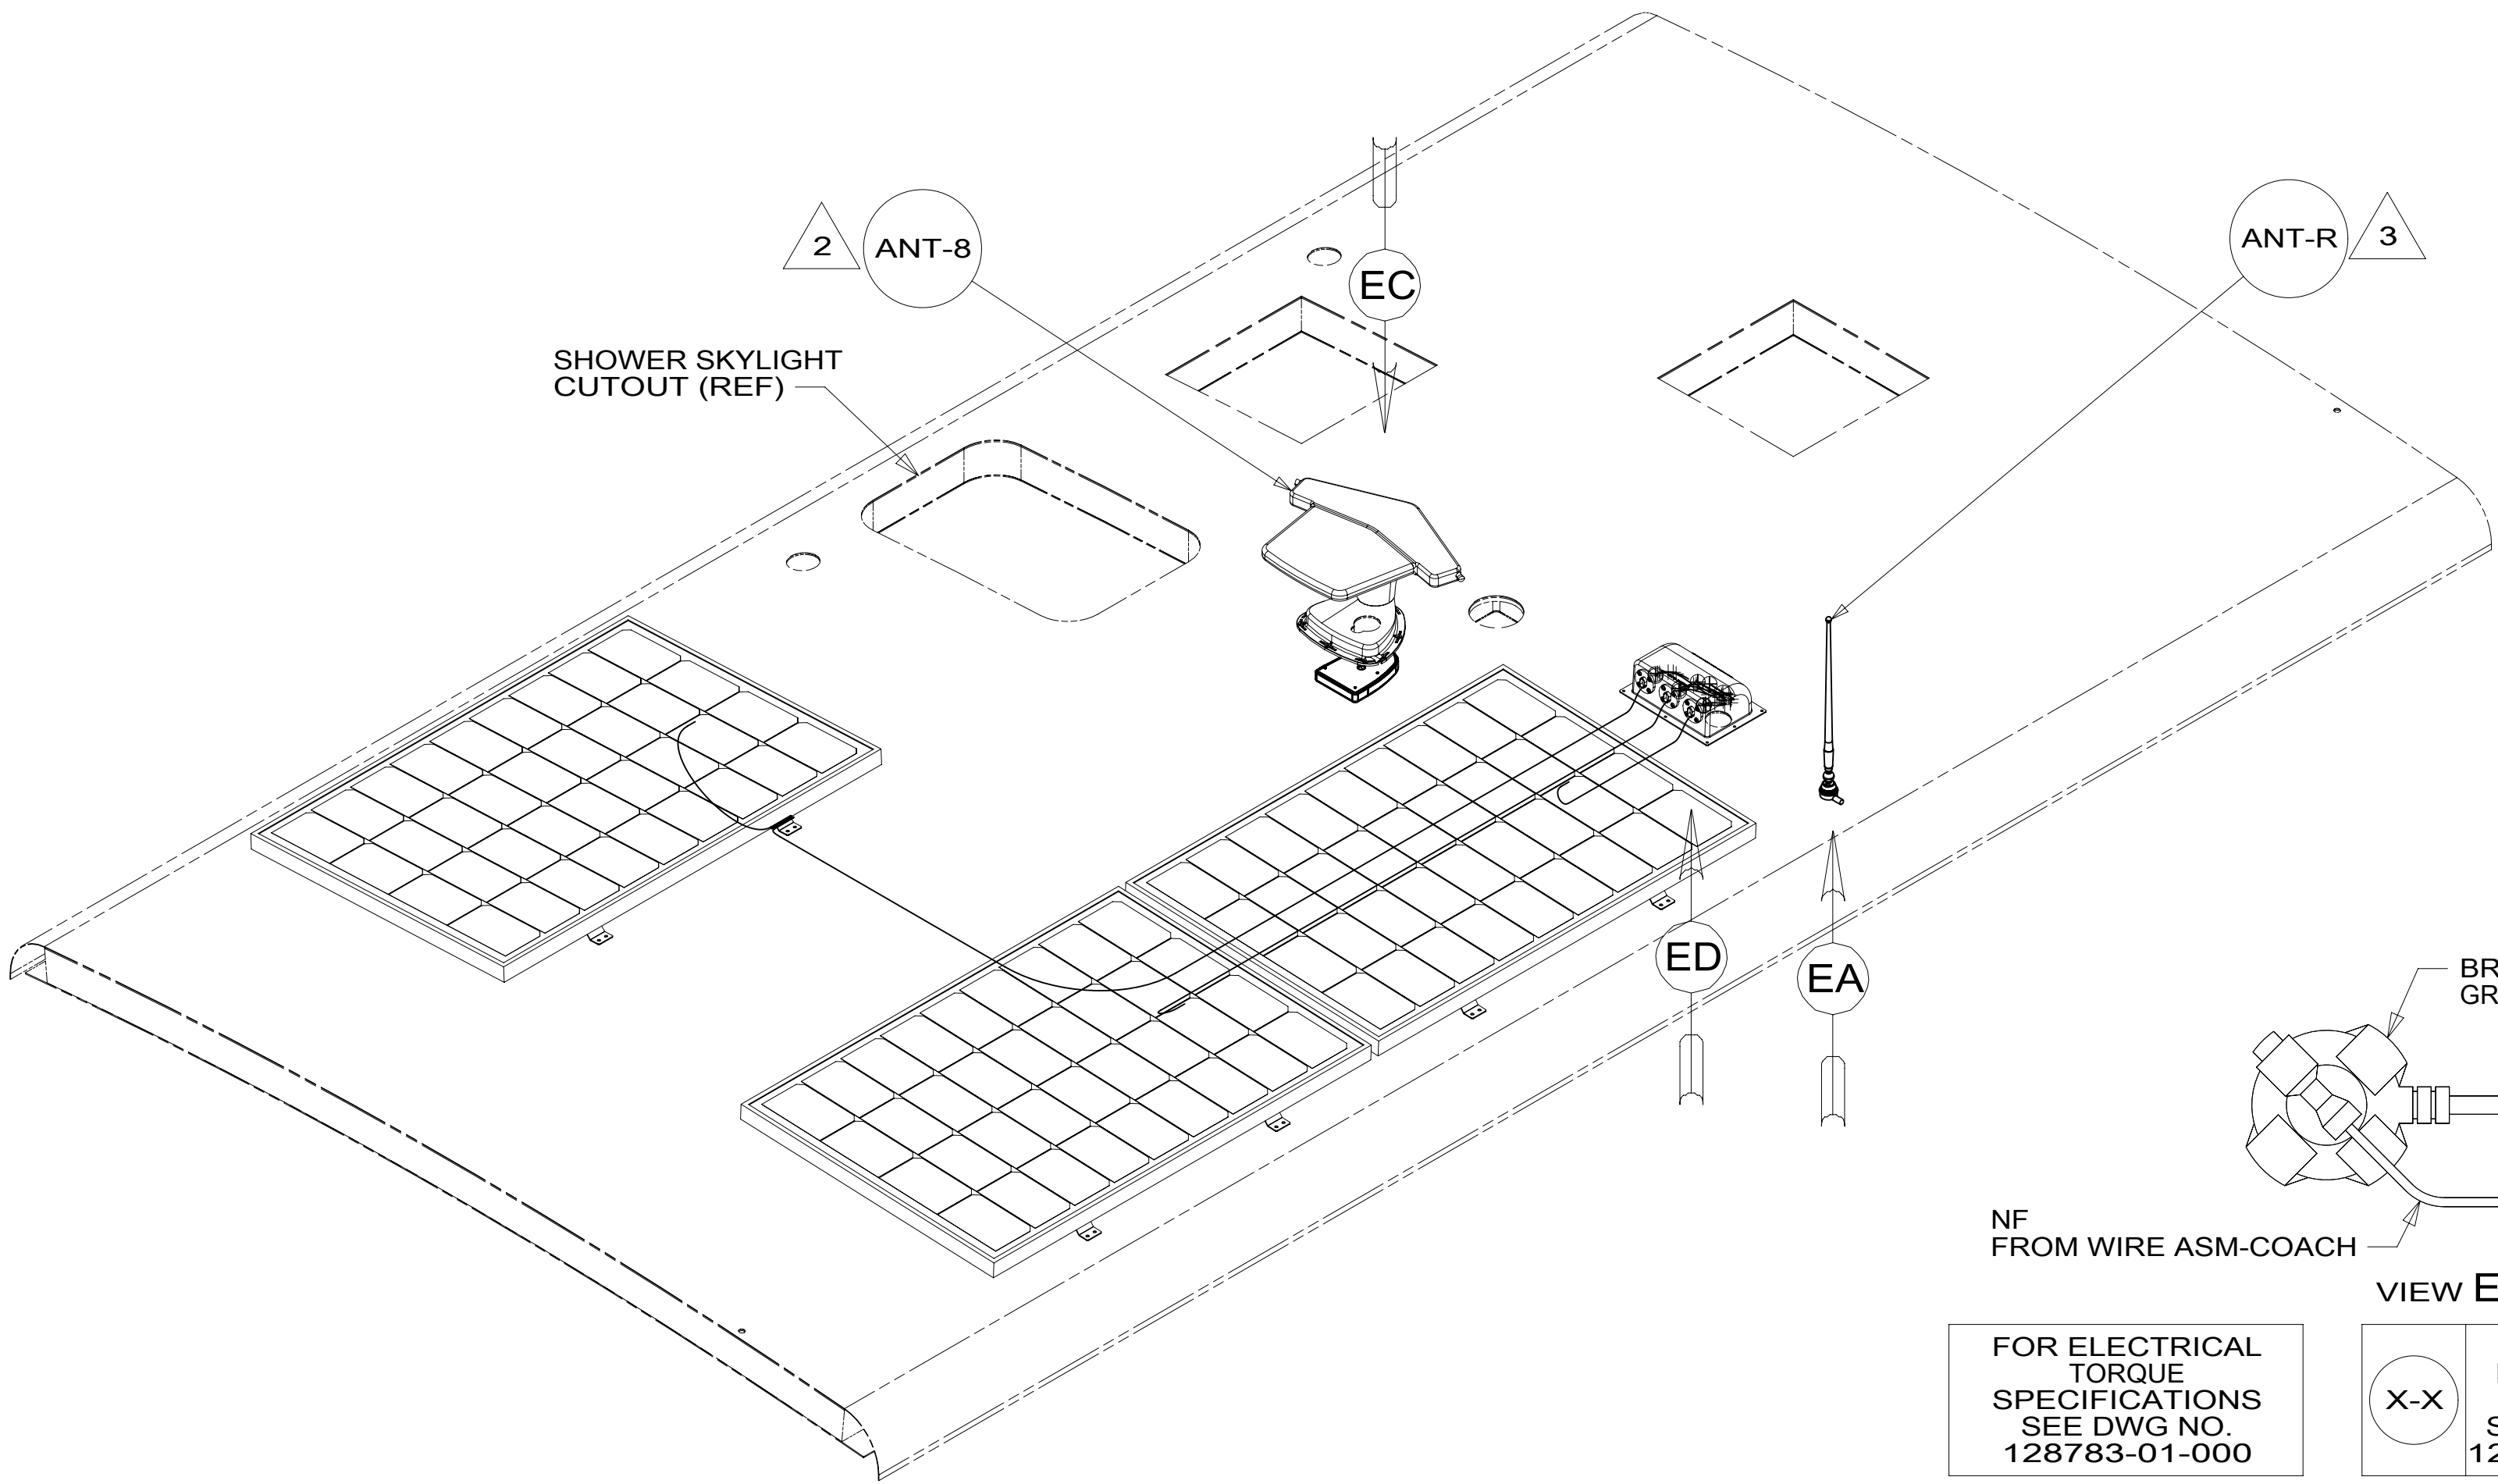

8 BLK TO EMPTY POST ON 30A BREAKER
8 GRN TO GROUND STUD (STACK GROUND WIRES)

WIRE ASM-COACH PORT-SOLAR (REF)

DETAIL ED 3AA OR 282

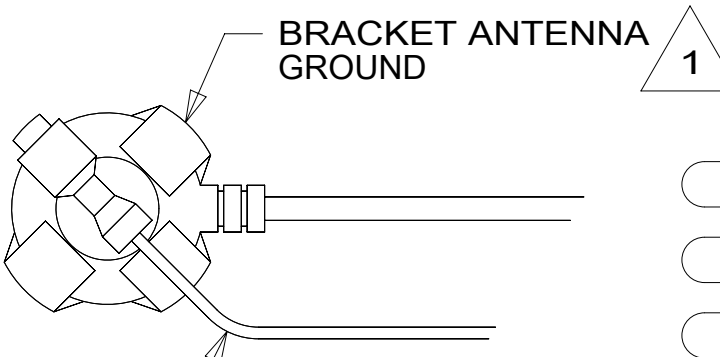


VIEW EA

NF FROM WIRE ASM-COACH
FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 3AA SOLAR PANEL/BATT CHARGER SYS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-BODY,12V		
SHEET: 5 OF 7	ITEM/PART NO.: 000174574 / 30089501000	REV

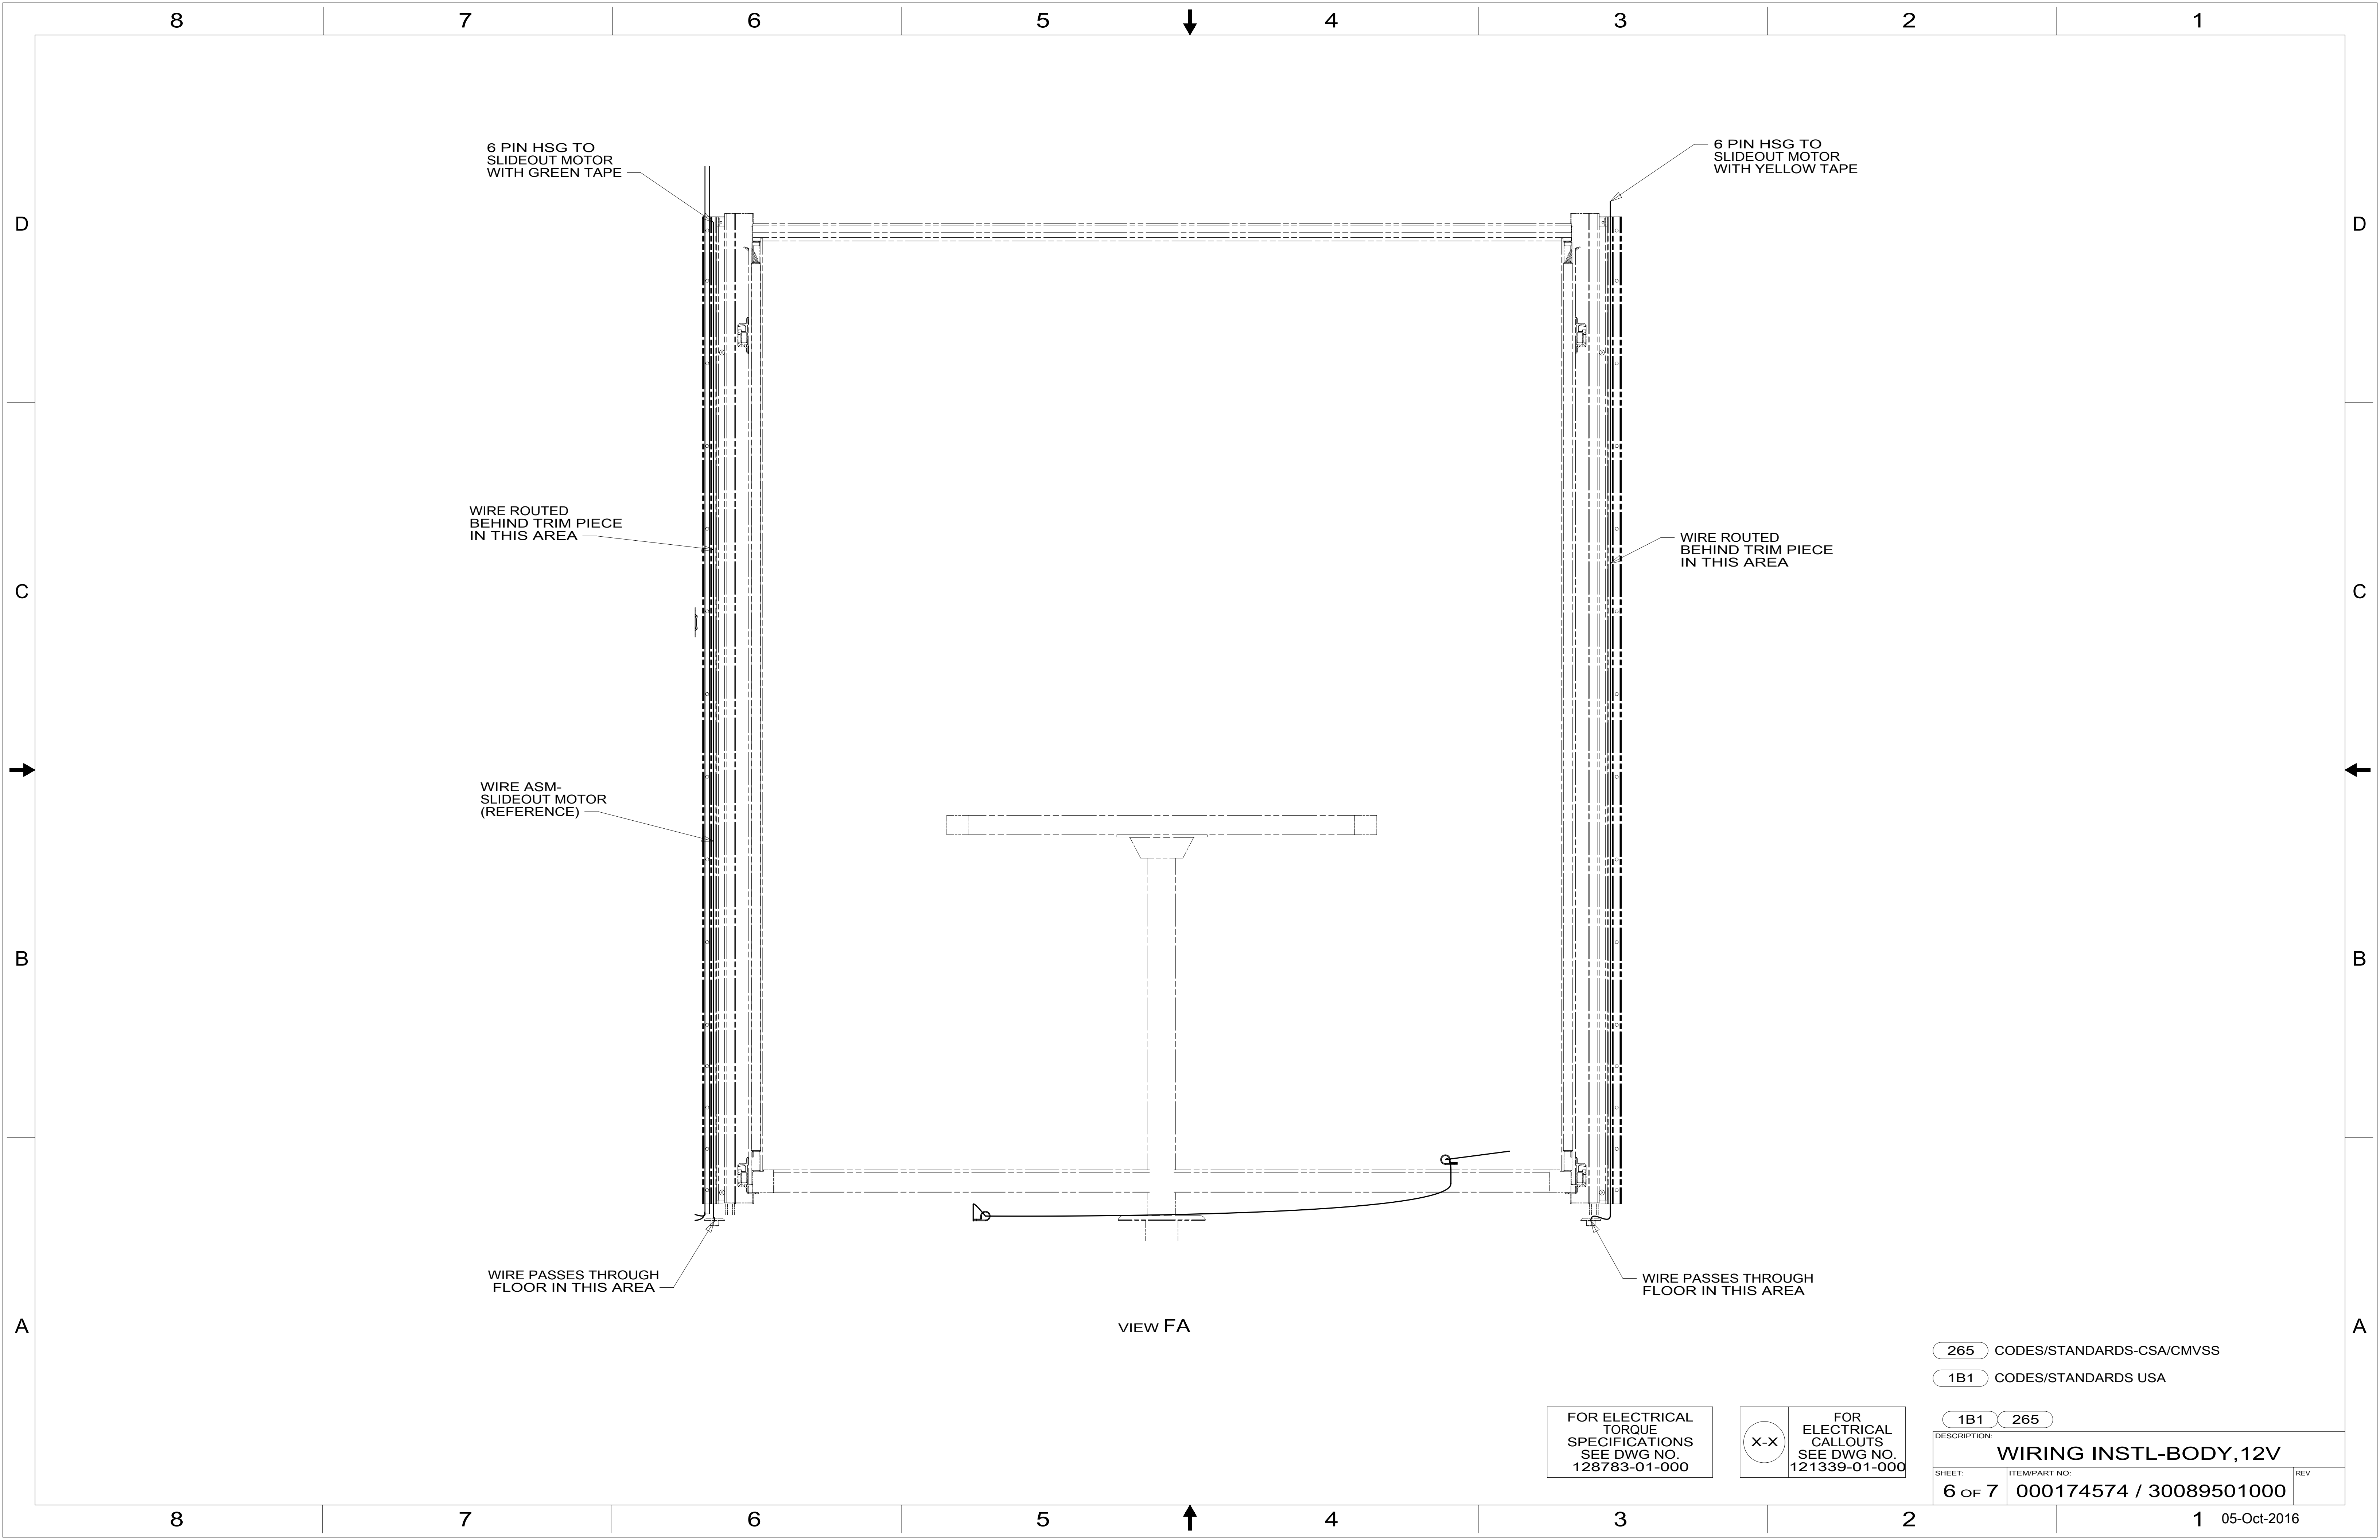

6 PIN HSG TO SLIDEOUT MOTOR WITH GREEN TAPE

6 PIN HSG TO SLIDEOUT MOTOR WITH YELLOW TAPE

WIRE ROUTED BEHIND TRIM PIECE IN THIS AREA

WIRE ROUTED BEHIND TRIM PIECE IN THIS AREA

WIRE ASM-SLIDEOUT MOTOR (REFERENCE)

WIRE PASSES THROUGH FLOOR IN THIS AREA

WIRE PASSES THROUGH FLOOR IN THIS AREA

VIEW FA

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: **WIRING INSTL-BODY, 12V**

SHEET: 6 OF 7 ITEM/PART NO.: 000174574 / 30089501000 REV