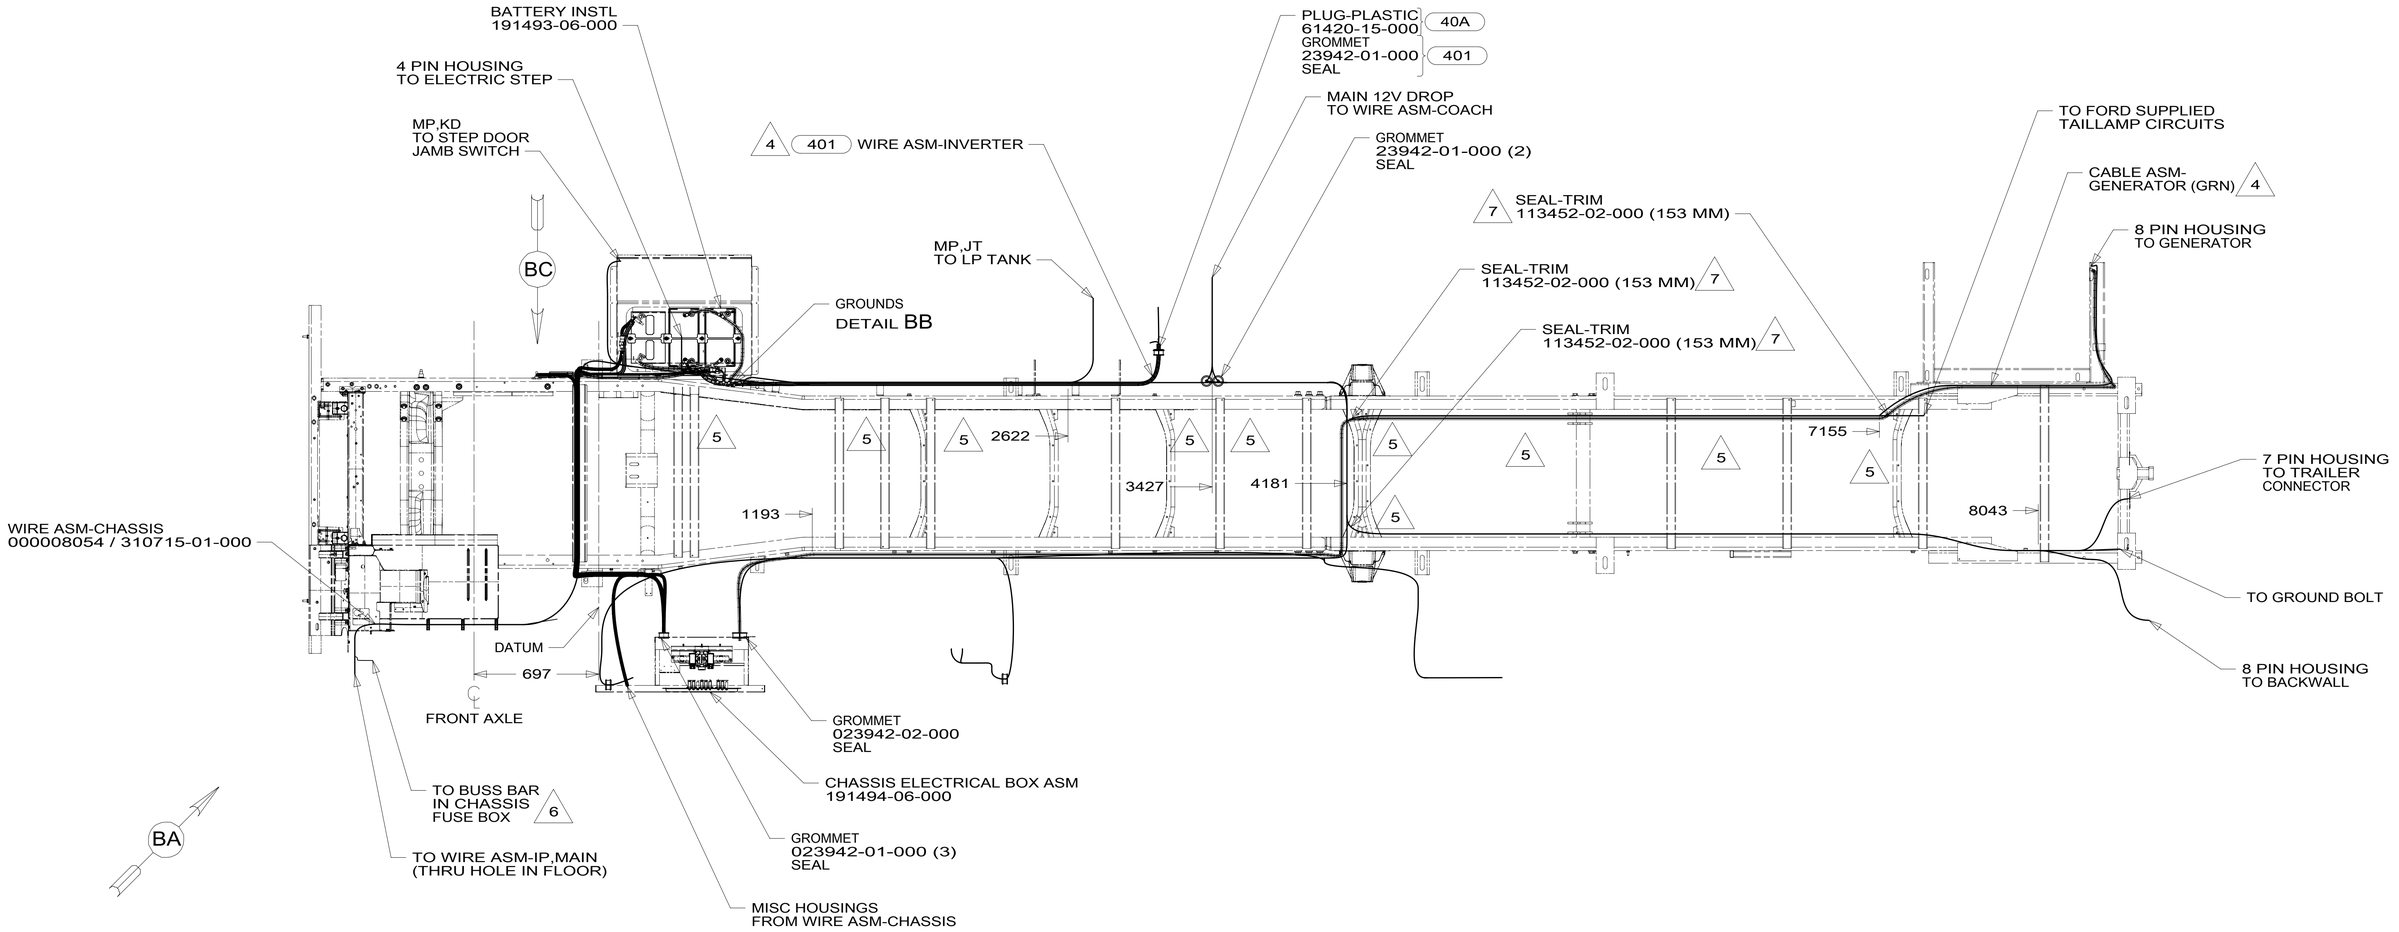

7 COVER SHARP EDGES WHERE WIRE CROSSES FRAME RAILS.

6 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.

5 CLAMP 83610-01-000, SCREW G11-10-16B.

4 SEE BATTERY INSTL FOR ADDITONAL INFORMATION.

3. WIRE TIE 8343-04-000. FASTEN EVERY 600MM MINIMUM.

2. ALL DIMENSIONS ARE FROM DATUM UNLESS OTHERWISE SPECIFIED.

1. SECURE CONDUIT 41953, TAB AS REQUIRED,
OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

NOTES:

401 INVERTER-DC/AC, 1000 WATT

40A INVERTER-DC/AC WITHOUT

16L FORD 22,000#-22.5 AL WHL

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 16L

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:

DFTR:

ALL DIMENSIONS ARE IN MILLIMETERS

UNSPECIFIED TOLERANCES:	
WHOLE DIM (X) ±	3
ONE-PLACE (X.X) ±	1.5
TWO-PLACE (X.XX) ±	0.50
ANGLE ±	1°

MATERIAL:

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES

WEIGHT: (LBS)

FIRST USED:

DESCRIPTION:

WIRING INSTL-CHASSIS

SHEET: 1 OF 2

ITEM/PART NO: 000175199 / 30055601000

REV: 1

REF:

20-Sep-2016