


- 4 NOT USED WITH 1DF
ROUTE WIRES INTO SLIDEROOM FOR IN-WALL EXTERIOR TV.
- 3 WIRE PASSES THROUGH FLOOR IN THIS AREA.

2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASS OVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

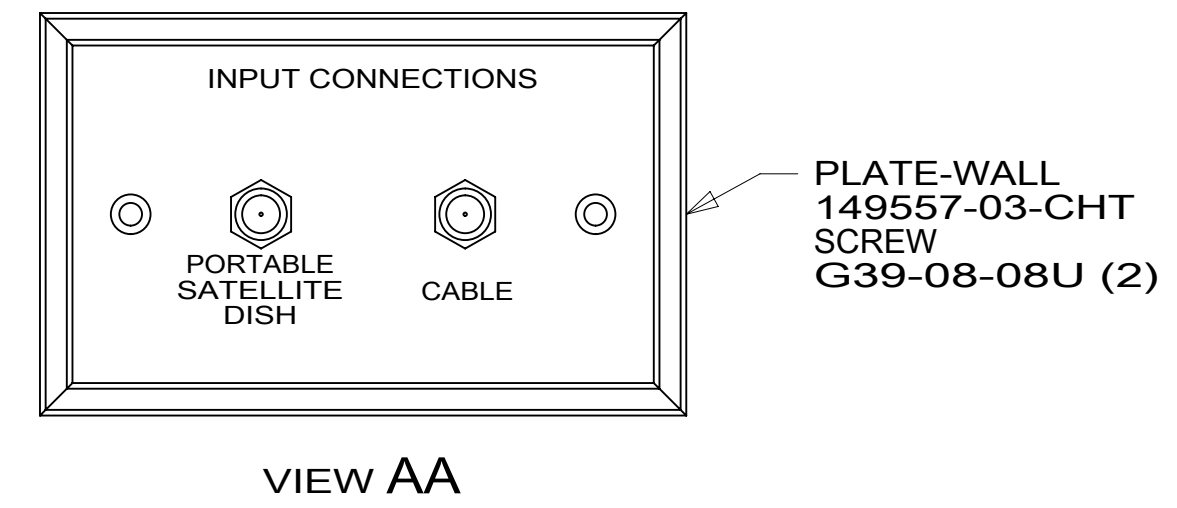

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000



FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1DF EXT TV ENTERTAINMENT CENTER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 16 L34T
DESCRIPTION: WIRING INSTL-BODY, 12V	
SHEET: 1 OF 9	ITEM/PART NO: 000177498 / 30137901000
REF:	1 20-Sep-2016

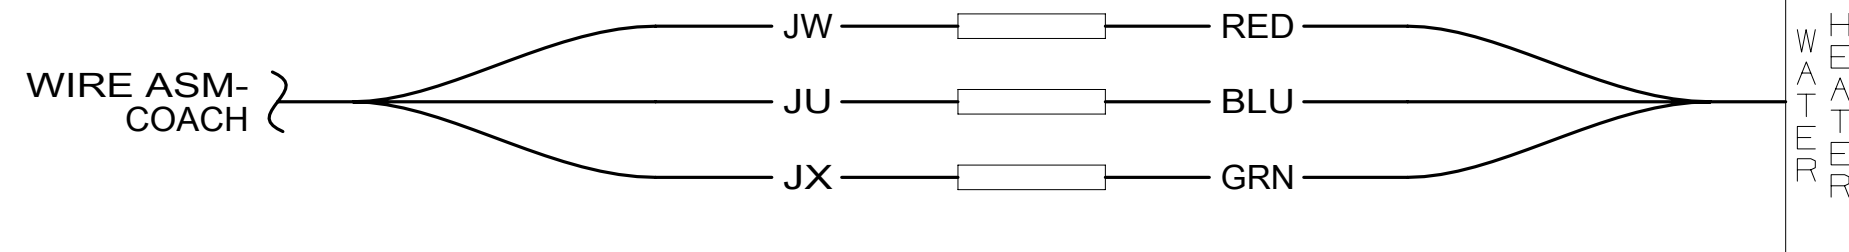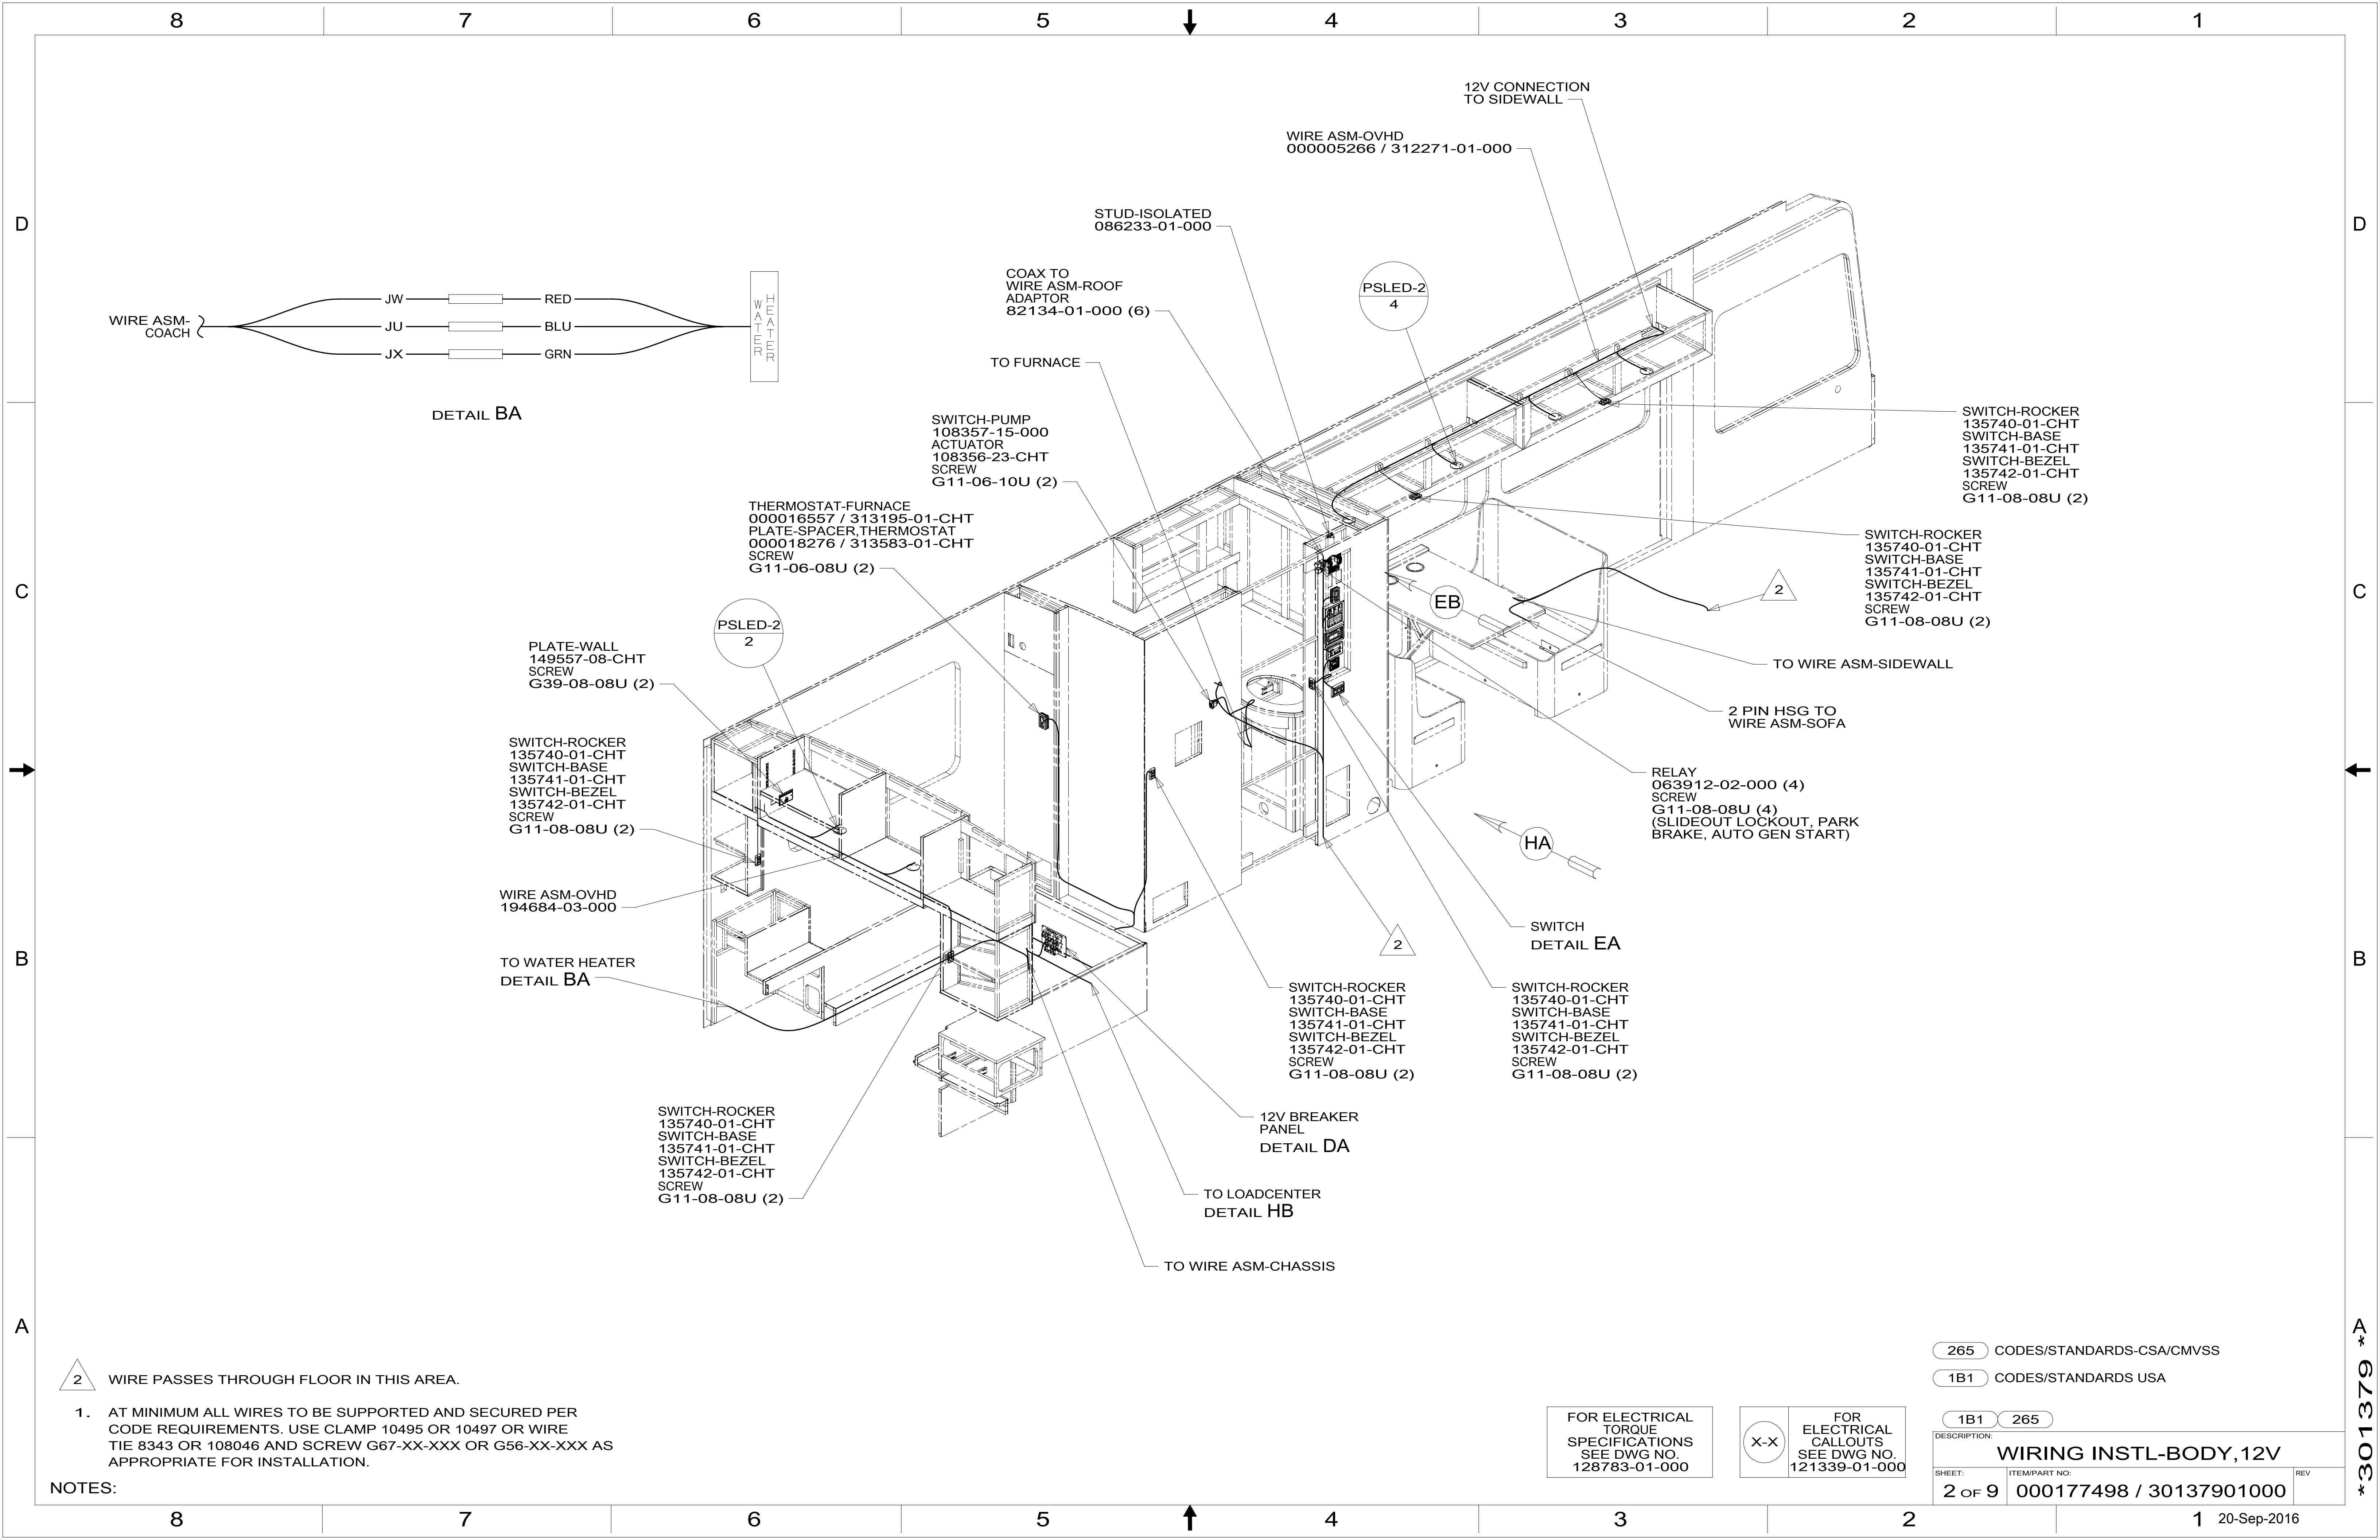

2 WIRE PASSES THROUGH FLOOR IN THIS AREA.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:
WIRING INSTL-BODY, 12V


SHEET: 2 OF 9 ITEM/PART NO.: 000177498 / 30137901000 REV:

301379

8 7 6 5 4 3 2 1

D

D

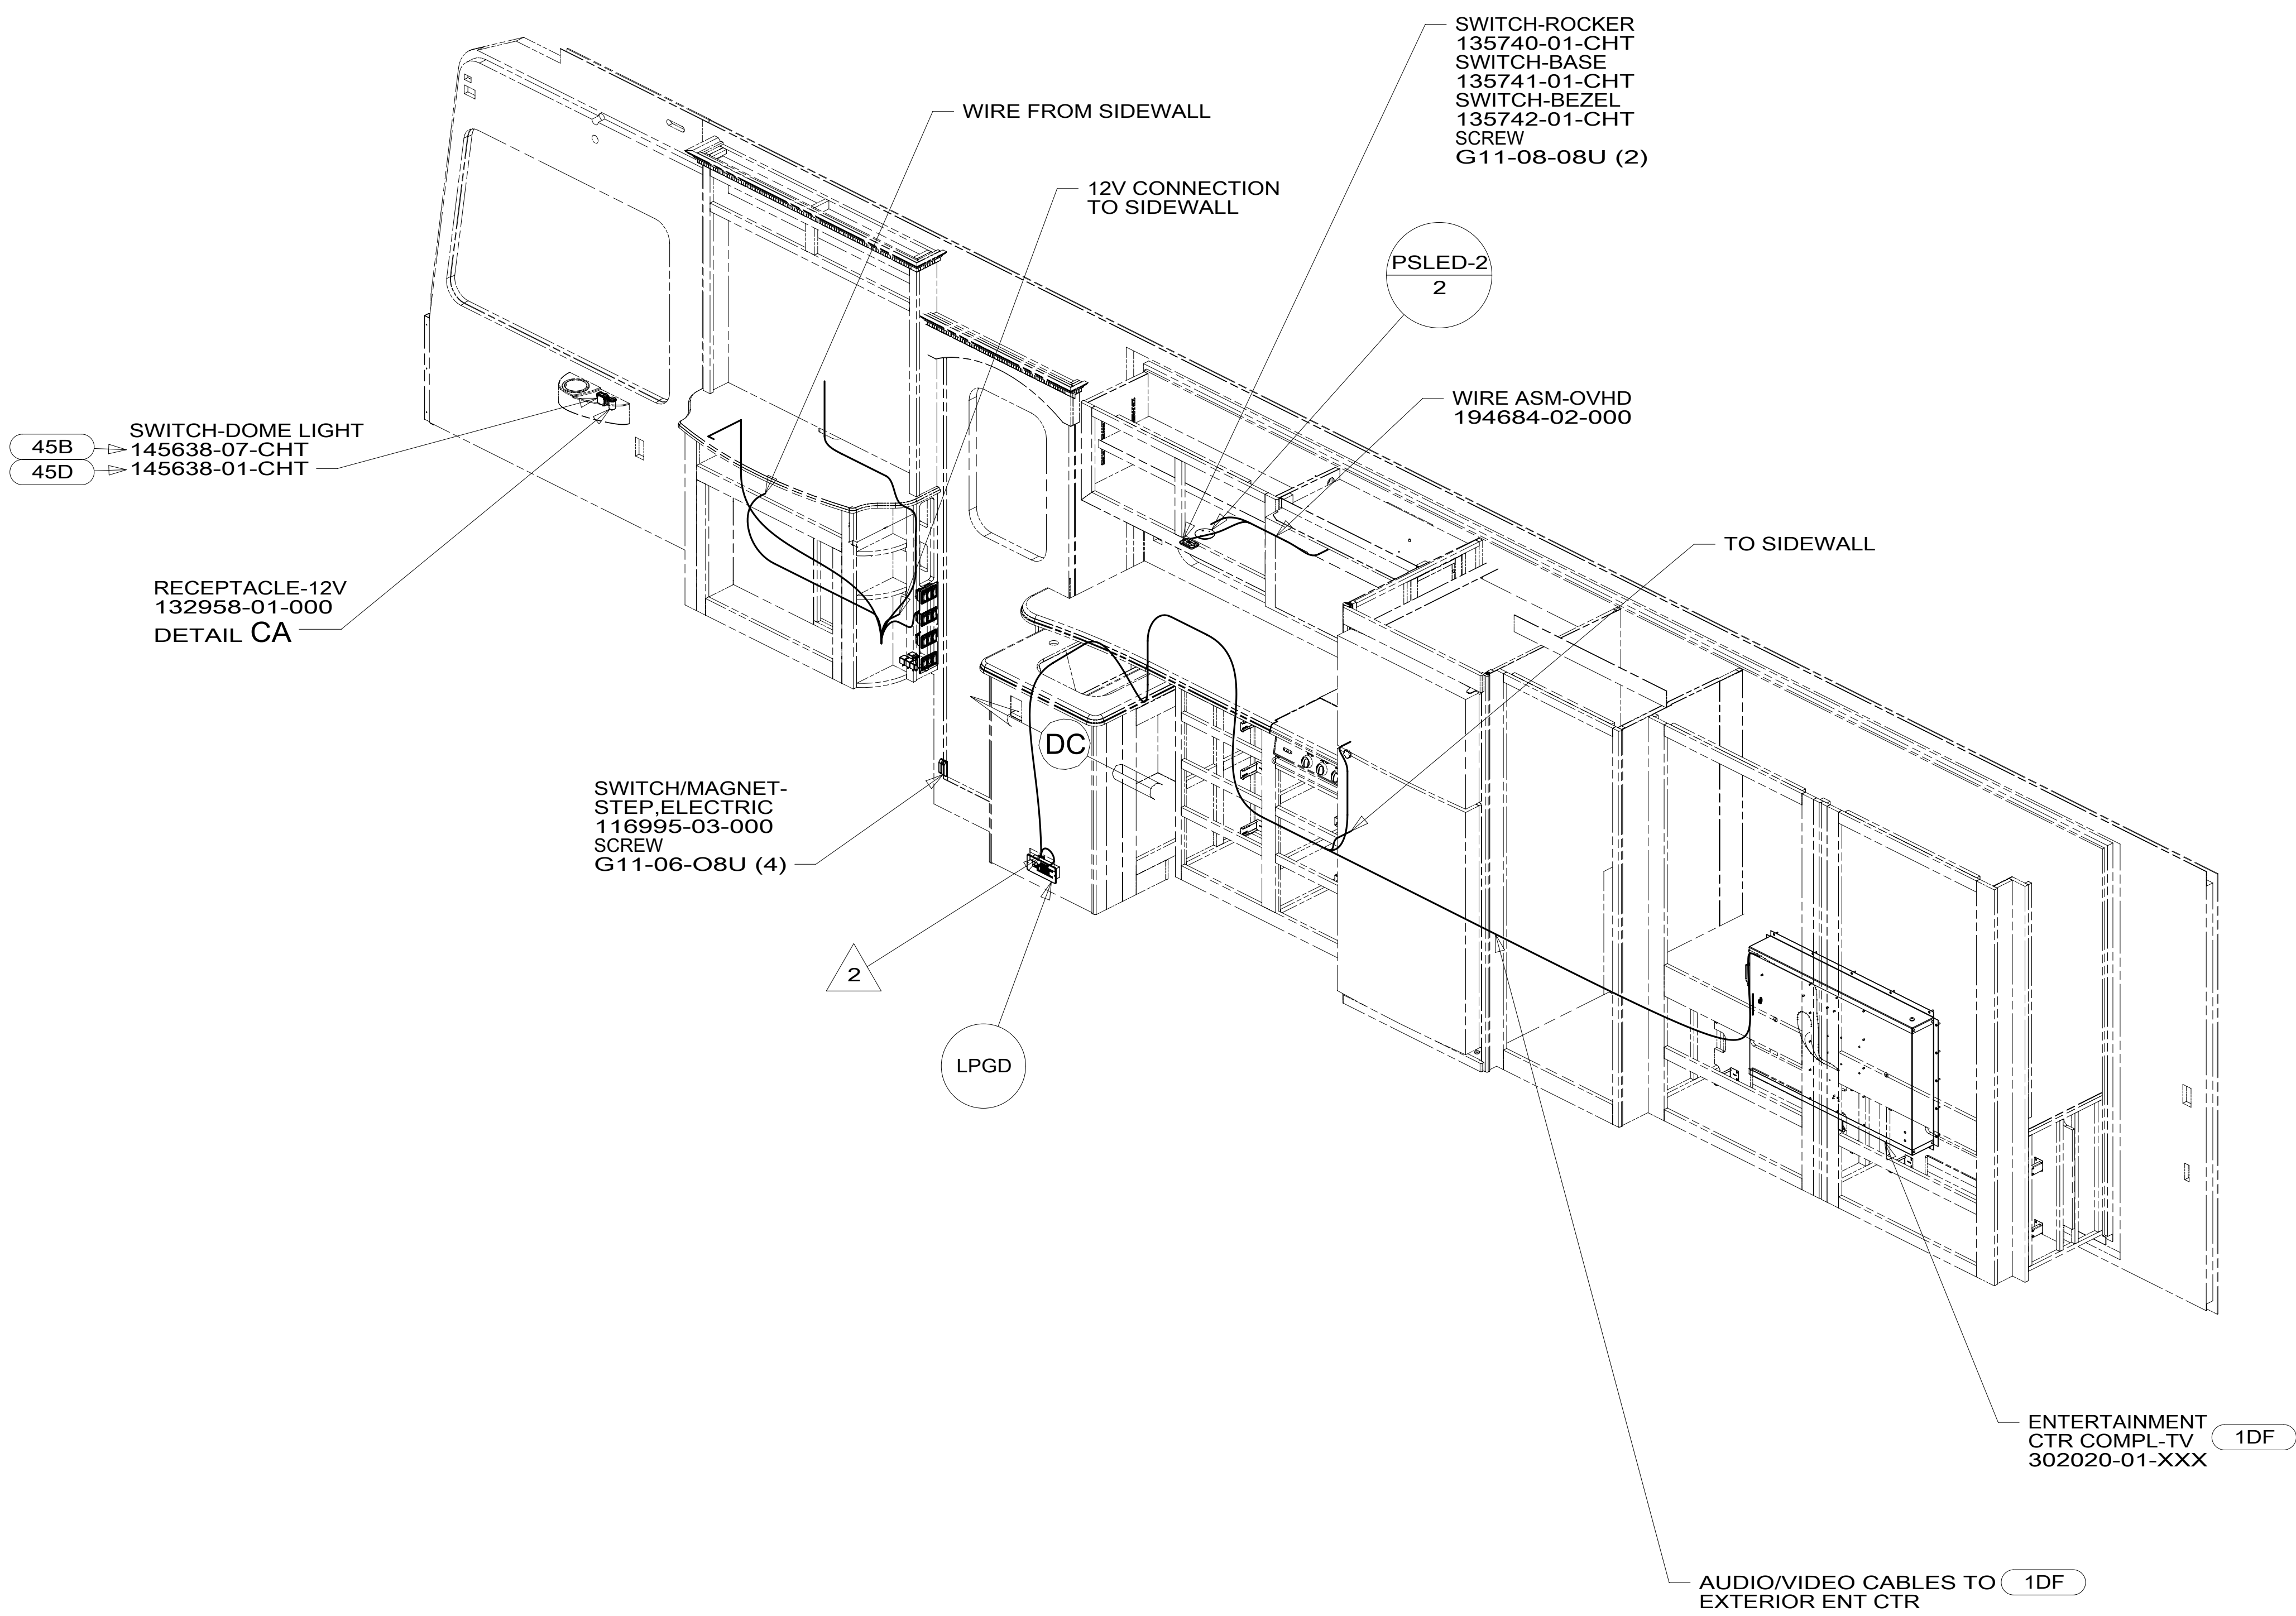

C

C

B

B


A

A

2 WIRE PASSES THROUGH FLOOR IN THIS AREA.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

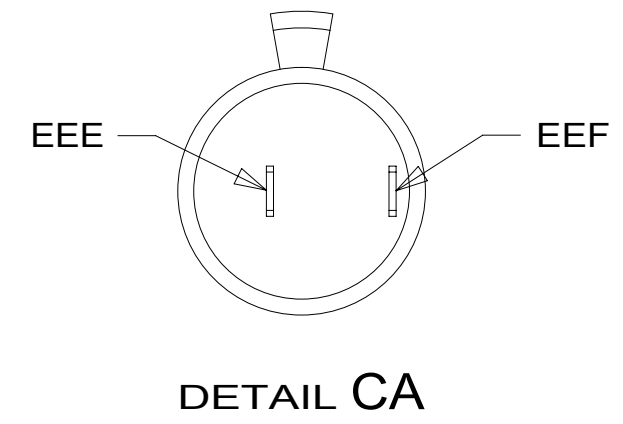

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 45D LOFT BED - WITHOUT
- 45B LOFT BED
- 1DF EXT TV ENTERTAINMENT CENTER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO.:	REV:	
3 OF 9	000177498 / 30137901000		

8 7 6 5 4 3 2 1 20-Sep-2016

*301379 *A

8 7 6 5 4 3 2 1

D

C

B

A

D

C


B

A

J
6 BLK
FROM WIRE
ASM-CHASSIS
SCREW
G39-08-06U

K
6 BLK
FROM WIRE
ASM-CHASSIS
SCREW
G39-08-06U

Z
6 BLK
FROM WIRE
ASM-CHASSIS
SCREW
G39-08-06U

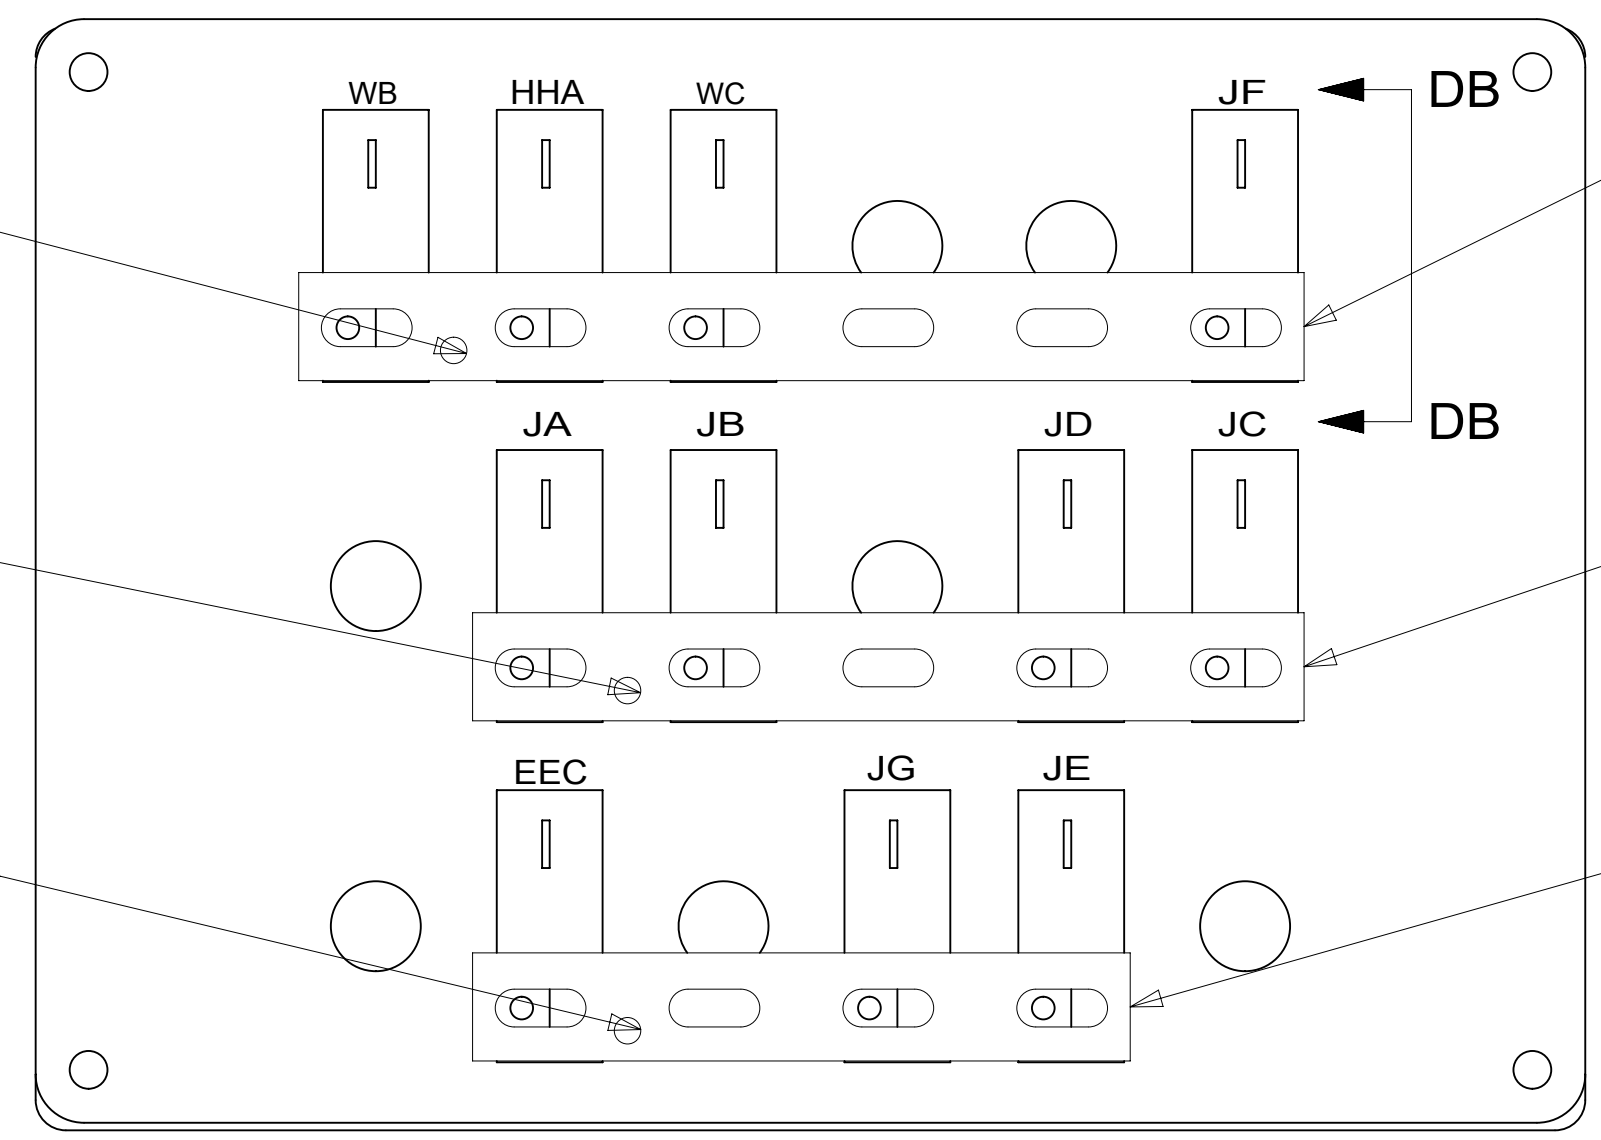


DETAIL DA
(BACK VIEW)

BUSS BAR
141744-05-000
SCREW
G39-08-06U

BUSS BAR
141744-04-000
SCREW
G39-08-06U

BUSS BAR
141744-03-000
SCREW
G39-08-06U

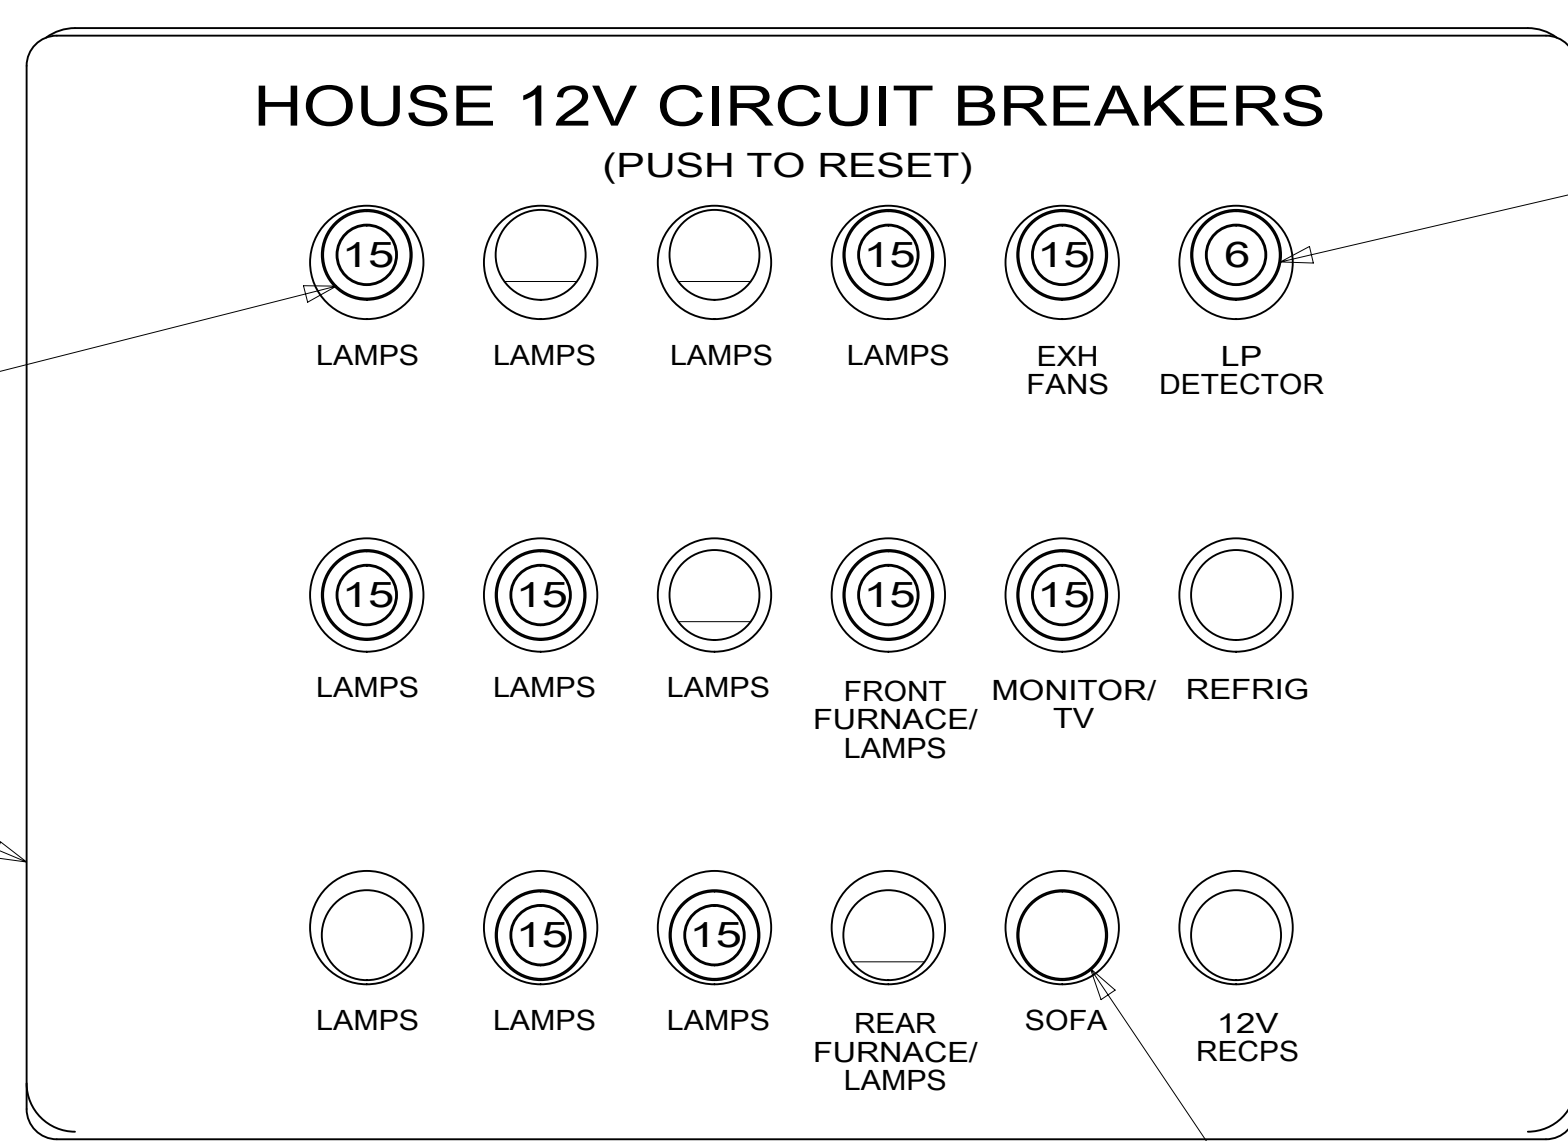

DETAIL DA
(FRONT VIEW)

CIRCUIT BREAKER
93654-02-000 (10)
(15 AMP)
SCREW
G52-06-04U (10)

PLATE
139067-06-CHT
LABEL
92547-14-000
SCREW
G11-10-12U (4)

CIRCUIT BREAKER
93654-01-000
(6 AMP)
SCREW
G52-06-04U

CIRCUIT BREAKER
182283-01-000
(20 AMP)
SCREW
G52-06-04U

PLATE-SWITCH
176859-07-CHT
SCREW
G67-10-12U (6)

SWITCH-BLANK
145754-01-CHT

SWITCH-COACH LIGHTS
174757-17-CHT

SWITCH-COMPT LIGHTS
174757-21-CHT

PANEL-SWITCH,3-WAY
174834-02-CHT (4)

SWITCH-PATIO AWNING
174757-03-CHT

SWITCH-AWNING POWER
174757-19-CHT

SWITCH-REAR AWNING
174757-36-CHT

SWITCH-AWNING LIGHT
174757-38-CHT

SWITCH-AWNING LIGHT
174757-38-CHT

SWITCH-AUTO LEVEL
174757-04-CHT


SWITCH-ENTRY STEP
174757-27-CHT

SWITCH-CHASS BATT DISC
174757-06-CHT
WIRE ASM-THERM
186796-01-000


SWITCH-COACH BATT DISC
174757-07-CHT
WIRE ASM-THERM
186796-01-000

RELAY
063912-02-000 (5)
SCREW
G11-08-08U (5)
(FRONT AWNING, REAR
AWNING, AWNING LOCKOUT)

DETAIL DC

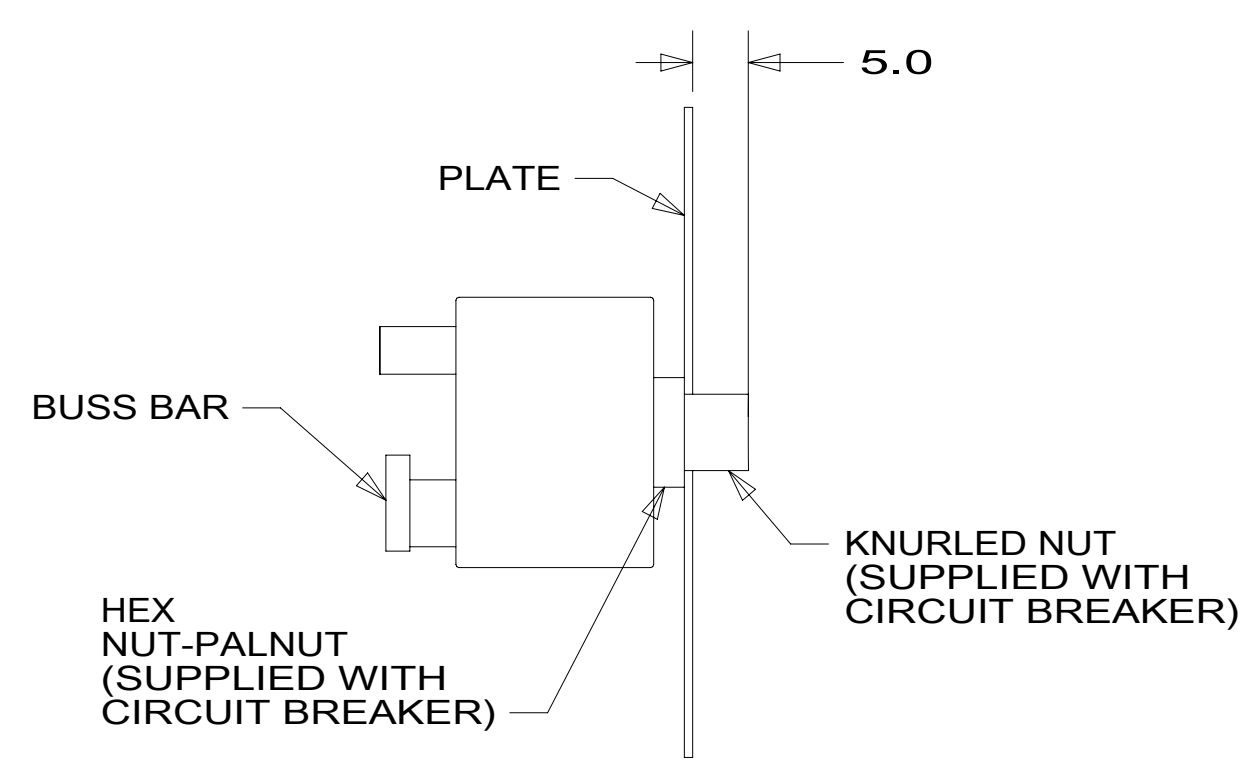

VIEW DB-DB

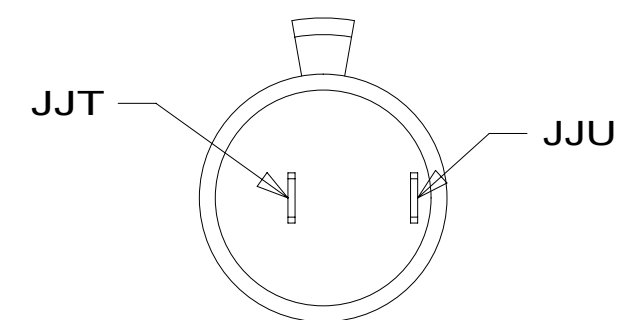

DETAIL DD

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


DESCRIPTION: WIRING INSTL-BODY, 12V		
SHEET: 4 OF 9	ITEM/PART NO: 000177498 / 30137901000	REV
		1 20-Sep-2016

*301379 *A

8 7 6 5 4 3 2 1

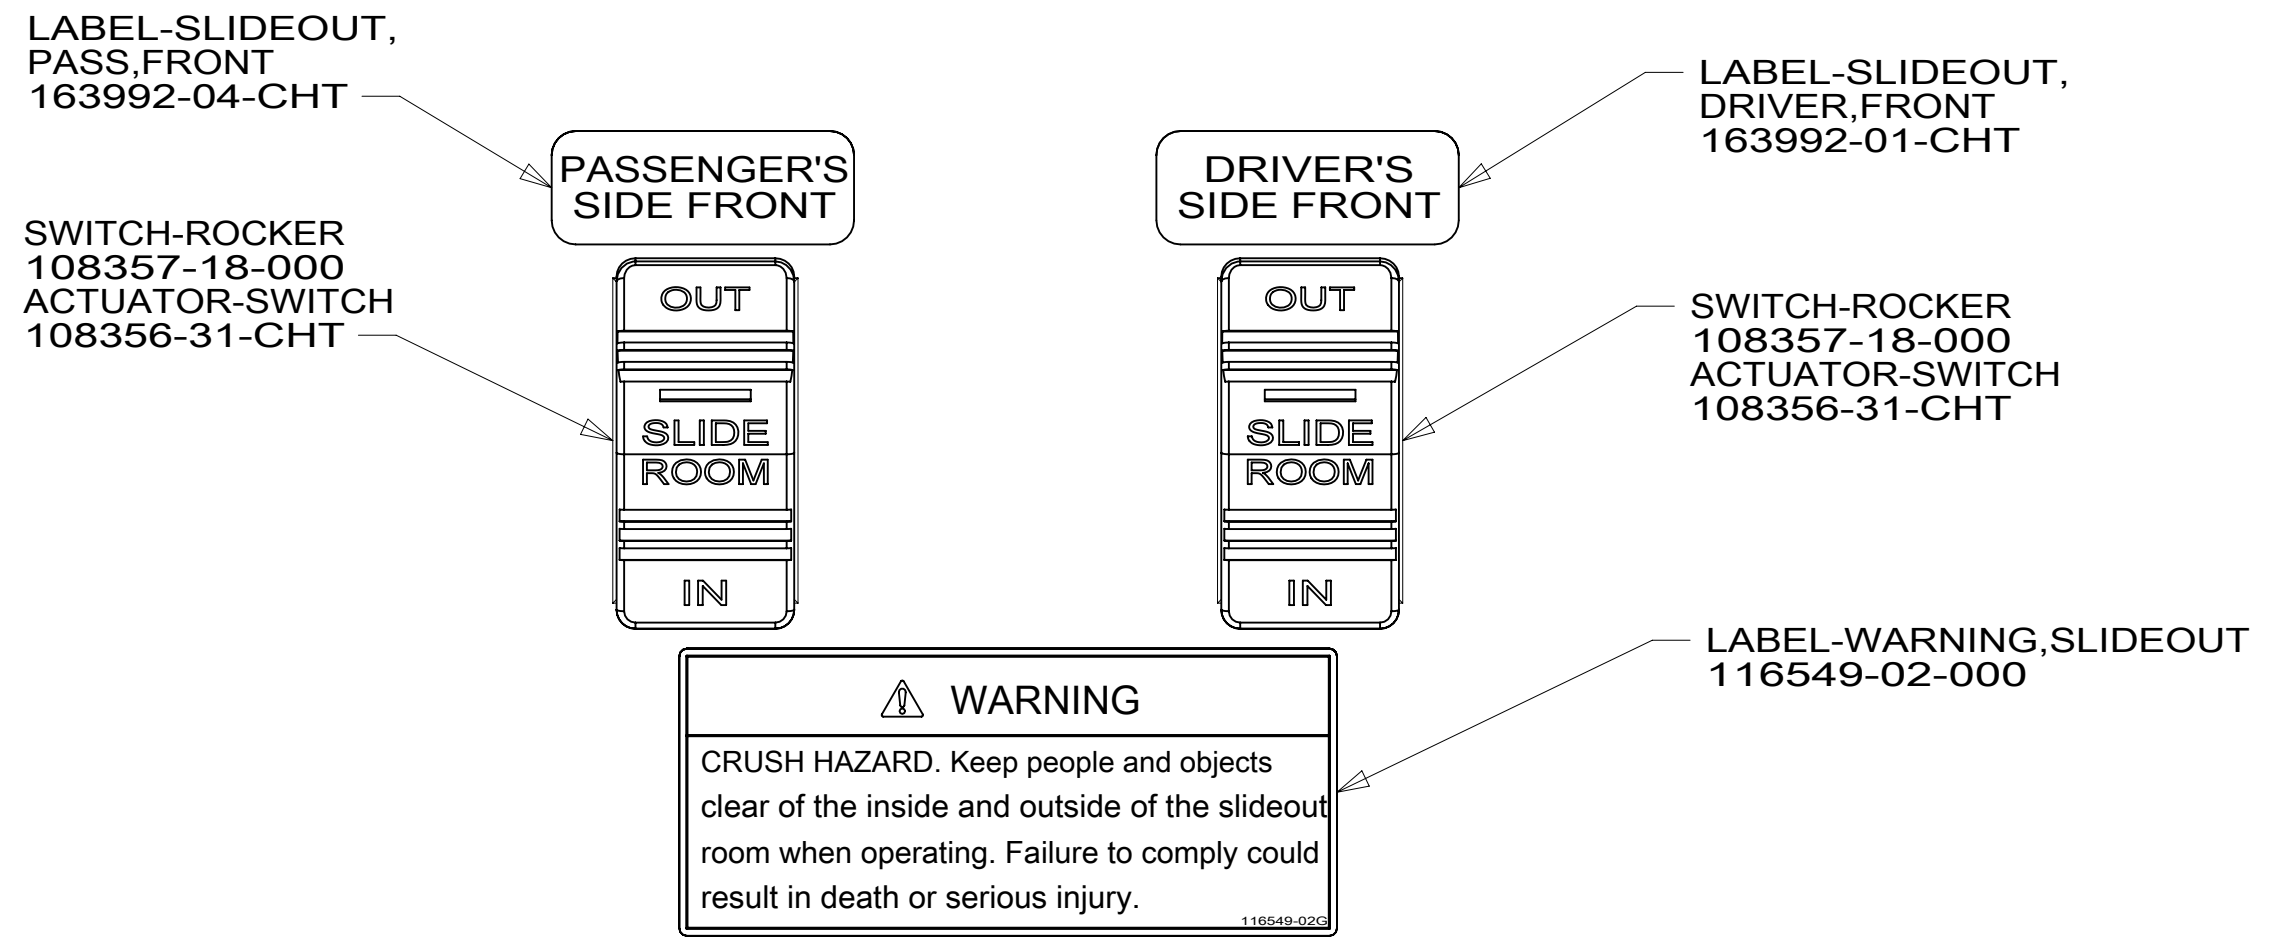

DETAIL EB

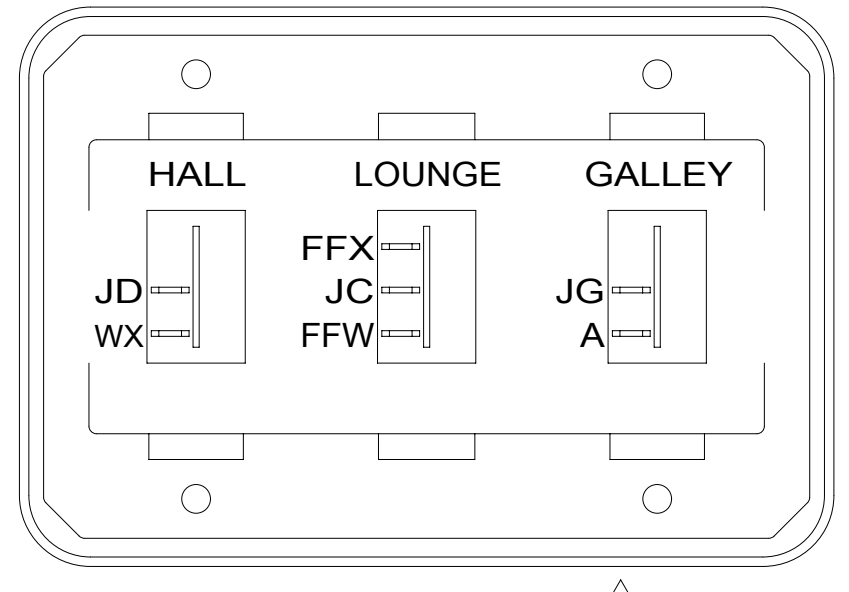

- SWITCH-ROCKER 135740-01-CHT (2)
- 135740-02-CHT
- SWITCH-BASE 135741-03-CHT
- SWITCH-BEZEL 135742-03-CHT
- SCREW G11-08-08U (4)

DETAIL EA 1

1 SWITCHES ARE NOT LABELED. LABELS ARE SHOWN FOR INFORMATION ONLY.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


DESCRIPTION:		1B1 265	
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO.:	REV	
5 OF 9	000177498 / 30137901000		

8 7 6 5 4 3 2 1

*301379 *A

8 7 6 5 4 3 2 1

D
C
B
A

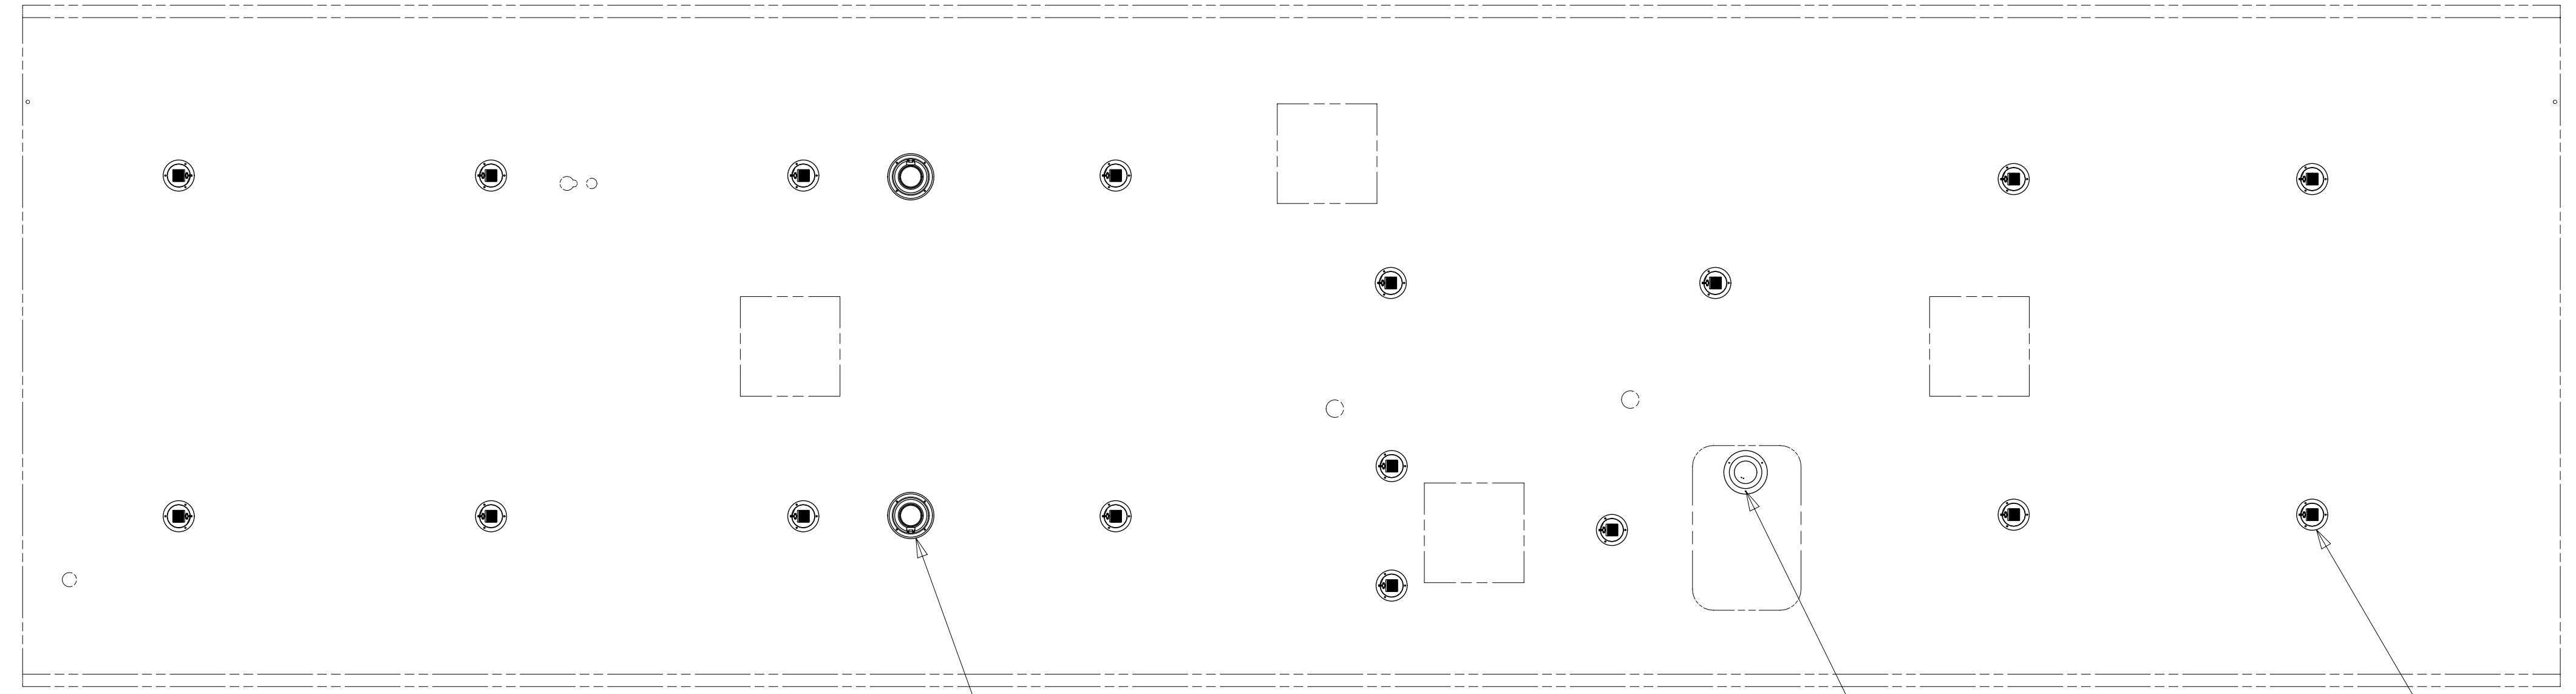

SPEAKER-5-1/4"
180783-01-CHT (2)
SCREW
G11-08-12U (8)

LSH-3

PRLED-4
17

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265	
DESCRIPTION: WIRING INSTL-BODY, 12V	
SHEET: 6 OF 9	ITEM/PART NO: 000177498 / 30137901000
REV	

8 7 6 5 4 3 2 1

*301379 *A

8

7

6


5

4

3

2

1

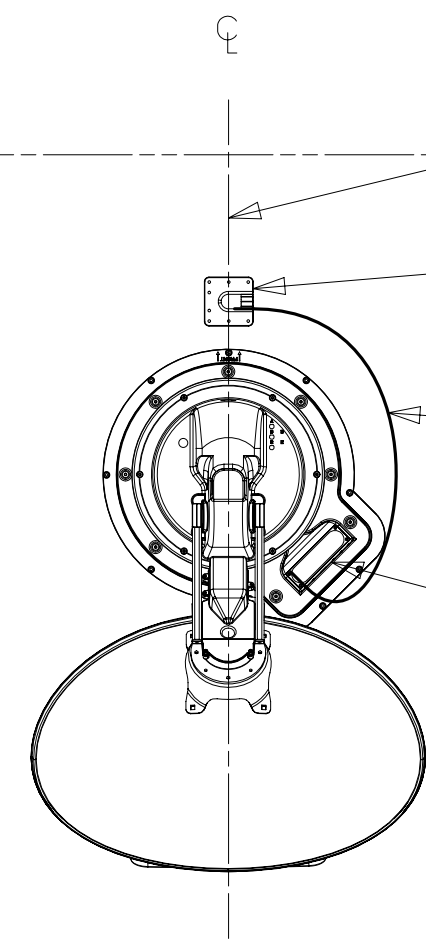

DETAIL GA

THE SATELLITE DISH AND WIRE CONNECTIONS ARE TO BE PLACED ON THE CENTERLINE OF THE MOTORHOME FACING FORWARD.

SEPARATE CABLES AND INSTALL WIRE COVER OVER HOLE IN ROOF ASM WITH CABLES EXITING ON PASSENGERS SIDE.

WHEN APPLYING ROOF SEALANT TO SATELLITE DISH, PLACE ROOF SEALANT HERE (APPROX. 75MM WIDE) AND PUSH THE CABLES INTO THE SEALANT TO STABILIZE THEM.


CONNECT CABLE ASM-COAX FROM ROOF ASM TO COAX CABLES ON SATELLITE DISH AND CONNECT 10' CABLE-DATA FROM ROOF ASM TO DATA CABLE FROM SATELLITE DISH AND PLACE ALL CONNECTIONS BACK INTO ROOF ASM.

1 783 DA-4
DETAIL GA

1 193 ANT-5

RED-GR
BLK-HHB

RED-KJ
BLK-HHB

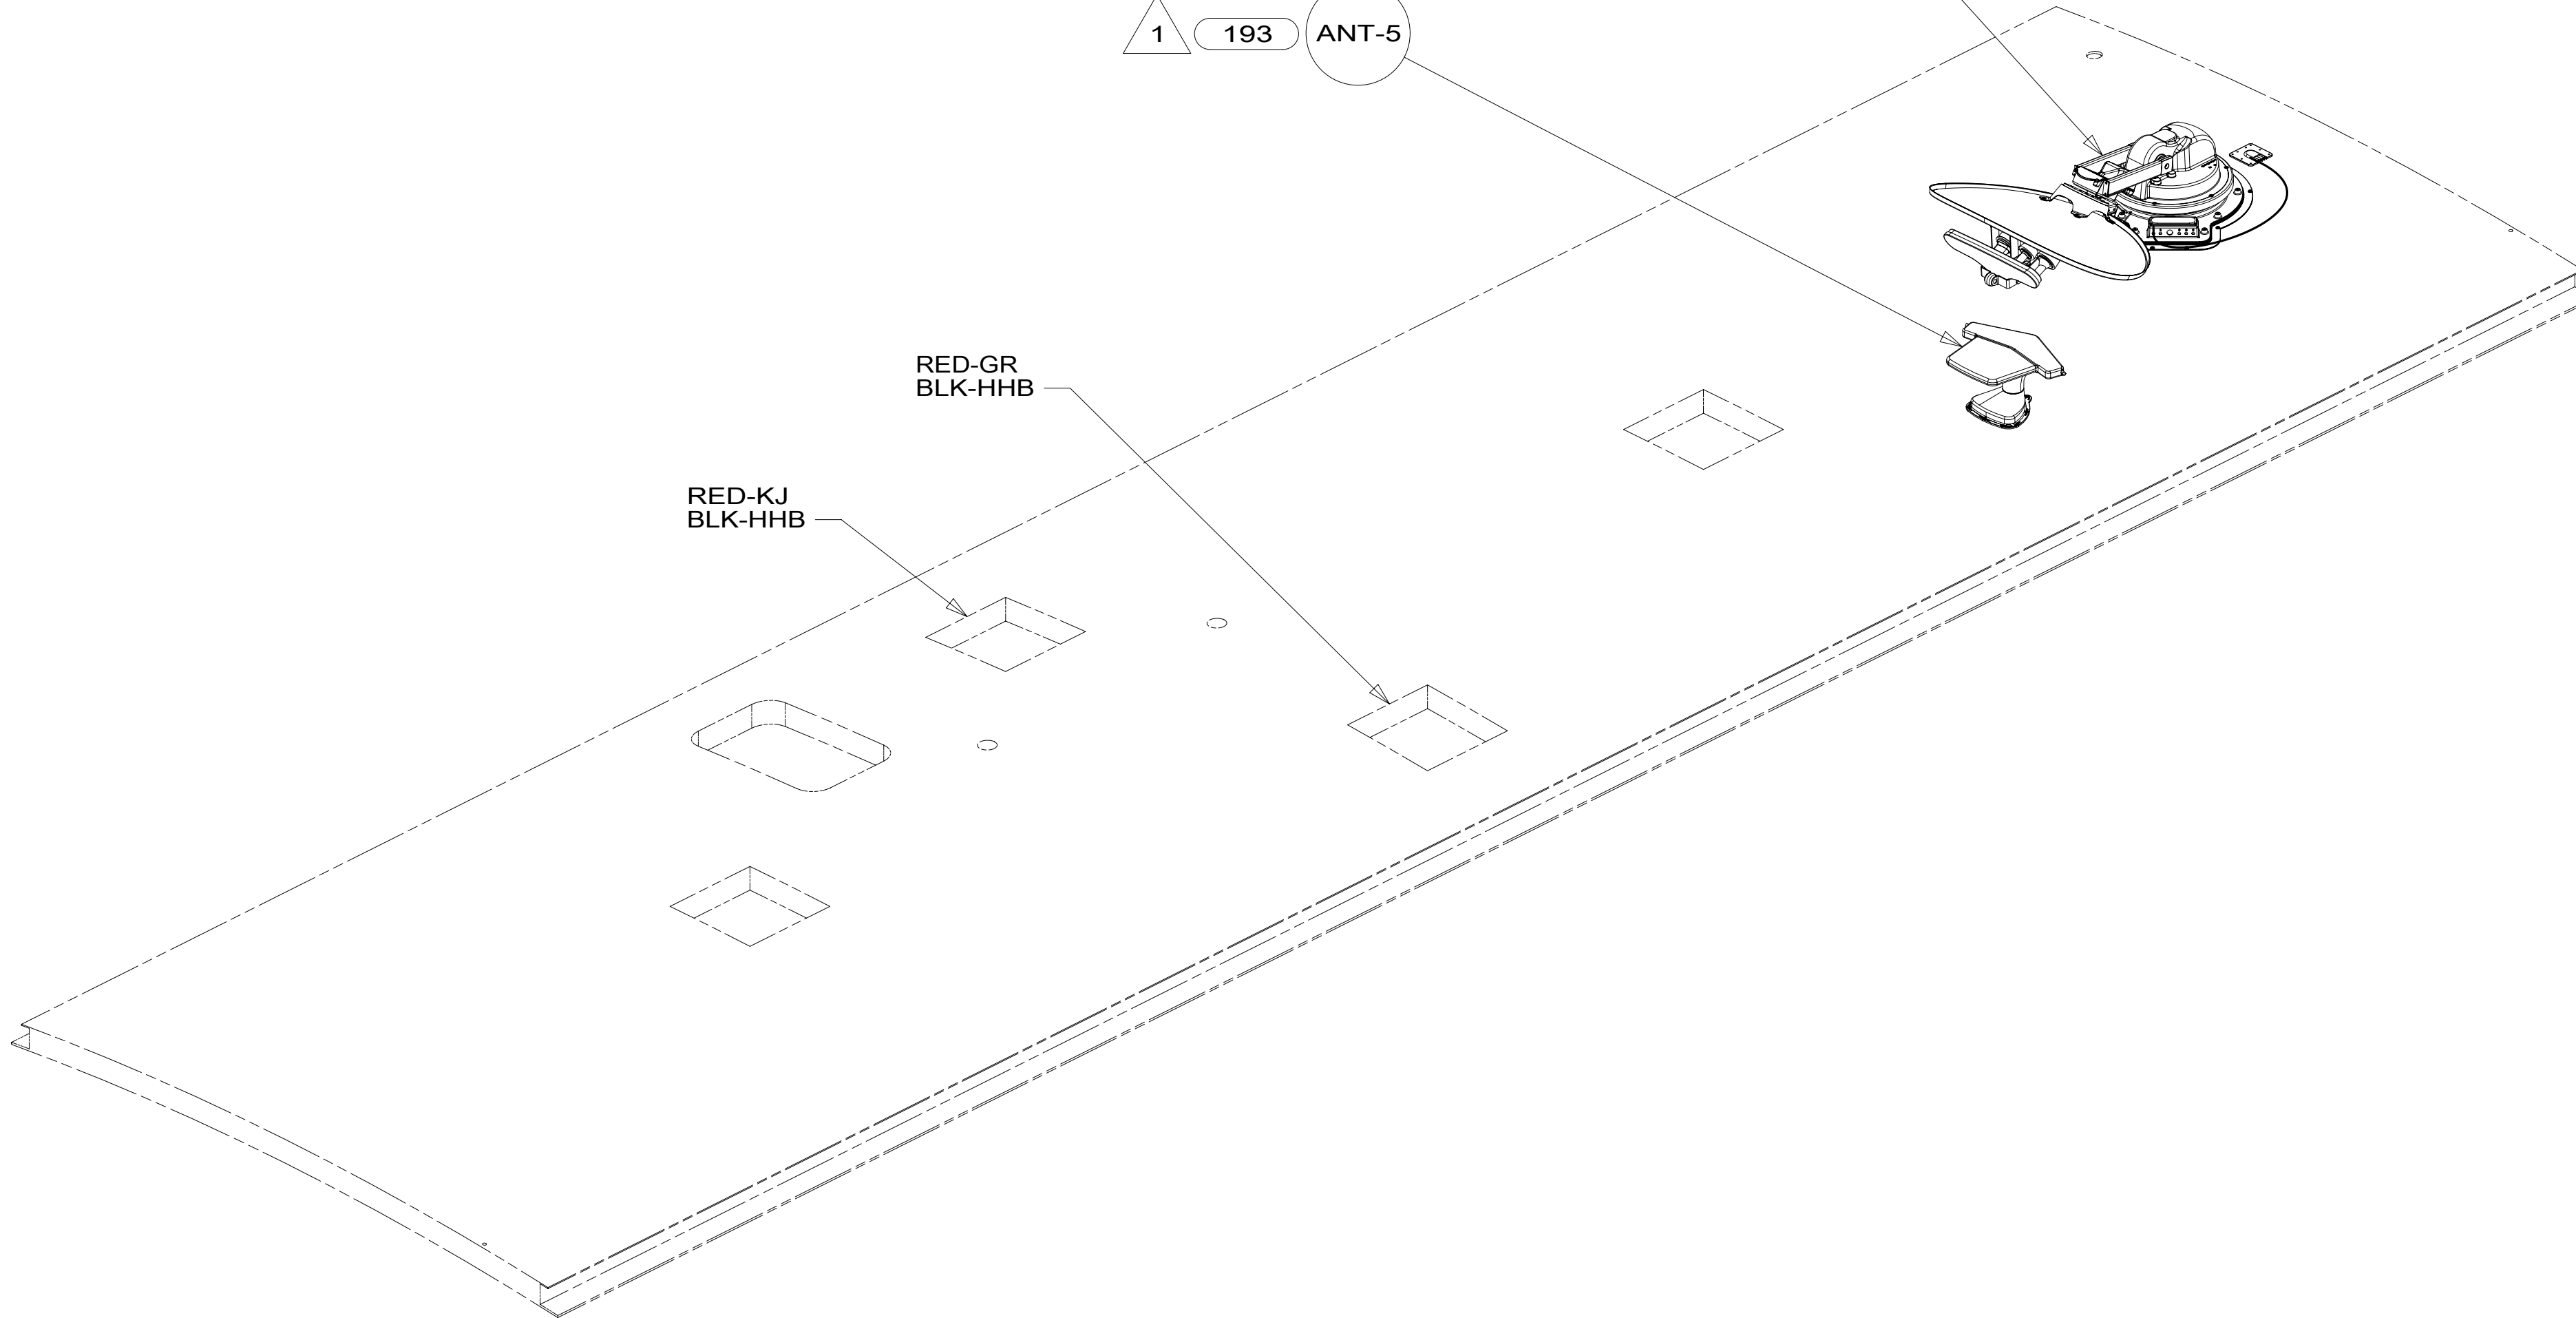

1 SEE MANUFACTURER'S INSTALLATION FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 783 SATELLITE HD TV SYSTEM AUTOC
- 193 TV ANTENNA-AMPLIFIED SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1	265
DESCRIPTION: WIRING INSTL-BODY, 12V	
SHEET: 7 OF 9	ITEM/PART NO: 000177498 / 30137901000
REV	

8

7

6

5

4


3

2


1

20-Sep-2016


*301379 *A

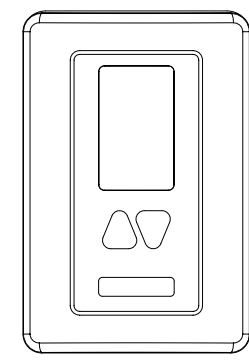


THERMOSTAT
000016270 / 313193-01-CHT
PLATE-SPACER,THERMOSTAT
000018276 / 313583-01-CHT
SCREW
G11-06-08U (2)

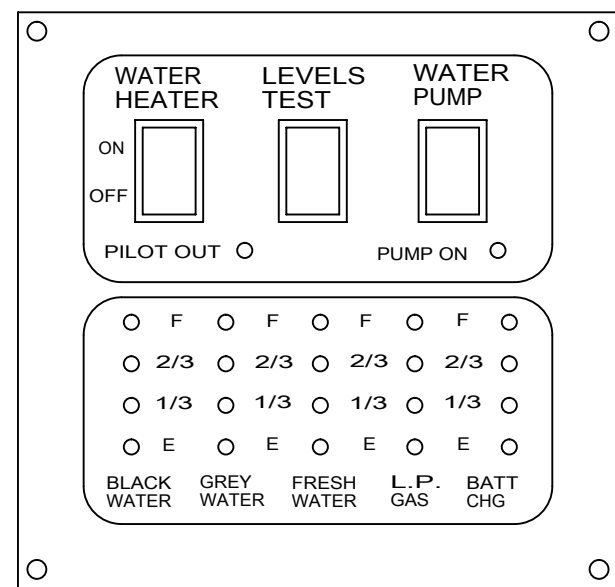


MONITOR-PANEL
134940-10-CHT
SCREW
G11-08-08U (4)

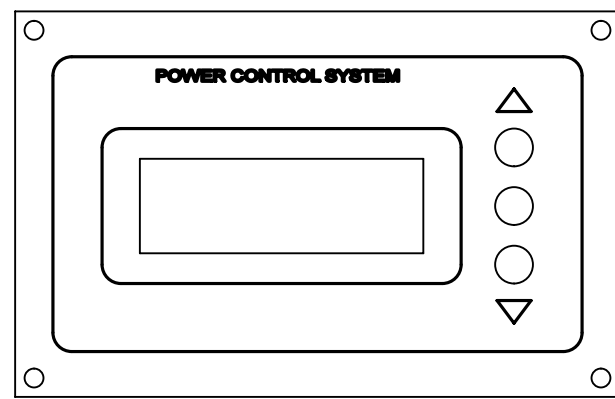

PANEL-MONITOR,
PCS 50 AMP
174384-06-000
SCREW
G11-08-08U (4)

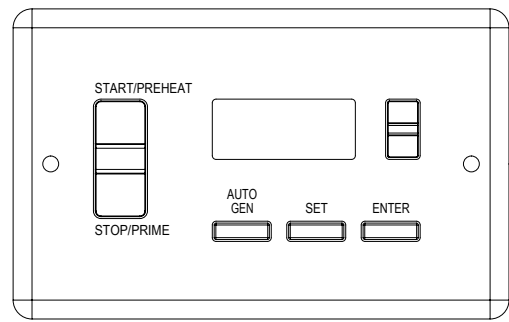


MODULE-AUTO
GENERATOR START
158425-01-000 1



REMOTE PANEL-
INVERTER
175385-02-000
SCREW
G11-08-08U (2) 2

DETAIL HA

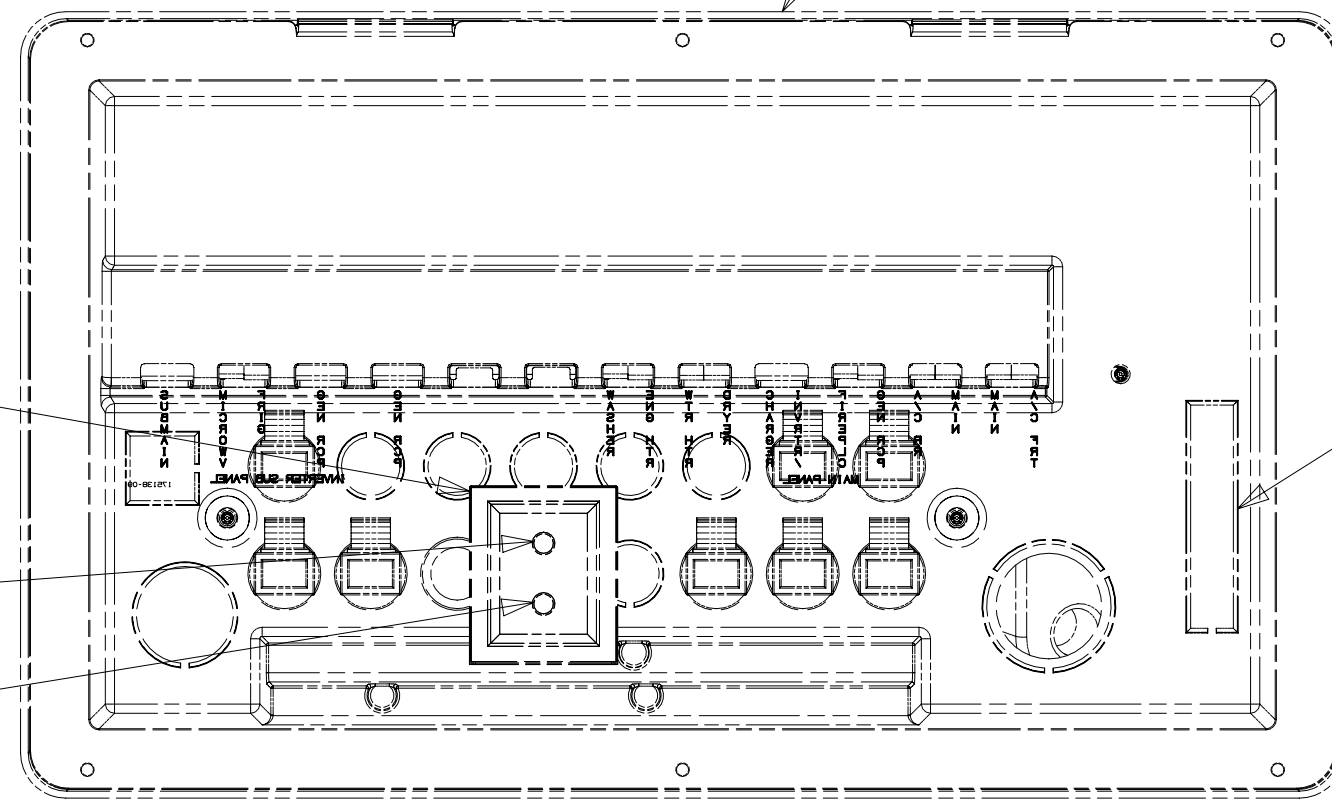

VIEW HB


3 TRANSFORMER
(REF)

SSG

SSH

110V LOAD CENTER
(REF)

WIRE ASM-COACH
REMOVE KNOCKOUT
DETAIL HC

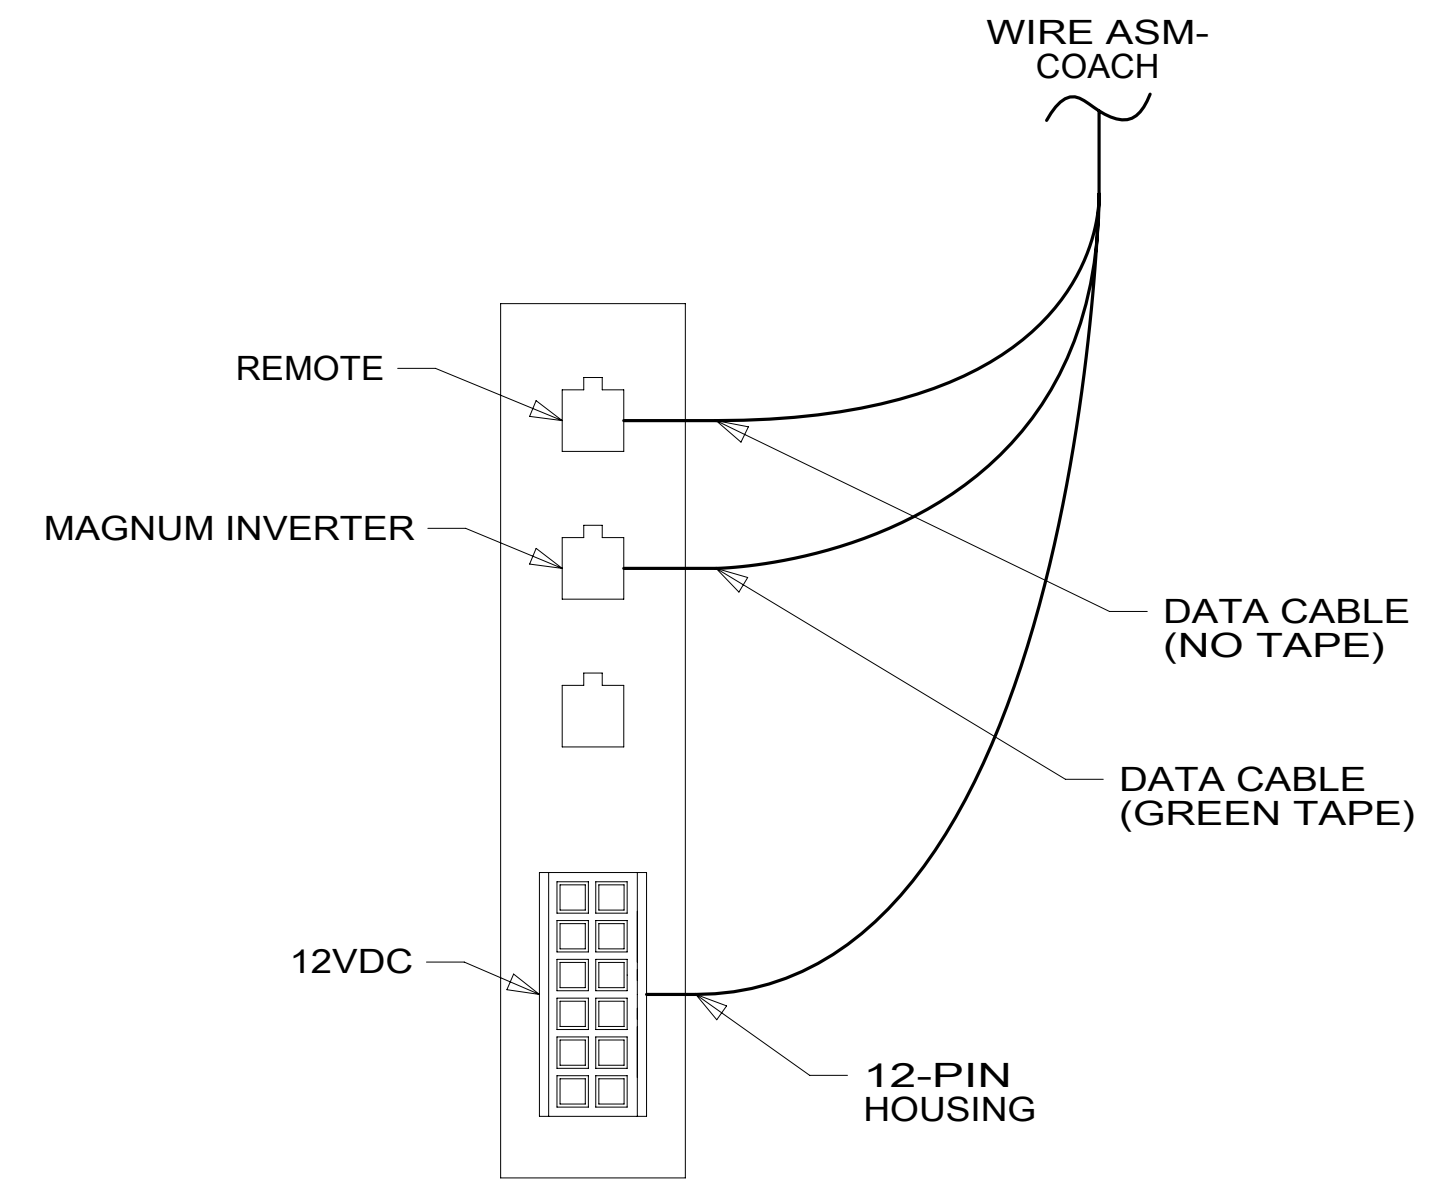

DETAIL HC

3 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

2 SET 'BAT TYPE' TO 'FLOOD'
SET 'LBCO' TO '11VDC'
SET 'BAT AHRS' TO '400 AH'
SEE OPERATORS MANUAL FOR SETUP PROCEDURE.

1 SET 'GEN TYPE' TO MATCH GENERATOR MODEL INSTALLED IN COACH.
SET 'SAFE TYPE' TO 'IGNITION'.
SEE OPERATORS MANUAL FOR SETUP PROCEDURE.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265




FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DESCRIPTION: WIRING INSTL-BODY, 12V		
SHEET: 8 OF 9	ITEM/PART NO: 000177498 / 30137901000	REV

*301379 *A

8 7 6 5 4 3 2 1

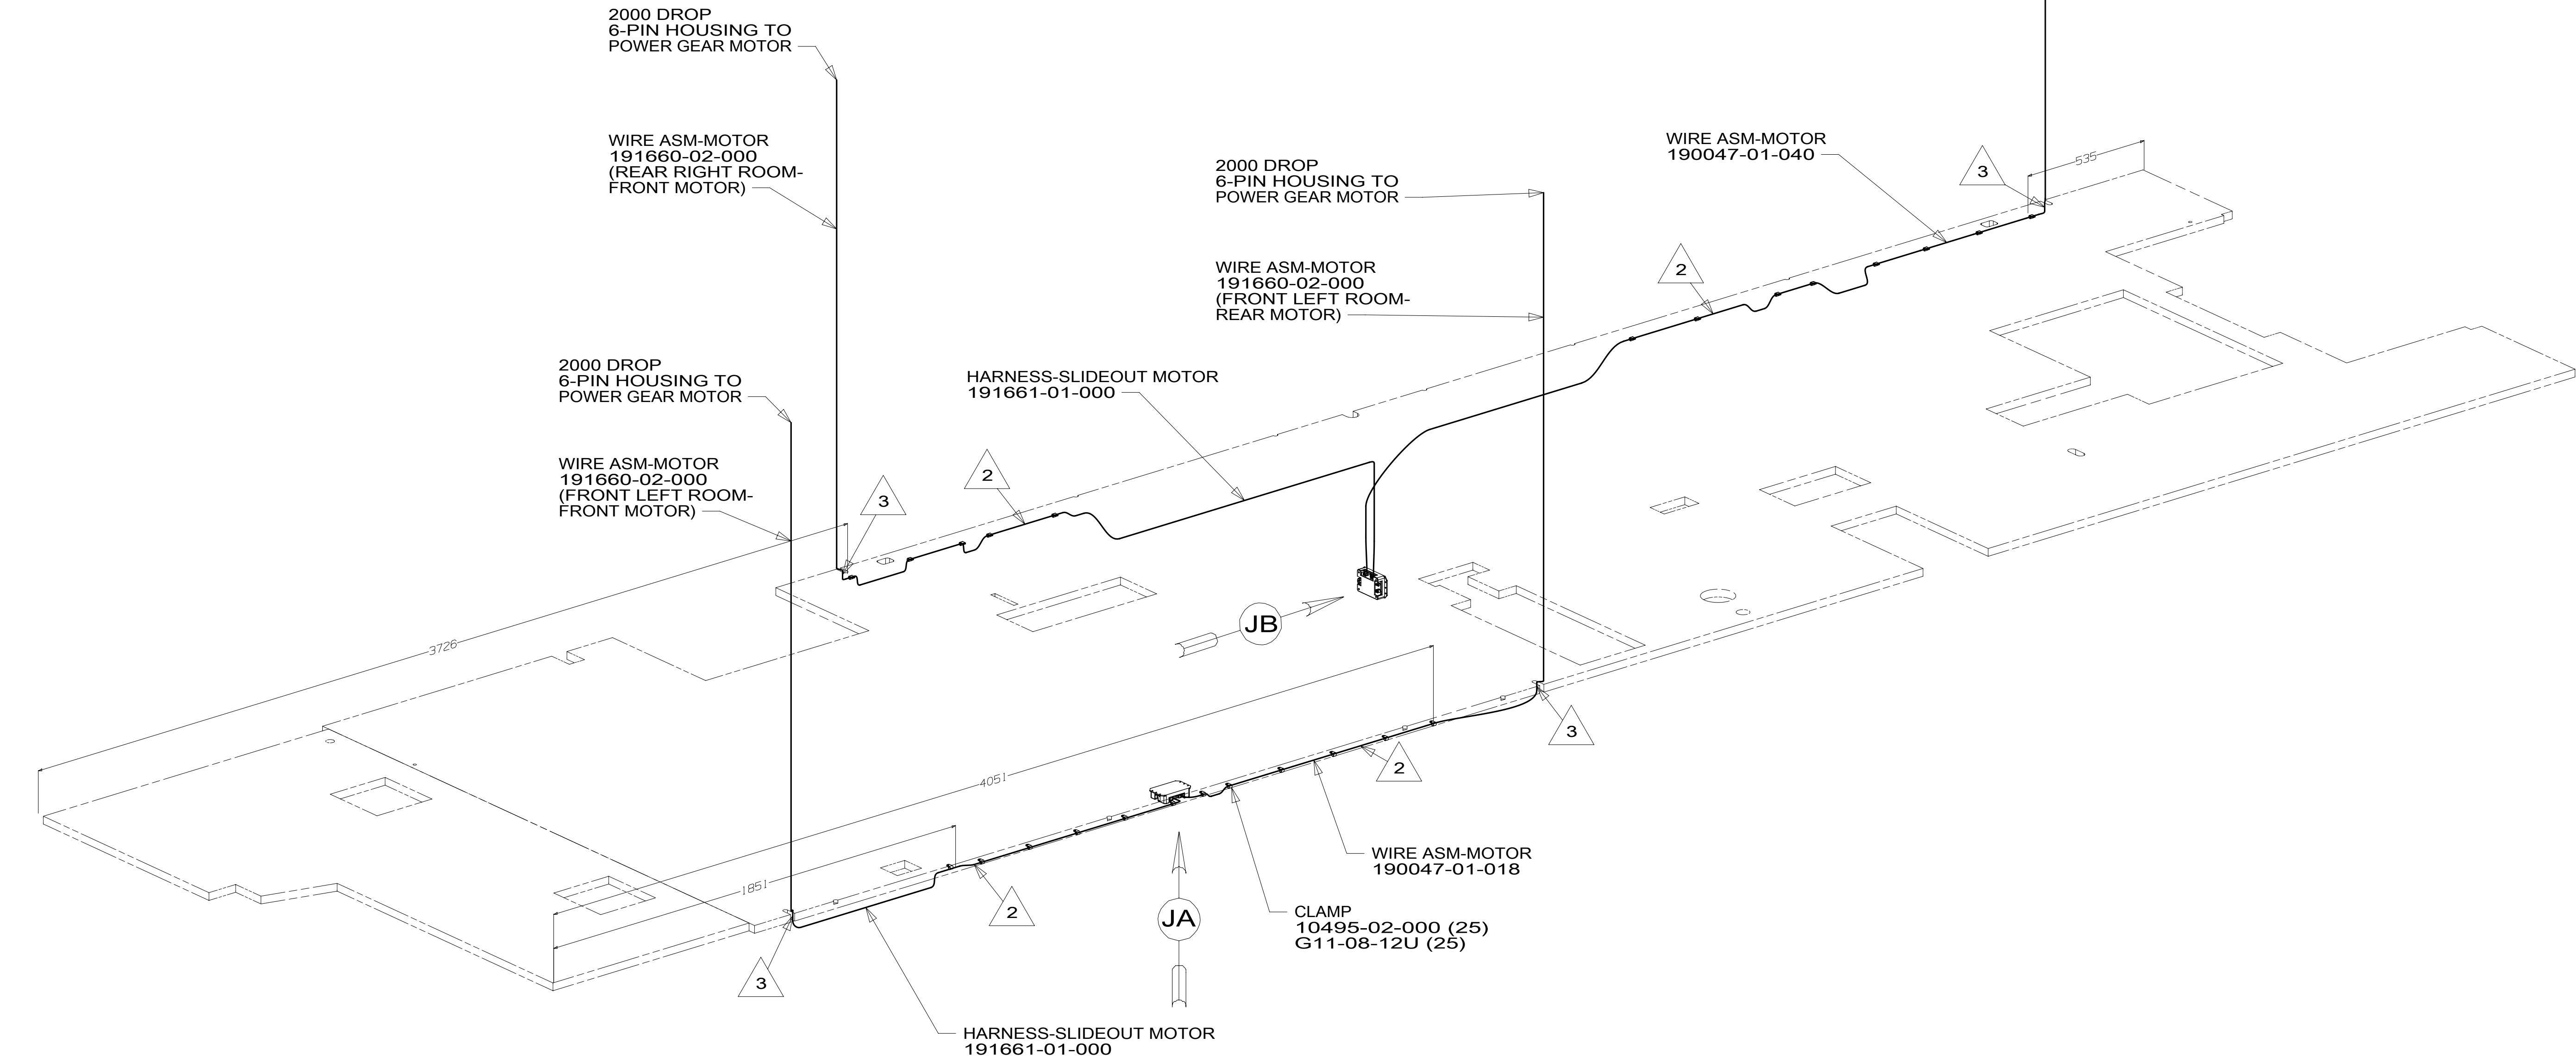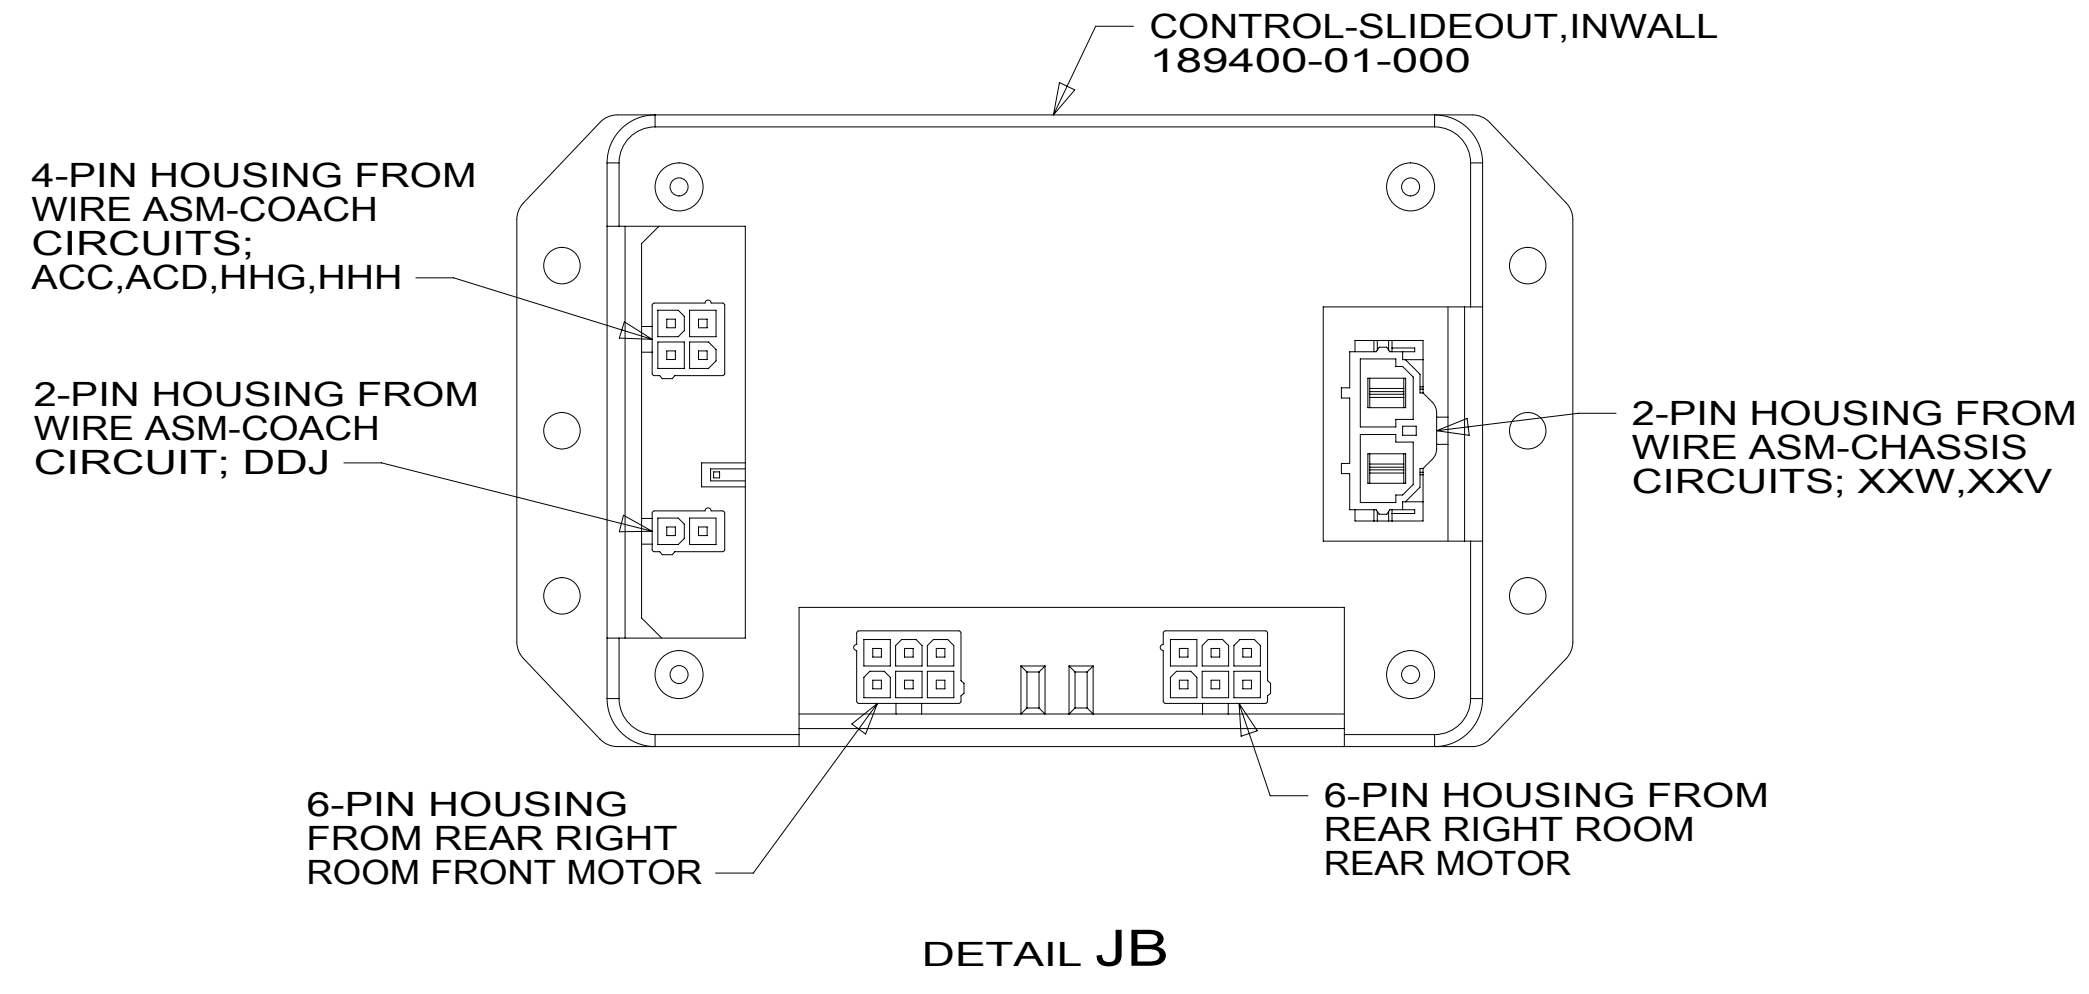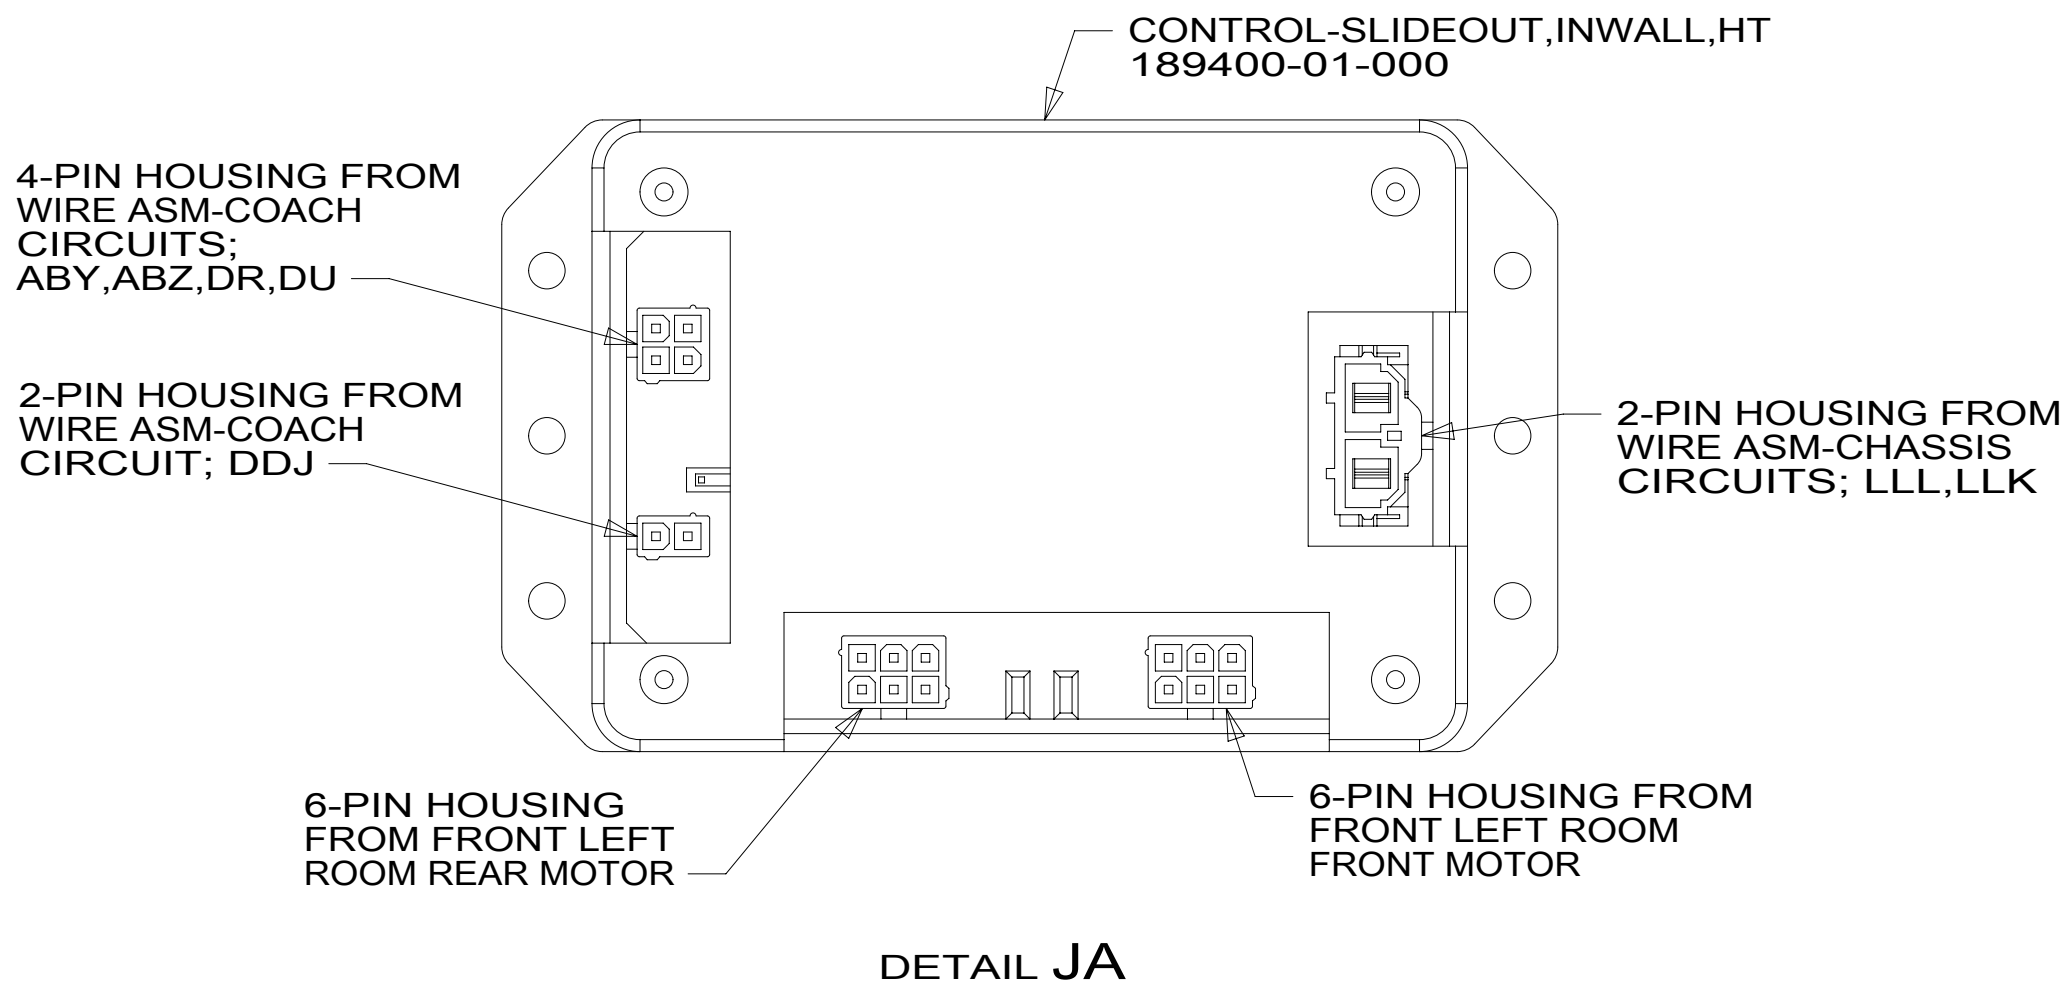

- 3 WIRE IS ROUTED THROU FLOOR IN THIS AREA.
 - 2 WIRE IS ROUTED BELOW FLOOR.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR WIRE TIE 8343-02-000 EVERY 600MM, UNLESS OTHERWISE SPECIFIED.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		1B1 265	
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO.:	REV	
9 OF 9	000177498 / 30137901000		

8 7 6 5 4 3 2 1

*301379 *A